AD A074666

USAFETAC/DS-79/040

DATA PROCESSING DIVISION
USAF ETAC
Air Weather Service (MAC)

REVISED UNIFORM SUMMARY OF
SURFACE WEATHER OBSERVATIONS

SAVANNAH GEORGIA/HUNTER AAF WBAN# 13824
N 32 01 W 81 08 ELEV. 52 FT SVN WMO#

PARTS A-F
POR FROM HOURLY OBS JAN 48-MAR 69,
MAY 69-MAY 70
POR FROM DAILY OBS JAN 48-JAN 69

NOV 18 1970

FEDERAL BUILDING
ASHEVILLE, N. C.

"THIS DOCUMENT HAS BEEN APPROVED FOR PUBLIC RELEASE AND SALE; ITS DISTRIBUTION IS UNLIMITED."

89-4820/b

79 09 11 182

Best
Available
Copy

Review and Approval Statement

This report is approved for public release. There is no objection to unlimited distribution of this report to the public at large, or by DDC to the National Technical Information Service (NTIS)

This technical report has been reviewed and is approved for publication.

James R. Millican

FOR THE COMMANDER

Walter S. Burgmann

WALTER S. BURGMANN
Scientific & Technical
Information Officer

DATA PROCESSING SHEET

PHOTOGRAPH THIS SHEET

LEVEL 1

INVENTORY

DDC ACCESSION NUMBER

USAFETAC/DS-79/040

DOCUMENT IDENTIFICATION

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

DISTRIBUTION STATEMENT

Accession For
NTIS GRA&I
DDC TAB
Unannounced
Justification
By
Distribution/
Availability Codes
Dist | Avail and/or special
A | 23

DISTRIBUTION STAMP

DDC
RECEIVED
OCT 4 1979
D

DATE ACCESSIONED

DATE RECEIVED IN DDC

PHOTOGRAPH THIS SHEET

AND RETURN TO DDA-2

DISCLAIMER NOTICE

THIS DOCUMENT IS BEST QUALITY PRACTICABLE. THE COPY FURNISHED TO DDC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1 REPORT NUMBER USAFETAC/DS-79/040	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4 TITLE (and Subtitle) Revised Uniform Summary of Surface Weather Observations (RUSSWO)-Hunter AAF, Savannah, Georgia		5 TYPE OF REPORT & PERIOD COVERED Final rept. 6 PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)		8. CONTRACT OR GRANT NUMBER(s)
9 PERFORMING ORGANIZATION NAME AND ADDRESS USAFETAC/OL-A Air Force Environmental Technical Appl. Center Scott AFB IL 62225		10 PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11 CONTROLLING OFFICE NAME AND ADDRESS USAFETAC/CBD Air Weather Service (MAC) Scott AFB IL 62225		12 REPORT DATE 18 Nov 70 13 NUMBER OF PAGES p.
14 MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS (of this report) UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16 DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18 SUPPLEMENTARY NOTES

19 KEY WORDS (Continue on reverse side if necessary and identify by block number)

*RUSSWO	Daily temperature	Atmospheric pressure
Snowfall	Extreme snow depth	Extreme surface winds
Climatology	Sea-level pressure	Psychrometric summary
Surface Winds	Extreme temperature	Ceiling versus visibility
Relative humidity	*Climatological data	(over)

20 ABSTRACT (Continue on reverse side if necessary and identify by block number)

This report is a six-part statistical summary of surface weather observations for Hunter AAF, Savannah, Georgia

It contains the following parts: (A) Weather Conditions; Atmospheric Phenomena; (B) Precipitation, Snowfall and Snow Depth (daily amounts and extreme values); (C) Surface winds; (D) Ceiling Versus Visibility; Sky Cover; (E) Psychrometric Summaries (daily maximum and minimum temperatures, extreme maximum and minimum temperatures, psychrometric summary of wet-bulb temperature depression versus dry-bulb temperature, means and standard deviations of dry-bulb, wet-bulb (over)

DD FORM 1 JAN 73 1473

UNCLASSIFIED

19. Percentqge frequency of distribution tables
Dry-bulb temperature versus wet-bulb temperature
Cumulative percentage frequency of distribution tables

* Georgia * Hunter AAF, GA

20. and dew-point temperatures and relative humidity); and (F) Pressure Summary (means, standard, deviations, and observation counts of station pressure and sea-level pressure). Data in this report are presented in tabular form, in most cases in percentage frequency of occurrence or cumulative percentage frequency of occurrence tables.

DATA PROCESSING DIVISION
USAFETAC OL-1
AIR WEATHER SERVICE (MAC)

REVISED UNIFORM SUMMARY
OF SURFACE WEATHER OBSERVATIONS

HOURLY OBSERVATIONS

Hourly observations are defined as those record or record-special observations recorded at scheduled hourly intervals.

DAILY OBSERVATIONS

Daily observations are selected from all data recorded on reporting forms and combined into Summary of the Day observations. (Selected from record-special, local, summary of the day, remarks, etc.)

DESCRIPTION OF SUMMARIES

Preceding each section is a brief description of the data comprising each part of the Revised Uniform Summary of Surface Weather Observations and the manner of presentation. Tabulations are prepared from hourly and daily observations recorded by stations operated by the U. S. Services and some foreign stations using similar reporting practices.

Unless otherwise noted the following summaries are included for this station:

PART A WEATHER CONDITIONS
ATMOSPHERIC PHENOMENA

PART B PRECIPITATION
SNOWFALL
SNOW DEPTH

PART C SURFACE WINDS

PART D CEILING VERSUS VISIBILITY
SKYCOVER

PART E. DAILY MAX, MIN, & MEAN TEMP
EXTREME MAX & MIN TEMP
PSYCHROMETRIC-DRY VS WET BULB
MEAN & STD DEV -
(DRY BULB, WET BULB, & DEW POINT)
RELATIVE HUMIDITY

PART F STATION PRESSURE
SEA LEVEL PRESSURE

STANDARD 3-HOUR GROUPS

All summaries requiring diurnal variations are summarized in eight 3-hour periods corresponding to the following sets of hourly observations: 0000-0200, 0300-0500, 0600-0800, 0900-1100, 1200-1400, 1500-1700, 1800-2000, 2100-2300 hours local standard time.

MISSING HOUR GROUPS.

Summary sheets are omitted when stations maintaining limited observing schedules did not report certain three-hour periods for any particular month during the available period of record. Such missing sheets are listed below, and are applicable to all summaries prepared from hourly observations.

JANUARY_____	APRIL_____	JULY_____	OCTOBER_____
FEBRUARY_____	MAY_____	AUGUST_____	NOVEMBER_____
MARCH_____	JUNE_____	SEPTEMBER_____	DECEMBER_____

STATION NO ON SUMMARY.	STATION NAME.	LATITUDE:	LONGITUDE:	STATION ELEV. (FT.)	CALL SIGN:	WMO NUMBER:
13824	SAVANNAH GEORGIA/HUNTER AAF	N 32 01	W 81 08	52	SVN	

STATION LOCATION AND INSTRUMENTATION HISTORY

NUMBER OF LOCATION	GEOGRAPHICAL LOCATION & NAME	TYPE OF STATION	AT THIS LOCATION		LATITUDE	LONGITUDE	ELEVATION ABOVE MSL		OBS PER DAY
			FROM	TO			STATION (FT)	TYPE BAROMETER	
1	Hunter Fld, Savannah Georgia	WB	Jan 48	Sep 50	N 32 01	W 81 08	51	53	24
2	Hunter AFB, Savannah Georgia	AFB	Oct 50	Mar 53	N 32 01	W 81 08	39	41	24
3	No Change	AFB	Apr 53	Dec 56	No Change	No Change	41	50	24
4	No Change	AFB	Jan 57	Dec 63	No Change	No Change	52	70	24
5	No Change	AFB	Jan 64	Aug 67	No Change	No Change	52	70	24
6	No Change	AAF	Sep 67	May 70	No Change	No Change	No Change	No Chge	24

NUMBER OF LOCATION	DATE OF CHANGE	SURFACE WIND EQUIPMENT INFORMATION				REMARKS, ADDITIONAL EQUIPMENT, OR REASON FOR CHANGE
		LOCATION	TYPE OF TRANSMITTER	TYPE OF RECORDER	HT ABOVE GROUND	
1	Jan 48 to Sep50	Located on Control Tower	MARVIN (4 cup)	None	59 Ft.	
2	Oct 50 to Mar 53	Not Available	N/A	N/A	N/A	
3	Apr 53 to Feb 55	Located on top of Operations Bldg.	Selsyn	ML-144A	59 Ft.	
4	Mar 55 to Dec 56	Located on top of Weather Station.	No Change	No Change	75 Ft.	

USAF ETAC FORM APR 68 0-19 (OL-1)

CONTINUED ON REVERSE SIDE

NUMBER OF LOCATION	DATE OF CHANGE	SURFACE WIND EQUIPMENT INFORMATION				REMARKS, ADDITIONAL EQUIPMENT, OR REASON FOR CHANGE
		LOCATION	TYPE OF TRANSMITTER	TYPE OF RECORDER	HT ABOVE GROUND	
5	Jan 57 to Feb 62	Located 850 Ft. N of Center of Rnwy	AN/GMQ-11	No Chge	13 Ft.	
6	Mar 62 to Feb 67	Located 471 Ft. SSE of Ros.	No Chge	No Chge	15 Ft.	
7	Mar 67 to Feb 68	1. Located 300 Ft. N of Rnwy 09 at 500 Ft Marker.	No Chge	No Chge	25 Ft.	
		2. Located 300 Ft. N of Rnwy 27 at 500 Ft. Marker.	No Chge		15 Ft.	
8	Mar 68 to May 70	1. Located 500 Ft.from Center Line and 1500 Ft from end of Rnwy 09	No Chge	No Chge	20 Ft.	
		2. Located 1100 Ft from Center Line and 4800 Ft. from end of Rnwy 27.	No Chge	---	16 Ft	

MAC-8 AFD, III 66-8975

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE (MAC)
ASHEVILLE, NORTH CAROLINA

PART A WEATHER CONDITIONS

This summary is a percentage frequency occurrence of various atmospheric phenomena and obstructions to vision, derived from hourly observations, and is presented in two tables as follows:

1. By month and annual, all hours and years combined.

2. By month, all years combined, by standard 3-hour groups.

Occurrences of the various phenomena included in each category on the forms are listed below:

Thunderstorms - All reported occurrences of thunderstorm, tornado, and waterspout.

Rain and/or drizzle - All liquid precipitation, falling to the ground, not freezing.

Freezing rain and/or freezing drizzle (glaze) - Precipitation falling in liquid form, but freezing on contact with an unheated surface.

Snow and/or sleet - Included are snow, sleet, snow pellets, soft hail), snow grains, and ice crystals.

Hail - Occurrences of hail and small hail are included.

Percentage of observations with precipitation - Included in this category are the observations when one or more of the above phenomena occurred. Since more than one type of precipitation may be reported in the same observation, the sums of the individual categories may exceed the total columns.

Fog - Included are fog, ice fog, and ground fog.

Smoke and/or haze - Occurrences of smoke, haze, or combinations of smoke and haze are included.

Blowing snow - Occurrences of blowing snow (also drifting snow when reported from non-WBAN sources.)

Dust and/or sand - Included are blowing dust, blowing sand, and dust.

Blowing spray - This item if reported, is not shown in a separate category on this form but is included in the computation Percentage of Observations with Obstructions to Vision, below.

Percentage of observations with obstructions to vision - Included in this category are the observations when one or more of the above obstructions to vision occurred. Since more than one type of obstruction may be reported in the same observation, the sums of the individual categories may exceed the percentage total columns. Also, although precipitation may reduce visibility, it is not considered an obstruction to vision for purposes of this summary; therefore, the percentage total of obstructions to vision need not reflect the total observations with reduced visibility.

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN &/OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	ALL	.1	8.8	.2	.1		9.0	14.4	12.1		.0	22.3	17111
FEB		.2	9.6	.0	.2		9.7	13.1	11.2		.1	20.4	15896
MAR		.7	8.4		.0		8.5	10.8	8.5		.2	16.5	16653
APR		1.0	5.3		.0	.0	5.3	7.1	6.3		.1	10.8	13365
MAY		2.2	5.6				5.6	7.8	8.6		.0	13.2	16700
JUN		3.1	5.4				5.4	5.2	6.7		.1	9.5	15428
JUL		4.7	7.2				7.2	3.9	5.1			7.3	15926
AUG		3.5	5.9				5.9	6.8	9.7			13.0	15953
SEP		1.4	7.7				7.7	9.7	13.6		.0	18.4	15650
OCT		.3	6.1				6.1	12.2	14.2			20.6	16287
NOV		.2	4.8		.0		4.8	11.3	13.1			19.4	15833
DEC		.1	7.4	.0	.0		7.4	12.3	11.8			19.6	16346
TOTALS		1.5	6.9	.0	.0	.0	6.9	9.6	10.1		.0	15.9	192850

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	00-02	.2	9.1	.3	.0		9.4	16.0	10.8			22.9	2139
	03-05	.1	9.6	.2	.1		9.9	20.4	11.8			26.7	2139
	06-08	.1	10.3	.1	.2		10.5	24.6	19.3			34.8	2138
	09-11		9.1	.0	.0		9.1	15.7	21.3			31.8	2139
	12-14		7.9	.0	.1		8.0	8.2	8.9		.1	14.8	2139
	15-17		7.7	.2	.2		8.0	7.4	7.1		.0	12.4	2139
	18-20	.1	8.5	.3	.1		8.8	9.8	7.7			15.9	2139
	21-23	.1	8.0	.3			8.3	12.7	9.8			19.3	2139
TOTALS		.1	8.8	.2	.1		9.0	14.4	12.1		.0	22.3	17111

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5 (OL-1), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
FEB	00-02	.2	10.2		.3		10.5	15.2	10.3		.1	21.4	1950
	03-05	.2	10.5	.1	.6		11.0	19.4	10.3		.2	24.5	1950
	06-08	.5	10.5	.1	.2		10.8	24.7	18.1		.1	34.1	1949
	09-11	.1	10.5		.1		10.6	13.1	18.4			27.2	1949
	12-14	.2	8.8		.2		9.0	7.0	8.3		.2	13.5	1949
	15-17	.1	8.1				8.1	5.5	6.5		.1	10.7	1950
	18-20	.2	7.9		.1		7.9	8.3	8.5			14.6	1950
	21-23	.1	10.0	.1			10.0	11.2	9.1		.1	17.0	1949
TOTALS		.2	9.6	.0	.2		9.7	13.1	11.2		.1	20.4	15596

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5 (OL-1), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
MAR	00-02	.8	9.3		.1		9.6	11.5	8.3		.2	16.6	2048
	03-05	.7	8.1				8.1	17.3	10.1		.2	22.8	2050
	06-08	.5	6.1				8.1	23.6	17.3		.1	32.4	2102
	09-11	.2	7.2				7.2	8.9	10.6			17.2	2127
	12-14	.5	8.1		.1		8.2	5.6	4.8		.2	9.6	2126
	15-17	1.0	8.6		.0		8.6	5.3	5.3		.2	9.8	2102
	18-20	.7	8.9		.1		8.9	6.0	6.2		.4	11.8	2051
	21-23	.8	8.9				8.9	8.3	5.5		.1	12.0	2047
TOTALS		.7	8.4		.0		8.5	10.8	8.5		.2	16.5	16653

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5 (OL-1), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
APR	00-02	.6	5.1		.1		5.1	8.7	6.8			12.0	1889
	03-05	.4	4.9				4.9	16.4	8.3			19.4	1890
	06-08	.4	4.7				4.7	18.3	14.5			25.2	1940
	09-11	.8	5.2				5.2	3.7	6.9			9.0	1963
	12-14	1.1	5.7				5.7	1.5	2.9		.1	4.1	1964
	15-17	1.8	5.9				5.9	1.0	3.2		.3	4.0	1939
	18-20	1.9	6.3			.1	6.3	2.3	3.2			5.0	1890
	21-23	.7	4.4				4.4	4.9	4.2			7.7	1890
TOTALS		1.0	5.3		.0	.0	5.3	7.1	6.3		.1	10.8	15365

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
MAY	00-02	1.5	4.2				4.2	9.8	7.3			3.0	2045
	03-05	.6	4.3				4.3	20.7	12.2			24.5	2065
	06-08	.2	4.8				4.8	20.4	19.0			30.2	2127
	09-11	1.1	4.4				4.4	3.2	9.1			11.2	2126
	12-14	3.5	7.0				7.0	1.7	5.6			6.8	2127
	15-17	5.2	7.6				7.6	1.5	5.8		.0	7.1	2118
	18-20	3.8	7.1				7.1	2.0	4.9			6.3	2046
	21-23	1.9	5.3				5.3	2.7	5.1			6.6	2046
TOTALS		2.2	5.6				5.6	7.8	8.6		.0	13.2	16700

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5 (OL-1), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JUN	00-02	1.4	3.8				3.8	5.2	4.5		.2	7.9	1890
	03-05	.7	3.4				3.4	15.3	12.0			19.4	1916
	06-08	.7	3.0				3.0	15.1	18.1			25.3	1968
	09-11	.6	3.8				3.8	1.4	6.6			7.6	1968
	12-14	4.2	6.8				6.8	.5	3.0			3.5	1953
	15-17	9.0	9.1				9.1	.8	2.9		.1	3.5	1953
	18-20	5.6	8.8				8.8	1.7	3.4		.1	4.8	1890
	21-23	2.8	4.6				4.6	1.4	2.8			3.6	1890
TOTALS		3.1	5.4				5.4	5.2	6.7		.1	9.5	15428

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JUL	00-02	1.8	4.5				4.5	3.1	3.0			5.2	1952
	02-05	.9	3.4				3.4	10.1	8.1			13.9	1979
	06-08	.7	3.8				3.8	12.4	12.9			16.8	2031
	09-11	.8	4.9				4.9	1.6	5.9			6.9	2030
	12-14	6.9	8.4				8.4	.5	3.0			3.4	2016
	15-17	14.6	13.5				13.5	.8	2.2			3.0	2016
	18-20	8.3	11.2				11.2	1.3	2.6			3.4	1953
	21-23	3.4	7.5				7.5	1.5	2.8			3.6	1951
TOTALS		4.7	7.2				7.2	3.9	5.1			7.3	15928

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5 (OL-1), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
AUG	00-02	1.2	3.9				3.9	5.9	8.0			11.2	1953
	03-05	.7	3.0				3.0	15.6	15.8			22.9	1979
	06-08	.6	3.2				3.2	22.8	24.4			34.0	2033
	09-11	1.0	4.4				4.4	3.1	11.2			13.4	2034
	12-14	6.1	8.0				8.0	1.2	4.9			5.9	2022
	15-17	9.5	9.7				9.7	1.2	3.3			4.4	2022
	18-20	6.6	8.9				8.9	2.1	4.9			6.0	1957
	21-23	2.0	5.7				5.7	2.8	5.1			6.3	1953
TOTALS		3.5	5.9				5.9	6.8	9.7			13.0	15953

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5 (OL-1), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
SEP	00-02	1.1	6.8				6.8	10.8	12.8			18.3	1935
	03-05	.7	6.7				6.7	23.8	20.7			33.3	1959
	06-08	.3	6.4				6.4	29.4	29.6			43.1	1972
	09-11	.8	6.6				6.6	5.2	16.8			19.5	1973
	12-14	2.0	8.4				8.4	1.2	7.2			8.0	1968
	15-17	3.2	9.4				9.4	1.4	6.1		.1	7.0	1968
	18-20	1.8	9.8				9.8	2.4	7.7			9.0	1938
	21-23	1.3	7.1				7.1	3.0	7.6			9.2	1937
TOTALS		1.4	7.7				7.7	9.7	13.6		.0	18.4	15650

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
OCT	00-02	.1	6.0				6.0	17.1	15.6			24.6	2036
	03-05	.1	5.5				5.5	27.1	19.7			34.4	2036
	06-08	.1	5.5				5.5	29.8	29.8			43.2	2037
	09-11	.0	5.4				5.4	8.3	19.7			24.0	2037
	12-14	.4	5.5				5.5	2.7	7.2			8.7	2036
	15-17	.8	7.0				7.0	2.4	4.5			6.2	2034
	18-20	.8	7.5				7.5	3.4	6.6			9.3	2035
	21-23	.4	6.1				6.1	6.9	10.4			14.6	2036
TOTALS		.3	6.1				6.1	12.2	14.2			20.6	16287

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
NOV	00-02	.2	5.1		.1		5.1	15.6	13.6			23.5	1979
	03-05	.1	5.2				5.2	21.4	16.3			29.1	1979
	06-08	.2	4.4				4.4	26.6	26.8			39.6	1977
	09-11	.1	4.8				4.8	10.1	21.6			26.6	1980
	12-14	.2	5.5				5.5	2.7	5.8			7.3	1978
	15-17	.2	4.9				4.9	2.5	4.5			5.9	1980
	18-20	.1	4.1				4.1	3.8	7.5			9.7	1980
	21-23	.2	4.4		.1		4.5	7.6	8.5			13.5	1980
TOTALS		.2	4.8		.0		4.8	11.3	13.1			19.4	15833

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
DEC	00-02	.1	6.7		.1		6.7	15.1	11.3			21.6	2042
	03-05	.2	7.1		.1		7.2	18.0	11.3			24.0	2043
	06-08	.2	8.4		.1		8.4	21.4	19.5			32.5	2044
	09-11	.1	7.6				7.6	13.0	20.2			28.2	2043
	12-14	.0	7.2				7.2	5.5	8.5			12.5	2042
	15-17		7.7	.0			7.8	5.8	5.3			9.2	2044
	18-20		7.4	.0	.0		7.5	8.1	6.4			12.2	2045
	21-23	.3	6.9				6.9	11.7	9.1			16.9	2043
TOTALS		.1	7.4	.0	.0		7.4	12.3	11.5			19.6	16346

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5 (OL-1), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PART A ATMOSPHERIC PHENOMENA

This summary is a presentation of the percentage of days with occurrences of various atmospheric phenomena. These data are obtained from all recorded information on the reporting forms and combined into a daily observation.

The descriptions of the phenomena in the Weather Conditions Summary above also apply for the categories summarized in these tabulations. However, it should be noted that in this summary the columns headed "% OF OBS WITH PRECIP" and "% OF OBS WITH OBST TO VISION" show the percentage of days rather than percentage of observations. Since more than one type of precipitation or more than one type of obstruction may occur in the same daily observation, the sum of the values in the individual columns may not equal the total columns.

This presentation is by month with annual totals, and is prepared with all years combined.

NOTE: A day with rain and/or drizzle was not separately reported in WBAN data prior to January 1949. Therefore percentages in this column are restricted to the period January 1949 and later.

A day with dust and/or sand was punched and included in this summary only when visibility was less than 5/8 mile.

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

3

XXWEATHER CONDITIONSXX
XXXXXXXXXXXXXXXXXXXXXXXX
ATMOSPHERIC PHENOMENA

13824	SAVANNAH GEORGIA/HUNTER AAF	48-69	ALL
STATION	STATION NAME	YEARS	MONTH

PERCENTAGE OF DAYS WITH VARIOUS ATMOSPHERIC PHENOMENA FROM DAILY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	DAILY	2.2	38.7	.9	1.3	.1	37.2	46.1	51.7			65.2	681
FEB		3.4	46.7	.3	1.3		44.4	45.6	47.8			62.1	594
MAR		8.4	44.1		.8	.2	41.9	43.2	39.8			56.0	621
APR		12.2	34.4		.2	.2	32.7	36.8	36.0			48.3	600
MAY		22.3	40.6			.2	38.5	40.0	38.1			51.0	620
JUN		34.0	49.3			.7	47.0	35.3	36.3			45.7	600
JUL		44.1	63.4				60.3	29.4	30.0			38.6	619
AUG		37.5	51.6			.5	49.0	39.6	45.9			53.9	614
SEP		17.5	50.6				48.1	49.6	53.7			63.8	607
OCT		4.5	31.3				29.8	47.5	56.6			66.2	668
NOV		2.7	33.7		.6		32.2	43.5	55.2			64.3	630
DEC		1.7	36.9	.2	.6		35.3	42.2	48.5			61.6	651
TOTALS		15.9	43.4	.1	.4	.1	41.4	41.6	45.0			56.4	7485

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE (MAC)
ASHEVILLE, NORTH CAROLINA

PART B PRECIPITATION, SNOWFALL & SNOW DEPTH

This portion of the Uniform Summary presents in two sets of tables, the daily amounts and extreme values of the following:

PRECIPITATION	DERIVED FROM DAILY OBSERVATIONS
SNOWFALL*	DERIVED FROM DAILY OBSERVATIONS
SNOW DEPTH	DERIVED FROM DAILY OBSERVATIONS

1. The first table for each of the above presents the percentage frequency of various daily amounts, by month and annual, all years combined. The percentage of days with measurable amounts is also computed monthly and annually. Also shown for the precipitation and snowfall tables, are the monthly mean amounts, annual mean amounts (sum of monthly mean amounts), and the extreme monthly amounts (greatest and least). The latter statistics above are not presented for the snow depth summary since they would have limited use and may be misleading.

2. The second set of tables for each of the above presents the extreme daily amounts by individual year and month for the entire period of record available. Also provided are the means and standard deviations for each month and annual (all months). The extremes for a month are not printed nor used in computations if one or more observations are missing.

NOTE: Snow depth was recorded and punched at various hours during the period available from U. S. operated stations. The periods and hours used in the snow depth summary vary by service and period as follows:

Air Force Stations	From beginning of record thru 1945	Snow depth at 0800 LST
	Jan 46-May 57	Snow depth at 1230 GCT
	Jun 57-present	Snow depth at 1200 GCT
U. S. Navy and Weather Bureau Stations	From beginning of record thru Jun 52	Snow depth at 0030 GCT
	Jul 52-May 57	Snow depth at 1230 GCT
	Jun 57-present	Snow depth at 1200 GCT

* Hail was included in snowfall occurrence in the summary of the day observation prior to Jan 1956, [illegible]

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

PRECIPITATION
(FROM DAILY OBSERVATIONS)

13824 — STATION
SAVANNAH GEORGIA/HUNTER AAF — STATION NAME
48-69 — YEARS

24 HOUR AMOUNTS IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR	APR.	MAY	JUN.	JUL.	AUG	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
48	1.19	.61	2.70	4.06	1.22	.73	5.36	1.46	3.(0	.85	2.11	1.36	5.36
49	.18	.65	.55	1.40	1.27	1.88	.25	3.30	1.97	.34	.18	.33	3.30
50	.44	.22	.92	1.73	1.36	1.36		1.17	8.47		.82	.47	
51	.39	.34	1.40	.98	.48	.78	1.90	3.51	.95	2.32	1.58	.70	3.51
52	.33	1.12	.88	.75	3.15	1.49	1.30	1.06	1.73	1.94	.68	.98	3.15
53	.96	2.36	1.74	2.04	.36	1.46	3.87	2.94	3.47	1.19	.46	1.24	3.87
54	.24	.78	.74	1.30	1.27	1.50	.74	.33	4.76	.53	.59	1.72	4.76
55	1.67	.98	.15	1.19	1.01	1.68	1.61	1.66	2.45	.74	.57	.40	2.45
56	.44	1.13	.46	2.13	1.90	3.53	.65	3.76	1.22	1.50	.01	.37	3.76
57	.16	.87	3.10	.98	3.41	.97	3.91	1.79	1.34	1.68	1.12	.99	3.91
58	.91	1.07	1.34	2.10	2.04	2.17	1.61	.96	1.07	1.48	.19	.38	2.17
59	1.30	1.42	3.01	.58	1.06	1.50	2.24	2.40	4.79	2.63	.83	.84	4.79
60	.78	1.45	.81	2.26	1.09	.66	2.89	1.02	2.57	.68	.39	.47	2.89
61	.73	1.05	1.41	3.65	.75	1.61	1.23	2.31	1.42	.05	.08	.74	3.65
62	1.63	1.58	1.61	.79	.68	3.00	1.48	2.54	2.00	.78	.51	.56	3.00
63	1.69	1.60	.38	2.24	1.98	4.22	1.27	2.12	1.86	.11		1.01	
64	1.70	2.60	1.40	.92	1.04	2.66	4.71	5.87	1.72	3.46	1.17	3.89	5.87
65	.41	1.48	2.03	.78	1.08	1.91	2.53	1.60	1.97	.75	.42	1.93	2.53
66	2.15	1.61	1.66	.56	1.20	1.60	4.59	.95	.43	.44	.10	.05	4.59
67	2.93	.72								.89	.33	.81	
68	.50	.85	.66	.42	1.52	2.55	2.37	2.22	1.12	1.01	1.16	2.06	2.55
69	.89				3.57						3.52		
70													
71								6.03					
MEAN	.98	1.17	1.35	1.55	1.44	1.87	2.30	2.15	2.42	1.17	.70	1.06	3.07
S.D	.727	.595	.852	.996	.786	.933	1.467	1.282	1.839	.880	.523	.806	1.034
TOTAL OBS	682	594	620	600	620	600	589	620	600	620	600	651	7396

USAF ETAC FORM JUL 64 0-88 5 (OLI)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

PRECIPITATION
(FROM DAILY OBSERVATIONS)

13824 SAVANNAH GEORGIA/HUNTER AAF 68-69
STATION STATION NAME YEARS

24 HOUR AMOUNTS IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN.	FEB.	MAR.	APR	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
5[illegible]							1.04 30			1.59 28			PRECIP DAYS
6[illegible]											.80 27		PRECIP DAYS
67			.01 2	0	0	0	0	0	.48 16				PRECIP DAYS
MEAN													
S. D.													
TOTAL OBS.													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY AMOUN

PERCENTAGE FREQUENCY OF PRECIPITATION
(FROM DAILY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 68-69 (YEARS)

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS	MONTHLY AMOUNTS (INCHES)		
PRECIP	NONE	TRACE	01	02-05	.06-10	11-.25	26-.50	51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4					
SNOW-DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN	62.6	11.1	2.3	4.8	4.3	4.8	3.7	3.2	2.5	.1			6.1	26.2	682	2.93	8.52	.37
FEB	55.2	14.0	1.2	6.4	2.5	7.2	6.1	4.0	3.2	.2			7.4	30.3	594	3.31	7.01	.52
MAR	58.4	12.7	1.3	3.4	3.5	6.0	6.1	4.5	3.5	.9			8.5	28.9	620	4.15	9.70	.23
APR	66.7	9.8	2.3	2.7	4.0	3.2	3.5	3.3	2.2	.3			5.8	23.5	600	3.04	7.37	1.15
MAY	61.0	11.4	2.7	2.9	3.1	4.8	5.5	4.7	3.4	.3			8.4	27.4	620	3.93	11.93	.42
JUN	52.7	12.3	2.0	3.7	4.3	8.0	5.0	6.3	4.3	1.0			11.8	35.0	600	5.56	17.33	1.89
JUL	40.7	15.1	2.5	6.3	5.9	6.6	8.0	6.0	6.6	1.4	.2		14.8	44.1	589	7.87	18.49	1.33
AUG	49.4	13.9	2.6	4.2	3.4	8.4	5.2	5.8	6.0	1.1	.2		13.1	36.6	620	6.84	13.97	1.20
SEP	50.5	13.7	2.2	5.3	4.8	6.7	5.7	5.2	4.7	1.2	.2		11.1	35.8	600	6.08	17.30	2.25
OCT	69.7	11.9	1.5	2.3	2.9	3.2	2.9	3.2	2.1	.3			5.6	18.4	620	2.61	9.52	.05
NOV	66.2	12.2	2.5	4.5	2.2	3.8	3.3	2.2	.6				3.0	19.7	600	1.48	4.45	.01
DEC	64.6	11.2	3.4	3.5	2.6	4.9	4.5	3.5	1.4	.2			5.1	24.0	651	2.48	5.64	.50
ANNUAL	58.3	12.5	2.2	4.2	3.6	5.6	5.0	4.4	3.4	.5	.0			29.2	7396	50.29		

1210 WS FORM JUL 64 0-15-5 (Def 50) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF SNOWFALL
(FROM DAILY OBSERVATIONS)

13824 — STATION
SAVANNAH GEORGIA/HUNTER AAF — STATION NAME
48-69 — YEARS

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS	MONTHLY AMOUNTS (INCHES)		
PRECIP	NONE	TRACE	01	.02-.05	.06-.10	.11-.25	.26-.50	.51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	13.5-25.4	25.5-50.4	OVER 50.4					
SNOW-DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN	98.7	1.2	.1											.1	682	TRACE	.1	.0
FEB	98.5	1.3				.2								.2	594	.1	~~3.6~~	.0
MAR	99.2	.8													620	TRACE	TRACE	.0
APR	99.8	.2													600	TRACE	TRACE	.0
MAY	100.0														620	.0	.0	.0
JUN	100.0														600	.0	.0	.0
JUL	100.0														620	.0	.0	.0
AUG	100.0														620	.0	.0	.0
SEP	100.0														600	.0	.0	.0
OCT	100.0														620	.0	.0	.0
NOV	99.3	.7													600	TRACE	TRACE	.0
DEC	99.4	.6													651	TRACE	TRACE	.0
ANNUAL	99.6	.4	.0			.0								.0	7427	.1		

3

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOWFALL
(FROM DAILY OBSERVATIONS)

13824 SAVANNAH GEORGIA/HUNTER AAF 48-69
STATION STATION NAME YEARS

24 HOUR AMOUNTS IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
47	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
48	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
49	.0	.0	.0	.0	.0	.0	.0	.0	.0		TRACE	.0	
50	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
51	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	TRACE	TRACE
52	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
53	.0	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
54	TRACE	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	TRACE
55	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
56	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
57	TRACE	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	TRACE	TRACE
58	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
59	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
60	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
61	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
62	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	TRACE
63	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0		.0	
64	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
65	TRACE	.0	TRACE	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
66	.1	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.1
67	.0	.0								.0	.0	.0	
68	.0	3.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	3.0
69	.0												
70													
71													
72		3.6											
73													
MEAN	.00	.14	TRACE	TRACE	.00	.00	.00	.00	.00	.00	TRACE	TRACE	.17
S.D.	.020	.655	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.706
TOTAL OBS	682	594	620	600	620	600	620	620	600	620	600	651	7427

USAF ETAC FORM JUL 64 0-88-5 (OLI)

3

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOWFALL
(FROM DAILY OBSERVATIONS)

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS

24 HOUR AMOUNTS IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
57										.0			SNOFALL
										28			DAYS
61											.0		SNOFALL
											27		DAYS
67			.0						.0				SNOFALL
			1	0	0	0	0	0	16				DAYS
MEAN													
S D.													
TOTAL OBS.													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF SNOW DEPTH
(FROM DAILY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS)

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS.	MONTHLY AMOUNTS (INCHES)		
PRECIP	NONE	TRACE	01	02-.05	06-.10	11-.25	26-.50	51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4					
SNOW DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN	100.0														687			
FEB	99.7	.2			.2									.2	594			
MAR	100.0														620			
APR	100.0														600			
MAY	100.0														620			
JUN	100.0														600			
JUL	100.0														620			
AUG	100.0														620			
SEP	100.0						†								600			
OCT	100.0														620			
NOV	100.0														600			
DEC	100.0														651			
ANNUAL	100.0	.0			.0									.0	7427			

1210 WS FORM JUL 64 0-15-5 (Det 50) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOW DEPTH
(FROM DAILY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 40-69 (YEARS)

DAILY SNOW DEPTH IN INCHES

YEAR \ MONTH	JAN	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
49	0	0	0	0	0	0	0	0	0	0	0	0	0
50	0	0	0	0	0	0	0	0	0	0	0	0	0
51	0	0	0	0	0	0	0	0	0		0	0	
52	0	0	0	0	0	0	0	0	0	0	0	0	0
53	0	0	0	0	0	0	0	0	0	0	0	0	0
54	0	0	0	0	0	0	0	0	0	0	0	0	0
55	0	0	0	0	0	0	0	0	0	0	0	0	0
56	0	0	0	0	0	0	0	0	0	0	0	0	0
57	0	0	0	0	0	0	0	0	0	0	0	0	0
58	0	TRACE	0	0	0	0	0	0	0	0	0	0	TRACE
59	0	0	0	0	0	0	0	0	0	0	0	0	0
60	0	0	0	0	0	0	0	0	0	0	0	0	0
61	0	0	0	0	0	0	0	0	0	0	0	0	0
62	0	0	0	0	0	0	0	0	0	0	0	0	0
63	0	0	0	0	0	0	0	0	0	0		0	
64	0	0	0	0	0	0	0	0	0	0	0	0	0
65	0	0	0	0	0	0	0	0	0	0	0	0	0
66	0	0	0	0	0	0	0	0	0	0	0	0	0
67	0	0								0	0	0	
68	0	3	0	0	0	0	0	0	0	0	0	0	3
69	0												
MEAN	.0	.1	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.2
S D.	.000	.655	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.707
TOTAL OBS.	682	594	620	600	620	600	620	620	600	620	600	691	7427

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOW DEPTH
(FROM DAILY OBSERVATIONS)

13024 SAVANNAH GEORGIA/HUNTER AAF 48-69
STATION STATION NAME YEARS

DAILY SNOW DEPTH IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN.	FEB	MAR	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
5[illegible]										0 28			SNO DPTH DAYS
5[illegible]											0 27		SNO DPTH DAYS
47			0 27	0 25	0 27	0 26	0 26	0 27	0 28				SNO DPTH DAYS
MEAN													
S. D.													
TOTAL OBS													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE (MAC)
ASHEVILLE, NORTH CAROLINA

PART C SURFACE WINDS

Presented in this part are various tabulations of surface winds as follows:

1. Extreme Values - Peak Gusts: Derived from daily observations and presented by individual year and month for the entire period of record available. Speeds are presented in knots, while directions are given in 16 compass points from the beginning of record through 1963, and in tens of degrees starting in January 1964. When 90% or more of the daily observations of peak gust wind data are available for a month, the extreme is selected and printed. These values are then used to compute means and standard deviations for the entire period. Every month of a year must have valid observations present before the ALL MONTHS value is selected for that year. Means and standard deviations are computed when four or more values are present for any column. A supplementary list of Peak Gusts by year-month with < 90% observations reported is also provided.

   NOTE: According to Circular N specifications, "peak gust data are recorded only at stations with continuous instantaneous wind-speed recorders."

2. Bivariate percentage frequency tabulations: Derived from hourly observations, these tabulations are a percentage frequency of wind directions to 16 compass points and calm by wind speeds (knots) in increments of Beaufort classifications. Percentages are shown by both direction and speed, and in addition the mean wind speed for each direction.

   A separate category is provided on the form for variable winds, which are reported in some data sources. In these data where light and variable winds are reported with no directions but with speeds given, the speeds will be summarized in the appropriate groups opposite the column headed VARBL.

   a. Three tables are prepared for all surface winds included, and for all years combined as follows:

      (1) Annual - all hours combined

      (2) By month - all hours combined

      (3) By month - by standard 3-hour groups

   b. A separate annual table is also presented for surface winds meeting the following ceiling and visibility conditions: INSTRUMENT CLASS: Ceiling 200 through 1400 feet inclusive with visibility equal to or greater than 1/2 mile, and/or visibility 1/2 through 2-1/2 miles inclusive with ceiling equal to or greater than 200 feet.

3

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SURFACE WINDS
(FROM DAILY OBSERVATIONS)

13924 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 51-69 YEARS

DAILY PEAK GUSTS IN KNOTS

YEAR \ MONTH	JAN	FEB	MAR.	APR	MAY	JUN	JUL	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
48													
49													
50													
51									NW 39	ENE 30	W 34	30	
52	NW 38	W 34	SW 44	SE 30	NW 31	SSE 21	SSE 34	NW 32	N 26	NNE 36	WSW 26	W 35	SW 44
53	WNW 38	SE 46	WSW 38	SSE 42	SW 32	ENE 39	E 35	ENE 31	NNE 31	NE 30	NNE 32	W 36	ENE 51
54	WNW 43	NW 36	NW 33	E 36	SSW 36	S 31	NNW 30	NE 46	N 33	WNW 40	W 39	ENE 40	NE 46
55	NW 51	W 39	WSW 39	W 50	SSW 39	ENE 27	WSW 26	NNE 35	ENE 27	SSW 31	W 26	WNW 33	NW 51
56	W 29	NW 38	WSW 46	W 41	ENE 32	NNW 35	WNW 44	SE 24	SSE 29	NNE 31	NNW 28	W 35	WSW 46
57	W 32	W 27	NNW 34	S 28	SE 39	NNE 25	NW 32	NNW 22	SSE 20	NNE 17	S 30	NW 28	SE 39
58	W 29	SE 30	S 21	SSE 28	S 36	N 30	NW 39	E 20	NW 23	NE 21	W 23	SSW 22	NW 39
59	W 30	W 30	S 32	N 31	SSW 30	NNW 33	W 28	NW 24	NW 50	NE 31	NW 27	W 28	NW 50
60	WSW 26	WSW 42	NW 34	W 32	NNW 20	ENE 20	NW 25	N 18	N 28	SE 15	NW 18	NNW 25	WSW 42
61	WNW 30	W 40	W 37	W 50	W 26	W 33	NNE 30	S 33					
62	WSW 32	SW 27	S 39	W 33	NNE 32	W 34		SSE 40	N 30	NNW 22	SW 36	W 34	
63	NW 48	WSW 33	NNW 28	W 26	WSW 30	N 30	NNW 40	SW 22	S 28	NW 26	W 43	W 30	NW 48
64	W 33	N 41	W 48	ESE 32	S 41	WSW 25	NW 28		ESE 40	NNW 35			
65					N 31		SSW 39	NE 35	W 22	SSW 30	NNW 34	NNE 27	
66	NW 41	W 28	W 38	NNW 33	NNW 37	E 39	NNE 40	W 34		SW 24	W 33	W 28	
67	W 26	NW 26								WNW 36	WSW 43	W 43	
68	WSW 28	NNW 41	NNW 34	ENE 33	E 30	W 51	20/ 38	27/ 30	7/ 32	12/ 46	28/ 34	28/ 34	77/ 51
69	31/ 29												
70							26/ 50						
MEAN	34.1	35.4	36.3	35.0	33.3	31.7	33.9	31.3	31.1	29.6	31.6	31.8	46.1
S D	7.549	6.260	6.961	7.493	4.644	7.916	5.927	9.765	7.216	8.337	6.838	5.520	4.614
TOTAL OBS.	525	447	461	450	494	448	462	460	445	522	477	493	5684

USAF ETAC FORM JUL 64 0-88-5 (OL1)

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

3

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SURFACE WINDS
(FROM DAILY OBSERVATIONS)

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 51-69 YEARS

DAILY PEAK GUSTS IN KNOTS
/BASED ON LESS THAN 90% OBSERVATIONS FOR MONTH/

YEAR \ MONTH	JAN.	FEB	MAR.	APR.	MAY	JUN	JUL.	AUG.	SEP	OCT.	NOV.	DEC.	ALL MONTHS
[illegible]	0	0	0	0	0	0	0	0	0	0	0	5	WINDS DAYS
[illegible]	0	0	0	0	0	0	0	0	0	0	0	0	WINDS DAYS
5[illegible]	0	0	0	0	0	0	0	0	0	0	0	0	WINDS DAYS
51	0	0	0	0	0	0	0	NE 35 26					WINDS DAYS
61									ENE 32 19	N 25 13	W 30 17	NW 26 19	WINDS DAYS
6[illegible]							W 27 22						WINDS DAYS
64								W 22 27			E 25 19	NW 24 21	WINDS DAYS
65	NW 31 20	N 53 23	SW 42 26	S 33 26		W 26 [illegible]4							WINDS DAYS
66									W 32 24				WINDS DAYS
67			E 12 2	0	0	0	0	0	E 10 16				WINDS DAYS
MEAN													
S D.													
TOTAL OBS													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) ALL (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) D.R.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	1.9	1.6	.8	.9							5.3	6.1
NNE	1.2	2.0	2.0	.5	.1	.0	.0					6.0	6.9
NE	1.2	1.9	2.0	.8	.1	.0	.0					6.0	7.0
ENE	.8	1.5	1.8	.7	.1	.0	.0	.0				4.9	7.3
E	1.2	2.0	2.1	.6	.1	.0	.0	.0				6.1	6.9
ESE	.7	1.2	1.2	.3	.0	.0	.0					3.5	6.5
SE	.9	1.3	1.2	.4	.0	.0	.0	.0				3.7	6.3
SSE	.8	1.6	2.1	.8	.1	.0	.0					5.4	7.5
S	1.6	2.6	2.6	.8	.1	.0	.0					7.7	6.7
SSW	1.0	1.7	1.5	.5	.1	.0	.0	.0				4.9	6.7
SW	1.3	1.9	1.6	.5	.1	.0	.0					5.3	6.4
WSW	1.1	1.8	1.6	.6	.1	.0	.0	.0				5.3	6.9
W	1.7	2.7	2.3	1.2	.3	.1	.0	.0				8.2	7.3
WNW	.8	1.4	1.6	1.1	.3	.1	.0	.0				5.2	8.5
NW	.8	1.2	1.2	.6	.1	.0	.0		.0			3.9	7.3
NNW	.7	1.1	.9	.3	.0	.0	.0			.0		3.0	6.5
VARBL													
CALM												15.6	
	17.0	27.6	27.2	10.8	1.5	.3	.0	.0	.0	.0		100.0	5.9

TOTAL NUMBER OF OBSERVATIONS 142845

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	1.9	1.9	.5	.0							5.6	6.3
NNE	.9	1.9	1.8	1.0	.0	.0						5.7	7.2
NE	1.2	2.3	2.1	.9	.1							6.5	6.8
ENE	.8	1.7	1.9	.5	.0	.0						4.9	6.9
E	1.2	1.8	1.2	.2	.0	.0						4.5	5.8
ESE	.7	.8	.7	.1								2.4	5.6
SE	.8	.9	.8	.3								2.8	6.0
SSE	.6	1.1	1.3	.7	.1	.0						3.8	7.6
S	1.3	2.2	2.2	.8	.1	.0						6.5	6.8
SSW	.8	1.4	1.5	.7	.1	.0						4.6	7.2
SW	.9	1.5	1.4	.5	.1	.0						4.5	6.7
WSW	1.0	1.4	1.6	.9	.1	.0						5.0	7.4
W	1.9	3.3	2.8	1.8	.4	.1						10.3	7.7
WNW	.7	1.8	3.0	2.0	.5	.2	.0					8.3	9.3
NW	.8	1.7	2.1	1.1	.2	.1	.0					5.9	8.3
NNW	.8	1.2	1.5	.5	.0	.0						4.0	5.8
VARBL													
CALM												14.9	
	15.6	27.0	27.8	12.5	1.8	.5	.0					100.0	6.2

TOTAL NUMBER OF OBSERVATIONS 17111

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13024 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.6	1.4	.5	.0							4.5	6.4
NNE	.7	1.8	2.1	.9	.1							5.6	7.6
NE	.8	1.9	2.6	1.1	.2	.0						6.6	7.9
ENE	.8	1.5	2.4	1.1	.1	.0						6.0	7.9
E	1.1	1.8	2.0	.6	.0							5.5	6.7
ESE	.6	.8	.9	.2								2.5	6.2
SE	.7	.8	.6	.2	.0							2.3	6.0
SSE	.8	1.3	2.1	.8	.1	.0						5.2	7.7
S	1.4	2.3	2.8	1.4	.2	.0						8.0	7.6
SSW	.5	1.4	1.8	1.0	.1	.0						4.9	6.2
SW	.9	1.4	1.4	.7	.1		.0					4.5	7.2
WSW	1.1	1.4	1.7	.9	.2	.1	.0					5.5	7.8
W	1.8	2.8	3.2	2.0	.7	.3	.1	.0				10.8	8.7
WNW	.6	1.5	2.5	2.3	.6	.2	.1					7.9	10.1
NW	.7	1.5	1.9	1.2	.2	.0						5.6	8.1
NNW	.5	1.2	1.3	.6	.1	.0						3.6	7.7
VARBL													
CALM												10.9	
	13.7	25.2	30.9	15.7	2.6	.7	.1	.0				100.0	7.0

TOTAL NUMBER OF OBSERVATIONS 15595

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-70 (YEARS) | MAR (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.0	.9	.4	.0							3.1	6.6
NNE	.5	1.0	1.3	.6	.0							3.4	7.5
NE	.8	1.2	1.7	.9	.1	.0						4.7	7.7
ENE	.7	1.2	1.4	.9	.2	.0						4.4	8.0
E	1.0	2.0	2.2	1.0	.0							6.2	7.3
ESE	.7	1.1	1.2	.6	.0							3.7	7.1
SE	.7	1.1	1.2	.3	.0							3.4	6.5
SSE	.8	1.9	2.1	1.1	.3	.0	.0					6.3	8.3
S	1.5	2.5	3.5	1.9	.2	.1						9.7	7.9
SSW	.9	1.4	1.8	1.1	.1	.1						5.5	8.0
SW	.9	1.3	1.6	.8	.2	.1	.0					4.8	7.8
WSW	.9	1.4	1.8	1.1	.3	.1	.0					5.6	8.7
W	1.6	2.4	2.7	2.5	.9	.2	.0					10.4	9.2
WNW	.8	1.6	2.4	2.3	.7	.2	.0					8.0	10.0
NW	.8	1.3	1.9	1.2	.3	.0	.0					5.7	8.7
NNW	.6	1.1	1.2	.5	.1	.0						3.5	7.6
VARBL													
CALM												11.7	
	13.9	23.4	29.0	17.4	3.6	.2	.1					100.0	7.2

TOTAL NUMBER OF OBSERVATIONS 16652

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.9	1.3	.4	.0							3.2	7.1
NNE	.4	.7	.9	.3	.0	.0						2.3	7.2
NE	.6	.9	.8	.5	.0							2.8	7.1
ENE	.6	.9	1.6	.9	.2	.0						4.3	8.5
E	1.1	1.8	2.4	1.2	.2	.0						6.7	7.7
ESE	.8	1.5	1.4	.5	.0							4.3	6.7
SE	.9	1.7	1.8	.7	.0							5.2	7.0
SSE	.9	2.1	3.6	1.8	.1	.0	.0					8.8	8.2
S	1.5	3.4	4.4	1.6	.2	.0						11.2	7.6
SSW	.9	1.6	2.1	.9	.1	.0		.0				5.8	7.5
SW	1.3	2.0	2.1	.9	.2	.0						6.6	7.2
WSW	1.0	1.7	2.3	1.2	.2	.0	.0	.0				6.5	8.0
W	1.2	2.3	2.4	2.0	.5	.1						8.5	8.7
WNW	.6	1.1	1.7	1.4	.4	.1	.0					5.3	9.5
NW		1.0	1.0	.6	.2	.0	.0					3.4	8.1
NNW		.8	1.0	.4	.1	.0						2.6	7.6
VARBL													
CALM												12.6	
	13.3	24.6	31.1	15.2	2.6	.5	.0	.0				100.0	6.8

TOTAL NUMBER OF OBSERVATIONS 15364

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.4	1.3	.2	.0							3.8	6.0
NNE	.9	1.4	1.2	.3	.1							3.9	6.3
NE	1.0	1.4	.9	.3	.0							3.6	6.0
ENE	.7	1.3	1.5	.7	.1	.0						4.2	7.3
E	1.3	2.2	3.1	1.4	.1	.0						8.1	7.5
ESE	.7	1.6	1.9	.7	.0							4.9	7.1
SE	1.0	2.0	2.2	.6								5.7	6.7
SSE	1.0	2.3	3.6	1.1	.0							8.0	7.4
S	2.0	3.3	3.5	.8	.0							9.6	6.4
SSW	1.3	2.0	1.8	.5	.0		.0					5.5	6.3
SW	1.6	2.4	1.9	.7	.1	.0	.0					6.8	6.6
WSW	1.1	2.0	1.6	.5	.1	.0						5.4	6.6
W	1.3	2.3	2.3	.8	.1		.0					6.7	6.9
WNW	.7	1.3	1.2	.4	.1	.0	.0					3.7	7.1
NW	.8	1.1	1.0	.4	.1	.0	.0					3.4	6.7
NNW	.5	1.1	.6	.2	.0							2.4	6.0
VARBL													
CALM												14.2	
	16.8	28.8	29.4	9.8	.8	.1	.0					100.0	5.8

TOTAL NUMBER OF OBSERVATIONS 16697

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 46-69 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.5	.8	.3	.1							3.9	5.7
NNE	1.1	1.6	1.2	.4	.0	.0						4.3	6.1
NE	1.1	1.2	1.2	.3	.0	.0						3.8	6.1
ENE	.8	1.0	1.3	.6	.1	.0						3.7	7.7
E	1.1	1.9	2.5	.9	.1	.0						6.5	7.2
ESE	.7	1.5	2.1	.5	.1	.0						4.8	7.2
SE	1.1	1.9	2.0	.6	.0							5.7	6.7
SSE	1.1	2.1	3.1	1.2	.1							7.6	7.4
S	2.2	3.4	3.0	.6	.0							9.2	5.0
SSW	1.5	2.4	2.1	.4	.0							6.4	6.1
SW	2.0	2.5	2.4	.7	.1							7.7	6.2
WSW	1.2	2.4	2.2	.7	.1			.0				6.5	6.7
W	1.6	2.8	2.0	.6	.0	.0						7.1	6.1
WNW	.7	1.2	1.2	.5	.0							3.6	6.8
NW	.8	.9	.8	.3	.0	.0						2.8	6.2
NNW	.5	.9	.7	.1	.0							2.2	5.7
VARBL													
CALM												14.3	
	18.5	29.2	28.6	8.6	.7	.1		.0				100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 15426

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.3	.7	.1	.0							3.2	5.0
NNE	1.0	1.1	.7	.2			.0					3.1	5.4
NE	1.0	.9	.9	.2								3.1	5.8
ENE	.6	.8	.9	.3	.1	.0						2.6	6.8
E	1.0	1.4	1.6	.6	.1	.0						5.0	7.1
ESE	.8	1.3	1.2	.4	.0							3.7	6.4
SE	1.1	1.6	1.7	.5	.0							4.9	6.4
SSE	.9	1.9	3.1	1.2	.1							7.2	7.7
S	2.5	4.1	3.3	.6	.0	.0						10.5	6.0
SSW	1.7	3.3	2.6	.5	.0							8.1	6.0
SW	2.1	3.9	2.8	.8	.1	.0						9.7	6.2
WSW	1.7	3.6	2.7	.6	.0	.0						8.6	6.1
W	1.8	3.7	2.4	.4	.0	.0						8.4	5.9
WNW	.6	1.0	.8	.1	.0	.0						2.6	5.8
NW	.5	.7	.4	.1	.0							1.7	5.5
NNW	.5	.6	.3	.1								1.4	5.3
VARBL													
CALM												16.3	
	18.6	31.3	26.4	6.6	.4	.1	.0					100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 15927

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.6	2.0	1.0	.2	.0							4.9	5.2
NNE	1.4	2.1	1.5	.3	.0							5.3	5.7
NE	1.3	1.6	1.6	.5	.1	.0						5.1	6.5
ENE	.7	1.4	1.4	.6	.1	.0						4.2	7.2
E	1.3	1.8	2.3	.8	.0	.0	.0	.0				6.0	6.8
ESE	.8	1.3	1.3	.3	.0	.0	.0					3.7	6.6
SE	1.2	1.5	1.4	.3	.0	.0	.0	.0				4.5	6.3
SSE	1.0	1.8	2.1	.9	.1	.0						5.9	7.2
S	2.5	3.5	2.6	.4	.0	.0	.0					9.1	5.7
SSW	1.7	2.3	1.4	.2		.0						5.7	5.4
SW	2.3	2.9	1.6	.3	.0	.0						7.1	5.3
WSW	1.6	2.5	1.6	.2	.0	.0						6.0	5.5
W	1.9	2.9	1.5	.3	.0							6.6	5.3
WNW	.9	1.0	.7	.2	.0		.0					2.8	5.7
NW	.8	.7	.4	.2	.0	.0						2.1	5.7
NNW	.8	.7	.5	.1	.1					.0		2.2	5.6
VARBL													
CALM												18.6	
	21.8	29.8	23.0	6.0	.5	.1	.0	.0		.0		100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 15953

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	2.7	2.1	.7	.0							7.5	5.9
NNE	2.3	4.0	3.5	1.6	.3	.1	.0					11.8	7.0
NE	2.0	3.5	3.4	1.5	.1	.0	.0					10.5	7.0
ENE	1.2	2.5	3.2	1.0	.1	.0						8.1	7.2
E	1.6	3.0	3.2	1.2	.1	.0						9.2	7.1
ESE	1.0	1.8	1.5	.3	.1	.0						4.6	6.3
SE	1.0	1.3	1.1	.3								3.8	5.8
SSE	.7	1.3	1.3	.4	.0							3.8	6.7
S	1.1	1.5	1.0	.1	.0							3.8	5.4
SSW	.9	1.0	.6	.1	.0							2.6	5.0
SW	1.0	1.2	.6	.1	.0							3.0	5.3
WSW	.8	1.1	.5	.1	.0	.0						2.5	5.4
W	1.2	1.7	1.0	.1		.0	.0					4.1	5.3
WNW	.7	.9	.6	.1	.0	.0						2.3	5.8
NW	.7	.7	.5	.1		.0	.0		.0			1.9	5.7
NNW	.9	.8	.5	.1		.0	.0					2.4	5.3
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	18.2	
	19.1	29.1	24.7	7.8	.8	.2	.0		.0			100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 15650

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	3.3	3.1	.9	.1							9.4	6.4
NNE	2.0	3.6	4.7	2.1	.1	.0						12.6	7.4
NE	2.0	3.7	3.8	2.2	.4	.0						12.0	7.6
ENE	1.0	2.6	2.5	1.2	.1	.0	.0	.0				[illegible]	[illegible]
E	1.2	2.2	2.5	.9	.0	.0						7.0	6.9
ESE	.7	1.1	.8	.3	.0		.0					2.9	6.2
SE	.8	.8	.5	.1	.0	.0						2.3	5.4
SSE	.5	.7	.7	.2	.1	.0						2.1	6.5
S	.9	1.1	.6	.1	.0							2.8	5.4
SSW	.5	.7	.5	.1	.0							1.8	5.8
SW	.7	.8	.4	.1	.0							2.0	5.2
WSW	.8	.9	.7	.3	.0							2.7	6.0
W	1.6	1.9	1.4	.5	.0							5.3	5.9
WNW	.8	1.2	1.0	.3	.0							3.3	6.2
NW	1.0	1.4	1.1	.3	.0							3.8	6.0
NNW	.9	1.4	1.3	.5	.0	.0						4.1	6.7
VARBL													
CALM												18.3	
	17.3	27.5	25.7	10.1	.9	.1	.0	.0				100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 16287

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-69 (YEARS) | NOV (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	3.4	2.3	.5	.0							8.6	5.8
NNE	1.3	2.7	2.4	.6	.0							7.3	6.3
NE	1.1	2.1	2.1	.5	.0							5.9	6.4
ENE	.9	1.8	1.7	.4	.0							4.8	6.3
E	1.3	1.8	1.6	.3	.0							5.0	5.9
ESE	.7	1.0	.6	.0	.0							2.4	5.1
SE	.8	.8	.6	.1								2.3	5.3
SSE	.7	1.1	.9	.5	.0							3.1	6.6
S	1.0	1.9	1.7	.6	.1							5.2	6.8
SSW	.8	1.3	1.4	.6	.1	.0						4.2	7.2
SW	.8	1.2	1.3	.4	.1							3.8	6.6
WSW	1.0	1.4	1.3	.6	.2	.1						4.4	7.2
W	2.0	3.0	2.4	1.4	.3	.1	.0	.0				9.2	7.4
WNW	.9	1.5	2.1	1.6	.3	.1	.0	.0				6.6	8.8
NW	.9	1.6	1.6	.7	.1	.0						4.8	7.1
NNW	1.1	1.6	1.1	.3	.0	.0						4.1	5.9
VARBL													
CALM												18.3	
	17.5	28.2	25.2	9.1	1.3	.3	.1	.0				100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 15835

USAFETAC FORM 0-8 5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13024 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) '48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	2.2	2.0	.7	.1							6.3	6.7
NNE	1.2	2.0	2.4	1.2	.2	.0						7.0	7.6
NE	1.3	2.3	2.4	.9	.1	.0						7.0	6.9
ENE	.9	1.8	1.4	.6	.0		.0					4.6	6.6
E	1.1	1.7	1.0	.2	.0							4.1	5.4
ESE	.7	.8	.5	.0								2.1	5.0
SE	.6	.7	.5	.2	.0							2.0	5.7
SSE	.9	1.3	1.1	.3	.0	.0						3.6	6.0
S	1.2	2.1	2.4	.6	.1	.0						6.3	6.8
SSW	.7	1.1	1.1	.4	.0	.0						3.3	6.9
SW	.9	1.2	1.1	.3	.0							3.5	6.0
WSW	1.1	1.6	1.2	.5	.0	.0						4.4	6.3
W	2.5	3.4	2.9	1.3	.3	.0	.0	.0				10.7	7.0
WNW	1.0	2.1	2.3	1.6	.3	.0						7.4	8.2
NW	.9	1.7	1.6	.8	.1	.0						5.1	7.1
NNW	.5	1.4	1.1	.3	.1	.0						3.7	6.3
VARBL													
CALM												18.8	
	17.2	27.3	25.0	10.1	1.4	.2	.0	.0				100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 16348

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	1.4	1.6	.4								4.9	6.0
NNE	1.3	2.0	2.0	.6								5.8	6.4
NE	1.7	3.3	1.5	.5								7.1	5.7
ENE	.6	1.8	.9	.5								3.8	6.3
E	1.6	.9	.4	.2								3.2	4.6
ESE	.4	.5	.3									1.2	5.0
SE	.4	.4	.5									1.3	5.6
SSE	.6	.6	1.1	.0								2.3	6.3
S	1.6	2.0	1.8	.8	.1	.0						6.4	6.7
SSW	1.7	1.6	1.8	.6								5.7	6.1
SW	1.4	2.6	1.1	.2								5.2	5.1
WSW	1.2	1.6	.8	.7	.1							4.3	6.5
W	2.1	3.6	1.8	.9	.1	.0						8.5	6.2
WNW	.7	1.5	2.2	1.3	.3	.1						6.1	8.7
NW	.7	2.4	2.7	.7	.2	.0						6.8	7.6
NNW	1.1	1.4	1.4	.4								4.3	6.3
VARBL													
CALM												23.2	
	18.5	27.4	22.0	7.8	.8	.2						100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	2.2	2.2	.4								6.8	5.8
NNE	1.4	2.2	2.1	.6								6.3	6.3
NE	1.3	2.5	1.8	1.1								6.6	6.6
ENE	1.1	1.5	1.3	.2								4.1	5.7
E	.9	1.1	.3	.1	.0							2.5	4.9
ESE	.6	.5	.1									1.2	4.2
SE	.6	.6	.4									1.6	4.7
SSE		.7	.7	.1								1.4	7.0
S	1.2	1.3	1.6	.6								4.7	6.5
SSW	.9	2.3	1.7	.5								5.7	6.2
SW	1.5	2.3	1.5	.1	.0							5.7	5.4
WSW	1.0	1.5	1.9	.4	.1							4.9	5.7
W	2.2	3.8	1.7	1.0	.1							8.8	6.1
WNW	.9	2.1	2.8	.8	.2	.1						7.0	7.9
NW	1.1	2.1	2.2	.4	.1	.0						5.9	6.8
NNW	1.2	1.9	1.5	.3								4.8	5.7
VARBL													
CALM												22.1	
	17.9	28.9	23.7	6.8	.7	.2						100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 2139

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	3.1	2.5	.8								8.2	6.2
NNE	1.1	2.6	2.2	.8	.0							6.7	6.8
NE	2.0	3.1	2.4	.8	.0							8.3	6.2
ENE	.8	1.3	1.2	.0								3.3	5.6
E	.7	1.2	.6	.1								2.7	5.2
ESE	.3	.3	.1	.1								1.0	4.9
SE	.2	.5	.3	.0								1.1	5.7
SSE	.4	.8	.3	.1								1.5	5.4
S	.9	2.1	1.5	.7								5.2	6.6
SSW	.7	1.5	1.7	.2	.1							4.3	6.7
SW	1.3	1.8	1.4	.2								4.8	5.5
WSW	1.2	1.5	1.6	.7	.1							5.1	6.7
W	2.4	3.7	2.3	.7	.1							9.4	6.0
WNW	1.0	1.8	2.9	1.0	.4	.1						7.2	8.3
NW	1.4	1.2	2.2	.7	.1	.0						5.7	7.0
NNW	1.2	1.3	1.0	.3								4.0	5.7
VARBL													
CALM												21.5	
	17.8	28.1	24.2	7.3	1.0	.2						100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 2138

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824	SAVANNAH GEORGIA/HUNTER AAF	48-70	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0900-1100
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	2.5	2.7	.6	.1							7.4	6.5
NNE	.9	2.3	2.4	1.7	.0	.0						7.4	7.9
NE	.8	3.1	3.9	1.4	.2							9.5	7.6
ENE	.6	1.9	3.0	.6		.0						6.2	7.4
E	1.2	1.2	1.4	.3		.0						4.1	6.3
ESE	.4	.8	.4	.1								1.7	5.5
SE	.5	.6	.5	.2								1.7	6.1
SSE	.3	.5	.6	.5								1.9	7.7
S	.5	1.5	1.8	1.0	.0							5.0	7.7
SSW	.5	1.3	1.8	1.4	.3	.0						5.4	9.2
SW	.7	1.3	2.2	1.2								5.4	7.8
WSW	.8	1.8	2.1	1.3	.0							6.0	7.7
W	1.3	2.3	3.4	2.4	.4	.2						10.1	8.9
WNW	.4	1.2	3.1	3.0	.5	.2	.0					8.5	10.7
NW	.7	1.8	2.0	1.7	.3	.1						6.8	9.2
NNW	1.1	1.1	1.8	.8								4.9	7.0
VARBL													
CALM												5.1	
	12.4	25.3	33.1	18.3	2.0	.7	.0					100.0	7.4

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.9	2.1	.4								5.4	6.5
NNE	.6	2.2	1.7	1.4	.1							6.1	8.0
NE	.7	1.8	2.0	1.1	.1							5.7	7.8
ENE	.5	2.2	2.8	1.2	.1							6.8	7.9
E	.8	2.0	2.2	.4		.0						5.5	6.8
ESE	.3	.7	1.4	.1								2.5	6.8
SE	.3	.6	1.2	.5								2.6	7.6
SSE	.1	.8	.8	1.4	.4	.0						3.6	11.2
S	.7	1.9	2.5	1.9	.2							6.9	8.2
SSW	.6	1.1	1.5	1.6	.2							5.0	9.2
SW	.5	.8	2.0	1.6	.2	.1						5.2	9.6
WSW	.6	1.2	2.4	2.4	.4							6.9	9.8
W	1.2	2.2	3.7	4.4	1.0	.2						12.8	10.2
WNW	.4	1.5	3.3	3.6	1.0	.5	.1					10.5	11.4
NW	.4	.7	2.2	2.2	.4	.3						6.3	11.1
NNW	.5	1.3	2.5	.7	.0	.0						5.0	7.9
VARBL													
CALM												3.6	
	9.2	22.8	34.3	24.6	4.2	1.2	.1					100.0	8.7

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS)

1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.8	1.7	.7								4.9	7.2
NNE	.7	.9	1.4	.9								3.8	7.5
NE	.7	1.3	1.4	.7								4.1	7.0
ENE	.4	1.4	2.1	.8	.2							4.8	8.3
E	.7	3.0	2.9	.5	.1							7.2	8
ESE	.6	1.8	1.9	.5								4.7	.6
SE	.6	2.3	1.7	1.1								5.7	7.3
SSE	.6	2.4	3.7	1.7	.1							8.6	8.1
S	.6	2.4	3.6	1.1								7.6	7.6
SSW		.6	.9	.3								1.9	8.2
SW	.3	1.2	1.1	.5	.2	.0						3.3	8.2
WSW	.5	1.2	2.4	1.2	.2							5.5	8.9
W	.6	2.4	5.6	3.4	1.1	.2						13.3	9.6
WNW	.7	1.6	4.1	3.9	1.2	.3	.0					11.8	10.7
NW	.1	1.9	2.3	1.6	.2	.1						6.4	9.2
NNW	.3	1.0	1.6	.8	.2							3.9	8.4
VARBL													
CALM												2.6	
	8.0	27.2	38.3	19.7	3.5	.7	.0					100.0	8.3

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 40-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.1	1.5	.1								3.6	6.2
NNE	.8	1.2	1.3	.7								4.0	7.4
NE	.8	1.5	1.5	.7								4.6	6.8
ENE	.9	2.1	2.0	.6								5.6	6.7
E	2.0	3.0	1.6	.1								6.8	5.1
ESE	1.6	1.6	1.1	.0								4.4	4.8
SE	2.4	1.5	1.0	.2								5.1	4.6
SSE	1.7	2.3	1.7	1.1								6.8	6.5
S	2.3	3.6	2.8	.4	.0							9.1	5.8
SSW	.8	1.2	1.2	.4	.0							3.6	6.6
SW	.7	1.1	.7	.2	.0							2.8	5.8
WSW	1.2	1.3	.7	.3								3.5	5.5
W	2.2	4.6	1.8	1.0	.3							9.9	6.3
WNW	1.3	2.5	3.5	1.0	.3	.0						8.6	7.7
NW	1.1	1.4	1.1	.7	.1	.1	.0					4.5	7.4
NNW	.3	.8	.9	.3								2.4	6.9
VARBL													
CALM												14.8	
	20.9	30.9	24.4	8.0	.9	.1	.0					100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	1.3	1.2	.1								3.3	5.7
NNE	.7	1.8	1.6	1.0	.0							5.1	7.5
NE	1.2	2.1	2.2	.6	.1							6.1	6.7
ENE	1.2	1.8	1.4	.4								4.8	6.0
E	1.4	1.6	.6	.2								3.8	4.8
ESE	1.2	.7	.4	.0								2.2	4.1
SE	1.4	.7	1.2	.0								3.4	5.2
SSE	1.1	.7	1.7	.7								4.3	7.3
S	2.4	2.6	2.0	.4								7.4	5.6
SSW	1.3	1.7	1.4	.3	.1							4.9	6.2
SW	1.0	1.1	1.2	.3	.1							3.7	6.5
WSW	1.6	1.3	.7	.2	.1	.0						3.9	5.4
W	3.1	3.7	2.1	.8	.1	.1						10.0	5.8
WNW	.6	1.8	2.3	1.4	.3	.0						6.4	8.5
NW	.7	1.8	1.8	.5	.1	.0						5.0	7.3
NNW	.4	.9	1.1	.3								2.7	6.8
VARBL													
CALM												23.0	
	20.1	25.6	22.8	7.3	1.0	.2						100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	1.2	1.1	.5								3.6	6.4
NNE	.9	2.4	1.9	.5	.3							5.8	7.0
NE	1.6	2.6	2.8	.8	.1							7.8	6.5
ENE	1.3	1.7	1.4	.6								5.0	6.3
E	1.3	1.6	1.2	.1								4.3	5.3
ESE	.6	.4	.2									1.1	4.0
SE	.5	1.1	.3	.2								2.1	5.4
SSE	.7	.7	1.0	.4	.1	.1						2.8	7.5
S	1.9	2.1	2.4	.9	.2							7.4	6.7
SSW	.7	1.7	2.4	1.1								5.9	7.6
SW	2.1	2.1	1.4	.4								6.1	5.4
WSW	1.7	2.2	1.9	.3	.1							6.2	5.7
W	2.7	2.3	1.9	.8	.4	.1						8.2	6.6
WNW	.5	1.6	2.0	1.5	.2							5.7	8.6
NW	1.0	1.7	1.9	1.2	.1							5.8	7.5
NNW	.9	.9	1.3	.6	.1							3.3	7.9
VARBL													
CALM												18.9	
	18.5	26.3	25.1	9.7	1.4	.2						100.0	5.4

TOTAL NUMBER OF OBSERVATIONS 1950

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	2.0	1.5	.5								5.2	6.0
NNE	1.0	2.5	2.1	.7	.2							6.5	6.9
NE	1.0	2.8	3.5	.7	.2							8.3	7.2
ENE	.9	1.2	1.5	.6								4.2	6.9
E	.8	1.3	.5	.2								2.8	5.4
ESE	.4	.3	.3									.9	4.6
SE	.2	.6	.5									1.2	5.9
SSE	.6	.9	1.0	.2								2.7	6.4
S	1.3	1.8	2.2	.9	.2							6.4	7.2
SSW	.7	1.8	1.7	.9	.3	.2						5.5	8.5
SW	.9	1.9	1.3	.5	.1							4.7	6.5
WSW	2.2	1.9	1.3	.5	.1	.1						6.1	5.6
W	3.1	3.2	2.8	.7	.4		.1					10.2	6.2
WNW	.9	1.8	2.2	1.3	.2							6.3	7.9
NW	1.0	1.9	1.7	1.1								5.7	7.3
NNW	.7	1.4	1.5	.6	.1							4.4	7.2
VARBL													
CALM												19.0	
	16.7	27.5	25.6	9.3	1.5	.2	.1					100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 1950

USAFETAC FORM 0-8 5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS)

0600-0800 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	2.2	1.9	.4	.1							6.5	5.5
NNE	1.6	2.8	2.7	1.2	.1							8.4	6.8
NE	.9	2.6	3.7	1.3	.2							8.6	7.9
ENE	.9	1.8	2.2	.4	.1							5.4	6.6
E	.9	1.2	.6	.1								2.7	5.0
ESE	.1	.4	.2	.1								.7	6.0
SE	.3	.2	.1	.1								.6	5.3
SSE	.4	.7	.8	.2	.1							2.2	7.1
S	1.0	1.8	2.1	1.0	.1	.1						6.1	7.6
SSW	.6	1.6	1.7	.7	.2							4.8	7.5
SW	1.7	1.8	1.6	.7	.1		.1					6.0	6.6
WSW	1.7	1.3	1.7	.6	.1	.1						5.5	6.8
W	2.2	3.5	3.1	.8	.1	.2						9.9	6.6
WNW	1.5	2.2	2.3	1.4	.2	.3						7.8	7.9
NW	.8	1.7	1.3	.8								4.6	6.6
NNW	.6	1.3	1.2	.3								3.4	6.4
VARBL													
CALM												16.9	
	16.9	27.3	27.2	9.9	1.1	.6	.1					100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 1949

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	2.7	1.7	.9								6.4	6.5
NNE	.7	1.9	3.2	1.8	.1							7.6	8.6
NE	.9	2.1	3.3	2.2	.5							8.9	8.8
ENE	.7	1.5	3.7	2.1	.2							8.2	8.8
E	.6	1.3	2.4	.6								4.9	7.3
ESE	.6	.4	.4	.3								1.7	6.0
SE	.4	.5	.4	.1								1.3	5.5
SSE	.2	.6	.9	.5	.1							2.3	8.7
S	.7	1.1	1.7	1.5	.2	.1						5.3	8.9
SSW	.5	1.0	2.3	2.0	.3	.1						6.2	9.5
SW	.4	1.4	2.2	1.2	.2							5.3	8.5
WSW	.7	2.3	1.6	1.1	.3	.1	.1					6.3	8.8
W	1.2	2.7	3.8	2.2	.7	.2	.1	.1				11.0	9.3
WNW	.4	1.4	2.7	3.4	.6	.2	.2					8.8	11.2
NW	.6	1.3	2.8	1.9	.3							6.9	9.0
NNW	.4	1.6	1.9	.9	.1							5.0	8.0
VARBL													
CALM												4.0	
	9.9	23.9	35.0	22.0	3.6	.6	.4	.1				100.0	8.4

TOTAL NUMBER OF OBSERVATIONS 1949

USAFETAC FORM 0 8 5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.4	1.3	1.0								4.7	7.3
NNE	.6	1.6	2.2	1.2								5.6	7.9
NE	.4	1.0	1.9	1.6	.3	.1						5.3	9.5
ENE	.5	1.0	3.0	1.8	.2	.1						6.7	9.3
E	.8	1.1	2.5	2.2	.1							6.7	8.7
ESE	.3	.8	1.4	.3								2.9	6.9
SE	.4	.6	.6	.4	.1							2.1	7.1
SSE	.4	.8	2.2	1.6	.5							5.5	10.2
S	.4	1.7	3.5	2.1	.3							8.0	9.2
SSW	.4	1.7	1.3	1.5	.3							5.2	8.9
SW	.3	1.5	1.3	1.4	.3							4.8	9.2
WSW	.1	1.0	2.7	2.5	.4	.5						7.2	11.4
W	.4	2.2	4.6	4.1	1.3	.7	.1	.2				13.5	11.4
WNW	.4	1.0	3.1	4.2	1.2	.7	.2					10.7	12.2
NW	.2	1.2	2.4	1.4	.4	.1						5.6	9.5
NNW	.3	1.2	1.4	1.1	.1	.1						4.4	8.6
VARBL													
CALM												1.1	
	7.1	19.9	35.6	28.3	5.5	2.1	.3	.2				100.0	9.6

TOTAL NUMBER OF OBSERVATIONS 1949

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	1.1	1.6	.5								3.5	7.4
NNE	.3	.8	1.5	.9								3.5	8.4
NE	.3	1.0	1.4	.6	.3							3.6	8.7
ENE	.5	.8	2.5	2.1	.1	.2						6.2	9.7
E	.5	2.1	4.4	1.6								8.6	8.2
ESE	.5	2.0	2.6	.8								5.9	7.7
SE	.5	1.0	1.8	.6	.1							4.1	7.9
SSE	.6	2.1	5.6	2.6	.3							11.2	9.0
S	.5	1.6	3.9	2.2	.2							8.4	9.1
SSW	.1	.6	1.0	1.0								2.7	9.6
SW	.1	.4	1.3	.8	.1							2.7	10.0
WSW	.1	.6	1.9	1.8	.4							4.8	10.8
W	.6	1.6	4.6	4.4	1.8	.8	.2					14.0	12.0
WNW	.3	.9	3.1	3.9	1.3	.5	.1					10.1	12.3
NW	.1	1.6	2.3	2.3	.6							6.8	10.0
NNW	.4	.9	1.3	.5	.1							3.2	8.0
VARBL													
CALM												.9	
	5.5	19.0	41.0	26.7	5.1	1.5	.3					100.0	9.6

TOTAL NUMBER OF OBSERVATIONS 1930

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-70 (YEARS) | FEB (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.3	1.1	.2								3.5	5.7
NNE	.3	.7	1.3	.7								2.9	8.1
NE	.8	.8	1.8	.9	.1							4.3	7.9
ENE	.8	1.6	3.4	1.0	.1							6.6	7.7
E	1.9	3.4	3.2	.3								8.8	5.9
ESE	.8	1.6	1.3	.1								3.8	5.4
SE	2.1	1.8	.9	.2								5.0	4.7
SSE	1.8	3.7	3.4	.6								9.6	5.0
S	2.2	4.6	3.6	1.5	.1							12.0	6.7
SSW	.3	1.1	1.7	.5								3.6	7.4
SW	.7	.7	.8	.2								2.5	5.9
WSW	1.0	1.0	1.4	.4								3.8	6.5
W	1.3	3.2	2.5	2.0	.3	.3	.1					9.5	8.4
WNW	.8	2.3	2.9	1.5	.5	.2	.1					8.2	9.0
NW	.9	1.2	1.7	.4	.2							4.4	6.9
NNW	.4	1.2	1.0	.1	.1							2.7	6.6
VARBL													
CALM												8.7	
	17.0	30.4	31.9	10.4	1.1	.4	.2					100.0	6.3

TOTAL NUMBER OF OBSERVATIONS 1950

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13624 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	1.1	1.1	.1								2.8	6.5
NNE	.6	1.3	1.7	.6								4.3	7.3
NE	.4	2.4	2.8	.7	.1							6.3	7.4
ENE	.8	2.6	1.8	.6	.1							5.7	6.5
E	1.6	2.6	.9	.2								5.4	4.8
ESE	1.1	.9	.9									2.8	4.9
SE	1.0	.7	.4	.2	.1							2.2	5.3
SSE	1.7	1.2	1.6	.5	.1							5.1	6.1
S	2.9	3.7	3.1	.9	.3							10.9	6.4
SSW	.9	1.5	2.2	.6								5.2	6.9
SW	1.2	1.1	1.3	.3	.1							4.0	6.1
WSW	1.3	1.2	1.3	.4								4.2	5.7
W	2.7	3.6	2.2	1.3	.3	.1						10.1	6.6
WNW	.3	1.2	2.0	1.5	.5							5.5	9.7
NW	1.0	1.6	1.4	.8	.1	.1						5.0	7.0
NNW	.3	.8	.9	.7	.1							2.7	8.5
VARBL													
CALM												17.7	
	18.4	27.4	25.7	9.2	1.5	.1						100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 1948

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	1.0	.8	.3								3.3	5.5
NNE	.6	.8	1.4	.4								3.2	7.1
NE	1.3	1.1	.7	.3	.1							3.6	6.0
ENE	1.2	1.5	1.2	.7	.0							4.6	6.6
E	1.5	1.8	.8	.3								4.4	5.4
ESE	.8	.7	.3	.1								1.9	4.7
SE	.7	.7	.3	.1								1.9	5.1
SSE	1.0	1.1	.7	.3	.2							3.3	6.5
S	2.5	2.7	2.9	1.4	.2	.1						9.9	7.0
SSW	1.5	2.3	1.8	1.0	.0							6.5	6.5
SW	1.7	1.9	1.9	.2	.1							5.8	5.9
WSW	1.2	1.8	2.0	.3		.0						5.3	6.4
W	2.7	3.4	2.2	.9	.1							9.4	6.1
WNW	1.1	1.6	1.7	1.8	.6	.1						6.6	9.2
NW	1.0	1.9	2.1	1.0	.1	.1						6.4	7.6
NNW	.7	1.1	1.1	.4								3.4	6.6
VARBL													
CALM												20.6	
	20.6	25.4	21.9	9.4	1.7	.3						100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 2047

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	1.4	1.0	.4	.0							4.1	6.0
NNE	1.2	1.2	1.4	.7	.0							4.5	6.5
NE	1.4	1.7	1.9	.4	.1							5.5	6.4
ENE	1.0	1.2	.6	.6	.0							3.5	6.5
E	1.3	1.0	.6	.1								3.0	5.1
ESE	.6	.4	.2	.1								1.3	5.1
SE	.4	.5	.2	.1	.0							1.4	5.8
SSE	.3	1.1	.6	.3	.1							2.7	7.3
S	1.3	2.5	2.3	1.4	.2	.0						7.8	7.5
SSW	1.2	2.1	1.9	.6								5.8	6.4
SW	1.1	2.2	1.2	.3								4.9	5.8
WSW	2.0	2.1	1.5	.5								6.0	5.6
W	2.5	3.5	2.5	1.1	.2							9.9	6.4
WNW	1.2	2.0	2.0	1.5	.3	.1						7.0	8.3
NW	1.8	1.9	2.0	.7	.2							6.5	6.6
NNW	1.2	1.7	1.4	.2								4.5	5.6
VARBL													
CALM												21.7	
	19.9	26.6	21.2	9.1	1.4	.1						100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 2050

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	1.6	1.1	.6								4.7	6.1
NNE	1.2	1.6	1.8	.9	.1							5.6	7.1
NE	1.4	1.3	2.4	1.0	.2							6.3	7.3
ENE	.9	1.4	1.4	1.0	.1							4.9	7.4
E	1.1	1.2	.9	.2								3.4	5.5
ESE	.5	.7	.3	.2								1.7	5.6
SE	.3	.6	.2	.1								1.2	5.5
SSE	.6	.8	.5	.2	.0							2.1	6.3
S	1.1	1.5	2.3	1.0	.1							6.0	7.5
SSW	1.4	2.0	2.3	1.2	.1	.0						7.0	7.5
SW	1.3	1.8	1.6	.9	.1							5.4	6.5
WSW	1.2	1.9	2.0	.7	.2							5.9	6.9
W	2.2	3.1	2.9	1.7	.2							10.2	7.1
WNW	1.0	2.4	2.3	1.5	.4							7.7	8.1
NW	1.2	1.6	1.9	.4	.1							5.2	6.6
NNW	1.1	1.5	.9	.3	.1							3.9	6.1
VARBL													
CALM												18.7	
	18.1	24.9	24.6	11.7	2.0	.0						100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 2102

USAFETAC FORM 0 8 5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	1.4	1.5	.6								3.?	7.2
NNE	.4	1.6	2.0	.9	.0							5.0	7.7
NE	.5	1.8	3.2	2.4	.2							8.0	9.0
ENE	.7	1.7	2.4	1.4	.2							6.4	8.5
E	.7	1.8	2.9	1.4	.0							6.7	8.3
ESE	.7	.9	1.0	.5								3.0	6.9
SE	.3	.8	.8	.1								2.0	6.3
SSE	.3	1.1	1.3	.5	.2	.1	.1					3.7	9.3
S	.6	1.4	2.3	1.8	.3							6.3	9.0
SSW	.6	1.1	2.1	2.2	.3	.1						6.5	9.8
SW	.5	1.1	2.5	1.5	.2	.0						5.9	9.0
WSW	.3	1.1	3.1	2.0	.2	.2						6.9	10.0
W	1.0	2.0	3.0	3.8	.9	.2						11.0	10.1
WNW	.6	1.5	3.3	2.4	1.1	.1						8.9	10.5
NW	.6	1.2	2.8	1.9	.6							7.0	9.6
NNW	.5	1.5	2.0	.7	.3							4.9	8.2
VARBL													
CALM												3.8	
	8.7	21.9	35.9	24.0	4.8	.8	.1					100.0	8.7

TOTAL NUMBER OF OBSERVATIONS 2127

USAFETAC FORM JUL 64 0-8 5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS)

1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2	.9	1.0	.5	.0							2.7	7.7
NNE	.3	1.1	1.4	.6	.0							3.4	8.0
NE	.4	1.2	2.0	.8	.2							4.6	8.2
ENE	.3	.9	1.8	1.2	.3	.0						4.5	9.5
E	.3	2.0	3.4	2.6	.1							8.5	9.2
ESE	.3	.9	1.5	1.7	.0							4.5	9.2
SE	.3	1.1	2.2	.7	.0							4.3	8.2
SSE	.4	1.5	2.5	1.5	.6	.1	.1					6.6	9.8
S	.6	1.2	3.6	3.1	.3	.2						9.0	9.9
SSW	.2	.7	1.4	1.1	.4	.2						4.0	10.6
SW	.3	.7	2.0	1.4	.4	.2	.0					5.1	10.6
WSW	.2	1.3	2.1	2.4	.7	.4						7.2	11.5
W	.7	1.7	3.6	4.6	2.4	.5	.1					13.7	12.3
WNW	.5	1.2	2.8	4.4	1.3	.3	.0					10.5	11.9
NW	.4	.8	2.0	1.7	.7	.1						5.8	10.9
NNW	.3	.5	1.4	.8	.3							3.3	9.5
VARBL													
CALM												2.3	
	5.8	17.7	34.8	29.1	7.9	2.1	.3					100.0	10.0

TOTAL NUMBER OF OBSERVATIONS 2126

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.5	1.1	.5	.1							2.6	8.5
NNE	.1	.3	1.2	.2								1.9	8.4
NE	.1	1.0	1.2	.4	.1							2.9	7.9
ENE	.3	.7	1.4	.9	.2	.0						3.5	9.7
E	.4	1.1	4.5	2.5	.0							8.6	9.2
ESE	.2	1.5	3.8	1.5	.1							7.0	8.8
SE	.4	1.4	3.6	1.3								6.8	8.2
SSE	.2	2.3	6.2	4.2	.8	.1	.0					13.8	10.1
S	.4	1.4	4.9	3.2	.2							10.1	9.6
SSW	.2	.3	1.1	1.2	.2	.0						3.1	10.3
SW	.1	.1	1.1	1.1	.2	.1						2.7	11.6
WSW	.2	.4	1.6	1.6	.7	.5	.0					5.0	12.7
W	.4	.9	2.9	5.4	2.6	.7	.0					12.8	13.3
WNW	.1	1.4	2.8	3.7	1.2	.5	.0					9.7	12.1
NW	.3	1.0	1.6	2.2	.6	.1						5.8	10.9
NNW	.2	.6	.7	1.0	.1	.0						2.7	10.2
VARBL													
CALM												1.0	
	4.1	14.8	39.7	31.0	7.1	2.1	.2					100.0	10.3

TOTAL NUMBER OF OBSERVATIONS 2102

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824	SAVANNAH GEORGIA/HUNTER AAF	48-70	MAR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1800-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.5	.5	.2	.1							1.7	7.3
NNE	.2	.5	.6	.5	.0							2.0	8.4
NE	.4	.3	1.2	.6	.1							2.7	8.6
ENE	.3	1.0	1.4	.8	.1	.0						3.6	8.9
E	1.1	3.4	2.9	.6								7.9	6.5
ESE	1.2	2.6	1.9	.5								6.2	6.1
SE	2.1	2.4	2.0	.2								6.7	5.4
SSE	1.7	4.8	3.4	1.1	.1	.0						11.2	6.7
S	2.9	4.6	5.9	1.9	.0	.0						15.3	7.0
SSW	.7	1.1	1.7	.7	.0	.0						4.3	7.6
SW	.6	1.2	1.2	.6	.1	.1						3.8	8.3
WSW	.6	.8	1.2	.7	.4							3.7	8.9
W	1.2	2.5	3.3	1.8	.5	.0						9.2	8.3
WNW	.8	2.0	2.5	2.3	.3	.1						8.0	9.1
NW	.5	1.0	1.4	.8	.2	.0						3.9	8.6
NNW	.3	.9	.9	.3	.0							2.4	7.1
VARBL													
CALM												7.4	
	15.0	29.6	31.7	13.6	2.3	.8						100.0	6.9

TOTAL NUMBER OF OBSERVATIONS 2051

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.7	.4	.1								1.8	5.6
NNE	.3	.6	.2	.5	.0							1.7	8.1
NE	.9	1.1	1.2	.7	.1	.0						4.1	7.6
ENE	1.1	1.3	1.2	.7	.1							4.4	7.1
E	2.0	3.6	1.6	.1	.0							7.3	5.2
ESE	1.5	.9	.7	.4	.0							3.5	5.8
SE	1.2	1.1	.3									2.6	4.1
SSE	1.3	2.5	1.8	.8	.2							6.6	7.0
S	2.7	4.7	4.2	1.7	.2	.0						13.6	6.9
SSW	1.6	2.0	2.1	.8		.1						6.6	6.9
SW	1.4	1.4	1.4	.8	.0							5.1	6.6
WSW	1.3	1.7	1.0	.8								4.7	6.3
W	2.1	2.3	1.4	.7	.0	.0						6.6	6.0
WNW	1.1	1.0	1.9	.9	.4	.2						5.5	8.8
NW	1.0	1.1	1.3	1.0	.2	.0	.0					4.7	8.2
NNW	.2	.6	1.1	.4	.0							2.5	8.3
VARBL													
CALM												18.7	
	20.1	26.5	21.8	10.7	1.6	.5	.0					100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 2047

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.4	.7	.3								2.2	6.5
NNE	.2	.7	.6	.3								1.8	6.7
NE	1.1	1.0	.7	.4	.1							3.2	6.1
ENE	.7	1.1	1.4	.6	.1							3.9	7.3
E	2.1	1.4	1.0	.2								4.7	4.9
ESE	1.3	1.1	.5									2.9	4.3
SE	.8	1.4	.4	.2								2.8	4.9
SSE	1.1	1.4	1.0	.3	.1							3.9	6.0
S	2.5	4.1	2.9	.6	.1							10.1	5.9
SSW	1.7	3.3	2.4	.8	.1							8.4	6.2
SW	2.1	3.2	1.9	.8	.1							8.0	6.0
WSW	1.2	2.1	1.9	1.0								6.1	6.6
W	1.6	2.8	1.6	.3	.3							6.8	6.3
WNW	1.0	1.0	1.0	.5	.1	.2						3.7	7.4
NW	1.2	1.2	.9	.3								3.5	5.6
NNW	.6	1.5	.7	.2								3.0	5.8
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	25.0	
	20.0	27.6	19.5	6.9	.8	.2						100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 1889

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 1.	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.4	.8	.2								3.3	5.5
NNE	.5	1.0	.7	.3								2.5	6.4
NE	1.3	1.6	1.5	.5								4.9	6.5
ENE	1.2	.9	1.0	.6	.1							3.8	7.0
E	1.5	1.3	.8									3.6	4.4
ESE	.6	.9	.2									1.7	4.4
SE	.8	1.3	.4									2.5	4.7
SSE	.7	1.3	.7	.1								2.9	5.6
S	2.3	2.1	1.4	.6								6.9	5.3
SSW	1.2	1.8	1.9	.6								5.4	6.4
SW	3.0	3.2	2.3	.4	.1							8.9	5.3
WSW	2.1	3.0	2.1	.5				.1				7.8	5.9
W	1.9	3.5	1.5	.6	.2	.1						7.7	5.9
WNW	.9	1.4	1.1	.5	.2	.1						4.1	7.2
NW	1.2	1.4	.7	.3	.1							3.6	5.5
NNW	.5	1.2	1.2	.4	.1							3.3	6.9
VARBL													
CALM												27.0	
	21.1	27.4	18.2	5.5	.6	.1		.1				100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS)

0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	1.4	1.5	.5								5.1	6.0
NNE	1.3	1.5	1.4	.5		.1						4.7	6.3
NE	1.2	1.5	1.6	.7	.1							5.1	6.9
ENE	1.1	1.0	2.3	.6	.1							5.1	7.2
E	.9	1.9	.9	.2	.1							3.9	5.8
ESE	.5	1.0	.3	.1								1.8	4.9
SE	.7	1.2	.6	.1								2.6	5.4
SSE	.7	.8	.7	.5								2.6	6.7
S	1.2	2.1	1.8	.7	.1	.1						5.8	6.6
SSW	.9	2.2	1.8	.4	.1							5.4	6.4
SW	2.0	2.8	3.2	.8								8.8	6.3
WSW	1.5	2.9	2.8	.6	.1							8.1	6.2
W	1.8	3.8	2.3	1.2								9.0	6.4
WNW	.8	1.2	1.5	1.0	.2							4.8	8.0
NW	1.3	1.2	.7	.5	.1							3.7	6.1
NNW	.7	1.2	1.2	.4	.2							3.7	7.2
VARBL													
CALM												19.8	
	18.3	27.6	24.6	8.6	.9	.1						100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 1939

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-68,70 (YEARS) | APR (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	1.4	2.8	.9	.2							6.0	7.9
NNE	.3	1.1	1.9	.5	.1							3.7	8.0
NE	.4	.9	1.2	.8	.1							3.4	8.1
ENE	.5	1.1	2.5	1.3	.4	.2						6.0	9.6
E	.6	1.5	3.8	1.8	.2							7.9	8.6
ESE	.6	1.5	1.3	.8	.1							4.2	7.4
SE	.5	1.1	1.5	.5								3.5	7.4
SSE	.3	1.7	2.1	1.3	.2							5.5	8.6
S	.7	1.8	3.9	1.2	.3							7.8	8.4
SSW	.5	1.6	2.9	1.7	.2	.1						7.0	9.0
SW	.3	2.0	2.6	1.8	.1							6.9	8.4
WSW	.5	1.5	4.0	2.2	.3	.1						8.5	9.0
W	1.1	2.4	3.8	3.1	.9	.1						11.5	9.3
WNW	.6	1.5	2.6	3.0	.3	.3						8.3	10.1
NW	.1	.6	1.1	.6	.7	.1						3.1	11.0
NNW	.5	.9	1.5	.8	.2							3.9	8.4
VARBL													
CALM												3.0	
	8.2	22.6	39.6	22.1	3.9	.7						100.0	8.5

TOTAL NUMBER OF OBSERVATIONS 1963

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	1.1	2.1	.7	.1							4.2	8.3
NNE	.3	.7	.9	.4	.1							2.3	7.8
NE	.2	.6	.7	.5								1.9	8.1
ENE	.2	.7	1.8	.9	.3	.1						4.0	9.7
E	.2	1.8	3.2	2.6	.6	.1						8.5	10.0
ESE	.4	1.1	3.0	1.1	.1							5.6	8.6
SE	.3	1.3	3.2	1.7	.1							6.6	8.8
SSE	.3	1.6	6.6	3.9	.3							12.6	9.7
S	.5	1.9	4.6	3.2	.6	.1						10.8	9.8
SSW	.3	1.0	2.2	.8	.3	.1						4.6	8.9
SW	.3	1.0	2.3	1.3	.6	.2						5.5	10.3
WSW	.3	1.1	2.7	2.5	.8	.1	.1					7.4	10.8
W	.4	1.4	3.8	3.9	1.5	.5						11.5	11.7
WNW	.4	1.0	2.4	2.5	.9	.2	.1					7.5	11.2
NW	.2	.7	1.3	.9	.3	.2	.1					3.6	10.6
NNW	.1	.4	1.1	.7								2.3	9.1
VARBL													
CALM												1.1	
	4.4	17.2	41.6	27.6	6.5	1.4	.2					100.0	9.8

TOTAL NUMBER OF OBSERVATIONS 1964

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS)

1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2	.4	1.2	.4								2.2	8.1
NNE	.1	.2	.5	.4								1.2	9.1
NE		.5	.2	.3								1.0	8.0
ENE	.2	.4	.6	1.1	.5							2.7	11.5
E	.4	1.3	3.9	3.1	.4							9.0	9.9
ESE	.4	1.4	4.0	1.9	.1							7.7	8.7
SE	.3	1.4	5.2	2.5	.2							9.5	9.2
SSE	.1	1.9	10.7	5.7	.3							18.8	10.0
S	.1	1.5	7.4	4.0	.5	.1						13.6	10.1
SSW	.2	.2	1.3	.8	.2	.1						2.6	10.8
SW	.2	.4	1.1	1.2	.5	.1						3.5	11.8
WSW	.3	.5	2.0	1.9	.7	.2						5.5	11.5
W	.1	1.0	2.9	4.8	1.1	.2						10.1	12.1
WNW	.2	.8	2.1	2.5	1.1	.1	.1					6.8	12.1
NW	.1	.6	1.0	1.2	.9	.1						3.4	11.2
NNW		.3	.9	.8	.1	.1						1.9	9.9
VARBL													
CALM												.6	
	2.5	12.7	45.0	32.3	6.1	.7	.1					100.0	10.3

TOTAL NUMBER OF OBSERVATIONS 1939

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
3 WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.4	.4	.3								1.5	7.4
NNE	.2	.1	.6	.2								1.1	7.7
NE	.2	.1	.3	.2								.7	8.2
ENE	.3	.8	1.4	1.2	.1							3.7	9.0
E	1.1	2.9	4.2	1.0	.2							9.4	7.5
ESE	1.5	3.3	1.9	.3	.1							7.0	5.7
SE	2.1	3.5	2.7	.4	.1							8.7	5.9
SSE	2.2	5.2	6.5	1.5	.1	.1						15.6	7.1
S	1.5	7.5	7.8	1.2	.3	.1						18.3	7.2
SSW	.4	1.3	1.6	.8	.1	.1		.1				4.3	8.5
SW	.8	1.1	2.2	.5	.2							4.7	7.6
WSW	.6	1.4	1.5	.5								4.1	6.9
W	1.3	1.6	2.3	1.3	.1							6.6	7.4
WNW	.6	1.3	1.8	.8	.1	.1						4.7	7.8
NW	.8	.5	1.2	.4	.2							3.4	7.3
NNW	.3	.4	.4	.1								1.1	5.9
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	5.2	
	14.0	31.9	36.7	10.5	1.4	.3		.1				100.0	6.8

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.3	.4	.1								1.1	6.1
NNE	.1	.4	.3	.2								.9	6.3
NE	.4	.8	.5	.4								2.1	7.1
ENE	.8	1.5	1.8	1.1								5.1	7.4
E	2.3	2.3	1.3	.6								6.8	5.6
ESE	1.2	1.6	.3	.1								3.2	4.4
SE	1.6	2.2	.7	.4	.1							5.0	5.2
SSE	1.9	3.3	2.1	.6	.1	.1	.1					8.0	6.3
S	3.0	6.7	5.6	1.2	.1							16.5	6.3
SSW	1.9	2.8	3.0	1.0	.1							8.6	6.7
SW	2.0	2.7	1.6	.4	.2							6.8	5.9
WSW	1.0	1.5	1.3	.1	.1	.1						4.0	6.1
W	1.3	2.0	1.1	.2	.1							4.6	5.5
WNW	.6	.8	.8	.3	.1	.1						2.6	7.3
NW	.3	1.2	1.2	.5	.1							3.1	7.6
NNW	.1	.4	.5	.2								1.2	7.0
VARBL													
CALM												20.3	
	18.6	30.6	22.4	7.1	.7	.2	.1					100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 1890

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	1.0	.7	.1								3.1	5.3
NNE	1.4	1.4	.6	.2	.0							3.7	5.3
NE	1.6	1.6	.3	.0								3.5	4.2
ENE	1.0	1.3	.5	.4								3.2	5.7
E	1.8	2.5	1.1	.0								5.5	4.9
ESE	.8	1.8	.3									3.0	4.3
SE	.7	.8	.0									1.6	3.9
SSE	1.4	1.7	.3	.1								3.5	4.4
S	3.0	3.5	2.3	.4								9.2	5.2
SSW	2.6	3.1	2.0	.4								8.2	5.3
SW	3.9	3.8	1.5	.4								9.6	4.9
WSW	2.3	1.5	1.3	.3								5.4	5.0
W	1.5	1.3	.5	.1	.0							3.5	4.9
WNW	.7	1.2	.5	.0		.0						2.5	5.2
NW	1.2	.8	.5	.1								2.6	4.7
NNW	.7	1.0	.2	.0								2.0	4.4
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	29.8	
	26.0	28.3	12.8	3.0	.1	.0						100.0	3.5

TOTAL NUMBER OF OBSERVATIONS 2045

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
3 AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	2.0	1.2	.0								5.7	4.6
NNE	2.1	2.1	.8	.2								5.3	4.9
NE	1.8	1.6	.6	.2								4.2	4.7
ENE	1.3	.7	.7	.1								2.8	5.2
E	1.9	1.6	.7	.2								4.0	4.8
ESE	.7	.6	.2	.0								1.6	4.3
SE	1.0	1.0	.2									2.2	4.1
SSE	.6	.8	.5	.2								2.1	5.8
S	1.6	1.6	1.0	.2								4.4	5.2
SSW	2.0	2.2	1.6	.0								5.9	5.2
SW	3.4	3.9	2.2	.2								9.7	5.0
WSW	2.2	4.2	.9	.2								7.4	4.7
W	2.3	1.7	.7	.3								5.0	4.6
WNW	1.3	1.3	.3	.0								2.9	4.3
NW	1.5	.9	.4	.0								2.8	4.1
NNW	1.0	1.1	.4									2.5	4.5
VARBL													
CALM												31.4	
	26.6	27.2	12.6	2.2								100.0	3.3

TOTAL NUMBER OF OBSERVATIONS 2064

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 40-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	2.6	1.9	.3								7.0	5.4
NNE	1.8	3.4	2.2	.4								7.8	5.7
NE	1.6	1.8	1.6	.6								5.6	6.0
ENE	.8	1.5	1.3	.2								3.8	6.0
E	1.4	1.5	1.6	.6	.0							5.1	6.5
ESE	.7	.6	.4	.1								1.7	5.3
SE	.8	.8	.1	.0								1.8	4.3
SSE	.5	.8	1.1	.2								2.6	6.5
S	.8	1.0	1.2	.1								3.1	5.9
SSW	1.1	2.0	1.9	.6	.1							5.7	6.7
SW	1.8	3.6	3.1	.4								8.9	6.0
WSW	1.6	3.9	1.7	.7								7.9	5.9
W	2.4	4.2	3.3	.4	.1							10.4	5.8
WNW	1.0	1.5	.6	.3	.0							3.5	5.8
NW	1.5	1.1	1.2	.4	.0							4.2	5.8
NNW	.7	1.3	.8	.1								2.9	5.4
VARBL													
CALM												18.1	
	20.4	31.6	24.0	5.5	.3							100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 2126

USAFETAC FORM 0 8 5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	1.6	2.2	.3								4.8	7.0
NNE	.6	1.6	2.4	.6	.1							5.3	7.5
NE	.7	2.3	2.0	.8	.0							5.7	7.2
ENE	.3	1.7	2.8	1.1	.1							6.1	8.2
E	.8	1.6	3.9	2.2	.2							8.7	8.0
ESE	.5	.9	1.7	.5								3.7	7.5
SE	.5	1.5	1.5	.4								3.9	6.9
SSE	.4	1.1	2.4	.5								4.5	7.4
S	.9	2.3	2.4	.5								6.0	6.7
SSW	.5	1.8	2.1	.8								5.1	7.5
SW	.7	2.4	3.3	1.6	.1							8.1	8.0
WSW	.9	2.3	3.1	.8	.1	.0						6.9	7.5
W	1.1	1.0	4.5	1.6	.1							11.3	7.5
WNW	1.1	2.2	3.0	.8	.1	.0						7.2	7.2
NW	1.0	2.0	1.9	.6	.0							5.5	6.8
NNW	.6	1.9	.8	.6	.0							4.0	6.7
VARBL													
CALM												3.1	
	10.9	31.0	40.0	13.8	1.1	.1						100.0	7.2

TOTAL NUMBER OF OBSERVATIONS 2126

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.9	1.5	.3	.0							3.2	7.0
NNE	.7	1.0	1.5	.5	.0							3.7	7.2
NE	.4	.8	.9	.7	.0							2.9	7.8
ENE	.3	1.3	2.8	1.5	.2	.0						6.1	9.3
E	.5	1.7	4.7	2.8	.2							10.0	9.3
ESE	.1	1.6	3.2	2.0	.0							7.0	9.1
SE	.3	1.7	4.2	1.8								8.0	8.5
SSE	.3	2.4	5.0	2.0	.0							9.7	8.7
S	.5	1.7	3.6	1.3	.0							.2	6.1
SSW	.5	1.7	1.5	.8								4.5	7.3
SW	.2	1.3	1.9	1.6	.2	.1	.1					5.5	9.9
WSW	.4	1.5	2.4	1.0	.6	.1						5.9	9.2
W	1.0	3.4	4.5	2.0	.2							11.1	8.1
WNW	.3	1.3	2.1	1.2	.3	.1						5.5	9.0
NW	.6	1.1	1.7	.0	.2							4.4	8.3
NNW	.3	1.7	1.2	.3	.0							3.6	6.9
VARBL													
CALM												1.8	
	6.0	25.4	42.7	20.5	2.3	.4	.1					100.0	8.4

TOTAL NUMBER OF OBSERVATIONS 2127

USAFETAC FORM 0 6 5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.0	.6	1.3	.4	.0							2.6	8.0
NNE	.2	.7	.5	.1	.1							1.7	7.3
NE	.4	1.1	.8	.2	.1							2.5	7.0
ENE	.4	.8	1.7	1.0	.1							3.9	8.9
E	.2	1.1	5.2	3.4	.2	.0						10.3	9.8
ESE	.1	1.9	5.9	2.1								10.1	8.8
SE	.4	2.3	7.5	2.1								12.3	8.5
SSE	.3	2.4	10.3	4.8								17.8	9.2
S	.5	2.0	6.8	2.8	.1							12.1	9.0
SSW	.1	.6	1.0	.4	.0							2.3	8.6
SW	.3	.6	1.4	1.3	.2	.0						3.9	10.1
WSW	.1	.8	1.9	.9	.2							4.1	9.3
W	.2	1.7	2.7	1.5	.2							6.2	9.0
WNW	.2	.9	1.7	.9	.1		.0					4.0	8.9
NW	.1	.8	1.2	.9	.3	.0	.0					3.5	10.2
NNW	.2	.4	.8	.2								1.7	7.8
VARBL													
CALM												1.1	
	3.9	19.0	50.8	23.1	1.8	.1	.1					100.0	8.9

TOTAL NUMBER OF OBSERVATIONS 2118

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-66,68-70 (YEARS) | MAY (MONTH)

ALL WEATHER (CLASS)

1800-2000 (HOURS (L.S.T.))

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2	.9	.6	.2								2.0	6.9
NNE	.2	.3	.7	.2								1.5	8.1
NE	.1	.6	.6	.0								1.4	6.9
ENE	.5	1.3	1.1	.6								3.6	6.9
E	1.8	4.0	4.8	1.8	.1							12.4	7.2
ESE	1.4	3.0	2.5	.5								7.3	6.2
SE	2.1	3.1	3.2	.1								10.8	5.7
SSE	2.7	6.6	7.1	1.0	.0							17.5	6.5
S	3.5	7.4	7.2	.6								18.6	6.1
SSW	.9	1.6	1.5	.9	.0		.0					4.5	7.0
SW	.7	1.3	.7	.2	.1							3.0	6.3
WSW	.5	1.1	.5	.2	.0							2.3	5.1
W	.7	.8	1.1	.1			.0					2.8	6.3
WNW	.3	.8	.8	.2	.1							2.2	6.9
NW	.5	.9	.8	.1	.0		.0					2.3	6.7
NNW	.3	.3	.4	.1								1.2	6.4
VARBL													
CALM												6.3	
	16.5	36.0	33.6	6.9	.5		.1					100.0	6.1

TOTAL NUMBER OF OBSERVATIONS 2045

USAFETAC FORM 0-8-5 (OL-I) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHE SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-70 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.9	.7	.0								2.3	5.6
NNE	.4	.7	.6	.2	.1							2.1	7.1
NE	1.2	1.2	.5	.1								3.0	4.6
ENE	1.2	1.4	1.1	.4								4.0	5.9
E	2.3	4.0	2.2	.1								8.7	5.3
ESE	1.4	2.3	.5	.1								4.3	4.5
SE	2.2	2.4	.5	.1								5.1	4.3
SSE	1.9	2.8	1.8	.2								6.7	5.4
S	3.2	7.5	3.6	.5								16.9	5.1
SSW	2.3	2.7	2.6	.2	.1							8.2	5.6
SW	2.2	2.3	1.0	.2	.1							5.9	5.1
WSW	1.1	1.2	.5	.0								2.8	4.8
W	1.1	.9	.5									2.5	4.7
WNW	.4	.6	.2		.0							1.3	3.6
NW	.5	.8	.5	.1								2.0	5.3
NNW	.2	.8	.0									1.1	4.5
VARBL													
CALM												23.3	
	24.4	32.4	17.0	2.5	.3							100.0	4.0

TOTAL NUMBER OF OBSERVATIONS 2046

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	1.5	.6	.1								3.5	4.9
NNE	1.8	1.6	.7	.2		.1						4.3	4.8
NE	1.5	1.3	.6	.1	.1							3.4	4.8
ENE	.8	.9	.4	.3								2.4	5.7
E	1.8	1.2	.5	.1	.1							3.6	4.3
ESE	.6	1.0	.2	.1	.1	.1						1.9	5.4
SE	1.5	.6	.2	.2								2.4	4.1
SSE	1.3	.9	.5	.2								2.9	4.8
S	3.5	3.5	1.4									8.5	4.1
SSW	2.8	4.4	2.5	.2								10.0	5.2
SW	4.9	3.9	2.7	.5	.1							11.6	5.2
WSW	1.6	2.2	2.0	.3								6.1	5.6
W	1.7	1.7	.7	.1								4.2	4.5
WNW	.9	.8	.4									1.8	4.6
NW	.9	.6	.4		.1							2.0	4.9
NNW	.2	.6	.3									1.2	4.9
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	30.1	
	26.6	26.9	14.0	2.1	.3	.1						100.0	3.4

TOTAL NUMBER OF OBSERVATIONS 1889

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

A.L WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - ..	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	2.8	.7	.1								5.2	4.7
NNE	2.0	2.3	1.0	.3								5.6	5.0
NE	2.4	1.2	.8	.2								4.6	4.4
ENE	.9	.8	.3	.2								2.3	5.3
E	1.3	.9	.3	.1								2.6	4.2
ESE	.5	.3	.1									1.0	4.2
SE	.7	.6	.2	.2	.1							1.7	5.4
SSE	.4	.5	.2	.2								1.2	5.1
S	1.7	1.6	1.0	.1								4.4	4.6
SSW	2.0	2.7	1.2	.1								6.0	4.9
SW	4.0	4.1	2.4	.2								10.8	4.8
WSW	2.3	4.0	1.8	.3								8.5	5.2
W	2.6	3.4	1.1	.2								7.3	4.6
WNW	.9	.6	.4	.1								2.0	4.4
NW	1.0	.7	.3									2.6	3.6
NNW	.9	.8	.5									2.2	4.7
VARBL													
CALM												32.1	
	26.1	27.5	12.4	2.0	.1							100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 1915

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS)

0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	2.7	.9	.6	.1							6.5	5.4
NNE	1.8	3.6	2.4	.7								8.5	6.0
NE	2.0	2.3	2.2	.6								7.1	5.9
ENE	1.2	1.7	.8	.1								3.8	5.2
E	.9	1.1	.6	.3	.1							2.9	5.9
ESE	.3	.4	.4	.1								1.2	5.7
SE	.6	.5	.2	.1								1.3	4.7
SSE	.5	.8	.3	.2	.1							1.8	5.3
S	.6	1.3	.7	.1								2.6	5.5
SSW	1.5	1.9	2.1	.4								5.9	6.0
SW	2.4	3.4	3.2	.6								9.5	5.9
WSW	1.9	4.8	3.4	.7								10.7	6.1
W	2.9	4.6	2.9	.5								10.9	5.4
WNW	1.4	1.5	1.4	.3								4.5	5.8
NW	1.2	1.0	.7	.1								2.9	4.8
NNW	1.0	1.2	.4	.1								2.5	4.7
VARBL													
CALM												17.2	
	22.3	32.7	22.6	5.0	.2							100.0	4.7

TOTAL NUMBER OF OBSERVATIONS 1968

USAFETAC FORM 0-8 64 5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.8	1.5	.5	.2							5.0	6.9
NNE	1.0	1.8	1.9	.7	.1							5.5	6.7
NE	.6	1.8	2.4	.8	.1							5.7	7.6
ENE	.6	1.0	3.0	1.1	.3							5.9	8.5
E	.7	2.1	3.0	1.2								7.0	7.7
ESE	.4	1.0	1.7	.8	.1							4.0	8.0
SE	.6	1.3	.7	.4								3.1	6.3
SSE	1.0	1.1	1.3	.6								4.0	6.5
S	1.3	1.6	1.5	.3	.1							4.8	6.1
SSW	1.0	1.7	1.5	.4								4.6	6.4
SW	1.3	1.8	2.9	.9								7.1	7.1
WSW	1.3	3.0	3.4	1.2	.1							9.0	7.1
W	2.4	4.7	4.8	1.2	.1							13.3	6.5
WNW	1.1	2.7	3.0	.9								7.7	7.1
NW	1.0	2.1	1.7	.6								5.3	6.4
NNW	.8	1.8	.8	.3								3.7	5.6
VARBL													
CALM												4.4	
	16.2	31.9	35.1	11.6	.8							100.0	6.6

TOTAL NUMBER OF OBSERVATIONS 1968

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS)

1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	1.9	1.2	.5	.1							4.2	6.7
NNE	.6	1.3	1.7	.3	.1							4.0	7.2
NE	.2	.9	1.4	.5								3.0	7.7
ENE	.1	.9	2.2	1.3	.3	.1						4.9	9.9
E	.9	2.1	4.9	2.5	.2							10.5	8.6
ESE	.2	1.4	4.9	1.3	.1	.1						8.1	8.7
SE	.5	1.6	3.8	1.2	.1							7.2	8.2
SSE	.3	1.7	5.0	2.0	.2							9.1	8.9
S	.7	2.4	3.5	.8	.1							7.5	7.4
SSW	.7	.9	2.0	.7	.1							4.4	7.8
SW	.7	1.3	2.5	1.4	.1							5.9	8.2
WSW	.6	1.5	2.5	1.0	.2							6.2	8.1
W	1.7	3.0	3.4	1.7	.1							9.8	7.2
WNW	.7	1.9	1.8	1.3	.2							5.9	7.8
NW	.6	1.4	1.7	.5								4.2	7.0
NNW	.5	1.0	1.4	.2	.1							3.1	6.6
VARBL													
CALM												1.8	
	9.5	25.4	44.2	17.1	1.7	.2						100.0	7.8

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.7	.8	.2	.2							2.3	7.4
NNE	.2	.6	.7	.3	.1							1.8	7.6
NE	.5	.5	.8	.2	.1	.1						2.2	7.5
ENE	.4	.7	1.2	1.1	.1	.1						3.5	9.4
E	.3	1.2	5.7	2.3	.2	.1						9.6	9.4
ESE	.3	2.1	6.2	1.4	.1							10.1	8.4
SE	.2	2.8	7.3	2.5	.2							12.9	8.7
SSE	.9	3.4	9.9	4.5	.1							18.8	8.9
S	.6	2.7	5.1	2.4								10.7	8.4
SSW	.1	.9	2.0	.8								3.8	8.5
SW	.4	.8	1.4	1.0	.2							3.8	9.0
WSW	.3	.8	1.6	1.1	.2			.1				3.9	9.7
W	.9	1.7	2.0	1.3		.1						6.0	7.6
WNW	.2	.8	1.5	.9	.1							3.4	8.6
NW	.3	.4	.8	.7	.1	.1						2.4	9.7
NNW	.4	.8	1.3	.2								2.7	6.7
VARBL													
CALM												2.0	
	6.1	20.9	48.4	20.7	1.5	.3		.1				100.0	8.4

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-66,68-69 (YEARS) | JUN (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	.6	.7	.2								2.6	5.5
NNE	.2	.4	.7	.4	.1							1.8	8.3
NE	.2	.6	.6	.2								1.3	7.2
ENE	.3	.8	1.3	.5	.2							3.1	8.5
E	1.1	3.7	3.9	.5								9.2	6.5
ESE	1.3	3.5	2.8	.4	.1							8.3	6.1
SE	2.3	4.7	3.4	.4								10.8	5.8
SSE	2.6	5.7	6.9	1.4	.1							16.7	6.8
S	3.5	6.9	7.3	1.0	.1							18.7	6.3
SSW	1.0	2.0	2.7	.4	.1							6.1	6.7
SW	.8	1.6	1.9	.6	.1							5.1	7.1
WSW	.3	1.0	1.2	.5	.1							3.2	7.4
W	.4	1.4	.7	.1								2.5	5.9
WNW	.4	.9	.5	.3	.1							2.1	6.5
NW	.2	.6	.5	.2								1.5	6.9
NNW	.3	.4	.4	.2	.1							1.3	7.1
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	5.6	
	16.2	34.6	35.7	7.1	.8							100.0	6.2

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824	SAVANNAH GEORGIA/HUNTER AAF	48-66,68-69	JUN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

2100-2300
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.5	.2	.1								1.6	4.1
NNE	.9	.7	.7	.2								2.5	5.9
NE	1.0	1.2	.4		.1							2.6	4.9
ENE	.8	1.3	.8	.4								3.2	6.2
E	2.2	2.7	1.4	1		.1						6.5	5.1
ESE	1.5	2.2	.2			.1						4.0	4.2
SE	3.0	2.5	.5	.1								6.1	4.1
SSE	.3	2.6	.9	.3								6.1	4.8
S	5.6	7.5	3.4	.4								16.8	4.9
SSW	2.9	4.7	2.9	.4								10.8	5.6
SW	2.2	3.5	1.9	.5								8.1	5.5
WSW	.7	1.7	1.2	.3								4.0	6.0
W	.5	1.3	.5	.1								2.3	5.2
WNW	.3	.2	.3									.8	5.1
NW	.4	.4	.3	.1								1.2	5.1
NNW	.3	.4	.2									.8	5.0
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	22.4	
	25.4	33.6	15.7	2.8	.1	.2						100.0	4.0

TOTAL NUMBER OF OBSERVATIONS 1890

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	1.3	.4									3.2	4.1
NNE	1.3	1.4	.3	.1								3.1	4.2
NE	1.7	.8	.5	.1								3.1	4.1
ENE	1.0	.3	.4									1.6	4.3
E	1.6	1.1	.4	.1								3.2	4.0
ESE	.9	.5	.2									1.6	3.8
SE	1.1	.8	.2									2.0	3.8
SSE	.7	.7	.4									1.8	4.5
S	3.0	3.8	1.1	.1								8.0	4.5
SSW	3.5	5.5	3.3	.2								12.5	5.1
SW	3.4	5.6	2.5	.8								12.3	5.4
WSW	2.2	3.4	2.1	.2								7.9	5.1
W	1.9	2.6	.8									5.3	4.5
WNW	.4	.3	.1									.8	3.6
NW	.3	.3										.6	3.7
NNW	.5	.4	.2	.1								1.1	4.6
VARBL													
CALM												31.9	
	25.1	28.8	12.7	1.5								100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 1952

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	1.9	.3	.1								4.2	4.0
NNE	2.6	1.8	.6	.1								5.1	4.2
NE	1.8	.6	.6	.2								3.2	4.6
ENE	.8	.6	.3	.1								1.7	4.5
E	.4	.7	.2									1.7	3.9
ESE	.3	.5										.8	3.7
SE	.5	.5	.2									1.2	4.1
SSE	.6	.7	.1	.1								1.4	4.2
S	2.2	1.6	.9									4.7	4.3
SSW	2.5	3.8	1.7	.1								8.2	4.9
SW	4.5	6.3	2.1	.5								13.4	5.0
WSW	3.1	5.5	1.7	.3								10.6	4.8
W	2.7	3.1	.4									6.2	4.0
WNW	.6	.5	.2									1.2	3.7
NW	.6	.6	.2									1.4	4.1
NNW	.9	.7										1.6	3.4
VARBL													
CALM												33.7	
	26.5	29.2	9.3	1.3								100.0	3.0

TOTAL NUMBER OF OBSERVATIONS 1979

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824	SAVANNAH GEORGIA/HUNTER AAF	48-69	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	2.4	.8	.0								5.4	4.5
NNE	1.9	2.0	1.3	.3								5.5	5.3
NE	1.7	1.7	.9	.2								4.6	5.3
ENE	.6	1.2	.5	.1								2.4	5.3
E	.5	.6	.4	.1	.0							1.7	5.9
ESE	.5	.5	.1									1.2	4.2
SE	.5	.2	.0									.8	3.5
SSE	.5	.4	.4	.1								1.4	5.5
S	1.4	1.4	.8									3.6	4.7
SSW	1.0	2.7	1.6	.1								5.4	5.5
SW	2.7	5.8	4.3	.7								13.5	6.0
WSW	3.2	6.5	4.0	.6	.0							14.3	5.9
W	2.9	5.9	3.3	.4								12.5	5.5
WNW	1.2	1.0	.6									2.9	4.5
NW	.8	.6	.1									1.8	4.0
NNW	.5	.7	.3	.0								1.6	5.1
VARBL													
CALM												21.6	
	22.1	33.6	19.8	2.9	.1							100.0	4.2

TOTAL NUMBER OF OBSERVATIONS 2031

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.5	1.5									4.0	5.4
NNE	1.1	1.5	1.0	.4								4.0	6.0
NE	.9	.9	1.6	.3								3.7	6.7
ENE	.4	1.2	1.4	.5	.1							3.7	7.6
E	.7	1.8	2.0	.4	.1	.0						5.1	7.1
ESE	.5	1.1	1.1	.3	.0							3.2	6.7
SE	.5	1.3	.8	.1								2.8	6.1
SSE	.4	1.1	1.4	.3								3.3	6.8
S	1.6	1.8	1.6	.2								5.2	5.6
SSW	1.0	3.1	2.2	.3								6.7	6.2
SW	1.4	4.2	3.4	1.2	.0							10.3	6.7
WSW	1.5	4.8	4.9	1.0	.1							12.3	6.9
W	2.3	7.4	6.4	.8	.1							17.0	6.5
WNW	1.4	2.6	2.0	.3								6.3	5.7
NW	.9	1.7	.6	.2								3.5	5.5
NNW	.9	1.1	.3	.1								2.5	5.3
VARBL													
CALM												6.5	
	16.8	37.1	32.2	6.8	.5	.0						100.0	6.0

TOTAL NUMBER OF OBSERVATIONS 2030

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS)

1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	1.2	.9	.3								2.9	6.4
NNE	.3	.9	.8	.3								2.6	6.7
NE	.5	1.0	1.4	.2								3.2	6.8
ENE	.5	.7	1.1	.4	.1							2.9	7.6
E	1.0	2.3	4.2	1.7	.2	.1						9.6	8.4
ESE	.3	1.3	2.6	1.3								5.9	8.1
SE	.8	2.1	3.6	1.1	.0							7.7	7.6
SSE	.3	2.0	4.6	2.7	.2							9.8	9.1
S	1.2	3.6	3.4	1.1	.1							9.4	7.1
SSW	.5	2.1	2.7	.6	.0							6.1	7.3
SW	1.2	3.0	2.6	1.1	.2	.0						8.2	7.1
WSW	.6	3.4	3.4	.8	.1							8.4	7.1
W	1.3	4.1	4.2	1.3								10.9	7.1
WNW	.6	1.2	2.4	.4	.0							4.7	7.2
NW	.3	1.0	1.2	.1	.0							2.7	7.0
NNW	.2	.6	.7	.1								1.7	6.4
VARBL													
CALM												3.3	
	10.7	30.7	40.1	13.9	1.1	.2						100.0	7.3

TOTAL NUMBER OF OBSERVATIONS 2016

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.7	.9	.2	.0							2.3	6.8
NNE	.1	.5	.9	.1			.0					1.7	7.8
NE	.2	.4	.8	.5								2.0	8.4
ENE	.1	.7	.9	.6	.1	.0						2.6	9.0
E	.3	1.5	4.3	1.7	.3							8.2	9.1
ESE	.4	2.5	3.8	1.2								7.9	7.7
SE	.7	2.4	6.3	2.3	.0							11.7	8.4
SSE	.9	3.1	10.5	5.0	.4							20.0	9.1
S	1.2	3.3	7.7	2.5	.0	.0						14.8	6.2
SSW	.4	1.4	1.8	1.0	.1							4.7	8.1
SW	.6	1.1	2.5	.8	.0							5.0	7.9
WSW	.4	1.0	2.5	.8	.0	.0						4.9	8.3
W	.5	2.2	2.5	.7		.0						6.0	7.3
WNW	.2	1.0	.9	.1		.0						2.4	6.9
NW	.2	.9	.5	.2								1.8	6.4
NNW	.2	.4	.5	.2								1.4	7.2
VARBL													
CALM												2.4	
	7.3	23.3	47.4	18.1	1.2	.2	.0					100.0	8.1

TOTAL NUMBER OF OBSERVATIONS 2015

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1000-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2	.5	.4	.1								1.1	5.8
NNE	.4	.4	.4	.2								1.3	6.2
NE	.6	.7	.9	.1								2.3	6.0
ENE	.3	.7	1.3	.4	.2							2.8	8.1
E	1.3	2.3	1.9	.7		.1						6.2	6.5
ESE	1.8	3.2	1.4	.3								6.8	5.3
SE	2.3	4.3	2.3	.2								9.1	5.2
SSE	1.7	5.3	7.2	1.5	.1							15.8	7.0
S	4.0	9.1	7.7	.9		.1						21.9	6.1
SSW	1.2	3.0	3.2	.5								7.8	6.5
SW	.6	2.2	2.5	.7	.2							6.2	7.5
WSW	.8	1.3	1.3	.4								3.8	6.4
W	.8	1.5	1.0	.3								3.6	5.7
WNW	.4	.8	.4	.1								1.5	5.3
NW	.6	.4	.5		.1							1.5	5.6
NNW	.2	.3	.2									.6	5.3
VARBL													
CALM												7.7	
	17.2	35.9	32.5	6.2	.5	.1						100.0	5.8

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-66,68-69 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	.7	.5	.1								2.2	4.7
NNE	.5	.6	.4									1.5	5.0
NE	1.0	1.1	.7	.2								2.9	5.0
ENE	1.0	.8	.9									2.7	5.3
E	1.9	1.1	.7	.1								3.3	4.3
ESE	.9	1.1	.1									2.2	3.8
SE	2.5	1.5	.2									4.2	3.5
SSE	1.7	1.8	.6	.1								4.2	4.4
S	5.5	8.4	3.0	.1								17.0	4.6
SSW	3.2	5.1	4.4	.7								13.3	5.9
SW	2.1	3.4	2.4	.5								8.3	5.6
WSW	1.7	2.7	1.6	.3								6.3	5.3
W	1.9	2.4	.6	.1								4.9	4.3
WNW	.3	.4	.2	.1								.9	4.9
NW	.3	.3										.5	4.1
NNW	.2	.3	.1	.1								.6	5.3
VARBL													
CALM												24.6	
	25.7	31.7	16.1	1.9								100.0	3.7

TOTAL NUMBER OF OBSERVATIONS 1951

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	2.4	.6	.1								5.1	4.3
NNE	2.2	2.4	1.2	.2								5.9	4.8
NE	1.8	1.4	1.7									4.9	5.3
ENE	1.0	1.0	.4	.1								2.4	4.6
E	1.3	.7	.6	.1				.1				2.8	5.0
ESE	.7	.5	.1				.1					1.3	4.6
SE	.4	.3	.1	.1				.1				1.4	4.8
SSE	.7	.4	.3	.1								1.3	4.5
S	3.1	2.0	1.2	.2								6.5	4.5
SSW	3.0	3.3	1.6	.2								8.1	4.7
SW	4.1	3.3	1.7	.2	.1							9.4	4.7
WSW	3.4	2.7	1.4	.2								7.6	4.5
W	1.9	1.9	.6	.1								4.5	4.1
WNW	.6	.4	.2	.1								1.2	4.9
NW	.8	.5	.2	.1								1.5	4.1
NNW	.9	.5	.4	.1	.1							1.9	5.1
VARBL													
CALM												34.3	
	28.6	23.5	12.0	1.4	.2		.1	.1				100.0	3.0

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824	SAVANNAH GEORGIA/HUNTER AAF	48-69	AUG
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0300-0500
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.3	3.5	1.1	.2								8.0	4.4
NNE	2.7	3.1	1.5	.3								7.6	5.0
NE	1.9	1.3	.9	.1								4.1	4.6
ENE	.6	1.0	.5	.1								2.2	5.3
E	.9	.7	.3	.1	.1		.1					2.0	5.3
ESE	.2		.3	.1								.5	6.6
SE	.4	.1	.2					.1				.6	7.1
SSE	.6	.3	.2			.1						1.1	4.9
S	2.0	1.3	.7									3.9	4.1
SSW	2.4	1.7	.9	.2								5.1	4.4
SW	3.9	3.6	1.6	.2								9.2	4.6
WSW	2.4	3.2	1.5	.2								7.3	4.9
W	2.3	2.1	.6	.1								5.1	4.0
WNW	1.0	.4	.2									1.5	3.9
NW	1.2	.4	.2	.1								1.8	3.8
NNW	1.7	.4	.5	.1								2.6	4.1
VARBL													
CALM												37.3	
	27.3	22.8	11.0	1.3	.1	.1	.1	.1				100.0	2.9

TOTAL NUMBER OF OBSERVATIONS 1979

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.8	3.5	1.5	.3								8.1	4.9
NNE	3.0	4.0	2.7	.4								10.1	5.4
NE	1.7	2.6	2.1	.4								6.8	5.9
ENE	.8	1.1	.5	.2								2.7	5.8
E	.9	.3	.4									1.6	4.2
ESE	.3	.2	.1									.6	3.9
SE	.3	.2	.1	.1								.8	6.1
SSE	.3	.2	.2	.1	.0	.0						.9	7.4
S	1.4	.8	.5			.0						2.9	4.7
SSW	1.7	1.7	.8	.1								4.3	4.7
SW	3.4	3.4	1.4	.4								8.6	4.7
WSW	2.7	4.3	1.9	.2								9.1	5.0
W	3.5	4.4	2.1	.3								10.3	4.9
WNW	1.0	1.3	.6									2.9	4.7
NW	.9	.5	.2	.1								1.9	4.8
NNW	1.3	.9	.3	.0	.1							2.7	4.9
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	25.9	
	26.0	29.7	15.4	2.8	.1	.1						100.0	3.8

TOTAL NUMBER OF OBSERVATIONS 2033

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.6	2.2	1.7	.5								6.0	6.0
NNE	.8	2.8	2.8	.2								6.6	6.4
NE	1.0	2.0	2.7	1.1	.1	.0						6.9	7.6
ENE	.9	2.2	2.2	1.2								6.5	7.5
E	1.2	1.7	2.0	.7	.0							5.7	6.8
ESE	.5	.8	.8	.1	.0							2.4	6.4
SE	.6	.7	.5	.1	.0							2.0	6.2
SSE	.5	1.0	.5	.4	.1	.0						2.7	7.2
S	1.4	2.6	1.0	.3	.0		.0					5.5	5.8
SSW	.9	2.3	1.1	.2								4.5	5.7
SW	1.7	4.3	2.3	.7								8.9	5.9
WSW	1.6	3.4	2.4	.3								7.7	5.7
W	3.6	6.7	3.4	.8								14.6	5.5
WNW	1.9	2.4	1.0	.8	.0							6.1	5.7
NW	1.2	1.4	.8	.1	.1							3.7	5.5
NNW	1.4	1.3	.6	.1	.1							3.5	5.1
VARBL													
CALM												6.8	
	20.8	37.8	26.0	7.8	.6	.1	.0					100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 2034

USAFETAC FORM JUL 64 0-8 5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.7	1.1	.4								4.1	6.2
NNE	.4	1.2	1.5	.2	.1							3.5	7.0
NE	.3	1.3	1.9	1.3	.1	.0						5.0	8.8
ENE	.5	1.7	2.8	1.5	.2							6.8	8.6
E	1.0	3.0	4.1	2.1	.0	.0						10.2	8.0
ESE	.9	2.1	3.2	1.2	.1							7.2	7.7
SE	1.1	2.1	2.1	.7								6.0	6.8
SSE	.6	2.1	2.8	1.6	.2							7.4	8.2
S	2.0	3.6	3.1	1.1	.1	.1	.0					10.0	6.9
SSW	1.1	1.3	1.9	.3								4.9	6.4
SW	1.1	2.4	2.1	.4		.1						6.2	6.5
WSW	.6	2.5	2.6	.4	.1							6.2	7.1
W	1.2	3.3	3.0	.7	.0							8.2	6.4
WNW	.8	2.0	1.6	.5	.1							5.0	6.6
NW	1.0	.8	.9	.4	.0							3.2	6.6
NNW	.2	.9	1.0	.1	.1							2.4	7.7
VARBL													
CALM												3.6	
	13.6	32.3	35.7	13.1	1.4	.3	.0					100.0	7.0

TOTAL NUMBER OF OBSERVATIONS 2022

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.8	.9	.2								2.4	6.2
NNE	.2	.9	.8	.3	.1							2.4	7.6
NE	.2	.6	1.3	.7	.1							2.9	8.9
ENE	.0	1.0	2.2	1.1	.2							4.6	9.4
E	.6	2.4	6.6	2.4	.0							12.0	8.5
ESE	.3	2.6	4.7	1.0		.0						8.7	7.9
SE	1.3	4.0	5.8	1.2	.2							12.6	7.5
SSE	.7	4.2	8.4	3.5	.2							17.1	8.5
S	1.1	3.7	6.8	1.2		.0						12.9	7.3
SSW	.6	1.3	1.4	.4		.0						3.8	7.2
SW	.4	1.4	1.3	.3	.0	.0						3.6	7.2
WSW	.2	1.8	1.2	.3	.0							3.6	6.7
W	.3	1.8	1.2	.5	.1							4.2	7.0
WNW	.4	.7	1.1	.3			.0					2.7	7.5
NW	.1	1.0	.5	.3								2.0	7.0
NNW	.4	.7	.8	.2						.0		2.3	7.4
VARBL													
CALM												2.3	
	7.4	29.0	45.2	14.2	1.2	.2	.0			.0		100.0	7.7

TOTAL NUMBER OF OBSERVATIONS 2022

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-69 (YEARS) | AUG (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.2	.7	.2	.1							2.8	6.2
NNE	.6	.9	.6	.4								2.5	6.3
NE	1.1	1.4	1.1	.4	.3							4.2	6.7
ENE	.9	1.4	1.9	.4	.1	.1						4.7	7.1
E	2.0	3.8	2.6	.6								9.0	5.8
ESE	2.1	2.8	1.2	.2	.1	.1						6.5	5.5
SE	2.8	3.8	2.0	.2								8.8	5.0
SSE	2.8	5.4	3.5	.9								12.6	5.9
S	4.1	9.7	4.9	.6								19.3	5.5
SSW	1.1	2.4	1.9	.5								5.9	6.2
SW	1.1	1.9	1.1	.2		.1						4.4	5.7
WSW	.9	.5	1.0	.1								2.5	5.5
W	.7	.9	.9	.2								2.7	5.8
WNW	.4	.6	.3									1.2	4.8
NW	.3	.5	.3	.2								1.3	6.5
NNW	.3	.4	.1	.2								.9	5.4
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	10.6	
	22.0	37.5	24.1	5.1	.5	.2						100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 1957

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	.6	.4	.1								2.4	4.5
NNE	1.6	1.2	1.1	.1								4.0	4.9
NE	2.2	2.3	1.4	.2								6.0	4.9
ENE	1.2	1.5	.8	.3								3.7	5.5
E	2.5	1.5	.6	.1								4.7	4.3
ESE	1.3	1.0	.2	.1								2.5	4.1
SE	2.1	1.1	.3			.1	.1					3.6	4.6
SSE	1.8	1.2	1.0	.2	.1							4.2	5.0
S	5.0	4.8	2.5	.2								12.4	4.6
SSW	3.3	4.1	1.8	.2								9.5	4.7
SW	2.5	2.7	1.4	.1								6.7	4.8
WSW	1.1	1.6	1.1	.1		.1						4.0	5.5
W	1.2	1.5	.4									3.1	4.3
WNW	.7	.3	.2									1.2	4.0
NW	.5	.5	.3	.3	.1	.1						1.6	7.3
NNW	.4	.3	.3	.1								1.0	5.3
VARBL													
CALM												29.3	
	28.6	26.0	13.7	1.9	.1	.2	.1					100.0	3.4

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.8	3.3	2.1	.3	.1							8.5	5.4
NNE	4.4	4.7	4.1	1.0	.1	.2						14.5	6.0
NE	2.4	3.6	1.9	.7	.1							8.7	5.6
ENE	1.2	1.7	1.0	.1	.2							4.1	5.7
E	1.4	1.4	.5	.1								3.4	4.5
ESE	.4	.3	.1	.1								1.0	4.4
SE	.8	.5	.5	.1								1.8	5.1
SSE	.7	.6	.2	.2								1.6	5.1
S	1.3	.8	.5	.1								2.7	4.5
SSW	1.8	1.0	1.1	.1								4.0	4.9
SW	2.1	1.4	.6									4.1	3.9
WSW	1.2	.8	.5	.2								2.6	4.8
W	1.6	1.3	.3									3.2	4.1
WNW	1.0	.7	.3	.1								2.0	4.4
NW	.6	.2	.2	.1								1.1	4.5
NNW	1.1	.8	.6	.1								2.5	4.9
VARBL													
CALM												34.1	
	24.7	23.3	14.2	3.1	.4	.2						100.0	3.4

TOTAL NUMBER OF OBSERVATIONS 1935

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS)

0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.2	4.6	2.2	.8								10.8	5.4
NNE	4.3	5.9	4.8	1.5	.3							16.7	6.2
NE	3.7	4.3	2.7	.6								11.2	5.4
ENE	.9	.7	.7									2.3	4.7
E	.7	1.5	.5	.1	.1	.1						2.9	6.2
ESE	.2	.3	.3	.1								1.0	5.2
SE	.5	.4	.2	.2								1.2	5.6
SSE	.4	.3	.3									.9	4.8
S	.5	.4	.4									1.2	4.8
SSW	.9	1.1	.7									2.7	4.9
SW	1.6	1.2	.7	.1								3.6	4.6
WSW	1.3	2.0	.3	.1								3.7	4.4
W	1.4	1.1	.4	.1								2.9	4.2
WNW	.8	.7	.4	.1								1.9	4.8
NW	.8	.3	.1	.3								1.5	5.1
NNW	1.3	1.9	.1	.1								2.5	4.2
VARBL													
CALM	X	X	X	X	X	X	X	X	X	X	X	33.0	
	22.3	25.8	14.6	3.9	.4	.1						100.0	3.6

TOTAL NUMBER OF OBSERVATIONS 1959

USAFETAC FORM XR 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.9	4.8	2.9	.6								13.1	5.1
NNE	4.1	8.2	5.1	2.4	.2							20.0	6.5
NE	2.5	5.1	3.6	1.5								12.7	6.4
ENE	.9	1.5	1.5	.1								4.0	5.7
E	.9	1.2	.4		.1	.1						2.7	5.4
ESE	.6	.3	.3	.1								1.2	5.1
SE	.5	.2	.2	.3								1.1	6.9
SSE	.4	.3	.1									.7	3.4
S	.8	.4	.3		.1							1.5	4.7
SSW	1.1	1.0	.3	.1								2.4	4.5
SW	1.0	1.3	.8	.1								3.1	5.1
WSW	1.3	1.6	.7									3.5	4.6
W	1.5	2.6	.8									4.9	4.5
WNW	.5	.8	.6	.2								2.1	5.1
NW	1.1	.9	.2				.1					2.1	4.6
NNW	1.4	.9	.2	.1		.1	.1					2.5	4.7
VARBL													
CALM												22.4	
	23.3	30.7	17.7	5.3	.3	.2	.1					100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 1972

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	2.8	2.4	1.1								7.9	6.7
NNE	1.6	4.6	3.8	2.3	.4	.1						12.8	7.7
NE	1.3	4.8	5.5	3.3	.4							15.3	8.2
ENE	1.2	4.0	6.5	1.8	.1							13.6	7.6
E	1.1	2.5	3.9	.8	.2							8.6	7.4
ESE	.5	1.7	1.3	.2								3.6	6.4
SE	.3	.6	.6	.3								1.9	6.4
SSE	.6	.6	1.0	.4								2.4	7.1
S	.6	1.0	.6	.2								2.2	5.9
SSW	.4	1.0	.8									2.2	5.8
SW	1.0	1.5	.9	.2								3.4	5.3
WSW	.7	1.8	1.0	.1								3.6	5.9
W	1.9	3.1	2.0	.3								7.3	5.4
WNW	1.0	1.7	1.0	.2		.1						3.8	6.0
NW	.8	1.1	1.0	.1		.1			.1			3.0	6.7
NNW	1.2	1.6	.6	.1								3.5	4.6
VARBL													
CALM												4.9	
	15.7	34.3	32.6	11.3	1.0	.2			.1			100.0	6.6

TOTAL NUMBER OF OBSERVATIONS 1973

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13024 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	2.1	1.9	1.0	.1							6.0	6.9
NNE	.7	1.7	2.3	1.5	.7	.1						7.0	9.2
NE	.5	1.8	4.6	2.4	.3							9.6	9.0
ENE	1.0	2.5	5.7	2.8	.2							12.2	8.7
E	.7	4.4	7.9	3.8	.4	.1						17.3	8.7
ESE	.5	2.9	3.4	.7	.1							7.6	7.4
SE	.4	1.8	2.2	.5								4.8	7.1
SSE	.4	1.9	2.8	1.2	.2							6.4	8.4
S	.6	1.6	1.9	.3	.1							4.4	6.8
SSW	.3	.8	.7	.2	.1							2.0	6.7
SW	.3	1.2	.9	.2	.1							2.5	6.8
WSW	.6	1.1	.7	.3	.1	.1						2.7	6.8
W	.9	2.2	2.0	.4		.1	.1					5.6	6.6
WNW	1.1	1.0	1.5	.3								3.9	6.3
NW	.3	1.3	1.0									2.7	5.7
NNW	.6	.9	.8	.4								2.6	6.5
VARBL													
CALM												2.6	
	9.9	29.3	40.2	15.8	2.0	.2	.1					100.0	7.7

TOTAL NUMBER OF OBSERVATIONS 1968

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	1.4	1.6	.7	.1							4.4	7.4
NNE	.7	1.6	2.6	1.3	.2	.1	.1					6.5	8.7
NE	.4	1.9	3.1	1.8	.2	.1	.1					7.5	9.1
ENE	.5	2.5	4.6	2.2	.2	.1						10.1	8.7
E	.8	5.3	8.3	4.1	.2	.1						18.6	8.4
ESE	.7	4.2	5.2	.8	.2							11.1	7.5
SE	.9	3.0	4.5	.8								9.2	7.0
SSE	.4	2.7	4.2	1.1	.1							8.4	7.8
S	.6	1.9	2.4	.5								5.4	7.0
SSW	.4	.7	.6									1.7	5.3
SW	.3	.8	.6	.3	.1							2.0	6.9
WSW	.4	.6	.7	.3		.2						2.1	7.7
W	.8	1.5	1.8	.1		.1						4.3	6.5
WNW	.3	.3	.6	.3	.1							2.0	7.2
NW	.4	.7	.9	.3								2.2	6.5
NNW	.3	.9	1.1	.2								2.4	7.0
VARBL													
CALM												2.1	
	8.2	30.7	42.7	14.7	1.1	.4	.1					100.0	7.7

TOTAL NUMBER OF OBSERVATIONS 1968

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS)

1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.0	1.6	.3								4.1	6.3
NNE	.6	2.3	1.8	1.1	.3	.1						6.2	8.0
NE	1.8	2.5	2.7	1.0	.1	.1						8.3	6.9
ENE	2.1	4.5	3.4	.8	.1							10.8	6.2
E	4.2	5.4	3.4	.7	.2							13.7	5.6
ESE	3.5	3.4	1.5	.1	.1	.1						8.5	4.6
SE	2.9	3.8	.5	.2								7.3	4.2
SSE	2.1	2.9	1.5	.3								6.8	5.2
S	2.6	3.6	1.3		.1							7.4	4.6
SSW	.7	.8	.4	.1								2.0	4.9
SW	.5	1.1	.3	.1	.1							2.1	5.8
WSW	.3	.3	.2			.2						.8	5.3
W	.7	1.0	.5	.2								2.3	5.3
WNW	.2	.8	.3									1.2	5.5
NW	.7	.5	.1	.2								1.5	5.2
NNW	.7	.3	.3	.2								1.4	5.3
VARBL													
CALM												15.6	
	24.5	34.0	19.8	5.1	.8	.3						100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 1938

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	1.2	1.9	.3								5.3	6.0
NNE	2.3	3.1	3.3	1.2	.2	.1						10.2	6.9
NE	3.2	3.7	2.8	.5	.1							10.2	5.4
ENE	2.1	2.8	2.0	.3	.1							7.3	5.6
E	3.1	2.6	.7	.2								6.6	4.3
ESE	1.4	.9	.2	.1	.1	.1						2.7	4.7
SE	2.0	.5	.4	.2								3.0	3.9
SSE	1.0	1.1	.7	.2								3.0	5.4
S	2.1	2.7	.9									5.7	4.5
SSW	1.7	1.3	.5	.1								3.5	4.2
SW	1.0	1.4	.4	.2								3.0	5.2
WSW	.7	.6	.1	.1								1.4	4.0
W	.9	1.0	.3									2.2	4.1
WNW	.5	.7	.3									1.4	4.7
NW	.3	.3	.4	.2								1.4	6.3
NNW	.6	.5	.4									1.4	5.0
VARBL													
CALM												31.6	
	24.7	24.3	15.1	3.6	.4	.2						100.0	3.6

TOTAL NUMBER OF OBSERVATIONS 1937

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.4	3.9	2.6	.2								10.2	5.1
NNE	3.5	4.6	5.6	2.1								15.7	6.7
NE	3.2	3.7	3.3	.8	.2	.0						11.3	6.1
ENE	.9	1.3	.7	.2				.1				3.2	6.4
E	.4	.5	.2	.1		.0						1.3	6.0
ESE	.5	.4	.2									1.1	4.3
SE	.5	.2	.0									.7	3.3
SSE	.3	.2	.2	.1								.9	6.0
S	.6	.5	.2	.1	.1							1.6	5.8
SSW	.8	.8	.4	.1								2.1	5.0
SW	1.4	1.1	.1	.1								2.8	4.2
WSW	1.2	1.2	.4									2.9	4.3
W	1.8	1.7	.4	.2								4.2	4.6
WNW	.9	.9	.8	.0								2.7	4.9
NW	1.2	1.1	.9	.0								3.3	4.9
NNW	.8	1.1	1.0	.1								3.1	5.9
VARBL													
CALM												33.1	
	21.0	23.3	17.2	4.3	.3	.1		.1				100.0	3.8

TOTAL NUMBER OF OBSERVATIONS 2036

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.8	5.2	3.7	.9	.0							13.6	5.7
NNE	3.6	4.9	6.2	1.9	.0							16.6	6.7
NE	3.6	4.5	2.9	1.0	.1							12.1	5.8
ENE	.6	.9	.2	.3								2.0	5.7
E	.6	.3	.4	.1								1.4	5.4
ESE	.1	.2										.3	3.6
SE	.3	.1	.1		.0							.6	5.3
SSE	.2	.3										.5	4.0
S	.5	.4	.0	.1	.0							1.1	5.1
SSW	.5	.9	.5	.2								2.2	5.9
SW	.6	1.2	.2	.1								2.2	5.2
WSW	1.7	.4	.7									2.8	4.3
W	2.7	1.8	.5	.0								5.0	4.1
WNW	1.4	1.2	.5	.1								3.2	4.6
NW	1.1	1.4	.5	.1								3.0	4.9
NNW	1.0	1.3	1.3	.4	.1							4.1	6.6
VARBL													
CALM												29.1	
	22.3	25.0	17.7	5.5	.4							100.0	4.1

TOTAL NUMBER OF OBSERVATIONS 2036

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) | SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) | 48-69 (YEARS) | OCT (MONTH)

ALL WEATHER (CLASS) | 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.2	5.4	4.4	.8								13.8	5.9
NNE	3.5	6.5	7.2	2.4	.1							19.7	6.9
NE	2.7	4.7	3.9	2.3	.1							13.6	6.8
ENE	.6	1.4	1.0	.4								3.3	6.6
E	.3	.3	.5	.2	.1							1.6	6.8
ESE	.0	.1	.0				.0					.3	8.3
SE	.2	.0	.1	.1								.5	6.3
SSE	.0	.1	.0									.2	5.6
S	.4	.6	.1	.1								1.3	5.6
SSW	.2	.5	.4	.1	.0							1.3	5.5
SW	.9	.7	.6	.0								2.3	5.0
WSW	.9	.9	.7									2.5	4.8
W	2.7	2.4	1.1	.2								6.5	4.7
WNW	1.2	1.0	.3	.0								2.7	4.3
NW	1.4	1.3	.6	.4	.0							3.8	5.4
NNW	1.8	2.0	1.0	.5								5.3	5.5
VARBL													
CALM												21.2	
	20.4	28.2	22.1	7.7	.4		.0					100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 2037

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 40-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	4.2	4.4	1.5	.2							12.0	7.1
NNE	1.1	4.5	6.1	3.7	.0	.0						15.6	8.3
NE	.9	5.0	5.6	4.7	.9	.0						17.1	9.1
ENE	.6	3.4	4.7	2.4	.2	.0						11.3	8.3
E	.8	1.5	2.6	.8								5.6	7.5
ESE	.0	.5	.7	.2	.0							1.6	8.7
SE	.2	.6	.5	.2		.0						1.7	7.5
SSE	.1	.3	.3	.2	.1							1.1	8.9
S	.3	.3	.4	.0								1.3	5.4
SSW		.5	.4	.3	.0							1.3	8.7
SW	.3	.8	.7	.2								2.1	6.3
WSW	.7	1.2	1.2	.7								3.8	7.0
W	1.0	2.6	2.8	.6								7.1	6.6
WNW	.7	1.3	1.1	.4	.1							3.9	6.8
NW	1.3	1.3	1.0	.2	.0							4.1	5.6
NNW	.8	1.9	1.4	1.2	.1							5.4	7.5
VARBL													
CALM												4.9	
	10.8	30.6	34.2	17.3	1.8	.2						100.0	7.4

TOTAL NUMBER OF OBSERVATIONS 2037

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	2.3	3.5	1.8	.2							8.8	7.9
NNE	.5	2.8	3.5	1.8	.1							8.8	8.2
NE	.7	2.7	4.3	3.3	.9	.2						12.0	9.7
ENE	.5	2.9	5.5	3.1	.1	.1						12.3	9.0
E	1.0	3.3	5.8	2.6	.1							12.9	8.2
ESE	.7	1.2	1.4	.8	.0							4.2	7.3
SE	.2	.9	1.4	.3								2.8	7.5
SSE	.4	.8	1.3	.4	.2	.0						3.2	8.2
S	.4	1.3	.9	.2								2.8	6.2
SSW	.3	.6	.5									1.7	6.9
SW	.3	.6	.5	.3	.0							1.8	7.2
WSW	.1	1.0	1.2	.9	.1							3.3	8.8
W	.6	1.7	3.4	1.3	.2							7.3	8.3
WNW	.5	1.4	2.1	.8	.2							5.0	7.9
NW	.5	1.5	2.5	.7	.0							5.2	7.7
NNW	.6	1.6	2.3	.8	.0	.0						5.5	7.7
VARBL													
CALM												2.4	
	8.5	26.7	40.0	19.5	2.5	.4						100.0	8.1

TOTAL NUMBER OF OBSERVATIONS 2036

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	2.3	2.6	.6	.0							6.8	6.9
NNE	.5	1.8	2.3	1.7	.2							6.5	8.5
NE	.6	1.7	3.2	2.6	.3							8.4	9.3
ENE	.8	2.3	4.1	2.4	.3	.1						10.1	8.9
E	1.4	4.5	7.3	2.8	.1							16.1	7.8
ESE	1.1	3.4	3.4	1.1								9.0	6.9
SE	1.7	2.8	1.7	.3								6.5	5.6
SSE	.4	1.8	2.3	.3	.3							5.2	7.5
S	.6	1.2	1.8	.1								3.7	6.4
SSW	.2	.6	.4	.1								1.3	6.2
SW	.1	.3	.6	.0								1.3	6.2
WSW	.2	.6	1.1	.6	.0							2.7	8.2
W	.6	1.8	2.1	1.0								5.6	7.6
WNW	.2	1.4	2.3	.9	.0							4.9	8.1
NW	.4	2.0	1.6	.4								4.5	6.9
NNW	.6	1.9	2.2	.7								5.4	7.4
VARBL													
CALM												2.1	
	10.8	30.6	39.0	16.0	1.4	.1						100.0	7.5

TOTAL NUMBER OF OBSERVATIONS 2034

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	1.5	1.3	.7								4.2	7.0
NNE	1.0	1.8	2.7	1.4	.2							7.1	7.8
NE	1.5	2.6	3.3	1.7	.3							9.4	7.8
ENE	2.1	4.5	2.7	.7		.0	.1					10.1	6.2
E	3.2	5.6	2.9	.4								12.1	5.3
ESE	2.5	2.0	.7	.0								5.3	4.2
SE	2.7	1.1	.2									4.0	3.4
SSE	1.7	1.6	.9	.1								4.3	4.9
S	2.0	3.0	.7	.1								5.8	4.5
SSW	1.0	.5	.3									1.8	4.3
SW	.6	.5	.1									1.2	3.8
WSW	.6	1.0	.3									1.9	4.5
W	1.4	1.3	.3	.1								3.1	4.7
WNW	.6	1.1	.4	.0								2.2	5.1
NW	1.1	1.6	.8	.0								3.6	4.9
NNW	.7	.7	.4	.0								1.9	4.8
VARBL													
CALM												21.8	
	23.2	30.5	18.3	5.7	.5	.0	.1					100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 2035

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.7	2.4	.4								5.5	6.6
NNE	2.4	2.3	4.3	1.9	.0							11.0	7.4
NE	2.8	4.5	3.8	1.1	.1							12.3	6.2
ENE	1.8	3.8	1.2	.3			.1	.0				7.3	5.8
E	2.1	1.9	.7	.3								4.7	4.3
ESE	.4	.6	.2									1.3	4.6
SE	.9	.4	.0		.0							1.4	3.9
SSE	.8	.6	.2	.0								1.7	4.3
S	2.1	1.3	.8	.1	.0							4.4	4.8
SSW	1.0	1.3	.6	.0								2.9	4.9
SW	1.1	.9	.3	.0								2.4	4.2
WSW	.7	1.1	.2									2.0	4.1
W	1.5	1.7	.7									3.9	4.3
WNW	.7	1.0	.1									1.8	4.1
NW	.7	.9	1.1	.2								2.9	6.2
NNW	.5	.9	.7	.2								2.3	5.9
VARBL													
CALM												32.2	
	20.6	24.9	17.4	4.4	.3		.1	.0				100.0	3.8

TOTAL NUMBER OF OBSERVATIONS 2036

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.2	3.8	1.9	.3								9.1	5.0
NNE	1.3	3.0	2.0	.5								7.0	3.9
NE	1.5	1.9	.9	.4								4.6	5.3
ENE	.8	1.0	.7	.2								2.6	5.5
E	1.1	.6	.2									2.0	3.6
ESE	.6	.3	.2									1.1	4.3
SE	.6	.4	.3	.1								1.3	4.7
SSE	.4	.7	.4	.3								1.8	6.4
S	.8	1.3	1.0	.5	.1							3.7	6.7
SSW	1.2	1.7	1.8	.9	.1							5.6	7.0
SW	1.1	1.9	1.1	.3								4.3	5.6
WSW	1.4	1.3	.9	.2								3.7	5.2
W	2.6	4.0	2.2	.3	.1							9.1	5.3
WNW	1.2	2.0	1.8	1.0	.2	.1						6.2	7.4
NW	1.1	1.6	1.1	.4	.2							4.3	6.3
NNW	1.3	1.9	1.0	.3								4.4	5.5
VARBL													
CALM												29.2	
	20.2	27.4	17.4	5.2	.6	.1						100.0	4.1

TOTAL NUMBER OF OBSERVATIONS 1980

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.7	5.0	2.4	.3								11.4	5.0
NNE	3.0	3.6	2.8	.5	.1							9.9	5.5
NE	1.2	2.0	1.2	.3								4.7	5.6
ENE	.5	1.0	.6	.2								2.2	5.9
E	.6	.5	.3									1.3	4.1
ESE	.4	.1	.2									.6	4.2
SE	.5	.3	.3	.1								1.1	4.9
SSE	.5	.2	.4	.1								1.2	5.6
S	.5	1.4	.9	.4	.1							3.1	7.0
SSW	.7	1.6	1.6	.5	.2							4.5	7.2
SW	1.4	1.3	1.1	.4								4.1	5.6
WSW	.9	1.7	.9	.1	.1	.1						3.7	5.9
W	1.0	2.9	2.1	.7	.1	.1						8.8	5.8
WNW	1.5	1.3	1.7	.5	.1	.2						5.3	7.1
NW	1.3	2.3	1.1	.5	.1							5.2	5.8
NNW	1.4	2.1	.8	.2								4.4	4.9
VARBL													
CALM												28.4	
	21.1	27.1	18.1	4.3	.7	.3						100.0	4.1

TOTAL NUMBER OF OBSERVATIONS 1979

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.7	5.1	3.0	.4								12.1	5.2
NNE	2.0	4.8	3.5	.9								11.2	6.3
NE	1.7	2.1	1.7	.5								5.9	6.0
ENE	1.3	1.2	1.1	.4								3.9	5.7
E	.8	.7	.1									1.6	3.7
ESE	.1	.2										.3	4.0
SE	.3	.1	.3	.2								.8	6.8
SSE	.4	.4	.5	.3								1.6	6.5
S	.7	1.3	1.1	.3								3.3	6.4
SSW	.9	1.5	.9	.7	.1							3.9	6.7
SW	.7	1.4	1.5	.2								3.6	6.2
WSW	1.1	1.5	1.5	.4	.1							4.6	6.3
W	2.6	2.9	2.6	.8								9.0	5.8
WNW	1.3	1.4	1.9	.8	.4	.1	.1					5.8	7.9
NW	1.4	1.7	1.5	.4								4.9	6.0
NNW	1.3	2.0	1.2	.1								4.7	5.0
VARBL													
CALM												22.9	
	20.2	28.1	22.2	6.0	.5	.1	.1					100.0	4.6

TOTAL NUMBER OF OBSERVATIONS 1977

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	3.9	4.4	1.0	.1							11.3	6.5
NNE	1.9	3.2	3.8	1.8	.2							10.5	7.4
NE	1.0	3.4	4.9	1.5								10.8	7.4
ENE	.6	2.6	2.5	1.0	.1							6.8	7.3
E	1.2	1.4	1.7	.5								4.7	6.4
ESE	.3	.6	.3									1.2	5.5
SE	.3	.4	.7	.1								1.5	6.9
SSE	.4	1.0	.4	.3	.1							2.1	7.0
S	.4	1.1	1.1	.6	.1							3.2	7.5
SSW	.5	1.3	1.4	.9	.3	.1						4.3	8.4
SW	.4	1.0	2.0	.5	.3							4.1	8.1
WSW	.5	1.8	2.3	1.5	.3	.1						6.4	8.7
W	1.5	1.9	2.7	2.0	.5	.1		.1				8.8	9.0
WNW	.7	1.2	2.6	2.2	.6	.1		.1				7.3	9.7
NW	.9	1.6	1.7	1.2								5.4	7.4
NNW	1.3	1.5	2.0	.6								5.3	6.4
VARBL													
CALM												6.3	
	13.2	27.7	34.7	15.4	2.3	.3		.2				100.0	7.2

TOTAL NUMBER OF OBSERVATIONS 1980

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	2.9	3.3	.6	.1							8.0	6.7
NNE	.6	2.3	2.3	.7	.1							6.2	7.0
NE	.7	2.0	3.3	.9	.1							6.9	7.6
ENE	.5	2.3	2.7	1.0								6.4	7.4
E	.6	2.0	4.0	1.7	.1							8.3	8.2
ESE	.2	.9	1.6	.2	.1							3.2	6.9
SE	.4	1.1	1.2	.1								2.5	6.7
SSE	.5	1.0	1.4	.9	.1							3.9	7.8
S	.6	1.8	2.2	1.0	.1							5.7	7.8
SSW	.7	1.3	1.7	1.0	.1							4.7	7.8
SW	.7	1.2	1.4	1.1	.5							4.8	8.7
WSW	.5	1.0	1.7	1.5	.7	.2						5.5	10.4
W	1.0	2.2	4.2	3.0	1.0	.2	.1					11.9	9.8
WNW	.3	1.6	2.4	3.7	.5	.3	.1					8.8	11.0
NW	.8	1.3	2.7	1.0	.2	.1						6.0	8.3
NNW	.6	1.8	1.7	.7	.1							4.8	7.1
VARBL													
CALM												2.3	
	10.2	26.8	37.8	18.8	3.3	.7	.2					100.0	8.1

TOTAL NUMBER OF OBSERVATIONS 1979

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 1300-1700 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	1.9	2.0	.6								5.0	6.9
NNE	.6	1.6	1.7	.5	.1							4.4	6.9
NE	.6	1.6	1.5	.4								4.0	6.6
ENE	.7	2.1	2.8	.6								6.1	7.1
E	1.0	4.2	4.5	.6								10.4	6.7
ESE	1.3	3.1	1.9	.1								6.5	5.5
SE	1.5	2.6	1.6	.3								6.0	5.7
SSE	.8	3.3	2.2	.7	.1							7.2	6.7
S	1.1	2.3	2.7	1.0								7.0	7.0
SSW	.4	.7	1.1	.4	.2							2.6	8.0
SW	.4	.8	1.5	.4	.1							3.0	7.5
WSW	.6	1.6	1.8	.7	.2	.2						4.9	8.3
W	1.0	3.5	2.9	2.9	.8	.2	.2					11.5	9.4
WNW	.8	1.7	3.0	2.6	.4	.1	.1					8.6	9.4
NW	.5	1.6	2.3	1.5	.2							6.1	8.5
NNW	.6	2.0	1.3	.4								4.2	6.3
VARBL													
CALM												2.4	
	12.1	34.6	34.8	13.5	1.9	.4	.2					100.0	7.2

TOTAL NUMBER OF OBSERVATIONS 1980

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

ALL WEATHER CLASS | 1800-2000 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	2.0	1.4	.6	.1							5.3	6.1
NNE	1.1	1.1	1.8	.2								4.2	6.1
NE	1.1	1.8	1.0	.1								4.0	5.2
ENE	1.6	2.2	1.8	.1								5.7	5.2
E	3.7	3.5	1.3									8.5	4.2
ESE	2.0	1.7	.3									3.9	3.7
SE	2.2	.9	.5	.1								3.6	3.8
SSE	1.6	1.7	1.2	.7								5.1	6.0
S	2.6	3.4	2.4	.5	.1							8.9	5.7
SSW	.8	1.2	1.0	.3	.1							3.3	6.1
SW	1.0	1.0	.9	.1								2.9	5.3
WSW	1.6	1.3	.7	.1								3.5	4.6
W	2.0	3.3	1.2	.8	.2	.1						7.4	6.1
WNW	.8	1.9	1.4	.6	.2	.2						5.0	7.9
NW	.6	1.2	1.0	.4	.2							3.3	6.9
NNW	.9	.8	.3	.2	.1							2.2	5.5
VARBL													
CALM												23.1	
	24.7	28.8	18.0	4.3	.8	.3						100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 1980

USAFETAC FORM 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	2.7	1.6	.4	.1							6.1	6.0
NNE	1.4	1.9	1.5	.2								4.9	5.5
NE	1.4	2.2	2.3	.2								6.0	5.9
ENE	1.4	1.9	1.1	.1								4.4	4.9
E	1.4	1.6	.6									3.5	4.4
ESE	.8	1.1	.4									2.2	4.6
SE	.8	.7	.2									1.7	4.1
SSE	.8	.7	.4	.5								2.3	6.0
S	1.4	2.4	2.1	.7	.2							6.6	6.8
SSW	1.3	1.2	1.6	.7								4.7	6.6
SW	.9	1.3	1.1	.1								3.4	5.5
WSW	1.2	1.3	.4	.2								3.1	4.8
W	2.0	3.1	1.3	.9	.1							7.4	6.1
WNW	1.0	1.3	2.0	1.2	.2	.1						5.7	8.3
NW		1.3	1.2	.5	.1							3.4	7.3
NNW	1.0	.6	.7	.2	.1	.1						2.6	6.4
VARBL													
CALM												32.0	
	18.1	25.2	18.4	5.6	.7	.1						100.0	4.1

TOTAL NUMBER OF OBSERVATIONS 1980

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13024 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	1.4	1.5	1.0								5.1	7.0
NNE	1.6	2.3	2.9	.7	.0							7.5	6.6
NE	2.0	2.8	2.0	.6								7.4	5.9
ENE	.8	1.0	.8	.2								2.9	5.8
E	.4	.7	.2									1.4	4.4
ESE	.6	.1	.3	.1								1.2	4.8
SE	.3	.1	.1	.1	.0							.8	5.6
SSE	.7	.9	.8	.2								2.7	6.0
S	1.2	2.1	1.8	.4								5.5	6.2
SSW	1.2	1.3	1.3	.2	.0							4.1	6.1
SW	1.1	.7	.9	.1	.0							2.9	5.6
WSW	1.7	2.0	.7									4.4	4.4
W	3.3	3.8	2.0	.9	.0		.0					10.0	5.7
WNW	1.5	2.6	1.6	1.0	.1							6.9	6.5
NW	1.1	1.7	1.8	.3								4.8	6.0
NNW	.8	1.8	1.2	.3	.0							4.2	6.1
VARBL													
CALM												28.2	
	19.8	25.3	19.9	6.3	.4		.0					100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 2042

USAFETAC FORM 0-8 5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	2.9	2.7	1.1	.1							8.9	6.6
NNE	1.3	3.2	2.9	1.1								8.4	6.8
NE	1.9	1.9	2.0	.6	.0							6.3	6.1
ENE	.5	.9	.5	.2								2.2	5.8
E	.7	.9	.2									1.9	4.1
ESE	.3	.3	.2	.0								.9	5.3
SE	.2	.2	.0	.0								.5	4.7
SSE	.8	.8	.4	.3								2.3	5.5
S	1.0	1.7	1.5	.1	.0							4.3	6.0
SSW	.5	.8	1.2	.4	.0							3.0	7.2
SW	1.3	1.4	1.4	.2								4.3	5.4
WSW	1.4	1.9	1.1	.1								4.6	5.1
W	4.0	3.3	2.3	.5	.1	.0						10.2	5.3
WNW	1.1	2.3	1.9	.7	.2							6.1	6.9
NW	1.0	2.1	1.1	.4	.0							4.6	6.1
NNW	1.3	1.9	.7	.3								4.1	5.3
VARBL													
CALM												27.4	
	19.1	26.4	20.1	6.3	.7	.0						100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 2043

USAFETAC FORM JUL 64 0-8 5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.3	3.0	2.1	1.2	.1							8.7	6.4
NNE	1.7	2.5	3.1	1.6	.1							9.1	7.4
NE	1.6	2.4	2.6	.4								7.0	6.1
ENE	1.1	1.5	.8	.1								3.5	5.2
E	.9	.9	.5	.1								2.4	4.6
ESE	.4	.6	.0									1.0	4.0
SE	.3	.3	.1	.1								.8	5.1
SSE	.5	.4	.3	.1								1.4	5.3
S	.8	1.7	2.1	.5		.0						5.1	7.1
SSW	.7	.7	.9	.1								2.4	5.8
SW	1.4	2.3	.7	.0								4.5	4.9
WSW	.9	2.0	.9	.2	.0							4.0	5.9
W	3.5	3.3	2.9	.8	.2	.0	.0					10.9	6.1
WNW	1.0	1.9	1.8	1.2	.0	.0						5.9	7.5
NW	1.0	1.6	.9	.4	.0							3.9	6.0
NNW	.8	2.1	1.0	.3	.0							4.2	5.9
VARBL													
CALM												25.0	
	18.8	27.3	20.7	7.2	.7	.1	.0					100.0	4.7

TOTAL NUMBER OF OBSERVATIONS 2044

USAFETAC FORM 0 8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.6	2.9	2.3	.9	.2							8.0	6.8
NNE	1.4	1.9	3.2	2.5	.5	.1						9.6	8.8
NE	1.3	3.4	3.4	1.9	.2	.0						10.2	7.5
ENE	1.2	2.1	2.1	.9			.0					6.3	6.9
E	.9	1.6	1.0	.2								3.7	5.6
ESE	.6	.5	.3									1.5	4.4
SE	.4	.3	.2	.0								1.0	5.6
SSE	.5	.6	.8	.1								2.2	6.2
S	.7	1.3	2.5	.6	.1							5.3	7.5
SSW	.4	1.4	1.8	1.0	.0							4.6	8.1
SW	.3	1.1	1.9	.2								3.5	7.3
WSW	.8	1.2	1.5	.7		.0						4.2	7.3
W	1.8	3.0	3.1	2.2	.4		.0					10.6	7.9
WNW	.7	2.0	3.2	2.3	.7	.0						8.9	9.3
NW	.7	1.9	2.6	1.2	.2							6.6	8.0
NNW	.7	1.3	1.6	.6	.0							4.3	7.1
VARBL													
CALM												9.6	
	14.0	26.5	31.7	15.4	2.5	.2	.1					100.0	6.9

TOTAL NUMBER OF OBSERVATIONS 2044

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 40-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	2.4	2.8	.4	.0							6.9	6.6
NNE	1.1	1.6	1.9	1.5	.2	.0						6.4	8.4
NE	.5	2.1	2.6	1.8	.1	.0						7.2	8.7
ENE	.7	2.0	2.3	1.2	.1							6.3	7.8
E	1.1	2.3	1.8	.5								5.7	6.3
ESE	.4	1.2	1.2	.0								2.9	5.9
SE	.5	.5	.4	.2	.1							1.8	6.8
SSE	.5	.8	1.9	.6								3.8	7.5
S	.8	1.4	3.2	1.5	.1							7.0	8.4
SSW	.5	.9	1.6	1.0	.1	.0						4.2	8.8
SW	.6	1.2	1.2	.9	.0							4.0	7.5
WSW	.4	1.7	1.9	1.6	.2	.1						6.0	9.1
W	.9	3.3	5.0	3.7	.7	.1	.0	.0				13.8	9.5
WNW	.8	1.9	3.4	2.9	.8	.1						10.0	9.8
NW	.6	1.6	2.4	1.5	.2							6.4	8.7
NNW	.6	1.3	1.5	.4	.1							4.0	7.3
VARBL													
CALM												3.8	
	11.3	26.1	35.2	19.9	3.1	.5	.0	.0				100.0	8.0

TOTAL NUMBER OF OBSERVATIONS 2043

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.8	1.7	.1	.2							4.8	6.6
NNE	.5	1.4	1.7	.6	.2							4.5	7.7
NE	.6	1.1	2.3	.5	.1							4.9	8.0
ENE	.4	2.5	1.8	1.2								5.9	7.4
E	.9	3.3	3.2	.6	.0							8.1	6.9
ESE	1.1	2.3	1.6	.1								5.1	5.5
SE	.8	2.6	1.4	.4	.0							5.2	6.1
SSE	1.1	3.3	2.5	.4	.0							7.3	6.3
S	1.1	2.1	3.0	.7	.1							7.1	7.1
SSW	.4	.8	.8	.1								2.3	6.1
SW	.4	1.0	1.2	.4	.0							3.0	7.2
WSW	.5	1.3	1.8	.9	.0							4.6	7.9
W	1.3	3.6	4.8	3.0	.6	.0						13.3	8.7
WNW	.3	2.7	3.4	2.3	.5	.0						9.6	9.0
NW	.9	2.2	2.0	1.2	.1	.0						6.1	8.0
NNW	.6	1.3	1.7	.3	.0							3.9	6.9
VARBL													
CALM												3.9	
	12.2	33.2	34.9	13.5	2.2	.1						100.0	7.1

TOTAL NUMBER OF OBSERVATIONS 2044

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS)

1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.6	1.3	.4	.1							4.4	6.6
NNE	.7	.9	1.3	.7	.2							3.8	8.1
NE	.3	2.0	2.1	.8	.0							5.4	7.4
ENE	1.1	2.3	1.9	.3								5.9	6.1
E	2.8	2.9	.7	.1								6.6	4.2
ESE	1.4	1.1	.3	.1								2.8	4.3
SE	1.9	1.0	.8	.2								3.9	4.7
SSE	1.5	2.5	1.2	.2	.0	.1						5.5	5.6
S	1.7	4.1	2.0	.7	.0							8.5	5.9
SSW	.8	1.1	.5	.1								2.5	5.1
SW	.5	1.0	.5									2.1	5.2
WSW	1.2	1.3	.7	.0								3.3	4.7
W	2.7	3.2	2.1	.5	.0		.0					8.6	5.7
WNW	1.8	2.0	1.3	1.4	.1	.0						6.7	7.1
NW	1.1	1.5	.9	.3	.0							3.9	5.6
NNW	1.0	.5	.5		.1	.0						2.2	5.6
VARBL													
CALM												24.1	
	21.9	28.9	18.1	6.0	.8	.2	.0					100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 2045

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.3	1.2	.6	.1							3.9	7.4
NNE	1.2	1.8	2.3	.9	.2							6.4	7.4
NE	2.1	2.9	2.0	.6	.0							7.6	5.9
ENE	1.1	1.5	1.1	.3								4.0	5.7
E	1.2	1.1	.5									2.8	4.5
ESE	.6	.5	.1									1.3	4.5
SE	.4	.7	.8	.1								2.1	6.1
SSE	1.6	.9	.6	.2	.0							3.4	5.1
S	2.0	2.3	2.7	.3	.2							7.4	6.2
SSW	.8	1.5	.8	.4								3.5	6.2
SW	1.4	1.1	1.2	.1								3.9	5.2
WSW	1.9	1.6	1.0	.0								4.5	4.7
W	2.3	3.6	1.2	.7								8.1	5.4
WNW	.7	1.5	1.9	.6	.1							4.9	7.4
NW	1.0	1.3	1.3	.7	.0							4.4	6.8
NNW	.9	1.1	.9	.2								3.1	5.8
VARBL													
CALM												28.6	
	20.3	24.8	19.6	5.9	.8							100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 2043

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) ALL (MONTH)

INSTRUMENT (CLASS) ALL (HOURS (L.S.T.))

CIG 200 TO 1400 FT W/ VSBY 1/2 MI OR MORE, AND/OR VSBY 1/2 TO 2-1/2 MI W/CIG 200 FT OR MORE (CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.3	4.1	4.1	1.1	.1							11.8	6.6
NNE	2.1	4.1	4.9	2.4	.3	.1	.0					13.9	7.7
NE	2.1	3.5	3.9	2.2	.3	.0						12.1	7.6
ENE	1.1	2.4	3.3	1.7	.2	.1	.0	.0				8.7	8.1
E	1.0	1.9	2.1	.8	.1	.0	.0	.0				5.9	7.1
ESE	.4	.8	.7	.3	.0	.0	.0					2.0	7.3
SE	.4	.6	.5	.2	.0			.0				1.7	6.7
SSE	.3	.6	.6	.4	.1	.0						2.0	8.5
S	.7	1.2	1.5	.8	.1	.0						4.3	7.8
SSW	.4	.9	1.2	.5	.1	.0						3.0	7.8
SW	.5	1.0	1.0	.3	.1	.0	.0					3.0	7.1
WSW	.5	1.0	1.0	.4	.0	.1		.0				3.0	7.5
W	.8	1.5	1.6	.7	.2	.0	.0					4.8	7.6
WNW	.5	1.1	1.2	.8	.1	.0	.0					3.5	7.9
NW	.7	1.3	1.4	.4	.1	.0	.0		.0			3.9	6.8
NNW	.9	1.7	1.8	.5	.1	.0						5.0	6.9
VARBL													
CALM												11.5	
	14.7	27.4	30.7	13.2	1.9	.5	.1	.0	.0			100.0	6.6

TOTAL NUMBER OF OBSERVATIONS 19134

USAFETAC FORM JUL 64 0 8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
EPAC/USAF
AIR WEATHER SERVICE (MAC)
ASHEVILLE, NORTH CAROLINA

PART D CEILING VERSUS VISIBILITY

This summary is a bivariate percentage frequency distribution by classes of ceiling from zero to equal to or greater than 20,000 feet and as a separate class "no ceiling", versus visibility in 16 classes from zero to equal to or greater than 10 miles. Data are derived from hourly observations, and three sets of tables are presented as follows:

1. Annual - all years and all hours combined
2. By month - all years and all hours combined
3. By month - by standard 3-hour groups

Due to the cumulative nature of this presentation, it is possible to determine the percentage frequency of occurrence for any given limit of ceiling or visibility separately, or in combination of ceiling and visibility. The totals progress to the right and downward. Ceiling may be determined independently by referring to totals in the extreme right hand column. Also, visibility may be determined independently by reference to the horizontal row of totals at the bottom of the page. The percentage frequency for which the station was meeting or exceeding any given set of minima may be determined from the figure at the intersection of the appropriate ceiling column and visibility row. Several examples in the use of these tables are shown on pages 2 and 3 below.

U. S. Weather Bureau and Navy stations did not report ceilings within the range 10 000 feet and higher prior to January 1949. Summaries prepared from data for these stations using the earlier period and data subsequent to January 1949 will be modified to limit ceilings to 10,000 feet. Short periods of record prior to 1949 for these stations will be eliminated from the summary. For Air Force stations, the "no ceiling" category includes clear and scattered conditions, and ceilings above 20,000 feet for period through June 1948. Beginning in July 1948 for Air Force stations and January 1949 for USWB and U. S. Navy stations the "no ceiling" category consists of observations with less than 6/10 total sky cover and those cases where total sky cover is 6/10 or more, but not more than 1/2 of the sky cover is opaque.

EXAMPLES FOR USE OF CEILING VERSUS VISIBILITY TABLES IN THIS TABULATION

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥ 10	≥ 6	≥ 5	≥ 4	≥ 3	≥ 2½	≥ 2	≥ 1½	≥ 1¼	≥ 1	≥ ¾	≥ ⅝	≥ ½	≥ 5/1	A	0
No Ceiling																
≥ 1800																
≥ 1500					91.0											92.6
≥ 1200																
≥ 1000																
≥ 900																
≥ 800																
≥ 700																
≥ 600																
≥ 500										97.4						98.1
≥ 400																
≥ 300																
≥ 200																
≥ 100																
0					95.4		96.9			98.3						100.0

EXAMPLE # 1 Read ceiling values independently of visibility under column at right headed ≥ 0. For instance, from the table: Ceiling ≥ 1500 feet = 92.6%.
Ceiling ≥ 500 feet = 98.1%.

EXAMPLE # 2 Read visibilities independently of ceilings on bottom line opposite ≥ 0. From the table:
Visibility ≥ 3 miles = 95.4%.
Visibility ≥ 2 miles = 96.9%.
Visibility ≥ 1 mile = 98.3%.

EXAMPLE # 3 To obtain combinations of ceiling with visibility, read figure at intersection of the two categories; i.e.: Ceiling ≥ 1500 feet with visibility ≥ 3 miles = 91.0%.

ADDITIONAL EXAMPLES

EXAMPLE # 4 Values below minimums stated in the table may be obtained by subtracting the value given in the table from 100%.
Thus, to obtain the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles, subtract the value read from the table at the intersection, which is 91.0, from 100.0. The answer 9.0 is the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles.

Likewise, the percentage of observations with ceiling < 500 feet and/or visibility < 1 mile is 2.6, obtained by subtracting 97.4 from 100.0.

EXAMPLE # 5 To find the percentage of observations falling within the two categories given in example above, subtract the value read from the table for the first set of limits from the value in the table for the second set of limits. The difference will be the percentage of observations meeting the lower set of limits, but not meeting the higher set of limits.

The value 91.0 read from the table at the intersection of $\geq$ 1500 feet with $\geq$ 3 miles, subtracted from 97.4 read from the table at the intersection of $\geq$ 500 feet with $\geq$ 1 mile is equal to 6.4%. Thus; 6.4 percent of the observations meet the criteria: "ceiling $\geq$ 500 feet with visibility $\geq$ 1 mile, but < 3 miles; or ceiling $\geq$ 500 feet, but < 1500 feet with visibility $\geq$ 1 mile."

Since these tabulations are prepared in several ways including by month, by 3-hour groups it is possible to determine diurnal variations of ceiling and visibility limits as well as probabilities of various ceiling-visibility combinations.

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13624 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	35.0	51.9	53.6	54.5	55.3	55.4	55.8	55.9	56.0	56.2	56.4	56.4	56.5	56.5	56.6	56.8
≥ 20000	40.1	59.7	61.6	62.7	63.5	63.6	64.0	64.2	64.3	64.5	64.7	64.7	64.8	64.9	65.0	65.2
≥ 18000	40.3	59.9	61.9	63.0	63.8	63.9	64.3	64.5	64.5	64.8	65.0	65.0	65.1	65.1	65.3	65.4
≥ 16000	40.4	60.2	62.1	63.2	64.0	64.2	64.6	64.8	64.8	65.1	65.2	65.2	65.4	65.4	65.5	65.7
≥ 14000	41.3	61.5	63.5	64.6	65.5	65.6	66.0	66.2	66.3	66.5	66.7	66.7	66.8	66.9	67.0	67.2
≥ 12000	42.6	63.8	65.9	67.0	67.9	68.0	68.4	68.6	68.7	69.0	69.1	69.1	69.3	69.3	69.4	69.6
≥ 10000	44.1	66.7	68.9	70.1	71.0	71.1	71.6	71.8	71.8	72.1	72.3	72.3	72.4	72.4	72.6	72.8
≥ 9000	44.5	67.6	69.8	71.1	72.0	72.1	72.6	72.8	72.8	73.1	73.3	73.3	73.4	73.5	73.6	73.8
≥ 8000	45.4	69.3	71.7	72.9	73.9	74.0	74.5	74.7	74.8	75.1	75.2	75.2	75.4	75.4	75.6	75.7
≥ 7000	45.9	70.4	72.8	74.1	75.1	75.2	75.7	75.9	76.0	76.3	76.4	76.4	76.6	76.6	76.7	76.9
≥ 6000	46.3	71.2	73.7	75.0	76.0	76.1	76.6	76.9	76.9	77.2	77.4	77.4	77.5	77.6	77.7	77.9
≥ 5000	46.8	72.3	74.8	76.2	77.2	77.4	77.9	78.1	78.2	78.5	78.6	78.6	78.8	78.8	78.9	79.1
≥ 4500	47.1	72.8	75.4	76.8	77.8	78.0	78.5	78.8	78.8	79.1	79.3	79.3	79.4	79.5	79.6	79.8
≥ 4000	47.7	74.0	76.6	78.0	79.1	79.3	79.8	80.0	80.1	80.4	80.6	80.6	80.7	80.8	80.9	81.1
≥ 3500	48.3	75.1	77.8	79.2	80.3	80.5	81.0	81.3	81.4	81.7	81.8	81.8	82.0	82.0	82.2	82.4
≥ 3000	49.4	77.0	79.8	81.4	82.5	82.7	83.3	83.5	83.6	83.9	84.1	84.1	84.2	84.3	84.4	84.6
≥ 2500	50.7	79.4	82.3	83.9	85.1	85.3	85.9	86.1	86.2	86.5	86.7	86.7	86.9	86.9	87.0	87.2
≥ 2000	51.4	81.0	84.0	85.7	87.0	87.1	87.8	88.0	88.1	88.4	88.6	88.6	88.8	88.8	88.9	89.1
≥ 1800	51.6	81.5	84.6	86.2	87.5	87.7	88.3	88.6	88.7	89.0	89.2	89.2	89.4	89.4	89.5	89.7
≥ 1500	52.0	82.5	85.7	87.4	88.8	89.0	89.6	89.9	90.0	90.3	90.5	90.5	90.7	90.7	90.9	91.1
≥ 1200	52.3	83.5	86.8	88.7	90.1	90.3	91.0	91.3	91.4	91.7	91.9	91.9	92.1	92.1	92.2	92.4
≥ 1000	52.5	84.2	87.6	89.5	91.0	91.2	91.9	92.2	92.3	92.7	92.9	92.9	93.1	93.1	93.2	93.4
≥ 900	52.5	84.5	88.0	90.0	91.5	91.8	92.5	92.8	92.9	93.3	93.5	93.5	93.7	93.7	93.8	94.0
≥ 800	52.6	84.9	88.5	90.6	92.2	92.4	93.2	93.5	93.6	94.0	94.2	94.2	94.4	94.4	94.6	94.7
≥ 700	52.7	85.2	88.9	91.1	92.8	93.1	93.9	94.2	94.3	94.7	94.9	94.9	95.1	95.1	95.3	95.5
≥ 600	52.7	85.5	89.3	91.5	93.3	93.6	94.5	94.9	95.0	95.4	95.6	95.6	95.8	95.8	96.0	96.1
≥ 500	52.7	85.7	89.6	92.0	93.9	94.3	95.2	95.6	95.7	96.2	96.4	96.4	96.6	96.7	96.8	97.0
≥ 400	52.7	85.9	89.8	92.2	94.3	94.7	95.7	96.3	96.4	97.0	97.2	97.2	97.4	97.4	97.6	97.8
≥ 300	52.7	85.9	89.9	92.4	94.6	95.0	96.2	96.9	97.0	97.7	98.0	98.0	98.2	98.2	98.4	98.6
≥ 200	52.7	85.9	90.0	92.5	94.7	95.1	96.4	97.1	97.3	98.0	98.4	98.4	98.7	98.7	98.9	99.2
≥ 100	52.7	85.9	90.0	92.5	94.7	95.1	96.4	97.1	97.3	98.1	98.5	98.5	98.9	98.9	99.2	99.5
≥ 0	52.7	85.9	90.0	92.5	94.7	95.1	96.4	97.1	97.3	98.1	98.5	98.5	98.9	99.0	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 19284

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	33.2	48.6	50.3	51.0	51.9	52.0	52.3	52.5	52.5	52.8	53.0	53.0	53.2	53.2	53.3	53.6
≥ 20000	36.8	54.3	56.1	56.9	57.8	58.0	58.3	58.5	58.6	58.9	59.1	59.2	59.4	59.4	59.5	59.8
≥ 18000	36.9	54.5	56.3	57.1	58.0	58.2	58.6	58.7	58.8	59.1	59.4	59.4	59.6	59.6	59.8	60.0
≥ 16000	37.1	54.8	56.6	57.5	58.4	58.5	58.9	59.1	59.2	59.5	59.7	59.7	59.9	59.9	60.1	60.4
≥ 14000	37.7	55.9	57.7	58.6	59.6	59.7	60.1	60.3	60.3	60.7	60.9	60.9	61.1	61.1	61.3	61.5
≥ 12000	38.7	57.6	59.6	60.5	61.5	61.6	62.0	62.2	62.3	62.6	62.8	62.9	63.1	63.1	63.2	63.5
≥ 10000	39.9	60.1	62.1	63.1	64.1	64.3	64.7	64.9	64.9	65.3	65.5	65.5	65.7	65.7	65.9	66.2
≥ 9000	40.3	60.9	63.0	64.0	65.0	65.1	65.6	65.8	65.8	66.2	66.4	66.4	66.6	66.6	66.8	67.1
≥ 8000	41.1	62.6	64.8	65.8	66.9	67.1	67.5	67.7	67.8	68.2	68.4	68.4	68.6	68.6	68.8	69.1
≥ 7000	41.8	64.4	66.6	67.7	68.8	69.0	69.4	69.7	69.7	70.1	70.4	70.4	70.6	70.6	70.8	71.0
≥ 6000	42.2	65.6	67.9	69.0	70.2	70.3	70.8	71.0	71.1	71.5	71.7	71.8	72.0	72.0	72.2	72.4
≥ 5000	43.0	67.3	69.7	70.9	72.1	72.3	72.8	73.0	73.1	73.5	73.8	73.8	74.0	74.0	74.2	74.5
≥ 4500	43.3	68.1	70.6	71.8	73.0	73.2	73.7	74.0	74.0	74.5	74.7	74.7	74.9	74.9	75.2	75.4
≥ 4000	43.9	69.4	72.0	73.3	74.6	74.8	75.4	75.6	75.7	76.1	76.4	76.4	76.6	76.6	76.8	77.1
≥ 3500	44.3	70.4	73.0	74.4	75.8	76.0	76.5	76.8	76.9	77.3	77.6	77.6	77.8	77.8	78.0	78.3
≥ 3000	44.9	71.7	74.4	75.8	77.3	77.5	78.1	78.3	78.4	78.9	79.1	79.1	79.3	79.4	79.6	79.8
≥ 2500	45.5	73.4	76.2	77.7	79.2	79.4	80.1	80.4	80.4	80.9	81.2	81.2	81.4	81.5	81.7	81.9
≥ 2000	46.1	74.8	77.6	79.2	80.8	81.0	81.7	82.1	82.1	82.6	82.9	82.9	83.1	83.1	83.4	83.6
≥ 1800	46.2	75.1	78.0	79.6	81.2	81.5	82.2	82.5	82.6	83.1	83.4	83.4	83.6	83.7	83.9	84.1
≥ 1500	46.6	76.2	79.3	80.9	82.6	82.8	83.5	83.9	84.0	84.5	84.8	84.8	85.0	85.0	85.3	85.5
≥ 1200	46.9	77.3	80.5	82.3	84.0	84.3	85.1	85.5	85.5	86.1	86.4	86.4	86.6	86.6	86.9	87.1
≥ 1000	47.1	78.1	81.4	83.3	85.1	85.4	86.2	86.7	86.8	87.3	87.6	87.6	87.8	87.8	88.1	88.3
≥ 900	47.1	78.3	81.8	83.7	85.5	85.9	86.7	87.2	87.2	87.8	88.1	88.1	88.3	88.3	88.6	88.8
≥ 800	47.2	78.8	82.2	84.2	86.2	86.5	87.4	87.8	87.9	88.5	88.8	88.8	89.0	89.0	89.3	89.5
≥ 700	47.2	79.1	82.7	84.8	86.9	87.2	88.1	88.7	88.8	89.3	89.6	89.6	89.9	89.9	90.1	90.4
≥ 600	47.3	79.5	83.2	85.5	87.7	88.1	89.0	89.6	89.7	90.4	90.7	90.7	90.9	90.9	91.2	91.4
≥ 500	47.3	79.9	83.8	86.2	88.6	89.0	90.2	90.9	91.0	91.7	92.0	92.0	92.3	92.3	92.5	92.8
≥ 400	47.3	80.1	84.1	86.7	89.4	90.0	91.4	92.3	92.4	93.3	93.6	93.7	93.9	93.9	94.2	94.4
≥ 300	47.3	80.1	84.3	87.0	89.9	90.6	92.2	93.3	93.6	94.9	95.4	95.4	95.7	95.8	96.0	96.3
≥ 200	47.3	80.2	84.3	87.1	90.0	90.8	92.6	94.0	94.3	95.8	96.5	96.6	97.1	97.1	97.4	97.7
≥ 100	47.3	80.2	84.3	87.1	90.0	90.8	92.6	94.0	94.4	96.0	96.9	96.9	97.7	97.8	98.3	98.7
0	47.3	80.2	84.3	87.1	90.0	90.8	92.6	94.0	94.4	96.0	96.9	97.0	97.8	97.9	98.5	100.0

TOTAL NUMBER OF OBSERVATIONS 17111

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	33.1	47.9	49.2	50.1	50.7	50.8	51.1	51.2	51.2	51.4	51.5	51.5	51.6	51.6	51.7	51.9
≥ 20000	37.1	54.3	55.7	56.8	57.4	57.5	57.8	57.9	58.0	58.2	58.3	58.3	58.4	58.4	58.5	58.7
≥ 18000	37.3	54.5	55.0	57.1	57.7	57.8	58.1	58.2	58.3	58.5	58.6	58.6	58.7	58.7	58.9	59.0
≥ 16000	37.4	54.8	56.2	57.3	58.0	58.1	58.4	58.5	58.6	58.7	58.9	58.9	59.0	59.0	59.1	59.3
≥ 14000	38.2	56.1	57.6	58.7	59.3	59.4	59.8	59.9	59.9	60.1	60.3	60.3	60.4	60.4	60.5	60.7
≥ 12000	39.1	57.9	59.4	60.5	61.7	61.8	61.7	61.8	61.9	62.1	62.2	62.2	62.3	62.3	62.4	62.6
≥ 10000	40.8	60.9	62.5	63.7	64.4	64.5	64.9	65.0	65.1	65.3	65.4	65.4	65.6	65.6	65.7	65.8
≥ 9000	41.3	61.9	63.6	64.8	65.5	65.6	66.1	66.2	66.2	66.4	66.6	66.6	66.7	66.7	66.8	67.0
≥ 8000	42.3	63.8	65.6	67.0	67.7	67.9	68.3	68.4	68.5	68.7	68.8	68.8	69.0	69.0	69.1	69.3
≥ 7000	42.8	64.9	66.6	67.9	68.8	68.9	69.4	69.5	69.5	69.7	69.9	69.9	70.0	70.0	70.1	70.3
≥ 6000	43.5	65.9	67.9	69.2	70.1	70.2	70.7	70.8	70.8	71.1	71.2	71.2	71.3	71.3	71.5	71.6
≥ 5000	44.6	67.7	69.9	71.3	72.2	72.3	72.8	72.9	73.0	73.2	73.3	73.3	73.5	73.5	73.6	73.7
≥ 4500	45.2	68.7	70.8	72.3	73.2	73.4	73.9	74.0	74.0	74.3	74.4	74.4	74.5	74.5	74.7	74.8
≥ 4000	46.0	70.1	72.4	73.9	74.9	75.1	75.6	75.7	75.8	76.0	76.1	76.1	76.3	76.3	76.4	76.6
≥ 3500	46.8	71.2	73.6	75.1	76.1	76.3	76.8	76.9	77.0	77.3	77.4	77.4	77.6	77.6	77.7	77.8
≥ 3000	47.2	72.6	75.0	76.7	77.7	77.9	78.5	78.6	78.7	78.9	79.0	79.0	79.2	79.2	79.3	79.5
≥ 2500	48.0	74.2	76.8	78.6	79.7	79.8	80.4	80.5	80.6	80.9	81.0	81.0	81.2	81.2	81.3	81.5
≥ 2000	48.5	75.5	78.2	80.1	81.2	81.4	82.0	82.2	82.3	82.5	82.7	82.7	82.8	82.8	83.0	83.1
≥ 1800	48.8	76.0	78.8	80.7	81.9	82.1	82.7	82.8	82.9	83.2	83.3	83.3	83.5	83.5	83.6	83.8
≥ 1500	49.1	77.0	79.9	81.8	83.1	83.3	84.0	84.1	84.2	84.5	84.6	84.6	84.8	84.8	84.9	85.1
≥ 1200	49.5	78.3	81.3	83.4	84.9	85.1	85.8	85.9	86.0	86.3	86.5	86.5	86.6	86.6	86.8	86.9
≥ 1000	49.6	78.9	82.1	84.4	86.1	86.3	87.1	87.3	87.4	87.7	87.8	87.8	88.0	88.0	88.1	88.3
≥ 900	49.7	79.4	82.7	85.1	86.8	87.2	88.0	88.2	88.3	88.6	88.7	88.7	88.9	88.9	89.0	89.2
≥ 800	49.8	80.0	83.5	86.1	88.0	88.4	89.3	89.5	89.7	90.0	90.1	90.1	90.3	90.3	90.4	90.6
≥ 700	49.9	80.3	84.1	86.9	89.0	89.5	90.4	90.7	90.9	91.2	91.4	91.4	91.6	91.6	91.7	91.9
≥ 600	50.0	80.7	84.6	87.6	89.7	90.5	91.6	91.9	92.1	92.5	92.6	92.6	92.8	92.8	93.0	93.1
≥ 500	50.1	81.1	85.2	88.3	90.9	91.5	92.8	93.2	93.4	93.8	94.0	94.0	94.2	94.2	94.3	94.5
≥ 400	50.1	81.3	85.4	88.8	91.6	92.2	93.8	94.4	94.6	95.1	95.4	95.4	95.6	95.6	95.7	95.9
≥ 300	50.1	81.3	85.6	89.1	92.1	92.7	94.6	95.4	95.7	96.4	96.7	96.8	97.0	97.1	97.2	97.4
≥ 200	50.1	81.4	85.6	89.1	92.2	92.9	94.9	95.8	96.1	97.1	97.6	97.6	98.0	98.0	98.2	98.4
≥ 100	50.1	81.4	85.6	89.1	92.2	92.9	94.9	95.9	96.2	97.3	97.8	97.8	98.3	98.4	98.7	99.1
≥ 0	50.1	81.4	85.6	89.1	92.2	92.9	94.9	95.9	96.2	97.3	97.8	97.8	98.4	98.5	99.0	100.0

TOTAL NUMBER OF OBSERVATIONS 15595

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	37.6	51.2	52.5	53.1	53.6	53.6	54.0	54.1	54.2	54.3	54.4	54.4	54.4	54.4	54.5	54.6
≥ 20000	42.9	58.9	60.3	61.1	61.6	61.7	62.1	62.3	62.3	62.5	62.5	62.5	62.6	62.6	62.7	62.7
≥ 18000	43.1	59.2	60.6	61.4	61.9	62.0	62.4	62.6	62.6	62.8	62.8	62.8	62.9	62.9	63.0	63.0
≥ 16000	43.3	59.5	60.9	61.7	62.2	62.3	62.7	62.9	62.9	63.1	63.1	63.1	63.2	63.2	63.3	63.3
≥ 14000	44.2	60.9	62.4	63.2	63.7	63.8	64.2	64.4	64.4	64.6	64.6	64.6	64.7	64.7	64.8	64.9
≥ 12000	45.5	63.0	64.6	65.4	65.9	66.0	66.5	66.6	66.7	66.8	66.9	66.9	66.9	67.0	67.0	67.1
≥ 10000	46.9	65.5	67.1	68.0	68.6	68.7	69.1	69.3	69.4	69.5	69.6	69.6	69.7	69.7	69.8	69.8
≥ 9000	47.3	66.4	68.0	68.9	69.5	69.6	70.0	70.2	70.3	70.5	70.5	70.5	70.6	70.6	70.7	70.7
≥ 8000	48.3	68.5	70.2	71.1	71.8	71.9	72.4	72.5	72.6	72.8	72.8	72.8	72.9	72.9	73.0	73.1
≥ 7000	48.9	69.8	71.5	72.5	73.2	73.3	73.8	74.0	74.0	74.2	74.3	74.3	74.3	74.3	74.4	74.5
≥ 6000	49.4	70.8	72.6	73.6	74.3	74.4	74.9	75.1	75.1	75.3	75.4	75.4	75.4	75.5	75.6	75.6
≥ 5000	50.1	72.0	74.0	75.0	75.8	75.9	76.4	76.6	76.7	76.9	76.9	76.9	77.0	77.0	77.1	77.2
≥ 4500	50.5	72.8	74.8	75.9	76.6	76.7	77.3	77.5	77.5	77.7	77.8	77.8	77.9	77.9	78.0	78.1
≥ 4000	51.3	74.3	76.5	77.6	78.4	78.5	79.0	79.3	79.3	79.5	79.6	79.6	79.7	79.7	79.8	79.9
≥ 3500	51.9	75.4	77.7	78.8	79.6	79.7	80.3	80.6	80.6	80.8	80.9	80.9	80.9	81.0	81.1	81.2
≥ 3000	52.5	76.7	79.1	80.3	81.2	81.3	81.9	82.2	82.2	82.5	82.5	82.5	82.6	82.6	82.7	82.8
≥ 2500	53.3	78.4	80.8	82.1	83.1	83.2	83.9	84.2	84.2	84.4	84.5	84.5	84.6	84.6	84.7	84.8
≥ 2000	53.9	79.8	82.4	83.7	84.7	84.9	85.5	85.8	85.9	86.1	86.2	86.2	86.2	86.3	86.4	86.5
≥ 1800	54.0	80.2	82.8	84.2	85.2	85.3	86.0	86.3	86.3	86.6	86.7	86.7	86.7	86.8	86.9	87.0
≥ 1500	54.3	81.1	83.8	85.2	86.3	86.4	87.1	87.5	87.5	87.8	87.9	87.9	87.9	88.0	88.1	88.2
≥ 1200	54.6	82.2	85.1	86.6	87.7	87.9	88.6	88.9	89.0	89.3	89.4	89.4	89.4	89.4	89.5	89.6
≥ 1000	54.7	83.0	86.0	87.6	88.8	89.0	89.8	90.2	90.2	90.5	90.6	90.6	90.7	90.7	90.8	90.9
≥ 900	54.8	83.4	86.5	88.2	89.5	89.7	90.5	90.9	91.0	91.3	91.4	91.4	91.4	91.5	91.6	91.7
≥ 800	54.9	83.9	87.2	89.0	90.3	90.6	91.4	91.8	91.9	92.2	92.3	92.3	92.3	92.4	92.5	92.6
≥ 700	54.9	84.4	87.8	89.7	91.2	91.5	92.4	92.9	92.9	93.2	93.3	93.3	93.4	93.4	93.5	93.6
≥ 600	54.9	84.7	88.3	90.3	92.0	92.3	93.4	93.8	93.9	94.2	94.3	94.3	94.4	94.4	94.5	94.6
≥ 500	55.0	85.0	88.7	90.8	92.8	93.2	94.4	95.0	95.1	95.4	95.6	95.6	95.6	95.7	95.8	95.9
≥ 400	55.0	85.1	89.0	91.3	93.6	94.0	95.4	96.1	96.3	96.7	96.9	96.9	97.0	97.0	97.1	97.2
≥ 300	55.0	85.2	89.2	91.6	94.0	94.5	96.1	96.9	97.1	97.7	97.9	97.9	98.1	98.1	98.2	98.3
≥ 200	55.0	85.2	89.2	91.6	94.1	94.7	96.3	97.3	97.5	98.2	98.6	98.6	98.8	98.8	99.0	99.1
≥ 100	55.0	85.2	89.2	91.6	94.1	94.7	96.3	97.3	97.5	98.3	98.8	98.8	99.1	99.2	99.5	99.7
≥ 0	55.0	85.2	89.2	91.6	94.1	94.7	96.3	97.3	97.5	98.3	98.8	98.9	99.2	99.3	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 16652

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	42.2	57.4	58.5	59.3	59.7	59.7	59.9	60.0	60.0	60.3	60.3	60.3	60.5	60.5	60.7	60.7
≥ 20000	47.9	65.7	67.0	67.8	68.2	68.3	68.5	68.6	68.6	68.9	69.0	69.0	69.1	69.2	69.3	69.4
≥ 18000	48.1	65.9	67.1	67.9	68.4	68.4	68.7	68.8	68.8	69.0	69.2	69.2	69.3	69.3	69.5	69.6
≥ 16000	48.2	66.2	67.4	68.2	68.6	68.7	68.9	69.0	69.0	69.3	69.4	69.4	69.5	69.6	69.7	69.8
≥ 14000	49.1	67.5	68.8	69.6	70.1	70.1	70.3	70.4	70.5	70.7	70.8	70.8	71.0	71.0	71.2	71.3
≥ 12000	50.1	69.6	70.9	71.7	72.2	72.2	72.5	72.6	72.6	72.9	73.0	73.0	73.1	73.2	73.3	73.4
≥ 10000	51.6	72.2	73.6	74.5	75.0	75.0	75.3	75.4	75.4	75.7	75.8	75.8	75.9	76.0	76.1	76.2
≥ 9000	52.1	73.1	74.5	75.4	75.9	76.0	76.2	76.3	76.4	76.6	76.7	76.7	76.9	76.9	77.1	77.2
≥ 8000	53.0	74.8	76.4	77.3	77.8	77.9	78.2	78.3	78.3	78.5	78.7	76.7	78.8	78.8	79.0	79.1
≥ 7000	53.6	76.0	77.5	78.5	79.0	79.1	79.4	79.5	79.5	79.7	79.9	79.9	80.0	80.0	80.2	80.3
≥ 6000	54.0	76.8	78.4	79.4	79.9	80.0	80.3	80.4	80.4	80.7	80.8	80.8	80.9	81.0	81.1	81.2
≥ 5000	54.5	77.8	79.4	80.4	81.0	81.0	81.3	81.4	81.4	81.7	81.8	81.8	82.0	82.0	82.2	82.3
≥ 4500	54.9	78.5	80.1	81.1	81.7	81.8	82.1	82.2	82.2	82.5	82.6	82.6	82.8	82.8	82.9	83.0
≥ 4000	55.6	79.7	81.5	82.5	83.1	83.2	83.5	83.6	83.6	83.9	84.0	84.0	84.2	84.2	84.3	84.5
≥ 3500	56.3	80.8	82.6	83.7	84.3	84.4	84.7	84.8	84.8	85.1	85.2	85.2	85.4	85.4	85.6	85.7
≥ 3000	57.3	82.6	84.4	85.5	86.2	86.3	86.6	86.7	86.7	87.0	87.1	87.1	87.3	87.3	87.5	87.6
≥ 2500	58.1	84.2	86.2	87.4	88.1	88.2	88.5	88.6	88.7	88.9	89.1	89.1	89.2	89.3	89.4	89.5
≥ 2000	58.9	85.8	87.9	89.1	89.9	90.0	90.3	90.4	90.4	90.7	90.9	90.9	91.0	91.0	91.2	91.3
≥ 1800	59.1	86.2	88.3	89.5	90.3	90.4	90.8	90.9	90.9	91.2	91.3	91.3	91.5	91.5	91.6	91.7
≥ 1500	59.3	87.1	89.3	90.5	91.4	91.4	91.8	91.9	92.0	92.2	92.4	92.4	92.5	92.5	92.7	92.8
≥ 1200	59.5	87.9	90.2	91.5	92.4	92.5	92.8	93.0	93.0	93.3	93.4	93.4	93.6	93.6	93.8	93.9
≥ 1000	59.6	88.6	91.0	92.4	93.4	93.5	93.9	94.0	94.0	94.3	94.4	94.4	94.6	94.6	94.8	94.9
≥ 900	59.7	89.2	91.7	93.2	94.3	94.4	94.8	94.9	94.9	95.2	95.4	95.4	95.5	95.6	95.7	95.8
≥ 800	59.8	89.5	92.2	93.8	94.9	95.0	95.4	95.5	95.6	95.9	96.0	96.0	96.2	96.2	96.4	96.5
≥ 700	59.8	89.7	92.5	94.2	95.4	95.5	96.0	96.1	96.1	96.5	96.6	96.6	96.8	96.8	97.0	97.1
≥ 600	59.8	90.0	92.9	94.7	96.0	96.1	96.6	96.7	96.8	97.1	97.3	97.3	97.4	97.5	97.6	97.7
≥ 500	59.9	90.2	93.1	95.0	96.3	96.5	97.0	97.2	97.2	97.6	97.8	97.8	98.0	98.0	98.1	98.3
≥ 400	59.9	90.3	93.2	95.1	96.6	96.8	97.5	97.7	97.8	98.2	98.4	98.4	98.6	98.6	98.8	98.9
≥ 300	59.9	90.3	93.3	95.2	96.8	97.0	97.7	98.0	98.1	98.6	98.8	98.8	99.0	99.0	99.2	99.3
≥ 200	59.9	90.3	93.3	95.2	96.8	97.1	97.8	98.1	98.2	98.8	99.0	99.0	99.3	99.3	99.5	99.7
≥ 100	59.9	90.3	93.3	95.2	96.8	97.1	97.8	98.1	98.2	98.8	99.1	99.1	99.4	99.4	99.6	99.8
0	59.9	90.3	93.3	95.2	96.8	97.1	97.8	98.1	98.2	98.8	99.1	99.1	99.4	99.4	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 15365

USAFETAC FORM AX 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (L.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	37.8	56.1	58.0	58.8	59.4	59.5	59.9	60.0	60.1	60.3	60.4	60.4	60.5	60.5	60.6	60.7
≥ 20000	43.0	64.1	66.1	67.1	67.8	67.9	68.4	68.5	68.6	68.8	68.9	68.9	69.0	69.0	69.1	69.3
≥ 18000	43.2	64.5	66.5	67.4	68.2	68.3	68.7	68.9	68.9	69.2	69.3	69.3	69.4	69.4	69.5	69.6
≥ 16000	43.3	64.6	66.7	67.6	68.3	68.4	68.9	69.0	69.1	69.3	69.4	69.4	69.5	69.5	69.6	69.8
≥ 14000	44.1	65.8	67.9	68.9	69.6	69.7	70.2	70.3	70.4	70.6	70.7	70.7	70.8	70.8	71.0	71.1
≥ 12000	45.3	68.0	70.1	71.1	71.9	72.0	72.5	72.6	72.7	72.9	73.0	73.0	73.1	73.1	73.3	73.4
≥ 10000	46.7	70.5	72.7	73.8	74.6	74.7	75.2	75.3	75.4	75.7	75.8	75.8	75.9	75.9	76.0	76.2
≥ 9000	47.1	71.2	73.5	74.6	75.4	75.5	76.0	76.2	76.2	76.5	76.6	76.6	76.7	76.7	76.9	77.0
≥ 8000	47.9	72.7	75.1	76.2	77.0	77.2	77.7	77.8	77.9	78.2	78.3	78.3	78.4	78.4	78.6	78.7
≥ 7000	48.4	73.7	76.1	77.2	78.1	78.3	78.8	78.9	79.0	79.2	79.4	79.4	79.5	79.5	79.6	79.8
≥ 6000	48.7	74.5	77.0	78.1	79.0	79.2	79.7	79.8	79.9	80.2	80.3	80.3	80.4	80.4	80.5	80.7
≥ 5000	49.1	75.4	78.0	79.1	80.0	80.2	80.7	80.8	80.9	81.2	81.3	81.3	81.4	81.4	81.6	81.7
≥ 4500	49.4	75.9	78.5	79.6	80.5	80.7	81.2	81.4	81.4	81.7	81.8	81.9	81.9	82.0	82.1	82.2
≥ 4000	50.1	77.2	79.9	81.0	81.9	82.1	82.6	82.8	82.9	83.1	83.3	83.3	83.4	83.4	83.5	83.6
≥ 3500	50.8	78.4	81.1	82.3	83.3	83.4	84.0	84.1	84.2	84.5	84.6	84.6	84.7	84.7	84.9	85.0
≥ 3000	52.2	80.7	83.5	84.9	85.9	86.0	86.6	86.7	86.8	87.1	87.2	87.2	87.3	87.4	87.5	87.6
≥ 2500	53.6	83.1	86.0	87.4	88.5	88.6	89.2	89.4	89.5	89.7	89.9	89.9	90.0	90.0	90.1	90.3
≥ 2000	54.4	84.5	87.6	89.0	90.1	90.3	90.9	91.1	91.2	91.5	91.6	91.6	91.7	91.7	91.9	92.0
≥ 1800	54.6	85.0	88.1	89.6	90.7	90.9	91.5	91.7	91.8	92.1	92.2	92.2	92.3	92.3	92.5	92.6
≥ 1500	55.0	86.1	89.4	90.9	92.1	92.4	93.0	93.2	93.3	93.6	93.8	93.8	93.9	93.9	94.0	94.1
≥ 1200	55.4	86.9	90.3	92.0	93.3	93.5	94.2	94.4	94.5	94.8	95.0	95.0	95.1	95.1	95.2	95.3
≥ 1000	55.5	87.5	91.0	92.7	94.1	94.4	95.1	95.3	95.4	95.7	95.9	95.9	96.0	96.0	96.1	96.3
≥ 900	55.6	87.7	91.3	93.1	94.5	94.7	95.5	95.7	95.8	96.2	96.3	96.3	96.4	96.4	96.6	96.7
≥ 800	55.6	88.1	91.8	93.6	95.0	95.3	96.1	96.3	96.4	96.8	97.0	97.0	97.1	97.1	97.2	97.4
≥ 700	55.7	88.4	92.2	94.1	95.6	95.9	96.7	97.0	97.1	97.5	97.6	97.6	97.7	97.7	97.9	98.0
≥ 600	55.7	88.6	92.5	94.4	96.0	96.3	97.1	97.4	97.5	97.9	98.1	98.1	98.2	98.2	98.3	98.5
≥ 500	55.7	88.7	92.7	94.6	96.3	96.6	97.4	97.8	97.9	98.3	98.5	98.5	98.6	98.6	98.8	98.9
≥ 400	55.7	88.8	92.8	94.8	96.5	96.8	97.7	98.1	98.2	98.7	98.9	98.9	99.0	99.0	99.2	99.3
≥ 300	55.7	88.9	92.8	94.9	96.6	96.9	97.9	98.3	98.4	98.9	99.1	99.2	99.3	99.3	99.5	99.6
≥ 200	55.7	88.9	92.8	94.9	96.6	96.9	97.9	98.4	98.5	99.0	99.2	99.2	99.4	99.4	99.6	99.8
≥ 100	55.7	88.9	92.8	94.9	96.6	96.9	97.9	98.4	98.5	99.0	99.2	99.3	99.4	99.4	99.7	99.8
≥ 0	55.7	88.9	92.8	94.9	96.6	96.9	97.9	98.4	98.5	99.0	99.2	99.3	99.4	99.4	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 16697

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	34.7	51.9	53.1	54.0	54.6	54.7	54.9	55.0	55.1	55.2	55.2	55.2	55.3	55.3	55.3	55.3
≥ 20000	42.0	62.8	64.2	65.2	65.8	66.0	66.2	66.3	66.4	66.5	66.6	66.6	66.6	66.6	66.6	66.7
≥ 18000	42.2	63.1	64.6	65.6	66.2	66.3	66.5	66.7	66.7	66.8	66.9	66.9	66.9	67.0	67.0	67.0
≥ 16000	42.3	63.3	64.8	65.8	66.4	66.6	66.8	66.9	67.0	67.1	67.1	67.1	67.2	67.2	67.2	67.3
≥ 14000	43.5	64.8	66.3	67.3	68.0	68.1	68.3	68.5	68.5	68.6	68.7	68.7	68.7	68.8	68.8	68.8
≥ 12000	45.0	67.5	69.1	70.1	70.8	70.9	71.1	71.3	71.3	71.5	71.5	71.5	71.6	71.6	71.6	71.7
≥ 10000	46.4	70.6	72.2	73.3	74.0	74.1	74.4	74.5	74.6	74.7	74.8	74.8	74.9	74.9	74.9	75.0
≥ 9000	46.9	71.6	73.3	74.4	75.0	75.2	75.4	75.6	75.6	75.8	75.9	75.9	75.9	75.9	76.0	76.0
≥ 8000	47.6	73.2	75.0	76.1	76.8	77.0	77.2	77.4	77.5	77.7	77.7	77.7	77.8	77.8	77.8	77.9
≥ 7000	47.9	73.9	75.7	76.8	77.6	77.7	78.0	78.2	78.2	78.4	78.5	78.5	78.5	78.5	78.6	78.6
≥ 6000	48.2	74.4	76.2	77.4	78.2	78.4	78.6	78.8	78.8	79.0	79.1	79.1	79.2	79.2	79.2	79.3
≥ 5000	48.6	75.1	76.9	78.1	78.9	79.1	79.3	79.5	79.6	79.8	79.8	79.8	79.9	79.9	79.9	80.0
≥ 4500	48.8	75.5	77.3	78.6	79.3	79.5	79.8	80.0	80.0	80.2	80.3	80.3	80.3	80.3	80.4	80.4
≥ 4000	49.4	76.5	78.4	79.7	80.5	80.7	80.9	81.1	81.2	81.4	81.4	81.4	81.5	81.5	81.5	81.6
≥ 3500	50.2	78.1	80.1	81.3	82.2	82.3	82.6	82.8	82.8	83.0	83.1	83.1	83.2	83.2	83.2	83.3
≥ 3000	52.1	80.8	82.8	84.2	85.1	85.3	85.5	85.7	85.8	86.0	86.0	86.0	86.1	86.1	86.2	86.2
≥ 2500	54.5	84.7	86.9	88.3	89.3	89.4	89.7	89.9	90.0	90.2	90.2	90.2	90.3	90.3	90.4	90.4
≥ 2000	55.6	87.0	89.3	90.8	91.8	92.0	92.3	92.5	92.5	92.7	92.8	92.8	92.9	92.9	92.9	93.0
≥ 1800	56.0	87.8	90.1	91.7	92.7	92.9	93.2	93.4	93.4	93.6	93.7	93.7	93.8	93.8	93.8	93.9
≥ 1500	56.5	88.8	91.2	92.8	93.9	94.1	94.4	94.6	94.7	94.9	95.0	95.0	95.0	95.1	95.1	95.2
≥ 1200	57.0	89.9	92.4	94.1	95.2	95.4	95.8	96.0	96.0	96.3	96.3	95.3	96.4	96.4	96.5	96.5
≥ 1000	57.1	90.4	92.9	94.6	95.8	96.0	96.3	96.6	96.6	96.8	96.9	96.9	97.0	97.0	97.1	97.1
≥ 900	57.2	90.7	93.3	95.0	96.2	96.4	96.8	97.0	97.0	97.3	97.4	97.4	97.5	97.5	97.5	97.6
≥ 800	57.3	90.9	93.6	95.3	96.5	96.8	97.2	97.4	97.5	97.7	97.8	97.8	97.9	97.9	98.0	98.0
≥ 700	57.3	91.2	93.8	95.6	96.9	97.1	97.5	97.8	97.8	98.1	98.2	98.2	98.3	98.3	98.3	98.4
≥ 600	57.3	91.3	94.0	95.8	97.1	97.4	97.8	98.0	98.1	98.3	98.4	98.4	98.5	98.5	98.6	98.6
≥ 500	57.3	91.5	94.2	96.1	97.4	97.7	98.1	98.4	98.5	98.8	98.9	98.9	99.0	99.0	99.0	99.1
≥ 400	57.3	91.5	94.3	96.2	97.6	97.8	98.3	98.6	98.6	98.9	99.1	99.1	99.2	99.2	99.2	99.3
≥ 300	57.3	91.5	94.4	96.3	97.7	98.0	98.5	98.8	98.8	99.2	99.3	99.3	99.4	99.4	99.5	99.6
≥ 200	57.3	91.5	94.4	96.3	97.7	98.0	98.5	98.8	98.9	99.3	99.5	99.5	99.6	99.6	99.7	99.8
≥ 100	57.3	91.5	94.4	96.3	97.7	98.0	98.5	98.8	98.9	99.3	99.5	99.5	99.6	99.6	99.8	99.9
0	57.3	91.5	94.4	96.3	97.7	98.0	98.5	98.8	98.9	99.3	99.5	99.5	99.6	99.6	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 15427

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

ALL (HOURS (L S T))

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	37.3	50.9	52.0	52.7	53.1	53.2	53.3	53.4	53.4	53.5	53.5	53.5	53.5	53.6	53.6	53.6
≥ 20000	45.5	62.8	64.0	64.8	65.3	65.4	65.6	65.6	65.6	65.7	65.7	65.7	65.8	65.8	65.8	65.8
≥ 18000	45.8	63.1	64.4	65.2	65.6	65.7	65.9	66.0	66.0	66.0	66.1	66.1	66.1	66.1	66.1	66.2
≥ 16000	46.2	63.7	64.9	65.7	66.2	66.2	66.4	66.5	66.5	66.6	66.6	66.6	66.7	66.7	66.7	66.7
≥ 14000	47.9	66.0	67.2	68.0	68.5	68.6	68.8	68.8	68.9	68.9	69.0	69.0	69.0	69.0	69.0	69.1
≥ 12000	50.1	69.5	70.8	71.6	72.1	72.2	72.4	72.4	72.5	72.5	72.6	72.6	72.6	72.6	72.6	72.7
≥ 10000	52.1	73.4	74.8	75.7	76.2	76.3	76.5	76.6	76.6	76.7	76.8	76.8	76.8	76.8	76.9	76.9
≥ 9000	52.6	74.4	75.9	76.7	77.3	77.4	77.6	77.7	77.7	77.9	77.9	77.9	77.9	78.0	78.0	78.0
≥ 8000	53.2	76.1	77.6	78.5	79.1	79.2	79.4	79.5	79.5	79.6	79.7	79.7	79.7	79.7	79.8	79.8
≥ 7000	53.6	76.7	78.3	79.2	79.8	79.9	80.1	80.2	80.2	80.3	80.4	80.4	80.4	80.4	80.4	80.5
≥ 6000	53.8	77.1	78.7	79.6	80.2	80.3	80.5	80.6	80.7	80.8	80.8	80.8	80.8	80.9	80.9	80.9
≥ 5000	54.1	77.8	79.4	80.3	81.0	81.0	81.3	81.4	81.4	81.5	81.6	81.6	81.6	81.6	81.7	81.7
≥ 4500	54.3	78.2	79.8	80.8	81.4	81.5	81.8	81.9	81.9	82.0	82.0	82.0	82.1	82.1	82.1	82.1
≥ 4000	54.8	79.0	80.8	81.7	82.4	82.4	82.7	82.8	82.8	83.0	83.0	83.0	83.0	83.1	83.1	83.1
≥ 3500	55.6	80.3	82.2	83.1	83.8	83.8	84.1	84.2	84.3	84.4	84.4	84.4	84.5	84.5	84.5	84.5
≥ 3000	57.8	83.6	85.6	86.6	87.3	87.4	87.7	87.8	87.9	88.0	88.0	88.0	88.1	88.1	88.1	88.1
≥ 2500	60.0	87.3	89.4	90.5	91.3	91.4	91.7	91.8	91.8	92.0	92.0	92.0	92.1	92.1	92.1	92.1
≥ 2000	61.1	89.4	91.6	92.7	93.5	93.6	94.0	94.1	94.1	94.3	94.3	94.3	94.3	94.4	94.4	94.4
≥ 1800	61.4	89.9	92.1	93.3	94.1	94.2	94.5	94.7	94.7	94.8	94.9	94.9	94.9	94.9	95.0	95.0
≥ 1500	61.8	90.7	93.1	94.3	95.1	95.2	95.6	95.8	95.8	96.0	96.0	96.0	96.1	96.1	96.1	96.1
≥ 1200	62.2	91.6	94.0	95.2	96.1	96.2	96.6	96.8	96.8	97.0	97.0	97.0	97.1	97.1	97.1	97.1
≥ 1000	62.3	91.9	94.4	95.6	96.6	96.7	97.1	97.3	97.3	97.5	97.5	97.5	97.6	97.6	97.6	97.7
≥ 900	62.3	92.0	94.6	95.8	96.8	96.9	97.3	97.5	97.5	97.7	97.7	97.7	97.8	97.8	97.9	97.9
≥ 800	62.4	92.3	94.8	96.1	97.1	97.2	97.7	97.9	97.9	98.1	98.1	98.1	98.2	98.2	98.2	98.3
≥ 700	62.5	92.5	95.1	96.4	97.4	97.5	98.0	98.2	98.2	98.4	98.4	98.4	98.5	98.5	98.6	98.6
≥ 600	62.5	92.6	95.2	96.6	97.6	97.7	98.2	98.4	98.5	98.7	98.7	98.7	98.8	98.8	98.8	98.9
≥ 500	62.5	92.8	95.5	96.8	97.9	98.1	98.6	98.8	98.9	99.1	99.1	99.1	99.2	99.3	99.3	99.3
≥ 400	62.6	92.9	95.6	97.0	98.1	98.3	98.9	99.1	99.1	99.3	99.4	99.4	99.5	99.5	99.6	99.6
≥ 300	62.6	93.0	95.7	97.1	98.2	98.4	99.0	99.2	99.3	99.5	99.6	99.6	99.7	99.8	99.8	99.8
≥ 200	62.6	93.0	95.7	97.1	98.3	98.5	99.1	99.3	99.4	99.6	99.7	99.7	99.9	99.9	99.9	99.9
≥ 100	62.6	93.0	95.7	97.1	98.3	98.5	99.1	99.3	99.4	99.6	99.7	99.7	99.9	99.9	99.9	100.0
≥ 0	62.6	93.0	95.7	97.1	98.3	98.5	99.1	99.3	99.4	99.6	99.7	99.7	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 15928

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	34.8	52.4	54.4	55.5	56.1	56.2	56.6	56.8	56.8	56.9	56.9	56.9	57.0	57.0	57.0	57.1
≥ 20000	42.4	63.7	66.1	67.3	68.0	68.1	68.5	68.7	68.8	68.9	69.0	69.0	69.0	69.0	69.1	69.1
≥ 18000	42.6	64.0	66.4	67.5	68.2	68.4	68.7	69.0	69.0	69.1	69.2	69.2	69.3	69.3	69.3	69.3
≥ 16000	42.7	64.2	66.6	67.8	68.5	68.6	69.0	69.2	69.3	69.4	69.5	69.5	69.5	69.5	69.6	69.6
≥ 14000	43.6	65.7	68.2	69.3	70.0	70.2	70.6	70.8	70.9	71.0	71.0	71.0	71.1	71.1	71.1	71.2
≥ 12000	45.3	68.4	71.1	72.3	73.0	73.1	73.5	73.8	73.8	74.0	74.0	74.0	74.1	74.1	74.1	74.2
≥ 10000	47.3	72.3	75.1	76.4	77.2	77.3	77.7	78.0	78.0	78.1	78.2	78.2	78.3	78.3	78.3	78.4
≥ 9000	47.7	73.0	75.9	77.2	78.0	78.2	78.6	78.8	78.9	79.0	79.1	79.1	79.2	79.2	79.2	79.3
≥ 8000	48.5	74.7	77.6	79.0	79.8	80.0	80.4	80.6	80.7	80.8	80.9	80.9	81.0	81.0	81.0	81.1
≥ 7000	48.7	75.3	78.3	79.7	80.5	80.7	81.1	81.3	81.4	81.5	81.6	81.6	81.7	81.7	81.7	81.8
≥ 6000	48.9	75.7	78.7	80.1	80.9	81.1	81.5	81.8	81.8	82.0	82.0	82.1	82.1	82.1	82.2	82.2
≥ 5000	49.2	76.2	79.3	80.8	81.6	81.8	82.2	82.5	82.5	82.7	82.7	82.8	82.8	82.8	82.9	82.9
≥ 4500	49.4	76.5	79.6	81.0	81.9	82.1	82.5	82.8	82.8	83.0	83.1	83.1	83.2	83.2	83.2	83.2
≥ 4000	49.8	77.3	80.4	81.8	82.7	82.9	83.3	83.6	83.7	83.8	83.9	83.9	84.0	84.0	84.0	84.1
≥ 3500	50.4	78.4	81.6	83.0	83.9	84.1	84.3	84.8	84.9	85.0	85.1	85.1	85.2	85.2	85.2	85.3
≥ 3000	52.2	81.4	84.6	86.1	87.0	87.3	87.7	88.0	88.0	88.2	88.3	88.3	88.4	88.4	88.4	88.5
≥ 2500	54.1	84.6	88.1	89.7	90.7	90.9	91.4	91.7	91.7	91.9	92.0	92.0	92.1	92.1	92.1	92.1
≥ 2000	54.9	86.1	89.7	91.4	92.4	92.7	93.1	93.4	93.5	93.7	93.8	93.8	93.9	93.9	93.9	94.0
≥ 1800	55.1	86.5	90.1	91.8	92.8	93.1	93.6	93.9	93.9	94.1	94.2	94.2	94.3	94.3	94.3	94.4
≥ 1500	55.4	87.2	90.9	92.7	93.9	94.1	94.6	94.9	95.0	95.2	95.3	95.3	95.4	95.4	95.4	95.5
≥ 1200	55.6	87.8	91.6	93.5	94.7	94.9	95.4	95.8	95.8	96.1	96.2	96.2	96.3	96.3	96.3	96.4
≥ 1000	55.7	88.2	92.1	94.0	95.2	95.5	96.0	96.3	96.4	96.7	96.8	96.8	96.9	96.9	96.9	97.0
≥ 900	55.7	88.4	92.3	94.2	95.4	95.7	96.2	96.6	96.7	97.0	97.1	97.1	97.2	97.2	97.2	97.2
≥ 800	55.8	88.6	92.5	94.5	95.8	96.0	96.6	96.9	97.0	97.3	97.4	97.4	97.5	97.5	97.6	97.6
≥ 700	55.8	88.8	92.7	94.7	96.1	96.3	96.9	97.3	97.4	97.7	97.8	97.8	97.9	97.9	97.9	98.0
≥ 600	55.8	88.9	92.9	94.9	96.3	96.6	97.2	97.6	97.8	98.1	98.2	98.2	98.3	98.3	98.3	98.4
≥ 500	55.8	89.1	93.1	95.2	96.6	96.9	97.6	98.1	98.2	98.5	98.6	98.6	98.8	98.8	98.8	98.8
≥ 400	55.9	89.2	93.3	95.3	96.8	97.1	97.9	98.4	98.5	98.9	99.0	99.0	99.1	99.1	99.2	99.2
≥ 300	55.9	89.3	93.3	95.4	97.0	97.3	98.1	98.6	98.7	99.2	99.3	99.3	99.5	99.5	99.5	99.6
≥ 200	55.9	89.3	93.4	95.4	97.0	97.3	98.1	98.7	98.8	99.3	99.5	99.5	99.6	99.6	99.7	99.8
≥ 100	55.9	89.3	93.4	95.4	97.0	97.3	98.1	98.7	98.8	99.3	99.5	99.5	99.7	99.7	99.8	99.8
0	55.9	89.3	93.4	95.4	97.0	97.3	98.1	98.7	98.8	99.3	99.5	99.5	99.7	99.7	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 15953

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	27.1	44.2	46.8	48.3	49.3	49.5	50.1	50.3	50.4	50.6	50.8	50.8	51.0	51.0	51.0	51.2
≥ 20000	32.5	52.7	55.7	57.3	58.4	58.6	59.2	59.5	59.5	59.8	60.0	60.0	60.2	60.2	60.2	60.5
≥ 18000	32.6	53.0	55.9	57.5	58.6	58.8	59.4	59.7	59.7	60.0	60.2	60.2	60.4	60.4	60.5	60.7
≥ 16000	32.7	53.1	56.0	57.7	58.8	58.9	59.5	59.8	59.9	60.1	60.4	60.4	60.5	60.5	60.6	60.8
≥ 14000	33.4	54.6	57.6	59.3	60.4	60.6	61.2	61.5	61.5	61.8	62.0	62.0	62.2	62.2	62.3	62.5
≥ 12000	35.0	57.4	60.3	62.2	63.4	63.6	64.2	64.5	64.5	64.8	65.0	65.0	65.2	65.2	65.3	65.5
≥ 10000	37.1	60.8	64.2	66.1	67.3	67.6	68.2	68.5	68.5	68.9	69.1	69.1	69.3	69.3	69.4	69.6
≥ 9000	37.7	62.0	65.5	67.4	68.6	68.9	69.5	69.8	69.8	70.2	70.4	70.4	70.6	70.6	70.7	70.9
≥ 8000	38.5	62.9	67.4	69.4	70.7	70.9	71.6	71.9	71.9	72.3	72.5	72.5	72.7	72.7	72.8	73.0
≥ 7000	39.1	64.8	68.4	70.4	71.7	71.9	72.6	72.9	73.0	73.3	73.5	73.5	73.7	73.7	73.8	74.0
≥ 6000	39.4	65.4	69.0	71.1	72.4	72.6	73.3	73.6	73.7	74.0	74.2	74.3	74.4	74.5	74.5	74.8
≥ 5000	39.9	66.2	69.9	72.0	73.4	73.6	74.3	74.6	74.7	75.0	75.2	75.3	75.4	75.5	75.5	75.8
≥ 4500	40.1	66.5	70.3	72.4	73.7	73.9	74.6	75.0	75.0	75.4	75.6	75.6	75.8	75.8	75.9	76.1
≥ 4000	40.5	67.5	71.2	73.3	74.7	74.9	75.6	76.0	76.0	76.4	76.6	76.6	76.8	76.8	76.9	77.1
≥ 3500	41.1	68.4	72.2	74.4	75.7	75.9	76.6	77.0	77.1	77.4	77.6	77.6	77.8	77.8	77.9	78.1
≥ 3000	42.6	70.9	74.8	77.0	78.4	78.6	79.3	79.7	79.8	80.1	80.3	80.3	80.5	80.5	80.6	80.9
≥ 2500	44.5	74.5	78.6	80.9	82.3	82.6	83.3	83.7	83.8	84.1	84.3	84.4	84.5	84.6	84.7	84.9
≥ 2000	45.8	77.0	81.3	83.7	85.2	85.5	86.3	86.7	86.7	87.1	87.3	87.3	87.5	87.6	87.7	87.9
≥ 1800	46.0	77.6	81.9	84.3	85.8	86.1	86.9	87.3	87.4	87.7	88.0	88.0	88.2	88.2	88.3	88.5
≥ 1500	46.6	79.1	83.6	86.1	87.7	88.0	88.8	89.2	89.3	89.7	89.9	89.9	90.1	90.1	90.2	90.5
≥ 1200	47.1	80.5	85.1	87.7	89.3	89.6	90.5	90.9	91.0	91.4	91.6	91.6	91.9	91.9	92.0	92.2
≥ 1000	47.4	81.3	86.0	88.7	90.5	90.8	91.7	92.2	92.2	92.6	92.9	92.9	93.1	93.1	93.2	93.4
≥ 900	47.5	81.7	86.6	89.3	91.2	91.5	92.4	92.9	92.9	93.3	93.6	93.6	93.8	93.8	93.9	94.1
≥ 800	47.5	82.2	87.2	90.0	91.9	92.3	93.2	93.7	93.7	94.2	94.4	94.4	94.6	94.7	94.8	95.0
≥ 700	47.6	82.8	87.9	90.8	92.8	93.2	94.2	94.7	94.7	95.2	95.4	95.4	95.6	95.6	95.7	96.0
≥ 600	47.7	83.1	88.3	91.3	93.5	93.8	94.9	95.5	95.5	96.0	96.2	96.2	96.5	96.5	96.6	96.8
≥ 500	47.7	83.5	88.8	91.9	94.2	94.6	95.8	96.4	96.5	97.0	97.3	97.3	97.5	97.5	97.6	97.8
≥ 400	47.7	83.6	89.0	92.1	94.5	94.9	96.2	96.9	97.0	97.5	97.7	97.8	98.0	98.0	98.2	98.4
≥ 300	47.7	83.7	89.2	92.4	94.8	95.4	96.7	97.4	97.6	98.2	98.4	98.5	98.7	98.8	98.9	99.2
≥ 200	47.7	83.7	89.2	92.4	94.9	95.5	96.9	97.6	97.7	98.3	98.6	98.7	99.0	99.0	99.2	99.5
≥ 100	47.7	83.7	89.2	92.4	94.9	95.5	96.9	97.6	97.7	98.4	98.7	98.7	99.1	99.1	99.3	99.7
≥ 0	47.7	83.7	89.2	92.4	94.9	95.5	96.9	97.6	97.7	98.4	98.7	98.7	99.1	99.1	99.4	100.0

TOTAL NUMBER OF OBSERVATIONS 15650

USAFETAC FORM XX 6/ 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	32.6	55.4	58.1	59.6	61.0	61.1	61.7	62.0	62.1	62.7	62.8	62.8	63.0	63.0	63.3	63.5
≥ 20000	35.5	60.1	63.0	64.5	66.0	66.2	66.8	67.1	67.2	67.8	68.0	68.0	68.2	68.2	68.5	68.8
≥ 18000	35.6	60.4	63.2	64.8	66.2	66.4	67.0	67.4	67.4	68.0	68.2	68.2	68.4	68.4	68.7	69.0
≥ 16000	35.7	60.5	63.3	64.9	66.4	66.5	67.2	67.5	67.6	68.2	68.4	68.4	68.5	68.6	68.8	69.2
≥ 14000	36.1	61.2	64.0	65.7	67.2	67.3	68.0	68.3	68.4	69.0	69.2	69.2	69.4	69.4	69.7	70.0
≥ 12000	37.3	63.0	65.9	67.5	69.0	69.2	69.9	70.2	70.3	70.9	71.1	71.1	71.3	71.3	71.6	71.9
≥ 10000	38.6	65.8	68.9	70.6	72.2	72.4	73.1	73.4	73.5	74.1	74.3	74.3	74.5	74.6	74.8	75.2
≥ 9000	38.9	66.6	69.8	71.5	73.1	73.3	74.0	74.3	74.4	75.0	75.2	75.2	75.4	75.5	75.7	76.1
≥ 8000	39.6	68.2	71.5	73.2	74.9	75.1	75.8	76.1	76.2	76.8	77.0	77.0	77.3	77.3	77.6	77.9
≥ 7000	39.9	68.9	72.1	73.9	75.6	75.7	76.5	76.9	76.9	77.5	77.8	77.8	78.0	78.0	78.3	78.6
≥ 6000	40.1	69.3	72.6	74.4	76.1	76.2	77.0	77.4	77.4	78.0	78.3	78.3	78.5	78.5	78.8	79.1
≥ 5000	40.4	69.9	73.3	75.0	76.8	76.9	77.7	78.0	78.1	78.7	79.0	79.0	79.2	79.2	79.5	79.8
≥ 4500	40.6	70.3	73.6	75.4	77.1	77.3	78.0	78.4	78.5	79.1	79.3	79.3	79.5	79.6	79.9	80.2
≥ 4000	40.9	71.1	74.5	76.3	78.1	78.3	79.0	79.4	79.5	80.1	80.4	80.4	80.6	80.6	80.9	81.2
≥ 3500	41.3	71.8	75.2	77.1	78.9	79.1	79.8	80.2	80.3	80.9	81.2	81.2	81.4	81.4	81.7	82.0
≥ 3000	42.1	73.3	76.9	78.7	80.5	80.7	81.5	81.9	82.0	82.6	82.8	82.8	83.0	83.1	83.3	83.7
≥ 2500	43.0	75.0	78.7	80.6	82.3	82.7	83.4	83.9	83.9	84.6	84.8	84.8	85.0	85.0	85.3	85.7
≥ 2000	43.6	76.7	80.5	82.4	84.4	84.6	85.4	85.8	85.8	86.5	86.7	86.7	86.9	87.0	87.2	87.6
≥ 1800	43.8	77.3	81.1	83.1	85.1	85.3	86.1	86.5	86.5	87.2	87.4	87.4	87.6	87.7	87.9	88.3
≥ 1500	44.3	78.5	82.4	84.5	86.5	86.7	87.5	87.9	88.0	88.7	88.9	88.9	89.1	89.1	89.4	89.8
≥ 1200	44.6	79.9	84.0	86.2	88.3	88.6	89.4	89.8	89.9	90.6	90.8	90.8	91.0	91.0	91.3	91.7
≥ 1000	44.8	80.6	84.9	87.2	89.4	89.6	90.5	90.9	91.0	91.7	92.0	92.0	92.2	92.2	92.5	92.9
≥ 900	44.8	81.1	85.5	87.8	90.0	90.3	91.2	91.6	91.7	92.4	92.6	92.6	92.9	92.9	93.2	93.5
≥ 800	44.9	81.7	86.1	88.6	91.0	91.2	92.1	92.6	92.7	93.4	93.6	93.6	93.9	93.9	94.2	94.5
≥ 700	44.9	82.1	86.7	89.3	91.8	92.1	93.0	93.5	93.5	94.3	94.5	94.5	94.8	94.8	95.1	95.4
≥ 600	44.9	82.5	87.2	89.8	92.5	92.8	93.8	94.3	94.4	95.2	95.4	95.4	95.6	95.7	96.0	96.3
≥ 500	45.0	82.8	87.7	90.4	93.2	93.5	94.6	95.2	95.3	96.1	96.1	96.3	96.6	96.6	96.9	97.3
≥ 400	45.0	82.9	87.9	90.7	93.7	94.0	95.2	95.9	96.0	96.8	97.1	97.1	97.4	97.4	97.7	98.1
≥ 300	45.0	82.9	87.9	90.9	94.0	94.3	95.7	96.5	96.6	97.5	97.8	97.8	98.1	98.1	98.4	98.8
≥ 200	45.0	83.0	88.0	91.0	94.1	94.5	96.0	96.9	97.0	97.9	98.3	98.3	98.6	98.6	99.0	99.4
≥ 100	45.0	83.0	88.0	91.0	94.2	94.5	96.0	96.9	97.0	98.1	98.4	98.5	98.8	98.9	99.2	99.7
0	45.0	83.0	88.0	91.0	94.2	94.5	96.0	96.9	97.0	98.1	98.5	98.5	98.8	98.9	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 16287

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	36.1	55.3	57.7	59.1	60.2	60.4	60.9	61.3	61.4	61.8	62.0	62.1	62.4	62.5	62.7	63.0
≥ 20000	39.0	60.4	63.0	64.4	65.6	65.8	66.5	66.8	66.9	67.4	67.6	67.7	68.1	68.1	68.3	68.7
≥ 18000	39.1	60.6	63.1	64.6	65.8	66.0	66.6	67.0	67.1	67.5	67.8	67.8	68.2	68.3	68.5	68.9
≥ 16000	39.2	60.9	63.4	64.9	66.1	66.3	66.9	67.3	67.4	67.8	68.1	68.1	68.5	68.6	68.8	69.2
≥ 14000	39.8	62.0	64.7	66.3	67.5	67.7	68.3	68.7	68.8	69.3	69.5	69.5	69.9	70.0	70.2	70.6
≥ 12000	40.9	64.0	66.7	68.4	69.6	69.8	70.5	70.9	71.0	71.4	71.7	71.7	72.1	72.1	72.4	72.8
≥ 10000	42.1	66.4	69.2	70.9	72.2	72.4	73.1	73.5	73.6	74.0	74.3	74.3	74.7	74.7	75.0	75.4
≥ 9000	42.5	67.4	70.3	72.0	73.3	73.5	74.2	74.6	74.7	75.1	75.4	75.4	75.8	75.9	76.1	76.5
≥ 8000	43.3	69.0	72.0	73.8	75.2	75.4	76.1	76.5	76.6	77.1	77.3	77.4	77.8	77.8	78.0	78.4
≥ 7000	43.9	70.5	73.7	75.5	76.9	77.1	77.8	78.2	78.3	78.8	79.0	79.1	79.5	79.5	79.7	80.2
≥ 6000	44.4	71.6	74.8	76.6	78.0	78.3	79.0	79.4	79.5	80.0	80.2	80.3	80.7	80.7	80.9	81.4
≥ 5000	44.7	72.6	75.8	77.7	79.1	79.4	80.1	80.6	80.7	81.2	81.4	81.5	81.9	81.9	82.1	82.6
≥ 4500	45.1	73.1	76.5	78.4	79.8	80.1	80.8	81.3	81.4	81.8	82.1	82.1	82.5	82.6	82.8	83.2
≥ 4000	45.3	74.1	77.5	79.4	80.9	81.2	81.9	82.3	82.5	83.0	83.2	83.3	83.7	83.7	83.9	84.4
≥ 3500	46.1	75.1	78.5	80.6	82.1	82.4	83.1	83.6	83.7	84.2	84.5	84.5	84.9	84.9	85.2	85.6
≥ 3000	46.7	76.4	79.9	82.0	83.6	83.9	84.6	85.1	85.2	85.7	86.0	86.0	86.4	86.4	86.7	87.1
≥ 2500	47.3	77.7	81.3	83.5	85.0	85.3	86.1	86.6	86.7	87.2	87.5	87.6	88.0	88.0	88.2	88.7
≥ 2000	47.8	79.0	82.7	84.9	86.5	86.8	87.6	88.1	88.2	88.8	89.0	89.1	89.5	89.5	89.7	90.2
≥ 1800	48.0	79.4	83.2	85.4	87.0	87.3	88.2	88.6	88.8	89.3	89.6	89.6	90.0	90.1	90.3	90.7
≥ 1500	48.3	80.4	84.3	86.6	88.2	88.5	89.4	89.9	90.0	90.6	90.9	90.9	91.3	91.3	91.6	92.0
≥ 1200	48.6	81.3	85.3	87.6	89.3	89.6	90.5	91.0	91.1	91.7	92.0	92.0	92.4	92.4	92.7	93.1
≥ 1000	48.6	81.8	83.9	88.2	89.9	90.3	91.1	91.7	91.8	92.4	92.7	92.7	93.1	93.1	93.4	93.8
≥ 900	48.7	82.1	86.3	88.7	90.4	90.8	91.7	92.2	92.3	92.9	93.2	93.2	93.6	93.7	93.9	94.3
≥ 800	48.7	82.5	86.7	89.2	91.0	91.4	92.3	92.8	93.0	93.6	93.9	93.9	94.3	94.3	94.6	95.0
≥ 700	48.8	82.7	87.1	89.6	91.4	91.8	92.8	93.3	93.5	94.1	94.3	94.4	94.8	94.8	95.1	95.5
≥ 600	48.8	82.9	87.3	89.9	91.7	92.2	93.1	93.7	93.9	94.5	94.8	94.8	95.2	95.3	95.5	96.0
≥ 500	48.8	83.1	87.6	90.2	92.3	92.7	93.7	94.4	94.6	95.3	95.6	95.6	96.0	96.0	96.3	96.7
≥ 400	48.8	83.2	87.8	90.5	92.6	93.1	94.2	95.0	95.2	95.9	96.2	96.2	96.7	96.8	97.0	97.4
≥ 300	48.8	83.2	87.9	90.6	93.0	93.5	94.7	95.6	95.8	96.7	97.0	97.1	97.5	97.6	97.8	98.3
≥ 200	48.8	83.2	87.9	90.7	93.0	93.5	94.8	95.7	95.9	96.8	97.3	97.3	97.8	97.9	98.2	98.7
≥ 100	48.8	83.2	87.9	90.7	93.0	93.5	94.8	95.7	96.0	96.9	97.4	97.4	98.0	98.1	98.4	99.1
≥ 0	48.8	83.2	87.9	90.7	93.0	93.5	94.8	95.7	96.0	96.9	97.4	97.5	98.0	98.1	98.5	100.0

TOTAL NUMBER OF OBSERVATIONS 15835

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	35.7	50.8	52.3	53.2	54.0	54.0	54.3	54.7	54.8	55.1	55.3	55.3	55.6	55.6	55.8	36.
≥ 20000	37.0	56.7	58.5	59.5	60.4	60.4	60.9	61.2	61.2	61.6	61.8	61.8	62.1	62.1	62.3	62.6
≥ 18000	37.3	57.0	58.9	59.8	60.7	60.8	61.3	61.6	61.6	62.0	62.2	62.2	62.5	62.5	62.7	63.2
≥ 16000	37.4	57.3	59.1	60.1	61.0	61.1	61.6	61.8	61.9	62.2	62.5	62.5	62.7	62.7	63.0	63.4
≥ 14000	38.1	58.4	60.3	61.3	62.3	62.4	62.9	63.1	63.2	63.6	63.8	63.8	64.1	64.1	64.3	64.7
≥ 12000	39.2	60.3	62.2	63.3	64.3	64.4	64.9	65.2	65.2	65.6	65.9	65.9	66.1	66.1	66.4	66.8
≥ 10000	40.1	62.3	64.3	65.5	66.5	66.6	67.2	67.4	67.5	67.9	68.1	68.1	68.4	68.4	68.6	69.1
≥ 9000	40.5	63.2	65.3	66.5	67.6	67.6	68.2	68.5	68.5	68.9	69.1	69.2	69.4	69.4	69.7	70.1
≥ 8000	41.3	64.9	67.2	68.5	69.6	69.7	70.3	70.5	70.6	71.0	71.3	71.3	71.6	71.6	71.8	72.2
≥ 7000	42.1	66.4	68.8	70.2	71.4	71.4	72.0	72.3	72.4	72.8	73.0	73.1	73.3	73.3	73.6	74.0
≥ 6000	42.9	68.0	70.4	71.9	73.1	73.2	73.8	74.1	74.1	74.6	74.8	74.8	75.1	75.1	75.4	75.8
≥ 5000	43.5	69.6	72.2	73.8	75.1	75.2	75.8	76.1	76.2	76.6	76.9	76.9	77.2	77.2	77.4	77.9
≥ 4500	44.0	70.4	73.1	74.7	76.1	76.2	76.8	77.1	77.2	77.6	77.9	77.9	78.2	78.2	78.4	78.9
≥ 4000	44.6	71.6	74.4	76.1	77.5	77.6	78.3	78.6	78.6	79.1	79.3	79.4	79.6	79.6	79.9	80.3
≥ 3500	45.3	72.9	75.7	77.4	78.9	79.0	79.7	80.0	80.1	80.5	80.7	80.8	81.1	81.1	81.3	81.8
≥ 3000	46.0	74.5	77.4	79.1	80.6	80.7	81.5	81.8	81.9	82.3	82.6	82.6	82.9	82.9	83.1	83.6
≥ 2500	46.6	75.8	78.8	80.6	82.1	82.3	83.0	83.4	83.4	83.9	84.1	84.2	84.5	84.5	84.7	85.2
≥ 2000	47.1	77.1	80.2	82.0	83.6	83.7	84.5	84.9	84.9	85.4	85.6	85.7	86.0	86.0	86.2	86.7
≥ 1800	47.2	77.5	80.7	82.5	84.1	84.2	85.0	85.3	85.4	85.9	86.2	86.2	86.5	86.5	86.7	87.2
≥ 1500	47.4	78.4	81.6	83.5	85.2	85.3	86.2	86.5	86.6	87.1	87.4	87.4	87.7	87.7	88.0	88.4
≥ 1200	47.7	79.5	82.8	84.9	86.6	86.7	87.6	88.0	88.1	88.6	88.9	88.9	89.2	89.2	89.5	89.9
≥ 1000	47.9	80.2	83.8	85.9	87.6	87.8	88.7	89.2	89.2	89.8	90.1	90.1	90.4	90.4	90.7	91.1
≥ 900	48.0	80.7	84.3	86.4	88.2	88.4	89.3	89.8	89.8	90.4	90.7	90.7	91.0	91.1	91.3	91.7
≥ 800	48.0	81.2	84.9	87.1	88.9	89.1	90.1	90.6	90.6	91.2	91.5	91.5	91.9	91.9	92.1	92.6
≥ 700	48.1	81.5	85.2	87.6	89.5	89.7	90.7	91.2	91.2	91.8	92.1	92.2	92.5	92.5	92.8	93.2
≥ 600	48.1	81.7	85.6	88.0	89.9	90.2	91.3	91.8	91.9	92.6	92.9	92.9	93.2	93.2	93.5	94.0
≥ 500	48.1	82.0	86.0	88.5	90.7	91.0	92.2	92.9	93.0	93.7	94.0	94.0	94.4	94.4	94.6	95.1
≥ 400	48.2	82.1	86.2	88.8	91.1	91.5	93.0	93.8	93.9	94.7	95.0	95.1	95.4	95.4	95.7	96.2
≥ 300	48.2	82.2	86.4	89.1	91.6	92.1	93.7	94.7	94.8	95.8	96.2	96.3	96.7	96.7	97.0	97.4
≥ 200	48.2	82.3	86.5	89.2	91.8	92.3	94.0	95.1	95.3	96.4	96.9	96.9	97.5	97.5	97.8	98.3
≥ 100	48.2	82.3	86.5	89.2	91.8	92.3	94.1	95.1	95.3	96.5	97.1	97.1	97.8	97.9	98.4	99.1
0	48.2	82.3	86.5	89.2	91.8	92.3	94.1	95.1	95.3	96.5	97.1	97.1	97.8	98.0	98.6	100.0

TOTAL NUMBER OF OBSERVATIONS 16348

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	33.8	52.4	54.4	55.5	56.6	56.6	57.1	57.4	57.5	57.8	57.9	57.9	58.1	58.1	58.4	59.1
≥ 20000	35.9	56.0	58.0	59.2	60.3	60.3	60.8	61.1	61.2	61.5	61.7	61.7	61.9	61.9	62.2	62.9
≥ 18000	36.0	56.1	[illegible].2	59.3	60.4	60.4	61.0	61.3	61.4	61.7	61.9	61.9	62.0	62.0	62.4	63.1
≥ 16000	36.1	56.3	[illegible].4	59.6	60.7	60.7	61.3	61.6	61.7	62.0	62.1	62.1	62.3	62.3	62.6	63.4
≥ 14000	36.5	57.3	59.5	60.6	61.8	61.9	62.4	62.7	62.8	63.1	63.3	63.3	63.4	63.4	63.8	64.5
≥ 12000	36.9	58.4	60.6	61.8	62.9	63.0	63.5	63.8	63.9	64.2	64.4	64.4	64.6	64.6	64.9	65.6
≥ 10000	38.1	60.5	62.8	64.0	65.2	65.2	65.8	66.1	66.2	66.5	66.6	66.6	66.8	66.8	67.2	67.9
≥ 9000	38.4	61.2	63.6	64.7	66.0	66.0	66.6	66.9	66.9	67.3	67.4	67.4	67.6	67.6	68.0	68.7
≥ 8000	39.6	63.4	65.9	67.0	68.3	68.3	68.9	69.2	69.3	69.7	69.8	69.8	70.0	70.0	70.4	71.2
≥ 7000	40.0	64.9	67.5	68.7	69.9	70.0	70.6	70.9	71.0	71.4	71.5	71.5	71.7	[illegible].7	72.1	72.8
≥ 6000	40.4	66.2	69.0	70.2	71.5	71.6	72.1	72.4	72.5	72.9	73.1	73.1	73.3	73.3	73.6	[illegible].4
≥ 5000	41.4	68.6	71.3	72.7	74.0	74.1	74.6	74.9	75.0	75.4	75.5	75.5	75.7	75.7	76.1	76.9
≥ 4500	41.7	69.5	72.3	73.7	75.0	75.1	75.6	75.9	76.0	76.4	76.6	76.6	76.8	76.8	77.1	77.9
≥ 4000	42.0	70.1	73.1	74.7	76.1	76.2	76.7	77.0	77.1	77.5	77.7	77.7	77.8	77.8	78.2	79.0
≥ 3500	42.4	71.4	74.6	76.3	77.7	77.7	78.4	78.6	78.7	79.1	79.3	79.3	79.5	79.5	79.9	80.6
≥ 3000	42.7	72.3	75.5	77.2	78.7	78.8	79.5	79.8	79.9	80.3	80.5	80.5	80.7	80.7	81.1	81.8
≥ 2500	43.0	73.0	76.4	78.2	79.8	79.9	80.6	80.9	81.0	81.4	81.6	81.6	81.8	81.8	82.2	82.9
≥ 2000	43.3	73.9	77.3	79.2	80.9	81.0	81.8	82.1	82.2	82.6	82.7	82.7	83.0	83.0	83.4	84.1
≥ 1800	43.4	74.2	77.7	79.6	81.3	81.4	82.3	82.6	82.7	83.1	83.3	83.3	83.5	83.5	83.9	84.6
≥ 1500	43.9	75.3	78.8	80.7	82.5	82.6	83.4	83.7	83.8	84.2	84.4	84.4	84.6	84.6	85.0	85.7
≥ 1200	44.1	76.4	80.2	82.2	84.0	84.1	84.9	85.3	85.4	85.8	85.9	85.9	86.2	86.2	86.5	87.3
≥ 1000	44.2	77.3	81.2	83.2	84.9	85.0	85.9	86.3	86.3	86.8	86.9	86.9	87.1	87.1	87.5	88.3
≥ 900	44.3	77.6	81.5	83.5	85.2	85.3	86.2	86.5	86.6	87.1	87.2	87.2	87.4	87.4	87.8	88.5
≥ 800	44.3	77.9	81.9	84.0	85.8	85.9	86.7	87.1	87.2	87.6	87.8	87.8	88.0	88.0	88.4	89.1
≥ 700	44.4	78.5	82.6	84.8	86.7	86.8	87.7	88.0	88.1	88.5	88.7	88.7	88.9	88.9	89.3	90.0
≥ 600	44.4	79.0	83.1	85.4	87.4	87.5	88.5	88.9	89.0	89.4	89.5	89.5	89.8	89.8	90.1	90.9
≥ 500	44.5	79.3	83.8	86.3	88.3	88.4	89.4	89.8	89.9	90.3	90.5	90.5	90.7	90.7	91.1	91.8
≥ 400	44.6	79.6	84.2	86.7	89.0	89.2	90.4	91.0	91.1	91.6	91.7	91.7	92.0	92.0	92.3	93.1
≥ 300	44.6	79.7	84.3	87.0	89.5	90.0	91.4	92.3	92.5	93.1	93.6	93.6	93.9	93.9	94.3	95.0
≥ 200	44.6	79.7	84.4	87.1	89.6	90.1	91.7	93.0	93.3	94.0	94.7	94.7	95.1	95.2	95.6	96.3
≥ 100	44.6	79.7	84.4	87.1	89.6	90.1	91.7	93.1	93.3	94.2	95.4	95.4	96.4	96.4	97.1	98.0
≥ 0	44.6	79.7	84.4	87.1	89.6	90.1	91.7	93.1	93.3	94.2	95.4	95.4	96.5	96.6	97.4	100.0

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-79 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING	29.9	46.1	50.7	51.9	53.0	53.0	53.5	53.6	53.6	54.3	54.4	54.5	55.0	55.0	55.4	55.8
≥ 20000	31.8	51.6	54.4	53.7	56.8	56.9	57.4	57.6	57.7	58.4	58.7	58.8	59.3	59.3	59.7	60.1
≥ 18000	31.8	51.6	54.4	55.7	56.8	56.9	57.4	57.6	57.7	58.4	58.7	58.8	59.3	59.3	59.7	60.1
≥ 16000	32.0	52.1	55.0	56.2	57.4	57.5	58.0	58.3	58.3	59.0	59.3	59.4	59.9	59.9	60.3	60.7
≥ 14000	32.4	52.9	55.8	57.1	58.3	58.4	59.0	59.2	59.3	60.0	60.3	60.4	60.9	60.9	61.2	61.7
≥ 12000	32.7	53.7	56.7	57.9	59.1	59.2	59.8	60.0	60.1	60.9	61.2	61.2	61.7	61.7	62.1	62.5
≥ 10000	33.7	56.0	59.0	60.4	61.7	61.8	62.4	62.6	62.7	63.4	63.7	63.8	64.3	64.3	64.7	65.1
≥ 9000	34.0	56.6	59.7	61.0	62.3	62.4	63.0	63.3	63.3	64.1	64.4	64.4	64.9	64.9	65.4	65.8
≥ 8000	34.7	58.3	61.4	62.9	64.3	64.4	64.9	65.2	65.3	66.1	66.4	66.4	66.9	66.9	67.5	67.9
≥ 7000	35.3	59.9	63.2	64.7	66.2	66.3	66.9	67.3	67.4	68.2	68.5	68.5	69.1	69.1	69.6	70.0
≥ 6000	35.6	60.7	63.9	65.5	66.9	67.1	67.7	68.1	68.2	69.0	69.3	69.3	69.8	69.8	70.4	70.8
≥ 5000	36.7	63.1	66.4	68.2	69.6	69.8	70.4	70.7	70.8	71.7	72.0	72.0	72.6	72.6	73.1	73.5
≥ 4500	37.0	64.0	67.6	69.4	70.9	71.1	71.7	72.0	72.1	73.0	73.3	73.4	73.9	73.9	74.4	74.8
≥ 4000	37.5	65.5	69.1	71.0	72.6	72.7	73.4	73.7	73.8	74.7	75.0	75.0	75.5	75.5	76.1	76.5
≥ 3500	38.2	66.8	70.4	72.3	74.0	74.1	74.8	75.2	75.3	76.2	76.5	76.5	77.0	77.0	77.6	78.0
≥ 3000	38.5	67.7	71.4	73.3	75.1	75.2	76.0	76.3	76.4	77.4	77.7	77.7	78.3	78.3	78.8	79.2
≥ 2500	38.6	68.9	72.7	74.7	76.5	76.7	77.4	77.9	78.0	79.0	79.3	79.4	79.9	79.9	80.4	80.9
≥ 2000	38.9	69.7	73.5	75.5	77.4	77.5	78.3	78.8	78.9	79.9	80.2	80.3	80.8	80.8	81.3	81.8
≥ 1800	39.2	70.1	73.9	76.0	77.8	77.9	78.9	79.4	79.5	80.5	80.8	80.9	81.4	81.4	81.9	82.4
≥ 1500	39.3	70.9	74.8	76.8	78.7	78.9	79.8	80.3	80.4	81.4	81.8	81.8	82.3	82.3	82.8	83.3
≥ 1200	39.6	71.9	75.8	77.8	79.7	79.9	80.9	81.5	81.6	82.6	83.0	83.1	83.6	83.6	84.1	84.6
≥ 1000	40.0	73.1	77.1	79.3	81.2	81.4	82.4	83.0	83.1	84.1	84.5	84.6	85.1	85.1	85.6	86.1
≥ 900	40.1	73.4	77.4	79.5	81.5	81.7	82.7	83.3	83.4	84.4	84.8	84.9	85.4	85.4	85.9	86.3
≥ 800	40.2	74.0	78.1	80.2	82.3	82.5	83.5	84.1	84.2	85.2	85.6	85.6	86.2	86.2	86.7	87.1
≥ 700	40.3	74.6	78.9	81.1	83.1	83.3	84.3	84.9	85.0	86.0	86.4	86.5	87.0	87.0	87.5	88.0
≥ 600	40.5	75.0	79.4	81.7	83.9	84.1	85.2	85.8	85.9	86.9	87.3	87.3	87.8	87.8	88.4	88.8
≥ 500	40.5	75.5	80.1	82.6	85.0	85.3	86.5	87.2	87.3	88.3	88.7	88.7	89.2	89.2	89.8	90.2
≥ 400	40.5	75.6	80.5	83.3	86.3	86.7	88.0	88.8	88.9	89.9	90.5	90.5	91.0	91.0	91.5	92.0
≥ 300	40.5	75.8	80.8	84.0	87.2	87.6	89.2	90.4	90.6	91.8	92.3	92.4	93.0	93.0	93.5	94.0
≥ 200	40.5	75.8	80.9	84.2	87.4	87.9	89.8	91.3	91.6	93.1	93.8	93.9	94.6	94.6	95.2	95.7
≥ 100	40.5	75.8	80.9	84.2	87.4	87.9	89.9	91.4	91.7	93.4	94.2	94.3	95.4	95.4	96.4	97.1
≥ 0	40.5	75.8	80.9	84.2	87.4	87.9	89.9	91.5	91.8	93.5	94.3	94.4	95.7	95.7	97.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	22.5	39.4	42.0	43.6	45.7	45.8	46.6	47.0	47.1	48.1	48.7	48.8	49.4	49.4	49.8	50.3
≥ 20000	24.6	44.1	46.7	48.4	50.6	50.7	51.6	52.2	52.2	53.5	54.1	54.2	54.9	54.9	55.3	55.8
≥ 18000	24.6	44.2	46.7	48.4	50.7	50.8	51.7	52.2	52.3	53.6	54.2	54.3	55.0	55.0	55.4	55.9
≥ 16000	24.7	44.4	47.1	48.7	51.0	51.1	52.1	52.6	52.7	53.9	54.5	54.6	55.3	55.3	55.8	56.3
≥ 14000	25.1	45.3	48.0	49.7	52.1	52.2	53.1	53.7	53.8	55.1	55.7	55.8	56.5	56.5	56.9	57.4
≥ 12000	25.6	46.3	49.1	50.9	53.3	53.5	54.4	55.0	55.1	56.4	57.0	57.1	57.8	57.8	58.2	58.7
≥ 10000	26.6	48.6	51.5	53.6	56.1	56.3	57.2	57.9	58.0	59.3	60.0	60.0	60.8	60.8	61.2	61.7
≥ 9000	27.1	49.6	52.6	54.6	57.2	57.3	58.3	58.9	59.0	60.3	61.0	61.0	61.8	61.8	62.2	62.8
≥ 8000	27.9	51.3	54.5	56.7	59.3	59.4	60.5	61.3	61.4	62.7	63.3	63.4	64.1	64.1	64.5	65.2
≥ 7000	28.3	52.7	56.1	58.3	61.0	61.2	62.4	63.2	63.3	64.6	65.3	65.3	66.1	66.1	66.6	67.3
≥ 6000	28.5	54.0	57.4	59.7	62.5	62.6	63.8	64.7	64.8	66.1	66.8	66.8	67.6	67.6	68.1	68.8
≥ 5000	28.8	55.1	58.7	60.9	64.1	64.2	65.4	66.3	66.4	67.8	68.4	68.5	69.3	69.3	69.8	70.5
≥ 4500	29.0	56.0	59.6	62.0	65.2	65.3	66.6	67.4	67.6	68.9	69.6	69.7	70.5	70.5	71.0	71.7
≥ 4000	29.8	57.7	61.2	63.7	67.0	67.2	68.5	69.4	69.5	70.9	71.6	71.7	72.5	72.5	73.1	73.8
≥ 3500	30.2	58.2	61.8	64.4	67.8	67.9	69.3	70.1	70.3	71.7	72.4	72.4	73.3	73.3	73.9	74.6
≥ 3000	30.5	59.3	63.0	65.5	69.0	69.1	70.5	71.4	71.5	72.9	73.6	73.7	74.6	74.6	75.2	75.9
≥ 2500	31.1	60.9	64.6	67.3	70.7	70.9	72.3	73.2	73.3	74.9	75.6	75.7	76.7	76.7	77.3	78.0
≥ 2000	31.6	61.9	65.7	68.3	72.0	72.2	73.7	74.7	74.9	76.4	77.2	77.3	78.3	78.3	78.9	79.6
≥ 1800	31.7	62.1	65.9	68.6	72.3	72.4	73.9	75.0	75.1	76.7	77.5	77.5	78.5	78.6	79.1	79.9
≥ 1500	32.1	63.2	67.0	69.9	73.7	73.8	75.4	76.4	76.6	78.2	79.0	79.0	80.0	80.1	80.6	81.4
≥ 1200	32.4	64.1	68.0	70.9	74.9	75.1	76.8	77.9	78.0	79.7	80.5	80.5	81.5	81.6	82.1	82.9
≥ 1000	32.7	65.3	69.3	72.2	76.3	76.5	78.2	79.4	79.5	81.2	82.0	82.0	83.0	83.1	83.6	84.4
≥ 900	32.8	65.6	69.6	72.6	76.7	76.9	78.6	79.8	79.9	81.6	82.4	82.5	83.4	83.5	84.1	84.8
≥ 800	32.9	66.1	70.2	73.2	77.5	77.7	79.4	80.6	80.8	82.5	83.3	83.3	84.3	84.3	84.9	85.6
≥ 700	33.0	66.7	70.9	74.0	78.3	78.5	80.3	81.4	81.6	83.3	84.1	84.1	85.1	85.2	85.7	86.5
≥ 600	33.1	67.2	71.6	75.0	79.4	79.6	81.4	82.8	83.0	84.8	85.5	85.6	86.6	86.7	87.2	88.0
≥ 500	33.1	67.7	72.3	75.7	80.3	80.5	82.5	84.0	84.1	86.0	86.8	86.8	87.8	87.9	88.4	89.2
≥ 400	33.1	68.1	72.8	76.5	81.5	81.8	83.8	85.5	85.7	87.6	88.4	88.4	89.5	89.5	90.1	90.8
≥ 300	33.1	68.1	73.0	76.9	82.2	82.5	84.9	86.8	87.0	89.6	90.6	90.6	92.0	92.0	92.7	93.4
≥ 200	33.1	68.2	73.2	77.1	82.5	82.9	85.6	87.9	88.2	91.2	92.6	92.7	94.2	94.4	95.2	95.9
≥ 100	33.1	68.2	73.2	77.1	82.5	82.9	85.6	88.0	88.3	91.3	92.9	93.0	94.8	94.9	95.9	97.1
≥ 0	33.1	68.2	73.2	77.1	82.5	82.9	85.6	88.0	88.3	91.3	92.9	93.0	94.9	95.1	96.3	100.0

TOTAL NUMBER OF OBSERVATIONS 2138

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	26.7	41.4	44.1	45.3	46.8	47.2	47.6	47.9	48.0	48.2	48.5	48.5	48.5	48.6	48.7	48.8
≥ 20000	29.8	46.4	49.3	50.6	52.4	52.9	53.5	53.9	53.9	54.1	54.6	54.6	54.7	54.7	54.8	54.9
≥ 18000	29.9	46.6	49.5	50.8	52.6	53.1	53.8	54.1	54.1	54.4	54.8	54.8	54.9	54.9	55.0	55.1
≥ 16000	30.1	46.9	49.9	51.2	53.0	53.5	54.2	54.6	54.6	54.8	55.3	55.3	55.4	55.4	55.5	55.6
≥ 14000	30.7	48.0	51.0	52.4	54.2	54.7	55.4	55.7	55.8	56.1	56.5	56.5	56.6	56.6	56.7	56.8
≥ 12000	31.9	50.0	53.2	54.7	56.6	57.1	57.8	58.2	58.2	58.5	58.9	59.0	59.0	59.0	59.1	57.3
≥ 10000	33.2	53.0	56.5	58.1	60.0	60.5	61.3	61.6	61.7	62.0	62.4	62.5	62.5	62.6	62.6	62.8
≥ 9000	33.8	54.1	57.8	59.4	61.3	61.9	62.6	63.0	63.0	63.3	63.8	63.8	63.9	63.9	64.0	64.1
≥ 8000	34.4	55.8	59.6	61.2	63.2	63.9	64.6	64.9	65.0	65.3	65.7	65.8	65.9	65.9	66.0	66.2
≥ 7000	24.9	57.5	61.4	63.1	65.2	65.8	66.6	66.9	67.0	67.4	67.8	67.8	67.9	68.0	68.1	68.2
≥ 6000	35.0	58.7	62.8	64.3	66.5	67.1	68.0	68.3	68.4	68.8	69.2	69.3	69.4	69.4	69.5	69.7
≥ 5000	35.3	59.9	63.9	65.7	68.0	68.7	69.6	69.9	70.0	70.5	71.0	71.1	71.2	71.2	71.3	71.4
≥ 4500	35.6	60.8	64.8	66.8	69.1	69.8	70.7	71.0	71.1	71.6	72.1	72.1	72.2	72.3	72.4	72.5
≥ 4000	36.0	61.9	66.0	68.1	70.6	71.4	72.4	72.7	72.9	73.4	73.9	73.9	74.0	74.1	74.1	74.3
≥ 3500	36.1	62.5	66.5	68.7	71.2	71.9	73.1	73.4	73.5	74.0	74.5	74.6	74.7	74.7	74.8	74.9
≥ 3000	36.7	63.8	68.1	70.4	72.8	73.6	74.8	75.2	75.3	75.8	76.3	76.3	76.4	76.5	76.6	76.7
≥ 2500	37.4	65.5	69.8	72.0	74.6	75.5	76.8	77.2	77.3	77.9	78.4	78.5	78.6	78.6	78.7	78.9
≥ 2000	37.9	66.7	71.0	73.3	76.0	76.9	78.2	78.6	78.7	79.3	79.9	79.9	80.0	80.0	80.1	80.3
≥ 1800	38.1	66.9	71.3	73.7	76.3	77.3	78.6	79.0	79.1	79.8	80.4	80.4	80.5	80.6	80.6	80.8
≥ 1500	38.5	68.0	72.5	74.9	77.6	78.6	79.9	80.3	80.5	81.1	81.7	81.7	81.8	81.9	82.0	82.1
≥ 1200	38.9	69.1	73.8	76.5	79.4	80.4	81.8	82.2	82.4	83.1	83.7	83.7	83.8	83.9	84.0	84.1
≥ 1000	39.1	69.9	74.9	77.9	80.9	82.0	83.3	83.8	84.0	84.5	85.3	85.4	85.5	85.5	85.6	85.7
≥ 900	39.2	70.4	75.5	78.7	81.7	82.8	84.2	84.7	84.9	85.6	86.2	86.3	86.3	86.4	86.5	86.6
≥ 800	39.2	70.8	76.1	79.3	82.5	83.6	84.9	85.5	85.7	86.5	87.1	87.1	87.2	87.2	87.3	87.5
≥ 700	39.2	71.2	76.5	79.9	83.2	84.3	85.7	86.4	86.6	87.4	88.0	88.0	88.1	88.2	88.3	88.4
≥ 600	39.2	71.6	77.1	80.6	84.2	85.6	87.1	87.9	88.2	89.0	89.6	89.6	89.7	89.8	89.9	90.0
≥ 500	39.2	72.1	78.0	81.8	85.6	87.1	89.3	90.1	90.4	91.4	92.0	92.0	92.1	92.1	92.2	92.4
≥ 400	39.2	72.5	78.4	82.3	86.3	88.1	90.6	91.8	92.2	93.4	94.1	94.2	94.2	94.3	94.4	94.5
≥ 300	39.2	72.5	78.4	82.4	86.7	88.8	91.6	93.1	93.5	95.5	96.3	96.4	96.6	96.6	96.7	96.9
≥ 200	39.2	72.6	78.5	82.6	87.0	89.1	92.0	93.7	94.2	96.2	97.1	97.3	97.8	97.8	97.9	98.1
≥ 100	39.2	72.6	78.5	82.6	87.0	89.1	92.0	93.7	94.2	96.2	97.3	97.6	98.3	98.4	99.0	99.4
≥ 0	39.2	72.6	78.5	82.6	87.0	89.1	92.0	93.7	94.2	96.2	97.3	97.6	98.3	98.5	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	35.3	46.9	47.5	47.6	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7
≥ 20000	40.3	54.7	55.3	55.4	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6
≥ 18000	40.8	55.3	55.6	55.7	55.9	55.9	55.9	55.9	55.9	56.0	56.0	56.0	56.0	56.0	56.0	56.0
≥ 16000	41.1	55.6	56.2	56.4	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6
≥ 14000	42.2	57.1	57.7	57.9	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1
≥ 12000	43.9	59.5	60.2	60.3	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5
≥ 10000	45.0	61.5	62.2	62.4	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6
≥ 9000	45.5	62.4	63.1	63.3	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5
≥ 8000	46.2	64.4	65.2	65.4	65.6	65.6	65.6	65.6	65.6	65.7	65.7	65.7	65.7	65.7	65.7	65.7
≥ 7000	47.2	66.4	67.2	67.4	67.7	67.7	67.7	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8
≥ 6000	47.6	67.4	68.3	68.5	68.8	68.8	68.9	68.9	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0
≥ 5000	48.8	69.6	70.6	70.8	71.2	71.2	71.2	71.2	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 4500	49.3	70.5	71.5	71.8	72.1	72.1	72.1	72.2	72.2	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 4000	50.3	72.4	73.5	73.8	74.2	74.2	74.3	74.4	74.4	74.5	74.5	74.5	74.5	74.5	74.5	74.5
≥ 3500	50.8	73.4	74.5	74.8	75.3	75.3	75.4	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 3000	51.9	75.6	76.8	77.2	77.8	77.9	78.0	78.1	78.1	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 2500	53.1	78.1	79.3	79.9	80.6	80.6	80.8	81.0	81.0	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 2000	54.1	80.4	81.7	82.3	83.1	83.2	83.4	83.5	83.6	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 1800	54.4	81.2	82.5	83.2	84.0	84.0	84.2	84.5	84.6	84.7	84.7	84.7	84.7	84.7	84.7	84.7
≥ 1500	55.1	82.9	84.3	85.1	85.9	86.0	86.3	86.6	86.6	86.7	86.7	86.7	86.7	86.7	86.7	86.7
≥ 1200	55.5	84.5	86.1	87.0	88.0	88.2	88.5	88.8	88.9	89.0	89.0	89.0	89.0	89.0	89.0	89.0
≥ 1000	55.8	85.6	87.4	88.5	89.6	89.8	90.0	90.4	90.5	90.6	90.6	90.6	90.6	90.6	90.6	90.6
≥ 900	55.9	85.8	87.7	88.9	89.9	90.2	90.5	90.9	91.0	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 800	56.1	86.2	88.1	89.3	90.6	90.8	91.1	91.6	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7
≥ 700	56.1	86.6	88.5	89.8	91.1	91.5	91.8	92.4	92.4	92.5	92.5	92.5	92.5	92.5	92.5	92.5
≥ 600	56.2	87.0	89.1	90.6	92.0	92.4	92.8	93.5	93.5	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 500	56.2	87.5	89.9	91.7	93.3	93.7	94.2	95.2	95.2	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 400	56.2	87.6	90.0	92.0	93.9	94.4	95.2	96.4	96.5	97.1	97.2	97.2	97.2	97.2	97.2	97.2
≥ 300	56.2	87.6	90.2	92.3	94.4	95.0	95.9	97.1	97.4	98.2	98.5	98.5	98.6	98.6	98.6	98.6
≥ 200	56.2	87.6	90.2	92.3	94.4	95.1	96.1	97.4	97.8	98.7	99.4	99.4	99.5	99.6	99.6	99.6
≥ 100	56.2	87.6	90.2	92.3	94.4	95.1	96.1	97.4	97.8	98.8	99.6	99.6	99.7	99.8	99.9	100.0
≥ 0	56.2	87.6	90.2	92.3	94.4	95.1	96.1	97.4	97.8	98.8	99.6	99.6	99.8	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	40.5	49.6	50.3	50.4	50.4	50.4	50.4	50.4	50.4	50.4	50.4	50.4	50.4	50.4	50.4	50.4
≥ 20000	47.8	59.6	60.4	60.6	60.6	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 18000	48.0	59.9	60.7	60.9	60.9	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0
≥ 16000	48.2	60.2	61.0	61.2	61.2	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 14000	48.9	61.4	62.2	62.4	62.4	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5
≥ 12000	50.5	63.8	64.6	64.9	64.9	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 10000	51.9	66.3	67.2	67.5	67.5	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6
≥ 9000	52.1	67.0	67.9	68.2	68.2	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 8000	52.9	68.7	69.7	69.9	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
≥ 7000	54.0	70.5	71.6	71.9	72.0	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 6000	54.7	71.8	72.9	73.2	73.3	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4
≥ 5000	55.8	73.4	74.6	74.8	75.1	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 4500	56.1	74.1	75.2	75.5	75.7	75.8	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9
≥ 4000	57.1	75.5	76.9	77.2	77.5	77.6	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7
≥ 3500	57.6	76.8	78.2	78.6	78.9	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1
≥ 3000	58.7	78.7	80.2	80.7	81.0	81.2	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 2500	59.6	81.0	82.7	83.3	83.7	84.0	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1
≥ 2000	60.4	83.0	84.8	85.4	85.8	86.1	86.2	86.3	86.3	86.3	86.3	86.3	86.3	86.3	86.3	86.3
≥ 1800	60.6	83.5	85.3	85.9	86.3	86.6	86.7	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 1500	61.2	84.9	86.7	87.5	88.0	88.3	88.4	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 1200	61.4	86.1	88.1	89.1	89.7	90.0	90.1	90.2	90.3	90.4	90.4	90.4	90.4	90.4	90.4	90.4
≥ 1000	61.5	86.8	88.9	90.0	90.6	91.0	91.2	91.3	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 900	61.6	87.0	89.2	90.5	91.2	91.5	91.8	91.9	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 800	61.7	87.3	89.6	91.0	91.8	92.2	92.5	92.6	92.6	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 700	61.7	87.4	89.9	91.4	92.3	92.7	93.1	93.4	93.5	93.8	93.9	93.9	93.9	93.9	93.9	93.9
≥ 600	61.8	87.7	90.3	91.8	92.9	93.3	93.7	94.1	94.2	94.6	94.8	94.8	94.8	94.8	94.8	94.8
≥ 500	61.8	87.8	90.5	92.2	93.5	94.1	94.6	95.0	95.1	95.7	95.8	95.8	95.8	95.8	95.8	95.8
≥ 400	61.9	88.0	90.7	92.5	94.1	94.7	95.4	96.0	96.2	96.8	97.0	97.0	97.0	97.0	97.0	97.0
≥ 300	61.9	88.0	90.7	92.5	94.3	95.1	96.0	96.6	96.9	98.1	98.4	98.4	98.5	98.5	98.5	98.5
≥ 200	61.9	88.0	90.7	92.5	94.5	95.3	96.3	97.0	97.3	98.7	99.3	99.3	99.5	99.5	99.5	99.5
≥ 100	61.9	88.0	90.7	92.5	94.5	95.3	96.3	97.0	97.3	98.7	99.4	99.5	99.8	99.8	99.8	99.8
≥ 0	61.9	88.0	90.7	92.5	94.5	95.3	96.3	97.0	97.3	98.7	99.4	99.5	99.8	99.8	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	40.7	55.5	56.1	56.3	56.6	56.6	56.6	56.7	56.7	56.8	56.8	56.8	56.8	56.8	56.8	56.9
≥ 20000	44.6	61.8	62.6	62.9	63.2	63.2	63.2	63.3	63.3	63.3	63.4	63.4	63.5	63.5	63.5	63.5
≥ 18000	44.8	62.1	62.8	63.2	63.4	63.5	63.5	63.5	63.5	63.6	63.7	63.7	63.8	63.8	63.8	63.8
≥ 16000	44.9	62.3	63.1	63.4	63.7	63.7	63.7	63.8	63.8	63.9	63.9	63.9	64.0	64.0	64.0	64.0
≥ 14000	45.7	63.5	64.3	64.7	64.9	64.9	64.9	65.0	65.0	65.1	65.1	65.1	65.2	65.2	65.2	65.3
≥ 12000	46.7	65.7	66.5	66.9	67.2	67.3	67.3	67.3	67.3	67.4	67.5	67.5	67.6	67.6	67.6	67.6
≥ 10000	48.6	68.7	69.5	69.9	70.4	70.4	70.4	70.5	70.5	70.5	70.6	70.6	70.7	70.7	70.7	70.7
≥ 9000	48.9	69.6	70.4	70.8	71.2	71.3	71.3	71.3	71.3	71.4	71.5	71.5	71.6	71.6	71.6	71.6
≥ 8000	49.5	70.9	71.7	72.1	72.6	72.6	72.6	72.7	72.7	72.7	72.8	72.8	72.9	72.9	72.9	72.9
≥ 7000	50.4	73.0	73.8	74.3	74.8	74.8	74.8	74.8	74.8	74.9	75.0	75.0	75.1	75.1	75.1	75.1
≥ 6000	51.1	74.1	75.0	75.5	75.9	76.0	76.0	76.0	76.0	76.1	76.2	76.2	76.3	76.3	76.3	76.3
≥ 5000	51.6	75.4	76.3	76.9	77.5	77.6	77.7	77.7	77.7	77.8	77.8	77.8	77.9	77.9	77.9	78.0
≥ 4500	51.8	76.0	76.9	77.5	78.0	78.1	78.2	78.3	78.3	78.4	78.4	78.4	78.5	78.5	78.5	78.5
≥ 4000	52.4	77.3	78.4	79.2	79.8	79.9	79.9	80.0	80.0	80.1	80.1	80.1	80.2	80.2	80.2	80.3
≥ 3500	52.7	78.2	79.5	80.3	80.9	81.0	81.1	81.2	81.2	81.3	81.3	81.3	81.4	81.4	81.4	81.4
≥ 3000	53.3	79.4	80.8	81.6	82.2	82.3	82.4	82.5	82.5	82.6	82.6	82.6	82.7	82.7	82.7	82.7
≥ 2500	54.0	81.4	82.8	83.7	84.4	84.5	84.7	84.7	84.7	84.8	84.9	84.9	84.9	84.9	84.9	85.0
≥ 2000	54.4	83.1	84.7	85.6	86.4	86.5	86.7	86.7	86.7	86.8	86.9	86.9	87.0	87.0	87.0	87.0
≥ 1800	54.5	83.2	84.9	85.8	86.6	86.8	87.0	87.0	87.0	87.1	87.1	87.1	87.2	87.2	87.2	87.3
≥ 1500	54.7	84.0	86.0	87.0	87.8	88.0	88.2	88.2	88.2	88.4	88.4	88.4	88.5	88.5	88.5	88.5
≥ 1200	54.7	84.7	86.9	88.0	88.8	89.0	89.2	89.3	89.3	89.5	89.5	89.5	89.6	89.6	89.6	89.7
≥ 1000	54.7	84.9	87.2	88.4	89.3	89.5	89.9	90.1	90.2	90.3	90.4	90.4	90.5	90.5	90.5	90.5
≥ 900	54.7	85.0	87.4	88.6	89.7	89.9	90.4	90.6	90.6	90.7	90.8	90.8	90.9	90.9	90.9	90.9
≥ 800	54.7	85.3	87.7	89.0	90.4	90.6	91.1	91.3	91.3	91.4	91.5	91.5	91.6	91.6	91.6	91.6
≥ 700	54.7	85.5	88.1	89.5	91.0	91.2	91.9	92.1	92.1	92.3	92.3	92.3	92.4	92.4	92.4	92.5
≥ 600	54.7	85.7	88.3	89.8	91.6	91.9	92.7	93.0	93.1	93.2	93.3	93.3	93.4	93.4	93.4	93.4
≥ 500	54.7	85.9	88.5	90.1	92.0	92.4	93.4	94.0	94.1	94.3	94.4	94.4	94.5	94.5	94.5	94.5
≥ 400	54.7	86.0	88.8	90.5	92.4	93.2	94.7	95.3	95.5	96.0	96.0	96.0	96.2	96.2	96.2	96.3
≥ 300	54.7	86.0	88.9	90.6	92.6	93.4	95.2	95.9	96.2	97.1	97.1	97.1	97.4	97.4	97.4	97.5
≥ 200	54.7	86.1	89.0	90.6	92.8	93.6	95.5	96.4	96.7	97.9	98.2	98.2	98.6	98.7	98.8	98.9
≥ 100	54.7	86.1	89.0	90.6	92.8	93.6	95.6	96.4	96.8	98.1	98.4	98.5	99.0	99.1	99.3	99.6
≥ 0	54.7	86.1	89.0	90.6	92.8	93.6	95.6	96.4	96.8	98.1	98.4	98.5	99.0	99.1	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	36.6	55.2	57.1	57.8	58.3	58.5	58.9	59.0	59.0	59.2	59.3	59.3	59.3	59.3	59.6	59.6
≥ 20000	39.4	59.9	61.9	62.6	63.3	63.4	63.9	64.0	64.0	64.2	64.4	64.4	64.4	64.4	64.6	64.6
≥ 18000	39.5	60.3	62.3	63.0	63.6	63.7	64.2	64.3	64.3	64.6	64.7	64.7	64.7	64.7	64.9	64.9
≥ 16000	39.6	60.3	62.3	63.0	63.6	63.8	64.2	64.3	64.3	64.6	64.7	64.7	64.7	64.7	65.0	65.0
≥ 14000	40.2	61.4	63.4	64.1	64.7	64.9	65.4	65.5	65.5	65.7	65.9	65.9	65.9	65.9	66.1	66.1
≥ 12000	41.3	63.7	65.8	66.5	67.2	67.3	67.8	67.9	67.9	68.2	68.3	68.3	68.3	68.3	68.5	68.5
≥ 10000	42.3	66.1	68.2	68.9	69.5	69.7	70.1	70.2	70.2	70.5	70.6	70.6	70.6	70.6	70.9	70.9
≥ 9000	42.6	66.8	68.9	69.6	70.3	70.5	70.9	71.0	71.0	71.3	71.4	71.4	71.4	71.4	71.7	71.7
≥ 8000	43.3	68.4	70.5	71.3	72.0	72.2	72.7	72.7	72.7	73.0	73.2	73.2	73.2	73.2	73.4	73.4
≥ 7000	44.0	70.0	72.1	72.9	73.6	73.8	74.2	74.3	74.3	74.6	74.8	74.8	74.8	74.8	75.0	75.0
≥ 6000	44.8	72.0	74.3	75.1	75.8	76.0	76.4	76.5	76.5	76.8	77.0	77.0	77.0	77.0	77.2	77.2
≥ 5000	45.5	73.5	76.1	77.0	77.7	77.8	78.3	78.4	78.4	78.6	78.8	78.8	78.8	78.8	79.0	79.0
≥ 4500	45.6	74.0	76.6	77.6	78.3	78.4	78.9	79.0	79.0	79.3	79.4	79.4	79.4	79.4	79.7	79.7
≥ 4000	46.0	74.8	77.5	78.6	79.3	79.5	79.9	80.1	80.1	80.4	80.5	80.5	80.5	80.5	80.7	80.7
≥ 3500	46.6	76.0	78.8	79.9	80.7	80.8	81.3	81.4	81.4	81.7	81.9	81.9	81.9	81.9	82.1	82.1
≥ 3000	46.8	76.5	79.5	80.7	81.5	81.6	82.1	82.3	82.3	82.6	82.7	82.7	82.7	82.7	82.9	82.9
≥ 2500	47.5	78.0	81.1	82.3	83.2	83.3	83.8	84.0	84.0	84.3	84.4	84.4	84.4	84.4	84.7	84.7
≥ 2000	47.9	79.4	82.5	83.8	84.8	84.9	85.5	85.7	85.7	86.0	86.1	86.1	86.1	86.1	86.3	86.3
≥ 1800	48.0	79.7	82.8	84.2	85.1	85.3	85.9	86.1	86.1	86.4	86.5	86.5	86.5	86.5	86.8	86.8
≥ 1500	48.1	80.6	83.9	85.3	86.3	86.4	87.1	87.3	87.3	87.6	87.8	87.8	87.8	87.8	88.0	88.0
≥ 1200	48.2	81.5	85.0	86.4	87.4	87.5	88.2	88.4	88.4	88.7	88.9	88.9	88.9	88.9	89.1	89.1
≥ 1000	48.2	81.7	85.5	87.0	87.9	88.1	88.9	89.1	89.1	89.3	89.5	89.5	89.5	89.5	89.8	89.8
≥ 900	48.2	82.1	85.9	87.4	88.4	88.5	89.3	89.5	89.5	89.8	89.9	89.9	89.9	89.9	90.2	90.2
≥ 800	48.2	82.5	86.3	87.9	88.8	89.0	89.8	89.9	89.9	90.2	90.4	90.4	90.4	90.4	90.6	90.6
≥ 700	48.2	82.7	86.6	88.3	89.5	89.6	90.4	90.6	90.6	90.9	91.1	91.1	91.1	91.1	91.3	91.3
≥ 600	48.2	82.9	86.9	88.7	89.9	90.1	90.9	91.1	91.1	91.4	91.6	91.6	91.6	91.6	91.9	91.9
≥ 500	48.2	83.0	87.3	89.3	90.6	90.7	91.6	91.9	91.9	92.3	92.5	92.5	92.5	92.5	92.8	92.8
≥ 400	48.2	83.3	87.7	89.8	91.3	91.6	92.8	93.3	93.4	94.0	94.2	94.2	94.2	94.2	94.5	94.5
≥ 300	48.2	83.4	87.8	90.3	91.9	92.3	93.6	94.4	94.7	95.6	96.0	96.0	96.0	96.0	96.2	96.2
≥ 200	48.2	83.4	87.8	90.3	91.9	92.4	94.0	95.1	95.4	96.6	97.1	97.1	97.2	97.2	97.5	97.5
≥ 100	48.2	83.4	87.8	90.3	92.0	92.4	94.1	95.1	95.5	96.9	97.7	97.7	98.3	98.3	98.7	99.0
≥ 0	48.2	83.4	87.8	90.3	92.0	92.4	94.1	95.1	95.5	96.9	97.7	97.7	98.3	98.3	98.8	100.0

TOTAL NUMBER OF OBSERVATIONS 2139

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	33.5	51.8	53.9	54.8	55.6	55.8	56.1	56.1	56.2	56.4	56.5	56.5	56.6	56.6	56.8	57.0
≥ 20000	35.7	55.4	57.6	58.7	59.6	59.8	60.1	60.1	60.2	60.4	60.5	60.5	60.6	60.6	60.8	61.0
≥ 18000	35.9	55.7	57.9	59.1	60.0	60.2	60.5	60.5	60.6	60.8	60.9	60.9	61.0	61.0	61.2	61.4
≥ 16000	36.2	56.0	58.2	59.3	60.3	60.5	60.8	60.8	60.9	61.1	61.2	61.2	61.3	61.3	61.5	61.7
≥ 14000	36.6	57.3	59.5	60.6	61.5	61.7	62.1	62.2	62.3	62.4	62.5	62.5	62.7	62.7	62.8	63.0
≥ 12000	37.4	59.2	61.5	62.6	63.5	63.7	64.1	64.2	64.3	64.4	64.5	64.5	64.7	64.7	64.8	65.0
≥ 10000	39.0	61.8	64.2	65.5	66.5	66.7	67.0	67.1	67.2	67.3	67.4	67.4	67.6	67.6	67.8	68.0
≥ 9000	39.7	62.9	65.3	66.6	67.6	67.8	68.2	68.3	68.4	68.5	68.6	68.6	68.8	68.8	69.0	69.2
≥ 8000	40.5	64.7	67.4	68.7	69.6	69.8	70.4	70.4	70.5	70.7	70.8	70.8	70.9	70.9	71.1	71.3
≥ 7000	40.8	65.5	68.4	69.7	70.8	71.0	71.5	71.5	71.6	71.8	71.9	71.9	72.1	72.1	72.3	72.5
≥ 6000	41.3	66.4	69.4	70.8	71.8	72.1	72.6	72.6	72.7	72.9	73.0	73.0	73.1	73.1	73.3	73.5
≥ 5000	42.9	68.3	71.4	72.8	74.1	74.4	74.9	74.9	75.0	75.2	75.3	75.3	75.4	75.4	75.6	75.8
≥ 4500	43.3	68.9	72.2	73.6	74.9	75.2	75.7	75.7	75.8	76.0	76.1	76.1	76.3	76.3	76.5	76.7
≥ 4000	43.8	70.1	73.3	74.8	76.0	76.3	76.9	76.9	77.0	77.2	77.3	77.3	77.4	77.4	77.6	77.8
≥ 3500	44.2	71.0	74.3	75.7	77.0	77.3	77.9	77.9	78.1	78.2	78.3	78.3	78.5	78.5	78.7	78.9
≥ 3000	44.5	71.9	75.2	76.8	78.1	78.4	79.0	79.0	79.1	79.3	79.4	79.4	79.5	79.5	79.7	79.9
≥ 2500	44.9	73.3	76.9	78.5	79.7	80.1	80.6	80.7	80.8	80.9	81.0	81.0	81.2	81.2	81.4	81.6
≥ 2000	45.5	74.9	78.6	80.2	81.5	81.8	82.5	82.5	82.6	82.8	82.9	82.9	83.0	83.0	83.2	83.4
≥ 1800	45.8	75.2	78.9	80.6	81.9	82.2	82.8	82.9	83.0	83.1	83.2	83.2	83.4	83.4	83.6	83.8
≥ 1500	46.3	75.9	79.6	81.4	82.8	83.1	83.7	83.8	83.9	84.1	84.2	84.2	84.3	84.3	84.5	84.7
≥ 1200	46.7	77.1	81.1	83.0	84.7	85.0	85.6	85.7	85.9	85.9	86.1	86.1	86.2	86.2	86.4	86.6
≥ 1000	46.7	77.6	81.8	83.8	85.8	86.2	86.8	86.9	87.0	87.2	87.3	87.3	87.4	87.4	87.6	87.8
≥ 900	46.7	77.8	82.1	84.1	86.2	86.5	87.1	87.2	87.3	87.5	87.6	87.6	87.7	87.7	87.9	88.2
≥ 800	46.8	78.5	83.1	85.2	87.3	87.6	88.2	88.4	88.5	88.7	88.8	88.8	89.0	89.0	89.2	89.4
≥ 700	47.0	79.0	83.9	86.2	88.3	88.6	89.3	89.6	89.7	90.0	90.1	90.1	90.3	90.3	90.5	90.7
≥ 600	47.1	79.3	84.5	86.8	89.1	89.4	90.3	90.7	90.8	91.1	91.2	91.2	91.4	91.4	91.6	91.8
≥ 500	47.1	79.4	84.7	87.1	89.7	90.2	91.2	91.8	91.9	92.3	92.5	92.5	92.7	92.7	92.9	93.1
≥ 400	47.1	79.7	85.1	87.7	90.9	91.3	92.7	93.5	93.6	94.1	94.3	3	94.5	94.5	94.7	94.9
≥ 300	47.1	79.7	85.3	88.3	91.6	92.1	93.9	94.8	94.9	95.6	95.8	. .8	96.1	96.1	96.3	96.5
≥ 200	47.1	79.7	85.3	88.4	91.7	92.2	94.4	95.4	95.5	96.4	96.7	96.7	97.0	97.0	97.3	97.5
≥ 100	47.1	79.7	85.3	88.4	91.7	92.2	94.4	95.5	95.6	96.7	97.1	97.1	97.5	97.5	98.2	98.5
≥ 0	47.1	79.7	85.3	88.4	91.7	92.2	94.4	95.5	95.6	96.7	97.1	97.1	97.6	97.7	98.4	100.0

TOTAL NUMBER OF OBSERVATIONS 1950

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	28.6	47.2	49.5	51.2	52.1	52.2	52.9	52.9	53.0	53.3	53.5	53.5	53.8	53.8	54.0	54.3
≥ 20000	30.6	50.8	53.2	54.9	56.1	56.2	56.9	56.9	57.0	57.3	57.5	57.5	57.8	57.8	58.0	58.3
≥ 18000	30.8	51.1	53.6	55.3	56.5	56.6	57.4	57.4	57.4	57.7	58.0	58.0	58.3	58.3	58.5	58.7
≥ 16000	30.8	51.2	53.6	55.3	56.6	56.7	57.4	57.4	57.5	57.8	58.1	58.1	58.3	58.3	58.5	58.8
≥ 14000	31.3	52.6	55.1	56.8	58.1	58.2	58.9	58.9	59.0	59.3	59.5	59.5	59.8	59.8	60.0	60.3
≥ 12000	32.4	54.7	57.4	59.1	60.4	60.5	61.4	61.4	61.5	61.8	62.1	62.1	62.3	62.3	62.5	62.8
≥ 10000	33.7	57.0	59.7	61.4	62.7	62.8	63.8	63.8	63.9	64.2	64.5	64.5	64.7	64.7	64.9	65.2
≥ 9000	34.3	58.1	60.9	62.6	63.9	64.1	65.1	65.1	65.2	65.5	65.7	65.7	66.0	66.0	66.2	66.5
≥ 8000	35.3	60.1	63.0	64.8	66.1	66.2	67.2	67.3	67.3	67.6	67.9	67.9	68.2	68.2	68.4	68.6
≥ 7000	35.7	60.8	63.9	65.7	67.0	67.1	68.2	68.2	68.3	68.6	68.8	68.8	69.1	69.1	69.3	69.5
≥ 6000	36.4	62.0	65.1	66.9	68.2	68.3	69.3	69.4	69.4	69.7	70.0	70.0	70.3	70.3	70.5	70.7
≥ 5000	37.2	63.5	66.7	68.6	69.8	70.0	71.0	71.1	71.1	71.4	71.7	71.7	71.9	71.9	72.2	72.4
≥ 4500	37.8	64.3	67.5	69.4	70.8	70.9	72.0	72.1	72.1	72.4	72.7	72.7	72.9	72.9	73.1	73.4
≥ 4000	38.3	65.7	69.1	71.1	72.6	72.8	73.8	73.9	73.9	74.3	74.5	74.5	74.8	74.8	75.0	75.2
≥ 3500	38.7	66.7	70.3	72.3	73.8	73.9	75.0	75.1	75.1	75.4	75.7	75.7	75.9	75.9	76.2	76.4
≥ 3000	39.1	67.6	71.3	73.4	75.0	75.1	76.3	76.4	76.4	76.7	77.0	77.0	77.2	77.2	77.4	77.7
≥ 2500	39.5	68.9	72.5	74.7	76.5	76.6	77.7	77.8	77.9	78.3	78.5	78.5	78.8	78.8	79.0	79.2
≥ 2000	40.0	70.4	74.1	76.4	78.3	78.5	79.6	79.6	79.8	80.2	80.5	80.5	80.7	80.7	80.9	81.2
≥ 1800	40.3	70.9	74.8	77.1	79.0	79.1	80.3	80.5	80.5	80.9	81.1	81.1	81.4	81.4	81.6	81.8
≥ 1500	40.9	71.9	75.7	78.1	79.9	80.1	81.3	81.5	81.5	81.9	82.2	82.2	82.4	82.4	82.6	82.9
≥ 1200	41.3	72.6	76.5	78.8	80.8	81.0	82.2	82.4	82.5	82.8	83.1	83.1	83.3	83.3	83.5	83.8
≥ 1000	41.4	73.3	77.3	79.7	81.9	82.3	83.5	83.7	83.8	84.2	84.4	84.4	84.7	84.7	84.9	85.1
≥ 900	41.6	73.9	78.1	80.6	82.8	83.2	84.4	84.6	84.7	85.0	85.3	85.3	85.5	85.5	85.7	86.0
≥ 800	41.7	74.3	79.1	81.7	84.1	84.5	85.8	86.1	86.1	86.5	86.7	86.7	87.0	87.0	87.2	87.4
≥ 700	41.9	75.3	79.9	82.6	85.3	85.8	87.2	87.4	87.5	87.9	88.2	88.2	88.4	88.4	88.6	88.9
≥ 600	41.9	75.9	80.6	83.6	86.6	87.1	88.7	88.9	88.9	89.4	89.6	89.6	89.9	89.9	90.1	90.4
≥ 500	41.9	76.1	81.0	84.2	87.4	87.9	89.6	89.8	89.9	90.4	90.8	90.8	91.1	91.1	91.3	91.5
≥ 400	41.9	76.2	81.2	84.5	87.8	88.4	90.3	90.7	90.9	91.4	91.8	91.8	92.1	92.1	92.3	92.6
≥ 300	42.0	76.3	81.4	84.9	88.6	89.1	91.4	92.2	92.4	93.2	93.8	93.8	94.1	94.1	94.3	94.6
≥ 200	42.0	76.4	81.5	85.0	88.7	89.4	92.0	93.0	93.2	94.4	95.3	95.3	95.7	95.7	95.9	96.2
≥ 100	42.0	76.4	81.5	85.0	88.7	89.4	92.0	93.2	93.4	94.9	95.9	95.9	96.9	97.0	97.5	98.1
≥ 0	42.0	76.4	81.5	85.0	88.7	89.4	92.0	93.2	93.4	94.9	95.9	95.9	97.1	97.3	98.3	100.0

TOTAL NUMBER OF OBSERVATIONS 1950

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	21.5	38.7	41.0	43.1	44.9	45.2	46.1	46.6	46.8	47.6	48.0	48.0	48.4	48.4	48.6	49.2
≥ 20000	24.0	42.9	45.6	48.3	50.3	50.5	51.5	51.9	52.1	53.0	53.4	53.4	54.1	54.1	54.4	55.1
≥ 18000	24.1	43.2	45.8	48.5	50.5	50.7	51.7	52.2	52.4	53.2	53.7	53.7	54.3	54.4	54.6	55.3
≥ 16000	24.1	43.4	46.0	48.7	50.7	50.9	51.9	52.4	52.6	53.4	53.9	53.9	54.5	54.6	54.8	55.5
≥ 14000	24.6	44.7	47.5	50.3	52.4	52.6	53.6	54.1	54.3	55.2	55.6	55.6	56.3	56.3	56.6	57.3
≥ 12000	25.3	46.2	49.1	51.9	54.1	54.3	55.3	55.8	56.0	56.9	57.4	57.4	58.0	58.1	58.3	59.0
≥ 10000	26.9	49.4	52.4	55.4	57.7	57.9	59.0	59.5	59.7	60.8	61.3	61.3	62.0	62.0	62.3	63.0
≥ 9000	27.1	50.2	53.3	56.2	58.6	58.9	60.0	60.5	60.7	61.8	62.3	62.3	63.0	63.1	63.3	64.0
≥ 8000	27.8	51.9	55.1	58.3	60.9	61.2	62.4	62.9	63.2	64.2	64.7	64.7	65.4	65.5	65.7	66.4
≥ 7000	28.4	52.7	56.0	59.2	61.8	62.0	63.3	63.8	64.0	65.1	65.6	65.6	66.3	66.3	66.6	67.3
≥ 6000	29.1	53.7	57.1	60.3	63.0	63.3	64.5	65.1	65.3	66.4	66.9	66.9	67.6	67.6	67.9	68.6
≥ 5000	29.8	55.0	58.5	61.7	64.5	64.8	66.1	66.6	67.0	68.0	68.5	68.5	69.3	69.3	69.6	70.3
≥ 4500	30.2	56.0	59.6	62.9	65.6	65.9	67.3	67.8	68.1	69.2	69.7	69.7	70.4	70.5	70.8	71.5
≥ 4000	31.1	57.5	61.4	64.8	67.5	67.8	69.2	69.7	70.1	71.3	71.8	71.8	72.6	72.6	72.9	73.6
≥ 3500	31.5	58.3	62.4	65.8	68.6	68.9	70.2	70.8	71.2	72.4	72.9	72.9	73.7	73.8	74.0	74.8
≥ 3000	31.7	59.2	63.4	66.9	69.7	70.0	71.4	72.0	72.4	73.6	74.1	74.1	74.9	75.0	75.2	75.9
≥ 2500	32.1	60.5	65.1	68.7	71.6	71.9	73.3	73.9	74.3	75.5	76.1	76.1	76.9	77.0	77.2	77.9
≥ 2000	32.6	61.7	66.4	70.2	73.2	73.5	75.1	75.7	76.1	77.3	77.8	77.8	78.7	78.7	79.0	79.7
≥ 1800	33.0	62.3	67.2	71.0	73.9	74.2	75.8	76.4	76.9	78.0	78.6	78.6	79.4	79.5	79.7	80.5
≥ 1500	33.2	63.0	67.9	71.8	74.8	75.2	76.9	77.5	77.9	79.2	79.8	79.8	80.6	80.7	80.9	81.6
≥ 1200	33.7	64.2	69.3	73.3	76.3	76.8	78.6	79.2	79.6	80.9	81.5	81.5	82.3	82.3	82.6	83.3
≥ 1000	33.8	65.0	70.3	74.4	77.5	77.9	79.7	80.3	80.7	82.0	82.6	82.6	83.5	83.5	83.8	84.5
≥ 900	34.0	65.8	71.4	75.5	78.7	79.2	80.9	81.5	81.9	83.3	83.9	83.9	84.8	84.8	85.1	85.8
≥ 800	34.2	66.6	72.4	76.7	79.9	80.4	82.2	82.9	83.4	84.8	85.3	85.3	86.2	86.2	86.5	87.2
≥ 700	34.3	67.0	73.1	77.5	80.9	81.5	83.5	84.2	84.8	86.2	86.8	86.8	87.7	87.7	88.0	88.7
≥ 600	34.4	67.4	73.6	78.2	81.8	82.6	84.6	85.3	85.9	87.4	87.9	88.0	88.9	88.9	89.2	89.9
≥ 500	34.6	68.3	74.8	79.7	83.4	84.1	86.6	87.3	87.9	89.5	90.1	90.2	91.1	91.1	91.4	92.1
≥ 400	34.6	68.5	75.1	80.1	84.0	84.8	87.5	88.5	89.1	90.7	91.5	91.5	92.5	92.5	92.8	93.6
≥ 300	34.6	68.5	75.2	80.5	84.5	85.3	88.3	89.3	90.0	91.8	92.7	92.8	93.9	93.9	94.3	95.2
≥ 200	34.6	68.6	75.2	80.5	84.6	85.3	88.6	89.6	90.4	92.6	93.6	93.7	95.1	95.2	95.7	96.7
≥ 100	34.6	68.6	75.2	80.5	84.6	85.3	88.6	89.6	90.4	92.7	93.9	94.0	95.6	95.7	96.6	98.1
0	34.6	68.6	75.2	80.5	84.6	85.3	88.6	89.6	90.4	92.7	94.0	94.0	95.7	95.9	97.2	100.0

TOTAL NUMBER OF OBSERVATIONS 1949

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	26.0	42.5	44.1	45.3	45.9	46.0	46.3	46.4	46.5	46.6	46.7	46.7	46.7	46.7	46.8	46.8
≥ 20000	30.4	49.4	51.5	52.8	53.5	53.6	53.9	54.1	54.1	54.3	54.4	54.4	54.5	54.5	54.6	54.6
≥ 18000	30.4	49.5	51.7	53.0	53.6	53.7	54.1	54.2	54.3	54.4	54.6	54.6	54.6	54.7	54.7	54.7
≥ 16000	30.6	49.9	52.0	53.4	54.0	54.1	54.5	54.6	54.7	54.8	55.0	55.0	55.1	55.1	55.2	55.2
≥ 14000	31.3	51.1	53.3	54.6	55.3	55.5	55.8	56.0	56.1	56.2	56.4	56.4	56.4	56.5	56.5	56.5
≥ 12000	32.0	52.6	54.9	56.3	57.0	57.1	57.5	57.6	57.7	57.9	58.0	58.0	58.1	58.1	58.2	58.2
≥ 10000	33.1	55.9	58.4	60.0	60.8	61.0	61.4	61.5	61.6	61.8	61.9	61.9	62.0	62.0	62.1	62.1
≥ 9000	33.4	56.5	59.2	60.9	61.7	62.0	62.4	62.5	62.6	62.8	63.0	63.0	63.0	63.1	63.1	63.1
≥ 8000	33.8	57.8	60.6	62.5	63.6	63.9	64.3	64.4	64.5	64.7	64.9	64.9	64.9	65.0	65.0	65.0
≥ 7000	34.2	58.8	61.7	63.7	64.7	65.0	65.4	65.6	65.7	65.8	66.0	66.0	66.0	66.1	66.1	66.1
≥ 6000	35.1	60.2	63.3	65.3	66.3	66.6	67.0	67.2	67.3	67.4	67.6	67.6	67.6	67.7	67.7	67.7
≥ 5000	35.8	61.2	64.4	66.7	67.9	68.2	68.7	68.8	68.9	69.1	69.2	69.2	69.3	69.3	69.4	69.4
≥ 4500	36.4	62.3	65.5	67.8	69.0	69.3	69.7	69.9	70.0	70.1	70.3	70.3	70.3	70.4	70.4	70.4
≥ 4000	36.8	63.6	66.9	69.4	70.7	71.0	71.5	71.7	71.8	72.0	72.2	72.2	72.2	72.3	72.3	72.3
≥ 3500	37.3	64.7	68.1	70.5	71.9	72.2	72.6	72.9	73.1	73.3	73.4	73.4	73.5	73.5	73.6	73.6
≥ 3000	37.9	65.7	69.2	71.9	73.3	73.6	74.2	74.3	74.5	74.7	74.9	74.9	74.9	75.0	75.0	75.0
≥ 2500	38.7	67.2	70.[illegible]	73.7	75.3	75.6	76.2	76.3	76.5	76.7	76.9	76.9	76.9	77.0	77.0	77.0
≥ 2000	39.4	68.4	72.2	75.3	77.0	77.3	78.0	78.2	78.4	78.6	78.8	78.8	78.8	78.9	78.9	78.9
≥ 1800	39.6	68.9	72.7	75.8	77.5	77.8	78.5	78.7	78.9	79.1	79.3	79.3	79.3	79.4	79.4	79.4
≥ 1500	40.0	70.8	74.7	77.9	79.5	79.9	80.6	80.8	81.0	81.2	81.4	81.4	81.4	81.5	81.5	81.5
≥ 1200	40.4	72.6	76.6	79.9	81.9	82.2	82.9	83.2	83.4	83.7	83.8	83.8	83.9	83.9	84.0	84.0
≥ 1000	40.4	73.6	77.8	81.4	83.6	84.0	84.8	85.1	85.3	85.5	85.7	85.7	85.8	85.8	85.9	85.9
≥ 900	40.5	73.9	78.2	82.0	84.7	85.4	86.1	86.5	86.7	86.9	87.1	87.1	87.2	87.2	87.3	87.3
≥ 800	40.6	74.8	79.6	83.6	86.4	87.2	88.0	88.3	88.5	88.8	88.9	88.9	89.1	89.1	89.2	89.2
≥ 700	40.7	75.3	80.5	84.9	88.0	88.9	89.8	90.1	90.4	90.6	90.8	90.8	90.9	91.0	91.0	91.0
≥ 600	40.8	75.7	81.0	85.5	88.8	89.7	90.9	91.3	91.5	91.7	91.9	91.9	92.0	92.1	92.2	92.2
≥ 500	40.9	76.1	81.4	86.4	90.3	91.3	92.7	93.1	93.3	93.7	93.8	93.8	94.0	94.0	94.2	94.2
≥ 400	41.0	76.4	81.7	87.0	91.0	92.2	93.8	94.5	94.8	95.3	95.5	95.5	95.7	95.7	95.9	95.9
≥ 300	41.1	76.6	82.1	87.5	92.0	93.3	95.4	96.3	96.7	97.3	97.8	97.9	98.1	98.2	98.3	98.3
≥ 200	41.1	76.7	82.2	87.6	92.1	93.4	95.5	96.5	97.0	98.0	98.4	98.5	98.9	99.0	99.3	99.3
≥ 100	41.1	76.7	82.2	87.6	92.1	93.4	95.5	96.6	97.1	98.1	98.6	98.6	99.1	99.2	99.5	99.5
≥ 0	41.1	76.7	82.2	87.6	92.1	93.4	95.5	96.6	97.1	98.1	98.6	98.6	99.1	99.2	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 1949

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (E.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	37.0	47.5	47.7	47.9	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0
≥ 20000	43.7	57.2	57.4	57.6	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7
≥ 18000	43.8	57.3	57.6	57.7	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8
≥ 16000	44.0	57.8	58.0	58.2	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3
≥ 14000	45.0	59.1	59.4	59.5	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6
≥ 12000	45.8	60.3	60.6	60.8	60.9	60.9	60.9	60.9	60.9	60.9	60.9	60.9	60.9	60.9	60.9	60.9
≥ 10000	47.2	63.1	63.4	63.5	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6
≥ 9000	47.5	63.8	64.2	64.4	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5
≥ 8000	48.1	64.9	65.4	65.7	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 7000	48.7	66.0	66.5	66.8	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0
≥ 6000	49.3	67.2	67.8	68.0	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 5000	50.6	69.3	70.1	70.4	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 4500	51.3	70.4	71.2	71.5	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 4000	52.6	72.4	73.2	73.6	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 3500	53.8	73.8	74.6	75.0	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6
≥ 3000	55.7	76.6	77.5	78.0	78.6	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7
≥ 2500	57.4	79.3	80.3	81.0	81.5	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 2000	58.4	81.0	82.0	82.8	83.5	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 1800	58.7	82.0	83.2	83.9	84.7	84.7	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 1500	59.2	83.7	84.9	85.6	86.5	86.5	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6
≥ 1200	60.1	86.2	87.6	88.6	89.8	89.9	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 1000	60.3	86.9	88.5	89.6	91.2	91.4	91.6	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7
≥ 900	60.4	87.3	89.2	90.4	92.2	92.4	92.7	92.7	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 800	60.4	87.6	89.9	91.2	93.3	93.5	93.8	94.1	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 700	60.5	88.0	90.3	92.0	94.4	94.7	95.1	95.4	95.4	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 600	60.5	88.2	90.7	92.6	95.4	95.7	96.5	96.9	97.0	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 500	60.5	88.6	91.1	93.0	95.8	96.3	97.2	98.0	98.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 400	60.6	88.8	91.3	93.3	96.3	96.7	97.8	98.6	98.7	98.9	99.0	99.0	99.1	99.1	99.1	99.1
≥ 300	60.6	88.8	91.3	93.3	96.4	96.9	98.1	98.9	99.0	99.3	99.5	99.5	99.6	99.6	99.6	99.6
≥ 200	60.6	88.8	91.3	93.3	96.4	96.9	98.1	99.1	99.3	99.6	99.8	99.8	99.9	99.9	99.9	99.9
≥ 100	60.6	88.8	91.3	93.3	96.4	96.9	98.1	99.1	99.3	99.6	99.8	99.8	99.9	99.9	100.0	100.0
≥ 0	60.6	88.8	91.3	93.3	96.4	96.9	98.1	99.1	99.3	99.6	99.8	99.8	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1949

USAFETAC FORM JR 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAF PROCESSING DIVISION
ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	40.5	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0
≥ 20000	48.4	59.4	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5
≥ 18000	48.5	59.7	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8
≥ 16000	48.7	60.2	60.2	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3
≥ 14000	49.5	61.2	61.2	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 12000	51.[illegible]	63.3	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4
≥ 10000	53.[illegible]	66.7	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 9000	54.4	68.1	68.2	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 8000	55.7	70.5	70.7	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8
≥ 7000	56.2	71.3	71.5	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 6000	57.0	72.6	72.9	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0
≥ 5000	58.4	74.8	75.2	75.3	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4
≥ 4500	59.1	75.9	76.6	76.7	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8
≥ 4000	60.2	77.8	78.5	78.7	78.8	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9
≥ 3500	61.1	79.3	80.0	80.3	80.4	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 3000	62.4	81.3	82.0	82.4	82.5	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 2500	63.7	83.8	84.6	85.0	85.1	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2
≥ 2000	64.2	85.1	86.2	86.6	86.8	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9
≥ 1800	64.4	85.6	86.8	87.[illegible]	87.4	87.5	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6
≥ 1500	64.7	86.7	87.9	88.5	89.0	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 1200	64.9	88.1	89.5	90.4	91.0	91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 1000	65.1	88.7	90.2	91.6	92.2	92.5	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7
≥ 900	65.1	88.9	90.6	92.1	92.8	93.2	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 800	65.3	89.2	91.1	93.0	94.[illegible]	94.6	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 700	65.3	89.5	91.4	93.5	94.7	95.3	95.7	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 600	65.3	89.6	91.7	94.0	95.4	96.1	96.7	96.8	96.9	97.0	97.0	97.0	97.0	97.0	97.0
≥ 500	65.4	89.8	92.1	94.4	96.0	96.9	97.5	97.7	97.7	97.8	97.8	97.8	97.8	97.8	97.8
≥ 400	65.4	89.9	92.4	94.7	96.4	97.3	98.2	98.5	98.7	98.9	98.9	98.9	98.9	98.9	98.9
≥ 300	65.4	89.9	92.4	94.7	96.5	97.4	98.3	98.7	98.9	99.3	99.3	99.3	99.4	99.4	99.4
≥ 200	65.4	90.0	92.4	94.8	96.6	97.5	98.4	98.9	99.2	99.7	99.8	99.8	100.0	100.0	100.0
≥ 100	65.4	90.0	92.4	94.8	96.6	97.5	98.4	98.9	99.2	99.7	99.8	99.8	100.0	100.0	100.0
≥ 0	65.4	90.0	92.4	94.8	96.6	97.5	98.4	98.9	99.2	99.7	99.8	99.8	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1950

USAFETAC FORM NO. 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	39.9	52.4	52.9	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4
≥ 20000	43.8	59.3	60.0	60.6	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 18000	44.1	59.7	60.4	61.0	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1
≥ 16000	44.1	59.8	60.6	61.2	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 14000	45.2	61.3	62.1	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8
≥ 12000	46.4	63.5	64.3	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 10000	48.4	66.9	67.6	68.4	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5
≥ 9000	49.1	68.4	69.2	70.0	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 8000	51.0	71.6	72.5	73.3	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4
≥ 7000	51.6	72.8	73.6	74.5	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6
≥ 6000	52.3	74.1	75.0	75.8	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9
≥ 5000	53.7	76.4	77.3	78.3	78.3	78.3	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 4500	54.3	77.1	78.1	79.0	79.1	79.1	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2
≥ 4000	55.0	78.2	79.2	80.3	80.3	80.3	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 3500	55.5	79.3	80.4	81.4	81.5	81.5	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 3000	56.2	80.5	81.7	82.8	82.9	82.9	83.0	83.0	83.0	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 2500	56.7	81.9	83.4	84.5	84.7	84.7	84.8	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 2000	56.9	82.7	84.2	85.3	85.5	85.5	85.6	85.7	85.7	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 1800	57.1	83.2	84.9	86.1	86.3	86.3	86.4	86.5	86.5	86.6	86.6	86.6	86.6	86.6	86.6	86.6
≥ 1500	57.2	83.7	85.6	86.8	87.1	87.1	87.3	87.4	87.4	87.4	87.4	87.4	87.5	87.5	87.5	87.5
≥ 1200	57.3	84.3	86.3	88.1	88.5	88.5	88.6	88.7	88.7	88.8	88.8	88.8	88.8	88.8	88.8	88.8
≥ 1000	57.6	85.2	87.3	89.1	89.6	89.7	90.1	90.3	90.3	90.4	90.4	90.4	90.4	90.4	90.4	90.4
≥ 900	57.7	85.6	87.7	89.6	90.2	90.4	90.8	91.0	91.0	91.0	91.0	91.0	91.1	91.1	91.1	91.1
≥ 800	57.7	85.8	87.9	89.9	90.9	91.0	91.5	91.7	91.7	92.0	92.0	92.0	92.1	92.1	92.1	92.1
≥ 700	57.8	86.1	88.4	90.6	91.7	91.9	92.4	92.7	92.8	93.0	93.0	93.0	93.1	93.1	93.1	93.1
≥ 600	57.8	86.2	88.7	91.1	92.5	92.7	93.2	93.5	93.6	93.8	93.8	93.8	93.9	93.9	93.9	93.9
≥ 500	57.8	86.5	89.1	91.5	93.1	93.3	94.1	94.4	94.5	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 400	57.8	86.7	89.3	92.1	93.9	94.3	95.4	95.8	95.9	96.4	96.5	96.5	96.5	96.5	96.5	96.6
≥ 300	57.8	86.7	89.4	92.2	94.2	94.5	95.9	96.9	97.0	97.8	98.1	98.1	98.2	98.2	98.2	98.3
≥ 200	57.8	86.7	89.4	92.2	94.3	94.6	96.2	97.3	97.5	98.5	98.9	98.9	99.1	99.1	99.2	99.2
≥ 100	57.8	86.7	89.4	92.2	94.3	94.6	96.2	97.4	97.6	98.7	99.1	99.1	99.3	99.3	99.5	99.5
≥ 0	57.8	86.7	89.4	92.2	94.3	94.6	96.2	97.4	97.6	98.7	99.1	99.1	99.4	99.4	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 1950

USAFETAC FORM AFL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	37.6	54.4	55.3	56.1	56.4	56.5	56.9	56.9	56.9	56.9	56.9	56.9	57.0	57.0	57.1	57.2
≥ 20000	40.6	59.7	60.7	61.7	61.9	62.1	62.4	62.4	62.4	62.5	62.5	62.5	62.5	62.5	62.7	62.8
≥ 18000	40.8	60.0	61.0	62.0	62.3	62.4	62.8	62.8	62.8	62.8	62.8	62.8	62.9	62.9	63.0	63.1
≥ 16000	41.0	60.2	61.2	62.2	62.4	62.6	62.9	62.9	62.9	63.0	63.0	63.0	63.0	63.0	63.2	63.3
≥ 14000	41.6	61.2	62.4	63.4	63.7	63.8	64.2	64.2	64.2	64.3	64.3	64.3	64.3	64.3	64.5	64.6
≥ 12000	42.5	63.1	64.3	65.3	65.6	65.7	66.1	66.1	66.1	66.2	66.2	66.2	66.2	66.2	66.4	66.5
≥ 10000	44.5	66.2	67.4	68.4	68.7	68.8	69.3	69.3	69.3	69.3	69.3	69.3	69.4	69.4	69.5	69.6
≥ 9000	44.8	66.9	68.1	69.1	69.4	69.6	70.0	70.0	70.0	70.0	70.0	70.0	70.1	70.1	70.2	70.3
≥ 8000	46.1	69.3	70.5	71.6	71.8	72.0	72.4	72.4	72.4	72.4	72.4	72.4	72.5	72.5	72.6	72.7
≥ 7000	46.4	70.0	71.4	72.4	72.6	72.8	73.2	73.2	73.2	73.3	73.3	73.3	73.3	73.3	73.5	73.6
≥ 6000	47.2	71.2	72.8	73.9	74.1	74.3	74.7	74.7	74.7	74.7	74.7	74.7	74.8	74.8	74.9	75.1
≥ 5000	48.7	73.5	75.2	76.3	76.6	76.8	77.3	77.3	77.3	77.3	77.3	77.3	77.4	77.4	77.5	77.6
≥ 4500	49.3	74.3	76.1	77.4	77.7	77.9	78.3	78.3	78.3	78.4	78.4	78.4	78.4	78.4	78.6	78.7
≥ 4000	49.7	75.4	77.3	78.6	79.0	79.2	79.7	79.7	79.7	79.8	79.8	79.8	79.8	79.8	80.0	80.1
≥ 3500	50.0	76.5	78.5	79.9	80.2	80.4	81.0	81.0	81.0	81.1	81.1	81.1	81.2	81.2	81.3	81.4
≥ 3000	50.4	77.8	79.8	81.4	81.8	82.0	82.6	82.6	82.6	82.7	82.7	82.7	82.8	82.8	82.9	83.0
≥ 2500	50.7	78.7	80.8	82.4	82.9	83.1	83.8	83.8	83.8	83.9	83.9	83.9	83.9	83.9	84.1	84.2
≥ 2000	51.1	79.6	81.8	83.6	84.1	84.3	85.0	85.0	85.0	85.1	85.1	85.1	85.1	85.1	85 3	85.4
≥ 1800	51.2	79.9	82.1	83.8	84.3	84.5	85.2	85.2	85.2	85.3	85.3	85.3	85.4	85.4	85.5	85.6
≥ 1500	51.4	80.4	82.7	84.6	85.2	85.4	86.1	86.1	86.1	86.2	86.2	86.2	86.3	86.3	86.4	86.6
≥ 1200	51.6	81.0	83.4	85.3	85.9	86.1	86.9	86.9	86.9	87.0	87.0	87.0	87.0	87.0	87.2	87.3
≥ 1000	51.8	81.3	83.7	85.9	86.6	86.8	87.6	87.7	87.7	87.8	87.8	87.8	87.9	87.9	88.0	88.1
≥ 900	51.8	81.7	84.2	86.3	87.0	87.3	88.2	88.4	88.4	88.6	88.6	88.6	88.6	88.6	88.8	88.9
≥ 800	52.0	82.3	85.0	87.3	88.1	88.4	89.6	89.7	89.8	89.9	89.9	89.9	89.9	89.9	90.1	90.2
≥ 700	52.0	82.5	85.5	88.0	88.9	89.2	90.3	90.5	90.6	90.9	90.9	90.9	90.9	90.9	91.1	91.2
≥ 600	52.1	83.2	86.3	88.9	90.0	90.4	91.7	91.9	92.0	92.3	92.3	92.3	92.4	92.4	92.5	92.6
≥ 500	52.2	83.6	87.0	89.8	91.3	91.7	93.2	93.5	93.6	93.9	93.9	93.9	93.9	93.9	94.1	94.2
≥ 400	52.3	83.9	87.3	90.8	92.2	92.7	94.5	94.9	95.0	95.3	95.3	95.3	95.3	95.3	95.5	95.6
≥ 300	52.3	84.0	87.4	91.0	92.8	93.3	95.5	96.1	96.4	96.7	96.8	96.8	96.9	96.9	97.1	97.2
≥ 200	52.3	84.0	87.5	91.1	93.0	93.5	96.0	96.6	96.9	97.6	97.8	97.8	97.9	98.0	98.2	98.3
≥ 100	52.3	84.0	87.5	91.1	93.0	93.5	96.0	96.7	97.0	97.8	98.1	98.1	98.3	98.4	98.7	99.0
≥ 0	52.3	84.0	87.5	91.1	93.0	93.5	96.0	96.7	97.0	97.8	98.2	98.2	98.4	98.4	98.8	100.0

TOTAL NUMBER OF OBSERVATIONS 1948

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	38.7	57.0	58.9	60.0	60.4	60.5	61.2	61.3	61.3	61.4	61.4	61.4	61.4	61.4	61.4	61.4
≥ 20000	41.3	62.2	64.3	65.6	66.0	66.1	66.8	66.9	66.9	67.0	67.0	67.0	67.0	67.0	67.0	67.0
≥ 18000	41.6	62.5	64.7	65.9	66.4	66.4	67.2	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.4
≥ 16000	42.0	63.1	65.2	66.4	66.9	67.0	67.7	67.8	67.8	67.9	67.9	67.9	67.9	67.9	67.9	67.9
≥ 14000	42.7	64.0	66.2	67.5	68.0	68.0	68.7	68.8	68.8	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 12000	43.9	65.8	68.1	69.3	69.8	69.9	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.8
≥ 10000	44.3	67.5	69.9	71.1	71.6	71.6	72.3	72.4	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 9000	45.1	68.6	71.0	72.2	72.7	72.7	73.5	73.6	73.6	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 8000	46.4	70.7	73.3	74.5	75.0	75.1	75.9	76.0	76.0	76.1	76.1	76.1	76.1	76.1	76.1	76.1
≥ 7000	46.7	71.9	74.5	75.8	76.4	76.4	77.2	77.3	77.3	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 6000	47.3	73.2	76.1	77.3	77.9	78.0	78.7	78.9	78.9	79.0	79.1	79.1	79.1	79.1	79.2	79.3
≥ 5000	47.9	74.4	77.5	78.7	79.3	79.3	80.1	80.3	80.3	80.4	80.5	80.5	80.5	80.5	80.6	80.7
≥ 4500	48.4	75.2	78.3	79.5	80.1	80.2	81.0	81.2	81.2	81.3	81.3	81.3	81.3	81.3	81.4	81.5
≥ 4000	48.9	76.4	79.5	80.8	81.3	81.4	82.2	82.5	82.5	82.6	82.6	82.6	82.6	82.6	82.7	82.8
≥ 3500	49.2	77.1	80.3	81.6	82.2	82.2	83.1	83.3	83.3	83.4	83.5	83.5	83.5	83.5	83.6	83.7
≥ 3000	49.3	77.6	80.9	82.2	82.9	82.9	83.8	84.0	84.0	84.2	84.2	84.2	84.2	84.2	84.3	84.4
≥ 2500	49.5	78.4	81.7	83.0	83.7	83.7	84.7	84.9	84.9	85.1	85.1	85.1	85.1	85.1	85.2	85.3
≥ 2000	49.6	79.2	82.7	84.1	84.9	84.9	85.8	86.1	86.1	86.2	86.3	86.3	86.3	86.3	86.4	86.5
≥ 1800	49.6	79.5	83.0	84.4	85.2	85.2	86.2	86.4	86.4	86.6	86.6	86.6	86.6	86.6	86.7	86.8
≥ 1500	50.0	80.5	84.0	85.4	86.3	86.3	87.3	87.6	87.6	87.8	87.8	87.8	87.8	87.8	87.9	88.0
≥ 1200	50.2	81.6	85.2	86.8	87.6	87.7	88.8	89.0	89.0	89.3	89.3	89.3	89.3	89.3	89.4	89.5
≥ 1000	50.2	82.6	86.2	87.7	88.6	88.7	89.7	90.0	90.0	90.2	90.3	90.3	90.3	90.3	90.4	90.5
≥ 900	50.2	82.8	86.5	88.1	89.1	89.2	90.3	90.5	90.5	90.8	90.8	90.8	90.8	90.8	90.9	91.0
≥ 800	50.5	83.4	87.2	89.0	90.0	90.1	91.3	91.5	91.5	91.8	91.8	91.8	91.8	91.8	91.9	92.0
≥ 700	50.5	84.1	88.1	89.9	91.1	91.2	92.3	92.6	92.6	92.9	92.9	92.9	92.9	92.9	93.0	93.1
≥ 600	50.5	84.4	88.5	90.5	91.8	91.9	93.1	93.4	93.4	93.6	93.7	93.7	93.7	93.7	93.8	93.9
≥ 500	50.5	84.8	89.1	91.2	92.8	92.9	94.1	94.5	94.6	94.9	94.9	94.9	94.9	94.9	95.0	95.1
≥ 400	50.6	85.0	89.4	91.6	93.3	93.4	94.8	95.3	95.4	95.7	95.7	95.7	95.7	95.7	95.8	95.9
≥ 300	50.6	85.2	89.7	92.1	93.9	94.0	95.7	96.3	96.4	96.8	96.9	96.9	97.0	97.0	97.1	97.2
≥ 200	50.6	85.2	89.8	92.1	94.0	94.1	96.0	96.7	96.9	97.8	98.1	98.1	98.2	98.2	98.4	98.6
≥ 100	50.6	85.2	89.8	92.1	94.0	94.1	96.0	96.7	96.9	97.9	98.5	98.5	98.8	98.8	99.1	99.4
0	50.6	85.2	89.8	92.1	94.0	94.1	96.0	96.7	96.9	97.9	98.5	98.5	98.8	98.8	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 2047

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	32.0	50.7	53.4	54.6	55.7	55.8	56.4	56.7	56.7	57.0	57.1	57.1	57.2	57.2	57.2	57.5
≥ 20000	34.3	56.0	58.8	60.2	61.4	61.5	62.1	62.4	62.4	62.7	62.8	62.8	62.9	62.9	62.9	63.2
≥ 18000	34.4	56.3	59.1	60.5	61.8	61.8	62.5	62.7	62.8	63.1	63.1	63.1	63.2	63.2	63.3	63.5
≥ 16000	34.6	56.6	59.4	60.9	62.1	62.1	62.8	63.1	63.1	63.4	63.5	63.5	63.6	63.6	63.6	63.9
≥ 14000	35.3	58.0	60.9	62.3	63.6	63.6	64.3	64.5	64.6	64.9	64.9	64.9	65.0	65.0	65.1	65.3
≥ 12000	36.5	60.0	62.9	64.4	65.7	65.7	66.4	66.6	66.7	67.0	67.0	67.0	67.1	67.1	67.2	67.4
≥ 10000	37.3	62.0	64.9	66.4	67.8	67.8	68.5	68.7	68.8	69.1	69.1	69.1	69.2	69.2	69.3	69.5
≥ 9000	37.8	62.7	65.7	67.3	68.6	68.6	69.3	69.6	69.6	69.9	70.0	70.0	70.0	70.0	70.1	70.3
≥ 8000	38.6	65.0	68.2	69.8	71.1	71.2	71.9	72.1	72.1	72.4	72.5	72.5	72.6	72.6	72.6	72.9
≥ 7000	39.1	66.0	69.3	70.9	72.2	72.2	72.9	73.2	73.2	73.5	73.6	73.6	73.7	73.7	73.7	74.0
≥ 6000	39.4	67.2	70.7	72.2	73.6	73.6	74.3	74.5	74.6	74.9	74.9	74.9	75.0	75.0	75.1	75.3
≥ 5000	39.9	68.4	72.0	73.8	75.1	75.2	75.9	76.1	76.1	76.5	76.5	76.5	76.6	76.6	76.7	76.9
≥ 4500	40.2	69.2	72.8	74.5	75.9	76.0	76.6	76.9	76.9	77.3	77.3	77.3	77.4	77.4	77.5	77.7
≥ 4000	40.8	70.4	74.3	76.1	77.6	77.6	78.3	78.6	78.6	79.0	79.0	79.0	79.1	79.1	79.2	79.4
≥ 3500	41.3	71.1	75.1	76.9	78.3	78.4	79.1	79.4	79.4	79.8	79.8	79.8	79.9	79.9	80.0	80.2
≥ 3000	41.6	72.1	76.2	78.1	79.6	79.7	80.4	80.7	80.7	81.1	81.1	81.1	81.2	81.2	81.3	81.5
≥ 2500	41.9	73.4	77.7	79.6	81.2	81.3	82.0	82.3	82.3	82.7	82.7	82.7	82.8	82.8	82.9	83.1
≥ 2000	42.2	74.8	79.3	81.3	82.9	83.0	83.7	84.0	84.0	84.4	84.4	84.4	84.5	84.5	84.6	84.8
≥ 1800	42.3	75.0	79.6	81.6	83.3	83.4	84.1	84.4	84.4	84.8	84.9	84.9	85.0	85.0	85.0	85.3
≥ 1500	42.4	75.9	80.7	82.7	84.3	84.4	85.2	85.6	85.6	86.0	86.0	86.0	86.1	86.1	86.2	86.4
≥ 1200	42.6	76.8	81.8	84.0	85.7	85.8	86.5	86.9	86.9	87.3	87.4	87.4	87.5	87.5	87.5	87.8
≥ 1000	42.8	77.5	82.7	85.0	86.6	86.7	87.6	87.9	88.0	88.3	88.4	88.4	88.5	88.5	88.5	88.8
≥ 900	42.9	77.9	83.1	85.5	87.2	87.3	88.1	88.5	88.6	89.0	89.0	89.0	89.1	89.1	89.2	89.4
≥ 800	43.1	78.3	83.6	86.0	87.8	88.0	88.8	89.2	89.2	89.6	89.7	89.7	89.8	89.8	89.8	90.0
≥ 700	43.1	78.6	84.0	86.6	88.4	88.7	89.6	90.0	90.0	90.4	90.5	90.5	90.6	90.6	90.6	90.9
≥ 600	43.1	78.9	84.5	87.2	89.2	89.5	90.4	90.8	90.9	91.4	91.4	91.4	91.5	91.5	91.6	91.8
≥ 500	43.2	79.5	85.2	88.2	90.3	90.6	91.9	92.4	92.5	93.0	93.0	93.0	93.1	93.1	93.2	93.4
≥ 400	43.2	79.7	85.7	88.7	91.4	91.7	93.1	93.7	93.9	94.3	94.5	94.5	94.6	94.6	94.7	95.0
≥ 300	43.3	79.9	86.0	89.4	92.3	92.7	94.2	94.9	95.0	95.5	95.7	95.7	95.8	95.9	95.9	96.2
≥ 200	43.3	79.9	86.1	89.6	92.7	93.1	94.7	95.6	95.8	96.8	97.3	97.3	97.5	97.5	97.6	97.9
≥ 100	43.3	79.9	86.1	89.6	92.7	93.1	94.7	95.6	95.8	96.9	97.8	97.9	98.2	98.3	98.6	99.0
≥ 0	43.3	79.9	86.1	89.6	92.7	93.1	94.7	95.6	95.8	96.9	97.9	98.0	98.3	98.5	98.9	100.0

TOTAL NUMBER OF OBSERVATIONS 2050

USAFETAC FORM 0-14-5 (OL 1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	23.3	40.5	43.5	45.1	46.5	46.7	47.7	48.1	48.3	49.1	49.4	49.4	49.5	49.6	50.0	50.3
≥ 20000	26.2	46.1	49.4	51.3	53.1	53.5	54.6	55.1	55.[illegible]	[illegible].1	56.4	56.4	56.6	56.7	57.1	57.4
≥ 18000	26.4	46.2	49.7	51.6	53.4	53.8	54.9	55.5	55.[illegible]	56.4	56.8	56.8	56.9	57.0	57.5	57.8
≥ 16000	26.5	46.4	50.0	51.9	53.7	54.0	55.2	55.5	55.[illegible]	56.8	57.1	57.1	57.2	57.4	57.8	58.1
≥ 14000	27.2	47.8	51.3	53.3	55.1	55.5	56.8	57.4	57.5	58.3	58.7	58.7	58.8	58.9	59.4	59.7
≥ 12000	28.4	50.2	54.1	56.3	58.3	58.7	60.0	60.6	60.8	61.6	61.9	61.9	62.1	62.2	62.7	62.9
≥ 10000	30.1	52.8	56.9	59.1	61.1	61.5	63.0	63.7	63.9	64.8	65.2	65.2	65.4	65.6	66.0	66.3
≥ 9000	30.2	53.3	57.4	59.6	61.7	62.0	63.6	64.3	64.5	65.4	65.8	65.8	66.0	66.1	66.6	66.9
≥ 8000	31.0	55.1	59.4	61.7	63.7	64.1	65.7	66.4	66.5	67.5	67.8	67.8	68.0	68.2	68.7	69.0
≥ 7000	31.4	56.5	60.8	63.2	65.4	65.7	67.3	68.0	68.2	69.1	69.5	69.5	69.7	69.9	70.4	70.6
≥ 6000	31.7	57.5	61.8	64.3	66.5	66.8	68.4	69.1	69.3	70.2	70.6	70.6	70.8	70.9	71.5	71.7
≥ 5000	32.3	58.9	63.5	66.0	68.3	68.7	70.3	71.1	71.2	72.2	72.5	72.5	72.7	72.9	73.5	73.8
≥ 4500	32.4	59.5	64.3	66.9	69.2	69.6	71.1	72.0	72.2	73.1	73.5	73.5	73.7	73.8	74.4	74.7
≥ 4000	33.0	60.6	65.5	68.0	70.4	70.8	72.4	73.3	73.5	74.5	74.6	74.8	75.0	75.2	75.7	76.1
≥ 3500	33.2	61.6	66.4	69.0	71.4	71.7	73.4	74.4	74.5	75.5	75.9	75.9	76.1	76.2	76.8	77.1
≥ 3000	33.4	62.6	67.7	70.4	72.8	73.2	74.9	75.9	76.1	77.1	77.5	77.5	77.6	77.8	78.4	78.7
≥ 2500	34.0	63.9	69.1	71.9	74.4	74.8	76.5	77.5	77.6	78.6	79.0	79.0	79.2	79.4	79.9	80.3
≥ 2000	34.4	64.9	70.2	73.3	75.8	76.2	77.8	78.8	79.0	80.0	80.4	80.4	80.6	80.8	81.4	81.7
≥ 1800	34.6	65.2	70.7	73.7	76.3	76.7	78.4	79.4	79.5	80.5	81.0	81.0	81.2	81.3	81.9	82.2
≥ 1500	34.7	65.[illegible]	71.4	74.4	77.0	77.3	79.1	80.2	80.4	81.4	81.8	81.8	82.0	82.2	82.7	83.1
≥ 1200	35.1	67.3	73.0	76.2	78.9	79.4	81.1	82.2	82.4	83.4	83.8	83.8	84.0	84.2	84.7	85.1
≥ 1000	35.3	68.0	74.0	77.3	80.2	80.7	82.5	83.7	83.9	84.9	85.3	85.3	85.5	85.7	86.3	86.6
≥ 900	35.3	68.5	74.6	77.8	80.9	81.4	83.3	84.4	84.6	85.6	86.2	86.2	86.3	86.5	87.1	87.4
≥ 800	35.4	69.4	75.8	79.2	82.4	82.9	84.8	86.0	86.2	87.3	87.8	87.8	88.0	88.1	88.7	89.0
≥ 700	35.5	69.8	76.4	79.9	83.3	84.0	86.[illegible]	87.3	87.4	88.5	89.0	89.0	89.2	89.3	89.9	90.2
≥ 600	35.5	70.6	77.5	81.1	84.7	85.4	87.6	88.8	89.0	90.0	90.5	90.5	90.7	90.9	91.4	91.8
≥ 500	35.6	71.1	78.0	81.8	85.7	86.5	88.8	90.2	90.4	91.4	92.0	92.0	92.2	92.3	92.9	93.2
≥ 400	35.6	71.4	78.5	82.6	87.0	87.8	90.4	92.0	92.2	93.3	93.9	93.9	94.2	94.3	94.9	95.2
≥ 300	35.7	71.[illegible]	78.8	83.1	87.7	88.6	91.4	93.2	93.5	95.1	95.9	96.0	96.3	96.4	97.1	97.4
≥ 200	35.7	71.6	78.9	83.2	87.8	88.7	91.6	93.8	94.1	96.0	96.9	96.9	97.3	97.5	98.2	98.5
≥ 100	35.7	71.6	78.9	83.2	87.8	88.7	91.6	93.8	94.1	96.1	97.1	97.2	97.9	98.1	99.0	99.7
≥ 0	35.7	71.6	78.9	83.2	87.8	88.7	91.6	93.8	94.1	96.1	97.1	97.2	97.9	98.1	99.1	100.0

TOTAL NUMBER OF OBSERVATIONS 2102

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	32.4	46.5	47.6	47.9	48.1	48.3	48.5	48.6	48.7	48.8	48.8	48.8	48.8	48.8	48.9	48.9
≥ 20000	38.4	55.1	56.4	56.9	57.2	57.4	57.6	57.8	57.8	57.9	57.9	57.9	57.9	58.0	58.1	58.1
≥ 18000	38.6	55.5	56.7	57.3	57.5	57.7	57.9	58.1	58.2	58.3	58.3	58.3	58.3	58.3	58.4	58.4
≥ 16000	38.9	55.9	57.1	57.7	58.0	58.1	58.3	58.5	58.6	58.7	58.7	58.7	58.7	58.7	58.8	58.8
≥ 14000	39.4	57.1	58.4	59.1	59.4	59.5	59.8	59.9	60.0	60.1	60.1	60.1	60.1	60.1	60.2	60.2
≥ 12000	40.3	58.9	60.2	60.8	61.2	61.3	61.5	61.7	61.8	61.9	61.9	61.9	61.9	61.9	62.0	62.0
≥ 10000	41.7	61.7	63.2	64.0	64.4	64.5	64.8	65.0	65.1	65.2	65.2	65.2	65.2	65.2	65.3	65.3
≥ 9000	41.7	61.9	63.4	64.1	64.6	64.7	65.1	65.3	65.3	65.4	65.4	65.4	65.4	65.4	65.5	65.5
≥ 8000	42.8	63.7	65.3	66.0	66.5	66.6	67.1	67.3	67.3	67.4	67.4	67.4	67.4	67.4	67.6	67.6
≥ 7000	43.3	65.0	66.6	67.4	67.9	68.0	68.5	68.7	68.7	68.8	68.8	68.8	68.8	68.9	69.0	69.0
≥ 6000	43.6	65.5	67.1	67.9	68.4	68.5	69.0	69.2	69.3	69.3	69.3	69.3	69.3	69.4	69.5	69.5
≥ 5000	44.4	66.7	68.4	69.2	69.8	69.9	70.4	70.6	70.7	70.8	70.9	70.9	70.9	70.9	71.0	71.0
≥ 4500	44.7	67.8	69.3	70.1	70.7	70.9	71.3	71.6	71.6	71.7	71.8	71.8	71.8	71.8	71.9	71.9
≥ 4000	45.4	68.8	70.6	71.4	72.1	72.3	72.7	73.0	73.0	73.1	73.2	73.2	73.2	73.2	73.3	73.3
≥ 3500	45.9	69.9	71.7	72.5	73.2	73.3	73.9	74.1	74.1	74.2	74.3	74.3	74.3	74.4	74.5	74.5
≥ 3000	46.9	71.5	73.3	74.2	74.9	75.1	75.8	76.0	76.1	76.2	76.3	76.3	76.3	76.4	76.4	76.4
≥ 2500	48.2	73.5	75.5	76.6	77.3	77.5	78.3	78.5	78.6	78.7	78.8	78.8	78.8	78.8	78.9	78.9
≥ 2000	49.7	75.7	77.7	78.8	79.5	79.8	80.5	80.8	80.8	81.0	81.1	81.1	81.1	81.1	81.2	81.2
≥ 1800	50.1	76.8	78.8	80.0	80.7	81.0	81.7	82.0	82.0	82.2	82.3	82.3	82.3	82.3	82.4	82.4
≥ 1500	51.0	78.6	80.8	82.0	82.7	83.0	83.8	84.1	84.2	84.3	84.4	84.4	84.4	84.4	84.5	84.5
≥ 1200	51.6	80.0	82.2	83.7	84.5	84.7	85.5	85.9	85.9	86.1	86.2	86.2	86.2	86.2	86.3	86.3
≥ 1000	52.1	81.3	83.8	85.6	86.6	86.9	87.8	88.2	88.2	88.5	88.6	88.6	88.6	88.7	88.8	88.8
≥ 900	52.3	82.2	84.8	86.6	87.7	88.1	89.0	89.5	89.5	89.8	89.8	89.8	89.9	89.9	90.0	90.0
≥ 800	52.3	83.0	85.7	87.6	88.8	89.1	90.2	90.6	90.6	90.9	91.0	91.0	91.0	91.1	91.2	91.2
≥ 700	52.5	84.0	87.0	89.0	90.4	90.8	92.0	92.4	92.4	92.7	92.8	92.8	92.8	92.9	92.9	92.9
≥ 600	52.5	84.5	88.0	90.1	91.6	92.1	93.4	93.9	93.9	94.2	94.3	94.3	94.4	94.4	94.5	94.5
≥ 500	52.5	84.7	88.6	90.7	92.8	93.3	94.8	95.4	95.5	95.8	95.9	95.9	96.0	96.0	96.1	96.1
≥ 400	52.5	84.9	89.1	91.5	94.0	94.7	96.5	97.2	97.3	97.7	97.9	97.9	98.0	98.0	98.1	98.1
≥ 300	52.5	85.0	89.2	91.8	94.3	95.2	97.0	97.8	98.0	98.4	98.7	98.7	98.9	99.0	99.1	99.1
≥ 200	52.5	85.0	89.3	91.9	94.4	95.3	97.2	98.1	98.3	98.7	99.1	99.2	99.3	99.4	99.5	99.5
≥ 100	52.5	85.0	89.3	91.9	94.4	95.3	97.2	98.1	98.4	98.9	99.3	99.3	99.7	99.8	100.0	100.0
≥ 0	52.5	85.0	89.3	91.9	94.4	95.3	97.2	98.1	98.4	98.9	99.3	99.3	99.7	99.8	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2127

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOUR (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	41.6	49.4	49.7	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.9	49.9	49.9	49.9
≥ 20000	49.2	59.1	59.4	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.6	59.6	59.6	59.6
≥ 18000	49.3	59.3	59.6	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.8	59.8	59.8	59.8
≥ 16000	49.4	59.5	59.7	59.8	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9
≥ 14000	50.6	61.1	61.3	61.4	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5
≥ 12000	52.4	63.8	64.2	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3
≥ 10000	54.2	66.7	67.0	67.2	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3
≥ 9000	54.4	67.8	68.2	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 8000	55.6	69.7	70.1	70.4	70.5	70.5	70.5	70.5	70.5	70.5	70.5	70.5	70.6	70.6	70.6	70.6
≥ 7000	56.3	70.8	71.3	71.5	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.7	71.7	71.7	71.7
≥ 6000	56.9	71.6	72.1	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 5000	57.9	73.0	73.6	73.9	74.0	74.0	74.0	74.1	74.1	74.1	74.1	74.1	74.2	74.2	74.2	74.2
≥ 4500	58.5	73.7	74.2	74.5	74.6	74.6	74.6	74.7	74.7	74.7	74.7	74.7	74.8	74.8	74.8	74.8
≥ 4000	59.7	75.2	75.8	76.1	76.2	76.2	76.2	76.3	76.3	76.3	76.3	76.3	76.4	76.4	76.4	76.4
≥ 3500	60.6	76.8	77.5	77.9	78.0	78.0	78.0	78.1	78.1	78.1	78.1	78.1	78.2	78.2	78.2	78.2
≥ 3000	62.7	80.0	80.8	81.2	81.5	81.5	81.6	81.7	81.7	81.7	81.7	81.7	81.8	81.8	81.8	81.8
≥ 2500	64.8	83.3	84.2	84.6	84.9	85.0	85.1	85.3	85.3	85.3	85.3	85.3	85.4	85.4	85.4	85.4
≥ 2000	66.4	85.9	86.9	87.3	87.7	87.7	87.9	88.0	88.0	88.1	88.1	88.1	88.1	88.1	88.1	88.2
≥ 1800	66.6	86.2	87.3	87.7	88.1	88.1	88.3	88.4	88.4	88.5	88.5	88.5	88.6	88.6	88.6	88.6
≥ 1500	66.9	87.3	88.5	89.0	89.7	89.7	89.9	90.1	90.1	90.2	90.2	90.2	90.2	90.2	90.2	90.3
≥ 1200	67.3	89.0	90.3	90.8	91.5	91.6	91.8	92.0	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 1000	67.4	89.8	91.1	91.8	92.5	92.6	92.9	93.0	93.0	93.1	93.1	93.1	93.2	93.2	93.2	93.2
≥ 900	67.4	90.2	91.7	92.5	93.2	93.3	93.6	93.8	93.8	93.9	93.9	93.9	93.9	93.9	93.9	94.0
≥ 800	67.4	90.6	92.1	92.9	93.7	93.9	94.3	94.5	94.5	94.6	94.6	94.6	94.6	94.6	94.6	94.7
≥ 700	67.4	91.1	92.6	93.5	94.4	94.7	95.2	95.3	95.3	95.5	95.5	95.5	95.6	95.6	95.6	95.6
≥ 600	67.4	91.2	92.8	93.9	95.1	95.5	96.1	96.3	96.2	96.5	96.5	96.5	96.6	96.6	96.6	96.6
≥ 500	67.4	91.4	93.0	94.3	95.9	96.3	97.2	97.5	97.5	97.8	97.8	97.8	97.9	97.	97.9	97.9
≥ 400	67.4	91.4	93.1	94.4	96.3	96.8	97.6	98.4	98.4	98.8	98.8	98.8	98.9	98.9	98.9	99.0
≥ 300	67.4	91.5	93.2	94.6	96.5	97.2	98.3	99.1	99.2	99.6	99.7	99.7	99.8	99.8	99.8	99.8
≥ 200	67.4	91.5	93.2	94.6	96.5	97.3	98.4	99.2	99.2	99.7	99.8	99.8	99.9	99.9	99.9	99.9
≥ 100	67.4	91.5	93.2	94.6	96.5	97.3	98.4	99.2	99.2	99.7	99.8	99.8	99.9	100.0	100.0	100.0
≥ 0	67.4	91.5	93.2	94.6	96.5	97.3	98.4	99.2	99.2	99.7	99.8	99.8	99.9	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2126

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	42.9	51.5	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6
≥ 20000	52.0	62.7	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.9	62.9	62.9	62.9	62.9	62.9
≥ 18000	52.2	62.9	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.2	63.2	63.2	63.2	63.2	63.2
≥ 16000	52.2	63.0	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.3	63.3	63.3	63.3	63.3	63.3
≥ 14000	53.8	64.8	64.9	64.9	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 12000	55.5	67.6	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.9	67.9	67.9	67.9	67.9	67.9
≥ 10000	57.5	70.9	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 9000	58.0	71.9	72.0	72.1	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 8000	59.3	73.7	73.9	74.1	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3
≥ 7000	60.1	75.0	75.2	75.5	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 6000	60.9	76.3	76.5	76.9	77.1	77.1	77.1	77.1	77.1	77.1	77.2	77.2	77.2	77.2	77.2	77.2
≥ 5000	61.5	77.4	77.7	78.2	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 4500	62.1	78.3	78.7	79.1	79.3	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4
≥ 4000	63.5	80.7	81.4	82.0	82.3	82.4	82.4	82.4	82.4	82.4	82.5	82.5	82.5	82.5	82.5	82.5
≥ 3500	64.4	82.0	82.7	83.4	83.8	83.9	83.9	83.9	83.9	83.9	84.0	84.0	84.0	84.0	84.0	84.0
≥ 3000	65.3	83.7	84.5	85.3	85.7	85.8	85.9	86.1	86.1	86.1	86.2	86.2	86.2	86.2	86.2	86.2
≥ 2500	66.7	86.1	87.0	87.8	88.2	88.3	88.4	88.5	88.5	88.6	88.7	88.7	88.7	88.7	88.7	88.7
≥ 2000	67.3	87.4	88.4	89.3	89.8	89.9	90.0	90.1	90.1	90.2	90.3	90.3	90.3	90.3	90.3	90.3
≥ 1800	67.4	87.7	88.8	89.7	90.2	90.2	90.3	90.5	90.5	90.6	90.7	90.7	90.7	90.7	90.7	90.7
≥ 1500	67.8	88.5	89.6	90.7	91.2	91.3	91.4	91.6	91.6	91.8	91.9	91.9	91.9	91.9	91.9	91.9
≥ 1200	68.0	89.8	91.0	92.1	92.6	92.8	92.9	93.1	93.1	93.2	93.3	93.3	93.3	93.3	93.3	93.3
≥ 1000	68.1	90.2	91.5	92.6	93.3	93.4	93.7	93.9	93.9	94.1	94.2	94.2	94.2	94.2	94.2	94.2
≥ 900	68.2	90.5	92.0	93.2	94.1	94.2	94.6	94.8	94.8	95.0	95.1	95.1	95.1	95.1	95.1	95.1
≥ 800	68.2	90.9	92.4	93.7	94.6	94.9	95.2	95.4	95.4	95.7	95.8	95.8	95.8	95.8	95.8	95.8
≥ 700	68.2	91.1	92.6	94.1	95.1	95.5	95.9	96.1	96.1	96.3	96.4	96.4	96.4	96.4	96.4	96.4
≥ 600	68.2	91.3	93.0	94.5	95.5	96.0	96.6	96.8	96.8	97.1	97.2	97.2	97.2	97.2	97.2	97.2
≥ 500	68.3	91.5	93.1	94.8	96.0	96.4	97.1	97.5	97.6	98.0	98.1	98.1	98.1	98.1	98.1	98.1
≥ 400	68.3	91.5	93.3	95.0	96.4	96.9	97.9	98.5	98.7	99.1	99.3	99.3	99.3	99.3	99.3	99.3
≥ 300	68.3	91.5	93.3	95.1	96.5	97.0	98.2	98.9	99.1	99.6	99.8	99.8	99.8	99.8	99.8	99.8
≥ 200	68.3	91.5	93.3	95.1	96.5	97.0	98.3	99.0	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	68.3	91.5	93.3	95.1	96.5	97.0	98.3	99.0	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	68.3	91.5	93.3	95.1	96.5	97.0	98.3	99.0	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2102

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	44.5	54.4	54.9	55.2	55.4	55.4	55.6	55.6	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7
≥ 20000	53.1	65.2	65.7	66.2	66.4	66.4	66.6	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7
≥ 18000	53.3	65.4	65.9	66.4	66.6	66.6	66.7	66.8	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9
≥ 16000	53.5	65.7	66.2	66.7	66.8	66.8	67.0	67.1	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2
≥ 14000	55.0	67.4	68.0	68.4	68.6	68.6	68.8	68.9	68.9	68.9	68.9	68.9	69.0	69.0	69.0	69.0
≥ 12000	56.1	69.3	69.9	70.4	70.6	70.6	70.8	70.9	70.9	70.9	70.9	70.9	71.0	71.0	71.0	71.0
≥ 10000	57.8	72.2	72.8	73.2	73.4	73.5	73.7	73.8	73.8	73.8	73.8	73.8	73.9	73.9	73.9	73.9
≥ 9000	58.5	73.3	73.9	74.4	74.5	74.6	74.8	74.9	74.9	74.9	74.9	74.9	75.0	75.0	75.0	75.0
≥ 8000	59.4	75.9	76.7	77.1	77.4	77.4	77.7	77.8	77.8	77.8	77.8	77.8	77.9	77.9	77.9	77.9
≥ 7000	59.9	77.0	77.9	78.4	78.7	78.7	79.0	79.1	79.1	79.1	79.1	79.1	79.2	79.2	79.2	79.2
≥ 6000	60.3	77.8	78.6	79.1	79.6	79.7	79.9	80.0	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 5000	61.0	79.2	80.3	80.7	81.3	81.3	81.6	81.7	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8
≥ 4500	61.2	79.7	80.9	81.4	82.0	82.0	82.3	82.4	82.4	82.4	82.4	82.4	82.5	82.5	82.5	82.5
≥ 4000	62.4	81.8	83.2	83.8	84.3	84.4	84.7	84.8	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 3500	63.0	82.9	84.3	84.9	85.6	85.7	86.0	86.1	86.1	86.1	86.1	86.1	86.2	86.2	86.2	86.2
≥ 3000	63.4	83.7	85.2	85.8	86.5	86.6	87.0	87.2	87.2	87.2	87.2	87.2	87.3	87.3	87.3	87.3
≥ 2500	63.5	85.0	86.6	87.4	88.3	88.4	88.8	89.0	89.0	89.0	89.0	89.0	89.1	89.1	89.1	89.1
≥ 2000	63.6	86.1	87.8	88.5	89.6	89.7	90.1	90.2	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3
≥ 1800	63.6	86.2	87.9	88.7	89.8	89.9	90.2	90.4	90.4	90.4	90.4	90.4	90.5	90.5	90.5	90.5
≥ 1500	63.6	86.4	88.2	89.1	90.2	90.3	90.8	91.0	91.1	91.1	91.1	91.1	91.2	91.2	91.2	91.2
≥ 1200	63.8	87.1	89.1	90.0	91.1	91.3	91.7	92.0	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 1000	63.9	87.8	89.9	91.1	92.3	92.4	93.0	93.3	93.4	93.4	93.4	93.4	93.5	93.5	93.5	93.5
≥ 900	64.0	88.0	90.2	91.6	92.9	93.0	93.6	93.9	94.0	94.0	94.0	94.0	94.1	94.1	94.1	94.1
≥ 800	64.1	88.2	90.7	92.1	93.5	93.7	94.2	94.6	94.7	94.7	94.7	94.7	94.8	94.8	94.8	94.8
≥ 700	64.1	88.4	91.2	92.7	94.4	94.5	95.2	95.5	95.6	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 600	64.1	88.4	91.5	93.1	95.0	95.2	96.0	96.3	96.4	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 500	64.1	88.5	91.6	93.3	95.4	95.7	96.4	97.0	97.1	97.3	97.3	97.3	97.4	97.4	97.4	97.4
≥ 400	64.1	88.6	91.7	93.5	95.7	96.1	96.9	97.8	98.0	98.2	98.5	98.5	98.5	98.5	98.5	98.5
≥ 300	64.1	88.6	91.8	93.5	95.8	96.3	97.3	98.1	98.4	98.8	99.0	99.0	99.1	99.1	99.1	99.1
≥ 200	64.1	88.6	91.8	93.6	95.9	96.4	97.5	98.3	98.6	99.1	99.3	99.4	99.6	99.6	99.6	99.6
≥ 100	64.1	88.6	91.8	93.6	95.9	96.4	97.5	98.4	98.7	99.2	99.4	99.5	99.7	99.7	99.9	99.9
0	64.1	88.6	91.8	93.6	95.9	96.4	97.5	98.4	98.7	99.2	99.4	99.5	99.7	99.7	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2051

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	45.3	60.2	60.8	61.3	61.6	61.6	61.8	61.9	61.9	62.0	62.0	62.0	62.0	62.0	62.0	62.0
≥ 20000	48.9	65.4	66.2	66.7	67.0	67.0	67.2	67.3	67.4	67.4	67.4	67.4	67.5	67.5	67.5	67.5
≥ 18000	49.1	65.7	66.5	67.0	67.3	67.3	67.5	67.6	67.7	67.7	67.7	67.7	67.8	67.8	67.8	67.8
≥ 16000	49.4	66.0	66.9	67.4	67.7	67.7	67.9	68.0	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 14000	50.1	67.5	68.4	68.8	69.1	69.1	69.4	69.5	69.5	69.6	69.6	69.6	69.6	69.6	69.6	69.6
≥ 12000	51.1	68.7	69.6	70.1	70.3	70.3	70.6	70.7	70.7	70.8	70.8	70.8	70.8	70.8	70.8	70.8
≥ 10000	52.2	70.7	71.6	72.2	72.4	72.4	72.7	72.8	72.8	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 9000	52.9	71.9	72.8	73.3	73.6	73.6	73.9	74.0	74.1	74.1	74.1	74.1	74.2	74.2	74.2	74.2
≥ 8000	53.6	74.3	75.2	75.8	76.1	76.1	76.3	76.5	76.5	76.6	76.6	76.6	76.6	76.6	76.6	76.6
≥ 7000	54.7	76.2	77.2	77.8	78.2	78.2	78.4	78.6	78.6	78.7	78.7	78.7	78.7	78.7	78.7	78.7
≥ 6000	55.3	77.3	78.3	78.9	79.3	79.3	79.6	79.7	79.8	79.8	79.8	79.8	79.9	79.9	79.9	79.9
≥ 5000	55.9	78.6	79.6	80.3	80.7	80.7	81.0	81.1	81.2	81.2	81.2	81.2	81.3	81.3	81.3	81.4
≥ 4500	56.3	79.6	80.7	81.4	81.8	81.8	82.1	82.2	82.3	82.3	82.3	82.3	82.4	82.4	82.4	82.5
≥ 4000	56.9	81.0	82.2	82.9	83.3	83.3	83.7	83.8	83.9	83.9	83.9	83.9	84.0	84.0	84.0	84.1
≥ 3500	57.4	82.5	83.8	84.6	85.1	85.1	85.4	85.6	85.6	85.7	85.7	85.7	85.8	85.8	85.8	85.9
≥ 3000	57.6	82.9	84.3	85.1	85.7	85.7	86.1	86.2	86.3	86.3	86.3	86.3	86.4	86.5	86.5	86.5
≥ 2500	57.6	83.7	85.2	86.2	86.8	86.8	87.3	87.5	87.5	87.6	87.6	87.6	87.7	87.7	87.7	87.8
≥ 2000	57.7	84.6	86.4	87.3	87.9	87.9	88.5	88.7	88.7	88.8	88.8	88.8	88.9	88.9	88.9	89.0
≥ 1800	57.7	85.1	86.7	87.6	88.2	88.2	88.8	89.0	89.0	89.1	89.1	89.1	89.2	89.2	89.2	89.3
≥ 1500	57.7	85.7	87.4	88.4	89.0	89.0	89.5	89.8	89.8	89.9	89.9	89.9	90.0	90.1	90.1	90.1
≥ 1200	57.7	86.4	88.1	89.1	89.8	89.8	90.4	90.6	90.7	90.8	90.8	90.8	90.9	90.9	90.9	91.0
≥ 1000	57.7	86.8	88.6	89.6	90.4	90.4	91.0	91.2	91.3	91.4	91.4	91.4	91.5	91.5	91.5	91.5
≥ 900	57.7	87.2	89.2	90.3	91.0	91.1	91.6	91.9	91.9	92.0	92.0	92.0	92.1	92.2	92.2	92.2
≥ 800	57.8	87.6	89.8	91.1	91.8	91.9	92.5	92.8	92.8	92.9	92.9	92.9	93.0	93.1	93.1	93.1
≥ 700	57.8	87.9	90.5	91.8	92.7	93.7	93.4	93.7	93.8	93.9	93.9	93.9	94.0	94.0	94.0	94.1
≥ 600	57.8	88.0	90.6	91.9	93.1	93.1	93.8	94.2	94.2	94.3	94.3	94.3	94.4	94.5	94.5	94.5
≥ 500	57.8	88.2	90.9	92.5	93.8	93.9	94.7	95.2	95.3	95.4	95.4	95.4	95.5	95.5	95.5	95.6
≥ 400	57.8	88.2	91.1	92.7	94.4	94.5	95.5	96.2	96.3	96.5	96.6	96.6	96.7	96.7	96.7	96.8
≥ 300	57.8	88.4	91.4	93.1	95.1	95.2	96.3	97.1	97.3	97.5	97.6	97.6	97.7	97.8	97.8	97.8
≥ 200	57.8	88.5	91.4	93.1	95.2	95.4	96.5	97.4	97.7	98.0	98.2	98.2	98.5	98.5	98.6	98.6
≥ 100	57.8	88.5	91.4	93.1	95.2	95.4	96.5	97.5	97.8	98.3	98.5	98.6	99.0	99.1	99.3	99.4
≥ 0	57.8	88.5	91.4	93.1	95.2	95.4	96.5	97.5	97.8	98.3	98.6	98.6	99.1	99.3	99.5	100.0

TOTAL NUMBER OF OBSERVATIONS 2047

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	43.4	66.3	68.1	69.5	70.0	70.0	70.2	70.2	70.2	70.4	70.6	70.6	70.7	70.7	70.8	70.9
≥ 20000	46.6	71.3	73.1	74.5	75.0	75.1	75.3	75.3	75.3	75.5	75.7	75.7	75.8	75.8	75.9	76.0
≥ 18000	46.7	71.4	73.2	74.6	75.1	75.2	75.4	75.4	75.4	75.6	75.8	75.8	75.9	75.9	76.0	76.1
≥ 16000	46.9	71.6	73.4	74.9	75.3	75.4	75.6	75.6	75.6	75.8	76.0	76.0	76.1	76.1	76.2	76.3
≥ 14000	47.4	72.5	74.4	75.9	76.3	76.4	76.6	76.6	76.6	76.8	77.0	77.0	77.1	77.1	77.2	77.3
≥ 12000	48.3	74.8	76.7	78.2	78.7	78.7	78.9	78.9	78.9	79.1	79.4	79.4	79.5	79.5	79.5	79.6
≥ 10000	49.4	76.9	78.9	80.5	81.0	81.0	81.3	81.3	81.3	81.5	81.7	81.7	81.8	81.8	81.8	81.9
≥ 9000	49.8	77.4	79.4	81.0	81.5	81.6	81.8	81.8	81.8	82.0	82.2	82.2	82.3	82.3	82.4	82.5
≥ 8000	50.5	78.8	80.8	82.4	82.9	83.0	83.2	83.2	83.2	83.4	83.6	83.6	83.7	83.7	83.7	83.9
≥ 7000	51.0	79.8	81.9	83.5	84.0	84.1	84.3	84.3	84.3	84.5	84.7	84.7	84.8	84.8	84.9	85.0
≥ 6000	51.2	80.7	82.7	84.4	84.9	85.0	85.2	85.2	85.2	85.4	85.6	85.6	85.7	85.7	85.8	85.9
≥ 5000	51.6	81.4	83.5	85.2	85.7	85.8	86.0	86.0	86.0	86.2	86.4	86.4	86.5	86.5	86.6	86.7
≥ 4500	51.9	82.2	84.2	85.9	86.4	86.5	86.7	86.7	86.7	86.9	87.1	87.1	87.2	87.2	87.3	87.4
≥ 4000	52.1	82.7	84.9	86.6	87.1	87.1	87.3	87.3	87.3	87.6	87.8	87.8	87.9	87.9	87.9	88.0
≥ 3500	52.2	83.0	85.2	86.9	87.5	87.5	87.7	87.7	87.7	87.9	88.1	88.1	88.2	88.2	88.3	88.4
≥ 3000	52.4	83.7	86.0	87.7	88.3	88.4	88.6	88.6	88.6	88.8	89.0	89.0	89.1	89.1	89.1	89.3
≥ 2500	52.9	84.8	87.0	88.8	89.4	89.4	89.6	89.6	89.6	89.8	90.0	90.0	90.2	90.2	90.2	90.3
≥ 2000	53.4	85.5	87.9	89.6	90.2	90.3	90.5	90.5	90.5	90.7	90.9	90.9	91.0	91.0	91.1	91.2
≥ 1800	53.4	85.7	88.0	89.8	90.4	90.4	90.6	90.6	90.6	90.8	91.1	91.1	91.2	91.2	91.2	91.3
≥ 1500	53.5	86.2	88.7	90.5	91.1	91.1	91.3	91.3	91.3	91.5	91.7	91.7	91.8	91.8	91.9	92.0
≥ 1200	53.5	86.4	89.0	90.8	91.5	91.5	91.7	91.7	91.7	92.0	92.2	92.2	92.3	92.3	92.3	92.4
≥ 1000	53.5	86.9	89.4	91.3	92.0	92.1	92.3	92.3	92.3	92.5	92.7	92.7	92.9	92.9	92.9	93.0
≥ 900	53.7	87.6	90.3	92.2	93.1	93.3	93.5	93.5	93.5	93.8	94.0	94.0	94.1	94.1	94.1	94.2
≥ 800	53.8	87.9	90.6	92.5	93.6	93.8	94.1	94.1	94.1	94.4	94.6	94.6	94.7	94.7	94.8	94.9
≥ 700	53.9	88.0	90.9	93.1	94.2	94.5	94.8	94.8	94.8	95.1	95.3	95.3	95.4	95.4	95.4	95.6
≥ 600	53.9	88.5	91.5	94.0	95.1	95.4	95.7	95.8	95.8	96.1	96.3	96.3	96.4	96.4	96.5	96.6
≥ 500	53.9	88.6	91.8	94.4	95.8	96.0	96.2	96.5	96.5	96.8	97.0	97.0	97.1	97.1	97.1	97.2
≥ 400	54.0	88.9	92.2	94.8	96.2	96.6	97.2	97.5	97.5	97.8	98.0	98.0	98.1	98.1	98.2	98.3
≥ 300	54.0	89.0	92.3	94.9	96.4	96.8	97.5	97.9	97.9	98.3	98.5	98.5	98.6	98.6	98.7	98.8
≥ 200	54.0	89.0	92.3	95.0	96.5	96.8	97.8	98.3	98.3	98.7	99.0	99.0	99.3	99.3	99.4	99.6
≥ 100	54.0	89.0	92.3	95.0	96.5	96.8	97.8	98.3	98.3	98.7	99.0	99.0	99.3	99.3	99.5	99.6
0	54.0	89.0	92.3	95.0	96.5	96.8	97.8	98.3	98.3	98.7	99.0	99.0	99.3	99.3	99.5	100.0

TOTAL NUMBER OF OBSERVATIONS 1889

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	33.8	57.1	59.8	61.5	62.6	62.6	63.2	63.5	63.5	64.4	64.7	64.7	65.3	65.4	66.1	66.3
≥ 20000	37.2	63.1	66.0	67.8	68.9	69.0	69.5	69.8	69.9	70.8	71.2	71.2	71.9	72.0	72.6	72.9
≥ 18000	37.2	63.3	66.2	67.9	69.1	69.2	69.7	70.0	70.1	71.0	71.4	71.4	72.0	72.2	72.8	73.1
≥ 16000	37.5	63.6	66.5	68.3	69.4	69.5	70.0	70.3	70.4	71.3	71.7	71.7	72.3	72.5	73.1	73.4
≥ 14000	38.1	64.6	67.6	69.4	70.5	70.6	71.1	71.4	71.5	72.4	72.8	72.8	73.4	73.6	74.2	74.5
≥ 12000	38.8	66.3	69.4	71.1	72.3	72.3	72.9	73.2	73.2	74.2	74.6	74.6	75.2	75.4	76.0	76.3
≥ 10000	39.7	69.2	72.4	74.1	75.3	75.3	75.9	76.2	76.2	77.2	77.6	77.6	78.3	78.4	79.0	79.3
≥ 9000	39.8	69.5	72.7	74.4	75.6	75.7	76.2	76.5	76.6	77.5	77.9	77.9	78.6	78.7	79.4	79.6
≥ 8000	41.0	71.4	74.6	76.4	77.6	77.6	78.1	78.5	78.5	79.5	79.9	79.9	80.6	80.7	81.4	81.6
≥ 7000	41.4	72.3	75.6	77.4	78.6	78.6	79.2	79.5	79.5	80.5	81.0	81.0	81.6	81.8	82.4	82.7
≥ 6000	41.5	72.7	76.0	77.8	79.0	79.0	79.6	79.9	79.9	81.0	81.4	81.4	82.1	82.2	82.9	83.1
≥ 5000	42.0	73.4	76.9	78.7	79.9	79.9	80.5	80.8	80.8	81.9	82.3	82.3	83.0	83.1	83.8	84.0
≥ 4500	42.2	74.2	77.7	79.5	80.7	80.7	81.3	81.6	81.6	82.6	83.1	83.1	83.8	83.9	84.6	84.8
≥ 4000	42.4	74.7	78.1	80.0	81.2	81.2	81.7	82.1	82.1	83.1	83.5	83.5	84.2	84.4	85.0	85.3
≥ 3500	42.6	75.1	78.6	80.5	81.6	81.7	82.2	82.5	82.6	83.6	84.0	84.0	84.7	84.9	85.6	85.8
≥ 3000	43.0	76.3	79.8	81.7	82.9	82.9	83.4	83.8	83.8	84.8	85.2	85.2	85.9	86.1	86.8	87.1
≥ 2500	43.2	77.1	80.7	82.7	83.9	83.9	84.4	84.8	84.8	85.8	86.2	86.2	86.9	87.1	87.8	88.1
≥ 2000	43.5	78.3	82.0	84.0	85.2	85.2	85.8	86.1	86.1	87.1	87.6	87.6	88.3	88.4	89.2	89.4
≥ 1800	43.5	78.5	82.2	84.2	85.4	85.5	86.1	86.4	86.5	87.5	87.9	87.9	88.6	88.7	89.5	89.7
≥ 1500	43.5	78.8	82.5	84.6	85.9	86.0	86.6	86.9	86.9	87.9	88.4	88.4	89.0	89.2	89.9	90.2
≥ 1200	43.7	79.0	82.9	85.0	86.3	86.3	87.1	87.4	87.5	88.5	88.9	88.9	89.6	89.7	90.5	90.7
≥ 1000	43.8	80.0	83.9	86.1	87.7	87.7	88.4	88.7	88.7	89.7	90.2	90.2	90.8	91.0	91.7	92.0
≥ 900	43.8	81.0	85.0	87.2	88.8	88.9	89.5	89.8	89.9	90.9	91.3	91.3	92.1	92.2	93.0	93.2
≥ 800	43.9	81.5	85.6	87.9	89.5	89.5	90.2	90.5	90.5	91.5	92.0	92.0	92.7	92.9	93.6	93.9
≥ 700	43.9	82.0	86.2	88.7	90.3	90.3	91.0	91.3	91.3	92.3	92.8	92.8	93.5	93.7	94.4	94.7
≥ 600	44.0	82.7	86.9	89.7	91.3	91.3	92.0	92.3	92.3	93.3	93.8	93.8	94.5	94.7	95.4	95.7
≥ 500	44.0	83.0	87.3	90.2	92.0	92.1	92.8	93.1	93.1	94.2	94.6	94.6	95.3	95.5	96.2	96.5
≥ 400	44.1	83.3	87.6	90.7	92.6	92.7	93.7	94.1	94.1	95.2	95.7	95.7	96.4	96.6	97.3	97.6
≥ 300	44.1	83.3	87.6	90.7	92.6	92.8	93.8	94.3	94.3	95.5	95.9	95.9	96.7	96.8	97.6	97.9
≥ 200	44.1	83.3	87.7	90.8	92.9	93.0	94.1	94.7	94.8	96.2	96.7	96.7	97.5	97.7	98.6	99.1
≥ 100	44.1	83.3	87.7	90.8	92.9	93.0	94.1	94.7	94.8	96.2	96.8	96.8	97.8	97.9	98.9	99.6
≥ 0	44.1	83.3	87.7	90.8	92.9	93.0	94.1	94.7	94.8	96.2	96.8	96.8	97.8	97.9	99.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM XX 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	>1¼	≥1¼	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	27.4	48.7	51.7	53.1	54.5	54.6	55.2	55.5	55.6	56.3	56.5	56.8	56.9	56.9	57.4	57.8
≥ 20000	30.7	54.9	58.5	60.1	61.8	61.9	62.6	62.9	63.0	63.8	64.1	64.1	64.5	64.5	65.1	65.4
≥ 18000	30.9	55.3	58.8	60.5	62.1	62.2	62.9	63.3	63.4	64.2	64.5	64.5	64.8	64.9	65.4	65.8
≥ 16000	31.0	55.4	58.9	60.5	62.2	62.3	63.0	63.4	63.5	64.2	64.5	64.5	64.9	64.9	65.5	65.8
≥ 14000	32.4	57.6	61.2	62.9	64.6	64.7	65.5	65.9	65.9	66.8	67.1	67.1	67.5	67.5	68.0	68.4
≥ 12000	33.2	60.2	63.9	65.6	67.4	67.5	68.4	68.8	68.9	69.7	70.0	70.0	70.4	70.5	71.0	71.3
≥ 10000	34.7	63.2	67.1	69.0	71.0	71.1	72.0	72.3	72.4	73.2	73.6	73.6	74.0	74.1	74.6	74.9
≥ 9000	34.8	63.7	67.7	69.7	71.6	71.8	72.6	73.0	73.1	73.9	74.3	74.3	74.7	74.7	75.3	75.6
≥ 8000	35.4	65.8	70.0	72.2	74.1	74.3	75.3	75.7	75.8	76.6	77.0	77.0	77.4	77.4	77.9	78.3
≥ 7000	35.9	67.3	71.5	73.8	75.7	75.9	76.9	77.3	77.4	78.2	78.6	78.6	79.0	79.0	79.5	79.9
≥ 6000	36.1	67.6	72.0	74.2	76.3	76.5	77.6	77.9	78.0	78.9	79.2	79.2	79.6	79.7	80.2	80.6
≥ 5000	36.1	68.1	72.5	74.8	77.0	77.2	78.2	78.6	78.7	79.5	79.9	79.9	80.3	80.4	80.9	81.3
≥ 4500	36.4	68.9	73.3	75.7	77.9	78.1	79.1	79.5	79.6	80.5	80.8	80.8	81.2	81.3	81.8	82.2
≥ 4000	36.9	69.9	74.3	77.1	79.3	79.5	80.6	81.0	81.1	82.0	82.3	82.3	82.7	82.8	83.3	83.7
≥ 3500	37.2	71.7	75.5	78.0	80.3	80.6	81.6	82.0	82.1	83.0	83.4	83.4	83.8	83.8	84.3	84.7
≥ 3000	37.6	71.3	76.2	78.8	81.1	81.4	82.4	82.8	82.9	83.8	84.2	84.2	84.6	84.6	85.2	85.6
≥ 2500	37.9	72.2	77.3	79.9	82.3	82.6	83.6	84.0	84.1	85.0	85.4	85.4	85.8	85.8	86.3	86.8
≥ 2000	38.1	73.2	78.4	81.0	83.4	83.7	84.7	85.1	85.2	86.1	86.4	86.4	86.9	86.9	87.4	87.8
≥ 1800	38.5	73.7	78.8	81.4	83.9	84.1	85.2	85.6	85.7	86.5	86.9	86.9	87.3	87.4	87.9	88.3
≥ 1500	38.7	74.1	79.3	82.0	84.4	84.6	85.7	86.1	86.2	87.1	87.5	87.5	87.9	87.9	88.5	88.9
≥ 1200	38.9	74.7	79.9	82.6	85.1	85.3	86.3	86.8	86.9	87.8	88.1	88.1	88.6	88.6	89.1	89.5
≥ 1000	39.3	76.1	81.5	84.4	86.8	87.1	88.1	88.5	88.6	89.5	89.9	89.9	90.3	90.4	90.9	91.3
≥ 900	39.4	77.1	82.7	85.6	88.1	88.4	89.4	89.8	89.9	90.8	91.2	91.2	91.6	91.6	92.2	92.6
≥ 800	39.5	77.6	83.5	86.5	89.0	89.3	90.3	90.7	90.8	91.8	92.1	92.1	92.5	92.6	93.1	93.5
≥ 700	39.6	78.1	84.4	87.4	90.2	90.4	91.4	92.0	92.1	93.0	93.4	93.4	93.8	93.8	94.3	94.7
≥ 600	39.8	78.5	84.9	88.0	90.8	91.1	92.2	92.7	92.8	93.8	94.2	94.2	94.6	94.6	95.2	95.6
≥ 500	39.9	78.9	85.4	88.6	91.6	92.0	93.1	93.7	93.8	94.8	95.2	95.2	95.7	95.8	96.3	96.8
≥ 400	39.9	79.0	85.5	88.7	92.1	92.4	93.8	94.3	94.4	95.6	96.0	96.0	96.5	96.6	97.1	97.6
≥ 300	39.9	79.0	85.5	88.8	92.4	92.7	94.1	94.8	95.1	96.3	96.8	96.8	97.3	97.4	98.0	98.6
≥ 200	39.9	79.1	85.6	88.9	92.5	92.9	94.3	95.1	95.3	96.7	97.2	97.2	97.8	97.8	98.6	99.1
≥ 100	39.9	79.1	85.6	88.9	92.5	92.9	94.3	95.1	95.3	96.8	97.3	97.4	98.0	98.1	98.9	99.6
≥ 0	39.9	79.1	85.6	88.9	92.5	92.9	94.3	95.1	95.3	96.8	97.3	97.4	98.0	98.1	98.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1910

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	39.9	53.8	54.0	54.4	54.4	54.5	54.5	54.6	54.6	54.6	54.6	54.6	54.6	54.6	54.6	54.6
≥ 20000	45.7	62.1	62.4	62.8	62.8	62.8	62.9	62.9	62.9	62.9	63.0	63.0	63.0	63.0	63.0	63.0
≥ 18000	46.0	62.4	62.7	63.0	63.0	63.1	63.1	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2
≥ 16000	46.0	62.5	62.8	63.2	63.2	63.2	63.3	63.3	63.3	63.3	63.4	63.4	63.4	63.4	63.4	63.4
≥ 14000	46.9	63.8	64.1	64.4	64.4	64.5	64.5	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6
≥ 12000	47.9	65.6	66.0	66.4	66.4	66.5	66.6	66.6	66.6	66.6	66.7	66.7	66.7	66.7	66.7	66.7
≥ 10000	49.2	67.9	68.4	68.9	68.9	69.0	69.1	69.1	69.1	69.1	69.2	69.2	69.2	69.2	69.2	69.2
≥ 9000	50.0	69.3	69.9	70.4	70.5	70.5	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 8000	50.8	70.9	71.5	72.1	72.2	72.2	72.4	72.4	72.4	72.4	72.4	72.5	72.5	72.5	72.5	72.5
≥ 7000	51.1	71.7	72.4	72.9	73.1	73.1	73.3	73.3	73.3	73.3	73.4	73.4	73.4	73.4	73.4	73.4
≥ 6000	51.4	72.7	73.4	74.0	74.1	74.1	74.3	74.3	74.3	74.3	74.4	74.4	74.4	74.4	74.4	74.4
≥ 5000	51.9	73.9	74.7	75.2	75.4	75.4	75.6	75.7	75.7	75.7	75.8	75.8	75.8	75.8	75.8	75.8
≥ 4500	52.0	74.3	75.2	75.8	76.0	76.1	76.3	76.3	76.3	76.3	76.4	76.4	76.4	76.4	76.4	76.4
≥ 4000	52.4	75.1	76.1	76.7	76.9	77.0	77.2	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3
≥ 3500	53.6	76.7	77.7	78.3	78.6	78.7	79.0	79.0	79.0	79.0	79.1	79.1	79.1	79.1	79.1	79.1
≥ 3000	55.4	79.2	80.3	81.0	81.3	81.4	81.6	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7
≥ 2500	57.6	82.4	83.6	84.5	84.8	84.9	85.2	85.2	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 2000	59.3	85.3	86.6	87.6	87.9	88.0	88.3	88.3	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4
≥ 1800	59.8	86.1	87.5	88.5	88.8	88.9	89.3	89.3	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 1500	60.7	88.0	89.5	90.5	90.8	90.9	91.2	91.3	91.3	91.3	91.4	91.4	91.4	91.4	91.4	91.4
≥ 1200	61.3	89.3	90.8	91.9	92.3	92.4	92.7	92.8	92.8	92.8	92.9	92.9	92.9	92.9	92.9	92.9
≥ 1000	61.5	90.5	92.4	93.6	94.0	94.1	94.5	94.5	94.6	94.7	94.8	94.8	94.8	94.8	94.8	94.8
≥ 900	61.6	91.1	93.3	94.6	95.1	95.2	95.6	95.7	95.7	95.8	95.9	95.9	95.9	95.9	95.9	95.9
≥ 800	61.7	91.7	94.0	95.4	96.2	96.3	96.7	96.8	96.8	96.9	97.0	97.0	97.0	97.0	97.0	97.0
≥ 700	61.8	92.0	94.3	95.9	96.9	97.0	97.6	97.6	97.7	97.8	97.9	97.9	97.9	97.9	97.9	97.9
≥ 600	61.8	92.1	94.5	96.2	97.4	97.6	98.1	98.2	98.3	98.4	98.5	98.5	98.5	98.5	98.5	98.5
≥ 500	61.8	92.2	94.5	96.4	97.6	97.8	98.4	98.6	98.7	98.9	99.0	99.0	99.0	99.0	99.0	99.0
≥ 400	61.8	92.2	94.5	96.4	97.7	98.1	98.7	99.0	99.0	99.3	99.4	99.5	99.5	99.5	99.5	99.5
≥ 300	61.8	92.2	94.5	96.4	97.8	98.2	98.9	99.2	99.3	99.7	99.9	99.9	100.0	100.0	100.0	100.0
≥ 200	61.8	92.2	94.5	96.4	97.8	98.2	98.9	99.2	99.3	99.7	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	61.8	92.2	94.5	96.4	97.8	98.2	98.9	99.2	99.3	99.7	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	61.8	92.2	94.5	96.4	97.8	98.2	98.9	99.2	99.3	99.7	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1963

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	45.7	53.9	54.0	54.0	54.0	54.0	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1
≥ 20000	52.6	62.8	62.9	62.9	62.9	62.9	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0
≥ 18000	52.7	62.9	63.0	63.0	63.0	63.0	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
≥ 16000	52.7	63.2	63.2	63.2	63.2	63.2	63.3	63.3	63.3	63.4	63.4	63.4	63.4	63.4	63.4	63.4
≥ 14000	53.4	64.2	64.2	64.2	64.2	64.2	64.3	64.3	64.3	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 12000	55.1	66.2	66.2	66.2	66.2	66.2	66.3	66.3	66.3	66.4	66.4	66.4	66.4	66.4	66.4	66.4
≥ 10000	56.4	68.1	68.2	68.2	68.3	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 9000	56.7	68.8	68.9	68.9	69.0	69.0	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 8000	57.6	70.4	70.5	70.5	70.6	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 7000	58.1	70.9	71.1	71.1	71.1	71.1	71.2	71.2	71.2	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 6000	58.6	72.0	72.3	72.3	72.4	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 5000	59.7	73.8	74.0	74.1	74.2	74.2	74.3	74.3	74.3	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 4500	60.6	74.8	75.1	75.2	75.3	75.3	75.4	75.4	75.4	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 4000	62.5	77.5	77.8	77.9	78.0	78.0	78.1	78.1	78.1	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 3500	64.7	80.5	80.8	80.8	80.9	80.9	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 3000	67.8	85.2	85.6	85.6	85.8	85.8	85.9	85.9	85.9	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 2500	69.6	88.9	89.5	89.5	89.7	89.8	90.0	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 2000	71.0	91.4	92.1	92.2	92.4	92.4	92.7	92.7	92.7	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 1800	71.3	92.1	92.7	92.8	93.1	93.2	93.4	93.5	93.5	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 1500	71.6	93.5	94.1	94.3	94.6	94.7	95.0	95.1	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 1200	71.8	94.8	95.7	96.0	96.3	96.4	96.7	96.7	96.7	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 1000	71.8	95.2	96.2	96.6	97.1	97.2	97.5	97.6	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 900	71.8	95.5	96.5	97.1	97.6	97.7	98.0	98.1	98.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 800	71.8	95.7	96.8	97.5	98.0	98.1	98.4	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 700	71.8	95.7	96.9	97.6	98.2	98.3	98.7	98.8	98.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 600	71.8	95.8	96.9	97.7	98.4	98.5	98.9	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 500	71.8	95.8	96.9	97.7	98.5	98.6	99.0	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400	71.8	95.8	96.9	97.7	98.7	98.8	99.3	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 300	71.8	95.9	97.0	97.8	98.8	98.9	99.4	99.5	99.5	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	71.8	95.9	97.0	97.8	98.8	98.9	99.4	99.5	99.5	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	71.8	95.9	97.0	97.8	98.8	98.9	99.4	99.5	99.5	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	71.8	95.9	97.0	97.8	98.8	98.9	99.4	99.5	99.5	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1964

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	48.3	55.6	55.6	55.7	55.8	55.8	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9
≥ 20000	57.6	67.3	67.3	67.5	67.5	67.6	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 18000	57.7	67.4	67.4	67.6	67.6	67.7	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8
≥ 16000	58.0	67.7	67.7	67.9	67.9	68.0	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 14000	59.4	69.5	69.5	69.7	69.7	69.8	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 12000	61.0	71.9	71.9	72.1	72.3	72.3	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 10000	62.6	74.1	74.1	74.3	74.5	74.6	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 9000	63.0	75.0	75.1	75.2	75.5	75.6	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 8000	64.3	77.2	77.3	77.4	77.7	77.7	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 7000	65.0	78.5	78.6	78.8	79.1	79.2	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3
≥ 6000	65.8	79.7	79.9	80.1	80.4	80.5	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 5000	66.8	81.2	81.4	81.6	81.9	81.9	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 4500	67.3	82.3	82.5	82.7	83.0	83.0	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2
≥ 4000	69.2	85.0	85.2	85.5	85.8	85.8	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 3500	70.1	86.4	86.6	87.0	87.4	87.4	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6
≥ 3000	71.3	89.0	89.3	89.6	90.1	90.2	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4
≥ 2500	72.3	90.4	90.9	91.3	91.9	92.0	92.2	92.2	92.2	92.3	92.3	92.3	92.3	92.3	92.3	92.3
≥ 2000	72.9	92.2	92.9	93.3	93.9	94.0	94.2	94.2	94.2	94.3	94.3	94.3	94.3	94.3	94.3	94.3
≥ 1800	73.1	92.6	93.2	93.7	94.3	94.4	94.6	94.6	94.6	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 1500	73.2	93.6	94.4	94.9	95.5	95.6	95.8	95.9	95.9	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1200	73.3	94.4	95.5	96.0	96.7	96.8	97.1	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1000	73.4	94.8	96.0	96.5	97.3	97.5	97.8	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 900	73.5	95.3	96.7	97.2	98.0	98.2	98.5	98.6	98.6	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 800	73.5	95.3	96.8	97.3	98.1	98.3	98.6	98.7	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 700	73.5	95.3	96.8	97.4	98.3	98.5	98.8	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 600	73.5	95.5	97.1	97.8	98.7	98.9	99.2	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 500	73.5	95.5	97.1	97.8	98.7	98.9	99.2	99.3	99.3	99.4	99.5	99.5	99.5	99.5	99.5	99.5
≥ 400	73.5	95.6	97.2	98.0	98.9	99.1	99.4	99.5	99.5	99.6	99.7	99.7	99.8	99.8	99.8	99.8
≥ 300	73.5	95.6	97.3	98.1	99.0	99.2	99.5	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	73.5	95.6	97.3	98.1	99.0	99.2	99.5	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100	73.5	95.6	97.3	98.1	99.0	99.2	99.5	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	100.0
≥ 0	73.5	95.6	97.3	98.1	99.0	99.2	99.5	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1939

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	48.9	50.1	58.3	58.4	58.5	58.5	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6
≥ 20000	58.4	71.4	71.7	71.9	72.0	72.0	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 18000	58.6	71.6	72.0	72.1	72.2	72.2	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 16000	58.9	72.1	72.4	72.5	72.6	72.6	72.7	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8
≥ 14000	59.7	73.5	73.9	74.0	74.1	74.1	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 12000	60.7	75.5	75.8	76.0	76.1	76.1	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 10000	62.8	79.2	79.5	79.7	79.8	79.8	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 9000	63.8	80.4	80.8	81.0	81.1	81.1	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 8000	64.9	82.0	82.4	82.6	82.7	82.7	82.8	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9
≥ 7000	65.7	83.3	83.9	84.0	84.1	84.1	84.2	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3
≥ 6000	66.1	84.1	84.7	84.8	84.9	84.9	85.0	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.1
≥ 5000	66.5	84.8	85.3	85.6	85.7	85.7	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 4500	66.8	85.3	85.9	86.2	86.3	86.3	86.4	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5
≥ 4000	67.2	86.3	86.9	87.2	87.4	87.4	87.5	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6
≥ 3500	67.4	86.9	87.5	87.9	88.4	88.4	88.5	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6
≥ 3000	67.9	88.0	88.7	89.3	89.8	89.8	89.9	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 2500	68.4	89.4	90.2	90.7	91.3	91.3	91.4	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5
≥ 2000	68.9	90.7	91.9	92.4	92.9	92.9	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 1800	69.0	91.1	92.2	92.8	93.3	93.3	93.4	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 1500	69.0	91.6	92.9	93.5	94.2	94.2	94.3	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 1200	69.2	92.7	94.1	95.0	95.7	95.7	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1000	69.3	93.2	94.7	95.6	96.2	96.2	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 900	69.4	93.6	95.0	96.1	96.9	96.9	97.1	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 800	69.4	93.8	95.4	96.7	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 700	69.4	93.9	95.6	96.8	97.6	97.6	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 600	69.4	94.2	95.9	97.2	98.1	98.2	98.5	98.5	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 500	69.4	94.3	96.0	97.4	98.4	98.4	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 400	69.4	94.3	96.1	97.4	98.6	98.6	98.9	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 300	69.4	94.3	96.1	97.5	98.8	98.8	99.3	99.3	99.4	99.7	99.7	99.7	99.8	99.8	99.8	99.8
≥ 200	69.4	94.3	96.1	97.5	98.8	98.8	99.3	99.3	99.4	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 100	69.4	94.3	96.1	97.5	98.8	98.8	99.3	99.3	99.4	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 0	69.4	94.3	96.1	97.5	98.8	98.8	99.3	99.3	99.4	99.8	99.8	99.8	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	50.3	66.5	67.2	68.0	68.3	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 20000	54.7	73.4	74.4	75.3	75.6	75.6	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 18000	54.7	73.4	74.4	75.3	75.6	75.6	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 16000	55.0	73.8	74.8	75.7	75.9	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.1
≥ 14000	55.5	75.0	76.0	76.9	77.1	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.3
≥ 12000	56.2	76.6	77.6	78.5	78.7	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.9
≥ 10000	57.8	79.5	80.6	81.5	81.7	81.8	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9
≥ 9000	58.7	80.8	82.1	83.0	83.3	83.3	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4
≥ 8000	59.8	82.9	84.3	85.2	85.4	85.5	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6
≥ 7000	60.7	84.3	85.8	86.7	87.0	87.0	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1
≥ 6000	61.4	85.3	86.9	87.8	88.0	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.2
≥ 5000	61.7	85.9	87.4	88.3	88.6	88.6	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 4500	61.8	86.1	87.7	88.6	88.8	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	89.0
≥ 4000	62.3	87.1	88.7	89.6	89.9	89.9	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.1
≥ 3500	62.5	87.6	89.2	90.1	90.4	90.4	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5
≥ 3000	62.7	87.9	89.6	90.5	90.7	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.9
≥ 2500	63.1	88.8	90.7	91.6	91.9	91.9	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0
≥ 2000	63.5	89.9	91.9	92.9	93.2	93.2	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.4
≥ 1800	63.6	90.1	92.0	93.0	93.3	93.3	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.5
≥ 1500	63.7	90.8	92.9	94.0	94.3	94.3	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.5
≥ 1200	63.8	91.4	93.6	94.7	95.0	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 1000	64.0	91.6	93.9	95.1	95.7	95.7	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.9
≥ 900	64.0	92.0	94.3	95.6	96.3	96.3	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 800	64.0	92.6	94.9	96.2	97.0	97.0	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.2
≥ 700	64.1	92.8	95.1	96.6	97.4	97.4	97.5	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 600	64.1	92.9	95.3	96.9	97.7	97.8	97.9	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.2
≥ 500	64.1	93.0	95.6	97.3	98.2	98.3	98.4	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.7
≥ 400	64.1	93.0	95.7	97.4	98.4	98.4	98.6	98.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.0
≥ 300	64.1	93.0	95.8	97.5	98.5	98.6	99.0	99.2	99.3	99.6	99.6	99.6	99.6	99.6	99.6	99.7
≥ 200	64.1	93.0	95.8	97.5	98.5	98.6	99.1	99.3	99.4	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 100	64.1	93.0	95.8	97.5	98.5	98.6	99.1	99.3	99.4	99.8	99.8	99.8	99.9	99.9	99.9	99.9
0	64.1	93.0	95.8	97.5	98.5	98.6	99.1	99.3	99.4	99.8	99.8	99.8	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	39.4	64.3	66.8	67.8	68.6	68.6	68.9	69.0	69.0	69.2	69.2	69.2	69.3	69.4	69.6	69.8
≥ 20000	41.7	69.7	72.3	73.3	74.1	74.1	74.4	74.6	74.6	74.8	74.8	74.8	74.9	74.9	75.2	75.3
≥ 18000	41.8	69.9	72.4	73.5	74.2	74.2	74.6	74.7	74.7	74.9	74.9	74.9	75.0	75.1	75.3	75.5
≥ 16000	41.9	70.0	72.5	73.6	74.3	74.3	74.7	74.8	74.8	75.0	75.0	75.0	75.1	75.2	75.4	75.6
≥ 14000	42.8	71.6	74.2	75.3	76.0	76.0	76.4	76.5	76.5	76.7	76.7	76.7	76.8	76.9	77.1	77.3
≥ 12000	44.1	74.0	76.7	77.8	78.5	78.5	78.8	79.0	79.0	79.2	79.2	79.2	79.3	79.3	79.6	79.7
≥ 10000	45.2	76.1	78.9	80.0	80.8	80.8	81.2	81.3	81.3	81.5	81.5	81.5	81.6	81.7	81.9	82.1
≥ 9000	45.5	76.7	79.6	80.7	81.5	81.5	81.9	82.0	82.0	82.2	82.2	82.2	82.3	82.3	82.6	82.7
≥ 8000	46.3	78.7	81.6	82.8	83.7	83.7	84.0	84.2	84.2	84.4	84.4	84.4	84.4	84.5	84.7	84.9
≥ 7000	46.8	79.8	82.7	83.9	84.8	84.8	85.1	85.3	85.3	85.5	85.5	85.5	85.6	85.6	85.9	86.0
≥ 6000	47.4	80.9	83.9	85.1	86.0	86.0	86.3	86.5	86.5	86.7	86.7	86.7	86.7	86.8	87.0	87.2
≥ 5000	47.7	81.5	84.6	85.8	86.7	86.7	87.1	87.2	87.2	87.4	87.4	87.4	87.5	87.6	87.8	88.0
≥ 4500	48.1	82.1	85.2	86.4	87.3	87.3	87.7	87.8	87.8	88.0	88.0	88.0	88.1	88.2	88.4	88.6
≥ 4000	48.4	82.9	86.3	87.5	88.6	88.6	88.9	89.0	89.0	89.2	89.2	89.2	89.3	89.4	89.6	89.8
≥ 3500	48.5	83.2	86.5	87.8	88.8	88.8	89.1	89.3	89.3	89.5	89.5	89.5	89.6	89.6	89.9	90.0
≥ 3000	48.9	84.1	87.5	88.9	89.9	89.9	90.3	90.4	90.4	90.6	90.6	90.6	90.7	90.8	91.0	91.1
≥ 2500	49.2	85.0	88.6	90.1	91.2	91.2	91.5	91.7	91.7	91.9	91.9	91.9	92.0	92.0	92.3	92.4
≥ 2000	49.6	86.2	89.9	91.4	92.6	92.6	93.0	93.2	93.2	93.4	93.4	93.4	93.5	93.5	93.8	93.9
≥ 1800	49.6	86.4	90.1	91.7	92.8	92.9	93.3	93.4	93.4	93.6	93.6	93.6	93.7	93.8	94.0	94.2
≥ 1500	50.1	87.2	91.1	92.7	93.8	93.8	94.2	94.4	94.5	94.7	94.7	94.7	94.8	94.9	95.1	95.3
≥ 1200	50.4	87.7	91.8	93.5	94.6	94.7	95.1	95.3	95.3	95.5	95.6	95.6	95.6	95.7	95.9	96.1
≥ 1000	50.4	88.1	92.2	93.9	95.1	95.1	95.5	95.7	95.7	95.9	96.0	96.0	96.1	96.1	96.4	96.5
≥ 900	50.5	88.4	92.5	94.3	95.4	95.5	95.9	96.1	96.1	96.3	96.4	96.4	96.5	96.5	96.8	96.9
≥ 800	50.5	88.7	92.8	94.8	96.0	96.0	96.5	96.7	96.7	96.9	97.0	97.0	97.1	97.1	97.4	97.5
≥ 700	50.5	88.9	93.2	95.1	96.4	96.5	97.0	97.2	97.3	97.5	97.5	97.5	97.6	97.7	97.9	98.0
≥ 600	50.6	89.0	93.5	95.5	96.8	96.9	97.4	97.6	97.7	97.9	98.0	98.0	98.1	98.1	98.4	98.5
≥ 500	50.6	89.1	93.6	95.6	97.1	97.2	97.7	97.9	98.0	98.3	98.3	98.3	98.4	98.5	98.7	98.9
≥ 400	50.6	89.1	93.7	95.8	97.4	97.4	98.0	98.3	98.4	98.7	98.7	98.7	98.8	98.9	99.3	99.4
≥ 300	50.6	89.1	93.7	95.9	97.5	97.5	98.3	98.6	98.7	99.0	99.1	99.1	99.2	99.2	99.6	99.8
≥ 200	50.6	89.1	93.7	95.9	97.5	97.5	98.3	98.7	98.8	99.1	99.2	99.2	99.3	99.4	99.8	99.9
≥ 100	50.6	89.1	93.7	95.9	97.5	97.5	98.3	98.7	98.8	99.1	99.2	99.3	99.4	99.5	99.9	100.0
≥ 0	50.6	89.1	93.7	95.9	97.5	97.5	98.3	98.7	98.8	99.1	99.2	99.3	99.4	99.5	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 2045

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	29.4	56.6	60.4	62.2	64.0	64.4	65.7	65.9	66.0	66.8	67.2	67.2	67.6	67.6	68.1	68.5
≥ 20000	31.5	61.2	65.2	67.4	69.2	69.6	71.2	71.5	71.6	72.4	72.9	73.0	73.4	73.4	73.9	74.4
≥ 18000	31.6	61.4	65.3	67.5	69.4	69.8	71.3	71.6	71.8	72.5	73.1	73.1	73.6	73.6	74.1	74.5
≥ 16000	31.6	61.6	65.6	67.8	69.7	70.1	71.6	71.9	72.0	72.8	73.4	73.4	73.9	73.9	74.4	74.8
≥ 14000	32.2	62.5	66.7	68.9	70.8	71.2	72.8	73.1	73.2	74.0	74.5	74.6	75.0	75.0	75.6	76.0
≥ 12000	33.1	64.7	68.9	71.1	73.1	73.4	75.1	75.4	75.6	76.4	76.9	77.0	77.5	77.5	78.0	78.4
≥ 10000	34.2	67.3	71.8	74.1	76.1	76.5	78.1	78.4	78.6	79.4	79.9	80.0	80.5	80.5	81.0	81.4
≥ 9000	34.4	68.1	72.6	74.9	76.9	77.3	78.9	79.3	79.4	80.2	80.8	80.8	81.3	81.3	81.8	82.3
≥ 8000	35.2	69.3	73.8	76.1	78.2	78.6	80.3	80.6	80.8	81.6	82.2	82.3	82.8	82.8	83.3	83.7
≥ 7000	35.5	70.2	74.7	77.0	79.1	79.5	81.2	81.5	81.7	82.5	83.1	83.2	83.7	83.7	84.2	84.6
≥ 6000	36.1	71.1	75.7	78.2	80.3	80.7	82.4	82.8	82.9	83.7	84.4	84.4	84.9	84.9	85.5	85.9
≥ 5000	36.3	72.0	76.6	79.1	81.3	81.6	83.3	83.7	83.8	84.6	85.3	85.3	85.8	85.8	86.4	86.8
≥ 4500	36.5	72.3	77.0	79.5	81.6	82.0	83.7	84.1	34.2	85.0	85.7	85.7	86.2	86.2	86.8	87.2
≥ 4000	36.7	73.2	78.0	80.5	82.6	83.0	84.7	85.0	85.2	86.0	86.6	86.7	87.2	87.2	87.7	88.2
≥ 3500	36.7	73.5	78.3	80.9	83.0	83.4	85.1	85.4	85.6	86.4	87.1	87.1	87.6	87.6	88.2	88.6
≥ 3000	36.7	73.7	78.6	81.3	83.5	83.9	85.6	85.9	86.0	86.9	87.5	87.6	88.1	88.1	88.7	89.1
≥ 2500	37.0	74.5	79.4	82.1	84.3	84.7	86.4	86.7	86.9	87.7	88.4	88.4	88.9	88.9	89.5	89.9
≥ 2000	37.3	75.1	80.0	82.8	84.9	85.3	87.0	87.4	87.5	88.4	89.1	89.1	89.6	89.6	90.2	90.6
≥ 1800	37.3	75.2	80.1	82.8	85.0	85.4	87.1	87.5	87.6	88.5	89.1	89.2	89.7	89.7	90.3	90.7
≥ 1500	37.6	76.3	81.4	84.1	86.3	86.8	88.5	88.9	89.0	90.0	90.6	90.6	91.1	91.1	91.7	92.2
≥ 1200	37.7	77.0	82.3	85.0	87.2	87.7	89.4	89.8	89.9	90.9	91.6	91.6	92.1	92.1	92.7	93.2
≥ 1000	37.9	77.8	83.2	86.0	88.2	88.8	90.6	90.9	91.1	92.1	92.7	92.8	93.3	93.3	93.9	94.3
≥ 900	37.9	78.0	83.6	86.4	88.7	89.2	91.0	91.3	91.5	92.6	93.3	93.3	93.8	93.8	94.4	94.9
≥ 800	37.9	78.2	84.1	87.1	89.3	89.9	91.6	92.0	92.2	93.3	93.9	94.0	94.5	94.5	95.1	95.5
≥ 700	38.0	78.7	84.6	87.9	90.2	90.8	92.5	92.9	93.1	94.2	94.9	94.9	95.4	95.4	96.0	96.5
≥ 600	38.0	78.9	85.0	88.3	90.6	91.3	93.0	93.4	93.6	94.7	95.4	95.4	95.9	95.9	96.6	97.0
≥ 500	38.0	79.0	85.1	88.4	90.9	91.5	93.3	93.8	94.0	95.1	95.8	95.9	96.4	96.4	97.0	97.5
≥ 400	38.0	79.2	85.3	88.6	91.1	91.8	93.8	94.2	94.4	95.7	96.4	96.5	96.9	96.9	97.6	98.1
≥ 300	38.0	79.3	85.4	88.7	91.3	92.0	94.0	94.5	94.8	96.1	96.9	96.9	97.5	97.5	98.3	98.7
≥ 200	38.0	79.3	85.4	88.7	91.3	92.1	94.1	94.7	95.0	96.5	97.2	97.2	97.8	97.8	98.6	99.1
≥ 100	38.0	79.3	85.4	88.7	91.3	92.1	94.1	94.7	95.0	96.5	97.2	97.3	97.9	97.9	98.8	99.4
≥ 0	38.0	79.3	85.4	88.7	91.3	92.1	94.1	94.7	95.0	96.5	97.2	97.3	97.9	98.0	98.8	100.0

TOTAL NUMBER OF OBSERVATIONS 2064

USAFETAC FORM AWS 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	25.4	46.8	50.7	52.5	54.4	54.8	56.1	56.5	56.8	57.5	57.8	57.8	57.9	57.9	58.2	58.7
≥ 20000	28.6	53.2	57.6	59.5	61.8	62.4	63.7	64.3	64.6	65.3	65.6	65.7	65.8	65.8	66.1	66.6
≥ 18000	28.8	53.5	57.9	59.9	62.1	62.7	64.0	64.6	64.9	65.7	65.9	66.0	66.1	66.1	66.4	66.9
≥ 16000	28.8	53.8	58.2	60.2	62.5	63.0	64.3	64.9	65.2	66.0	66.3	66.3	66.5	66.5	66.7	67.3
≥ 14000	29.6	54.9	59.5	61.4	63.8	64.4	65.8	66.3	66.7	67.5	67.8	67.9	68.0	68.0	68.3	68.8
≥ 12000	31.0	57.6	62.4	64.4	66.8	67.4	68.8	69.4	69.8	70.7	71.0	71.1	71.2	71.2	71.5	72.0
≥ 10000	32.7	60.5	65.8	67.8	70.3	70.9	72.4	73.0	73.5	74.3	74.6	74.7	74.8	74.8	75.1	75.6
≥ 9000	32.9	61.1	66.5	68.6	71.2	71.7	73.4	74.0	74.4	75.3	75.6	75.6	75.8	75.8	76.1	76.6
≥ 8000	33.6	62.7	68.2	70.4	72.9	73.5	75.2	75.9	76.3	77.1	77.5	77.5	77.7	77.7	78.0	78.5
≥ 7000	34.0	63.5	69.0	71.5	74.1	74.7	76.4	77.0	77.5	78.3	78.6	78.7	78.8	78.9	79.2	79.7
≥ 6000	34.5	64.7	70.3	72.8	75.4	76.0	77.7	78.3	78.7	79.6	80.0	80.0	80.2	80.2	80.5	81.0
≥ 5000	34.8	65.4	71.0	73.6	76.2	76.8	78.5	79.2	79.6	80.5	80.8	80.9	81.0	81.0	81.3	81.8
≥ 4500	34.8	65.4	71.1	73.7	76.2	76.9	78.6	79.3	79.7	80.6	81.0	81.0	81.1	81.2	81.5	82.0
≥ 4000	35.1	66.2	72.2	74.7	77.3	77.9	79.7	80.4	80.8	81.7	82.1	82.1	82.3	82.3	82.6	83.1
≥ 3500	35.4	66.5	72.5	75.1	77.8	78.4	80.1	80.8	81.2	82.2	82.5	82.5	82.7	82.7	83.0	83.5
≥ 3000	35.6	67.4	73.5	76.2	78.9	79.5	81.3	82.0	82.5	83.4	83.7	83.8	83.9	84.0	84.2	84.8
≥ 2500	36.0	68.2	74.5	77.2	79.9	80.6	82.4	83.1	83.5	84.5	84.8	84.9	85.0	85.0	85.3	85.8
≥ 2000	36.3	68.8	75.0	77.8	80.7	81.4	83.2	84.0	84.4	85.3	85.7	85.7	85.8	85.9	86.2	86.7
≥ 1800	36.4	69.2	75.5	78.2	81.1	81.8	83.7	84.5	84.9	85.8	86.2	86.2	86.4	86.4	86.7	87.2
≥ 1500	36.7	70.3	76.7	79.5	82.5	83.2	85.2	86.0	86.4	87.3	87.7	87.7	87.9	87.9	88.2	88.7
≥ 1200	37.2	71.2	77.7	80.6	83.6	84.3	86.4	87.2	87.6	88.5	88.9	88.9	89.0	89.1	89.4	89.9
≥ 1000	37.3	72.1	78.7	81.8	84.9	85.6	87.7	88.5	88.9	89.9	90.3	90.3	90.5	90.5	90.8	91.3
≥ 900	37.4	72.5	79.3	82.4	85.6	86.3	88.3	89.2	89.6	90.6	91.0	91.1	91.2	91.3	91.5	92.1
≥ 800	37.6	73.2	80.3	83.7	87.0	87.7	89.8	90.6	91.1	92.1	92.5	92.6	92.7	92.8	93.0	93.6
≥ 700	37.7	74.0	81.3	84.8	88.1	88.9	91.1	92.0	92.4	93.4	93.8	93.9	94.0	94.1	94.4	94.9
≥ 600	37.7	74.2	81.6	85.2	88.5	89.3	91.5	92.5	92.9	94.0	94.4	94.5	94.6	94.7	95.0	95.5
≥ 500	37.8	74.8	82.5	86.2	89.7	90.5	92.7	93.8	94.4	95.4	96.0	96.0	96.2	96.2	96.5	97.0
≥ 400	37.8	75.0	82.7	86.4	90.0	90.8	93.2	94.4	94.9	96.1	96.6	96.7	96.8	96.9	97.2	97.7
≥ 300	37.8	75.2	82.9	86.6	90.3	91.2	93.7	95.1	95.6	96.9	97.5	97.5	97.7	97.7	98.0	98.5
≥ 200	37.8	75.2	82.9	86.6	90.3	91.2	93.7	95.2	95.7	97.0	97.7	97.7	98.1	98.1	98.4	99.2
≥ 100	37.8	75.2	82.9	86.6	90.3	91.2	93.7	95.2	95.7	97.0	97.7	97.7	98.1	98.1	98.7	99.4
≥ 0	37.8	75.2	82.9	86.6	90.3	91.2	93.7	95.2	95.7	97.0	97.7	97.7	98.1	98.1	98.8	100.0

TOTAL NUMBER OF OBSERVATIONS 2126

USAFETAC FORM AUG 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	34.8	51.9	53.2	53.9	54.1	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2
≥ 20000	39.1	58.9	60.5	61.3	61.6	61.7	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8
≥ 18000	39.4	59.3	61.0	61.9	62.1	62.2	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3
≥ 16000	39.4	59.5	61.1	61.9	62.2	62.3	62.3	62.3	62.3	62.4	62.4	62.4	62.4	62.4	62.4	62.4
≥ 14000	40.1	60.6	62.1	63.0	63.4	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5
≥ 12000	40.9	62.1	63.7	64.6	65.0	65.1	65.1	65.1	65.1	65.2	65.2	65.2	65.2	65.2	65.2	65.2
≥ 10000	42.3	64.3	65.9	66.8	67.3	67.4	67.5	67.5	67.5	67.6	67.6	67.6	67.6	67.6	67.6	67.6
≥ 9000	42.9	65.0	66.7	67.5	68.1	68.2	68.3	68.3	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 8000	43.5	66.1	67.8	68.7	69.2	69.4	69.5	69.5	69.5	69.6	69.6	69.6	69.6	69.6	69.6	69.6
≥ 7000	43.9	67.2	69.0	69.8	70.4	70.5	70.6	70.6	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 6000	44.1	67.7	69.5	70.4	70.9	71.0	71.1	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 5000	44.4	68.2	70.0	70.9	71.4	71.6	71.7	71.7	71.7	71.8	71.8	71.8	71.8	71.8	71.8	71.8
≥ 4500	44.4	68.4	70.3	71.2	71.7	71.9	72.0	72.0	72.0	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 4000	45.0	69.2	71.1	72.0	72.5	72.7	72.8	72.8	72.8	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 3500	45.6	70.2	72.2	73.0	73.6	73.8	73.8	73.8	73.8	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 3000	48.4	74.1	76.2	77.4	78.0	78.1	78.2	78.2	78.2	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 2500	51.7	79.2	81.4	82.6	83.3	83.4	83.5	83.5	83.5	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 2000	53.9	82.9	85.2	86.6	87.3	87.6	87.8	87.9	87.9	88.0	88.0	88.0	88.0	88.0	88.0	88.0
≥ 1800	54.8	84.2	86.5	88.0	88.8	89.0	89.2	89.3	89.3	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 1500	56.3	86.5	88.9	90.6	91.4	91.7	91.9	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 1200	57.2	88.7	91.3	93.0	93.9	94.3	94.5	94.7	94.8	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 1000	57.7	89.7	92.5	94.2	95.1	95.5	95.9	96.1	96.1	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 900	57.9	90.0	92.9	94.7	95.6	96.0	96.4	96.6	96.7	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 800	57.9	90.4	93.4	95.2	96.2	96.6	97.0	97.2	97.3	97.4	97.5	97.5	97.5	97.5	97.5	97.5
≥ 700	58.0	90.9	93.9	95.8	96.9	97.3	97.8	98.0	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 600	58.0	91.1	94.1	96.1	97.4	97.7	98.3	98.5	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8
≥ 500	58.0	91.2	94.2	96.2	97.6	97.9	98.6	98.9	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 400	58.0	91.2	94.2	96.2	97.6	98.0	98.7	99.2	99.3	99.5	99.6	99.6	99.6	99.6	99.6	99.6
≥ 300	58.0	91.3	94.4	96.5	97.8	98.2	99.0	99.5	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	58.0	91.3	94.4	96.5	97.8	98.2	99.0	99.5	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	58.0	91.3	94.4	96.5	97.8	98.2	99.0	99.5	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	58.0	91.3	94.4	96.5	97.8	98.2	99.0	99.5	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2126

USAFETAC FORM AGE 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	38.6	51.2	51.7	51.9	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0
≥ 20000	44.4	59.5	60.1	60.3	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4
≥ 18000	44.6	59.8	60.4	60.6	60.6	60.6	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 16000	44.6	59.8	60.4	60.6	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 14000	45.5	60.9	61.5	61.7	61.8	61.8	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9
≥ 12000	46.5	62.5	63.1	63.5	63.6	63.6	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7
≥ 10000	47.8	64.6	65.3	65.6	65.7	65.7	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 9000	48.2	65.4	66.1	66.4	66.5	66.5	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6
≥ 8000	48.1	66.2	66.9	67.3	67.4	67.4	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 7000	49.2	67.2	68.0	68.3	68.4	68.4	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5
≥ 6000	49.5	67.6	68.5	68.8	69.0	69.0	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 5000	50.0	68.5	69.4	69.8	70.0	70.0	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 4500	50.8	69.5	70.5	70.9	71.0	71.0	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1
≥ 4000	52.6	72.2	73.2	73.5	73.7	73.7	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 3500	55.2	75.6	76.7	77.2	7	7.3	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 3000	59.7	82.4	83.6	84.1	84.	.3	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 2500	63.4	88.2	89.5	90.1	90.4	90.3	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4
≥ 2000	64.8	90.7	92.1	92.8	93.2	93.3	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 1800	64.9	91.4	92.9	93.5	93.9	94.0	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 1500	65.4	92.6	94.2	95.0	95.6	95.7	96.0	96.0	96.0	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 1200	65.5	93.3	95.1	96.1	96.9	97.1	97.4	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 1000	65.6	93.7	95.6	96.6	97.5	97.7	98.1	98.2	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 900	65.7	93.7	95.6	96.7	97.6	97.8	98.2	98.3	98.3	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 800	65.7	93.8	95.7	96.8	97.8	98.0	98.4	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 700	65.7	94.0	95.9	96.9	98.0	98.2	98.6	98.9	98.9	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 600	65.7	94.1	96.0	97.1	98.2	98.4	98.8	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 500	65.7	94.2	96.2	97.3	98.4	98.6	99.1	99.4	99.4	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400	65.7	94.3	96.3	97.4	98.7	98.9	99.3	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300	65.7	94.3	96.3	97.4	98.7	98.9	99.3	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	65.7	94.3	96.3	97.4	98.7	98.9	99.3	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	65.7	94.3	96.3	97.4	98.7	98.9	99.3	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	65.7	94.3	96.3	97.4	98.7	98.9	99.3	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2127

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	42.6	55.3	55.8	56.1	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3
≥ 20000	51.8	67.1	67.7	68.0	68.2	68.2	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 18000	52.1	67.5	68.1	68.5	68.6	68.6	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7
≥ 16000	52.2	67.7	68.2	68.6	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8
≥ 14000	53.0	68.7	69.3	69.7	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 12000	54.2	70.8	71.3	71.7	71.9	71.9	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0
≥ 10000	55.3	73.0	73.7	74.1	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3
≥ 9000	56.0	74.1	74.9	75.3	75.4	75.4	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 8000	56.7	75.5	76.3	76.7	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 7000	56.9	76.2	77.2	77.6	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 6000	57.1	76.8	77.8	78.2	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 5000	57.8	78.0	79.1	79.6	79.9	79.9	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
≥ 4500	58.4	79.0	80.1	80.6	80.9	80.9	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 4000	60.2	81.4	82.7	83.1	83.3	83.5	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 3500	61.7	84.1	85.4	85.9	86.3	86.3	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4
≥ 3000	63.6	87.3	88.8	89.4	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 2500	65.3	90.1	91.6	92.3	92.7	92.7	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 2000	65.9	91.3	92.9	93.5	94.0	94.0	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 1800	66.0	91.6	93.3	94.0	94.4	94.4	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 1500	66.4	92.4	94.3	95.3	95.9	96.0	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 1200	66.5	92.7	94.9	96.0	96.8	96.9	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1000	66.5	93.0	95.2	96.5	97.4	97.5	97.9	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 900	66.5	93.2	95.3	96.7	97.6	97.8	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 800	66.6	93.3	95.6	97.0	97.9	98.0	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 700	66.6	93.6	96.0	97.5	98.3	98.5	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 600	66.6	93.7	96.2	97.7	98.6	98.8	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 500	66.6	93.7	96.2	97.7	98.7	98.9	99.5	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400	66.6	93.7	96.3	97.9	99.0	99.1	99.7	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300	66.6	93.7	96.3	97.9	99.0	99.1	99.7	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	66.6	93.7	96.3	97.9	99.0	99.1	99.7	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	66.6	93.7	96.3	97.9	99.0	99.1	99.7	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	66.6	93.7	96.3	97.9	99.0	99.1	99.7	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2118

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	45.3	58.4	59.3	59.6	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7
≥ 20000	54.5	70.7	71.7	72.1	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 18000	54.8	71.4	72.4	72.8	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 16000	54.9	71.5	72.5	72.9	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0
≥ 14000	55.6	72.9	73.9	74.3	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 12000	57.1	74.9	75.9	76.3	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 10000	58.9	77.9	79.1	79.6	79.7	79.7	79.7	79.7	79.7	79.7	79.8	79.8	79.8	79.8	79.8	79.8
≥ 9000	59.5	78.8	80.0	80.4	80.6	80.6	80.6	80.6	80.6	80.6	80.7	80.7	80.7	80.7	80.7	80.7
≥ 8000	60.8	80.8	82.0	82.4	82.6	82.6	82.6	82.6	82.6	82.6	82.7	82.7	82.7	82.7	82.7	82.7
≥ 7000	61.5	82.2	83.3	83.8	84.1	84.1	84.1	84.1	84.1	84.1	84.2	84.2	84.2	84.2	84.2	84.2
≥ 6000	61.7	83.0	84.2	84.6	84.9	84.9	84.9	84.9	84.9	84.9	85.0	85.0	85.0	85.0	85.0	85.0
≥ 5000	61.9	84.2	85.5	86.1	86.3	86.3	86.3	86.3	86.4	86.4	86.5	86.5	86.5	86.5	86.5	86.5
≥ 4500	62.2	84.7	86.1	86.6	86.8	86.8	86.8	86.8	86.9	86.9	87.0	87.0	87.0	87.0	87.0	87.0
≥ 4000	62.5	85.6	87.0	87.6	87.9	87.9	87.9	87.9	87.9	87.9	88.0	88.0	88.0	88.0	88.0	88.0
≥ 3500	63.0	86.5	88.0	88.7	89.0	89.0	89.0	89.0	89.1	89.1	89.2	89.2	89.2	89.2	89.2	89.2
≥ 3000	63.8	88.0	89.7	90.4	90.8	90.8	90.8	90.9	91.0	91.0	91.1	91.1	91.1	91.1	91.1	91.1
≥ 2500	64.6	89.7	91.4	92.3	92.8	92.8	92.9	93.0	93.1	93.1	93.2	93.2	93.2	93.2	93.2	93.2
≥ 2000	65.0	90.6	92.5	93.3	94.0	94.0	94.0	94.1	94.2	94.3	94.4	94.4	94.4	94.4	94.4	94.4
≥ 1800	65.1	90.9	93.1	93.9	94.6	94.6	94.6	94.7	94.8	94.9	95.0	95.0	95.0	95.0	95.0	95.0
≥ 1500	65.3	91.8	94.3	95.2	96.0	96.0	96.0	96.2	96.3	96.4	96.5	96.5	96.5	96.5	96.5	96.5
≥ 1200	65.5	92.2	94.8	95.8	96.6	96.6	96.6	96.8	96.9	97.0	97.1	97.1	97.1	97.1	97.1	97.1
≥ 1000	65.6	93.1	95.8	96.8	97.7	97.8	97.9	98.0	98.1	98.3	98.4	98.4	98.4	98.4	98.4	98.4
≥ 900	65.6	93.3	96.1	97.1	98.1	98.2	98.3	98.4	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800	65.7	93.5	96.4	97.4	98.4	98.5	98.6	98.7	98.8	99.0	99.1	99.1	99.1	99.1	99.1	99.1
≥ 700	65.8	93.7	96.6	97.7	98.7	98.8	98.9	99.1	99.2	99.3	99.4	99.4	99.4	99.4	99.4	99.4
≥ 600	65.9	93.9	96.8	97.8	98.9	99.0	99.2	99.4	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500	65.9	93.9	96.8	97.8	98.9	99.0	99.2	99.4	99.5	99.7	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400	65.9	93.9	96.9	97.9	99.0	99.1	99.3	99.5	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300	65.9	93.9	96.9	97.9	99.0	99.1	99.3	99.5	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	65.9	93.9	96.9	97.9	99.0	99.1	99.3	99.5	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100	65.9	93.9	96.9	97.9	99.0	99.1	99.3	99.5	99.6	99.8	99.9	99.9	99.9	99.9	99.9	100.0
≥ 0	65.9	93.9	96.9	97.9	99.0	99.1	99.3	99.5	99.6	99.8	99.9	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 2045

USAFETAC FORM AA 44 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-70 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	47.7	65.2	66.7	67.0	67.2	67.2	67.3	67.3	67.3	67.4	67.4	67.4	67.4	67.4	67.4
≥ 20000	52.9	73.3	74.9	75.3	75.5	75.6	75.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 18000	53.1	73.8	75.3	75.8	76.0	76.0	76.1	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 16000	53.2	73.9	75.5	75.9	76.1	76.1	76.3	76.3	76.3	76.4	76.4	76.4	76.4	76.4	76.4
≥ 14000	54.2	75.3	76.8	77.3	77.5	77.6	77.7	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8
≥ 12000	55.9	78.0	79.6	80.1	80.4	80.4	80.5	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 10000	57.3	80.6	82.3	82.8	83.1	83.2	83.4	83.4	83.4	83.5	83.5	83.5	83.5	83.5	83.5
≥ 9000	57.6	81.1	82.7	83.4	83.7	83.8	83.9	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0
≥ 8000	59.1	83.5	85.2	85.8	86.1	86.2	86.4	86.4	86.4	86.5	86.5	86.5	86.5	86.5	86.5
≥ 7000	59.5	84.3	86.0	86.7	87.0	87.0	87.2	87.2	87.2	87.3	87.3	87.3	87.3	87.3	87.3
≥ 6000	60.0	85.3	87.1	87.7	88.0	88.1	88.3	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4
≥ 5000	60.4	86.4	88.2	88.9	89.1	89.2	89.4	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5
≥ 4500	60.5	86.6	88.5	89.1	89.4	89.5	89.7	89.7	89.7	89.8	89.8	89.8	89.8	89.8	89.8
≥ 4000	60.8	87.3	89.2	90.0	90.3	90.4	90.6	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 3500	61.0	88.0	89.9	90.7	91.1	91.2	91.4	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5
≥ 3000	61.3	89.0	91.1	91.9	92.4	92.5	92.7	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 2500	61.9	90.2	92.3	93.2	93.7	93.8	94.0	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 2000	62.2	90.9	93.3	94.1	94.6	94.7	95.0	95.0	95.0	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1800	62.4	91.4	93.9	94.7	95.3	95.4	95.6	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 1500	62.7	91.9	94.4	95.3	95.8	95.9	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 1200	62.9	92.4	95.0	95.8	96.5	96.6	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1000	62.9	92.6	95.2	96.1	96.8	96.9	97.2	97.2	97.2	97.3	97.3	97.3	97.3	97.3	97.3
≥ 900	63.0	93.0	95.6	96.5	97.3	97.4	97.6	97.7	97.7	97.8	97.8	97.8	97.8	97.8	97.8
≥ 800	63.0	93.5	96.0	97.1	97.9	98.0	98.3	98.4	98.4	98.5	98.5	98.5	98.5	98.5	98.5
≥ 700	63.0	93.8	96.4	97.5	98.4	98.5	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0
≥ 600	63.0	94.0	96.6	97.7	98.8	98.9	99.2	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4
≥ 500	63.1	94.2	96.8	97.9	99.0	99.1	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6
≥ 400	63.1	94.3	96.9	98.1	99.2	99.4	99.8	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300	63.1	94.3	96.9	98.1	99.2	99.4	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	63.1	94.3	96.9	98.1	99.2	99.4	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	63.1	94.3	96.9	98.1	99.2	99.4	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	63.1	94.3	96.9	98.1	99.2	99.4	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2046

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1¼	≥1	≥¾	≥¾	≥¾	≥5/16	≥¼	≥0
NO CEILING	42.3	67.9	69.2	76.4	70.6	71.0	71.0	71.1	71.2	71.2	71.3	71.3	71.3	71.3	71.3	71.4
≥ 20000	46.8	75.9	77.5	78.7	79.1	79.3	79.4	79.5	79.5	79.6	79.6	79.6	79.7	79.7	79.7	79.8
≥ 18000	47.3	76.5	78.1	79.3	79.7	79.9	80.0	80.1	80.2	80.3	80.3	80.3	80.4	80.4	80.4	80.5
≥ 16000	47.4	76.7	78.4	79.6	80.0	80.2	80.3	80.4	80.5	80.5	80.6	80.6	80.6	80.6	80.6	80.7
≥ 14000	48.1	77.7	79.4	80.6	81.1	81.3	81.4	81.5	81.6	81.6	81.7	81.7	81.7	81.7	81.7	81.8
≥ 12000	49.0	79.6	81.4	82.6	83.1	83.3	83.4	83.5	83.5	83.6	83.6	83.6	83.7	83.7	83.7	83.8
≥ 10000	49.8	82.3	84.1	85.3	85.8	86.0	86.1	86.2	86.3	86.3	86.4	86.4	86.4	86.4	86.4	86.6
≥ 9000	50.4	83.4	85.2	86.5	87.0	87.2	87.3	87.5	87.5	87.6	87.6	87.6	87.7	87.7	87.7	87.8
≥ 8000	51.1	84.8	86.7	88.1	88.7	88.9	89.0	89.1	89.2	89.3	89.3	89.3	89.4	89.4	89.4	89.5
≥ 7000	51.3	85.5	87.5	88.9	89.5	89.7	89.8	89.9	90.0	90.0	90.1	90.1	90.2	90.2	90.2	90.3
≥ 6000	51.6	86.6	88.6	89.9	90.6	90.8	90.9	91.0	91.1	91.1	91.2	91.2	91.2	91.2	91.2	91.3
≥ 5000	51.8	86.9	88.9	90.3	90.9	91.2	91.3	91.4	91.4	91.5	91.5	91.5	91.6	91.6	91.6	91.7
≥ 4500	51.9	87.3	89.3	90.7	91.3	91.5	91.6	91.7	91.8	91.8	91.9	91.9	92.0	92.0	92.0	92.1
≥ 4000	52.0	87.8	89.9	91.3	92.0	92.2	92.3	92.4	92.4	92.5	92.5	92.5	92.6	92.6	92.6	92.7
≥ 3500	52.1	88.0	90.2	91.6	92.3	92.5	92.6	92.7	92.7	92.8	92.9	92.9	92.9	92.9	92.9	93.0
≥ 3000	52.4	88.6	90.8	92.3	93.0	93.2	93.3	93.4	93.5	93.5	93.6	93.6	93.6	93.6	93.6	93.8
≥ 2500	52.5	89.5	91.9	93.3	94.1	94.3	94.4	94.5	94.5	94.6	94.7	94.7	94.7	94.7	94.7	94.8
≥ 2000	52.6	90.5	93.0	94.5	95.3	95.5	95.6	95.8	95.8	95.9	95.9	95.9	96.0	96.0	96.0	96.1
≥ 1800	52.6	90.7	93.2	94.8	95.5	95.7	95.8	96.0	96.0	96.1	96.1	96.1	96.2	96.2	96.2	96.3
≥ 1500	52.8	91.2	93.9	95.5	96.2	96.5	96.6	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	97.0
≥ 1200	52.8	91.8	94.5	96.2	97.0	97.2	97.4	97.5	97.6	97.6	97.7	97.7	97.7	97.7	97.7	97.8
≥ 1000	53.0	92.2	95.0	96.7	97.5	97.7	97.8	98.0	98.1	98.1	98.2	98.2	98.3	98.3	98.3	98.4
≥ 900	53.0	92.4	95.2	97.0	97.7	97.9	98.1	98.4	98.4	98.5	98.5	98.5	98.6	98.6	98.6	98.7
≥ 800	53.0	92.5	95.3	97.1	97.9	98.1	98.3	98.6	98.6	98.7	98.7	98.7	98.8	98.8	98.8	98.9
≥ 700	53.0	92.6	95.4	97.1	97.9	98.2	98.4	98.7	98.7	98.8	98.8	98.8	98.9	98.9	98.9	99.0
≥ 600	53.1	92.8	95.6	97.4	98.1	98.5	98.7	98.9	99.0	99.0	99.1	99.1	99.2	99.2	99.2	99.3
≥ 500	53.1	93.0	95.8	97.6	98.4	98.7	98.9	99.2	99.2	99.3	99.3	99.3	99.4	99.4	99.4	99.5
≥ 400	53.1	93.0	95.8	97.7	98.5	98.8	99.0	99.3	99.3	99.4	99.4	99.4	99.5	99.5	99.5	99.6
≥ 300	53.1	93.1	96.0	9 8	98.6	98.9	99.2	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.8
≥ 200	53.1	93.1	96.0	97.9	98.7	99.0	99.3	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.9
≥ 100	53.1	93.1	96.0	97.9	98.7	99.0	99.3	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.9
0	53.1	93.1	96.0	97.9	98.7	99.0	99.3	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 1889

USAFETAC FORM XL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	31.0	60.0	63.4	65.8	67.1	67.3	68.0	68.3	68.5	68.9	69.1	69.1	69.3	69.3	69.3	69.5
≥ 20000	33.5	65.9	69.8	72.3	73.7	74.0	74.6	75.1	75.3	75.8	75.9	75.9	76.1	76.1	76.1	76.4
≥ 18000	33.7	66.3	70.3	72.8	74.2	74.4	75.1	75.5	75.7	76.3	76.4	76.4	76.6	76.6	76.6	76.8
≥ 16000	33.9	66.5	70.5	73.0	74.4	74.7	75.4	75.8	76.0	76.6	76.7	76.7	76.9	76.9	76.9	77.1
≥ 14000	34.7	67.6	71.6	74.1	75.5	75.8	76.5	76.9	77.1	77.7	77.8	77.8	78.0	78.0	78.0	78.2
≥ 12000	35.4	69.4	73.5	76.0	77.5	77.7	78.4	78.9	79.1	79.6	79.8	79.8	80.0	80.0	80.0	80.2
≥ 10000	36.1	71.2	75.4	77.9	79.4	79.6	80.4	80.8	81.1	81.7	81.9	81.9	82.0	82.1	82.2	82.4
≥ 9000	36.7	72.7	76.8	79.3	80.8	81.1	81.8	82.3	82.5	83.1	83.3	83.3	83.5	83.5	83.6	83.8
≥ 8000	37.4	74.0	78.2	80.7	82.2	82.5	83.2	83.7	83.9	84.6	84.7	84.7	84.9	84.9	85.0	85.2
≥ 7000	37.5	74.5	78.7	81.2	82.8	83.1	83.9	84.3	84.5	85.2	85.3	85.3	85.5	85.5	85.6	85.8
≥ 6000	38.0	75.4	79.5	82.2	83.8	84.1	84.9	85.3	85.5	86.2	86.3	86.3	86.5	86.5	86.6	86.8
≥ 5000	38.2	76.3	80.5	83.2	84.8	85.1	85.9	86.3	86.5	87.2	87.4	87.4	87.5	87.6	87.6	87.8
≥ 4500	38.3	76.4	80.7	83.4	85.0	85.2	86.0	86.4	86.7	87.4	87.5	87.5	87.7	87.7	87.8	88.0
≥ 4000	38.4	76.7	81.0	83.7	85.3	85.6	86.4	86.8	87.1	87.7	87.9	87.9	88.1	88.2	88.2	88.4
≥ 3500	38.5	77.2	81.5	84.2	85.9	86.1	86.9	87.3	87.6	88.3	88.4	88.4	88.6	88.7	88.7	88.9
≥ 3000	38.6	77.6	82.0	84.7	86.4	86.7	87.5	87.9	88.2	88.9	89.0	89.0	89.2	89.3	89.4	89.6
≥ 2500	38.8	78.2	82.6	85.4	87.2	87.4	88.3	88.7	88.9	89.6	89.8	89.8	90.0	90.0	90.1	90.3
≥ 2000	38.9	79.2	83.7	86.5	88.3	88.6	89.4	89.8	90.1	90.8	90.9	90.9	91.1	91.2	91.2	91.4
≥ 1800	39.2	79.7	84.3	87.3	89.0	89.4	90.2	90.7	90.9	91.6	91.8	91.8	92.0	92.0	92.1	92.3
≥ 1500	39.4	80.6	85.3	88.2	90.1	90.4	91.3	91.7	92.0	92.6	92.8	92.8	93.1	93.1	93.2	93.4
≥ 1200	39.7	81.8	86.5	89.7	91.6	92.0	92.8	93.3	93.5	94.2	94.4	94.4	94.6	94.7	94.7	94.9
≥ 1000	39.8	82.2	87.0	90.2	92.2	92.5	93.4	93.8	94.1	94.7	94.9	94.9	95.1	95.2	95.3	95.5
≥ 900	39.8	82.5	87.2	90.5	92.5	92.8	93.7	94.1	94.4	95.0	95.2	95.2	95.5	95.5	95.6	95.8
≥ 800	39.9	82.7	87.5	90.8	92.8	93.1	94.0	94.5	94.7	95.4	95.6	95.6	95.8	95.9	95.9	96.1
≥ 700	40.0	82.9	87.8	91.1	93.1	93.4	94.4	94.8	95.1	95.8	95.9	95.9	96.2	96.2	96.3	96.5
≥ 600	40.0	83.0	87.8	91.1	93.3	93.6	94.5	95.0	95.3	95.9	96.1	96.1	96.3	96.4	96.5	96.7
≥ 500	40.0	83.4	88.3	91.7	93.9	94.3	95.3	95.8	96.1	96.9	97.0	97.0	97.3	97.3	97.4	97.6
≥ 400	40.0	83.5	88.4	91.8	94.1	94.4	95.5	96.0	96.3	97.1	97.2	97.2	97.5	97.5	97.6	97.8
≥ 300	40.0	83.7	88.6	92.1	94.5	94.8	95.9	96.5	96.8	97.7	97.9	97.9	98.2	98.3	98.3	98.5
≥ 200	40.0	83.7	88.6	92.2	94.6	95.0	96.1	96.8	97.0	98.2	98.5	98.5	98.8	98.9	99.1	99.3
≥ 100	40.0	83.7	88.6	92.2	94.6	95.0	96.1	96.8	97.0	98.2	98.5	98.5	98.8	98.9	99.1	99.4
0	40.0	83.7	88.6	92.2	94.6	95.0	96.1	96.8	97.0	98.2	98.5	98.5	98.9	99.0	99.2	100.0

TOTAL NUMBER OF OBSERVATIONS 1916

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	24.8	46.7	49.7	51.9	53.6	54.0	54.7	55.5	55.5	55.9	56.1	56.1	56.3	56.3	56.4	56.6
≥ 20000	29.4	55.2	58.8	61.6	63.5	64.0	64.8	65.5	65.6	66.1	66.3	66.3	66.5	66.6	66.6	66.9
≥ 18000	29.5	55.6	59.2	62.0	63.9	64.4	65.2	66.0	66.0	66.5	66.7	66.7	66.9	67.0	67.0	67.3
≥ 16000	29.6	56.0	59.7	62.4	64.3	64.8	65.7	66.4	66.5	67.0	67.2	67.2	67.4	67.4	67.5	67.7
≥ 14000	30.6	57.3	61.0	63.8	65.8	66.3	67.1	67.8	67.9	68.4	68.6	68.6	68.8	68.9	68.9	69.2
≥ 12000	32.2	61.0	64.7	67.6	69.6	70.1	70.9	71.7	71.7	72.3	72.5	72.5	72.7	72.7	72.8	73.0
≥ 10000	34.1	64.4	68.1	71.1	73.2	73.7	74.6	75.5	75.5	76.1	76.3	76.3	76.5	76.6	76.7	77.0
≥ 9000	34.7	65.4	69.4	72.3	74.4	74.9	75.9	76.7	76.8	77.4	77.6	77.6	77.8	77.8	78.0	78.3
≥ 8000	35.6	67.2	71.3	74.3	76.7	77.2	78.2	79.1	79.1	79.9	80.1	80.1	80.3	80.3	80.5	80.7
≥ 7000	35.8	67.8	72.1	75.1	77.5	78.0	79.0	79.9	79.9	80.7	80.9	80.9	81.1	81.1	81.3	81.6
≥ 6000	36.1	68.1	72.4	75.6	78.0	78.6	79.5	80.4	80.4	81.2	81.4	81.4	81.6	81.7	81.8	82.1
≥ 5000	36.3	68.5	72.8	76.0	78.4	79.0	79.9	80.8	80.8	81.6	81.9	81.9	82.1	82.1	82.3	82.5
≥ 4500	36.4	68.8	73.1	76.3	78.7	79.2	80.1	81.0	81.1	81.9	82.1	82.1	82.3	82.4	82.5	82.8
≥ 4000	36.5	69.3	73.6	76.8	79.3	79.8	80.7	81.7	81.7	82.5	82.7	82.7	82.9	83.0	83.1	83.4
≥ 3500	36.7	70.0	74.3	77.6	80.0	80.6	81.6	82.5	82.6	83.3	83.6	83.6	83.8	83.8	84.0	84.2
≥ 3000	37.2	70.8	75.3	78.5	80.9	81.6	82.5	83.4	83.5	84.2	84.5	84.5	84.7	84.8	84.9	85.2
≥ 2500	37.5	71.7	76.2	79.4	81.9	82.5	83.4	84.3	84.4	85.2	85.4	85.4	85.6	85.7	85.8	86.1
≥ 2000	38.0	72.9	77.5	80.8	83.5	84.1	85.1	86.0	86.1	86.8	87.1	87.1	87.3	87.3	87.5	87.8
≥ 1800	38.3	73.4	78.1	81.4	84.0	84.7	85.6	86.6	86.6	87.4	87.7	87.7	87.9	87.9	88.1	88.3
≥ 1500	38.7	74.2	79.0	82.4	85.1	85.7	86.7	87.7	87.7	88.5	88.7	88.7	88.9	89.0	89.1	89.4
≥ 1200	39.3	75.8	80.6	84.0	86.9	87.6	88.5	89.5	89.5	90.3	90.5	90.5	90.8	90.8	91.0	91.2
≥ 1000	39.5	76.6	81.4	85.0	87.9	88.5	89.5	90.5	90.5	91.3	91.6	91.6	91.8	91.8	92.0	92.2
≥ 900	39.6	77.0	81.9	85.5	88.4	89.1	90.1	91.1	91.2	91.9	92.2	92.2	92.4	92.4	92.6	92.8
≥ 800	40.1	78.0	83.0	86.6	89.6	90.3	91.3	92.4	92.4	93.2	93.5	93.5	93.7	93.8	93.9	94.2
≥ 700	40.2	78.8	83.9	87.6	90.6	91.3	92.4	93.5	93.5	94.4	94.6	94.6	94.8	94.9	95.0	95.3
≥ 600	40.3	79.1	84.3	88.1	91.2	91.9	93.0	94.1	94.2	95.0	95.3	95.3	95.5	95.5	95.7	95.9
≥ 500	40.3	79.3	84.8	88.7	91.9	92.6	93.7	94.9	95.0	95.9	96.2	96.2	96.4	96.4	96.6	96.8
≥ 400	40.3	79.6	85.2	89.1	92.5	93.2	94.5	95.7	95.8	96.8	97.2	97.2	97.4	97.5	97.6	97.9
≥ 300	40.3	79.6	85.2	89.2	92.8	93.6	95.0	96.3	96.4	97.5	97.9	97.9	98.2	98.2	98.4	98.8
≥ 200	40.3	79.6	85.2	89.2	92.8	93.6	95.1	96.4	96.6	97.7	98.2	98.2	98.5	98.6	98.8	99.3
≥ 100	40.3	79.6	85.2	89.2	92.8	93.6	95.1	96.4	96.6	97.7	98.2	98.2	98.7	98.8	99.2	99.7
0	40.3	79.6	85.2	89.2	92.8	93.6	95.1	96.4	96.6	97.7	98.2	98.2	98.7	98.8	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 1968

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	31.7	47.4	48.1	48.5	48.9	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0	49.0
≥ 20000	37.1	56.6	57.3	57.8	58.1	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 18000	37.2	56.7	57.5	57.9	58.3	58.4	58.4	58.4	58.4	58.4	58.4	58.4	58.4	58.4	58.4	58.4
≥ 16000	37.3	56.9	57.7	58.1	58.5	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6
≥ 14000	38.4	58.2	58.9	59.5	59.8	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9
≥ 12000	40.6	61.4	62.2	62.8	63.2	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3
≥ 10000	42.1	64.0	64.8	65.4	65.9	66.0	66.0	66.0	66.0	66.0	66.0	66.0	66.0	66.0	66.0	66.0
≥ 9000	42.6	64.8	65.7	66.2	66.7	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 8000	43.0	65.9	66.9	67.5	68.0	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 7000	43.4	66.6	67.5	68.2	68.8	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 6000	43.6	66.8	67.8	68.5	69.0	69.1	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2
≥ 5000	43.9	67.1	68.1	68.8	69.3	69.4	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5
≥ 4500	44.0	67.2	68.2	68.9	69.4	69.5	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6
≥ 4000	44.4	67.8	68.8	69.5	70.0	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 3500	45.4	69.2	70.2	70.9	71.4	71.5	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6
≥ 3000	47.6	72.1	73.2	73.9	74.4	74.5	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6
≥ 2500	52.1	78.9	80.0	80.8	81.4	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 2000	54.9	83.8	85.1	86.0	86.6	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 1800	56.4	86.2	87.6	88.5	89.1	89.3	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 1500	58.1	89.0	90.4	91.4	92.1	92.4	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5
≥ 1200	59.4	91.5	92.9	94.0	94.8	95.1	95.2	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 1000	59.8	92.5	94.0	95.0	95.8	96.1	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 900	60.1	93.2	94.9	96.0	96.9	97.3	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 800	60.2	93.8	95.5	96.6	97.6	98.0	98.2	98.3	98.3	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 700	60.2	94.1	95.9	97.1	98.0	98.4	98.6	98.7	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 600	60.2	94.4	96.2	97.4	98.3	98.7	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 500	60.2	94.7	96.5	97.7	98.8	99.2	99.5	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400	60.2	94.7	96.6	97.9	99.0	99.4	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300	60.2	94.7	96.6	97.9	99.0	99.5	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	60.2	94.7	96.6	97.9	99.0	99.5	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	60.2	94.7	96.6	97.9	99.0	99.5	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	60.2	94.7	96.6	97.9	99.0	99.5	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1968

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	29.3	38.7	38.9	39.1	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3
≥ 20000	37.3	48.7	49.0	49.2	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4
≥ 18000	37.5	49.1	49.3	49.5	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7
≥ 16000	37.5	49.1	49.4	49.6	49.7	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8	49.8
≥ 14000	39.2	51.3	51.6	51.9	52.0	52.1	52.1	52.1	52.1	52.1	52.1	52.1	52.1	52.1	52.1	52.1
≥ 12000	40.8	53.4	53.8	54.1	54.2	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3
≥ 10000	41.5	55.4	55.7	56.0	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2
≥ 9000	41.8	55.0	56.2	56.5	56.6	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7
≥ 8000	42.5	57.2	57.6	58.0	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 7000	42.7	57.7	58.1	58.5	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7
≥ 6000	42.9	57.9	58.3	58.7	58.8	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9
≥ 5000	43.3	58.4	58.8	59.2	59.3	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4
≥ 4500	43.7	59.0	59.5	59.9	60.1	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2
≥ 4000	45.9	62.4	62.9	63.4	63.6	63.7	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8
≥ 3500	49.2	67.1	67.7	68.2	68.5	68.6	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7
≥ 3000	55.5	75.3	76.1	76.6	77.0	77.1	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2
≥ 2500	63.5	87.1	88.2	88.8	89.3	89.5	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.7	89.7
≥ 2000	66.7	91.9	93.2	93.9	94.4	94.6	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.8	94.8
≥ 1800	67.3	93.0	94.3	95.0	95.5	95.7	95.8	95.8	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1500	67.9	93.9	95.3	96.0	96.6	96.8	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.1	97.1
≥ 1200	68.3	94.7	96.2	97.1	97.7	97.8	98.0	98.0	98.0	98.1	98.2	98.2	98.2	98.2	98.2	98.2
≥ 1000	68.5	95.1	96.6	97.5	98.1	98.3	98.4	98.4	98.4	98.5	98.6	98.6	98.6	98.6	98.6	98.6
≥ 900	68.5	95.3	96.8	97.7	98.4	98.5	98.7	98.7	98.7	98.8	98.8	98.8	98.8	98.8	98.9	98.9
≥ 800	68.5	95.4	96.9	98.0	98.6	98.8	99.0	99.0	99.0	99.1	99.2	99.2	99.2	99.2	99.2	99.2
≥ 700	68.5	95.5	97.1	98.2	98.8	99.0	99.2	99.2	99.2	99.3	99.4	99.4	99.4	99.4	99.4	99.4
≥ 600	68.5	95.6	97.4	98.5	99.1	99.3	99.5	99.5	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500	68.5	95.6	97.4	98.6	99.2	99.4	99.6	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.9	99.9
≥ 400	68.5	95.6	97.4	98.6	99.3	99.5	99.7	99.7	99.7	99.8	99.9	99.9	99.9	99.9	100.0	100.0
≥ 300	68.5	95.6	97.4	98.6	99.3	99.5	99.7	99.7	99.7	99.8	99.9	99.9	99.9	99.9	100.0	100.0
≥ 200	68.5	95.6	97.4	98.6	99.3	99.5	99.7	99.7	99.7	99.8	99.9	99.9	99.9	99.9	100.0	100.0
≥ 100	68.5	95.6	97.4	98.6	99.3	99.5	99.7	99.7	99.7	99.8	99.9	99.9	99.9	99.9	100.0	100.0
≥ 0	68.5	95.6	97.4	98.6	99.3	99.5	99.7	99.7	99.7	99.8	99.9	99.9	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM AC 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	33.3	44.6	44.9	45.1	45.1	45.1	45.1	45.1	45.1	45.1	45.1	45.1	45.1	45.1	45.1	45.1
≥ 20000	47.3	59.8	60.1	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3
≥ 18000	47.4	59.9	60.2	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4
≥ 16000	47.6	60.0	60.3	60.5	60.6	60.6	60.6	60.6	60.6	60.6	60.6	60.6	60.6	60.6	60.6	60.6
≥ 14000	48.5	61.2	61.5	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8
≥ 12000	49.7	63.6	64.0	64.2	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3
≥ 10000	50.7	67.3	67.7	67.9	68.0	68.0	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 9000	51.6	68.2	68.7	68.9	69.0	69.0	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 8000	52.2	69.6	70.3	70.6	70.6	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 7000	52.4	70.4	71.0	71.3	71.4	71.4	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5
≥ 6000	53.1	71.1	71.7	72.1	72.1	72.1	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 5000	53.8	72.5	73.1	73.5	73.6	73.6	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 4500	54.3	73.3	73.9	74.3	74.4	74.4	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5
≥ 4000	55.2	74.9	75.5	76.0	76.1	76.1	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 3500	56.6	77.5	78.3	78.8	78.9	78.9	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0
≥ 3000	60.3	83.2	84.1	84.8	85.1	85.1	85.2	85.2	85.2	85.2	85.3	85.3	85.3	85.3	85.3	85.3
≥ 2500	64.7	89.6	90.7	91.6	92.0	92.0	92.1	92.1	92.1	92.1	92.2	92.2	92.2	92.2	92.2	92.2
≥ 2000	66.2	92.0	93.4	94.4	94.9	94.9	95.0	95.0	95.0	95.0	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1800	66.5	92.6	94.2	95.1	95.6	95.6	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.9	95.9
≥ 1500	67.0	93.5	95.2	96.2	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.1	97.1
≥ 1200	67.5	94.4	96.1	97.1	97.7	97.7	97.9	97.9	97.9	97.9	98.0	98.0	98.0	98.0	98.0	98.0
≥ 1000	67.6	94.6	96.4	97.4	98.1	98.1	98.3	98.3	98.3	98.3	98.4	98.4	98.4	98.4	98.4	98.4
≥ 900	67.6	94.9	96.8	97.8	98.6	98.6	98.8	98.8	98.8	98.8	98.9	98.9	98.9	98.9	99.0	99.0
≥ 800	67.7	95.0	96.9	98.0	98.8	98.9	99.1	99.1	99.1	99.1	99.2	99.2	99.2	99.2	99.3	99.3
≥ 700	67.7	95.1	97.0	98.2	99.1	99.1	99.4	99.4	99.4	99.4	99.5	99.5	99.5	99.5	99.5	99.5
≥ 600	67.7	95.1	97.0	98.2	99.1	99.1	99.4	99.4	99.4	99.4	99.5	99.5	99.5	99.5	99.6	99.6
≥ 500	67.7	95.2	97.1	98.3	99.2	99.3	99.6	99.6	99.6	99.6	99.7	99.7	99.8	99.8	99.8	99.8
≥ 400	67.7	95.2	97.1	98.3	99.2	99.3	99.6	99.6	99.6	99.6	99.7	99.7	99.8	99.8	99.8	99.9
≥ 300	67.7	95.2	97.1	98.3	99.2	99.3	99.6	99.6	99.6	99.6	99.7	99.7	99.8	99.8	99.9	99.9
≥ 200	67.7	95.2	97.1	98.3	99.2	99.3	99.6	99.6	99.6	99.6	99.7	99.7	99.8	99.8	99.9	100.0
≥ 100	67.7	95.2	97.1	98.3	99.2	99.3	99.6	99.6	99.6	99.6	99.7	99.7	99.8	99.8	99.9	100.0
≥ 0	67.7	95.2	97.1	98.3	99.2	99.3	99.6	99.6	99.6	99.6	99.7	99.7	99.8	99.8	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	38.6	48.9	49.3	49.5	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6
≥ 20000	52.2	67.1	67.5	67.7	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9
≥ 18000	52.3	67.2	67.6	67.8	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
≥ 16000	52.4	67.5	67.9	68.1	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 14000	53.9	69.4	69.8	70.1	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2
≥ 12000	55.7	72.4	72.8	73.0	73.2	73.2	73.2	73.2	73.2	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 10000	58.0	76.8	77.5	77.8	77.9	77.9	77.9	77.9	77.9	78.0	78.1	78.1	78.1	78.1	78.1	78.1
≥ 9000	59.0	78.5	79.2	79.5	79.7	79.7	79.7	79.7	79.7	79.8	79.8	79.8	79.8	79.8	79.8	79.8
≥ 8000	59.5	80.6	81.5	81.9	82.1	82.1	82.1	82.1	82.1	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 7000	60.0	81.4	82.4	82.8	83.1	83.1	83.1	83.1	83.1	83.2	83.3	83.3	83.3	83.3	83.3	83.3
≥ 6000	60.6	82.1	83.2	83.5	83.9	83.9	83.9	83.9	83.9	84.0	84.1	84.1	84.1	84.1	84.1	84.1
≥ 5000	61.1	83.1	84.1	84.6	84.9	84.9	85.0	85.0	85.0	85.1	85.1	85.1	85.1	85.1	85.1	85.1
≥ 4500	61.3	83.5	84.6	85.0	85.4	85.4	85.5	85.5	85.5	85.6	85.7	85.7	85.7	85.7	85.7	85.7
≥ 4000	61.8	84.5	85.7	86.1	86.6	86.6	86.7	86.7	86.7	86.8	86.9	86.9	86.9	86.9	86.9	86.9
≥ 3500	62.1	85.2	86.7	87.1	87.6	87.7	87.7	87.7	87.7	87.9	87.9	87.9	87.9	87.9	87.9	87.9
≥ 3000	63.0	86.9	88.4	89.2	89.7	89.8	89.8	89.8	89.8	90.0	90.1	90.1	90.1	90.1	90.1	90.1
≥ 2500	64.2	89.7	91.3	92.3	93.0	93.0	93.1	93.1	93.1	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 2000	65.0	91.6	93.2	94.3	95.0	95.0	95.1	95.1	95.1	95.3	95.4	95.4	95.4	95.4	95.4	95.4
≥ 1800	65.3	92.3	94.0	95.1	95.8	95.8	95.9	95.9	95.9	96.1	96.2	96.2	96.2	96.2	96.2	96.2
≥ 1500	65.4	92.7	94.5	95.6	96.3	96.4	96.5	96.6	96.6	96.8	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1200	65.9	93.7	95.6	96.7	97.5	97.5	97.6	97.7	97.7	97.9	98.0	98.0	98.0	98.0	98.0	98.0
≥ 1000	65.9	93.9	95.8	97.0	97.9	97.9	98.0	98.1	98.1	98.3	98.5	98.5	98.6	98.6	98.6	98.6
≥ 900	65.9	93.9	95.9	97.0	97.9	98.0	98.1	98.2	98.2	98.4	98.6	98.6	98.7	98.7	98.7	98.7
≥ 800	65.9	94.0	96.0	97.1	98.0	98.1	98.2	98.3	98.3	98.5	98.7	98.7	98.9	98.9	98.9	98.9
≥ 700	65.9	94.0	96.0	97.1	98.0	98.1	98.2	98.3	98.3	98.5	98.7	98.7	98.9	98.9	98.9	98.9
≥ 600	65.9	94.1	96.0	97.2	98.3	98.3	98.4	98.5	98.5	98.7	98.9	98.9	99.1	99.1	99.1	99.1
≥ 500	65.9	94.1	96.2	97.5	98.5	98.6	98.7	98.8	98.8	99.0	99.3	99.3	99.5	99.5	99.5	99.5
≥ 400	65.9	94.1	96.2	97.5	98.5	98.6	98.7	98.8	98.8	99.1	99.4	99.4	99.5	99.5	99.5	99.5
≥ 300	65.9	94.1	96.3	97.6	98.6	98.7	98.8	98.9	98.9	99.3	99.6	99.6	99.8	99.8	99.8	99.8
≥ 200	65.9	94.1	96.3	97.6	98.6	98.7	98.8	98.9	98.9	99.4	99.6	99.6	99.9	99.9	99.9	99.9
≥ 100	65.9	94.1	96.3	97.6	98.6	98.7	98.8	98.9	98.9	99.4	99.7	99.7	99.9	99.9	100.0	100.0
0	65.9	94.1	96.3	97.6	98.6	98.7	98.8	98.9	98.9	99.4	99.7	99.7	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	45.5	62.1	62.5	62.8	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2
≥ 20000	53.5	74.2	75.1	75.5	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9
≥ 18000	53.8	74.6	75.4	75.8	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 16000	53.9	74.9	75.8	76.2	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6
≥ 14000	55.3	76.9	77.7	78.1	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 12000	57.2	80.5	81.4	81.9	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 10000	59.1	84.7	85.7	86.1	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5
≥ 9000	59.3	85.4	86.3	86.8	87.1	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 8000	60.4	87.6	88.6	89.0	89.4	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5
≥ 7000	60.7	88.3	89.3	89.7	90.1	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2
≥ 6000	61.0	88.7	89.7	90.2	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6
≥ 5000	61.3	89.3	90.3	90.8	91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 4500	61.3	89.7	90.7	91.2	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7
≥ 4000	61.5	90.2	91.3	91.8	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3
≥ 3500	62.1	91.5	92.7	93.2	93.7	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 3000	62.5	92.6	93.8	94.4	94.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 2500	62.6	93.5	94.8	95.3	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 2000	62.9	94.3	95.6	96.2	96.8	96.8	96.8	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1800	62.9	94.6	95.9	96.5	97.1	97.1	97.1	97.1	97.1	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1500	63.0	95.4	96.7	97.4	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1200	63.1	96.1	97.4	98.0	98.8	98.9	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1000	63.1	96.2	97.6	98.3	99.1	99.2	99.2	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 900	63.1	96.3	97.6	98.4	99.2	99.2	99.3	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 800	63.1	96.3	97.7	98.4	99.2	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 700	63.1	96.5	97.8	98.6	99.4	99.5	99.5	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 600	63.1	96.5	97.8	98.6	99.5	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500	63.1	96.5	97.8	98.7	99.6	99.6	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400	63.1	96.5	97.8	98.7	99.6	99.6	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 300	63.1	96.5	97.8	98.7	99.6	99.6	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 200	63.1	96.5	97.8	98.7	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 100	63.1	96.5	97.8	98.7	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	100.0	100.0
0	63.1	96.5	97.8	98.7	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1890

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	46.0	65.2	66.6	67.1	67.4	67.4	67.5	67.5	67.5	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 20000	51.4	74.8	76.3	76.7	77.2	77.2	77.3	77.3	77.3	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 18000	51.9	75.4	76.9	77.4	77.8	77.8	77.9	77.9	77.9	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 16000	52.7	76.2	77.7	78.1	78.5	78.5	78.6	78.6	78.6	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 14000	54.2	78.3	79.9	80.3	80.7	80.7	80.8	80.8	80.8	80.9	80.9	80.9	80.9	80.9	80.9	80.9
≥ 12000	55.8	81.7	83.3	83.7	84.1	84.1	84.2	84.2	84.2	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 10000	57.4	85.3	87.0	87.4	87.8	87.8	87.9	87.9	87.9	88.1	88.1	88.1	88.1	88.1	88.1	88.1
≥ 9000	57.9	86.2	88.0	88.4	88.8	88.8	88.9	88.9	88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 8000	58.6	88.1	90.0	90.4	90.8	90.8	90.9	90.9	90.9	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 7000	58.8	88.8	90.6	91.1	91.5	91.5	91.6	91.6	91.6	91.8	91.8	91.8	91.8	91.8	91.8	91.8
≥ 6000	59.0	89.3	91.1	91.6	92.0	92.0	92.2	92.2	92.2	92.3	92.3	92.3	92.3	92.3	92.3	92.3
≥ 5000	59.5	90.2	92.1	92.5	92.9	92.9	93.1	93.1	93.1	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 4500	59.7	90.7	92.6	93.0	93.4	93.4	93.6	93.6	93.6	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 4000	59.8	91.1	93.0	93.4	93.9	93.9	94.1	94.1	94.1	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 3500	59.9	91.8	93.6	94.1	94.6	94.6	94.7	94.7	94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 3000	60.0	92.2	94.1	94.6	95.1	95.1	95.3	95.3	95.3	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 2500	60.2	92.6	94.5	95.2	95.8	95.8	96.0	96.0	96.0	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 2000	60.4	93.1	95.1	95.9	96.4	96.4	96.6	96.6	96.6	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 1800	60.4	93.3	95.3	96.1	96.6	96.6	96.8	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1500	60.5	93.5	95.5	96.3	96.9	96.9	97.0	97.0	97.0	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1200	60.7	94.2	96.1	96.9	97.6	97.6	97.8	97.8	97.8	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 1000	60.8	94.4	96.4	97.2	97.9	97.9	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 900	60.8	94.4	96.4	97.2	98.0	98.1	98.3	98.3	98.3	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 800	60.8	94.5	96.5	97.4	98.2	98.2	98.4	98.4	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 700	60.8	94.7	96.7	97.6	98.4	98.4	98.7	98.7	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 600	60.8	94.8	96.9	97.7	98.5	98.6	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 500	60.8	95.1	97.2	98.1	98.9	99.0	99.3	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400	60.8	95.3	97.3	98.3	99.0	99.1	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300	60.8	95.3	97.4	98.4	99.1	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 200	60.8	95.3	97.4	98.4	99.1	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.9
≥ 100	60.8	95.3	97.4	98.4	99.1	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 0	60.8	95.3	97.4	98.4	99.1	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1952

USAFETAC FORM AR 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	38.4	62.9	65.1	67.1	68.1	68.3	68.9	69.2	69.2	69.5	69.6	69.6	69.7	69.8	69.9	69.9
≥ 20000	41.1	69.2	71.7	73.7	74.8	74.9	75.6	76.0	76.0	76.3	76.4	76.4	76.5	76.6	76.7	76.8
≥ 18000	41.6	69.8	72.3	74.3	75.4	75.5	76.3	76.6	76.6	76.9	77.0	77.0	77.1	77.2	77.3	77.4
≥ 16000	42.1	70.5	73.1	75.1	76.2	76.4	77.1	77.4	77.4	77.7	77.8	77.8	77.9	78.0	78.1	78.2
≥ 14000	43.3	72.5	75.0	77.1	78.1	78.3	79.0	79.3	79.3	79.6	79.7	79.7	79.8	79.9	80.0	80.1
≥ 12000	44.5	75.4	78.0	80.0	81.1	81.3	82.0	82.4	82.4	82.6	82.7	82.7	82.9	83.0	83.1	83.2
≥ 10000	46.7	79.7	82.3	84.3	85.5	85.6	86.5	86.9	86.9	87.1	87.2	87.2	87.4	87.5	87.6	87.7
≥ 9000	46.9	80.4	83.1	85.1	86.4	86.5	87.4	87.7	87.7	88.0	88.2	88.2	88.4	88.5	88.6	88.7
≥ 8000	47.4	81.6	84.2	86.3	87.5	87.7	88.5	88.9	88.9	89.2	89.3	89.3	89.5	89.6	89.7	89.8
≥ 7000	47.5	82.2	84.9	87.0	88.2	88.4	89.2	89.6	89.6	89.9	90.0	90.0	90.2	90.3	90.4	90.6
≥ 6000	47.9	82.7	85.5	87.6	88.8	89.0	89.8	90.2	90.2	90.5	90.7	90.7	90.9	91.0	91.1	91.2
≥ 5000	48.0	83.1	86.0	88.1	89.3	89.5	90.3	90.7	90.7	91.0	91.2	91.2	91.4	91.5	91.6	91.7
≥ 4500	48.2	83.2	86.2	88.3	89.5	89.7	90.6	90.9	90.9	91.2	91.4	91.4	91.6	91.7	91.8	91.9
≥ 4000	48.3	83.6	86.6	88.7	89.9	90.1	91.0	91.3	91.3	91.6	91.8	91.8	92.0	92.1	92.2	92.3
≥ 3500	48.3	83.7	86.6	88.7	90.0	90.1	91.0	91.4	91.4	91.7	91.8	91.8	92.0	92.1	92.2	92.3
≥ 3000	48.4	84.0	86.9	89.0	90.3	90.5	91.4	91.7	91.7	92.1	92.2	92.2	92.4	92.5	92.6	92.7
≥ 2500	48.5	84.6	87.6	89.8	91.3	91.4	92.3	92.7	92.7	93.0	93.2	93.2	93.4	93.5	93.6	93.7
≥ 2000	48.7	85.3	88.4	90.6	92.1	92.2	93.1	93.5	93.5	93.8	94.0	94.0	94.2	94.3	94.4	94.5
≥ 1800	48.7	85.5	88.6	90.9	92.4	92.6	93.5	93.8	93.8	94.2	94.3	94.3	94.5	94.6	94.7	94.8
≥ 1500	48.8	85.6	88.7	91.0	92.5	92.7	93.7	94.0	94.0	94.4	94.5	94.5	94.7	94.8	94.9	95.0
≥ 1200	48.9	85.9	89.2	91.4	92.9	93.1	94.2	94.5	94.5	94.9	95.0	95.0	95.3	95.4	95.5	95.6
≥ 1000	48.9	86.2	89.5	91.7	93.2	93.4	94.5	94.8	94.8	95.2	95.4	95.4	95.6	95.7	95.8	95.9
≥ 900	48.9	86.3	89.6	91.8	93.3	93.5	94.6	94.9	94.9	95.3	95.5	95.5	95.7	95.8	95.9	96.0
≥ 800	49.0	86.8	90.1	92.4	93.9	94.1	95.3	95.7	95.7	96.1	96.2	96.2	96.4	96.5	96.6	96.7
≥ 700	49.0	86.9	90.3	92.7	94.3	94.5	95.7	96.0	96.0	96.4	96.6	96.6	96.8	96.9	97.0	97.1
≥ 600	49.0	87.0	90.4	92.9	94.6	94.8	96.1	96.4	96.4	96.9	97.0	97.0	97.2	97.3	97.4	97.5
≥ 500	49.0	87.3	90.9	93.4	95.1	95.4	96.7	97.1	97.1	97.6	97.7	97.7	98.0	98.1	98.2	98.3
≥ 400	49.0	87.5	91.1	93.6	95.4	95.7	97.0	97.4	97.4	97.9	98.1	98.1	98.3	98.4	98.5	98.6
≥ 300	49.0	87.8	91.4	94.0	95.8	96.1	97.6	97.9	97.9	98.4	98.7	98.7	98.9	99.0	99.1	99.2
≥ 200	49.0	87.9	91.5	94.1	96.0	96.4	97.9	98.3	98.3	98.8	99.1	99.1	99.4	99.5	99.6	99.7
≥ 100	49.0	87.9	91.5	94.1	96.0	96.4	97.9	98.3	98.3	98.8	99.1	99.1	99.5	99.6	99.7	99.8
≥ 0	49.0	87.9	91.5	94.1	96.0	96.4	97.9	98.3	98.3	98.8	99.1	99.1	99.5	99.6	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 1979

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	33.9	55.2	57.6	59.5	61.2	61.5	62.1	62.3	62.3	62.6	62.7	62.7	62.7	62.8	62.9	62.9
≥ 20000	38.1	62.5	65.3	67.6	69.5	69.8	70.6	70.7	70.8	71.0	71.1	71.1	71.2	71.3	71.4	71.4
≥ 18000	38.4	62.9	65.7	67.9	69.9	70.2	71.0	71.1	71.1	71.4	71.5	71.5	71.6	71.7	71.8	71.8
≥ 16000	38.7	63.4	66.3	68.5	70.5	70.8	71.5	71.7	71.7	72.0	72.1	72.1	72.2	72.3	72.4	72.4
≥ 14000	40.3	65.7	68.6	70.8	72.7	73.1	73.8	74.0	74.0	74.3	74.4	74.4	74.5	74.6	74.7	74.7
≥ 12000	42.0	68.4	71.4	73.8	75.8	76.2	76.9	77.1	77.1	77.4	77.5	77.5	77.6	77.7	77.8	77.8
≥ 10000	44.1	72.9	76.2	78.7	80.9	81.3	82.1	82.3	82.4	82.7	82.8	82.8	82.9	83.0	83.1	83.1
≥ 9000	44.7	73.9	77.3	80.0	82.2	82.6	83.5	83.7	83.7	84.0	84.1	84.1	84.2	84.3	84.4	84.4
≥ 8000	45.0	74.9	78.3	81.1	83.4	83.8	84.7	84.9	84.9	85.3	85.4	85.4	85.5	85.6	85.7	85.7
≥ 7000	45.2	75.2	78.6	81.4	83.8	84.1	85.0	85.2	85.3	85.6	85.7	85.7	85.8	85.9	86.0	86.0
≥ 6000	45.3	75.3	78.7	81.5	83.9	84.2	85.1	85.3	85.4	85.7	85.8	85.8	85.9	86.0	86.1	86.1
≥ 5000	45.4	75.8	79.2	82.0	84.3	84.7	85.6	85.8	85.8	86.2	86.3	86.3	86.4	86.5	86.6	86.6
≥ 4500	45.5	76.0	79.5	82.3	84.6	85.0	85.9	86.1	86.2	86.5	86.6	86.6	86.7	86.8	86.9	86.9
≥ 4000	45.7	76.5	80.1	82.9	85.2	85.6	86.5	86.7	86.8	87.1	87.2	87.2	87.3	87.4	87.5	87.5
≥ 3500	46.0	77.0	80.6	83.4	85.8	86.2	87.1	87.3	87.3	87.7	87.8	87.8	87.9	88.0	88.1	88.1
≥ 3000	46.0	77.3	81.1	83.9	86.3	86.7	87.6	87.8	87.9	88.2	88.3	88.3	88.4	88.5	88.6	88.6
≥ 2500	46.4	78.1	81.9	84.7	87.2	87.6	88.5	88.8	88.8	89.2	89.4	89.4	89.5	89.6	89.7	89.7
≥ 2000	46.8	78.9	82.7	85.6	88.1	88.5	89.5	89.8	89.8	90.2	90.3	90.3	90.4	90.5	90.6	90.7
≥ 1800	47.0	79.1	82.9	85.8	88.3	88.7	89.7	90.0	90.0	90.4	90.5	90.5	90.6	90.7	90.8	90.9
≥ 1500	47.4	79.8	83.8	86.7	89.3	89.7	90.7	90.9	91.0	91.4	91.5	91.5	91.6	91.7	91.8	91.9
≥ 1200	47.8	80.4	84.6	87.5	90.1	90.5	91.5	91.8	91.8	92.2	92.4	92.4	92.5	92.6	92.7	92.7
≥ 1000	47.9	80.6	85.1	88.1	90.7	91.1	92.2	92.5	92.5	92.9	93.1	93.1	93.2	93.3	93.4	93.5
≥ 900	48.1	81.1	85.6	88.6	91.3	91.7	92.8	93.1	93.2	93.5	93.7	93.7	93.8	93.9	94.0	94.1
≥ 800	48.2	81.6	86.1	89.1	91.9	92.3	93.4	93.7	93.8	94.2	94.3	94.3	94.5	94.6	94.7	94.7
≥ 700	48.6	82.5	87.1	90.1	92.9	93.3	94.4	94.8	94.9	95.3	95.4	95.4	95.6	95.7	95.8	95.8
≥ 600	48.8	83.1	87.7	90.8	93.6	94.1	95.2	95.7	95.8	96.2	96.3	96.3	96.5	96.6	96.7	96.7
≥ 500	48.9	83.5	88.2	91.5	94.3	94.8	96.2	96.8	96.8	97.3	97.4	97.4	97.7	97.8	97.9	97.9
≥ 400	49.0	83.9	88.9	92.2	95.3	95.8	97.2	97.8	97.8	98.3	98.5	98.5	98.7	98.8	98.9	99.0
≥ 300	49.0	84.2	89.2	92.7	95.8	96.3	97.8	98.3	98.5	99.1	99.2	99.2	99.5	99.6	99.7	99.7
≥ 200	49.0	84.3	89.3	92.9	96.0	96.5	98.0	98.7	98.8	99.3	99.5	99.5	99.7	99.8	99.9	100.0
≥ 100	49.0	84.3	89.3	92.9	96.0	96.5	98.0	98.7	98.8	99.3	99.5	99.5	99.7	99.8	99.9	100.0
0	49.0	84.3	89.3	92.9	96.0	96.5	98.0	98.7	98.8	99.3	99.5	99.5	99.7	99.8	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 2031

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	35.2	47.3	48.0	48.4	48.6	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7
≥ 20000	40.3	55.1	55.9	56.4	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7
≥ 18000	40.5	55.3	56.1	56.6	56.8	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9
≥ 16000	40.7	55.5	56.3	56.7	57.0	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1
≥ 14000	43.0	58.2	59.1	59.5	59.8	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9
≥ 12000	45.1	61.3	62.2	62.7	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0
≥ 10000	46.7	64.7	65.7	66.2	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6
≥ 9000	47.4	66.0	66.9	67.4	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8
≥ 8000	48.1	67.2	68.2	68.8	69.2	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 7000	48.3	67.6	68.7	69.3	69.7	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥ 6000	48.4	67.8	68.9	69.5	69.9	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
≥ 5000	48.5	68.0	69.2	69.9	70.3	70.3	70.3	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4
≥ 4500	48.5	68.1	69.4	70.0	70.5	70.5	70.5	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6
≥ 4000	48.6	68.2	69.5	70.2	70.6	70.7	70.7	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8
≥ 3500	49.4	69.1	70.4	71.1	71.5	71.6	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 3000	53.0	73.8	75.1	75.8	76.3	76.3	76.4	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 2500	58.0	80.6	82.1	82.8	83.3	83.3	83.3	83.4	83.4	83.5	83.5	83.5	83.5	83.5	83.5	83.5
≥ 2000	61.9	85.9	87.5	88.2	88.7	88.8	88.8	88.9	88.9	89.0	89.0	89.0	89.0	89.0	89.0	89.0
≥ 1800	62.9	87.4	89.1	89.8	90.3	90.3	90.4	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5
≥ 1500	64.2	89.7	91.7	92.4	93.0	93.1	93.2	93.3	93.3	93.3	93.3	93.3	93.4	93.4	93.4	93.4
≥ 1200	65.5	92.1	94.1	94.9	95.6	95.6	95.7	95.8	95.9	95.9	95.9	95.9	96.0	96.0	96.0	96.0
≥ 1000	65.8	93.2	95.5	96.2	97.0	97.0	97.1	97.2	97.3	97.3	97.3	97.3	97.4	97.4	97.4	97.4
≥ 900	66.0	93.5	95.8	96.6	97.3	97.4	97.5	97.6	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 800	66.1	93.9	96.4	97.1	98.0	98.1	98.2	98.3	98.3	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 700	66.2	94.3	96.7	97.5	98.4	98.5	98.6	98.7	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 600	66.3	94.3	96.8	97.6	98.6	98.6	98.7	98.8	98.9	98.9	98.9	98.9	99.0	99.0	99.0	99.0
≥ 500	66.3	94.4	97.0	97.9	99.1	99.2	99.4	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 400	66.3	94.4	97.1	98.0	99.3	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300	66.3	94.4	97.1	98.0	99.3	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	66.3	94.4	97.1	98.0	99.3	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	66.3	94.4	97.1	98.0	99.3	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	66.3	94.4	97.1	98.0	99.3	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2030

USAFETAC FORM XR 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	30.4	38.2	38.6	38.6	38.6	38.6	38.6	38.6	38.6	38.6	38.6	38.6	38.6	38.6	38.6	38.6
≥ 20000	38.4	48.7	49.3	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4
≥ 18000	38.5	48.8	49.4	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5
≥ 16000	39.1	49.5	50.1	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2
≥ 14000	40.5	51.2	51.8	51.9	51.9	51.9	51.9	51.9	51.9	51.9	51.9	51.9	51.9	51.9	51.9	51.9
≥ 12000	42.2	53.9	54.5	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7
≥ 10000	44.2	56.9	57.5	57.7	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8
≥ 9000	44.4	57.2	58.0	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 8000	45.1	58.1	58.9	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 7000	45.4	58.4	59.3	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5
≥ 6000	45.4	58.7	59.6	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8
≥ 5000	45.5	59.0	60.0	60.2	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3
≥ 4500	46.2	59.8	60.7	60.9	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.1	61.1	61.1	61.1	61.1
≥ 4000	47.8	61.5	62.5	62.7	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.9	62.9	62.9	62.9	62.9
≥ 3500	51.2	66.2	67.5	67.7	67.8	67.8	67.8	67.8	67.8	67.9	67.9	67.9	67.9	67.9	67.9	67.9
≥ 3000	59.3	77.0	78.4	78.7	78.9	78.9	79.0	79.0	79.0	79.0	79.0	79.1	79.1	79.1	79.1	79.1
≥ 2500	67.4	88.3	89.9	90.2	90.5	90.5	90.6	90.6	90.6	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 2000	69.4	92.7	94.3	94.7	95.0	95.1	95.2	95.3	95.3	95.3	95.3	95.4	95.4	95.4	95.4	95.4
≥ 1800	69.9	93.5	95.2	95.6	96.0	96.0	96.2	96.2	96.2	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 1500	70.6	94.6	96.5	96.9	97.3	97.4	97.6	97.7	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8
≥ 1200	71.2	95.7	97.6	98.1	98.5	98.5	98.8	98.9	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0
≥ 1000	71.3	95.9	97.9	98.4	98.8	98.8	99.1	99.2	99.2	99.3	99.3	99.3	99.4	99.4	99.4	99.4
≥ 900	71.3	95.9	97.9	98.4	98.9	98.9	99.2	99.3	99.3	99.4	99.4	99.4	99.5	99.5	99.5	99.5
≥ 800	71.3	96.0	97.9	98.5	99.0	99.1	99.3	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6
≥ 700	71.3	96.0	98.0	98.6	99.1	99.1	99.4	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 600	71.3	96.1	98.1	98.7	99.2	99.2	99.5	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8
≥ 500	71.3	96.1	98.1	98.7	99.3	99.3	99.6	99.7	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 400	71.3	96.1	98.1	98.7	99.3	99.4	99.6	99.7	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.0
≥ 300	71.3	96.1	98.1	98.7	99.3	99.4	99.6	99.7	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.0
≥ 200	71.3	96.1	98.1	98.7	99.3	99.4	99.6	99.7	99.7	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	71.3	96.1	98.1	98.7	99.3	99.4	99.6	99.7	99.7	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	71.3	96.1	98.1	98.7	99.3	99.4	99.6	99.7	99.7	99.8	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2016

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	35.1	42.3	42.5	42.7	42.7	42.7	42.7	42.7	42.7	42.7	42.7	42.7	42.7	42.7	42.7	42.7
≥ 20000	48.0	58.9	59.1	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4
≥ 18000	48.2	59.1	59.4	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7
≥ 16000	48.7	59.7	59.9	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2
≥ 14000	50.5	61.8	62.1	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4
≥ 12000	53.1	65.7	66.0	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 10000	54.6	68.2	68.5	68.8	68.8	68.8	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 9000	55.1	68.8	69.2	69.5	69.5	69.5	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6
≥ 8000	56.0	70.6	71.0	71.3	71.3	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 7000	56.3	71.3	71.8	72.1	72.1	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 6000	56.6	71.9	72.3	72.7	72.7	72.7	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8
≥ 5000	57.2	72.8	73.3	73.7	73.7	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 4500	57.4	73.5	74.0	74.5	74.5	74.5	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6
≥ 4000	58.7	75.2	75.8	76.3	76.4	76.4	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 3500	60.1	77.5	78.3	78.8	78.9	78.9	79.0	79.0	79.0	79.1	79.1	79.1	79.1	79.1	79.1	79.1
≥ 3000	64.1	84.0	85.4	86.0	86.2	86.2	86.4	86.4	86.4	86.5	86.5	86.5	86.5	86.5	86.6	86.6
≥ 2500	67.3	90.3	91.9	92.7	93.0	93.1	93.2	93.2	93.2	93.3	93.3	93.3	93.4	93.4	93.4	93.4
≥ 2000	68.3	92.6	94.4	95.3	95.6	95.7	95.9	95.9	95.9	96.0	96.0	96.0	96.1	96.1	96.1	96.1
≥ 1800	68.6	93.2	95.0	95.9	96.3	96.4	96.6	96.6	96.6	96.8	96.8	96.8	96.8	96.8	96.9	96.9
≥ 1500	68.8	93.8	95.9	96.9	97.3	97.5	97.7	97.7	97.7	97.9	97.9	97.9	98.0	98.0	98.0	98.0
≥ 1200	69.1	94.3	96.4	97.4	97.8	98.0	98.2	98.3	98.3	98.5	98.5	98.5	98.6	98.6	98.6	98.6
≥ 1000	69.1	94.6	96.7	97.8	98.2	98.4	98.7	98.8	98.8	99.1	99.1	99.1	99.1	99.1	99.2	99.2
≥ 900	69.1	94.6	96.7	97.8	98.2	98.4	98.7	98.8	98.8	99.1	99.1	99.1	99.1	99.1	99.2	99.2
≥ 800	69.1	94.6	96.8	97.9	98.4	98.6	98.9	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.4	99.4
≥ 700	69.1	94.7	96.9	98.0	98.5	98.7	99.0	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.5	99.5
≥ 600	69.1	94.7	96.9	98.0	98.5	98.7	99.1	99.2	99.2	99.4	99.4	99.4	99.5	99.5	99.5	99.5
≥ 500	69.1	94.7	96.9	98.0	98.5	98.7	99.1	99.2	99.2	99.4	99.5	99.5	99.5	99.5	99.6	99.6
≥ 400	69.1	94.7	96.9	98.0	98.5	98.7	99.1	99.2	99.2	99.4	99.5	99.5	99.6	99.6	99.7	99.7
≥ 300	69.1	94.7	96.9	98.0	98.5	98.7	99.1	99.2	99.3	99.5	99.6	99.6	99.8	99.8	99.8	99.8
≥ 200	69.1	94.7	96.9	98.0	98.5	98.7	99.1	99.2	99.3	99.5	99.8	99.8	99.9	99.9	100.0	100.0
≥ 100	69.1	94.7	96.9	98.0	98.5	98.7	99.1	99.2	99.3	99.5	99.8	99.8	99.9	99.9	100.0	100.0
0	69.1	94.7	96.9	98.0	98.5	98.7	99.1	99.2	99.3	99.5	99.8	99.8	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2016

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	3. .5	41.2	41.4	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6
≥ 20000	51.0	63.2	63.4	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7
≥ 18000	51.4	63.5	63.7	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0
≥ 16000	51.5	63.8	64.1	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3
≥ 14000	53.5	66.9	67.1	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4
≥ 12000	57.0	72.0	72.4	72.6	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7
≥ 10000	60.1	77.3	77.7	77.9	78.0	78.0	78.1	78.1	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 9000	60.8	79.2	79.7	79.9	80.0	80.0	80.1	80.1	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2
≥ 8000	62.1	82.6	83.1	83.5	83.5	83.5	83.6	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 7000	62.8	83.6	84.1	84.4	84.5	84.5	84.6	84.6	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
≥ 6000	63.2	84.1	84.6	85.0	85.0	85.0	85.2	85.2	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 5000	63.5	85.0	85.6	86.0	86.0	86.0	86.2	86.3	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4
≥ 4500	63.6	85.5	86.1	86.4	86.5	86.5	86.7	86.7	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 4000	64.1	86.6	87.3	87.7	87.7	87.7	87.9	88.0	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1
≥ 3500	64.3	87.5	88.3	88.6	88.8	88.8	89.0	89.0	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 3000	65.1	89.3	90.5	90.9	91.1	91.1	91.4	91.5	91.6	91.6	91.6	91.6	91.6	91.6	91.6	91.6
≥ 2500	65.9	91.7	92.8	93.2	93.3	93.5	93.9	94.0	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 2000	66.4	93.0	94.3	95.0	95.4	95.4	95.8	95.9	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1800	66.5	93.3	94.9	95.4	95.8	95.8	96.1	96.2	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 1500	67.0	94.4	96.0	96.6	97.0	97.0	97.4	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 1200	67.3	95.1	96.8	97.5	98.0	98.0	98.4	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 1000	67.3	95.2	97.0	97.6	98.2	98.2	98.6	98.7	98.8	98.8	98.9	98.9	98.9	98.9	98.9	98.9
≥ 900	67.3	95.3	97.1	97.8	98.4	98.4	98.8	98.9	99.0	99.0	99.1	99.1	99.1	99.1	99.1	99.1
≥ 800	67.3	95.4	97.2	97.9	98.5	98.5	98.9	99.1	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 700	67.3	95.5	97.3	98.1	98.6	98.7	99.1	99.3	99.4	99.4	99.5	99.5	99.5	99.5	99.5	99.5
≥ 600	67.3	95.6	97.4	98.2	98.7	98.8	99.2	99.4	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500	67.3	95.6	97.4	98.2	98.8	98.8	99.3	99.4	99.6	99.7	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400	67.3	95.6	97.5	98.3	98.8	98.9	99.3	99.5	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300	67.3	95.6	97.5	98.3	98.8	98.9	99.4	99.5	99.7	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 200	67.3	95.6	97.5	98.3	98.8	98.9	99.4	99.5	99.7	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	67.3	95.6	97.5	98.3	98.8	98.9	99.4	99.5	99.7	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	67.3	95.6	97.5	98.3	98.8	98.9	99.4	99.5	99.7	99.8	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	45.3	55.7	56.5	56.9	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0
≥ 20000	56.2	70.9	71.9	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 18000	56.5	71.1	72.2	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7
≥ 16000	56.9	71.7	72.7	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2
≥ 14000	58.8	74.3	75.3	75.9	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0
≥ 12000	61.4	78.2	79.4	80.0	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 10000	63.7	83.1	84.6	85.1	85.2	85.2	85.3	85.3	85.4	85.4	85.4	85.4	85.4	85.4	85.4	85.4
≥ 9000	64.2	84.4	85.9	86.4	86.6	86.6	86.6	86.7	86.7	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 8000	64.8	86.7	88.2	88.7	88.9	88.9	88.9	89.0	89.0	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 7000	65.1	87.6	89.1	89.7	89.9	89.9	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 6000	65.6	88.3	89.7	90.3	90.5	90.5	90.6	90.6	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 5000	66.1	89.4	91.1	91.6	91.9	91.9	91.9	92.0	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 4500	66.3	89.7	91.5	92.1	92.3	92.3	92.3	92.4	92.4	92.5	92.5	92.5	92.5	92.5	92.5	92.5
≥ 4000	66.4	90.8	92.6	93.1	93.3	93.3	93.4	93.5	93.5	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 3500	66.6	91.1	93.0	93.6	93.8	93.8	93.9	94.0	94.0	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 3000	66.7	92.3	94.2	94.8	95.1	95.1	95.2	95.2	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 2500	66.8	93.1	95.2	95.8	96.1	96.1	96.2	96.3	96.3	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 2000	67.1	93.9	96.1	96.8	97.0	97.0	97.1	97.2	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1800	67.1	94.1	96.3	97.0	97.2	97.2	97.3	97.4	97.4	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1500	67.2	94.7	97.0	97.6	97.9	97.9	98.1	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1200	67.5	95.3	97.5	98.3	98.6	98.6	98.7	98.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 1000	67.5	95.3	97.6	98.4	98.7	98.7	98.9	99.0	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 900	67.5	95.4	97.6	98.4	98.8	98.8	99.0	99.1	99.1	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 800	67.6	95.6	97.8	98.6	99.0	99.0	99.2	99.3	99.4	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 700	67.7	95.6	97.9	98.7	99.0	99.1	99.4	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600	67.7	95.6	97.9	98.7	99.0	99.1	99.4	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500	67.7	95.8	98.1	98.8	99.2	99.2	99.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400	67.7	95.8	98.1	98.8	99.2	99.2	99.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300	67.7	95.8	98.1	98.8	99.2	99.2	99.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	67.7	95.8	98.1	98.8	99.2	99.2	99.6	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	67.7	95.8	98.1	98.8	99.2	99.2	99.6	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	67.7	95.8	98.1	98.8	99.2	99.2	99.6	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1951

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	41.7	65.4	67.4	68.4	68.7	68.7	68.8	68.8	68.9	68.9	68.9	68.9	68.9	68.9	68.9	69.0
≥ 20000	47.0	74.7	77.2	78.3	78.6	78.6	78.8	78.8	78.9	78.9	78.9	78.9	79.0	79.0	79.0	79.1
≥ 18000	47.1	74.8	77.4	78.4	78.8	78.8	78.9	79.0	79.0	79.0	79.0	79.0	79.2	79.2	79.2	79.2
≥ 16000	47.1	74.9	77.4	78.5	78.9	78.9	79.0	79.0	79.1	79.1	79.1	79.1	79.2	79.2	79.2	79.3
≥ 14000	48.0	76.1	78.8	79.9	80.2	80.2	80.3	80.4	80.4	80.4	80.4	80.4	80.6	80.6	80.6	80.6
≥ 12000	49.2	78.5	81.2	82.3	82.7	82.7	82.8	82.8	82.9	82.9	82.9	82.9	83.1	83.1	83.1	83.1
≥ 10000	50.8	81.9	84.6	85.9	86.3	86.3	86.4	86.4	86.5	86.5	86.5	86.5	86.7	86.7	86.7	86.7
≥ 9000	51.4	82.9	85.7	86.9	87.4	87.4	87.5	87.5	87.6	87.6	87.6	87.6	87.8	87.8	87.8	87.8
≥ 8000	52.4	84.9	87.9	89.1	89.6	89.6	89.7	89.7	89.8	89.8	89.8	89.8	90.0	90.0	90.0	90.0
≥ 7000	52.7	85.4	88.3	89.6	90.0	90.0	90.1	90.2	90.2	90.2	90.3	90.3	90.4	90.4	90.4	90.5
≥ 6000	53.0	85.9	88.8	90.1	90.5	90.5	90.6	90.7	90.7	90.7	90.8	90.8	90.9	90.9	90.9	91.0
≥ 5000	53.3	86.4	89.4	90.7	91.2	91.2	91.3	91.4	91.4	91.4	91.5	91.5	91.7	91.7	91.7	91.7
≥ 4500	53.6	86.7	89.7	91.0	91.6	91.6	91.7	91.7	91.8	91.8	91.8	91.8	92.0	92.0	92.0	92.0
≥ 4000	53.7	87.2	90.2	91.4	92.1	92.1	92.2	92.3	92.3	92.3	92.4	92.4	92.5	92.5	92.5	92.6
≥ 3500	54.1	87.9	90.9	92.2	92.8	92.8	92.9	93.0	93.0	93.0	93.1	93.1	93.2	93.2	93.2	93.3
≥ 3000	54.3	88.5	91.5	92.8	93.5	93.5	93.6	93.7	93.7	93.7	93.8	93.8	93.9	93.9	93.9	94.0
≥ 2500	54.5	89.1	92.2	93.5	94.3	94.3	94.4	94.4	94.5	94.5	94.5	94.5	94.7	94.7	94.7	94.7
≥ 2000	54.7	89.8	92.9	94.3	95.0	95.0	95.1	95.1	95.2	95.2	95.2	95.2	95.4	95.4	95.4	95.4
≥ 1800	54.7	90.1	93.2	94.6	95.3	95.3	95.4	95.5	95.5	95.5	95.6	95.6	95.8	95.8	95.8	95.8
≥ 1500	54.7	90.3	93.7	95.2	95.9	95.9	96.0	96.2	96.2	96.3	96.3	96.3	96.5	96.5	96.5	96.5
≥ 1200	54.8	90.6	94.0	95.5	96.3	96.3	96.5	96.6	96.7	96.8	96.9	96.9	97.0	97.0	97.0	97.1
≥ 1000	55.0	90.9	94.4	95.9	96.7	96.7	96.9	97.0	97.1	97.2	97.3	97.3	97.4	97.4	97.4	97.5
≥ 900	55.0	91.1	94.6	96.1	97.0	97.0	97.2	97.3	97.4	97.6	97.7	97.7	97.8	97.8	97.8	97.9
≥ 800	55.1	91.3	94.8	96.4	97.2	97.2	97.4	97.6	97.7	98.0	98.0	98.0	98.2	98.2	98.2	98.2
≥ 700	55.1	91.3	94.8	96.4	97.2	97.2	97.5	97.7	97.7	98.0	98.1	98.1	98.2	98.2	98.2	98.3
≥ 600	55.1	91.4	95.0	96.5	97.4	97.4	97.7	98.0	98.1	98.3	98.4	98.4	98.5	98.5	98.5	98.6
≥ 500	55.1	91.6	95.1	96.7	97.6	97.6	98.0	98.2	98.3	98.5	98.6	98.6	98.7	98.7	98.7	98.8
≥ 400	55.1	91.7	95.3	96.8	97.8	97.9	98.3	98.5	98.6	98.8	98.9	98.9	99.0	99.0	99.0	99.1
≥ 300	55.1	91.8	95.4	97.0	98.2	98.3	98.7	99.0	99.0	99.4	99.5	99.5	99.7	99.7	99.7	99.7
≥ 200	55.1	91.8	95.4	97.0	98.3	98.3	98.7	99.0	99.1	99.6	99.7	99.7	99.9	99.9	99.9	100.0
≥ 100	55.1	91.8	95.4	97.0	98.3	98.3	98.7	99.0	99.1	99.6	99.7	99.7	99.9	99.9	99.9	100.0
0	55.1	91.8	95.4	97.0	98.3	98.3	98.7	99.0	99.1	99.6	99.7	99.7	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1953

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	32.4	61.3	65.8	68.5	70.2	70.4	71.5	71.9	71.9	72.2	72.5	72.5	72.7	72.7	72.7	72.8
≥ 20000	35.9	66.7	71.9	74.6	76.6	76.8	77.9	78.3	78.3	78.6	78.9	78.9	79.1	79.1	79.1	79.2
≥ 18000	35.9	66.8	71.9	74.7	76.6	76.9	78.0	78.4	78.4	78.7	78.9	78.9	79.1	79.1	79.1	79.2
≥ 16000	35.9	67.0	72.2	74.9	76.9	77.1	78.2	78.6	78.6	78.9	79.2	79.2	79.4	79.4	79.4	79.5
≥ 14000	36.6	68.1	73.3	76.1	78.0	78.3	79.4	79.8	79.8	80.1	80.3	80.3	80.5	80.5	80.5	80.6
≥ 12000	37.4	69.7	75.2	78.0	79.9	80.1	81.3	81.7	81.7	82.1	82.3	82.3	82.5	82.5	82.5	82.6
≥ 10000	38.7	72.0	77.6	80.4	82.4	82.6	83.8	84.2	84.2	84.6	84.9	84.9	85.1	85.1	85.1	85.2
≥ 9000	39.3	72.7	78.4	81.2	83.2	83.5	84.7	85.1	85.1	85.5	85.8	85.8	86.0	86.0	86.0	86.1
≥ 8000	40.0	74.3	80.2	83.0	84.9	85.3	86.5	86.9	86.9	87.3	87.6	87.6	87.8	87.8	87.8	87.9
≥ 7000	40.3	74.7	80.6	83.4	85.3	85.7	86.9	87.3	87.3	87.7	88.0	88.0	88.2	88.2	88.2	88.3
≥ 6000	40.4	74.9	81.1	83.9	85.9	86.2	87.4	87.8	87.8	88.2	88.5	88.5	88.7	88.7	88.7	88.8
≥ 5000	40.9	75.7	81.9	84.7	86.9	87.2	88.4	88.8	88.8	89.2	89.5	89.5	89.7	89.7	89.7	89.8
≥ 4500	41.0	75.8	82.1	84.9	87.1	87.4	88.6	89.0	89.0	89.5	89.7	89.7	89.9	89.9	89.9	90.0
≥ 4000	41.3	76.3	82.6	85.4	87.6	87.9	89.1	89.5	89.5	90.0	90.2	90.2	90.4	90.4	90.4	90.6
≥ 3500	41.4	76.6	82.9	85.8	88.0	88.3	89.5	89.9	89.9	90.4	90.7	90.7	90.9	90.9	90.9	91.0
≥ 3000	41.6	77.1	83.4	86.3	88.5	88.9	90.1	90.5	90.5	91.0	91.2	91.2	91.4	91.4	91.4	91.5
≥ 2500	41.6	77.6	84.1	87.0	89.2	89.6	90.9	91.3	91.3	91.8	92.0	92.0	92.2	92.2	92.2	92.3
≥ 2000	42.0	78.4	84.9	87.8	90.1	90.6	91.8	92.2	92.2	92.7	92.9	92.9	93.1	93.1	93.1	93.2
≥ 1800	42.3	78.7	85.2	88.1	90.4	90.9	92.1	92.5	92.5	93.0	93.2	93.2	93.4	93.4	93.4	93.5
≥ 1500	42.3	79.1	85.8	88.6	90.9	91.4	92.6	93.0	93.0	93.6	93.8	93.8	94.0	94.0	94.0	94.1
≥ 1200	42.3	79.5	86.3	89.2	91.6	92.1	93.3	93.7	93.7	94.3	94.5	94.5	94.7	94.7	94.7	94.8
≥ 1000	42.4	79.7	86.5	89.4	91.8	92.3	93.6	94.1	94.1	94.7	94.9	94.9	95.2	95.2	95.2	95.3
≥ 900	42.5	80.0	86.8	89.7	92.2	92.7	94.0	94.5	94.5	95.1	95.4	95.4	95.6	95.6	95.6	95.7
≥ 800	42.6	80.2	87.2	90.1	92.6	93.1	94.4	94.9	94.9	95.5	95.8	95.8	96.0	96.0	96.0	96.1
≥ 700	42.6	80.4	87.5	90.6	93.1	93.6	94.8	95.4	95.4	96.0	96.2	96.2	96.5	96.5	96.5	96.6
≥ 600	42.6	80.7	87.8	90.9	93.4	93.9	95.2	95.7	95.7	96.3	96.6	96.6	96.8	96.8	96.8	96.9
≥ 500	42.6	81.1	88.1	91.2	93.8	94.3	95.6	96.1	96.1	96.7	97.0	97.0	97.2	97.2	97.2	97.3
≥ 400	42.6	81.3	88.5	91.6	94.2	94.8	96.3	96.8	96.8	97.5	97.7	97.7	98.0	98.0	98.0	98.1
≥ 300	42.6	81.4	88.6	91.7	94.5	95.1	96.6	97.2	97.3	98.0	98.2	98.2	98.5	98.5	98.5	98.6
≥ 200	42.6	81.4	88.6	91.8	94.6	95.2	96.7	97.3	97.4	98.2	98.6	98.6	98.9	98.9	98.9	99.1
≥ 100	42.6	81.4	88.6	91.8	94.6	95.2	96.7	97.3	97.4	98.2	98.7	98.7	99.2	99.3	99.3	99.5
≥ 0	42.6	81.4	88.6	91.8	94.6	95.2	96.7	97.3	97.4	98.2	98.7	98.7	99.2	99.4	99.4	100.0

TOTAL NUMBER OF OBSERVATIONS 1979

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	24.8	48.0	52.9	56.2	59.0	59.3	60.7	61.8	61.9	62.5	62.6	62.7	62.8	62.8	63.0	63.2
≥ 20000	28.7	54.6	60.5	64.1	67.0	67.5	69.0	70.4	70.6	71.3	71.5	71.5	71.7	71.7	71.9	72.2
≥ 18000	28.8	54.8	60.7	64.3	67.2	67.7	69.2	70.6	70.8	71.5	71.7	71.7	71.9	71.9	72.1	72.4
≥ 16000	28.9	55.1	61.0	64.6	67.6	68.1	69.6	71.0	71.2	71.8	72.0	72.1	72.3	72.3	72.5	72.7
≥ 14000	29.5	56.0	62.2	65.9	68.9	69.4	70.9	72.3	72.5	73.2	73.4	73.5	73.7	73.7	73.9	74.1
≥ 12000	30.8	58.6	65.0	68.8	71.9	72.4	73.9	75.4	75.6	76.3	76.5	76.6	76.8	76.8	77.0	77.3
≥ 10000	32.5	62.3	68.7	73.0	76.1	76.7	78.3	79.7	79.9	80.7	80.9	80.9	81.2	81.2	81.4	81.6
≥ 9000	32.8	63.0	69.8	74.0	77.1	77.7	79.2	80.7	80.9	81.7	81.8	81.9	82.1	82.1	82.3	82.6
≥ 8000	33.2	64.2	71.2	75.6	78.7	79.3	80.9	82.4	82.6	83.4	83.6	83.6	83.9	83.9	84.1	84.3
≥ 7000	33.5	65.4	72.4	76.8	79.9	80.5	82.1	83.6	83.9	84.7	84.8	84.9	85.1	85.1	85.3	85.6
≥ 6000	33.5	65.7	72.7	77.1	80.3	80.9	82.5	84.0	84.3	85.0	85.2	85.3	85.5	85.5	85.7	86.0
≥ 5000	33.9	66.3	73.4	77.8	81.1	81.8	83.4	84.8	85.1	85.9	86.1	86.2	86.4	86.4	86.6	86.9
≥ 4500	33.9	66.3	73.4	77.9	81.2	81.8	83.5	85.0	85.3	86.1	86.3	86.4	86.6	86.6	86.8	87.1
≥ 4000	34.1	66.7	73.9	78.4	81.7	82.3	84.1	85.6	85.9	86.7	86.9	87.0	87.2	87.2	87.4	87.7
≥ 3500	34.1	66.8	74.0	78.6	81.8	82.5	84.2	85.8	86.0	86.8	87.1	87.1	87.4	87.4	87.6	87.8
≥ 3000	34.4	67.5	74.8	79.3	82.6	83.2	85.0	86.6	86.8	87.7	88.0	88.0	88.3	88.3	88.5	88.7
≥ 2500	34.5	67.9	75.4	80.0	83.3	84.0	85.8	87.4	87.6	88.5	88.8	88.9	89.1	89.1	89.3	89.6
≥ 2000	34.7	68.5	76.2	80.8	84.3	84.9	86.7	88.3	88.5	89.5	89.8	89.9	90.1	90.1	90.3	90.6
≥ 1800	34.8	68.7	76.4	81.1	84.6	85.2	87.0	88.6	88.8	89.8	90.1	90.2	90.4	90.4	90.6	90.9
≥ 1500	34.8	68.9	76.7	81.5	85.0	85.7	87.5	89.1	89.4	90.3	90.7	90.7	90.9	90.9	91.1	91.4
≥ 1200	34.9	69.4	77.2	82.0	85.6	86.3	88.0	89.7	89.9	90.9	91.2	91.2	91.5	91.5	91.7	91.9
≥ 1000	34.9	69.8	77.7	82.7	86.4	87.1	88.8	90.5	90.8	91.7	92.0	92.1	92.3	92.3	92.5	92.8
≥ 900	35.0	70.0	78.0	83.0	86.7	87.4	89.1	90.8	91.0	92.0	92.3	92.4	92.6	92.6	92.8	93.1
≥ 800	35.2	70.7	78.7	83.8	87.5	88.1	90.0	91.6	91.9	92.9	93.2	93.3	93.5	93.5	93.7	93.9
≥ 700	35.3	71.2	79.2	84.4	88.1	88.9	90.8	92.4	92.7	93.7	94.0	94.0	94.3	94.3	94.5	94.7
≥ 600	35.3	71.6	79.6	84.8	88.6	89.3	91.3	93.0	93.3	94.3	94.6	94.7	94.9	94.9	95.1	95.4
≥ 500	35.4	72.0	80.2	85.4	89.4	90.3	92.4	94.1	94.5	95.5	95.9	95.9	96.2	96.2	96.4	96.6
≥ 400	35.4	72.2	80.5	85.8	90.0	90.9	93.3	95.1	95.5	96.7	97.0	97.0	97.3	97.3	97.5	97.7
≥ 300	35.5	72.4	80.7	86.1	90.4	91.2	93.7	95.7	96.1	97.4	97.8	97.8	98.1	98.1	98.4	98.6
≥ 200	35.5	72.4	80.8	86.2	90.5	91.3	93.8	95.9	96.3	97.6	98.0	98.1	98.4	98.4	98.8	99.1
≥ 100	35.5	72.4	80.8	86.2	90.5	91.3	93.9	95.9	96.3	97.6	98.1	98.2	98.6	98.7	99.0	99.4
0	35.5	72.4	80.8	86.2	90.5	91.3	93.9	95.9	96.3	97.6	98.1	98.2	98.6	98.7	99.2	100.0

TOTAL NUMBER OF OBSERVATIONS 2033

USAFETAC FORM 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	31.8	49.0	50.6	51.2	51.4	51.5	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6
≥ 20000	37.3	57.5	59.6	60.3	60.6	60.7	60.8	60.9	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0
≥ 18000	37.4	57.6	59.7	60.4	60.7	60.8	60.9	61.0	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1
≥ 16000	37.4	57.7	59.9	60.6	60.9	61.0	61.1	61.2	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 14000	38.4	59.1	61.5	62.1	62.4	62.5	62.6	62.7	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8
≥ 12000	39.8	61.6	64.2	64.8	65.1	65.2	65.3	65.4	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5
≥ 10000	41.8	65.8	68.5	69.2	69.5	69.7	69.8	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 9000	42.3	66.6	69.3	70.0	70.3	70.5	70.6	70.7	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8
≥ 8000	42.9	67.8	70.7	71.4	71.7	71.9	72.0	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 7000	43.1	68.4	71.4	72.1	72.4	72.6	72.7	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 6000	43.1	68.6	71.6	72.3	72.7	72.9	73.0	73.1	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2
≥ 5000	43.3	69.0	72.0	72.8	73.1	73.3	73.4	73.5	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
≥ 4500	43.4	69.3	72.3	73.0	73.4	73.5	73.7	73.8	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 4000	43.9	70.0	73.0	73.7	74.0	74.2	74.4	74.5	74.6	74.6	74.6	74.6	74.6	74.6	74.6	74.6
≥ 3500	44.3	70.7	73.7	74.5	74.9	75.1	75.3	75.4	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 3000	46.3	73.5	76.8	77.6	78.1	78.3	78.5	78.6	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7
≥ 2500	50.7	80.1	83.4	84.2	84.8	85.0	85.2	85.3	85.3	85.3	85.4	85.4	85.4	85.4	85.4	85.4
≥ 2000	52.7	83.8	87.2	88.2	88.8	89.0	89.2	89.3	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 1800	52.9	84.6	87.9	88.9	89.5	89.8	90.0	90.1	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2
≥ 1500	54.1	86.2	89.6	90.8	91.6	91.8	92.0	92.2	92.2	92.2	92.3	92.3	92.3	92.3	92.3	92.3
≥ 1200	55.0	88.2	91.8	93.2	94.1	94.3	94.5	94.6	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 1000	55.4	89.2	93.1	94.4	95.3	95.6	95.8	95.9	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 900	55.5	89.7	93.6	95.0	95.9	96.1	96.3	96.5	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 800	55.5	90.0	93.9	95.4	96.3	96.6	96.8	97.0	97.0	97.0	97.1	97.1	97.1	97.1	97.1	97.1
≥ 700	55.6	90.4	94.3	96.0	96.9	97.1	97.4	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8	97.8
≥ 600	55.6	90.6	94.6	96.3	97.3	97.6	98.0	98.3	98.5	98.5	98.5	98.5	98.6	98.6	98.6	98.6
≥ 500	55.6	90.9	94.9	96.7	97.9	98.2	98.6	98.9	99.2	99.2	99.2	99.2	99.3	99.3	99.3	99.3
≥ 400	55.6	91.0	95.1	96.9	98.1	98.4	98.8	99.2	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 300	55.6	91.0	95.1	96.9	98.1	98.4	98.9	99.3	99.6	99.7	99.8	99.8	99.9	99.9	99.9	99.9
≥ 200	55.6	91.0	95.1	96.9	98.1	98.4	98.9	99.3	99.6	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	55.6	91.0	95.1	96.9	98.1	98.4	98.9	99.3	99.6	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	55.6	91.0	95.1	96.9	98.1	98.4	98.9	99.3	99.6	99.8	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2034

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	30.3	40.5	41.0	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4
≥ 20000	39.3	52.3	52.9	53.3	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4
≥ 18000	39.4	52.5	53.1	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5
≥ 16000	39.7	52.8	53.4	53.8	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9
≥ 14000	41.0	54.7	55.3	55.7	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8
≥ 12000	43.2	57.7	58.4	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8
≥ 10000	44.9	60.7	61.5	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0
≥ 9000	45.2	61.3	62.1	62.5	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6
≥ 8000	45.5	62.0	62.8	63.3	63.3	63.3	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4
≥ 7000	45.6	62.7	63.5	63.9	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0
≥ 6000	45.7	62.8	63.6	64.1	64.1	64.1	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 5000	46.0	63.5	64.3	64.8	64.8	64.8	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
≥ 4500	46.5	63.9	64.8	65.3	65.3	65.3	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4
≥ 4000	47.3	65.0	65.9	66.4	66.5	66.5	66.5	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6
≥ 3500	48.9	68.3	69.2	69.7	69.8	69.8	69.8	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 3000	56.1	78.7	79.7	80.4	80.5	80.5	80.5	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 2500	62.2	88.5	90.0	90.9	91.1	91.1	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 2000	63.8	91.6	93.2	94.2	94.5	94.6	94.8	94.8	94.8	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 1800	63.9	92.1	93.7	94.8	95.1	95.1	95.3	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 1500	64.3	93.3	95.0	96.1	96.6	96.7	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 1200	64.5	93.9	95.6	96.9	97.6	97.6	97.9	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 1000	64.5	94.3	96.0	97.3	98.1	98.1	98.4	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 900	64.5	94.3	96.1	97.4	98.2	98.2	98.5	98.6	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800	64.6	94.5	96.2	97.5	98.4	98.5	98.8	98.9	98.9	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 700	64.6	94.5	96.2	97.5	98.4	98.5	98.8	98.9	98.9	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 600	64.6	94.5	96.4	97.7	98.6	98.7	99.2	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.5	99.5
≥ 500	64.6	94.6	96.5	97.9	98.9	98.9	99.5	99.6	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400	64.6	94.6	96.5	97.9	98.9	98.9	99.5	99.6	99.6	99.8	99.9	99.9	99.9	99.9	100.0	100.0
≥ 300	64.6	94.6	96.5	97.9	98.9	98.9	99.5	99.6	99.6	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 200	64.6	94.6	96.5	97.9	98.9	98.9	99.5	99.6	99.6	99.8	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	64.6	94.6	96.5	97.9	98.9	98.9	99.5	99.6	99.6	99.8	99.9	99.9	100.0	100.0	100.0	100.0
0	64.6	94.6	96.5	97.9	98.9	98.9	99.5	99.6	99.6	99.8	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2022

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	34.5	45.3	45.7	46.0	46.0	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1
≥ 20000	46.7	62.0	62.6	62.9	62.9	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0
≥ 18000	47.0	62.4	63.0	63.3	63.3	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4
≥ 16000	47.2	62.7	63.3	63.6	63.6	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7
≥ 14000	48.4	64.4	65.0	65.3	65.3	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4
≥ 12000	50.2	67.0	67.6	67.9	67.9	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 10000	52.8	71.3	71.9	72.3	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 9000	53.1	71.9	72.6	73.0	73.0	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2
≥ 8000	53.9	73.6	74.4	74.8	74.8	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 7000	54.2	74.5	75.3	75.8	75.9	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0
≥ 6000	54.3	74.9	75.7	76.2	76.3	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 5000	54.6	75.5	76.3	77.0	77.1	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3
≥ 4500	55.1	76.0	76.8	77.4	77.6	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7
≥ 4000	55.6	77.3	78.1	78.7	78.9	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0
≥ 3500	56.8	79.4	80.3	80.9	81.1	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 3000	60.3	85.1	86.4	87.0	87.2	87.4	87.4	87.4	87.4	87.5	87.5	87.5	87.5	87.5	87.5
≥ 2500	63.6	90.7	92.2	92.9	93.2	93.5	93.5	93.5	93.5	93.6	93.6	93.6	93.6	93.6	93.6
≥ 2000	64.6	92.5	94.2	95.1	95.5	95.7	95.7	95.8	95.8	95.9	96.0	96.0	96.0	96.0	96.0
≥ 1800	64.7	92.8	94.6	95.5	95.8	96.0	96.1	96.1	96.1	96.3	96.4	96.4	96.4	96.4	96.4
≥ 1500	64.9	93.6	95.4	96.4	96.8	97.1	97.1	97.2	97.2	97.4	97.5	97.5	97.6	97.6	97.6
≥ 1200	65.0	93.9	95.8	96.8	97.3	97.6	97.7	97.7	97.7	98.0	98.1	98.1	98.1	98.1	98.1
≥ 1000	65.1	94.2	96.2	97.2	97.8	98.1	98.2	98.2	98.2	98.5	98.6	98.6	98.7	98.7	98.7
≥ 900	65.1	94.2	96.2	97.2	97.8	98.1	98.2	98.2	98.2	98.5	98.6	98.6	98.7	98.7	98.7
≥ 800	65.1	94.2	96.3	97.3	97.9	98.2	98.3	98.3	98.3	98.6	98.8	98.8	98.8	98.8	98.9
≥ 700	65.1	94.3	96.4	97.4	98.0	98.3	98.4	98.5	98.5	98.8	98.9	98.9	99.0	99.0	99.0
≥ 600	65.1	94.3	96.4	97.4	98.1	98.4	98.6	98.7	98.7	99.0	99.1	99.1	99.2	99.2	99.3
≥ 500	65.1	94.4	96.5	97.6	98.3	98.6	98.8	98.8	98.8	99.2	99.4	99.4	99.5	99.5	99.6
≥ 400	65.1	94.4	96.5	97.6	98.3	98.6	98.8	98.8	98.8	99.2	99.4	99.4	99.6	99.6	99.6
≥ 300	65.1	94.4	96.5	97.6	98.3	98.6	98.9	98.9	98.9	99.3	99.6	99.6	99.9	99.9	99.9
≥ 200	65.1	94.4	96.5	97.6	98.3	98.6	98.9	98.9	98.9	99.3	99.7	99.7	100.0	100.0	100.0
≥ 100	65.1	94.4	96.5	97.6	98.3	98.6	98.9	98.9	98.9	99.3	99.7	99.7	100.0	100.0	100.0
≥ 0	65.1	94.4	96.5	97.6	98.3	98.6	98.9	98.9	98.9	99.3	99.7	99.7	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2022

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	37.9	49.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2
≥ 20000	51.3	68.0	69.0	69.2	69.2	69.2	69.2	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 18000	51.6	68.4	69.4	69.6	69.6	69.6	69.6	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7
≥ 16000	51.7	68.9	70.0	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2
≥ 14000	53.0	70.9	72.0	72.3	72.3	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4
≥ 12000	55.4	75.0	76.1	76.4	76.4	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 10000	58.6	80.3	81.8	82.2	82.4	82.4	82.5	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 9000	58.9	81.3	82.9	83.4	83.6	83.6	83.7	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8
≥ 8000	60.6	83.9	85.6	86.2	86.4	86.4	86.5	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6
≥ 7000	60.8	84.4	86.3	86.8	87.0	87.0	87.1	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 6000	61.0	84.9	86.8	87.4	87.5	87.6	87.6	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7
≥ 5000	61.1	85.4	87.3	87.8	88.0	88.0	88.1	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 4500	61.2	85.6	87.5	88.0	88.2	88.2	88.3	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4
≥ 4000	61.6	86.7	88.6	89.2	89.4	89.4	89.5	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6
≥ 3500	62.3	88.1	90.0	90.6	90.9	90.9	91.0	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 3000	63.2	89.5	91.7	92.4	92.6	92.8	92.8	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9
≥ 2500	64.1	91.3	93.7	94.5	94.8	95.0	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 2000	64.4	91.9	94.5	95.4	95.7	96.0	96.0	96.1	96.1	96.1	96.1	96.1	96.2	96.2	96.2	96.2
≥ 1800	64.4	92.1	94.8	95.8	96.2	96.4	96.5	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 1500	64.8	93.1	95.8	96.8	97.2	97.5	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1200	65.0	93.5	96.2	97.3	97.8	98.0	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1000	65.0	93.7	96.4	97.5	98.0	98.2	98.4	98.6	98.6	98.6	98.6	98.6	98.7	98.7	98.7	98.7
≥ 900	65.0	93.7	96.4	97.5	98.0	98.2	98.5	98.6	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800	65.0	93.8	96.6	97.6	98.2	98.5	98.8	99.0	99.1	99.1	99.1	99.1	99.2	99.2	99.2	99.2
≥ 700	65.0	93.8	96.7	97.8	98.4	98.7	99.2	99.4	99.5	99.5	99.5	99.5	99.6	99.6	99.6	99.6
≥ 600	65.0	93.9	96.7	97.8	98.5	98.8	99.3	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500	65.0	93.9	96.7	97.9	98.5	98.8	99.4	99.6	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400	65.0	93.9	96.7	97.9	98.5	98.8	99.4	99.6	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 300	65.0	93.9	96.7	97.9	98.5	98.8	99.4	99.7	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 200	65.0	93.9	96.7	97.9	98.5	98.8	99.4	99.7	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	65.0	93.9	96.7	97.9	98.5	98.8	99.4	99.7	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	65.0	93.9	96.7	97.9	98.5	98.8	99.4	99.7	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1957

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	45.4	61.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8
≥ 20000	53.9	75.2	76.4	76.4	76.6	76.7	76.7	76.7	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8
≥ 18000	54.2	75.5	76.7	76.8	76.9	77.0	77.0	77.0	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 16000	54.3	75.7	77.0	77.0	77.2	77.2	77.2	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3
≥ 14000	54.8	76.9	78.2	78.2	78.4	78.4	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 12000	56.8	80.5	81.9	82.1	82.2	82.3	82.3	82.3	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4
≥ 10000	59.4	85.1	86.6	87.0	87.1	87.2	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3
≥ 9000	59.6	85.7	87.4	87.7	87.9	87.9	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0
≥ 8000	60.4	87.6	89.3	89.8	89.9	90.0	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 7000	60.7	88.0	89.8	90.2	90.3	90.4	90.4	90.4	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5
≥ 6000	61.0	88.8	90.5	90.9	91.1	91.1	91.2	91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 5000	61.2	89.3	91.0	91.6	91.7	91.8	91.8	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9
≥ 4500	61.3	89.6	91.3	91.9	92.0	92.1	92.1	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 4000	61.4	90.1	91.9	92.5	92.6	92.7	92.7	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 3500	61.7	90.7	92.5	93.0	93.2	93.2	93.3	93.3	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4
≥ 3000	62.1	91.6	93.4	94.1	94.2	94.3	94.3	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 2500	62.4	92.3	94.3	94.9	95.1	95.2	95.2	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 2000	62.9	93.1	95.1	95.8	96.0	96.0	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 1800	63.1	93.3	95.3	96.1	96.3	96.3	96.4	96.5	96.5	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 1500	63.3	93.9	96.0	96.7	97.0	97.1	97.2	97.2	97.3	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 1200	63.4	94.2	96.3	97.1	97.5	97.6	97.7	97.7	97.9	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 1000	63.5	94.4	96.5	97.4	97.8	97.9	98.0	98.1	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 900	63.5	94.6	96.7	97.5	98.0	98.1	98.2	98.2	98.4	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 800	63.5	94.7	96.8	97.6	98.2	98.2	98.3	98.4	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 700	63.5	94.8	97.0	97.8	98.4	98.4	98.6	98.6	98.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 600	63.5	94.8	97.0	97.9	98.3	98.5	98.7	98.9	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 500	63.6	95.0	97.2	98.1	98.7	98.8	99.0	99.2	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400	63.7	95.1	97.3	98.2	98.8	98.9	99.2	99.4	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300	63.7	95.2	97.5	98.4	99.0	99.1	99.4	99.6	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	63.7	95.2	97.5	98.4	99.0	99.1	99.4	99.6	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	63.7	95.2	97.5	98.4	99.0	99.1	99.4	99.6	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	63.7	95.2	97.5	98.4	99.0	99.1	99.4	99.6	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1953

USAFETAC FORM XL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	31.3	56.2	60.4	62.6	63.7	63.8	64.7	65.0	65.0	65.2	65.5	65.5	65.6	65.6	65.6	65.6
≥ 20000	34.0	62.0	66.4	68.6	69.8	69.9	70.7	71.1	71.1	71.3	71.6	71.6	71.7	71.7	71.7	71.7
≥ 18000	34.1	62.1	66.5	68.7	69.9	70.0	70.9	71.2	71.2	71.4	71.7	71.7	71.8	71.8	71.8	71.8
≥ 16000	34.2	62.2	66.7	68.9	70.0	70.2	71.0	71.4	71.4	71.6	71.8	71.8	71.9	71.9	71.9	71.9
≥ 14000	34.7	63.6	68.0	70.2	71.4	71.5	72.4	72.7	72.7	72.9	73.2	73.2	73.3	73.3	73.3	73.3
≥ 12000	35.8	66.7	71.3	73.6	74.8	74.9	75.8	76.1	76.1	76.4	76.6	76.6	76.8	76.8	76.8	76.8
≥ 10000	37.9	70.1	74.9	77.2	78.4	78.6	79.5	79.8	79.8	80.2	80.4	80.4	80.6	80.6	80.6	80.6
≥ 9000	38.3	70.9	75.7	78.0	79.3	79.4	80.3	80.7	80.7	81.0	81.2	81.2	81.4	81.4	81.4	81.4
≥ 8000	39.1	72.4	77.2	79.6	80.8	81.0	81.9	82.2	82.2	82.5	82.8	82.8	82.9	82.9	82.9	82.9
≥ 7000	39.2	72.8	77.6	80.1	81.3	81.5	82.4	82.7	82.7	83.0	83.3	83.3	83.5	83.5	83.5	83.5
≥ 6000	39.5	73.6	78.5	80.9	82.2	82.4	83.3	83.6	83.6	83.9	84.2	84.2	84.3	84.3	84.3	84.3
≥ 5000	39.7	74.0	78.9	81.4	82.7	82.8	83.7	84.1	84.1	84.4	84.7	84.7	84.8	84.8	84.8	84.8
≥ 4500	39.7	74.1	79.0	81.5	82.8	83.0	83.9	84.3	84.3	84.6	84.9	84.9	85.0	85.0	85.0	85.0
≥ 4000	40.1	75.1	80.1	82.6	83.9	84.1	85.0	85.4	85.4	85.7	85.9	85.9	86.1	86.1	86.1	86.1
≥ 3500	40.4	75.7	80.7	83.2	84.5	84.7	85.6	86.0	86.0	86.4	86.6	86.6	86.8	86.8	86.8	86.8
≥ 3000	40.9	77.0	82.0	84.5	85.9	86.0	86.9	87.4	87.4	87.7	88.0	88.0	88.1	88.1	88.1	88.1
≥ 2500	41.3	78.3	83.5	86.0	87.6	87.8	88.6	89.1	89.1	89.4	89.7	89.7	89.8	89.8	89.8	89.8
≥ 2000	41.6	79.4	84.7	87.4	89.0	89.1	90.1	90.5	90.5	90.9	91.2	91.2	91.3	91.3	91.3	91.3
≥ 1800	41.6	79.5	84.9	87.5	89.1	89.3	90.2	90.7	90.7	91.1	91.3	91.3	91.5	91.5	91.5	91.5
≥ 1500	41.9	80.6	86.0	88.8	90.4	90.6	91.5	92.0	92.0	92.4	92.7	92.7	92.8	92.8	92.8	92.8
≥ 1200	42.5	81.6	87.2	90.1	91.7	91.9	92.8	93.2	93.2	93.6	93.9	93.9	94.1	94.1	94.1	94.1
≥ 1000	42.5	82.0	87.8	90.6	92.3	92.5	93.4	93.9	93.9	94.3	94.6	94.6	94.7	94.7	94.7	94.7
≥ 900	42.6	82.2	88.1	91.0	92.8	93.0	93.9	94.4	94.4	94.8	95.1	95.1	95.2	95.2	95.2	95.2
≥ 800	42.6	82.5	88.4	91.4	93.3	93.4	94.4	94.9	94.9	95.3	95.6	95.6	95.7	95.7	95.7	95.7
≥ 700	42.6	82.9	88.9	92.1	94.0	94.3	95.3	95.8	95.8	96.2	96.5	96.5	96.6	96.6	96.6	96.6
≥ 600	42.6	83.4	89.5	92.8	94.9	95.1	96.2	96.7	96.7	97.1	97.4	97.4	97.5	97.5	97.5	97.5
≥ 500	42.6	83.9	90.0	93.5	95.6	96.0	97.0	97.6	97.6	98.0	98.2	98.2	98.4	98.4	98.4	98.4
≥ 400	42.6	83.9	90.0	93.6	95.8	96.2	97.3	97.8	97.8	98.3	98.6	98.6	98.7	98.7	98.7	98.7
≥ 300	42.6	83.9	90.0	93.7	96.0	96.4	97.5	98.1	98.1	98.7	98.9	98.9	99.1	99.1	99.1	99.1
≥ 200	42.6	84.0	90.1	93.8	96.2	96.5	97.7	98.3	98.3	98.8	99.1	99.1	99.3	99.3	99.3	99.3
≥ 100	42.6	84.0	90.1	93.8	96.2	96.5	97.7	98.3	98.3	98.8	99.1	99.1	99.5	99.5	99.5	99.5
≥ 0	42.6	84.0	90.1	93.8	96.2	96.5	97.7	98.3	98.3	98.8	99.1	99.1	99.5	99.5	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 1935

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 HOURS (L.S.T.)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	21.4	46.6	52.4	56.2	58.4	59.0	60.7	61.4	61.5	62.3	62.9	63.0	63.4	63.5	63.9	64.5
≥ 20000	23.2	50.0	56.2	60.1	62.4	62.9	64.7	65.4	65.5	66.3	67.0	67.0	67.4	67.5	67.9	68.5
≥ 18000	23.2	50.2	56.4	60.3	62.5	63.1	64.9	65.5	65.6	66.5	67.1	67.2	67.6	67.7	68.0	68.7
≥ 16000	23.2	50.2	56.4	60.3	62.5	63.1	64.9	65.5	65.6	66.5	67.1	67.2	67.6	67.7	68.0	68.7
≥ 14000	23.5	50.9	57.1	61.2	63.6	64.1	65.9	66.6	66.7	67.5	68.1	68.2	68.6	68.7	69.1	69.7
≥ 12000	24.5	53.0	59.5	63.7	66.0	66.6	68.4	69.1	69.2	70.0	70.6	70.7	71.1	71.2	71.6	72.2
≥ 10000	25.9	55.4	62.3	66.6	69.0	69.7	71.5	72.1	72.2	73.2	73.9	73.9	74.3	74.4	74.8	75.4
≥ 9000	26.2	56.2	63.1	67.4	69.8	70.5	72.3	72.9	73.0	74.0	74.7	74.7	75.1	75.2	75.6	76.2
≥ 8000	27.2	58.3	65.3	69.6	72.1	72.7	74.5	75.2	75.3	76.3	77.0	77.0	77.4	77.5	77.9	78.5
≥ 7000	27.6	58.8	65.9	70.2	72.7	73.4	75.2	75.9	76.1	77.1	77.8	77.8	78.3	78.4	78.7	79.3
≥ 6000	27.7	59.2	66.5	70.8	73.4	74.0	75.8	76.5	76.7	77.7	78.4	78.5	78.9	79.0	79.3	79.9
≥ 5000	28.0	60.0	67.3	71.6	74.1	74.8	76.6	77.2	77.4	78.5	79.2	79.2	79.6	79.7	80.1	80.7
≥ 4500	28.0	60.2	67.5	71.8	74.4	75.0	76.8	77.5	77.7	78.8	79.4	79.5	79.9	80.0	80.3	81.0
≥ 4000	28.4	61.1	68.5	72.8	75.4	76.1	77.9	78.6	78.8	79.9	80.6	80.6	81.0	81.1	81.5	82.1
≥ 3500	28.9	62.0	69.4	73.7	76.3	77.0	78.8	79.3	79.7	80.8	81.4	81.5	81.9	82.0	82.3	83.0
≥ 3000	29.5	63.1	70.6	74.9	77.6	78.3	80.2	80.9	81.1	82.2	82.8	82.9	83.3	83.4	83.8	84.4
≥ 2500	29.9	64.2	71.8	76.2	78.8	79.5	81.4	82.1	82.3	83.4	84.1	84.1	84.5	84.6	85.0	85.6
≥ 2000	30.4	65.0	72.6	77.2	79.9	80.6	82.6	83.3	83.5	84.6	85.2	85.3	85.7	85.8	86.2	86.8
≥ 1800	30.4	65.2	72.8	77.4	80.1	80.8	82.8	83.6	83.8	84.8	85.5	85.6	86.0	86.1	86.4	87.0
≥ 1500	30.6	66.1	73.8	78.5	81.3	82.0	84.1	84.8	85.0	86.2	86.8	86.9	87.3	87.4	87.7	88.4
≥ 1200	30.7	66.4	74.3	79.2	82.1	82.9	85.1	85.9	86.1	87.2	87.9	87.9	88.3	88.4	88.8	89.4
≥ 1000	30.7	66.8	74.9	79.8	82.8	83.6	85.9	86.6	86.8	87.9	88.6	88.6	89.0	89.1	89.5	90.1
≥ 900	30.7	67.0	75.2	80.1	83.2	84.0	86.3	87.0	87.2	88.3	89.0	89.0	89.4	89.5	89.9	90.5
≥ 800	31.0	67.8	76.1	81.0	84.1	84.8	87.1	87.9	88.1	89.2	89.8	89.9	90.3	90.4	90.8	91.4
≥ 700	31.1	68.5	77.0	82.0	85.0	85.8	88.2	89.0	89.2	90.4	91.0	91.1	91.5	91.6	91.9	92.5
≥ 600	31.2	68.8	77.4	82.4	85.6	86.4	88.7	89.6	89.9	91.1	91.8	91.8	92.2	92.3	92.7	93.3
≥ 500	31.3	69.4	78.2	83.6	86.9	87.8	90.3	91.3	91.6	92.8	93.5	93.5	93.9	94.0	94.4	95.0
≥ 400	31.3	69.6	78.5	84.0	87.4	88.4	90.9	92.0	92.3	93.7	94.3	94.4	94.8	94.9	95.4	96.0
≥ 300	31.4	70.2	79.2	84.7	88.3	89.5	92.2	93.4	93.8	95.3	96.0	96.0	96.4	96.5	97.0	97.8
≥ 200	31.4	70.3	79.3	84.9	88.6	89.6	92.4	93.7	94.0	95.5	96.2	96.3	96.7	96.8	97.3	98.2
≥ 100	31.4	70.3	79.4	84.9	88.7	89.7	92.4	93.8	94.1	95.7	96.4	96.5	97.0	97.1	97.6	98.9
0	31.4	70.3	79.4	84.9	88.7	89.7	92.4	93.8	94.1	95.7	96.4	96.5	97.1	97.2	98.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1959

USAFETAC FORM AK 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (CST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	15.9	33.4	37.7	41.6	45.5	46.0	47.4	48.5	48.5	49.4	49.9	49.9	50.4	50.5	50.7	51.4
≥ 20000	19.0	38.7	43.6	47.8	52.0	52.5	54.1	55.3	55.4	56.4	57.0	57.0	57.8	57.8	58.0	59.0
≥ 18000	19.0	38.9	43.8	48.1	52.2	52.7	54.4	55.6	55.6	56.6	57.3	57.3	58.0	58.1	58.3	59.3
≥ 16000	19.0	39.1	44.0	48.2	52.4	52.9	54.5	55.7	55.8	56.8	57.4	57.5	58.2	58.2	58.5	59.5
≥ 14000	19.5	40.2	45.2	49.5	53.8	54.3	55.9	57.2	57.3	58.3	58.9	59.0	59.7	59.7	60.0	61.1
≥ 12000	20.8	42.8	47.9	52.4	56.8	57.4	59.0	60.3	60.4	61.5	62.1	62.1	62.8	62.9	63.2	64.2
≥ 10000	22.2	45.2	50.6	55.7	60.4	61.1	63.0	64.4	64.4	65.6	66.2	66.3	67.0	67.1	67.5	68.6
≥ 9000	22.7	46.5	51.9	57.0	61.9	62.5	64.4	65.8	65.9	67.0	67.7	67.7	68.5	68.6	69.0	70.0
≥ 8000	23.7	48.2	53.9	59.2	64.1	64.8	66.7	68.3	68.4	69.5	70.2	70.2	71.0	71.0	71.5	72.5
≥ 7000	23.8	48.7	54.4	59.7	64.7	65.4	67.4	69.0	69.1	70.3	70.9	71.0	71.8	71.8	72.2	73.3
≥ 6000	23.9	48.9	54.8	60.1	65.2	65.8	68.0	69.5	69.6	7[illegible]	71.5	71.5	72.3	72.3	72.7	73.8
≥ 5000	24.4	50.0	55.9	61.4	66.4	67.1	69.3	70.9	71.0	72.2	72.9	72.9	73.7	73.7	74.1	75.2
≥ 4500	24.4	50.3	56.2	61.7	66.7	67.4	69.6	71.2	71.3	72.5	73.2	73.2	74.0	74.0	74.4	75.5
≥ 4000	24.6	50.8	56.7	62.1	67.2	67.8	70.1	71.7	71.8	73.0	73.6	73.7	74.4	74.5	74.9	76.0
≥ 3500	24.9	51.5	57.5	63.0	68.1	68.8	71.0	72.7	72.8	73.9	74.6	74.6	75.4	75.5	75.9	76.9
≥ 3000	25.1	51.9	58.1	63.5	68.7	69.4	71.7	73.3	73.4	74.6	75.3	75.3	76.2	76.2	76.6	77.7
≥ 2500	25.2	53.0	59.2	64.8	70.0	70.8	73.1	74.7	74.8	76.0	76.7	76.7	77.6	77.7	78.1	79.2
≥ 2000	25.8	54.3	60.6	66.2	71.6	72.4	74.8	76.3	76.6	77.8	78.4	78.5	79.5	79.5	79.9	81.0
≥ 1800	25.9	54.7	61.1	66.7	72.1	72.9	75.4	77.0	77.1	78.3	79.0	79.0	80.0	80.0	80.4	81.5
≥ 1500	26.3	55.8	62.6	68.2	73.5	74.4	76.8	78.5	78.7	79.9	80.6	80.7	81.6	81.7	82.1	83.2
≥ 1200	26.5	56.7	63.6	69.3	74.8	75.7	78.1	79.9	80.0	81.3	82.0	82.0	83.0	83.1	83.5	84.6
≥ 1000	26.7	57.3	64.4	70.2	75.9	76.8	79.3	81.1	81.2	82.5	83.2	83.3	84.2	84.3	84.7	85.8
≥ 900	26.8	57.7	65.2	71.1	76.8	77.7	80.3	82.0	82.2	83.5	84.2	84.2	85.2	85.2	85.6	86.8
≥ 800	26.9	58.6	66.1	72.3	78.0	79.0	81.5	83.4	83.5	84.8	85.5	85.6	86.6	86.7	87.1	88.2
≥ 700	27.3	59.6	67.3	73.6	79.6	80.5	83.2	85.0	85.1	86.5	87.2	87.2	88.2	88.3	88.7	89.9
≥ 600	27.4	60.3	68.4	74.8	80.9	81.9	84.7	86.7	87.0	88.3	89.0	89.1	90.1	90.2	90.6	91.7
≥ 500	27.5	61.2	69.3	75.9	82.1	83.2	86.4	88.4	88.7	90.1	90.8	90.9	91.9	91.9	92.4	93.6
≥ 400	27.5	61.4	69.8	76.3	82.7	83.9	87.5	89.8	90.0	91.5	92.2	92.3	93.3	93.4	94.1	95.2
≥ 300	27.5	61.8	70.3	77.0	83.6	84.9	88.9	91.2	91.4	93.2	93.9	94.1	95.1	95.2	95.9	97.1
≥ 200	27.5	61.8	70.4	77.1	83.8	85.2	89.3	91.7	91.9	93.8	94.7	94.9	96.0	96.1	96.9	98.2
≥ 100	27.5	61.8	70.5	77.2	83.9	85.3	89.4	91.7	92.0	93.9	94.8	95.0	96.3	96.5	97.2	98.9
0	27.5	61.8	70.5	77.2	83.9	85.3	89.4	91.7	92.0	93.9	94.8	95.0	96.5	96.6	97.4	100.0

TOTAL NUMBER OF OBSERVATIONS 1972

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	21.1	35.6	37.7	38.9	39.4	39.6	39.8	39.8	39.8	39.9	40.0	40.0	40.0	40.0	40.0	40.0
≥ 20000	25.6	42.7	45.2	46.5	47.1	47.2	47.5	47.6	47.6	47.8	47.9	47.9	47.9	47.9	47.9	47.9
≥ 18000	25.8	43.1	45.6	46.9	47.5	47.7	48.0	48.1	48.1	48.3	48.4	48.4	48.4	48.4	48.4	48.4
≥ 16000	25.8	43.2	45.7	47.0	47.6	47.7	48.0	48.2	48.2	48.3	48.4	48.4	48.4	48.4	48.4	48.4
≥ 14000	26.7	44.8	47.6	49.0	49.6	49.7	50.0	50.1	50.1	50.3	50.4	50.4	50.4	50.4	50.4	50.4
≥ 12000	28.4	47.8	50.7	52.3	52.9	53.1	53.4	53.5	53.5	53.6	53.7	53.7	53.7	53.7	53.7	53.7
≥ 10000	29.8	51.0	54.2	56.0	56.6	56.8	57.1	57.2	57.2	57.4	57.5	57.5	57.5	57.5	57.5	57.5
≥ 9000	30.7	52.9	56.2	57.9	58.6	58.7	59.1	59.2	59.2	59.4	59.5	59.5	59.5	59.5	59.5	59.5
≥ 8000	31.4	54.3	57.8	59.7	60.4	60.5	60.9	61.0	61.0	61.1	61.2	61.2	61.2	61.2	61.2	61.2
≥ 7000	31.9	55.2	58.6	60.6	61.2	61.4	61.7	61.8	61.8	62.0	62.1	62.1	62.1	62.1	62.1	62.1
≥ 6000	32.3	55.9	59.4	61.5	62.2	62.3	62.7	62.8	62.8	62.9	63.1	63.1	63.1	63.1	63.1	63.1
≥ 000	32.7	56.6	60.2	62.5	63.2	63.3	63.7	63.8	63.8	63.9	64.0	64.0	64.0	64.0	64.0	64.0
≥ 450	32.9	57.0	60.6	62.8	63.6	63.7	64.1	64.2	64.2	64.3	64.4	64.4	64.4	64.4	64.4	64.4
≥ 4000	33.2	57.4	61.0	63.3	64.0	64.2	64.6	64.7	64.7	64.8	64.9	64.9	64.9	64.9	64.9	64.9
≥ 3500	33.5	58.0	61.7	64.0	64.7	64.9	65.2	65.3	65.3	65.5	65.6	65.6	65.6	65.6	65.6	65.6
≥ 3000	35.2	60.7	64.4	66.9	67.6	67.8	68.1	68.3	68.3	68.4	68.5	68.5	68.5	68.5	68.5	68.5
≥ 2500	38.0	66.1	69.8	72.4	73.1	73.3	73.7	73.8	73.8	74.0	74.1	74.1	74.1	74.1	74.1	74.1
≥ 2000	40.5	70.8	74.7	77.4	78.3	78.5	79.0	79.1	79.1	79.3	79.4	79.4	79.4	79.4	79.4	79.4
≥ 1800	41.3	72.1	76.0	78.7	79.6	79.8	80.3	80.4	80.4	80.6	80.7	80.7	80.7	80.7	80.7	80.7
≥ 1500	42.7	75.4	79.5	82.3	83.2	83.4	83.9	84.1	84.1	84.2	84.3	84.3	84.3	84.3	84.3	84.3
≥ 1200	44.2	79.1	83.4	86.4	87.3	87.5	88.0	88.2	88.2	88.3	88.4	88.4	88.4	88.4	88.4	88.4
≥ 1000	45.1	81.0	85.6	88.7	89.9	90.1	90.6	90.8	90.8	91.0	91.1	91.1	91.1	91.1	91.1	91.1
≥ 900	45.2	82.0	86.6	89.8	90.9	91.2	91.7	91.9	91.9	92.1	92.2	92.2	92.2	92.2	92.2	92.2
≥ 800	45.4	83.3	88.2	91.5	92.8	93.1	93.7	93.9	93.9	94.0	94.1	94.1	94.1	94.1	94.1	94.1
≥ 700	45.6	84.1	89.3	92.6	94.1	94.3	95.0	95.2	95.2	95.3	95.5	95.5	95.5	95.5	95.5	95.5
≥ 600	45.6	84.7	89.9	93.4	95.0	95.4	96.1	96.4	96.4	96.6	96.7	96.7	96.7	96.8	96.8	96.8
≥ 500	45.6	85.0	90.4	94.0	95.8	96.4	97.1	97.4	97.5	97.6	97.9	97.9	97.9	98.0	98.0	98.0
≥ 400	45.6	85.1	90.6	94.2	96.2	96.9	97.7	98.0	98.1	98.2	98.5	98.5	98.5	98.6	98.6	98.6
≥ 300	45.7	85.2	90.7	94.4	96.4	97.2	98.1	98.5	98.6	98.9	99.3	99.3	99.4	99.6	99.6	99.6
≥ 200	45.7	85.2	90.7	94.4	96.4	97.3	98.3	98.7	98.8	99.1	99.5	99.5	99.7	99.8	99.9	99.9
≥ 100	45.7	85.2	90.7	94.4	96.4	97.3	98.3	98.7	98.8	99.1	99.5	99.5	99.7	99.8	99.9	99.9
0	45.7	85.2	90.7	94.4	96.4	97.3	98.3	98.7	98.8	99.1	99.5	99.5	99.7	99.8	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1973

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	23.2	33.8	34.7	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8
≥ 20000	30.0	43.3	44.5	44.6	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7
≥ 18000	30.1	43.4	44.6	44.7	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8
≥ 16000	30.1	43.5	44.7	44.8	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9
≥ 14000	31.3	45.4	46.5	46.6	46.8	46.8	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9
≥ 12000	33.0	48.1	49.2	49.3	49.5	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6
≥ 10000	35.6	52.0	53.3	53.4	53.6	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7
≥ 9000	36.4	53.3	54.6	54.8	55.0	55.0	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1
≥ 8000	37.3	54.9	56.4	56.5	56.7	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8
≥ 7000	38.3	56.1	57.6	57.9	58.1	58.1	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 6000	38.5	56.7	58.2	58.4	58.6	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7
≥ 5000	39.3	57.7	59.3	59.6	59.9	59.9	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
≥ 4500	39.6	58.1	59.8	60.1	60.3	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4
≥ 4000	40.9	59.7	61.3	61.6	61.9	61.9	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0
≥ 3500	42.5	61.9	63.6	64.0	64.2	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3
≥ 3000	48.5	69.1	71.0	71.4	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 2500	54.8	79.4	81.6	82.0	82.3	82.4	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5
≥ 2000	57.9	84.8	87.2	87.9	88.2	88.4	88.5	88.6	88.6	88.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 1800	58.5	85.9	88.4	89.0	89.4	89.5	89.7	89.7	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 1500	59.5	88.3	90.8	91.6	92.0	92.2	92.3	92.4	92.4	92.5	92.5	92.5	92.6	92.6	92.6	92.6
≥ 1200	60.4	90.0	92.6	93.5	93.9	94.1	94.3	94.3	94.4	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 1000	60.8	91.4	94.0	95.0	95.6	95.7	95.9	96.0	96.0	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 900	61.0	92.3	95.1	96.3	97.1	97.3	97.5	97.6	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 800	61.1	92.6	95.4	96.7	97.5	97.7	97.9	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 700	61.1	92.9	95.8	97.2	98.3	98.5	98.7	98.8	98.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 600	61.1	92.9	95.8	97.4	98.5	98.7	99.0	99.0	99.1	99.2	99.2	99.2	99.3	99.3	99.3	99.3
≥ 500	61.1	92.9	95.8	97.5	98.6	98.8	99.3	99.4	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400	61.1	93.0	95.9	97.5	98.7	98.9	99.4	99.5	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300	61.1	93.0	95.9	97.5	98.7	98.9	99.4	99.5	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	61.1	93.0	95.9	97.5	98.7	98.9	99.4	99.5	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100	61.1	93.0	95.9	97.5	98.7	98.9	99.4	99.5	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0
0	61.1	93.0	95.9	97.5	98.7	98.9	99.4	99.5	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1968

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	30.5	40.8	41.6	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7
≥ 20000	41.0	55.2	56.3	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
≥ 18000	41.1	55.3	56.4	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6
≥ 16000	41.3	55.5	56.6	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8	56.8
≥ 14000	42.1	57.5	58.6	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7
≥ 12000	44.1	60.4	61.4	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6
≥ 10000	47.3	65.3	66.6	66.9	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0
≥ 9000	48.2	66.6	68.0	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 8000	49.0	68.2	69.8	70.1	70.2	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 7000	50.0	69.7	71.2	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 6000	50.3	70.3	71.8	72.3	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 5000	51.1	71.3	72.9	73.4	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
≥ 4500	51.5	72.0	73.5	74.0	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 4000	52.2	73.2	74.8	75.3	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 3500	53.2	74.5	76.1	76.6	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8
≥ 3000	55.6	78.3	80.1	80.7	80.8	80.9	80.9	80.9	80.9	80.9	80.9	80.9	80.9	80.9	80.9	80.9
≥ 2500	59.1	84.0	86.3	86.9	87.2	87.3	87.4	87.4	87.4	87.4	87.5	87.5	87.5	87.5	87.5	87.5
≥ 2000	60.2	86.8	89.4	90.2	90.6	90.7	90.8	90.8	90.8	90.8	90.9	90.9	90.9	90.9	90.9	90.9
≥ 1800	60.5	87.7	90.3	91.1	91.6	91.6	91.7	91.7	91.7	91.8	91.8	91.8	91.8	91.8	91.8	91.8
≥ 1500	61.1	89.3	92.1	92.8	93.3	93.4	93.5	93.5	93.5	93.6	93.7	93.7	93.7	93.7	93.7	93.7
≥ 1200	61.3	90.8	93.8	94.6	95.2	95.3	95.5	95.5	95.5	95.6	95.7	95.7	95.7	95.7	95.7	95.7
≥ 1000	61.6	91.6	94.7	95.7	96.4	96.4	96.7	96.7	96.7	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 900	61.6	91.9	95.0	96.1	96.8	96.9	97.2	97.2	97.2	97.4	97.5	97.5	97.5	97.5	97.5	97.5
≥ 800	61.6	92.0	95.3	96.3	97.2	97.3	97.6	97.6	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 700	61.6	92.1	95.5	96.6	97.5	97.6	97.9	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 600	61.6	92.2	95.6	96.8	97.7	97.8	98.2	98.4	98.4	98.6	98.7	98.7	98.7	98.7	98.7	98.7
≥ 500	61.6	92.4	95.9	97.1	98.3	98.4	98.8	99.1	99.1	99.3	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400	61.6	92.4	95.9	97.1	98.3	98.4	98.9	99.2	99.2	99.4	99.5	99.5	99.5	99.5	99.5	99.5
≥ 300	61.6	92.4	95.9	97.2	98.5	98.7	99.2	99.4	99.4	99.7	99.8	99.8	99.9	99.9	100.0	100.0
≥ 200	61.6	92.4	95.9	97.2	98.5	98.7	99.2	99.4	99.4	99.7	99.8	99.8	99.9	99.9	100.0	100.0
≥ 100	61.6	92.4	95.9	97.2	98.5	98.7	99.2	99.4	99.4	99.7	99.8	99.8	99.9	99.9	100.0	100.0
≥ 0	61.6	92.4	95.9	97.2	98.5	98.7	99.2	99.4	99.4	99.7	99.8	99.8	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1968

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NC CEILING	34.4	48.7	49.3	49.6	49.8	49.8	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9
≥ 20000	43.7	63.5	64.5	64.9	65.1	65.1	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2
≥ 18000	44.0	64.0	65.0	65.4	65.6	65.6	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7
≥ 16000	44.2	64.2	65.2	65.6	65.8	65.8	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 14000	45.4	66.2	67.1	67.5	67.8	67.8	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9
≥ 12000	47.4	69.3	70.4	70.9	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 10000	49.9	73.1	74.5	75.1	75.3	75.4	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 9000	50.9	74.5	76.1	76.7	77.0	77.0	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 8000	52.0	77.1	78.8	79.5	79.7	79.8	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 7000	52.7	78.1	80.0	80.6	80.9	80.9	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 6000	53.2	78.9	80.9	81.5	81.7	81.8	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9
≥ 5000	53.7	79.8	81.7	82.4	82.7	82.7	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9
≥ 4500	54.0	80.1	82.1	82.9	83.1	83.2	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3
≥ 4000	54.2	81.1	83.1	83.9	84.2	84.2	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 3500	54.6	81.9	84.0	84.8	85.0	85.1	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2
≥ 3000	55.2	83.6	85.9	86.7	87.0	87.1	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3
≥ 2500	55.9	86.0	88.4	89.5	89.8	89.9	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2
≥ 2000	57.1	87.9	90.7	91.8	92.2	92.3	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6
≥ 1800	57.2	88.2	91.0	92.2	92.6	92.7	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥	57.4	89.4	92.3	93.6	94.2	94.2	94.5	94.6	94.6	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 1200	57.8	90.1	93.3	94.6	95.4	95.5	95.8	95.9	95.9	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1000	57.9	90.6	93.8	95.3	96.1	96.2	96.6	96.7	96.7	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 900	57.9	90.7	94.0	95.4	96.3	96.4	96.8	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 800	57.9	90.9	94.3	95.8	96.7	96.9	97.3	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 700	57.9	91.0	94.6	96.2	97.1	97.3	97.7	98.0	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 600	57.9	91.3	95.0	96.6	97.6	97.8	98.3	98.8	98.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 500	57.9	91.4	95.3	97.1	98.1	98.3	98.9	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400	57.9	91.4	95.4	97.2	98.2	98.3	99.0	99.4	99.4	99.5	99.5	99.5	99.6	99.6	99.6	99.6
≥ 300	57.9	91.4	95.4	97.1	98.2	98.5	99.3	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	57.9	91.4	95.4	97.1	98.2	98.5	99.3	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	57.9	91.4	95.4	97.1	98.2	98.5	99.3	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	57.9	91.4	95.4	97.1	98.2	98.5	99.3	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1938

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	39.6	58.9	61.0	61.5	61.9	61.9	62.0	62.1	62.1	62.1	62.2	62.2	62.2	62.2	62.2	62.2
≥ 20000	43.7	67.0	69.3	70.0	70.3	70.3	70.4	70.5	70.5	70.5	70.6	70.6	70.6	70.6	70.6	70.6
≥ 18000	43.8	67.1	69.4	70.0	70.4	70.4	70.4	70.5	70.5	70.6	70.6	70.6	70.7	70.7	70.7	70.7
≥ 16000	44.0	67.4	69.7	70.3	70.7	70.7	70.7	70.8	70.8	70.9	70.9	70.9	71.0	71.0	71.0	71.0
≥ 14000	44.9	69.0	71.3	72.0	72.3	72.3	72.4	72.5	72.5	72.5	72.6	72.6	72.6	72.6	72.6	72.6
≥ 12000	46.0	71.4	73.8	74.4	74.8	74.8	74.9	75.0	75.0	75.0	75.1	75.1	75.1	75.1	75.1	75.1
≥ 10000	48.4	75.3	77.7	78.4	78.7	78.7	78.8	78.9	78.9	78.9	79.0	79.0	79.0	79.0	79.0	79.0
≥ 9000	48.7	76.2	78.7	79.3	79.7	79.7	79.7	79.8	79.8	79.9	79.9	79.9	80.0	80.0	80.0	80.0
≥ 8000	49.6	78.5	81.0	81.7	82.1	82.1	82.1	82.2	82.2	82.3	82.3	82.3	82.4	82.4	82.4	82.4
≥ 7000	50.1	79.6	82.2	83.0	83.3	83.3	83.4	83.5	83.5	83.5	83.6	83.6	83.6	83.6	83.6	83.6
≥ 6000	50.2	80.2	82.9	83.6	83.9	83.9	84.0	84.1	84.1	84.2	84.2	84.2	84.3	84.3	84.3	84.3
≥ 5000	50.7	81.1	83.8	84.6	85.0	85.0	85.0	85.1	85.1	85.2	85.3	85.3	85.3	85.3	85.3	85.3
≥ 4500	50.8	81.3	84.0	84.8	85.1	85.1	85.2	85.3	85.3	85.4	85.4	85.4	85.5	85.5	85.5	85.5
≥ 4000	51.1	82.0	84.7	85.5	86.0	86.0	86.0	86.2	86.2	86.3	86.3	86.3	86.4	86.4	86.4	86.4
≥ 3500	51.2	82.6	85.3	86.1	86.5	86.5	86.6	86.7	86.7	86.8	86.9	86.9	86.9	86.9	86.9	86.9
≥ 3000	51.6	83.8	86.8	87.7	88.1	88.1	88.2	88.3	88.3	88.4	88.5	88.5	88.5	88.5	88.5	88.5
≥ 2500	52.1	85.3	88.3	89.4	89.9	89.9	90.0	90.1	90.1	90.2	90.3	90.3	90.3	90.3	90.3	90.3
≥ 2000	53.0	87.4	90.6	91.6	92.2	92.2	92.3	92.4	92.4	92.5	92.6	92.6	92.6	92.6	92.6	92.6
≥ 1800	53.0	87.6	90.8	91.9	92.5	92.5	92.6	92.7	92.7	92.8	92.9	92.9	92.9	92.9	92.9	92.9
≥ 1500	53.4	88.6	92.0	93.1	93.8	93.8	93.8	94.0	94.0	94.1	94.1	94.1	94.2	94.2	94.2	94.2
≥ 1200	53.7	89.4	92.8	94.0	94.6	94.6	94.6	94.8	94.8	94.9	94.9	94.9	95.0	95.0	95.0	95.0
≥ 1000	53.8	90.1	93.4	94.6	95.3	95.3	95.4	95.6	95.6	95.7	95.7	95.7	95.8	95.8	95.8	95.8
≥ 900	53.8	90.2	93.8	94.9	95.7	95.7	95.8	96.0	96.0	96.1	96.1	96.1	96.2	96.2	96.2	96.2
≥ 800	53.8	90.6	94.2	95.4	96.2	96.2	96.4	96.5	96.5	96.6	96.7	96.7	96.7	96.7	96.7	96.7
≥ 700	53.8	91.1	94.9	96.2	97.1	97.2	97.4	97.6	97.6	97.7	97.7	97.7	97.8	97.8	97.8	97.8
≥ 600	53.9	91.3	95.3	96.5	97.6	97.6	97.9	98.1	98.1	98.2	98.2	98.2	98.3	98.3	98.3	98.3
≥ 500	53.9	91.7	95.9	97.2	98.2	98.3	98.7	98.9	98.9	99.0	99.1	99.1	99.1	99.1	99.1	99.1
≥ 400	53.9	91.8	96.1	97.4	98.6	98.7	99.0	99.2	99.2	99.4	99.4	99.4	99.5	99.5	99.5	99.5
≥ 300	53.9	91.9	96.1	97.6	98.9	99.0	99.4	99.6	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 200	53.9	91.9	96.1	97.6	98.9	99.0	99.4	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	53.9	91.9	96.1	97.6	98.9	99.0	99.4	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	53.9	91.9	96.1	97.6	98.9	99.0	99.4	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1937

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	28.0	59.1	63.6	65.7	67.9	67.9	68.8	69.2	69.2	70.5	70.7	70.7	71.0	71.1	71.5	71.9
≥ 20000	29.4	62.1	66.8	69.1	71.4	71.4	72.2	72.7	72.7	74.1	74.2	74.2	74.5	74.6	75.0	75.4
≥ 18000	29.5	62.2	66.9	69.2	71.5	71.5	72.3	72.8	72.8	74.2	74.3	74.3	74.6	74.7	75.1	75.5
≥ 16000	29.6	62.3	67.1	69.3	71.6	71.7	72.5	72.9	72.9	74.3	74.5	74.5	74.8	74.9	75.2	75.7
≥ 14000	29.9	62.9	67.7	69.9	72.2	72.2	73.2	73.7	73.7	75.0	75.2	75.2	75.5	75.6	76.0	76.4
≥ 12000	30.4	64.0	68.8	71.0	73.3	73.4	74.4	74.8	74.8	76.2	76.3	76.3	76.6	76.7	77.1	77.6
≥ 10000	30.9	66.1	71.0	73.2	75.8	75.9	76.9	77.3	77.3	78.7	78.8	78.8	79.1	79.2	79.6	80.1
≥ 9000	31.2	66.9	71.9	74.2	76.8	76.9	77.8	78.3	78.3	79.7	79.8	79.8	80.1	80.2	80.6	81.1
≥ 8000	31.8	68.3	73.5	75.8	78.4	78.5	79.5	80.0	80.0	81.3	81.5	81.5	81.8	81.9	82.3	82.8
≥ 7000	32.1	69.1	74.3	76.6	79.3	79.4	80.4	80.8	80.8	82.2	82.3	82.3	82.6	82.7	83.1	83.6
≥ 6000	32.3	69.4	74.7	77.0	79.7	79.8	80.8	81.2	81.2	82.6	82.8	82.8	83.1	83.2	83.5	84.0
≥ 5000	32.5	70.0	75.2	77.6	80.3	80.4	81.4	81.8	81.8	83.2	83.3	83.3	83.6	83.7	84.1	84.6
≥ 4500	32.6	70.3	75.6	77.9	80.6	80.7	81.7	82.2	82.2	83.5	83.7	83.7	84.0	84.1	84.5	85.0
≥ 4000	32.9	71.4	76.7	79.0	81.8	81.9	82.9	83.3	83.3	84.7	84.9	84.9	85.2	85.3	85.7	86.1
≥ 3500	33.1	71.8	77.3	79.6	82.4	82.5	83.5	83.9	83.9	85.3	85.5	85.5	85.8	85.9	86.2	86.7
≥ 3000	33.4	72.7	78.2	80.6	83.4	83.5	84.5	85.0	85.0	86.3	86.5	86.5	86.8	86.9	87.3	87.8
≥ 2500	33.8	73.7	79.4	81.9	84.8	84.9	85.9	86.3	86.3	87.7	87.9	87.9	88.2	88.3	88.7	89.1
≥ 2000	34.1	74.6	80.5	83.0	85.9	86.0	87.1	87.5	87.5	88.9	89.0	89.0	89.3	89.4	89.8	90.3
≥ 1800	34.1	74.8	80.7	83.2	86.1	86.2	87.3	87.8	87.8	89.1	89.3	89.3	89.6	89.7	90.1	90.6
≥ 1500	34.4	75.5	81.5	84.0	87.0	87.2	88.3	88.7	88.7	90.1	90.2	90.2	90.5	90.6	91.0	91.5
≥ 1200	34.5	76.6	82.8	85.5	88.6	88.8	89.8	90.3	90.3	91.7	91.8	91.8	92.1	92.2	92.6	93.1
≥ 1000	34.5	76.8	83.2	85.8	88.9	89.1	90.2	90.7	90.7	92.2	92.3	92.3	92.8	92.9	93.3	93.8
≥ 900	34.6	77.1	83.5	86.2	89.3	89.5	90.6	91.1	91.1	92.6	92.7	92.7	93.2	93.3	93.7	94.2
≥ 800	34.6	77.7	84.1	87.0	90.1	90.3	91.4	91.8	91.9	93.4	93.5	93.5	94.0	94.1	94.4	94.9
≥ 700	34.7	78.2	84.7	87.6	90.8	90.9	92.0	92.5	92.5	94.0	94.2	94.2	94.6	94.7	95.1	95.6
≥ 600	34.8	78.6	85.2	88.1	91.4	91.5	92.6	93.1	93.1	94.6	94.7	94.7	95.2	95.3	95.7	96.2
≥ 500	34.8	78.9	85.5	88.5	91.7	91.9	93.3	93.7	93.8	95.2	95.4	95.4	95.8	95.9	96.3	96.8
≥ 400	34.8	79.0	85.7	88.7	92.1	92.2	93.7	94.3	94.4	95.8	96.0	96.0	96.4	96.5	96.9	97.4
≥ 300	34.8	79.0	85.7	89.1	92.7	92.9	94.4	95.3	95.4	97.0	97.1	97.1	97.5	97.6	98.0	98.5
≥ 200	34.8	79.1	85.9	89.4	93.1	93.3	94.9	95.8	96.0	97.6	97.7	97.7	98.2	98.3	98.7	99.3
≥ 100	34.8	79.1	85.9	89.4	93.1	93.3	95.0	95.9	96.0	97.9	98.1	98.1	98.6	98.7	99.1	99.8
≥ 0	34.8	79.1	85.9	89.4	93.1	93.3	95.0	95.9	96.0	97.9	98.2	98.2	98.7	98.8	99.2	100.0

TOTAL NUMBER OF OBSERVATIONS 2036

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 HOURS (L S T)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING	22.7	51.8	56.3	59.4	62.7	63.3	64.5	64.7	64.9	66.5	66.8	66.8	67.4	67.4	68.6	69.5
≥ 20000	23.3	53.1	57.8	60.9	64.2	64.8	66.1	66.3	66.5	68.1	68.6	68.6	69.2	69.2	70.3	71.3
≥ 18000	23.5	53.4	58.1	61.2	64.5	65.1	66.4	66.6	66.8	68.4	68.9	68.9	69.4	69.5	70.6	71.6
≥ 16000	23.5	53.5	58.3	61.4	64.7	65.3	66.6	66.8	67.0	68.6	69.1	69.1	69.6	69.7	70.8	71.8
≥ 14000	24.0	54.2	58.9	62.0	65.3	65.9	67.2	67.5	67.7	69.4	69.9	69.9	70.4	70.5	71.6	72.6
≥ 12000	24.4	55.1	59.8	63.0	66.3	66.8	68.2	68.4	68.6	70.3	70.8	70.8	71.4	71.4	72.5	73.6
≥ 10000	24.8	57.0	62.1	65.3	68.7	69.3	70.6	70.9	71.1	72.8	73.3	73.3	73.9	73.9	75.0	76.1
≥ 9000	25.0	57.5	62.6	65.8	69.2	69.8	71.1	71.4	71.6	73.3	73.9	73.9	74.4	74.5	75.6	76.7
≥ 8000	25.2	58.3	63.6	66.9	70.4	71.0	72.4	72.7	72.9	74.7	75.2	75.2	75.8	75.8	77.0	78.0
≥ 7000	25.6	59.2	64.5	67.8	71.3	71.9	73.3	73.6	73.8	75.5	76.1	76.1	76.7	76.7	77.8	78.9
≥ 6000	25.8	59.8	65.2	68.5	72.0	72.6	74.0	74.3	74.5	76.2	76.8	76.8	77.4	77.4	78.5	79.6
≥ 5000	26.1	60.6	66.0	69.4	72.8	73.4	74.9	75.2	75.4	77.2	77.8	77.8	78.3	78.3	79.5	80.6
≥ 4500	26.1	60.7	66.2	69.5	72.9	73.6	75.1	75.4	75.6	77.4	77.9	77.9	78.5	78.5	79.7	80.8
≥ 4000	26.4	61.3	66.8	70.2	73.7	74.4	75.8	76.2	76.4	78.1	78.7	78.7	79.3	79.3	80.5	81.6
≥ 3500	26.5	61.7	67.3	70.6	74.1	74.8	76.3	76.6	76.8	78.5	79.2	79.2	79.7	79.8	80.9	82.1
≥ 3000	26.9	62.6	68.3	71.6	75.1	75.8	77.3	77.6	77.8	79.5	80.2	80.2	80.7	80.7	81.9	83.1
≥ 2500	26.9	63.4	69.1	72.4	75.9	76.6	78.1	78.4	78.6	80.4	81.0	81.0	81.5	81.6	82.7	83.9
≥ 2000	27.1	64.0	70.0	73.4	77.2	77.8	79.4	79.8	80.0	81.8	82.4	82.4	83.0	83.0	84.1	85.3
≥ 1800	27.2	64.8	70.8	74.3	78.0	78.7	80.3	80.6	80.8	82.7	83.3	83.3	83.8	83.9	85.0	86.2
≥ 1500	27.4	65.7	71.8	75.3	79.1	79.8	81.4	81.7	81.9	83.7	84.4	84.4	84.9	85.0	86.1	87.3
≥ 1200	27.7	66.8	73.2	76.9	80.9	81.6	83.2	83.5	83.7	85.7	86.3	86.3	86.8	86.9	88.0	89.2
≥ 1000	27.8	67.4	74.0	77.7	82.0	82.7	84.4	84.9	85.1	87.0	87.6	87.6	88.2	88.3	89.4	90.6
≥ 900	27.8	67.7	74.3	78.0	82.4	83.1	84.8	85.2	85.4	87.3	88.0	88.0	88.6	88.6	89.7	90.9
≥ 800	27.8	68.0	74.8	78.7	83.1	83.8	85.6	86.0	86.2	88.1	88.8	88.8	89.3	89.4	90.5	91.7
≥ 700	27.8	68.6	75.4	79.4	84.2	84.9	86.6	87.1	87.3	89.2	89.9	89.9	90.5	90.5	91.7	92.8
≥ 600	27.8	69.4	76.4	80.6	85.4	86.2	88.0	88.4	88.6	90.6	91.2	91.2	91.8	91.8	93.0	94.2
≥ 500	27.8	69.8	77.0	81.2	86.2	87.0	88.9	89.3	89.5	91.5	92.1	92.1	92.7	92.8	93.9	95.2
≥ 400	27.8	70.1	77.6	81.9	87.1	88.0	89.9	90.3	90.7	92.7	93.3	93.3	93.9	94.0	95.1	96.4
≥ 300	27.8	70.2	77.6	82.0	87.0	88.5	90.5	91.3	91.5	93.4	94.1	94.1	94.7	94.7	95.9	97.2
≥ 200	27.9	70.3	77.7	82.3	87.9	88.9	90.9	91.7	91.9	94.1	94.8	94.8	95.4	95.4	96.6	98.1
≥ 100	27.9	70.3	77.7	82.4	88.1	89.0	91.1	91.9	92.1	94.4	95.4	95.5	96.2	96.3	97.5	99.1
≥ 0	27.9	70.3	77.7	82.4	88.1	89.0	91.1	91.9	92.1	94.4	95.4	95.5	96.3	96.3	97.6	100.0

TOTAL NUMBER OF OBSERVATIONS 2036

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	17.6	41.4	46.8	49.9	54.0	54.3	56.1	57.3	57.4	58.6	59.2	59.2	59.7	59.9	60.3	60.8
≥ 20000	18.6	43.7	49.5	52.8	57.1	57.4	59.3	60.4	60.6	61.9	62.5	62.5	63.1	63.3	63.8	64.7
≥ 18000	18.7	43.9	49.7	53.0	57.2	57.6	59.4	60.6	60.8	62.1	62.6	62.6	63.3	63.5	63.9	64.8
≥ 16000	18.7	44.0	49.8	53.1	57.4	57.8	59.6	60.8	61.0	62.2	62.8	62.8	63.5	63.7	64.2	65.1
≥ 14000	19.1	44.6	50.4	53.8	58.2	58.5	60.4	61.6	61.8	63.1	63.8	63.8	64.4	64.6	65.1	66.0
≥ 12000	19.5	45.9	52.2	55.6	60.2	60.5	62.5	63.7	63.9	65.2	65.9	65.9	66.6	66.8	67.3	68.2
≥ 10000	20.4	48.6	55.1	58.7	63.7	64.0	66.0	67.3	67.5	68.8	69.5	69.5	70.2	70.3	70.9	71.9
≥ 9000	20.5	49.6	56.2	59.8	64.9	65.2	67.2	68.4	68.6	70.0	70.6	70.6	71.3	71.5	72.1	73.0
≥ 8000	20.9	51.0	57.7	61.4	66.7	67.0	69.1	70.4	70.6	72.0	72.7	72.7	73.4	73.6	74.2	75.2
≥ 7000	21.1	51.4	58.2	61.9	67.2	67.5	69.7	71.0	71.2	72.6	73.3	73.3	74.0	74.2	74.8	75.8
≥ 6000	21.3	51.8	58.6	62.3	67.6	67.9	70.1	71.4	71.6	73.0	73.7	73.7	74.5	74.7	75.2	76.2
≥ 5000	21.5	52.3	59.1	62.9	68.2	68.5	70.7	72.0	72.2	73.7	74.4	74.4	75.2	75.4	75.9	76.9
≥ 4500	21.6	52.5	59.4	63.1	68.4	68.8	70.9	72.3	72.5	73.9	74.7	74.7	75.5	75.7	76.2	77.2
≥ 4000	22.0	53.1	60.0	63.8	69.2	69.5	71.7	73.0	73.2	74.7	75.5	75.8	76.2	76.4	77.0	78.0
≥ 3500	22.1	53.5	60.5	64.4	69.7	70.2	72.4	73.7	73.9	75.4	76.2	76.2	76.9	77.1	77.7	78.7
≥ 3000	22.3	54.1	61.3	65.2	70.7	71.1	73.3	74.7	74.9	76.4	77.2	77.2	77.9	78.1	78.6	79.7
≥ 2500	22.3	54.9	62.3	66.3	71.8	72.3	74.5	75.8	76.0	77.6	78.4	78.4	79.1	79.3	79.8	80.9
≥ 2000	22.5	55.8	63.3	67.2	72.9	73.4	75.7	77.0	77.2	78.7	79.5	79.5	80.3	80.5	81.0	82.0
≥ 1800	22.6	56.0	63.5	67.5	73.2	73.7	76.0	77.4	77.6	79.1	79.9	79.9	80.6	80.8	81.3	82.4
≥ 1500	22.8	56.5	64.1	68.2	74.1	74.6	76.9	78.3	78.4	80.0	80.8	80.8	81.5	81.7	82.2	83.3
≥ 1200	23.2	57.9	65.5	69.8	75.7	76.3	78.7	80.1	80.3	81.8	82.6	82.6	83.4	83.6	84.1	85.1
≥ 1000	23.3	58.8	66.6	71.0	77.1	77.7	80.2	81.6	81.8	83.4	84.2	84.2	84.9	85.1	85.7	86.7
≥ 900	23.4	59.2	67.1	71.6	77.7	78.3	80.9	82.3	82.5	84.1	84.9	84.9	85.6	85.8	86.4	87.4
≥ 800	23.5	60.3	68.3	73.3	79.6	80.3	82.9	84.3	84.5	86.2	86.9	86.9	87.7	87.9	88.4	89.4
≥ 700	23.5	60.9	69.0	74.4	81.0	81.6	84.3	85.8	86.0	87.7	88.5	88.5	89.2	89.4	89.9	91.0
≥ 600	23.7	61.4	69.8	75.3	82.2	82.9	85.7	87.3	87.5	89.2	89.9	89.9	90.7	90.9	91.4	92.4
≥ 500	23.8	62.2	70.7	76.3	83.5	84.1	87.1	88.8	89.0	90.7	91.6	91.6	92.3	92.5	93.1	94.1
≥ 400	23.8	62.4	71.2	77.1	84.5	85.3	88.3	90.0	90.2	91.9	92.8	92.8	93.7	93.9	94.4	95.4
≥ 300	23.8	62.5	71.4	77.3	84.9	85.7	89.0	90.8	91.1	92.8	93.7	93.7	94.6	94.9	95.5	96.6
≥ 200	23.8	62.5	71.5	77.5	85.2	86.1	89.5	91.5	91.8	93.6	94.8	94.8	95.8	96.1	96.8	98.0
≥ 100	23.8	62.5	71.6	77.5	85.2	86.2	89.5	91.6	91.9	93.7	94.9	94.9	96.0	96.3	97.4	98.9
0	23.8	62.5	71.6	77.5	85.2	86.2	89.5	91.6	91.9	93.8	95.0	95.0	96.1	96.4	97.6	100.0

TOTAL NUMBER OF OBSERVATIONS 2037

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	28.6	50.8	53.5	55.3	56.3	56.4	56.8	57.1	57.1	57.2	57.3	57.3	57.3	57.3	57.3	57.4
≥ 20000	31.5	56.0	59.0	61.0	62.1	62.2	62.8	63.1	63.2	63.4	63.5	63.5	63.5	63.5	63.5	63.6
≥ 18000	31.7	56.3	59.2	61.2	62.3	62.4	63.0	63.4	63.4	63.6	63.7	63.7	63.8	63.8	63.8	63.8
≥ 16000	31.8	56.3	59.3	61.3	62.4	62.5	63.1	63.5	63.5	63.7	63.8	63.8	63.9	63.9	63.9	63.9
≥ 14000	32.1	57.3	60.4	62.5	63.7	63.8	64.4	64.7	64.8	64.9	65.0	65.0	65.1	65.1	65.1	65.1
≥ 12000	32.7	58.8	61.9	64.1	65.3	65.4	66.0	66.3	66.4	66.6	66.7	66.7	66.7	66.7	66.7	66.8
≥ 10000	33.9	61.4	64.9	67.1	68.4	68.5	69.1	69.5	69.5	69.7	69.9	69.9	69.9	69.9	69.9	70.0
≥ 9000	34.3	62.2	65.7	68.0	69.3	69.4	70.1	70.4	70.4	70.6	70.8	70.8	70.8	70.8	70.8	70.9
≥ 8000	34.9	63.9	67.5	69.8	71.1	71.2	71.8	72.2	72.2	72.4	72.6	72.6	72.6	72.6	72.6	72.7
≥ 7000	35.0	64.2	67.8	70.1	71.4	71.5	72.1	72.5	72.6	72.8	72.9	72.9	73.0	73.0	73.0	73.0
≥ 6000	35.2	64.6	68.2	70.5	71.9	72.0	72.6	73.0	73.0	73.2	73.4	73.4	73.4	73.4	73.4	73.5
≥ 5000	35.3	65.0	68.7	71.0	72.4	72.5	73.1	73.5	73.5	73.7	73.9	73.9	73.9	73.9	73.9	74.0
≥ 4500	35.5	65.4	69.2	71.5	72.9	73.0	73.6	74.0	74.0	74.2	74.4	74.4	74.4	74.4	74.4	74.5
≥ 4000	35.7	66.2	70.1	72.5	73.9	74.1	74.8	75.2	75.2	75.4	75.6	75.6	75.6	75.6	75.6	75.7
≥ 3500	36.0	66.7	70.5	73.0	74.5	74.7	75.4	75.8	75.8	76.0	76.2	76.2	76.2	76.2	76.2	76.3
≥ 3000	36.9	68.4	72.3	74.9	76.3	76.5	77.2	77.6	77.7	77.9	78.0	78.0	78.1	78.1	78.1	78.1
≥ 2500	37.8	69.9	73.9	76.6	78.1	78.3	79.0	79.4	79.4	79.6	79.8	79.8	79.8	79.8	79.8	79.9
≥ 2000	38.9	71.6	75.7	78.4	80.0	80.2	80.9	81.2	81.3	81.5	81.6	81.6	81.7	81.7	81.7	81.7
≥ 1800	39.3	72.4	76.5	79.3	80.9	81.1	81.7	82.1	82.2	82.4	82.5	82.5	82.6	82.6	82.6	82.6
≥ 1500	40.4	74.2	78.5	81.3	83.0	83.2	83.8	84.2	84.3	84.5	84.6	84.6	84.7	84.7	84.7	84.7
≥ 1200	41.1	76.6	81.1	84.0	85.7	85.9	86.7	87.1	87.1	87.3	87.5	87.5	87.5	87.5	87.5	87.6
≥ 1000	41.4	78.0	82.8	85.9	87.6	87.9	88.7	89.1	89.2	89.3	89.5	89.5	89.5	89.5	89.5	89.6
≥ 900	41.5	78.8	83.8	86.9	88.8	89.0	89.8	90.2	90.3	90.5	90.6	90.6	90.7	90.7	90.7	90.7
≥ 800	41.8	80.1	85.3	88.5	90.5	90.8	91.7	92.1	92.1	92.3	92.5	92.5	92.5	92.5	92.5	92.6
≥ 700	42.0	80.9	86.4	89.8	92.0	92.4	93.3	93.7	93.8	94.0	94.1	94.1	94.2	94.2	94.2	94.2
≥ 600	42.0	81.2	86.8	90.4	92.7	93.1	94.2	94.6	94.7	95.0	95.1	95.1	95.2	95.2	95.2	95.2
≥ 500	42.0	81.6	87.4	91.1	93.7	94.1	95.4	95.9	96.1	96.5	96.6	96.6	96.7	96.7	96.7	96.8
≥ 400	42.0	81.9	87.8	91.6	94.4	94.8	96.3	97.1	97.3	97.8	98.0	98.0	98.1	98.1	98.1	98.1
≥ 300	42.0	81.9	87.8	91.7	94.7	95.2	97.1	98.0	98.3	99.1	99.3	99.3	99.5	99.5	99.5	99.5
≥ 200	42.0	81.9	87.8	91.7	94.7	95.2	97.1	98.1	98.4	99.3	99.6	99.6	99.8	99.8	99.9	99.9
≥ 100	42.0	81.9	87.8	91.7	94.7	95.2	97.1	98.1	98.4	99.3	99.6	99.6	99.9	99.9	99.9	100.0
≥ 0	42.0	81.9	87.8	91.7	94.7	95.2	97.1	98.1	98.4	99.3	99.6	99.6	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 2037

USAFETAC FORM AA 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	38.7	53.4	54.0	54.1	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2
≥ 20000	43.2	60.4	61.1	61.2	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 18000	43.2	60.4	61.1	61.3	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4
≥ 16000	43.3	60.6	61.2	61.4	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5
≥ 14000	43.9	61.6	62.3	62.5	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6
≥ 12000	45.5	63.9	64.6	64.8	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
≥ 10000	47.8	67.6	68.3	68.6	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7
≥ 9000	48.2	68.2	69.0	69.2	69.3	69.3	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4
≥ 8000	49.0	69.6	70.4	70.7	70.8	70.8	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9
≥ 7000	49.3	70.1	71.0	71.3	71.4	71.4	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5
≥ 6000	49.3	70.4	71.2	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 5000	49.5	70.7	71.6	71.9	72.0	72.0	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 4500	49.7	71.2	72.0	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 4000	50.5	72.5	73.4	73.8	73.9	73.9	74.0	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1
≥ 3500	51.2	73.6	74.5	74.9	75.1	75.1	75.2	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 3000	53.9	77.8	78.8	79.2	79.4	79.5	79.6	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7
≥ 2500	56.8	81.5	82.7	83.2	83.4	83.5	83.5	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 2000	58.2	84.9	86.2	86.8	87.0	87.1	87.2	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3
≥ 1800	58.9	86.1	87.5	88.1	88.4	88.5	88.5	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 1500	59.7	88.5	90.0	90.8	91.1	91.2	91.2	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 1200	60.6	90.6	92.3	93.1	93.6	93.7	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 1000	60.9	91.3	93.3	94.2	94.7	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 900	60.9	91.9	94.1	94.9	95.5	95.6	95.7	95.8	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 800	61.1	92.6	94.8	95.8	96.5	96.6	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 700	61.1	92.8	95.1	96.1	97.0	97.1	97.1	97.3	97.3	97.4	97.5	97.5	97.5	97.5	97.5	97.5
≥ 600	61.1	93.0	95.4	96.5	97.4	97.5	97.7	97.9	97.9	98.1	98.2	98.2	98.2	98.2	98.2	98.2
≥ 500	61.1	93.2	95.9	97.0	98.0	98.1	98.3	98.6	98.7	98.9	98.9	98.9	98.9	98.9	99.0	99.0
≥ 400	61.1	93.3	96.0	97.2	98.2	98.4	98.6	99.0	99.0	99.3	99.4	99.4	99.4	99.4	99.4	99.4
≥ 300	61.1	93.3	96.0	97.2	98.4	98.7	98.9	99.3	99.5	99.8	99.9	99.9	99.9	99.9	100.0	100.0
≥ 200	61.1	93.3	96.0	97.2	98.5	98.7	99.0	99.5	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	61.1	93.3	96.0	97.2	98.5	98.7	99.0	99.5	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	61.1	93.3	96.0	97.2	98.5	98.7	99.0	99.5	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2036

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-1700 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	45.2	58.8	59.0	59.0	59.0	59.0	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 20000	51.3	67.2	67.4	67.4	67.4	67.4	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 18000	51.3	67.3	67.5	67.5	67.5	67.5	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6
≥ 16000	51.3	67.5	67.6	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 14000	51.7	68.3	68.5	68.5	68.5	68.5	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6
≥ 12000	54.5	71.5	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 10000	56.6	75.2	75.5	75.5	75.5	75.5	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6
≥ 9000	57.1	76.2	76.5	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6
≥ 8000	58.2	78.3	78.7	78.7	78.7	78.7	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 7000	58.4	78.8	79.2	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3
≥ 6000	58.7	79.3	79.6	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7
≥ 5000	59.1	79.8	80.2	80.3	80.3	80.3	80.3	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 4500	59.2	79.9	80.3	80.4	80.5	80.5	80.5	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 4000	59.5	80.9	81.3	81.4	81.5	81.5	81.5	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 3500	60.5	82.4	82.7	82.9	83.0	83.0	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 3000	61.8	84.3	84.8	85.0	85.1	85.1	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2
≥ 2500	63.3	86.8	87.4	87.6	87.7	87.7	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8
≥ 2000	64.3	89.3	90.0	90.3	90.5	90.5	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6
≥ 1800	64.5	89.8	90.6	90.8	91.0	91.0	91.1	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 1500	65.1	91.5	92.3	92.6	92.8	92.8	92.9	93.0	93.0	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 1200	65.5	92.9	93.9	94.4	94.8	94.8	94.9	95.0	95.0	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1000	65.6	93.4	94.6	95.3	95.8	95.8	95.9	96.0	96.0	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 900	65.6	94.0	95.2	95.9	96.6	96.6	96.8	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 800	65.6	94.1	95.4	96.2	96.9	97.0	97.1	97.2	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 700	65.6	94.3	95.8	96.6	97.4	97.5	97.7	97.8	97.8	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 600	65.6	94.6	96.2	97.1	97.9	98.1	98.4	98.6	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 500	65.6	94.8	96.6	97.5	98.5	98.6	99.0	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400	65.6	94.8	96.7	97.5	98.6	98.7	99.2	99.4	99.4	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300	65.6	94.8	96.7	97.5	98.6	98.7	99.3	99.6	99.6	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	65.6	94.8	96.7	97.5	98.6	98.7	99.4	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	65.6	94.8	96.7	97.5	98.6	98.7	99.4	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	65.6	94.8	96.7	97.5	98.6	98.7	99.4	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2034

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	43.4	63.2	64.3	64.6	64.6	64.6	64.7	64.9	64.9	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 20000	47.4	69.5	70.7	71.0	71.0	71.0	71.1	71.3	71.3	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 18000	47.6	70.1	71.2	71.5	71.5	71.5	71.6	71.8	71.8	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 16000	47.8	70.3	71.4	71.7	71.7	71.7	71.8	72.0	72.0	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 14000	48.0	70.7	71.8	72.1	72.1	72.1	72.2	72.4	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 12000	49.9	73.0	74.2	74.5	74.5	74.5	74.6	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
≥ 10000	51.5	76.1	77.3	77.7	77.7	77.7	77.8	78.0	78.0	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 9000	51.8	76.8	78.0	78.5	78.5	78.5	78.7	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9
≥ 8000	52.7	78.9	80.1	80.6	80.7	80.7	80.8	81.0	81.0	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 7000	52.9	79.8	81.1	81.6	81.7	81.7	81.8	82.0	82.0	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 6000	53.2	80.5	81.8	82.4	82.4	82.4	82.6	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8
≥ 5000	53.9	81.5	83.0	83.5	83.6	83.6	83.7	83.9	83.9	84.0	84.0	84.0	84.0	84.0	84.0	84.0
≥ 4500	54.3	82.1	83.6	84.1	84.2	84.2	84.3	84.5	84.5	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 4000	54.5	82.9	84.4	84.9	85.0	85.0	85.1	85.3	85.3	85.4	85.4	85.4	85.4	85.4	85.4	85.4
≥ 3500	54.8	83.4	84.9	85.5	85.5	85.6	85.7	85.9	85.9	85.9	85.9	85.9	85.9	85.9	85.9	85.9
≥ 3000	55.4	84.3	85.9	86.5	86.6	86.6	86.8	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0
≥ 2500	56.2	86.6	88.3	88.9	89.0	89.0	89.2	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 2000	56.5	88.2	89.9	90.5	90.6	90.6	90.8	91.0	91.0	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 1800	56.8	89.0	90.7	91.4	91.4	91.5	91.6	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9
≥ 1500	56.8	90.2	92.1	92.9	92.9	93.0	93.2	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 1200	56.9	91.0	93.2	94.1	94.4	94.4	94.7	94.9	94.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 1000	57.1	91.9	94.2	95.1	95.4	95.5	95.7	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 900	57.1	92.4	94.7	95.6	96.0	96.1	96.4	96.6	96.6	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 800	57.1	92.6	94.9	95.8	96.4	96.5	96.8	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 700	57.1	92.9	95.3	96.3	97.0	97.0	97.3	97.6	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 600	57.1	93.0	95.6	96.6	97.3	97.3	97.7	98.0	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 500	57.1	93.1	95.7	96.7	97.6	97.6	98.0	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 400	57.1	93.1	95.8	96.9	97.9	98.0	98.4	99.0	99.0	99.2	99.2	99.2	99.3	99.3	99.3	99.3
≥ 300	57.1	93.1	95.8	96.9	97.9	98.0	98.6	99.3	99.3	99.5	99.5	99.5	99.6	99.6	99.6	99.6
≥ 200	57.1	93.1	95.8	96.9	98.0	98.0	98.7	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100	57.1	93.1	95.8	96.9	98.0	98.0	98.7	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0	57.1	93.1	95.8	96.9	98.0	98.0	98.7	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2035

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	36.7	64.6	67.0	68.5	69.2	69.2	69.5	69.9	69.9	70.2	70.3	70.3	70.3	70.3	70.4	70.5
≥ 20000	39.5	69.1	71.6	73.0	73.8	73.8	74.2	74.5	74.5	74.8	75.0	75.0	75.0	75.0	75.0	75.1
≥ 18000	39.6	69.3	71.8	73.2	74.0	74.0	74.4	74.7	74.7	75.0	75.1	75.1	75.1	75.1	75.2	75.3
≥ 16000	39.7	69.4	71.9	73.3	74.1	74.1	74.5	74.8	74.8	75.1	75.2	75.2	75.2	75.2	75.3	75.4
≥ 14000	40.1	69.9	72.4	73.8	74.6	74.6	75.0	75.3	75.3	75.6	75.8	75.8	75.8	75.8	75.8	75.9
≥ 12000	41.2	71.6	74.1	75.5	76.3	76.3	76.7	77.1	77.1	77.4	77.5	77.5	77.5	77.5	77.6	77.7
≥ 10000	42.4	74.7	77.3	78.8	79.6	79.6	80.0	80.4	80.4	80.6	80.8	80.8	80.8	80.8	80.8	80.9
≥ 9000	42.8	75.5	78.1	79.7	80.5	80.5	80.9	81.2	81.2	81.5	81.7	81.7	81.7	81.7	81.7	81.8
≥ 8000	44.1	77.6	80.2	81.7	82.5	82.5	82.9	83.3	83.3	83.5	83.7	83.7	83.7	83.7	83.7	83.8
≥ 7000	44.4	78.4	81.0	82.6	83.3	83.3	83.8	84.1	84.1	84.4	84.6	84.6	84.6	84.6	84.6	84.7
≥ 6000	44.7	79.0	81.6	83.1	83.9	83.9	84.4	84.7	84.7	85.0	85.2	85.2	85.2	85.2	85.2	85.3
≥ 5000	45.0	79.7	82.3	83.8	84.6	84.6	85.1	85.4	85.4	85.7	85.9	85.9	85.9	85.9	85.9	86.0
≥ 4500	45.4	80.2	82.8	84.3	85.1	85.1	85.6	85.9	85.9	86.2	86.3	86.3	86.3	86.3	86.4	86.5
≥ 4000	45.7	80.9	83.5	85.1	85.9	85.9	86.3	86.7	86.7	87.0	87.1	87.1	87.1	87.1	87.2	87.3
≥ 3500	45.8	81.4	84.2	85.8	86.6	86.6	87.0	87.4	87.4	87.7	87.8	87.8	87.8	87.8	87.9	88.0
≥ 3000	46.1	82.3	85.3	86.8	87.7	87.7	88.1	88.5	88.5	88.8	88.9	88.9	88.9	88.9	88.9	89.0
≥ 2500	46.7	83.5	86.6	88.3	89.1	89.1	89.6	89.9	89.9	90.2	90.4	90.4	90.4	90.4	90.4	90.5
≥ 2000	47.2	85.1	88.3	89.9	90.9	90.9	91.3	91.7	91.7	91.9	92.1	92.1	92.1	92.1	92.1	92.2
≥ 1800	47.4	85.7	88.8	90.4	91.4	91.4	91.8	92.2	92.2	92.5	92.6	92.6	92.6	92.6	92.7	92.8
≥ 1500	47.4	86.1	89.3	91.0	91.9	91.9	92.4	92.8	92.8	93.1	93.2	93.2	93.2	93.2	93.3	93.4
≥ 1200	47.4	86.9	90.2	91.8	92.9	92.9	93.4	93.7	93.7	94.0	94.2	94.2	94.2	94.2	94.2	94.3
≥ 1000	47.5	87.5	90.8	92.5	93.6	93.6	94.1	94.4	94.4	94.7	94.9	94.9	95.0	95.0	95.0	95.1
≥ 900	47.5	87.7	91.1	92.9	94.1	94.1	94.5	94.9	94.9	95.2	95.3	95.3	95.4	95.4	95.5	95.6
≥ 800	47.5	88.1	91.5	93.4	94.5	94.5	95.0	95.4	95.4	95.7	95.9	95.9	96.0	96.0	96.0	96.1
≥ 700	47.5	88.5	92.0	94.0	95.1	95.1	95.6	96.0	96.0	96.3	96.5	96.5	96.6	96.6	96.6	96.7
≥ 600	47.5	88.6	92.4	94.3	95.6	95.6	96.1	96.6	96.6	96.9	97.1	97.1	97.2	97.2	97.2	97.3
≥ 500	47.6	88.8	92.6	94.7	96.4	96.4	97.0	97.4	97.5	97.8	98.0	98.0	98.1	98.1	98.2	98.3
≥ 400	47.6	88.8	92.7	95.0	96.7	96.8	97.3	97.8	97.9	98.3	98.4	98.5	98.6	98.6	98.6	98.7
≥ 300	47.6	88.8	92.7	95.2	97.0	97.1	97.8	98.3	98.4	98.8	98.9	99.0	99.1	99.1	99.1	99.2
≥ 200	47.6	88.8	92.7	95.2	97.1	97.2	98.2	98.9	99.0	99.4	99.5	99.6	99.7	99.7	99.7	99.8
≥ 100	47.6	88.8	92.7	95.2	97.1	97.2	98.2	98.9	99.0	99.5	99.6	99.7	99.8	99.8	99.8	99.9
≥ 0	47.6	88.8	92.7	95.2	97.1	97.2	98.2	98.9	99.0	99.5	99.6	99.7	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 2036

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13882 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING	31.7	34.9	59.6	60.7	61.9	62.3	63.1	63.5	63.6	64.3	64.8	64.8	65.4	65.4	66.0	66.6
≥ 20000	33.8	58.7	62.5	64.7	66.1	66.5	67.3	67.8	67.9	68.7	69.1	69.1	69.7	69.8	70.4	71.0
≥ 18000	33.9	58.8	62.6	64.8	66.2	66.6	67.4	67.9	68.0	68.8	69.2	69.2	69.8	69.9	70.5	71.1
≥ 16000	33.9	58.8	62.6	64.8	66.2	66.6	67.4	67.9	68.0	68.8	69.2	69.2	69.8	69.9	70.5	71.1
≥ 14000	34.3	59.7	63.7	66.0	67.3	67.7	68.5	69.0	69.1	69.9	70.4	70.4	71.0	71.0	71.6	72.2
≥ 12000	35.6	62.1	66.0	68.4	69.7	70.2	71.0	71.5	71.6	72.4	72.8	72.8	73.4	73.5	74.1	74.7
≥ 10000	36.6	64.0	67.9	70.5	71.8	72.2	73.0	73.5	73.6	74.4	74.9	74.9	75.5	75.6	76.2	76.8
≥ 9000	36.9	64.9	68.9	71.5	72.9	73.3	74.1	74.6	74.7	75.6	76.0	76.0	76.6	76.7	77.3	77.9
≥ 8000	37.4	66.2	70.4	73.0	74.4	74.8	75.7	76.2	76.3	77.1	77.5	77.5	78.1	78.2	78.8	79.4
≥ 7000	38.3	68.1	72.4	75.1	76.5	76.9	77.7	78.2	78.3	79.1	79.6	79.6	80.2	80.3	80.9	81.5
≥ 6000	38.6	68.8	73.2	75.9	77.3	77.7	78.5	79.0	79.1	79.9	80.4	80.4	81.0	81.1	81.7	82.3
≥ 5000	39.0	69.6	74.1	76.8	78.2	78.6	79.5	80.1	80.2	81.0	81.4	81.4	82.0	82.1	82.7	83.3
≥ 4500	39.5	70.2	74.6	77.4	78.8	79.2	80.2	80.7	80.8	81.6	82.0	82.0	82.6	82.7	83.3	83.9
≥ 4000	40.1	71.4	76.0	78.9	80.4	80.8	81.8	82.3	82.4	83.2	83.7	83.7	84.3	84.3	84.9	85.6
≥ 3500	40.7	72.5	77.2	80.3	81.7	82.2	83.2	83.7	83.8	84.6	85.1	85.1	85.7	85.7	86.3	86.9
≥ 3000	40.9	73.2	78.0	81.0	82.5	83.0	84.0	84.5	84.6	85.4	85.9	85.9	86.5	86.5	87.1	87.7
≥ 2500	41.4	74.7	79.5	82.6	84.1	84.5	85.6	86.1	86.2	87.0	87.4	87.4	88.0	88.1	88.7	89.3
≥ 2000	41.7	75.7	80.7	83.7	85.2	85.7	86.7	87.2	87.3	88.1	88.5	88.5	89.1	89.2	89.8	90.4
≥ 1800	41.8	76.2	81.2	84.2	85.8	86.2	87.2	87.7	87.8	88.6	89.1	89.1	89.7	89.7	90.4	91.0
≥ 1500	42.0	76.8	81.9	84.9	86.5	86.9	87.9	88.4	88.5	89.4	89.8	89.8	90.5	90.6	91.2	91.8
≥ 1200	42.3	77.0	82.9	86.0	87.6	88.0	89.0	89.5	89.6	90.5	91.0	91.0	91.6	91.7	92.3	92.9
≥ 1000	42.4	78.2	83.5	86.5	88.1	88.6	89.7	90.2	90.3	91.2	91.6	91.6	92.3	92.3	92.9	93.5
≥ 900	42.4	78.5	83.8	86.9	88.5	88.9	90.1	90.6	90.7	91.5	92.0	92.0	92.6	92.7	93.3	93.9
≥ 800	42.4	78.9	84.3	87.4	89.0	89.5	90.7	91.2	91.3	92.2	92.6	92.6	93.3	93.3	93.9	94.5
≥ 700	42.5	79.0	84.6	87.8	89.4	89.9	91.1	91.6	91.7	92.6	93.1	93.1	93.7	93.8	94.4	95.0
600	42.5	79.2	84.8	88.1	89.7	90.3	91.5	92.0	92.2	93.1	93.6	93.6	94.2	94.3	94.9	95.5
500	42.5	79.3	84.9	88.3	90.3	90.9	92.1	92.7	93.0	93.9	94.4	94.4	95.1	95.1	95.7	96.3
≥ 400	42.5	79.4	85.2	88.6	90.7	91.2	92.5	93.1	93.4	94.3	94.8	94.8	95.5	95.6	96.2	96.8
≥ 300	42.5	79.5	85.3	88.8	91.0	91.5	92.9	93.6	93.9	95.1	95.6	95.6	96.3	96.3	96.9	97.5
≥ 200	42.5	79.5	85.3	88.8	91.0	91.6	92.9	93.7	94.0	95.3	95.8	95.8	96.5	96.6	97.3	98.0
≥ 100	42.5	79.5	85.3	88.8	91.1	91.6	93.0	93.9	94.1	95.4	96.1	96.1	96.8	96.9	97.7	98.4
0	42.5	79.5	85.3	88.8	91.1	91.6	93.0	93.8	94.1	95.4	96.1	96.1	96.8	96.9	97.7	100.0

TOTAL NUMBER OF OBSERVATIONS 1980

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (Hr XS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	27.5	51.3	55.6	57.8	59.7	60.2	61.4	62.1	62.3	63.1	63.6	63.7	65.0	65.0	65.5	66.6
≥ 20000	28.4	53.8	58.2	60.5	62.7	63.2	64.5	65.2	65.4	66.2	66.8	66.9	68.3	68.4	68.8	70.0
≥ 18000	28.6	54.0	58.4	60.7	62.9	63.4	64.7	65.4	65.6	66.4	67.0	67.1	68.5	68.6	69.0	70.2
≥ 16000	28.9	54.4	58.9	61.2	63.3	63.9	65.2	65.8	66.0	66.9	67.5	67.5	69.0	69.0	69.5	70.6
≥ 14000	29.4	55.4	59.9	62.4	64.5	65.1	66.4	67.1	67.3	68.1	68.7	68.7	70.2	70.2	70.7	71.9
≥ 12000	30.0	56.9	61.5	64.2	66.3	66.9	68.2	68.9	69.1	69.9	70.5	70.5	72.0	72.1	72.5	73.7
≥ 10000	31.0	58.7	63.4	66.1	68.4	69.0	70.3	70.9	71.1	72.0	72.6	72.6	74.1	74.1	74.6	75.7
≥ 9000	31.2	59.2	64.0	66.9	69.1	69.7	71.0	71.7	71.9	72.7	73.3	73.3	74.8	74.8	75.3	76.5
≥ 8000	31.5	60.4	65.2	68.2	70.5	71.1	72.4	73.1	73.3	74.1	74.7	74.7	76.2	76.3	76.7	77.9
≥ 7000	32.2	62.1	66.9	69.8	72.2	72.7	74.0	74.7	74.9	75.7	76.3	76.4	77.8	77.9	78.3	79.5
≥ 6000	32.7	63.2	68.0	71.1	73.5	74.0	75.3	76.0	76.2	77.0	77.6	77.7	79.1	79.2	79.6	80.8
≥ 5000	33.0	64.0	68.9	72.1	74.5	75.0	76.4	77.0	77.2	78.0	78.6	78.7	80.1	80.2	80.6	81.8
≥ 4500	33.4	64.5	69.4	72.7	75.0	75.6	76.9	77.6	77.8	78.6	79.2	79.2	80.7	80.7	81.2	82.4
≥ 4000	34.1	65.6	70.9	74.3	76.7	77.2	78.5	79.2	79.4	80.2	80.8	80.9	82.4	82.4	82.9	84.0
≥ 3500	34.3	66.3	71.7	75.1	77.6	78.1	79.4	80.1	80.3	81.1	81.8	81.8	83.3	83.3	83.8	84.9
≥ 3000	34.7	67.1	72.5	76.0	78.6	79.1	80.6	81.3	81.5	82.3	82.9	83.0	84.4	84.5	84.9	86.1
≥ 2500	35.0	67.9	73.4	76.9	79.4	80.0	81.6	82.3	82.5	83.3	84.0	84.0	85.5	85.5	86.0	87.2
≥ 2000	35.6	69.0	74.8	78.3	80.9	81.5	83.1	83.8	84.0	84.8	85.5	85.5	87.0	87.1	87.5	88.7
≥ 1800	35.7	69.3	75.1	78.6	81.3	81.8	83.5	84.3	84.5	85.3	86.0	86.0	87.5	87.5	88.0	89.1
≥ 1500	36.0	70.3	76.4	79.9	82.5	83.1	84.7	85.5	85.8	86.6	87.2	87.3	88.7	88.8	89.2	90.4
≥ 1200	36.3	71.0	77.1	80.6	83.2	83.8	85.4	86.3	86.5	87.4	88.0	88.1	89.5	89.6	90.0	91.2
≥ 1000	36.3	71.6	77.7	81.2	83.8	84.4	86.1	86.9	87.1	88.0	88.6	88.7	90.1	90.2	90.7	91.8
≥ 900	36.4	72.1	78.3	81.8	84.4	85.0	86.7	87.6	87.8	88.6	89.3	89.3	90.8	90.9	91.3	92.5
≥ 800	36.5	72.8	79.1	82.7	85.3	85.9	87.6	88.5	88.7	89.5	90.2	90.2	91.7	91.8	92.2	93.4
≥ 700	36.6	73.0	79.4	83.1	85.8	86.3	88.0	88.9	89.1	90.0	90.7	90.7	92.2	92.2	92.7	93.8
≥ 600	36.6	73.2	79.6	83.4	86.1	86.6	88.4	89.3	89.5	90.4	91.1	91.1	92.6	92.6	93.1	94.2
≥ 500	36.6	73.4	79.9	83.8	86.6	87.2	89.1	90.0	90.3	91.2	91.8	91.9	93.3	93.4	93.8	95.0
≥ 400	36.6	73.4	80.0	83.9	86.9	87.6	89.4	90.5	90.8	91.7	92.3	92.4	93.8	93.9	94.3	95.6
≥ 300	36.6	73.5	80.2	84.2	87.5	88.2	90.1	91.3	91.7	92.6	93.3	93.4	94.8	94.9	95.4	96.6
≥ 200	36.6	73.5	80.2	84.2	87.5	88.3	90.3	91.5	91.9	93.0	93.7	93.8	95.4	95.4	95.9	97.1
≥ 100	36.6	73.6	80.3	84.3	87.6	88.4	90.3	91.5	91.9	93.1	93.9	94.0	95.6	95.7	96.4	97.8
≥ 0	36.6	73.6	80.3	84.3	87.6	88.4	90.3	91.5	91.9	93.1	94.0	94.0	95.7	95.7	96.4	100.0

TOTAL NUMBER OF OBSERVATIONS 1979

USAFETAC FORM XUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	21.6	42.4	46.5	49.4	51.7	52.1	53.8	54.7	54.9	56.3	57.2	57.3	58.1	58.3	58.9	59.8
≥ 20000	22.7	45.5	50.1	53.0	55.5	56.1	57.8	58.8	59.0	60.4	61.4	61.5	62.4	62.6	63.3	64.5
≥ 18000	22.8	45.6	50.2	53.1	55.6	56.2	57.9	58.9	59.1	60.5	61.5	61.6	62.5	62.7	63.4	64.6
≥ 16000	23.0	45.9	50.6	53.5	56.0	56.6	58.3	59.3	59.5	61.0	61.9	62.0	62.9	63.1	63.8	65.0
≥ 14000	23.3	46.7	51.6	54.8	57.4	57.9	59.6	60.6	60.8	62.3	63.2	63.4	64.3	64.4	65.1	66.4
≥ 12000	24.1	48.5	53.5	56.8	59.4	60.0	61.8	62.8	63.0	64.4	65.4	65.5	66.4	66.6	67.3	68.5
≥ 10000	24.9	50.5	56.1	59.5	62.4	63.0	64.7	65.8	66.0	67.5	68.4	68.5	69.4	69.6	70.3	71.6
≥ 9000	25.0	51.0	56.7	60.1	63.0	63.6	65.4	66.5	66.7	68.2	69.1	69.2	70.2	70.3	71.0	72.3
≥ 8000	25.5	52.4	58.3	61.9	65.0	65.8	67.6	68.8	69.1	70.6	71.5	71.6	72.5	72.7	73.4	74.7
≥ 7000	25.8	53.5	59.4	63.0	66.2	66.9	68.7	70.1	70.3	71.8	72.7	72.8	73.7	73.9	74.6	76.0
≥ 6000	26.4	54.4	60.5	64.1	67.4	68.2	70.0	71.4	71.6	73.1	74.1	74.3	75.2	75.3	76.0	77.4
≥ 5000	26.9	55.5	61.8	65.4	68.7	69.5	71.4	72.7	73.0	74.6	75.5	75.7	76.6	76.7	77.4	78.9
≥ 4500	27.0	56.0	62.3	65.9	69.3	70.1	71.9	73.3	73.6	75.2	76.1	76.3	77.2	77.3	78.0	79.5
≥ 4000	27.3	56.8	63.0	66.7	70.1	71.0	72.8	74.2	74.5	76.1	77.1	77.2	78.1	78.3	79.0	80.4
≥ 3500	27.6	57.4	63.7	67.6	71.2	72.0	73.8	75.2	75.5	77.2	78.1	78.3	79.2	79.4	80.1	81.5
≥ 3000	28.1	58.8	65.2	69.1	72.7	73.6	75.4	76.8	77.1	78.8	79.7	79.9	80.8	80.9	81.6	83.1
≥ 2500	28.3	59.2	65.8	69.8	73.4	74.4	76.2	77.6	77.9	79.6	80.6	80.7	81.6	81.8	82.5	84.0
≥ 2000	28.7	60.0	66.9	70.9	74.6	75.5	77.4	78.8	79.1	80.9	81.9	82.0	83.0	83.1	83.8	85.3
≥ 1800	28.8	60.3	67.2	71.3	75.0	75.9	77.8	79.3	79.6	81.4	82.4	82.5	83.5	83.6	84.3	85.8
≥ 1500	29.2	61.7	68.9	72.9	76.7	77.6	79.5	81.0	81.3	83.2	84.2	84.3	85.2	85.4	86.1	87.6
≥ 1200	29.6	62.7	70.0	74.1	77.9	78.8	80.7	82.2	82.5	84.4	85.4	85.5	86.4	86.6	87.3	88.8
≥ 1000	29.7	63.4	70.7	74.8	78.7	79.6	81.4	83.0	83.3	85.2	86.2	86.3	87.3	87.4	88.1	89.6
≥ 900	29.8	64.0	71.4	75.5	79.4	80.3	82.2	83.8	84.1	85.9	86.9	87.1	88.0	88.2	88.9	90.3
≥ 800	29.9	64.6	72.1	76.2	80.1	81.1	83.0	84.5	84.8	86.7	87.7	87.9	88.8	88.9	89.6	91.1
≥ 700	30.0	64.9	72.5	76.6	80.6	81.5	83.4	85.0	85.3	87.3	88.3	88.4	89.3	89.5	90.2	91.7
≥ 600	30.0	65.1	72.7	76.9	80.9	81.8	83.8	85.4	85.7	87.7	88.7	88.8	89.7	89.9	90.6	92.1
≥ 500	30.0	65.3	73.1	77.3	81.4	82.3	84.3	86.0	86.3	88.3	89.3	89.5	90.4	90.5	91.3	92.8
≥ 400	30.0	65.4	73.3	77.8	82.1	83.1	85.1	86.9	87.3	89.4	90.5	90.6	91.7	91.8	92.6	94.1
≥ 300	30.0	65.4	73.4	78.0	82.6	83.6	85.8	87.8	88.2	90.6	91.8	92.0	93.0	93.2	94.0	95.5
≥ 200	30.0	65.4	73.4	78.0	82.6	83.6	86.0	88.2	88.5	91.1	92.4	92.6	93.8	94.0	94.8	96.6
≥ 100	30.0	65.4	73.5	78.1	82.7	83.7	86.1	88.3	88.6	91.2	92.7	92.8	94.2	94.4	95.3	97.8
≥ 0	30.0	65.4	73.5	78.1	82.7	83.7	86.1	88.3	88.6	91.2	92.7	92.9	94.4	94.6	95.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1977

USAFETAC FORM JUL 64 0-14-3 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	30.8	52.9	55.7	57.4	59.3	59.5	60.2	60.6	60.8	61.1	61.1	61.1	61.2	61.2	61.2	61.2
≥ 20000	32.5	57.2	60.2	61.9	63.9	64.2	64.8	65.3	65.7	65.9	66.0	66.0	66.1	66.1	66.2	66.2
≥ 18000	32.6	57.4	60.4	62.1	64.1	64.4	65.1	65.5	65.9	66.1	66.2	66.2	66.3	66.3	66.4	66.4
≥ 16000	32.6	57.6	60.7	62.5	64.5	64.8	65.5	65.9	66.3	66.5	66.6	66.6	66.7	66.7	66.8	66.8
≥ 14000	33.1	58.7	62.0	63.8	66.0	66.3	67.0	67.5	67.9	68.2	68.3	68.3	68.4	68.4	68.5	68.5
≥ 12000	33.8	60.7	64.0	65.9	68.1	68.4	69.2	69.7	70.1	70.5	70.6	70.6	70.7	70.7	70.8	70.8
≥ 10000	34.4	62.6	66.4	68.3	70.6	70.9	71.7	72.2	72.5	72.9	73.0	73.0	73.1	73.1	73.2	73.2
≥ 9000	34.7	63.7	67.6	69.5	71.9	72.2	73.0	73.5	73.9	74.2	74.3	74.3	74.4	74.4	74.5	74.5
≥ 8000	35.1	65.0	69.0	71.3	73.8	74.1	74.9	75.5	75.9	76.2	76.3	76.3	76.4	76.4	76.5	76.5
≥ 7000	35.7	66.2	70.5	72.7	75.3	75.6	76.4	77.0	77.3	77.7	77.8	77.8	77.9	77.9	78.0	78.0
≥ 6000	35.9	66.9	71.2	73.4	76.0	76.5	77.3	77.9	78.3	78.6	78.7	78.7	78.8	78.8	78.9	78.9
≥ 5000	36.3	67.7	72.1	74.3	77.0	77.5	78.4	79.0	79.4	79.8	79.9	79.9	80.0	80.0	80.1	80.1
≥ 4500	36.4	68.0	72.5	74.7	77.5	78.0	78.9	79.5	79.9	80.3	80.4	80.4	80.5	80.5	80.6	80.6
≥ 4000	36.5	68.4	73.0	75.3	78.0	78.5	79.4	80.1	80.5	80.9	81.0	81.0	81.1	81.1	81.2	81.2
≥ 3500	37.3	69.6	74.3	76.7	79.5	80.0	81.0	81.7	82.0	82.4	82.5	82.5	82.6	82.6	82.7	82.7
≥ 3000	37.8	70.9	75.6	78.1	80.9	81.4	82.4	83.1	83.4	83.8	83.9	83.9	84.0	84.0	84.1	84.1
≥ 2500	38.4	71.7	76.4	79.1	82.0	82.5	83.5	84.2	84.5	85.0	85.1	85.1	85.2	85.2	85.3	85.3
≥ 2000	39.0	73.4	78.2	80.9	83.7	84.2	85.4	86.1	86.4	86.9	87.0	87.0	87.1	87.1	87.2	87.2
≥ 1800	39.2	73.8	78.6	81.4	84.2	84.7	85.8	86.5	86.9	87.4	87.5	87.5	87.6	87.6	87.7	87.7
≥ 1500	39.6	75.0	79.9	82.8	85.6	86.1	87.3	88.0	88.4	88.8	88.9	88.9	89.0	89.0	89.1	89.1
≥ 1200	40.0	76.2	81.2	84.1	87.1	87.6	88.8	89.5	89.9	90.4	90.5	90.5	90.6	90.6	90.7	90.7
≥ 1000	40.1	77.1	82.3	85.3	88.2	88.7	89.9	90.7	91.1	91.6	91.7	91.7	91.8	91.8	91.9	91.9
≥ 900	40.3	77.4	82.8	86.0	88.9	89.4	90.7	91.5	91.9	92.3	92.4	92.4	92.5	92.5	92.6	92.6
≥ 800	40.4	77.8	83.4	86.8	89.8	90.4	91.7	92.4	92.8	93.3	93.4	93.4	93.5	93.5	93.6	93.6
≥ 700	40.4	78.2	83.9	87.4	90.5	91.1	92.4	93.1	93.5	94.0	94.1	94.1	94.2	94.2	94.3	94.3
≥ 600	40.4	78.3	84.2	87.9	91.1	91.7	93.1	93.9	94.4	94.9	95.1	95.1	95.2	95.2	95.3	95.3
≥ 500	40.5	78.7	84.7	88.4	91.8	92.5	94.0	94.9	95.4	96.1	96.2	96.2	96.3	96.3	96.4	96.4
≥ 400	40.6	79.1	85.1	88.8	92.3	93.1	94.9	96.0	96.5	97.3	97.5	97.5	97.6	97.7	97.8	97.8
≥ 300	40.6	79.1	85.2	89.0	92.5	93.4	95.4	96.7	97.3	98.2	98.5	98.6	98.7	98.8	98.9	99.0
≥ 200	40.6	79.1	85.3	89.1	92.6	93.5	95.5	96.9	97.4	98.4	98.8	98.8	99.1	99.3	99.4	99.5
≥ 100	40.6	79.1	85.3	89.1	92.6	93.5	95.5	96.9	97.4	98.4	98.8	98.8	99.1	99.3	99.5	99.8
≥ 0	40.6	79.1	85.3	89.1	92.6	93.5	95.5	96.9	97.4	98.5	98.8	98.9	99.1	99.3	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 1980

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13024 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	43.8	57.0	57.5	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7
≥ 20000	47.8	64.1	64.5	64.7	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8
≥ 18000	47.8	64.2	64.6	64.8	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
≥ 16000	48.0	64.5	65.0	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2
≥ 14000	49.1	66.2	66.8	67.1	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2
≥ 12000	50.2	68.1	68.7	69.0	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 10000	51.5	70.7	71.3	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 9000	52.3	72.2	72.7	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1
≥ 8000	53.6	74.0	74.6	75.0	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1
≥ 7000	54.2	75.6	76.5	76.9	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 6000	54.8	77.2	78.2	78.6	78.7	78.7	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 5000	55.2	78.2	79.2	79.6	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8
≥ 4500	55.7	79.0	80.1	80.5	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7
≥ 4000	56.0	79.9	81.1	81.6	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8
≥ 3500	57.0	81.5	82.6	83.1	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3
≥ 3000	58.9	84.0	85.2	85.7	85.9	85.9	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 2500	60.1	86.6	87.9	88.5	88.7	88.7	88.8	88.8	88.8	88.8	88.8	88.8	88.8	88.8	88.8	88.8
≥ 2000	61.0	88.5	89.9	90.5	90.7	90.7	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9
≥ 1800	61.2	89.0	90.4	91.0	91.2	91.2	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 1500	61.7	90.4	91.9	92.5	92.8	92.9	93.0	93.0	93.0	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 1200	62.3	91.8	93.3	94.1	94.5	94.6	94.7	94.7	94.7	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 1000	62.4	92.6	94.1	95.1	95.6	95.6	95.8	95.8	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 900	62.4	92.9	94.5	95.5	96.0	96.0	96.3	96.3	96.3	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 800	62.4	93.0	94.6	95.9	96.6	96.7	96.9	97.0	97.0	97.1	97.2	97.2	97.2	97.2	97.2	97.2
≥ 700	62.4	93.4	95.0	96.4	97.2	97.3	97.6	97.7	97.7	97.8	97.9	97.9	97.9	97.9	97.9	97.9
≥ 600	62.4	93.4	95.1	96.5	97.3	97.4	97.8	97.9	98.0	98.1	98.1	98.1	98.2	98.2	98.2	98.2
≥ 500	62.4	93.7	95.5	96.8	97.7	97.9	98.3	98.6	98.7	98.8	98.9	98.9	98.9	98.9	98.9	98.9
≥ 400	62.4	93.7	95.6	97.0	97.9	98.1	98.5	98.8	98.9	99.3	99.4	99.4	99.6	99.6	99.6	99.6
≥ 300	62.4	93.7	95.6	97.0	98.0	98.2	98.7	99.1	99.2	99.6	99.7	99.7	99.9	99.9	99.9	99.9
≥ 200	62.4	93.7	95.6	97.0	98.0	98.2	98.7	99.1	99.3	99.7	99.8	99.8	100.0	100.0	100.0	100.0
≥ 100	62.4	93.7	95.6	97.0	98.0	98.2	98.7	99.1	99.3	99.7	99.8	99.8	100.0	100.0	100.0	100.0
≥ 0	62.4	93.7	95.6	97.0	98.0	98.2	98.7	99.1	99.3	99.7	99.8	99.8	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1979

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	48.6	58.4	58.9	58.9	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0
≥ 20000	54.9	67.8	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 18000	55.2	68.1	68.6	68.6	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7
≥ 16000	55.4	68.5	69.0	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 14000	56.3	70.0	70.5	70.7	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8
≥ 12000	58.0	72.4	72.9	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1
≥ 10000	60.1	75.6	76.1	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 9000	60.6	76.7	77.2	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 8000	62.2	79.0	79.6	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 7000	62.8	80.8	81.6	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9
≥ 6000	63.5	82.5	83.4	83.6	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 5000	63.9	83.5	84.4	84.6	84.7	84.7	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 4500	64.3	84.3	85.3	85.5	85.6	85.6	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
≥ 4000	64.8	85.2	86.1	86.4	86.5	86.5	86.5	86.5	86.6	86.7	86.7	86.7	86.7	86.7	86.7	86.7
≥ 3500	65.7	86.6	87.5	87.7	87.9	87.9	87.9	87.9	88.0	88.1	88.1	88.1	88.1	88.1	88.1	88.1
≥ 3000	66.6	88.2	89.2	89.5	89.6	89.6	89.7	89.7	89.7	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 2500	67.8	90.2	91.2	91.5	91.6	91.6	91.7	91.7	91.7	91.8	91.8	91.8	91.8	91.8	91.8	91.8
≥ 2000	68.3	91.5	92.6	92.9	93.1	93.1	93.2	93.2	93.2	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 1800	68.4	91.9	93.1	93.5	93.6	93.6	93.7	93.7	93.8	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 1500	68.6	92.8	94.2	94.6	94.8	94.8	95.0	95.0	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 1200	68.8	93.3	94.9	95.4	95.6	95.6	95.8	95.8	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1000	68.8	93.4	95.1	95.7	96.0	96.1	96.2	96.2	96.3	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 900	68.9	93.5	95.3	96.0	96.3	96.6	96.7	96.7	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 800	68.9	93.7	95.6	96.3	96.9	97.1	97.2	97.2	97.3	97.4	97.4	97.4	97.5	97.5	97.5	97.5
≥ 700	68.9	94.0	95.9	96.7	97.2	97.5	97.7	97.8	97.8	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 600	68.9	94.1	96.1	96.9	97.5	97.8	98.0	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 500	68.9	94.3	96.3	97.1	97.8	98.1	98.4	98.6	98.7	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 400	68.9	94.4	96.3	97.2	97.9	98.3	98.6	98.8	98.9	99.1	99.1	99.1	99.2	99.2	99.2	99.2
≥ 300	68.9	94.4	96.4	97.2	98.0	98.4	98.9	99.2	99.3	99.7	99.8	99.8	99.9	99.9	99.9	99.9
≥ 200	68.9	94.5	96.4	97.3	98.1	98.4	99.0	99.2	99.3	99.7	99.8	99.8	99.9	99.9	99.9	99.9
≥ 100	68.9	94.5	96.4	97.3	98.1	98.4	99.0	99.2	99.3	99.8	99.9	99.9	100.0	100.0	100.0	100.0
0	68.9	94.5	96.4	97.3	98.1	98.4	99.0	99.2	99.3	99.8	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1980

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	45.2	62.8	64.0	64.7	64.9	64.9	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
≥ 20000	48.7	69.2	70.6	71.4	71.6	71.6	71.7	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8
≥ 18000	48.8	69.4	70.7	71.5	71.8	71.8	71.9	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0
≥ 16000	49.0	69.5	70.9	71.7	71.9	71.9	72.0	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 14000	49.7	70.7	72.0	72.9	73.1	73.1	73.2	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 12000	50.9	72.8	74.1	75.1	75.4	75.4	75.5	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6
≥ 10000	52.4	75.7	77.0	78.0	78.2	78.2	78.3	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 9000	52.9	77.1	78.5	79.5	79.7	79.7	79.8	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 8000	53.7	78.6	80.2	81.1	81.4	81.4	81.5	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 7000	54.7	80.3	81.8	82.8	83.0	83.0	83.1	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2
≥ 6000	55.1	81.3	82.8	83.8	84.1	84.1	84.2	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3
≥ 5000	55.4	82.6	84.1	85.2	85.5	85.5	85.6	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
≥ 4500	56.0	83.3	85.0	86.1	86.3	86.3	86.4	86.5	86.5	86.6	86.6	86.6	86.6	86.6	86.6	86.6
≥ 4000	56.6	84.3	86.0	87.1	87.3	87.3	87.4	87.5	87.5	87.6	87.6	87.6	87.6	87.6	87.6	87.6
≥ 3500	57.2	85.3	87.1	88.2	88.5	88.5	88.6	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 3000	57.5	86.5	88.5	89.8	90.1	90.1	90.2	90.3	90.3	90.4	90.4	90.4	90.4	90.4	90.4	90.4
≥ 2500	58.1	87.8	89.8	91.2	91.5	91.5	91.6	91.7	91.7	91.8	91.8	91.8	91.8	91.8	91.8	91.8
≥ 2000	58.4	89.0	91.2	92.7	92.9	93.0	93.1	93.2	93.2	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 1800	58.6	89.5	92.0	93.5	93.8	93.9	94.0	94.1	94.1	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 1500	58.8	90.2	92.8	94.3	94.6	94.7	94.9	95.0	95.0	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1200	58.9	90.9	93.5	95.1	95.4	95.5	95.7	95.8	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1000	58.9	91.2	93.9	95.5	95.8	95.9	96.1	96.2	96.2	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 900	58.9	91.3	94.1	95.7	96.1	96.2	96.4	96.5	96.5	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 800	58.9	91.4	94.2	95.9	96.3	96.5	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 700	58.9	91.4	94.3	96.0	96.4	96.6	96.8	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 600	59.0	91.6	94.5	96.3	96.7	96.9	97.1	97.2	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 500	59.0	91.9	94.9	96.6	97.2	97.4	97.7	97.8	97.8	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 400	59.0	92.0	94.9	96.7	97.5	97.7	98.1	98.3	98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 300	59.0	92.0	94.9	96.8	97.7	97.9	98.5	98.8	98.8	99.1	99.1	99.1	99.2	99.2	99.2	99.2
≥ 200	59.0	92.0	94.9	96.8	97.7	97.9	98.5	98.8	98.8	99.1	99.2	99.2	99.2	99.2	99.2	99.2
≥ 100	59.0	92.0	94.9	96.8	97.7	97.9	98.5	98.8	98.9	99.2	99.5	99.5	99.5	99.5	99.6	99.7
≥ 0	59.0	92.0	94.9	96.8	97.7	97.9	98.5	98.8	98.9	99.2	99.5	99.5	99.5	99.5	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 1980

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	≥0
NO CEILING	40.1	62.8	64.8	66.0	67.0	67.0	67.4	67.7	67.7	67.8	67.9	67.9	68.0	68.0	68.0	68.2
≥ 20000	42.8	67.3	69.4	70.9	71.9	71.9	72.3	72.6	72.6	72.7	72.8	72.8	72.9	72.9	72.9	73.1
≥ 18000	42.8	67.5	69.6	71.1	72.1	72.1	72.5	72.8	72.8	72.9	73.0	73.0	73.1	73.1	73.1	73.3
≥ 16000	42.8	67.5	69.6	71.2	72.2	72.2	72.6	72.9	72.9	73.0	73.1	73.1	73.2	73.2	73.2	73.4
≥ 14000	43.4	68.7	70.9	72.4	73.4	73.4	73.8	74.1	74.1	74.3	74.3	74.3	74.4	74.4	74.5	74.7
≥ 12000	44.4	70.7	72.9	74.5	75.5	75.5	75.9	76.2	76.2	76.4	76.4	76.4	76.5	76.5	76.6	76.8
≥ 10000	45.6	73.2	75.5	77.1	78.1	78.1	78.5	78.8	78.8	78.9	79.0	79.0	79.1	79.1	79.1	79.3
≥ 9000	46.0	74.2	76.5	78.0	79.0	79.0	79.4	79.7	79.7	79.9	79.9	79.9	80.1	80.1	80.1	80.3
≥ 8000	46.9	76.1	78.6	80.2	81.2	81.2	81.6	81.9	81.9	82.0	82.1	82.1	82.2	82.2	82.2	82.4
≥ 7000	47.5	77.6	80.2	81.8	82.8	82.8	83.2	83.5	83.5	83.6	83.7	83.7	83.8	83.8	83.8	84.0
≥ 6000	47.9	78.2	80.8	82.4	83.4	83.4	83.8	84.1	84.1	84.2	84.3	84.3	84.4	84.4	84.4	84.6
≥ 5000	48.1	79.3	82.0	83.6	84.7	84.7	85.3	85.6	85.6	85.7	85.8	85.8	85.9	85.9	85.9	86.1
≥ 4500	48.3	79.5	82.4	84.1	85.2	85.2	85.7	86.0	86.0	86.2	86.2	86.2	86.3	86.3	86.4	86.6
≥ 4000	48.6	80.8	83.4	85.2	86.3	86.3	86.8	87.1	87.1	87.3	87.3	87.3	87.4	87.4	87.5	87.7
≥ 3500	48.9	81.4	84.0	85.9	87.0	87.0	87.6	87.9	87.9	88.1	88.2	88.2	88.3	88.3	88.3	88.5
≥ 3000	49.0	82.3	85.0	86.9	88.1	88.1	88.7	89.0	89.0	89.2	89.3	89.3	89.4	89.4	89.4	89.6
≥ 2500	49.5	83.5	86.3	88.2	89.5	89.5	90.2	90.5	90.5	90.7	90.7	90.7	90.8	90.8	90.9	91.1
≥ 2000	49.7	84.4	87.3	89.2	90.6	90.6	91.3	91.6	91.6	91.9	91.9	91.9	92.0	92.0	92.1	92.3
≥ 1800	49.8	85.0	87.9	89.8	91.1	91.2	91.8	92.1	92.2	92.5	92.5	92.5	92.6	92.6	92.7	92.9
≥ 1500	50.0	85.8	88.7	90.7	92.0	92.1	92.7	93.0	93.1	93.4	93.4	93.4	93.5	93.5	93.6	93.8
≥ 1200	50.3	86.6	89.5	91.5	92.8	92.9	93.5	93.8	93.9	94.2	94.2	94.2	94.3	94.3	94.4	94.6
≥ 1000	50.3	86.9	89.9	91.9	93.2	93.3	93.9	94.2	94.3	94.6	94.6	94.6	94.7	94.7	94.8	95.0
≥ 900	50.4	87.4	90.4	92.4	93.7	93.8	94.4	94.7	94.8	95.1	95.2	95.2	95.3	95.3	95.3	95.5
≥ 800	50.4	87.5	90.5	92.6	94.0	94.1	94.7	95.1	95.1	95.4	95.5	95.5	95.6	95.6	95.6	95.8
≥ 700	50.4	87.7	90.9	93.0	94.4	94.5	95.2	95.5	95.5	95.8	95.9	95.9	96.0	96.0	96.0	96.2
≥ 600	50.4	87.9	91.2	93.4	94.8	94.9	95.6	96.0	96.0	96.3	96.4	96.4	96.5	96.5	96.5	96.7
≥ 500	50.4	87.9	91.4	93.5	95.3	95.4	96.1	96.5	96.6	96.9	96.9	96.9	97.0	97.0	97.1	97.3
≥ 400	50.5	88.1	91.6	93.9	95.9	96.0	96.7	97.1	97.2	97.5	97.6	97.6	97.7	97.7	97.7	97.9
≥ 300	50.5	88.1	91.7	94.1	96.4	96.5	97.3	97.9	97.9	98.3	98.3	98.3	98.4	98.4	98.5	98.7
≥ 200	50.5	88.1	91.7	94.1	96.4	96.5	97.3	97.9	98.0	98.3	98.4	98.4	98.5	98.5	98.7	98.9
≥ 100	50.5	88.1	91.7	94.1	96.4	96.5	97.4	98.0	98.0	98.4	98.5	98.5	98.6	98.6	98.8	99.1
≥ 0	50.5	88.1	91.7	94.1	96.4	96.5	97.4	98.0	98.0	98.4	98.5	98.5	98.6	98.6	98.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1980

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	32.4	52.6	54.9	56.1	57.5	57.5	58.1	58.5	58.6	59.4	59.6	59.6	60.0	60.0	60.5	60.9
≥ 20000	34.3	56.9	59.5	60.6	62.0	62.0	62.6	63.1	63.2	64.0	64.2	64.2	64.6	64.6	65.1	65.5
≥ 18000	34.4	57.0	59.5	60.7	62.1	62.1	62.7	63.2	63.3	64.1	64.3	64.3	64.7	64.7	65.2	65.6
≥ 16000	34.4	57.1	59.6	60.8	62.2	62.2	62.8	63.2	63.3	64.1	64.3	64.3	64.8	64.8	65.2	65.7
≥ 14000	34.8	57.6	60.3	61.5	62.9	62.9	63.6	64.1	64.2	65.0	65.2	65.2	65.7	65.7	66.1	66.6
≥ 12000	35.7	59.3	62.0	63.3	64.7	64.7	65.4	65.9	66.0	66.8	67.1	67.1	67.5	67.5	68.0	68.4
≥ 10000	36.6	61.0	64.0	65.2	66.7	66.7	67.4	67.9	68.0	68.9	69.1	69.1	69.5	69.5	70.0	70.4
≥ 9000	36.8	61.9	64.8	66.1	67.6	67.6	68.3	68.8	68.9	69.7	70.0	70.0	70.4	70.4	70.9	71.3
≥ 8000	37.5	63.9	66.9	68.4	70.0	70.0	70.7	71.2	71.3	72.1	72.3	72.3	72.8	72.8	73.2	73.7
≥ 7000	38.3	65.6	68.7	70.1	71.7	71.7	72.4	72.9	73.0	73.8	74.1	74.1	74.5	74.5	75.0	75.4
≥ 6000	39.4	67.8	70.9	72.3	74.0	74.0	74.7	75.2	75.3	76.2	76.4	76.4	76.8	76.8	77.3	77.7
≥ 5000	39.8	69.1	72.4	74.0	75.8	75.8	76.5	77.0	77.1	78.0	78.2	78.2	78.6	78.6	79.1	79.5
≥ 4500	40.2	70.2	73.5	75.2	76.9	76.9	77.7	78.2	78.3	79.1	79.4	79.4	79.8	79.8	80.3	80.7
≥ 4000	40.9	71.4	74.8	76.5	78.3	78.3	79.0	79.5	79.6	80.5	80.8	80.8	81.2	81.2	81.6	82.1
≥ 3500	41.3	72.4	75.9	77.7	79.4	79.4	80.2	80.7	80.8	81.6	81.9	81.9	82.3	82.3	82.8	83.3
≥ 3000	42.0	73.8	77.4	79.2	81.0	81.0	81.7	82.2	82.3	83.2	83.4	83.4	83.8	83.8	84.3	84.8
≥ 2500	42.4	74.9	78.6	80.5	82.3	82.3	83.0	83.5	83.6	84.5	84.7	84.7	85.2	85.2	85.6	86.1
≥ 2000	42.9	75.8	79.5	81.5	83.3	83.3	84.0	84.5	84.6	85.5	85.7	85.7	86.2	86.2	86.6	87.1
≥ 1800	43.0	76.2	79.9	82.0	83.7	83.7	84.5	85.0	85.1	85.9	86.2	86.2	86.6	86.6	87.1	87.6
≥ 1500	43.0	76.7	80.6	82.7	84.5	84.5	85.3	85.8	85.9	86.9	87.1	87.1	87.6	87.6	88.0	88.5
≥ 1200	43.2	77.9	81.9	84.0	85.8	85.8	86.6	87.2	87.3	88.2	88.4	88.4	88.9	88.9	89.3	89.8
≥ 1000	43.2	78.5	82.5	84.6	86.4	86.4	87.2	87.8	87.9	88.8	89.0	89.0	89.5	89.5	89.9	90.4
≥ 900	43.3	79.0	83.1	85.2	87.0	87.0	87.8	88.3	88.4	89.4	89.6	89.6	90.1	90.1	90.5	91.0
≥ 800	43.3	79.7	83.8	85.9	87.7	87.7	88.9	89.1	89.2	90.1	90.4	90.4	90.8	90.8	91.2	91.7
≥ 700	43.3	80.0	84.1	86.3	88.1	88.1	88.9	89.5	89.6	90.5	90.7	90.7	91.2	91.2	91.6	92.1
≥ 600	43.3	80.4	84.8	87.1	88.9	88.9	89.8	90.4	90.5	91.5	91.7	91.7	92.2	92.2	92.6	93.1
≥ 500	43.5	80.9	85.5	87.8	89.8	89.8	90.7	91.4	91.5	92.5	92.7	92.7	93.1	93.1	93.6	94.1
≥ 400	43.5	81.0	85.7	88.1	90.1	90.2	91.3	92.1	92.3	93.3	93.5	93.5	94.0	94.0	94.4	94.9
≥ 300	43.5	81.2	85.9	88.5	90.6	90.8	91.9	92.8	92.9	94.1	94.4	94.4	95.0	95.0	95.4	95.9
≥ 200	43.5	81.3	86.1	88.7	90.9	91.0	92.4	93.3	93.5	94.7	95.1	95.1	95.9	95.9	96.4	97.1
≥ 100	43.5	81.3	86.1	88.8	91.0	91.1	92.5	93.4	93.6	94.9	95.3	95.3	96.3	96.3	97.1	97.9
≥ 0	43.5	81.3	86.1	88.8	91.0	91.1	92.5	93.4	93.6	94.9	95.3	95.3	96.4	96.6	97.7	100.0

TOTAL NUMBER OF OBSERVATIONS 2042

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS (L.S.T.))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING	29.1	49.4	52.2	53.0	54.3	54.3	55.0	55.6	55.7	56.1	56.5	56.6	57.3	57.3	57.8	58.5
≥ 20000	30.7	53.3	56.2	57.0	58.3	58.4	59.2	59.7	59.8	60.3	60.7	60.8	61.4	61.4	62.0	62.7
≥ 18000	31.1	53.8	56.8	57.6	58.9	59.0	59.8	60.3	60.4	60.9	61.3	61.4	62.0	62.0	62.6	63.2
≥ 16000	31.1	53.9	56.9	57.7	59.0	59.1	59.8	60.4	60.5	60.9	61.3	61.4	62.1	62.1	62.6	63.3
≥ 14000	31.4	54.6	57.6	58.6	59.9	60.0	60.8	61.3	61.4	61.9	62.3	62.4	63.0	63.0	63.6	64.3
≥ 12000	32.2	55.7	58.7	59.9	61.4	61.5	62.3	62.8	62.9	63.4	63.8	63.9	64.5	64.5	65.1	65.7
≥ 10000	32.8	57.6	60.8	62.1	63.5	63.6	64.4	65.0	65.1	65.5	65.9	66.0	66.7	66.7	67.2	67.9
≥ 9000	32.9	58.4	61.8	63.1	64.6	64.7	65.4	66.0	66.1	66.6	67.0	67.1	67.7	67.7	68.3	69.0
≥ 8000	33.6	60.1	63.6	65.1	66.6	66.7	67.5	68.0	68.1	68.7	69.1	69.2	69.8	69.8	70.4	71.1
≥ 7000	34.5	62.0	65.5	67.0	68.6	68.7	69.5	70.0	70.1	70.7	71.1	71.2	71.9	71.9	72.4	73.1
≥ 6000	35.0	64.1	67.6	69.2	70.8	70.9	71.7	72.2	72.3	72.9	73.3	73.4	74.0	74.0	74.5	75.2
≥ 5000	35.5	65.7	69.4	71.0	72.8	72.9	73.7	74.2	74.3	74.9	75.3	75.4	76.0	76.1	76.6	77.3
≥ 4500	36.0	66.4	70.1	71.7	73.6	73.7	74.5	75.0	75.1	75.7	76.1	76.2	76.8	76.9	77.4	78.1
≥ 4000	36.8	67.8	71.6	73.3	75.2	75.4	76.2	76.7	76.8	77.4	77.8	77.9	78.6	78.7	79.2	79.9
≥ 3500	37.8	69.8	73.7	75.5	77.4	77.6	78.4	79.0	79.1	79.6	80.0	80.1	80.8	80.9	81.4	82.1
≥ 3000	38.1	71.5	75.5	77.3	79.2	79.4	80.2	80.8	80.9	81.4	81.8	81.9	82.6	82.7	83.2	83.9
≥ 2500	38.4	72.1	76.1	78.0	79.9	80.1	81.0	81.5	81.6	82.2	82.6	82.7	83.4	83.4	83.9	84.6
≥ 2000	38.9	73.4	77.4	79.4	81.4	81.6	82.5	83.0	83.1	83.7	84.1	84.2	85.0	85.0	85.6	86.2
≥ 1800	38.9	73.7	77.7	79.7	81.6	81.8	82.8	83.3	83.4	84.0	84.4	84.5	85.3	85.3	85.9	86.5
≥ 1500	39.3	74.5	78.6	80.6	82.6	82.8	83.8	84.4	84.5	85.1	85.5	85.6	86.4	86.4	87.0	87.7
≥ 1200	39.5	75.3	79.6	81.7	83.7	83.9	85.0	85.6	85.7	86.3	86.7	86.8	87.6	87.6	88.2	88.8
≥ 1000	39.6	76.1	80.4	82.5	84.5	84.8	85.8	86.4	86.5	87.1	87.5	87.6	88.4	88.4	89.0	89.7
≥ 900	39.7	76.6	80.9	83.0	85.0	85.3	86.3	86.9	87.0	87.7	88.1	88.2	89.0	89.0	89.6	90.3
≥ 800	39.9	77.1	81.5	83.7	85.7	86.0	87.0	87.6	87.7	88.4	88.7	88.8	89.7	89.7	90.3	90.9
≥ 700	39.9	77.4	82.0	84.2	86.3	86.6	87.7	88.3	88.4	89.0	89.4	89.5	90.4	90.4	90.9	91.7
≥ 600	40.0	77.6	82.3	84.5	86.7	87.0	88.1	88.7	88.8	89.5	89.9	90.0	90.8	90.9	91.4	92.2
≥ 500	40.0	78.1	83.1	85.3	87.5	87.9	89.2	89.8	89.9	90.6	91.0	91.1	91.9	92.0	92.5	93.2
≥ 400	40.0	78.3	83.5	85.7	88.1	88.4	89.8	90.5	90.6	91.3	91.7	91.8	92.7	92.7	93.2	94.0
≥ 300	40.0	78.5	83.7	86.0	88.4	88.8	90.4	91.3	91.4	92.4	93.0	93.1	94.0	94.0	94.7	95.4
≥ 200	40.0	78.6	83.8	86.1	88.6	89.0	90.8	91.7	91.9	93.0	93.7	93.8	94.9	95.0	95.6	96.7
≥ 100	40.0	78.6	83.8	86.1	88.6	89.0	90.8	91.7	91.9	93.0	93.9	94.0	95.4	95.5	96.6	97.7
≥ 0	40.0	78.6	83.8	86.1	88.6	89.0	90.8	91.7	91.9	93.0	93.9	94.0	95.5	95.8	97.2	100.0

TOTAL NUMBER OF OBSERVATIONS 2043

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	24.8	41.8	44.1	45.6	47.3	47.6	48.9	49.3	49.4	50.2	51.1	51.1	51.4	51.5	51.9	53.2
≥ 20000	27.1	46.1	48.8	50.9	52.7	53.0	54.4	54.8	54.9	55.7	56.6	56.7	57.0	57.1	57.5	59.1
≥ 18000	27.2	46.3	49.0	51.1	52.9	53.3	54.6	55.1	55.1	56.0	56.8	56.9	57.3	57.3	57.7	59.3
≥ 16000	27.3	46.5	49.3	51.4	53.2	53.5	54.8	55.3	55.4	56.2	57.1	57.1	57.5	57.6	58.0	59.6
≥ 14000	27.5	47.3	50.0	52.3	54.2	54.5	55.9	56.4	56.5	57.3	58.2	58.3	58.7	58.7	59.1	60.7
≥ 12000	28.3	48.5	51.4	53.8	55.9	56.3	57.6	58.2	58.2	59.1	60.0	60.1	60.5	60.5	60.9	62.5
≥ 10000	29.3	51.1	54.3	56.8	58.9	59.3	60.7	61.3	61.3	62.2	63.1	63.2	63.6	63.6	64.0	65.7
≥ 9000	29.3	51.9	55.1	57.6	59.8	60.2	61.5	62.1	62.2	63.1	64.0	64.0	64.4	64.5	64.9	66.5
≥ 8000	29.9	53.3	56.8	59.3	61.7	62.1	63.5	64.1	64.1	65.2	66.1	66.1	66.6	66.7	67.1	68.7
≥ 7000	30.8	55.2	58.9	61.5	63.9	64.3	65.8	66.3	66.4	67.5	68.3	68.4	68.9	68.9	69.3	71.0
≥ 6000	31.3	56.6	60.4	63.1	65.5	65.9	67.4	68.0	68.1	69.1	70.0	70.1	70.6	70.6	71.0	72.7
≥ 5000	31.7	57.8	61.8	64.6	67.3	67.7	69.2	69.9	70.0	71.0	71.9	72.0	72.5	72.6	72.9	74.6
≥ 4500	32.1	58.7	62.9	65.7	68.5	68.9	70.5	71.2	71.2	72.4	73.2	73.3	73.8	73.9	74.3	73.9
≥ 4000	32.7	60.0	64.4	67.4	70.3	70.6	72.2	72.9	73.0	74.2	75.0	75.1	75.6	75.7	76.1	77.7
≥ 3500	33.2	61.1	65.5	68.5	71.5	71.9	73.5	74.2	74.4	75.5	76.4	76.5	77.0	77.0	77.4	79.1
≥ 3000	33.8	62.3	67.0	70.2	73.3	73.7	75.4	76.1	76.2	77.4	78.3	78.4	78.9	79.0	79.4	81.0
≥ 2500	34.1	63.6	68.3	71.5	74.8	75.2	76.9	77.6	77.7	78.9	79.8	79.9	80.4	80.5	80.9	82.6
≥ 2000	34.4	64.4	69.2	72.4	75.8	76.2	77.9	78.6	78.8	80.0	80.9	81.0	81.5	81.6	82.0	83.7
≥ 1800	34.4	64.6	69.5	72.7	76.1	76.6	78.3	79.0	79.2	80.4	81.4	81.5	82.0	82.0	82.5	84.1
≥ 1500	34.7	65.3	70.2	73.4	77.0	77.4	79.3	79.9	80.1	81.3	82.3	82.4	82.9	83.0	83.4	85.1
≥ 1200	35.0	66.4	71.5	74.8	78.5	78.9	80.7	81.6	81.7	82.9	84.0	84.1	84.6	84.6	85.1	86.7
≥ 1000	35.2	67.5	72.7	76.1	79.8	80.3	82.1	82.9	83.1	84.3	85.3	85.4	86.0	86.0	86.4	88.1
≥ 900	35.5	68.0	73.3	76.7	80.5	80.9	82.7	83.6	83.7	84.9	86.0	86.1	86.6	86.6	87.1	88.7
≥ 800	35.6	68.5	73.9	77.5	81.4	81.8	83.7	84.5	84.6	86.0	87.0	87.1	87.6	87.7	88.1	89.8
≥ 700	35.7	69.1	74.7	78.4	82.2	82.7	84.6	85.5	85.6	86.9	88.0	88.1	88.6	88.6	89.1	90.8
≥ 600	35.8	69.4	75.0	78.9	82.8	83.3	85.2	86.2	86.3	87.8	88.8	88.9	89.4	89.5	90.0	91.7
≥ 500	35.8	69.6	75.6	79.5	83.7	84.1	86.1	87.1	87.2	88.7	89.7	89.8	90.4	90.4	90.9	92.6
≥ 400	35.9	69.9	76.1	80.0	84.6	85.2	87.3	88.5	88.6	90.3	91.4	91.5	92.1	92.2	92.7	94.4
≥ 300	35.9	70.0	76.2	80.4	85.3	85.9	88.5	89.7	89.9	91.8	93.0	93.1	93.7	93.7	94.3	96.0
≥ 200	35.9	70.0	76.3	80.5	85.5	86.1	88.8	90.2	90.4	92.7	93.8	93.9	94.8	94.8	95.4	97.5
≥ 100	35.9	70.1	76.3	80.5	85.6	86.2	88.9	90.4	90.6	92.9	94.2	94.3	95.3	95.4	96.1	98.4
0	35.9	70.1	76.3	80.5	85.6	86.2	88.9	90.4	90.6	92.9	94.2	94.3	95.4	95.5	96.6	100.0

TOTAL NUMBER OF OBSERVATIONS 2044

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS (L S T))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	27.4	43.9	45.8	47.8	48.7	48.7	49.4	49.8	49.9	50.2	50.3	50.3	50.5	50.5	50.6	50.7
≥ 20000	30.8	50.3	53.2	55.3	56.5	56.6	57.3	57.7	57.8	58.3	58.5	58.6	58.8	58.8	58.9	59.0
≥ 18000	30.9	50.7	53.6	55.8	57.0	57.0	57.8	58.2	58.3	58.8	59.0	59.1	59.2	59.2	59.3	59.4
≥ 16000	31.0	50.9	53.8	56.1	57.3	57.3	58.1	58.5	58.6	59.1	59.3	59.3	59.5	59.5	59.6	59.7
≥ 14000	31.8	52.3	55.2	57.6	58.8	58.9	59.7	60.1	60.2	60.7	60.9	60.9	61.1	61.1	61.2	61.3
≥ 12000	32.8	54.5	57.7	60.2	61.5	61.5	62.4	62.8	62.9	63.4	63.6	63.6	63.8	63.8	63.9	64.0
≥ 10000	33.7	56.2	59.7	62.3	63.6	63.7	64.6	65.0	65.1	65.6	65.8	65.8	66.0	66.0	66.1	66.2
≥ 9000	34.0	57.0	60.8	63.5	64.8	64.9	65.8	66.2	66.3	66.8	67.0	67.0	67.2	67.2	67.3	67.4
≥ 8000	35.1	59.0	63.1	65.8	67.4	67.5	68.4	68.8	68.9	69.5	69.7	69.8	70.0	70.0	70.1	70.2
≥ 7000	36.3	60.8	65.2	68.1	69.8	69.9	70.9	71.3	71.4	72.0	72.2	72.2	72.4	72.4	72.5	72.5
≥ 6000	36.8	62.2	66.8	69.8	71.5	71.6	72.6	72.9	73.0	73.6	73.8	73.9	74.1	74.1	74.2	74.3
≥ 5000	37.2	64.0	68.8	72.1	74.1	74.2	75.1	75.5	75.6	76.2	76.4	76.5	76.7	76.7	76.8	76.9
≥ 4500	37.4	64.7	69.5	72.8	74.9	75.0	76.0	76.4	76.5	77.1	77.3	77.3	77.5	77.5	77.6	77.7
≥ 4000	37.7	65.3	70.1	73.6	75.7	75.8	76.9	77.3	77.4	78.0	78.2	78.2	78.4	78.4	78.5	78.6
≥ 3500	38.0	66.1	71.1	74.7	76.8	76.9	78.0	78.4	78.6	79.2	79.4	79.4	79.6	79.6	79.7	79.8
≥ 3000	38.4	67.0	72.1	75.7	77.9	78.0	79.1	79.5	79.7	80.3	80.5	80.5	80.7	80.7	80.8	80.9
≥ 2500	38.8	67.8	73.1	76.8	79.1	79.2	80.2	80.8	81.0	81.6	81.9	81.9	82.1	82.1	82.2	82.3
≥ 2000	39.4	69.1	74.7	78.3	80.7	80.8	81.9	82.5	82.7	83.3	83.6	83.7	83.9	83.9	84.0	84.1
≥ 1800	39.5	69.5	75.0	78.8	81.2	81.3	82.4	83.0	83.2	83.8	84.1	84.1	84.3	84.3	84.4	84.5
≥ 1500	39.7	70.5	76.2	80.1	82.7	82.8	84.1	84.6	84.8	85.5	85.8	85.8	86.0	86.0	86.1	86.2
≥ 1200	40.2	71.7	77.6	81.6	84.2	84.3	85.6	86.2	86.4	87.1	87.4	87.5	87.7	87.7	87.8	87.9
≥ 1000	40.3	72.8	78.8	82.8	85.6	85.7	87.1	87.7	87.8	88.6	88.9	89.0	89.2	89.2	89.3	89.4
≥ 900	40.4	73.3	79.3	83.4	86.2	86.3	87.7	88.3	88.4	89.2	89.6	89.6	89.9	89.9	90.0	90.1
≥ 800	40.5	73.8	79.9	84.1	86.9	87.0	88.5	89.1	89.3	90.2	90.5	90.6	90.8	90.8	90.9	91.0
≥ 700	40.5	74.1	80.2	84.4	87.3	87.5	89.0	89.7	89.9	90.9	91.2	91.2	91.5	91.5	91.6	91.7
≥ 600	40.6	74.6	80.8	85.1	88.1	88.3	89.9	90.8	90.9	92.0	92.4	92.5	92.7	92.7	92.8	92.9
≥ 500	40.6	74.8	81.2	85.8	89.0	89.4	91.0	92.2	92.4	93.5	94.0	94.1	94.3	94.3	94.4	94.5
≥ 400	40.6	75.0	81.6	86.3	89.7	90.1	92.2	93.5	93.8	95.1	95.6	95.6	96.0	96.0	96.2	96.3
≥ 300	40.6	75.0	81.7	86.5	90.2	90.9	93.2	94.8	95.1	96.6	97.2	97.2	97.6	97.6	97.8	97.9
≥ 200	40.6	75.0	81.7	86.5	90.3	90.9	93.5	95.2	95.5	97.1	97.8	97.9	98.5	98.5	98.8	99.1
≥ 100	40.6	75.0	81.7	86.5	90.3	90.9	93.5	95.2	95.5	97.1	97.9	98.0	98.7	98.7	99.1	99.7
≥ 0	40.6	75.0	81.7	86.5	90.3	90.9	93.5	95.2	95.5	97.1	97.9	98.0	98.7	98.7	99.2	100.0

TOTAL NUMBER OF OBSERVATIONS 2044

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0
NO CEILING	39.0	51.7	52.2	52.3	52.6	52.6	52.6	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7
≥ 20000	44.1	59.7	60.3	60.7	61.0	61.1	61.1	61.1	61.1	61.2	61.2	61.2	61.2	61.2	61.2
≥ 18000	44.2	60.1	60.7	61.1	61.4	61.5	61.5	61.5	61.5	61.6	61.6	61.6	61.6	61.6	61.6
≥ 16000	44.3	60.4	61.0	61.4	61.8	61.8	61.8	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9
≥ 14000	46.0	62.2	62.8	63.2	63.6	63.6	63.6	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7
≥ 12000	47.7	64.5	65.1	65.5	65.9	65.9	66.0	66.0	66.0	66.1	66.1	66.1	66.1	66.1	66.1
≥ 10000	48.5	66.5	67.2	67.7	68.1	68.1	68.2	68.2	68.2	68.3	68.3	68.3	68.3	68.3	68.3
≥ 9000	49.0	67.4	68.1	68.7	69.1	69.1	69.2	69.2	69.2	69.3	69.3	69.3	69.3	69.3	69.3
≥ 8000	50.1	69.4	70.2	70.9	71.2	71.3	71.5	71.5	71.5	71.6	71.6	71.6	71.6	71.6	71.6
≥ 7000	50.8	70.7	71.6	72.4	72.7	72.8	73.0	73.0	73.0	73.1	73.1	73.1	73.1	73.1	73.1
≥ 6000	51.4	71.9	73.1	74.0	74.5	74.6	74.8	74.9	74.9	75.0	75.0	75.0	75.0	75.0	75.0
≥ 5000	52.5	74.3	75.4	76.5	76.9	77.1	77.3	77.3	77.3	77.4	77.4	77.4	77.4	77.4	77.4
≥ 4500	52.8	74.6	75.8	76.8	77.3	77.5	77.7	77.7	77.7	77.8	77.8	77.8	77.8	77.8	77.8
≥ 4000	53.3	75.7	77.0	78.0	78.6	78.8	79.0	79.0	79.0	79.1	79.1	79.1	79.1	79.1	79.1
≥ 3500	54.0	77.0	78.3	79.3	80.0	80.1	80.3	80.4	80.4	80.5	80.5	80.5	80.5	80.5	80.5
≥ 3000	55.4	79.1	80.4	81.4	82.1	82.3	82.6	82.6	82.6	82.7	82.7	82.7	82.7	82.7	82.7
≥ 2500	56.2	80.8	82.3	83.4	84.0	84.2	84.5	84.5	84.5	84.6	84.6	84.6	84.6	84.6	84.6
≥ 2000	57.0	83.0	84.5	85.7	86.5	86.7	87.0	87.0	87.0	87.1	87.1	87.1	87.1	87.1	87.1
≥ 1800	57.2	83.6	85.2	86.3	87.2	87.4	87.7	87.7	87.7	87.8	87.8	87.8	87.8	87.8	87.8
≥ 1500	57.7	84.9	86.6	87.8	88.7	88.9	89.2	89.3	89.3	89.4	89.4	89.4	89.4	89.4	89.4
≥ 1200	58.2	86.3	88.1	89.5	90.4	90.7	91.1	91.1	91.1	91.2	91.3	91.3	91.3	91.3	91.3
≥ 1000	58.5	87.3	89.4	90.9	91.9	92.2	92.6	92.7	92.7	92.8	92.8	92.8	92.9	92.9	92.9
≥ 900	58.5	87.6	89.7	91.4	92.5	92.7	93.2	93.3	93.3	93.4	93.5	93.5	93.5	93.5	93.5
≥ 800	58.6	88.1	90.3	92.2	93.2	93.5	94.1	94.2	94.2	94.3	94.4	94.4	94.4	94.4	94.4
≥ 700	58.9	88.5	90.8	92.9	94.1	94.5	95.2	95.2	95.2	95.3	95.4	95.4	95.4	95.4	95.4
≥ 600	58.9	88.5	90.8	93.0	94.2	94.8	95.6	95.7	95.8	96.0	96.0	96.0	96.1	96.1	96.1
≥ 500	58.9	88.8	91.1	93.3	94.6	95.3	96.4	96.5	96.6	96.8	96.9	96.9	97.0	97.0	97.0
≥ 400	58.9	88.8	91.1	93.4	94.9	95.6	97.1	97.3	97.4	97.9	98.0	98.0	98.1	98.1	98.1
≥ 300	58.9	88.8	91.2	93.7	95.3	96.2	97.7	98.1	98.3	99.1	99.3	99.3	99.5	99.5	99.5
≥ 200	58.9	88.8	91.2	93.7	95.3	96.2	97.7	98.2	98.3	99.2	99.4	99.5	99.7	99.7	99.9 100.0
≥ 100	58.9	88.8	91.2	93.7	95.3	96.2	97.7	98.2	98.3	99.2	99.4	99.5	99.7	99.7	99.9 100.0
≥ 0	58.9	88.8	91.2	93.7	95.3	96.2	97.7	98.2	98.3	99.2	99.4	99.5	99.7	99.7	99.9 100.0

TOTAL NUMBER OF OBSERVATIONS 2043

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING	40.9	52.3	52.4	52.5	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6
≥ 20000	47.7	62.6	63.0	63.0	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2
≥ 18000	48.1	63.1	63.4	63.5	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6
≥ 16000	48.4	63.6	63.9	64.0	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1
≥ 14000	49.4	65.1	65.5	65.5	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7
≥ 12000	50.8	67.5	67.8	67.9	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
≥ 10000	51.6	69.5	69.9	69.9	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 9000	52.5	70.7	71.2	71.3	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 8000	53.7	72.7	73.4	73.5	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
≥ 7000	54.3	73.9	74.6	74.8	74.9	74.9	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 6000	55.0	74.9	75.7	76.0	76.1	76.2	76.3	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 5000	55.6	76.0	76.9	77.3	77.4	77.4	77.6	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7
≥ 4500	56.3	77.0	78.0	78.3	78.5	78.5	78.7	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 4000	57.0	78.2	79.2	79.5	79.8	79.9	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2
≥ 3500	58.4	79.9	81.1	81.4	81.7	81.8	82.0	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 3000	59.9	82.0	83.2	83.6	83.9	83.9	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3
≥ 2500	60.8	84.2	85.5	85.9	86.2	86.3	86.6	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7
≥ 2000	61.2	86.2	87.6	88.1	88.4	88.5	88.8	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9
≥ 1800	61.4	86.6	88.1	88.6	88.8	88.9	89.3	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 1500	61.7	87.8	89.2	89.8	90.2	90.3	90.8	91.0	91.0	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 1200	62.0	88.9	90.6	91.4	91.8	91.9	92.5	92.9	92.9	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 1000	62.1	89.4	91.1	92.1	92.5	92.6	93.2	93.6	93.6	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 900	62.2	89.6	91.3	92.5	92.9	93.0	93.6	94.0	94.0	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 800	62.2	90.0	91.8	93.0	93.4	93.5	94.2	94.6	94.6	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 700	62.2	90.2	91.9	93.2	93.9	94.0	94.7	95.1	95.1	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 600	62.2	90.3	92.0	93.3	94.2	94.3	95.1	95.5	95.5	95.7	95.7	95.7	95.8	95.8	95.8	95.8
≥ 500	62.2	90.6	92.4	94.1	95.1	95.3	96.2	97.1	97.1	97.5	97.5	97.5	97.6	97.6	97.6	97.6
≥ 400	62.2	90.6	92.5	94.3	95.5	95.7	97.2	98.1	98.2	98.6	98.6	98.6	98.7	98.7	98.7	98.7
≥ 300	62.2	90.6	92.6	94.4	95.8	95.9	97.5	98.5	98.6	99.1	99.2	99.3	99.4	99.4	99.4	99.4
≥ 200	62.2	90.6	92.6	94.5	95.9	96.1	97.7	98.7	98.9	99.6	99.7	99.7	99.8	99.8	99.9	99.9
≥ 100	62.2	90.6	92.6	94.5	95.9	96.1	97.7	98.7	98.9	99.6	99.8	99.8	99.9	99.9	100.0	100.0
≥ 0	62.2	90.6	92.6	94.5	95.9	96.1	97.7	98.7	98.9	99.6	99.8	99.8	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 2044

USAFETAC FORM AK 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	40.6	57.6	58.3	58.7	58.9	58.9	59.0	59.0	59.0	59.0	59.0	59.0	59.1	59.1	59.3	59.3
≥ 20000	43.4	63.1	64.0	64.3	64.5	64.5	64.6	64.6	64.6	64.6	64.6	64.6	64.7	64.7	64.9	64.9
≥ 18000	43.7	63.6	64.4	64.8	65.0	65.1	65.1	65.1	65.1	65.1	65.2	65.2	65.2	65.2	65.4	65.5
≥ 16000	43.9	64.0	64.8	65.2	65.4	65.5	65.5	65.5	65.5	65.5	65.6	65.6	65.6	65.6	65.8	65.9
≥ 14000	44.8	65.4	66.3	66.6	66.9	67.0	67.0	67.1	67.1	67.1	67.1	67.1	67.2	67.2	67.4	67.5
≥ 12000	45.8	67.3	68.2	68.6	69.0	69.0	69.1	69.1	69.1	69.1	69.2	69.2	69.3	69.3	69.5	69.5
≥ 10000	47.3	69.7	70.6	71.0	71.4	71.4	71.5	71.5	71.5	71.5	71.6	71.6	71.7	71.7	71.9	71.9
≥ 9000	47.8	70.7	71.5	72.0	72.4	72.4	72.5	72.5	72.5	72.5	72.6	72.6	72.7	72.7	72.9	72.9
≥ 8000	48.8	72.1	73.0	73.5	74.0	74.0	74.2	74.2	74.2	74.2	74.3	74.3	74.4	74.4	74.6	74.6
≥ 7000	49.5	73.5	74.5	75.0	75.5	75.6	75.7	75.7	75.8	75.8	75.8	75.8	75.9	75.9	76.1	76.2
≥ 6000	50.4	75.0	76.0	76.5	77.0	77.1	77.2	77.3	77.4	77.4	77.4	77.4	77.5	77.5	77.7	77.8
≥ 5000	51.0	76.7	77.8	78.3	78.8	78.9	79.2	79.3	79.4	79.4	79.4	79.4	79.5	79.5	79.7	79.8
≥ 4500	51.4	77.5	78.7	79.2	79.8	79.9	80.1	80.2	80.3	80.3	80.3	80.3	80.4	80.4	80.6	80.7
≥ 4000	52.1	79.0	80.2	80.7	81.4	81.6	81.8	82.0	82.0	82.0	82.1	82.1	82.2	82.2	82.3	82.4
≥ 3500	52.7	80.0	81.3	81.8	82.5	82.6	82.9	83.1	83.1	83.1	83.2	83.2	83.3	83.3	83.5	83.5
≥ 3000	53.4	81.7	83.0	83.5	84.2	84.4	84.6	84.8	84.8	84.8	84.9	84.9	85.0	85.0	85.2	85.2
≥ 2500	54.3	83.6	85.0	85.6	86.4	86.5	86.8	86.9	87.0	87.0	87.0	87.0	87.1	87.1	87.3	87.4
≥ 2000	54.6	84.6	86.0	86.7	87.4	87.6	87.9	88.0	88.1	88.1	88.1	88.1	88.2	88.2	88.4	88.5
≥ 1800	54.9	85.2	86.7	87.3	88.1	88.3	88.6	88.7	88.8	88.8	88.8	88.8	88.9	88.9	89.1	89.1
≥ 1500	55.0	86.1	87.5	88.3	89.2	89.3	89.6	89.8	89.8	89.8	89.9	89.9	90.0	90.0	90.2	90.2
≥ 1200	55.3	87.0	88.6	89.5	90.5	90.7	91.0	91.2	91.3	91.3	91.3	91.3	91.4	91.4	91.6	91.7
≥ 1000	55.4	87.4	89.3	90.3	91.3	91.5	91.9	92.2	92.3	92.3	92.4	92.4	92.6	92.6	92.8	92.8
≥ 900	55.4	87.7	89.7	90.8	91.8	92.0	92.4	92.6	92.9	93.0	93.0	93.0	93.2	93.2	93.4	93.4
≥ 800	55.4	87.9	90.1	91.2	92.3	92.5	93.0	93.4	93.4	93.6	93.6	93.6	93.8	93.8	94.0	94.1
≥ 700	55.4	88.1	90.3	91.5	92.7	92.9	93.3	93.8	93.8	94.0	94.0	94.0	94.2	94.2	94.4	94.5
≥ 600	55.4	88.4	90.7	91.9	93.3	93.6	94.2	94.7	94.8	95.0	95.0	95.0	95.2	95.2	95.4	95.5
≥ 500	55.4	88.5	90.8	92.0	93.4	93.7	94.7	95.4	95.4	95.7	95.7	95.7	95.9	95.9	96.1	96.2
≥ 400	55.5	88.6	90.9	92.3	93.8	94.2	95.2	96.0	96.0	96.4	96.5	96.5	96.7	96.7	96.9	96.9
≥ 300	55.5	88.7	91.1	92.6	94.4	94.9	96.1	97.3	97.3	97.8	97.9	97.9	98.1	98.1	98.3	98.4
≥ 200	55.5	88.7	91.1	92.7	94.6	95.1	96.6	97.8	97.9	98.5	98.8	98.8	99.0	99.0	99.2	99.4
≥ 100	55.5	88.7	91.1	92.7	94.6	95.1	96.6	97.8	98.0	98.8	99.1	99.1	99.5	99.5	99.7	99.9
≥ 0	55.5	88.7	91.1	92.7	94.6	95.1	96.6	97.8	98.0	98.8	99.1	99.1	99.5	99.5	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 2045

USAFETAC FORM 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING	35.8	57.0	58.3	59.1	59.8	59.8	60.2	60.3	60.3	60.6	60.7	60.7	61.0	61.0	61.3	61.8
≥ 20000	38.2	61.6	63.1	63.9	64.6	64.6	65.1	65.1	65.1	65.4	65.5	65.5	65.8	65.8	66.1	66.7
≥ 18000	38.4	61.9	63.4	64.2	64.9	64.9	65.3	65.4	65.4	65.7	65.8	65.8	66.1	66.1	66.4	67.0
≥ 16000	38.4	62.0	63.5	64.3	65.0	65.0	65.4	65.5	65.5	65.8	65.9	65.9	66.2	66.2	66.5	67.1
≥ 14000	39.1	63.1	64.7	65.5	66.2	66.2	66.7	66.8	66.8	67.1	67.2	67.2	67.4	67.4	67.7	68.3
≥ 12000	40.2	64.9	66.6	67.4	68.2	68.2	68.6	68.7	68.7	69.1	69.2	69.2	69.5	69.5	69.8	70.3
≥ 10000	41.1	66.6	68.3	69.2	69.9	69.9	70.4	70.5	70.5	70.8	70.9	70.9	71.2	71.2	71.5	72.1
≥ 9000	41.6	67.5	69.2	70.1	70.9	70.9	71.3	71.4	71.4	71.8	71.9	71.9	72.1	72.1	72.4	73.0
≥ 8000	42.0	68.6	70.3	71.5	72.3	72.3	72.7	72.8	72.8	73.2	73.3	73.3	73.6	73.6	73.9	74.4
≥ 7000	42.7	69.9	71.7	72.9	73.7	73.7	74.2	74.3	74.3	74.6	74.7	74.7	75.0	75.0	75.3	75.8
≥ 6000	43.7	71.3	73.1	74.3	75.2	75.2	75.6	75.7	75.7	76.1	76.2	76.2	76.5	76.5	76.7	77.3
≥ 5000	44.7	73.3	75.3	76.6	77.5	77.5	78.0	78.1	78.1	78.5	78.6	78.6	78.9	78.9	79.1	79.7
≥ 4500	45.5	74.5	76.7	78.0	79.0	79.0	79.4	79.5	79.5	79.9	80.0	80.0	80.3	80.3	80.6	81.1
≥ 4000	46.3	75.7	78.0	79.3	80.3	80.4	80.9	81.0	81.0	81.3	81.4	81.4	81.7	81.7	82.0	82.5
≥ 3500	46.7	76.8	79.1	80.5	81.5	81.5	82.1	82.2	82.2	82.5	82.6	82.6	82.9	82.9	83.2	83.7
≥ 3000	47.5	78.5	80.8	82.2	83.3	83.3	83.9	84.0	84.0	84.4	84.5	84.5	84.8	84.8	85.1	85.6
≥ 2500	47.9	79.6	82.0	83.4	84.4	84.5	85.2	85.3	85.3	85.6	85.7	85.7	86.0	86.0	86.3	86.8
≥ 2000	48.1	80.2	82.8	84.2	85.3	85.3	86.0	86.1	86.1	86.5	86.6	86.6	86.9	86.9	87.2	87.7
≥ 1800	48.2	80.6	83.3	84.7	85.8	85.8	86.5	86.6	86.6	87.0	87.1	87.1	87.4	87.4	87.7	88.2
≥ 1500	48.4	81.2	83.9	85.5	86.5	86.6	87.3	87.4	87.4	87.8	87.9	87.9	88.2	88.2	88.5	89.0
≥ 1200	48.5	82.0	84.7	86.4	87.5	87.6	88.4	88.5	88.5	88.9	89.0	89.0	89.3	89.3	89.6	90.2
≥ 1000	48.7	83.0	86.0	87.9	88.9	89.1	90.0	90.2	90.2	90.7	90.7	90.7	91.0	91.0	91.3	91.9
≥ 900	48.7	83.7	86.7	88.6	89.7	89.9	90.8	91.0	91.0	91.5	91.6	91.6	91.9	91.9	92.2	92.7
≥ 800	48.7	84.3	87.7	89.6	90.7	90.9	91.8	92.0	92.0	92.3	92.6	92.6	92.9	92.9	93.1	93.7
≥ 700	48.7	84.4	87.9	89.8	91.0	91.2	92.1	92.3	92.3	92.8	92.9	92.9	93.1	93.1	93.4	94.0
≥ 600	48.7	84.6	88.1	90.1	91.2	91.5	92.4	92.7	92.7	93.1	93.2	93.2	93.6	93.6	93.9	94.4
≥ 500	48.8	84.8	88.4	90.5	92.2	92.6	93.5	93.8	93.8	94.3	94.4	94.4	94.7	94.7	95.0	95.5
≥ 400	48.8	84.8	88.5	90.6	92.4	92.8	93.8	94.3	94.3	94.7	94.8	94.8	95.2	95.2	95.4	96.0
≥ 300	48.8	85.0	88.7	90.9	92.9	93.3	94.3	95.1	95.2	95.6	95.7	95.7	96.1	96.1	96.4	96.9
≥ 200	48.8	85.2	88.9	91.1	93.1	93.6	94.8	95.6	95.7	96.5	96.8	96.8	97.2	97.2	97.5	98.2
≥ 100	48.8	85.2	88.9	91.1	93.2	93.7	94.5	95.8	95.8	96.7	97.1	97.1	97.7	97.8	98.4	99.4
≥ 0	48.8	85.2	88.9	91.1	93.2	93.7	94.9	95.8	95.8	96.7	97.1	97.1	97.7	97.9	98.5	100.0

TOTAL NUMBER OF OBSERVATIONS 2043

USAFETAC FORM JUL 64 0-14-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PART D SKY COVER

This summary is prepared from hourly observations and is a percentage frequency distribution of total sky cover by tenths, plus mean sky cover, and total number of observations. It is presented in two tables as follows:

1. By month and annual - all hours and all years combined.

2. By month - by standard 3-hour groups.

NOTE: # 1: Sky cover (total cloud amount) was not reported by U. S. Services until mid 1945. Data, when available, were punched for Air Force stations beginning in 1946, but were not available for Navy stations until 1948 or 1949. Weather Bureau stations recorded total cloud amount in remarks beginning sometime in 1945, but few stations have punched data prior to 1948. This summary will, of course, be limited to period of available data.

NOTE: # 2: Some sources of punched data used for this summary report cloud amounts in oktas. These have been converted to tenths prior to summarizing, and notation is made on the form to indicate that data were originally reported in oktas. The manner of conversion is given below:

OKTAS	TENTHS
0	0
1	1
2	3
3	4
4	5
5	6
6	8
7	9
8 (or obscured)	10

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
JAN	ALL	25.9	4.5	5.2	4.9	3.5	2.5	3.0	3.9	5.3	4.4	37.2	5.5	17103
FEB		26.3	3.9	4.5	3.8	3.3	2.5	3.1	4.2	5.5	4.6	38.4	5.7	15595
MAR		25.1	4.1	5.0	4.7	3.9	2.8	3.4	4.6	5.9	4.7	35.9	5.6	16643
APR		27.7	5.3	5.7	4.7	4.4	3.6	3.7	5.3	6.4	4.8	28.4	5.0	15304
MAY		21.4	5.1	6.5	6.3	5.7	4.6	4.8	6.4	8.1	5.4	25.6	5.3	16693
JUN		15.0	5.5	6.3	6.6	5.9	4.9	5.3	8.2	10.5	7.1	24.4	5.7	15412
JUL		9.8	4.0	6.3	7.2	7.0	6.0	6.1	9.2	11.4	8.7	24.4	6.1	15920
AUG		14.1	4.6	6.4	7.9	7.4	6.0	5.4	8.7	11.0	6.8	21.8	5.6	15944
SEP		16.4	4.9	6.4	5.9	5.6	4.7	4.8	7.0	9.5	6.8	28.1	5.8	15642
OCT		33.7	6.0	5.5	4.8	4.2	3.2	3.1	4.6	5.7	3.8	25.5	4.5	16285
NOV		34.3	4.9	5.2	4.9	3.8	2.7	3.1	4.3	5.5	4.8	26.5	4.6	15833
DEC		28.7	4.6	4.8	4.3	3.3	2.3	3.2	4.5	5.9	4.7	33.9	5.3	16348
TOTALS		23.2	4.8	5.7	5.5	4.8	3.8	4.1	5.9	7.6	5.6	29.2	5.4	192784

USAF ETAC FORM JUL 64 0-9-5 (OL-I) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
JAN	00-02	34.9	4.3	4.5	3.9	3.3	1.7	2.6	3.1	4.5	3.2	34.0	4.9	2137
	03-05	33.8	2.6	4.4	3.9	3.0	1.4	3.5	3.8	5.2	2.9	35.4	5.1	2138
	06-08	24.0	3.7	5.1	4.3	3.2	2.6	3.1	4.5	5.2	5.5	38.7	5.8	2136
	09-11	21.4	4.7	5.4	4.7	3.0	2.2	2.1	3.8	5.0	5.9	41.2	6.0	2139
	12-14	18.1	3.5	5.1	4.9	3.7	2.9	3.8	3.9	6.3	5.4	40.3	6.1	2139
	15-17	17.6	6.3	5.9	5.1	3.6	3.4	3.1	4.5	5.8	5.3	39.4	6.0	2138
	18-20	24.6	5.8	5.7	5.3	3.6	3.4	2.9	4.3	5.6	3.5	35.3	5.4	2139
	21-23	32.4	3.1	5.2	4.2	4.0	2.7	3.2	3.6	4.5	3.3	33.5	5.0	2137
TOTALS		25.9	4.5	5.2	4.5	3.5	2.5	3.0	3.9	5.3	4.4	37.2	5.5	17103

USAF ETAC FORM JUL 64 0-9-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 PERIOD | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
FEB	00-02	36.1	3.2	4.1	3.4	2.6	1.9	2.5	3.0	3.9	2.4	36.8	5.0	1949
	03-05	35.1	2.5	4.5	3.0	3.0	1.4	2.4	3.4	3.8	2.7	38.2	5.1	1930
	06-08	24.0	3.5	4.1	4.2	2.8	2.4	2.4	4.5	6.0	4.5	39.9	5.8	1949
	09-11	20.7	3.8	4.2	3.3	3.1	2.2	3.3	4.8	6.9	5.6	42.1	6.2	1949
	12-14	19.5	3.5	4.6	3.2	3.6	2.8	4.1	4.8	7.2	7.4	39.4	6.3	1949
	15-17	18.5	4.3	4.6	4.4	3.7	3.4	3.8	5.3	6.5	6.4	39.3	6.2	1950
	18-20	23.0	3.3	4.9	3.8	4.1	3.0	3.4	3.9	5.5	4.4	36.6	5.6	1950
	21-23	33.4	3.4	5.0	3.4	3.1	2.9	2.7	4.2	4.2	3.2	34.5	5.0	1949
TOTALS		26.3	3.9	4.5	3.6	3.3	2.5	3.1	4.2	5.5	4.6	38.4	5.7	15595

USAF ETAC FORM JUL 64 0-9-5 (OL-I) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 40-70 (PERIOD) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
MAR	00-02	36.0	2.3	4.7	3.9	4.3	2.4	3.2	3.6	4.1	2.1	33.4	4.8	2047
	03-05	34.4	2.2	4.7	3.9	3.6	2.3	2.4	3.2	4.8	2.4	36.0	5.1	2049
	06-08	20.4	4.8	5.5	4.7	3.6	2.6	3.2	3.8	6.9	5.4	39.2	6.0	2098
	09-11	20.9	4.7	4.7	5.0	3.2	2.7	2.8	4.3	6.3	6.3	39.2	6.0	2126
	12-14	17.5	5.1	4.7	4.7	4.2	3.6	3.9	6.5	7.6	7.4	34.8	6.1	2126
	15-17	16.3	4.9	5.4	4.9	4.2	3.9	3.8	6.4	6.9	6.7	36.7	6.2	2102
	18-20	21.6	5.5	5.4	5.0	4.2	2.4	4.4	5.1	6.7	4.3	35.5	5.7	2051
	21-23	33.5	3.6	5.2	5.2	4.2	2.2	3.8	3.6	4.1	2.6	32.1	4.8	2046
TOTALS		25.1	4.1	5.0	4.7	3.9	2.8	3.4	4.6	5.9	4.7	35.9	5.6	16645

USAF ETAC FORM JUL 64 0-9-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-68,70 PERIOD | APR MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
APR	00-02	42.6	4.3	5.3	3.9	3.9	2.2	3.2	3.5	3.4	2.4	25.2	4.0	1688
	03-05	39.5	3.6	4.[illegible]	4.1	4.1	2.7	3.1	4.3	4.7	1.5	27.2	4.3	1890
	06-08	22.6	5.1	6.0	4.8	4.9	3.2	3.1	5.1	7.2	5.7	32.3	5.3	1940
	09-11	21.3	6.2	4.8	4.1	4.7	3.6	4.0	5.7	8.2	6.3	30.9	5.6	1963
	12-14	16.0	5.1	5.5	4.8	3.3	5.4	5.3	7.0	8.9	6.9	29.6	5.9	1963
	15-17	17.4	6.2	6.1	5.5	4.4	5.6	4.4	6.9	8.1	6.1	29.3	5.7	1939
	18-20	23.0	6.6	7.0	6.3	4.0	3.1	3.2	5.1	7.1	6.6	28.0	5.2	1890
	21-23	39.3	5.1	5.6	4.1	3.7	3.0	3.6	4.6	3.9	2.6	24.4	4.1	1890
TOTALS		27.7	5.3	5.7	4.7	4.4	3.6	3.7	5.3	6.4	4.8	28.4	5.0	15364

USAF ETAC FORM JUL 64 0-9-5 (OL-I) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
MAY	00-02	37.8	4.3	7.1	5.5	4.5	2.5	3.7	4.4	4.9	3.0	22.2	4.1	2044
	03-05	30.7	5.5	7.8	6.9	4.9	3.1	4.2	5.1	5.2	4.0	22.6	4.4	2064
	06-08	17.3	6.3	6.4	6.3	6.2	3.5	5.1	6.3	9.1	6.3	27.3	5.6	2127
	09-11	17.7	3.8	5.1	5.8	5.7	5.5	4.8	7.7	11.0	7.3	25.5	5.7	2125
	12-14	9.4	4.5	5.1	6.7	6.5	8.1	5.7	9.3	11.3	7.3	23.9	6.2	2124
	15-17	10.5	5.0	6.5	6.0	6.8	6.7	5.6	8.0	9.8	6.8	28.1	6.1	2117
	18-20	15.7	6.5	6.8	6.5	6.2	3.7	4.7	6.4	8.1	5.7	29.6	5.7	2046
	21-23	31.9	4.8	7.1	7.0	4.7	3.5	4.8	2.9	5.7	2.9	23.7	4.4	2046
TOTALS		21.4	5.1	6.5	6.3	5.7	4.6	4.8	6.4	8.1	5.4	25.6	5.3	16693

USAF ETAC FORM JUL 64 0-9-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
JUN	00-02	31.6	7.4	7.4	7.0	5.9	2.6	4.1	6.0	6.6	3.3	18.4	4.1	1887
	03-05	25.9	7.3	6.3	8.4	6.9	5.4	4.1	6.3	7.0	3.6	18.8	4.4	1914
	06-08	12.0	6.7	6.0	6.2	6.7	5.2	5.1	7.1	11.2	7.9	25.8	5.9	1967
	09-11	10.9	5.1	4.9	6.4	5.7	5.2	5.4	9.5	12.6	9.3	25.4	6.2	1965
	12-14	3.4	2.9	5.3	5.9	6.3	6.9	7.8	13.4	14.6	10.8	22.9	6.7	1953
	15-17	5.2	5.4	5.9	5.7	6.0	5.7	6.4	10.5	13.4	9.4	26.3	6.5	1952
	18-20	9.5	6.1	6.6	5.9	4.8	4.3	5.2	6.7	10.8	9.5	30.5	6.3	1887
	21-23	21.9	6.2	8.1	7.6	4.9	3.7	4.6	5.9	7.6	3.2	26.7	5.1	1887
TOTALS		15.0	5.9	6.3	6.6	5.9	4.9	5.3	8.2	10.5	7.1	24.4	5.7	15412

USAF ETAC FORM JUL 64 0-9-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
JUL	00-02	25.7	5.4	9.0	7.0	4.7	4.3	5.0	7.0	7.6	4.7	19.7	4.6	1950
	03-05	21.0	5.8	10.1	9.7	7.6	4.2	6.3	6.4	8.0	4.3	16.5	4.6	1978
	06-08	5.9	5.5	7.7	8.9	8.3	6.1	5.4	10.0	11.5	8.0	22.7	6.0	2029
	09-11	4.3	2.9	4.9	6.5	6.5	6.6	6.7	12.4	15.9	9.1	24.2	6.7	2030
	12-14	.7	1.4	2.4	5.2	7.3	9.7	7.5	12.7	17.6	12.9	22.6	7.2	2014
	15-17	1.1	2.6	4.1	7.2	8.8	7.0	6.4	10.3	12.7	13.2	26.5	7.0	2015
	18-20	3.7	4.5	5.4	6.2	5.5	5.4	5.4	7.1	10.8	12.0	33.9	7.0	1953
	21-23	16.1	4.0	7.0	6.8	7.0	4.8	5.9	7.5	7.0	5.2	28.7	5.7	1991
TOTALS		9.8	4.0	6.3	7.2	7.0	6.0	6.1	9.2	11.4	8.7	24.4	6.1	15920

USAF ETAC FORM JUL 64 0-9-5 (OL-I) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 SAVANNAH GEORGIA/HUNTER AAF 48-69 AUG
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
AUG	00-02	31.5	5.7	7.3	7.5	6.0	3.1	4.5	5.6	6.8	3.2	18.7	4.2	1952
	03-05	30.3	6.6	8.7	9.6	7.2	3.5	4.3	4.6	6.7	2.9	15.6	3.9	1978
	06-08	8.5	6.9	8.8	10.1	7.8	5.5	5.4	8.7	9.2	6.5	22.7	5.7	2033
	09-11	8.2	3.8	5.8	7.3	6.9	7.3	7.0	10.1	13.7	7.7	22.1	6.1	2033
	12-14	1.1	1.3	2.7	6.2	9.5	10.9	8.4	12.6	17.0	8.8	21.2	6.8	2021
	15-17	3.3	2.5	4.6	7.3	9.6	7.8	5.1	11.5	15.6	10.5	22.2	6.6	2019
	18-20	7.8	4.3	6.7	7.2	3.8	5.0	4.8	8.7	11.4	10.0	28.4	6.4	1957
	21-23	22.3	5.2	6.9	7.6	6.3	4.9	3.6	7.4	7.5	4.6	23.7	5.0	1951
TOTALS		14.1	4.6	6.4	7.9	7.4	6.0	5.4	8.7	11.0	6.8	21.8	5.6	15944

USAF ETAC FORM JUL 64 0-9-5 (OL1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 46-69 PERIOD | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
SEP	00-02	32.7	6.2	8.0	5.6	4.5	2.7	4.1	4.7	5.0	3.6	22.9	4.3	1934
	03-05	29.1	4.9	7.9	6.6	5.8	3.6	3.6	5.3	5.6	2.7	24.8	4.6	1958
	06-08	10.6	3.2	7.6	6.5	6.5	5.2	3.9	6.8	10.2	6.7	30.8	6.1	1971
	09-11	9.1	4.0	4.3	4.5	4.3	5.3	6.5	10.0	13.4	9.1	29.5	6.6	1971
	12-14	4.6	3.2	3.6	4.5	5.2	7.4	6.7	10.3	13.6	11.4	29.5	7.0	1966
	15-17	5.0	4.4	6.3	6.8	6.6	5.2	4.7	7.0	12.5	10.0	31.7	6.7	1967
	18-20	13.1	6.0	6.9	5.9	5.7	4.1	4.5	7.0	8.7	7.4	30.8	6.0	1938
	21-23	26.9	5.0	6.8	6.1	6.0	4.2	4.7	4.8	6.6	3.6	24.9	4.8	1937
TOTALS		16.4	4.9	6.4	5.9	5.6	4.7	4.8	7.0	9.5	6.8	28.1	5.8	15642

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
OCT	00-02	49.1	4.7	3.9	4.2	3.0	2.0	2.1	3.1	5.4	2.1	20.4	3.5	2036
	03-05	44.9	5.2	5.2	3.3	2.8	1.6	3.1	4.3	3.9	2.0	23.7	3.8	2036
	06-08	26.9	6.1	7.3	5.3	4.3	2.9	2.0	3.9	5.4	5.4	28.5	4.9	2037
	09-11	20.2	5.5	5.0	4.3	4.7	3.2	2.9	6.1	7.0	4.5	28.6	5.1	2037
	12-14	19.8	5.7	5.1	5.9	5.0	5.7	4.3	6.2	8.5	5.7	27.7	5.5	2035
	15-17	21.8	6.6	6.4	5.9	6.3	4.5	4.2	5.9	6.1	5.8	26.5	5.2	2034
	18-20	32.5	7.9	6.5	4.6	4.3	2.9	3.1	4.2	5.2	2.6	26.1	4.4	2035
	21-23	46.5	4.4	4.2	4.9	2.9	2.5	2.9	2.8	4.4	2.1	22.3	3.7	2035
TOTALS		33.7	6.0	5.5	4.8	4.2	3.2	3.1	4.6	5.7	3.8	25.5	4.5	16285

USAF ETAC FORM JUL 64 0-9-5 (OL1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
NOV	00-02	44.7	2.9	4.0	5.0	2.7	2.2	3.5	4.0	4.3	2.2	24.5	4.0	1979
	03-05	41.7	3.8	4.6	4.3	3.3	2.6	4.0	3.7	4.5	2.8	24.5	4.1	1979
	06-08	28.2	6.4	5.9	5.1	4.0	2.7	2.8	4.8	6.3	6.8	27.1	5.0	1977
	09-11	29.6	6.0	5.2	5.4	5.0	2.9	2.4	3.0	5.3	7.2	28.0	4.9	1979
	12-14	20.3	5.2	5.1	4.8	4.8	3.5	2.7	4.9	7.5	6.8	28.3	5.2	1979
	15-17	27.0	4.8	5.8	4.6	4.5	3.3	2.[illegible]	6.0	7.0	5.9	28.5	5.2	1980
	18-20	34.2	5.8	6.1	5.1	3.2	2.4	4.0	4.4	5.3	3.7	25.8	4.5	1980
	21-23	42.8	3.9	5.1	3.1	3.0	2.2	2.6	3.3	3.9	2.6	25.5	4.0	1980
TOTALS		34.3	4.9	5.2	4.9	3.8	2.7	3.1	4.3	5.5	4.8	26.3	4.6	15833

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 PERIOD | DEC MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
DEC	00-02	36.2	3.7	4.3	4.1	2.4	1.8	2.7	4.6	5.3	3.0	29.8	4.6	2042
	03-05	38.1	3.6	5.1	4.5	2.1	1.3	3.2	3.9	3.4	2.9	34.7	4.9	2043
	06-08	25.3	4.5	5.4	3.8	3.4	2.6	3.5	4.8	6.0	4.8	35.8	5.6	2044
	09-11	21.4	5.8	4.6	4.3	2.9	2.3	3.6	4.9	7.3	6.5	36.4	5.9	2044
	12-14	22.2	5.0	4.5	4.2	3.0	3.5	3.4	5.2	7.1	6.3	35.5	5.8	2043
	15-17	21.8	4.7	4.7	4.0	4.4	2.9	2.9	5.0	6.4	6.6	35.9	5.8	204
	18-20	29.2	5.1	6.4	4.5	3.6	2.0	3.1	3.6	6.3	5.8	32.5	5.1	2045
	21-23	36.2	3.8	3.7	4.4	4.2	1.8	3.4	3.6	5.2	3.1	30.5	4.7	2043
TOTALS		28.7	4.6	4.8	4.3	3.3	2.3	3.2	4.5	5.9	4.7	33.9	5.3	16348

USAF ETAC FORM JUL 64 0-9-5 (OLI) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE (MAC)
ASHEVILLE, NORTH CAROLINA

PART E PSYCHROMETRIC SUMMARIES

In this section are presente' various summaries of dry- and wet-bulb temperatures, dew points, and relative humidity. The order and manner o.° presentation follows:

1. Cumulative percentage frequency of occurrence - derived from daily observations and presented by month and annual for all years combined. These tabulations provide the cumulative percentage frequency to tenths of temperature by 5-degree Fahrenheit increments, plus mean temperature, standard deviation, and total number of observations in three separate tables as follows:

   a. Daily maximum temperature
   b. Daily minimum temperature
   c. Daily mean temperature

2. Extreme values - derived from daily observations with extreme value given for each year and month of record available. Extremes are provided for a month if all days for a month contain valid observations. All months for a year must have valid extremes before the ANNUAL value is selected for that year. Means and standard deviations are computed for months and annual when four or more values are present for any column. Two tables of daily extreme temperatures are prepared:

   a. Extreme maximum temperature
   b. Extreme minimum temperature

   NOTE: A supplementary list also provides extreme temperatures when less than a full month is reported.

3. Bivariate percentage frequency distribution and computations of dry-bulb versus wet-bulb temperature. This tabulation is derived from hourly observations and is presented by month and annual, all hours and all years combined. The following information is provided:

   a. The main body of the summary consists of a bivariate percentage frequency distribution of wet-bulb depression in 17 classes spread horizontally; by 2-degree intervals of dry-bulb temperature vertically. Also provided for each dry-bulb temperature interval is the percentage of observations with dry-bulb and wet-bulb temperature combined; and again for dry-bulb, wet-bulb, and dew-point temperatures separately. Total observations for these four items is also provided in two lines at end of each tabulation table, which may require two pages in some cases.

      NOTE: A percentage frequency in this table of ".0" represents one or more occurrences amounting to less than .05 percent.

b. Statistical data for the individual elements of relative humidity, dry-bulb, wet-bulb, and dew-point temperatures are shown in the section at the bottom left of the forms. These consist of the sum of squares ($\sum X^2$), sums of values ($\sum X$), means ($\bar{X}$), and standard deviations (σx). The number of observations used in the computations for each element is also shown.

c. At the lower right of the form are given the mean number of hours of occurrence for six ranges of dry-bulb, wet-bulb, and dew-point temperatures, and total number of hours possible in the period represented. Mean number of hours is shown to tenths and indicates mean number of hours per year in the annual summary, or mean number of hours per month in the tabulations by month.

NOTE: Wet-bulb temperature usually was not reported prior to 1946. Relative humidity usually was not reported prior to 1949, nor subsequent to June 1958; and was computed by machine methods for observations recorded during these periods. All values of dew-point temperature and relative humidity are with respect to water, unless otherwise indicated.

4. Means and standard deviations - These tabulations are derived from hourly observations and present the mean, standard deviation, and total number of observations for the eight standard 3-hour groups, by month and annual and again at the bottom for all hours combined. Records for all years available are combined. Tables are prepared for the following:

a. Dry-bulb temperature
b. Wet-bulb temperature
c. Dew-point temperature

5. Cumulative percentage frequency of occurrence of relative humidity - This summary is derived from hourly observations and presents the cumulative percentage frequency of occurrence of relative humidity by increments of 10% classes, plus the mean relative humidity and total number of observations in two tables.

a. Table 1 is prepared by month and annual, all years combined, with month being the vertical argument.

b. Table 2 is prepared by month by standard 3-hour groups, with the hour groups being the vertical argument and a separate page for each month. All years are also combined for this summary.

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY TEMPERATURES

13824 SAVANNAH GEORGIA/HUNTER AAF 48-69
STATION STATION NAME YEARS

MAXIMUM

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM DAILY OBSERVATIONS)

TEMP (°F)	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG.	SEP	OCT	NOV	DEC	ANNUAL
105								.2					.0
100					.3	1.8	.8	1.6					.4
95					5.1	11.5	11.1	14.4	1.9	.2			3.5
90			.6	.8	15.0	38.3	49.5	50.2	14.1	1.4			13.9
85	.1		2.7	8.8	44.4	71.8	90.6	88.2	53.7	9.3	.6		30.4
80	1.8	4.0	12.6	35.3	75.2	94.5	98.9	98.2	81.8	38.9	7.3	1.8	45.3
75	9.8	15.2	27.9	59.7	92.9	99.0	99.7	99.5	95.1	68.9	27.0	8.6	57.8
70	22.9	30.5	47.3	81.2	98.4	99.7	100.0	100.0	98.4	85.5	52.1	22.9	69.4
65	38.6	50.2	65.5	93.8	99.7	100.0			99.8	95.1	71.1	42.7	79.2
60	56.2	66.2	82.4	99.0	99.8				100.0	99.1	85.6	60.7	87.1
55	73.4	80.6	91.6	99.8	100.0					99.6	94.8	78.2	93.0
50	84.3	91.4	96.9	100.0						100.0	98.6	89.6	96.6
45	94.1	96.8	99.2								99.7	96.0	98.8
40	96.1	98.7	100.0								99.8	99.1	99.6
35	99.7	99.8										99.8	99.9
30	100.0	100.0									100.0	100.0	100.0
MEAN	60.9	63.6	68.3	75.8	83.3	87.9	89.3	89.3	84.3	76.2	68.8	61.9	75.9
S.D.	10.295	9.978	9.501	6.970	6.034	5.493	4.138	4.693	5.423	6.742	8.236	9.387	12.978
TOTAL OBS	681	594	621	600	620	600	620	620	616	648	630	651	7501

USAF ETAC FORM JUL 64 0-21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY TEMPERATURES

13824 SAVANNAH GEORGIA/HUNTER AAF 48-69
STATION STATION NAME YEARS

MINIMUM

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM DAILY OBSERVATIONS)

TEMP (°F)	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
80						.5	.5						.1
75					.5	13.3	21.0	21.3	6.2				3.1
70			.2	.5	16.0	63.0	92.1	88.1	50.5	8.3			26.2
65			1.9	11.0	53.5	90.0	100.0	99.5	82.8	24.4	2.2	.5	38.3
60	2.1	4.9	14.3	36.7	78.4	97.5		100.0	95.0	48.5	12.1	4.8	48.9
55	11.3	17.2	25.7	60.7	92.6	100.0			98.9	67.0	26.7	11.2	58.9
50	22.2	27.4	44.4	76.8	98.4				99.8	81.6	41.3	22.0	67.3
45	34.1	43.1	61.8	89.5	99.8					91.2	59.8	34.4	75.7
40	51.5	63.1	76.1	96.3	100.0				100.0	97.2	77.3	52.1	84.3
35	69.9	73.5	91.0	99.7						99.5	90.2	70.2	91.3
33	75.6	84.2	94.5	100.0						99.8	94.4	78.8	93.0
30	84.3	91.8	98.1							100.0	97.6	87.1	96.4
25	94.9	97.3	99.8								99.4	95.4	98.9
20	98.4	99.5	100.0								99.8	99.4	99.7
15	99.9	100.0									100.0	99.8	100.0
10	100.0											100.0	100.0
MEAN	40.6	43.2	47.9	55.5	64.0	70.2	72.8	72.5	68.6	57.8	47.3	40.9	56.8
S D	10.199	10.090	9.600	7.810	5.765	4.227	2.416	2.666	4.839	8.748	9.675	10.252	14.403
TOTAL OBS	681	594	621	600	620	600	620	620	616	648	630	651	7501

USAF ETAC FORM 0-21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY TEMPERATURES

13824 SAVANNAH GEORGIA/HUNTER AAF 48-69
STATION STATION NAME YEARS

MEAN

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM DAILY OBSERVATIONS)

TEMP (°F)	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
90						.8	.3	.5					.1
85					.8	9.8	13.2	15.5	1.5	.2			3.4
80			.2	.2	12.3	49.3	76.3	71.1	27.3	1.7			19.6
75			1.8	6.7	50.2	89.2	[illegible]	97.7	72.6	17.0	.2		35.7
70	1.3	3.2	12.2	35.2	81.8	98.5	[illegible].0	100.0	92.9	41.8	7.8	1.8	47.4
65	9.4	15.2	27.4	61.8	95.5	99.8			98.9	69.3	26.3	9.4	58.8
60	20.7	29.3	44.9	82.3	99.2	100.0			99.7	85.2	45.6	22.0	68.5
55	36.3	45.8	66.0	93.7	100.0				100.0	95.4	67.3	37.2	78.0
50	53.9	66.7	82.9	98.8						98.9	83.5	56.8	86.4
45	72.8	83.3	93.4	100.0						100.0	95.1	78.5	93.4
40	87.7	92.6	98.6								98.4	90.3	97.2
35	96.0	98.5	99.8								99.8	97.5	99.3
30	99.6	99.5	100.0									99.5	99.9
25	100.0	100.0										99.8	100.0
20											100.0	100.0	100.0
MEAN	50.9	53.6	58.4	65.9	74.0	79.3	81.4	81.3	76.7	67.5	58.3	51.4	66.6
S D	9.537	9.338	8.847	6.675	5.112	4.289	2.819	3.232	4.510	7.026	8.261	9.052	13.324
TOTAL OBS.	581	594	621	600	620	600	620	620	618	648	630	551	7501

USAF ETAC FORM JUL 64 0 21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MAXIMUM TEMPERATURE
(FROM DAILY OBSERVATIONS)

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 68-69 YEARS

SINGLE DEGREES FAHRENHEIT

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
[illegible]	72	83	84	88	95	104	96	98	95	82	83	81	102
[illegible]	83	81	83	98	92	96	102	98	93	88	78	78	102
[illegible]	81	81	84	85	94	102	96	98	92		85	77	
[illegible]	74	82	85	87	95	96	98	98	95	94	80	80	98
[illegible]		76	83	81	95	104	104	99	94	90	82	76	
[illegible]	79	78	87	89	100	101	98	100	90	88	80	75	101
54	80	77	91	90	91	104	100	105	97	95	76	74	105
55	77	80	90	88	99	94	95	96	89	85	85	80	96
[illegible]	77	83	84	85	98	95	96	96	94	88	81	82	98
[illegible]	85	84	82	84	91	93	97	99	95	81	82	74	99
[illegible]	65	81	75	93	92	95	97	96	95	89	85	77	97
[illegible]	75	82	78	86	95	101	98	94	93	90	83	73	101
[illegible]	77	69	78	85	95	95	99	94	89	86	82	74	99
[illegible]	70	79	85	86	90	93	98	96	92	84	85	77	98
6[illegible]	77	84	83	87	90	92	95	93	93	91	77	76	96
6[illegible]	73	73	90	90	94	99	95	96	91	89	76	65	99
6[illegible]	72	69	84	89	95	99	93	93	91	86	83	77	99
6[illegible]	77	78	85	86	94	93	93	95	89	87	79	73	98
6[illegible]	75	83	81	88	89	89	96	95	93	80	81	77	96
[illegible]	74	79								85	81	81	
6[illegible]	74	74	85	90	90	92	98	101	91	88	79	77	101
[illegible]	78												
70													
71													
72											84		
73													
MEAN	75.7	78.9	83.9	87.2	93.8	96.6	97.2	97.0	92.6	87.4	81.1	76.4	99.6
S D	4.397	4.498	3.990	2.661	2.764	4.423	2.707	2.938	2.303	3.530	2.862	3.721	2.617
TOTAL OBS	651	596	620	600	620	600	620	620	600	620	630	651	7426

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MAXIMUM TEMPERATURE
(FROM DAILY OBSERVATIONS)

13874 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS

WHOLE DEGREES FAHRENHEIT
/BASED ON LESS THAN FULL MONTHS/

MONTH / YEAR	JAN.	FEB.	MAR	APR.	MAY	JUN	JUL.	AUG	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
5.										85 26			MAX TEMP DAYS
4.	79 31												MAX TEMP DAYS
67			86 1	0	0	0	0	0	87 10				MAX TEMP DAYS
MEAN													
S D													
TOTAL OBS													

USAF ETAC FORM JUL 64 0-88-5 (OL1)

3

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MINIMUM TEMPERATURE
(FROM DAILY OBSERVATIONS)

13024 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS

WHOLE DEGREES FAHRENHEIT

MONTH / YEAR	JAN	FEB	MAR.	APR.	MAY	JUN	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
4	19	30	38	50	53	62	70	65	57	42	41	27	19
4[illegible]	29	37	33	38	53	60	69	69	54	54	30	33	29
5	39	33	20	34	61	63	67	66	57		17	29	
5[illegible]	26	23	34	42	53	64	66	66	63	40	28	26	23
5[illegible]		32	37	29	50	65	68	67	61	33	37	26	
5[illegible]	31	38	40	40	56	62	65	65	61	43	35	22	22
5[illegible]	31	34	30	43	52	54	68	72	64	38	27	27	27
5[illegible]	29	23	28	44	56	38	69	65	65	38	26	25	23
56	24	34	29	42	53	56	67	68	53	52	23	27	23
5[illegible]	17	34	32	40	44	65	68	63	60	32	33	17	17
5[illegible]	21	16	31	43	46	63	67	66	57	39	33	21	16
59	17	30	33	40	50	65	70	70	63	43	23	26	17
6	19	25	22	34	46	57	70	65	62	43	36	19	19
6[illegible]	17	27	34	38	48	57	66	63	58	39	30	20	17
62	17	26	36	35	52	65	68	67	52	35	34	11	11
6	19	27	39	42	44	64	66	66	58	33	31	21	19
64	18	27	28	39	53	64	69	68	55	38	37	27	18
6[illegible]	23	25	33	44	49	60	66	67	63	38	31	24	23
66	12	21	28	35	51	55	66	64	58	42	23	23	12
67	26	18								41	29	27	
6	21	23	28	41	51	62	69	66	59	38	30	21	21
6[illegible]	24												
70	9						60						
71					43								
72							55						
MEAN	22.9	27.6	31.6	40.6	51.6	61.3	67.6	66.5	59.0	40.5	30.3	23.9	17.6
S D	6.472	5.696	4.185	4.123	4.229	3.354	1.603	2.259	3.756	5.826	5.640	4.[illegible]1	4.534
TOTAL OBS	651	594	620	600	620	600	620	620	600	620	630	651	7426

USAF ETAC FORM JUL 64 0-88-5 (OLI)

3

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MINIMUM TEMPERATURE
(FROM DAILY OBSERVATIONS)

138.4 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS

WHOLE DEGREES FAHRENHEIT
/BASED ON LESS THAN FULL MONTHS/

MONTH / YEAR	JAN	FEB	MAR.	APR	MAY	JUN	JUL.	AUG	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
[illegible]										46 28			MIN. TEMP DAYS
[illegible]	29 26												MIN TEMP DAYS
67			36 1	0	0	0	0	0	42 10				MIN. TEMP DAYS
MEAN													
S D.													
TOTAL OBS													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) ALL (MONTH)

 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
106/105														.0				1	1		
104/103												.0	.0	.0	.0	.0		9	9		
102/101									.0		.0	.0	.0	.0	.0			29	29		
100/ 99									.0	.0	.0	.0	.0	.0	.0			67	67		
98/ 97								.0	.0	.0	.0	.0	.0	.0				183	183		
96/ 95				.0		.0	.0	.0	.1	.1	.0	.0	.0	.0	.0			435	435		
94/ 93						.0	.0	.1	.2	.1	.1	.0	.0	.0	.0			936	936		
92/ 91					.0	.0	.2	.2	.2	.1	.1	.0	.0	.0	.0			1531	1531		
90/ 89			.0	.0	.0	.2	.5	.4	.2	.1	.1	.0	.0	.0	.0	.0		2658	2659	1	1
88/ 87			.0	.0	.2	.6	.6	.3	.2	.1	.0	.0	.0	.0				3865	3865		
86/ 85		.0	.0	.1	.5	.9	.5	.3	.2	.1	.1	.0	.0	.0				5112	5112	6	
84/ 83		.0	.1	.4	.6	.7	.4	.3	.2	.1	.0	.0	.0	.0	.0			5651	5652	23	5
82/ 81	.0	.0	.4	1.0	.8	.5	.4	.3	.1	.1	.0	.0	.0					6901	6903	407	17
80/ 79	.0	.2	1.2	1.1	.6	.5	.4	.2	.1	.1	.1	.0	.0	.0				9073	9074	2404	215
78/ 77	.0	.9	1.8	.9	.6	.4	.3	.2	.1	.1	.1	.0	.0			.0		10524	10526	7485	1534
76/ 75	.2	1.9	2.0	.8	.5	.4	.3	.2	.1	.1	.0	.0	.0					12628	12628	13603	6334
74/ 73	.4	2.4	1.6	.7	.5	.3	.3	.2	.1	.1	.0	.0	.0					12741	12741	15155	13842
72/ 71	.4	1.8	1.2	.6	.4	.3	.2	.2	.1	.1	.0	.0						10397	10397	14864	16205
70/ 69	.3	1.5	1.2	.7	.3	.3	.2	.2	.1	.1	.0	.0						9570	9570	12530	13521
68/ 67	.3	1.4	1.3	.5	.4	.3	.2	.2	.2	.1	.0	.0						9147	9147	10558	11169
66/ 65	.3	1.5	1.1	.5	.3	.2	.2	.2	.1	.1	.0							8876	8876	10350	9854
64/ 63	.2	1.0	.9	.5	.3	.2	.2	.2	.1	.0	.0							8259	8260	9775	10036
62/ 61	.3	1.5	.7	.4	.3	.2	.2	.2	.1	.0								7699	7699	9239	9886
60/ 59	.4	1.4	.7	.4	.3	.2	.2	.2	.1	.0								7621	7622	8686	9104
58/ 57	.3	1.1	.6	.4	.3	.2	.2	.2	.0	.0								6482	6487	7706	8177
56/ 55	.3	1.1	.6	.4	.3	.2	.2	.1	.0	.0								6471	6472	7189	6957
54/ 53	.2	.9	.6	.4	.3	.3	.2	.1	.0									5745	5745	6388	6490
52/ 51	.2	.8	.6	.4	.3	.2	.1	.0	.0									5243	5244	6142	5935
50/ 49	.2	.9	.6	.4	.3	.2	.1	.0			.0							5342	5342	6429	5396
48/ 47	.2	.8	.6	.4	.3	.2	.1	.0										4867	4867	6138	5205
46/ 45	.1	.8	.5	.4	.3	.2	.0	.0										4601	4601	6076	5224
44/ 43	.1	.7	.6	.4	.2	.1	.0											3974	3974	5370	4983
42/ 41	.1	.6	.5	.3	.2	.1	.0											3506	3506	5009	4904
40/ 39	.1	.5	.5	.3	.1	.0												3061	3061	4807	4627

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | ALL MONTH

 ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
38/ 37	.1	.5	.4	.3	.1	.0												2432	2432	3865	4224
36/ 35	.1	.4	.3	.2	.0	.0												2029	2029	3336	4266
34/ 33	.0	.4	.3	.1	.0	.0												1594	1594	2616	4019
32/ 31	.0	.3	.2	.1	.0													1198	1200	2225	3750
30/ 29	.0	.2	.2	.0	.0													918	918	1575	3548
28/ 27	.0	.1	.1	.0	.0													589	589	1133	2768
26/ 25	.0	.1	.1	.0														367	367	721	2539
24/ 23	.0	.1	.0	.0														224	224	449	1964
22/ 21	.0	.0	.0	.0														119	119	242	1563
20/ 19	.0	.0	.0															74	74	170	1281
18/ 17	.0	.0	.0															40	40	77	988
16/ 15		.0	.0															16	16	38	742
14/ 13		.0	.0															10	10	20	498
12/ 11		.0																6	6	11	386
10/ 9		.0																1	1	6	223
8/ 7																				1	175
6/ 5																					107
4/ 3																					73
2/ 1																					28
0/ -1																					24
-2/ -3																					22
-4/ -5																					10
-6/ -7																					5
-8/ -9																					1
TOTAL	5.1	26.6	21.7	13.3	9.6	8.0	6.3	4.2	2.6	1.4	.7	.3	.1	.0	.0	.0		192822	192840	192827	192825

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum	1110933831	14184591	73.6	18.705	192820							
Dry Bulb	865722871	12604299	65.4	14.738	192840		157.6	4668.0	3340.1	1480.8	77.1	8760
Wet Bulb	725334967	11535455	59.8	13.521	192827		295.0	3559.0	1815.6	61.2		8760
Dew Point	646075293	10740267	55.7	15.752	192825	2.7	920.1	2909.9	1021.2	3.6		8760

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																				TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85									.0									1	1		
84/ 83									.0	.0								4	4		
82/ 81								.0	.0	.0								8	8		
80/ 79					.0	.0	.0	.0	.0	.0								30	30		
78/ 77				.0	.1	.1	.1	.1	.0			.0						66	66		
76/ 75				.1	.1	.2	.2	.1	.0	.0	.0							120	120		
74/ 73			.0	.1	.3	.3	.2	.1	.0	.0								174	174	1	
72/ 71		.0	.1	.2	.3	.3	.2	.1	.0	.0								226	226	8	1
70/ 69		.0	.2	.4	.3	.2	.2	.1	.1	.0		.0						273	273	34	6
68/ 67		.1	.5	.5	.4	.3	.2	.1	.1	.0	.0							393	393	124	23
66/ 65	.1	.8	.7	.4	.4	.2	.1	.1	.1	.0								529	529	292	76
64/ 63	.2	1.6	.7	.4	.3	.2	.2	.2	.1	.1								705	705	551	288
62/ 61	.3	2.2	.6	.4	.4	.3	.2	.2	.1	.0								836	836	732	584
60/ 59	.7	2.2	.8	.5	.5	.3	.2	.3	.1									960	960	848	753
58/ 57	.6	1.7	.8	.6	.3	.5	.4	.3	.0									895	895	834	773
56/ 55	.6	2.0	.8	.8	.5	.5	.4	.3	.0									1011	1011	786	745
54/ 53	.4	1.7	1.0	.7	.5	.5	.4	.2	.0									932	932	779	675
52/ 51	.3	1.8	1.0	.7	.6	.5	.4	.1										958	958	845	764
50/ 49	.5	1.4	1.1	.8	.8	.5	.4	.0										930	930	928	683
48/ 47	.5	1.8	1.4	1.1	.6	.4	.2	.0										1014	1014	894	706
46/ 45	.5	2.3	1.4	1.1	.5	.5	.1	.0										1087	1087	1118	700
44/ 43	.5	1.8	1.7	.9	.6	.3	.0											997	997	1136	777
42/ 41	.4	1.7	1.5	.9	.4	.3	.0											887	887	1086	870
40/ 39	.5	1.7	1.4	.7	.6	.1												846	846	1169	825
38/ 37	.2	1.6	1.0	.9	.3	.0												695	695	950	820
36/ 35	.3	1.5	1.1	.6	.2	.0												633	633	892	930
34/ 33	.2	1.1	.9	.5	.1	.0												478	478	711	842
32/ 31	.1	1.2	.8	.3	.1													402	402	665	838
30/ 29	.2	1.2	.6	.2	.0													371	371	545	712
28/ 27	.1	.7	.5	.1	.0													250	250	428	581
26/ 25	.1	.6	.2	.0														161	161	300	666
24/ 23	.0	.2	.2	.0														82	82	188	514
22/ 21	.0	.3	.1															69	69	96	453
20/ 19	.0	.2	.1															41	41	80	384

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
18/ 17	.0	.1	.0																21	21	48	310
16/ 15		.0	.0																11	11	15	248
14/ 13		.0	.0																7	7	11	170
12/ 11		.0																	4	4	7	134
10/ 9		.0																	1	1	6	83
8/ 7																					1	65
6/ 5																						37
4/ 3																						29
2/ 1																						15
0/ -1																						11
-2/ -3																						8
-4/ -5																						7
-6/ -7																						2
TOTAL	7.9	33.6	21.4	14.0	9.3	6.4	4.3	2.2	1.0	.3	.0	.0								17108		17106
																			17108		17108	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	> 80 F	> 93 F	Total
Rel. Hum.	96399800	1239242	72.4	19.685	17107							
Dry Bulb	44509758	848232	49.6	11.976	17108		61.8	56.3	17.5	1.1		744
Wet Bulb	37227798	774632	45.3	11.219	17108		103.9	7.3	.0			744
Dew Point	30728096	685214	40.1	13.855	17108	1.2	229.1	1.3				744

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
84/ 83									.0	.0			.0					7	7		
82/ 81					.0		.0	.0	.0	.0		.0						24	24		
80/ 79					.0	.0	.1	.1	.1	.0	.0	.0						58	58		
78/ 77					.0	.1	.1	.1	.3	.0	.0							78	78		
76/ 75				.1	.2	.2	.3	.1	.1	.0	.0	.0						160	160		
74/ 73			.0	.2	.4	.4	.2	.1	.0	.1	.1	.0						238	238	1	
72/ 71		.0	.1	.3	.4	.3	.3	.1	.1	.1	.1	.0						268	268	5	
70/ 69	.0	.1	.3	.4	.4	.3	.2	.1	.2	.1	.0							352	352	35	3
68/ 67	.0	.3	.6	.5	.4	.3	.1	.2	.2	.2	.0							471	471	169	21
66/ 65	.1	1.1	1.0	.6	.4	.3	.2	.2	.3	.1	.0							682	682	380	118
64/ 63	.4	1.7	1.0	.4	.4	.3	.3	.3	.2	.1								783	783	691	369
62/ 61	.6	2.2	1.1	.6	.2	.3	.3	.3	.2	.1								926	926	759	646
60/ 59	.9	2.3	1.0	.6	.5	.5	.4	.3	.2	.0								1056	1056	956	836
58/ 57	.6	1.7	.8	.6	.7	.4	.5	.3	.1	.0								906	906	832	825
56/ 55	.5	1.7	1.0	.7	.6	.5	.5	.4	.0	.0								922	922	776	719
54/ 53	.3	1.3	1.3	.8	.7	.5	.4	.2	.1									865	865	708	624
52/ 51	.4	1.8	1.3	1.0	.7	.5	.3	.2	.0									957	957	795	623
50/ 49	.5	2.2	1.4	.8	.7	.5	.4	.1										1034	1034	1089	695
48/ 47	.5	1.9	1.4	1.1	.8	.4	.1	.0										972	972	1126	724
46/ 45	.4	1.4	1.3	.9	.7	.4	.1	.0										812	812	1073	769
44/ 43	.4	1.5	1.3	.8	.4	.3	.1											743	743	920	761
42/ 41	.5	1.5	1.2	.7	.4	.1												695	695	1013	784
40/ 39	.3	1.3	1.4	.6	.4	.1												627	627	910	799
38/ 37	.2	1.2	.9	.5	.3	.0												490	490	827	734
36/ 35	.2	1.1	.6	.4	.1	.0												389	389	665	863
34/ 33	.2	1.2	.6	.3	.1	.0												369	369	533	752
32/ 31	.1	.8	.5	.2	.0													260	260	471	683
30/ 29	.1	.5	.4	.1	.0													165	165	296	678
28/ 27	.1	.3	.3	.1														119	119	232	474
26/ 25	.1	.2	.1	.1														76	76	131	462
24/ 23	.0	.1	.1	.0														46	46	90	351
22/ 21	.0	.0	.1	.0														20	20	43	298
20/ 19		.0	.1															13	13	31	253
18/ 17		.0	.0															10	10	17	220

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PAGE 2 ALL (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
16/ 15		.0	.0															2	2	13	150
14/ 13																				4	86
12/ 11																					73
10/ 9																					61
8/ 7																					55
6/ 5																					37
4/ 3																					22
2/ 1																					6
0/ -1																					9
-2/ -3																					8
-4/ -5																					2
-6/ -7																					2
TOTAL	7.5	29.4	21.4	13.2	9.8	7.2	5.0	3.2	1.9	1.0	.3	.1	.0				15595		15595		15595
																		15595		15596	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	85567268	1108692	71.1	20.794	15594							
Dry Bulb	44813945	816415	52.4	11.532	15595		30.6	71.4	24.3	2.8		672
Wet Bulb	36935395	740705	47.5	10.614	15596		57.4	9.0	.0			672
Dew Point	30316938	654834	42.0	13.449	15595	.9	169.3	1.0				672

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13874 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 91											.0							2	2		
90/ 89										.0	.0	.0	.0		.0	.0		10	10		
88/ 87							.0	.0	.0	.0	.0	.0	.0	.0				16	16		
86/ 85							.0	.0	.1	.1	.0	.0	.0					37	37		
84/ 83						.0	.0	.1	.1	.1	.0	.0	.0					59	59		
82/ 81					.0	.1	.1	.2	.1	.0	.0	.0	.0					97	97		
80/ 79				.0	.1	.2	.2	.2	.1	.1	.1	.0	.1	.0				170	170		
78/ 77				.0	.2	.4	.2	.2	.2	.1	.1	.1	.0			.0		267	267		
76/ 75			.0	.2	.4	.4	.3	.2	.1	.2	.1	.1	.0					328	328	1	
74/ 73		.0	.1	.3	.5	.3	.2	.3	.2	.2	.2	.1	.0					400	400	19	
72/ 71		.1	.3	.4	.5	.3	.4	.2	.3	.3	.2	.0						482	482	54	2
70/ 69	.0	.4	.8	.7	.4	.5	.3	.3	.3	.4	.1	.0						697	697	245	28
68/ 67	.1	.9	1.2	.5	.5	.3	.3	.4	.4	.3	.1	.0						843	843	500	167
66/ 65	.4	2.0	1.3	.7	.5	.4	.5	.4	.5	.2	.1							1142	1142	775	460
64/ 63	.4	2.3	1.4	.7	.5	.4	.4	.5	.3	.1	.0							1179	1179	944	743
62/ 61	.6	2.5	1.1	.7	.4	.4	.4	.5	.3	.1								1179	1179	1095	977
60/ 59	.7	2.5	1.4	.8	.5	.5	.6	.4	.3	.0								1302	1302	1170	972
58/ 57	.8	1.7	1.4	.5	.5	.5	.6	.4	.2									1091	1091	1160	1047
56/ 55	.5	2.0	1.1	.7	.6	.5	.6	.4	.0									1072	1072	1122	844
54/ 53	.4	2.1	1.1	.6	.7	.7	.5	.2	.0									1076	1076	1124	961
52/ 51	.3	1.6	.8	.7	.6	.5	.4	.1	.0									844	844	1147	912
50/ 49	.4	1.4	.9	.7	.7	.6	.2	.1										852	852	1086	830
48/ 47	.3	1.3	.8	.6	.6	.3	.1	.0										717	717	1036	734
46/ 45	.2	1.2	.7	.8	.5	.4	.1											627	627	994	764
44/ 43	.2	.9	1.0	.6	.5	.2	.0											558	558	887	717
42/ 41	.1	.7	.8	.6	.4	.1	.0											460	460	741	692
40/ 39	.2	.7	.7	.3	.2	.0												378	378	731	668
38/ 37	.2	.5	.6	.3	.1													288	288	570	691
36/ 35	.1	.4	.5	.2	.0													191	191	456	669
34/ 33	.0	.3	.3	.1	.0													132	132	321	675
32/ 31	.0	.2	.2	.0														86	86	234	576
30/ 29		.1	.1	.0														48	48	128	543
28/ 27		.0	.0	.0														12	12	65	470
26/ 25		.0	.0															4	4	31	407

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	> 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PAGE 2 ALL (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
24/ 23			.0															4	4	10	317
22/ 21			.0															2	2	3	269
20/ 19																				3	188
18/ 17																					123
16/ 15																					71
14/ 13																					50
12/ 11																					37
10/ 9																					23
8/ 7																					17
6/ 5																					5
4/ 3																					3
TOTAL	5.7	25.9	18.8	12.5	10.0	8.4	6.4	5.0	3.6	2.1	.9	.5	.2	.0	.0	.0			16652		16652
																		16652		16652	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	86542836	1142396	68.6	22.151	16652							
Dry Bulb	57266353	959461	57.6	10.915	16652		7.0	152.3	61.9	13.8		744
Wet Bulb	46137088	860940	51.7	9.870	16652		21.2	36.6	.9			744
Dew Point	37790217	762465	45.8	13.148	16652		138.5	8.8				744

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-68,70 YEARS | APR MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
94/ 93											.0							1	1		
92/ 91										.0	.0	.0	.0					12	12		
90/ 89									.0	.1	.0	.0	.0	.0				25	25		
88/ 87							.0	.1	.1	.1	.1	.0	.1	.0				72	72		
86/ 85						.0	.0	.1	.2	.1	.1	.1	.1	.0				123	123		
84/ 83					.0	.1	.2	.3	.2	.1	.1	.1	.1	.0	.0			188	188		
82/ 81					.1	.3	.5	.5	.2	.2	.2	.1	.1					333	333		
80/ 79		.0	.0	.1	.4	.9	.8	.4	.4	.2	.2	.1	.0					541	541		
78/ 77			.0	.2	.8	1.0	.7	.5	.3	.2	.3	.1	.0					621	621	1	
76/ 75		.0	.1	.7	1.0	.8	.8	.4	.3	.3	.2	.1	.0					711	711	10	1
74/ 73	.0	.1	.6	1.0	1.0	.7	.7	.5	.3	.3	.2	.1						826	826	96	3
72/ 71		.6	1.2	1.2	.7	.6	.5	.5	.4	.4	.3	.0						966	966	323	37
70/ 69	.1	1.8	1.9	1.5	.7	.5	.6	.4	.4	.3	.2	.1						1305	1305	945	210
68/ 67	.4	2.6	2.0	1.0	.7	.5	.6	.6	.5	.3	.1							1503	1503	1260	735
66/ 65	.7	3.5	2.2	.9	.5	.5	.5	.5	.4	.2	.0							1520	1520	1658	1170
64/ 63	.7	3.4	2.1	1.0	.6	.3	.4	.4	.3	.1								1418	1418	1735	1551
62/ 61	.5	2.7	1.2	.7	.5	.4	.4	.4	.2	.0								1089	1089	1567	1567
60/ 59	.5	2.1	1.2	.7	.6	.4	.3	.3	.1	.0								949	950	1386	1392
58/ 57	.3	1.7	1.0	.5	.4	.3	.3	.2	.1									734	734	1147	1122
56/ 55	.2	1.4	.6	.6	.5	.3	.2	.1	.0									614	614	1023	976
54/ 53	.1	.8	.6	.5	.4	.2	.1	.0										423	423	890	897
52/ 51	.0	.6	.6	.4	.3	.2	.1											336	336	696	687
50/ 49	.1	.6	.6	.4	.2	.1	.0											315	315	697	608
48/ 47	.1	.7	.4	.3	.2	.1												264	264	598	581
46/ 45	.0	.6	.3	.2	.1	.0												197	197	496	592
44/ 43	.0	.2	.3	.1	.1													111	111	311	573
42/ 41	.1	.2	.2	.1														86	86	234	491
40/ 39	.0	.2	.1	.1														56	56	152	434
38/ 37		.1	.0	.0														16	16	85	381
36/ 35		.0	.0															6	6	40	315
34/ 33		.0																1	1	8	306
32/ 31																				6	210
30/ 29																					167
28/ 27																					132

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-68,70 YEARS | APR MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
26/ 25																					96
24/ 23																					57
22/ 21																					36
20/ 19																					21
18/ 17																					12
16/ 15																					1
14/ 13																					2
12/ 11																					1
TOTAL	3.8	24.0	18.0	12.1	9.7	8.3	7.5	6.1	4.3	2.9	1.9	.8	.4	.1	.0			15362	15363	15364	15364

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	80763367	1065721	69.42	21.100	15364							
Dry Bulb	67454878	1007920	65.6	9.299	15363			338.7	161.8	48.6	.0	720
Wet Bulb	54318253	905343	58.9	7.945	15364		.3	123.5	5.0			720
Dew Point	46299186	826814	53.8	10.837	15364		34.9	46.2	.2			720

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAY MONTH

PAGE 1 | ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
100/ 99												.0	.0	.0	.0			7	7		
98/ 97											.0		.0	.0				5	5		
96/ 95										.0	.0	.1	.1	.0	.0			40	40		
94/ 93								.0	.0	.1	.1	.2	.1	.0	.0			81	81		
92/ 91							.0	.0	.1	.2	.2	.1	.1	.1	.0			148	148		
90/ 89							.1	.2	.4	.3	.2	.2	.1					243	243		
88/ 87						.0	.3	.4	.5	.3	.2	.2	.1	.0				330	330		
86/ 85					.0	.5	.7	.7	.7	.3	.3	.2	.1					575	575		
84/ 83			.0	.0	.3	.9	1.0	.8	.5	.3	.2	.2	.0	.0				728	728		
82/ 81			.0	.2	1.0	1.3	1.1	.7	.4	.3	.2	.1	.0					894	894		
80/ 79			.2	.8	1.5	1.5	1.2	.7	.4	.3	.3	.1						1151	1151	6	
78/ 77	.0	.1	.8	1.4	1.5	1.1	.7	.5	.4	.3	.1	.0						1173	1173	82	3
76/ 75	.0	.7	2.2	1.8	1.3	.8	.6	.4	.3	.3	.1	.0						1416	1416	445	21
74/ 73	.1	2.0	3.3	1.9	1.0	.8	.4	.4	.2	.1	.0							1703	1703	1257	262
72/ 71	.3	3.2	3.0	1.5	.7	.4	.3	.2	.1	.0	.0							1637	1637	2205	1048
70/ 69	.8	4.4	2.9	1.2	.5	.4	.2	.1	.1	.0								1777	1777	2764	1918
68/ 67	.7	3.8	2.4	.8	.5	.3	.2	.1	.1	.0								1498	1498	2533	2486
66/ 65	.6	2.7	1.5	.6	.4	.2	.1	.0	.0									1031	1031	2116	2257
64/ 63	.3	1.7	1.0	.7	.3	.1	.1	.0	.0									701	702	1467	1949
62/ 61	.2	1.2	.7	.4	.2	.1	.0	.0										471	471	1143	1462
60/ 59	.2	1.0	.6	.3	.1	.0	.0	.0										377	377	823	1162
58/ 57	.1	.8	.4	.2	.1	.0	.0											283	283	694	963
56/ 55	.1	.5	.3	.2	.1													184	184	472	709
54/ 53	.0	.3	.3	.1	.0		.0											111	111	261	665
52/ 51	.0	.1	.1	.0	.0													57	57	166	307
50/ 49	.0	.1	.0	.0														39	39	140	345
48/ 47	.0	.1	.0															17	17	81	299
46/ 45	.0	.1	.0															16	16	23	256
44/ 43		.0																1	1	13	147
42/ 41																				5	103
40/ 39			.0															1	1		63
38/ 37			.0															1	1		37
36/ 35																				1	20
34/ 33																				1	6

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAY MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
32/ 31																					5
30/ 29																					2
28/ 27																					1
24/ 23																					1
TOTAL	3.5	22.8	19.7	12.4	9.6	8.5	7.1	5.4	4.1	2.9	2.0	1.3	.5	.1	.0			16696	16697	16698	16698

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	> 67 F	≥ 73 F	> 80 F	> 93 F	Total
Rel. Hum	93708677	1211121	72.5	18.734	16697							
Dry Bulb	90025027	1218339	73.0	8.212	16697			397.4	378.5	162.7	5.9	744
Wet Bulb	73816846	1106038	66.2	5.767	16698			414.0	79.8	.0		744
Dew Point	66010828	1042976	62.5	7.199	16698		.4	255.7	12.7			744

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

ALL (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
104/103												.0	.0		.0	.0		6	6		
102/101											.0	.0	.0	.0	.0			19	19		
100/ 99									.0	.0	.1	.0	.0	.0				31	31		
98/ 97								.0	.0	.1	.1	.1	.1	.0				60	60		
96/ 95				.0		.0	.0	.1	.1	.2	.2	.1	.0	.0				120	120		
94/ 93							.1	.2	.3	.2	.2	.1	.0	.0				102	102		
92/ 91					.0	.1	.4	.6	.5	.3	.2	.1						341	341		
90/ 89			.0		.1	.5	1.1	.9	.6	.3	.2	.0						580	580	1	1
88/ 87			.0	.0	.4	1.2	1.6	1.1	.4	.2	.1		.0					788	788		
86/ 85			.0	.2	1.1	2.1	1.5	.6	.4	.2	.1	.0	.0					971	971	5	
84/ 83			.1	1.0	1.9	2.1	.9	.5	.4	.2	.1	.0						1092	1092	7	4
82/ 81		.1	.6	2.2	2.4	1.4	.8	.5	.3	.2	.1	.0						1294	1294	84	4
80/ 79	.0	.4	2.7	3.3	1.9	.8	.6	.2	.2	.1	.0							1573	1573	487	44
78/ 77	.0	1.4	4.8	2.5	1.1	.5	.3	.2	.1	.0								1685	1685	1300	255
76/ 75	.1	3.6	5.4	1.8	.7	.3	.2	.1	.1	.0								1870	1870	2453	962
74/ 73	.3	4.8	4.1	1.1	.5	.2	.1	.1	.0									1723	1723	3102	2274
72/ 71	.7	4.3	2.4	.8	.4	.1	.1	.0	.0									1344	1344	3003	3298
70/ 69	.6	2.6	1.1	.5	.1	.0	.0	.0										778	778	2102	2891
68/ 67	.2	1.0	.9	.2	.1	.0	.0											388	388	1156	2023
66/ 65	.1	.8	.7	.1	.1	.0												277	277	706	1112
64/ 63	.1	.5	.3	.1	.0													144	144	486	800
62/ 61	.0	.2	.1	.1	.0	.0												62	62	261	675
60/ 59	.0	.2	.1	.0	.0													68	68	127	426
58/ 57	.0	.1	.0	.0														24	24	87	250
56/ 55		.0	.0															7	7	43	154
54/ 53																				9	100
52/ 51																				8	64
50/ 49																					49
48/ 47																					22
46/ 45																					9
44/ 43																					9
42/ 41																					1
TOTAL	2.3	19.9	23.4	14.0	10.7	9.5	7.6	5.1	3.4	1.9	1.3	.6	.2	.1	.1	.0		15427	15427		15427
																		15427		15427	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	> 73 F	≥ 80 F	< 93 F	Total
Rel Hum.	90396909	1155673	74.9	15.742	15427							
Dry Bulb	95446351	1208511	78.3	7.087	15427			692.8	575.7	293.8	19.5	720
Wet Bulb	79964451	1108623	71.9	4.381	15427			639.4	347.2	13.1		720
Dew Point	73718425	1063585	68.9	5.038	15427			548.7	165.4	.9		720

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13024 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-69 YEARS — JUL MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
104/103												.0		.0				2	2		
102/101													.0					2	2		
100/ 99										.0	.0	.0						8	8		
98/ 97								.0	.0	.2	.1	.1	.0					57	57		
96/ 95								.1	.2	.3	.1	.0	.0					116	116		
94/ 93						.0	.1	.5	.7	.4	.1	.0	.0					299	299		
92/ 91						.1	.9	1.0	.6	.1	.1	.0	.0					451	451		
90/ 89				.0	.1	.9	2.1	1.3	.4	.2	.1	.0						819	819		
88/ 87				.1	.7	2.7	2.4	.7	.3	.1	.0	.0						1115	1115		
86/ 85			.0	.5	2.4	3.3	1.3	.4	.2	.0		.0						1303	1303		
84/ 83		.0	.4	1.7	2.9	1.6	.4	.2	.1	.0								1168	1168	6	
82/ 81		.1	1.6	4.1	2.0	.6	.2	.1	.0		.0							1381	1381	131	5
80/ 79	.0	.8	5.1	3.6	.9	.2	.1	.0		.0								1703	1703	936	62
78/ 77	.1	3.5	6.4	2.1	.4	.1	.0	.0										2007	2007	2653	524
76/ 75	.6	6.7	5.5	1.2	.2	.0	.0											2261	2261	4171	2216
74/ 73	1.3	7.5	2.9	.5	.0	.0												1949	1949	3640	4520
72/ 71	.7	3.5	1.3	.1	.0	.0												907	907	2690	4311
70/ 69	.3	.9	.6	.1	.0													294	294	1187	2440
68/ 67	.0	.2	.2	.0														69	69	360	1016
66/ 65		.1	.1															17	17	104	435
64/ 63																				37	210
62/ 61																				13	99
60/ 59																					54
58/ 57																					23
56/ 55																					7
52/ 51																					3
50/ 49																					1
48/ 47																					1
TOTAL	3.0	23.3	24.0	13.9	9.7	9.7	7.6	4.4	2.5	1.2	.6	.2	.1	.0				15928	15928	15928	15927

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	99524512	1238402	77.8	14.234	15926							
Dry Bulb	102726257	1275363	80.1	6.175	15928			743.2	683.9	353.0	22.6	744
Wet Bulb	87971410	1182762	74.3	3.000	15928			736.8	538.9	22.0		744
Dew Point	82463233	1144985	71.9	3.077	15927			705.1	342.3	.8		744

FORM 0-26-5 (OU) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | AUG MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
106/105														.0				1	1		
104/103															.0			1	1		
102/101									.0			.0	.0	.0				8	8		
100/ 99									.0	.0	.0	.0	.0	.0	.0			21	21		
98/ 97								.0	.1	.1	.1	.1	.0	.0				60	60		
96/ 95							.0	.1	.3	.2	.2	.0	.0	.0				142	142		
94/ 93							.1	.5	.8	.4	.1		.0					301	301		
92/ 91						.2	.8	1.2	.5	.2	.0	.0						467	467		
90/ 89				.0	.2	.7	1.8	1.4	.4	.2	.0							747	748		
88/ 87				.1	.6	2.0	2.4	.7	.3	.1	.0							983	983		
86/ 85		.0	.1	.5	2.0	2.9	1.4	.6	.2	.1	.0							1220	1220	1	
84/ 83		.0	.5	1.6	2.8	1.5	.6	.3	.1	.0								1200	1201	12	1
82/ 81	.0	.2	1.6	3.3	2.0	.7	.4	.1	.0									1326	1328	190	8
80/ 79	.0	1.1	4.4	3.2	1.0	.5	.2	.0	.0									1681	1682	863	103
78/ 77	.3	3.4	6.1	2.1	.4	.2	.0	.0										1997	1998	2513	635
76/ 75	.9	6.6	5.4	.9	.3	.2	.0											2281	2281	3929	2080
74/ 73	1.3	6.8	3.1	.6	.3	.1												1939	1939	3566	4145
72/ 71	.9	3.4	1.2	.3	.1	.0												920	920	2639	4062
70/ 69	.3	1.4	.7	.2	.0	.0												419	419	1292	2408
68/ 67	.2	.4	.4	.1	.0													180	180	567	1155
66/ 65	.1	.1	.1	.0														41	41	248	659
64/ 63	.0	.1																10	10	95	361
62/ 61																				27	189
60/ 59																				3	96
58/ 57																					34
56/ 55																					9
TOTAL	4.0	23.5	23.5	12.9	9.6	8.9	7.9	5.0	2.8	1.3	.5	.1	.1	.1	.0			15945	15951	15945	15945

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	99769156	1239314	77.7	14.685	15944							
Dry Bulb	102223565	1272893	79.8	6.376	15951			741.6	670.8	342.9	24.9	744
Wet Bulb	87446998	1179652	74.0	3.297	15945			726.6	516.7	24.9		744
Dew Point	81905706	1141454	71.6	3.475	15945			681.1	325.3	1.9		744

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | SEP MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
98/ 97												.0						1	1		
96/ 95								.0	.0	.0	.0	.0	.0					16	16		
94/ 93								.0	.1	.1	.1	.9	.0					63	63		
92/ 91							.0	.2	.2	.1	.1	.0						100	100		
90/ 89						.1	.4	.4	.3	.2	.0	.0						212	212		
88/ 87				.0	.1	.7	1.1	.7	.3	.1	.0	.0	.0					509	509		
86/ 85				.1	.7	1.6	1.1	.7	.4	.1	.0		.0					744	744		
84/ 83			.0	.6	1.8	1.4	.9	.6	.3	.2	.0	.0						909	909		
82/ 81		.0	.6	1.7	1.4	1.1	.8	.6	.2	.0	.0							1013	1013	2	
80/ 79		.4	2.5	3.5	1.2	.9	.7	.3	.1	.1	.0							1359	1359	96	3
78/ 77	.0	2.2	3.6	1.9	1.3	.7	.3	.2	.1	.0	.0							1617	1617	852	94
76/ 75	.7	4.8	4.3	1.7	.8	.6	.3	.1	.1	.0	.0							2085	2085	2257	923
74/ 73	1.4	5.2	3.6	1.4	.6	.3	.2	.1	.0	.0								2008	2008	2781	2284
72/ 71	1.3	4.2	2.6	1.0	.5	.2	.1	.0	.0									1592	1592	2731	2702
70/ 69	.8	2.8	2.1	.9	.3	.2	.1	.0	.0									1134	1134	2104	2387
68/ 67	.6	2.3	2.1	.5	.3	.1	.0	.0	.0									924	924	1501	1854
66/ 65	.3	1.3	1.5	.4	.2	.2	.0	.0	.0									605	605	1181	1483
64/ 63	.1	.9	.6	.3	.1	.1	.0	.0										342	342	785	1188
62/ 61	.0	.4	.3	.2	.2	.0	.0											175	175	547	897
60/ 59	.0	.2	.3	.2	.1	.0												121	121	297	571
58/ 57		.1	.2	.1	.0	.0	.0											58	58	201	386
56/ 55		.1	.1	.0	.0	.0												26	26	149	260
54/ 53			.1	.0	.0													20	20	85	191
52/ 51		.0		.0	.0													7	7	39	152
50/ 49				.0	.0													4	4	17	92
48/ 47					.0													1	1	7	74
46/ 45				.0														2	2	8	49
44/ 43				.0														2	2	2	19
42/ 41				.0														1	1	3	9
40/ 39																				2	10
38/ 37																				3	7
36/ 35																					0
34/ 33																					3
32/ 31																					3

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | SEP MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
30/ 29																					3
TOTAL	5,225	3,024	1,413	1,348	960	811	600	394	232	110	44	10	0					15650	15650	15650	15650

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	99297429	1224115	78.2	15.048	15649							
Dry Bulb	89941683	1181663	75.5	6.781	15650			657.2	489.3	194.7	3.7	720
Wet Bulb	77513275	1098385	70.2	5.204	15650			567.0	275.5	1.0		720
Dew Point	72169701	1058489	67.6	6.081	15650		.3	471.4	152.0			720

FORM 0-26-5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
96/ 95										.0								1	1		
94/ 93									.0	.0	.0	.0						9	9		
92/ 91								.0	.0	.0	.0	.0						10	10		
90/ 89						.0	.0	.0	.0	.0	.0							22	22		
88/ 87					.0	.0	.1	.1	.0	.1		.0						52	52		
86/ 85				.0	.0	.2	.2	.1	.1	.1	.0							129	129		
84/ 83			.0	.1	.2	.4	.3	.3	.2	.1	.0	.0						274	274		
82/ 81			.1	.3	.4	.6	.5	.4	.4	.1	.0	.0	.0					481	481		
80/ 79		.0	.3	.5	.7	.8	.6	.5	.3	.1	.1	.0	.0					642	642	16	3
78/ 77		.4	.7	.6	.7	.5	.7	.4	.2	.1	.1	.0						725	725	84	23
76/ 75	.1	.9	1.2	.9	.8	.6	.6	.4	.3	.1	.1	.0						981	981	334	131
74/ 73	.3	2.0	1.5	.9	.8	.5	.6	.3	.3	.2	.0							1204	1204	663	351
72/ 71	.5	2.6	1.6	1.1	.7	.5	.5	.3	.2	.1	.0							1326	1326	1096	702
70/ 69	.6	3.1	2.1	1.1	.5	.6	.4	.3	.2	.0								1459	1459	1429	1092
68/ 67	.7	2.9	2.1	1.0	.6	.5	.3	.3	.1	.0	.0							1394	1394	1550	1278
66/ 65	.7	2.6	2.0	1.0	.5	.4	.3	.2	.1	.0								1298	1298	1567	1282
64/ 63	.5	2.9	1.7	.9	.6	.3	.3	.2	.1	.0								1207	1207	1376	1278
62/ 61	.5	2.7	1.5	1.0	.5	.2	.1	.1	.0	.0								1088	1088	1398	1365
60/ 59	.4	2.2	1.3	.8	.3	.2	.1	.1	.0									891	891	1328	1239
58/ 57	.2	1.7	1.1	.7	.3	.1	.1	.1										676	676	1081	1202
56/ 55	.2	1.4	1.1	.5	.3	.1	.1	.0										587	587	1020	1036
54/ 53	.1	.9	.9	.6	.1	.1	.0											453	453	799	845
52/ 51	.1	.6	.7	.3	.1	.0	.0											314	314	590	782
50/ 49	.0	.8	.7	.2	.1	.0												309	309	486	640
48/ 47	.0	.6	.4	.2	.1	.0												221	221	455	602
46/ 45	.0	.8	.3	.1	.0													213	213	333	526
44/ 43	.1	.4	.2	.1	.0													143	143	258	479
42/ 41	.0	.3	.2	.1														84	84	171	428
40/ 39	.0	.2	.1	.0														52	52	123	281
38/ 37		.1	.0	.0														24	24	73	199
36/ 35		.1	.0															11	11	30	169
34/ 33		.0	.0															5	5	20	117
32/ 31		.0																2	2	4	90
30/ 29																				3	75

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
28/ 27																						41
26/ 25																						15
24/ 23																						8
22/ 21																						4
20/ 19																						3
18/ 17																						1
TOTAL	5.0	30.1	21.9	13.0	8.0	6.7	5.9	4.3	2.6	1.2	.4	.2	.0						16287	16287		16287
																					16287	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	99086469	1237927	76.0	17.513	16287							
Dry Bulb	73640438	1084060	66.6	9.551	16287		.1	397.8	206.9	60.4	.5	744
Wet Bulb	62541903	999675	61.4	8.523	16287		.3	236.3	50.1	.2		744
Dew Point	56297106	943376	57.9	10.080	16287		10.8	163.5	23.2			744

USAFETAC FORM 0-26-5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
86/ 85								.0	.0	.0								9	9		
84/ 83						.0	.0	.1	.1	.0								22	22		
82/ 81				.0		.0	.1	.1	.0	.0								45	45		
80/ 79				.1	.1	.2	.2	.1	.0	.0	.0							133	133		
78/ 77			.1	.1	.3	.3	.3	.2	.2	.0	.0	.0						236	236		
76/ 75		.0	.1	.2	.3	.4	.3	.2	.2	.1	.0	.0						313	313	3	
74/ 73	.0	.1	.2	.4	.6	.4	.4	.3	.1	.1	.0		.0					429	429	29	3
72/ 71	.0	.3	.5	.6	.6	.4	.3	.2	.3	.1	.0	.0						550	550	102	42
70/ 69	.1	.9	.9	.8	.5	.5	.3	.3	.2	.1	.0							762	762	332	129
68/ 67	.4	1.8	1.3	.8	.6	.4	.3	.4	.3	.1	.0							996	996	631	344
66/ 65	.5	2.1	1.1	.7	.5	.4	.4	.4	.2	.1	.0							1033	1033	907	603
64/ 63	.6	2.0	1.2	.6	.5	.4	.4	.3	.2	.0								993	993	1005	789
62/ 61	.6	2.4	1.2	.7	.4	.5	.4	.3	.2	.0								1063	1063	1025	862
60/ 59	.6	2.1	1.2	.9	.4	.6	.4	.4	.1									1046	1046	1045	947
58/ 57	.6	2.1	1.3	.6	.6	.5	.4	.3	.1									1012	1012	968	914
56/ 55	.5	2.1	1.1	.9	.6	.4	.4	.2	.0									1009	1009	1049	903
54/ 53	.4	1.7	1.3	.9	.5	.4	.4	.1										900	900	1006	905
52/ 51	.4	1.5	1.3	.9	.4	.3	.3	.0										828	828	966	832
50/ 49	.3	1.8	1.6	.6	.5	.4	.2	.0										860	860	1000	745
48/ 47	.3	1.4	1.2	.7	.5	.3	.0											706	706	979	744
46/ 45	.2	1.6	.8	.7	.5	.2	.0											649	649	944	807
44/ 43	.1	1.2	.9	.5	.3	.1												508	508	781	765
42/ 41	.1	1.2	.8	.6	.2	.0												469	469	715	756
40/ 39	.1	1.0	.8	.4	.1	.0												374	374	671	769
38/ 37	.1	.7	.7	.3	.0													281	261	468	624
36/ 35	.0	.7	.6	.1	.0													228	228	416	573
34/ 33	.1	.4	.3	.1	.0													142	142	294	500
32/ 31		.4	.2	.0														104	106	213	461
30/ 29	.0	.2	.2	.0	.0													58	58	131	427
28/ 27	.0	.1	.0	.0														25	25	64	410
26/ 25	.0	.0	.0	.0														20	20	30	314
24/ 23		.1	.1															22	22	19	268
22/ 21		.0	.0															2	2	17	156
20/ 19		.0	.0															3	3	16	81

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM JUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
18/ 17		.0	.0																3	3	3	62
16/ 15																					3	34
14/ 13																					1	12
12/ 11																						18
10/ 9																						12
8/ 7																						7
6/ 5																						4
4/ 3																						2
2/ 1																						1
-2/ -3																						5
-4/ -5																						1
-6/ -7																						1
-8/ -9																						1
TOTAL	6,030	221,4	13,2	9,2	7,4	5,6	4,0	2,1	,7	,1	,0	,0								15835		15833
																			15833		15833	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	89955910	1153378	72,8	19,364	15833							
Dry Bulb	53755862	905608	57,2	11,137	15835		10,9	158,9	54,0	6,3		720
Wet Bulb	64873564	826884	52,2	10,330	15833		22,6	49,9	1,5			720
Dew Point	38308766	752902	47,5	12,677	15833	,4	103,5	23,6	,1			720

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

PAGE 1 | ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
82/ 81							.0	.0										5	5		
80/ 79						.0	.1	.0	.0									32	32		
78/ 77				.0	.1	.1	.1	.0	.0									52	53		
76/ 75				.1	.2	.2	.1	.0		.0		.0						102	102		
74/ 73			.0	.2	.2	.2	.1	.0	.0	.0	.0	.0						148	148		
72/ 71		.0	.1	.3	.2	.2	.1	.1	.0	.0	.0							179	179	8	
70/ 69	.0	.1	.4	.4	.3	.2	.2	.2	.0	.0	.0	.0						320	320	61	9
68/ 67	.1	.6	.8	.4	.3	.3	.2	.1	.1	.1	.0	.0						488	488	207	67
66/ 65	.3	1.4	1.0	.4	.2	.3	.2	.2	.1	.0	.0							701	701	416	199
64/ 63	.4	1.5	.8	.5	.3	.4	.3	.3	.2	.1								777	777	603	510
62/ 61	.4	1.9	.9	.4	.3	.3	.3	.2	.1	.0								810	810	672	563
60/ 59	.7	1.4	.8	.5	.5	.3	.4	.3	.2	.0								851	851	703	656
58/ 57	.6	1.4	.7	.5	.5	.4	.4	.3	.1	.0								803	808	702	638
56/ 55	.6	1.8	1.2	.8	.6	.5	.6	.2	.0									1039	1040	749	595
54/ 53	.4	1.6	1.2	.9	.6	.6	.5	.1										965	965	727	627
52/ 51	.5	1.8	.9	.9	.6	.6	.4	.1										942	943	890	609
50/ 49	.4	1.7	1.3	.9	.9	.6	.3	.0			.0							999	999	986	708
48/ 47	.4	1.7	1.2	1.0	.9	.4	.2											955	955	962	718
46/ 45	.4	1.9	1.3	1.3	.7	.4	.1											998	998	1087	752
44/ 43	.3	1.7	1.5	1.2	.5	.4	.1											911	911	1062	736
42/ 41	.3	1.4	1.6	1.0	.5	.2	.0											824	824	1041	770
40/ 39	.3	1.2	1.7	.8	.4	.1												727	727	1049	778
38/ 37	.2	1.3	1.4	.8	.3	.0												637	637	889	731
36/ 35	.0	1.4	1.3	.6	.1													571	571	836	721
34/ 33	.1	1.3	1.0	.5	.0													467	467	728	818
32/ 31	.0	1.0	.7	.3	.0													344	344	632	884
30/ 29	.1	.8	.6	.2	.0													276	276	472	940
28/ 27	.1	.5	.4	.1														183	183	344	659
26/ 25	.0	.4	.2	.0														106	106	229	579
24/ 23	.0	.3	.1															70	70	142	448
22/ 21	.0	.1	.0															26	26	78	347
20/ 19	.0	.0	.0															17	17	40	351
18/ 17		.0																6	6	9	260
16/ 15		.0																3	3	7	238

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dr Bulb	Wet Bulb	Dew Point
14/ 13		.0																3	3	4	178
12/ 11		.0																2	2	4	123
10/ 9																					44
8/ 7																					31
6/ 5																					24
4/ 3																					17
2/ 1																					6
0/ -1																					4
-2/ -3																					1
TOTAL	6,8	30,4	23,3	14,8	9,6	6,7	4,7	2,2	1,0	,4	,2	,0							16347		16339
																		16339		16339	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	89921498	1168600	71,5	19,708	16340							
Dry Bulb	43916754	825834	50,5	11,592	16347		47,2	60,4	15,5	,7		744
Wet Bulb	36587982	751816	46,0	11,048	16339		89,3	12,6				744
Dew Point	30067091	663573	40,6	13,814	16339	,2	233,8	3,5				744

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) - SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
70/ 69		.0																1	1		
68/ 67			.2															4	4	1	
66/ 65	.3	.5	.6															31	31	7	5
64/ 63	.3	2.5	.3	.0														73	73	41	17
62/ 61	.4	3.6	.6		.2													101	101	76	75
60/ 59	1.1	2.6	.7	.2	.0		.0											99	99	116	97
58/ 57	1.0	2.8	.6	.3	.3	.0												108	108	80	87
56/ 55	.5	2.4	.7	.9	.3		.0											103	103	96	81
54/ 53	.4	2.5	.9	.7	.3													102	102	83	77
52/ 51	.0	3.0	1.3	.4	.4	.0												127	127	86	84
50/ 49	.7	2.5	1.2	.4	.2	.1												109	109	138	94
48/ 47	.3	2.2	1.5	.7	.2	.0												105	105	98	76
46/ 45	.7	3.1	1.4	1.0	.2	.0												141	141	117	119
44/ 43	.7	2.1	2.3	1.3	.3	.0												146	146	122	104
42/ 41	.6	3.3	2.2	1.1	.1													157	157	120	104
40/ 39	.9	3.0	2.0	1.4	.2													161	161	166	108
38/ 37	.4	2.5	1.5	1.4	.4													132	132	148	121
36/ 35	.2	2.1	1.3	.8	.2													101	101	130	112
34/ 33	.0	2.2	1.0	.8	.0													89	89	116	109
32/ 31	.0	2.1	.8	.3	.0													70	70	94	119
30/ 29	.4	1.8	.7	.1														66	66	114	92
28/ 27	.3	1.0	.6	.2														43	43	71	87
26/ 25	.1	.7	.4															25	25	51	93
24/ 23	.1	.3	.4															17	17	19	62
22/ 21		.7	.4															22	22	23	39
20/ 19	.0		.0															2	2	14	53
18/ 17	.1		.1															4	4	9	37
16/ 15																				2	37
14/ 13																				1	12
12/ 11																					9
10/ 9																					8
8/ 7																					11
6/ 5																					7
2/ 1																					1

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	> 80 F	> 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-6-5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STAT'ON | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

PAGE 2 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-2/ -3																					2
TOTAL	10	649	524	111	9 3	5 .3	.1												2139		2139
																		2139		2139	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14386359	172013	80.7	14.618	2139							
Dry Bulb	4691216	97548	45.6	10.652	2139		10.8	.2				93
Wet Bulb	4234032	92214	43.1	10.998	2139		17.3	.0				93
Dew Point	3744942	84910	39.7	13.232	2139	.1	29.1					93

USAFETAC FORM 0-26-5 (OL-I) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
68/ 67			.1															3	3		
66/ 65	.1	1.0	.2															28	28	6	1
64/ 63	.1	1.5	.3															40	40	31	20
62/ 61	.8	3.1	.3	.0														91	91	69	57
60/ 59	1.0	3.8	.6	.2														119	119	95	93
58/ 57	.9	2.4	.4	.3	.1	.1												90	90	99	87
56/ 55	1.1	2.8	.2	.3	.1	.0												97	97	91	92
54/ 53	.5	1.9	1.0	.3	.0	.1												81	81	80	79
52/ 51	.5	3.1	1.4	.4	.2													121	121	65	72
50/ 49	1.1	2.3	.7	.5	.1													101	101	137	87
48/ 47	.6	2.4	1.4	.4	.1													105	105	81	73
46/ 45	.6	3.1	1.4	.3	.2													119	119	114	92
44/ 43	1.1	3.7	1.6	.8	.3													160	160	133	106
42/ 41	.7	2.7	1.9	.9	.1													136	136	113	125
40/ 39	.6	2.8	2.2	.7	.1													138	138	141	91
38/ 37	.7	3.1	1.4	.8	.0													130	130	135	109
36/ 35	.5	2.9	1.7	.6	.1													124	124	142	117
34/ 33	.4	2.2	1.6	.7														104	104	117	108
32/ 31	.4	2.0	1.4	.4	.0													91	91	104	123
30/ 29	.5	2.6	1.1															90	90	104	95
28/ 27	.3	1.8	.6	.1														60	60	102	80
26/ 25	.3	1.3	.5															45	45	74	82
24/ 23	.0	.4	.4															18	18	40	99
22/ 21	.1	.7	.1															19	19	20	66
20/ 19	.0	.6	.1															17	17	21	51
18/ 17	.1	.1	.0															5	5	15	41
16/ 15		.1	.1															5	5	3	28
14/ 13		.0	.0															2	2	4	22
12/ 11																				3	11
10/ 9																					11
8/ 7																					8
6/ 5																					4
4/ 3																					4
2/ 1																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

PAGE 2 0300-0500 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
0/ -1 TOTAL	13.0	54.3	23.0	7.9	1.6	.2													2139		2139
																		2139		2139	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14962356	176504	82.5	13.643	2139							
Dry Bulb	4421796	94302	44.1	11.119	2139		15.3	.1				93
Wet Bulb	4042065	89725	41.9	11.410	2139		21.3					93
Dew Point	3616782	83124	38.9	13.445	2139	.2	31.7					93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

PAGE 1 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
72/ 71				.0														1	1		
70/ 69			.0															1	1		
68/ 67		.0	.0	.0														3	3		
66/ 65		1.0	.2															25	25	7	1
64/ 63	.3	1.8	.4	.1														54	54	34	26
62/ 61	.5	2.2	.5															68	68	55	46
60/ 59	1.1	3.2	.5	.0														103	103	85	71
58/ 57	1.5	1.9	.4	.2	.1													87	87	108	104
56/ 55	1.2	2.7	.4	.2	.0													101	101	89	95
54/ 53	.8	2.2	.9	.2														86	86	74	71
52/ 51	.7	2.6	1.1	.2	.0													101	101	76	69
50/ 49	.9	2.3	1.1	.4	.1													104	104	102	87
48/ 47	1.2	2.9	.9	.6	.1													123	123	116	85
46/ 45	.6	3.1	1.2	.7	.1													121	121	105	99
44/ 43	.7	3.2	1.4	.5	.2													128	128	113	92
42/ 41	.5	2.8	2.1	.7	.1													133	133	114	108
40/ 39	.7	2.5	2.3	.4														128	128	125	89
38/ 37	.3	3.2	1.1	.9														117	117	131	92
36/ 35	.7	3.3	1.5	.4														128	128	142	121
34/ 33	.2	2.3	1.8	.4														102	102	107	113
32/ 31	.2	2.7	1.4	.5														103	103	112	111
30/ 29	.4	3.3	1.0	.2														105	105	107	103
28/ 27	.5	2.6	.6	.0														79	79	121	87
26/ 25	.3	2.0	.4															57	57	83	99
24/ 23	.2	.7	.2															24	24	54	75
22/ 21	.2	.6	.1															18	18	22	89
20/ 19	.0	.6	.1															17	17	24	62
18/ 17	.0	.4																9	9	15	42
16/ 15		.2																4	4	5	22
14/ 13		.1	.1															4	4	4	30
12/ 11		.1																3	3	3	23
10/ 9		.0																1	1	4	8
8/ 7																				1	7
6/ 5																					5

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAF ETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

PAGE 2 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
2/ 1																					2
0/ -1																					1
-2/ -3																					1
-4/ -5																					2
TOTAL	13.	95	6.5	21.8	6.9	.9												2138	2138	2138	2138

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15109903	177619	83.1	12.867	2138							
Dry Bulb	4297147	92653	43.3	11.486	2138		18.4	.2				93
Wet Bulb	3944748	88360	41.3	11.709	2138		24.1					93
Dew Point	3538276	81972	38.3	13.603	2138	.2	33.5					93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
78/ 77						.1	.0											3	3		
76/ 75					.0	.1	.1	.0	.0									8	8		
74/ 73				.2	.4	.2												18	18		
72/ 71		.0	.2	.5	.4	.2	.1											32	32		
70/ 69		.1	.4	1.0	.5	.1	.0		.0									47	47	2	
68/ 67		.4	.8	.7	.7	.2	.1											63	63	18	2
66/ 65	.1	1.1	1.0	.9	.6	.2	.2	.0										89	89	62	16
64/ 63	.2	1.7	1.2	.5	.3	.3	.3	.0										98	98	77	57
62/ 61	.3	1.6	.9	.5	.7	.4	.1	.2										101	101	107	87
60/ 59	.7	2.0	1.0	.5	.7	.6	.1	.1										119	119	107	101
58/ 57	.3	.7	.9	1.1	.6	.3	.3	.1										92	92	93	102
56/ 55	.6	1.7	1.3	1.0	.8	.4	.3											130	130	77	81
54/ 53	.1	1.8	.7	1.0	.9	.6	.3											117	117	108	75
52/ 51	.4	1.2	.8	1.0	1.0	.5	.2											111	111	124	90
50/ 49	.2	1.1	1.1	1.4	1.4	.8	.1											131	131	90	76
48/ 47	.3	1.4	1.3	1.9	1.1	.4	.0											141	141	110	90
46/ 45	.4	2.0	1.6	1.7	.8	.6	.1											153	153	127	82
44/ 43	.4	1.1	1.4	1.4	.9	.3												120	120	153	105
42/ 41	.2	1.1	1.3	1.4	.8	.5												114	114	142	83
40/ 39	.2	1.1	1.3	1.3	.8	.1												104	104	141	125
38/ 37	.1	1.4	1.1	1.6	.6													100	100	118	96
36/ 35	.3	.9	1.3	.9	.3													79	79	110	115
34/ 33	.2	.4	1.2	.7	.0													56	56	87	113
32/ 31	.1	.6	.6	.3														34	34	104	94
30/ 29		.4	.7	.4														33	33	67	83
28/ 27	.0	.1	.6	.1														18	18	39	66
26/ 25		.3	.2															10	10	26	80
24/ 23		.1	.2	.0														7	7	19	61
22/ 21			.1															2	2	8	65
20/ 19			.1															2	2	4	51
18/ 17		.0	.1															3	3	3	43
16/ 15		.0	.0															2	2	3	28
14/ 13			.0															1	1	2	25
12/ 11		.0																1	1	1	16

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
10/ 9																				2	10
8/ 7																					3
6/ 5																					8
4/ 3																					3
2/ 1																					1
0/ -1																					2
-2/ -3																					1
-4/ -5																					1
-6/ -7																					2
TOTAL	5.4	24.4	23.3	22.1	14.3	7.0	2.5	.5	.1										2139		2139
																		2139		2139	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11293874	150396	70.4	17.980	2139							
Dry Bulb	5693095	107637	50.3	11.376	2139		4.9	7.4	1.3			93
Wet Bulb	4759639	98001	45.8	11.229	2139		12.1	.9				93
Dew Point	3911639	86269	40.3	14.219	2139	.3	28.0	.1				93

USAFETAC FORM 0 26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

1200-1400 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83									.0	.0								2	2		
82/ 81								.0	.1	.0								4	4		
80/ 79					.1	.1	.2	.2	.2	.1								22	22		
78/ 77					.2	.4	.4	.3	.1									30	30		
76/ 75				.4	.4	1.1	.8	.3		.0	.0							67	67		
74/ 73			.1	.3	.7	1.4	.9	.4	.1	.0								87	87		
72/ 71			.3	.5	.8	1.1	1.0	.2	.0	.1								87	87	3	
70/ 69		.0	.4	1.0	1.1	.9	.9	.3	.2	.1								105	105	21	1
68/ 67		.4	.7	1.1	1.0	1.1	.8	.5	.6	.1	.0							138	138	53	15
66/ 65	.1	.2	.4	.4	.7	.7	.7	.3	.6	.1								92	92	88	27
64/ 63	.1	.6	.6	.7	.7	.8	.7	.9	.2	.3								122	122	136	48
62/ 61	.1	1.1	.3	.6	.8	.6	.5	.5	.7	.0								111	111	115	86
60/ 59	.1	.7	.7	.7	1.0	.9	.9	.9	.4									134	134	113	102
58/ 57	.0	.7	.2	.4	.5	1.3	1.3	1.3	.0									125	125	110	107
56/ 55	.1	.7	.5	.9	1.0	1.3	1.2	.9	.0									143	143	104	89
54/ 53		.4	.5	.4	1.3	1.3	1.5	.7										128	128	102	101
52/ 51	.3	.8	.3	.6	.9	1.1	1.4	.3										125	125	114	108
50/ 49	.1	.7	.4	.6	1.7	.9	1.3											120	120	120	77
48/ 47	.2	.7	.9	.6	1.1	1.1	.9	.0										115	115	137	88
46/ 45	.3	1.5	.6	.7	.7	1.0	.4											110	110	179	71
44/ 43	.1	.3	.0	.4	.6	.8	.2											63	63	155	86
42/ 41	.1	.5	.3	.4	.4	.5	.0											48	48	131	93
40/ 39	.1	.6	.3	.6	.9	.1												58	58	130	93
38/ 37	.1	.2	.1	.5	.4	.1												30	30	90	83
36/ 35	.1	.3	.1	.4	.2	.0												26	26	73	102
34/ 33	.0	.1	.2	.3	.1													16	16	59	109
32/ 31	.0	.1		.1	.2													10	10	45	76
30/ 29		.1	.1	.2	.1													10	10	19	87
28/ 27			.1	.0	.0													5	5	16	64
26/ 25				.1														2	2	7	86
24/ 23				.1														3	3	10	72
22/ 21																				4	58
20/ 19			.0															1	1	1	50
18/ 17																				3	39

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
16/ 15																					1	36
14/ 13																						20
12/ 11																						20
10/ 9																						13
8/ 7																						12
6/ 5																						3
4/ 3																						6
2/ 1																						4
0/ -1																						3
-2/ -3																						1
-4/ -5																						3
TOTAL	2.3	10.8	8.9	12.6	18.0	18.7	16.1	8.0	3.5	1.2	.1									2139		2139
																			2139		2139	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7769748	121296	56.7	20.387	2138							
Dry Bulb	7315856	122728	57.4	11.320	2139		1.3	23.6	9.2	.7		93
Wet Bulb	5464478	105726	49.4	10.500	2139		4.6	3.3				93
Dew Point	4009336	86980	40.7	14.864	2139	.3	28.4	.7				93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85									.0									1	1		
84/ 83									.0	.0								2	2		
82/ 81								.1		.0								4	4		
80/ 79					.0	.0	.1	.1	.0									8	8		
78/ 77				.1	.2	.3	.3	.4	.1			.0						33	33		
76/ 75				.1	.6	.4	.4	.3	.1	.0	.0							44	44		
74/ 73				.2	1.0	.7	.6	.3	.1	.1								64	64	1	
72/ 71			.4	.7	1.2	1.1	.6	.5	.1	.0								99	99	5	1
70/ 69		.1	.7	.8	1.0	.7	.4	.2	.5	.2		.0						98	98	11	5
68/ 67		.2	.7	1.0	1.1	.9	.5	.4	.4	.1								114	114	50	6
66/ 65	.1	.4	.9	.7	1.2	.9	.2	.6	.6	.2								126	126	85	20
64/ 63	.1	.8	.5	.9	1.2	.6	.7	.6	.5	.4								135	135	107	58
62/ 61	.0	.8	.9	.7	.9	.8	1.1	.7	.4	.1								139	139	127	89
60/ 59	.1	.9	.7	.8	1.4	.7	.5	1.2	.5									147	147	115	92
58/ 57	.2	.6	.7	1.1	.5	1.6	1.1	1.2	.2									154	154	122	100
56/ 55	.2	.7	.4	.7	.8	1.2	1.6	1.0	.3									150	150	124	104
54/ 53	.2	.9	.6	1.4	.9	1.3	1.3	.7	.1									157	157	108	99
52/ 51	.1	.4	.3	.8	1.0	1.0	1.3	.3										112	112	129	110
50/ 49	.0	.6	.3	.9	1.0	1.0	1.2	.2										110	110	129	84
48/ 47	.1	.6	.8	1.0	.6	.8	.9											103	103	139	97
46/ 45	.4	1.5	.6	.7	.6	1.2	.4	.0										115	115	175	65
44/ 43	.1	.4	.7	.4	.3	.7	.1											57	57	182	80
42/ 41	.3	.2	.3	.3	.3	.7												44	44	138	120
40/ 39	.3	.5	.1	.2	.9	.3												48	48	110	104
38/ 37	.1	.1	.1	.1	.1	.2												17	17	88	82
36/ 35	.1	.4	.1	.4	.2													27	27	69	106
34/ 33		.1		.1	.2	.0												10	10	40	88
32/ 31		.2	.0		.2													9	9	35	97
30/ 29		.1			.1													5	5	22	75
28/ 27			.1	.1														5	5	10	54
26/ 25				.1														2	2	8	69
24/ 23																				5	68
22/ 21																				3	65
20/ 19																				2	47

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13024 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
18/ 17																					44
16/ 15																					39
14/ 13																					19
12/ 11																					15
10/ 9																					12
8/ 7																					10
6/ 5																					3
4/ 3																					9
2/ 1																					3
-2/ -3																					2
-4/ -5																					1
TOTAL	2.6	10.6	9.7	14.6	17.4	17.4	13.2	8.7	4.3	1.4	.0	.1							2139		2139
																		2139		2139	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7958421	122545	57.3	20.943	2139							
Dry Bulb	7331629	123217	57.6	10.455	2139		.9	20.3	6.8	.4		93
Wet Bulb	5502831	106375	49.7	9.974	2139		3.7	2.9	.0			93
Dew Point	4051004	87696	41.0	14.598	2139	.1	27.3	.5				93

USAFETAC FORM 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) JAN (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
76/ 75					.0													1	1		
74/ 73				.0	.1	.0	.0											9	5		
72/ 71				.1	.1	.0	.0											7	7		
70/ 69			.4	.3	.0	.0		.0										19	19		
68/ 67		.2	1.1	.9	.3	.3												58	58	2	
66/ 65	.0	1.3	1.6	.6	.3	.0		.1										87	87	31	5
64/ 63	.2	1.8	1.4	.9	.3	.0	.1	.0										103	103	76	41
62/ 61		2.3	1.4	.8	.4	.2	.1		.0									113	113	99	73
60/ 59	.6	2.1	1.9	1.4	.4	.4	.1	.0										139	139	113	106
58/ 57	.2	1.6	1.8	1.0	.3	.3	.3	.1	.0									121	121	110	90
56/ 55	.2	2.1	2.2	1.3	.9	.7	.2	.1										164	164	107	102
54/ 53	.4	1.8	1.6	1.1	.7	.6	.3											139	139	126	93
52/ 51	.2	1.3	1.0	1.2	1.2	.6	.4	.0										139	139	135	117
50/ 49	.3	.8	2.2	1.6	1.4	.7	.3	.0										156	156	103	102
48/ 47	.2	1.3	2.1	2.4	1.2	.4	.0											162	162	116	100
46/ 45	.4	1.6	2.3	1.7	1.0	.6	.2											172	172	156	77
44/ 43	.3	.7	2.6	1.3	1.4	.7	.0											149	149	159	108
42/ 41	.6	.6	1.5	1.2	.8	.2												104	104	174	116
40/ 39	.1	.9	1.0	.7	.9	.1												81	81	160	102
38/ 37	.0	.6	.9	.8	.6													63	63	118	109
36/ 35	.2	.6	1.0	.6	.3													57	57	93	139
34/ 33	.3	.0	.3	.7	.1													32	32	93	104
32/ 31		.3	.2	.7	.0													27	27	57	90
30/ 29	.1	.3	.2	.4														21	21	37	88
28/ 27			.4	.1														11	11	29	54
26/ 25				.1														2	2	24	73
24/ 23		.1	.1	.0														5	5	10	48
22/ 21			.0															1	1	5	26
20/ 19																				5	40
18/ 17																					32
16/ 15																					30
14/ 13																					30
12/ 11																					20
10/ 9																					5

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
8/ 7																					6
6/ 5																					5
4/ 3																					4
2/ 1																					1
0/ -1																					1
-2/ -3																					1
TOTAL	4.	222.	429.	722.	112.9	6.0	2.2	.6	.1									2138	2138	2138	2138

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11424746	151576	70.9	17.820	2138							
Dry Bulb	5751166	108908	51.0	9.610	2138		2.9	3.9	.3			93
Wet Bulb	4843109	99475	46.5	10.026	2138		7.3	.1				93
Dew Point	4006007	87973	41.1	13.442	2138	.1	24.1					93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

PAGE 1 | 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
70/ 69				.1														2	2		
68/ 67			.5															10	10		
66/ 65	.1	1.1	.9	.2	.1													51	51	6	1
64/ 63	.3	1.9	1.2	.3	.1													80	80	49	21
62/ 61	.4	3.1	1.2	.4		.0												112	112	84	71
60/ 59	.7	2.3	.9	.4	.2	.1												100	100	104	91
58/ 57	.8	2.7	1.2	.4	.3	.1												118	118	112	96
56/ 55	.7	2.8	.9	.7	.3	.2	.1											123	123	98	101
54/ 53	.4	2.6	1.8	.6	.2	.1	.0											122	122	98	80
52/ 51	.8	2.1	1.6	.6	.4	.3												122	122	116	114
50/ 49	.3	1.4	1.6	.8	.4	.1	.0											99	99	109	76
48/ 47	.7	2.7	2.2	1.2	.6	.2												160	160	97	97
46/ 45	.6	2.2	2.1	1.8	.4	.3												156	156	145	95
44/ 43	.3	2.9	3.0	1.3	.6	.1												174	174	119	96
42/ 41	.5	2.2	2.2	1.4	.5	.3												151	151	154	121
40/ 39	.6	2.0	2.1	.7	.6	.1												128	128	196	113
38/ 37	.2	1.8	1.6	.9	.4													106	106	122	128
36/ 35	.2	1.7	1.5	.7	.2													91	91	125	118
34/ 33	.2	1.4	1.2	.2	.2													69	69	92	98
32/ 31	.1	1.5	.7	.4														58	58	114	128
30/ 29	.1	.9	.5	.4														41	41	75	89
28/ 27		.6	.7	.1														29	29	40	89
26/ 25		.3	.5	.1														18	18	27	84
24/ 23		.2	.1	.1														8	8	31	32
22/ 21		.1	.2															7	7	11	45
20/ 19	.0		.0															2	2	9	30
18/ 17																				3	32
16/ 15																				1	28
14/ 13																					12
12/ 11																					20
10/ 9																					16
8/ 7																					8
6/ 5																					2
4/ 3																					3

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | JAN MONTH

 2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
2/ 1																					2
TOTAL	8.0	40.4	30.5	13.6	5.4	2.0	.2											2137	2137		2137
																				2137	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13494197	166493	77.9	13.644	2137							
Dry Bulb	5008053	101179	47.3	10.093	2137		7.1	.5				93
Wet Bulb	4436896	94756	44.3	10.497	2137		13.5					93
Dew Point	3850110	86290	40.4	13.086	2137		27.0					93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PAGE 1 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
72/ 71				.1														1	1		
70/ 69		.1	.1	.1														5	5		
68/ 67		.2	.3	.2	.1													13	13	3	
66/ 65	.1	1.3	.8	.2	.1	.1												49	49	11	0
64/ 63	.5	2.3	1.0	.4	.1													82	82	55	23
62/ 61	.6	3.2	1.5	.5	.1		.1	.1										116	116	81	75
60/ 59	2.1	2.7	1.4	.4			.1	.1										132	132	120	116
58/ 57	.9	2.2	1.1	.4	.2	.2	.2											100	100	118	95
56/ 55	.8	2.5	1.2	.4	.5	.1												107	107	94	96
54/ 53	.2	1.6	1.1	.6	.3	.1	.1											76	76	73	93
52/ 51	.6	2.8	1.4	1.4	.2	.1												126	126	74	66
50/ 49	.7	3.2	1.3	.6	.6	.1	.1											129	129	110	78
48/ 47	.6	2.5	2.0	1.2	.8	.1												139	139	135	95
46/ 45	.7	2.2	2.0	.9	.3	.4												126	126	118	96
44/ 43	.4	3.2	2.3	1.2	.5	.2												149	149	116	87
42/ 41	.6	2.1	2.2	.9	.5	.1												122	122	152	111
40/ 39	.5	1.8	1.7	.8	.2													98	98	124	123
38/ 37	.4	2.1	1.2	.8	.2	.1												94	94	113	88
36/ 35	.7	2.1	1.2	.6	.2													92	92	121	126
34/ 33	.3	1.8	1.1	.4	.1													71	71	90	113
32/ 31	.1	1.4	.7	.3	.1													48	48	85	87
30/ 29	.2	.7	.4															25	25	56	82
28/ 27	.3	.6	.2	.1														23	23	46	52
26/ 25	.1	.3	.2	.2														14	14	15	63
24/ 23		.1	.2															6	6	12	51
22/ 21	.1	.1	.3															7	7	11	32
20/ 19																				6	26
18/ 17																				3	22
16/ 15																					12
14/ 13																					5
12/ 11																					9
10/ 9																					2
8/ 7																					7
6/ 5																					7

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	> 67 F	≥ 73 F	> 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
4/ 3																					2
2/ 1																					1
0/ -1																					1
TOTAL	11.2	42.9	26.9	12.3	4.9	1.3	.4	.2											1950		1950
																		1950		1950	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	12967602	156204	80.1	15.27	1950							
Dry Bulb	4717280	93832	48.1	10.18	1950		5.3	.8				84
Wet Bulb	4225288	88434	45.4	10.49	1950		10.1	.1				84
Dew Point	3737057	81657	41.9	12.70	1950	.0	19.9					84

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

 0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																			TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31						
70/ 69			.2															3	3				
68/ 67			.4															7	7				
66/ 65	.1	1.2	.7		.1													39	39	13	5		
64/ 63	.6	2.4	.9		.1													75	75	48	30		
62/ 61	1.2	2.4	1.1	.1														94	94	84	73		
60/ 59	1.4	3.8	1.0	.2	.1	.1												129	129	109	99		
58/ 57	.9	3.0	.7	.3	.1	.1												98	98	119	96		
56/ 55	.8	2.6	.5	.3	.2	.2	.1											88	88	86	112		
54/ 53	.5	2.1	1.0	.5	.3	.1												86	86	66	62		
52/ 51	.4	2.5	1.0	.7	.2													93	93	66	63		
50/ 49	.9	3.2	1.8	.5	.2	.1												129	129	100	81		
48/ 47	1.1	3.2	1.5	.8	.2	.1												134	134	132	90		
46/ 45	.6	3.0	1.6	.6	.4													119	119	125	93		
44/ 43	.8	2.3	2.0	.8	.3	.1												121	121	99	112		
42/ 41	.4	2.9	1.6	.6	.2	.1												112	112	112	88		
40/ 39	.6	3.3	2.8	.7	.3	.1												150	150	131	107		
38/ 37	.5	2.0	1.6	.7	.2													98	98	136	99		
36/ 35	.4	1.9	.7	.7	.2													75	75	112	118		
34/ 33	.8	2.6	1.1	.2														92	92	98	109		
32/ 31	.5	1.9	1.3	.3	.1													79	79	97	95		
30/ 29	.1	1.0	.7	.3	.1													41	41	65	94		
28/ 27	.3	.8	.6	.2														37	37	55	59		
26/ 25	.2	.5	.4	.1														22	22	40	57		
24/ 23	.3	.4	.2															16	16	26	52		
22/ 21	.1	.1	.2															5	5	17	34		
20/ 19		.1	.3															7	7	3	37		
18/ 17		.1																1	1	7	20		
16/ 15																				4	22		
14/ 13																					9		
12/ 11																					6		
10/ 9																					6		
8/ 7																					10		
6/ 5																					7		
4/ 3																					7		

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

PAGE 2 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
2/ 1																					1
-2/ -3																					1
TOTAL	13.	449.	025.6	8.5	2.8	.6	.1											1950	1950	1950	1950

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13597991	160375	82.3	14.335	1949							
Dry Bulb	4443058	90712	46.5	10.702	1950		9.0	.4				84
Wet Bulb	4047810	86198	44.2	11.039	1950		13.5					84
Dew Point	3636308	80170	41.1	13.214	1950	.0	22.3					84

FORM 0-26-5 (OL1) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
70/ 69				.1														1	1		
68/ 67		.3	.3	.1														13	13	1	
66/ 65	.2	.9	.3	.2		.1												30	30	13	9
64/ 63	.7	1.8	.4		.1													58	58	45	30
62/ 61	1.3	3.2	1.0	.2														110	110	80	67
60/ 59	1.4	3.7	.9	.3														124	124	105	98
58/ 57	1.2	2.9	.4	.2														91	91	109	98
56/ 55	.6	2.7	1.0	.5		.1												94	94	96	96
54/ 53	.5	1.7	.9	.3	.2													70	70	64	69
52/ 51	.6	2.3	1.0	.6	.2													88	88	69	63
50/ 49	.8	3.6	2.2	.3	.2													137	137	97	87
48/ 47	.9	3.2	1.5	.7	.2													129	129	114	89
46/ 45	.9	2.4	1.7	.7	.4													117	117	138	99
44/ 43	.8	2.4	1.6	.9	.1	.1												114	114	90	98
42/ 41	.5	2.6	1.6	.9	.2	.1												116	116	114	94
40/ 39	.5	2.8	2.0	.6	.5													124	124	119	98
38/ 37	.3	3.1	1.8	.3	.1													108	108	131	86
36/ 35	.6	2.2	1.3	.6														90	90	112	112
34/ 33	.4	2.6	1.4	.4														92	92	98	106
32/ 31	.4	1.7	1.2	.2														70	70	100	96
30/ 29	.3	1.7	1.1	.4														68	68	64	93
28/ 27	.2	.9	.9	.1														41	41	76	75
26/ 25	.2	.8	.4	.1														29	29	43	59
24/ 23	.1	.4	.2	.1														17	17	35	43
22/ 21		.2	.1	.1														5	5	12	40
20/ 19		.1	.1															3	3	9	35
18/ 17		.2	.3															8	8	4	33
16/ 15		.1	.1															2	2	7	24
14/ 13																				4	14
12/ 11																					8
10/ 9																					8
8/ 7																					5
6/ 5																					0
4/ 3																					6

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	> 80 F	> 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

PAGE 2 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
2/ 1																					2
0/ -1																					2
-2/ -3																					1
TOTAL	13	350	326	0 8	3 1	0	.3												1949		1949
																		1949		1949	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13743913	161459	82.8	13.751	1949							
Dry Bulb	4349086	89546	45.9	10.982	1949		10.5	.4				84
Wet Bulb	3979064	85246	43.7	11.341	1949		15.3	.0				84
Dew Point	3591867	79455	40.8	13.456	1949	.1	23.7					84

FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15	16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
80/ 79							.1					.1							2	2		
78/ 77						.1	.1												4	4		
76/ 75				.1	.2	.1	.1		.1										9	9		
74/ 73				.2	.5	.5	.2												27	27		
72/ 71			.2	.7	.5	.5	.3		.1										44	44		
70/ 69		.3	.7	.7	.7	.5	.2			.1									58	58	4	
68/ 67		.7	1.0	1.0	.7	.7	.1	.4	.1	.1									91	91	26	2
66/ 65	.2	1.5	1.1	1.0	.7	.6	.2	.3	.1										111	111	75	35
64/ 63	.4	1.8	.5	.8	.7	.4	.3	.2	.1										106	106	96	70
62/ 61	.6	2.1	.8	1.0	.5	.2	.4	.2	.1										110	110	109	91
60/ 59	.6	2.0	.5	.8	.7	.7	.4	.1	.1										113	113	111	96
58/ 57	.3	1.1	.9	1.1	.9	.8	.4	.3											112	112	104	94
56/ 55	.3	1.2	.8	.8	1.2	1.1	.3	.2											115	115	93	83
54/ 53	.1	.8	1.8	1.2	.8	.8	.5												119	119	79	66
52/ 51	.4	1.2	1.5	1.3	1.7	.9	.3	.1											142	142	97	76
50/ 49	.5	1.6	1.2	1.3	1.0	.8	.5	.1											136	136	132	99
48/ 47	.6	1.4	1.2	1.5	1.1	.7	.2												130	130	143	96
46/ 45	.3	.9	.7	1.1	1.1	.8	.1												98	98	137	100
44/ 43	.2	.6	1.2	1.1	.6	.6	.1												85	85	116	86
42/ 41	.5	1.1	1.0	1.1	.9	.3													94	94	129	90
40/ 39	.2	.8	1.0	.6	.6														63	63	115	82
38/ 37		.5	.7	.9	.6														52	52	98	104
36/ 35	.1	.3	.5	.7	.4														38	38	73	98
34/ 33	.1	.8	.4	.6	.2														39	39	61	94
32/ 31		.4	.3	.3	.1														20	20	57	70
30/ 29		.1	.4	.1															9	9	38	66
28/ 27			.1	.3															7	7	23	68
26/ 25			.1	.3															6	6	13	62
24/ 23			.1	.1															3	3	5	34
22/ 21		.1	.1																2	2	5	42
20/ 19		.1	.1																2	2	6	32
18/ 17		.1																	1	1	2	26
16/ 15																					2	18
14/ 13																						18

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

 0900-1100 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
12/ 11																					18
10/ 9																					12
8/ 7																					10
6/ 5																					5
4/ 3																					3
0/ -1																					1
-2/ -3																					2
TOTAL	5.1	21.3	19.1	20.7	16.2	10.8	4.4	1.8	.5	.1	.1								1948		1949
																		1948		1949	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	< 80 F	< 93 F	Total
Rel. Hum.	9796931	133003	68.2	19.233	1949							
Dry Bulb	5771121	103923	53.3	10.797	1948		2.2	10.1	1.8			84
Wet Bulb	4743562	93862	48.2	10.706	1949		6.5	1.3				84
Dew Point	3860428	82252	42.2	14.139	1949	.1	21.0	.1				84

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

PAGE 1 1200-1400 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
84/ 83										.1			.1					2	2		
82/ 81							.1	.2	.1	.1		.1						9	9		
80/ 79					.1	.1	.3	.5	.2	.1	.1							26	26		
78/ 77					.2	.6	.7	.4	.2	.1								42	42		
76/ 75				.3	.5	1.1	1.1	.5	.2	.1	.1							75	75		
74/ 73				.5	1.2	1.3	1.1	.5	.1	.3	.3							101	101		
72/ 71		.1	.4	.8	.9	1.0	1.0	.3	.4	.4	.4							106	106	2	
70/ 69		.1	.6	.7	.8	1.0	.8	.6	.6	.5	.1							113	113	21	1
68/ 67	.1	.3	1.1	.6	1.1	.5	.4	.5	.8	.6	.1							116	116	69	14
66/ 65	.2	.9	.8	1.0	.9	.8	.5	.9	.8	.5	.1							142	142	106	24
64/ 63	.1	.8	.8	.4	.1	1.1	.7	.8	.6	.3								108	108	138	72
62/ 61	.1	.7	.3	.6	.5	1.0	1.0	.9	.8	.2								116	116	115	98
60/ 59	.1	.6	.4	.5	.7	1.4	1.2	.9	.4	.1								121	121	129	101
58/ 57	.1	.6	.6	.7	1.2	.7	1.7	.9	.5	.1								134	134	67	91
56/ 55	.2	.5	.6	.6	.8	1.2	1.2	1.5	.2	.1								129	129	100	102
54/ 53	.2	.7	1.3	.5	1.0	1.3	1.1	.5	.2									130	130	105	73
52/ 51	.2	.8	.7	.4	.7	.7	.9	.9										101	101	145	88
50/ 49	.1	.8	.4	.3	.8	.8	.9	.1										80	80	162	65
48/ 47	.4	.7	.5	.3	.6	.8	.6	.2										80	80	137	110
46/ 45	.2	.4	.4	.4	.6	.8	.3											55	55	144	82
44/ 43	.2	.2	.3	.3	.5	.9	.2											50	50	111	74
42/ 41	.3	.4			.4	.2												29	29	97	86
40/ 39	.1	.3		.3	.3	.3												32	32	92	82
38/ 37		.3	.4	.2	.3													20	20	73	75
36/ 35		.2	.1	.1	.1	.1												10	10	49	93
34/ 33	.1	.2	.1	.2	.1													10	10	38	89
32/ 31		.1		.1														4	4	25	75
30/ 29			.1	.1	.1													3	3	10	86
28/ 27			.1															1	1	5	43
26/ 25				.1														2	2	4	58
24/ 23																				3	46
22/ 21																					51
20/ 19																				2	41
18/ 17																					35

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
16/ 15																					24
14/ 13																					14
12/ 11																					18
10/ 9																					10
8/ 7																					8
6/ 5																					3
4/ 3																					3
0/ -1																					3
≤2/ -3																					3
TOTAL	2.3	9.4	10.4	9.6	14.2	17.4	15.5	11.0	6.0	3.1	.9	.1	.1						1949		1949
																		1949		1949	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6871252	107850	55.3	21.533	1949							
Dry Bulb	7231229	116895	60.0	10.633	1949		.4	25.5	11.0	1.1		84
Wet Bulb	5315388	99936	51.3	9.905	1949		2.1	4.0				84
Dew Point	3869474	81952	42.1	14.701	1949	.3	22.8	.6				84

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

 1500-1700 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
84/ 83									.1	.2								5	5		
82/ 81					.1		.1	.1	.3	.2		.1						15	15		
80/ 79					.1		.4	.3	.5	.3		.1						29	29		
78/ 77						.4	.4	.2	.3	.2	.2							31	31		
76/ 75				.1	.8	.7	.7	.3	.3	.1	.2	.3						66	66		
74/ 73			.1	.6	1.2	1.2	.6	.5		.3	.4	.1						94	94	1	
72/ 71			.2	.5	1.2	.9	.7	.3	.4	.7	.1	.1						93	93	3	
70/ 69		.2	.5	1.0	1.0	1.1	.5	.4	.7	.3	.3							116	116	7	2
68/ 67		.3	1.1	1.1	.9	.4	.6	.5	.7	.7	.2							126	126	56	4
66/ 65	.1	.6	1.1	.9	.9	.9	.7	.4	1.0	.6	.1							141	141	109	18
64/ 63	.3	.7	.8	.5	.9	.9	1.0	1.0	.8	.2								136	136	139	72
62/ 61	.1	.7	.6	.5	.3	.9	.9	1.1	.8	.4								120	120	110	86
60/ 59	.1	.6	.4	.7	1.3	1.2	1.2	1.0	1.0	.1								146	146	113	101
58/ 57	.1	.4	.4	.4	1.3	.8	1.5	.9	.6									126	126	72	107
56/ 55	.2	.9	1.1	1.0	1.2	.8	1.5	.9	.1									149	149	113	94
54/ 53	.4	.7	.6	.6	1.2	1.1	.7	1.0	.3									126	126	139	89
52/ 51	.3	.9	.7	.5	.5	1.3	.5	.8	.1									107	107	137	76
50/ 49	.1	.6	.2	.2	.9	1.0	1.4	.3										90	90	187	92
48/ 47	.2	.6	.7	.5	.7	.7	.3	.1										73	73	156	80
46/ 45	.3	.3	.7	.3	.3	.6	.3	.1										54	54	129	82
44/ 43	.1	.4	.3	.3	.1	.2	.1											27	27	128	80
42/ 41	.5	.3	.2	.2	.3	.2												32	32	116	96
40/ 39		.2	.3	.1	.1	.2												16	16	83	105
38/ 37		.2	.1	.3	.3													16	16	66	89
36/ 35		.1	.1			.1												4	4	36	86
34/ 33	.2	.2		.1	.1	.1												9	9	26	86
32/ 31		.1	.1		.1													3	3	13	76
30/ 29																				5	90
28/ 27																				3	72
26/ 25																				1	48
24/ 23																				2	44
22/ 21																					36
20/ 19																					38
18/ 17																					42

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
16/ 15																					26
14/ 13																					11
12/ 11																					4
10/ 9																					9
8/ 7																					9
6/ 5																					5
2/ 1																					2
-4/ -5																					2
-6/ -7																					1
TOTAL	2.7	8.7	9.9	10.4	15.5	15.5	14.0	9.8	7.6	4.3	1.2	.5							1950		1950	
																		1950		1950		

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6792330	107100	54.92	21.609	1950							
Dry Bulb	7311982	117830	60.4	9.926	1950		.1	24.8	10.3	1.7		84
Wet Bulb	5342379	100481	51.5	9.193	1950		1.0	2.9	.0			84
Dew Point	3856657	82285	42.2	14.049	1950	.1	22.2	.3				84

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-70 YEARS — FEB MONTH

PAGE 1 — 1800-2000 HOURS L.S.T.

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
80/ 79									.1									1	1		
78/ 77								.1										1	1		
76/ 75					.2	.1	.2		.1	.1								10	10		
74/ 73				.2	.2	.2	.1	.1		.1		.1						16	16		
72/ 71			.1	.2	.4	.3	.1		.1									21	21		
70/ 69	.1		.7	.6	.3	.1	.2	.1		.1								41	41	3	
68/ 67		.3	1.2	.9	.4	.5		.2	.3	.1								74	74	10	1
66/ 65	.1	1.3	1.6	.9	.8	.2	.1	.2	.2									108	108	37	9
64/ 63	.2	1.5	1.9	1.1	.6	.2	.3	.4	.2	.1								124	124	108	50
62/ 61	.3	2.1	1.7	.8	.3	.5	.4	.3	.1									122	122	87	79
60/ 59	.6	2.1	1.1	1.4	.7	.8	.5	.4	.3									152	152	133	106
58/ 57	.3	1.3	1.6	1.1	1.2	.6	.4	.3	.2									135	135	116	125
56/ 55	.4	1.3	1.6	1.4	.9	.7	.5	.3	.1									136	136	98	71
54/ 53	.3	.9	1.7	1.7	1.2	.7	.5	.2										137	137	95	85
52/ 51	.4	1.3	2.3	1.8	1.3	.8	.6	.1										166	166	121	107
50/ 49	.3	1.6	2.0	1.9	1.1	1.3	.5	.1										171	171	161	92
48/ 47	.2	1.0	1.3	1.6	1.3	.8	.1											123	123	165	67
46/ 45	.1	.6	1.2	2.0	1.4	.7	.2											119	119	134	114
44/ 43	.3	.6	1.2	.7	.8	.3	.1											76	76	136	112
42/ 41	.6	.8	1.2	1.0	.5	.2												84	84	149	114
40/ 39	.1	.4	.8	.7	.6	.1												49	49	129	94
38/ 37		.4	.7	.4	.3													34	34	97	90
36/ 35		.2	.4	.4	.1													21	21	67	117
34/ 33	.1	.5	.1	.1	.1													16	16	43	77
32/ 31			.1	.1	.1													5	5	34	78
30/ 29		.2	.1	.1	.1													6	6	13	91
28/ 27				.1														1	1	7	53
26/ 25			.1															1	1	3	51
24/ 23																				2	44
22/ 21																				2	34
20/ 19																					25
18/ 17																					22
16/ 15																					16
14/ 13																					4

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	> 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
12/ 11																					3
10/ 9																					3
8/ 7																					3
6/ 5																					1
0/ -1																					1
-2/ -3																					1
-6/ -7																					1
TOTAL	4.1	18.2	24.8	21.0	14.6	8.7	4.5	2.5	1.3	.4		.1						1950		1950	
																	1950		1950		

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9830297	133365	68.4	19.017	1949							
Dry Bulb	5873484	105546	54.1	9.080	1950		.6	7.1	1.2	.0		84
Wet Bulb	4614549	95223	48.8	9.190	1950		2.6	.6				84
Dew Point	3909611	83789	43.0	12.598	1950	.1	18.6	.0				84

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) FEB (MONTH)

 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
72/ 71					.1													1	1		
70/ 69			.2	.4	.3													15	15		
68/ 67		.5	.8	.3	.1			.1										31	31	4	
66/ 65	.1	.9	1.5	.3	.3	.1		.1	.1									62	62	16	10
64/ 63	.3	2.4	1.2	.3	.5	.1		.1	.1									94	94	62	22
62/ 61	.6	3.5	1.6	.9	.2	.1	.1	.2										138	138	93	77
60/ 59	1.2	2.7	1.9	.6	.4	.2	.2	.1										139	139	128	119
58/ 57	1.1	2.1	1.0	.5	.5	.4	.1											110	110	127	119
56/ 55	.7	1.8	1.3	.7	.2	.4	.2											104	104	96	75
54/ 53	.4	1.9	1.5	1.4	.7	.3	.1											121	121	87	87
52/ 51	.5	2.4	1.7	1.1	.6	.4	.2											134	134	86	84
50/ 49	.5	3.1	2.3	1.0	.9	.3	.2											162	162	140	101
48/ 47	.3	2.4	2.2	2.2	1.1	.3												104	104	144	[illegible]
46/ 45	.4	1.9	1.7	1.0	1.0	.3	.1											124	124	148	103
44/ 43	.2	2.0	1.7	1.3	.7	.3												121	121	124	112
42/ 41	.3	1.9	1.6	.9	.5	.2												106	106	144	105
40/ 39	.4	1.1	2.0	.8	.5	.2												95	95	117	108
38/ 37	.4	1.0	1.1	.6	.5													68	68	113	98
36/ 35	.1	1.5	1.0	.4	.1													59	59	95	113
34/ 33	.1	.9	.8	.3														40	40	79	78
32/ 31		1.0	.5	.2														31	31	60	106
30/ 29	.1	.2	.4	.1														13	13	45	76
28/ 27	.1	.2	.2															9	9	17	52
26/ 25		.1		.1														2	2	12	64
24/ 23			.2	.1														4	4	5	37
22/ 21			.1															1	1	1	29
20/ 19			.1															1	1	5	19
18/ 17																				1	20
16/ 15																					8
14/ 13																					11
12/ 11																					7
10/ 9																					3
8/ 7																					3
6/ 5																					3

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEURGIA/HUNTER AAF STATION NAME | 48-70 YEARS | FEB MONTH

2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
4/ 3																					1
0/ -1																					1
TOTAL	7.5	35.4	28.3	15.1	8.9	3.2	1.0	.4	.1									1949	1949	1949	1948

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum.	11966952	149336	76.6	16.410	1949							
Dry Bulb	5116705	98131	50.3	9.502	1949		2.6	2.0				84
Wet Bulb	4467355	91325	46.9	7.827	1949		6.3	.2				84
Dew Point	3855536	83244	42.7	12.377	1948	.0	19.0					84

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
74/ 73			.0		.0		.0	.0										4	4		
72/ 71		.0	.0	.1	.0		.1											7	7	1	
70/ 69		.3	.5	.1	.0	.0	.0											23	23	3	1
68/ 67	.2	1.9	1.4	.2		.0												76	76	21	11
66/ 65	.9	2.8	1.9	.5	.1	.1	.0	.1										132	132	75	50
64/ 63	.5	3.0	1.4	.4	.2	.2	.1	.0										121	121	107	80
62/ 61	1.0	3.7	1.9	.6	.0	.1	.1											153	153	138	130
60/ 59	1.0	3.1	2.0	.5	.3	.6	.0	.0										156	156	131	117
58/ 57	.8	2.3	1.2	.6	.1	.1	.4	.0										116	116	142	135
56/ 55	.7	4.1	1.7	.3	.5	.2	.4	.1										165	165	104	95
54/ 53	.8	3.9	1.9	.7	.7	.5	.3											171	171	156	126
52/ 51	.5	3.0	1.4	.4	.4	.3	.0											130	130	145	146
50/ 49	.6	3.0	.9	1.3	.6	.6												143	143	125	120
48/ 47	.3	2.2	1.2	.6	.5	.1												101	101	121	98
46/ 45	.3	2.1	1.5	1.0	.7	.2												119	119	127	105
44/ 43	.1	1.8	2.0	.7	.7	.1												110	110	114	85
42/ 41	.1	1.2	1.1	1.0	.7													82	82	100	72
40/ 39	.2	1.4	1.4	1.1	.5													93	93	126	94
38/ 37	.0	.9	1.2	.6	.1													60	60	67	80
36/ 35	.2	.6	.6	.3														36	36	98	83
34/ 33		.5	.3	.2	.0													24	24	68	71
32/ 31		.4	.4	.0														18	18	41	70
30/ 29		.2	.0															5	5	20	73
28/ 27			.0															1	1	15	60
26/ 25			.0															1	1		43
24/ 23			.0															1	1	2	29
22/ 21																				1	27
20/ 19																					26
18/ 17																					12
16/ 15																					2
14/ 13																					3
12/ 11																					4
TOTAL	8.2	42.4	25.5	11.7	6.5	3.5	1.7	.4										2048	2048	2048	2048

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13450539	162569	79.4	10.331	2048							
Dry Bulb	5921962	108456	53.0	9.337	2048		1.2	5.0	.2			93
Wet Bulb	5269194	101890	49.8	9.886	2048		3.6	1.1				93
Dew Point	4696549	94727	46.3	12.407	2048		15.8	.5				93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

PAGE 1 | 0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≤ 31		Dry Bulb	Wet Bulb	Dew Point
72/ 71			.1															2	2		
70/ 69		.4	.3	.0	.0	.1												20	20		
68/ 67	.1	1.0	.5	.1	.0	.0												39	39	18	13
66/ 65	.8	2.6	1.2	.0	.1													99	99	61	46
64/ 63	.8	3.6	1.7	.4	.1		.0											135	135	81	70
62/ 61	1.2	4.0	.6	.4	.0	.0	.0											130	130	145	108
60/ 59	1.4	3.6	1.6	.1	.1	.1		.0										144	144	137	145
58/ 57	1.5	2.7	1.7	.3	.5	.2												142	142	129	123
56/ 55	1.2	3.1	.8	.5	.4	.1	.0											124	124	120	88
54/ 53	.8	3.6	1.0	.8	.6	.1												142	142	116	125
52/ 51	.8	3.2	1.1	.8	.5	.1	.0											134	134	125	131
50/ 49	.8	2.7	1.1	.9	.6	.3												129	129	125	99
48/ 47	1.0	3.0	.7	.5	.7	.3												127	127	125	93
46/ 45	.5	1.9	1.0	.8	.8	.1												105	105	116	95
44/ 43	.3	2.5	2.1	.7	.6													129	129	102	90
42/ 41	.4	2.3	1.9	.7	.5													118	118	110	105
40/ 39	.1	1.6	1.3	.9	.3													87	87	122	80
38/ 37	.3	1.2	1.5	1.1	.2													87	87	116	85
36/ 35		.9	1.5	.6	.0													61	61	72	83
34/ 33	.1	.6	.7	.2														34	34	80	98
32/ 31	.2	.7	.6	.1														34	34	66	54
30/ 29		.5	.4	.1														21	21	43	74
28/ 27		.1																3	3	23	62
26/ 25		.0																1	1	12	62
24/ 23			.1															3	3	1	29
22/ 21																				2	42
20/ 19																				1	20
18/ 17																					12
16/ 15																					9
12/ 11																					8
10/ 9																					1
TOTAL	12.4	45.8	23.5	9.9	6.4	1.8	.2	.0											2050		2050
																		2050		2050	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	14152767	167453	81.7	15.217	2050							
Dry Bulb	5567832	104932	51.2	9.799	2050		2.8	2.8				93
Wet Bulb	5046041	99443	48.5	10.409	2050		6.7	.8				93
Dew Point	4560967	93119	45.4	12.713	2050		16.9	.6				93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

 0600-0800 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																			TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
76/ 75				.0														1	1		
74/ 73			.1	.0														3	3		
72/ 71		.0	.3	.1														10	10		
70/ 69		.8	.5	.0														27	27	7	
68/ 67	.1	1.3	.4	.2		.0												43	43	28	19
66/ 65	.7	2.6	1.1	.3	.2		.0											106	106	72	56
64/ 63	.8	3.7	1.4	.5	.0	.0												135	135	85	84
62/ 61	.8	3.4	1.0	.3	.0													117	117	131	103
60/ 59	1.4	3.4	2.1	.1	.0		.0											151	151	125	123
58/ 57	1.2	2.9	2.0	.3	.2	.1												143	143	144	113
56/ 55	.9	2.9	1.2	.6	.2	.2	.1											128	128	142	115
54/ 53	.5	3.5	1.6	.5	.7	.2	.0											149	149	106	134
52/ 51	.4	2.2	1.4	.9	.4	.1	.1											117	117	110	126
50/ 49	1.0	3.0	1.9	.8	.5	.2												158	158	123	93
48/ 47	.7	2.1	1.0	1.0	.6	.2												131	131	137	106
46/ 45	.2	2.2	1.1	1.1	.3													106	106	127	99
44/ 43	.5	2.0	1.4	1.1	.6													117	117	118	98
42/ 41	.1	1.5	1.7	1.2	.5	.0												105	105	97	99
40/ 39	.4	2.0	1.5	.8	.1													101	101	113	84
38/ 37	.2	1.0	1.2	1.1	.1													79	79	111	78
36/ 35	.2	.8	1.4	.5	.1													62	62	87	91
34/ 33	.0	1.2	1.1	.2														56	56	76	71
32/ 31	.0	.7	.5	.0														27	27	78	86
30/ 29		.2	.5	.2														19	19	44	74
28/ 27			.1	.0														8	8	18	63
26/ 25			.0															1	1	15	53
24/ 23																				6	55
22/ 21			.1															2	2		24
20/ 19																				2	18
18/ 17																					15
16/ 15																					8
14/ 13																					3
12/ 11																					4
10/ 9																					4

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

PAGE 2 | 0600-0800 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
8/ 7																						3
TOTAL	10	343	827	312	3 4,9	1,2	,3												2102	2102		2102

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14328249	170773	81,2	14,702	2102							
Dry Bulb	5746759	107879	51,3	10,002	2102		2,5	3,7	,2			93
Wet Bulb	5193657	102089	48,6	10,586	2102		7,2	1,5				93
Dew Point	4690712	95554	45,5	12,851	2102		18,1	,8				93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

 0900-1100 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83							.0			.0		.0						3	3		
82/ 81						.1	.0	.1										5	5		
80/ 79					.1	.1	.2	.1	.0	.1								16	16		
78/ 77				.1	.5	.6	.5	.0	.0	.1	.1	.0						41	41		
76/ 75			.0	.5	1.0	.6	.2	.2	.2	.1	.0	.0						65	65		
74/ 73		.0	.3	.9	.8	.7	.3	.2	.0	.1	.0							76	76		
72/ 71		.1	.8	1.1	1.0	.7	.5	.4	.2	.1								106	106	13	
70/ 69		.4	1.4	1.5	.9	.8	.4	.4	.4	.2	.0							135	135	43	6
68/ 67	.1	.6	1.5	1.0	1.3	.6	.6	.5	.5	.2								146	146	102	35
66/ 65	.1	1.2	.9	1.0	1.0	.9	.9	.8	.7	.1								163	163	132	74
64/ 63	.2	1.3	1.4	1.0	.8	.8	.6	.8	.2	.0								154	154	124	123
62/ 61	.4	1.4	1.0	1.0	.8	.9	.9	.5	.3	.0								155	155	121	101
60/ 59	.2	1.3	.9	1.2	1.1	1.2	1.1	.6	.1									165	165	152	110
58/ 57	.3	1.6	1.0	.7	.6	1.0	1.1	.5	.1									146	146	134	129
56/ 55	.1	1.2	.9	.9	.8	.7	.8	.4	.0									128	128	160	120
54/ 53	.1	.9	1.1	.6	.9	1.2	.8	.3	.0									125	125	149	112
52/ 51	.1	.7	.4	.6	.9	.9	.6	.0										89	89	135	98
50/ 49	.2	.5	.6	.4	1.1	.9	.5	.1										91	91	155	100
48/ 47		.3	.4	.7	.8	1.2	.2											79	79	102	100
46/ 45	.1	.5	.2	.8	.9	.8	.2											76	76	115	85
44/ 43	.1	.3	.1	.5	.9	.5	.0											54	54	106	87
42/ 41	.0	.3	.2	.7	.5	.2	.0											43	43	91	96
40/ 39	.1	.2	.2	.3	.5	.0												29	29	89	83
38/ 37	.1	.1	.1	.2	.2													16	16	84	75
36/ 35		.1	.1	.2	.1													12	12	50	68
34/ 33			.0	.1	.0													5	5	32	94
32/ 31			.0	.1														3	3	19	72
30/ 29			.0															1	1	9	61
28/ 27																				8	60
26/ 25																				2	66
24/ 23																					40
22/ 21																					43
20/ 19																					28
18/ 17																					23

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITION OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

 0900-1100 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
16/ 15																					13
14/ 13																					10
12/ 11																					9
10/ 9																					3
8/ 7																					2
6/ 5																					1
TOTAL	2.5	13.0	13.9	16.1	17.8	15.6	10.7	6.0	2.9	1.1	.2	.1						2127	2127	2127	2127

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9103613	132335	62.2	20.231	2127							
Dry Bulb	7831058	127314	59.9	9.951	2127		.2	25.9	9.0	.7		93
Wet Bulb	6119564	112138	52.7	9.880	2127		1.7	6.9				93
Dew Point	4093682	97020	45.6	13.857	2127		18.8	1.8				93

FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

 | 1200-1400 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
90/ 89										.0		.0	.0		.0			4	4		
88/ 87									.0		.0	.0	.0	.0				5	8		
86/ 85							.1	.1	.2	.2	.0	.0	.0					16	16		
84/ 83						.0	.2	.3	.5	.3	.0	.0	.1					32	32		
82/ 81					.1	.3	.5	.8	.3	.1	.1	.1	.1					53	53		
80/ 79					.2	1.0	.9	.7	.3	.3	.3	.1	.1	.0				87	87		
78/ 77				.1	.7	1.5	.8	.6	.6	.4	.3	.1	.2					111	111		
76/ 75				.4	.9	1.3	1.2	.6	.3	.6	.1	.1	.0					118	118		
74/ 73			.1	.4	1.2	.8	.7	.8	.5	.7	.3	.3	.0					125	125	11	
72/ 71			.5	.4	.9	.6	.8	.8	1.0	.6	.7	.2						138	138	23	1
70/ 69		.2	.5	.8	.9	1.2	.7	1.0	.6	1.2	.4							161	161	95	10
68/ 67	.1	.3	.6	.7	.8	1.0	.8	1.4	1.5	.9	.4							178	178	125	31
66/ 65	.2	.7	.8	.5	.6	.5	1.0	.9	1.4	.7	.1							155	155	131	81
64/ 63	.2	.7	.8	.5	.6	.7	.9	1.0	.9	.4	.1							142	142	136	95
62/ 61	.2	.8	.5	.8	.4	.4	.8	.8	.8	.2								123	123	144	125
60/ 59	.4	.9	.5	.6	.4	.7	.9	1.4	.8	.2								145	145	152	139
58/ 57	.3	.8	.5	.5	.5	.6	1.0	.8	.4									117	117	143	108
56/ 55	.1	.4	.3	.3	.2	.9	1.1	1.2	.2									102	102	161	100
54/ 53	.1	.5	.1		.3	.8	1.0	.5	.1									77	77	148	94
52/ 51	.1	.5	.0	.1	.3	.5	1.3	.2										66	66	158	98
50/ 49	.1	.6	.1	.2	.5	.7	.3	.3										61	61	135	96
48/ 47	.0	.1	.2	.0	.2	.4	.2	.1										28	28	125	70
46/ 45	.1	.4	.1	.3	.0	.6	.1											36	36	116	84
44/ 43			.3	.0	.2	.2	.0											17	17	94	94
42/ 41	.1		.1	.1	.1	.0												11	11	85	73
40/ 39	.1		.1		.2													8	8	65	72
38/ 37	.2	.0		.1														8	8	30	88
36/ 35	.0	.0																2	2	29	84
34/ 33																				14	96
32/ 31																				6	80
30/ 29																					76
28/ 27																					63
26/ 25																					61
24/ 23																					55

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
22/ 21																					43
20/ 19																					29
18/ 17																					26
16/ 15																					11
14/ 13																					17
12/ 11																					5
10/ 9																					6
8/ 7																					5
6/ 5																					2
4/ 3																					2
TOTAL	2.4	7.1	6.1	6.9	10.4	14.7	15.5	14.4	10.6	6.8	3.0	1.3	.8	.1	.0			2126	2126	2126	2126

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6643884	109652	51.6	21.567	2126							
Dry Bulb	9302648	139016	65.4	10.002	2126			45.0	24.1	6.9		93
Wet Bulb	6590405	116735	54.9	9.221	2126		.3	11.1	.5			93
Dew Point	4738627	95617	45.0	14.361	2126		21.0	1.8				93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 91											.1							2	2		
90/ 89											.1	.1			.0	.0		6	6		
88/ 87							.0	.0		.0	.1	.2	.0					11	11		
86/ 85								.0	.1	.5	.1	.0	.0					19	19		
84/ 83								.1	.6	.2	.1	.0						21	21		
82/ 81					.0	.0	.2	.2	.5	.1	.2	.1	.0					31	31		
80/ 79				.0	.1	.7	.5	.4	.2	.1	.1	.0	.3					53	53		
78/ 77				.1	.7	1.4	.3	.5	.5	.4	.1	.6	.0			.0		99	99		
76/ 75				.5	1.4	1.0	.4	.7	.5	.4	.5	.1	.1					119	119	1	
74/ 73			.3	.9	1.1	.8	.4	.8	.7	.5	.7	.6						143	143	7	
72/ 71		.0	.3	.5	1.0	.7	1.0	.3	.8	1.1	.3	.1						127	127	12	1
70/ 69	.0	.1	.5	1.3	.7	1.2	.7	.8	.8	1.0	.3	.1						162	162	79	9
68/ 67		.4	1.0	.7	.8	.4	.7	.8	1.2	.9	.6	.0						158	158	124	30
66/ 65	.2	.8	1.0	1.0	.6	.8	1.0	1.1	1.2	.4	.3							177	177	132	72
64/ 63	.3	1.2	.7	.6	.8	.9	1.0	1.3	1.0	.4	.1							172	172	127	92
62/ 61	.3	.8	1.1	.4	.5	.7	.6	1.6	1.2	.5								160	160	140	141
60/ 59	.1	1.1	.8	.6	.7	.9	1.2	.9	.9	.1								150	150	165	111
58/ 57	.5	.5	.7	.3	.6	1.0	1.2	1.2	.5									138	138	144	129
56/ 55	.1	.5	.4	.3	.8	.8	.7	.8	.0									92	92	161	95
54/ 53	.1	.6	.1	.2	.4	.6	.5	.5	.2									68	68	164	113
52/ 51	.2	.4	.0	.2	.3	.8	.2	.4	.1									57	57	171	97
50/ 49		.3	.3	.2	.2	.8	.2	.0										45	45	136	78
48/ 47	.0	.4	.2	.1	.2	.4	.3	.1										41	41	155	65
46/ 45	.1	.2	.2	.0	.2	.2												20	20	124	106
44/ 43			.1	.1	.1	.0												9	9	97	74
42/ 41	.0	.0	.0	.1	.0	.1												8	8	60	71
40/ 39	.1	.2	.1															10	10	44	94
38/ 37		.1																3	3	35	110
36/ 35		.0																1	1	20	101
34/ 33																				2	92
32/ 31																				2	78
30/ 29																					73
28/ 27																					49
26/ 25																					49

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL-I) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

PAGE 2 | 1300-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
24/ 23																					42
22/ 21																					40
20/ 19																					28
18/ 17																					19
16/ 15																					17
14/ 13																					7
12/ 11																					5
10/ 9																					5
8/ 7																					6
6/ 5																					2
4/ 3																					1
TOTAL	2.3	7.7	8.1	8.1	11.2	14.3	11.2	12.7	11.1	6.7	3.7	2.1	.6		.0	.1			2102		2102
																		2102		2102	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6877853	110647	52.6	22.393	2102							
Dry Bulb	9145160	137242	65.3	9.370	2102			42.1	22.3	5.1		93
Wet Bulb	6515963	115611	55.0	8.642	2102		.1	9.9	.4			93
Dew Point	4714918	95150	45.3	13.929	2102		18.6	1.8				93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85									.0			.0						2	2		
84/ 83							.0	.0		.0								3	3		
82/ 81						.0		.2	.1		.0							5	8		
80/ 79					.0	.0		.1	.2	.0	.0							12	12		
78/ 77						.0	.3	.2	.0	.2								15	15		
76/ 75				.1	.0	.1	.1	.2	.1	.1	.0	.1						19	19		
74/ 73			.2	.4	.4	.3	.2	.1	.2		.1							42	42	1	
72/ 71		.1	.6	1.0	.4	.3	.4	.2	.2	.2	.2							77	77	2	
70/ 69		.5	1.5	1.2	.4	.4	.1	.4	.3	.4								108	108	14	
68/ 67		.6	2.0	1.1	.7	.5	.3	.2	.3	.2	.0							124	124	59	20
66/ 65	.0	2.1	1.8	1.1	1.0	.6	.4	.4	.6	.2	.0							172	172	93	46
64/ 63	.2	2.0	2.0	1.3	.9	.5	.5	.5	.3	.1								171	171	149	96
62/ 61	.5	2.4	1.4	1.0	.9	.7	.6	.7	.4	.1								178	178	133	134
60/ 59	.2	2.3	1.6	1.8	1.2	.7	.9	.4	.4	.0								196	196	161	105
58/ 57	.8	1.1	1.8	1.0	1.0	.7	.4	.6	.2									156	156	164	163
56/ 55	.2	1.2	2.0	1.6	1.4	1.2	.8	.3	.1									179	179	134	101
54/ 53	.1	1.1	1.3	1.2	1.3	1.2	.7	.4										153	153	147	111
52/ 51	.1	.7	.6	1.5	1.2	.4	.6	.1										109	109	170	107
50/ 49	.1	.3	.7	1.2	1.0	.9	.5	.0										90	98	138	131
48/ 47	.2	.7	.8	.5	.8	.9	.2											85	85	146	94
46/ 45	.0	.6	.2	1.1	.5	.3	.3											61	61	138	86
44/ 43	.0	.0	.4	.5	.3	.3												32	32	129	87
42/ 41	.1		.2	.4	.2													21	21	84	94
40/ 39		.0	.1	.2	.1													11	11	79	82
38/ 37	.3	.0	.1	.1														12	12	54	93
36/ 35		.1		.0														3	3	31	80
34/ 33		.1		.0														3	3	16	84
32/ 31																				4	69
30/ 29																				2	58
28/ 27																					56
26/ 25																					42
24/ 23																					36
22/ 21																					21
20/ 19																					24

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAR MONTH

1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
18/ 17																					9
16/ 15																					8
14/ 13																					6
12/ 11																					2
10/ 9																					4
8/ 7																					1
TOTAL	3.1	16.1	19.4	18.4	13.8	10.2	7.6	5.4	3.7	1.7	.5	.1						2050	2050	2050	2050

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum.	9659337	134079	65.4	20.841	2050							
Dry Bulb	7359322	121592	59.3	8.479	2050			18.6	4.6	.9		93
Wet Bulb	5868487	106261	52.8	8.590	2050		.3	3.4	.0			93
Dew Point	4731386	95002	46.3	12.667	2050		15.2	.9				93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PAGE 1 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
80/ 79					.0		.0											2	2		
78/ 77						.0												1	1		
76/ 75			.0	.1	.0	.0	.0											6	6		
74/ 73					.1	.1	.1	.0										7	7		
72/ 71		.1	.1	.1	.2	.0	.1											15	15	3	
70/ 69		.4	1.2	.7	.3	.1	.2	.1										61	61	4	2
68/ 67	.0	1.1	1.9	.3	.3		.2											79	79	23	8
66/ 65	.4	3.2	1.8	.9	.2	.1	.2											138	138	77	35
64/ 63	.4	3.1	1.8	1.2	.3	.1	.1	.2										149	149	135	103
62/ 61	.4	3.6	1.6	1.2	.3	.4	.2	.1	.0									163	163	143	135
60/ 59	.7	4.3	2.1	1.1	.4	.1	.5	.2	.0									195	195	147	122
58/ 57	.6	1.9	2.1	.5	.3	.3	.6	.1										133	133	160	147
56/ 55	.6	2.6	2.0	1.1	.6	.2	.3											154	154	140	122
54/ 53	.5	3.1	2.5	1.1	.8	.8	.5											191	191	138	146
52/ 51	.2	2.3	1.7	1.3	.5	.7	.1											142	142	133	109
50/ 49	.2	1.2	2.0	1.2	.7	.5	.3											127	127	149	113
48/ 47	.1	1.6	1.4	1.6	.7	.5	.0											125	125	125	108
46/ 45	.1	1.4	1.4	1.0	.7	.5												104	104	131	104
44/ 43	.1	.7	1.0	1.1	.6	.2												90	90	127	102
42/ 41		.6	1.2	.9	.8	.0												72	72	114	82
40/ 39	.2	.2	.5	.6	.3	.0												39	39	93	79
38/ 37	.1	.2	.3	.4	.0													23	23	71	82
36/ 35		.4	.1	.1														14	14	69	79
34/ 33		.1	.1	.2														10	10	33	69
32/ 31	.0	.0	.0	.0														4	4	18	67
30/ 29		.0		.0														2	2	10	54
28/ 27																				1	57
26/ 25		.0																1	1	2	31
24/ 23																				1	31
22/ 21																					29
20/ 19																					15
18/ 17																					9
16/ 15																					3
14/ 13																					4

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAR (MONTH)

PAGE 2 2100-2300 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	4.9	32.2	27.9	17.0	8.5	5.2	3.8	.8	.1									2047	2047	2047	2047

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	12326594	154888	75.7	17.222	2047							
Dry Bulb	6391616	113030	55.2	8.574	2047		.3	7.8	.7			93
Wet Bulb	5534177	104771	51.2	9.161	2047		1.5	1.4				93
Dew Point	4823776	96276	47.0	12.021	2047		13.6	.5				93

USAFETAC FORM 0-26-5 (OL1) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

PAGE 1 0000-0200 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
76/ 75				.1														1	1		
74/ 73		.1	.3	.3	.1	.1												16	16		
72/ 71		.6	.0	.4	.1					.1								32	32	2	
70/ 69	.1	3.0	2.1	.9	.1	.1				.1								118	118	40	18
68/ 67	.4	4.2	4.3	.7	.5	.2	.2		.1									200	200	86	81
66/ 65	1.2	7.9	3.5	.6	.3	.3	.3	.1										267	267	195	115
64/ 63	1.2	5.9	3.5	1.1	.6	.3	.1											239	239	250	214
62/ 61	1.0	5.2	1.9	.7	.4	.3	.2	.1										182	182	223	215
60/ 59	.8	3.9	2.4	1.1	.8	.3	.3		.1									182	182	181	190
58/ 57	.5	2.8	1.8	1.0	.6	.4	.3	.1										139	139	142	164
56/ 55	.3	3.0	.7	1.2	.6	.3	.2											116	116	148	114
54/ 53		1.3	.8	.7	.5	.2	.1											70	70	111	112
52/ 51	.1	1.2	1.2	.5	.8	.3	.1											79	79	73	96
50/ 49	.4	1.6	1.1	.7	.3	.2												83	83	95	74
48/ 47		1.3	.8	.7	.1	.1												57	57	93	64
46/ 45	.2	1.2	1.1	.3	.2	.1												54	54	88	82
44/ 43	.1	.4	.6	.3	.1													28	28	60	88
42/ 41	.2	.3	.2	.2														16	16	49	54
40/ 39		.1	.1	.1														6	6	28	42
38/ 37		.2																4	4	16	46
36/ 35																				8	38
34/ 33																				1	35
32/ 31																					13
30/ 29																					11
28/ 27																					7
26/ 25																					10
24/ 23																					3
22/ 21																					1
20/ 19																					2
TOTAL	6.2	44.2	26.9	11.6	6.0	3.0	1.6	.2	.1	.1								1889		1889	
																		1889		1889	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13150478	155386	82.3	13.974	1889							
Dry Bulb	6947607	113743	60.2	7.233	1889			17.5	.8			90
Wet Bulb	6261828	107736	57.0	7.882	1889			6.1				90
Dew Point	5777058	102800	54.4	9.836	1889		2.2	4.7				90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68,70 YEARS | APR MONTH

 0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
74/ 73			.2															3	3		
72/ 71		.8	.1	.1	.1													21	21	3	2
70/ 69	.2	2.3	.6	.5					.1									68	68	33	14
68/ 67	.8	3.8	1.7	.4					.1	.1								128	128	61	68
66/ 65	1.6	5.4	2.5	.1	.2	.1		.1	.1									192	192	141	76
64/ 63	1.4	7.0	3.2	.8	.1					.1								238	238	189	174
62/ 61	1.4	6.4	2.1	.6	.4	.1	.1											209	209	220	188
60/ 59	1.4	5.6	1.5	.8	.5	.4	.1											193	193	199	222
58/ 57	1.1	4.2	1.5	.6	.4	.3	.2	.1										150	158	173	160
56/ 55	.6	3.7	1.3	.7	.5	.3	.1											134	134	129	128
54/ 53	.3	2.0	1.4	1.1	.3	.1	.1											101	101	119	134
52/ 51	.2	1.8	1.4	1.0	.3	.3												92	92	91	84
50/ 49	.3	1.3	.8	1.1	.4	.2												77	77	99	77
48/ 47	.4	2.2	.6	.8	.4													88	88	92	78
46/ 45	.1	2.0	.9	.7	.3	.1												76	76	101	70
44/ 43	.1	.6	.8	.5	.1													38	38	60	87
42/ 41	.2	1.1	.6	.1														37	37	72	59
40/ 39	.2	.6	.3	.4														27	27	52	69
38/ 37		.2		.1														6	6	33	51
36/ 35		.2	.1															4	4	15	41
34/ 33																				5	41
32/ 31																				3	25
30/ 29																					12
28/ 27																					15
26/ 25																					9
24/ 23																					5
22/ 21																					1
TOTAL	10.3	51.1	21.8	10.3	3.9	1.8	.5	.1	.2	.1									1890		1890
																		1890		1890	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum	13885032	160084	84.7	13.134	1890							
Dry Bulb	6498084	109862	58.1	7.701	1890			10.5	.1			90
Wet Bulb	5937760	104936	55.5	8.345	1890		.1	4.6				90
Dew Point	5551861	100651	53.3	10.075	1890		3.2	4.0				90

FORM JUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
78/ 77								.1										1	1		
76/ 75			.2	.2	.1	.1	.1											12	12		
74/ 73		.2	.7	.7	.2	.1	.1											35	35	1	
72/ 71		.8	1.5	1.1	.2	.1												70	70	8	4
70/ 69	.2	2.5	2.0	1.3	.2	.1												120	120	54	23
68/ 67	.6	3.7	2.6	1.2	.5	.3	.1	.1										173	173	113	79
66/ 65	1.1	5.3	2.9	1.0	.5	.1	.1											212	212	183	135
64/ 63	1.0	5.6	2.8	.8	.5	.3	.2	.1										216	216	204	181
62/ 61	.6	5.1	1.9	.8	.6	.2	.3		.2									186	186	209	205
60/ 59	.8	4.3	1.3	.7	.6	.4	.1											160	161	182	192
58/ 57	.8	2.9	1.6	.7	.7	.5	.1											139	139	153	160
56/ 55	.7	3.0	1.1	.9	1.2	.4	.3	.1										150	150	129	125
54/ 53	.3	2.4	1.2	1.0	.6	.3	.1											116	116	120	118
52/ 51		.9	.7	.7	.5	.2												57	57	97	97
50/ 49	.1	1.1	.9	.7	.7	.1												69	69	78	78
48/ 47	.3	.9	1.3	.5	.5	.1												70	70	99	58
46/ 45	.1	1.4	.6	.7	.2													57	57	89	77
44/ 43	.1	.6	.7	.3	.2													36	36	72	55
42/ 41	.1	.7	.5	.3														29	29	56	69
40/ 39	.1	.6	.4	.1														22	22	47	76
38/ 37		.2		.1														5	5	25	60
36/ 35			.1															2	2	15	40
34/ 33		.1																1	1	2	37
32/ 31																				3	28
30/ 29																					18
28/ 27																					11
26/ 25																					7
24/ 23																					5
22/ 21																					1
TOTAL	6.6	42.2	24.9	13.7	7.9	3.0	1.2	.2	.2										1939		1939
																		1938		1939	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13299039	138229	81.6	14.131	1939							
Dry Bulb	7062737	115983	59.8	8.035	1939			19.1	2.2			90
Wet Bulb	6332278	109582	56.5	8.478	1939		.1	8.2	.0			90
Dew Point	5822456	104348	53.8	10.333	1939		3.2	4.9				90

FORM AUS 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13024 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-68,70 YEARS | APR MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
88/ 87								.1	.1									2	2		
86/ 85								.2		.1								4	4		
84/ 83						.3	.3	.2	.2	.1	.1	.1						21	21		
82/ 81					.1	.4	.6	.3	.2	.2								34	34		
80/ 79			.1	.2	.6	1.7	1.1	.7	.4	.2	.1							96	96		
78/ 77			.2	.7	2.2	2.4	1.6	.8	.5	.3	.1							171	171		
76/ 75			.3	1.7	2.5	1.9	1.9	.8	.6	.4	.2							199	199	2	
74/ 73		.2	1.4	1.9	2.5	1.7	1.5	.8	.7	.2	.2	.2						218	218	19	1
72/ 71		.4	1.6	1.8	1.6	1.5	1.3	.7	.5	.6	.2	.1						196	196	59	7
70/ 69	.1	.8	1.0	2.1	1.4	.9	1.5	.9	.4	.4	.1							183	183	193	42
68/ 67	.1	1.0	1.6	1.0	1.3	1.0	1.3	1.1	.6	.4	.2							185	185	209	121
66/ 65	.3	1.1	1.3	1.1	.7	1.1	.9	1.1	.4	.3								159	159	226	159
64/ 63	.3	1.2	.7	.5	1.2	.8	.7	1.4	.6	.1								146	146	226	185
62/ 61	.1	.6	.4	.4	.6	.5	.8	1.1	.3									92	92	170	180
60/ 59	.1	.7	.4	.4	.3	.5	.7	.6	.1	.1								72	72	143	177
58/ 57	.1	.7	.3	.3	.4	.3	.9	.1	.1									58	58	140	123
56/ 55		.1	.2	.3	.2	.9	.3	.2										46	46	121	122
54/ 53		.2	.3	.1	.4	.6	.4											37	37	88	100
52/ 51		.1	.1	.1	.2	.4	.3											20	20	86	86
50/ 49		.1	.2	.1	.2	.2	.1											13	13	95	83
48/ 47		.1	.1		.1	.2												8	8	66	87
46/ 45		.1																1	1	62	61
44/ 43					.1													1	1	30	56
42/ 41																				15	48
40/ 39																				9	37
38/ 37																				3	59
36/ 35																				1	46
34/ 33																					52
32/ 31																					39
30/ 29																					37
28/ 27																					18
26/ 25																					10
24/ 23																					14
22/ 21																					7

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

PAGE 2 0900-1100 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
20/ 19																					4
18/ 17																					1
14/ 13																					1
TOTAL	.9	7.1	9.8	12.3	16.3	17.1	16.2	10.8	5.4	3.1	.9	.3							1962		1963
																		1962		1963	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7699655	117695	60.0	18.104	1963							
Dry Bulb	9513703	135853	69.2	7.385	1962			60.0	34.2	4.5		90
Wet Bulb	7263048	118438	60.3	7.724	1963			22.1	1.0			90
Dew Point	5905232	105220	53.6	11.628	1963		6.0	7.8	.0			90

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-68,70 YEARS | APR MONTH

 1200-1400 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 91											.2	.1						5	5		
90/ 89									.2	.4	.1							12	12		
88/ 87							.1	.4	.3	.3	.2	.2	.2	.1				33	33		
86/ 85						.1	.2	.5	.7	.6	.3	.2	.4	.1				38	58		
84/ 83					.1	.2	.9	1.2	.9	.2	.4	.2	.3	.1	.1			88	88		
82/ 81					.4	1.3	2.1	1.9	1.0	.8	.8	.6	.2					179	179		
80/ 79				.3	1.0	2.7	3.0	1.3	1.6	1.2	.7	.4	.1					241	241		
78/ 77			.1	.3	1.8	1.7	1.6	1.3	.9	.7	.8	.4	.1					192	192		
76/ 75		.1	.1	.8	1.4	1.4	1.6	1.4	.8	.8	.4	.3	.1					176	176	3	
74/ 73		.3	.2	.9	1.0	1.1	1.2	1.3	.9	1.0	.7	.2						170	170	47	1
72/ 71		.1	.0	.6	1.0	.8	1.2	1.3	1.0	.8	1.1	.1						165	165	125	13
70/ 69		.3	.3	.8	.7	.8	1.0	1.0	.8	.7	.6	.1						138	138	217	30
68/ 67	.2	.6	1.1	.4	.4	.5	1.0	1.2	1.2	1.0	.3							153	153	216	97
66/ 65	.4	.7	.4	.3	.4	.6	.7	1.1	1.0	.4	.1							117	117	183	172
64/ 63	.3	.7	.6	.6	.1	.1	.4	.6	1.0									81	81	214	184
62/ 61	.2	.4	.3	.1	.4	.3	.3	.6	.2	.1								52	52	166	174
60/ 59	.2	.4	.4	.2	.1	.1	.3	.5	.4									47	47	161	144
58/ 57		.3	.1	.1	.2	.2	.3	.5	.2									33	33	136	108
56/ 55		.1			.1		.1	.3										8	8	132	112
54/ 53			.1	.1	.1	.1	.2											8	8	100	114
52/ 51			.1	.1														3	3	82	82
50/ 49		.1	.1															4	4	81	80
48/ 47		.1																1	1	50	88
46/ 45																				28	73
44/ 43																				14	71
42/ 41																				7	77
40/ 39																					52
38/ 37																					57
36/ 35																					39
34/ 33																					46
32/ 31																					39
30/ 29																					39
28/ 27																					26
26/ 25																					20

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-68,70 (YEARS) APR (MONTH)

1200-1400 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
24/ 23																					8
22/ 21																					11
20/ 19																					4
18/ 17																					2
12/ 11																					1
TOTAL	1.2	3.9	4.3	5.3	8.7	11.9	15.9	16.3	13.0	8.9	6.5	2.7	1.2	.2	.1				1964		1964
																		1964		1964	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5772088	99990	50.9	18.621	1964							
Dry Bulb	10794298	144848	73.8	7.538	1964			73.8	52.9	23.6		90
Wet Bulb	7570074	121096	61.7	7.263	1964			28.0	2.4			90
Dew Point	5747505	103651	52.8	11.885	1964		6.9	6.5	.0			90

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-68,70 YEARS | APR MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
94/ 93											.1							1	1		
92/ 91										.1	.2		.1					7	7		
90/ 89										.3	.1	.1	.1	.1				12	12		
88/ 87								.2	.3	.4	.3	.1	.4	.2				35	35		
86/ 85							.2	.4	.6	.5	.5	.3	.4					54	54		
84/ 83					.1	.2	.2	.9	.5	.3	.4	.5	.3					69	69		
82/ 81					.2	.9	1.0	1.3	.2	.9	.4	.3	.2					104	104		
80/ 79		.1		.1	1.0	2.4	1.9	1.1	1.0	.2	.5	.3	.2					166	166		
78/ 77				.3	1.6	3.0	1.5	.9	.8	.5	1.1	.3	.2					198	198	1	
76/ 75			.1	1.2	2.1	2.1	2.0	1.0	.7	.7	.5	.2	.1					205	205	3	1
74/ 73	.1	.1	.7	1.4	2.3	1.3	2.0	1.0	.7	.5	.4	.2						205	205	23	1
72/ 71		.5	.6	1.5	.8	1.2	.9	1.1	1.0	1.2	1.0	.3						196	196	86	6
70/ 69	.1	.4	.8	1.2	1.0	1.2	.9	1.2	1.2	1.2	.5	.3						197	197	230	35
68/ 67		.8	.9	.6	.5	.6	1.1	1.3	1.2	.8	.3							159	159	228	92
66/ 65	.3	.5	.6	.7	.4	.5	.6	.7	.8	.4								103	103	228	150
64/ 63	.4	.6	.7	.7	.2	.4	.5	.5	.5	.1								86	86	213	206
62/ 61	.2	.3	.1	.2	.3	.6	.5	.3	.5	.1								62	62	156	191
60/ 59		.3	.2	.2	.3	.3	.3	.2	.3									37	37	167	131
58/ 57		.1	.3	.1		.1	.2	.3	.1									20	20	134	125
56/ 55	.1	.1		.1	.2			.1										10	10	104	132
54/ 53				.1	.1	.1	.2											6	6	128	109
52/ 51		.1			.1													2	2	93	68
50/ 49		.2	.1															5	5	69	74
48/ 47																				43	75
46/ 45																				18	81
44/ 43																				9	68
42/ 41																				6	73
40/ 39																					66
38/ 37																					44
36/ 35																					46
34/ 33																					38
32/ 31																					29
30/ 29																					26
28/ 27																					26

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-68,70 YEARS | APR MONTH

1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
26/ 25																					17
24/ 23																					10
22/ 21																					7
20/ 19																					5
18/ 17																					6
14/ 13																					1
TOTAL	1.1	3.8	5.1	8.3	10.9	14.9	13.9	12.4	10.4	8.2	6.2	2.8	1.8	.3				1939	1939	1939	1939

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Ref Hum.	6096935	102199	52.7	19.145	1939							
Dry Bulb	10482976	141898	73.2	7.138	1939			74.1	49.0	16.9	.0	90
Wet Bulb	7462248	119546	61.7	6.883	1939			26.5	1.3			90
Dew Point	5736383	103017	53.1	11.654	1939		5.9	6.3	.1			90

FORM JUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORG,A/HUNTER AAF STATION NAME | 48-66,68,70 YEARS | APR MONTH

 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
90/ 89										.1								1	1		
88/ 87											.1							2	2		
86/ 85								.2	.1	.1			.1					7	7		
84/ 83						.1	.1	.1	.1	.1	.1	.1						10	10		
82/ 81						.1	.1	.2	.1	.1	.3	.1	.1					16	16		
80/ 79				.1	.2	.5	.5	.2	.2	.1	.2	.1						36	36		
78/ 77				.1	.5	.4	.4	.6	.2	.2	.2	.1						51	51		
76/ 75			.3	1.3	1.6	1.0	.3	.3	.4	.3	.2							105	105		
74/ 73		.1	.9	2.2	1.7	.8	.7	.4	.4	.4	.2							145	145	5	
72/ 71		.7	2.5	3.0	1.5	.9	.5	.6	.4	.3	.2							199	199	29	4
70/ 69	.1	1.7	4.2	3.3	2.0	.9	.5	.4	.5	.3	.2	.1						265	265	111	25
68/ 67	.4	1.8	3.2	2.2	1.8	1.1	.6	.8	.5	.2	.1							241	241	201	95
66/ 65	.4	1.9	2.6	2.2	1.1	.7	1.0	.7	.6	.4	.1							220	220	253	188
64/ 63	.3	1.9	1.5	1.5	1.4	.7	.7	.6	.5	.2								177	177	210	184
62/ 61	.3	.8	1.0	1.2	1.0	1.1	.5	.7	.2	.1								130	130	208	214
60/ 59	.2	.4	1.1	1.0	1.0	.8	.5	.5	.2									104	104	165	151
58/ 57	.1	.5	.6	.7	1.0	.5	.4	.2	.1									76	76	131	137
56/ 55	.1	.2	.3	.7	.5	.2	.3	.1	.1									47	47	128	131
54/ 53	.1	.1	.2	.5	.3	.2	.1	.1										28	28	119	81
52/ 51			.1	.3	.2	.1	.1											14	14	94	84
50/ 49		.1	.2	.2	.1	.1												11	11	95	83
48/ 47		.2			.1													5	5	62	70
46/ 45																				46	66
44/ 43																				16	74
42/ 41																				9	65
40/ 39																				4	58
38/ 37																					29
36/ 35																					33
34/ 33																					29
32/ 31																					23
30/ 29																					15
28/ 27																					18
26/ 25																					11
24/ 23																					9

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68,70 (YEARS) APR (MONTH)

PAGE 2 1800-2000 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
22/ 21																					5
20/ 19																					5
18/ 17																					2
16/ 15																					1
TOTAL	1.9	10.3	18.5	20.5	15.9	10.1	7.4	6.5	4.3	2.5	1.7	.3	.1					1890	1890	1890	1890

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	8913211	124703	66.0	19.040	1890							
Dry Bulb	8633152	127148	67.3	6.483	1890			51.3	17.8	2.8		90
Wet Bulb	6884398	113316	60.0	6.921	1890			16.5	.2			90
Dew Point	5798557	102663	54.3	10.841	1890		4.2	5.9				90

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 46-66,68,70 (YEARS) APR (MONTH)

 2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
80/ 79				.1		.1												2	2		
78/ 77				.1	.3	.1		.1										8	8		
76/ 75			.1	.3	.1	.1	.1			.1								13	13		
74/ 73		.1	.7	.4	.3	.1	.1	.1		.1								34	34	1	
72/ 71		1.0	2.2	.9	.2	.1	.2	.1	.1									87	87	11	1
70/ 69	.2	3.5	4.4	1.6	.6	.4	.5	.1	.2									216	216	67	23
68/ 67	.4	5.1	5.3	1.7	.4	.4	.2	.3	.1									264	264	146	102
66/ 65	.4	5.8	4.1	1.6	.7	.3	.3	.1										250	250	249	175
64/ 63	.5	4.5	4.0	1.7	.7	.2	.4	.3	.1									235	235	229	223
62/ 61	.6	3.0	2.4	1.4	.6	.6	.3	.4	.1									176	176	215	200
60/ 59	.3	1.6	2.9	.9	1.4	.4	.4	.3	.1									154	154	184	185
58/ 57	.1	1.9	1.7	.7	.5	.4	.2	.4										111	111	138	145
56/ 55		1.5	1.3	1.0	.7	.5	.4	.2										103	103	132	112
54/ 53		.4	.7	1.0	.5	.3	.1	.1										57	57	105	129
52/ 51	.1	.6	1.6	.6	.5	.2	.1											69	69	80	90
50/ 49		.7	1.2	.4	.3	.2	.1											53	53	89	59
48/ 47		.6	.5	.5	.2	.1												35	35	93	61
46/ 45		.2	.1	.2	.1													9	9	64	82
44/ 43	.1	.1	.1	.1	.1													8	8	50	74
42/ 41			.2	.1														4	4	20	46
40/ 39		.1																1	1	12	34
38/ 37			.1															1	1	8	35
36/ 35																				1	32
34/ 33																					28
32/ 31																					14
30/ 29																					9
28/ 27																					11
26/ 25																					12
24/ 23																					3
22/ 21																					3
20/ 19																					1
18/ 17																					1
TOTAL	2.6	30.7	33.5	15.1	8.0	4.3	3.0	2.2	.5	.1								1890	1890	1890	1890

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11946929	147427	78.0	15.384	1890							
Dry Bulb	7522321	118585	62.7	6.584	1890			29.7	2.7			90
Wet Bulb	6586619	110693	58.6	7.405	1890			10.7	.0			90
Dew Point	5960134	104464	55.3	9.928	1890		2.6	6.0				90

FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-70 (YEARS) MAY (MONTH)

PAGE 1 0000-0200 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83							.0	.0										2	2		
82/ 81					.0	.0												2	2		
80/ 79				.3		.0	.0											9	9		
78/ 77		.1	.2	.3	.2	.0	.0											22	22		
76/ 75		1.3	2.0	1.3	.5	.1	.1											108	108	5	1
74/ 73	.1	3.5	4.2	1.6	.4	.0	.0											202	202	60	25
72/ 71	.6	6.2	5.1	1.9	.5	.1												296	296	171	121
70/ 69	1.3	7.7	5.8	1.0	.4	.1												335	335	308	207
68/ 67	1.3	8.5	4.1	1.1	.5	.3												323	323	356	330
66/ 65	.9	6.2	2.8	1.2	.5	.1		.0										242	242	330	337
64/ 63	.4	3.2	1.8	1.1	.3	.3	.0											145	145	215	268
62/ 61	.3	3.0	1.3	1.0	.2	.1	.1											123	123	149	176
60/ 59	.2	2.2	1.4	.7	.2	.0	.2											101	101	138	133
58/ 57		1.4	.7	.8		.1												60	60	97	109
56/ 55		.6	.3	.2	.1													27	27	88	94
54/ 53	.0	.5	.4	.1														21	21	44	82
52/ 51		.2	.3	.0														12	12	36	52
50/ 49	.0	.4	.0															10	10	28	29
48/ 47	.0																	1	1	16	36
46/ 45			.1															2	2	1	19
44/ 43		.0																1	1	1	8
42/ 41																				2	5
40/ 39																					6
38/ 37																					6
36/ 35																					1
TOTAL	5.4	45.0	30.5	12.7	4.0	1.7	.6	.1											2044		2045
																		2044		2045	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature					
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15231874	175314	85.7	9.954	2045							
Dry Bulb	9377333	137997	67.5	5.451	2044			59.1	15.7	.4		93
Wet Bulb	8599958	132112	64.6	5.648	2045			40.9	3.0			93
Dew Point	8183860	128678	62.9	6.525	2045			31.1	1.2			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAY MONTH

 0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
80/ 79				.0	.0													2	2		
78/ 77			.1	.2	.0													8	8		
76/ 75		.5	.5	.1		.0												26	26		
74/ 73	.4	2.9	2.9	.6	.1													143	143	38	16
72/ 71	.4	4.6	3.9	1.1	.2													213	213	107	81
70/ 69	1.8	9.4	3.8	1.2	.0	.1												338	338	228	172
68/ 67	2.0	8.4	4.3	.7	.4	.1												329	329	352	301
66/ 65	1.8	7.4	2.4	.6	.4	.0												262	262	315	307
64/ 63	1.2	5.3	1.6	.9	.3	.0												192	192	257	260
62/ 61	.6	3.8	1.3	.5	.3	.0												137	137	170	230
60/ 59	.9	3.2	1.7	.6	.1													134	134	140	149
58/ 57	.5	2.7	1.6	.3	.2	.1	.0											113	113	144	122
56/ 55	.2	1.7	.7	.5	.1													70	70	106	100
54/ 53		.8	1.0	.2	.1													44	44	81	109
52/ 51	.0	.2	.4	.0	.0													17	17	38	73
50/ 49	.1	.3	.1	.0														12	12	38	32
48/ 47	.1	.4	.2															15	15	27	31
46/ 45	.1	.2	.0															8	8	15	42
44/ 43																				6	14
42/ 41																				1	10
40/ 39			.0															1	1		6
38/ 37			.0															1	1		6
36/ 35																				1	2
34/ 33																				1	
30/ 29																					2
TOTAL	10.2	51.9	26.8	7.8	2.6	.5	.0												2065		2065
																		2065		2065	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	16194333	181967	88.1	8.790	2065							
Dry Bulb	8933284	135276	65.5	5.885	2065			47.7	8.1	.0		93
Wet Bulb	8324367	130499	63.2	6.124	2065			32.7	1.7			93
Dew Point	7984540	127620	61.8	6.871	2065		.1	25.7	.7			93

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

0600-0800 (HOURS (L., S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
86/ 85						.0	.0	.0										3	3		
84/ 83					.0	.0												2	2		
82/ 81				.2	.1	.1	.0	.0										11	11		
80/ 79			.1	.6	.4	.4	.1											35	35		
78/ 77		.1	1.1	2.1	.8	.4	.0		.0									96	96	1	
76/ 75	.0	.8	2.9	1.9	1.3	.1	.1	.0	.1									155	155	17	4
74/ 73	.1	3.2	4.8	2.1	.9	.5	.2	.0										253	253	84	27
72/ 71	.1	4.4	4.0	1.8	.7	.3	.1											242	242	217	132
70/ 69	1.6	6.7	3.9	1.8	.8	.4	.0											326	326	324	263
68/ 67	.7	5.9	3.5	1.3	1.0	.1	.1											269	269	329	306
66/ 65	1.4	3.7	2.3	.8	.4	.3	.0											189	189	292	298
64/ 63	.5	3.0	1.6	1.4	.7	.2	.2											158	158	196	238
62/ 61	.3	2.2	1.4	.9	.5	.0												114	114	181	185
60/ 59	.2	1.6	1.2	.5	.3	.0	.1											85	85	114	134
58/ 57	.1	1.7	.9	.6	.0	.1												75	75	96	117
56/ 55	.2	.9	.7	.2	.2													47	47	113	110
54/ 53		.6	.6	.3			.0											33	33	58	90
52/ 51		.2	.3	.0	.1													15	15	41	69
50/ 49		.3	.2	.1														13	13	27	45
48/ 47		.0																1	1	24	43
46/ 45	.0	.1	.0															5	5	6	28
44/ 43																				5	16
42/ 41																				2	10
40/ 39																					4
38/ 37																					6
36/ 35																					1
28/ 27																					1
TOTAL	5.3	35.6	29.4	16.5	8.3	3.2	1.3	.2	.1										2127		2127
																		2127		2127	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	> 67 F	< 73 F	> 80 F	< 93 F	Total
Rel. Hum.	14938850	176642	83.0	11.252	2127							
Dry Bulb	9944825	144815	68.1	6.331	2127			60.9	24.3	1.1		93
Wet Bulb	8945300	137310	64.6	6.178	2127			42.5	4.5			93
Dew Point	8415928	132950	62.5	7.053	2127		.0	32.0	1.4			93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAY MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
96/ 95													.0					1	1		
94/ 93									.1	.1	.0							5	5		
92/ 91									.1	.2	.2							10	10		
90/ 89							.1	.1	.4	.1	.0		.0					19	19		
88/ 87							.5	.4	.7	.3	.1	.1						45	45		
86/ 85					.0	.8	1.2	1.4	.8	.2	.3	.1	.0					103	103		
84/ 83					.9	2.3	2.0	1.8	.7	.7	.2	.2						186	186		
82/ 81			.0	.3	2.6	3.2	2.3	1.3	.8	.5	.2							241	241		
80/ 79			.1	1.9	4.6	4.5	2.6	1.4	.8	.3	.2							349	349		
78/ 77			.0	2.4	3.6	2.2	1.5	1.4	.8	.4								274	274	10	
76/ 75		.3	2.1	2.1	2.4	2.0	1.0	1.1	.8	.2								256	256	93	1
74/ 73	.1	.7	1.0	1.9	1.7	1.6	1.0	.9	.3	.1								210	210	263	31
72/ 71	.2	.9	.9	1.0	.6	.7	.6	.8	.3	.2								131	131	379	149
70/ 69	.2	.7	.7	.9	.4	.5	.5	.6	.2	.0								100	100	383	281
68/ 67	.0	.5	.7	.4	.3	.6	.5	.4	.1	.1								79	79	263	298
66/ 65	.0	.0	.5	.4	.1	.3	.2	.1	.0									38	38	202	279
64/ 63		.2	.4	.2	.1	.1	.2											25	25	164	224
62/ 61		.2	.1	.1	.1	.1	.1	.0										16	16	118	166
60/ 59		.2	.1	.1	.0	.0												15	15	79	128
58/ 57		.2	.1	.1		.0												11	11	66	134
56/ 55	.0	.1	.0	.0	.1													9	9	49	95
54/ 53																				29	82
52/ 51		.1																3	3	11	62
50/ 49																				13	59
48/ 47																				4	45
46/ 45																					31
44/ 43																					23
42/ 41																					16
40/ 39																					11
38/ 37																					2
36/ 35																					3
34/ 33																					2
32/ 31																					2
30/ 29																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≥ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC 0-26-7 (OL1) ORM JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	> 31	D.B. W.B	Dry Bulb	Wet Bulb	Dew Point
24/ 23 TOTAL	.7	4.2	8.0	11.8	17.6	19.1	14.4	11.7	7.0	3.5	1.4	.4	.1						2126		1 2126
																		2126		2126	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	8695310	132288	62.2	14.774	2126							
Dry Bulb	12699223	163783	77.0	6.200	2126			87.9	74.3	34.2	.3	93
Wet Bulb	9775278	143690	67.6	5.475	2126			60.8	16.0			93
Dew Point	8362829	132515	62.3	7.611	2126		.2	33.2	1.4			93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
NAVY WEATHER SERVICE/NAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAY MONTH

PAGE 1 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
100/ 99														.0				1	1		
98/ 97											.0		.0	.0				3	3		
96/ 95										.2	.1	.3	.2					17	17		
94/ 93									.1	.1	.3	.6	.2	.1	.0			32	32		
92/ 91							.0	.0	.0	.5	.9	.6	.2	.1				69	69		
90/ 89							.3	.0	1.8	1.3	.9	.8	.5					136	136		
88/ 87						.2	1.3	1.5	1.5	1.2	.6	.6	.2	.0				151	151		
86/ 85					.0	1.6	2.7	2.4	2.8	1.5	1.2	.5	.2					275	275		
84/ 83			.0		.7	2.3	2.8	2.4	1.8	1.0	.8	.5	.1					264	264		
82/ 81				.2	1.7	3.0	2.9	1.8	.9	1.1	.8	.4						271	271		
80/ 79			.2	.8	1.3	2.0	2.8	1.4	.6	.9	1.0	.1						239	239	3	
78/ 77		.0	.0	1.0	1.3	1.2	.8	1.2	1.1	.8	.4	.0						180	180	33	2
76/ 75		.3	.8	1.1	.9	.4	1.0	.7	.6	.8	.1							144	144	144	4
74/ 73	.1	.6	.7	.5	.5	.7	.8	.4	.5	.6	.1							124	124	314	34
72/ 71	.2	.7	.7	.6	.1	.2	.1	.4	.3	.1	.0							74	74	377	147
70/ 69	.2	.8	.2	.1	.3	.1	.1	.2	.1	.0								50	50	359	238
68/ 67	.1	.5	.1	.2	.1	.3	.1	.1	.2	.0								39	39	252	255
66/ 65	.1	.1	.2	.1		.0	.0	.1	.0									17	17	180	240
64/ 63	.0	.2	.0	.2			.1											13	13	134	25[illegible]
62/ 61	.1	.1	.1	.0														9	9	135	17[illegible]
60/ 59		.1	.0															4	4	71	154
58/ 57		.1																3	3	69	133
56/ 55		.2		.0														[illegible]	5	29	96
54/ 53		.0	.0	.1	.0													4	5	11	89
52/ 51			.0															1	1	9	72
50/ 49																				4	59
48/ 47																				3	56
46/ 45																					54
44/ 43																					36
42/ 41																					21
40/ 39																					14
38/ 37																					6
36/ 35																					6
34/ 33																					1

Element (X)	Σ_x	Σ_{x^2}	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-[illegible] (OL1) REVISED 4 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERV'CE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PAGE 2 1200-1400 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
32/ 31 TOTAL	.9	4.1	3.9	5.0	7.1	12.0	16.0	13.2	13.1	10.2	7.5	4.6	1.8	.4	.0			2126	2126	2127	1 2127

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Re. Hum.	6784100	114690	53.9	16.798	2127							
Dry Bulb	14048143	172215	81.0	6.791	2126			90.3	83.4	59.7	2.3	93
Wet Bulb	10014824	145514	68.4	5.304	2127			64.8	21.6			93
Dew Point	8169491	130701	61.4	8.060	2127		.0	29.7	1.7			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEURGIA/HUNTER AAF STATION NAME | 48-70 YEARS | MAY MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
100/ 99												.0	.0	.1	.0			6	6		
98/ 97											.0			.0				2	2		
96/ 95										.1	.1	.3	.2	.1	.1			20	20		
94/ 93								.0		.2	.3	1.0	.2	.0	.1			42	42		
92/ 91								.2	.3	.8	.7	.6	.3	.3	.0			65	65		
90/ 89							.1	.6	.7	.7	.6	.4	.2					69	69		
88/ 87						.1	.5	.9	1.7	.8	.6	.5	.4					118	118		
86/ 85					.1	.8	1.3	1.3	1.3	.6	.8	.7	.2					151	151		
84/ 83				.1	.6	2.1	2.4	1.7	1.5	.5	.5	.5	.1	.1				213	213		
82/ 81			.0	.5	2.7	2.7	2.6	2.2	.8	.6	.6	.2	.1					277	277		
80/ 79			.1	1.3	2.7	3.2	2.6	1.7	.9	.6	.8	.5						306	306	3	
78/ 77		.0	.5	1.5	2.1	2.8	1.8	1.4	.8	.6	.6	.1						258	258	25	
76/ 75		.2	1.6	1.5	1.0	.9	1.3	.8	.7	.8	.3	.0						190	190	116	7
74/ 73	.0	.9	1.2	1.1	.9	1.1	.8	.7	.3	.1								153	153	266	35
72/ 71	.2	.9	.8	.4	.4	.7	.4	.1	.1									84	84	394	144
70/ 69	.3	.9	.4	.2	.2	.2	.1	.1	.2	.2								64	64	361	234
68/ 67	.3	.7	.6	.4	.0		.1	.1	.1									46	46	303	282
66/ 65	.2	.2	.3	.1	.1	.0		.0										21	21	205	261
64/ 63	.1	.1	.2	.3	.0													16	16	145	217
62/ 61			.1															2	2	126	172
60/ 59																				82	174
58/ 57		.1	.1	.0	.0													8	8	50	152
56/ 55				.1	.1													4	4	18	73
54/ 53																				11	74
52/ 51	.1	.0																3	3	7	77
50/ 49																				6	51
48/ 47																					45
46/ 45																					41
44/ 43																					25
42/ 41																					26
40/ 39																					15
38/ 37																					6
36/ 35																					5
34/ 33																					2

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (YEARS) MAY (MONTH)

PAGE 2 1500-1700 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	1.2	4.2	9.8	7.6	11.1	14.7	14.0	11.9	9.5	6.6	5.9	4.8	1.8	.7	.3			2118	2118	2118	2118

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	7492433	120375	56.8	17.530	2118							
Dry Bulb	13611601	169201	79.9	6.685	2118			90.6	62.1	42.4	3.1	93
Wet Bulb	9924025	144599	68.3	4.958	2118			64.5	18.0	.0		93
Dew Point	8227658	130970	61.8	7.803	2118			30.8	1.8			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68-70 YEARS | MAY MONTH

 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
96/ 95												.0	.0					2	2		
94/ 93									.0				.0					2	2		
92/ 91										.0	.1		.0					4	4		
90/ 89							.0	.0	.2	.1	.3	.2	.0					19	19		
88/ 87							.1	.1	.2	.3								16	16		
86/ 85					.0	.5	.2	.5	.2	.1	.2		.0					41	41		
84/ 83				.0	.2	.4	.6	.6	.2	.2	.0	.1	.0					53	53		
82/ 81				.3	.6	1.3	.9	.3	.2	.1	.2							81	81		
80/ 79			.6	1.5	2.7	1.5	1.3	.8	.5	.4	.1	.0						190	190		
78/ 77	.0	.2	2.1	2.6	3.3	1.6	1.4	.2	.1	.1	.1							247	247	11	1
76/ 75		.7	3.2	4.3	3.5	1.8	.8	.7	.4	.4	.0							324	324	52	2
74/ 73	.1	1.5	4.4	3.8	2.6	1.8	.5	.6	.3	.2								323	323	146	53
72/ 71	.2	2.4	3.2	2.8	1.8	.9	1.1	.5	.1									266	266	311	141
70/ 69	.3	2.6	2.0	2.3	1.0	1.0	.8	.1	.0									208	208	412	237
68/ 67	.4	1.7	1.6	1.1	1.0	.5	.3	.1	.0									139	139	323	344
66/ 65	.1	.7	.6	.8	.6	.3	.1											67	67	281	255
64/ 63	.1	.4	.3	.5	.2		.1		.0									36	36	159	257
62/ 61			.1	.2		.0	.0											10	10	127	171
60/ 59				.1				.0										3	3	111	159
58/ 57				.0	.1													3	3	65	105
56/ 55			.2	.1	.1													8	8	21	64
54/ 53																				9	75
52/ 51	.0	.0																2	2	6	59
50/ 49		.0																1	1	8	42
48/ 47																				3	21
46/ 45																					26
44/ 43																					12
42/ 41																					11
40/ 39																					6
38/ 37																					1
36/ 35																					1
32/ 31																					2
TOTAL	1.4	10.2	18.3	20.0	17.9	11.7	8.4	4.7	2.7	2.2	1.1	.4	.3					2045	2045		2045
																		2045		2045	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	> 80 F	< 93 F	Total
Rel. Hum.	10327630	143262	70.0	15.579	2046							
Dry Bulb	11355916	151976	74.3	5.493	2045			87.1	59.2	14.1	.2	93
Wet Bulb	9271090	137340	67.2	4.820	2045			57.1	9.5			93
Dew Point	8253146	129160	63.2	6.837	2045		.1	35.4	2.5			93

FORM 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64
USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68-70 YEARS | MAY MONTH

 2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
86/ 85						.0		.0										2	2		
84/ 83					.1	.1	.1	.0										8	8		
82/ 81				.1	.2	.1	.1											11	11		
80/ 79			.1	.0	.5	.3	.0	.0										21	21		
78/ 77		.1	1.4	1.2	.7	.4	.4											88	88	2	
76/ 75		1.6	4.6	2.5	.9	.6	.1											213	213	18	2
74/ 73		2.9	6.6	3.2	.9	.4	.1	.1	.0									295	295	86	41
72/ 71	.5	6.0	5.4	2.5	1.1	.4	.1	.1										331	331	249	133
70/ 69	.8	6.5	6.3	2.3	.7	.5	.2	.1										356	356	389	286
68/ 67	1.1	4.9	4.3	1.5	.7	.6	.2	.1	.0									274	274	355	370
66/ 65	.4	3.1	3.0	1.2	1.1	.4	.1	.1	.0									195	195	311	280
64/ 63	.1	1.5	1.8	1.3	.5	.3		.0										116	117	197	255
62/ 61	.0	.6	1.1	.8	.2	.1												60	60	137	189
60/ 59	.0	.5	.6	.2	.2	.0	.0											35	39	88	131
58/ 57		.2	.1	.0	.0													10	10	107	91
56/ 55		.1	.1	.3	.1													14	14	48	77
54/ 53		.2	.1	.0														8	8	18	64
52/ 51		.1	.0	.0														4	4	18	43
50/ 49	.1	.0																3	3	16	28
48/ 47																				4	22
46/ 45		.0																1	1	1	15
44/ 43																				1	13
42/ 41																					4
40/ 39																					1
38/ 37																					4
36/ 35																					1
34/ 33																					1
TOTAL	3.2	28.5	35.7	17.5	8.1	4.4	1.7	.7	.1										2046		2045
																		2045		2045	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	13844147	166583	81.5	11.311	2043							
Dry Bulb	10054702	143076	69.9	4.918	2046			72.7	29.0	1.5		93
Wet Bulb	8962004	134974	66.0	5.114	2045			50.0	4.8			93
Dew Point	8393376	130382	63.8	6.283	2045			37.8	2.0			93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 4th=66,68-69 (YEARS) JUN (MONTH)

 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	> 31					
86/ 85				.2	.1														4	4		
84/ 83			.3	.2	.1			.1											11	11		
82/ 81		.1	.5	.7	.2	.2	.1	.1											33	33		
80/ 79	.1	.7	3.7	1.5	.5	.2	.1												127	127	14	5
78/ 77		2.9	8.6	2.3	.6	.3													276	276	43	17
76/ 75	.2	6.7	9.6	2.5	.5	.1													370	370	192	98
74/ 73	.5	8.9	7.2	1.9	.4	.2													360	360	356	271
72/ 71	1.3	8.4	4.9	1.0	.4	.1													303	303	459	418
70/ 69	1.2	4.9	2.8	1.0	.2														189	189	342	379
68/ 67	.3	2.1	2.1	.3	.1		.1												92	92	192	273
66/ 65	.2	1.2	1.3	.1	.2	.1													55	55	120	154
64/ 63	.1	1.0	.6	.1	.1														34	34	81	97
62/ 61	.1	.4	.3	.1															15	15	41	74
60/ 59	.1	.5	.3	.1															17	17	20	53
58/ 57		.2																	4	4	18	24
56/ 55																					12	10
54/ 53																						9
52/ 51																						5
50/ 49																						1
48/ 47																						2
TOTAL	3.8	37.9	42.2	11.6	3.1	1.0	.3	.1											1890	1890	1890	1890

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	> 73 F	> 80 F	≥ 93 F	Total
Rel. Hum.	14241661	163441	86.5	7.555	1890							
Dry Bulb	10221550	138754	73.4	4.301	1890			84.0	56.2	4.5		90
Wet Bulb	9404709	133094	70.4	4.084	1890			76.1	28.8	.3		90
Dew Point	9045532	130478	69.0	4.477	1890			69.6	18.6	.0		90

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | JUN MONTH

 0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83			.1	.1														2	2		
82/ 81		.1	.3	.1														9	9		
80/ 79	.1	.4	1.5	.1	.1	.1	.1											41	41	5	3
78/ 77	.1	2.4	4.1	1.0	.4	.2												155	155	18	10
76/ 75	.4	7.0	6.8	.9	.1	.1												294	294	112	63
74/ 73	.7	10.0	7.6	.7	.3	.2												372	372	267	201
72/ 71	2.2	11.1	5.5	1.2	.4													392	392	439	367
70/ 69	2.4	6.8	2.3	.7	.1													274	274	421	425
68/ 67	.8	3.6	2.0	.6	.2													139	139	241	316
66/ 65	.5	3.4	1.6	.4		.1												114	114	143	161
64/ 63	.2	2.1	.6	.1	.1													60	60	121	119
62/ 61		.6	.2	.1														17	17	70	110
60/ 59	.1	.8	.3	.1	.1													26	26	27	60
58/ 57	.2	.5	.1	.1														16	16	24	33
56/ 55		.2	.1															5	5	20	25
54/ 53																				5	8
52/ 51																				3	8
50/ 49																					4
48/ 47																					2
44/ 43																					1
TOTAL	7.6	50.9	33.1	6.1	1.7	.6	.1											1916	1916	1916	1916

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15251260	170412	88.9	7.027	1916							
Dry Bulb	9865843	137235	71.6	4.353	1916			78.8	41.0	1.1		90
Wet Bulb	9227126	132706	69.3	4.314	1916			70.6	18.9			90
Dew Point	8937494	130550	68.1	4.697	1916			65.1	13.0			90

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM MAY BE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

PAGE 1 0600-0800 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
90/ 89						.1	.1	.1	.1									4	4		
88/ 87					.1	.2												5	5		
86/ 85				.1	.2	.4	.1											14	14		
84/ 83			.1	1.2	.9	.8	.1											59	59		
82/ 81		.1	.0	2.3	1.1	.3	.2											87	87	1	
80/ 79		.5	3.5	3.8	1.3	.5	.2											190	190	8	1
78/ 77		1.9	7.1	3.7	.9	.3	.1											273	273	70	10
76/ 75	.2	5.7	7.5	2.0	.7	.2	.1											323	323	236	94
74/ 73	.3	7.3	7.0	.9	.6	.4	.1	.1										326	326	397	301
72/ 71	.7	8.0	4.2	1.3	.6	.1	.1	.1										295	295	425	441
70/ 69	.9	4.1	2.4	.9	.3	.2												172	172	331	399
68/ 67	.4	1.7	1.7	.6	.4	.1												93	93	185	258
66/ 65	.1	1.1	1.4	.4	.2	.1												63	63	110	131
64/ 63	.1	.8	.5	.1	.1													31	31	89	98
62/ 61	.1	.5	.1	.2														15	15	57	101
60/ 59	.1	.2	.2		.2													12	12	32	49
58/ 57		.2	.1															4	4	12	32
56/ 55		.1	.1															2	2	10	21
54/ 53																				2	10
52/ 51																				3	11
50/ 49																					1
48/ 47																					1
44/ 43																					3
TOTAL	2.7	32.0	36.3	17.2	7.3	3.5	.9	.2	.1										1968		1968
																		1968		968	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13992644	164960	83.8	9.173	1968							
Dry Bulb	10885538	146046	74.2	4.909	1968			84.2	58.6	12.2		90
Wet Bulb	9828650	138816	70.5	4.340	1968			75.6	32.6	.2		90
Dew Point	9370929	135473	68.8	4.796	1968			69.1	18.8	.0		90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-69 YEARS — JUN MONTH

 0900-1100 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
100/ 99										.1								1	1		
98/ 97									.1	.1	.1							4	4		
96/ 95								.1	.3	.3								12	12		
94/ 93							.1	.3	.4	.2	.1	.1						22	22		
92/ 91					.1		.6	.8	.6	.3	.1	.1						49	49		
90/ 89					.1	1.0	2.1	1.3	1.0	.3	.1							115	115		
88/ 87				.1	.6	2.5	3.4	1.9	.7	.3	.1							188	188		
86/ 85				.3	2.7	5.3	3.3	1.3	.4	.2	.1							267	267	1	
84/ 83			.1	1.6	4.3	4.4	1.7	.9	.5	.1	.1							268	268		1
82/ 81		.1	.4	3.3	6.0	2.7	1.9	.8	.5	.1	.1							312	312	11	1
80/ 79		.1	1.5	5.7	3.8	1.7	1.2	.9	.4	.1	.1							302	302	92	2
78/ 77		.4	1.6	2.0	1.9	.9	.9	.6	.2	.1								167	167	266	30
76/ 75		.5	1.4	1.5	.9	.6	.7	.3		.1								115	115	427	142
74/ 73		1.0	.7	.9	.7	.4	.2	.3	.1									82	82	468	314
72/ 71		.5	.3	.3	.2	.1	.3	.1	.1									33	33	274	446
70/ 69		.3	.1	.2			.1											11	11	171	338
68/ 67		.1	.1			.1												4	4	96	229
66/ 65		.3	.1		.1													8	8	71	135
64/ 63		.1	.1	.1														4	4	49	99
62/ 61				.1	.1	.1												3	3	17	66
60/ 59					.1													1	1	13	61
58/ 57																				9	29
56/ 55																					24
54/ 53																				1	22
52/ 51																				2	9
50/ 49																					8
48/ 47																					6
46/ 45																					4
44/ 43																					2
TOTAL		3.1	6.3	15.9	21.2	19.7	16.3	9.3	5.2	2.1	.7	.1							1968		1968
																		1968		1968	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	8734814	129042	65.6	11.792	1968							
Dry Bulb	13327496	161628	82.1	5.222	1968			89.3	87.1	63.8	1.8	90
Wet Bulb	10533511	143743	73.0	4.188	1968			82.6	57.9	1.7		90
Dew Point	9421620	135754	69.0	5.393	1968			68.7	22.4	.1		90

FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEURGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

 1200-1400 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
104/103												.1	.1					2	2		
102/101											.1		.1		.1			5	5		
100/ 99										.1	.2	.2	.1	.1				13	13		
98/ 97										.3	.5	.6	.2					31	31		
96/ 95				.1		.1	.1	.3	.5	.8	.9	.3	.1					59	59		
94/ 93							.1	.8	1.7	.8	.8	.3	.1					89	89		
92/ 91					.1	.4	1.4	2.5	2.3	1.1	.9	.5						177	177		
90/ 89					.1	1.4	3.9	3.3	2.2	1.1	.8	.2						252	252	1	1
88/ 87					.7	2.4	4.9	3.8	1.3	.7	.3							274	274		
86/ 85			.1	.2	1.4	4.5	3.6	1.7	1.3	.8	.2	.1	.2					272	272	2	
84/ 83			.2	.4	2.7	3.8	2.2	1.2	1.2	.7	.1	.2						249	249	3	1
82/ 81			.2	1.3	2.7	2.4	1.2	1.1	1.0	.5	.1	.1						205	205	27	2
80/ 79		.2	.6	1.4	1.7	.7	.8	.5	.5	.3								130	130	151	10
78/ 77		.4	.8	.9	.8	.5	.4	.2	.2	.1								82	82	348	36
76/ 75		.6	.6	.5	.2	.1	.1	.2	.2									45	45	444	146
74/ 73		.7	.3	.5	.1			.1	.1									33	33	367	268
72/ 71	.1	.2	.2	.1	.1			.1										14	14	254	391
70/ 69	.1	.2						.1										6	6	140	320
68/ 67		.1	.1															2	2	95	248
66/ 65		.2	.2															6	6	55	149
64/ 63		.1																1	1	29	108
62/ 61		.1	.1	.1														4	4	23	84
60/ 59		.1			.1													2	2	5	63
58/ 57																				8	41
56/ 55																					30
54/ 53																				1	16
52/ 51																					11
50/ 49																					14
48/ 47																					7
46/ 45																					3
44/ 43																					3
42/ 41																					1
TOTAL	.2	2.5	3.2	5.3	10.5	16.2	18.5	15.8	12.4	7.2	4.8	2.5	.8	.1	.1			1953	1953		1953
																				1953	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6938451	113509	58.1	13.222	1953							
Dry Bulb	14416524	167410	85.7	5.825	1953			89.4	88.4	78.8	9.2	90
Wet Bulb	10678980	144184	73.8	4.193	1953			84.4	61.9	4.0		90
Dew Point	9241104	133870	68.5	5.765	1953			65.6	21.4	.2		90

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUN (MONTH)

 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B	Dry Bulb	Wet Bulb	Dew Point
104/103												.1	.1		.1	.1		4	4		
102/101											.1	.1	.2		.3			12	12		
100/ 99									.1	.1	.3	.2	.2	.2				16	16		
98/ 97								.1	.1	.1	.3	.4	.3					21	21		
96/ 95								.2	.4	.6	.7	.3	.1	.1				44	44		
94/ 93							.1	.3	.3	.5	.7	.6	.3	.1				55	55		
92/ 91						.2	1.4	1.3	.8	.6	.5	.4						100	100		
90/ 89			.1		.3	1.0	2.3	2.4	1.1	.6	.4	.1						160	160		
88/ 87				.1	.9	3.3	3.9	2.4	1.2	.5	.1		.1					242	242		
86/ 85				.4	2.0	4.4	3.8	1.4	.7	.7	.5	.2	.1					277	277	2	
84/ 83			.1	.8	3.3	5.2	1.7	1.0	1.0	.5	.3	.2						273	273	2	1
82/ 81		.2	.5	2.0	3.2	3.5	1.6	1.3	.8	.5	.1							267	267	26	1
80/ 79		.1	1.3	2.4	2.0	1.6	1.1	.4	.4	.2								185	185	129	10
78/ 77		.4	1.8	1.0	.6	.4	.5	.3										96	96	286	49
76/ 75		1.1	2.0	.7	.4	.2	.1		.3									93	93	441	157
74/ 73	.1	1.1	1.2	.3	.3			.1										59	59	401	222
72/ 71	.3	.6	.1		.1		.1											23	23	288	384
70/ 69	.2	.2					.1											8	8	175	325
68/ 67	.1	.2	.2	.1														10	10	91	228
66/ 65		.1	.1															3	3	58	140
64/ 63		.1	.1															2	2	33	102
62/ 61																				10	92
60/ 59		.2																3	3	9	57
58/ 57																				2	47
56/ 55																					23
54/ 53																					16
52/ 51																					8
50/ 49																					16
48/ 47																					3
46/ 45																					2
TOTAL	.6	4.1	7.3	7.6	13.1	19.8	16.6	11.2	7.1	4.7	3.8	2.3	1.1	.3	.4	.1		1953	1953	1953	1953

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	7942579	121095	62.0	14.913	1953							
Dry Bulb	13909907	164397	84.2	6.053	1953			89.6	87.7	73.2	7.0	90
Wet Bulb	10604262	143702	73.6	3.963	1953			84.8	59.3	4.0		90
Dew Point	9318002	134462	68.8	5.564	1953			66.7	23.5	.2		90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-66,68-69 YEARS — JUN MONTH

PAGE 1 — 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
102/101												.1		.1				2	2		
100/ 99														.1				1	1		
98/ 97											.1	.1	.1	.1				4	4		
96/ 95								.1		.1	.1		.1					5	5		
94/ 93							.2	.3	.1	.1	.2	.1						16	16		
92/ 91						.1	.1	.1	.1	.3	.1	.1						15	15		
90/ 89					.1	.6	.4	.4	.3	.2	.5							47	47		
88/ 87			.1	.1	.8	1.2	.7	.4	.2	.2								68	68		
86/ 85				.5	2.1	1.7	1.0	.6	.5	.1								122	122		
84/ 83			.1	2.2	2.9	2.4	1.3	.4	.2	.1	.1							182	182	2	1
82/ 81			.5	4.9	4.9	2.2	.8	.4	.1	.2	.1							266	266	14	
80/ 79	.1	.3	3.4	5.5	4.3	1.6	1.3	.2	.4	.1								325	325	61	8
78/ 77	.1	.8	5.5	5.9	2.3	1.4	.6	.2	.2									320	320	169	51
76/ 75	.1	2.0	4.9	2.9	1.5	.9	.3	.1										238	238	324	138
74/ 73	.3	2.8	2.3	1.3	.9	.4	.2	.2										159	159	450	291
72/ 71	.6	1.4	.5	.5	.5	.2	.1											70	70	393	414
70/ 69	.3	.5	.3	.2	.1		.1											28	28	236	349
68/ 67	.1	.3	.1		.2	.1												12	12	108	231
66/ 65		.1	.1	.1	.1													5	5	69	119
64/ 63		.1																1	1	35	97
62/ 61																				16	78
60/ 59	.1	.1																3	3	8	47
58/ 57																				4	26
56/ 55																					14
54/ 53																					11
52/ 51																					8
50/ 49																					5
48/ 47																					1
TOTAL	1.6	8.3	17.6	24.0	20.6	12.9	7.0	3.3	1.9	1.3	1.0	.3	.1	.2				1889	1889		1889
																		1889		1889	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	10292941	137243	72.7	13.054	1889							
Dry Bulb	11981064	150134	79.5	5.079	1889			89.6	84.3	42.7	1.3	90
Wet Bulb	9968776	137047	72.5	3.784	1889			83.7	48.6	2.0		90
Dew Point	9145083	131113	69.4	4.806	1889			70.7	23.3	.1		90

FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68-69 YEARS | JUN MONTH

 2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
90/ 89						.1												2	2		
88/ 87				.2	.2	.1			.1									11	11		
86/ 85				.3	.2	.1	.1		.2									15	15		
84/ 83			.3	1.2	.6	.1	.1	.2										48	48		
82/ 81		.1	1.7	3.1	.8	.2	.2	.1										115	115	5	
80/ 79		.6	6.4	5.8	1.2	.3	.2											273	273	27	5
78/ 77	.1	1.9	9.2	3.5	1.5	.4	.1											316	316	100	46
76/ 75	.1	5.1	10.5	3.7	1.2	.1	.1											392	392	277	124
74/ 73	.4	6.6	6.9	2.5	.9	.3	.1											332	332	396	336
72/ 71	.6	4.4	3.5	2.0	.6	.1	.1											214	214	471	437
70/ 69	.2	1.7	1.2	1.3	.3	.1												90	90	286	356
68/ 67	.2	.4	1.1	.1	.1	.1												36	36	148	240
66/ 65		.2	.7	.3	.1													23	23	80	123
64/ 63	.1	.1	.3	.2														11	11	49	80
62/ 61	.1		.3	.1														8	8	27	70
60/ 59	.1	.1		.1														4	4	13	36
58/ 57																				10	18
56/ 55																				1	7
54/ 53																					8
52/ 51																					4
TOTAL	1.7	21.1	42.3	24.2	7.6	1.9	.8	.2	.2									1890	1890	1890	1890

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13002559	155971	82.5	8.333	1890							
Dry Bulb	10838429	142909	75.6	4.155	1890			87.8	71.6	15.3		90
Wet Bulb	9718431	135333	71.6	3.846	1890			81.4	38.3	.9		90
Dew Point	9238665	131885	69.8	4.340	1890			73.5	24.3	.1		90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-66,68-69 (YEARS) JUL (MONTH)

 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
86/ 85					.1													1	1		
84/ 83			.3	.3	.2	.2												18	18		
82/ 81		.2	1.1	.9	.1	.2												48	48	1	
80/ 79	.1	1.5	6.8	2.7	.3													221	221	15	5
78/ 77	.2	7.6	11.4	2.7	.4													434	434	102	43
76/ 75	1.1	13.0	9.5	2.3	.3													512	512	407	224
74/ 73	2.0	14.9	6.0	.8	.1	.1												468	468	609	544
72/ 71	.7	6.1	2.2	.4		.1												184	184	486	570
70/ 69	.6	.8	1.2	.1														52	52	233	336
68/ 67	.1	.1	.9	.1														14	14	67	136
66/ 65																				26	59
64/ 63																				5	26
62/ 61																				1	4
60/ 59																					4
58/ 57																					1
TOTAL	4.8	44.2	38.9	10.2	1.4	.5													1952		1952
																		1952		1952	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Ref. Hum.	15237174	171988	88.1	6.544	1952							
Dry Bulb	11153151	147447	75.5	2.822	1952			93.0	81.1	7.6		93
Wet Bulb	10370532	142192	72.8	2.547	1952			91.5	54.0	.2		93
Dew Point	10049518	139952	71.7	2.811	1952			88.5	38.9			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | JUL MONTH

PAGE 1 | 0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83					.1													2	2		
82/ 81			.3	.2														9	9		
80/ 79		.4	2.2	.6	.2													65	65	2	1
78/ 77	.2	5.3	5.7	1.1	.2													245	245	32	19
76/ 75	1.2	13.9	9.9	1.4														521	521	244	122
74/ 73	3.4	19.7	6.9	.7														608	608	555	433
72/ 71	2.9	10.5	3.6	.1														338	338	652	652
70/ 69	1.3	3.9	1.9	.1	.1													143	143	315	422
68/ 67		.9	.8	.1														35	35	124	211
66/ 65		.3	.4															13	13	34	76
64/ 63																				14	27
62/ 61																				7	11
60/ 59																					5
TOTAL	8.9	54.8	31.6	4.1	.5													1979	1979		1979
																		1979		1979	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	16225145	178831	90.4	5.741	1979							
Dry Bulb	10850969	146447	74.0	2.643	1979			92.4	68.1	1.4		93
Wet Bulb	10241340	142278	71.9	2.526	1979			90.4	39.1			93
Dew Point	9981072	140438	71.0	2.755	1979			87.4	27.0			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PAGE 1 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
88/ 87						.1												3	3		
86/ 85					.7	.3												21	21		
84/ 83			.3	1.4	1.2		.1											60	60		
82/ 81			1.8	4.2	1.3	.2	.0											155	155		
80/ 79		.9	6.3	4.9	1.1	.2	.1											273	273	12	1
78/ 77	.1	4.9	10.0	3.1	.3	.1												376	376	151	36
76/ 75	.7	10.8	10.4	1.4	.0	.0	.0											478	478	432	238
74/ 73	1.6	11.3	5.4	.8	.1	.0												391	391	608	523
72/ 71	1.0	4.8	2.8	.0		.0												178	178	506	621
70/ 69	.3	1.8	1.3	.2	.0													76	76	205	367
68/ 67	.1	.3	.2	.0														16	16	80	146
66/ 65		.1	.1															4	4	24	58
64/ 63																				10	23
62/ 61																				3	9
60/ 59																					2
58/ 57																					5
56/ 55																					1
TOTAL	3.9	35.0	38.7	16.1	4.8	1.2	.3											2031	2031	2031	2030

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15158657	174723	86.1	7.696	2030							
Dry Bulb	11811367	154719	76.2	3.514	2031			92.8	80.5	16.4		93
Wet Bulb	10819735	148139	72.9	2.685	2031			91.3	55.1			93
Dew Point	10422279	145341	71.6	2.840	2030			88.5	36.6			93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
98/ 97												.0						1	1		
96/ 95								.0	.1	.1	.0							6	6		
94/ 93								.4	.3	.1			.0					18	18		
92/ 91						.1	.9	1.0	.1									46	46		
90/ 89						1.3	3.2	2.0	.3	.1	.1							143	143		
88/ 87					1.8	7.4	4.5	1.4	.6	.0								319	319		
86/ 85			.0	.7	5.8	9.0	3.3	1.0	.3	.0								409	409		
84/ 83		.0	.4	3.3	8.2	4.7	.6	.4	.1	.0								363	363		
82/ 81		.1	1.3	6.8	6.1	1.0	.5	.3	.0		.0							330	330	10	
80/ 79		.3	3.0	4.1	1.0	.3	.1	.0		.0								181	181	169	4
78/ 77		.9	3.3	1.1	.2	.2	.0	.1										118	118	563	74
76/ 75	.2	.9	.8	.3			.0											48	48	743	332
74/ 73	.1	1.1	.2	.0														30	30	362	678
72/ 71	.1	.3		.1														11	11	111	572
70/ 69	.1	.0	.2															7	7	48	206
68/ 67																				12	69
66/ 65																				8	41
64/ 63																				2	24
62/ 61																				2	13
60/ 59																					9
58/ 57																					5
56/ 55																					1
52/ 51																					1
48/ 47																					1
TOTAL	.6	3.8	9.2	16.6	23.0	24.1	13.3	6.7	1.9	.6	.2	.0	.0					2030	2030	2030	2030

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9980505	140725	69.3	10.532	2030							
Dry Bulb	14283198	170074	83.8	4.114	2030			93.0	92.2	79.6	1.1	93
Wet Bulb	11610816	153446	75.6	2.428	2030			92.5	84.6	3.0		93
Dew Point	10631278	146776	72.3	3.049	2030			88.6	49.8	.0		93

FORM JUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
102/101													.0					1	1		
100/ 99										.0	.0	.1						4	4		
98/ 97								.0	.2	.8	.5	.1	.0					35	35		
96/ 95								.3	.8	1.0	.7		.1					61	61		
94/ 93						.0	.4	1.6	3.1	1.3	.6	.1						148	148		
92/ 91						.1	3.4	4.8	2.8	.5	.2	.1						241	241		
90/ 89				.0	.1	2.8	8.1	5.4	1.7	.8	.2	.0						389	389		
88/ 87				.0	1.1	3.5	7.6	2.4	.9	.2	.1	.1						362	362		
86/ 85				.3	3.0	6.8	3.6	.9	.5			.1						307	307		
84/ 83			.3	.8	3.0	2.3	.8	.2	.4									161	161	3	
82/ 81		.0	.3	2.6	1.0	.5	.3	.1	.0									105	105	41	2
80/ 79	.0	.1	1.4	1.8	.5	.1	.1											81	81	313	6
78/ 77		.5	1.4	.4	.2													52	52	653	68
76/ 75		1.0	.2	.3	.0													32	32	607	305
74/ 73	.2	.8	.2	.2														30	30	230	600
72/ 71	.1	.2	.0															7	7	108	482
70/ 69																				46	291
68/ 67																				12	117
66/ 65																				2	58
64/ 63																				1	44
62/ 61																					21
60/ 59																					13
58/ 57																					5
56/ 55																					1
52/ 51																					2
50/ 49																					1
TOTAL	.3	2.7	4.2	6.6	9.1	18.2	24.4	15.9	10.7	4.7	2.5	.6	.2					2016	2016		2016
																				2016	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	< 93 F	Total
Rel. Hum.	7886248	123754	61.4	11.911	2015							
Dry Bulb	15410513	175985	87.3	4.883	2016			93.0	92.7	86.0	11.5	93
Wet Bulb	11733831	153717	76.2	2.553	2016			92.9	85.2	7.4		93
Dew Point	10421580	144784	71.8	3.419	2016			86.3	45.3	.2		93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) JUL (MONTH)

PAGE 1 1500-1700 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
104/103												.0		.0				2	2		
102/101													.0					1	1		
100/ 99											.1	.0						4	4		
98/ 97								.0	.0	.4	.3	.2						21	21		
96/ 95								.3	.7	.8	.3	.1						44	44		
94/ 93							.5	1.6	2.2	1.1	.5	.1	.0					124	124		
92/ 91						.6	2.2	1.8	1.4	.3	.3	.1	.0					137	137		
90/ 89					.3	2.2	3.2	2.8	.7	.3	.5	.0						243	243		
88/ 87				.1	1.6	7.1	5.3	1.9	.6	.2	.1	.0						346	346		
86/ 85				.8	4.4	6.8	2.9	1.0	.6	.1								335	335		
84/ 83		.0	.2	1.7	3.5	3.0	.6	.6	.1									199	199	2	
82/ 81			1.0	3.6	2.1	.7	.3	.1	.0									160	160	86	
80/ 79	.0	.5	2.3	2.5	.6	.1	.0											124	124	276	18
78/ 77		1.3	2.3	.7	.2													93	93	548	115
76/ 75	.4	2.0	1.1	.6														85	85	579	331
74/ 73	.3	1.8	.9	.1														67	67	303	558
72/ 71	.3	.9	.2															30	30	154	480
70/ 69		.0																1	1	89	268
68/ 67																				9	112
66/ 65																					57
64/ 63																					30
62/ 61																					26
60/ 59																					14
58/ 57																					5
56/ 55																					2
TOTAL	1.4	6.5	8.1	10.3	12.8	20.5	17.1	10.2	6.5	3.3	2.1	.8	.1	.0					2016		2016
																		2016		2016	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≥ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9233617	133557	66.2	13.835	2016							
Dry Bulb	14742342	172016	85.3	5.680	2016			93.0	91.6	77.5	9.0	93
Wet Bulb	11624838	152986	75.9	2.761	2016			93.0	81.4	7.4		93
Dew Point	10502816	145342	72.1	3.487	2016			86.8	47.1	.2		93

USAFETAC FORM 101 64 0-26-5 (OL) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68-69 YEARS | JUL MONTH

 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
96/ 95									.1	.2		.1						5	5		
94/ 93							.1		.2	.3								9	9		
92/ 91						.2	.4	.3	.4	.1	.1							27	27		
90/ 89					.2	.7	.4	.5	.3	.1	.1							44	44		
88/ 87				.2	1.1	1.5	1.2	.1	.1	.2								85	85		
86/ 85			.1	1.4	4.7	3.0	.9	.2	.1	.1								204	204		
84/ 83		.1	.7	4.6	6.3	2.5	1.0	.3	.1									303	303	1	
82/ 81		.3	2.6	9.4	4.7	1.5	.3	.2										368	368	19	1
80/ 79	.1	.7	6.1	5.7	2.5	.8	.4	.1										316	316	116	22
78/ 77	.1	2.5	5.6	3.1	.6	.3		.1										238	238	385	95
76/ 75	.6	3.8	4.2	.8	.4	.1	.1											194	194	604	331
74/ 73	.5	3.6	1.0	.2														104	104	425	583
72/ 71	.3	1.7	.5															49	49	283	472
70/ 69	.1	.3																6	6	94	256
68/ 67		.1																1	1	22	113
66/ 65																				2	40
64/ 63																				2	22
62/ 61																					11
60/ 59																					4
58/ 57																					1
56/ 55																					2
TOTAL	1.5	13.0	20.0	25.3	20.4	10.7	4.6	1.7	1.0	.8	.1	.1							1953		1953
																		1953		1953	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11706425	149635	76.6	11.127	1953							
Dry Bulb	12773883	157707	80.8	4.462	1953			93.0	90.3	57.8	.7	93
Wet Bulb	10938042	146064	74.8	2.676	1953			92.8	73.8	3.2		93
Dew Point	10247779	141343	72.4	3.076	1953			89.2	49.1	.3		93

FORM JUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13024 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68-69 YEARS | JUL MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85			.1	.6	.3	.3	.1											26	26		
84/ 83			.6	1.8	.5	.2	.1											62	62		
82/ 81		.1	4.0	5.3	.8	.4												206	206	4	2
80/ 79		1.8	13.0	6.3	1.3	.3												442	442	33	5
78/ 77	.1	5.5	11.6	4.4	1.3	.2												451	451	219	74
76/ 75	.7	8.3	7.9	2.6	.5	.1												391	391	555	333
74/ 73	1.6	7.4	2.8	.9	.1	.1												251	251	548	601
72/ 71	.5	3.7	1.1	.2	.2													110	110	390	462
70/ 69	.1	.2	.2	.1														9	9	157	294
68/ 67	.1	.1																3	3	34	112
66/ 65																				8	46
64/ 63																				3	14
62/ 61																					4
60/ 59																					3
58/ 57																					1
TOTAL	3.0	27.1	41.3	22.0	5.0	1.4	.1											1951	1951	1951	1951

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14096741	165189	84.7	7.523	1951							
Dry Bulb	11700834	150968	77.4	3.118	1951			93.0	87.2	24.5		93
Wet Bulb	10632076	143940	73.8	2.535	1951			92.5	64.8	.7		93
Dew Point	10206911	141009	72.3	2.815	1951			89.8	48.4	.1		93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68-69 YEARS | AUG MONTH

0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
86/ 85				.1		.1												2	2		
84/ 83			.2	.4	.1	.1												15	15		
82/ 81		.2	1.3	1.1	.2	.2	.1											58	58		
80/ 79	.1	2.2	7.0	2.0	.2	.2												225	225	15	3
78/ 77	.6	7.0	9.8	2.6	.1													392	392	119	63
76/ 75	1.2	12.5	10.2	1.2	.1	.2												496	496	391	253
74/ 73	2.2	13.0	6.5	.8	.4													444	444	587	488
72/ 71	1.2	5.8	2.6	.4														195	195	485	538
70/ 69	.5	2.4	1.4	.4	.1													92	92	199	343
68/ 67	.3	.5	.6	.1	.1													28	28	98	141
66/ 65		.1	.2															5	5	44	65
64/ 63	.1																	1	1	12	38
62/ 61																				3	14
60/ 59																					4
58/ 57																					3
TOTAL	6.0	43.6	39.7	8.9	1.1	.7	.1												1953		1953
																		1953		1953	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature					
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15352939	172675	88.4	6.631	1953							
Dry Bulb	11103644	147138	75.3	3.066	1953			92.7	77.7	8.1		93
Wet Bulb	10341257	142007	72.7	2.828	1953			90.2	53.0	.0		93
Dew Point	10033480	139852	71.6	3.107	1953			87.1	38.4			93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

PAGE 1 0300-0500 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83					.1													1	1		
82/ 81		.1	.2	.2	.1													9	9		
80/ 79		1.2	2.1	.4	.1													74	74	1	
78/ 77	.3	4.7	6.0	.9	.2													239	239	46	22
76/ 75	2.1	13.5	8.3	.9	.2													494	494	252	169
74/ 73	3.2	17.0	7.0	.6	.1													552	552	512	409
72/ 71	3.5	11.5	3.2	.3	.1													367	367	586	558
70/ 69	1.0	4.5	1.4	.3														141	141	337	440
68/ 67	.9	1.6	1.3	.2	.1													80	80	140	209
66/ 65	.3	.3	.3															16	16	68	91
64/ 63	.1	.3																6	6	30	49
62/ 61																				6	25
60/ 59																				1	4
58/ 57																					2
56/ 55																					1
TOTAL	11.2	54.6	29.8	3.7	.7														1979		1979
																		1979		1979	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	16334019	179413	90.7	5.894	1979							
Dry Bulb	10778369	145937	73.7	2.894	1979			92.0	64.3	1.6		93
Wet Bulb	10196333	141941	71.7	2.828	1979			86.1	38.1			93
Dew Point	9941637	140133	70.8	3.084	1979			84.9	28.2			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
86/ 85				.1	.0	.3	.0											10	10		
84/ 83			.1	1.0	.8	.2												45	45		
82/ 81		.0	1.5	2.9	.9	.3												114	114		
80/ 79		1.4	4.9	3.3	.6	.1												211	211	16	2
78/ 77	.4	5.2	9.2	2.8	.3	.1												367	367	114	51
76/ 75	1.5	10.3	8.6	1.1	.1													440	440	403	203
74/ 73	2.4	12.2	5.9	1.1	.4													447	447	559	520
72/ 71	1.4	6.1	2.2	.4	.2													208	208	488	556
70/ 69	.8	2.9	1.7	.4														118	118	238	357
68/ 67	.3	1.0	1.0	.2	.0													53	53	117	164
66/ 65	.1	.4	.2	.0														17	17	60	93
64/ 63		.1																3	3	31	45
62/ 61																				5	28
60/ 59																				2	11
58/ 57																					2
56/ 55																					1
TOTAL	6.9	39.7	35.4	13.3	3.5	1.1	.0											2033		2033	2033
																			2033		

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15643996	177658	87.4	7.652	2033							
Dry Bulb	11563823	152147	75.3	3.657	2033			92.1	74.7	12.4		93
Wet Bulb	10689288	147284	72.4	3.063	2033			88.5	50.0	.0		93
Dew Point	10335587	144803	71.2	3.276	2033			84.8	35.5			93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | AUG MONTH

 0900-1100 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
98/ 97											.0	.1						3	3		
96/ 95							.0	.0	.1	.1				.0				8	8		
94/ 93								.3	.3	.4	.0							23	23		
92/ 91						.2	1.1	1.1	.4	.2		.0						63	63		
90/ 89					.2	1.4	3.1	1.6	.4	.1	.0							139	140		
88/ 87				.1	1.1	5.3	4.2	1.2	.2									249	249		
86/ 85			.1	.9	5.8	8.0	2.8	.8	.0	.0								377	377		
84/ 83			.6	3.3	7.9	4.1	1.6	.3	.2	.0								366	366	1	
82/ 81		.0	1.4	6.2	4.7	1.2	1.0	.5	.0									307	308	27	
80/ 79		.7	1.8	4.4	2.2	.8	.3		.0									259	210	151	21
78/ 77	.2	.9	3.3	1.5	.4	.4	.0											140	141	544	95
76/ 75	.0	1.0	1.1	.6	.5	.1												68	68	651	282
74/ 73	.2	1.1	.3	.2	.1	.0												43	43	339	614
72/ 71	.0	.1	.3	.2	.1	.1												19	19	173	496
70/ 69	.1	.1	.2		.0	.0												12	12	74	246
68/ 67		.0		.1														4	4	49	112
66/ 65																				13	80
64/ 63																				2	42
62/ 61																				6	24
60/ 59																					8
58/ 57																					8
56/ 55																					2
TOTAL	.6	4.1	9.3	17.6	23.1	21.9	14.2	6.1	1.6	1.0	.1	.1		.0				2030	2034	2030	2030

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9994406	140748	69.3	10.780	2030							
Dry Bulb	14182922	169592	83.4	4.577	2034			93.0	91.4	76.2	1.6	93
Wet Bulb	11504736	152706	75.2	2.935	2030			92.0	78.9	4.1		93
Dew Point	10523852	145990	71.9	3.496	2030			85.5	46.4	.1		93

USAFETAC FORM 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-69 YEARS — AUG MONTH

PAGE 1 — 1200-1400 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
106/105														.0				1	1		
102/101												.0	.0	.1				5	5		
100/ 99									.1	.0	.1	.1	.1					11	11		
98/ 97									.3	.2	.4	.2	.0					25	25		
96/ 95								.5	1.5	1.1	.8			.1				82	82		
94/ 93							.7	2.3	3.6	1.4	.5							171	171		
92/ 91						.7	2.5	4.7	2.3	.7	.2							226	226		
90/ 89					.1	1.4	5.9	6.0	1.9	.7	.0							324	324		
88/ 87				.1	1.0	4.4	8.6	2.4	.8	.3	.1							357	357		
86/ 85			.0	.3	2.2	4.3	3.9	2.4	.8	.2	.0							287	287		
84/ 83			.1	1.2	2.1	2.2	1.3	.9	.4	.0								169	170	4	
82/ 81		.1	.3	1.8	1.3	.8	.7	.3										112	113	70	
80/ 79		.3	1.0	1.5	.5	.7	.3											90	90	257	22
78/ 77	.0	.9	1.2	.5	.2	.0		.1										62	62	591	77
76/ 75	.2	.9	.7	.2		.1												45	45	571	236
74/ 73	.0	.8	.4	.1	.1	.0												34	34	255	496
72/ 71	.2	.5																14	14	147	513
70/ 69	.0			.1														3	3	92	305
68/ 67				.0														1	1	20	146
66/ 65																				6	106
64/ 63																				5	58
62/ 61																				1	28
60/ 59																					22
58/ 57																					7
56/ 55																					3
TOTAL	.6	3.6	3.9	6.0	7.7	14.7	24.0	19.7	11.6	4.9	2.4	.4	.2	.3					2021		2019
																		2019		2019	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum.	7783643	122829	60.8	12.417	2019							
Dry Bulb	15381690	175976	87.1	5.395	2021			93.0	92.2	84.1	13.6	93
Wet Bulb	11636848	153162	75.9	2.981	2019			92.4	80.5	8.0		93
Dew Point	10295438	143976	71.3	3.753	2019			82.7	38.3	.4		93

USAFETAC FORM 0-26-5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | AUG MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
104/103															.0			1	1		
102/101									.0					.1				3	3		
100/ 99										.0	.1	.0	.1	.0	.1			10	10		
98/ 97								.0	.2	.6	.4	.1		.1				32	32		
96/ 95							.0	.1	1.0	.6	.4	.2	.1					50	50		
94/ 93							.3	1.2	2.1	1.1	.2							100	100		
92/ 91						.5	2.4	3.0	1.4	.6	.1	.1						166	166		
90/ 89				.0	.7	2.1	4.2	2.9	.9	.4	.2							233	233		
88/ 87				.0	1.5	4.2	5.8	1.7	1.0	.2	.0							295	295		
86/ 85		.0	.0	.9	3.1	6.8	3.5	1.3	.7	.1								335	335	1	
84/ 83		.1	.2	1.7	4.5	3.4	1.3	1.0	.2									258	258	6	1
82/ 81	.0	.1	.8	3.0	2.6	1.0	1.0	.2	.1									182	182	64	3
80/ 79	.1	.3	1.9	1.6	1.0	.9	.4	.0										127	127	242	21
78/ 77	.1	.8	1.5	.7	.3	.0		.1										74	74	521	117
76/ 75	.2	2.0	1.7	.1	.3	.1	.1											93	93	550	273
74/ 73	.1	1.0	.5	.2														39	39	325	510
72/ 71	.2	.3																11	11	175	476
70/ 69		.3	.0	.1														10	10	101	253
68/ 67	.1																	3	3	27	149
66/ 65																				4	101
64/ 63																				6	57
62/ 61																					29
60/ 59																					26
58/ 57																					4
56/ 55																					2
TOTAL	1.0	5.1	6.8	8.5	14.0	19.1	19.3	11.7	7.9	3.9	1.6	.5	.2	.2	.1			2022	2022		2022
																		2022		2022	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	8815212	130726	64.7	13.412	2022							
Dry Bulb	14848864	172905	85.5	5.602	2022			93.0	91.9	79.3	9.0	93
Wet Bulb	11573240	152848	75.6	3.073	2022			92.5	78.6	8.2		93
Dew Point	10388392	144718	71.6	3.896	2022			82.9	42.5	.6		93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) AUG (MONTH)

1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
96/ 95							.1				.1							2	2		
94/ 93							.1	.1	.1	.1	.1		.1					7	7		
92/ 91						.1	.1	.4				.1						12	12		
90/ 89					.3	.7	1.0	.4	.3									51	51		
88/ 87				.1	1.2	1.9	.5	.2	.1	.1								79	79		
86/ 85			.2	1.2	3.9	3.3	.9	.2	.2	.1								192	192		
84/ 83		.1	1.4	3.9	5.7	1.9	.3	.3	.1									269	269	1	
82/ 81		.2	2.9	7.8	4.8	1.5	.5	.1										347	347	25	4
80/ 79		.7	6.8	7.6	2.6	1.5	.6	.1										388	388	123	21
78/ 77	.2	1.9	5.4	3.7	1.2	.6	.2											258	258	353	106
76/ 75	.6	3.6	3.6	1.2	.6	.4												193	193	589	337
74/ 73	.8	3.2	1.1	.6	.2	.2												118	118	438	555
72/ 71	.2	.7	.3	.2	.1													26	26	242	449
70/ 69	.1	.4	.1	.1	.2													14	14	114	225
68/ 67		.1																1	1	48	109
66/ 65																				18	73
64/ 63																				3	35
62/ 61																				3	23
60/ 59																					15
58/ 57																					5
TOTAL	1.8	10.7	21.5	26.2	20.7	12.1	4.2	1.8	.6	.2	.1	.1	.1					1957	1957		1957
																		1957		1957	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11665576	149612	76.4	10.791	1957							
Dry Bulb	12724376	157582	80.5	4.262	1957			93.0	91.1	56.1	.4	93
Wet Bulb	10902617	145953	74.6	2.987	1957			91.9	72.7	3.4		93
Dew Point	10202353	141129	72.1	3.564	1957			85.8	48.6	.5		93

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-66,68-69 YEARS | AUG MONTH

2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
88/ 87				.1		.1												3	3		
86/ 85			.1	.3	.5		.1											17	17		
84/ 83			1.1	1.5	1.0	.2	.1		.1									77	77		
82/ 81	.1	.5	4.4	3.7	1.1	.3	.1											197	197	4	1
80/ 79	.2	2.1	10.1	4.9	.9	.1	.1											357	357	58	13
78/ 77	.3	6.2	12.3	4.3	.7		.1											465	465	225	104
76/ 75	1.4	9.3	9.2	2.4	.6	.3												452	452	522	327
74/ 73	1.4	6.3	3.6	1.4	.7	.1												262	262	551	553
72/ 71	.3	2.0	1.2	.6														80	80	343	476
70/ 69		.7	.6	.2														29	29	137	239
68/ 67		.3	.1	.2														10	10	68	125
66/ 65		.1	.1															3	3	35	50
64/ 63																				6	37
62/ 61																				3	18
60/ 59																					6
58/ 57																					3
TOTAL	3.6	27.4	42.7	19.5	5.4	1.0	.3		.1									1952	1952	1952	1952

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14179365	165653	84.9	7.657	1951							
Dry Bulb	11641882	150616	77.2	3.232	1952			92.9	87.2	22.7		93
Wet Bulb	10602679	143751	73.6	2.902	1952			90.9	64.8	.9		93
Dew Point	10184967	140853	72.2	3.301	1952			87.6	47.5	.3		93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
82/ 81			.2	.1			.1											6	6		
80/ 79		.4	1.1	.5	.1	.3												43	43		
78/ 77	.2	3.2	4.1	1.1	.4	.2												175	175	21	9
76/ 75	1.3	7.9	6.8	.4	.4													325	325	160	92
74/ 73	2.0	10.5	5.7	1.4														380	380	312	265
72/ 71	2.2	7.9	4.2	1.2	.3													306	306	403	364
70/ 69	1.4	5.5	3.5	1.3	.2	.1												233	233	310	315
68/ 67	.9	4.2	4.7	.6	.4	.2												213	213	213	230
66/ 65	.4	1.8	2.2	.6	.1	.1												100	100	182	192
64/ 63	.2	1.1	1.4	.6	.2	.2												71	71	120	153
62/ 61		.6	.7	.2	.3													32	32	74	101
60/ 59	.1	.3	.6	.5	.1													29	29	50	65
58/ 57		.1	.5	.3	.1													16	16	35	45
56/ 55			.1															1	1	22	23
54/ 53			.1	.1														2	2	22	28
52/ 51					.1													1	1	6	23
50/ 49					.1													1	1	2	16
48/ 47					.1													1	1		4
46/ 45																					5
44/ 43																				1	2
42/ 41																				2	
34/ 33																					2
32/ 31																					1
TOTAL	8.6	43.4	33.6	8.8	2.6	.9	.1												1935		1935
																		1935		1935	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15037359	169829	87.8	8.261	1935							
Dry Bulb	9943736	138422	71.5	4.615	1935			78.2	43.2	1.1		90
Wet Bulb	9248348	133408	68.9	5.114	1935			66.0	22.9			90
Dew Point	8920096	130884	67.6	5.889	1935		.0	59.3	17.0			90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-65 YEARS | SEP MONTH

PAGE 1 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
82/ 81				.1															1	1		
80/ 79		.1	.6	.1															16	16		
78/ 77		1.3	1.0	.4	.4	.1													60	60	2	2
76/ 75	1.2	6.5	4.6	.5	.2														255	255	92	56
74/ 73	3.5	9.5	4.8	.5	.1	.1													361	361	263	199
72/ 71	3.7	10.4	4.0	.7	.2	.1													373	373	392	348
70/ 69	2.1	7.4	3.0	.6	.1														257	257	326	338
68/ 67	1.6	5.0	4.6	.7		.1													235	235	243	279
66/ 65	.9	3.7	2.8	.4	.3	.3													165	165	192	170
64/ 63	.4	2.6	1.5	.4	.1	.1													99	99	171	170
62/ 61		1.2	.8	.6	.2														55	55	99	142
60/ 59		.7	.8	.4	.1														38	38	50	67
58/ 57		.3	.6	.2	.1														21	21	47	54
56/ 55		.2	.2	.1	.1														9	9	43	32
54/ 53			.4	.1															9	9	15	29
52/ 51		.1		.1															2	2	14	32
50/ 49																					4	15
48/ 47																					3	14
46/ 45				.1															2	2		4
44/ 43				.1															1	1		4
42/ 41																						1
40/ 39																					2	
38/ 37																					1	
32/ 31																						2
30/ 29																						1
TOTAL	13.3	48.9	29.7	5.8	1.6	.7													1959		1959	1959
																			1959		1959	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	15793855	175203	89.4	7.977	1959							
Dry Bulb	9677778	137372	70.1	4.782	1959			71.6	31.8	.4		90
Wet Bulb	9099039	133103	67.9	5.321	1959			60.6	16.4			90
Dew Point	8814969	130869	66.8	6.081	1959		.1	56.1	11.8			90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
84/ 83				.1	.1														2	2		
82/ 81			.3	.4	.2														17	17		
80/ 79		.4	2.0	1.0	.2														68	68		
78/ 77		2.7	2.9	1.1	.1														134	134	23	5
76/ 75	.9	6.0	4.3	1.6	.4	.1													261	261	144	82
74/ 73	2.9	9.3	5.0	1.0	.2	.1													366	366	303	256
72/ 71	2.5	7.6	4.1	1.1	.1	.1													303	303	332	319
70/ 69	1.5	4.3	4.0	1.2	.3	.1	.1												226	226	295	308
68/ 67	1.3	4.6	3.8	1.2	.3	.1													221	221	203	226
66/ 65	.8	3.2	2.9	.8	.3	.2	.1												162	162	204	187
64/ 63	.4	1.9	1.0	.7	.2	.2													85	85	148	180
62/ 61	.2	1.0	.7	.5	.4	.1													55	55	120	124
60/ 59		.6	.3	.6	.2														32	32	52	86
58/ 57		.1	.5	.2															15	15	40	55
56/ 55		.3	.3																12	12	40	39
54/ 53			.3	.1															7	7	26	29
52/ 51				.1															2	2	10	25
50/ 49				.1	.1														2	2	5	15
48/ 47																					1	19
46/ 45																					2	10
44/ 43				.1															1	1	1	
42/ 41				.1															1	1	1	1
40/ 39																						1
38/ 37																					2	2
34/ 33																						1
30/ 29																						2
TOTAL	10.4	42.0	32.2	11.5	2.8	.9	.2												1972	1972	1972	1972

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15235107	172409	87.5	8.842	1971							
Dry Bulb	9953251	139727	70.9	5.177	1972			72.9	38.7	2.4		90
Wet Bulb	9239862	134532	68.2	5.606	1972			60.2	21.5			90
Dew Point	8894149	131829	66.9	6.424	1972		.1	54.6	15.7			90

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | SEP MONTH

 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
92/ 91								.1	.2									5	5		
90/ 89						.1	.3	.4	.1	.2		.1						19	19		
88/ 87					.1	1.1	1.6	1.1	.4									83	83		
86/ 85				.1	1.7	3.3	1.8	.7	.2	.2								156	156		
84/ 83				1.6	5.5	3.0	2.0	.9	.2	.1								261	261		
82/ 81		.1	1.4	3.9	3.3	2.4	1.3	.8	.2		.1							265	265		
80/ 79		.3	2.9	4.1	2.8	1.9	1.2	.5	.1	.1								271	271	12	1
78/ 77		1.9	3.1	2.8	2.4	1.4	.6	.3	.2	.1	.1							254	254	198	17
76/ 75	.2	2.1	2.7	2.3	1.6	1.1	.5	.2	.1	.1	.1							214	214	403	161
74/ 73	.3	1.7	1.7	1.8	1.0	.6	.3	.2	.1	.1								150	150	368	310
72/ 71	.1	.8	.9	1.2	.9	.8	.5	.2	.1									106	106	291	357
70/ 69	.3	.8	.8	.9	.6	.4	.2	.1										77	77	209	254
68/ 67	.2	.6	.4	.2	.5	.2	.2											43	43	174	227
66/ 65		.6	.6	.1	.4	.2	.1											36	36	103	180
64/ 63		.4	.1	.3	.1	.1												16	16	74	135
62/ 61		.2			.2		.1											10	10	59	95
60/ 59																				33	72
58/ 57			.2			.1	.1											5	5	27	45
56/ 55						.1												2	2	11	37
54/ 53																				3	24
52/ 51																					15
50/ 49																				2	12
48/ 47																				2	11
46/ 45																				2	10
44/ 43																					2
42/ 41																					2
38/ 37																					3
36/ 35																					3
TOTAL	.9	9.4	14.8	19.2	20.9	16.7	10.3	5.3	1.8	.6	.2	.1						1973	1973	1973	1973

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	10350475	140618	71.3	12.906	1973							
Dry Bulb	12208255	134789	68.5	5.719	1973			86.9	76.5	42.5		90
Wet Bulb	10074188	140626	71.3	5.087	1973			75.5	44.7	.1		90
Dew Point	9177734	133978	67.9	6.364	1973			60.5	22.3			90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-69 YEARS — SEP MONTH

 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
98/ 97												.1						1	1		
96/ 95								.1		.2	.1		.1					7	7		
94/ 93								.2	.4	.5	.6	.2						36	36		
92/ 91							.1	1.0	.8	.7	.3	.2						59	59		
90/ 89						.5	2.0	2.0	1.2	.6	.1							126	126		
88/ 87					.3	2.4	4.4	2.6	1.8	.7	.2	.1	.1					248	248		
86/ 85				.1	1.8	4.3	3.7	2.8	2.1	.5	.2		.1					306	306		
84/ 83			.1	1.5	2.9	3.7	2.8	1.5	1.0	.8								282	282		
82/ 81			.6	2.2	2.1	2.3	2.1	1.6	.8	.2								234	234	1	
80/ 79		.2	1.8	2.3	1.8	1.5	1.7	.9	.4	.2	.1							211	211	47	
78/ 77		.7	1.6	1.0	1.7	1.0	.7	.4	.2	.2	.2							150	150	253	15
76/ 75	.3	1.0	1.3	.5	.4	1.1	.8	.1	.4	.1								119	119	412	127
74/ 73	.2	.9	.7	.5	.4	.4	.6	.1	.1									75	75	383	270
72/ 71	.4	.2	.7	.3	.4	.1	.2	.2	.1									45	45	293	324
70/ 69		.4	.5		.2	.2	.1	.1										24	24	209	283
68/ 67		.5		.1		.1			.1									14	14	145	244
66/ 65		.3	.6	.1		.1		.1	.1									24	24	95	185
64/ 63			.1					.1										4	4	49	163
62/ 61																				38	118
60/ 59			.2															3	3	26	78
58/ 57																				7	54
56/ 55																				4	36
54/ 53																				2	21
52/ 51																				3	11
50/ 49																				1	14
48/ 47																					9
46/ 45																					4
44/ 43																					5
42/ 41																					1
40/ 39																					3
38/ 37																					1
36/ 35																					2
TOTAL	.8	4.1	8.1	8.5	12.0	17.7	19.1	13.6	9.3	4.5	1.6	.4	.2					1968	1968		1968

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	> 80 F	≥ 93 F	Total
Rel. Hum.	8086867	123027	62.5	14.189	1968							
Dry Bulb	13400003	161993	82.3	5.783	1968			88.6	84.8	64.3	2.0	90
Wet Bulb	10304627	142123	72.2	4.502	1968			79.7	50.1	.4		90
Dew Point	9044213	132859	67.5	6.173	1968			57.8	18.8			90

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | SEP MONTH

1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
96/ 95									.1	.1	.2	.2						9	9		
94/ 93									.3	.7	.3	.1	.1					27	27		
92/ 91							.1	.6	.3	.4	.3	.1						35	35		
90/ 89						.2	.6	.7	.9	.7	.2							62	62		
88/ 87				.1	.5	1.8	2.2	1.8	1.8	.3	.2							168	168		
86/ 85				.2	1.8	4.6	3.4	2.1	.8	.3	.1							259	259		
84/ 83				1.0	4.2	3.9	2.1	2.2	.9	.6	.1	.1						294	294		
82/ 81		.1	.6	3.2	3.3	2.8	2.3	2.0	.7	.2	.1							298	298	1	
80/ 79		.4	2.3	3.1	1.7	1.6	2.0	.9	.4	.2	.2							251	251	28	2
78/ 77	.1	1.1	2.1	1.4	2.1	.9	.9	.4	.3	.2								183	183	216	21
76/ 75	.5	1.5	1.6	1.2	.8	1.0	.7	.4	.2	.1								155	155	437	125
74/ 73	.2	1.2	1.3	.4	.3	.4	.6	.2	.1									89	89	366	295
72/ 71	.3	.9	1.0	.7	.3	.2	.1		.1									70	70	310	310
70/ 69	.1	.4	.4	.3		.2	.1		.2									31	31	227	292
68/ 67	.1	.4	.1	.1			.1	.1	.1									14	14	161	236
66/ 65			.5			.2												13	13	100	199
64/ 63		.3	.1															7	7	48	128
62/ 61																				40	125
60/ 59			.1	.1														3	3	17	81
58/ 57																				6	54
56/ 55																				6	31
54/ 53																				5	23
52/ 51																					14
50/ 49																					9
48/ 47																					8
46/ 45																					8
44/ 43																					2
42/ 41																					1
40/ 39																					3
38/ 37																					1
TOTAL	1.2	6.1	10.0	11.5	14.8	17.6	15.1	11.3	7.0	3.5	1.4	.4	.1					1968	1968		1968
																				1968	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.
Rel. Hum.	8820730	128520	65.3	14.747	1968
Dry Bulb	13033185	159787	81.2	5.508	1968
Wet Bulb	10243085	141717	72.0	4.392	1968
Dew Point	9093990	133250	67.7	6.044	1968

Mean No. of Hours with Temperature

	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb			88.9	83.7	59.2	1.6	90
Wet Bulb			79.8	47.9	.4		90
Dew Point			58.6	20.3			90

FORM JUL 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) SEP (MONTH)

 1800-2000 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 91										.1								1	1		
90/ 89						.1	.1	.1		.1								5	5		
88/ 87						.1	.3	.1	.1									10	10		
86/ 85				.1	.4	.4	.2	.1	.1									23	23		
84/ 83			.1	1.0	1.3	.7	.3	.1	.1									68	68		
82/ 81			1.1	3.5	2.5	1.0	.4	.1	.1									167	167		
80/ 79		.6	6.3	6.6	2.6	1.7	.4	.1	.1	.1								357	357	8	
78/ 77		2.2	7.2	4.4	2.5	1.8	.4	.2										363	363	101	16
76/ 75	.5	4.6	5.5	4.7	1.9	1.1	.3	.2		.1								367	367	354	141
74/ 73	.5	2.3	3.0	2.5	2.0	.7	.2	.1	.1									220	220	392	358
72/ 71	.3	2.2	1.8	1.2	1.4	.5	.2											148	148	342	332
70/ 69	.2	1.0	1.2	1.0	.4	.5		.1										85	85	258	309
68/ 67	.3	.8	1.0	.7	.6	.3	.1											[illegible]	73	165	200
66/ 65	.1	.1	.5	.2	.3													[illegible]	23	130	182
64/ 63	.1	.3	.2	.1	.1	.2	.1											[illegible]	19	80	118
62/ 61		.1				.1												2	2	54	104
60/ 59			.1	.1	.1	.1												3	5	24	62
58/ 57					.1													1	1	13	34
56/ 55				.1														1	1	8	32
54/ 53																				4	17
52/ 51																				3	13
50/ 49																				2	5
48/ 47																					6
46/ 45																					4
44/ 43																					3
42/ 41																					2
TOTAL	2.0	14.2	27.9	26.2	16.2	9.1	2.9	.9	.4	.2								1938	1938	1938	1938

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11940603	150541	77.7	11.288	1938							
Dry Bulb	11298641	147717	76.2	4.530	1938			87.6	73.4	20.5		90
Wet Bulb	9800643	137533	71.0	4.568	1938			75.2	39.7	.1		90
Dew Point	9145814	132680	68.5	5.668	1938			62.0	23.9			90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | SEP MONTH

PAGE 1 | 2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83								.1										2	2		
82/ 81		.1	.4	.6	.1	.1	.1											25	25		
80/ 79		1.1	3.0	2.3	.7	.2	.1											142	142	1	
78/ 77		4.7	7.2	2.7	.7	.1												298	298	38	9
76/ 75	.5	9.2	7.5	2.3	.5		.1											389	389	255	139
74/ 73	1.4	6.7	6.5	3.3	.9	.2	.1											367	367	394	331
72/ 71	1.2	4.2	4.3	2.1	.5	.1												241	241	348	348
70/ 69	.8	2.8	3.6	2.2	.6	.2												201	201	270	288
68/ 67	.3	2.0	2.2	.8	.5	.1												111	111	197	212
66/ 65	.2	.5	1.0	1.3	.4	.2												82	82	175	188
64/ 63	.2	.6	.3	.7	.3													41	41	95	141
62/ 61		.4	.3	.2	.2	.1												21	21	63	88
60/ 59			.2	.2	.2													11	11	45	60
58/ 57																				26	45
56/ 55				.1														1	1	15	30
54/ 53				.1	.1													2	2	6	20
52/ 51				.1														2	2	3	19
50/ 49				.1														1	1	1	6
48/ 47																				1	3
46/ 45																				4	4
44/ 43																					1
42/ 41																					1
40/ 39																					3
36/ 35																					1
TOTAL	4.6	32.2	37.5	18.8	5.5	1.1	.2	.1										1937	1937	1937	1937

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum	14032432	163968	84.7	8.874	1937							
Dry Bulb	10426934	141856	73.2	4.438	1937			82.5	56.8	3.5		90
Wet Bulb	9503487	135343	69.9	4.913	1937			69.8	32.0			90
Dew Point	9078736	132140	68.2	5.763	1937			61.7	22.3			90

USAFETAC FORM 0-26-5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

0000-0200 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
78/ 77		.7	.1															17	17		
76/ 75	.0	1.5	1.0	.1														54	54	20	13
74/ 73	.6	2.8	.8	.1														88	88	70	46
72/ 71	1.0	4.1	.5	.2		.1												123	123	99	91
70/ 69	1.1	5.1	2.3	.3		.1	.0											183	183	138	126
68/ 67	1.5	5.3	2.3	.5	.0	.1												198	198	160	168
66/ 65	.8	5.3	2.7	.6	.0		.0											194	194	175	139
64/ 63	.7	4.6	2.8	.6	.3		.1											185	185	171	170
62/ 61	.6	6.0	2.3	1.2	.3	.1												215	215	167	138
60/ 59	.7	3.5	2.3	.7	.1	.1		.0										152	152	206	171
58/ 57	.3	4.1	1.6	.8	.2		.0	.0										145	145	135	144
56/ 55	.2	2.8	1.2	.4	.0	.1	.0											101	101	165	168
54/ 53	.2	1.0	1.4	.9		.0												74	74	105	109
52/ 51		1.3	1.4	.5	.2													70	70	62	90
50/ 49		1.7	1.5	.4	.1	.0												77	77	78	71
48/ 47	.0	1.4	.6	.2	.2													52	52	92	74
46/ 45		1.5	.4	.3	.0													46	46	64	76
44/ 43		.9	.2	.1														26	26	44	67
42/ 41		.7	.3	.1														24	24	39	58
40/ 39		.0	.2															5	5	27	36
38/ 37		.0	.1															4	4	11	21
36/ 35		.1	.0															3	3	5	23
34/ 33																				3	10
32/ 31																					16
30/ 29																					8
28/ 27																					2
26/ 25																					1
TOTAL	7.9	54.8	26.2	8.3	1.7	.8	.3	.1											2036		2036
																		2036		2036	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15912968	176516	86.7	10.146	2036							
Dry Bulb	7933255	125983	61.9	8.226	2036			30.3	7.3			93
Wet Bulb	7366411	121163	59.5	8.754	2036			22.2	4.1			93
Dew Point	6989834	117584	57.8	9.891	2036		1.2	20.3	2.7			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D B. W.B.	Dry Bulb	Wet Bulb	Dew Point
78/ 77		.1	.2															6	6		
76/ 75		1.1	.1															24	24	7	5
74/ 73	.9	2.0	.8	.0														76	76	53	42
72/ 71	1.1	2.8	.8		.0													98	98	69	67
70/ 69	1.4	3.4	1.1	.2	.0		.0											135	135	120	103
68/ 67	1.4	5.7	1.2	.1			.0											173	173	141	129
66/ 65	2.3	3.9	1.6	.0	.1													162	162	181	168
64/ 63	1.2	6.3	1.9	.8	.2	.1												216	216	130	128
62/ 61	1.1	5.8	1.9	.9	.3	.1												207	207	193	163
60/ 59	1.1	4.5	2.3	.4	.1	.0												173	173	177	154
58/ 57	.6	3.6	1.3	.5	.1													126	126	149	158
56/ 55	.5	3.9	2.3	.3	.1	.0												146	146	160	136
54/ 53	.4	2.3	1.6	.8	.0	.1												107	107	130	142
52/ 51	.3	1.2	.8	.5	.1	.0												60	60	102	103
50/ 49	.1	1.9	1.9	.4	.1	.0												91	91	60	84
48/ 47	.2	1.3	1.0	.3														58	58	92	71
46/ 45	.2	2.0	.7	.1	.1													65	65	79	74
44/ 43	.2	1.1	.6	.3	.1													48	48	71	82
42/ 41	.1	.3	.2	.1														26	26	43	66
40/ 39	.0	.6	.4	.1														26	26	33	49
38/ 37		.2	.0															6	6	25	36
36/ 35		.2																5	5	11	20
34/ 33		.0																1	1	9	20
32/ 31		.0																1	1		12
30/ 29																				1	16
28/ 27																					6
26/ 25																					2
TOTAL	13.2	55.1	23.0	6.2	1.6	.5	.1												2036		2036
																		2036		2036	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15971368	179230	88.0	9.755	2036							
Dry Bulb	7502462	122350	60.1	8.587	2036		.0	23.4	4.8			93
Wet Bulb	7025631	118159	58.0	9.094	2036		.0	17.8	2.7			93
Dew Point	6697070	114914	56.4	10.187	2036		1.6	15.8	2.1			93

FORM 70t 64 0-26-5 (OL) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
80/ 79			.1	.0														4	4		
78/ 77		.3	.5	.1														20	20		
76/ 75		.8	.6	.0														30	30	16	6
74/ 73	.1	2.7	.8															74	74	41	31
72/ 71	.7	3.0	1.1	.1	.0													103	103	88	82
70/ 69	1.0	4.5	1.7	.1														150	150	121	101
68/ 67	1.5	4.3	2.1	.3	.0													168	168	140	146
66/ 65	1.6	4.0	2.0	.3	.1	.1	.1											169	169	170	136
64/ 63	.8	6.0	2.3	.5	.3	.0												202	202	149	136
62/ 61	1.1	4.7	2.3	.9	.5													192	192	187	171
60/ 59	.6	4.9	2.1	.8	.1	.1	.0											178	178	155	148
58/ 57	.4	3.1	2.2	.6	.3	.1												138	138	151	143
56/ 55	.5	2.5	2.2	.5	.3	.1												125	125	152	147
54/ 53	.4	2.3	1.9	.9	.1													115	115	134	111
52/ 51	.4	1.6	1.3	.3														75	75	101	111
50/ 49	.0	1.7	1.1	.3	.2													68	68	95	109
48/ 47	.0	1.5	.8	.5	.2													62	62	81	79
46/ 45		1.6	.9	.3														58	58	64	70
44/ 43	.2	1.0	.6	.2	.1													43	43	63	76
42/ 41	.0	.6	.4	.2														26	26	45	71
40/ 39		.4	.2	.1														15	15	33	41
38/ 37		.5	.1	.1														14	14	24	35
36/ 35		.1																3	3	13	29
34/ 33		.1	.0															4	4	8	20
32/ 31		.0																1	1	4	14
30/ 29																				2	12
28/ 27																					6
26/ 25																					3
24/ 23																					1
22/ 21																					1
20/ 19																					1
TOTAL	9.5	52.3	27.3	7.7	2.5	.5	.2												2037		2037
																		2037		2037	

Element (X)	Σ_i	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature					
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	15452097	176219	86.5	10.097	2037							
Dry Bulb	7604668	123180	60.5	8.748	2037		.0	25.1	5.8			93
Wet Bulb	7053582	118394	58.1	9.200	2037		.3	18.5	2.6			93
Dew Point	6679519	114733	56.3	10.330	2037		1.7	16.7	1.7			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PAGE 1 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 91								.0										1	1		
88/ 87						.0	.0											2	2		
86/ 85				.0	.0	.2	.3	.1	.1									19	19		
84/ 83			.0	.1	.2	.7	.4	.4				.0						39	39		
82/ 81			.2	1.0	1.2	.9	.7	.0	.0									84	84		
80/ 79		.0	.6	1.3	1.6	.8	.8	.6	.1	.0								124	124	4	1
78/ 77		.2	1.1	1.5	1.8	.8	1.1	.4	.1	.0								144	144	20	5
76/ 75		.6	1.9	1.6	1.4	1.2	.8	.6	.1		.0							171	171	58	24
74/ 73	.0	1.3	1.3	1.7	2.1	1.2	1.1	.6	.2	.0	.0							200	200	122	48
72/ 71	.1	1.5	2.1	2.2	1.3	1.2	.9	.3	.1									199	199	153	97
70/ 69	.2	1.5	2.6	1.7	1.1	1.3	1.0	.5	.4									210	210	200	155
68/ 67	.5	1.0	2.2	1.7	1.5	1.5	.6	.5	.0									195	195	194	164
66/ 65	.1	.9	1.7	1.3	1.3	.9	.8	.2		.0								148	148	213	165
64/ 63	.3	.7	1.1	1.2	1.2	.8	.3	.3	.0									124	124	178	171
62/ 61	.1	.8	.8	1.3	.9	.5	.5	.2										108	108	156	139
60/ 59	.2	.6	.4	1.3	.9	.8	.3	.2										99	99	171	162
58/ 57		.3	.3	.9	.5	.5	.3	.1										60	60	135	116
56/ 55	.0	.1	.4	.4	.5	.1	.1											38	38	110	113
54/ 53		.1	.1	.5	.5	.2	.1											32	32	99	99
52/ 51		.0	.1	.2	.1	.1	.0											15	15	67	119
50/ 49		.0	.2	.1	.2	.0												13	13	52	87
48/ 47			.0	.0	.0	.0												4	4	45	71
46/ 45				.0	.1													3	3	26	69
44/ 43			.0	.0	.1													4	4	13	48
42/ 41			.0															1	1	12	39
40/ 39																				5	31
38/ 37																				3	23
36/ 35																				1	22
34/ 33																					12
32/ 31																					12
30/ 29																					14
28/ 27																					7
26/ 25																					3
24/ 23																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64
USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	1.7	10.2	17.4	20.4	18.6	14.2	10.5	5.4	1.4	.2	.1	.0						2037	2037	2037	2037

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	10146526	140284	68.9	15.441	2037							
Dry Bulb	10017547	141969	69.7	7.772	2037			63.4	35.8	9.7		93
Wet Bulb	8180402	128078	62.9	7.910	2037			34.3	9.3			93
Dew Point	7160513	118959	58.4	10.238	2037		1.7	22.6	3.6			93

USAFETAC FORM 0-26-5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) OCT (MONTH)

PAGE 1 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
96/ 95										.0								1	1		
94/ 93									.1	.1								5	5		
92/ 91								.0	.0		.1							5	5		
90/ 89						.1	.0	.3		.1	.0							14	14		
88/ 87					.0	.0	.3	.2	.2	.4		.1						29	29		
86/ 85				.0	.3	.3	.5	.5	.7	.6	.1							62	62		
84/ 83			.1	.3	.8	1.8	1.4	1.3	.4	.6	.1	.1						142	142		
82/ 81			.3	.6	.9	2.3	2.1	2.2	1.4	.2	.2	.1	.0					211	211		
80/ 79		.0	.4	1.0	1.9	2.5	2.0	1.8	1.4	.3	.4	.2	.1					246	246	8	2
78/ 77		.3	.5	.6	1.6	1.3	2.3	2.0	.9	.2	.2	.0						202	202	32	8
76/ 75	.1	.2	.9	1.4	1.6	1.5	2.1	1.4	1.2	.5	.2	.1						231	231	86	22
74/ 73	.0	.7	1.1	1.7	1.2	.8	1.6	1.4	.9	.9	.1							214	214	115	45
72/ 71	.1	.2	.7	1.0	1.0	1.2	1.1	1.2	.8	.5								160	160	210	98
70/ 69	.1	.9	.6	.7	.5	.9	1.3	.8	.7	.3								140	140	226	114
68/ 67	.0	.3	.3	.5	.7	.5	.6	.8	.2	.1	.0							84	84	253	178
66/ 65	.0	.3	.6	.5	.4	.8	.7	.8	.6	.1								103	103	208	158
64/ 63	.1	.6	.3	.2	.4	.2	.7	.6	.1									68	68	171	157
62/ 61	.2	.1	.4	.2	.3	.2	.1	.5	.2									50	50	171	193
60/ 59	.1	.2	.1	.4	.1	.1	.2	.2	.0									32	32	132	146
58/ 57		.2		.2		.0	.2	.1										18	18	122	154
56/ 55		.1		.0	.1	.1	.2											12	12	103	128
54/ 53		.0		.0		.0	.0											4	4	72	93
52/ 51																				50	93
50/ 49																				34	70
48/ 47																				17	77
46/ 45				.1														2	2	17	45
44/ 43					.0													1	1	5	56
42/ 41																				1	46
40/ 39																				2	39
38/ 37																				1	25
36/ 35																					31
34/ 33																					20
32/ 31																					11
30/ 29																					13

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
28/ 27																						9
26/ 25																						3
22/ 21																						2
TOTAL	.9	4.5	6.5	9.8	11.8	14.9	17.5	16.2	10.1	5.2	1.6	.7	.1							2036		2036
																			2036		2036	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7399743	117869	57.9	16.824	2036							
Dry Bulb	11532791	152543	74.9	7.143	2036			79.8	62.2	27.8	.3	93
Wet Bulb	8602780	131534	64.6	7.188	2036			42.5	11.0	.2		93
Dew Point	7082513	118181	58.0	10.459	2036		1.7	21.3	3.5			93

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
94/ 93									.0		.0	.1						4	4		
92/ 91								.0		.0	.0	.0						4	4		
90/ 89							.1	.0	.0	.0	.1							8	8		
88/ 87					.0	.1	.2	.1	.1	.2								20	20		
86/ 85					.0	.6	.5	.5	.3	.2	.1							47	47		
84/ 83				.2	.3	.8	.8	.7	.8	.4	.1	.1						89	89		
82/ 81			.2	.8	1.3	1.2	1.4	1.3	1.4	.5	.1	.2	.0					174	174		
80/ 79		.0	.7	1.1	2.0	2.5	1.9	1.6	.7	.3	.1	.1						224	224	4	
78/ 77		.2	.9	1.8	2.4	1.9	1.7	1.0	.5	.8	.3							234	234	22	5
76/ 75		.1	.9	1.3	2.3	2.3	1.8	.9	1.0	.4	.2	.0						228	228	68	19
74/ 73	.1	1.1	1.0	1.4	2.2	1.0	2.2	.6	1.0	.6	.0							243	243	133	47
72/ 71	.2	1.0	1.0	1.4	1.8	1.2	1.6	1.3	.9	.4	.0							222	222	184	90
70/ 69		.8	.4	.7	1.1	1.3	.7	.9	.8	.1								139	139	246	155
68/ 67	.1	.5	.4	.6	.7	.9	.9	.8	.6	.1	.1							118	118	261	157
66/ 65		.3	.9	.5	.4	.5	.0	.8	.5	.1								98	98	222	169
64/ 63	.1	.6	.3	.3	.1	.3	.6	.3	.3	.0								70	70	162	169
62/ 61	.2	.2	.2	.4	.2	.3	.4	.1	.0	.1								47	47	175	189
60/ 59	.0	.4	.1	.4		.2	.2	.3	.0									36	36	152	148
58/ 57		.1			.0	.0	.2	.0										10	10	115	158
56/ 55		.1	.1		.1	.1	.0	.1										14	14	99	114
54/ 53		.0																1	1	74	112
52/ 51							.0											1	1	47	71
50/ 49				.1														2	2	26	47
48/ 47				.0														1	1	23	81
46/ 45																				12	63
44/ 43																				5	53
42/ 41																				4	59
40/ 39																					31
38/ 37																					28
36/ 35																					21
34/ 33																					15
32/ 31																					9
30/ 29																					10
28/ 27																					5

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Ref. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
26/ 25																						1
24/ 23																						5
20/ 19																						2
18/ 17																						1
TOTAL	.8	5.7	7.9	11.3	13.1	15.5	16.1	11.8	9.2	4.5	1.4	.6	.0						2034	2034	2034	2034

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7902566	121880	59.9	17.170	2034							
Dry Bulb	11283434	150880	74.2	6.702	2034			80.2	58.3	21.4	.2	93
Wet Bulb	8562982	131216	64.5	6.943	2034			42.0	10.4			93
Dew Point	7130847	118603	58.3	10.286	2034		1.5	21.6	3.2			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

PAGE 1 | 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL			
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
88/ 87								.0										1	1		
86/ 85						.0												1	1		
84/ 83				.0	.1			.0										4	4		
82/ 81			.1	.2		.0	.2											12	12		
80/ 79		.2	.5	.7	.1	.2	.1											40	40		
78/ 77		.6	1.1	.6	.2	.3	.2	.0										65	65	9	5
76/ 75	.1	1.3	3.2	2.4	1.4	.0	.3	.1	.0									180	180	46	24
74/ 73	.0	2.2	3.2	1.7	1.0	.5	.1	.1	.0									185	185	68	45
72/ 71	.2	3.1	3.7	3.0	1.4	.5	.1											246	246	160	86
70/ 69	.3	3.0	4.0	3.4	1.3	.7	.3	.0	.1									268	268	217	179
68/ 67	.2	1.5	3.6	2.9	1.4	.6	.2	.3										222	222	218	181
66/ 65	.0	1.7	3.1	3.4	1.6	.8	.0	.0	.0									220	220	198	173
64/ 63	.3	1.1	1.6	1.6	1.4	.6	.2	.1										142	142	223	173
62/ 61	.2	.8	1.6	1.2	1.1	.6	.1											113	113	181	182
60/ 59	.0	.7	1.4	1.3	1.0	.1	.1		.1									97	97	156	161
58/ 57	.1	.1	1.2	1.2	.6	.1	.1	.1										75	75	127	161
56/ 55	.1	.1	.7	1.1	.6	.1												56	56	109	108
54/ 53		.3	.7	.6	.1	.2	.1											42	42	89	92
52/ 51	.1		.5	.5	.1	.0												27	27	79	94
50/ 49		.0	.4	.3	.0	.0												18	18	59	93
48/ 47		.1	.3	.0	.1													12	12	35	61
46/ 45		.0	.2	.1														8	8	28	64
44/ 43				.0														1	1	21	39
42/ 41																				7	43
40/ 39																				5	28
38/ 37																					12
36/ 35																					8
34/ 33																					9
32/ 31																					7
30/ 29																					1
28/ 27																					4
26/ 25																					2
TOTAL	1.9	17.1	31.2	26.5	13.7	5.8	2.4	1.0	.3									2035		2035	
																			2035		2035

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	12202790	155456	76.4	12.686	2035							
Dry Bulb	9348759	137203	67.4	6.952	2035			55.9	22.3	1.8		93
Wet Bulb	8086566	127384	62.6	7.512	2035			32.8	5.6			93
Dew Point	7363828	120954	59.4	9.268	2035		.6	23.8	3.4			93

USAFETAC FORM JUL 64 0-26-5 (OL1) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | OCT MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
80/ 79			.0	.1	.0													4	4		
78/ 77		.8	.8	.1														37	37	1	
76/ 75	.2	1.5	1.1	.2	.0													63	63	33	18
74/ 73	.4	3.2	2.0	.3	.2													124	124	61	47
72/ 71	.3	4.7	2.7	.8	.2													175	175	133	91
70/ 69	.8	5.3	3.9	1.5	.2	.0	.0	.0										234	234	161	159
68/ 67	.7	4.6	4.5	1.3	.2	.0	.0	.1										236	236	183	155
66/ 65	.5	4.1	3.3	1.5	.3	.1	.1	.0										204	204	200	174
64/ 63	.3	3.2	3.7	1.6	.8	.1	.0	.0										200	200	192	174
62/ 61	.4	2.9	2.2	1.7	.5													156	156	168	170
60/ 59	.1	2.7	1.9	1.0	.3	.0												124	124	179	149
58/ 57	.2	1.6	1.8	1.0	.2	.2												104	104	147	168
56/ 55	.1	1.4	1.9	.9	.2	.1		.0										95	95	122	122
54/ 53	.0	.7	1.9	.7	.4	.0	.1											78	78	96	87
52/ 51		.9	1.5	.6	.0	.1												66	66	82	101
50/ 49		1.1	.7	.1	.1													40	40	82	79
48/ 47		.7	.6	.1	.1													32	32	70	88
46/ 45		1.0	.5	.0														31	31	43	65
44/ 43		.4	.3	.3														20	20	36	58
42/ 41		.1	.2															7	7	20	46
40/ 39		.1	.1															6	6	18	26
38/ 37																				9	19
36/ 35																					15
34/ 33																					11
32/ 31																					9
30/ 29																					1
28/ 27																					2
24/ 23																					1
22/ 21																					1
TOTAL	4.1	41.0	35.3	13.9	4.1	.9	.3	.3											2036		2036
																		2036		2036	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14498411	170473	83.7	10.511	2036							
Dry Bulb	8417522	129952	63.8	7.776	2036			39.9	10.4			93
Wet Bulb	7661349	123747	60.8	8.302	2036			26.1	4.3			93
Dew Point	7192982	119448	58.7	9.340	2036		.6	21.5	3.0			93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
74/ 73		.1	.2															5	5		
72/ 71		.8	.2	.1														20	20	4	2
70/ 69	.3	1.1	.3	.1														36	36	25	16
68/ 67	.7	2.0	1.4	.4														89	89	50	46
66/ 65	.8	3.3	1.2	.4														112	112	77	54
64/ 63	1.0	2.7	1.0	.5														102	102	111	99
62/ 61	.8	3.5	1.3	.3	.1													116	116	108	89
60/ 59	1.0	2.8	1.5	.6	.1													118	118	116	111
58/ 57	1.0	4.0	1.5	.4	.2	.2												143	143	107	110
56/ 55	.8	3.2	1.3	.8	.5	.1	.1											133	133	140	121
54/ 53	.9	3.3	1.6	.8	.2	.2	.1											136	136	116	123
52/ 51	.5	3.1	1.4	.9	.2	.1												122	122	109	97
50/ 49	.4	2.9	2.4	.8	.4	.1												138	138	125	106
48/ 47	.4	2.8	1.7	1.1	.6	.3												134	134	114	103
46/ 45	.5	3.6	1.0	1.1	.5	.1												132	132	144	105
44/ 43	.1	1.9	1.1	.5	.2													73	73	117	96
42/ 41	.3	2.8	1.6	.7	.1													105	105	99	106
40/ 39	.2	2.2	1.7	.7		.1												96	96	113	109
38/ 37		1.0	1.3	.5	.1													55	55	88	82
36/ 35	.1	1.0	.9	.2	.1													43	43	75	61
34/ 33	.1	.8	.8	.1	.1													34	34	47	82
32/ 31		.5	.4	.1														19	19	45	53
30/ 29		.2	.2															6	6	27	54
28/ 27	.1	.2																5	5	12	51
26/ 25		.1	.1															3	3	5	38
24/ 23			.2															3	3	3	30
22/ 21																					13
20/ 19																				3	7
18/ 17																					3
16/ 15																					3
14/ 13																					2
12/ 11																					4
10/ 9																					3
6/ 5																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

 0000-0200 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	9.	49.8	25.7	10.9	2.9	1.0	.1											1980	1980	1980	1980

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	14026538	164644	83.2	13.027	1980							
Dry Bulb	5646363	103911	52.5	9.876	1980		1.6	6.8	.2			90
Wet Bulb	5153931	98909	50.0	10.375	1980		4.3	3.6				90
Dew Point	4722021	93629	47.3	12.200	1980		11.9	2.9				90

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
74/ 73			.1															2	2		
72/ 71		.4	.2															11	11		
70/ 69	.3	.7	.5	.1														28	28	19	15
68/ 67	.4	2.0	.7	.2														63	63	40	25
66/ 65	.7	2.4	.7	.2														77	77	54	53
64/ 63	1.7	2.2	.7	.1	.1													93	93	102	92
62/ 61	1.5	4.0	.9	.3														132	132	96	78
60/ 59	1.0	3.2	1.1	.2														109	109	109	106
58/ 57	1.3	3.1	1.2	.2														113	113	111	98
56/ 55	1.6	3.6	1.1	.1	.1													128	128	121	129
54/ 53	1.1	3.1	1.5	.7	.1		.1											128	128	117	108
52/ 51	.8	2.5	1.6	1.0	.1	.1												117	117	100	90
50/ 49	1.1	3.5	2.2	.5	.2	.1	.1											151	151	120	106
48/ 47	.8	2.6	2.0	.7	.4													128	128	124	107
46/ 45	.6	3.4	1.4	.9	.2	.1												129	129	138	103
44/ 43	.3	3.0	1.4	.9	.3	.1												117	117	118	86
42/ 41	.2	2.9	1.3	.8	.3													109	109	109	128
40/ 39	.2	2.1	1.1	.2	.1													72	72	110	111
38/ 37	.4	2.1	1.4	.5														87	87	87	72
36/ 35		2.0	1.3	.2														69	69	97	78
34/ 33	.3	.7	.5	.1														30	30	68	81
32/ 31		1.5	.7	.2														46	47	49	76
30/ 29		.5	.4	.1														19	19	46	61
28/ 27		.2	.1															4	4	16	51
26/ 25	.1	.2	.1															6	6	9	31
24/ 23		.3	.1															8	8	8	35
22/ 21		.1																1	1	7	22
20/ 19		.1																1	1	2	10
18/ 17																				1	10
16/ 15																					4
14/ 13																					1
12/ 11																					7
10/ 9																					2
8/ 7																					2

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 90 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

PAGE 2 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	14.2	52.1	24.2	7.6	1.6	.3	.1											1978	1979	1978	1978

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14526505	167767	84.8	12.259	1978							
Dry Bulb	9289733	100295	50.7	10.225	1979		3.9	4.7	≥1			90
Wet Bulb	4886364	96020	48.5	10.677	1978		6.3	2.7				90
Dew Point	4508769	91209	46.1	12.379	1978		14.2	1.8				90

USAFETAC FORM 0-26-5 (OL1) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-60 (YEARS) NOV (MONTH)

PAGE 1 0600-0900 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
74/ 73		.1	.2															5	5		
72/ 71		.2	.2															8	8	2	1
70/ 69	.2	.3	.7	.1														28	28	17	15
68/ 67	.4	1.7	.6	.4														60	60	34	16
66/ 65	1.0	2.5	.9	.2														87	87	67	67
64/ 63	1.4	2.5	.6	.1														92	92	96	82
62/ 61	1.6	3.4	.7	.1														113	113	100	90
60/ 59	.9	3.4	1.4	.2														116	116	105	93
58/ 57	1.2	3.5	1.0	.4														120	120	111	107
56/ 55	1.0	3.1	1.3	.5	.1													119	119	108	111
54/ 53	.7	2.9	1.7	.5	.3													121	121	103	98
52/ 51	.9	2.6	2.0	.7	.1	.1												125	125	112	84
50/ 49	.8	3.3	2.6	.9	.2	.1												157	157	114	103
48/ 47	.8	2.7	2.0	.6	.4	.1												128	128	135	111
46/ 45	.5	3.1	1.2	.7	.1	.1												110	110	135	113
44/ 43	.5	2.0	2.5	.8	.2	.1												118	118	111	100
42/ 41	.4	2.6	1.8	.6	.1													107	107	107	94
40/ 39	.3	2.1	1.5	.6	.2													92	92	123	117
38/ 37	.3	1.7	1.3	.3	.1													72	72	90	82
36/ 35	.1	1.8	1.2															61	61	76	97
34/ 33	.1	1.7	1.3															61	61	71	66
32/ 31		1.0	.4															26	27	70	79
30/ 29	.1	.7	.4	.1														23	23	40	54
28/ 27	.1	.3	.2	.1														12	12	19	69
26/ 25	.1	.1	.2															6	6	11	40
24/ 23		.2	.1															6	6	7	29
22/ 21																				8	20
20/ 19		.1																1	1	1	8
18/ 17		.1	.1															2	2	1	13
16/ 15																				2	7
14/ 13																					2
12/ 11																					2
10/ 9																					3
8/ 7																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
6/ 5																					1
4/ 3																					1
TOTAL	13.2	49.7	27.7	7.6	1.6	.3												1976	1977	1976	1976

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14327969	166547	84.3	12.129	1976							
Dry Bulb	5265514	99942	50.6	10.388	1977		3.5	4.6	.2			90
Wet Bulb	4847349	95509	48.3	10.819	1976		7.2	2.4				90
Dew Point	4459069	90567	45.8	12.489	1976		15.0	1.5				90

USAFETAC FORM 0-26-5 (OL1) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
82/ 81							.1	.1										2	2		
80/ 79					.2	.2	.3		.1									13	13		
78/ 77			.1	.2	.5	.4	.2											25	25		
76/ 75			.4	.6	.9	.7	.2	.1	.1									55	55		
74/ 73		.3	.5	1.0	1.1	.4	.4	.2										75	75	6	
72/ 71	.1	.3	1.0	1.4	1.1	.6	.5	.1										103	103	22	12
70/ 69	.2	1.2	1.4	1.3	.8	.9	.5	.3	.1									133	133	59	19
68/ 67	.2	2.4	1.9	1.0	1.1	.6	.4	.4	.2									158	158	114	63
66/ 65	.3	1.1	1.7	.9	.9	1.0	.9	.3	.3									143	143	147	100
64/ 63	.2	1.5	1.4	1.0	.8	1.0	.6	.4	.1									136	136	119	100
62/ 61	.1	1.6	1.3	1.3	1.2	1.1	.7	.2	.1									149	149	121	135
60/ 59	.3	.8	.9	2.0	.9	1.4	1.0	.3										151	151	136	112
58/ 57	.1	.8	1.4	1.1	1.2	1.2	.5	.4										132	132	111	95
56/ 55	.2	1.1	1.5	1.6	1.2	.9	.6	.1										139	139	129	92
54/ 53	.3	.5	1.6	1.0	1.3	1.1	.6	.1										126	126	127	104
52/ 51	.1	.4	1.3	1.2	.9	1.2	.3	.1										105	105	139	107
50/ 49		.3	1.1	.7	1.0	.8	.1											82	82	136	76
48/ 47		.2	.5	1.0	1.2	.8	.1											73	73	128	100
46/ 45		.2	.5	1.1	1.0	.3												60	60	101	118
44/ 43	.1	.3	.3	.7	.5	.2												40	40	93	89
42/ 41		.1	.2	1.0	.4													32	32	88	75
40/ 39			.3	.4	.3													18	18	70	82
38/ 37			.1	.3														8	8	47	87
36/ 35			.3	.3	.1													12	12	40	59
34/ 33		.1		.1														3	3	19	56
32/ 31			.1	.1														2	2	15	63
30/ 29		.1	.1															2	2	4	59
28/ 27																				4	49
26/ 25																				2	46
24/ 23																					39
22/ 21			.1															1	1		11
20/ 19			.1															1	1		14
18/ 17			.1															1	1	1	8
16/ 15																				1	4

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26 5 (OL) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

PAGE 2 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
14/ 13																				1	
10/ 9																					2
8/ 7																					1
2/ 1																					1
-4/ -5																					1
-6/ -7																					1
TOTAL	2.0	13.2	19.7	21.2	18.3	14.3	7.8	2.7	.8									1980	1980	1980	1980

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9378823	131865	66.6	17.366	1980							
Dry Bulb	7300844	118724	60.0	9.589	1980		.3	25.6	7.7	.3		90
Wet Bulb	5927506	106542	53.8	9.916	1980		1.3	9.1	.3			90
Dew Point	4914999	95163	48.1	13.132	1980	.1	13.6	4.3				90

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13024 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-69 YEARS — NOV MONTH

1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85								.1	.1	.1								5	5		
84/ 83						.1		.3	.3									13	13		
82/ 81				.1		.1	.5	.5	.2	.2								29	29		
80/ 79				.5	.4	1.1	1.1	.7	.2	.1	.1							82	82		
78/ 77			.3	.3	1.2	1.0	1.2	1.0	.9	.2								116	116		
76/ 75		.1	.2	.4	1.5	1.8	1.3	.8	.8	.2		.1						137	137	1	
74/ 73			.4	1.0	1.8	1.8	1.7	1.5	.4	.2	.2							175	175	17	2
72/ 71		.2	.8	1.3	1.5	1.5	1.0	1.1	1.3	.6	.2							183	183	29	15
70/ 69	.1	.6	.7	.6	1.2	1.5	.8	1.2	1.3	.5								166	166	100	17
68/ 67	.3	.5	.7	.6	1.3	1.1	1.0	1.4	1.3	.5								169	169	145	58
66/ 65	.1	.4	.4	.6	1.2	1.2	1.2	1.3	.8	.2								146	146	163	80
64/ 63		.4	.4	.4	1.1	1.0	1.2	.8	.8	.2								121	121	159	104
62/ 61	.1	.6	.2	.4	.7	1.0	1.2	1.1	.6									113	113	139	112
60/ 59	.1	.5	.6	.4	.8	1.1	.8	1.6	.4									122	122	153	134
58/ 57	.1	.5	.3	.4	.6	.9	1.3	.9	.2									99	99	121	120
56/ 55	.2	.3	.4	.3	.4	.8	1.4	.7	.1									86	86	149	102
54/ 53	.1	.1	.2	.2	.2	.8	1.1	.5										60	60	144	121
52/ 51		.2	.4	.3	.3	.6	.9											50	50	137	98
50/ 49		.2	.4	.2	.4	.7	.6											48	48	104	95
48/ 47		.2	.1	.2	.3	.5	.1											25	25	95	79
46/ 45	.1	.1		.1	.4	.2	.1											16	16	106	88
44/ 43		.1			.2	.2												8	8	72	77
42/ 41				.	.2													4	4	58	87
40/ 39				.1	.1													3	3	44	78
38/ 37																				23	75
36/ 35																				8	75
34/ 33																				7	43
32/ 31																				2	54
30/ 29																					56
28/ 27																					49
26/ 25				.1														2	2		46
24/ 23			.1															1	1		49
22/ 21																					29
20/ 19																				3	14

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	> 31			Dry Bulb	Wet Bulb	Dew Point
18/ 17																						11
16/ 15																						5
12/ 11																						2
10/ 9																						1
8/ 7																						1
-2/ -3																						2
TOTAL	.9	4.7	6.2	8.1	15.3	18.4	18.2	15.3	9.6	2.8	.5	.1							1979	1979	1979	1979

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6362012	106438	53.8	17.951	1979							
Dry Bulb	8878141	131357	66.4	8.973	1979		.1	42.9	25.3	3.9		90
Wet Bulb	6480776	111832	56.5	9.028	1979		.2	13.3	.8			90
Dew Point	4889912	94742	47.9	13.389	1979	.1	14.9	4.2	.1			90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21	22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85									.1	.1									4	4		
84/ 83							.1	.1	.2	.1									9	9		
82/ 81				.1			.2	.1	.2	.2									14	14		
80/ 79				.1	.1	.7	.6	.4	.1										38	38		
78/ 77			.1	.4	.7	.8	1.2	.7	.6	.2	.1	.1							93	93		
76/ 75			.5	.6	1.4	1.0	.9	.9	.4	.3	.1								115	115	2	
74/ 73		.2	.6	1.2	1.2	1.3	.9	.7	.3	.2	.2			.1					131	131	4	
72/ 71		.4	.7	1.5	1.6	1.4	1.1	.8	.7	.6	.1	.1							171	171	34	9
70/ 69	.1	.7	1.2	2.0	1.7	1.4	.8	1.0	1.0	.5	.1								207	207	78	26
68/ 67	.1	.7	1.4	1.7	1.6	1.5	.9	1.5	1.2	.2	.1								212	212	120	49
66/ 65	.2	.7	.7	1.2	1.4	1.0	1.2	1.5	.4	.3	.1								169	169	165	80
64/ 63	.1	.4	.5	.9	1.4	1.1	1.4	1.3	.3	.2									144	144	160	113
62/ 61		.4	.4	.9	.9	1.1	1.2	1.3	.5	.1									131	131	179	105
60/ 59	.3	.4	.5	.8	.5	1.3	1.1	1.1	.3										119	119	133	143
58/ 57		.5	.4	.7	.8	1.1	.8	1.2	.3										111	111	143	118
56/ 55	.1	.3	.1	.5	.5	1.0	1.0	.8											88	88	140	116
54/ 53	.1	.3	.2	.7	.3	.6	1.2	.6											75	75	148	119
52/ 51	.1	.5	.3	.4	.4	.8	.8												62	62	144	115
50/ 49		.2		.1	.1	.7	.5	.1											32	32	129	83
48/ 47		.4	.1	.2	.2	.5	.1												27	27	103	75
46/ 45			.2		.2	.3	.1												12	12	96	84
44/ 43	.1	.1		.2	.1	.1													8	8	63	89
42/ 41				.1	.1	.1													4	4	65	72
40/ 39						.1													1	1	43	99
38/ 37																					16	89
36/ 35																					8	66
34/ 33																					3	44
32/ 31																					1	45
30/ 29					.1														1	1		53
28/ 27				.1															1	1		43
26/ 25				.1															1	1		33
24/ 23																						37
22/ 21																					2	37
20/ 19																					1	21

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
18/ 17																					7
16/ 15																					1
14/ 13																					4
12/ 11																					2
-2/ -3																					2
-8/ -9																					1
TOTAL	.9	6.1	7.6	13.9	14.9	17.2	15.8	13.7	0.4	2.7	.7	.1	.1					1980	1980	1980	1980

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6989520	111522	56.3	18.916	1980							
Dry Bulb	8621476	129614	65.5	8.312	1980		.1	45.2	18.4	2.1		90
Wet Bulb	6423132	111464	56.3	8.656	1980		.2	10.8	.3			90
Dew Point	4939015	95393	48.2	13.108	1980	.1	13.0	3.8				90

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

 1800-2030 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
78/ 77							.1											1	1		
76/ 75			.1	.1	.1	.1			.1									5	5		
74/ 73	.1	.3	.3	.3	.4	.1												26	26	1	1
72/ 71		.3	.8	.7	.3	.1												39	39	7	
70/ 69		1.6	1.8	1.4	.4	.2	.1											107	107	21	13
68/ 67	.4	2.3	2.8	1.4	.6	.2		.1										150	150	71	44
66/ 65	.4	2.9	2.5	1.4	.7	.3	.2	.1										166	166	133	87
64/ 63	.2	3.0	3.4	1.2	.6	.3	.2	.1	.2									179	179	139	106
62/ 61	.2	2.2	2.3	1.8	.5	.3	.4											157	157	161	142
60/ 59	.2	2.1	2.2	1.8	.8	.5	.4	.2										156	156	151	133
58/ 57	.3	1.7	2.7	1.5	1.5	.8	.3	.2										174	174	127	130
56/ 55	.1	1.6	1.6	2.5	1.3	.7	.2											157	157	146	118
54/ 53		1.1	1.8	1.8	1.0	.6	.2	.1										128	128	125	117
52/ 51	.3	.9	1.9	1.1	.9	.6	.2											114	114	118	128
50/ 49	.1	1.1	1.9	1.2	1.1	.7	.1											120	120	155	87
48/ 47		.4	1.4	1.0	.7	.4	.1											77	77	140	78
46/ 45		.6	1.2	1.2	1.1	.2												84	84	107	104
44/ 43		.3	.7	.9	.5	.1												51	51	94	110
42/ 41		.2	.3	.6	.4	.1												33	33	79	89
40/ 39		.3	.3	.4	.1													25	25	73	88
38/ 37		.1	.4	.3	.1													15	15	53	64
36/ 35		.1	.2	.1														7	7	42	67
34/ 33		.1	.1	.1														4	4	19	50
32/ 31		.1	.1															2	2	8	45
30/ 29																				4	44
28/ 27																				3	49
26/ 25				.1														2	2		35
24/ 23			.1															1	1		26
22/ 21																					8
20/ 19																				3	3
18/ 17																					5
16/ 15																					4
14/ 13																					1
12/ 11																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48~69 YEARS | NOV MONTH

PAGE 2 | 1800~2000 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
61 5																					1
41 3																					1
-21 -3																					1
TOTAL	2,0	27,1	31,1	22,5	12,6	5,9	2,1	,5	,2										1980		1980
																		1980		1980	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum	11216012	145822	73,6	15,518	1980							
Dry Bulb	6761134	114468	57,8	8,515	1980		,2	14,9	1,5			90
Wet Bulb	5790003	105495	53,3	9,246	1980		,8	4,5	,0			90
Dew Point	5036333	96969	49,0	12,050	1980	,0	10,2	2,6	,0			90

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | NOV MONTH

PAGE 1 | 2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
78/ 77			.1															1	1		
76/ 75			.1															1	1		
74/ 73		.2	.3	.1	.1													10	10	1	
72/ 71		.2	.5	.2														15	15	4	3
70/ 69		1.2	1.1	.5	.1													57	57	13	8
68/ 67	.5	2.5	1.1	.5	.2													95	95	57	43
66/ 65	.9	4.1	1.1	.5	.1	.1	.1											133	133	101	82
64/ 63	.5	3.3	1.9	.6			.1											126	126	119	93
62/ 61	.7	3.7	2.2	.7	.2	.1	.1											150	150	121	111
60/ 59	.6	3.9	1.7	1.1	.3	.3												155	155	142	115
58/ 57	.7	2.6	1.9	.4	.3		.2											120	120	137	136
56/ 55	.4	3.5	1.9	1.3	.7	.2	.2											159	159	116	114
54/ 53	.1	2.6	1.5	1.3	.6	.2	.1											126	126	126	115
52/ 51	.4	1.8	2.0	1.4	.7	.4	.2											159	133	107	113
50/ 49	.2	2.5	2.1	.8	.7	.4	.1											132	132	117	89
48/ 47	.1	2.1	1.7	1.1	.6	.2	.1											114	114	140	91
46/ 45	.1	2.3	1.5	.8	.5	.2												106	106	117	92
44/ 43	.2	2.0	1.6	.5	.4	.1												93	93	113	118
42/ 41	.1	1.3	1.1	.9	.4	.1												75	75	110	105
40/ 39		1.1	1.1	1.0	.3													67	67	95	85
38/ 37		.8	1.0	.4	.1													44	44	64	73
36/ 35		.8	1.0	.1	.1													36	36	70	70
34/ 33		.4	.1	.1														10	10	60	78
32/ 31		.3	.1	.1														9	9	23	46
30/ 29		.1	.3															7	7	10	46
28/ 27	.1		.1															3	3	10	49
26/ 25																				3	45
24/ 23			.2															3	3	1	23
22/ 21																					16
20/ 19																				3	4
18/ 17																					5
16/ 15																					6
14/ 13																					2
10/ 9																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13874 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) NOV (MONTH)

2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
8/ 7																					2
6/ 5																					1
TOTAL	5	443	028	514	0	6.0	2.0	.9										1980	1980	1980	1980

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13128511	158773	80.2	14.159	1980							
Dry Bulb	5992657	107297	54.2	9.469	1980		1.0	8.1	.5			90
Wet Bulb	5364103	101113	51.1	10.067	1980		2.3	3.4	.0			90
Dew Point	4838652	96830	47.9	12.248	1980		11.2	2.5				90

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
72/ 71				.1														2	2		
70/ 69		.0	.0	.0														3	3		
68/ 67	.3	.8	.3	.3														35	35	10	6
66/ 65	.4	1.3	.8	.1														52	52	30	18
64/ 63	.7	2.0	.4	.3	.0													72	72	59	44
62/ 61	.3	2.4	.6	.2														77	77	66	70
60/ 59	.8	2.1	.5	.3		.1	.0											81	81	80	61
58/ 57	1.2	2.2	.4	.2														82	83	103	94
56/ 55	1.0	1.8	1.2	.6	.1	.1	.1											101	101	64	83
54/ 53	.9	2.2	1.4	.6	.1	.1												109	109	76	67
52/ 51	.7	2.8	.8	.3	.2	.0												101	101	98	70
50/ 49	.6	2.9	1.6	.6	.2	.0												120	120	109	99
48/ 47	.6	2.2	1.2	.9	.5	.1												113	113	99	86
46/ 45	.2	2.9	2.0	1.7	.3													145	145	102	77
44/ 43	.5	2.6	2.1	1.4	.2	.1												141	141	112	88
42/ 41	.4	2.6	2.7	1.2	.4	.0												153	153	137	95
40/ 39	.3	1.8	2.9	1.0	.3													131	131	155	105
38/ 37	.1	2.5	2.3	.7	.2													120	120	125	89
36/ 35	.0	1.9	1.9	.5	.1													99	99	143	97
34/ 33	.1	2.2	1.4	1.0	.0													96	96	116	141
32/ 31	.2	1.9	1.3	.7														87	87	104	114
30/ 29		1.4	.9	.3														53	53	86	121
28/ 27	.1	1.0	.2															29	29	79	88
26/ 25		.8	.3															23	23	47	73
24/ 23		.1	.2															7	7	22	56
22/ 21			.0															1	1	8	47
20/ 19	.1	.1	.0															5	5	6	43
18/ 17		.1																2	2	1	28
16/ 15		.0																1	1	3	34
14/ 13																				1	23
12/ 11																					14
10/ 9																					6
8/ 7																					1
6/ 5																					3

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	> 80 F	≥ 93 F	Total
Rel. Hum												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

 0000-0200 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	> 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	9.8	44.6	28.0	13.7	3.0	.7	.2											2041	2042	2041	2041

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	> 73 F	> 80 F	> 93 F	Total
Rel. Hum.	13376361	162503	79.6	14.653	2041							
Dry Bulb	4602846	94484	46.3	10.640	2042		9.5	1.8				93
Wet Bulb	4128941	98973	43.6	11.078	2041		16.3	.5				93
Dew Point	3630677	81645	40.0	13.370	2041		29.7	.3				93

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	> 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
70/ 69		.0	.1															4	4		
68/ 67	.0	.2	.3	.0														12	12	4	2
66/ 65	.5	2.1	.9	.2	.0													69	69	22	18
64/ 63	.6	1.4	.4	.2		.0												54	54	66	41
62/ 61	.6	2.4	.5	.1														73	73	64	70
60/ 59	.9	1.6	1.0	.2	.1													80	80	73	63
58/ 57	1.2	1.4	.6		.2													70	72	79	74
56/ 55	1.2	2.6	1.4	.2	.1		.1											116	117	66	67
54/ 53	1.0	2.3	1.4	.4		.1												108	106	95	86
52/ 51	.8	1.7	.5	.2	.0	.1												69	69	89	79
50/ 49	1.0	2.5	1.3	.3	.4													111	111	106	91
48/ 47	.5	2.9	1.0	.2	.4													102	102	80	62
46/ 45	.3	3.0	1.5	.7	.1													115	115	101	72
44/ 43	.5	2.6	1.8	1.0														121	121	102	95
42/ 41	.3	2.5	2.4	.8	.1													126	126	105	86
40/ 39	.5	2.5	3.3	1.1	.1													154	154	130	76
38/ 37	.3	2.5	2.5	.8	.2													126	128	130	92
36/ 35	.1	3.0	2.5	.7														128	128	137	88
34/ 33	.0	3.0	2.0	.6														117	117	140	109
32/ 31	.0	1.6	1.0	.4														62	62	122	124
30/ 29	.3	2.7	1.6	.3														102	102	99	145
28/ 27	.3	1.2	.9	.1														51	51	87	109
26/ 25		1.3	.6															38	38	65	83
24/ 23	.0	.6	.3															20	20	43	62
22/ 21		.1	.0															3	3	21	57
20/ 19	.1	.1																4	4	7	52
18/ 17		.1																2	2	2	20
16/ 15		.0																1	1	2	29
14/ 13		.1																2	2	2	34
12/ 11																				1	18
10/ 9																					8
8/ 7																					5
6/ 5																					2
4/ 3																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 75 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

PAGE 2 | 0300-0500 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
TOTAL	11.4	48.1	29.5	8.8	1.9	.3	.1												2040	2043	2040	2040

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13787969	165347	81.1	13.762	2040							
Dry Bulb	4358821	91575	44.8	11.155	2043		13.0	.7				93
Wet Bulb	3945434	86592	42.4	11.504	2040		20.6	.2				93
Dew Point	3498438	79780	39.1	13.623	2040		34.1	.1				93

USAFETAC F-3AM Jul. 64 0-26-5 (OLI) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PAGE 1 0600-0800 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
70/ 69		.0	.1															3	3		
68/ 67	.1	.5	.7															17	17	9	7
66/ 65	.1	1.6	.3	.1														44	44	20	10
64/ 63	.4	1.8	.3	.0														51	51	44	37
62/ 61	.8	2.3	.7				.0											77	77	69	58
60/ 59	1.2	1.7	.5	.1	.0													71	71	71	68
58/ 57	1.2	1.6	.4	.1	.1	.0												70	72	68	70
56/ 55	1.0	2.7	1.0	.4	.0	.0												107	107	72	75
54/ 53	.7	2.4	1.1	.4														95	95	86	73
52/ 51	.7	1.9	.8	.4	.1	.1												83	83	87	72
50/ 49	.7	2.3	1.0	.2	.1	.2												93	93	89	74
48/ 47	.8	2.7	1.6	.4	.2													119	119	94	86
46/ 45	.5	2.5	1.9	.8		.1												121	121	95	89
44/ 43	.7	3.0	1.9	.9	.0													132	132	116	70
42/ 41	.6	2.5	2.3	.4														120	120	116	111
40/ 39	.7	2.3	1.7	.8	.0													113	113	129	93
38/ 37	.4	2.7	2.7	.4														129	129	116	100
36/ 35	.1	3.3	2.7	.7	.1													141	141	117	81
34/ 33	.3	3.4	2.3	.2														127	127	145	96
32/ 31	.0	2.8	1.6	.4														99	99	131	124
30/ 29	.2	1.9	1.1	.2														70	70	117	132
28/ 27	.4	1.6	1.1	.2														67	67	80	118
26/ 25	.2	.9	.3															29	29	67	89
24/ 23	.0	1.2	.4															34	34	42	76
22/ 21	.0	.8	.1															19	19	35	44
20/ 19	.1	.2																6	6	19	54
18/ 17		.1																2	2	3	40
16/ 15																				2	31
14/ 13		.0																1	1		22
12/ 11		.1																2	2	3	21
10/ 9																					10
8/ 7																					6
6/ 5																					2
4/ 3																					3

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

PAGE 2 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	12.3	50.9	27.9	7.5	.9	.5	.0											2042	2044	2042	2042

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	13962142	166660	81.6	13.281	2042							
Dry Bulb	4230753	90091	44.1	11.279	2044		15.0	.9				93
Wet Bulb	3846999	85417	41.8	11.587	2042		22.7	.4				93
Dew Point	3419402	78822	38.6	13.588	2042		35.2	.3				93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
78/ 77					.1	.1												4	4		
76/ 75				.1	.4	.1				.0								14	14		
74/ 73			.0	.3	.3	.1	.1											18	18		
72/ 71		.1	.1	.7	.3	.2		.0										30	30	2	
70/ 69	.0	.5	.8	.6	.4	.1	.0	.1										53	53	12	5
68/ 67	.1	.6	1.1	.6	.3	.4	.0	.1		.0								71	71	34	18
66/ 65	.2	1.3	1.2	.4	.3	.2		.1	.0									79	79	75	20
64/ 63	.1	1.8	.8	.6	.4	.3		.2		.0								88	88	69	83
62/ 61	.3	1.6	1.1	.8	.4	.5	.3		.0									104	104	87	76
60/ 59	.5	1.0	.8	1.0	.7	.4	.4	.1	.1									105	83	82	
58/ 57	.2	1.1	.9	.6	.6	.6	.7	.1	.0									102	102	79	65
56/ 55	.2	1.7	1.3	1.1	1.0	.6	.5	.1	.1									134	134	84	63
54/ 53	.1	1.2	1.5	1.1	1.2	.9	.3	.1										131	131	90	87
52/ 51	.4	1.4	1.4	1.2	1.0	.6	.3											130	130	100	69
50/ 49	.3	1.4	1.6	1.2	1.8	1.0	.2											152	152	126	77
48/ 47	.5	1.2	1.5	1.9	1.7	.9	.1											159	159	135	94
46/ 45	.2	1.3	1.2	2.1	1.6	.3	.0											137	137	143	99
44/ 43	.2	1.5	1.5	1.7	1.0	.3												128	128	150	88
42/ 41	.1	.7	1.5	1.8	.8	.2												106	106	146	97
40/ 39	.3	.3	1.3	1.1	.9													83	83	150	93
38/ 37		.3	.9	1.9	.5	.0												76	76	123	81
36/ 35		.5	.7	.7	.2													46	46	95	112
34/ 33	.0	.2	.5	.9	.1													37	37	78	112
32/ 31		.3	.3	.4														21	21	77	111
30/ 29		.1	.1	.5														16	16	38	106
28/ 27		.1	.2	.1														10	10	33	72
26/ 25			.1	.0														4	4	13	76
24/ 23		.1	.1															4	4	12	53
22/ 21																				5	43
20/ 19			.0															1	1	3	52
18/ 17																				1	27
16/ 15		.0																1	1		30
14/ 13																				1	20
12/ 11																					15

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
10/ 9																					5
8/ 7																					4
6/ 5																					3
4/ 3																					4
2/ 1																					2
TOTAL	4.1	20.5	23.0	23.5	16.3	8.1	3.1	1.0	.3	.1									2044		2044
																		2044		2044	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	10238332	139708	68.4	18.368	2044							
Dry Bulb	5689528	105682	51.7	10.504	2044		2.6	8.6	1.6			93
Wet Bulb	4702777	95577	46.8	10.693	2044		8.3	2.2				93
Dew Point	3809811	83459	40.8	14.029	2044		28.3	1.0				93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

PAGE 1 | 1200-1400 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
82/ 81							.1	.1										4	4		
80/ 79						.2	.4	.1	.1									10	19		
78/ 77				.1	.4	.7	.4	.1	.1									41	42		
76/ 75				.2	.7	.7	.7	.1		.1								53	53		
74/ 73			.1	.5	.9	1.0	.6	.0	.2	.1	.1							74	74		
72/ 71			.1	.6	.7	.7	.8	.4	.2	.1	.2							78	78	5	
70/ 69	.0	.1	.7	1.1	.8	1.0	.8	.7	.1	.3	.2	.0						124	124	31	1
68/ 67	.0	.6	.8	.6	1.0	.8	1.0	.3	.1	.3	.1							115	115	69	14
66/ 65	.1	.5	.7	.7	.6	1.2	.8	.6	.4	.1								118	118	90	43
64/ 63		.7	.6	.7	.7	1.4	1.1	.8	.6	.2								144	144	100	78
62/ 61	.3	.7	.6	.6	.8	.8	1.0	1.2	.7	.2								147	147	106	80
60/ 59	.3	.7	.5	.7	1.2	1.1	1.2	1.2	.5	.0								154	154	92	95
58/ 57	.1	.7	.2	.3	1.1	.9	1.3	.9	.3	.0								122	122	106	75
56/ 55	.1	.7	.4	.9	1.3	1.3	1.9	.5	.1									149	149	135	60
54/ 53	.0	.4	.4	.5	1.1	1.5	1.4	.4										119	119	95	86
52/ 51	.2	.6	.5	.8	1.1	1.6	1.5	.3										135	135	135	72
50/ 49	.1	.7	.5	.6	.8	1.5	1.1	.1										111	111	140	71
48/ 47	.0	.7	.3	.4	1.0	1.1	.4											80	80	160	100
46/ 45	.3	.7	.2	.4	1.1	1.2	.3											87	87	181	98
44/ 43	.1	.3	.2	.4	.5	1.2	.1											59	59	144	110
42/ 41	.2	.0	.3	.1	.6	.7	.0											42	42	110	72
40/ 39	.1	.1	.2	.2	.2	.3												24	24	105	92
38/ 37		.0	.1	.2	.3	.0												15	15	80	81
36/ 35	.0	.2	.0	.2	.1													14	14	51	70
34/ 33	.1		.0	.0	.0													5	5	55	93
32/ 31			.0	.0	.1													5	5	26	101
30/ 29				.0	.1													3	3	14	116
28/ 27				.0														1	1	4	63
26/ 25																				3	63
24/ 23																				4	58
22/ 21																				1	43
20/ 19																					38
18/ 17																					32
16/ 15																					30

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 *REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
14/ 13																				23
12/ 11																				21
10/ 9																				8
8/ 7																				3
6/ 5																				5
4/ 3																				2
2/ 1																				3
0/ -1																				2
TOTAL	2.4	8.5	7.7	11.4	17.7	21.1	17.1	8.1	3.7	1.8	.6	.0						2043		2042
																	2042		2042	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature					
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7062190	112726	55.2	20.279	2042							
Dry Bulb	7278365	120185	58.8	10.096	2043		.4	23.2	8.7	.5		93
Wet Bulb	5389771	102953	50.4	9.877	2042		2.4	4.8				93
Dew Point	3910640	84242	41.3	14.603	2042	.1	28.7	.7				93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
82/ 81								.0										1	1		
80/ 79						.1	.3	.1	.0									13	13		
78/ 77					.0	.2	.1											7	7		
76/ 75				.2	.5	.4	.2	.2				.0						35	35		
74/ 73			.0	.7	.7	.4	.3	.2	.0	.0	.1	.0						56	56		
72/ 71		.0	.4	.8	.5	.3	.3	.3	.1	.2	.2							66	66	1	
70/ 69		.2	1.1	1.2	.8	.4	.7	.5	.2	.0	.1	.1						111	111	16	1
68/ 67		.8	1.3	1.3	1.0	.9	.5	.3	.4	.1	.0	.0						136	136	65	11
66/ 65	.3	.6	1.5	1.0	.8	1.0	1.0	.6	.4	.1	.1							154	154	86	46
64/ 63	.2	.9	1.0	1.0	1.2	1.1	1.0	1.1	1.2	.3								187	187	105	86
62/ 61	.3	.8	1.0	.8	1.1	.9	.8	.6	.3	.1								140	140	112	83
60/ 59	.3	.4	.5	1.0	1.3	.8	1.0	1.0	.6	.1								146	146	100	99
58/ 57	.0	.8	.6	.8	1.1	1.1	1.3	1.0	.3	.1								148	148	100	79
56/ 55	.2	.5	.6	1.0	1.0	1.3	1.8	.8	.0									152	152	140	73
54/ 53	.0	.7	.3	.9	1.1	1.9	1.8	.4										148	148	120	69
52/ 51	.1	.9	.4	1.0	.9	1.4	1.4	.3										133	134	143	90
50/ 49	.1	.2	.4	.8	1.0	1.2	1.1	.2			.0							103	103	155	105
48/ 47	.3	.7	.2	.3	.7	.8	.9											83	83	136	86
46/ 45	.2	.7	.4	.2	.7	1.1	.4											76	76	182	108
44/ 43	.1	.1	.3	.6	.5	1.2	.3											67	67	152	92
42/ 41		.1		.4	.4	.3												25	25	124	77
40/ 39	.1	.2	.3	.1	.3	.2												26	26	84	83
38/ 37		.1	.1	.1	.1													11	11	75	80
36/ 35			.2		.0													5	5	67	86
34/ 33	.1		.1	.1	.1													8	8	38	72
32/ 31		.0	.0		.1													5	5	27	85
30/ 29				.0														1	1	6	112
28/ 27																				3	80
26/ 25																				2	67
24/ 23																				4	51
22/ 21																					50
20/ 19																					38
18/ 17																					35
16/ 15																					31

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel Hum												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

 1500-1700 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
14/ 13																					25
12/ 11																					20
10/ 9																					4
8/ 7																					8
6/ 5																					4
4/ 3																					4
0/ -1																					2
-2/ -3																					1
TOTAL	2.6	9.1	11.1	14.7	16.2	17.1	15.3	7.8	3.8	1.3	.6	.2						2043	2044	2043	2043

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7540186	116224	56.9	21.322	2043							
Dry Bulb	7167209	119577	58.5	9.170	2044		.3	19.3	5.1	.2		93
Wet Bulb	5396449	103199	50.5	9.480	2043		1.9	3.7				93
Dew Point	3975799	85037	41.6	14.616	2043	.1	28.1	.5				93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (YEARS) DEC (MONTH)

PAGE 1 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
72/ 71				.0	.1													3	3		
70/ 69		.0	.2	.3	.0													13	13		
68/ 67	.2	1.2	1.5	.2	.2					.0								69	69	11	5
66/ 65	.5	2.2	2.0	.3	.0	.0	.0	.0										107	107	54	23
64/ 63	.5	1.6	1.9	.7	.1				.0									100	100	93	85
62/ 61	.2	2.3	1.8	.7	.3	.3	.1											109	109	93	66
60/ 59	.6	1.5	2.0	.8	.6	.2	.2											120	120	103	105
58/ 57	.1	1.4	1.6	1.3	.7	.5	.1	.2										124	124	74	84
56/ 55	.3	1.8	2.2	1.6	1.0	.4	.3											156	156	114	63
54/ 53	.1	1.6	2.1	1.6	.7	.5	.2											142	142	90	91
52/ 51	.2	1.5	1.8	2.2	1.3	.6	.2											158	158	130	82
50/ 49	.1	1.2	2.3	1.8	1.8	.4	.1											160	160	127	104
48/ 47	.4	1.0	2.0	2.2	2.0	.4	.0											166	166	146	84
46/ 45	.4	1.7	1.7	2.1	1.5	.5	.1											165	165	150	114
44/ 43	.2	.8	1.5	1.7	.9	.4												114	114	160	93
42/ 41	.2	.5	1.6	1.9	.9	.1												107	107	155	119
40/ 39		.3	1.4	.7	1.0	.1												78	78	136	126
38/ 37		.4	.9	1.2	.7													66	66	111	102
36/ 35		.4	.7	.4	.1													35	35	106	80
34/ 33		.2	.5	.2	.0													21	21	62	35
32/ 31		.1	.3	.2														13	13	63	117
30/ 29	.1		.3	.0														10	10	32	103
28/ 27			.1	.1														5	5	18	67
26/ 25		.0	.0	.0														3	3	7	50
24/ 23			.0															1	1	5	47
22/ 21																				4	33
20/ 19																				1	21
18/ 17																					38
16/ 15																					27
14/ 13																					16
12/ 11																					5
10/ 9																					3
8/ 7																					2
6/ 5																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

PAGE 2 | 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
4/ 3																						3
2/ 1																						1
TOTAL	4.4	22.3	29.6	22.4	14.4	4.6	1.6	.2	.0	.0									2045	2045	2045	2045

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11097940	146436	71.6	17.305	2045							
Dry Bulb	5625831	105655	51.7	9.043	2045		1.5	3.9				93
Wet Bulb	4780606	96812	47.3	9.828	2045		5.9	.5				93
Dew Point	3992789	86253	42.2	13.176	2045		24.3	.2				93

USAFETAC FORM 0-26-5 (OL1) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13824 STATION | SAVANNAH GEORGIA/HUNTER AAF STATION NAME | 48-69 YEARS | DEC MONTH

 2100-2300 HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B.-W.B.	Dry Bulb	Wet Bulb	Dew Point
70/ 69	.1		.1	.1	.1													9	9	2	2
68/ 67	.1	.4	.8	.2	.1													33	33	5	4
66/ 65	.5	1.7	1.2	.3	.0		.0											78	78	39	21
64/ 63	.5	2.0	1.1	.3														81	81	67	56
62/ 61	.2	2.5	1.0	.1	.0		.0											83	83	75	60
60/ 59	1.1	2.3	.9	.1	.1	.1												94	94	101	83
58/ 57	.8	1.7	.7	.2	.3	.2	.0	.0	.0									85	85	93	97
56/ 55	.9	2.5	1.3	.8	.4	.1												124	124	74	91
54/ 53	.5	2.2	1.3	1.2	.2	.1		.0										115	115	75	68
52/ 51	.6	3.2	1.4	.7	.4	.2	.0											133	133	108	75
50/ 49	.3	2.7	1.9	1.2	.8	.1	.1											149	149	134	87
48/ 47	.3	2.1	2.0	1.6	.5	.0												133	133	112	100
46/ 45	.6	2.4	1.9	2.0	.5		.0											152	152	133	95
44/ 43	.0	2.4	2.4	1.6	.7	.0												149	149	126	100
42/ 41	.3	2.4	2.1	1.6	.6													145	145	148	113
40/ 39	.2	1.6	2.4	1.0	.5	.0												118	118	160	110
38/ 37	.3	1.6	1.4	.9	.3													92	92	129	106
36/ 35	.0	1.9	1.8	1.1	.2													103	103	120	107
34/ 33	.0	1.0	1.0	.7														56	56	94	110
32/ 31		1.2	.9	.4														52	52	82	108
30/ 29	.1	.4	.5															21	21	80	105
28/ 27		.4	.6															20	20	40	62
26/ 25		.2	.2	.0														9	9	25	78
24/ 23		.1	.1															4	4	10	45
22/ 21		.0	.1															3	3	4	30
20/ 19			.0															1	1	4	33
18/ 17																				2	40
16/ 15																					26
14/ 13																					15
12/ 11																					9
8/ 7																					2
6/ 5																					4
TOTAL	7.9	39.0	29.0	16.5	6.1	1.1	.3	.1	.0									2042	2042		2042
																				2042	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	12856378	158996	77.8	15.372	2043							
Dry Bulb	4963401	98585	48.3	9.994	2042		9.0	1.9				93
Wet Bulb	4397005	92293	45.2	10.514	2042		11.2	.3				93
Dew Point	3829335	84335	41.3	13.029	2042		25.4	.3				93

USAFETAC FORM 0-26-5 (OLI) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DRY-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

13824 STATION — SAVANNAH GEORGIA/HUNTER AAF STATION NAME — 48-70 YEARS

HRS (L S T)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV.	DEC	ANNUAL
00-02	MEAN	45.6	48.1	53.0	60.2	67.5	73.4	75.5	75.3	71.5	61.9	52.5	46.3	60.7
	S D	10.652	10.185	9.337	7.233	5.451	4.301	2.822	3.066	4.615	8.226	9.878	10.640	13.598
	TOTAL OBS	2139	1950	2048	1889	2044	1890	1952	1953	1935	2036	1980	2042	23850
03-05	MEAN	44.1	46.5	51.2	58.1	65.5	71.6	74.0	73.7	70.1	60.1	50.7	44.8	59.0
	S D	11.119	10.702	9.799	7.701	5.885	4.353	2.643	2.894	4.782	8.587	10.225	11.155	13.784
	TOTAL OBS	2139	1950	2050	1890	2065	1916	1979	1979	1959	2036	1979	2043	23985
06-08	MEAN	43.3	45.9	51.3	59.0	68.1	74.2	76.2	75.3	70.9	60.5	50.6	44.1	59.9
	S D.	11.486	10.982	10.002	8.035	6.331	4.909	3.514	3.657	5.177	8.748	10.388	11.279	14.004
	TOTAL OBS	2138	1949	2102	1939	2127	1968	2031	2033	1972	2037	1977	2044	24317
09-11	MEAN	50.3	53.3	59.9	69.2	77.0	82.1	83.8	83.4	78.5	69.7	60.0	51.7	68.2
	S D	11.376	10.797	9.951	7.385	6.200	5.222	4.114	4.577	5.719	7.772	9.589	10.504	14.753
	TOTAL OBS	2139	1948	2127	1962	2126	1968	2030	2034	1973	2037	1980	2044	24368
12-14	MEAN	57.4	60.0	65.4	73.8	81.0	85.7	87.3	87.1	82.3	74.9	66.4	58.8	73.2
	S D	11.320	10.633	10.002	7.538	6.791	5.825	4.883	5.395	5.783	7.143	8.973	10.096	13.666
	TOTAL OBS	2139	1949	2126	1964	2126	1953	2016	2021	1968	2036	1979	2043	24320
15-17	MEAN	57.6	60.4	65.3	73.2	79.9	84.2	85.3	85.5	81.2	74.2	65.5	58.5	72.5
	S D.	10.455	9.926	9.370	7.138	6.685	6.053	5.680	5.602	5.508	6.702	8.312	9.170	12.905
	TOTAL OBS	2139	1950	2102	1939	2118	1953	2016	2022	1968	2034	1980	2044	24265
18-20	MEAN	51.0	54.1	59.3	67.3	74.3	79.5	80.8	80.5	76.2	67.4	57.8	51.7	66.4
	S D	9.610	9.080	8.479	6.483	5.493	5.079	4.462	4.262	4.530	6.952	8.515	9.043	13.183
	TOTAL OBS	2138	1950	2050	1890	2045	1889	1953	1957	1938	2035	1980	2045	23870
21-23	MEAN	47.3	50.3	55.2	62.7	69.9	75.6	77.4	77.2	73.2	63.8	54.2	48.3	62.7
	S D	10.093	9.502	8.574	6.584	4.918	4.155	3.118	3.232	4.438	7.776	9.489	9.994	13.335
	TOTAL OBS	2137	1949	2047	1890	2046	1890	1951	1952	1937	2036	1980	2042	23857
ALL HOURS	MEAN	49.6	52.4	57.6	65.6	73.0	78.3	80.1	79.8	75.5	66.6	57.2	50.5	65.4
	S D	11.976	11.532	10.915	9.299	8.212	7.087	6.175	6.376	6.781	9.551	11.137	11.592	14.738
	TOTAL OBS	17108	15595	16652	15363	16697	15427	15928	15951	15650	16287	15835	16347	192840

USAF ETAC FORM JUL 64 0-89-5 (OL 1)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

WET-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

13824 SAVANNAH GEORGIA/HUNTER AAF 48-70

STATION STATION NAME YEARS

HRS (L S T)		JAN	FEB	MAR	APR.	MAY	JUN	JUL	AUG	SEP.	OCT	NOV	DEC.	ANNUAL
00-02	MEAN	43.1	45.4	49.8	57.0	64.6	70.4	72.8	72.7	68.9	59.5	50.0	43.6	57.9
	S D	10,998	10,497	9,886	7,882	5,648	4,084	2,547	2,828	5,114	8,754	10,375	11,078	13,787
	TOTAL OBS	2139	1950	2048	1889	2045	1890	1952	1953	1935	2036	1980	2041	23858
03-05	MEAN	41.9	44.2	48.5	55.5	63.2	69.3	71.9	71.7	67.9	58.0	48.3	42.4	56.8
	S D	11,410	11,039	10,409	8,345	6,124	4,314	2,326	2,828	5,321	9,094	10,677	11,504	14,045
	TOTAL OBS	2139	1950	2050	1890	2065	1916	1979	1979	1959	2036	1978	2040	23981
06-08	MEAN	41.3	43.7	48.6	56.5	64.6	70.5	72.9	72.4	68.2	58.1	48.3	41.8	57.2
	S D	11,709	11,341	10,586	8,478	6,178	4,340	2,685	3,063	3,606	9,200	10,819	11,587	14,595
	TOTAL OBS	2138	1949	2102	1939	2127	1968	2031	2033	1972	2037	1976	2042	24314
09-11	MEAN	45.8	48.2	52.7	60.3	67.6	73.0	75.6	75.2	71.3	62.9	53.8	46.8	61.0
	S D	11,229	10,706	9,880	7,724	5,475	4,108	2,428	2,935	5,087	7,910	9,916	10,693	13,538
	TOTAL OBS	2139	1949	2127	1963	2126	1968	2030	2030	1973	2037	1980	2044	24366
12-14	MEAN	49.4	51.3	54.9	61.7	68.4	73.8	76.2	75.9	72.2	64.6	56.5	50.4	62.9
	S D	10,566	9,905	9,221	7,263	5,304	4,193	2,553	2,981	4,562	7,188	9,028	9,877	12,346
	TOTAL OBS	2139	1949	2126	1964	2147	1953	2016	2019	1968	2036	1979	2042	24319
15-17	MEAN	49.7	51.5	55.0	61.7	68.3	73.6	75.9	75.6	72.0	64.5	56.3	50.5	62.8
	S D	9,974	9,193	8,642	6,883	4,958	3,963	2,761	3,073	4,392	6,945	8,656	9,480	11,987
	TOTAL OBS	2139	1950	2102	1939	2118	1953	2016	2022	1968	2034	1980	2043	24264
18-20	MEAN	46.5	48.8	52.8	60.0	67.2	72.5	74.8	74.6	71.0	62.6	53.3	47.3	60.7
	S D	10,026	9,190	8,590	6,921	4,820	3,784	2,676	2,987	4,568	7,512	9,246	9,828	12,753
	TOTAL OBS	2138	1950	2050	1890	2045	1889	1953	1957	1938	2035	1980	2045	23870
21-23	MEAN	44.3	46.9	51.2	58.6	66.0	71.6	73.8	73.6	69.9	60.8	51.1	45.2	59.2
	S D	10,497	9,827	9,161	7,405	5,114	3,846	2,535	2,902	4,913	8,302	10,067	10,514	13,407
	TOTAL OBS	2137	1949	2047	1890	2065	1890	1951	1952	1937	2036	1980	2042	23855
ALL HOURS	MEAN	45.3	47.5	51.7	58.9	66.2	71.9	74.3	74.0	70.2	61.4	52.2	46.0	59.8
	S D	11,219	10,614	9,878	7,945	5,707	4,381	3,000	3,297	5,204	8,523	10,330	11,048	13,521
	TOTAL OBS	17108	15596	16652	15364	16698	15427	15928	15945	15650	16287	15833	16339	192827

USAF ETAC FORM 0-89-5 (OL 1)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DEW-POINT TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

13824 — STATION
SAVANNAH GEORGIA/HUNTER AAF — STATION NAME
48-70 — YEARS

HRS (L.S.)		JAN	FEB	MAR	APR.	MAY	JUN	JUL	AUG.	SEP.	OCT.	NOV	DEC	ANNUAL
00-02	MEAN	39.7	41.9	46.3	54.4	62.9	69.0	71.7	71.6	67.6	57.8	47.3	40.0	55.6
	S D	13.232	12.766	12.407	9.836	6.525	4.477	2.811	3.107	5.889	9.891	12.200	13.370	15.517
	TOTAL OBS	2139	1930	2048	1889	2045	1890	1952	1953	1935	2036	1980	2041	23858
03-05	MEAN	38.9	41.1	45.4	53.3	61.8	68.1	71.0	70.8	66.8	56.4	46.1	39.1	54.7
	S D	13.445	13.214	12.713	10.075	6.871	4.697	2.753	3.084	6.081	10.187	12.379	13.623	15.669
	TOTAL OBS	2139	1930	2050	1890	2065	1916	1979	1979	1959	2036	1978	2040	23981
06-08	MEAN	38.3	40.8	45.5	53.8	62.5	68.8	71.6	71.2	66.9	56.3	45.8	38.6	54.9
	S D	13.603	13.456	12.851	10.333	7.053	4.796	2.840	3.276	6.424	10.330	12.489	13.588	16.026
	TOTAL OBS	2138	1949	2102	1939	2127	1968	2030	2033	1972	2037	1976	2042	24313
09-11	MEAN	40.3	42.2	45.6	53.6	62.3	69.0	72.3	71.9	67.9	58.4	48.1	40.8	56.0
	S D	14.219	14.135	13.857	11.628	7.611	5.293	3.049	3.496	6.364	10.238	13.132	14.029	16.016
	TOTAL OBS	2139	1949	2127	1963	2126	1968	2030	2030	1973	2037	1980	2044	24366
12-14	MEAN	40.7	42.1	45.0	52.8	61.4	68.5	71.8	71.3	67.5	58.0	47.9	41.3	55.6
	S D	14.864	14.701	14.361	11.885	8.000	5.765	3.419	3.753	6.173	10.459	13.383	14.603	16.095
	TOTAL OBS	2139	1949	2126	1964	2127	1953	2016	2019	1968	2036	1979	2042	24318
15-17	MEAN	41.0	42.2	45.3	53.1	61.8	68.8	72.1	71.6	67.7	58.3	48.2	41.6	55.9
	S D	14.598	14.045	13.925	11.654	7.803	5.564	3.487	3.896	6.044	10.286	13.160	14.616	15.938
	TOTAL OBS	2139	1950	2102	1939	2118	1953	2016	2022	1968	2034	1980	2043	24264
18-20	MEAN	41.1	43.0	46.3	54.3	63.2	69.4	72.4	72.1	68.5	59.4	49.0	42.2	56.5
	S D	13.442	12.598	12.667	10.841	6.837	4.866	3.076	3.564	5.668	9.268	12.050	13.176	15.306
	TOTAL OBS	2139	1950	2050	1890	2045	1889	1953	1957	1938	2035	1980	2049	23870
21-23	MEAN	40.4	42.7	47.0	55.3	63.8	69.8	72.3	72.2	68.2	58.7	47.9	41.3	56.4
	S D	13.086	12.377	12.021	9.928	6.283	4.346	2.815	3.301	5.763	9.540	12.248	13.029	15.324
	TOTAL OBS	2137	1948	2047	1890	2045	1890	1951	1952	1937	2036	1980	2042	23855
ALL HOURS	MEAN	40.1	42.0	45.8	53.8	62.5	68.9	71.9	71.6	67.6	57.9	47.5	40.6	55.7
	S D	13.855	13.449	13.148	10.837	7.199	5.038	3.017	3.475	6.081	10.080	12.677	13.814	15.752
	TOTAL OBS	17108	15595	16652	15364	16698	15427	15927	15945	15650	16287	15833	16339	192825

USAF ETAC FORM JUL 64 0-89-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) ALL (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JAN	ALL	100.0	99.8	97.0	91.6	83.7	72.8	59.2	42.7	20.4	72.4	17107
FEB		100.0	99.3	95.6	89.2	81.0	70.1	57.2	41.3	19.6	71.1	15594
MAR		100.0	98.9	93.9	85.6	75.8	65.0	52.8	39.0	18.5	68.7	16652
APR		100.0	99.4	94.8	87.9	78.7	66.9	54.2	39.9	16.8	69.5	15364
MAY		100.0	100.0	98.3	93.1	84.9	73.0	59.4	43.4	17.7	72.7	16697
JUN		100.0	100.0	99.7	97.4	91.6	80.2	64.0	45.6	14.6	75.0	15427
JUL		100.0	100.0	100.0	99.4	95.9	86.0	69.5	50.9	19.3	77.9	15926
AUG		100.0	100.0	100.0	99.4	95.7	84.5	68.7	51.8	20.2	77.8	15944
SEP		100.0	100.0	99.9	98.9	94.6	84.9	71.3	53.5	21.9	78.3	15649
OCT		100.0	100.0	99.1	95.8	89.1	79.4	66.9	50.2	22.2	76.0	16287
NOV		100.0	99.9	97.7	91.8	83.9	73.8	60.6	43.8	19.9	72.9	15833
DEC		100.0	99.7	97.0	91.3	82.9	71.4	57.1	40.1	18.3	71.5	16340
TOTALS		100.0	99.8	97.8	93.5	84.5	73.7	61.7	45.2	19.1	73.7	192820

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) JAN (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JAN	00-02	100.0	100.0	100.0	98.9	95.7	88.1	76.4	59.2	30.2	80.7	2139
	03-05	100.0	100.0	100.0	99.8	97.5	90.8	81.2	64.4	33.8	82.5	2139
	06-08	100.0	100.0	100.0	100.0	97.9	92.5	83.3	65.1	33.6	83.1	2138
	09-11	100.0	100.0	99.2	94.1	84.0	69.3	50.7	34.2	14.7	70.4	2139
	12-14	100.0	99.5	90.0	75.2	58.1	39.3	25.7	16.2	7.2	56.7	2138
	15-17	100.0	99.0	88.9	74.0	59.6	44.5	27.3	16.6	7.5	57.3	2139
	18-20	100.0	100.0	98.5	93.5	84.4	72.7	55.6	34.0	13.5	70.9	2138
	21-23	100.0	100.0	99.6	97.5	92.4	85.1	73.0	51.6	22.5	77.9	2137
TOTALS		100.0	99.8	97.0	91.6	83.7	72.8	59.2	42.7	20.4	72.4	17107

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) FEB (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L S T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
FEB	00-02	100.0	100.0	99.6	98.3	94.4	87.1	76.6	58.1	28.2	80.1	1950
	03-05	100.0	100.0	99.8	99.1	96.1	90.1	80.8	64.6	33.8	82.3	1949
	06-08	100.0	100.0	99.9	99.3	96.8	92.0	82.0	63.8	35.1	82.8	1949
	09-11	100.0	99.8	97.8	90.4	79.1	64.3	47.7	30.8	13.8	68.2	1949
	12-14	99.9	98.0	86.2	70.3	54.6	38.7	26.6	16.1	7.2	55.3	1949
	15-17	100.0	97.0	85.1	69.5	55.1	38.9	25.6	15.4	6.4	54.9	1950
	18-20	100.0	99.6	97.2	90.2	80.7	67.3	49.9	30.7	12.2	68.4	1949
	21-23	100.0	100.0	99.5	96.6	91.4	82.7	68.1	50.6	19.9	76.6	1949
TOTALS		100.0	99.3	95.6	89.2	81.0	70.1	57.2	41.3	19.6	71.1	15594

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) MAR (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
MAR	00-02	100.0	100.0	99.9	97.7	91.4	84.6	74.1	59.6	28.1	79.4	2048
	03-05	100.0	100.0	100.0	99.3	94.9	87.1	77.1	63.8	33.5	81.7	2050
	06-08	100.0	100.0	99.9	99.2	95.7	87.9	77.9	60.8	31.7	81.2	2102
	09-11	100.0	99.8	95.2	82.6	67.3	52.1	36.9	22.4	9.7	62.2	2127
	12-14	100.0	96.2	81.8	63.2	46.8	31.8	20.5	13.3	6.3	51.6	2126
	15-17	100.0	95.6	81.2	63.9	48.9	35.6	23.7	14.0	6.7	52.6	2102
	18-20	100.0	99.4	94.0	84.0	73.6	60.2	45.2	29.2	11.6	65.4	2050
	21-23	100.0	100.0	99.5	93.2	88.5	80.3	67.3	49.0	20.1	75.7	2047
TOTALS		100.0	98.9	93.9	85.6	75.8	65.0	52.8	39.0	18.5	68.7	16652

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-68,70 (PERIOD) APR (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
APR	00-02	100.0	100.0	99.8	98.6	95.7	90.2	81.9	68.1	30.0	82.3	1889
	03-05	100.0	99.9	99.8	99.3	97.2	93.0	85.6	73.4	40.5	84.7	1890
	06-08	100.0	100.0	99.7	99.0	96.1	89.3	80.1	64.2	29.0	81.6	1939
	09-11	100.0	99.5	95.4	83.3	66.0	48.8	29.7	15.1	4.3	60.0	1963
	12-14	100.0	98.3	85.0	68.5	48.2	28.3	14.9	8.0	3.3	50.9	1964
	15-17	100.0	97.9	85.0	71.0	54.0	34.4	18.7	8.6	2.9	52.7	1939
	18-20	100.0	99.3	95.0	87.1	78.0	65.0	46.9	25.9	6.6	66.0	1890
	21-23	100.0	99.9	99.0	96.5	92.3	85.8	76.0	56.0	17.7	76.9	1890
TOTALS		100.0	99.4	94.8	87.9	78.7	66.9	54.2	39.9	16.8	69.5	15364

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-70 (PERIOD) MAY (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L S T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40 ›	50%	60%	70%	80%	90%		
MAY	00-02	100.0	100.0	100.0	99.9	99.4	97.6	92.1	75.9	34.1	85.7	2045
	03-05	100.0	100.0	100.0	100.0	99.9	98.6	95.4	83.5	42.7	88.1	2065
	06-08	100.0	100.0	100.0	100.0	99.0	95.5	85.5	65.4	26.9	83.0	2127
	09-11	100.0	100.0	99.2	93.2	77.4	53.4	27.9	12.2	3.4	62.2	2126
	12-14	100.0	100.0	94.1	76.3	54.3	30.5	15.5	8.6	3.5	53.9	2127
	15-17	100.0	99.9	93.7	80.4	62.3	40.6	21.0	10.8	4.1	56.8	2118
	18-20	100.0	100.0	99.0	95.2	87.9	74.2	52.9	28.1	7.4	70.0	2046
	21-23	100.0	100.0	100.0	99.0	98.6	93.8	84.6	62.4	19.3	81.5	2043
TOTALS		100.0	100.0	98.3	93.1	84.9	73.0	59.4	43.4	17.7	72.7	16697

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) JUN (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L S T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUN	00-02	100.0	100.0	100.0	100.0	99.9	99.4	96.3	82.9	27.8	86.5	1890
	03-05	100.0	100.0	100.0	100.0	100.0	99.7	97.8	90.6	40.2	88.9	1916
	06-08	100.0	100.0	100.0	100.0	99.8	97.9	90.6	70.4	20.7	83.8	1968
	09-11	100.0	100.0	99.9	98.4	89.3	66.9	36.1	9.7	1.9	69.6	1968
	12-14	100.0	100.0	99.2	91.1	71.0	41.4	14.9	6.2	1.9	58.1	1953
	15-17	100.0	100.0	98.7	91.8	78.6	54.9	25.1	12.2	3.1	62.0	1953
	18-20	100.0	100.0	99.8	98.0	94.2	83.3	59.9	27.8	7.6	72.7	1889
	21-23	100.0	100.0	100.0	100.0	99.6	97.9	93.3	64.7	13.4	82.5	1890
TOTALS		100.0	100.0	99.7	97.4	91.6	80.2	64.0	45.6	14.6	75.0	15427

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) JUL (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUL	00-02	100.0	100.0	100.0	100.0	100.0	100.0	98.8	86.1	36.3	88.1	1952
	03-05	100.0	100.0	100.0	100.0	100.0	100.0	99.6	95.0	47.4	90.4	1979
	06-08	100.0	100.0	100.0	100.0	100.0	99.4	96.6	78.2	26.8	86.1	2030
	09-11	100.0	100.0	100.0	99.7	96.9	82.0	41.7	14.0	3.4	69.3	2030
	12-14	100.0	100.0	99.9	97.7	84.0	48.8	18.3	7.2	2.6	61.4	2015
	15-17	100.0	100.0	100.0	97.6	88.3	65.3	32.6	16.4	6.2	66.2	2016
	18-20	100.0	100.0	100.0	99.8	97.8	92.8	71.6	36.2	10.3	76.6	1953
	21-23	100.0	100.0	100.0	100.0	100.0	99.8	96.4	72.4	21.0	84.7	1951
TOTALS		100.0	100.0	100.0	99.4	95.9	86.0	69.5	50.9	19.3	77.9	15926

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 49-69 (PERIOD) AUG (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
AUG	00-02	100.0	100.0	100.0	100.0	100.0	99.7	98.6	89.8	35.7	88.4	1953
	03-05	100.0	100.0	100.0	100.0	100.0	100.0	99.5	95.4	49.4	90.7	1979
	06-08	100.0	100.0	100.0	100.0	100.0	99.9	97.4	82.8	33.9	87.4	2033
	09-11	100.0	100.0	100.0	99.7	96.8	80.6	42.0	14.3	3.5	69.3	2030
	12-14	100.0	100.0	99.9	97.8	83.5	43.0	16.8	8.3	3.7	60.8	2019
	15-17	100.0	100.0	99.7	98.0	87.0	60.0	28.0	13.3	4.8	64.7	2022
	18-20	100.0	100.0	100.0	99.8	98.7	93.6	71.8	35.7	9.5	76.4	1957
	21-23	100.0	100.0	100.0	100.0	99.9	99.5	95.8	75.0	20.9	84.9	1951
TOTALS		100.0	100.0	100.0	99.4	95.7	84.5	68.7	51.8	20.2	77.8	15944

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) SEP (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
SEP	00-02	100.0	100.0	100.0	100.0	99.9	99.0	96.1	84.8	37.3	87.8	1935
	03-05	100.0	100.0	100.0	100.0	100.0	98.9	97.1	89.0	47.5	89.4	1959
	06-08	100.0	100.0	100.0	100.0	99.8	98.6	95.2	82.1	37.7	87.5	1971
	09-11	100.0	100.0	99.9	99.1	94.6	79.9	52.5	25.2	6.6	71.3	1973
	12-14	100.0	100.0	99.5	95.8	80.3	51.4	25.9	13.2	3.5	62.5	1968
	15-17	100.0	100.0	99.7	96.5	83.8	60.8	35.0	17.0	5.7	65.3	1968
	18-20	100.0	100.0	100.0	99.6	98.6	91.8	75.6	43.8	11.7	77.7	1938
	21-23	100.0	100.0	100.0	100.0	99.9	98.8	92.8	72.8	25.2	84.7	1937
TOTALS		100.0	100.0	99.9	98.9	94.6	84.9	71.3	53.5	21.9	78.3	15649

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) OCT (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
OCT	00-02	100.0	100.0	100.0	99.8	99.2	97.2	92.5	78.4	40.9	86.7	2036
	03-05	100.0	100.0	100.0	100.0	99.4	97.9	93.9	82.3	45.6	88.0	2036
	06-08	100.0	100.0	100.0	100.0	99.4	97.1	92.0	78.2	37.9	86.5	2037
	09-11	100.0	100.0	99.7	96.7	87.0	69.0	47.2	25.8	7.1	68.9	2037
	12-14	100.0	99.8	96.3	85.1	63.9	41.3	22.8	11.3	3.8	57.9	2036
	15-17	100.0	99.8	96.9	86.0	68.5	47.9	27.0	13.6	4.8	59.9	2034
	18-20	100.0	100.0	99.9	99.1	96.8	88.5	71.0	42.1	12.1	76.4	2035
	21-23	100.0	100.0	100.0	99.8	98.8	96.4	88.7	69.8	25.4	83.7	2036
TOTALS		100.0	100.0	99.1	93.8	89.1	79.4	66.9	50.2	22.2	76.0	16287

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) NOV (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L S T)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
NOV	00-02	100.0	100.0	99.8	99.0	97.6	93.0	84.2	66.6	33.0	83.2	1980
	03-05	100.0	100.0	99.9	99.6	98.4	95.3	86.9	70.7	38.8	84.8	1978
	06-08	100.0	100.0	99.9	99.7	98.7	95.4	85.7	68.0	35.3	84.3	1976
	09-11	100.0	100.0	98.8	92.6	79.8	62.1	43.7	25.2	8.4	66.6	1980
	12-14	100.0	99.9	91.6	72.6	53.4	34.0	18.8	9.3	3.4	53.8	1979
	15-17	100.0	99.6	92.3	75.3	58.2	41.8	25.1	11.8	4.3	56.3	1980
	18-20	100.0	100.0	99.4	96.9	89.9	79.3	62.4	39.7	11.6	73.6	1980
	21-23	100.0	100.0	99.9	98.4	95.3	89.1	77.8	59.2	24.6	80.2	1980
TOTALS		100.0	99.9	97.7	91.8	83.9	73.8	60.6	43.8	19.9	72.9	15833

USAFETAC FORM JUL 64 0-87-5 (OL 1)

DATA PROCESSING DIVISION
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

13824 (STATION) SAVANNAH GEORGIA/HUNTER AAF (STATION NAME) 48-69 (PERIOD) DEC (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
DEC	00-02	100.0	100.0	100.0	99.1	95.5	88.1	73.9	54.7	26.2	79.6	2041
	03-05	100.0	100.0	100.0	99.7	97.3	90.5	78.1	58.1	28.5	81.1	2040
	06-08	100.0	100.0	100.0	99.7	97.4	91.8	79.6	59.6	29.0	81.6	2042
	09-11	100.0	100.0	98.9	92.6	80.3	63.7	46.8	30.8	13.1	68.4	2044
	12-14	100.0	98.8	89.6	72.0	55.1	36.6	23.3	14.5	6.3	55.2	2042
	15-17	100.0	98.4	88.9	72.7	56.9	42.7	29.3	17.1	6.5	56.9	2043
	18-20	100.0	100.0	99.2	95.4	86.2	72.8	55.8	36.6	14.0	71.6	2045
	21-23	100.0	100.0	99.7	98.8	94.1	84.7	70.0	49.3	22.8	77.8	2043
TOTALS		100.0	99.7	97.0	91.3	82.9	71.4	57.1	40.1	18.3	71.5	16340

USAFETAC FORM JUL 64 0-87-5 (OL 1)

[illegible] DIVISION
ET[illegible]
AIR[illegible]ER SERVICE (MAC)
ASHEVILLE, NORTH CAROLINA


PART F PRESSURE SUMMARY

Presented in this part are two tables giving the means, standard deviations, and total number of observations of station pressure and sea-level pressure by months and annual for the local hourly observations corresponding to the eight 3-hourly synoptic times GCT. The same computations are also provided at the bottom of the page for all hours combined. All years of data available are combined in both of these tables, although the overall period is limited to January 1946 through December 1963 because of changes in reporting practices before and after those dates.

1. Station pressure in inches of mercury.

2. Sea-level pressure in millibars.

Provided below is a scale to convert station pressure values in inches of mercury or millibars to pressure altitude in 1000's of feet. This scale is an enlarged model of the pressure altitude scale in the Smithsonian Meteorological Tables.

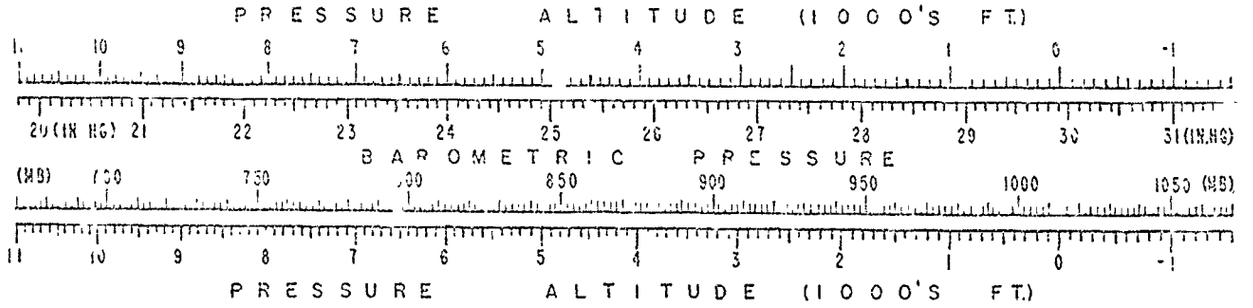

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

STATION PRESSURE IN INCHES HG FROM HOURLY OBSERVATIONS

13824 — STATION
SAVANNAH GEORGIA/HUNTER AAF — STATION NAME
68-70 — YEARS

HRS (L S T)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG.	SEP	OCT	NOV.	DEC	ANNUAL
01	MEAN	30.089	30.043	29.995	29.982	29.959	29.938	29.979	29.951	29.957	29.991	30.037	30.084	30.002
	S. D.	.187	.194	.173	.169	.128	.105	.088	.095	.114	.142	.166	.173	.157
	TOTAL OBS	713	650	682	630	682	630	651	651	645	679	657	679	7949
04	MEAN	30.084	30.032	29.977	29.965	29.943	29.919	29.965	29.936	29.942	29.978	30.029	30.078	29.989
	S. D.	.191	.195	.173	.169	.127	.103	.087	.096	.111	.141	.167	.176	.159
	TOTAL OBS	651	593	621	570	620	570	618	619	622	648	627	651	7410
07	MEAN	30.105	30.053	30.018	30.014	29.986	29.959	29.998	29.970	29.976	30.010	30.059	30.101	30.021
	S D.	.193	.201	.176	.169	.129	.103	.089	.096	.115	.146	.169	.177	.159
	TOTAL OBS	713	649	709	655	709	656	677	678	658	679	656	681	8120
10	MEAN	30.144	30.088	30.043	30.029	29.995	29.969	30.014	29.990	29.999	30.035	30.085	30.133	30.044
	S D.	.198	.204	.180	.173	.134	.105	.090	.097	.117	.146	.173	.179	.164
	TOTAL OBS	651	593	647	594	647	596	643	647	628	648	626	650	7370
13	MEAN	30.083	30.038	30.002	29.997	29.970	29.947	29.988	29.962	29.969	29.990	30.032	30.076	30.005
	S D.	.198	.205	.181	.173	.137	.108	.091	.099	.123	.149	.174	.179	.162
	TOTAL OBS	713	649	709	655	709	651	672	674	656	679	657	681	8105
16	MEAN	30.060	30.003	29.959	29.949	29.929	29.907	29.954	29.926	29.935	29.962	30.006	30.051	29.971
	S D.	.198	.203	.178	.175	.139	.107	.091	.099	.120	.147	.173	.178	.162
	TOTAL OBS	651	593	647	594	643	591	639	643	626	647	627	651	7552
19	MEAN	30.088	30.025	29.975	29.963	29.945	29.922	29.961	29.934	29.947	29.984	30.037	30.080	29.989
	S D	.191	.199	.174	.172	.131	.107	.091	.096	.117	.144	.167	.176	.161
	TOTAL OBS	713	650	684	630	682	630	651	651	646	678	657	681	7953
22	MEAN	30.105	30.049	30.000	29.988	29.969	29.944	29.989	29.963	29.974	30.004	30.053	30.092	30.012
	S D.	.192	.195	.174	.171	.129	.104	.087	.096	.114	.141	.168	.175	.158
	TOTAL OBS	651	593	620	570	620	570	617	620	616	643	627	649	7401
ALL HOURS	MEAN	30.095	30.041	29.996	29.986	29.962	29.938	29.981	29.954	29.962	29.994	30.042	30.087	30.004
	S D.	.195	.201	.178	.173	.133	.107	.091	.099	.118	.146	.171	.178	.162
	TOTAL OBS	5496	4972	5319	4898	5312	4894	5168	5183	5097	5306	5134	5323	62060

USAF ETAC FORM JUL 64 0-89-5 (OL 1)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

STATION PRESSURE IN INCHES HG FROM HOURLY OBSERVATIONS

13824 — STATION
SAVANNAH GEORGIA/HUNTER AAF — STATION NAME
48-70 — YEARS

HRS (LST)		JAN	FEB.	MAR	APR	MAY	JUN	JUL.	AUG.	SEP.	OCT.	NOV	DEC	ANNUAL
01	MEAN	30.089	30.043	29.995	29.982	29.959	29.938	29.979	29.951	29.957	29.991	30.037	30.084	30.002
	S D	.187	.194	.173	.169	.128	.105	.088	.095	.114	.142	.166	.173	.157
	TOTAL OBS	713	650	682	630	682	630	651	651	645	679	657	679	7949
04	MEAN	30.084	30.032	29.977	29.965	29.943	29.919	29.965	29.936	29.942	29.978	30.029	30.078	29.989
	S D	.191	.195	.173	.169	.127	.103	.087	.096	.111	.141	.167	.176	.159
	TOTAL OBS	651	593	621	570	620	570	618	619	622	648	627	651	7410
07	MEAN	30.105	30.053	30.016	30.014	29.986	29.959	29.998	29.970	29.976	30.010	30.059	30.101	30.021
	S D	.193	.201	.176	.168	.129	.103	.089	.096	.115	.146	.169	.177	.159
	TOTAL OBS	713	649	709	655	709	656	677	678	658	679	656	681	8120
10	MEAN	30.144	30.088	30.043	30.029	29.995	29.969	30.014	29.990	29.999	30.035	30.085	30.133	30.044
	S D	.198	.204	.180	.173	.134	.105	.090	.097	.117	.146	.173	.179	.164
	TOTAL OBS	651	593	647	594	647	596	643	647	628	648	626	650	7570
13	MEAN	30.083	30.038	30.002	29.997	29.970	29.947	29.988	29.962	29.969	29.990	30.032	30.076	30.005
	S.D	.198	.205	.181	.173	.137	.108	.091	.099	.123	.149	.174	.179	.162
	TOTAL OBS	713	649	709	655	709	651	672	674	656	679	657	681	8105
16	MEAN	30.060	30.003	29.959	29.949	29.929	29.907	29.954	29.926	29.935	29.962	30.006	30.051	29.971
	S.D	.198	.203	.178	.175	.139	.107	.091	.099	.120	.147	.173	.178	.162
	TOTAL OBS	651	593	647	594	643	591	639	643	626	647	627	651	7552
19	MEAN	30.088	30.025	29.975	29.963	29.945	29.922	29.961	29.934	29.947	29.984	30.037	30.080	29.989
	S D.	.191	.199	.174	.172	.131	.107	.091	.096	.117	.144	.167	.176	.161
	TOTAL OBS	713	650	684	630	682	630	651	651	646	678	657	681	7953
22	MEAN	30.105	30.049	30.000	29.988	29.969	29.944	29.989	29.963	29.974	30.004	30.053	30.092	30.012
	S D	.192	.195	.174	.171	.129	.104	.087	.096	.114	.141	.168	.175	.158
	TOTAL OBS	651	593	620	570	620	570	617	620	616	648	627	649	7401
ALL HOURS	MEAN	30.095	30.041	29.996	29.986	29.962	29.938	29.981	29.954	29.962	29.994	30.042	30.087	30.004
	S D	.195	.201	.178	.173	.133	.107	.091	.099	.118	.146	.171	.178	.162
	TOTAL OBS	5456	4970	5319	4898	5312	4894	5168	5183	5097	5306	5134	5323	62060

USAF ETAC FORM JUL 64 0-89-5 (OL 1)

DATA PROCESSING DIVISION
USAF ETAC
AIR WEATHER SERVICE/MAC

3

MEANS AND STANDARD DEVIATIONS

SEA LEVEL PRESSURE IN MBS FROM HOURLY OBSERVATIONS

13824 — STATION
SAVANNAH GEORGIA/HUNTER AAF — STATION NAME
48-70 — YEARS

HRS (L.S.T.)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
01	MEAN	1020.7	1019.1	1017.5	1017.0	1016.3	1015.5	1016.9	1016.0	1016.2	1017.3	1018.9	1020.5	1017.7
	S D	6.743	6.581	5.866	5.717	4.349	3.548	2.989	3.228	3.871	4.798	5.626	5.878	5.334
	TOTAL OBS	713	650	683	630	682	630	651	651	645	679	660	676	7952
04	MEAN	1020.5	1018.6	1016.9	1016.6	1015.9	1015.1	1016.4	1015.4	1015.7	1016.9	1018.7	1020.4	1017.3
	S D	6.411	6.660	5.864	5.675	4.301	3.518	2.977	3.270	3.844	4.840	5.644	5.974	5.390
	TOTAL OBS	713	650	683	630	682	630	651	650	652	679	660	682	7962
07	MEAN	1021.2	1019.4	1018.2	1018.1	1017.2	1016.2	1017.6	1016.6	1016.8	1018.0	1019.6	1021.1	1018.4
	S D	6.561	6.821	5.973	5.716	4.377	3.512	2.999	3.249	3.883	4.932	5.727	5.997	5.385
	TOTAL OBS	713	649	709	655	709	656	677	678	658	679	659	681	8123
10	MEAN	1022.5	1020.5	1019.1	1018.8	1017.6	1016.9	1018.1	1017.3	1017.6	1018.8	1020.6	1022.3	1019.2
	S D	6.662	6.964	6.128	5.789	4.511	3.609	3.069	3.296	4.024	5.015	5.841	6.036	5.555
	TOTAL OBS	713	650	709	654	709	656	676	678	658	679	660	680	8122
13	MEAN	1020.5	1018.9	1017.7	1017.5	1016.6	1015.8	1017.2	1016.3	1016.6	1017.3	1018.7	1020.2	1017.8
	S D	6.730	6.966	6.134	5.860	4.629	3.651	3.078	3.368	4.150	5.055	5.915	6.079	5.490
	TOTAL OBS	713	649	709	655	709	651	672	674	656	679	660	681	8108
16	MEAN	1019.7	1017.6	1016.3	1016.1	1015.4	1014.7	1016.1	1015.1	1015.4	1016.4	1017.9	1019.5	1016.7
	S D	6.640	6.929	6.055	5.906	4.669	3.681	3.098	3.343	4.126	5.030	5.840	6.042	5.504
	TOTAL OBS	713	650	709	654	705	651	672	674	656	678	660	682	8104
19	MEAN	1020.6	1018.5	1016.8	1016.4	1015.7	1015.0	1016.3	1015.4	1015.8	1017.1	1018.9	1020.4	1017.3
	S D	6.512	6.756	5.939	5.839	4.492	3.636	3.069	3.260	3.976	4.870	5.678	5.978	5.483
	TOTAL OBS	713	650	684	630	682	630	651	651	645	678	660	681	7955
22	MEAN	1021.2	1019.2	1017.7	1017.4	1016.7	1015.9	1017.3	1016.4	1016.8	1017.8	1019.5	1020.9	1018.1
	S D	6.409	6.682	5.881	5.744	4.366	3.565	2.979	3.244	3.931	4.835	5.650	5.947	5.370
	TOTAL OBS	713	650	682	630	682	630	650	651	645	679	660	681	7953
ALL HOURS	MEAN	1020.9	1019.0	1017.5	1017.2	1016.4	1015.6	1017.0	1016.1	1016.4	1017.5	1019.1	1020.6	1017.8
	S D	6.576	6.836	6.037	5.841	4.514	3.649	3.099	3.352	4.032	4.968	5.786	6.035	5.486
	TOTAL OBS	5704	5198	5568	5138	5560	5134	5300	5307	5215	5430	5279	5446	64279

USAF ETAC FORM JUL 64 0-89-5 (CL 1)