

AD-A075 443

DAYTON UNIV OH RESEARCH INST
1977 ROBIN PROGRAM - USER'S MANUAL.(U)
JUL 79 J F MYERS, J K LUERS

F/G 4/1

UNCLASSIFIED

DAAD07-78-C-0020
ERADCOM/ASL-CR-79-0020-1 NL

OF
AD
A075443





MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

ASL-CR-79-0020-1

AD

Reports Control Symbol
OSD 1366

ADA075443

LEVEL IV

1977 ROBIN PROGRAM - USER'S MANUAL

JULY 1979

DDC
RECEIVED
OCT 22 1979
E

Prepared by

**JOHN F. MYERS
JAMES K. LUERS**

University of Dayton
Research Institute
Dayton, Ohio 45469

Under Contract DAAD07-78-C0020

Contract Monitor: Robert Olsen

Approved for public release; distribution unlimited

DDC FILE COPY.



US Army Electronics Research and Development Command
ATMOSPHERIC SCIENCES LABORATORY
White Sands Missile Range, NM 88002

79 10 19 065

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

Disposition

Destory this report when it is no longer needed. Do not return it to the originator.

18 ERADCOM/ASL

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

19 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ASL-CR-79-0020-1	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) 6 1977 ROBIN PROGRAM - USER'S MANUAL.	5. TYPE OF REPORT & PERIOD COVERED 9 Technical Report	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) 10 John F. Myers James K. Luers	8. CONTRACT OR GRANT NUMBER(s) DAAD07-78-C0020	
9. PERFORMING ORGANIZATION NAME AND ADDRESS University of Dayton Research Institute Dayton, Ohio 45469	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DA Task No. 16 1L162111AH71	
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Electronics Research and Development Command Adelphi, MD 20783	12. REPORT DATE 11 July 1979	13. NUMBER OF PAGES 38 12/42
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Atmospheric Sciences Laboratory White Sands Missile Range, NM 88002	15. SECURITY CLASS. (of this report) UNCLASSIFIED	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited 15 DAAD07-78-C-0020		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Contract Monitor: Robert Olsen		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Robin Temperature Inflatable sphere Winds Mesosphere Density		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The Robin 77 or revised High Altitude Robin Program is specifically designed for computer reduction of Robin flights which attain an apogee of approximately 125 km, and are tracked by an FPS/16 radar. The program also provides accurate reduction for Robin flights attaining other apogees between 65 and 150 km. If a passive sphere other than the 1-m Robin (approximately 115 g) is used, reduction with this program is still possible. There may be times, however, when drag coefficients are not available and thus density, temperature,		

CONT →

105 400

JOB

20. ABSTRACT (cont)

cont → and pressure cannot be computed. The time of fall test used to determine sphere collapse is not used for spheres with dimensions that differ from the Robin.

At each second of flight, the program calculates altitude, wind components and direction, density, temperature, and pressure, the RMS noise error in winds, density, temperature and pressure, and other balloon dynamics. ↗

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1	1
DESCRIPTION OF 1977 ROBIN PROGRAM	
Removal of Supersonic and Mach 1 Bias	1
Drag Table	3
1976 Standard Atmosphere	5
RMS Errors	5
Gravitational Constant	5
Comparison of Output	9
2	11
PURPOSE AND USE OF PROGRAM	
3	13
OPERATING INSTRUCTIONS	
4	22
DATA INTERPRETATION	
Apogee Determination	22
Sphere Collapse	22
a) Time of Fall Test	22
b) Density Gradient Test (λ Check)	22
Density Errors	24
a) Noise Error in Density	25
b) Bias Errors in Density	25
c) Initial Guess of T	25
d) Drag Coefficient Errors	25
e) Vertical Winds	27
Pressure Errors	27
a) Noise Error in Pressure	27
b) Bias Errors in Pressure	27
Temperature Errors	29
a) Noise Error in Temperature	29
Frequency Response of Thermodynamic Data	31
Wind Errors	31
Frequency Response of Wind Data	31
REFERENCES	36

Accession For		<input checked="" type="checkbox"/>
NTIS GR&I		<input type="checkbox"/>
DDC TAB		<input type="checkbox"/>
Unannounced		<input type="checkbox"/>
Justification		
By _____		
Distribution/ _____		
Availability Codes		
Dist.	Avail and/or	
	special	
A		

LIST OF FIGURES

FIGURE NO.		PAGE
1	1977 ROBIN Program	2
2	Typical Bias Error	4
3	1977 ROBIN Program: Drag Table	6
4	Comparison: 1977 ROBIN vs. 1972 HIROBIN	10
5	ROBIN Position Edit of Tape 1877	14
6	University of Dayton 1977 ROBIN Program (Actual Data)	17
7	University of Dayton 1977 ROBIN Program (Data Interpolated Every 200 meters)	18
8	University of Dayton 1977 ROBIN Program (Data Interpolated Every Km)	19
9	Typical Deck Setup	21

LIST OF TABLES

TABLE NO.		PAGE
1	Time of Fall in Seconds through Standard Atmosphere and + 20% Deviations from Standard for Sphere Apogees Between 70 and 150 Km	23
2	Percent Error in Density from Various Sources for Sphere with Apogee 115 Km	26
3	Percent Error in Pressure for Sphere with Apogee 115 Km	28
4	Degree Error in Temperature for Sphere with Apogee 115 Km	30
5	Frequency Response of Thermodynamic Data	32
6	Noise Error in Wind Component for a Sphere with Apogee 115 Km	33
7	Frequency Reseponse of Wind Data	34

SECTION 1
DESCRIPTION OF 1977 ROBIN PROGRAM

104
The 1977 ROBIN program is an update of the April 1972 HIROBIN program. The 1977 program contains several changes from the 1972 version. The changes were made in order to eliminate the Mach 1 and supersonic bias, to extend and modify the drag table so that the temperatures of sphere and Datasonde flights were in agreement, to improve the method of calculating RMS wind and thermodynamic errors, to improve the first guess at temperature, and to standardize input constants. A discussion of the changes made and how they were incorporated into the 1977 ROBIN program is contained in the following paragraphs.

Removal of Supersonic and Mach 1 Bias

The 1977 ROBIN program is designed to remove both the supersonic and Mach 1 bias in all parameters - density, pressure, temperature, and winds. The technique used to remove bias is to simulate the bias by a theoretical trajectory and then subtract this bias from the standard ROBIN output. Thus the 1977 ROBIN (with respect to bias error removal) is essentially the 1972 HIROBIN with additional subroutines to calculate and subtract the bias error. Details are as follows (see Figure 1). The editing program and the descending altitude subroutine which determines where data processing of the flight begins have not been changed in the 1977 program. An initial position and velocity of the sphere, however, are calculated from the radar data immediately after the determination of five consecutive descending altitudes. From this initial position and velocity, a theoretical sphere trajectory is generated by assuming the sphere fell in the 1976 Standard Atmosphere with no winds present. The theoretical trajectory is terminated at 60 Km since both Mach 1 and supersonic bias occur above this altitude. The theoretical profile of (t,X,Y,Z) coordinates is then treated as if it represented radar coordinates. Logic of the 1972 HIROBIN program with the

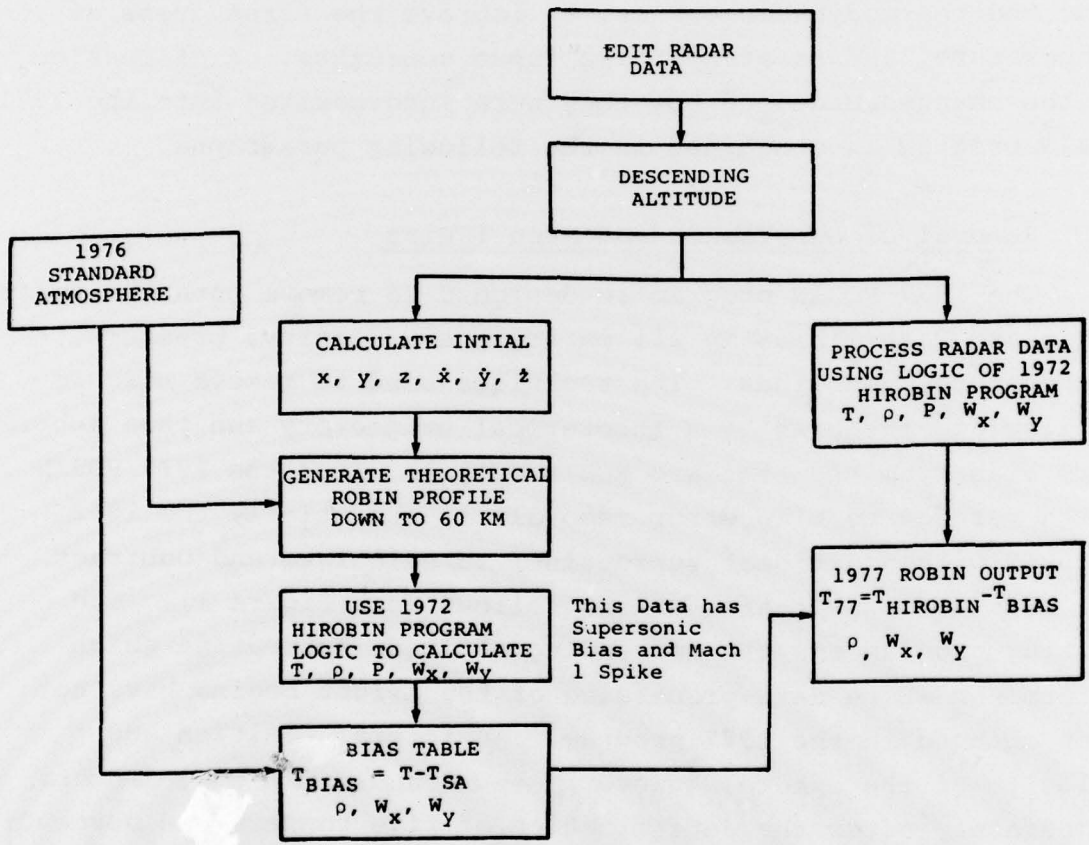


Figure 1. 1977 ROBIN Program

19-21, 51-35 filters is used to generate atmospheric parameters of winds, temperature, density, and pressure from the theoretical trajectory. Any differences between the computed parameters and the 1976 Standard Atmosphere values are the bias errors resulting from the filters. These differences in density, temperature, and winds are stored in a bias correction array. Bias errors in pressure are not stored since using the ideal gas law, pressure can be determined directly from temperature and density measurements. After generation of the bias correction table, processing of the radar data continues in the same manner as was done in the 1972 HIROBIN program. The 1977 output is obtained by subtracting the bias correction table from the radar processed data. The correction is applied by interpolation of the bias error table at each altitude where processed tracking data occurs - except for altitudes between Mach 1.3 and Mach .85. During this region, where the Mach 1 spike occurs, the bias correction table is interpolated based on Mach number.

A feature of the bias removal procedure is its ability to remove both the supersonic bias and Mach 1 spike. Examples of typical bias errors appear in Figure 2.

Drag Table

The drag table used in the 1977 ROBIN program is an extended and modified version of the Bailey and Hiatt drag table used in the 1972 HIROBIN. The drag table was extended in the region adjacent to Mach 2 and Reynolds Number 1600 so that those high apogee flights that in the past went out of the drag table would remain within given drag values. These extended drag coefficients were obtained from Bailey and Hiatt's ballistic sphere measurements [1].

Changes were made to the subsonic drag coefficients between Mach 0 and 0.5 and Reynolds Numbers between 5000 and 35,000. The purpose of these changes, as explained in Reference 2, was to bring sphere temperature measurements into agreement with Datasonde measurements in the region between 32 and 58 Km.

ALT (m)	MACH#	WE (m/sec)	WN (m/sec)	DENSITY (g/m ³)	TEMP (°k)
98435.252145	2.635502	-6.370531	2.556609	.00000003	0.000000
97724.551015	2.721445	-5.377135	2.402351	.00000004	-1.24353
97005.034952	2.732645	-5.752549	2.183636	.00000004	-1.395935
96290.067575	2.733144	-5.136233	1.936902	.00000004	.012454
95575.730024	2.807399	-4.431017	1.670590	.00000005	-1.115657
94904.559454	2.842493	-3.700956	1.353965	.00000006	-1.276016
94035.759905	2.872673	-2.968973	1.115804	.00000006	-2.112291
93305.756115	2.882304	-2.255563	.844031	.00000009	-1.350173
92543.033552	2.912352	-1.577353	.565133	.00000010	-2.051592
91744.137772	2.930671	-.946755	.344070	.00000013	-2.332711
91015.742484	2.947659	-.372705	.124447	.00000016	-2.953475
90283.409411	2.965076	.139095	-.071320	.00000013	-2.720051
89447.962302	2.983112	.565463	-.241513	.00000029	-2.132337
88622.237433	2.996305	.965226	-.366449	.00000023	-1.799863
87911.336405	2.945553	1.278324	-.505276	.00000024	-1.716141
87132.304253	2.923609	1.528035	-.556356	.00000022	.757957
86354.344323	2.909546	1.715455	-.668365	.00000029	2.043479
85576.432484	2.847554	1.845056	-.715235	.00000021	2.083890
84807.165244	2.955166	1.921404	-.741230	.00000022	2.139649
84040.422933	2.812320	1.949741	-.748292	.00000018	2.554337
83281.359327	2.785493	1.933735	-.739367	.00000013	3.754350
82530.445214	2.715499	1.979129	-.713354	.00000008	4.281823
81753.741437	2.662900	1.789395	-.675195	.00000004	-4.439206
81040.443545	2.617178	1.671323	-.625672	.00000001	4.232369
80345.208462	2.548195	1.528210	-.567713	.00000000	3.915131
79644.551336	2.482374	1.368271	-.503081	.00000004	3.822123
78940.036407	2.408231	1.195450	-.434263	.00000019	4.655410
78227.237320	2.321333	1.015403	-.363425	.00000036	5.332569
77545.358105	2.234347	.833255	-.292336	.00000050	5.545744
77017.242236	2.175617	.652262	-.222532	.00000063	5.496977
76403.514162	2.097712	.475563	-.155222	.00000075	5.387361
75923.471213	2.017436	.305577	-.091350	.00000090	5.303520
75253.625735	1.924556	.144040	-.031562	.00000091	-4.439379
74715.235613	1.844133	-.007407	.023627	.00000099	-1.065495
74193.151429	1.765456	-.149136	.074006	.00000132	3.443546
73592.012503	1.743533	-.279373	.113403	.00000030	1.972036
73211.143021	1.654942	-.397747	.153650	.00000061	.716095
72745.464227	1.573657	-.503320	.194560	.00000101	1.353512
72307.559021	1.503365	-.595146	.223961	.00000032	1.254562
71853.263564	1.443353	-.671742	.247623	.00000101	1.225149
71475.115395	1.383062	-.732576	.265517	.00000104	1.013533
71045.125046	1.325503	-.777810	.277660	.00000106	.826599

Figure 2. Typical Bias Error

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

The drag table used in the 1977 ROBIN program is shown in Figure 3.

1976 Standard Atmosphere

The calculation of pressure and temperature in the ROBIN program requires a first guess of temperature (usually near 95 Km). In the 1972 HIROBIN program the initial temperature was obtained from the 1962 Standard Atmosphere. In the 1977 ROBIN, the first guess is taken from the 1976 Standard Atmosphere. The 1976 Standard Atmosphere is also used in the 1977 ROBIN program for the generation of the theoretical trajectory from which the supersonic and Mach 1 bias correction table is generated.

RMS Errors

The equation used in the 1972 HIROBIN program to estimate the radar error failed to take into account the correlation in velocities introduced by the filtering process. Consequently, the error estimates were too small by fifty percent or more at the higher altitudes. Reference 3 discusses the correlated error problem and provides an equation for estimating the influence of the correlated errors. The 1977 ROBIN has been modified to include the correlated error term. Thus, assuming that the FPS/16 radar performs according to specifications, the 1977 ROBIN will provide an accurate estimate of wind and thermodynamic errors arising from the radar track.

Gravitational Constant

To maintain consistency with other programs used in the reduction of meteorological data, the equation used to calculate the gravitational constant in the 1977 ROBIN program is

$$G_S = -9.780356 \left(1 + 5.2885 \times 10^{-5} (\sin^2(\phi)) - 5.9 \times 10^{-8} (\sin^2(2\phi)) \right),$$

where ϕ is latitude. No discernable change in thermodynamic or wind data output results from the modification of the gravitational constant.

URAC TABLE (AUG 1977)

MACH	REYNOLDS NUMBER														
	10.	20.	30.	40.	50.	75.	100.	150.	200.	300.	400.	500.	600.	800.	1000.
4.60	1.673	1.604	1.535	1.491	1.449	1.384	1.342	1.289	1.250	1.199	1.171	1.142	1.132	1.104	1.075
4.40	1.683	1.612	1.541	1.491	1.452	1.392	1.347	1.292	1.252	1.200	1.171	1.144	1.134	1.106	1.078
4.20	1.697	1.622	1.547	1.495	1.458	1.400	1.352	1.298	1.254	1.202	1.171	1.147	1.136	1.108	1.080
4.00	1.720	1.640	1.555	1.503	1.463	1.410	1.358	1.302	1.259	1.207	1.175	1.150	1.138	1.110	1.082
3.80	1.749	1.658	1.567	1.519	1.473	1.420	1.366	1.310	1.266	1.212	1.184	1.157	1.141	1.111	1.082
3.60	1.780	1.680	1.580	1.533	1.485	1.430	1.375	1.319	1.275	1.220	1.192	1.163	1.149	1.122	1.095
3.40	1.809	1.703	1.597	1.548	1.498	1.444	1.390	1.330	1.287	1.230	1.201	1.173	1.158	1.130	1.101
3.20	1.841	1.728	1.615	1.564	1.512	1.456	1.400	1.341	1.298	1.242	1.214	1.186	1.170	1.140	1.109
3.00	1.870	1.753	1.636	1.582	1.528	1.471	1.414	1.355	1.310	1.257	1.227	1.196	1.179	1.146	1.113
2.80	1.903	1.780	1.657	1.601	1.545	1.487	1.429	1.368	1.322	1.270	1.237	1.203	1.186	1.153	1.120
2.60	1.941	1.810	1.679	1.621	1.562	1.502	1.442	1.382	1.337	1.282	1.246	1.210	1.192	1.157	1.122
2.50	1.958	1.825	1.692	1.632	1.572	1.511	1.450	1.390	1.342	1.288	1.251	1.213	1.195	1.160	1.124
2.40	1.975	1.841	1.706	1.644	1.582	1.520	1.458	1.397	1.350	1.293	1.255	1.217	1.199	1.162	1.125
2.30	1.999	1.860	1.721	1.657	1.592	1.529	1.465	1.403	1.356	1.298	1.259	1.221	1.200	1.163	1.126
2.20	2.023	1.880	1.737	1.671	1.604	1.538	1.472	1.410	1.361	1.302	1.262	1.221	1.202	1.163	1.125
2.10	2.046	1.901	1.756	1.687	1.618	1.549	1.480	1.418	1.368	1.306	1.265	1.222	1.203	1.164	1.124
2.00	2.077	1.927	1.777	1.705	1.633	1.562	1.490	1.422	1.372	1.307	1.265	1.222	1.202	1.162	1.122
1.95	2.090	1.940	1.790	1.717	1.644	1.568	1.496	1.427	1.374	1.306	1.264	1.221	1.200	1.158	1.120
1.90	2.107	1.956	1.805	1.731	1.658	1.580	1.502	1.430	1.376	1.305	1.263	1.220	1.199	1.157	1.119
1.85	2.123	1.972	1.821	1.746	1.671	1.590	1.510	1.432	1.378	1.302	1.260	1.217	1.196	1.154	1.116
1.80	2.142	1.990	1.838	1.762	1.686	1.603	1.519	1.435	1.379	1.300	1.258	1.215	1.194	1.152	1.112
1.75	2.169	2.007	1.859	1.780	1.700	1.613	1.527	1.438	1.379	1.298	1.253	1.211	1.191	1.151	1.110
1.70								1.442	1.380	1.297	1.245	1.210	1.179	1.141	1.106
1.65								1.443	1.378	1.292	1.240	1.205	1.173	1.137	1.100
1.60								1.443	1.376	1.287	1.234	1.197	1.167	1.132	1.095
1.55								1.444	1.373	1.280	1.227	1.190	1.160	1.120	1.090
1.50								1.445	1.369	1.273	1.218	1.184	1.154	1.117	1.086
1.45								1.445	1.365	1.266	1.209	1.174	1.144	1.108	1.079
1.40								1.444	1.359	1.257	1.198	1.162	1.136	1.098	1.072
1.35								1.442	1.355	1.249	1.186	1.150	1.123	1.081	1.061
1.30								1.440	1.347	1.238	1.172	1.132	1.107	1.068	1.046
1.25								1.437	1.339	1.230	1.160	1.115	1.085	1.050	1.030
1.20								1.436	1.327	1.214	1.143	1.095	1.070	1.034	1.011
1.15								1.432	1.315	1.197	1.125	1.076	1.052	1.014	0.990
1.10								1.426	1.298	1.180	1.106	1.057	1.032	0.993	0.968
1.05								1.414	1.281	1.156	1.080	1.037	1.013	0.972	0.946
1.00								1.377	1.247	1.119	1.052	1.008	0.987	0.945	0.916
0.95								1.175	1.063	0.952	0.900	0.857	0.837	0.798	0.773
0.90								1.037	0.928	0.825	0.770	0.737	0.710	0.677	0.650
0.85								0.996	0.899	0.784	0.731	0.692	0.670	0.635	0.607
0.80								0.974	0.874	0.753	0.700	0.657	0.637	0.603	0.571
0.75								0.955	0.853	0.728	0.674	0.632	0.614	0.575	0.542
0.70								0.938	0.834	0.708	0.657	0.613	0.588	0.555	0.529
0.65								0.925	0.819	0.689	0.639	0.598	0.572	0.540	0.517
0.60								0.914	0.810	0.681	0.630	0.588	0.561	0.527	0.507
0.55								0.905	0.798	0.672	0.620	0.580	0.553	0.516	0.498
0.50								0.884	0.789	0.664	0.606	0.572	0.546	0.510	0.491
0.45								0.874	0.781	0.659	0.599	0.564	0.540	0.503	0.484
0.40								0.857	0.770	0.652	0.590	0.550	0.529	0.494	0.472
0.30								0.849	0.762	0.649	0.584	0.543	0.518	0.486	0.461
0.20								0.846	0.758	0.648	0.577	0.535	0.505	0.470	0.449
0.10								0.844	0.751	0.647	0.575	0.530	0.505	0.470	0.444

Figure 3. 1977 ROBIN Program: Drag Table

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDO

DRAG TABLE (AUG 1977)

MACH	REYNOLDS NUMBER														
	1200.	1400.	1600.	1800.	2000.	2200.	2500.	3000.	3500.	4000.	4500.	5000.	5500.	6000.	6500.
4.60	1.069	1.055	1.038	1.063	1.053	1.046	1.038	1.025	1.015						
4.40	1.069	1.055	1.041	1.064	1.054	1.047	1.039	1.026	1.016						
4.20	1.067	1.055	1.043	1.064	1.052	1.046	1.037	1.025	1.016						
4.00	1.065	1.055	1.045	1.063	1.051	1.044	1.034	1.022	1.012						
3.80	1.070	1.058	1.051	1.063	1.050	1.042	1.032	1.019	1.009						
3.60	1.075	1.062	1.055	1.063	1.048	1.043	1.032	1.020	1.010						
3.40	1.084	1.066	1.060	1.061	1.046	1.039	1.023	1.017	1.007						
3.20	1.097	1.084	1.072	1.058	1.042	1.036	1.023	1.014	1.004						
3.00	1.100	1.089	1.075	1.054	1.039	1.032	1.023	1.010	1.000						
2.80	1.105	1.092	1.079	1.051	1.036	1.028	1.019	1.006	0.996						
2.60	1.108	1.094	1.080	1.051	1.036	1.028	1.019	1.006	0.996						
2.50	1.110	1.096	1.081	1.047	1.031	1.023	1.014	1.001	0.991						
2.40	1.111	1.097	1.082	1.036	1.021	1.020	1.010	0.997	0.987						
2.30	1.111	1.096	1.082	1.031	1.022	1.017	1.005	0.991	0.981						
2.20	1.110	1.095	1.081	1.031	1.022	1.017	1.005	0.991	0.981						
2.10	1.109	1.094	1.080	1.031	1.022	1.017	1.005	0.991	0.981						
2.00	1.108	1.093	1.078	1.031	1.022	1.017	1.005	0.991	0.981						
1.95	1.105	1.087	1.074	1.031	1.022	1.017	1.005	0.991	0.981						
1.90	1.103	1.088	1.073	1.031	1.022	1.017	1.005	0.991	0.981						
1.85	1.102	1.086	1.070	1.031	1.022	1.017	1.005	0.991	0.981						
1.80	1.095	1.081	1.066	1.031	1.022	1.017	1.005	0.991	0.981						
1.75	1.095	1.079	1.063	1.031	1.022	1.017	1.005	0.991	0.981						
1.70	1.083	1.066	1.051	1.031	1.022	1.017	1.005	0.991	0.981						
1.65	1.078	1.061	1.046	1.031	1.022	1.017	1.005	0.991	0.981						
1.60	1.073	1.054	1.041	1.031	1.022	1.017	1.005	0.991	0.981						
1.55	1.065	1.049	1.032	1.026	1.010	1.004	0.992	0.985	0.975						
1.50	1.061	1.044	1.027	1.016	1.003	0.992	0.983	0.971	0.960						
1.45	1.053	1.037	1.020	1.011	0.996	0.985	0.977	0.969	0.951						
1.40	1.044	1.027	1.011	1.001	0.989	0.977	0.969	0.963	0.942						
1.35	1.034	1.016	1.000	0.991	0.977	0.967	0.958	0.940	0.929						
1.30	1.021	1.002	0.985	0.980	0.968	0.956	0.945	0.928	0.917						
1.25	1.005	0.987	0.971	0.960	0.948	0.940	0.929	0.910	0.897						
1.20	0.985	0.964	0.954	0.942	0.929	0.924	0.910	0.892	0.878						
1.15	0.968	0.947	0.931	0.919	0.906	0.900	0.888	0.867	0.854						
1.10	0.947	0.936	0.918	0.907	0.892	0.881	0.870	0.855	0.841						
1.05	0.925	0.910	0.895	0.882	0.864	0.854	0.846	0.828	0.813						
1.00	0.891	0.869	0.857	0.841	0.829	0.818	0.808	0.796	0.781	0.801					
0.95	0.750	0.727	0.715	0.705	0.696	0.686	0.677	0.667	0.656	0.766					
0.90	0.678	0.661	0.652	0.638	0.624	0.620	0.610	0.602	0.593	0.766					
0.85	0.625	0.611	0.607	0.589	0.579	0.575	0.564	0.558	0.551	0.544					
0.80	0.584	0.571	0.562	0.551	0.541	0.535	0.530	0.525	0.519	0.513					
0.75	0.549	0.537	0.526	0.518	0.511	0.505	0.500	0.499	0.494	0.490					
0.70	0.527	0.515	0.504	0.498	0.488	0.483	0.479	0.473	0.470	0.464					
0.65	0.515	0.498	0.486	0.481	0.477	0.474	0.469	0.462	0.457	0.451					
0.60	0.500	0.489	0.479	0.470	0.463	0.460	0.456	0.450	0.444	0.444					
0.55	0.493	0.480	0.473	0.459	0.452	0.450	0.445	0.443	0.438	0.437					
0.50	0.484	0.472	0.464	0.452	0.443	0.442	0.436	0.434	0.430	0.429					
0.45	0.475	0.465	0.456	0.445	0.436	0.435	0.426	0.425	0.421	0.420					
0.40	0.467	0.457	0.448	0.437	0.429	0.426	0.419	0.416	0.411	0.410					
0.30	0.454	0.445	0.435	0.428	0.421	0.414	0.407	0.402	0.395	0.391					
0.20	0.444	0.435	0.424	0.419	0.410	0.405	0.399	0.391	0.386	0.383					
0.10	0.433	0.425	0.416	0.406	0.398	0.393	0.391	0.384	0.377	0.376					
0.00	0.430	0.414	0.407	0.396	0.389	0.387	0.384	0.380	0.372	0.371					

Figure 3 (cont'd). 1977 ROBIN Program: Drag Table

DRAG TABLE (AUG 1977)

REYNOLDS NUMBER
 7000. 8000. 9000. 10000. 15000. 20000. 25000. 30000. 35000. 40000.

MACH	7000	8000	9000	10000	15000	20000	25000	30000	35000	40000
4.60	0.461	0.465	0.469	0.475	0.477	0.485	0.497	0.502	0.511	0.512
4.40	0.454	0.456	0.459	0.463	0.468	0.483	0.487	0.495	0.501	0.505
4.20	0.444	0.447	0.450	0.451	0.462	0.472	0.479	0.485	0.491	0.496
4.00	0.438	0.440	0.442	0.443	0.456	0.464	0.472	0.479	0.485	0.492
3.80	0.431	0.432	0.434	0.435	0.449	0.456	0.465	0.474	0.480	0.486
3.60	0.428	0.431	0.432	0.433	0.444	0.450	0.459	0.468	0.475	0.480
3.40	0.425	0.426	0.427	0.431	0.442	0.448	0.455	0.463	0.469	0.475
3.20	0.414	0.417	0.420	0.422	0.435	0.441	0.445	0.454	0.457	0.465
3.00	0.406	0.408	0.410	0.417	0.428	0.436	0.440	0.449	0.451	0.456
2.80	0.400	0.402	0.404	0.407	0.419	0.431	0.437	0.448	0.450	0.455
2.60	0.394	0.396	0.399	0.402	0.410	0.425	0.438	0.447	0.450	0.455
2.50										
2.40										
2.30										
2.20										
2.10										
2.00										
1.95										
1.90										
1.85										
1.80										
1.75										
1.70										
1.65										
1.60										
1.55										
1.50										
1.45										
1.40										
1.35										
1.30										
1.25										
1.20										
1.15										
1.10										
1.05										
1.00										
0.75										
0.70										
0.65										
0.60										
0.55										
0.50										
0.45										
0.40										
0.30										
0.20										
0.10										
0.00										

Figure 3 (cont'd). 1977 ROBIN Program: Drag Table

Comparison of Output

Comparison of a flight reduced with both the 1977 ROBIN and the 1972 HIROBIN program is shown in Figure 4. Note the difference in the initial values of temperature at 97 Km (due to the 1976 Standard Atmosphere), the gradual change in temperature values above 76 Km (removal of supersonic bias), the removal of the Mach 1 spike near 68 Km, and the drag table induced temperature changes below 58 Km.

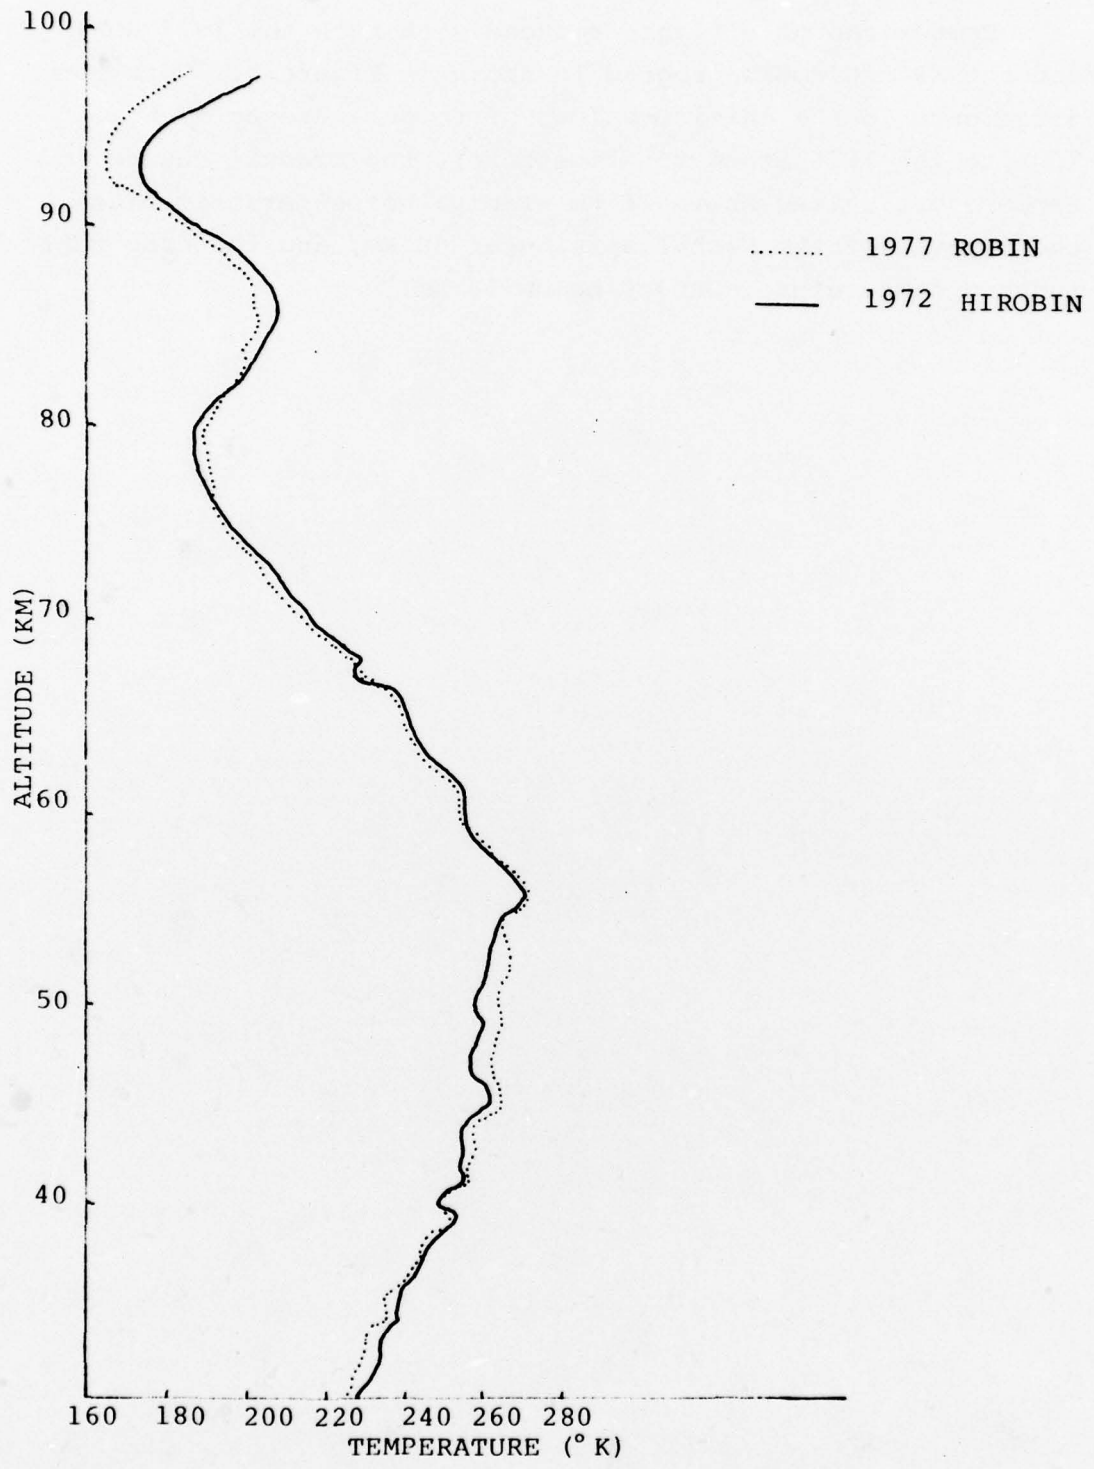


Figure 4. Comparison: 1977 ROBIN vs. 1972 HIROBIN

SECTION 2
PURPOSE AND USE OF PROGRAM

The 1977 ROBIN program is specifically designed for computer reduction of ROBIN flights which attain an apogee of approximately 115 Km, and are tracked by an FPS/16 radar. The program also provides accurate reduction for ROBIN flights attaining other apogees between 65 and 150 Km. If a passive sphere other than the one meter ROBIN (approximately 165 grams) is used, reduction with this program is still possible. There may be times, however, when drag coefficients are not available and thus density, temperature, and pressure cannot be computed. The time of fall test used to determine sphere collapse is not used for spheres with dimensions that differ from the ROBIN.

At each second of flight, the program calculates: altitude, wind components, and direction; density, temperature, and pressure; the RMS noise error in winds, density, temperature, and pressure, and other balloon dynamics.

The following are some of the important features of the 1977 ROBIN program.

- (1) The program begins wind and thermodynamic computations when the vertical acceleration (\ddot{z}) becomes greater than -8 m/sec^2 . For a sphere apogee of 115 Km, this occurs at about 95 Km.
- (2) The program computes the RMS noise errors in wind, density, temperature, and pressure. A discussion of other type errors is contained in Section 4 of this manual.
- (3) The program determines sphere apogee whenever sufficient tracking data is available.
- (4) The program uses two tests as an indication of sphere collapse, a time of fall test, and a density gradient test (λ check).
- (5) At the end of the flight the program prints a frequency response table for density and winds. This enables the user to observe what wavelengths have been retained in the output data.

(6) The program provides the following options of output: a) output at each second of flight; b) additional interpolated output at each 200 meters of altitude; and c) output each kilometer only.

(7) Below 60 Km the density smoothing interval expands in such a manner so as to maintain a constant two percent noise error in density.

(8) If spheres other than the ROBIN are used, the reduction can be optimized by changing the smoothing input parameters. However, when using a ROBIN sphere at any escape altitude, it is of fundamental importance that one not change any of the smoothing input.

SECTION 3
OPERATING INSTRUCTIONS

The High Altitude ROBIN program was written using FORTRAN IV. The program was tested on the CDC 6600 computer at Wright-Patterson Air Force Base.

The basic program generally requires two to three minutes to run on the CDC system; however, the run time can be almost twice that if the data tape requires a great deal of editing.

The input to the ROBIN program consists of time, X, Y and Z coordinates. Time is in units of seconds Zulu and the X, Y and Z position coordinates in units of feet. Generally the position coordinates are given with respect to the coordinate system of the firing range. The output from the ROBIN program gives wind measurements with respect to the north and east components. To accomplish the transformation of coordinate systems the positive clockwise angle from geographical north to the positive X-axis of the range coordinate system must be known. The angle is called Z_b and is input to the ROBIN program.

The ROBIN system is divided into two related programs. The first is the tape editing program. It should be noted that this program has not changed since the 1972 version. The main function of this program is to replace bad data points with interpolated data. Its printed output consists of the discarded old points and the added new points. (See Figure 5). The editing routine then writes the edited data on a tape or disk. The data is written in 97 word records with the exception of the first record on a file which contains the flight identification number. The 97 word records begin with a FORTRAN loader word and thereafter contain a 96 word array of data points. An undetermined number of records are written per file since a new file is started every time a gap greater than two seconds occurs in the data. Each time an end of file is written a notice is placed in the printed output.

OLD POINTS	.66131540E+05	.13631032E+06	.36562330E+06	-.44610370E+05
OLD POINTS	.66131640E+05	.13649870E+06	.36573300E+06	-.44693710E+05
OLD POINTS	.66131740E+05	.13667149E+06	.36585229E+06	-.44772160E+05
OLD POINTS	.66131840E+05	.13684326E+06	.36597428E+06	-.44857540E+05
OLD POINTS	.66131935E+05	.13700379E+06	.36610589E+06	-.44924660E+05
OLD POINTS	.66132040E+05	.13712782E+06	.36624848E+06	-.44987160E+05
OLD POINTS	.66132140E+05	.13725722E+06	.36639382E+06	-.45036970E+05
OLD POINTS	.66132240E+05	.13735227E+06	.36654462E+06	-.45068330E+05
NEW POINTS	.66131539E+05	.13628218E+06	.36563888E+06	-.44601243E+05
NEW POINTS	.66131639E+05	.13642779E+06	.36577113E+06	-.44663476E+05
NEW POINTS	.66131739E+05	.13657339E+06	.36590338E+06	-.44725799E+05
NEW POINTS	.66131839E+05	.13671900E+06	.36603562E+06	-.44787942E+05
NEW POINTS	.66131939E+05	.13686461E+06	.36616787E+06	-.44850175E+05
NEW POINTS	.66132039E+05	.13701022E+06	.36630012E+06	-.44912408E+05
NEW POINTS	.66132139E+05	.13715583E+06	.36643237E+06	-.44974642E+05
NEW POINTS	.66132239E+05	.13730144E+06	.36656462E+06	-.45036875E+05
OLD POINTS	.66138740E+05	.14180273E+06	.37686530E+06	-.47041170E+05
OLD POINTS	.66138840E+05	.14201162E+06	.37695136E+06	-.47117850E+05
OLD POINTS	.66138939E+05	.14222596E+06	.37704966E+06	-.47188960E+05
OLD POINTS	.66139040E+05	.14243389E+06	.37712868E+06	-.47265650E+05
OLD POINTS	.66139140E+05	.14259045E+06	.37723320E+06	-.47325190E+05
OLD POINTS	.66139240E+05	.14272872E+06	.37734765E+06	-.47386150E+05
OLD POINTS	.66139340E+05	.14285311E+06	.37747206E+06	-.47435170E+05
OLD POINTS	.66139439E+05	.14297311E+06	.37759086E+06	-.47480540E+05
OLD POINTS	.66139540E+05	.14309666E+06	.37771240E+06	-.47538900E+05
OLD POINTS	.66139640E+05	.14318262E+06	.37784002E+06	-.47575070E+05
OLD POINTS	.66139740E+05	.14326629E+06	.37796763E+06	-.47618190E+05
NEW POINTS	.66138740E+05	.14174846E+06	.37687629E+06	-.47031848E+05
NEW POINTS	.66138840E+05	.14199112E+06	.37698889E+06	-.47088097E+05
NEW POINTS	.66138940E+05	.14203377E+06	.37710153E+06	-.47144345E+05

Figure 5. ROBIN Position Edit of Tape 1877

DATA INPUT TO ROBIN EDITING PROGRAM

Card 1

<u>Column</u>	<u>Variable</u>	<u>Description</u>
1-10	ID	Flight Identification number
11-15	IX	Output unit
15-20	IY	Input Unit
21-30	XTOL	The X tolerance = 150.0 ft.
31-40	YTOL	The Y tolerance = 150.0 ft.
41-50	ZTOL1	The Z tolerance at or above 200000.0 ft. = 360.0 ft.
51-60	ZTOL2	The Z tolerance below 200000.0 ft = 200.0 ft.
61-70	ALT	Read past ascent data to ALT = 300000.0 ft. (for high apogee Robin; adjust if apogee is known to be lower)

The main ROBIN program uses the edited data to compute the desired meteorological parameters. The methods used to compute the parameters are discussed in References 2, 4, and 5. Once the parameters are computed they are printed. The ROBIN program provides the options of printing only the actual data, printing the actual data and data interpolated at every 200 meters of descent, or printing interpolated data every kilometer. Figures 6, 7, and 8 illustrate these alternatives.

DATA INPUT TO ROBIN PROGRAM

Card 1

<u>Column</u>	<u>Variable</u>	<u>Description</u>
1-5	NXY1	Number of points for wind velocity fit = 51.
6-10	NXY2	Number of points for wind acceleration fit = 35.
11-15	NZ1	Number of points for density velocity fit = 19.
16-20	NZ2	Number of points for density acceleration fit = 21
21-25	IDEGX1	Degree of fit for wind velocity=3
26-30	IDEGX2	Degree of fit for wind acceleration = 3.
31-35	IDEGZ1	Degree of fit for density velocity = 1.
36-40	IDEGZ2	Degree of fit for density acceleration = 3.

Card 2

1-80	ANAME	Description title of job.
------	-------	---------------------------

Card 3

1-10	ID	Flight number.
11-12	IX	Input tape (disk) unit.
13-14	IY	Output tape (disk) unit.
15-20	ALA	Latitude of launch site
21-27	HMSL	Height above mean sea level of launch site (meters).
28-33	ZB	Angle of X axis from north (degrees).

REDUCTION OF MSMR TAPE 1A77

= PTS. FIT XY-VEL XV-ACC Z-VEL Z-ACC 7-ACC
 DEGREE FIT 51 35 19 21
 ID UNIT ALA GS RC HMSL ZB AMS DIA INT
 1877 9 6 32.56 -9.780505 6371229.3 1220.0 U-V .1616 1.00000 0

TIME ALT ENDRD WINDR SPEED DIR PRESS T DENSITY Z VEL Z ACC MACH REYNL CD ***** NOISE ERROR IN****
 ZULU METERS M/S M/S KNOTS DEG MB .K GP/H3 M/S M/S2 M/S2 *****PERCENT***** M/S M/S

BALLOON APOGEE = 127 KM.

18.28.23	98802	98.0	159.0	371.97	331	.00039	193	.00070	-718.98	-7.83	3.06	47	1.535	9.4	.6	9.4	25.9	33.2
18.28.24	98095	92.9	156.4	356.78	329	.00044	194	.00078	-726.58	-7.63	3.05	53	1.517	8.5	1.2	9.6	23.7	30.0
18.28.25	97359	95.5	140.7	330.41	325	.00049	198	.00087	-734.48	-7.41	3.02	58	1.505	7.8	1.4	7.9	21.6	27.0
18.28.26	96637	96.3	119.6	295.92	321	.00056	198	.00096	-741.34	-7.17	3.00	65	1.492	7.1	1.5	7.2	19.6	24.2
18.28.27	95878	92.7	94.8	257.50	315	.00063	202	.00109	-748.84	-6.92	2.95	71	1.482	6.5	1.5	6.7	17.6	21.4
18.28.28	95133	91.4	68.3	221.60	306	.00071	205	.00121	-755.70	-6.64	2.92	78	1.470	5.9	1.5	6.1	15.8	18.9
18.28.29	94378	88.6	43.0	188.27	296	.00080	205	.00136	-761.81	-6.31	2.90	88	1.458	5.4	1.5	5.6	14.0	16.5
18.28.30	93605	81.8	20.5	163.75	284	.00091	203	.00156	-767.15	-5.90	2.90	101	1.420	4.8	1.5	5.0	12.3	14.4
18.28.31	92837	76.2	1.4	148.02	271	.00103	201	.00178	-772.47	-5.43	2.90	116	1.400	4.3	1.4	4.5	10.8	12.5
18.28.32	92081	68.6	14.3	138.05	258	.00117	199	.00205	-778.41	-4.86	2.92	136	1.377	3.8	1.3	4.0	9.4	10.4
18.28.33	91300	62.0	26.7	131.18	246	.00134	195	.00239	-782.98	-4.18	2.95	161	1.349	3.4	1.2	3.6	8.2	9.3
18.28.34	90525	56.0	37.3	130.73	236	.00153	191	.00279	-787.24	-3.38	2.98	193	1.318	2.9	1.1	3.2	7.2	8.1
18.28.35	89735	48.9	45.2	129.31	227	.00176	186	.00329	-790.16	-2.47	3.01	231	1.282	2.6	1.1	2.8	6.3	7.0
18.28.36	88939	39.6	50.3	124.39	218	.00203	182	.00388	-792.07	-1.33	3.03	275	1.267	2.2	1.0	2.4	5.5	6.1
18.28.37	88158	30.2	53.9	120.10	209	.00235	179	.00457	-793.12	-.09	3.05	327	1.255	2.0	.9	2.2	4.9	5.3
18.28.38	87350	21.0	56.3	116.77	200	.00274	174	.00538	-793.01	1.29	3.05	380	1.229	1.7	.8	1.9	4.3	4.7
18.28.39	86570	10.9	57.7	114.11	190	.00317	174	.00634	-789.94	2.79	3.04	445	1.211	1.5	.7	1.7	3.8	4.1
18.28.40	85769	1.0	58.4	113.53	180	.00370	174	.00736	-786.79	4.34	3.01	507	1.194	1.4	.7	1.5	3.4	3.7
18.28.41	84975	-8.3	58.6	115.18	171	.00429	177	.00841	-781.80	5.94	2.98	565	1.185	1.2	.6	1.4	3.1	3.3
18.28.42	84208	-19.2	58.0	118.71	161	.00495	180	.00954	-775.32	7.51	2.91	622	1.178	1.1	.5	1.3	2.8	3.0
18.28.43	83437	-27.8	57.0	123.16	154	.00569	183	.01082	-766.32	9.11	2.84	680	1.171	1.0	.5	1.2	2.6	2.7
18.28.44	82658	-36.3	55.5	128.83	146	.00655	186	.01223	-756.53	10.71	2.78	741	1.163	1.0	.5	1.1	2.4	2.5
18.28.45	81917	-43.3	53.5	133.76	140	.00747	189	.01376	-745.27	12.30	2.72	809	1.153	.9	.4	1.0	2.2	2.2
18.28.46	81178	-48.5	51.4	137.22	136	.00850	191	.01545	-731.88	13.82	2.65	880	1.142	.9	.4	.9	2.0	2.1
18.28.47	80454	-53.5	49.0	140.98	132	.00963	194	.01723	-717.65	15.24	2.58	961	1.131	.8	.4	.9	1.9	1.3
18.28.48	79756	-57.1	46.5	143.86	129	.01084	197	.01913	-701.97	16.53	2.51	1019	1.122	.8	.3	.9	1.8	1.4
18.28.49	79035	-59.0	43.9	142.78	126	.01224	201	.02120	-685.80	17.71	2.42	1074	1.119	.8	.3	.8	1.7	1.7
18.28.50	78375	-60.0	41.1	141.38	124	.01365	203	.02340	-666.66	18.70	2.34	1134	1.116	.8	.3	.8	1.6	1.6
18.28.51	77706	-60.4	38.1	138.82	122	.01523	206	.02572	-647.56	19.51	2.26	1190	1.111	.7	.3	.8	1.5	1.5
18.28.52	77081	-59.1	35.3	133.77	120	.01684	207	.02825	-626.72	20.13	2.18	1255	1.106	.7	.3	.8	1.4	1.4
18.28.53	76466	-57.1	32.5	127.60	119	.01859	209	.03093	-605.57	20.58	2.10	1319	1.100	.7	.2	.8	1.4	1.4
18.28.54	75870	-54.1	30.0	120.11	118	.02044	211	.03362	-585.15	20.86	2.02	1372	1.095	.7	.2	.8	1.3	1.3
18.28.55	75292	-50.7	27.3	111.88	118	.02238	213	.03654	-564.67	20.96	1.95	1433	1.085	.7	.2	.8	1.3	1.3
18.28.56	74755	-47.0	24.6	103.16	117	.02434	214	.03949	-543.86	20.91	1.87	1489	1.080	.7	.2	.8	1.3	1.2
18.28.57	74210	-42.8	22.2	93.60	117	.02648	216	.04254	-523.69	20.67	1.80	1539	1.071	.6	.2	.8	1.2	1.2
18.28.58	73709	-38.4	19.7	83.72	117	.02890	216	.04592	-502.48	20.29	1.73	1611	1.057	.6	.2	.8	1.2	1.2
18.28.59	73203	-34.1	17.4	74.42	117	.03090	217	.04954	-482.50	19.79	1.66	1676	1.052	.6	.2	.8	1.2	1.1
18.28.0	72748	-28.4	15.5	64.47	117	.03314	218	.05294	-463.40	19.16	1.59	1711	1.036	.6	.2	.8	1.2	1.1

Figure 6. University of Dayton 1977 ROBIN Program (Actual Data)

REDUCTION OF WS4E TAPE 1877
 XY-VEL XY-ACC Z-VEL Z-ACC
 = PTS. FIT 51 35 19 21
 DEGREE FIT 3 3 1 3
 IO UNIT ALA CS 65 MMSL ZB AMS OIA INT
 1877 8 6 32.46 -9.780505 6371229.3 1220.0 0.0 .1614 1.00000 1

TIME ALT EWINO NWINO SPEED DIR PRESS Y DENSITY Z VEL Z ACC MACH FEYNL CD DENS BFC NOISE ERROR IN***
 ZULU METERS M/S H/S KNOTS DEG MB K GR/M3 M/S M/S2 M/S M/S *****PERCENT***** M/S M/S

BALLOON APOGEE = 127 KM.

18.24.23	98802	90.0	-169.0	371.97	331	.00039	193	.00070	-710.98	-7.83	3.06	47	1.535	9.4	.6	9.4	25.9	33.2
	98800	90.0	-169.0	371.93	331	.00039	193	.00070	-719.00	-7.83	3.06	47	1.535	9.4	.6	9.4	25.9	33.2
	98600	90.8	-166.0	367.62	331	.00040	193	.00072	-721.15	-7.77	3.06	49	1.530	9.2	.7	8.7	25.3	32.3
	98400	91.7	-163.0	363.32	330	.00041	193	.00074	-723.31	-7.71	3.06	51	1.524	8.9	.9	9.0	24.6	31.4
	98200	92.5	-160.0	359.02	329	.00043	194	.00077	-725.46	-7.66	3.05	52	1.519	8.7	1.1	8.7	24.0	30.5
18.24.24	98095	92.9	-158.4	356.78	329	.00044	194	.00078	-726.58	-7.63	3.05	53	1.517	8.5	1.2	8.6	23.7	30.0
	98000	93.2	-156.2	353.33	329	.00045	194	.00079	-727.50	-7.50	3.05	54	1.515	8.4	1.2	8.5	23.4	29.6
	97800	94.0	-151.4	346.32	328	.00046	195	.00081	-729.71	-7.54	3.04	55	1.512	8.2	1.3	8.3	22.9	28.8
	97600	94.7	-146.7	339.28	327	.00047	196	.00084	-731.83	-7.48	3.03	57	1.509	8.0	1.3	8.1	22.3	28.0
	97400	95.4	-141.9	332.19	326	.00049	197	.00086	-733.95	-7.43	3.02	58	1.506	7.8	1.4	8.0	21.7	27.2
18.24.25	97349	95.5	-140.7	330.41	325	.00049	198	.00087	-734.48	-7.41	3.02	58	1.505	7.8	1.4	7.9	21.6	27.0
	97200	95.3	-136.3	323.17	325	.00051	198	.00089	-735.92	-7.36	3.02	60	1.502	7.6	1.4	7.8	21.2	26.4
	97000	94.9	-130.4	313.49	323	.00052	198	.00092	-737.85	-7.29	3.01	62	1.499	7.4	1.4	7.6	20.5	25.6
	96800	94.6	-124.5	303.81	322	.00054	198	.00095	-739.77	-7.22	3.01	64	1.495	7.2	1.5	7.4	20.0	24.8
18.24.26	96637	94.3	-119.5	295.92	321	.00056	198	.00098	-741.34	-7.17	3.00	65	1.492	7.1	1.5	7.2	19.6	24.2
	96600	94.2	-118.4	294.04	321	.00056	198	.00098	-741.71	-7.16	3.00	65	1.492	7.0	1.5	7.2	19.5	24.0
	96400	93.8	-111.9	283.91	320	.00058	199	.00101	-743.68	-7.09	2.99	67	1.489	6.9	1.5	7.0	19.0	23.3
	96200	93.4	-105.3	273.78	318	.00060	200	.00104	-745.66	-7.02	2.97	68	1.487	6.7	1.5	6.9	18.5	22.6
	96000	92.9	-98.8	263.65	316	.00062	201	.00107	-747.64	-6.96	2.96	70	1.484	6.5	1.5	6.7	17.9	21.9
18.24.27	95878	92.7	-94.8	257.50	315	.00063	202	.00109	-748.84	-6.92	2.95	71	1.482	6.5	1.5	6.7	17.6	21.4
	95800	92.5	-92.0	253.72	314	.00064	202	.00110	-749.56	-6.89	2.95	72	1.481	6.4	1.5	6.6	17.4	21.2
	95600	92.2	-84.9	244.07	312	.00066	203	.00113	-751.40	-6.81	2.94	74	1.478	6.3	1.5	6.4	16.9	20.5
	95400	91.8	-77.8	234.43	310	.00068	204	.00117	-753.25	-6.74	2.93	75	1.475	6.1	1.5	6.3	16.4	19.8
	95200	91.5	-70.6	224.79	307	.00071	204	.00120	-755.09	-6.66	2.92	77	1.471	6.0	1.5	6.2	15.9	19.1
18.24.28	95133	91.4	-68.3	221.60	306	.00071	205	.00121	-755.70	-6.64	2.92	78	1.470	5.9	1.5	6.1	15.8	19.0
	95000	90.6	-63.8	215.65	305	.00073	205	.00124	-756.64	-6.57	2.91	80	1.467	5.9	1.5	6.0	15.5	18.5
	94800	89.4	-57.1	206.86	302	.00075	205	.00127	-758.05	-6.48	2.91	82	1.461	5.7	1.5	5.9	15.0	17.8
	94600	88.2	-50.4	196.04	299	.00078	205	.00131	-759.45	-6.40	2.90	85	1.456	5.5	1.5	5.7	14.5	17.2
	94400	87.0	-43.7	189.21	296	.00080	205	.00135	-760.86	-6.32	2.90	87	1.450	5.4	1.5	5.6	14.1	16.6
18.24.29	94378	86.8	-43.0	188.27	296	.00080	205	.00136	-761.01	-6.31	2.90	88	1.450	5.4	1.5	5.6	14.0	16.5
	94200	85.7	-37.8	182.60	293	.00083	205	.00140	-762.43	-6.21	2.90	91	1.443	5.2	1.5	5.4	13.6	16.0
	94000	84.4	-32.0	176.26	290	.00086	204	.00146	-764.01	-6.11	2.90	94	1.435	5.1	1.5	5.3	13.2	15.5
	93800	83.1	-26.1	169.92	287	.00088	203	.00151	-765.60	-6.00	2.90	98	1.427	4.9	1.5	5.2	12.8	14.9
18.24.30	93605	81.8	-20.5	163.75	284	.00091	203	.00156	-767.15	-5.90	2.90	101	1.420	4.8	1.5	5.0	12.3	14.4

Figure 7. University of Dayton 1977 ROBIN Program (Data Interpolated every 200 meters)

PRODUCTION OF MSMP TAPE 1277 (TODAY IS 12 JUNE 78)

= PYS. FIT XY-VEL XY-ACC Z-VEL Z-ACC
 51 19 21
 DEGREE FIT 3 1 FG HMSL ZB AMS DIA INT
 10 UNIT ALA GS 3 1 3
 7822 6.3246 -9.780505 6371229.3 1220.0 0.0 1614 1.00000 2

TIME ALT EMIND NMIND SPEED DIR PRESS I K LENSITY Z VEL Z ACC MACH REYNL CD *****M.S. NOISE ERROR IN*****
 ZULU METERS M/S KNOTS DEG MB MR GF/M3 M/S M/S2 M/S M/S M/S M/S M/S

BALLOON APOGEE = 127 KM.

94000	33.2	156.2	353.32	329	.00044	194	.00073	-727.60	-7.60	3.05	54	1.515	8.4	1.2	8.5	23.4	29.6
97000	34.3	130.4	313.43	323	.00052	199	.00092	-737.35	-7.29	3.01	62	1.435	7.4	1.4	7.6	20.6	25.6
96000	92.9	-58.3	263.66	316	.00062	201	.00107	-747.64	-6.96	2.96	70	1.484	6.6	1.5	6.7	17.9	21.9
95000	30.6	-63.8	215.50	305	.00073	205	.00124	-756.64	-6.58	2.91	80	1.467	5.6	1.5	6.0	15.5	18.5
94000	84.4	-32.0	176.26	290	.00086	204	.00146	-764.01	-6.11	2.90	94	1.435	5.1	1.5	5.3	13.2	15.5
93000	77.4	-6.5	151.36	274	.00101	202	.00173	-771.34	-5.53	2.90	113	1.404	4.4	1.4	4.6	11.1	12.4
92000	69.8	15.6	137.37	257	.00119	198	.00202	-776.99	-4.79	2.92	138	1.374	3.8	1.3	4.0	9.3	10.6
91000	59.7	30.4	131.00	242	.00141	193	.00253	-784.53	-3.87	2.96	173	1.337	3.2	1.2	3.4	7.8	8.8
90000	51.3	42.6	129.73	230	.00168	184	.00311	-793.19	-2.74	3.00	218	1.301	2.7	1.1	2.9	6.6	7.3
89000	40.3	49.9	124.77	218	.00201	183	.00383	-791.93	-1.41	3.03	272	1.269	2.3	1.0	2.5	5.6	6.2
88000	28.4	54.4	119.45	207	.00242	176	.00472	-793.10	.18	3.05	337	1.242	1.9	.9	2.1	4.8	5.2
87000	16.5	57.0	115.57	196	.00293	175	.00573	-791.63	1.96	3.04	410	1.221	1.6	.8	1.8	4.1	4.4
86000	3.9	58.2	113.70	183	.00354	174	.00705	-787.70	3.69	3.02	493	1.199	1.4	.7	1.6	3.6	3.8
85000	-9.0	58.6	115.13	171	.00427	177	.00837	-781.35	5.89	2.96	564	1.186	1.2	.6	1.4	3.1	3.3
84000	-21.5	57.8	119.92	159	.00514	181	.00987	-772.39	7.95	2.93	637	1.176	1.1	.5	1.2	2.7	2.9
83000	-32.5	56.2	126.35	148	.00616	185	.01159	-760.99	10.01	2.81	714	1.167	1.0	.5	1.1	2.5	2.6
82000	-42.6	53.7	133.21	141	.00736	188	.01358	-746.51	12.12	2.72	801	1.154	.9	.4	1.0	2.2	2.3
81000	-49.7	50.8	141.15	135	.00876	192	.01587	-728.37	14.17	2.63	897	1.139	.9	.4	.9	2.0	2.0
80000	-55.9	47.4	142.33	130	.01040	196	.01844	-707.44	16.08	2.54	995	1.125	.8	.3	.8	1.8	1.8
79000	-50.0	43.8	142.71	126	.01231	201	.02131	-684.02	17.76	2.42	1077	1.114	.8	.3	.8	1.7	1.7
78000	-40.3	39.5	139.94	123	.01451	204	.02463	-655.35	19.15	2.30	1166	1.113	.7	.3	.8	1.5	1.5
77000	-55.9	34.9	132.95	120	.01706	207	.02853	-623.31	20.19	2.17	1264	1.105	.7	.3	.8	1.4	1.4
76000	-54.7	30.5	121.74	119	.02002	211	.03302	-583.59	20.80	2.04	1360	1.096	.7	.2	.8	1.4	1.3
75000	-48.7	25.8	107.13	117	.02363	214	.03812	-533.31	20.93	1.90	1463	1.082	.7	.2	.8	1.3	1.2
74000	-40.9	21.1	89.44	117	.02735	216	.04393	-514.65	20.51	1.77	1563	1.065	.8	.2	.8	1.2	1.2
73000	-32.0	16.6	69.97	117	.03188	217	.05103	-473.97	19.51	1.63	1692	1.039	.8	.2	.8	1.2	1.1
72000	-23.2	12.9	51.53	119	.03716	217	.05953	-431.07	17.87	1.49	1802	1.015	.9	.2	.9	1.1	1.1
71000	-18.3	10.4	40.85	119	.04331	218	.06898	-390.03	15.65	1.34	1892	.983	1.0	.2	1.0	1.1	1.0
BALLOON STILL INFLATED AT 70 KM.																	
70000	-20.3	9.5	43.57	115	.05038	220	.07974	-351.52	12.94	1.20	1964	.933	1.1	.2	1.1	1.1	1.0
69000	-33.3	10.3	57.64	107	.05860	217	.09365	-317.02	10.23	1.03	2024	.877	1.2	.2	1.2	1.2	1.0
68000	-52.3	11.2	104.73	101	.06828	213	.11143	-271.77	7.54	.93	2226	.778	1.4	.2	1.4	1.2	1.0
67000	-67.5	11.2	132.97	93	.08036	210	.13283	-253.15	4.94	.92	2597	.640	1.6	.2	1.6	1.3	1.1
66000	-66.8	11.2	131.64	93	.09386	213	.15310	-248.95	3.53	.85	2725	.565	1.7	.2	1.7	1.3	1.1
65000	-56.2	12.3	111.71	102	.11000	209	.18310	-223.65	3.42	.81	3125	.532	1.8	.2	1.8	1.3	1.1
64000	-48.1	11.1	95.93	102	.12934	205	.21645	-213.16	3.01	.76	3464	.500	1.9	.2	1.9	1.3	1.1
63000	-44.2	4.8	66.41	96	.15165	214	.24615	-206.35	2.54	.71	3644	.473	2.0	.2	2.0	1.2	1.0

Figure 8. University of Dayton 1977 ROBIN Program (Data Interpolated Every Km)

THIS PAGE IS BEST QUALITY FRAGMENTARY FROM COPY FORWARDED TO DOD

34-40	AMS	Mass of Balloon (kilograms).
41-48	DIA	Diameter of balloon (meters).
49-51	Interp	Switch Interp = 0 no interpolation Interp = 1 interpolation every 200 meters. Interp = 2 print at every kilometer only.

The deck setup is shown in Figure 9.

Input and Output Units by ROBIN System

Units five and six are the standard FORTRAN input and output units.

<u>Units</u>	<u>Mode</u>	<u>Block Size</u>	<u>Usage</u>
Edit Program			
8	Binary	97	Edited input tape (or disk output for edit program.
1	Binary	97	Input tape
ROBIN Program			
8	Binary	97	Edit input tape (or disk). Same as unit 8 in edit program.
10	Binary	6	Output tape(or disk) for plot program.

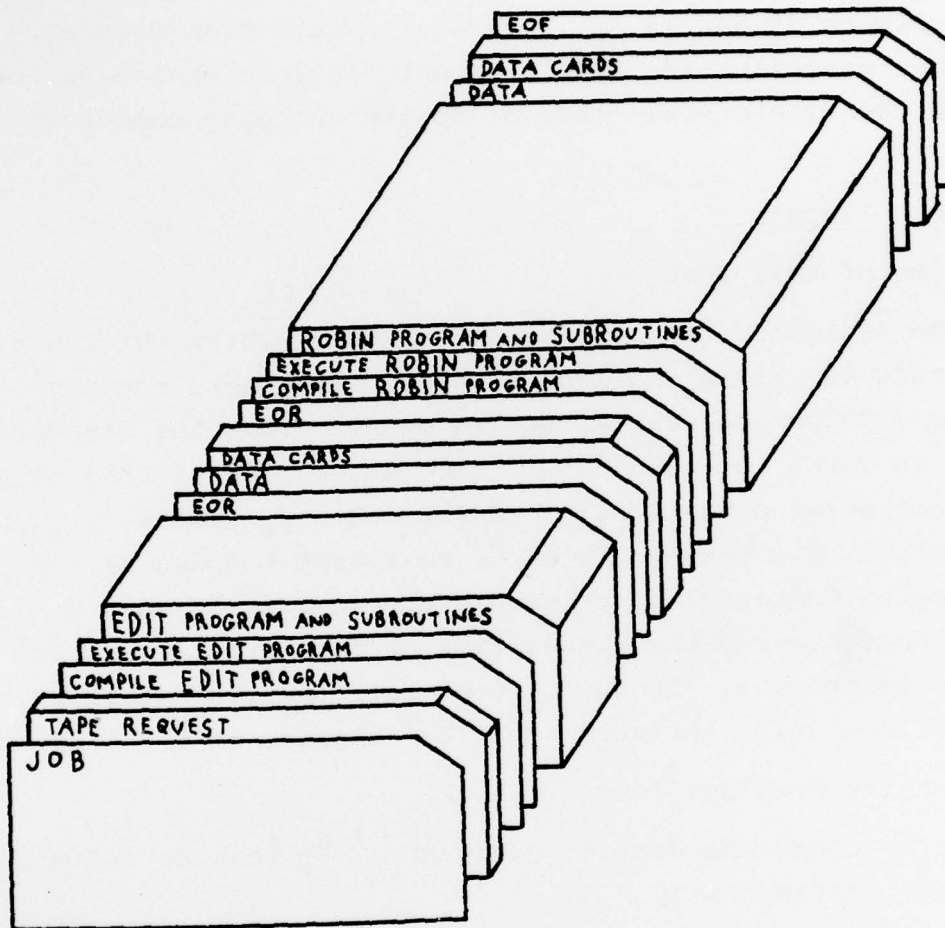


Figure 9. Typical Deck Setup

SECTION 4
DATA INTERPRETATION

Apogee Determination

Sphere apogee can be determined if the radar acquires track before the downward velocity of the sphere exceeds 150 m/sec. The sphere apogee must be determined in order to use the time of fall test between 80 and 55 Km. If radar acquisition does not permit apogee determination, the printout "Balloon Apogee Unknown" appears and the time of fall test of sphere collapse commences at 55 Km.

Sphere Collapse

a) Time of Fall Test

The estimated time of fall of a ROBIN sphere through 5 and 10 Km altitude layers in the 1962 Standard Atmosphere density (ρ_{62}) and ± 20 percent variations in density from the Standard Atmosphere is given in Table 1. If the actual time of fall of a sphere is not between that estimated for a $0.8\rho_{62}$ and $1.2\rho_{62}$ density profile, the message "Time of Fall Test Between XX and XX Km indicates Collapse" is printed out. Invariably when a sphere collapse occurs, the actual time of fall greatly exceeds the imposed tolerances. If the time of fall test is satisfied, the message "Balloon Still Inflated at XX Km" appears in the printout.

b) Density Gradient Test (λ Check)

Below 60 Km the density gradient $\left(\frac{1}{\rho} \frac{d\rho}{dz}\right)$ can be estimated by computing λ defined as:

$$\lambda = \frac{2}{z_2 - z_1} \left(\text{Log}(z_2) - \text{Log}(z_1) \right) \approx \frac{1}{\rho} \frac{d\rho}{dz}$$

The expected value of λ between 30 and 60 Km, obtained from the "62" Standard Atmosphere, is $\lambda = .00014$. To allow for density perturbations in the real atmosphere, a tolerance of .00005 is allowed. In addition to allowing a tolerance in λ for real density perturbation, a tolerance must also be allowed for the inaccuracies

ALTITUDE (KM)

		80-70	70-60	60-55	55-50	50-45	45-40	40-35	35-30	
150 km	.8ρ ₆₂	18	43	32	44	59	84	124	198	
	ρ ₆₂	21	49	37	51	69	96	142	218	
	1.2ρ ₆₂	24	52	39	54	74	106	156	232	
140 km	.8ρ ₆₂	19								
	ρ ₆₂	22								
	1.2ρ ₆₂	25								
125 km	.8ρ ₆₂	21	Same for all Apogees							
	ρ ₆₂	25								
	1.ρ ₆₂	27								
115 km	.8ρ ₆₂	22								
	ρ ₆₂	26								
	1.2ρ ₆₂	28								
100 km	.8ρ ₆₂	26								
	ρ ₆₂	30								
	1.2ρ ₆₂	32								
80 km	.8ρ ₆₂	-		44						
	ρ ₆₂	-		49						
	1.2ρ ₆₂	-		52						
70 km	.8ρ ₆₂	-		-	33	44	59	84	124	198
	ρ ₆₂	-		-	37	51	69	96	142	218
	1.2ρ ₆₂	-		-	39	54	74	106	156	232

Table 1. Time of Fall in Seconds through Standard Atmosphere and + 20% Deviations from Standard for Sphere Apogees Between 70 and 150 Km

of the parameters used to compute λ . For a two percent noise error in density, the 3σ noise tolerance for λ is $3\sigma_\lambda = \frac{.08484}{\Delta z}$.

The check is summarized as follows:

Expected value of $\lambda = .00014$;

Tolerance for variation in density is $\pm .00005$; and

3σ noise tolerance is $\pm \frac{.08484}{\Delta z}$, Δz is in units of meters.

A sphere is considered inflated if:

$$.00014 - \left[(.00005)^2 + \left(\frac{.08484}{\Delta z} \right)^2 \right]^{1/2} \leq \lambda \leq .00014 + \left[(.00005)^2 + \left(\frac{.08484}{\Delta z} \right)^2 \right]^{1/2}$$

If the λ check fails, the message "Density Gradient Exceeds Nominal Value" appears in the printout. The λ check is the secondary balloon collapse check and should be used in conjunction with the time of fall tests. The λ check is a sensitive check and occasionally can be tripped by a vertical wind or density anomaly not connected with sphere collapse. In this case the error message will appear only sparingly and the time of fall test will validate proper balloon inflation. When sphere collapse is indicated by the time of fall test over say a 5 Km interval, the λ check will often pinpoint the actual collapse within an accuracy of 1 Km. If a non-ROBIN sphere is used, the λ check serves as the only indication of sphere collapse.

Density Errors

Sources which can produce significant density errors are as follows.

- a) Random error in density due to radar noise.
- b) Bias error in density introduced by smoothing function.
- c) Error in initial guess at temperature.
- d) Drag coefficient errors.
- e) Vertical winds.

a) Noise Error in Density

The random error in density is that error resulting from noise in the radar signal. The magnitude of this error for a nominal 115 Km apogee and the 19-21 linear cubic smoothing (expanding to 51-21) used on density is given by the first line of Table 2. The two percent noise error in density is maintained below 60 Km by gradually expanding the smoothing interval from 19-21 to 51-21 linear cubic. The RMS noise error in density is computed in the ROBIN program by assuming an RMS error of 0.15 mil in azimuth and elevation angles and 6 meters in slant range. The RMS error value printed out by the program may differ slightly from that given in Table 2 due to a different sphere apogee and trajectory.

b) Bias Errors in Density

A bias error is introduced into density when the smoothing function does not fit true perturbations in the position coordinates. Incorporated into the 1977 program is a bias removal technique that will remove the bias error resulting from a sphere flight through the 1976 Standard Atmosphere. Since an actual atmosphere will differ somewhat from the "76" Standard, not all of the bias will be removed. The second row of Table 2 shows typical values of the unremoved bias based upon simulated flights through other atmospheres.

c) Initial Guess of T_0

A guess of the temperature at the initial altitude of thermodynamic computations (approximately 95 Km) is required. This temperature error produces a density error in succeeding computation which decreases with altitude. The percent error in density produced by a ten percent error in the initial temperature at 95 Km is given by Table 2. The effect of this error becomes negligible after 5 Km of flight.

d) Drag Coefficient Errors

Errors in the drag coefficient effect density accuracy in two ways: a) drag coefficient error directly produces density errors since C_D is in the formula used to compute density; and b) an

	95	90	85	80	75	70	65	60	55	50	40	30
Noise Error	8	4	1	1	1	1	2	2	2	2	2	2
Unremoved Bias Error	1	1	1	1	1	1	1	1	less than 1/2%			
Error due to 10% error in T_0	3	1	less than 1/2%		1/2%							
Error from C_D	2	2	1	1	1	1	1	1	1	1	1	1
Error from 1 m/sec vertical wind	2								.7	1	4	9
Error from 5 (K) wavelength	5	less than 1/2%					7	1	1	2	5	10
Error from 10	10					.6	1	1	1.	2	5	10

Table 2. Percent Error in Density from Various Sources for Sphere with Apogee 115 Km.

error in C_D produces a density error which in turn produces an error in Reynolds and Mach numbers so that the Reynolds and Mach numbers used to determine C_D puts one in the wrong region of the drag table.

The drag table used in the 1977 ROBIN program is based upon Bailey and Hiatt's (Reference 1) ballistic sphere measurements with revision in the subsonic region recommended by the Datasonde-sphere comparisons study of Engler and Luers (Reference 2). Bailey and Hiatt quote a maximum error of two percent throughout the observational range. With the revisions due to comparison with other sensors, it is believed that the drag table accuracy in some regions is greater than two percent. Table 2 gives the best estimate of density errors resulting from inaccuracies in the drag table.

e) Vertical Winds

In order to compute density from a passive sphere, one must assume no vertical winds. Actual vertical winds will produce fictitious density perturbations. The percent error in density produced by a 1 m/sec vertical wind of wavelength 2 to 10 Km is given in Table 2. To obtain the percent density error produced by vertical winds of some other magnitude, say X m/sec, the entries in Table 2 are multiplied by X.

Pressure Errors

Pressure is computed in the ROBIN program by an integration of density. Hence errors in pressure can result from all sources of density error.

a) Noise Error in Pressure

The percent error in pressure resulting from the noise errors in density is given in Table 3. This error is printed in the computer output. It may differ slightly from the values given in Table 3 due to a different sphere apogee and trajectory.

b) Bias Errors in Pressure

The percent bias error in pressure resulting from the unremoved bias in density is given by line 2 of Table 3.

	95	90	85	80	75	70	65	60	55	50	40	30
Noise Error	2	1	less than 1/2%									
Unremoved Bias Error	1	1	1	1	1	1	less than 1/2%					
Error due to 1.0% error in T_0	5	2	less than 1/2%									

Table 3. Percent Error in Pressure for Sphere with Apogee 115 Km

The bias in pressure due to a ten percent error in the initial temperature is given by line 3 of Table 3.

Error in pressure due to drag coefficient errors or vertical winds cannot be directly calculated. Since pressure is computed by integrating density, the error in pressure resulting from C_D errors depends upon the entire C_D error profile. If C_D errors are biased, say all positive, the effect on density error will be greater than if the same magnitude C_D errors are randomly positive and negative. Since the type C_D error profile is beyond the present state of knowledge, pressure errors resulting from C_D errors cannot be estimated.

The effect of vertical winds on pressure accuracy depends upon the vertical wind profile of the entire atmosphere. Since this information is also beyond present knowledge, the pressure error produced by vertical winds cannot be estimated.

Temperature Errors

Temperature is computed by the gas law from density and pressure. Hence, the sources of temperature errors are all the sources of density errors. The relationship between temperature, density, and pressure errors is indicated by the formula:

$$\frac{dT}{T} = \frac{dp}{p} - \frac{d\rho}{\rho} . \quad (1)$$

Hence, the temperature error profile is obtained from the density error profile and the pressure error profile produced by the density error profile.

a) Noise Error in Temperature

The error in temperature due to the noise error in density is given by Table 4, line 1. The noise error in temperature appears in the computer output of the program. The unremoved bias error in the density profile due to smoothing produces a bias in temperature. The second line in Table 4 shows this error.

The effect of a ten percent error in the initial temperature on succeeding temperature calculations is also given

	95	90	85	80	75	70	65	60	55	50	40	30
Noise Error	15°	7°	3°	1°	1°	1°	3°	3°	4°	4°	4°	4°
Unremoved Bias Error	2°	2°	2°	2°	2°	2°	1°	1°	Less than 1°	Less than 1°		
Error due to 10% error in T_0	15°	4°	1°	Less than 1°								

Table 4. Degree Error in Temperature for Sphere with Apogee 115 Km

in Table 4. After 10 Km of flight, the effect of the ten percent error has decreased to a 1° error in temperature.

The effect of C_D errors and vertical winds on temperature depends upon their effect on pressure. Since the bias C_D error profile and vertical wind profile are unknowns, the resulting pressure and temperature errors cannot be estimated. One point of interest is worth mentioning. If all drag coefficients are biased by a constant percent error, this will produce the same percent error in density and pressure, and hence, by Equation 1, will result in no error in the temperature. It is a changing bias error in C_D that will detrimentally affect temperature.

Frequency Response of Thermodynamic Data

The amount of detail that can be observed in the thermodynamic output data is determined by the frequency response of the density filter. Table 5 gives the percent of the amplitude of a 1,2,5, 10 and 20 Km sinusoidal wave in density that is retained in the output data. For example, at 70 Km a 10 Km density perturbation with amplitude X would appear in the computer printout as having amplitude .72X.

Wind Errors

The only significant sources of wind error are the noise and bias errors in velocity and acceleration resulting from the smoothing process. For a sphere apogee of 115 Km, the one sigma noise error in a wind component is estimated in Table 6. The computer program calculates the noise error in each wind component and includes both in the printout.

Frequency Response of Wind Data

The bias error in winds introduced by the smoothing function depends on the wind field itself and hence varies from flight to flight. The frequency response of the wind filter determines the degree of bias that will occur for various wavelengths. Table 7 presents this frequency response. For example, from Table 7 it

	95	90	85	80	75	70	65	60	55	50	40	30
Noise Error in wind component	35	13	5	2	2	2	1	1	less than	1 m/sec		

Table 6. Noise Error in Wind Component for a Sphere with Apogee 115 Km

RATIO OF AMPLITUDE OF SMOOTHED SINUSOIDAL WIND TO AMPLITUDE OF
ORIGINAL WIND AS A FUNCTION OF ALTITUDE AND WAVELENGTH.
(ALTITUDE AND WAVELENGTH MEASURED IN KILOMETERS.)

		ALTITUDE									
		x 10C	x 90	x FC	x 70	x 60	x 50	x 40	x 30		
		XX									
		x	x	x	x	x	x	x	x	x	x
A	1	0.01	0.01	0.01	0.01	0.01	0.02	0.57	0.96		
V											
E	2	0.01	0.01	0.01	0.03	0.10	0.40	0.76	0.99		
L											
E	5	0.02	0.03	0.06	0.16	0.70	0.93	0.99	0.99		
A											
C	10	0.14	0.17	0.24	0.85	0.97	0.99	0.99	0.99		
T											
F	20	0.58	0.63	0.66	0.90	0.98	0.99	0.99	0.99		

Table 7. Frequency Response of Wind Data

is observed that at 70 Km a 10 Km sinusoidal wave in the wind field will appear in the computed output to have only 85 percent of its true amplitude.

REFERENCES

- 1) Bailey, A.B. and Hiatt, J., "Free Flight Measurements of Sphere Drag at Subsonic, Transonic, Supersonic and Hypersonic Speeds for Continuum, Transition and Near-Free-Molecular Flow Conditions," AEDC-TR-70-291, Van Karman Gas Dynamics Facility, Arnold Engineering Development Center. Air Force Systems Command, Arnold Air Force Station, Tennessee, March 1971.
- 2) Engler, N.A., and Luers, J.K., "Modifications to the 1972 ROBIN Program" (to be published), Prepared for US Army Atmospheric Sciences Laboratory, White Sands Missile Range, New Mexico, February 1978.
- 3) Luers, J.K., and MacArthur, C.D., "Optimum Radars and Filters for the Passive Sphere System," NASA CR-111952. Revised Edition, October 1975.
- 4) Engler, N.A., "Development of Methods to Determine Winds, Density, Pressure and Temperature from the Robin Balloon," UDRI, AFCRL-65-448.
- 5) Luers, J.K., "A Method of Computing Winds, Density, Temperature Pressure and Their Associated Error from the High Altitude ROBIN Sphere using an Optimum Filter," UDRI AFCRL-70-0366, July 1970.