

AD-A080 545

NAVAL RESEARCH LAB WASHINGTON DC
A SHEAR STABILIZED CYLINDRICALLY SYMMETRIC MIRROR PLASMA.(U)
DEC 79 W M MANHEIMER
NRI-MR-4144

F/G 20/9

UNCLASSIFIED


SBIE-AD-E000 357

NL

OF
AD
A080545



END
DATE
FILMED
3-80
DDC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

LEVEL III

12
B.S.

ade 000357

NRL Memorandum Report 4144


ADA 080545

A Shear Stabilized Cylindrically Symmetric Mirror Plasma

W. M. MANHEIMER

*Plasma Theory Branch
Plasma Physics Division*

December 21, 1979



NAVAL RESEARCH LABORATORY
Washington, D.C.

Approved for public release; distribution unlimited.

80 1 28 088

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 4144	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) <u>A SHEAR STABILIZED CYLINDRICALLY SYMMETRIC MIRROR PLASMA</u>	5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) W. M. Manheimer	8. CONTRACT OR GRANT NUMBER(s) 11 Dec 79	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, DC 20375	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NRL Problem 67-0896-0-0 EX-76-A-34-1006	
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Department of Energy Washington, DC 20545	12. REPORT DATE December 21, 1979	13. NUMBER OF PAGES 6
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 14 NRL-MR-4144	15. SECURITY CLASS. (of this report) UNCLASSIFIED	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. 18 SBIE 19 AD-E000 357		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 13 7		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Mirror plasma Shear stabilization		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This memorandum report examines the possibility of shear stabilization of a cylindrically symmetric mirror plasma.		

DD FORM 1473 1 JAN 73 EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

252 950

slk

Accession For	NTIS GRA&I	DDC TAB	Unannounced Justification	By	Distribution/	Availability Codes	Availand/or special
							Dist A

A SHEAR STABILIZED CYLINDRICALLY SYMMETRIC MIRROR PLASMA

In order to avoid flute instabilities, magnetic mirror plasmas are almost always confined in minimum B configurations.^{1,2} While these configurations are MHD stable, they are not cylindrically symmetric. However cylindrically symmetric configurations have certain advantages in that the coil structures are much simpler. Also it might be possible to compress a cylindrically symmetric mirror confined plasma with an imploding liner. This note proposes such a cylindrically symmetric MHD stable mirror plasma.

The idea is to use shear stabilization rather than minimum B. This essentially means running a current through the center of the mirror field.

To analyze this, model the flute instability by a simple g mode. Let us assume a 2:1 mirror ratio so the radius of the plasma at the midplane is larger by $\sqrt{2}$ than at the mirror neck, as shown in Fig. 1. Model the field line by

$$y = r_0 + 0.15 r_0 \cos \frac{2\pi x}{L} . \quad (1)$$

Then the minimum radius of curvature R (at midplane) is $1/R = 0.15 r_0 \left(\frac{2\pi}{L} \right)^2$. This corresponds to the most unstable gravity.

Note: Manuscript submitted October 30, 1979.

Then say

$$g = \frac{v_1^2}{R} = 0.15 v_1^2 r_o \left(\frac{2\pi}{L} \right)^2 \quad (2)$$

Now the Suydam style criterion^{3,4} for stabilizing g modes is

$$4\pi g \frac{\partial \rho_o}{\partial x} L_s^2 / B_o^2 \approx \frac{4\pi g \rho_o L_s^2}{r_o B_o^2} < \frac{1}{4} \quad (3)$$

where L_s is the shear length

$$L_s^{-1} \approx \frac{B_\theta}{B_z} \frac{1}{q} \frac{dq}{dr} \quad (4)$$

and

$$q = \frac{2\pi B_z r}{B_\theta L} \quad (5)$$

If the current all flows within a radius a , $B_\theta = B_\theta(a) \frac{a}{r}$ so

$$L_s^{-1} \approx \frac{2 B_\theta}{B_z r} \quad (6)$$

Taking $r = r_o$ the shear stabilization condition becomes

$$8\pi \rho v_1^2 (0.15) \left(\frac{2\pi r_o}{L} \right) < B_\theta^2 \quad (7)$$

If $n = 10^{13}$, $T_1 = 1$ KeV, $R_o = 2$ cm, $L = 40$ cm like the plasma in Ref. 2, we find,

$$B_\theta(r_o) = 200 \text{ G}, \quad (8)$$

since $B_\theta = I/5r_0$ that this means a current down the center

$$I \quad 2K \text{ Amps.} \quad (9)$$

which is a relatively modest current.

This current could come from a wire or discharge down the middle. If the latter, the discharge itself must be MHD stable also. If the electrode radius (assumed to be at mirror neck) is 0.7 cm and current radius is $a = 1$ cm at midplane, then if $I = 2$ kA amps and $B_0 = 10$ kG,

$$q(a) = \frac{aB_0}{\frac{L}{2\pi} B_\theta(a)} = \frac{10\pi a^2 B_0}{I L} \approx 7.5 \quad (10)$$

so the discharge should be stable.⁵ if it has a diffuse profile.

The appealing thing about this theory is that it utilizes only a single concept, shear stabilization of a mirror plasma. This could be tested on a relatively small low cost experiment like that of Ref. 2. If it works, one then has the option of using a minimum B configuration if cylindrical symmetry is unimportant, or a shear stabilized configuration if cylindrical symmetry is important.

Acknowledgment

The author would like to thank Dr. A. E. Robson for very useful discussions. This work was supported by the U. S. Department of Energy.

References

1. F. H. Coensgen, J. F. Clauser, D. L. Correll, W. F. Cummins, C. Gormezano, B. G. Logan, A. M. Molvik, W. E. Wexsen, T. C. Simonen, B. W. Stallard and W. C. Turner, Plasma Physics and Controlled Nuclear Fusion Research 1976, p. 135 (IAEA, 1977).
2. R. G. Tomlinson, W. J. Fader, D. H. Polk and J. H. Stufflebeam, Phys. Fluids 22, 556 (1979).
3. B. R. Suydam, Proc. U.N. Intern. Conf. Peaceful Uses At. Energy, 2nd, Geneva, 1958, Vol. 31, p. 157-159.
4. W. Manheimer, NRL Memorandum Report 4000, June 1979.
5. J. A. Wesson, Nucl. Fusion 18, 87 (1978).

Fig. 1. Schematic of a shear stabilized mirror plasma.

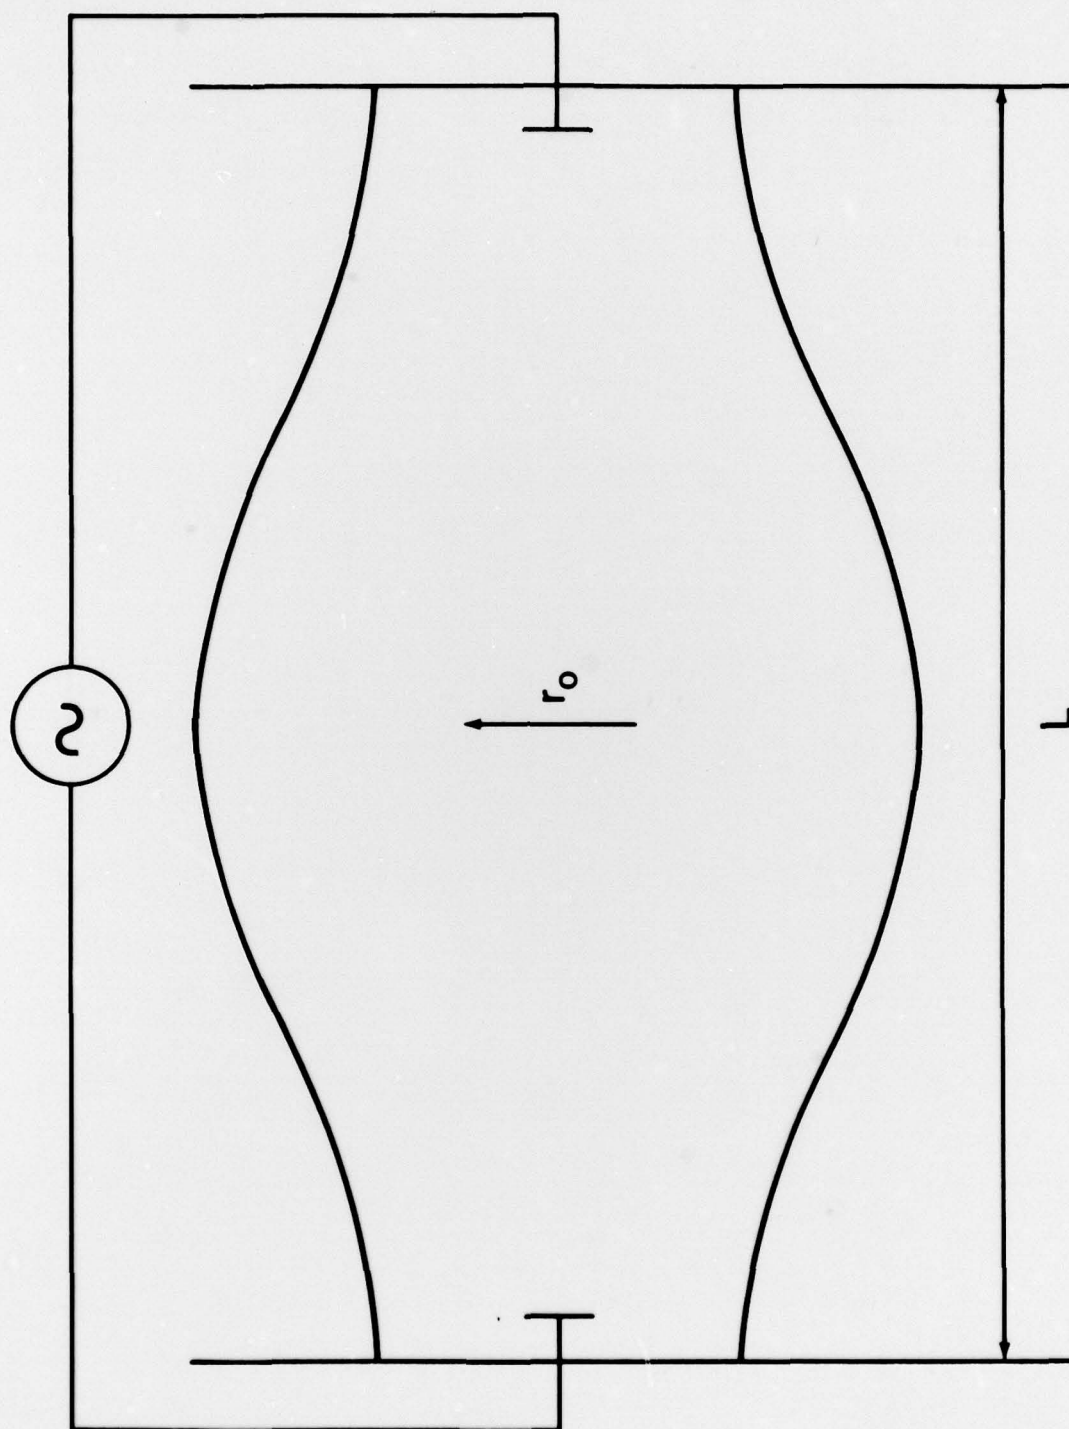


Fig. 1 - Schematic of a shear stabilized mirror plasma