

AD-A082 415 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
INCIRLIK AB, ADANA, TURKEY. REVISED UNIFORM SUMMARY OF SURFACE --ETC(U)
MAR 77

UNCLASSIFIED USAFETAC/DS-80/023 NL

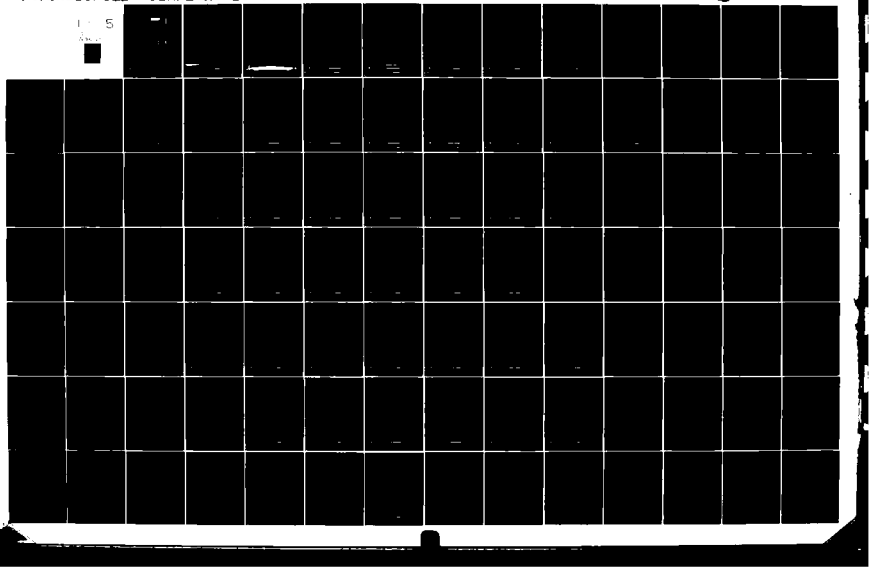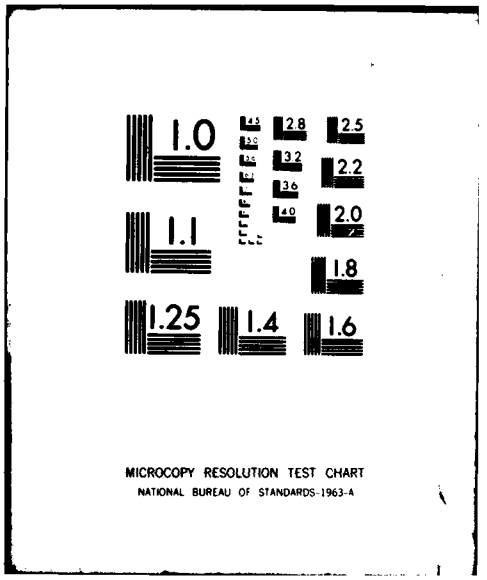


1.0
1.1
1.25
1.4
1.6
2.8
3.2
3.6
4.0
2.5
2.2
2.0
1.8
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

PHOTOGRAPH THIS SHEET

AD A082415

DTIC ACCESSION NUMBER

LEVEL

[redacted]

ATTENTION:
Camera Operator
When Filming attached document
use Roll & Result camera ONLY!!!
Consult with Supervisor for
further instructions.

INVENTORY

USAFETAC/DS-80/023

DOCUMENT IDENTIFICATION

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

DISTRIBUTION STATEMENT

ACCESSION FOR	
NTIS	GRA&I
DTIC	TAB
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION /	
AVAILABILITY CODES	
DIST	AVAIL AND/OR SPECIAL
A	

DISTRIBUTION STAMP

DTIC
ELECTE
S APR 1 1980 D
D

DATE ACCESSIONED

80 3 31 094

DATE RECEIVED IN DTIC

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-DDA-2

DTIC FORM 70A OCT 79

DOCUMENT PROCESSING SHEET

USAFETAC/DS-80/023

DATA PROCESSING BRANCH
USAFETAC
Air Weather Service (MAC)

REVISED UNIFORM SUMMARY OF SURFACE WEATHER OBSERVATIONS

INCIRLIK AB TURKEY/ADANA WBAN# 33308
N 37 00 E 035 26 FLD ELEV 240 FT TAG WMO# 17350

PARTS A-F

POR FROM HOURLY OBS: SEP 66-NOV 76
POR FROM DAILY OBS: MAY 55-OCT 68

"THIS DOCUMENT HAS BEEN APPROVED FOR PUBLIC RELEASE AND SALE; ITS DISTRIBUTION IS UNLIMITED."

MAR 15 1977

FEDERAL BUILDING
ASHEVILLE, N. C.

AD A082415

Review and Approval Statement

This report is approved for public release. There is no objection to unlimited distribution of this report to the public at large, or by DDC to the National Technical Information Service (NTIS).

This technical report has been reviewed and is approved for publication.

Carl A. Bower Jr.

CARL A. BOWER, JR.
Chief, Data Reference Section
Climatological Services Branch

FOR THE COMMANDER

Walter S. Burghann

WALTER S. BURGHANN
Scientific & Technical
Information Officer

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER USAFETAC/DS- 80/023	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Revised Uniform Summary of Surface Weather Observations (RUSSWO)- Incirlik AB, Adana, Turkey		5. TYPE OF REPORT & PERIOD COVERED Final rept. 6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS USAFETAC/OL-A Air Force Environmental Technical Appl. Center Scott AFB IL 62225		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS USAFETAC/CBD Air Weather Service (MAC) Scott AFB IL 62225		12. REPORT DATE 15 Mar 77 13. NUMBER OF PAGES p.
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

*RUSSWO	Daily temperature	Atmospheric pressure
Snowfall	Extreme snow depth	Extreme surface winds
Climatology	Sea-level pressure	Psychrometric summary
Surface Winds	Extreme temperature	Ceiling versus visibility
Relative humidity	*Climatological data	(over)

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This report is a six-part statistical summary of surface weather observations for Incirlik AB, Adana, Turkey

It contains the following parts: (A) Weather Conditions; Atmospheric Phenomena; (B) Precipitation, Snowfall and Snow Depth (daily amounts and extreme values); (C) Surface winds; (D) Ceiling Versus Visibility; Sky Cover; (E) Psychrometric Summaries (daily maximum and minimum temperatures, extreme maximum and minimum temperatures, psychrometric summary of wet-bulb temperature depression versus [illegible] of dry-bulb, wet-bulb (over)

19. Percentage frequency of distribution tables
Dry-bulb temperature versus wet-bulb temperature
Cumulative percentage frequency of distribution tables

* Turkey * Incirlik AB, TU

20. and dew-point temperatures and relative humidity); and (F) Pressure Summary (means, standard, deviations, and observation counts of station pressure and sea-level pressure). Data in this report are presented in tabular form, in most cases in percentage frequency of occurrence or cumulative percentage frequency of occurrence tables.

THE EXTREME VALUES COULD CONTAIN SUSPECT OR QUESTIONABLE DATA. SUCH CASES USUALLY APPEAR IN THE TABULATIONS AS A PERCENTAGE FREQUENCY OF ".0", WHICH USUALLY INDICATES ONLY ONE OCCURRENCE. THESE MAY OR MAY NOT BE COMPLETELY VALID, BUT THE USER SHOULD NOT DISREGARD THEM ENTIRELY. OBVIOUS ERRORS OR IMPOSSIBLE CONDITIONS HAVE BEEN LINED THROUGH IN BLACK INK.

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

REVISED UNIFORM SUMMARY
OF SURFACE WEATHER OBSERVATIONS

HOURLY OBSERVATIONS

Hourly observations are defined as those record or record-special observations recorded at scheduled hourly intervals.

DAILY OBSERVATIONS

Daily observations are selected from all data recorded on reporting forms and combined into Summary of the Day observations. (Selected from record-special, local, summary of the day, remarks, etc.)

DESCRIPTION OF SUMMARIES

Preceding each section is a brief description of the data comprising each part of the Revised Uniform Summary of Surface Weather Observations and the manner of presentation. Tabulations are prepared from hourly and daily observations recorded by stations operated by the U. S. Services and some foreign stations using similar reporting practices.

Unless otherwise noted the following summaries are included for this station:

PART A WEATHER CONDITIONS
ATMOSPHERIC PHENOMENA

PART B PRECIPITATION
SNOWFALL
SNOW DEPTH

PART C SURFACE WINDS

PART D CEILING VERSUS VISIBILITY
SKYCOVER

PART E DAILY MAX, MIN, & MEAN TEMP
EXTREME MAX & MIN TEMP
PSYCHROMETRIC-DRY VS WET BULB
MEAN & STD DEV .
(DRY BULB, WET BULB, & DEW POINT)
RELATIVE HUMIDITY

PART F STATION PRESSURE
SEA LEVEL PRESSURE

STANDARD 3-HOUR GROUPS

All summaries requiring diurnal variations are summarized in eight 3-hour periods corresponding to the following sets of hourly observations: 0000-0200, 0300-0500, 0600-0800, 0900-1100, 1200-1400, 1500-1700, 1800-2000, 2100-2300 hours local standard time.

MISSING HOUR GROUPS

Summary sheets are omitted when stations maintaining limited observing schedules did not report certain three-hour periods for any particular month during the available period of record. Such missing sheets are listed below, and are applicable to all summaries prepared from hourly observations.

JANUARY_____	APRIL_____	JULY_____	OCTOBER_____
FEBRUARY_____	MAY_____	AUGUST_____	NOVEMBER_____
MARCH_____	JUNE_____	SEPTEMBER_____	DECEMBER_____

574-2004B

STATION NO ON SUMMARY	STATION NAME	LATITUDE	LONGITUDE	FIELD ELEV (FT.)	CALL SIGN	WMO NUMBER
33308	INCIRLIK AB TURKEY/ADANA	N 37 00	E 035 26	239	LTAG	17350

STATION LOCATION AND INSTRUMENTATION HISTORY

NUMBER OF LOCATION	GEOGRAPHICAL LOCATION & NAME	TYPE OF STATION	AT THIS LOCATION		LATITUDE	LONGITUDE	ELEVATION ABOVE MSL		OBS PER DAY
			FROM	TO			FIELD (FT)	HT. BARO.	
1	Incirlik Air Base	AB	Mar 55	Mar 57	N 37 00	E 035 26	234	216	24
2	Same	Same	Apr 57	Mar 58	Same	Same	228	Same	24
3	Same	Same	Apr 58	Mar 62	Same	Same	238	265	24
4	Same	Same	Apr 62	Mar 65	Same	Same	244	254	24
5	Same	Same	Apr 65	Mar 66	Same	Same	238	Same	24
6	Same	Same	Apr 66	Mar 68	Same	Same	232	265	24
7	Same	Same	Apr 68	Oct 68	Same	Same	239	Same	24

NUMBER OF LOCATION	DATE OF CHANGE	SURFACE WIND EQUIPMENT INFORMATION				REMARKS, ADDITIONAL EQUIPMENT, OR REASON FOR CHANGE
		LOCATION	TYPE OF TRANSMITTER	TYPE OF RECORDER	HT ABOVE GROUND	
1	Mar 55	N/A	N/A	N/A	N/A	
2	Apr 56	Located on top of control tower	AN/GMQ-1[illegible]	Same	67 ft	
3	Apr 57	Same	Same	Same	80 ft	
4	Apr 58	Same	Same	Same	75 ft	
5	Apr 61	Located 250 ft W of taxiway C, 250 ft N of main taxiway	AN-GMQ-1[illegible]	RO2	13 ft	
6	Apr 66	Located 1500 ft from end of rnwy 05 & 500 ft SE of centerline	Same	Same	Same	
7	Nov 68	N/A	N/A	N/A	N/A	

USAFETAC NOV 73 C-9 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. CONTINUED ON REVERSE SIDE

NUMBER OF LOCATION	DATE OF CHANGE	SURFACE WIND EQUIPMENT INFORMATION				REMARKS, ADDITIONAL EQUIPMENT, OR REASON FOR CHANGE
		LOCATION	TYPE OF TRANSMITTER	TYPE OF RECORDER	HT ABOVE GROUND	

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

A

PART A WEATHER CONDITIONS

This summary is a percentage frequency occurrence of various atmospheric phenomena and obstructions to vision, derived from hourly observations, and is presented in two tables as follows:

1. By month and annual, all hours and years combined.

2. By month, all years combined, by standard 3-hour groups.

A percent value of ".0" in these tables indicates less than .05 percent, which is usually only one occurrence. The various phenomena included in each category on the forms are listed below:

Thunderstorms - All reported occurrences of thunderstorm, tornado, and waterspout.

Rain and/or drizzle - All liquid precipitation, falling to the ground, not freezing.

Freezing rain and/or freezing drizzle (glaze) - Precipitation falling in liquid form, but freezing on contact with an unheated surface.

Snow and/or sleet (ice pellets) - Included are snow, snow pellets, sleet, snow grains, ice crystals, and ice pellets from Jan 68 and later. (Snow pellets also known as soft hail)

Hail - Occurrences of hail and small hail are included.

Percentage of observations with precipitation - Included in this category are the observations when one or more of the above phenomena occurred. Since more than one type of precipitation may be reported in the same observation, the sums of the individual categories may exceed the percentages of the observations with precip.

Fog - Included are fog, ice fog, and ground fog.

Smoke and/or haze - Occurrences of smoke, haze, or combinations of smoke and haze are included.

Blowing snow - Occurrences of blowing snow (also drifting snow when reported from non-WBAN sources).

Dust and/or sand - Included are blowing dust, blowing sand, and dust.

Continued on Reverse

Blowing spray - This item if reported, is not shown in a separate category on this form but is included in the computation Percentage of Observations with Obstructions to Vision, below.

Percentage of observations with obstructions to vision - Included in this category are the observations when one or more of the above obstructions to vision occurred. Since more than one type of obstruction may be reported in the same observation, the sums of the individual categories may exceed the percentage total columns. Also, although precipitation may reduce visibility, it is not considered an obstruction to vision for purposes of this summary; therefore, the percentage total of obstructions to vision need not reflect the total observations with reduced visibility.

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

17304 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 64-74 YEARS — ALL MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	ALL	.4	10.6	.0	.4	.0	12.8	.1	.1		.0	.2	7[illegible]
FEB		.3	9.8		.0		9.8	.1	.1			.2	6247
MAR		1.0	7.2				7.2	.7	.9		.1	1.3	6[illegible]
APR		1.7	6.9			.0	6.9	1.3	1.0		.1	3.0	6447
MAY		1.9	3.6			.0	3.7	1.4	2.2		.0	3.5	6[illegible]
JUN		1.0	1.0				1.0	3.2	2.3		.1	5.5	6[illegible]
JUL		.3	.2			.1	.3	2.9	7.1			9.5	6247
AUG		.4	.4		.0		.4	3.3	5.4		.0	5.0	6529
SEP		.7	.7				.7	1.3	2.1			3.4	7094
OCT		1.3	2.3			.0	2.3	.1	.9		.1	1.1	7259
NOV		1.1	7.4			.0	7.4	.1	.5		.0	.7	7325
DEC		.8	9.7				9.7	.3	.5		.2	.9	6939
TOTALS		.9	5.0	.0	.0	.0	5.0	1.2	2.0		.1	3.2	80746

USAFETAC FORM JULY 64 0-10-8(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDUCTIONS

33203 (STATION) | I.CIRLIK AB TURKEY/ADANA (STATION NAME) | 67-76 (YEARS) | JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JA	00-02		11.4		.3		11.4	.1				.1	930
	03-05	.4	9.2		.2		9.5						922
	06-08	.1	9.3	.1	.4		9.5	.1	.1		.1	.2	913
	09-11	.1	10.3		.1		10.3	.1				.1	884
	12-14	.1	11.7				11.7	.2				.2	930
	15-17	.4	11.6		.4	.1	11.7	.4	.2			.7	895
	18-20	1.0	11.5		.2		11.6		.2			.2	902
	21-23	.7	10.8		.6		11.3						901
TOTALS		.4	10.6	.0	.4	.0	10.8	.1	.1		.0	.2	7180

USAFETAC FORM AWS 64 0-10-5(GL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

33306 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-74 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
FEB	00-02	.3	10.0				10.0						790
	03-05	.3	7.6				7.6	.1				.1	777
	06-08	.5	8.5				8.5	.5	.1			.6	787
	09-11	.1	9.5				9.5	.1	.3			.4	767
	12-14	.3	10.2				10.2	.1	.3			.4	783
	15-17		11.2				11.2						788
	18-20	.1	9.3				9.3	.1				.1	787
	21-23	.4	11.9		.3		12.2	.1				.1	788
TOTALS		.3	9.8		.0		9.8	.1	.1			.2	6267

USAFETAC FORM 0-10-5(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
APR	00-02	.7	7.9				7.9	.8				.8	826
	03-05	1.1	6.0				6.0	1.0	.4			1.3	828
	06-08	.5	6.9				6.9	1.0	1.5		.2	2.7	826
	09-11	.7	7.6				7.6	.7	1.2		.1	2.0	831
	12-14	1.2	8.4				8.4	.2	1.6		.4	2.2	835
	15-17	2.2	7.7				7.7	.7	1.3		.1	2.2	830
	18-20	.9	7.3				7.3	.4	.9		.1	1.4	845
	21-23	.7	5.7				5.7	.4	.1			.5	838
TOTALS		1.0	7.2				7.2	.7	.9		.1	1.6	6659

USAFETAC FORM JULY 64 0-10-5(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
APR	00-02	2.6	7.7				7.7	.7	.2			1.0	801
	03-05	.7	6.2				6.2	2.5	.7			3.2	812
	06-08	.4	5.8				5.8	3.9	2.9			6.6	805
	09-11	1.0	6.7				6.7	2.0	2.6			4.6	812
	12-14	2.4	9.1				9.1	.4	2.8		.1	3.3	794
	15-17	2.6	6.2			.1	6.3	.4	2.9		.4	3.6	804
	18-20	2.0	6.8				6.8	.1	.9		.2	1.2	810
	21-23	1.5	6.3				6.3	.2	.1		.2	.6	809
TOTALS		1.7	6.9			.0	6.9	1.3	1.6		.1	3.0	6447

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
MAY	00-02	1.6	1.9				1.9	.6	.2			.7	801
	03-05	.4	1.9				1.9	5.4	2.5		.1	7.6	792
	06-08	.9	3.8				3.8	3.5	4.3		.1	7.6	800
	09-11	1.7	4.9				4.9	1.0	3.8			4.8	809
	12-14	4.0	3.8			.1	4.0	.1	3.5			3.6	807
	15-17	3.5	4.9			.1	5.1	.1	2.8			2.9	792
	18-20	1.6	4.7				4.7	.2	.5			.7	805
	21-23	1.5	2.9				2.9		.1			.1	794
TOTALS		1.9	3.6			.0	3.7	1.4	2.2		.0	3.5	6400

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

333x8 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-74 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JUL	00-02	1.5	.9				.9	.3				.3	796
	03-05	1.0	.5				.5	7.6	1.3			9.8	785
	06-08	.4	.4				.4	9.5	4.1			13.6	801
	09-11	.6	.6				.6	2.7	4.3		.1	7.1	813
	12-14	1.6	1.6				1.6	2.1	4.0			6.2	796
	15-17	1.5	1.8				1.8	1.8	3.5		.3	5.4	798
	18-20	.9	1.2				1.2	1.4	.7			2.1	803
	21-23	.6	.6				.6	.3	.1			.4	798
TOTALS		1.0	1.0				1.0	3.2	2.3		.1	5.5	6390

USAFETAC FORM JULY 64 0-10-5(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JUL	00-02	.1	.1				.1	.4	1.5			1.7	776
	03-05	.3	.4				.4	8.6	9.8			16.9	750
	06-08		.1				.1	10.1	13.2			21.8	774
	09-11	.1	.4				.4	1.0	11.2			13.2	774
	12-14	.6	.3				.3	.5	10.3			10.8	794
	15-17	.3	.3			.1	.4	.5	8.7			9.2	792
	18-20	.6				.3	.3		1.9			1.9	791
	21-23							.4	.3			.6	788
TOTALS		.3	.2			.1	.3	2.8	7.1			9.5	6247

USAFETAC FORM 0-10-8(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

~~32308~~ STATION ~~I.CIRLIK AB TURKEY/ADANA~~ STATION NAME ~~67-76~~ YEARS ~~ANN~~ MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
AUG	00-02	.2	.1				.1	.2	1.0		.2	1.5	819
	03-05	.1	.2				.2	6.6	7.5			14.0	808
	06-08		.2				.2	11.1	10.7			21.5	813
	09-11							4.0	8.2			12.3	816
	12-14	.6	.4				.4	2.3	7.5			9.6	830
	15-17	.5	.7		.1		.9	1.4	6.2			7.5	812
	18-20	1.1	1.0				1.0	.5	1.5			2.0	816
	21-23	.5	.4				.4		.4		.1	.5	825
TOTALS		.4	.4		.0		.4	3.3	5.4		.0	8.6	6529

USAFETAC FORM 0-10-5(GL, A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

32308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
SEP	00-02	1.0	.9				.9						882
	03-05	.6	.2				.2	.7	.9			1.6	889
	06-08	.3	.5				.5	6.4	3.8			8.1	808
	09-11	.2	.7				.7	3.1	4.0			7.2	894
	12-14	1.0	1.2				1.2	1.5	4.1			5.5	808
	15-17	1.1	1.0				1.0	.6	4.0			4.5	881
	18-20	.6	.6				.6	.1	.2			.3	899
	21-23	.8	.6				.6	.2				.2	893
TOTALS		.7	.7				.7	1.3	2.1			3.6	7096

USAFETAC FORM 0-10-8(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

32308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-70 YEARS | 01 MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	00-02	2.1	2.8				2.8		.2			.2	893
	03-05	.9	1.3				1.3	.3	.6			.9	904
	06-08	.6	2.1				2.1	.3	1.3		.1	1.8	909
	09-11	1.0	2.5			.1	2.6	.3	2.0			2.3	915
	12-14	1.3	2.3				2.3		2.1		.1	2.2	921
	15-17	2.1	3.6				3.6		1.3		.3	1.6	913
	18-20	1.7	1.4				1.4	.1				.1	909
	21-23	1.0	2.1				2.1						905
TOTALS		1.3	2.3			.0	2.3	.1	.9		.1	1.1	7269

USAFETAC FORM AWS 64 0-10-5(GL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

33306 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
NOV	00-02	1.3	7.1				7.1	.2	.1			.3	925
	03-05	1.0	7.1				7.1						929
	06-08	1.1	6.9				6.9	.3	.3			.6	925
	09-11	.7	7.7				7.7		.9			.9	915
	12-14	1.0	7.6				7.6		.9		.1	1.0	892
	15-17	1.1	6.7			.1	6.8	.2	1.4			1.7	907
	18-20	1.2	8.0				8.0	.2	.6			.8	909
	21-23	1.3	8.0				8.0	.2			.1	.3	923
TOTALS		1.1	7.4			.0	7.4	.1	.5		.0	.7	7325

USAFETAC FORM 0-10-5(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

33708 — STATION
I.CIRLIK AB TURKEY/ADANA — STATION NAME
6-7 — YEARS
06 — MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
DEC	00-02	.7	8.6				8.6	.1			.6	.6	881
	03-05	.8	9.5				9.5	.6	.3			.7	876
	06-08	.8	9.3				9.3	.6	.5			.7	857
	09-11	.9	9.6				9.6	.6	.8		.1	1.5	853
	12-14	.3	9.4				9.4	.1	.8		.3	1.3	860
	15-17	1.0	9.0				9.0		.7		.3	1.0	865
	18-20	.7	10.9				10.9	.1	.7		.3	.9	868
	21-23	.9	11.3				11.3	.1	.1		.3	.5	879
TOTALS		.8	9.7				9.7	.3	.5		.2	.9	6939

USAFETAC FORM AWS 64 0-10-5(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PART A ATMOSPHERIC PHENOMENA

This summary is a presentation of the percentage of days with occurrence of various atmospheric phenomena. These data are obtained from all recorded information on the reporting forms or from hourly data and combined into a daily observation.

The descriptions of the phenomena in the Weather Conditions Summary above also apply for the categories summarized in these daily tabulations. However, it should be noted that in this summary the columns headed "% OF OBS WITH PRECIP" and "% OF OBS WITH OBST TO VISION" show the percentage of days rather than the percentage of observations. Since more than one type of precipitation or more than one type of obstruction may occur in the same daily observation, the sum of the values in the individual categories may differ from the total columns.

A percent value of ".0" in the table indicates less than .05 percent, which is usually only one occurrence.

This presentation is by month with annual totals, and is prepared with all years combined.

NOTES: (1) A day with rain and/or drizzle was not separately reported in the WBAN data prior to year 1949. Therefore, percentages in this column are restricted to the period Jan 1949 and later.

(2) A day with freezing rain and/or freezing drizzle is also properly reported as a day with rain and/or drizzle.

(3) A day with dust and/or sand is included in this summary only when visibility is reduced to less than 5/8 mile.

574-23069

DATA PROCESSING BRANCH
USAF ETAC
3 AIR WEATHER SERVICE/MAC

XXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXWEATHERXCONDITIONS
ATMOSPHERIC PHENOMENA

33308 INCIRLIK AB TURKEY/ADANA 65-68 ALL

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE OF DAYS WITH VARIOUS ATMOSPHERIC PHENOMENA
FROM DAILY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	DAILY	9.9	45.3		2.4	2.1	45.6	6.4	1.6			7.8	383
FEB		10.6	47.6		1.4	1.6	47.6	13.9	3.0			16.0	368
MAR		12.7	43.7		.5	1.2	43.7	6.9	5.0			10.7	403
APR		13.6	38.0			2.4	38.0	9.3	9.5			15.9	369
MAY		18.0	30.7			1.6	30.9	10.9	8.3			15.7	433
JUN		10.2	14.3			.5	14.3	14.5	12.4			20.7	420
JUL		2.5	5.5				5.5	21.2	26.3			33.2	434
AUG		1.8	3.5				3.5	10.8	21.9			27.2	434
SEP		8.8	12.6			.5	12.6	4.0	3.1			5.5	420
OCT		12.0	21.0			.5	21.0	3.2	1.8			3.9	434
NOV		10.0	25.4		.3	.5	25.4	1.0	4.6		.5	5.4	390
DEC		9.7	46.4		.2	1.0	46.4	10.9	3.0		.5	12.4	403
TOTALS		10.0	27.8		.4	1.0	27.9	9.5	8.4		.1	14.5	4901

USAFETAC FORM 0-10-5(OL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART B PRECIPITATION, SNOWFALL & SNOW DEPTH

B

This part of the Uniform Summary consists of eight summaries derived from daily observations as follows:

1. The first set presents, in three tables, the percentage frequency of various daily amounts of PRECIPITATION, SNOWFALL, and SNOW DEPTH. The daily amount summary is prepared by month and annual, all years combined, and includes percent of days with measurable amounts; percent of days having none, traces, and given amounts; and means, greatest and least monthly amounts. (The last three statistics are omitted from the snow depth summary because of their doubtful and limited value.) A total count of valid observations is given for months and annual. Stations are included in which a portion or all of the period may contain months with missing days. This will be noted on the summary pages. A percent value of ".0" in these daily amount tables indicates less than .05 percent which is usually only one occurrence.

2. The second set of three tables presents the extreme daily amounts, by individual year and month, of PRECIPITATION, SNOWFALL, and SNOW DEPTH for the entire period of record available. Also provided are the means and standard deviations for each month and annual (all months) and the total valid observation count. An asterisk (*) is printed in any year-month block when the extreme value is based on an incomplete month (at least one day missing for the month). When a month has valid observations reported but no occurrences, zeros are given in the tables as follows:

EXTREME DAILY PRECIPITATION	".00"	equals none for the month (hundredths)
EXTREME DAILY SNOWFALL	".0"	equals none for the month (tenths)
EXTREME DAILY SNOW DEPTH	"0"	equals none for the month (whole inches)

3. The third set of two tables provides the total monthly amounts of PRECIPITATION and SNOWFALL for each year-month and annual. Also prepared are the means, standard deviations, and total number of valid observations for each month and annual (all months). An asterisk (*) is printed in each data block if one or more days are missing for the month. No occurrences for a month are indicated in the same manner as in the extreme tables above. If a trace becomes the extreme or monthly total in any of these tables it is printed as "TRACE."

Continued on Reverse Side

NOTES: (1) The above studies may also be prepared for stations operating for less than full months for portions or all of the period of record. This may include stations operating 5 or 6 days a week and those with only random days missing. An asterisk (*) in the data blocks will give an indication that a month is incomplete. Please refer to Station History at front of book and observation counts in each summary to evaluate the amounts of data missing.

(2) Hail was included in snowfall occurrences in the summary of day observations prior to Jan 56, but these occurrences have been removed from snowfall category and counted as Hail in these summaries.

(3) Snow Depth was recorded and punched at various hours during the period available from U. S. operated stations. The hours used by each service for each period are as follows:

Air Force Stations:		U. S. Navy and National Weather Service (USWB)	
Beginning thru 1945	at 0800LST	Beginning thru Jun 52	at 0030GMT
Jan 46-May 47	at 1230GMT	Jul 52-May 57	at 1230GMT
Jun 57-present	at 1200GMT	Jun 57-present	at 1200GMT

74-00001

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF

(FROM DAILY OBSERVATIONS)

3 3830 BERLIN AP MARYLAND

STATION | STATION NAME | YEARS

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS.	MONTHLY AMOUNTS (INCHES)		
PRECIP.	NONE	TRACE	.01	.02-.05	.06-.10	.11-.25	.26-.50	.51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4					
SNOW-DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN	55.8	15.7	1.6	6.7	1.9	4.8	5.9	5.6	5.9					32.5	372	4.75	11.30	.61
FEB	50.5	15.2	1.6	5.7	4.1	7.3	6.0	6.0	3.5					34.2	368	3.72	10.45	.93
MAR	54.6	15.0	3.0	7.2	2.5	6.2	4.7	5.0	1.7					30.4	401	2.84	5.07	.13
APR	59.9	15.7	1.3	5.7	3.9	5.9	3.6	2.1	1.8	.3				24.4	389	2.21	6.29	.30
MAY	67.2	14.8	2.1	3.5	2.8	2.8	2.8	2.8	1.2	.5				18.0	433	2.27	7.14	TRACE
JUN	84.2	7.1	1.2	1.2	1.2	1.7	1.0	1.2	1.2					8.6	420	1.02	4.45	.00
JUL	94.7	3.5	.2	.2	.5	.5	.2		.2					1.8	433	.15	1.27	.00
AUG	95.6	2.8	.2	.8	.2	.5			.2					1.6	434	.15	1.75	.00
SEP	86.7	6.2	.2	1.0	1.7	2.6	1.2	.5						7.1	420	.42	1.16	.00
OCT	77.4	8.8	1.2	3.0	2.1	3.9	2.3	.9	.5					13.8	434	.90	2.49	.00
NOV	75.7	7.8	2.6	2.1	2.6	4.2	3.1	.8	.6	.3				16.4	383	1.40	6.55	.09
DEC	89.1	18.6	2.3	5.1	2.6	6.2	5.6	4.1	5.9	.5				32.3	390	5.13	13.43	.00
ANNUAL	71.2	10.3	1.8	3.5	2.2	3.9	3.0	2.6	1.9	.1				18.4	4877	34.96		

3210 WS FORM JUL 64 0-15-5 (OL.1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF/ETAC/OL A
AIR WEATHER SERVICE/MAC

EXTREME VALUES

PRECIPITATION

(FROM DAILY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 55-68 (YEARS)

24 HOUR AMOUNTS IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
55					.43	TRACE*	.28	.02	.00	.03	1.19	.99	
56	1.14	1.46	.35	.71	1.18	.12	.00	.11	.20	.43	.16	1.02	1.46
57	1.45	1.02	1.19	1.31	.83	.79	.00	.00	.94	.65	.30	3.60	3.60
58	1.82	.64	.98	.18	.25	.60	.07	.04	.32	.97	.36	1.38	1.82
59	2.07	.47	.13	1.24	TRACE	1.69	TRACE	1.75	.24	.35	.42	1.70	2.07
60	.70	.54	1.30	.52	1.35	.07	.14	TRACE	.19	.11	1.05	1.06	1.35
61	1.15	1.67	.65	.74	.71	TRACE	.00	.00	.40	1.13	.25	3.08	3.08
62	1.81	1.35	.87	.85	.79	.00	TRACE	.00	.00	.11	.08	2.09	2.09
63	.85	2.11	1.15	1.94	4.24	2.02	.17	.00	.09	.45	.37	.45	4.24
64	* .51	1.13	1.05	.55	.99	.49	.00	TRACE	.42	.00*	.00*	.00	1.13
65	1.73	2.00	1.81	.38	.42	.18	TRACE	.11	TRACE	.28	.45	1.71	2.00
66	* 2.05	.54	.96*	1.03	.77	.19	TRACE	TRACE	.21	1.37	.40	1.72	* 2.05
67	* 1.53	.85*	1.45	3.47*	4.52	.56	1.27	.00	.54	.32	3.48	1.05	* 4.52
68	1.78	1.15	.60	.30	1.68	.35	.01	.01	.29	.24			
MEAN	1.430	1.148	.961	1.017	1.297	.506	.139	.146	.274	.503	.635	1.527	2.451
S.D.	.516	.590	.454	.880	1.378	.628	.337	.463	.253	.406	.915	.984	1.135
TOTAL OBS.	372	368	401	389	433	420	433	434	420	426	383	390	4877

NOTE * (BASED ON < FULL MONTHS)

USAF ETAC FORM 0-80-6 (OL A)

DATA PROCESSING BRANCH
USAF/ETAC/OL A
AIR WEATHER SERVICE/MAC

EXTREME VALUES
MONTHLY PRECIPITATION
(FROM DAILY OBSERVATIONS)

33308 INCIRLIK AB TURKEY/ADANA 55-68
STATION STATION NAME YEARS

TOTAL MONTHLY PRECIPITATION IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV	DEC.	ALL MONTHS
55					.60	TRACE*	.36	.02	.00	1.15	2.78	1.94	
56	3.07	5.10	1.21	.97	2.27	.12	.00	.19	.32	.43	.29	2.03	16.00
57	1.92	2.77	3.37	4.05	2.36	1.55	.00	.00	1.16	.69	1.29	9.06	28.22
58	9.13	1.59	2.71	.45	.69	.68	.07	.04	.42	1.02	.56	2.31	19.67
59	9.59	.93	.13	2.48	TRACE	4.28	TRACE	1.75	.60	1.14	.96	4.72	26.58
60	1.76	1.34	4.54	1.54	2.97	.13	.14	TRACE	.19	.23	2.87	1.91	17.62
61	1.39	10.45	1.54	1.08	.90	TRACE	.00	.00	1.07	2.49	.42	13.43	32.77
62	2.52	6.10	1.51	1.23	1.73	.00	TRACE	.00	.00	.49	.11	10.34	24.03
63	6.25	5.37	3.28	5.86	7.14	4.45	.19	.00	.22	.82	.57	.91	35.06
64	* .61	4.02	3.04	1.19	1.54	1.12	.00	TRACE	.42	.00*	.00*	.00	*11.94
65	2.73	4.88	5.07	2.04	1.21	.32	TRACE	.11	TRACE	.93	.96	7.41	25.66
66	* 9.94	.96	3.69*	1.28	.79	.25	TRACE	TRACE	.22	1.50	.85	7.62	*27.10
67	* 1.53	1.82*	4.22	6.29*	5.60	.57	1.27	.00	.70	1.11	6.55	4.95	*34.61
68	11.30	2.98	2.64	.30	3.91	.85	.01	.01	.61	.62			
MEAN	4.749	3.716	2.842	2.212	2.265	1.023	.146	.151	.424	.901	1.401	5.125	24.938
S.D.	3.098	2.703	1.429	1.965	2.047	1.489	.340	.463	.371	.610	1.791	4.136	7.428
TOTAL OBS.	372	368	401	389	433	420	433	434	420	434	383	390	4877

NOTE * (BASED ON < FULL MONTHS)

USAF ETAC FORM AS 61 0-80-6 (OLA)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF

(FROM DAILY OBSERVATIONS)

3330 | INCIRLIK AB TURKEY/ADANA | [illegible]
STATION | STATION NAME | YEARS

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS.	MONTHLY AMOUNTS (INCHES)		
PRECIP.	NONE	TRACE	.01	.02-.05	.06-.10	.11-.25	.26-.50	.51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4					
SNOW-DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN	97.3	2.4	.3											.3	374	TRACE	.2	.0
FEB	98.6	1.4													368	TRACE	TRACE	.0
MAR	99.5	.5													403	TRACE	TRACE	.0
APR	100.0														389	.0	.0	.0
MAY	100.0														434	.0	.0	.0
JUN	100.0														420	.0	.0	.0
JUL	100.0														434	.0	.0	.0
AUG	100.0														434	.0	.0	.0
SEP	100.0														420	.0	.0	.0
OCT	100.0														434	.0	.0	.0
NOV	99.7	.3													390	TRACE	TRACE	.0
DEC	99.8	.2													403	TRACE	TRACE	.0
ANNUAL	99.6	.4	.0											.0	4903	.0		

1210 WS FORM AWS 0-15-5 (OL.1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF/ETAC/DL A
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOWFALL

(FROM DAILY OBSERVATIONS)

33308 INCIRLIK AB TURKEY/ADANA 55-68
STATION STATION NAME YEARS

24 HOUR AMOUNTS IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV	DEC	ALL MONTHS
55					.0	.0	.0	.0	.0	.0	.0	.0	
56	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	TRACE
57	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
58	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
59	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	.0	TRACE
60	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
61	.2	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.2
62	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
63	.0	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
64	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
65	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
66	.0	.0	.0*	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
67	* .0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
68	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0			
MEAN	.02	TRACE	TRACE	.00	.00	.00	.00	.00	.00	.00	TRACE	TRACE	.02
S.D.	.055	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.057
TOTAL OBS.	374	368	403	389	434	420	434	434	420	434	390	403	4903

NOTE * (BASED ON < FULL MONTHS)

USAF ETAC FORM 0-8-6 (OL-A)

DATA PROCESSING BRANCH
USAF/ETAC/OL A
AIR WEATHER SERVICE/MAC

XXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXX
MONTHLY SNOWFALL

(FROM DAILY OBSERVATIONS)

33308 INCIRLIK AB TURKEY/ADANA 55-68
STATION STATION NAME YEARS

TOTAL MONTHLY SNOWFALL IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP	OCT.	NOV.	DEC.	ALL MONTHS
55					.0	.0	.0	.0	.0	.0	.0	.0	
56	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	TRACE
57	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
58	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
59	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE	.0	TRACE
60	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
61	.2	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.2
62	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0
63	.0	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
64	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	*TRACE
65	.0	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
66	.0	.0	.0*	.0	.0	.0	.0	.0	.0	.0	.0	.0	* .0
67	* .0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	* .0
68	TRACE	.0	.0	.0	.0	.0	.0	.0	.0	.0			
MEAN	.02	TRACE	TRACE	.00	.00	.00	.00	.00	.00	.00	TRACE	TRACE	.02
S. D.	.055	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.057
TOTAL OBS.	374	368	403	389	434	420	434	434	420	434	390	403	4903

NOTE * (BASED ON < FULL MONTHS)

USAF ETAC FORM 0-8-0 (OLA)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF

(FROM DAILY OBSERVATIONS)

33308 — STATION

INCIRLIK AB TURKEY/ADANA — STATION NAME

[illegible] — YEARS

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS.	MONTHLY AMOUNTS (INCHES)		
PRECIP.	NONE	TRACE	.01	.02-.05	.06-.10	.11-.25	.26-.50	.51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4					
SNOW-DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN	100.0														374			
FEB	100.0														368			
MAR	100.0														403			
APR	100.0														389			
MAY	100.0														434			
JUN	100.0														420			
JUL	100.0														434			
AUG	100.0														434			
SEP	100.0														420			
OCT	100.0														434			
NOV	100.0														390			
DEC	100.0														403			
ANNUAL	100.0														4940			

1210 WS FORM AGE 0-15-5 (OL.I) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF/ETAC/OL A
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOW DEPTH

FROM DAILY OBSERVATIONS

33308 INCIRLIK AB TURKEY/ADANA 55-68
STATION STATION NAME YEARS

DAILY SNOW DEPTH IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC	ALL MONTHS
55					0	0	0	0	0	0	0	0	
56	0	0	0	0	0	0	0	0	0	0	0	0	0
57	0	0	0	0	0	0	0	0	0	0	0	0	0
58	0	0	0	0	0	0	0	0	0	0	0	0	0
59	0	0	0	0	0	0	0	0	0	0	0	0	0
60	0	0	0	0	0	0	0	0	0	0	0	0	0
61	0	0	0	0	0	0	0	0	0	0	0	0	0
62	0	0	0	0	0	0	0	0	0	0	0	0	0
63	0	0	0	0	0	0	0	0	0	0	0	0	0
64	0	0	0	0	0	0	0	0	0	0	0	0	0
65	0	0	0	0	0	0	0	0	0	0	0	0	0
66	0	0	0*	0	0	0	0	0	0	0	0	0	0
67	* 0	0	0	0	0	0	0	0	0	0	0	0	0
68	0	0	0	0	0	0	0	0	0	0			
MEAN	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	.0	TRACE
S.D.	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000	.000
TOTAL OBS.	274	248	403	289	434	420	434	434	420	434	390	403	4903

NOTE * (BASED ON < FULL MONTHS)

USAF ETAC FORM 0-8 0-8 (OL A)

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART C SURFACE WINDS

Presented in this part are various tabulations of surface winds as follows:

1. Extreme Values - Peak Gusts: Derived from daily observations and presented by individual year and month for the entire period of record available. Speeds are presented in knots, while directions are given in 16 compass points from the beginning of record through June 1968, and in tens of degrees starting in July 1968. The extreme is selected and printed from available peak gusts for each year-month, however an asterisk (*) is printed in the data block if less than 90% (3 or more missing observations) of the peak gusts are available for the month. An ALL MONTHS value is presented when every month of the year has valid observations. Means and standard deviations are also computed when four or more values are present for any column. A total raw count of valid observations is presented for each month and ALL MONTHS.

   NOTE: According to Federal Meteorological Handbook No. 1 specifications (formerly Circular N), "peak gust data are recorded only at stations with continuous instantaneous wind-speed recorders."

2. Bivariate percentage frequency tabulations: Derived from hourly observations, these tabulations are a percentage frequency of wind directions to 16 compass points and calm by wind speeds (knots) in increments of Beaufort classifications. Percentages are shown by both directions and speed, and in addition the mean wind speed is given for each direction.

   A separate category is provided on the form for variable winds, which are reported in some data sources. In these data where light and variable winds are reported with no directions but with speeds given, the speeds will be summarized in the appropriate groups opposite the column headed VRBL.

   a. Three tables are prepared for ALL WEATHER surface winds, all years combined, by: (1) Annual - all hours combined, (2) By month - all hours combined, and (3) By month - by standard 3-hour groups.

   b. A separate annual table is also presented for surface winds meeting INSTRUMENT CLASS conditions as follows: Ceiling 200 through 1400 feet inclusive with visibility equal to or greater than 1/2 mile, and/or visibility 1/2 through 2-1/2 miles inclusive with ceiling equal to or greater than 200 feet.

   NOTE: A percentage frequency of ".0" in these tables represents one or more occurrences amounting to less than ".05" percent.

DATA PROCESSING BRANCH
USAF/ETAC/DL A
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SURFACE WINDS

(FROM DAILY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 55-68 (YEARS)

DAILY PEAK GUSTS IN KNOTS

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
55													
56													
57													
58													
59													
60													
61				WSW*30	SSW 22	SSW 21	W 25	NSW 24	NNE 26	N 20	N 24	30	
62	NNW 37	W 33	SE 37	ENE 30	NE 24	NNW 32	SSW 26	NNE 25	NE 29	SSE 47	N 25	$ 31	SSE 47
63	NNE 31	WSW 35	$ 31	N *31	$ 23	$SW 24	$W 23	$W 20	NE 25	$SW 38	ENE 18	N 40	N 40
64	ENE 36	NE 30	$SE 40	W 30	NSW 31	$ 35	NSW 22	$SW 29	NW *28	N 46	$E 29	ENE 44	N 46
65	NE 34	WNW 38	$ 33	$ 35	WSW 39	$SW 30	$W 21	$W 23	NNE 25	NE 24	$W 32	NSW 40	WSW 40
66	S 40	NE 36	$SW 47	NE 33	NNE 35	$W 32	W 28	$SW 26	ENE 26	N 30	ENE 29	ENE 33	SSW 47
67	NNW*14	NNE 36	ESE 33	SW 40	$SW 33	W 26	NE 43	N 23	$ 24	ENE 26	$ 33	$W 48	SW 48
68	SW 40	WSW 43	$SW 34	NNE 29	W 40	NNW 35	5/ 36	34/ 30	20/ 38	25/ 24			
MEAN	33.1	35.9	36.4	32.3	30.9	29.4	28.0	25.0	27.6	33.3	27.1	38.0	44.7
S.D.	9.020	4.099	5.933	3.694	7.160	5.181	7.672	3.295	4.502	9.208	5.210	6.856	3.670
TOTAL OBS.	185	197	217	216	244	239	247	246	226	247	210	211	2685

NOTES * (BASED ON < FULL MONTHS)
$ (BASED ON < FULL MONTHS AND +100 KNOTS)

USAF ETAC FORM 0-80-0 (OL-A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33303 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 66-74 (YEARS) ALL (MONTH)

ALL A: TOT (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	1.9	.9	.4	.1	.0	.0					5.[illegible]	[illegible]
NNE	2.5	5.6	3.3	1.0	.2	.[illegible]	.[illegible]					12.7	[illegible]
NE	3.9	8.6	4.1	2.2	.4	.1	.[illegible]	.0				19.2	[illegible]
ENE	1.9	3.6	1.9	1.[illegible]	.2	.[illegible]	.[illegible]					[illegible]	[illegible]
E	1.6	1.8	.8	.[illegible]	.0	.[illegible]						4.6	[illegible]
ESE	1.1	.8	.4	.1	.0	.0	.[illegible]					2.1	[illegible]
SE	.9	.7	.2	.1	.0							1.[illegible]	[illegible]
SSE	1.1	1.0	.3	.1	.0	.0						2.5	[illegible]
S	1.7	2.0	1.3	.4	.1	.[illegible]						[illegible]	[illegible]
SSW	.9	1.8	2.1	1.[illegible]	.2	.[illegible]	.[illegible]	.0				[illegible]	[illegible]
SW	.8	1.8	2.1	1.7	.2	.[illegible]	.[illegible]					[illegible]	[illegible]
WSW	.7	1.[illegible]	1.[illegible]	.9	.1	.[illegible]						4.3	[illegible]
W	.7	.9	.4	.[illegible]	.0	.[illegible]	.[illegible]					2.4	[illegible]
WNW	.4	.4	.1	.1	.[illegible]							1.0	[illegible]
NW	.5	.3	.1	.1	.0	.0						1.[illegible]	[illegible]
NNW	.7	.7	.2	.1	.0	.0						1.[illegible]	[illegible]
VARBL	1.0	.6										1.[illegible]	[illegible]
CALM												12.7	
	22.1	33.9	19.4	10.[illegible]	1.5	.[illegible]	.[illegible]	.0				100.0	[illegible]

TOTAL NUMBER OF OBSERVATIONS 80376

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33361 — STATION
I CIGLIK AB TURKEY/ADANA — STATION NAME
57-63 — YEARS
ALL — MONTH
ALL WEATHER — CLASS
ALL — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	3.5	2.0	1.0	.2	.0						.9	6.1
NNE	2.8	8.2	6.4	2.1	.4	.1	.0					20.0	7.3
NE	3.0	9.8	7.7	4.3	.5	.1	.0	.0				25.5	7.1
ENE	1.0	4.2	4.7	3.2	.6	.1						14.5	8.1
E	1.4	2.4	2.0	1.1	.2							7.1	7.2
ESE	.6	.7	.1	.1								1.5	4.6
SE	.4	.3	.1	.1	.0							.9	7.1
SSE	.4	.3	.2	.1	.0							.9	4.0
S	.6	.5	.2	.2	.0	.0						1.5	5.3
SSW	.4	.3	.3	.1	.1	.1						1.3	6.2
SW	.3	.4	.2	.1	.0		.0					1.2	7.2
WSW	.4	.4	.0	.0	.0							.9	4.7
W	.5	.4	.1	.0	.0							1.1	5.5
WNW	.4	.3	.1	.1	.0							.9	4.7
NW	.5	.4	.1	.2	.1	.0						1.3	5.6
NNW	.8	1.0	.3	.3	.2	.0						2.6	6.3
VARBL	.6	.4										1.0	3.1
CALM												9.2	
	17.3	33.4	24.3	13.0	2.4	.4	.1	.0				100.0	6.4

TOTAL NUMBER OF OBSERVATIONS 7142

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

3

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33304 (STATION) I.CIKLIK AB TURKEY/ADANA (STATION NAME) 57-7[illegible] (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	2.5	1.9	1.1	.2	.1						7.7	[illegible]
NNE	1.9	7.7	[illegible].8	2.2	.7	.1						[illegible]9.7	7.[illegible]
NE	1.9	10.1	[illegible].5	[illegible].1	1.3	.2						[illegible]3.2	[illegible].[illegible]
ENE	1.1	3.6	3.5	3.[illegible]	.7	.2						12.2	[illegible].[illegible]
E	.9	2.2	1.2	.5	.0							4.9	[illegible].[illegible]
ESE	.7	.8	.3	.[illegible]								1.9	4.[illegible]
SE	.4	.6	.1	.1	.0							1.2	[illegible].[illegible]
SSE	.0	.6	.1	.[illegible]		.[illegible]						1.5	[illegible].1
S	.6	1.0	.[illegible]	.2	.1	.1						2.[illegible]	[illegible].2
SSW	.4	.6	.5	.3	.4							[illegible].2	7.[illegible]
SW	.4	.9	.4	.3	.2	.[illegible]	.[illegible]					[illegible].1	7.[illegible]
WSW	.3	.5	.3	.[illegible]	.0	.[illegible]						1.3	5.9
W	.5	.5	.2	.[illegible]	.0							1.3	4.6
WNW	.4	.2	.1	.1								.9	4.3
NW	.5	.3	.2	.1	.0							1.2	5.[illegible]
NNW	.9	.8	.2	.2	.1	.1						2.3	[illegible].[illegible]
VARBL	1.3	.7										2.[illegible]	3.[illegible]
CALM												7.[illegible]	
	14.7	34.[illegible]	25.[illegible]	14.[illegible]	3.4	.9	.[illegible]					100.0	7.[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]242

USAFETAC FORM AWS 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33301 STATION | I CIRLIK AB TURKEY/ADANA STATION NAME | 67-75 YEARS | JAN MONTH

ALL WEATHER CLASS | ALL HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	2.2	.9	.3	.1	.0						5.5	5.3
NNE	2.3	5.9	4.0	1.2	.2	.0						14.7	5.4
NE	3.2	9.4	5.5	3.2	.9	.1	.0					22.2	7.2
ENE	1.3	4.1	2.5	1.4	.3	.0	.0					10.2	7.5
E	1.6	2.4	1.2	.3	.0							5.5	5.4
ESE	1.2	1.2	.4	.1	.0							2.9	4.8
SE	.5	1.1	.3	.1								2.0	5.0
SSE	.6	.9	.5	.1	.0	.0						2.4	5.4
S	1.5	1.6	1.0	.4	.1	.0						5.0	5.3
SSW	.7	1.0	1.2	1.0	.3	.1		.0				4.3	8.4
SW	.5	1.4	1.0	1.0	.3	.2	.1					4.4	9.7
WSW	.6	1.3	.7	.3	.2	.1						3.1	8.9
W	.6	.7	.3	.1	.0							1.6	5.2
WNW	.4	.2	.2	.1								.9	5.1
NW	.5	.3	.2	.1	.0	.0						1.2	5.3
NNW	.3	.8	.4	.1	.1							2.3	5.3
VARBL	1.0	.8										1.7	3.1
CALM												10.0	
	19.7	36.1	20.5	10.7	2.4	.5	.1	.0				100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 6630

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 STATION | I CIRLIK AB TURKEY/ADANA STATION NAME | 7-7 YEARS | FE MONTH

ALL BY T... CLASS | ALL HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	1.5	.6	.2	.1							4.1	4.7
NNE	2.3	5.2	1.9	.7	.1	.1	.1					10.4	5.7
NE	4.3	7.4	3.1	1.3	.2	.1	.1					16.4	5.5
ENE	2.5	4.6	1.9	1.1	.1	.1						10.3	6.1
E	2.1	2.5	.9	.4	.1							6.0	5.2
ESE	1.3	1.0	.3	.1	.0							2.9	4.5
SE	.9	1.1	.3	.1								2.4	3.5
SSE	1.2	1.3	.2	.2	.1							3.2	4.3
S	1.9	2.4	1.9	.7	.1	.1						6.5	6.0
SSW	1.1	1.7	2.1	1.2	.4	.1						6.7	8.5
SW	.9	1.8	2.0	.8	.1	.1						5.7	7.6
WSW	1.0	1.5	1.2	.7	.1							4.4	6.7
W	1.0	1.0	.4	.2								2.6	4.3
WNW	.4	.5	.1	.0								1.0	4.2
NW	.5	.6	.1	.0								1.2	4.2
NNW	.5	.5	.2	.1	.0	.1						1.6	4.4
VARBL	1.3	.7										2.0	2.8
CALM												12.9	
	25.7	35.1	16.9	8.2	1.3	.3	.1					100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 9414

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-73 (YEARS) AY (MONTH)

ALL A/C TYPE (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	1.1	.3	.1								3.3	4.1
NNE	3.3	3.2	.6	.2	.0							7.6	4.1
NE	6.2	5.7	1.2	.3	.0	.0						13.6	4.1
ENE	3.1	3.2	.9	.3	.0							7.5	4.4
E	1.8	1.4	.6	.2								4.0	4.4
ESE	1.3	.8	.3	.0		.0						2.4	3.9
SE	1.1	.8	.3	.1								2.2	4.2
SSE	1.2	1.0	.6	.2								2.9	4.9
S	2.0	2.1	1.4	.9	.1							6.6	6.3
SSW	1.3	2.1	2.2	1.4	.4	.0						7.9	8.4
SW	1.4	2.4	2.9	1.8	.1	.0						8.7	7.9
WSW	1.1	2.0	2.1	.8	.1							5.1	7.1
W	1.0	1.2	.7	.2	.0		.0					3.0	5.5
WNW	.5	.4	.1	.1	.0							1.1	4.9
NW	.5	.3	.1	.0		.0						.9	4.4
NNW	.5	.5	.2	.1								1.2	4.5
VARBL	1.8	.6										2.4	2.8
CALM												18.6	
	29.9	28.6	14.7	7.1	.9	.1	.0					100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 6305

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
FTAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33338 (STATION) I. CIRLIK AB TURKEY/ADANA (STATION NAME) 67-71 (YEARS) ALL (MONTH)

ALL WX. THR (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.5	.3	.1	.0	.0						1.7	5.5
NNE	2.0	1.5	.2	.2	.1							3.5	4.7
NE	5.5	4.6	.5	.2	.1	.0						11.1	4.6
ENE	2.5	2.1	.4	.1	.0							5.2	4.1
E	1.3	1.2	.2									3.3	3.5
ESE	1.4	.7	.1	.0	.0							2.3	3.6
SE	1.0	.5	.2	.0								2.7	3.5
SSE	1.0	1.2	.3	.1								3.4	4.3
S	2.5	3.2	2.0	.8	.0	.0						9.5	5.3
SSW	1.3	3.0	3.9	2.7	.3	.0						11.2	6.3
SW	1.2	2.6	4.2	3.4	.3	.0						11.7	8.9
WSW	1.0	2.0	2.0	2.2	.1							7.9	8.5
W	.9	1.3	.7	.6	.1							3.6	6.7
WNW	.5	.4	.3	.1	.0							1.2	5.6
NW	.3	.2	.1	.0	.0	.0						.6	5.5
NNW	.4	.4	.2	.1	.0							1.1	5.0
VARBL	1.4	1.0										2.3	3.1
CALM												15.6	
	27.0	27.1	17.3	11.1	1.1	.1						100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 9306

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
STAL/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308	INCIRLIK AB TURKEY/ADANA	67-75	ALL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.4	.3	.1	.1							1.6	7.2
NNE	1.0	1.1	.4	.0	.2	.0						3.8	6.1
NE	3.3	2.7	.1	.2	.1	.0						6.4	3.9
ENE	1.3	1.4	.1									2.8	3.6
E	1.5	.6	.2									2.3	3.3
ESE	1.7	.6	.1	.0								2.4	3.1
SE	1.9	.8	.2	.0								2.9	3.3
SSE	2.4	1.9	.5	.1								4.9	4.0
S	3.1	4.7	2.7	1.2	.0	.0						11.7	5.9
SSW	1.9	4.4	5.3	4.5	.4	.0						17.0	8.5
SW	1.2	3.2	5.4	5.3	.4							15.4	9.2
WSW	.9	1.9	2.8	2.3	.1							7.9	8.5
W	.6	.8	.7	.0								2.7	6.9
WNW	.3	.2	.1	.0	.0							.6	5.3
NW	.0	.1	.0									.2	5.2
NNW	.2	.2	.1	.0								.5	5.3
VARBL	1.1	.5										1.6	2.8
CALM												15.2	
	23.5	29.5	19.3	19.1	1.3	.1						100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 6212

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I. CIRLIK AB TURKEY/ADANA (STATION NAME) 67-74 (YEARS) ...6 (MONTH)

ALL W...THER (CLASS) ...LL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.4	.4	.1	.0							1.4	5.3
NNE	1.5	2.0	.4	.2	.0							4.1	4.7
NE	4.6	5.4	.7	.4								11.0	4.9
ENE	1.9	2.0	.3	.1								4.4	4.0
E	1.8	1.2	.1	.0								3.1	3.5
ESE	1.7	.8	.1									2.5	3.1
SE	1.4	.8	.1	.0								2.4	3.4
SSE	2.0	1.8	.3	.1								4.3	4.0
S	3.2	4.7	2.5	1.5								12.4	6.1
SSW	1.5	4.0	5.0	3.6	.2		.1					14.9	7.2
SW	.8	3.1	4.5	4.6	.2	.0						13.3	7.2
WSW	.5	2.0	2.1	2.5	.1							7.2	8.3
W	.5	1.0	.8	.7	.1							3.0	7.9
WNW	.2	.3	.2	.0								.8	4.8
NW	.1	.1	.0	.0								.2	4.6
NNW	.2	.2	.1	.1	.0							.7	5.6
VARBL	1.2	.8										1.9	3.1
CALM												12.4	
	23.7	30.8	18.6	13.8	.6	.0	.0					100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 6500

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33304 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 66-72 (YEARS) | SEP (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	1.2	.7	.4	.0	.1		.0				3.6	6.3
NNE	2.3	4.6	1.9	.7	.2	.1						9.3	5.2
NE	3.8	10.5	3.0	1.0	.1							18.4	5.4
ENE	1.8	4.5	.9	.2	.0							7.4	4.7
E	1.0	2.0	.5	.1								4.2	4.6
ESE	1.0	1.1	.1	.1			.1					2.3	4.3
SE	1.1	.7	.1	.0								1.9	3.7
SSE	1.1	.9	.3	.1	.0							2.5	4.4
S	1.9	2.0	1.5	.8	.1							6.9	6.1
SSW	1.1	2.8	2.7	2.0	.2	.1						8.9	7.3
SW	1.1	2.9	3.2	2.0	.2	.1						9.9	7.2
WSW	.7	2.1	2.3	1.7	.1							6.8	8.1
W	.8	1.5	.8	.4	.0	.1						3.5	6.2
WNW	.2	.4	.1	.0								.7	4.9
NW	.3	.4	.1	.0								.8	4.7
NNW	.4	.6	.1	.1	.0	.0						1.2	5.2
VARBL	1.2	.8										2.0	3.1
CALM												9.6	
	21.5	39.4	18.1	10.4	.9	.1	.1	.0				100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 7001

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 66-74 (YEARS) CT (MONTH)

ALL W.THR (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.3	2.2	.4	.2	.0	.0						5.3	4.4
NNE	3.2	6.9	3.3	.9	.1							14.4	5.7
NE	3.7	12.0	3.6	1.7	.3	.0						21.4	5.9
ENE	2.0	4.7	1.3	.6	.0							8.6	5.4
E	1.5	2.1	.4	.1								4.5	4.7
ESE	.6	.9	.3	.1								2.1	4.5
SE	.4	.7	.2	.1								1.3	4.1
SSE	.6	1.0	.2	.1								1.9	4.3
S	1.2	1.5	.6	.1	.0							3.4	5.0
SSW	1.0	1.5	1.5	.7	.0							4.7	5.7
SW	.8	1.8	1.5	.7	.0							4.9	6.0
WSW	.9	1.6	1.2	.4	.0							4.1	6.4
W	1.0	1.3	.4	.2								2.9	4.5
WNW	.6	.6	.1	.1	.0							1.4	4.1
NW	.6	.4	.1	.0								1.1	3.7
NNW	1.0	.8	.1	.0	.0							1.9	4.0
VARBL	1.3	.6										1.8	2.7
CALM												13.5	
	23.9	40.6	16.1	5.9	.6	.0						100.0	4.7

TOTAL NUMBER OF OBSERVATIONS 7239

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33305 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 66-72 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 11 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.5	3.7	1.2	.4	.1	.0						7.9	3.1
NNE	3.2	8.5	6.7	1.2	.2	.1	.0					19.8	6.4
NE	3.8	11.9	6.0	2.1	.3	.1						24.4	6.4
ENE	1.8	4.5	2.0	1.6	.2	.1						10.8	7.3
E	1.0	2.0	.8	.4	.0	.0						5.3	5.4
ESE	.7	.7	.2	.0								1.5	4.6
SE	.5	.6	.1	.1								1.2	4.5
SSE	.7	.7	.1	.0								1.5	3.8
S	1.2	.7	.3	.2	.0							2.4	4.6
SSW	.5	.7	.5	.1								1.8	5.3
SW	.6	.6	.2	.1	.0							1.6	5.4
WSW	.6	.7	.1	.0	.0							1.5	4.5
W	.8	.9	.2	.0								2.0	4.2
WNW	.7	.5	.1	.0								1.3	3.7
NW	.8	.5	.2	.1	.0							1.5	4.5
NNW	1.5	1.1	.3	.2	.0	.0						3.1	4.7
VARBL	.0											.0	3.0
CALM												12.6	
	21.4	38.2	19.8	6.8	1.0	.2	.0					100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 7297

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) (MONTH)

ALL W.T. (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.5	3.1	1.6	.4	.1	.0	.0					8.1	5.1
NNE	3.0	9.9	5.6	1.7	.6	.1	.0					21.0	5.5
NE	3.2	11.6	8.6	5.1	.9	.1						29.4	7.6
ENE	1.8	4.3	3.8	3.2	.5	.1						13.6	7.1
E	1.4	2.0	1.1	.5	.0							5.0	5.0
ESE	.6	.6	.1	.0	.0							1.3	4.3
SE	.3	.4	.0	.0								.7	3.3
SSE	.3	.2	.2	.0	.0							.7	5.2
S	.5	.3	.0	.0	.1	.0						.9	6.0
SSW	.3	.3	.1	.0	.0	.0						.8	5.4
SW	.4	.3	.2	.0	.0							.9	4.9
WSW	.6	.2	.0		.0							.9	3.5
W	.6	.4	.1	.0								1.2	4.0
WNW	.4	.4	.1	.0	.0							.9	4.7
NW	.6	.5	.1	.1	.0							1.2	4.8
NNW	1.0	1.1	.3	.1	.0	.0						2.6	4.3
VARBL													
CALM												10.8	
	17.5	35.6	22.3	11.3	2.0	.4	.0					100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 6908

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (PERIOD) DEC (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
DEC	00-02	100.0	100.0	99.5	96.2	88.6	79.3	62.2	39.8	16.6	74.0	870
	03-05	100.0	100.0	99.7	96.5	88.4	75.4	57.8	36.2	15.2	72.7	861
	06-08	100.0	100.0	98.6	96.3	87.5	73.8	52.8	36.3	13.9	71.7	848
	09-11	100.0	99.0	91.3	77.2	58.2	40.6	28.1	14.1	6.2	57.1	837
	12-14	99.6	95.8	81.5	64.5	48.5	31.0	18.3	9.9	4.2	50.8	840
	15-17	99.9	97.7	90.3	76.6	60.2	43.4	28.9	14.1	4.6	57.1	852
	18-20	100.0	100.0	98.8	94.6	86.9	76.9	61.6	37.1	12.4	72.5	857
	21-23	100.0	100.0	99.4	95.6	87.4	78.3	65.1	45.1	19.5	74.7	871
TOTALS		99.9	99.1	94.9	87.2	75.7	62.3	46.9	29.1	11.6	66.3	6836

USAFETAC FORM AWS 64 0-87-5 (OL A)

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART F PRESSURE SUMMARY


Presented in this part are two tables giving the means, standard deviations, and total number of observations of station pressure and sea-level pressure by month and annual for the local hourly observations corresponding to the eight 3-hourly synoptic times GCT. The same computations are also provided at the bottom of the page for all hours combined. All years of data available are combined in both of these tables, although the overall period is limited by service as indicated below.

NOTES: Station pressure not reported for all services until late in 1945.
Station pressure reported only at 6-hourly times for Air Force stations from Jan 64 - Jul 65.
METAR stations do not report Sea-level pressure for the period Jan 68 - Dec 70.

1. Station pressure is presented in the table in inches of mercury.

2. Sea-level pressure is presented in millibars.

Provided below is a scale to convert station pressure values in inches of mercury or millibars to pressure-altitude in 1000's of feet. This scale is an enlarged model of the pressure-altitude scale in the Smithsonian Meteorological Tables.

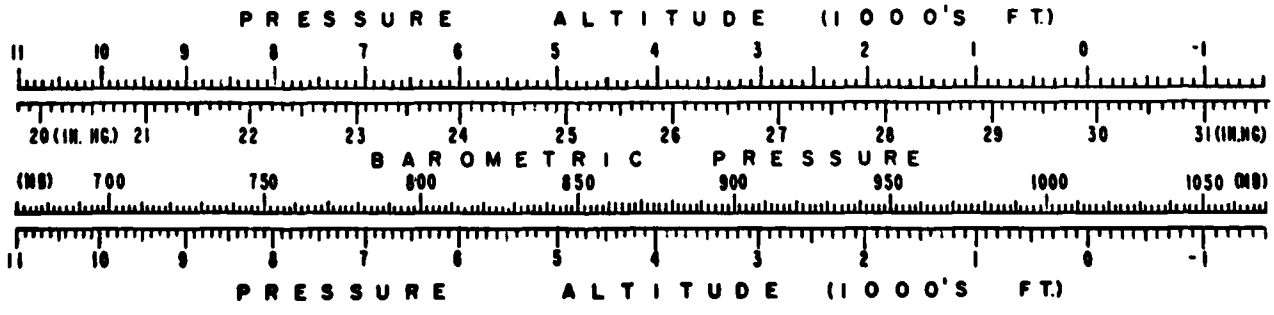

F

74-28967

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

STATION PRESSURE IN INCHES HG FROM HOURLY OBSERVATIONS

33308 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
06-76 — YEARS

HRS (L S T)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
02	MEAN	29.808	29.817	29.721	29.659	29.628	29.588	29.479	29.507	29.612	29.721	29.825	29.851	29.687
	S D	.195	.171	.182	.132	.085	.091	.060	.059	.074	.082	.135	.161	.175
	TOTAL OBS	137	123	132	128	119	134	122	146	175	137	148	147	1698
05	MEAN	29.787	29.799	29.707	29.653	29.626	29.586	29.475	29.504	29.608	29.719	29.814	29.837	29.680
	S D	.205	.169	.181	.132	.082	.091	.060	.060	.075	.082	.132	.187	.173
	TOTAL OBS	145	121	125	140	130	135	128	144	172	186	156	163	1745
08	MEAN	29.803	29.814	29.736	29.670	29.651	29.605	29.485	29.516	29.629	29.741	29.841	29.850	29.697
	S D	.185	.172	.179	.137	.084	.092	.063	.059	.078	.080	.133	.183	.172
	TOTAL OBS	133	121	131	133	122	142	114	147	167	187	147	146	1690
11	MEAN	29.814	29.824	29.737	29.669	29.641	29.588	29.473	29.508	29.623	29.735	29.838	29.877	29.697
	S D	.188	.176	.178	.123	.080	.092	.062	.062	.079	.082	.139	.189	.179
	TOTAL OBS	139	115	125	126	121	137	117	139	174	181	142	155	1671
14	MEAN	29.776	29.780	29.704	29.641	29.615	29.566	29.444	29.474	29.582	29.690	29.791	29.830	29.661
	S D	.188	.170	.176	.118	.078	.092	.063	.060	.078	.081	.123	.183	.172
	TOTAL OBS	139	121	130	132	129	130	121	134	169	189	140	151	1685
17	MEAN	29.783	29.781	29.695	29.631	29.601	29.551	29.436	29.472	29.576	29.692	29.799	29.835	29.657
	S D	.192	.168	.164	.116	.079	.085	.066	.057	.072	.082	.130	.178	.175
	TOTAL OBS	143	120	124	129	128	132	124	135	173	183	147	151	1689
20	MEAN	29.789	29.814	29.732	29.664	29.632	29.584	29.470	29.511	29.614	29.724	29.826	29.844	29.684
	S D	.183	.173	.176	.120	.087	.091	.061	.055	.075	.078	.133	.175	.171
	TOTAL OBS	140	123	125	137	126	135	126	146	170	187	144	141	1700
23	MEAN	29.807	29.823	29.739	29.668	29.644	29.599	29.492	29.526	29.625	29.731	29.834	29.859	29.697
	S D	.192	.177	.170	.120	.085	.089	.060	.057	.074	.079	.132	.184	.171
	TOTAL OBS	144	126	128	137	132	140	129	156	172	190	152	137	1763
ALL HOURS	MEAN	29.796	29.807	29.721	29.657	29.630	29.584	29.469	29.503	29.609	29.719	29.821	29.848	29.683
	S D	.191	.172	.176	.125	.084	.091	.064	.061	.078	.082	.133	.183	.174
	TOTAL OBS	1120	970	1020	1062	1007	1085	981	1147	1372	1490	1176	1211	13641

USAFETAC FORM JUL 64 0-89-5 (OL-A)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

SEA LEVEL PRESSURE IN MBS FROM HOURLY OBSERVATIONS

33308 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
66-76 — YEARS

HRS (L S T)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
02	MEAN	1018.1	1017.1	1014.4	1012.3	1011.6	1009.6	1006.6	1007.0	1010.8	1014.9	1018.1	1018.4	1013.3
	S D	6.026	5.857	5.625	4.717	3.424	3.047	2.202	2.207	2.658	3.087	4.089	5.643	5.879
	TOTAL OBS	267	239	274	259	264	257	257	263	292	291	318	275	3256
05	MEAN	1017.5	1016.8	1013.8	1012.1	1011.4	1009.5	1006.5	1006.8	1010.8	1014.7	1017.8	1017.8	1013.0
	S D	5.822	5.761	5.700	4.682	3.425	2.953	2.202	2.141	2.760	3.083	4.091	5.746	5.756
	TOTAL OBS	250	229	269	260	259	251	253	256	284	292	308	267	3178
08	MEAN	1018.6	1017.4	1014.7	1013.0	1012.2	1010.1	1006.8	1007.2	1011.5	1015.7	1018.7	1018.9	1013.8
	S D	6.027	6.128	5.780	4.764	3.297	2.911	2.238	2.156	2.652	3.238	4.266	5.799	5.974
	TOTAL OBS	267	243	269	257	266	257	253	263	292	296	317	274	3254
11	MEAN	1018.8	1017.6	1015.1	1013.1	1012.1	1009.5	1006.5	1006.9	1011.3	1015.5	1018.6	1018.8	1013.7
	S D	6.126	6.068	5.693	4.631	3.192	3.022	2.274	2.159	2.783	3.220	4.118	5.622	6.038
	TOTAL OBS	260	231	268	255	265	255	254	257	287	296	316	263	3207
14	MEAN	1017.2	1016.2	1013.7	1012.0	1011.0	1008.5	1005.4	1005.7	1009.8	1013.9	1017.2	1017.4	1012.4
	S D	5.876	5.696	5.575	4.389	3.060	2.836	2.204	2.256	2.676	3.116	3.903	5.551	5.847
	TOTAL OBS	267	239	272	257	266	259	259	263	287	295	314	271	3249
17	MEAN	1017.3	1016.0	1013.5	1011.6	1010.5	1008.1	1005.1	1005.5	1009.6	1013.8	1017.3	1017.9	1012.2
	S D	5.885	5.719	5.296	4.361	2.975	2.909	2.238	2.315	2.625	3.084	3.796	5.478	5.944
	TOTAL OBS	261	239	262	256	251	260	257	262	285	294	307	266	3194
20	MEAN	1018.1	1017.0	1014.4	1012.5	1011.5	1009.1	1006.2	1006.8	1010.9	1014.9	1018.2	1018.8	1013.3
	S D	6.069	5.819	5.483	4.533	3.208	2.984	2.197	2.299	2.662	3.095	3.939	5.627	5.954
	TOTAL OBS	267	246	271	257	266	260	252	259	287	295	315	283	3258
23	MEAN	1018.1	1017.2	1014.7	1012.8	1011.9	1009.7	1006.9	1007.2	1011.3	1015.3	1018.3	1018.9	1013.6
	S D	5.959	5.933	5.633	4.621	3.276	3.001	2.140	2.237	2.596	3.121	4.070	5.727	5.852
	TOTAL OBS	264	247	267	257	258	260	256	261	284	289	314	268	3219
ALL HOURS	MEAN	1018.0	1016.9	1014.3	1012.4	1011.5	1009.3	1006.2	1006.6	1010.8	1014.8	1018.0	1018.4	1013.2
	S. D.	5.991	5.886	5.617	4.608	3.279	3.018	2.295	2.305	2.752	3.192	4.065	5.668	5.932
	TOTAL OBS	2103	1913	2152	2058	2095	2059	2035	2084	2298	2348	2509	2161	25818

USAFETAC FORM JUL 64 0-89-5 (OLA)

DATA PROCESSING BRANCH
FTAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 67-71 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 0600-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.3	.4	.6	.4							2.1	11.1
NNE	.4	.4	.4	.5	.4							2.1	10.2
NE		.5	.2		.4	.1						1.2	10.3
ENE		.4	.1									.5	5.6
E	.1	.8	.1									1.0	5.4
ESE	.2	.4										.6	3.6
SE	.4	.5	.3	.1								1.3	5.4
SSE	.8	1.2	.4	.2								2.6	5.3
S	3.9	7.1	2.4	.1								14.5	5.1
SSW	3.2	11.6	7.5	.9								23.1	5.9
SW	3.1	8.7	0.8	1.0								13.6	5.3
WSW	2.0	5.7	4.4	.3								13.4	5.3
W	1.7	2.7	2.3	.1								6.9	5.0
WNW	.5	.1	.3	.1								1.0	5.5
NW	.2	.1										.4	2.3
NNW	.1	.1	.1									.5	5.0
VARBL	2.2	2.9										5.1	3.5
CALM												4.0	
	19.9	43.5	27.4	4.0	1.0	.1						100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 770

USAFETAC FORM AUG 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 — I.CIKLIK AB TURKEY/ADANA — 67-75 — JY

STATION — STATION NAME — YEARS — MONTH

ALL WEATH — 1200-1700

CLASS — HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N		1.0	.5	.4								1.9	7.1
NNE	.4	1.1	.6	.3	.1							2.5	7.2
NE	.1	.6	.3	.3	.1							2.0	8.5
ENE	.3	.6	.1	.1								1.4	4.7
E	.4	.4	.6	.1								1.5	6.8
ESE	.5	.1		.1								.9	4.3
SE	.1	.6	.4	.1								1.3	5.4
SSE		.8	.3									1.0	6.3
S	.3	1.4	3.9	2.0	.1							7.8	9.1
SSW	.1	3.2	6.9	6.9	.9	.1						18.1	10.4
SW	.6	5.1	12.1	9.2	.8							27.9	9.8
WSW	.6	4.2	10.4	4.1	.5							19.8	8.9
W	.1	1.4	2.2	1.4	.1		.1					5.3	9.6
WNW	.4	1.0	.4	.5								2.3	7.1
NW	.1	.4	.3	.1		.1						1.0	8.5
NNW	.4	.8	.4	.3								1.8	6.3
VARBL	.8	.5										1.3	2.9
CALM												2.3	
	5.4	23.3	39.9	25.8	2.7	.3	.1					100.0	8.8

TOTAL NUMBER OF OBSERVATIONS 786

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33365 (STATION) — I. CIRLIK AB TURKEY/ADANA (STATION NAME) — 67-71 (YEARS) — JUL (MONTH)

ALL WEATHER (CLASS) — 1300-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥ 56	%	MEAN WIND SPEED
N		.4	.3	.5	.4							1.5	11.9
NNE	.1	.1		.5								.8	1[illegible].3
NE		.1										.1	9.0
ENE													
E		.1	.1									.3	[illegible].1
ESE			.1	.1								.3	11.0
SE			.1	.1								.3	11.3
SSE			.0	.2								.3	9.9
S		.4	3.2	3.0		.1						7.4	11.3
SSW		.9	10.2	10.8	1.5	.1						29.5	12.0
SW		.5	11.6	24.0	1.8							37.9	12.1
WSW	.1	.5	5.0	10.5	.8							16.9	12.1
W		.3	.8	2.5								3.6	11.5
WNW	.1											.1	2.0
NW													
NNW	.1	.1	.1	.1								.5	7.8
VARBL	.1											.1	2.0
CALM													
	.6	3.4	32.1	59.1	4.4	.3						100.0	11.9

TOTAL NUMBER OF OBSERVATIONS 747

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 67-76 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N		.2	.1	.3	.1							.8	11.3
NNE		.1	.3	.9	.2							1.5	13.3
NE	.1			.2								.4	11.0
ENE		.3										.3	6.3
E	.1	.1										.3	4.5
ESE		.1										.1	4.3
SE			.1	.1								.3	11.3
SSE	.1	.3	1.0	.3								1.6	7.9
S	.5	2.0	4.8	4.4								11.7	9.4
SSW	.5	3.4	13.6	12.9	1.6							31.7	10.5
SW	.5	3.0	11.3	10.7	.8							26.4	10.3
WSW		2.8	6.6	5.2	.3							14.8	9.9
W	.6	1.6	1.9	2.0								6.2	8.4
WNW	.1	.1	.8	.3	.1							1.4	9.7
NW		.1	.3									.4	8.7
NNW		.4		.3								.6	7.8
VARBL	.4	.9										1.3	4.0
CALM												.5	
	3.0	15.5	40.7	37.1	3.2							100.0	9.8

TOTAL NUMBER OF OBSERVATIONS 723

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33305 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 67-75 (YEARS) | MAY (MONTH)

ALL WX THEN (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	1.5	.5	.1								3.9	4.3
NNE	1.0	2.6	.6	.1								4.4	5.0
NE	.9	1.6	.4	.4								3.0	5.5
ENE	.8	1.1	.9	.6								3.4	6.4
E	.5	.6	.5	.3								1.9	5.8
ESE	.5	.9	.1									1.5	4.6
SE	.8	.3										1.9	2.9
SSE	1.5	.8	.1									2.4	3.3
S	4.9	4.3	1.6	.5								11.3	4.6
SSW	4.0	5.8	4.0	1.1	.1							15.0	5.9
SW	5.0	8.4	4.9	1.3								19.5	5.6
WSW	3.9	4.6	2.8	.4								11.6	5.1
W	1.0	1.5	1.0									3.5	4.9
WNW	.1	.3		.1								.5	6.5
NW	.4	.4		.1								.9	4.9
NNW	.3	.8	.1	.1								1.3	5.4
VARBL	.9	.4										1.3	3.0
CALM												13.8	
	27.8	35.7	17.5	5.1	.1							100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 799

USAFETAC FORM AWS 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) DAY (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	1.3	.3									2.9	3.3
NNE	4.3	3.9	.8									9.0	4.3
NE	8.0	7.2	.4	.1								15.2	3.7
ENE	3.5	4.3	.3	.1	.1							8.3	4.3
E	4.0	1.8	.1	.1								6.1	3.1
ESE	3.5	.9	.1			.1						4.7	3.4
SE	2.5	.3		.1								2.9	2.9
SSE	3.4	2.1	.1									5.4	3.1
S	3.4	1.1										4.5	2.5
SSW	.8	.5	.1	.1								1.5	4.5
SW	.9	.1	.1									1.1	2.7
WSW	.3											.3	3.3
W	.6	.1	.1									.9	3.7
WNW	.3		.1									.4	5.0
NW	.3	.1										.4	2.7
NNW	.4	.3	.1									.8	3.8
VARBL	.9	.3										1.1	2.9
CALM												33.9	
	37.9	24.3	3.2	.6	.1	.1						100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 791

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33360 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 47-70 (YEARS) JUN (MONTH)

ALL ALTHR. (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.0	1.0	.1									1.1	4.0
NNE	6.0	4.4	.0	.4								12.0	3.7
NE	14.0	11.8	.4	.5	.3							26.9	3.6
ENE	6.4	4.4	.8	.1								11.8	3.7
E	4.9	1.4	.3									6.6	3.0
ESE	3.0	1.1			.1							4.3	3.4
SE	3.3	.9										4.2	2.7
SSE	1.4	.4										1.8	2.4
S	2.0	.4										2.4	2.3
SSW	.1	.1	.1									.4	4.7
SW													
WSW													
W	.1											.1	2.0
WNW					.1							.1	18.0
NW													
NNW													
VARBL	1.4	.6										2.0	2.6
CALM												25.5	
	46.0	26.7	2.3	1.0	.5							100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 791

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 57-7 (YEARS) JAN (MONTH)

ALL WX (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	.9	.3	.1								2.6	4.4
NNE	7.8	6.0	.6	.4								15.0	3.7
NE	20.5	15.8	.9	.1								37.3	3.3
ENE	8.1	6.8	.5									15.4	3.5
E	2.3	1.3										3.6	3.1
ESE	1.7	.9	.3									2.8	3.5
SE	1.3	.6										1.9	3.1
SSE	.1	.1	.1	.1								.5	6.5
S	.3	.1										.4	4.0
SSW		.3										.3	4.0
SW	.1	.1										.3	3.5
WSW													
W	.1											.1	1.0
WNW	.1	.1										.3	3.5
NW	.1											.1	2.0
NNW	.6	.1										.8	2.3
VARBL	.9	.3										1.2	2.6
CALM												17.6	
	45.4	33.5	2.8	.8								100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 780

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS) 0000-0700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	.6	.3	.4	.1	.1						2.5	6.4
NNE	3.6	1.9	1.4	.6	.3							7.4	5.2
NE	5.1	4.6	1.1	.5	.1							11.9	4.7
ENE	2.8	2.4	.4	.6	.3							6.4	5.1
E	1.9	1.4	.2									3.5	3.7
ESE	1.1	1.0	.1									2.3	3.4
SE	2.0	1.1	.4									3.5	3.7
SSE	2.1	1.5	.3	.1								4.0	3.8
S	3.1	2.3	.4	.1								5.9	3.8
SSW	2.5	2.6	.1	.3								5.5	3.9
SW	1.9	1.8	.3	.1								4.0	4.0
WSW	1.1	1.4	.5									3.0	4.3
W	1.4	1.1	.1									2.6	3.3
WNW	1.5	.4										1.9	2.7
NW	1.3	.3										1.5	2.5
NNW	.6	.5			.1							1.3	5.1
VARBL	3.6	.9										4.5	2.4
CALM												25.3	
	36.7	25.7	5.1	3.1	.9	.1						100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 798

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) JULY (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	.4	.5	.4	.1							2.6	5.2
NNE	.0	.7	.9	.0	.4							1.2	6.6
NE	.2	.6	1.4	.4	.1							2.7	7.7
ENE	.4	.5	.1	.2								1.4	5.4
E	1.4	1.5	.4									3.2	4.1
ESE	.4	.9	.2									1.5	4.8
SE	.9	1.2	.5									2.6	4.4
SSE	2.5	2.2	1.4									6.1	4.4
S	4.1	6.2	2.6	1.0	.1							14.0	5.5
SSW	2.6	5.3	2.3	.7	.2							11.2	6.0
SW	1.9	4.6	2.3	.9	.2							9.9	6.3
WSW	3.3	4.7	3.3									11.4	5.3
W	3.1	4.3	.7	.1								8.3	4.2
WNW	1.0	.6	.1									1.7	3.4
NW	.1	.6										.7	4.2
NNW	.5	.4	.2	.1								1.2	4.4
VARBL	3.2	3.8										7.0	3.5
CALM												11.0	
	27.3	38.9	17.1	4.4	1.2							100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 809

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

333[illegible] (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 57-7[illegible] (YEARS) [illegible] (MONTH)

ALL WEATHER (CLASS) 1300-1600 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.0	.5	.2	.1								1.5	5.4
NNE	.1	.1	.4	.1								.8	[illegible]
NE		.4	.3	.3	.1							1.1	2.5
ENE		.1	.0									.[illegible]	[illegible]
E	.3	1.0	.5									1.8	5.2
ESE		.4		.1								.5	6.5
SE	.1	.4	.1	.1								.8	[illegible]
SSE	.2	.9	1.3	.2								2.3	7.5
S	1.2	2.6	5.7	3.4	.1	.1						13.2	[illegible]
SSW	1.0	3.3	7.5	8.1	.6	.3						20.8	10.2
SW	.9	2.0	[illegible]	[illegible]	.9	.3						13.9	10.2
WSW	1.1	3.6	[illegible]	[illegible]	.2							15.5	9.1
W	1.0	3.8	2.8	1.0								[illegible]	[illegible]
WNW	.9	1.0	1.1	.[illegible]								3.6	7.0
NW	.1	.4	.3	.3	.3							1.3	[illegible]
NNW	.9	1.1	.8	.3								2.6	[illegible]
VARBL	.6	1.6										2.3	3.8
CALM												3.4	
	9.4	23.5	35.[illegible]	25.5	2.3	.6						1[illegible].[illegible]	8.5

TOTAL NUMBER OF OBSERVATIONS 795

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33300 STATION | I. CIRLIK AB TURKEY/ADANA STATION NAME | 67-72 YEARS | [illegible] MONTH

ALL WEATHER CLASS | 1200-1700 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.4	.3									.8	[illegible]
NNE	.1	.4	.1	.1	.1							.9	.[illegible]
NE	.1	.5	.1	.5	.1	.1						1.3	[illegible]
ENE		.3	.1									.4	[illegible]
E	.1	.4										.5	[illegible]
ESE	.1		.3	.1								.5	[illegible]
SE			.1									.1	[illegible]
SSE		.4	.3	.1								.8	[illegible]
S		.4	[illegible]	[illegible]								[illegible]	[illegible]
SSW	.1	[illegible]	[illegible]	[illegible]	[illegible]							[illegible]	[illegible]
SW		.9	[illegible]	[illegible]	[illegible]							[illegible]	[illegible]
WSW	.3	[illegible]	[illegible]	[illegible]	.5							[illegible]	[illegible]
W	.4	.9	[illegible]	[illegible]	.5							[illegible]	[illegible]
WNW	.1	.4	.6	.3								1.4	[illegible]
NW	.3		.3			.1						.6	[illegible]
NNW	.3	.5	.3	.2	.1							1.4	[illegible]
VARBL	.3											.3	[illegible]
CALM												1.3	
	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]						[illegible]	[illegible]

TOTAL NUMBER OF OBSERVATIONS 706

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33358 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-71 (YEARS) JAN (MONTH)

ALL A/C TOT (CLASS) 1 GMT-2 GMT (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1		.2	.1								.7	6.2
NNE	.4	.4	.1	.2	.2							1.4	5.4
NE	.4	.2	.1	.1	.1							1.2	5.4
ENE	.2	.2	.2									.6	5.3
E	.2	.4	.4									1.0	5.4
ESE	.1	.1	.1									.4	4.3
SE	.5	.6										1.2	3.3
SSE	1.4	1.1	.4	.1								3.0	4.3
S	4.0	9.0	5.7	.5								19.2	5.7
SSW	2.0	8.0	10.2	2.7	.1							23.1	7.3
SW	3.1	10.5	10.4	2.5								26.9	7.1
WSW	1.4	4.4	4.5	1.7	.1							12.1	7.4
W	.1		.7	.1	.1							1.1	10.0
WNW	.2	.2	.1									.5	4.2
NW	.1											.1	2.0
NNW	.2	.2	.1									.6	4.4
VARBL	.1	.2										.4	4.3
CALM												5.7	
	15.0	35.9	34.4	8.2	.7							100.0	6.3

TOTAL NUMBER OF OBSERVATIONS 302

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33365 STATION | I. CIRLIK AB TURKEY/ADANA STATION NAME | 67-75 YEARS | JAN MONTH

ALL WEATHER CLASS | 2100-0300 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.4	.1									.9	4.3
NNE	1.6	1.5	.1	.3	.1							3.6	4.6
NE	3.6	3.4	.1									7.2	3.4
ENE	2.5	2.0	.4									4.9	3.4
E	4.3	2.3										6.5	3.1
ESE	4.1	1.5	.1									6.2	2.9
SE	4.6	2.0	.3									7.0	3.1
SSE	5.0	3.3										8.3	3.2
S	8.2	4.3	1.4									13.8	3.4
SSW	2.1	1.5	.3									3.9	3.4
SW	1.6	.3	.1									2.0	2.7
WSW	.6	.3										.9	2.6
W	.4	.1										.5	2.5
WNW		.1										.1	6.0
NW	.3	.1										.4	3.0
NNW	.4		.1									.5	3.0
VARBL	.9	.1										1.0	2.5
CALM												32.2	
	41.3	23.1	3.0	.4	.1							100.0	2.2

TOTAL NUMBER OF OBSERVATIONS 795

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) 67-74 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0000-0700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	.5	.4	.1								3.1	4.7
NNE	4.5	2.3	.6	.3								7.7	3.9
NE	6.5	6.7	.1	.4								13.7	3.7
ENE	2.3	3.2	.4									5.9	3.7
E	4.0	1.3	.1									5.4	2.9
ESE	3.7	.9										4.6	2.4
SE	5.7	1.4										7.1	2.4
SSE	4.8	2.2	.1	.1								7.2	3.1
S	4.9	2.7	.4									8.0	3.4
SSW	1.2	.6										2.2	3.2
SW	.6	.3										.9	3.0
WSW	.3	.1										.4	2.7
W	.1	.1										.3	3.3
WNW	.1											.1	2.0
NW													
NNW		.3										.3	5.0
VARBL	.4	.2										.6	3.3
CALM												32.4	
	41.5	23.0	2.2	.9								100.0	2.2

TOTAL NUMBER OF OBSERVATIONS 775

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

333UP — STATION
INCIRLIK AB TURKEY/ADALA — STATION NAME
67-71 — YEARS
JUL — MONTH
ALL A/C TIME — CLASS
0300-0500 — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	1.2	.1	.4								2.9	4.9
NNE	5.0	3.7	.3	.1								9.1	3.4
NE	13.3	11.0	.3	.4	.1							25.1	3.5
ENE	5.0	4.8										10.4	3.3
E	3.9	.7	.1									4.7	2.7
ESE	3.5	1.1										4.5	2.7
SE	1.0	.5										2.1	2.0
SSE	1.7	1.2	.1									3.1	3.2
S	1.6	.3										1.9	2.4
SSW	.4	.3										.7	3.0
SW	.1											.1	3.0
WSW		.1										.1	4.0
W	.1											.1	2.0
WNW	.1	.3										.4	3.3
NW		.1										.1	4.0
NNW	.4	.1	.1									.7	3.8
VARBL	.3	.1										.4	2.0
CALM												33.0	
	39.4	25.5	1.1	.5	.1							100.0	2.2

TOTAL NUMBER OF OBSERVATIONS 752

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) | I CIRLIK AB TURKEY/ADANA (STATION NAME) | 67-75 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 0000-0300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.7	.3	.1	.3							2.2	6.5
NNE	1.7	1.2	.6	1.2	.5	.1						5.5	4.1
NE	5.1	2.1	.4	.3	.1	.1						8.1	4.1
ENE	1.2	1.0	.1									2.3	3.4
E	1.7	.8	.4									2.9	3.5
ESE	1.7	.4	.3									2.3	3.2
SE	1.7	.8	.1									2.6	3.2
SSE	2.3	.9	.1									3.4	3.3
S	3.1	3.6	1.2	.1								8.1	4.3
SSW	3.6	4.8	.8									9.4	4.1
SW	2.5	3.4	.5									6.4	4.1
WSW	2.6	3.9	.8									7.3	4.2
W	2.1	1.4										3.5	3.0
WNW	1.2	.7										1.8	2.9
NW	.1	.3	.1									.5	5.0
NNW	.7	.4	.3									1.3	4.4
VARBL	4.2	.1										4.3	1.8
CALM												28.1	
	36.5	26.4	6.1	1.7	.9	.3						100.0	3.0

TOTAL NUMBER OF OBSERVATIONS 708

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

333U8 (STATION) I ÇIRLIK AB TURKEY/ADANA (STATION NAME) -7-7- (YEARS) (MONTH)

ALL W[illegible] (CLASS) 2[illegible]-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	4.6	2.2	.7								9.5	5.9
NNE	2.6	14.2	7.2	2.5								26.4	6.4
NE	3.7	14.7	8.6	4.3	.2	.1	.1					31.8	6.3
ENE	2.6	5.7	4.2	2.1	.2							14.9	7.1
E	1.1	2.3	1.7	.3	.1							5.6	6.1
ESE	.2	.1										.2	4.0
SE	.3	.2										.6	2.2
SSE	.2	.2	.2									.7	5.0
S	.1	.2	.2	.4								1.0	9.3
SSW	.2		.4	.2								.9	7.4
SW	.1	.1	.1	.3								.7	9.7
WSW	.1	.2	.1	.1								.6	6.4
W			.1									.1	8.0
WNW		.1										.1	4.0
NW	.2	.3		.2								.9	7.3
NNW	.6	1.1	.4									2.1	4.7
VARBL	.4	.2										.7	3.2
CALM												3.5	
	16.4	44.4	25.8	11.4	.6	.1	.1					100.0	6.3

TOTAL NUMBER OF OBSERVATIONS 397

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIPLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 0300-0600 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	3.2	2.4	1.4	.1							9.7	6.8
NNE	2.3	10.7	9.9	2.8	.6	.1						26.7	7.3
NE	2.3	15.4	11.1	6.3	1.0	.1						36.5	7.9
ENE	.5	4.8	2.8	2.9	.1							11.2	8.1
E	.5	1.7	.5	.4								3.0	5.9
ESE	.5	.5										1.0	3.3
SE	.1	.3			.1							.5	7.3
SSE	.5	.1	.3									.9	4.6
S	.1	.3	.1									.5	4.8
SSW	.1	.4	.1	.1	.1							.9	8.4
SW	.1	.3		.4								.8	7.8
WSW	.1		.1									.3	5.3
W	.3	.1										.4	3.0
WNW	.1	.3										.4	4.0
NW	.5	.1										.6	2.2
NNW	.8	.4	.1	.1								1.4	4.7
VARBL	.6	.3										.9	3.0
CALM												4.4	
	11.9	38.6	27.8	14.6	2.2	.4						100.0	7.0

TOTAL NUMBER OF OBSERVATIONS 787

USAFETAC FORM AIL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
FTAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-72 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.9	3.1	2.9	.9	.1							8.5	5.3
NNE	2.3	10.3	8.5	3.0	.6							24.7	7.3
NE	2.4	13.7	11.5	5.4	1.2	.4						34.5	8.0
ENE	1.5	4.3	3.2	1.8	.1	.1						11.1	7.3
E	.9	1.5	.8	.8	.1							4.0	6.7
ESE	.4	.6										1.0	3.5
SE	.3	.1										.4	2.7
SSE	.1	.1	.1									.4	5.7
S	.3	.1										.4	3.0
SSW	.1											.1	2.0
SW					.4							.4	19.0
WSW		.1	.1	.1								.4	7.7
W	.3	.1	.1									.5	4.0
WNW	.4	.3										.6	3.2
NW	1.0	.5		.1								1.7	3.5
NNW	1.8	1.2	.1	.3								3.4	3.9
VARBL	.8	.8										1.5	3.0
CALM												6.3	
	14.8	36.9	26.9	12.2	2.8	.5						100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 776

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) İNCİRLİK AB TURKEY/ADANA (STATION NAME) 57-76 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 0000-0300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.6	3.6	2.0	.6	.2							10.4	5.5
NNE	3.2	10.8	10.4	2.2	.3	.1						27.1	7.1
NE	2.3	9.7	10.3	5.2	1.9	.4						30.4	8.5
ENE	1.1	3.0	4.7	2.2	.9							9.9	8.3
E	.6	1.9	.3									3.3	5.0
ESE	.4		.1									.5	3.5
SE		.1										.1	6.0
SSE	.3	.4		.1								.8	4.9
S	.3	.1	.3									.9	4.4
SSW	.1	.4										.5	4.0
SW	.4	.4	.1									.9	4.3
WSW		.1										.1	4.5
W	.6											.6	2.6
WNW	.3	.1										.4	2.7
NW	.6	.4										1.0	2.9
NNW	1.7	1.4	.1	.1								3.3	3.9
VARBL	1.0	.8										1.8	2.9
CALM												8.0	
	17.2	33.2	27.1	10.7	3.3	.6						100.0	6.5

TOTAL NUMBER OF OBSERVATIONS 787

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.7	2.1	1.0	.3	.1						6.2	7.1
NNE	1.7	3.9	5.9	4.3	.8	.1						16.8	9.7
NE	1.4	6.0	7.9	10.7	2.0	.1						28.2	10.2
ENE	.9	4.1	4.8	6.2	1.7	.6						18.5	10.8
E	2.1	2.9	2.8	1.4	.1							9.3	5.9
ESE	.8	1.3	.3									2.4	4.6
SE	.7	.7		.1								1.4	4.4
SSE	.3	.3										.5	3.5
S	.7	.5	.7		.1							2.0	6.0
SSW	.3	.3	.1	.4	.1							1.2	5.7
SW	.3		.3	.1	.1							.8	9.2
WSW	.3	.1		.1		.1						.7	3.9
W	.1		.1									.3	6.0
WNW	.9	.3										1.2	2.6
NW	.5	.1	.1									.8	3.2
NNW	.4	1.0	.4	.1								2.0	5.7
VARBL	2.6	.7										3.3	2.6
CALM												4.7	
	14.8	23.9	25.4	24.6	5.2	1.3						100.0	8.3

TOTAL NUMBER OF OBSERVATIONS 763

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33358 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 1200-1800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	1.2	.3	.9	.1	.1						4.1	7.9
NNE	.4	1.3	3.1	1.8	1.5	.1						8.2	11.2
NE	.9	4.0	6.1	6.3	.8	.4						18.4	9.7
ENE	.5	2.7	5.2	4.6	1.3	.0						15.2	10.5
E	1.7	4.5	2.9	1.5								10.6	6.7
ESE	.9	2.0	.9	.1								4.0	5.3
SE	.9	2.0	.1	.1								3.2	4.6
SSE	.3	.9	.4	.1								2.3	5.1
S	1.0	1.7	1.2	.4	.3							4.5	6.4
SSW	.3	1.2	.6	.5	.6							3.3	10.3
SW	.6	1.7	.6	.5	.5	.1	.1					4.2	9.0
WSW	.6	1.0	.3		.1							2.0	5.2
W	1.4	1.0	.5	.1	.1							3.2	4.9
WNW	.9	.4	.5	.1								1.9	5.1
NW	.5	.8	.5	.3	.3							2.3	7.1
NNW	1.0	.6	.1	.2	.1	.1						2.3	6.6
VARBL	2.3	1.7										4.0	3.1
CALM												6.4	
	15.6	28.6	29.1	17.7	5.9	1.7	.1					100.0	7.6

TOTAL NUMBER OF OBSERVATIONS 781

USAFETAC FORM AUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33360 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 67-75 (YEARS) | FEB (MONTH)

ALL WEATHER (CLASS) | 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.6	1.4	1.0	.4	.1						4.1	9.5
NNE	.6	2.2	2.6	1.7	1.0	.3						8.6	9.9
NE	1.0	2.3	6.3	4.5	1.2	.3						15.5	10.0
ENE	1.5	2.0	2.7	3.2	.6	.1						10.2	9.0
E	.3	3.3	1.7	.4								5.6	6.5
ESE	1.5	1.2	.9									3.6	4.4
SE	1.3	1.3	.6	.3								3.6	5.1
SSE	1.3	1.4	1.0	.1		.1						4.0	5.9
S	1.9	3.3	1.5	.6	.3	.3						8.1	6.7
SSW	.8	2.8	2.3	1.3	.3							7.4	7.3
SW	.9	3.2	1.0	1.2	.1	.1	.1					6.6	7.9
WSW	.6	1.8	1.7	.1	.1							4.3	6.5
W	.6	1.8	.5	.3								3.2	5.5
WNW	.4	.4	.5	.4								1.7	7.0
NW	.3	.3	.3	.3								1.0	7.5
NNW	.3	.4	.5	.1	.3	.3						1.8	11.4
VARBL	1.3	1.0										2.3	3.0
CALM												8.4	
	15.1	29.3	25.8	15.5	4.2	1.5	.1					100.0	7.2

TOTAL NUMBER OF OBSERVATIONS 782

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I-CIRLIK AB TURKEY/ADANA (STATION NAME) 67-74 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1200-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.8	2.9	2.4	1.5		.1						9.7	6.4
NNE	1.7	9.1	2.3	2.2	.1							15.3	5.3
NE	2.7	11.1	4.9	5.1	1.0	.1						24.9	7.7
ENE	1.3	2.9	3.2	1.9	.5							9.8	6.1
E	.4	.8	.3									1.4	5.0
ESE	.4			.1								.5	4.8
SE		.3	.1									.4	5.0
SSE	1.1	.8	.1									2.0	3.5
S	.5	1.4	.9	.1	.1							3.1	6.3
SSW	1.4	1.0	.6	.3	.1							3.4	5.6
SW	.6	1.7	.4	.1	.1							2.9	5.7
WSW	.9	.8	.1									1.8	3.6
W	.5	1.0										1.9	3.7
WNW	.4		.1									.5	3.5
NW	.5	.5	.4									1.4	4.5
NNW	1.1	.9	.3	.3		.3						3.1	7.3
VARBL	.6	.4										1.5	3.4
CALM												13.8	
	17.4	35.5	16.9	11.9	2.0	.5						100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 783

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I. CIRLIK AB TURKEY/ADANA (STATION NAME) 57-72 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) 2100-2400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	4.0	1.5	1.1		.3						8.7	6.7
NNE	2.6	13.4	5.4	2.0	.3	.1						23.8	5.8
NE	2.0	18.6	9.8	5.4	1.1							37.0	7.3
ENE	1.3	5.2	3.4	1.7	.1							11.7	7.1
E	.5	.9	.3	.1								1.8	5.1
ESE	.8	1.0	.1									1.9	5.1
SE		.1		.1								.3	5.3
SSE	.1	.6	.4									1.1	5.1
S	.1	.5	.5									1.1	5.0
SSW		.3	.4	.1	.3							1.0	11.5
SW		.1										.1	6.5
WSW		.1	.4									.5	7.3
W	.1											.1	4.0
WNW	.1			.1								.3	7.0
NW	.3				.1							.4	9.3
NNW	.5	.5	.1	.1	.3							1.5	7.3
VARBL	.9	.4										1.3	3.2
CALM												3.7	
	11.1	45.8	25.4	11.4	2.2	.4						100.0	6.7

TOTAL NUMBER OF OBSERVATIONS 783

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33302 (STATION) | ICIRLIK AB TURKEY/ADANA (STATION NAME) | 57-76 (YEARS) | [illegible] (MONTH)

ALL WEATHER (CLASS) | 0000-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	3.8	.7									7.1	4.4
NNE	3.0	9.2	6.9	1.5								[illegible].0	[illegible]
NE	6.3	18.5	6.6	2.7	.3							[illegible].4	[illegible]
ENE	2.0	6.7	2.7	1.3	.1							12.8	[illegible]
E	1.3	2.2	1.0	.7	.1							5.5	[illegible]
ESE	1.0	.5		.1								1.5	3.4
SE	.2	.4	.1									.7	[illegible]
SSE	.4	.6	.1	.1								1.2	[illegible]
S	.4	.6	.7	1.1								2.8	8.6
SSW			.2	.7								1.0	12.1
SW	.1		.4	.2								.7	9.9
WSW	.2				.2							.5	11.0
W		.4										.4	4.3
WNW	.2	.1										.4	3.0
NW	.4	.1	.1	.1								.7	[illegible]
NNW	1.2	.6	.5									2.3	4.1
VARBL	.6	.5										1.1	2.8
CALM												5.4	
	21.4	44.2	20.3	7.8	1.0							100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 922

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33305 STATION | I.CIRLIK AB TURKEY/ADANA STATION NAME | 7/-7[illegible] YEARS | [illegible] MONTH

[illegible] CLASS | [illegible] HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.3	2.8	1.3	.1	.2							7.8	[illegible]
NNE	3.5	10.4	5.6	.7								19.7	5.[illegible]
NE	4.3	15.7	7.9	3.8	.5		.1					32.3	7.[illegible]
ENE	1.7	4.3	2.4	1.0	.1							10.1	5.[illegible]
E	1.5	1.3	.1	.1								3.2	3.[illegible]
ESE	.7	.5	.2									1.5	4.[illegible]
SE	.2	.7		.4								1.3	9.[illegible]
SSE	.5	.5	.2									1.2	4.[illegible]
S	.5	.4	.4	.4								1.6	7.1
SSW	.2	.1	.9	.4	.1							1.2	10.[illegible]
SW		.1	.1	.1		.1						.5	12.[illegible]
WSW	.2	.1	.1			.1						.6	8.[illegible]
W	.2		.1									.4	9.7
WNW	.6	.4										1.0	2.4
NW	.7	.2	.1									1.1	3.3
NNW	1.2	1.1	.2									2.0	3.7
VARBL	.6	.4										1.0	3.0
CALM												3.0	
	20.5	39.0	22.6	7.6	1.0	.2	.1					100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 820

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33360 (STATION) | I.CIRLIK AB TURKEY/ADANA (STATION NAME) | 67-71 (YEARS) | Jan (MONTH)

ALL WEATHER (CLASS) | 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.1	2.7	.8	.4								7.6	4.1
NNE	4.4	8.0	6.3	2.5	.4	.1						21.7	5.7
NE	4.4	10.5	6.9	5.2	1.0	.1						28.1	7.4
ENE	.7	3.2	2.4	2.4	.8							9.3	8.0
E	1.7	1.6	.8									3.9	4.2
ESE	.4	.8	.2									1.9	3.3
SE	.4	.2	.1	.1								.8	5.4
SSE	.1	.6										.7	4.3
S	.4	.4	.6	.4								1.7	7.2
SSW	.5		.5	.1								1.1	6.3
SW	.1	.2	.1	.1								.6	7.2
WSW	.1	.2			.1							.5	8.0
W	.1	.1	.4									.6	6.4
WNW	.6	.4	.5	.1								1.6	5.3
NW	1.6	.5										2.1	2.6
NNW	2.3	.8	.4									3.5	3.3
VARBL	.6	.5										1.1	3.0
CALM												15.1	
	22.9	30.8	19.6	11.3	2.1	.2						100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 825

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.9	1.0	.4	.2							4.6	9.2
NNE	1.1	2.9	2.9	2.7	.2							9.8	8.3
NE	2.1	4.0	5.8	5.4	1.7	.1						19.1	9.3
ENE	.4	3.7	4.3	5.1	1.3	.4	.1					15.2	10.5
E	1.6	3.4	2.1	.6								7.9	5.7
ESE	2.1	1.8	.5									4.3	3.3
SE	.5	1.0	.4									1.8	4.5
SSE	.7	1.3	.1			.1						2.3	4.9
S	1.3	1.6	.6	.5	.2							4.5	6.4
SSW	.6	1.0	.4	.7	.4							3.0	9.1
SW	.5	.5	.1	.7	.6	.5	.1					3.0	13.3
WSW	.6	1.1	.6	.2	.2							3.0	6.6
W	1.3	.6	.1									2.1	3.4
WNW	.4	.1	.1									.6	4.0
NW	.4	.5	.4									1.2	5.1
NNW	.5	.5	.4	.1	.1							1.6	7.1
VARBL	2.3	1.0										3.3	2.5
CALM												12.8	
	17.8	26.8	19.9	16.4	5.1	1.0	.2					100.0	6.9

TOTAL NUMBER OF OBSERVATIONS 828

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33[illegible] (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) [illegible]7-7[illegible] (YEARS) [illegible]AR (MONTH)

ALL AI.TIME (CLASS)

[illegible]20[illegible]-14[illegible] (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	1.1	1.0	.7	.2	.1						4.0	[illegible]
NNE	.4	1.7	1.1	1.0	.4							4.3	[illegible]
NE	.5	1.8	2.2	2.4	.6	.1						7.6	10.2
ENE	1.0	2.3	3.2	2.6	.2							9.4	8.7
E	1.8	3.0	3.0	.5								8.3	[illegible]
ESE	.5	2.4	1.1	.2								4.2	[illegible]
SE	1.0	3.2	.8									5.0	[illegible]
SSE	1.3	1.4	1.3	.6								4.7	[illegible]
S	1.9	2.9	2.2	1.8								8.8	7.1
SSW	1.4	2.5	2.4	2.4	.5	.2						9.7	[illegible]
SW	.6	2.6	1.1	2.0	1.1	.2	.4					8.3	11.4
WSW	.6	2.2	.4	.6	.5							4.3	[illegible]
W	1.4	2.2	.7	.2								4.5	[illegible]
WNW	.5	.2	.4	.1								1.2	[illegible]
NW	.1	.5	.1	.1		.1						1.0	[illegible]
NNW	.4	.8	.6	.6	.1							2.5	[illegible]
VARBL	1.6	2.2										3.7	[illegible]
CALM												8.6	
	15.7	33.0	21.5	16.0	3.5	1.3	.4					100.0	7.0

TOTAL NUMBER OF OBSERVATIONS 833

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 1200-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	.7	1.2	.6								3.6	6.7
NNE	.5	1.3	1.2	.4								3.4	6.5
NE	.4	1.7	3.4	2.2	1.2							8.8	10.4
ENE	.2	2.3	1.8	1.6	.1							5.9	8.6
E	.8	2.2	1.7	.4								5.1	6.3
ESE	1.2	1.7	.6	.2	.1							3.9	5.4
SE	.4	2.1	1.2	.1								3.8	6.2
SSE	.8	1.7	1.7									4.2	9.0
S	2.9	4.4	2.4	1.1	.1							10.9	6.0
SSW	.8	2.2	4.7	2.5	1.2	.1		.1				11.7	10.0
SW	.8	3.5	5.0	3.8	.5	.6	.1					14.3	9.9
WSW	.5	2.2	4.2	1.7	.1							8.7	8.4
W	.5	.8	.8	.4								2.5	7.1
WNW	.2	.1	.7	.2								1.3	7.8
NW		.5	.7	.5								1.7	9.2
NNW	.1	.1	.8	.2	.2							1.6	10.4
VARBL	.7	1.3										2.1	3.8
CALM												6.4	
	12.1	28.7	32.3	15.9	3.6	.7	.1	.1				100.0	7.6

TOTAL NUMBER OF OBSERVATIONS 826

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33390 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 61-75 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	2.1	1.0	.1								4.4	5.1
NNE	1.7	6.8	1.9	.7	.4	.1						11.5	6.2
NE	2.4	8.1	3.9	2.0	.4	.1						16.9	7.0
ENE	1.3	2.4	1.0	.4								5.0	5.1
E	1.2	2.1	.4	.1								3.8	4.8
ESE	1.8	.8										2.6	3.0
SE	1.0	.6										1.5	3.3
SSE	2.0	.2	.5	.2	.1							3.1	4.7
S	4.6	1.9	.7	.7	.1	.1						8.0	4.5
SSW	2.0	2.1	1.2	.5								5.8	5.4
SW	1.8	3.9	.8	.2	.2							7.2	5.5
WSW	2.3	4.3	.6	.1								7.2	4.5
W	.8	1.1	.2	.1	.1							2.4	5.4
WNW	.4		.2									.6	4.0
NW	.3		.1		.1							1.0	5.3
NNW	1.2	1.0	.1		.2							2.5	4.9
VARBL	1.0	.1										1.1	2.3
CALM												15.4	
	27.2	37.5	12.6	5.2	1.7	.6						100.0	4.6

TOTAL NUMBER OF OBSERVATIONS 842

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	2.3	.6	.5								5.0	5.2
NNE	3.2	15.1	3.2	.8	.2							22.7	5.6
NE	5.3	15.2	7.0	2.3	.2							30.0	5.3
ENE	2.9	7.9	2.0	.4	.1							13.3	5.3
E	2.2	3.0	.7	.2								6.1	4.2
ESE	1.6	1.3	.5	.1								3.5	4.6
SE	.7	.5										1.2	3.3
SSE	.5	1.0	.4	.1								1.9	5.3
S	.1	.6	.5	.4	.1							1.7	7.9
SSW	.1	.2	.1	.4	.1							1.0	10.0
SW		.1	.2	.1	.2							.7	12.2
WSW	.1											.1	3.0
W		.2										.2	5.5
WNW	.4											.4	2.3
NW	.5	.2										.7	3.2
NNW	.5	1.1										1.6	3.8
VARBL	.6	.1										.7	2.5
CALM												9.2	
	20.3	48.9	15.2	5.3	1.1							100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 834

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	2.0	.1	.1								4.7	3.9
NNE	3.2	9.4	2.3	.2	.1	.1						16.1	5.2
NE	7.9	16.4	4.0	1.1	.3	.1						29.8	5.0
ENE	4.5	8.4	1.9	.4	.1							15.3	4.4
E	2.9	2.6	1.4	.2	.1							7.3	4.3
ESE	2.1	1.3	.1	.1								3.6	3.6
SE	.6	.9	.1	.1								1.8	4.8
SSE	1.4	.4	.2									2.0	3.4
S	.8		.1	.1								1.0	4.0
SSW	.1	.5	.4	.3								1.3	7.2
SW	.1		.2	.2	.1							.5	11.0
WSW		.2										.2	4.5
W	.2	.5	.1									1.1	3.8
WNW	.4	.2										.6	3.4
NW	.3	.1	.1									.5	4.8
NNW	.5	.5										1.0	3.1
VARBL	.8	.4										1.1	2.8
CALM												11.7	
	29.1	43.9	11.2	3.0	.8	.4						100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 795

USAFETAC FORM AR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) | I.CIRLIK AB TURKEY/ADANA (STATION NAME) | 57-75 (YEARS) | APR (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.6	2.8	.2									6.9	3.3
NNE	5.3	9.2	3.3	.5		.1	.1					18.6	5.4
NE	8.3	15.0	3.6	1.1	.1		.1					28.2	4.9
ENE	4.2	8.0	1.4	1.4		.1						15.1	5.3
E	1.7	2.2	.4	.1								4.4	4.2
ESE	1.4	.6										2.0	2.9
SE	.2	.5	.1	.2								1.1	5.8
SSE	.6	.6	.5									1.7	4.9
S	.6	.5	.2	.1								1.5	5.0
SSW	.4	.1	.2									.7	4.3
SW	.1	.1		.1								.4	6.0
WSW	.1	.2										.4	3.7
W	.5			.2								.7	5.2
WNW	.5	.4		.1								1.0	4.5
NW	.7	.6										1.4	3.0
NNW	1.1	1.2										2.3	3.5
VARBL	.6	.7										1.4	3.3
CALM												12.3	
	30.2	43.0	10.0	3.9	.1	.2	.2					100.0	4.2

TOTAL NUMBER OF OBSERVATIONS 812

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33304 (STATION) — I ÇIRLIK AB TURKEY/ADANA (STATION NAME) — 57-7. (YEARS) — APR (MONTH)

ALL WEATHER (CLASS) — 0600-0900 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.7	2.7	.7	.2	.2							7.7	4.5
NNE	3.7	7.2	3.2	.9	.1	.1						15.1	5.6
NE	5.9	9.2	5.5	1.9	.1	.1						22.9	5.1
ENE	3.1	4.2	2.0	1.1	.1							11.0	6.0
E	2.2	2.4	.6	.4								5.6	4.7
ESE	.7	1.2	.1	.1								2.2	4.3
SE	.2	1.0	.2									1.5	5.0
SSE	1.0	.5	.1									1.6	3.2
S	.9	.5	.6	.1								1.9	3.5
SSW	.4	.1		.4	.1							1.0	9.1
SW		.2		.4	.1							.7	12.2
WSW	.5	.1										.6	3.0
W	1.1	.5	.1									1.7	3.1
WNW	.6	.5	.1									1.2	3.6
NW	1.0	.5	.1									1.6	3.5
NNW	1.4	.6	.2			.1						2.4	4.3
VARBL	2.0	.2										2.2	2.1
CALM												18.3	
	28.3	31.9	16.8	5.2	.9	.3						100.0	4.6

TOTAL NUMBER OF OBSERVATIONS 802

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-7[illegible] (YEARS) [illegible] (MONTH)

ALL WEATHER (CLASS) 0700-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	1.2	.3	.4								2.7	5.3
NNE	.9	1.5	1.7	1.0	.1							5.2	8.1
NE	1.6	2.0	3.7	3.3	.4	.1						11.1	9.3
ENE	1.0	3.2	3.5	2.7	.5							10.9	8.6
E	2.5	2.8	2.0	.7								8.0	5.7
ESE	1.7	1.4		.4								3.5	4.4
SE	1.4	1.9	1.0									4.3	5.0
SSE	1.7	1.4	.7	.1								4.0	4.8
S	1.9	2.1	.5	.7	.2							5.4	6.2
SSW	2.0	2.7	1.0	.4	.5	.2						6.8	6.3
SW	1.4	1.4	.1	.1	.1	.1						3.2	5.4
WSW	1.6	1.2		.2								3.1	4.0
W	2.0	1.7	.1	.1								4.0	3.9
WNW	.9	.6	.2									1.7	4.2
NW	.5	.9	.1									1.5	3.9
NNW	1.2	.2	.1									1.6	3.0
VARBL	4.7	1.0										5.7	2.3
CALM												16.7	
	27.5	27.2	15.3	10.5	1.9	.5						100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 808

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

333V8 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
57-72 — YEARS
APR — MONTH
ALL A/C TYPES — CLASS
1200-1500 — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.9	1.1	.5								2.9	7.4
NNE	.4	.6	1.0	.2								2.2	7.1
NE	.5	1.0	2.4	.5	.1							4.3	7.3
ENE	1.3	1.6	2.4	1.1		.1						6.7	7.1
E	1.1	2.8	1.4	.9	.4							6.4	7.2
ESE	.1	1.0	1.0	.1	.1							2.4	7.3
SE	1.1	1.5	.8	.1								3.5	5.1
SSE	.9	1.9	.6	.6	.1							4.2	6.3
S	3.0	4.9	4.2	2.0	.3	.1						15.3	7.4
SSW	1.1	2.5	4.4	3.1	1.1							13.2	7.1
SW	1.0	3.3	4.2	1.5	.1	.1						10.4	8.0
WSW	1.5	2.3	2.2	1.0	.1							7.1	7.0
W	1.5	1.9	.9	.5								4.8	5.5
WNW	.8	.5	.1	.1								1.5	4.3
NW		.9	.1	.1								1.1	6.1
NNW	.5	.5	.4	.1	.1							1.6	6.2
VARBL	1.5	1.9										3.4	3.5
CALM												8.2	
	16.8	30.1	27.0	14.8	2.5	.5						100.0	6.8

TOTAL NUMBER OF OBSERVATIONS 790

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
FTAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33338 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 57-75 (YEARS) | APR (MONTH)

ALL WEATHER (CLASS) | 1200-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.6	.7	.1								1.8	5.5
NNE	.3	1.2	1.0	1.0	.2							4.0	7.4
NE	1.2	.9	1.0	.7	.6							4.5	7.2
ENE	.6	1.2	.6	.9								3.4	7.4
E	.9	1.6	.9	.3								3.4	6.3
ESE		.5	.7		.1							1.4	7.5
SE	.5	1.0	.2									1.7	4.5
SSE	.6	2.0	.5	.4								3.5	5.6
S	1.9	5.2	3.6	1.1								11.9	6.3
SSW	.9	2.6	7.3	6.0	.7	.2						18.0	11.2
SW	.7	2.6	7.2	3.9	.5							17.0	9.3
WSW	1.0	3.9	5.7	4.1	.4							15.1	8.7
W	.9	1.1	1.0	.0								4.2	5.3
WNW	.1	.9										1.2	4.3
NW	.5	1.1	.2	.1								2.0	5.4
NNW	.5	.5	.2	.4								1.6	6.4
VARBL	.5	.5										1.0	3.5
CALM												4.5	
	11.5	27.6	33.7	19.9	2.6	.2						100.0	7.7

TOTAL NUMBER OF OBSERVATIONS 801

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

3

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33360 STATION | I CIRLIK AB TURKEY/ADANA STATION NAME | 67-72 YEARS | JAN MONTH

ALL W/ THR CLASS | 1 CW=2400 HOURS (L.S.T.)


CONDITION


SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.1	.4	.1								2.7	4.3
NNE	1.0	4.6	1.6		.1							7.3	5.1
NE	2.4	3.6	1.1	.0	.2							7.5	4.3
ENE	1.4	1.9	1.0	.0	.2							4.1	6.0
E	1.2	1.2	.9	.4								3.7	5.7
ESE	1.4	.7	.2	.1								2.5	4.3
SE	.7	1.2	.1									2.1	3.3
SSE	1.9	2.2	.4	.1								4.5	4.5
S	4.2	4.5	1.2	.0	.1							10.7	5.7
SSW	3.2	4.1	2.7	1.1	.2							11.4	6.1
SW	3.4	6.3	2.1	.4								12.2	5.1
WSW	3.0	3.0	1.4	.2								7.7	4.7
W	1.2	1.9	.2									3.4	4.1
WNW	.2	.4	.1									.7	4.3
NW	1.4	.4	.1									1.9	3.3
NNW	.9	.1	.2	.1								1.4	3.3
VARBL	.2	.2										.5	3.0
CALM												13.9	
	28.4	38.1	13.7	4.5	1.0							100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 893

AD-A082 415 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
INCIRLIK AB, ADANA, TURKEY. REVISED UNIFORM SUMMARY OF SURFACE --ETC(U)
MAR 77

UNCLASSIFIED USAFETAC/DS-80/023 NL

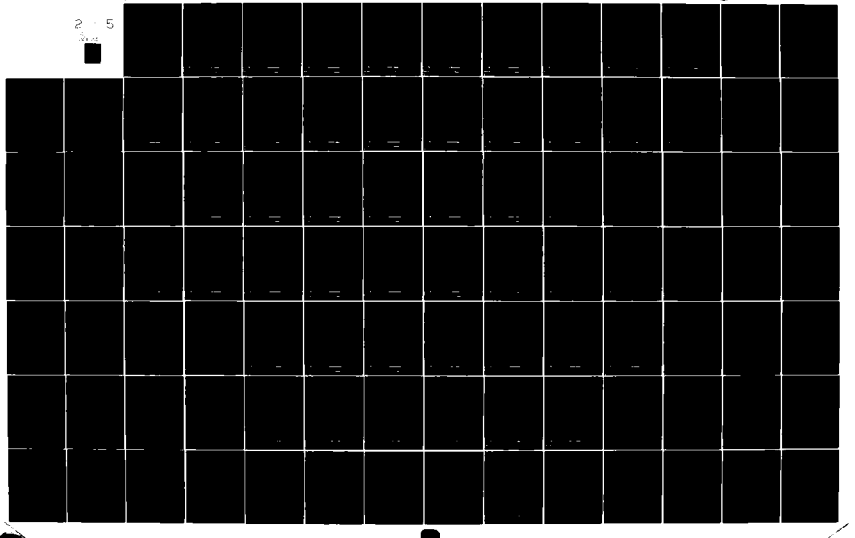

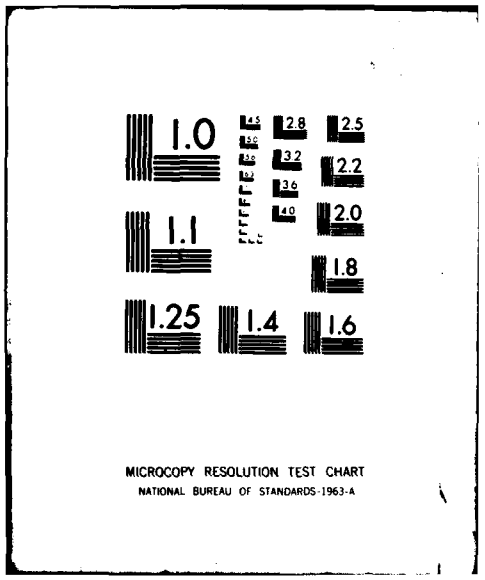
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33303 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	.9	.6	.1								3.1	4.6
NNE	4.1	7.4	.9	.9	.1							13.4	5.3
NE	6.7	14.9	3.7	1.1	.1							22.6	5.0
ENE	3.9	7.9	1.6	.7	.1							14.2	5.1
E	4.5	4.1	.7	.1								9.5	4.0
ESE	3.2	1.6		.2								5.1	3.5
SE	2.4	.9	.1									3.4	3.0
SSE	1.4	1.7	.6									4.2	4.3
S	2.5	1.4	.5	.2								4.6	4.2
SSW	.5	.5	.2		.1	.1						1.5	7.3
SW	.5	.1	.1			.1						.9	0.7
WSW	.4	.5										.9	3.1
W	.2	.4										.6	3.4
WNW		.1										.1	4.0
NW													
NNW	.7		.2									1.0	3.8
VARBL	.2	.4										.6	3.2
CALM												14.2	
	33.3	38.7	9.5	3.5	.5	.2						100.0	4.0

TOTAL NUMBER OF OBSERVATIONS 801

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33303 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-70 (YEARS) ANY (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.0	1.1	.1									4.3	2.7
NNE	5.4	6.6	.8									12.8	3.8
NE	16.3	13.2	.9	.1								30.5	3.5
ENE	7.8	7.3	.8									15.8	3.6
E	3.3	2.3	.4	.1								6.0	3.7
ESE	2.0	.4	.3									2.6	3.2
SE	1.3	.8										2.0	3.3
SSE	.4	.3	.1	.1								.9	4.9
S	.6	.5	.1									1.3	3.9
SSW	.1											.1	2.0
SW	.3		.1									.4	4.3
WSW	.1	.1										.3	3.5
W	.1		.1									.3	6.0
WNW		.1										.1	6.0
NW	.6											.6	2.4
NNW	.4	.6										1.0	3.6
VARBL	1.3	.4										1.6	2.7
CALM												19.5	
	42.9	33.8	1.6	.4								100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 798

USAFETAC FORM AUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) — INCIRLIK AB TURKEY/ADANA (STATION NAME) — 67-76 (YEARS) — MAY (MONTH)

ALL WEATHER (CLASS) — 0300-0300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.3	.9	.1									3.3	2.3
NNE	9.9	6.9	1.0									17.8	3.5
NE	17.0	15.1	1.7									14.4	3.6
ENE	7.8	5.9	.8	.1								14.5	3.0
E	2.0	1.0	.5									3.6	3.7
ESE	.9	1.0										1.9	3.7
SE	.4	.3	.1									.9	4.5
SSE	.4	.4	.3	.1								1.1	5.8
S	.3	.3		.1	.1							.8	8.2
SSW	.1											.1	2.0
SW	.1					.1						.3	14.0
WSW	.3	.1										.4	3.3
W	.5											.5	2.3
WNW	.3	.1			.1							.5	7.0
NW	.3		.1									.4	4.7
NNW	1.0	.4	.1									1.5	3.4
VARBL	1.5	.4										1.9	2.5
CALM												16.3	
	48.5	32.3	4.7	.6	.3	.1						100.0	3.0

TOTAL NUMBER OF OBSERVATIONS 786

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) 0000-0300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.1	1.4	.4									4.9	3.4
NNE	3.3	3.3	1.0	.1								8.3	4.5
NE	6.5	5.4	2.5	.6								15.1	4.6
ENE	3.5	3.0	1.5	.3								8.3	4.6
E	2.4	1.6	1.1	.1								5.3	4.4
ESE	1.1	1.4	.1									2.6	3.7
SE	1.4	1.5	.3									3.1	3.9
SSE	1.8	1.3	.4									3.4	4.1
S	1.6	.9	.9	.4	.1							3.5	5.6
SSW	.8	.4	.3	.3	.1							1.8	6.2
SW	.9	.3										1.1	2.9
WSW	.6	.3										.9	3.1
W	1.0	.3	.3									1.5	3.5
WNW	.6	.4										1.0	2.9
NW	.8											.8	1.8
NNW	.9	.5	.1									1.5	3.5
VARBL	2.5	.5										3.0	2.4
CALM												33.9	
	32.8	22.2	9.0	1.8	.3							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 796

USAFETAC FORM AUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 67-73 (YEARS) | JAY (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.9	1.2	.5	.1								3.4	4.5
NNE	1.7	.6	.9	.2								3.7	5.8
NE	.7	1.9	2.1	.8		.1						5.5	7.4
ENE	1.2	1.9	1.6	.6	.1							5.5	6.5
E	1.4	1.6	.7									3.7	4.5
ESE	1.4	.7	1.0									3.1	4.6
SE	1.9	1.4	.4									3.2	4.0
SSE	2.1	1.4	1.7									5.2	4.7
S	3.6	3.7	1.2	1.2	.4							10.2	5.9
SSW	2.9	2.6	1.4	1.5	.6							9.0	7.0
SW	2.2	2.4	.5	.6								5.7	5.3
WSW	2.0	2.0	.4	.2								4.6	4.2
W	2.4	2.9	.4									5.6	3.8
WNW	1.4	.5	.2	.1								2.2	3.9
NW	.9	.9										1.7	3.4
NNW	.7	.1	.1									1.0	3.3
VARBL	3.7	.6										4.4	2.5
CALM												22.2	
	31.6	26.4	13.2	5.6	1.1	.1						100.0	4.1

TOTAL NUMBER OF OBSERVATIONS 803

USAFETAC FORM AIR 64 0-8-5 (DL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥ 56	%	MEAN WIND SPEED
N	.6	.6	.2	.1								1.6	5.4
NNE	.9	.6	.5	.4								2.4	5.7
NE	.2	.9	.6	.6								2.4	8.1
ENE		1.4	1.1	.2								2.7	7.0
E	.6	1.6	1.1	.5								3.8	6.8
ESE	.6	.6	.5									1.7	4.8
SE	.6	1.5	1.0	.4								3.5	5.3
SSE	.2	1.0	1.5	1.1								3.9	8.6
S	1.4	4.5	4.1	3.0	.4							13.3	7.9
SSW	1.5	4.0	5.0	5.1	1.5	.2						17.2	9.9
SW	.9	3.1	5.5	3.2	.4	.1						13.3	9.1
WSW	.9	4.6	3.3	2.0	.2							11.3	7.6
W	1.5	3.2	1.5	.1								6.7	4.8
WNW	1.1	.7	.2									2.1	3.8
NW	.7	.2	.2	.1								1.4	4.8
NNW	.2	.2	.2	.1								.9	6.7
VARBL	2.7	1.9										4.6	3.3
CALM												7.3	
	15.1	30.9	26.7	17.1	2.5	.4						100.0	7.0

TOTAL NUMBER OF OBSERVATIONS 806

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33368 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 0300-0900 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.0	4.5	2.2	.7								11.4	5.3
NNE	3.5	9.9	9.0	1.9	.3	.2						24.8	6.3
NE	2.8	11.9	9.7	3.5	.8			.1				28.7	7.4
ENE	1.1	3.4	4.6	2.1	.1							11.4	7.9
E	1.2	1.2	1.2	.7	.1							4.5	7.0
ESE	.3											.3	2.0
SE	.1	.1	.1									.3	5.0
SSE			.1									.1	5.0
S		.1	.1	.2								.4	9.3
SSW		.2	.1									.3	6.0
SW			.1		.1							.2	13.5
WSW	.2	.1										.3	3.7
W	.1	.1		.1								.3	6.7
WNW	.2	.1	.1									.6	3.0
NW	.8	.4	.1	.1								1.5	4.3
NNW	1.2	1.2	.2	.6	.1							3.4	6.0
VARBL	.7	.6										1.2	3.1
CALM												9.9	
	16.5	33.9	27.9	9.9	1.6	.2		.1				100.0	6.1

TOTAL NUMBER OF OBSERVATIONS 891

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-71 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0000-0700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.1	5.0	1.3	.8	.2							11.5	4.3
NNE	3.6	10.1	8.3	1.6	.7	.3	.1					24.4	7.1
NE	3.2	9.8	8.3	4.1	.4		.1					25.9	7.4
ENE	.6	2.3	3.6	2.0								8.5	7.2
E	.3	1.3	1.6	1.2								4.7	6.7
ESE		.2										.2	4.5
SE	.1	.1	.2									.4	3.3
SSE	.2											.2	2.5
S	.4											.4	2.5
SSW	.1	.1	.3	.1	.1							.8	5.1
SW			.2									.2	5.5
WSW	.3											.3	1.7
W	.4											.4	1.8
WNW	.3	.3										.7	3.3
NW	1.3	1.3	.1	.1								2.9	3.5
NNW	2.0	1.7	.3	.6								4.6	4.8
VARBL	.6	.3										.9	3.0
CALM												12.3	
	17.8	32.7	26.5	10.7	1.5	.3	.2					100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 695

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33BL2 (STATION) — INCIRLIK AB TURKEY/ADANA (STATION NAME) — 67-73 (YEARS) — JAN (MONTH)

ALL WEATHER (CLASS) — 0700-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	4.0	1.7	1.0	.2							9.2	5.5
NNE	3.2	5.3	5.3	3.6	.7	.1						18.3	7.8
NE	2.8	9.3	9.1	5.9	1.1	.1						25.4	8.4
ENE	1.4	3.5	7.1	5.6	1.9							19.5	10.0
E	1.5	3.2	3.1	2.1	.3							10.4	8.1
ESE	.5	.3	.1	.2								1.1	5.6
SE	.3											.3	1.7
SSE	.1	.1	.1	.1	.1							.4	9.0
S	.1	.3	.1	.1								.7	5.8
SSW	.3	.2	.2	.1	.1							1.0	7.7
SW	.3	.1	.1									.6	4.2
WSW			.1		.1							.2	14.0
W	.1	.6										.7	4.3
WNW	.6	.2										.8	2.9
NW	.8	.2	.2			.1						1.4	5.4
NNW	1.0	1.0	.3	.2	.3							3.0	6.4
VARBL	.3	.2										.6	3.4
CALM												6.4	
	15.3	29.7	27.9	19.2	5.0	.3						100.0	7.6

TOTAL NUMBER OF OBSERVATIONS 879

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	1.1	2.5	.9	.1							5.4	7.3
NNE	1.5	2.0	3.0	2.0	.7	.3						9.5	9.1
NE	1.8	4.1	4.5	5.3	.4	.1						15.2	8.0
ENE	1.8	4.2	6.8	6.0	1.1	.2						20.2	9.2
E	3.0	4.9	3.6	2.2	.4							14.2	7.3
ESE	1.5	1.7	.3									3.5	4.0
SE	.5	.9	.1	.2								1.8	4.9
SSE	.9	.6	.3	.2								2.0	5.2
S	.9	.8	.2	.2		.1						2.2	5.9
SSW	.1	.3	.2	.1	.3	.1						1.2	12.3
SW	.6	.6	.4	.2	.1		.1					2.0	7.8
WSW	.9	1.2										2.1	3.5
W	.8	.9	.3		.1							2.1	4.3
WNW	.8	.1			.1							1.0	4.4
NW	.6	.2	.1	.3	.1							1.3	7.5
NNW	.4	.4	.1	.2	.7	.1						2.0	11.4
VARBL	1.5	.8										2.3	3.1
CALM												10.8	
	18.2	25.0	22.6	18.0	4.2	1.0	.1					100.0	7.0

TOTAL NUMBER OF OBSERVATIONS 895

USAFETAC FORM AUG 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-72 (YEARS) ALL (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.7	1.5	1.2	.2	.2						5.7	5.5
NNE	.8	2.5	2.7	1.8	.9							8.7	5.4
NE	1.8	3.8	5.0	2.0	.3							13.6	5.0
ENE	2.9	3.5	3.8	3.0	.7	.1						14.8	5.2
E	2.7	3.4	2.2	.9	.3							9.5	5.2
ESE	1.7	1.7	.2	.3								3.9	4.8
SE	1.6	.8	.1	.3								2.8	4.3
SSE	1.3	1.0	.2	.1								2.7	4.1
S	2.5	1.8	.1	.2		.1						4.7	4.3
SSW	1.4	1.0	.4	.3	.2	.3						4.4	7.3
SW	1.0	2.2	.4				.1					3.8	5.1
WSW	1.0	1.3		.1								2.5	4.0
W	1.1	1.5			.1							2.7	4.4
WNW	.6	.8	.3	.3	.1							2.1	6.3
NW	.3	.3		.3	.2							1.0	10.4
NNW	.2	.8	.4	.7	.1							2.2	8.4
VARBL	.7	.2										.9	2.9
CALM												.43	
	22.8	28.3	17.6	13.1	3.0	.4	.1					100.0	5.9

TOTAL NUMBER OF OBSERVATIONS 492

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33366 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) 7-7 (YEARS) (MONTH)

ALL WEATHER (CLASS) 1-24 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	3.0	2.0	1.4	.3							8.7	7.2
NNE	3.9	9.4	6.5	2.4	.1							22.3	7.2
NE	4.2	13.9	5.5	4.2	.4	.1	.1					28.4	7.3
ENE	2.6	5.9	3.1	2.4	.4	.1						14.7	7.
E	1.1	1.4	1.2	.0								4.3	6.1
ESE	.6	.4	.4									1.4	4.3
SE		.3	.2	.1	.1							.8	9.4
SSE	.4	.2	.1									.8	5.3
S	.3	.2	.4	.1								1.1	6.1
SSW	.2	.3	.1	.1								.7	5.7
SW	.6	.3		.2	.1		.1					1.3	8.3
WSW	.4	.3			.1							.7	5.7
W	1.1		.1	.1								1.3	3.3
WNW	.2	.3										.6	5.4
NW		.1		.2	.4							.6	13.3
NNW	.2	.6	.4	.2								1.4	6.5
VARBL	.3	.3										.7	3.1
CALM												10.0	
	18.4	37.2	20.2	11.6	1.9	.4	.2					100.0	6.0

TOTAL NUMBER OF OBSERVATIONS 637

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) -7-7- (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.9	4.5	2.0	1.0	.1							9.5	5.3
NNE	3.3	11.9	6.3	1.2	.3							22.1	5.4
NE	3.9	13.8	10.8	4.2	.2							33.0	5.8
ENE	1.9	4.9	4.0	1.0								12.4	5.3
E	.3	1.5	1.1	.4	.2							3.9	8.5
ESE	.2	.9										1.1	4.4
SE		.1	.1									.2	7.0
SSE	.3		.1									.4	3.3
S	.1	.2	.2	.1	.2							1.1	10.7
SSW	.1		.1	.1	.1	.1						.6	12.8
SW		.2		.2								.4	10.5
WSW				.1								.1	15.0
W		.1	.2									.3	7.3
WNW	.2			.1								.3	5.3
NW	.4	.6										1.0	3.2
NNW	1.0	1.0	.2	.1								2.3	4.6
VARBL	.6	.3										.9	3.1
CALM												6.1	
	14.5	40.1	27.9	10.0	1.2	.1						100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 896

USAFETAC FORM JA 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-74 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1900-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N													
NNE	.3	.1	.1	.4	.3							1.1	11.1
NE	.1	.1	.1									.4	5.3
ENE		.4	.3									.6	5.8
E	.1	.3	.1									.5	4.8
ESE	.5	.3	.4									1.1	4.8
SE	.4	1.1	.1									1.7	4.7
SSE	1.3	1.8	.9									3.9	4.9
S	2.5	10.7	6.9	1.0	.1							21.3	6.2
SSW	1.9	9.2	13.6	5.2								29.9	7.9
SW	1.7	7.3	11.7	5.7	.1							26.5	8.2
WSW	.9	2.0	3.3	2.4	.1							8.8	8.5
W	.4	.3	.3	.1								1.0	5.4
WNW		.1										.1	4.0
NW													
NNW	.1											.1	3.0
VARBL	.1	.1										.3	3.0
CALM												2.5	
	10.3	33.8	37.8	14.9	.6							100.0	7.2

TOTAL NUMBER OF OBSERVATIONS 785

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33302 STATION — I.CIRLIK AB TURKEY/ADANA STATION NAME — 67-75 YEARS — JUL MONTH

ALL WEATHER CLASS — 2100-2300 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N		.3	.3									.5	5.3
NNE	.5	.6	.4	.0								2.2	7.4
NE	1.7	1.2										2.8	3.4
ENE	1.4	.9										2.3	3.2
E	2.0	1.2	.4									3.6	3.6
ESE	3.7	1.9	.1									5.8	3.1
SE	5.4	2.6	.5									7.3	3.1
SSE	8.1	7.5	1.0									16.6	3.6
S	8.4	10.9	1.3									20.6	3.9
SSW	3.5	4.5	.9									8.8	4.3
SW	1.3	2.2	.8		.1							4.3	5.1
WSW	.6	.3										.9	3.1
W	.1											.1	2.0
WNW	.1											.1	2.0
NW													
NNW	.1											.1	2.0
VARBL	1.2											1.2	1.8
CALM												22.1	
	38.0	33.5	5.6	.0	.1							100.0	3.0

TOTAL NUMBER OF OBSERVATIONS 782

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.2	.1									1.0	3.4
NNE	2.6	4.0	.1	.4								7.1	4.2
NE	10.4	11.3	.3	.4								23.0	3.8
ENE	3.9	6.3	.5									10.7	3.9
E	4.7	2.4	.2									7.3	3.1
ESE	4.4	1.4										5.7	2.9
SE	2.4	1.4	.1									3.9	3.2
SSE	2.9	2.1	.1									5.1	3.3
S	3.2	1.9										5.1	3.0
SSW	.2	.4	.1									.7	4.3
SW	.1	.1										.2	4.5
WSW	.1											.1	2.0
W	.2											.2	2.0
WNW		.1										.1	4.0
NW	.1											.1	2.0
NNW	.1	.2										.4	4.0
VARBL	1.0	.1										1.1	2.3
CALM												28.0	
	37.1	32.0	2.3	.7								100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 804

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 67-76 (YEARS) | AUG (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.4	.1									2.4	3.9
NNE	5.9	6.6	1.0	.6								14.1	4.4
NE	17.9	21.3	1.6	.4								41.2	3.8
ENE	6.4	6.0	.6	.1								13.1	3.7
E	2.9	1.4										4.2	3.1
ESE	1.9	.5										2.4	2.7
SE	.9	.2	.1									1.2	3.4
SSE	1.6	.4	.1									2.1	2.9
S	1.2	.5										1.7	2.9
SSW	.4	.1										.5	3.3
SW	.1		.1									.2	5.0
WSW													
W	.1	.1										.2	3.0
WNW	.1	.1										.2	3.0
NW		.1										.1	6.0
NNW	.4	.2										.6	3.0
VARBL	.5											.5	2.8
CALM												15.1	
	41.1	39.0	3.7	1.1								100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 803

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0000-0600 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	.7	.2	.4								2.9	4.8
NNE	3.2	3.6	.6	.7	.1							8.3	4.8
NE	7.1	6.8	2.0	.7								16.6	4.5
ENE	3.5	2.4	.6	.5								6.9	4.4
E	2.4	1.9										4.2	2.5
ESE	.7	.6	.1									1.5	3.4
SE	1.1	.6										1.7	3.1
SSE	1.6	1.5										3.1	3.3
S	2.0	2.5	.5									5.0	4.1
SSW	3.5	3.1	.6	.2								7.4	4.1
SW	1.6	1.6		.1	.1							3.5	4.1
WSW	1.2	2.0	.2									3.5	3.9
W	1.0	1.5										2.5	3.4
WNW	.9	.9										1.7	3.2
NW	.5	.6										1.1	3.3
NNW	1.2	.9	.2									2.4	3.6
VARBL	3.1	.6										3.7	2.2
CALM												24.0	
	36.1	31.7	5.2	2.7	.2							100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 807

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33302 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-71 (YEARS) 6/10 (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.4	1.6	.7								3.1	5.0
NNE		.5	.2	.4								1.2	7.9
NE		.1	.6	.1								.9	9.4
ENE	.2	.1	.1									.5	4.3
E	.5	.7	.4									1.6	5.4
ESE	.2	.1										.4	3.3
SE	.1	.7										.9	4.6
SSE	.7	2.5	.7	.1								4.0	5.2
S	2.7	9.8	3.2	.7								16.4	5.6
SSW	2.9	12.1	6.3	.9	.2							22.5	5.5
SW	1.8	8.2	4.0	.4	.1							14.6	6.0
WSW	1.9	7.4	2.0									11.5	5.3
W	2.2	4.8	1.7	.1								8.8	5.1
WNW	1.1	.5	.6									2.6	4.4
NW		.1	.1									.2	6.0
NNW		.2	.1									.6	6.0
VARBL	2.9	2.9										5.9	3.5
CALM												4.3	
	17.5	51.9	22.8	3.1	.4							100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 815

USAFETAC FORM JUL 66 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33358	INCIRLIK AB TURKEY/ADANA	67-76	AUG
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N		.4	.1									.5	9.0
NNE	.1	.4		.1								.6	9.0
NE		.2	.2									.5	6.8
ENE			.1									.1	10.0
E		.2										.2	5.0
ESE		.4	.1									.5	5.5
SE	.1		.1									.2	6.0
SSE		.2	.2	.1								.6	7.4
S	.5	3.6	6.8	4.5								15.3	9.0
SSW	.4	5.2	16.6	9.2	.5							31.8	9.6
SW	.2	5.2	10.4	10.0	.5	.1						26.4	9.9
WSW	.4	2.8	7.2	3.7	.2							14.4	9.1
W		1.1	2.7	1.9	.2							5.9	10.0
WNW		.4	.4	.2								1.0	8.0
NW													
NNW			.1	.2								.4	12.0
VARBL	.1	1.3										1.4	4.3
CALM												.1	
	1.8	21.4	45.1	30.0	1.4	.1						100.0	9.3

TOTAL NUMBER OF OBSERVATIONS 829

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-74 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N			.1	.1								.2	12.0
NNE													
NE													
ENE			.1									.1	10.0
E				.1								.1	12.0
ESE		.1										.1	6.0
SE			.2	.1								.4	9.7
SSE			.2	.2								.5	11.0
S		.2	4.1	5.8								10.1	11.3
SSW		.6	11.9	15.9	.5							28.9	11.5
SW	.1	.5	9.5	23.1	1.1							34.3	12.1
WSW		.4	3.7	14.2	.4							18.6	12.3
W		.5	1.1	3.1	.5							5.2	12
WNW			.2									.2	.
NW		.1		.1								.2	10.
NNW			.1	.4	.1							.6	13.2
VARBL		.2										.2	4.0
CALM													
	.1	2.7	31.4	63.2	2.8							100.0	11.9

TOTAL NUMBER OF OBSERVATIONS 310

USAFETAC FORM AUG 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33309 (STATION) — INCIRLIK AB TURKEY/ADANA (STATION NAME) — 67-75 (YEARS) — AUG (MONTH)

ALL WEATHER (CLASS) — 1200-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N		.4			.1							.5	9.3
NNE		.2	.1									.4	6.7
NE		.1										.1	4.0
ENE	.2		.5									.7	6.5
E	.1	.4		.1								.6	5.0
ESE	.1	.5	.1									.7	4.9
SE	.6	.6	.1									1.4	4.3
SSE	1.6	2.7	.9	.1								5.3	4.6
S	6.0	12.8	7.7	1.1								27.3	5.5
SSW	1.8	9.1	6.6	2.8			.1					22.3	7.1
SW	1.6	8.4	11.9	3.1								25.0	7.3
WSW	.5	2.6	3.2	2.0								8.2	8.0
W	.1		.5	.1	.1							.9	9.7
WNW		.1	.1									.2	6.0
NW		.1										.1	6.0
NNW	.1											.1	2.0
VARBL	.5	.6										1.1	3.3
CALM												4.1	
	14.0	38.8	33.8	9.1	.2		.1					100.0	6.3

TOTAL NUMBER OF OBSERVATIONS 813

USAFETAC FORM AA 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-71 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2		.2									.5	5.0
NNE	.5	.7	.5									1.7	5.1
NE	1.8	4.0	.5									6.3	4.1
ENE	1.3	1.7										3.1	3.6
E	3.5	2.6	.4	.1								6.6	3.7
ESE	6.1	2.9	.1									9.2	3.3
SE	6.3	2.9	.2									9.5	3.3
SSE	7.8	5.3	.4									13.4	3.5
S	9.4	6.2	1.1									16.7	3.4
SSW	2.9	1.5	.1									4.5	3.2
SW	.7	1.0										1.7	3.7
WSW	.5	.5										1.0	3.8
W	.1	.1										.2	3.0
WNW	.2											.2	2.5
NW													
NNW	.1				.1							.2	10.0
VARBL	1.1	.2										1.3	2.4
CALM												23.7	
	62.9	29.7	3.5	.1	.1							100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 819

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) İNCİRLİK AB TURKEY/ADANA (STATION NAME) 66-71 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.3	.9	.3								3.5	6.3
NNE	3.5	9.8	3.0	.6								16.9	5.2
NE	9.0	24.4	6.0	.9								40.9	5.0
ENE	3.2	11.3	1.3	.5								16.2	4.7
E	2.7	2.4	.8	.1								6.0	4.4
ESE	1.5	.9										2.4	3.0
SE	.6	.1										.7	2.7
SSE	.2	.1										.3	2.7
S	.2	.2	.1									.6	4.4
SSW		.1	.1									.2	6.5
SW		.2										.2	4.0
WSW		.2										.2	4.5
W			.1		.1							.2	14.0
WNW	.1											.1	2.0
NW	.1	.2										.3	3.3
NNW	.1	.1	.1									.3	5.0
VARBL	1.4											1.4	2.1
CALM												9.5	
	23.7	51.4	13.0	2.4	.1							100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 878

USAFETAC FORM AWS 60 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) 01 (MONTH)

ALL WEATHER (CLASS) 0300-0900 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	2.1	1.2	.4								5.7	5.4
NNE	6.1	11.4	3.1	.4	.1							21.6	5.1
NE	9.1	29.1	6.3	1.2	.1							45.9	5.3
ENE	2.4	8.6	1.7									12.6	4.6
E	1.0	1.5										2.5	3.3
ESE	.1	.5										.5	4.3
SE		.1										.1	4.3
SSE	.1											.1	2.3
S	.3	.1										.5	2.5
SSW	.1	.3										.5	3.5
SW	.1	.5										.2	3.3
WSW	.1											.1	2.3
W		.2										.2	5.3
WNW	.1	.1										.2	3.0
NW	.2	.1	.2									.6	4.8
NNW	.3	1.3	.1									1.6	4.6
VARBL	.5	.6										1.0	3.3
CALM												5.6	
	22.7	56.3	12.9	2.4	.2							100.0	4.6

TOTAL NUMBER OF OBSERVATIONS 867

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

333x2 (STATION) I.CIPLIK AB TURKEY/ADANA (STATION NAME) -67- (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 0300-0900 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.1	3.1	1.0	.1								7.4	[illegible]
NNE	5.3	8.0	3.3	1.0	.3							17.0	[illegible]
NE	6.0	13.5	4.4	2.3	.5							26.7	[illegible]
ENE	3.4	6.4	1.0	.3								11.7	[illegible]
E	2.1	1.7	.3	.2								4.3	[illegible]
ESE	.9	.8										1.7	3.2
SE	1.0	.2	.1	.1								1.5	4.3
SSE	.8	.2										1.0	2.7
S	.5	.3										.7	3.1
SSW	.6	.8	.1									1.7	3.7
SW	.6	.6										1.2	3.3
WSW	.3	.5										.8	3.4
W	.7	.9		.1								1.7	3.9
WNW	.2	.6	.1	.1								1.0	5.2
NW	.5	.6										1.0	3.8
NNW	.8	1.3	.2									2.3	4.0
VARBL	1.5	.6										2.1	2.9
CALM												14.4	
	29.7	40.1	10.2	4.8	.8							100.0	4.2

TOTAL NUMBER OF OBSERVATIONS 866

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33369 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 56-75 (YEARS) (MONTH)

(CLASS) (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.6	1.1	.8	.7	.1							4.3	5.3
NNE	.9	1.7	1.1	1.2	.5	.1						5.2	7.1
NE	.9	1.2	1.1	1.4	.5							5.1	7.0
ENE	.9	.6	1.1	.3	.2							3.3	7.2
E	1.0	3.0	.8	.3								5.3	5.7
ESE	.9	1.3	.9	.3								3.3	5.3
SE	1.6	1.9	.2									3.7	4.3
SSE	2.3	2.3	.9		.1							5.7	4.9
S	4.1	7.0	1.7	.2								13.0	4.6
SSW	2.3	6.9	1.3	1.0								11.6	5.5
SW	1.9	3.2	1.8	.1	.1							6.8	5.5
WSW	1.4	2.9	1.2		.1							5.6	5.2
W	2.7	3.7	.7									7.1	4.1
WNW	.6	.8	.1									1.5	4.4
NW	.8	.9	.3									2.0	4.0
NNW	1.2	.8	.1									2.1	3.4
VARBL	2.8	1.7										4.5	3.0
CALM												10.0	
	27.3	41.1	16.1	5.9	1.8	.1						100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 888

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 60-76 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.6	.5	.6		.2						2.5	9.5
NNE		.3	.7	.6	.1							1.7	11.3
NE	.1	.5	1.0	.5	.1							2.3	9.4
ENE	.1	.6	.7	.3								1.7	7.3
E	.5	.8	.3	.1								1.7	5.0
ESE	.2	.5	.2	.3								1.2	7.3
SE	.5	.8	.5	.2								1.9	6.6
SSE	.2	1.2	1.0	.6								3.1	7.4
S	1.5	5.9	5.7	3.1	.5							16.6	7.8
SSW	.7	6.2	8.3	5.9	.5	.1						21.2	8.5
SW	1.2	5.1	6.2	4.2	.3	.1						17.2	8.5
WSW	1.4	4.6	4.4	1.1	.2							11.8	7.2
W	1.0	3.2	1.3	.3								5.5	5.3
WNW	.1	.5	.3									1.4	5.9
NW	.3	.4	.3									1.0	5.4
NNW	.2	.3				.1						.7	7.1
VARBL	1.4	2.7										4.1	3.7
CALM												3.3	
	9.9	36.8	32.1	17.9	1.7	.4						100.0	7.5

TOTAL NUMBER OF OBSERVATIONS 582

USAFETAC FORM AA 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33306 — STATION
I.CIRLIK AB TURKEY/ADANA — STATION NAME
66-74 — YEARS
SEP — MONTH
ALL WEATHER — CLASS
1500-1700 — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.3	.7	.6	.1	.1		.1				2.0	12.1
NNE	.1	.2	.3	.3	.2							1.4	11.0
NE		.2	.8	.7								1.7	9.7
ENE	.2	.2	.2	.2								.9	7.0
E		.3	.5									.8	7.1
ESE		.2		.1								.3	7.7
SE	.1	.1										.2	4.5
SSE		.1	.1	.1								.3	6.3
S	.3	1.1	3.4	3.4	.2							8.3	9.8
SSW		2.2	6.3	9.1	.9							20.5	10.9
SW	.1	2.4	11.9	15.5	.6	.1						30.5	10.9
WSW	.1	1.7	8.6	12.5	.2							23.2	10.8
W	.5	1.0	2.3	2.4	.2	.1						6.5	10.0
WNW		.2		.2								.5	9.3
NW		.2	.2	.2								.7	9.0
NNW		.2	.2	.2	.2							.9	11.3
VARBL	.1	.2										.3	4.3
CALM												.4	
	1.7	11.8	37.7	45.5	3.0	.3		.1				100.0	10.8

TOTAL NUMBER OF OBSERVATIONS 879

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 66-72 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1300-2100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.7	.2	.3								1.6	5.3
NNE	.4	2.0	.4	.3	.1							3.4	6.7
NE	.4	1.2	.6	.2								2.5	6.0
ENE	.3	.9	.3	.1								1.7	5.6
E	.8	.6	.2									1.6	3.9
ESE	.8	1.0	.1				.1					2.0	5.2
SE	1.9	.4										2.4	2.6
SSE	2.0	1.7	.3									4.0	3.7
S	6.3	3.9	1.5	.2	.1							12.0	4.7
SSW	4.7	5.8	3.5	.6								14.6	5.3
SW	4.4	10.4	5.4	.9								21.1	5.6
WSW	1.8	6.5	4.0	.1								12.4	5.3
W	1.1	2.7	1.1	.1								5.0	5.4
WNW	.4	.6										1.0	3.9
NW	.4	.2										.7	3.8
NNW	.4	.4	.2	.1								1.2	5.6
VARBL	.9	.2										1.1	2.0
CALM												11.9	
	27.5	39.3	17.9	3.0	.2		.1					100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 893

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (PERIOD) MAR (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
MAR	00-02	100.0	100.0	99.6	95.2	92.2	86.2	76.7	57.3	32.0	79.6	820
	03-05	100.0	100.0	99.5	94.9	88.8	82.1	71.0	51.2	32.0	77.5	816
	06-08	100.0	100.0	97.8	92.0	84.2	73.8	61.2	42.1	22.1	73.1	814
	09-11	99.8	97.4	90.2	76.4	61.6	41.1	25.0	7.9	2.7	55.9	815
	12-14	99.6	95.8	82.1	65.3	46.4	27.1	13.9	5.9	1.5	49.3	815
	15-17	99.9	96.2	87.3	71.3	54.2	33.9	18.7	6.9	1.2	52.4	813
	18-20	100.0	100.0	98.3	94.0	87.2	75.8	57.2	28.8	8.4	70.4	829
	21-23	100.0	99.9	98.7	96.2	93.3	89.8	81.7	58.0	25.7	79.6	824
TOTALS		99.9	98.7	94.2	85.7	76.0	63.7	50.7	32.3	15.7	67.2	6546

USAPETAC FORM AUG 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 07-76 (PERIOD) APR (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
APR	00-02	100.0	100.0	99.6	98.6	96.6	91.4	85.4	69.7	42.0	83.7	788
	03-05	100.0	100.0	99.4	97.6	95.1	90.1	84.7	73.0	48.9	84.2	799
	06-08	100.0	100.0	99.6	97.2	90.8	82.5	71.4	48.5	23.0	76.9	781
	09-11	100.0	99.5	95.4	81.1	62.2	40.1	20.7	7.9	1.6	56.4	798
	12-14	100.0	97.9	84.2	65.9	45.2	25.6	13.4	8.3	2.6	49.8	774
	15-17	100.0	98.9	87.4	71.7	50.5	32.1	17.5	8.1	2.5	52.3	794
	18-20	100.0	100.0	98.9	95.0	85.0	70.7	50.1	26.7	9.1	68.9	794
	21-23	100.0	100.0	99.6	98.1	96.6	91.9	81.9	59.8	27.9	81.3	791
TOTALS		100.0	99.5	95.8	88.2	77.8	65.6	53.1	37.8	19.7	69.2	6319

USAFETAC FORM AUG 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 07-76 (PERIOD) MAY (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
MAY	00-02	100.0	100.0	99.6	98.5	96.0	93.9	88.5	77.4	41.2	85.1	784
	03-05	100.0	100.0	100.0	98.7	96.3	94.5	89.5	78.6	53.3	86.7	780
	06-08	100.0	99.9	99.1	96.9	91.5	84.1	67.7	41.4	12.5	74.7	781
	09-11	100.0	97.8	91.5	77.5	58.0	31.9	11.5	4.9	1.1	53.0	790
	12-14	100.0	94.4	81.6	62.6	37.6	16.1	5.8	2.6	1.0	45.7	800
	15-17	99.9	97.0	87.3	68.3	40.8	19.0	7.5	3.4	.9	48.1	772
	18-20	100.0	99.5	97.7	90.3	77.8	59.5	35.3	16.3	4.3	63.7	793
	21-23	100.0	99.9	99.6	98.1	94.7	92.1	83.5	62.1	17.2	80.1	786
TOTALS		100.0	98.6	94.6	86.4	74.1	61.4	48.7	35.8	16.4	67.1	6286

USAFETAC FORM AIR 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (PERIOD) JUN (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUN	00-02	100.0	100.0	98.7	96.8	94.2	91.8	87.3	74.6	25.7	82.5	779
	03-05	100.0	100.0	99.4	97.4	95.6	93.9	90.6	81.0	43.9	85.5	773
	06-08	100.0	99.1	96.0	92.3	88.7	81.2	58.4	31.7	5.7	71.1	794
	09-11	99.9	95.0	87.2	75.1	51.7	16.8	2.0	.4	.1	48.8	804
	12-14	99.6	92.3	78.0	61.5	23.2	3.0	1.0	.6	.1	41.6	788
	15-17	100.0	95.3	83.7	62.5	35.3	7.8	2.8	1.7	.4	44.6	784
	18-20	100.0	99.1	93.4	85.1	72.2	53.0	23.2	4.1	1.0	58.9	790
	21-23	100.0	100.0	99.4	97.6	93.2	87.3	76.1	47.5	6.0	76.1	785
TOTALS		99.9	97.6	92.2	83.5	69.3	54.4	42.7	30.2	10.4	63.6	6297

USAFETAC FORM JUL 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 INCIRLIK AB TURKEY/ADANA 67-76 JUL
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUL	00-02	100.0	100.0	97.7	96.2	95.3	94.7	90.1	68.5	10.4	80.6	768
	03-05	100.0	99.6	97.9	96.0	94.2	93.2	91.2	80.9	22.9	83.0	747
	06-08	100.0	99.1	95.4	93.4	90.7	85.9	62.9	31.3	4.5	72.0	761
	09-11	99.9	96.1	90.7	83.3	64.3	18.5	1.1	.1		51.0	761
	12-14	99.7	94.5	86.0	74.1	26.6	1.4	.5	.1	.1	44.6	779
	15-17	100.0	97.9	91.6	76.0	45.9	8.7	.1			47.6	778
	18-20	100.0	99.2	98.3	91.2	80.9	59.3	25.5	2.8		61.8	781
	21-23	100.0	99.4	98.1	97.8	90.6	91.6	82.7	44.1	2.3	77.0	775
TOTALS		100.0	98.2	94.5	88.3	75.6	56.7	44.3	28.5	5.0	64.7	6150

USAFETAC FORM AIR 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (PERIOD) AUG (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
AUG	00-02	100.0	100.0	98.9	98.2	96.7	94.9	88.3	64.0	9.8	80.5	797
	03-05	100.0	100.0	98.6	96.7	95.6	94.7	92.0	77.7	16.3	82.6	797
	06-08	100.0	99.3	96.2	94.5	92.6	89.6	69.6	36.4	5.8	73.9	806
	09-11	99.4	96.0	91.9	87.3	67.5	21.1	2.0	.1	.1	52.1	806
	12-14	99.3	95.7	87.2	73.1	26.5	2.0	.1	.1		43.6	818
	15-17	100.0	99.1	93.4	78.7	46.5	8.0	.9	.5		48.1	804
	18-20	100.0	100.0	99.5	94.4	84.9	63.3	28.2	4.7	.2	63.5	806
	21-23	100.0	100.0	99.8	99.4	98.0	91.5	80.2	43.6	3.3	77.2	809
TOTALS		99.8	98.8	95.7	90.3	76.0	58.1	45.2	28.4	4.4	65.2	6443

USAFETAC FORM 0-8745 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (PERIOD) SEP (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
SEP	00-02	100.0	99.7	98.7	94.1	90.3	87.0	77.3	47.8	9.3	75.8	874
	03-05	100.0	99.8	98.2	93.4	88.1	83.4	77.9	58.5	16.3	76.9	873
	06-08	99.9	99.3	93.3	86.4	80.7	73.4	55.3	29.3	7.2	68.0	856
	09-11	99.9	90.6	77.3	67.1	46.7	14.4	2.2	.6	.2	45.5	882
	12-14	98.6	84.3	69.2	43.3	11.2	1.9	1.4	.8	.3	36.7	877
	15-17	99.1	91.3	78.4	63.4	30.8	6.9	1.7	.6	.2	42.9	874
	18-20	100.0	99.9	96.3	89.7	79.1	57.0	23.8	3.7	.2	60.5	891
	21-23	100.0	99.5	98.2	94.5	90.5	83.8	65.8	31.7	3.1	72.0	877
TOTALS		99.7	95.6	88.7	79.0	64.7	51.0	38.2	21.6	4.6	59.8	7004

USAPETAC FORM AUG 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (PERIOD) OCT (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
OCT	00-02	100.0	99.5	96.9	92.7	83.9	71.9	60.4	40.9	10.3	71.1	882
	03-05	100.0	99.3	97.6	91.3	82.3	70.7	61.6	40.9	14.3	71.2	900
	06-08	100.0	98.9	93.8	83.5	71.2	59.5	43.3	26.0	7.8	63.8	896
	09-11	99.6	92.8	73.2	55.9	36.6	17.0	6.5	3.2	1.0	43.9	902
	12-14	98.8	85.2	59.1	37.7	14.7	6.9	2.7	1.6	.3	36.2	912
	15-17	99.7	90.3	70.1	50.1	26.6	11.0	4.2	2.3	.9	41.3	897
	18-20	100.0	99.1	96.1	86.5	72.2	55.6	28.8	10.3	1.7	60.3	896
	21-23	100.0	99.7	96.5	92.8	83.2	70.4	55.7	27.4	5.4	68.5	893
TOTALS		99.8	95.6	85.4	73.8	58.8	45.4	32.9	19.1	5.2	57.0	7178

USAFETAC FORM JUL 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

333U8 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (PERIOD) NOV (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
NOV	00-02	100.0	100.0	98.7	93.9	83.6	69.6	55.8	35.5	15.5	70.9	912
	03-05	100.0	100.0	98.8	93.8	82.6	68.7	52.7	32.6	12.9	69.7	916
	06-08	100.0	99.8	97.9	90.5	77.2	61.3	45.6	28.1	11.6	66.5	912
	09-11	100.0	95.7	78.2	57.0	41.1	26.7	18.0	8.9	4.1	48.5	901
	12-14	100.0	89.2	63.1	42.3	26.9	17.0	10.4	6.4	3.2	41.3	873
	15-17	99.9	93.6	76.7	58.4	40.3	25.6	15.5	8.4	3.7	47.7	891
	18-20	100.0	99.7	97.5	91.7	82.3	63.0	43.8	21.0	6.9	66.2	895
	21-23	100.0	100.0	99.1	94.3	84.5	73.4	57.6	33.9	15.4	71.2	912
TOTALS		100.0	97.3	88.8	77.7	64.8	50.7	37.4	21.9	9.2	60.3	7212

USAFETAC FORM AM 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

3 | 3430 | I CIRLIK AB TURKEY/ADANA | 65-74 | 2 | ALL A/C TYPE | 0000-2400

STATION | STATION NAME | YEARS | MONTH | CLASS | HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.8	.3	.1								2.7	4.2
NNE	1.4	3.2	2.0	.7								7.2	5.1
NE	3.9	14.1	1.9	.5								20.4	5.3
ENE	3.5	7.4	.6	.2								11.7	4.8
E	4.7	5.4	.5	.1								10.7	3.9
ESE	3.0	3.3	.1									7.2	3.5
SE	2.9	1.6										4.5	2.8
SSE	3.3	1.6	.2									5.1	3.1
S	1.9	1.8										3.7	3.3
SSW	.6	.2	.1									.9	3.4
SW	.9	.6										1.5	3.1
WSW	.3	.1										.5	2.9
W	.1	.2										.3	3.7
WNW	.1											.1	2.3
NW		.2										.2	4.3
NNW	.2	.3	.1	.1								.9	5.2
VARBL	.9	.2										1.1	2.9
CALM												21.3	
	29.2	41.0	5.9	1.7								100.0	3.3

TOTAL NUMBER OF OBSERVATIONS 868

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33360 (STATION) | I. CIRLIK AB TURKEY/ADANA (STATION NAME) | 66-7. (YEARS) | 01 (MONTH)

ALL WEATHER (CLASS) | 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.3	4.3	.1									6.7	3.5
NNE	4.2	11.7	4.4	.5	.1							21.1	5.4
NE	7.0	25.9	5.2	1.1	.3							39.5	5.3
ENE	4.4	7.7	.3	.3	.1							12.9	4.1
E	.6	.9										1.5	3.5
ESE	.4	.2	.1									.6	4.3
SE	.1											.1	1.3
SSE	.1	.1										.2	4.0
S	.1											.1	2.3
SSW	.3			.1								.5	4.3
SW	.3	.2		.1								.7	4.5
WSW				.1								.1	11.0
W		.1	.1	.2								.5	10.3
WNW	.7	.2	.1									1.0	3.7
NW	.3	.5	.2									1.0	4.7
NNW	.3	.6		.1								1.0	3.6
VARBL	.4	.1										1.0	1.9
CALM												10.5	
	22.9	51.5	11.3	3.4	.6							100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 887

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) OCT (MONTH)

ALL WX THR (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.0	3.2	.3	.3								7.9	4.1
NNE	5.7	13.8	4.3	.9	.1							24.8	5.2
NE	6.2	21.6	5.7	1.4	.4							35.4	5.6
ENE	1.6	5.6	.7	.2								8.0	5.3
E	.7	1.4	.3									2.4	4.5
ESE	.1	.2										.3	3.3
SE	.1	.1		.1								.3	7.3
SSE	.1											.1	2.0
S	.1	.1										.2	3.5
SSW		.1		.1								.2	7.0
SW		.1										.1	4.0
WSW	.3											.3	2.3
W	.2											.2	1.5
WNW	.6	.1										.9	2.5
NW	.3	.1										.4	2.5
NNW	1.6	1.2										2.8	3.3
VARBL	1.0	.4										1.4	2.7
CALM												13.0	
	23.6	48.2	11.8	3.1	.6							100.0	4.6

TOTAL NUMBER OF OBSERVATIONS 899

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33390 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 6?-75 (YEARS) | CT (MONTH)

ALL WX (CLASS) | 0600-0900 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.1	4.0	.4	.4	.1							8.9	4.1
NNE	4.5	9.3	4.9	1.0	.4							19.9	5.5
NE	4.9	14.3	6.0	3.0	.4							28.5	5.3
ENE	2.1	4.2	2.2	.7	.1							9.4	5.0
E	1.5	1.1	.3									3.1	3.0
ESE	.3	.8	.1									1.2	4.0
SE	.4	.1										.4	3.4
SSE	.3	.1										.4	2.3
S	.1			.1								.2	3.5
SSW	.1	.2										.3	4.7
SW	.1											.1	2.0
WSW	.2	.2		.1								.6	5.2
W	1.0	.7										1.7	3.9
WNW	1.4	.7										1.9	2.9
NW	1.3	.4										1.8	2.7
NNW	2.1	.8		.1								3.5	3.0
VARBL	1.2	.1										1.7	2.1
CALM												16.5	
	26.5	36.9	13.9	5.3	.9							100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 905

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

333U8 — STATION
I.CIRLIK AB TURKEY/ADANA — STATION NAME
[illegible] — YEARS
[illegible] — MONTHS
[illegible] — CLASS
[illegible] — HOURS (L.S.T.)
[illegible] — CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥ 56	%	MEAN WIND SPEED
N	1.5	1.9	.7	.1								4.2	4.5
NNE	2.1	3.1	3.8	2.0	.4							11.4	7.3
NE	1.3	3.6	4.8	4.2	.5							14.4	7.3
ENE	1.8	2.2	2.3	2.2								.7	7.1
E	2.7	3.6	3.0	.2								9.6	5.6
ESE	1.3	1.8	1.0	.1								4.4	5.1
SE	1.8	1.2	.4	.1								3.5	4.2
SSE	1.5	1.2										2.7	3.2
S	2.6	1.9	.3									4.8	3.8
SSW	1.4	1.8	1.1	.1								4.4	4.2
SW	.5	1.9	.1	.2								2.7	4.9
WSW	1.1	.5	.2									1.8	3.4
W	2.2	1.6	.4	.1								4.4	3.1
WNW	.3	.7	.2									1.2	4.5
NW	.9	.5	.2									1.6	4.0
NNW	.9	.7	.2									1.8	3.9
VARBL	2.5	1.5										4.1	2.8
CALM												14.0	
	26.8	29.7	19.1	9.4	1.0							100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 912

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

17369	I.CIRLIK AB TURKEY/ADANA	66-74	01
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.4	.7	.3								3.4	5.5
NNE	1.4	.5	2.2	.5								4.7	6.6
NE	.5	1.6	1.4	1.4		.1						5.1	8.2
ENE	.7	2.3	2.0	.4								5.3	5.7
E	2.0	3.6	1.7									7.3	5.3
ESE	1.3	1.9	.7	.1								4.1	4.3
SE	1.4	1.7	.3	.1								3.5	4.4
SSE	.8	3.4	.9	.2								5.3	5.5
S	2.3	4.5	2.2	.5								9.5	5.6
SSW	1.7	4.8	4.1	1.9								12.5	7.0
SW	.3	2.7	2.5	1.5	.2							7.3	8.2
WSW	.7	3.6	1.7	.7	.1							6.9	6.7
W	1.3	3.4	1.1	.1								5.9	5.1
WNW	1.0	1.4	.3	.1								2.8	4.3
NW	1.0	.4										1.4	3.2
NNW	.5	.7	.2		.3							1.7	7.2
VARBL	2.3	1.5										3.8	2.9
CALM												9.4	
	20.2	39.4	22.2	8.1	.7	.1						100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 918

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 60-75 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 1200-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.9	.4	.2								1.9	6.4
NNE	.2	1.1	1.1	.4								2.9	7.2
NE	.5	.9	.4	1.0	.1							3.0	8.5
ENE	.4	1.0	1.0	.1								2.5	6.4
E	1.0	3.0	.8	.4								5.2	5.4
ESE	.5	.7	.2	.1								1.5	5.4
SE	.9	1.4	.7	.1								3.1	5.0
SSE	.9	1.5	.8	.3								3.5	5.8
S	1.8	4.5	3.8	.2	.1							10.4	6.2
SSW	.9	2.7	6.2	3.1	.2							13.2	8.6
SW	1.1	5.5	9.3	3.4								19.3	8.1
WSW	.9	4.1	7.3	2.5	.1							14.8	8.1
W	1.3	2.9	1.3	1.2								6.7	6.4
WNW	.4	.9	.3	.1	.1							1.9	5.9
NW	.4	.5	.1	.1								1.2	5.2
NNW	.3	1.0	.1									1.4	4.9
VARBL	.5	.4										1.0	3.3
CALM												6.5	
	12.5	33.0	36.0	13.4	.7							100.0	6.7

TOTAL NUMBER OF OBSERVATIONS 910

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33368 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 56-75 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 1600-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	1.3	1.0	.3		.1						4.7	5.4
NNE	2.8	6.2	2.2	.7								11.8	5.4
NE	3.0	6.0	1.9	.6	.1							11.5	5.3
ENE	1.2	2.7	.3	.1								4.3	4.6
E	1.4	.8	.3	.1								2.7	4.1
ESE	1.1	.7		.1								1.9	3.7
SE	1.5	.8										2.3	2.3
SSE	.9	.7	.1									1.7	3.7
S	2.7	1.0										3.6	2.5
SSW	3.5	2.2										5.7	3.2
SW	3.9	4.2	.3	.1								8.5	3.6
WSW	3.9	4.0	.4									8.3	3.8
W	1.9	1.4	.3									3.6	3.6
WNW	.4	.6										1.0	3.6
NW	.4	.4										.9	3.3
NNW	.6	.3	.2									1.1	4.3
VARBL	.7	.2										.9	2.5
CALM												25.3	
	31.9	33.4	7.2	2.0	.1	.1						100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 905

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) — INCIRLIK AB TURKEY/ADANA (STATION NAME) — 66-70 (YEARS) — OCT (MONTH)

ALL WEATHER (CLASS) — 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	2.2	.6	.1								4.9	4.2
NNE	4.8	10.0	3.9	.8								19.4	5.3
NE	6.5	22.9	2.8	1.2	.4							33.9	5.1
ENE	4.4	12.0	1.0	.2								17.6	4.5
E	2.3	2.1	.1									4.5	3.3
ESE	1.1	1.1										2.2	3.2
SE	.3	.3										.6	3.0
SSE	.4	.4										.9	3.1
S	.2											.2	3.0
SSW	.1				.1							.2	11.0
SW	.1											.1	2.0
WSW			.1									.1	7.0
W		.1										.1	5.0
WNW	.3	.1	.1									.6	3.8
NW	.3		.1									.4	3.5
NNW	.3	.7										1.0	3.8
VARBL	.6											.6	1.9
CALM												12.7	
	23.9	51.8	8.8	2.3	.6							100.0	4.2

TOTAL NUMBER OF OBSERVATIONS 903

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33305 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.4	4.0	1.3	.4								12.2	4.4
NNE	4.7	11.7	8.6	1.0	.3							26.2	6.1
NE	5.3	17.5	7.5	2.6								32.9	5.9
ENE	1.3	5.4	2.1	1.0	.2							10.0	6.2
E	.7	1.6	.3	.4								3.0	5.6
ESE	.1	.2	.1									.4	5.0
SE				.1								.1	11.0
SSE													
S			.2	.1								.3	8.3
SSW		.1										.1	4.0
SW	.2		.1									.3	4.3
WSW		.1										.1	5.0
W	.3	.2	.3									.9	5.4
WNW	.2		.1									.3	4.7
NW	.8	.3		.1								1.2	3.9
NNW	1.6	1.6	.2		.1							3.6	4.1
VARBL													
CALM												10.3	
	19.6	42.8	20.8	5.7	.7							100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 922

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK Ab TURKEY/ADANA (STATION NAME) 60-7[illegible] (YEARS) [illegible] (MONTH)

ALL WEATHER (CLASS) 0300-0900 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.5	6.4	1.1		.1							11.0	4.3
NNE	5.2	9.9	11.8	1.4	.1							[illegible].4	5.1
NE	5.6	12.7	7.4	2.4	.4							[illegible].4	5.1
ENE	2.2	3.3	2.0	1.1								8.6	5.2
E	1.0	.5	.2	.2								2.2	4.4
ESE		.1	.1									.2	7.5
SE													
SSE	.2											.2	2.0
S	.1	.1										.2	4.0
SSW	.1	.2	.2									.5	6.4
SW													
WSW	.2											.2	2.0
W	.5	.3		.1								1.0	4.3
WNW	.1	.4										.5	4.4
NW	1.4	.4	.2									2.0	3.4
NNW	2.8	1.7		.1								4.6	3.5
VARBL													
CALM												11.9	
	22.5	38.5	27.3	5.3	.4							100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 927

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

3330P — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
66-7[illegible] — YEARS
[illegible] — MONTH

ALL WEATHER — CLASS
0600-0900 — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.4	4.9	1.3	.3								10.9	4.4
NNE	4.5	10.7	10.6	.7	.2							26.6	[illegible]
NE	4.4	10.8	7.8	2.3	.1							25.4	6.4
ENE	1.4	2.2	1.6	1.4		.1						6.8	7.1
E	1.3	.7	1.0	.3		.1						3.4	6.3
ESE	.2	.5										.8	3.9
SE	.1	.2										.3	4.3
SSE	.2	.3										.5	3.8
S	.2	.2	.1									.5	4.4
SSW	.3											.3	2.3
SW	.1	.1										.2	3.5
WSW	.1											.1	2.0
W	.4		.1									.5	3.2
WNW	.9	.2	.1									1.2	3.2
NW	.7	.8	.2									1.6	4.2
NNW	2.8	2.7	.2									5.8	3.7
VARBL													
CALM												15.0	
	22.0	36.3	23.1	5.0	.3	.3						100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 918

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33306 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0700-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	2.8	1.9	.2	.1	.1						7.2	5.3
NNE	2.3	5.1	5.3	1.2	.2	.1	.1					16.9	7.1
NE	2.0	6.7	7.0	5.7	1.4	.2						23.0	7.8
ENE	1.8	4.6	4.7	4.3	.8	.2						16.4	7.8
E	2.2	2.1	1.4	1.1	.1							6.7	5.1
ESE	1.5	.2	.1									1.9	2.9
SE	.7	1.0	.3	.1								2.1	4.3
SSE	.6	.7										1.4	3.3
S	1.2	.3	.2	.2								2.0	4.8
SSW	.4	.8	.3									1.5	4.3
SW	.2	.1		.1								.4	6.3
WSW	.9	.1										1.0	2.3
W	1.4	.4	.2	.1								2.2	3.8
WNW	.5	.9										1.4	3.2
NW	.7	.9	.1	.1								1.8	4.7
NNW	1.2	.4	.1	.1								1.9	3.7
VARBL													
CALM												12.9	
	20.4	27.2	22.1	13.9	2.0	.4	.1					100.0	6.2

TOTAL NUMBER OF OBSERVATIONS 913

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33304 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
66-74 — YEARS
V — MONTH
ALL WEATHER — CLASS
1201-1500 — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	2.9	1.5	.4								5.8	5.7
NNE	1.5	2.9	2.1	1.2	.2	.1						8.1	7.4
NE	1.3	3.5	4.5	1.4	.2	.2						11.2	7.7
ENE	2.5	3.1	4.2	1.9	.3							12.0	7.4
E	3.0	5.4	2.2	.4	.1	.1						11.3	5.6
ESE	1.8	1.8	.7									4.3	4.1
SE	.4	1.1	.1									2.1	3.3
SSE	1.0	1.7	.3									3.0	3.8
S	2.7	1.7	.9	.4	.1							5.3	5.1
SSW	1.0	1.7	1.0	.3								4.0	6.2
SW	1.2	1.0	.2	.1	.1							2.7	4.9
WSW	1.2	1.8	.3	.1	.1							3.5	5.3
W	1.0	2.0	.4	.1								4.7	4.5
WNW	1.0	.8	.2									2.0	3.6
NW	.4	.7	.4	.2	.1							1.9	7.1
NNW	.4	.4	.6	.9	.1	.1						2.5	7.3
VARBL	.1											.1	3.0
CALM												13.7	
	23.4	33.1	24.3	7.4	1.5	.2						100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 890

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33303 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) --67 (YEARS) V (MONTH)

ALL AC-TYPE (CLASS) 12?-1?? (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	2.5	.9	.4	.1							[illegible]	[illegible]
NNE	1.1	1.2	2.4	.7	.2							[illegible]	7.2
NE	.5	3.1	2.3	1.1	.2	.1						[illegible]	7.3
ENE	1.2	2.9	1.7	1.4	.4							7.6	7.4
E	1.9	2.5	1.0	.1								5.5	[illegible]
ESE	1.1	1.4	.4									3.0	[illegible]
SE	1.3	2.1	.3	.2								4.0	4.0
SSE	2.4	2.2	.4	.1								5.2	[illegible]
S	4.3	2.1	1.1	.3								7.8	[illegible]
SSW	1.2	2.5	1.4	.8								6.0	[illegible]
SW	1.9	2.8	1.6	.8								7.1	[illegible]
WSW	2.1	3.1	.6	.2								6.2	4.7
W	1.8	2.7	.3									4.8	4.4
WNW	.6	.6	.2	.1								1.3	5.3
NW	1.2	.3	.4		.1							2.2	4.7
NNW	1.0	1.2	.3	.2		.1						3.0	5.7
VARBL													
CALM												18.7	
	25.2	36.3	16.6	6.7	1.1	.2						100.0	4.7

TOTAL NUMBER OF OBSERVATIONS 2442

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

3

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

333[illegible] (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) [illegible] (YEARS) [illegible] (MONTH)

[illegible] (CLASS) 1[illegible]-2[illegible] (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	2.9	1.4	.4	.3							6.7	6.2
NNE	2.7	10.4	4.0	1.3	.1							18.2	5.1
NE	5.4	18.0	3.3	.3	.3							27.3	5.2
ENE	2.7	5.6	1.9	.8	.1							10.9	5.9
E	2.9	1.9	.3	.7								4.9	5.1
ESE	.3	.6		.1								1.3	4.3
SE	.7	.2										.9	3.0
SSE	.6	.3										.9	3.1
S	1.3	.7										1.9	3.3
SSW	.6	.3	.1									1.0	4.2
SW	1.0	.8										1.8	3.2
WSW	.7	.6										1.2	3.4
W	.7	1.1										1.8	3.4
WNW	1.3	.8										2.1	2.7
NW	.5	.6										1.3	3.4
NNW	.6	.4	.2	.2								1.4	5.3
VARBL													
CALM												14.7	
	23.1	44.9	12.0	4.4	.9							100.0	4.4

TOTAL NUMBER OF OBSERVATIONS 905

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33366 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 60-[illegible] (YEARS) [illegible] (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	3.2	.7	.5		.1						6.5	5.5
NNE	2.7	15.0	7.3	1.6	.2							25.8	8.2
NE	5.2	22.8	7.1	2.1	.1							37.3	5.7
ENE	1.3	8.7	2.7	1.3	.1							14.1	6.3
E	1.2	1.3	.3	.2								3.0	4.4
ESE	.3	.4										.9	4.0
SE	.2		.1	.1								.4	5.5
SSE		.2	.1									.3	6.1
S	.3	.3	.1	.1	.1							1.0	5.7
SSW	.1											.1	2.5
SW			.1	.1								.2	12.0
WSW		.1										.1	4.0
W	.1											.1	3.3
WNW	.5	.2	.2									1.0	3.9
NW	.3											.3	2.3
NNW	.9	.4	.3		.1							1.7	5.1
VARBL													
CALM												6.3	
	15.2	52.7	19.0	6.1	.7	.1						100.0	5.5

TOTAL NUMBER OF OBSERVATIONS 920

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33306 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 66-75 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS) | 0006-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.2	4.4	2.3									10.9	4.5
NNE	3.4	14.7	9.0	1.1								28.2	5.0
NE	3.2	14.3	4.3	5.1	.6							27.7	7.4
ENE	1.6	4.2	2.6	2.5	.5	.1						11.5	7.9
E	.6	1.0	.1	.1								1.8	4.4
ESE	.1											.1	3.2
SE													
SSE		.1	.1	.1								.3	3.0
S		.1				.2						.3	11.3
SSW	.1	.2	.1	.1	.1							.7	8.8
SW			.1									.1	10.1
WSW	.1	.1										.2	3.1
W	.1		.1									.2	5.0
WNW	.1	.1		.1								.3	6.0
NW	.5	.3		.1	.1							1.0	6.4
NNW	.8	1.2	.5	.1	.1							2.7	5.5
VARBL													
CALM												8.7	
	14.8	40.9	24.2	9.4	1.8	.4						100.0	6.0

TOTAL NUMBER OF OBSERVATIONS 880

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33366 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 60-75 YEARS | DEC MONTH

ALL WEATHER CLASS | 0400-0500 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.1	4.8	1.8	.4	.1							11.1	6.7
NNE	4.0	11.6	7.2	2.5	.1		.1					25.3	6.6
NE	4.1	11.3	6.9	3.7	.6							26.5	7.3
ENE	1.1	4.2	3.3	3.1	.3	.1						12.2	8.3
E	.3	1.0	.7	.3								2.4	6.7
ESE	.1											.1	2.3
SE	.1	.2										.3	3.3
SSE	.1		.1	.1								.3	3.3
S	.1		.1									.2	5.0
SSW	.2				.1	.1						.5	12.0
SW		.1			.1							.2	12.0
WSW	.5	.1										.6	2.8
W	.3		.1									.6	3.0
WNW	.6	.5	.1									1.1	4.3
NW	.1	.7	.1	.1	.1							1.1	6.5
NNW	1.8	.9	.1	.1	.1							3.1	3.9
VARBL													
CALM												11.3	
	17.8	35.5	23.3	10.2	1.6	.2	.1					140.0	5.8

TOTAL NUMBER OF OBSERVATIONS 876

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) .12 (MONTH)

ALL WEATHER (CLASS) 0600-0900 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	5.4	4.7	1.2	.4								11.6	4.1
NNE	3.2	11.3	8.3	1.6								24.4	6.3
NE	3.0	11.1	9.4	5.3	1.3							30.1	8.0
ENE	1.3	1.4	2.2	1.9	.6							7.4	6.7
E	1.1	.7	.7	.5								2.9	5.3
ESE	.2	.4		.1	.1							.8	6.6
SE			.1									.1	7.0
SSE	.1											.1	2.0
S	.5											.5	2.3
SSW	.1		.1	.1								.4	7.0
SW			.1		.1							.2	13.5
WSW	.2	.2										.5	3.5
W	.4	.1		.1								.6	4.6
WNW	.6	.4	.1									1.1	3.8
NW	1.9	.7										2.6	3.0
NNW	2.2	1.9	.5	.1								4.7	4.1
VARBL													
CALM												12.1	
	20.2	32.8	22.7	10.1	2.1							100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 853

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.4	2.4	1.8	.6		.1						8.0	2.5
NNE	2.8	6.0	6.3	2.2	.7	.1	.1					18.3	7.6
NE	2.6	7.9	14.2	7.2	2.4	.1						34.0	9.1
ENE	1.3	3.9	5.1	4.6	1.2							16.1	9.3
E	1.2	2.5	1.2	.8								5.7	6.9
ESE	.5	.5										.9	3.3
SE	.4	.1										.5	2.5
SSE	.2			.1								.4	6.7
S	.4											.4	1.7
SSW	.2	.1										.4	2.7
SW		.1										.1	4.5
WSW		.1										.1	4.0
W	.4	.5										.8	3.6
WNW	.5	.7			.1							1.3	5.1
NW	.5	.5	.2									1.2	4.6
NNW	.7	1.4	.1									2.2	4.5
VARBL													
CALM												9.6	
	14.8	26.7	28.8	15.6	4.0	.4	.1					100.0	7.1

TOTAL NUMBER OF OBSERVATIONS 846

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

3

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) — INCIRLIK AB TURKEY/ADANA (STATION NAME) — 60-75 (YEARS) — JUL (MONTH)

ALL AT THESE (CLASS) — 1200-1400 HOURS (L.S.T.)

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.5	1.5	.4	.2							4.3	7.3
NNE	.7	2.4	2.8	2.2	.5	.0						9.2	9.3
NE	1.2	4.4	6.1	5.8	1.2	.1						18.8	9.5
ENE	2.2	4.9	6.1	3.8	.8	.1						18.2	8.4
E	2.9	4.3	2.3	1.0	.2							10.8	5.1
ESE	1.7	1.0	.1	.2	.1							3.8	4.6
SE	.9	1.4		.1								2.4	4.1
SSE	.7	.6	.3									1.6	4.1
S	1.2	.8	.2	.2	.1							2.6	5.3
SSW	.7	.5	.2									1.4	4.2
SW	.8	.2	.1									1.2	3.2
WSW	.7	.6	.1									1.4	3.8
W	1.6	1.3	.2	.1								3.3	3.9
WNW	.6	1.0	.3									2.0	4.7
NW	.7	.6	.2	.1								1.6	5.0
NNW	.7	.6	.7	.1		.1						2.2	6.2
VARBL													
CALM												15.2	
	18.1	26.8	21.4	14.2	3.1	1.2						100.0	6.3

TOTAL NUMBER OF OBSERVATIONS 858

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) 10 (MONTH)

ALL WEATHER (CLASS) 1200-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	1.0	1.2	.7	.3	.1	.1					4.7	8.7
NNE	1.5	3.6	2.3	.5	.1	.2						9.1	6.3
NE	2.7	3.8	5.0	5.2	.3	.1						17.2	8.3
ENE	2.7	4.6	4.3	2.1	.3							14.2	7.1
E	2.2	4.9	2.2	.7								10.0	5.5
ESE	1.7	1.5	.2									3.8	3.8
SE	.7	.5	.1									1.7	3.6
SSE	.8	.7	.3									1.9	3.4
S	1.7	.8										2.6	3.1
SSW	1.0	1.5		.1	.1							2.8	4.6
SW	1.7	1.5	.6									3.8	4.0
WSW	2.0	1.4	.1		.1							4.2	3.7
W	1.6	1.7	.2									3.6	3.7
WNW	.5	.5	.2									1.2	4.6
NW	.3	.3	.1	.2								1.0	5.7
NNW	.2	.7	.5	.1	.1	.1						1.7	8.0
VARBL													
CALM												15.3	
	23.7	30.2	17.5	10.1	1.5	.6	.1					100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 852

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.5	3.0	1.5	.6								7.6	5.3
NNE	5.6	13.0	4.3	1.4	.3							24.5	5.7
NE	4.5	21.6	6.0	3.6	.2							36.1	5.7
ENE	1.9	5.4	3.6	4.3		.1						15.3	7.8
E	.6	1.0	.9	.5	.1							3.1	7.3
ESE	.1	.3	.1									.6	4.8
SE		.1										.1	4.0
SSE	.1	.3	.3									.8	6.1
S		.2			.4							.6	12.8
SSW													
SW	.3	.1	.3	.1								.9	6.0
WSW	.2											.2	2.0
W	.2			.1								.3	5.3
WNW	.1	.1		.1								.3	7.3
NW	.1	.3	.1									.6	5.0
NNW	.9	1.0	.2									2.2	3.9
VARBL													
CALM												6.6	
	17.2	46.8	17.5	10.8	1.2	.1						100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 864

USAFETAC FORM AWS 04 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33356 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	3.0	1.7	.4								6.8	5.3
NNE	2.0	16.0	6.9	1.8								27.4	6.1
NE	4.1	17.8	9.9	4.9	.3	.2						37.2	6.9
ENE	2.1	5.3	3.3	3.2	.1							14.0	7.4
E	1.0	.8	.9	.2								2.9	5.9
ESE	.1	.2	.1									.5	5.0
SE		.1										.1	4.0
SSE					.1							.1	20.0
S		.1			.2	.1						.5	16.8
SSW	.3											.3	2.7
SW													
WSW	.2											.2	2.5
W			.2									.2	7.5
WNW	.1											.1	2.0
NW	.3	.3		.1								.8	4.6
NNW	.7	1.1										1.8	4.9
VARBL													
CALM												7.0	
	13.5	44.8	23.0	10.5	.8	.3						100.0	6.1

TOTAL NUMBER OF OBSERVATIONS 873

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

33308 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 56-60,72-76 (YEARS) | ALL (MONTH)

INSTRUMENT (CLASS) | ALL (HOURS (L.S.T.))

CIG 200 TO 1400 FT W/ VSBY 1/2 MI OR MORE, AND/OR VSBY 1/2 TO 2-1/2 MI W/CIG 200 FT OR MORE (CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.8	1.7	.4								4.1	7.1
NNE	6.4	3.3	2.1	.4	1.7	.4						14.5	9.7
NE	5.8	5.0	2.1	2.1	.4			.4				15.7	6.9
ENE	2.5	2.5	.8	.4	.4							6.5	5.9
E	1.7	3.3	2.5	.4								7.9	7.1
ESE	.4	.8		.4								1.7	5.5
SE	1.7	.4		.4	.4							2.9	6.3
SSE	.8		.4	.4								1.7	7.0
S	.4	1.7	1.2	1.7	.4							5.4	8.5
SSW	.4			.4		.4						1.2	13.3
SW	.4		.4	.8								1.7	7.5
WSW			1.2									1.2	9.3
W	.4	.8	.8	.4								2.5	6.7
WNW	1.2	.4	.4									2.1	4.0
NW	.4		.4									.8	6.0
NNW	.4	.4	.4		.4							1.7	7.5
VARBL	1.2	.8										2.1	2.0
CALM												26.4	
	24.8	20.2	14.5	9.1	3.7	.8		.4				100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 242

USAFETAC FORM AM 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART D CEILING VERSUS VISIBILITY

This summary is a bivariate percentage frequency distribution by classes of ceiling from zero to equal to or greater than 20,000 feet and as a separate class "no ceiling", versus visibility in 16 classes from zero to equal to or greater than 10 miles. Data are derived from hourly observations, and three sets of tables are presented as follows:

1. Annual - all years and all hours combined
2. By month - all years and all hours combined
3. By month - by standard 3-hour groups

Due to the cumulative nature of this presentation, it is possible to determine the percentage frequency of occurrence for any given limit of ceiling or visibility separately, or in combination of ceiling and visibility. The totals progress to the right and downward. Ceiling may be determined independently by referring to totals in the extreme right hand column. Also, visibility may be determined independently by reference to the horizontal row of totals at the bottom of the page. The percentage frequency for which the station was meeting or exceeding any given set of minima may be determined from the figure at the intersection of the appropriate ceiling column and visibility row. Several examples in the use of these tables are shown on pages 2 and 3 below.

U. S. Weather Bureau and Navy stations did not report ceilings within the range 10,000 feet and higher prior to January 1949. Summaries prepared from data for these stations using the earlier period and data subsequent to January 1949 will be modified to limit ceilings to 10,000 feet. Short periods of record prior to 1949 for these stations will be eliminated from the summary. For Air Force stations, the "no ceiling" category includes clear and scattered conditions, and ceilings above 20,000 feet for period through June 1948. Beginning in July 1948 for Air Force stations and January 1949 for USWB and U. S. Navy stations the "no ceiling" category consists of observations with less than 6/10 total sky cover and those cases where total sky cover is 6/10 or more, but not more than 1/2 of the sky cover is opaque.

Beginning in January 1968, METAR stations report visibilities to 6 miles and then greater than 6 miles. Thus, for METAR stations, the category equal to or greater than 10 miles is not printed in the tables, unless the summary was for a period ending before January 1968.

Continued on Reverse Side

EXAMPLES FOR USE OF CEILING VERSUS VISIBILITY TABLES IN THIS TABULATION

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥ 10	≥ 6	≥ 5	≥ 4	≥ 3	≥ 2½	≥ 2	≥ 1½	≥ 1¼	≥ 1	≥ ¾	≥ ⅝	≥ ½	≥ 5/16	≥ ¼	≥ 0
NO CEILING																
≥ 1800 ≥ 1500					91.0											92.6
≥ 1200 ≥ 1000																
≥ 900 ≥ 800																
≥ 700 ≥ 600																
≥ 500 ≥ 400										97.4						98.1
≥ 300 ≥ 200																
≥ 100 ≥ 0					95.4		96.9			98.3						100.0

EXAMPLE # 1 Read ceiling values independently of visibility under column at right headed ≥ 0. For instance, from the table: Ceiling ≥ 1500 feet = 92.6%. Ceiling ≥ 500 feet = 98.1%.

EXAMPLE # 2 Read visibilities independently of ceilings on bottom line opposite ≥ 0. From the table:
Visibility ≥ 3 miles = 95.4%.
Visibility ≥ 2 miles = 96.9%.
Visibility ≥ 1 mile = 98.3%.

EXAMPLE # 3 To obtain combinations of ceiling with visibility, read figure at intersection of the two categories; i.e.: Ceiling ≥ 1500 feet with visibility ≥ 3 miles = 91.0%.

874-28983

ADDITIONAL EXAMPLES

EXAMPLE # 4 Values below minimums stated in the table may be obtained by subtracting the value given in the table from 100%.
Thus, to obtain the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles, subtract the value read from the table at the intersection, which is 91.0, from 100.0. The answer 9.0 is the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles.

Likewise, the percentage of observations with ceiling < 500 feet and/or visibility < 1 mile is 2.6, obtained by subtracting 97.4 from 100.0.

EXAMPLE # 5 To find the percentage of observations falling within the two categories given in example above, subtract the value read from the table for the first set of limits from the value in the table for the second set of limits. The difference will be the percentage of observations meeting the lower set of limits, but not meeting the higher set of limits.

The value 91.0 read from the table at the intersection of $\geq$ 1500 feet with $\geq$ 3 miles, subtracted from 97.4 read from the table at the intersection of $\geq$ 500 feet with $\geq$ 1 mile is equal to 6.4%. Thus; 6.4 percent of the observations meet the criteria: "ceiling $\geq$ 500 feet with visibility $\geq$ 1 mile, but < 3 miles; or ceiling $\geq$ 500 feet, but < 1500 feet with visibility $\geq$ 1 mile."

Since these tabulations are prepared in several ways including by month, by 3-hour groups it is possible to determine diurnal variations of ceiling and visibility limits as well as probabilities of various ceiling-visibility combinations.

874-33864

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33305 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 60-76 (YEARS) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING FEET	VISIBILITY - STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	0
NO CEILING		82.1	82.6	82.9	83.2	83.3	83.3	83.3	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4
≥ 20000		85.7	86.4	86.5	86.6	86.9	86.9	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.1
≥ 18000		85.7	86.5	86.5	86.7	86.9	86.9	87.0	87.0	87.0	87.0	87.1	87.1	87.1	87.1	87.1
≥ 16000		85.7	86.5	86.6	86.8	86.9	86.9	87.0	87.0	87.0	87.0	87.1	87.1	87.1	87.1	87.1
≥ 14000		85.8	86.6	86.7	87.0	87.1	87.1	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.3
≥ 12000		86.4	87.2	87.2	87.6	87.6	87.7	87.7	87.7	87.7	87.8	87.8	87.8	87.8	87.8	87.9
≥ 10000		89.2	89.9	90.1	90.4	90.4	90.4	90.5	90.5	90.5	90.6	90.6	90.6	90.6	90.6	90.6
≥ 9000		90.3	91.0	91.1	91.5	91.5	91.5	91.6	91.6	91.6	91.6	91.7	91.7	91.7	91.7	91.7
≥ 8000		91.4	92.0	92.2	93.1	93.2	93.2	93.2	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.4
≥ 7000		93.0	93.6	93.9	94.3	94.4	94.4	94.4	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.6
≥ 6000		93.6	94.5	94.6	95.0	95.1	95.1	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.3
≥ 5000		94.2	95.1	95.2	95.6	95.7	95.7	95.8	95.8	95.8	95.8	95.9	95.9	95.9	95.9	95.9
≥ 4500		94.5	95.4	95.6	96.0	96.0	96.1	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.3
≥ 4000		95.2	96.1	96.3	96.7	96.8	96.8	96.9	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0
≥ 3500		95.8	96.7	96.8	97.3	97.3	97.4	97.4	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 3000		96.6	97.6	98.0	98.4	98.5	98.5	98.6	98.6	98.7	98.7	98.7	98.7	98.7	98.7	98.8
≥ 2500		97.1	98.1	98.3	98.8	98.8	98.9	98.9	99.0	99.0	99.0	99.0	99.1	99.1	99.1	99.1
≥ 2000		97.5	98.4	98.6	99.1	99.2	99.2	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.5
≥ 1800		97.5	98.5	98.7	99.2	99.3	99.3	99.4	99.4	99.5	99.5	99.5	99.5	99.5	99.5	99.6
≥ 1500		97.7	98.7	98.9	99.4	99.5	99.5	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.8
≥ 1200		97.8	98.8	99.0	99.5	99.6	99.6	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.9
≥ 1000		97.8	98.8	99.0	99.5	99.6	99.7	99.7	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 900		97.8	98.8	99.1	99.6	99.6	99.7	99.8	99.8	99.8	99.8	99.9	99.9	99.9	99.9	99.9
≥ 800		97.9	98.9	99.1	99.6	99.6	99.7	99.9	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 700		97.9	98.9	99.1	99.6	99.6	99.7	99.8	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 600		97.9	98.9	99.1	99.6	99.6	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	99.9	100.0
≥ 500		97.9	98.9	99.1	99.6	99.6	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 400		97.9	98.9	99.1	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 300		97.9	98.9	99.1	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 200		97.9	98.9	99.1	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 100		97.9	98.9	99.1	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
0		97.9	98.9	99.1	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 47331

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

LL (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	0
NO CEILING		68.1	68.1	68.1	68.1	68.1	68.1	68.2	68.2	68.2	68.2	68.2	68.2	68.2	68.2	68.2
≥ 20000		72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.3	72.3	72.3	72.3	72.3
≥ 18000		72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 16000		72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 14000		72.6	72.6	72.6	72.6	72.6	72.6	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7
≥ 12000		73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.2	73.2	73.2	73.2	73.2
≥ 10000		78.9	78.9	78.9	78.9	78.9	78.9	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.1
≥ 9000		80.7	80.7	80.7	80.7	80.7	80.7	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 8000		83.4	83.4	83.5	83.5	83.5	83.5	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 7000		87.0	87.0	87.0	87.0	87.0	87.1	87.1	87.1	87.1	87.1	87.1	87.2	87.2	87.2	87.2
≥ 6000		89.0	89.0	89.0	89.0	89.0	89.1	89.1	89.1	89.1	89.1	89.1	89.2	89.2	89.2	89.2
≥ 5000		90.3	90.4	90.5	90.5	90.5	90.6	90.6	90.6	90.6	90.6	90.6	90.7	90.7	90.7	90.7
≥ 4500		91.5	91.6	91.7	91.8	91.8	91.9	91.9	91.9	91.9	91.9	91.9	92.0	92.0	92.0	92.0
≥ 4000		92.6	92.9	93.0	93.1	93.1	93.3	93.3	93.3	93.3	93.3	93.4	93.4	93.4	93.4	93.4
≥ 3500		94.0	94.4	94.5	94.6	94.6	94.8	94.9	94.9	94.9	95.0	95.0	95.0	95.0	95.0	95.0
≥ 3000		96.4	96.8	97.0	97.1	97.1	97.3	97.3	97.3	97.4	97.4	97.5	97.5	97.5	97.5	97.5
≥ 2500		97.1	97.5	97.8	97.9	97.9	98.1	98.2	98.2	98.3	98.3	98.4	98.4	98.4	98.4	98.4
≥ 2000		97.7	98.3	98.6	98.7	98.7	99.0	99.1	99.1	99.2	99.2	99.3	99.3	99.3	99.3	99.3
≥ 1800		97.8	98.3	98.6	98.8	98.8	99.1	99.2	99.2	99.2	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1500		98.1	98.6	99.0	99.1	99.1	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7	99.7
≥ 1200		98.2	98.7	99.1	99.3	99.3	99.6	99.7	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9
≥ 1000		98.3	98.8	99.1	99.3	99.3	99.7	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 900		98.3	98.8	99.1	99.3	99.3	99.7	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 800		98.3	98.8	99.1	99.3	99.3	99.7	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 700		98.3	98.8	99.1	99.3	99.3	99.7	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 600		98.3	98.8	99.1	99.3	99.3	99.7	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 500		98.3	98.8	99.2	99.3	99.3	99.7	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 400		98.3	98.8	99.2	99.3	99.3	99.7	99.8	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 300		98.3	98.8	99.2	99.3	99.3	99.7	99.8	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 200		98.3	98.8	99.2	99.3	99.3	99.7	99.8	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 100		98.3	98.8	99.2	99.3	99.3	99.7	99.8	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0
0		98.3	98.8	99.2	99.3	99.3	99.7	99.8	99.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 3334

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33346 STATION | I. CIRLIK AB TURKEY/ADANA STATION NAME | 7-70 YEARS | 11 MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

LL HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	
NO CEILING		71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 20000		77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3
≥ 18000		77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 16000		77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
≥ 14000		77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 12000		78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 10000		82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 9000		84.9	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0
≥ 8000		88.5	88.6	88.6	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 7000		91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 6000		92.0	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 5000		93.3	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 4500		94.4	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 4000		95.2	95.6	95.6	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 3500		96.0	96.5	96.5	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 3000		97.4	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 2500		97.9	98.4	98.4	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 2000		98.3	98.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1800		98.5	99.1	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1500		98.6	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 1200		98.9	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1000		99.0	99.6	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.2	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 3086

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333UB (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		68.7	69.2	69.2	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.7	69.7	69.7	69.7	69.7
≥ 20000		75.1	75.4	75.4	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.9	75.9	75.9	75.9	75.9
≥ 18000		75.2	75.5	75.5	75.9	75.9	75.9	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.1	76.1
≥ 16000		75.2	75.5	75.5	75.9	75.9	75.9	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.1	76.1
≥ 14000		75.4	75.7	75.7	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.2	76.2	76.2	76.2	76.4
≥ 12000		76.0	76.3	76.3	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.8	76.8	76.8	76.8	76.9
≥ 10000		81.3	81.6	81.6	82.0	82.0	82.0	82.0	82.1	82.1	82.1	82.1	82.1	82.2	82.2	82.2
≥ 9000		83.5	83.9	83.9	84.3	84.3	84.4	84.4	84.4	84.5	84.5	84.5	84.5	84.5	84.5	84.6
≥ 8000		86.8	87.2	87.2	87.7	87.7	87.7	87.7	87.8	87.8	87.8	87.9	87.9	87.9	87.9	88.0
≥ 7000		89.1	89.5	89.5	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.2	90.2	90.2	90.2	90.3
≥ 6000		90.1	90.6	90.6	91.0	91.0	91.1	91.1	91.2	91.2	91.2	91.3	91.3	91.3	91.3	91.4
≥ 5000		91.3	91.9	91.9	92.4	92.4	92.5	92.5	92.5	92.6	92.6	92.7	92.7	92.7	92.7	92.8
≥ 4500		92.1	92.6	92.6	93.1	93.1	93.2	93.2	93.3	93.3	93.3	93.4	93.4	93.4	93.4	93.5
≥ 4000		92.9	93.5	93.5	94.0	94.0	94.1	94.1	94.1	94.2	94.2	94.3	94.3	94.3	94.3	94.4
≥ 3500		94.0	94.6	94.7	95.2	95.2	95.3	95.3	95.4	95.4	95.4	95.5	95.5	95.5	95.5	95.6
≥ 3000		95.9	96.5	96.6	97.1	97.2	97.3	97.3	97.3	97.4	97.4	97.5	97.5	97.5	97.5	97.6
≥ 2500		97.0	97.6	97.8	98.3	98.3	98.5	98.5	98.5	98.6	98.6	98.7	98.7	98.7	98.7	98.8
≥ 2000		97.8	98.5	98.7	99.3	99.3	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.7	99.7	99.7
≥ 1800		97.9	98.6	98.7	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7	99.8
≥ 1500		97.9	98.6	98.8	99.4	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.9
≥ 1200		97.9	98.6	98.8	99.5	99.5	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 1000		97.9	98.6	98.8	99.5	99.5	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 900		97.9	98.6	98.8	99.5	99.5	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9
≥ 800		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 700		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 600		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 500		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 400		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 300		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 200		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 100		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 0		97.9	98.7	98.8	99.6	99.6	99.7	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 3558

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		76.4	77.0	77.0	77.3	77.3	77.3	77.3	77.4	77.4	77.4	77.4	77.4	77.5	77.5	77.7
≥ 20000		84.7	85.3	85.3	85.6	85.6	85.6	85.6	85.7	85.7	85.7	85.7	85.7	85.8	85.8	86.0
≥ 18000		84.7	85.3	85.3	85.6	85.6	85.6	85.6	85.7	85.7	85.7	85.7	85.7	85.8	85.8	86.0
≥ 16000		84.7	85.3	85.4	85.6	85.6	85.6	85.7	85.7	85.7	85.7	85.7	85.7	85.8	85.8	86.0
≥ 14000		85.0	85.6	85.7	85.9	85.9	85.9	86.0	86.0	86.0	86.0	86.0	86.0	86.1	86.1	86.3
≥ 12000		86.7	87.3	87.3	87.6	87.6	87.6	87.7	87.7	87.7	87.7	87.7	87.7	87.8	87.8	88.1
≥ 10000		89.9	90.5	90.5	90.8	90.8	90.8	90.9	90.9	90.9	90.9	90.9	90.9	91.0	91.0	91.3
≥ 9000		91.2	91.8	91.8	92.1	92.1	92.1	92.1	92.2	92.2	92.2	92.2	92.2	92.3	92.3	92.5
≥ 8000		92.6	93.2	93.2	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.6	93.7	93.7	93.9
≥ 7000		93.4	94.0	94.0	94.3	94.3	94.3	94.4	94.4	94.4	94.4	94.4	94.4	94.5	94.5	94.7
≥ 6000		94.1	94.7	94.8	95.1	95.1	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.3	95.3	95.6
≥ 5000		94.3	95.0	95.1	95.4	95.4	95.4	95.5	95.5	95.5	95.5	95.5	95.6	95.6	95.6	95.9
≥ 4500		94.5	95.1	95.3	95.6	95.6	95.6	95.7	95.7	95.7	95.7	95.7	95.7	95.8	95.8	96.1
≥ 4000		95.5	96.1	96.2	96.5	96.5	96.6	96.6	96.7	96.7	96.7	96.7	96.7	96.8	96.8	97.0
≥ 3500		95.8	96.4	96.5	96.8	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.1	97.1	97.3
≥ 3000		97.0	97.7	97.8	98.1	98.1	98.2	98.2	98.3	98.3	98.3	98.3	98.3	98.4	98.4	98.6
≥ 2500		97.3	97.9	98.1	98.4	98.4	98.5	98.5	98.6	98.6	98.6	98.6	98.6	98.7	98.7	98.9
≥ 2000		97.6	98.3	98.5	98.9	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.1	99.2	99.2	99.4
≥ 1800		97.7	98.4	98.6	98.9	98.9	99.0	99.1	99.1	99.2	99.2	99.2	99.2	99.3	99.3	99.5
≥ 1500		97.9	98.6	98.7	99.1	99.1	99.2	99.2	99.3	99.3	99.3	99.3	99.3	99.4	99.4	99.7
≥ 1200		98.0	98.8	98.9	99.3	99.3	99.4	99.4	99.5	99.5	99.5	99.5	99.6	99.7	99.7	99.9
≥ 1000		98.1	98.8	99.0	99.4	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.7	99.7	99.9
≥ 900		98.1	98.8	99.0	99.4	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.7	99.7	99.9
≥ 800		98.1	98.8	99.0	99.4	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.7	99.7	99.9
≥ 700		98.1	98.8	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	100.0
≥ 600		98.1	98.8	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	100.0
≥ 500		98.1	98.8	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	100.0
≥ 400		98.1	98.8	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	100.0
≥ 300		98.1	98.8	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	100.0
≥ 200		98.1	98.8	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	100.0
≥ 100		98.1	98.8	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	100.0
≥ 0		98.1	98.9	99.0	99.4	99.4	99.5	99.5	99.6	99.6	99.6	99.6	99.7	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 3332

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		80.2	80.6	80.7	81.1	81.1	81.1	81.3	81.3	81.4	81.4	81.4	81.4	81.5	81.5	81.6
≥ 20000		87.5	87.9	88.0	88.3	88.4	88.4	88.5	88.6	88.6	88.6	88.7	88.7	88.7	88.7	88.8
≥ 18000		87.5	87.9	88.0	88.3	88.4	88.4	88.5	88.6	88.6	88.6	88.7	88.7	88.7	88.7	88.8
≥ 16000		87.5	87.9	88.0	88.3	88.4	88.4	88.5	88.6	88.6	88.6	88.7	88.7	88.7	88.7	88.8
≥ 14000		87.6	88.0	88.1	88.5	88.5	88.5	88.6	88.7	88.7	88.7	88.8	88.8	88.8	88.8	88.9
≥ 12000		88.1	88.5	88.6	89.0	89.1	89.1	89.2	89.3	89.3	89.3	89.4	89.4	89.4	89.4	89.5
≥ 10000		91.6	92.0	92.1	92.5	92.5	92.5	92.7	92.7	92.8	92.8	92.8	92.8	92.9	92.9	93.0
≥ 9000		93.1	93.5	93.6	94.1	94.1	94.1	94.2	94.3	94.3	94.3	94.4	94.4	94.4	94.4	94.5
≥ 8000		93.9	94.4	94.5	94.9	94.9	94.9	95.1	95.1	95.2	95.2	95.3	95.3	95.3	95.3	95.4
≥ 7000		94.4	94.8	94.9	95.4	95.4	95.4	95.5	95.6	95.6	95.6	95.7	95.7	95.7	95.7	95.8
≥ 6000		94.7	95.1	95.3	95.7	95.7	95.7	95.9	95.9	95.9	95.9	96.0	96.0	96.0	96.0	96.1
≥ 5000		95.0	95.5	95.6	96.0	96.0	96.0	96.2	96.2	96.3	96.3	96.3	96.3	96.4	96.4	96.5
≥ 4500		95.2	95.6	95.8	96.2	96.2	96.2	96.3	96.4	96.4	96.4	96.5	96.5	96.5	96.5	96.6
≥ 4000		95.9	96.4	96.5	96.9	97.0	97.0	97.1	97.2	97.2	97.2	97.3	97.3	97.3	97.3	97.4
≥ 3500		96.1	96.6	96.7	97.2	97.2	97.2	97.3	97.4	97.4	97.4	97.5	97.5	97.5	97.5	97.6
≥ 3000		97.2	97.6	97.8	98.2	98.2	98.2	98.4	98.5	98.5	98.5	98.6	98.6	98.6	98.6	98.7
≥ 2500		97.5	97.9	98.1	98.5	98.6	98.6	98.7	98.8	98.8	98.8	98.9	98.9	98.9	98.9	99.0
≥ 2000		97.8	98.2	98.4	98.8	98.9	98.9	99.0	99.1	99.1	99.1	99.2	99.2	99.2	99.2	99.3
≥ 1800		97.9	98.3	98.5	98.9	99.0	99.0	99.1	99.2	99.2	99.2	99.3	99.3	99.3	99.4	
≥ 1500		98.2	98.6	98.8	99.3	99.3	99.3	99.4	99.5	99.5	99.5	99.6	99.6	99.6	99.7	
≥ 1200		98.3	98.8	99.0	99.4	99.4	99.4	99.6	99.6	99.7	99.7	99.7	99.7	99.8	99.8	99.9
≥ 1000		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 900		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 800		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 700		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 600		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 500		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 400		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 300		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 200		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 100		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0
≥ 0		98.4	98.9	99.1	99.5	99.5	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 3937

USAF ETAC FORM AH 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB (STATION NAME) TURKEY/ADANA 67-76 (YEARS) ALL (MONTH)

ALL (HOURS LST)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		89.2	90.6	90.8	91.7	92.0	92.0	92.2	92.3	92.3	92.3	92.3	92.3	92.4	92.4	92.5
≥ 20000		91.4	92.8	93.0	93.9	94.2	94.2	94.4	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.6
≥ 18000		91.4	92.8	93.0	93.9	94.2	94.2	94.4	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.6
≥ 16000		91.4	92.8	93.0	93.9	94.2	94.2	94.4	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.6
≥ 14000		91.4	92.8	93.1	93.9	94.2	94.2	94.4	94.5	94.5	94.5	94.5	94.6	94.6	94.6	94.7
≥ 12000		91.8	93.2	93.5	94.4	94.7	94.7	94.9	94.9	94.9	94.9	95.0	95.0	95.0	95.0	95.1
≥ 10000		93.0	94.4	94.7	95.5	95.9	95.9	96.0	96.1	96.1	96.1	96.2	96.2	96.2	96.2	96.3
≥ 9000		93.0	94.4	94.7	95.6	95.9	95.9	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.3
≥ 8000		93.4	94.8	95.1	96.0	96.3	96.3	96.5	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.7
≥ 7000		93.4	94.8	95.1	96.0	96.3	96.3	96.5	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.7
≥ 6000		93.6	95.0	95.3	96.2	96.5	96.5	96.7	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.9
≥ 5000		93.7	95.1	95.4	96.3	96.6	96.6	96.8	96.9	96.9	96.9	96.9	96.9	97.0	97.0	97.0
≥ 4500		93.7	95.1	95.4	96.3	96.6	96.6	96.8	96.9	96.9	96.9	96.9	96.9	97.0	97.0	97.0
≥ 4000		94.7	96.2	96.4	97.3	97.6	97.6	97.8	97.9	97.9	97.9	98.0	98.0	98.0	98.0	98.1
≥ 3500		95.1	96.5	96.8	97.7	98.0	98.0	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.4
≥ 3000		95.3	97.2	97.4	98.3	98.6	98.6	98.9	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.1
≥ 2500		95.9	97.3	97.6	98.5	98.8	98.8	99.0	99.1	99.1	99.1	99.1	99.1	99.2	99.2	99.2
≥ 2000		96.0	97.4	97.7	98.6	98.9	98.9	99.1	99.2	99.2	99.2	99.2	99.2	99.3	99.3	99.4
≥ 1800		96.2	97.6	97.9	98.8	99.1	99.1	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.5
≥ 1500		96.5	97.9	98.2	99.1	99.4	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.9
≥ 1200		96.5	97.9	98.2	99.1	99.4	99.4	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 1000		96.5	97.9	98.2	99.1	99.4	99.4	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 900		96.5	97.9	98.2	99.1	99.4	99.4	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 800		96.5	98.0	98.2	99.1	99.4	99.4	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 700		96.5	98.0	98.2	99.1	99.4	99.4	99.6	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 600		96.6	98.0	98.3	99.2	99.5	99.5	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.9
≥ 500		96.6	98.0	98.3	99.2	99.5	99.5	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 400		96.6	98.0	98.3	99.2	99.5	99.5	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 300		96.6	98.0	98.3	99.2	99.5	99.5	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 200		96.6	98.0	98.3	99.2	99.5	99.5	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 100		96.6	98.0	98.3	99.2	99.5	99.5	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 0		96.6	98.0	98.3	99.2	99.5	99.5	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 4266

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-71 (YEARS) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		91.3	92.9	93.2	93.9	94.1	94.1	94.2	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.5
≥ 20000		91.7	93.2	93.4	94.1	94.3	94.3	94.5	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.7
≥ 18000		91.7	93.2	93.4	94.1	94.3	94.3	94.5	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.7
≥ 16000		91.7	93.2	93.4	94.1	94.3	94.3	94.5	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.7
≥ 14000		91.7	93.2	93.4	94.1	94.3	94.3	94.5	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.7
≥ 12000		91.8	93.2	93.5	94.2	94.4	94.4	94.6	94.6	94.7	94.7	94.7	94.7	94.7	94.7	94.8
≥ 10000		92.7	94.1	94.4	95.1	95.2	95.3	95.5	95.5	95.5	95.5	95.5	95.5	95.6	95.6	95.6
≥ 9000		92.8	94.3	94.5	95.2	95.4	95.4	95.6	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.8
≥ 8000		93.0	94.4	94.6	95.4	95.5	95.5	95.7	95.8	95.8	95.8	95.8	95.9	95.9	95.9	95.9
≥ 7000		93.0	94.4	94.6	95.4	95.5	95.5	95.7	95.8	95.8	95.8	95.8	95.9	95.9	95.9	95.9
≥ 6000		93.1	94.4	94.7	95.4	95.5	95.6	95.8	95.8	95.8	95.8	95.8	95.9	95.9	95.9	95.9
≥ 5000		93.2	94.5	94.7	95.5	95.6	95.6	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9	96.0
≥ 4500		93.1	94.6	94.8	95.5	95.7	95.7	95.9	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.1
≥ 4000		93.4	95.5	95.7	96.4	96.6	96.6	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.0
≥ 3500		94.2	95.8	96.0	96.8	96.9	96.9	97.1	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.3
≥ 3000		95.0	96.4	96.7	97.4	97.6	97.6	97.8	97.8	97.9	97.9	97.9	97.9	97.9	97.9	98.0
≥ 2500		95.1	96.6	96.9	97.6	97.7	97.8	98.0	98.0	98.0	98.0	98.1	98.1	98.1	98.1	98.1
≥ 2000		95.6	97.0	97.3	98.1	98.2	98.2	98.4	98.5	98.5	98.5	98.6	98.6	98.6	98.6	98.6
≥ 1800		95.8	97.2	97.5	98.3	98.4	98.4	98.6	98.7	98.7	98.7	98.8	98.8	98.8	98.8	98.8
≥ 1500		96.2	97.7	98.1	98.8	99.0	99.0	99.2	99.2	99.3	99.3	99.3	99.3	99.3	99.3	99.4
≥ 1200		96.3	97.9	98.2	99.0	99.1	99.2	99.3	99.4	99.4	99.4	99.5	99.5	99.5	99.5	99.5
≥ 1000		96.5	98.1	98.4	99.2	99.4	99.4	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 900		96.6	98.1	98.5	99.2	99.4	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8
≥ 800		96.6	98.2	98.5	99.3	99.4	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.9
≥ 700		96.6	98.2	98.5	99.3	99.5	99.5	99.7	99.8	99.8	99.8	99.8	99.8	99.9	99.9	99.9
≥ 600		96.6	98.2	98.5	99.3	99.5	99.5	99.7	99.8	99.8	99.8	99.9	99.9	99.9	99.9	99.9
≥ 500		96.6	98.2	98.6	99.4	99.5	99.5	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 400		96.6	98.2	98.6	99.4	99.5	99.5	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 300		96.6	98.2	98.6	99.4	99.5	99.5	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 200		96.6	98.2	98.6	99.4	99.5	99.5	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100		96.6	98.2	98.6	99.4	99.5	99.5	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0		96.6	98.2	98.6	99.4	99.5	99.5	99.8	99.8	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 4354

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		93.4	95.8	95.9	96.7	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 20000		93.4	95.8	95.9	96.7	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 18000		93.4	95.8	95.9	96.7	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 16000		93.4	95.8	95.9	96.7	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 14000		93.4	95.8	95.9	96.7	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 12000		93.4	95.8	95.9	96.7	96.7	96.8	96.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 10000		94.0	96.4	96.6	97.3	97.3	97.4	97.4	97.5	97.5	97.5	97.5	97.5	97.5	97.6	97.6
≥ 9000		94.0	96.4	96.6	97.3	97.3	97.4	97.4	97.5	97.5	97.5	97.5	97.5	97.5	97.6	97.6
≥ 8000		94.0	96.4	96.6	97.3	97.3	97.4	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.6	97.6
≥ 7000		94.2	96.5	96.7	97.4	97.4	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.7	97.7
≥ 6000		94.2	96.5	96.7	97.4	97.4	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.7	97.7
≥ 5000		94.2	96.5	96.7	97.4	97.4	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.7	97.7
≥ 4500		94.2	96.5	96.7	97.4	97.4	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.7	97.7
≥ 4000		94.7	97.0	97.2	97.9	97.9	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.2	98.2
≥ 3500		94.8	97.2	97.4	98.1	98.1	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.4	98.4
≥ 3000		95.6	98.0	98.2	98.9	98.9	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.2	99.2
≥ 2500		95.8	98.2	98.4	99.1	99.1	99.2	99.2	99.3	99.3	99.3	99.3	99.3	99.3	99.4	99.4
≥ 2000		96.0	98.4	98.5	99.3	99.3	99.4	99.4	99.5	99.5	99.5	99.5	99.5	99.5	99.6	99.6
≥ 1800		96.2	98.5	98.7	99.4	99.5	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.7	99.7	99.7
≥ 1500		96.4	98.7	98.9	99.6	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 1200		96.4	98.8	98.9	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 1000		96.4	98.8	98.9	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 900		96.4	98.8	98.9	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 800		96.4	98.8	98.9	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 700		96.4	98.8	98.9	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 600		96.4	98.8	99.0	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0
≥ 500		96.4	98.8	99.0	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0
≥ 400		96.4	98.8	99.0	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0
≥ 300		96.4	98.8	99.0	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0
≥ 200		96.4	98.8	99.0	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0
≥ 100		96.4	98.8	99.0	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0
0		96.4	98.8	99.0	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 4756

USAF ETAC FORM JUN 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		93.2	94.3	94.4	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 20000		94.9	96.0	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 18000		94.9	96.0	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 16000		94.9	96.0	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 14000		94.9	96.0	96.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.3
≥ 12000		95.1	96.2	96.3	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.5
≥ 10000		95.9	97.0	97.1	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.3
≥ 9000		96.0	97.1	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.4
≥ 8000		96.4	97.5	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 7000		96.6	97.6	97.7	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 6000		96.6	97.7	97.8	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 5000		96.8	97.9	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 4500		96.8	97.9	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.2
≥ 4000		97.1	98.2	98.3	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.5
≥ 3500		97.3	98.4	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.7	98.7	98.7	98.7	98.7
≥ 3000		98.4	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 2500		98.4	99.5	99.6	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		98.5	99.6	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 1800		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 1500		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 1200		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 1000		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 900		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 800		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 700		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 600		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 500		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 400		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 300		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 200		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 100		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 0		98.6	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 5104

USAF ETAC FORM AUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) | INCIRLIK AB TURKEY/ADANA (STATION NAME) | 66-70 (YEARS) | OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥ ⅜	≥5/16	≥¼	≥0
NO CEILING		87.5	87.6	87.6	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7
≥ 20000		91.8	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.2	92.2	92.2	92.2	92.2
≥ 18000		91.8	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.2	92.2	92.2	92.2	92.2
≥ 16000		91.9	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.2	92.2	92.2	92.2	92.2
≥ 14000		91.9	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.2	92.2	92.2	92.2	92.2
≥ 12000		92.0	93.0	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.2	93.2	93.2	93.2	93.2
≥ 10000		95.2	95.3	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.5	95.5	95.5	95.5	95.5
≥ 9000		96.0	96.2	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.4	96.4	96.4	96.4	96.4
≥ 8000		96.7	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.1	97.1	97.1	97.1	97.1
≥ 7000		97.2	97.5	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.7
≥ 6000		97.4	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8
≥ 5000		97.9	98.1	98.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.3	98.3	98.3	98.3	98.3
≥ 4500		98.1	98.3	98.4	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.6
≥ 4000		98.5	98.7	98.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.0
≥ 3500		98.8	99.0	99.1	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.3
≥ 3000		99.3	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8
≥ 2500		99.3	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8
≥ 2000		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 1800		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 1500		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 1200		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 1000		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 900		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 800		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 700		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 600		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 500		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 400		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 300		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 200		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 100		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 0		99.4	99.7	99.7	99.8	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 4579

USAF ETAC FORM AA 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-70 (YEARS) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		80.3	80.5	80.5	80.5	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 20000		84.1	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.4	84.4	84.4	84.4	84.4
≥ 18000		84.2	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.5	84.5	84.5	84.5	84.5
≥ 16000		84.2	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.5	84.5	84.5	84.5	84.5
≥ 14000		84.3	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.7
≥ 12000		85.5	85.7	85.7	85.7	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.9
≥ 10000		89.5	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.8
≥ 9000		91.2	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.5	91.5	91.5	91.5	91.5
≥ 8000		94.0	94.4	94.5	94.7	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 7000		95.6	96.1	96.2	96.6	96.7	96.7	96.7	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 6000		96.4	96.8	97.0	97.4	97.5	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.7
≥ 5000		97.0	97.4	97.6	98.0	98.1	98.1	98.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.3
≥ 4500		97.1	97.5	97.7	98.1	98.2	98.2	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.4
≥ 4000		97.3	97.8	98.0	98.4	98.5	98.5	98.6	98.6	98.6	98.6	98.7	98.7	98.7	98.7	98.7
≥ 3500		97.6	98.2	98.3	98.8	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 3000		98.1	98.7	98.8	99.4	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8
≥ 2500		98.1	98.7	98.8	99.4	99.5	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8
≥ 2000		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 1800		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 1500		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 1200		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 1000		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 900		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 800		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 700		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 600		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 500		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 400		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 300		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 200		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0		98.4	98.9	99.1	99.6	99.8	99.8	99.8	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 3616

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333N8 (STATION) I. CIPLIK AB TURKEY/ADANA (STATION NAME) 66-7 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

LL (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		67.3	67.4	67.4	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 20000		70.4	70.5	70.5	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 18000		70.4	70.5	70.5	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 16000		70.4	70.5	70.5	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 14000		70.6	70.7	70.8	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9
≥ 12000		71.4	71.5	71.5	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 10000		75.1	76.2	76.3	76.4	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 9000		78.2	78.3	78.5	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6
≥ 8000		82.7	82.9	83.1	83.5	83.5	83.5	83.5	83.5	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 7000		86.5	86.8	87.0	87.5	87.6	87.6	87.6	87.6	87.7	87.7	87.7	87.7	87.7	87.7	87.7
≥ 6000		89.2	89.9	90.1	90.7	90.8	90.8	90.8	90.8	90.8	90.9	90.9	90.9	90.9	90.9	90.9
≥ 5000		91.1	91.8	92.1	92.7	92.8	92.8	92.8	92.8	92.9	92.9	92.9	92.9	92.9	92.9	92.9
≥ 4500		92.0	92.8	93.1	93.8	93.9	94.0	94.0	94.0	94.0	94.1	94.1	94.1	94.1	94.1	94.1
≥ 4000		92.8	93.6	93.9	94.6	94.7	94.8	94.8	94.8	94.9	95.0	95.0	95.0	95.0	95.0	95.0
≥ 3500		94.2	95.1	95.4	96.2	96.2	96.3	96.3	96.3	96.4	96.5	96.5	96.5	96.5	96.5	96.5
≥ 3000		95.7	96.9	97.2	98.2	98.3	98.3	98.4	98.4	98.5	98.6	98.6	98.6	98.6	98.6	98.6
≥ 2500		96.1	97.4	97.7	98.9	99.0	99.0	99.1	99.1	99.2	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		96.4	97.7	98.0	99.2	99.3	99.4	99.4	99.4	99.5	99.5	99.5	99.6	99.6	99.6	99.6
≥ 1800		96.5	97.7	98.1	99.3	99.4	99.4	99.5	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1500		96.6	97.9	98.3	99.4	99.5	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		96.6	97.9	98.3	99.4	99.6	99.6	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 1000		96.6	97.9	98.3	99.5	99.6	99.6	99.7	99.7	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 900		96.7	98.0	98.4	99.5	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 800		96.7	98.0	98.4	99.5	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 700		96.7	98.0	98.4	99.5	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 600		96.7	98.0	98.4	99.5	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		96.7	98.0	98.4	99.5	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	100.0
≥ 400		96.7	98.0	98.4	99.5	99.6	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		96.7	98.0	98.4	99.5	99.6	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		96.7	98.0	98.4	99.5	99.6	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		96.7	98.0	98.4	99.5	99.6	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		96.7	98.0	98.4	99.5	99.6	99.7	99.8	99.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 3409

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33[illegible] / STATION — I CIRLIK AB TURKEY/ADANA / STATION NAME — 67-76 / YEARS — [illegible] / MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] / HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥⅝	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 20000		75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 18000		75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 16000		75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 14000		75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 12000		75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 10000		79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1
≥ 9000		81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 8000		83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5
≥ 7000		88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
≥ 6000		89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6
≥ 5000		91.3	91.3	91.3	91.3	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5
≥ 4500		93.4	93.4	93.4	93.7	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 4000		93.4	93.7	93.9	94.2	94.2	94.4	94.4	94.4	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 3500		94.2	94.4	94.7	94.9	94.9	95.1	95.1	95.1	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 3000		96.1	96.4	96.6	96.8	96.8	97.1	97.1	97.1	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 2500		97.1	97.6	97.8	98.1	98.1	98.3	98.3	98.3	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2000		97.1	97.6	97.8	98.1	98.1	98.3	98.3	98.3	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1800		97.3	97.8	98.1	98.3	98.3	98.5	98.5	98.5	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1500		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.3	98.8	99.0	99.3	99.3	99.5	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 412

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33305 (STATION) INCIRLIK AP TURKEY/ADANA (STATION NAME) 7-75 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8
≥ 20000		72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 18000		72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8
≥ 16000		72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8
≥ 14000		73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 12000		73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 10000		80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
≥ 9000		82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 8000		84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0
≥ 7000		88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0
≥ 6000		89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.5	89.5	89.5	89.5
≥ 5000		90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	91.0	91.0	91.0	91.0
≥ 4500		93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.5	93.5	93.5	93.5
≥ 4000		93.5	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	94.3	94.3	94.3	94.3	94.3	94.3
≥ 3500		94.8	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.5	95.8	95.8	95.8	95.8	95.9
≥ 3000		96.5	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.3	97.3	97.5	97.5	97.5	97.5
≥ 2500		97.0	97.5	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	98.0	98.0	98.3	98.3	98.3
≥ 2000		98.0	98.5	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.5	99.5	99.8	99.8	99.8
≥ 1800		98.0	98.5	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.5	99.5	99.8	99.8	99.8	99.8
≥ 1500		98.0	98.5	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.5	99.5	99.8	99.8	99.8	99.8
≥ 1200		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 1000		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 900		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 800		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 700		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 600		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 500		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 400		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 300		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 200		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 100		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 0		98.0	98.5	99.0	99.3	99.3	99.5	99.5	99.5	99.5	99.8	99.8	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 400

USAF ETAC FORM AM 84 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB (STATION NAME) TURKEY/GOJA (YEARS) 67-76

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		68.7	68.7	68.7	68.7	69.7	69.7	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 20000		72.6	72.6	72.6	72.6	72.6	72.6	72.9	72.9	72.9	72.9	73.1	73.1	73.1	73.1	73.1
≥ 18000		72.6	72.6	72.6	72.6	72.6	72.6	72.9	72.9	72.9	72.9	73.1	73.1	73.1	73.1	73.1
≥ 16000		72.6	72.6	72.6	72.6	72.6	72.6	72.9	72.9	72.9	72.9	73.1	73.1	73.1	73.1	73.1
≥ 14000		72.6	72.6	72.6	72.6	72.6	72.6	72.9	72.9	72.9	72.9	73.1	73.1	73.1	73.1	73.1
≥ 12000		72.9	72.9	72.9	72.9	72.9	72.9	73.1	73.1	73.1	73.1	73.3	73.3	73.3	73.3	73.3
≥ 10000		79.0	79.0	79.0	79.0	79.0	79.0	79.2	79.2	79.2	79.2	79.5	79.5	79.5	79.5	79.5
≥ 9000		80.7	80.7	80.7	80.7	80.7	80.7	80.9	80.9	80.9	80.9	81.2	81.2	81.2	81.2	81.2
≥ 8000		84.8	84.8	84.8	84.8	84.8	84.8	85.1	85.1	85.1	85.1	85.3	85.3	85.3	85.3	85.3
≥ 7000		88.0	88.0	88.0	88.0	88.0	88.0	88.3	88.3	88.3	88.3	88.5	88.5	88.5	88.5	88.5
≥ 6000		89.2	89.2	89.2	89.2	89.2	89.2	89.5	89.5	89.5	89.5	89.7	89.7	89.7	89.7	89.7
≥ 5000		90.0	90.0	90.0	90.0	90.0	90.0	90.2	90.2	90.2	90.2	90.5	90.5	90.5	90.5	90.5
≥ 4500		91.9	91.9	91.9	91.9	91.9	91.9	92.2	92.2	92.2	92.2	92.4	92.4	92.4	92.4	92.4
≥ 4000		93.6	93.9	93.9	93.9	93.9	94.1	94.4	94.4	94.4	94.4	94.6	94.6	94.6	94.6	94.6
≥ 3500		94.9	95.1	95.1	95.1	95.1	95.4	95.6	95.6	95.6	95.6	95.8	95.8	95.8	95.8	95.8
≥ 3000		97.1	97.3	97.3	97.3	97.3	97.6	97.8	97.8	97.8	97.8	98.0	98.0	98.0	98.0	98.0
≥ 2500		97.6	97.8	97.8	97.8	97.8	98.0	98.3	98.3	98.3	98.3	98.5	98.5	98.5	98.5	98.5
≥ 2000		97.8	98.0	98.0	98.0	98.0	98.5	99.0	99.0	99.0	99.0	99.3	99.3	99.3	99.3	99.3
≥ 1800		97.8	98.0	98.0	98.0	98.0	98.5	99.0	99.0	99.0	99.0	99.3	99.3	99.3	99.3	99.3
≥ 1500		97.8	98.0	98.0	98.3	98.3	99.0	99.5	99.5	99.5	99.5	99.7	99.8	99.8	99.8	99.8
≥ 1200		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 900		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 800		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 700		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 600		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 500		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		98.0	98.3	98.3	98.5	98.5	99.3	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 409

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7	63.7
≥ 20000		71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 18000		71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 16000		71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 14000		71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 12000		73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4
≥ 10000		79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4
≥ 9000		81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 8000		83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5
≥ 7000		86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5
≥ 6000		89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7
≥ 5000		91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 4500		91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 4000		92.5	92.5	92.5	92.5	92.5	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7
≥ 3500		94.7	94.7	94.7	94.7	94.7	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 3000		97.2	97.2	97.2	97.2	97.2	97.5	97.5	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7
≥ 2500		97.5	97.5	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	98.0	98.0	98.0	98.0	98.0
≥ 2000		98.2	98.2	98.2	98.2	98.2	98.7	98.7	98.7	98.7	98.7	99.0	99.0	99.0	99.0	99.0
≥ 1800		98.2	98.2	98.2	98.2	98.2	98.7	98.7	98.7	98.7	98.7	99.0	99.0	99.0	99.0	99.0
≥ 1500		99.0	99.0	99.0	99.0	99.0	99.5	99.5	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7
≥ 1200		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 900		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 800		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 700		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 600		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 500		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 400		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 300		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 200		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 100		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0
≥ 0		99.2	99.2	99.2	99.2	99.2	99.7	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 399

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33338 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1800 (HOURS L.S.T.)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0
≥ 20000		73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 18000		73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 16000		73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 14000		74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0
≥ 12000		74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9
≥ 10000		80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 9000		81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 8000		83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 7000		86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7
≥ 6000		89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0
≥ 5000		90.2	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4
≥ 4500		91.1	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 4000		93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 3500		94.4	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 3000		97.0	97.7	97.7	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 2500		97.4	98.1	98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2000		97.4	98.1	98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1800		97.4	98.1	98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1500		97.7	98.4	98.6	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 1200		98.1	98.8	99.1	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1000		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		98.6	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 427

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3
≥ 20000		68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 18000		68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 16000		68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 14000		69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5
≥ 12000		70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2
≥ 10000		76.9	76.9	77.1	77.1	77.1	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 9000		78.3	78.3	78.5	78.5	78.5	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 8000		81.3	81.3	81.8	81.8	81.8	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 7000		84.3	84.3	84.8	84.8	84.8	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0
≥ 6000		86.1	86.1	86.6	86.6	86.6	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 5000		88.2	88.5	88.9	88.9	88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 4500		88.7	88.9	89.4	89.4	89.4	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6
≥ 4000		89.8	90.3	90.8	90.8	90.8	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0
≥ 3500		92.6	93.1	93.5	93.5	93.5	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 3000		95.6	96.1	96.5	96.5	96.5	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 2500		96.5	97.0	97.5	97.5	97.5	97.7	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 2000		97.2	98.6	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		97.2	98.6	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		97.5	98.8	99.5	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 433

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 20000		71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 18000		71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 16000		71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 14000		72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 12000		72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4
≥ 10000		78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 9000		80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
≥ 8000		83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 7000		86.3	86.3	86.3	86.3	86.3	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5
≥ 6000		87.9	87.9	87.9	87.9	87.9	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 5000		89.3	89.3	89.3	89.3	89.3	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6
≥ 4500		90.5	90.7	90.7	91.0	91.0	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 4000		91.6	92.1	92.1	92.3	92.3	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 3500		92.8	93.3	93.5	93.7	93.7	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 3000		94.9	95.4	95.6	95.8	95.8	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 2500		96.1	96.5	96.8	97.0	97.0	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 2000		98.1	98.6	99.1	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		98.1	98.6	99.1	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.4	98.8	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 491

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

(HOURS)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7
≥ 20000		72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 18000		72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 16000		72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 14000		72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 12000		72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 10000		78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7
≥ 9000		81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 8000		84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 7000		87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9
≥ 6000		91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0
≥ 5000		92.0	92.0	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 4500		92.2	92.2	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7
≥ 4000		92.9	92.9	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4
≥ 3500		94.1	94.6	95.0	95.0	95.0	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 3000		96.9	97.4	97.9	97.9	97.9	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 2500		97.7	98.3	98.8	98.8	98.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		97.9	98.3	98.8	98.8	98.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1800		97.9	98.3	98.8	98.8	98.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1500		98.1	98.6	99.1	99.1	99.1	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1200		98.1	98.6	99.1	99.1	99.1	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		98.1	98.6	99.1	99.1	99.1	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		98.1	98.6	99.1	99.1	99.1	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 800		98.1	98.6	99.1	99.1	99.1	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		98.1	98.6	99.1	99.1	99.1	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		98.1	98.6	99.1	99.1	99.1	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		98.1	98.6	99.3	99.3	99.3	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.1	98.6	99.3	99.3	99.3	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.1	98.6	99.3	99.3	99.3	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.1	98.6	99.3	99.3	99.3	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.1	98.6	99.3	99.3	99.3	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.1	98.6	99.3	99.3	99.3	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 423

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33306 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 HOURS LST

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 20000		80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 18000		80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 16000		80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 14000		80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 12000		80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 10000		83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 9000		85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2	85.2
≥ 8000		89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6
≥ 7000		93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 6000		94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3
≥ 5000		94.8	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 4500		95.9	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 4000		96.1	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 3500		96.9	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 3000		97.4	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 2500		97.4	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 2000		97.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1800		97.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1500		97.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1200		97.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1000		97.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 900		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		98.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 386

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0600 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4
≥ 20000		78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 18000		78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 16000		78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 14000		78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 12000		78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 10000		82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 9000		84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1
≥ 8000		89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 7000		92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6
≥ 6000		92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6
≥ 5000		93.9	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 4500		95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 4000		95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 3500		96.6	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 3000		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 2500		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 2000		98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1800		98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1500		98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1200		98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1000		98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 900		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 378

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0700 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1
≥ 20000		77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 18000		77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 16000		77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 14000		77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 12000		77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.3
≥ 10000		80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7
≥ 9000		84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1
≥ 8000		87.2	87.2	87.2	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5
≥ 7000		91.1	91.1	91.1	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 6000		92.2	92.2	92.2	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4
≥ 5000		93.2	93.2	93.2	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 4500		94.0	94.0	94.0	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3
≥ 4000		94.8	94.8	94.8	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 3500		96.4	96.4	96.4	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 3000		98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 2500		98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 2000		98.4	98.4	98.7	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1800		98.4	98.4	98.7	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1500		98.4	98.4	98.7	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1200		99.0	99.0	99.2	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1000		99.0	99.0	99.2	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 900		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.2	99.2	99.5	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 384

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-1100 HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2
≥ 20000		75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 18000		75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 16000		76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0
≥ 14000		76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 12000		76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 10000		81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 9000		83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 8000		87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 7000		88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 6000		88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 5000		92.3	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5
≥ 4500		92.8	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 4000		93.6	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 3500		94.4	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 3000		97.3	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 2500		97.9	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 2000		98.7	99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1800		98.7	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1500		98.7	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1200		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.7	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 375

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33306 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 20000		78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 18000		78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 16000		78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 14000		79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 12000		79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 10000		83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
≥ 9000		85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 8000		90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 7000		90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3
≥ 6000		90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9
≥ 5000		91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9
≥ 4500		93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 4000		94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 3500		95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 3000		97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 2500		97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 2000		98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1800		99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1500		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 372

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-72 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1
≥ 20000		73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 18000		74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 16000		74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 14000		75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 12000		76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0
≥ 10000		82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 9000		84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1
≥ 8000		86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 7000		88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9
≥ 6000		89.3	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 5000		91.5	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9
≥ 4500		93.3	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 4000		94.2	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6
≥ 3500		94.9	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 3000		95.5	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 2500		97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 2000		98.4	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1800		98.9	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1500		99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1200		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 371

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33306 (STATION) INCIRLIK AB TURKEY/ASIA (STATION NAME) 7-7[illegible] (YEARS) [illegible] (MONTH)


PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)


[illegible]-2[illegible] (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	
NO CEILING		72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 20000		76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9
≥ 18000		76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9
≥ 16000		76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9
≥ 14000		77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2
≥ 12000		77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 10000		82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3
≥ 9000		86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4	86.4
≥ 8000		89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 7000		92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5
≥ 6000		94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 5000		94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 4500		95.4	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 4000		96.6	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 3500		97.1	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3000		97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 2500		98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 2000		98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 1800		98.5	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1500		98.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1200		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible] 417

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

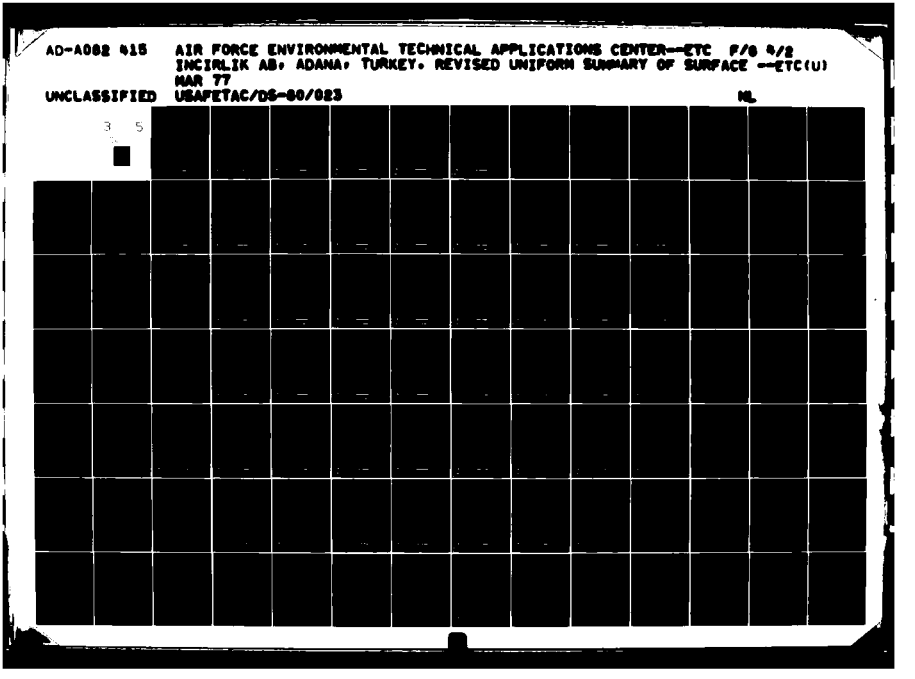
AD-A082 415
AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
INCIRLIK AB, ADANA, TURKEY. REVISED UNIFORM SUMMARY OF SURFACE --ETC(U)
MAR 77
UNCLASSIFIED
USAFETAC/DS-80/023
NL
3 5

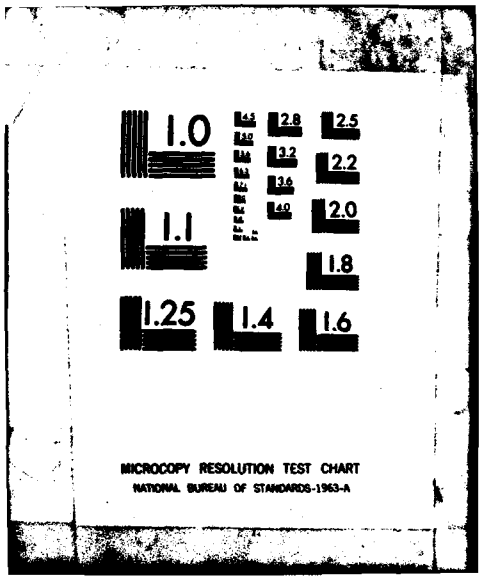
1.0
1.1
1.25
1.4
1.6
2.0
2.2
2.5
2.8
3.2
3.6
4.0
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33368 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
≥ 20000		78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 18000		78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 16000		78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 14000		78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 12000		78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 10000		81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4
≥ 9000		85.3	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 8000		89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5
≥ 7000		91.9	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6
≥ 6000		93.4	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 5000		93.9	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6
≥ 4500		95.1	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 4000		96.1	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3500		96.6	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 3000		97.3	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2500		97.5	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 2000		97.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1800		97.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1500		97.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1200		98.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 408

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0200 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.5
≥ 20000		77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.9
≥ 18000		77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	78.1
≥ 16000		77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	78.1
≥ 14000		77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	78.1
≥ 12000		77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	78.1
≥ 10000		80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.9
≥ 9000		84.1	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.8
≥ 8000		87.2	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.9
≥ 7000		90.2	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.9
≥ 6000		90.7	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.4
≥ 5000		91.8	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.5
≥ 4500		93.0	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	91.7
≥ 4000		94.2	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.9
≥ 3500		95.1	95.6	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	96.0
≥ 3000		96.9	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	97.0
≥ 2500		97.4	97.9	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.4
≥ 2000		98.8	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.8
≥ 1800		98.8	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.8
≥ 1500		98.8	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.8
≥ 1200		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1000		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 900		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 800		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
0		98.8	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 429

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

333U8 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0500 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.9	68.9	68.9	68.9	69.2
≥ 20000		74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.6	74.6	74.6	74.6	74.8
≥ 18000		74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.6	74.6	74.6	74.6	74.8
≥ 16000		74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.6	74.6	74.6	74.6	74.8
≥ 14000		74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.6	74.6	74.6	74.6	74.8
≥ 12000		74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.6	74.6	74.6	74.6	74.8
≥ 10000		81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.4	81.4	81.4	81.4	81.6
≥ 9000		84.5	84.5	84.5	84.5	84.5	84.7	84.9	84.9	84.9	84.9	85.2	85.2	85.2	85.2	85.4
≥ 8000		87.8	87.8	87.8	87.8	87.8	88.0	88.2	88.2	88.2	88.2	88.5	88.5	88.5	88.5	88.7
≥ 7000		88.9	88.9	88.9	88.9	88.9	89.2	89.4	89.4	89.4	89.4	89.6	89.6	89.6	89.6	89.9
≥ 6000		90.4	90.4	90.4	90.4	90.4	90.6	90.8	90.8	90.8	90.8	91.1	91.1	91.1	91.1	91.3
≥ 5000		92.0	92.0	92.2	92.2	92.2	92.5	92.7	92.7	92.7	92.7	92.9	92.9	92.9	92.9	93.2
≥ 4500		92.5	92.5	92.7	92.7	92.7	92.9	93.2	93.2	93.2	93.2	93.4	93.4	93.4	93.4	93.6
≥ 4000		93.6	93.6	93.9	93.9	93.9	94.1	94.4	94.4	94.4	94.4	94.6	94.6	94.6	94.6	94.8
≥ 3500		94.8	94.8	95.1	95.1	95.1	95.3	95.5	95.5	95.5	95.5	95.8	95.8	95.8	95.8	96.0
≥ 3000		96.5	96.5	96.7	96.7	96.7	96.9	97.2	97.2	97.2	97.2	97.4	97.4	97.4	97.4	97.6
≥ 2500		96.9	96.9	97.2	97.2	97.2	97.4	97.6	97.6	97.6	97.6	97.9	97.9	97.9	97.9	98.1
– 2000		97.9	97.9	98.4	98.4	98.4	98.6	98.8	98.8	98.8	98.8	99.1	99.1	99.1	99.1	99.3
≥ 1800		97.9	97.9	98.4	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.5
≥ 1500		97.9	97.9	98.4	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.5
≥ 1200		97.9	97.9	98.4	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.5
≥ 1000		97.9	97.9	98.4	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.5
≥ 900		97.9	97.9	98.4	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.5
≥ 800		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 700		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 600		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 500		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 400		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 300		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 200		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 100		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0
≥ 0		98.4	98.4	98.8	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 425

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0300 (HOURS L.S.T.)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		64.5	65.2	65.2	65.5	65.5	65.5	65.5	65.7	65.7	65.7	65.7	65.7	65.9	65.9	65.9
≥ 20000		69.8	70.5	70.5	70.8	70.8	70.8	70.8	71.0	71.0	71.0	71.0	71.0	71.3	71.3	71.3
≥ 18000		70.3	71.0	71.0	71.3	71.3	71.3	71.3	71.5	71.5	71.5	71.5	71.5	71.7	71.7	71.7
≥ 16000		70.3	71.0	71.0	71.3	71.3	71.3	71.3	71.5	71.5	71.5	71.5	71.5	71.7	71.7	71.7
≥ 14000		70.5	71.3	71.3	71.5	71.5	71.5	71.5	71.7	71.7	71.7	71.7	71.7	72.0	72.0	72.0
≥ 12000		71.7	72.5	72.5	72.7	72.7	72.7	72.7	72.9	72.9	72.9	72.9	72.9	73.2	73.2	73.2
≥ 10000		78.7	79.7	79.7	80.0	80.0	80.0	80.0	80.2	80.2	80.2	80.2	80.2	80.4	80.4	80.4
≥ 9000		81.4	82.4	82.4	82.6	82.6	82.9	82.9	83.1	83.3	83.3	83.3	83.3	83.6	83.6	83.6
≥ 8000		86.2	87.2	87.2	87.4	87.4	87.9	87.9	88.2	88.4	88.4	88.4	88.4	88.6	88.6	88.6
≥ 7000		88.9	90.1	90.1	90.3	90.3	90.8	90.8	91.1	91.3	91.3	91.3	91.3	91.5	91.5	91.5
≥ 6000		89.6	90.8	90.8	91.1	91.1	91.5	91.5	91.8	92.0	92.0	92.0	92.0	92.3	92.3	92.3
≥ 5000		91.1	92.3	92.3	92.5	92.5	93.0	93.0	93.2	93.5	93.5	93.5	93.5	93.7	93.7	93.7
≥ 4500		91.5	92.8	92.8	93.0	93.0	93.5	93.5	93.7	94.0	94.0	94.0	94.0	94.2	94.2	94.2
≥ 4000		92.0	93.5	93.5	93.7	93.7	94.2	94.2	94.4	94.7	94.7	94.7	94.7	94.9	94.9	94.9
≥ 3500		93.5	94.9	94.9	95.2	95.2	95.9	95.9	96.1	96.4	96.4	96.4	96.4	96.6	96.6	96.6
≥ 3000		94.4	95.9	95.9	96.1	96.1	96.9	96.9	97.1	97.3	97.3	97.3	97.3	97.6	97.6	97.6
≥ 2500		95.2	96.6	96.6	96.9	96.9	97.6	97.6	97.8	98.1	98.1	98.1	98.1	98.3	98.3	98.3
≥ 2000		96.1	97.6	97.6	98.1	98.1	98.8	98.8	99.0	99.3	99.3	99.3	99.3	99.5	99.5	99.5
≥ 1800		96.1	97.6	97.6	98.1	98.1	98.8	98.8	99.0	99.3	99.3	99.3	99.3	99.5	99.5	99.5
≥ 1500		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 1200		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 1000		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 900		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 800		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 700		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 600		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 500		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 400		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 300		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 200		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 100		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0
≥ 0		96.4	98.1	98.1	98.6	98.6	99.3	99.3	99.5	99.8	99.8	99.8	99.8	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 414

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33303 (STATION) İNCİRLİK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥⅞	≥¾	≥⅝	≥5/16	≥¼	≥0
NO CEILING		65.7	65.7	65.7	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1
≥ 20000		73.2	73.2	73.2	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 18000		73.2	73.2	73.2	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 16000		73.2	73.2	73.2	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 14000		73.5	73.5	73.5	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 12000		74.4	74.4	74.4	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
≥ 10000		79.4	79.4	79.4	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 9000		82.2	82.2	82.2	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 8000		86.3	86.3	86.3	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7
≥ 7000		87.4	87.4	87.4	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9
≥ 6000		89.0	89.0	89.0	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5
≥ 5000		90.6	90.6	90.6	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 4500		90.8	90.8	90.8	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 4000		91.5	91.5	91.5	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0
≥ 3500		94.1	94.3	94.5	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 3000		97.0	97.3	97.5	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 2500		97.5	97.7	97.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 2000		98.2	98.6	98.9	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.4	98.9	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 437

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33348 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 57-76 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		67.9	67.9	67.9	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2
≥ 20000		73.5	73.7	73.7	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1
≥ 18000		73.7	73.9	73.9	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 16000		73.7	73.9	73.9	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 14000		73.9	74.2	74.2	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 12000		74.8	75.1	75.1	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 10000		80.0	80.2	80.2	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 9000		82.0	82.2	82.2	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 8000		83.4	83.6	83.6	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 7000		85.6	85.8	85.8	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 6000		86.3	86.5	86.5	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9
≥ 5000		87.6	88.1	88.1	89.7	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9
≥ 4500		89.0	89.4	89.4	91.0	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 4000		89.7	90.1	90.1	91.7	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9	91.9
≥ 3500		90.8	91.2	91.2	93.0	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 3000		93.9	94.4	94.4	96.2	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 2500		96.0	96.6	96.6	98.4	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 2000		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		97.3	98.0	98.0	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 445

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33572 STATION | I CIPLIK AB TURKEY/CONUS STATION NAME | 7-73 YEARS | JAN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1400-1700 HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		62.7	63.3	63.3	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0
≥ 20000		72.3	73.1	73.1	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 18000		72.9	73.6	73.6	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 16000		72.9	73.6	73.6	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 14000		73.4	74.0	74.0	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 12000		73.4	74.0	74.0	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 10000		80.2	81.4	81.4	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 9000		81.7	82.3	82.3	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0
≥ 8000		83.3	84.9	84.9	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6
≥ 7000		86.1	87.1	87.1	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8
≥ 6000		86.7	87.8	87.8	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4
≥ 5000		88.9	89.7	89.7	90.4	90.4	90.4	90.4	90.4	90.8	90.8	90.8	90.8	90.8	90.8	91.0
≥ 4500		90.6	91.0	91.0	91.7	91.7	91.7	91.7	91.7	91.7	92.1	92.1	92.1	92.1	92.1	92.4
≥ 4000		90.4	91.5	91.5	92.1	92.1	92.1	92.1	92.1	92.6	92.6	92.6	92.6	92.6	92.6	92.8
≥ 3500		91.3	92.4	92.4	93.0	93.0	93.0	93.0	93.0	93.4	93.4	93.4	93.4	93.4	93.4	93.7
≥ 3000		94.8	95.9	95.9	96.5	96.5	96.5	96.5	96.5	96.9	96.9	96.9	96.9	96.9	96.9	97.2
≥ 2500		96.7	98.0	98.3	98.9	98.9	98.9	98.9	98.9	99.3	99.3	99.3	99.3	99.3	99.3	99.6
≥ 2000		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1800		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1500		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1200		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1000		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 900		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 800		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 0		97.2	98.3	98.5	99.3	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 458

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33362 (STATION) I. CIELIK AB, TURKEY/ADANA (STATION NAME) 7-73 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

(HOURS)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		73.7	74.3	74.3	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 20000		79.4	80.0	80.0	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 18000		79.4	80.0	80.0	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 16000		79.4	80.0	80.0	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 14000		79.4	80.0	80.0	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 12000		79.5	80.4	80.4	80.8	80.8	80.8	80.8	80.8	80.8	80.8	81.0	81.0	81.0	81.0	81.0
≥ 10000		84.7	85.0	85.0	85.4	85.4	85.4	85.4	85.4	85.4	85.4	85.6	85.6	85.6	85.6	85.6
≥ 9000		85.4	86.2	86.2	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.8	86.8	86.8	86.8	86.8
≥ 8000		88.4	89.2	89.2	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.8	89.8	89.8	89.8	89.8
≥ 7000		90.6	91.4	91.4	91.8	91.8	91.8	91.8	91.8	91.8	91.8	92.0	92.0	92.0	92.0	92.0
≥ 6000		92.8	93.6	93.6	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.2	94.2	94.2	94.2	94.2
≥ 5000		93.4	94.4	94.4	94.8	94.8	94.8	94.8	94.8	94.8	94.8	95.0	95.0	95.0	95.0	95.0
≥ 4500		93.8	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.4	95.4	95.4	95.4	95.4
≥ 4000		94.6	95.6	95.6	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.2	96.2	96.2	96.2	96.2
≥ 3500		95.2	96.2	96.2	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.8	96.8	96.8	96.8	96.8
≥ 3000		96.6	98.0	98.0	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.6	98.6	98.6	98.6	98.6
≥ 2500		97.2	98.6	98.6	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2
≥ 2000		98.0	99.4	99.4	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 900		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 800		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 700		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 600		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 500		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		98.0	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 501

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

3

332X2 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		75.5	75.5	75.5	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 20000		79.3	79.3	79.3	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 18000		79.3	79.3	79.3	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 16000		79.3	79.3	79.3	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 14000		79.3	79.3	79.3	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 12000		79.7	79.7	79.7	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
≥ 10000		84.6	84.6	84.6	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 9000		86.4	86.4	86.4	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6
≥ 8000		91.1	91.1	91.1	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 7000		94.7	94.7	94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 6000		95.3	95.3	95.3	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 5000		95.3	95.3	95.3	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 4500		95.8	95.8	95.8	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 4000		97.1	97.1	97.1	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3500		97.3	97.3	97.3	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 3000		97.6	97.6	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 2500		98.4	98.4	98.7	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 2000		99.1	99.1	99.3	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1800		99.1	99.1	99.3	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1500		99.1	99.1	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		99.1	99.1	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		99.1	99.1	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.1	99.1	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 440

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

333rd STATION — I ÇIRÇIK AB TURKEY/NATO STATION NAME — 7-7[illegible] YEARS — [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS [illegible]

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		79.0	80.3	80.3	80.3	[illegible]	[illegible]	80.3	80.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 20000		85.3	85.5	85.5	85.5	[illegible]	[illegible]	85.5	85.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 18000		85.3	85.5	85.5	85.5	[illegible]	[illegible]	[illegible]	85.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 16000		85.3	85.5	85.5	85.5	[illegible]	[illegible]	85.5	85.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 14000		86.3	86.6	86.6	86.6	[illegible]	[illegible]	86.6	86.6	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 12000		87.2	87.2	87.2	87.2	[illegible]	[illegible]	87.2	87.2	87.2	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 10000		91.6	92.1	92.1	92.1	[illegible]	[illegible]	[illegible]	92.1	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 9000		92.9	93.1	93.1	93.1	[illegible]	[illegible]	93.1	93.1	93.1	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 8000		93.9	94.3	94.3	94.3	[illegible]	[illegible]	[illegible]	94.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 7000		95.1	95.8	95.8	95.8	[illegible]	[illegible]	95.8	95.8	95.8	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 6000		95.9	96.1	96.1	96.1	[illegible]	[illegible]	[illegible]	96.1	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 5000		95.8	96.3	96.3	96.3	[illegible]	[illegible]	96.3	96.3	96.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 4500		96.3	96.8	96.8	96.8	[illegible]	[illegible]	[illegible]	96.8	96.8	[illegible]	[illegible]	[illegible]	97.1	97.1	97.3
≥ 4000		97.1	97.5	97.5	97.5	97.5	[illegible]	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	[illegible]
≥ 3500		97.1	97.5	97.5	97.5	97.5	[illegible]	[illegible]	97.5	97.5	97.5	97.5	97.5	97.6	97.8	[illegible]
≥ 3000		98.3	98.5	98.5	98.5	[illegible]	[illegible]	98.5	98.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 2500		98.0	98.5	98.5	98.5	[illegible]	[illegible]	[illegible]	98.5	98.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 2000		98.3	98.5	98.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1800		98.3	98.5	98.5	98.5	[illegible]	[illegible]	[illegible]	[illegible]	98.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1500		98.5	99.0	99.0	99.0	[illegible]	[illegible]	[illegible]	99.0	99.0	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1200		98.5	99.0	99.0	99.0	[illegible]	[illegible]	[illegible]	99.0	99.0	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1000		98.6	99.3	99.3	99.3	[illegible]	[illegible]	99.3	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 900		98.8	99.3	99.3	99.3	[illegible]	[illegible]	[illegible]	99.3	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 800		98.8	99.3	99.3	99.3	[illegible]	[illegible]	99.3	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 700		98.8	99.3	99.3	99.3	99.3	[illegible]	[illegible]	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 600		98.8	99.3	99.3	99.3	99.3	[illegible]	99.3	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 500		98.8	99.3	99.3	99.3	99.3	[illegible]	[illegible]	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 400		98.8	99.3	99.3	99.3	99.3	[illegible]	99.3	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 300		98.8	99.3	99.3	99.3	99.3	[illegible]	[illegible]	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 200		98.8	99.3	99.3	99.3	99.3	[illegible]	99.3	99.3	99.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 100		98.8	99.3	99.3	99.3	99.3	[illegible]	[illegible]	99.3	99.3	[illegible]	[illegible]	[illegible]	99.5	99.5	99.5
≥ 0		99.0	99.5	99.5	99.5	99.4	[illegible]	99.5	99.5	99.5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible] 407

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33390 STATION | I CERLIK STATION NAME | [illegible] YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¼	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		77.[illegible]	78.3	78.8	79.[illegible]	[illegible]	[illegible]	[illegible]	7[illegible].3	7[illegible].[illegible]	[illegible]	7[illegible].[illegible]	7[illegible].[illegible]	[illegible]	7[illegible].[illegible]	[illegible]
≥ 20000		[illegible].1	83.1	83.3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 18000		[illegible].1	83.1	83.3	83.[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 16000		[illegible].1	83.1	83.3	83.[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 14000		[illegible].1	83.1	83.3	83.[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 12000		[illegible].[illegible]	[illegible].2	[illegible].4	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 10000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 9000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 8000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 7000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 6000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 5000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 4500		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 4000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 3500		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 3000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 2500		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 2000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1800		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1500		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1200		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1000		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 900		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 800		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 700		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 600		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 500		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 400		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 300		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 200		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 100		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 0		[illegible].[illegible]	[illegible].[illegible]	[illegible].[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]

TOTAL NUMBER OF OBSERVATIONS 417

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

3333 STATION | I CIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

HOURS (L.S.T.)

CEILING FEET	VISIBILITY STATUTE MILES																
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		73.3	75.5	75.5	76.2	76.2	76.2	76.4	76.4	76.4	76.4	76.4	76.4	77.2	77.2	77.2
≥ 20000		79.6	81.7	81.7	82.5	82.5	82.5	82.7	82.7	82.7	82.7	82.7	82.7	83.4	83.4	84.1
≥ 18000		79.6	81.7	81.7	82.5	82.5	82.5	82.7	82.7	82.7	82.7	82.7	82.7	83.4	83.4	84.1
≥ 16000		79.6	81.7	81.7	82.5	82.5	82.5	82.7	82.7	82.7	82.7	82.7	82.7	83.4	83.4	84.1
≥ 14000		79.6	81.7	81.7	82.5	82.5	82.5	82.7	82.7	82.7	82.7	82.7	82.7	83.4	83.4	84.1
≥ 12000		82.0	84.1	84.1	84.9	84.9	84.9	85.1	85.1	85.1	85.1	85.1	85.1	85.8	85.8	86.5
≥ 10000		85.2	88.0	88.0	88.7	88.7	88.7	88.9	88.9	88.9	88.9	88.9	88.9	89.7	89.7	90.4
≥ 9000		87.0	89.2	89.2	89.9	89.9	89.9	90.1	90.1	90.1	90.1	90.1	90.1	90.9	90.9	91.6
≥ 8000		88.2	90.4	90.4	91.1	91.1	91.1	91.3	91.3	91.3	91.3	91.3	91.3	92.1	92.1	92.8
≥ 7000		88.9	91.1	91.1	91.8	91.8	91.8	92.1	92.1	92.1	92.1	92.1	92.1	92.8	92.8	93.5
≥ 6000		90.9	93.0	93.0	93.8	93.8	93.8	94.0	94.0	94.0	94.0	94.0	94.0	94.7	94.7	95.4
≥ 5000		91.5	93.8	93.8	94.5	94.5	94.5	94.7	94.7	94.7	94.7	94.7	94.7	95.4	95.4	96.2
≥ 4500		91.8	94.0	94.0	94.7	94.7	94.7	95.0	95.0	95.0	95.0	95.0	95.0	95.7	95.7	96.4
≥ 4000		92.3	94.5	94.5	95.2	95.2	95.2	95.4	95.4	95.4	95.4	95.4	95.4	96.2	96.2	96.9
≥ 3500		92.5	94.7	94.7	95.4	95.4	95.4	95.7	95.7	95.7	95.7	95.7	95.7	96.4	96.4	97.1
≥ 3000		93.8	95.9	95.9	96.9	96.9	96.9	97.1	97.1	97.1	97.1	97.1	97.1	97.8	97.8	98.5
≥ 2500		94.0	96.2	96.4	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	98.3	98.3	99.0
≥ 2000		94.0	96.2	96.4	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	98.3	98.3	99.0
≥ 1800		94.0	96.2	96.4	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	98.3	98.3	99.0
≥ 1500		94.0	96.2	96.4	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	98.3	98.3	99.0
≥ 1200		94.2	96.6	97.1	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	99.0	99.0	99.8
≥ 1000		94.2	96.6	97.1	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	99.0	99.0	99.8
≥ 900		94.2	96.6	97.1	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	99.0	99.0	99.8
≥ 800		94.2	96.6	97.1	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	99.0	99.0	99.8
≥ 700		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0
≥ 600		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0
≥ 500		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0
≥ 400		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0
≥ 300		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0
≥ 200		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0
≥ 100		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0
≥ 0		94.2	96.9	97.4	98.3	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	99.3	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 416

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) -DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0700-1100 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	0
NO CEILING		71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 20000		81.7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 18000		81.7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 16000		81.7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 14000		82.2	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4
≥ 12000		83.9	84.1	84.1	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 10000		86.5	86.8	86.8	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1	87.1
≥ 9000		87.5	87.8	87.8	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0
≥ 8000		89.3	89.5	89.5	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 7000		90.0	90.2	90.2	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5
≥ 6000		91.2	91.5	91.7	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0
≥ 5000		91.5	91.7	92.0	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 4500		91.5	91.7	92.0	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 4000		93.2	93.4	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 3500		94.5	94.9	95.1	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 3000		97.6	97.8	98.0	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 2500		97.8	98.0	98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 2000		98.8	99.0	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1800		99.0	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		99.0	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		99.3	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 410

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33306 STATION | 1 CIRLIK AB TURKEY/ADANA STATION NAME | 7-76 YEARS | APR MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1400-1600 HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		68.5	68.8	68.8	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 20000		82.5	82.8	82.8	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 18000		82.5	82.8	82.8	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 16000		82.8	83.1	83.1	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3
≥ 14000		83.3	83.6	83.6	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
≥ 12000		83.9	84.1	84.1	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 10000		86.3	86.6	86.6	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 9000		87.9	88.2	88.2	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4	88.4
≥ 8000		89.0	89.2	89.2	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5	89.5
≥ 7000		89.8	90.1	90.1	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3
≥ 6000		90.1	90.3	90.9	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 5000		90.3	90.6	91.1	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 4500		90.3	90.6	91.1	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 4000		93.3	93.5	94.1	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 3500		94.1	94.4	94.9	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 3000		96.0	96.5	97.0	97.3	97.3	97.3	97.3	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 2500		96.5	97.0	97.6	97.8	97.8	97.8	97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 2000		97.6	98.4	98.9	99.2	99.2	99.2	99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1800		97.8	98.7	99.2	99.5	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1500		97.8	98.7	99.2	99.5	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1200		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.1	98.9	99.5	99.7	99.7	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 372

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) PR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1700 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		72.8	72.8	72.8	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 20000		86.8	86.8	86.8	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3
≥ 18000		86.8	86.8	86.8	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3
≥ 16000		86.8	86.8	86.8	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3
≥ 14000		87.7	87.7	87.7	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 12000		88.5	88.5	88.5	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0
≥ 10000		90.7	90.7	90.7	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 9000		92.2	92.2	92.2	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6
≥ 8000		93.4	93.4	93.4	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 7000		93.6	93.6	93.6	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 6000		94.1	94.1	94.1	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 5000		94.1	94.1	94.1	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 4500		94.1	94.1	94.1	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 4000		95.3	95.3	95.3	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 3500		95.3	95.3	95.3	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 3000		97.5	97.5	97.5	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 2500		98.0	98.0	98.0	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2000		98.8	98.8	98.8	99.5	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.8	98.8	98.8	99.5	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 408

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1600-2000 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		82.4	82.6	82.6	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8
≥ 20000		90.0	90.4	90.4	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 18000		90.0	90.4	90.4	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 16000		90.0	90.4	90.4	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 14000		90.0	90.4	90.4	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 12000		92.0	92.4	92.4	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6
≥ 10000		94.3	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 9000		95.4	95.9	95.9	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 8000		96.7	97.2	97.2	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 7000		97.8	98.3	98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 6000		97.9	98.3	98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 5000		97.6	98.2	98.5	98.7	98.7	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 4500		98.0	98.7	98.7	98.9	98.9	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 4000		98.3	98.9	98.9	99.1	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 3500		98.3	98.9	98.9	99.1	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 3000		98.5	99.1	99.1	99.3	99.3	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 2500		98.7	99.3	99.3	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.9	99.6	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 460

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

3

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS L.T.)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2 1/2	≥2	≥1 1/2	≥1 1/4	≥1	≥3/4	≥5/8	≥1/2	≥5/16	≥1/4	≥0
NO CEILING		83.6	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
≥ 20000		88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 18000		88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 16000		88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 14000		88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 12000		90.5	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 10000		94.3	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 9000		95.7	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 8000		96.1	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 7000		97.0	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 6000		97.0	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 5000		97.3	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 4500		97.7	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 4000		98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 3500		98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 3000		98.9	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 2500		99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 2000		99.3	99.5	99.5	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		99.3	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		99.3	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 440

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB (STATION NAME) TURKEY/ADANA 67-76 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-0700 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		87.6	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.4	88.4	88.4	88.4	88.4
≥ 20000		92.5	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	93.1	93.1	93.1	93.1	93.1
≥ 18000		92.5	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	93.1	93.1	93.1	93.1	93.1
≥ 16000		92.5	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	93.1	93.1	93.1	93.1	93.1
≥ 14000		92.5	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	93.1	93.1	93.1	93.1	93.1
≥ 12000		92.5	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	93.1	93.1	93.1	93.1	93.1
≥ 10000		95.3	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.9	95.9	95.9	95.9	95.9
≥ 9000		95.5	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	96.1	96.1	96.1	96.1	96.1
≥ 8000		96.1	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.7
≥ 7000		96.1	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.7
≥ 6000		96.1	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.7
≥ 5000		96.7	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.4	97.4	97.4	97.4	97.4
≥ 4500		97.0	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6
≥ 4000		97.0	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6
≥ 3500		97.0	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6
≥ 3000		97.2	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.8	97.8	97.8	97.8	97.8
≥ 2500		97.8	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4
≥ 2000		97.8	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4
≥ 1800		97.8	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4
≥ 1500		99.0	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 1200		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 900		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 800		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 700		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 600		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 500		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
0		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 492

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33363 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) 7-79 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0500 HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	
NO CEILING		77.6	79.1	79.7	81.4	81.5	81.6	81.8	82.0	82.2	82.2	82.5	82.5	82.7	82.7	83.5
≥ 20000		83.1	84.6	85.2	86.9	87.1	87.1	87.3	87.5	87.7	87.7	87.9	87.9	88.2	88.2	89.0
≥ 18000		83.1	84.6	85.2	86.9	87.1	87.1	87.3	87.5	87.7	87.7	87.9	87.9	88.2	88.2	89.0
≥ 16000		83.1	84.6	85.2	86.9	87.1	87.1	87.3	87.5	87.7	87.7	87.9	87.9	88.2	88.2	89.0
≥ 14000		83.1	84.6	85.2	86.9	87.1	87.1	87.3	87.5	87.7	87.7	87.9	87.9	88.2	88.2	89.0
≥ 12000		83.3	84.8	85.4	87.1	87.3	87.3	87.5	87.7	87.9	87.9	88.2	88.2	88.4	88.4	89.2
≥ 10000		87.7	89.2	89.9	91.8	92.0	92.0	92.2	92.4	92.6	92.6	92.8	92.8	93.0	93.0	93.9
≥ 9000		89.0	90.5	91.1	93.0	93.2	93.2	93.4	93.7	93.9	93.9	94.1	94.1	94.3	94.3	95.1
≥ 8000		89.6	91.1	92.0	93.9	94.1	94.1	94.3	94.5	94.7	94.7	94.9	94.9	95.1	95.1	96.0
≥ 7000		90.3	91.8	92.6	94.5	94.7	94.7	94.9	95.1	95.3	95.3	95.6	95.6	95.8	95.8	96.6
≥ 6000		90.5	92.0	92.8	94.7	94.9	94.9	95.1	95.3	95.6	95.6	95.8	95.8	96.0	96.0	96.8
≥ 5000		90.7	92.2	93.0	94.9	95.1	95.1	95.3	95.6	95.8	95.8	96.0	96.0	96.2	96.2	97.0
≥ 4500		91.1	92.6	93.4	95.3	95.6	95.6	95.8	96.0	96.2	96.2	96.4	96.4	96.6	96.6	97.5
≥ 4000		91.5	93.0	93.9	95.8	96.0	96.0	96.2	96.4	96.6	96.6	96.8	96.8	97.0	97.0	97.9
≥ 3500		91.5	93.0	93.9	95.8	96.0	96.0	96.2	96.4	96.6	96.6	96.8	96.8	97.0	97.0	97.9
≥ 3000		92.0	93.4	94.3	96.2	96.4	96.4	96.6	96.8	97.0	97.0	97.2	97.2	97.5	97.5	98.3
≥ 2500		92.0	93.4	94.3	96.2	96.4	96.4	96.6	96.8	97.0	97.0	97.3	97.3	97.5	97.5	98.3
≥ 2000		92.4	93.9	94.7	96.6	96.8	96.8	97.0	97.3	97.5	97.5	97.7	97.7	97.9	97.9	98.7
≥ 1800		92.4	93.9	94.7	96.6	96.8	96.8	97.0	97.3	97.5	97.5	97.7	97.7	97.9	97.9	98.7
≥ 1500		93.0	94.5	95.3	97.3	97.5	97.5	97.7	97.9	98.1	98.1	98.3	98.3	98.5	98.5	99.4
≥ 1200		93.0	94.5	95.3	97.3	97.5	97.5	97.7	97.9	98.1	98.1	98.3	98.3	98.5	98.5	99.4
≥ 1000		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	99.8
≥ 900		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	99.8
≥ 800		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	99.8
≥ 700		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	99.8
≥ 600		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	99.8
≥ 500		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	99.8
≥ 400		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	99.8
≥ 300		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	100.0
≥ 200		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	100.0
≥ 100		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	100.0
≥ 0		93.4	94.9	95.8	97.7	97.9	97.9	98.1	98.3	98.5	98.5	98.7	98.7	98.9	98.9	100.0

TOTAL NUMBER OF OBSERVATIONS 473

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-0300 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		77.6	78.0	78.2	78.9	78.9	78.9	79.3	79.6	79.6	79.6	79.6	79.8	79.8	79.8	79.8
≥ 20000		83.1	83.8	84.0	84.7	84.7	84.7	85.1	85.3	85.3	85.3	85.4	85.6	85.6	85.6	85.6
≥ 18000		83.1	83.8	84.0	84.7	84.7	84.7	85.1	85.3	85.3	85.3	85.4	85.6	85.6	85.6	85.6
≥ 16000		83.1	83.8	84.0	84.7	84.7	84.7	85.1	85.3	85.3	85.3	85.4	85.6	85.6	85.6	85.6
≥ 14000		83.1	83.8	84.0	84.7	84.7	84.7	85.1	85.3	85.3	85.3	85.4	85.6	85.6	85.6	85.6
≥ 12000		84.7	85.3	85.6	86.2	86.2	86.2	86.7	86.9	86.9	86.9	87.1	87.1	87.1	87.1	87.1
≥ 10000		88.4	89.1	89.3	90.0	90.0	90.0	90.4	90.7	90.7	90.7	90.8	90.9	90.9	90.9	90.9
≥ 9000		91.3	92.0	92.2	92.9	92.9	92.9	93.3	93.6	93.6	93.6	93.8	93.8	93.8	93.8	93.8
≥ 8000		92.4	93.3	93.6	94.2	94.2	94.2	94.7	94.9	94.9	94.9	95.1	95.1	95.1	95.1	95.1
≥ 7000		93.3	94.2	94.4	95.1	95.1	95.1	95.6	95.8	95.8	95.8	96.0	96.0	96.0	96.0	96.0
≥ 6000		93.3	94.2	94.4	95.1	95.1	95.1	95.6	95.8	95.8	95.8	96.0	96.0	96.0	96.0	96.0
≥ 5000		93.6	94.4	94.7	95.3	95.3	95.3	95.8	96.0	96.0	96.0	96.2	96.2	96.2	96.2	96.2
≥ 4500		93.6	94.4	94.7	95.3	95.3	95.3	95.8	96.0	96.0	96.0	96.2	96.2	96.2	96.2	96.2
≥ 4000		94.0	94.9	95.1	95.8	95.8	95.8	96.2	96.4	96.4	96.4	96.7	96.7	96.7	96.7	96.7
≥ 3500		94.2	95.1	95.3	96.2	96.2	96.2	96.7	96.9	96.9	96.9	97.1	97.1	97.1	97.1	97.1
≥ 3000		95.3	96.2	96.4	97.3	97.3	97.3	97.8	98.0	98.0	98.0	98.2	98.2	98.2	98.2	98.2
≥ 2500		95.6	96.4	96.7	97.6	97.6	97.6	98.0	98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4
≥ 2000		96.4	97.3	97.6	98.4	98.4	98.4	98.9	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.3
≥ 1800		96.4	97.3	97.6	98.4	98.4	98.4	98.9	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.3
≥ 1500		96.4	97.3	97.6	98.4	98.4	98.4	98.9	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.3
≥ 1200		96.7	97.6	97.8	98.7	98.7	98.7	99.1	99.3	99.3	99.3	99.6	99.6	99.6	99.6	99.6
≥ 1000		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 900		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 800		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 700		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 600		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 500		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		97.1	98.0	98.2	99.1	99.1	99.1	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 450

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333NS (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-1100 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		76.6	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8
≥ 20000		84.4	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 18000		84.4	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 16000		84.4	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 14000		84.4	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 12000		85.1	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 10000		88.8	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0
≥ 9000		91.1	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 8000		92.0	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 7000		92.9	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 6000		92.9	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 5000		93.6	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 4500		93.6	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 4000		96.3	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 3500		96.8	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 3000		98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 2500		99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 436

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33345 STATION | I. CIGLIK AB, TURKEY/ANNEX STATION NAME | 7-73 YEARS | JAN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400 HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		77.4	77.8	77.8	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 20000		88.5	88.9	88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 18000		88.5	88.9	88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 16000		88.5	88.9	88.9	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 14000		89.1	89.5	89.5	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7	89.7
≥ 12000		89.7	90.2	90.2	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4
≥ 10000		92.1	92.5	92.5	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7	92.7
≥ 9000		93.3	93.7	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 8000		93.5	93.9	93.9	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 7000		94.1	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 6000		94.4	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 5000		94.8	95.2	95.2	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 4500		95.0	95.4	95.4	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 4000		95.8	96.2	96.2	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 3500		96.4	96.9	96.9	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 3000		99.0	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 2500		99.2	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.4	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 478

USAF ETAC FORM AK 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33356 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1700 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		78.4	78.4	78.4	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.7	78.6	78.6	78.6	78.6
≥ 20000		88.2	88.2	88.2	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
≥ 18000		88.2	88.2	88.2	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.4
≥ 16000		88.2	88.2	88.2	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
≥ 14000		88.3	88.3	88.3	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 12000		88.7	88.7	88.7	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9
≥ 10000		91.2	91.2	91.4	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5
≥ 9000		92.7	92.7	92.9	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 8000		93.8	93.8	94.0	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 7000		93.8	93.8	94.0	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 6000		95.1	95.1	95.3	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 5000		95.3	95.3	95.5	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 4500		95.7	95.7	95.9	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 4000		97.6	97.6	97.7	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 3500		97.7	97.7	97.9	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 3000		99.4	99.4	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.4	99.4	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 532

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

3 BASE STATION I CIRLIK AB TURKEY/ STATION NAME 7-76 YEARS JAN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	0
NO CEILING		81.3	81.3	81.3	81.3	81.3	81.3	81.7	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9
≥ 20000		89.3	89.3	89.3	89.4	89.4	89.4	89.6	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 18000		89.3	89.3	89.3	89.4	89.4	89.4	89.6	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 16000		89.3	89.3	89.3	89.4	89.4	89.4	89.6	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 14000		89.4	89.4	89.4	89.6	89.6	89.6	89.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 12000		90.3	90.3	90.3	90.5	90.5	90.5	90.7	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8
≥ 10000		93.8	93.8	93.8	94.0	94.0	94.0	94.2	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 9000		95.6	95.6	95.6	95.8	95.8	95.8	96.0	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 8000		96.8	96.8	96.8	97.0	97.0	97.0	97.2	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 7000		97.4	97.4	97.4	97.5	97.5	97.5	97.7	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 6000		97.9	97.9	97.9	98.1	98.1	98.1	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 5000		98.1	98.1	98.1	98.2	98.2	98.2	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 4500		98.1	98.1	98.1	98.2	98.2	98.2	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 4000		98.1	98.1	98.1	98.2	98.2	98.2	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 3500		98.2	98.2	98.2	98.4	98.4	98.4	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 3000		98.8	98.8	98.8	98.9	98.9	98.9	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2500		98.8	98.8	98.9	99.1	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 2000		98.9	98.9	99.1	99.3	99.3	99.3	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1800		99.1	99.1	99.3	99.5	99.5	99.5	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.3	99.3	99.5	99.6	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 568

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33138 (STATION) ICIRLIK AB TURKEY/ADANA (STATION NAME) 7-7 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

21[illegible]-23[illegible] (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥[illegible]	≥0
NO CEILING		84.4	84.4	84.4	84.6	84.6	84.6	84.6	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 20000		89.4	89.6	89.6	89.6	89.8	89.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 18000		89.4	89.6	89.6	89.6	89.8	89.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 16000		89.4	89.6	89.6	89.6	89.8	89.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 14000		89.4	89.6	89.6	89.8	89.8	89.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 12000		89.6	89.8	89.8	90.0	90.0	90.0	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2
≥ 10000		94.1	94.3	94.3	94.5	94.5	94.5	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 9000		95.5	95.7	95.7	95.9	95.9	95.9	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 8000		96.1	96.3	96.3	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 7000		96.1	96.3	96.3	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 6000		96.3	96.5	96.5	96.7	96.7	96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 5000		96.5	96.7	96.7	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 4500		96.5	96.7	96.7	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 4000		96.5	96.7	96.7	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 3500		96.5	96.7	96.7	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 3000		97.0	97.2	97.2	97.4	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 2500		97.4	97.6	97.8	98.0	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 2000		97.6	97.8	98.0	98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1800		98.2	98.4	98.6	98.8	98.8	98.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1500		98.8	99.0	99.2	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1200		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.2	99.4	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 508

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333[illegible] INCIRLIK AB TURKEY/ADANA 7-7[illegible] [illegible]
STATION STATION NAME YEARS WORK

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2004-0400
HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		92.8	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.4
≥ 20000		93.6	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.2
≥ 18000		93.6	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.2
≥ 16000		93.6	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.2
≥ 14000		93.6	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.2
≥ 12000		93.8	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.4
≥ 10000		96.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.2
≥ 9000		96.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.2
≥ 8000		97.0	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.6
≥ 7000		97.0	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.6
≥ 6000		97.2	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.8
≥ 5000		97.6	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.2
≥ 4500		97.6	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.2
≥ 4000		98.0	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.6
≥ 3500		98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	99.0
≥ 3000		98.8	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4
≥ 2500		98.8	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4
≥ 2000		99.0	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.6
≥ 1800		99.0	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.6
≥ 1500		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1200		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1000		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 900		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 800		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 0		99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 498

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33398 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-2300 HOUR (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		82.2	85.4	85.6	87.7	88.5	89.5	89.9	89.5	89.5	89.9	89.7	89.7	89.7	89.9	90.1
≥ 20000		83.0	86.2	86.4	88.5	89.3	90.3	90.7	90.3	90.3	90.7	90.5	90.5	90.7	90.7	90.9
≥ 18000		83.0	86.2	86.4	88.5	89.3	90.3	90.7	90.3	90.3	90.7	90.5	90.5	90.7	90.7	90.9
≥ 16000		83.0	86.2	86.4	88.5	89.3	90.3	90.7	90.3	90.3	90.7	90.5	90.5	90.7	90.7	90.9
≥ 14000		83.0	86.2	86.4	88.5	89.3	90.3	90.7	90.3	90.3	90.7	90.5	90.5	90.7	90.7	90.9
≥ 12000		83.2	86.4	86.6	88.7	89.5	90.5	90.9	90.5	90.5	90.9	90.7	90.7	90.9	90.9	91.1
≥ 10000		86.0	89.1	89.3	91.7	92.5	93.5	93.9	93.5	93.5	93.9	93.7	93.7	93.9	93.9	94.1
≥ 9000		86.0	89.1	89.3	91.7	92.5	93.5	93.9	93.5	93.5	93.9	93.7	93.7	93.9	93.9	94.1
≥ 8000		86.6	89.7	89.9	92.3	93.1	94.1	94.5	94.1	94.1	94.1	94.3	94.3	94.5	94.5	94.7
≥ 7000		86.6	89.7	89.9	92.3	93.1	94.1	94.5	94.1	94.1	94.1	94.3	94.3	94.5	94.5	94.7
≥ 6000		86.6	89.7	89.9	92.3	93.1	94.1	94.5	94.1	94.1	94.1	94.3	94.3	94.5	94.5	94.7
≥ 5000		87.2	90.3	90.5	92.9	93.7	94.7	95.1	94.7	94.7	94.7	94.9	94.9	95.1	95.1	95.3
≥ 4500		87.2	90.3	90.5	92.9	93.7	94.7	95.1	94.7	94.7	94.7	94.9	94.9	95.1	95.1	95.3
≥ 4000		88.3	91.5	91.7	94.1	94.9	95.9	96.3	95.8	95.8	95.8	96.0	96.0	96.2	96.2	96.4
≥ 3500		88.3	91.5	91.7	94.1	94.9	95.9	96.3	95.8	95.8	95.8	96.0	96.0	96.2	96.2	96.4
≥ 3000		89.5	92.7	92.9	95.3	96.0	97.0	97.4	97.0	97.0	97.0	97.2	97.2	97.4	97.4	97.6
≥ 2500		89.7	92.9	93.1	95.5	96.2	97.2	97.6	97.2	97.2	97.2	97.4	97.4	97.6	97.6	97.8
≥ 2000		89.7	92.9	93.1	95.5	96.2	97.2	97.6	97.2	97.2	97.4	97.4	97.4	97.6	97.6	97.8
≥ 1800		90.1	93.3	93.5	95.8	96.6	97.6	98.0	97.6	97.6	97.8	97.8	97.8	98.0	98.0	98.2
≥ 1500		91.1	94.3	94.5	96.8	97.6	98.6	99.0	98.6	98.6	98.8	98.8	98.8	99.0	99.0	99.2
≥ 1200		91.3	94.5	94.7	97.0	97.8	98.8	99.2	98.8	98.8	98.8	99.0	99.0	99.2	99.2	99.4
≥ 1000		91.3	94.5	94.7	97.0	97.8	98.8	99.2	98.8	98.8	98.8	99.0	99.0	99.2	99.2	99.4
≥ 900		91.3	94.5	94.7	97.0	97.8	98.8	99.2	98.8	98.8	98.8	99.0	99.0	99.2	99.2	99.4
≥ 800		91.3	94.5	94.7	97.0	97.8	98.8	99.2	98.8	98.8	98.8	99.0	99.0	99.2	99.2	99.4
≥ 700		91.3	94.5	94.7	97.0	97.8	98.8	99.2	98.8	98.8	98.8	99.0	99.0	99.2	99.2	99.4
≥ 600		91.5	94.7	94.9	97.2	98.0	99.0	99.4	99.0	99.0	99.0	99.2	99.2	99.4	99.4	99.6
≥ 500		91.5	94.7	94.9	97.2	98.0	99.0	99.4	99.2	99.2	99.2	99.4	99.4	99.6	99.6	99.8
≥ 400		91.5	94.9	95.1	97.4	98.2	99.2	99.6	99.4	99.4	99.4	99.6	99.6	99.8	99.8	100.0
≥ 300		91.5	94.9	95.1	97.4	98.2	99.2	99.6	99.4	99.4	99.4	99.6	99.6	99.8	99.8	100.0
≥ 200		91.5	94.9	95.1	97.4	98.2	99.2	99.6	99.4	99.4	99.4	99.6	99.6	99.8	99.8	100.0
≥ 100		91.5	94.9	95.1	97.4	98.2	99.2	99.6	99.4	99.4	99.4	99.6	99.6	99.8	99.8	100.0
≥ 0		91.5	94.9	95.1	97.4	98.2	99.2	99.6	99.4	99.4	99.4	99.6	99.6	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 506

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33360 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-2400 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	0
NO CEILING		87.4	88.6	85.2	88.0	88.9	89.9	89.3	90.0	90.0	90.0	90.0	90.0	90.2	90.2	90.2
≥ 20000		82.1	85.3	86.7	89.5	90.4	91.4	91.4	91.5	91.5	91.5	91.7	91.7	91.7	91.7	91.7
≥ 18000		82.1	85.3	86.7	89.5	90.4	91.4	91.4	91.5	91.5	91.5	91.7	91.7	91.7	91.7	91.7
≥ 16000		82.1	85.3	86.7	89.5	90.4	91.4	91.4	91.5	91.5	91.5	91.7	91.7	91.7	91.7	91.7
≥ 14000		82.1	85.3	86.7	89.5	90.4	91.4	91.4	91.5	91.5	91.5	91.7	91.7	91.7	91.7	91.7
≥ 12000		82.5	85.7	87.0	89.8	90.8	91.8	91.7	91.9	91.9	91.9	92.1	92.1	92.1	92.1	92.1
≥ 10000		83.3	86.5	87.8	90.6	91.5	92.5	92.5	92.7	92.7	92.7	92.9	92.9	92.9	92.9	92.9
≥ 9000		83.3	86.5	87.8	90.6	91.5	92.5	92.5	92.7	92.7	92.7	92.9	92.9	92.9	92.9	92.9
≥ 8000		83.6	86.8	88.2	91.0	91.9	92.9	92.9	93.0	93.0	93.0	93.2	93.2	93.2	93.2	93.2
≥ 7000		83.6	86.8	88.2	91.0	91.9	92.9	92.9	93.0	93.0	93.0	93.2	93.2	93.2	93.2	93.2
≥ 6000		83.6	86.8	88.2	91.0	91.9	92.9	92.9	93.0	93.0	93.0	93.2	93.2	93.2	93.2	93.2
≥ 5000		83.6	86.8	88.2	91.0	91.9	92.9	92.9	93.0	93.0	93.0	93.2	93.2	93.2	93.2	93.2
≥ 4500		83.6	86.8	88.2	91.0	91.9	92.9	92.9	93.0	93.0	93.0	93.2	93.2	93.2	93.2	93.2
≥ 4000		85.5	88.7	90.0	92.9	93.8	94.8	94.7	94.9	94.9	94.9	95.1	95.1	95.1	95.1	95.1
≥ 3500		85.7	88.9	90.2	93.0	94.0	94.9	94.9	95.1	95.1	95.1	95.3	95.3	95.3	95.3	95.3
≥ 3000		87.2	90.4	91.7	94.5	95.5	96.5	96.4	96.6	96.6	96.6	96.8	96.8	96.8	96.8	96.8
≥ 2500		88.0	91.2	92.7	95.5	96.4	97.4	97.4	97.6	97.6	97.6	97.7	97.7	97.7	97.7	97.7
≥ 2000		88.7	91.9	93.4	96.2	97.2	98.2	98.1	98.3	98.3	98.3	98.5	98.5	98.5	98.5	98.5
≥ 1800		89.3	92.5	94.0	96.8	97.7	98.7	98.7	98.9	98.9	98.9	99.1	99.1	99.1	99.1	99.1
≥ 1500		89.8	93.0	94.5	97.4	98.3	99.3	99.2	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 1200		89.8	93.0	94.5	97.4	98.3	99.3	99.2	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 1000		89.8	93.0	94.5	97.4	98.3	99.3	99.2	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 900		89.8	93.0	94.5	97.4	98.3	99.3	99.2	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 800		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8
≥ 700		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8
≥ 600		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8
≥ 500		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		90.0	93.2	94.7	97.6	98.5	99.5	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 532

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUNE (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0200-1100 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥4	≥0
NO CEILING		88.5	89.7	89.9	90.5	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0
≥ 20000		92.4	93.5	93.7	94.3	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 18000		92.4	93.5	93.7	94.3	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 16000		92.4	93.5	93.7	94.3	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 14000		92.4	93.5	93.7	94.3	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 12000		92.4	93.5	93.7	94.3	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 10000		92.6	93.7	93.9	94.5	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 9000		92.6	93.7	93.9	94.5	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 8000		92.6	93.7	93.9	94.5	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 7000		92.6	93.7	93.9	94.5	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 6000		93.1	94.3	94.5	95.0	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 5000		93.1	94.3	94.5	95.0	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 4500		93.1	94.3	94.5	95.0	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 4000		95.6	96.8	96.9	97.5	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 3500		95.6	97.7	97.9	98.5	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 3000		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		97.5	98.7	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 524

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33760 (STATION) I-CIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-1800 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		90.4	91.0	91.0	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.7
≥ 20000		94.3	94.8	94.8	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.6
≥ 18000		94.3	94.8	94.8	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.6
≥ 16000		94.3	94.8	94.8	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.6
≥ 14000		94.3	94.8	94.8	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.6
≥ 12000		94.8	95.4	95.4	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	96.1
≥ 10000		95.4	95.9	95.9	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.7
≥ 9000		95.4	95.9	95.9	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.7
≥ 8000		95.9	96.1	96.1	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.9
≥ 7000		95.9	96.1	96.1	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.9
≥ 6000		95.8	96.3	96.3	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.1
≥ 5000		95.8	96.3	96.3	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.1
≥ 4500		95.8	96.3	96.3	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.1
≥ 4000		97.2	97.8	97.8	98.4	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.5
≥ 3500		97.8	98.3	98.3	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 3000		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 2500		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 2000		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1800		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1500		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1200		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1000		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 900		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 800		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 0		98.7	99.3	99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 543

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		91.2	92.6	92.8	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 20000		94.8	96.2	96.4	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 18000		94.8	96.2	96.4	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 16000		94.8	96.2	96.4	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 14000		94.8	96.2	96.4	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 12000		95.5	96.9	97.1	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 10000		96.2	97.6	97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 9000		96.2	97.6	97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 8000		96.2	97.6	97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 7000		96.2	97.6	97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 6000		96.6	97.9	98.1	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 5000		96.6	97.9	98.1	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 4500		96.6	97.9	98.1	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 4000		97.1	98.6	98.8	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 3500		97.4	99.0	99.1	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 3000		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		97.8	99.3	99.5	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 582

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-75 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1000-2000 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		92.7	94.1	94.3	94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	95.1
≥ 20000		95.4	96.6	96.8	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.5
≥ 18000		95.4	96.6	96.8	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.4	97.3	97.3	97.5
≥ 16000		95.4	96.6	96.8	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.5
≥ 14000		95.7	97.0	97.2	97.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.9
≥ 12000		96.6	97.9	98.0	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.8
≥ 10000		97.0	98.2	98.4	98.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 9000		97.0	98.2	98.4	98.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 8000		97.7	98.9	99.1	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8
≥ 7000		97.7	98.9	99.1	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8
≥ 6000		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 5000		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 4500		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 4000		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 3500		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 3000		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 2500		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 2000		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1800		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1500		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1200		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1000		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 900		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 800		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 0		97.9	99.1	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 564

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		94.2	94.4	94.4	94.6	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 20000		94.4	94.6	94.6	94.8	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 18000		94.4	94.6	94.6	94.8	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 16000		94.4	94.6	94.6	94.8	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 14000		94.4	94.6	94.6	94.8	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 12000		94.8	95.0	95.0	95.2	95.2	95.2	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 10000		96.3	96.5	96.5	96.7	96.7	96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 9000		96.5	96.7	96.7	96.9	96.9	96.9	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 8000		97.7	97.9	97.9	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 7000		97.7	97.9	97.9	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 6000		97.7	97.9	97.9	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 5000		97.7	97.9	97.9	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 4500		97.7	97.9	97.9	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 4000		97.9	98.1	98.1	98.3	98.3	98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 3500		98.1	98.3	98.3	98.5	98.5	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 3000		98.3	98.5	98.5	98.6	98.6	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2500		98.3	98.5	98.5	98.6	98.6	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2000		98.3	98.5	98.5	98.6	98.6	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1800		98.6	98.8	98.8	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1500		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.4	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 517

USAF ETAC FORM AA 84 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0600 (HOURS L.S.T.)

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥ 5/16	≥¼	≥0
NO CEILING		91.8	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 20000		91.8	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 18000		91.8	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 16000		91.8	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 14000		91.8	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 12000		91.8	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 10000		93.0	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 9000		93.2	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 8000		93.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 7000		93.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 6000		93.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 5000		94.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 4500		94.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 4000		94.2	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 3500		94.4	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 3000		95.0	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 2500		95.0	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 2000		95.4	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 1800		96.4	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 1500		97.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1200		97.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1000		98.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 900		98.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 800		98.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		98.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		98.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		98.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		98.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 498

USAF ETAC FORM AA 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0900 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		84.5	88.5	88.7	90.8	91.2	91.2	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.9
≥ 20000		84.5	88.5	88.7	90.8	91.2	91.2	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.9
≥ 18000		84.5	88.5	88.7	90.8	91.2	91.2	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.9
≥ 16000		84.5	88.5	88.7	90.8	91.2	91.2	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.9
≥ 14000		84.5	88.5	88.7	90.8	91.2	91.2	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.9
≥ 12000		84.5	88.5	88.7	90.8	91.2	91.2	91.6	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.9
≥ 10000		86.0	90.0	90.2	92.3	92.7	92.7	93.1	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.5
≥ 9000		86.6	90.6	90.8	92.9	93.3	93.3	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	94.0
≥ 8000		86.6	90.6	90.8	92.9	93.3	93.3	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	94.0
≥ 7000		86.6	90.6	90.8	92.9	93.3	93.3	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	94.0
≥ 6000		86.6	90.6	90.8	92.9	93.3	93.3	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	94.0
≥ 5000		86.6	90.6	90.8	92.9	93.3	93.3	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	94.0
≥ 4500		86.6	90.6	90.8	92.9	93.3	93.3	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	94.0
≥ 4000		86.9	91.0	91.2	93.3	93.7	93.7	94.0	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.4
≥ 3500		87.1	91.2	91.4	93.5	93.9	93.9	94.2	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.6
≥ 3000		87.9	91.9	92.1	94.2	94.6	94.6	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.4
≥ 2500		88.1	92.1	92.3	94.4	94.8	94.8	95.2	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.6
≥ 2000		89.4	93.5	93.7	95.8	96.2	96.2	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.9
≥ 1800		89.4	93.5	93.7	95.8	96.2	96.2	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.9
≥ 1500		90.2	94.4	94.8	97.1	97.5	97.5	97.9	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.3
≥ 1200		90.6	95.0	95.4	97.9	98.3	98.3	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8	99.0
≥ 1000		91.0	95.6	96.0	98.5	98.8	98.8	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.6
≥ 900		91.2	95.8	96.2	98.7	99.0	99.0	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8
≥ 800		91.2	95.8	96.2	98.7	99.0	99.0	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
0		91.2	95.8	96.2	98.7	99.0	99.0	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 521

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 47-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0400 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		83.4	86.4	87.8	91.1	91.8	91.8	92.7	93.0	93.0	93.1	93.2	93.2	93.2	93.2	93.2
≥ 20000		83.5	86.6	88.0	91.2	91.9	91.9	92.8	93.2	93.2	93.2	93.4	93.4	93.4	93.4	93.4
≥ 18000		83.5	86.6	88.0	91.2	91.9	91.9	92.8	93.2	93.2	93.2	93.4	93.4	93.4	93.4	93.4
≥ 16000		83.5	86.6	88.0	91.2	91.9	91.9	92.8	93.2	93.2	93.2	93.4	93.4	93.4	93.4	93.4
≥ 14000		83.5	86.6	88.0	91.2	91.9	91.9	92.8	93.2	93.2	93.2	93.4	93.4	93.4	93.4	93.4
≥ 12000		83.5	86.6	88.0	91.2	91.9	91.9	92.8	93.2	93.2	93.2	93.4	93.4	93.4	93.4	93.4
≥ 10000		83.9	86.9	88.4	91.6	92.3	92.3	93.2	93.6	93.6	93.6	93.7	93.7	93.7	93.7	93.7
≥ 9000		84.3	87.3	88.7	91.9	92.7	92.7	93.6	93.9	93.9	93.9	94.1	94.1	94.1	94.1	94.1
≥ 8000		84.3	87.3	88.7	91.9	92.7	92.7	93.6	93.9	93.9	93.9	94.1	94.1	94.1	94.1	94.1
≥ 7000		84.3	87.3	88.7	91.9	92.7	92.7	93.6	93.9	93.9	93.9	94.1	94.1	94.1	94.1	94.1
≥ 6000		84.3	87.3	88.7	91.9	92.7	92.7	93.6	93.9	93.9	93.9	94.1	94.1	94.1	94.1	94.1
≥ 5000		84.3	87.3	88.7	91.9	92.7	92.7	93.6	93.9	93.9	93.9	94.1	94.1	94.1	94.1	94.1
≥ 4500		84.3	87.3	88.7	91.9	92.7	92.7	93.6	93.9	93.9	93.9	94.1	94.1	94.1	94.1	94.1
≥ 4000		86.0	89.3	90.7	93.9	94.6	94.6	95.5	95.9	95.9	95.9	96.1	96.1	96.1	96.1	96.1
≥ 3500		86.2	89.4	91.1	94.3	95.0	95.0	95.9	96.2	96.2	96.2	96.4	96.4	96.4	96.4	96.4
≥ 3000		86.8	90.0	91.6	94.8	95.5	95.5	96.4	96.8	96.8	96.8	97.0	97.0	97.0	97.0	97.0
≥ 2500		86.8	90.0	91.8	95.0	95.7	95.7	96.6	97.0	97.0	97.0	97.1	97.1	97.1	97.1	97.1
≥ 2000		87.7	90.9	92.7	95.9	96.6	96.6	97.5	97.9	97.9	97.9	98.0	98.0	98.0	98.0	98.0
≥ 1800		87.7	90.9	92.7	95.9	96.6	96.6	97.5	97.9	97.9	97.9	98.0	98.0	98.0	98.0	98.0
≥ 1500		87.8	91.4	93.2	96.4	97.1	97.1	98.0	98.4	98.4	98.4	98.6	98.6	98.6	98.6	98.6
≥ 1200		88.0	91.6	93.4	96.6	97.3	97.3	98.2	98.6	98.6	98.6	98.7	98.7	98.7	98.7	98.7
≥ 1000		88.2	91.8	93.7	97.0	97.7	97.7	98.6	98.9	98.9	98.9	99.1	99.1	99.1	99.1	99.1
≥ 900		88.2	91.8	93.7	97.0	97.7	97.7	98.6	98.9	98.9	98.9	99.1	99.1	99.1	99.1	99.1
≥ 800		88.4	91.9	93.9	97.1	97.9	97.9	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.3
≥ 700		88.4	91.9	93.9	97.1	98.0	98.0	98.9	99.3	99.3	99.3	99.5	99.5	99.5	99.5	99.5
≥ 600		88.4	91.9	93.9	97.1	98.0	98.0	99.1	99.5	99.5	99.5	99.6	99.6	99.6	99.6	99.6
≥ 500		88.4	91.9	94.1	97.3	98.2	98.2	99.3	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		88.4	91.9	94.1	97.3	98.2	98.2	99.3	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		88.4	91.9	94.1	97.3	98.2	98.2	99.3	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		88.4	91.9	94.1	97.3	98.2	98.2	99.3	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		88.4	91.9	94.1	97.3	98.2	98.2	99.3	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		88.4	91.9	94.1	97.3	98.2	98.2	99.3	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 559

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33302 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 7-76 YEARS | ALL MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-1100 HOURS (LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		93.6	94.6	94.8	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 20000		93.8	94.8	95.0	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 18000		93.8	94.8	95.0	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 16000		93.8	94.8	95.0	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 14000		93.8	94.8	95.0	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 12000		93.8	94.8	95.0	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 10000		94.0	95.0	95.1	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 9000		94.0	95.0	95.1	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 8000		94.0	95.0	95.1	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 7000		94.0	95.0	95.1	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 6000		94.0	95.0	95.1	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 5000		94.0	95.0	95.1	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 4500		94.0	95.0	95.1	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 4000		95.7	96.6	96.8	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 3500		96.6	97.6	97.8	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 3000		97.6	98.5	98.7	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2500		97.6	98.5	98.7	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.3	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 535

USAF ETAC FORM AFL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		93.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 20000		93.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 18000		93.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 16000		93.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 14000		93.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 12000		93.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 10000		93.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 9000		93.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 8000		93.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 7000		93.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 6000		93.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 5000		93.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 4500		94.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 4000		95.3	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 3500		96.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3000		98.2	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 2500		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 800		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 300		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 200		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0
≥ 100		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0
≥ 0		98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 559

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1799 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		96.6	96.7	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0	97.2	97.2	97.2	97.2	97.2
≥ 20000		96.7	97.4	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8
≥ 18000		96.7	97.4	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8
≥ 16000		96.7	97.4	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8
≥ 14000		96.7	97.4	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8
≥ 12000		96.7	97.4	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8
≥ 10000		97.4	98.0	98.2	98.2	98.2	98.3	98.3	98.3	98.3	98.3	98.5	98.5	98.5	98.5	98.5
≥ 9000		97.4	98.0	98.2	98.2	98.2	98.3	98.3	98.3	98.3	98.3	98.5	98.5	98.5	98.5	98.5
≥ 8000		97.7	98.3	98.5	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.9	98.9	98.9	98.9	98.9
≥ 7000		97.7	98.3	98.5	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.9	98.9	98.9	98.9	98.9
≥ 6000		97.7	98.3	98.5	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.9	98.9	98.9	98.9	98.9
≥ 5000		97.7	98.3	98.5	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.9	98.9	98.9	98.9	98.9
≥ 4500		98.0	98.7	98.8	98.8	98.8	99.0	99.0	99.0	99.0	99.2	99.4	99.4	99.4	99.4	99.4
≥ 4000		98.7	99.3	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9
≥ 3500		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 3000		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 2500		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 2000		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 900		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 800		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 700		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 600		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 500		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		98.8	99.5	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 604

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33303 — I CIRLIK AB TURKEY/ADANA — 7-7½ YEARS — JAN

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1964-1969

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		96.5	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 20000		96.5	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.3
≥ 18000		96.5	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.3
≥ 16000		96.8	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.3
≥ 14000		96.8	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.3
≥ 12000		97.0	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.7
≥ 10000		98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 9000		98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 8000		98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 7000		98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 6000		98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 5000		98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 4500		98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.1
≥ 4000		98.4	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.6
≥ 3500		98.8	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.6
≥ 3000		98.8	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.6
≥ 2500		99.1	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8
≥ 2000		99.1	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.8
≥ 1800		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1500		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1200		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1000		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 900		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 800		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 0		99.3	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 565

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333.2 (STATION) I. CIRLIK AB TURKEY/ADANA (STATION NAME) 7-75 (YEARS) (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

(HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	0
NO CEILING		92.2	92.2	92.2	92.2	92.2	92.2	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4
≥ 20000		92.6	92.6	92.6	92.6	92.6	92.6	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 18000		92.6	92.6	92.6	92.6	92.6	92.6	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 16000		92.6	92.6	92.6	92.6	92.6	92.6	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 14000		92.6	92.6	92.6	92.6	92.6	92.6	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 12000		93.0	93.0	93.0	93.0	93.0	93.0	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 10000		94.3	94.3	94.3	94.3	94.3	94.3	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 9000		94.3	94.3	94.3	94.3	94.3	94.3	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 8000		94.7	94.7	94.7	94.7	94.7	94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 7000		94.7	94.7	94.7	94.7	94.7	94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 6000		94.9	94.9	94.9	94.9	94.9	94.9	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 5000		94.9	94.9	94.9	94.9	94.9	94.9	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 4500		94.9	94.9	94.9	94.9	94.9	94.9	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 4000		95.5	95.5	95.5	95.5	95.5	95.5	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 3500		95.5	95.5	95.5	95.5	95.5	95.5	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 3000		95.9	95.9	95.9	95.9	95.9	95.9	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 2500		96.5	96.5	96.5	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 2000		96.9	96.9	96.9	96.9	96.9	96.9	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 1800		97.5	97.5	97.5	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 1500		99.0	99.0	99.0	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1200		99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 1000		99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		99.6	99.6	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 800		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 513

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333x6 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0259 (HOURS, LST)

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0
NO CEILING		95.7	96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 20000		95.7	96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 18000		95.7	96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 16000		95.7	96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 14000		95.7	96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 12000		95.7	96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 10000		96.0	96.6	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 9000		96.0	96.6	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 8000		96.6	96.6	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 7000		96.2	96.7	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 6000		96.2	96.7	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 5000		96.2	96.7	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 4500		96.2	96.7	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 4000		96.2	96.7	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3500		96.2	96.7	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3000		97.3	97.6	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 2500		97.5	98.0	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 2000		97.5	98.0	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 1800		97.4	98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 1500		95.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		96.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		96.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		98.9	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 552

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) 7-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0400-0700 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		87.5	92.1	92.9	95.7	95.7	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.4	97.4
≥ 20000		87.5	92.1	92.9	95.7	95.7	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.4	97.4
≥ 18000		87.5	92.1	92.9	95.7	95.7	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.4	97.4
≥ 16000		87.5	92.1	92.9	95.7	95.7	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.4	97.4
≥ 14000		87.5	92.1	92.9	95.7	95.7	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.4	97.4
≥ 12000		87.5	92.1	92.9	95.7	95.7	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.4	97.4
≥ 10000		88.2	92.9	93.6	96.4	96.4	96.4	96.8	96.8	96.8	96.8	96.8	96.8	97.0	97.4	97.4
≥ 9000		88.2	92.9	93.6	96.4	96.4	96.4	96.8	96.8	96.8	96.8	96.8	96.8	97.0	97.4	97.4
≥ 8000		88.2	92.9	93.6	96.4	96.4	96.4	96.8	96.8	96.8	96.8	96.8	96.8	97.0	97.4	97.4
≥ 7000		88.2	92.9	93.6	96.4	96.4	96.4	96.8	96.8	96.8	96.8	96.8	96.8	97.0	97.4	97.4
≥ 6000		88.2	92.9	93.6	96.4	96.4	96.4	96.8	96.8	96.8	96.8	96.8	96.8	97.0	97.4	97.4
≥ 5000		88.2	92.9	93.6	96.4	96.4	96.4	96.8	96.8	96.8	96.8	96.8	96.8	97.0	97.4	97.4
≥ 4500		88.2	92.9	93.6	96.4	96.4	96.4	96.8	96.8	96.8	96.8	96.8	96.8	97.0	97.4	97.4
≥ 4000		88.6	93.3	94.0	96.8	96.8	96.8	97.2	97.2	97.2	97.2	97.2	97.2	97.4	97.8	97.8
≥ 3500		88.6	93.3	94.0	96.8	96.8	96.8	97.2	97.2	97.2	97.2	97.2	97.2	97.4	97.8	97.8
≥ 3000		90.3	94.9	95.7	98.5	98.5	98.5	98.9	98.9	98.9	98.9	98.9	98.9	99.1	99.4	99.4
≥ 2500		90.3	94.9	95.7	98.5	98.5	98.5	98.9	98.9	98.9	98.9	98.9	98.9	99.1	99.4	99.4
≥ 2000		90.3	94.9	95.7	98.5	98.5	98.5	98.9	98.9	98.9	98.9	98.9	98.9	99.1	99.4	99.4
≥ 1800		90.6	95.3	96.1	98.9	98.9	98.9	99.3	99.3	99.3	99.3	99.3	99.3	99.4	99.6	99.8
≥ 1500		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 1200		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 1000		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 900		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 800		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 700		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 600		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 500		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 400		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 300		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 200		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 100		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0
≥ 0		90.8	95.5	96.3	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.6	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 534

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33[illegible] STATION | I CIRLIK AB STATION NAME TURKEY/ADANA | 7-76 YEARS | [illegible] HOURS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (L.S.T.)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		82.0	90.5	90.8	93.9	94.2	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 20000		82.0	90.5	90.8	93.9	94.2	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 18000		82.0	90.5	90.8	93.9	94.2	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 16000		82.0	90.5	90.8	93.9	94.2	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 14000		82.0	90.5	90.8	93.9	94.2	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 12000		82.0	90.5	90.8	93.9	94.2	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 10000		82.4	91.0	91.3	94.4	94.7	95.3	95.3	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 9000		82.4	91.0	91.3	94.4	94.7	95.3	95.3	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 8000		82.4	91.0	91.3	94.4	94.7	95.3	95.3	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 7000		82.6	91.1	91.5	94.5	94.8	95.5	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 6000		82.6	91.1	91.5	94.5	94.8	95.5	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 5000		82.6	91.1	91.5	94.5	94.8	95.5	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 4500		82.6	91.1	91.5	94.5	94.8	95.5	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 4000		83.4	91.9	92.3	95.3	95.7	96.3	96.3	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 3500		83.7	92.3	92.6	95.7	96.0	96.6	96.6	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 3000		85.3	93.9	94.2	97.3	97.6	98.2	98.2	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 2500		85.8	94.4	94.7	97.7	98.1	98.7	98.7	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 2000		86.5	95.0	95.3	98.4	98.7	99.4	99.4	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1800		86.5	95.0	95.3	98.4	98.7	99.4	99.4	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1500		86.6	95.2	95.5	98.6	98.9	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		86.6	95.2	95.5	98.6	98.9	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		86.6	95.2	95.5	98.6	98.9	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		86.6	95.2	95.5	98.6	98.9	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 800		86.6	95.2	95.5	98.6	98.9	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		86.6	95.2	95.5	98.6	98.9	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 621

USAF ETAC FORM AK 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 INCIRLIK AB TURKEY/ADANA 67-76 ALL
STATION STATION NAME YEARS MONTHS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0700-1100
HOURS (L.S.T.)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		94.4	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 20000		94.4	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 18000		94.4	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 16000		94.4	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 14000		94.4	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 12000		94.4	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 10000		94.6	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 9000		94.6	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 8000		94.6	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 7000		94.6	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 6000		94.6	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 5000		94.6	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 4500		94.6	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 4000		95.5	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 3500		95.5	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 3000		96.3	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 2500		97.0	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 2000		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		97.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 626

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 7-75 (YEARS) ANNUAL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

120 (HOURS) - 1400 (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		95.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 20000		95.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 18000		95.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 16000		95.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 14000		95.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 12000		95.8	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 10000		97.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 9000		97.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 8000		97.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 7000		97.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 6000		97.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 5000		97.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 4500		97.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 4000		96.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 3500		98.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 3000		98.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		98.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 650

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I CIRLIK AB TURKEY/ADANA (STATION NAME) -7-7 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1700 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 20000		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 18000		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 16000		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 14000		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 12000		98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 10000		98.6	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 9000		98.6	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 8000		98.6	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 7000		98.6	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 6000		98.6	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 5000		98.6	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 4500		98.6	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 4000		98.9	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 3500		99.1	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 3000		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.2	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 638

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1000-2000 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		97.5	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 20000		97.5	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 18000		97.5	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 16000		97.5	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 14000		97.5	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 12000		97.5	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 10000		98.4	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 9000		98.4	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 8000		98.5	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 7000		98.5	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 6000		98.5	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 5000		98.5	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 4500		98.5	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 4000		98.7	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 3500		99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 3000		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 610

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333X8 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) ...6 (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 20000		96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 18000		96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 16000		96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 14000		96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 12000		96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 10000		96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 9000		96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 8000		96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 7000		97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 6000		97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 5000		97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 4500		97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 4000		97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3500		97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 3000		97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 2500		98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 2000		98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 1800		99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1500		99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 1200		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 800		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 545

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33306 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0700 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 20000		96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 18000		96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 16000		96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 14000		96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 12000		96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 10000		96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 9000		97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 8000		97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 7000		97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 6000		97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 5000		97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 4500		97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 4000		98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 3500		98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 3000		99.0	99.0	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 2500		99.2	99.2	99.2	99.2	99.2	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 592

USAF ETAC FORM AR 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33338 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		95.1	95.4	95.4	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.7	95.6	95.6	95.6	95.6
≥ 20000		96.3	96.6	96.6	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.9	96.8	96.8	96.8	96.8
≥ 18000		96.3	96.6	96.6	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.9	96.8	96.8	96.8	96.8
≥ 16000		96.3	96.6	96.6	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.9	96.8	96.8	96.8	96.8
≥ 14000		96.3	96.6	96.6	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.9	96.8	96.8	96.8	96.8
≥ 12000		96.3	96.6	96.6	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.9	96.8	96.8	96.8	96.8
≥ 10000		97.0	97.3	97.3	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 9000		97.0	97.3	97.3	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 8000		97.1	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 7000		97.1	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 6000		97.1	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.7	97.6	97.6	97.6	97.6
≥ 5000		97.3	97.6	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.9	97.8	97.8	97.8	97.8
≥ 4500		97.3	97.6	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.9	97.8	97.8	97.8	97.8
≥ 4000		97.6	98.0	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 3500		97.8	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 3000		99.2	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 2500		99.2	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 2000		99.3	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		99.3	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.3	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 591

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I. CIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0001-0300 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	
NO CEILING		90.0	94.0	94.4	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 20000		91.0	95.1	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 18000		91.0	95.1	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 16000		91.0	95.1	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 14000		91.0	95.1	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 12000		91.2	95.2	95.7	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 10000		92.0	96.0	96.4	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 9000		92.0	96.0	96.4	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 8000		92.7	96.8	97.2	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 7000		92.9	96.9	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 6000		92.9	96.9	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 5000		92.9	96.9	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 4500		92.9	96.9	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 4000		93.2	97.4	97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 3500		93.4	97.5	98.0	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 3000		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		95.1	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 647

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333 18 STATION | I CIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0700-1100 HOURS L.S.T.

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥ 5/16	≥¼	≥0
NO CEILING		92.3	94.1	94.3	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6
≥ 20000		94.6	96.1	96.2	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 18000		94.0	96.1	96.2	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 16000		94.0	96.1	96.2	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 14000		94.0	96.1	96.2	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 12000		94.1	96.2	96.4	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 10000		94.9	97.0	97.1	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 9000		94.9	97.0	97.1	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 8000		95.0	97.1	97.3	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 7000		95.2	97.3	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 6000		95.2	97.3	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 5000		95.2	97.3	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 4500		95.3	97.4	97.6	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 4000		95.8	97.9	98.0	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 3500		96.2	98.3	98.5	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 3000		97.3	99.4	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		97.3	99.4	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		97.4	99.5	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 662

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33360 (STATION) INCIRLIK AB TURKEY/USAFE (STATION NAME) 65-75 (YEARS) (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

(HOURS (L.S.T.))

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	0
NO CEILING		94.1	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 20000		95.4	95.7	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 18000		95.4	95.7	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 16000		95.4	95.7	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 14000		95.4	95.7	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 12000		96.8	96.2	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 10000		97.0	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 9000		97.0	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 8000		97.0	97.1	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 7000		97.4	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 6000		97.4	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 5000		97.4	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 4500		97.4	97.6	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 4000		97.7	97.9	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 3500		98.0	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 3000		99.5	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 625

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33306 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 65-70 YEARS | ALL MONTHS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

13[illegible]-17[illegible] HOURS

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		90.9	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 20000		95.4	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 18000		95.4	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 16000		95.4	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 14000		95.8	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 12000		96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 10000		97.7	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 9000		97.7	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 8000		97.8	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 7000		98.0	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 6000		98.1	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 5000		98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 4500		98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 4000		98.5	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 3500		98.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 3000		99.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 689

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I.CIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1.2y-2000 (HOURS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2 ½	≥2	≥1 ¼	≥1 ¼	≥1	≥¾	≥⅝	≥ ½	≥5 16	≥ ¼	≥0
NO CEILING		95.4	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.7	95.7	95.7	95.7	95.7
≥ 20000		96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0
≥ 18000		96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0
≥ 16000		96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0
≥ 14000		96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.0	97.0	97.0	97.0	97.0
≥ 12000		97.0	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.3	97.3	97.3	97.3	97.3
≥ 10000		97.3	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.6	97.6	97.6	97.6	97.6
≥ 9000		97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.8	97.8	97.8	97.8	97.8
≥ 8000		97.9	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.2	98.2	98.2	98.2	98.2
≥ 7000		98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.5	98.5	98.5	98.5	98.5
≥ 6000		98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.5	98.5	98.5	98.5	98.5
≥ 5000		99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.2	99.3	99.3	99.3	99.3
≥ 4500		99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.2	99.3	99.3	99.3	99.3
≥ 4000		99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.2	99.3	99.3	99.3	99.3
≥ 3500		99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.4	99.4	99.4	99.4	99.4
≥ 3000		99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.9	99.9	99.9	99.9
≥ 2500		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 900		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 800		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 700		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 600		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 500		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 400		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 300		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 200		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 100		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0
≥ 0		99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 668

USAF ETAC FORM NO. 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 STATION — I.CIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — APR MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

2100-2300 HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 20000		95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.7
≥ 18000		95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.7
≥ 16000		95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.7
≥ 14000		95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.7
≥ 12000		95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.7
≥ 10000		96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	97.2
≥ 9000		96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	97.2
≥ 8000		97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	98.0
≥ 7000		97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	98.2
≥ 6000		97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	98.2
≥ 5000		98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.3
≥ 4500		98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.3
≥ 4000		98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.7
≥ 3500		98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.0
≥ 3000		99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.5
≥ 2500		99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.7
≥ 2000		99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.7
≥ 1800		99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.8
≥ 1500		99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.8
≥ 1200		99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.8
≥ 1000		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 900		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 800		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 700		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 600		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 500		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 400		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 300		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 200		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 100		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 0		99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 599

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 64-70 (YEARS) 01 (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0600 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 20000		94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 18000		94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 16000		94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 14000		94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 12000		94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 10000		96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 9000		97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 8000		97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 7000		98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 6000		98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 5000		98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 4500		98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 4000		99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 3500		99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 3000		99.3	99.3	99.3	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 2500		99.3	99.3	99.3	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 2000		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.6	99.6	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 545

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33358 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0001-0900 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		90.2	90.2	90.2	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.4	90.7
≥ 20000		91.4	91.8	91.8	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.3
≥ 18000		91.4	91.8	91.8	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.3
≥ 16000		91.4	91.8	91.8	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.3
≥ 14000		91.4	91.8	91.8	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.0	92.3
≥ 12000		92.0	92.3	92.3	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.9
≥ 10000		95.2	95.5	95.5	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	96.1
≥ 9000		96.1	96.4	96.4	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	97.0
≥ 8000		96.3	96.6	96.6	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	97.1
≥ 7000		97.1	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	98.0
≥ 6000		97.1	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	98.0
≥ 5000		97.5	97.9	97.9	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.2	98.4
≥ 4500		97.7	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.6
≥ 4000		98.0	98.4	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.9
≥ 3500		98.0	98.4	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.9
≥ 3000		98.6	98.9	98.9	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.5
≥ 2500		98.8	99.1	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.6
≥ 2000		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 1800		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 1500		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 1200		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 1000		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 900		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 800		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 700		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 600		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 500		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 400		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 300		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 200		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 100		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0
≥ 0		99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 560

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33398 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-70 (YEARS) ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0001-0500 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		86.9	86.9	86.9	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.2	87.2	87.2	87.4
≥ 20000		90.7	91.2	91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.5	91.5	91.5	91.5	91.7
≥ 18000		90.7	91.2	91.2	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.5	91.5	91.5	91.5	91.7
≥ 16000		90.8	91.3	91.3	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.7	91.7	91.7	91.7	91.9
≥ 14000		90.3	91.3	91.3	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.7	91.7	91.7	91.7	91.9
≥ 12000		91.7	92.2	92.2	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.6	92.6	92.6	92.6	92.7
≥ 10000		94.6	95.2	95.2	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.5	95.5	95.5	95.5	95.7
≥ 9000		95.0	95.5	95.5	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.8	95.8	95.8	95.8	96.0
≥ 8000		95.9	96.4	96.4	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.9
≥ 7000		96.5	97.1	97.1	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.4	97.4	97.4	97.4	97.6
≥ 6000		97.1	97.6	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.9	97.9	97.9	97.9	98.1
≥ 5000		97.2	97.8	97.8	97.9	97.9	97.9	97.9	97.9	97.9	97.9	98.1	98.1	98.1	98.1	98.3
≥ 4500		97.8	98.3	98.3	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.6	98.6	98.6	98.6	98.8
≥ 4000		98.4	99.0	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.5
≥ 3500		98.6	99.3	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.8
≥ 3000		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 2500		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 2000		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 1800		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 1500		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 1200		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 1000		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 900		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 800		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 700		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 600		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 500		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 400		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 300		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 200		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 100		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0
≥ 0		99.0	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 578

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333X8 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) CT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 20000		93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 18000		93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 16000		93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 14000		93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 12000		94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0
≥ 10000		95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 9000		96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 8000		97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 7000		98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 6000		98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 5000		98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 4500		98.3	98.3	98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 4000		98.6	98.6	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 3500		99.0	99.0	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 3000		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 900		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 800		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 700		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 600		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 500		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		99.7	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 587

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 65-76 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1400-1800 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		83.9	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 20000		90.4	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 18000		90.4	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 16000		90.4	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 14000		90.4	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 12000		92.6	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 10000		94.2	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 9000		95.0	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 8000		96.3	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 7000		96.6	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 6000		96.6	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 5000		97.3	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 4500		97.3	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 4000		97.9	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 3500		98.2	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 3000		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 565

USAF ETAC FORM JUL 64 0-1465 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB (STATION NAME) TURKEY/ADANA [illegible] (YEARS) CT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1700 (HOUR LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		83.2	83.2	83.4	83.4	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 20000		89.3	89.6	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 18000		89.8	89.8	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 16000		89.8	89.8	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 14000		89.8	89.8	90.0	90.0	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1	90.1
≥ 12000		90.8	90.8	91.0	91.0	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 10000		93.3	93.3	93.4	93.4	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 9000		94.8	94.8	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 8000		96.0	96.0	96.2	96.2	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 7000		96.4	96.4	96.5	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 6000		96.5	96.5	96.7	96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 5000		97.2	97.2	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 4500		97.5	97.6	97.8	97.9	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 4000		98.4	98.4	98.6	98.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 3500		98.8	98.8	98.8	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 3000		99.3	99.3	99.5	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.3	99.3	99.7	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 578

USAF ETAC FORM AA 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

3

CEILING VERSUS VISIBILITY

33358 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 56-70 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-2000 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.4	88.4	88.4	88.4	88.4
≥ 20000		91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.9	91.9	91.9	91.9	91.9
≥ 18000		91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.9	91.9	91.9	91.9	91.9
≥ 16000		91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.9	91.9	91.9	91.9	91.9
≥ 14000		91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.9	91.9	91.9	91.9	91.9
≥ 12000		92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.9	92.9	92.9	92.9	92.9
≥ 10000		95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.3	95.3	95.3	95.3	95.3
≥ 9000		96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.1	96.1	96.1	96.1	96.1
≥ 8000		97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.1	97.1	97.1	97.1	97.1
≥ 7000		97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.5	97.5	97.5	97.5	97.5
≥ 6000		97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.8	97.8	97.8	97.8	97.8
≥ 5000		98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.7
≥ 4500		98.7	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	99.0	99.0	99.0	99.0	99.0
≥ 4000		98.7	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	99.0	99.0	99.0	99.0	99.0
≥ 3500		99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.3	99.3	99.3	99.3	99.3
≥ 3000		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 2500		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 2000		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 900		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 800		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 700		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 600		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 500		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 595

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33348 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-70 (YEARS) 01 (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2400 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 20000		93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 18000		93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 16000		93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 14000		93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 12000		94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 10000		96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 9000		97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 8000		97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 7000		97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 6000		97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 5000		98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 4500		98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 4000		98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 3500		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 3000		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 571

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33368 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 64-78 (YEARS) V (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0400-0800 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.9	85.9	85.9	85.9	85.9
≥ 20000		87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.5	87.5	87.5	87.5	87.5
≥ 18000		87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.5	87.5	87.5	87.5	87.5
≥ 16000		87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.5	87.5	87.5	87.5	87.5
≥ 14000		87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.5	87.5	87.5	87.5	87.5
≥ 12000		88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.4	88.4	88.4	88.4	88.4
≥ 10000		91.2	91.4	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.4	91.4	91.4	91.4	91.4
≥ 9000		91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.6	91.6	91.6	91.6	91.6
≥ 8000		94.3	95.0	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2	95.5	95.5	95.5	95.5	95.5
≥ 7000		96.4	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.7	98.0	98.0	98.0	98.0	98.0
≥ 6000		96.4	97.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.7	98.0	98.0	98.0	98.0	98.0
≥ 5000		96.6	98.0	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4
≥ 4500		96.6	98.0	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.4	98.4	98.4	98.4	98.4
≥ 4000		96.8	98.2	98.2	98.4	98.6	98.6	98.6	98.6	98.6	98.6	98.9	98.9	98.9	98.9	98.9
≥ 3500		96.8	98.4	98.4	98.6	98.9	98.9	98.9	98.9	98.9	98.9	99.1	99.1	99.1	99.1	99.1
≥ 3000		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 2500		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 2000		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 1800		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 1500		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 1200		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 1000		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 900		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 800		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 700		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 600		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 500		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 400		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 300		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 200		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 100		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0
≥ 0		97.5	99.1	99.1	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 441

USAF ETAC FORM AUG 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) I.CIRLIK AB TURKEY/A (STATION NAME) 66-76 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0201-0200 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		84.5	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 20000		87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8
≥ 18000		87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8
≥ 16000		87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8
≥ 14000		87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8
≥ 12000		89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 10000		90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9
≥ 9000		91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5
≥ 8000		95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 7000		97.0	97.0	97.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 6000		97.8	97.8	97.8	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 5000		98.4	98.4	98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 4500		98.4	98.4	98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 4000		98.4	98.4	98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 3500		98.4	98.4	98.4	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 3000		98.9	98.9	98.9	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2500		98.9	98.9	98.9	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 449

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333?? (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 1-7C (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 20000		85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
≥ 18000		85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
≥ 16000		85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
≥ 14000		86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 12000		86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 10000		89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 9000		91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 8000		94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6
≥ 7000		96.5	96.5	96.5	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 6000		96.5	96.5	96.5	97.0	97.0	97.0	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 5000		97.6	97.6	97.6	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 4500		97.6	97.6	97.6	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 4000		98.3	98.5	98.5	98.9	98.9	98.9	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 3500		98.5	98.7	98.7	99.1	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 3000		98.9	99.1	99.1	99.6	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		98.9	99.1	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		99.1	99.4	99.4	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 46?

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33[illegible] I ÇIRLIK AB TURKEY/ADANA [illegible]-76
STATION STATION NAME YEARS MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-1100
HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0
NO CEILING		75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 20000		81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7
≥ 18000		81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7
≥ 16000		81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7
≥ 14000		82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3
≥ 12000		83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4
≥ 10000		89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 9000		92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9
≥ 8000		95.3	95.3	95.3	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 7000		95.7	95.7	95.7	96.3	96.6	96.9	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6
≥ 6000		96.1	96.1	96.1	97.0	97.2	97.2	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 5000		96.3	96.3	96.3	97.2	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 4500		96.3	96.3	96.3	97.2	97.4	97.4	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 4000		96.6	96.8	96.8	97.8	97.8	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 3500		97.0	97.0	97.0	97.8	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 3000		97.8	97.8	97.8	98.9	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 2500		97.8	97.8	97.8	98.9	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 2000		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.5	98.5	98.5	99.6	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 464

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333U8 (STATION) I.INCIRLIK AB TURKEY/mDATA (STATION NAME) 60-76 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1800 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 20000		80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3
≥ 18000		80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 16000		80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 14000		81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 12000		82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 10000		88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.6
≥ 9000		91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 8000		92.7	93.4	93.4	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 7000		93.6	94.3	94.3	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 6000		96.0	97.3	97.3	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 5000		96.8	97.5	97.5	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 4500		97.0	97.7	97.7	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 4000		97.3	97.9	97.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 3500		97.7	98.4	98.4	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 3000		97.9	98.6	98.6	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 2500		97.9	98.6	98.6	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 2000		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0		98.4	99.1	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 437

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333X5 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 60-75 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1501-1700 (HOURS L.S.T.)

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0
NO CEILING		77.1	78.0	78.0	78.0	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.4
≥ 20000		82.6	83.5	83.5	83.5	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	84.0
≥ 18000		82.9	83.7	83.7	83.7	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.2
≥ 16000		82.9	83.7	83.7	83.7	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.2
≥ 14000		82.9	83.7	83.7	83.7	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.2
≥ 12000		84.0	84.9	84.9	84.9	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.3
≥ 10000		88.6	89.5	89.5	89.5	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	90.0
≥ 9000		90.4	91.3	91.3	91.3	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.5	91.8
≥ 8000		92.9	93.8	94.0	94.2	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.7
≥ 7000		94.0	94.9	95.1	95.4	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.8
≥ 6000		94.4	95.3	95.5	95.8	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.2
≥ 5000		95.3	96.2	96.4	96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	97.1
≥ 4500		96.0	96.9	97.1	97.3	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.8
≥ 4000		96.2	97.1	97.3	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	98.0
≥ 3500		96.9	97.8	98.0	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.7
≥ 3000		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 2500		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 2000		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1800		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1500		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1200		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 1000		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 900		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 800		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 700		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 600		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 500		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 400		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 300		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 200		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 100		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0
≥ 0		97.3	98.2	98.4	99.1	99.6	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 449

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33368 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-70 (YEARS) JUN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1000-2000 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		82.5	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3
≥ 20000		85.0	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 18000		85.0	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 16000		85.0	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 14000		85.0	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 12000		86.4	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 10000		89.7	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5
≥ 9000		91.6	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4
≥ 8000		93.6	94.4	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 7000		95.7	96.5	97.1	97.1	97.1	97.1	97.1	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 6000		96.7	97.5	98.1	98.1	98.1	98.1	98.1	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 5000		97.1	97.9	98.6	98.6	98.6	98.6	98.6	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 4500		97.1	97.9	98.6	98.6	98.6	98.6	98.6	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 4000		97.5	98.4	99.0	99.0	99.0	99.0	99.0	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 3500		97.9	98.8	99.4	99.4	99.4	99.4	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 3000		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.1	99.0	99.6	99.6	99.6	99.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 486

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333rd STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 60-76 YEARS | JUL MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-2300 HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 20000		82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 18000		82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 16000		82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 14000		82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 12000		83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4
≥ 10000		88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
≥ 9000		89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0	89.0
≥ 8000		92.7	92.7	93.0	93.4	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7
≥ 7000		95.6	95.6	95.8	96.3	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 6000		96.7	96.7	97.0	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 5000		97.4	97.4	97.7	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 4500		97.4	97.4	97.7	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 4000		97.4	97.4	97.7	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 3500		97.9	97.9	98.1	98.5	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 3000		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		98.6	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 427

USAF ETAC FORM AA 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33318 (STATION) I ÇIRLIK AB TURKEY/ADANA (STATION NAME) 56-7 (YEARS) 12 (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-0200 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2 7/8	≥2	≥1 7/8	≥1 3/4	≥1	≥3/4	≥5/8	≥1/2	≥5/16	≥1/4	≥0
NO CEILING		69.9	69.9	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 20000		72.0	72.0	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 18000		72.0	72.0	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 16000		72.0	72.0	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 14000		72.0	72.0	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 12000		72.7	72.7	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0
≥ 10000		77.5	77.5	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7
≥ 9000		79.4	79.4	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 8000		82.5	82.5	82.7	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4	83.4
≥ 7000		87.2	87.2	87.4	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 6000		90.5	90.8	91.0	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7
≥ 5000		92.4	92.7	92.9	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 4500		92.9	93.1	93.4	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 4000		94.1	94.3	94.5	95.3	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 3500		95.5	96.2	96.4	97.2	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 3000		96.7	97.4	97.9	98.0	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2500		97.2	97.9	98.3	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		97.4	98.1	98.6	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1800		97.4	98.1	98.6	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1500		97.6	98.3	98.8	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		97.9	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 422

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0300-0500 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		65.7	65.7	65.7	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 20000		67.4	67.4	67.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 18000		67.4	67.4	67.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 16000		67.4	67.4	67.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 14000		67.4	67.4	67.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 12000		67.4	67.4	67.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 10000		73.5	73.5	73.5	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 9000		75.5	75.5	75.5	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 8000		80.6	81.1	81.1	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 7000		86.1	86.6	86.6	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0
≥ 6000		89.4	89.9	89.9	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 5000		91.4	91.9	91.9	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 4500		93.2	93.7	93.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 4000		93.9	94.4	94.4	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	96.0
≥ 3500		94.7	95.2	95.2	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.7
≥ 3000		96.7	97.5	97.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	99.0
≥ 2500		97.2	98.0	98.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.5
≥ 2000		97.5	98.2	98.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.7
≥ 1800		97.5	98.2	98.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.7
≥ 1500		97.5	98.2	98.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.7
≥ 1200		97.5	98.2	98.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.7
≥ 1000		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 900		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 800		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 700		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 600		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 500		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 400		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 300		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 200		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 100		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0
≥ 0		97.5	98.5	98.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 396

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33348 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 65-72 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0600-0800 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6
≥ 20000		69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 18000		69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 16000		69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 14000		69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥ 12000		70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 10000		77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 9000		77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
≥ 8000		82.0	82.7	82.7	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9
≥ 7000		86.8	87.6	87.6	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0
≥ 6000		89.3	90.0	90.0	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5
≥ 5000		92.0	92.9	92.9	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4
≥ 4500		92.9	93.9	93.9	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 4000		94.4	95.4	95.4	95.9	95.9	95.9	95.9	95.9	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 3500		96.1	97.1	97.1	97.6	97.6	97.6	97.6	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 3000		97.0	99.0	99.0	99.5	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2500		97.6	99.0	99.0	99.5	99.5	99.5	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 2000		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		97.8	99.3	99.3	99.8	99.8	99.8	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 410

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 65-75 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-1100 HOURS (LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		65.2	65.7	65.7	65.7	65.7	65.7	66.0	66.0	66.0	66.0	66.0	66.0	66.0	66.0	66.0
≥ 20000		68.8	69.3	69.3	69.3	69.3	69.3	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5
≥ 18000		68.8	69.3	69.3	69.3	69.3	69.3	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5
≥ 16000		68.8	69.3	69.3	69.3	69.3	69.3	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5
≥ 14000		69.8	70.2	70.2	70.2	70.2	70.2	70.5	70.5	70.5	70.5	70.5	70.5	70.5	70.5	70.5
≥ 12000		71.2	71.7	71.7	71.7	71.7	71.7	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 10000		76.4	76.9	76.9	76.9	76.9	76.9	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 9000		78.3	78.8	78.8	78.8	78.8	78.8	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0
≥ 8000		82.9	83.3	83.3	84.0	84.0	84.0	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3
≥ 7000		86.2	86.7	86.7	87.4	87.4	87.4	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6	87.6
≥ 6000		88.8	89.3	89.3	90.0	90.0	90.0	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2	90.2
≥ 5000		90.5	91.2	91.2	91.9	91.9	91.9	92.1	92.1	92.4	92.4	92.4	92.4	92.4	92.4	92.4
≥ 4500		91.7	92.4	92.9	93.6	93.6	94.0	94.3	94.3	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 4000		92.1	92.9	93.3	94.0	94.0	94.5	94.8	94.8	95.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 3500		93.6	94.3	94.8	95.7	95.7	96.2	96.4	96.4	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 3000		94.3	95.3	96.0	97.1	97.1	97.6	97.9	97.9	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 2500		95.0	96.2	96.7	98.3	98.3	98.8	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 2000		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		95.5	96.7	97.1	99.0	99.0	99.5	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 420

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

333CB (STATION) I.INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-72 (YEARS) 11 (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2 1/2	≥2	≥1 1/2	≥1 1/4	≥1	≥3/4	≥5/8	≥1/2	≥5/16	≥1/4	≥0
NO CEILING		66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1
≥ 20000		70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 18000		70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 16000		70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 14000		70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 12000		71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5
≥ 10000		76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 9000		78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 8000		82.7	82.7	83.2	83.4	83.4	83.4	83.4	83.4	83.6	83.9	83.9	83.9	83.9	83.9	83.9
≥ 7000		85.5	85.7	86.2	86.4	86.4	86.4	86.4	86.4	86.7	86.9	86.9	86.9	86.9	86.9	86.9
≥ 6000		87.1	87.4	87.9	88.1	88.1	88.1	88.1	88.1	88.3	88.6	88.6	88.6	88.6	88.6	88.6
≥ 5000		89.5	89.7	90.2	90.7	90.7	90.7	90.7	90.7	90.9	91.1	91.1	91.1	91.1	91.1	91.1
≥ 4500		90.9	91.4	91.8	92.3	92.3	92.3	92.3	92.3	92.5	92.8	92.8	92.8	92.8	92.8	92.8
≥ 4000		91.8	92.3	92.8	93.2	93.2	93.2	93.2	93.2	93.5	93.7	93.7	93.7	93.7	93.7	93.7
≥ 3500		93.9	94.9	95.3	95.8	95.8	95.8	95.8	95.8	96.0	96.3	96.3	96.3	96.3	96.3	96.3
≥ 3000		95.3	97.2	97.9	98.4	98.4	98.4	98.4	98.4	98.6	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2500		95.3	97.4	98.1	98.6	98.6	98.6	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.1	99.1
≥ 2000		95.3	97.4	98.1	98.6	98.6	98.6	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.1	99.1
≥ 1800		95.3	97.4	98.1	98.6	98.6	98.6	98.6	98.6	98.8	99.1	99.1	99.1	99.1	99.1	99.1
≥ 1500		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8
≥ 800		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		96.0	98.1	98.8	99.3	99.3	99.3	99.3	99.3	99.5	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 428

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-72 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1700 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		65.9	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2
≥ 20000		70.9	71.1	71.1	71.1	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 18000		70.9	71.1	71.1	71.1	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 16000		70.9	71.1	71.1	71.1	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 14000		71.1	71.4	71.4	71.4	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6
≥ 12000		72.0	72.2	72.2	72.2	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 10000		76.6	76.8	76.8	76.8	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 9000		78.1	78.3	78.3	78.3	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 8000		83.7	83.9	83.9	83.9	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2
≥ 7000		86.8	87.2	87.2	87.2	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4
≥ 6000		89.2	90.2	90.2	90.5	90.7	90.7	90.7	90.7	90.7	90.7	90.9	90.9	90.9	90.9	90.9
≥ 5000		90.9	92.0	92.0	92.2	92.4	92.4	92.4	92.4	92.4	92.4	92.6	92.6	92.6	92.6	92.6
≥ 4500		92.0	93.1	93.1	93.5	93.7	93.7	93.7	93.7	93.7	93.9	93.9	93.9	93.9	93.9	93.9
≥ 4000		92.6	93.7	93.7	94.1	94.4	94.4	94.4	94.4	94.4	94.6	94.6	94.6	94.6	94.6	94.6
≥ 3500		93.9	95.0	95.0	95.4	95.7	95.7	95.7	95.7	95.7	95.9	95.9	95.9	95.9	95.9	95.9
≥ 3000		95.7	96.7	96.7	97.8	98.0	98.0	98.3	98.3	98.5	98.7	98.7	98.7	98.7	98.7	98.7
≥ 2500		95.7	96.7	96.7	98.5	98.9	98.9	99.1	99.1	99.3	99.5	99.6	99.6	99.6	99.6	99.6
≥ 2000		95.7	96.7	96.7	98.5	98.9	98.9	99.1	99.1	99.3	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1800		95.7	96.7	96.7	98.5	98.9	98.9	99.1	99.1	99.3	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1500		95.9	97.0	97.0	98.7	99.1	99.1	99.3	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		95.9	97.0	97.0	98.7	99.1	99.1	99.3	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		95.9	97.0	97.0	98.7	99.1	99.1	99.3	99.3	99.6	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		96.1	97.2	97.2	98.9	99.3	99.3	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 461

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33302 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) (A-7) (YEARS) (EC) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

(1100Y-2300) (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		70.7	70.7	70.7	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 20000		73.4	73.4	73.4	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 18000		73.4	73.4	73.4	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 16000		73.4	73.4	73.4	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 14000		73.4	73.4	73.4	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 12000		73.4	73.4	73.4	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 10000		76.6	76.6	76.9	77.3	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5
≥ 9000		80.1	80.1	80.3	80.8	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 8000		83.1	83.8	84.1	84.5	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
≥ 7000		86.2	86.9	87.1	88.0	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 6000		89.3	90.4	90.6	91.5	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7
≥ 5000		90.4	91.7	91.9	93.0	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 4500		90.2	92.1	92.4	93.4	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7
≥ 4000		91.5	92.8	93.0	94.1	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3
≥ 3500		92.8	94.1	94.3	95.4	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 3000		94.3	95.6	95.9	97.4	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 2500		95.4	96.7	97.2	98.9	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 2000		95.6	96.9	97.4	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1800		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1500		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1200		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1000		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 900		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 800		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		96.1	97.4	97.8	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400		96.1	97.4	97.8	99.0	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		96.1	97.4	97.8	99.0	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		96.1	97.4	97.8	99.0	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		96.1	97.4	97.8	99.0	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		96.1	97.4	97.8	99.0	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 458

USAF ETAC FORM AA 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

33360 (STATION) INCIRLIK AB TURKEY/DATA (STATION NAME) 56-75 (YEARS) (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300 (HOURS L.S.T.)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	
NO CEILING		68.6	68.6	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 20000		70.5	70.5	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 18000		70.5	70.5	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 16000		70.5	70.5	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 14000		70.5	70.5	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 12000		71.5	71.5	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0
≥ 10000		74.6	74.6	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4
≥ 9000		76.0	76.0	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7
≥ 8000		82.9	82.9	83.6	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8
≥ 7000		86.5	86.5	87.2	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4
≥ 6000		90.3	90.0	91.8	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3
≥ 5000		91.8	92.5	93.5	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0
≥ 4500		92.0	93.2	94.2	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 4000		92.3	93.5	94.4	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 3500		93.2	94.4	95.4	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 3000		94.9	96.4	97.3	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 2500		95.7	97.1	98.1	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 2000		96.6	98.1	99.0	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 1800		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1500		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		96.6	98.3	99.3	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 414

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

SKY COVER SUMMARY

The individual increments formerly reported in total sky cover of airways observations are no longer available from the source data from Jan 71 and later. Increments reported after 1970 are clear, scattered, broken, overcast, partial obscuration and obscured (0, 3, 9, or 10). Therefore, the sky cover summary for this station is limited to the period through Dec 70.

PART D SKY COVER

This summary is prepared from hourly observations and is a percentage frequency distribution of total sky cover by tenths, plus mean sky cover, and total number of observations. It is presented in two tables as follows:

1. By month and annual - all hours and all years combined.

2. By month - by standard 3-hour groups.

NOTE: # 1: Sky cover (total cloud amount) was not reported by U. S. Services until mid 1945. Data, when available, were punched for Air Force stations beginning in 1946, but were not available for Navy stations until 1948 or 1949. Weather Bureau stations recorded total cloud amount in remarks beginning sometime in 1945, but few stations have punched data prior to 1948. This summary will, of course, be limited to period of available data.

NOTE: # 2: Some sources of punched data used for this summary report cloud amounts in oktas. These have been converted to tenths prior to summarizing, and notation is made on the form to indicate that data were originally reported in oktas. The manner of conversion is given below:

OKTAS	TENTHS
0	0
1	1
2	3
3	4
4	5
5	6
6	8
7	9
8 (or obscured)	10

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 INCIRLIK AB TURKEY/ADANA 66-7[illegible] ALL
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
JAN	ALL	12.5	7.9	2.3	4.9	4.8	4.6	5.3	1.3	7.7	15.2	33.6	6.5	2372
FEB		19.6	9.5	1.9	6.2	4.8	3.6	4.4	1.9	6.6	14.4	27.3	5.6	1946
MAR		15.0	7.9	1.7	5.6	5.1	4.7	6.3	2.3	10.8	15.0	25.7	6.0	1972
APR		16.2	12.0	2.4	9.0	7.9	7.1	6.0	2.2	10.5	11.5	15.2	5.0	1910
MAY		14.4	12.5	3.7	9.3	9.2	7.3	7.5	2.8	9.1	11.3	13.0	4.9	1970
JUN		26.2	19.7	2.9	11.2	10.1	8.5	6.4	1.4	6.1	5.2	2.4	3.1	1914
JUL		42.9	19.0	2.4	8.0	8.9	5.3	5.6	1.2	3.9	2.4	.6	2.1	1975
AUG		37.9	24.0	3.5	10.8	8.2	7.0	4.7	.3	2.6	.9	.2	1.9	1968
SEP		46.4	14.5	4.0	9.0	7.6	5.0	3.7	1.9	3.8	2.0	1.6	2.1	2630
OCT		33.4	12.2	3.2	8.3	7.3	6.3	4.8	2.9	6.8	7.3	7.7	3.5	2706
NOV		24.0	9.0	3.8	5.2	5.5	3.9	6.3	3.2	9.8	10.5	19.1	5.0	2442
DEC		15.2	6.2	2.9	5.6	6.0	3.5	5.5	2.4	9.7	13.2	29.8	6.2	2578
TOTALS		25.3	12.9	2.9	7.8	7.1	5.6	5.5	2.0	7.3	9.1	14.7	4.3	26383

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-70 (PERIOD) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
JAN	00-02	17.8	7.9	2.1	5.8	5.1	3.1	5.5	1.4	4.6	11.0	35.6	6.0	292
	03-05	19.3	7.1	2.7	4.1	5.4	4.1	4.1	.7	6.4	12.2	34.1	6.0	296
	06-08	11.0	6.9	1.7	3.4	7.9	7.6	2.1	1.0	10.0	14.1	34.4	6.6	291
	09-11	7.0	10.6	2.0	4.0	6.6	4.3	5.3	1.3	9.3	15.6	34.1	6.7	302
	12-14	7.4	9.8	1.7	5.4	3.0	5.4	7.1	1.7	5.7	20.6	32.1	6.8	296
	15-17	5.6	8.6	3.0	4.0	3.0	4.0	5.3	2.3	8.3	25.2	30.6	7.1	301
	18-20	14.0	6.0	3.0	5.6	3.0	4.0	6.0	1.3	10.3	13.0	33.9	6.4	301
	21-23	18.1	6.1	2.4	6.5	4.1	4.4	6.8	1.0	6.5	9.9	34.1	6.0	293
TOTALS		12.5	7.9	2.3	4.9	4.8	4.6	5.3	1.3	7.7	15.2	33.6	6.5	2372

USAFETAC FORM AA 64 0-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-70 PERIOD | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
FEB	00-02	32.2	5.0	3.3	7.4	4.5	2.5	3.3		5.8	8.3	27.7	4.8	242
	03-05	29.5	5.9	2.1	7.4	5.9	3.0	4.6	.8	4.2	10.1	26.6	4.9	237
	06-08	18.1	6.6	1.6	7.4	5.3	4.1	5.3	3.3	7.8	21.4	18.9	5.7	243
	09-11	17.4	10.0	1.2	3.7	2.9	2.5	5.8	2.9	7.5	20.3	25.7	6.0	241
	12-14	10.6	16.7		4.9	4.9	4.5	4.1	1.6	10.2	14.3	28.2	6.0	245
	15-17	10.1	13.3	1.2	4.0	6.9	4.4	5.2	2.8	6.9	16.1	29.0	6.2	248
	18-20	14.5	13.3	2.4	4.8	3.6	4.8	3.6	2.4	6.8	13.7	30.1	5.9	249
	21-23	24.1	5.0	3.3	10.0	4.6	2.9	2.9	1.2	3.3	10.8	32.0	5.4	241
TOTALS		19.6	9.5	1.9	6.2	4.8	3.6	4.4	1.9	6.6	14.4	27.3	5.6	1946

USAFETAC FORM JUL 64 0-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

3

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
67-70 — PERIOD
MAR — MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
MAR	00-02	20.7	6.5	1.6	7.7	6.5	4.1	4.5	.8	8.5	10.2	26.9	5.6	246
	03-05	18.1	7.7	3.2	6.0	3.6	3.2	6.9	1.6	10.5	11.7	27.4	5.8	248
	06-08	12.2	6.9	1.6	5.3	4.9	4.1	7.8	2.0	10.2	17.6	27.3	6.4	245
	09-11	15.4	6.1	1.2	2.8	5.3	5.7	5.7	4.5	8.1	18.3	26.8	6.3	246
	12-14	10.5	8.5	1.2	2.8	5.2	5.6	5.6	2.0	13.7	20.6	24.2	6.5	248
	15-17	6.5	10.6	.4	3.7	3.3	4.1	6.9	2.4	15.9	22.9	23.3	6.8	245
	18-20	14.2	8.1	1.6	8.1	6.9	3.6	8.1	2.4	9.7	13.0	24.3	5.8	247
	21-23	22.3	8.5	2.4	8.1	5.3	6.9	4.9	2.4	10.1	5.7	23.5	5.1	247
TOTALS		15.0	7.9	1.7	5.0	5.1	4.7	6.3	2.3	10.8	15.0	25.7	6.0	1972

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-70 (PERIOD) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
APR	00-02	25.1	14.6	5.0	6.3	7.9	5.4	5.4	1.3	7.5	7.5	13.8	4.1	239
	03-05	19.6	15.4	1.7	12.1	7.5	6.3	7.5	1.3	4.6	9.2	15.0	4.4	240
	06-08	20.5	10.0	.8	7.9	5.9	5.4	6.7	3.8	9.2	13.0	16.7	5.1	239
	09-11	12.2	12.2	.8	6.7	5.9	8.0	3.4	2.1	16.8	14.7	17.2	5.7	238
	12-14	6.3	11.3	2.1	4.2	10.5	8.8	4.2	3.4	13.0	17.2	18.9	6.1	238
	15-17	8.4	7.5	2.1	6.3	12.6	10.0	8.4	1.7	13.4	13.0	16.7	5.8	239
	18-20	13.4	13.0	2.9	15.9	7.9	7.9	4.6	1.7	10.9	9.6	12.1	4.7	239
	21-23	23.9	12.2	3.8	12.2	5.0	5.0	8.0	2.5	8.8	7.6	10.9	4.2	238
TOTALS		16.2	12.0	2.4	9.0	7.9	7.1	6.0	2.2	10.5	11.5	15.2	5.0	1910

USAF/ETAC FORM AWS 66 0-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-70 (PERIOD) MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
MAY	00-02	28.7	14.6	4.9	10.9	10.1	4.9	3.6	.8	3.6	0.5	11.3	5.5	247
	03-05	21.3	10.7	4.1	9.0	11.1	6.1	5.7	2.9	11.1	6.6	11.5	4.4	244
	06-08	14.6	11.0	2.4	9.3	10.2	8.9	6.9	3.3	8.1	11.0	14.2	5.0	246
	09-11	11.3	12.5	2.4	8.9	7.3	9.3	7.7	3.2	12.1	12.9	12.5	5.3	248
	12-14	6.5	11.3	4.4	8.5	8.9	8.9	10.1	3.2	12.5	12.5	13.3	5.5	248
	15-17	6.1	13.9	3.3	7.0	8.6	7.8	9.4	2.0	7.6	18.9	15.2	5.7	244
	18-20	9.3	12.1	2.8	8.9	9.7	5.1	9.7	4.0	9.3	13.4	14.6	5.4	247
	21-23	17.5	13.8	5.3	11.8	7.7	6.1	6.9	3.3	8.1	8.5	11.0	4.4	246
TOTALS		14.4	12.5	3.7	9.3	9.2	7.4	7.5	2.8	9.1	11.3	13.0	4.9	1970

USAFETAC FORM 0-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

3

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-70 (PERIOD) JUN. (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
JUN	00-02	36.7	17.9	2.1	7.1	10.4	7.9	6.3	2.1	4.2	2.9	2.5	2.6	240
	03-05	26.5	16.0	2.1	12.6	10.1	9.7	6.3	3.4	5.9	4.2	3.4	3.3	238
	06-08	22.9	13.3	1.7	8.8	11.7	13.8	10.8	.8	7.1	4.6	4.6	3.7	240
	09-11	20.9	15.9	2.9	12.1	13.0	9.6	7.1	1.3	9.2	7.1	.8	3.6	239
	12-14	14.3	23.1	3.8	14.7	9.2	10.1	6.7	1.7	7.1	7.6	1.7	3.6	238
	15-17	20.8	26.7	5.8	11.3	11.3	5.0	4.2	1.3	6.3	6.7	.8	2.9	240
	18-20	25.5	28.9	2.9	11.7	5.9	5.9	5.4		4.6	6.7	2.5	2.8	239
	21-23	41.7	15.4	1.7	11.3	9.2	6.3	4.2	.8	4.6	2.1	2.9	2.4	240
TOTALS		26.2	19.7	2.9	11.2	10.1	8.5	6.4	1.4	6.1	5.2	2.4	3.1	1914

USAFETAC FORM JUL 64 8-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 INCIRLIK AB TURKEY/ADANA 67-70 JUL
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS.
		0	1	2	3	4	5	6	7	8	9	10		
JUL	00-02	52.0	12.1	2.8	7.3	5.6	4.8	4.8	1.2	5.2	3.2	.8	2.0	248
	03-05	32.0	18.6	2.8	12.1	10.9	5.7	4.9	2.0	6.1	4.0	.8	2.7	247
	06-08	29.3	13.0	2.4	8.9	11.8	14.2	11.0	1.6	3.3	3.7	.8	3.1	246
	09-11	37.5	22.2	2.4	8.5	14.5	4.0	7.7	.4	1.6	.8	.4	2.0	248
	12-14	35.6	23.9	3.6	7.7	12.1	4.9	6.9	.4	2.8	1.2	.8	2.1	247
	15-17	47.6	28.6	1.2	9.7	4.0	1.6	1.6	1.2	2.8	1.2	.4	1.4	248
	18-20	54.3	23.7	1.6	4.9	4.9	2.4	1.6	.4	3.3	2.4	.4	1.4	245
	21-23	54.5	10.2	2.4	4.5	7.3	4.5	6.1	2.0	5.7	2.8		2.0	246
TOTALS		42.9	19.0	2.4	8.0	8.9	5.3	5.6	1.2	3.9	2.4	.6	2.1	1975

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 INCIRLIK AB TURKEY/ADANA 67-70 AUG
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
AUG	00-02	46.2	20.2	3.2	10.1	6.1	6.1	5.3		1.0	.8	.4	1.7	247
	03-05	33.9	33.5	3.7	7.3	8.2	4.9	3.7		3.3	1.6		1.8	245
	06-08	26.8	15.0	4.5	15.9	9.8	13.0	9.3	.8	4.1	.8		2.8	246
	09-11	29.3	20.7	4.1	13.0	12.2	11.8	5.1		2.8			2.3	246
	12-14	22.8	32.5	5.3	9.3	13.0	8.1	5.7		1.0	1.6		2.3	246
	15-17	41.1	30.5	2.0	14.6	4.1	4.1	.6		2.0	.4	.4	1.4	246
	18-20	50.6	25.7	2.9	8.2	3.7	2.9	3.7	.4	2.0			1.3	245
	21-23	52.6	13.8	2.0	7.7	8.5	5.3	3.2	.8	3.6	1.6	.8	1.8	247
TOTALS		37.9	24.0	3.5	10.8	8.2	7.0	4.7	.3	2.0	.9	.2	1.9	1968

USAFETAC FORM AWS 64 0-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 56-70 (PERIOD) SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
SEP	00-02	54.0	14.9	4.6	8.8	5.8	2.7	2.7	.9	2.4	1.8	1.2	1.6	328
	03-05	54.1	12.5	4.3	6.2	6.4	5.2	2.7	1.5	2.7	1.5	.9	1.7	329
	06-08	44.1	12.5	6.7	9.4	7.9	5.5	4.3	1.5	4.2	1.2	3.0	2.2	329
	09-11	36.4	15.2	3.9	10.6	12.1	8.2	3.6	.9	5.2	.9	2.7	2.5	330
	12-14	33.6	12.4	3.6	13.9	10.0	10.9	3.9	1.8	4.5	3.0	2.1	2.8	330
	15-17	37.4	18.7	2.5	7.7	8.0	6.4	4.9	4.0	5.8	3.7	.9	2.6	326
	18-20	51.7	17.6	2.4	7.6	5.8	2.7	3.3	2.1	3.0	2.4	1.2	1.8	329
	21-23	60.2	12.2	3.6	5.5	4.9	3.0	4.0	2.1	2.4	1.2	.9	1.5	329
TOTALS		46.4	14.5	4.0	9.0	7.6	5.6	3.7	1.9	3.8	2.0	1.6	2.1	2630

USAFETAC FORM AA 64 9-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 60-70 (PERIOD) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
OCT	00-02	47.0	14.6	2.1	6.8	6.3	6.0	1.8	1.2	5.1	3.6	5.7	2.4	336
	03-05	46.5	13.8	2.9	7.9	5.0	3.2	3.5	1.8	4.4	6.2	4.7	2.5	340
	06-08	27.1	14.4	3.2	9.1	6.5	8.2	5.9	3.5	8.2	6.8	7.1	3.7	340
	09-11	26.4	12.5	3.3	9.2	6.5	8.0	5.0	2.4	6.5	11.3	8.9	4.0	337
	12-14	22.8	9.5	2.7	6.8	8.9	8.3	6.2	3.6	10.4	11.2	9.8	4.6	338
	15-17	21.5	9.7	2.4	10.0	9.7	5.6	6.8	3.5	10.9	10.9	8.8	4.5	339
	18-20	34.8	11.2	4.1	8.3	6.5	6.6	5.6	3.5	4.4	5.3	9.4	3.4	339
	21-23	40.9	11.9	5.0	8.0	8.9	4.2	3.9	3.6	4.2	2.7	6.8	2.8	337
TOTALS		33.4	12.2	3.2	8.3	7.3	6.3	4.8	2.9	6.8	7.3	7.7	3.5	2706

USAFETAC FORM AIR 64 0-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

33308 INCIRLIK AB TURKEY/ADANA 66-7[illegible] [illegible]V
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
NOV	00-02	33.2	6.2	3.8	5.8	9.9	3.4	4.0	4.1	6.8	6.5	15.4	4.1	292
	03-05	34.2	11.1	4.7	4.4	3.7	2.7	4.4	4.0	10.1	7.0	13.6	4.0	298
	06-08	17.8	11.7	4.8	4.8	4.8	3.8	4.8	2.5	11.7	13.0	20.3	5.3	315
	09-11	18.4	9.4	2.9	3.2	5.2	5.2	5.5	2.6	10.3	15.2	22.3	5.6	310
	12-14	14.6	11.0	2.9	5.2	2.6	3.9	6.2	2.9	12.3	16.6	21.8	5.9	308
	15-17	14.9	9.4	4.5	6.2	6.2	5.5	8.8	3.6	11.7	12.0	17.2	5.4	308
	18-20	26.0	9.1	4.9	4.9	4.9	4.2	7.5	3.9	7.8	5.8	21.1	4.7	308
	21-23	32.7	4.0	2.0	6.9	6.3	2.3	8.0	1.7	7.6	7.0	20.5	4.6	303
TOTALS		24.0	9.0	3.8	5.2	5.5	3.9	6.3	3.2	9.8	10.5	19.1	5.0	2442

USAFETAC FORM JUL 64 0-9-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC


SKY COVER


33308 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
69-7[illegible] — PERIOD
[illegible]C — MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
DEC	00-02	21.0	3.6	2.2	3.6	6.7	2.9	.1	1.6	8.	12.7	27.4	5.6	314
	03-05	23.6	4.8	1.9	5.7	3.6	3.5	.3	1.6	10.2	14.6	26.4	5.7	314
	06-08	12.4	6.2	3.1	6.6	7.8	3.4	.4	3.7	12.1	14.3	26.1	6.2	322
	09-11	12.5	4.7	2.2	5.6	6.5	5.6	.3	2.8	7.1	13.7	30.3	6.4	321
	12-14	9.5	5.2	3.4	5.6	8.2	5.2	.7	2.1	12.2	14.3	27.4	6.4	328
	15-17	8.2	6.0	3.3	6.6	7.9	2.7	4.8	3.0	12.1	13.9	32.0	6.7	331
	18-20	15.3	8.6	3.7	4.6	3.1	2.3	.7	1.8	8.3	10.7	34.0	6.2	326
	21-23	18.9	5.3	3.7	7.1	4.6	2.5	.7	2.2	6.2	11.5	34.8	6.0	322
TOTALS		15.2	6.2	2.9	5.6	6.0	3.5	5.5	2.4	9.7	13.2	29.8	6.2	2578

AD-A082 415 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
INCIRLIK AB, ADANA, TURKEY. REVISED UNIFORM SUMMARY OF SURFACE --ETC(U)
MAR 77
UNCLASSIFIED USAFETAC/DS-80/023 NL

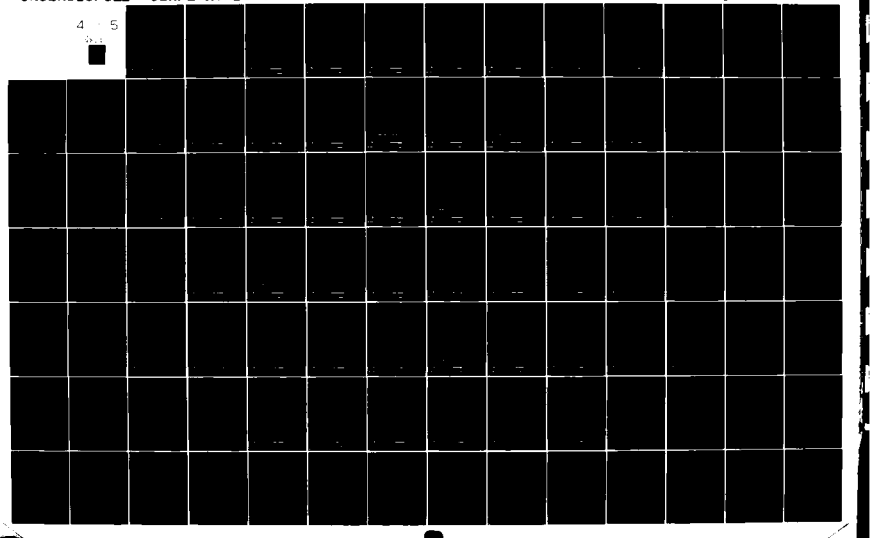

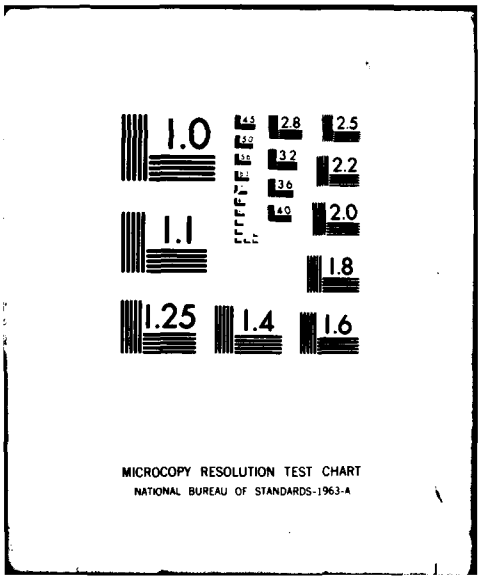
1.0
1.1
1.25
1.4
1.6
2.8
3.2
3.6
4.0
2.5
2.2
2.0
1.8
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART E PSYCHROMETRIC SUMMARIES

In this section are presented various summaries of dry- and wet-bulb temperatures, dew points, and relative humidity. The order and manner of presentations follows:

1. Cumulative percentage frequency of occurrence - derived from daily observations and presented by month and annual for all years combined. These tabulations provide the cumulative percentage frequency to tenths of temperature by 5-degree Fahrenheit increments, plus mean temperature, standard deviations, and total number of observations in three separate tables as follows:

   a. Daily maximum temperatures
   b. Daily minimum temperatures
   c. Daily mean temperatures

   NOTE: Beginning in January 1964, daily maximum and minimum temperatures are routinely selected from hourly observations recorded on surface observing forms or from automated data collections for all Air Force operated stations. For those stations observing less than 24 hours per day, and where maximum and minimum temperatures are required but not recorded, these are also selected from hourly data from as early as January 1949 and later. Please refer to notations on summary pages and Station History for further information on reporting practices of individual stations.

2. Extreme values - derived from daily observations with the extreme value selected for each year and month of record available. An annual (ALL MONTHS) value is selected when all months for a year have valid extremes. Means and standard deviations are computed for months and annual when four or more values are present for any column. Two tables of daily extremes are prepared:

   a. Extreme maximum temperature
   b. Extreme minimum temperature

   NOTE: The following symbols are used in the extreme data blocks:

   (1) * indicates the extreme was selected from a month with one or more days missing.

   (2) # indicates the extreme was selected from a month in which hourly temperatures were available for less than 24 hours for at least one day in the month.

Continued on Reverse

3. Bivariate percentage frequency distribution and computations of dry-bulb versus wet-bulb temperature. This tabulation is derived from hourly observations and is presented by month and annual, all hours and years combined. The following information is provided:

   a. The main body of the summary consists of a bivariate percentage frequency distribution of wet-bulb depression in 17 classes spread horizontally; by 2-degree intervals of dry-bulb temperature spread vertically. Also provided for each of the dry-bulb intervals is the percentage of observations with dry-bulb and wet-bulb temperature combined; and again for dry-bulb, wet-bulb, and dew-point temperatures separately. Total observations for these four items is also provided in two lines at end of each tabulation table, which may be continued on several pages.

      NOTE: A percentage frequency in this table of ".0" represents one or more occurrences amounting to less than .05 percent.

   b. Statistical data for the individual elements of relative humidity, dry-bulb, wet-bulb, and dew-point temperatures are shown in the section at the bottom left of the forms. These consist of the sum of squares (ΣX^2), sums of values (ΣX), means ($\bar{X}$), and standard deviations (σ_x). The number of observations used in the computation for each element is also shown.

   c. At the lower right of the form are given the mean number of hours of occurrence for six ranges of dry-bulb, wet-bulb, and dew-point temperatures, and total number of hours possible in the period represented. Mean number of hours is shown to tenths and indicates mean number of hours per year in the annual summary, or mean number of hours per month in the tabulation by month.

      NOTE: Wet-bulb temperature usually was not reported prior to 1946. Relative humidity usually was not reported prior to 1949, nor subsequent to June 1958; and was computed by machine methods for observations recorded during these periods. All values of dew-point temperature and relative humidity are with respect to water, unless otherwise indicated.

4. Means and standard deviations - These tabulations are derived from hourly observations and present the mean, standard deviation, and total number of observations for the eight standard 3-hour groups, by month and annual and again at the bottom for all hours combined. Records for all years combined are presented in the following three tables; DRY-BULB TEMPERATURE, WET-BULB TEMPERATURE, and DEW-POINT TEMPERATURE.

5. Cumulative percentage frequency of occurrence of relative humidity - This summary is derived from hourly observations and presents the cumulative percentage frequency of occurrence of relative humidity by increments of 10% classes, plus the mean relative humidity and total number of observations in two tables.

   a. Table 1 is prepared by month and annual, all years combined, with month being the vertical argument.

   b. Table 2 is prepared by month by standard 3-hour groups, with the hour groups being the vertical argument and a separate page for each month. All years are also combined for this summary.

74-20000

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY TEMPERATURES

33308 INCIRLIK AB TURKEY/ADANA 55-68
STATION STATION NAME YEARS

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM DAILY OBSERVATIONS)

MAXIMUM

TEMP (°F)	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ANNUAL
≥ 110								1.4					.1
≥ 105						1.0	.9	3.0					.4
≥ 100					.7	4.3	6.0	13.4	3.1	.5			2.4
≥ 95				.3	6.7	16.0	30.2	49.5	14.5	3.5			10.6
≥ 90				1.3	15.7	46.7	85.7	94.0	59.8	16.1	1.0		28.0
≥ 85				6.9	33.2	82.1	99.8	99.8	91.0	45.6	4.9		40.4
≥ 80			3.0	20.1	58.8	95.7	100.0	100.0	99.5	73.3	20.0	.2	49.6
≥ 75		1.1	10.4	41.1	78.6	99.5			99.8	90.8	44.9	1.7	57.7
≥ 70	.5	8.4	24.3	70.2	94.0	100.0			100.0	97.0	67.4	9.7	66.1
≥ 65	9.1	20.9	53.1	93.8	98.8					99.3	84.9	30.0	75.7
≥ 60	40.6	46.7	82.6	98.7	99.8					100.0	93.8	60.8	86.2
≥ 55	74.9	77.4	96.3	99.5	100.0						98.7	88.8	95.0
≥ 50	93.6	92.7	99.5	100.0							100.0	97.3	98.7
≥ 45	97.6	99.2	100.0									99.5	99.7
≥ 40	99.7	100.0										100.0	100.0
≥ 35	100.0												100.0
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
MEAN	57.0	59.2	65.4	73.5	81.3	89.2	93.2	95.0	90.2	83.2	72.8	61.3	76.8
S.D.	9.364	8.729	6.612	6.910	5.080	3.676	3.711	4.373	4.441	6.626	7.720	5.992	14.421
TOTAL OBS.	374	368	403	389	434	420	434	434	420	434	390	403	4903

USAFETAC FORM 0-21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY TEMPERATURES

33308 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
55-68 — YEARS

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM DAILY OBSERVATIONS)

MINIMUM

TEMP (°F)	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ANNUAL
≥ 80							.5	1.8					.2
≥ 75						.7	15.4	22.8	1.2				3.6
≥ 70					.2	15.0	73.7	80.9	21.8	2.1			17.0
≥ 65		.3		1.0	7.8	62.4	97.2	98.8	68.4	15.7	1.0		30.8
≥ 60		.5	2.2	5.4	39.4	94.8	99.8	100.0	94.7	55.3	13.1	.2	44.0
≥ 55	1.1	1.6	9.7	32.4	80.6	100.0	100.0		100.0	85.0	39.2	4.2	56.5
≥ 50	13.1	16.6	34.7	75.8	98.2					96.3	67.7	29.5	71.0
≥ 45	40.1	43.7	64.5	96.7	99.8					98.4	84.1	62.8	83.5
≥ 40	66.6	66.0	84.1	99.2	100.0					100.0	94.1	84.1	91.8
≥ 35	84.8	86.7	97.0	100.0							99.0	94.3	97.0
≥ 33	88.2	91.0	98.8								100.0	98.3	98.2
≥ 30	96.3	98.1	99.5									99.3	99.5
≥ 25	98.9	100.0	100.0									100.0	99.9
≥ 20	99.5												100.0
≥ 15	100.0												100.0
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
MEAN	41.9	42.5	48.8	52.4	58.3	65.7	71.2	72.2	66.3	59.6	51.9	45.6	56.2
S. D.	8.990	8.702	8.434	6.863	4.327	3.748	3.324	3.253	3.986	5.222	6.989	5.995	11.695
TOTAL OBS.	374	368	403	389	434	420	434	434	418	434	390	403	4901

USAFETAC FORM AIR 64 0-21-3 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

DAILY TEMPERATURES

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 55-68 (YEARS)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM DAILY OBSERVATIONS)

MEAN

TEMP (°F)	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ANNUAL
≥ 95								.2					.0
≥ 90						.?	1.2	2.3	.2				.3
≥ 85						4.0	18.0	38.0	3.6	.7			5.7
≥ 80				.3	5.1	32.9	90.6	93.8	39.7	4.8			23.4
≥ 75				1.3	22.4	81.0	99.3	100.0	88.5	30.0	1.8		37.0
≥ 70		.5	1.7	10.8	54.1	97.4	100.0		99.3	66.1	14.6		47.4
≥ 65		1.1	8.9	37.5	84.6	100.0			100.0	91.9	45.4	1.5	58.0
≥ 60	2.9	7.6	26.8	78.7	96.5					97.7	70.5	12.2	67.9
≥ 55	19.5	30.7	61.0	96.9	100.0					99.8	86.2	45.4	79.6
≥ 50	59.1	59.2	87.1	99.2						100.0	95.9	80.9	90.8
≥ 45	83.2	85.1	98.0	99.7							99.5	95.8	97.0
≥ 40	97.3	97.6	99.8	100.0							100.0	99.0	99.5
≥ 35	99.5	100.0	100.0									100.0	100.0
≥ 30	99.7												100.0
≥ 25	100.0												100.0
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
≥													
MEAN	50.0	51.1	58.3	63.2	70.0	77.7	82.3	83.8	78.3	71.6	62.6	53.7	66.8
S.D.	9.472	8.038	5.890	5.037	5.380	4.022	2.621	2.748	3.478	5.287	6.839	5.127	12.739
TOTAL OBS.	374	389	403	389	434	420	434	434	418	434	390	403	4901

USAFETAC FORM JUL 68 0-21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF/ETAC/OL A
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MAXIMUM TEMPERATURE

(FROM DAILY OBSERVATIONS)

33308 INCIRLIK AB TURKEY/ADANA 55-68
STATION STATION NAME YEARS

WHOLE DEGREES FAHRENHEIT

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
55					92	105	100	99	96	97	86	70	
56	68	74	68	83	90	105	107	111	104	96	83	80	111
57	63	71	81	95	99	100	106	105	97	102	80	70	106
58	65	76	80	88	100	108	103	114	99	92	84	70	114
59	68	60	80	88	93	102	95	100	95	89	89	72	102
60	68	71	78	83	101	101	102	103	103	94	85	74	103
61	64	66	75	86	98	92	103	101	94	94	83	75	103
62	70	65	84	85	98	106	98	110	103	99	88	78	110
63	68	70	76	81	83	100	97	102	97	96	81	72	102
64	61	66	80	87	102	99	101	103	97	94	85	71	103
65	66	67	82	89	94	99	99	97	94	95	79	70	99
66	71	79	84#	90	89	104	100	98	97	95	90	70	104
67	* 52	68	70	83	91	97	105	102	94	88	78	74	105
68	62	70	74	92	95	97	104	97	101	94			
MEAN	65.1	69.5	77.8	86.9	94.6	100.9	101.4	103.0	97.9	94.6	83.9	72.8	105.2
S.D.	4.974	5.010	5.016	4.010	5.387	4.141	3.502	5.306	3.518	3.586	3.774	3.295	4.266
TOTAL OBS.	378	268	403	389	434	420	434	434	420	434	390	403	4903

NOTES # (BASED ON < FULL MONTHS)
(AT LEAST ONE DAY < 24 OBS)

USAF ETAC FORM 0-0004 (OL-A)

DATA PROCESSING BRANCH
USAF/ETAC/OL A
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MINIMUM TEMPERATURE

(FROM DAILY OBSERVATIONS)

33308 INCIRLIK AB TURKEY/ADANA 55-68
STATION STATION NAME YEARS

WHOLE DEGREES FAHRENHEIT

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
55					48	61	68	64*	60	57	42	34	
56	27	35	35	35	52	59	64	66	57	47	34	30	27
57	31	34	39	42	52	60	61	70	62	53	39	35	31
58	32	30	38	45	50	57	59	67	58	48	39	38	30
59	37	29	30	42	50	58	64	64	57	50	35	39	29
60	30	29	37	47	54	56	66	62	59	52	45	40	29
61	29	25	29	42	52	61	68	69	56	53	33	36	25
62	36	31	39	47	54	57	63	68	63	51	48	44	31
63	40	37	29	45	49	59	64	66	62	47	43	25	25
64	17	33	40	45	45	60	65	64	58	49	36	34	17
65	30	35	35	36	44	58	64	66	58	41	40	33	30
66	35	42	39*	48	48	58	64	72	62	58	49	37	35
67	* 30	29	36	42	55	57	67	69	59	55	34	29	29
68	28	32	34	46	53	59	64	64	57	52			
MEAN	30.9	32.4	35.4	43.2	50.4	58.6	64.4	66.5	59.1	50.9	39.8	34.9	28.2
S.D.	5.678	4.350	3.906	4.029	3.245	1.595	2.468	2.822	2.282	4.446	5.372	5.024	4.448
TOTAL OBS.	374	368	403	389	434	420	434	434	418	434	390	403	4901

NOTES * (BASED ON < FULL MONTHS)
(AT LEAST ONE DAY < 24 OBS)

USAF ETAC FORM 0-0-0 (OLA)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | ALL MONTH

PAGE 1 | ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
108/107																	.0	2	2		
106/105																.0	.0	3	3		
104/103														.0	.0		.0	26	26		
102/101													.0	.0	.0	.0	.1	54	54		
100/ 99										.0	.0	.0	.0	.0	.0	.0	.1	103	104		
98/ 97										.0	.0	.0	.0	.0	.0	.0	.1	184	185		
96/ 95								.0	.0	.0	.1	.1	.1	.1	.1	.0	.1	466	466		
94/ 93							.0	.0	.1	.2	.1	.1	.1	.1	.1	.1	.1	768	770		
92/ 91						.0	.0	.2	.3	.4	.2	.2	.1	.1	.1	.1	.0	1249	1252		
90/ 89						.0	.0	.6	.4	.3	.3	.1	.1	.1	.1	.0	.0	1792	1799		
88/ 87			.0		.0	.1	.5	.6	.4	.2	.2	.2	.1	.1	.1	.0		1966	1975		
86/ 85	.0			.0	.0	.4	.8	.6	.4	.3	.2	.2	.1	.1	.0	.0		2653	2659	3	1
84/ 83	.0		.0	.1	.1	.4	.5	.5	.3	.3	.2	.2	.1	.0	.0	.0		2083	2088	2	4
82/ 81			.1	.4	.4	.6	.4	.5	.3	.2	.2	.1	.1	.0	.0			2511	2517	7	
80/ 79		.0	.3	.6	.5	.5	.4	.3	.2	.2	.2	.1	.0	.0	.0			2665	2670	90	
78/ 77		.2	.9	.9	.6	.5	.5	.4	.3	.2	.2	.1	.0	.0	.0			3927	3935	794	14
76/ 75	.0	.2	1.0	.7	.5	.4	.4	.3	.2	.2	.2	.1	.0	.0				3326	3331	2923	280
74/ 73	.0	.2	.9	.6	.5	.3	.3	.3	.3	.2	.1	.0	.0	.0				3035	3038	4374	1180
72/ 71	.0	.5	1.1	.4	.7	.3	.4	.3	.2	.1	.1	.0	.0	.0				3218	3227	4320	2481
70/ 69	.0	.6	.8	.5	.5	.4	.4	.2	.2	.1	.0	.0	.0					2999	3008	4512	3400
68/ 67	.1	.6	1.2	.8	.6	.6	.4	.3	.2	.2	.1	.0						3988	3999	4261	4517
66/ 65	.0	.7	.8	.5	.5	.3	.4	.2	.2	.1	.0	.0						2973	2985	4032	3323
64/ 63	.0	.8	.8	.7	.5	.6	.4	.3	.1	.1	.0							3498	3509	4278	3697
62/ 61	.1	.9	.7	.7	.5	.4	.3	.2	.1	.1	.0							3228	3234	4149	3862
60/ 59	.1	1.3	1.0	.9	.6	.5	.4	.3	.2	.0	.0							4174	4180	4116	4293
58/ 57	.1	1.1	.8	.6	.5	.4	.2	.2	.1	.0	.0							3311	3326	4298	3913
56/ 55	.1	1.1	.7	.6	.4	.3	.3	.2	.0	.0								3040	3045	4167	3642
54/ 53	.2	1.4	1.1	.7	.4	.3	.3	.1	.0									3559	3568	4139	3680
52/ 51	.1	1.2	.9	.4	.4	.2	.2	.0	.0									2785	2795	3896	3818
50/ 49	.3	1.9	1.2	.7	.5	.4	.2	.1	.0									4195	4207	4470	5003
48/ 47	.2	1.2	.7	.4	.4	.3	.1	.0	.0									2615	2620	4100	3884
46/ 45	.2	1.2	.8	.4	.3	.3	.1	.0										2322	2329	3685	4455
44/ 43	.1	.9	.4	.3	.2	.1	.0	.0										1625	1632	2807	3536
42/ 41	.1	.6	.7	.4	.2	.1	.0											1827	1831	2463	3719

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 80 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 783-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — ALL MONTH

 — ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
40/ 39	.0	.3	.5	.3	.2	.0												1138	1144	1807	2478
38/ 37	.0	.2	.3	.3	.1	.0												769	772	1723	2198
36/ 35	.0	.2	.3	.2	.1	.0												641	642	1438	1937
34/ 33	.0	.1	.2	.1	.0													344	344	1123	1713
32/ 31	.0	.1	.1	.1	.0													206	206	701	2173
30/ 29		.0	.0	.0	.0													64	64	391	1432
28/ 27	.0	.0	.0	.0														18	18	199	1241
26/ 25		.0	.0															8	8	103	1024
24/ 23		.0																2	3	33	1056
22/ 21																				8	693
20/ 19																					509
18/ 17																					390
16/ 15																					291
14/ 13																					238
12/ 11																					140
10/ 9																					107
8/ 7																					55
6/ 5																					57
4/ 3																					26
2/ 1																					21
0/ -1																					7
-2/ -3																					2
-4/ -5																					4
-6/ -7																					2
-10/-11																					1
TOTAL	1.9	17.8	18.2	13.6	10.5	8.9	7.9	6.7	4.6	3.4	2.2	1.5	1.1	.8	.3	.3	.4	79370		79358	
																		79358		79390	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	[illegible]	[illegible]	[illegible]	[illegible]	79359							
Dry Bulb	[illegible]	[illegible]	[illegible]	[illegible]	79370		32.4	148.4	2028.8	1690.6	188.2	8760
Wet Bulb	[illegible]	[illegible]	[illegible]	[illegible]	79358		139.2	2426.1	949.2	3.8		8760
Dew Point	[illegible]	[illegible]	[illegible]	[illegible]	79358	1.8	1023.2	3369.8	178.2	.2		8760

USAFETAC FORM 0-26-5 (OL A) 84 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JAN MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
80/ 79													.0					1	1		
78/ 77												.0	.0					5	5		
76/ 75											.0	.1						8	8		
74/ 73											.1							5	5		
72/ 71									.0	.1	.1							11	11		
70/ 69							.0	.1	.0	.0	.0							14	14		
68/ 67						.0	.1	.1	.1	.1	.0	.0						32	32		
66/ 65					.0	.0	.3	.1	.3	.1	.1	.0						66	66		
64/ 63				.1	.1	.4	.4	.3	.3	.3	.1							134	134		
62/ 61			.0	.2	.4	.4	.2	.3	.2	.2	.0							148	148		
60/ 59			.2	.4	.8	.8	.6	.7	.5	.1								299	300		
58/ 57		.1	.5	.5	1.0	.9	.7	.7	.3	.1								330	331	20	
56/ 55		.5	.6	.7	.9	.9	.8	.5	.2	.0								350	350	98	5
54/ 53	.1	.8	1.1	1.8	1.1	1.0	.7	.4	.1									502	506	209	39
52/ 51	.1	1.2	1.7	1.1	1.0	.6	.6	.2	.0									449	450	291	96
50/ 49	.2	2.9	3.1	1.7	1.5	1.4	.6	.4	.1									823	823	540	201
48/ 47	.3	3.5	2.2	1.0	1.1	.9	.4	.1	.0									662	662	765	247
46/ 45	.3	4.0	2.1	1.4	.9	1.1	.3	.2										709	713	878	578
44/ 43	.2	2.5	1.1	1.7	1.0	.4	.2	.0										497	498	767	512
42/ 41	.4	2.5	2.8	1.7	1.1	.6	.0											648	649	690	617
40/ 39	.0	1.5	2.5	1.2	.7	.2												427	431	539	494
38/ 37	.0	1.0	1.4	1.1	.4	.1												292	294	619	433
36/ 35	.0	1.1	1.7	1.0	.4	.1												297	297	510	362
34/ 33	.1	.6	.9	.6	.1													160	160	429	415
32/ 31	.0	.3	.4	.2	.1													74	74	302	614
30/ 29		.1	.1	.1	.0													23	23	187	496
28/ 27	.0		.1	.0														9	9	84	371
26/ 25		.0	.1															5	5	33	324
24/ 23		.0																2	2	13	331
22/ 21																				6	234
20/ 19																					176
18/ 17																					128
16/ 15																					91
14/ 13																					94

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
12/ 11																					62
10/ 9																					47
8/ 7																					22
6/ 5																					31
4/ 3																					5
2/ 1																					5
0/ -1																					4
-2/ -3																					1
-4/ -5																					3
-6/ -7																					3
-10/-11																					1
TOTAL	1.9	22.7	22.6	16.4	12.7	9.9	5.9	4.1	2.1	1.1	.4	.2	.0					6982	7001	6982	6982

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 47 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	20898157	440722	63.1	21.000	6982							
Dry Bulb	10441262	334582	47.8	8.030	7001		12.0	8.1	2.0			744
Wet Bulb	12620886	293364	42.0	6.622	6982		66.8					744
Dew Point	8882331	238898	34.2	10.074	6982	1.8	317.9					744

USAFETAC FORM AS 34 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PAGE 1 | ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
72/ 71							.0		.0	.1								7	7		
70/ 69					.0	.0	.1	.0	.0	.1	.0							23	23		
68/ 67					.0	.1	.2	.2	.1	.2	.0							47	48		
66/ 65			.0	.0	.0	.2	.5	.2	.2	.1	.0							82	83		
64/ 63			.0	.3	.3	.6	.6	.3	.2	.1	.0							148	149		
62/ 61		.1	.2	.4	.4	.6	.6	.3	.3	.1	.0							197	197	2	
60/ 59		.2	.4	.9	.9	1.2	1.2	.6	.7	.1	.0							373	373	20	
58/ 57		.5	.5	.7	1.0	1.3	.6	.7	.2									333	335	67	8
56/ 55	.0	.8	.7	.9	.9	.9	.9	.6	.0									351	351	142	35
54/ 53	.1	1.9	1.6	1.1	1.4	1.0	1.0	.3	.0									508	509	290	87
52/ 51	.1	1.5	1.4	1.1	1.0	.6	.7	.1	.0									401	403	376	151
50/ 49	.5	3.8	2.8	1.8	1.7	.9	.7	.2										758	759	578	315
48/ 47	.7	3.4	1.6	1.2	1.3	1.1	.4	.2										602	603	692	333
46/ 45	.5	3.7	1.6	1.1	1.0	.9	.3											556	557	749	478
44/ 43	.2	1.9	1.2	1.2	.7	.7	.1											368	369	662	443
42/ 41	.5	1.9	1.8	1.4	1.2	.3	.1											435	436	567	531
40/ 39	.1	1.0	1.7	1.0	1.0	.2												308	308	398	385
38/ 37	.0	.9	1.2	1.1	.5	.2												239	239	393	398
36/ 35		.9	1.4	.6	.1	.0												181	181	402	359
34/ 33		.3	.5	.4	.1													80	80	323	347
32/ 31	.1	.1	.4	.3	.2													71	71	218	416
30/ 29		.1	.2	.2	.0													30	30	108	297
28/ 27		.0	.0															5	5	60	269
26/ 25		.0																3	3	44	258
24/ 23																				15	284
22/ 21																					210
20/ 19																					133
18/ 17																					113
16/ 15																					78
14/ 13																					67
12/ 11																					22
10/ 9																					27
8/ 7																					12
6/ 5																					14

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AUG 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33808 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PAGE 2 | ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
4/ 3																					19
2/ 1																					13
0/ -1																					2
TOTAL	2	823	119	215	813	910	7	7	9	4	0	1	8	8	1			6119		6106	
																		6106		6106	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	27382813	388072	63.4	21.102	6106							
Dry Bulb	18186260	300614	49.1	8.062	6119		12.0	8.6				672
Wet Bulb	11749700	266458	43.2	6.900	6106		49.0					672
Dew Point	8469639	218271	35.7	10.453	6106	.2	248.1					672

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAR (MONTH)

PAGE 1 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
84/ 83											.0							1	1		
82/ 81									.0	.0	.1	.0						11	11		
80/ 79									.0	.0	.0	.0	.0		.0			7	7		
78/ 77								.0	.1	.1	.1	.0	.0		.0			30	30		
76/ 75						.0	.0	.2	.2	.2	.1	.1	.1	.0				72	72		
74/ 73						.1	.1	.2	.2	.1	.1	.0	.0	.0				70	70		
72/ 71				.0	.2	.1	.4	.2	.3	.2	.3	.1	.0					108	109		
70/ 69				.0	.2	.4	.3	.2	.5	.3	.2	.1						157	158		
68/ 67			.1	.2	.7	1.1	1.0	.7	.4	.5	.2	.0						320	320		
66/ 65		.0	.1	.4	1.1	.9	.9	.3	.3	.1	.1							286	286	4	
64/ 63		.1	.4	.8	1.3	1.6	.9	.7	.4	.2	.1							417	419	45	1
62/ 61	.0	.4	.7	1.4	1.5	.9	.6	.3	.2	.1	.0							406	409	120	14
60/ 59	.0	.7	1.7	2.7	1.2	.7	.8	.5	.3	.1								566	567	252	35
58/ 57	.1	1.4	1.9	1.7	1.0	.6	.5	.3	.1	.0								501	503	398	113
56/ 55	.2	1.8	2.1	1.6	.7	.5	.5	.2	.0									498	500	615	172
54/ 53	.7	2.6	3.2	1.2	.6	.5	.4	.1										601	601	839	333
52/ 51	.4	2.8	2.7	.8	.6	.3	.2	.0										514	516	790	481
50/ 49	.8	4.8	2.0	.9	.4	.5	.4	.0										642	645	871	872
48/ 47	.4	3.0	1.2	.6	.4	.3	.1	.0										390	391	756	795
46/ 45	.5	2.6	.7	.8	.2	.2	.0											331	332	551	743
44/ 43	.3	1.8	.6	.5	.2	.1	.0											222	226	409	537
42/ 41	.5	1.2	.7	.4	.1	.1												194	198	305	546
40/ 39	.1	.7	.5	.2	.1	.0												103	104	237	326
38/ 37	.0	.2	.4	.0	.1	.0												48	49	154	251
36/ 35	.0	.2	.2	.0	.1													33	34	97	272
34/ 33	.1	.0	.0	.0	.1													14	14	54	215
32/ 31		.0		.0	.0													4	4	25	230
30/ 29																				12	155
28/ 27																				6	115
26/ 25																				6	78
24/ 23																					95
22/ 21																					38
20/ 19																					37
18/ 17																					20

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AK 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

ATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — MAR MONTH

PAGE 2 — ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
16/ 15																					33
14/ 13																					22
12/ 11																					5
10/ 9																					7
8/ 7																					2
6/ 5																					2
-4/ -5																					1
TOTAL	4.0	24.4	19.2	14.5	10.7	8.7	7.1	4.4	3.1	1.9	1.3	.4	.2	.1	.0			6575			6546
																	6546		6546		

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	[illegible]	440422	67.3	21.232	6546							
Dry Bulb	[illegible]	305860	59.0	8.487	6575		.3	88.0	21.0	1.7		744
Wet Bulb	[illegible]	314484	49.0	9.305	6546		5.0					744
Dew Point	[illegible]	238732	43.3	8.715	6546	.1	98.3					744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — APR MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
96/ 95														.0		.0		3	3		
94/ 93													.1		.0	.0		7	7		
92/ 91												.0	.0	.0		.0		8	8		
90/ 89										.0	.0	.0	.2	.0	.0			19	19		
88/ 87										.0	.1	.2	.2	.0				27	27		
86/ 85								.0	.0	.2	.2	.3	.1	.1	.0			57	60		
84/ 83								.0	.1	.4	.3	.2	.1	.1				73	73		
82/ 81								.2	.4	.4	.3	.2	.1	.0				106	106		
80/ 79							.1	.2	.3	.4	.3	.1	.0					90	90		
78/ 77					.0	.1	.4	.6	.6	.6	.3	.1	.0					169	170		
76/ 75						.2	.6	.5	.6	.3	.2	.0						149	150		
74/ 73				.0	.2	.6	.8	.8	.5	.3	.1	.0						208	208		
72/ 71			.0		.8	.9	1.3	1.0	.3	.1								272	272	7	
70/ 69			.0	.2	.9	1.3	1.4	.4	.2	.1	.0	.0						297	298	24	
68/ 67			.4	1.2	2.2	2.2	1.4	.5	.3	.1	.0							524	525	70	
66/ 65		.1	1.0	1.7	1.5	.9	.6	.2	.2									405	406	172	1
64/ 63		.7	1.5	2.2	1.3	1.1	.4	.3	.1	.0								481	482	340	15
62/ 61	.0	1.8	2.0	2.2	1.1	.4	.2	.1		.0								496	496	603	84
60/ 59	.3	3.6	2.6	2.0	.7	.3	.0	.1										609	611	848	340
58/ 57	.3	4.0	2.1	.9	.4	.2	.1	.0										507	509	1004	499
56/ 55	.5	3.8	2.0	.5	.2	.0		.0										445	445	856	738
54/ 53	.8	4.0	1.9	.4	.1	.0	.0	.0										457	459	736	811
52/ 51	.6	3.0	.8	.1	.1		.0											295	297	586	867
50/ 49	.6	3.9	.9	.1	.1	.0	.0											354	357	518	1048
48/ 47	.3	1.5	.2	.1	.0	.0												139	140	287	627
46/ 45	.2	.9	.1	.1	.0	.0												78	78	151	485
44/ 43	.0	.3	.0															27	27	60	264
42/ 41	.0	.1	.0	.0														15	15	35	220
40/ 39																				11	102
38/ 37		.0																2	2	7	61
36/ 35																				6	52
34/ 33																					40
32/ 31																					26
30/ 29																					9

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 80 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

32308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
28/ 27																						11
26/ 25																						4
24/ 23																						11
22/ 21																						2
20/ 19																						2
TOTAL	3.8	27.9	15.5	11.9	9.6	8.3	7.4	5.0	3.0	2.9	1.9	1.2	.8	.3	.1	.0			6319	6340	6319	6319

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	32041313	427899	69.2	20.919	6219							
Dry Bulb	28276384	398820	62.4	9.420	6340			228.9	104.6	38.0	1.1	720
Wet Bulb	19902119	359028	58.9	8.332	6219			11.9				720
Dew Point	16418202	312969	50.6	8.358	6319		7.4					720

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
102/101																.0		1	1		
100/ 99															.0	.0	.1	8	8		
98/ 97													.0	.0		.0	.1	12	12		
96/ 95												.0	.0	.0	.1	.1	.1	26	26		
94/ 93											.0	.0	.1	.2	.0	.1	.1	35	36		
92/ 91										.0	.1	.2	.1	.3	.1	.0	.0	56	56		
90/ 89							.0	.0	.0	.1	.2	.3	.4	.2	.1	.0		92	92		
88/ 87								.0	.1	.1	.3	.4	.2	.1	.0			100	100		
86/ 85						.0	.1	.2	.4	.7	.9	.4	.2	.1	.0			191	192		
84/ 83						.1	.2	.6	.7	.7	.5	.2	.1	.1				190	191		
82/ 81						.2	.3	1.1	1.0	.7	.3	.1	.1	.0	.0			242	242		
80/ 79			.0		.0	.6	1.0	1.2	.9	.3	.2	.1	.0					274	275		
78/ 77			.0		.4	1.2	2.4	2.0	.8	.3	.0	.0	.0					454	455	2	
76/ 75				.1	1.0	1.8	1.8	.7	.3	.2	.0							377	377	5	
74/ 73			.0	.4	1.4	1.8	1.2	.5	.3	.1	.0							360	361	23	4
72/ 71			.5	.9	2.5	1.1	.8	.2	.1									385	386	82	
70/ 69		.3	1.4	1.9	1.9	.7	.2	.2	.1	.0								423	424	267	2
68/ 67	.0	.8	3.1	2.7	1.3	.3	.1	.1	.0	.0								529	530	626	42
66/ 65	.1	2.1	2.7	1.2	.4	.2	.2		.0									429	430	933	168
64/ 63	.2	3.4	2.3	.9	.3	.2	.0											469	471	1108	497
62/ 61	.4	4.3	1.9	.5	.1	.1	.0		.0									433	434	978	718
60/ 59	.9	5.2	1.8	.3	.1	.1	.0	.0										529	529	779	1249
58/ 57	.7	3.4	.4	.1	.1		.0											299	300	566	1006
56/ 55	.5	2.1	.2	.2	.1													191	192	416	864
54/ 53	.3	1.2	.3	.1														124	125	216	615
52/ 51	.1	.4	.0		.0													39	39	103	401
50/ 49	.1	.1																18	18	71	261
48/ 47																				13	138
46/ 45																					98
44/ 43																				1	73
42/ 41																					59
40/ 39																					29
38/ 37																					14
36/ 35																					18

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) 78 44 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1978/757-001/00

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAY MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
34/ 33																					20
32/ 31																					6
30/ 29																					2
28/ 27																					1
26/ 25																					1
TOTAL	3.4	23.4	14.3	9.5	9.6	8.3	8.5	6.8	4.6	3.4	2.8	1.9	1.3	1.0	.5	.3	.4		6302		6286
																		6286		6286	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	[illegible]	[illegible]	67.1	21.961	6286							
Dry Bulb	[illegible]	[illegible]	69.9	9.673	6302			444.4	280.2	124.9	9.8	744
Wet Bulb	[illegible]	[illegible]	61.6	6.864	6286			119.2	3.8			744
Dew Point	[illegible]	[illegible]	54.7	8.453	6286		1.2	3.7	.3			744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 / 626-010

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
108/107																	.0		2	2		
106/105																	.0		2	2		
104/103																	.1		7	7		
102/101													.0				.1		8	8		
100/ 99																.0	.1		11	11		
98/ 97												.0	.0	.2	.1	.1	.1		28	28		
96/ 95												.1	.2	.3	.4	.1	.1		75	75		
94/ 93										.0	.2	.1	.4	.4	.2	.2	.2		108	108		
92/ 91								.0	.2	.5	.5	.5	.4	.3	.1	.1	.1		170	170		
90/ 89								.5	.8	1.0	1.2	.4	.3	.1	.2	.1			280	281		
88/ 87							.3	.9	1.2	.7	.5	.5	.1	.1	.2				284	286		
86/ 85					.0	.2	1.6	2.0	1.2	1.0	.4	.3	.1	.1	.1	.0			443	443		
84/ 83					.0	.4	1.6	1.9	1.0	.5	.3	.1	.2	.0					368	368		
82/ 81					.2	1.3	1.6	2.1	.7	.2	.1	.1	.0						408	408		
80/ 79			.0	.4	1.4	1.8	1.0	.9	.4	.2	.1	.2	.0						398	398		
78/ 77		.0	.5	1.5	2.1	1.5	1.2	.6	.4	.2	.1	.1							519	521	13	
76/ 75		.1	1.5	1.7	2.0	.9	.6	.2	.2	.2	.1	.0							468	468	101	
74/ 73	.0	.4	2.1	2.0	1.1	.4	.3	.2	.1	.1	.1								433	433	506	7
72/ 71		1.1	3.6	.9	1.0	.3	.2	.1	.1	.0									456	458	873	108
70/ 69	.1	2.6	2.8	1.0	.5	.1	.1	.0	.0	.1									458	458	1208	360
68/ 67	.2	3.2	3.0	1.2	.2	.2	.2	.1	.1										527	529	1142	949
66/ 65	.2	2.7	1.4	.2	.2	.0	.1	.0	.0										309	313	851	876
64/ 63	.2	2.4	.9	.3	.1	.1	.0	.1											255	257	610	1028
62/ 61	.2	1.6	.3	.1	.1	.0	.0												141	141	481	758
60/ 59	.1	1.0	.2	.1	.1	.0	.0												97	98	239	735
58/ 57	.1	.4	.1																37	37	167	376
56/ 55		.0	.0																4	4	74	280
54/ 53																					26	180
52/ 51																					19	131
50/ 49																					5	147
48/ 47																					1	60
46/ 45																						44
44/ 43																						52
42/ 41																						68

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 8A 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE - 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

53908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

PAGE 2 | ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb Dew Point
40/ 39																				42
38/ 37																				38
36/ 35																				31
34/ 33																				17
32/ 31																				10
30/ 29																				1
28/ 27																				1
TOTAL	1.0	15.3	16.3	9.5	9.0	7.3	8.9	9.4	6.3	4.8	3.5	2.4	1.8	1.6	1.1	.6	.9	6296	6312	6296

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 90 F	≥ 93 F	Total
Rel. Hum.	28332404	4000830	63.[illegible]	[illegible]	6297							
Dry Bulb	37618316	4839946	76.7	8.022	6312			623.0	438.2	271.0	27.8	720
Wet Bulb	28492118	4322978	67.[illegible]	4.[illegible]	6296			439.8	78.9			720
Dew Point	25003898	3867267	61.4	6.[illegible]	6296		1.4	162.8	.8			720

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE - 1974 762-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PAGE 1 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
106/105																.0		1	1		
104/103															.0		.2	11	11		
102/101																.0	.2	18	18		
100/ 99										.0	.0	.0	.0	.0	.0	.1	.1	25	25		
98/ 97										.0	.1	.0	.2	.2	.1	.1	.2	61	62		
96/ 95								.0	.1	.2	.2	.3	.4	.3	.2	.1	.1	111	111		
94/ 93								.1	.3	.7	.6	.4	.5	.2	.2	.1		193	193		
92/ 91						.0		.8	1.4	1.4	.4	.4	.2	.2	.2	.0		322	323		
90/ 89						.1	.3	3.1	1.7	.8	.7	.3	.1	.1	.0	.0		440	443		
88/ 87						.3	2.7	2.4	1.3	.4	.4	.1	.1	.1				490	491		
86/ 85				.0	.2	2.2	3.3	2.2	.8	.4	.2	.1	.2	.0	.0	.0		613	613		
84/ 83				.2	.7	2.0	1.6	.6	.3	.1	.0	.1	.1					355	358		
82/ 81			.2	1.5	2.0	1.9	.7	.6	.2	.1	.1	.0		.0				465	467	3	
80/ 79		.3	1.2	3.2	2.0	.7	.3	.1	.1	.0	.1	.0						504	506	38	
78/ 77		1.4	4.7	4.7	1.3	.4	.3	.1	.1	.1	.0	.1		.0				806	808	308	4
76/ 75	.0	1.0	5.3	2.0	.5	.2	.1	.0	.1	.0	.0	.0	.0					585	585	1092	118
74/ 73	.0	1.1	4.2	1.4	.4	.2	.1	.1	.0			.0						463	464	1589	408
72/ 71	.0	1.8	2.3	.5	.3	.0	.0	.1	.0		.0							316	316	1261	1020
70/ 69	.0	1.6	1.1	.3	.1	.0	.0	.0										206	206	834	1356
68/ 67	.1	.7	.8	.2	.0	.0		.0		.0								116	118	497	1211
66/ 65	.0	.2	.1	.0	.0	.0												29	29	228	625
64/ 63		.2	.1	.0														16	16	143	419
62/ 61		.0		.0	.0													3	3	81	219
60/ 59																				28	230
58/ 57		.0																1	1	18	116
56/ 55																				12	78
54/ 53																				6	47
52/ 51																				2	96
50/ 49																					47
48/ 47																					42
46/ 45																					55
44/ 43																					40
42/ 41																					29
40/ 39																					6

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUL MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
38/ 37																					7
36/ 35																					6
34/ 33																					5
32/ 31																					2
30/ 29																					3
28/ 27																					1
26/ 25																					2
TOTAL	.3	8.4	20.0	14.2	7.7	8.1	9.8	10.3	6.7	4.4	2.9	1.9	1.9	1.2	.8	.5	.8	6150	6168	6150	6150

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	27971487	397277	64.6	19.375	6150							
Dry Bulb	41301738	583829	81.4	7.440	6168			738.1	680.9	398.8	50.8	744
Wet Bulb	31774983	441444	71.8	3.778	6150			680.1	386.6	1.6		744
Dew Point	27460713	410161	66.8	4.453	6150		1.0	498.1	64.1			744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) AUG (MONTH)

PAGE 1 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
102/101														.0	.0	.0	.1	11	11		
100/ 99													.0		.0	.1	.1	15	16		
98/ 97											.1	.1	.1	.1	.1	.0	.2	36	36		
96/ 95									.1	.3	.3	.4	.3	.2	.2	.1	.1	129	129		
94/ 93							.0	.2	.6	1.0	.7	.5	.2	.1	.0	.1	.1	227	228		
92/ 91							.0	1.2	1.6	1.8	.4	.4	.2	.1	.1	.0	.0	388	388		
90/ 89						.0	.2	3.7	2.0	1.1	.4	.2	.2	.2	.1	.0		524	526		
88/ 87			.0		.0	.4	2.7	2.6	.9	.5	.3	.2	.1	.1	.0			501	503		
86/ 85					.3	2.7	2.9	1.2	.5	.3	.1	.1	.1	.1	.0			547	549	2	
84/ 83	.0		.0	.5	1.1	1.8	1.3	.7	.2	.2	.0	.1	.1	.0				382	382	1	3
82/ 81			.4	2.8	1.9	1.6	.6	.4	.1	.0	.1	.0	.0					513	515	1	
80/ 79		.3	2.0	3.1	1.4	.8	.2	.2	.1	.0	.1	.1						524	525	41	
78/ 77		1.5	5.4	3.4	1.1	.6	.2	.1	.1	.0	.1	.0						804	804	418	7
76/ 75	.0	1.3	5.0	1.9	.8	.1	.1	.0	.0	.0	.1	.0						601	601	1497	145
74/ 73	.0	1.2	3.2	1.7	.5	.1	.1	.1	.0	.0								448	448	1524	688
72/ 71	.0	1.5	3.2	.8	.4	.2	.0	.1	.1	.0								414	415	1052	1168
70/ 69	.1	1.1	1.1	.3	.2	.2	.1	.1	.0	.0								204	205	810	1205
68/ 67	.2	.5	.9	.2	.2	.1	.1	.0	.0	.0								139	139	469	1211
66/ 65	.0	.2	.1	.1	.1		.0											31	31	269	610
64/ 63		.0	.0	.0														5	5	154	423
62/ 61																				84	291
60/ 59																				65	184
58/ 57																				33	74
56/ 55																				18	99
54/ 53																				5	63
52/ 51																				4	28
50/ 49																					45
48/ 47																					38
46/ 45																					39
44/ 43																					29
42/ 41																					17
40/ 39																					16
38/ 37																					8
36/ 35																					12

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | AUG MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
34/ 33																					4
32/ 31																					9
30/ 29																					2
28/ 27																					2
24/ 23																					1
22/ 21																					2
TOTAL	.4	7.6	21.3	14.7	7.0	8.5	8.6	10.8	6.6	5.5	2.7	1.9	1.3	.9	.6	.4	.6	6443	6456	6443	6443

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2961190[illegible]	419728	63.1[illegible]	[illegible].768	6443							
Dry Bulb	4309[illegible]287	323816	81.4	7.[illegible]	6456			739.9	632.4	401.8	48.4	744
Wet Bulb	3349[illegible]234	463778	72.0	4.[illegible]	6443			671.8	402.8	1.3		744
Dew Point	2931[illegible]187	432488	67.1	[illegible].[illegible]16	6443		1.8	511.2	97.3	.3		744

USAFETAC FORM 0-26-5 (OL A) AUG 66 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — SEP MONTH

PAGE 1 — ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
104/103														.0			.1		8	8		
102/101															.0	.0	.2		16	16		
100/ 99											.0		.1		.0	.0	.5		42	42		
98/ 97										.0	.0	.0	.0	.1	.0	.1	.3		46	46		
96/ 95								.0	.0	.1	.1	.2	.2	.1	.3	.2	.3		101	101		
94/ 93								.0	.0	.2	.2	.3	.2	.3	.4	.3	.2		155	155		
92/ 91								.1	.3	.6	.5	.5	.3	.5	.4	.2	.1		246	248		
90/ 89						.0	.0	.4	.7	1.2	.8	.3	.3	.6	.3	.1	.0		332	332		
88/ 87						.0	.4	1.2	1.4	.7	.6	.5	.4	.5	.1	.0			407	409		
86/ 85	.0				.1	.2	1.6	1.8	1.4	.9	.4	.3	.3	.2	.0	.0			517	517	1	1
84/ 83	.0			.1	.1	.9	1.3	1.3	.7	.5	.2	.3	.3	.1		.0			403	403	1	1
82/ 81			.0	.4	.4	1.6	1.1	1.1	.4	.2	.3	.2	.1						415	417	2	
80/ 79		.0	.2	.9	1.3	1.2	1.0	.7	.3	.1	.3	.1	.0						427	428	11	
78/ 77		.1	.6	1.9	1.7	1.2	.6	.5	.3	.3	.2	.2	.0						542	543	53	2
76/ 75		.2	1.1	1.8	1.3	.8	.3	.2	.2	.2	.1	.0							451	454	222	17
74/ 73		.2	1.7	1.9	1.2	.2	.3	.3	.4	.2	.0	.0							463	463	697	72
72/ 71	.0	1.2	2.9	1.4	1.3	.3	.3	.2	.2	.1	.0	.0							551	553	952	182
70/ 69	.0	1.8	2.2	1.5	.7	.3	.3	.3	.2	.0	.0								510	512	1053	466
68/ 67	.2	2.0	3.9	1.4	.6	.4	.3	.4	.1	.0									645	648	996	1002
66/ 65	.1	1.3	2.0	.6	.3	.2	.2	.1	.0										335	337	880	851
64/ 63	.0	.9	1.1	.5	.2	.3	.2	.1	.0										229	229	768	877
62/ 61	.1	.4	.3	.3	.1	.2	.1	.0											101	101	539	781
60/ 59	.0	.2	.1	.2	.2	.0	.1												51	51	319	727
58/ 57			.0	.0	.1														7	7	217	338
56/ 55						.0													1	1	141	251
54/ 53						.0													2	2	78	193
52/ 51					.0														1	1	46	149
50/ 49																					15	184
48/ 47																					9	170
46/ 45																					2	168
44/ 43																					2	167
42/ 41																						138
40/ 39																						80
38/ 37																						64

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 752-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | SEP MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
36/ 35																					57
34/ 33																					24
32/ 31																					19
30/ 29																					14
28/ 27																					7
26/ 25																					1
24/ 23																					1
TOTAL	.4	8.3	16.3	12.8	9.7	7.8	8.1	8.8	6.7	5.4	3.9	3.0	2.2	2.3	1.5	1.0	1.7		7024		7004
																		7004		7004	

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	28263171	418468	59.7	21.589	7004							
Dry Bulb	42906078	543220	77.4	9.109	7024			645.2	469.7	293.1	37.7	720
Wet Bulb	31838588	466821	66.9	5.813	7004			410.0	101.5	.8		720
Dew Point	28819768	421422	60.2	8.778	7004		4.2	177.2	9.0	.2		720

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																			TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
100/ 99													.0				.0	2	2		
98/ 97																	.0	1	1		
96/ 95												.0	.0	.0	.1	.0	.1	21	21		
94/ 93												.0	.1	.1	.1	.2	.1	43	43		
92/ 91						.0				.0	.1	.1	.0	.3	.2	.1	.0	59	59		
90/ 89									.0	.1	.1	.2	.3	.3	.2	.1	.0	90	91		
88/ 87							.0	.1	.1	.1	.2	.3	.6	.4	.2	.0		143	145		
86/ 85							.2	.2	.5	.5	.4	.8	.7	.3	.2	.0		269	269		
84/ 83						.0	.2	.5	.5	.6	.8	.7	.5	.1	.0	.0		283	284		
82/ 81				.0		.2	.4	.9	.7	.6	.5	.3	.3	.1	.1			302	302	1	
80/ 79				.0	.1	.5	.6	.9	.8	.9	.5	.5	.1	.1	.1			363	363		
78/ 77				.1	.5	.8	1.1	.9	.9	.5	.7	.4	.2	.0	.0			437	438		1
76/ 75			.0	.4	.8	.8	.8	.9	.6	.7	.4	.1	.1	.0				400	400	6	
74/ 73			.2	.5	.8	.7	.7	.9	.5	.3	.2	.0	.1	.0				359	359	33	1
72/ 71		.0	.5	.5	1.4	.6	1.0	.6	.5	.2	.2	.1	.1	.0				401	402	92	3
70/ 69		.2	.8	1.0	1.0	.8	.8	.4	.3	.2	.1	.0	.0					397	399	314	10
68/ 67	.1	.7	2.1	1.8	1.1	1.0	.9	.5	.2	.3	.1	.1						626	626	455	100
66/ 65	.1	1.2	2.0	1.4	1.0	.6	.7	.4	.4	.1	.0	.0						569	571	683	192
64/ 63	.1	2.0	2.2	1.7	.8	1.2	.5	.2	.2	.1	.0							652	654	936	373
62/ 61	.2	2.1	2.0	1.6	.7	.6	.5	.2	.0	.0	.0							570	570	980	484
60/ 59	.3	2.3	2.3	1.3	.5	.6	.4	.1	.1	.0								578	579	909	822
58/ 57	.0	.9	.7	.6	.6	.4	.1	.1	.1	.1								257	260	872	657
56/ 55	.0	.5	.2	.7	.2	.1	.1	.0	.0									135	135	586	852
54/ 53	.0	.3	.6	.3	.1	.2	.1	.1	.0									108	108	406	968
52/ 51	.0	.1	.2	.2	.1	.1	.0											49	49	313	963
50/ 49	.0	.0	.1	.1	.2	.1	.1											43	43	271	982
48/ 47			.0	.1	.1	.0												18	18	129	880
46/ 45			.0	.0														3	3	62	896
44/ 43																				36	284
42/ 41																				31	349
40/ 39																				19	181
38/ 37																				4	152
36/ 35																					116
34/ 33																					92

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | OCT MONTH

PAGE 2 | ALL HOURS (L, S, T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
32/ 31																					101
30/ 29																					49
28/ 27																					32
26/ 25																					23
24/ 23																					24
22/ 21																					29
20/ 19																					22
18/ 17																					17
16/ 15																					7
14/ 13																					7
12/ 11																					7
10/ 9																					4
8/ 7																					1
4/ 3																					1
TOTAL	.8	10.1	13.8	12.2	10.0	9.3	9.4	7.9	6.6	5.3	4.4	3.5	3.1	1.7	1.1	.6	.3	7178	7194	7178	7178

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	26794714	408796	57.0	23.135	7178							
Dry Bulb	36024003	504315	70.1	9.054	7194			434.8	287.2	144.2	6.9	744
Wet Bulb	25892378	428864	59.7	6.123	7178			93.4	4.1	.1		744
Dew Point	19038476	370910	51.7	9.679	7178		33.6	11.9	.8			744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE — 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
90/ 89															.2	.0		15	15		
88/ 87														.1	.1	.0		14	14		
86/ 85													.0	.2	.0			16	16		
84/ 83										.0	.0	.2	.1	.1				28	28		
82/ 81								.0	.0		.2	.3	.1	.0	.0			49	49		
80/ 79						.0	.0		.1	.2	.4	.3	.1	.0	.0			77	77		
78/ 77						.0		.1	.4	.5	.5	.4	.2	.0				161	161		
76/ 75					.0	.0	.1	.3	.6	.8	.7	.4	.1					215	216		
74/ 73		.0			.0	.1	.2	.6	.7	.6	.6	.2	.0					223	224		
72/ 71			.0		.2	.4	.9	.8	.8	.6	.3	.1						295	296	1	
70/ 69			.0	.0	.4	1.1	.7	.6	.7	.3	.1	.1						294	295	2	1
68/ 67		.0	.1	.4	1.2	1.3	1.0	1.0	.5	.4	.1	.1						441	442	6	2
66/ 65		.0	.2	.6	1.1	.8	.8	.6	.4	.2	.1							335	335	16	
64/ 63		.1	.9	1.1	1.1	1.2	.8	.6	.3	.2	.0							460	461	79	4
62/ 61		.5	1.4	1.1	.9	.7	.7	.4	.3	.1	.0							439	440	304	13
60/ 59	.1	1.6	2.1	1.8	1.2	.9	.7	.2	.2	.1								631	631	629	71
58/ 57	.3	2.3	1.9	1.6	1.0	.7	.4	.2	.1	.0								618	619	829	216
56/ 55	.3	2.8	1.6	1.7	1.1	.4	.3	.3	.1	.0								613	614	912	396
54/ 53	.3	2.8	2.3	1.4	.7	.2	.4	.2	.0									606	607	878	602
52/ 51	.2	2.2	2.0	.9	.7	.3	.4	.1										480	484	787	610
50/ 49	.3	2.2	1.9	1.4	.9	.6	.2	.0										548	551	822	807
48/ 47	.1	.7	.8	.7	.5	.2	.1											225	226	578	592
46/ 45		.4	.5	.6	.3	.3	.0											147	148	399	703
44/ 43		.1	.2	.3	.4	.1												87	87	263	487
42/ 41		.1	.2	.2	.3	.0												74	74	252	372
40/ 39		.0	.1	.4	.2													50	50	158	384
38/ 37		.0	.2	.2	.1													37	37	72	359
36/ 35		.1	.1	.2														24	24	87	282
34/ 33		.0	.1	.0														8	8	90	198
32/ 31			.0	.0														2	2	29	204
30/ 29																				16	136
28/ 27																				3	130
26/ 25																					94
24/ 23																					128

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AM 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | NOV MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
22/ 21																					85
20/ 19																					71
18/ 17																					49
16/ 15																					19
14/ 13																					11
12/ 11																					6
10/ 9																					1
8/ 7																					3
6/ 5																					1
TOTAL	1.6	15.9	16.6	14.7	12.4	9.8	7.6	6.0	5.0	3.9	3.0	2.0	.7	.4	.3	.1		7212	7231	7212	7212

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	29776664	485843	68.6	21.748	7212							
Dry Bulb	2049760	52236	59.8	9.336	7231		.2	182.8	79.7	15.1		720
Wet Bulb	1903810	53335	51.8	4.879	7212		4.8	.9				720
Dew Point	1687848	49868	43.8	7.488	7212		98.6	.2				720

FORM AA 44 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

U. S. GOVERNMENT PRINTING OFFICE — 1974 762-616

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-75 YEARS — DEC MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
74/ 73										.0	.0							3	3		
72/ 71									.0	.0								2	2		
70/ 69						.1	.0	.1	.0			.0						16	16		
68/ 67					.1	.1	.2	.1	.0	.1	.0							42	42		
66/ 65				.1	.1	.2	.4	.1	.2	.2	.0							97	98		
64/ 63			.0	.4	.7	.7	.5	.3	.4	.3	.0							232	232		
62/ 61		.0	.3	.7	.7	.9	.7	.6	.3	.1								294	295	3	
60/ 59		.3	.8	1.1	1.0	1.2	1.0	.8	.3	.1	.0							441	441	20	
58/ 57		.9	1.4	1.2	.6	.8	.5	.4	.1	.2	.0							421	422	107	10
56/ 55	.1	1.3	1.3	1.0	1.0	1.0	.7	.2	.1	.0								452	453	297	72
54/ 53	.2	2.8	1.7	1.7	1.2	1.0	.7	.3	.1									651	651	440	142
52/ 51	.2	2.7	2.0	1.1	.8	.7	.4	.1										555	556	579	287
50/ 49	1.1	4.5	4.0	2.2	1.6	.9	.4	.2										1009	1011	779	594
48/ 47	.3	2.8	2.3	1.2	1.0	.6	.3	.0										579	580	870	462
46/ 45	.5	2.4	1.4	1.3	.9	.6	.2											498	498	843	668
44/ 43	.1	1.6	1.7	1.8	.6	.4	.1											424	423	587	448
42/ 41	.1	1.5	2.4	1.5	.8	.3	.0											461	462	563	560
40/ 39	.0	.8	1.7	.8	.3	.0												250	251	445	433
38/ 37		.7	.7	.5	.2	.1												151	151	474	433
36/ 35	.0	.6	.5	.3	.1	.0												106	106	336	370
34/ 33	.0	.5	.4	.2	.1													82	82	227	341
32/ 31		.3	.2	.3	.0													55	55	127	536
30/ 29		.1	.0	.0														11	11	68	328
28/ 27		.0	.0	.0														4	4	46	301
26/ 25																				20	239
24/ 23																			1	5	181
22/ 21																					93
20/ 19																					68
18/ 17																					63
16/ 15																					63
14/ 13																					57
12/ 11																					38
10/ 9																					21
8/ 7																					15

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE — 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-75 YEARS | DEC MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
6/ 5																						7
4/ 3																						1
2/ 1																						3
0/ -1																						1
-2/ -3																						1
TOTAL	2.	723.	823.	017.	212.	0	9.5	5.9	3.1	1.5	1.1	.2	.0							6848		6836
																			6836		6836	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 92 F	Total
Rel. Hum.	32921219	4340487	64.	.088	6836							
Dry Bulb	17791089	348141	50.4	7.	6848		7.7	6.8	.3			744
Wet Bulb	14111427	207289	44.9	4.	6836		29.0					744
Dew Point	10488719	281687	38.2	3.	6836	.2	219.4					744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE - 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JAN MONTH

PAGE 1 | 0000-0200 HOURS (L, S, T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb Dew Point	
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
66/ 65									.5									4	4		
64/ 63							.1	.2	.2									5	5		
62/ 61						.1		.3										4	4		
60/ 59								.1										1	1		
58/ 57			.1	.5	.6	.2												12	12		
56/ 55		.5	.7	.1	.1													12	12	1	
54/ 53	.5	.9	.8	1.6	.3													33	33	11	5
52/ 51	.2	.7	1.4	.8	.7		.2											35	35	24	8
50/ 49	.2	2.3	4.1	1.6	.7	.7	.2											86	86	31	20
48/ 47	.2	4.4	3.2	.8	.8	1.1	.1											94	94	73	15
46/ 45	.6	5.4	3.3	1.3	1.5	1.3	.2											116	119	98	71
44/ 43	.5	3.8	1.9	2.5	.3	.3												83	84	79	60
42/ 41	1.0	4.0	3.6	2.4	1.5	.6												115	115	92	78
40/ 39		1.9	4.7	1.3	.9	.3												80	80	67	66
38/ 37		1.7	2.6	2.3	.8	.2												67	67	105	63
36/ 35		2.4	3.5	1.6	.6													71	71	88	50
34/ 33	.1	1.3	1.6	.6	.3													34	34	93	48
32/ 31		.2	1.1	.5	.1													17	17	51	89
30/ 29			.3															3	3	40	52
28/ 27			.1															1	1	13	61
26/ 25			.3															3	3	8	44
24/ 23																				1	44
22/ 21																				3	28
20/ 19																					22
18/ 17																					15
16/ 15																					12
14/ 13																					13
12/ 11																					5
10/ 9																					3
8/ 7																					3
6/ 5																					3
TOTAL	3.3	29.4	33.1	17.7	9.3	4.9	.9	.7	.7										880		878
																		878		878	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4421844	61824	70.4	17.498	878							
Dry Bulb	1715639	38441	43.7	8.487	880		2.3					93
Wet Bulb	1411	34	39.7	6.359	878		12.3					93
Dew Point		29794	33.9	7.278	878		41.7					93

USAFETAC FORM AWS 94 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PAGE 1 0300-0500 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
68/ 67									.1									1	1		
66/ 65									.1									1	1		
64/ 63								.1	.6									6	6		
62/ 61								.1	.1									2	2		
60/ 59					.1													1	1		
58/ 57					.2	.3												5	5		
56/ 55		.3	.3	.3	.3	.1		.1										14	14		
54/ 53	.2	.3	.8	.7	.5													22	22	6	4
52/ 51	.1	.8	1.2	1.3	.7		.1											36	36	13	4
50/ 49		2.9	2.3	1.6	.7	.5	.3	.1										73	73	32	12
48/ 47	.5	4.8	2.6	1.3	.8	.6	.1											93	93	78	23
46/ 45	.6	6.3	3.8	1.7	.3	1.0	.1											121	122	82	66
44/ 43	.2	3.6	1.6	2.1	1.8	.1												82	82	92	47
42/ 41	.6	2.3	3.7	3.1	2.0	.9												116	118	89	79
40/ 39	.1	2.5	3.1	2.4	.9	.2												81	81	56	75
38/ 37	.1	1.2	2.4	2.5	.7	.1												61	62	88	61
36/ 35		1.8	4.1	2.3	.3	.3												78	78	82	41
34/ 33	.3	1.2	1.3	1.6	.2													40	40	92	37
32/ 31	.1	.9	1.0	.5	.1													23	23	73	72
30/ 29		.2	.2	.2														6	6	46	60
28/ 27	.1		.2															3	3	24	48
26/ 25			.1															1	1	11	55
24/ 23		.1																1	1	3	39
22/ 21																				2	26
20/ 19																					24
18/ 17																					20
16/ 15																					12
14/ 13																					12
12/ 11																					7
10/ 9																					6
8/ 7																					4
6/ 5																					5
TOTAL	3.0	30.4	28.9	21.6	9.8	4.3	.7	.3	.9									869	871	869	869

Element (X)	$\Sigma_{X'}$	Σ_{X}	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4480692	60438	69.5	17.034	869							
Dry Bulb	1482738	27828	43.1	4.440	871		3.0	.1				93
Wet Bulb	1366178	39916	39.0	4.433	869		17.0					93
Dew Point	1027118	28488	33.0	9.733	869		44.9					93

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — JAN MONTH

PAGE 1 — 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
66/ 65								.1	.2									3	3		
64/ 63								.1	.2									3	3		
60/ 59					.1	.1	.1	.1										4	4		
58/ 57		.1	.2	.3	.1	.2												9	9		
56/ 55		.2	.1	.1	.5	.1	.1	.1										11	11	2	
54/ 53		.3	.3	.9	.9	.1												23	24	3	1
52/ 51	.1	.7	1.7	1.3	.7	.1	.2	.1										43	43	11	6
50/ 49	.5	2.6	2.9	1.6	.8	.9	.3											84	84	39	15
48/ 47	.2	5.8	2.5	1.3	1.5	1.0	.3											110	110	69	20
46/ 45	.5	4.7	3.2	1.4	1.2	1.0	.2											106	106	99	61
44/ 43	.3	2.4	.8	3.2	1.6	.2												75	75	80	65
42/ 41	1.0	2.0	3.5	2.0	2.2	.7												98	98	72	57
40/ 39		2.5	4.3	2.1	.8	.1												85	87	59	63
38/ 37		1.0	2.6	2.3	.1													53	54	101	56
36/ 35	.1	2.2	3.0	2.5	.7	.1												75	75	99	42
34/ 33	.1	1.3	2.2	1.3	.6													47	47	86	31
32/ 31	.1	1.2	1.0	.7	.1													27	27	63	97
30/ 29		.5	.5	.1														9	9	51	65
28/ 27			.2	.1														3	3	23	61
26/ 25																				11	51
24/ 23		.1																1	1	3	45
22/ 21																				2	42
20/ 19																					33
18/ 17																					18
16/ 15																					10
14/ 13																					12
12/ 11																					6
10/ 9																					7
8/ 7																					3
6/ 5																					2
TOTAL	3.0	27.6	29.1	21.2	11.9	4.8	1.4	.6	.3									869	873	869	869

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_s	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4373876	59702	68.7	17.700	869							
Dry Bulb	1668214	37698	43.2	6.343	873		4.3					93
Wet Bulb	1355881	35865	39.0	6.450	869		16.4					93
Dew Point	1010288	28460	32.8	9.496	869		48.4					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PAGE 1 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
74/ 73											.1							1	1		
72/ 71										.1	.1							2	2		
70/ 69										.2								2	2		
68/ 67								.1	.1	.3								5	5		
66/ 65							.1	.1	.2	.1								5	5		
64/ 63						.9	.2	.3	.1		.1							15	15		
62/ 61			.1	.1	.8	.5	.2	.1	.2	.5								22	22		
60/ 59			.3	.6	1.4	1.4	.9	.3	.6	.1								51	51		
58/ 57		.2	1.0	.5	1.9	2.0	1.3	.9	.9	.1								76	76	3	
56/ 55		.3	.5	.8	.9	1.3	1.6	.9	.1									56	56	11	2
54/ 53		.7	1.7	2.4	2.1	2.1	2.6	1.2										110	111	32	6
52/ 51		1.0	1.7	1.3	2.4	2.1	1.7	.2										91	91	47	13
50/ 49		2.4	3.1	1.7	3.3	3.7	1.7	.3										142	142	85	15
48/ 47	.3	2.3	1.7	.7	1.9	1.5	.7	.1										80	80	102	27
46/ 45	.2	2.8	1.2	2.1	1.3	1.3	.5	.6										87	87	103	66
44/ 43		.6	.7	.9	1.0	.8	.6	.1										41	41	132	66
42/ 41	.1	.6	.8	1.0	.9	1.3	.1											42	42	109	74
40/ 39		.5	.5	.3	.9	.1												20	20	99	51
38/ 37		.1	.1	.2	.3	.1												8	8	46	40
36/ 35		.1																1	1	37	40
34/ 33				.1														1	1	24	60
32/ 31		.1																1	1	29	72
30/ 29																				2	58
28/ 27																				2	47
26/ 25																					40
24/ 23																					30
22/ 21																					30
20/ 19																					26
18/ 17																					14
16/ 15																					14
14/ 13																					13
12/ 11																					7
10/ 9																					7
8/ 7																					2

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

 0900-1100 (HOURS (L. S. T.))

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
6/ 5																					5
2/ 1																					1
0/ -1																					1
-2/ -3																					1
-4/ -5																					1
TOTAL	.7	11.9	13.6	12.9	19.4	19.1	12.3	5.6	2.6	1.5	.3							860			859
																	859		859		

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	2920157	46969	54.7	20.253	859							
Dry Bulb	2286540	44034	51.2	6.122	860		.1	1.1	.1			93
Wet Bulb	1665819	37817	43.7	5.384	859		5.6					93
Dew Point	1067637	28933	33.7	10.354	859	.2	43.1					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PAGE 1 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
80/ 79													.1					1	1		
78/ 77												.3	.1					4	4		
76/ 75											.1	.5						5	5		
74/ 73											.5							4	4		
72/ 71										.3	.1							4	4		
70/ 69								.7	.3									9	9		
68/ 67							.6	.1	.1	.1	.1	.1						10	10		
66/ 65						.2	.1	.2	.2	.7	.6							27	27		
64/ 63				.2	.3	.1	.7	.7	.6	1.4	.3							56	56		
62/ 61				1.0	1.7	1.7	1.1	.9	.9	.8	.1							73	73		
60/ 59			.8	1.3	2.7	1.9	2.2	2.9	1.5	.5								120	120		
58/ 57			.9	.5	1.9	3.2	2.9	2.7	.3	.3								112	113	5	
56/ 55		.3	.8	1.0	1.8	2.7	3.3	2.1	.5	.1								111	111	45	
54/ 53		.2	1.6	1.8	1.5	2.5	1.9	1.3	.7									101	101	72	6
52/ 51		1.7	.8	.5	.6	.5	.8	.5	.1									47	48	76	17
50/ 49	.1	2.7	2.2	1.0	1.4	1.1	1.0	1.3	.1									96	96	115	39
48/ 47	.2	.8	.5	.2	.3	.9	.9	.3	.1									38	38	131	51
46/ 45	.1	1.0	.3	.3	.1	.5	.3	.3										28	29	149	78
44/ 43		.6	.3	.1	.2	.7	.2											19	19	103	65
42/ 41		.2	.1	.2	.1	.1												7	7	68	58
40/ 39		.3																3	3	40	55
38/ 37																				24	44
36/ 35																				19	42
34/ 33																				13	53
32/ 31																				5	80
30/ 29																					47
28/ 27																					42
26/ 25																					35
24/ 23																					28
22/ 21																					22
20/ 19																					31
18/ 17																					26
16/ 15																					10
14/ 13																					13

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JAN MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
12/ 11																					13
10/ 9																					5
8/ 7																					2
6/ 5																					5
4/ 3																					2
2/ 1																					1
0/ -1																					3
-4/ -5																					1
-6/ -7																					1
TOTAL	.5	8.0	8.3	8.2	12.8	17.3	18.2	14.1	5.5	4.2	1.8	.9	.2					875	878	875	875

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2432970	42268	48.3	21.155	875							
Dry Bulb	2797567	49251	56.1	4.304	878			3.9	1.5			93
Wet Bulb	1914147	40669	46.5	5.229	875		.5					93
Dew Point	1144816	30142	34.4	11.028	875	.5	39.0					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PAGE 1 1500-1700 (HOURS L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
78/ 77													.1					1	1		
76/ 75											.1	.2						3	3		
72/ 71									.1	.2	.2							5	5		
70/ 69							.1			.1	.1							3	3		
68/ 67						.1	.3	.3		.1	.1	.2						11	11		
66/ 65					.3	.1	.8	.1	.5	.2	.1	.1						20	20		
64/ 63				.1	.3	1.1	1.0	.5	.3	1.0	.1							40	40		
62/ 61			.1	.6	.9	.8	.3	.9	.7	.6	.1							44	44		
60/ 59			.6	1.6	1.6	3.1	1.7	2.5	1.6	.5								115	116		
58/ 57			1.4	1.4	2.5	1.0	1.6	2.0	.8	.1								94	94	9	
56/ 55		1.0	.7	1.7	2.5	2.3	1.4	1.1	.7									100	100	32	
54/ 53		.8	2.1	2.8	2.1	2.8	.8	.8	.2									107	108	62	0
52/ 51		1.7	1.6	1.3	1.6	1.0	1.1	.6										78	78	65	26
50/ 49	.2	2.1	1.6	1.1	1.6	1.3	.2	1.0	.3									83	83	124	41
48/ 47	.2	1.6	1.1	.9	.6	.6	.6	.1										50	50	116	41
46/ 45	.2	1.5	.9	.6	.8	.9	.6	.2										50	50	139	84
44/ 43	.2	.7	.2	.6	.6	.5	.2	.1										27	27	114	75
42/ 41		1.0	.5	.8	.1	.5	.2											27	27	76	87
40/ 39		.2	.2	.1	.3													8	8	42	34
38/ 37		.2		.1														3	3	35	59
36/ 35		.1		.1														2	2	31	41
34/ 33																				12	56
32/ 31																				13	55
30/ 29																				1	48
28/ 27																					32
26/ 25																					26
24/ 23																					41
22/ 21																					27
20/ 19																					16
18/ 17																					17
16/ 15																					15
14/ 13																					15
12/ 11																					11
10/ 9																					6

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JAN MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
8/ 7																					1
6/ 5																					3
4/ 3																					1
2/ 1																					1
-4/ -5																					1
-6/ -7																					2
-10/-11																					1
TOTAL	.9	11.0	11.0	13.8	16.0	16.1	11.1	10.3	5.3	2.9	.9	.6	.1					873			871
																	871		871		

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2877334	46378	53.2	21.652	871							
Dry Bulb	2606060	47356	54.2	6.334	873			2.3	.4			93
Wet Bulb	1860310	39970	45.9	5.477	871		1.5					93
Dew Point	1192749	30785	35.3	10.969	871	.4	34.1					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PAGE 1 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
68/ 67									.1	.5								5	5		
66/ 65									.2									2	2		
64/ 63				.1	.1			.3	.1									6	6		
62/ 61			.1															1	1		
60/ 59			.1		.2	.1												4	4		
58/ 57		.3	.2	.5	.6	.2												10	10	3	
56/ 55		.5	1.1	.8	1.1	.2	.1											34	34	5	3
54/ 53	.1	1.6	.7	2.8	1.2	.5	.6											66	67	15	5
52/ 51		1.6	3.3	1.4	1.1	1.2	.2											78	78	36	14
50/ 49	.5	5.3	4.9	2.6	2.4	1.9	.7	.2										103	103	75	37
48/ 47		3.3	3.1	1.6	1.4	.8		.1										90	90	109	33
46/ 45	.6	5.2	2.0	1.9	.8	1.0	.1											103	104	109	77
44/ 43	.2	3.6	2.0	2.0	1.1	.3	.1											84	84	90	85
42/ 41	.2	3.2	4.9	2.3	1.4	.6												110	111	108	92
40/ 39		1.2	2.7	1.4	.5	.8												58	59	84	68
38/ 37		1.0	1.0	.7	.8	.2												33	33	98	54
36/ 35		.3	.7	.2	.3	.1												15	15	58	92
34/ 33	.1		.3	.5														9	9	41	65
32/ 31		.1		.1														2	2	23	77
30/ 29				.2														2	2	15	51
28/ 27																				9	32
26/ 25																				2	36
24/ 23																				1	24
22/ 21																					23
20/ 19																					8
18/ 17																					11
16/ 15																					4
14/ 13																					6
12/ 11																					6
10/ 9																					9
8/ 7																					4
6/ 5																					3
4/ 3																					2

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JAN MONTH

1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	1.	727.	427.	419.	113.	18.	1.	8	.7	.5	.5							881	885	881	881

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4438939	60405	68.6	18.381	881							
Dry Bulb	1972960	41452	46.8	5.961	885		.4	.5				93
Wet Bulb	1604593	37231	42.3	5.956	881		51.3					93
Dew Point	1226536	31782	36.1	9.334	881		31.2					93

FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JAN (MONTH)

PAGE 1 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
66/ 65									.3	.1								4	4		
64/ 63									.3									3	3		
62/ 61								.2										2	2		
60/ 59			.1	.1		.1												3	3		
58/ 57				.2	.3	.1												6	6		
56/ 55		.6	.2	.3	.1	.1												12	12	2	
54/ 53		1.7	.9	1.0	.6		.1	.2										40	40	8	4
52/ 51		1.1	1.9	1.1	.3		.1											41	41	19	8
50/ 49	.5	2.7	3.6	2.3	.9	.9												96	96	43	22
48/ 47	.5	5.0	2.8	1.0	1.6	1.0	.2											107	107	87	27
46/ 45		4.9	1.7	1.6	.9	1.5	.3											96	96	99	75
44/ 43	.1	4.9	1.5	1.8	.8	.5	.2											86	86	77	49
42/ 41	.3	5.8	5.6	1.9	.7	.6												131	131	80	92
40/ 39	.2	3.0	4.3	1.7	.9	.3												92	92	92	82
38/ 37	.1	3.1	2.7	.9	.8													67	67	112	56
36/ 35		1.7	2.3	1.2	1.0													55	55	96	54
34/ 33	.1	.8	1.5	.9														29	29	68	65
32/ 31		.1	.1	.1	.1													4	4	45	72
30/ 29				.1	.2													3	3	32	55
28/ 27				.2														2	2	13	48
26/ 25		.1																1	1	1	37
24/ 23																				5	40
22/ 21																				1	26
20/ 19																					16
18/ 17																					7
16/ 15																					14
14/ 13																					10
12/ 11																					7
10/ 9																					4
8/ 7																					2
6/ 5																					5
2/ 1																					2
TOTAL	1.8	39.5	29.3	16.7	9.2	5.1	1.0	.5	.7	.1								880	881		880
																		880		880	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4783268	62739	71.3	17.838	880							
Dry Bulb	1744221	38828	44.1	4.143	881		1.1					93
Wet Bulb	1482369	33338	40.2	4.178	880		10.2					93
Dew Point	1128688	20384	34.5	9.205	880		24.4					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — FEB MONTH

PAGE 1 — 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
68/ 67																			1		
66/ 65								.1										1	1		
64/ 63						.1												1	1		
62/ 61							.1											1	1		
60/ 59		.1				.4	.1											5	5		
58/ 57		.3			.1	.3												5	5	1	
56/ 55		.5		.3	.1	.4												10	10	3	3
54/ 53		2.7	1.3	.9	.7													43	43	15	3
52/ 51	.3	1.3	1.2	.3	.7	.3	.3											32	32	20	17
50/ 49	1.2	4.7	3.5	2.6	2.1	.7	.3											115	115	51	34
48/ 47	1.2	4.9	2.0	2.6	.5	.8	.4											95	95	63	33
46/ 45	.9	6.1	2.7	1.3	.9	.8	.1											99	99	95	66
44/ 43	.3	3.1	1.6	1.4	1.3	.4												62	62	83	57
42/ 41	1.2	2.9	2.5	1.4	1.8	.3												77	77	76	54
40/ 39	.3	1.2	4.3	2.0	1.7													72	72	54	47
38/ 37	.1	2.3	2.3	2.5	.8	.1												63	63	61	60
36/ 35		2.3	2.0	.8	.3	.3												43	43	84	44
34/ 33		.9	.7	.5	.3													18	18	77	42
32/ 31	.1	.4	1.0	.8	.1													19	19	89	70
30/ 29		.4	.1	.3	.1													7	7	20	43
28/ 27		.1																1	1	15	32
26/ 25																				9	36
24/ 23																				3	38
22/ 21																					20
20/ 19																					13
18/ 17																					10
16/ 15																					12
14/ 13																					7
12/ 11																					3
10/ 9																					3
6/ 5																					4
4/ 3																					3
2/ 1																					1

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 80 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PAGE 2 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
TOTAL	5.5	34.3	25.1	17.6	11.4	4.7	1.3	.1										769	770	769	769

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4238610	55296	71.9	18.497	769							
Dry Bulb	1343878	34160	44.4	6.266	770		2.9	.1				84
Wet Bulb	1295287	31151	40.5	6.405	769		9.4					84
Dew Point	1028178	26914	35.0	10.033	769		33.8					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PAGE 1 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
68/ 67									.1										1	1		
64/ 63					.1		.1												2	3		
62/ 61							.3												2	2		
60/ 59					.1	.1													2	2		
58/ 57				.1		.3													3	3		
56/ 55	.1	.5		.4	.4	.3													13	13	2	1
54/ 53	.1	1.2	1.5	.7	.1	.5													31	31	9	2
52/ 51	.3	.7	1.5	.4	.5	.1	.7	.1											32	32	17	13
50/ 49	1.1	4.2	2.8	1.2	1.8	.3	.3												88	88	40	19
48/ 47	1.6	5.2	2.6	1.7	1.2	.4	.3												98	98	66	37
46/ 45	.7	5.4	2.4	1.6	.5	.5	.1												85	85	82	53
44/ 43	.4	3.8	1.8	1.6	.8	.5													68	68	76	57
42/ 41	1.2	3.4	2.0	1.8	2.4	.3													84	84	87	68
40/ 39	.5	1.8	3.3	2.4	1.6	.1													74	74	58	56
38/ 37		1.3	2.4	3.0	1.2														60	60	46	44
36/ 35		1.7	4.4	1.5	.1														58	58	72	44
34/ 33		.7	1.2	.3	.3														18	18	73	34
32/ 31	.1	.5	.9	.8	.7														23	23	68	42
30/ 29		.3	.3	.7	.3														11	11	29	54
28/ 27		.1	.1																2	2	13	33
26/ 25		.3																	2	2	12	43
24/ 23																					7	49
22/ 21																						37
20/ 19																						21
18/ 17																						18
16/ 15																						8
14/ 13																						10
12/ 11																						1
10/ 9																						6
8/ 7																						3
4/ 3																						1
2/ 1																						3
TOTAL	6.1	31.2	27.1	18.1	12.2	3.4	1.7	.1	.1										757	758	757	757

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4091963	53877	71.2	18.454	757							
Dry Bulb	1471782	33036	43.6	6.496	758		4.2	.1				84
Wet Bulb	1229818	39078	39.7	6.771	757		14.3					84
Dew Point	934088	29744	34.0	10.194	757		36.3					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PAGE 1 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
64/ 63						.1												1	1		
62/ 61						.3												2	2		
58/ 57			.1	.1	.3	.3	.1											7	7		
56/ 55		.5		.7	.4	.4	.3											17	17		
54/ 53	.1	1.4	1.0	.8	.9	.3		.4										38	38	14	1
52/ 51	.1	1.8	1.6	.3	.9		.1											37	38	14	15
50/ 49	.3	4.8	4.2	2.6	2.5		.4											113	113	46	24
48/ 47	.9	3.9	2.4	2.0	2.4	1.4	.1											100	100	67	35
46/ 45	.9	4.6	2.9	2.2	1.6	.9	.1											101	101	90	59
44/ 43	.3	3.0	1.2	2.5	.1	.4												57	57	78	53
42/ 41	1.0	2.9	2.5	2.9	1.3	.5												85	85	88	64
40/ 39	.3	1.8	2.4	2.0	2.7	.4												73	73	63	44
38/ 37		.7	2.6	2.4	.7													48	48	70	46
36/ 35		.4	2.7	1.8	.3													40	40	57	50
34/ 33		.4	.8	1.2	.1													19	19	70	40
32/ 31			.9	.8	.5													17	17	52	61
30/ 29		.1	.4	.3														6	6	25	45
28/ 27		.1	.1															2	2	14	35
26/ 25		.1																1	1	12	38
24/ 23																				4	38
22/ 21																					27
20/ 19																					30
18/ 17																					25
16/ 15																					17
14/ 13																					4
12/ 11																					3
10/ 9																					3
8/ 7																					4
4/ 3																					2
2/ 1																					1
TOTAL	3.9	28.7	25.8	22.4	14.7	5.0	1.2	.4										784	765	764	764

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2867962	52848	68.8	18.217	784							
Dry Bulb	1340778	34008	44.8	4.184	765		2.9					84
Wet Bulb	1264267	30698	40.2	4.881	764		11.8					84
Dew Point	961777	23977	34.0	10.149	764		30.4					84

USAFETAC FORM 0-26-5 (OL A) JAN 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) FEB (MONTH)

PAGE 1 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
70/ 69							.1		.1									2	2		
68/ 67					.1	.1		.1	.1									4	4		
66/ 65					.1	.1	.3	.3	.3	.1								11	12		
64/ 63				.4	.3	1.1	.3	.1	.1									17	17		
62/ 61		.3	.3	.7	.8	.8	.7	.4	.3									31	31		
60/ 59			.9	1.7	2.8	2.5	1.9	1.2	.8	.1								90	90	3	
58/ 57		.5	.4	1.1	2.5	2.4	1.3	.7	.7									72	72	9	2
56/ 55		1.2	1.7	1.3	2.0	2.0	2.0	1.9	.4									94	94	24	2
54/ 53		.8	2.1	1.7	2.1	2.7	2.1	1.1										95	95	45	16
52/ 51		.8	2.5	1.2	1.2	2.3	2.4	.4										81	81	63	15
50/ 49	.4	2.0	1.9	1.6	1.2	3.1	1.3	.1										88	88	95	40
48/ 47		2.1	1.2	.4	1.7	.9	.3	.4										53	53	99	33
46/ 45	.1	2.8	.3	.4	1.5	1.3	.7											53	53	95	69
44/ 43			.3	.3	.5	1.9	.4											25	26	91	66
42/ 41		.3	.1	.1	1.1	.9												19	19	84	66
40/ 39		.3			.7													7	7	48	40
38/ 37		.1			.3	.4												6	6	31	34
36/ 35					.1													1	1	21	42
34/ 33																				24	42
32/ 31																				11	39
30/ 29																				3	34
28/ 27																				3	47
26/ 25																					25
24/ 23																					23
22/ 21																					32
20/ 19																					20
18/ 17																					21
16/ 15																					17
14/ 13																					12
12/ 11																					4
10/ 9																					2
8/ 7																					1
4/ 3																					1
2/ 1																					3

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PAGE 2 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
0/ -1																					1
TOTAL	.5	11.2	31.7	10.9	19.1	22.6	18.9	6.7	3.1	.2								749	751	749	749

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2525946	40820	54.5	20.4	749							
Dry Bulb	2148118	38074	50.1	8.391	751			.7				84
Wet Bulb	1906764	33968	45.4	8.928	749		1.9					84
Dew Point	1628649	28872	38.5	10.764	749	.1	21.6					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — FEB MONTH

PAGE 1 — 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
72/ 71							.1			.4								4	4		
70/ 69					.1	.1	.4	.4	.1	.4	.1							13	13		
68/ 67					.1	.4	.9	.5	.4	.7	.3							25	25		
66/ 65				.1	.1	.8	2.2	.7	.4	.5								37	37		
64/ 63				1.0	.9	1.2	2.5	1.4	.5	.8	.1							65	65		
62/ 61			.7	1.0	1.7	2.1	2.6	2.2	1.3	.3	.3							93	93	1	
60/ 59		.1	1.0	2.5	2.0	2.8	3.4	1.7	2.4	.3								123	123	8	
58/ 57		.3	.4	1.6	2.0	2.6	1.8	2.8	.4									90	90	29	1
56/ 55		.5	.8	1.6	1.0	1.6	2.2	1.8										73	73	43	9
54/ 53		.9	2.0	.3	1.7	2.0	2.9	.5										78	78	71	18
52/ 51		1.2	.5	.7	.7	.5	.8	.3	.4									38	39	91	19
50/ 49		1.4	1.6	.3	.4	.1	1.7	1.0										50	50	111	54
48/ 47	.3	1.0	.4		.3	.7	1.6	.4										35	35	107	53
46/ 45	.1	.4	.5	.1	.3	.7	.7											21	21	96	56
44/ 43		.4			.4	.1												7	7	86	50
42/ 41		.4	.3	.1		.1	.3											9	9	42	53
40/ 39		.1																1	1	17	43
38/ 37																				27	46
36/ 35																				27	46
34/ 33																				3	47
32/ 31																				3	50
30/ 29																					26
28/ 27																					32
26/ 25																					39
24/ 23																					32
22/ 21																					28
20/ 19																					15
18/ 17																					6
16/ 15																					11
14/ 13																					10
12/ 11																					7
10/ 9																					1
8/ 7																					2
6/ 5																					3

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
4/ 3																					3
2/ 1																					2
TOTAL	.4	6.8	8.1	9.3	11.7	15.7	24.1	13.8	5.9	3.3	.8							762	763	762	762

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2131844	37816	49.620	.002	762							
Dry Bulb	2827264	43670	57.2	.041	763			4.6				84
Wet Bulb	1757968	30351	47.7	.090	762		.3					84
Dew Point	1093858	27634	36.2	.078	762		29.4					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — FEB MONTH

PAGE 1 — 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
72/ 71							.1		.1	.1								3	3		
70/ 69						.1	.1			.8								8	8		
68/ 67					.1	.1	.5	.5	.1	.7								16	16		
66/ 65			.1	.1		.5	1.4	.8	.4	.4	.1							30	30		
64/ 63			.3	.9	.8	1.8	1.3	1.0	.8	.4								56	56		
62/ 61		.1	.8	.8	.9	1.4	1.4	1.4	.7	.4								61	61	1	
60/ 59		.7	1.0	2.4	1.3	3.7	3.5	1.4	2.2	.4	.1							128	128	8	
58/ 57		.4	1.6	1.8	1.6	3.3	1.3	2.4	.5									98	98	22	4
56/ 55		.5	1.4	1.4	2.0	2.2	2.2	1.2										84	84	40	11
54/ 53		1.4	1.8	.4	2.5	1.4	2.6		.1									79	79	74	17
52/ 51		1.0	.9	1.0	1.6	.9	1.2	.1										52	52	91	24
50/ 49		2.4	1.2	.8	.4	.8	.8	.7										53	53	88	48
48/ 47		1.8	.5	.1	.1	.9	.3	.7										34	34	121	47
46/ 45	.3	.9	.1	.3	.7	.7	.7											27	27	102	61
44/ 43		.5	.1	.4	.5	.9	.1											20	20	87	51
42/ 41	.1	.4		.1	.3		.1											8	8	44	69
40/ 39			.1		.1	.1												3	3	27	47
38/ 37		.1			.1	.1												3	3	19	52
36/ 35																				25	53
34/ 33																				8	42
32/ 31																				2	33
30/ 29																				3	23
28/ 27																				1	36
26/ 25																					30
24/ 23																					42
22/ 21																					25
20/ 19																					9
18/ 17																					8
16/ 15																					6
14/ 13																					9
12/ 11																					1
10/ 9																					4
8/ 7																					3
6/ 5																					2

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) FEB (MONTH)

PAGE 2 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
4/ 3																					4
2/ 1																					2
TOTAL	.4	10.4	10.1	10.6	13.0	19.1	17.8	10.2	5.0	3.1	.3							763	763	763	763

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2413358	39931	52.320	6.607	763							
Dry Bulb	2428639	42787	56.1	6.197	763			3.0				84
Wet Bulb	1736971	36147	47.4	5.672	763		.7					84
Dew Point	1129870	28178	36.9	10.822	763		20.1					84

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | FEB MONTH

1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
68/ 67								.1										1	1		
66/ 65							.1	.1										2	2		
64/ 63						.1	.3	.1										4	4		
62/ 61		.1		.3	.1	.3												6	6		
60/ 59		.4	.3	1.0	.4	.3	.4	.1										22	22	1	
58/ 57		2.1	.9	.5	1.2	.8		.1										43	45	5	1
56/ 55		1.7	.8	1.6	1.3	.5	.3											47	47	21	6
54/ 53	.4	2.5	2.1	3.1	2.3	.6	.5	.1										90	91	38	22
52/ 51	.1	3.2	1.9	3.1	1.4	.8	.3											84	84	30	21
50/ 49	.3	4.9	4.8	3.1	3.6	1.6	.5											145	146	90	62
48/ 47	.5	4.0	1.7	1.9	1.7	1.8	.3											92	92	101	47
46/ 45	.1	3.1	2.2	1.8	1.8	1.0	.1											79	79	101	61
44/ 43	.3	1.0	1.4	1.6	1.2	.5												46	46	83	62
42/ 41	.1	.3	3.1	2.2	.5	.3												50	50	69	82
40/ 39		.3	1.3	.3	.8	.8												26	26	38	53
38/ 37		.1	.6	.3	.8	.1												16	16	57	47
36/ 35		.4	.1	.4	.1													8	8	44	42
34/ 33		.3		.3	.3													6	6	18	30
32/ 31			.1	.1														2	2	17	34
30/ 29			.1															1	1	11	32
28/ 27																				3	28
26/ 25																				3	22
24/ 23																					25
22/ 21																					11
20/ 19																					11
18/ 17																					6
16/ 15																					3
14/ 13																					11
12/ 11																					3
10/ 9																					3
4/ 3																					2
2/ 1																					1
TOTAL	1.8	24.4	21.7	21.6	17.9	9.8	2.7	.8										770	774	770	770

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3769278	52078	67.6	17.924	770							
Dry Bulb	1896191	38041	49.1	5.058	774		.3	.1				84
Wet Bulb	1534856	34040	44.2	6.248	770		3.7					84
Dew Point	1186799	29271	38.0	9.815	770		23.3					84

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — FEB MONTH

PAGE 1 — 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
66/ 65							.1											1	1		
64/ 63							.3											2	2		
62/ 61				.1														1	1		
60/ 59			.1		.3													3	3		
58/ 57		.5	.3	.3	.1	.8												15	15	1	
56/ 55	.1	.9	.5	.1														13	13	9	3
54/ 53	.1	3.9	.9	1.3	.5	.3												54	54	24	8
52/ 51	.1	1.8	1.4	1.6	.8	.1												45	45	30	27
50/ 49	.8	6.2	2.3	2.2	1.7	.4	.1											106	106	57	34
48/ 47	.9	4.1	2.2	1.2	2.2	1.6	.1											95	96	68	48
46/ 45	.5	6.2	1.8	.8	1.0	1.4												91	92	88	53
44/ 43	.6	3.2	3.2	2.1	1.0	.5												83	83	78	47
42/ 41	.3	4.7	3.6	2.3	2.1	.3	.1											103	104	77	75
40/ 39	.1	2.5	2.1	1.4	.6													52	52	73	55
38/ 37		2.5	1.4	.6	.5	.5												43	43	82	69
36/ 35		1.9	1.7	.1	.1	.1												31	31	72	38
34/ 33		.4	1.2	.8	.1													19	19	50	50
32/ 31	.3	.1	.4	.2	.3													10	10	26	67
30/ 29			.4	.3														5	5	17	40
28/ 27																				11	26
26/ 25																				8	25
24/ 23																				1	37
22/ 21																					22
20/ 19																					14
18/ 17																					11
16/ 15																					4
14/ 13																					4
12/ 9																					5
8/ 7																					4
6/ 5																					2
4/ 3																					3
0/ -1																					1
TOTAL	3.9	39.0	23.6	15.4	11.4	6.0	.8											772	779	772	772

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4248198	56212	72.8	18.084	772							
Dry Bulb	1614662	33088	42.2	4.097	778		1.6					84
Wet Bulb	1361997	32031	41.8	4.342	772		4.9					84
Dew Point	1090434	27986	36.2	9.951	772	.1	28.8					84

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAR MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
66/ 65		.1																1	1		
64/ 63		.1	.1	.1	.1	.5		.2		.1								11	11	1	
62/ 61	.1	.2	.4	.4	.1		.1	.4										14	14	3	3
60/ 59		.6	1.0	.9	.1	.5	.2		.1									28	28	3	2
58/ 57	.1	1.5	2.1	.7	.6	.1	.6	.1										48	48	16	3
56/ 55	.7	2.6	2.0	1.1	.4	.2	.2											59	59	36	23
54/ 53	1.2	3.4	3.4	.9		.5												77	77	60	32
52/ 51	.7	4.9	4.5	.9	.6	.4	.2											100	100	72	42
50/ 49	1.0	10.5	3.2	2.1	.9	.5	.2											150	150	118	103
48/ 47	.7	6.2	2.2	1.0	.5	.6	.1											93	94	130	98
46/ 45	1.3	5.1	1.1	1.8	.5	.1	.1											83	83	102	113
44/ 43	.7	2.9	1.6	1.0	.1													52	52	79	73
42/ 41	1.2	2.6	1.1	.6														45	46	57	67
40/ 39	.4	1.7	.7	.4		.2												28	28	39	52
38/ 37	.1	.7	.7		.4													16	16	41	34
36/ 35	.1	.6	.5		.2													12	12	19	40
34/ 33		.2			.1													3	3	13	35
32/ 31																				6	39
30/ 29																				3	19
28/ 27																				2	16
26/ 25																					4
24/ 23																					6
22/ 21																					5
20/ 19																					1
18/ 17																					1
16/ 15																					1
14/ 13																					6
12/ 11																					2
TOTAL	8.5	44.0	24.8	11.7	4.6	3.7	2.0	.7	.1	.1								820	822	820	820

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3419361	63[illegible]	79.6	14.432	820							
Dry Bulb	2042423	40683	49.5	5.914	822							93
Wet Bulb	1790994	38024	46.4	5.823	820		1.2					93
Dew Point	1360634	33148	42.9	8.135	820		11.3					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — MAR MONTH

PAGE 1 — 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
68/ 67								.1										1	1		
66/ 65							.1											1	1		
64/ 63					.2	.5	.2	.1										9	9		
62/ 61		.2		.4	.2	.1	.1	.2		.2								13	13		
60/ 59		.6	.2	1.0	.2	.1	.5	.1	.2									25	25	3	3
58/ 57		2.2	1.0	.9	.1	.2	.6											41	41	7	3
56/ 55	.2	1.3	1.1	1.7	.5	.6	.4											48	48	29	14
54/ 53	1.8	3.9	2.8	1.2	.2	.1	.2											85	85	59	33
52/ 51	1.0	2.6	3.6	1.3	1.0	.1	.1											79	79	56	40
50/ 49	1.8	8.5	3.3	1.2	.6	1.2	.6											141	142	106	51
48/ 47	1.3	5.3	2.3	1.1	.5	.6												91	91	130	101
46/ 45	1.2	4.4	1.3	2.1	.4	.4												80	80	101	103
44/ 43	.4	4.7	1.3	1.7	.9													70	70	78	73
42/ 41	1.5	3.8	1.2	1.1	.6													68	68	79	100
40/ 39		1.6	1.6	.5														30	30	64	43
38/ 37		.4	1.0	.1														12	12	39	37
36/ 35		.4	.7	.1	.4													13	14	33	46
34/ 33	.4		.1		.4													7	7	16	37
32/ 31				.1	.1													2	2	6	32
30/ 29																				3	25
28/ 27																				3	14
26/ 25																				4	19
24/ 23																					27
22/ 21																					4
16/ 15																					2
14/ 13																					3
10/ 9																					2
8/ 7																					1
6/ 5																					1
TOTAL	9.7	39.8	21.8	14.6	6.0	4.0	2.8	.6	.2	.2								816	818	816	816

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5166728	63270	77.5	17.886	816							
Dry Bulb	1981461	39969	48.8	8.103	818		.2	.1				93
Wet Bulb	1713033	37067	45.4	8.291	816		1.8					93
Dew Point	1458618	28781	41.4	8.376	816		14.8					93

USAFETAC FORM AWS 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAR MONTH

0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
68/ 67							.1		.1									2	2		
66/ 65					.2	.4	.4	.2		.1								11	11		
64/ 63		.2	.4	.2	.4	.4	.4	.4	.1	.1								21	21		
62/ 61		.4	.4	.5	.6	.5	.2	.0	.1									27	27	2	1
60/ 59		1.0	1.2	1.2	.7	.5	.4	.1	.2									44	44	6	3
58/ 57		1.5	2.1	1.5	.9	.7	.7	.2	.4									65	66	19	7
56/ 55	.1	3.1	1.5	1.7	.6	.9	.6											69	69	42	15
54/ 53	.9	3.2	3.6	2.2	1.2	.9	.6											102	102	72	27
52/ 51	.7	4.1	3.7	1.7	1.2	.2	.4	.1										99	99	84	58
50/ 49	2.2	7.1	3.2	1.1	1.1	.7	.6											131	132	131	95
48/ 47	.5	3.4	2.3	.6	1.1	.6												70	70	117	93
46/ 45	.6	2.9	.9	.9	.4	.6												51	51	91	84
44/ 43	.4	1.8	1.2	.7	.5													38	40	74	72
42/ 41	.9	1.5	1.4	.7	.4	.1												40	40	46	66
40/ 39	.1	1.0	.9	.9	.1													24	24	48	50
38/ 37			.5	.1	.1	.1												7	7	34	34
36/ 35		.5	.2	.1														7	7	22	36
34/ 33	.1		.1	.1	.1													4	4	14	35
32/ 31		.1		.1														2	2	4	43
30/ 29																				5	22
28/ 27																				1	17
26/ 25																				2	15
24/ 23																					21
22/ 21																					8
20/ 19																					4
18/ 17																					1
16/ 15																					2
14/ 13																					1
12/ 11																					1
10/ 9																					2
8/ 7																					1
TOTAL	6.5	31.8	23.8	14.5	9.7	6.6	4.4	1.7	1.0	.2								814	818	814	814

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4652290	39804	73.1	19.289	814							
Dry Bulb	2178548	41890	51.2	4.389	818		.2	.2				93
Wet Bulb	1817448	38133	46.9	3.990	814		1.4					93
Dew Point	1493249	34123	41.9	3.949	814		15.8					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — MAR MONTH

PAGE 1 — 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
78/ 77									.1				.1					2	2		
76/ 75								.2	.2	.1		.1						6	6		
74/ 73								.2	.1		.1			.1				5	5		
72/ 71						.4	.7	.8	.2	.1	.2		.1					20	20		
70/ 69				.1	.2	.7	.5	.6	.5	.7	.1							29	29		
68/ 67			.1	.4	1.2	2.1	1.5	1.1	1.0	.5	.4							67	67		
66/ 65			.1	1.3	1.7	1.1	1.3	.7	.5	.2	.4							61	61		
64/ 63		.1	1.0	1.7	3.1	3.4	1.8	1.8	1.1	.4	.2							118	119	4	
62/ 61		.4	1.1	2.1	4.0	1.8	1.5	.6	.4	.2								99	101	22	1
60/ 59		.2	2.8	5.4	2.8	1.8	1.5	1.6	.5	.2								138	139	51	5
58/ 57	.1	.6	1.6	3.3	2.7	1.3	.6	.6										89	89	71	20
56/ 55	.1	.2	1.7	1.6	.9	.6	.7	.9	.1									56	57	111	18
54/ 53		1.0	1.5	.7	.5	.9	.9	.1										45	45	139	54
52/ 51		1.5	.4	.4	.2	.9	.5	.1										32	32	128	63
50/ 49	.1	.2	.7	.2		.2	.6	.1										19	19	102	110
48/ 47		.1	.2	.4	.4	.1	.2	.1										13	13	57	105
46/ 45		.9		.1		.1												9	9	41	73
44/ 43	.1	.2			.1	.2												6	6	44	54
42/ 41		.1																1	1	20	67
40/ 39																				14	26
38/ 37																				4	35
36/ 35																				6	24
34/ 33																				1	23
32/ 31																					23
30/ 29																					21
28/ 27																					26
26/ 25																					9
24/ 23																					17
22/ 21																					6
20/ 19																					7
18/ 17																					8
16/ 15																					3
14/ 13																					4
12/ 11																					1

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33309 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAR MONTH

PAGE 2 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
10/ 9																						2
TOTAL	.5	5.6	11.3	17.8	17.9	15.8	12.1	9.6	4.8	2.6	1.5	.1	.2	.1					815	820	815	815

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2824367	43533	53.4	18.409	815							
Dry Bulb	3026960	49370	60.3	17.029	820			14.6	1.3			93
Wet Bulb	2813788	42254	51.8	15.319	815							93
Dew Point	1880484	35096	43.1	19.039	815		14.3					93

USAFETAC FORM 0-26-5 (OL A) AS 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAR (MONTH)

PAGE 1 1200-1400 (HOURS L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83											.1							1	1		
82/ 81									.1	.2	.1							4	4		
80/ 79									.1	.1	.1		.1		.1			5	5		
78/ 77								.1	.0	.4	.4		.1		.1			14	14		
76/ 75						.1	.1	1.1	.9	.7	.6	.5	.1	.4				37	37		
74/ 73						.4	.4	1.1	1.2	.9	.6	.1	.1					39	39		
72/ 71					.7	.2	.9	.5	1.1	.9	1.1	.2	.1					47	48		
70/ 69					.6	1.3	1.1	.9	1.7	1.0	.9	.4						64	65		
68/ 67			.2	.2	2.5	2.5	3.1	2.8	1.1	2.2	.6	.4						127	127		
66/ 65			.2	.6	3.3	2.6	2.6	.7	.7	.1	.2							91	91	3	
64/ 63			.1	1.2	2.2	4.2	2.8	1.2	.7	.5	.1							107	108	20	
62/ 61		.4	.5	1.6	2.0	1.6	1.5	.1	.1	.1	.1							65	65	41	2
60/ 59		.2	.5	3.2	1.5	.7	.2	1.0	.7									66	66	68	7
58/ 57		.4	1.1	1.5	.2	.5	.6	.5	.2									41	42	108	18
56/ 55		.5	1.1	.9	.4	.2	1.0		.1									34	34	123	19
54/ 53		.6	1.0	.7	.2	.2	.4	.0										31	31	152	43
52/ 51		.5	.6		.4	.1	.1											14	14	114	63
50/ 49			.5	.2	.1	.1	.4	.1										12	12	65	123
48/ 47	.1	.4			.1													5	5	39	93
46/ 45	.2	.4																5	5	25	83
44/ 43	.2	.2																4	4	23	54
42/ 41	.1	.1																2	2	14	37
40/ 39																				6	43
38/ 37																				4	30
36/ 35																					27
34/ 33																					26
32/ 31																					42
30/ 29																					18
28/ 27																					13
26/ 25																					9
24/ 23																					7
22/ 21																					6
20/ 19																					16
18/ 17																					5

Element (X)	$\Sigma_{X'}$	Σ_{X}	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AUG 74 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAR MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
16/ 15																					7
14/ 13																					3
12/ 11																					1
6/ 5																					1
TOTAL	.7	3.7	5.9	10.2	14.2	14.8	15.1	10.8	9.6	7.1	5.0	1.6	.6	.4	.2			815	819	815	815

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2266916	40206	49.3	18.861	815							
Dry Bulb	3448118	52832	64.8	6.998	819			38.6	11.4	.7		93
Wet Bulb	3366778	43723	53.6	5.095	815							93
Dew Point	1388317	35097	43.1	9.341	815		14.5					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE AWS 94

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAR (MONTH)

PAGE 1 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
82/ 81											.6	.2							7	7		
80/ 79											.1	.1							2	2		
78/ 77								.1	.4	.7	.1	.1	.1		.1				14	14		
76/ 75							.2	.6	.6	.6	.5	.5	.4						28	28		
74/ 73						.1	.7	1.1	.7	.1	.4								26	26		
72/ 71				.1	.6	.1	1.0	.6	.7	.5	.9	.2							39	39		
70/ 69				.2	.9	1.1	1.0	.6	1.7	.7	.6	.6							61	61		
68/ 67			.1	.4	1.1	3.1	2.7	1.6	1.0	.9	.5								92	92		
66/ 65			.2	1.2	2.0	2.8	2.8	.6	1.1	.1	.1								90	90	1	
64/ 63			.4	1.7	3.4	3.0	1.4	1.8	.7	.1	.4								105	105	18	1
62/ 61			1.1	2.5	3.6	2.8	.9	.5	.4	.1									96	97	34	2
60/ 59		.1	1.0	3.1	2.1	1.0	1.6	.6	.2	.4									82	82	79	5
58/ 57		.1	2.0	2.1	1.0	.1	.4	.4	.2	.1									52	53	96	22
56/ 55		.9	1.7	.7	.4	.6	.4	.5											42	42	126	30
54/ 53	.1	.5	1.5	.6	.6	.4	.2	.1											33	33	149	39
52/ 51		.6	.6	.4	.2		.4	.1											19	19	118	72
50/ 49	.1	.6	.1	.1			.1	.1											10	10	77	128
48/ 47		.6	.1																6	6	46	90
46/ 45		.4	.1				.1												5	5	30	78
44/ 43		.2					.1												3	3	18	66
42/ 41																					13	69
40/ 39																					2	33
38/ 37			.1																1	2	3	28
36/ 35																					1	27
34/ 33																					2	24
32/ 31																						23
30/ 29																						21
28/ 27																						8
26/ 25																						11
24/ 23																						10
22/ 21																						5
20/ 19																						8
18/ 17																						2
16/ 15																						5

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAR MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
14/ 13																					4
10/ 9																					1
-4/ -5																					1
TOTAL	.2	4.1	9.1	13.2	15.9	15.1	14.0	9.5	7.9	4.4	4.2	1.8	.5		.1			816			813
																	813		813		

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3809364	42600	52.4	18.476	813							
Dry Bulb	3330470	51826	63.5	6.907	816			30.7	8.8	1.0		93
Wet Bulb	2352774	43548	53.6	4.981	813							93
Dew Point	1640184	35762	44.0	9.136	813	.1	11.3					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAR MONTH

PAGE 1 | 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
76/ 75									.1									1	1		
72/ 71							.2											2	2		
70/ 69						.2					.1							3	3		
68/ 67			.1	.6	.8	.8	.4	.4	.2	.1								29	29		
66/ 65		.1	.4	.4	1.2	.5	.4	.2	.1	.2								29	29		
64/ 63		.1	.7	1.2	1.0	.5	.6	.2	.2	.1								39	39	2	
62/ 61		1.1	2.1	3.3	1.4	.5	.6	.2	.1									77	77	15	3
60/ 59	.1	1.9	4.0	5.7	1.7	1.2	.8	.4										131	131	34	5
58/ 57	.1	2.4	3.7	3.0	2.4	1.2	.4	.1										116	117	60	33
56/ 55		2.5	4.7	2.7	1.2	.5	.1	.2										99	100	105	32
54/ 53	.2	2.8	5.5	1.8	1.2	.5	.2	.1										103	103	130	58
52/ 51		2.7	3.0	.7	.5	.1	.1											59	60	126	84
50/ 49	.2	3.3	1.8	1.6	.7	.5	.2											69	70	128	151
48/ 47	.2	1.6	.8	.6	.6		.1											33	33	91	114
46/ 45	.1	1.1	.2	.7	.4													21	21	57	83
44/ 43		.6	.2	.2		.2												11	12	25	56
42/ 41		.1		.2		.4												6	6	28	52
40/ 39					.1													1	1	16	36
38/ 37																				4	21
36/ 35																				2	29
34/ 33																				2	16
32/ 31																				4	15
30/ 29																					17
28/ 27																					6
26/ 25																					4
24/ 23																					3
22/ 21																					3
20/ 19																					1
18/ 17																					1
16/ 15																					6
TOTAL	1.1	20.3	27.4	23.3	13.3	7.1	4.2	1.9	.8	.5	.1							829	834	829	829

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.
Rel. Hum.	4232276	88396	70.4	16.295	829
Dry Bulb	2668874	46913	56.3	5.693	834
Wet Bulb	2185248	42247	51.1	5.198	829
Dew Point	1805418	38157	46.0	7.703	829

Mean No. of Hours with Temperature	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb			3.9	.1			93
Wet Bulb		.4					93
Dew Point		6.3					93

USAFETAC FORM 0-26-5 (OL A) 3/X 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAR MONTH

2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
68/ 67					.1	.1												2	2		
66/ 65										.2								2	2		
64/ 63		.1	.1			.2	.1	.1		.1								7	7		
62/ 61	.1	.5	.4	.4	.2	.1			.1									15	15	3	2
60/ 59	.1	1.0	2.9	1.1	.1		.8	.2										52	52	8	5
58/ 57	.2	2.4	1.9	.4	.2	.2	.1	.4										49	49	21	7
56/ 55	.4	3.4	3.2	2.7	1.1		.2		.1									91	91	43	21
54/ 53	1.0	5.2	6.2	1.3	.7	.4	.4											125	125	78	47
52/ 51	.6	5.6	5.1	1.1	.4	.5	.1											112	113	92	59
50/ 49	.6	8.3	3.0	.8	.1	.5												110	110	144	111
48/ 47	.5	6.1	1.6	1.0	.1	.1	.2											79	79	146	101
46/ 45	.5	5.8	2.2	.5		.2	.1											77	78	94	126
44/ 43	.4	3.3	.2	.7														38	39	68	89
42/ 41	.2	1.7	1.6	.4														32	32	48	68
40/ 39		1.5	.6		.4													20	21	28	41
38/ 37		.2	.8		.4													12	12	25	32
36/ 35		.1																1	1	14	33
34/ 33																				6	19
32/ 31																				3	18
30/ 29																				1	15
28/ 27																					13
26/ 25																					7
24/ 23																					4
22/ 21																					1
18/ 17																					2
16/ 15																					7
14/ 13																					1
TOTAL	4.6	45.4	29.9	10.2	3.9	2.4	2.2	.7	.2	.4								824		824	
																		824		824	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9417194	65630	79.6	15.190	824							
Dry Bulb	2175076	42190	51.0	5.533	828			.2				93
Wet Bulb	1904492	39368	47.8	5.357	824		.7					93
Dew Point	1670136	36572	44.4	7.352	824		7.1					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | APR MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
76/ 75									.1	.1								2	2		
74/ 73							.3	.1										3	3		
72/ 71					.1	.1		.3										4	4		
70/ 69					.1	.5												5	5		
68/ 67				.3	.4	.5	.3	.4										14	14		
66/ 65			.4	.1	.8	.4	.6		.3									20	20	1	
64/ 63		.9	.9	1.3	.6	.6	.1	.1	.1									37	37	2	
62/ 61	.1	3.3	1.3	1.2	1.3	.1												58	58	20	5
60/ 59	.6	4.3	2.5	1.0	.4	.1												71	71	50	26
58/ 57	.9	7.2	2.2	.9	.3													90	90	93	46
56/ 55	1.4	7.1	4.1	1.0	.3													109	109	117	79
54/ 53	1.8	8.8	3.8	.8	.1													120	122	121	101
52/ 51	1.6	5.8	1.6	.1	.5													77	77	126	109
50/ 49	1.1	9.8	2.7	.3		.1	.1											111	113	115	102
48/ 47	.4	3.6	.3	.1		.1												35	35	70	89
46/ 45	.6	1.6	.1	.1														20	20	47	82
44/ 43	.1	.8	.3															9	9	9	40
42/ 41		.1	.1															2	2	10	20
40/ 39																				3	10
38/ 37		.1																1	1	3	6
36/ 35																				1	2
34/ 33																					3
32/ 31																					4
28/ 27																					1
26/ 25																					1
24/ 23																					1
22/ 21																					1
TOTAL	8.8	53.4	20.2	7.2	4.8	2.7	1.4	.9	.2	.1								788	792	788	788

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5678016	68990	83.7	13.887	788							
Dry Bulb	2450794	43834	55.3	5.898	792			3.2	.6			90
Wet Bulb	2192081	41415	52.6	4.858	788							90
Dew Point	2002207	39499	50.1	5.322	788		.9					90

USAFETAC FORM 0-26-5 (OL A) 3/X 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | APR MONTH

PAGE 1 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
80/ 79											.1							1	1		
78/ 77										.1	.1							2	2		
72/ 71							.1	.3										3	3		
70/ 69						.3				.1								3	3		
68/ 67			.1	.1	.4	.5	.4	.1	.3									15	15		
66/ 65				.3	.5	.3	.8	.1										15	15		
64/ 63		.1	.3		.5	.8	.3	.1										16	16	2	
62/ 61		1.8	.8	1.5	.5	.4	.3	.4										44	44	4	2
60/ 59	.8	4.8	1.3	.9	.3	.5	.3	.1										70	70	41	21
58/ 57	.5	7.3	1.5	1.1	.8		.1											90	90	69	41
56/ 55	.8	6.3	2.0	.6	.1	.1												79	79	91	69
54/ 53	2.3	7.3	4.3	.8	.1													117	117	107	71
52/ 51	2.1	7.1	2.3	.3	.3													96	96	123	106
50/ 49	2.1	10.0	2.0	.4	.4													119	119	146	131
48/ 47	1.1	5.5	.6	.3		.1												61	61	98	100
46/ 45	.6	4.1	.3	.1	.3	.1												44	44	60	94
44/ 43	.1	1.5																13	13	33	67
42/ 41	.1	.9		.3														10	10	14	50
40/ 39																				4	12
38/ 37		.1																1	1	3	11
36/ 35																				4	6
34/ 33																					8
32/ 31																					3
30/ 29																					1
28/ 27																					4
20/ 19																					2
TOTAL	10.9	56.7	15.3	6.5	4.0	3.0	2.1	1.1	.3	.3	.3							799	799	799	799

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. hum.	3839864	67244	84.2	15.044	799							
Dry Bulb	2353338	43116	54.0	8.784	799			2.7	.3			90
Wet Bulb	2116404	40950	51.3	4.703	799							90
Dew Point	1928222	38980	48.8	3.767	799		1.1					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — APR MONTH

PAGE 1 — 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
82/ 81									.1									1	1		
78/ 77							.1			.1								2	2		
76/ 75							.4	.5	.1		.1							9	10		
74/ 73						.3	.1	.3										5	5		
72/ 71					.6	.3	.5	.1	.1									13	13		
70/ 69				.1	.5	1.0	.4	.1	.6									22	22		
68/ 67			.6	1.2	1.0	.6	1.0	.3	.1	.1								39	39		
66/ 65		.3	2.4	1.3	1.3	.3	.6	.3										50	51	3	
64/ 63		.8	2.3	3.6	1.5	1.7	.5	.1	.1									83	83	24	1
62/ 61		4.0	3.5	2.2	1.0	.1		.1										85	85	55	12
60/ 59	.4	5.9	3.2	2.4	.8	.5	.1	.1										105	105	94	58
58/ 57	.9	4.9	3.8	1.4	1.0	.5	.4	.1										102	102	132	71
56/ 55	.6	3.7	3.2	.6	.5													68	68	108	93
54/ 53	1.3	3.3	2.4	.9	.1	.1												64	64	114	94
52/ 51	.3	4.2	.9	.4	.1													46	46	79	108
50/ 49	.5	3.4	1.0	.4	.1													58	58	83	126
48/ 47	.5	1.5	.5			.1												21	21	50	72
46/ 45	.1	.4																4	4	24	49
44/ 43		.3																2	2	11	27
42/ 41	.1			.1														2	2	2	30
40/ 39																					12
38/ 37																				1	10
36/ 35																				1	5
34/ 33																					4
32/ 31																					4
30/ 29																					2
28/ 27																					1
26/ 25																					1
24/ 23																					1
TOTAL	4.7	34.6	23.9	14.6	8.7	5.5	4.2	2.0	1.3	.3	.1							781	784	781	781

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	48306[illegible]	60069	76.9	14.429	781							
Dry Bulb	2788818	46211	58.9	9.395	784			10.6	2.1	.1		90
Wet Bulb	2345079	42697	54.6	9.091	781							90
Dew Point	2087958	39817	51.0	8.991	781		1.0					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | APR MONTH

0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
94/ 93															.1			1	1		
90/ 89										.1								1	1		
88/ 87											.1							1	1		
86/ 85									.1	.3	.4	.1			.1			8	8		
84/ 83									.3	.9	.4	.1		.1				14	14		
82/ 81								.5	.6	1.1	.8	.1	.1					26	26		
80/ 79							.5		.8	.8	.4	.1						20	20		
78/ 77							1.4	1.0	1.4	.9	.4	.1	.1					42	43		
76/ 75						.9	1.1	1.0	1.1	.5	.4							40	40		
74/ 73					.1	.8	1.3	1.8	.8	.9	.1	.1						46	46		
72/ 71					1.5	2.1	2.1	1.5	.4	.1								62	62	2	
70/ 69			.1	.4	1.9	1.9	2.0	.6	.5	.4								62	62	2	
68/ 67			.4	3.4	4.4	5.9	2.6	.6	.6	.3								145	145	17	
66/ 65		.1	1.5	3.1	2.9	2.4	.6	.4	.1									89	89	37	
64/ 63		.3	2.0	2.6	2.4	1.3	1.3	.9	.1									86	86	81	3
62/ 61		.6	1.8	2.4	1.5	.6	.4	.1		.1								60	60	129	11
60/ 59		1.1	2.1	1.8	.8	.3		.3										50	50	152	64
58/ 57		.3	1.1		.4	.1	.1											16	16	164	82
56/ 55		.4	.9	.3	.4													15	15	80	91
54/ 53	.1	.6	.5															10	10	59	112
52/ 51	.1	.4																4	4	44	93
50/ 49																				23	124
48/ 47																				5	54
46/ 45																				2	54
44/ 43																				1	28
42/ 41																					27
40/ 39																					19
38/ 37																					11
36/ 35																					7
34/ 33																					6
32/ 31																					5
30/ 29																					3
28/ 27																					2
26/ 25																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
22/ 21																					1
TOTAL	.3	3.8	10.4	13.9	16.2	16.2	13.4	8.6	6.8	6.3	2.9	.8	.3	.1	.3			798	799	798	798

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2759829	48012	86.4	14.492	798							
Dry Bulb	3768378	54893	68.7	6.920	799			52.8	22.5	6.8	.1	90
Wet Bulb	2757067	46788	58.6	4.210	798			2.4				90
Dew Point	2109618	40679	51.0	6.332	798		1.4					90

USAFETAC FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
96/ 95														.1		.1		2	2		
94/ 93													.5			.1		5	5		
92/ 91												.4	.1	.3				6	6		
90/ 89											.1	.3	.6		.1			9	9		
88/ 87										.1	.3	.8	.8	.1				16	16		
86/ 85									.1	.5	.6	.6	.6	.4	.1			24	27		
84/ 83								.1	.1	1.0	.6	.9	.3	.3				26	26		
82/ 81								.6	.8	1.3	1.2	1.0	.5					42	42		
80/ 79							.4	1.0	.5	.8	1.3	.5	.1					36	36		
78/ 77						.5	.5	1.6	1.4	2.5	.9							57	57		
76/ 75						.3	1.4	.9	1.3	.5	.8							40	40		
74/ 73				.1	.6	1.8	1.8	1.6	1.8	.4	.1							64	64		
72/ 71					1.6	1.8	3.2	3.0	.5	.4								81	81	2	
70/ 69			.1		2.1	3.5	3.6	1.4	.5	.1	.1	.1						90	91	14	
68/ 67			.6	1.2	3.5	3.2	2.6	1.0	.8	.5	.1							105	108	26	
66/ 65		.4	.9	1.6	.5	1.2	.6	.4	.5									47	47	65	
64/ 63		.5	.8	1.0	.5	1.2		.3	.1									34	34	90	4
62/ 61		.3	.9	.5	1.2	.5	.3	.1										29	29	145	19
60/ 59		1.0	.8	.9	.4	.1												25	25	195	48
58/ 57		1.0	.6	.1														14	14	118	63
56/ 55		.6	.5															9	9	67	89
54/ 53		.4	.5															7	7	47	80
52/ 51		.6																5	5	27	95
50/ 49			.1															1	1	15	113
48/ 47																				3	83
46/ 45																					64
44/ 43																					28
42/ 41																					91
40/ 39																					15
38/ 37																					13
36/ 35																					15
34/ 33																					9
32/ 31																					1
30/ 29																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PAGE 2 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
24/ 29																					3
TOTAL		4.9	5.9	5.4	10.3	14.1	14.5	12.0	8.5	8.1	6.2	4.7	3.6	1.2	.2	.3		774	779	774	774

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2160717	38887	49.8	17.911	774							
Dry Bulb	4096469	56109	72.0	8.262	779			70.8	38.1	10.2	.8	90
Wet Bulb	2780336	44870	59.8	4.301	774			4.9				90
Dew Point	2002816	39084	50.5	4.466	774		.8					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) APR (MONTH)

PAGE 1 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
96/ 95														.1				1	1		
94/ 93													.1					1	1		
92/ 91													.1			.1		2	2		
90/ 89										.1			.8	.3				9	9		
88/ 87											.3	.5	.5					10	10		
86/ 85									.1	.4	.5	1.3	.3	.1	.1			22	22		
84/ 83								.3	.4	1.0	.8	.9	.3	.3				30	30		
82/ 81								.4	1.3	.9	.9	.5	.1	.3				34	34		
80/ 79							.1	.3	1.0	1.4	.4	.4	.1					29	29		
78/ 77					.1		.5	1.0	1.4	1.3	1.0	.4						50	50		
76/ 75						.1	1.9	.9	1.1	.8	.4	.1						42	42		
74/ 73					.3	1.5	1.9	2.3	1.3	.9	.3							66	66		
72/ 71					1.5	2.3	2.4	1.9	.8									70	70	2	
70/ 69				.8	1.8	2.1	3.4	.4	.1	.1	.1							70	70	8	
68/ 67			.3	1.8	3.3	3.4	2.6	.8	.3	.3								100	100	20	
66/ 65			.8	1.9	2.5	2.0	1.1	.4	.6									74	74	54	
64/ 63		.1	1.0	2.1	1.0	1.5	.8	.8		.3								60	60	92	3
62/ 61		.5	.8	1.3	.9	.9	.1											35	35	127	8
60/ 59	.1	1.4	1.5	1.8	.8													44	44	156	45
58/ 57		.9	.8	.1	.1	.1		.1										17	17	140	68
56/ 55		.9	.4	.4														13	13	95	103
54/ 53		1.3																10	10	43	94
52/ 51	.1	.3																3	3	38	106
50/ 49	.3																	2	2	15	113
48/ 47																				3	80
46/ 45																					55
44/ 43																				1	39
42/ 41																					30
40/ 39																					16
38/ 37																					5
36/ 35																					12
34/ 33																					6
32/ 31																					6
30/ 29																					1

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 84 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | APR MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
28/ 27																						2
26/ 25																						1
24/ 23																						1
TOTAL	.5	5.3	9.4	10.1	12.2	14.0	14.9	9.9	8.3	7.3	4.5	4.0	2.3	1.0	.1	.1			794			794
																			794		794	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2420843	413868	52.2	17.921	794			60.8	33.6	14.1	.2	90
Dry Bulb	3999107	68977	70.2	8.198	794			87.4				90
Wet Bulb	2796644	47002	59.2	4.248	794							90
Dew Point	2055156	40106	50.5	6.161	794		1.8					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | APR MONTH

PAGE 1 | 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85								.1		.1	.1							3	3		
84/ 83											.4							3	3		
82/ 81								.1	.3									3	3		
80/ 79								.2	.1		.1							4	4		
78/ 77						.1	.4	.5	.5	.1	.1							14	14		
76/ 75						.1	.4	.4	.6	.1	.1							15	15		
74/ 73					.3	.5	.6	.5	.5	.3								22	22		
72/ 71			.1		1.0	.6	1.9	.9	.3									38	38	1	
70/ 69				.3	1.1	1.4	1.3	.5	.1									37	37		
68/ 67			.8	1.8	3.7	2.6	1.8	.3										86	86	7	
66/ 65		.4	2.0	4.7	2.6	.9	.5											88	88	12	1
64/ 63		1.9	2.6	4.0	3.1	1.0	.3	.3										105	105	43	3
62/ 61		1.5	3.5	5.2	1.4	.4	.3	.1										98	98	100	21
60/ 59	.1	3.1	5.0	4.4	1.3	.5		.1										116	117	122	41
58/ 57		2.6	2.1	1.9	.4	.4		.1										60	60	164	70
56/ 55	.4	3.3	1.0	.3	.3	.1		.1										43	43	153	117
54/ 53	.1	2.8	.9	.4	.1													34	34	95	127
52/ 51		1.6	.3															15	15	48	136
50/ 49		.8																6	6	32	134
48/ 47	.1	.1			.1													3	3	10	59
46/ 45				.1														1	1	3	36
44/ 43																				1	11
42/ 41																				2	15
40/ 39																				1	10
38/ 37																					3
36/ 35																					3
34/ 33																					2
32/ 31																					2
28/ 27																					1
24/ 23																					2
TOTAL	.8	18.1	18.4	22.9	15.4	8.7	7.4	4.3	2.3	.6	.9								795		794
																		794		794	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3970281	54683	68.9	16.049	794							
Dry Bulb	3216813	50315	63.3	6.389	795							90
Wet Bulb	2597834	43298	57.1	4.090	794			.9				90
Dew Point	2175421	41357	52.1	5.178	794		.6					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | APR MONTH

PAGE 1 | 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
78/ 77										.3								2	2		
76/ 75									.1									1	1		
74/ 73							.3											2	2		
72/ 71						.1												1	1		
70/ 69				.1		.1	.4	.4										8	8		
68/ 67			.4		.6	.5	.1	.6	.3									20	20		
66/ 65			.3	.9	1.0	.1	.3	.1	.1									22	22		
64/ 63		1.1	1.9	3.3	.5	.8												60	61	6	1
62/ 61		2.7	3.8	3.2	1.4													87	87	23	6
60/ 59	.4	7.3	4.4	2.9	.9	.3												128	129	76	37
58/ 57	.5	7.5	4.8	1.8	.3	.1												118	119	124	58
56/ 55	.6	7.8	2.8	1.1	.2	.1												109	109	143	97
54/ 53	1.1	7.5	2.7	.4	.1		.1	.1										95	95	150	192
52/ 51	.4	4.2	1.3	.1	.1		.1											49	51	101	114
50/ 49	.8	5.3	1.0	.1														57	58	89	145
48/ 47	.6	1.5	.1	.1														19	20	48	90
46/ 45		.8	.3	.1														9	9	15	51
44/ 43		.2	.1															3	3	4	24
42/ 41		.1																1	1	7	17
40/ 39																				3	8
38/ 37																					2
36/ 35																					2
34/ 33																					2
32/ 31																					1
30/ 29																					1
24/ 23																					3
TOTAL	4.4	46.0	24.8	14.2	5.2	2.1	1.3	1.2	.5	.3								791	798	791	791

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3369444	64300	81.2	13.428	791							
Dry Bulb	2023692	43669	57.2	5.860	798			3.8	.6			90
Wet Bulb	2319286	42068	53.9	4.199	791							90
Dew Point	2091681	40482	51.2	4.971	791		.6					90

USAFETAC FORM 0-26-5 (OL A) 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

OLD AWS-3 AND 3A-7 (MAY 60) WILL BE USED UNTIL EXHAUSTED. U.S. GOVERNMENT PRINTING OFFICE: 1960 O-576-

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAY MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
82/ 81								.1										1	1		
80/ 79									.1									1	1		
78/ 77								.4										3	3		
76/ 75							.1	.3		.1								4	4		
74/ 73					.1	.3	.4			.3								8	8		
72/ 71			.3		.6	.3	.3											11	12		
70/ 69		.3	1.1	.3	.8	.1	.1	.6	.3									28	28		
68/ 67	.1	2.2	4.5	2.4	.5	.1	.1											78	79	14	4
66/ 65		4.3	1.8	1.3	.4	.3	.4											66	67	32	16
64/ 63	.1	8.3	2.6	.5	.4	.1												94	95	95	60
62/ 61	1.3	11.5	2.7	.8		.4	.1											131	131	122	80
60/ 59	1.8	11.7	3.1	.8		.4												139	139	146	129
58/ 57	1.9	8.7	1.4	.3	.4		.1											100	101	135	148
56/ 55	.9	5.7	.8	.4	.1													62	62	117	108
54/ 53	1.3	2.4	1.0	.4														40	40	65	111
52/ 51	.4	1.1	.1															13	13	30	45
50/ 49	.3	.4																5	5	24	32
48/ 47																				4	19
46/ 45																					7
44/ 43																					9
42/ 41																					11
40/ 39																					3
38/ 37																					1
34/ 33																					1
TOTAL	8.0	56.6	19.3	7.0	3.2	1.9	1.7	1.4	.4	.4								784	789		784
																				784	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.
Rel. Hum.	5816204	66750	85.1	13.037	784
Dry Bulb	2990711	48417	61.4	4.987	789
Wet Bulb	2702991	45925	58.6	4.041	784
Dew Point	2521028	44289	56.5	4.938	784

Mean No. of Hours with Temperature	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb			16.0	2.0	.1		93
Wet Bulb			1.7				93
Dew Point			.5				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

 0300-0500 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
88/ 87											.1							1	1		
76/ 75					.1		.1											2	2		
74/ 73					.3		.4	.1	.1									7	7		
72/ 71				.1		.6	.5	.1	.3									13	13		
70/ 69			.8	.5	.5			.1	.1									16	16		
68/ 67		.1	1.0	1.3	.5			.3										25	25	3	
66/ 65		2.6	1.8	.8	.1	.4	.4											47	47	14	1
64/ 63	.4	4.7	2.8	1.3	.1	.6	.1											79	79	54	22
62/ 61	1.2	6.9	2.1	.4		.3	.1											85	85	91	58
60/ 59	4.0	16.4	3.6	.8	.1	.1	.1	.1										197	197	139	137
58/ 57	3.2	11.4	.6	.4	.1													123	123	156	142
56/ 55	2.8	7.3	.1	.9	.4													90	91	149	145
54/ 53	1.3	5.1	.6	.8														61	61	86	105
52/ 51	.6	1.7	.3		.1													21	21	38	80
50/ 49	.9	.8																13	13	41	90
48/ 47																				8	17
46/ 45																					10
44/ 43																				1	14
42/ 41																					14
40/ 39																					1
38/ 37																					1
36/ 35																					1
34/ 33																					2
TOTAL	14.4	57.1	13.7	7.2	2.4	2.1	1.8	.8	.5		.1								781		780
																		780		780	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.
Rel. Hum.	5999666	476264	86.7	13.152	780
Dry Bulb	2799528	466077	59.7	4.831	781
Wet Bulb	2570898	446788	57.3	3.886	780
Dew Point	2408862	431888	55.4	4.780	780

Mean No. of Hours with Temperature	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.							
Dry Bulb			7.6	1.2	.1		93
Wet Bulb			.4				93
Dew Point							93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — MAY MONTH

PAGE 1 — 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
90/ 89											.1								1	1		
88/ 87													.1						1	1		
86/ 85										.1	.1	.1	.1						4	5		
84/ 83							.3			.1		.1		.1					5	5		
82/ 81								.6	.3										7	7		
80/ 79					.1	.3	.4	.5	.4	.1	.1								15	15		
78/ 77					.9	.8	.5	.6	.4	.1	.1								27	28		
76/ 75				.4	1.2	.8	.8	.6	.1	.3									32	32		
74/ 73				1.3	2.0	1.3	.5	.3	.1										43	44		
72/ 71			1.4	3.5	3.8	.9	.6	.4	.3										85	85	4	
70/ 69		.8	3.6	3.8	2.9	.8	.4	.3	.1										99	99	21	
68/ 67	.1	1.3	6.5	5.1	2.0	.4	.3												123	123	57	7
66/ 65	.4	3.6	5.5	1.5	.5	.1	.1		.1										93	93	124	46
64/ 63	.6	3.5	2.4	1.5	.5	.1	.1												69	69	185	101
62/ 61	.1	6.1	2.3	.9	.3														76	76	135	124
60/ 59	.8	3.7	2.2	.1	.1														54	54	115	174
58/ 57	.3	2.3	.4																23	23	73	120
56/ 55	.1	1.2	.3	.1	.1														14	14	38	74
54/ 53		.8	.3																8	8	17	49
52/ 51		.3																	2	2	8	33
50/ 49																					4	19
48/ 47																						12
46/ 45																						10
44/ 43																						8
42/ 41																						1
38/ 37																						1
36/ 35																						1
32/ 31																						1
TOTAL	2.4	23.4	24.8	18.3	14.6	5.4	4.0	3.3	1.8	.8	.5	.3	.3	.1					781	784	781	781

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4534081	38811	74.7	15.211	781							
Dry Bulb	3996061	32879	67.4	6.137	784			52.8	16.4	2.4		93
Wet Bulb	3016695	48445	62.0	3.869	781			9.8				93
Dew Point	2682764	45620	58.4	4.803	781		.1	.8				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — MAY MONTH

PAGE 1 — 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
100/ 99																.1		1	1		
98/ 97														.1		.1		2	2		
96/ 95													.1				.3	3	3		
94/ 93													.3	.1		.1		4	4		
92/ 91											.1	.1		.4				5	5		
90/ 89										.1	.1	.5	.5	.4	.4			16	16		
88/ 87										.1	1.1	.8	.4	.1	.1			21	21		
86/ 85								.1	.6	1.3	1.4	.4	.4	.1	.1			35	35		
84/ 83							.4	.6	1.1	1.8	1.5	.4		.3				48	49		
82/ 81						.4	.5	2.2	1.5	1.3	.5	.3	.1					54	54		
80/ 79						2.3	2.0	1.8	2.2	.1	.5							70	70		
78/ 77			.1		.9	4.1	5.7	3.5	1.0	.5		.4	.3					130	130		
76/ 75					1.8	4.7	4.6	.9	.5	.9	.1							106	106		
74/ 73				.4	3.3	4.3	1.6	.6	.3	.1	.1							85	85	3	1
72/ 71				1.4	4.3	1.6	1.1	.3	.1									70	70	10	
70/ 69		.1	.6	2.2	1.9	1.4	.1			.3								52	52	64	
68/ 67		.1	1.4	1.5	2.2	.5												45	45	135	5
66/ 65		.4	.8	.8	.3													17	17	196	14
64/ 63	.1	.4	.4	.4	.3													12	12	196	62
62/ 61		.3	.1	.1														4	4	88	99
60/ 59		.6	.1															7	7	60	180
58/ 57																				23	111
56/ 55		.1																1	1	8	106
54/ 53		.3																2	2	4	77
52/ 51																				3	43
50/ 49																					23
48/ 47																					16
46/ 45																					16
44/ 43																					10
42/ 41																					7
40/ 39																					7
38/ 37																					3
36/ 35																					3
34/ 33																					5

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Wet Bulb												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

PAGE 2 0900-1100 (HOURS L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
32/ 31																						1
30/ 29																						1
TOTAL	.1	2.4	3.5	6.7	14.8	19.2	16.1	10.1	7.3	6.5	5.6	2.8	2.0	1.5	.6	.4	.3		790	791	790	790

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2411172	41848	52.9	15.696	790							
Dry Bulb	4042097	60369	76.3	6.632	791			87.9	68.3	25.4	1.2	93
Wet Bulb	3287893	50895	64.4	5.327	790			25.0	.4			93
Dew Point	2556102	44699	56.6	5.849	790		.2	.7	.1			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

PAGE 1 1200-1400 (HOURS L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
100/ 99																.3	.3	4	4		
98/ 97														.1			.6	6	6		
96/ 95												.1		.4	.8	.4	.4	16	16		
94/ 93											.1	.3	.3	.5	.3	.4	.3	16	16		
92/ 91										.3	.3	.9	.6	1.0	.8		.1	31	31		
90/ 89								.1	.3	.3	.8	1.1	1.5	.8	.3	.3		42	42		
88/ 87								.1	.5	.5	1.9	1.8	.5	.5				46	46		
86/ 85							.5	1.5	1.3	1.9	3.4	1.4	.8	.3	.3			89	89		
84/ 83							.4	2.4	1.5	1.4	.9	.4	.3	.1				58	58		
82/ 81						.5	1.1	2.9	2.3	1.5	1.0	.1	.6	.3	.1			83	83		
80/ 79						1.4	2.8	3.3	1.1	.6	.3	.4	.1					80	81		
78/ 77					.6	1.5	5.0	4.3	.9	.6	.1							104	104		
76/ 75				.1	.8	2.4	2.5	.9	.4		.1							57	57	3	
74/ 73				.3	1.0	2.6	3.0	.5	.1									60	60	15	
72/ 71				.5	1.6	1.0	.4											28	28	34	
70/ 69		.3	.3	.5	2.1	.3	.1											28	28	99	1
68/ 67		.3	.8	.4	1.0	.4												22	22	154	11
66/ 65			.4	.1	.4		.1											8	8	199	29
64/ 63	.1	.3		.5	.5													11	11	144	62
62/ 61		.4		.3														5	5	84	76
60/ 59		.3	.3															4	4	36	114
58/ 57		.1																1	1	19	114
56/ 55		.1																1	1	13	116
54/ 53																					83
52/ 51																					47
50/ 49																					50
48/ 47																					21
46/ 45																					25
44/ 43																					9
42/ 41																					11
40/ 39																					8
38/ 37																					4
36/ 35																					8
34/ 33																					8

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 706-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) MAY (MONTH)

PAGE 2 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
32/ 31																					1
30/ 29																					1
26/ 25																					1
TOTAL	.1	1.6	1.6	2.6	8.0	10.0	15.9	15.9	8.3	7.1	8.8	6.4	4.6	3.9	2.4	1.3	1.6	800	801	800	800

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1874077	36521	45.7	16.090	800							
Dry Bulb	5217620	64360	80.3	7.604	801			89.3	80.3	48.4	4.9	93
Wet Bulb	3432610	52522	65.4	3.341	800			35.5	2.1			93
Dew Point	2511304	44104	55.0	6.449	800		.3	1.4				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1976/705-010

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAY MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
102/101																.1		1	1		
100/ 99															.1		.1	2	2		
98/ 97													.1			.1	.3	4	4		
96/ 95											.3	.3		.1	.1	.1		7	7		
94/ 93											.1	.1	.6	.1	.1	.8		15	16		
92/ 91										.3	.4	.5	.9	.3	.1			19	19		
90/ 89							.1	.1		.5	.5	1.0	1.0	.4	.3			31	31		
88/ 87								.1	.5	.4	.5	.9	.8	.3				27	27		
86/ 85						.1	.3	.3	.8	1.9	1.9	1.2	.1	.1				52	52		
84/ 83							.6	1.2	2.1	2.1	1.0	.6	.3	.1				62	62		
82/ 81						.1	.4	2.6	3.0	1.7	1.0	.3						70	70		
80/ 79						.5	1.8	3.0	1.8	.9	.3	.1						65	65		
78/ 77					.4	2.1	5.7	5.3	3.2	.6								135	135	2	
76/ 75					1.8	3.4	3.1	1.6	.6		.1							82	82	1	
74/ 73				.4	1.6	2.3	2.3	.9	.5									62	62	6	2
72/ 71			.3	.3	1.7	2.3	1.0											43	43	29	
70/ 69			.4	1.2	1.6	1.0	.1											34	34	54	1
68/ 67		.1	.8	.6	.9	.4	.1											23	23	149	3
66/ 65		.1	.8	.6	.3	.1	.1											16	16	175	14
64/ 63			.5		.2													6	6	171	50
62/ 61		.6	.2		.1													9	10	117	73
60/ 59		.1	.4															4	4	47	135
58/ 57		.1																1	1	14	111
56/ 55			.1															1	1	5	129
54/ 53			.1															1	2		71
52/ 51																				2	64
50/ 49																					48
48/ 47																					27
46/ 45																					15
44/ 43																					6
42/ 41																					6
40/ 39																					6
38/ 37																					4
36/ 35																					3

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Ref. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AWS 94 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 726-210

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAY MONTH

 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
34/ 33																					1
32/ 31																					3
TOTAL		1.3	3.6	3.2	8.5	12.4	15.8	15.0	12.6	8.3	5.7	4.9	3.2	2.5	.9	.6	1.3	772	775	772	772

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1966430	37134	48.1	15.290	772							
Dry Bulb	4823839	60901	78.6	7.438	775			88.2	76.2	38.9	3.6	93
Wet Bulb	3233639	50045	64.8	3.891	772			29.0	1.1			93
Dew Point	2431798	43116	55.8	5.678	772		.4	.7	.2			93

USAFETAC FORM 0-26-5 (OL A) AS 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 / 726-010

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — MAY MONTH

PAGE 1 — 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 91																.1		1	1		
90/ 89												.1			.1			2	2		
88/ 87										.1	.3		.1					4	4		
86/ 85									.3	.4	.4	.1	.1	.1				11	11		
84/ 83						.1	.3	.3	.5	.5	.3	.1		.1				17	17		
82/ 81						.3	.5	.5	.6	1.0								26	26		
80/ 79			.1			.5	1.4	.9	1.0	.6	.4	.1						40	40		
78/ 77					.4	1.3	1.9	1.5	.9	.4								50	50		
76/ 75				.5	1.6	3.2	2.6	1.1	.9	.1								80	80	1	
74/ 73			.1	.5	2.5	3.2	1.6	1.4	.6	.1								80	80	1	1
72/ 71			.9	1.1	7.3	1.8	1.3	.1	.3									101	101	5	
70/ 69		.1	1.9	4.0	3.3	1.4	.6	.2	.1									93	94	27	
68/ 67		.4	3.7	6.6	2.9	.9	.1	.1	.1	.1								118	118	82	7
66/ 65	.1	.8	3.2	2.8	.9	.3	.1											64	64	127	22
64/ 63	.1	2.3	3.0	.6	.6	.3												55	56	217	72
62/ 61		1.8	1.0	.5														26	26	163	101
60/ 59	.3	.9	.6	.1														15	15	104	180
58/ 57	.1	.6																6	6	38	138
56/ 55		.3																2	2	18	87
54/ 53		.3																2	2	7	64
52/ 51																				3	43
50/ 49																					35
48/ 47																					15
46/ 45																					9
44/ 43																					9
42/ 41																					3
40/ 39																					3
36/ 35																					2
34/ 33																					2
TOTAL	.6	7.3	14.8	16.8	19.5	13.0	10.5	6.2	3.3	3.8	1.3	.5	.2	.2	.1	.1			793		793
																		793		793	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3428898	50804	63.7	16.240	793							
Dry Bulb	4864268	56647	71.3	4.180	793			73.0	30.4	8.8		93
Wet Bulb	3152883	49929	62.8	3.250	793			13.6	.2			93
Dew Point	2424868	45668	57.5	3.817	793			.9	.1			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1975/782-010

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | MAY MONTH

PAGE 1 | 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
100/ 99																	.1	1	1		
82/ 81										.1								1	1		
80/ 79									.3	.1								3	3		
78/ 77					.1	.1	.1		.3									5	5		
76/ 75					.5		.8	.5										14	14		
74/ 73				.3	.6	.5		.1	.3	.1								15	15		
72/ 71			1.5	.6	.6	.3	.9	.4										34	34		
70/ 69		.9	2.5	2.8	1.9	.3	.4	.5										73	73	2	
68/ 67		1.7	5.9	3.8	.4	.1		.1		.1								95	95	32	5
66/ 65	.1	4.7	7.4	1.5	.6	.3	.4											118	118	66	26
64/ 63	.1	8.1	6.6	2.7	.1	.5												143	143	141	68
62/ 61	.5	7.1	3.4	1.0	.1				.1									97	97	178	107
60/ 59	.6	7.9	4.1	.8	.4	.1												109	109	132	200
58/ 57	.3	4.2	1.0	.3														45	45	108	122
56/ 55		1.8	.6	.1														20	20	68	99
54/ 53	.1	1.0	.1															10	10	37	55
52/ 51		.4																3	3	19	46
50/ 49																				2	24
48/ 47																				1	11
46/ 45																					6
44/ 43																					8
42/ 41																					6
40/ 39																					1
34/ 33																					1
28/ 27																					1
TOTAL	1.8	37.8	33.2	13.9	5.5	2.2	2.5	1.7	.9	.5							.1	786	786	786	786

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.
Rel. Hum.	5178448	62948	80.1	13.819	786
Dry Bulb	3269029	50833	64.7	5.040	786
Wet Bulb	2878274	47472	60.4	3.762	786
Dew Point	2626480	43278	55.0	4.817	786

Mean No. of Hours with Temperature	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.							
Dry Bulb			28.5	4.6	.5	.1	93
Wet Bulb			4.0				93
Dew Point		.1	.6				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974/762-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUN (MONTH)

PAGE 1 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
92/ 91									.1									1	1		
86/ 85							.1				.1							2	2		
84/ 83								.1										1	1		
82/ 81											.1							1	1		
80/ 79									.1	.3								3	3		
78/ 77			.3	.1							.1	.1						5	5		
76/ 75			1.5	.1			.1			.8	.3							22	22	1	
74/ 73		1.5	4.0	1.7	.3	.1	.3	.1	.3	.3	.3							68	68	11	
72/ 71		4.1	7.2	.4	.4	.6	.1	.3	.1	.1								104	104	45	18
70/ 69	.3	8.1	5.8	1.7	.9	.1	.3											123	123	96	52
68/ 67	.1	9.4	8.0	3.2	.5	.3	.4		.1									171	171	133	134
66/ 65	.1	6.8	4.4	.6	.6		.4											101	101	124	115
64/ 63	.5	5.8	2.3	.5	.4	.4	.3	.3										81	83	110	114
62/ 61	.3	4.0	.8		.3	.1	.1											43	43	115	94
60/ 59		3.0	.6	.3	.1													31	31	57	87
58/ 57	.3	.9	.4															12	12	49	56
56/ 55																				21	32
54/ 53																				11	13
52/ 51																				5	15
50/ 49																				1	13
48/ 47																					5
46/ 45																					5
44/ 43																					7
42/ 41																					9
40/ 39																					2
38/ 37																					5
36/ 35																					2
34/ 33																					1
TOTAL	1.5	43.5	35.2	8.6	3.5	1.7	2.1	.8	.8	1.4	.9	.1						779	781	779	779

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3462955	44292	82.8	14.172	779							
Dry Bulb	3622488	52077	68.6	4.497	781			58.9	11.9	.8		90
Wet Bulb	3246988	50164	64.4	4.492	779			33.0	1.4			90
Dew Point	3026858	48292	62.6	6.328	779			23.8				90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

PAGE 1 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
84/ 83											.1								1	1		
80/ 79										.1									1	1		
78/ 77									.1										1	1		
76/ 75			.5					.1		.1									6	6		
74/ 73		.5	1.0							.3									14	14		
72/ 71		2.7	3.4	.6	.4	.3	.4		.3	.3									64	65	13	3
70/ 69	.3	4.9	4.4	.8	.3	.1	.1	.1	.1	.4									89	89	52	26
68/ 67	1.3	9.6	8.5	1.2	.1	.4	.4	.4											169	170	99	74
66/ 65	1.3	10.9	4.3	.8	.1	.1	.3												137	140	154	102
64/ 63	.6	10.0	3.6	.9	.4	.1	.1	.4											125	125	134	154
62/ 61	1.0	7.6	1.0	.9	.1														83	83	127	114
60/ 59	.6	4.9	.3	.5	.4	.4	.1												56	56	77	132
58/ 57	.5	2.2	.4																24	24	53	52
56/ 55		.3	.1																3	3	36	37
54/ 53																					14	16
52/ 51																					9	13
50/ 49																					4	18
48/ 47																					1	1
46/ 45																						5
44/ 43																						5
42/ 41																						7
40/ 39																						6
38/ 37																						2
36/ 35																						4
34/ 33																						2
TOTAL	5.7	53.6	27.6	5.7	1.8	1.4	1.4	1.0	.5	1.2	.1								773	778	773	773

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3770668	66108	85.5	13.358	773							
Dry Bulb	3881127	67116	86.8	8.983	778			40.1	8.7	.1		90
Wet Bulb	3681099	63699	82.4	4.248	773			19.1				90
Dew Point	3721[illegible]	47134	61.0	6.218	773			12.0				90

USAFETAC FORM 0-26-5 (OL A) 3/8 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 752-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUN (MONTH)

 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
92/ 91												.3							2	2		
90/ 89								.1			.1	.1	.1	.1					5	5		
88/ 87											.1	.1		.1	.1				4	4		
86/ 85									.1			.3	.3	.1	.1				7	7		
84/ 83						.1	.5	.8		.3	.4		.3	.1					19	19		
82/ 81					1.1	2.4	.8	.8	.3	.3	.3	.1	.1						48	48		
80/ 79			.1	1.6	2.9	2.6	.4	.3	.3	.1	.1	.1							68	68		
78/ 77			1.0	4.9	4.7	1.5	.1	.1	.5		.4	.3							107	107		
76/ 75			2.4	5.4	5.5	1.3	.6	.3	.5		.4								130	130	2	
74/ 73	.1	.4	3.5	4.9	2.0	.5	.3	.3	.1	.3	.3								100	100	37	3
72/ 71		.6	6.5	1.3	2.1	.3	.3	.1	.3										91	92	124	18
70/ 69		4.3	5.3	1.4	.8		.3			.1									96	96	197	75
68/ 67	.1	3.7	3.0	1.1	.5	.3	.1	.3	.1										73	73	164	196
66/ 65	.1	1.8	.5		.4				.1										23	23	107	142
64/ 63		1.5	.3	.1	.1														16	16	71	135
62/ 61	.1	.3		.1	.1														5	5	39	65
60/ 59																					20	46
58/ 57																					20	21
56/ 55																					6	14
54/ 53																					5	13
52/ 51																					2	10
50/ 49																						16
48/ 47																						5
46/ 45																						6
44/ 43																						4
42/ 41																						6
40/ 39																						5
38/ 37																						5
36/ 35																						8
32/ 31																						1
TOTAL	.5	12.5	22.7	20.9	20.3	8.9	3.3	2.9	2.3	1.0	2.0	1.3	.8	.5	.2				794	795	794	794

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4224272	56414	71.1	16.805	794							
Dry Bulb	4286079	58911	74.1	5.101	795			83.0	53.2	10.5		90
Wet Bulb	3612072	52468	67.3	4.089	794			59.4	4.4			90
Dew Point	3208108	50171	63.2	6.918	794		.1	33.1	.3			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																			TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
102/101																	.4	3	3		
100/ 99																.1	.1	2	2		
98/ 97															.1		.1	2	2		
96/ 95													.1	.1	.2	.1	.1	6	6		
94/ 93											.2		.4	.1	.4	.2	.1	12	12		
92/ 91										.1	.4	.9	.2	1.5		.1	.2	28	28		
90/ 89								.2	.5	1.0	1.9	.7	1.0	.2	.5	.5		53	53		
88/ 87							.6	2.0	1.7	2.0	.6	.7	.2	.4	.6			72	73		
86/ 85						.4	5.4	4.2	2.2	1.2	.9	.7	.1	.2	.4	.1		128	128		
84/ 83						.9	4.2	4.1	2.0	.2	.2	.4	.6					102	102		
82/ 81					.1	2.6	6.1	5.4	1.2	.6	.2	.1	.1					133	133		
80/ 79					3.1	4.7	2.2	.6	.6	.1		.2	.1					95	95		
78/ 77				.2	3.6	2.9	2.7	1.2	.5	.1	.2							93	93	2	
76/ 75					2.0	2.1	.7	.4	.1	.2	.1	.1						47	47	12	
74/ 73				.1	1.1	.2	.2	.1			.1							16	16	114	
72/ 71				.4	.2													5	5	148	4
70/ 69			.1	.1		.1												3	3	214	26
68/ 67			.1	.1														2	2	120	112
66/ 65		.1																1	1	100	104
64/ 63																				41	146
62/ 61																				22	110
60/ 59																				17	101
58/ 57																				10	31
56/ 55																				3	35
54/ 53																					22
52/ 51																					20
50/ 49																					23
48/ 47																					12
46/ 45																					7
44/ 43																					8
42/ 41																					10
40/ 39																					6
38/ 37																					7
36/ 35																					12

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE - 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — JUN MONTH

PAGE 2 — 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
34/ 33																					4
32/ 31																					2
28/ 27																					1
TOTAL	.1	.2	1.0	10.2	13.9	22.3	18.3	9.0	5.7	5.0	4.0	3.0	2.6	2.2	1.2	1.1	803	804	803	803

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2066694	39196	48.8	13.931	804							
Dry Bulb	5593758	66693	83.0	5.171	804			89.9	88.8	67.2	2.8	90
Wet Bulb	3819012	59252	68.8	3.752	803			68.4	14.3			90
Dew Point	2970918	48445	60.2	7.758	803		.2	15.9				90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE AWS 64

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

PAGE 1 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
106/105																	.3	2	2		
104/103																	.5	4	4		
102/101													.1				.1	2	2		
100/ 99																.1	.5	5	5		
98/ 97												.1	.3	1.1	.3	.5	.3	20	20		
96/ 95												.4	.8	1.8	1.6	.5	.4	43	43		
94/ 93										.4	.8	.6	1.4	1.5	.6	.5	1.3	56	56		
92/ 91								.3	1.4	2.9	2.0	1.0	1.4	.4	.4	.4	.4	83	83		
90/ 89								2.2	4.6	4.2	2.8	.6	.5	.1	.5			122	122		
88/ 87							1.1	3.3	4.2	.9	.9	.6	.5	.3	.1			94	94		
86/ 85						.1	2.8	6.0	4.3	3.0	.5	.1	.3	.1				136	136		
84/ 83						.3	2.9	3.7	2.0	.9	.3	.3	.1					82	82		
82/ 81						.8	.8	3.0	.9	.1		.1						45	45		
80/ 79					.3	.5	1.9	1.1	.5	.1	.1	.8						42	42		
78/ 77					.1	1.0	2.0	.6	.5			.1						35	35	9	
76/ 75				.1	.4	.1	.1	.1	.3									9	9	53	
74/ 73																				158	
72/ 71			.4			.1												4	4	167	8
70/ 69		.1																1	1	138	26
68/ 67			.1															1	1	131	99
66/ 65		.1																1	1	63	108
64/ 63																				29	114
62/ 61		.1																1	1	25	98
60/ 59																				9	84
58/ 57																				5	54
56/ 55																				1	41
54/ 53																					31
52/ 51																					23
50/ 49																					24
48/ 47																					12
46/ 45																					8
44/ 43																					9
42/ 41																					16
40/ 39																					0


Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AK 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


U.S. GOVERNMENT PRINTING OFFICE—1974 762-610

AD-A082 415 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
INCIRLIK AB, ADANA, TURKEY. REVISED UNIFORM SUMMARY OF SURFACE --ETC(U)
MAR 77

UNCLASSIFIED USAFETAC/DS-80/023 NL

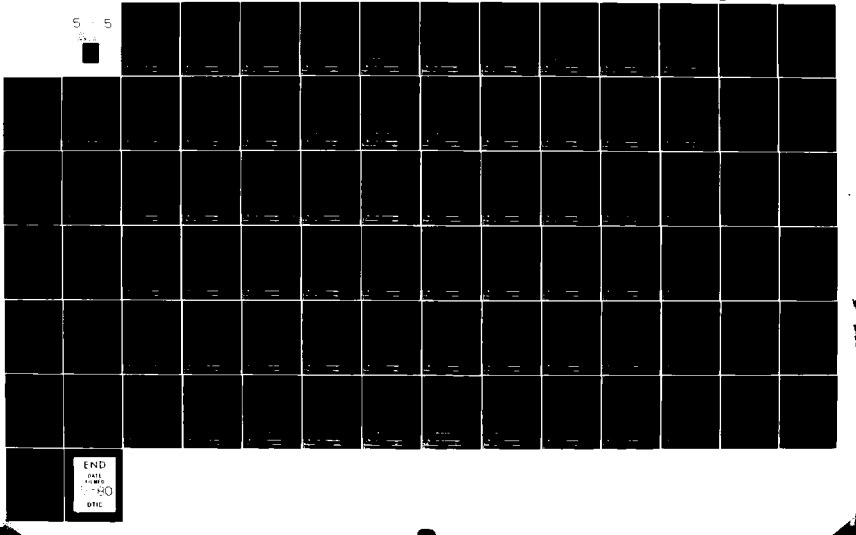

END
DATE FILMED
DTIC

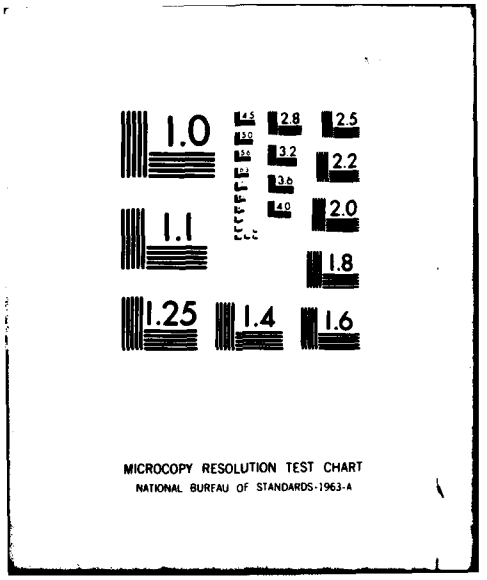
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
38/ 37																					8
36/ 35																					4
34/ 33																					7
32/ 31																					5
30/ 29																					1
TOTAL		.4	.5	.1	.8	2.9	11.7	20.3	18.7	12.6	7.4	4.8	5.3	5.3	3.6	2.0	3.7	788	788	788	788

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≥ 0 F	≥ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1499008	887787	41.4	12.090	788							
Dry Bulb	6024160	69812	87.8	4.458	788			89.8	89.1	81.2	18.1	90
Wet Bulb	2866870	58672	69.9	3.504	788			75.9	85.1			90
Dew Point	2858037	47035	59.7	3.068	788		.7	18.4				90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-510

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUN (MONTH)

PAGE 1 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
108/107																	.3	2	2		
104/103																	.4	3	3		
102/101																	.3	2	2		
100/ 99																	.4	3	3		
98/ 97														.3	.1	.1	.1	5	5		
96/ 95												.3	.4	.6	1.0	.3	.6	25	25		
94/ 93											.3	.4	1.1	1.7	.5	.6	.4	39	39		
92/ 91									.4	1.1	1.4	1.7	1.4	.4		.3		52	52		
90/ 89								1.1	1.3	2.7	4.3	1.1	.8	.4	.3			94	93		
88/ 87							.9	1.3	3.2	2.6	1.7	1.3	.3		.4			92	93		
86/ 85						.4	3.1	4.3	2.4	1.9	1.0	.8		.1				110	110		
84/ 83					.1	.8	3.7	4.7	2.6	1.1	.4	.1						106	106		
82/ 81					.3	1.9	4.3	4.7	.9	.4		.3						100	100		
80/ 79						2.0	1.0	3.1	.8	.1	.1	.4						59	59		
78/ 77				.1	.4	1.4	2.3	.8	.6	.1								45	45		
76/ 75					.6	.9	.4		.1	.1								17	17	27	
74/ 73			.1	.4	.1	.4	.4	.1										12	12	102	
72/ 71		.1	.1				.1											3	3	160	6
70/ 69			.5	.3		.1												7	7	193	26
68/ 67		.4	.4	.1														7	7	146	70
66/ 65																			1	85	87
64/ 63			.1															1	1	40	122
62/ 61																				18	102
60/ 59																				10	122
58/ 57																				3	66
56/ 55																					44
54/ 53																					37
52/ 51																					29
50/ 49																					22
48/ 47																					10
46/ 45																					2
44/ 43																					8
42/ 41																					11
40/ 39																					8

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE - 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUN (MONTH)

PAGE 2 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
38/ 37																						8
36/ 35																						1
34/ 33																						2
32/ 31																						1
TOTAL		.5	1.3	.9	1.5	7.9	16.2	20.2	12.2	10.2	9.2	6.5	4.0	3.4	2.3	1.3	2.4		784	787	784	784

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	[illegible]	[illegible]	44.6	19.671	784							
Dry Bulb	[illegible]	[illegible]	88.8	8.289	787			89.8	87.8	77.8	9.0	90
Wet Bulb	[illegible]	[illegible]	69.3	3.416	784			78.1	14.8			90
Dew Point	[illegible]	[illegible]	52.6	6.217	784		.1	11.7				90

USAFETAC FORM AWS 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

PAGE 1 | 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
102/101													.1					1	1		
100/ 99																	.1	1	1		
98/ 97															.1			1	1		
96/ 95																.1		1	1		
94/ 93															.1			1	1		
92/ 91												.1	.1	.1	.1			4	4		
90/ 89											.4	.3	.1					6	6		
88/ 87								.3	.1	.4	.9	.8		.4				22	22		
86/ 85					.1	.5	1.4	1.4	.8	1.5	.9	.8	.2					60	60		
84/ 83						.9	1.1	1.5	1.0	1.5	.6	.1	.4					57	57		
82/ 81					.3	2.9	1.0	3.0	1.9	.5	.1	.3						79	79		
80/ 79				1.6	4.2	4.3	2.4	1.6	.9	.3	.1		.1					123	123		
78/ 77		.1	.6	4.3	7.2	4.8	1.6	1.1	.5	.9		.1						169	170	2	
76/ 75			.6	3.4	5.3	1.5	1.3	.1	.5		.1							102	102	5	
74/ 73			.5	3.3	3.4	1.0	.6	.1	.1		.1							74	74	53	2
72/ 71			.6	1.5	2.7	.3	.1	.3										43	43	126	12
70/ 69			.1	.9	1.0	.1			.1									18	18	175	47
68/ 67		.8	.6	1.0		.1												20	21	186	123
66/ 65		.4	.1															4	4	111	107
64/ 63		.3	.1	.1														4	4	70	129
62/ 61																				33	98
60/ 59																				16	82
58/ 57																				4	52
56/ 55																				1	45
54/ 53																				2	33
52/ 51																					11
50/ 49																					17
48/ 47																					7
46/ 45																					7
44/ 43																					6
42/ 41																					4
40/ 39																					5
38/ 37																					1
36/ 33																					1

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 90 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 74-4 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE : 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33309 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

PAGE 2 | 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
32/ 31																					1
TOTAL		1.5	3.6	16.2	24.2	16.5	9.7	9.5	5.9	5.1	3.3	2.4	1.1	.5	.4	.1	.1		792		790
																		790		790	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2928665	40805	51.5	18.162	790							
Dry Bulb	4868896	61305	78.5	9.105	792			89.1	79.0	31.9	.0	90
Wet Bulb	3662665	53065	67.9	9.311	790			62.8	0.0			90
Dew Point	3037665	46734	61.3	9.277	790		.1	21.8	.2			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUN MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
82/ 81												.1	.1					2	2		
80/ 79					.3		.1	.3		.3								7	7		
78/ 77		.1	1.9	2.5	.8	.5	.9	.5	.1	.5	.1	.1						64	65		
76/ 75		.9	6.6	4.3	2.4	.9	1.3	.5	.1	.1								135	135	1	
74/ 73		.6	7.6	5.9	1.8	1.3	.9	.5	.4									149	149	31	2
72/ 71		1.4	10.4	2.7	1.9	.6	.8	.3										142	142	90	39
70/ 69	.1	3.3	6.1	2.9	1.3	.3	.1											111	111	143	80
68/ 67	.1	2.2	3.1	3.2	.8	.8	.4		.3									84	84	163	141
66/ 65		1.9	2.3	.6	.3	.1		.1										42	42	107	111
64/ 63	.1	1.9	1.0	.4		.1												28	28	109	114
62/ 61		.6	.3	.1		.1												9	9	72	77
60/ 59		.5	.6	.1														10	11	33	81
58/ 57			.1															1	1	23	44
56/ 55		.1																1	1	6	32
54/ 53																				4	15
52/ 51																				3	10
50/ 49																					14
48/ 47																					8
46/ 45																					4
44/ 43																					5
42/ 41																					2
40/ 39																					4
38/ 37																					2
TOTAL	.4	13.6	40.1	22.8	9.4	4.7	4.5	2.2	.9	.9	.1	.3	.1					785	787	785	785

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	[illegible]	[illegible]	74.1	13.4	785							
Dry Bulb	[illegible]	[illegible]	71.6	4.0	787			79.5	40.9	.5		90
Wet Bulb	[illegible]	[illegible]	68.3	4.1	785			49.1	3.7			90
Dew Point	[illegible]	[illegible]	63.2	6.1	785			30.0	.2			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PAGE 1 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
88/ 87													.1	.1				2	2		
86/ 85												.1	.3					5	5		
84/ 83												.1	.1					2	2		
82/ 81			.4	.3						.1	.1							7	7		
80/ 79		.5	2.1	2.3	.4	.1		.1	.1	.1		.3						47	47		
78/ 77		3.9	9.9	5.3	.1		.3	.1		.1	.1	.4						156	156	7	
76/ 75		3.6	15.6	4.8	.9	.1		.1	.5			.1						199	199	63	20
74/ 73	.3	2.9	11.6	3.4	1.7	.3		.1	.1									156	156	153	77
72/ 71		3.6	5.5	1.8	.9		.1	.3			.1							95	95	204	144
70/ 69		2.3	3.1	1.2	.3	.1	.3											58	58	139	185
68/ 67	.3	.8	2.3	.7	.1					.1								33	34	78	141
66/ 65	.1	.4	.1	.1														6	6	31	62
64/ 63		.1	.1															2	2	37	55
62/ 61																				15	19
60/ 59																				9	19
58/ 57																				6	5
56/ 55																				4	5
54/ 53																				1	1
52/ 51																				1	4
50/ 49																					4
48/ 47																					8
46/ 45																					5
44/ 43																					4
42/ 41																					2
40/ 39																					2
38/ 37																					3
34/ 33																					2
32/ 31																					1
TOTAL	.7	18.2	50.6	19.9	4.7	.7	.7	.6	.6	.5	.4	1.0	.8	.1				768	769	768	768

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5119888	61909	80.6	12.969	768							
Dry Bulb	4272478	57871	74.8	3.878	769			92.0	69.4	8.2		93
Wet Bulb	3790778	53073	70.1	3.963	768			78.0	37.0			93
Dew Point	3268758	51881	67.7	4.609	768		.1	68.7	11.7			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUL MONTH

PAGE 1 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 83												.7						5	5		
82/ 81					.1						.4							4	4		
80/ 79		.1	.4		.3						.5							10	10		
78/ 77		1.6	2.8	.7				.1	.3	.4								44	44	1	
76/ 75	.1	1.7	11.1	1.5	.1	.1	.1	.1	.4		.1	.1	.1					118	118	21	9
74/ 73	.1	4.3	13.3	3.7	.1		.3	.2	.3			.1						168	168	51	29
72/ 71	.1	9.2	10.2	.4	.3	.1		.3	.1		.1							158	158	150	74
70/ 69	.3	9.8	4.6	1.3	.5		.1	.4										127	127	206	160
68/ 67	.9	4.1	3.5	.8	.3	.1		.1										74	74	158	199
66/ 65		1.5	.7	.3	.3	.1												21	21	48	116
64/ 63		1.3	.4	.1														14	14	41	51
62/ 61		.1		.1	.1													3	3	34	24
60/ 59																				18	25
58/ 57		.1																1	1	10	4
56/ 55																				6	5
54/ 53																				4	6
52/ 51																				1	5
50/ 49																					10
48/ 47																					4
46/ 45																					13
44/ 43																					6
42/ 41																					2
38/ 37																					1
32/ 31																					1
30/ 29																					2
26/ 25																					1
TOTAL	1.6	34.0	46.9	9.0	2.1	.5	.5	1.6	1.1	.4	1.2	.9	.1					747	747	747	747

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3393457	98815	83.0	13.943	747							
Dry Bulb	3585188	108811	72.8	3.445	747			88.1	43.4	1.9		93
Wet Bulb	3503148	103072	68.8	4.088	747			73.1	9.1			93
Dew Point	3297098	97093	65.1	6.327	747		.3	38.6	4.7			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PAGE 1 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
96/ 95																	.1	1	1		
94/ 93																.1		1	1		
92/ 91															.4			3	3		
90/ 89													.4	.3	.1			6	6		
88/ 87													.3					4	4		
86/ 85					.7	1.2	.8		.5	.3	.4	.3	.7		.1	.1		36	36		
84/ 83				1.2	2.2	1.1	1.1		.5		.1		.3					49	49		
82/ 81				4.2	8.9	3.7	.8	.5	.4	.1	.5	.3		.1				149	149		
80/ 79		.1	1.3	6.0	4.7	1.3		.1	.1	.1	.4							109	109		
78/ 77		2.2	8.1	10.5	3.0	.3	.1	.1	.3	.1								189	189	21	1
76/ 75		1.1	7.4	3.2	.3		.3		.1	.1								94	94	125	17
74/ 73		1.3	5.0	2.4	.1	.1	.1	.3										71	71	220	80
72/ 71		.9	2.6	.4	.3	.1	.1											34	34	193	176
70/ 69		.8	.5	.1														11	11	97	202
68/ 67		.3		.1														3	3	37	140
66/ 65			.1															1	1	18	44
64/ 63																				21	18
62/ 61																				16	12
60/ 59																				11	7
58/ 57																				1	7
56/ 55																				1	7
54/ 53																					3
52/ 51																					9
50/ 49																					4
48/ 47																					9
46/ 45																					11
44/ 43																					4
42/ 41																					5
40/ 39																					1
38/ 37																					1
36/ 35																					1
34/ 33																					1
32/ 31																					1

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUL MONTH

PAGE 2 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL		6.7	25.1	28.1	20.2	7.8	3.0	1.1	2.0	.8	1.4	.5	1.8	.4	.7	.3	.1	761	761	761	761

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4126474	546812	72.0	15.384	761							
Dry Bulb	4703904	597134	78.4	3.888	761			92.9	87.0	35.0	.2	93
Wet Bulb	3918469	543525	71.4	3.891	761			84.7	44.7			93
Dew Point	3841193	533277	70.1	4.859	761		.2	75.3	12.0			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33808 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PAGE 1 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL	
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb/Dew Point
104/103																	.1	1	1	
102/101																	.1	1	1	
100/ 99																	.4	3	3	
98/ 97															.1	.3	.8	9	10	
96/ 95										.1			.1	.1	.8	.1		10	10	
94/ 93								.3		.4	.7	.8	.4	.8	.8	.4		34	34	
92/ 91								.4	1.7	.9	.1	.9	.7	.8	.5			46	46	
90/ 89						.3	.3	5.0	3.2	1.3	1.3	.5	.1	.4	.1			95	97	
88/ 87						.4	7.2	5.8	3.5	.5	1.1	.3	.3	.5				149	149	
86/ 85					.1	5.7	13.3	6.7	1.2	.5	.4		.3	.1				215	215	
84/ 83					.8	6.2	4.6	1.1	.4			.1	.3					102	103	
82/ 81				.3	.9	4.9	2.5	.4		.1								69	70	
80/ 79				.4	.8	.8	.1											16	16	6
78/ 77					.4	.5	.1											3	8	37
76/ 75					.1	.1												2	2	187 4
74/ 73																				271 17
72/ 71																				119 97
70/ 69		.1																1	1	60 163
68/ 67																				34 178
66/ 65																				26 106
64/ 63																				14 51
62/ 61																				7 20
60/ 59																				33
58/ 57																				9
56/ 55																				13
54/ 53																				9
52/ 51																				12
50/ 49																				6
48/ 47																				9
46/ 45																				9
44/ 43																				10
42/ 41																				11
40/ 39																				1
38/ 37																				2

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AN 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUL MONTH

PAGE 2 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
36/ 35																					1
TOTAL		.1		.7	3.2	18.8	28.1	19.0	10.0	3.9	3.5	2.6	2.1	2.8	2.4	.8	1.4	761	766	761	761

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2102170	38824	51.0	12.643	761							
Dry Bulb	3779010	66470	86.8	3.800	766			93.0	92.9	91.5	7.2	93
Wet Bulb	4038495	55383	72.8	3.226	761			87.3	61.2	.2		93
Dew Point	3296487	49797	69.4	7.060	761			56.1	2.6			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE - 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL	
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
104/103															.1		.6		6	6	
102/101																.3	1.2		11	11	
100/ 99										.1	.3	.4	.3	.1	.1	.5	.6		19	19	
98/ 97										.3	.6	.4	1.3	1.4	.6	.3	.4		41	41	
96/ 95									.6	1.4	1.2	1.0	1.5	.8	.6	.3	.3		60	60	
94/ 93								.3	2.2	3.2	2.4	.6	1.5	.8	.3	.3			90	90	
92/ 91								4.6	5.3	5.4	1.2	1.0	.5	.4	.3	.3			147	147	
90/ 89							.8	11.7	6.5	2.2	.9	.1	.1	.1		.1			176	177	
88/ 87							6.3	6.4	3.0	.5	.4								134	134	
86/ 85						.6	4.2	3.5	1.4	.4	.1								80	80	
84/ 83						.4	.5	.1											8	8	
82/ 81							.1												1	1	1
80/ 79				.1			.1												2	2	19
78/ 77					.1														1	1	118
76/ 75																					236 1
74/ 73																					212 15
72/ 71		.1	.1	.1															3	3	91 111
70/ 69																					46 162
68/ 67																					36 178
66/ 65																					11 85
64/ 63																					7 66
62/ 61																					1 31
60/ 59																					1 26
58/ 57																					22
56/ 55																					14
54/ 53																					9
52/ 51																					14
50/ 49																					13
48/ 47																					4
46/ 45																					6
44/ 43																					13
42/ 41																					4
40/ 39																					1
38/ 37																					2

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE—1974 762-610

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUL MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
34/ 33																					2
TOTAL		.1	.1	.3	.1	1.0	12.1	26.6	19.6	13.5	7.1	3.6	5.3	3.6	2.1	1.9	3.1	779	780	779	779

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1052320	34774	44.6	11.339	779							
Dry Bulb	6455504	70890	90.9	4.037	780			93.0	92.0	92.4	27.1	93
Wet Bulb	4268288	57971	73.9	3.107	779			90.6	70.0	.7		93
Dew Point	3367268	36029	46.4	6.737	779			55.8	1.9			93

USAFETAC FORM AWS 94 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE—1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
106/105																.1		1	1		
104/103																	.5	4	4		
102/101																.1	.5	5	5		
100/ 99																.3	.1	3	3		
98/ 97													.4	.1	.4	.1	.3	10	10		
96/ 95								.1		.3	.3	1.3	1.3	1.2			.3	28	28		
94/ 93								.3	.3	2.3	1.7	1.4	1.4	.4	.1	.3		63	63		
92/ 91						.1		1.5	4.4	4.5	2.1	1.3	.5	.3				114	113		
90/ 89						.1	1.2	7.2	3.9	2.2	1.9	.9	.4					138	138		
88/ 87						1.5	7.5	5.8	2.9	1.4	.4	.1						160	161		
86/ 85						4.0	7.3	5.4	1.7	.5	.1	.1						149	149		
84/ 83					.4	1.9	3.3	1.2	.4	.4								59	60		
82/ 81					.3	.5	1.0	.9	.3	.1								24	25	2	
80/ 79					.1	.1	.3											4	4	11	
78/ 77				.1	.1	.3	.1											5	5	68	1
76/ 75																				207	3
74/ 73					.1													1	1	224	34
72/ 71																				140	87
70/ 69																				82	145
68/ 67																				31	133
66/ 65																				11	108
64/ 63																				1	81
62/ 61																				1	48
60/ 59																					24
58/ 57																					33
56/ 55																					15
54/ 53																					10
52/ 51																					8
50/ 49																					4
48/ 47																					2
46/ 45																					0
44/ 43																					1
42/ 41																					2
40/ 39																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AK 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUL MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
34/ 33																					1
TOTAL				.1	1.0	8.6	20.7	22.4	14.7	11.7	6.4	5.1	4.2	1.9	.5	.9	1.7	778	782	778	778

Element (X)	$\Sigma_n X'$	$\Sigma_n X$	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 92 F	Total
Rel. Hum.	1856138	37032	47.6	10.981	778							
Dry Bulb	6174974	99420	88.8	3.984	782			93.0	93.0	92.2	14.7	93
Wet Bulb	4191160	57000	73.3	2.841	778			91.4	61.2	.3		93
Dew Point	3269421	21601	63.6	3.759	778			48.2	4.3			93

USAFETAC FORM 0-26-3 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) JUL (MONTH)

PAGE 1 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
102/101																	.1	1	1		
98/ 97																.1		1	1		
96/ 95														.1		.1		2	2		
94/ 93													.3		.3			4	4		
92/ 91										.4	.1	.3	.3	.1	.1			10	10		
90/ 89						.1		.4	.3	.5	1.2	.5						23	23		
88/ 87						.3	.8	1.2	.6	.8	1.0	.1						37	37		
86/ 85				.1	.9	5.8	2.9	2.3	1.7	1.5	.6							124	124		
84/ 83				.6	2.0	6.4	3.6	2.0	.9	.8								128	129		
82/ 81			.6	6.3	5.5	5.9	1.5	2.4	1.2		.1							185	185		
80/ 79			.8	8.2	7.7	3.2	.6	.5	.3			.1						167	169	2	
78/ 77			.5	3.8	4.2	1.3	.6											82	82	35	
76/ 75			.3	.1	.5	.1	.1											9	9	131	15
74/ 73			.1	.3	.1													4	4	240	53
72/ 71		.1	.3															3	3	177	136
70/ 69			.1															1	1	104	164
68/ 67																				65	147
66/ 65																				24	69
64/ 63																				1	59
62/ 61																				1	39
60/ 59																					37
58/ 57																				1	30
56/ 55																					16
54/ 53																					6
52/ 51																					1
50/ 49																					2
48/ 47																					3
46/ 45																					2
36/ 35																					1
TOTAL		.1	2.7	19.5	21.0	23.0	10.2	9.0	4.9	4.0	3.1	1.0	.5	.2	.4	.2	.1	781	784	781	781

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.
Rel. Hum.	3119188	488848	61.8	13.081	781
Dry Bulb	3207888	64481	82.2	3.748	784
Wet Bulb	4081387	56413	72.8	2.892	781
Dew Point	3840881	59417	47.1	5.317	781

Element (X)	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.			93.0	92.5	69.6	.9	93
Dry Bulb			89.8	48.6	.1		93
Wet Bulb			61.2	8.1			93
Dew Point							

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE AS 64

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | JUL MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
94/ 93															.1			1	1		
92/ 91														.1	.1			2	2		
90/ 89														.3				2	2		
88/ 87													.3	.3				4	4		
86/ 85										.1		.3	.1					4	4		
84/ 83						.1		.1										2	2		
82/ 81			.9	1.3	.6	.4			.1									26	26		
80/ 79		1.7	4.9	8.6	2.2	.4	1.0	.4										149	149		
78/ 77		3.9	16.0	16.8	2.3	.8	.8	.3	.3		.1	.1		.1				321	323	21	2
76/ 75	.1	1.3	8.8	6.8	2.1	1.4	.8											163	163	122	49
74/ 73		.5	4.0	1.5	1.0	.9	.1											63	64	218	103
72/ 71		.6	.4	1.2	.6	.1												23	23	187	195
70/ 69		.4	.4	.1		.1												8	8	100	175
68/ 67		.3	.5															6	7	58	95
66/ 65		.1																1	1	39	35
64/ 63																				21	38
62/ 61																				6	26
60/ 59																				1	29
58/ 57																					6
56/ 55																				1	3
54/ 53																				1	3
52/ 51																					1
50/ 49																					4
48/ 47																					2
46/ 45																					2
44/ 43																					2
42/ 41																					1
38/ 35																					1
26/ 25																					1
TOTAL	.1	8.0	38.9	36.4	8.9	4.3	2.9	.8	.4	.1	.1	.4	.4	.8	.2			779			779
																		775		775	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4702880	59670	77.0	11.519	775							
Dry Bulb	4622598	59068	77.0	2.088	779			92.9	88.3	11.3	.1	93
Wet Bulb	3989978	55548	71.7	3.350	775			84.7	43.3			93
Dew Point	3621931	53367	68.8	5.599	775		.1	74.3	10.5			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 782-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) AUG (MONTH)

PAGE 1 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85					.1													1	1		
82/ 81			.4	.1							.1	.1						6	6		
80/ 79		.8	3.6	2.4	.1		.1				.3	.3						80	60		
78/ 77		5.0	12.3	4.0	.6	.1	.3	.1										179	179	11	
76/ 75		5.0	14.7	5.5	.9			.1	.1	.1	.3							213	213	102	26
74/ 73		2.6	7.0	6.4	1.8	.1		.3		.1								146	146	177	123
72/ 71		1.5	7.3	2.0	2.3	.5		.1										109	109	155	169
70/ 69	.1	1.0	1.9	.6	.8	.6	.1	.4										44	44	139	111
68/ 67	.1	.8	1.5	.3	.5	.1	.5		.1									31	31	92	149
66/ 65		.3	.1	.3	.3		.1											8	8	47	80
64/ 63																				27	39
62/ 61																				15	34
60/ 59																				10	10
58/ 57																				7	5
56/ 55																				6	8
54/ 53																				1	8
52/ 51																					3
50/ 49																					4
48/ 47																					3
46/ 45																					7
44/ 43																					3
42/ 41																					2
40/ 39																					4
38/ 37																					1
TOTAL	.3	10.9	48.8	21.6	7.3	1.5	1.1	1.0	.3	.3	.6	.4						797		797	797

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.					797							
Dry Bulb					797			93.1	70.6	1.8		93
Wet Bulb					797			78.9	38.8			93
Dew Point					797			67.4	11.4			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE—1974 782-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | AUG MONTH

 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
92/ 91								.1										1	1		
86/ 85																			1		
82/ 81				.1							.1							2	2		
80/ 79		.1	.5						.3		.3							9	9		
78/ 77		1.0	4.1	.9			.1		.1		.4							53	53	2	
76/ 75		2.1	12.7	1.3	.4		.1			.1	.1							134	134	18	5
74/ 73	.4	5.4	11.8	2.4	.6				.1									165	165	78	36
72/ 71	.3	8.5	13.4	2.8	.3	.1		.5	.4	.1								210	211	173	123
70/ 69	.3	6.0	5.8	1.0	.1	.1	.1	.6	.3	.4								117	117	201	162
68/ 67	.5	1.8	4.9	1.3	.8	.3		.4		.1								79	79	134	173
66/ 65	.1	1.4	.6	.4	.3													22	22	85	93
64/ 63		.4	.1	.1														5	5	46	78
62/ 61																				19	47
60/ 59																				13	24
58/ 57																				12	5
56/ 55																				9	8
54/ 53																				5	7
52/ 51																				4	2
50/ 49																					4
48/ 47																					3
46/ 45																					5
44/ 43																					4
42/ 41																					10
40/ 39																					2
38/ 37																					2
34/ 33																					3
32/ 31																					1
TOTAL	1.5	26.7	94.0	10.2	2.4	.5	.4	1.6	1.1	.8	.9							797	799	797	797

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.					797							
Dry Bulb					799			89.9	42.5	.6		93
Wet Bulb					797			78.7	11.4			93
Dew Point					797		.1	38.8	4.8			93

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

32308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) AUG (MONTH)

 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 91													.1					1	1		
90/ 89							.1					.1		.2	.1	.1		6	6		
88/ 87									.1	.1		.1	.1					4	4		
86/ 85					.1	.7	.1					.4	.1	.1				13	13		
84/ 83				1.7	4.6	3.2	.2	.4	.1	.2	.1	.2	.2	.1				91	91		
82/ 81			.7	9.1	5.6	3.1	.5	.2			.4	.1	.1					160	161		
80/ 79		.2	1.4	6.2	2.1	.7			.1	.1	.1	.4						92	92	2	
78/ 77		1.1	8.6	6.3	1.7	.2		.2	.1	.2	.2	.1						153	153	28	2
76/ 75	.1	1.4	7.9	1.9	1.1	.1	.2	.1		.1	.1	.1						107	107	200	24
74/ 73		1.0	5.0	1.7	.5			.2	.1	.1								70	70	190	140
72/ 71		1.9	4.0	.6	.4		.2	.2	.1	.1								61	61	149	196
70/ 69		1.5	1.1	.5	.2	.1												28	28	98	150
68/ 67	.5	1.1	.5	.1	.1		.1											20	20	52	132
66/ 65																				26	52
64/ 63																				19	28
62/ 61																				13	15
60/ 59																				14	4
58/ 57																				11	4
56/ 55																				3	7
54/ 53																				1	5
52/ 51																					4
50/ 49																					7
48/ 47																					7
46/ 45																					6
44/ 43																					6
42/ 41																					7
40/ 39																					3
38/ 37																					1
36/ 35																					4
34/ 33																					1
32/ 31																					1
TOTAL	.6	8.2	29.2	28.2	16.3	8.2	1.4	1.0	.7	1.1	1.0	1.4	.7	.3	.1	.1		806	807	806	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4281738	89862	73.9	14.762	806							
Dry Bulb	4913261	68888	77.9	4.312	807			93.0	60.4	37.6		93
Wet Bulb	4150286	67738	71.4	4.248	806			83.0	48.3			93
Dew Point	3780068	64088	68.2	7.141	806		.1	74.3	19.2			93

USAFETAC FORM 26-3 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE - 1974 782-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | AUG MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
98/ 97															.1	.1	.6	7	7		
96/ 95											.1	.1		.2	.2	.2	.4	11	11		
94/ 93							.1		.1	.1	.4	.1	.2	.2	.1	.4	.5	19	19		
92/ 91								1.0	2.0	2.1	.7	.2	.2	.2	.2	.1	.1	57	57		
90/ 89						.1	.7	8.1	3.1	1.5	.5	.4	.4	.6	.1	.1		126	127		
88/ 87					.1	1.1	8.7	7.3	2.4	.6	.2	.1	.5	.4	.1			174	174		
86/ 85					.7	7.8	12.3	4.1	1.1	.7	.2	.1	.2	.4	.1			225	225		
84/ 83	.1			.4	1.1	6.0	3.7	1.2	.2	.2	.1	.1	.2					109	109	1	1
82/ 81				.6	.9	2.6	1.9	.4	.2		.1							54	54	1	
80/ 79				.5	.7	.7	.2	.1										19	19	8	
78/ 77				.1	.1		.2											4	4	60	2
76/ 75				.1														1	1	255	12
74/ 73																				267	34
72/ 71																				88	132
70/ 69																				49	206
68/ 67																				20	161
66/ 65																				17	78
64/ 63																				19	55
62/ 61																				13	27
60/ 59																				8	17
58/ 57																					8
56/ 55																					8
54/ 53																					7
52/ 51																					2
50/ 49																					8
48/ 47																					6
46/ 45																					8
44/ 43																					6
42/ 41																					11
40/ 39																					3
38/ 37																					3
36/ 35																					5
32/ 31																					4
30/ 29																					1

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE: 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | AUG MONTH

PAGE 2 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
28/ 27																						1
TOTAL	.1			1.7	3.7	18.4	27.9	22.2	9.2	5.3	2.5	1.2	1.9	2.1	1.1	1.0	1.6		806	807	806	806

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≥ 0 F	≥ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2916448	41998	52.1	12.814	806							
Dry Bulb	6074178	76000	84.8	3.882	807			22.0	22.0	12.3	4.3	22
Wet Bulb	4336888	59884	73.2	3.419	806			20.4	20.3	.3		22
Dew Point	3876864	53524	66.2	7.811	806		.7	13.3	3.7	.1		22

USAFETAC FORM 0-26-5 (OL A) 20-64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE - 1974 752-510

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 67-76 YEARS — AUG MONTH

PAGE 1 — 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL	
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb / Dew Point
102/101														.1	.2	.2	.7	11	11	
100/ 99															.4	.5	.9	14	15	
98/ 97											.6	.5	.4	.5	.4		.5	23	23	
96/ 95									.0	2.0	2.1	2.2	1.5	1.1	.4		.5	84	84	
94/ 93								.9	3.8	5.7	3.1	1.7	.7	.1	.1	.5	.1	137	138	
92/ 91							.1	4.9	8.4	7.6	1.1	.6	.6	.6	.2	.2		200	200	
90/ 89							.9	10.5	6.5	4.3	.7		.6	.5	.5			200	200	
88/ 87						.5	3.5	4.5	1.8	1.0	.5	.1	.1					99	100	
86/ 85						1.2	.7	1.5	1.0	.1								37	37	
84/ 83						.2	.2	.2		.1								7	7	
82/ 81								.1										1	1	
80/ 79						.1		.1										2	2	20 /
78/ 77						.1												1	1	159 /
76/ 75									.1									1	1	274 / 1
74/ 73																				170 / 29
72/ 71			.1															1	1	89 / 107
70/ 69																				42 / 167
68/ 67																				21 / 196
66/ 65																				21 / 86
64/ 63																				13 / 63
62/ 61																				6 / 44
60/ 59																				3 / 23
58/ 57																				/ 14
56/ 55																				/ 21
54/ 53																				/ 11
52/ 51																				/ 6
50/ 49																				/ 6
48/ 47																				/ 10
46/ 45																				/ 8
44/ 43																				/ 7
42/ 41																				/ 4
40/ 39																				/ 4
38/ 37																				/ 1
36/ 35																				/ 2

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AUG 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974/762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | AUG MONTH

 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
32/ 31																					3
30/ 29																					1
28/ 27																					1
24/ 23																					1
22/ 21																					2
TOTAL			.1			2.2	5.5	22.7	22.2	20.8	8.1	5.1	3.9	2.9	2.2	1.5	2.7	818	821	818	818

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1004184	38866	47.5	10.029	818							
Dry Bulb	4884864	74078	91.8	3.401	821			93.0	92.9	92.8	30.7	93
Wet Bulb	4491744	69858	74.6	3.446	818			88.1	70.8	.8		93
Dew Point	3838823	59442	68.5	7.072	818		.9	36.8	3.4			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE — 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | AUG MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
100/ 99											.1		.1					1	1		
98/ 97											.1		.1	.2			.2	6	6		
96/ 95									.1	.4	.4	.6	1.2	.4	.9	.2		34	34		
94/ 93								.4	1.1	2.4	1.7	1.6	.9	.6				70	70		
92/ 91								3.9	3.6	4.4	1.2	2.2	.2		.1			126	126		
90/ 89						.1	.1	11.2	6.0	2.6	1.4	.7	.6	.1	.1			185	186		
88/ 87			.2			1.4	7.6	8.1	2.0	1.4	.7	.6	.1	.1				179	180		
86/ 85					.4	4.1	6.0	2.7	1.5	1.0	.2	.4	.2					133	133	2	
84/ 83					.2	1.0	2.0	1.4	.9	.4								47	47		2
82/ 81			.1	.1	.1	.4	.6	.4										14	14		
80/ 79				.1		.4			.1									5	5	7	
78/ 77				.1	.2													3	3	96	
76/ 75																				250	6
74/ 73																				209	34
72/ 71		.1																1	1	109	112
70/ 69																				79	146
68/ 67																				29	172
66/ 65																				16	98
64/ 63																				7	59
62/ 61																					44
60/ 59																					60
58/ 57																					16
56/ 55																					16
54/ 53																					11
52/ 51																					7
50/ 49																					10
48/ 47																					2
46/ 45																					4
44/ 43																					2
42/ 41																					2
38/ 37																					1
TOTAL		.1	.4	.4	1.0	7.3	16.3	28.0	15.3	12.4	5.8	6.2	3.6	1.3	1.1	.2	.2		806		804
																		804		804	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1947670	38668	48.1	10.466	804							
Dry Bulb	6366508	71384	88.8	3.316	806			93.0	92.9	92.2	12.8	93
Wet Bulb	4363599	59181	73.6	3.034	804			90.3	69.2	.3		93
Dew Point	3534796	53108	66.1	5.773	804			54.6	4.9	.2		93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1978 762-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (YEARS) AUG (MONTH)

PAGE 1 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
94/ 93												.1							1	1		
92/ 91								.1		.1					.1				3	3		
90/ 89										.2	.6								7	7		
88/ 87						.4	1.4	.6	1.2	1.0	.6	.4							45	45		
86/ 85					1.1	7.8	4.5	1.6	.6	.7	.6	.1							138	139		
84/ 83			.1	1.4	2.5	4.1	3.7	2.6	.6	.4		.2							126	126		
82/ 81			1.0	9.9	8.1	6.1	2.0	2.4	.5	.1	.1								243	244		
80/ 79		.1	1.9	6.5	5.8	4.0	.9	1.0	.4										165	166	4	
78/ 77		.1	.7	2.5	1.5	1.6	.4	.1	.1	.1									58	58	40	3
76/ 75			.1	.6	.5			.1											11	11	212	18
74/ 73		.1	.1	.1		.1													4	4	228	99
72/ 71			.1	.1															2	2	140	176
70/ 69			.1																1	1	100	139
68/ 67		.1			.1														2	2	49	133
66/ 65																					23	64
64/ 63																					4	62
62/ 61																					5	39
60/ 59																					1	27
58/ 57																						16
56/ 55																						11
54/ 53																						11
52/ 51																						1
50/ 49																						2
48/ 47																						4
46/ 45																						1
TOTAL		.5	4.2	21.1	19.6	24.1	12.8	8.6	3.3	2.7	2.0	.9			.1					809		806
																			806		806	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3386628	31171	63.8	12.040	806							
Dry Bulb	3431892	66389	82.0	2.231	809			93.0	92.4	78.0	.1	93
Wet Bulb	4264159	58572	72.7	3.070	806			89.2	55.8			93
Dew Point	3743761	54773	68.0	5.144	806			69.5	13.8			93

USAFETAC FORM 0-26-5 (OL A) 84 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 67-76 YEARS | AUG MONTH

PAGE 1 | 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
84/ 83				.1			.1												2	2		
82/ 81			1.1	2.1	.2	.5	.1												33	33		
80/ 79		1.1	8.3	9.1	2.0	.4	.2				.1								172	172		
78/ 77		4.6	17.7	13.1	4.2	2.6	1.0	.1	.2		.1								353	353	22	
76/ 75		2.0	4.4	6.1	3.2	.4	.5												134	134	186	53
74/ 73		.4	1.6	2.8	1.4	.2	1.1	.1	.1										63	63	205	193
72/ 71		.2	1.2	.7	.5	.9		.1											30	30	149	153
70/ 69	.4		.4	.1	.1	.4	.4												14	15	102	124
68/ 67	.1	.2	.2		.1	.1													7	7	72	95
66/ 65		.1																	1	1	30	59
64/ 63																					19	39
62/ 61																					13	41
60/ 59																					8	11
58/ 57																					3	6
56/ 55																						20
54/ 53																						3
52/ 51																						3
50/ 49																						4
48/ 47																						3
44/ 43																						1
42/ 41																						1
TOTAL	.5	8.7	35.0	34.2	11.7	5.4	3.5	.4	.4		.2								809	810		809
																			809		809	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4909438	62474	77.2	10.254	809							
Dry Bulb	4790382	62256	76.9	8.991	810			92.9	86.9	10.2		93
Wet Bulb	4172126	56026	71.7	5.696	809			84.6	47.5			93
Dew Point	3879203	55039	69.0	5.364	809			71.0	28.5			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974-762-870

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — SEP MONTH

PAGE 1 — 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
80/ 79			.2	.2						.1	.2								7	7		
78/ 77		.3	.7	.9	.1				.2	.6	.1	.1							27	27		
76/ 75		.5	2.1	2.6	1.1	.2	.1	.1	.3	.5		.1							67	68	7	1
74/ 73		.5	3.3	3.9	1.4	.1		.1	.6	.2	.1	.1							91	91	15	8
72/ 71		3.2	7.6	2.7	1.7	.6	.5	.1	.2	.2									147	147	57	17
70/ 69		4.8	5.5	3.3	1.3	.2	1.0	.8	.1										149	150	117	46
68/ 67	.2	3.5	10.4	3.9	1.1	.7	.8	.6	.2	.1									189	190	124	148
66/ 65		2.4	5.5	1.9	.5	.2	.3	.1	.1										97	97	131	95
64/ 63	.1	1.5	2.4	1.5	.5		.3	.3											58	58	141	126
62/ 61	.3	.6	.8	.6	.7	.6	.1												32	32	110	114
60/ 59	.1	.2	.3	.1	.2														9	9	59	94
58/ 57				.1															1	1	48	57
56/ 55																					32	29
54/ 53																					15	19
52/ 51																					14	8
50/ 49																					4	29
48/ 47																						18
46/ 45																						10
44/ 43																						23
42/ 41																						6
40/ 39																						5
38/ 37																						3
36/ 35																						4
34/ 33																						1
32/ 31																						3
30/ 29																						2
TOTAL	.8	17.5	38.8	21.9	8.6	2.6	3.2	2.2	1.8	1.8	.5	.3							874	877	874	874

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3228431	66258	75.8	15.367	874							
Dry Bulb	4247982	69934	79.8	4.038	877			69.8	19.8			90
Wet Bulb	3841208	36248	66.4	4.941	874			33.0	2.3			90
Dew Point	3191808	53211	60.9	7.732	874		.3	22.7	.9			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 782-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
82/ 81												.1						1	1		
78/ 77										.2	.1							3	3		
76/ 75		.3	.6	.3	.3		.1	.2	.6	.5	.1							27	27		
74/ 73		.3	2.7	1.7	.2		.1	.2	1.1	.5								61	61	3	3
72/ 71		3.2	4.1	2.4	.8	.2	.2	.7	.7	.1	.1	.1						111	112	21	2
70/ 69	.1	6.3	4.2	2.3	.3	.3	.7	.5	.3	.1	.1							134	134	75	36
68/ 67	.8	7.4	11.6	2.2	.7	.9	.7	.8	.3									222	224	138	98
66/ 65	.1	5.6	6.1	1.1	.6	.3	.7	.3	.1									131	133	140	118
64/ 63		3.8	4.9	1.6	.3	.9	.6	.1	.1									108	108	141	130
62/ 61		1.5	1.3	1.0	.2	.3	.3	.1										42	42	103	102
60/ 59		.8	.5	.7	.8	.1	.3											28	28	86	116
58/ 57			.1	.1	.3													5	5	67	95
56/ 55																				38	32
54/ 53																				31	21
52/ 51																				18	21
50/ 49																				8	16
48/ 47																				4	28
46/ 45																					23
44/ 43																					28
42/ 41																					17
40/ 39																					9
38/ 37																					7
36/ 35																					6
34/ 33																					2
30/ 29																					1
28/ 27																					1
26/ 25																					1
TOTAL	1.0	29.3	39.1	13.5	4.7	3.2	3.8	3.0	3.3	1.4	.5	.2						873	878	873	873

Element (X)	Σ_x'	Σ_x	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	342069	67167	76.9	17.814	873							
Dry Bulb	403861	79457	91.7	8.739	878			37.6	9.4	.1		90
Wet Bulb	349691	74051	82.8	4.954	873			24.4	.3			90
Dew Point	314498	71908	59.8	8.198	873		.3	14.3	.3			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — SEP MONTH

PAGE 1 — 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
88/ 87							.1							.2	.1			4	4		
86/ 85						.1	.1			.1	.1	.2	.2	.2				10	10		
84/ 83				.2		.9		.1	.1		.2	.2	.4			.1		20	20		
82/ 81			.1	2.2	1.1	1.3	.5	.2	.1	.5	.9	.8	.2					65	66		
80/ 79			.2	2.5	3.6	1.6	1.1	.7	.7		.9	.1						98	99		
78/ 77			1.2	2.9	2.1	1.3	.5	.1	.5	1.1	.8	.7	.2					97	97	4	
76/ 75			1.6	2.9	2.6	1.1	1.1	.1	.4	.2	.2							87	87	26	4
74/ 73		.4	3.0	2.7	1.5	.2	.1	.4	.9	.6	.1							85	85	47	10
72/ 71	.1	1.8	4.2	1.9	1.8	.1	.2	.8	.2	.4								98	98	99	42
70/ 69		2.3	2.7	3.0	1.1	.2	.2	.8	.4	.1								90	90	124	72
68/ 67	.2	4.8	4.0	1.5	1.2	.2	.2	.7	.1	.1								112	112	130	147
66/ 65	.1	1.5	2.1	.5	.2	.1	.4	.1										43	43	96	110
64/ 63		.8	1.2	.4	.2	.5	.4											29	29	109	84
62/ 61		.4	.1	.2		.2												8	8	68	79
60/ 59		.2	.1	.2	.2		.2											9	9	56	76
58/ 57					.1													1	1	41	30
56/ 55																				28	23
54/ 53																				16	16
52/ 51																				8	18
50/ 49																				2	16
48/ 47																				2	26
46/ 45																					29
44/ 43																					20
42/ 41																					23
40/ 39																					10
38/ 37																					9
36/ 35																					5
34/ 33																					2
32/ 29																					2
28/ 27																					1
24/ 23																					1
TOTAL	.5	12.1	20.6	21.1	15.7	7.9	5.0	3.7	3.4	3.0	3.4	1.8	1.1	.8	.1	.1			858		858
																		856		856	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4274816	58188	68.0	19.343	856							
Dry Bulb	4441602	60916	73.2	8.692	858			80.6	49.1	12.0		90
Wet Bulb	3729941	54287	65.8	8.584	856			45.2	8.1			90
Dew Point	3831868	51998	60.7	9.857	856		.4	28.5	1.8			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE - 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — SEP MONTH

PAGE 1 — 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
100/ 99																	.3	3	3		
98/ 97													.1				.8	8	8		
96/ 95												.1			.1	.6	.6	12	12		
94/ 93								.1		.1	.2	.1	.1	.1	.1	.7	.6	19	19		
92/ 91								.5	.1	.6	.2	.6	.7	.6	.8	.3	.1	39	40		
90/ 89						.1	.2	.8	.5	1.1	1.0	.2	.3	1.8	.7	.5	.1	65	65		
88/ 87						.1	.9	1.7	2.9	1.6	.7	1.0	1.1	1.4	.6	.2		108	109		
86/ 85					.2	.9	6.2	4.4	3.1	1.9	.7	.9	1.7	1.2	.2	.1		191	191		
84/ 83	.1				.3	2.6	4.8	3.4	1.4	1.1	.5	1.5	.6	.3				146	146	1	1
82/ 81					.3	4.1	3.9	3.1	.1	.2	.3	.6	.3					114	114	1	
80/ 79				.2	1.7	2.7	1.8	1.9	.3	.3	.5		.1					85	85	2	
78/ 77				.5	1.5	2.0	1.6	.8	.3		.1	.6						65	65	13	1
76/ 75				.1	.3	.8	.3	.1		.1								16	16	39	2
74/ 73				.1	.1		.2											4	4	170	9
72/ 71			.1						.1									2	2	139	24
70/ 69			.1	.1														2	2	140	60
68/ 67			.1					.1										2	2	91	128
66/ 65																				86	112
64/ 63																				81	104
62/ 61	.1																	1	1	54	81
60/ 59																				29	78
58/ 57																				9	33
56/ 55																				6	24
54/ 53																				1	15
52/ 51																					14
50/ 49																					18
48/ 47																					27
46/ 45																					28
44/ 43																					36
42/ 41																					27
40/ 39																					17
38/ 37																					18
36/ 35																					13
34/ 33																					2

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AUG 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
32/ 31																						4
30/ 29																						3
28/ 27																						4
TOTAL	.2		.3	1.0	4.5	13.4	20.0	16.9	8.8	7.1	4.2	5.6	5.1	5.4	2.5	2.4	2.5		884		882
																		882		882		

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	2052858	40197	48.8	10.016	882							
Dry Bulb	4330621	74693	84.8	4.038	884			89.9	89.8	78.8	4.8	90
Wet Bulb	4200827	68729	78.9	4.099	882			62.9	29.1	.2		90
Dew Point	3176878	52181	59.1	10.173	882		1.8	23.8	1.8	.1		90

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PAGE 1 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
104/103																	.6	5	5		
102/101															.1	.1	1.1	12	12		
100/ 99											.1		.5		.2	.1	2.1	26	26		
98/ 97										.1	.3	.1	.1	.7	.1	.3	1.0	25	25		
96/ 95								.1	.2	.2	.8	1.0	1.0	.5	1.1	.6	.9	57	57		
94/ 93									.1	.7	1.3	1.6	1.4	1.0	1.4	1.6	1.1	89	89		
92/ 91								.2	1.3	3.3	2.3	2.7	.7	1.4	1.9	.8	.3	131	132		
90/ 89								1.3	3.5	5.2	3.8	1.1	.9	1.8	1.1			165	165		
88/ 87							.3	3.3	4.1	1.9	2.6	1.0	.8	1.5	.1	.1		139	140		
86/ 85						.1	1.6	3.1	3.3	2.2	.5	.2	.2	.1	.1			100	100		
84/ 83							.7	1.6	1.3	1.0	.1		.3	.1				45	45		
82/ 81						.2	.9	1.8	.6	.3	.2	.1	.1					38	38	1	
80/ 79				.1		.2	1.0	.6	.1			.2						20	20	4	
78/ 77		.1	.1		.2	.3	.3	.1										11	11	16	
76/ 75			.3						.1									4	4	57	2
74/ 73				.1	.1					.1								3	3	156	4
72/ 71																				167	7
70/ 69		.1							.2									3	3	138	28
68/ 67			.2						.1									3	3	117	95
66/ 65																				97	91
64/ 63		.1																1	1	77	98
62/ 61																				29	108
60/ 59																				11	92
58/ 57																				4	56
56/ 55																					37
54/ 53																				2	29
52/ 51																				1	20
50/ 49																					31
48/ 47																					23
46/ 45																					24
44/ 43																					33
42/ 41																					34
40/ 39																					19
38/ 37																					13

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 74 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE - 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PAGE 2 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
36/ 35																					18
34/ 33																					5
32/ 31																					6
30/ 29																					4
TOTAL		.3	.7	.2	.3	.9	4.9	12.1	14.9	15.2	12.0	8.2	6.0	7.1	6.3	3.6	7.2	877	879	877	877

Element (X)	$\Sigma_n X'$	$\Sigma_n X$	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1265868	32202	36.7	13.963	877							
Dry Bulb	7033281	78487	89.3	8.348	879			89.9	69.3	36.2	21.9	90
Wet Bulb	4247384	60020	69.3	4.847	877			67.3	24.0	.3		90
Dew Point	2873716	50188	57.4	9.798	877		1.0	14.8	.0			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE : 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
104/103														.1			.2	3	3		
102/101																.1	.3	4	4		
100/ 99															.1		1.4	13	13		
98/ 97										.2				.2	.1	.2	.7	13	13		
96/ 95									.1	.2	.1	.3	.8	.1	.8	.6	.6	32	32		
94/ 93								.1	.1	.6	.5	.8		1.1	1.4	.9	.2	46	46		
92/ 91							.5	1.0	.7	1.5	.7	1.3	1.7	1.7	.5	.7	.1	75	75		
90/ 89							.1	1.5	1.5	2.9	1.5	1.3	.9	.9	.5	.1	.2	99	99		
88/ 87							1.6	4.1	4.0	2.2	1.6	1.3	.7	.7				141	141		
86/ 85	.1					.3	4.3	5.4	4.5	2.2	1.7	.6	.2	.1				174	174	1	1
84/ 83					.1	1.1	2.5	4.1	1.8	1.0		.2	.5					100	100		
82/ 81					.2	1.5	2.4	2.6	.9	.1	.5	.1	.1					74	75		
80/ 79					.7	.5	1.6	1.5	.3									40	40	4	
78/ 77					.5	.3	.9	.6	.3	.1								24	24	12	
76/ 75				.1	.2	.2	.2	.2										9	9	52	
74/ 73			.1	.2	.2	.2	.2											9	9	164	5
72/ 71				.5	.2		.1											7	7	163	18
70/ 69			.1		.1	.1												3	3	162	48
68/ 67			.1	.2	.1													4	4	122	110
66/ 65		.1																1	1	102	99
64/ 63							.1	.1										2	2	51	111
62/ 61								.1										1	1	28	109
60/ 59																				9	101
58/ 57																				1	35
56/ 55																					34
54/ 53																					37
52/ 51																				2	30
50/ 49																					27
48/ 47																				1	21
46/ 45																					22
44/ 43																					8
42/ 41																					17
40/ 39																					14
38/ 37																					10

Element (X)	Σx^2	Σx	$\bar{x}$	σ_n	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974-762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — SEP MONTH

PAGE 2 — 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
36/ 35																					6
34/ 33																					3
32/ 31																					4
30/ 29																					2
28/ 27																					2
TOTAL	.1	.1	.3	1.0	2.4	4.3	14.2	21.3	14.6	10.2	7.3	5.3	4.5	5.0	3.3	2.2	3.8	874	875	874	874

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_s	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1788671	87481	42.9	14.171	874							
Dry Bulb	8879746	79716	86.8	5.444	878			89.6	38.1	12.7	11.4	90
Wet Bulb	4268631	60888	69.4	4.672	874			70.0	24.0	.3		90
Dew Point	3168716	52068	59.6	8.747	874		.8	18.7	.0	.1		90

USAFETAC FORM 0-26-5 (OL A) 80 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 752-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — SEP MONTH

PAGE 1 — 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
92/ 91													.1						1	1		
90/ 89											.2			.1					3	3		
88/ 87							.1	.2	.3	.2	.1	.3	.3						15	15		
86/ 85					.2	.4	.8	1.0	.7	.6	.4	.4							41	41		
84/ 83				.3	.2	2.7	2.4	1.2	1.1	.8	.7	.4	.3	.1					92	92		
82/ 81			.1	1.0	1.5	5.5	1.3	1.3	1.1	.7	.2	.2							116	116		
80/ 79			.3	3.1	3.8	4.5	2.6	1.0	.7	.6	.1	.2							151	151	1	
78/ 77			.7	6.1	7.4	4.6	1.5	2.0	.4	.2	.3	.1							208	209	7	
76/ 75			.4	3.4	4.4	2.9	.7	.4		.3	.1								113	115	22	5
74/ 73			.3	1.3	2.9	.4	.8	.9	.2	.1	.1								64	64	101	12
72/ 71			.2	.7	1.9	.4	.2		.1										32	32	187	37
70/ 69		.1	.6	.6	.9	.6	.2		.1										27	27	170	92
68/ 67		.1	.6	.4	.4	.6													19	19	140	162
66/ 65		.2	.2		.1														5	5	106	124
64/ 63			.1																1	1	68	100
62/ 61								.1											1	1	45	102
60/ 59							.1												1	1	20	66
58/ 57																					16	36
56/ 55						.1													1	1	5	47
54/ 53																						25
52/ 51																						23
50/ 49																						21
48/ 47																					2	8
46/ 45																					1	6
44/ 43																						9
42/ 41																						6
40/ 39																						3
38/ 37																						1
36/ 35																						4
34/ 33																						2
TOTAL		.4	3.6	16.9	23.8	22.8	10.7	8.3	4.8	3.3	2.4	1.8	.8	.2					891	894		891

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2422887	33879	60.8	12.649	891							
Dry Bulb	3477897	69868	78.1	4.483	894			89.1	81.2	32.7		90
Wet Bulb	4181287	60915	68.4	4.342	891			63.4	13.2			90
Dew Point	3338818	53802	62.6	7.033	891			31.1	1.7			90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) SEP (MONTH)

PAGE 1 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
94/ 93															.1			1	1		
86/ 85													.1					1	1		
82/ 81				.2	.2						.3							7	7		
80/ 79		.1	.6	.7	.8	.1				.1	.6							26	26		
78/ 77		.6	2.5	5.1	1.8	.6	.1	.1	.7	.2		.5						107	107	1	1
76/ 75		.6	4.1	5.2	2.9	.9	.1	.5	.1	.2								128	128	19	3
74/ 73		.6	4.4	5.0	3.2	.9	1.1	.5	.6	.3								146	146	41	21
72/ 71		1.1	7.1	3.2	3.8	.8	.9	.1	.3	.1	.1							154	155	99	35
70/ 69	.1	1.0	4.4	2.7	1.8	.8	.1	.5	.1									102	103	127	84
68/ 67		.5	4.2	2.7	1.3	.8	.6	.7										94	94	134	114
66/ 65	.2	.9	2.5	1.0	1.0	.7	.1	.1										58	58	122	102
64/ 63	.1	.8	.6	.3	.6	.9		.1										30	30	100	124
62/ 61		.9	.1	.5		.3												16	16	102	86
60/ 59			.2	.2														4	4	49	104
58/ 57																				31	36
56/ 55																				32	25
54/ 53						.2												2	2	13	31
52/ 51					.1													1	1	3	15
50/ 49																				1	26
48/ 47																					19
46/ 45																				1	18
44/ 43																				2	10
42/ 41																					8
40/ 39																					3
38/ 37																					3
36/ 35																					1
34/ 33																					6
32/ 31																					2
TOTAL	.5	7.1	30.8	27.0	17.4	7.1	3.1	2.5	1.8	1.0	1.0	.5	.1		.1			877	879	877	877

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4729100	63142	72.0	14.484	877							
Dry Bulb	4884464	63180	71.8	4.472	879			78.6	42.6	1.9	.1	90
Wet Bulb	3808916	57618	68.7	5.176	877			48.2	6.8			90
Dew Point	3395977	54163	61.7	7.804	877		.2	26.8	2.6			90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE—1974 762-510

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | OCT MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
88/ 87											.1							1	1		
78/ 77										.2	.1							3	3		
76/ 75			.1					.1	.2	.3	.1							8	8		
74/ 73							.1	.7	.1			.1						9	9	1	
72/ 71		.1	.1	.1	.1	.2	.5		.3									13	13		1
70/ 69		.6	1.2	.7	.8	.2	.8	.3										41	41	2	1
68/ 67		1.7	5.8	1.2	1.0	1.0	.9	.5		.3								110	110	15	6
66/ 65	.1	2.4	3.3	2.7	1.6	1.5	.9	.7	.9	.1								125	125	34	22
64/ 63	.1	4.6	4.8	2.5	1.8	1.9	.7	.1	.3	.1								150	150	83	42
62/ 61	.1	4.2	4.1	2.6	1.1	1.8	1.1	.5			.1							138	138	97	65
60/ 59	.3	4.3	5.0	1.9	1.2	.6	.5	.2	.1									125	125	134	91
58/ 57	.1	2.2	1.9	.9	1.0	.7		.2	.1	.1								64	65	139	86
56/ 55		1.4	.3	1.4	.3	.3	.2											35	35	125	100
54/ 53		.5	1.3	.7	.1	.5	.3											31	31	69	77
52/ 51	.1	.2		.6	.2	.1	.1											12	12	64	73
50/ 49				.3	.3	.1	.3											10	10	56	62
48/ 47			.2	.3	.1													6	6	22	51
46/ 45			.1															1	1	12	45
44/ 43																				12	35
42/ 41																				12	34
40/ 39																				4	20
38/ 37																				1	10
36/ 35																					11
34/ 33																					11
32/ 31																					15
30/ 29																					6
28/ 27																					0
26/ 25																					3
24/ 23																					2
22/ 21																					3
20/ 19																					1
18/ 17																					1
16/ 15																					1
14/ 13																					1
12/ 11																					1

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE AIR 64

U. S. GOVERNMENT PRINTING OFFICE—1974-762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

PAGE 2 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
TOTAL	.9	22.1	28.5	16.0	9.9	9.0	6.5	3.3	2.2	1.2	.5	.1					882	883	882	882

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	4756603	62721	71.1	18.235	882							
Dry Bulb	3468986	58166	62.8	5.076	882			19.8	2.2	.1		93
Wet Bulb	2877986	50142	56.9	5.576	882			1.9	.1			93
Dew Point	2450758	45886	52.0	9.076	882		6.1	.8				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE — 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — OCT MONTH

PAGE 1 — 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
80/ 79											.1							1	1		
76/ 75								.1	.1			.1						3	3		
74/ 73							.1	.2	.3									6	6		
72/ 71			.2			.2	.7	.4	.4									18	18		
70/ 69			.3	.4	.3	.3	.2	.6	.1									21	21	1	
68/ 67	.2	.9	2.3	1.1	.4	.9	.6	.6		.3								66	66	6	3
66/ 65	.3	2.4	3.1	1.4	.6	.9	1.2	1.0	.3									102	102	25	12
64/ 63	.2	4.7	3.7	2.7	1.0	2.6	.4	.4	.3									144	140	54	31
62/ 61	.3	5.1	4.7	2.8	1.6	1.0	1.1	.3	.1									153	153	105	52
60/ 59	.8	7.4	6.7	3.0	1.0	2.1	1.1	.3	.2									204	204	129	111
58/ 57	.1	2.2	1.6	1.2	1.8	1.0	.1	.2	.3	.3								80	80	140	91
56/ 55	.1	1.2	.7	1.7	.3		.1	.1	.1									39	39	134	98
54/ 53	.1	.6	1.1	.3	.1	.1	.4		.1									26	26	90	83
52/ 51		.1	.4	.7	.4	.3	.1											19	19	68	77
50/ 49	.1		.1	.3	.4	.2												11	11	63	42
48/ 47				.1	.6	.1												7	7	32	42
46/ 45																				11	64
44/ 43																				16	35
42/ 41																				17	46
40/ 39																				8	25
38/ 37																				1	17
36/ 35																					12
34/ 33																					14
32/ 31																					10
30/ 29																					11
28/ 27																					8
26/ 25																					3
24/ 23																					4
22/ 21																					2
20/ 19																					2
18/ 15																					1
14/ 13																					2
10/ 9																					2

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

PAGE 2 0300-0500 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	2.3	24.7	24.9	15.8	8.6	9.8	6.2	4.3	2.6	.7	.1	.1						900	902	900	900

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4889772	64078	71.2	19.088	900							
Dry Bulb	3428369	58457	61.8	4.498	902			11.9	1.0			93
Wet Bulb	2847918	50280	56.0	3.886	900			.7				93
Dew Point	2421727	48911	51.0	2.618	900		4.8	.3				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

PAGE 1 0600-0800 (HOURS L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85									.1			.1						2	2		
82/ 81						.1				.1	.3		.2					7	7		
80/ 79						.1		.1	.2	.6	.1	.1	.1					12	12		
78/ 77				.2	.1	.2	.1	.1	.2	.4	.3	.3						19	19		
76/ 75				.9	.6	.7	.6	.4	.4	.8	.3							42	42		
74/ 73			.2	.8	.6	.8	.8	1.1	.9	.4	.3							53	53		
72/ 71			.4	.4	1.9	.2	.7	.9	1.0	.7	.2	.1						59	59	6	
70/ 69		.3	.6	1.0	1.9	.9	1.2	.6	.6	.2	.1							68	68	12	1
68/ 67	.2	1.2	2.1	3.2	2.3	1.3	1.3	.7	.3	.2	.1							118	118	33	16
66/ 65	.4	1.7	3.0	1.1	1.2	.6	1.0	.7	.7									93	94	48	24
64/ 63	.1	2.5	3.0	2.6	1.2	1.6	1.0	.3	.2	.1								113	113	90	37
62/ 61	.4	3.1	2.3	2.0	.7	1.0	.7	.2	.1	.1								96	96	113	61
60/ 59	.4	2.7	3.0	1.7	.7	1.1	.2	.2	.3	.1								94	95	127	109
58/ 57	.1	1.0	.8	.9	1.1	.4	.2		.2	.1								44	45	134	73
56/ 55		.3	.3	1.2	.3	.2	.3	.2	.2									29	29	99	73
54/ 53		.6	.8	.7	.3	.3												24	24	63	66
52/ 51		.1	.3		.2	.1	.1											8	8	63	61
50/ 49			.1	.2	.4	.3	.1											11	11	46	70
48/ 47				.1	.2	.1												4	4	17	41
46/ 45																				11	60
44/ 43																				15	38
42/ 41																				14	41
40/ 39																				3	24
38/ 37																				2	28
36/ 35																					13
34/ 33																					13
32/ 31																					14
30/ 29																					5
28/ 27																					6
26/ 25																					4
24/ 23																					2
22/ 21																					0
20/ 19																					2
18/ 17																					1

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33309 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — OCT MONTH

PAGE 2 — 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
16/ 15																					1
12/ 11																					1
10/ 9																					1
TOTAL	1.	8	13.	5	17.	1	17.	1	13.	8	10.	2	8.	4	5.	8	5.	6	3.	9	1.	9	.7	.3						896	899		896
																		896		896	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4010328	87128	48.6	20.292	896							
Dry Bulb	3870892	80689	43.3	4.634	899			39.2	14.0	1.1		93
Wet Bulb	3811889	81668	37.7	4.047	896			5.2				93
Dew Point	2436488	68871	31.2	9.012	896		6.7	1.8				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE AIR 64

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-810

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | OCT MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
94/ 93															.1	.1	.1		3	3		
92/ 91						.1						.1		.2	.1	.1			6	6		
90/ 89											.1	.2	.7	.6	.1	.1	.1		17	17		
88/ 87							.1				.2	.3	1.2	.6	.1	.1			24	24		
86/ 85							.3	.1	.3	.3	.7	1.2	1.6	.3	.6				49	49		
84/ 83						.1	1.4	1.9	.4	.4	1.9	1.8	1.9	.3					92	93		
82/ 81						.7	1.7	2.3	1.2	.9	.4	1.6	1.1	.1					90	90	1	
80/ 79					.2	1.1	1.7	2.0	1.9	1.9	1.2	.9	.1	.1	.1				101	101		
78/ 77				.2	1.4	2.3	3.9	2.5	1.9	1.6	1.2	.8	.1	.2					146	146		1
76/ 75				.3	1.6	2.1	1.4	2.0	.9	.7	.8	.3	.7	.1					98	98	1	
74/ 73			.3	.4	1.2	1.4	1.8	1.1	1.6	.8	.4		.1						83	83	4	
72/ 71		.1		.3	1.1	.4	1.0	.8	.6	.4	.3	.1	.2						49	49	33	
70/ 69			.4	.4	.4	.6	1.3	.7	.7	.1	.1	.1	.1						45	46	79	2
68/ 67		.1	.1	.9	.7	.2	.7	.3	.6	.4	.4	.2							42	42	89	17
66/ 65			1.0	.6	.4		.2	.1	.1	.2	.1								25	25	129	36
64/ 63		.4	.3	.1	.1				.2	.3	.2								16	16	141	64
62/ 61		.7	.2						.1										9	9	147	54
60/ 59		.2				.1			.2										5	5	99	105
58/ 57			.1																1	1	81	81
56/ 55																					26	59
54/ 53		.1																	1	1	27	50
52/ 51																					17	59
50/ 49																					8	53
48/ 47																					10	52
46/ 45																					8	45
44/ 43																					2	48
42/ 41																						52
40/ 39																						26
38/ 37																						18
36/ 35																						23
34/ 33																						8
32/ 31																						11
30/ 29																						5
28/ 27																						1

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AWS 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — OCT MONTH

PAGE 2 — 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
26/ 25																					4
24/ 23																					7
22/ 21																					8
20/ 19																					4
18/ 17																					5
16/ 15																					2
12/ 11																					2
TOTAL		1.7	2.5	3.3	7.2	9.2	15.5	13.9	10.6	8.1	8.2	7.6	7.8	2.5	1.1	.4	.2	902	904	902	902

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2016808	29638	41.9	17.473	902							
Dry Bulb	2619180	69732	77.2	4.418	904			87.1	73.0	35.2	.2	93
Wet Bulb	2048427	54368	62.5	2.897	902			21.2	.8	.1		93
Dew Point	2468178	66265	71.4	16.704	902		8.1	2.1	.1			93

USAFETAC FORM 0-26-5 (OL A) AS 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
100/ 99																	.1	1	1		
98/ 97																	.1	1	1		
96/ 95												.1	.1		.3	.3	.7	14	14		
94/ 93												.2	.1	.5	.7	1.3	.3	29	29		
92/ 91										.1	.3	.1	.2	1.0	.8	.4	.1	28	28		
90/ 89									.2	.4	.7	.7	.9	1.1	.9	.3		49	49		
88/ 87							.1	.3	.8	.4	.6	.9	1.9	1.6	1.1			72	73		
86/ 85							.2	1.0	2.6	3.0	1.4	3.1	3.1	.8	.3	.1		142	142		
84/ 83							.1	1.1	2.1	2.0	2.2	1.8	1.6	.3	.1	.1		104	104		
82/ 81				.1		.2	.5	2.7	2.1	2.0	1.5	.3	.9	.5	.3			103	103		
80/ 79						.9	1.0	2.2	2.5	2.1	1.1	1.2	.1	.4	.2			107	107		
78/ 77					.3	.5	1.1	.9	1.9	1.0	1.5	1.0	.3					78	78		
76/ 75					.3	.5	.9	1.2	.9	1.2	1.1		.2	.2				60	60	3	
74/ 73					.8	.4	.4	.8	.5	.4	.2		.3	.1				37	37	16	1
72/ 71				.1	.4	.4	1.0	.5	.1	.1	.4	.1	.1	.1				32	32	28	
70/ 69		.1	.2	.5	.1	.4	.3	.1	.1	.1	.1	.1						21	21	79	2
68/ 67			.5	.2	.4	.3	.1				.3	.2						20	20	114	7
66/ 65		.2	.3	.1														6	6	143	23
64/ 63			.1		.1													2	2	179	40
62/ 61	.1		.1															2	2	136	35
60/ 59		.2		.2														4	4	80	73
58/ 57																				72	73
56/ 55																				26	68
54/ 53																				12	57
52/ 51																				10	85
50/ 49																				3	75
48/ 47																				0	57
46/ 45																				1	57
44/ 43																					44
42/ 41																					55
40/ 39																					33
38/ 37																					22
36/ 35																					20
34/ 33																					16

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE: 1974 762-670

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

 1200-1400 (HOURS L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
32/ 31																					13
30/ 29																					7
28/ 27																					3
26/ 25																					3
24/ 23																					1
22/ 21																					5
20/ 19																					6
18/ 17																					6
14/ 13																					2
12/ 11																					1
10/ 9																					1
4/ 3																					1
TOTAL	.1	.5	1.3	1.3	2.5	3.8	5.8	10.9	13.8	12.8	11.7	9.8	9.9	6.8	4.7	2.9	1.3	912	913	912	912

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	14088487	328068	34.2[illegible]327		912							
Dry Bulb	4138021	76386	81.7	8.668	913			91.6	84.1	60.1	4.6	93
Wet Bulb	3402284	87873	63.5	4.778	912			24.5	1.9			93
Dew Point	2174655	68601	50.[illegible]188		912		5.0	1.0	.1			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974/762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | OCT MONTH

 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
96/ 95												.1		.2	.1		.3	7	7		
94/ 93													.3	.2	.2	.3	.1	11	11		
92/ 91											.3	.2	.1	1.0	.4	.6	.1	25	25		
90/ 89											.1	.4	.6	.3	.7	.4	.1	24	25		
88/ 87								.1	.2	.4	.8	.8	1.4	.8	.4	.1		46	47		
86/ 85							.7	.2	1.0	1.0	1.3	1.6	1.0	.9	.3	.1		73	73		
84/ 83							.2	1.1	1.3	2.3	2.0	1.7	.7	.2				86	86		
82/ 81						.3	1.3	2.1	1.6	1.7	1.6	.3	.6	.3	.2			90	90		
80/ 79						1.2	1.7	2.7	1.7	2.0	1.3	1.3	.1	.2	.1			111	111		
78/ 77					.8	2.0	3.0	2.5	2.5	.7	1.9	.8	.8	.1	.1			135	139		
76/ 75					.9	1.0	1.8	2.3	1.0	1.7	.4	.1						83	83		
74/ 73					.6	1.4	.8	1.6	.6	.3	.7	.1	.3	.1				58	58	10	
72/ 71				.1	1.1	.7	1.1	.4	.4	.2	.1	.2	.1					41	41	18	
70/ 69			.1	.9	1.0	1.0	1.0	.4	.1	.1	.1							43	43	82	1
68/ 67		.2	.4	.4	.4	.8	.2	.1	.1	.1	.2	.2						30	30	93	9
66/ 65			.3	.1	.2	.2		.1	.2									11	11	154	17
64/ 63		.1	.2	.1	.1			.1	.1	.1								8	8	161	44
62/ 61		.3		.1	.1													5	5	141	60
60/ 59	.3	.4	.1		.1													9	9	90	112
58/ 57																				76	80
56/ 55																				27	70
54/ 53																				21	66
52/ 51																				5	83
50/ 49	.1																	1	1	13	70
48/ 47																				3	37
46/ 45																				3	49
44/ 43																					31
42/ 41																					34
40/ 39																					24
38/ 37																					21
36/ 35																					15
34/ 33																					12
32/ 31																					11
30/ 29																					7

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33309 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

PAGE 2 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
28/ 27																					5
26/ 25																					3
24/ 23																					6
22/ 21																					2
20/ 19																					3
16/ 15																					2
14/ 13																					1
12/ 11																					1
8/ 7																					1
TOTAL	.4	1.1	1.2	1.8	5.4	8.7	11.8	13.8	10.8	10.7	10.9	7.9	6.0	4.5	2.7	1.6	.7		899		897
																		897		897	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	17779841	37065	41.2	24.870	897							
Dry Bulb	8468227	70989	79.0	6.185	899			89.8	77.7	44.7	1.9	93
Wet Bulb	3580921	40818	68.0	4.731	897			21.0	1.0			93
Dew Point	2468841	48098	51.9	9.718	897		4.4	1.0				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
86/ 85									.1			.2						3	3		
84/ 83									.1									1	1		
82/ 81				.1				.2	.3	.2	.2	.2						12	12		
80/ 79				.1	.3	.6	.6	.4	.1	.6	.3	.1	.1					29	29		
78/ 77				.2	1.3	1.1	.8	1.2	.6	.2		.1						50	51		
76/ 75			.1	1.6	2.7	2.0	1.8	.9	1.1	.4	.3							98	98	1	
74/ 73			.3	2.1	3.1	1.6	1.1	1.3	.2	.2	.1	.1	.1					93	93	2	
72/ 71			1.9	2.5	5.5	2.1	2.5	1.2	.7	.1	.1	.1						149	150	7	2
70/ 69		.1	1.1	2.0	2.2	2.0	.8	.3	1.0	.4								90	91	49	3
68/ 67		.2	2.0	3.5	2.2	2.3	1.7	1.3	.8	.2								128	128	82	31
66/ 65		.6	1.3	1.7	1.5	.9	1.2	.6	.4	.2		.1						76	77	104	40
64/ 63		1.6	1.0	2.0	.4	.8	.7	.4		.1	.1							64	64	143	68
62/ 61	.1	.6	1.1	1.1	.8	.1	.6	.2										41	41	131	83
60/ 59	.2	.4	.7	1.0	.2		.7		.1									30	30	111	118
58/ 57		.6	.2	.4	.1	.6		.1	.1									19	19	80	79
56/ 55			.4	.2														6	6	59	80
54/ 53				.1				.1										2	2	50	76
52/ 51		.1	.2															3	3	36	59
50/ 49					.1													1	1	19	64
48/ 47																				13	45
46/ 45				.1														1	1	1	26
44/ 43																				4	29
42/ 41																				4	15
40/ 39																					15
38/ 37																					22
36/ 35																					11
34/ 33																					9
32/ 31																					8
30/ 29																					2
28/ 27																					2
26/ 25																					3
22/ 21																					1
20/ 19																					1
18/ 17																					2

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE - 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) OCT (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
14/ 13																					1
12/ 11																					1
TOTAL	.3	4.1	10.3	18.7	20.5	14.1	12.3	8.5	5.7	2.8	1.2	1.0	.2					896	900	896	896

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3497269	54031	60.3	16.243	896							
Dry Bulb	4296894	62688	69.7	3.793	900			47.8	29.7	1.8		93
Wet Bulb	3248787	54847	60.9	5.894	896			14.6	.8			93
Dew Point	2708084	48898	54.2	8.973	896		2.2	3.7				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE — 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — OCT MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
100/ 99													.1					1	1		
80/ 79										.1		.1						2	2		
78/ 77									.1	.1	.2	.2						6	6		
76/ 75				.1	.1			.1	.1	.3	.1							8	8	1	
74/ 73			.3	.7	.2		.6	.3	.1									20	20		
72/ 71		.1	1.6	.7	.8	.3	.6	.2	.1	.1								40	40		
70/ 69		.1	2.0	2.0	.9	.8	1.1	.2		.3	.1							68	68	10	
68/ 67		.9	3.2	3.5	1.6	1.2	1.5	.2	.1	.3								112	112	23	11
66/ 65		2.4	3.4	3.5	2.7	1.0	.9	.2	.6	.1								131	131	46	18
64/ 63		2.1	4.7	3.8	1.9	2.7	1.3	.2	.3	.1								155	155	85	47
62/ 61	.1	2.7	3.9	3.9	1.3	1.0	.7	.3		.1								126	126	110	54
60/ 59		3.0	3.0	2.4	.9	1.2	1.0	.2		.2								107	107	139	103
58/ 57		1.0	.9	1.1	1.1	.7	.7											49	50	130	94
56/ 55		.8	.1	1.5	.4	.1												26	26	90	104
54/ 53	.1	.3	1.2	.2	.1	.3		.3										24	24	74	91
52/ 51			.2	.3	.2													7	7	50	66
50/ 49		.3	.2		.3	.1												9	9	61	46
48/ 47			.1															1	1	24	55
46/ 45				.1														1	1	15	50
44/ 43																				7	24
42/ 41																				4	48
40/ 39																				4	14
38/ 37																					14
36/ 35																					11
34/ 33																					9
32/ 31																					19
30/ 29																					6
28/ 27																					1
24/ 23																					2
22/ 21																					2
20/ 19																					3
18/ 17																					1
TOTAL	.2	19.8	25.0	23.7	12.7	9.3	8.4	2.3	1.3	1.9	.4	.3	.1					893	894	893	893

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4440242	611190	68.5	16.928	893							
Dry Bulb	3660599	570111	63.8	5.280	894			26.7	3.8	.1	.1	93
Wet Bulb	2983291	513777	57.5	5.544	893			3.5	.1			93
Dew Point	2310774	467082	52.3	8.714	893		3.3	1.1				93

USAFETAC FORM 0-26-5 (OL A) JAN 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33309 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — NOV MONTH

 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
76/ 78											.1							1	1		
74/ 73											.2							2	2		
72/ 71								.1		.1								2	2		
70/ 69								.1		.2								3	3		
68/ 67			.1	.1	.3	.1	.2	.4		.1								13	13		
66/ 65			.3	.3	1.2	.4	.2	.2	.2									27	27		
64/ 63			.4	.3	1.1	1.1	.7	.3	.1									39	39	1	
62/ 61		.5	1.4	.1	.7	.7	.5	.3	.1									40	40	4	
60/ 59	.3	2.2	1.6	1.6	1.2	1.3	.9											84	84	24	9
58/ 57	.5	3.9	2.6	2.6	1.4	1.2	.4											117	117	64	20
56/ 55	.5	3.7	2.4	.1	1.6	.5	.3											103	104	81	56
54/ 53	.2	5.6	3.5	2.4	.8	.1	.2	.1										118	118	116	56
52/ 51	.1	3.2	4.5	1.1	.9	.4	.1											94	95	113	83
50/ 49	.5	4.8	3.6	2.3	2.0	1.0	.1											131	132	154	103
48/ 47	.1	1.5	1.2	1.6	1.1		.2											53	53	119	93
46/ 45		.5	.8	1.1	.1	.4												27	27	65	100
44/ 43		.2	.4	.3	.3	.2												14	14	36	63
42/ 41		.1	.2	.3	.8													13	13	31	70
40/ 39				1.1	.3													13	13	29	39
38/ 37			.2	.7														9	9	5	48
36/ 35		.1	.4	.1														6	6	15	33
34/ 33		.1		.1														2	2	24	28
32/ 31				.1														1	1	8	31
30/ 29																				1	17
28/ 27																				2	12
26/ 25																					10
24/ 23																					13
22/ 21																					12
20/ 19																					7
18/ 17																					7
16/ 15																					2
TOTAL	2.4	28.4	24.0	18.2	13.8	7.8	3.9	1.9	.4	.4	.3							912		915	912
																		912		912	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	4872482	64685	70.9	17.806	912							
Dry Bulb	2712868	49680	54.1	6.376	915		.1	2.1	.3			90
Wet Bulb	2239837	44842	49.2	6.190	912		1.1					90
Dew Point	1860784	40160	44.0	9.017	912		11.0					90

FORM AF 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-510

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | NOV MONTH

0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B.-W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
78/ 77												.2							2	2		
76/ 75												.1							1	1		
72/ 71							.1												1	1		
70/ 69										.2									2	2		
68/ 67					.4			.4	.3	.1									12	12		
66/ 65					1.0	.3	.4	.4	.3										23	23		
64/ 63			.4	.5	.9	1.0	.4	.4	.2	.1									37	37		
62/ 61		.3	.9	.3	.7	.8	.4	.2											33	33	1	
60/ 59		.9	2.6	.4	1.3	.7	1.4												67	67	14	
58/ 57	.4	3.5	2.2	1.3	1.3	1.4	1.0												102	102	38	13
56/ 55	.4	4.8	2.5	3.6	1.7	.2	.7	.1											129	129	86	38
54/ 53	1.0	3.2	3.6	2.5	1.0	.2	.2												107	108	97	89
52/ 51	.3	4.1	3.7	1.9	1.5	.2	.1												109	111	110	58
50/ 49	.4	3.8	3.3	2.7	1.3	.9													114	115	148	73
48/ 47	.3	2.0	1.5	1.4	.9	.4	.1												61	61	132	84
46/ 45		1.1	.8	1.3	1.3	.3													44	44	92	98
44/ 43		.3	.4	.8	.5	.4													23	23	56	74
42/ 41			.5	.2	.7														13	13	38	87
40/ 39				1.2	.3														14	14	32	46
38/ 37			.1	.5	.3														9	9	18	45
36/ 35		.2	.2	.5															9	9	12	52
34/ 33			.2	.1															3	3	25	27
32/ 31			.1																1	1	8	29
30/ 29																					8	28
28/ 27																					1	18
26/ 25																						7
24/ 23																						17
22/ 21																						12
20/ 19																						12
18/ 17																						8
16/ 15																						1
TOTAL	2.9	24.2	23.1	19.4	15.2	6.9	4.9	1.6	.9	.4		.3								920		916
																			916		916	

Element (X)	Σ_x'	Σ_x	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	[illegible]	63017	69.7	17.922	916							
Dry Bulb	[illegible]	49106	53.4	8.469	920		.1	1.8	.3			90
Wet Bulb	[illegible]	44299	48.3	8.194	916		1.7					90
Dew Point	[illegible]	33231	42.8	9.093	916		13.0					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

PAGE 1 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
82/ 81													.2					2	2		
78/ 77												.1						1	1		
76/ 75												.1						1	1		
74/ 73											.1							1	1		
72/ 71								.1	.2	.1								4	4		
70/ 69					.1	.2	.1	.2	.3									9	9		
68/ 67			.1	.1	.9	.4	.8	.4	.5	.3								33	33		
66/ 65				.2	.3	.6	.7	.4	.2									23	23		
64/ 63		.2	.4	.9	.3	1.5	1.1	1.0	.2									52	52	2	
62/ 61		.4	1.1	1.4	.7	1.1	.5	.8										55	55	4	1
60/ 59		.9	2.1	1.6	1.6	1.3	.8	.3										79	79	24	5
58/ 57	.4	3.6	1.9	2.5	1.6	1.4	.3	.2										111	111	52	13
56/ 55	.3	2.5	1.6	2.1	2.1	.8	.3											89	89	94	39
54/ 53	.1	3.7	3.4	2.7	1.8	.2	.5											115	115	95	69
52/ 51	.4	3.5	2.6	.4	1.0	.8	.1											81	81	130	63
50/ 49	.4	2.7	3.5	2.6	1.6	1.0	.4											113	113	142	92
48/ 47	.1	1.0	1.4	1.3	.9	.5												48	49	110	78
46/ 45		.8	.5	1.0	.3	.7												30	31	65	100
44/ 43		.4	.3	1.0	.8													23	23	38	66
42/ 41		.2	.1	.7	.7	.1												16	16	42	70
40/ 39				.3	.7													9	9	26	50
38/ 37		.1	.4	.3	.3													11	11	20	56
36/ 35			.1	.3														4	4	19	47
34/ 33			.1	.1														2	2	17	30
32/ 31																				6	34
30/ 29																				2	18
28/ 27																					24
26/ 25																					13
24/ 23																					12
22/ 21																					11
20/ 19																					12
18/ 17																					4
16/ 15																					4
14/ 13																					1

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | NOV MONTH

PAGE 2 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			
TOTAL	1.9	20.2	19.8	19.7	15.9	10.6	5.7	3.6	1.5	.4	.1	.2	.2					912	914	912

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	4252282	60667	66.5	14.643	912							
Dry Bulb	2787939	50073	54.8	7.000	914			5.0	.5	.2		90
Wet Bulb	2224362	44672	49.0	6.303	912		1.2					90
Dew Point	1746618	39038	42.8	5.211	912		13.1					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

PAGE 1 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
88/ 87														.1	.3			4	4		
86/ 85													.1	.3	.1			5	5		
84/ 83													.1	.3				4	4		
82/ 81											.1	.3	.2					6	6		
80/ 79						.1				.3	.6	.3	.2					14	14		
78/ 77								.1	.4	1.2	.8	.7	.1	.1				31	31		
76/ 75					.1		.4	.2	1.0	1.1	.7	.4	.2					38	38		
74/ 73		.1			.1	.3	.7	.9	1.9	1.2	1.1	.8	.1					65	65		
72/ 71					.3	.6	1.8	1.7	2.1	1.3	.9	.3						81	82	1	
70/ 69			.1		.8	1.8	1.7	2.1	2.0	1.3	.4							92	93	1	1
68/ 67		.1	.1	1.0	2.1	3.1	3.0	2.1	1.3	1.2	.6	.1						133	133	2	1
66/ 65		.1	.1	.8	.9	1.3	1.4	1.4	.6	.1	.1							62	62	4	
64/ 63		.3	1.3	1.4	1.1	2.0	.8	1.0	.6	.6								82	82	16	2
62/ 61		.2	1.6	1.4	1.1	1.0	1.0	.9	.6									70	70	39	5
60/ 59		1.0	1.4	2.3	.4	1.0	.3	.3	.6	.3								70	70	129	10
58/ 57		.8	1.3	.2	.4	.1	.4	.4	.3	.1								39	39	152	32
56/ 55	.4	1.0	.3	.7	.2	.2	.3	.7		.1								36	36	159	57
54/ 53	.8	.9	.2	.2	.3	.2	.4	.4										32	32	124	78
52/ 51		.7	.1	.1		.1	.8	.2										18	18	91	63
50/ 49	.1	.3			.1	.6	.4											14	14	55	97
48/ 47				.1		.2												3	3	28	60
46/ 45				.1														1	1	23	82
44/ 43						.1												1	1	12	53
42/ 41																				22	81
40/ 39																				17	42
38/ 37																				5	18
36/ 35																				1	40
34/ 33																					20
32/ 31																					24
30/ 29																					19
28/ 27																					14
26/ 25																					15
24/ 23																					23
22/ 21																					13

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974-762-510

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-76 YEARS | NOV MONTH

PAGE 2 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
20/ 19																					6
18/ 17																					6
16/ 15																					2
14/ 13																					2
12/ 11																					2
8/ 7																					1
TOTAL	1.3	5.5	6.7	8.5	8.1	12.8	13.5	12.5	11.3	9.0	5.2	3.0	1.1	.9	.4			901	903		901
																		901		901	

Element (X)	$\Sigma X'$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2301807	48678	48.[illegible]	[illegible]467	901							
Dry Bulb	[illegible]	[illegible]	66.1	7.483	903			47.3	16.6	2.7		90
Wet Bulb	2711984	49192	54.6	5.398	901			.4				90
Dew Point	1814232	39598	43.[illegible]	[illegible]09	901		18.9	.2				90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 762-670

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

PAGE 1 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
90/ 89															.9	.3		11	11		
88/ 87														.3	.1	.1		5	5		
86/ 85													.2	.7				8	8		
84/ 83										.1		1.0	.5	.2				16	16		
82/ 81								.1			1.0	1.3	.5	.1	.2			28	28		
80/ 79									.2	1.0	1.7	1.0	.3	.1				39	39		
78/ 77						.1		.6	1.8	1.7	1.9	1.1	1.4					76	76		
76/ 75						.2	.2	1.5	2.2	2.7	2.9	1.6	.3					102	102		
74/ 73					.1	.1	.3	1.7	2.4	1.7	1.8	.8	.1					80	81		
72/ 71			.1		.6	1.4	3.2	2.2	2.4	1.8	.8	.5						113	113		
70/ 69					1.0	1.9	2.2	1.3	1.1	.3	.3	.2						74	74	1	
68/ 67			.3	.5	1.4	1.7	1.1	1.3	.6	.8	.5	.3						74	73	2	1
66/ 65			.3	.9	.7	1.0	.7	.6	.6	.8	.2							51	51	7	
64/ 63		.1	.6	1.4	1.3	.8	.3	.7	.5	.5								53	53	28	1
62/ 61		.5	.3	.6	.3	.3	.1	.1	.8	.2								29	29	118	5
60/ 59	.1	.9	1.0	.5	.2	.2	.2	.2	.3	.1								35	35	161	8
58/ 57		1.3	.1			.3	.3	.2	.3	.2								25	26	175	24
56/ 55	.1	1.1				.2	.3	1.3	.2									29	29	130	57
54/ 53		.3					.7	.3										12	12	101	57
52/ 51	.3	.3	.1				.2											9	9	37	65
50/ 49		.5																4	4	25	97
48/ 47																				29	46
46/ 45																				19	88
44/ 43																				13	60
42/ 41																				21	63
40/ 39																				6	60
38/ 37																					39
36/ 35																					33
34/ 33																					21
32/ 31																					38
30/ 29																					18
28/ 27																					19
26/ 25																					20
24/ 23																					16

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

PAGE 2 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
22/ 21																					10
20/ 19																					10
18/ 17																					7
16/ 15																					2
14/ 13																					3
12/ 11																					2
10/ 9																					1
8/ 7																					1
6/ 5																					1
TOTAL	.6	5.0	3.0	3.8	5.6	8.5	10.1	12.0	13.6	12.1	11.2	7.9	3.3	1.5	1.3	.5		876		873	
																	873		873		

Element (X)	$\Sigma_n X'$	$\Sigma_n X$	$\bar{X}$	σ_n	No. Obs.
Rel. Hum.	[illegible]	[illegible]	[illegible]	[illegible]	873
Dry Bulb	[illegible]	[illegible]	[illegible]	[illegible]	876
Wet Bulb	[illegible]	[illegible]	[illegible]	[illegible]	873
Dew Point	[illegible]	[illegible]	[illegible]	[illegible]	873

Mean No. of Hours with Temperature	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.							
Dry Bulb			64.8	37.6	8.2		90
Wet Bulb			.8				90
Dew Point		12.3	.1				90

USAFETAC FORM AM 66 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-76 YEARS — NOV MONTH

PAGE 1 — 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
90/ 89															.4			4	4		
88/ 87														.2	.2	.1		5	5		
86/ 85														.2	.1			3	3		
84/ 83											.2	.3	.2	.1				8	8		
82/ 81									.1		.4	.7	.1	.1				13	13		
80/ 79									.4	.1	.8	.8	.1	.1	.1			22	22		
78/ 77								.4	1.3	1.1	.8	.9	.4	.2				47	47		
76/ 75						.1	.3	1.1	1.5	2.1	1.5	.7	.2					67	68		
74/ 73						.3	.3	2.1	1.7	1.7	1.2	.4	.1					71	71		
72/ 71					.3	1.0	1.9	2.6	1.5	1.3	.8	.3						87	87		
70/ 69				.1	.8	3.4	1.5	1.1	1.3	.6	.3	.2						83	83		
68/ 67			.1	.7	1.9	3.1	1.9	2.2	.4	.8	.1	.3						104	104		
66/ 65			.3	1.5	2.0	1.5	1.8	1.1	.6	.3	.2							83	83	5	
64/ 63			1.3	1.7	2.1	1.1	.8	.8	.3	.1	.1							75	76	26	
62/ 61		.4	.7	1.5	.6	.6	.7		.6	.6								49	49	88	1
60/ 59		1.3	1.9	1.1	.6	.6	.6	.1	.3									58	58	168	15
58/ 57		.9	1.0	.1	.1	.3	.1	.3	.2									28	28	169	34
56/ 55	.2	1.1	.3			.4		.3	.3									25	25	158	51
54/ 53		1.0	.2	.4	.1	.1	.6	.4	.1									28	28	91	95
52/ 51		.6		.1	.1		.3	.2										12	12	58	99
50/ 49	.1		.1		.2	.2	.3	.1										10	10	43	96
48/ 47		.1			.2	.1												4	4	18	61
46/ 45		.2		.1	.1	.1												5	5	18	66
44/ 43																				16	57
42/ 41																				12	71
40/ 39																				19	52
38/ 37																				4	34
36/ 35																					26
34/ 33																					23
32/ 31																					17
30/ 29																					12
28/ 27																					17
26/ 25																					9
24/ 23																					17

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
22/ 21																					5
20/ 19																					16
18/ 17																					7
16/ 15																					5
14/ 13																					4
12/ 11																					1
TOTAL	.3	5.7	6.2	7.3	9.2	13.0	11.1	13.1	10.8	8.8	6.5	4.7	1.2	1.0	.9	.1		891	893	891	891

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2395868	43493	47.7	20.368	891							
Dry Bulb	4139643	60331	67.8	7.883	893			31.9	24.3	4.3		90
Wet Bulb	2776000	49891	56.0	5.265	891							90
Dew Point	1897818	39711	44.6	9.938	891		11.1					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
80/ 79							.1											1	1		
78/ 77										.1	.2		.1					4	4		
76/ 75					.1					.2	.2							5	5		
74/ 73						.1	.1											2	2		
72/ 71					.1	.3	.2											6	6		
70/ 69					.2	1.3	.6		.4	.1								24	24		
68/ 67				.8	1.8	1.1	.8	.7	.2									48	48	2	
66/ 65			.7	.8	1.5	1.3	.6	.4	.1									48	48		
64/ 63		.3	2.0	1.9	1.8	2.3	1.0	.2	.2									88	88	5	1
62/ 61		1.1	3.4	2.6	2.3	.8	1.2	.2	.1		.1							106	107	25	1
60/ 59	.2	2.3	3.6	4.4	2.3	1.2	.2											128	128	79	18
58/ 57	.2	2.1	2.7	2.7	1.9	.4	.3	.4	.1									98	98	105	44
56/ 55	.1	3.0	2.9	2.3	1.9	.2	.3	.3	.1									101	101	128	59
54/ 53	.2	2.1	1.9	1.6	.9	.6	.6	.1										71	71	135	90
52/ 51	.1	1.6	1.9	1.3	1.3	.6	.6											66	66	112	95
50/ 49	.3	.6	1.3	.8	.3	.8	.3											40	40	98	130
48/ 47		.1	.4	.4		.1												10	10	58	73
46/ 45		.2	.3	.3		.2	.2											12	12	61	74
44/ 43			.6	.2	.4	.3												14	14	29	59
42/ 41			.4	.6	.4													13	13	26	61
40/ 39			.4	.4														8	8	14	37
38/ 37				.2														2	2	10	33
36/ 35																				19	17
34/ 33																				8	16
32/ 31																				1	18
30/ 29																					11
28/ 27																					14
26/ 25																					13
24/ 23																					14
22/ 21																					7
20/ 19																					1
18/ 17																					3
16/ 15																					2
12/ 11																					1

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) AUG 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE: 1974 752-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
8/ 7																					1
TOTAL	1.	2	13.	52	2.	62	1.	31	7.	4	11.	8	7.	2	2.	5	1.	3	.4	.6	.1								895	896	895	895

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	41737	39211	44.2	16.940	895							
Dry Bulb	30690	32107	50.2	6.646	896			9.0	1.2			90
Wet Bulb	24853	44353	52.0	6.151	895		.1	.2				90
Dew Point	19671	41174	44.0	9.028	895		8.7					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE - 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS) NOV (MONTH)

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
80/ 79											.1							1	1		
74/ 73										.2								2	2		
72/ 71						.1												1	1		
70/ 69				.1	.2	.2	.1		.1									7	7		
68/ 67				.1	.8	1.2		.3	.2									24	24		
66/ 65				.2	.8	.2	.3	.1	.3									18	18		
64/ 63			.5	.5	.4	.8	1.1	.3										34	34	1	
62/ 61		.2	1.9	1.2	.5	.7	1.3	.4										57	57	5	
60/ 59		3.3	2.6	2.3	1.9	.9	.8	.3										110	110	30	6
58/ 57	.7	2.1	3.5	2.7	1.4	.3												98	98	74	36
56/ 55	.2	4.6	2.2	2.5	1.1	.4												101	101	76	39
54/ 53	.3	5.2	5.0	1.5	1.1	.2	.1											123	123	119	68
52/ 51	.2	3.4	2.7	2.0	.5	.4	.7											91	92	136	84
50/ 49	.7	4.4	3.5	2.6	1.4	.7	.1											122	123	157	119
48/ 47	.1	.9	1.8	1.0	.7	.4	.2											46	46	84	97
46/ 45		.7	1.2	.5	.2	.3												28	28	76	95
44/ 43		.1	.1		1.1													12	12	45	55
42/ 41		.1	.3	.1	1.3	.2												19	19	40	69
40/ 39		.1	.2	.2	.1													6	6	15	58
38/ 37		.1	.3	.1	.1													6	6	10	46
36/ 35		.1	.2	.2														5	5	21	34
34/ 33			.1															1	1	16	18
32/ 31																				6	13
30/ 29																				1	13
28/ 27																					12
26/ 25																					7
24/ 23																					16
22/ 21																					15
20/ 19																					5
18/ 17																					5
16/ 15																					1
14/ 13																					1
TOTAL	2.2	25.2	26.3	18.1	13.8	7.1	4.7	1.5	.7	.2	.1							912	914	912	912

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4901674	64962	71.21	7.446	912							
Dry Bulb	2758879	49881	54.6	6.310	914			3.4	.3			90
Wet Bulb	2284098	45308	49.7	4.037	912		.7					90
Dew Point	1888043	40713	44.6	3.800	912		8.7					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 752-510

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-75 YEARS | DEC MONTH

PAGE 1 | 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
62/ 61			.1	.1		.1	.3											6	6		
60/ 59			.2	.5	.3	.1												10	10		
58/ 57		.5	.3	.7	.1	.1												15	15	2	
56/ 55	.1	1.3	1.0	.6	.3		.2											31	31	10	4
54/ 53	.2	3.8	1.6	1.5	.5	.5	.1											71	71	31	9
52/ 51	.3	3.0	1.1	1.4	.8	.7												64	64	58	28
50/ 49	1.6	6.7	5.6	2.4	.9	.8	.1											158	158	83	75
48/ 47	.7	4.9	3.8	1.1	1.3	1.0	.2											114	114	92	57
46/ 45	1.3	3.7	1.8	1.5	1.3	.7												89	89	130	90
44/ 43	.2	2.5	3.3	2.4	1.3	.6												90	90	66	59
42/ 41	.2	2.3	3.0	1.3	1.0													68	68	74	77
40/ 39		1.6	4.7	1.3	.1	.1												68	68	69	56
38/ 37		.7	2.0	.6	.2													30	30	100	61
36/ 35		1.0	.8	.8	.3													26	26	66	47
34/ 33		.8	.7	.1	.1													15	15	41	40
32/ 31		.3	.6	.5														12	12	19	84
30/ 29		.2	.1															3	3	17	44
28/ 27																				9	39
26/ 25																				3	24
24/ 23																					28
22/ 21																					15
20/ 19																					4
18/ 17																					10
16/ 15																					9
14/ 13																					6
12/ 11																					2
10/ 9																					2
TOTAL	4.7	33.3	30.9	16.7	8.6	4.7	1.0												870		870
																		870		870	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5004609	64401	74.0	10.528	870							
Dry Bulb	1910334	40428	46.5	6.058	870		1.6					93
Wet Bulb	1629794	37240	42.8	6.414	870		9.1					93
Dew Point	1331800	33078	38.0	9.237	870		28.3					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-810

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) OCT (MONTH)

PAGE 1 0300-0900 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
62/ 61				.1			.3											4	4		
60/ 59			.1	.2	.1	.1												5	5		
58/ 57		.1	.6	.3														9	9		
56/ 55	.2	1.5	.8	.8	.6	.2												36	36	7	2
54/ 53		2.8	1.5	1.5	.5	.6												59	59	22	9
52/ 51	.7	3.6	2.8	.9	.7	.5												79	79	54	22
50/ 49	1.9	4.9	4.4	3.3	1.4	.6												141	142	77	71
48/ 47	.2	3.8	3.1	1.6	1.3	.9	.2											97	98	94	43
46/ 45	.7	4.5	1.4	1.4	1.6	.5	.2											89	89	108	82
44/ 43	.6	2.2	3.4	2.0	.7	.5												80	80	80	60
42/ 41	.1	2.7	4.5	4.4	1.0	.2	.1											113	113	74	75
40/ 39		.8	2.6	2.0	.2	.1												49	49	71	53
38/ 37		.6	1.6	.8	.6													31	31	80	56
36/ 35		.9	1.7	.1	.3													27	27	73	56
34/ 33	.1	1.4	.7	.6	.2													26	26	55	43
32/ 31		.2	.2	.2	.2													10	10	31	65
30/ 29		.2	.1	.1														4	4	15	52
28/ 27			.1	.1														2	2	12	48
26/ 25																				4	45
24/ 23																				4	26
22/ 21																					13
20/ 19																					7
18/ 17																					11
16/ 15																					3
14/ 13																					7
12/ 11																					3
10/ 9																					4
8/ 7																					4
6/ 5																					1
TOTAL	4.5	30.4	29.8	20.6	9.5	4.2	.9											861	863	861	861

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	47896.17	62605	72.7	14.618	861							
Dry Bulb	1888769	59668	66.0	6.199	863		1.7					93
Wet Bulb	1866148	56280	62.1	6.896	861		9.1					93
Dew Point	1840769	51908	57.1	9.327	861		31.2					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-75 YEARS | DEC MONTH

PAGE 1 | 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
70/ 69						.1												1	1		
62/ 61					.1	.1	.1											3	3	1	
60/ 59					.2	.5												6	6		
58/ 57		.5	.8	.2														13	13		
56/ 55		1.3	1.1	.5	.7	.2	.1											33	33	7	1
54/ 53	.1	2.4	2.0	1.9	.6	.8												66	66	28	8
52/ 51	.1	3.1	2.2	1.3	.5	.1	.1											63	63	42	26
50/ 49	1.5	5.3	4.8	2.9	2.4	.5	.4											151	151	80	62
48/ 47	.4	4.1	2.6	2.0	.9	.4	.2											90	90	87	44
46/ 45	.9	4.1	1.8	1.7	1.3	.7	.2											91	91	110	83
44/ 43	.1	1.8	2.0	3.9	1.1	.1	.1											77	78	69	51
42/ 41	.4	1.5	4.0	3.4	1.2	.5												93	93	73	77
40/ 39	.1	1.7	2.2	1.9	.5													54	54	55	53
38/ 37		1.7	.9	1.3		.4												36	36	106	40
36/ 35		.4	1.1	.6	.2	.1												20	20	69	55
34/ 33		.8	1.4	.6	.1													25	25	46	43
32/ 31		1.4	.2	.9														22	22	32	75
30/ 29			.1	.1														2	2	20	52
28/ 27		.1	.1															2	2	14	53
26/ 25																				8	38
24/ 23																			1	1	25
22/ 21																					18
20/ 19																					7
18/ 17																					8
16/ 15																					6
14/ 13																					10
12/ 11																					7
10/ 9																					4
8/ 7																					1
6/ 5																					1
TOTAL	3.7	30.1	27.5	23.2	9.8	4.5	1.9											848	850	848	848

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4391402	60782	71.7	18.648	848							
Dry Bulb	1828667	39018	45.9	9.410	850		3.0	.1				93
Wet Bulb	1351488	35581	42.0	8.744	848		8.2					93
Dew Point	1218221	31077	36.6	9.721	848		33.4					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U.S. GOVERNMENT PRINTING OFFICE—1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) DEC (MONTH)

PAGE 1 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
72/ 71									.1									1	1		
70/ 69									.1									1	1		
68/ 67					.1	.1		.1										3	3		
66/ 65				.1	.1		.5	.4										9	9		
64/ 63			.1	.7	1.3	.8	.6	.1	.7	.5								41	41		
62/ 61			.1	1.6	1.4	1.9	.1	.7	.8	.2								58	59	1	
60/ 59		.2	1.6	1.1	2.3	1.7	2.0	2.0	.8									98	98	4	
58/ 57		1.2	2.4	2.5	1.7	2.5	1.6	1.1	.2									110	110	18	2
56/ 55		1.3	1.9	2.2	2.2	1.0	2.5	.5	.2									98	98	49	13
54/ 53	.6	1.4	1.9	1.6	3.8	2.5	1.8	.5	.5									122	122	81	27
52/ 51	.1	1.2	1.6	1.6	1.2	1.9	.8	.2										72	72	83	43
50/ 49	.4	2.0	1.7	1.4	2.7	2.7	.8	.2										109	109	94	57
48/ 47	.1	.7	.5	.2	1.2	.7	.6											34	34	129	52
46/ 45		.5	.4	.7	1.2	.7	.7											35	35	98	82
44/ 43		.6	.2	.5	.4	.4												17	17	88	48
42/ 41		.2	.7	.6	.4	.4												19	19	81	61
40/ 39					.4	.1												4	4	45	54
38/ 37				.4	.1													4	4	28	43
36/ 35		.1																1	1	22	35
34/ 33			.1															1	1	5	39
32/ 31																				8	60
30/ 29																				3	55
28/ 27																					50
26/ 25																					33
24/ 23																					30
22/ 21																					8
20/ 19																					8
18/ 17																					10
16/ 15																					9
14/ 13																					7
12/ 11																					7
10/ 9																					4
TOTAL	1.2	10.5	13.1	15.1	20.4	17.4	12.1	5.9	3.6	.7								837	838	837	837

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	20866464	47882	57.1	19.480	837							
Dry Bulb	2498878	48912	58.4	8.460	838			.0				93
Wet Bulb	1864138	39811	46.8	8.704	837		1.2					93
Dew Point	1292874	31788	37.9	10.280	837		91.2					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974-742-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION — INCIRLIK AB TURKEY/ADANA STATION NAME — 66-75 YEARS — DEC MONTH

PAGE 1 — 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
74/ 73										.1	.2								3	3		
70/ 69						.4		.6	.2										10	10		
68/ 67					.4	.6	.7	.2		.8	.4								26	26		
66/ 65				.6	.7	1.0	1.3	.4	1.0	1.4	.1								54	54		
64/ 63				1.8	2.9	3.1	2.0	1.2	1.9	1.1	.2								119	119		
62/ 61		.1	1.1	1.7	2.9	2.9	2.4	2.4	1.0	.6									125	125	1	
60/ 59		.6	1.2	2.7	2.1	4.0	3.3	2.7	1.1	.4	.1								154	154	12	
58/ 57		1.1	1.9	1.4	1.2	1.5	1.2	1.2	.5	1.0	.2								94	95	47	3
56/ 55		.6	.6	.8	1.1	2.6	1.7	.7	.2										70	71	89	21
54/ 53		1.1	.5	1.4	.6	1.1	1.9	1.0											63	63	108	33
52/ 51		1.1	1.2	.6		1.0	1.2	.4											45	46	88	35
50/ 49	.5	1.4	1.5	.2	.2	.8	.7	.8											53	53	121	82
48/ 47	.1	.2	.2	.4	.1	.2	.2	.1											14	14	144	55
46/ 45		.2		.4															5	5	79	86
44/ 43		.1				.1	.2												4	4	54	45
42/ 41		.1																	1	2	32	64
40/ 39																					25	34
38/ 37																					13	37
36/ 35																					3	30
34/ 33																					4	30
32/ 31																						59
30/ 29																						38
28/ 27																						42
26/ 25																						42
24/ 23																						16
22/ 21																						11
20/ 19																						13
18/ 17																						7
16/ 15																						11
14/ 13																						11
12/ 11																						3
10/ 9																						2
8/ 7																						3
6/ 5																						2

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S GOVERNMENT PRINTING OFFICE-1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

32308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-75 YEARS | OCT MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
4/ 3																					1
2/ 1																					3
0/ -1																					1
TOTAL	.6	6.7	8.2	12.0	12.1	19.3	16.9	11.7	5.8	5.4	1.3							844			840
																	840		840		

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	[illegible]	[illegible]	[illegible]	[illegible]	840							
Dry Bulb	[illegible]	[illegible]	[illegible]	[illegible]	844			4.2	2			93
Wet Bulb	[illegible]	[illegible]	[illegible]	[illegible]	840							93
Dew Point	[illegible]	[illegible]	[illegible]	[illegible]	840	.1	32.2					93

USAFETAC FORM 0-26-5 (OL A) AM 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-510

3

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) DEC (MONTH)

PAGE 1 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
72/ 71										.1								1	1		
70/ 69							.1	.2				.1						4	4		
68/ 67					.1	.2	.6	.1	.1	.2								12	12		
66/ 65					.4	.5	1.1	.2	.9	.6	.2							33	34		
64/ 63			.2	.5	1.8	2.1	1.3	.9	.2	.9	.1							69	69		
62/ 61			1.2	2.0	1.4	1.4	1.5	1.8	.6	.1								85	85		
60/ 59		.9	1.9	3.5	2.5	2.8	2.6	1.8	.6	.1	.2							144	144	4	
58/ 57		.9	2.7	2.1	2.0	2.1	1.4	.9	.1	.5								109	109	31	5
56/ 55		.8	1.9	1.5	2.1	2.6	.8	.2	.4	.1								89	89	93	16
54/ 53		2.6	2.2	2.3	1.5	.9	1.1	.7										97	97	89	24
52/ 51	.2	.7	2.1	1.1	1.8	.9	.5	.2										64	64	111	52
50/ 49	.6	1.9	2.5	.9	1.2	.9	.2	.5										74	74	126	97
48/ 47	.1	.4	.9	.5	.9	.9	.4	.2										37	37	129	66
46/ 45	.1	.1	.1	.4	.5	.4												13	13	98	73
44/ 43		.1	.1	.5	.4	.2	.1											12	12	60	56
42/ 41			.1	.4	.4													7	7	38	69
40/ 39																				33	48
38/ 37				.1	.1													2	2	23	63
36/ 35																				8	30
34/ 33																				6	47
32/ 31																				2	42
30/ 29																				1	34
28/ 27																					26
26/ 25																					24
24/ 23																					23
22/ 21																					10
20/ 19																					8
18/ 17																					7
16/ 15																					6
14/ 13																					6
12/ 11																					6
10/ 9																					4
8/ 7																					5
6/ 5																					1

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AS 44 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE—1974 762-510

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33908 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) DEC (MONTH)

PAGE 2 1500-1700 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
-2/ -3																					1
TOTAL	1.1	8.5	16.0	15.7	16.9	16.1	11.6	7.9	2.9	2.7	.6	.1						852		852	852

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	91146789	486439	57.1	19.082	852							
Dry Bulb	27411189	48181	56.6	21.277	852			1.9				93
Wet Bulb	20234888	41488	48.6	18.337	852		.2					93
Dew Point	14133858	33818	39.7	20.104	852	.1	21.8					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-75 (YEARS) DEC (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
68/ 67							.1											1	1		
66/ 65									.1									1	1		
64/ 63							.1											1	1		
62/ 61					.1	.4	.2											6	6		
60/ 59		.5	.8	.5	.4	.2												20	20		
58/ 57		1.8	2.2	1.4	.2	.1	.1	.1										51	51	8	
56/ 55	.1	1.5	2.0	1.3	.5	.4	.2											51	51	29	11
54/ 53	.2	5.1	2.6	1.5	1.2	.8	.5											102	102	51	17
52/ 51	.1	5.0	3.7	1.5	1.2	.2	.2											103	103	87	46
50/ 49	.6	5.7	6.7	4.2	2.0	.5	.2											170	171	107	87
48/ 47	.4	2.6	3.4	2.0	.9	.5	.1											84	84	96	83
46/ 45	.1	2.6	2.9	2.5	.7	.9	.1											84	84	111	76
44/ 43	.1	1.6	2.0	1.8	.6	.4												57	57	84	68
42/ 41		1.1	3.3	.9	1.3	.8												63	63	80	68
40/ 39	.1	.7	1.5	.4	.7													29	30	68	62
38/ 37		1.1	.5	.1	.1	.1												16	16	47	48
36/ 35		.6	.2	.4	.1	.1												12	12	43	61
34/ 33		.2			.2													4	4	28	52
32/ 31		.2																2	2	12	71
30/ 29																				5	21
28/ 27																				5	10
26/ 25																					20
24/ 23																					9
22/ 21																					8
20/ 19																					12
18/ 17																					3
16/ 15																					11
14/ 13																					3
12/ 11																					4
10/ 9																					3
8/ 7																					1
6/ 5																					2
TOTAL	1.8	30.2	31.7	18.2	10.4	5.4	2.0	.1	.1									887	859	887	857

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4746784	68168	76.8	9.778	887							
Dry Bulb	289[illegible]	4[illegible]	45.[illegible]	[illegible]	859		.2	.1				93
Wet Bulb	2[illegible]	[illegible]	44.[illegible]	[illegible]	887		5.4					93
Dew Point	[illegible]	[illegible]	[illegible]	[illegible]	887		19.1					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U. S. GOVERNMENT PRINTING OFFICE: 1974 757-670

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

33308 STATION | INCIRLIK AB TURKEY/ADANA STATION NAME | 66-75 YEARS | DEC MONTH

PAGE 1 | 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
64/ 63							.2											2	2		
62/ 61				.1	.1	.2	.3											7	7		
60/ 59			.3		.1													4	4		
58/ 57		1.0	.5	.7			.1											20	20	1	
56/ 55		1.8	1.3	.7	.5	.8												44	44	17	4
54/ 53	.1	3.3	1.4	1.5	1.3	.5	.1											71	71	30	15
52/ 51	.1	3.9	1.6	.6	.5	.6	.2											65	65	56	35
50/ 49	1.4	7.1	4.5	2.1	1.6	.6	.3											153	153	91	63
48/ 47	.7	5.3	3.3	1.5	1.0	.5	.2											109	109	99	62
46/ 45	1.0	3.4	2.9	1.8	.6	.6	.2											92	92	109	96
44/ 43	.1	3.6	2.1	3.2	.3	.7												87	87	86	61
42/ 41	.5	3.8	3.8	1.1	1.4	.6												97	97	91	69
40/ 39		1.5	2.5	.8	.5													46	46	79	73
38/ 37		2.0	.5	.7	.6													32	32	77	65
36/ 35	.1	1.5	.5	.2														20	20	52	50
34/ 33		.9	.2		.1													11	11	42	47
32/ 31			.3	.6	.1													9	9	23	80
30/ 29		.1		.1														2	2	7	32
28/ 27																				6	33
26/ 25																				5	18
24/ 23																					24
22/ 21																					10
20/ 19																					9
18/ 17																					7
16/ 15																					8
14/ 13																					7
12/ 11																					6
10/ 9																					1
8/ 7																					1
TOTAL	4.0	39.3	23.6	15.7	8.6	4.9	1.8												871		871
																		871		871	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3118888	68888	74.7	17.178	871							
Dry Bulb	3868415	68884	44.4	8.884	871		1.2					93
Wet Bulb	3681188	37668	43.2	8.884	871		4.4					93
Dew Point	3367781	33667	31.8	9.831	871		26.7					93

FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC FORM 0-26-5 (OL A)

U. S. GOVERNMENT PRINTING OFFICE: 1974 762-610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DRY-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS)

HRS (L S T)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00-02	MEAN	43.7	44.3	49.5	55.3	61.4	68.0	74.5	74.6	69.5	62.5	54.1	46.5	58.5
	S D	6.437	6.266	5.914	5.595	4.987	4.437	3.275	3.016	4.035	5.074	6.376	6.038	12.044
	TOTAL OBS	880	770	822	792	789	781	769	797	877	883	915	870	9945
03-05	MEAN	43.1	43.6	48.8	54.0	59.7	65.8	72.0	72.2	67.7	61.5	53.4	46.0	57.2
	S D	6.440	6.496	6.105	5.784	4.831	3.983	3.442	3.119	3.739	4.698	6.465	6.159	11.443
	TOTAL OBS	871	758	818	799	781	778	747	799	878	902	920	863	9914
06-08	MEAN	43.2	44.5	51.2	58.9	67.4	74.1	78.5	77.9	73.3	65.3	54.8	45.9	61.1
	S D	6.543	6.156	6.389	6.395	6.137	5.101	3.888	4.312	5.692	6.634	7.000	6.410	13.970
	TOTAL OBS	873	765	818	784	784	795	761	807	858	899	914	850	9908
09-11	MEAN	51.2	53.1	60.5	68.3	76.3	83.0	86.8	86.8	84.5	77.2	66.1	54.3	70.6
	S D	6.122	5.891	6.029	6.920	6.632	5.171	3.800	3.232	4.698	6.415	7.483	5.660	14.161
	TOTAL OBS	860	751	820	799	791	804	766	807	884	904	903	838	9927
12-14	MEAN	56.1	57.2	64.3	72.0	80.3	87.3	90.9	91.3	89.3	81.7	70.3	58.6	74.9
	S D	6.304	6.041	6.995	8.262	7.609	5.655	4.027	3.401	5.345	6.645	7.849	5.204	14.418
	TOTAL OBS	878	763	819	779	801	788	780	821	879	913	876	844	9941
15-17	MEAN	54.2	56.1	63.5	70.5	78.6	85.2	88.8	88.8	86.5	79.0	67.5	56.4	72.8
	S D	6.534	6.197	6.907	8.198	7.438	5.959	3.984	3.316	5.644	6.889	7.855	5.577	14.191
	TOTAL OBS	879	763	816	794	775	787	782	806	875	899	893	853	9916
18-20	MEAN	46.8	49.1	56.3	63.3	71.3	78.2	82.2	82.0	78.1	69.7	58.2	49.0	65.2
	S D	5.961	5.858	5.633	6.389	6.150	5.108	3.760	3.231	4.483	5.793	6.646	5.717	13.867
	TOTAL OBS	885	774	834	795	798	792	784	809	894	900	896	859	10017
21-23	MEAN	44.1	45.8	51.0	57.2	64.3	71.3	77.0	76.9	71.8	63.8	54.6	46.8	60.2
	S D	6.148	6.097	5.833	5.260	5.040	4.051	2.883	2.591	4.472	5.288	6.310	5.936	12.716
	TOTAL OBS	881	775	828	798	796	787	779	810	879	894	914	871	10002
ALL HOURS	MEAN	47.8	49.1	55.6	62.4	69.9	76.7	81.4	81.4	77.6	70.1	59.8	50.4	65.0
	S. D.	8.099	8.003	8.657	9.420	9.673	9.023	7.440	7.368	9.109	9.654	9.356	7.604	14.873
	TOTAL OBS	7007	6119	6475	6340	6292	6312	6168	6456	7084	7194	7231	6848	79370

USAFETAC FORM JUL 64 0-89-5 (OLA)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

WET-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

33308 — STATION
INCIRLIK AB TURKEY/ADANA — STATION NAME
66-76 — YEARS

HRS (L S T)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00-02	MEAN	39.7	40.5	46.4	52.6	58.6	64.4	70.1	70.4	64.4	56.9	49.2	42.8	54.4
	S D	6.369	6.605	5.825	4.558	4.041	4.493	3.969	4.228	4.941	5.576	6.190	6.414	11.882
	TOTAL OBS	878	769	820	788	784	779	768	797	874	882	912	870	9921
03-05	MEAN	39.0	39.7	45.4	51.3	57.3	63.0	68.4	68.5	62.9	56.0	48.3	42.1	53.8
	S D	6.482	6.771	5.991	4.703	3.886	4.248	4.007	4.142	4.954	5.556	6.194	6.396	11.547
	TOTAL OBS	869	757	816	799	780	773	747	797	873	900	916	861	9888
06-08	MEAN	39.0	40.2	46.9	54.6	62.0	67.3	71.6	71.6	65.8	57.7	49.0	42.0	55.4
	S D	6.450	6.581	5.990	4.881	3.869	4.039	3.891	4.245	5.526	6.047	6.303	6.744	12.799
	TOTAL OBS	869	764	814	781	781	794	761	806	856	896	912	848	9882
09-11	MEAN	43.7	45.4	51.8	58.6	64.4	68.8	72.8	73.2	68.9	62.5	54.6	46.8	59.2
	S D	5.584	5.925	5.819	4.216	3.327	3.752	3.226	3.619	4.669	5.397	5.395	5.706	11.263
	TOTAL OBS	859	749	815	798	790	803	761	806	882	902	901	887	9903
12-14	MEAN	46.5	47.7	53.6	59.8	65.4	69.9	73.9	74.0	69.5	63.5	56.2	49.3	60.7
	S D	5.229	5.598	5.095	4.301	3.541	3.804	3.107	3.448	4.247	4.778	5.132	5.220	10.623
	TOTAL OBS	875	762	815	774	800	788	779	818	877	912	873	840	9913
15-17	MEAN	45.9	47.4	53.6	59.2	64.8	69.2	73.3	73.6	69.6	63.0	55.6	48.6	60.2
	S D	5.477	5.672	4.981	4.245	3.391	3.410	2.841	3.034	4.072	4.751	5.265	5.337	10.628
	TOTAL OBS	871	763	813	794	772	784	778	804	874	897	891	852	9893
18-20	MEAN	42.3	44.2	51.1	57.1	63.0	67.9	72.2	72.7	68.4	60.9	52.0	44.9	57.9
	S D	5.996	6.248	5.198	4.090	3.350	3.511	2.893	3.070	4.342	5.596	6.151	6.170	11.657
	TOTAL OBS	881	770	829	794	793	790	781	806	891	896	895	857	9983
21-23	MEAN	40.2	41.5	47.8	53.9	60.4	66.3	71.7	71.7	65.7	57.5	49.7	43.2	55.6
	S D	6.178	6.342	5.857	4.199	3.762	4.169	3.330	3.696	5.176	5.544	6.037	6.266	12.099
	TOTAL OBS	880	772	824	791	786	785	775	809	877	893	912	871	9975
ALL HOURS	MEAN	42.6	43.3	49.8	55.9	62.0	67.1	71.8	72.0	66.9	59.7	51.8	44.9	57.1
	S. D.	6.623	6.960	6.508	5.332	4.604	4.530	3.778	4.089	5.313	6.123	6.579	6.666	11.872
	TOTAL OBS	6982	6100	6940	6319	6286	6296	6150	6443	7004	7178	7212	6836	79356

USAFETAC FORM JUL 64 0-89-5 (OLA)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DEW-POINT TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (YEARS)

HRS (L S T)		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00-02	MEAN	33.9	35.0	42.9	50.1	56.5	62.0	67.7	68.0	60.9	52.0	44.0	38.0	50.6
	S D	9.378	10.092	8.125	5.322	4.938	6.528	6.404	6.160	7.733	9.074	9.017	9.237	14.076
	TOTAL OBS	878	769	820	788	784	779	768	797	874	882	912	870	9921
03-05	MEAN	33.0	34.0	41.4	48.8	55.4	61.0	66.1	66.3	59.5	51.0	42.8	37.1	49.4
	S D	9.733	10.194	8.576	5.767	4.750	6.110	6.527	6.453	8.198	9.416	9.095	9.537	14.028
	TOTAL OBS	869	757	816	799	780	773	747	797	873	900	916	861	9888
06-08	MEAN	32.8	34.0	41.9	51.0	58.4	63.2	67.9	68.2	60.7	51.2	42.8	36.6	50.5
	S D	9.496	10.145	8.949	5.991	4.803	6.915	6.830	7.141	9.297	9.922	9.218	9.721	14.952
	TOTAL OBS	869	764	814	781	781	794	761	806	856	896	912	848	9882
09-11	MEAN	33.7	35.5	43.1	51.0	56.6	60.3	65.4	66.2	59.1	51.4	43.7	37.9	50.2
	S D	10.384	10.964	9.639	6.332	5.849	7.755	7.060	7.811	10.179	10.706	10.091	10.280	14.202
	TOTAL OBS	859	749	815	798	790	803	761	806	882	902	901	837	9903
12-14	MEAN	34.4	36.3	43.1	50.5	55.6	59.7	65.4	65.3	57.4	50.0	43.0	38.4	49.8
	S D	11.038	10.978	9.541	6.480	6.649	8.048	6.957	7.672	9.703	10.188	10.260	11.117	13.926
	TOTAL OBS	875	762	815	774	800	788	779	818	877	912	873	840	9913
15-17	MEAN	35.3	36.9	44.0	50.9	55.8	59.8	65.6	66.1	59.6	51.3	44.6	39.7	50.6
	S D	10.969	10.822	9.138	6.145	5.692	6.927	5.799	5.773	8.747	9.716	9.923	10.304	13.396
	TOTAL OBS	871	763	813	794	772	784	778	804	874	897	891	852	9893
18-20	MEAN	36.1	38.0	46.0	52.1	57.3	61.7	67.1	68.0	62.6	54.2	46.0	39.9	52.3
	S. D.	9.534	9.815	7.703	5.178	5.017	6.277	5.317	5.144	7.033	8.979	9.025	9.338	13.160
	TOTAL OBS	881	770	829	794	793	790	781	806	891	896	895	857	9983
21-23	MEAN	34.8	36.2	44.4	51.2	57.6	63.2	68.9	69.0	61.7	52.3	44.6	38.5	51.6
	S. D.	9.508	9.951	7.882	4.971	4.817	6.139	5.499	5.264	7.806	8.714	8.800	9.221	14.006
	TOTAL OBS	869	778	824	791	786	788	775	809	877	893	912	871	9975
ALL HOURS	MEAN	34.2	35.7	43.3	50.6	56.7	61.4	66.8	67.1	60.2	51.7	43.9	38.3	50.6
	S. D.	10.074	10.459	8.784	5.899	5.443	6.994	6.442	6.616	8.775	9.679	9.489	9.909	14.002
	TOTAL OBS	6982	6109	6848	6219	6286	6296	6180	6443	7004	7178	7212	6836	79338

USAFETAC FORM 0-09-5 (OL-A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 66-76 (PERIOD) ALL (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JAN	ALL	100.0	98.3	92.2	82.6	69.8	56.2	40.9	25.5	9.8	63.1	6982
FEB		100.0	99.2	93.4	82.9	69.3	54.4	41.3	27.2	11.7	63.5	6106
MAR		99.9	98.7	94.2	85.7	76.0	63.7	50.7	32.3	15.7	67.2	6546
APR		100.0	99.5	95.5	88.2	77.8	65.6	53.1	37.8	19.7	69.2	6319
MAY		100.0	98.6	94.6	86.4	74.1	61.4	48.7	35.8	16.4	67.1	6286
JUN		99.9	97.6	92.2	83.5	69.3	54.4	42.7	30.2	10.4	63.6	6297
JUL		100.0	98.2	94.5	88.5	75.6	56.7	44.3	28.5	5.0	64.7	6150
AUG		99.8	98.8	95.7	90.3	76.0	58.1	45.2	28.4	4.4	65.2	6443
SEP		99.7	95.6	88.7	79.0	64.7	51.0	38.2	21.6	4.6	59.8	7004
OCT		99.8	95.6	85.4	73.8	58.8	45.4	32.9	19.1	5.2	57.0	7178
NOV		100.0	97.3	88.8	77.7	64.8	50.7	37.4	21.9	9.2	60.3	7212
DEC		99.9	99.1	94.9	87.2	75.7	62.3	46.9	29.1	11.6	66.3	6836
TOTALS		99.9	98.0	92.5	83.8	71.0	56.7	43.5	28.1	10.3	63.9	79359

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (PERIOD) JAN (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JAN	00-02	100.0	100.0	98.2	92.9	84.6	72.6	52.4	34.1	12.3	70.4	878
	03-05	100.0	100.0	98.0	93.0	83.5	68.8	49.5	32.8	13.3	69.5	869
	06-08	100.0	100.0	98.2	93.7	81.7	67.0	48.2	30.5	12.0	68.7	869
	09-11	100.0	98.0	87.7	72.1	51.9	35.4	26.1	13.7	4.9	54.7	859
	12-14	99.9	92.6	77.9	57.5	40.2	25.9	18.7	10.2	4.8	48.3	875
	15-17	99.9	95.5	82.5	68.7	51.7	36.6	24.6	13.7	5.5	53.2	871
	18-20	100.0	99.9	96.9	90.9	80.4	68.9	51.0	31.7	11.8	68.6	881
	21-23	100.0	100.0	98.0	92.3	84.1	74.4	56.7	37.5	13.5	71.3	880
TOTALS		100.0	98.3	92.2	82.6	69.8	56.2	40.9	25.9	9.8	63.1	6982

USAFETAC FORM AWS 64 0-87-5 (OL A)

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

33308 (STATION) INCIRLIK AB TURKEY/ADANA (STATION NAME) 67-76 (PERIOD) FEB (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
FEB	00-02	100.0	100.0	99.1	93.6	84.0	70.7	56.3	40.2	19.4	71.9	769
	03-05	100.0	100.0	98.4	93.9	83.5	69.6	53.8	36.1	19.8	71.2	757
	06-08	100.0	100.0	98.7	93.5	82.5	64.1	45.5	31.7	16.0	68.8	764
	09-11	100.0	99.1	88.5	71.0	52.1	35.2	25.6	15.1	3.6	54.5	749
	12-14	99.9	97.4	80.3	59.2	38.8	26.4	19.9	10.0	2.4	49.0	762
	15-17	100.0	97.2	84.5	66.6	46.7	32.9	23.5	12.8	3.4	52.3	763
	18-20	100.0	100.0	98.8	91.2	80.4	63.2	46.8	28.4	10.9	67.6	770
	21-23	100.0	99.9	98.6	94.0	86.1	73.1	59.1	43.0	18.3	72.8	772
TOTALS		100.0	99.2	93.4	82.9	69.3	54.4	41.3	27.2	11.7	63.5	6106

USAFETAC FORM 0-87-3 (OL A)

END

DATE
FILMED

5-80

DTIC