

LEVEL II

AGARD-R-683

AGARD-R-683

AGARD

ADVISORY GROUP FOR AEROSPACE RESEARCH & DEVELOPMENT

7 RUE ANCELLE 92200 NEUILLY SUR SEINE FRANCE

ADA 082959

AGARD REPORT No. 683

**Design, Development and Implementation
of an Active Control System for
Load Alleviation for a
Commercial Transport Airplane**

NORTH ATLANTIC TREATY ORGANIZATION

DTIC
ELECTRONIC
S APR 10 1980
E

DDC FILE COPY

DISTRIBUTION AND AVAILABILITY
ON BACK COVER

DISTRIBUTION STATEMENT
Approved for public release
Distribution Unlimited

80 4 10 127

NORTH ATLANTIC TREATY ORGANIZATION
ADVISORY GROUP FOR AEROSPACE RESEARCH AND DEVELOPMENT
(ORGANISATION DU TRAITE DE L'ATLANTIQUE NORD)

AGARD Report No.683

DESIGN, DEVELOPMENT AND IMPLEMENTATION OF AN ACTIVE
CONTROL SYSTEM FOR LOAD ALLEVIATION FOR A COMMERCIAL
TRANSPORT AIRPLANE

by

R.F. O'Connell
Division Engineer
Aeromechanics Division
Lockheed-California Company
Burbank, CA 91520, USA

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

Paper presented at the 49th Structures and Materials Panel Meeting,
Porz-Wahn, Germany, October 1979.

400042

12

THE MISSION OF AGARD

The mission of AGARD is to bring together the leading personalities of the NATO nations in the fields of science and technology relating to aerospace for the following purposes:

- Exchanging of scientific and technical information;
- Continuously stimulating advances in the aerospace sciences relevant to strengthening the common defence posture;
- Improving the co-operation among member nations in aerospace research and development;
- Providing scientific and technical advice and assistance to the North Atlantic Military Committee in the field of aerospace research and development;
- Rendering scientific and technical assistance, as requested, to other NATO bodies and to member nations in connection with research and development problems in the aerospace field;
- Providing assistance to member nations for the purpose of increasing their scientific and technical potential;
- Recommending effective ways for the member nations to use their research and development capabilities for the common benefit of the NATO community.

The highest authority within AGARD is the National Delegates Board consisting of officially appointed senior representatives from each member nation. The mission of AGARD is carried out through the Panels which are composed of experts appointed by the National Delegates, the Consultant and Exchange Programme and the Aerospace Applications Studies Programme. The results of AGARD work are reported to the member nations and the NATO Authorities through the AGARD series of publications of which this is one.

Participation in AGARD activities is by invitation only and is normally limited to citizens of the NATO nations.

The content of this publication has been reproduced directly from material supplied by AGARD or the author.

Published February 1980

Copyright © AGARD 1980
All Rights Reserved

ISBN 92-835-1348-7



*Printed by Technical Editing and Reproduction Ltd
Harford House, 7-9 Charlotte St, London W1P 1HD*

PREFACE

The Sub-Committee on Aeroelasticity of the Structures and Materials Panel has a permanent interest in all applications of active control technology that might help in improving the behaviour of the structure; load alleviation, flutter suppression etc. The very first application of the concept of manoeuvre load reduction to a large civil aircraft, with immediate interest to the airlines, is the system developed by Lockheed for the L-1011. In particular, certification problems had to be addressed by the firm, with the many new aspects introduced by the active control technology.

Mr O'Connell's presentation was very brilliant, and the Sub-Committee unanimously agreed that it should be published as an AGARD Report. This publication will certainly help the understanding of the possibilities and the difficulties that appear once active control technology leaves the comfort of experimental work and deals with large practical applications.

G.COUPRY
Chairman, Sub-Committee
on Aeroelasticity

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/ _____	
Availability Codes	
Dist	Avail and/or special
A	

CONTENTS

	Page
PREFACE	iii
SUMMARY	1
INTRODUCTION	1
DESIGN CRITERIA	1
SYSTEM DESCRIPTION	4
General	4
Production ACS	5
Control Law and Computer	5
System Availability	7
TEST RESULTS	7
<i>Certification Criteria</i>	8
Conclusion	9
REFERENCES	15

DESIGN, DEVELOPMENT AND IMPLEMENTATION OF AN ACTIVE
CONTROL SYSTEM FOR LOAD ALLEVIATION FOR A COMMERCIAL TRANSPORT AIRPLANE

R. F. O'Connell
Division Engineer
Aeromechanics Division
Lockheed-California Company
P.O. Box 551, Burbank, CA 91520

SUMMARY

An active control system for load alleviation has been developed for a long-range version of the Lockheed L-1011. This system, which permits the use of an extended wing span for fuel conservation with minimum structural change, will be introduced into commercial service in early 1980. The system is described and the criteria to which it is designed are discussed. Examples of flight test data obtained from a prototype version of the system installed on the flight test airplane are presented, and comparisons of these results with analytical predictions are shown. A basis for certification of such systems is presented, assuring a level of safety equivalent to that of a conventional design.

INTRODUCTION

Lockheed-California Company has for many years conducted research in the area of active controls. Prior to 1974, however, the applications investigated were primarily concerned with flight-critical controls functions implemented by means of highly reliable active control systems. These applications required long-term development efforts and were largely associated with control configured aircraft of the future. In 1974, the emphasis of the active controls research activity shifted to applications of state-of-the-art systems to the present generation of wide-body commercial transports. Initially, these efforts took the form of providing a level of load alleviation which would permit increasing the gross take-off weight of an L-1011 derivative while minimizing wing structural changes. In mid-1975, an even more compelling objective was identified: wing span extension of the L-1011 in order to achieve improved fuel economy (Ref. 1, 2). As in the previous application, load alleviation through the use of active controls is used to minimize wing structural changes. A breadboard active control system was developed to assess the feasibility of this objective, and the system was flight tested under funding from the NASA Aircraft Energy Efficiency program beginning in mid-1977 and extending through 1978. The results of these research activities (Ref. 3) were so uniformly encouraging that the concepts were incorporated in an advanced design configuration early in 1978. The resulting production configuration will be certificated early in 1980 and will enter commercial service shortly thereafter. It is this production program which is the subject of the present paper.

DESIGN CRITERIA

The primary design objective of the active control system (ACS), as indicated earlier, is to minimize structural changes to the L-1011 wing resulting from the wing span extension of nine feet (Fig. 1). The effect of this span extension is to increase both the maneuver loads and gust loads imposed on the wing, which in a conventional design might

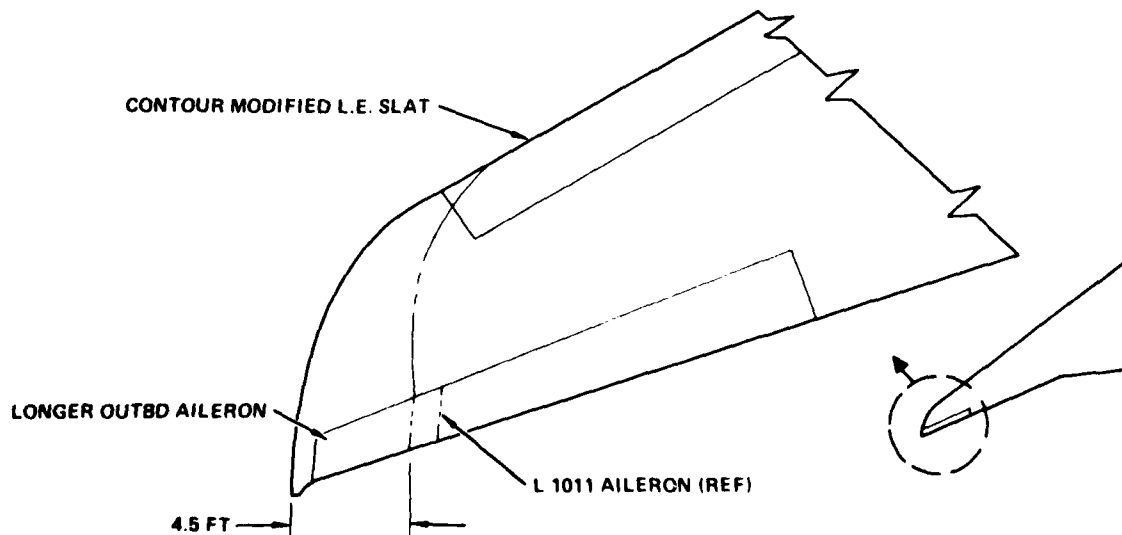


Figure 1. Extended Span Wing

require the structural redesign of major portions of the wing. To minimize the extent of this redesign, the maneuver load and gust load increments resulting from the span extension must be eliminated or greatly reduced by the active control system. In accomplishing this reduction of loads, a further requirement of the ACS is that the stability, control, and handling qualities of the basic airplane must remain substantially unchanged. In addition, the modal response characteristics of the airplane must either be unchanged or must remain within acceptable limits.

The primary area to be addressed by the design criteria, however, concerns the reliability of the ACS and the consequences of the fact that the system will be unavailable in flight a small percentage of the time. Since the ACS is employed to reduce the design flight loads of the wing, it is clear that some reduction of capability to sustain maneuvers and gusts exists during the time the ACS is inoperative. At the same time, criteria adopted at Lockheed required that the airplane with ACS demonstrate the same level of safety as that of a conventionally designed airplane. One obvious way to achieve this is to employ an ACS so reliable that the failure of the system need not be considered. Most regulatory agencies quantify this in terms of a probability of failure of 10^{-9} or less per flight hour. Although such systems are conceptually possible, and research and development of such systems is in progress, they are not likely to be available until some time in the 1990's (Ref. 4). To make use of active systems which are presently feasible, and which incorporate portions of existing systems on current commercial transports, probabilities of system failure in the range of 10^{-6} to 10^{-3} per flight hour must be accommodated. The lower end of this range would be representative of systems having maximum redundancy levels, while the upper end of this range would apply to such systems in lower states of redundancy due to one or more system faults. In view of this, it is clear that the required level of safety cannot presently be assured by means of increased system reliability alone. Another approach must be adopted.

The method of assuring an equivalent level of safety to that of conventional design practices may be discerned by examining the procedure for developing gust loads resulting from the response of the airplane to continuous turbulence (Ref. 5). In this procedure, the significant response (load) quantities are analyzed to determine the frequency distribution of peak response levels. From these data, the relationship between the level of the response quantity and the frequency of exceedance of that level is determined. This done, the selection of an acceptable frequency of exceedance of limit load then determines that load. The analysis which derives the frequency of exceedance of the various response quantities considers all those parameters which influence the responses: airplane configuration, flight condition, weight, center-of-gravity location, etc. The variation of these parameters is represented by performing the analysis for a large number of combinations of these parameters, and associating the appropriate percentage of the total airplane operational time with each combination. It is a logical extension of such an analysis to include the functional state of the ACS as an additional parameter, once the expected rate of system unavailability is known. The effect of system unavailability on gust loads is to increase the frequency of exceedance of given levels of certain of these loads, requiring the selection of higher design limit levels of these loads in order to maintain the same frequency of exceedance as for conventional designs. One requirement for the establishment of equivalent safety is then: the frequency of exceedance of design limit load shall be no greater for the airplane designed with the ACS than for a conventionally designed airplane.

Although the procedure described above adequately provides for the determination of the effect of system reliability on gust loads, it cannot be applied in the same manner to maneuver loads. The determination of limit design maneuver loads has traditionally been based on deterministic criteria using design envelope conditions rather than typical operating conditions. Not only is there no general acceptance of a probabilistic approach to the determination of maneuver loads, but also there exists no body of data on conventionally designed airplanes which may be used to determine an acceptable frequency of exceedance of design limit load. To adhere more closely to the deterministic traditions in the formulation of maneuver loads, the equivalent safety requirement is revised to state that the frequency of exceedance of limit maneuver load factor, in any given design-envelope flight condition, will be no greater than for a conventionally designed airplane. This leads to the procedure illustrated in Fig. 2 and explained in detail in Ref. 6, wherein NASA maneuver acceleration data are used to determine design limit load factors for system on and system off which will result in a combined frequency of exceedance equal to that associated with a load factor of 2.5. In this example, the in-flight availability is assumed to be 99.9 percent and a system-off limit load factor capability of 1.8 is used, giving a system-on design limit load factor of 2.54. It should be noted that the results obtained are not sensitive to the absolute level of the frequency of exceedance data, but are dependent on the shape of the frequency of exceedance curve. This sensitivity may be accommodated by applying a reasonable tolerance in fitting the data. In passing, it should be mentioned that the frequency of exceedance of 3.2×10^{-5} per flight associated with a load factor of 2.5 in Fig. 2 is roughly equal to the 2×10^{-5} per flight hour frequency of exceedance used in the determination of design limit gust loads. The corresponding frequency of exceedance of limit maneuver load, considering typical operating conditions, would be in the 10^{-7} to 10^{-8} per flight hour range. Using this same exceedance curve, and still assuming an in-flight availability 99.9 percent, the locus of load factor pairs resulting in equal frequency of exceedance is determined (Fig. 3). It will be seen that the effect of system unavailability is to increase the system-on design limit load factor to compensate for the increased frequency of exceedance of limit load factor during the time the system is inoperative. A

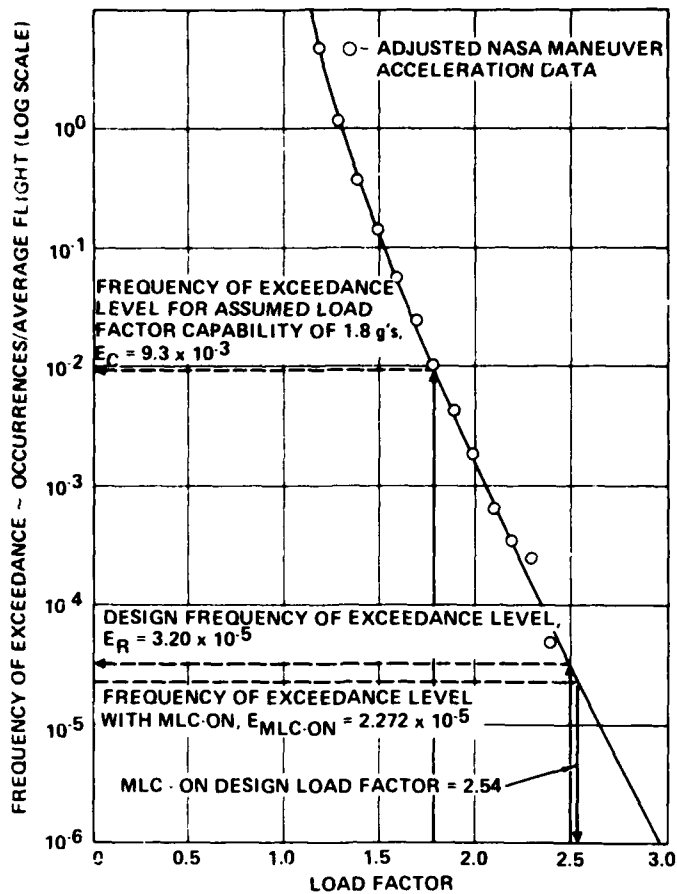


Figure 2. Example of Accounting for MLC System In-Flight Availability in Determining Design Maneuver Loads

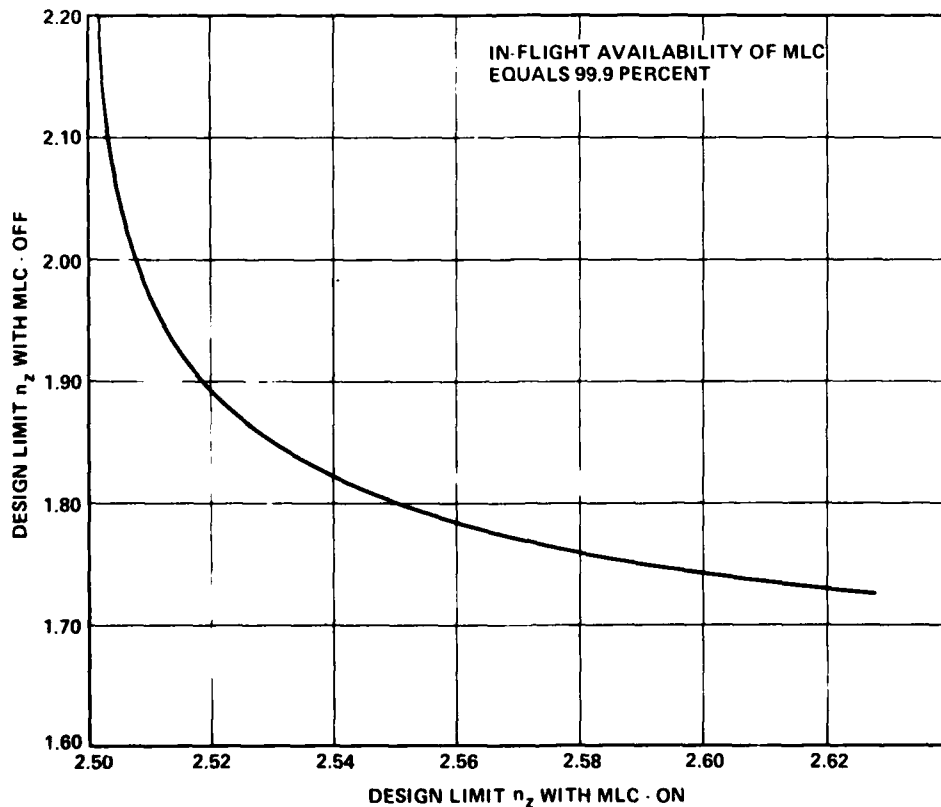


Figure 3. Limit Design Load Factor MLC-ON vs MLC-OFF

further result is to impose an effective lower limit on the system-off Design limit load factor which may be used in conjunction with a given system availability. Curves for other values of system availability are shown in Ref. 6.

Once an equivalent frequency of exceedance of limit load, or limit load factor, is assured, the behavior of the system in response to parameters above limit must be examined. For the equivalent safety concept to extend to the region above limit load, a further requirement must be imposed on the airplane designed with the ACS. This may be stated that, for the airplane designed with ACS, the margins above the limit load level will be essentially as great as those for a conventionally designed airplane. Since the ACS has limited control surface deflection and rate capabilities, as do all such systems, the effect of these nonlinearities on the margins above limit load must be determined.

The limitation of control surface deflection primarily affects maneuver loads and gust loads in the low frequency region. The effect on maneuver loads will be illustrated although the effect on gust loads is comparable. The case of the conventionally designed airplane is represented by the solid line relating load factor to relative stress in Fig. 4. Limit load corresponds to a load factor of 2.5. Ultimate load is taken as 150 percent of this value and, in the case shown, results in an ultimate load factor capability of 3.75 on a linear basis. The airplane designed with ACS is represented by the dashed line which intersects the solid line at a load factor of 1.0. As can be seen, the slope of the line is reduced, such that the load at limit load factor is 30 percent less than for the airplane without ACS. This lesser value, increased by the 1.5 factor of safety, becomes the design ultimate load for the airplane with ACS. Above limit load, the slope remains constant until the authority limit of the system is reached at a load factor corresponding to 20° of surface. At this point, the slope of the load versus load factor line becomes equal to that of the airplane without ACS. The result illustrated here, showing approximately equivalent margins of safety, is typical of the design loads of the L-1011. As indicated in Ref. 6, however, the results may be configuration dependent, and should be evaluated for the particular case of interest.

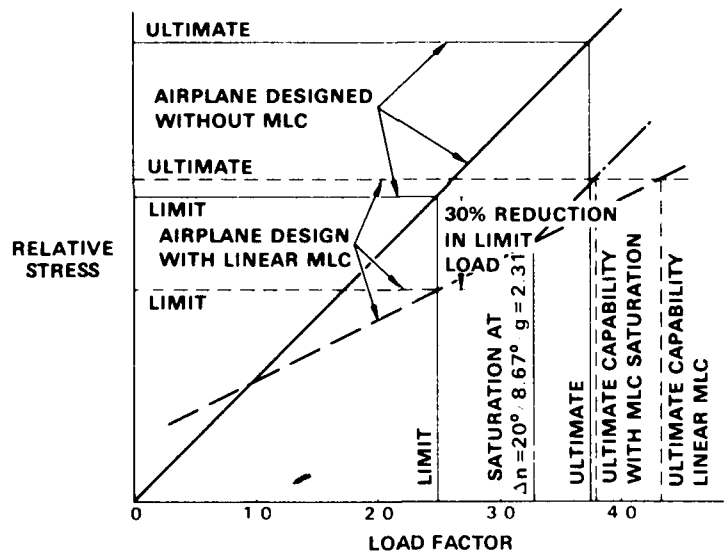


Figure 4. Typical Effect Of MLC Saturation On Ultimate Maneuver Load Capability

The effect of the limitation of control surface rate, which primarily influences gust loads at the airplane elastic mode frequencies, is much more difficult to determine. A nonlinear analysis must be performed to determine this effect, and the loads derived from the linear analysis increased to compensate for it.

SYSTEM DESCRIPTION

General

During the early research investigations of the active control system, the use of each of the existing control surfaces of the L-1011 was considered as a candidate for wing load alleviation. As might be expected, the inboard ailerons were soon eliminated as candidates due to the relative ineffectiveness of these surfaces in influencing wing loads. The outboard ailerons and the all-movable horizontal stabilizer were selected for further evaluation. Using these surfaces, maneuver load control (MLC), elastic mode suppression (EMS), and gust load alleviation (GLA) functions were investigated in depth. Analytical investigations indicated the MLC and EMS functions, implemented by means of the outboard ailerons, to be very effective in reducing wing loads. The GLA function utilized the horizontal stabilizer to reduce wing loads resulting from the response to turbulence of the airplane in the short period mode; analysis indicated this function to be only marginally effective. In this phase of the investigation, it was anticipated

that the use of the stabilizer would be required to offset the pitching moment introduced by the outboard ailerons as a result of the MLC function. Since this would require an active stabilizer in any event, the retention of the GLA function could be justified. A breadboard active control system incorporating these three functions was designed, fabricated, and tested in the laboratory. At this point, Lockheed obtained the support of the NASA Aircraft Energy Efficiency program in the form of a research contract to perform the flight test evaluation of the breadboard system (Ref. 3). During this same period, it was anticipated that the wing span extension of the L-1011 might reduce flutter margins of the airplane to an unacceptable level. As a result of this, investigations were also conducted to determine the feasibility of employing active controls for flutter margin augmentation (FMA). These investigations, detailed in Ref. 7, included the design, fabrication, and flight testing of three candidate systems. Two of these systems made use of the outboard ailerons, with the third system being implemented through the use of the horizontal stabilizer. The FMA system block diagram is shown in Fig. 5. As detailed in Ref. 7, the candidate system which produced motions of the outboard ailerons as a function of wing tip accelerations proved to be the most effective in flight test. When flight test results with the extended span configuration were available late in 1978, however, it was determined that an FMA function was not required. At the same time, assessment of the handling qualities of this configuration indicated that the effects of the pitching moment introduced by the MLC were nearly offset by the increased stability of the extended span. Since pitch compensation through the active stabilizer was therefore no longer a requirement, retention of the marginal GLA function could not be justified.

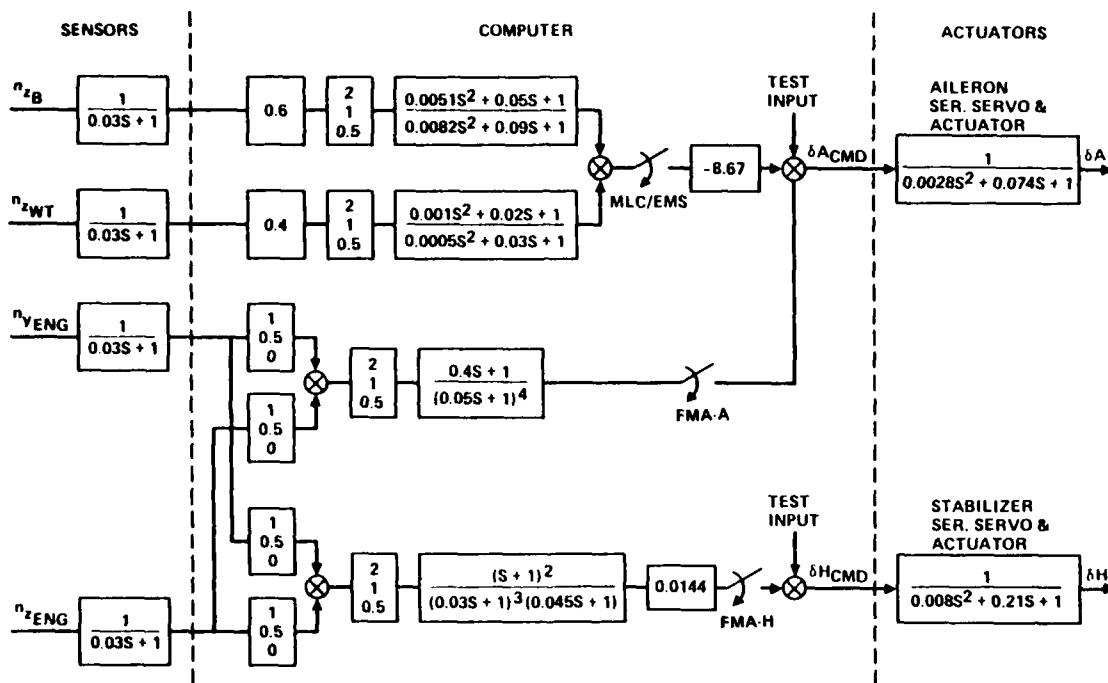


Figure 5. FMA Analog System Block Diagram

Production ACS

The resulting production configuration of the ACS incorporates the MLC and EMS functions only. The location of the principal system components is shown in Fig. 6 and the functional block diagram is given in Fig. 7. From these illustrations, it can be seen that signals are generated by vertical accelerometers in each wing tip and the fuselage and are input to the computers. The computers perform the control law computations and other prescribed functions and output voltage commands to the outboard aileron series servos, which in turn superimpose symmetric aileron inputs on the roll control inputs from the inboard ailerons. The gain scheduling indicated in Fig. 7 utilizes signals from the speed sensors shown in Fig. 6 and from switches indicating the position of the flaps.

Control Law and Computer

The relationship of the sensor input signals to the series servo voltage commands is determined by the control law, or filter, programmed in the computer. This relationship must be such as to provide the required aileron motions in response to acceleration signals, considering the characteristics of the sensors, series servos and power servos. The aileron motions required for the MLC and EMS functions are quite readily determined: for a quasi-steady 2.5g symmetric maneuver, an aileron trailing edge up deflection of 15 degrees with minimum phase lag is required, and for the 1.5 to 1.8 hertz region of the first wing bending mode an additional 90 degrees of phase lag and

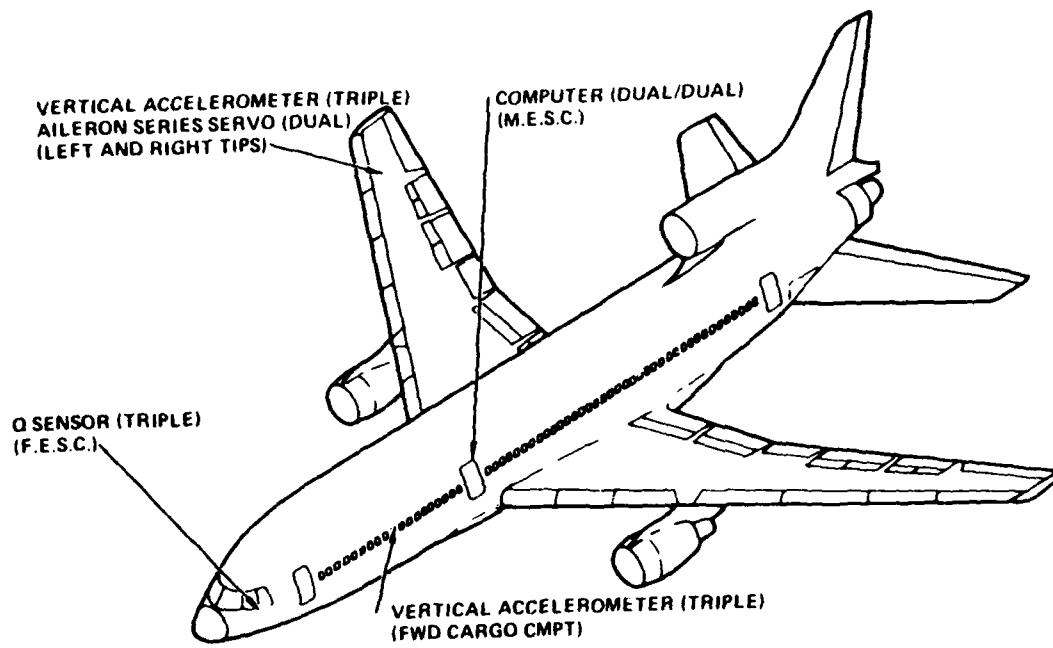


Figure 6. Location of Principal ACS Components

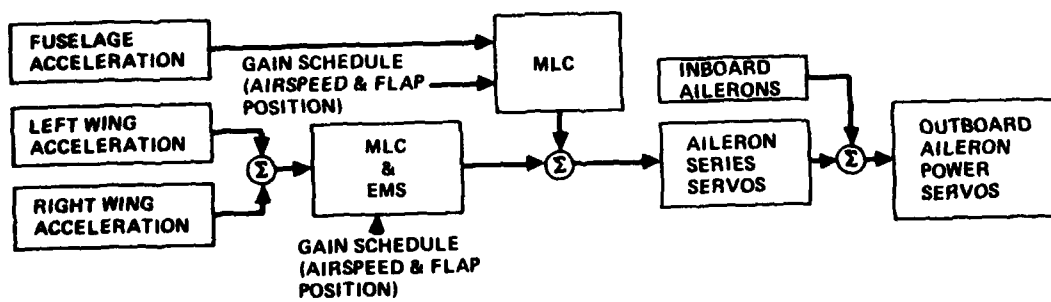


Figure 7. ACS Functional Block Diagram

reasonably high gain must be provided. In addition to these characteristics, adequate gain and phase margins must be provided for all the significant modal responses of the airplane. It is this latter requirement which results in a much greater complexity of the control law than would result from the primary functional requirements alone. Since the specific control law characteristics are so highly configuration dependent, they will not be discussed in detail here. It may be of interest to indicate, however, the procedures used to derive these characteristics. For the frequency range of 0-5 hertz, the control law characteristics derived by analysis required little or no modification as a result of the flight test program. This frequency range included first and second wing bending, stabilizer first bending, fuselage first bending and engine-pylon vertical and lateral bending. In the 5 - 10 hertz range, the analysis provided useful guidance in the development of the control law, but significant adjustments were required in order to incorporate flight test results. The control law characteristics above 10 hertz were dictated almost entirely by test results.

The ACS computer is a four channel or dual-dual digital computer utilizing CAMS-6 (Collins Adaptive Processing System) processors. The computer is described in detail in Ref. 5, and therefore the present discussion will be limited to a few of the outstanding features of the system. One of the foremost of these is the facility with which control law changes can be implemented. Considering the extent to which control law changes were dictated by test results in the later phases of the program, it is doubtful that schedules could have been met without this capability. A second important feature is the very extensive system monitoring which is performed by the computers. This monitoring is capable of detecting faults in the sensors, sensor signal channels, series servos and the computational channels, and to reconfigure the system if conditions for continued operation exist. This capability leads to a third important feature of the system, which is that extensive fault isolation and identification is provided. When a fault in the system occurs, the presence of the fault is announced in the flight station, and data identifying the faulty line replaceable unit (LRU) is stored in the computer. Maintenance personnel can later interrogate the ACS computer, which then displays the identification of the faulty LRUs.

System Availability

The system in-flight availability requirements discussed earlier are met as exceeded by the architecture indicated in Fig. 6 and 7. The sensor sets are triply redundant, with any two sensors of a given set required for operation. The computers are dual, with each computer having two identical channels. Dual series servos are provided for each aileron, with one servo for each aileron being required for operation. This level of redundancy results in a probability of failure of the basic system (with no faults present) of well below 10^{-5} per flight hour. With a first fault present, the probability of system failure ranges from a value slightly greater than 10^{-5} per flight hour to a value slightly less than 10^{-3} per flight hour, depending on the particular fault. As can be seen, the structural design requirement of 99.9 percent in-flight availability will be easily exceeded for even extended operations with a first fault present.

MANEUVER LOADS

Results of the laboratory, ground and flight tests of the ACS are presented and discussed in detail in Ref. 3; selected elements of the flight test results are presented here to illustrate the extent of these tests.

Maneuver loads data were obtained by performing wind-up turns and roller coaster maneuvers with system on and system off, and determining various load parameters as a function of vertical load factor. Shown in Fig. 8 are the shear, bending moment and torsion at an outboard wing station obtained from roller coaster maneuvers at 379 ftAS. Also shown are the analytically predicted increments at a load factor of 1.6. Note that whereas the slope of bending moment and shear versus load factor are reduced by the ACS, the slope of torsion versus load factor is increased. This latter result was adequately predicted by analysis, and required a modest increase in strength of the outer wing spar webs. Another measure of the maneuver loads reduction achievable by the ACS is given by the spanwise distribution of bending moment due to outboard aileron deflection shown in Fig. 9. The test data were obtained by measuring load quantities at several spanwise stations in level, trimmed flight for a range of aileron deflections. Data for three airspeeds are presented and compared with analytical predictions.

A series of tests which proved to be extremely useful in validating the dynamic characteristics of the ACS, as well as those of the mathematical model of the airplane, measured various load and motion parameters in response to control surface oscillatory inputs. The open-loop response data, samples of which are shown in Figs. 10 and 11, are compared with analytical results and are used to substantiate the validity of the mathematical models. Open and closed loop response data, such as that shown in Fig. 12 along with the analytical predictions, are used to validate both the mathematical models and the ACS performance in the elastic mode region.

In an attempt to obtain a direct measure of the ACS performance in the reduction of gust loads, flight test data were obtained for the airplane in turbulence, both system on and system off. The airplane was equipped with a gust boom, enabling the measurement of gust velocity at the airplane centerline. Turbulence response time histories were obtained for a large number of parameters of interest, and these data

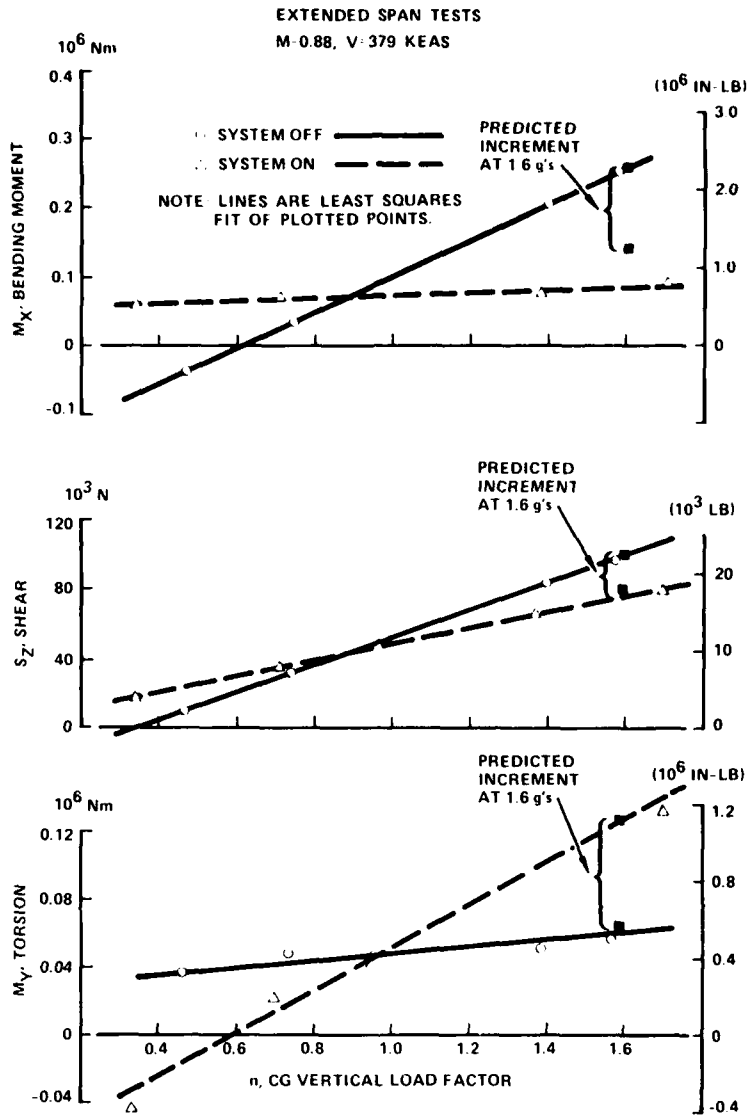


Figure 8. $\eta = 0.71$ Bending Moment, Shear and Torsion vs. Load Factor

were processed to obtain power spectral density (PSD) plots and values of the response parameter \bar{A} . A complete description of the test results and analysis procedures is presented in Ref. 3, as well as a comprehensive discussion of the results. All that will be attempted here is to indicate the types of data and results which were obtained. Shown in Fig. 13 is a PSD plot of the measured gust velocity for one burst of turbulence, compared with theoretical distributions. A PSD plot of wing bending moment at an inboard wing station is shown in Fig. 14, and PSD plots of wing bending moment normalized to gust input are given in Fig. 15 and 16, for system on and system off. On these latter plots, PSD's obtained from a recently developed three dimensional gust analysis procedure are included. Comparisons of ACS load reductions obtained from theory and test data are presented in Fig. 17 and 18. On these summary plots, the dashed line represents the locus of equal test-theory load reductions.

Certification Criteria

The philosophy of equivalent safety, discussed earlier, provides an entirely adequate basis for certification of active controls. This approach interrelates system-on design loads, system-off design loads and system reliability in such a way that, as the load alleviation function becomes increasingly more flight critical, an increasing level of system reliability is required. This is illustrated in Fig. 19, where system-off design load factor is shown as a function of average system unavailability, when system-on design load factor is held constant at 2.53. All points along the curve represent designs of equal safety. One difficulty with this approach, in terms of substantiating the safety of a particular design to the regulatory agencies, lies in the factors which determine average system unavailability. This parameter is dependent on the length of time the ACS is permitted to remain in operation with an initial fault, which is in turn a function of

EXTENDED SPAN TESTS

1g TRIMMED FLIGHT
M = 0.80

V KEAS	PREDICTED	MEASURED
320	---	○
360	---	△
400	---	○

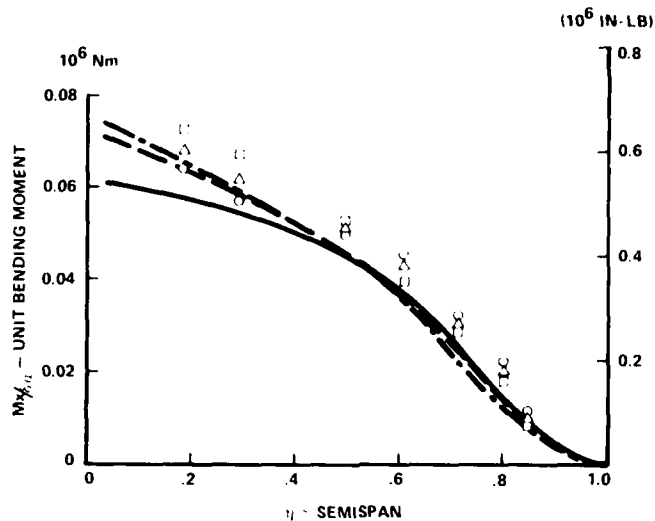


Figure 9. Unit Outboard Aileron Bending Moment

the maintenance practices of individual airlines. Although this variability can be compensated for by the use of very conservative assumptions in deriving the availability parameter, regulatory agencies are reluctant to incorporate these assumptions as part of the certification basis. In response to these concerns, Lockheed and McDonnell-Douglas have separately proposed alternate criteria based on probability of system failure. A composite of these proposals is shown in Fig. 20, which defines system-off design ultimate loads, with and without fail-safe structural damage, as a function of probability of system failure. These criteria are somewhat arbitrary, and considerably exceed the equivalent safety criteria represented by Fig. 19. They do, however, have the advantage of being based on the probability of failure of any particular system configuration for which certification is requested; this parameter can be controlled and substantiated in the design process. In any event, it is important that such criteria be expressed as continuous functions of failure probability, so that improved systems may be accommodated by the criteria as they evolve.

With the above discussion in mind, it should be noted that there is a tendency to prescribe a design floor for system-off capability. This procedure effectively limits the peak risk incurred when the system is inoperative, and it is clear that the values proposed for this minimum capability present no undue constraint on the design of today's active control systems. The procedure will just as effectively inhibit the development of future systems, however, unless the design floor is in turn a function of system reliability - resulting in a continuous function such as that expressed by Fig. 20.

Conclusion

The active control system for load alleviation described in this paper achieves all of the design objectives established for it while utilizing state-of-the-art systems technology. The requirements imposed on the system are realistic ones which can readily be met in the airline operations environment; no unusual or time-consuming maintenance practices are required. The design criteria imposed on the system are such as to assure that the level of safety will not be reduced relative to that of conventional design. In all respects, then, the active control system for load alleviation has achieved a state of readiness for introduction into commercial service.

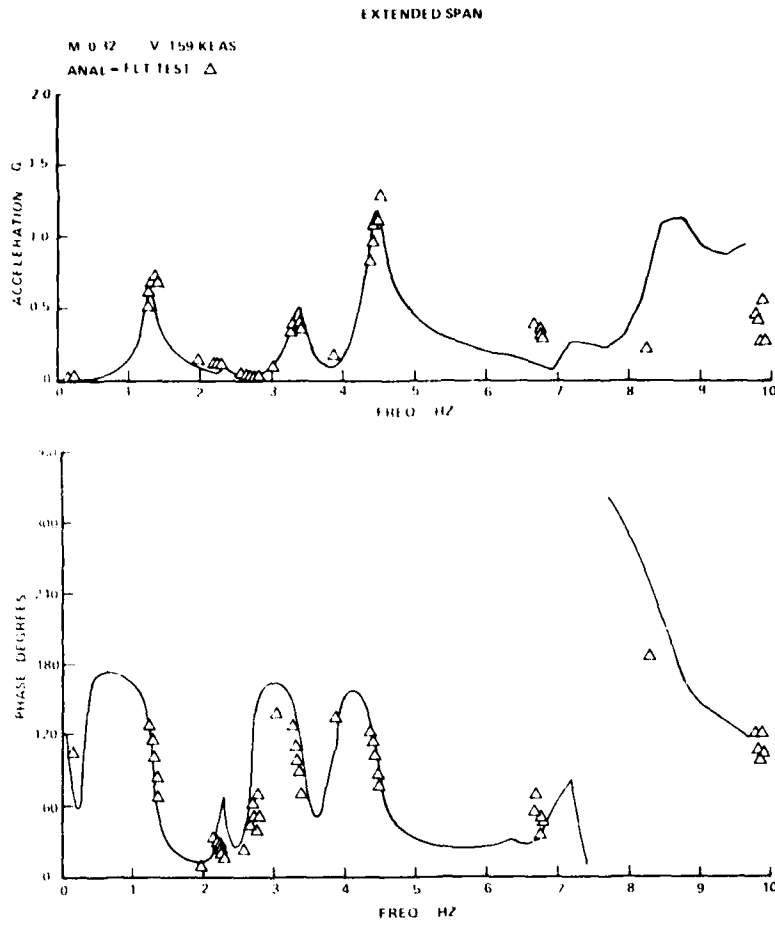


Figure 10. Wing Tip Normal Acceleration/Degree Aileron Open Loop

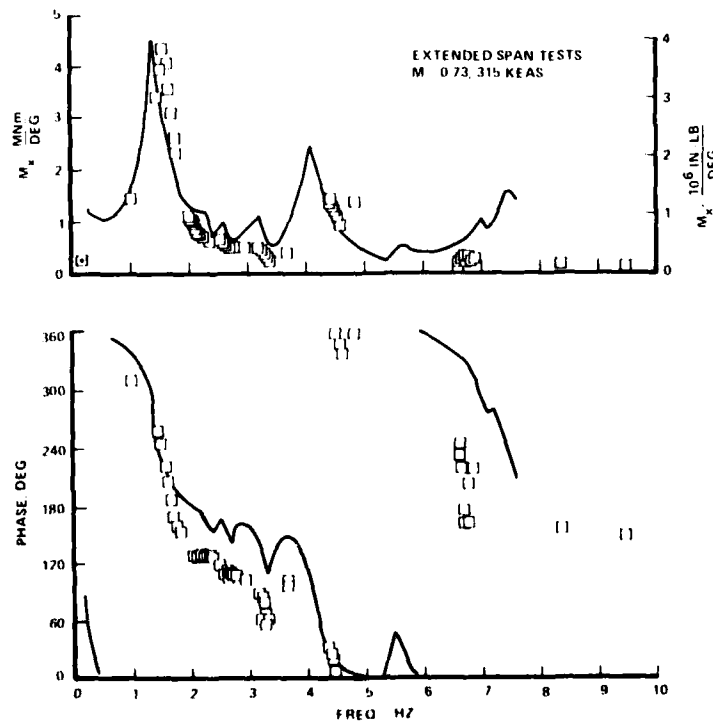


Figure 11. Test/Analysis, Bending at $\eta = 0.19$, Aileron Drive, Open Loop

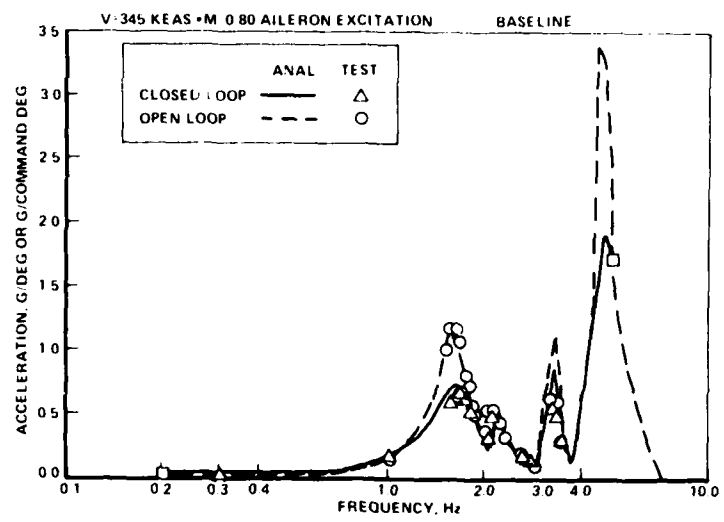


Figure 12. Wing Tip Normal Acceleration Per Degree Aileron, ACS On and Off

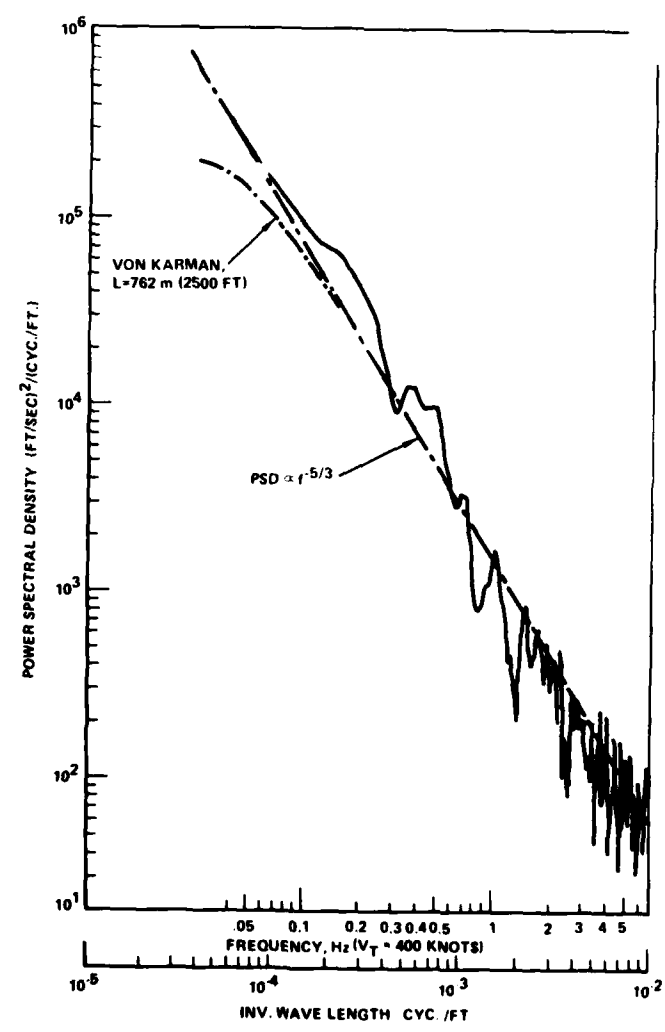


Figure 13. Gust Velocity PSD, Burst 3A

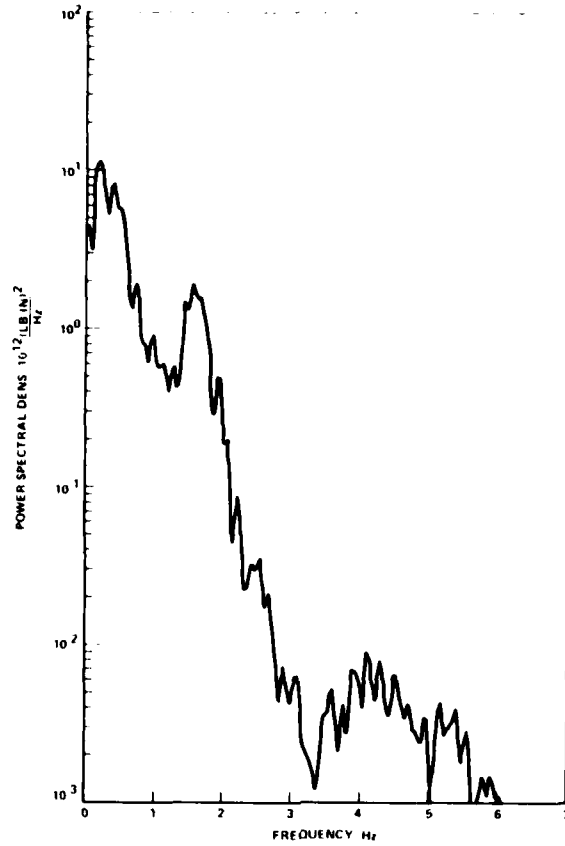


Figure 14. PSD Wing Bending at $\eta = 0.29$, Burst 3A

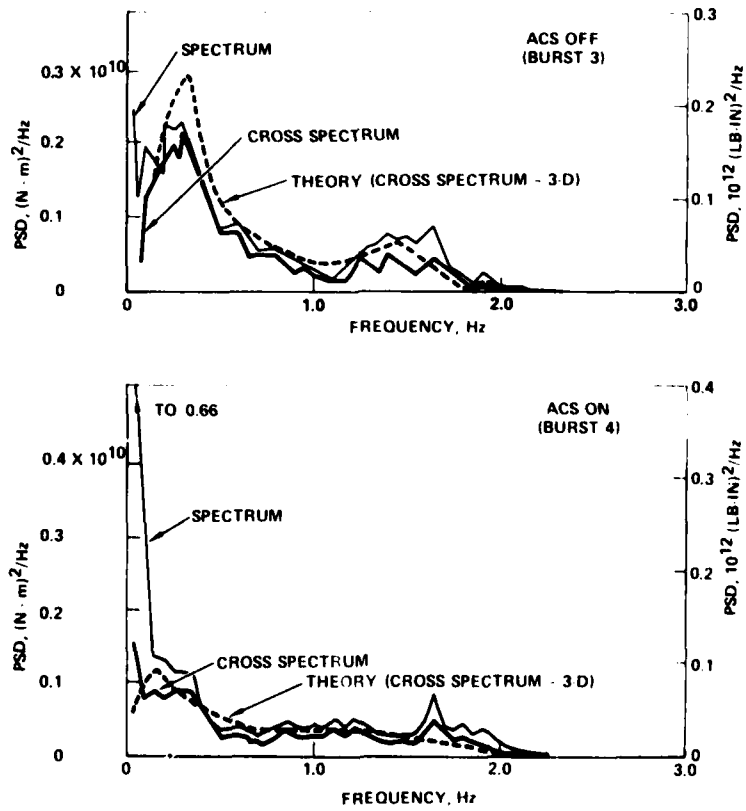


Figure 15. PSD of Wing Bending at $\eta = 0.29$ - Bursts 3, 4

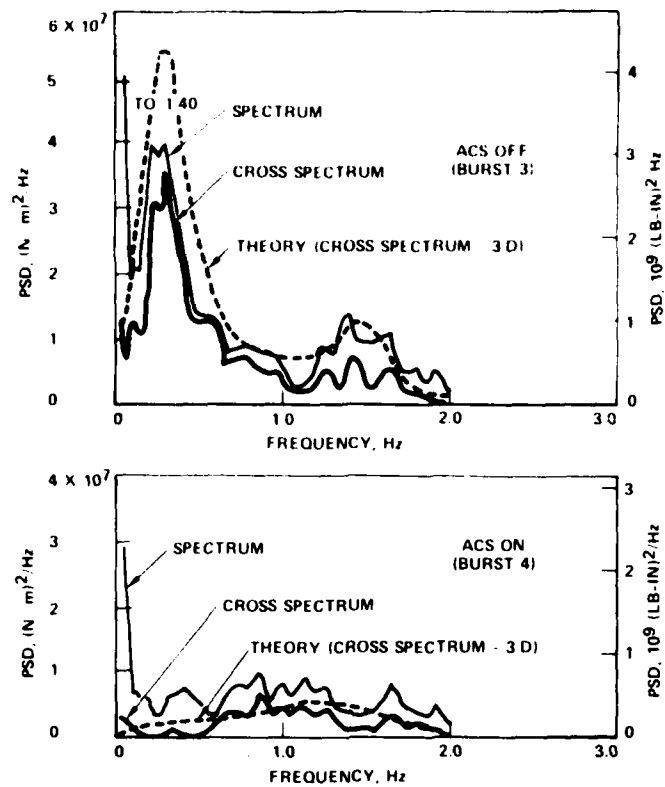


Figure 16. PSD of Wing Bending at $\eta = 0.71$ - Bursts 3, 4

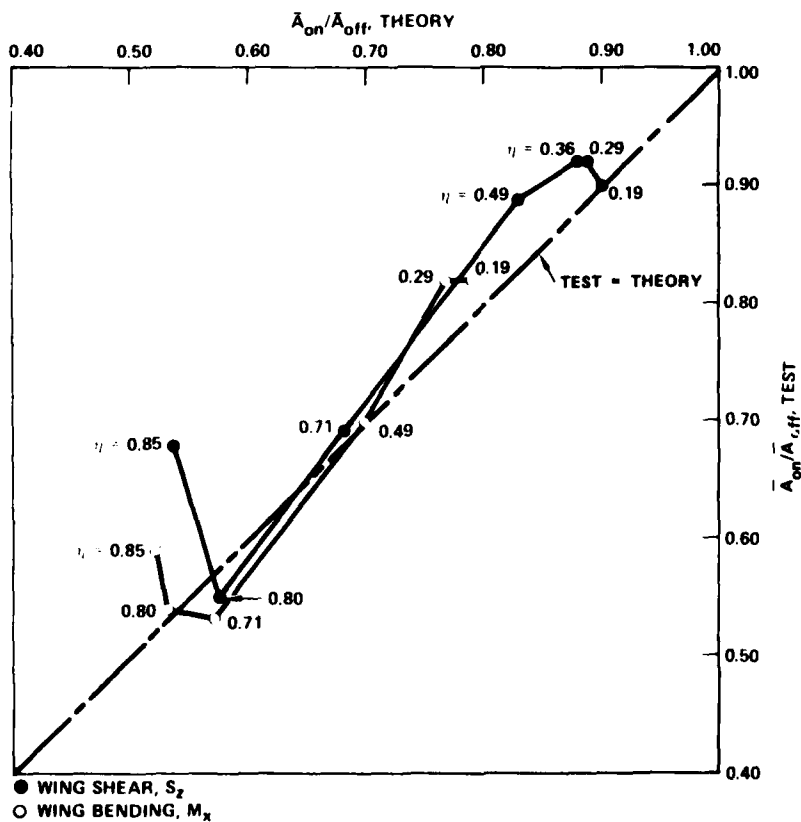


Figure 17. Load Reduction Due to Active Controls - Cross Spectrum Method, 1-D Theory - Bursts 3 and 4

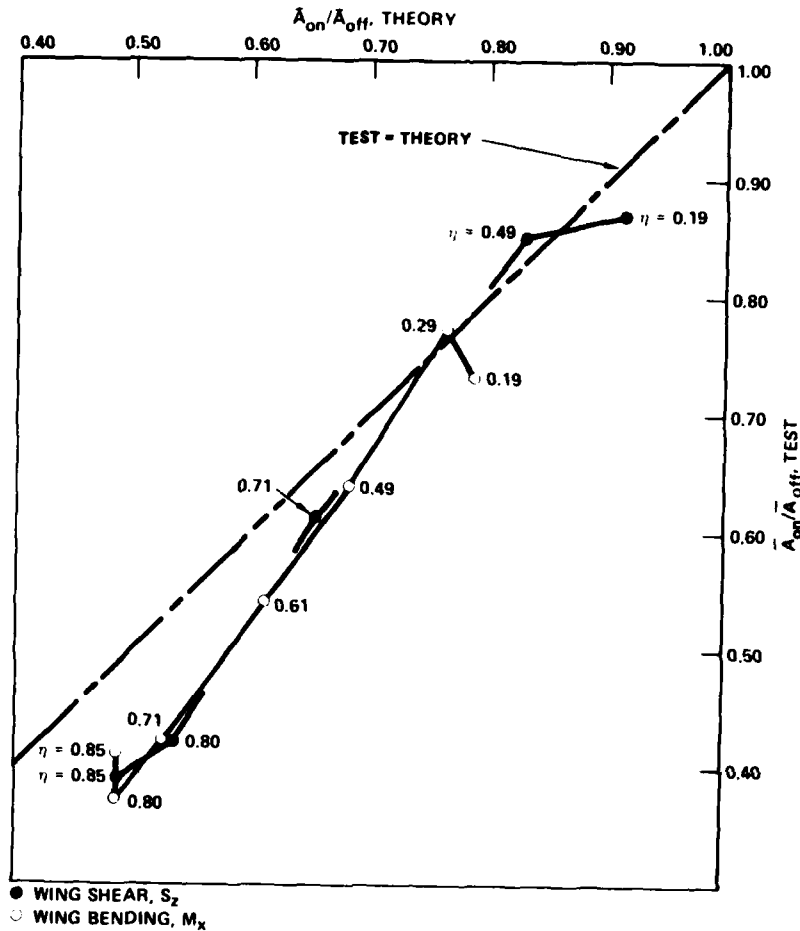


Figure 18. Load Reduction Due to Active Controls - Cross Spectrum Method, 1-D Theory - Bursts 5 and 6.

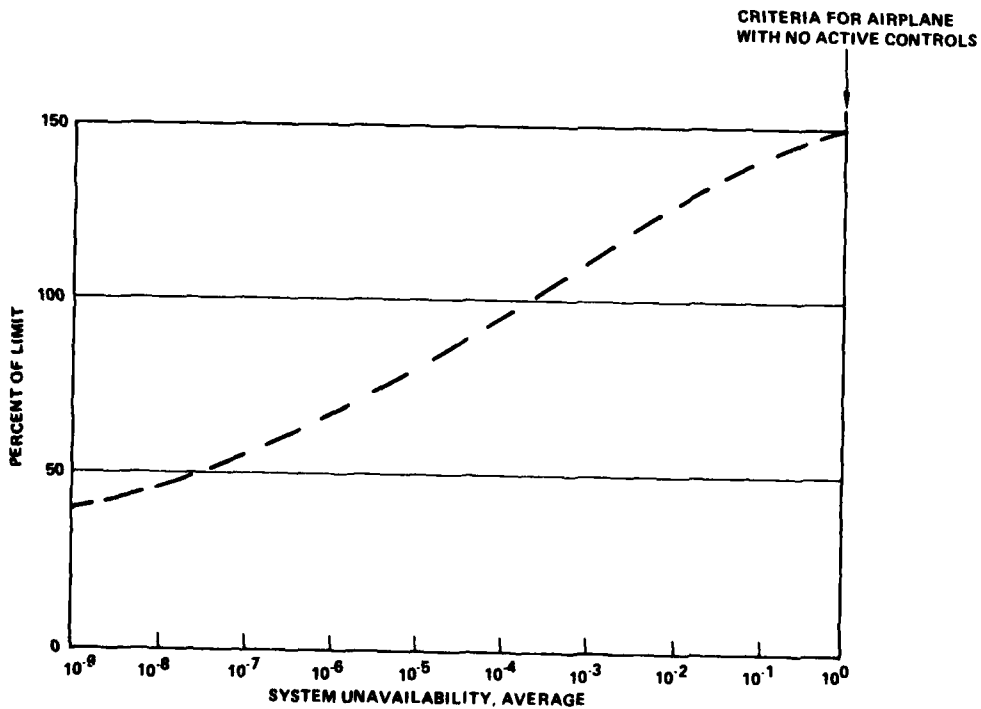


Figure 19. Design Ultimate Loads for Failed Active Control System, Equivalent Safety

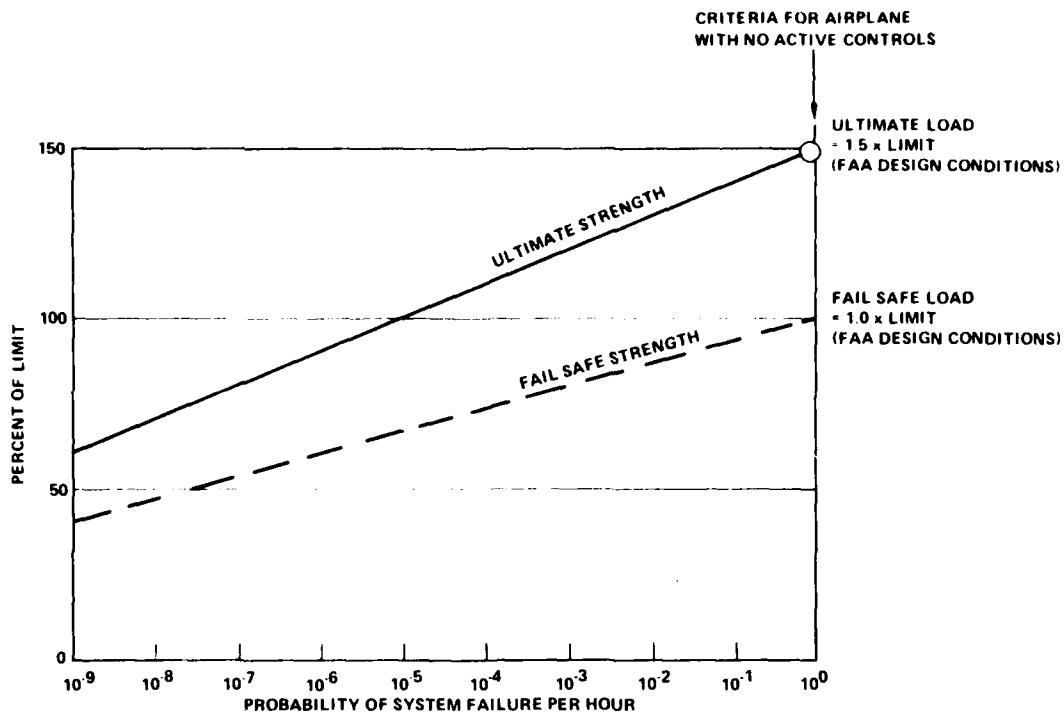


Figure 20. Design Ultimate Loads for Failed Active Control System, Proposed Criteria

REFERENCES

1. Foss, R. L. and Lewolt, J.: Use of Active Controls for Fuel Conservation of Commercial Transports. AIAA Paper No. 77-1220, August 1977.
2. Stauffer, W. A., Foss, R. L., and Lewolt, J. G.: Fuel Conservative Subsonic Transport. AGARDograph AGARD-AG-234, November 1978.
3. Johnston, J. F.: Accelerated Development and Flight Evaluation of Active Control Concepts for Subsonic Transports, Vol. I - Load Alleviation/Extended Span Development and Flight Tests. NASA CR-159097, to be published.
4. Murray, N. D., Hopkins, A. L., and Wensley, J. H.: Highly Reliable Multiprocessors, AGARDograph AGARD-AG-224, May 1977.
5. Hoblit, F. M., Paul, N., Shelton, J. D., and Ashford, F. E.: Development of a Power-Spectral Gust Design Procedure for Civil Aircraft. FAA-ADS-53, January 1966.
6. Ramsey, H. D. and Lewolt, J. G.: Design Maneuver Loads for an Airplane with an Active Control System. AIAA Paper No. 79-0738, April 1979.
7. O'Connell, R. F. and Messina, A. F.: Design, Development and Testing of an Active Flutter Margin Augmentation System for a Commercial Transport Airplane. AIAA Paper No. 79-0790, April 1979.
8. Bendixen, G. E., O'Connell, R. F., and Siegert, C. D.: Digital Active Control System for Load Alleviation for the Lockheed L-1011. AIAA Paper No. 79-1705, August 1979.

ACKNOWLEDGEMENT

The support of the NASA Aircraft Energy Efficiency Program, in the form of Contract NAS 1-14690 for the development and flight evaluation of active controls concepts, was invaluable in the active controls research activities which preceded the development of the present system. This support was instrumental in the eventual decision to introduce active controls into commercial service at an early date.

REPORT DOCUMENTATION PAGE

1. Recipient's Reference	2. Originator's Reference	3. Further Reference	4. Security Classification of Document
	AGARD-R-683	ISBN 92-835-1348-7	UNCLASSIFIED
5. Originator	Advisory Group for Aerospace Research and Development North Atlantic Treaty Organization 7 rue Ancelle, 92200 Neuilly sur Seine, France		
6. Title	DESIGN, DEVELOPMENT AND IMPLEMENTATION OF AN ACTIVE CONTROL SYSTEM FOR LOAD ALLEVIATION FOR A COMMERCIAL TRANSPORT AIRPLANE		
7. Presented at	the 49th Structures and Materials Panel Meeting, Porz-Wahn, Germany, October 1979.		
8. Author(s)/Editor(s)		9. Date	
	R.F.O'Connell	February 1980	
10. Author's/Editor's Address		11. Pages	
	Division Engineer, Aeromechanics Division Lockheed-California Company Burbank, CA 91520, USA	20	
12. Distribution Statement	This document is distributed in accordance with AGARD policies and regulations, which are outlined on the Outside Back Covers of all AGARD publications.		
13. Keywords/Descriptors			
	Active control Flight control Design criteria	Transport aircraft Flight manoeuvres Aerodynamic loads	

14. Abstract

The first application of the concept of manoeuvre load reduction to a large civil aircraft, is the system developed by Lockheed for the L-1011. In particular, certification problems had to be addressed, with the many new aspects introduced by the active control technology. The report should help the understanding of the possibilities and the difficulties that appear in dealing with large practical applications.

<p>AGARD Report No.683 Advisory Group for Aerospace Research and Development, NATO DESIGN, DEVELOPMENT AND IMPLEMENTATION OF AN ACTIVE CONTROL SYSTEM FOR LOAD ALLEVIATION FOR A COMMERCIAL TRANSPORT AIRPLANE by R.F.O'Connell Published February 1980 20 pages</p> <p>The first application of the concept of manoeuvre load reduction to a large civil aircraft, is the system developed by Lockheed for the L-1011. In particular, certification problems had to be addressed, with the many new aspects introduced by the active control</p> <p>P.T.O.</p>	<p>AGARD-R-683</p> <p>Active control Flight control Design criteria Transport aircraft Flight manoeuvres Aerodynamic loads</p>	<p>AGARD Report No.683 Advisory Group for Aerospace Research and Development, NATO DESIGN, DEVELOPMENT AND IMPLEMENTATION OF AN ACTIVE CONTROL SYSTEM FOR LOAD ALLEVIATION FOR A COMMERCIAL TRANSPORT AIRPLANE by R.F.O'Connell Published February 1980 20 pages</p> <p>The first application of the concept of manoeuvre load reduction to a large civil aircraft, is the system developed by Lockheed for the L-1011. In particular, certification problems had to be addressed, with the many new aspects introduced by the active control</p> <p>P.T.O.</p>	<p>AGARD-R-683</p> <p>Active control Flight control Design criteria Transport aircraft Flight manoeuvres Aerodynamic loads</p>
<p>AGARD Report No.683 Advisory Group for Aerospace Research and Development, NATO DESIGN, DEVELOPMENT AND IMPLEMENTATION OF AN ACTIVE CONTROL SYSTEM FOR LOAD ALLEVIATION FOR A COMMERCIAL TRANSPORT AIRPLANE by R.F.O'Connell Published February 1980 20 pages</p> <p>The first application of the concept of manoeuvre load reduction to a large civil aircraft, is the system developed by Lockheed for the L-1011. In particular, certification problems had to be addressed, with the many new aspects introduced by the active control</p> <p>P.T.O.</p>	<p>AGARD-R-683</p> <p>Active control Flight control Design criteria Transport aircraft Aerodynamic loads</p>	<p>AGARD Report No.683 Advisory Group for Aerospace Research and Development, NATO DESIGN, DEVELOPMENT AND IMPLEMENTATION OF AN ACTIVE CONTROL SYSTEM FOR LOAD ALLEVIATION FOR A COMMERCIAL TRANSPORT AIRPLANE by R.F.O'Connell Published February 1980 20 pages</p> <p>The first application of the concept of manoeuvre load reduction to a large civil aircraft, is the system developed by Lockheed for the L-1011. In particular, certification problems had to be addressed, with the many new aspects introduced by the active control</p> <p>P.T.O.</p>	<p>AGARD-R-683</p> <p>Active control Flight control Design criteria Transport aircraft Aerodynamic loads</p>

<p>technology. The report should help the understanding of the possibilities and the difficulties that appear in dealing with large practical applications.</p> <p>Paper presented at the 49th Structures and Materials Panel Meeting, Porz-Wahn, Germany, October 1979.</p> <p>ISBN 92-835-1348-7</p>	<p>technology. The report should help the understanding of the possibilities and the difficulties that appear in dealing with large practical applications.</p> <p>Paper presented at the 49th Structures and Materials Panel Meeting, Porz-Wahn, Germany, October 1979.</p> <p>ISBN 92-835-1348-7</p>
<p>technology. The report should help the understanding of the possibilities and the difficulties that appear in dealing with large practical applications.</p> <p>Paper presented at the 49th Structures and Materials Panel Meeting, Porz-Wahn, Germany, October 1979.</p> <p>ISBN 92-835-1348-7</p>	<p>technology. The report should help the understanding of the possibilities and the difficulties that appear in dealing with large practical applications.</p> <p>Paper presented at the 49th Structures and Materials Panel Meeting, Porz-Wahn, Germany, October 1979.</p> <p>ISBN 92-835-1348-7</p>

B203
4

AGARD

NATO  OTAN

7 RUE ANCELLE · 92200 NEUILLY-SUR-SEINE
FRANCE

Telephone 745.08.10 · Telex 610176

**DISTRIBUTION OF UNCLASSIFIED
AGARD PUBLICATIONS**

AGARD does NOT hold stocks of AGARD publications at the above address for general distribution. Initial distribution of AGARD publications is made to AGARD Member Nations through the following National Distribution Centres. Further copies are sometimes available from these Centres, but if not may be purchased in Microfiche or Photocopy form from the Purchase Agencies listed below.

NATIONAL DISTRIBUTION CENTRES

BELGIUM

Coordonnateur AGARD VSL
Etat-Major de la Force Aérienne
Quartier Reine Elisabeth
Rue d'Evere, 1140 Bruxelles

CANADA

Defence Science Information Services
Department of National Defence
Ottawa, Ontario K1A 0K2

DENMARK

Danish Defence Research Board
Østerbrogades Kaserne
Copenhagen Ø

FRANCE

O.N.E.R.A. (Direction)
29 Avenue de la Division Leclerc
92320 Châtillon sous Bagneux

GERMANY

Zentralstelle für Luft- und Raumfahrt-
dokumentation und -information
c/o Fachinformationszentrum Energie,
Physik, Mathematik GmbH
Kernforschungszentrum
7514 Eggenstein-Leopoldshafen 2

GREECE

Hellenic Air Force General Staff
Research and Development Directorate
Holargos, Athens

ICELAND

Director of Aviation
c/o Flugrad
Reykjavik

ITALY

Aeronautica Militare
Ufficio del Delegato Nazionale all'AGARD
3, Piazzale Adenauer
Roma/EUR

LUXEMBOURG

See Belgium

NETHERLANDS

Netherlands Delegation to AGARD
National Aerospace Laboratory, NLR
P.O. Box 126
2600 A.C. Delft

NORWAY

Norwegian Defence Research Establishment
Main Library
P.O. Box 25
N-2007 Kjeller

PORTUGAL

Direcção do Serviço de Material
da Força Aerea
Rua da Escola Politécnica 42
Lisboa
Attn: AGARD National Delegate

TURKEY

Department of Research and Development (ARGE)
Ministry of National Defence, Ankara

UNITED KINGDOM

Defence Research Information Centre
Station Square House
St. Mary Cray
Orpington, Kent BR5 3RF

UNITED STATES

National Aeronautics and Space Administration (NASA)
Langley Field, Virginia 23365
Attn: Report Distribution and Storage Unit

THE UNITED STATES NATIONAL DISTRIBUTION CENTRE (NASA) DOES NOT HOLD STOCKS OF AGARD PUBLICATIONS, AND APPLICATIONS FOR COPIES SHOULD BE MADE DIRECT TO THE NATIONAL TECHNICAL INFORMATION SERVICE (NTIS) AT THE ADDRESS BELOW.

PURCHASE AGENCIES

Microfiche or Photocopy

National Technical
Information Service (NTIS)
5285 Port Royal Road
Springfield
Virginia 22161, USA

Microfiche

Space Documentation Service
European Space Agency
10, rue Mario Nikis
75015 Paris, France

Microfiche

Technology Reports
Centre (DTI)
Station Square House
St. Mary Cray
Orpington, Kent BR5 3RF
England

Requests for microfiche or photocopies of AGARD documents should include the AGARD serial number, title, author or editor, and publication date. Requests to NTIS should include the NASA accession report number. Full bibliographical references and abstracts of AGARD publications are given in the following journals:

Scientific and Technical Aerospace Reports (STAR)
published by NASA Scientific and Technical
Information Facility
Post Office Box 8757
Baltimore/Washington International Airport
Maryland 21240, USA

Government Reports Announcements (GRA)
published by the National Technical
Information Services, Springfield
Virginia 22161, USA



Printed by Technical Editing and Reproduction Ltd
Harford House, 7-9 Charlotte St, London W1P 1HD

ISBN 92-835-1348-7