

TECHNICAL LIBRARY

AD

TECHNICAL REPORT ARLCB-TR-79034

IMPLEMENTATION OF A TRAPEZOIDAL RING ELEMENT IN NASTRAN FOR ELASTIC-PLASTIC ANALYSIS

P. Chen
P. O'Hara

December 1979



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER WEAPON SYSTEMS LABORATORY
BENET WEAPONS LABORATORY
WATERVLIET, N. Y. 12189

AMCMS No. 6111.01.91A0.0

DA Project No. 1L161101A91A

PRON No. 1A-9-2ZA01-Y

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

DTIC QUALITY INSPECTED 8

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.


The use of trade name(s) and/or manufacturer(s) does not constitute an official indorsement or approval.

DISPOSITION

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARLCB-TR-79034	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) IMPLEMENTATION OF A TRAPEZOIDAL RING ELEMENT IN NASTRAN FOR ELASTIC-PLASTIC ANALYSIS		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) P. Chen P. O'Hara		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Benet Weapons Laboratory Watervliet Arsenal, Watervliet, NY 12189 DRDAR-LCB-TL		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS No. 6111.01.91A0.0 DA Project No. 1L161101A91A PRON No. 1A-9-2ZA01-Y
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Armament Research and Development Command Large Caliber Weapon Systems Laboratory Dover, New Jersey 07801		12. REPORT DATE December 1979
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 20
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Presented at the 8th NASTRAN Users' Colloquium, Goddard Space Flight Center, Oct 79. To be published in the proceedings of the 8th NASTRAN Users' Colloquium.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Elastic-Plastic Analysis NASTRAN Program Gun Tube Ring Element		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The explicit expressions for an elastic-plastic trapezoidal ring element are presented and implemented in NASTRAN computer program. The material is assumed to obey the von Mises' yield criterion, isotropic hardening rule, and the Prandtl-Reuss flow relations. For the purpose of demonstration, two elastic-plastic problems are solved and compared with previous results. The first is a plane-strain tube under uniform internal pressure and the second a finite-length tube loaded over part of its inner surface. A very good agreement has been found in both test problems.		

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

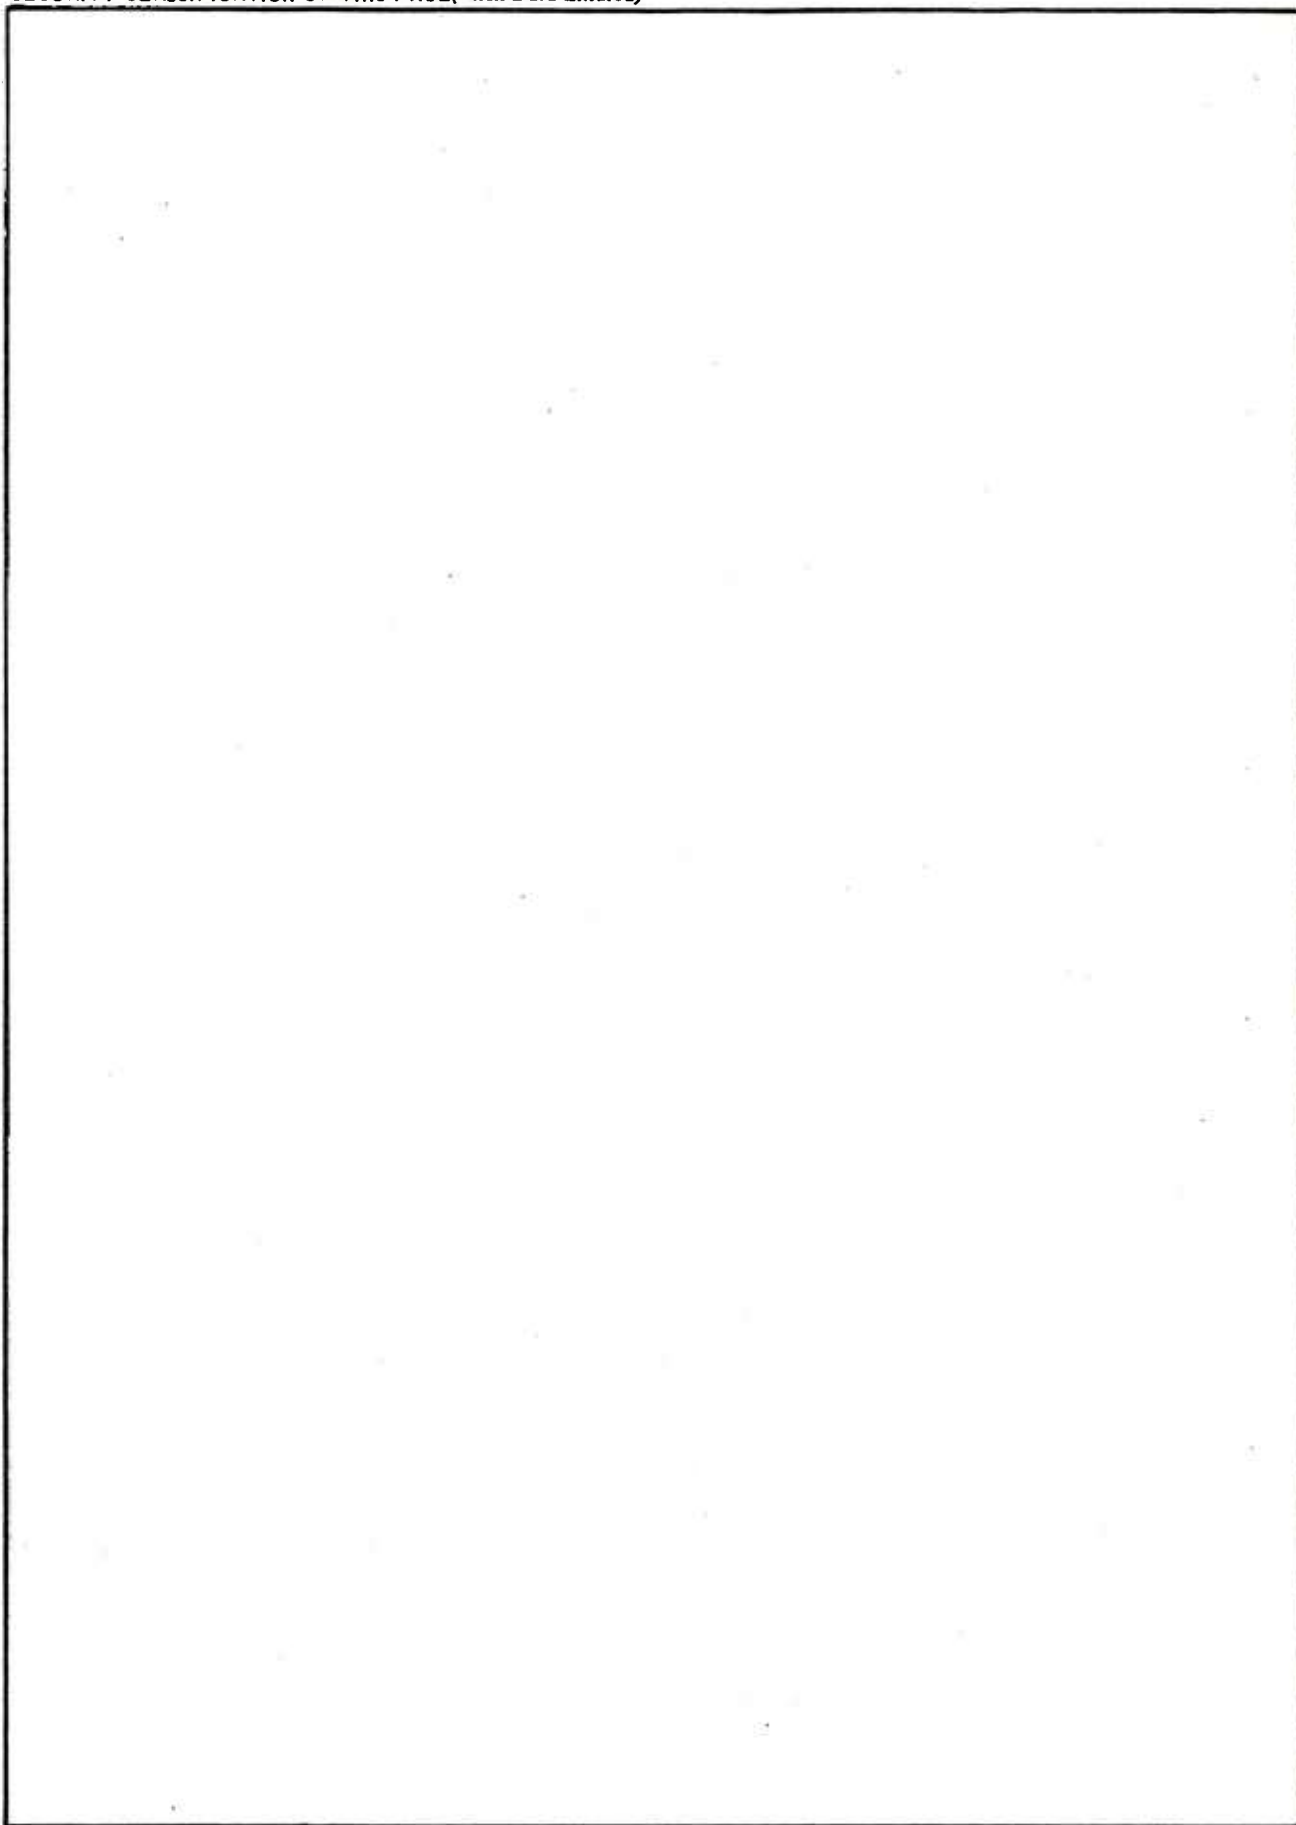

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
CONSTITUTIVE RELATIONS	2
TRAPEZOIDAL RING ELEMENT	5
NASTRAN IMPLEMENTATION	6
NUMERICAL EXAMPLES	8
EXAMPLE 1	8
EXAMPLE 2	9
CONCLUSION	10
REFERENCES	11

ILLUSTRATIONS

1. Radial displacements in a pressurized tube.	12
2. Stresses in a pressurized tube.	13
3. Two-dimensional elastic-plastic tube.	14
4. Radial displacements in a two-dimensional tube.	15
5. Stresses in a two-dimensional tube.	16

INTRODUCTION

In recent years finite element method has been widely used for solving complex nonlinear problems and many large-scale general purpose computer programs have been developed.¹ The MARC and ANSYS systems have found wide applications, yet they are quite expensive. The piecewise linear analysis option of the NASTRAN program provides an algorithm for solving nonlinear problems in material plasticity.² The load is applied in increments such that the stiffness properties can be assumed to be constant over each increment. However, the usefulness of this option is quite limited because only a few elements have been implemented. These include rod, tube, bar elements for one-dimensional problems and plate elements for two-dimensional plane stress problems. This paper describes the implementation of a trapezoidal ring element in NASTRAN for solving elastic-plastic problems of rotational symmetry.

The theoretical basis of our implementation follows the approach first developed by Swedlow.³ A unique relationship between the octahedral strain is assumed to exist. The material is assumed to obey the Mises' yield criterion, isotropic hardening rule and the Prandtl-Reuss flow relations. The explicit expressions for axisymmetric plasticity are derived. The element stiffness matrix and the

¹W. Pilkey, K. Saczalski, and H. Schaeffer, "Structural Mechanics Computer Programs, Surveys, Assessments and Availability," University Press of Virginia, 1974.

²"NASTRAN Theoretical Manual," NASA SP-221 (01), 1972.

³J. L. Swedlow, "The Thickness Effect and Plastic Flow in Cracked Plates," ARL 65-216, Aerospace Research Laboratory, Office of Aerospace Research," October 1965.

stress data recovery routines for the trapezoidal ring element are developed. Seven new subroutines are implemented and added to the NASTRAN code.

For the purpose of demonstration, two elastic-plastic test problems are solved. The first is an infinitely long tube under uniform internal pressure. The NASTRAN results are in excellent agreement with an exact solution based on a finite-difference approach.⁴ The second problem is a thick-walled cylinder of finite length loaded over part of its inner surface. The NASTRAN results are compared with those obtained by a two-dimensional code with the use of quadrilateral ring elements.⁵ A good agreement between the two results has also been achieved.

CONSTITUTIVE RELATIONS

Following the development by Swedlow,³ the constitutive relations to be used in our formulation for solving elastic-plastic problems of rotational symmetry will be presented here. In the development, a unique relationship between the octahedral stress and the plastic octahedral strain is assumed to exist and the use of ideally plastic materials is excluded. The total strain components (ϵ_r , ϵ_θ , ϵ_z , and γ_{rz}) are composed of the elastic, recoverable deformations and the

³J. L. Swedlow, "The Thickness Effect and Plastic Flow in Cracked Plates," ARL 65-216, Aerospace Research Laboratory, Office of Aerospace Research, October 1965.

⁴P. C. T. Chen, "A Finite-Difference Approach to Axisymmetric Plane Strain Problems Beyond the Elastic Limit," To appear in Trans. 25th Conference of Army Mathematicians, 1979.

⁵P. C. T. Chen, "Numerical Solution of Gun Tube Problems in the Elastic-Plastic Range," Proceedings of the 1977 Army Numerical Analysis and Computer Conference, pp. 423-439.

plastic portions (ϵ_r^P , ϵ_θ^P , ϵ_z^P , and γ_{rz}^P). The rates of plastic flow, ($\dot{\epsilon}_r^P$, etc.), are independent of a time scale and are simply used for convenience instead of the incremental values. The definitions of the octahedral stress τ_o and the octahedral plastic strain rate $\dot{\epsilon}_o^P$ in the case of rotational symmetry are

$$\tau_o = (1/3) [(\sigma_r - \sigma_\theta)^2 + (\sigma_\theta - \sigma_z)^2 + (\sigma_z - \sigma_r)^2 + 6\tau_{rz}^2]^{1/2} \quad (1)$$

$$\dot{\epsilon}_o^P = (1/3) [(\dot{\epsilon}_r^P - \dot{\epsilon}_\theta^P)^2 + (\dot{\epsilon}_\theta^P - \dot{\epsilon}_z^P)^2 + (\dot{\epsilon}_z^P - \dot{\epsilon}_r^P)^2 + (3/2)(\dot{\gamma}_{rz}^P)^2]^{1/2} \quad (2)$$

where (σ_r , σ_θ , σ_z , τ_{rz}) are the nonvanishing stress components.

A unique relationship between τ_o and $\dot{\epsilon}_o^P$ is assumed and there exists a function, $M_T(\tau_o)$, such that

$$2M_T(\tau_o) = \dot{\tau}_o / \dot{\epsilon}_o^P. \quad (3)$$

The plastic modulus, $M_T(\tau_o)$, can be related to the slope, E_T , of the effective stress-strain ($\bar{\sigma}$ - $\bar{\epsilon}$) curve by

$$\frac{1}{3M_T(\tau_o)} = \frac{1}{E_T} - \frac{1}{E} \quad (4)$$

where E is the elastic modulus and

$$\begin{aligned} E_t &= \dot{\bar{\sigma}} / \dot{\bar{\epsilon}} \\ \bar{\sigma} &= (3/\sqrt{2})\tau_o \\ \bar{\epsilon} &= \sqrt{2} \epsilon_o + \bar{\sigma}/E. \end{aligned} \quad (5)$$

The material is assumed to obey the Mises' yield criterion and the Prandtl-Reuss flow rule. The matrix relationship for the plastic flow in the case of rotational symmetry is

$$\begin{Bmatrix} \dot{\epsilon}_r \\ \dot{\epsilon}_\theta \\ \dot{\epsilon}_z \\ \dot{\gamma}_{rz} \end{Bmatrix} = [C] \begin{Bmatrix} \dot{\sigma}_r \\ \dot{\sigma}_\theta \\ \dot{\sigma}_z \\ \dot{\tau}_{rz} \end{Bmatrix} \quad (6)$$

$$[C] = \frac{1}{E} \begin{bmatrix} 1 & -\nu & -\nu & 0 \\ -\nu & 1 & -\nu & 0 \\ -\nu & -\nu & 1 & 0 \\ 0 & 0 & 0 & 2(1+\nu) \end{bmatrix} + \frac{1}{6\tau_0^2 M_T(\tau_0)} \begin{bmatrix} S_r^2 & S_r S_\theta & S_r S_z & 2S_r \tau_{rz} \\ & S_\theta^2 & S_\theta S_z & 2S_\theta \tau_{rz} \\ & & S_z^2 & 2S_z \tau_{rz} \\ \text{SYM} & & & 4\tau_{rz}^2 \end{bmatrix} \quad (7)$$

where ν is the Poisson's ratio,

$$\begin{aligned} S_r &= (2\sigma_r - \sigma_\theta - \sigma_z)/3, \\ S_\theta &= (2\sigma_\theta - \sigma_z - \sigma_r)/3, \\ S_z &= (2\sigma_z - \sigma_r - \sigma_\theta)/3. \end{aligned} \quad (8)$$

For strain-hardening materials, M_T (or E_T) $\neq 0$, we can obtain the inverse of $[C]$ numerically and this procedure is chosen in developing NASTRAN program. For ideally-plastic materials, $M_T = E_T = 0$, matrix $[C]$ does not exist and the NASTRAN program fails. However, its inverse $[C]^{-1}$ still exists and the closed form has been derived in

Reference 6. In the axisymmetric case, the explicit form as seen in Reference 7 is:

$$[D] = \frac{2G}{1-2\nu} \begin{bmatrix} 1-\nu & & & \text{SYM} \\ \nu & 1-\nu & & \\ \nu & \nu & 1-\nu & \\ 0 & 0 & 0 & \frac{1}{2}(1-\nu) \end{bmatrix} - \frac{2G}{A} \begin{bmatrix} S_r^2 & & & \text{SYM} \\ S_r S_\theta & S_\theta^2 & & \\ S_r S_z & S_\theta S_z & S_z^2 & \\ S_r \tau_{rz} & S_\theta \tau_{tz} & S_z \tau_{rz} & \tau_{rz}^2 \end{bmatrix} \quad (9)$$

where

$$A = 3\tau_o^2 (1 + M_T/G)$$

and

$$G = \frac{1}{2} E/(1+\nu) . \quad (10)$$

If we want to remove the limitation that the use of ideally-plastic materials is excluded, we have to use Eq. (9) instead of Eq. (7).

TRAPEZOIDAL RING ELEMENT

The incremental displacement field employed for the trapezoidal ring element are

$$\begin{aligned} \Delta u(r,z) &= \beta_1 + \beta_2 r + \beta_3 z + \beta_4 rz , \\ \Delta w(r,z) &= \beta_5 + \beta_6 r + \beta_7 z + \beta_8 rz . \end{aligned} \quad (11)$$

The transformation from grid point coordinates to generalized coordinates is

$$\{\beta\} = [\Gamma_{\beta q}] \{\Delta q\} \quad (12)$$

⁶Y. Yamada, N. Yoshimura, and T. Sakurai, "Plastic Stress-Strain Matrix and Its Application for the Solution of Elastic-Plastic Problems by the Finite Element Method," Int. J. Mech. Sci., Vol. 10, pp. 345-354, 1968.

⁷P. C. T. Chen, "Elastic-Plastic Solution of a Two-Dimensional Tube Problem by the Finite Element," Trans. Nineteenth Conf. of Army Mathematicians, pp. 763-784.

where

$$\begin{aligned}\{\Delta q\}^T &= [\Delta u_1, \Delta w_1, \Delta u_2, \Delta w_2, \Delta u_3, \Delta w_3, \Delta u_4, \Delta w_4] , \\ \{\beta\}^T &= [\beta_1, \beta_2, \beta_3, \beta_4, \beta_5, \beta_6, \beta_7, \beta_8] .\end{aligned}\quad (13)$$

and the elements of the inverse of the transformation matrix $[\Gamma_{\beta q}]^{-1}$ are the coefficients of the β 's in Equations (11), evaluated at the corners of the element.

The stiffness matrix is formed in the same manner as that for the anisotropic elastic element. The final form referred to grid point coordinates is

$$[K] = [\Gamma_{\beta q}]^T [\bar{K}] [\Gamma_{\beta q}] ,$$

where

$$[\bar{K}] = 2\pi \int r [B]^T [D] [B] dz dr . \quad (14)$$

$[D]$, the matrix of material coefficients, is defined by Equation (9).

The $[B]$ matrix is the same as the elastic case, but now it expresses the incremental strains in terms of generalized coordinates

$$\{\Delta \epsilon\} = [B] \{\beta\} . \quad (15)$$

NASTRAN IMPLEMENTATION

The NASTRAN implementation for an elastic-plastic trapezoidal ring element follows the steps outlined in Section 6.8, "Adding a structural element," of Reference 8. Changes were required in the functional modules PLA1, PLA3, and PLA4, which included the writing

⁸"NASTRAN Programmers' Manual," NASA SP-223 (01), 1972.

of several new subroutines. These new routines could easily be modeled after the existing code for the linear portion of the program. There are two major differences in the nonlinear subroutines. First is the new code for the calculation of the material stiffness matrix and second is that thermal stresses and element force calculations are eliminated in the nonlinear code.

The changes in PLA1 allows this module to identify the new element as a member of the piecewise linear element set and properly initialize the nonlinear Element Summary and Element Connection Property Tables. Three element stress recovery subroutines were added to PLA3: PSAPRG, a driver for stress data recovery; PLTRR1 and PSTRR2, phase I and II stress recovery routines. Element stiffness calculations in PLA4 require four new subroutines: PKAPRG, a driver for nonlinear trapezoidal ring elements in PLA4, PKTRR1 and PKTRR2, stress recovery routines which generate stresses for the computation of the nonlinear material matrix; and PKTRAP, the stiffness matrix generation routine for nonlinear trapezoidal ring elements.

The computer system available for this work is IBM 360 Model 44. In order to add the new code into Link 13, it became necessary to add a new branch to the overlay trees to contain the new elements.

NUMERICAL EXAMPLES

For the purpose of demonstration, two elastic-plastic problems of rotational symmetry were solved and compared with other results.^{4,5} The first is an infinitely long tube under uniform internal pressure and the second, a thick-walled cylinder of finite length loaded over part of its inner surface. The material properties for both problems are the same. The elastic constants are $E = 30 \times 10^6$ psi, $\nu = 0.3$ and the effective stress-strain curve is represented by three line segments connecting the four points in the $(\bar{\epsilon}-\bar{\sigma})$ plane, $(\bar{\epsilon}, \bar{\sigma}) = (0.0, 0.0)$, $(0.005, 150,000 \text{ psi})$, $(0.055, 225,000 \text{ psi})$, $(0.1, 225,000 \text{ psi})$.

EXAMPLE 1. Consider an infinitely long tube subjected to uniform internal pressure p . The plane strain condition is assumed. The tube of outside radius 2" and inside radius 1" has been divided into 25 trapezoidal ring elements. The numerical results based on the NASTRAN program have been obtained. For this problem, a new finite-difference approach⁴ can be used to generate exact solution and to assess the accuracy of the NASTRAN code. Some of the results for the displacements and stresses are presented graphically in Figures 1 and 2. Twenty-five load increments are used in NASTRAN as shown in Figure 1. The radial displacements at the inside as well as outside surface are

⁴P. C. T., "A Finite-Difference Approach to Axisymmetric Plane Strain Problems Beyond the Elastic Limit," To appear in Trans. 25th Conference of Army Mathematicians, 1979.

⁵P. C. T. Chen, "Numerical Solution of Gun Tube Problems in the Elastic-Plastic Range," Proceedings of the 1977 Army Numerical Analysis and Computer Conference, pp. 423-439.

shown as functions of internal pressure. Figure 2 shows the distributions of radial, tangential and axial stress components in a pressurized tube when half of the tube is plastic. The pressure required to achieve this state is $0.7378 \sigma_0$ based on NASTRAN code and $0.7356 \sigma_0$ based on the finite-difference solution.⁴ Both codes indicate that the maximum tangential stress occurs at the elastic-plastic interface. As demonstrated in Figures 1 and 2, the NASTRAN results are in excellent agreement with those based on the finite-difference approach.⁴

EXAMPLE 2. Consider a two-dimensional elastic-plastic thick-walled cylinder problem as shown in Figure 3. The tube with inner radius (1"), outer radius (2") and length (4") is loaded uniformly over a middle portion (2") of the inner surface. The mesh generation and the loading for the half of the undeformed structure is shown in the figure. This problem was solved in Reference 5 based on a scale loading approach. The first load factor is the upper limit of the elastic solution and ten additional increments were needed until one of the outside elements becomes yielded. The same load factors were used to obtain the NASTRAN solution. Both programs indicate that the sequence in which the elements become plastic is 1,5,9,2,13,6,10,3,7,14,11,17,4. Some steps will cause more than one element to become

⁴P. C. T. Chen, "A Finite-Difference Approach to Axisymmetric Plane Strain Problems Beyond the Elastic Limit," To appear in Trans. 25th Conference of Army Mathematicians, 1979.

⁵P. C. T. Chen, "Numerical Solution of Gun Tube Problems in the Elastic-Plastic Range," Proceedings of the 1977 Army Numerical Analysis and Computer Conference, pp. 423-439.

plastic and those elements with effective stress $\bar{\sigma} \geq 0.99 \bar{\sigma}_0$ have been considered as yielded. The numerical results for the radial displacement at the inside, u_a (point 1) and outside, u_b (point 5) as functions of internal pressure are shown in Figure 4. The stress components at the centroid of one inside element (No. 1) are shown in Figure 5. The effect of loading history on the displacements and stresses can be seen from Figures 4 and 5. A comparison of the results between NASTRAN program and reference 5 indicates that very good agreement has been achieved.

CONCLUSION

An elastic-plastic trapezoidal ring element has been implemented in NASTRAN computer program. Its application to elastic-plastic problems of rotational symmetry has been demonstrated by solving two thick-walled tube problems. The NASTRAN results for both problems are in excellent agreement with the other results.

⁵P. C. T. Chen, "Numerical Solution of Gun Tube Problems in the Elastic-Plastic Range," Proceedings of the 1977 Army Numerical Analysis and Computer Conference, pp. 423-439.

REFERENCES

1. W. Pilkey, K. Saczalski, and H. Schaeffer, "Structural Mechanics Computer Programs, Surveys, Assessments and Availability," University Press of Virginia, 1974.
2. "NASTRAN Theoretical Manual," NASA SP-221 (01), 1972.
3. J. L. Swedlow, "The Thickness Effect and Plastic Flow in Cracked Plates," ARL 65-216, Aerospace Research Laboratory, Office of Aerospace Research, October 1965.
4. P. C. T. Chen, "A Finite-Difference Approach to Axisymmetric Plane Strain Problems Beyond the Elastic Limit," To appear in Trans. 25th Conference of Army Mathematicians, 1979.
5. P. C. T. Chen, "Numerical Solution of Gun Tube Problems in the Elastic-Plastic Range," Proceedings of the 1977 Army Numerical Analysis and Computer Conference, pp. 423-439.
6. Y. Yamada, N. Yoshimura, and T. Sakurai, "Plastic Stress-Strain Matrix and Its Application for the Solution of Elastic-Plastic Problems by the Finite Element Method," Int. J. Mech. Sci., Vol. 10, pp. 345-354, 1968.
7. P. C. T. Chen, "Elastic-Plastic Solution of a Two-Dimensional Tube Problem by the Finite Element," Trans. Nineteenth Conference of Army Mathematicians, pp. 763-784.
8. "NASTRAN Programmers' Manual," NASA SP-223 (01), 1972.

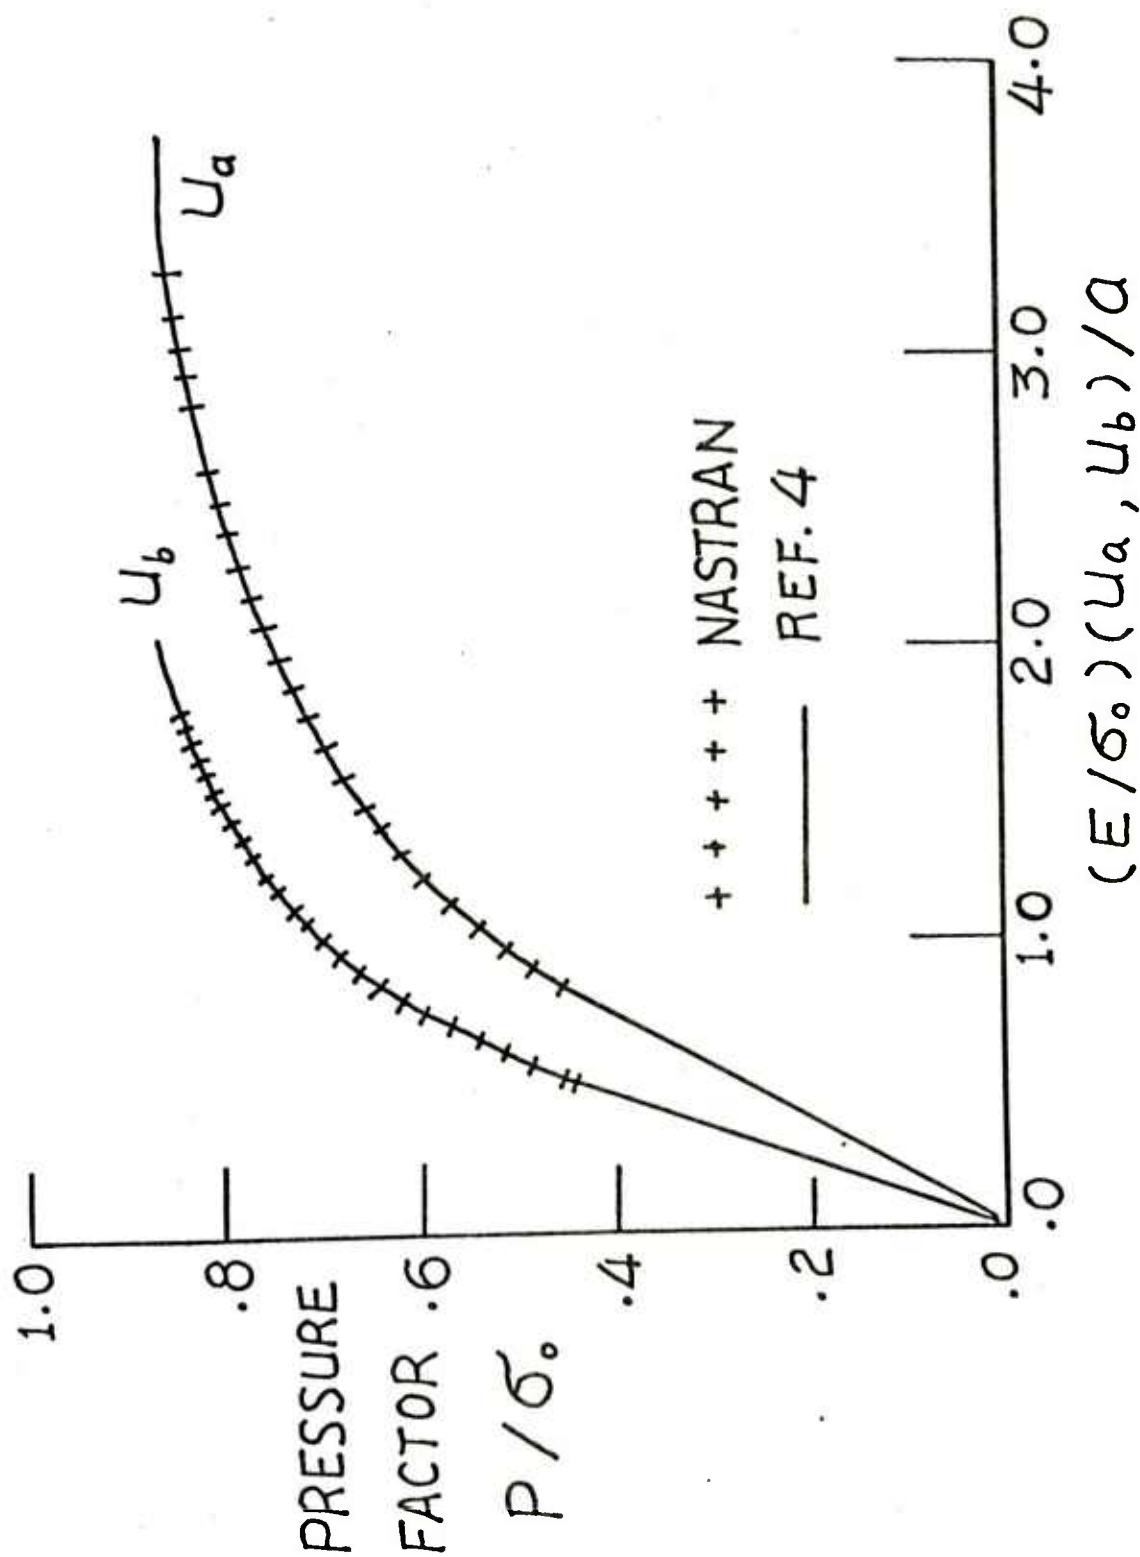


Figure 1. Radial displacements in a pressurized tube.

STRESSES

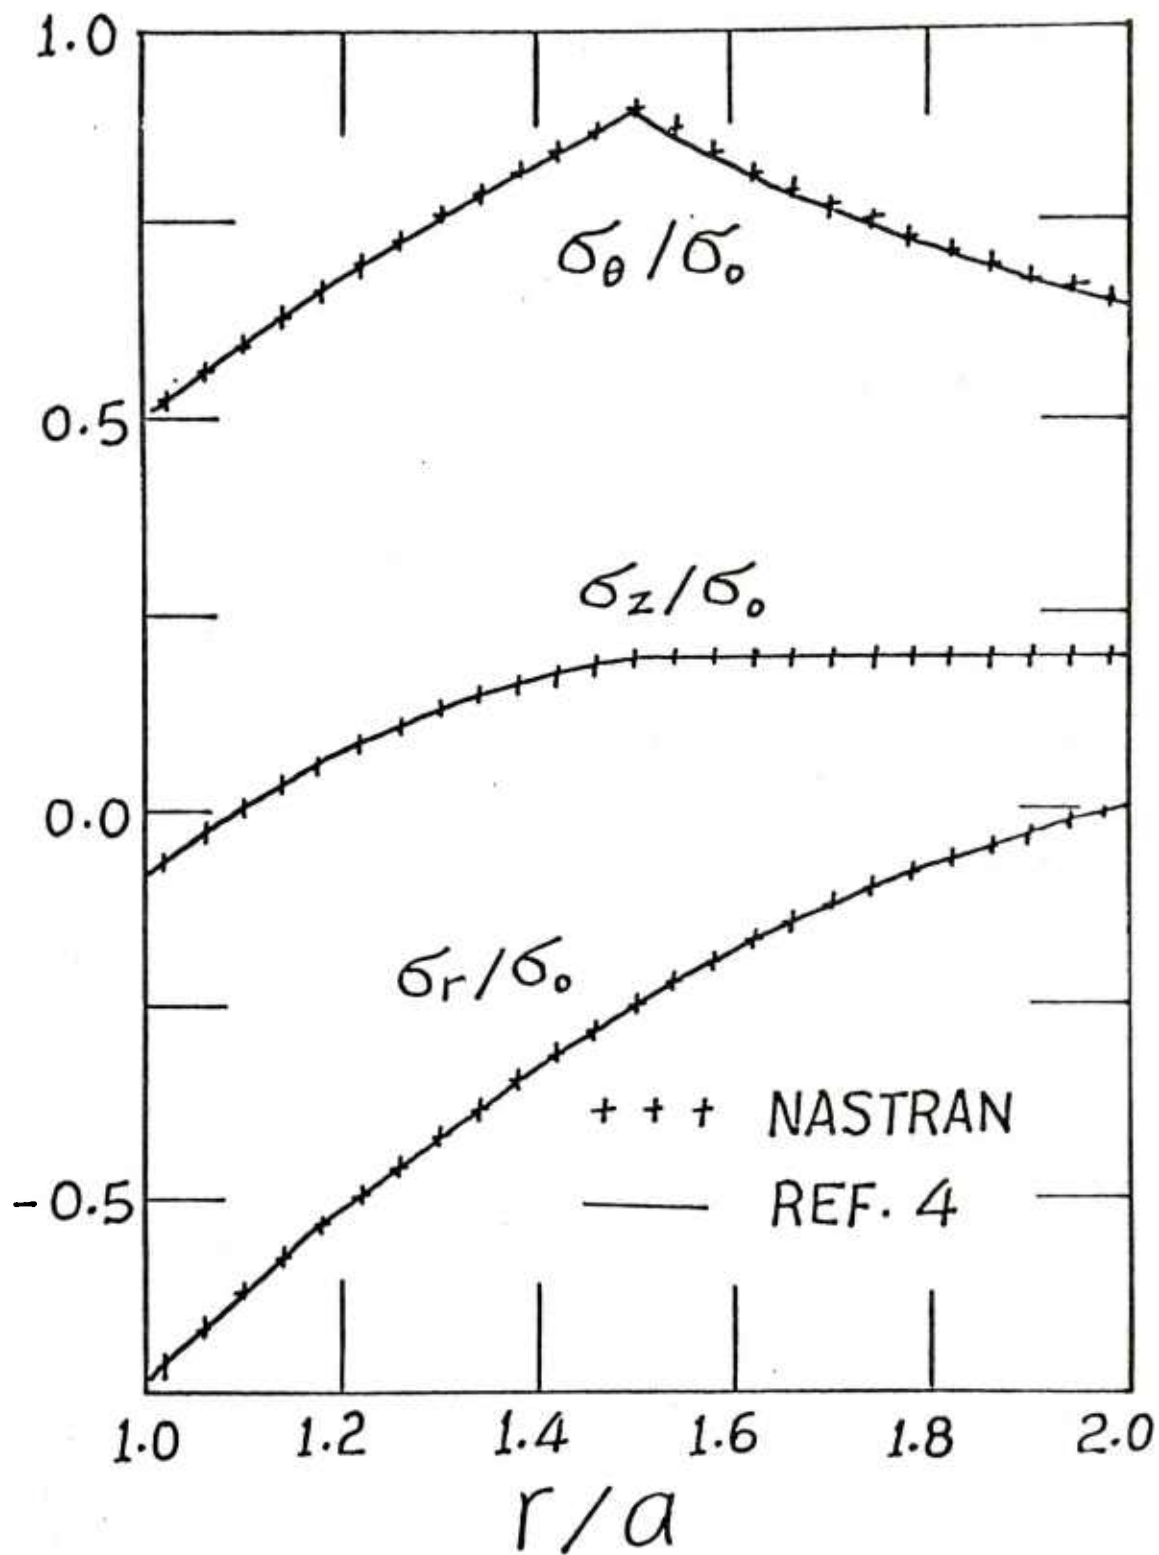


Figure 2. Stresses in a pressurized tube.

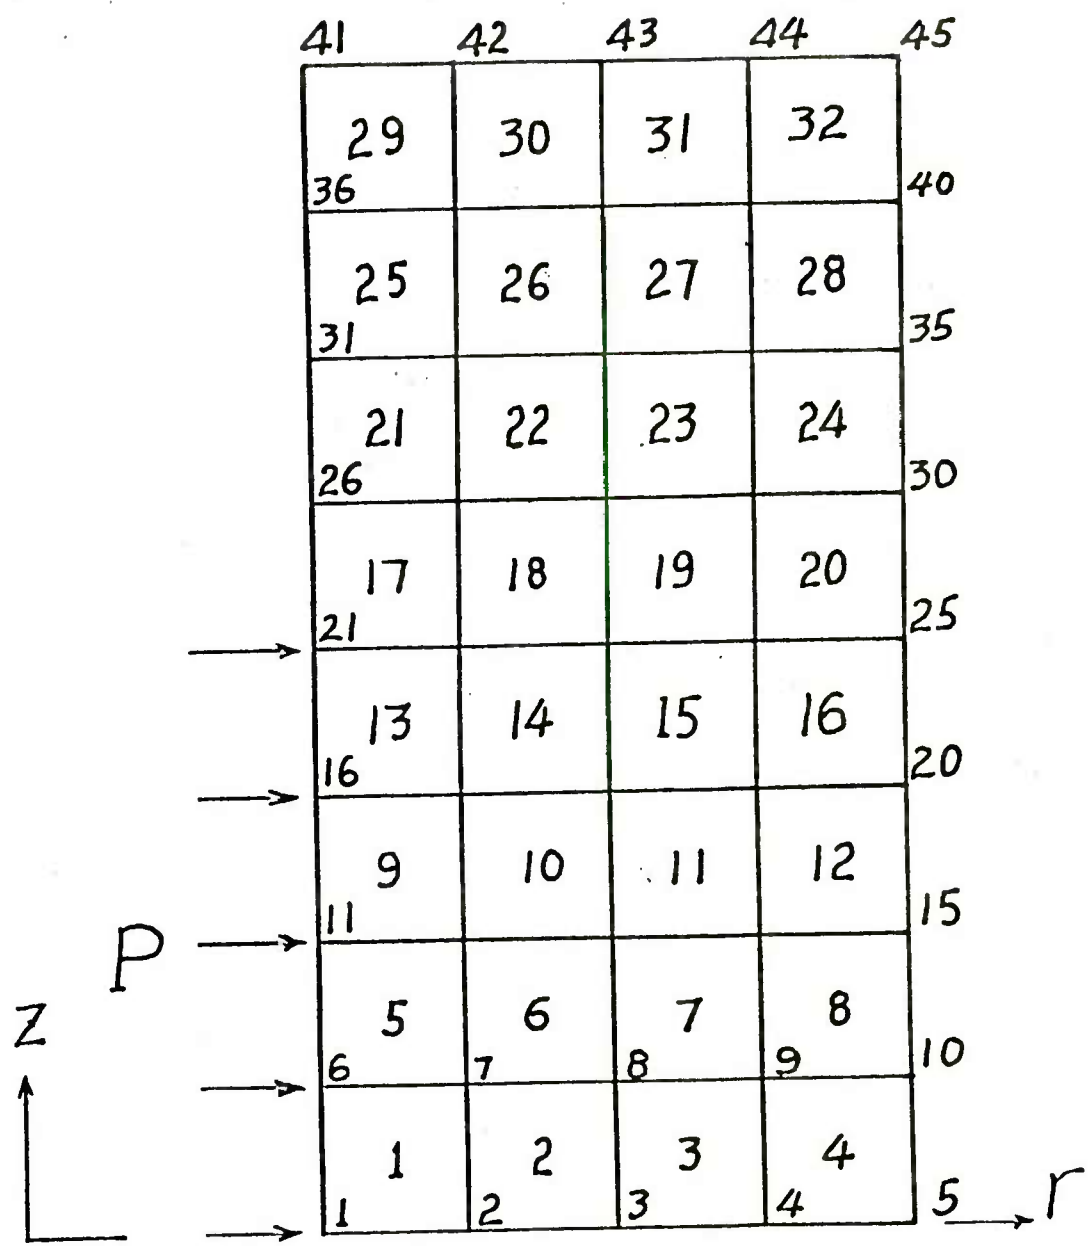


Figure 3. Two-dimensional elastic-plastic tube.

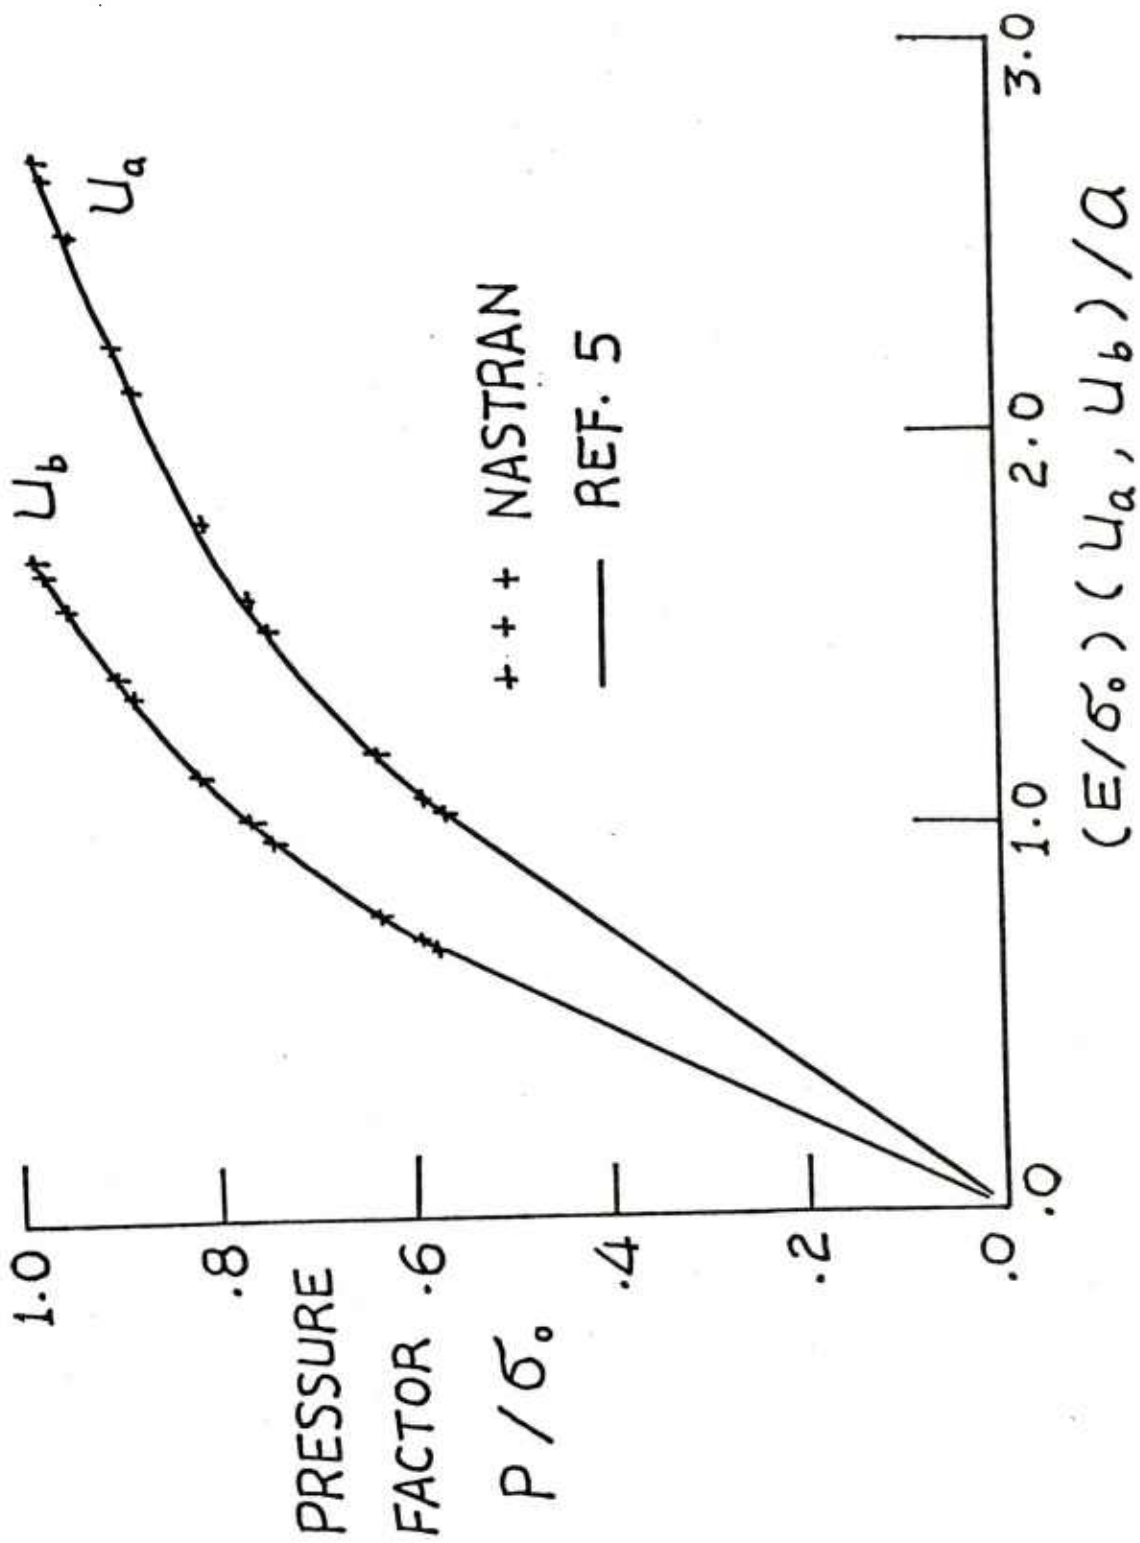


Figure 4. Radial displacements in a two-dimensional tube.

STRESSES IN EL. 1

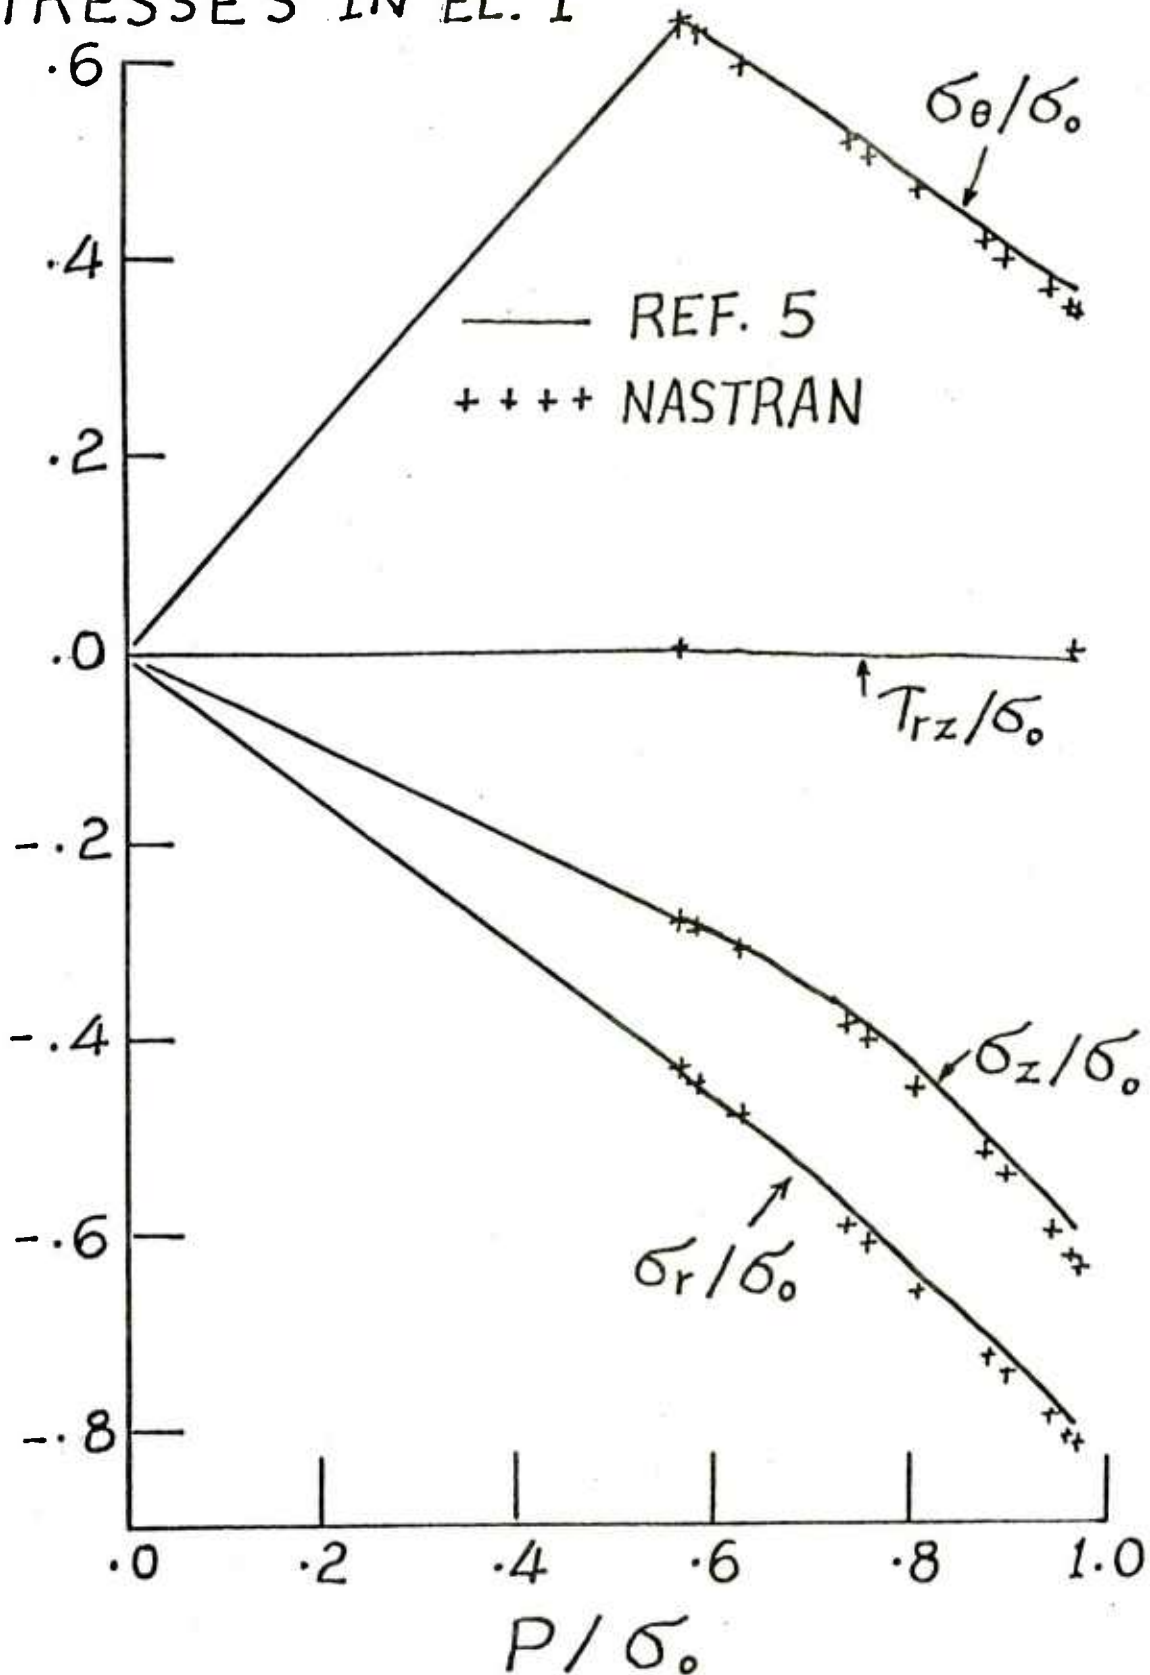


Figure 5. Stresses in a two-dimensional tube.

WATERVLIET ARSENAL INTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>
COMMANDER	1
DIRECTOR, BENET WEAPONS LABORATORY	1
CHIEF, DEVELOPMENT ENGINEERING BRANCH	1
ATTN: DRDAR-LCB-DA	1
-DM	1
-DP	1
-DR	1
-DS	1
-DC	1
CHIEF, ENGINEERING SUPPORT BRANCH	1
CHIEF, RESEARCH BRANCH	2
ATTN: DRDAR-LCB-RA	1
-RC	1
-RM	1
-RP	1
TECHNICAL LIBRARY	5
TECHNICAL PUBLICATIONS & EDITING UNIT	2
DIRECTOR, OPERATIONS DIRECTORATE	1
DIRECTOR, PROCUREMENT DIRECTORATE	1
DIRECTOR, PRODUCT ASSURANCE DIRECTORATE	1

NOTE: PLEASE NOTIFY DIRECTOR, BENET WEAPONS LABORATORY, ATTN:
DRDAR-LCB-TL, OF ANY REQUIRED CHANGES.

EXTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
ASST SEC OF THE ARMY RESEARCH & DEVELOPMENT ATTN: DEP FOR SCI & TECH THE PENTAGON WASHINGTON, D.C. 20315	1	COMMANDER US ARMY TANK-AUTMV R&D COMD ATTN: TECH LIB - DRDTA-JL MAT LAB - DRDTA-RK WARREN, MICHIGAN 48090	1 1
COMMANDER US ARMY MAT DEV & READ. COMD ATTN: DRCDE 5001 EISENHOWER AVE ALEXANDRIA, VA 22333	1	COMMANDER US MILITARY ACADEMY ATTN: CHMN, MECH ENGR DEPT WEST POINT, NY 10996	1
COMMANDER US ARMY ARRADCOM ATTN: DRDAR-TSS DRDAR-LCA (PLASTICS TECH EVAL CEN)	2 1	COMMANDER REDSTONE ARSENAL ATTN: DRSMI-RB DRSMI-RRS DRSMI-RSM ALABAMA 35809	2 1 1
DOVER, NJ 07801			
COMMANDER US ARMY ARRCOM ATTN: DRSAR-LEP-L ROCK ISLAND ARSENAL ROCK ISLAND, IL 61299	1	COMMANDER ROCK ISLAND ARSENAL ATTN: SARRI-ENM (MAT SCI DIV) ROCK ISLAND, IL 61202	1
DIRECTOR US ARMY BALLISTIC RESEARCH LABORATORY ATTN: DRDAR-TSB-S (STINFO) ABERDEEN PROVING GROUND, MD 21005	1	COMMANDER HQ, US ARMY AVN SCH ATTN: OFC OF THE LIBRARIAN FT RUCKER, ALABAMA 36362	1
COMMANDER US ARMY ELECTRONICS COMD ATTN: TECH LIB FT MONMOUTH, NJ 07703	1	COMMANDER US ARMY FGN SCIENCE & TECH CEN ATTN: DRXST-SD 220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	1
COMMANDER US ARMY MOBILITY EQUIP R&D COMD ATTN: TECH LIB FT BELVOIR, VA 22060	1	COMMANDER US ARMY MATERIALS & MECHANICS RESEARCH CENTER ATTN: TECH LIB -DRXMR-PL WATERTOWN, MASS 02172	2

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAR-ICB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.

EXTERNAL DISTRIBUTION LIST (CONT)

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
COMMANDER US ARMY RESEARCH OFFICE P.O. BOX 1211 RESEARCH TRIANGLE PARK, NC 27709	1	COMMANDER DEFENSE DOCU CEN ATTN: DDC-TCA CAMERON STATION ALEXANDRIA, VA 22314	12
COMMANDER US ARMY HARRY DIAMOND LAB ATTN: TECH LIB 2800 POWDER MILL ROAD ADELPHIA, MD 20783	1	METALS & CERAMICS INFO CEN BATTELIE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
DIRECTOR US ARMY INDUSTRIAL BASE ENG ACT ATTN: DRXPE-MT ROCK ISLAND, IL 61201	1	MPDC 13919 W. BAY SHORE DR. TRAVERSE CITY, MI 49684	1
CHIEF, MATERIALS BRANCH US ARMY R&S GROUP, EUR BOX 65, FPO N.Y. 09510	1	MATERIEL SYSTEMS ANALYSIS ACTV ATTN: DRXSY-MP ABERDEEN PROVING GROUND MARYLAND 21005	1
COMMANDER NAVAL SURFACE WEAPONS CEN ATTN: CHIEF, MAT SCIENCE DIV DAHLGREN, VA 22448	1		
DIRECTOR US NAVAL RESEARCH LAB ATTN: DIR, MECH DIV CODE 26-27 (DOC LIB) WASHINGTON, D.C. 20375	1 1		
NASA SCIENTIFIC & TECH INFO FAC P.O. BOX 8757, ATTN: ACQ BR BALTIMORE/WASHINGTON INTL AIRPORT MARYLAND 21240	1		

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAR-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.