

MEMORANDUM REPORT ARBRL-MR-02997

(Supersedes IMR No. 620)

MUZZLE BLAST OVERPRESSURE LEVELS ON THE
AH-1S HELICOPTER TOW SIGHT UNIT

Edward M. Schmidt
Edmund J. Gion

TECHNICAL
LIBRARY

March 1980



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
BALLISTIC RESEARCH LABORATORY
ABERDEEN PROVING GROUND, MARYLAND

Approved for public release; distribution unlimited.

DTIC QUALITY INSPECTED 3

Destroy this report when it is no longer needed.
Do not return it to the originator.

Secondary distribution of this report by originating
or sponsoring activity is prohibited.

Additional copies of this report may be obtained
from the National Technical Information Service,
U.S. Department of Commerce, Springfield, Virginia
22151.

The findings in this report are not to be construed as
an official Department of the Army position, unless
so designated by other authorized documents.

*The use of trade names or manufacturers' names in this report
does not constitute indorsement of any commercial product.*

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER MEMORANDUM REPORT ARBRL-MR-02997	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) MUZZLE BLAST OVERPRESSURE LEVELS ON THE AH-1S HELICOPTER TOW SIGHT UNIT		5. TYPE OF REPORT & PERIOD COVERED Final
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Edward M. Schmidt and Edmund J. Gion		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Ballistic Research Laboratory (ATTN: DRDAR-BLL) Aberdeen Proving Ground, MD 21005		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS RDT&E 1L161102AH43
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Armament Research & Development Command US Army Ballistic Research Laboratory (ATTN: DRDAR-BL) Aberdeen Proving Ground, MD 21005		12. REPORT DATE MARCH 1980
		13. NUMBER OF PAGES 33
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This report supersedes Interim Memorandum Report No. 620 dated October 1978.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Muzzle Blast Aircraft Cannon AH-1S Helicopter TOW Sight Unit		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) (ner/ems) An experimental program was conducted to measure the muzzle blast overpressures upon a simulated AH-1S Helicopter TOW Sight Unit (TSU). Different weapon configurations were fired to examine the effect of gun caliber and the presence of muzzle devices. Surface pressure distributions were measured along the line of symmetry of the TSU and were supplemented by spark shadowgraphs of the blast wave propagation. Limited data was acquired in the BRL Aerodynamics Range to measure the trajectory perturbation associated with the internal gasdynamics of the muzzle devices.		

TABLE OF CONTENTS

	<u>Page</u>
LIST OF ILLUSTRATIONS	5
I. INTRODUCTION	7
II. EXPERIMENT	7
III. RESULTS	9
A. 20mm Bare Muzzle	9
B. 30mm Bare Muzzle	10
C. 30mm Hughes Suppressor	10
D. 30mm BRL Suppressor	10
E. Trajectory Perturbations	11
IV. SUMMARY AND CONCLUSIONS	12
DISTRIBUTION LIST	29

LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1.	Schematic of Nose Section of AH-1S Helicopter Showing the TOW Sight Unit (TSU) and Relative Locations of the Muzzles of the 20mm and 30mm Aircraft Cannon.	14
2.	Photograph of Test Set-up.	15
3.	Schematic of Test Set-up Showing Relative Geometries	15
4.	Photographs of Muzzle Configurations Tested with 30mm Chain Gun.	16
5.	Schematic of BRL Blast Suppressor for 30mm Gun Mounted on AH-1S Helicopter.	17
6.	Spark Shadowgraphs of 20mm Muzzle Blast Arriving at and Reflecting from Simulated TSU	18
7.	Pressure Data, 20mm, Bare Muzzle	19
8.	Spark Shadowgraphs of Muzzle Blast from 30mm, Chain Gun, with Bare Muzzle.	20
9.	Pressure Data, 30mm, Bare Muzzle	21
10.	Spark Shadowgraph of Muzzle Blast from 30mm, Chain Gun, with Hughes Suppressor.	23
11.	Pressure Data, 30mm, Hughes Suppressor	24
12.	Spark Shadowgraph of Muzzle Blast from 30mm, Chain Gun, with BRL Suppressor	26
13.	Pressure Data, 30mm with BRL Suppressor	27

I. INTRODUCTION

A universal turret, compatible with both 20mm and 30mm cannon, was under consideration for installation on the AH-1S Helicopter. The aircraft was to be fitted with a 20mm Gatling Gun which was to be replaced by the 30mm Chain Gun as it became available. In order to upgun the system, it is necessary to insure that critical aircraft components, particularly the TOW Sight Unit (TSU), are not damaged by the increased blast from the 30mm cannon. At the request of the Project Manager, Advanced Attack Helicopter, measurements were taken of the muzzle blast overpressures on the surface of a simulated TSU. The weapons included in the firing program were the 20mm Vulcan Gatling Gun and the 30mm Chain Gun. The 20mm data are taken as a baseline against which the 30mm data are compared. Subsequent to these tests, the 30mm cannon was dropped from consideration as an AH-1S armament subsystem.

A schematic of the AH-1S Helicopter showing the relative location of the TSU and cannon is presented in Figure 1. One of the main differences between the 20mm and 30mm guns is in the length of the barrel. The 20mm barrel length is 1.4m while the 30mm barrel is only 1.07m long. Thus, the muzzle of the 30mm cannon is significantly closer to the TSU. This, coupled with the increased blast strength from the larger caliber weapon, will cause higher overpressures on the TSU surface. To control the level of pressure on the TSU, it is necessary to equip the 30mm cannon with some form of muzzle device. In the current tests, two muzzle devices were installed: a multiple baffle device designed by Hughes Helicopter Corporation and an extension nozzle designed by BRL. The Hughes design serves a dual function: it acts as both a blast suppressor and as a muzzle brake. This combination results in a device which can not function optimally in either roles. The BRL design was optimized for blast suppression and as such may produce unacceptably high recoil levels.

II. EXPERIMENT

A photograph of the test layout is shown in Figure 2. The guns are rigidly mounted to the firing platform. Recoil is prevented in order to maintain the relative geometry between the weapon muzzle and TSU. The simulated TSU is a rectangular block of aluminum having the dimensions: 0.4m x 0.2m x 0.05m. The simulated TSU is instrumented with four piezoelectric pressure transducers distributed along the vertical line of symmetry (plane of symmetry of the aircraft). The gun is oriented horizontally; therefore, the TSU is adjusted to replicate the firing geometry of the weapon relative to the helicopter. To provide a worst case, the (maximum) firing elevation of 14° and azimuth of 0° were selected for all test firings.

The test geometry is shown schematically in Figure 3. The values of the parameters for the various test configurations are summarized below:

TABLE I. Test Geometries

Configuration	θ	x_o (m)	y_o (m)
20mm, bare muzzle	52.5°	-0.329	0.276
30mm, bare muzzle	52.5°	-0.011	0.276
30mm, Hughes suppressor	52.5°	-0.184	0.276
30mm, BRL suppressor	52.5°	-0.392	0.276

As would be anticipated, both the relative angle, θ , and the vertical distance, y_o , between the gun and the TSU remain fixed for all firings.

Only the horizontal separation between the exit from the gun or muzzle device and the center of the TSU varies. The variation in this dimension for the 30mm is caused by the different lengths of suppressors. The actual gun muzzle location was fixed. Also shown on Figure 3 are the locations and station numbers of the pressure transducers used to measure surface overpressure levels on the simulated TSU.

In addition to pressure measurements, spark shadowgraphs were taken of the flow field about the weapon muzzle and over the TSU. The optical technique utilizes a Fresnel lens to focus the light from an 0.5 μ s duration spark onto the objective lens of a 4"x5" camera. Only one photograph is obtained of a firing event. The spark delays were varied in order to provide coverage of the blast wave arrival at and reflection from the TSU surface.

As a baseline weapon, the 20mm Vulcan cannon was selected. This gun has already been installed on certain AH-1J Helicopters and has apparently not degraded the aircraft performance. Additionally, the weapon is scheduled for installation on the AH-1S Helicopter as the initial armament in the Universal Turret. The firings used a 20mm Mann barrel having a length of 1.524m, a chamber volume of

$4.17 \times 10^{-5} \text{ m}^3$, and a rifling twist of one turn in 25 calibers. The projectile is an M55A2 training round weighing 98g and having a length of 3.75 calibers. A charge of 33.3g launches the projectile at a velocity of 910m/s.

The 30mm weapon was a Mann barrel provided by Hughes Helicopter Corporation as a representation of the current Chain Gun to be used on both the AH-1S and AAH. The weapon had a 1.07m barrel and fired the XM788 TP round.

The projectile weighs 233g, and is propelled to a muzzle velocity of 802 m/s by 53.2g of propellant. The 30mm cannon was fired with bare muzzle, a Hughes blast suppressor, and a BRL blast suppressor, Figure 4. The Hughes suppressor is a multiple baffle device which vents the muzzle gases downward to provide attenuation of the blast field above the weapon. The design provides for recoil reduction as well as blast suppression; however, in order to reduce recoil, the exhausting gases must be deflected from the axial direction. This results in a tendency to increase the blast overpressure levels behind the weapon. Obviously, the classic trade off between recoil reduction and blast overpressure must be considered. To provide an alternative approach which demonstrates the potential for optimal blast attenuation, the BRL blast suppressor is designed as an extension nozzle to move the center of the blast further from the aircraft and to provide focusing of the blast forward of the muzzle, Figure 5. The BRL suppressor is designed for one property: reduction of blast to the rear of the weapon muzzle. It provides no recoil reduction and, in fact, increases the recoil impulse slightly. The inclusion of this device in the test program is designed to demonstrate that the 30mm muzzle blast can be brought under control and that trade offs between recoil and blast can be developed which produce an acceptable weapon configuration.

III. RESULTS

A. 20mm Bare Muzzle

The spark shadowgraphs, Figure 6, show that the blast wave from the muzzle of the 20mm cannon is a single strong shock which arrives first at the top of the TSU (near gage station 4) and propagates toward the bottom; however, since the angle of incidence between the blast and the TSU is very small, the wave propagates rapidly across the plane surface. This behavior is reflected in the pressure data, Figure 7. The time is referenced to zero when the blast wave arrives at any gage station. In the present data, the blast arrives first at gauge station 4 and moves completely across the survey area within 100 μ s. The pressure pulse is typical of a blast from a single energy source: a short positive pulse which decays to a longer, subatmospheric recovery phase. The range of the peak pressures is from $2.25 \times 10^3 \text{ kg/m}^2$ (3.2 lb/in^2) at gauge 1 to $40.8 \times 10^3 \text{ kg/m}^2$ (5.8 lb/in^2) at gauge 4.

B. 30mm Bare Muzzle

In this firing, the muzzle of the gun is quite close to the surface of the TSU. As a result, the blast wave impinges first upon the lower portion of the TSU (gauge 1) and propagates upward across the face, Figure 8. This is also seen in the pressure data, Figure 9. The pressure pulses are quite similar to those of the 20mm cannon; however, the overpressure levels are much higher due to the closer proximity to the muzzle. The range of peak pressure is from $1.54 \times 10^5 \text{ kg/m}^2$ (22 lb/in²) at gauge 1 to $2.25 \times 10^5 \text{ kg/m}^2$ (32 lb/in²) at gauge 4.

C. 30mm Hughes Suppressor

The baffles and distributed vents of the Hughes suppressor serve to provide multiple origins for the blast wave, Figure 10. These spark shadowgraphs show that rather than a single strong wave, the blast is comprised of many weaker waves having origins scattered along the length of the muzzle device. This would tend to decrease the magnitude of the peak overpressure level of any single wave but stretch out the positive phase duration due to repetitive blast arrivals. Again, the blast arrives first at gauge 1 and propagates upward over the face of the TSU. The pressure data show the changes in the nature of the blast wave, Figure 11. A multitude of pressure peaks are observed as the waves arrive at and reflect from the TSU surface. The maximum pressure level is not attained with the first peak, but rather with one of the secondary pulses. The positive phase duration of this blast is roughly three times that of the blast with a bare muzzle; however, the reduction in pressure level is significant. The peak overpressures range from $28.1 \times 10^3 \text{ kg/m}^2$ (4 lb/in²) at gauge 4 to $56.3 \times 10^3 \text{ kg/m}^2$ (8 lb/in²) at gauge 2. The reason for the maximum overpressure being located at gauge 2 is not clear. The complexity of the multiple blast waves suggests that the order of arrival of the various waves may be important as well as the location of the gauge relative to the muzzle device vents.

D. 30mm BRL Suppressor

The spark shadowgraphs of the blast show the presence of two distinct waves, Figure 12. These are due to the nature of the flow within the muzzle device. When the projectile leaves the muzzle and enters the device, the propellant gases expand around it into the nozzle. This generates the first strong blast. While the projectile is within the nozzle, it acts as a choke point preventing free exhaust of the propellant gas. Once the round exits the nozzle, the resultant secondary expansion of the propellant gases generates the second strong

blast wave. The two peaks and order of propagation of the blast wave are shown in the pressure data, Figure 13. Again the positive phase duration is longer than the case with the bare muzzle due to the multiple peaks and to the distance between the TSU and the origin of the blast. The most dramatic effect is the greatly reduced overpressures levels. The pressures range from $9.2 \times 10^3 \text{ kg/m}^2$ (1.3 lb/in^2) at gauge 1 to $21.1 \times 10^3 \text{ kg/m}^2$ (3 lb/in^2) at gauge 4. These levels are well below those measured the 20mm cannon.

E. Trajectory Perturbations

Following the measurement of blast overpressure, some of the remaining XM788 rounds were expended in an attempt to measure the effect of muzzle gasdynamics upon the projectile trajectory. Since the muzzle exhaust flow is constrained by both the Hughes and BRL suppressors, there is a possibility of enhanced loadings upon the projectile associated with the flow internal to the devices. Axial loadings would be reflected in an increase in the projectile launch velocity, while transverse loadings would be apparent in alteration of the yawing motion of the round.

The weapon was rigidly mounted and single round groups were fired from the 30mm cannon with a bare muzzle, the Hughes suppressor and the BRL suppressor. The experimental arrangement does not reproduce the actual system (gun/recoil system/airframe) dynamics during a realistic burst fire mode; however, comparison of the dynamics of rounds fired with the muzzle devices installed to the bare muzzle data will give an indication of the effects of altered muzzle gasdynamics.

Firings were conducted in the BRL Aerodynamics Range. Projectile yawing motion was measured at orthogonal spark shadowgraph stations located at 15, 20, 25, 30, 35, and 40 feet from the nominal location of the weapon muzzle. These measurements allowed the first maximum yaw and launch velocity to be determined. Again, the first maximum yaw is related to the magnitude of transverse angular velocity (impulse) imparted to the projectile during launch while the launch velocity can show change in the launch thrust. Table II summarizes the results obtained with the limited number of rounds available.

TABLE II: Launch Dynamics

Muzzle Configuration	Round	First Maximum Yaw (degrees)	Muzzle Velocity (m/s)
BARE MUZZLE	1	2.7	822
	2	3.3	802
	3	3.0	805
	4	2.7	804
HUGHES SUPPRESSOR	1	2.4	803
	2	4.3	800
	3	2.2	805
	4	3.6	806
	5	3.5	801
	6	2.5	803
	7	2.5	805
	8	6.1	803
BRL SUPPRESSOR	1	3.8	803
	2	2.3	802

The data is obviously incomplete due to limitations on the number of available rounds. It does not appear that a catastrophic growth in first maximum yaw or muzzle velocity can be associated with either of the muzzle devices. Compared to the bare muzzle data, the Hughes suppressor does develop a slightly greater level of first maximum yaw. No change in muzzle velocity is apparent in any of the configurations. Based on these results, it would be worthwhile to conduct a more complete test on a current configuration of the muzzle devices to determine the alteration of launch dynamics.

IV. SUMMARY AND CONCLUSIONS

A series of test firings were undertaken to determine the pressure levels upon the TSU of the AH-1S Helicopter during weapon firings. The measured pressure levels and total impulse* upon the TSU for the various configurations tested are summarized below:

**Impulse levels for a 2.54cm (1 inch) wide strip centered on the pressure transducers. The measured pressures were assumed to act uniformly across the strip and vertically a distance midway between successive gauges. This defines a force versus time history on the strip which may be integrated to obtain the total impulse.*

Configuration	Peak Overpressure Range kg/m^2 (lb/in^2)	Impulse N-s
20mm Bare Muzzle	23×10^3 - 41×10^3 (3.2 - 5.8)	1.57×10^{-3}
30mm Bare Muzzle	155×10^3 - 225×10^3 (22 - 32)	8.29×10^{-3}
30mm Hughes Suppressor	28×10^3 - 56×10^3 (4.0 - 8.0)	4.50×10^{-3}
30mm BRL Suppressor	9×10^3 - 21×10^3 (1.3 - 3.0)	1.23×10^{-3}

The tests demonstrated that the 30mm muzzle blast was significantly more powerful (on the TSU) than was the 20mm blast. This is due both to the increased size of the weapon bore and to the decreased tube length. Of the two suppressors tested, the Hughes device reduced peak overpressure by a factor of four; however, the impulse decreased only by a factor of two due to the extended positive phase duration of the blast wave. The BRL suppressor produces an order of magnitude drop in blast wave peak overpressure and reduces the impulse by a factor of 6.7. In fact, the BRL design reduces the pressure and impulse levels to values below those experienced with the 20mm.

The test results indicate that the 30mm muzzle blast impulse on TSU may be controlled. In order to achieve a balance between blast reduction and recoil attenuation, modifications to both the Hughes and BRL designs are required.

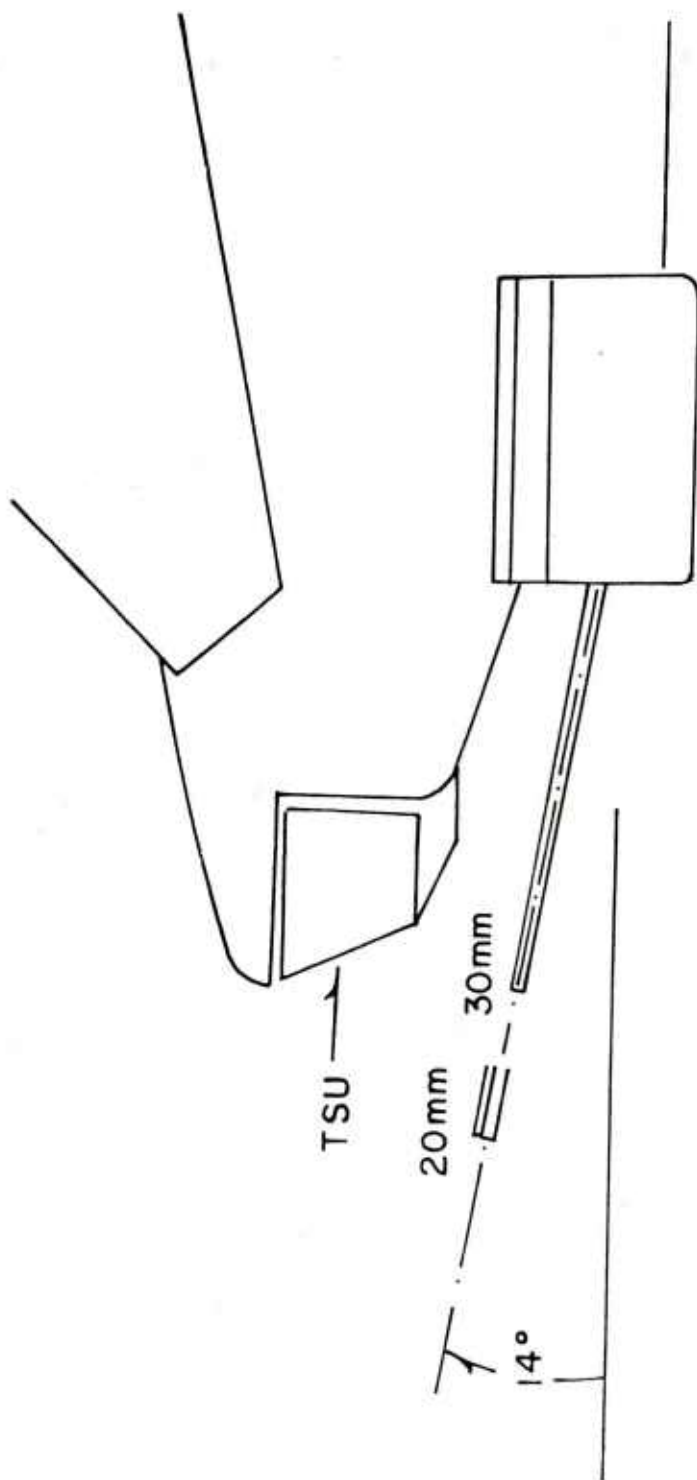


Figure 1. Schematic of nose section of AH-1S helicopter showing the TOW Sight Unit (TSU) and relative locations of the muzzles of the 20 mm and 30 mm aircraft cannon.

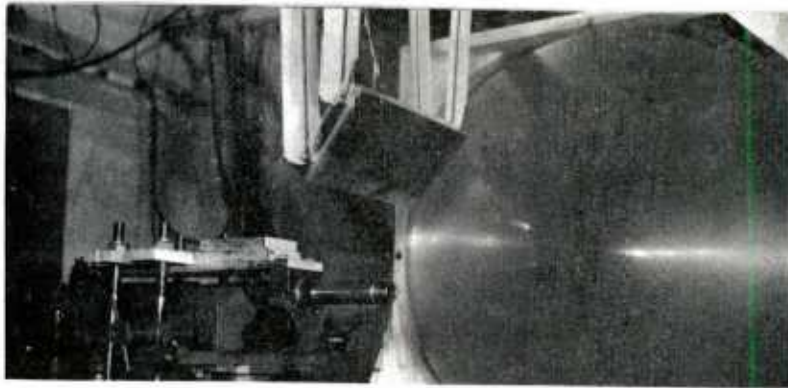


Figure 2. Photograph of test set-up.



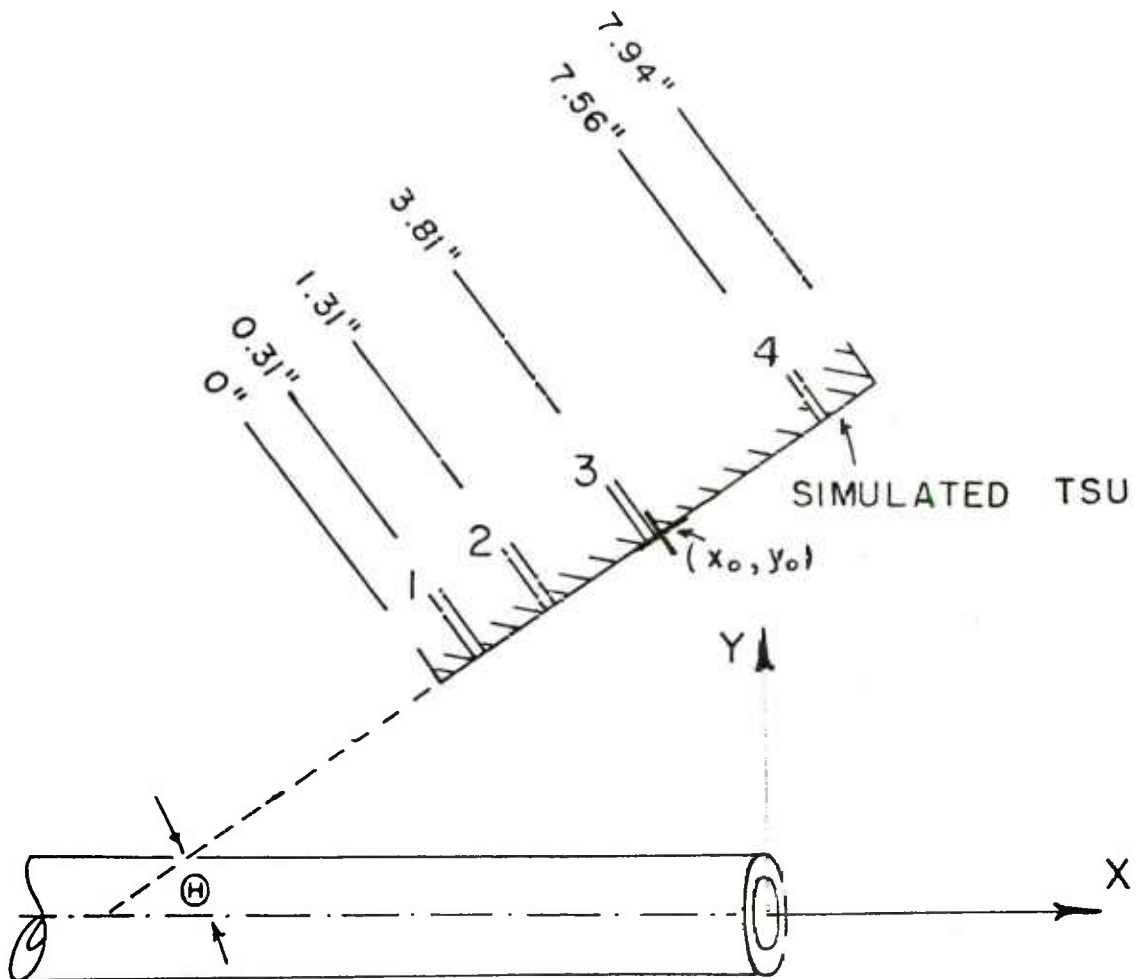



Figure 3. Schematic of test set-up showing relative geometries.

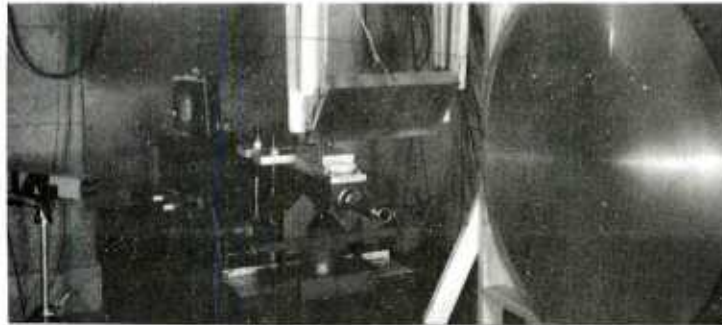

A. Bare muzzle

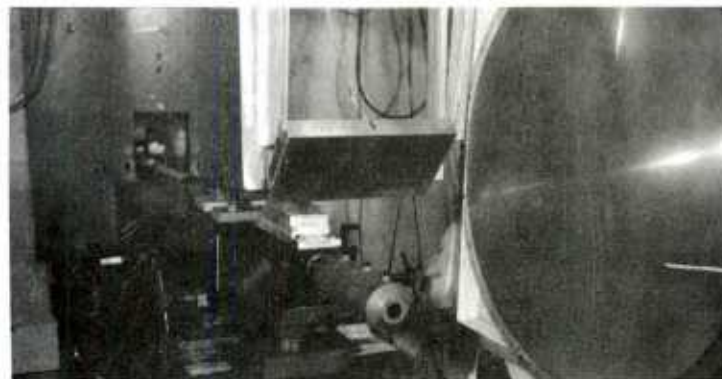

B. Hughes suppressor

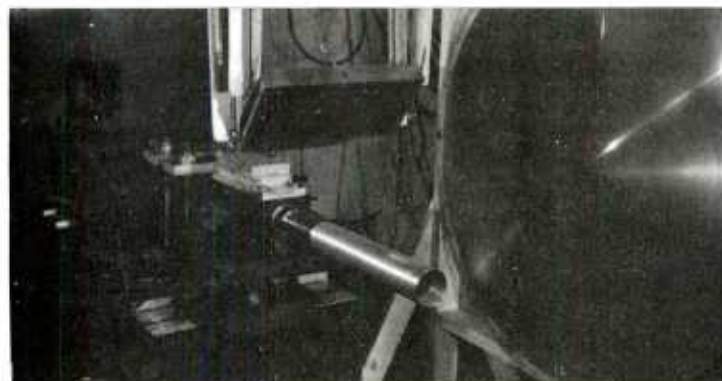

C. BRL suppressor

Figure 4. Photographs of muzzle configurations tested with 30 mm Chain Gun

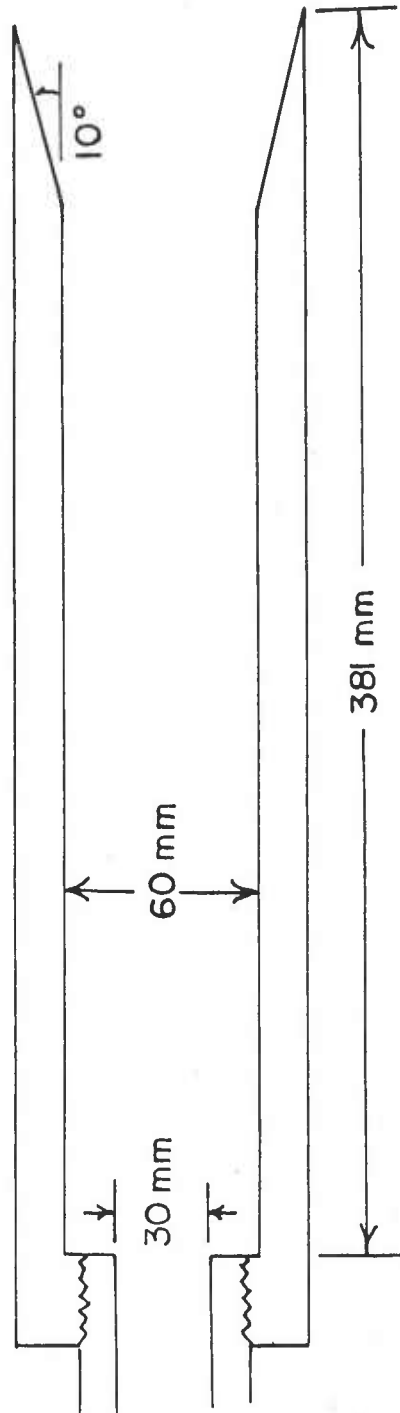


Figure 5. Schematic of BRL blast suppressor for 30 mm gun mounted on AH-1S helicopter.

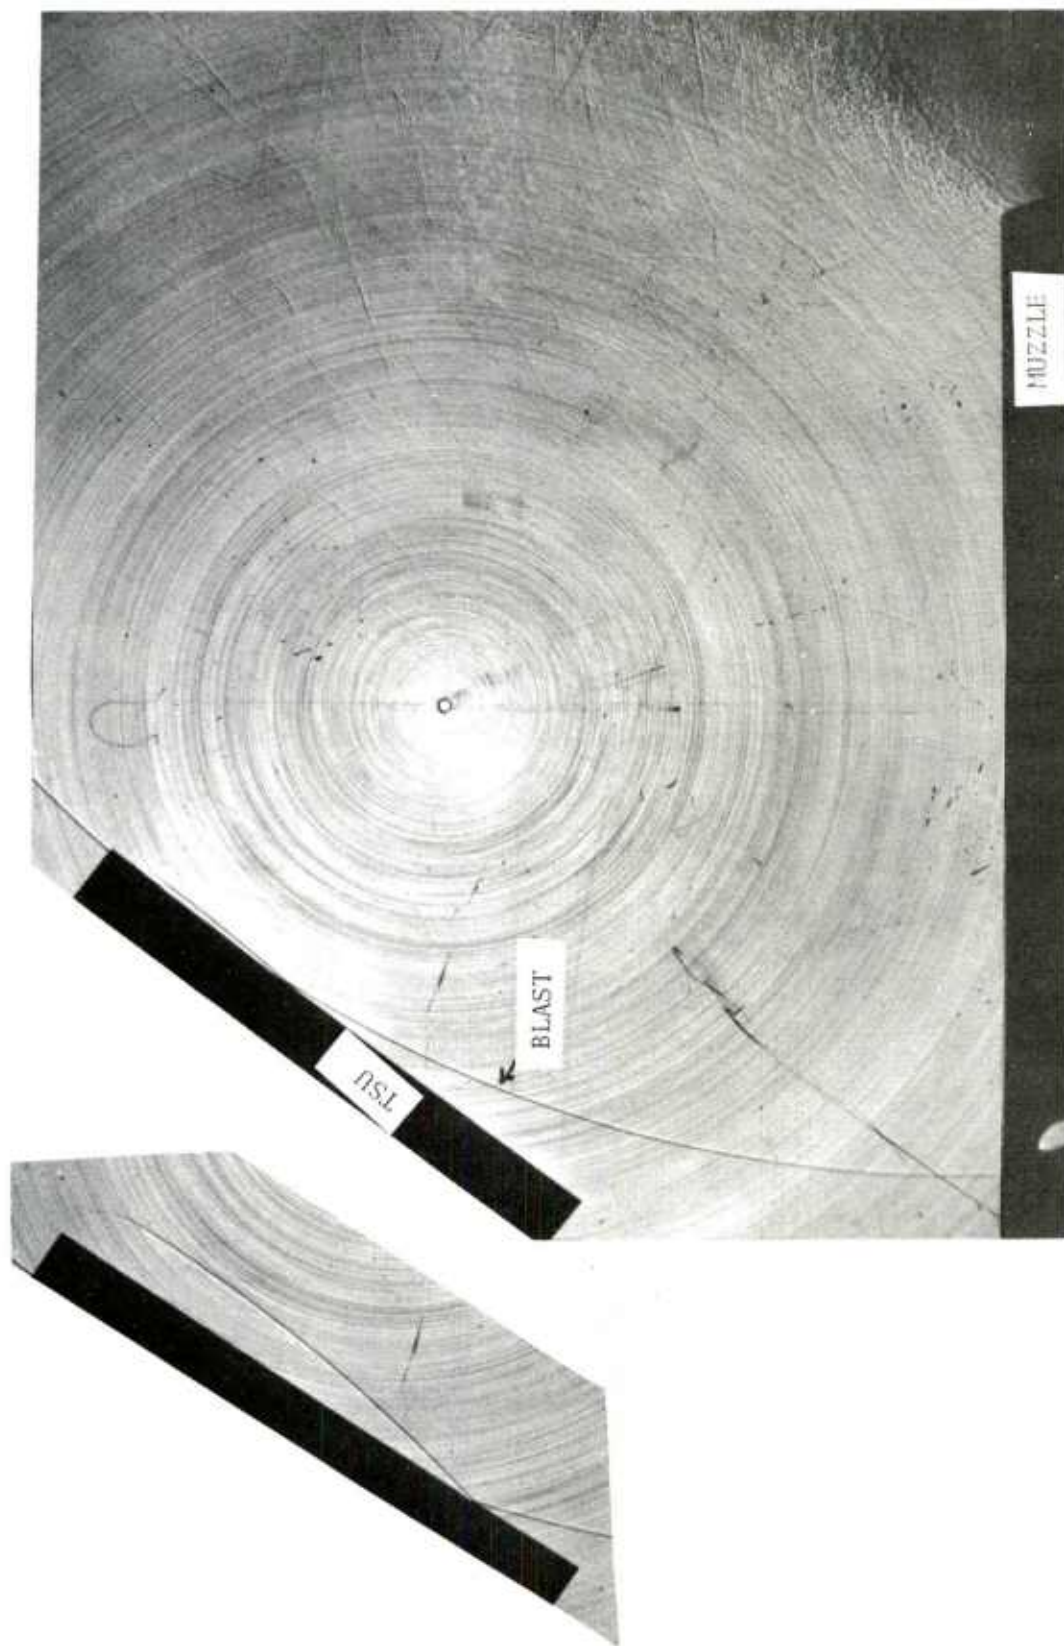


Figure 6. Spark shadowgraphs of 20 mm muzzle blast arriving at and reflecting from simulated TSU.

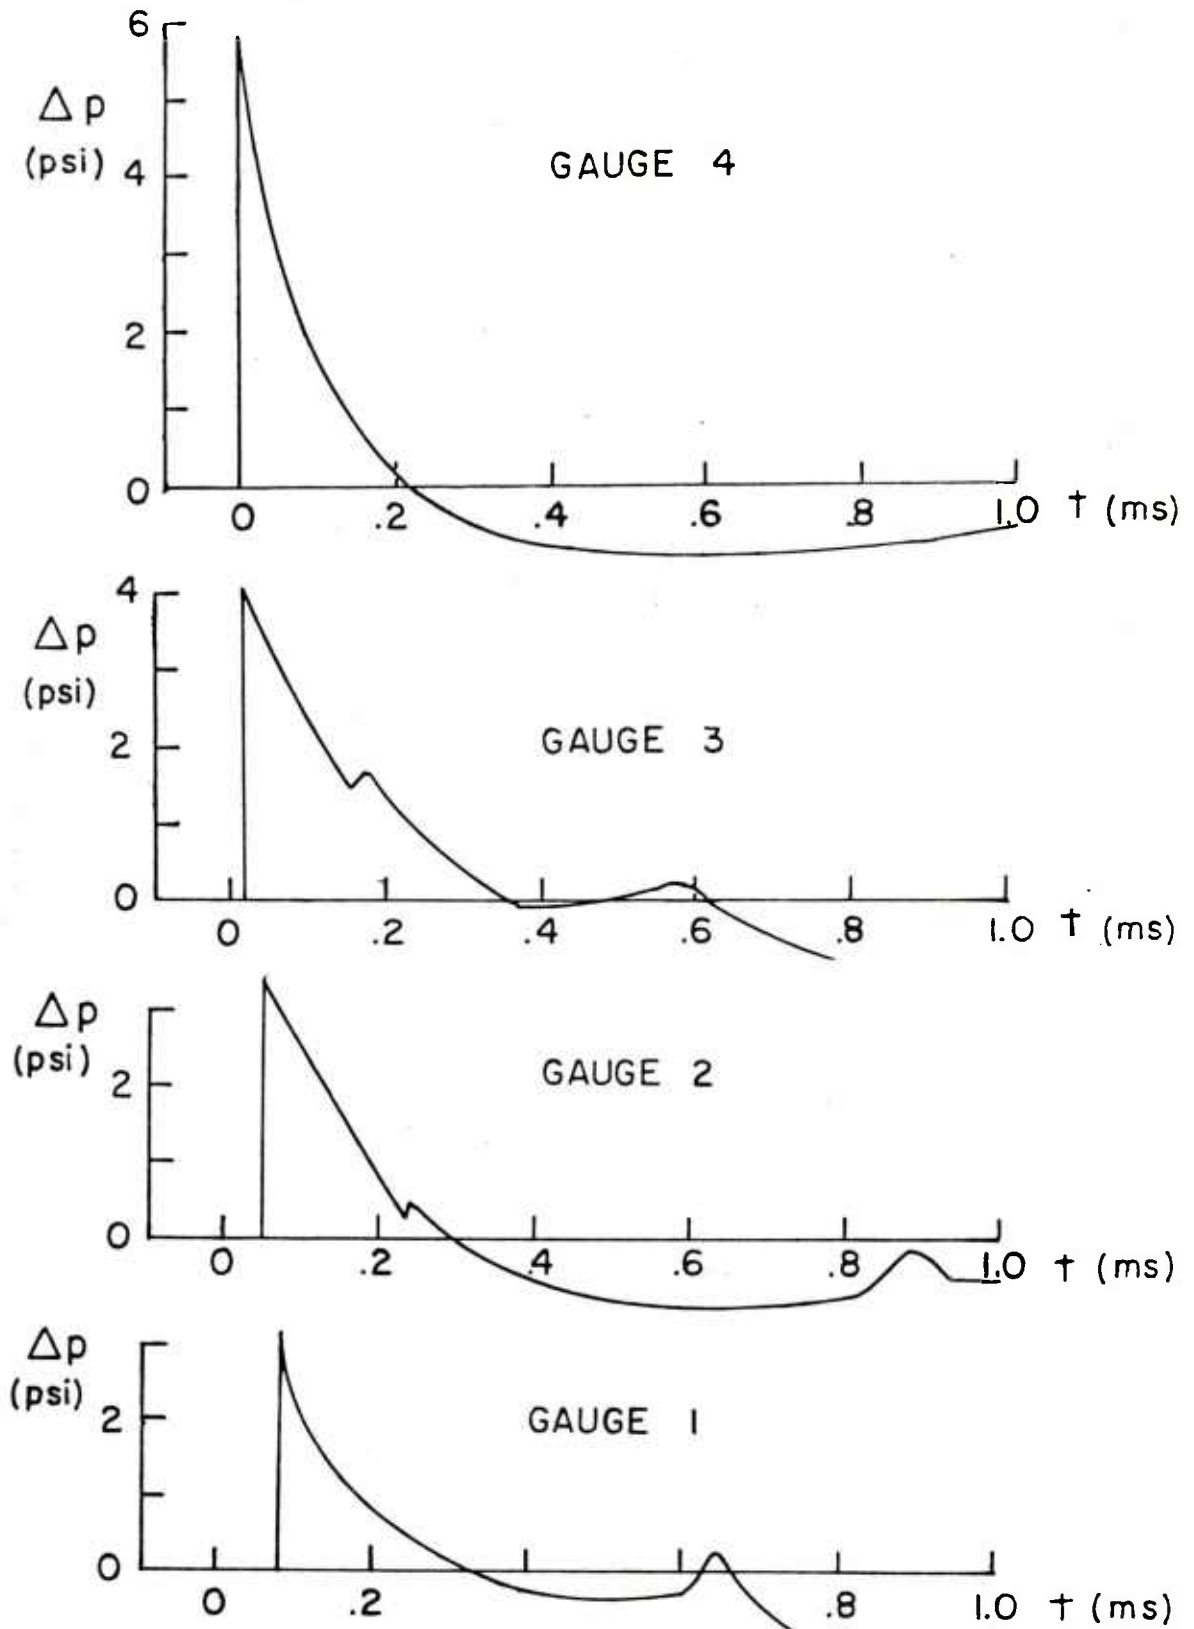


Figure 7. Pressure data, 20 mm, bare muzzle.

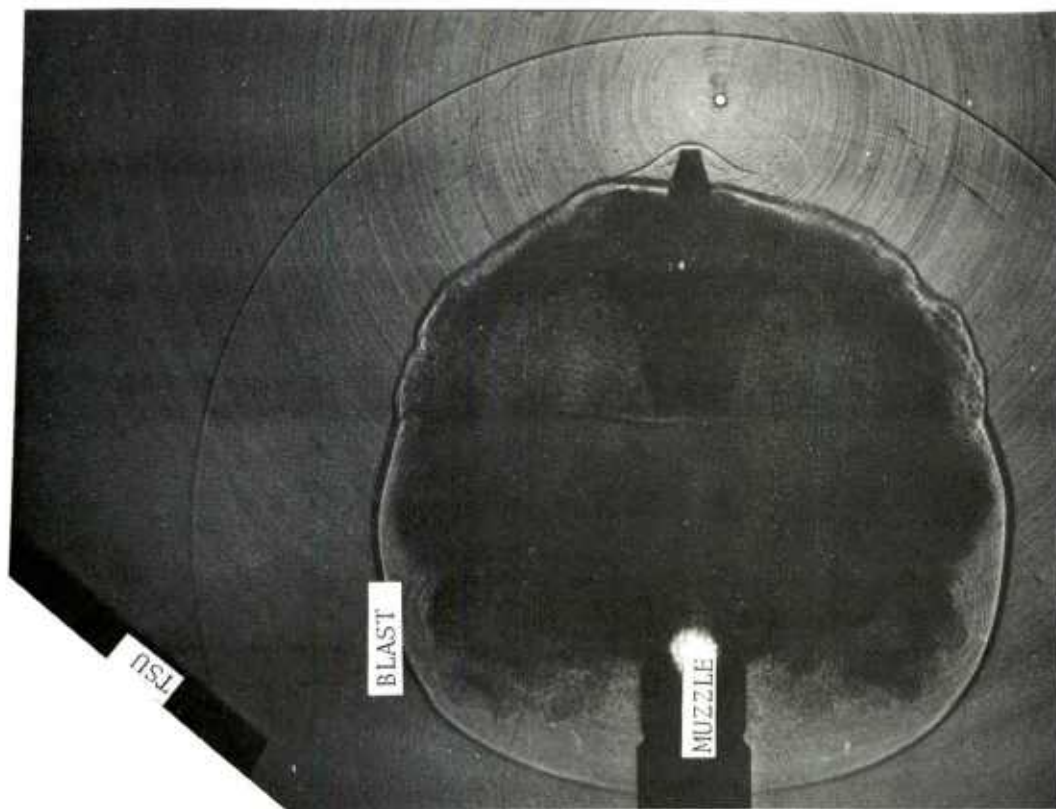


Figure 8. Spark shadowgraphs of muzzle blast from 30 mm, Chain Gun, with bare muzzle.

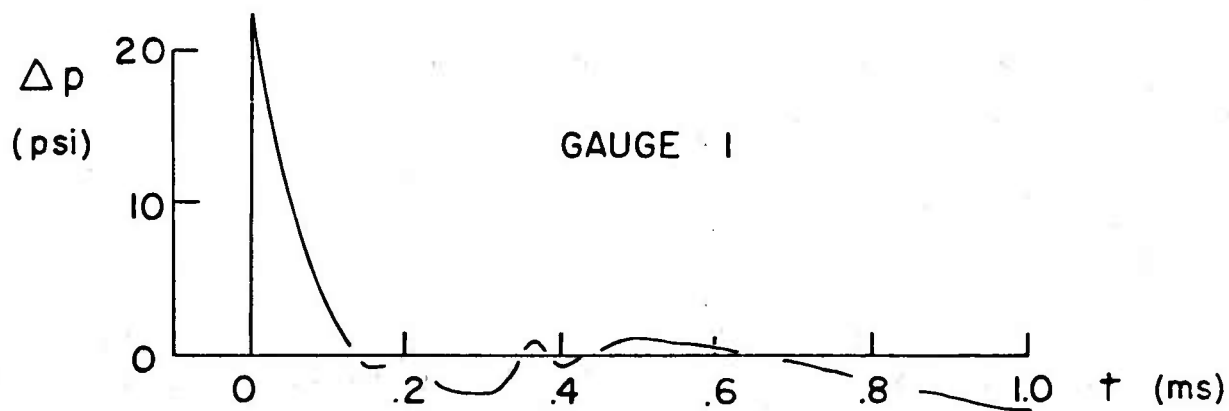
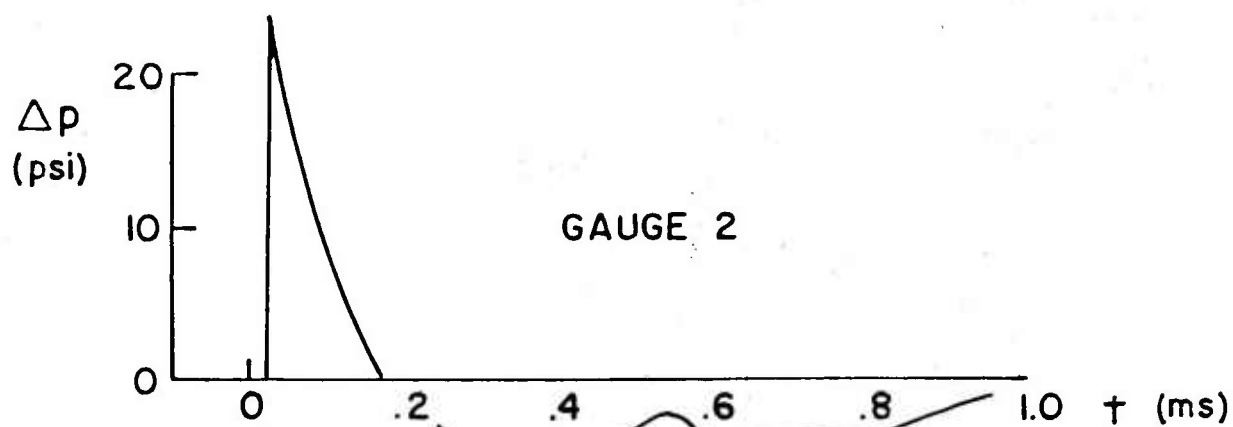


Figure 9. Pressure data, 30 mm, bare muzzle.

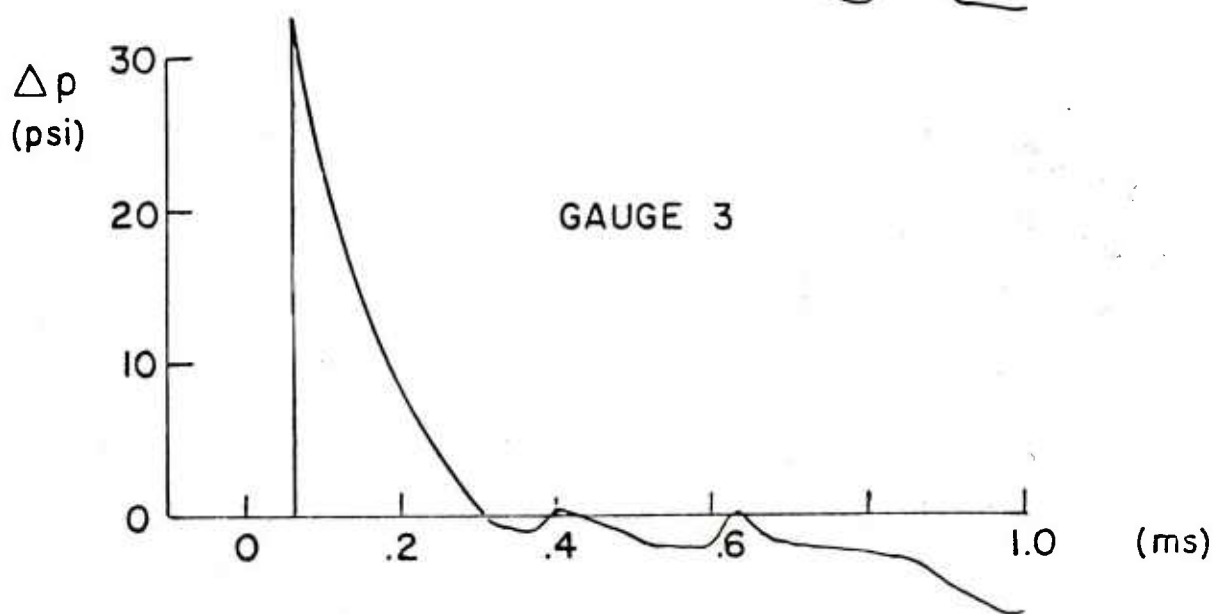
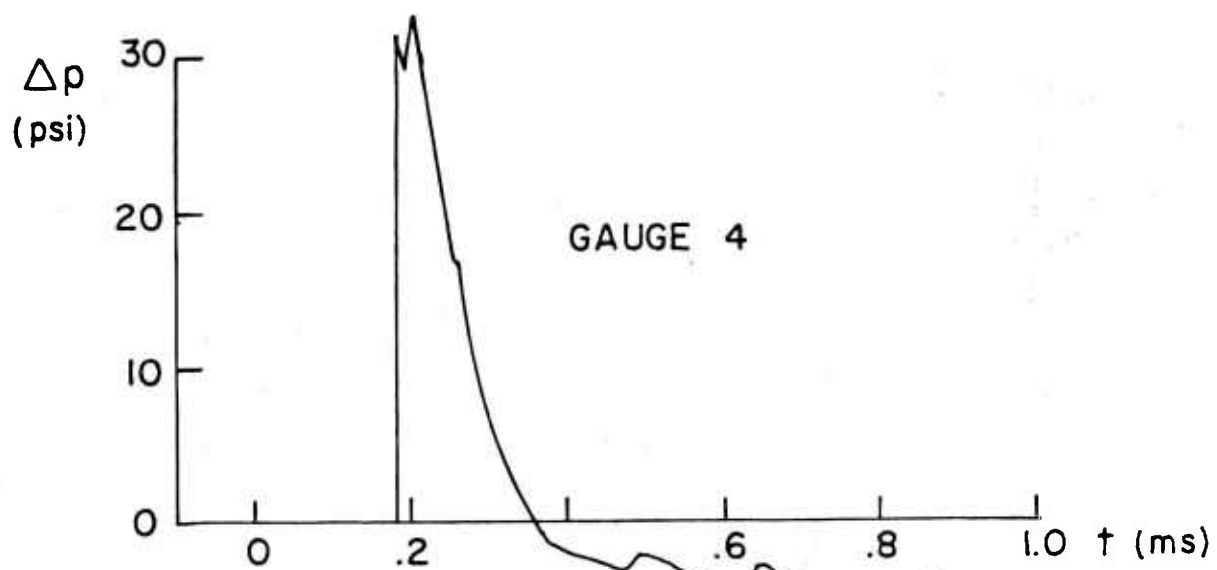


Figure 9. (cont'd). Pressure data, 30 mm, bare muzzle.



Figure 10. Spark shadowgraph of muzzle blast from 30 mm, Chain Gun, with Hughes suppressor.

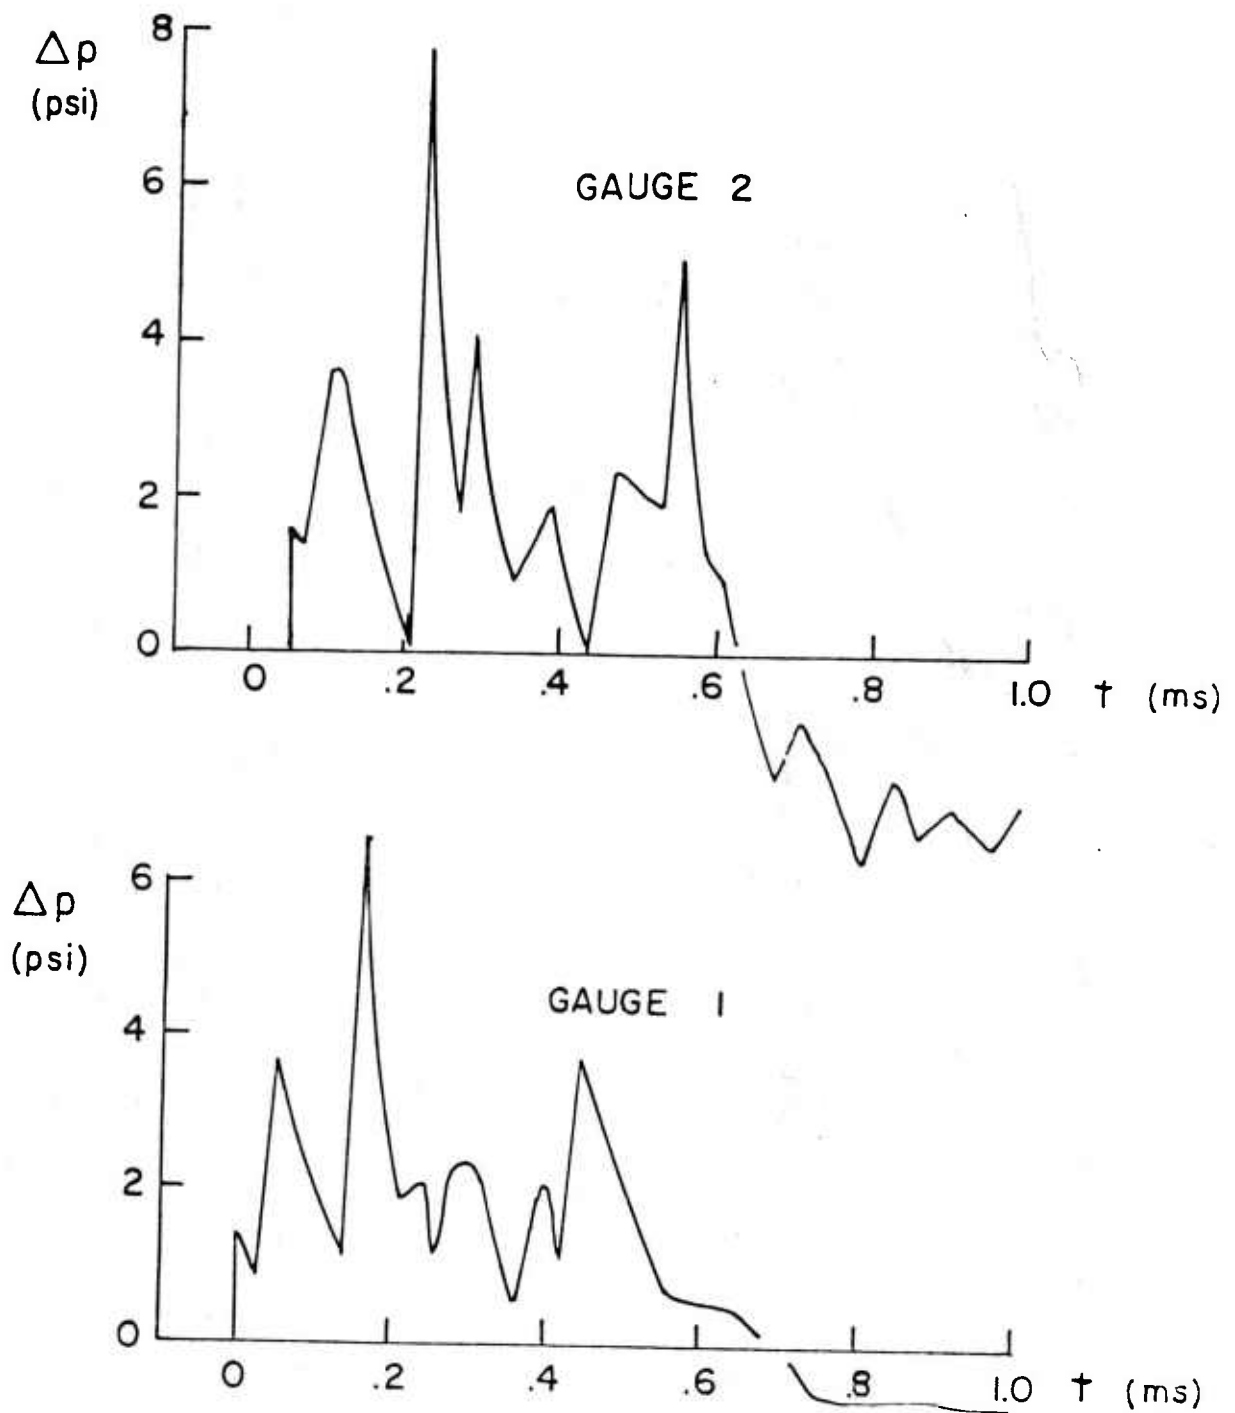


Figure 11. Pressure data, 30 mm, Hughes suppressor.

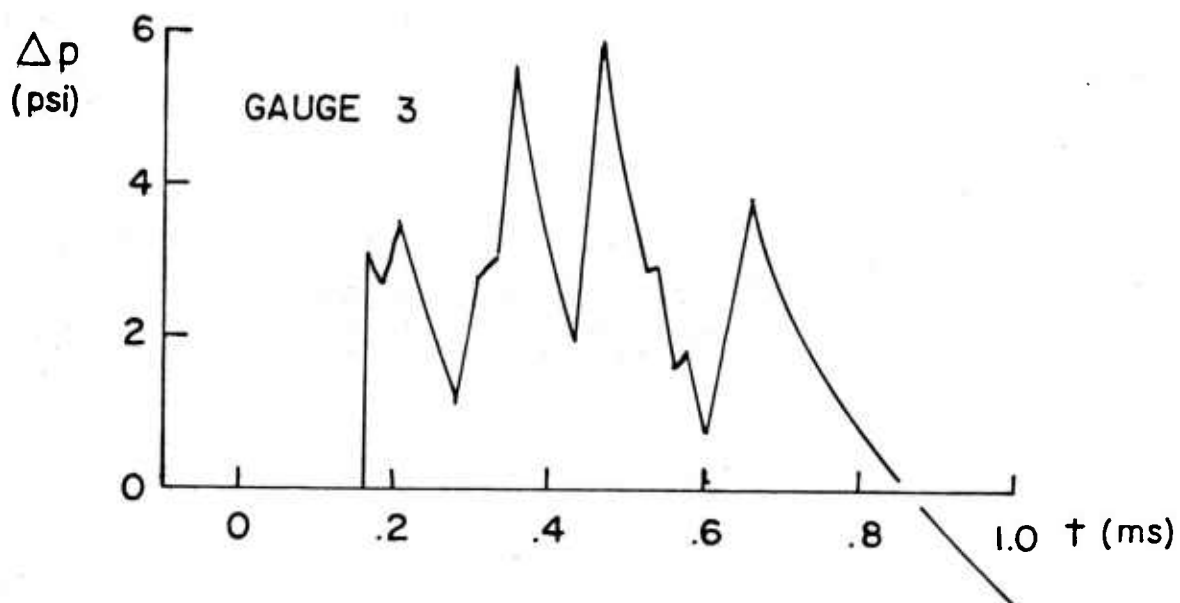
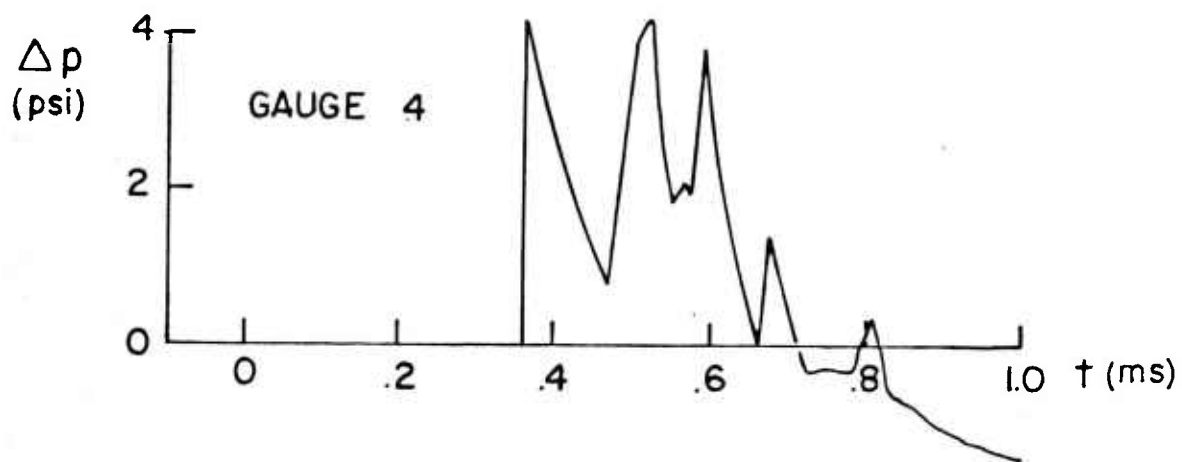


Figure 11. (cont'd). Pressure data, 30 mm, Hughes suppressor.

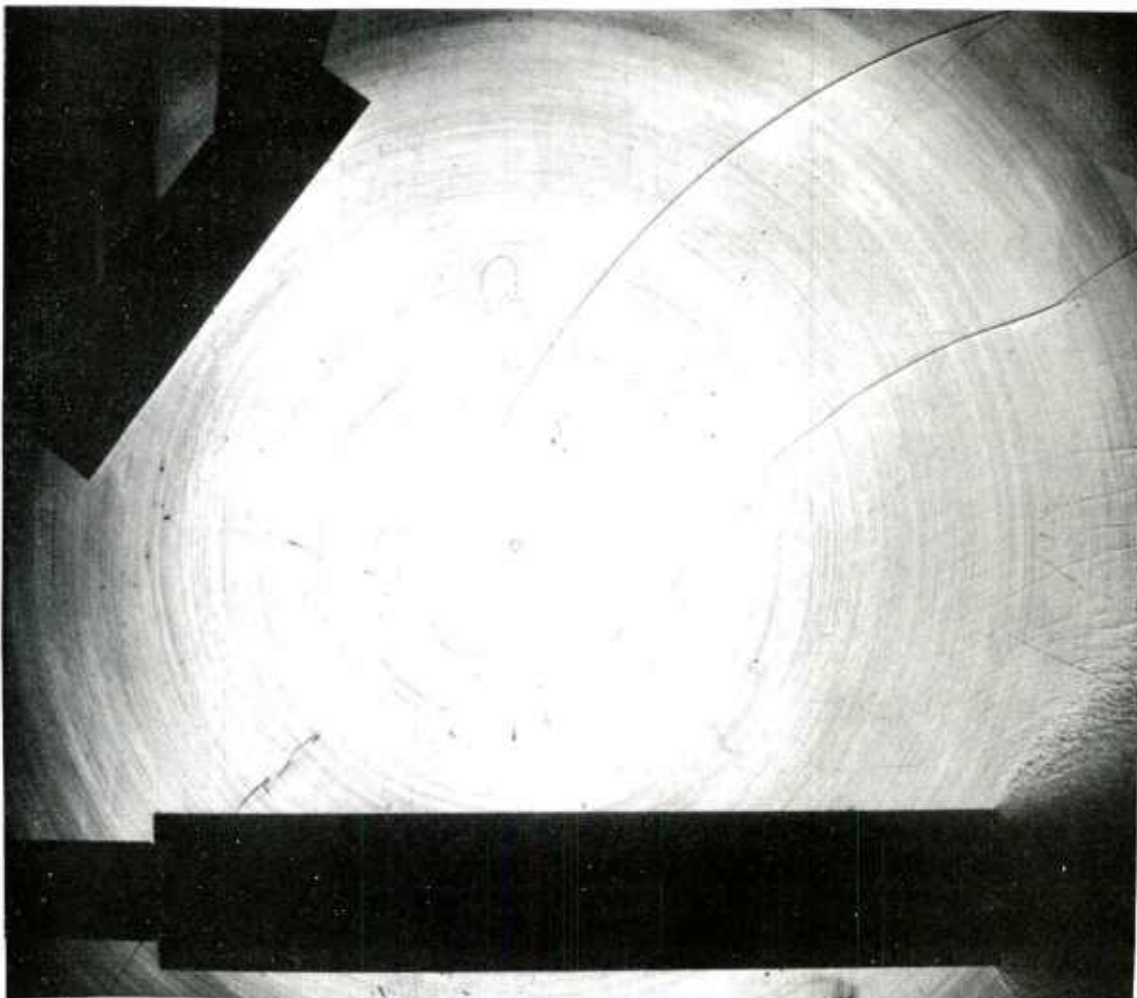


Figure 12. Spark shadowgraph of muzzle blast from 30 mm, Chain Gun, with BRL suppressor.

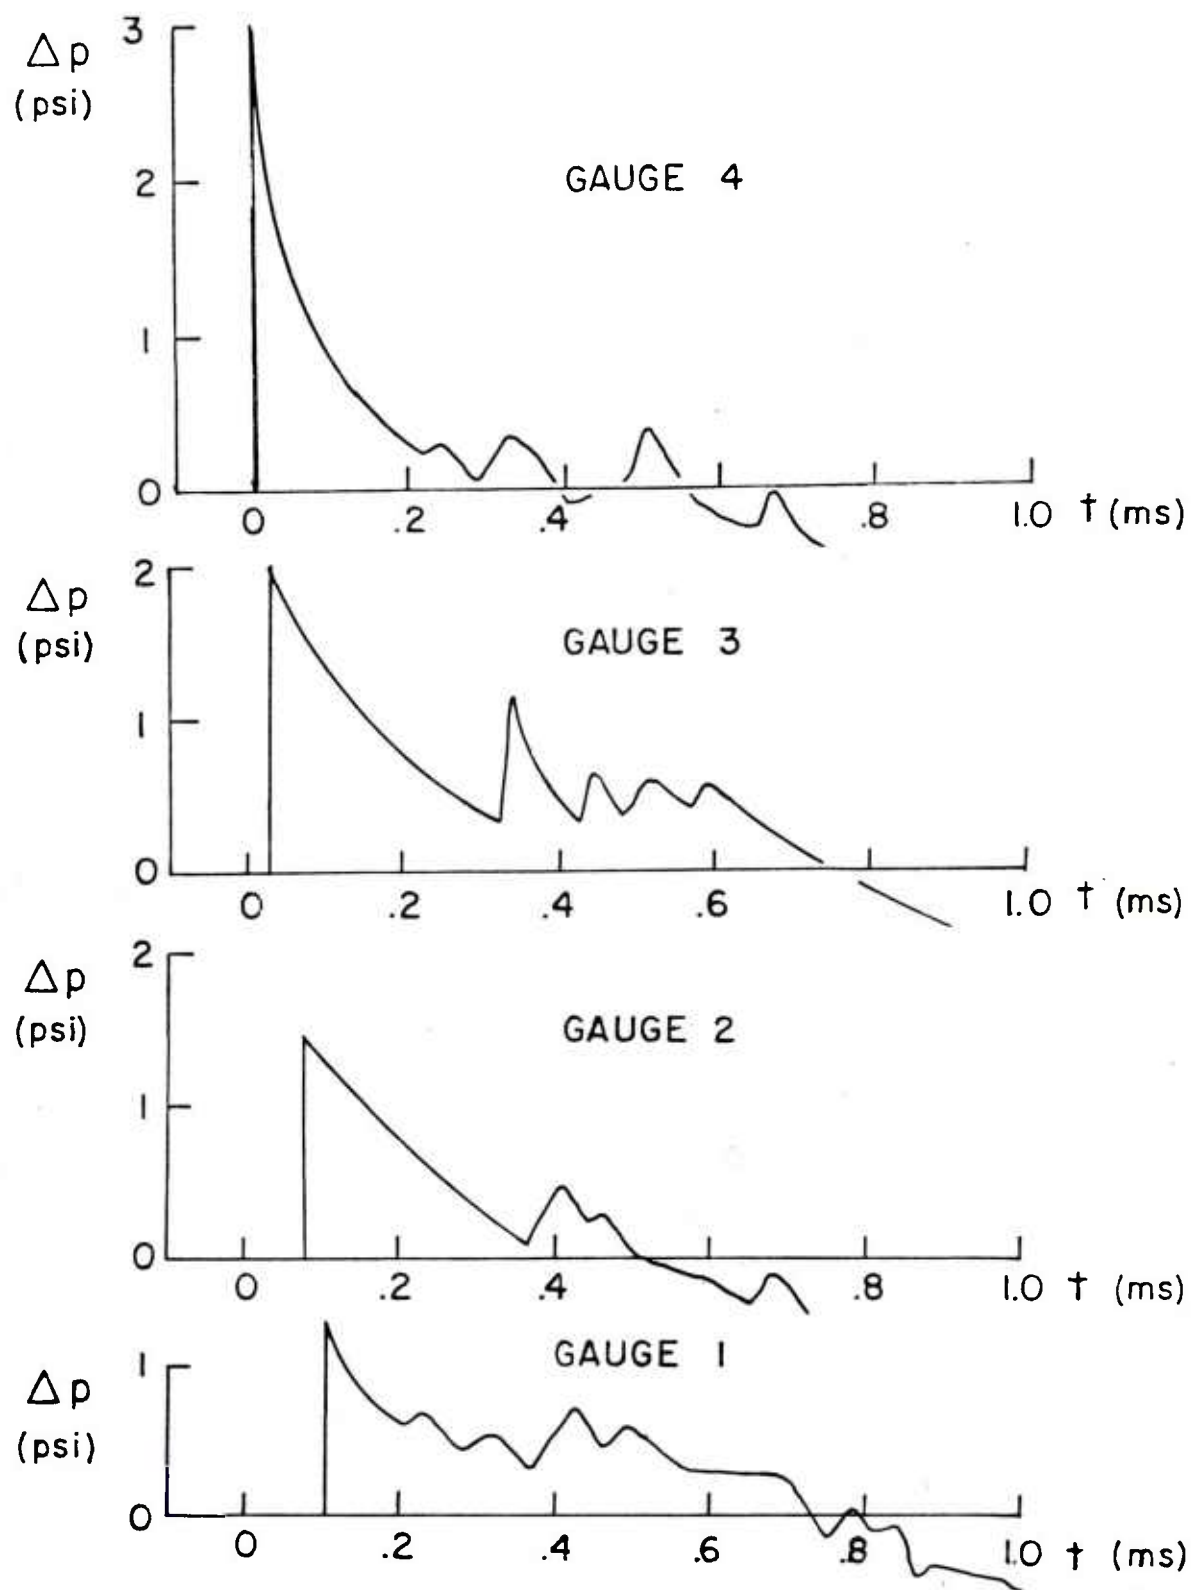


Figure 13. Pressure data, 30 mm, with BRL suppressor.

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
12	Commander Defense Technical Info Center ATTN: DDC-DDA Cameron Station Alexandria, VA 22314	7	Commander US Army Armament Research and Development Command ATTN: DRDAR-TSS (2 cys) DRDAR-TDS, Mr. Lindner DRDAR-TDA, Mr. Blick DRDAR-LC-F, Mr. A. Loeb Mr. E. Friedman DRDAR-SEM W. Bielauskas Dover, NJ 07801
1	Director Defense Nuclear Agency Washington, DC 20305	6	Commander US Army Armament Research and Development Command ATTN: DRDAR-LCV, Mr. Reisman DRDAR-SCN, Mr. Kahn DRDAR-LC, Dr. Frasier DRDAR-SCW, Mr. Townsend DRDAR-SG, Dr. T. Hung PM, XM788/789, LTC Delany Dover, NJ 07801
2	HQDA (DAMA-WSA, MAJ Csoka; DAMA-CSM, LTC Germann) Washington, DC 20310	1	Commander US Army Armament Materiel Readiness Command ATTN: DRSAR-LEP-L, Tech Lib Rock Island, IL 61299
1	Director US Army BMD Advanced Technology Center P. O. Box 1500, West Station Huntsville, AL 35807	6	Director US Army ARRADCOM Benet Weapons Laboratory ATTN: DRDAR-LCB-TL Mr. W. Dock Dr. G. Carofano Mr. P. Alto DRDAR-LCB, Mr. T. Allen Mr. R. Billington Watervliet, NY 12189
1	Commander US Army Ballistic Missile Defense Systems Command Huntsville, AL 35804		
1	ODCSI, USAREUR & 7A ATTN: AEAGB-PDN (S&E) APO, New York 09403		
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCMDM-ST 5001 Eisenhower Avenue Alexandria, VA 22333		
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDL 5001 Eisenhower Avenue Alexandria, VA 22333		

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
3	Commander US Army Aviation Research and Development Command ATTN: DRSAV-E DRCPM-AAH Product Manager, AH-1 P. O. Box 209 St. Louis, MO 63166	1	Commander US Army Tank Automotive Research & Development Cmd ATTN: DRDTA-UL Warren, MI 48090
1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035	1	Commander US Army Jefferson Proving Ground ATTN: STEJP-TD-D Madison, IN 47250
1	Commander US Army Communications Rsch and Development Command ATTN: DRDCO-PPA-SA Fort Monmouth, NJ 07703	1	Commander US Army Materials and Mechanics Research Center ATTN: DRXMR-ATL Watertown, MA 02172
1	Commander US Army Electronics Research and Development Command Technical Support Activity ATTN: DELSD-L Fort Monmouth, NJ 07703	1	Commander US Army Research Office ATTN: CRD-AA-EH P. O. Box 12211 Research Triangle Park NC 27709
5	Commander US Army Missile Command ATTN: DRDMI-R DRDMI-RBL DRDMI-RDK DRDMI-YDL (2 cys) Redstone Arsenal, AL 35809	2	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SL, Tech Lib ATAA-S White Sands Missile Range NM 88002
1	Commander US Army Natick Research and Development Command ATTN: DRXRE, Dr. D. Sieling Natick, MA 01762	3	Commander Naval Air Systems Command ATTN: AIR-604 Washington, DC 20360
		3	Commander Naval Ordnance Systems Command ATTN: ORD-9132 Washington, DC 20360

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
2	Commander and Director David W. Taylor Naval Ship Research & Development Cmd ATTN: Lib Div, Code 522 Aerodynamic Lab Bethesda, MD 20084	1	AFWL/SUL Kirtland AFB, NM 87117
3	Commander Naval Surface Weapons Center ATTN: Code 6X Mr. F. H. Maille Dr. J. Yagla Dr. G. Moore Dahlgren, VA 22448	1	ASD/XRA (Stinfo) Wright-Patterson AFB, OH 45433
1	Commander Naval Surface Weapons Center ATTN: Code 730, Tech Lib Silver Spring, MD 20910	1	Director National Aeronautics and Space Administration George C. Marshall Space Flight Center ATTN: MS-I, Lib Huntsville, AL 38512
1	Commander Naval Weapons Center ATTN: Code 553, Tech Lib China Lake, CA 93555	1	Director Jet Propulsion Laboratory ATTN: Tech Lib 2800 Oak Grove Drive Pasadena, CA 91103
1	Commander Naval Research Laboratory ATTN: Tech Info Div Washington, DC 20375	1	Director National Aeronautics and Space Administration Langley Research Center ATTN: MS 185, Tech Lib Langley Station Hampton, VA 23365
1	Commander Naval Ordnance Station ATTN: Code FS13A, P. Sewell Indian Head, MD 20640	1	Director NASA Scientific & Technical Information Facility ATTN: SAK/DL P. O. Box 8757 Baltimore/Washington International Airport, MD 21240
1	AFRPL/LKCB, Dr. Horning Edwards AFB, CA 93523	1	AAI Corporation ATTN: Dr. T. Stastny Cockeysville, MD 21030
2	AFATL (DLDL, D.C. Daniel; Tech Lib) Eglin AFB, FL 32542		

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Advanced Technology Labs ATTN: Mr. J. Ranlet Merrick & Steward Avenues Westbury, NY 11590	2	General Electric Corporation Armaments Division ATTN: Mr. R. Whyte Mr. J. MacNeil Lakeside Avenue Burlington, VT 05401
1	Aerospace Corporation ATTN: Dr. T. Taylor P. O. Box 92957 Los Angeles, CA 90009	1	Honeywell, Inc. ATTN: Mail Station MN 112190 (G. Stilley) 600 Second Street, North Hopkins, MN 55343
1	ARO, Inc. ATTN: Tech Lib Arnold AFS, TN 37389	3	Hughes Helicopter Company Bldg. 2, MST22B ATTN: Mr. R. Forker Mr. T. Edwards Mr. R. Flood Centinella and Teel Streets Culver City, CA 90230
1	ARTEC Associates, Inc. ATTN: Dr. S. Gill 26046 Eden Landing Road Hayward, CA 94545	1	Martin Marietta Aerospace ATTN: Mr. A. J. Culotta P. O. Box 5387 Orlando, FL 32805
2	AVCO Systems Division ATTN: Dr. W. Reinecke Dr. D. Siegelman 201 Lowell Street Wilmington, MA 01887	1	Winchester-Western Division Olin Corporation New Haven, CT 06504
1	Battelle Columbus Laboratories ATTN: J. E. Backofen, Jr. 505 King Avenue Columbus, OH 43201	1	Rockwell Int'l Science Center ATTN: Dr. Norman Malmuth P. O. Box 1085 1000 Oaks, CA 91360
1	Technical Director Colt Firearms Corporation 150 Huyshope Avenue Hartford, CT 14061	1	Sandia Laboratories ATTN: Aerodynamics Dept Org 5620, R. Maydew Albuquerque, NM 87115
1	Flow Simulations Inc. ATTN: Dr. J. Steger 735 Alice Ave Mountain View, CA 94041	1	S&D Dynamics, Inc. ATTN: Dr. M. Soifer 755 New York Avenue Huntington, NY 11743
1	ARO, Inc. Von Karman Gasdynamics Facility ATTN: Dr. J. Adams Arnold AFS, TN 37389		

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Guggenheim Aeronautical Lab California Institute of Tech ATTN: Tech Lib Pasadena, CA 91104	1	Southwest Research Institute ATTN: Mr. Peter S. Westine P. O. Drawer 28510 8500 Culebra Road San Antonio, TX 78228
1	Franklin Institute ATTN: Tech Lib Race & 20th Streets Philadelphia, PA 19103		<u>Aberdeen Proving Ground</u>
1	Director Applied Physics Laboratory The Johns Hopkins University Johns Hopkins Road Laurel, MD 20810		Dir, USAMSAA ATTN: DRXSY-D DRXSY-MP, H. Cohen Cdr, USATECOM ATTN: DRSTE-TO-F Cdr, USA CSL/EA ATTN: A. Flatau, SAREA-DE-W Bldg. E3516
1	Massachusetts Institute of Technology Dept of Aeronautics and Astronautics ATTN: Tech Lib 77 Massachusetts Avenue Cambridge, MA 02139		Dir, Wpns Sys Concepts Team, Bldg. E3516, EA ATTN: DRDAR-ACW
1	Ohio State University Dept of Aeronautics and Astronautical Engineering ATTN: Tech Lib Columbus, OH 43210		
2	Polytechnic Institute of New York Graduate Center ATTN: Tech Lib Dr. G. Moretti Route 110 Farmingdale, NY 11735		
1	Director Forrestal Research Center Princeton University Princeton, NJ 08540		

USER EVALUATION OF REPORT

Please take a few minutes to answer the questions below; tear out this sheet and return it to Director, US Army Ballistic Research Laboratory, ARRADCOM, ATTN: DRDAR-TSB, Aberdeen Proving Ground, Maryland 21005. Your comments will provide us with information for improving future reports.

1. BRL Report Number _____
2. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which report will be used.)

3. How, specifically, is the report being used? (Information source, design data or procedure, management procedure, source of ideas, etc.) _____

4. Has the information in this report led to any quantitative savings as far as man-hours/contract dollars saved, operating costs avoided, efficiencies achieved, etc.? If so, please elaborate.

5. General Comments (Indicate what you think should be changed to make this report and future reports of this type more responsive to your needs, more usable, improve readability, etc.) _____

6. If you would like to be contacted by the personnel who prepared this report to raise specific questions or discuss the topic, please fill in the following information.

Name: _____

Telephone Number: _____

Organization Address: _____

