

AD-A084 210

HUGHES RESEARCH LABS MALIBU CA
GAAS SURFACE PASSIVATION FOR DEVICE APPLICATIONS.(U)
JAN 80 C L ANDERSON, M D CLARK, J W PETERS

F/6 9/1

F33615-78-C-1444


UNCLASSIFIED

AFAL-TR-79-1234

NL

104
40
10-10-79






MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963-A

ADA084210

AFAL-TR-79-1234

LEVEL

4075-479

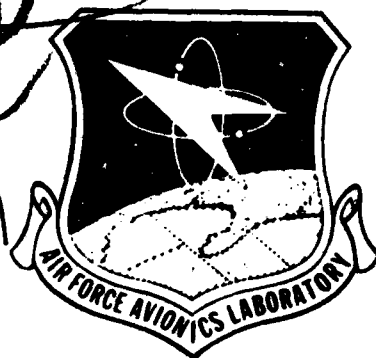

GaAs SURFACE PASSIVATION FOR DEVICE APPLICATIONS

C. L. ANDERSON
M. D. CLARK
J. W. PETERS

HUGHES RESEARCH LABORATORIES
3011 MALIBU CANYON ROAD
MALIBU, CA 90265

DTIC
ELECTE
MAY 9 1980
S D C

JANUARY 1980

TECHNICAL REPORT AFAL-TR-79-1234

Interim Report 2 for period 15 December 1978 through 14 June 1979

Approved for public release; distribution unlimited.

AIR FORCE AVIONICS LABORATORY
AIR FORCE WRIGHT AERONAUTICAL LABORATORIES
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433

FILE COPY


80 5 8 029

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use, or sell any patented invention that may in any way be related thereto.

This report has been reviewed by the Office of Public Affairs (ASD/PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.



ROBERT L. JOHNSON, Capt, USAF
Project Engineer

FOR THE COMMANDER:



PHILIP E. STOVER, Chief
Electronic Research Branch
Avionics Laboratory

"If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization please notify AFWAL/AADR, W-P AFB, OH 45433 to help us maintain a current mailing list".

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
AFAL-TR-79-1234	AD-A084 210	
4. TITLE (and Subtitle)		5. TYPE OF REPORT & PERIOD COVERED
GaAs SURFACE PASSIVATION FOR DEVICE APPLICATIONS		Interim Report No. 2, 15 Dec 1978 - 14 Jun 1979
6. AUTHOR(s)		7. PERFORMING ORG. REPORT NUMBER
G.L. Anderson, M.D. Clark, and J.W. Peters		
8. PERFORMING ORGANIZATION NAME AND ADDRESS		9. CONTRACT OR GRANT NUMBER(s)
Hughes Research Laboratories 3011 Malibu Canyon Road Malibu, CA 90265		F33615-78-C-1444
10. CONTROLLING OFFICE NAME AND ADDRESS		11. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Air Force Avionics Laboratory Air Force Systems Command Wright-Patterson AFB, OH 45433		61102F 2305R181 F.I.
12. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. REPORT DATE
		January 1980 12/24/
		14. NUMBER OF PAGES
		15. SECURITY CLASS (of this report)
		UNCLASSIFIED
		15a. DECLASSIFICATION DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)		
Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUBJECT TERMS		
19. DISTRIBUTION STATEMENT (of this abstract) (if necessary, indicate by block number)		
GaAs photoresistation Photochemical deposition GaAs MIS devices Plasma deposition		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		
This report describes the progress in the second six-month period of a program to develop deposited dielectrics for GaAs device applications. Three applications of the dielectrics are being investigated: (1) isolation of control electrodes; (2) passivation of the GaAs surface; and (3) encapsulation of completed circuits. The dielectrics being studied include silicon oxynitride; mixtures of silicon nitride		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

and germanium nitride; and mixtures of silicon dioxide, gallium oxide, and aluminum oxide.

During this report period, GaAs metal-semiconductor gate field effect transistors were evaluated for microwave gain degradation following encapsulation with a plasma-deposited dielectric. Average gain degradation at 9.70 GHz was 0.5 dB.

Evaluation of plasma-deposited " Ge_3N_4 " films indicated that substantial oxygen contamination can occur even when the deposition system is leak tight. Interactions of the plasma with the walls of the deposition chamber are believed to be responsible. Design of an improved deposition system is described.

Capacitance-voltage (C-V) data for MIS capacitors prepared using several dielectrics prepared by plasma deposition and photochemical deposition are presented. All the C-V curves are nonideal. Several phenomena observed in these C-V data are discussed.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

PREFACE

The work reported here is supported by the Air Force Avionics Laboratory, Wright-Patterson Air Force Base, Ohio, under contract F33615-78-C-1444. The monitoring engineer is Capt. R.L. Johnson. The program objective is to investigate the passivation of gallium arsenide and the application of dielectric thin-film overlayers in metal-insulator-semiconductor field-effect transistors.

This work is being performed jointly by Hughes Research Laboratories and the Technology Support Division of Hughes Aircraft Company. Contributions to this work have been made by C.L. Anderson, M.D. Clark, J.W. Peters, R.A. Jullens, and F.L. Gebhart.

This is the second interim report. The first was published as AFAL-TR-79-1057 with the same title.

Accession For	
NTIS	GRA&I
DDC TAB	
Unannounced	
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A	

TABLE OF CONTENTS

SECTION		PAGE
	LIST OF ILLUSTRATIONS	vi
1	INTRODUCTION AND SUMMARY	1
2	ENCAPSULATION OF GaAs FETs	3
3	PHYSICAL PROPERTIES OF "Ge ₃ N ₄ " FILMS PREPARED BY PED	5
4	ELECTRICAL CHARACTERIZATIONS OF PED AND PCD FILMS	8
5	IMPROVEMENTS IN ANALYTICAL CAPABILITIES	17

LIST OF ILLUSTRATIONS

FIGURE		PAGE
1	Schematic of improved plasma-enhanced-deposition (PED) system	7
2	C-V behavior of an MIS capacitor incorporating a PED SiO_xN_y over PED " Si_3N_4 " dielectric . . .	9
3	C-V behavior of an MIS capacitor incorporating a PED " Si_3N_4 " dielectric prepared for silane and nitrogen	10
4	C-V behavior of an MIS capacitor incorporating a PED " Si_3N_4 " dielectric	11
5	C-V behavior of an MIS capacitor incorporating a PED " Ge_3N_4 " dielectric	12
6	C-V behavior of an MIS capacitor incorporating a PED " Ge_3N_4 " dielectric	13
7	C-V behavior of an MIS capacitor incorporating a photo-chemically deposited " Si_3N_4 " dielectric	14
8	C-V behavior of an MIS capacitor incorporating a photochemically deposited " Si_3N_4 " dielectric annealed at 400°C in forming gas	15

SECTION 1

INTRODUCTION AND SUMMARY

The goal of this program is to develop dielectrics that will serve the following three basic purposes in gallium arsenide device technology:

- Passivation — reduction of the number of electrically active centers ("surface states") at the semiconductor surface so that the surface potential can be modulated by control electrodes ("gates") overlying the dielectric.
- Isolation — insulation of control electrodes from each other and from the substrate.
- Encapsulation — overcoating of operational circuits to reduce their sensitivity to environmental influences.

To serve these three purposes, Hughes Aircraft Company is developing a variety of deposited dielectrics. Techniques for depositing these dielectric materials are being developed under Hughes internal funding. Evaluation and optimization of these materials for GaAs device applications are being performed under the subject contract.

The following materials are being developed:

- $\text{Ga}_x\text{Al}_y\text{O}_z$ (gallium-aluminum oxide), referred to as $(\text{Ga},\text{Al})\text{O}$
- $\text{Ga}_x\text{Si}_y\text{O}_z$ (gallium-silicon oxide), or $(\text{Ga},\text{Si})\text{O}$
- $\text{Al}_x\text{Si}_y\text{O}_z$ (gallium-silicon oxide), or $(\text{Ga},\text{Si})\text{O}$
- $\text{Al}_x\text{Si}_y\text{O}_z$ (aluminum-silicon oxide), or $(\text{Al},\text{Si})\text{O}$
- SiO_xN_y (silicon oxynitride)
- $(\text{Si},\text{Ge})\text{N}$ (silicon-germanium nitride).

Three basic techniques for depositing these materials are being evaluated:

- Pyrolytic chemical vapor deposition (CVD)
- Plasma-enhanced deposition (PED)
- Photochemical deposition (PCD).

During this report period, an evaluation of our proprietary plasma-deposited isolation glass as an encapsulant for GaAs-microwave FETs was performed under Hughes internal funding. The average gain degradation resulting from encapsulation was only 0.5 dB at 9.7 GHz. Because of the success of this material as both an isolation glass and an encapsulant, we have shifted our emphasis toward passivation studies.

In our continuing work on the (Si,Ge)N system, physical characterization of " Ge_3N_4 " films prepared by PED showed that plasma-induced desorption from the chamber walls contributes significantly to oxygen contamination in these films. Construction of a new PED system designed to reduce this and other problems has begun under Hughes internal funding.

An evaluation of the electrical interface properties of a variety of dielectrics prepared by PED and PCD was begun during this report period. PED SiO_xN_y (with intentional oxygen doping) showed strong "pseudo-inversion" (i.e., a tendency for the capacitance of MIS capacitors under depletion conditions to saturate at an unexpectedly high capacitance value). PED " Si_3N_4 " and " Ge_3N_4 " exhibited stable deep depletion, a condition believed to be maintained by insulator leakage. PCD " Si_3N_4 " exhibited very flat MIS capacitance-voltage (C-V) behavior in accumulation and possible "pseudo-inversion."

SECTION 2

ENCAPSULATION OF GaAs FETs

Using Hughes internal funding, we performed an initial study of the usefulness of our proprietary plasma-deposited isolation glass as an encapsulating material. Four microwave GaAs FETs with $1 \times 600 \mu\text{m}$ gates and mounted in NEC carriers were evaluated for microwave gain at 9.70 GHz before and after deposition of the dielectric glass. The results are presented in Table 1. On the basis of the four measurements on each device, the average gain degradation resulting from encapsulation was 0.45 dB. In view of the increased parasitic capacitance resulting from the presence of the glass, we feel this reduction in gain is very reasonable. Thus, our plasma-deposited dielectric is at least superficially useful for encapsulation. As indicated in Interim Report 1, this same glass has for some time also been routinely used to isolate clock lines in all of our GaAs ICs. Because of the success of this material in isolation and passivation applications, we have shifted our emphasis on this program toward passivation, the most challenging use of dielectrics in GaAs device applications.

TABLE 1. Response of GaAs FETs to Encapsulation

Device No.	Gate Bias, V	Drain Bias, V	Drain Current, mA	Input Power, dBm	Unencapsulated Gain at 9.70 GHz, dB	Encapsulated Gain, dB	Gain Change, dB
1	-3.05	5.0	50	0	8.25	7.1	-1.15
	-1.62	5.0	90	+10	7.6	6.9	-0.7
2	-2.91	5.0	50	0	9.05	7.75	-1.3
	-1.56	5.0	90	+10	7.3	7.6	+0.3
3	-3.42	5.0	50	0	7.95	7.4	-0.55
	-2.02	5.0	90	+10	7.55	7.3	-0.25
4	-3.5	5.0	50	0	7.55	7.4	-0.15
	-1.96	5.0	90	+10	7.35	7.3	-0.05

6814

SECTION 3

PHYSICAL PROPERTIES OF " Ge_3N_4 " FILMS PREPARED BY PED

The initial films of " Ge_3N_4 " prepared by PED (and described in AFAL-TR-79-1057) were found to be both germanium rich and oxygen contaminated. The best composition achieved was ~ 77 at.% Ge, 19 at.% O, 4 at.% N. Part of the oxygen contamination was traced to a vacuum leak in the system. Films prepared after the leak had been repaired, however, still exhibited substantial oxygen contamination. Thus, the oxygen contamination appears to result only partially from vacuum leaks.

Additional oxygen apparently results from the action of the plasma on the surface within the deposition chamber, as a result of sputtering, heating, or optically excited desorption. The observed dependence of the dielectric constant of the films on rf power is taken as evidence of this desorption effect. Three " Ge_3N_4 " depositions were performed with constant gas flow conditions (10 sccm of 1.5% GeH_4 in Ar; 40 sccm of N_2) at a constant substrate temperature of 200°C . The rf power was varied from run to run. Films deposited with an rf power of 28 W exhibited an index of refraction (as measured by ellipsometry with $6328\text{-}\text{\AA}$ -wavelength light) of 1.87, whereas films prepared at rf powers of 70 and 300 W exhibited indices of 1.78 and 1.47, respectively. Amorphous pyrolytic Ge_3N_4 exhibits an index of 2.06, while amorphous GeO_2 has an index of about 1.6. Thus, the variation of the refractive index of our PED " Ge_3N_4 " films is assumed to result from oxygen contamination that increases with rf power. Density changes may also be a contributing factor. Similar variations are seen for " Si_3N_4 " prepared by PED.

These considerations indicate why higher N_2 flow rates are not notably effective in reducing oxygen contamination. Higher flow rates without corresponding increases in pumping speed result in higher chamber pressures and therefore require higher rf powers to maintain stable discharges.

The quality of the PED films prepared for this contract should significantly improve when construction of the new PED system shown

in Figure 1 is completed. This system is being built using Hughes internal funding. We believe that the design of this system is significantly better than that of the present system (described in AFAL-TR-79-1057). In the new system, the reducing gases (silane, germane, etc.) are introduced through a side port, rather than through a tube passing down the axis on the rf coil. This arrangement reduces the amount of surface area in the most intensely excited region of the plasma and precludes the possibility of a plasma being generated within the delivery tube for the reducing gases.

The dispersal ring for the reducing gases is attached to a bellows assembly and is capable of oscillating in both horizontal axes over the heater assembly. The heater assembly itself is capable of rotation. We believe that the use of these mechanical motions will result in very uniform deposition over large areas. The sample holder assembly is 16 cm in diameter and is capable of holding four 5-cm-diameter circular wafers.

The sample holder itself is a plate that can be lifted off the heater using a lifting ring controlled by a push-pull/rotary feedthrough and removed from the system through an access door (not shown) in the front of the chamber. During pumpdown, the sample holder can be positioned away from the heater to maintain a low sample temperature. Once high-vacuum conditions are achieved, the samples can be rapidly heated to deposition temperature by placing the sample holder plate onto the heater assembly. This provision reduces the possibility of baking contaminants onto the sample surface prior to deposition.

A mechanical shutter is provided to permit covering the sample during any "preburn" procedure used to outgas the chamber before deposition. The central chamber itself is a large sphere to reduce outgassing of the walls resulting from the proximity to the heater assembly.

During a typical deposition cycle, the system will be evacuated to high vacuum conditions ($<10^{-5}$ mm Hg, or 10^{-3} Pa) before reactive gases are introduced. The diffusion pump will then be valved off and the actual depositions performed under evacuation by a large-capacity rotary

pump protected by a vacuum particle filter. All gas flow rates will be controlled by mass flow controllers. Deposition pressure will be monitored by two capacitance manometer absolute pressure gauges. Because the accuracy of these gauges degrades after numerous depositions, a reference gauge which is valved off during deposition cycles has been provided. It will be used to calibrate the "working" gauge prior to each day's runs.

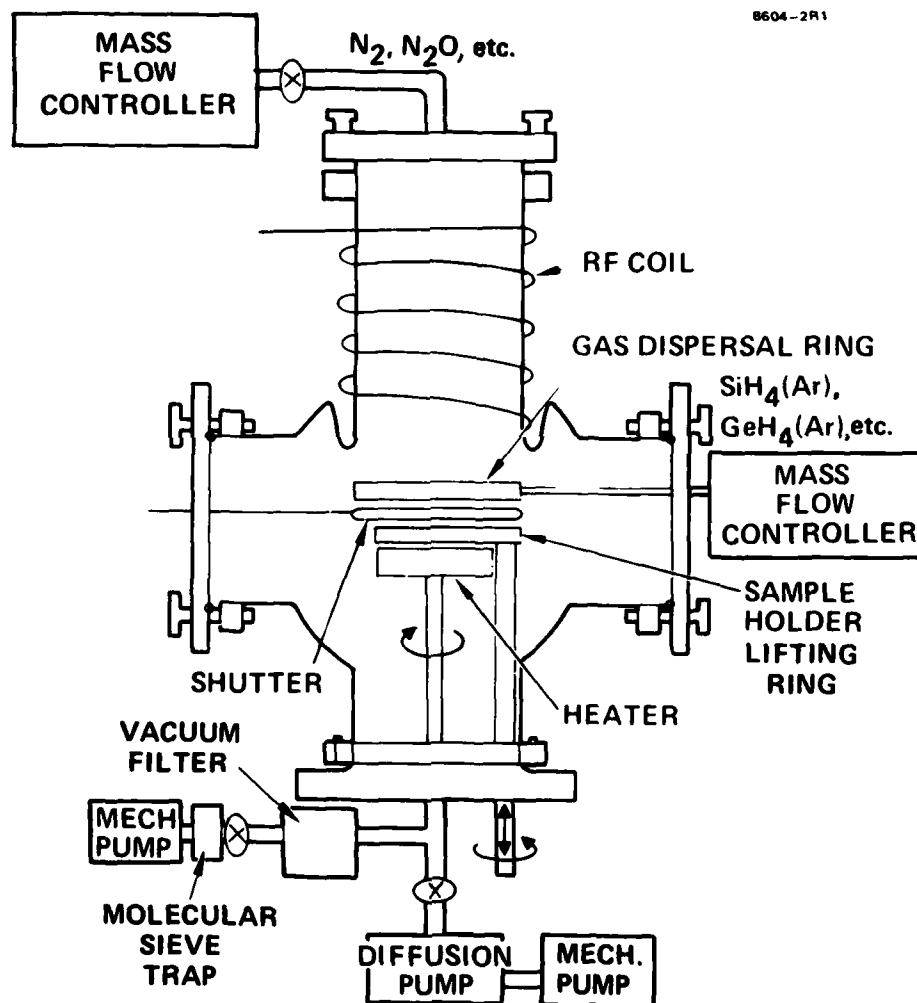


Figure 1. Schematic of improved plasma-enhanced-deposition (PED) system.

SECTION 4

ELECTRICAL CHARACTERIZATIONS OF PED AND PCD FILMS

During this report period, we performed ac C-V analysis on MIS capacitors incorporating a variety of dielectrics. These dielectrics included silicon oxynitride (SiO_xN_y) intentionally doped with oxygen and prepared from silane, nitrogen, and nitrous oxide by PED; PED " Si_3N_4 " prepared from silane and nitrogen; PED " Si_3N_4 " prepared from silane, nitrogen, and hydrogen; PED " Ge_3N_4 " prepared from germane and nitrogen; and PCD " Si_3N_4 " prepared from silane and ammonia.

Representative C-V characteristics are presented in Figures 2 through 8. Data on the fabrication process and sample parameters are provided with each figure. Insulator thicknesses were determined by Tolansky interferometry alone or in conjunction with ellipsometry using 6328-Å light.

All the C-V characteristics exhibit substantial hysteresis and frequency dispersion, which preclude any meaningful quantitative analysis of surface-state densities. There are, however, qualitative differences between the characteristics of the various dielectrics. One form of behavior that varies dramatically in its intensity between the various films is "pseudo-inversion." If we take the insulator capacitance C_i to be the maximum observed capacitance (as would be the case if strong accumulation is obtained), then we can calculate the inversion capacitance C_{inv} from the doping density in the substrate. Under the bias polarity that tends to produce depletion, some samples exhibit a region of essentially constant capacitance at a capacitance considerably greater than C_{inv} over a substantial range of bias voltages. We call this phenomenon, which is evidently the result of a high density of surface states, "pseudo-inversion." This phenomenon is clearly evident in the case of the PED SiO_xN_y over " Si_3N_4 " samples, as shown in Figure 2.

In the case of the PED " Si_3N_4 " samples (Figures 3 and 4), a steady-state capacitance lower than C_{inv} can be achieved, indicating that a stable deep depletion condition can be achieved. Such a situation can be

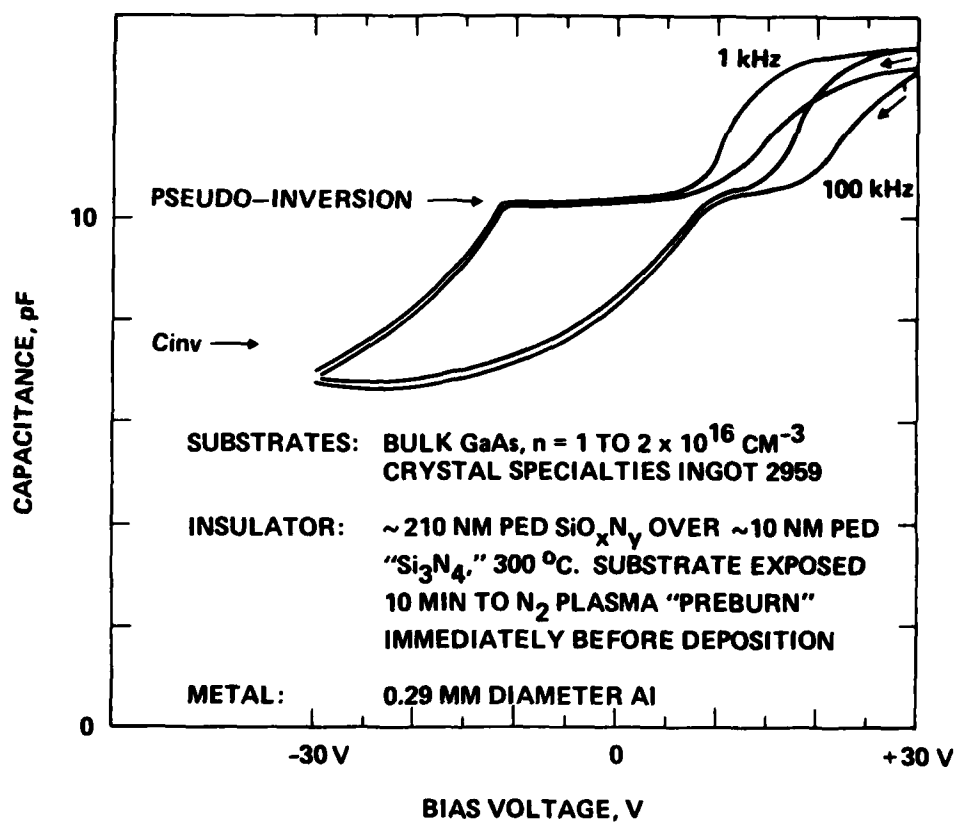


Figure 2. C-V behavior of an MIS capacitor incorporating a PED SiO_xN_y over PED " Si_3N_4 " dielectric.

SUBSTRATE: BULK GaAs, $n = 1 \text{ TO } 2 \times 10^{16} \text{ CM}^{-3}$.
CRYSTAL SPECIALTIES INGOT 2959

INSULATOR: 112 NM OF PED " Si_3N_4 ," 300 °C.
SUBSTRATE EXPOSED 10 MIN TO N_2
PLASMA PREBURN IMMEDIATELY
BEFORE DEPOSITION

METAL: 0.29 MM DIAMETER Al

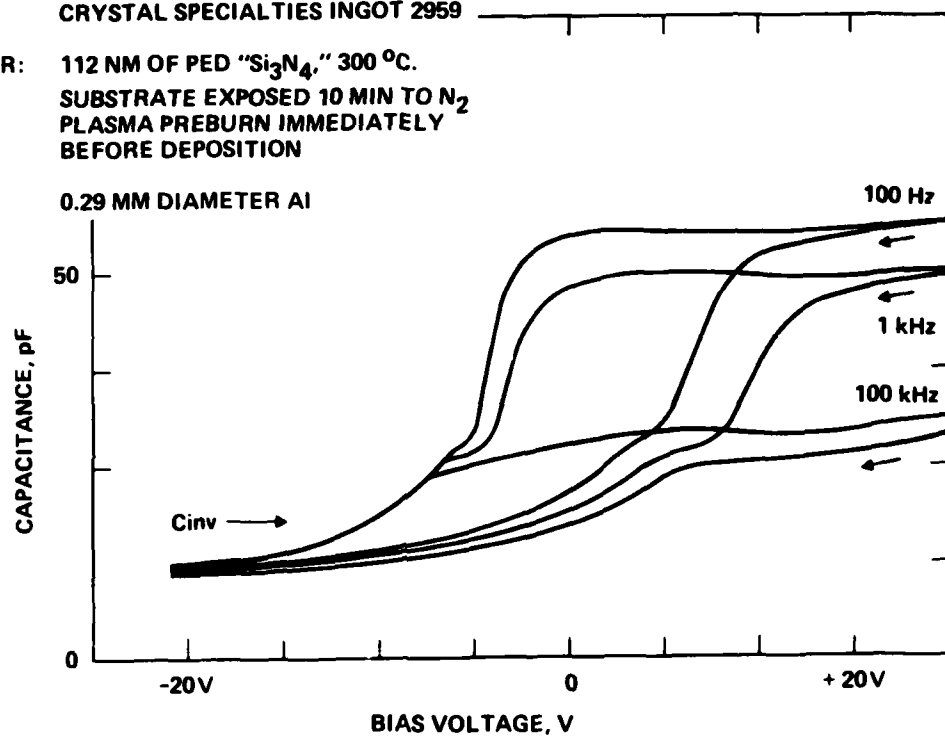


Figure 3. C-V behavior of an MIS capacitor incorporating a PED " Si_3N_4 " dielectric prepared from silane and nitrogen.

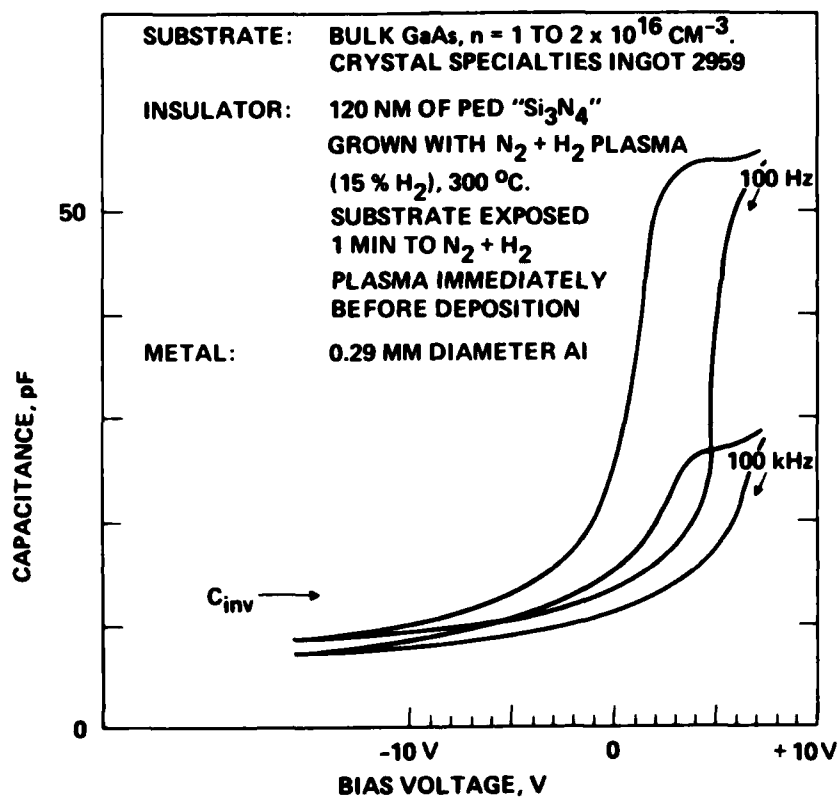


Figure 4. C-V behavior of an MIS capacitor incorporating a PED " Si_3N_4 " dielectric prepared from silane, nitrogen, and hydrogen.

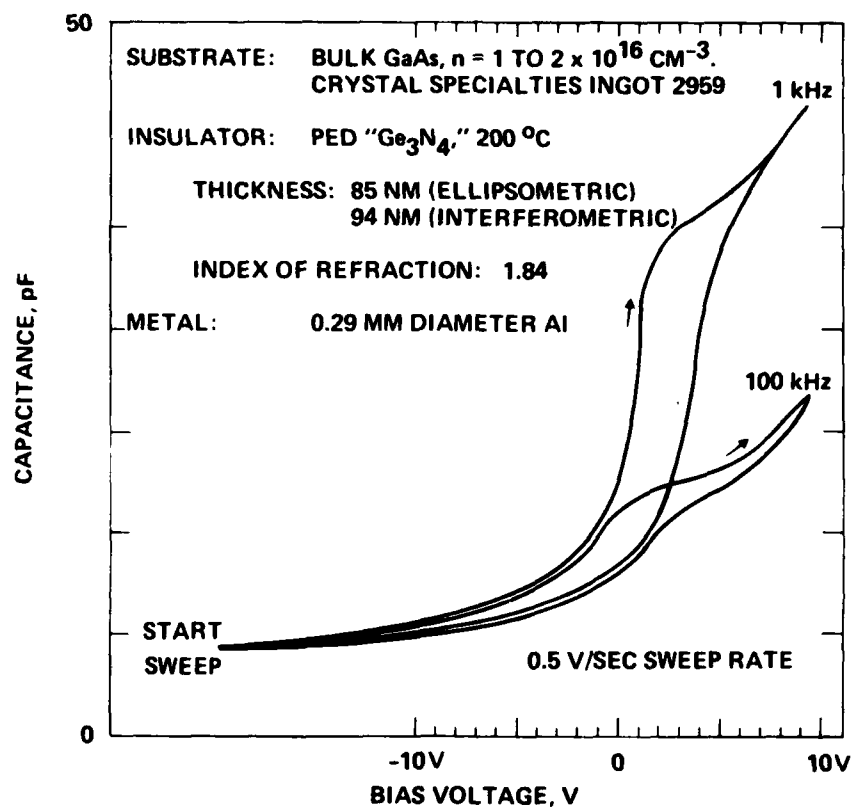


Figure 5. C-V behavior of an MIS capacitor incorporating a PED "Ge₃N₄" dielectric.

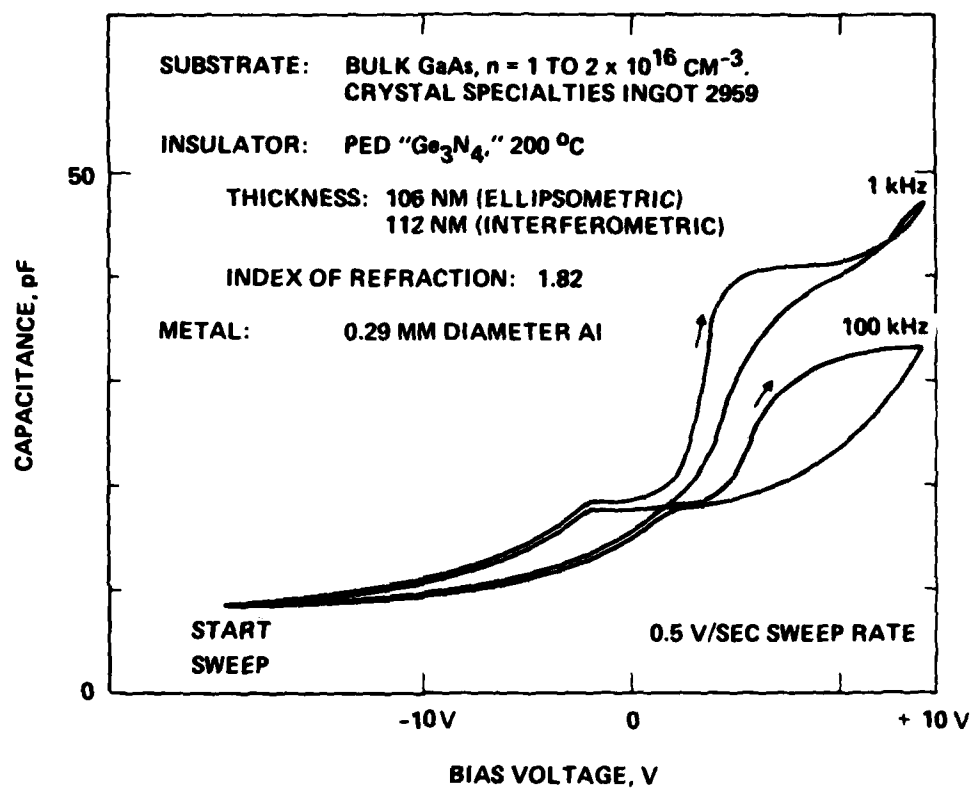


Figure 6. C-V behavior of an MIS capacitor incorporating a PED "Ge₃N₄" dielectric.

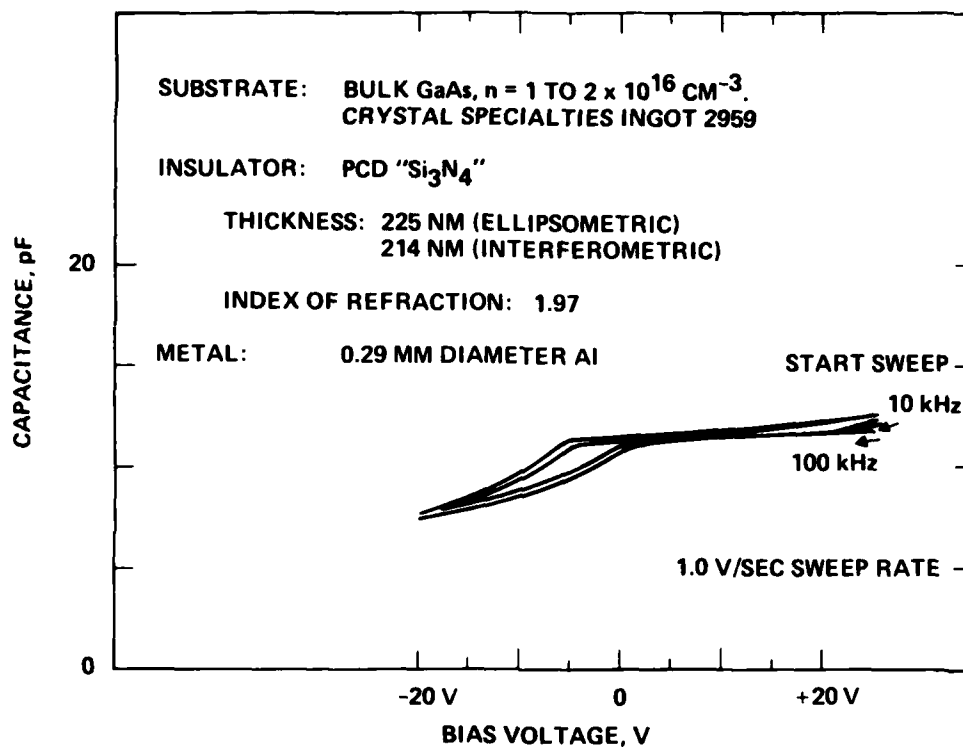


Figure 7. C-V behavior of an MIS capacitor incorporating a photo-chemically deposited " Si_3N_4 " dielectric.

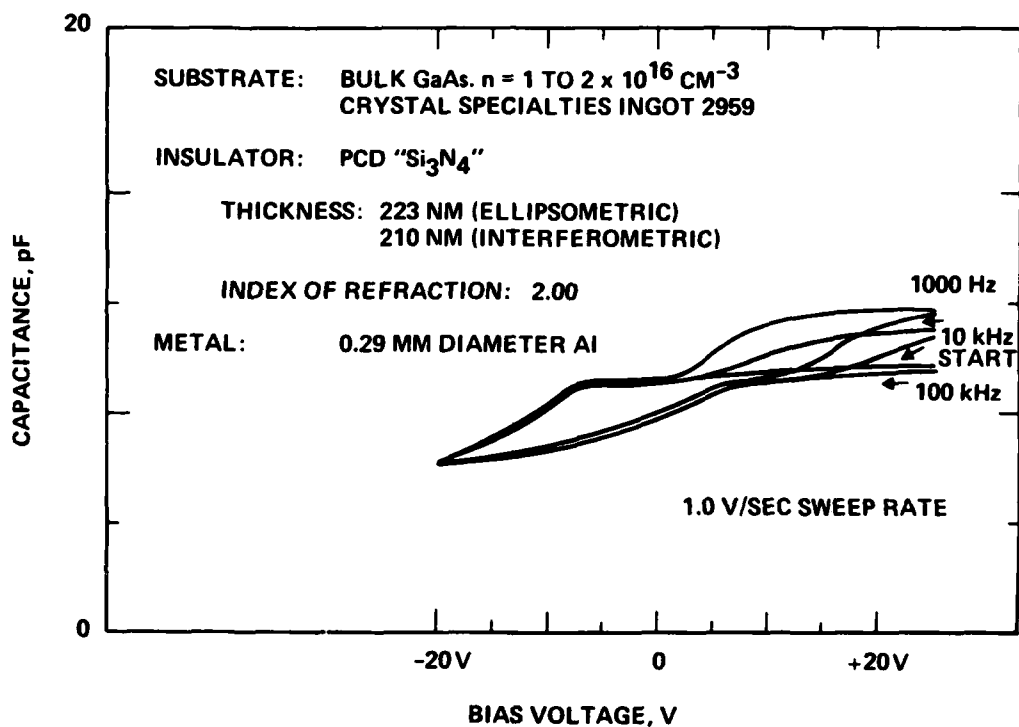


Figure 8. C-V behavior of an MIS capacitor incorporating a photo-chemically deposited " Si_3N_4 " dielectric annealed at 400°C in forming gas.

maintained only if minority carriers are prevented from accumulating at the insulator-semiconductor interface. The " Si_3N_4 " is considerably more conductive than the SiO_xN_y . Inversion may be prevented by the conduction of holes through the nitride layer. The relative weakness of "pseudo-inversion" in the nitride samples indicates that either the surface state density configuration is different or that conduction through the insulator is affecting the surface state occupancy.

Dielectric constants deduced for the PED SiO_xN_y and PED " Si_3N_4 " prepared without hydrogen are $5.1 \epsilon_0$ and $8.5 \epsilon_0$, respectively. The measured C_1 and thickness values for the PED " Si_3N_4 " grown with added hydrogen imply a dielectric constant of $11.1 \epsilon_0$, suggesting that the film is probably Si rich.

C-V characteristics for two PED " Ge_3N_4 " films are presented in Figures 5 and 6. The " Ge_3N_4 " films exhibit sufficient conductance to prevent measuring the C-V behavior under accumulation biases at 100 Hz. Significant frequency dispersion occurs, but the hysteresis in these films is moderate compared to the PED " Si_3N_4 " films. Deep depletion without evidence of inversion is observed. This may be due to the presence of conduction through the dielectric.

The PCD " Si_3N_4 " films (Figures 7 and 8) exhibit very weak voltage dependence of the C-V characteristic under accumulation bias conditions. Only minor improvements in their C-V behavior were obtained following 400°C anneal in forming gas. The C-V curves for both PCD " Si_3N_4 " films exhibit flat regions near zero bias that appear to represent "pseudo-inversion." Thus, it appears that the surface state densities in these films are high.

SECTION 5

IMPROVEMENTS IN ANALYTICAL CAPABILITIES

A Gaertner L116 Automatic Ellipsometer operating at 6328 Å optical wavelength was acquired during this reporting period. It has been used for film thickness and refractive index measurements and will also be used for characterizing substrate cleaning procedures.

A Hewlett-Packard 4275A variable frequency (10 kHz to 10 MHz) LCR meter has been ordered and will be installed in our calculator-based data acquisition system to perform computer-controlled C-V characterization of films prepared for this contract.

FILMED
— 8