

LEVEL

120

ADA 085718

SPECIAL PUBLICATION ARBRL-SP-00017

STANDARDIZATION OF MUZZLE BLAST
OVERPRESSURE MEASUREMENTS

James Patterson
George A. Coulter
Joel Kalb
George Garinther
Benjamin Mozo
Edmund Gion
George Teel
W. Scott Walton

April 1980

STANDARD
RECORDS



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
BALLISTIC RESEARCH LABORATORY
ABERDEEN PROVING GROUND, MARYLAND

FILE COPY


Approved for public release; distribution is unlimited.

Destroy this report when it is no longer needed.
Do not return it to the originator.

Secondary distribution of this report by originating
or sponsoring activity is prohibited.

Additional copies of this report may be obtained
from the National Technical Information Service,
U.S. Department of Commerce, Springfield, Virginia
22151.

DISCLAIMER NOTICE

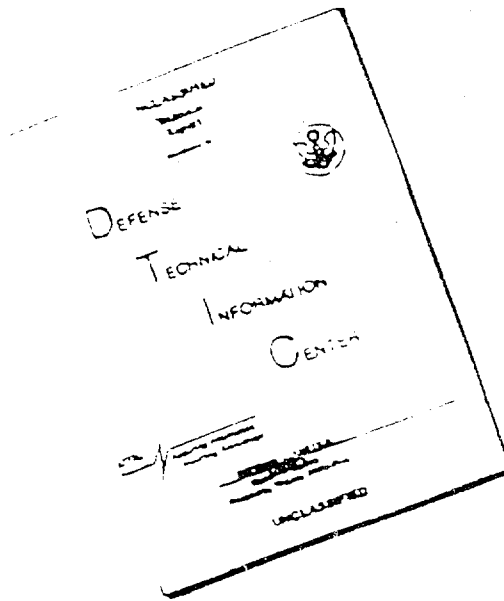

THIS DOCUMENT IS BEST
QUALITY AVAILABLE. THE COPY
FURNISHED TO DTIC CONTAINED
A SIGNIFICANT NUMBER OF
PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Special Publication ARBRL-SP-00014	2. GOVT ACCESSION NO. AD-A085718	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) STANDARDIZATION OF MUZZLE BLAST OVERPRESSURE MEASUREMENTS	5. TYPE OF REPORT & PERIOD COVERED Final	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) James Patterson, USAARL George A. Coulter, Joel Kalb, USAHEL Georges Garinther, USAHEL, Benjamin Mozo, USAARL Edmund Gion, George Teel, W. Scott Walton, MTD	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Ballistic Research Laboratory ATTN: DRDAR-BLT Aberdeen Proving Ground, MD 21005	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 8 1L16261BAH80	
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Armament Research & Development Command U.S. Army Ballistic Research Laboratory (DRDAR-BL) Aberdeen Proving Ground, MD 21005	12. REPORT DATE April 1980	13. NUMBER OF PAGES 18
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) UNCLASSIFIED	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release: distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Blast Proof Testing Instrumentation Standard Measurements Muzzle Blast Transducers Overpressure		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report details the findings and recommendations of the working group concerning test procedures, instrumentation, and reporting guide for muzzle blast overpressure measurements. The recommendations will enable test directors to correlate data at different sites of proof testing.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT

OF

The Working Group for the Standardization of Muzzle
Blast Overpressure Measurements
December 4 - 6, 1979

The Ad Hoc Sub Group for Blast Overpressure
of the Army Science Board

Accession For	
NTIS GRA&I	☒
DDC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A	

TABLE OF CONTENTS

	Page
I. INTRODUCTION	7
II. BACKGROUND	7
III. PROPOSED STANDARIZED TECHNIQUES	9
A. Test Layout and Measurements	9
B. Transducer Specifications	10
C. Transducer Calibration	10
D. Recording Equipment Specifications	11
E. Data Processing	11
F. Data Report	11
IV. EVALUATION OF DATA AND TECHNIQUES	12
V. RECOMMENDATIONS	13
BIBLIOGRAPHY	15
DISTRIBUTION LIST	17

PRECEDING PAGE BLANK-NOT FILMED

I. INTRODUCTION

Reference is made to: "Memorandum for Dr. J. Ernest Wilkins, Jr., Chairman, Army Science Board". Subject: Terms of Reference for Blast Overpressure Ad Hoc Sub Group. Dated 14 November 1979 and signed by Percy A. Pierre, Assistant Secretary of the Army.

In response to the referenced memorandum a meeting was held at the U.S. Army Materiel Systems Analysis Activity (AMSAA), Aberdeen Proving Ground, MD, on 26 November 1979. This meeting was called by Dr. Ben Cummings, AMSAA and Mr. George Kahl, BRL to discuss the Army Blast Overpressure Program in general and the M198 155 mm Howitzer blast overpressure problems in particular. A list of the attendees at this meeting is attached. During this meeting Dr. George Kahl appointed a working group to review the instrumentation techniques and procedures currently employed in the measurement of blast overpressure in the Army, to propose standardized techniques for future use, to evaluate existing data on the M198, and to make recommendations regarding additional blast overpressure testing that might be required or desirable for the M198. The members appointed to this working group were:

George Coulter	BRL	A283-4911
Scott Walton	MTD	A283-2313
Joel Kalb	HEL	A283-3265
Ed Gion	BRL	A283-2914
James Patterson	USAARL	A558-4408
Ben Mozo	USAARL	A558-4408
George Teel	BRL	A283-3301
Georges Garinther	HEL	A283-3265

II. BACKGROUND

The blast overpressure fields around artillery weapons, as a result of muzzle blast, are quite complex. Various components of the total blast wave can arrive at a particular point in space from a number of directions over and above the muzzle location itself. Blast wave reflections can be generated by the muzzle blast reflecting from the ground plane, the gun carriage, trails, fragment shields, or other nearby vehicles. All of these various reflections might arrive at various locations such as within the crew area at different times and from different directions. The problem can be further complicated by variations in muzzle brake and gun tube elevation (QE).

During the 26 November 1979 meeting MAJ Leibrecht, U.S. Army Medical Research and Development Command (USAMRDC), stated that the blast parameter of interest to the Surgeon General was side-on or incident

PRECEDING PAGE BLANK-NOT FILMED

blast overpressure. Because of the multi-directional nature of the complex waveform resulting from muzzle blast, particularly in potential crew areas, an overall incident pressure-time history measurement is not possible. No pressure transducer exists which can make such a measurement. The best that can be hoped for is that one could predict the direction from which one might expect the highest incident overpressure and position transducers to record that pressure.

Extreme care should be taken in the necessary judgement of major blast wave propagation direction for each measurement and particularly for those families of weapons which have multiple sources of "muzzle" blast such as recoilless rifles and rocket launchers.

M198 MUZZLE BLAST MEETING

26 November 1979

<u>NAME</u>	<u>ORGANIZATION</u>	<u>PHONE NUMBER</u>
George D. Kahl	BRL	283-3081
John Carbone	PM CAWS	880-2235
Jim Williams	PM CAWS	880-5477
John S. Nettles, Jr.	ODCSRDA	225-0787
Bruce C. Leibrecht (MAJ)	USAMRDC	343-7301
Georges Garinther	USAHEL	283-3459
Richard Price	USAHEL	283-4109
Joel Kalb	USAHEL	283-3459
Mario Lucchese	MTD	283-3044
Clayton A. Steiner	MTD	283-4596
W. Scott Walton	MTD	283-2313
Nathan J. Winslow	GWD, AMSAA	283-4704
Edmund J. Gion	BRL	283-2914
Richard W. Collett	LCWSL	880-4901
Albert A. De Prospero (COL)	AMSAA	283-4433
Benjamin F. Cummings	AMSAA	283-4882
Robert N. Schumacher	BRL	283-3663
Lawrence Puckett	BRL	283-2236
J. Richard Moore	BRL	283-4980
Fritz Oertel	BRL	283-3685
George A. Coulter	BRL	283-4911
George D. Teel	BRL	283-3361
William J. Taylor	BRL	283-4125
R. J. Happick	DARCOM	284-9870
John D. Weisz	USAHEL	283-3883
J. D. LaMothe (LTC)	USAMRDC	343-2121
J. S. Whitcraft	STEAP-MT-A	283-2136

III. PROPOSED STANDARDIZED TECHNIQUES

The proposed standardization of test procedure for the measuring of the muzzle blast from a weapon is given in this section.

A. Test Layout and Measurements

1. A dedicated test series should be provided for the measurement of blast pressures due to muzzle blast.
2. The transducer locations will be placed radially around the weapon with the muzzle placed at the transducer grid center (0.0) with the tube as nearly horizontal as possible. The 0° - 180° line will coincide with the axis of the barrel of the weapon in a plan (top) view, with the line-of-fire in the 0° direction. Special attention should be given to detail in mapping at the crew location.
3. A minimum of nine rounds will be fired, three each at the minimum useful elevation, the maximum useful elevation, and at an elevation midway between the minimum and the maximum.
4. All mapping transducers will be mounted at a height (to center of sensitive element) of 1.524 m (60 in.) for a standing crew man or 0.80 m (31.5 in.) for a crew man in sitting position.
5. A control transducer shall be located at ground surface on the 135° or 225° radial at a ground distance of 100 calibers measured from a point directly under the muzzle with the tube as nearly horizontal as possible.
6. All mapping transducers will be aligned with the plane of the sensitive element passing through the axis of the barrel of the weapon, thereby measuring at grazing incident to the blast wave. The sensitive element will be up. The intent is to measure the side-on pressure from the primary wave and any secondary explosions (such as those caused by unexpended propellant or detonatable gases outside the muzzle) which occurs along the axis of the barrel. This technique will tend to minimize the arrival of shock waves at transducer incidence angles between 0° and 90° where overshoot and ringing might occur.
7. Test site ambient conditions of atmospheric pressure, temperature, wind velocity, and wind direction at each firing time will be recorded.
8. Measurements shall not be made at wind speeds above 19.3 km/h (12 mph).

9. Best test practices will be used, i.e., transducers should be isolated from ground, shock-mounted, flash/thermal protected, and operated within the specified ambient temperature ranges. Cables should be protected from the blast (in conduit or buried) and run from the transducers away from the direction of propagation of the blast wave. Long lines should not degrade rise time of records.

10. For interior measurements (such as inside self propelled guns or tanks) made where the blast direction is uncertain (or arriving from many directions) the transducer shall be oriented with the sensing surface up, and with the plane of the sensing surface intersecting the center of the major suspected source, i.e., muzzle or open hatch.

B. Transducer Specifications

The transducers to be used for obtaining pressure - time data from the muzzle blast of a weapon shall meet these requirements:

1. The resonant frequency shall be 75 kHz or greater.
2. If the transducer does not have DC response the time constant will be a minimum of 200 ms.
3. The nonlinearity will be 3% or less of the full scale output of the transducer.
4. The transducer shall be chosen to minimize the effects of temperature at the expected temperature range to be used. Output will be corrected from temperature versus sensitivity curves for the individual transducer.
5. The sensitive element shall have a diameter of 6 mm (0.25 in.) or less. Transducer holders or housings should be of a minimum size to mount securely and to incorporate good aerodynamic design so as to minimize interference to the flow over the sensor surface.
6. The acceleration sensitivity will be not greater than 0.014 kPa/g (0.002 psi/g) in the axial direction and not greater than 0.069 kPa/g (0.01 psi/g) in the transverse direction.

C. Transducer Calibration

1. All transducers will be calibrated in a manner consistent with the transducer's time constant, i.e., sinusoidal pressure generator, pulse calibrator, dead weight tester, or shock tube.
2. All calibration methods used will be traceable to the National Bureau of Standards.

D. Recording Equipment Specifications

1. Recorders will have a frequency response of DC to 40 kHz or greater as defined by Inter-Range Instrumentation Group (IRIG) standards.
2. FM tape recorder reproduce amplifier output filters will be operated in the linear phase mode.
3. The Data acquisition system will provide a minimum of 25dB signal-to-noise ratio for finally processed data.

E. Data Processing

1. Data will be played back through a low-pass 40 kHz filter of the Bessel type, 36dB/octave rolloff.
2. The digitizing rate shall be a minimum rate of 160,000 samples/sec.
3. All data will be scaled to standard conditions of atmospheric pressure (101.35 kPa) and temperature (288°K) with Sach's scaling laws. The standard values scaled from the measured data (superscript (h)) are found as:

$$\text{peak pressure, } P_s = P_s^{(h)} \left(\frac{101.35}{P_o^{(h)}} \right) ;$$

$$\text{duration, } t = t^{(h)} \left(\frac{P_o^{(h)}}{101.35} \right)^{1/3} \left(\frac{T_o^{(h)}}{288} \right)^{1/2} ;$$

$$\text{and for impulse, } I = I^{(h)} \left(\frac{101.35}{P_o^{(h)}} \right)^{2/3} \left(\frac{T_o^{(h)}}{288} \right)^{1/2} ,$$

where the subscript (o) is used for ambient conditions.

4. Analog to digital converter shall have a 10 bit word size or greater.

F. Data Report

1. The data report will present only pressure-time data scaled to standard conditions.

2. SI units will be used with dB's or psi added where needed.
3. Representative pressure-time traces will be included in the report with an exact description of how peak pressure values were obtained from the data.
4. A block diagram of recording-data system will be given including manufacturer, type, and model number of each component of the system.
5. A detailed description including serial number, model number, etc., of all components of the weapon system test along with type and lot number of projectiles and charges will be included. This description will be sufficiently detailed as to allow a complete reconstruction of the weapon system tested.

IV. EVALUATION OF DATA AND TECHNIQUES

During the course of the working group meeting on 4 - 6 December 1979, the existing data regarding M198 muzzle blast overpressures was reviewed in detail. The conclusion of the working group concerning the comparison of data acquired by different organizations was that any comparison of existing data sets was improper because the various data sets were obtained under different circumstances. The M198 data measured by the Materiel Testing Directorate (MTD) at Aberdeen Proving Ground was taken at a height of 60" above the ground surface and with a very sparse mapping pattern. The data measured by the U.S. Army Aeromedical Research Laboratory (USAARL) at Yuma Proving Ground was taken at a height of 46" above the ground and employed a much more detailed mapping pattern particularly in the crew location area. The variation in height above the ground plane could have a significant effect on the strength of ground plane reflections. Additionally the probability of very complex wave form patterns in the crew area, due to wave interactions with the various M198 components in and surrounding that area, along with the different mapping patterns, could very well account for the higher values obtained by USAARL at specific locations within the crew area. Also during the review and discussion of the data sets it was revealed that there exists a serious doubt as to the similarity of the muzzle brakes used during the two test series. There is apparently a serious question in the minds of the USAARL personnel as to whether the muzzle brake used on the M198 during the Yuma tests was of the same type and design as that currently employed. The working group concluded that the data sets are sufficiently different and therefore that comparisons should not be attempted.

The working group was advised by Dr. Patterson, USAARL, that there does exist within USAARL another set of blast overpressure data for the M198 taken at Aberdeen Proving Ground in November - December 1978 that is not yet reported. A review of the procedures and techniques used in the recording of this data indicates that it is in compliance with the proposed standardized techniques contained in this report with the exception of the availability of data on ambient temperature, pressure, and wind conditions at the time of the testing. Since however, it is the recommendation of this working group that all data be scaled to accepted standard conditions (barometric pressure of 14.7 psi and ambient temperature of 15°C) it is the conclusion of this group that the variation of actual conditions and standard conditions would have been minimized and as a result the scaling factors would not be significantly different from one (1).

Assuming that the recommendations of this working group are accepted, it would then seem reasonable to conclude that the currently unpublished data from USAARL would be an accurate and reliable data set and therefore represent the blast overpressure field around the M198. If these recommendations and conclusions are accepted there would appear to be no justification or requirement for additional testing of the M198.

V. RECOMMENDATIONS

1. If the proposed standardized techniques for muzzle blast measurement are accepted, it is recommended that they be incorporated into MIL-STD-1474B(MI), 18 June 1979.
2. It is recommended that the currently unpublished data set from the USAARL test firings of the M198 should be accepted as the reliable blast pressure field existing around the weapon when fired.

Working Group Members

George A. Coulter
GEORGE A. COULTER, Chairman,

Georgbs Garinther
GEORGBS GARINTHER

Edmund J. Gion
EDMUND J. GION

Joel Kalb
JOEL KALB

Ben Mozo
BEN MOZO

James Patterson
JAMES PATTERSON

George D. Teel
GEORGE D. TEEL

W. Scott Walton
W. SCOTT WALTON

BIBLIOGRAPHY

1. George A. Coulter, "Dynamic Calibration of Pressure Transducers at the BRL Shock Tube Facility", Ballistic Research Laboratory Memorandum Report No. 1843, May 1967. (AD#654508)
2. "Engineering Design Handbook, Explosions in Air, Part One", AMC Pamphlet AMCP 706-181, Department of the Army Headquarters, 5001 Eisenhower Avenue, Alexandria, VA 22333.
3. John S. Hilton, and others, "A Test for Determining the Effect of Thermal Transients on Pressure-Transducer Response", NBS Technical Note 905, U.S. Department of Commerce/National Bureau of Standards, Washington, DC 20234.
4. James H. Patterson, Ben T. Mozo, and Ronny H. Marrow, "Preliminary Evaluation of the Blast Overpressure Field Around the M198, 155 mm Howitzer Firing the M203E1 Propelling Charge", USAARL Report No. 80-3, October 1979.
5. MIL-STD-1474(MI), 18 June 1979.
6. "Telemetry Standards Revised February 1969", IRIG Document 106-69, Secretariat Range Commanders Council, White Sands Missile Range, New Mexico 88002, 1969.
7. "The Effects of Nuclear Weapons", Department of the Army Pamphlet No. 50-3, Headquarters, Department of the Army, Washington, DC, March 1977.
8. R.R. Weynants, "An Experimental Investigation of Shock-Wave Diffraction Over Compression and Expansion Corners", University of Toronto UTIAS Tech Note No. 126, AFOSR 68-0418, April 1968.
9. Georges Garinther and James B. Moreland, "Transducer Techniques for Measuring the Effects of Small-Arm's Noise on Hearing", HBL Tech Memo 11-65, Human Engineering Lab., APG, MD, July 1965.

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
12	Commander Defense Technical Info Center ATTN: DDC-DDA Cameron Station Alexandria, VA 22314	1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDMD-ST 5001 Eisenhower Avenue Alexandria, VA 22333	1	Commander US Army Communications Rsch and Development Command ATTN: DRDCO-PPA-SA Fort Monmouth, NJ 07703
2	Commander US Army Armament Research and Development Command ATTN: DRDAR-TSS (2 cys) Dover, NJ 07801	1	Commander US Army Electronics Research and Development Command Technical Support Activity ATTN: DELSD-L Fort Monmouth, NJ 07703
1	Commander US Army Armament Materiel Readiness Command ATTN: DRSAR-LEP-L, Tech Lib Rock Island, IL 61299	2	Commander US Army Missile Command ATTN: DRDMI-R DRDMI-YDL Redstone Arsenal, AL 35809
1	Director US Army ARRADCOM Benet Weapons Laboratory ATTN: DRDAR-LCB-TL Watervliet, NY 12189	1	Commander US Army Tank Automotive Rsch and Development Command ATTN: DRDTA-UL Warren, MI 48090
2	Commander US Army Aeromedical Research Laboratory ATTN: SGRD-UAH-SP James Patterson Ben Mozo P.O. Box 577 Fort Rucker, AL 36362	1	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SL, Tech Lib White Sands Missile Range NM 88002
1	Commander US Army Aviation Research and Development Command ATTN: DRSAB-E P.O. Box 209 St. Louis, MO 61366	1	Guns Test Branch AD 3246 TBSTW/TETFG Eglin AFB, FL 32542

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>
--------------------------------	---------------------

Aberdeen Proving Ground

Dir, USAMSAA

ATTN: DRXSY-D

DRXSY-MP, H. Cohen

DRXSY-LA, B. Cummings

Cdr, USATECOM

ATTN: DRSTE-TO-F

Dir, Wpns Sys Concepts Team

Bldg. E3516, EA

ATTN: DRDAR-ACW

Dir, USAMTD

ATTN: STEAP-MT-G, Scott Walton

Dir, USAHEL

ATTN: DRXHE-BR, G. Garinther

J. Kalb

USER EVALUATION OF REPORT

Please take a few minutes to answer the questions below; tear out this sheet and return it to Director, US Army Ballistic Research Laboratory, ARRADCOM, ATTN: DRDAR-TSB, Aberdeen Proving Ground, Maryland 21005. Your comments will provide us with information for improving future reports.

1. BRL Report Number _____

2. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which report will be used.)

3. How, specifically, is the report being used? (Information source, design data or procedure, management procedure, source of ideas, etc.)

4. Has the information in this report led to any quantitative savings as far as man-hours/contract dollars saved, operating costs avoided, efficiencies achieved, etc.? If so, please elaborate.

5. General Comments (Indicate what you think should be changed to make this report and future reports of this type more responsive to your needs, more usable, improve readability, etc.)

6. If you would like to be contacted by the personnel who prepared this report to raise specific questions or discuss the topic, please fill in the following information.

Name: _____

Telephone Number: _____

Organization Address: _____

