



AMSAA

TECHNICAL REPORT NO. 297

TECHNICAL
LIBRARY

METHODOLOGY FOR ESTIMATING MISSION AVAILABILITY AND RELIABILITY FOR A MULTIMODAL SYSTEM

HENRY P. BETZ

MAY 1980

APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED.

U. S. ARMY MATERIEL SYSTEMS ANALYSIS ACTIVITY
ABERDEEN PROVING GROUND, MARYLAND

DISPOSITION

Destroy this report when no longer needed. Do not return it to the originator.

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so specified by other official documentation.

WARNING

Information and data contained in this document are based on the input available at the time of preparation. The results may be subject to change and should not be construed as representing the DARCOM position unless so specified.

TRADE NAMES

The use of trade names in this report does not constitute an official endorsement or approval of the use of such commercial hardware or software. The report may not be cited for purposes of advertisement.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Report No. 297	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Methodology for Estimating Mission Availability & Reliability for a Multimodal System		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Henry P. Betz		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Materiel Systems Analysis Activity Reliability, Availability & Maintainability Div. Aberdeen Proving Ground, MD 21005		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DA Project No. 1R665706M541
11. CONTROLLING OFFICE NAME AND ADDRESS Commander US Army Materiel Development & Readiness Command 5001 Eisenhower Avenue Alexandria, VA 22333		12. REPORT DATE MAY 1980
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 17
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Mission Reliability Operational Availability System		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Reliability and Operational Availability estimation techniques are developed for systems having several modes of operation and whose Reliability and Operational Availability requirements have been set for a particular mission. An example of the application of these models is also included.		

ACKNOWLEDGEMENT

The author wishes to recognize Dr. Alan W. Benton and Mr. Robert E. Mioduski for their contributions to this report.

Next page is blank.

CONTENTS

	Page
ACKNOWLEDGEMENT.	3
1. INTRODUCTION	7
2. DERIVATION OF EQUATIONS.	9
3. EXAMPLE OF APPLICATION	11
REFERENCE.	13
DISTRIBUTION LIST.	15

LIST OF FIGURES

FIGURE NO.

1	POSSIBLE TEST SCENARIO	8
2	TACTICAL MISSION	8
3	SYSTEM OPERATION	8

Next page is blank.

METHODOLOGY FOR ESTIMATING MISSION AVAILABILITY AND RELIABILITY FOR A MULTIMODAL SYSTEM

1. INTRODUCTION

Developmental Testing constraints sometimes require that a system be tested according to a profile that is different from the mission profile for which the system's reliability requirements were specified. For example, a surface to air missile system whose capabilities include movement, surveillance, and target engagement might, because of accelerated testing requirements, be tested extensively in the target engagement mode (in order to assure that all engagement performance requirements are met) and only minimally in the movement and surveillance modes (Figure 1). However, in the tactical mission profile, surveillance functions might encompass the majority of the mission (Figure 2). It would be incorrect to compare the system availability and mean time between failure (MTBF) demonstrated in the test scenario to the requirements specified for the tactical scenario. This is due to the fact that the engagement mode of operation is more complex and therefore, many more failures associated with it would be expected. Although the rate of failure detections experienced in the engagement mode of the test scenario would remain the same as in the tactical one, the amount of time spent in the engagement mode of the tactical scenario is much less than the test scenario which means that a smaller number of engagement mode failures should be expected on a per mission basis. In this situation, it can be seen that evaluating the system MTBF based on the test scenario would understate the MTBF value. In order to determine if the system meets its reliability specifications, the reliability of the system in the tactical mission must be evaluated from data collected in a test scenario which is entirely different.

This report will develop a methodology that can be used to evaluate a system which is operated in a series of n modes with the i^{th} mode being defined as having a certain number of subsystems operating in it and mode $i + 1$ consists of mode i subsystems plus additional subsystems operating. That is, subsystems operating in mode i are nested in mode $i + 1$ (Figure 3).

In addition, the corrective maintenance time and logistics delay time that will be seen in the field are not always known at the time of development testing, either because maintenance procedures are not fully specified at that time or for expediency's sake contractor personnel perform maintenance normally done by the soldier. This report allows for the insertion of maintainability parameters derived from other sources i.e. maintainability demonstrations, logistics simulations, etc.

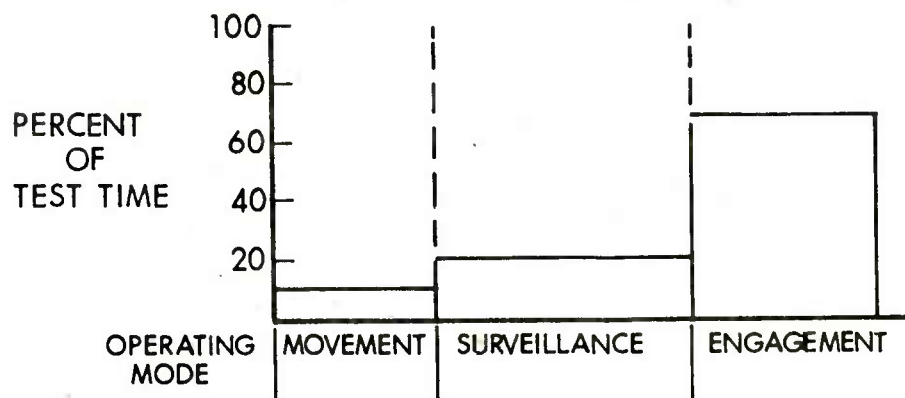


Figure 1. Possible Test Scenario.

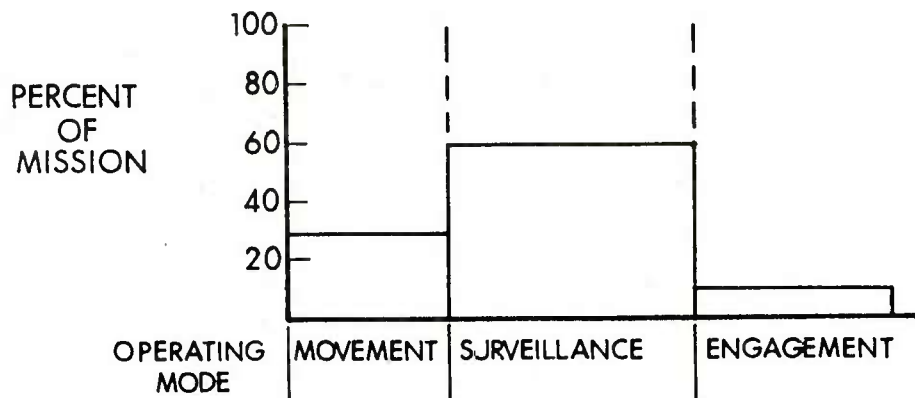


Figure 2. Tactical Mission.

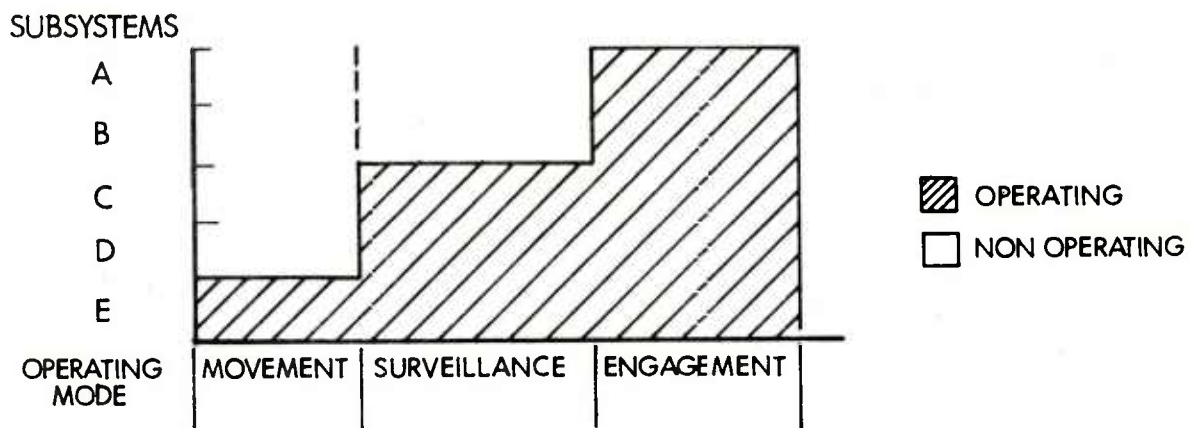


Figure 3. System Operation .

2. DERIVATION OF EQUATIONS

The first step in deriving MTBF and operational availability estimates is to begin with the basic definition of operational availability from which we will derive the mission profile MTBF. It is assumed that estimates of failure rates or MTBFs for each of the operating modes are available. The basic definition of operational availability [1] is given by

$$A_o = \frac{\text{UPTIME}}{\text{UPTIME} + \text{DOWNTIME}} \quad (1)$$

Let us define

k_i = time spent in mode i as specified by desired scenario

MTBF_i = mean time between failure detections of operating mode i (derived from test scenario)

MDT_i = mean downtime including logistics downtime in operating mode i (either specified in tactical scenario or determined by other means - maintainability demonstration, simulation, etc.) If these individual values cannot be determined, use MDT for all values of MDT_i .

MDT = Overall system mean downtime calculated as

$$\frac{\sum \left(\frac{k_i}{\text{MTBF}_i + \text{MDT}_i} \right) \text{MDT}_i}{\sum \left(\frac{k_i}{\text{MTBF}_i + \text{MDT}_i} \right)} \quad \text{if } \text{MDT}_i \text{'s are available.}$$

Otherwise, use an overall MDT from test, simulation, etc.

Now, total time is uptime plus downtime, or uptime equals total time minus downtime. From the definitions it may be noted that total mission time, T , is given by

$$T = \sum_i k_i$$

In determining downtime, it may be noted that

$$\frac{k_i}{\text{MTBF}_i + \text{MDT}_i}$$

is the expected number of failures in operating mode i and multiplying this by the expected downtime for mode i , MDT_i , gives the expected

downtime in mode i . Therefore,

$$\text{UPTIME} = \sum_i \left[k_i - \left(\frac{k_i}{\text{MTBF}_i + \text{MDT}_i} \right) \text{MDT}_i \right] \quad (2)$$

and thus, it follows that

$$A_o = \frac{\sum_i \left[k_i - \left(\frac{k_i}{\text{MTBF}_i + \text{MDT}_i} \right) \text{MDT}_i \right]}{T} \quad (3)$$

It may be shown that A_o is a weighted average of the mode availabilities. On rearranging (3), we have

$$\begin{aligned} A_o &= \frac{\sum_i \frac{k_i (\text{MTBF}_i + \text{MDT}_i) - k_i \text{MDT}_i}{\text{MTBF}_i + \text{MDT}_i}}{T} \\ &= \frac{1}{T} \sum_i \frac{k_i \text{MTBF}_i}{\text{MTBF}_i + \text{MDT}_i} \\ &= \sum_i \left(\frac{k_i}{T} \right) \left(\frac{\text{MTBF}_i}{\text{MTBF}_i + \text{MDT}_i} \right) \\ &= \sum_i W_i A_{oi} \end{aligned}$$

Now, we may also view A_o as

$$A_o = \frac{\text{MTBF}_{\text{sys}}}{\text{MTBF}_{\text{sys}} + \text{MDT}} \quad (4)$$

where MTBF_{sys} is the system MTBF. Equating (3) and (4) we have

$$\frac{\text{MTBF}_{\text{sys}}}{\text{MTBF}_{\text{sys}} + \text{MDT}} = \frac{\sum_i \left[k_i - \frac{k_i}{\text{MTBF}_i + \text{MDT}_i} \text{MDT}_i \right]}{T}$$

Rearranging and solving for system MTBF yields

$$MTBF_{sys} = \frac{T}{\sum_i \frac{k_i}{MTBF_i + MDT_i}} - MDT \quad (5)$$

3. EXAMPLE OF APPLICATION

Consider a surface to air missile system which is characterized by three modes of operation - travel, surveillance and target engagement. A system MTBF requirement of 100 hours and an operational availability requirement of 0.90 have been set. The typical 24 hour scenario for which the requirements were set is as follows:

	<u>Time (hours)</u>
Travel	1
Surveillance	21
Engagement	2

During the test program the following failure detection rates were observed:

	<u>MTBF_i</u>
Travel	1000
Surveillance	500
Engagement	50

Overall mean time to repair was determined to be 6 hours and mean logistics delay time was found by a logistics simulation to be 14 hours. No other information is available.

The question is then, has the system demonstrated requirements? Using equation (5) we have

$$MTBF_{sys} = \frac{T}{\sum_i \frac{k_i}{MTBF_i + MDT_i}} - MDT$$

$$\text{Therefore MTBF}_{\text{sys}} = \frac{24}{\frac{1}{1000 + 20} + \frac{21}{500 + 20} + \frac{2}{50 + 20}} - 20$$

$$\text{MTBF}_{\text{sys}} = 323 \text{ hrs.}$$

Using Equation 3, we have:

$$A_o = \frac{\sum_i \left[k_i - \left(\frac{k_i}{\text{MTBF}_i + \text{MDT}_i} \right) \text{MDT}_i \right]}{\text{TOTAL TIME IN MISSION}}$$

$$A_o = \frac{\left[1 - \left(\frac{1}{1000 + 20} \right) 20 \right] + \left[21 - \left(\frac{21}{500 + 20} \right) 20 \right] + \left[2 - \left(\frac{2}{50 + 20} \right) 20 \right]}{24}$$

$$A_o = .94$$

Therefore, the system requirements have been demonstrated.

REFERENCE

1. AMCP 706-132, ENGINEERING DESIGN HANDBOOK, Maintenance Engineering Techniques, pp 4-12.

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>
12	Commander Defense Technical Information Center ATTN: TCA Cameron Station Alexandria, VA 22314
1	Commander US Army Materiel Development & Readiness Command ATTN: DRCCP DRCDE-F DRCRE DRCPA-S DRCQA DRCDE-R DRCDE-D DRCBSI-L DRCBSI-D 5001 Eisenhower Avenue Alexandria, VA 22333
2	Commander US Army Armament Research & Development Command ATTN: DRDAR-SEA Technical Library Dover, NJ 07801
1	Commander Rock Island Arsenal ATTN: Tech Library Rock Island, IL 61299
1	Commander Harry Diamond Laboratories ATTN: DELHD-SAB 2800 Powder Mill Road Adelphi, MD 20783
1	Commander US Army Test & Evaluation Command ATTN: STEDP-MD-L Dugway Proving Ground, UT 84022

DISTRIBUTION LIST (CONTINUED)

<u>No. of Copies</u>	<u>Organization</u>
1	Commander US Army Aviation R&D Command ATTN: DRDAV-BC P.O. Box 209 St. Louis, MO 63166
1	Commander US Army Electronics R&D Command ATTN: DRDEL-SA Fort Monmouth, NJ 07703
1	Commander US Army Electronics R&D Command ATTN: DRDEL-AP-OA 2800 Powder Mill Road Adelphi, MD 20783
2	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-EL ATAA-T White Sands Missile Range, NM 88002
1	Commander US Army Missile Command ATTN: DRDMI-C (R&D) Redstone Arsenal, AL 35809
1	Commander US Army Troop Support & Aviation Materiel Readiness Command ATTN: DRSTS-3A 4300 Goodfellow Blvd. St. Louis, MO 63120
1	Commander US Army Tank-Automotive Research & Development Command ATTN: DRDTA-JL (Tech Lib) DRDTA-V Warren, MI 48090

DISTRIBUTION LIST (CONTINUED)

<u>No. of Copies</u>	<u>Organization</u>
1	Commander US Army Mobility Equipment R&D Command ATTN: DRDME-O Fort Belvoir, VA 22060
1	Commander US Army Natick R&D Command ATTN: DRDNA-O Natick, MA 01760
2	Chief Defense Logistics Studies Information Exchange US Army Logistics Management Center ATTN: DRXMC-D Fort Lee, VA 23801
1	Commander US Army Concepts Analysis Agency 8120 Woodmont Avenue Bethesda, MD 20014
1	Reliability Analysis Center ATTN: Mr. I. L. Krulac Griffiss AFB, NY 13441
	<u>Aberdeen Proving Ground</u>
2	Cdr, USATECOM ATTN: DRSTE DRSTE-CS-A Bldg 314 Dir, BRL, Bldg 328 Dir, BRL ATTN: DRDAR-TSB-S (STINFO Branch) Bldg 305 Dir, HEL, Bldg 520