
AD-A088 949 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
CAMP PAGE AAF, CHUNCHON, KOREA. REVISED UNIFORM SUMMARY OF SURF--ETC(U)
MAR 74
UNCLASSIFIED USAFETAC/DS-80-075 NL

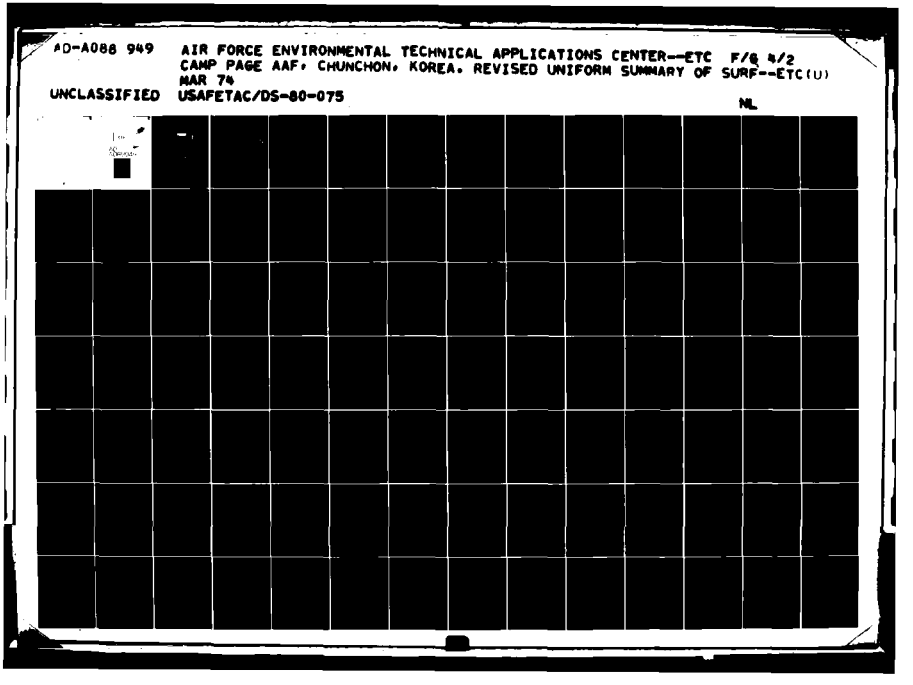

PHOTOGRAPH THIS SHEET

AD A088949

DTIC ACCESSION NUMBER

LEVEL

[redacted]

ATTENTION!
Camera Operator
When Filming attached document
use Bell & Howell camera ONLY!!!

Consult with Supervisor for
further instructions.

INVENTORY

USAFETAC DS-80/075

DOCUMENT IDENTIFICATION

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

DISTRIBUTION STATEMENT

ACCESSION FOR
NTIS GRA&I
DTIC TAB
UNANNOUNCED
JUSTIFICATION

BY
DISTRIBUTION /
AVAILABILITY CODES

DIST	AVAIL AND/OR SPECIAL
A	

DISTRIBUTION STAMP

DTIC
ELECTE
SEP 1 1 1980
S D
D

DATE ACCESSIONED

80 9 3 026

DATE RECEIVED IN DTIC

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-DDA-2

DOCUMENT PROCESSING SHEET

DTIC FORM OCT 79 70A

USAFETAC DS-80/075

5195

CAMP PAGE AAF/KHUNCHON
CL11179

DATA PROCESSING BRANCH
USAFETAC
Air Weather Service (MAC)

REVISED UNIFORM SUMMARY OF
SURFACE WEATHER OBSERVATIONS

CHUNCHON KOREA TEAM 825 WBAN# 43224
N 37 53 E 127 43 WMO#
CAMP PAGE AAF KOREA/CHUNCHON WBAN# 43271
N 37 53 E 127 43 ELEV.263 FT.RKNC WMO# 47104

PARTS A-F
POR FROM HOURLY OBS 43224 JUN 51-NOV 54,
APR-JUN 55, APR-OCT 56
43271 SEP 60-JUL 72
POR FROM DAILY OBS 43224 JUN 51-NOV 54,
APR-JUN 55, APR-OCT 56
43271 OCT 60-DEC 63,
FEB 64-NOV 65, JAN 66-DEC 67,
FEB 68-JUL 72

AD A008949

MAR 06 1974

FEDERAL BUILDING
ASHEVILLE, N. C.

859-4820 b

UNCLASSIFIED

REPORT DOCUMENTATION PAGE

USAFETAC/TS- 80/075

Revised Uniform Summary of Surface Weather Observations (RUSSWO)- Camp Page AAF, Chunchon, Korea

Final rept

USAFETAC/DL-4
Air Force Environmental Technical Appl Center
Scott AFB IL 62225

USAFETAC/CBD
Air Weather Service (MAC)
Scott AFB IL 62225

6 Mar, 74

UNCLASSIFIED

Approved for public release; distribution unlimited

*RUSSWO	Daily temperatures	Atmospheric pressure
Snowfall	Extreme snow depth	Extreme surface winds
Climatology	Sea-level pressure	Psychrometeric summary
Surface Winds	Extreme temperature	Ceiling versus visibility
Relative Humidity	*Climatological data	(over

This report is a six-part statisitical summary of surface weather observations for **Camp Page AAF, Chunchon, Korea**

It contains the following parts: (A) Weather Conditions; Atmospheric Phenomena; (B) Precipitation, Snowfall and Snow Depth (daily amounts and extreme values); (C) Surface winds; (D) Ceiling versus Visibility; Sky Cover; E) Psychrometric Summaries (daily maximum and minimum temperatures, extreme maximum and minimum temperatures, psychrometric summary of wet-bulb temperature depression versus dry-bulb temperature, means and standard deviations of dry-bulb, wet-bulb (over)

DD FORM 1473

UNCLASSIFIED

19. Percentage frenquency of distribution tables
Dry-bulb temperature versus wet-bulb temperature
Cumulative percentage frequency of distribution tables

* Korea *Camp Page AAF, Korea

20. and dew point temperatures and relative humidity); and (F) Pressure Summary (means, standard, deviations, and observation counts of station pressure and sea-level pressure). Data in this report are presented in tabular form, in most cases in percentage frequency of occurance or cumulative percentage frequency of occuring tables.

DATA IN THESE TABULATIONS FOR THE PERIOD FROM JANUARY 1971 AND LATER HAVE NOT RECEIVED THE SAME, COMPREHENSIVE MANUAL AND COMPUTER QUALITY EDITING PROCEDURES DURING PROCESSING AT [illegible] (DATA PROCESSING BRANCH) AS DID THE OBSERVATIONS FOR EARLIER PERIODS INCLUDED IN THE STUDY.

SUSPECT CASES OR QUESTIONABLE VALUES MAY OCCUR IN THE 1971 AND LATER DATA, AND APPEAR IN THE TABULATIONS AS A PERCENTAGE FREQUENCY OF ".0", WHICH USUALLY INDICATES ONLY [illegible]. THE EXTREME VALUES MAY OR MAY NOT BE COMPLETELY VALID, BUT THE USER SHOULD NOT DISREGARD [illegible]. CASES OF IMPOSSIBLE CONDITIONS HAVE BEEN LINED THROUGH IN BLACK INK.

1

THE PERIOD OF RECORD JAN 71-JUL 72 FOR HOURLY OBSERVATIONS IN THIS SUMMARY ARE FROM GWC DATA WHICH IS UNEDITED. THE SPORTS LINED THROUGH IN BLACK INK ARE OBVIOUS ERRORS.

0 24 5 (OL A)
11 NOV
OCT 69
SPECIAL STANDARD USAMTAC

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

REVISED UNIFORM SUMMARY
OF SURFACE WEATHER OBSERVATIONS

HOURLY OBSERVATIONS

Hourly observations are defined as those record or record-special observations recorded at scheduled hourly intervals.

DAILY OBSERVATIONS

Daily observations are selected from all data recorded on reporting forms and combined into Summary of the Day observations. (Selected from record-special, local, summary of the day, remarks, etc.)

DESCRIPTION OF SUMMARIES

Preceding each section is a brief description of the data comprising each part of the Revised Uniform Summary of Surface Weather Observations and the manner of presentation. Tabulations are prepared from hourly and daily observations recorded by stations operated by the U. S. Services and some foreign stations using similar reporting practices.

Unless otherwise noted the following summaries are included for this station:

PART A	WEATHER CONDITIONS	PART E	DAILY MAX, MIN, & MEAN TEMP
	ATMOSPHERIC PHENOMENA		EXTREME MAX & MIN TEMP
PART B	PRECIPITATION		PSYCHROMETRIC-DRY VS WET BULB
	SNOWFALL		MEAN & STD DEV . (DRY BULB, WET BULB, & DEW POINT)
	SNOW DEPTH		RELATIVE HUMIDITY
PARTC	SURFACE WINDS		
PART D	CEILING VERSUS VISIBILITY	PART F	STATION PRESSURE
	SKYCOVER		SEA LEVEL PRESSURE

STANDARD 3-HOUR GROUPS

All summaries requiring diurnal variations are summarized in eight 3-hour periods corresponding to the following sets of hourly observations: 0000-0200, 0300-0500, 0600-0800, 0900-1100, 1200-1400, 1500-1700, 1800-2000, 2100-2300 hours local standard time.

MISSING HOUR GROUPS

Summary sheets are omitted when stations maintaining limited observing schedules did not report certain three-hour periods for any particular month during the available period of record. Such missing sheets are listed below, and are applicable to all summaries prepared from hourly observations.

JANUARY_____	APRIL_____	JULY_____	OCTOBER_____
FEBRUARY_____	MAY_____	AUGUST_____	NOVEMBER_____
MARCH_____	JUNE_____	SEPTEMBER_____	DECEMBER_____

874-29958

STATION NO ON SUMMARY	STATION NAME	LATITUDE	LONGITUDE	STATION ELEV (FT)	CALL SIGN	WMO NUMBER
43271	CAMP PAIGE AAF KOREA/CHUNCHON	N 37 53	E 127 43	263	RKNC	47104

STATION LOCATION AND INSTRUMENTATION HISTORY

NUMBER OF LOCATION	GEOGRAPHICAL LOCATION & NAME	TYPE OF STATION	AT THIS LOCATION FROM	AT THIS LOCATION TO	LATITUDE	LONGITUDE	ELEVATION ABOVE MSL STATION (FT)	ELEVATION ABOVE MSL HGT FTTF BAROMETER	OBS PER DAY
1	Chunchon Korea Team 825	AAF	Jun 51	Nov 54	N 37 55	E 127 45	260	N/A	24
2	Same	Same	Apr 55	Jun 55	N 37 56	E 127 46	267	260	13
3	Same	Same	Apr 56	Oct 56	Same	Same	Same	Same	13
4	Chunchon Korea	AAF	Sep 60	Feb 63	N 37 52	E 127 43	262	266	13 to 17
5	Same	Same	Mar 63	Feb 65	N 37 53	Same	263	Same	13 to 14
6	Camp Paige Korea/Chunchon	Same	Mar 65	Jul 72	Same	Same	Same	Same	12 to 14

NUMBER OF LOCATION	DATE OF CHANGE	SURFACE WIND EQUIPMENT INFORMATION LOCATION	TYPE OF TRANSMITTER	TYPE OF RECORDER	HT ABOVE GROUND	REMARKS, ADDITIONAL EQUIPMENT, OR REASON FOR CHANGE
1	Jun 51to Feb 54	Located on roof of Weather Station.	Selsyn	ML204B (Wnd Pnl)	26 Ft	
2	Mar 54to Nov 54	Located on top of Base Weather Station.	AN/GMQ-1	Same	30 Ft	
3	Apr 55to Oct 56	Not available.	N/A	N/A	N/A	
4	Sep 60to Mar 62	Located 75 ft NW of Control Tower mounted on the ground.	AN/GMQ-11	None	14 Ft	
5	Apr 62to Feb 64	Located on top of Control Tower.	Same	None	40 Ft	
6	Mar 64to Feb 65	Located 41.5 ft E of Bldg T-351.	Same	None	26 Ft	

USAFETAC FORM APR 68 0-19 (OL A)

CONTINUED ON REVERSE SIDE

NUMBER OF LOCATION	DATE OF CHANGE	SURFACE WIND EQUIPMENT INFORMATION				REMARKS, ADDITIONAL EQUIPMENT, OR REASON FOR CHANGE
		LOCATION	TYPE OF TRANSMITTER	TYPE OF RECORDER	HT ABOVE GROUND	
7	Mar 65to Feb 68	Located on top of Control Tower.	Same	None	40 Ft	
8	Mar 68to Jun 70	Located on Control Tower 100 ft W of Weather Station.	Same	None	30 Ft	
9	Jul 70to Dec 70	Located 300 ft of centerline, 850 ft from end of Rnwy 21.	Same	None	13 Ft	
10	Jan 71to Jul 72	Located 80 ft NW of centerline near center of Rnwy 03/21.	Same	None	Same	

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

A

PART A WEATHER CONDITIONS

This summary is a percentage frequency occurrence of various atmospheric phenomena and obstructions to vision, derived from hourly observations, and is presented in two tables as follows:

1. By month and annual, all hours and years combined.

2. By month, all years combined, by standard 3-hour groups.

A percent value of ".0" in these tables indicates less than .05 percent, which is usually only one occurrence. The various phenomena included in each category on the forms are listed below:

Thunderstorms - All reported occurrences of thunderstorm, tornado, and waterspout.

Rain and/or drizzle - All liquid precipitation, falling to the ground, not freezing.

Freezing rain and/or freezing drizzle (glaze) - Precipitation falling in liquid form, but freezing on contact with an unheated surface.

Snow and/or sleet (ice pellets) - Included are snow, snow pellets, sleet, snow grains, ice crystals, and ice pellets from Jan 68 and later. (Snow pellets also known as soft hail)

Hail - Occurrences of hail and small hail are included.

Percentage of observations with precipitation - Included in this category are the observations when one or more of the above phenomena occurred. Since more than one type of precipitation may be reported in the same observation, the sums of the individual categories may exceed the percentages of the observations with precip.

Fog - Included are fog, ice fog, and ground fog.

Smoke and/or haze - Occurrences of smoke, haze, or combinations of smoke and haze are included.

Blowing snow - Occurrences of blowing snow (also drifting snow when reported from non-WBAN sources).

Dust and/or sand - Included are blowing dust, blowing sand, and dust.

Continued on Reverse

Blowing spray - This item if reported, is not shown in a separate category on this form but is included in the computation Percentage of Observations with Obstructions to Vision, below.

Percentage of observations with obstructions to vision - Included in this category are the observations when one or more of the above obstructions to vision occurred. Since more than one type of obstruction may be reported in the same observation, the sums of the individual categories may exceed the percentage total columns. Also, although precipitation may reduce visibility, it is not considered an obstruction to vision for purposes of this summary; therefore, the percentage total of obstructions to vision need not reflect the total observations with reduced visibility.

2

WEATHER CONDITIONS

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & OR DRIZZLE	SNOW AND OR SLEET	HAIL	% OF OBS WITH PRECIP	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST D VISION	TOTAL NO OF OBS
[illegible]	ALL		1.[illegible]	.[illegible]	[illegible].7		7.8	7.[illegible]	32.7	.[illegible]	.0	36.9	[illegible]520
[illegible]		.[illegible]	1.[illegible]	.[illegible]	6.4		1[illegible].1	6.[illegible]	20.2		.2	24.[illegible]	5041
[illegible]		.[illegible]	6.2		3.6	.0	9.5	6.7	11.7		.2	16.7	6742
[illegible]		.1	9.0		.3		9.2	7.9	9.7		.5	16.7	7259
[illegible]		.2	[illegible].1				[illegible].1	6.3	11.6		.1	17.0	7463
[illegible]		.7	12.0				14.0	8.4	4.8		.0	12.0	7461
[illegible]		.[illegible]	2[illegible].1				20.1	16.[illegible]	5.9			20.4	7803
[illegible]		.7	14.2				14.2	19.4	5.1		.0	22.4	7446
[illegible]		.2	10.4				10.4	19.[illegible]	7.8			26.1	7237
[illegible]		.1	6.0		.0		6.0	20.[illegible]	12.8		.0	30.1	7507
[illegible]		.2	6.1		.8	.1	7.0	18.8	15.3			31.1	6730
[illegible]			2.9	.1	4.9		7.7	13.3	25.3		.1	34.7	6594
TOTALS		.2	8.3	.0	1.9	.0	10.2	12.7	13.6	.0	.1	24.0	84803

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

43271 — STATION
CAMP PAGE AAF KOREA/CHUNCHON — STATION NAME
52-54,61-72 — YEARS
JAN — MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS
JAN	00-02		1.3		2.1		3.4	2.5	33.1			33.5	236
	03-05		.7		5.9		6.6	12.4	31.4			38.2	542
	06-08		.5		8.8		9.3	15.6	34.6			43.3	1279
	09-11		.9		12.2		12.8	18.3	52.6	.1		62.5	1280
	12-14		1.9	.1	8.3		10.0	5.5	35.5	.2	.1	38.5	1244
	15-17		1.5		7.4		8.6	2.3	14.8			16.9	1186
	18-20		1.5		4.6		6.2	4.2	25.8			28.5	520
	21-23		1.7		3.9		5.6	1.3	33.9			33.9	233
TOTALS			1.3	.0	6.7		7.8	7.8	32.7	.0	.0	36.9	6520

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

43271 (A P PROP AFB [illegible]) 52-54,61-72 [illegible]
STATION STATION NAME YEARS MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS
[illegible]	00-02		4.7		5.5		10.6	3.7	14.1			14.9	255
	03-05	.2	4.0		6.1		12.1	7.1	18.5			22.6	498
	06-08	.1	2.6		8.2		10.3	14.7	30.1		.2	37.6	1164
	09-11		2.7		7.2		10.8	14.2	43.5		.3	50.2	1162
	12-14		3.3		5.6		9.6	4.3	21.3		.4	24.1	1135
	15-17		3.5	.1	5.5		9.6	2.3	8.2		.3	10.3	1094
	18-20		4.8		5.4		10.0	5.0	10.0		.2	13.5	480
	21-23		5.1		4.3		9.4	3.0	16.1			18.8	255
TOTALS		.0	3.8	.0	6.4		10.1	6.9	20.2		.2	24.9	6041

1 ATA PR TESSI[illegible] RANGE
2 SAF ETA
1 AIR WEAT ER SERVICE/ AC

WEATHER CONDITIONS

43212	CAPE PAGE AAF AUREA/CHURCH	52-54,61-72	AR
STATION	STATION NAME	YEARS	MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/ OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS.
MAR	00-02		7,2		2,2		10,0	1,2	9,0			10,8	279
	03-05		7,6		3,9		11,1	10,6	11,7			18,9	540
	06-08		5,4		4,7	,1	9,6	17,2	20,9		,3	31,5	1300
	09-11		4,4		4,8		8,7	9,9	27,6		,5	34,6	1305
	12-14		4,6		3,4		7,4	3,5	7,2		,4	10,5	1272
	15-17	,1	4,7		4,1		8,4	3,9	4,4		,4	8,4	1233
	18-20		7,2		2,7		9,9	4,4	5,9		,2	9,9	527
	21-23		7,9		2,9		10,7	2,1	7,1			9,3	280
TOTALS		,0	6,2		3,6	,0	9,5	6,7	11,7		,2	16,7	6742

2

WEATHER CONDITIONS

47271 | CAMP PAGE AAF KOREA/CHUNCHON | 52-56,61-72 | APR

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
APR	00-02		7,1				7,1	3,6	11,2			13,8	269
	03-05		4,7		,2		4,9	9,5	8,1			14,9	529
	06-08	,1	10,4		,3		10,7	18,0	18,0		,1	31,8	1436
	09-11	,2	11,0		,3		11,2	10,9	15,6		,4	28,0	1412
	12-14	,1	11,1		,5		11,5	6,9	5,8		,7	12,5	1406
	15-17		11,3		,7		11,5	6,5	2,9		1,1	10,4	1369
	18-20		9,3		,2		9,3	5,8	3,3		,7	9,3	569
	21-23		7,4				7,4	2,2	9,3		,7	12,3	269
TOTALS		,1	9,0		,3		9,2	7,9	9,7		,5	16,7	7259

2

ATR PP CLASSIFICATION
USAF ETAC
IR EAT EP REVISED / AC

WEATHER CONDITIONS

43271 | CAMP PAGE AAF KOREA/CHUNCHON | 52-56,61-72 | AY

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS
AY	00-02		7.2				7.2	2.9	16.5			19.4	279
	03-05		7.7				7.7	8.1	13.8			20.2	521
	06-08	.1	8.3				8.3	17.0	18.9			32.2	1474
	09-11		7.7				7.7	7.2	17.1			23.3	1466
	12-14	.3	7.4				7.4	3.6	6.5		.2	10.0	1444
	15-17	.4	8.0				8.0	3.5	2.3		.4	6.2	1414
	18-20	.5	8.3				8.3	3.1	4.3			7.3	587
	21-23	.4	10.4				10.4	4.3	13.3			17.6	276
TOTALS		.2	8.1				8.1	6.3	11.6		.1	17.0	7463

ATA PR[illegible]KANC
SAF ETAC
AIR EATH[illegible]SERVICE/ MC

2

WEATHER CONDITIONS

47271 | CA P PAGE AAF KOREA/CHICHON | 51-56,61-72 | JUL
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND, OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JUL	00-02	,7	15,4				15,4	2,7	,3			3,1	293
	03-05	,4	13,8				13,8	15,5	6,2			17,7	530
	06-08	,4	10,9				10,9	22,7	13,9			33,0	1464
	09-11	,1	10,7				10,7	10,5	11,3			20,5	1456
	12-14	,6	9,9				9,9	5,4	3,5			8,7	1430
	15-17	1,0	10,0				10,0	4,4	2,0		,1	6,3	1403
	18-20	1,3	11,3				11,3	4,?	,8		,?	5,?	594
	21-23	1,4	13,7				13,7	1,4				1,4	291
TOTALS		,7	12,0				12,0	8,4	4,8		,0	12,0	7461

2

DATA PROCESSING AND ANALYSIS BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

43271 | CAMP PAGE AAF (KOREA/CHUNCHON) | 51-54,56,61-72 | JUL
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS.
JUL	00-02		21.2				21.2	6.7	3.0			9.1	372
	03-05	.5	21.5				21.5	29.5	8.5			33.0	613
	06-08	1.0	22.6				22.6	40.7	13.1			46.5	1470
	09-11	.3	22.3				22.3	22.7	12.1			31.7	1465
	12-14	.5	19.2				19.2	11.3	4.4			14.8	1435
	15-17	.6	17.3				17.3	8.0	2.5			10.0	1416
	18-20	.5	16.9				16.9	8.6	1.5			9.5	652
	21-23	1.3	19.9				19.9	6.7	1.9			8.6	372
TOTALS		.6	20.1				20.1	16.8	5.9			20.4	7803

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

WEATHER CONDITIONS

43271 STATION | CAMP PAGE AAF KOREA/CHUCHON STATION NAME | 51-54,56,61-71 YEARS | AUG MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
AUG.	00-02	.5	12.1				12.1	17.2	1.3			18.5	372
	03-05	.1	16.0				16.0	37.7	4.0			38.3	626
	06-08	1.1	16.6				16.6	46.4	10.5			50.1	1400
	09-11	.7	15.6				15.6	24.2	14.1			33.1	1376
	12-14	.4	14.1				14.1	6.9	5.2		.1	11.1	1357
	15-17	.9	15.2				15.2	6.4	1.5			7.2	1336
	18-20	.7	13.6				13.6	7.0	1.0			7.8	604
	21-23	.3	10.1				10.1	9.9	2.9			12.8	375
TOTALS		.7	14.2				14.2	19.4	5.1		.0	22.4	7446

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/ MAC

2

WEATHER CONDITIONS

47277	CAMP PAGE AAF KOREA/CHUNCHON	51-54,59,61-71	SEP
STATION	STATION NAME	YEARS	MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
SEP	00-02	.3	10.6				10.6	15.8	11.4			26.9	360
	03-05	.2	9.7				9.7	37.6	3.5			40.8	595
	06-08	.1	11.3				11.3	46.1	7.3			48.8	1361
	09-11		10.7				10.7	31.7	11.1			38.4	1356
	12-14	.6	9.7				9.7	6.5	5.0			10.6	1331
	15-17	.3	10.5				10.5	4.5	1.5			5.7	1301
	18-20	.2	10.0				10.0	5.3	6.0			11.2	571
	21-23		10.3				10.3	10.8	16.9			26.7	360
TOTALS		.2	10.4				10.4	19.8	7.8			26.1	7237

ATA PROCESSING AND
SAF ETAC
AIR WEATHER SERVICE/MAC

2

WEATHER CONDITIONS

43271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,58,60-71	OCT
STATION	STATION NAME	YEARS	MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
OCT	00-02	.3	10.5				10.5	16.[illegible]	15.9			30.9	333
	03-05		6.5				6.5	37.[illegible]	8.9			43.1	617
	06-08		4.4		.1		4.5	53.4	13.7			57.7	1435
	09-11	.1	4.2				4.2	41.1	18.8			51.[illegible]	1434
	12-14		4.4				4.4	6.1	12.5			16.9	1396
	15-17	.1	4.2				4.2	1.[illegible]	3.0			4.1	1350
	18-20	.2	5.6				5.6	2.[illegible]	8.3		.3	10.[illegible]	603
	21-23	.3	5.0				5.0	7.4	21.1			26.4	337
TOTALS		.1	6.0		.0		6.0	20.8	12.8		.0	30.1	7507

2

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

43271 | CAPE PAGE AAF MISSOURI/CHRISTMAS | 51-54,56-71 | | MONTH

STATION | STATION NAME | YEARS

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN &/OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
[illegible]	00-02	.4	4.4		1.1	.7	6.7	14.1	14.9			27.8	27[illegible]
	03-05		7.0		.8		7.9	28.0	12.6			35.9	616
	06-08		7.4		.8		8.2	38.9	13.9			45.2	1232
	09-11		5.6		.6		6.2	33.7	22.8			48.5	1282
	12-14		6.2		.7		6.9	12.7	18.6			29.2	1247
	15-17	.1	7.1		1.6		8.6	6.4	8.5			14.6	1223
	18-20	.2	6.2		.6		6.7	8.4	13.6			21.3	536
	21-23	1.1	4.4		.4		4.8	8.1	17.8			25.9	270
TOTALS		.2	6.1		.8	.1	7.0	18.8	15.3			31.1	6730

ATM PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

43271 | CAMP PAGE AAF KOREA/CHUNCHON | 61-63,66-71 | | DEC
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & OR DRIZZLE	SNOW AND OR SLEET	HAIL	% OF OBS WITH PRECIP	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS
DEC	00-02		5.4		4.6		9.6	11.3	23.8			34.6	240
	03-05		3.3		5.1		8.3	15.7	18.8			31.8	600
	06-08		2.8	.2	5.9		8.5	23.3	25.4			40.0	1282
	09-11		1.7	.2	6.9		8.7	25.0	40.5			53.7	1267
	12-14		2.1		5.6		7.5	9.3	28.5			34.9	1233
	15-17		2.5		5.1		7.4	4.8	17.2		.3	20.8	1184
	18-20		3.3		4.2		7.6	9.6	24.1		.2	31.1	543
	21-23		2.1		1.7		3.8	7.5	23.8			31.0	239
TOTALS			2.9	.1	4.9		7.7	13.3	25.3		.1	34.7	6594

PART A ATMOSPHERIC PHENOMENA

This summary is a presentation of the percentage of days with occurrence of various atmospheric phenomena. These data are obtained from all recorded information on the reporting forms or from hourly data and combined into a daily observation.

The descriptions of the phenomena in the Weather Conditions Summary above also apply for the categories summarized in these daily tabulations. However, it should be noted that in this summary the columns headed "% OF OBS WITH PRECIP" and "% OF OBS WITH OBST TO VISION" show the percentage of days rather than the percentage of observations. Since more than one type of precipitation or more than one type of obstruction may occur in the same daily observation, the sum of the values in the individual categories may differ from the total columns.

A percent value of ".0" in the table indicates less than .05 percent, which is usually only one occurrence.

This presentation is by month with annual totals, and is prepared with all years combined.

NOTES: (1) A day with rain and/or drizzle was not separately reported in the WBAN data prior to year 1949. Therefore, percentages in this column are restricted to the period Jan 1949 and later.

(2) A day with freezing rain and/or freezing drizzle is also properly reported as a day with rain and/or drizzle.

(3) A day with dust and/or sand is included in this summary only when visibility is reduced to less than 5/8 mile.

874-29960

2

WEATHER CONDITIONS

STATION | STATION NAME | YEARS | MONTH

MONTH	HOURS LST	THUNDER STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & OR DRIZZLE	SNOW AND OR SLEET	HAIL	% OF OBS WITH PRECIP	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS
[illegible]	DAILY		[illegible]		[illegible]		[illegible]	[illegible]	[illegible]			[illegible]	[illegible]
[illegible]		[illegible]	[illegible]		[illegible]		[illegible]	[illegible]	[illegible]			[illegible]	[illegible]
[illegible]			32.3		21.5		[illegible]	21.5	64.5			67.7	[illegible]
[illegible]		1.1	30.0		1.1		30.0	20.[illegible]	65.6			67.[illegible]	[illegible]
[illegible]		[illegible]	37.[illegible]				37.6	10.[illegible]	40.9			51.[illegible]	93
[illegible]		10.2	55.1				55.1	24.[illegible]	14.3			32.7	[illegible]
[illegible]		7.[illegible]	66.9				66.9	50.[illegible]	22.6			56.5	124
[illegible]		6.[illegible]	56.5				56.5	70.2	19.4			71.[illegible]	124
[illegible]		[illegible]	37.7				37.7	76.5	52.9			80.7	119
OCT		5.7	63.9				63.9	81.7	75.2		.9	89.9	109
[illegible]			33.3		[illegible].1	3.0	38.4	55.[illegible]	77.8			80.[illegible]	99
DEC			15.5		30.4		39.0	34.2	58.1			92.4	79
TOTALS		3.1	34.[illegible]		[illegible].[illegible]	.2	41.3	40.4	57.4		.1	72.2	1191

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART B PRECIPITATION, SNOWFALL & SNOW DEPTH

B

This part of the Uniform Summary consists of eight summaries derived from daily observations as follows:

1. The first set presents, in three tables, the percentage frequency of various daily amounts of PRECIPITATION, SNOWFALL, and SNOW DEPTH. The daily amount summary is prepared by month and annual, all years combined, and includes percent of days with measurable amounts; percent of days having none, traces, and given amounts; and means, greatest and least monthly amounts. (The last three statistics are omitted from the snow depth summary because of their doubtful and limited value.) A total count of valid observations is given for months and annual. Stations are included in which a portion or all of the period may contain months with missing days. This will be noted on the summary pages. A percent value of ".0" in these daily amount tables indicates less than .05 percent which is usually only one occurrence.

2. The second set of three tables presents the extreme daily amounts, by individual year and month, of PRECIPITATION, SNOWFALL, and SNOW DEPTH for the entire period of record available. Also provided are the means and standard deviations for each month and annual (all months) and the total valid observation count. An asterisk (*) is printed in any year-month block when the extreme value is based on an incomplete month (at least one day missing for the month). When a month has valid observations reported but no occurrences, zeros are given in the tables as follows:

EXTREME DAILY PRECIPITATION	".00"	equals none for the month (hundredths)
EXTREME DAILY SNOWFALL	".0"	equals none for the month (tenths)
EXTREME DAILY SNOW DEPTH	"0"	equals none for the month (whole inches)

3. The third set of two tables provides the total monthly amounts of PRECIPITATION and SNOWFALL for each year-month and annual. Also prepared are the means, standard deviations, and total number of valid observations for each month and annual (all months). An asterisk (*) is printed in each data block if one or more days are missing for the month. No occurrences for a month are indicated in the same manner as in the extreme tables above. If a trace becomes the extreme or monthly total in any of these tables it is printed as "TRACE."

Continued on Reverse Side

NOTES: (1) The above studies may also be prepared for stations operating for less than full months for portions or all of the period of record. This may include stations operating 5 or 6 days a week and those with only random days missing. An asterisk (*) in the data blocks will give an indication that a month is incomplete. Please refer to Station History at front of book and observation counts in each summary to evaluate the amounts of data missing.

(2) Hail was included in snowfall occurrences in the summary of day observations prior to Jan 56, but these occurrences have been removed from snowfall category and counted as Hail in these summaries.

(3) Snow Depth was recorded and punched at various hours during the period available from U. S. operated stations. The hours used by each service for each period are as follows:

Air Force Stations:		U. S. Navy and National Weather Service (USWB)	
Beginning thru 1945	at 0800LST	Beginning thru Jun 52	at 0030GMT
Jan 46-May 47	at 1230GMT	Jul 52-May 57	at 1230GMT
Jun 57-present	at 1200GMT	Jun 57-present	at 1200GMT

S74-29961

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF
(FROM DAILY OBSERVATIONS)

STATION | STATION NAME | YEARS

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS.	MONTHLY AMOUNTS (INCHES)		
PRECIP	NONE	TRACE	.01	.02-.05	.06-.10	.11-.25	.26-.50	.51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4					
SNOW DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN																		
FEB																		
MAR																		
APR																		
MAY																		
JUN																		
JUL																		
AUG																		
SEP																		
OCT																		
NOV																		
DEC																		
ANNUAL																		

1210 WS FORM JUL 64 0-15-5 (OL1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

PRECIPITATION
(FROM DAILY OBSERVATIONS)

43271 STATION — CAMP PAGE AAF KOREA/CHUNCHON STATION NAME — 51-56, 66-72 YEARS

24 HOUR AMOUNTS IN INCHES

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
51		.24	.60	1.32	.36	1.85	4.59	2.89	4.80	2.09	.83	.52	
52	.09	.04	1.35	1.31	.76	1.87	2.85	1.50	.28	1.85	.88	.42	2.85
54	.21	2.07	.28	.86	.55	1.48	3.13	2.71	1.68	.61			
55				.43		3.07							
56				.58		1.97	5.00	.95	3.91				
66									3.42	1.59	1.42	.15	
67	.40	1.14	1.63	.98	1.05	1.05	7.81						
MEAN	.23	.87	.97	.91	.68	1.88	4.68	2.01	2.82	1.34	1.04	.36	2.85
S.D		.931	.631	.367	.296	.674	1.979	.939	1.818	.650			
TOTAL OBS	93	113	124	180	124	180	155	124	180	124	90	93	1550

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

PRECIPITATION
FROM DAILY OBSERVATIONS

43271 STATION — CAMP PAGE AAF KOREA/CHUNCHON STATION NAME — 51-56, 66-72 YEARS

24 HOUR AMOUNTS IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
51											.31	.87	PRECIP
						0	0	0	0	0	7	17	DAYS
52	.11												PRECIP
	15												DAYS
54											.14		PRECIP
											13		DAYS
55					.60								PRECIP
					29								DAYS
56					.66					.02			PRECIP
					29					10			DAYS
66													PRECIP
										0	0	0	DAYS
67													PRECIP
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
68													PRECIP
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
69													PRECIP
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
70													PRECIP
		0	0	0	0	0	0	0	0	0	0	0	DAYS
71													PRECIP
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
72								1.27	1.71				PRECIP
								29	23	0	0	0	DAYS
MEAN		.07	.98	.93	.89			3.66	3.38	3.03	1.26	.08	PRECIP
S D		24	26	26	26	0	0	27	23	25	24	25	DAYS
TOTAL OBS.	1.10	.91	.53	3.97	1.68	.47	3.97	3.87	1.96	.42	.31	.15	PRECIP
	20	24	20	26	26	23	27	26	26	27	24	20	DAYS

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

PRECIPITATION
FROM DAILY OBSERVATIONS

43271 STATION — CAMP PAGE AAF KOREA/CHUNCHON STATION NAME — 51-56, 66-72 YEARS

24 HOUR AMOUNTS IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
71	.05	.78	.18	.05	.72	1.64	2.39	3.81	6.87	1.17	1.05	.48	PRECIP
	24	24	24	25	23	24	24	20	22	26	23	23	DAYS
71	.20	.39	.86	.59	1.10	1.35	4.32	1.97	4.07	.52	.19	.36	PRECIP
	24	22	27	26	23	20	26	26	25	25	23	24	DAYS
72	1.10	.28	.76	1.00	.82	.52	1.60						PRECIP
	25	23	25	25	26	26	25						DAYS
MEAN													
S.D.													
TOTAL OBS.													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

2

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF
(FROM DAILY OBSERVATIONS)

STATION | STATION NAME | YEARS

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO. OF OBS.	MONTHLY AMOUNTS (INCHES)		
PRECIP	NONE	TRACE	.01	.02-.05	.06-.10	.11-.25	.26-.50	.51-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4					
SNOW-DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120					
JAN	67.9	21.0	5.2		3.7									0.7	6	0.2	0.7	1.7
FEB	73.4	17.0	2.4	5.2	1.2	1.2		1.7						11.0	5	0.2	11.5	0.2
MAR	79.4	13.1	4.2	1.1	1.1									0.4	7	1.0	7.3	0.1
APR	93.3	0.7													15	TRACE	TRACE	0.0
MAY	100.0														155	0.0	0.0	0.0
JUN	100.0														150	0.0	0.0	0.0
JUL	100.0														155	0.0	0.0	0.0
AUG	100.0														155	0.0	0.0	0.0
SEP	100.0														150	0.0	0.0	0.0
OCT	100.0														124	0.0	0.0	0.0
NOV	99.3	0.7													22	TRACE	TRACE	0.0
DEC	71.7	17.7	5.5	4.4										11.3	62	1.3	7.5	TRACE
ANNUAL	90.7	4.3	1.3	1.0	0.7	0.1		0.1						3.2	1401	11.5		

1210 WS FORM JUL 64 0-15-5 (OL1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOWFALL
(FROM DAILY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 51-56, 64, 68-72 (YEARS)

24 HOUR AMOUNTS IN INCHES

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL	AUG.	SEP.	OCT.	NOV.	DEC	ALL MONTHS
52		5.0	.6	TRACE	.0	.0	.0	.0	.0	.0	.0	.9	
53	1.7	.3	1.9	.0	.0	.0	.0	.0	.0	.0	TRACE	TRACE	1.9
54	2.3	1.6	.1	.0	.0	.0	.0	.0	.0	.0			
55				.0		.0							
56				.0	.0	.0	.0	.0	.0				
64					.0	.0	.0	.0	.0	.0	TRACE		
MEAN	2.00	2.30	.87	TRACE	.00	.00	.00	.00	.00	.00	TRACE	.43	1.90
S.D				.000	.000	.000	.000	.000	.000	.000			
TOTAL OBS.	62	85	93	150	155	180	155	155	150	124	90	62	1461

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOWFALL
(FROM DAILY OBSERVATIONS)

43271 STATION — CAMP PAGE AAF STATION NAME — KUREA/CHUNCHON — 51-56, 64, — 68-72 YEARS

24 HOUR AMOUNTS IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN.	FEB.	MAR.	APR	MAY	JUN	JUL	AUG	SEP.	OCT.	NOV.	DEC.	ALL MONTHS
51											5.0	3.0	SNOFALL
						0	0	0	0	0	7	17	DAYS
52	1.0												SNOFALL
	15												DAYS
54											.0		SNOFALL
											13		DAYS
55					.0								SNOFALL
					29								DAYS
56										.0			SNOFALL
										10			DAYS
68													SNOFALL
										0	0	0	DAYS
61													SNOFALL
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
62													SNOFALL
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
63													SNOFALL
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
64													SNOFALL
		0	0	0								0	DAYS
65													SNOFALL
	0	0	0	0	0	0	0	0	0	0	0		DAYS
66													SNOFALL
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
67													SNOFALL
	0	0	0	0	0	0	0	0	0	0	0	0	DAYS
68			3.5						.0	.9	TRACE	1.0	SNOFALL
		0	26	0	0	0	0	0	24	27	24	25	DAYS
69	10.0	6.0	5.0	TRACE	.0	.0	.0	.0	.0	.0	.1	3.8	SNOFALL
	26	24	28	26	27	29	27	26	26	27	24	20	DAYS
MEAN													
S.D.													
TOTAL OBS.													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOWFALL
(FROM DAILY OBSERVATIONS)

47271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 51-56, 64, 68-72 (YEARS)

24 HOUR AMOUNTS IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN.	FEB.	MAR.	APR.	MAY	JUN	JUL	AUG.	SEP.	OCT.	NOV	DEC.	ALL MONTHS
70	.9	3.0	2.6	.0	.0	.0	.0	.0	.0	.0	TRACE	2.8	SNOFALL
	24	24	24	26	24	25	25	24	25	27	23	23	DAYS
71	1.9	1.0	5.0	.0	.0	.0	.0	.0	.0	.0	.0	3.1	SNOFALL
	24	22	27	26	23	26	26	26	25	25	23	24	DAYS
72	3.2	3.8	3.1	TRACE	.0	.0	.0						SNOFALL
	25	23	25	25	26	26	25						DAYS
MEAN													
S.D.													
TOTAL OBS													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DAILY AMOUNTS

PERCENTAGE FREQUENCY OF

(FROM DAILY OBSERVATIONS)

STATION | STATION NAME | YEARS

	AMOUNTS (INCHES)													PERCENT OF DAYS WITH MEASURABLE AMTS	TOTAL NO OF OBS	MONTHLY AMOUNTS (INCHES)		
PRECIP	NONE	TRACE	.01-.04	.05-.14	.15-.24	.25-.34	.35-.44	.45-.64	.65-1.00	1.01-2.50	2.51-5.00	5.01-10.00	10.01-20.00	OVER 20.00			MEAN	GREATEST	LEAST
SNOWFALL	NONE	TRACE	0.1-0.4	0.5-1.4	1.5-2.4	2.5-3.4	3.5-4.4	4.5-6.4	6.5-10.4	10.5-15.4	15.5-25.4	25.5-50.4	OVER 50.4						
SNOW DEPTH	NONE	TRACE	1	2	3	4-6	7-12	13-24	25-36	37-48	49-60	61-120	OVER 120						
JAN																			
FEB																			
MAR																			
APR																			
MAY																			
JUN																			
JUL																			
AUG																			
SEP																			
OCT																			
NOV																			
DEC																			
ANNUAL																			

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOW DEPTH
FROM DAILY OBSERVATIONS

43271 STATION — CAMP PAGE AAF KOREA/CHUNCHON STATION NAME — 51-56, 60-72 YEARS

DAILY SNOW DEPTH IN INCHES

MONTH / YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
51		5	1	0	0	0	0	0	0	0	0	1	
52	2	TRACE	0	0	0	0	0	0	0	0	0	0	2
53	1	1	0	0	0	0	0	0	0	0			
55				0		0							
56				0	0	0	0	0	0				
60										0	0	1	
61	6	4	0	0	0	0	0	0	0	0	0	TRACE	6
62	1	1	TRACE	0	0	0	0	0	0	0	0	3	3
63	3	TRACE	TRACE	0	0	0	0	0	0	0	TRACE	TRACE	5
64		6	0	0	0	0	0	0	0	0	0	0	
65	3	1	1	0	0	0	0	0	0	0	0		
66	3		5	0		0	0	0	0	0	3	0	
67		2	0	0	0	0	0						
MEAN	3.0	2.0	.7	.0	.0	.0	.0	.0	.0	.0	.3	.6	4.0
S D	1,915	2,121	1,567	.000	.000	.000	.000	.000	.000	.000	1,000	1,061	1,826
TOTAL OBS.	217	254	310	300	310	360	341	310	300	310	270	248	3590

USAF ETAC FORM JUL 84 0-88-5 (OL1)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

SNOW DEPTH
FROM DAILY OBSERVATIONS

43271 STATION — CAMP PAGE AAF KOREA/CHUNCHON STATION NAME — 51-56, 60-72 YEARS

DAILY SNOW DEPTH IN INCHES
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
51												2	3 SNC DPTH
						0	0	0	0	0	7	17	DAYS
52	1												SNC DPTH
	15												DAYS
54											0		SNC DPTH
											13		DAYS
55					0								SNC DPTH
					29								DAYS
56										0			SNC DPTH
										10			DAYS
66		5			0								SNC DPTH
		27			30								DAYS
67								0	0	0	0	0	SNC DPTH
	0							29	26	26	26	26	DAYS
68		TRACE	2	0	0	0	0	0	0	1	TRACE	TRACE	SNC DPTH
		20	26	26	26	25	26	27	24	27	24	25	DAYS
69	20	20	3	0	0	0	0	0	0	0	TRACE	4	SNC DPTH
	26	24	26	26	27	25	27	26	26	27	24	24	DAYS
70	4	3	2	0	0	0	0	0	0	0	0	2	SNC DPTH
	26	24	25	26	24	25	25	24	25	27	23	23	DAYS
71	2	0	3	0	0	0	0	0	0	0	0	4	SNC DPTH
	24	22	27	26	23	26	26	26	25	25	23	24	DAYS
72	5	6	0	0	0	0	0						SNC DPTH
	25	23	25	25	26	26	25						DAYS
MEAN													
S D.													
TOTAL OBS.													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART C SURFACE WINDS

Presented in this part are various tabulations of surface winds as follows:

1. Extreme Values - Peak Gusts: Derived from daily observations and presented by individual year and month for the entire period of record available. Speeds are presented in knots, while directions are given in 16 compass points from the beginning of record through June 1968, and in tens of degrees starting in July 1968. The extreme is selected and printed from available peak gusts for each year-month, however an asterisk (*) is printed in the data block if less than 90% (3 or more missing observations) of the peak gusts are available for the month. An ALL MONTHS value is presented when every month of the year has valid observations. Means and standard deviations are also computed when four or more values are present for any column. A total raw count of valid observations is presented for each month and ALL MONTHS.

   DATA NOT AVAILABLE

   NOTE: According to Federal Metecrological Handbook No. 1 specifications (formerly Circular N), "peak gust data are recorded only at stations with continuous instantaneous wind-speed recorders."

2. Bivariate percentage frequency tabulations: Derived from hourly observations, these tabulations are a percentage frequency of wind directions to 16 compass points and calm by wind speeds (knots) in increments of Beaufort classifications. Percentages are shown by both directions and speed, and in addition the mean wind speed is given for each direction.

   A separate category is provided on the form for variable winds, which are reported in some data sources. In these data where light and variable winds are reported with no directions but with speeds given, the speeds will be summarized in the appropriate groups opposite the column headed VRBL.

   a. Three tables are prepared for ALL WEATHER surface winds, all years combined, by: (1) Annual - all hours combined, (2) By month - all hours combined, and (3) By month - by standard 3-hour groups.

   b. A separate annual table is also presented for surface winds meeting INSTRUMENT CLASS conditions as follows: Ceiling 200 through 1400 feet inclusive with visibility equal to or greater than 1/2 mile, and/or visibility 1/2 through 2-1/2 miles inclusive with ceiling equal to or greater than 200 feet.

   NOTE: A percentage frequency of ".0" in these tables represents one or more occurrences amounting to less than ".05" percent.

C

S74-29962

DATA PROCESSING AGENCY
USAFETAC/USAF
FIFTH WEATHER WING/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47272	CAMP PAGE AAF KOREA/CHUNCHON	51-56,60-72	ALL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	2.7	.9	.1	.0							5.9	4.8
NNE	1.2	1.6	.9	.2	.0							3.9	5.4
NE	.8	1.4	1.5	.4	.0							4.0	6.6
ENE	.1	.3	.5	.1	.0							1.0	7.0
E	.3	.3	.2	.0	.0							.9	5.4
ESE	.1	.2	.0	.0	.0							.4	4.5
SE	.7	.9	.2	.0								1.7	4.4
SSE	.5	.7	.2	.0								1.4	4.7
S	1.3	2.4	1.3	.2	.0							5.3	5.5
SSW	.9	1.6	1.6	.3	.0							4.3	6.6
SW	1.2	3.1	3.0	1.3	.1	.0						9.5	7.4
WSW	.5	1.3	1.9	.6	.0	.0						4.3	7.6
W	.8	1.2	1.2	.4	.0	.0						3.6	6.7
WNW	.4	.3	.2	.1	.0							1.0	5.5
NW	.9	.9	.3	.1	.0	.0						2.2	4.8
NNW	.8	.8	.3	.1	.0							1.9	4.7
VARBL	1.5	.3										1.8	2.8
CALM												46.3	
	14.1	20.2	15.3	3.9	.2	.0						100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 84775

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	52-54,61-72	10
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	1.9	.4									4.0	4.0
NNE	1.2	1.2	.3									2.7	4.1
NE	.4	.5	.9	.1								1.7	5.6
ENE	.0	.1	.3									.4	8.0
E	.2	.1	.0									.4	4.2
ESE	.1	.1	.0									.2	3.8
SE	.7	.5	.0									1.2	3.7
SSE	.6	.6	.1	.0								1.3	4.0
S	1.4	1.5	.8	.0								3.7	4.9
SSW	1.0	1.7	1.6	.4	.0							4.7	6.5
SW	.9	3.0	4.6	1.5	.1							10.0	7.8
WSW	.5	1.3	2.1	.7	.0	.1						4.7	7.9
W	.6	1.1	1.5	.5	.0							3.7	7.4
WNW	.4	.1	.1	.1								.8	5.9
NW	.7	.5	.1	.0								1.4	4.1
NNW	.8	.7	.2	.0								1.7	4.4
VARBL	1.3	.2										1.4	2.8
CALM												56.3	
	12.0	14.9	12.6	3.4	.2	.1						100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 6517

DATA PROCESSING BRANCH
2 TAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4327/1	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-72	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.7	2.8	.8	.0								6.3	4.3
NNE	1.0	1.2	.5	.0								2.7	4.8
NE	.5	.8	.7	.1								2.1	5.8
ENE	.1	.2	.3									.6	6.3
E	.2	.2	.0									.4	4.0
ESE	.1	.2	.0									.4	4.6
SE	.6	.8	.1									1.5	4.2
SSE	.4	.5	.2	.0								1.1	4.7
S	1.5	2.5	.8	.1								4.9	4.9
SSW	1.1	1.3	1.9	.7	.0							4.9	7.0
SW	1.0	3.5	5.1	1.9	.0							12.1	7.5
WSW	.4	1.3	3.3	1.1	.0							6.0	8.4
W	.2	.7	1.2	.5	.0							2.9	7.4
WNW	.3	.1	.3	.0								.8	5.8
NW	.8	.5	.2	.1								1.6	4.6
NNW	1.0	.8	.2	.0								2.0	4.1
VARBL	1.0	.2										1.2	2.9
CALM												48.4	
	14.7	17.8	15.7	4.4	.1							100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 6037

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

93271	CAMP PAGE AAF, JREA/CHUNCHON	52-54,61-77	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	1.7	.7	.2	.0							4.6	4.9
NNE	1.1	1.5	.9	.2								3.5	5.5
NE	.5	1.1	1.1	.6								3.3	7.2
ENE	.0	.2	.5	.2								.9	8.5
E	.2	.3	.2	.0								.7	5.6
ESE	.1	.2	.0									.4	4.1
SE	.7	.8	.1	.0								1.7	4.6
SSE	.6	1.1	.4	.1								2.1	5.2
S	.9	2.1	1.4	.3								4.8	6.1
SSW	.9	2.0	2.8	.8	.0							6.5	7.3
SW	.9	2.8	5.9	2.7	.2							12.5	8.6
WSW	.5	1.4	3.1	1.1	.2							6.2	8.7
W	.6	1.1	2.2	.6	.1	.0						4.6	7.9
WNW	.2	.5	.4	.1	.0							1.3	7.4
NW	.9	.7	.2	.0								1.8	4.3
NNW	.7	.7	.5	.1								1.9	5.4
VARBL	1.6	.4										2.0	2.9
CALM												41.1	
	12.4	18.4	20.4	7.1	.5	.0						100.0	4.1

TOTAL NUMBER OF OBSERVATIONS 6739

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	52-56,61-72	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

ALL
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	2.3	1.1	.2	.0							5.4	5.2
NNE	.9	1.2	1.2	.3	.0							3.6	5.3
NE	.5	1.4	2.0	.8	.0							4.7	7.7
ENE	.2	.3	.9	.2	.0							1.6	8.6
E	.3	.6	.4	.2	.0							1.5	6.5
ESE	.1	.2	.1		.0							.4	5.1
SE	.3	1.2	.3	.0								2.1	5.0
SSE	.3	.7	.2	.1								1.5	4.7
S	.9	1.9	1.2	.2	.0							4.4	6.5
SSW	.9	1.8	2.3	.7	.0							5.7	7.1
SW	1.1	1.3	4.6	2.6	.2	.1						12.2	8.6
WSW	.4	1.1	2.3	1.2	.1	.0						5.1	8.7
W	.6	1.3	1.5	.7	.1	.0						4.2	8.0
WNW	.4	.3	.3	.2								1.2	6.4
NW	.7	.8	.6	.3	.0	.0						2.5	6.8
NNW	.9	.5	.2	.0	.0							1.7	4.6
VARBL	2.3	.4										2.6	2.8
CALM												39.7	
	12.9	19.8	19.4	8.0	.6	.2						100.0	4.2

TOTAL NUMBER OF OBSERVATIONS 7250

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47277	CAMP PAGE AAF KOREA/CHUCHUN	52-56,61-72	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	2.3	1.1	.1								5.3	5.1
NNE	.9	1.3	.9	.3								3.4	5.9
NE	.6	1.1	1.7	.5								4.0	7.1
ENE	.1	.3	.5	.1								.9	7.6
E	.3	.4	.1									.8	4.6
ESE	.1	.2	.0									.4	4.3
SE	.4	1.0	.3	.0								1.8	4.9
SSE	.6	.6	.3	.0								1.5	4.8
S	1.1	2.0	1.6	.3								5.0	5.9
SSW	1.1	2.5	2.6	.9	.1							7.2	7.2
SW	1.2	3.9	5.8	2.2	.1							13.2	7.9
WSW	.5	1.6	2.3	.6	.0	.0						5.1	7.7
W	.8	1.5	1.4	.5	.1							4.3	7.0
WNW	.4	.3	.2	.1								1.1	6.0
NW	.7	.9	.3	.2								2.1	5.3
NNW	.7	.8	.3	.0								1.8	4.9
VARBL	2.4	.4										2.8	2.8
CALM												38.8	
	13.2	21.9	19.6	5.8	.3	.0						100.0	4.0

TOTAL NUMBER OF OBSERVATIONS 7462

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	51-56,61-72	JUN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

ALL
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	4.5	1.5	.3								8.6	5.2
NNE	1.3	2.2	1.4	.2								5.1	5.5
NE	.7	1.9	2.2	.5	.0							5.2	6.9
ENE	.1	.4	.6	.1								1.2	7.2
E	.3	.7	.5	.1								1.6	6.4
ESE	.2	.2	.1	.0								.5	5.4
SE	.5	1.0	.2	.0								1.8	4.7
SSE	.4	.8	.3	.0								1.6	4.9
S	1.4	3.4	1.7	.2								6.7	5.5
SSW	.6	2.1	2.1	.5	.0							5.5	6.7
SW	1.0	3.9	3.4	.6								8.9	6.6
WSW	.6	1.9	1.4	.2								4.1	6.1
W	.9	1.9	.8	.1								3.8	5.2
WNW	.6	.4	.1	.0								1.1	3.9
NW	.8	1.4	.8	.1								3.2	5.3
NNW	.8	1.2	.6	.1								2.7	5.0
VARBL	2.0	.5										2.5	2.9
CALM												36.0	
	14.0	28.0	17.7	3.1	.0							100.0	3.7

TOTAL NUMBER OF OBSERVATIONS 7458

DATA PROCESSING BRANCH
PTAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHUN	51-54,56,61-72	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	3.7	1.4	.2								7.7	5.[illegible]
NNE	1.3	2.1	1.2	.2								4.7	5.3
NE	.8	2.3	2.2	.4								5.7	6.6
ENE	.1	.5	.6	.1								1.4	6.9
E	.1	.3	.3	.0								.7	6.1
ESE	.1	.2	.0									.3	4.5
SE	.4	1.4	.4	.0								2.2	5.2
SSE	.5	1.1	.4	.0								1.9	5.1
S	1.5	4.4	2.9	.4								9.2	6.0
SSW	.9	2.2	1.6	.4	.0							5.1	6.3
SW	1.9	4.4	3.1	.5	.0							10.0	6.0
WSW	.6	1.7	1.0	.1								3.4	5.9
W	.7	1.2	.4	.0								2.4	4.8
WNW	.4	.5	.0									.9	3.8
NW	1.0	1.4	.4	.1								2.9	4.7
NNW	.8	1.0	.4	.0								2.2	4.7
VARBL	.7	.4										1.1	3.2
CALM												38.9	
	14.3	28.6	16.5	2.3	.1							100.0	3.5

TOTAL NUMBER OF OBSERVATIONS 7801

DATA PROCESSING BRANCH
USAFETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,56,61-71	A.G
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.5	3.8	1.2	.2								7.5	4.8
NNE	1.3	2.2	1.1	.2	.0							4.8	5.4
NE	1.2	2.1	2.0	.4	.0							5.8	6.3
ENE	.1	.4	.5	.1								1.1	7.3
E	.2	.3	.2	.1								.8	6.0
ESE	.1	.2	.0									.3	4.5
SE	.7	.9	.2	.0								1.8	4.5
SSE	.4	.8	.4	.1								1.6	5.5
S	1.3	3.4	2.1	.4								7.3	6.0
SSW	1.0	2.1	1.8	.2	.0							5.1	6.0
SW	1.3	3.5	2.6	.6	.0							8.0	6.4
WSW	.7	1.4	1.1	.1		.0						3.3	6.0
W	.7	1.3	.4	.1								2.5	5.1
WNW	.3	.3	.1	.0								.7	4.6
NW	1.1	1.2	.2	.0								2.5	4.2
NNW	.6	1.3	.3	.0								2.2	4.8
VARBL	1.2	.3										1.5	2.9
CALM												43.0	
	14.6	25.5	14.2	2.5	.1	.0						100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 7446

DATA PROCESSING BRANCH
FTAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47273	CA P PAGE AAF KUNSAN/CHUNCHON	51-54,56,61-71	SEP
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

ALL
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.7	4.3	1.4	.2								8.7	4.9
NNE	2.0	2.9	1.7	.1								6.7	5.2
NE	1.5	1.8	2.3	.3								5.8	6.2
ENE	.3	.4	.4	.1								1.2	5.9
E	.5	.3	.2	.0								1.1	4.6
ESE	.1	.2	.0									.3	4.4
SE	1.0	.6	.2									1.9	4.0
SSE	.6	.5	.1	.0								1.3	4.3
S	1.4	1.9	1.0	.2								4.5	5.3
SSW	.7	1.3	1.2	.3	.0							3.5	6.5
SW	1.1	2.1	1.9	.4	.0							5.6	6.4
WSW	.4	.8	.7	.2								2.0	6.4
W	1.1	1.2	.7	.1								3.1	5.1
WNW	.4	.7	.1	.0								1.3	4.6
NW	1.2	1.3	.3	.0								2.8	4.4
NNW	1.2	1.3	.3	.3	.0							3.1	5.1
VARBL	1.5	.3										1.7	2.7
CALM												45.4	
	17.6	22.0	12.6	2.3	.1							100.0	2.9

TOTAL NUMBER OF OBSERVATIONS 7237

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF SOREA/CHUCHON	51-54,56,60-71	CT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

ALL
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	2.1	.5	.2								5.0	4.5
NNE	.8	1.2	1.1	.3	.0							3.6	6.4
NE	.9	1.4	1.2	.3								3.9	6.2
ENE	.4	.4	.5	.0								1.3	5.7
E	.3	.3	.1	.0								.9	4.5
ESE	.2	.2		.0								.5	4.0
SE	1.1	.6	.1									1.8	3.7
SSE	.6	.5	.1									1.4	3.7
S	2.1	1.5	.5	.0	.0							4.1	4.2
SSW	1.0	1.2	1.0	.2	.0							3.4	5.8
SW	1.1	1.9	2.0	.5	.0							5.5	6.5
WSW	.5	.7	.9	.3	.0							2.4	6.9
W	1.0	1.0	1.2	.4	.0							3.7	6.6
WNW	.6	.2	.3	.1	.0							1.2	5.3
NW	1.0	.8	.2	.1	.0							2.7	4.1
NNW	.8	.6	.2	.0								1.7	4.3
VARBL	2.1	.3										2.3	2.7
CALM												54.8	
	17.9	14.9	9.8	2.4	.1							100.0	2.4

TOTAL NUMBER OF OBSERVATIONS 7507

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHUN	51-54,60-71	V
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

ALL
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	1.5	.6	.0								4.[illegible]	4.6
NNE	1.2	1.1	.5	.1								2.9	4.5
NE	.4	1.1	1.3	.3								3.[illegible]	6.3
ENE	.2	.2	.2	.1								.7	6.0
E	.4	.1	.1									.[illegible]	3.9
ESE	.1	.1	.0									.3	4.3
SE	.6	.8	.2									1.7	4.1
SSE	.4	.5	.2									1.0	4.5
S	1.3	1.8	.7	.1								3.9	4.9
SSW	1.0	1.2	1.4	.2	.0							3.8	6.1
SW	1.0	2.3	3.0	.8	.1	.0						7.4	7.2
WSW	.5	.4	1.8	.5								3.6	7.6
W	.9	.9	1.5	.7	.1							4.1	7.6
WNW	.3	.1	.3	.1	.1							.9	6.7
NW	.8	.7	.2	.0								1.8	4.4
NNW	.4	.3	.1	.0								.9	4.6
VARBL	1.1	.1										1.2	2.8
CALM												58.0	
	13.0	13.8	12.1	2.7	.3	.0						100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 6727

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 | CAMP PAGE AND KOREA/CHUNCHON | 51-53,60-71 | OCT
STATION | STATION NAME | YEARS | MONTH

ALL WEATHER
CLASS

CONDITION

ALL
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.9	1.3	.2									3.4	3.7
NNE	.9	.9	.0	.0								1.8	3.6
NE	.4	.5	.2	.1								1.2	5.0
ENE	.1	.0	.0									.2	4.3
E	.2	.1	.0									.3	3.8
ESE	.1	.1	.0									.2	4.0
SE	.0	.3	.0									.9	3.6
SSE	.5	.5	.1									1.0	4.1
S	1.1	1.8	.4									3.3	4.5
SSW	.8	1.8	1.3	.2								4.2	6.1
SW	.9	2.0	4.5	1.2	.1							9.2	7.6
WSW	.6	1.3	3.1	1.0	.0							6.0	8.0
W	.6	1.3	2.1	.3								4.3	7.1
WNW	.4	.2	.2	.1								.7	6.3
NW	.7	.3	.1	.1								1.1	4.4
NNW	.4	.4	.0									.9	3.9
VARBL	.6	.0										.6	2.6
CALM												60.8	
	10.6	13.9	12.2	2.9	.1							100.0	2.4

TOTAL NUMBER OF OBSERVATIONS 6594

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAPE PAGE AAF KOKEA/CHICHIJI	52-54	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0000-0200
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.4	1.7										5.1	3.4
NNE	.4											.4	3.5
NE	.4											.4	3.0
ENE													
E	.4	.4										.8	3.5
ESE													
SE	.6	.8										1.7	3.5
SSE	1.3											1.3	3.0
S	2.1	2.1	.4									4.7	4.4
SSW	.4	1.3	.8									2.5	5.3
SW	1.7	3.4	3.4	.4								8.9	5.3
WSW		1.3	2.1	.8								4.2	8.3
W	.4	1.3	.8	1.3								3.8	8.1
WNW													
NW	1.3	1.3	.8									3.4	4.8
NNW	1.3	1.7	.8									3.8	5.3
VARBL													
CALM												58.9	
	14.0	15.3	9.3	2.5								100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 236

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

49274	CAPE HOE AFB KOREA/CHUCHEON	52-58,61-62,64-67,70-71	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0000-0500
HOURS (L S T)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.8	.6										3.4	3.2
NNE	.6	1.1										1.7	4.7
NE		.4										.4	4.5
ENE		.2										.2	4.0
E	.4	.4										.7	4.0
ESE													
SE	1.1	.6										1.7	3.4
SSE	.9	.2	.4									1.5	4.6
S	1.5	1.3	.2									3.0	3.7
SSW	.9		.6	.2								1.3	7.0
SW	1.5	2.0	.9	.7	.2							5.4	6.5
WSW		.7	.9	.2	.2							2.0	8.6
W	.7	1.1	.2	.4								2.4	6.0
WNW	.4	.2										.6	3.7
NW	.4	.4										.7	4.0
NNW	.9	.9	.4	.4								2.2	6.0
VARBL													
CALM												73.1	
	11.6	9.6	3.5	1.8	.4							100.0	1.4

TOTAL NUMBER OF OBSERVATIONS 542

DATA PROCESSING BRANCH
USAFETAC/USAF
ETAC WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-72	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	1.3	.4									3.9	3.9
NNE	1.4	.9	.3									2.3	3.9
NE	.5	.5	.3									1.3	4.8
ENE	.1		.1									.2	6.0
E	.2	.2										.3	3.5
ESE													
SE	.5	.3										.9	3.8
SSE	.5	.5										.9	3.7
S	1.1	.9	.2									2.2	3.9
SSW	.6	.9	.5	.1								2.1	5.5
SW	.4	1.5	1.2	.3	.1							3.4	6.8
WSW	.5	.7	.9	.2								2.3	6.3
W	.4	.8	.3	.1								1.4	5.6
WNW	.4	.1	.1									.5	3.1
NW	.5	.4										.9	3.6
NNW	.4	.6	.2									1.2	4.4
VARBL	1.0	.1										1.1	2.4
CALM												79.0	
	10.5	9.3	4.5	.6	.1							100.0	1.2

TOTAL NUMBER OF OBSERVATIONS 1280

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-54,61-72	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0900-1100
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	1.9	.4									4.4	3.9
NNE	2.0	1.8	.4									4.1	3.9
NE	.7	.7	.2									1.6	4.4
ENE	.1		.1									.2	6.0
E	.2		.2									.3	6.5
ESE	.2	.1										.3	3.3
SE	.4	.9										1.3	3.8
SSE	.5	.2										.8	3.1
S	.7	1.1	.7									2.5	5.2
SSW	1.0	1.0	.9									3.6	5.1
SW	.4	1.4	2.0	.7								4.5	7.8
WSW	.0	.9	.9	.3	.1	.1						2.9	7.1
W	.4	.4	.2	.2								1.2	6.3
WNW	.3			.1								.4	4.2
NW	.9	.5										1.4	3.4
NNW	1.1	.9										2.0	3.6
VARBL	2.4	.1										2.5	2.7
CALM												66.2	
	19.6	12.4	5.9	1.3	.1	.1						100.0	1.7

TOTAL NUMBER OF OBSERVATIONS 1279

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-72	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	2.0	.4									4.8	3.9
NNE	1.5	1.6	.2									3.5	3.7
NE	.4	.4	.6	.2								1.6	6.8
ENE			.6									.6	9.9
E	.3	.2										.5	3.4
ESE		.3	.1									.4	4.8
SE	.8	.6										1.4	3.4
SSE	.2	.8										1.0	4.4
S	1.7	1.4	1.2	.2								4.4	5.2
SSW	1.7	2.2	2.4	.7	.1							7.1	6.7
SW	1.0	2.6	5.0	1.9	.1							10.5	8.2
WSW	.6	1.1	2.7	.2		.2						4.9	8.2
W	.7	.8	1.8	.5	.2							3.9	8.0
WNW	.3		.1	.4								.8	9.0
NW	.6	.0	.1	.1								1.4	4.5
NNW	1.0	1.0	.3									2.3	4.3
VARBL	1.6	.5										2.1	3.0
CALM												48.6	
	14.9	16.3	15.5	4.2	.3	.2						100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 1242

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHUN	52-54,61-72	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER (CLASS)

1300-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.7	.6									3.4	5.1
NNE	1.0	1.0	.6									2.6	4.6
NE		.4	.4	.2								1.0	7.8
ENE	.1	.3	.8									1.2	8.0
E	.1		.1									.2	5.0
ESE	.3											.3	3.0
SE	.6	.2	.1									.8	3.7
SSE	.4	.8	.2	.1								1.4	5.0
S	1.5	1.4	1.4	.1								4.3	5.4
SSW	.6	3.2	3.2	1.0								8.0	7.4
SW	.9	4.9	10.6	4.1	.1							20.7	8.5
WSW	.5	2.4	5.0	1.9								9.9	8.5
W	.6	1.4	3.2	1.1	.1							6.4	8.5
WNW	.6	.3	.5	.2								1.5	6.6
NW	.5	.7	.5									1.7	5.2
NNW	.7	.7	.3									1.6	4.3
VARBL	1.5	.3										1.9	3.1
CALM												33.1	
	10.9	19.6	27.6	8.7	.2							100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 1185

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 52-54,61-67 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	1.0	.2									1.5	5.0
NNE		1.2	.2									1.3	5.1
NE		.0	.2									.3	5.5
ENE													
E	.2											.2	3.0
ESE													
SE	.6	.6	.2									1.3	4.3
SSE	1.2	2.3										3.5	3.9
S	1.7	3.1	1.2									6.0	4.7
SSW	1.7	2.1	1.7	.8								6.3	6.2
SW	1.5	7.3	9.6	1.2								19.6	6.9
WSW	.6	2.3	1.7	.8								5.4	7.3
W	1.2	3.7	4.4	.4								9.6	6.5
WNW	.4	.8	.2									1.3	4.6
NW	1.3	.4										1.7	3.1
NNW	.2		.2									.4	5.5
VARBL													
CALM												41.0	
	11.0	25.2	19.8	3.1								100.0	3.6

TOTAL NUMBER OF OBSERVATIONS 520

DATA PROCESSING BRANCH
ETAC/USAF
4TH WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-54 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.7	3.4										8.2	3.6
NNE	.4											.4	3.0
NE	.9	.4	.4									1.7	4.5
ENE													
E													
ESE													
SE	1.3	.4	.4									2.1	4.2
SSE	2.1	.4										2.6	3.2
S	1.7	4.3	.9									6.9	4.8
SSW	.4	1.3	.9									2.6	5.8
SW	1.3	4.3	3.4	1.3								10.3	6.7
WSW		1.3	2.1	1.7								5.2	8.8
W	.9	1.7	2.1	.4								5.2	6.9
WNW													
NW	1.7	.4										2.1	3.4
NNW	1.3											1.3	3.0
VARBL													
CALM												51.5	
	16.7	18.0	10.3	3.4								100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 233

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KUREA/CHUCHUN (STATION NAME) 52-54 (YEARS) APR (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L S T))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	5.1	3.1	1.2									9.4	4.1
NNE	.4											.4	3.0
NE		.4										.4	4.0
ENE	.4	.4										.8	4.0
E	.4											.4	3.0
ESE													
SE	2.0	1.2										3.1	3.6
SSE	1.2		.8									2.0	4.8
S	3.1	2.4	.8									6.3	4.4
SSW	1.2	1.6	.4	.8								3.9	6.5
SW	1.6	3.1	2.0									8.6	5.4
WSW		.4	1.2	.4								2.0	8.2
W	.4	.4										.8	3.5
WNW													
NW	1.2	.8										2.0	3.4
NNW	1.6	2.0	.4									3.9	4.3
VARBL													
CALM												56.1	
	18.4	17.6	6.7	1.2								100.0	2.1

TOTAL NUMBER OF OBSERVATIONS 255

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61,64-67,70-71	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0300-0500
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.6	3.0	.6									6.2	4.3
NNE	.8	1.2										2.0	3.9
NE	.4	.8	.2									1.4	4.1
ENE	.4	.2										.6	3.3
E	.2	.4										.6	3.7
ESE	.4		.2									.6	4.3
SE	.2	.2										.4	4.0
SSE	.2	.4										.6	4.0
S	1.2	1.2	.2									2.6	4.2
SSW	1.0	.0	1.0	.6								3.2	6.4
SW	2.0	1.0	2.0	.6								6.2	6.1
WSW	.2	.4	.8	.2								1.6	7.9
W	.4	.2	.4									1.4	5.3
WNW													
NW	1.0	1.0	.8									2.8	5.1
NNW	1.0	.4										1.4	3.6
VARBL	.6											.6	2.3
CALM												67.5	
	12.7	12.1	6.2	1.4								100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 496

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-54,61-72	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.2	3.2	.9									8.4	4.1
NNE	1.6	1.6	.1									3.3	3.7
NE	.9	.9	.3									2.1	4.0
ENE	.2	.1										.3	3.7
E	.3	.3										.5	3.5
ESE	.1	.2										.3	4.7
SE	.5	.1										.6	3.1
SSE	.2											.2	3.0
S	1.1	1.2	.3									2.7	4.4
SSW	.9	.5	1.1	.2	.1							2.8	6.4
SW	1.1	1.4	1.7	.3								4.6	6.2
WSW	.3	.9	.6	.2								2.0	6.3
W	.6	.1	.5	.2								1.4	6.1
WNW	.3	.2	.3									.7	5.6
NW	.9	.5	.3	.1								1.8	4.7
NNW	1.1	.4	.1									1.6	3.6
VARBL	.4	.1										1.0	2.8
CALM												66.0	
	12.2	11.2	6.3	.9	.1							100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 1101

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-72	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0900-1100
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.9	3.4	.9									8.1	3.9
NNE	2.1	2.4	.6									5.1	4.3
NE	.7	.9	.3	.1								2.0	5.0
ENE	.1	.1	.2									.3	6.0
E	.3											.3	3.0
ESE	.2	.1										.3	3.0
SE	.3	.9	.1									1.3	4.5
SSE	.5	.3										.8	3.1
S	1.4	1.2	.5	.1								3.2	4.8
SSW	1.0	.9	1.1	.3								3.4	5.9
SW	1.3	2.3	2.2	.7								6.5	6.5
WSW	.1	.9	1.2	.4								2.6	8.2
W	.4	.3	.5									1.2	5.4
WNW	.5	.2	.1									.8	3.6
NW	.9	.3	.3	.1								1.5	4.6
NNW	1.2	.8	.3	.1								2.3	4.1
VARBL	1.7											1.7	2.5
CALM												58.8	
	10.5	14.7	8.3	1.7								100.0	2.0

TOTAL NUMBER OF OBSERVATIONS 1162

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-72	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L S T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	3.0	.9									5.2	4.8
NNE	.8	1.2	.8	.1								2.9	5.5
NE	.7	.5	.7	.1								2.0	5.7
ENE	.2	.1	.7									1.0	7.2
E		.3	.1									.4	5.3
ESE	.2	.4	.1									.6	5.0
SE	.4	.9	.1									1.3	4.4
SSE	.4	1.1	.2	.1								1.8	5.0
S	2.0	4.4	1.1	.2								7.8	5.0
SSW	.9	1.1	2.6	.9								5.5	7.7
SW	1.1	2.3	5.4	2.6	.1							11.5	8.9
WSW	.5	1.4	3.4	1.9								7.1	8.6
W	1.0	.8	1.2	.7	.1							3.8	7.6
WNW	.4	.4	.2	.2								1.1	6.1
NW	.8	.5	.3	.1								1.7	4.8
NNW	.9	1.2	.3	.1								2.5	4.3
VARBL	1.6	.6										2.2	3.1
CALM												41.7	
	14.1	20.2	17.9	8.9	.2							100.0	3.9

TOTAL NUMBER OF OBSERVATIONS 1134

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CA P PROV AAF KOREA/CHUCHON	52-54,61-72	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1500-1700
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.0	1.0									4.9	4.9
NNE	.5	.5	1.1	.1								2.2	6.4
NE	.2	.8	1.7	.2								2.9	7.4
ENE		.3	.5									.8	7.0
E	.2		.1									.3	4.7
ESE		.2	.1									.5	5.2
SE	.3	.8	.1									1.2	4.5
SSE	.5	.3	.6									1.5	5.4
S	.4	2.0	1.1	.2								4.2	5.6
SSW	1.2	2.3	3.7	1.6								8.8	7.8
SW	2.3	4.5	9.8	4.8	.1							21.5	8.3
WSW	.5	2.0	9.4	3.0	.1							15.1	9.0
W	.5	1.4	2.9	1.4								6.1	8.4
WNW	.1	.1	.7	.1								1.0	7.6
NW	.4	.4	.1	.1								.9	5.2
NNW	.5	1.0	.4									1.9	4.4
VARBL	.8	.4										1.2	3.2
CALM												25.6	
	10.0	18.7	33.4	11.5	.2							100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 1094

DATA PROCESSING BRANCH
USAFETAC/USAF
ETAC WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

93271	CAMP PAGE AAF KOREA/CHUNCHEON	52-54,61-67	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1400-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	1.5	.2	.2								2.3	5.7
NNE	.2	.4	.4									1.0	6.2
NE		.8	1.5									2.3	7.6
ENE		.6	.2									.8	6.5
E		.4										.4	5.0
ESE		.4										.4	4.5
SE	.6	2.1	.2									3.1	4.4
SSE	.4	1.0	.4									1.9	4.9
S	1.2	3.2	1.5									7.0	5.0
SSW	1.2	2.1	1.5	.4								5.2	6.0
SW	4.1	12.1	12.9	2.9	.2							30.2	7.1
WSW	.4	3.1	5.6	.2								9.4	7.5
W		1.9	1.9	.4								4.2	7.6
WNW	.6		.6									1.2	5.7
NW	.2	.4										.6	4.3
NNW	.4	.2										.6	3.7
VARBL													
CALM												28.3	
	8.1	32.3	28.9	4.2	.2							100.0	4.7

TOTAL NUMBER OF OBSERVATIONS 480

ATA PROCESSING BRANCH
USAFETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	52-54	
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

2300-2300
HOURS (L S T)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.7	4.3	.4									7.5	4.2
NNE			.8									.8	9.0
NE	.4	.4	1.2									2.0	6.4
ENE			.8									.8	8.5
E													
ESE													
SE	3.5	2.7										6.3	3.9
SSE		1.6										1.2	4.0
S	2.4	4.3	1.2									7.8	5.0
SSW	1.6	2.0	2.0	.4								5.9	5.9
SW	3.1	0.7	5.5	.4								13.7	6.1
WSW	.8	1.2	1.2									3.1	5.8
W	.4	.4	.8	.4								2.0	7.4
WNW													
NW	2.0	.4										2.4	3.2
NNW	2.0	1.2										3.1	3.8
VARBL													
CALM												41.6	
	18.8	24.7	13.7	1.2								100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 255

DATA PROCESSING BRANCH
HQ TAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	52-54	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0000-0200
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.5	1.4										3.9	3.5
NNE	.4			.4								.7	8.0
NE	.7	2.9	.4	.4								4.3	5.0
ENE		.4	.4	.4								1.1	9.0
E													
ESE													
SE	1.6	2.9										4.7	4.0
SSE	1.1	1.8	.4	.7								3.9	6.1
S	1.4	2.2										3.6	4.1
SSW	1.1	1.1	1.4									3.6	6.1
SW	1.4	3.6	6.1	1.8								12.9	7.1
WSW		1.8	.4									2.2	5.5
W	.7	.4	.7									1.8	5.0
WNW	.7	.4		.4								1.4	5.5
NW	3.2	2.2										5.4	3.4
NNW	1.8	.4	1.4	.4								3.9	5.6
VARBL													
CALM												46.6	
	10.8	21.1	11.1	4.3								100.0	2.9

TOTAL NUMBER OF OBSERVATIONS 279

DATA PROCESSING BRANCH
PTAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHUN	52-54,61,64-67,70-71	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0300-0500
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.7	1.7	.4									5.7	3.7
NNE	.9	.4	.7									2.0	3.5
NE	.6	.7	.7	.4								2.4	6.7
ENE		.4	.6									.9	6.6
E	.4											.4	3.0
ESE	.2	.7										.9	4.6
SE	.7	.9										1.3	3.7
SSE	.7	1.1	.4									2.2	4.8
S	1.3	.7	.4									2.4	4.6
SSW	.7	1.3	.7									2.8	5.5
SW	.4	1.9	1.3	.4	.2							4.1	7.1
WSW	.7	.9	1.1	.6								3.0	7.6
W	.7	.6	.7	.2								2.2	6.2
WNW		.4	.2									.6	5.0
NW	.9	.4										1.3	3.3
NNW	.4		.4	.2								.9	7.4
VARBL	.4	.2										.6	3.0
CALM												66.3	
	16.8	11.3	7.6	1.7	.2							100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 540

DATA PROCESSING BRANCH
USTAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-54,61-72	FEB
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0100-0500
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	1.7	.7									5.1	4.2
NNE	1.9	2.3	.3	.1								4.6	4.3
NE	.1	1.1	.0	.3								2.5	6.4
ENE	.1	.2	.2									.5	6.7
E	.2											.2	2.3
ESE	.1	.1										.2	3.0
SE	.8	.3										1.1	3.6
SSE	.2	.6	.2									.9	4.8
S	.7	1.4	.8									2.8	5.2
SSW	1.1	1.3	1.1	.2								3.8	6.0
SW	.7	1.3	1.4	.2								3.6	6.3
WSW	.2	1.0	.9	.4								2.5	7.3
W	.3	.4	.6									1.3	6.5
WNW	.2	.2	.2									.5	5.9
NW	.8	.4										1.2	3.2
NNW	.3	.6	.2	.2								1.3	5.7
VARBL	1.7	.1										1.8	2.6
CALM												65.2	
	12.7	13.4	7.3	1.5								100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 1305

DATA PROCESSING BRANCH
USAFETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-72	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0300-1100
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.5	2.5	1.0	.1								6.1	4.5
NNE	1.8	2.5	1.0	.1								5.4	5.0
NE	.8	.8	1.2	.5								3.2	6.9
ENE		.1	.2	.1								.4	8.2
E	.2	.1										.2	3.7
ESE	.2	.2	.1									.5	4.1
SE	.4	.5	.2	.1								1.2	5.3
SSE	.9	.8	.4									2.1	4.6
S	.8	1.2	1.4									3.5	5.8
SSW	.5	1.8	1.6	.3								4.3	6.7
SW	.5	1.5	2.3	.6								5.0	7.4
WSW	.4	1.0	2.1	.2	.3							4.0	8.4
W	.9	.5	1.2	.5								3.0	6.9
WNW	.2	.3	.2									.8	12.9
NW	1.3	.5	.2									2.0	3.7
NNW	1.5	.9		.2								2.5	3.9
VARBL	3.2	.3										3.5	2.8
CALM												52.3	
	16.3	15.7	12.8	2.6	.3							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 1303

DATA PROC SSTN BRANCH
HQ TAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-72	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1200-1400
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	2.1	.9	.6								5.3	5.9
NNE	.9	.6	1.3	.6								3.4	6.7
NE	.5	.9	.9	.6								2.8	7.4
ENE	.1	.2	.5	.3								1.1	8.8
E	.1	.4	.3									.8	6.0
ESE	.2	.4										.6	3.9
SE	.6	.9	.5	.1								2.0	5.6
SSE	.5	.9	.4	.1								1.9	5.8
S	.9	3.1	1.8	.5								6.4	6.4
SSW	.9	2.7	3.7	1.5								8.8	7.2
SW	1.3	3.1	5.9	3.3	.2							13.8	8.7
WSW	.6	1.4	3.5	1.9	.2							7.6	9.0
W	.6	1.5	2.2	.7	.1	.2						5.7	8.4
WNW	.4	1.1	.6	.2	.2							2.4	7.0
NW	.6	1.1	.3									2.2	4.6
NNW	.9	.9	.5	.1								2.3	5.1
VARBL	2.4	1.3										3.8	3.2
CALM												29.2	
	13.5	22.8	23.3	10.4	.6	.2						100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 1272

DATA PROCESSING BRANCH
USAF/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-54,61-72	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1700
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.7	.2	.4	.1							2.1	6.5
NNE	.2	1.1	.9	.2								2.5	6.8
NE	.3	1.0	1.9	.6								3.9	7.9
ENE		.2	.9	.1								1.1	8.4
E	.2	.6	.5	.2								1.5	6.7
ESE		.1										.1	4.0
SE	.2	.2	.2									1.1	4.8
SSE	.4	.8	.4	.1								1.7	5.7
S	.7	1.9	1.9	.6								5.2	7.2
SSW	1.1	2.7	6.0	1.7								11.5	8.0
SW	.6	4.0	11.9	6.7	.4							23.6	9.5
WSW	.7	2.0	6.7	2.6	.6							12.7	9.2
W	.3	1.8	5.5	1.6	.2							9.6	8.7
WNW	.2	.7	.9	.2								2.0	7.2
NW	.6	.4	.3	.1								1.4	5.2
NNW	.4	.7	.8									1.9	6.1
VARBL	1.1	.2										1.4	2.8
CALM												16.8	
	6.2	19.6	39.0	15.1	1.3							100.0	6.9

TOTAL NUMBER OF OBSERVATIONS 1233

DATA PROCESSING BRANCH
ITAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	52-54,61-67	AR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1800-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2	1.7	.8									2.7	6.1
NNE		.9	.8									1.7	6.7
NE	.4	.9	1.7	.0								3.0	8.0
ENE		.2	1.1	.4								1.7	9.6
E	.4	.6	.4									1.3	5.4
ESE			.2									.2	7.0
SE	1.1	.6										1.7	3.8
SSE	.6	.8	.9									2.3	5.8
S	1.1	4.2	2.5	.6								8.3	6.0
SSW	.8	1.3	4.0	1.3	.2							7.6	8.4
SW	1.1	6.1	15.9	5.9	.4							29.4	8.7
WSW	.6	2.3	6.5	1.5								10.8	8.2
W	.4	2.1	3.8	.9								7.2	7.4
WNW		.8	.2									.9	5.6
NW	.2	.6	.4	.4								1.5	7.8
NNW	.2	.2	.4									.8	5.5
VARBL													
CALM												18.2	
	7.0	23.1	39.5	11.6	.6							100.0	6.3

TOTAL NUMBER OF OBSERVATIONS 527

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 52-54,71 (YEARS) AR (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	1.1	1.8									4.6	5.2
NNE	.7	.4	.7									1.8	5.0
NE		2.9	1.4	1.4								5.7	7.6
ENE			.7	.7								1.4	10.5
E		.4										.4	5.0
ESE	.4											.4	3.0
SE	1.4	3.9										5.0	4.3
SSE	1.8	6.8	.4									8.9	4.6
S	2.1	5.0	2.9	1.1								11.1	6.0
SSW	.4	3.6	1.8	.4								6.1	6.3
SW	2.5	4.3	7.1	3.9								17.9	8.1
WSW	.4	.7		.4								1.4	6.8
W	.7	1.4	1.1	.4	.4							3.9	6.9
WNW	.4	.4		.4								1.1	7.7
NW		1.8	.4									2.1	5.0
NNW			1.4	.4								1.8	9.4
VARBL													
CALM												26.4	
	12.5	32.1	19.6	8.9	.4							100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 280

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KUREA/CHUCHON	52-54	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0000-0200
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.0	3.7	1.1	.4								8.2	5.2
NNE	1.1	1.9	.7	.4								4.1	5.5
NE	.4	.7	1.5									2.6	6.9
ENE	.4											.4	3.0
E		.4										.4	4.0
ESE	.4	1.1										1.5	3.8
SE	2.0	1.1										3.7	3.5
SSE	1.5	1.9										3.3	4.1
S	1.5	2.0	.7									5.2	4.9
SSW	.7	.7	.4		.4							2.2	6.8
SW	1.5	1.1	3.3	.4								6.3	7.1
WSW		.7		.4								1.1	8.0
W	.4		.4									.7	5.0
WNW	.4											.4	3.0
NW	1.5	.4	.4	.4								2.6	5.1
NNW	1.1	.4										1.5	3.8
VARBL													
CALM												55.8	
	19.9	17.1	8.6	1.9	.4							100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 269

DATA PROCESSING BRANCH
USAF/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-54,61,64-67,70-71	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0300-0500
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	2.3	.9									4.5	5.0
NNE	1.3	1.1	.9									3.4	4.8
NE	.8	1.7	.6	.2								3.2	5.6
ENE		.4	1.1									1.5	8.4
E		.2	.2									.4	6.0
ESE	.2	.4	.2									.8	5.3
SE	.6	.2										.8	3.3
SSE	.6	1.1	.4									2.3	4.4
S	.6	1.1	.6									2.3	4.8
SSW	1.1	.2	.4									1.7	4.1
SW	.9	1.3	2.3	.4								4.9	6.9
WSW	.2		.4	.2								.8	8.3
W	.2	.9	.2	.2								1.1	6.7
WNW		.2	.4									.6	7.0
NW	.6	.8										1.5	4.0
NNW	1.7	.4										2.1	3.2
VARBL	.6											.6	2.7
CALM												67.4	
	11.2	11.9	8.5	.9								100.0	1.7

TOTAL NUMBER OF OBSERVATIONS 528

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

ATA PROCESSING BRANCH
USAFETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) | OSAN AB (STATION NAME) | 52-55,61-72 (YEARS) | ANN (MONTH)

ALL WEATHER (CLASS) | 0700-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	2.9	1.0	.2								6.3	4.2
NNE	1.7	2.2	1.0	.1								4.9	4.4
NE	.8	1.7	1.3	.3								4.1	6.3
ENE	.1	.2	.3									.6	6.3
E	.3	.5	.1									1.0	4.6
ESE	.1	.2										.3	3.8
SE	.5	.4	.3									1.2	4.8
SSE	.5	.2		.1								.8	4.3
S	1.0	1.0	.7	.1								3.5	6.9
SSW	1.0	1.0	.8	.1								2.9	5.2
SW	1.0	1.4	1.0	.6								4.0	6.3
WSW	.3	.3	.3	.2								1.1	6.6
W	.2	.3	.3									.8	5.8
WNW	.4	.1										.6	3.3
NW	.9	.0	.1									1.6	3.9
NNW	1.0	.3	.2									1.5	4.0
VARBL	1.6	.1										1.7	2.3
CALM												63.1	
	18.6	19.1	7.5	1.6								100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 1432

AIR PROCESSING BRANCH
TAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF CHUNCHON	52-56,61-72	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0900-1100
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.8	2.4	.7	.1	.1							6.1	4.5
NNE	.8	1.7	1.3	.7								4.5	6.3
NE	.4	1.1	2.1	.6	.1							4.3	7.9
ENE	.1	.3	.7	.3								1.4	8.8
E	.4	.4	.5	.1								1.3	5.9
ESE		.1	.1		.1							.2	10.3
SE	.3	1.4	.4									2.1	5.0
SSE	.4	.3	.1	.1								1.1	4.8
S	1.3	1.3	1.5	.2	.1							4.4	6.0
SSW	.8	1.3	.9	.4								3.5	6.6
SW	.9	1.8	2.1	1.4	.1							6.2	7.8
WSW	.5	1.0	.9	.1								2.6	6.4
W	1.3	.9	.6	.1	.1							3.0	5.3
WNW	.1	.4	.1	.1								1.3	4.5
NW	1.1	.6	.4	.1								2.5	5.2
NNW	1.7	1.0	.4	.1	.1							3.3	4.6
VARBL	4.4	.2										4.6	2.6
CALM												47.3	
	18.0	16.8	12.8	4.0	.3							100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 1409

DATA PROCESSING BRANCH
ETAC/USAF
FIFTH WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-56,61-72	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1200-1400
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	3.1	1.1	.1								6.1	5.0
NNE	1.0	.6	1.4	.4	.1							3.5	7.0
NE	.1	1.1	2.8	1.0								5.4	8.9
ENE	.4	.2	.9	.4	.1							1.9	8.2
E	.6	1.0	.6	.2	.1							2.4	6.6
ESE	.1	.3	.1									.4	5.2
SE	.6	1.2	.2	.1								2.1	4.8
SSE	.2	.6	.6	.1								1.5	6.3
S	.7	1.9	1.3	.3								4.3	7.4
SSW	1.1	3.1	3.7	.7								8.3	7.0
SW	.9	3.1	4.9	3.6	.4	.1						13.2	9.6
WSW	.6	1.4	1.8	1.8	.1							5.9	8.7
W	.9	2.2	1.2	1.0	.3	.1						5.4	8.0
WNW	.4	.5	.4	.1								1.5	6.0
NW	.6	1.3	.6	.7	.1	.1						3.4	7.7
NNW	.3	.9	.0									1.3	5.3
VARBL	3.0	.9										4.4	3.0
CALM												27.6	
	13.9	23.3	22.2	11.2	1.1	.3					1	100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 1406

AT... PROCESSING ...
...TAC/USA...
...IR ... EAT... SERVICE/ ...C

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47277	CAMP PAGE AAF KOREA/CHUCHON	52-56,61-72	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1500-1700
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.9	1.5	.1	.1							4.5	6.0
NNE	.3	.9	1.5	.4								3.0	7.5
NE	.3	1.2	2.6	.9								5.2	8.1
ENE		.4	1.3	.4	.1							2.7	9.2
E	.1	.7	.7	.4								1.9	7.9
ESE	.1	.1	.1									.4	4.5
SE	.1	.0	.3	.1								1.2	6.0
SSE	.3	.6		.1								1.0	4.5
S	.4	1.2	1.7	.4								3.7	7.5
SSW	.9	2.0	4.5	1.8	.1							9.3	8.2
SW	1.1	5.4	8.3	6.4	.4	.2						21.9	9.2
WSW	.4	1.9	6.5	3.1	.4	.1						12.4	9.5
W	.6	1.1	4.4	1.8	.2	.1						8.2	9.5
WNW	.4	.4	.7	.4								1.9	7.8
NW	.1	.7	1.2	.6	.1	.1						2.9	9.7
NNW	.4	.1	.1	.1								.7	5.7
VARBL	1.9	.8										2.7	3.2
CALM												16.9	
	8.3	20.3	35.8	16.3	1.4	.5						100.0	7.0

TOTAL NUMBER OF OBSERVATIONS 1368

...TIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-56,61-67	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1,00-20,00
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	,5	1,2	,9	,9								3,5	7,7
NNE		,4	[illegible]	,2								1,[illegible]	8,2
NE	,7	1,9	[illegible]	,7								5,[illegible]	6,8
ENE		,2	1,4	,5								2,1	9,3
E	,2	1,2	,9	,4								2,6	7,1
ESE		,2										,2	5,0
SE	,4	1,2	,7									2,3	6,1
SSE	,9	,2	,5									1,6	4,7
S	1,1	3,0	1,4	,4								5,[illegible]	5,9
SSW	,7	3,3	2,6	1,6	,2							8,4	7,7
SW	1,6	6,4	14,1	5,2	,7							30,9	8,5
WSW	,2	2,5	5,3	1,0								9,7	8,7
W	,2	3,9	3,3	1,4								8,8	7,9
WNW		,2	,2	,4								,7	11,0
NW	,2	,5	,9	,5								2,1	8,4
NNW	,2	,2										,4	4,5
VARBL													
CALM												14,1	
	6,7	28,9	35,1	14,8	,9							100,0	6,8

TOTAL NUMBER OF OBSERVATIONS 569

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF SUREA/CHUCHON	52-54	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

2100-2300
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	1.9	3.0	.7								7.1	6.8
NNE		.4										.4	6.0
NE	.4	2.2	2.6	1.1								6.3	7.3
ENE													
E	.4											.4	3.0
ESE	.4	.7										1.1	3.7
SE	.7	8.6	1.5									10.8	4.9
SSE	2.2	5.2										7.4	4.0
S	2.2	6.9	1.9	.4								13.4	5.4
SSW	.7	1.9	3.0									5.6	6.9
SW	1.9	6.3	3.7	1.1								13.0	6.5
WSW	.4	.4	.4									1.1	6.0
W	.7	1.1	.4									2.2	5.0
WNW	.4		.4	.7								1.5	9.3
NW	1.1	.4	.7	.4								2.6	6.1
NNW	1.1	.4										1.5	3.8
VARBL													
CALM												25.7	
	14.1	38.3	17.5	4.5								100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 269

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

03271	CAPE PAGE AAF [illegible]/CHURCH	52-54	[illegible]
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0000-0200
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.9	3.7	1.1									10.7	4.4
NNE			.7									.7	9.0
NE		1.1	2.2	.4								3.6	7.7
ENE			.4									.4	7.0
E	1.4	.4										1.8	3.2
ESE		1.1										1.1	5.0
SE	1.4	2.9	.4									4.7	4.2
SSE	2.2	.4	.7									3.2	4.1
S	4.9	2.5	.7									6.1	4.4
SSW	.4	.7	1.4									2.5	7.0
SW	1.1	2.2	.7									3.9	5.1
WSW													
W	.4	.4										.7	3.5
WNW	.4											.4	3.0
NW	3.9	1.1										5.0	3.3
NNW	1.1	1.8	.7									3.6	5.3
VARBL													
CALM												51.6	
	19.0	20.1	9.0	.4								100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 279

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAPE PAUL AAF KOREA/CHUCHE'S	52-54,61,64-67,70	JAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0300-0500
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.2	3.3	.4	.2								8.1	4.1
NNE	1.0	2.1	.0									3.6	4.7
NE	.4	1.2	.4									1.9	5.5
ENE	.2	.2	.6									1.0	6.6
E	.4	.2										.6	3.3
ESE	.4	.2										.6	3.3
SE	.6	1.3										1.9	4.3
SSE	1.0	.6	.4									1.9	4.5
S	1.3	1.7	.8	.4								4.2	5.3
SSW	.4	1.0	.0	.2								2.1	6.0
SW	.4	.8	.0	.2								2.1	6.6
WSW	.2	.4	.4									1.0	6.6
W	.0	.2										.2	3.0
WNW	.2											.2	3.0
NW	1.7	1.5										3.3	3.8
NNW	1.2	1.0	.4									2.5	4.4
VARBL	.2											.2	2.0
CALM												64.1	
	14.2	15.5	5.2	1.0								100.0	1.7

TOTAL NUMBER OF OBSERVATIONS 521

USTA PROCESSING RANGE
USAFETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	52-56,61-72	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.5	2.9	1.0	.1								6.4	4.5
NNE	2.3	2.5	1.2									6.0	4.6
NE	1.3	1.4	.7									3.4	4.9
ENE	.1	.2	.3									.6	6.9
E	.5	.2										.7	3.4
ESE	.1	.1										.2	3.7
SE	.1	.7	.1									.9	4.5
SSE	.7	.6	.3									1.6	4.6
S	1.0	1.8	.7									3.4	4.9
SSW	.7	1.1	.7	.1								2.6	5.7
SW	.5	.7	.6	.1								2.0	6.1
WSW	.1	.1	.3									.4	7.2
W	.3	.3										.5	3.5
WNW	.2											.2	3.0
NW	.4	.4	.1									.9	4.1
NNW	.4	.6	.3	.1								1.4	4.9
VARBL	2.8	.1										2.9	2.5
CALM												66.1	
	13.8	13.6	6.2	.4								100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 1473

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUCH[illegible] (STATION NAME) 52-56,61-72 (YEARS) AY (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L S T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	2.5	1.3	.1								5.7	5.1
NNE	1.4	1.4	.9	.5								4.2	5.7
NE	.5	.8	1.5	.5								3.3	7.7
ENE		.5	.3	.1								.9	7.0
E	.1	.3	.1									.5	5.3
ESE	.1	.1	.1									.2	5.7
SE	.4	.9	.3									1.6	4.9
SSE	.5	.7	.3									1.5	4.8
S	.8	2.0	1.0	.3								4.0	6.0
SSW	1.5	3.0	2.3	.5	.1							7.4	6.5
SW	1.1	3.1	1.9	.8	.1							6.9	6.6
WSW	.5	1.0	.3	.1								2.0	5.1
W	.9	.7	.6	.1								2.3	5.6
WNW	.4	.3	.2									1.0	4.6
NW	.7	1.0										1.6	3.7
NNW	1.4	1.0	.3									2.6	3.9
VARBL	4.9	.8										5.7	2.8
CALM												48.6	
	16.9	19.9	11.3	3.1	.1							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 1466

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	52-56,61-72	ANY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	2.1	1.3	.2								4.4	5.9
NNE	.1	.8	1.1	.6								2.6	8.2
NE	.3	1.0	2.4	.8								4.6	8.0
ENE	.1	.2	.3	.3								.9	8.2
E	.2	.3										.6	4.0
ESE	.3	.3	.1									.6	3.8
SE	.3	.6	.5	.1								1.4	6.2
SSE	.2	.4	.4	.1								1.1	6.4
S	1.6	2.4	2.5	.4								6.9	6.2
SSW	1.5	3.1	3.3	1.7								9.6	7.5
SW	1.9	5.4	6.9	2.9	.3							17.4	7.8
WSW	1.1	2.3	2.8	.6	.1	.1						7.0	7.4
W	1.0	2.6	1.4	1.0								6.0	6.9
WNW	.7	.9	.3	.2								2.1	5.5
NW	.4	1.2	.6	.1								2.4	5.9
NNW	.2	1.0	.3									1.6	5.8
VARBL	3.7	.7										4.4	2.9
CALM												26.5	
	14.3	25.3	24.3	9.1	.3	.1						100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 1444

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHUN	52-56,61-72	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER (CLASS)

1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.0	1.3	.1								3.7	5.8
NNE	.2	.3	.8	.4								2.3	7.6
NE	.7	1.3	2.3	.8								5.1	7.5
ENE	.1	.2	.7	.1								1.1	7.9
E	.1	.7	.4									1.3	5.9
ESE													
SE	.3	.6	.4	.1								1.3	5.9
SSE	.3	.4	.1									.8	4.4
S	.4	2.7	2.5	.6								6.2	7.0
SSW	1.0	3.4	5.1	1.6	.3							11.5	8.1
SW	1.3	6.1	13.4	5.7	.4							26.9	8.7
WSW	.5	3.0	6.6	1.9	.1	.1						12.3	8.7
W	.6	2.2	4.2	1.1	.1							8.2	8.1
WNW	.5	.3	.5	.4								1.6	7.3
NW	.5	.6	.6	.5								2.2	7.4
NNW	.4	.5	.6	.1								1.6	6.0
VARBL	1.1	.4										1.4	3.1
CALM												12.6	
	9.7	24.8	39.5	13.4	.9	.1						100.0	6.9

TOTAL NUMBER OF OBSERVATIONS 1414

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	52-56,61-67	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1800-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.7	.3	.2								2.9	5.2
NNE	.2	.7	.3	.3								1.5	6.8
NE	.2	1.2	2.9									4.3	7.4
ENE		.5	1.0									1.5	7.9
E	.5	.7	.2									1.4	4.4
ESE	.2	.3										.5	4.3
SE	.2	.5										.7	4.0
SSE	.2	.7	.3	.2								1.4	6.3
S	1.4	4.9	1.9									8.2	5.4
SSW	1.4	4.1	3.1	1.0								9.5	6.6
SW	2.0	9.0	15.7	4.1	.2							31.0	7.7
WSW	.5	4.3	4.1	1.2								10.1	7.1
W	1.4	3.7	2.9	1.2	.3							9.5	7.2
WNW		.3	.7	.2								1.2	8.1
NW	.2	.7	.7	.5								2.0	7.9
NNW	.3	.2		.2								.7	5.8
VARBL													
CALM												13.6	
	9.2	33.6	34.1	9.0	.5							100.0	6.1

TOTAL NUMBER OF OBSERVATIONS 587

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	52-54	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

2100-2300
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	3.2	.7									5.0	4.9
NNE	.4	1.1	.4									1.9	4.6
NE	.7	1.8	1.8	.7								5.0	6.9
ENE		.4	.4									.7	8.0
E		.4										.4	4.0
ESE	.4	1.4	.4									2.2	5.0
SE	3.2	6.8	1.1									11.2	4.4
SSE	2.9	1.4	.4									4.7	3.8
S	2.9	6.8	3.2									12.9	5.3
SSW	.7	2.2	2.2									5.0	6.0
SW	.4	3.2	4.3	.4								8.3	7.2
WSW		1.1		.4								1.4	6.8
W	1.8	1.8	.7									4.3	4.3
WNW													
NW	1.1	1.4	.4									2.9	4.9
NNW	1.1	1.1										2.2	3.5
VARBL													
CALM												32.0	
	16.3	34.2	15.8	1.4								100.0	3.6

TOTAL NUMBER OF OBSERVATIONS 278

DATA PROCESSED BY
ETAC/USAF
AIR WEATHER SERVICE MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

93771	CAPE PAGE AAF KOREA/CHUCHON	51-54	
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0000-0200
HOURS (L S T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	9.6	4.1									15.7	5.5
NNE	.3	2.4	1.7									4.4	6.0
NE	.3	2.7	2.4									5.5	6.4
ENE		.3	1.4	.3								2.0	9.2
E	.7	.7	.7									2.0	5.0
ESE		.3	.7									1.0	6.7
SE	1.7	2.4										4.1	3.6
SSE	1.4	.3										1.7	3.2
S	1.7	4.1	.3									6.1	4.4
SSW		.7										.7	5.0
SW	.7	.7	.3									1.7	4.4
WSW		.3										.3	4.0
W	.7	.3		.3								1.4	5.8
WNW													
NW	2.0	2.4	1.0									5.5	4.6
NNW	.7	2.4	1.7									4.8	5.6
VARBL													
CALM												43.0	
	16.8	29.7	14.3	.7								100.0	3.0

TOTAL NUMBER OF OBSERVATIONS 293

USAFETAC FORM 0-8-5 (OL-1) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AIR FORCE SURFACE WEATHER
OBSERVATION PROGRAM (USAF)
15 EAST EGLIN AFB, VICEY, NC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

93217	CAPE HATTERAS AAF MUNICIPAL/CHEROKEE	51-54,61,64-67,70	
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0200-0500
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.0	5.7	1.9									10.6	4.8
NNE	.9	3.0	1.5									5.4	5.3
NE	1.7	2.1	.8									4.5	4.7
ENE	.6		.4									.9	6.3
E	.2	.6										.8	3.5
ESE	.4	.2										.6	3.3
SE	.8	.8	.2									1.7	4.2
SSE	.8	.8	.2									1.7	4.4
S	1.9	1.3	.9									3.8	5.0
SSW	.4	.9										1.3	4.4
SW	.8	1.1	.4									2.3	4.3
WSW		.4										.4	4.5
W													
WNW		.2										.2	4.0
NW	1.1	1.3	.6									3.2	4.4
NNW	1.7	2.3	.8									4.9	4.8
VARBL													
CALM												57.9	
	19.2	21.3	7.5									100.0	2.0

TOTAL NUMBER OF OBSERVATIONS 530

AT PROCESSING GRADE
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4327	CAMP PAGE AAF KOREA/CHUNCHON	51-55,61-72	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS


0600-0800
HOURS (L S T)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	5.0	5.6	.8	.1								11.5	4.4
NNE	3.6	3.7	.8	.1								8.2	4.1
NE	1.0	2.7	1.3	.1								5.1	5.2
ENE	.3	.4	.1									.8	3.8
E	.1	.4	.1									.6	4.6
ESE	.3											.3	2.0
SE	.5	.6	.1									1.2	4.2
SSE	.3	.7	.2									1.2	4.7
S	1.2	2.9	.3									4.3	4.3
SSW	.7	1.3	.3									2.3	4.6
SW	.5	.8	.5	.1								1.9	5.4
WSW	.3	.3										.6	3.4
W	.2	.2	.1									.7	4.5
WNW	.2	.1	.1									.5	4.1
NW	.3	.8	.1									1.2	4.3
NNW	.3	1.3	.4									2.1	5.1
VARBL	1.7	.2										1.9	2.7
CALM												58.1	
	14.7	21.8	5.3	.3								100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 1462

AD-A088 949 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
CAMP PAGE AAF, CHUNCHON, KOREA. REVISED UNIFORM SUMMARY OF SURF--ETC(U)
MAR 74
UNCLASSIFIED USAFETAC/DS-80-075 NL

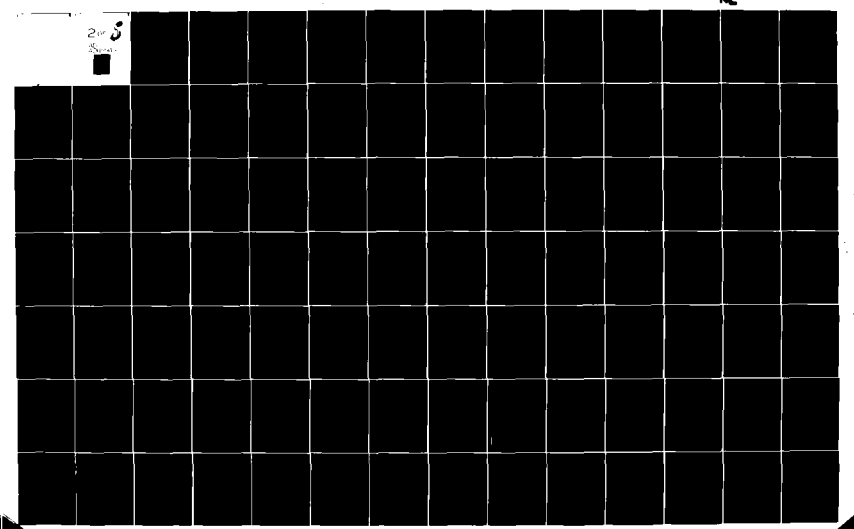

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	51-55,61-72	JUN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0900-1100
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.2	4.7	1.0	.3								9.2	4.6
NNE	1.6	2.8	1.5	.1								6.0	5.2
NE	.9	1.7	1.9	.4								4.9	6.5
ENE	.1	.3	.5	.1								.9	7.4
E	.1	.7	.3									1.1	5.7
ESE	.2	.3										.5	3.7
SE	.1	1.2	.1									1.5	4.9
SSE	.4	.7	.2									1.3	4.7
S	1.7	3.4	1.4	.1								6.7	5.3
SSW	1.2	1.9	1.4	.1								4.6	5.4
SW	.9	3.1	1.2	.3								5.5	5.8
WSW	.5	1.1	.2									1.9	4.2
W	1.3	1.4	.1	.1								3.0	4.1
WNW	1.2	.5	.1									1.9	3.3
NW	1.1	1.0	.3	.2								2.6	5.0
NNW	1.6	1.1	.4									3.1	4.0
VARBL	3.0	.5										4.1	2.7
CALM												41.9	
	19.8	26.5	10.7	1.6								100.0	2.9

TOTAL NUMBER OF OBSERVATIONS 1456

1
2

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-56,61-72 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS)

1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	3.3	1.8	.6								7.6	5.9
NNE	.5	1.5	1.5	.3								3.8	6.8
NE	.5	1.1	1.5	.5	.1							3.6	7.4
ENE	.1	.4	.6									1.0	7.2
E	.5	1.0	.9	.2								2.7	6.5
ESE	.1	.4										.6	4.3
SE	.6	1.7	.2									2.4	4.8
SSE	.5	1.0	.8									2.3	5.5
S	1.3	3.0	2.4	.2								7.6	5.9
SSW	1.2	2.8	3.5	.5	.1							8.0	6.7
SW	1.5	4.5	4.1	.5								10.6	6.4
WSW	.6	3.1	1.7	.2								5.7	5.8
W	1.2	3.2	1.6	.1								6.1	5.3
WNW	1.0	.8										1.9	3.6
NW	1.2	1.9	.8	.1								4.0	5.1
NNW	.8	.9	.6	.1								2.3	5.2
VARBL	3.4	.8										4.2	3.0
CALM												25.6	
	16.7	32.3	22.0	3.3	.1							100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 1429

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-56,61-72 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	3.2	1.1	.4								5.9	5.4
NNE	.5	.9	1.1	.3								2.8	6.8
NE	.2	1.9	3.8	.6								6.5	7.7
ENE		.3	1.1	.1								1.6	8.3
E	.2	.9	.8	.3								2.2	7.2
ESE	.1	.1	.3	.1								.6	8.0
SE	.4	.4	.3	.1								1.1	5.8
SSE	.2	.6	.1									.9	4.5
S	.8	3.8	2.7	.5								7.8	6.5
SSW	.6	3.0	4.3	1.5								9.4	7.7
SW	.9	6.8	8.0	1.6								17.2	7.3
WSW	1.4	4.1	4.4	.7								10.7	6.6
W	1.1	3.8	1.6	.3								6.8	5.7
WNW	.6	.5	.2	.1								1.4	4.9
NW	.4	1.1	1.8	.4								3.6	7.3
NNW	.3	.9	.7	.1								1.9	6.1
VARBL	1.9	1.0										2.9	3.2
CALM												16.6	
	10.6	33.4	32.5	6.9								100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 1403

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KUNEA/CHUCHON	51-56,61-67	JULY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1600-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	3.5	1.7	.5								6.7	6.0
NNE		1.0	2.4	.7								4.0	8.3
NE	.6	1.3	3.4	1.0								5.9	8.5
ENE	.3	1.0	1.0	.7								3.0	7.9
E	.2	.3	1.0	.3								1.9	8.5
ESE		.2	.3	.2								.7	8.5
SE	.2	.5	.3									1.0	5.5
SSE		1.0	.3	.2								1.5	6.7
S	1.5	3.5	2.9	.2								8.1	6.0
SSW	.2	2.0	3.2	1.2								6.6	7.8
SW	1.2	9.8	8.2	1.5								20.7	6.8
WSW	.2	2.2	2.5	.7								5.6	7.4
W	1.9	2.5	1.5	.2								6.1	5.2
WNW		.2										.2	6.0
NW	.2	2.4	1.5	.2								4.2	6.4
NNW	.2	1.2	.5	.3								2.2	6.5
VARBL													
CALM												21.7	
	7.1	32.7	30.8	7.7								100.0	5.4

TOTAL NUMBER OF OBSERVATIONS 594

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-54 (YEARS) JUNE (MONTH)

ALL WEATHER (CLASS)

2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	7.2	3.8	1.4								14.1	6.2
NNE	.3	2.4	1.7									4.5	6.8
NE		2.1	5.2	2.1								9.3	8.5
ENE	.3	.7	.3									1.4	5.5
E	.3	.7	.3									1.4	4.5
ESE		.3	.3									.7	6.5
SE	3.1	2.4	.7	.3								6.5	4.5
SSE	1.0	2.4	.7									4.1	4.6
S	4.1	6.2	.3	.3								11.0	4.4
SSW		2.7	1.4									4.1	6.2
SW	2.1	3.4	2.4	.3								8.2	5.7
WSW	.3											.3	3.0
W		1.0	.3									1.4	5.5
WNW													
NW	1.7	3.1	.3									5.2	4.5
NNW	2.1	1.4										3.4	3.5
VARBL													
CALM												24.4	
	17.2	36.1	17.9	4.5								100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 291

ATA PROCESSING BRANCH
TAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	51-54	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0000-0200
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.7	7.3	.8									10.8	4.6
NNE	.3	3.0	.8									4.0	5.2
NE	1.6	3.5	3.2									8.3	5.9
ENE	.3	.5		.3								1.1	6.3
E		1.1										1.1	5.5
ESE		.3										.3	4.0
SE	.8	1.9										2.7	4.2
SSE	1.1	2.2	.3									3.5	4.7
S	1.1	1.9	.3									3.2	4.4
SSW	.3	.3										.5	4.5
SW	2.4	4.3										6.7	3.9
WSW	.8	.5										1.3	3.6
W	.3	.3										.5	4.0
WNW	.3											.3	3.0
NW	.8	1.6	.3									2.7	5.1
NNW	.3	1.3	.8									2.4	5.8
VARBL													
CALM												50.5	
	12.4	29.8	6.5	.3								100.0	2.4

TOTAL NUMBER OF OBSERVATIONS 372

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	51-54,61,64-67,70	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0300-0500
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.6	6.5	1.0	.2								10.3	4.8
NNE	1.0	2.4	.7									4.1	4.7
NE	.8	1.8	.7									3.3	4.9
ENE	.2	.5										.7	3.8
E		.2	.2									.3	5.5
ESE	.2	.2	.2									.5	4.7
SE	.7	1.8										2.4	4.1
SSE	1.3	.7	.2									2.1	3.6
S	1.3	2.0	1.1									5.1	5.2
SSW	.8	.5	.5									1.8	5.2
SW	2.0	2.3	.3	.2								4.7	4.7
WSW		.5										.5	4.0
W													
WNW	.2											.2	2.0
NW	1.0	1.1	.3									2.4	4.9
NNW	1.0	.2	.3									1.5	4.0
VARBL	.3											.3	2.5
CALM												59.9	
	13.2	21.2	5.4	.3								100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 613

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KUREA/CHUCHON	51-54,56,61-72	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.0	3.9	1.3	.1								8.3	4.6
NNE	2.1	3.4	.6	.1								6.2	4.5
NE	1.8	2.4	1.0									5.1	4.6
ENE	.3	.4	.1									.8	4.8
E	.2	.2	.1									.5	4.8
ESE	.1	.2										.3	4.5
SE	.3	1.6	.7									2.6	5.9
SSE	.7	.9	.4	.1								2.0	5.1
S	1.8	3.2	1.6	.1								6.7	5.3
SSW	.8	1.1	.9	.1								3.0	5.9
SW	.9	1.0	.1									2.0	3.8
WSW	.1	.1										.2	3.3
W	.1	.1										.3	3.0
WNW	.2	.1										.3	2.8
NW	1.0	.7	.4	.1								2.3	4.7
NNW	.7	.9	.4									2.0	4.7
VARBL	.3											.3	2.0
CALM												57.2	
	14.4	20.0	7.8	.6								100.0	2.1

TOTAL NUMBER OF OBSERVATIONS 1478

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KUREA/CHUCHON	51-54,56,61-72	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0800-1100
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.9	4.0	1.5	.1								10.1	4.5
NNE	1.9	2.3	1.8	.1								6.1	5.3
NE	.7	1.3	1.6	.3								4.0	6.5
ENE	.1	.3	.5									1.0	6.8
E	.2	.3	.1									.6	5.0
ESE	.1	.2										.3	3.4
SE	.3	1.0	.4	.1								1.7	5.5
SSE	.5	1.1	.5									2.0	5.3
S	2.1	4.9	3.3	1.0								11.3	6.3
SSW	.8	2.1	1.2	.5								4.5	6.5
SW	1.5	3.2	.9	.1								5.7	5.0
WSW	.5	1.1	.5									2.0	5.3
W	1.0	.6	.1									1.6	3.4
WNW	.4	.5										1.0	3.6
NW	1.0	1.6	.4	.1								3.1	4.7
NNW	1.3	1.4	.3	.1								3.0	4.2
VARBL	1.5	.3										1.8	3.0
CALM												40.0	
	17.8	26.8	13.0	2.3								100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 1464

DATA PROCESSING [illegible]
ETAC/USAF
AIR WEATHER SERVICE/ MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAPE PAGE AAF KOREA/CHUCHON	51-54,56,61-72	04
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1200-1400
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	2.7	1.6									5.9	5.2
NNE	.9	1.4	1.3	.1								3.8	5.8
NE	.3	1.4	2.5	.6								4.8	7.8
ENE	.1	.0	1.1	.1								2.0	7.6
E		.2	.3									.6	6.9
ESE		.3	.1									.4	6.0
SE	.3	1.5	.5	.1								2.3	5.6
SSE	.1	.7	.5									1.3	6.1
S	1.3	5.3	4.5	.3								11.5	6.2
SSW	1.0	3.4	3.1	.3								7.9	6.5
SW	1.2	5.4	5.0	.6								12.1	6.5
WSW	1.2	2.9	1.4	.2								5.7	5.8
W	1.4	2.1	.5									4.0	4.4
WNW	.6	1.2										1.8	4.1
NW	1.0	1.5	.6									3.2	4.6
NNW	1.0	1.3	.6									2.9	4.9
VARBL	1.0	1.3										2.2	3.6
CALM												27.9	
	15.0	33.1	23.7	2.4								100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 1435

2

DATA PROCESSING BRANCH
USAFETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 — STATION
[illegible] AIR FORCE BASE [illegible] — STATION NAME
51-54,56,61-72 — YEARS
6 — MONTH
ALL WEATHER — CLASS
1200-1700 — HOURS (LST)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	2.5	1.3	.3								5.4	5.4
NNE	1.1	1.3	1.4	.4								4.2	6.3
NE	.9	1.8	2.6	.5								5.3	7.7
ENE		.8	.9	.1								1.8	7.2
E	.1	.4	.3	.1								1.0	6.8
ESE	.1	.3	.1									.5	4.0
SE	.1	1.0	.4									1.5	5.3
SSE	.2	.8	.4									1.2	5.4
S	1.3	5.3	4.4	.5								11.5	6.4
SSW	1.3	3.8	2.5	.7	.1							8.4	6.4
SW	2.3	6.4	8.3	1.5	.1							18.4	7.0
WSW	.8	3.0	3.2	.2								7.3	6.4
W	1.1	2.9	1.5									5.4	5.4
WNW	.6	.6	.1									1.3	4.1
NW	1.1	1.4	.3	.1								2.8	4.6
NNW	.4	.8	.3	.1								1.6	5.2
VARBL	1.0	.6										1.6	3.2
CALM												20.1	
	14.6	34.0	28.2	4.4	.1							100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 1414

2

DATA PROCESSING BRANCH
TAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4327	CAPE RACE ARP, NEWFOUNDLAND	51-54, 56, 61-67	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1201-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	2.0	1.4	.3								4.9	6.3
NNE	.5	.8	.6	.2								2.0	6.0
NE	.9	4.1	4.1	1.2								10.4	7.2
ENE		.6	1.2									1.8	7.4
E		.5	.3	.2								.9	7.8
ESE		.2										.2	6.0
SE		1.7	.6									2.3	5.6
SSE	.3	1.5	.2									2.0	5.2
S	1.2	5.7	2.6	.5								10.0	5.9
SSW	1.7	2.2	2.0	.5								6.3	6.1
SW	4.5	10.9	5.4	.9	.3							22.0	5.9
WSW	.8	2.2	1.2	.2								4.3	5.6
W	.9	1.4	.8	.2								2.8	5.9
WNW	.2	.2										.3	3.5
NW	1.1	1.8	.8									3.7	4.7
NNW	.5	.3		.4								1.4	4.8
VARBL													
CALM												24.7	
	15.2	36.4	21.2	4.1	.3							100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 651

AIR PROVING GROUND
ATAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

69271	CAPE PAGE AAF VERGA/CHICHUA	51-54	JUL
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

2100-2300
HOURS (L S T)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	6.7	2.4	2.7	.8								12.6	5.9
NNE	1.1	1.9	1.3	.3								4.6	5.6
NE	.5	7.8	4.8	.3								13.4	6.3
ENE		.5	.3	.5								1.3	8.0
E		.5	.3									.8	6.0
ESE													
SE	2.4	1.3										3.8	3.4
SSE	.8	3.5	.3									4.6	4.9
S	.5	3.6	.5									4.6	5.1
SSW	.3	.5		.3								1.1	6.5
SW	4.0	4.0	.3									8.3	4.1
WSW	.8											.8	3.0
W	.5	.3										.8	3.3
WNW	.3											.3	3.0
NW	1.1	1.3	.5									3.0	4.6
NNW	.3	1.3	.8									2.4	5.4
VARBL													
CALM												41.7	
	19.3	28.8	12.1	2.2								100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 372

2

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4521 (STATION) | CAPE RACE AAF (CORRECTED) (STATION NAME) | 51-54 (YEARS) | (MONTH)

ALL WEATHER (CLASS)

0000-0700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.6	5.4	.2									10.1	4.1
NNE	.5	1.1	.3									1.9	4.7
NE	1.9	1.1	1.6									4.6	5.3
ENE		.3										.3	6.0
E		.3										.3	6.0
ESE	.3											.3	3.0
SE	1.3	1.6	1.3									4.2	5.5
SSE	.3	.5										.8	4.3
S	2.7	2.4	1.1	.3								6.5	4.8
SSW		.2	.3									.8	5.7
SW	.5	2.4	.5	.8								4.2	6.3
WSW	.5	.5										1.1	4.0
W													
WNW													
NW	1.9	2.2										4.0	3.9
NNW	1.6	3.5	.3									5.4	4.4
VARBL													
CALM												54.8	
	10.1	21.8	6.2	1.1								100.0	2.1

TOTAL NUMBER OF OBSERVATIONS 372

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	51-54,61,63-67,70	6
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0300-0500
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.1	4.0	.2									6.2	4.1
NNE	1.3	1.1										2.4	3.7
NE	1.4	1.9	.6									4.0	4.6
ENE			.2									.2	8.0
E			.2									.2	7.0
ESE	.2											.2	3.0
SE	1.3	1.6										2.9	4.1
SSE	.6	.3	.3	.2								1.4	5.4
S	.8	.8	.6	.6								2.9	6.9
SSW	.3	.3		.2								.8	5.2
SW	.3	.6	.2	.2								1.3	6.0
WSW	.3	.2		.3								.8	7.8
W	.2	.2										.3	3.5
WNW													
NW	1.3	.3										1.6	3.6
NNW	.5	1.1										1.6	4.2
VARBL	.8											.8	2.2
CALM												72.5	
	11.3	12.5	2.2	1.4								100.0	1.3

TOTAL NUMBER OF OBSERVATIONS 626

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,56,61-71	AUG
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.6	3.6	.7	.1								8.0	4.7
NNE	3.1	3.0	.4	.1	.1							7.7	4.3
NE	2.8	2.5	.4	.2								5.9	4.2
ENE	.2	.5	.1									.9	4.5
E	.1	.1										.2	3.7
ESE	.1	.2										.4	3.8
SE	.5	.4	.2									1.1	4.2
SSE	.3	.9	.6	.1								1.5	5.9
S	.9	2.6	1.1	.1								4.8	5.5
SSW	.5	.7	.8	.1	.1							2.1	6.3
SW	.2	.6	.6	.2								1.6	7.4
WSW		.1	.1	.1								.4	7.4
W	.1	.2	.1									.4	4.6
WNW	.1	.1										.1	3.5
NW	.6	.5										1.1	3.8
NNW	.2	.4	.1	.1								.7	5.7
VARBL	1.0	.2										1.2	2.9
CALM												62.9	
	14.3	16.9	5.2	.9	.1							100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 1400

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,56,61-71	APR
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0900-1100
HOURS (L S T)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.8	5.2	1.3	.1								9.4	4.8
NNE	1.8	2.8	.9	.1	.1							5.7	5.0
NE	1.3	1.7	1.4	.4								4.9	5.9
ENE	.1	.5	.3	.1								1.0	6.1
E	.4		.1	.1								.6	5.4
ESE		.1										.1	4.0
SE	.4	.4	.1	.1								1.0	5.0
SSE	.8	1.1	.4	.1								2.4	5.3
S	1.2	3.1	3.1	.1								7.4	6.3
SSW	1.1	1.9	.9	.1								4.0	5.3
SW	.0	2.1	1.2	.4								4.4	6.6
WSW	.5	.7	.7									1.8	5.5
W	.3	1.0	.2									1.5	4.9
WNW	.3	.1	.1									.6	4.4
NW	1.2	1.2	.1	.1								2.5	4.1
NNW	.7	2.4	.6	.1								3.8	5.0
VARBL	2.0	.6										2.5	3.0
CALM												46.3	
	12.4	24.8	11.6	1.8	.1							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 1376

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	51-54,56,61-71	JUNE
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	2.2	1.8	.2								6.6	5.4
NNE	.5	2.1	1.8	.4								4.8	6.8
NE	.6	1.4	2.2	.9								5.1	7.6
ENE	.1	.4	.7	.3								1.4	8.3
E	.4	.3	.3	.2								1.2	6.6
ESE		.3										.3	5.0
SE	.7	.2	.2									1.1	4.4
SSE	.2	1.2	.4	.1								2.0	5.9
S	1.3	4.4	3.2	.9								9.7	6.5
SSW	1.6	3.0	2.7	.4	.1							7.7	6.0
SW	1.4	5.2	4.3	1.2								12.2	6.6
WSW	1.0	2.2	1.4									4.6	5.6
W	1.3	2.2	.7	.2								4.7	5.1
WNW	.6	.7	.4									1.6	4.8
NW	1.0	1.8	.4	.1								3.3	4.6
NNW	1.0	1.0	.6									2.6	4.8
VARBL	1.9	.7										2.6	3.0
CALM												28.0	
	16.9	29.0	21.0	4.9	.1							100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 1357

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

432/1	CAMP PAGE AAF KOREA/CHUCHON	51-54,56,61-71	AUG
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1500-1700
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	2.5	1.7	.4								5.7	6.0
NNE	.5	1.4	1.9	.3								4.2	6.8
NE	.4	2.0	3.7	.2								6.4	7.3
ENE	.1	.4	1.1	.2								1.8	8.4
E		.8	.6	.1								1.5	6.6
ESE	.1	.2	.1									.4	5.0
SE	.3	.9	.1									1.3	4.6
SSE	.1	.6	.3									1.0	5.9
S	1.1	4.0	2.8	.5								8.4	6.3
SSW	.8	4.9	4.4	.5								10.6	6.6
SW	2.2	6.1	5.6	1.0	.1							15.0	6.7
WSW	1.4	3.6	3.1	.3								8.5	6.3
W	1.2	3.1	1.0	.2								5.5	5.5
WNW	.4	.5	.1									1.0	4.6
NW	1.2	.7	.3	.1								2.3	4.6
NNW	.1	.8	.1	.1								1.1	5.1
VARBL	1.1	.4										1.6	3.0
CALM												23.5	
	12.1	33.1	27.2	4.0	.1							100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 1336

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	51-54,56,61-62,64-67	AUG
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1800-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	4.0	.8									5.5	4.9
NNE	.2	1.3	1.3									2.8	6.3
NE	.3	4.1	4.1	.8	.2							9.6	7.3
ENE		.7	.7	.2								1.5	7.4
E	.3	.7	.3									1.3	5.1
ESE			.2									.2	8.0
SE	.7	2.0	.5									3.1	4.9
SSE	.5	.5										1.0	3.8
S	2.5	5.5	1.5	.3								9.8	5.2
SSW	2.3	1.8	2.0									6.1	5.0
SW	5.0	8.3	4.3	.3	.2							18.0	5.2
WSW	1.0	2.0	1.2			.2						4.3	6.0
W	1.2	1.5	.2	.2								3.0	4.4
WNW	.5		.2	.2								.8	6.0
NW	.8	2.3	.2									3.3	4.6
NNW	.7	1.0	.2									1.8	4.7
VARBL													
CALM												27.8	
	10.6	35.6	17.5	2.0	.3	.2						100.0	4.0

TOTAL NUMBER OF OBSERVATIONS 604

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-54,66 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS)

2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.7	7.2	1.3									12.3	4.5
NNE	1.6	2.7	1.1									5.3	5.2
NE	1.1	3.5	2.7	.5								7.7	6.6
ENE		.3	.5									.8	7.0
E	.3											.3	3.0
ESE		.3										.3	4.0
SE	2.1	2.4										4.5	3.6
SSE	.3	1.1	.8									2.1	5.6
S	2.1	4.0	1.3									7.5	4.8
SSW	.3											.3	3.0
SW	1.1	1.9	1.3	.5								4.8	6.4
WSW	.5	.8										1.3	4.0
W	.3											.3	3.0
WNW	.5	.3										.8	3.3
NW	2.1	1.3										3.5	3.5
NNW	.5	2.1	.3									2.9	5.0
VARBL													
CALM												45.3	
	16.5	27.7	9.3	1.1								100.0	2.7

TOTAL NUMBER OF OBSERVATIONS 375

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	51-54	SEP
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0000-0200
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.3	4.7	.6	.3								8.7	4.7
NNE	2.2	2.2										4.4	4.0
NE	1.1	1.1										2.2	3.6
ENE		.3										.3	4.0
E	.6	.3										.8	2.7
ESE													
SE	.6	1.7	.3									2.5	4.4
SSE	1.7	.3										1.9	3.1
S	1.9	1.1	.3	.3								3.6	4.8
SSW	.8	.6		.3								1.9	4.9
SW	.8	.6										1.4	3.6
WSW	.3											.3	3.0
W	.8	.3										1.1	3.0
WNW													
NW	1.9	.6	.6									3.3	4.1
NNW	1.4	1.4	.3	.6	.3							3.9	6.5
VARBL													
CALM												63.1	
	17.5	12.0	2.2	1.4	.3							100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 360

ATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND
DIRECTION AND SPEED
(FROM HOURLY OBSERVATIONS)

63271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,61,63-66,70	SEP
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0300-0500
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	3.5	1.0	.2								7.1	4.8
NNE	1.8	1.5	.7									4.0	4.5
NE	2.2	.7	.2									3.0	3.5
ENE	.2											.2	3.0
E	.3		.2									.5	4.3
ESE		.3										.3	5.0
SE	1.2	.2										1.3	3.4
SSE	.8	.5										1.3	3.6
S	1.3	.8	.5	.2								2.9	5.2
SSW	.2		.2									.3	5.0
SW	.7	1.2										1.3	4.1
WSW													
W	.3											.3	3.0
WNW													
NW	1.0	.5	.3	.2								2.0	4.9
NNW	1.2	.5	.3	.3								2.4	5.7
VARBL													
CALM												72.4	
	13.0	9.7	3.6	.8								100.0	1.2

TOTAL NUMBER OF OBSERVATIONS 595

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] PROCESSING BRANCH
ETAC/USAF
[illegible] WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271 — STATION
CAMP PAGE AAF KUNSAN/CHUNCHON — STATION NAME
51-54,56,61-71 — YEARS
SEP — MONTH

ALL WEATHER — CLASS
0800-0900 — HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.7	4.3	1.0	.1								[illegible].7	4.5
NNE	4.4	5.1	.7									10.7	4.0
NE	2.8	2.6	.2									5.7	3.6
ENE	.8	.9	.1									1.8	4.0
E	.6											.6	2.9
ESE	.2	.1										.4	3.2
SE	.9	.7										1.9	3.4
SSE	.2	.1										.4	3.8
S	1.1	1.0	.4	.1								2.6	4.9
SSW	.2	.1	.1									.5	5.1
SW	.4	.4	.2	.1								1.2	5.6
WSW	.1	.1	.1									.3	5.0
W	.2		.1									.3	3.8
WNW	.1											.1	2.0
NW	.4	.6	.1	.1								1.1	4.9
NNW	.7	.4	.2	.1								1.4	4.8
VARBL	1.2	.1										1.4	2.5
CALM												62.5	
	17.2	16.5	3.4	.4								100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 1361

DATA PR[illegible] BASED
ETAC/US-
AIR [illegible] SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

(47271) STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-54,56,61-71 YEARS | SEP MONTH

ALL WEATHER CLASS

0500-1100 HOURS (L S T)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.7	6.0	1.4	.1								11.2	4.7
NNE	2.4	4.8	2.0	.1								9.7	5.1
NE	2.1	1.9	1.5	.2								5.1	5.3
ENE	.5	.2	.2									1.0	4.1
E	.6	.4	.3									1.3	4.4
ESE	.1	.4										.9	4.1
SE	.9	.4										1.3	3.4
SSE	.7	.4	.1									1.1	3.8
S	.7	1.4	.7	.3								3.2	6.0
SSW	.3	.6	.7	.2								1.8	6.8
SW	.5	.5	.7	.1								1.8	6.2
WSW	.1	.1	.2	.1								.9	6.9
W	.8	.1	.4									1.3	5.1
WNW	.1	.2	.1									.7	4.4
NW	1.1	1.3	.2									2.6	4.3
NNW	1.5	1.3	.2	.2								3.2	4.4
VARBL	2.9	.6										3.5	2.9
CALM												51.1	
	19.1	19.7	8.8	1.3								100.0	2.4

TOTAL NUMBER OF OBSERVATIONS 1358

[illegible] PROCESSING BRANCH
USTAC/USAF
[illegible] AIR BASE SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF (KOREA/CHUNCHON)	51-54,56,61-71	JAN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1200-1400
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.2	3.9	1.7	.2								7.9	5.7
NNE	1.0	2.0	2.8	.3								6.1	6.4
NE	.5	1.1	3.8	.8								6.2	8.2
ENE		.2	.7	.2								1.1	8.4
E	.4	.5	.3	.1								1.3	5.4
ESE		.2	.1									.2	6.3
SE	1.0	.4	.1									2.[illegible]	3.7
SSE	.8	.8	.5									2.[illegible]	4.8
S	1.4	1.9	1.3	.3								4.5	5.7
SSW	.6	2.1	1.9	.4								5.[illegible]	6.5
SW	1.3	3.2	2.6	1.4	.1							8.6	7.1
WSW	.2	.9	1.0	.4								2.5	7.5
W	2.1	2.2	1.1	.2								5.6	4.9
WNW	.2	1.4	.4	.1								3.[illegible]	4.7
NW	1.3	2.1	.4									4.[illegible]	4.4
NNW	1.7	1.8	.5	.2								4.2	4.9
VARBL	2.3	.5										2.8	2.3
CALM												32.7	
	18.0	26.4	16.9	4.4	.1							100.[illegible]	4.0

TOTAL NUMBER OF OBSERVATIONS 1331

NAT. PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

63271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,56,61-71	SEP
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1300-1700
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	3.2	1.8	.8								7.5	5.9
NNE	.7	1.2	2.6	.3								4.8	7.1
NE	.4	2.1	5.5	.4								8.3	7.6
ENE	.1	.5	1.2	.2								2.0	7.5
E	.2	.6	.2									1.1	4.9
ESE	.1	.1	.1									.2	5.7
SE	.6	1.3	.5									2.5	5.2
SSE	.2	.8	.2									1.2	5.0
S	1.8	3.1	2.1	.1								7.0	5.4
SSW	1.3	3.2	3.1	.7	.1							8.4	6.7
SW	1.0	4.1	5.8	.5	.2							12.2	6.8
WSW	.9	2.8	2.0	.5								6.1	6.3
W	1.4	3.2	1.6	.5								6.7	5.7
WNW	.8	1.5	.2	.1								2.7	4.8
NW	.8	1.0	.3	.1								2.4	4.8
NNW	.6	1.5	.2	.2								2.8	5.3
VARBL	1.5	.2										1.6	2.6
CALM												22.4	
	15.0	30.4	27.7	4.2	.2							100.0	4.8

TOTAL NUMBER OF OBSERVATIONS 1301

DATA PROCESSING BRANCH
TAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

94278	CAMP PAGE AAF KUNSA/CHUNCHON	51-54,56,61-62,64-66,69	SEP
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1800-2000
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	3.3	1.4									6.5	4.9
NNE	1.1	1.6	1.4									4.0	5.4
NE	.9	3.2	3.3	.2								7.5	6.6
ENE	.4	.2	.4									.9	4.8
E	.5	.2	.7	.2								1.6	6.3
ESE	.4	.2										.5	3.3
SE	1.6	.4										1.9	3.3
SSE	.7	.5										1.2	3.4
S	2.3	4.9	1.1	.2								8.4	4.8
SSW	2.1	2.1	1.9	.5								6.7	5.8
SW	2.8	5.0	2.5	.5								11.4	5.4
WSW	1.4	.7	.9	.2								3.2	5.7
W	3.0	1.8	.9									5.6	4.3
WNW	.2	.7										.9	4.0
NW	2.8	2.1										4.9	3.6
NNW	.7	1.2	.5	.4								2.8	5.8
VARBL													
CALM												32.0	
	22.4	28.9	14.9	2.1								100.0	3.5

TOTAL NUMBER OF OBSERVATIONS 571

DATA PROCESSING BRANCH
USAFETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	51-54	SEP
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

2100-2300
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	6.1	5.6	1.9									13.6	4.3
NNE	.6	1.9	.6	.3								3.2	5.5
NE	1.7	1.7	.8									4.2	5.0
ENE	.3											.3	2.0
E	.8	.6										1.4	3.2
ESE		.3										.3	4.0
SE	1.7	1.7	.6									3.9	4.6
SSE	.8	1.1	.3	.3								2.5	5.3
S	2.5	1.1	.6	.3								4.4	4.7
SSW		.3										.3	5.0
SW	1.9	.3	.6									2.8	3.9
WSW	.3	.3										.6	4.5
W		.3	.3	.3								.8	8.0
WNW													
NW	2.2	2.5	.6									5.3	4.0
NNW	2.2	3.1		.8								6.1	5.0
VARBL													
CALM												49.7	
	21.4	20.8	6.4	1.9								100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 360

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4327.1	CAMP PAGE AAF KOREA/CHUCHUN	51-54	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0000-0200
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.2	3.9	.3									8.4	3.9
NNE		.6		.9								1.5	8.8
NE													
ENE													
E	.6											.6	3.0
ESE	.3											.3	3.0
SE	2.1	.6										2.7	3.2
SSE	2.4	.3										2.7	3.2
S	2.7	1.8	.3		.3							5.1	4.6
SSW	.9											.9	3.0
SW	.9		.3	.3								1.5	5.8
WSW	.6			.6								1.2	8.0
W	.6			.3								.9	6.0
WNW	.6											.6	3.0
NW	2.4	.9		.3								3.3	4.2
NNW	1.2	.6	.3									2.1	3.9
VARBL													
CALM												68.2	
	19.2	8.9	1.2	2.4	.3							100.0	1.4

TOTAL NUMBER OF OBSERVATIONS 333

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUCHON	51-54,60-61,63-66,69-70	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0300-0500
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.9	.5									3.5	4.6
NNE		.3	.8	.2								1.3	7.9
NE	1.1	.5	.2									1.8	3.7
ENE	.3	.2	.2									.6	5.0
E	.2											.2	3.0
ESE	.3	.6										1.0	4.2
SE	1.5											1.5	2.9
SSE	.8	.6										1.5	3.9
S	1.9	.6	.2									2.8	3.6
SSW	.3	.3	.8									1.3	6.8
SW	.5	1.0	.2									1.6	4.8
WSW	.2											.2	3.0
W	.5		.2	.5								1.1	8.3
WNW													
NW	1.3	.6	.5									2.6	4.4
NNW	.5	.5										1.0	3.8
VARBL	1.0											1.0	2.2
CALM												77.0	
	11.7	7.3	3.4	.6								100.0	1.1

TOTAL NUMBER OF OBSERVATIONS 617

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

46271	CAPE PAUL AAF KOREA/C-[illegible]	51-54,56,60-71	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	1.3	.5	.1								2.9	4.9
NNE	1.3	1.4	.9	.1								3.8	5.0
NE	1.9	1.9	.1									3.9	3.6
ENE	1.2	.6	.1									1.9	3.3
E	.6	.1										.8	3.1
ESE	.3	.1										.4	3.2
SE	1.2	.3	.1									1.5	3.4
SSE	.8	.2										1.0	2.9
S	2.2	.6	.3									3.0	3.4
SSW	1.3	.3	.2									1.8	3.7
SW	.9	.3	.2									1.4	4.2
WSW	.5	.1	.3	.2								1.0	6.8
W	.2	.2	.5	.1								1.0	7.3
WNW	.1	.1										.3	4.0
NW	.9	.1	.1									1.1	3.8
NNW	.1	.1	.1									.4	5.3
VARBL	1.9	.1										2.0	2.4
CALM												71.8	
	19.3	7.8	3.3	.6								100.0	1.1

TOTAL NUMBER OF OBSERVATIONS 1435

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	51-54,56,60-71	OCT	0900-1100
STATION	STATION NAME	YEARS	MONTH	HOURS (L.S.T.)

CLASS: ALL WEATHER

CONDITION:

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.3	2.4	.7	.3								6.7	4.5
NNE	1.5	1.8	1.3	.2	.1							5.0	5.4
NE	1.0	1.1	.6	.1								2.8	4.9
ENE	.2	.4	.3									1.0	5.7
E	.3	.3		.1								.7	4.5
ESE	.1	.2										.3	4.2
SE	1.3	.3										1.5	3.0
SSE	.4	.6										1.0	3.9
S	1.7	1.0	.3									2.9	4.0
SSW	1.2	1.0	.5	.3								2.9	5.3
SW	1.0	.6	1.9	.1								3.5	6.3
WSW	.1	.2	.6	.1								1.1	7.6
W	.7	.3	.6	.3								1.9	6.4
WNW	.6	.2	.1	.1								.9	4.8
NW	1.3	.4	.2									1.9	3.8
NNW	1.0	.7	.3									2.0	4.1
VARBL	3.0	.1										3.1	2.5
CALM												60.7	
	18.7	11.6	7.4	1.5	.1							100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 1434

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KUREA/CHUNCHON	51-54,56,60-71	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.1	1.0	.6	.2								5.5	4.2
NNE	.9	1.4	1.7	.7	.1							4.9	7.5
NE	.6	1.2	1.9	.6								4.4	7.4
ENE		.3	.5	.1								.9	7.8
E	.8	.1	.3									1.1	4.4
ESE	.3	.4		.1								.7	4.2
SE	1.1	1.1										2.1	3.8
SSE	.4	.6	.2									1.2	4.5
S	1.4	1.4	.3	.1								3.1	4.5
SSW	.6	1.1	1.6	.4								3.8	7.1
SW	1.3	1.4	2.3	1.1								6.2	7.5
WSW	.5	1.2	1.3	.6								3.6	7.5
W	1.2	1.4	1.9	.6	.1							5.2	7.1
WNW	1.0	.5	.7	.2								2.4	5.8
NW	1.8	.9	.1	.1	.1							2.9	4.1
NNW	1.2	.9	.2	.1								2.5	4.3
VARBL	3.4	.4										3.8	2.7
CALM												45.6	
	19.0	15.9	13.7	4.9	.3							100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 1398

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) | CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) | 51-54,56,60-71 (YEARS) | CT (MONTH)

ALL WEATHER (CLASS)

1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	1.6	.5	.4								3.5	5.6
NNE	.3	1.0	1.4	.4								3.0	7.7
NE	.1	1.8	3.0	1.0								5.9	8.1
ENE	.3	.4	1.3	.1								2.2	6.9
E	.2	.7	.4	.1								1.4	5.9
ESE	.1	.1										.2	4.0
SE	.6	.7	.4									1.7	4.7
SSE	.7	.3	.1									1.4	3.9
S	1.9	3.3	1.2									6.3	4.8
SSW	1.1	3.0	2.1	.4								6.7	6.2
SW	1.2	5.3	5.0	1.2	.1							12.7	7.1
WSW	.9	1.9	2.4	.3	.1							5.6	6.8
W	1.8	2.4	2.7	1.0								7.9	6.6
WNW	1.0	.1	.5	.1	.1							1.8	5.5
NW	1.6	1.1	.4	.1								3.3	4.7
NNW	.3	.4	.4									1.1	5.5
VARBL	2.4	.7										3.1	3.0
CALM												32.1	
	15.0	25.1	22.0	5.0	.2							100.0	4.2

TOTAL NUMBER OF OBSERVATIONS 1350

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4327/1	CAMP PAGE AAF KOREA/CHUCHON	51-54,56,60-66	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1800-2000
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	3.0	.3									4.8	4.3
NNE	.3	1.0	1.0									2.3	6.1
NE	1.2	2.5	2.2	.3								6.1	6.2
ENE	.2	1.0	.7									1.9	6.3
E	.5	.7										1.2	4.0
ESE	.2	.2										.3	3.5
SE	1.3	.5										1.8	3.5
SSE	1.0	.5	.2									1.7	3.9
S	4.5	1.2	.3									6.0	3.5
SSW	1.5	1.0	.8		.2							4.3	5.3
SW	2.7	5.3	2.2									10.1	5.0
WSW	.7	1.5	.7									2.8	5.3
W	2.3	2.7	1.2	.2								6.3	5.1
WNW	.5	.5	.2									1.2	4.7
NW	3.5	1.2	.5									5.1	3.9
NNW	1.8	1.0										2.9	3.5
VARBL													
CALM												41.3	
	28.3	24.4	10.1	.5	.2							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 603

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	51-54	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

2100-2300
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.5	4.7	.3									9.5	4.0
NNE	.9	1.2		.3								2.4	4.9
NE	.3	1.5	.3									2.1	4.4
ENE													
E	.6											.6	2.5
ESE		.6										.6	5.5
SE	1.2	1.8										3.0	3.9
SSE	2.4	.3										2.7	3.1
S	3.9	2.1	.6									6.6	4.0
SSW	1.5											1.5	2.8
SW	.9		.9									1.8	6.0
WSW	.6											.6	3.0
W	.6	.3	.6									1.5	5.4
WNW	.3	.6										.9	4.3
NW	2.4	3.0										5.4	3.8
NNW	2.1	.9	.6									3.6	4.1
VARBL													
CALM												57.0	
	26.0	17.3	3.3	.3								100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 337

[illegible]
[illegible]
[illegible]

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43771	[illegible] AAF KOTZEBUE/CHUCHUK	51-54	[illegible]
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	1.7	1.1									4.4	5.5
NNE	.4	1.5	.4									2.2	4.5
NE	.7	.4										1.1	3.3
ENE													
E	.4											.4	3.0
ESE													
SE	3.0	2.0										5.0	3.7
SSE	.7	.4	.4									1.5	5.0
S	2.6	1.1	.4									4.1	3.8
SSW		.4										.4	4.0
SW	1.9	2.2	.7									4.8	4.5
WSW				.4								.4	11.0
W	1.1	.7	.4	.7	.7							3.7	8.7
WNW													
NW	.4	.4	.7									1.5	5.8
NNW		.7										.7	4.5
VARBL													
CALM												69.3	
	12.6	12.2	4.1	1.1	.7							100.0	1.5

TOTAL NUMBER OF OBSERVATIONS 270

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUCHON	51-54,60-61,63-66,67-70	
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0300-0500
HOURS (L S T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2	1.0	.5									1.7	5.6
NNE	1.0	.7										1.6	3.5
NE	1.0	.7	.5	.3								2.4	5.6
ENE	.2			.3								.5	10.0
E	.3											.3	3.0
ESE	.2		.3									.5	7.7
SE	1.0	.2	.2									1.3	3.8
SSE	.5	.3										.8	3.8
S	.7	2.3	.2									3.1	4.3
SSW	.2	.5	.2	.2								1.0	5.7
SW	.3	1.0	1.3	.3								3.8	7.0
WSW	.2	.2	.8	.2								1.3	7.3
W	1.1	.7	.2	.5	.2							2.8	6.4
WNW													
NW	.5	.5										1.0	3.5
NNW	.5											.5	3.0
VARBL	.2											.2	2.0
CALM												76.7	
	7.4	9.5	4.1	1.8	.2							100.0	1.3

TOTAL NUMBER OF OBSERVATIONS 610

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

3271	CALE PLOE AAF [illegible]	51-54,60-71	
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0000-0400
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	.9	.0									2.1	4.5
NNE	.6	1.2	.1									1.9	3.6
NE	1.1	1.0	.4	.4								2.9	5.2
ENE	.5		.1	.1								.7	4.4
E	.3											.3	2.8
ESE	.4	.1										.5	3.3
SE	.9	.2										1.1	3.0
SSE	.5	.1	.1									.7	3.9
S	1.7	1.3	.8									3.8	4.4
SSW	1.4	.8	.4	.1								2.5	4.6
SW	.4	.6	1.1	.2	.2							2.6	7.9
WSW	.5	.5	.9	.4								2.2	7.3
W	.3	.7	.7	.1								1.8	6.3
WNW	.2	.1		.2								.4	7.6
NW	.3	.4	.1									.8	3.8
NNW	.4	.1										.5	3.2
VARBL	1.3	.2										1.5	3.0
CALM												73.4	
	11.9	8.1	5.0	1.4	.2							100.0	1.3

TOTAL NUMBER OF OBSERVATIONS 1201

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 — STATION
CAMP PAGE AAF KOREA/CHUNCHON — STATION NAME
51-54,60-71 — YEARS
NOV — MONTH
ALL WEATHER — CLASS
0900-1100 — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.3	1.3	.5									4.2	4.1
NNE	2.4	1.7	.6									4.7	3.9
NE	1.2	.9	1.0	.4								3.4	6.1
ENE	.1	.3	.2									.6	5.4
E	.5	.1										.5	2.9
ESE	.2											.2	2.5
SE	.5	.5	.1									1.2	3.9
SSE	.4	.2	.2									.8	4.4
S	1.0	1.1	.4									2.5	4.6
SSW	1.7	1.1	1.2	.1								4.1	5.1
SW	.5	.9	1.5	.7		.1						3.6	8.3
WSW	.5	.4	1.2	.5								2.6	8.0
W	.5	.2	1.5	.2								2.4	7.7
WNW	.3		.1		.2							.6	8.3
NW	.4	.9										1.3	4.1
NNW	.3	.2										.5	3.5
VARBL	1.0	.4										1.4	3.1
CALM												65.4	
	12.7	10.2	8.5	2.0	.2	.1						100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 1282

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 51-54,60-71 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS)

1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2,7	2,2	1,0	,1								6,0	4,5
NNE	1,2	1,2	,5	,2								3,0	5,2
NE	1,0	1,0	2,1	,2								4,3	6,7
ENE	,4	,2	,2	,1								,9	5,5
E	,4	,3	,1									,8	4,0
ESE	,2	,4										,6	4,0
SE	,6	1,0	,4									2,1	4,8
SSE	,2	,4	,2									1,3	5,0
S	1,4	1,6	,4									3,4	4,5
SSW	,5	1,3	2,2	,6								4,5	7,5
SW	1,1	1,7	3,9	1,7	,1							8,5	8,1
WSW	,2	,9	1,0	,6								3,5	8,5
W	1,0	,6	1,8	1,4	,3							5,1	9,1
WNW	,3	,3	,6									1,2	5,9
NW	1,2	,3	,5									2,0	4,3
NNW	,6	,6	,2	,2								1,5	5,2
VARBL	2,0	,1										2,1	2,7
CALM												49,4	
	15,0	14,6	15,7	4,9	,4							100,0	3,2

TOTAL NUMBER OF OBSERVATIONS 1247

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,60-71	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1500-1700
HOURS (L S T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	1.2	.7	.2								3.4	5.1
NNE	.4	.6	.5	.6								2.1	5.2
NE	.6	1.2	2.0	.2								4.1	7.1
ENE		.5	.7									1.1	6.9
E	.4	.1	.3									.8	5.4
ESE	.1	.2										.3	4.0
SE	.5	.6	.1									1.1	4.3
SSE	.2	.7	.2									1.1	4.6
S	.5	2.6	1.9	.2								4.8	6.5
SSW	.8	2.3	3.2	.2	.1							6.6	6.9
SW	1.3	4.8	7.1	1.3	.1							14.7	7.4
WSW	.7	1.7	4.8	.7								7.9	7.8
W	1.0	1.6	3.4	1.3	.1							7.4	7.9
WNW	.0	.4	.7	.2	.2							2.7	6.7
NW	1.3	1.1	.5	.2								3.0	5.1
NNW	.5	.0	.3	.1								1.9	5.2
VARBL	1.4	.1										1.5	2.7
CALM												36.1	
	16.4	19.4	26.3	4.6	.4							100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 1221

1
2

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4327. (AFB PROF AAF KUNSAN/CH'GMJU) 51-54,60-66 JUL

STATION STATION NAME YEARS MONTH

ALL WEATHER 1300-2000

CLASS HOURS (L S T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.9										2.8	3.9
NNE	.7	.4	1.1									2.2	6.2
NE	.2	2.8	2.2	.2								5.4	6.3
ENE		.4	.4									.7	6.0
E	.2	.0										.7	4.0
ESE													
SE	.9	2.4	.2									3.5	4.3
SSE	.4	.7	.2									1.3	4.7
S	1.3	2.8	.6	.2								4.9	4.8
SSW	1.9	1.7	1.1									4.7	4.9
SW	2.8	7.5	3.9	.6								14.7	5.6
WSW	1.3	2.1	1.5									5.0	5.3
W	3.0	1.3	1.1									5.6	4.5
WNW	.4		.4									.7	6.0
NW	1.7	.7										2.4	3.4
NNW	.4	.2										.6	3.3
VARBL													
CALM												44.6	
	16.2	25.0	12.7	.9								100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 536

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAPE RACE AAF (CREA)/CHECK	51-54	NOV
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

2100-2300
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.7	2.2	.7									6.7	4.2
NNE	1.1	.7	1.1									3.0	5.0
NE	.4	1.9	.7									3.0	5.0
ENE													
E	.4											.4	3.0
ESE													
SE	.4	1.1	.7									2.2	5.2
SSE	1.1	.7	.4									2.2	4.0
S	3.3	2.2	.4									5.9	4.1
SSW	.7	.4										1.1	3.7
SW	1.9	3.3	1.1									6.3	5.3
WSW		.4	.7									1.1	7.0
W		1.9	1.1	.7								3.7	8.1
WNW			.4									.4	7.0
NW	.4	1.5	.4									2.2	5.0
NNW													
VARBL													
CALM												61.9	
	12.3	10.3	7.8	.7								100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 270

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHUN (STATION NAME) 51-53 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	3.3	1.7										5.0	3.5
NNE	.8	2.1										2.9	4.0
NE													
ENE	.4											.4	3.0
E	.4	.4										.8	4.0
ESE													
SE	1.7											1.7	3.0
SSE	.8	1.2										2.1	4.2
S	1.7	.4										2.1	3.2
SSW	.4			.4								.8	7.5
SW	.4	.4	.4	1.2								2.5	9.0
WSW		.8	.8									1.7	7.3
W	.8											.8	3.0
WNW													
NW	2.1											2.1	3.0
NNW		.4										.4	5.0
VARBL													
CALM												76.7	
	12.9	7.5	1.2	1.7								100.0	1.1

TOTAL NUMBER OF OBSERVATIONS 240

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271 (STATION) | CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) | 51-54,60-61,63-66,69-70 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS)

0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.8										1.7	3.8
NNE	.3	1.0										1.4	4.0
NE	.5	.5	.2									1.2	4.6
ENE		.2										.2	5.0
E	.3	.2										.5	3.3
ESE		.2										.2	4.0
SE	1.3	.2										1.5	3.1
SSE		.2										.2	5.0
S	.8	.8										1.7	3.7
SSW	.2	1.2	.3									1.7	5.7
SW	.2	1.7	2.0	.2								4.0	7.1
WSW	.2	.3	.6									1.3	6.6
W	.5	.7	.3	.5								2.0	6.9
WNW	.3	.2										.5	3.7
NW	1.3	.8										2.1	3.8
NNW	.3	.3										.7	3.5
VARBL	.2	.2										.3	3.5
CALM												79.2	
	7.3	9.3	3.6	.7								100.0	1.0

TOTAL NUMBER OF OBSERVATIONS 606

USAFETAC FORM JUL 64 0-8-5 (OL-1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43271	CAMP PAGE AAF KOREA/CHUNCHON	51-53,60-71	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

0600-0800
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	.9	.2									2.1	3.7
NNE	.8	.8	.1									1.6	3.5
NE	.4	.0	.1									1.1	4.4
ENE	.2											.2	3.0
E	.1	.1	.1									.2	4.7
ESE	.1	.1										.2	3.5
SE	.3	.2										.5	3.0
SSE	.3	.2	.1									.6	3.9
S	1.0	.9	.5									2.9	4.0
SSW	.6	1.1	.7	.1								2.5	5.4
SW	.7	1.0	2.3	.6	.1							5.3	7.5
WSW	.4	.7	1.2	.4	.1							2.7	7.8
W	.6	.9	.9	.2								2.2	7.0
WNW	.2	.1										.3	3.0
NW	.3	.2		.2								.6	5.4
NNW	.1	.2										.3	4.3
VARBL	.7											.7	2.6
CALM												75.9	
	8.0	8.9	6.1	1.4	.2							100.0	1.3

TOTAL NUMBER OF OBSERVATIONS 1282

DATA PROCESSING BRANCH
TAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	51-53,60-71	11
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0900-1100
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.4	1.6	.1									4.0	3.5
NNE	1.7	.7										2.4	3.0
NE	1.0	.4	.1	.2								1.7	4.2
ENE													
E		.1										.1	6.0
ESE	.2	.1										.2	3.3
SE	.2	.2										.4	3.8
SSE	.5	.5										.9	3.7
S	.9	.3	.2									1.3	3.8
SSW	1.3	1.6	1.5	.5								4.8	6.3
SW	1.5	1.6	3.5	1.1								7.9	7.2
WSW	.7	.9	2.1	.8								4.6	7.6
W	1.3	.5	1.3	.1								3.2	5.5
WNW	.2	.1	.1	.1								.4	6.6
NW	.7	.2										.9	3.1
NNW	.9	.5	.1									1.5	3.7
VARBL	.7											.7	2.3
CALM												64.9	
	14.0	9.0	8.8	2.7								100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 1267

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

48271	CAMP PAGE AAF KOREA/CHUCHON	51-53,60-71	EC
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

CONDITION

1200-1400
HOURS (L.S.T.)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.6	1.9	.1									4.6	3.6
NNE	1.4	1.2		.1								2.7	3.9
NE	.2	1.4	.1	.1								1.7	5.1
ENE	.2	.1	.1									.4	4.6
E	.2	.2										.4	3.6
ESE	.2	.2	.1									.5	4.8
SE	.5	.6										1.1	3.8
SSE	.8	1.1										1.9	3.9
S	.6	2.1	.4									3.2	4.7
SSW	1.2	1.2	1.6	.4								4.5	6.3
SW	.8	2.1	5.7	2.0	.2							10.8	8.4
WSW	.8	1.3	3.6	1.7								7.4	8.4
W	.6	1.2	3.2	.5								5.6	7.7
WNW	.3	.3	.5	.2								1.4	7.5
NW	.4	.4		.1								.9	4.9
NNW	.6	.7										1.4	3.6
VARBL	.8											.8	2.5
CALM												50.9	
	12.3	16.1	15.3	5.1	.2							100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 1233

2

DATA PROCESSING BRANCH
TAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

9327 (STATION) | CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) | 51-53,60-71 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS)

1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.0	.9	.4									3.4	3.9
NNE	.5	.4	.1									1.4	4.1
NE	.3	.2	.3									.7	5.6
ENE			.1									.1	8.0
E	.3	.2										.5	3.2
ESE	.1	.1										.2	3.0
SE	.3	.3	.1									.7	4.5
SSE	.2	.1	.3									.6	6.0
S	1.1	3.4	.6									5.1	4.9
SSW	.5	4.2	2.6	.2								7.5	6.3
SW	.7	3.4	9.4	1.9	.1							15.5	8.1
WSW	.8	2.1	7.9	2.3								13.0	8.5
W	.6	2.4	4.4	.6								8.0	7.6
WNW	.2	.2	.6									.9	6.9
NW	.8	.1	.3	.1								1.3	5.0
NNW	.3	.3	.1									.8	4.1
VARBL	.7											.7	2.8
CALM												39.9	
	9.4	18.6	26.9	5.1	.1							100.0	4.2

TOTAL NUMBER OF OBSERVATIONS 1184

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	51-54,60-65	DEC
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1700-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	.6	.2									1.9	4.0
NNE													
NE	.2	.2	.6	.4								1.3	7.7
ENE													
E													
ESE													
SE	.7	1.3										2.0	3.9
SSE	.7	.7										1.5	4.1
S	1.7	3.3	.7									5.7	4.6
SSW	.6	2.2	1.1									3.9	5.4
SW	2.2	6.3	4.4	.7								15.7	6.1
WSW	.6	3.1	3.3									7.0	6.4
W	.6	2.8	2.6	.4								6.3	6.2
WNW	.4	.2										.6	3.7
NW	.7	.4	.6									1.7	5.1
NNW	.2	.2	.2									.6	5.3
VARBL													
CALM												52.1	
	7.9	23.2	13.6	1.5								100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 543

DATA PROCESSING BRANCH
USAF/USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47271	CAMP PAGE AAF KOREA/CHUNCHON	51-57	OCT
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

2100-2300
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	4.2	2.9										7.1	3.7
NNE	.4											.4	3.0
NE	.4											.4	3.0
ENE	.4											.4	3.0
E													
ESE		.4										.4	4.0
SE	2.1											2.1	3.0
SSE	.8	.4										1.7	3.8
S	1.7	5.9	.8									8.4	4.9
SSW	1.7	.8										2.5	3.8
SW	.4	1.7	.8									2.9	6.9
WSW	.4	1.3	.8									2.5	6.2
W		1.3	.4									1.7	5.3
WNW													
NW	.4											.4	3.0
NNW		.4										.4	5.0
VARBL													
CALM												68.6	
	13.0	15.5	2.9									100.0	1.4

TOTAL NUMBER OF OBSERVATIONS 239

2

USAFETAC
USAF ETAC/USAF
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

4327.1	FT P PAGE AAF [illegible]	51-55,60-72	LL
STATION	STATION NAME	YEARS	MONTH

	LL
CLASS	HOURS (L.S.T.)

CIG 200 FT TO 1400 FT W/ VSBY 1/2 MI OR MORE,
CONDITION

AND/OR VSBY 1/2 TO 2-1/2 MI W/CIG 200 FT OR MORE

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	2.7	2.5	1.3	.1								6.5	4.7
NNE	1.7	1.5	.6	.1								4.0	4.5
NE	1.0	.7	.5	.2								2.4	5.3
ENE	.3	.2	.1									.7	4.5
E	.4	.2	.0									.8	3.8
ESE	.2	.2	.0									.4	3.8
SE	.5	.4	.2									1.1	4.6
SSE	.4	.3	.2	.0								.9	4.7
S	1.1	1.5	1.3	.1								3.6	5.3
SSW	.7	.8	.4	.1								1.9	5.0
SW	.7	.8	.6	.2	.0	.0						2.4	6.2
WSW	.3	.2	.2	.1		.0						.9	6.3
W	.2	.3	.1	.0		.0						.7	5.2
WNW	.3	.1	.1	.0								.5	4.2
NW	.4	.3	.2	.1		.0						1.0	4.6
NNW	.7	.6	.4	.1								1.8	5.2
VARBL	1.3	.2										1.4	2.6
CALM												67.7	
	14.1	11.2	5.9	1.1	.0	.1						100.0	1.

TOTAL NUMBER OF OBSERVATIONS 8375

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART D CEILING VERSUS VISIBILITY

This summary is a bivariate percentage frequency distribution by classes of ceiling from zero to equal to or greater than 20,000 feet and as a separate class "no ceiling", versus visibility in 16 classes from zero to equal to or greater than 10 miles. Data are derived from hourly observations, and three sets of tables are presented as follows:

1. Annual - all years and all hours combined
2. By month - all years and all hours combined
3. By month - by standard 3-hour groups

Due to the cumulative nature of this presentation, it is possible to determine the percentage frequency of occurrence for any given limit of ceiling or visibility separately, or in combination of ceiling and visibility. The totals progress to the right and downward. Ceiling may be determined independently by reference to the horizontal row of totals at the bottom of the page. The percentage frequency for which the station was meeting or exceeding any given set of minima may be determined from the figure at the intersection of the appropriate ceiling column and visibility row. Several examples in the use of these tables are shown on pages 2 and 3 below.

D

U. S. Weather Bureau and Navy stations did not report ceilings within the range 10,000 feet and higher prior to January 1949. Summaries prepared from data for these stations using the earlier period and data subsequent to January 1949 will be modified to limit ceilings to 10,000 feet. Short periods of record prior to 1949 for these stations will be eliminated from the summary. For Air Force stations, the "no ceiling" category includes clear and scattered conditions, and ceilings above 20,000 feet for period through June 1948. Beginning in July 1948 for Air Force stations and January 1949 for USWB and U. S. Navy stations the "no ceiling" category consists of observations with less than 6/10 total sky cover and those cases where total sky cover is 6/10 or more, but not more than 1/2 of the sky cover is opaque.

Beginning in January 1968, METAR stations report visibilities to 6 miles and then greater than 6 miles. Thus, for METAR stations, the category equal to or greater than 10 miles is not printed in the tables, unless the summary was for a period ending before January 1968.

Continued on Reverse Side

EXAMPLES FOR USE OF CEILING VERSUS VISIBILITY TABLES IN THIS TABULATION

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥ 10	≥ 6	≥ 5	≥ 4	≥ 3	≥ 2½	≥ 2	≥ 1½	≥ 1¼	≥ 1	≥ ¾	≥ ⅝	≥ ½	≥ 5/16	≥ ¼	≥ 0
NO CEILING																
≥ 1800 ≥ 1500					91.0											92.6
≥ 1200 ≥ 1000																
≥ 900 ≥ 800																
≥ 700 ≥ 600																
≥ 500 ≥ 400										97.4						98.1
≥ 300 ≥ 200																
≥ 100 ≥ 0					95.4		96.9			98.3						100.0

EXAMPLE # 1 Read ceiling values independently of visibility under column at right headed ≥ 0.
For instance, from the table: Ceiling ≥ 1500 feet = 92.6%.
Ceiling ≥ 500 feet = 98.1%.

EXAMPLE # 2 Read visibilities independently of ceilings on bottom line opposite ≥ 0. From the table:
Visibility ≥ 3 miles = 95.4%.
Visibility ≥ 2 miles = 96.9%.
Visibility ≥ 1 mile = 98.3%.

EXAMPLE # 3 To obtain combinations of ceiling with visibility, read figure at intersection of the two categories; i.e.: Ceiling ≥ 1500 feet with visibility ≥ 3 miles = 91.0%.

ADDITIONAL EXAMPLES

EXAMPLE # 4 Values below minimums stated in the table may be obtained by subtracting the value given in the table from 100%.
Thus, to obtain the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles, subtract the value read from the table at the intersection, which is 91.0, from 100.0. The answer 9.0 is the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles.

Likewise, the percentage of observations with ceiling < 500 feet and/or visibility < 1 mile is 2.6, obtained by subtracting 97.4 from 100.0.

EXAMPLE # 5 To find the percentage of observations falling within the two categories given in example above, subtract the value read from the table for the first set of limits from the value in the table for the second set of limits. The difference will be the percentage of observations meeting the lower set of limits, but not meeting the higher set of limits.

The value 91.0 read from the table at the intersection of $\geq$ 1500 feet with $\geq$ 3 miles, subtracted from 97.4 read from the table at the intersection of $\geq$ 500 feet with $\geq$ 1 mile is equal to 6.4%. Thus; 6.4 percent of the observations meet the criteria: "ceiling $\geq$ 500 feet with visibility $\geq$ 1 mile, but < 3 miles; or ceiling $\geq$ 500 feet, but < 1500 feet with visibility $\geq$ 1 mile."

Since these tabulations are prepared in several ways including by month, by 3-hour groups it is possible to determine diurnal variations of ceiling and visibility limits as well as probabilities of various ceiling-visibility combinations.

S74-29964

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KINGMAN)/CHUCKAWALLA [illegible] 01-55,00-72 ALL

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥	≥	≥	≥	≥5/8	≥	≥
NO CEILING		42.6	45.4	46.8	47.6	48.1	48.7	49.2	49.6	49.8	49.5	49.5	49.6	49.6	49.7	49.8
≥ 20000		49.2	52.3	54.0	55.2	55.6	56.3	56.5	56.5	57.0	57.2	57.2	57.3	57.3	57.4	57.5
≥ 18000		49.5	52.6	54.3	55.6	55.7	56.6	56.9	56.9	57.3	57.5	57.5	57.7	57.7	57.8	57.9
≥ 16000		49.8	52.9	54.6	55.9	56.2	56.9	57.2	57.2	57.6	57.9	57.9	58.0	58.0	58.1	58.2
≥ 14000		50.6	53.7	55.5	56.8	57.1	57.8	58.1	58.1	58.5	58.7	58.7	58.9	58.9	59.0	59.1
≥ 12000		51.9	55.1	56.9	58.3	58.6	59.4	59.7	59.7	60.1	60.3	60.3	60.5	60.5	60.6	60.7
≥ 10000		54.3	57.7	59.7	61.1	61.4	62.2	62.5	62.5	63.0	63.2	63.2	63.4	63.4	63.5	63.6
≥ 9000		55.1	58.5	60.5	61.9	62.3	63.1	63.4	63.4	63.9	64.1	64.1	64.3	64.3	64.4	64.5
≥ 8000		57.4	61.0	63.2	64.7	65.1	65.9	66.2	66.3	66.6	67.0	67.0	67.2	67.2	67.3	67.4
≥ 7000		58.7	62.5	64.7	66.3	66.7	67.6	67.9	67.9	68.4	68.7	68.7	68.9	68.9	69.0	69.1
≥ 6000		59.4	63.3	65.6	67.2	67.6	68.5	68.9	68.9	69.4	69.7	69.7	69.9	69.9	70.0	70.1
≥ 5000		60.7	64.7	67.0	68.6	69.2	70.1	70.5	70.5	71.0	71.3	71.3	71.5	71.5	71.6	71.7
≥ 4500		61.5	65.5	67.9	69.6	70.1	71.0	71.4	71.4	71.9	72.2	72.2	72.4	72.4	72.5	72.6
≥ 4000		64.0	68.3	70.6	72.7	73.1	74.1	74.5	74.6	75.1	75.4	75.4	75.6	75.6	75.7	75.8
≥ 3500		66.3	70.8	73.4	75.4	75.8	76.9	77.3	77.3	77.9	78.2	78.2	78.4	78.5	78.6	78.7
≥ 3000		70.0	74.9	77.9	80.1	80.6	81.8	82.3	82.3	83.0	83.3	83.4	83.6	83.6	83.8	83.8
≥ 2500		72.5	78.0	81.2	83.7	84.3	85.7	86.2	86.3	87.1	87.4	87.4	87.7	87.7	87.9	88.0
≥ 2000		74.1	80.0	83.6	86.4	87.1	88.6	89.2	89.3	90.2	90.6	90.6	91.0	91.0	91.1	91.2
≥ 1800		74.5	80.4	84.1	87.0	87.7	89.3	90.0	90.0	91.0	91.4	91.4	91.7	91.7	91.9	92.0
≥ 1500		75.1	81.3	85.2	88.4	89.1	90.9	91.6	91.7	92.7	93.2	93.2	93.5	93.6	93.7	93.9
≥ 1200		75.3	81.6	85.7	89.0	89.8	91.7	92.5	92.6	93.6	94.1	94.1	94.5	94.5	94.7	94.8
≥ 1000		75.3	81.7	85.9	89.4	90.3	92.3	93.1	93.2	94.3	94.9	94.9	95.3	95.3	95.5	95.6
≥ 900		75.4	81.8	86.0	89.5	90.4	92.4	93.3	93.4	94.6	95.1	95.1	95.5	95.6	95.7	95.8
≥ 800		75.4	81.8	86.0	89.6	90.5	92.7	93.5	93.6	94.9	95.4	95.5	95.9	95.9	96.1	96.2
≥ 700		75.4	81.8	86.1	89.7	90.7	92.9	93.8	94.0	95.3	95.9	95.9	96.4	96.4	96.6	96.7
≥ 600		75.4	81.9	86.2	89.8	90.8	93.1	94.1	94.2	95.6	96.2	96.3	96.8	96.8	97.0	97.1
≥ 500		75.4	81.9	86.2	89.9	90.9	93.3	94.3	94.5	96.0	96.7	96.7	97.4	97.4	97.7	97.8
≥ 400		75.4	81.9	86.2	90.0	91.0	93.4	94.5	94.6	96.2	97.0	97.1	97.8	97.8	98.1	98.3
≥ 300		75.4	81.9	86.2	90.0	91.0	93.4	94.5	94.7	96.3	97.2	97.3	98.1	98.1	98.5	98.7
≥ 200		75.4	81.9	86.2	90.0	91.0	93.4	94.5	94.7	96.4	97.3	97.4	98.3	98.4	98.8	99.1
≥ 100		75.4	81.9	86.2	90.0	91.0	93.4	94.5	94.7	96.4	97.4	97.4	98.4	98.5	99.0	99.4
≥ 0		75.5	81.9	86.2	90.0	91.0	93.4	94.6	94.7	96.4	97.4	97.5	98.4	98.5	99.0	100.0

TOTAL NUMBER OF OBSERVATIONS 84297

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54, 61-72 ALL

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥1	1	1	1	2	2	3	5	5	10
NO CEILING		46.3	52.3	56.1	59.1	59.9	61.1	61.3	61.8	62.9	63.6	63.8	64.0	64.1	64.3	64.6
≥ 20000		49.5	55.2	59.5	64.0	64.8	66.3	67.1	67.2	68.4	69.2	69.3	69.6	69.7	69.9	70.2
≥ 18000		49.6	56.0	60.6	64.2	65.0	66.5	67.3	67.4	68.6	69.4	69.4	69.6	69.9	70.1	70.5
≥ 16000		49.7	56.2	60.8	64.4	65.2	66.7	67.5	67.6	68.9	69.6	69.7	70.1	70.2	70.4	70.7
≥ 14000		50.1	56.6	61.3	64.9	65.7	67.2	68.0	68.1	69.4	70.2	70.3	70.7	70.8	71.1	71.3
≥ 12000		50.2	56.7	61.5	65.2	66.0	67.5	68.4	68.5	69.8	70.6	70.7	71.1	71.2	71.5	71.7
≥ 10000		51.0	57.7	62.6	66.3	67.1	68.8	69.7	69.8	71.1	71.9	72.0	72.4	72.5	72.8	73.1
≥ 9000		51.0	57.9	62.8	66.6	67.4	69.0	70.0	70.1	71.4	72.2	72.3	72.7	72.8	73.1	73.3
≥ 8000		52.2	59.4	64.4	68.5	69.3	71.0	72.0	72.1	73.4	74.3	74.4	74.8	74.9	75.2	75.4
≥ 7000		52.8	60.0	65.1	69.3	70.1	71.9	72.9	73.0	74.4	75.3	75.3	75.8	75.9	76.1	76.4
≥ 6000		53.3	60.6	65.7	70.1	71.0	72.9	73.9	74.0	75.4	76.3	76.3	76.8	76.9	77.1	77.4
≥ 5000		54.0	61.3	66.6	71.3	72.3	74.2	75.2	75.3	76.7	77.7	77.7	78.1	78.2	78.5	78.8
≥ 4500		54.7	62.2	67.5	72.3	73.2	75.2	76.3	76.4	77.8	78.8	78.8	79.3	79.4	79.6	79.9
≥ 4000		56.1	64.0	69.7	74.7	75.6	77.9	79.1	79.2	80.7	81.7	81.8	82.2	82.3	82.5	83.0
≥ 3500		57.4	65.8	71.7	76.8	77.8	80.1	81.3	81.4	83.0	84.0	84.2	84.5	84.6	84.9	85.2
≥ 3000		59.8	68.8	75.1	80.5	81.7	84.6	85.9	86.0	87.9	89.0	89.1	89.6	89.7	90.0	90.3
≥ 2500		61.1	70.5	76.9	82.6	83.9	86.9	88.4	88.5	90.6	91.8	91.9	92.5	92.5	92.9	93.2
≥ 2000		61.5	71.1	77.7	83.4	84.9	88.1	89.6	89.8	92.2	93.5	93.6	94.3	94.4	94.7	95.0
≥ 1800		61.7	71.2	77.9	83.6	85.1	88.3	89.9	90.1	92.5	93.8	93.9	94.6	94.7	95.0	95.3
≥ 1500		61.8	71.5	78.2	84.1	85.7	89.1	90.7	90.9	93.5	94.9	95.0	95.7	95.8	96.1	96.4
≥ 1200		61.9	71.5	78.2	84.2	85.8	89.2	91.0	91.2	93.8	95.3	95.4	96.1	96.2	96.5	96.9
≥ 1000		61.9	71.5	78.3	84.2	85.8	89.2	91.1	91.3	94.1	95.6	95.7	96.4	96.5	96.9	97.2
≥ 900		61.9	71.5	78.3	84.2	85.8	89.3	91.1	91.4	94.2	95.7	95.8	96.6	96.6	97.0	97.3
≥ 800		61.9	71.5	78.3	84.2	85.8	89.3	91.2	91.5	94.4	96.0	96.0	96.8	97.0	97.3	97.6
≥ 700		61.9	71.5	78.3	84.2	85.8	89.3	91.3	91.5	94.5	96.2	96.3	97.1	97.2	97.6	97.9
≥ 600		61.9	71.5	78.3	84.2	85.8	89.3	91.3	91.6	94.6	96.4	96.5	97.3	97.5	97.8	98.2
≥ 500		61.9	71.5	78.3	84.2	85.8	89.3	91.3	91.7	94.7	96.5	96.6	97.7	97.8	98.3	98.6
≥ 400		61.9	71.5	78.3	84.2	85.8	89.3	91.3	91.7	94.7	96.6	96.7	97.9	98.0	98.5	98.8
≥ 300		61.9	71.5	78.3	84.2	85.8	89.3	91.3	91.7	94.7	96.7	96.8	97.9	98.1	98.6	99.1
≥ 200		61.9	71.5	78.3	84.2	85.8	89.3	91.3	91.7	94.7	96.7	96.8	98.0	98.2	98.7	99.3
≥ 100		61.9	71.5	78.3	84.2	85.8	89.3	91.3	91.7	94.7	96.7	96.8	98.0	98.2	98.9	99.6
0		61.9	71.6	78.3	84.3	85.9	89.4	91.4	91.8	94.8	96.8	96.9	98.1	98.3	99.0	100.0

TOTAL NUMBER OF OBSERVATIONS 6506

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0
≥ 20000	51.1	54.7	57.2	59.0	59.7	60.5	61.2	61.3	62.0	62.3	62.3	62.4	62.4	62.5	62.6
≥ 15000	55.7	59.9	62.5	64.5	65.2	66.2	66.9	67.0	67.7	68.1	68.1	68.2	68.2	68.3	68.4
≥ 10000	55.9	60.1	62.7	64.8	65.5	66.4	67.2	67.2	68.0	68.3	68.3	68.4	68.5	68.6	68.7
≥ 9000	56.3	60.5	63.1	65.2	65.9	66.9	67.7	67.7	68.5	68.8	68.8	68.9	69.0	69.1	69.2
≥ 8000	56.7	60.9	63.6	65.8	66.5	67.4	68.2	68.3	69.0	69.4	69.4	69.5	69.5	69.6	69.7
≥ 7000	57.2	61.5	64.2	66.3	67.0	68.0	68.8	68.8	69.6	69.9	69.9	70.1	70.1	70.2	70.3
≥ 6000	58.3	62.6	65.6	67.8	68.5	69.6	70.4	70.4	71.2	71.6	71.6	71.7	71.7	71.8	71.9
≥ 5000	58.6	63.2	66.0	68.2	68.9	69.9	70.7	70.8	71.5	71.9	71.9	72.1	72.1	72.2	72.3
≥ 4500	59.7	64.3	67.3	69.6	70.3	71.4	72.2	72.3	73.1	73.4	73.4	73.6	73.6	73.7	73.8
≥ 4000	60.3	65.2	68.1	70.4	71.1	72.2	73.1	73.2	74.0	74.3	74.3	74.5	74.5	74.6	74.7
≥ 3500	61.5	66.3	69.3	71.6	72.5	73.6	74.5	74.7	75.5	75.9	75.9	76.0	76.0	76.1	76.2
≥ 3000	62.3	67.8	70.9	73.3	74.2	75.4	76.4	76.5	77.3	77.7	77.7	77.8	77.9	78.0	78.1
≥ 2500	63.6	68.6	71.7	74.1	75.1	76.2	77.3	77.3	78.2	78.6	78.6	78.7	78.8	78.9	79.0
≥ 2000	65.4	70.8	74.1	76.7	77.6	78.9	80.0	80.1	81.0	81.4	81.4	81.5	81.5	81.6	81.8
≥ 1800	67.1	72.9	76.5	79.1	80.1	81.4	82.5	82.6	83.5	84.1	84.1	84.2	84.2	84.4	84.5
≥ 1500	70.0	76.1	80.1	83.0	84.1	85.6	86.9	86.9	87.9	88.5	88.5	88.7	88.8	88.9	89.0
≥ 1200	71.7	78.3	82.5	85.7	87.1	88.8	90.1	90.2	91.3	92.1	92.1	92.3	92.3	92.5	92.6
≥ 1000	72.2	79.1	83.6	87.1	88.6	90.5	91.8	92.0	93.3	94.2	94.2	94.6	94.6	94.9	95.0
≥ 900	72.4	79.3	83.9	87.4	88.9	90.8	92.2	92.3	93.7	94.7	94.7	95.0	95.1	95.3	95.5
≥ 800	72.7	79.7	84.4	88.2	89.7	91.8	93.3	93.5	95.1	96.2	96.2	96.6	96.6	96.9	97.1
≥ 700	72.8	79.9	84.7	88.5	90.1	92.3	93.9	94.0	95.7	96.8	96.9	97.3	97.3	97.6	97.8
≥ 600	72.9	80.0	84.9	88.7	90.4	92.5	94.1	94.4	96.2	97.4	97.4	97.9	97.9	98.3	98.4
≥ 500	72.9	80.0	84.9	88.7	90.4	92.5	94.2	94.5	96.4	97.6	97.7	98.1	98.2	98.5	98.7
≥ 450	72.9	80.0	84.9	88.8	90.4	92.6	94.2	94.6	96.5	97.7	97.8	98.3	98.3	98.6	98.8
≥ 400	72.9	80.0	84.9	88.8	90.4	92.6	94.3	94.6	96.5	97.8	97.9	98.4	98.4	98.8	98.9
≥ 350	72.9	80.0	84.9	88.8	90.5	92.7	94.4	94.7	96.7	98.0	98.1	98.6	98.6	99.0	99.2
≥ 300	72.9	80.0	84.9	88.8	90.5	92.7	94.4	94.7	96.7	98.1	98.1	98.8	98.8	99.3	99.5
≥ 250	72.9	80.0	84.9	88.8	90.5	92.7	94.4	94.7	96.7	98.1	98.1	98.8	98.8	99.3	99.5
≥ 200	72.9	80.0	84.9	88.8	90.5	92.7	94.4	94.7	96.7	98.1	98.2	98.8	98.9	99.4	99.7
≥ 150	72.9	80.0	84.9	88.8	90.5	92.7	94.4	94.7	96.7	98.1	98.2	98.8	98.9	99.4	99.8
≥ 100	72.9	80.0	84.9	88.8	90.5	92.7	94.4	94.7	96.7	98.1	98.2	98.8	98.9	99.5	99.9
≥ 0	73.0	80.1	85.0	88.9	90.5	92.8	94.4	94.8	96.8	98.1	98.2	98.9	99.0	99.5	100.0

TOTAL NUMBER OF OBSERVATIONS 6024

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AFB KOREA/CHUNCHON 52-54,61-72

ALL

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY (NAUTICAL MILES) ≥ 26	25	24	23	22	21	20	19	18	17	16	15	14	13
UNLIM	57.2	55.4	56.5	57.3	57.6	58.0	58.2	58.2	58.3	58.3	58.3	58.4	58.4	58.4	58.4
≥ 20000	59.9	62.6	63.8	64.7	65.1	65.6	65.7	65.7	65.9	66.0	66.0	66.1	66.1	66.1	66.1
≥ 18000	59.1	62.8	64.0	64.9	65.3	65.8	65.9	65.9	66.1	66.2	66.2	66.3	66.3	66.3	66.3
≥ 16000	59.4	63.0	64.2	65.2	65.5	66.0	66.2	66.2	66.4	66.5	66.5	66.5	66.5	66.6	66.6
≥ 14000	59.7	63.4	64.7	65.6	66.0	66.5	66.7	66.7	66.8	66.9	66.9	67.0	67.0	67.0	67.0
≥ 12000	60.5	64.2	65.3	66.5	66.9	67.4	67.6	67.6	67.7	67.9	67.9	67.9	67.9	68.0	68.0
≥ 10000	62.9	66.8	68.2	69.3	69.7	70.2	70.4	70.4	70.6	70.7	70.7	70.7	70.7	70.8	70.8
≥ 9000	63.2	67.1	68.6	69.7	70.1	70.6	70.8	70.8	71.0	71.1	71.1	71.2	71.2	71.2	71.2
≥ 8000	64.3	68.0	70.1	71.3	71.7	72.2	72.4	72.4	72.6	72.7	72.7	72.7	72.7	72.8	72.8
≥ 7000	65.5	69.7	71.3	72.5	72.9	73.4	73.6	73.6	73.8	73.9	73.9	74.0	74.0	74.0	74.0
≥ 6000	66.4	70.7	72.3	73.5	74.0	74.5	74.7	74.7	74.9	75.0	75.0	75.1	75.1	75.1	75.1
≥ 5000	67.7	72.1	73.7	75.0	75.4	75.9	76.2	76.2	76.3	76.5	76.5	76.5	76.5	76.6	76.6
≥ 4500	68.6	73.1	74.7	76.0	76.4	77.0	77.2	77.2	77.4	77.5	77.5	77.5	77.5	77.6	77.6
≥ 4000	71.7	76.3	78.0	79.3	79.7	80.3	80.5	80.5	80.7	80.8	80.8	80.9	80.9	80.9	80.9
≥ 3500	73.7	78.3	80.1	81.4	81.8	82.5	82.7	82.7	82.9	83.0	83.0	83.1	83.1	83.1	83.1
≥ 3000	77.1	82.1	84.1	85.7	86.2	86.9	87.2	87.2	87.5	87.6	87.6	87.7	87.7	87.8	87.8
≥ 2500	79.9	85.4	87.5	89.3	89.8	90.7	91.0	91.0	91.3	91.5	91.5	91.6	91.6	91.7	91.7
≥ 2000	81.2	86.9	89.3	91.3	91.9	92.9	93.3	93.3	93.9	94.1	94.1	94.2	94.2	94.3	94.3
≥ 1800	81.6	87.4	89.8	91.8	92.4	93.5	93.9	94.0	94.5	94.8	94.8	94.9	94.9	95.0	95.0
≥ 1500	82.1	88.0	90.5	92.9	93.6	94.7	95.3	95.4	96.0	96.4	96.4	96.6	96.6	96.7	96.7
≥ 1200	82.2	88.3	90.9	93.4	94.2	95.5	96.1	96.2	97.0	97.4	97.4	97.6	97.6	97.8	97.8
≥ 1000	82.2	88.3	91.0	93.6	94.4	95.7	96.4	96.5	97.4	97.9	97.9	98.1	98.1	98.3	98.3
≥ 900	82.2	88.3	91.0	93.7	94.5	95.8	96.5	96.7	97.5	98.0	98.1	98.3	98.3	98.5	98.5
≥ 800	82.2	88.4	91.1	93.7	94.6	95.9	96.6	96.7	97.6	98.1	98.2	98.4	98.4	98.6	98.6
≥ 700	82.2	88.4	91.1	93.7	94.6	95.9	96.6	96.8	97.7	98.2	98.3	98.6	98.6	98.8	98.8
≥ 600	82.2	88.4	91.1	93.7	94.6	95.9	96.6	96.8	97.7	98.3	98.4	98.8	98.8	98.9	98.9
≥ 500	82.2	88.4	91.1	93.8	94.7	96.0	96.7	96.9	97.9	98.6	98.6	99.1	99.1	99.3	99.3
≥ 400	82.2	88.4	91.1	93.8	94.7	96.0	96.8	96.9	97.9	98.6	98.7	99.2	99.3	99.5	99.5
≥ 300	82.3	88.4	91.1	93.8	94.7	96.0	96.8	97.0	97.9	98.7	98.7	99.3	99.4	99.6	99.6
≥ 200	82.3	88.4	91.1	93.8	94.7	96.0	96.8	97.0	97.9	98.7	98.8	99.3	99.4	99.7	99.7
≥ 100	82.3	88.4	91.1	93.8	94.7	96.0	96.8	97.0	97.9	98.7	98.8	99.3	99.4	99.7	99.8
≥ 0	82.3	88.4	91.1	93.8	94.7	96.0	96.8	97.0	98.0	98.7	98.8	99.4	99.5	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 6697

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-56,01-72 (YEARS) APR (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥5/8	≥½	≥¼
NO CEILING		49,8	51,6	52,7	53,7	53,8	54,4	54,5	54,6	54,7	54,7	54,7	54,7	54,7	54,7
≥20000		58,6	60,9	62,2	63,3	63,4	64,1	64,2	64,3	64,4	64,4	64,4	64,5	64,5	64,5
≥18000		58,9	61,2	62,6	63,7	63,8	64,5	64,6	64,6	64,7	64,8	64,8	64,8	64,8	64,9
≥16000		59,2	61,5	62,9	64,0	64,1	64,8	64,9	65,0	65,1	65,1	65,1	65,2	65,2	65,2
≥14000		59,8	62,1	63,5	64,6	64,7	65,4	65,6	65,6	65,7	65,7	65,7	65,8	65,8	65,8
≥12000		61,0	63,5	64,9	66,0	66,1	66,8	67,0	67,0	67,1	67,2	67,2	67,2	67,2	67,2
≥10000		63,0	65,6	67,1	68,2	68,3	69,0	69,2	69,2	69,3	69,4	69,4	69,4	69,4	69,4
≥9000		64,0	66,6	68,1	69,2	69,4	70,1	70,3	70,3	70,4	70,4	70,4	70,5	70,5	70,5
≥8000		66,5	69,4	71,0	72,1	72,3	73,0	73,2	73,2	73,3	73,4	73,4	73,4	73,4	73,4
≥7000		68,2	71,1	72,9	74,0	74,2	74,9	75,1	75,1	75,3	75,3	75,3	75,4	75,4	75,4
≥6000		68,9	71,9	73,7	74,9	75,1	75,8	76,0	76,0	76,2	76,2	76,2	76,3	76,3	76,3
≥5000		70,3	73,3	75,2	76,4	76,6	77,4	77,5	77,6	77,7	77,7	77,7	77,8	77,8	77,8
≥4500		71,1	74,1	76,1	77,2	77,5	78,2	78,4	78,4	78,6	78,6	78,6	78,7	78,7	78,7
≥4000		73,3	76,4	78,5	79,7	79,9	80,7	80,9	80,9	81,1	81,1	81,1	81,2	81,2	81,2
≥3500		75,4	78,7	80,8	82,1	82,3	83,2	83,3	83,3	83,5	83,5	83,5	83,6	83,6	83,7
≥3000		79,3	82,6	84,4	85,8	86,1	87,1	87,3	87,3	87,5	87,5	87,5	87,6	87,6	87,6
≥2500		80,1	84,0	86,7	88,5	88,8	89,8	90,1	90,1	90,3	90,4	90,4	90,4	90,4	90,5
≥2000		81,5	85,8	88,7	90,8	91,2	92,4	92,7	92,8	93,1	93,2	93,2	93,4	93,4	93,4
≥1800		81,8	86,1	89,1	91,3	91,7	92,9	93,2	93,3	93,6	93,8	93,8	93,9	93,9	93,9
≥1600		82,3	86,9	90,1	92,6	93,2	94,6	94,9	94,9	95,3	95,5	95,5	95,7	95,7	95,7
≥1400		82,4	87,2	90,5	93,2	93,8	95,4	95,8	95,8	96,3	96,5	96,5	96,7	96,7	96,7
≥1200		82,5	87,3	90,8	93,6	94,3	95,9	96,4	96,5	97,0	97,3	97,3	97,5	97,5	97,6
≥1000		82,5	87,3	90,9	93,7	94,4	96,2	96,7	96,7	97,3	97,6	97,6	97,8	97,9	98,0
≥900		82,5	87,4	90,9	93,8	94,5	96,3	96,8	96,9	97,5	97,8	97,9	98,1	98,2	98,2
≥800		82,5	87,4	90,9	93,9	94,6	96,4	97,1	97,2	97,9	98,3	98,3	98,7	98,8	98,8
≥700		82,5	87,4	91,0	94,0	94,7	96,5	97,3	97,3	98,1	98,6	98,6	99,0	99,0	99,1
≥600		82,5	87,4	91,0	94,1	94,8	96,7	97,4	97,5	98,3	99,1	99,1	99,5	99,5	99,6
≥500		82,5	87,4	91,0	94,1	94,8	96,7	97,5	97,6	98,6	99,2	99,2	99,6	99,6	99,7
≥400		82,5	87,4	91,0	94,1	94,8	96,7	97,5	97,6	98,6	99,2	99,3	99,6	99,7	99,8
≥300		82,5	87,4	91,0	94,1	94,8	96,7	97,5	97,6	98,6	99,3	99,3	99,7	99,7	99,8
≥200		82,5	87,4	91,0	94,1	94,8	96,7	97,5	97,6	98,6	99,3	99,3	99,7	99,7	99,9
≥100		82,5	87,4	91,0	94,1	94,8	96,7	97,5	97,6	98,6	99,3	99,3	99,7	99,7	99,9
0		82,6	87,4	91,0	94,1	94,8	96,7	97,5	97,6	98,7	99,3	99,3	99,7	99,8	100,0

TOTAL NUMBER OF OBSERVATIONS 7201

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 52-56,61-72 (YEARS) AY (MONTH) LL (HOUR)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	26	25	24	23	22	21	2	21	2	2	2	2	25/16	2	0
NO CEILING		50.3	52.4	53.6	53.9	54.0	54.2	54.3	54.3	54.3	54.3	54.3	54.4	54.4	54.4	54.4
≥ 20000		59.7	62.2	64.2	64.8	65.0	65.2	65.3	65.3	65.4	65.4	65.4	65.5	65.5	65.5	65.5
≥ 18000		60.2	62.9	64.6	65.3	65.4	65.7	65.7	65.7	65.9	65.9	65.9	65.9	65.9	66.0	66.0
≥ 16000		60.5	63.2	65.0	65.7	65.8	66.1	66.1	66.1	66.2	66.2	66.3	66.3	66.3	66.3	66.3
≥ 14000		61.3	64.3	66.2	66.9	67.0	67.3	67.3	67.3	67.5	67.5	67.5	67.6	67.6	67.6	67.6
≥ 12000		63.4	66.4	68.5	69.3	69.4	69.7	69.7	69.7	69.9	69.9	69.9	70.0	70.0	70.0	70.0
≥ 10000		66.5	69.9	72.2	73.0	73.1	73.4	73.5	73.5	73.6	73.6	73.6	73.7	73.7	73.7	73.7
≥ 9000		67.9	71.4	73.7	74.5	74.7	75.0	75.0	75.0	75.2	75.2	75.2	75.3	75.3	75.3	75.3
≥ 8000		70.4	74.1	76.6	77.4	77.6	77.9	77.9	77.9	78.1	78.1	78.1	78.2	78.2	78.2	78.2
≥ 7000		71.8	75.6	78.1	79.0	79.2	79.6	79.7	79.7	79.8	79.8	79.8	79.9	79.9	79.9	79.9
≥ 6000		72.8	76.7	79.2	80.2	80.4	80.7	80.8	80.8	81.0	81.0	81.0	81.1	81.1	81.1	81.1
≥ 5000		74.1	78.1	80.7	81.6	81.8	82.2	82.3	82.3	82.4	82.4	82.4	82.5	82.5	82.5	82.5
≥ 4500		74.9	78.9	81.5	82.5	82.7	83.0	83.2	83.2	83.3	83.3	83.3	83.4	83.4	83.4	83.4
≥ 4000		77.0	81.0	83.8	84.8	85.0	85.4	85.5	85.5	85.6	85.6	85.6	85.7	85.7	85.7	85.7
≥ 3500		78.6	82.9	85.8	86.8	87.0	87.4	87.5	87.5	87.7	87.7	87.7	87.8	87.8	87.8	87.8
≥ 3000		81.2	85.7	88.7	89.9	90.1	90.5	90.6	90.6	90.8	90.8	90.8	90.9	90.9	90.9	90.9
≥ 2500		83.0	87.9	91.1	92.5	92.8	93.4	93.5	93.5	93.7	93.7	93.7	93.8	93.8	93.8	93.8
≥ 2000		83.8	89.0	92.4	94.0	94.4	95.2	95.4	95.4	95.5	95.5	95.5	95.6	95.6	95.6	95.6
≥ 1800		84.1	89.4	93.0	94.6	95.0	95.8	96.0	96.0	96.1	96.1	96.2	96.2	96.2	96.2	96.2
≥ 1500		84.6	90.0	93.7	95.4	95.8	96.8	96.9	96.9	97.1	97.1	97.1	97.2	97.2	97.2	97.2
≥ 1200		84.9	90.4	94.2	96.1	96.6	97.5	97.7	97.7	97.9	97.9	97.9	98.0	98.0	98.0	98.0
≥ 1000		84.9	90.4	94.3	96.3	96.8	97.8	98.0	98.0	98.3	98.3	98.3	98.4	98.4	98.4	98.4
≥ 900		85.0	90.5	94.4	96.3	96.9	97.9	98.1	98.1	98.4	98.4	98.4	98.5	98.5	98.5	98.5
≥ 800		85.0	90.5	94.5	96.4	96.9	98.0	98.2	98.2	98.5	98.5	98.5	98.6	98.6	98.6	98.6
≥ 700		85.0	90.5	94.5	96.6	97.2	98.2	98.5	98.5	98.8	98.9	98.9	99.0	99.0	99.0	99.0
≥ 600		85.0	90.5	94.5	96.6	97.2	98.4	98.7	98.7	99.1	99.2	99.2	99.2	99.2	99.3	99.3
≥ 500		85.0	90.6	94.5	96.7	97.3	98.5	98.9	98.9	99.2	99.4	99.4	99.5	99.5	99.5	99.5
≥ 400		85.0	90.6	94.5	96.7	97.3	98.5	98.9	98.9	99.3	99.5	99.5	99.6	99.6	99.6	99.6
≥ 300		85.0	90.6	94.5	96.7	97.3	98.5	98.9	98.9	99.3	99.6	99.6	99.7	99.7	99.8	99.8
≥ 200		85.0	90.6	94.5	96.7	97.3	98.5	98.9	98.9	99.3	99.6	99.6	99.8	99.8	99.8	99.9
≥ 100		85.0	90.6	94.5	96.7	97.3	98.5	98.9	98.9	99.3	99.6	99.6	99.8	99.8	99.9	99.9
≥ 0		85.0	90.6	94.5	96.7	97.3	98.5	98.9	98.9	99.3	99.6	99.6	99.8	99.8	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 7433

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (AREA/CHUCHON) 01-56,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL

CEILING (HUNDREDS OF FEET)	VISIBILITY STATUTE MILES														
	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12
22000	39.7	39.9	40.1	40.6	40.9	40.9	40.9	40.9	41.0	41.0	41.0	41.0	41.0	41.0	41.0
20000	49.6	51.1	51.5	52.1	52.3	52.5	52.5	52.5	52.6	52.6	52.6	52.6	52.6	52.6	52.6
18000	50.2	51.8	52.2	52.8	53.0	53.1	53.2	53.2	53.2	53.2	53.2	53.2	53.2	53.3	53.3
17000	50.7	52.2	52.6	53.2	53.5	53.6	53.6	53.6	53.7	53.7	53.7	53.7	53.7	53.7	53.7
16000	52.0	53.6	54.0	54.6	54.8	54.9	55.0	55.0	55.0	55.1	55.1	55.1	55.1	55.1	55.1
15000	54.0	55.6	56.0	56.6	56.8	57.0	57.0	57.0	57.1	57.1	57.1	57.1	57.1	57.1	57.1
14000	57.4	59.1	59.5	60.1	60.4	60.6	60.6	60.6	60.7	60.7	60.7	60.7	60.7	60.7	60.7
13000	58.3	60.1	60.6	61.2	61.5	61.7	61.7	61.7	61.8	61.8	61.8	61.8	61.8	61.8	61.8
12000	61.9	63.9	64.4	65.2	65.4	65.6	65.7	65.7	65.7	65.8	65.8	65.8	65.8	65.8	65.8
11000	63.7	65.8	66.4	67.2	67.4	67.6	67.7	67.7	67.7	67.8	67.8	67.8	67.8	67.8	67.8
10000	64.6	66.8	67.4	68.2	68.4	68.6	68.7	68.7	68.7	68.8	68.8	68.8	68.8	68.8	68.8
9000	66.2	68.4	69.1	69.9	70.2	70.4	70.4	70.4	70.5	70.5	70.5	70.5	70.5	70.6	70.6
8000	67.2	69.4	70.1	71.0	71.2	71.4	71.5	71.5	71.6	71.6	71.6	71.6	71.6	71.6	71.6
7000	70.6	72.9	73.6	74.6	74.8	75.1	75.1	75.1	75.2	75.3	75.3	75.3	75.3	75.3	75.3
6500	74.0	76.5	77.2	78.2	78.4	78.7	78.8	78.8	78.8	78.9	78.9	78.9	78.9	78.9	78.9
6000	78.7	81.5	82.4	83.5	83.8	84.1	84.2	84.2	84.3	84.4	84.4	84.4	84.4	84.4	84.4
5500	81.9	85.1	86.2	87.4	87.7	88.0	88.1	88.1	88.3	88.3	88.3	88.4	88.4	88.4	88.4
5000	84.0	87.8	89.3	90.6	91.0	91.4	91.5	91.6	91.7	91.8	91.8	91.8	91.8	91.9	91.9
4500	84.7	88.6	90.1	91.6	92.0	92.4	92.5	92.5	92.8	92.9	92.9	92.9	92.9	92.9	92.9
4000	85.7	89.9	91.6	93.3	93.8	94.2	94.4	94.4	94.7	94.8	94.8	94.8	94.8	94.8	94.8
3500	86.4	90.7	92.6	94.5	95.0	95.5	95.8	95.8	96.0	96.1	96.1	96.2	96.2	96.2	96.2
3000	86.7	91.1	93.1	95.1	95.7	96.4	96.7	96.7	97.0	97.1	97.1	97.1	97.1	97.1	97.1
2500	86.8	91.2	93.2	95.3	95.9	96.6	97.0	97.0	97.3	97.4	97.4	97.4	97.4	97.4	97.4
2000	86.9	91.3	93.4	95.6	96.2	97.1	97.5	97.6	98.0	98.1	98.1	98.1	98.1	98.1	98.1
1800	86.9	91.5	93.6	95.8	96.5	97.5	97.9	98.0	98.5	98.6	98.6	98.6	98.6	98.6	98.6
1600	87.0	91.5	93.7	96.0	96.7	97.7	98.2	98.3	98.8	99.0	99.0	99.0	99.0	99.0	99.0
1400	87.0	91.6	93.8	96.1	96.9	98.0	98.5	98.6	99.3	99.5	99.6	99.5	99.5	99.5	99.5
1200	87.0	91.6	93.9	96.2	97.0	98.1	98.7	98.8	99.5	99.7	99.7	99.8	99.8	99.8	99.8
1000	87.0	91.6	93.9	96.2	97.0	98.1	98.7	98.8	99.5	99.8	99.8	99.9	99.9	99.9	99.9
800	87.0	91.6	93.9	96.2	97.0	98.1	98.7	98.8	99.5	99.8	99.8	99.9	99.9	99.9	99.9
600	87.0	91.6	93.9	96.2	97.0	98.1	98.7	98.8	99.5	99.8	99.8	100.0	100.0	100.0	100.0
400	87.0	91.6	93.9	96.2	97.0	98.1	98.7	98.8	99.5	99.8	99.8	100.0	100.0	100.0	100.0
200															

TOTAL NUMBER OF OBSERVATIONS 7431

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KIREA/CHUNCHON (STATION NAME) 51-54, 58, 61-72

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		23.1	24.0	24.3	24.6	24.6	24.7	24.7	24.8	24.8	24.8	24.8	24.8	24.8	24.9	24.9
≥ 20000		30.2	31.5	32.0	32.5	32.6	32.7	32.7	32.7	32.8	32.8	32.8	32.8	32.8	32.8	32.9
≥ 18000		30.9	31.7	32.2	32.6	32.9	33.0	33.0	33.0	33.1	33.1	33.1	33.1	33.1	33.1	33.2
≥ 16000		30.7	31.7	32.4	33.1	33.1	33.2	33.2	33.2	33.3	33.3	33.3	33.3	33.3	33.3	33.3
≥ 14000		31.3	32.5	33.2	33.9	33.7	33.8	33.8	33.8	33.9	34.0	34.0	34.0	34.0	34.0	34.0
≥ 12000		33.0	34.3	34.9	35.5	35.6	35.7	35.8	35.8	35.9	35.9	35.9	35.9	35.9	36.0	36.0
≥ 10000		35.9	37.3	37.9	38.6	38.7	38.8	38.9	38.9	39.0	39.1	39.1	39.1	39.1	39.1	39.1
≥ 9000		37.0	38.4	39.0	39.7	39.7	39.9	40.0	40.0	40.1	40.1	40.1	40.2	40.2	40.2	40.2
≥ 8000		40.0	41.5	42.2	43.1	43.2	43.4	43.5	43.5	43.7	43.7	43.7	43.8	43.8	43.9	43.8
≥ 7000		41.5	43.1	44.0	44.9	45.1	45.3	45.4	45.4	45.6	45.6	45.6	45.6	45.6	45.7	45.7
≥ 6000		42.1	43.9	44.8	45.7	45.9	46.0	46.2	46.2	46.3	46.4	46.4	46.4	46.4	46.5	46.5
≥ 5000		43.6	45.6	46.5	47.5	47.7	47.9	48.1	48.1	48.2	48.3	48.3	48.3	48.3	48.3	48.4
≥ 4500		44.7	46.6	47.5	48.5	48.7	48.9	49.1	49.1	49.3	49.3	49.3	49.3	49.3	49.4	49.4
≥ 4000		48.7	50.8	51.7	53.1	53.2	53.3	53.5	53.6	53.8	53.9	53.9	53.9	53.9	54.0	54.0
≥ 3500		52.7	55.0	56.2	57.4	57.6	57.9	58.1	58.1	58.2	58.3	58.3	58.3	58.3	58.4	58.4
≥ 3000		60.0	63.1	64.7	66.2	66.5	67.0	67.2	67.2	67.4	67.5	67.5	67.5	67.5	67.5	67.6
≥ 2500		66.2	70.3	72.6	74.4	74.7	75.5	75.7	75.7	76.1	76.2	76.2	76.3	76.3	76.3	76.3
≥ 2000		71.1	76.4	79.4	81.9	82.5	83.9	84.2	84.2	84.9	84.9	85.0	85.1	85.2	85.2	85.2
≥ 1800		72.3	77.6	81.0	83.7	84.4	85.9	86.1	86.3	87.0	87.1	87.1	87.3	87.3	87.4	87.4
≥ 1500		74.1	80.7	84.6	88.1	88.9	91.0	91.4	91.4	92.3	92.4	92.4	92.6	92.7	92.7	92.7
≥ 1200		74.6	81.5	85.8	89.8	90.8	93.2	93.6	93.8	94.8	94.9	94.9	95.1	95.2	95.2	95.2
≥ 1000		74.8	81.9	86.5	90.8	91.9	94.5	95.2	95.3	96.4	96.6	96.6	96.8	96.8	96.9	96.9
≥ 900		74.9	82.0	86.7	90.9	92.1	94.8	95.6	95.6	96.8	96.9	96.9	97.2	97.2	97.3	97.3
≥ 800		74.9	82.1	86.8	91.2	92.4	95.2	96.1	96.1	97.4	97.6	97.6	98.0	98.0	98.1	98.1
≥ 700		75.0	82.2	86.9	91.4	92.6	95.6	96.5	96.6	97.9	98.1	98.2	98.5	98.5	98.7	98.7
≥ 600		75.0	82.2	87.0	91.5	92.7	95.8	96.7	96.8	98.2	98.5	98.5	98.9	98.9	99.0	99.1
≥ 500		75.0	82.2	87.0	91.6	92.8	96.1	97.0	97.0	98.5	98.8	98.8	99.3	99.4	99.5	99.6
≥ 400		75.0	82.2	87.0	91.6	92.8	96.1	97.1	97.2	98.7	99.0	99.0	99.5	99.5	99.7	99.8
≥ 300		75.0	82.2	87.0	91.6	92.8	96.1	97.2	97.2	98.7	99.0	99.1	99.7	99.7	99.8	99.9
≥ 200		75.0	82.2	87.0	91.6	92.8	96.1	97.2	97.2	98.7	99.0	99.1	99.7	99.7	99.9	99.9
≥ 100		75.0	82.2	87.0	91.6	92.8	96.1	97.2	97.2	98.7	99.0	99.1	99.7	99.7	99.9	100.0
≥ 0		75.0	82.2	87.0	91.6	92.9	96.2	97.4	97.2	98.7	99.1	99.1	99.7	99.8	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 7758

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KUNSAN/CHUNCHON 51-54,57,61-71 ALL

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	27	26	25	24	23	22	27	21	21	2	24	2	1	25/6	2	2
		29.3	30.4	30.9	31.4	31.5	31.8	31.8	31.9	31.9	32.0	32.0	32.0	32.0	32.0	32.0
		36.1	37.2	38.3	38.8	38.9	39.3	39.3	39.3	39.5	39.5	39.5	39.6	39.6	39.5	39.6
		36.7	38.1	38.9	39.4	39.5	39.9	39.9	40.0	40.1	40.2	40.2	40.2	40.2	40.2	40.2
		37.1	38.5	39.3	39.8	39.9	40.3	40.3	40.4	40.5	40.6	40.6	40.6	40.6	40.6	40.6
		38.1	39.5	40.3	40.8	41.0	41.3	41.4	41.4	41.6	41.6	41.6	41.7	41.7	41.7	41.7
		39.9	41.4	42.2	42.7	42.9	43.3	43.4	43.4	43.6	43.6	43.6	43.7	43.7	43.7	43.7
		43.5	45.3	46.2	46.8	47.0	47.5	47.5	47.5	47.7	47.8	47.8	47.8	47.9	47.9	47.9
		44.6	46.5	47.5	48.2	48.4	48.9	49.0	49.0	49.1	49.3	49.3	49.3	49.3	49.3	49.3
		48.7	50.7	51.9	52.7	53.0	53.5	53.6	53.6	53.7	53.9	53.9	53.9	53.9	53.9	53.9
		50.8	52.2	54.5	55.5	55.9	56.4	56.5	56.5	56.7	56.8	56.8	56.8	56.9	56.9	56.9
		51.5	54.0	55.5	56.5	56.7	57.3	57.4	57.5	57.7	57.8	57.8	57.8	57.9	57.9	57.9
		53.0	55.7	57.2	58.3	58.5	59.1	59.2	59.3	59.5	59.6	59.6	59.6	59.6	59.7	59.7
		53.7	56.4	58.0	59.1	59.3	60.0	60.1	60.1	60.3	60.4	60.4	60.5	60.5	60.5	60.5
		56.3	59.3	60.9	62.2	62.4	63.2	63.3	63.3	63.5	63.7	63.7	63.7	63.7	63.8	63.8
		59.1	62.2	64.0	65.4	65.6	66.4	66.5	66.5	66.7	66.9	66.9	66.9	67.0	67.0	67.0
		64.8	68.5	70.7	72.2	72.5	73.5	73.6	73.7	73.9	74.1	74.1	74.2	74.2	74.2	74.2
		69.3	73.9	76.6	78.5	78.9	79.9	80.1	80.1	80.5	80.7	80.7	80.8	80.8	80.8	80.8
		72.7	78.0	81.7	84.2	84.7	86.2	86.3	86.3	87.1	87.3	87.3	87.5	87.5	87.5	87.5
		73.5	79.0	82.9	85.5	86.1	87.6	87.9	87.9	88.6	88.7	88.8	88.9	89.0	89.0	89.0
		74.5	80.4	84.7	87.7	88.3	90.1	90.5	90.5	91.3	91.5	91.5	91.7	91.7	91.7	91.8
		74.8	80.8	85.5	88.7	89.4	91.3	91.8	91.8	92.6	92.8	92.8	93.0	93.0	93.1	93.1
		74.8	81.0	86.0	89.5	90.2	92.5	93.1	93.1	94.1	94.3	94.3	94.6	94.6	94.7	94.7
		74.8	81.1	86.0	89.6	90.4	92.8	93.4	93.4	94.4	94.7	94.7	95.0	95.1	95.1	95.1
		74.8	81.2	86.2	89.9	90.7	93.2	93.9	94.0	95.1	95.4	95.4	95.8	95.8	95.9	95.9
		74.9	81.2	86.2	90.0	90.9	93.6	94.4	94.5	95.8	96.1	96.1	96.5	96.6	96.6	96.7
		74.9	81.2	86.4	90.2	91.1	93.9	94.9	95.0	96.4	96.8	96.8	97.3	97.3	97.4	97.5
		74.9	81.3	86.4	90.2	91.2	94.1	95.2	95.3	96.9	97.4	97.5	98.2	98.3	98.3	98.5
		74.9	81.3	86.4	90.3	91.2	94.2	95.3	95.4	97.1	97.8	97.9	98.5	98.6	98.7	98.9
		74.9	81.3	86.4	90.3	91.3	94.3	95.4	95.6	97.3	98.1	98.1	98.9	99.0	99.1	99.3
		74.9	81.3	86.4	90.3	91.3	94.3	95.5	95.7	97.5	98.3	98.3	99.2	99.3	99.4	99.7
		74.9	81.3	86.4	90.3	91.3	94.3	95.5	95.7	97.5	98.3	98.4	99.3	99.4	99.6	99.8
		74.9	81.3	86.4	90.3	91.3	94.4	95.5	95.7	97.5	98.3	98.4	99.3	99.4	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 7439

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43274 CAPE PAGE AAF, NUNEZ/CHUCHES 21-54,59,61-71 SEP

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

ALL

	35.9	40.4	41.1	41.6	41.7	42.1	42.2	42.2	42.4	42.5	42.5	42.6	42.6	42.6	42.6	42.6
	45.4	47.4	48.5	49.1	49.2	49.9	49.5	49.6	50.0	50.1	50.1	50.2	50.2	50.2	50.2	50.2
	45.7	47.6	48.9	49.5	49.6	50.0	50.2	50.2	50.4	50.5	50.5	50.6	50.7	50.7	50.7	50.7
	45.2	48.2	48.3	50.0	50.1	50.5	50.7	50.7	50.9	51.0	51.0	51.1	51.2	51.2	51.2	51.2
	47.9	50.0	51.1	51.8	51.9	52.4	52.5	52.5	52.9	52.9	52.9	53.0	53.0	53.1	53.1	53.1
	49.5	52.1	53.4	54.1	54.3	54.7	54.9	54.9	55.1	55.3	55.4	55.4	55.4	55.4	55.4	55.4
	52.9	55.7	57.2	58.1	58.3	58.8	58.9	58.9	59.2	59.3	59.3	59.4	59.5	59.5	59.5	59.5
	54.0	56.8	58.4	59.3	59.4	60.0	60.1	60.1	60.4	60.5	60.5	60.7	60.7	60.7	60.7	60.7
	57.3	60.4	62.0	63.0	63.2	63.7	63.9	63.9	64.2	64.3	64.3	64.4	64.4	64.5	64.5	64.5
	59.2	62.4	64.1	65.1	65.3	65.8	66.0	66.0	66.3	66.4	66.4	66.5	66.5	66.6	66.6	66.6
	59.9	64.2	65.9	66.9	66.2	66.7	66.9	66.9	67.2	67.3	67.3	67.5	67.5	67.5	67.5	67.5
	60.8	64.2	66.0	67.2	67.3	67.9	68.1	68.1	68.4	68.5	68.5	68.7	68.7	68.7	68.7	68.7
	61.7	65.2	67.0	68.1	68.3	68.9	69.1	69.1	69.4	69.5	69.5	69.7	69.7	69.7	69.7	69.9
	64.5	68.1	69.9	71.2	71.3	71.9	72.2	72.2	72.5	72.6	72.6	72.8	72.8	72.8	72.8	72.8
	66.9	70.7	72.6	74.1	74.2	75.1	75.4	75.4	75.7	75.8	75.8	75.9	75.9	76.0	76.0	76.0
	70.0	74.4	76.7	78.4	78.7	79.7	80.0	80.0	80.3	80.5	80.5	80.7	80.7	80.7	80.7	80.8
	72.4	77.4	80.1	82.1	82.4	83.6	84.0	84.0	84.5	84.6	84.6	84.8	84.8	84.9	84.9	84.9
	73.7	79.0	82.0	84.4	84.7	86.0	86.5	86.5	87.0	87.1	87.1	87.3	87.3	87.4	87.4	87.4
	74.0	79.5	82.6	85.1	85.4	86.7	87.2	87.2	87.7	87.8	87.9	88.0	88.0	88.1	88.1	88.1
	74.4	80.0	83.5	86.4	86.9	88.4	88.8	88.8	89.4	89.6	89.6	89.8	89.8	89.9	90.0	90.0
	74.4	80.1	83.9	86.9	87.4	89.1	89.6	89.6	90.2	90.4	90.4	90.7	90.7	90.7	90.8	90.8
	74.5	80.2	84.1	87.7	88.2	90.1	90.6	90.6	91.3	91.5	91.5	91.8	91.8	91.9	92.0	92.0
	74.5	80.3	84.2	87.9	88.5	90.4	90.9	90.9	91.6	91.8	91.8	92.1	92.1	92.2	92.3	92.3
	74.5	80.3	84.3	88.1	88.8	90.8	91.4	91.4	92.2	92.4	92.4	92.7	92.7	92.8	92.9	92.9
	74.5	80.4	84.6	88.5	89.2	91.4	92.1	92.2	93.0	93.2	93.2	93.5	93.6	93.7	93.7	93.7
	74.5	80.4	84.7	88.8	89.6	96.0	92.8	92.9	93.9	94.1	94.1	94.5	94.5	94.6	94.7	94.7
	74.5	80.5	84.8	89.1	90.1	92.7	93.7	93.8	95.0	95.4	95.4	95.9	95.9	96.1	96.2	96.2
	74.5	80.5	84.9	89.3	90.3	93.2	94.3	94.4	95.9	96.4	96.5	97.1	97.1	97.3	97.5	97.5
	74.5	80.5	84.9	89.3	90.4	93.3	94.6	94.7	96.2	96.8	96.9	97.6	97.6	97.9	98.2	98.2
	74.5	80.5	84.9	89.4	90.4	93.4	94.7	94.8	96.4	97.2	97.3	98.1	98.1	98.6	98.8	98.8
	74.5	80.5	84.9	89.4	90.4	93.4	94.7	94.8	96.4	97.3	97.3	98.2	99.2	99.7	99.2	
	74.6	80.6	85.0	89.5	90.5	93.5	94.8	94.9	96.5	97.4	97.5	98.3	98.4	99.0	100.0	

TOTAL NUMBER OF OBSERVATIONS 7230

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PICK AAF, KNOXVILLE/CHARLOTTE 51-54,56,69-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

VISIBILITY STATUTE MILES

CEILING FEET	2	2½	3	4	5	6	7	8	9	10	11	12	13	14	15	16
100	46.8	49.7	51.6	52.6	52.9	54.1	54.4	54.4	55.1	55.3	55.3	55.6	55.6	55.8	55.8	56.1
150	52.0	55.9	57.1	59.3	59.8	61.0	61.4	61.4	62.1	62.5	62.5	62.6	62.8	63.2	63.2	63.2
200	52.2	56.1	58.3	59.6	60.0	61.3	61.7	61.7	62.4	62.8	62.8	63.1	63.1	63.5	63.5	63.5
250	52.5	56.4	58.7	59.9	60.4	61.6	62.0	62.0	62.7	63.1	63.1	63.4	63.4	63.8	63.8	63.8
300	53.0	56.9	59.2	60.6	61.0	62.3	62.6	62.7	63.3	63.7	63.7	64.1	64.1	64.5	64.5	64.5
400	54.3	58.3	60.7	62.2	62.6	64.0	64.4	64.4	65.2	65.5	65.5	65.9	65.9	66.1	66.3	66.3
500	57.1	61.4	63.8	65.4	65.8	67.2	67.7	67.7	68.4	68.8	68.8	69.2	69.2	69.4	69.6	69.6
600	57.6	61.9	64.4	66.0	66.5	67.9	68.4	68.4	69.1	69.5	69.5	69.8	69.8	70.1	70.2	70.2
700	59.8	64.5	67.1	68.8	69.3	70.8	71.2	71.3	72.1	72.5	72.5	72.8	72.8	73.1	73.2	73.2
800	60.7	65.5	68.2	69.9	70.4	71.9	72.4	72.4	73.2	73.6	73.6	74.0	74.0	74.2	74.4	74.4
900	61.1	66.1	68.7	70.4	71.0	72.5	73.0	73.0	73.9	74.2	74.2	74.6	74.6	74.8	75.0	75.0
1000	61.5	66.9	69.6	71.4	71.9	73.5	74.0	74.0	74.9	75.3	75.3	75.6	75.6	75.9	76.1	76.1
1200	62.4	67.5	70.2	72.0	72.5	74.1	74.5	74.6	75.5	75.8	75.9	76.2	76.2	76.4	76.6	76.6
1400	64.4	69.3	72.6	74.3	75.1	76.6	77.1	77.2	78.1	78.5	78.5	78.9	78.9	79.1	79.3	79.3
1600	66.3	71.6	74.5	76.4	77.2	78.6	79.2	79.2	80.1	80.5	80.6	80.9	80.9	81.2	81.4	81.4
1800	68.7	74.4	77.5	79.5	80.1	81.8	82.4	82.4	83.4	83.8	83.9	84.2	84.2	84.5	84.7	84.7
2000	69.8	75.9	79.0	81.2	81.8	83.6	84.2	84.3	85.3	85.7	85.9	86.1	86.2	86.4	86.6	86.6
2200	70.1	76.3	79.5	81.8	82.5	84.3	84.9	85.0	86.1	86.5	86.6	87.0	87.0	87.2	87.4	87.4
2400	70.2	76.4	79.6	81.9	82.6	84.5	85.1	85.1	86.3	86.7	86.7	87.1	87.1	87.3	87.5	87.5
2600	70.3	76.6	80.0	82.4	83.1	85.0	85.7	85.7	86.9	87.3	87.3	87.8	87.8	88.1	88.2	88.2
2800	70.4	76.7	80.1	82.7	83.3	85.3	86.0	86.0	87.2	87.6	87.6	88.1	88.1	88.3	88.5	88.5
3000	70.4	76.8	80.3	83.0	83.6	85.6	86.3	86.4	87.6	88.1	88.1	88.5	88.5	88.8	89.0	89.0
3500	70.4	76.8	80.3	83.0	83.7	85.8	86.5	86.5	87.8	88.3	88.3	88.8	88.8	89.0	89.2	89.2
4000	70.4	76.8	80.3	83.1	83.8	85.9	86.7	86.8	88.1	88.6	88.6	89.1	89.1	89.4	89.6	89.6
4500	70.4	76.8	80.4	83.3	84.1	86.3	87.2	87.3	88.7	89.3	89.3	89.9	89.9	90.1	90.3	90.3
5000	70.4	76.8	80.5	83.4	84.4	86.6	87.6	87.7	89.1	89.7	89.7	90.4	90.4	90.7	90.8	90.8
5500	70.4	76.8	80.5	83.6	84.6	87.0	88.1	88.2	89.8	90.6	90.6	91.5	91.5	91.9	92.1	92.1
6000	70.4	76.8	80.5	83.6	84.7	87.2	88.4	88.6	90.7	91.8	91.9	93.0	93.0	93.2	93.5	93.5
7000	70.4	76.8	80.5	83.7	84.8	87.3	88.5	88.8	91.0	92.4	92.5	94.1	94.1	95.0	95.4	95.4
8000	70.4	76.8	80.5	83.7	84.8	87.3	88.6	88.9	91.2	92.8	92.8	94.7	94.8	96.2	96.8	96.8
10000	70.4	76.8	80.5	83.7	84.8	87.4	88.7	88.9	91.3	92.8	92.9	95.1	95.3	97.0	98.1	98.1
12000	70.5	76.9	80.6	83.7	84.8	87.4	88.7	89.0	91.4	92.9	93.0	95.1	95.4	97.1	100.0	

TOTAL NUMBER OF OBSERVATIONS 7404

1
2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43276 CAMP PAGE, AAF KOREA/OKINAWA 51-54,60-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0		
NO CEILING		44.7	47.7	49.4	50.8	51.1	52.0	52.4	52.4	52.8	53.1	53.1	53.4	53.4	53.6	53.9
≥ 20000		48.1	51.6	54.0	55.7	56.1	57.1	57.5	57.5	57.9	58.2	58.2	58.5	58.5	58.8	59.1
≥ 18000		48.5	52.1	54.2	56.1	56.5	57.4	57.7	57.8	58.2	58.5	58.5	58.8	58.8	59.2	59.7
≥ 16000		48.5	52.2	54.4	56.1	56.4	57.6	57.9	58.0	58.4	58.7	59.0	59.2	59.4	59.4	59.9
≥ 14000		49.1	52.7	55.0	56.7	56.9	58.2	58.5	58.5	59.3	59.7	59.7	60.0	60.2	60.2	60.5
≥ 12000		50.6	54.4	56.7	58.4	58.7	60.0	60.3	60.4	61.2	61.2	61.5	61.9	61.9	62.2	62.4
≥ 10000		52.6	56.3	58.7	60.6	60.9	62.2	62.6	62.6	63.5	63.8	63.8	64.2	64.2	64.4	64.7
≥ 9000		53.2	57.1	59.5	61.4	61.7	63.0	63.4	63.4	64.3	64.7	64.7	65.0	65.0	65.2	65.5
≥ 8000		55.0	59.0	61.3	63.3	63.7	65.2	65.6	65.6	66.6	67.1	67.1	67.5	67.5	67.7	68.1
≥ 7000		56.2	60.4	62.9	64.9	65.2	66.7	67.1	67.1	68.1	68.6	68.6	69.0	69.0	69.2	69.6
≥ 6000		57.1	61.4	64.0	66.2	66.5	68.0	68.5	68.5	69.6	70.1	70.1	70.6	70.6	70.8	71.1
≥ 5000		58.8	63.2	66.0	68.2	68.4	70.1	70.5	70.5	71.8	72.3	72.3	72.8	72.8	73.0	73.4
≥ 4500		59.9	64.9	68.3	69.0	69.3	70.9	71.4	71.4	72.7	73.2	73.2	73.7	73.7	74.1	74.5
≥ 4000		61.8	66.6	69.6	72.1	72.4	74.2	74.7	74.7	76.0	76.6	76.6	77.2	77.2	77.4	77.8
≥ 3500		63.3	68.4	71.6	74.1	74.5	76.3	76.8	76.9	78.2	78.7	78.7	79.4	79.4	79.6	80.0
≥ 3000		66.5	71.9	75.3	78.2	78.6	80.6	81.2	81.3	82.6	83.4	83.4	84.2	84.3	84.5	84.9
≥ 2500		68.6	74.3	78.1	81.3	81.8	83.8	84.4	84.5	86.0	86.7	86.7	87.5	87.6	87.8	88.2
≥ 2000		69.2	75.1	79.2	82.8	83.2	85.4	86.1	86.2	87.8	88.5	88.5	89.5	89.5	89.7	90.1
≥ 1800		69.4	75.4	79.5	83.0	83.6	85.8	86.4	86.6	88.2	88.9	88.9	89.8	89.9	90.1	90.5
≥ 1500		69.4	75.6	79.8	83.3	84.0	86.3	87.1	87.2	88.9	89.6	89.6	90.6	90.6	90.9	91.3
≥ 1200		69.6	75.8	80.1	83.7	84.4	86.8	87.6	87.8	89.4	90.1	90.1	91.1	91.2	91.4	91.8
≥ 1000		69.6	75.9	80.2	83.9	84.6	87.1	87.9	88.1	89.8	90.5	90.5	91.5	91.6	91.9	92.3
≥ 900		69.6	75.9	80.2	83.9	84.6	87.2	88.0	88.2	89.9	90.6	90.6	91.7	91.7	92.0	92.4
≥ 800		69.6	75.9	80.2	84.0	84.7	87.3	88.2	88.3	90.1	90.9	90.9	91.9	92.0	92.3	92.7
≥ 700		69.6	75.9	80.2	84.0	84.8	87.5	88.4	88.6	90.4	91.2	91.2	92.3	92.4	92.7	93.1
≥ 600		69.6	75.9	80.2	84.0	84.8	87.5	88.5	88.7	90.6	91.5	91.5	92.6	92.7	93.0	93.4
≥ 500		69.6	75.9	80.2	84.1	84.8	87.6	88.6	88.8	91.1	92.1	92.1	93.5	93.6	93.9	94.4
≥ 400		69.6	75.9	80.2	84.1	84.8	87.6	88.7	88.9	91.3	92.5	92.5	94.1	94.2	94.6	95.1
≥ 300		69.6	75.9	80.2	84.1	84.8	87.6	88.7	88.9	91.3	92.8	92.8	94.7	94.8	95.4	96.0
≥ 200		69.6	75.9	80.2	84.1	84.8	87.6	88.7	89.0	91.3	93.0	93.1	95.2	95.3	96.1	97.0
≥ 100		69.6	75.9	80.2	84.1	84.8	87.6	88.7	89.0	91.3	93.0	93.1	95.3	95.5	96.6	98.1
≥ 0		69.6	75.9	80.2	84.1	84.8	87.6	88.7	89.0	91.3	93.0	93.1	95.4	95.5	96.7	100.0

TOTAL NUMBER OF OBSERVATIONS 6582

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAPE PAGE AAF KOREA/CHUCHON 31-53,09-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	<¼	≥5/16	≥¼	≥0
NO CEILING		47.8	51.0	54.3	56.2	56.7	57.8	58.4	58.4	59.1	59.5	59.5	59.9	60.2	60.2
≥ 20000		57.1	59.3	57.4	59.5	60.2	61.3	61.9	61.9	62.9	63.3	63.3	63.6	63.9	64.1
≥ 18000		50.4	54.6	57.7	59.7	60.3	61.6	62.2	62.2	63.1	63.5	63.5	64.1	64.1	64.4
≥ 16000		50.5	54.7	57.8	59.8	60.4	61.7	62.3	62.3	63.2	63.7	63.7	64.2	64.3	64.5
≥ 14000		50.9	55.2	58.3	60.4	61.0	62.2	62.8	62.9	63.8	64.3	64.3	64.8	64.9	65.1
≥ 12000		51.6	55.9	59.1	61.3	61.9	63.2	63.8	63.8	64.8	65.3	65.3	65.8	65.9	66.1
≥ 10000		52.5	57.1	60.4	62.7	63.3	64.7	65.4	65.4	66.4	66.9	66.9	67.3	67.4	67.7
≥ 9000		52.8	57.3	60.7	63.0	63.6	65.0	65.6	65.7	66.7	67.1	67.1	67.6	67.7	67.9
≥ 8000		53.5	58.4	62.0	64.6	65.2	66.6	67.4	67.5	68.5	69.0	69.0	69.5	69.6	69.8
≥ 7000		54.3	59.4	63.2	65.9	66.6	68.0	68.9	68.9	70.0	70.5	70.5	71.0	71.1	71.3
≥ 6000		54.6	59.8	63.7	66.4	67.1	68.6	69.5	69.5	70.6	71.1	71.1	71.6	71.7	72.0
≥ 5000		55.6	61.0	65.0	67.8	68.5	70.2	71.0	71.1	72.2	72.7	72.7	73.3	73.3	73.6
≥ 4500		56.2	61.7	65.9	68.6	69.4	71.0	71.9	72.0	73.1	73.6	73.6	74.2	74.3	74.6
≥ 4000		58.8	64.8	69.1	72.2	73.0	74.7	75.6	75.7	76.9	77.5	77.5	78.2	78.3	78.6
≥ 3500		60.6	66.9	71.6	75.1	75.9	77.7	78.7	78.8	80.1	80.7	80.7	81.4	81.5	81.8
≥ 3000		63.6	70.5	75.5	79.7	80.6	82.7	83.8	83.9	85.5	86.2	86.2	87.1	87.2	87.5
≥ 2500		64.8	72.2	77.6	82.4	83.5	85.9	87.1	87.2	89.1	89.9	89.9	90.9	91.0	91.3
≥ 2000		65.7	73.4	79.0	84.1	85.3	87.9	89.2	89.3	91.3	92.3	92.3	93.3	93.4	93.8
≥ 1800		65.7	73.5	79.1	84.3	85.4	88.1	89.4	89.5	91.5	92.5	92.6	93.5	93.6	93.9
≥ 1500		65.9	73.8	79.5	84.8	86.0	88.8	90.2	90.3	92.4	93.4	93.5	94.5	94.6	94.9
≥ 1200		65.9	73.9	79.7	85.0	86.1	88.9	90.4	90.5	92.7	93.8	93.8	94.8	94.9	95.3
≥ 1000		65.9	73.9	79.7	85.0	86.1	89.0	90.5	90.6	92.9	94.1	94.1	95.1	95.2	95.5
≥ 900		65.9	73.9	79.7	85.0	86.1	89.0	90.5	90.6	92.9	94.1	94.1	95.1	95.2	95.6
≥ 800		65.9	73.9	79.7	85.0	86.1	89.0	90.6	90.7	93.0	94.2	94.2	95.2	95.3	95.7
≥ 700		65.9	73.9	79.7	85.0	86.2	89.1	90.7	90.8	93.1	94.4	94.4	95.5	95.6	95.9
≥ 600		65.9	73.9	79.7	85.0	86.2	89.2	90.8	91.0	93.3	94.5	94.5	95.6	95.7	96.1
≥ 500		65.9	73.9	79.7	85.0	86.2	89.2	90.8	91.0	93.4	94.8	94.8	96.0	96.2	96.5
≥ 400		65.9	73.9	79.7	85.1	86.3	89.3	90.8	91.0	93.5	94.9	95.0	96.2	96.4	96.8
≥ 300		65.9	73.9	79.7	85.1	86.3	89.3	90.8	91.1	93.5	95.0	95.0	96.4	96.5	97.0
≥ 200		65.9	73.9	79.7	85.1	86.3	89.3	90.8	91.1	93.5	95.1	95.1	96.8	97.0	97.6
≥ 100		65.9	73.9	79.7	85.1	86.3	89.3	90.8	91.1	93.6	95.1	95.2	96.9	97.1	97.9
≥ 0		66.0	74.0	79.8	85.1	86.3	89.3	90.9	91.1	93.6	95.1	95.2	97.0	97.1	98.0	100.0

TOTAL NUMBER OF OBSERVATIONS 6532

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54
STATION NAME YEARS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0700-0900

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	26	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
≥ UNL		52.5	61.9	64.8	66.1	66.1	67.6	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8
≥ 20000		55.8	64.0	67.4	68.6	68.6	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 18000		54.7	64.0	68.2	69.5	69.5	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 16000		54.7	64.8	68.2	69.5	69.5	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 14000		54.7	65.3	69.1	70.3	70.3	72.0	72.0	72.0	72.0	72.5	72.5	72.9	72.9	72.9	72.9
≥ 12000		55.1	65.7	69.9	71.2	71.2	72.9	72.9	72.9	72.9	73.3	73.3	73.7	73.7	73.7	73.7
≥ 10000		55.3	66.1	71.2	72.5	72.5	74.2	74.2	74.2	74.2	74.6	74.6	75.0	75.0	75.0	75.0
≥ 9000		55.5	66.1	71.2	72.5	72.5	74.2	74.2	74.2	74.2	74.6	74.6	75.0	75.0	75.0	75.0
≥ 8000		56.4	66.9	72.0	73.7	73.7	75.4	75.4	75.4	75.4	75.8	75.8	76.3	76.3	76.3	76.3
≥ 7000		58.5	69.1	75.0	76.7	76.7	78.4	78.4	78.4	78.4	78.8	78.8	79.2	79.2	79.2	79.2
≥ 6000		59.3	69.9	75.8	77.5	77.5	79.2	79.2	79.2	79.2	79.7	79.7	80.1	80.1	80.1	80.1
≥ 5000		61.0	72.0	78.0	80.5	80.5	82.2	82.2	82.2	82.2	82.6	82.6	83.1	83.1	83.1	83.1
≥ 4500		64.0	75.0	81.9	84.3	84.3	86.0	86.0	86.0	86.0	86.4	86.4	86.9	86.9	86.9	86.9
≥ 4000		67.4	78.4	85.2	88.6	88.6	90.3	90.3	90.3	90.3	90.7	90.7	91.1	91.1	91.1	91.1
≥ 3500		68.6	80.1	87.3	90.7	90.7	92.8	92.8	92.8	92.8	93.2	93.2	93.6	93.6	93.6	93.6
≥ 3000		69.5	80.9	89.4	92.8	92.8	95.8	95.8	95.8	96.2	96.6	96.6	97.0	97.0	97.0	97.0
≥ 2500		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.0	97.5	97.5	98.3	98.3	98.3	98.3
≥ 2000		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 1800		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 1500		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 1200		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 1000		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 900		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 800		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 700		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 600		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 500		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 400		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 300		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 200		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 100		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0
≥ 0		69.5	80.9	89.4	92.8	92.8	96.6	96.6	96.6	97.9	98.3	98.3	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 236

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

932/1 CAMP PAGE AAF KUNSAN/CHUCH'O [illegible] 02=54,03=62,04=67,70=71 [illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]=0500

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0		
[illegible]	49.4	55.4	62.0	63.1	63.1	64.0	64.0	64.0	64.8	64.9	64.9	65.7	65.9	66.1	66.1	
[illegible]	49.4	56.6	64.2	65.9	65.9	67.0	67.0	67.0	67.7	67.9	67.9	68.6	68.8	69.0	69.0	
[illegible]	49.4	56.6	64.2	65.9	65.9	67.0	67.0	67.0	67.7	67.9	67.9	68.6	68.8	69.0	69.0	
[illegible]	49.4	56.6	64.2	65.9	65.9	67.0	67.0	67.0	67.7	67.9	67.9	68.6	68.8	69.0	69.0	
[illegible]	50.0	57.2	64.9	66.6	66.8	68.1	68.1	68.1	68.8	69.0	69.0	69.7	69.9	70.1	70.1	
[illegible]	50.0	57.2	64.9	66.6	66.8	68.1	68.1	68.1	68.8	69.0	69.0	69.7	69.9	70.1	70.1	
[illegible]	50.6	57.7	65.7	67.3	67.5	68.8	68.8	68.8	69.6	69.7	69.7	70.5	70.7	70.9	70.9	
[illegible]	50.6	57.7	65.7	67.3	67.5	69.0	69.0	69.0	69.7	69.9	69.9	70.7	70.8	71.0	71.0	
[illegible]	52.0	59.2	67.2	68.6	69.0	70.5	70.5	70.5	71.2	71.4	71.4	72.1	72.3	72.5	72.5	
[illegible]	53.0	60.1	68.1	69.7	69.9	71.4	71.4	71.4	72.1	72.3	72.3	73.1	73.2	73.4	73.4	
[illegible]	54.1	61.4	69.4	71.2	71.4	72.9	72.9	72.9	73.6	73.8	73.8	74.5	74.7	74.9	74.9	
[illegible]	54.6	62.0	70.7	73.4	73.6	75.3	75.3	75.3	76.2	76.4	76.4	77.1	77.3	77.5	77.5	
[illegible]	55.4	62.9	71.6	74.5	74.7	76.8	77.1	77.1	77.9	78.0	78.0	78.8	79.0	79.2	79.2	
[illegible]	57.9	67.2	76.0	79.0	79.2	81.7	82.3	82.3	83.2	83.4	83.4	84.1	84.3	84.5	84.5	
[illegible]	59.0	69.0	78.6	81.5	81.7	84.5	85.1	85.1	86.0	86.2	86.2	86.9	87.1	87.3	87.3	
[illegible]	60.9	71.8	81.5	84.7	84.9	88.9	89.9	89.9	90.8	91.1	91.1	91.9	92.1	92.3	92.3	
[illegible]	62.2	73.0	83.4	86.5	86.7	90.8	92.1	92.1	93.4	93.7	93.7	94.5	94.6	94.8	94.8	
[illegible]	62.5	74.2	83.9	87.3	87.6	91.7	93.0	93.2	94.6	95.0	95.0	95.9	96.1	96.3	96.3	
[illegible]	62.7	74.4	84.1	87.5	87.8	91.9	93.2	93.4	94.8	95.2	95.2	96.1	96.3	96.5	96.5	
[illegible]	62.7	74.4	84.1	87.6	88.0	92.1	93.5	93.7	95.2	95.6	95.6	96.5	96.7	96.9	96.9	
[illegible]	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.6	96.1	96.1	97.0	97.2	97.4	97.4	
[illegible]	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.6	96.1	96.1	97.0	97.2	97.4	97.4	
[illegible]	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.6	96.1	96.1	97.0	97.2	97.4	97.4	
[illegible]	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.9	96.7	96.7	97.6	97.8	98.0	98.0	
[illegible]	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.9	96.7	96.7	97.6	97.8	98.0	98.0	
[illegible]	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.9	96.7	96.7	97.6	97.8	98.0	98.0	
5000	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.9	96.7	96.7	97.6	97.8	98.2	98.2	
4000	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.9	96.7	96.7	97.6	97.8	98.2	98.2	
3000	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	95.9	96.7	96.7	97.6	97.8	98.4	98.3	
2000	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	96.1	96.9	96.9	97.8	98.0	98.3	98.7	
1000	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	96.1	96.9	96.9	97.8	98.0	98.5	99.1	
0	62.7	74.4	84.1	87.6	88.2	92.3	93.9	94.1	96.1	96.9	96.9	97.8	98.0	98.5	100.0	

TOTAL NUMBER OF OBSERVATIONS 542

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 — CAMP PAGE AAF KOREA/CHUNCHON — 52-56,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0500-0800

CEILING FEET	VISIBILITY STATUTE MILES ≥10	≥6	≥5	≥4	≥3	≥2	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥1
NO CEILING		44.4	51.7	56.4	58.7	59.3	60.8	61.0	61.2	61.6	62.1	62.1	62.5	62.6	63.4	64.2
≥ 20000		46.3	54.2	59.5	62.2	62.7	64.6	64.9	65.1	65.6	66.2	66.2	66.6	66.6	67.4	68.4
≥ 8000		46.3	54.2	59.6	62.2	62.7	64.6	64.9	65.1	65.6	66.2	66.2	66.6	66.7	67.5	68.4
≥ 5000		46.4	54.2	59.7	62.3	62.8	64.7	65.0	65.2	65.7	66.3	66.3	66.7	66.8	67.6	68.4
≥ 3000		46.4	54.3	59.8	62.4	63.0	64.9	65.3	65.5	66.0	66.6	66.6	67.0	67.1	67.9	68.8
≥ 1500		46.7	54.7	60.2	62.8	63.4	65.3	65.7	65.9	66.5	67.1	67.1	67.5	67.6	68.4	69.2
≥ 1000		47.1	55.4	61.3	64.0	64.5	66.6	67.0	67.1	67.7	68.4	68.4	68.8	68.8	69.6	70.5
≥ 900		47.2	55.5	61.4	64.1	64.7	66.7	67.1	67.3	67.9	68.5	68.5	68.9	69.0	69.8	70.6
≥ 800		48.2	56.9	62.9	65.7	66.2	68.4	68.8	68.9	69.5	70.2	70.2	70.6	70.6	71.4	72.3
≥ 700		48.7	57.6	63.5	66.4	67.0	69.1	69.5	69.6	70.2	70.9	70.9	71.3	71.3	72.1	73.0
≥ 600		49.5	58.5	64.4	67.3	67.9	70.0	70.4	70.6	71.2	71.8	71.8	72.2	72.3	73.1	73.9
≥ 500		50.1	59.3	65.4	68.6	69.2	71.4	71.8	72.0	72.6	73.2	73.2	73.6	73.7	74.5	75.3
≥ 450		50.4	59.7	65.9	69.1	69.8	72.1	72.5	72.7	73.4	74.0	74.0	74.4	74.5	75.3	76.1
≥ 400		51.5	61.2	68.1	71.4	72.0	74.8	75.3	75.6	76.4	77.0	77.0	77.4	77.4	78.2	79.1
≥ 350		52.7	64.2	70.8	74.2	74.9	77.7	78.2	78.5	79.3	80.0	80.0	80.3	80.4	81.2	82.1
≥ 300		55.1	67.8	74.8	78.8	79.6	82.8	83.3	83.6	84.8	85.4	85.4	85.8	85.9	86.7	87.5
≥ 250		56.2	69.7	76.9	81.0	82.1	85.4	86.1	86.5	87.9	88.5	88.5	88.9	89.0	89.8	90.7
≥ 200		56.6	70.4	77.8	81.9	83.3	87.1	87.9	88.3	90.1	90.8	90.9	91.3	91.4	92.2	93.1
≥ 180		56.7	70.5	77.9	82.1	83.6	87.3	88.1	88.6	90.3	91.0	91.0	91.5	91.6	92.5	93.3
≥ 150		56.7	70.5	77.9	82.2	83.7	87.9	88.9	89.4	91.2	92.0	92.0	92.6	92.6	93.5	94.4
≥ 120		56.8	70.6	78.0	82.3	83.8	87.9	89.0	89.5	91.5	92.4	92.4	93.0	93.0	93.9	94.8
≥ 100		56.8	70.6	78.0	82.3	83.8	87.9	89.2	89.7	91.9	92.8	92.8	93.4	93.5	94.4	95.2
≥ 900		56.8	70.6	78.0	82.3	83.8	87.9	89.3	89.7	92.0	92.9	92.9	93.5	93.6	94.4	95.3
≥ 800		56.8	70.6	78.0	82.3	83.8	87.9	89.3	89.7	92.0	93.0	93.0	93.7	93.7	94.6	95.5
≥ 700		56.8	70.6	78.0	82.3	83.8	87.9	89.3	89.8	92.2	93.3	93.3	94.0	94.0	94.9	95.8
≥ 600		56.8	70.6	78.0	82.3	83.8	87.9	89.3	90.0	92.4	93.6	93.6	94.3	94.4	95.2	96.1
≥ 500		56.8	70.6	78.0	82.3	83.8	87.9	89.4	90.1	92.5	93.7	93.7	94.8	94.8	95.9	96.9
≥ 400		56.8	70.6	78.0	82.3	83.8	87.9	89.4	90.1	92.5	93.8	93.8	95.0	95.1	96.2	97.1
≥ 300		56.8	70.6	78.0	82.3	83.8	87.9	89.4	90.1	92.6	94.0	94.0	95.2	95.4	96.7	98.0
≥ 200		56.8	70.6	78.0	82.3	83.8	87.9	89.4	90.1	92.6	94.0	94.0	95.2	95.4	96.7	98.1
≥ 100		56.8	70.6	78.0	82.3	83.8	87.9	89.4	90.1	92.6	94.0	94.0	95.3	95.5	96.9	98.7
0		56.8	70.6	78.0	82.3	83.8	87.9	89.4	90.2	92.6	94.0	94.0	95.4	95.5	97.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1277

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-72 JAN
STATION NAME YEARS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-1100

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥⅞	≥⅝	≥½	≥0
NO CEILING	26.5	34.1	39.2	46.5	48.4	51.4	53.6	53.8	57.8	60.4	60.4	61.6	61.9	62.3	62.9
≥ 20000	27.9	35.9	41.4	49.8	51.9	55.2	57.5	57.8	62.7	65.4	65.5	66.8	67.0	67.5	68.1
≥ 8000	27.9	36.0	41.5	49.9	52.0	55.4	57.8	58.1	63.0	65.6	65.5	67.0	67.3	67.7	68.3
≥ 6500	27.9	36.0	41.5	50.0	52.1	55.5	58.0	58.2	63.1	65.8	65.9	67.2	67.4	67.9	68.4
≥ 5000	28.3	36.3	41.9	50.3	52.4	55.8	58.3	58.6	63.4	66.1	66.2	67.5	67.7	68.2	68.9
≥ 4000	28.3	36.5	42.0	50.6	52.7	56.2	58.7	58.9	63.9	66.6	66.7	68.0	68.2	68.7	69.2
≥ 3500	29.2	37.6	43.1	52.0	54.2	57.8	60.6	60.8	65.9	68.6	68.8	70.0	70.3	70.7	71.3
≥ 3000	29.2	37.6	43.2	52.2	54.3	58.0	60.8	61.0	66.0	68.8	68.9	70.2	70.4	70.9	71.4
≥ 2500	30.1	38.8	44.3	53.6	55.7	59.7	62.4	62.6	67.7	70.5	70.6	71.9	72.1	72.7	73.2
≥ 2000	30.3	39.0	44.6	54.0	56.1	60.4	63.2	63.4	68.4	71.3	71.4	72.8	73.0	73.6	74.1
≥ 1800	30.5	39.5	45.1	55.1	57.2	61.7	64.5	64.8	70.0	72.8	73.0	74.3	74.6	75.1	75.7
≥ 1500	30.9	40.0	45.5	55.8	57.9	62.4	65.4	65.6	70.9	73.7	73.9	75.2	75.4	76.0	76.6
≥ 1400	31.2	40.2	45.8	56.2	58.3	62.8	65.9	66.1	71.4	74.3	74.4	75.7	76.0	76.5	77.2
≥ 1300	31.9	41.1	47.0	58.2	60.6	65.3	68.4	68.7	74.3	77.4	77.6	78.9	79.1	79.7	80.4
≥ 1200	33.3	42.9	49.5	60.4	62.6	67.5	70.6	70.9	76.5	79.6	79.7	81.1	81.3	81.9	82.6
≥ 1000	35.1	45.2	51.7	63.0	65.8	71.2	74.6	74.8	80.8	84.1	84.3	85.6	85.9	86.5	87.3
≥ 900	36.3	46.7	53.5	65.0	67.8	73.6	77.2	77.4	83.6	87.1	87.3	88.7	88.9	89.6	90.3
≥ 800	36.7	47.1	53.9	65.7	68.6	74.5	78.2	78.4	84.9	89.2	89.3	90.9	91.1	91.8	92.5
≥ 700	36.7	47.3	54.2	66.0	68.9	74.8	78.5	78.7	85.2	89.6	89.7	91.3	91.5	92.2	92.9
≥ 600	36.7	47.4	54.5	66.5	69.5	75.7	79.5	79.8	86.5	90.9	91.1	92.6	92.9	93.5	94.3
≥ 500	36.9	47.6	54.6	66.7	69.8	76.0	80.1	80.5	87.4	92.0	92.2	93.7	94.0	94.6	95.4
≥ 400	36.9	47.6	54.6	66.7	69.8	76.1	80.3	80.7	87.7	92.2	92.4	94.0	94.2	94.8	95.6
≥ 300	36.9	47.6	54.6	66.7	69.8	76.1	80.3	80.7	87.8	92.4	92.5	94.1	94.3	95.0	95.8
≥ 200	36.9	47.6	54.6	66.8	69.9	76.2	80.7	81.1	88.1	92.8	92.9	94.6	94.9	95.5	96.3
≥ 100	36.9	47.6	54.6	66.8	69.9	76.2	80.8	81.2	88.2	93.0	93.2	94.8	95.1	95.8	96.5
≥ 0	36.9	47.6	54.6	66.8	69.9	76.2	80.8	81.2	88.4	93.4	93.6	95.3	95.7	96.3	97.1
	36.9	47.6	54.6	66.8	69.9	76.2	80.8	81.2	88.6	93.6	93.8	95.8	96.4	97.2	98.0
	36.9	47.6	54.6	66.8	69.9	76.2	80.8	81.2	88.5	93.9	94.0	96.2	96.8	97.6	98.4
	36.9	47.6	54.6	66.8	69.9	76.2	80.8	81.2	88.5	94.0	94.1	96.3	96.9	97.7	98.7
	36.9	47.6	54.6	66.8	69.9	76.2	80.8	81.2	88.5	94.0	94.2	96.4	97.0	97.9	99.1
	36.9	47.6	54.6	66.8	69.9	76.2	80.8	81.2	88.5	94.0	94.2	96.4	97.0	98.2	99.6
	37.0	47.6	54.7	66.9	69.9	76.3	80.9	81.3	88.5	94.0	94.3	96.5	97.1	98.3	100.0

TOTAL NUMBER OF OBSERVATIONS 1274

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAPE PAGE AFB, PUERTO/CHILE 52-54, 01-72

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

1200-1400

VISIBILITY STATUTE MILES

CEILING	≥10	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0
≥ 8000	65.8	53.1	57.6	61.2	62.2	62.9	63.7	63.7	64.0	64.3	64.4	64.4	64.4	64.4	64.4	64.4
≥ 7000	30.4	56.6	62.9	67.1	68.3	69.3	70.5	70.5	70.9	71.3	71.4	71.4	71.4	71.4	71.4	71.4
≥ 6000	30.5	57.0	63.1	67.4	68.5	69.5	70.7	70.7	71.2	71.6	71.6	71.6	71.6	71.6	71.6	71.6
≥ 5000	30.7	57.1	63.3	67.5	68.7	69.7	70.9	70.9	71.3	71.7	71.8	71.8	71.8	71.8	71.8	71.8
≥ 4500	31.5	58.1	64.2	68.6	69.7	70.7	72.0	72.0	72.4	72.8	72.8	72.8	72.8	72.8	72.8	72.8
≥ 4000	31.7	58.4	64.3	69.1	70.3	71.3	72.7	72.8	73.2	73.6	73.7	73.7	73.7	73.7	73.7	73.7
≥ 3500	32.5	59.4	65.6	70.3	71.4	72.4	73.9	74.0	74.4	74.8	74.9	74.9	74.9	74.9	74.9	74.9
≥ 3000	32.5	59.7	66.1	70.8	72.0	73.0	74.5	74.5	74.9	75.3	75.4	75.4	75.4	75.4	75.4	75.4
≥ 2500	34.1	61.4	68.2	73.2	74.5	75.6	77.0	77.1	77.5	78.1	78.2	78.2	78.2	78.2	78.2	78.2
≥ 2000	34.1	61.5	68.3	73.4	74.9	76.0	77.4	77.5	77.9	78.5	78.6	78.6	78.6	78.6	78.6	78.6
≥ 1800	34.3	61.6	68.4	73.6	75.4	76.8	78.3	78.6	78.8	79.4	79.5	79.5	79.5	79.5	79.5	79.5
≥ 1500	34.8	62.1	68.9	74.3	75.9	77.3	78.8	78.9	79.3	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 1200	35.7	63.0	69.8	75.2	76.8	78.2	79.8	79.9	80.3	80.8	80.9	80.9	80.9	80.9	80.9	80.9
≥ 1000	36.6	64.1	71.2	76.7	78.4	79.8	81.4	81.5	82.0	82.7	82.8	82.8	82.8	82.8	82.9	82.9
≥ 900	37.9	65.6	72.8	78.4	80.2	81.5	83.2	83.2	83.8	84.4	84.5	84.5	84.5	84.5	84.7	84.7
≥ 800	38.9	69.1	76.9	83.0	84.9	86.7	88.6	88.6	89.5	90.2	90.2	90.2	90.2	90.4	90.4	90.4
≥ 700	62.4	70.8	78.8	85.2	87.2	89.1	91.1	91.2	92.2	92.9	93.0	93.0	93.0	93.2	93.2	93.2
≥ 600	63.1	71.6	79.9	86.4	88.3	90.5	92.5	92.7	94.0	94.7	94.8	94.8	94.8	94.9	94.9	94.9
≥ 500	63.3	72.0	80.3	86.6	88.7	90.9	93.0	93.2	94.5	95.2	95.3	95.3	95.3	95.5	95.5	95.5
≥ 400	63.7	72.5	80.9	87.3	89.7	92.0	94.3	94.4	95.8	96.9	96.9	96.9	96.9	97.1	97.1	97.1
≥ 300	63.7	72.5	80.9	87.4	89.8	92.2	94.4	94.7	96.2	97.1	97.2	97.2	97.2	97.3	97.3	97.3
≥ 200	63.7	72.5	80.9	87.4	89.8	92.2	94.4	94.7	96.5	97.3	97.4	97.4	97.4	97.6	97.6	97.6
≥ 100	63.7	72.5	80.9	87.4	89.8	92.2	94.5	94.8	96.5	97.4	97.5	97.5	97.5	97.7	97.7	97.7
0	63.7	72.5	80.9	87.4	89.8	92.2	94.6	94.8	96.6	97.5	97.6	97.7	97.7	97.9	97.9	97.9
≥ 7000	63.7	72.5	80.9	87.4	89.8	92.2	94.6	94.9	96.9	98.1	98.1	98.4	98.4	98.5	98.5	98.5
≥ 6000	63.7	72.5	80.9	87.4	89.8	92.2	94.6	94.9	97.1	98.3	98.4	98.7	98.7	98.9	98.9	98.9
≥ 5000	63.7	72.5	80.9	87.4	89.8	92.3	94.7	95.1	97.3	98.5	98.6	99.0	99.0	99.2	99.2	99.2
≥ 4000	63.7	72.5	80.9	87.4	89.8	92.3	94.7	95.2	97.3	98.8	98.9	99.3	99.3	99.4	99.4	99.4
≥ 3000	63.7	72.5	80.9	87.4	89.8	92.3	94.7	95.2	97.4	98.9	99.0	99.4	99.4	99.6	99.6	99.6
≥ 2000	63.7	72.5	80.9	87.4	89.8	92.3	94.7	95.2	97.4	98.9	99.0	99.4	99.4	99.7	99.7	99.7
≥ 1000	63.7	72.5	80.9	87.4	89.8	92.3	94.7	95.2	97.4	98.9	99.0	99.4	99.4	99.8	99.8	99.8
0	64.0	72.8	81.1	87.7	90.0	92.5	94.9	95.4	97.7	99.1	99.2	99.6	99.7	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1241

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHON 52-54,61-72 JAN

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1300-1700

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥9	≥8	≥7	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0
≥ 20000	61.0	63.0	63.7	64.1	64.1	64.2	64.2	64.2	64.3	64.3	64.3	64.3	64.3	64.3	64.3
≥ 15000	67.7	70.3	71.5	71.9	71.9	72.0	72.0	72.0	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 10000	67.8	70.4	71.7	72.2	72.2	72.3	72.3	72.3	72.4	72.4	72.4	72.4	72.4	72.4	72.4
≥ 9000	68.0	70.6	71.9	72.4	72.4	72.4	72.4	72.4	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 8000	68.2	70.8	72.1	72.6	72.6	72.7	72.7	72.7	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 7000	68.2	70.8	72.1	72.6	72.6	72.7	72.7	72.7	72.9	72.9	72.9	73.0	73.0	73.0	73.0
≥ 6000	69.8	72.4	73.7	74.2	74.2	74.3	74.3	74.3	74.5	74.5	74.5	74.6	74.6	74.6	74.6
≥ 5000	69.8	72.9	74.1	74.6	74.6	74.7	74.7	74.7	74.9	74.9	74.9	75.0	75.0	75.0	75.0
≥ 4500	71.6	75.2	76.5	77.3	77.3	77.4	77.4	77.4	77.6	77.6	77.6	77.7	77.7	77.7	77.7
≥ 4000	72.5	76.2	77.5	78.5	78.5	78.6	78.7	78.7	78.9	78.9	78.9	79.0	79.0	79.0	79.0
≥ 3500	73.0	76.7	78.1	79.1	79.1	79.2	79.3	79.3	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 3000	73.7	77.3	78.9	80.3	80.3	80.4	80.5	80.5	80.6	80.7	80.7	80.8	80.8	80.8	80.8
≥ 2500	74.6	78.2	79.7	81.2	81.2	81.3	81.5	81.5	81.7	81.7	81.7	81.8	81.8	81.8	81.8
≥ 2000	76.3	80.0	81.7	83.3	83.3	83.5	83.7	83.7	83.9	83.9	83.9	84.0	84.0	84.0	84.0
≥ 1800	77.9	81.7	83.5	85.3	85.3	85.5	85.6	85.6	85.9	86.0	86.0	86.1	86.1	86.1	86.1
≥ 1500	81.0	85.0	87.5	89.8	89.8	90.3	90.5	90.5	90.9	91.0	91.0	91.2	91.2	91.2	91.2
≥ 1200	83.0	87.5	90.2	93.0	93.2	93.7	93.9	93.9	94.3	94.5	94.5	94.8	94.8	94.8	94.8
≥ 1000	83.7	88.4	91.3	94.1	94.3	94.9	95.2	95.2	95.7	95.9	95.9	96.1	96.1	96.1	96.1
≥ 900	83.9	88.7	91.5	94.3	94.7	95.3	95.5	95.5	96.0	96.2	96.2	96.4	96.4	96.4	96.4
≥ 800	84.4	89.3	92.2	95.4	95.9	96.4	96.7	96.7	97.3	97.5	97.5	97.9	97.9	97.9	97.9
≥ 700	84.4	89.3	92.2	95.4	95.9	96.4	96.8	96.9	97.5	97.8	97.8	98.1	98.1	98.1	98.1
≥ 600	84.4	89.3	92.3	95.4	95.9	96.5	96.9	97.0	98.0	98.2	98.2	98.7	98.7	98.8	98.8
≥ 500	84.4	89.3	92.3	95.4	95.9	96.6	97.0	97.1	98.1	98.5	98.5	99.0	99.0	99.1	99.1
≥ 400	84.4	89.3	92.3	95.4	95.9	96.6	97.2	97.4	98.5	98.8	98.8	99.3	99.3	99.4	99.4
≥ 300	84.4	89.3	92.3	95.4	95.9	96.6	97.2	97.4	98.5	98.9	98.9	99.5	99.5	99.6	99.6
≥ 200	84.4	89.3	92.3	95.4	95.9	96.7	97.3	97.5	98.6	99.0	99.0	99.6	99.6	99.7	99.7
≥ 100	84.4	89.3	92.3	95.4	95.9	96.7	97.3	97.5	98.6	99.0	99.0	99.8	99.8	99.9	99.9
≥ 0	84.4	89.3	92.3	95.4	95.9	96.7	97.3	97.5	98.6	99.0	99.1	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1163

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

47271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 52-54,61-67 (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1100-2000

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0	≥0	≥0	≥0	≥0
NO CEILING		55.6	60.0	62.3	64.6	64.6	65.2	65.6	65.6	66.0	66.0	66.4	66.0	66.2	66.2	66.2
≥ 20000		60.4	65.2	67.9	70.8	70.8	71.3	71.7	71.7	72.1	72.1	72.1	72.1	72.3	72.3	72.3
≥ 18000		60.4	65.2	67.9	70.8	70.8	71.7	72.1	72.1	72.5	72.7	72.7	72.9	73.1	73.1	73.1
≥ 16000		61.2	66.0	68.7	71.5	71.5	72.5	72.9	72.9	73.7	73.8	73.8	74.0	74.2	74.2	74.2
≥ 14000		61.5	66.3	69.0	71.9	71.9	72.9	73.3	73.3	74.0	74.2	74.2	74.4	74.5	74.6	74.6
≥ 12000		61.5	66.3	69.0	71.9	71.9	72.9	73.3	73.3	74.0	74.2	74.2	74.4	74.6	74.6	74.6
≥ 10000		61.9	66.7	69.4	72.3	72.3	73.3	73.7	73.7	74.4	74.6	74.6	74.8	75.0	75.0	75.0
≥ 9000		61.9	66.7	69.4	72.3	72.5	73.5	74.0	74.0	74.8	75.0	75.0	75.2	75.4	75.4	75.4
≥ 8000		62.7	68.3	71.2	74.2	74.4	75.4	76.3	76.3	77.1	77.3	77.3	77.5	77.7	77.7	77.7
≥ 7000		63.1	68.7	71.5	74.6	74.8	76.0	76.9	76.9	77.7	78.3	78.3	78.5	78.7	78.7	78.7
≥ 6000		63.8	69.4	72.3	75.6	75.8	77.1	78.1	78.1	78.8	79.4	79.4	79.6	79.8	79.8	79.8
≥ 5000		65.0	70.6	74.0	77.7	77.9	79.2	80.2	80.2	81.0	81.5	81.5	81.7	81.9	81.9	81.9
≥ 4500		66.7	72.5	76.0	79.6	79.8	81.2	82.1	82.1	82.9	83.7	83.7	83.8	84.0	84.0	84.0
≥ 4000		67.5	73.8	77.3	81.3	81.5	83.3	84.6	84.6	85.4	86.2	86.2	86.7	86.9	86.9	86.9
≥ 3500		69.0	75.4	78.8	82.9	83.5	85.2	86.5	86.5	87.5	88.3	88.3	88.8	89.0	89.0	89.0
≥ 3000		71.3	78.3	81.7	85.8	86.5	89.0	90.6	90.6	91.7	92.5	92.7	93.3	93.5	93.5	93.5
≥ 2500		72.3	79.2	82.7	86.9	87.7	90.4	91.9	91.9	93.8	95.0	95.2	95.8	96.0	96.0	96.0
≥ 2000		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	95.2	96.5	96.7	97.7	97.9	97.9	97.9
≥ 1800		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	95.2	96.5	96.7	97.7	97.9	97.9	97.9
≥ 1500		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	95.6	96.9	97.1	98.1	98.3	98.3	98.3
≥ 1200		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	95.6	96.9	97.1	98.1	98.3	98.3	98.3
≥ 1000		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.5	97.7	98.7	98.8	99.0	99.0
≥ 900		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.5	97.7	98.7	98.8	99.0	99.0
≥ 800		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	98.8	99.0	99.2	99.2
≥ 700		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	98.8	99.0	99.2	99.2
≥ 600		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	98.8	99.0	99.2	99.2
≥ 500		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	99.2	99.4	99.6	99.6
≥ 400		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	99.2	99.4	99.6	99.8
≥ 300		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	99.2	99.4	99.8	99.8
≥ 200		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	99.4	99.6	100.0	100.0
≥ 100		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	99.4	99.6	100.0	100.0
≥ 0		72.5	79.6	83.3	87.9	88.8	91.5	93.1	93.1	96.2	97.7	97.9	99.4	99.6	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 520

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-54 (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥	≥	≥			
		55.2	62.2	64.4	65.7	67.0	67.8	67.8	67.8	67.8	68.2	68.2	68.2	68.2	68.2
		59.7	67.0	69.1	71.7	73.0	73.8	73.8	73.8	73.8	74.2	74.2	74.2	74.2	74.2
		59.7	67.0	69.1	71.7	73.0	73.8	73.8	73.8	73.8	74.2	74.2	74.2	74.2	74.2
		59.7	67.4	70.0	72.5	73.8	74.7	74.7	74.7	75.1	76.0	76.0	76.0	76.0	76.0
		59.7	67.4	71.2	73.8	75.1	76.0	76.0	76.0	76.4	77.7	77.7	77.7	77.7	77.7
		59.7	67.4	71.7	74.2	75.5	76.4	76.4	76.4	76.8	78.1	78.1	78.1	78.1	78.1
		59.7	67.4	72.1	74.7	76.0	76.8	76.8	76.8	77.3	78.5	78.5	78.5	78.5	78.5
		59.7	67.4	72.1	74.7	76.0	76.8	76.8	76.8	77.3	78.5	78.5	78.5	78.5	78.5
		59.7	67.4	72.1	76.0	77.3	78.1	78.1	78.1	78.5	79.8	79.8	79.8	79.8	79.8
		60.9	68.7	74.7	78.5	79.8	80.7	80.7	80.7	81.1	82.4	82.4	82.4	82.4	82.4
		60.9	68.7	74.7	78.5	79.8	80.7	80.7	80.7	81.1	82.4	82.4	82.4	82.4	82.4
		63.1	70.8	77.7	81.5	82.8	83.7	83.7	83.7	84.1	85.4	85.4	85.4	85.4	85.4
		64.4	72.1	79.0	82.8	84.1	85.0	85.0	85.0	85.4	86.7	86.7	86.7	86.7	86.7
		67.0	75.0	84.1	88.0	89.3	90.6	90.6	90.6	91.0	92.3	92.3	92.3	92.3	92.3
		68.2	77.3	85.8	89.7	91.0	92.3	92.3	92.3	92.7	94.0	94.0	94.0	94.0	94.0
		68.7	78.5	87.1	91.0	92.7	95.3	95.3	95.3	97.0	98.3	98.3	98.3	98.3	98.3
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0
		68.7	78.5	87.1	91.0	92.7	95.7	95.7	95.7	97.4	99.6	99.6	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 233

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-54 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0700

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥ 0	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥1	≥1		≥5/16	≥1/4	≥0
UNLIMITED		60.4	60.8	62.4	63.5	63.5	63.5	64.7	64.7	65.1	65.1	65.1	65.1	65.1	65.1
≥ 20000		61.6	62.0	63.5	64.7	64.7	64.7	65.9	65.9	66.3	66.3	66.3	66.3	66.3	66.3
≥ 8000		62.0	62.4	63.9	65.1	65.1	65.1	66.3	66.3	66.7	66.7	66.7	66.7	66.7	66.7
≥ 10000		63.5	63.9	65.5	66.7	66.7	66.7	67.8	67.8	68.2	68.2	68.2	68.2	68.2	68.2
≥ 4000		63.9	64.3	66.3	67.5	67.5	67.5	68.6	68.6	69.0	69.0	69.0	69.0	69.0	69.0
≥ 12000		64.3	64.7	66.7	67.8	67.8	67.8	69.0	69.0	69.4	69.4	69.4	69.4	69.4	69.4
≥ 9000		65.9	67.5	69.4	70.6	70.6	70.6	71.8	71.8	72.2	72.2	72.2	72.2	72.2	72.2
≥ 9000		65.9	67.5	69.4	70.6	70.6	70.6	71.8	71.8	72.2	72.2	72.2	72.2	72.2	72.2
≥ 8000		67.8	69.4	71.4	72.5	72.5	72.5	74.1	74.1	74.5	74.5	74.5	74.5	74.5	74.5
≥ 7000		69.0	70.6	72.5	73.7	73.7	73.7	75.3	75.3	75.7	75.7	75.7	75.7	75.7	75.7
≥ 6000		69.0	70.6	72.5	73.7	74.1	74.1	75.7	75.7	76.1	76.1	76.1	76.1	76.1	76.1
≥ 5000		73.3	74.9	76.9	78.0	78.4	78.8	80.4	80.4	80.8	80.8	80.8	80.8	80.8	80.8
≥ 4500		75.7	77.3	79.6	80.8	81.2	81.6	83.1	83.1	83.5	83.5	83.5	83.5	83.5	83.5
≥ 4000		78.0	80.0	82.7	83.9	84.3	84.7	86.3	86.3	86.7	86.7	86.7	86.7	86.7	87.1
≥ 3500		79.2	81.2	84.7	85.9	86.3	86.7	88.2	88.2	88.6	88.6	88.6	88.6	88.6	89.0
≥ 3000		80.8	83.1	87.3	88.6	89.0	89.4	91.0	91.0	91.4	91.4	91.4	91.8	91.8	92.2
≥ 2500		81.6	83.9	88.2	89.4	89.8	90.2	92.2	92.2	93.3	93.3	93.3	93.7	93.7	94.1
≥ 2000		82.7	85.9	90.2	91.4	91.8	92.2	94.1	94.1	95.3	95.3	95.3	95.7	95.7	96.1
≥ 1800		82.7	85.9	90.2	91.4	91.8	92.2	94.1	94.1	95.3	95.3	95.3	95.7	95.7	96.1
≥ 1500		82.7	85.9	90.2	92.2	92.5	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	96.9
≥ 1200		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.0
≥ 1000		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.0
≥ 900		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.0
≥ 800		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.0
≥ 700		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.0
≥ 600		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.0
≥ 500		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4
≥ 400		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4
≥ 300		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4
≥ 200		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4
≥ 100		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4
≥ 0		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4

≥ 300		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4 100.0
≥ 200		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4 100.0
≥ 100		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4 100.0
≥ 0		82.7	85.9	91.4	93.3	93.7	94.1	96.1	96.1	97.3	97.3	97.3	97.6	97.6	98.4 100.0

TOTAL NUMBER OF OBSERVATIONS 255

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 (STATION NUMBER) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 52-54,61,64-67,70-71 (YEARS) (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

(HOURS) 0300-0600

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	0		
NO CEILING		56.2	59.2	62.4	63.4	64.0	64.4	64.4	64.4	64.6	64.8	64.8	64.8	65.1	65.1	65.1
≥ 20000		57.8	61.0	64.4	65.5	66.1	66.7	66.7	66.7	66.9	67.1	67.1	67.1	67.3	67.3	67.3
≥ 18000		57.8	61.0	64.4	65.5	66.1	66.7	66.7	66.7	66.9	67.1	67.1	67.1	67.3	67.3	67.3
≥ 16000		58.6	61.8	65.3	66.3	66.9	67.5	67.5	67.5	67.7	67.9	67.9	67.9	68.1	68.1	68.1
≥ 14000		59.2	62.4	66.1	67.1	67.7	68.3	68.3	68.3	68.5	68.7	68.7	68.7	68.9	68.9	68.9
≥ 12000		59.4	62.8	66.5	67.5	68.1	68.7	68.7	68.7	68.9	69.1	69.1	69.1	69.3	69.3	69.3
≥ 10000		60.6	64.0	67.7	68.7	69.7	70.3	70.3	70.3	70.5	70.7	70.7	70.7	70.9	70.9	70.9
≥ 9000		60.8	64.6	68.5	69.5	70.5	71.1	71.1	71.1	71.3	71.5	71.5	71.5	71.7	71.7	71.7
≥ 8000		62.6	66.7	70.5	71.5	72.5	73.1	73.3	73.3	73.5	73.7	73.7	73.7	73.9	73.9	73.9
≥ 7000		63.4	67.7	71.7	72.7	73.7	74.3	74.5	74.5	74.7	74.9	74.9	74.9	75.2	75.2	75.2
≥ 6000		64.2	68.5	72.5	73.5	74.5	75.2	75.4	75.4	75.6	75.8	75.8	75.8	76.0	76.0	76.0
≥ 5000		66.1	70.3	74.7	75.8	77.0	77.6	77.6	77.8	78.0	78.2	78.2	78.2	78.4	78.4	78.4
≥ 4500		66.5	70.9	75.2	76.2	77.6	78.2	78.4	78.4	78.6	78.8	78.8	78.8	79.0	79.0	79.0
≥ 4000		69.1	74.1	79.0	80.0	81.4	82.2	82.4	82.4	82.6	82.8	82.8	82.8	83.0	83.0	83.0
≥ 3500		71.7	77.8	82.8	83.8	85.3	86.1	86.3	86.3	86.5	86.7	86.7	86.7	86.9	86.9	86.9
≥ 3000		73.9	80.0	85.9	87.5	88.9	89.9	90.1	90.1	90.3	90.5	90.5	90.5	90.7	90.7	90.7
≥ 2500		74.1	81.0	86.3	87.9	89.5	90.9	91.3	91.3	91.5	91.9	91.9	91.9	92.1	92.1	92.1
≥ 2000		75.4	82.0	88.1	90.1	92.3	93.7	94.1	94.1	94.3	94.9	94.9	95.0	96.2	96.4	96.4
≥ 1800		75.4	82.6	88.1	90.1	92.3	93.7	94.1	94.1	94.3	94.9	94.9	95.0	96.2	96.4	96.4
≥ 1500		75.6	82.8	88.5	91.1	93.5	94.9	95.6	95.6	95.8	96.6	96.6	97.6	98.2	98.2	98.2
≥ 1200		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.4	97.2	97.2	98.2	98.6	98.8	98.8
≥ 1000		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.4	97.2	97.2	98.2	98.6	99.0	99.0
≥ 900		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.6	97.6	98.6	99.0	99.4	99.4
≥ 800		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	98.8	99.2	99.6	99.6
≥ 700		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	99.0	99.4	99.6	99.8
≥ 600		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.6	97.8	99.0	99.4	99.8	99.8
≥ 500		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	99.0	99.4	99.8	99.8
≥ 400		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	99.0	99.4	99.8	99.8
≥ 300		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	99.0	99.4	100.0	100.0
≥ 200		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	99.0	99.4	100.0	100.0
≥ 100		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	99.0	99.4	100.0	100.0
≥ 0		76.0	83.2	88.9	91.5	93.9	95.4	96.0	96.0	96.8	97.8	97.8	99.0	99.4	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 495

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0	≥5/16		≥0	
NO CEILING		45.2	52.1	55.6	57.6	58.6	60.2	61.0	61.0	61.1	61.2	61.2	61.4	61.4	61.5	62.2
		47.8	55.4	59.2	61.6	62.4	64.2	65.1	65.1	65.2	65.4	65.4	65.5	65.5	66.1	66.3
≥ 25000		47.8	55.4	59.2	61.6	62.4	64.2	65.1	65.1	65.2	65.4	65.4	65.5	65.5	66.1	66.3
≥ 20000		47.9	55.5	59.3	61.7	62.6	64.4	65.3	65.3	65.4	65.5	65.5	65.7	65.7	66.4	66.5
≥ 14000		48.2	55.8	59.7	62.1	63.0	64.8	65.6	65.6	65.7	65.9	65.9	66.1	66.1	66.6	66.8
≥ 12000		48.4	56.0	59.9	62.3	63.2	65.0	65.9	65.9	66.0	66.1	66.1	66.3	66.3	66.8	67.1
≥ 10000		49.1	56.9	60.8	63.2	64.1	66.0	66.9	66.8	66.9	67.1	67.1	67.3	67.3	67.8	68.0
≥ 9000		49.4	57.3	61.3	63.7	64.6	66.5	67.4	67.4	67.4	67.6	67.6	67.8	67.8	68.3	68.6
≥ 8000		50.3	58.2	62.3	65.1	66.0	68.0	69.0	69.0	69.1	69.3	69.3	69.4	69.4	69.9	70.2
≥ 7000		51.2	59.2	63.5	66.3	67.3	69.3	70.3	70.3	70.4	70.6	70.6	70.7	70.7	71.2	71.5
≥ 6000		52.1	60.1	64.7	67.8	68.8	71.0	71.9	71.9	72.0	72.2	72.2	72.4	72.4	72.9	73.1
≥ 5000		53.0	61.1	65.7	69.0	70.0	72.2	73.1	73.1	73.2	73.4	73.4	73.6	73.6	74.1	74.4
≥ 4500		53.5	61.7	66.2	69.5	70.6	72.7	73.7	73.7	73.7	73.9	73.9	74.1	74.1	74.6	74.9
≥ 4000		55.5	64.4	69.3	72.6	73.7	76.3	77.3	77.3	77.5	77.6	77.6	77.8	77.8	78.3	78.6
≥ 3500		57.1	66.6	71.7	75.2	76.3	78.8	80.0	80.0	80.2	80.5	80.5	80.7	80.7	81.2	81.4
≥ 3000		60.4	70.5	75.9	79.8	81.1	83.9	85.1	85.1	85.5	85.9	85.9	86.2	86.2	86.7	87.0
≥ 2500		62.6	73.0	79.1	83.2	85.0	88.3	89.5	89.6	90.0	90.6	90.6	90.8	90.8	91.4	91.6
≥ 2000		63.2	73.8	80.5	84.9	86.8	90.3	91.6	91.7	92.6	93.2	93.2	93.6	93.6	94.1	94.4
≥ 1800		63.2	73.9	80.6	85.0	87.0	90.5	91.8	91.9	92.8	93.4	93.4	93.9	93.9	94.4	94.6
≥ 1500		63.3	74.0	80.7	85.1	87.1	91.1	92.7	92.7	94.0	94.7	94.7	95.2	95.2	95.7	95.9
≥ 1200		63.3	74.0	80.7	85.1	87.1	91.3	93.0	93.1	94.4	95.1	95.1	95.6	95.6	96.1	96.4
≥ 1000		63.4	74.1	80.7	85.2	87.2	91.4	93.3	93.6	95.0	95.7	95.7	96.3	96.3	96.8	97.1
≥ 900		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.5	96.2	96.3	96.9	96.9	97.4	97.7
≥ 800		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.5	96.2	96.4	97.0	97.0	97.5	97.8
≥ 700		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.7	96.4	96.5	97.2	97.2	97.7	97.9
≥ 600		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.9	96.5	96.7	97.3	97.3	97.8	98.1
≥ 500		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.9	96.6	96.8	97.5	97.6	98.5	98.8
≥ 400		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.9	96.6	96.8	97.5	97.6	98.5	98.9
≥ 300		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.9	96.6	96.8	97.5	97.6	98.7	99.1
≥ 200		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.9	96.6	96.8	97.8	97.8	99.2	99.5
≥ 100		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.9	96.6	96.8	97.8	97.9	99.1	99.8
≥ 0		63.4	74.1	80.7	85.2	87.2	91.5	93.4	93.9	95.9	96.6	96.8	97.8	97.9	99.1	100.0

TOTAL NUMBER OF OBSERVATIONS 1159

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF ARREA/CHINCH 52-54,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0	
≥ UNL	35.3	41.1	44.8	49.7	51.3	53.4	55.4	55.7	57.9	60.3	60.8	61.3	61.8	62.3
≥ 20000	38.8	45.5	49.6	55.1	56.7	59.0	61.2	61.5	63.9	66.4	66.8	67.3	67.8	68.3
≥ 15000	38.9	45.6	49.7	55.3	56.9	59.1	61.4	61.6	64.1	66.6	66.9	67.3	67.8	68.3
≥ 12000	38.9	45.6	49.7	55.3	56.9	59.1	61.4	61.6	64.2	66.6	66.9	67.3	67.8	68.3
≥ 10000	39.1	45.9	50.1	55.7	57.4	59.7	61.9	62.2	64.7	67.2	67.5	67.9	68.4	68.9
≥ 9000	39.7	46.6	50.9	56.7	58.4	60.7	62.9	63.2	65.7	68.2	68.5	68.9	69.4	69.9
≥ 8000	41.0	48.2	52.5	58.4	60.1	62.3	64.7	64.9	67.5	70.1	70.4	70.8	71.3	71.8
≥ 7000	40.7	48.3	52.6	58.4	60.2	62.4	64.7	65.0	67.6	70.2	70.5	70.9	71.4	71.9
≥ 6000	41.5	49.1	53.6	59.5	61.2	63.4	65.7	66.0	68.7	71.2	71.5	71.9	72.4	72.9
≥ 5000	41.6	49.6	54.1	59.9	61.7	64.0	66.3	66.7	69.3	71.9	72.2	72.6	73.1	73.6
≥ 4500	42.9	51.0	55.5	61.4	63.4	65.6	68.4	68.7	72.4	74.0	74.3	74.5	74.9	75.4
≥ 4000	44.4	52.7	57.3	63.4	65.4	67.7	70.6	70.9	74.7	76.2	76.5	76.7	77.1	77.6
≥ 3500	44.6	53.0	57.8	64.0	66.0	68.3	71.4	71.7	75.5	77.1	77.4	77.6	78.0	78.5
≥ 3000	45.6	54.4	59.8	66.1	68.3	70.7	73.9	74.2	78.0	79.6	79.8	80.1	80.5	81.0
≥ 2500	46.7	55.9	61.6	68.1	70.3	72.8	76.1	76.5	80.4	82.2	82.5	82.8	83.2	83.7
≥ 2000	49.1	59.1	65.1	71.7	74.1	76.9	80.3	80.8	84.7	86.8	86.3	87.3	87.8	88.3
≥ 1500	50.6	60.9	67.3	74.3	76.9	80.0	83.4	84.0	88.0	90.3	90.8	90.8	91.3	91.8
≥ 1000	51.1	61.7	68.2	75.3	78.1	81.2	84.7	85.2	89.8	92.3	92.8	92.9	93.4	93.9
≥ 800	51.3	61.9	68.4	75.7	78.2	81.4	84.9	85.3	90.2	92.7	93.2	93.3	93.8	94.3
≥ 600	51.6	62.4	68.9	76.3	79.0	82.2	85.9	86.6	91.7	94.6	94.9	95.2	95.8	96.3
≥ 500	51.6	62.5	69.0	76.6	79.2	82.6	86.3	87.1	92.2	95.3	95.8	95.9	96.5	97.0
≥ 400	51.8	62.7	69.3	77.1	79.7	83.2	87.0	87.8	93.5	96.6	96.8	97.2	97.8	98.3
≥ 300	51.8	62.7	69.3	77.1	79.7	83.3	87.1	87.9	93.8	96.9	96.9	97.7	97.7	98.2
≥ 200	51.8	62.7	69.3	77.2	79.9	83.4	87.2	88.1	94.0	97.1	97.1	97.8	97.8	98.2
≥ 100	51.8	62.7	69.3	77.2	79.9	83.4	87.3	88.2	94.2	97.4	97.4	98.2	98.2	98.5
≥ 000	51.9	62.8	69.4	77.3	80.1	83.6	87.6	88.4	94.5	97.7	97.7	98.4	98.4	98.8
≥ 500	51.9	62.8	69.4	77.3	80.1	83.6	87.7	88.5	94.6	97.9	97.9	98.8	98.8	99.1
≥ 400	51.9	62.8	69.4	77.3	80.1	83.6	87.7	88.5	94.6	97.9	97.9	98.8	98.9	99.2
≥ 300	51.9	62.8	69.4	77.3	80.1	83.6	87.7	88.5	94.6	98.0	98.0	98.9	99.1	99.5
≥ 200	51.9	62.8	69.4	77.3	80.1	83.6	87.7	88.5	94.6	98.0	98.0	98.9	99.1	99.5
≥ 100	51.9	62.8	69.4	77.3	80.1	83.6	87.7	88.5	94.6	98.0	98.0	98.9	99.1	99.5
≥ 0	52.0	62.8	69.5	77.4	80.2	83.7	87.8	88.6	94.7	98.1	98.1	99.0	99.1	99.1	100.0

TOTAL NUMBER OF OBSERVATIONS 1160

1
2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AFB KOREA/CHUCHON 52-54,61-72 FEB

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1400-1400

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥ 7	6	5	4	3	2½	2	1½	1	¾	½	¼	0
≥ 22000	53.6	56.0	56.9	61.5	61.8	62.4	62.7	62.7	62.7	62.7	62.7	62.7	62.7	62.7	62.7
≥ 20000	60.1	63.7	67.1	68.6	69.2	69.9	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2	70.2
≥ 18000	60.1	63.8	67.1	68.9	69.3	70.0	70.2	70.2	70.2	70.3	70.3	70.3	70.3	70.3	70.3
≥ 17000	60.5	64.2	67.5	69.4	69.7	70.4	70.7	70.7	70.7	70.8	70.8	70.8	70.8	70.8	70.8
≥ 14000	61.1	64.9	68.2	70.1	70.4	71.1	71.5	71.5	71.5	71.6	71.6	71.6	71.6	71.6	71.6
≥ 12000	61.6	65.5	68.7	70.6	70.9	71.7	72.0	72.0	72.0	72.1	72.1	72.1	72.1	72.1	72.1
≥ 11000	62.4	66.3	69.5	71.5	71.8	72.6	73.1	73.1	73.2	73.3	73.3	73.3	73.3	73.3	73.3
≥ 9500	62.7	66.6	69.8	71.8	72.2	73.0	73.4	73.4	73.5	73.6	73.6	73.6	73.6	73.6	73.6
≥ 8000	63.3	68.0	71.4	73.3	73.7	74.5	74.9	74.9	75.0	75.1	75.1	75.1	75.1	75.1	75.1
≥ 7000	64.1	68.5	71.9	74.0	74.3	75.2	75.7	75.7	75.8	75.9	75.9	75.9	75.9	75.9	75.9
≥ 6000	65.4	69.7	73.2	75.2	75.6	76.6	77.1	77.1	77.2	77.3	77.3	77.3	77.3	77.3	77.3
≥ 5000	66.4	71.1	74.6	76.8	77.2	78.2	78.7	78.7	78.8	78.9	78.9	78.9	78.9	78.9	78.9
≥ 4500	67.1	71.8	75.3	77.5	77.9	78.9	79.5	79.5	79.6	79.7	79.7	79.7	79.7	79.7	79.7
≥ 4000	68.4	73.2	76.7	79.1	79.5	80.5	81.0	81.0	81.2	81.5	81.5	81.5	81.5	81.5	81.5
≥ 3500	70.6	75.5	79.3	81.8	82.4	83.3	83.9	83.9	84.1	84.6	84.6	84.6	84.6	84.6	84.6
≥ 3000	73.7	78.8	83.0	85.8	86.6	87.9	88.8	88.8	89.0	89.5	89.5	89.5	89.5	89.5	89.5
≥ 2500	75.5	81.1	85.6	88.7	89.6	91.1	92.1	92.1	92.4	93.2	93.2	93.2	93.2	93.2	93.2
≥ 2200	75.9	81.6	86.6	89.9	91.0	92.6	93.7	93.7	94.0	95.0	95.0	95.0	95.0	95.0	95.0
≥ 2000	76.2	82.3	87.2	90.6	91.7	93.4	94.5	94.6	95.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1800	76.6	83.1	88.0	91.7	92.6	94.8	95.9	96.0	96.5	97.9	97.9	97.9	97.9	97.9	97.9
≥ 1700	76.9	83.4	88.6	92.3	93.4	95.4	96.7	96.8	97.4	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1600	77.1	83.7	88.8	92.6	93.9	95.8	97.2	97.4	98.1	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1500	77.1	83.7	88.8	92.6	93.9	95.8	97.2	97.4	98.1	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1400	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.7	99.8	99.8	99.8	99.8	99.8
≥ 1300	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.8	99.9	99.9	99.9	99.9	99.9
≥ 1200	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.8	99.9	99.9	99.9	99.9	99.9
≥ 1100	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.8	99.9	99.9	99.9	99.9	99.9
≥ 1000	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.8	99.9	99.9	99.9	99.9	99.9
≥ 900	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.8	99.9	99.9	99.9	99.9	99.9
≥ 800	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.8	99.9	99.9	99.9	99.9	99.9
≥ 700	77.1	83.7	88.8	92.8	94.1	96.0	97.3	97.6	98.3	99.8	99.9	99.9	99.9	99.9	99.9
≥ 600	77.2	83.8	88.9	92.9	94.2	96.1	97.4	97.7	98.4	99.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1129

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

49271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-72 [illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS) 1200-1700

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0			
NO CEILING		60.3	61.3	61.5	61.5	61.6	61.8	61.8	61.8	61.8	61.8	61.6	61.6	61.6	61.8	61.8
≥ 20000		69.3	70.7	71.1	71.1	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 18000		69.9	71.2	71.6	71.6	71.8	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 16000		70.1	71.3	71.9	71.9	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 14000		70.5	71.9	72.3	72.3	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 12000		71.1	72.4	72.8	72.8	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1
≥ 10000		72.9	74.3	74.6	74.6	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9
≥ 9000		73.0	74.4	74.7	74.7	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 8000		74.4	75.8	76.2	76.2	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 7000		74.9	76.4	76.7	76.7	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 6000		76.2	77.7	78.0	78.0	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 5000		77.4	78.8	79.3	79.3	79.6	79.6	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7
≥ 4500		78.2	79.7	[illegible]	80.1	80.4	80.4	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 4000		80.6	82.1	82.3	82.6	82.9	82.9	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0
≥ 3500		82.5	84.3	84.8	84.9	85.2	85.2	85.3	85.3	85.3	85.3	85.4	85.4	85.4	85.4	85.4
≥ 3000		86.2	88.2	88.9	89.1	89.4	89.5	89.6	89.6	89.7	89.7	89.7	89.8	89.8	89.9	89.9
≥ 2500		88.6	91.1	92.1	92.8	93.3	93.4	93.5	93.5	93.6	94.0	94.0	94.0	94.0	94.1	94.1
≥ 2000		88.9	91.8	93.0	93.7	94.2	94.7	94.9	95.0	95.2	95.7	95.7	96.0	96.0	96.2	96.2
≥ 1800		89.3	92.1	93.5	94.2	94.8	95.2	95.4	95.5	95.8	96.2	96.2	96.5	96.5	96.7	96.7
≥ 1500		89.7	92.6	94.3	95.1	95.8	96.2	96.4	96.5	96.9	97.5	97.5	98.1	98.1	98.3	98.3
≥ 1200		90.1	92.9	94.7	95.5	96.3	96.8	97.0	97.1	97.4	98.2	98.3	98.7	98.7	98.9	98.9
≥ 1000		90.1	93.0	94.9	95.8	96.5	97.0	97.2	97.3	97.6	98.4	98.4	98.9	98.9	99.1	99.1
≥ 900		90.1	93.0	94.8	95.6	96.5	97.0	97.2	97.3	97.6	98.4	98.5	99.0	99.0	99.2	99.2
≥ 800		90.1	93.0	94.8	95.6	96.5	97.0	97.2	97.3	97.6	98.4	98.5	99.1	99.1	99.3	99.3
≥ 700		90.1	93.0	94.9	95.6	96.5	97.0	97.2	97.3	97.6	98.4	98.5	99.1	99.1	99.3	99.3
≥ 600		90.1	93.0	94.8	95.6	96.5	97.2	97.3	97.4	97.8	98.6	98.9	99.5	99.5	99.7	99.7
≥ 500		90.1	93.0	94.8	95.6	96.5	97.2	97.3	97.4	97.8	98.8	98.9	99.7	99.7	99.9	99.9
≥ 400		90.1	93.0	94.8	95.6	96.5	97.2	97.3	97.4	97.8	98.8	98.9	99.7	99.7	99.9	99.9
≥ 300		90.1	93.0	94.8	95.6	96.5	97.2	97.3	97.4	97.8	98.8	98.9	99.7	99.7	99.9	99.9
≥ 200		90.1	93.0	94.8	95.6	96.5	97.2	97.3	97.4	97.8	98.8	98.9	99.7	99.7	99.9	99.9
≥ 100		90.1	93.0	94.8	95.6	96.5	97.2	97.3	97.4	97.8	98.8	98.9	99.7	99.7	99.9	99.9
≥ 0		90.2	93.1	94.9	95.7	96.6	97.3	97.4	97.5	97.9	98.9	99.0	99.8	99.8	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1092

USAF ETAC [illegible] 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-67 ECD

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS) 1200-2000

CEILING (HUNDREDS OF FEET)	VISIBILITY (STATUTE MILES) ≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0
UNL	61.5	62.3	62.5	63.1	63.1	63.3	63.3	63.3	63.5	63.5	63.5	63.5	63.5	63.5	63.5
≥30	65.2	66.5	66.7	67.3	67.3	67.5	67.5	67.5	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥20	65.6	66.9	67.1	67.9	68.1	68.3	68.3	68.3	68.5	68.5	68.5	68.5	68.5	68.5	68.5
≥15	66.7	67.9	68.3	69.2	69.4	69.6	69.6	69.6	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥12	67.3	68.5	69.0	69.8	70.0	70.2	70.2	70.2	70.4	70.4	70.4	70.4	70.4	70.4	70.4
≥10	67.9	69.4	69.9	70.6	70.8	71.0	71.0	71.0	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥9	69.6	71.0	71.7	72.5	72.7	73.1	73.1	73.1	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥8	70.9	72.3	72.9	73.6	74.0	74.4	74.4	74.4	74.6	74.6	74.6	74.6	74.6	74.6	74.6
≥7	72.1	73.5	74.2	75.0	75.2	75.6	75.6	75.6	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥6	72.9	74.4	75.0	75.8	76.0	76.5	76.5	76.5	76.7	76.7	76.7	76.7	76.7	76.7	76.7
≥5	74.8	76.3	76.9	77.7	77.9	78.3	78.5	78.5	79.2	79.2	79.2	79.2	79.2	79.2	79.2
≥4½	75.8	77.3	77.9	78.8	79.2	79.6	79.8	79.8	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥4	76.7	78.1	78.8	79.6	80.0	80.4	80.6	80.6	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥3½	79.0	80.8	81.5	82.3	82.7	83.1	83.3	83.3	84.0	84.0	84.0	84.0	84.0	84.0	84.0
≥3	80.4	82.7	83.5	84.4	84.8	85.2	85.4	85.4	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥2½	82.7	85.4	86.1	87.5	87.9	88.3	88.5	88.5	89.2	89.2	89.2	89.2	89.2	89.6	89.6
≥2	84.4	87.7	88.5	90.4	91.5	91.9	92.1	92.1	92.7	92.7	92.7	92.7	92.7	93.8	93.8
≥1½	84.4	87.7	89.6	92.3	93.3	93.8	94.0	94.0	95.0	95.0	95.0	95.2	95.2	96.3	96.3
≥1	84.6	87.9	89.8	92.5	93.8	94.2	94.4	94.4	95.4	95.4	95.4	95.6	95.6	96.7	96.7
≥¾	85.6	88.9	90.4	93.5	94.8	95.4	95.6	95.6	96.7	96.7	96.7	96.9	96.9	97.9	97.9
≥½	85.0	88.3	90.6	93.8	95.0	95.8	96.0	96.0	97.1	97.1	97.1	97.3	97.3	98.3	98.3
≥¼	85.0	88.3	90.6	93.8	95.0	95.8	96.0	96.0	97.3	97.3	97.3	97.5	97.5	98.5	98.5
≥0	85.0	88.3	90.6	93.8	95.0	95.8	96.0	96.0	97.3	97.3	97.3	97.5	97.5	98.5	98.5
M	85.0	88.3	90.6	93.8	95.0	95.8	96.0	96.0	97.3	97.3	97.3	97.5	97.5	98.5	98.5
0	85.0	88.3	90.8	94.0	95.2	96.3	96.5	96.5	97.7	97.9	97.9	98.1	98.1	99.2	99.2
0	85.0	88.3	90.8	94.0	95.2	96.3	96.5	96.5	97.7	97.9	97.9	98.3	98.3	99.4	99.6
0	85.0	88.3	90.8	94.0	95.2	96.3	96.5	96.5	97.7	97.9	97.9	98.3	98.3	99.4	99.6
0	85.0	88.3	90.8	94.0	95.2	96.3	96.5	96.5	97.7	97.9	97.9	98.3	98.3	99.6	100.0
0	85.0	88.3	90.8	94.0	95.2	96.3	96.5	96.5	97.7	97.9	97.9	98.3	98.3	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 480

1 DATA PROCESSING BRANCH
2 USAF ETAC
AIR WEATHER SERVICE/ MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KUNSAN/CHUCHON 52-54 JAN

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING FEET	VISIBILITY STATUTE MILES ≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	<¼
NO CEILING	61.6	63.1	63.9	64.3	64.7	64.7	65.9	65.9	65.9	65.9	65.9	66.3	66.3	66.3	66.3
≥ 20000	63.5	65.5	66.7	67.1	67.5	67.5	68.6	68.6	68.6	68.6	68.6	69.0	69.0	69.0	69.0
≥ 18000	63.5	65.5	66.7	67.1	67.5	67.5	68.6	69.0	69.0	69.0	69.0	69.0	69.4	69.4	69.4	69.4
≥ 16000	65.1	67.2	68.6	69.0	69.8	69.8	71.0	71.0	71.0	71.0	71.0	71.4	71.4	71.4	71.4
≥ 14000	65.5	67.8	69.0	69.4	70.2	70.2	71.4	71.4	71.4	71.4	71.4	71.8	71.8	71.8	71.8
≥ 12000	65.5	67.8	69.0	69.4	70.2	70.2	71.4	71.4	71.4	71.4	71.4	71.8	71.8	71.8	71.8
≥ 10000	67.1	70.2	71.8	72.5	73.3	73.3	74.5	74.5	74.5	74.5	74.5	74.9	74.9	74.9	74.9
≥ 9000	67.1	70.2	71.8	72.5	73.3	73.3	74.5	74.5	74.5	74.5	74.5	74.9	74.9	74.9	74.9
≥ 8000	68.6	71.8	73.3	74.1	74.9	74.9	76.1	76.1	76.1	76.1	76.1	76.5	76.5	76.5	76.5
≥ 7000	69.4	72.5	74.1	74.9	75.7	75.7	76.9	76.9	76.9	76.9	76.9	77.3	77.3	77.3	77.3
≥ 6000	70.2	73.3	74.9	75.7	76.5	76.5	77.6	77.6	78.0	78.0	78.0	78.4	78.4	78.4	78.4
≥ 5000	72.2	75.3	76.9	77.6	78.4	79.2	80.4	80.4	80.8	80.8	80.8	81.2	81.2	81.2	81.2
≥ 4500	74.5	77.6	79.2	80.0	80.8	81.6	82.7	82.7	83.1	83.1	83.1	83.5	83.5	83.5	83.5
≥ 4000	75.9	80.4	82.0	82.7	83.5	84.3	85.5	85.5	85.9	85.9	85.9	86.3	86.3	86.3	86.3
≥ 3500	78.4	82.0	83.5	84.3	85.1	85.9	87.1	87.1	87.5	87.5	87.5	87.8	87.8	87.8	87.8
≥ 3000	79.6	83.1	85.9	87.1	87.8	88.6	90.6	90.6	91.0	91.0	91.0	91.4	91.4	91.4	91.4
≥ 2500	80.8	84.3	87.1	88.2	89.0	89.8	91.8	91.8	92.2	92.2	92.2	92.5	92.5	92.5	92.5
≥ 2000	81.2	85.1	88.2	89.8	90.6	91.4	93.3	93.3	93.7	93.7	93.7	94.1	94.1	94.1	94.1
≥ 1800	81.2	85.1	88.2	89.8	90.6	91.4	93.3	93.3	93.7	93.7	93.7	94.1	94.1	94.1	94.1
≥ 1500	81.6	85.5	88.6	90.2	91.0	91.8	93.7	93.7	94.9	94.9	94.9	95.3	95.3	96.1	96.1
≥ 1200	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	97.3	97.3
≥ 1000	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.0	98.0
≥ 900	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.0	98.0
≥ 800	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.0	98.4
≥ 700	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.0	98.4
≥ 600	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.0	98.4
≥ 500	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.8	99.6
≥ 400	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.8	99.6
≥ 300	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.8	100.0
≥ 200	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.8	100.0
≥ 100	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.8	100.0
≥ 0	81.6	85.5	89.8	91.4	92.2	92.9	94.9	94.9	96.1	96.1	96.1	96.5	96.5	98.8	100.0

TOTAL NUMBER OF OBSERVATIONS 255

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

69271 CAMP PAGE AAF (KOREA/CHUNCHON) 52-54

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	26	25	24	23	22	27	2	21	2	2	2	2	2		
NO CEILING		56.6	60.2	60.9	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 20000		59.1	62.1	63.8	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 18000		59.1	62.1	63.8	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 16000		60.2	64.2	64.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 14000		62.0	65.9	66.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 12000		65.6	69.5	70.3	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 10000		71.0	74.9	75.6	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 9000		71.0	74.9	75.6	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 8000		72.0	76.0	76.7	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 7000		72.4	76.3	77.1	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 6000		73.5	77.4	78.1	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 5000		74.2	78.1	78.9	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3
≥ 4500		75.6	79.9	80.6	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 4000		79.2	83.5	84.2	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
≥ 3500		79.9	84.6	85.3	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7	86.7
≥ 3000		83.9	90.3	91.4	92.8	92.8	93.5	93.9	93.9	93.9	93.9	93.9	94.3	94.3	94.3	94.3
≥ 2500		85.7	92.3	93.5	95.0	95.0	95.7	96.1	96.1	96.1	96.1	96.1	96.4	96.4	96.4	96.4
≥ 2000		87.8	94.6	95.7	97.1	97.1	97.8	98.2	98.2	98.2	98.2	98.2	98.6	98.6	98.6	98.6
≥ 1800		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	98.6	98.9	98.9	98.9	98.9
≥ 1500		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.3	99.3	99.6	99.6	99.6
≥ 1200		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 1000		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 900		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 800		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 700		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 600		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 500		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 400		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 300		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 200		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 100		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0
≥ 0		88.2	95.0	96.1	97.5	97.5	98.2	98.6	98.6	98.6	98.6	99.6	99.6	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 279

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61,64-67,70-71 AR

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0500

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		55.7	61.9	63.8	64.1	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3
≥ 20000		59.6	63.6	67.2	67.8	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
≥ 18000		59.6	63.6	67.2	67.8	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
≥ 16000		60.0	63.9	67.6	68.1	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 14000		60.7	66.7	68.3	68.9	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 12000		62.0	66.0	69.6	70.6	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 10000		64.8	70.7	72.6	73.7	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 9000		64.8	70.7	72.6	73.7	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 8000		65.4	71.3	73.1	74.3	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 7000		65.9	72.2	74.1	75.2	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4
≥ 6000		67.2	73.5	75.4	76.5	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7
≥ 5000		67.8	74.3	76.1	77.2	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 4500		68.0	74.4	76.3	77.4	77.6	77.6	77.6	77.6	77.8	77.8	77.8	77.8	77.8	77.8	77.8
≥ 4000		72.6	79.3	81.3	82.6	82.8	82.8	82.8	82.8	83.0	83.0	83.0	83.0	83.0	83.0	83.0
≥ 3500		73.3	80.6	82.5	83.9	84.1	84.1	84.1	84.1	84.3	84.3	84.3	84.3	84.3	84.3	84.3
≥ 3000		75.9	83.9	86.3	87.8	88.0	88.0	88.1	88.1	88.3	88.3	88.3	88.5	88.5	88.5	88.5
≥ 2500		78.3	86.9	89.6	91.1	91.3	91.3	91.5	91.5	91.9	91.9	91.9	92.2	92.2	92.2	92.2
2200		79.4	88.3	91.5	93.1	93.3	93.5	93.7	93.7	95.2	95.4	95.4	95.7	95.7	95.7	95.7
≥ 2000		79.6	88.5	91.7	93.3	93.5	93.7	94.1	94.1	95.6	95.7	95.7	96.1	96.1	96.1	96.1
≥ 1800		79.6	88.7	91.9	93.5	93.7	93.9	94.3	94.3	95.7	96.1	96.1	96.5	96.5	96.7	96.7
≥ 1600		79.6	88.9	92.2	93.9	94.3	94.8	95.2	95.2	97.0	97.6	97.6	98.3	98.3	98.5	98.5
≥ 1400		79.6	88.9	92.2	93.9	94.3	94.8	95.2	95.2	97.0	97.8	97.8	98.5	98.5	98.7	98.7
≥ 1200		79.8	89.1	92.4	94.1	94.4	95.0	95.4	95.4	97.2	98.0	98.0	98.7	98.7	98.9	98.9
≥ 1000		79.8	89.1	92.4	94.1	94.4	95.0	95.4	95.4	97.2	98.0	98.0	98.7	98.7	98.9	98.9
≥ 900		79.8	89.1	92.4	94.1	94.4	95.0	95.4	95.4	97.2	98.0	98.0	98.7	98.7	98.9	98.9
≥ 800		79.8	89.1	92.4	94.1	94.4	95.0	95.4	95.4	97.2	98.0	98.0	98.7	98.7	98.9	98.9
≥ 700		79.8	89.1	92.4	94.1	94.4	95.0	95.4	95.4	97.2	98.0	98.0	98.7	98.7	98.9	98.9
≥ 600		79.8	89.1	92.4	94.1	94.4	95.0	95.4	95.4	97.2	98.0	98.0	98.7	98.7	98.9	98.9
≥ 500		80.0	89.3	92.8	94.4	94.8	95.4	95.7	95.7	97.8	98.5	98.5	99.3	99.3	99.4	99.4
≥ 400		80.0	89.3	92.8	94.4	94.8	95.4	95.7	95.7	97.8	98.5	98.5	99.3	99.3	99.4	99.4
≥ 300		80.0	89.3	92.8	94.4	94.8	95.4	95.7	95.7	97.8	98.5	98.5	99.3	99.3	99.6	99.6
≥ 200		80.0	89.3	92.8	94.4	94.8	95.4	95.7	95.7	97.8	98.5	98.5	99.3	99.3	99.6	99.6
≥ 100		80.0	89.3	92.8	94.4	94.8	95.4	95.7	95.7	97.8	98.5	98.5	99.3	99.3	99.6	99.8
≥ 0		80.0	89.3	92.8	94.4	94.8	95.4	95.7	95.7	97.8	98.5	98.5	99.3	99.3	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 540

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-72 AF

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2400-0800

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	26	25	24	23	22	22	21	21	2	2	2	2	25/8	2	2
NO CEILING		47.1	52.6	54.5	56.2	56.7	57.7	58.1	58.1	58.4	58.5	58.5	58.6	58.5	58.6	58.7
≥ 20000		51.7	58.3	60.5	62.5	63.1	64.3	64.7	64.8	65.2	65.3	65.3	65.5	65.5	65.7	65.7
≥ 15000		51.9	58.5	60.7	62.7	63.3	64.6	65.0	65.0	65.4	65.6	65.6	65.7	65.7	65.9	65.9
≥ 14000		51.9	58.5	60.7	62.7	63.3	64.6	65.0	65.0	65.4	65.6	65.6	65.7	65.7	65.9	65.9
≥ 13000		52.2	58.8	61.0	63.0	63.6	64.9	65.3	65.3	65.7	65.9	65.9	66.0	66.0	66.2	66.2
≥ 12000		52.7	59.3	61.6	63.6	64.3	65.5	66.0	66.0	66.4	66.6	66.6	66.7	66.7	66.9	66.9
≥ 10000		54.6	61.4	64.0	66.3	67.0	68.2	68.7	68.7	69.2	69.4	69.4	69.5	69.5	69.7	69.7
≥ 9000		54.9	61.7	64.4	66.7	67.4	68.6	69.1	69.1	69.6	69.8	69.8	69.9	69.9	70.1	70.1
≥ 8000		56.0	64.2	66.9	68.3	69.0	70.2	70.8	70.8	71.3	71.5	71.5	71.6	71.6	71.8	71.8
≥ 7000		57.0	64.3	67.1	69.5	70.2	71.4	71.9	71.9	72.5	72.6	72.6	72.8	72.8	72.9	72.9
≥ 6000		57.6	65.1	68.0	70.3	71.0	72.2	72.8	72.8	73.3	73.5	73.5	73.6	73.6	73.8	73.8
≥ 5000		59.1	66.6	69.5	71.9	72.6	73.8	74.3	74.3	74.9	75.0	75.0	75.2	75.2	75.3	75.3
≥ 4500		59.3	67.0	69.8	72.2	72.9	74.3	74.8	74.8	75.3	75.5	75.5	75.7	75.7	75.8	75.8
≥ 4000		60.7	68.5	71.5	74.0	74.8	76.1	76.7	76.7	77.3	77.4	77.4	77.6	77.6	77.8	77.8
≥ 3500		62.0	69.9	72.9	75.5	76.3	77.7	78.3	78.3	78.8	79.0	79.0	79.1	79.1	79.3	79.3
≥ 3000		65.2	73.7	77.0	79.6	80.5	82.3	82.9	82.9	83.6	83.8	83.8	84.0	84.0	84.2	84.2
≥ 2500		68.4	77.7	81.3	84.3	85.0	86.9	87.6	87.7	88.3	88.6	88.6	88.8	88.8	89.0	89.0
≥ 2000		69.7	79.3	83.3	86.6	87.4	89.3	90.2	90.3	91.2	91.8	91.8	91.9	91.9	92.2	92.2
≥ 1800		70.0	79.7	83.8	87.1	88.0	90.0	90.9	91.1	92.0	92.6	92.6	92.7	92.7	92.9	92.9
≥ 1500		70.2	80.2	84.6	88.8	89.8	91.9	93.1	93.3	94.2	94.8	94.8	95.0	95.0	95.2	95.2
≥ 1200		70.2	80.6	85.3	89.6	90.8	93.0	94.3	94.4	95.7	96.4	96.4	96.5	96.5	97.0	97.0
≥ 1000		70.2	80.8	85.4	89.9	91.2	93.5	94.7	95.0	96.3	97.0	97.1	97.2	97.2	97.7	97.7
≥ 900		70.2	80.8	85.4	89.9	91.2	93.5	94.7	95.0	96.3	97.0	97.1	97.2	97.2	97.7	97.7
≥ 800		70.2	80.8	85.4	89.9	91.2	93.5	94.7	95.0	96.3	97.1	97.1	97.3	97.3	97.8	97.8
≥ 700		70.2	80.8	85.4	89.9	91.2	93.5	94.7	95.0	96.3	97.1	97.1	97.4	97.4	97.8	97.8
≥ 600		70.2	80.8	85.4	90.0	91.2	93.6	94.8	95.0	96.4	97.2	97.3	97.7	97.7	98.1	98.1
≥ 500		70.2	80.8	85.4	90.0	91.3	93.6	94.9	95.1	96.6	97.6	97.7	98.1	98.1	98.6	98.6
≥ 400		70.2	80.8	85.4	90.0	91.3	93.7	95.0	95.2	96.7	97.7	97.8	98.2	98.2	98.8	98.8
≥ 300		70.3	80.9	85.5	90.1	91.4	93.8	95.0	95.3	96.7	97.8	97.9	98.4	98.4	99.1	99.2
≥ 200		70.3	80.9	85.5	90.1	91.4	93.8	95.0	95.3	96.7	97.8	97.8	98.4	98.4	99.1	99.2
≥ 100		70.3	80.9	85.5	90.1	91.4	93.8	95.0	95.3	96.7	97.8	97.8	98.4	98.4	99.1	99.3
0		70.3	80.9	85.5	90.1	91.4	93.8	95.0	95.3	96.7	97.8	97.8	98.4	98.4	99.1	100.0

TOTAL NUMBER OF OBSERVATIONS 1290

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,01-72 MAR

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-1100

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	0
NO CEILING		44.9	51.1	53.6	55.9	56.7	57.7	58.0	58.0	58.3	58.6	58.8	58.7	58.7	58.7
≥ 20000		56.9	58.2	61.1	63.4	64.3	65.6	66.1	66.1	66.5	66.9	66.9	67.1	67.1	67.2	67.2
≥ 18000		56.9	58.3	61.2	63.5	64.4	65.7	66.2	66.2	66.5	67.0	67.0	67.2	67.2	67.2	67.2
≥ 16000		57.1	58.4	61.4	63.7	64.5	65.8	66.3	66.3	66.7	67.2	67.2	67.3	67.3	67.4	67.4
≥ 14000		57.2	58.6	61.5	63.8	64.6	66.1	66.5	66.5	66.9	67.4	67.4	67.5	67.5	67.6	67.6
≥ 12000		57.7	59.0	62.0	64.3	65.2	66.5	67.0	67.0	67.4	67.9	67.9	68.0	68.0	68.1	68.1
≥ 10000		63.5	61.2	64.5	67.0	67.9	69.3	69.8	69.8	70.2	70.6	70.6	70.8	70.8	70.9	70.9
≥ 9000		63.8	61.6	65.1	67.6	68.7	70.1	70.6	70.6	70.9	71.4	71.4	71.6	71.6	71.6	71.6
≥ 8000		64.9	62.6	66.5	69.2	70.2	71.7	72.2	72.2	72.9	73.0	73.0	73.2	73.2	73.3	73.3
≥ 7000		65.8	63.8	67.5	70.3	71.3	72.9	73.4	73.4	73.8	74.3	74.3	74.4	74.4	74.5	74.5
≥ 6000		66.6	64.8	68.5	71.4	72.4	74.0	74.5	74.5	74.9	75.3	75.3	75.5	75.5	75.6	75.6
≥ 5000		67.0	65.3	69.1	71.9	73.0	74.5	75.0	75.0	75.4	75.9	75.9	76.0	76.0	76.1	76.1
≥ 4500		67.6	65.9	69.8	72.7	73.7	75.3	75.8	75.8	76.2	76.7	76.7	76.8	76.8	76.9	76.9
≥ 4000		69.5	68.1	72.0	75.0	76.0	77.5	78.1	78.1	78.4	78.9	78.9	79.1	79.1	79.1	79.1
≥ 3500		80.6	69.2	73.1	76.0	77.0	78.7	79.2	79.2	79.7	80.1	80.1	80.3	80.3	80.4	80.4
≥ 3000		83.8	72.7	76.9	80.1	81.1	82.9	83.5	83.5	84.0	84.5	84.5	84.8	84.8	84.9	84.9
≥ 2500		86.2	75.8	80.1	83.6	84.6	86.7	87.5	87.5	88.1	88.6	88.6	88.9	88.9	88.9	88.9
≥ 2000		88.1	78.0	82.4	86.4	87.7	89.9	90.9	90.9	91.7	92.2	92.2	92.5	92.5	92.6	92.6
≥ 1800		88.5	78.6	83.1	87.4	88.7	90.9	92.0	92.0	92.8	93.3	93.3	93.6	93.6	93.7	93.7
≥ 1500		88.9	79.0	83.7	88.3	89.8	92.2	93.4	93.5	94.7	95.2	95.3	95.7	95.7	95.7	95.7
≥ 1200		89.0	79.3	84.1	88.9	90.6	93.2	94.6	94.8	96.1	96.7	96.8	97.1	97.1	97.3	97.3
≥ 1000		89.0	79.3	84.2	89.2	91.0	93.5	95.0	95.3	96.8	97.3	97.4	97.8	97.8	98.0	98.0
≥ 900		89.0	79.3	84.2	89.2	91.0	93.7	95.1	95.5	97.0	97.5	97.6	98.1	98.1	98.2	98.2
≥ 800		89.0	79.3	84.2	89.2	91.0	93.7	95.1	95.5	97.0	97.5	97.6	98.1	98.1	98.3	98.3
≥ 700		89.0	79.3	84.2	89.2	91.0	93.7	95.1	95.5	97.0	97.7	97.8	98.5	98.5	98.6	98.6
≥ 600		89.0	79.3	84.2	89.2	91.0	93.7	95.1	95.5	97.0	97.7	97.9	98.6	98.6	98.8	98.8
≥ 500		89.0	79.3	84.2	89.2	91.0	93.7	95.2	95.6	97.1	97.9	98.1	99.0	99.0	99.1	99.1
≥ 400		89.0	79.3	84.2	89.2	91.0	93.7	95.3	95.7	97.1	98.0	98.2	99.1	99.1	99.4	99.4
≥ 300		89.0	79.3	84.2	89.2	91.0	93.7	95.3	95.7	97.1	98.0	98.2	99.2	99.2	99.5	99.5
≥ 200		89.0	79.3	84.2	89.2	91.0	93.7	95.3	95.7	97.1	98.1	98.4	99.4	99.4	99.7	99.7
≥ 100		89.0	79.3	84.2	89.2	91.0	93.7	95.3	95.7	97.1	98.1	98.4	99.4	99.4	99.7	99.8
≥ 0		89.0	79.3	84.2	89.2	91.0	93.7	95.4	95.7	97.2	98.2	98.5	99.5	99.5	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 1294

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF CHUNCHON (STATION NAME) 52-54,61-72 (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

1200-1400

CEILING (FEET)	VISIBILITY (STATUTE MILES) ≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥	≥	≥	≥	≥	≥	≥
UNLIMITED		56.3	56.7	57.0	57.1	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2
≥ 20000		65.8	66.4	66.6	66.7	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0
≥ 18000		66.1	66.6	66.9	67.0	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3
≥ 16000		66.2	66.8	67.0	67.1	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4
≥ 14000		66.7	67.3	67.5	67.6	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9
≥ 12000		67.7	68.2	68.5	68.6	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 10000		69.3	69.9	70.2	70.3	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6
≥ 9000		69.7	70.3	70.6	70.7	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 8000		71.1	71.9	72.2	72.3	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 7000		72.3	73.2	73.6	73.7	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0
≥ 6000		73.5	74.7	75.1	75.2	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 5000		74.4	75.6	76.0	76.1	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 4500		75.0	76.2	76.6	76.7	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 4000		79.0	80.2	80.6	80.7	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 3500		81.9	83.2	83.7	83.8	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2
≥ 3000		85.3	86.8	87.4	87.6	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1	88.1
≥ 2500		88.7	90.3	91.0	91.8	92.2	92.2	92.2	92.2	92.2	92.3	92.3	92.3	92.3	92.3	92.3
≥ 2000		89.9	91.8	92.6	93.7	94.4	94.5	94.7	94.8	94.8	94.9	94.9	94.9	94.9	94.9	94.9
≥ 1800		90.6	92.6	93.3	94.5	95.1	95.2	95.4	95.5	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 1500		91.7	93.6	94.4	95.5	96.2	96.4	96.6	96.7	96.8	97.0	97.0	97.1	97.1	97.1	97.1
≥ 1200		91.9	94.1	94.9	96.0	96.8	97.1	97.3	97.5	97.7	97.9	97.9	97.9	97.9	97.9	97.9
≥ 1000		91.9	94.1	94.9	96.0	96.8	97.2	97.6	97.8	98.1	98.3	98.3	98.3	98.3	98.3	98.3
≥ 900		91.9	94.1	94.9	96.3	97.1	97.5	97.9	98.0	98.3	98.5	98.5	98.6	98.6	98.6	98.6
≥ 800		92.0	94.1	95.0	96.4	97.2	97.6	98.0	98.2	98.5	98.7	98.7	98.7	98.7	98.7	98.7
≥ 700		92.0	94.1	95.0	96.4	97.2	97.6	98.0	98.2	98.6	98.7	98.7	98.8	98.8	98.8	98.8
≥ 600		92.0	94.1	95.0	96.4	97.2	97.6	98.0	98.2	98.7	98.8	98.8	98.9	99.0	99.0	99.0
≥ 500		92.0	94.1	95.0	96.4	97.3	97.7	98.1	98.3	98.7	98.9	98.9	99.0	99.2	99.2	99.2
≥ 400		92.0	94.1	95.0	96.4	97.3	97.7	98.1	98.3	98.7	99.0	99.1	99.4	99.6	99.7	99.7
≥ 300		92.0	94.1	95.0	96.4	97.3	97.7	98.1	98.3	98.7	99.0	99.1	99.4	99.7	99.8	99.8
≥ 200		92.0	94.1	95.0	96.4	97.3	97.7	98.1	98.3	98.7	99.0	99.1	99.4	99.8	99.8	99.8
≥ 100		92.0	94.1	95.0	96.4	97.3	97.7	98.1	98.3	98.7	99.0	99.2	99.5	99.9	100.0	100.0
≥ 0		92.0	94.1	95.0	96.4	97.3	97.7	98.1	98.3	98.7	99.0	99.2	99.5	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1262

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

#3271 CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-54,01-72 (YEARS) (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1700

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
[illegible]	55.4	55.7	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8	55.8
[illegible]	64.2	64.5	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6
≥ 5000	64.4	64.7	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8
≥ 4500	64.5	64.8	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
≥ 4000	64.6	64.9	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 3500	65.1	65.4	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5
≥ 3000	67.9	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 2500	68.6	68.9	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0
≥ 2000	70.2	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6
≥ 1800	71.5	71.9	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0
≥ 1600	72.3	72.7	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 1400	74.0	74.6	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9
≥ 1200	75.6	76.3	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6
≥ 1000	79.3	80.5	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 900	82.8	83.7	84.3	84.3	84.3	84.3	84.3	84.3	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 800	87.4	88.7	89.4	89.6	89.9	89.9	89.9	89.9	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 700	90.6	92.2	93.1	93.6	93.6	93.8	93.8	93.8	93.9	94.0	94.0	94.0	94.0	94.0	94.0
≥ 600	91.2	92.7	93.8	94.5	94.6	94.8	94.8	94.8	94.9	95.0	95.0	95.0	95.0	95.0	95.0
≥ 500	91.5	93.1	94.3	94.9	95.1	95.3	95.3	95.3	95.4	95.5	95.5	95.5	95.5	95.5	95.5
≥ 400	92.2	94.0	95.3	96.2	96.4	96.6	96.7	96.7	96.9	97.0	97.0	97.0	97.0	97.0	97.0
≥ 300	92.2	94.0	95.4	96.4	96.7	97.0	97.1	97.1	97.5	97.6	97.6	97.6	97.6	97.6	97.6
≥ 200	92.3	94.1	95.5	96.7	96.9	97.2	97.4	97.4	97.8	98.0	98.0	98.0	98.0	98.1	98.1
≥ 100	92.3	94.1	95.5	96.8	97.1	97.5	97.6	97.6	98.0	98.3	98.3	98.4	98.4	98.5	98.5
≥ 0	92.3	94.2	95.6	96.9	97.1	97.6	97.8	97.8	98.3	98.5	98.5	98.7	98.7	98.8	98.8
≥ 700	92.3	94.2	95.6	97.0	97.2	97.6	97.9	98.0	98.5	98.8	98.9	99.0	99.1	99.2	99.2
≥ 600	92.3	94.2	95.6	97.0	97.2	97.6	98.0	98.0	98.6	98.9	99.0	99.2	99.3	99.3	99.3
≥ 500	92.3	94.2	95.6	97.0	97.2	97.6	98.1	98.2	98.8	99.3	99.3	99.5	99.6	99.7	99.7
≥ 400	92.3	94.2	95.6	97.0	97.2	97.6	98.1	98.2	98.8	99.3	99.4	99.6	99.7	99.8	99.8
≥ 300	92.3	94.2	95.6	97.0	97.2	97.6	98.1	98.2	98.8	99.3	99.4	99.7	99.8	99.8	99.8
≥ 200	92.3	94.2	95.6	97.0	97.2	97.6	98.1	98.2	98.8	99.3	99.4	99.7	99.8	99.9	99.9
≥ 100	92.3	94.2	95.6	97.0	97.2	97.6	98.1	98.2	98.8	99.3	99.4	99.7	99.8	99.9	100.0
≥ 0	92.3	94.2	95.6	97.0	97.2	97.6	98.1	98.2	98.8	99.3	99.4	99.7	99.8	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1226

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

*3271 CAPE PAGE AAF, KOREA/CHOCHIWON 52-54, 61-67

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-2000

CEILING (FEET)	VISIBILITY: STATUTE MILES															
	≥ 3	≥ 2½	≥ 2	≥ 1¾	≥ 1½	≥ 1¼	≥ 1	≥ ¾	≥ ½	≥ ¼	≥ 0					
	54.3	55.4	58.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4
	62.2	63.4	63.1	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9
≥ 5000	62.8	64.3	64.3	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5
≥ 4500	63.0	64.7	64.7	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
≥ 4000	64.9	65.7	65.7	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 3500	64.5	66.4	66.4	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6
≥ 3000	67.2	69.1	69.3	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4
≥ 2500	67.6	69.4	69.5	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥ 2200	69.6	71.7	71.9	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 2000	71.3	73.4	73.6	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 1800	71.7	74.0	74.2	74.4	74.6	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 1500	73.1	77.4	77.6	78.0	78.2	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6
≥ 1400	77.2	79.5	79.7	80.1	80.3	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 1300	80.8	83.3	83.5	83.9	84.1	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 1200	83.7	86.1	86.3	86.9	87.1	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5
≥ 1000	86.5	89.2	89.6	90.5	90.7	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 900	89.0	91.7	92.0	93.0	93.2	93.5	93.5	93.5	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7
≥ 800	89.6	92.4	93.0	93.9	94.1	94.7	94.7	94.7	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 700	89.9	92.6	93.2	94.1	94.3	95.1	95.1	95.1	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 600	91.1	93.9	94.9	95.8	96.2	97.2	97.2	97.2	97.7	97.7	97.7	97.9	97.9	97.9	97.9	97.9
≥ 500	91.1	93.9	95.1	96.0	96.4	97.3	97.3	97.3	97.9	98.1	98.1	98.3	98.3	98.3	98.3	98.3
≥ 400	91.1	93.9	95.3	96.2	96.6	97.5	97.5	97.5	98.3	98.9	98.9	99.1	99.1	99.1	99.1	99.1
≥ 300	91.1	93.9	95.3	96.2	96.6	97.5	97.5	97.5	98.3	98.9	98.9	99.1	99.1	99.1	99.1	99.1
≥ 200	91.1	93.9	95.3	96.4	96.8	97.7	97.7	97.7	98.5	99.1	99.1	99.4	99.4	99.4	99.4	99.4
≥ 100	91.1	93.9	95.3	96.4	96.8	97.7	97.9	97.9	98.7	99.2	99.2	99.6	99.6	99.6	99.6	99.6
≥ 0	91.1	93.9	95.3	96.4	96.8	97.7	97.9	97.9	98.7	99.2	99.2	99.8	99.8	99.8	99.8	99.8
≥ 300	91.1	93.9	95.3	96.4	96.8	97.7	97.9	97.9	98.7	99.2	99.2	100.0	100.0	100.0	100.0	100.0
≥ 200	91.1	93.9	95.3	96.4	96.8	97.7	97.9	97.9	98.7	99.2	99.2	100.0	100.0	100.0	100.0	100.0
≥ 100	91.1	93.9	95.3	96.4	96.8	97.7	97.9	97.9	98.7	99.2	99.2	100.0	100.0	100.0	100.0	100.0
≥ 0	91.1	93.9	95.3	96.4	96.8	97.7	97.9	97.9	98.7	99.2	99.2	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 527

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF [illegible]/CHUCHON 22-54

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	10	9	8	7	6	5	4	3	2½	2	1½	1	½	0
≥ 12000	61.3	63.4	63.4	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8	63.8
≥ 10000	65.9	68.1	68.1	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5
≥ 9000	66.3	68.5	68.5	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8
≥ 8000	67.0	69.2	69.5	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 7000	68.1	70.3	70.6	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 6000	69.5	71.7	72.0	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4
≥ 5000	74.2	76.3	76.7	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 4500	74.2	76.3	76.7	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 4000	74.9	77.8	78.1	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 3500	75.6	78.5	78.9	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2
≥ 3000	76.7	79.6	79.9	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3
≥ 2500	79.6	82.4	82.8	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2
≥ 2000	81.7	84.6	84.9	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 1800	85.3	88.2	88.5	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9	88.9
≥ 1500	85.7	88.5	88.9	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 1000	87.5	90.3	91.0	91.4	91.4	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5
≥ 900	88.5	91.4	92.1	92.5	92.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 800	92.1	95.0	95.7	96.1	96.1	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 700	92.1	95.0	95.7	96.1	96.1	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 600	92.1	95.0	95.7	96.4	96.4	97.8	97.8	97.8	97.8	98.9	98.9	98.9	98.9	98.9	98.9
≥ 500	92.1	95.0	95.7	96.4	96.4	97.8	97.8	97.8	97.8	98.9	98.9	98.9	98.9	98.9	98.9
≥ 400	92.5	95.3	96.1	96.8	96.8	98.2	98.2	98.2	98.2	99.3	99.3	99.3	99.3	99.3	99.3
≥ 300	92.5	95.3	96.1	96.8	96.8	98.2	98.2	98.2	98.2	99.3	99.3	99.3	99.3	99.3	99.3
≥ 200	92.5	95.3	96.1	96.8	96.8	98.2	98.2	98.2	98.2	99.3	99.3	99.3	99.3	99.3	99.3
≥ 100	92.5	95.3	96.1	96.8	96.8	98.2	98.2	98.2	98.2	99.3	99.3	99.3	99.3	100.0	100.0
≥ 0	92.5	95.3	96.1	96.8	96.8	98.2	98.2	98.2	98.2	99.3	99.3	99.3	99.3	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 279

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

8271 CAMP PAGE AAF, KOREA/CHUNCHON 52-54

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-0200

VISIBILITY, STATUTE MILES

CEILING, FEET	≥10	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	<¼	≥0	≥0
UNLIM		69.8	70.3	72.9	73.6	74.6	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1
≥20000		69.1	71.0	73.6	74.7	75.1	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 15000		69.5	71.4	74.0	75.1	75.5	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6
≥ 10000		69.9	71.7	74.3	75.5	75.8	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 9000		69.9	71.7	74.3	75.5	75.8	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 8000		71.4	74.0	77.0	78.1	78.4	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 7000		72.1	74.7	77.7	78.8	79.2	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3
≥ 6000		72.9	75.5	78.4	79.6	79.9	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 5000		72.9	75.5	78.4	79.6	79.9	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 4500		73.5	76.2	79.9	81.0	81.4	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5
≥ 4000		74.7	77.3	81.4	82.5	82.9	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0
≥ 3500		75.8	78.4	82.5	83.6	84.0	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.1
≥ 3000		76.6	79.2	83.3	84.4	84.8	85.9	85.9	85.9	85.9	85.9	85.9	85.9	85.9
≥ 2500		79.2	81.8	85.9	87.3	87.4	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 2000		79.9	82.5	86.6	87.7	88.1	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 1800		82.9	85.5	89.6	90.7	91.1	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 1500		82.9	85.5	90.3	91.8	92.2	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 1000		84.4	87.0	91.8	95.2	95.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 900		84.4	87.0	91.8	95.2	95.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 800		85.9	88.8	94.1	97.8	98.1	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		85.9	88.8	94.1	97.8	98.1	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600		85.9	88.8	94.1	98.1	98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		85.9	88.8	94.1	98.1	98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		85.9	88.8	94.1	98.1	98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		85.9	88.8	94.1	98.1	98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		85.9	88.8	94.1	98.1	98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		85.9	88.8	94.1	98.1	98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		85.9	88.8	94.1	98.1	98.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 269

2

CEILING VERSUS VISIBILITY


PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

54.4	59.0	61.9	63.1	63.1	63.6	63.6	63.6	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
65.7	66.3	68.6	69.7	69.9	70.6	70.6	70.6	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
66.9	66.5	68.8	70.1	70.1	70.8	70.8	70.8	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
66.1	66.7	69.1	70.5	70.5	71.2	71.2	71.2	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6
66.7	67.2	69.7	71.0	71.0	71.8	71.8	71.8	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
67.5	68.4	70.8	72.2	72.2	72.9	72.9	72.9	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
69.1	69.9	72.3	73.7	73.7	74.4	74.4	74.4	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
70.8	71.6	74.1	75.4	75.4	76.3	76.3	76.3	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7
72.0	72.7	75.2	76.5	76.7	77.5	77.5	77.5	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8
73.1	73.9	76.7	78.0	78.2	79.0	79.0	79.0	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4
74.1	74.8	77.8	79.2	79.4	80.1	80.1	80.1	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
75.2	75.9	79.0	80.3	80.5	81.3	81.3	81.3	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
76.1	76.9	79.9	81.3	81.4	82.2	82.2	82.2	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
76.9	77.6	82.0	83.3	83.5	84.7	84.7	84.7	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0
87.5	1.4	84.5	85.8	86.0	87.1	87.1	87.1	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5
89.3	89.9	87.0	89.2	89.4	90.9	90.9	90.9	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
89.7	90.2	89.4	91.1	91.5	93.0	93.0	93.0	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4
95.6	96.0	92.4	94.1	95.1	96.6	96.6	96.6	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
96.6	96.6	92.4	94.1	95.1	96.6	96.6	96.6	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
96.7	96.8	93.0	94.7	95.8	97.2	97.2	97.2	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
96.9	97.2	93.4	95.1	96.0	97.7	97.9	97.9	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
96.9	97.2	93.4	95.1	96.0	97.7	98.1	98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
96.9	97.2	93.4	95.1	96.0	97.9	98.3	98.3	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
96.9	97.2	93.4	95.1	96.0	98.1	98.5	98.5	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
96.9	97.2	93.4	95.1	96.0	98.1	98.5	98.5	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
96.9	97.2	93.4	95.1	96.0	98.1	98.5	98.5	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
96.9	97.2	93.4	95.1	96.2	98.3	98.7	98.7	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
96.9	97.2	93.4	95.1	96.2	98.3	98.7	98.7	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
96.9	97.2	93.4	95.1	96.2	98.3	98.7	98.7	99.6	99.6	99.8	99.8	99.8	99.8	99.8	99.8
96.9	97.2	93.4	95.1	96.2	98.3	98.9	98.9	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0
96.9	97.2	93.4	95.1	96.2	98.3	98.9	98.9	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0
96.9	97.2	93.4	95.1	96.2	98.3	98.9	98.9	99.8	99.8	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 52

USAF ETAC 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AD-A088 949 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
CAMP PAGE AAF, CHUNCHON, KOREA. REVISED UNIFORM SUMMARY OF SURF--ETC(U)
MAR 74
UNCLASSIFIED USAFETAC/DS-80-075 NL

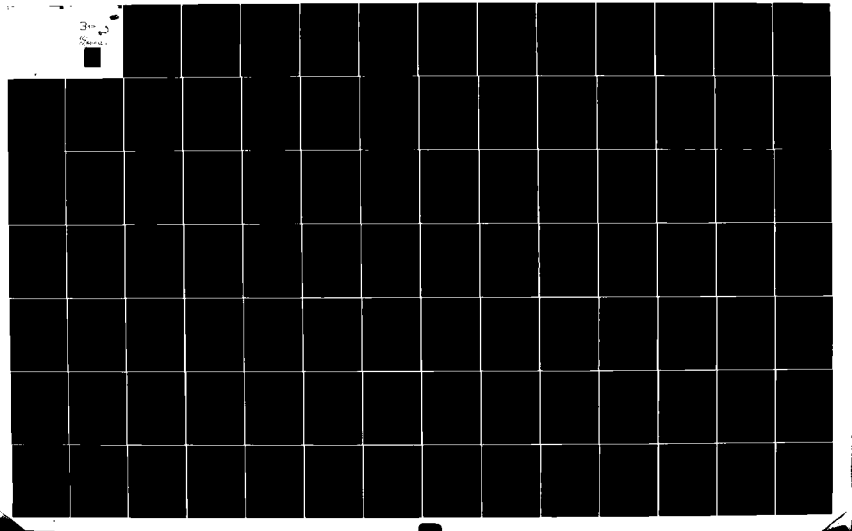

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHON 52-56,61-72 APR

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0600-0800

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	0	0	0
NO CEILING		42.1	45.9	47.6	49.9	49.9	51.3	51.5	51.5	51.8	51.8	51.8	52.0	52.0	52.0	52.0
≥ 20000		48.7	53.0	55.0	57.6	57.7	59.1	59.4	59.5	59.7	59.8	59.8	60.0	60.0	60.1	60.1
≥ 18000		48.8	53.1	55.1	57.7	57.8	59.2	59.5	59.6	59.8	59.9	59.9	60.1	60.1	60.1	60.1
≥ 16000		48.9	53.2	55.2	57.8	58.0	59.3	59.7	59.8	60.0	60.1	60.1	60.3	60.3	60.4	60.4
≥ 14000		49.4	53.9	55.8	58.5	58.6	60.0	60.4	60.5	60.7	60.8	60.8	61.0	61.0	61.1	61.1
≥ 12000		50.8	55.5	57.5	60.1	60.2	61.7	62.1	62.2	62.5	62.5	62.5	62.7	62.7	62.8	62.8
≥ 10000		53.3	58.3	60.4	63.0	63.2	64.6	65.1	65.2	65.5	65.6	65.6	65.8	65.8	65.8	65.8
≥ 9000		54.2	59.3	61.3	64.0	64.2	65.7	66.2	66.3	66.5	66.6	66.6	66.8	66.8	66.9	66.9
≥ 8000		56.5	62.0	64.2	66.9	67.0	68.6	69.1	69.2	69.4	69.5	69.5	69.7	69.7	69.8	69.8
≥ 7000		58.5	64.2	66.7	69.4	69.7	71.1	71.6	71.7	72.0	72.0	72.0	72.3	72.3	72.3	72.3
≥ 6000		58.9	64.7	67.4	70.1	70.3	71.8	72.3	72.4	72.7	72.7	72.7	73.0	73.0	73.0	73.0
≥ 5000		59.7	65.7	68.4	71.1	71.3	72.8	73.3	73.4	73.7	73.7	73.7	73.9	73.9	74.0	74.0
≥ 4500		60.2	66.3	69.2	71.9	72.0	73.6	74.1	74.2	74.4	74.5	74.5	74.7	74.7	74.8	74.8
≥ 4000		62.3	68.7	71.5	74.2	74.4	76.0	76.5	76.5	76.8	76.9	76.9	77.1	77.1	77.2	77.2
≥ 3500		64.4	71.1	74.0	76.8	77.0	78.6	79.1	79.2	79.4	79.5	79.5	79.7	79.7	79.8	79.8
≥ 3000		66.5	73.8	77.3	80.6	80.7	82.5	83.1	83.2	83.5	83.5	83.5	83.7	83.7	83.8	83.8
≥ 2500		68.3	76.3	80.1	83.8	84.1	86.1	86.7	86.8	87.1	87.2	87.2	87.4	87.4	87.5	87.5
≥ 2000		69.9	78.5	82.7	87.3	87.6	89.7	90.4	90.5	90.8	91.1	91.1	91.3	91.3	91.4	91.4
≥ 1800		70.1	78.7	83.0	87.5	87.8	89.9	90.6	90.7	91.1	91.3	91.3	91.5	91.5	91.6	91.6
≥ 1500		70.6	79.5	84.2	89.2	89.6	92.2	93.0	93.0	93.4	93.8	93.8	94.1	94.1	94.2	94.2
≥ 1200		70.8	80.0	84.7	89.8	90.4	93.2	94.2	94.2	94.6	95.1	95.1	95.4	95.4	95.4	95.4
≥ 1000		70.8	80.1	84.9	90.1	90.8	93.7	94.9	94.9	95.3	95.8	95.8	96.2	96.2	96.3	96.3
≥ 900		70.9	80.1	85.0	90.2	90.9	94.0	95.1	95.2	95.6	96.3	96.4	96.8	96.8	96.9	96.9
≥ 800		70.9	80.1	85.0	90.3	91.0	94.1	95.3	95.4	95.8	96.5	96.6	97.0	97.0	97.2	97.2
≥ 700		70.9	80.1	85.0	90.4	91.1	94.2	95.7	95.8	96.3	97.2	97.3	97.9	97.9	98.1	98.1
≥ 600		71.1	80.3	85.1	90.6	91.3	94.4	95.8	95.9	96.4	97.5	97.5	98.2	98.2	98.4	98.4
≥ 500		71.1	80.3	85.1	90.6	91.3	94.5	96.0	96.1	96.6	97.9	98.0	98.7	98.7	98.9	98.9
≥ 400		71.1	80.3	85.1	90.6	91.3	94.5	96.0	96.1	96.7	98.1	98.2	98.9	98.9	99.2	99.2
≥ 300		71.1	80.3	85.1	90.6	91.3	94.5	96.0	96.1	96.8	98.2	98.2	99.0	99.0	99.3	99.4
≥ 200		71.1	80.3	85.1	90.6	91.3	94.5	96.0	96.1	96.8	98.2	98.2	99.0	99.0	99.3	99.4
≥ 100		71.1	80.3	85.1	90.6	91.3	94.5	96.0	96.1	96.8	98.2	98.2	99.0	99.0	99.3	99.4
≥ 0		71.1	80.3	85.1	90.6	91.3	94.5	96.0	96.1	96.8	98.2	98.2	99.0	99.0	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 1420

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHUN (STATION NAME) 52-56,61-72 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-1100

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	<¼
NO CEILING		43.4	47.3	49.4	51.0	51.3	51.6	52.0	52.0	52.1	52.2	52.2	52.3	52.3	52.3	52.3
≥ 20000		51.3	56.6	58.9	60.5	60.9	61.5	61.7	61.8	61.8	61.9	61.9	62.0	62.0	62.0	62.0
≥ 18000		51.8	57.1	59.4	61.0	61.4	62.0	62.2	62.3	62.3	62.4	62.4	62.5	62.5	62.5	62.5
≥ 16000		52.0	57.3	59.6	61.3	61.6	62.3	62.5	62.5	62.6	62.7	62.7	62.8	62.8	62.8	62.8
≥ 14000		52.3	57.6	60.0	61.6	62.0	62.6	62.8	62.9	63.0	63.0	63.0	63.1	63.1	63.1	63.1
≥ 12000		53.9	59.0	61.3	63.2	63.5	64.2	64.4	64.5	64.5	64.6	64.6	64.7	64.7	64.7	64.7
≥ 10000		55.9	61.4	64.0	65.7	66.0	66.7	66.9	67.0	67.0	67.1	67.1	67.2	67.2	67.2	67.2
≥ 9000		57.1	62.6	65.3	66.9	67.3	67.9	68.1	68.2	68.3	68.3	68.3	68.4	68.4	68.4	68.4
≥ 8000		60.3	65.9	68.9	70.6	71.1	71.7	71.9	72.0	72.1	72.1	72.1	72.2	72.2	72.2	72.2
≥ 7000		62.0	67.8	70.8	72.6	73.1	73.7	73.9	74.0	74.1	74.1	74.1	74.2	74.2	74.2	74.2
≥ 6000		62.5	68.2	71.4	73.2	73.6	74.3	74.5	74.6	74.6	74.7	74.7	74.8	74.8	74.8	74.8
≥ 5000		63.8	69.5	72.8	74.6	75.0	75.6	75.8	75.9	76.0	76.1	76.1	76.1	76.1	76.1	76.1
≥ 4500		64.9	70.4	73.6	75.4	75.8	76.5	76.7	76.8	76.8	77.0	77.0	77.1	77.1	77.1	77.1
≥ 4000		66.5	72.3	75.6	77.4	77.8	78.5	78.7	78.8	78.8	79.0	79.0	79.1	79.1	79.1	79.1
≥ 3500		68.4	74.4	77.8	79.6	80.0	80.6	80.8	80.9	81.0	81.1	81.1	81.2	81.2	81.2	81.2
≥ 3000		70.9	77.3	80.8	82.9	83.3	84.1	84.3	84.3	84.5	84.6	84.6	84.7	84.7	84.7	84.7
≥ 2500		73.3	79.8	83.7	86.1	86.6	87.4	87.7	87.8	88.1	88.2	88.2	88.3	88.3	88.3	88.3
≥ 2000		75.2	82.0	86.2	89.0	89.6	90.6	90.9	90.9	91.4	91.6	91.6	91.9	91.9	91.9	91.9
≥ 1800		75.7	82.7	86.9	89.7	90.3	91.3	91.6	91.6	92.1	92.3	92.3	92.6	92.6	92.6	92.6
≥ 1500		76.3	83.7	88.3	91.4	92.1	93.3	93.6	93.6	94.1	94.4	94.4	94.7	94.7	94.7	94.7
≥ 1200		76.6	84.0	88.8	92.0	92.7	94.0	94.4	94.4	94.9	95.2	95.2	95.6	95.6	95.6	95.6
≥ 1000		76.7	84.3	89.1	92.6	93.4	94.9	95.3	95.4	95.9	96.3	96.3	96.7	96.7	96.7	96.7
≥ 900		76.7	84.3	89.2	92.7	93.5	95.1	95.4	95.5	96.1	96.4	96.4	96.9	96.9	96.9	96.9
≥ 800		76.8	84.4	89.4	93.0	93.8	95.4	95.9	95.9	96.6	97.1	97.1	97.6	97.6	97.6	97.6
≥ 700		76.8	84.4	89.5	93.1	93.9	95.6	96.2	96.3	97.1	97.6	97.6	98.1	98.1	98.1	98.1
≥ 600		76.8	84.4	89.5	93.1	93.9	95.6	96.4	96.5	97.7	98.3	98.3	98.8	98.8	98.8	98.8
≥ 500		76.8	84.4	89.6	93.4	94.2	95.9	96.9	97.0	98.5	99.3	99.3	99.8	99.8	99.8	99.8
≥ 400		76.8	84.4	89.6	93.4	94.2	95.9	96.9	97.1	98.6	99.4	99.4	99.9	99.9	99.9	99.9
≥ 300		76.8	84.4	89.6	93.4	94.2	95.9	96.9	97.1	98.6	99.4	99.4	99.9	99.9	99.9	99.9
≥ 200		76.8	84.4	89.6	93.4	94.2	95.9	96.9	97.1	98.6	99.4	99.4	99.9	99.9	99.9	99.9
≥ 100		76.8	[illegible]	89.6	93.4	94.2	95.9	96.9	97.1	98.6	99.4	99.4	99.9	99.9	99.9	99.9
≥ 0		76.8	84.4	89.6	93.4	94.2	95.9	96.9	97.1	98.6	99.4	99.4	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 1399

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KUNSAN/CHUCHUN 52-56,01-72 APR

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS) 1200-1400

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0 to ¼		
NO CEILING		50.3	50.8	51.2	51.5	51.5	51.5	51.5	51.5	51.6	51.6	51.6	51.6	51.6	51.6	51.6
≥ 20000		61.6	62.7	63.1	63.6	63.6	63.6	63.6	63.6	63.7	63.7	63.7	63.7	63.7	63.7	63.7
≥ 18000		62.0	63.1	63.5	63.9	63.9	64.0	64.0	64.0	64.1	64.1	64.1	64.1	64.1	64.1	64.1
≥ 16000		62.3	63.4	63.8	64.2	64.2	64.3	64.3	64.3	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 14000		62.9	64.0	64.4	64.9	64.9	64.9	64.9	64.9	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 12000		63.9	64.9	65.4	65.8	65.8	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 10000		66.0	67.2	67.6	68.0	68.0	68.1	68.1	68.1	68.2	68.2	68.2	68.2	68.2	68.2	68.2
≥ 9000		67.2	68.5	68.9	69.3	69.3	69.4	69.4	69.4	69.5	69.5	69.5	69.5	69.5	69.5	69.5
≥ 8000		70.5	72.1	72.7	73.1	73.1	73.2	73.2	73.2	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 7000		72.0	73.7	74.4	74.8	74.8	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	75.0	75.0
≥ 6000		72.1	73.9	74.5	75.0	75.0	75.1	75.1	75.1	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 5000		73.6	75.6	76.4	77.0	77.0	77.0	77.0	77.0	77.1	77.1	77.1	77.1	77.1	77.2	77.2
≥ 4500		74.3	76.3	77.1	77.7	77.7	77.8	77.8	77.8	77.9	77.9	77.9	77.9	77.9	78.0	78.0
≥ 4000		77.0	79.1	80.1	80.8	80.8	80.9	80.9	80.9	81.0	81.0	81.0	81.0	81.0	81.1	81.1
≥ 3500		79.3	81.6	82.6	83.4	83.4	83.6	83.6	83.6	83.7	83.7	83.7	83.7	83.7	83.8	83.8
≥ 3000		82.9	85.5	86.9	87.8	87.8	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.2	88.2
≥ 2500		85.1	87.9	89.6	90.9	90.9	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.3	91.3
≥ 2000		86.2	89.3	91.4	92.7	92.7	93.2	93.3	93.3	93.5	93.7	93.7	93.7	93.7	93.9	93.9
≥ 1800		86.8	89.9	92.0	93.4	93.4	93.9	94.0	94.0	94.4	94.5	94.5	94.6	94.6	94.7	94.7
≥ 1600		87.0	90.4	92.6	94.0	94.1	94.8	95.0	95.0	95.5	95.8	95.8	95.8	95.8	96.0	96.0
≥ 1400		87.1	90.5	92.8	94.5	94.7	95.5	95.8	95.8	96.3	96.5	96.5	96.5	96.5	96.7	96.7
≥ 1200		87.2	90.6	92.9	94.6	94.9	95.9	96.3	96.3	96.9	97.1	97.1	97.3	97.3	97.4	97.4
≥ 1000		87.2	90.6	93.0	94.8	95.2	96.3	96.7	96.7	97.3	97.6	97.6	97.9	97.9	98.1	98.1
≥ 900		87.2	90.6	93.1	95.0	95.3	96.5	96.9	96.9	97.6	98.1	98.1	98.3	98.3	98.5	98.5
≥ 800		87.2	90.6	93.1	95.0	95.5	96.8	97.3	97.4	98.1	98.6	98.6	98.8	98.8	99.0	99.0
≥ 700		87.2	90.6	93.1	95.0	95.5	97.0	97.6	97.7	98.5	98.9	98.9	99.2	99.2	99.4	99.4
≥ 600		87.2	90.6	93.1	95.1	95.6	97.0	97.7	97.9	98.9	99.4	99.4	99.6	99.6	99.8	99.8
≥ 500		87.2	90.6	93.1	95.1	95.6	97.0	97.7	97.9	99.0	99.4	99.4	99.7	99.7	99.9	99.9
≥ 400		87.2	90.6	93.1	95.1	95.6	97.0	97.7	97.9	99.1	99.5	99.5	99.8	99.8	99.9	99.9
≥ 300		87.2	90.6	93.1	95.1	95.6	97.0	97.7	97.9	99.1	99.5	99.5	99.8	99.8	99.9	99.9
≥ 200		87.2	90.6	93.1	95.1	95.6	97.0	97.7	97.9	99.1	99.5	99.5	99.8	99.8	99.9	99.9
≥ 100		87.2	90.6	93.1	95.1	95.6	97.0	97.7	97.9	99.1	99.5	99.5	99.8	99.8	99.9	99.9
≥ 0		87.3	90.7	93.2	95.2	95.7	97.1	97.8	98.0	99.1	99.6	99.6	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1389

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 52-56,61-72 YEARS | [illegible] MONTHS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1700

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥1	≥	≥	≥	≥	≥
NO CEILING		50.4	50.5	50.7	50.7	50.7	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0
≥ 20000		63.7	63.8	63.5	63.5	63.5	63.9	63.9	63.9	64.0	64.0	64.0	64.0	64.0	64.0
≥ 18000		63.0	63.7	63.9	64.0	64.0	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 16000		63.8	63.8	64.1	64.1	64.1	64.5	64.5	64.5	64.6	64.6	64.6	64.6	64.6	64.6
≥ 14000		64.7	64.7	64.9	65.0	65.0	65.4	65.4	65.4	65.5	65.5	65.5	65.5	65.5	65.5
≥ 12000		65.8	65.8	66.1	66.1	66.1	66.5	66.5	66.5	66.6	66.6	66.6	66.6	66.6	66.6
≥ 10000		67.7	67.7	68.0	68.0	68.0	68.4	68.4	68.4	68.5	68.5	68.5	68.5	68.5	68.5
≥ 9000		68.5	68.6	68.8	68.9	68.9	69.2	69.2	69.2	69.3	69.3	69.3	69.3	69.3	69.3
≥ 8000		71.1	71.2	71.5	71.6	71.6	71.9	71.9	71.9	72.0	72.0	72.0	72.0	72.0	72.0
≥ 7000		73.1	73.3	73.6	73.6	73.6	74.1	74.1	74.1	74.2	74.2	74.2	74.3	74.3	74.3
≥ 6000		74.2	74.4	74.7	74.7	74.7	75.3	75.3	75.3	75.4	75.4	75.4	75.5	75.5	75.5
≥ 5000		76.4	76.7	77.0	77.0	77.0	77.5	77.5	77.5	77.7	77.7	77.7	77.8	77.8	77.8
≥ 4500		77.2	77.5	77.9	78.0	78.0	78.6	78.6	78.6	78.7	78.7	78.7	78.8	78.8	78.8
≥ 4000		79.7	80.0	80.6	80.7	80.9	81.4	81.4	81.4	81.7	81.7	81.7	81.7	81.7	81.7
≥ 3500		82.5	82.8	83.7	83.8	83.9	84.6	84.6	84.6	84.8	84.8	84.8	84.9	84.9	84.9
≥ 3000		86.0	86.7	87.7	88.0	88.3	89.0	89.0	89.0	89.2	89.2	89.2	89.3	89.3	89.3
≥ 2500		87.5	88.4	89.5	90.0	90.3	91.0	91.0	91.0	91.2	91.2	91.2	91.3	91.3	91.3
≥ 2000		88.7	89.8	91.0	91.6	92.0	92.9	92.9	92.9	93.2	93.4	93.4	93.5	93.5	93.5
≥ 1800		89.0	90.3	91.5	92.3	92.8	93.8	93.8	93.8	94.1	94.3	94.3	94.4	94.4	94.4
≥ 1500		89.2	90.9	92.1	93.2	94.0	95.0	95.0	95.0	95.3	95.5	95.5	95.6	95.6	95.6
≥ 1200		89.3	91.0	92.6	94.1	94.9	96.1	96.2	96.2	96.5	96.8	96.8	96.9	97.0	97.0
≥ 1000		89.5	91.2	92.9	94.6	95.5	96.8	96.9	96.9	97.4	97.7	97.7	97.9	98.0	98.0
≥ 900		89.5	91.2	93.1	94.9	95.8	97.1	97.2	97.2	97.7	98.0	98.0	98.2	98.4	98.4
≥ 800		89.5	91.2	93.1	94.9	95.8	97.1	97.2	97.2	97.7	98.0	98.0	98.2	98.4	98.4
≥ 700		89.5	91.2	93.1	95.1	95.9	97.2	97.5	97.5	98.2	98.5	98.5	98.9	99.0	99.0
≥ 600		89.5	91.2	93.1	95.1	95.9	97.2	97.5	97.5	98.5	98.7	98.7	99.1	99.3	99.3
≥ 500		89.5	91.2	93.1	95.1	95.9	97.2	97.6	97.6	98.9	99.2	99.2	99.6	99.7	99.7
≥ 400		89.5	91.2	93.1	95.1	95.9	97.2	97.6	97.6	99.0	99.3	99.3	99.6	99.8	99.8
≥ 300		89.5	91.2	93.1	95.1	95.9	97.2	97.6	97.6	99.0	99.3	99.3	99.6	99.8	99.8
≥ 200		89.5	91.2	93.1	95.1	95.9	97.2	97.6	97.6	99.0	99.5	99.5	99.9	100.0	100.0
≥ 100		89.5	91.2	93.1	95.1	95.9	97.2	97.6	97.6	99.0	99.5	99.5	99.9	100.0	100.0
≥ 0		89.5	91.2	93.1	95.1	95.9	97.2	97.6	97.6	99.0	99.5	99.5	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1358

USAF ETAC FORM NO. 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 (CD-144) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-56,61-67 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1400-2000

CEILING - FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0
NO CEILING		54.3	54.7	54.7	54.7	54.7	55.4	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7
≥ 20000		64.7	65.0	65.2	65.2	65.2	65.9	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 18000		65.4	65.9	66.1	66.1	66.1	66.8	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1
≥ 16000		65.9	66.4	66.6	66.6	66.6	67.3	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 14000		67.0	67.5	67.7	67.7	67.7	68.4	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7
≥ 12000		68.9	69.4	69.6	69.6	69.6	70.3	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 10000		71.0	71.5	71.7	71.7	71.7	72.4	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8
≥ 9000		71.7	72.2	72.4	72.4	72.4	73.1	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 8000		74.0	74.5	74.7	74.7	74.7	75.4	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 7000		75.7	76.3	76.4	76.4	76.4	77.2	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5
≥ 6000		77.2	77.7	77.9	78.2	78.2	78.9	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3
≥ 5000		78.7	79.3	79.4	79.8	79.8	80.5	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 4500		79.6	80.1	80.3	80.7	80.7	81.4	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7
≥ 4000		82.4	83.0	83.1	83.5	83.5	84.2	84.5	84.5	84.5	84.5	84.5	84.5	84.5	84.5	84.5
≥ 3500		83.8	84.4	84.5	85.1	85.1	86.1	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5	86.5
≥ 3000		87.2	88.0	88.4	88.9	88.9	90.0	90.7	90.7	90.9	90.9	90.9	90.9	90.9	90.9	90.9
≥ 2500		89.1	90.0	90.5	91.0	91.0	92.1	92.8	92.8	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 2000		89.8	90.9	91.6	92.3	92.3	93.3	94.2	94.2	94.6	94.6	94.6	94.6	94.6	94.6	94.6
≥ 1800		89.8	90.9	91.6	92.3	92.3	93.3	94.2	94.2	94.6	94.6	94.6	94.6	94.6	94.6	94.6
≥ 1500		90.3	91.7	92.4	93.7	93.7	94.7	95.6	95.6	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 1200		90.3	91.9	93.0	94.6	94.6	95.8	96.8	96.8	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 1000		90.5	92.1	93.5	95.3	95.3	96.5	97.5	97.5	98.4	98.4	98.4	98.4	98.4	98.6	98.8
≥ 900		90.5	92.1	93.7	95.4	95.4	96.7	97.7	97.7	98.6	98.6	98.6	98.6	98.6	98.8	98.9
≥ 800		90.5	92.1	93.7	95.4	95.4	96.7	97.7	97.7	98.6	98.6	98.6	98.6	98.6	98.8	98.9
≥ 700		90.5	92.1	93.7	95.4	95.4	96.7	97.7	97.7	98.8	98.8	98.8	98.9	98.9	99.1	99.3
≥ 600		90.5	92.1	93.7	95.6	95.6	96.8	98.1	98.1	99.1	99.1	99.1	99.3	99.3	99.5	99.6
≥ 500		90.5	92.1	93.7	95.6	95.6	96.8	98.1	98.1	99.3	99.3	99.3	99.5	99.5	99.6	99.8
≥ 400		90.5	92.1	93.7	95.6	95.6	96.8	98.1	98.1	99.3	99.5	99.5	99.6	99.6	99.8	100.0
≥ 300		90.5	92.1	93.7	95.6	95.6	96.8	98.1	98.1	99.3	99.5	99.5	99.6	99.6	99.8	100.0
≥ 200		90.5	92.1	93.7	95.6	95.6	96.8	98.1	98.1	99.3	99.5	99.5	99.6	99.6	99.8	100.0
≥ 100		90.5	92.1	93.7	95.6	95.6	96.8	98.1	98.1	99.3	99.5	99.5	99.6	99.6	99.8	100.0
≥ 0		90.5	92.1	93.7	95.6	95.6	96.8	98.1	98.1	99.3	99.5	99.5	99.6	99.6	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 569

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-54 (YEAR) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		70.3	71.4	73.6	73.6	74.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 20000		72.1	73.6	76.6	76.6	77.7	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 18000		72.1	73.6	76.6	76.6	77.7	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8	78.8
≥ 16000		73.6	75.5	78.4	78.4	79.6	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7
≥ 14000		73.6	75.8	78.8	78.8	79.9	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 12000		74.3	76.0	80.3	80.3	81.4	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5
≥ 10000		74.7	77.0	80.7	80.7	81.8	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9
≥ 9000		74.7	77.0	80.7	80.7	82.2	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3
≥ 8000		76.2	78.4	82.2	82.2	84.4	85.5	85.5	85.5	85.5	85.5	85.5	85.5	85.5	85.5	85.5
≥ 7000		77.0	79.2	82.9	82.9	85.1	86.2	86.2	86.2	86.2	86.2	86.2	86.2	86.2	86.2	86.2
≥ 6000		79.2	81.4	85.1	85.1	87.4	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 5000		79.9	82.2	85.9	85.9	88.1	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 4500		80.7	82.9	86.6	86.6	88.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 4000		80.7	82.9	86.6	86.6	88.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 3500		81.4	83.6	87.4	87.4	89.6	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7	90.7
≥ 3000		82.2	85.9	89.6	89.6	91.8	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9
≥ 2500		83.3	87.0	90.7	91.1	93.3	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 2000		83.3	87.0	91.4	91.8	94.1	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1800		83.3	87.0	91.8	92.2	94.4	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 1500		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		85.5	89.6	94.4	95.5	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 269

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-54 (YEARS) AY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0600-0200

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		50.5	53.8	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7
≥ 20000		56.6	60.6	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 18000		57.7	61.6	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0
≥ 16000		58.4	62.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 14000		59.1	63.8	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5	69.5
≥ 12000		60.9	66.7	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8
≥ 10000		63.8	69.9	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8
≥ 9000		65.6	71.7	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 8000		67.4	73.8	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 7000		69.2	75.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
≥ 6000		73.1	80.3	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 5000		74.6	81.7	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 4500		74.6	81.7	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 4000		76.3	83.5	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8
≥ 3500		76.3	83.5	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8
≥ 3000		78.9	86.7	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 2500		79.6	87.5	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 2000		79.6	87.5	96.8	96.8	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1800		79.9	87.8	97.1	97.1	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1500		80.6	88.5	97.8	98.6	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1200		80.6	88.5	97.8	98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1000		80.6	88.5	97.8	98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 900		80.6	88.5	97.8	98.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 800		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		80.6	88.5	97.8	98.6	99.6	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 279

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-54,61,64-67,70 (YEARS) AY

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0600-0900

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥⅞	≥⅝	≥½	<½
NO CEILING		48.6	52.0	56.0	56.4	57.0	57.2	57.2	57.2	57.4	57.4	57.4	57.6	57.6	57.6	57.6
≥ 20000		55.5	59.3	64.3	64.7	65.3	65.5	65.5	65.5	65.8	65.8	65.8	66.0	66.0	66.0	66.0
≥ 18000		55.7	59.5	64.7	65.3	65.8	66.0	66.0	66.0	66.4	66.4	66.4	66.6	66.6	66.6	66.6
≥ 16000		56.4	60.3	65.5	66.0	66.6	66.8	66.8	66.8	67.2	67.2	67.2	67.4	67.4	67.4	67.4
≥ 14000		56.8	60.8	66.4	67.0	67.6	67.8	67.8	67.8	68.1	68.1	68.1	68.3	68.3	68.3	68.3
≥ 12000		58.2	62.6	68.1	68.7	69.3	69.5	69.5	69.5	69.9	69.9	69.9	70.1	70.1	70.1	70.1
≥ 10000		62.2	66.6	72.9	73.5	74.1	74.3	74.3	74.3	74.7	74.7	74.7	74.9	74.9	74.9	74.9
≥ 9000		63.3	67.9	74.3	74.9	75.4	75.6	75.6	75.6	76.0	76.0	76.0	76.2	76.2	76.2	76.2
≥ 8000		64.9	70.1	76.4	77.0	77.5	77.7	77.7	77.7	78.1	78.1	78.1	78.3	78.3	78.3	78.3
≥ 7000		65.3	70.6	77.2	77.7	78.3	78.5	78.5	78.5	78.9	78.9	78.9	79.1	79.1	79.1	79.1
≥ 6000		66.6	72.6	79.1	79.7	80.2	80.4	80.4	80.4	80.8	80.8	80.8	81.0	81.0	81.0	81.0
≥ 5000		70.2	76.2	82.9	83.5	84.1	84.3	84.3	84.3	84.6	84.6	84.6	84.8	84.8	84.8	84.8
≥ 4500		70.6	76.6	83.3	83.9	84.3	84.6	84.6	84.6	85.0	85.0	85.0	85.2	85.2	85.2	85.2
≥ 4000		74.9	81.0	87.7	88.5	89.1	89.3	89.3	89.3	89.6	89.6	89.6	89.8	89.8	89.8	89.8
≥ 3500		75.2	81.6	88.3	89.1	89.6	89.8	89.8	89.8	90.2	90.2	90.2	90.4	90.4	90.4	90.4
≥ 3000		77.7	84.3	91.0	91.7	92.3	92.5	92.5	92.5	92.9	92.9	92.9	93.1	93.1	93.1	93.1
≥ 2500		79.5	86.2	93.3	94.0	94.6	95.2	95.2	95.2	95.6	95.6	95.6	95.8	95.8	95.8	95.8
≥ 2000		81.0	87.7	94.8	95.8	96.4	97.1	97.1	97.1	97.5	97.5	97.5	97.7	97.7	97.7	97.7
≥ 1800		81.2	87.9	95.0	96.2	96.7	97.5	97.5	97.5	97.9	97.9	97.9	98.1	98.1	98.1	98.1
≥ 1500		82.0	88.7	95.8	96.9	97.5	98.3	98.3	98.3	98.7	98.7	98.7	98.8	98.8	98.8	98.8
≥ 1200		82.0	89.1	96.5	97.7	98.3	99.0	99.0	99.0	99.4	99.4	99.4	99.6	99.6	99.6	99.6
≥ 1000		82.1	89.3	96.7	97.9	98.5	99.2	99.2	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8
≥ 900		82.1	89.3	96.7	97.9	98.5	99.2	99.2	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8
≥ 800		82.1	89.3	96.7	97.9	98.5	99.2	99.2	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8
≥ 700		82.1	89.3	96.7	97.9	98.5	99.2	99.2	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8
≥ 600		82.1	89.3	96.7	97.9	98.5	99.2	99.2	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8
≥ 500		82.1	89.3	96.7	97.9	98.5	99.2	99.2	99.2	99.6	99.6	99.6	99.8	99.8	99.8	99.8
≥ 400		82.1	89.3	96.7	97.9	98.7	99.4	99.4	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0
≥ 300		82.1	89.3	96.7	97.9	98.7	99.4	99.4	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0
≥ 200		82.1	89.3	96.7	97.9	98.7	99.4	99.4	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0
≥ 100		82.1	89.3	96.7	97.9	98.7	99.4	99.4	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0
≥ 0		82.1	89.3	96.7	97.9	98.7	99.4	99.4	99.4	99.8	99.8	99.8	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 521

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-56,61-72 JAN

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0300

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥1	≥1	≥1	≥	≥5/8	≥½	≥0
NO CEILING		43.1	47.6	49.2	50.3	50.7	51.3	51.4	51.4	51.6	51.6	51.6	51.7	51.7	51.8	51.8
≥ 20000		50.0	56.4	58.7	60.4	60.7	61.4	61.5	61.6	62.0	62.0	62.0	62.3	62.3	62.4	62.4
≥ 18000		50.2	56.6	58.9	60.6	60.9	61.6	61.8	61.8	62.3	62.3	62.3	62.6	62.6	62.6	62.6
≥ 16000		50.4	56.8	59.1	60.8	61.2	61.9	62.1	62.1	62.6	62.6	62.6	62.8	62.8	62.9	62.9
≥ 14000		50.9	57.3	59.6	61.5	61.8	62.5	62.7	62.7	63.2	63.2	63.2	63.4	63.4	63.5	63.5
≥ 12000		52.9	59.8	62.4	64.3	64.6	65.4	65.6	65.6	66.1	66.1	66.1	66.3	66.3	66.4	66.4
≥ 10000		56.1	63.2	65.8	67.8	68.1	68.9	69.1	69.1	69.5	69.5	69.9	69.8	69.8	69.9	69.9
≥ 9000		56.9	64.1	66.8	68.7	69.1	69.8	70.0	70.0	70.5	70.5	70.5	70.8	70.8	70.8	70.8
≥ 8000		58.5	66.1	69.1	71.0	71.4	72.2	72.4	72.4	72.9	72.9	72.9	73.2	73.2	73.2	73.2
≥ 7000		60.4	68.4	71.3	73.4	73.7	74.6	74.9	74.9	75.4	75.4	75.4	75.8	75.8	75.8	75.8
≥ 6000		61.1	69.2	72.2	74.3	74.6	75.5	75.8	75.8	76.3	76.3	76.3	76.7	76.7	76.7	76.7
≥ 5000		62.3	70.4	73.5	75.8	76.1	77.0	77.3	77.3	77.8	77.8	77.8	78.2	78.2	78.2	78.2
≥ 4500		63.0	71.3	74.5	76.8	77.1	78.0	78.4	78.4	78.9	78.9	78.9	79.2	79.2	79.3	79.3
≥ 4000		64.4	73.0	76.4	78.6	79.0	79.9	80.2	80.2	80.7	80.7	80.7	81.0	81.0	81.1	81.1
≥ 3500		65.4	74.4	78.0	80.6	80.9	81.9	82.3	82.3	82.8	82.8	82.8	83.1	83.1	83.2	83.2
≥ 3000		67.6	76.9	80.8	83.5	83.8	84.9	85.2	85.2	85.7	85.7	85.7	86.0	86.0	86.1	86.1
≥ 2500		70.2	80.4	84.5	87.4	87.7	89.0	89.4	89.4	89.9	89.9	89.9	90.2	90.2	90.3	90.3
≥ 2000		70.9	81.5	86.0	89.1	89.5	91.0	91.4	91.4	92.0	92.0	92.0	92.3	92.3	92.4	92.4
≥ 1800		71.4	82.3	87.2	90.3	90.7	92.2	92.6	92.6	93.2	93.2	93.2	93.5	93.5	93.6	93.6
≥ 1500		71.7	82.8	87.7	90.9	91.3	93.0	93.5	93.5	94.1	94.1	94.1	94.5	94.5	94.5	94.5
≥ 1200		72.2	83.5	88.8	92.1	92.5	94.2	94.7	94.7	95.3	95.3	95.3	95.6	95.6	95.7	95.7
≥ 1000		72.3	83.6	88.9	92.3	92.8	94.6	95.1	95.1	95.8	95.8	95.8	96.1	96.1	96.2	96.2
≥ 900		72.3	83.6	88.9	92.3	92.9	94.7	95.3	95.3	96.0	96.0	96.0	96.3	96.3	96.4	96.4
≥ 800		72.3	83.6	88.9	92.3	92.9	94.8	95.4	95.4	96.0	96.0	96.0	96.4	96.4	96.4	96.4
≥ 700		72.3	83.6	89.0	92.7	93.2	95.1	95.8	95.8	96.4	96.5	96.9	96.9	96.9	96.9	96.9
≥ 600		72.3	83.6	89.0	92.8	93.4	95.5	96.4	96.4	97.1	97.1	97.1	97.5	97.5	97.5	97.5
≥ 500		72.3	83.6	89.0	93.0	93.6	95.8	96.7	96.7	97.3	97.6	97.6	98.0	98.1	98.2	98.2
≥ 400		72.3	83.6	89.0	93.0	93.6	95.8	96.7	96.7	97.3	97.7	97.7	98.2	98.2	98.3	98.4
≥ 300		72.3	83.6	89.0	93.0	93.6	95.8	96.7	96.7	97.5	98.0	98.1	98.7	98.8	98.8	98.9
≥ 200		72.3	83.6	89.0	93.0	93.6	95.8	96.7	96.7	97.5	98.2	98.2	98.8	99.1	99.2	99.2
≥ 100		72.3	83.6	89.0	93.0	93.6	95.8	96.7	96.7	97.5	98.2	98.2	98.8	99.1	99.4	99.6
≥ 0		72.3	83.6	89.0	93.0	93.6	95.8	96.7	96.7	97.5	98.2	98.2	98.8	99.2	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 1401

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KOREA/CHUCHON) 52-56,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES														
	≥7	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0
[illegible]		48.8	51.2	52.7	53.4	53.3	53.6	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7
[illegible]		57.2	60.7	62.6	63.9	64.1	64.5	64.5	64.6	64.7	64.7	64.8	64.8	64.8	64.8
≥ [illegible]		57.5	61.0	62.8	64.2	64.3	64.8	64.9	64.9	65.0	65.0	65.0	65.0	65.0	65.0
≥ 500		57.7	61.2	63.1	64.5	64.6	65.1	65.2	65.2	65.2	65.2	65.3	65.3	65.3	65.3
≥ 400		58.2	61.7	63.9	65.2	65.4	66.0	66.1	66.1	66.1	66.1	66.2	66.2	66.2	66.2
≥ 300		60.4	63.9	65.1	67.7	67.8	68.4	68.5	68.5	68.6	68.6	68.7	68.7	68.7	68.7
≥ 2000		63.6	67.0	70.1	71.8	72.1	72.7	72.8	72.8	72.8	72.8	72.9	72.9	72.9	72.9
≥ 1500		68.0	69.1	71.7	73.4	73.7	74.3	74.5	74.5	74.5	74.5	74.6	74.6	74.6	74.6
≥ 1000		67.4	71.8	74.6	76.3	76.7	77.3	77.4	77.4	77.5	77.5	77.5	77.5	77.5	77.5
≥ 900		68.7	73.1	75.9	77.7	78.0	78.6	78.9	78.9	79.0	79.0	79.1	79.1	79.1	79.1
≥ 800		69.1	73.6	76.5	78.2	78.6	79.2	79.5	79.5	79.5	79.5	79.6	79.6	79.6	79.6
≥ 700		70.0	74.6	77.5	79.3	79.6	80.2	80.5	80.5	80.6	80.6	80.6	80.6	80.6	80.6
≥ 600		70.4	74.9	77.8	79.6	79.9	80.6	80.8	80.8	80.9	80.9	81.0	81.0	81.0	81.0
≥ 500		71.9	76.5	79.8	81.7	82.0	82.6	82.9	82.9	83.0	83.0	83.0	83.0	83.0	83.0
≥ 450		73.6	78.5	81.9	83.8	84.2	84.9	85.1	85.1	85.2	85.2	85.3	85.3	85.3	85.3
≥ 400		76.4	81.5	85.0	87.3	87.6	88.3	88.5	88.6	88.6	88.6	88.7	88.7	88.7	88.7
≥ 350		78.9	84.4	88.3	90.6	91.0	91.9	92.2	92.2	92.3	92.3	92.3	92.3	92.3	92.3
≥ 300		80.2	86.0	90.2	92.7	93.2	94.4	94.7	94.7	94.8	94.8	94.9	94.9	94.9	94.9
≥ 250		80.7	86.7	91.0	93.6	94.0	95.2	95.6	95.6	95.6	95.6	95.7	95.7	95.7	95.7
≥ 200		81.3	87.4	91.8	94.5	94.9	96.2	96.5	96.5	96.6	96.6	96.6	96.6	96.6	96.6
≥ 150		81.5	87.7	92.5	95.4	96.0	97.2	97.5	97.5	97.6	97.6	97.7	97.7	97.7	97.7
≥ 100		81.5	87.8	92.6	95.6	96.2	97.5	97.8	97.8	97.9	97.9	97.9	97.9	97.9	97.9
≥ 90		81.5	88.0	92.7	95.8	96.3	97.6	97.9	97.9	98.0	98.0	98.1	98.1	98.1	98.1
≥ 80		81.7	88.0	93.0	96.0	96.6	97.9	98.2	98.2	98.3	98.3	98.4	98.4	98.4	98.4
≥ 70		81.7	88.0	93.0	96.2	96.8	98.2	98.6	98.6	98.7	98.7	98.8	98.8	98.8	98.8
≥ 60		81.7	88.0	93.0	96.3	96.9	98.4	99.0	99.0	99.2	99.2	99.3	99.3	99.3	99.3
≥ 50		81.7	88.1	93.1	96.4	96.9	98.6	99.1	99.1	99.3	99.5	99.5	99.6	99.6	99.6
≥ 40		81.7	88.1	93.1	96.4	96.9	98.6	99.1	99.1	99.3	99.6	99.7	99.7	99.7	99.7
≥ 30		81.7	88.1	93.1	96.4	96.9	98.6	99.1	99.1	99.3	99.8	99.9	99.9	99.9	99.9
≥ 20		81.7	88.1	93.1	96.4	96.9	98.6	99.1	99.1	99.3	99.8	99.9	100.0	100.0	100.0
≥ 10		81.7	88.1	93.1	96.4	96.9	98.6	99.1	99.1	99.3	99.8	99.9	100.0	100.0	100.0
≥ 0		81.7	88.1	93.1	96.4	96.9	98.6	99.1	99.1	99.3	99.8	99.9	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1461

1
2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KCKC)/CHENGCHIA [illegible] 02-50,01-72

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

1270-1421

CEILING (FEET)	VISIBILITY (MILES)															
	2 1/2	2	1 1/2	1	7/8	3/4	5/8	1/2	7/16	3/8	5/16	1/4	3/16	1/8	1/16	0
NO CEILING	53.6	54.1	54.1	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2
25000	65.5	66.1	66.7	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9
20000	66.0	66.6	67.2	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4
15000	66.1	66.7	67.4	67.5	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6
12000	67.3	68.1	68.8	68.9	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0
10000	69.7	70.5	71.3	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5
9000	72.8	74.0	74.9	75.1	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2
8000	73.5	74.9	75.9	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1
7000	75.0	77.2	78.2	78.5	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6
6500	77.2	78.8	79.9	80.2	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3	80.3
6000	78.1	79.7	80.9	81.2	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3
5000	79.1	80.9	82.0	82.4	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5
4500	80.0	81.8	83.1	83.4	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5	83.5
4000	81.8	83.6	84.9	85.2	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
3500	84.9	86.8	88.2	88.6	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7
3000	88.2	90.3	91.7	92.3	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4
2500	89.8	92.1	93.7	94.7	94.9	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0
2000	90.4	93.2	94.9	96.1	96.4	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
1800	90.7	93.5	95.3	96.5	96.8	97.3	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
1500	91.1	93.9	95.8	97.3	97.6	98.1	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
1200	91.3	94.2	96.3	97.8	98.1	98.6	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
1000	91.4	94.2	96.5	98.0	98.3	98.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
900	91.4	94.3	96.5	98.1	98.5	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
800	91.4	94.3	96.5	98.1	98.5	99.0	99.1	99.1	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
700	91.4	94.3	96.6	98.3	98.7	99.3	99.4	99.4	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
600	91.4	94.3	96.6	98.3	98.8	99.4	99.5	99.5	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8
500	91.4	94.3	96.6	98.3	98.8	99.4	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
400	91.4	94.3	96.6	98.3	98.8	99.4	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
300	91.4	94.3	96.6	98.3	98.8	99.4	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
200	91.4	94.3	96.6	98.3	98.8	99.4	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
100	91.4	94.3	96.6	98.3	98.8	99.4	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
0	91.4	94.3	96.6	98.3	98.8	99.4	99.6	99.6	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1437

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KINSHAN/CHOCHIU) 52-56,61-72 JAN

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1951-1972

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	¾	½	¼	0		
NO CEILING		54.6	54.9	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1
≥ 20000		66.0	66.4	66.8	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9
≥ 10000		66.4	66.8	67.2	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3
≥ 6000		66.9	67.2	67.6	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 5000		68.3	68.8	69.2	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 4500		69.8	70.3	70.9	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 4000		73.0	73.4	74.0	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1
≥ 3500		74.9	75.3	75.9	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0
≥ 3000		78.1	78.6	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3
≥ 2500		79.3	79.9	80.7	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 2000		80.3	80.9	81.7	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 1800		81.4	82.0	82.8	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0
≥ 1500		82.8	83.3	84.1	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 1200		85.6	86.2	86.9	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 1000		87.7	88.3	89.1	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 900		90.5	91.2	92.2	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5	92.5
≥ 800		91.8	92.9	94.0	94.5	94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 700		92.5	94.0	95.1	96.1	96.3	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 600		92.6	94.3	95.4	96.5	96.7	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 500		93.3	95.0	96.3	97.4	97.7	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 400		93.6	95.3	96.7	97.7	98.3	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 300		93.6	95.3	96.8	97.9	98.6	99.0	99.0	99.0	99.1	99.1	99.1	99.1	99.1	99.1
≥ 200		93.6	95.3	96.8	97.9	98.6	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 100		93.6	95.3	96.8	97.9	98.6	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 0		93.6	95.4	96.9	98.2	98.9	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
M		93.6	95.4	96.9	98.2	98.9	99.4	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7
		93.6	95.4	96.9	98.2	99.0	99.4	99.6	99.6	99.8	99.9	99.9	99.9	99.9	99.9
		93.6	95.4	96.9	98.2	99.0	99.4	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0
		93.6	95.4	96.9	98.2	99.0	99.4	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0
		93.6	95.4	96.9	98.2	99.0	99.4	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0
		93.6	95.4	96.9	98.2	99.0	99.4	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1403

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

94271 CHICAGO O'HARE AAP (AREA/CHICAGO) 52-56, 61-67 (AP)

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

1600-2000

CEILING FEET	VISIBILITY STATUTE MILES ≥10	≥6	≥5	≥4	≥3	≥2	≥1	≥	≥	≥	≥	≥	≥	≥	≥	≥	≥
NO CEILING		54.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5
≥ 20000		66.0	66.0	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1
≥ 18000		67.6	69.0	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2
≥ 16000		68.3	69.7	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥ 14000		70.2	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 12000		71.6	72.9	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
≥ 10000		74.3	76.0	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7
≥ 9000		77.3	79.0	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7
≥ 8000		80.7	82.8	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 7000		81.9	84.0	84.8	85.0	85.0	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 6000		82.6	84.7	85.5	85.7	85.7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 5000		84.5	86.5	87.4	87.6	87.6	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9	87.9
≥ 4500		85.3	87.4	88.2	88.4	88.4	88.8	88.8	88.8	88.8	88.8	88.8	88.8	88.8	88.8	88.8	88.8
≥ 4000		87.9	89.9	90.8	91.0	91.0	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3	91.3
≥ 3500		89.3	91.5	92.3	92.5	92.5	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 3000		90.6	92.8	93.7	93.9	94.0	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 2500		92.2	94.5	95.4	95.6	95.7	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 2000		92.3	94.7	95.7	95.9	96.1	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 1800		92.3	94.9	95.9	96.1	96.3	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1500		92.7	95.2	96.6	97.1	97.3	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1200		92.8	95.4	96.8	97.3	97.4	98.6	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1000		92.8	95.4	96.8	97.3	97.6	99.0	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 900		93.0	95.6	96.9	97.4	97.8	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 800		93.0	95.6	96.9	97.4	97.8	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 700		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		93.0	95.6	96.9	97.6	98.0	99.3	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 567

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (JRE3/CHUCH 2) 52-54 MAY

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING FEET	VISIBILITY STATUTE MILES																
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	¾	½	≥5/16	¼	0
NO CEILING		52.2	54.3	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2
≥ 20000		59.0	61.2	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 18000		59.7	61.9	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
≥ 16000		60.4	62.6	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 14000		61.5	64.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
≥ 12000		64.0	66.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 10000		66.9	70.9	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 9000		68.7	72.7	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 8000		74.5	78.4	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8
≥ 7000		74.8	78.8	84.2	84.2	84.2	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 6000		78.4	82.4	87.8	87.8	87.8	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 5000		79.9	83.8	89.2	89.2	89.2	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9	89.9
≥ 4500		80.9	84.9	90.3	90.3	90.3	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0
≥ 4000		82.7	86.7	92.4	92.4	92.4	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 3500		82.7	86.7	92.4	92.4	92.4	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
≥ 3000		83.8	88.8	94.6	94.6	94.6	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 2500		84.2	89.2	95.0	95.0	95.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 2000		84.2	89.2	95.0	95.0	95.3	96.8	96.8	96.8	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1800		84.2	89.2	95.0	95.0	95.3	96.8	96.8	96.8	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1500		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 1200		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 1000		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		84.9	89.9	95.7	95.7	96.4	97.8	97.8	97.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 278

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 51-54 (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	0
NO CEILING		48.1	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5
≥ 20000		57.7	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0
≥ 18000		57.7	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0
≥ 16000		57.7	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0	58.0
≥ 14000		61.4	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8
≥ 12000		63.9	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 10000		67.2	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6
≥ 9000		68.3	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6
≥ 8000		70.0	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 7000		70.6	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 6000		74.7	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1
≥ 5000		79.2	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 4500		79.9	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2
≥ 4000		85.3	85.7	85.7	85.7	85.7	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 3500		87.0	87.4	87.4	87.4	87.4	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7	87.7
≥ 3000		89.8	90.4	90.4	90.4	90.4	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8	90.8
≥ 2500		92.5	93.2	93.2	93.2	93.2	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 2000		94.9	95.9	95.9	95.9	95.9	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 1800		95.2	96.2	96.6	96.6	96.6	96.9	96.9	96.9	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 1500		96.2	97.3	97.6	97.6	97.6	98.0	98.0	98.0	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 1200		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.3	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1000		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.3	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 900		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.3	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 800		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 700		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 600		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		96.2	97.3	97.6	97.6	97.6	98.0	98.3	98.6	99.7	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 293

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KOREA/CHUNCHON) 51-54,61,64-67,70
STATION NAME

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0500

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	<¼
NO CEILING		35.3	37.7	38.3	38.9	39.1	39.4	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6
≥ 20000		47.2	50.2	50.9	51.5	51.7	52.5	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6
≥ 18000		47.4	50.4	50.9	51.7	51.9	52.6	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8
≥ 15000		47.7	50.8	51.3	52.1	52.3	53.0	53.2	53.2	53.2	53.2	53.2	53.2	53.2	53.2
≥ 14000		49.1	52.1	52.6	53.4	53.6	54.3	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5
≥ 12000		52.9	56.0	56.7	57.5	57.7	58.4	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6
≥ 11000		55.7	58.7	59.4	60.2	60.4	61.1	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 9000		56.4	59.4	60.2	60.9	61.1	61.9	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1
≥ 8000		59.8	62.8	63.8	64.7	64.9	65.7	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 7000		61.5	64.7	65.5	66.4	66.6	67.4	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 6000		62.6	66.0	66.8	67.7	67.9	68.7	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 5000		64.9	68.3	69.1	70.0	70.2	70.9	71.1	71.1	71.3	71.3	71.3	71.3	71.3	71.3
≥ 4500		64.9	68.3	69.1	70.0	70.2	70.9	71.1	71.1	71.3	71.3	71.3	71.3	71.3	71.3
≥ 4000		70.0	74.2	75.3	76.2	76.4	77.2	77.4	77.4	77.5	77.5	77.5	77.5	77.5	77.5
≥ 3500		72.1	76.4	77.5	78.5	78.7	79.4	79.6	79.6	79.8	79.8	79.8	79.8	79.8	79.8
≥ 3000		75.5	80.4	82.1	83.0	83.2	84.2	84.3	84.3	84.5	84.5	84.5	84.5	84.5	84.5
≥ 2500		77.0	82.3	84.2	85.1	85.3	86.2	86.4	86.4	86.6	86.8	86.8	86.8	86.8	86.8
≥ 2000		80.0	86.0	89.2	90.4	90.8	91.7	91.9	91.9	92.1	92.3	92.3	92.3	92.3	92.3
≥ 1800		81.1	87.2	90.4	91.5	91.9	92.8	93.0	93.0	93.2	93.4	93.4	93.4	93.4	93.4
≥ 1500		82.1	88.9	92.1	93.6	94.0	95.1	95.5	95.5	95.7	95.8	95.8	95.8	95.8	95.8
≥ 1200		82.6	89.8	93.0	94.7	95.1	96.4	96.8	96.8	97.0	97.2	97.2	97.2	97.2	97.2
≥ 1000		82.8	90.2	93.6	95.3	95.7	97.0	97.5	97.5	97.7	97.9	97.9	97.9	97.9	97.9
≥ 900		82.8	90.2	93.6	95.3	95.7	97.0	97.5	97.5	97.7	97.9	97.9	97.9	97.9	97.9
≥ 800		82.8	90.2	93.6	95.5	95.8	97.4	98.1	98.3	98.5	98.9	98.9	98.9	98.9	98.9
≥ 700		82.8	90.2	93.6	95.5	95.8	97.4	98.1	98.3	98.5	98.9	98.9	98.9	98.9	98.9
≥ 600		82.8	90.4	93.8	95.8	96.2	97.9	98.7	98.9	99.1	99.4	99.4	99.4	99.4	99.4
≥ 500		83.0	90.6	94.0	96.2	96.8	98.5	99.2	99.4	99.6	100.0	100.0	100.0	100.0	100.0
≥ 400		83.0	90.6	94.0	96.2	96.8	98.5	99.2	99.4	99.6	100.0	100.0	100.0	100.0	100.0
≥ 300		83.0	90.6	94.0	96.2	96.8	98.5	99.2	99.4	99.6	100.0	100.0	100.0	100.0	100.0
≥ 200		83.0	90.6	94.0	96.2	96.8	98.5	99.2	99.4	99.6	100.0	100.0	100.0	100.0	100.0
≥ 100		83.0	90.6	94.0	96.2	96.8	98.5	99.2	99.4	99.6	100.0	100.0	100.0	100.0	100.0
≥ 0		83.0	90.6	94.0	96.2	96.8	98.5	99.2	99.4	99.6	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 530

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHUN 51-56,01-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0800

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥⅛	≥0
NO CEILING		29.9	32.7	33.2	35.0	35.6	36.0	36.1	36.1	36.3	36.5	36.5	36.5	36.5	36.5
≥ 20000		38.7	42.7	43.7	45.9	46.3	47.2	47.3	47.3	47.5	47.7	47.7	47.7	47.7	47.8
≥ 18000		39.1	43.1	44.1	46.4	47.2	47.6	47.7	47.7	47.9	48.1	48.1	48.1	48.1	48.2
≥ 16000		39.5	43.5	44.4	46.7	47.5	47.9	48.1	48.1	48.3	48.5	48.5	48.5	48.5	48.6
≥ 14000		40.3	44.4	45.4	47.7	48.5	48.9	49.0	49.0	49.2	49.5	49.5	49.5	49.5	49.5
≥ 12000		42.5	46.7	47.8	50.1	50.9	51.3	51.4	51.4	51.6	51.9	51.9	51.9	51.9	51.9
≥ 11000		46.4	51.0	52.1	54.5	55.4	56.0	56.3	56.3	56.5	56.7	56.7	56.7	56.7	56.7
≥ 9000		47.3	52.2	53.3	55.7	56.6	57.3	57.5	57.5	57.7	57.9	57.9	57.9	58.0	58.0
≥ 8000		50.1	55.6	56.9	59.5	60.4	61.1	61.3	61.3	61.5	61.7	61.7	61.7	61.8	61.8
≥ 7000		52.2	58.0	59.3	62.2	63.2	63.9	64.1	64.1	64.4	64.6	64.6	64.6	64.6	64.6
≥ 6000		52.4	58.2	59.5	62.5	63.5	64.3	64.5	64.5	64.7	64.9	64.9	64.9	65.0	65.0
≥ 5000		53.1	58.9	60.2	63.2	64.2	65.0	65.2	65.2	65.4	65.6	65.6	65.6	65.7	65.7
≥ 4500		53.6	59.3	60.6	63.7	64.7	65.5	65.7	65.7	65.9	66.1	66.1	66.1	66.1	66.1
≥ 4000		55.5	61.5	62.8	65.9	67.0	67.7	67.9	67.9	68.1	68.3	68.3	68.3	68.4	68.4
≥ 3500		57.0	63.2	64.5	67.7	68.8	69.5	69.7	69.7	69.9	70.1	70.1	70.1	70.2	70.2
≥ 3000		61.4	67.9	69.4	72.8	73.9	74.7	74.9	74.9	75.1	75.3	75.3	75.4	75.4	75.5
≥ 2500		64.0	71.0	73.0	76.6	77.7	78.4	78.7	78.7	78.9	79.1	79.1	79.2	79.2	79.3
≥ 2000		66.8	74.5	76.8	80.7	82.1	82.9	83.6	83.6	83.8	84.1	84.1	84.2	84.2	84.3
≥ 1800		68.1	76.3	78.6	82.7	84.1	84.9	85.6	85.6	85.9	86.2	86.2	86.3	86.3	86.3
≥ 1500		69.4	78.1	80.9	85.5	86.9	87.8	88.6	88.6	89.0	89.4	89.4	89.4	89.4	89.5
≥ 1200		70.6	79.5	82.7	87.5	88.9	90.1	90.9	90.9	91.3	91.7	91.7	91.8	91.8	91.8
≥ 1000		70.9	79.9	83.1	88.3	89.7	90.9	92.0	92.0	92.4	92.8	92.8	92.9	92.9	92.9
≥ 900		71.2	80.1	83.4	88.7	90.1	91.3	92.4	92.4	93.1	93.4	93.4	93.5	93.5	93.5
≥ 800		71.5	80.6	83.9	89.4	90.9	92.5	93.6	93.8	94.5	94.8	94.8	94.9	94.9	95.0
≥ 700		71.6	80.9	84.5	90.0	91.7	93.3	94.4	94.6	95.5	95.8	95.8	95.9	95.9	95.9
≥ 600		71.7	81.0	84.8	90.4	92.2	94.1	95.2	95.3	96.3	96.8	96.8	96.8	96.8	96.9
≥ 500		71.8	81.0	85.0	90.7	92.9	94.7	96.0	96.2	97.3	97.9	97.9	98.0	98.0	98.1
≥ 400		71.8	81.0	85.1	91.0	93.1	95.1	96.6	96.7	97.9	98.6	98.6	99.0	99.0	99.0
≥ 300		71.8	81.0	85.1	91.0	93.1	95.1	96.7	96.8	98.0	98.9	99.0	99.5	99.5	99.5
≥ 200		71.8	81.0	85.1	91.0	93.1	95.1	96.8	96.9	98.1	99.0	99.1	99.7	99.7	99.7
≥ 100		71.8	81.0	85.1	91.0	93.1	95.1	96.8	96.9	98.1	99.0	99.1	99.8	99.8	99.9
≥ 0		71.8	81.0	85.1	91.0	93.1	95.1	96.8	96.9	98.1	99.0	99.1	99.8	99.8	99.9

TOTAL NUMBER OF OBSERVATIONS 1456

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AMF KUREA/CHUNCHON 51-56,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-1100

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0
NO CEILING		36.6	38.4	39.0	39.4	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6
≥ 20000		46.4	48.7	49.4	50.0	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2
≥ 18000		47.3	49.6	50.3	50.9	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1
≥ 16000		47.5	49.8	50.4	51.0	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 14000		48.7	50.9	51.6	52.2	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4
≥ 12000		50.5	52.9	53.6	54.1	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3
≥ 10000		54.3	56.7	57.6	58.1	58.4	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5
≥ 9000		55.1	57.6	58.5	59.0	59.3	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4	59.4
≥ 8000		58.8	61.7	62.7	63.3	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6
≥ 7000		61.2	64.1	65.1	65.8	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1
≥ 6000		61.7	64.7	65.7	66.4	66.7	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 5000		62.5	65.6	66.8	67.4	67.7	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8
≥ 4500		63.4	66.4	67.6	68.3	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6
≥ 4000		65.4	68.4	69.6	70.3	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6
≥ 3500		67.9	71.1	72.3	73.0	73.3	73.3	73.4	73.4	73.4	73.5	73.5	73.5	73.5	73.5
≥ 3000		72.3	76.1	77.5	78.2	78.9	79.1	79.1	79.1	79.3	79.3	79.3	79.3	79.3	79.3
≥ 2500		77.3	81.4	83.3	84.3	84.7	84.9	84.9	84.9	85.2	85.3	85.3	85.3	85.3	85.3
≥ 2000		80.4	85.4	87.6	88.7	89.4	89.5	89.6	89.6	89.8	89.9	89.9	89.9	89.9	89.9
≥ 1800		81.1	86.2	88.4	89.6	90.3	90.4	90.5	90.5	90.7	90.8	90.8	90.8	90.8	90.8
≥ 1500		82.7	87.8	90.5	91.9	92.6	92.7	92.8	92.8	93.2	93.3	93.3	93.3	93.3	93.3
≥ 1200		83.6	88.9	91.9	93.4	94.2	94.4	94.5	94.5	94.9	95.0	95.0	95.0	95.0	95.0
≥ 1000		84.0	89.5	92.7	94.3	95.2	96.0	96.1	96.1	96.5	96.6	96.6	96.6	96.6	96.6
≥ 900		84.2	89.7	93.0	94.7	95.7	96.5	96.8	96.8	97.2	97.2	97.2	97.2	97.2	97.2
≥ 800		84.3	90.0	93.4	95.3	96.3	97.3	97.7	97.7	98.2	98.3	98.3	98.3	98.3	98.3
≥ 700		84.3	90.0	93.6	95.6	96.6	97.7	98.1	98.1	98.9	99.0	99.0	99.0	99.0	99.0
≥ 600		84.4	90.0	93.6	95.9	96.9	98.0	98.4	98.4	99.2	99.3	99.3	99.4	99.4	99.4
≥ 500		84.4	90.0	93.6	95.9	97.0	98.1	98.6	98.6	99.6	99.7	99.7	99.8	99.8	99.8
≥ 400		84.4	90.0	93.7	96.0	97.0	98.1	98.7	98.8	99.7	99.9	99.9	99.9	99.9	99.9
≥ 300		84.4	90.0	93.7	96.0	97.0	98.1	98.7	98.8	99.7	99.9	99.9	100.0	100.0	100.0
≥ 200		84.4	90.0	93.7	96.0	97.0	98.1	98.7	98.8	99.7	99.9	99.9	100.0	100.0	100.0
≥ 100		84.4	90.0	93.7	96.0	97.0	98.1	98.7	98.8	99.7	99.9	99.9	100.0	100.0	100.0
≥ 0		84.4	90.0	93.7	96.0	97.0	98.1	98.7	98.8	99.7	99.9	99.9	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1447

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-56,61-72

1200-1400

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥ 7	≥ 6	≥ 5	≥ 4	≥ 3	≥ 2½	≥ 2	≥ 1½	≥ 1	≥ ¾	≥ ½	≥ ¼	≥ 0	≥ ½	≥ ¼	≥ 0
NO CEILING	41.7	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1
≥ 20000	53.1	53.4	53.5	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6
≥ 18000	54.0	54.4	54.4	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5
≥ 16000	54.5	54.9	54.9	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0
≥ 14000	56.2	56.5	56.6	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7
≥ 12000	58.0	58.4	58.4	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5
≥ 10000	61.0	61.3	61.4	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5	61.5
≥ 9000	62.3	62.7	62.8	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9
≥ 8000	65.8	66.3	66.5	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6
≥ 7000	67.6	68.1	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 6000	68.1	68.7	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 5000	69.9	70.5	70.9	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 4500	70.6	71.2	71.6	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8
≥ 4000	74.3	75.0	75.3	75.6	75.6	75.6	75.6	75.6	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 3500	79.3	80.1	80.5	80.7	80.7	80.7	80.7	80.7	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 3000	84.7	85.5	86.0	86.6	86.6	86.6	86.7	86.7	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 2500	88.8	89.9	90.5	91.1	91.1	91.1	91.2	91.2	91.4	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 2400	90.5	92.1	93.0	93.6	93.6	93.7	93.7	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 2200	90.8	92.3	93.2	94.0	94.0	94.2	94.2	94.2	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 2000	91.8	93.5	94.6	95.5	95.6	95.7	95.8	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1800	92.5	94.4	95.5	96.6	96.8	96.9	97.0	97.0	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 1600	92.7	94.5	95.7	97.1	97.4	97.9	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 1400	92.7	94.5	95.9	97.3	97.5	98.0	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1200	92.7	94.5	95.9	97.3	97.7	98.3	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1000	92.7	94.7	96.1	97.5	98.0	98.7	98.9	98.9	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 900	92.7	94.7	96.1	97.5	98.0	98.7	99.0	99.1	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 800	92.7	94.7	96.1	97.5	98.0	98.8	99.1	99.2	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 700	92.8	94.8	96.1	97.6	98.2	99.0	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600	92.8	94.8	96.1	97.6	98.2	99.0	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500	92.8	94.8	96.1	97.6	98.2	99.0	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
< 500	92.8	94.8	96.1	97.6	98.2	99.0	99.3	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1422

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-56,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1100-1700

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	>6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	0
NO CEILING		40.8	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1
≥ 20000		54.0	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1
≥ 18000		54.7	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.9	54.9
≥ 16000		55.2	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3
≥ 14000		56.1	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2
≥ 12000		58.2	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3
≥ 10000		61.2	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4	61.4
≥ 9000		62.2	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4	62.4
≥ 8000		66.7	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1
≥ 7000		68.5	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0	69.0
≥ 6000		69.3	69.8	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 5000		71.0	71.5	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 4500		72.5	73.1	73.3	73.6	73.6	73.6	73.6	73.6	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 4000		76.7	77.5	77.8	78.0	78.0	78.0	78.0	78.0	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 3500		82.5	83.3	83.9	84.0	84.0	84.0	84.0	84.0	84.1	84.1	84.1	84.1	84.1	84.1	84.1
≥ 3000		87.2	88.3	88.7	89.1	89.1	89.1	89.1	89.1	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 2500		90.3	91.8	92.4	92.8	92.8	92.9	92.9	92.9	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 2000		91.6	93.7	94.4	94.9	94.9	95.1	95.1	95.1	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 1800		92.0	94.1	94.8	95.6	95.6	95.9	95.9	95.9	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1500		92.8	95.1	95.8	96.8	96.8	97.2	97.2	97.2	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 1200		93.2	95.6	96.3	97.5	97.5	98.0	98.0	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1000		93.7	96.3	97.1	98.3	98.3	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 900		93.7	96.3	97.1	98.3	98.3	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 800		93.7	96.3	97.1	98.3	98.3	99.0	99.1	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 700		93.8	96.4	97.1	98.4	98.4	99.1	99.2	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 600		93.8	96.4	97.1	98.4	98.4	99.1	99.5	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 500		93.9	96.5	97.3	98.6	98.6	99.3	99.6	99.6	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		93.9	96.5	97.3	98.6	98.6	99.3	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		93.9	96.5	97.3	98.6	98.6	99.3	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		93.9	96.5	97.3	98.6	98.6	99.3	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		93.9	96.5	97.3	98.6	98.6	99.3	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		93.9	96.5	97.3	98.6	98.6	99.3	99.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1398

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF NR REG/CHUCHUN 51-56,61-67

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1500-2000

CEILING (FEET)	VISIBILITY (STATUTE MILES)																
	≥7	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥0			
NO CEILING		44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6
≥ 20000		59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 15000		59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9	59.9
≥ 12000		61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1
≥ 10000		62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6
≥ 9000		64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1
≥ 8000		66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7
≥ 7000		68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
≥ 6000		71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 5000		72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4
≥ 4500		74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 4000		76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 3500		78.8	78.8	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0
≥ 3000		83.5	83.7	83.8	84.0	84.0	84.0	84.0	84.0	84.0	84.2	84.2	84.2	84.2	84.2	84.2	84.2
≥ 2500		86.7	86.9	87.0	87.2	87.2	87.4	87.4	87.4	87.4	87.5	87.5	87.5	87.5	87.5	87.5	87.5
≥ 2000		91.2	92.1	92.6	92.8	92.8	92.9	92.9	92.9	93.1	93.1	93.1	93.1	93.1	93.1	93.1	93.1
≥ 1800		93.3	94.1	94.6	94.8	94.8	94.9	94.9	94.9	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1600		94.1	95.5	96.3	96.5	96.6	97.0	97.0	97.0	97.1	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 1400		94.4	95.8	96.6	97.0	97.1	97.5	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 1200		94.6	96.1	97.0	97.3	97.5	98.0	98.0	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1000		95.1	96.6	97.8	98.1	98.3	99.0	99.0	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 900		95.1	96.8	98.0	98.5	98.7	99.3	99.3	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 800		95.1	96.8	98.0	98.5	98.7	99.3	99.3	99.3	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 700		95.3	97.0	98.1	98.7	98.8	99.5	99.5	99.5	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 600		95.3	97.0	98.1	98.7	98.8	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		95.3	97.0	98.1	98.7	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		95.3	97.0	98.1	98.7	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		95.3	97.0	98.1	98.7	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		95.3	97.0	98.1	98.7	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		95.3	97.0	98.1	98.7	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		95.3	97.0	98.1	98.7	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 594

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 (STATION NO.) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-54 (YEAR)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0
NO CEILING		52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2
≥ 20000		57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7	57.7
≥ 18000		58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1
≥ 16000		59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8
≥ 14000		61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9	61.9
≥ 12000		63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9	63.9
≥ 10000		64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
≥ 9000		64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
≥ 8000		70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
≥ 7000		70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8	70.8
≥ 6000		73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 5000		78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 4500		80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 4000		83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8
≥ 3500		87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3	87.3
≥ 3000		94.5	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 2500		95.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 2000		95.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1800		96.2	97.3	97.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1500		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1200		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1000		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 900		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 800		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 700		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 600		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 500		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.7	100.0	100.0	100.0	100.0	100.0
≥ 400		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.7	100.0	100.0	100.0	100.0	100.0
≥ 300		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.7	100.0	100.0	100.0	100.0	100.0
≥ 200		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.7	100.0	100.0	100.0	100.0	100.0
≥ 100		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.7	100.0	100.0	100.0	100.0	100.0
≥ 0		96.9	97.9	97.9	99.0	99.0	99.0	99.0	99.0	99.7	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 291

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

47271 CAMP PAGE AAF KOREA/CHUNCHEON 51-54

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

0000-0200

CEILING FEET	VISIBILITY STATUTE MILES																
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	¾	½	¼	⅛	⅛	0
	37.9	39.8	40.1	40.1	40.1	40.1	40.1	40.1	40.1	40.1	40.1	40.1	40.1	40.1	40.1	40.1
≥ [illegible]	42.2	44.4	44.6	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9	44.9
≥ 1800	43.0	45.2	45.4	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7
≥ 1500	43.8	46.0	46.2	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5
≥ 1200	44.4	46.5	46.9	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0
≥ 1000	46.0	48.1	48.4	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7
≥ 900	48.9	51.1	51.3	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6
≥ 800	48.9	51.1	51.3	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6
≥ 700	49.7	51.9	52.2	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4
≥ 600	50.8	53.0	53.2	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5
≥ 500	51.6	53.8	54.0	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3	54.3
≥ 450	54.9	56.7	57.0	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3
≥ 400	55.6	58.1	58.6	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9
≥ 350	62.1	65.1	65.6	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 300	65.6	69.1	69.6	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 250	72.3	76.3	77.4	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 200	75.4	81.7	83.3	84.4	84.4	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
≥ 150	80.1	85.8	87.9	89.0	89.0	90.1	90.1	90.1	90.6	90.6	90.6	90.9	90.9	90.9	90.9	90.9
≥ 100	82.3	87.9	90.1	91.1	91.1	92.2	92.2	92.2	92.7	92.7	92.7	93.0	93.0	93.0	93.0	93.0
≥ 150	83.6	89.5	92.2	93.8	93.8	95.2	95.2	95.2	96.0	96.0	96.0	96.2	96.2	96.2	96.2	96.2
≥ 120	84.1	90.3	93.3	94.9	94.9	96.2	96.2	96.2	97.0	97.0	97.0	97.3	97.3	97.3	97.3	97.3
≥ 100	84.1	90.9	93.8	95.4	95.4	96.8	96.8	96.8	97.8	97.8	97.8	98.1	98.1	98.1	98.1	98.1
≥ 90	84.1	90.9	93.8	95.4	95.4	96.8	96.8	96.8	97.8	97.8	97.8	98.1	98.1	98.1	98.1	98.1
≥ 80	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.7	98.7	98.7	98.9	98.9	98.9	98.9	98.9
≥ 70	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.7	98.7	98.7	98.9	98.9	98.9	98.9	98.9
≥ 60	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.9	98.9	98.9	99.5	99.5	99.5	99.5	99.5
≥ 50	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.9	98.9	98.9	100.0	100.0	100.0	100.0	100.0
≥ 40	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.9	98.9	98.9	100.0	100.0	100.0	100.0	100.0
≥ 30	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.9	98.9	98.9	100.0	100.0	100.0	100.0	100.0
≥ 20	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.9	98.9	98.9	100.0	100.0	100.0	100.0	100.0
≥ 10	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.9	98.9	98.9	100.0	100.0	100.0	100.0	100.0
≥ [illegible]	84.1	90.9	93.8	95.4	95.4	97.6	97.6	97.6	98.9	98.9	98.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 372

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-54,61,64-67,70 JUL

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS 0300-0500

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥ 27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12
NO CEILING		22.0	23.7	25.0	26.3	26.4	26.4	26.6	26.6	26.6	26.6	26.6	26.6	26.6	26.6	26.6
≥ 20000		25.0	27.2	28.7	30.8	31.2	31.0	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2
≥ 8000		25.0	27.2	28.7	30.8	31.2	31.0	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2
≥ 5000		25.0	27.2	28.7	30.8	31.2	31.0	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2	31.2
≥ 4000		25.4	28.1	29.5	31.6	31.8	31.8	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
≥ 3000		27.1	29.7	31.2	33.3	33.4	33.4	33.6	33.6	33.6	33.6	33.6	33.6	33.6	33.6	33.6
≥ 2500		29.4	32.0	33.6	35.7	35.9	35.9	36.1	36.1	36.1	36.1	36.1	36.1	36.1	36.1	36.1
≥ 2000		30.0	32.6	34.3	36.4	36.5	36.5	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7	36.7
≥ 1800		31.8	34.4	36.1	38.3	38.5	38.5	38.8	38.8	38.8	38.8	38.8	38.8	38.8	38.8	38.8
≥ 1500		32.3	34.9	36.5	38.6	39.0	39.0	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3	39.3
≥ 1200		32.8	35.6	37.2	39.5	39.6	39.6	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0
≥ 1000		34.7	37.8	39.5	41.9	42.1	42.1	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4
≥ 900		35.2	38.3	40.1	42.6	42.7	42.7	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1
≥ 800		39.2	43.1	45.0	47.6	47.8	48.0	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3
≥ 700		43.4	47.5	49.8	52.4	52.5	52.7	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0
≥ 600		52.5	59.7	63.3	65.9	66.2	66.4	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9
≥ 500		57.1	65.6	70.1	73.4	73.7	74.2	74.7	74.7	74.9	74.9	74.9	74.9	74.9	74.9	74.9
≥ 400		61.8	72.9	78.8	83.0	83.5	84.8	85.5	85.5	85.8	85.8	85.8	86.3	86.5	86.5	86.5
≥ 300		62.8	74.1	80.1	84.3	84.8	86.3	86.9	86.9	87.4	87.4	87.4	87.9	88.1	88.1	88.1
≥ 200		64.6	77.2	84.0	88.9	89.6	92.0	93.0	93.0	93.5	93.5	93.5	94.0	94.1	94.1	94.1
≥ 150		65.6	78.3	85.2	90.7	91.5	94.3	95.4	95.4	96.1	96.1	96.1	96.6	96.7	96.7	96.7
≥ 100		65.6	78.3	85.3	91.0	92.0	94.8	95.9	95.9	96.7	96.7	96.7	97.4	97.6	97.6	97.6
≥ 70		65.6	78.3	85.3	91.2	92.2	95.3	96.4	96.4	97.2	97.2	97.2	97.9	98.0	98.2	98.2
≥ 50		65.6	78.3	85.3	91.2	92.2	95.3	96.4	96.4	97.4	97.4	97.4	98.0	98.2	98.4	98.4
≥ 30		65.6	78.3	85.3	91.2	92.2	95.3	96.4	96.4	97.4	97.4	97.4	98.0	98.2	98.4	98.4
≥ 20		65.6	78.3	85.3	91.2	92.2	95.3	96.4	96.4	97.4	97.4	97.4	98.2	98.4	98.5	98.5
≥ 15		65.6	78.5	85.5	91.4	92.3	95.6	96.7	96.7	98.0	98.0	98.0	98.9	99.0	99.2	99.2
≥ 10		65.6	78.5	85.5	91.4	92.3	95.8	96.9	96.9	98.2	98.4	98.4	99.2	99.3	99.5	99.5
≥ 7		65.6	78.5	85.5	91.4	92.3	95.8	96.9	96.9	98.2	98.5	98.7	99.5	99.7	99.8	99.8
≥ 5		65.6	78.5	85.5	91.4	92.3	95.8	97.1	97.1	98.4	98.7	98.9	99.7	99.8	100.0	100.0
≥ 4		65.6	78.5	85.5	91.4	92.3	95.8	97.1	97.1	98.4	98.7	98.9	99.7	99.8	100.0	100.0
≥ 0		65.6	78.5	85.5	91.4	92.3	95.8	97.1	97.1	98.4	98.7	98.9	99.7	99.8	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 613

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AGF KOREA/CHUCHON 51-54,56,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥0
		11.9	13.0	14.3	14.8	14.8	15.1	15.3	15.3	15.5	15.6	15.6	15.7	15.7	15.8	16.0
≥ 20000		15.4	17.6	18.9	20.3	20.4	20.8	20.9	20.9	21.2	21.4	21.4	21.5	21.5	21.6	21.7
≥ 18000		15.4	17.6	18.9	20.3	20.4	20.8	21.0	21.0	21.3	21.5	21.5	21.5	21.5	21.7	21.8
≥ 17000		15.4	17.6	18.9	20.3	20.4	20.8	21.0	21.0	21.3	21.5	21.5	21.5	21.5	21.7	21.8
≥ 14000		15.9	18.2	19.3	20.8	20.9	21.3	21.5	21.5	21.9	22.1	22.1	22.3	22.3	22.4	22.5
≥ 12000		17.1	19.7	21.0	22.5	22.6	23.3	23.5	23.5	24.0	24.3	24.3	24.4	24.4	24.5	24.7
≥ 10000		19.5	22.2	23.5	25.2	25.4	26.0	26.4	26.4	26.9	27.1	27.1	27.3	27.3	27.4	27.6
≥ 9000		20.6	23.3	24.6	26.3	26.5	27.1	27.5	27.5	28.0	28.3	28.3	28.4	28.4	28.6	28.7
≥ 8000		22.5	25.6	27.1	29.4	29.5	30.3	30.6	30.6	31.4	31.7	31.7	31.9	31.9	32.1	32.2
≥ 7000		23.4	26.7	28.9	31.1	31.3	32.2	32.6	32.6	33.3	33.6	33.6	33.8	33.8	34.0	34.1
≥ 6000		24.3	27.8	29.9	32.1	32.4	33.2	33.6	33.6	34.3	34.6	34.6	34.8	34.8	35.0	35.2
≥ 5000		25.5	29.3	31.4	33.9	34.1	35.0	35.4	35.4	36.1	36.4	36.4	36.6	36.6	36.8	36.9
≥ 4500		26.0	29.8	31.9	34.4	34.7	35.6	35.9	35.9	36.7	36.9	36.9	37.1	37.1	37.4	37.5
≥ 4000		28.4	32.9	35.0	37.8	38.0	39.1	39.4	39.4	40.2	40.4	40.4	40.6	40.6	40.9	41.0
≥ 3500		31.0	35.5	38.2	41.2	41.5	42.8	43.1	43.1	43.9	44.1	44.1	44.3	44.3	44.6	44.7
≥ 3000		36.5	42.4	45.6	49.1	49.6	51.3	51.7	51.7	52.6	52.8	52.8	53.1	53.1	53.3	53.4
≥ 2500		42.4	49.4	53.5	57.7	58.5	60.7	61.3	61.3	62.6	63.0	63.1	63.3	63.3	63.5	63.7
≥ 2000		47.7	56.5	61.9	67.2	68.7	72.0	72.9	72.9	74.4	74.8	74.8	75.1	75.1	75.3	75.5
≥ 1800		48.7	57.8	63.5	69.1	70.8	74.6	75.5	75.6	77.2	77.5	77.6	77.8	77.8	78.1	78.2
≥ 1500		50.5	61.5	68.4	74.9	77.0	81.6	82.7	82.7	84.5	84.9	84.9	85.1	85.1	85.5	85.6
≥ 1200		51.0	62.2	69.9	77.2	79.6	84.9	86.2	86.3	88.3	88.6	88.7	88.9	88.9	89.2	89.4
≥ 1000		51.5	62.9	71.3	79.4	81.9	87.5	89.2	89.4	91.8	92.1	92.2	92.4	92.4	92.7	92.9
≥ 900		51.7	63.2	71.6	79.8	82.2	87.9	89.6	89.8	92.3	92.6	92.7	92.9	92.9	93.3	93.4
≥ 800		51.7	63.3	71.8	80.1	82.7	88.5	90.3	90.5	93.1	93.6	93.8	94.2	94.2	94.7	94.9
≥ 700		52.0	63.5	72.2	80.7	83.3	89.5	91.5	91.7	94.4	95.0	95.1	95.6	95.6	96.2	96.3
≥ 600		52.0	63.5	72.2	80.9	83.4	89.9	91.9	92.1	95.1	95.8	95.9	96.6	96.6	97.1	97.3
≥ 500		52.0	63.6	72.3	81.2	83.8	90.5	92.5	92.7	95.9	96.6	96.8	97.7	97.7	98.6	98.8
≥ 400		52.0	63.6	72.3	81.3	83.8	90.7	92.7	92.9	96.2	96.9	97.1	98.1	98.1	98.9	99.2
≥ 300		52.0	63.6	72.3	81.3	83.8	90.7	92.8	93.0	96.2	97.1	97.3	98.5	98.5	99.3	99.6
≥ 200		52.0	63.6	72.3	81.3	83.8	90.7	92.8	93.0	96.2	97.2	97.4	98.7	98.7	99.6	99.9
≥ 100		52.0	63.6	72.3	81.3	83.8	90.7	92.8	93.0	96.2	97.2	97.4	98.8	98.8	99.7	99.9
≥ 0		52.0	63.6	72.3	81.3	83.8	90.7	92.8	93.0	96.2	97.2	97.4	98.8	98.8	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 1459

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KREA/CHUCH) 01-54,59,61-72

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥ 30	30	27	24	22	20	18	16	14	12	10	9	8	7	6	5
≥ 22000		19.4	19.6	20.2	20.6	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7	20.7
≥ 20000		23.5	25.4	26.3	26.9	27.1	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2
≥ 18000		23.9	25.5	26.4	27.1	27.2	27.3	27.3	27.3	27.3	27.3	27.3	27.3	27.3	27.3	27.3
≥ 17000		24.1	25.6	26.5	27.2	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4
≥ 16000		24.4	26.0	26.9	27.6	27.7	27.8	27.8	27.8	27.8	27.8	27.8	27.8	27.8	27.8	27.8
≥ 15000		26.1	27.3	28.8	29.6	29.8	29.9	29.9	29.9	29.9	29.9	29.9	29.9	29.9	29.9	29.9
≥ 14000		29.1	30.9	31.8	32.7	32.9	33.0	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.1	33.1
≥ 13000		30.3	32.0	33.1	34.0	34.2	34.3	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4
≥ 12000		32.6	34.6	35.9	37.4	37.8	37.9	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1	38.1
≥ 11000		34.3	36.7	38.5	40.0	40.5	40.6	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8
≥ 10000		34.9	37.4	39.2	40.7	41.1	41.4	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6	41.6
≥ 9000		35.1	38.7	40.6	42.1	42.5	42.9	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1
≥ 8500		36.7	39.2	41.1	42.9	43.4	43.7	44.0	44.0	44.0	44.0	44.0	44.0	44.0	44.0	44.0
≥ 8000		39.8	42.3	44.3	46.2	46.7	47.0	47.3	47.3	47.4	47.4	47.4	47.4	47.4	47.4	47.4
≥ 7500		43.6	46.4	48.4	50.4	50.9	51.3	51.6	51.6	51.7	51.7	51.7	51.7	51.7	51.7	51.7
≥ 7000		49.3	52.6	55.2	57.5	58.2	58.7	59.1	59.1	59.2	59.2	59.2	59.2	59.2	59.2	59.2
≥ 6500		57.5	62.1	65.2	67.7	68.4	69.3	69.7	69.7	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥ 6000		63.7	69.7	73.7	77.1	78.2	79.9	80.3	80.3	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 5500		65.3	71.7	76.0	79.6	80.8	82.8	83.2	83.2	83.5	83.6	83.6	83.6	83.6	83.6	83.6
≥ 5000		68.0	75.5	80.4	85.0	86.4	88.9	89.5	89.5	90.0	90.1	90.1	90.1	90.1	90.1	90.1
≥ 4500		68.7	76.9	82.6	87.9	90.1	93.0	93.8	93.8	94.5	94.6	94.6	94.7	94.7	94.7	94.7
≥ 4000		69.0	77.3	83.0	88.8	91.1	94.3	95.3	95.3	96.3	96.5	96.5	96.6	96.6	96.6	96.6
≥ 3500		69.0	77.3	83.1	88.8	91.4	94.7	95.8	95.8	96.7	96.9	96.9	97.0	97.0	97.0	97.0
≥ 3000		69.1	77.4	83.3	89.1	91.7	95.2	96.3	96.3	97.5	98.0	98.0	98.2	98.2	98.2	98.2
≥ 2500		69.1	77.5	83.5	89.5	92.1	95.7	97.0	97.0	99.2	98.6	98.8	99.0	99.0	99.0	99.0
≥ 2000		69.1	77.6	83.5	89.6	92.1	96.0	97.2	97.2	98.6	99.2	99.2	99.4	99.4	99.4	99.4
≥ 1800		69.1	77.6	83.5	89.6	92.1	96.2	97.5	97.5	98.9	99.4	99.4	99.8	99.8	99.8	99.8
≥ 1500		69.1	77.6	83.5	89.6	92.1	96.2	97.5	97.5	98.9	99.4	99.4	99.9	99.9	99.9	99.9
≥ 1200		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 1000		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 900		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 800		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 700		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 600		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 500		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 400		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 300		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 200		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 100		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0
≥ 0		69.1	77.6	83.5	89.6	92.1	96.2	97.6	97.6	99.0	99.5	99.5	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1451

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43273 CAMP PAGE AFB KOREA/CHUNCHON 51-54,55,61-72 1231-1400

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	6	5	4	3	2½	2	1½	1¼	1	¾	½	⅜	¼	0	
NO CEILING	25.2	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5
≥ 20000	33.7	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1	34.1
≥ 18000	33.7	34.1	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2	34.2
≥ 16000	33.9	34.3	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4
≥ 14000	34.4	34.8	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9	34.9
≥ 12000	35.8	36.2	36.4	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5
≥ 10000	39.5	40.0	40.2	40.2	40.2	40.2	40.2	40.2	40.2	40.2	40.2	40.2	40.2	40.2	40.2	40.2
≥ 9000	41.0	41.5	41.6	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7	41.7
≥ 8000	45.0	45.5	45.6	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7
≥ 7000	46.7	47.2	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4
≥ 6000	47.2	47.9	48.1	48.1	48.1	48.1	48.1	48.1	48.2	48.2	48.2	48.2	48.2	48.2	48.2	48.2
≥ 5000	48.3	49.0	49.1	49.2	49.2	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3
≥ 4500	48.9	49.6	49.7	49.8	49.8	49.9	49.9	49.9	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0
≥ 4000	53.5	54.2	54.3	54.6	54.6	54.7	54.7	54.7	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8
≥ 3500	57.2	58.2	58.4	58.6	58.6	58.7	58.7	58.7	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9
≥ 3000	67.2	68.2	69.0	69.5	69.5	69.6	69.6	69.6	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥ 2500	75.8	78.0	78.9	79.0	79.8	80.0	80.0	80.0	80.3	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 2000	80.1	83.0	84.2	85.6	86.1	86.6	86.6	86.6	87.1	87.2	87.2	87.4	87.4	87.4	87.4	87.4
≥ 1800	81.7	84.8	86.4	88.3	88.8	89.3	89.4	89.4	89.9	90.0	90.0	90.2	90.2	90.2	90.2	90.2
≥ 1600	83.7	87.4	89.6	92.4	93.0	94.0	94.2	94.2	94.8	94.9	94.9	95.2	95.2	95.2	95.2	95.2
≥ 1400	83.8	87.8	90.2	93.2	93.8	95.0	95.5	95.5	96.1	96.2	96.2	96.5	96.5	96.5	96.5	96.5
≥ 1200	84.0	88.4	91.3	94.5	95.1	96.6	97.1	97.1	97.9	98.0	98.0	98.3	98.3	98.3	98.3	98.3
≥ 1000	84.1	88.5	91.4	94.6	95.3	96.9	97.4	97.4	98.2	98.3	98.3	98.6	98.6	98.6	98.6	98.6
≥ 900	84.1	88.5	91.4	94.7	95.4	96.9	97.8	97.8	98.6	98.7	98.7	99.0	99.0	99.0	99.0	99.0
≥ 800	84.2	88.6	91.5	94.8	95.6	97.2	98.1	98.1	99.0	99.1	99.1	99.4	99.4	99.4	99.4	99.4
≥ 700	84.2	88.7	91.6	94.9	95.7	97.3	98.2	98.2	99.1	99.2	99.2	99.5	99.5	99.5	99.5	99.5
≥ 600	84.2	88.7	91.6	94.9	95.7	97.5	98.4	98.4	99.4	99.4	99.4	99.8	99.8	99.8	99.8	99.8
≥ 500	84.2	88.7	91.6	94.9	95.7	97.5	98.5	98.5	99.4	99.5	99.5	99.9	99.9	99.9	99.9	99.9
≥ 400	84.2	88.7	91.6	94.9	95.7	97.5	98.5	98.5	99.4	99.5	99.5	99.9	99.9	99.9	99.9	99.9
≥ 300	84.2	88.7	91.6	94.9	95.7	97.5	98.5	98.5	99.4	99.5	99.5	99.9	99.9	99.9	99.9	99.9
≥ 200	84.2	88.7	91.6	94.9	95.7	97.5	98.5	98.5	99.4	99.5	99.5	99.9	99.9	99.9	99.9	99.9
≥ 100	84.2	88.7	91.6	94.9	95.7	97.5	98.5	98.5	99.4	99.5	99.5	99.9	99.9	99.9	99.9	99.9
≥ 0	84.3	88.8	91.7	95.0	95.8	97.6	98.6	98.6	99.6	99.7	99.7	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1429

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHUN (STATION NAME) 51-54,56,61-72 (YEARS) MAR

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

12[illegible]-17[illegible]

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥5/16	≥¼	≥0
NO CEILING		28.0	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1
≥ 20000		39.3	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5	39.5
≥ 18000		39.5	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6	39.6
≥ 16000		39.6	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8
≥ 14000		40.4	40.5	40.5	40.5	40.5	40.5	40.5	40.5	40.5	40.5	40.5	40.5	40.5	40.5
≥ 12000		42.0	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1	42.1
≥ 10000		44.5	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8
≥ 9000		45.6	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8
≥ 8000		50.2	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6	50.6
≥ 7000		52.4	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8	52.8
≥ 6000		53.2	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5	53.5
≥ 5000		54.7	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1
≥ 4500		56.6	56.9	56.9	56.9	56.9	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0
≥ 4000		60.6	61.0	61.2	61.2	61.2	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 3500		65.5	66.0	66.1	66.2	66.2	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 3000		74.8	75.4	75.8	76.1	76.1	76.2	76.2	76.2	76.3	76.3	76.3	76.3	76.3	76.3
≥ 2500		79.8	81.2	82.3	82.6	82.6	82.8	82.8	82.8	83.0	83.0	83.0	83.0	83.0	83.0
≥ 2000		84.9	87.3	88.6	89.5	89.5	90.0	90.0	90.0	90.5	90.5	90.5	90.7	90.7	90.7
≥ 1800		85.6	88.3	89.7	90.6	90.6	91.3	91.4	91.4	91.9	91.9	91.9	92.1	92.1	92.1
≥ 1500		87.1	90.7	92.8	94.3	94.3	95.3	95.4	95.4	96.2	96.2	96.2	96.5	96.5	96.5
≥ 1200		87.5	91.2	93.5	95.3	95.4	96.4	96.7	96.7	97.4	97.4	97.4	97.7	97.7	97.7
≥ 1000		87.5	91.4	93.6	95.5	95.6	96.7	97.1	97.2	97.9	97.9	97.9	98.2	98.2	98.2
≥ 900		87.5	91.4	93.6	95.6	95.7	97.0	97.4	97.4	98.2	98.2	98.2	98.5	98.5	98.5
≥ 800		87.7	91.6	94.0	96.0	96.1	97.4	97.8	97.9	98.7	98.7	98.7	98.9	98.9	98.9
≥ 700		87.7	91.6	94.0	96.1	96.2	97.7	98.1	98.2	99.0	99.0	99.0	99.3	99.3	99.3
≥ 600		87.7	91.6	94.0	96.1	96.4	98.0	98.4	98.4	99.3	99.3	99.3	99.6	99.6	99.6
≥ 500		87.7	91.6	94.0	96.1	96.4	98.2	98.5	98.6	99.4	99.4	99.4	99.7	99.7	99.7
≥ 400		87.7	91.6	94.0	96.1	96.5	98.4	98.8	98.9	99.7	99.7	99.7	100.0	100.0	100.0
≥ 300		87.7	91.6	94.0	96.1	96.5	98.4	98.8	98.9	99.7	99.7	99.7	100.0	100.0	100.0
≥ 200		87.7	91.6	94.0	96.1	96.5	98.4	98.8	98.9	99.7	99.7	99.7	100.0	100.0	100.0
≥ 100		87.7	91.6	94.0	96.1	96.5	98.4	98.8	98.9	99.7	99.7	99.7	100.0	100.0	100.0
≥ 0		87.7	91.6	94.0	96.1	96.5	98.4	98.8	98.9	99.7	99.7	99.7	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1411

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-54,56,61-67
STATION NAME YEARS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1[illegible]-2000

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥1	≥1	≥1	≥1	≥5/8	≥1/2	≥0
NO CEILING		28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7	28.7
≥ 20000		40.2	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6	40.6
≥ 18000		41.6	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9
≥ 16000		42.1	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4	42.4
≥ 14000		43.5	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8
≥ 12000		47.2	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5
≥ 10000		51.8	52.1	52.1	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2
≥ 9000		52.8	53.1	53.1	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3
≥ 8000		56.7	57.1	57.1	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3	57.3
≥ 7000		58.5	59.0	59.0	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 6000		59.0	59.4	59.4	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6
≥ 5000		61.4	61.9	61.9	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1
≥ 4500		62.8	63.0	63.0	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
≥ 4000		68.0	68.5	68.7	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8
≥ 3500		73.6	74.2	74.5	74.7	74.7	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
≥ 3000		73.6	79.7	80.3	80.6	80.6	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0	81.0
≥ 2500		83.4	85.4	86.2	86.6	86.6	87.1	87.1	87.1	87.3	87.3	87.3	87.4	87.4	87.4	87.4
≥ 2000		86.8	89.2	90.5	91.4	91.4	92.0	92.0	92.0	92.3	92.3	92.3	92.5	92.5	92.5	92.5
≥ 1800		87.1	89.7	90.9	91.9	91.9	92.5	92.5	92.5	92.9	92.9	92.9	93.1	93.1	93.1	93.1
≥ 1500		87.7	91.6	93.4	94.3	94.3	95.2	95.2	95.2	95.9	95.9	95.9	96.0	96.0	96.0	96.0
≥ 1200		88.3	92.2	94.3	95.5	95.5	96.6	96.6	96.6	97.2	97.2	97.2	97.4	97.4	97.4	97.4
≥ 1000		88.8	92.6	94.8	96.3	96.3	97.4	97.4	97.4	98.2	98.3	98.3	98.5	98.5	98.5	98.5
≥ 900		88.8	92.6	95.1	96.6	96.6	98.0	98.0	98.0	98.8	98.9	98.9	99.1	99.1	99.1	99.1
≥ 800		88.8	92.6	95.2	96.9	97.1	98.5	98.5	98.5	99.2	99.4	99.4	99.7	99.7	99.7	99.7
≥ 700		88.8	92.6	95.2	96.9	97.1	98.5	98.5	98.5	99.2	99.4	99.4	99.7	99.7	99.7	99.7
≥ 600		88.8	92.6	95.2	96.9	97.2	98.6	98.6	98.6	99.4	99.5	99.5	99.8	99.8	99.8	99.8
≥ 500		88.8	92.6	95.2	96.9	97.2	98.6	98.6	98.6	99.4	99.5	99.5	99.8	99.8	99.8	99.8
≥ 400		88.8	92.6	95.2	96.9	97.4	98.8	98.8	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 300		88.8	92.6	95.2	96.9	97.4	98.8	98.8	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 200		88.8	92.6	95.2	96.9	97.4	98.8	98.8	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 100		88.8	92.6	95.2	96.9	97.4	98.8	98.8	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 0		88.8	92.6	95.2	96.9	97.4	98.8	98.8	98.8	99.5	99.7	99.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 651

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

49271 CAMP PAGE AAF KOREA/CHUNCHON 51-54 JUL

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	0	5/16	¼	0
NO CEILING		35.5	36.0	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8
≥ 20000		44.9	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2
≥ 15000		45.0	47.3	47.3	47.3	47.3	47.3	47.3	47.3	47.3	47.3	47.3	47.3	47.3	47.3	47.3
≥ 10000		46.5	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1
≥ 9000		47.3	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7
≥ 8000		49.2	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5
≥ 7000		50.8	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2
≥ 6000		51.3	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7
≥ 5000		53.5	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8	54.8
≥ 4500		54.6	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9	55.9
≥ 4000		55.1	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
≥ 3500		59.7	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0
≥ 3000		61.8	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2
≥ 2500		69.4	71.0	71.0	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 2000		73.1	75.3	75.3	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 1800		77.4	80.4	80.4	80.9	80.9	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5
≥ 1500		79.8	83.3	84.1	84.7	84.7	85.5	85.5	85.5	85.5	85.5	85.5	85.5	85.5	85.5	85.5
≥ 1200		84.1	88.4	89.5	90.1	90.1	91.4	91.4	91.4	91.9	92.2	92.2	92.2	92.2	92.2	92.2
≥ 1000		84.4	88.7	89.8	90.3	90.3	91.7	91.7	91.7	92.2	92.5	92.5	92.5	92.5	92.5	92.5
≥ 900		86.0	90.3	92.2	93.3	93.3	94.6	94.6	94.6	95.4	95.7	95.7	95.7	95.7	95.7	95.7
≥ 800		86.8	91.7	94.1	95.2	95.2	96.5	96.5	96.5	97.6	97.8	97.9	97.8	97.9	97.8	97.8
≥ 700		87.1	92.2	95.2	96.2	96.2	97.6	97.6	97.6	98.7	98.9	98.9	98.9	98.9	98.9	98.9
≥ 600		87.1	92.2	95.2	96.2	96.2	97.6	97.6	97.6	98.7	98.9	98.9	98.9	98.9	98.9	98.9
≥ 500		87.1	92.2	95.2	96.8	96.8	98.4	98.4	98.4	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 400		87.1	92.2	95.2	96.8	96.8	98.4	98.4	98.4	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 300		87.1	92.2	95.2	96.8	96.8	98.4	98.4	98.4	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 200		87.1	92.2	95.2	96.8	96.8	98.4	98.4	98.4	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 100		87.1	92.2	95.2	96.8	96.8	98.4	98.4	98.4	99.5	99.7	99.7	100.0	100.0	100.0	100.0
≥ 0		87.1	92.2	95.2	96.8	96.8	98.4	98.4	98.4	99.5	99.7	99.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 372

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

432/1 CAMP PAGE AAF (NIRE)/CHUCHON 51-54 AUG

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	0
NO CEILING		40.3	43.6	44.5	44.9	45.2	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7	45.7
≥ 20000		47.0	50.8	52.4	52.7	53.0	53.5	53.5	53.5	53.8	53.8	53.8	53.8	53.8	53.8	53.8
≥ 15000		47.0	50.8	52.7	53.0	53.2	53.8	53.8	53.8	54.0	54.0	54.0	54.0	54.0	54.0	54.0
≥ 14000		48.1	52.2	54.0	54.3	54.6	55.1	55.1	55.1	55.4	55.4	55.4	55.4	55.4	55.4	55.4
≥ 13000		49.2	54.0	55.9	56.2	56.5	57.0	57.0	57.0	57.3	57.3	57.3	57.3	57.3	57.3	57.3
≥ 12000		50.8	55.9	57.8	58.1	58.3	58.9	58.9	58.9	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 11000		54.3	59.7	61.6	61.8	62.1	62.6	62.6	62.6	62.9	62.9	62.9	62.9	62.9	62.9	62.9
≥ 10000		55.4	60.8	62.6	62.9	63.2	63.7	63.7	63.7	64.0	64.0	64.0	64.0	64.0	64.0	64.0
≥ 9000		59.9	65.6	67.7	68.0	68.3	68.8	68.8	68.8	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 8000		61.8	67.5	69.6	69.9	70.2	70.7	70.7	70.7	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 7000		61.8	67.7	70.2	70.4	70.7	71.2	71.2	71.2	71.5	71.5	71.5	71.5	71.5	71.5	71.5
≥ 6000		64.5	70.4	72.8	73.1	73.4	73.9	73.9	73.9	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 5000		65.1	71.5	74.2	74.5	74.7	75.3	75.3	75.3	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 4500		68.0	74.5	77.4	77.7	78.0	78.5	78.5	78.5	79.0	79.0	79.0	79.0	79.0	79.0	79.0
≥ 4000		68.3	74.7	79.0	79.6	79.8	80.6	80.6	80.6	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 3500		72.0	78.8	83.3	83.9	84.1	85.2	85.2	85.2	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 3000		76.3	83.3	87.9	88.4	88.7	89.8	89.8	89.8	90.3	90.3	90.3	90.3	90.3	90.3	90.3
≥ 2500		78.8	86.6	91.7	92.5	92.7	93.8	93.8	93.8	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 2000		79.0	86.3	91.9	93.0	93.3	94.4	94.4	94.4	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 1800		79.0	87.1	92.2	93.3	93.5	94.9	94.9	94.9	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 1500		79.6	87.6	92.7	93.8	94.1	95.4	95.4	95.4	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1200		79.8	87.9	93.0	94.1	94.4	95.7	95.7	95.7	96.5	96.5	96.5	96.5	96.5	96.5	96.8
≥ 1000		79.8	87.9	93.0	94.1	94.4	95.7	95.7	95.7	96.5	96.5	96.5	97.0	97.0	97.0	97.3
≥ 900		79.8	88.4	93.8	94.9	95.2	96.5	96.5	96.5	97.3	97.3	97.3	97.8	97.8	97.8	98.1
≥ 800		79.8	88.4	93.8	94.9	95.2	96.5	96.5	96.5	97.6	97.6	97.6	98.1	98.1	98.1	98.4
≥ 700		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.1	98.1	98.1	98.7	98.7	98.7	98.9
≥ 600		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.4	98.4	98.4	99.2	99.2	99.2	99.5
≥ 500		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.4	98.4	98.4	99.2	99.2	99.2	99.5
≥ 400		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.4	98.4	98.4	99.2	99.2	99.2	99.5
≥ 300		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.4	98.4	98.4	99.2	99.2	99.2	99.5
≥ 200		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.7	98.7	98.7	99.7	99.7	99.7	100.0
≥ 100		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.7	98.7	98.7	99.7	99.7	99.7	100.0
≥ 0		79.8	88.4	94.1	95.2	95.4	97.0	97.0	97.0	98.7	98.7	98.7	99.7	99.7	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 372

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

03271 CAMP PAGE AAF KOREA/CHUCH'ON 51-54,61,63-67,70

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0500

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1	≥1½	≥1	≥¾	≥½	≥¼	≥0		
NO CEILING		24.3	27.2	29.6	30.7	31.3	32.6	32.9	32.9	33.1	33.2	33.2	33.4	33.4	33.5	33.5
≥ 20000		26.7	29.9	32.4	33.7	34.3	35.6	35.9	35.9	36.1	36.3	36.3	36.4	36.4	36.6	36.6
≥ 18000		26.7	29.9	32.7	34.0	34.7	35.9	36.3	36.3	36.4	36.6	36.6	36.7	36.7	36.9	36.9
≥ 15000		27.0	30.2	33.1	34.3	35.1	36.4	36.7	36.7	36.9	37.1	37.1	37.2	37.2	37.4	37.4
≥ 14000		27.0	30.2	33.1	34.3	35.1	36.4	36.7	36.7	36.9	37.1	37.1	37.2	37.2	37.4	37.4
≥ 12000		28.4	31.6	34.5	35.9	36.7	38.5	38.8	38.8	39.0	39.1	39.1	39.3	39.3	39.5	39.5
≥ 10000		32.6	37.4	41.1	42.5	43.3	45.0	45.4	45.4	45.5	46.0	46.0	46.3	46.3	46.5	46.5
≥ 9000		34.3	39.5	43.1	44.6	45.7	47.6	47.9	47.9	48.1	48.6	48.6	48.9	48.9	49.1	49.1
≥ 8000		38.0	43.1	47.1	48.6	49.7	51.6	51.9	51.9	52.1	52.6	52.6	52.9	52.9	53.0	53.0
≥ 7000		39.0	44.4	48.6	50.2	51.3	53.4	53.7	53.7	53.8	54.3	54.3	54.6	54.6	54.8	54.8
≥ 6000		39.3	44.7	48.9	50.6	51.8	53.8	54.2	54.2	54.3	54.8	54.8	55.1	55.1	55.3	55.3
≥ 5000		40.9	47.0	51.1	53.2	54.3	56.4	56.7	56.7	56.9	57.3	57.3	57.7	57.7	57.8	57.8
≥ 4500		41.9	47.9	52.1	54.3	55.4	57.5	57.8	57.8	58.0	58.5	58.5	58.8	58.8	58.9	58.9
≥ 4000		44.6	50.8	55.4	57.7	58.8	61.2	61.5	61.5	61.7	62.1	62.1	62.5	62.5	62.6	62.6
≥ 3500		45.7	52.1	56.7	58.9	60.1	62.5	62.8	62.8	62.9	63.4	63.4	63.7	63.7	63.9	63.9
≥ 3000		50.8	58.1	63.4	65.8	67.3	70.0	70.3	70.3	70.6	71.1	71.1	71.4	71.6	71.7	71.7
≥ 2500		55.1	64.7	70.6	73.3	74.8	77.5	77.8	77.8	78.1	78.8	78.8	79.1	79.2	79.4	79.4
≥ 2000		57.7	68.4	74.9	78.3	79.7	83.4	84.0	84.0	84.3	85.0	85.0	85.3	85.5	85.6	85.6
≥ 1800		58.8	69.5	76.0	79.1	81.0	84.7	85.3	85.3	85.6	86.3	86.3	86.6	86.7	86.9	86.9
≥ 1500		59.4	70.6	77.5	80.5	82.4	86.4	87.1	87.1	87.5	88.2	88.2	88.7	88.8	89.0	89.0
≥ 1200		59.7	70.9	78.3	81.3	83.2	87.7	88.3	88.3	88.8	89.5	89.5	89.9	90.1	90.3	90.3
≥ 1000		59.9	71.2	78.8	82.3	84.2	89.1	89.8	89.8	90.4	91.1	91.1	91.5	91.7	91.9	92.0
≥ 900		59.9	71.4	78.9	82.4	84.7	90.3	90.9	90.9	91.5	92.2	92.2	92.7	92.8	93.0	93.1
≥ 800		59.9	71.6	79.2	82.7	85.0	90.9	92.0	92.2	93.1	93.8	93.8	94.6	94.7	94.9	95.0
≥ 700		59.9	71.6	79.2	82.9	85.1	91.1	92.2	92.3	93.5	94.1	94.1	94.9	95.0	95.2	95.4
≥ 600		59.9	71.7	79.4	83.1	85.3	91.4	92.5	92.7	93.9	94.7	94.7	95.5	95.7	95.8	96.0
≥ 500		59.9	71.7	79.4	83.2	85.6	91.7	93.0	93.1	94.7	95.7	95.7	96.6	96.8	97.0	97.4
≥ 400		59.9	71.7	79.4	83.2	85.6	91.9	93.1	93.3	95.0	96.2	96.2	97.1	97.3	97.4	97.9
≥ 300		59.9	71.7	79.4	83.2	85.6	91.9	93.1	93.3	95.2	96.3	96.3	97.8	97.9	98.2	98.7
≥ 200		59.9	71.7	79.4	83.2	85.6	91.9	93.1	93.3	95.4	96.5	96.5	98.1	98.2	98.6	99.7
≥ 100		59.9	71.7	79.4	83.2	85.6	91.9	93.1	93.3	95.4	96.5	96.5	98.1	98.2	98.7	100.0
≥ 0		59.9	71.7	79.4	83.2	85.6	91.9	93.1	93.3	95.4	96.5	96.5	98.1	98.2	98.7	100.0

TOTAL NUMBER OF OBSERVATIONS 626

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-54,56,61-71 AUG

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

0600-0800

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥9	≥8	≥7	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	0
≥ 20000	15.6	17.1	17.8	18.9	19.1	19.9	19.9	20.0	20.4	20.6	20.6	20.6	20.6	20.6	20.6
≥ 15000	17.6	19.6	20.7	22.0	22.3	23.4	23.4	23.6	24.2	24.4	24.4	24.5	24.6	24.6	24.6
≥ 10000	17.8	19.9	20.9	22.2	22.5	23.6	23.7	23.8	24.4	24.7	24.7	24.7	24.8	24.8	24.8
≥ 9000	17.8	19.9	20.9	22.2	22.5	23.6	23.7	23.8	24.4	24.7	24.7	24.7	24.8	24.8	24.8
≥ 8000	18.6	20.8	21.7	23.0	23.3	24.4	24.4	24.6	25.2	25.5	25.5	25.7	25.7	25.7	25.7
≥ 7000	19.7	21.9	22.9	24.3	24.7	25.9	25.9	26.1	26.7	27.0	27.0	27.2	27.2	27.2	27.2
≥ 6000	23.0	25.7	26.8	28.2	28.6	29.9	30.0	30.1	30.6	31.1	31.1	31.3	31.3	31.3	31.3
≥ 5000	23.9	26.7	27.9	29.5	30.0	31.3	31.4	31.5	32.2	32.5	32.5	32.7	32.8	32.8	32.8
≥ 4500	26.6	29.8	31.5	33.7	34.3	35.6	35.8	35.9	36.6	36.9	36.9	37.1	37.1	37.1	37.1
≥ 4000	28.2	32.6	34.6	37.1	37.7	39.1	39.2	39.4	40.0	40.4	40.4	40.6	40.6	40.6	40.6
≥ 3500	29.0	33.6	35.4	38.0	38.6	40.0	40.1	40.3	41.0	41.4	41.4	41.6	41.6	41.6	41.6
≥ 3000	30.7	35.6	37.3	40.0	40.6	42.0	42.2	42.3	43.0	43.4	43.4	43.6	43.7	43.7	43.7
≥ 2500	31.0	36.0	37.9	40.6	41.1	42.6	42.7	42.9	43.6	44.0	44.0	44.2	44.2	44.2	44.2
≥ 2000	33.5	38.7	40.7	43.4	44.0	45.5	45.9	46.0	46.7	47.2	47.2	47.5	47.5	47.5	47.5
≥ 1800	34.9	40.4	42.7	45.7	46.2	47.7	48.1	48.2	49.0	49.4	49.5	49.7	49.7	49.7	49.7
≥ 1600	38.5	44.9	47.6	51.0	51.7	53.5	53.9	54.0	55.0	55.4	55.5	55.8	55.9	55.9	55.9
≥ 1400	43.1	50.5	54.0	58.0	58.9	60.9	61.3	61.4	62.7	63.1	63.2	63.7	63.7	63.8	63.8
≥ 1200	46.7	55.2	60.1	65.2	66.5	68.6	69.5	69.6	71.3	71.8	71.9	72.5	72.5	72.6	72.6
≥ 1000	47.4	56.3	61.6	67.1	68.3	70.7	71.3	71.5	73.2	73.8	73.9	74.5	74.6	74.6	74.6
≥ 900	48.6	58.4	64.7	70.8	72.1	75.1	76.1	76.2	78.2	78.9	78.9	79.6	79.6	79.7	79.8
≥ 800	48.7	58.9	65.7	72.0	73.3	76.5	77.7	77.8	79.9	80.6	80.6	81.3	81.4	81.4	81.5
≥ 700	48.8	59.2	65.9	72.6	74.3	78.3	79.6	79.7	82.2	83.0	83.1	84.0	84.1	84.2	84.3
≥ 600	48.8	59.2	65.9	72.8	74.4	78.6	80.1	80.3	82.8	83.7	83.8	84.7	84.8	84.9	85.0
≥ 500	48.9	59.4	66.2	73.1	74.8	79.2	81.0	81.1	83.8	84.9	85.0	86.0	86.2	86.3	86.4
≥ 400	49.0	59.4	66.3	73.3	75.1	79.8	81.9	82.2	85.2	86.5	86.6	87.7	87.9	88.1	88.3
≥ 300	49.1	59.6	66.8	73.5	75.5	80.4	83.0	83.2	86.7	88.2	88.4	89.7	89.9	90.2	90.4
≥ 200	49.1	59.6	66.6	73.7	75.8	81.1	84.2	84.4	88.5	90.7	91.0	93.0	93.3	93.7	94.3
≥ 100	49.1	59.6	66.7	73.8	76.0	81.3	84.4	84.7	89.0	91.7	92.0	94.3	94.6	95.0	95.6
≥ 0	49.1	59.7	66.8	74.1	76.3	81.6	85.0	85.4	90.0	92.8	93.1	95.4	95.8	96.3	96.9
	49.1	59.7	66.8	74.1	76.3	81.8	85.2	85.7	90.7	93.8	94.1	96.9	97.3	97.8	98.5
	49.1	59.7	66.8	74.1	76.3	81.8	85.2	85.7	90.7	93.9	94.5	97.3	97.7	98.4	99.2
	49.1	59.7	66.8	74.1	76.3	81.8	85.2	85.7	90.7	94.0	94.6	97.3	97.8	98.4	100.0

TOTAL NUMBER OF OBSERVATIONS 1395

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

42271 CAMP PAGE AAF KOREA/CHUCHEON 51-54,56,61-71
STATION NAME YEARS

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0600-1100

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	¾	½	¼	0
NO CEILING	24.7	25.5	26.3	26.6	26.8	26.8	26.8	26.8	26.8	26.8	26.8	26.8	26.8	26.8	26.9
≥ 20000	29.4	30.3	32.0	32.4	32.6	32.7	32.7	32.7	32.7	32.7	32.7	32.7	32.7	32.7	32.7
≥ 18000	29.8	31.2	32.4	32.9	33.0	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2
≥ 16000	29.9	31.3	32.5	32.9	33.1	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2	33.2
≥ 14000	30.5	31.9	33.2	33.6	33.7	33.9	33.9	33.9	33.9	33.9	33.9	33.9	33.9	33.9	33.9
≥ 12000	31.8	33.3	34.5	35.0	35.1	35.3	35.3	35.3	35.3	35.3	35.3	35.3	35.3	35.3	35.3
≥ 10000	35.5	37.1	38.6	39.3	39.5	39.6	39.7	39.7	39.7	39.7	39.7	39.7	39.7	39.7	39.7
≥ 9000	36.3	37.9	39.6	40.4	40.6	40.7	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9
≥ 8000	40.4	42.2	44.1	45.3	45.5	45.7	45.9	45.9	46.0	46.0	46.0	46.0	46.0	46.0	46.0
≥ 7000	43.2	45.3	47.5	49.1	49.2	49.7	49.9	49.9	50.0	50.0	50.0	50.0	50.0	50.0	50.0
≥ 6000	44.2	46.4	48.9	50.5	50.7	51.1	51.3	51.3	51.4	51.4	51.4	51.4	51.4	51.4	51.4
≥ 5000	45.3	47.5	50.1	52.0	52.1	52.6	52.6	52.8	52.9	52.9	52.9	52.9	52.9	52.9	52.9
≥ 4500	45.9	48.1	50.7	52.6	52.7	53.2	53.4	53.4	53.5	53.5	53.5	53.5	53.5	53.5	53.5
≥ 4000	47.6	49.9	52.7	54.8	54.9	55.6	55.8	55.8	55.9	55.9	55.9	55.9	55.9	55.9	55.9
≥ 3500	50.0	52.4	55.3	57.5	57.7	58.4	58.7	58.7	58.8	58.8	58.9	58.8	58.8	58.6	58.8
≥ 3000	54.4	57.7	61.1	63.4	63.6	64.5	64.9	64.9	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 2500	59.9	64.5	68.7	71.7	72.0	72.9	73.3	73.3	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 2000	64.6	69.7	75.4	79.4	79.7	81.0	81.6	81.6	81.9	81.9	81.9	81.9	81.9	81.9	81.9
≥ 1800	66.3	71.9	77.8	81.8	82.3	83.7	84.3	84.3	84.7	84.7	84.7	84.7	84.7	84.7	84.7
≥ 1500	67.6	73.7	80.1	85.0	85.7	87.6	88.2	88.2	88.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 1200	68.1	74.7	81.8	87.5	88.1	90.3	91.1	91.1	91.6	91.6	91.6	91.6	91.6	91.6	91.6
≥ 1000	68.1	74.9	82.8	89.1	89.8	92.7	93.5	93.5	94.2	94.2	94.2	94.2	94.3	94.3	94.3
≥ 900	68.2	75.1	83.0	89.4	90.1	92.9	93.8	93.9	94.5	94.5	94.5	94.5	94.7	94.7	94.7
≥ 800	68.2	75.1	83.1	89.8	90.5	93.7	94.7	94.8	95.6	95.7	95.7	95.7	95.9	95.9	95.9
≥ 700	68.2	75.1	83.2	90.3	91.2	94.8	96.0	96.1	97.2	97.4	97.4	97.4	97.5	97.5	97.5
≥ 600	68.2	75.1	83.4	90.7	91.7	95.5	96.9	97.1	98.3	98.5	98.5	98.6	98.8	98.8	98.8
≥ 500	68.2	75.1	83.4	90.8	91.8	95.8	97.2	97.5	98.8	99.0	99.1	99.3	99.5	99.5	99.5
≥ 400	68.2	75.1	83.4	90.8	91.9	96.0	97.5	97.7	99.1	99.3	99.3	99.6	99.8	99.8	99.8
≥ 300	68.2	75.1	83.4	90.8	91.9	96.1	97.5	97.9	99.2	99.4	99.5	99.8	99.9	99.9	99.9
≥ 200	68.2	75.1	83.4	90.8	91.9	96.1	97.5	97.9	99.2	99.4	99.5	99.8	99.9	99.9	99.9
≥ 100	68.2	75.1	83.4	90.8	91.9	96.1	97.5	97.9	99.2	99.4	99.5	99.8	99.9	99.9	99.9
≥ 0	68.3	75.2	83.5	90.9	91.9	96.1	97.6	98.0	99.3	99.5	99.6	99.9	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1375

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 51-54,56,61-71 (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥5/8	≥½	≥¼
NO CEILING		33.0	33.5	33.5	33.7	33.7	33.7	33.7	33.7	33.7	33.7	33.7	33.7	33.7	33.7
≥ 20000		41.1	41.7	41.8	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0
≥ 18000		42.1	42.7	42.8	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1
≥ 16000		42.3	42.8	43.0	43.2	43.2	43.2	43.2	43.2	43.2	43.2	43.2	43.2	43.2	43.2
≥ 14000		42.6	43.1	43.3	43.5	43.5	43.5	43.5	43.5	43.5	43.5	43.5	43.5	43.5	43.5
≥ 12000		44.3	45.0	45.1	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4
≥ 10000		48.2	49.0	49.1	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3
≥ 9000		49.7	50.6	50.8	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0	51.0
≥ 8000		54.7	55.6	55.9	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0
≥ 7000		57.6	58.7	59.1	59.4	59.4	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5
≥ 6000		58.6	59.7	60.3	60.5	60.5	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 5000		59.6	61.0	61.7	61.9	61.9	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0
≥ 4500		60.3	61.6	62.5	62.8	62.8	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
≥ 4000		63.0	64.6	65.3	65.9	65.9	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2	66.2
≥ 3500		67.0	68.7	69.5	70.0	70.0	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 3000		75.1	77.2	78.4	79.0	79.0	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 2500		81.1	83.9	85.6	86.4	86.4	86.9	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0
≥ 2200		85.6	89.2	91.7	92.8	92.8	93.4	93.6	93.6	93.8	93.8	93.8	93.8	93.8	93.8
≥ 2000		86.6	90.3	92.8	94.0	94.0	94.8	95.0	95.0	95.2	95.2	95.2	95.2	95.2	95.2
≥ 1800		87.5	91.5	94.7	95.9	95.9	96.9	97.1	97.1	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1600		87.8	92.0	95.3	96.7	96.8	97.7	97.9	97.9	98.1	98.2	98.2	98.2	98.2	98.2
≥ 1400		87.9	92.2	95.6	97.3	97.5	98.5	98.7	98.7	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1200		87.9	92.2	95.6	97.3	97.6	98.6	98.7	98.7	99.0	99.1	99.1	99.1	99.1	99.1
≥ 1000		87.9	92.3	95.6	97.6	97.8	98.9	99.0	99.0	99.3	99.4	99.4	99.4	99.4	99.4
≥ 900		87.9	92.3	95.7	97.6	97.9	99.0	99.2	99.2	99.6	99.6	99.6	99.6	99.6	99.6
≥ 800		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.7	99.8	99.8	99.8	99.8	99.8
≥ 700		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.7	99.8	99.8	99.8	99.8	99.8
≥ 600		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.7	99.9	99.9	99.9	99.9	99.9
≥ 500		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.8	100.0	100.0	100.0	100.0	100.0
≥ 400		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.8	100.0	100.0	100.0	100.0	100.0
≥ 300		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.8	100.0	100.0	100.0	100.0	100.0
≥ 200		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.8	100.0	100.0	100.0	100.0	100.0
≥ 100		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.8	100.0	100.0	100.0	100.0	100.0
≥ 0		88.0	92.4	95.8	97.7	97.9	99.1	99.3	99.3	99.8	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1356

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAPE PAGE AAF KUNEI/CHIGNIK 51-54,57,61-71 AK

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1300-1700

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	0	≥¼	≥½	≥0
NO CEILING		36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2	36.2
≥ 20000		47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2
≥ 15000		47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9
≥ 12000		48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4
≥ 10000		49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6
≥ 9000		52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0
≥ 8000		55.9	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0
≥ 7000		57.0	57.1	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2
≥ 6500		61.5	61.7	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8
≥ 6000		64.0	64.1	64.3	64.3	64.3	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 5500		64.4	64.5	64.7	64.7	64.7	64.7	64.7	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8
≥ 5000		66.1	66.3	66.5	66.5	66.5	66.6	66.6	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7
≥ 4500		66.9	67.1	67.4	67.5	67.5	67.6	67.6	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 4000		70.0	70.6	70.9	71.0	71.0	71.0	71.0	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1
≥ 3500		74.9	75.5	75.8	76.0	76.0	76.2	76.2	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 3000		82.8	83.8	84.6	85.0	85.0	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 2500		86.1	87.3	88.2	88.8	88.9	89.2	89.3	89.4	89.5	89.5	89.5	89.5	89.5	89.5	89.5
≥ 2000		88.5	90.4	92.3	93.5	93.8	94.5	94.9	94.6	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1800		89.1	91.0	93.0	94.2	94.5	95.2	95.3	95.4	95.8	95.9	95.9	96.0	96.0	96.0	96.0
≥ 1500		90.0	92.2	94.2	95.7	96.0	96.7	96.8	96.9	97.3	97.4	97.4	97.5	97.5	97.5	97.5
≥ 1400		90.1	92.4	94.8	96.3	96.6	97.4	97.5	97.5	98.0	98.1	98.1	98.2	98.2	98.2	98.2
≥ 1000		90.1	92.4	94.9	96.6	96.9	98.0	98.1	98.1	98.7	98.7	98.7	98.9	98.9	98.9	98.9
≥ 900		90.1	92.4	94.9	96.6	96.9	98.1	98.2	98.3	99.0	99.0	99.0	99.3	99.3	99.3	99.3
≥ 800		90.1	92.4	95.0	96.6	97.0	98.1	98.3	98.4	99.0	99.1	99.1	99.3	99.3	99.3	99.3
≥ 700		90.1	92.4	95.0	96.6	97.1	98.2	98.4	98.4	99.1	99.2	99.2	99.5	99.5	99.5	99.5
≥ 600		90.1	92.4	95.0	96.6	97.1	98.2	98.4	98.5	99.3	99.3	99.3	99.6	99.6	99.6	99.6
≥ 500		90.1	92.4	95.0	96.6	97.1	98.2	98.4	98.5	99.3	99.4	99.4	99.8	99.8	99.8	99.8
≥ 400		90.1	92.4	95.1	96.7	97.2	98.3	98.5	98.6	99.4	99.6	99.6	99.9	99.9	99.9	99.9
≥ 300		90.1	92.4	95.1	96.7	97.2	98.3	98.5	98.6	99.4	99.6	99.6	99.9	99.9	99.9	99.9
≥ 200		90.1	92.4	95.1	96.7	97.2	98.4	98.6	98.7	99.5	99.6	99.6	100.0	100.0	100.0	100.0
≥ 100		90.1	92.4	95.1	96.7	97.2	98.4	98.6	98.7	99.5	99.6	99.6	100.0	100.0	100.0	100.0
≥ 0		90.1	92.4	95.1	96.7	97.2	98.4	98.6	98.7	99.5	99.6	99.6	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1336

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KUNSAN/CHUNCHON 51-54,55,61-62,64-67

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS

1200-2000

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	10	7	5	4	3	2½	2	1½	1¼	1	¾	½	¼	0		
22000	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4	36.4		
20000	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2	50.2		
18000	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3		
17000	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6		
16000	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3		
15000	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6	58.6		
14000	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8		
13000	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2	63.2		
12000	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9		
11000	68.5	68.5	68.7	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9		
10000	69.4	69.5	69.7	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9		
9000	71.4	71.5	71.9	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0		
8000	72.2	72.4	72.7	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8	72.8		
7000	75.8	76.2	76.5	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7		
6000	78.8	79.3	79.6	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8	79.8		
5000	85.1	86.1	86.8	86.9	86.9	86.9	86.9	86.9	87.1	87.1	87.1	87.1	87.1	87.1		
4500	88.7	89.7	90.6	90.7	91.1	91.1	91.1	91.1	91.2	91.2	91.2	91.2	91.2	91.2		
4000	90.7	91.7	93.7	94.0	94.4	95.0	95.0	95.0	95.4	95.4	95.4	95.5	95.5	95.5	95.5	
3500	91.1	92.1	94.0	94.4	94.7	95.4	95.4	95.4	95.7	95.7	95.7	95.9	95.9	95.9	95.9	
3000	91.7	92.7	94.9	95.5	95.9	96.7	96.9	96.9	97.5	97.5	97.5	97.7	97.7	97.7	97.7	
2500	91.9	92.9	95.0	95.9	96.2	97.0	97.2	97.2	97.8	97.8	97.8	98.0	98.0	98.0	98.0	
2000	91.9	92.9	95.4	96.4	96.9	97.8	98.2	98.2	99.2	99.2	99.2	99.5	99.5	99.5	99.5	
1800	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.3	99.3	99.3	99.7	99.7	99.7	99.7	
1500	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.3	99.3	99.3	99.7	99.7	99.7	99.7	
1200	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.5	99.5	99.5	99.8	99.8	99.8	99.8	
1000	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
900	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
800	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
700	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
600	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
500	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
400	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
300	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
200	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
100	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	
0	91.9	92.9	95.4	96.4	96.9	98.0	98.3	98.3	99.7	99.7	99.7	100.0	100.0	100.0	100.0	

TOTAL NUMBER OF OBSERVATIONS 604

DATA PROCESSING BRANCH
SAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43274 CAMP PAGE AAB, KOREA/CHUNCHEON [illegible] 2[illegible]-23[illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	46.1	46.8	46.8	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3
	54.7	56.4	58.4	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9	58.9
	55.2	56.9	58.9	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5
	59.3	60.0	60.0	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5
	63.5	64.5	64.5	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
	63.2	67.2	67.2	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
	63.9	69.6	69.6	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1
	69.4	70.7	70.7	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
	70.9	75.2	75.2	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
	70.9	75.2	75.5	76.0	76.0	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
	72.5	77.1	77.3	77.9	77.9	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1
	73.3	77.9	78.1	78.7	78.7	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9
	74.1	78.7	78.9	79.5	79.5	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7
	77.6	82.7	82.9	83.7	83.7	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0	84.0
≥ 3500	79.5	84.8	85.1	85.9	85.9	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1
≥ 3000	81.9	87.2	87.5	88.3	88.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3	89.3
≥ 2500	84.5	91.2	92.0	92.8	92.8	93.9	93.9	93.9	94.4	94.4	94.4	94.4	94.4	94.4	94.4	94.4
≥ 2000	85.6	92.8	93.9	94.7	94.7	96.3	96.3	96.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1800	85.6	92.8	93.9	94.7	94.7	96.3	96.3	96.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1500	86.7	93.9	94.9	95.7	95.7	97.3	97.6	97.6	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1200	86.7	93.9	94.9	95.7	95.7	97.3	97.6	97.6	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1000	86.7	94.1	95.7	96.5	96.5	98.1	98.4	98.4	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 900	86.7	94.1	95.7	96.5	96.5	98.1	98.4	98.4	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 800	86.7	94.1	95.7	96.5	96.5	98.4	98.7	98.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 700	86.7	94.1	95.7	96.5	96.5	98.4	98.7	98.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 600	86.7	94.1	95.7	96.8	96.8	98.7	98.9	98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500	86.7	94.1	95.7	96.8	96.8	98.7	98.9	98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400	86.7	94.1	95.7	96.8	96.8	98.7	98.9	98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300	86.7	94.1	95.7	96.8	96.8	98.7	98.9	98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	86.7	94.1	95.7	96.8	96.8	98.7	98.9	98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100	86.7	94.1	95.7	96.8	96.8	98.7	98.9	98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0	86.7	94.1	95.7	96.8	96.8	98.7	98.9	98.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 375

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43274 CAMP PAGE AAF KOREA/CHUNCHON 51-54 [illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

0000-0200

VISIBILITY STATUTE MILES

CEILING FEET	26	25	24	23	22	21	2	2	2	2	2	2	2	2	2
[illegible]	49.2	53.3	57.0	58.9	58.9	60.0	60.0	60.0	60.0	60.6	60.6	60.6	60.6	60.6	60.6
[illegible]	51.4	55.6	62.2	64.3	63.3	64.4	64.4	64.4	64.4	65.6	65.6	65.0	65.0	65.0	65.0
[illegible]	53.1	57.2	63.9	65.0	65.0	66.1	66.1	66.1	66.1	66.7	66.7	66.7	66.7	66.7	66.7
[illegible]	53.3	57.8	64.4	65.6	65.6	66.7	66.7	66.7	66.7	67.2	67.2	67.2	67.2	67.2	67.2
[illegible]	56.4	61.4	68.1	69.2	69.2	70.3	70.3	70.3	70.3	70.8	70.8	70.8	70.8	70.8	70.8
[illegible]	60.6	65.8	73.3	74.7	74.7	75.8	75.8	75.8	75.8	76.4	76.4	76.4	76.4	76.4	76.4
[illegible]	62.2	67.8	75.8	77.2	77.2	78.3	78.3	78.3	78.3	78.9	78.9	78.9	78.9	78.9	78.9
[illegible]	62.2	67.8	75.3	77.2	77.2	78.3	78.3	78.3	78.3	78.9	78.9	78.9	78.9	78.9	78.9
[illegible]	63.9	70.8	78.9	80.3	80.3	81.4	81.4	81.4	81.4	81.9	81.9	81.9	81.9	81.9	81.9
[illegible]	66.1	73.1	81.1	82.5	82.5	83.6	83.6	83.6	83.6	84.2	84.2	84.2	84.2	84.2	84.2
[illegible]	66.4	73.3	81.4	82.8	82.8	84.4	84.4	84.4	84.4	85.0	85.0	85.0	85.0	85.0	85.0
[illegible]	67.8	72.0	83.1	84.4	84.4	86.1	86.1	86.1	86.1	86.7	86.7	86.7	86.7	86.7	86.7
[illegible]	68.9	76.7	84.7	86.1	86.1	87.8	88.1	88.1	88.1	88.6	88.6	88.6	88.6	88.6	88.6
[illegible]	70.3	77.8	85.3	87.8	87.8	89.4	90.3	90.3	90.3	90.8	90.8	90.8	90.8	90.8	90.8
[illegible]	70.3	78.3	86.9	88.9	88.9	90.6	91.4	91.4	91.4	91.9	91.9	91.9	91.9	91.9	91.9
[illegible]	72.2	80.0	89.2	91.1	91.1	93.1	93.9	93.9	93.9	94.4	94.4	94.4	94.4	94.4	94.4
[illegible]	73.9	82.8	91.4	93.3	93.3	95.8	96.9	96.9	97.5	98.1	98.1	98.1	98.1	98.1	98.1
[illegible]	75.0	83.9	92.5	94.4	94.4	96.9	98.1	98.1	98.6	99.2	99.2	99.2	99.2	99.2	99.2
[illegible]	75.0	83.9	92.5	94.4	94.4	96.9	98.1	98.1	98.6	99.2	99.2	99.2	99.2	99.2	99.2
[illegible]	75.0	83.9	92.5	94.7	94.7	97.2	98.3	98.3	98.9	99.4	99.4	99.4	99.4	99.4	99.4
[illegible]	75.0	83.9	92.5	94.7	94.7	97.5	98.6	98.6	99.2	99.7	99.7	99.7	99.7	99.7	99.7
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0
[illegible]	75.0	83.9	92.5	94.7	94.7	97.8	98.9	98.9	99.4	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 360

USAF ETAC [illegible] 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUCHON 21-54,61,63-66,70

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0700-0900

CEILING (FEET)	VISIBILITY STATUTE MILES													
	≥10	≥7	≥4	≥3	≥2	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥1	≥1
	35.5	40.5	41.7	42.5	42.9	44.0	44.5	44.5	45.4	45.5	45.5	46.2	46.2	46.6
	39.5	45.4	47.4	48.2	48.9	50.1	50.6	50.6	51.3	51.9	51.9	52.8	52.8	53.1	53.1
	39.8	45.7	47.7	48.6	49.2	50.4	50.9	50.9	52.1	52.3	52.3	53.1	53.1	53.4	53.4
	39.8	45.7	47.7	48.6	49.2	50.4	50.9	50.9	52.1	52.3	52.3	53.1	53.1	53.4	53.4
4000	41.0	47.1	49.2	50.1	50.9	51.9	52.4	52.4	53.6	53.8	53.8	54.6	54.6	55.0	55.0
3500	42.2	48.4	50.4	51.3	52.0	53.1	53.5	53.8	55.0	55.2	55.2	56.0	56.0	56.3	56.3
3000	44.2	51.4	54.8	55.6	56.3	57.6	58.4	58.6	59.8	59.8	59.8	60.7	60.7	61.0	61.0
2500	44.7	52.1	55.5	56.3	57.1	58.5	59.0	59.0	60.2	60.5	60.5	61.3	61.3	61.7	61.7
2000	45.1	54.8	57.5	58.3	59.0	60.7	61.2	61.2	62.4	62.7	62.7	63.5	63.5	63.9	63.9
1800	47.2	55.1	59.0	59.8	60.5	62.2	62.7	62.7	63.9	64.2	64.2	65.0	65.0	65.4	65.4
1500	47.6	55.8	59.7	60.5	61.2	62.9	63.4	63.4	64.5	64.9	64.9	65.7	65.7	66.1	66.1
1200	48.6	57.0	60.8	61.7	62.4	64.2	64.7	64.7	65.9	66.2	66.2	67.1	67.1	67.4	67.6
1000	50.1	58.5	62.4	63.2	63.9	65.7	66.2	66.2	67.4	67.7	67.7	68.6	68.6	68.9	69.1
900	52.3	60.8	64.7	65.5	66.2	68.1	68.6	68.6	69.7	70.1	70.1	70.9	70.9	71.2	71.4
800	53.1	61.8	65.7	66.9	67.6	69.4	70.1	70.1	71.3	71.6	71.6	72.4	72.4	72.7	72.9
700	55.6	62.4	66.6	71.1	71.8	73.6	74.3	74.3	75.6	76.0	76.0	77.0	77.0	77.3	77.5
600	57.8	64.6	73.1	75.3	76.0	78.7	79.7	79.7	80.8	81.3	81.3	82.4	82.4	82.9	83.2
500	60.0	71.3	76.0	78.2	79.0	82.0	83.0	83.0	84.4	84.9	84.9	85.9	85.9	86.4	86.7
400	60.0	71.3	76.0	78.2	79.2	82.2	83.2	83.2	84.5	85.0	85.0	86.1	86.1	86.6	86.9
300	60.3	71.6	76.6	79.2	80.2	83.5	84.5	84.5	85.9	86.4	86.4	87.4	87.4	87.9	88.2
200	60.3	71.8	77.1	79.7	80.7	84.5	85.5	85.5	87.2	87.7	87.7	88.7	88.7	89.2	89.5
150	60.3	71.8	77.5	80.2	81.2	85.2	86.2	86.2	87.9	88.4	88.4	89.4	89.4	89.9	90.3
100	60.3	71.8	77.5	80.3	81.3	85.7	86.7	86.7	88.4	88.9	88.9	89.9	89.9	90.4	90.9
50	60.3	71.8	77.5	80.5	81.5	85.9	86.9	86.9	88.9	89.4	89.4	90.6	90.6	91.1	91.4
0	60.3	71.8	77.5	80.8	81.8	86.2	87.2	87.2	89.2	89.7	89.7	90.9	90.9	91.4	91.8
	60.3	71.8	77.5	81.0	82.0	86.7	87.7	87.7	89.7	90.3	90.3	91.6	91.6	92.1	92.4
5000	60.3	71.8	77.5	81.3	82.5	87.6	88.9	88.9	91.4	92.1	92.1	93.8	93.8	94.3	95.5
4000	60.5	71.9	77.6	81.7	82.9	88.2	89.6	89.6	92.9	93.6	93.6	95.5	95.5	96.3	97.6
3000	60.5	71.9	77.6	81.7	82.9	88.2	89.6	89.6	92.9	93.6	93.6	95.8	95.8	96.6	98.2
2000	60.5	72.1	77.8	81.8	83.0	88.4	89.7	89.7	93.1	93.8	93.8	96.1	96.1	97.1	98.8
1000	60.5	72.1	77.8	81.8	83.0	88.4	89.7	89.7	93.1	93.8	93.8	96.1	96.1	97.1	99.0
0	60.5	72.1	77.8	81.8	83.0	88.4	89.7	89.7	93.1	93.8	93.8	96.3	96.3	97.3	100.0

TOTAL NUMBER OF OBSERVATIONS 595

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF [illegible] 51-54,56,61-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0			
NO CEILING		22.9	24.9	25.5	26.2	26.3	27.0	27.2	27.2	27.5	27.8	27.8	28.0	28.0	28.0	28.0
≥ 20000		26.4	29.1	30.0	31.2	31.3	32.2	32.5	32.5	33.0	33.3	33.3	33.4	33.4	33.5	33.5
≥ 18000		26.6	29.3	30.2	31.3	31.5	32.3	32.6	32.6	33.1	33.4	33.4	33.6	33.6	33.7	33.7
≥ 16000		26.7	29.5	30.4	31.6	31.7	32.6	33.0	33.0	33.5	33.8	33.8	34.0	34.0	34.1	34.1
≥ 14000		27.3	30.1	31.0	32.2	32.4	33.4	33.8	33.8	34.3	34.6	34.6	34.8	34.8	34.9	34.9
≥ 12000		28.5	31.4	32.5	33.8	33.9	35.0	35.4	35.4	35.9	36.2	36.2	36.4	36.4	36.5	36.5
≥ 10000		31.3	34.7	35.8	37.5	37.7	38.8	39.2	39.2	39.8	40.1	40.1	40.3	40.3	40.4	40.4
≥ 9000		32.0	36.0	37.4	39.1	39.2	40.3	40.8	40.8	41.4	41.6	41.6	42.0	42.0	42.1	42.1
≥ 8000		35.8	39.4	40.9	42.6	42.8	43.9	44.4	44.4	45.0	45.3	45.3	45.6	45.6	45.7	45.7
≥ 7000		37.2	41.1	42.5	44.4	44.5	45.6	46.1	46.1	46.7	47.0	47.0	47.5	47.5	47.5	47.5
≥ 6000		37.4	41.4	43.0	44.8	45.0	46.1	46.6	46.6	47.2	47.5	47.5	47.9	47.9	48.0	48.0
≥ 5000		38.4	42.9	44.2	46.1	46.3	47.5	48.1	48.1	48.6	48.9	48.9	49.4	49.4	49.5	49.5
≥ 4500		39.4	43.6	45.3	47.2	47.4	48.6	49.2	49.2	49.7	50.0	50.0	50.5	50.5	50.6	50.6
≥ 4000		41.1	45.9	47.5	49.4	49.6	51.0	51.5	51.5	52.1	52.4	52.4	52.8	52.8	53.1	53.1
≥ 3500		42.6	47.8	49.8	51.9	52.2	53.8	54.4	54.4	55.0	55.3	55.3	55.7	55.7	55.9	55.9
≥ 3000		45.4	51.7	54.2	56.8	57.2	59.0	59.6	59.6	60.3	60.6	60.6	61.1	61.1	61.3	61.4
≥ 2500		48.3	55.3	58.6	61.8	62.3	64.4	65.0	65.0	66.2	66.5	66.5	67.0	67.0	67.2	67.3
≥ 2000		50.0	57.2	60.9	64.6	65.1	67.4	68.1	68.1	69.4	69.7	69.7	70.1	70.1	70.3	70.4
≥ 1800		50.5	58.2	61.7	65.5	66.1	68.4	69.1	69.1	70.3	70.6	70.6	71.1	71.1	71.3	71.4
≥ 1600		51.0	59.1	63.3	67.6	68.2	71.0	71.7	71.7	73.1	73.5	73.5	74.0	74.0	74.2	74.2
≥ 1400		51.1	59.2	63.6	68.4	69.1	72.1	72.8	72.8	74.2	74.6	74.6	75.1	75.1	75.3	75.3
≥ 1200		51.1	59.2	64.0	69.5	70.4	73.7	74.5	74.5	76.3	76.7	76.7	77.3	77.3	77.7	77.7
≥ 1000		51.1	59.4	64.2	69.9	70.9	74.2	75.1	75.1	76.9	77.3	77.3	77.9	77.9	78.3	78.4
≥ 900		51.1	59.4	64.4	70.3	71.4	74.9	76.0	76.1	78.0	78.4	78.4	79.0	79.0	79.4	79.5
≥ 800		51.1	59.5	64.6	70.6	71.7	75.4	76.7	76.9	78.9	79.3	79.3	80.0	80.0	80.4	80.5
≥ 700		51.1	59.5	65.0	71.2	72.6	76.7	78.1	78.3	80.5	81.1	81.1	81.8	81.8	82.2	82.3
≥ 600		51.1	59.8	65.5	72.3	73.8	78.9	80.8	80.9	83.7	84.6	84.7	85.7	85.7	86.2	86.4
≥ 500		51.1	59.9	65.8	72.8	74.5	80.5	82.9	83.0	86.3	87.7	88.0	89.4	89.5	90.1	90.4
≥ 400		51.1	59.9	65.8	72.9	74.8	80.9	83.4	83.6	87.2	88.9	89.2	91.1	91.2	92.1	92.7
≥ 300		51.1	59.9	65.8	73.0	74.8	81.0	83.9	84.0	88.0	90.1	90.4	92.6	92.8	94.4	95.0
≥ 200		51.1	59.9	65.8	73.0	74.8	81.0	83.9	84.0	88.1	90.4	90.7	93.0	93.2	94.9	96.5
≥ 100		51.1	59.9	65.8	73.0	74.8	81.0	83.9	84.0	88.1	90.4	90.7	93.0	93.2	94.9	96.5
≥ 0		51.4	60.1	66.0	73.2	75.1	81.2	84.1	84.3	88.3	90.8	91.1	93.6	93.7	96.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1359

1

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF, KOREA/CHUNCHON 51-54,59,61-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY STATUTE MILES														
	2 1/2	2	1 3/4	1 1/2	1 1/4	1	7/8	3/4	5/8	1/2	3/8	1/4	1/8	1/16	0
NO CEILING	30.7	32.0	32.5	33.0	33.1	33.4	33.5	33.5	33.7	33.7	33.7	33.7	33.7	33.7	33.7
≥ 20000	38.4	38.1	39.1	39.7	39.8	40.2	40.4	40.4	40.5	40.5	40.5	40.5	40.6	40.5	40.5
≥ 18000	38.7	38.4	39.4	40.0	40.1	40.5	40.7	40.7	40.9	40.9	40.9	40.9	41.0	41.0	41.0
≥ 16000	38.8	38.7	39.7	40.4	40.5	41.0	41.1	41.1	41.3	41.3	41.3	41.3	41.4	41.4	41.4
≥ 14000	37.5	39.6	40.7	41.4	41.5	41.9	42.1	42.1	42.3	42.3	42.3	42.3	42.4	42.4	42.4
≥ 12000	38.7	41.2	42.2	43.1	43.2	43.6	43.7	43.8	44.0	44.0	44.0	44.0	44.1	44.1	44.1
≥ 10000	42.0	44.9	46.2	47.3	47.5	47.9	48.0	48.0	48.3	48.3	48.3	48.3	48.4	48.4	48.4
≥ 9000	42.7	45.8	47.2	48.3	48.5	48.9	49.1	49.1	49.4	49.4	49.4	49.4	49.4	49.4	49.4
≥ 8000	46.3	49.7	51.4	52.9	53.1	53.6	53.7	53.7	54.1	54.1	54.1	54.1	54.2	54.2	54.2
≥ 7000	48.3	51.9	53.7	55.3	55.5	55.9	56.1	56.1	56.5	56.5	56.5	56.5	56.5	56.5	56.5
≥ 6000	49.0	52.9	54.8	56.4	56.6	57.0	57.3	57.3	57.6	57.6	57.6	57.6	57.7	57.7	57.7
≥ 5000	49.7	53.7	55.6	57.3	57.5	57.9	58.2	58.2	58.6	58.6	58.6	58.6	58.7	58.7	58.7
≥ 4500	49.9	54.9	55.9	57.6	57.7	58.2	58.5	58.5	58.9	58.9	58.9	58.9	59.0	59.0	59.0
≥ 4000	52.0	56.0	58.1	59.9	60.1	60.5	60.9	60.9	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 3500	54.4	58.9	61.1	63.0	63.4	64.1	64.4	64.4	64.8	64.8	64.8	64.8	64.9	64.9	64.9
≥ 3000	57.2	62.4	65.0	67.5	68.1	69.0	69.4	69.4	69.9	69.9	69.9	69.9	70.0	70.0	70.0
≥ 2500	59.7	65.2	68.7	71.4	72.0	73.1	73.8	73.8	74.4	74.4	74.4	74.4	74.5	74.5	74.5
≥ 2200	61.3	66.9	70.9	74.2	74.8	76.2	76.9	76.9	77.6	77.6	77.6	77.6	77.6	77.6	77.7
≥ 2000	61.8	67.6	71.8	75.4	76.0	77.4	78.1	78.1	78.7	78.7	78.7	78.7	78.8	78.8	78.9
≥ 1800	62.4	68.5	73.1	77.4	78.2	80.4	81.1	81.1	81.9	81.9	81.9	81.9	82.0	82.0	82.1
≥ 1600	62.4	68.9	73.9	78.5	79.6	82.0	82.8	82.8	83.6	83.6	83.6	83.6	83.7	83.7	83.8
≥ 1500	62.6	69.5	75.1	81.0	82.3	84.8	85.7	85.7	86.6	86.6	86.6	86.6	86.7	86.7	86.8
≥ 1400	62.6	69.7	75.4	81.4	83.0	85.5	86.4	86.5	87.5	87.5	87.5	87.5	87.6	87.6	87.7
≥ 1300	62.7	69.7	75.6	81.8	83.5	86.3	87.2	87.4	88.5	88.5	88.5	88.5	88.6	88.6	88.6
≥ 1200	62.7	69.7	76.5	83.2	85.0	88.0	89.4	89.5	90.8	90.8	90.9	91.0	91.1	91.1	91.1
≥ 1100	62.7	69.8	76.8	83.9	86.1	89.4	91.1	91.4	92.9	93.1	93.1	93.3	93.4	93.4	93.4
≥ 1000	62.7	69.9	76.8	84.3	87.0	90.6	92.6	93.1	94.9	95.4	95.5	95.7	95.8	95.8	95.9
≥ 900	62.7	69.9	76.8	84.5	87.3	91.0	93.1	93.6	95.7	96.6	96.7	97.0	97.1	97.3	97.4
≥ 800	62.7	69.9	76.8	84.5	87.4	91.4	93.9	94.3	96.5	97.6	97.5	98.2	98.2	98.5	98.6
≥ 700	62.7	69.9	76.8	84.5	87.4	91.5	94.0	94.5	96.8	98.2	98.2	98.8	98.9	99.3	99.4
≥ 600	62.7	69.9	76.8	84.5	87.4	91.5	94.0	94.5	96.8	98.2	98.3	99.0	99.1	99.6	99.6
≥ 0	62.9	70.0	77.0	84.6	87.5	91.7	94.2	94.6	97.0	98.5	98.5	99.2	99.3	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 1355

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAPE PAGE AAF KOREA/CHI-CHI-[illegible] 51-54,57,61-71 [illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

1200-1400

CEILING (HUNDREDS OF FEET)	≥22	≥20	≥18	≥16	≥14	≥12	≥10	≥9	≥8	≥7	≥6	≥5	≥4	≥3	≥2	≥1	≥0
22+	45.8	46.0	46.3	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8
20	54.9	55.9	56.0	56.0	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2	56.2
18	55.2	56.2	56.3	56.3	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
17	55.8	56.8	57.0	57.0	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1
16	58.2	59.2	59.4	59.4	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5
15	60.2	61.2	61.4	61.4	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6
14	64.1	65.3	65.5	65.8	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
13	65.3	66.5	66.7	67.1	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2
12	69.8	71.0	71.3	71.7	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8
11	71.7	72.8	73.1	73.5	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
10	72.9	74.1	74.4	74.7	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9
9	73.5	74.7	75.0	75.4	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6
8	74.6	75.8	76.1	76.5	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6
7	77.9	79.1	79.4	79.8	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
6	81.4	82.8	83.2	83.9	84.1	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
5	85.3	87.2	88.0	89.0	89.2	89.8	89.8	89.8	89.8	89.8	89.9	89.9	89.9	89.9	89.9	89.9	89.9
4	87.7	89.9	91.1	92.3	92.5	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2	93.2
3	89.0	91.7	93.5	95.0	95.1	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
2+	89.3	92.0	93.9	95.4	95.6	96.3	96.3	96.3	96.3	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
2	89.7	92.4	94.5	96.4	96.5	97.3	97.4	97.4	97.4	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
1+	89.8	92.6	94.8	96.8	96.9	97.7	97.8	97.8	97.9	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
1	89.8	92.6	95.0	97.0	97.1	98.0	98.0	98.0	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
0+	89.8	92.6	95.0	97.0	97.1	98.0	98.0	98.0	98.2	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
0	89.8	92.6	95.0	97.4	97.6	98.4	98.6	98.6	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
M	89.8	92.6	95.1	97.6	97.8	98.9	99.2	99.2	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
M	89.8	92.6	95.1	97.7	98.0	99.2	99.4	99.4	99.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
M	89.8	92.6	95.1	97.7	98.0	99.2	99.5	99.5	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
M	89.8	92.6	95.1	97.7	98.0	99.2	99.5	99.5	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
M	89.8	92.6	95.1	97.7	98.0	99.2	99.5	99.5	99.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
M	89.8	92.6	95.2	97.8	98.0	99.3	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
M	89.9	92.6	95.2	97.8	98.0	99.3	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
M	89.9	92.6	95.2	97.8	98.0	99.3	99.5	99.5	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1330

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KUSEA/CHUCHEON 01-54,57,61-71 SEP

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1300-1700

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	0
No Ceiling		47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6	47.6
≥ 20000		57.6	57.7	57.8	57.3	57.2	57.6	57.8	57.8	57.8	57.6	57.8	57.8	57.8	57.8	57.8
≥ 15000		58.1	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 10000		58.6	58.7	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8	58.8
≥ 7000		60.1	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2	60.2
≥ 5000		61.9	62.1	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2
≥ 4000		66.5	66.8	67.1	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2
≥ 3500		68.0	68.2	68.5	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6
≥ 3000		71.8	71.8	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 2500		73.9	74.2	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5	74.5
≥ 2000		75.1	75.3	75.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 1800		76.2	76.4	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9
≥ 1500		77.6	77.8	78.2	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 1200		82.1	82.4	82.8	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0
≥ 1000		85.5	86.0	86.4	86.8	86.8	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 900		89.9	90.5	90.8	91.4	91.4	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8	91.8
≥ 800		92.0	93.4	93.8	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 700		92.8	94.5	95.3	96.3	96.3	96.6	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 600		93.2	95.1	96.1	97.1	97.1	97.5	97.5	97.5	97.5	97.6	97.6	97.6	97.6	97.6	97.6
≥ 500		93.5	95.5	96.3	97.9	97.9	98.4	98.4	98.4	98.5	98.5	98.5	98.6	98.6	98.6	98.6
≥ 400		93.5	95.5	96.6	98.2	98.2	98.6	98.6	98.6	98.7	98.8	98.8	98.8	98.8	98.8	98.8
≥ 300		93.5	95.5	96.6	98.2	98.2	98.6	98.6	98.6	98.7	98.8	98.8	98.8	98.8	98.8	98.8
≥ 200		93.5	95.5	96.6	98.2	98.2	98.7	98.7	98.7	98.8	98.8	98.8	98.9	98.9	98.9	98.9
≥ 100		93.5	95.5	96.7	98.4	98.4	98.9	98.9	98.9	99.0	99.1	99.1	99.2	99.2	99.2	99.2
0		93.5	95.5	96.7	98.5	98.5	99.2	99.2	99.2	99.2	99.3	99.3	99.4	99.4	99.4	99.4
		93.5	95.5	96.7	98.5	98.5	99.2	99.4	99.4	99.6	99.7	99.7	99.8	99.8	99.8	99.8
		93.5	95.5	96.7	98.5	98.5	99.3	99.5	99.5	99.7	99.8	99.8	99.8	99.8	99.8	99.8
		93.5	95.5	96.7	98.5	98.5	99.3	99.5	99.5	99.8	99.8	99.8	99.9	99.9	99.9	99.9
		93.5	95.5	96.7	98.5	98.5	99.3	99.5	99.5	99.8	99.8	99.8	99.9	99.9	99.9	99.9
		93.5	95.5	96.7	98.5	98.5	99.3	99.5	99.5	99.8	99.8	99.8	99.9	99.9	99.9	99.9
		93.6	95.6	96.8	98.5	98.6	99.4	99.5	99.5	99.8	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1300

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-54,56,61-62,64-66,69 (YEARS) (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1Apr-29Oct

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥⅞	≥¾	≥½	≥0
[illegible]		47.8	48.7	49.2	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6
≥ 20000		57.4	58.7	59.2	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5	59.5
≥ 10000		58.3	59.5	60.1	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4	60.4
≥ 9000		59.2	60.4	60.9	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 8000		62.7	64.3	65.1	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5
≥ 7000		64.6	66.2	67.1	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4
≥ 6000		68.0	70.1	70.9	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 5000		69.5	71.6	72.5	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 4500		72.2	74.3	75.1	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 4000		74.8	77.1	77.9	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 3500		75.5	77.8	78.6	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0
≥ 3000		76.5	78.8	79.7	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
≥ 2500		77.1	79.3	80.2	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 2000		81.8	84.1	84.9	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6	85.6
≥ 1500		84.4	86.7	87.6	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
≥ 1000		87.7	90.2	91.4	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 900		90.0	92.5	94.4	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 800		90.4	93.3	95.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 700		90.9	94.0	96.0	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 600		91.1	94.4	96.7	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.8	98.8	98.8	98.8
≥ 500		91.1	94.4	96.7	98.6	98.6	98.8	98.8	98.8	98.8	98.8	99.3	99.3	99.3	99.3
≥ 400		91.1	94.4	96.7	98.6	98.6	98.8	98.8	98.8	98.8	98.8	99.3	99.3	99.3	99.3
≥ 300		91.1	94.4	96.8	98.8	98.8	98.9	98.9	98.9	98.9	98.9	99.5	99.5	99.5	99.5
≥ 200		91.1	94.4	96.8	98.8	98.8	98.9	98.9	98.9	98.9	98.9	99.5	99.5	99.5	99.5
≥ 150		91.1	94.4	97.0	98.9	98.9	99.1	99.1	99.1	99.1	99.1	99.6	99.6	99.6	99.6
≥ 100		91.1	94.4	97.0	98.9	98.9	99.1	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8
≥ 50		91.1	94.4	97.0	98.9	98.9	99.1	99.3	99.3	99.3	99.3	99.8	99.8	99.8	99.8
≥ 0		91.1	94.4	97.0	98.9	98.9	99.1	99.3	99.3	99.3	99.3	100.0	100.0	100.0	100.0
≥ 300		91.1	94.4	97.0	98.9	98.9	99.1	99.5	99.5	99.5	99.5	99.5	100.0	100.0	100.0
≥ 200		91.1	94.4	97.0	98.9	98.9	99.1	99.5	99.5	99.5	99.5	99.5	100.0	100.0	100.0
≥ 100		91.1	94.4	97.0	98.9	98.9	99.1	99.5	99.5	99.5	99.5	99.5	100.0	100.0	100.0
≥ 0		91.1	94.4	97.0	98.9	98.9	99.1	99.5	99.5	99.5	99.5	99.5	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 571

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

49274 CAPE MAUE AAF KUREA/CHUCHEN 51-54 JAN

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	0
NO CEILING		53.3	55.3	58.1	60.6	60.6	61.4	61.7	61.7	61.7	61.9	61.9	61.9	61.9	61.9	61.9
≥ 20000		56.9	59.7	62.5	65.0	65.0	65.8	66.1	66.1	66.1	66.4	66.4	66.4	66.4	66.4	66.4
≥ 18000		57.5	60.3	63.1	65.6	65.6	66.4	66.7	66.7	66.7	66.9	66.9	66.9	66.9	66.9	66.9
≥ 16000		58.1	60.8	63.6	66.4	66.4	67.2	67.5	67.5	67.5	67.8	67.8	67.8	67.8	67.8	67.8
≥ 14000		59.4	64.4	67.2	70.0	70.0	70.8	71.1	71.1	71.1	71.4	71.4	71.4	71.4	71.4	71.4
≥ 12000		63.9	69.4	72.8	76.1	76.1	76.9	77.2	77.2	77.2	77.5	77.5	77.5	77.5	77.5	77.5
≥ 10000		66.4	73.1	76.7	80.0	80.0	80.8	81.1	81.1	81.1	81.4	81.4	81.4	81.4	81.4	81.4
≥ 9000		66.4	73.3	76.9	80.3	80.3	81.1	81.4	81.4	81.4	81.7	81.7	81.7	81.7	81.7	81.7
≥ 8000		69.4	75.9	80.6	83.9	83.9	84.7	85.0	85.0	85.0	85.3	85.3	85.3	85.3	85.3	85.3
≥ 7000		71.9	79.4	83.1	86.4	86.4	87.2	87.5	87.5	87.5	87.8	87.8	87.8	87.8	87.8	87.8
≥ 6000		71.9	79.4	83.3	86.7	86.7	87.5	87.8	87.8	87.8	88.1	88.1	88.1	88.1	88.1	88.1
≥ 5000		73.6	81.1	85.0	89.2	89.2	90.0	90.3	90.3	90.3	90.6	90.6	90.6	90.6	90.6	90.6
≥ 4500		74.2	81.7	85.6	89.7	89.7	90.6	90.8	90.8	90.8	91.1	91.1	91.1	91.1	91.1	91.1
≥ 4000		75.0	82.5	86.4	90.6	90.6	91.4	91.7	91.7	91.7	91.9	91.9	91.9	91.9	91.9	91.9
≥ 3500		75.6	83.1	86.9	91.1	91.1	91.9	92.2	92.2	92.2	92.5	92.5	92.5	92.5	92.5	92.5
≥ 3000		76.1	84.4	88.3	93.1	93.1	94.2	94.4	94.4	94.4	94.7	94.7	94.7	94.7	94.7	94.7
≥ 2500		77.8	86.7	90.6	95.3	95.3	96.4	96.7	96.7	96.7	96.9	96.9	96.9	96.9	96.9	96.9
≥ 2000		78.6	87.8	91.7	96.7	96.7	97.8	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1800		78.6	87.8	91.7	96.7	96.7	97.8	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1500		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.2	99.2	99.2	99.2
≥ 1200		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.7	99.7	99.7	99.7
≥ 1000		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.7	99.7	99.7	99.7
≥ 900		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.7	99.7	99.7	99.7
≥ 800		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.7	99.7	99.7	99.7
≥ 700		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.7	99.7	99.7	99.7
≥ 600		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.7	99.7	99.7	99.7
≥ 500		78.6	87.8	91.7	97.2	97.2	98.3	98.9	98.9	98.9	99.2	99.2	99.7	99.7	99.7	99.7
≥ 400		78.6	88.1	91.9	97.5	97.5	98.6	99.2	99.2	99.2	99.4	99.4	100.0	100.0	100.0	100.0
≥ 300		78.6	88.1	91.9	97.5	97.5	98.6	99.2	99.2	99.2	99.4	99.4	100.0	100.0	100.0	100.0
≥ 200		78.6	88.1	91.9	97.5	97.5	98.6	99.2	99.2	99.2	99.4	99.4	100.0	100.0	100.0	100.0
≥ 100		78.6	88.1	91.9	97.5	97.5	98.6	99.2	99.2	99.2	99.4	99.4	100.0	100.0	100.0	100.0
≥ 0		78.6	88.1	91.9	97.5	97.5	98.6	99.2	99.2	99.2	99.4	99.4	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 360

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

49271 CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-54 (YEARS) CT

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	0
NO CEILING		58.0	64.9	70.6	71.2	71.2	73.6	73.6	73.6	74.2	74.5	74.5	74.5	74.5	74.5	74.5
≥ 20000		59.5	69.1	75.7	76.3	76.3	78.7	78.7	78.7	79.3	79.6	79.6	79.6	79.6	79.6	79.6
≥ 18000		60.4	70.0	76.6	77.8	77.8	80.2	80.2	80.2	80.8	81.1	81.1	81.1	81.1	81.1	81.1
≥ 16000		60.4	70.0	76.6	77.8	77.8	80.2	80.2	80.2	80.8	81.1	81.1	81.1	81.1	81.1	81.1
≥ 14000		60.4	70.0	76.6	77.8	77.8	80.2	80.2	80.2	80.8	81.1	81.1	81.1	81.1	81.1	81.1
≥ 12000		61.6	71.2	77.8	79.0	79.0	81.4	81.4	81.4	82.0	82.3	82.3	82.3	82.3	82.3	82.3
≥ 10000		62.6	72.4	79.0	80.2	80.2	82.6	82.6	82.6	83.2	83.5	83.5	83.5	83.5	83.5	83.5
≥ 9500		62.8	72.7	79.3	80.5	80.5	82.9	82.9	82.9	83.5	83.8	83.8	83.8	83.8	83.8	83.8
≥ 8000		64.0	74.5	81.1	82.3	82.3	84.7	84.7	84.7	85.3	85.6	85.6	85.6	85.6	85.6	85.6
≥ 7000		64.0	74.8	81.4	83.2	83.2	85.6	85.6	85.6	86.2	86.5	86.5	86.5	86.5	86.5	86.5
≥ 6000		64.6	75.4	82.0	83.8	83.8	86.2	86.2	86.2	86.8	87.1	87.1	87.1	87.1	87.1	87.1
≥ 5000		65.2	76.6	83.2	85.0	85.0	87.4	87.4	87.4	88.0	88.3	88.3	88.3	88.3	88.3	88.3
≥ 4500		65.8	77.5	84.1	85.9	85.9	88.3	88.3	88.3	88.9	89.2	89.2	89.2	89.2	89.2	89.2
≥ 4000		67.6	82.0	88.9	90.7	90.7	93.1	93.1	93.1	93.7	94.0	94.0	94.0	94.0	94.0	94.0
≥ 3500		68.2	83.2	90.7	92.5	92.5	94.9	94.9	94.9	95.5	95.8	95.8	95.8	95.8	95.8	95.8
≥ 3000		68.8	84.1	91.6	93.4	93.4	95.8	95.8	95.8	97.3	97.6	97.6	97.6	97.6	97.6	97.6
≥ 2500		68.8	85.0	92.5	94.3	94.3	96.7	96.7	96.7	98.2	98.5	98.5	98.5	98.5	98.5	98.5
≥ 2000		68.8	85.0	92.5	94.3	94.3	96.7	96.7	96.7	98.2	98.5	98.5	98.5	98.5	98.5	98.5
≥ 1800		68.8	85.3	92.8	94.6	94.6	97.0	97.0	97.0	98.5	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1500		68.8	85.3	92.8	94.9	94.9	97.9	97.9	97.9	99.4	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1200		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		68.8	85.3	92.8	94.9	94.9	98.2	98.2	98.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 333

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 (STATION) CAMP PAGE AAF (KOREA/CHUNCHON) (STATION NAME) 51-54,60-61,63-66,69-70 (YEARS) (MONTHS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0500

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	<¼
NO CEILING		43.4	49.6	54.5	56.1	57.5	60.5	60.8	60.8	62.2	62.4	62.4	63.0	63.0	63.2	63.4
≥ 20000		45.5	53.6	59.3	61.1	62.6	65.6	66.1	66.1	67.6	67.7	67.7	68.4	68.4	68.6	68.7
≥ 18000		46.0	54.1	59.8	61.8	63.2	66.5	66.8	66.8	68.2	68.4	68.4	69.0	69.0	69.2	69.4
≥ 16000		46.4	54.5	60.1	62.1	63.5	66.8	67.1	67.1	68.6	68.7	68.7	69.4	69.4	69.5	69.7
≥ 14000		46.4	54.5	60.1	62.1	63.5	66.8	67.1	67.1	68.6	68.7	68.7	69.4	69.4	69.5	69.7
≥ 12000		47.3	55.4	61.1	63.4	64.8	68.1	68.4	68.4	69.9	70.0	70.0	70.7	70.7	70.8	71.0
≥ 10000		48.9	57.2	63.0	65.5	66.9	70.2	70.5	70.5	72.0	72.1	72.1	72.8	72.8	72.9	73.1
≥ 9000		48.9	57.2	63.5	66.0	67.4	70.7	71.0	71.0	72.4	72.6	72.5	73.3	73.3	73.4	73.6
≥ 8000		49.4	58.0	64.3	66.8	68.2	71.5	71.8	71.8	73.3	73.4	73.4	74.1	74.1	74.2	74.4
≥ 7000		49.9	59.2	65.5	68.1	69.7	72.9	73.3	73.3	74.7	74.9	74.9	75.5	75.5	75.7	75.9
≥ 6000		50.1	59.8	66.1	68.7	70.3	73.6	73.9	73.9	75.4	75.5	75.5	76.2	76.2	76.3	76.5
≥ 5000		51.1	60.8	67.3	69.9	71.5	74.7	75.0	75.0	76.5	76.7	76.7	77.3	77.3	77.5	77.6
≥ 4500		51.2	60.9	67.4	70.0	71.6	74.9	75.2	75.2	76.7	76.8	76.8	77.5	77.5	77.6	77.8
≥ 4000		52.7	62.7	69.5	72.3	73.9	77.1	77.5	77.5	78.9	79.1	79.1	79.7	79.7	79.9	80.1
≥ 3500		53.8	64.5	71.5	74.2	75.9	79.1	79.4	79.4	80.9	81.0	81.0	81.8	81.8	82.0	82.2
≥ 3000		55.6	66.6	73.6	76.7	78.4	82.2	82.5	82.5	84.1	84.3	84.3	85.1	85.1	85.3	85.4
≥ 2500		56.2	67.9	74.9	78.1	79.9	84.0	84.3	84.3	85.9	86.1	86.1	86.9	86.9	87.0	87.2
≥ 2000		56.2	67.9	74.9	78.3	80.1	84.1	84.4	84.4	86.1	86.2	86.2	87.0	87.0	87.2	87.4
≥ 1800		56.2	67.9	74.9	78.3	80.1	84.1	84.4	84.4	86.1	86.2	86.2	87.0	87.0	87.2	87.4
≥ 1500		56.4	68.2	75.4	79.3	81.0	85.3	85.6	85.6	87.4	87.5	87.5	88.3	88.3	88.5	88.7
≥ 1200		56.4	68.2	75.4	79.3	81.0	85.3	85.7	85.7	87.5	87.7	87.7	88.5	88.5	88.7	88.8
≥ 1000		56.4	68.2	75.5	79.4	81.2	85.4	85.9	85.9	87.8	88.0	88.0	88.8	88.8	89.0	89.1
≥ 900		56.4	68.2	75.5	79.4	81.2	85.4	85.9	85.9	88.0	88.2	88.2	89.0	89.0	89.1	89.3
≥ 800		56.4	68.2	75.5	79.4	81.2	85.4	86.1	86.1	88.2	88.3	88.3	89.1	89.1	89.3	89.5
≥ 700		56.4	68.2	75.5	79.4	81.2	85.4	86.1	86.1	88.2	88.3	88.3	89.1	89.1	89.3	89.5
≥ 600		56.4	68.2	75.5	79.4	81.5	85.7	86.4	86.4	88.5	88.7	88.7	89.5	89.5	89.6	89.8
≥ 500		56.4	68.2	75.5	79.4	81.7	85.9	86.5	86.5	89.0	89.1	89.1	90.1	90.1	90.6	91.1
≥ 400		56.4	68.2	75.5	79.6	81.8	86.1	86.7	86.7	89.3	89.5	89.5	90.6	90.6	91.2	91.7
≥ 300		56.4	68.2	75.5	79.6	81.8	86.1	86.7	86.9	89.5	90.0	90.0	91.9	91.9	92.7	93.2
≥ 200		56.4	68.2	75.5	79.6	81.8	86.1	86.9	87.0	89.6	90.1	90.1	92.2	92.2	93.7	94.7
≥ 100		56.4	68.2	75.5	79.6	81.8	86.1	86.9	87.0	89.6	90.1	90.1	92.7	92.7	94.3	95.9
≥ 0		56.4	68.2	75.5	79.6	81.8	86.1	86.9	87.0	89.6	90.1	90.1	92.7	92.7	94.3	100.0

TOTAL NUMBER OF OBSERVATIONS 617

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

432/1 CAMP PAGE AAF, KOREA/CHUNCHON 51-54,56,60-71 (1)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0200-0500

CEILING FEET	VISIBILITY STATUTE MILES ≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	<¼
NO CEILING		26.7	30.9	33.1	34.7	35.2	37.5	37.8	37.8	39.1	40.0	40.3	41.0	41.0	41.5	42.5
≥ 20000		28.3	33.2	35.6	37.9	38.4	40.8	41.2	41.2	43.0	43.9	44.0	45.1	45.1	46.2	46.3
≥ 18000		28.3	33.3	35.7	38.1	38.6	41.0	41.3	41.5	43.2	44.1	44.2	45.3	45.3	46.2	47.0
≥ 16000		28.5	33.5	36.0	38.3	38.9	41.3	41.7	41.7	43.5	44.4	44.5	45.6	45.6	46.5	47.3
≥ 14000		29.1	34.3	36.9	39.2	39.8	42.2	42.7	42.7	44.4	45.3	45.4	46.5	46.5	47.4	48.2
≥ 12000		29.7	35.0	37.7	40.5	41.0	43.6	44.2	44.2	46.0	46.9	47.0	48.0	48.1	48.9	49.8
≥ 10000		31.9	37.5	40.2	43.1	43.7	46.5	47.1	47.2	49.0	50.0	50.1	51.1	51.2	52.1	53.0
≥ 9000		32.3	37.9	40.7	43.8	44.4	47.2	47.7	47.8	49.7	50.7	50.8	51.8	51.9	52.8	53.7
≥ 8000		34.0	40.0	43.1	46.2	46.8	49.9	50.4	50.6	52.5	53.5	53.6	54.7	54.8	55.7	56.6
≥ 7000		34.9	41.0	44.1	47.2	47.8	50.8	51.4	51.6	53.6	54.6	54.7	55.8	55.9	56.8	57.6
≥ 6000		35.1	41.2	44.4	47.5	48.2	51.3	51.8	52.0	54.0	55.0	55.1	56.2	56.3	57.2	58.1
≥ 5000		35.7	42.2	45.4	48.6	49.4	52.5	53.0	53.2	55.2	56.2	56.3	57.4	57.5	58.4	59.3
≥ 4500		36.1	42.7	46.0	49.2	50.0	53.0	53.6	53.7	55.8	56.8	56.9	58.0	58.1	59.0	59.8
≥ 4000		37.6	44.6	47.8	51.0	51.8	54.9	55.6	55.7	57.8	58.8	58.9	60.1	60.2	61.1	61.9
≥ 3500		38.1	45.1	48.4	51.8	52.7	55.7	56.4	56.6	58.6	59.7	59.7	60.9	61.0	61.9	62.8
≥ 3000		40.5	47.5	51.2	54.7	55.6	58.8	59.5	59.7	61.8	62.9	62.9	64.1	64.2	65.2	66.0
≥ 2500		42.2	50.1	53.9	57.5	58.4	61.9	62.6	62.8	65.0	66.1	66.2	67.4	67.4	68.4	69.3
≥ 2000		42.6	50.6	54.4	58.2	59.1	62.7	63.5	63.6	66.0	67.1	67.2	68.4	68.4	69.4	70.3
≥ 1800		42.8	50.8	54.7	58.5	59.4	63.1	63.8	64.0	66.3	67.4	67.5	68.7	68.8	69.8	70.6
≥ 1500		43.1	51.1	55.2	59.5	60.4	64.2	65.0	65.1	67.4	68.6	68.7	69.9	70.0	71.0	71.8
≥ 1200		43.1	51.2	55.3	59.7	60.6	64.4	65.3	65.5	67.8	69.0	69.1	70.3	70.3	71.3	72.2
≥ 1000		43.1	51.3	55.4	60.2	61.2	65.0	66.1	66.2	68.7	70.0	70.1	71.4	71.5	72.5	73.3
≥ 900		43.1	51.3	55.4	60.2	61.2	65.0	66.1	66.2	68.8	70.1	70.2	71.6	71.7	72.7	73.5
≥ 800		43.1	51.3	55.4	60.4	61.3	65.3	66.3	66.5	69.1	70.4	70.5	72.2	72.3	73.3	74.2
≥ 700		43.1	51.3	55.5	60.6	61.5	65.7	66.8	66.9	69.6	70.9	71.0	72.7	72.8	73.8	74.6
≥ 600		43.1	51.3	55.6	60.7	61.7	65.9	67.1	67.2	69.8	71.2	71.3	73.1	73.2	74.5	75.4
≥ 500		43.1	51.4	55.7	61.1	62.4	66.5	67.8	67.9	70.7	72.2	72.3	75.0	75.1	76.7	77.6
≥ 400		43.1	51.4	55.7	61.2	62.5	66.9	68.4	68.6	72.6	74.6	74.8	78.2	78.3	80.2	81.4
≥ 300		43.1	51.4	55.7	61.2	62.5	67.0	68.5	68.9	73.2	75.6	75.8	80.4	80.6	83.6	85.1
≥ 200		43.1	51.4	55.7	61.2	62.5	67.1	68.6	69.2	73.6	76.4	76.6	81.9	82.2	86.5	88.7
≥ 100		43.1	51.4	55.7	61.2	62.5	67.1	68.6	69.2	73.6	76.4	76.6	82.6	83.3	89.3	93.1
≥ 0		43.1	51.4	55.7	61.2	62.5	67.1	68.6	69.2	73.7	76.5	76.6	82.7	83.3	89.4	100.0

TOTAL NUMBER OF OBSERVATIONS 1416

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-54,56,60-71 GT

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0100-1100

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0		
NO CEILING		32.1	34.3	35.9	36.8	37.2	38.5	39.2	39.4	39.9	40.3	40.4	40.6	40.8	40.7	40.8
≥ 20000		35.7	38.0	40.6	41.6	42.5	44.1	45.1	45.2	45.7	46.2	46.3	46.6	46.6	46.6	46.8
≥ 18000		35.8	38.8	40.9	42.1	42.7	44.3	45.3	45.4	45.9	46.4	46.5	46.8	46.8	47.0	47.0
≥ 16000		35.9	38.9	40.9	42.1	42.8	44.4	45.4	45.5	46.0	46.5	46.6	46.9	46.9	47.0	47.1
≥ 14000		36.3	39.3	41.4	42.6	43.5	45.1	46.1	46.2	46.7	47.2	47.3	47.6	47.6	47.7	47.8
≥ 12000		37.9	41.3	43.5	45.1	45.8	47.5	48.6	48.7	49.4	49.9	49.9	50.3	50.3	50.4	50.5
≥ 10000		40.2	44.3	46.6	48.3	49.1	50.8	51.9	52.0	52.7	53.2	53.3	53.7	53.7	53.8	53.9
≥ 9000		40.8	44.9	47.3	49.1	49.9	51.5	52.7	52.8	53.5	54.0	54.1	54.4	54.4	54.6	54.6
≥ 8000		42.7	47.3	49.7	51.7	52.5	54.4	55.6	55.8	56.6	57.1	57.2	57.5	57.5	57.7	57.7
≥ 7000		44.0	48.7	51.2	53.2	54.0	55.8	57.0	57.2	58.1	58.6	58.6	59.0	59.0	59.1	59.2
≥ 6000		44.3	49.4	52.0	53.9	54.8	56.6	57.6	58.0	58.9	59.4	59.4	59.8	59.8	59.9	60.0
≥ 5000		44.7	49.8	52.4	54.4	55.3	57.2	58.4	58.6	59.4	59.9	60.0	60.3	60.3	60.5	60.5
≥ 4500		45.0	50.1	52.7	54.9	55.8	57.7	58.9	59.1	59.9	60.4	60.5	60.8	60.8	61.0	61.0
≥ 4000		46.4	51.9	54.7	56.9	57.7	59.7	60.9	61.1	62.2	62.7	62.7	63.2	63.2	63.3	63.4
≥ 3500		47.8	53.3	56.1	58.3	59.1	61.2	62.4	62.6	63.6	64.1	64.2	64.6	64.6	64.8	64.9
≥ 3000		50.4	56.1	59.1	61.5	62.4	64.6	65.8	66.0	67.2	67.7	67.7	68.1	68.1	68.3	68.4
≥ 2500		52.2	57.9	61.0	63.9	64.8	67.1	68.6	68.8	70.1	70.6	70.7	71.1	71.1	71.2	71.3
≥ 2000		52.8	58.8	61.9	65.2	66.2	69.4	70.9	70.2	71.5	72.0	72.1	72.5	72.5	72.6	72.7
≥ 1800		52.9	58.9	62.0	65.3	66.3	69.6	70.1	70.3	71.7	72.2	72.2	72.6	72.6	72.6	72.9
≥ 1500		53.0	59.1	62.4	65.9	66.9	69.2	70.8	71.0	72.4	72.9	73.0	73.5	73.5	73.6	73.7
≥ 1200		53.4	59.8	63.2	66.7	67.7	70.1	71.7	71.9	73.3	73.9	74.0	74.5	74.5	74.6	74.7
≥ 1000		53.5	59.9	63.3	67.4	68.4	70.7	72.4	72.6	73.9	74.5	74.6	75.1	75.1	75.2	75.3
≥ 900		53.5	60.1	63.6	67.7	68.9	71.5	73.3	73.5	74.8	75.5	75.5	76.1	76.1	76.2	76.3
≥ 800		53.5	60.1	63.7	67.8	69.3	72.2	74.1	74.3	75.7	76.4	76.4	77.1	77.1	77.2	77.3
≥ 700		53.5	60.1	64.1	68.6	70.5	73.7	75.9	76.1	77.9	78.8	78.8	79.7	79.7	79.8	79.9
≥ 600		53.5	60.1	64.5	69.1	71.3	74.8	77.4	77.6	79.5	80.5	80.6	81.6	81.6	81.7	81.8
≥ 500		53.5	60.1	64.6	69.5	71.7	75.7	78.9	79.2	81.8	83.5	83.6	85.0	85.0	85.2	85.4
≥ 400		53.5	60.1	64.6	69.7	72.1	76.4	80.1	80.7	84.2	87.4	87.6	89.6	89.6	90.0	90.2
≥ 300		53.5	60.1	64.6	69.8	72.3	76.7	80.6	81.2	85.2	89.3	89.5	92.1	92.3	93.3	93.7
≥ 200		53.5	60.1	64.6	69.9	72.4	76.9	80.8	81.4	85.6	90.1	90.4	93.9	94.2	96.2	97.0
≥ 100		53.5	60.1	64.6	69.9	72.4	77.1	81.0	81.6	86.1	90.6	90.9	94.7	95.2	97.5	99.0
≥ 0		53.6	60.2	64.7	70.0	72.5	77.1	81.2	81.8	86.2	90.7	91.0	94.9	95.4	97.7	100.0

TOTAL NUMBER OF OBSERVATIONS 1422

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-54,58-60-71 OCT

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400

CEILING FEET	VISIBILITY STATUTE MILES ≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	0	≥0
NO CEILING	55.8	59.1	60.4	61.3	61.9	62.1	62.4	62.4	62.6	62.6	62.6	62.6	62.6	62.6
≥ 20000	63.3	67.0	68.3	69.3	69.9	70.2	70.6	70.6	70.7	70.7	70.7	70.7	70.7	70.7
≥ 15000	63.4	67.1	68.3	69.6	70.0	70.3	70.6	70.6	70.8	70.8	70.8	70.8	70.8	70.8
≥ 10000	63.7	67.3	68.6	69.9	70.3	70.6	70.9	70.9	71.1	71.1	71.1	71.1	71.1	71.1
≥ 7000	64.5	68.1	69.5	70.7	71.2	71.4	71.8	71.8	71.9	71.9	71.9	71.9	71.9	71.9
≥ 5000	66.5	70.3	71.7	73.2	73.6	74.0	74.3	74.3	74.5	74.5	74.5	74.5	74.5	74.5
≥ 3500	70.4	74.3	75.8	77.3	77.7	78.1	78.4	78.4	78.6	78.6	78.6	78.6	78.6	78.6
≥ 3000	71.5	75.5	77.0	78.4	78.8	79.2	79.6	79.6	79.8	79.8	79.8	79.8	79.8	79.8
≥ 2500	74.0	78.1	79.7	81.2	81.7	82.2	82.5	82.5	82.8	82.8	82.8	82.8	82.8	82.8
≥ 2000	74.5	78.6	80.3	81.7	82.2	82.7	83.1	83.1	83.4	83.4	83.4	83.4	83.4	83.4
≥ 1800	74.9	79.1	80.8	82.2	82.7	83.2	83.6	83.6	84.0	84.0	84.0	84.0	84.0	84.0
≥ 1500	75.9	80.2	81.9	83.4	84.0	84.5	84.8	84.8	85.2	85.2	85.2	85.2	85.2	85.2
≥ 1200	78.5	80.8	82.5	84.0	84.5	85.0	85.4	85.4	85.8	85.8	85.8	85.8	85.8	85.8
≥ 1000	79.1	83.5	85.3	87.0	87.6	88.2	88.6	88.6	89.0	89.0	89.0	89.0	89.0	89.0
≥ 900	81.7	86.3	88.1	89.7	90.4	90.9	91.4	91.4	91.7	91.7	91.7	91.7	91.7	91.7
≥ 800	85.5	90.1	92.2	93.9	94.5	95.1	95.5	95.5	95.9	95.9	95.9	95.9	95.9	95.9
≥ 700	86.6	91.5	93.7	95.4	96.0	96.6	97.1	97.1	97.4	97.4	97.4	97.4	97.4	97.4
≥ 600	86.8	91.8	94.1	95.8	96.5	97.1	97.5	97.5	97.8	97.8	97.8	97.8	97.8	97.8
≥ 500	86.8	91.8	94.1	95.8	96.5	97.1	97.5	97.5	97.8	97.8	97.8	97.8	97.8	97.8
≥ 400	87.0	91.9	94.4	96.2	96.8	97.4	97.8	97.8	98.2	98.2	98.2	98.2	98.2	98.2
≥ 300	87.1	92.0	94.5	96.3	97.0	97.6	98.0	98.0	98.3	98.3	98.3	98.3	98.3	98.3
≥ 200	87.1	92.1	94.6	96.6	97.3	97.9	98.3	98.3	98.8	98.8	98.8	98.8	98.8	98.8
≥ 100	87.1	92.1	94.6	96.6	97.3	97.9	98.3	98.3	98.8	98.8	98.8	98.8	98.8	98.8
≥ 0	87.1	92.1	94.6	96.6	97.3	98.0	98.4	98.4	98.8	98.8	98.8	98.8	98.8	98.8
≥ 700	87.1	92.1	94.6	96.6	97.4	98.1	98.6	98.7	99.2	99.2	99.2	99.2	99.2	99.2
≥ 600	87.1	92.1	94.6	96.6	97.4	98.1	98.8	98.8	99.4	99.4	99.4	99.4	99.4	99.4
≥ 500	87.1	92.1	94.7	96.8	97.6	98.3	98.9	99.0	99.6	99.6	99.6	99.6	99.6	99.6
≥ 400	87.1	92.1	94.7	96.8	97.6	98.3	98.9	99.0	99.6	99.6	99.6	99.6	99.6	99.6
≥ 300	87.1	92.1	94.7	96.8	97.6	98.3	99.0	99.1	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	87.1	92.1	94.7	96.8	97.6	98.3	99.0	99.1	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100	87.1	92.1	94.7	96.8	97.6	98.3	99.0	99.1	99.9	99.9	99.9	99.9	99.9	99.9
≥ 0	87.2	92.2	94.7	96.9	97.8	98.5	99.1	99.2	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1390

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

32/1 CAPE PAGE AAF (FORT CHURCH) 51-54,56,60-71 01

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

1100-1700

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥ 10	≥ 9	≥ 8	≥ 7	≥ 6	≥ 5	≥ 4	≥ 3	≥ 2	≥ 1½	≥ 1	≥ ¾	≥ ½	≥ ¼	< ¼
≥ 12000	61.0	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1
≥ 10000	72.5	72.7	72.8	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 9000	72.6	72.7	72.9	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0
≥ 8000	73.2	73.4	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
≥ 7000	73.8	74.0	74.1	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 6000	75.3	75.5	75.6	75.8	75.8	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9
≥ 5000	79.0	79.2	79.3	79.5	79.5	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 4500	79.5	79.6	79.8	79.9	79.9	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 4000	83.3	83.6	84.0	84.1	84.1	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2
≥ 3500	84.8	85.3	85.7	85.8	85.8	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0	86.0
≥ 3000	85.2	85.9	86.3	86.4	86.4	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6
≥ 2500	85.9	86.6	87.0	87.1	87.1	87.3	87.3	87.3	87.4	87.4	87.4	87.4	87.4	87.4	87.4
≥ 2200	87.7	87.4	87.8	88.0	88.0	88.1	88.1	88.1	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 2000	89.7	90.5	90.9	91.1	91.2	91.4	91.4	91.4	91.5	91.5	91.5	91.5	91.5	91.5	91.5
≥ 1800	92.5	93.3	93.7	93.9	94.1	94.2	94.2	94.2	94.3	94.3	94.3	94.3	94.3	94.3	94.3
≥ 1600	95.3	96.6	97.2	97.4	97.5	97.7	97.7	97.7	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1400	96.0	97.0	97.7	98.1	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1200	96.3	97.2	98.2	98.7	98.8	99.2	99.2	99.2	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1000	96.4	97.6	98.3	98.7	98.9	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 900	96.4	97.8	98.5	99.0	99.1	99.5	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 800	96.4	97.8	98.5	99.0	99.1	99.5	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 700	96.4	97.8	98.5	99.0	99.1	99.5	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 600	96.4	97.8	98.5	99.0	99.1	99.5	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 500	96.4	97.8	98.5	99.0	99.1	99.5	99.5	99.5	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 400	96.4	97.8	98.5	99.0	99.2	99.6	99.6	99.6	99.7	99.8	99.8	99.9	99.9	99.9	99.9
≥ 300	96.4	97.8	98.5	99.0	99.2	99.6	99.6	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200	96.4	97.8	98.5	99.0	99.2	99.6	99.6	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100	96.4	97.8	98.5	99.0	99.2	99.6	99.6	99.6	99.8	99.9	99.9	99.9	99.9	99.9	99.9
≥ 0	96.5	97.8	98.6	99.1	99.3	99.6	99.6	99.6	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1346

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF SUBSTA/CHUCHON 51-54,55,60-66 01

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS) 1[illegible]-2000

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	26	25	24	23	22	21	2	1	18	17	16	15	14	13	12
≥ Ceiling		62.9	64.7	65.5	66.0	66.[illegible]	66.2	66.2	66.2	66.3	66.8	66.[illegible]	66.8	66.[illegible]	66.8	66.[illegible]
≥ 20000		71.1	73.3	74.6	75.1	75.1	75.5	75.[illegible]	75.6	76.0	76.3	76.[illegible]	76.3	76.3	76.3	76.3
≥ 8000		71.3	73.5	74.8	75.3	75.3	75.6	75.[illegible]	75.6	76.1	76.5	76.5	76.5	76.5	76.5	76.5
≥ 6000		72.[illegible]	74.1	75.5	76.0	76.[illegible]	76.3	76.5	76.5	76.[illegible]	77.1	77.1	77.1	77.1	77.1	77.1
≥ 4000		72.5	74.8	76.1	76.6	76.6	76.9	77.1	77.1	77.4	77.8	77.[illegible]	77.8	77.[illegible]	77.8	77.[illegible]
≥ 2000		73.3	75.5	76.8	77.3	77.[illegible]	77.6	77.[illegible]	77.8	78.1	78.4	78.[illegible]	78.4	78.4	78.4	78.4
≥ 1000		76.8	78.9	80.3	80.8	80.[illegible]	81.1	81.3	81.3	81.6	81.9	81.[illegible]	81.9	81.9	81.9	81.9
≥ 900		76.9	79.1	80.4	80.9	80.9	81.3	81.4	81.4	81.[illegible]	82.1	82.1	82.1	82.1	82.1	82.1
≥ 800		80.4	82.6	84.1	84.6	84.6	85.1	85.4	85.4	85.[illegible]	86.1	86.1	86.1	86.1	86.1	86.1
≥ 700		81.3	83.4	85.1	85.6	85.6	86.1	86.4	86.4	86.[illegible]	87.1	87.1	87.1	87.1	87.1	87.1
≥ 600		81.6	83.7	85.4	85.9	85.9	86.4	86.7	86.7	87.1	87.4	87.4	87.4	87.4	87.4	87.4
≥ 500		82.3	84.6	86.2	86.7	86.7	87.4	87.7	87.7	88.1	88.4	88.4	88.4	88.4	88.4	88.4
≥ 450		82.9	85.2	86.9	87.4	87.4	88.1	88.4	88.4	88.7	89.1	89.1	89.1	89.1	89.1	89.1
≥ 400		84.9	87.2	88.9	89.4	89.4	90.0	90.4	90.4	90.7	91.0	91.0	91.0	91.0	91.0	91.0
≥ 350		87.7	89.7	91.9	92.4	92.4	93.2	93.5	93.5	94.0	94.4	94.4	94.4	94.4	94.4	94.4
≥ 300		89.9	92.4	94.5	95.0	95.0	95.9	96.2	96.2	96.7	97.0	97.0	97.0	97.0	97.0	97.0
≥ 250		90.5	93.2	95.4	95.9	95.9	96.7	97.0	97.0	97.5	97.8	97.8	97.8	97.8	97.8	97.8
≥ 200		91.9	93.5	95.7	96.5	96.5	97.3	97.7	97.7	98.5	98.8	98.8	99.0	99.0	99.0	99.0
≥ 180		90.9	93.5	95.7	96.5	96.5	97.3	97.7	97.7	98.5	98.8	98.8	99.0	99.0	99.0	99.0
≥ 150		90.9	93.7	95.9	96.7	96.7	97.5	97.8	97.8	98.7	99.0	99.0	99.2	99.2	99.2	99.2
≥ 120		90.9	93.7	95.9	96.7	96.7	97.5	97.8	97.8	98.7	99.0	99.0	99.2	99.2	99.2	99.2
≥ 100		90.9	93.7	95.9	96.7	96.7	97.5	97.8	97.8	98.7	99.0	99.0	99.2	99.2	99.2	99.2
≥ 90		90.9	93.7	95.9	96.7	96.7	97.5	97.8	97.8	98.7	99.0	99.0	99.2	99.2	99.2	99.2
≥ 80		90.9	93.7	95.9	96.7	96.7	97.5	97.8	97.8	98.8	99.2	99.2	99.3	99.3	99.3	99.3
≥ 70		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.0	99.7	99.7	99.8	99.8	99.8	99.8
≥ 60		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.0	99.7	99.7	99.8	99.8	99.8	99.8
≥ 50		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.2	99.8	99.8	100.0	100.0	100.0	100.0
≥ 40		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.2	99.8	99.8	100.0	100.0	100.0	100.0
≥ 30		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.2	99.8	99.8	100.0	100.0	100.0	100.0
≥ 20		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.2	99.8	99.8	100.0	100.0	100.0	100.0
≥ 10		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.2	99.8	99.8	100.0	100.0	100.0	100.0
≥ 0		90.9	93.7	95.9	96.7	96.7	97.5	98.0	98.0	99.2	99.8	99.8	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 604

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

93271 CAPE RACE AAF [illegible]/CAPE RACE 21-23

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING (FEET)	VISIBILITY (STATUTE MILES)														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	0		
NO CEILING	81.1	87.7	92.7	94.0	94.6	95.7	96.7	96.7	96.6	97.4	97.4	97.4	97.4	97.4	97.4
≥ 20000	82.0	88.9	93.5	94.2	95.2	96.1	96.4	96.4	96.3	97.2	97.2	97.2	97.2	97.2	97.2
≥ 18000	83.5	91.8	97.4	98.1	98.1	98.1	98.3	98.3	98.2	99.1	99.1	99.1	99.1	99.1	99.1
≥ 16000	83.5	91.8	97.4	98.1	98.1	98.1	98.3	98.3	98.2	99.1	99.1	99.1	99.1	99.1	99.1
≥ 14000	83.5	91.8	97.4	98.1	98.1	98.1	98.3	98.3	98.2	99.1	99.1	99.1	99.1	99.1	99.1
≥ 12000	83.8	92.1	97.7	98.4	98.4	98.4	98.6	98.6	98.5	99.4	99.4	99.4	99.4	99.4	99.4
≥ 11000	86.2	94.5	98.1	98.8	98.8	98.8	99.0	99.0	98.9	99.8	99.8	99.8	99.8	99.8	99.8
≥ 9000	86.5	92.1	98.7	99.4	99.4	99.4	99.6	99.6	99.5	100.0	100.0	100.0	100.0	100.0	100.0
≥ 8000	87.4	96.9	99.2	99.5	99.5	99.5	99.7	99.7	99.6	100.0	100.0	100.0	100.0	100.0	100.0
≥ 7000	87.7	97.2	99.8	99.5	99.5	99.5	99.7	99.7	99.6	100.0	100.0	100.0	100.0	100.0	100.0
≥ 6000	89.9	96.0	99.7	99.6	99.6	99.7	99.7	99.7	99.6	100.0	100.0	100.0	100.0	100.0	100.0
≥ 5000	90.0	99.8	99.5	99.8	99.8	99.8	99.8	99.8	99.7	100.0	100.0	100.0	100.0	100.0	100.0
≥ 4500	90.0	99.4	99.1	99.8	99.8	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 4000	91.8	99.9	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 3500	92.1	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 3000	93.0	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2500	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 2000	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1800	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1600	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1400	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1200	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
> 100	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0
= 0	94.2	99.8	99.7	99.9	99.9	99.9	99.9	99.9	99.8	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 337

DATA PROCESSING PROGRAM
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAPE PAGE AAF COREA/CHUCHON 51-54 0600-0200

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FT)	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	<¼
≥ 20000	51.5	57.0	63.7	64.6	64.8	65.7	65.9	65.9	66.1	66.3	66.5	67.4	67.4	67.4	68.1
≥ 15000	53.0	59.3	66.3	67.6	67.8	69.3	69.5	69.3	70.0	70.2	70.4	71.1	71.1	71.1	71.8
≥ 12000	53.7	60.0	67.0	68.5	68.5	70.0	70.0	70.0	70.7	70.7	71.9	71.9	71.9	71.9	72.6
≥ 10000	53.7	60.0	67.3	68.5	68.5	70.7	70.7	70.7	71.5	71.5	71.5	72.6	72.6	72.6	73.3
≥ 9000	54.1	60.7	67.7	69.3	69.3	71.5	71.5	71.5	72.2	72.2	72.2	73.3	73.3	73.3	74.1
≥ 8000	55.9	62.6	69.6	71.1	71.1	73.3	73.3	73.3	74.1	74.1	74.1	75.2	75.2	75.2	75.9
≥ 7000	56.3	63.0	70.0	71.5	71.5	73.7	73.7	73.7	74.4	74.4	74.4	75.6	75.6	75.6	76.3
≥ 6000	57.0	63.7	70.7	72.2	72.2	74.4	74.4	74.4	75.2	75.2	75.2	76.3	76.3	76.3	77.0
≥ 5000	57.8	64.4	71.5	73.0	73.0	75.2	75.2	75.2	76.3	76.3	76.3	77.4	77.4	77.4	78.1
≥ 4500	59.6	66.3	73.3	75.2	75.2	77.4	77.4	77.4	78.5	78.5	78.5	79.6	79.6	79.6	80.4
≥ 4000	61.5	68.1	75.2	77.0	77.0	79.3	79.3	79.3	80.4	80.4	80.4	81.5	81.5	81.5	82.2
≥ 3500	64.8	71.5	78.9	80.7	80.7	83.0	83.0	83.0	84.4	84.8	84.8	85.9	85.9	85.9	86.7
≥ 3000	65.2	71.9	79.3	81.1	81.1	83.3	83.3	83.3	84.8	85.2	85.2	86.3	86.3	86.3	87.0
≥ 2500	66.3	73.0	80.4	82.2	82.2	84.4	84.4	84.4	85.7	86.1	86.1	87.4	87.4	87.4	88.1
≥ 2000	67.0	74.1	81.9	83.7	83.7	85.9	85.9	85.9	87.4	88.1	88.5	89.6	89.6	89.6	90.7
≥ 1800	68.1	75.2	83.0	84.8	84.8	87.4	87.4	87.4	88.9	89.6	90.0	91.1	91.1	91.1	91.9
≥ 1600	70.4	77.4	85.6	87.4	87.4	90.0	90.0	90.0	91.5	92.2	92.6	93.7	93.7	93.7	94.4
≥ 1400	71.5	78.5	86.7	88.5	88.5	91.1	91.1	91.1	92.6	93.3	93.7	94.8	94.8	94.8	95.6
≥ 1200	72.6	79.6	87.8	89.6	89.6	92.2	92.2	92.2	93.7	94.4	94.8	96.0	96.0	96.0	96.7
≥ 1000	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 900	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 800	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 700	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 600	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 500	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 400	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 300	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 200	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 100	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	97.4
≥ 0	72.6	79.6	87.8	89.6	89.6	93.0	93.0	93.0	94.4	95.2	95.6	96.7	96.7	96.7	100.0

TOTAL NUMBER OF OBSERVATIONS 270

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

42271 CAMP PAGE AAF KUNSAN/CHUNCHON 51-54,60-61,63-66,67-72

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0500

CEILING (HUNDREDS OF FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0		
		44.1	49.7	51.[illegible]	53.0	53.4	55.2	55.7	55.7	56.6	57.5	57.9	57.9	58.3	59.9
		45.9	52.7	54.3	55.7	56.2	58.2	58.7	58.7	59.5	60.8	60.8	61.1	61.1	61.6	62.1
		46.1	50.6	53.9	55.9	56.4	58.4	58.9	58.9	59.7	61.0	61.3	61.3	61.3	62.0	63.3
		46.4	51.1	54.3	56.2	56.7	58.7	59.2	59.2	60.0	61.3	61.3	61.6	61.6	62.3	63.5
		46.4	51.1	54.3	56.2	56.7	58.7	59.2	59.2	60.0	61.5	61.5	61.8	61.8	62.5	63.8
		48.2	53.0	56.2	58.2	58.7	60.8	61.3	61.3	62.1	63.6	63.6	63.9	63.9	64.6	65.9
		49.0	53.6	57.2	59.2	59.7	61.8	62.3	62.3	63.3	64.9	64.9	65.2	65.2	65.9	67.2
		49.2	53.9	57.4	59.4	59.9	62.0	62.5	62.5	63.4	65.1	65.1	65.4	65.4	66.1	67.4
		50.2	54.9	58.4	60.3	60.8	63.1	63.6	63.6	64.8	66.4	66.4	66.7	66.7	67.4	68.7
		50.7	55.4	58.9	60.8	61.3	63.6	64.1	64.1	65.2	66.9	66.9	67.2	67.2	67.9	69.2
		51.1	56.2	59.7	61.8	62.3	64.6	65.1	65.1	66.2	67.9	67.9	68.2	68.2	68.9	70.2
		53.9	59.0	62.8	64.9	65.4	67.7	68.2	68.2	69.7	71.3	71.3	71.6	71.6	72.3	73.6
		53.9	59.0	62.8	64.9	65.4	67.7	68.2	68.2	69.7	71.3	71.3	71.6	71.6	72.3	73.6
		56.4	62.3	66.6	68.7	69.2	71.8	72.3	72.3	73.4	75.1	75.1	75.6	75.6	76.2	77.5
		58.0	64.1	68.4	70.7	71.1	73.4	73.9	73.9	75.4	77.0	77.0	77.5	77.5	78.2	79.5
		62.1	68.4	72.6	75.9	76.4	79.0	79.7	79.7	81.5	83.1	83.1	83.8	83.8	84.4	85.7
		64.9	71.3	75.7	79.2	79.7	82.3	83.0	83.0	84.9	86.6	86.6	87.2	87.2	87.9	89.2
		66.2	73.1	77.5	81.1	81.6	85.1	85.9	85.9	87.9	89.5	89.5	90.3	90.3	91.0	92.3
		66.1	73.1	77.7	81.3	82.0	85.2	86.1	86.1	88.0	89.7	89.7	90.5	90.5	91.1	92.5
		66.1	73.4	78.0	81.6	82.3	85.7	86.7	86.7	88.7	90.3	90.3	91.1	91.1	91.8	93.1
		66.1	73.6	78.2	82.0	82.6	86.1	87.0	87.0	89.0	90.7	90.7	91.5	91.5	92.1	93.4
		66.1	73.6	78.2	82.0	82.6	86.1	87.0	87.0	89.0	90.7	90.7	91.5	91.5	92.1	93.4
		66.1	73.6	78.2	82.0	82.6	86.1	87.0	87.0	89.0	90.8	90.8	91.6	91.6	92.3	93.6
		66.1	73.6	78.2	82.0	82.6	86.1	87.0	87.0	89.0	90.8	90.8	91.6	91.6	92.3	93.6
		66.1	73.6	78.2	82.0	82.6	86.1	87.0	87.0	89.0	90.8	90.8	91.6	91.6	92.3	93.6
		66.1	73.6	78.2	82.0	82.6	86.1	87.0	87.0	89.0	90.8	90.8	91.6	91.6	92.3	93.6
		66.1	73.6	78.2	82.0	82.6	86.1	87.0	87.0	89.5	91.5	91.5	92.5	92.5	93.1	94.4
		66.1	73.6	78.2	82.0	82.6	86.1	87.2	87.2	89.7	91.8	91.8	93.0	93.0	93.6	94.9
		66.1	73.6	78.2	82.0	82.6	86.1	87.2	87.2	89.7	92.0	92.0	93.3	93.3	94.1	95.6
		66.1	73.6	78.2	82.0	82.6	86.1	87.2	87.2	89.7	92.0	92.0	93.3	93.4	94.3	96.2
		66.1	73.6	78.2	82.0	82.6	86.1	87.2	87.2	89.7	92.0	92.0	93.3	93.4	94.8	97.0
		66.1	73.6	78.2	82.0	82.6	86.1	87.2	87.2	89.7	92.0	92.0	93.3	93.4	94.9	100.0

TOTAL NUMBER OF OBSERVATIONS 610

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CALE PAGE AFB [illegible] 01=54,05=71

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

0600-0800

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	25	20	15	14	13	12	11	10	9	8	7	6	5	4	3	2
≥ 25000		34.0	37.5	38.4	40.3	40.9	42.5	42.9	42.9	44.2	44.5	44.5	45.1	45.1	45.2	46.0
≥ 22000		37.3	41.3	42.8	45.1	45.7	47.4	47.8	47.8	49.4	49.7	49.7	50.3	50.4	50.4	51.2
≥ 18000		37.3	41.3	42.8	45.1	45.7	47.4	47.8	47.8	49.4	49.7	49.7	50.3	50.4	50.4	51.2
≥ 17000		37.3	41.4	42.9	45.2	45.8	47.5	47.9	47.9	49.5	49.8	49.8	50.4	50.4	50.5	51.4
≥ 16000		37.6	41.6	43.1	45.5	46.1	47.7	48.1	48.1	49.7	50.0	50.0	50.7	50.8	50.9	51.7
≥ 15000		38.6	42.0	44.3	46.7	47.2	48.9	49.3	49.3	51.0	51.2	51.3	52.0	52.0	52.1	53.0
≥ 14000		40.0	44.3	45.9	48.4	48.9	50.7	51.2	51.2	52.9	53.3	53.3	53.9	54.0	54.1	55.0
≥ 13000		40.1	44.4	46.0	48.6	49.2	50.9	51.4	51.4	53.2	53.5	53.5	54.1	54.2	54.4	55.3
≥ 12000		41.9	46.3	48.2	50.8	51.3	53.2	53.7	53.7	55.6	56.1	56.1	56.9	56.9	57.1	58.0
≥ 11000		42.6	47.1	48.9	51.5	52.0	54.0	54.5	54.5	56.4	56.9	56.9	57.8	57.9	58.1	59.0
≥ 10000		43.5	48.3	50.2	52.9	53.5	55.4	55.9	55.9	57.9	58.4	58.4	59.4	59.5	59.7	60.6
≥ 9000		44.7	49.5	51.6	54.5	55.0	56.9	57.4	57.4	59.7	60.2	60.2	61.3	61.4	61.5	62.4
≥ 8000		45.2	50.0	52.2	55.0	55.6	57.5	58.0	58.0	60.2	61.0	61.0	62.0	62.1	62.2	63.1
≥ 7000		47.6	52.9	55.5	58.6	59.4	61.6	62.1	62.1	64.4	65.3	65.3	66.4	66.5	66.7	67.6
≥ 6500		48.8	54.5	57.4	60.8	61.5	63.8	64.4	64.4	66.7	67.6	67.6	68.8	68.9	69.1	70.0
≥ 6000		52.8	58.8	62.2	66.1	66.9	69.2	70.0	70.1	72.4	73.4	73.4	74.7	74.8	74.9	75.8
≥ 5500		55.5	62.0	65.9	70.2	71.0	73.3	74.1	74.3	76.7	77.7	77.7	79.0	79.0	79.2	80.2
≥ 5000		56.1	63.0	67.2	72.0	73.0	75.5	76.4	76.6	79.2	80.2	80.2	81.5	81.6	81.8	82.7
≥ 4500		56.5	63.5	67.7	72.5	73.5	76.1	76.9	77.2	79.8	80.7	80.7	82.1	82.2	82.3	83.3
≥ 4000		56.5	63.8	68.2	73.1	74.1	76.7	77.7	77.9	80.6	81.6	81.6	83.0	83.1	83.2	84.2
≥ 3500		56.5	63.9	68.3	73.4	74.4	77.3	78.4	78.6	81.4	82.3	82.3	83.7	83.8	83.9	84.9
≥ 3000		56.5	63.9	68.3	73.7	74.6	77.6	78.7	79.0	81.7	82.7	82.7	84.0	84.1	84.3	85.3
≥ 2500		56.5	63.9	68.3	73.7	74.6	77.6	78.7	79.0	81.7	82.8	82.8	84.2	84.3	84.4	85.5
≥ 2000		56.5	63.9	68.3	73.7	74.6	77.6	78.7	79.0	81.7	82.8	82.8	84.3	84.3	84.5	85.5
≥ 1800		56.5	63.9	68.3	73.7	74.6	77.6	78.7	79.0	81.7	82.9	82.9	84.4	84.5	84.7	85.8
≥ 1700		56.5	63.9	68.3	73.7	74.6	77.6	78.8	79.0	81.8	83.0	83.0	84.6	84.7	85.0	86.0
≥ 1600		56.5	63.9	68.3	73.7	74.6	77.6	78.9	79.1	82.3	83.8	83.8	85.8	85.9	86.2	87.4
≥ 1500		56.5	63.9	68.3	73.7	74.7	77.7	79.0	79.3	82.7	84.3	84.3	86.5	86.6	87.0	88.4
≥ 1400		56.5	63.9	68.3	73.7	74.7	77.7	79.0	79.3	82.7	84.3	84.4	87.1	87.2	87.9	89.3
≥ 1300		56.5	63.9	68.3	73.8	74.8	77.8	79.1	79.4	82.8	84.8	84.9	88.0	88.3	89.2	91.2
≥ 1200		56.5	63.9	68.3	73.8	74.8	77.8	79.1	79.4	82.8	84.8	84.9	88.4	88.6	90.1	94.2
< 1200		56.5	63.9	68.3	73.8	74.8	77.8	79.1	79.4	82.8	84.8	84.9	88.4	88.7	90.2	100.0

TOTAL NUMBER OF OBSERVATIONS 1245

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KOREA)/CHUNCHON 51-54,60-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2400-1100

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1	≥1	≥¾	≥½	≥½	≥¼	≥¼	0
NO CEILING		32.7	35.3	37.9	40.0	40.4	42.1	42.4	42.4	42.8	43.4	43.4	43.9	43.9	44.3	44.3
≥ 20000		36.2	39.4	42.3	44.9	45.3	47.4	47.9	47.9	48.6	49.3	49.3	49.8	49.8	50.2	50.2
≥ 15000		36.2	39.4	42.3	44.9	45.3	47.5	48.0	48.0	48.8	49.5	49.5	50.2	50.2	50.6	50.6
≥ 10000		36.2	39.5	42.4	45.0	45.4	47.6	48.1	48.1	48.9	49.6	49.6	50.2	50.2	50.6	50.6
≥ 7000		36.5	39.7	42.7	45.3	45.7	48.0	48.5	48.5	49.4	50.1	50.1	50.7	50.7	51.1	51.1
≥ 5000		37.5	40.8	43.9	46.6	47.0	49.5	50.0	50.0	50.9	51.6	51.6	52.3	52.3	52.7	52.7
≥ 4000		39.5	42.9	46.1	49.0	49.4	52.1	52.7	52.7	53.8	54.5	54.5	55.2	55.2	55.6	55.6
≥ 3000		40.2	43.7	46.9	49.8	50.2	52.9	53.5	53.5	54.6	55.3	55.3	56.0	56.0	56.4	56.4
≥ 2500		41.9	45.6	48.9	52.2	52.8	55.3	56.0	56.0	57.5	58.4	58.4	59.0	59.0	59.5	59.5
≥ 2000		43.2	47.0	50.4	53.8	54.2	57.0	57.8	57.8	59.3	60.1	60.1	60.8	60.8	61.3	61.3
≥ 1500		43.7	47.8	51.3	54.8	55.2	58.2	59.0	59.0	60.6	61.5	61.5	62.2	62.2	62.6	62.8
≥ 1000		44.4	48.7	52.3	55.7	56.1	59.5	60.3	60.3	62.0	63.0	63.0	63.8	63.8	64.4	64.5
≥ 800		44.9	49.2	53.0	56.6	57.0	60.5	61.4	61.3	63.0	63.9	63.9	64.7	64.8	65.4	65.5
≥ 600		47.0	51.9	55.6	59.7	60.1	64.8	64.7	64.7	66.3	67.3	67.3	68.2	68.3	68.8	68.9
≥ 500		49.7	53.9	58.1	62.2	62.6	66.5	67.6	67.6	69.3	70.3	70.3	71.3	71.3	71.9	72.0
≥ 400		51.3	57.0	61.6	66.0	66.4	70.5	71.6	71.8	73.8	74.8	74.8	75.8	75.9	76.5	76.7
≥ 300		53.3	59.4	64.6	69.4	69.9	73.9	75.0	75.3	77.3	78.3	78.3	79.5	79.5	80.1	80.3
≥ 200		53.9	60.1	65.6	72.5	71.1	75.3	76.5	76.8	78.9	80.1	80.1	81.3	81.4	82.0	82.1
≥ 150		53.7	60.4	65.9	70.9	71.3	75.5	76.7	77.1	79.1	80.4	80.4	81.6	81.6	82.2	82.4
≥ 100		53.9	60.5	66.3	71.3	71.8	76.0	77.3	77.7	80.0	81.2	81.2	82.5	82.6	83.3	83.4
≥ 80		53.7	60.8	66.8	71.8	72.5	76.7	78.0	78.4	80.7	81.9	81.9	83.3	83.3	84.0	84.1
≥ 60		53.9	60.8	66.9	71.9	72.5	76.9	78.3	78.7	80.9	82.1	82.1	83.6	83.7	84.3	84.5
≥ 50		53.9	60.9	66.9	71.9	72.7	77.1	78.5	78.9	81.2	82.4	82.4	83.9	84.0	84.6	84.8
≥ 40		53.9	60.9	66.9	72.1	72.9	77.5	78.9	79.3	81.7	82.9	82.9	84.5	84.5	85.2	85.3
≥ 30		54.9	60.8	67.0	72.3	73.1	77.7	79.2	79.7	82.3	83.7	83.7	85.3	85.3	86.0	86.2
≥ 20		53.9	60.8	67.0	72.3	73.1	77.7	79.2	79.8	82.7	84.2	84.2	85.8	85.9	86.6	86.7
≥ 15		53.9	60.8	67.0	72.5	73.3	78.0	79.8	80.4	83.9	85.6	85.7	87.7	87.8	88.5	88.8
≥ 10		53.9	60.8	67.0	72.5	73.3	78.0	79.8	80.4	83.9	85.7	85.8	88.1	88.3	89.2	89.7
≥ 7		53.9	60.8	67.0	72.5	73.3	78.0	79.8	80.4	84.1	86.7	87.0	89.9	90.2	91.9	92.8
≥ 5		53.9	60.8	67.0	72.5	73.3	78.0	79.8	80.4	84.2	87.2	87.4	91.1	91.4	93.7	95.0
≥ 4		53.9	60.8	67.0	72.5	73.3	78.0	79.8	80.4	84.2	87.4	87.6	91.6	91.9	95.2	97.7
≥ 3		53.9	60.8	67.0	72.5	73.3	78.0	79.8	80.4	84.2	87.4	87.8	91.6	91.9	95.2	100.0

TOTAL NUMBER OF OBSERVATIONS 1242

USAF ETAC 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (URBA/CHUCHON) 31-50,60-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1400-1400

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥5/8	≥½	≥¼	0
NO CEILING		48.7	49.5	51.1	52.6	52.7	53.3	53.8	53.9	54.0	54.0	54.0	54.0	54.0	54.0	54.0
≥ 20000		51.7	55.3	57.5	59.3	59.4	60.1	60.8	60.8	60.9	60.9	60.9	60.9	60.9	60.9	60.9
≥ 18000		52.0	55.7	57.9	59.7	59.8	60.5	61.0	61.2	61.4	61.4	61.4	61.4	61.4	61.4	61.4
≥ 16000		52.2	56.0	58.2	60.0	60.1	60.9	61.4	61.5	61.7	61.7	61.7	61.7	61.7	61.7	61.7
≥ 14000		52.9	56.7	59.0	60.9	60.9	61.7	62.4	62.3	62.5	62.5	62.5	62.5	62.5	62.5	62.5
≥ 12000		55.6	59.5	61.8	63.7	63.9	64.7	65.4	65.3	65.5	65.5	65.5	65.5	65.5	65.5	65.5
≥ 10000		57.6	61.5	64.0	65.9	66.1	66.9	67.4	67.5	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 9000		59.2	63.1	65.6	67.5	67.6	68.5	69.0	69.2	69.4	69.4	69.4	69.4	69.4	69.4	69.4
≥ 8000		60.9	65.1	67.5	69.5	69.7	70.6	71.1	71.3	71.4	71.5	71.5	71.6	71.6	71.6	71.6
≥ 7000		62.3	66.5	69.0	71.1	71.3	72.3	72.9	73.1	73.2	73.3	73.3	73.4	73.4	73.4	73.4
≥ 6000		62.9	67.1	69.7	72.0	72.3	73.3	73.9	74.1	74.3	74.4	74.4	74.5	74.5	74.5	74.5
≥ 5000		64.4	68.6	71.2	73.5	73.7	74.8	75.5	75.6	75.9	76.0	76.0	76.1	76.1	76.1	76.1
≥ 4500		65.2	69.4	72.4	74.7	75.1	76.2	77.0	77.1	77.4	77.5	77.5	77.5	77.5	77.5	77.5
≥ 4000		67.5	72.0	75.2	77.9	78.4	79.5	80.3	80.5	80.8	80.8	80.8	80.9	81.0	81.0	81.0
≥ 3500		69.2	73.7	77.0	79.6	80.1	81.3	82.1	82.2	82.5	82.6	82.6	82.7	82.7	82.7	82.7
≥ 3000		72.3	77.4	80.8	83.9	84.5	86.0	86.8	87.0	87.4	87.5	87.5	87.6	87.7	87.7	87.7
≥ 2500		74.1	79.4	83.2	86.6	87.2	88.8	89.6	89.8	90.2	90.4	90.4	90.8	90.9	90.9	90.9
≥ 2000		75.1	80.7	84.7	88.3	88.9	90.6	91.4	91.6	92.0	92.2	92.2	92.6	92.7	92.7	92.7
≥ 1800		75.1	80.8	84.8	88.4	89.3	90.9	91.7	91.9	92.3	92.6	92.6	92.9	93.0	93.0	93.0
≥ 1500		75.2	80.9	85.1	88.9	89.7	91.6	92.6	92.7	93.1	93.5	93.5	93.8	93.9	93.9	93.9
≥ 1200		75.6	81.6	85.7	89.6	90.4	92.3	93.4	93.6	94.0	94.3	94.3	94.6	94.7	94.7	94.7
≥ 1000		75.6	81.7	85.8	89.9	90.8	92.7	93.9	94.1	94.5	94.8	94.8	95.2	95.3	95.3	95.3
≥ 900		75.6	81.7	85.8	89.9	90.8	92.7	93.9	94.1	94.5	94.8	94.8	95.2	95.3	95.3	95.3
≥ 800		75.6	81.7	85.9	90.1	90.9	93.1	94.4	94.5	95.0	95.3	95.3	95.7	95.8	95.8	95.8
≥ 700		75.6	81.7	85.9	90.2	91.1	93.6	95.0	95.1	95.6	96.0	96.0	96.4	96.5	96.5	96.5
≥ 600		75.6	81.7	85.9	90.2	91.2	93.6	95.1	95.3	96.0	96.4	96.4	96.8	96.9	96.9	96.9
≥ 500		75.6	81.7	85.9	90.2	91.2	93.7	95.5	95.6	96.4	97.0	97.0	97.7	97.8	97.8	97.8
≥ 400		75.6	81.7	85.9	90.2	91.2	93.7	95.6	95.9	96.8	98.2	98.2	98.9	99.0	99.0	99.0
≥ 300		75.6	81.7	85.9	90.2	91.2	93.7	95.6	95.9	96.8	98.5	98.5	99.4	99.5	99.5	99.5
≥ 200		75.6	81.7	85.9	90.2	91.2	93.7	95.6	95.9	96.8	98.8	98.8	99.8	99.9	99.9	99.9
≥ 100		75.6	81.7	85.9	90.2	91.2	93.7	95.6	95.9	96.8	98.8	98.8	99.9	100.0	100.0	100.0
≥ 0		75.6	81.7	85.9	90.2	91.2	93.7	95.6	95.9	96.8	98.8	98.8	99.9	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1211

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE ARB AURE, CH (CPU) 51-54, 60-71 NOV

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS) 1200-1700

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	2½	2	1½	1¼	1	¾	½	¼	0	½	1	2	3	4	5	10
22000	56.4	58.0	58.1	58.9	58.9	58.9	59.1	59.1	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2
20000	61.7	63.0	63.9	64.0	64.5	64.6	64.7	64.8	64.9	64.9	64.9	64.9	64.9	64.9	64.9	64.9
18000	62.2	64.2	64.6	65.3	65.3	65.3	65.4	65.4	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6
17000	62.4	64.4	64.8	65.4	65.4	65.4	65.6	65.6	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
16000	62.9	64.9	65.3	65.9	65.9	65.9	66.1	66.1	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
15000	64.5	66.7	67.1	67.8	67.8	67.8	67.9	67.9	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
14000	67.5	69.8	70.3	71.1	71.1	71.2	71.4	71.4	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5
13000	68.4	70.7	71.2	72.0	72.0	72.1	72.3	72.3	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
12000	70.9	73.5	74.1	75.0	75.0	75.0	75.2	75.2	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4
11000	72.3	75.1	75.8	76.6	76.6	76.7	76.9	77.0	77.1	77.1	77.1	77.1	77.1	77.1	77.1	77.1
10000	73.6	76.5	77.2	78.3	78.3	78.5	78.6	78.7	79.1	79.2	79.2	79.2	79.2	79.2	79.2	79.2
9000	75.6	78.5	79.3	80.4	80.4	80.6	80.7	80.8	81.2	81.3	81.3	81.3	81.3	81.3	81.3	81.3
8000	77.0	79.9	80.7	81.8	81.8	82.0	82.1	82.2	82.6	82.7	82.7	82.7	82.7	82.7	82.7	82.7
7000	79.4	82.6	83.4	84.6	84.6	84.7	84.9	85.0	85.4	85.5	85.5	85.6	85.6	85.6	85.6	85.6
6000	80.9	84.2	85.1	86.2	86.3	86.5	86.6	86.7	87.1	87.2	87.2	87.3	87.3	87.3	87.3	87.3
5000	84.8	88.5	89.4	90.6	91.0	91.2	91.3	91.4	92.0	92.1	92.1	92.2	92.2	92.2	92.2	92.2
4500	86.5	90.3	91.6	92.5	93.9	94.1	94.2	94.3	94.9	95.0	95.0	95.2	95.2	95.2	95.2	95.2
4000	86.8	90.8	92.2	94.2	94.7	95.2	95.4	95.5	96.2	96.3	96.3	96.7	96.7	96.7	96.7	96.7
3500	86.8	90.9	92.3	94.4	95.0	95.4	95.7	95.7	96.5	96.6	96.6	96.9	96.9	96.9	96.9	96.9
3000	87.0	91.2	92.7	94.7	95.4	95.8	96.1	96.2	97.0	97.1	97.1	97.4	97.4	97.4	97.4	97.4
2900	87.1	91.3	92.9	95.0	95.7	96.2	96.4	96.5	97.3	97.4	97.4	97.7	97.7	97.7	97.7	97.7
2800	87.2	91.4	93.0	95.1	95.8	96.7	97.0	97.1	98.0	98.1	98.1	98.4	98.4	98.7	98.7	98.7
2700	87.2	91.4	93.0	95.2	96.0	96.8	97.2	97.2	98.2	98.2	98.2	98.6	98.6	98.8	98.8	98.8
2600	87.2	91.4	93.0	95.2	96.0	96.8	97.2	97.2	98.2	98.4	98.4	98.7	98.7	99.0	99.0	99.0
2500	87.2	91.4	93.0	95.2	96.1	96.9	97.4	97.5	98.6	98.7	98.7	99.2	99.2	99.4	99.4	99.4
2400	87.2	91.4	93.0	95.2	96.1	96.9	97.4	97.5	98.7	99.0	99.0	99.4	99.4	99.7	99.7	99.7
2300	87.2	91.4	93.0	95.2	96.1	96.9	97.4	97.5	98.8	99.2	99.2	99.6	99.6	99.8	99.8	99.8
2200	87.2	91.4	93.0	95.2	96.1	96.9	97.5	97.6	98.9	99.3	99.3	99.7	99.7	100.0	100.0	100.0
2100	87.2	91.4	93.0	95.2	96.1	96.9	97.5	97.6	98.9	99.3	99.3	99.7	99.7	100.0	100.0	100.0
2000	87.2	91.4	93.0	95.2	96.1	96.9	97.5	97.6	98.9	99.3	99.3	99.7	99.7	100.0	100.0	100.0
1900	87.2	91.4	93.0	95.2	96.1	96.9	97.5	97.6	98.9	99.3	99.3	99.7	99.7	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 1198

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43277 CAMP PAGE AAF KOREA/CHUNCHON 51-54,60-66

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1 JAN-2000

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	0
NO CEILING	56.5	57.3	60.1	60.3	60.3	60.6	60.6	60.6	60.6	60.8	60.8	61.2	61.2	61.2	61.2
≥ 20000	58.8	62.3	63.1	63.6	63.6	64.6	64.6	64.6	65.3	65.5	65.5	65.9	65.9	65.9	65.9
≥ 18000	58.9	62.5	63.2	63.8	63.8	64.7	64.7	64.7	65.5	65.7	65.7	66.0	66.0	66.0	66.0
≥ 16000	59.0	62.5	63.2	63.8	63.8	64.7	64.7	64.7	65.5	65.7	65.7	66.0	66.0	66.0	66.0
≥ 14000	59.7	63.2	64.7	64.7	64.7	65.7	65.7	65.7	66.8	67.0	67.0	67.4	67.4	67.4	67.4
≥ 12000	60.4	64.0	65.5	66.0	66.0	67.0	67.0	67.0	68.1	68.3	68.3	68.7	68.7	68.7	68.7
≥ 10000	62.5	66.6	67.9	68.7	68.7	69.6	69.6	69.6	70.9	71.1	71.1	71.5	71.5	71.5	71.5
≥ 9000	64.2	68.5	69.6	70.3	70.3	71.3	71.3	71.3	72.6	72.8	72.8	73.1	73.1	73.1	73.1
≥ 8000	65.3	69.8	70.9	71.6	71.6	72.6	72.6	72.6	73.9	74.1	74.1	74.4	74.4	74.4	74.4
≥ 7000	67.4	72.4	73.5	74.3	74.3	75.2	75.2	75.2	76.5	76.7	76.7	77.2	77.2	77.2	77.2
≥ 6000	68.8	74.1	75.6	76.3	76.3	77.2	77.2	77.2	78.5	78.7	78.7	79.3	79.3	79.3	79.3
≥ 5000	71.5	76.7	78.4	79.1	79.1	80.0	80.0	80.0	81.5	81.7	81.7	82.3	82.3	82.3	82.3
≥ 4500	71.8	77.2	78.9	79.7	79.7	80.6	80.6	80.6	82.1	82.3	82.3	82.8	82.8	82.8	82.8
≥ 4000	74.1	79.9	81.7	82.5	82.5	83.4	83.4	83.4	84.9	85.1	85.1	85.8	85.8	85.8	85.8
≥ 3500	76.1	82.1	84.1	84.9	85.1	86.0	86.0	86.0	87.5	87.7	87.7	88.4	88.4	88.4	88.4
≥ 3000	78.7	84.9	86.9	87.7	87.9	88.8	88.8	88.8	90.5	90.9	90.9	92.2	92.2	92.4	92.4
≥ 2500	80.8	87.1	89.4	90.5	90.7	91.6	91.6	91.6	93.3	93.7	93.7	95.0	95.0	95.1	95.1
≥ 2000	81.0	87.3	90.3	91.4	91.6	92.5	92.5	92.5	94.2	94.6	94.6	96.1	96.1	96.3	96.3
≥ 1800	81.0	87.3	90.7	91.8	92.0	92.9	92.9	92.9	94.6	95.0	95.0	96.5	96.5	96.6	96.6
≥ 1500	81.0	87.3	90.7	91.8	92.0	93.5	93.5	93.5	95.1	95.5	95.5	97.0	97.0	97.2	97.2
≥ 1200	81.0	87.3	90.7	91.8	92.0	93.5	93.5	93.5	95.1	95.5	95.5	97.2	97.2	97.4	97.4
≥ 1000	81.0	87.5	90.9	92.0	92.2	93.7	93.7	93.7	95.5	95.9	95.9	97.6	97.6	97.8	97.8
≥ 900	81.0	87.5	90.9	92.2	92.4	94.0	94.0	94.0	95.9	96.3	96.3	97.9	97.9	98.1	98.1
≥ 800	81.0	87.5	90.9	92.2	92.4	94.0	94.0	94.0	95.9	96.3	96.3	98.1	98.1	98.7	98.7
≥ 700	81.0	87.5	90.9	92.2	92.4	94.0	94.0	94.0	95.9	96.3	96.3	98.1	98.1	98.7	98.7
≥ 600	81.0	87.5	90.9	92.2	92.4	94.2	94.2	94.2	96.1	96.5	96.5	98.5	98.5	99.1	99.1
≥ 500	81.0	87.5	90.9	92.2	92.4	94.2	94.2	94.2	96.1	96.5	96.5	98.7	98.7	99.3	99.3
≥ 400	81.0	87.5	90.9	92.2	92.4	94.2	94.2	94.2	96.1	96.5	96.5	99.1	99.1	99.6	99.6
≥ 300	81.0	87.5	90.9	92.2	92.4	94.2	94.2	94.2	96.1	96.5	96.5	99.3	99.3	99.8	99.8
≥ 200	81.0	87.5	90.9	92.2	92.4	94.2	94.2	94.2	96.1	96.5	96.5	99.3	99.3	99.8	99.8
≥ 100	81.0	87.5	90.9	92.2	92.4	94.2	94.2	94.2	96.1	96.5	96.5	99.3	99.3	99.8	99.8
≥ 0	81.0	87.5	90.9	92.2	92.4	94.2	94.2	94.2	96.1	96.5	96.5	99.3	99.3	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 536

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF (KEA/CHUCHON) 51-54

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-0300

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	¾	½	¼	0	
≥ 20000		59.5	63.0	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	68.1
≥ 20000		60.0	64.4	69.6	71.1	71.1	71.1	71.1	71.1	72.2	72.2	72.2	72.2	72.2	72.2	73.0
≥ 18000		60.0	64.4	69.6	71.1	71.1	71.1	71.1	71.1	72.2	72.2	72.2	72.2	72.2	72.2	73.0
≥ 15000		60.0	64.4	69.6	71.1	71.1	71.1	71.1	71.1	72.2	72.2	72.2	72.2	72.2	72.2	73.0
≥ 14000		61.5	66.7	72.2	73.7	73.7	73.7	73.7	73.7	74.8	74.8	74.8	74.8	74.8	74.8	75.5
≥ 12000		62.6	67.8	73.3	74.8	74.8	74.8	74.8	74.8	75.9	75.9	75.9	75.9	75.9	75.9	76.7
≥ 10000		63.0	68.1	73.7	75.2	75.2	75.2	75.2	75.2	76.3	76.3	76.3	76.3	76.3	76.3	77.0
≥ 9000		63.0	68.1	73.7	75.2	75.2	75.2	75.2	75.2	76.3	76.3	76.3	76.3	76.3	76.3	77.0
≥ 8000		65.6	70.7	76.3	77.8	77.8	78.1	78.1	78.1	79.3	79.3	79.3	79.3	79.3	79.3	80.0
≥ 7000		66.3	71.5	77.0	78.5	78.5	78.9	78.9	78.9	80.0	80.0	80.0	80.0	80.0	80.0	80.7
≥ 6000		67.0	72.2	77.8	79.3	79.3	79.6	79.6	79.6	80.7	80.7	80.7	81.1	81.1	81.9	82.6
≥ 5000		71.1	76.3	81.9	83.3	83.3	83.7	83.7	83.7	84.8	84.8	84.8	85.6	85.6	86.3	87.0
≥ 4500		71.5	76.7	82.2	83.7	83.7	84.1	84.1	84.1	85.2	85.2	85.2	85.9	85.9	86.7	87.4
≥ 4000		74.4	79.6	85.2	86.7	86.7	87.0	87.0	87.0	88.1	88.1	88.1	89.3	89.3	90.4	90.7
≥ 3500		75.9	81.1	86.7	88.1	88.1	88.5	88.5	88.5	89.6	89.6	89.6	90.7	90.7	91.5	92.2
≥ 3000		76.3	81.5	87.0	88.5	88.5	89.6	89.6	89.6	91.9	91.9	91.9	93.0	93.0	93.7	94.4
≥ 2500		77.8	83.0	88.5	90.0	90.0	91.1	91.1	91.1	93.3	93.3	93.3	94.4	94.4	95.2	95.9
≥ 2000		78.1	83.3	88.9	90.7	90.7	91.9	91.9	91.9	94.4	94.8	94.8	95.9	95.9	96.7	97.4
≥ 1800		78.9	84.1	89.6	91.5	91.5	92.6	92.6	92.6	95.2	95.6	95.6	96.7	96.7	97.4	98.1
≥ 1500		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.0	97.0	97.4	98.5
≥ 1200		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.0	97.0	97.8	98.5
≥ 1000		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.0	97.0	97.8	98.5
≥ 900		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.0	97.0	97.8	98.5
≥ 800		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.4	97.4	98.1	98.9
≥ 700		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.4	97.4	98.1	98.9
≥ 600		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.4	97.4	98.1	98.9
≥ 500		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.8	97.8	98.5	99.3
≥ 400		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.8	97.8	98.5	99.3
≥ 300		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	97.8	97.8	98.5	99.3
≥ 200		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	98.1	98.1	99.3	100.0
≥ 100		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	98.1	98.1	99.3	100.0
≥ 0		78.9	84.1	89.6	91.5	91.5	93.0	93.0	93.0	95.6	95.9	95.9	98.1	98.1	99.3	100.0

TOTAL NUMBER OF OBSERVATIONS 270

1 USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-53

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2	≥1	≥1	≥	≥	≥	≥	≥	≥	
[illegible]		47.9	51.7	57.1	57.1	57.1	57.5	58.8	58.8	61.3	61.3	61.3	61.3	61.3	61.3
[illegible]		47.9	51.7	58.3	59.2	59.2	59.6	60.4	60.8	63.3	63.3	63.3	63.3	63.3	63.3
[illegible]		49.2	52.9	59.6	60.4	60.4	60.8	62.1	62.1	64.6	64.6	64.6	64.6	64.6	64.6
[illegible]		49.6	53.3	60.0	60.8	60.8	61.3	62.5	62.5	65.0	65.0	65.0	65.0	65.0	65.0
[illegible]		52.1	55.8	62.5	63.3	63.3	63.8	65.0	65.0	67.5	67.5	67.5	67.5	67.5	67.5
[illegible]		53.3	57.1	63.8	64.6	64.6	65.0	66.3	66.3	68.8	68.8	68.8	68.8	68.8	68.8
[illegible]		53.3	57.1	63.8	64.6	64.6	65.8	67.1	67.1	69.6	69.6	69.6	69.6	69.6	69.6
[illegible]		53.3	57.1	63.8	64.6	64.6	65.8	67.1	67.1	69.6	69.6	69.6	69.6	69.6	69.6
[illegible]		53.3	57.1	63.8	64.6	64.6	65.8	67.1	67.1	70.0	70.0	70.0	70.0	70.0	70.0
[illegible]		55.4	59.6	66.3	67.1	67.1	68.3	69.2	69.6	72.5	72.5	72.5	72.5	72.5	72.5
[illegible]		55.4	59.6	66.3	67.1	67.1	68.3	69.2	69.6	72.5	72.5	72.5	72.5	72.5	72.5
[illegible]		57.5	61.7	69.6	70.4	70.4	71.7	72.9	72.9	75.8	75.8	75.8	76.3	76.3	76.3
[illegible]		57.9	61.7	70.0	70.8	70.8	72.1	73.3	73.3	76.3	76.3	76.3	76.7	77.1	77.1
[illegible]		62.9	67.1	75.8	77.1	77.1	78.3	79.6	79.6	83.8	83.8	83.8	84.2	84.6	84.6
[illegible]		64.2	70.0	79.2	80.4	80.4	81.7	82.9	82.9	87.1	87.1	87.1	87.5	87.9	87.9
[illegible]		65.4	71.7	80.8	82.1	82.1	83.8	85.0	85.0	89.6	89.6	89.6	90.8	91.3	91.3
[illegible]		67.5	73.8	82.9	85.0	85.0	86.7	87.9	87.9	92.5	92.5	92.5	93.8	94.2	94.2
[illegible]		67.5	73.8	82.9	85.4	85.4	87.1	88.3	88.3	92.9	93.8	93.8	95.0	95.4	95.4
[illegible]		67.9	73.8	82.9	85.4	85.4	87.1	88.3	88.3	92.9	93.8	93.8	95.0	95.4	95.4
[illegible]		67.5	74.2	83.8	86.3	86.3	87.9	89.2	89.2	93.8	95.0	95.0	96.3	96.7	96.7
[illegible]		67.9	75.0	84.6	87.1	87.1	88.8	90.0	90.0	95.0	96.3	96.3	97.5	97.9	97.9
[illegible]		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	95.4	96.7	96.7	97.9	98.3	98.3
[illegible]		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	95.4	96.7	96.7	97.9	98.3	98.3
[illegible]		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	95.4	96.7	96.7	97.9	98.3	98.3
[illegible]		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	95.4	96.7	96.7	97.9	98.3	98.3
≥ 500		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	96.3	97.5	97.5	99.6	100.0	100.0
≥ 400		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	96.3	97.5	97.5	99.6	100.0	100.0
≥ 300		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	96.3	97.5	97.5	99.6	100.0	100.0
≥ 200		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	96.3	97.5	97.5	99.6	100.0	100.0
≥ 100		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	96.3	97.5	97.5	99.6	100.0	100.0
≥ 0		67.9	75.4	85.0	87.5	87.5	89.2	90.4	90.4	96.3	97.5	97.5	99.6	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 240

1
2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF, KOREA/CHUCHON 51-53,60-61,63-66,69-70 [illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-0500

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥2	≥1½	≥1	≥¾	≥½	≥¼	≥0	[illegible]	[illegible]	[illegible]
[illegible]		52.5	56.6	59.9	61.1	61.2	63.4	64.4	64.4	65.3	65.5	65.5	65.6	65.6	65.7	65.9
[illegible]		53.5	57.6	61.1	62.2	62.4	64.7	65.7	65.7	66.8	67.0	67.0	67.3	67.3	67.3	67.3
≥ 8000		54.1	58.3	61.7	62.9	63.0	65.3	66.3	66.3	67.5	67.7	67.7	68.0	68.0	68.0	68.0
≥ 7000		54.3	58.4	61.9	63.0	63.2	65.5	66.5	66.5	67.7	67.8	67.8	68.2	68.2	68.2	68.2
≥ 6000		54.6	58.7	62.2	63.4	63.5	65.8	66.8	66.8	68.0	68.2	68.2	68.5	68.5	68.5	68.5
≥ 5000		55.3	59.4	63.0	64.2	64.4	66.7	67.7	67.7	68.8	69.0	69.0	69.3	69.3	69.3	69.3
≥ 4500		55.8	59.9	63.7	64.9	65.0	67.3	68.3	68.3	69.5	69.6	69.6	70.0	70.0	70.0	70.0
≥ 4000		55.8	59.9	63.7	64.9	65.0	67.3	68.3	68.3	69.5	69.6	69.6	70.0	70.0	70.0	70.0
≥ 3500		56.6	60.9	65.5	66.7	66.8	69.1	70.3	70.3	71.5	71.6	71.6	71.9	71.9	71.9	71.9
≥ 3000		57.4	61.9	66.5	67.6	68.0	70.3	71.5	71.5	72.6	72.8	72.8	73.1	73.1	73.1	73.1
≥ 2500		58.1	62.5	67.2	68.5	68.6	71.0	72.1	72.1	73.3	73.4	73.4	73.8	73.8	73.8	73.8
≥ 2000		59.1	63.9	69.0	70.3	70.5	72.8	73.9	73.9	75.1	75.2	75.2	75.6	75.6	75.6	75.6
≥ 1800		59.9	65.0	70.3	71.6	71.8	74.1	75.2	75.2	76.4	76.7	76.7	77.2	77.4	77.4	77.4
≥ 1500		61.2	66.8	72.1	73.8	73.9	76.2	77.4	77.4	78.9	79.2	79.2	79.7	79.9	79.9	79.9
≥ 1200		61.9	68.3	73.6	75.6	75.7	78.4	79.5	79.5	81.5	81.8	81.8	82.3	82.5	82.5	82.5
≥ 1000		64.2	71.5	76.9	79.5	79.9	83.2	84.3	84.3	86.3	87.0	87.0	88.0	88.1	88.1	88.1
≥ 900		65.0	73.9	79.5	83.3	83.7	87.0	88.1	88.1	90.4	91.1	91.1	92.1	92.2	92.2	92.2
≥ 800		67.8	75.7	81.5	85.6	86.0	89.3	90.4	90.4	93.1	93.9	93.9	94.9	95.0	95.0	95.0
≥ 700		67.8	75.7	81.5	85.6	86.0	89.3	90.4	90.4	93.1	94.1	94.1	95.0	95.2	95.2	95.2
≥ 600		68.0	75.9	81.8	86.1	86.5	89.8	90.9	90.9	93.6	94.6	94.6	95.5	95.7	95.7	95.7
≥ 500		68.2	76.1	82.0	86.3	86.6	89.9	91.7	91.7	94.4	95.4	95.4	96.4	96.5	96.5	96.5
≥ 400		68.2	76.1	82.0	86.3	86.6	89.9	91.7	91.7	94.4	95.5	95.5	96.5	96.7	96.7	96.7
≥ 300		68.2	76.1	82.0	86.3	86.6	89.9	91.7	91.7	94.4	95.5	95.5	96.5	96.7	96.7	96.7
≥ 200		68.2	76.1	82.0	86.3	86.6	89.9	91.7	91.7	94.4	95.7	95.7	96.7	96.9	96.9	96.9
≥ 100		68.2	76.1	82.0	86.3	86.6	89.9	91.7	91.7	94.4	95.7	95.7	96.7	96.9	96.9	96.9
≥ 0		68.2	76.1	82.0	86.3	86.6	89.9	91.7	91.7	94.4	95.7	95.7	96.7	96.9	96.9	96.9
≥ 300		68.2	76.2	82.2	86.5	86.8	90.1	91.9	91.9	94.6	95.9	95.9	96.9	97.0	97.0	97.0
≥ 200		68.2	76.2	82.2	86.5	86.8	90.1	91.9	91.9	94.6	96.2	96.2	97.2	97.4	97.4	97.4
≥ 100		68.2	76.2	82.2	86.5	86.8	90.1	91.9	91.9	94.6	96.2	96.2	97.2	97.4	97.4	97.4
≥ 0		68.2	76.2	82.2	86.5	86.8	90.1	91.9	91.9	94.6	96.2	96.2	97.2	97.4	97.4	98.3
		68.2	76.2	82.2	86.5	86.8	90.1	91.9	91.9	94.6	96.2	96.2	97.2	97.4	97.4	100.0

TOTAL NUMBER OF OBSERVATIONS 606

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF K[illegible]/CHUCHON 01-53,04-71

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0200-0300

CEILING (FEET)	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2	≥1	≥1	≥1	≥1	≥1	≥1	≥15/16	≥1	≥0
NO CEILING		45.7	50.6	52.3	54.7	55.4	56.6	57.4	57.4	58.2	58.5	58.5	59.0	59.1	59.2	59.6
≥ 25000		46.8	51.9	53.9	56.5	57.3	58.8	59.6	59.6	60.7	61.0	61.0	61.6	61.8	61.9	62.2
≥ 20000		46.8	52.1	54.1	56.7	57.5	59.0	59.8	59.9	61.0	61.2	61.2	61.8	62.0	62.2	62.4
≥ 15000		46.8	52.1	54.1	56.7	57.5	59.0	59.8	59.9	61.0	61.2	61.2	61.8	62.0	62.2	62.4
≥ 12000		46.9	52.2	54.2	56.8	57.6	59.1	59.9	60.0	61.0	61.3	61.3	61.9	62.1	62.4	62.5
≥ 10000		47.2	52.7	54.7	57.3	58.1	59.6	60.5	60.7	61.7	62.0	62.0	62.6	62.8	63.1	63.2
≥ 9000		47.9	53.6	55.9	58.7	59.5	61.0	61.9	62.0	63.0	63.3	63.3	64.0	64.1	64.3	64.5
≥ 8000		48.1	53.7	56.1	58.8	59.6	61.1	62.1	62.2	63.2	63.5	63.5	64.1	64.3	64.5	64.7
≥ 7000		48.8	54.7	57.4	60.3	61.1	62.7	63.7	63.8	64.8	65.2	65.2	65.9	66.0	66.2	66.4
≥ 6000		49.4	55.8	58.6	61.7	62.6	64.1	65.2	65.2	66.3	66.6	66.7	67.3	67.5	67.6	67.8
≥ 5000		49.9	56.2	59.1	62.2	63.2	64.6	65.6	65.7	66.7	67.1	67.1	67.8	67.9	68.1	68.3
≥ 4500		50.7	57.3	60.2	63.4	64.3	66.0	67.0	67.1	68.1	68.4	68.5	69.1	69.3	69.4	69.7
≥ 4000		51.2	58.1	61.1	64.5	65.2	67.0	68.0	68.1	69.1	69.4	69.5	70.2	70.4	70.5	70.8
≥ 3500		52.3	59.0	63.0	66.6	67.7	69.4	70.5	70.5	71.6	72.0	72.0	72.7	72.9	73.1	73.3
≥ 3000		53.6	61.8	65.2	69.7	70.5	72.4	73.5	73.6	74.9	75.2	75.3	76.2	76.4	76.5	76.8
≥ 2500		57.5	66.7	70.6	75.8	76.6	78.8	80.2	80.4	81.8	82.5	82.5	83.6	83.7	84.1	84.2
≥ 2000		58.7	68.4	72.5	78.8	79.7	82.0	84.3	84.5	86.2	87.0	87.0	88.2	88.4	88.5	88.9
≥ 1800		59.8	69.7	73.9	80.5	81.4	84.6	86.3	86.6	88.5	89.3	89.4	90.6	90.8	91.0	91.2
≥ 1500		59.8	69.7	74.0	80.8	81.7	84.9	86.7	86.9	88.9	89.7	89.7	90.9	91.1	91.3	91.5
≥ 1200		60.0	70.1	74.4	81.3	82.1	85.5	87.4	87.4	89.5	90.3	90.4	91.5	91.7	91.9	92.2
≥ 1000		60.2	70.2	74.6	81.4	82.3	85.6	87.5	87.8	89.9	90.8	90.9	92.1	92.3	92.5	92.7
≥ 900		60.2	70.2	74.6	81.4	82.3	85.6	87.5	87.8	90.2	91.2	91.3	92.5	92.7	92.9	93.1
≥ 800		60.2	70.2	74.6	81.4	82.3	85.6	87.5	87.8	90.2	91.2	91.3	92.5	92.7	92.9	93.1
≥ 700		60.2	70.2	74.6	81.4	82.3	85.6	87.5	87.8	90.2	91.2	91.3	92.6	92.7	93.0	93.2
≥ 600		60.2	70.2	74.6	81.4	82.3	85.6	87.5	87.8	90.2	91.2	91.3	92.6	92.7	93.0	93.2
≥ 500		60.2	70.2	74.6	81.4	82.3	85.6	87.5	87.8	90.2	91.3	91.4	92.7	92.9	93.3	93.5
≥ 400		60.2	70.2	74.7	81.6	82.5	85.8	87.7	87.9	90.4	91.5	91.7	93.0	93.2	93.6	94.1
≥ 300		60.2	70.2	74.7	81.6	82.5	85.8	87.7	87.9	90.4	91.6	91.8	93.1	93.4	93.9	94.2
≥ 200		60.2	70.2	74.7	81.6	82.5	85.8	87.7	87.9	90.4	91.9	92.1	93.8	94.0	94.6	95.2
≥ 100		60.2	70.2	74.7	81.6	82.5	85.8	87.7	87.9	90.5	91.9	92.2	93.9	94.2	94.9	96.4
≥ 0		60.4	70.5	75.0	81.8	82.7	86.0	87.9	88.2	90.8	92.2	92.4	94.2	94.4	95.2	100.0

TOTAL NUMBER OF OBSERVATIONS 1266

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF CHINA/CHANGCHUN 51-53, 60-71 [illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2	≥1½	≥1	≥¾	≥½	≥¼	<¼	2510	[illegible]	[illegible]	
[illegible]		35.3	40.5	43.5	47.5	48.8	50.5	51.1	51.1	52.2	53.2	53.3	53.9	54.5	54.6	54.7
[illegible]		37.5	42.9	46.1	50.0	52.2	54.2	54.9	54.9	56.3	57.5	57.5	58.3	58.3	58.9	59.1
≥ 1800		37.6	42.9	46.1	50.0	52.2	54.2	54.9	54.9	56.3	57.5	57.5	58.3	58.3	58.9	59.1
≥ 1500		37.6	42.9	46.1	50.0	52.2	54.2	54.9	54.9	56.4	57.6	57.6	58.4	58.5	59.1	59.2
≥ 1200		38.1	43.7	47.0	51.5	53.1	55.1	55.9	55.9	57.4	58.7	58.7	59.5	59.6	60.1	60.3
≥ 1000		38.5	44.1	47.4	52.1	53.7	55.8	56.6	56.6	58.2	59.5	59.5	60.3	60.4	60.8	61.1
≥ 900		39.0	45.0	48.5	53.5	55.1	57.3	58.2	58.2	59.8	61.1	61.1	61.9	62.0	62.6	62.8
≥ 800		39.5	45.5	49.0	54.0	55.6	57.9	58.8	58.8	60.4	61.7	61.7	62.5	62.6	63.2	63.4
≥ 700		40.1	46.5	50.4	56.1	57.9	60.1	61.2	61.3	63.0	64.3	64.4	65.1	65.2	65.8	66.0
≥ 600		40.8	47.6	51.7	57.7	59.6	62.0	63.2	63.2	65.0	66.3	66.3	67.2	67.3	67.9	68.1
≥ 500		41.1	48.2	52.3	58.4	60.4	62.8	64.0	64.2	66.1	67.3	67.3	68.2	68.3	68.9	69.1
≥ 400		41.3	48.6	52.7	58.8	60.8	63.6	64.9	64.9	66.9	68.3	68.3	69.2	69.3	69.9	70.1
≥ 300		41.7	49.0	53.1	59.2	61.2	64.0	65.4	65.6	67.6	69.0	69.1	69.9	70.0	70.6	70.8
≥ 200		43.9	51.7	56.1	62.4	64.6	67.5	69.0	69.2	71.2	72.6	72.6	73.5	73.6	74.2	74.4
≥ 100		44.7	52.8	57.4	64.1	66.4	69.3	70.9	71.2	73.3	74.9	74.9	75.9	76.0	76.5	76.8
≥ 0		47.5	56.4	61.5	69.1	71.4	74.9	77.0	77.3	79.9	81.5	81.5	82.8	82.9	83.5	83.9
≥ 2500		48.7	57.9	63.3	71.0	74.2	77.7	79.9	80.2	83.0	84.9	84.9	86.3	86.6	87.3	87.6
≥ 2000		49.5	58.9	64.7	73.2	75.9	79.5	81.9	82.2	85.4	87.7	87.7	89.3	89.4	90.3	90.4
≥ 1800		49.6	59.1	64.8	73.4	76.1	79.7	82.0	82.3	85.6	87.9	87.9	89.5	89.6	90.4	90.6
≥ 1500		49.8	59.5	65.3	73.9	76.7	80.3	82.7	83.1	86.6	88.9	88.9	90.6	90.7	91.7	91.9
≥ 1200		49.8	59.5	65.3	73.9	76.7	80.3	82.9	83.2	86.8	89.2	89.2	90.9	90.9	92.0	92.1
≥ 1000		49.8	59.5	65.3	73.9	76.7	80.3	82.9	83.3	86.8	89.3	89.3	91.0	91.1	92.1	92.4
≥ 900		49.8	59.5	65.3	73.9	76.7	80.3	82.9	83.3	86.8	89.4	89.4	91.1	91.2	92.2	92.5
≥ 800		49.8	59.5	65.3	73.9	76.7	80.5	83.1	83.6	87.2	89.8	89.8	91.5	91.6	92.6	92.9
≥ 700		49.8	59.5	65.3	73.9	76.7	80.7	83.5	84.0	87.6	90.3	90.3	92.1	92.1	93.2	93.4
≥ 600		49.8	59.5	65.3	73.9	76.9	81.0	83.7	84.3	87.9	90.5	90.5	92.3	92.4	93.4	93.7
≥ 500		49.8	59.5	65.3	73.9	76.9	81.0	83.7	84.3	88.0	90.9	90.9	92.9	93.0	94.1	94.3
≥ 400		49.8	59.5	65.3	73.9	76.9	81.0	83.7	84.3	88.0	91.0	91.1	93.1	93.2	94.3	94.5
≥ 300		49.8	59.5	65.3	73.9	76.9	81.0	83.7	84.3	88.0	91.1	91.2	93.3	93.3	94.4	94.9
≥ 200		49.8	59.5	65.3	73.9	76.9	81.0	83.7	84.3	88.1	91.2	91.3	94.1	94.1	95.7	96.1
≥ 100		49.8	59.5	65.3	73.9	76.9	81.0	83.7	84.3	88.1	91.2	91.3	94.2	94.3	96.5	97.4
≥ 0		49.8	59.6	65.4	74.0	77.0	81.1	83.8	84.3	88.2	91.3	91.3	94.3	94.4	96.6	100.0

TOTAL NUMBER OF OBSERVATIONS 1246

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

49271 CAPE PAGE AAF ALASKA/CHUGACH 01-53,60-71 CC

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1200-1400

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1¼	≥1	≥¾	≥5/16	≥¼	0
NO CEILING	48.4	51.9	55.7	56.7	57.2	58.2	58.7	58.7	59.0	59.2	59.2	59.2	59.3	59.4	59.4
≥20000	51.8	55.7	60.0	61.3	61.9	63.1	63.6	63.6	64.1	64.3	64.3	64.4	64.5	64.6	64.6
≥ 9000	51.8	55.7	61.0	61.3	61.9	63.1	63.5	63.6	64.1	64.3	64.3	64.4	64.9	64.6	64.6
≥ 5000	52.0	55.8	60.2	61.5	62.1	63.2	63.8	63.9	64.3	64.6	64.6	64.6	64.7	64.8	64.8
≥ 3000	52.5	56.5	60.9	62.2	62.7	63.9	64.5	64.5	65.0	65.2	65.2	65.3	65.4	65.5	65.5
≥ 2000	53.0	57.1	61.4	63.2	63.8	65.0	65.5	65.5	66.2	66.3	66.3	66.4	66.4	66.5	66.5
≥ 1500	54.4	58.8	63.1	65.1	65.8	67.0	67.7	67.7	68.2	68.4	68.4	68.5	68.6	68.7	68.7
≥ 1000	54.7	59.0	63.7	65.5	66.1	67.4	68.0	68.0	68.5	68.8	68.8	68.8	68.9	69.0	69.0
≥ 800	55.8	60.6	65.6	67.6	68.4	69.7	70.4	70.4	70.9	71.1	71.1	71.2	71.3	71.4	71.4
≥ 600	56.6	61.7	67.0	69.4	70.1	71.3	72.0	72.0	72.5	72.8	72.8	72.9	72.9	73.0	73.0
≥ 500	56.6	62.1	67.8	69.9	70.6	71.9	72.6	72.6	73.1	73.4	73.4	73.4	73.5	73.6	73.6
≥ 400	57.7	63.2	68.8	71.3	72.1	73.5	74.3	74.3	74.8	75.0	75.0	75.2	75.3	75.4	75.4
≥ 300	58.5	63.9	69.5	72.2	73.1	74.5	75.2	75.2	75.7	76.0	76.0	76.2	76.3	76.4	76.4
≥ 200	60.9	66.9	72.3	75.7	76.6	78.0	78.8	78.8	79.3	79.6	79.6	79.9	79.9	80.0	80.0
≥ 150	62.7	68.8	75.0	78.4	79.4	80.8	81.5	81.5	82.0	82.3	82.3	82.6	82.6	82.7	82.7
≥ 100	65.8	72.1	78.8	82.8	84.0	85.7	86.4	86.4	87.0	87.3	87.3	87.6	87.7	87.8	87.8
≥ 50	67.0	74.0	81.3	85.5	87.0	88.8	89.6	89.6	90.7	91.0	91.0	91.5	91.6	91.9	91.9
≥ 0	67.6	75.2	83.1	87.4	89.0	91.0	92.0	92.0	93.1	93.5	93.5	94.0	94.1	94.3	94.3
≥ 1800	67.8	75.4	83.3	87.7	89.3	91.4	92.4	92.4	93.4	93.8	93.8	94.3	94.4	94.7	94.7
≥ 1500	68.1	75.7	83.6	88.2	89.8	92.2	93.3	93.3	94.3	94.7	94.7	95.2	95.3	95.6	95.6
≥ 1200	68.1	75.7	83.6	88.3	89.9	92.3	93.3	93.3	94.4	94.8	94.8	95.3	95.4	95.8	95.8
≥ 1000	68.1	75.7	83.6	88.4	90.0	92.4	93.4	93.4	94.5	94.9	94.9	95.4	95.5	95.9	95.8
≥ 900	68.1	75.7	83.6	88.4	90.0	92.4	93.5	93.6	94.7	95.1	95.1	95.6	95.6	96.0	96.0
≥ 800	68.1	75.7	83.6	88.4	90.0	92.4	93.6	93.7	94.7	95.1	95.1	95.6	95.7	96.1	96.1
≥ 700	68.1	75.7	83.6	88.6	90.1	92.6	93.8	93.9	95.1	95.6	95.6	96.3	96.4	96.7	96.7
≥ 600	68.1	75.7	83.6	88.6	90.1	92.8	94.0	94.2	95.3	95.8	95.8	96.5	96.6	97.0	97.0
≥ 500	68.1	75.7	83.6	88.6	90.1	92.8	94.0	94.2	95.4	96.1	96.1	97.0	97.1	97.5	97.5
≥ 400	68.1	75.7	83.6	88.6	90.1	92.8	94.0	94.3	95.6	96.3	96.3	97.3	97.4	97.9	97.9
≥ 300	68.1	75.7	83.6	88.6	90.1	92.9	94.1	94.4	95.7	96.5	96.5	97.8	97.9	98.4	98.4
≥ 200	68.1	75.7	83.6	88.6	90.1	92.9	94.1	94.4	95.8	96.6	96.7	98.3	98.4	99.3	99.3
≥ 100	68.1	75.7	83.6	88.6	90.1	92.9	94.1	94.4	95.8	96.6	96.7	98.4	98.5	99.6	99.7
≥ 0	68.1	75.7	83.6	88.6	90.1	92.9	94.1	94.4	95.8	96.6	96.7	98.4	98.5	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 1216

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

2

43271 CAMP PAGE AAF KOREA/CHUNCHEON 51-53,60-71 (50)

PERCENTAGE FREQUENCY OF OCCURRENCE
FROM HOURLY OBSERVATIONS

1100-1700

CEILING FEET	VISIBILITY STATUTE MILES ≥10	≥6	≥5	≥4	≥3	≥2	≥1	≥	≥	≥	≥	≥	≥	≥	≥	≥
NO CEILING		56.0	56.2	59.7	60.2	60.2	60.5	60.5	60.5	60.5	60.6	60.6	60.6	60.6	60.6	60.7
≥ 25000		60.2	63.1	65.1	65.6	65.6	65.9	65.9	66.0	66.0	66.1	66.1	66.1	66.1	66.1	66.1
≥ 18000		60.5	64.4	65.4	65.9	65.9	66.2	66.2	66.2	66.3	66.4	66.4	66.4	66.4	66.4	66.4
≥ 17000		60.7	64.6	65.6	66.1	66.1	66.4	66.4	66.4	66.5	66.6	66.6	66.6	66.6	66.6	66.6
≥ 14000		61.1	64.0	66.0	66.5	66.5	66.8	66.8	66.8	66.9	67.0	67.0	67.0	67.0	67.0	67.0
≥ 12000		61.9	64.8	66.8	67.3	67.3	67.6	67.6	67.6	67.7	67.8	67.8	67.8	67.8	67.8	67.8
≥ 10000		64.9	66.8	68.9	69.5	69.5	69.8	69.8	69.8	69.9	70.0	70.0	70.0	70.0	70.0	70.0
≥ 9000		64.2	67.1	69.1	69.7	69.7	70.1	70.1	70.1	70.2	70.2	70.2	70.2	70.2	70.2	70.2
≥ 8000		65.2	68.5	70.7	71.3	71.3	71.8	71.9	71.9	71.9	72.0	72.0	72.0	72.0	72.0	72.0
≥ 7000		65.9	69.4	71.8	72.4	72.4	72.9	73.0	73.0	73.0	73.2	73.2	73.2	73.2	73.2	73.2
≥ 6000		66.3	69.8	72.2	72.8	72.8	73.5	73.6	73.6	73.7	73.9	73.9	73.9	73.9	73.9	73.9
≥ 5000		67.7	71.3	73.7	74.5	74.5	75.2	75.3	75.3	75.4	75.6	75.6	75.6	75.6	75.6	75.6
≥ 4500		68.5	72.2	74.6	75.3	75.3	76.0	76.2	76.2	76.3	76.4	76.4	76.4	76.4	76.4	76.4
≥ 4000		72.7	76.5	79.0	79.9	79.9	80.6	80.8	80.8	80.9	81.0	81.0	81.0	81.0	81.0	81.0
≥ 3500		76.3	80.1	83.4	84.7	84.7	85.5	85.6	85.6	85.7	85.9	85.9	85.9	85.9	85.9	85.9
≥ 3000		79.3	83.8	87.6	89.4	89.4	90.2	90.4	90.4	90.8	91.0	91.0	91.0	91.0	91.0	91.0
≥ 2500		80.8	85.5	89.5	91.9	92.3	93.6	93.8	93.8	94.4	94.6	94.6	94.6	94.6	94.6	94.6
≥ 2000		81.6	86.6	90.8	93.6	94.1	95.7	96.0	96.0	96.6	97.0	97.0	97.0	97.0	97.0	97.0
≥ 1800		81.6	86.6	90.8	93.6	94.1	95.8	96.1	96.1	96.7	97.1	97.1	97.1	97.1	97.1	97.1
≥ 1500		81.6	86.8	91.2	94.1	94.7	96.5	96.9	96.9	97.4	98.1	98.1	98.2	98.2	98.2	98.2
≥ 1200		81.6	86.5	91.2	94.1	94.7	96.5	96.9	96.9	97.6	98.3	98.4	98.5	98.5	98.5	98.5
≥ 1000		81.6	86.6	91.2	94.1	94.7	96.6	96.9	96.9	97.7	98.4	98.4	98.6	98.6	98.6	98.6
≥ 900		81.6	86.8	91.2	94.1	94.7	96.6	96.9	96.9	97.7	98.4	98.4	98.6	98.6	98.6	98.6
≥ 800		81.6	86.6	91.2	94.1	94.7	96.6	96.9	96.9	97.7	98.4	98.4	98.6	98.6	98.6	98.6
≥ 700		81.6	86.8	91.2	94.1	94.7	96.6	96.9	96.9	97.7	98.4	98.4	98.6	98.6	98.6	98.6
≥ 600		81.6	86.8	91.2	94.1	94.7	96.8	97.1	97.1	97.9	98.6	98.6	98.7	98.7	98.7	98.7
≥ 500		81.6	86.8	91.2	94.1	94.7	96.8	97.1	97.1	97.9	98.7	98.7	99.1	99.1	99.1	99.1
≥ 400		81.6	86.8	91.2	94.1	94.7	96.8	97.1	97.1	97.9	98.8	98.8	99.2	99.2	99.2	99.2
≥ 300		81.6	86.8	91.2	94.1	94.7	96.8	97.1	97.1	97.9	98.8	98.8	99.3	99.3	99.3	99.3
≥ 200		81.6	86.8	91.2	94.1	94.7	96.8	97.1	97.1	97.9	98.8	98.8	99.7	99.7	99.8	99.8
≥ 100		81.6	86.8	91.2	94.1	94.7	96.8	97.1	97.1	97.9	98.8	98.8	99.7	99.7	99.8	99.8
≥ 0		81.6	86.8	91.2	94.1	94.7	96.8	97.1	97.1	97.9	98.8	98.8	99.7	99.7	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 1176

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF [illegible]/CHUCHON 51-53,00-66 [illegible]

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS) 1[illegible]-2[illegible]

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	6	5	4	3	2½	2	1¾	1½	1¼	1	¾	½	¼	0	
NO CEILING	54.4	56.2	58.4	59.9	59.9	61.0	61.1	61.1	62.2	62.6	62.9	63.4	63.5	63.7	63.7	
≥ 20000	55.1	58.0	61.0	62.6	62.6	63.7	63.9	63.9	65.4	65.7	65.9	66.7	66.8	67.0	67.0	
≥ 15000	55.4	58.9	61.3	63.0	63.0	64.1	64.3	64.3	65.7	66.3	66.5	67.0	67.2	67.4	67.4	
≥ 12000	55.5	59.1	61.5	63.2	63.2	64.3	64.5	64.5	65.9	66.5	66.8	67.2	67.4	67.6	67.6	
≥ 10000	55.6	59.3	61.7	63.4	63.4	64.5	64.6	64.6	66.1	66.7	66.7	67.4	67.6	67.8	67.8	
≥ 9000	57.3	61.1	63.7	65.4	65.4	66.5	66.7	66.7	68.3	68.9	68.9	69.6	69.8	70.0	70.0	
≥ 8000	58.4	62.2	64.8	66.5	66.5	67.6	67.8	67.8	69.4	70.0	70.0	70.7	70.9	71.1	71.1	
≥ 7000	58.6	62.4	65.0	66.7	66.7	67.8	68.0	68.0	69.6	70.2	70.2	70.9	71.1	71.3	71.3	
≥ 6000	58.6	62.6	65.4	67.0	67.0	68.1	68.3	68.5	70.2	70.9	70.9	71.6	71.9	72.0	72.0	
≥ 5000	59.9	64.4	66.1	67.8	67.8	68.9	69.2	69.2	70.9	71.3	71.3	72.0	72.2	72.4	72.4	
≥ 4500	59.1	63.5	66.3	68.0	68.0	69.1	69.3	69.8	71.5	72.4	72.4	73.1	73.3	73.5	73.5	
≥ 4000	60.2	64.6	67.4	69.2	69.2	70.7	71.5	71.5	73.1	74.0	74.0	74.8	75.0	75.1	75.1	
≥ 3500	61.0	65.6	68.3	70.2	70.2	71.6	72.4	72.4	74.0	75.0	75.0	75.7	75.9	76.1	76.1	
≥ 3000	65.9	70.5	73.3	75.1	75.1	77.0	77.9	77.9	79.6	81.0	81.0	81.8	82.0	82.1	82.1	
≥ 2500	67.8	73.7	76.8	78.6	78.6	80.6	81.8	81.8	83.4	84.9	84.9	85.6	85.8	86.0	86.0	
≥ 2000	70.5	76.4	79.7	82.5	82.5	84.7	85.6	85.6	87.5	89.0	89.0	89.9	90.1	90.2	90.2	
≥ 1800	70.9	77.3	81.8	84.7	84.9	87.7	88.8	88.8	90.8	92.3	92.3	93.2	93.4	93.6	93.6	
≥ 1600	71.3	78.8	83.2	86.4	86.7	89.9	91.2	91.2	93.2	94.7	94.7	95.6	95.8	95.9	95.9	
≥ 1400	71.3	79.2	83.6	86.7	87.1	90.2	91.7	91.7	93.7	95.2	95.2	96.1	96.3	96.5	96.5	
≥ 1200	71.3	79.2	83.6	86.7	87.1	90.8	92.4	92.4	94.7	96.3	96.3	97.2	97.4	97.6	97.6	
≥ 1000	71.3	79.2	83.6	86.7	87.1	90.8	92.4	92.4	94.7	96.3	96.3	97.2	97.4	97.6	97.6	
≥ 900	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.0	98.2	98.2	
≥ 800	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.0	98.2	98.2	
≥ 700	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.2	98.3	98.3	
≥ 600	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.2	98.3	98.3	
≥ 500	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.3	98.5	98.9	
≥ 400	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.3	98.5	98.9	
≥ 300	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.3	98.5	98.9	
≥ 200	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.3	98.5	98.9	
≥ 100	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.3	98.5	98.9	
≥ 0	71.3	79.2	83.6	86.7	87.1	91.0	92.6	92.6	95.2	96.9	96.9	97.8	98.3	98.5	100.0	

TOTAL NUMBER OF OBSERVATIONS 343

DATA PROCESSING PROGRAM
USAF ETAC
AIR WEATHER SERVICE/MAC

2

CEILING VERSUS VISIBILITY

43271 CAMP PAGE AAF KUNSAN/COMPOSITE (STATION NAME) 51-53 (YEARS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

2100-2300

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	6	5	4	3	2	1	½	¼	⅛	0					
NO CEILING		56.5	59.0	62.3	65.7	65.7	65.7	66.9	66.9	67.2	68.6	68.6	72.0	72.0	72.0	72.0
≥ 20000		57.7	60.2	63.3	66.2	66.2	66.2	69.5	69.5	70.7	71.1	71.1	74.5	74.5	74.2	74.5
≥ 18000		58.6	61.1	64.1	67.0	67.0	67.0	70.3	70.3	71.5	72.0	72.0	75.3	75.3	75.3	75.3
≥ 16000		58.6	61.1	64.1	67.0	67.0	67.0	70.3	70.3	71.5	72.0	72.0	75.3	75.3	75.3	75.3
≥ 14000		59.0	61.5	64.5	67.5	67.5	67.5	70.7	70.7	72.0	72.4	72.4	75.7	75.7	75.7	75.7
≥ 12000		60.7	63.2	66.2	69.1	69.1	69.5	72.8	72.8	74.1	74.5	74.5	77.8	77.8	77.8	77.8
≥ 10000		60.7	63.2	66.2	69.1	69.1	69.5	72.8	72.8	74.1	74.5	74.5	77.8	77.8	77.8	77.8
≥ 9000		60.7	63.2	66.2	69.1	69.1	69.5	72.8	72.8	74.1	74.5	74.5	77.8	77.8	77.8	77.8
≥ 8000		60.7	63.2	66.2	69.1	69.1	69.5	72.8	72.8	74.9	75.3	75.3	78.7	78.7	78.7	78.7
≥ 7000		61.5	64.0	67.0	70.0	70.0	70.4	73.6	73.6	75.7	76.2	76.2	79.5	79.5	79.5	79.5
≥ 6000		61.9	64.4	67.5	70.4	70.4	70.8	74.1	74.1	76.2	76.6	76.6	79.9	79.9	79.9	79.9
≥ 5000		64.0	66.5	69.5	72.4	72.4	72.8	76.0	76.0	78.1	78.5	78.5	81.8	81.8	81.8	81.8
≥ 4500		64.4	66.9	69.9	72.8	72.8	73.2	76.4	76.4	78.5	78.9	78.9	82.3	82.3	82.3	82.3
≥ 4000		69.0	71.5	74.7	77.7	77.7	78.1	81.4	81.4	83.5	83.9	83.9	87.2	87.2	87.2	87.2
≥ 3500		69.9	72.4	75.5	78.6	78.6	79.0	82.3	82.3	84.5	84.9	84.9	88.3	88.3	88.3	88.3
≥ 3000		71.1	73.6	76.8	79.9	79.9	80.3	83.6	83.6	85.8	86.2	86.2	89.5	89.5	89.5	89.5
≥ 2500		72.4	74.9	78.1	81.2	81.2	81.6	84.9	84.9	87.1	87.4	87.4	90.8	90.8	90.8	90.8
≥ 2000		72.4	74.9	78.1	81.2	81.2	81.6	84.9	84.9	87.1	87.4	87.4	90.8	90.8	90.8	90.8
≥ 1800		72.4	74.9	78.1	81.2	81.2	81.6	84.9	84.9	87.1	87.4	87.4	90.8	90.8	90.8	90.8
≥ 1500		72.4	76.2	79.5	82.6	82.6	83.0	86.2	86.2	88.4	88.8	88.8	92.1	92.1	92.1	92.1
≥ 1200		72.4	77.4	80.8	84.0	84.0	84.4	87.7	87.7	89.9	90.3	90.3	93.6	93.6	93.6	93.6
≥ 1000		72.4	77.4	80.8	84.0	84.0	84.4	87.7	87.7	89.9	90.3	90.3	93.6	93.6	93.6	93.6
≥ 900		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	95.0	95.4	95.4	98.7	98.7	98.7	98.7
≥ 800		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	95.0	95.4	95.4	98.7	98.7	98.7	98.7
≥ 700		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	95.0	95.4	95.4	98.7	98.7	98.7	98.7
≥ 600		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	95.0	95.4	95.4	98.7	98.7	98.7	98.7
≥ 500		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	96.2	96.7	96.7	100.0	100.0	100.0	100.0
≥ 400		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	96.2	96.7	96.7	100.0	100.0	100.0	100.0
≥ 300		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	96.2	96.7	96.7	100.0	100.0	100.0	100.0
≥ 200		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	96.2	96.7	96.7	100.0	100.0	100.0	100.0
≥ 100		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	96.2	96.7	96.7	100.0	100.0	100.0	100.0
≥ 0		72.4	77.4	84.5	89.1	89.1	90.0	91.2	91.2	96.2	96.7	96.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 239

SKY COVER SUMMARY

Due to the reporting of total cloud amount in GWC tapes for airways hourly observations Jan 71 and later; clear, scattered, broken, overcast, partial and obscured are converted to 0, 3, 9, 10, 9 and 10 tenths. The sky cover summary for this station is limited to the period of record through Dec 70.

PART D SKY COVER

This summary is prepared from hourly observations and is a percentage frequency distribution of total sky cover by tenths, plus mean sky cover, and total number of observations. It is presented in two tables as follows:

1. By month and annual - all hours and all years combined.

2. By month - by standard 3-hour groups.

NOTE: # 1: Sky cover (total cloud amount) was not reported by U. S. Services until mid 1945. Data, when available, were punched for Air Force stations beginning in 1946, but were not available for Navy stations until 1948 or 1949. Weather Bureau stations recorded total cloud amount in remarks beginning sometime in 1945, but few stations have punched data prior to 1948. This summary will, of course, be limited to period of available data.

NOTE: # 2: Some sources of punched data used for this summary report cloud amounts in oktas. These have been converted to tenths prior to summarizing, and notation is made on the form to indicate that data were originally reported in oktas. The manner of conversion is given below:

OKTAS	TENTHS
0	0
1	1
2	3
3	4
4	5
5	6
6	8
7	9
8 (or obscured)	10

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-56,60-70 PERIOD | ALL MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
JAN	ALL	45.9	3.6	2.9	3.4	2.9	2.3	2.4	3.1	3.7	3.4	26.4	4.1	6105
FEB		40.3	4.7	3.6	3.6	3.2	2.4	2.7	2.9	4.4	2.6	29.6	4.4	5649
MAR		30.9	4.3	3.9	4.4	3.4	3.2	2.5	3.7	5.5	3.9	34.4	5.2	6202
APR		31.4	3.9	3.4	3.7	3.7	3.1	2.7	3.8	4.8	3.8	35.9	5.2	6809
MAY		24.6	4.4	4.2	4.4	3.9	3.1	3.4	3.9	5.9	5.1	37.2	5.7	6973
JUN		13.1	4.9	4.1	5.0	4.4	3.9	3.8	4.5	7.3	6.6	42.6	6.6	6977
JUL		5.5	2.5	2.8	3.9	4.1	4.1	2.9	5.1	7.7	7.7	53.7	7.8	7357
AUG		7.7	3.8	4.5	5.7	4.8	4.7	3.9	4.9	8.6	8.9	42.6	7.0	7273
SEP		19.3	5.0	4.5	5.4	4.8	3.6	2.6	4.1	5.9	6.6	38.3	6.0	6984
OCT		30.2	6.0	3.9	4.0	3.8	2.8	2.5	2.6	5.0	4.6	28.8	4.6	7294
NOV		35.7	3.9	3.1	3.3	3.6	3.0	2.7	3.6	5.0	3.4	32.8	4.9	6512
DEC		41.8	3.8	3.0	3.3	3.0	2.6	2.5	3.3	4.4	3.7	28.8	4.4	6425
TOTALS		27.7	4.2	3.7	4.2	3.8	3.2	2.9	3.8	5.7	5.0	35.9	5.5	80560

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 52-54,61-70 PERIOD | JAN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
JAN	00-02	52.5	.4	3.4	3.4	1.7	1.3	2.1	5.1	3.0	.4	26.7	3.7	236
	03-05	52.2	1.0	1.7	2.3	2.3	1.7	1.2	2.5	3.1	2.3	29.8	4.0	521
	06-08	47.6	3.4	3.0	3.0	2.5	1.8	2.1	2.9	3.2	3.1	27.4	4.0	1162
	09-11	37.2	6.8	3.4	4.5	3.5	2.1	2.8	2.3	3.8	5.4	28.2	4.5	1163
	12-14	41.0	6.0	2.9	3.5	3.2	3.1	3.1	3.1	4.6	3.9	25.6	4.2	1146
	15-17	38.4	6.2	3.4	3.5	3.8	3.9	3.7	2.8	5.6	4.4	24.3	4.3	1124
	18-20	41.5	4.6	4.4	3.8	4.2	2.9	3.5	4.0	2.9	3.8	24.2	4.1	520
	21-23	56.7	.4	1.3	3.0	1.7	1.7	.9	2.1	3.0	3.9	25.3	3.6	233
TOTALS		45.9	3.6	2.9	3.4	2.9	2.3	2.4	3.1	3.7	3.4	26.4	4.1	6105

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 52-54,61-70 (PERIOD) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
FEB	00-02	51.8	1.2	2.4	1.6	2.4	2.4	3.5	1.6	3.1	.4	29.6	3.9	255
	03-05	50.6	.6	2.5	4.0	2.3	1.3	1.3	2.7	4.2	1.9	28.4	3.9	476
	06-08	39.9	4.6	3.3	3.5	2.7	3.1	2.5	2.4	4.9	3.9	29.1	4.5	1062
	09-11	31.1	6.7	4.1	4.8	3.8	3.5	2.5	3.2	4.7	3.4	32.2	4.9	1060
	12-14	30.4	7.6	3.9	3.7	4.5	3.1	3.4	2.8	6.6	3.7	30.4	4.9	1041
	15-17	27.8	8.3	4.9	5.2	3.8	3.2	4.3	2.6	4.8	4.3	30.6	4.9	1020
	18-20	38.5	6.5	4.4	3.8	4.4	1.5	2.7	4.4	3.8	1.9	28.3	4.3	480
	21-23	51.8	2.0	3.1	2.4	2.0	1.2	1.6	3.5	3.1	1.2	28.2	3.8	255
	TOTALS	40.3	4.7	3.6	3.6	3.2	2.4	2.7	2.9	4.4	2.6	29.6	4.4	5649

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-70 MAR
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
MAR	00-02	42,7	2,2	1,8	2,9	2,9	2,2	1,4	1,8	7,5	1,8	33,0	4,6	279
	03-05	45,0	1,7	3,1	4,0	2,5	1,3	2,1	4,2	4,6	1,7	29,7	4,3	522
	06-08	34,3	5,1	3,4	4,0	3,7	2,5	3,2	2,5	4,4	5,4	31,6	4,9	1164
	09-11	26,8	6,5	4,6	4,1	3,5	3,6	1,5	2,8	4,9	3,8	37,7	5,4	1163
	12-14	21,3	6,9	3,1	5,6	3,6	2,9	3,8	3,9	6,9	4,6	37,4	5,8	1146
	15-17	18,4	5,9	4,6	5,4	3,7	4,3	3,3	4,5	7,8	5,3	36,8	6,0	1122
	18-20	23,1	4,6	5,5	3,4	2,7	4,0	3,6	5,1	5,7	5,7	36,6	5,8	527
	21-23	35,8	1,1	5,0	5,4	4,7	4,7	1,4	5,0	1,8	2,9	32,3	4,8	279
TOTALS		30,9	4,3	3,9	4,4	3,4	3,2	2,5	3,7	5,5	3,9	34,4	5,2	6202

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 (STATION) CAMP PAGE AAF KOREA/CHUNCHON (STATION NAME) 52-56,61-70 (PERIOD) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO. OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
APR	00-02	53,5	,4	3,0	3,3	3,7	5,6	,7	1,5	4,1	1,9	22,3	3,5	269
	03-05	45,1	1,6	2,7	3,5	3,1	1,4	1,0	3,1	3,3	2,7	32,4	4,4	510
	06-08	24,8	5,3	3,5	4,5	3,0	2,4	2,8	2,2	5,0	3,8	42,6	5,8	1311
	09-11	21,3	5,6	3,0	3,8	3,3	3,0	3,1	3,7	5,4	4,2	43,6	6,1	1311
	12-14	16,9	5,6	3,1	4,2	3,9	2,5	3,2	4,7	6,2	6,2	43,5	6,4	1295
	15-17	13,2	5,8	4,5	4,5	4,4	3,1	4,6	5,4	6,8	5,2	42,6	6,5	1275
	18-20	19,0	5,1	4,2	4,7	4,2	3,9	3,2	6,5	6,2	4,9	38,1	6,0	569
	21-23	57,2	1,5	3,3	,7	3,7	3,0	2,6	3,0	1,5	1,5	21,9	3,2	269
TOTALS		31,4	3,9	3,4	3,7	3,7	3,1	2,7	3,8	4,8	3,8	35,9	5,2	6809

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 CAMP PAGE AAF KOREA/CHUNCHEON 52-56,61-70 MAY
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
MAY	00-02	38.0	1.4	2.9	3.2	2.5	3.2	2.2	3.9	6.5	1.8	34.4	5.0	279
	03-05	32.6	2.1	5.0	4.0	3.1	2.1	3.6	4.6	4.4	4.4	34.0	5.2	521
	06-08	20.4	4.3	4.5	4.4	3.3	3.5	3.3	2.8	5.8	7.8	39.9	6.1	1341
	09-11	21.7	5.7	3.4	3.6	3.7	2.6	3.7	3.0	7.2	6.4	39.0	6.0	1341
	12-14	16.7	6.7	4.7	4.7	4.1	3.5	4.0	3.6	8.0	6.2	37.8	6.1	1324
	15-17	17.1	7.1	3.7	4.9	4.6	3.5	4.5	3.1	5.9	7.5	38.1	6.1	1302
	18-20	18.9	6.0	5.1	5.5	5.5	3.4	2.9	4.8	4.4	5.8	37.6	5.9	587
	21-23	31.3	1.8	4.0	5.0	4.3	2.9	3.2	5.0	4.7	1.1	36.7	5.3	278
	TOTALS	24.6	4.4	4.2	4.4	3.9	3.1	3.4	3.9	5.9	5.1	37.2	5.7	6973

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 CAMP PAGE AAF KOREA/CHUNCHON 51-56,61-70 JUN
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
JUN	00-02	27.3	3.1	4.1	3.1	3.1	2.7	4.1	3.4	6.5	2.0	40.6	5.7	293
	03-05	14.3	3.8	3.6	5.5	4.2	3.2	3.4	5.1	7.0	6.0	44.0	6.7	530
	06-08	9.8	5.3	3.5	4.1	3.3	2.6	3.5	3.3	5.9	9.7	49.2	7.2	1332
	09-11	10.5	6.6	3.5	3.6	5.1	3.0	3.2	3.9	7.2	7.9	45.5	6.9	1331
	12-14	7.8	5.3	3.7	5.8	5.8	5.4	3.3	5.2	8.5	8.1	41.1	6.9	1315
	15-17	5.2	5.3	4.0	4.6	6.4	6.4	5.8	4.8	8.1	8.4	40.9	7.0	1291
	18-20	8.4	5.7	4.9	7.7	4.0	3.0	4.4	6.6	8.8	6.9	39.6	6.7	594
	21-23	21.3	3.8	5.2	5.2	3.1	5.2	2.7	3.4	6.2	4.1	39.9	5.9	291
TOTALS		13.1	4.9	4.1	5.0	4.4	3.9	3.8	4.5	7.3	6.6	42.6	6.6	6977

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-54,56,61-70 PERIOD | JUL MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
JUL	00-02	14.2	2.4	3.0	5.4	5.4	4.0	1.9	6.2	8.3	4.3	44.9	6.8	372
	03-05	8.3	3.3	3.4	3.3	2.5	3.6	2.8	2.9	8.0	3.6	58.3	7.6	612
	06-08	3.0	1.9	1.2	2.3	1.9	2.6	1.9	3.8	6.7	7.8	67.1	8.6	1350
	09-11	2.3	2.8	1.8	2.1	3.7	3.6	2.8	4.7	7.0	8.6	60.4	8.3	1348
	12-14	1.5	2.3	1.9	3.9	4.6	5.1	3.7	4.8	9.1	10.0	53.1	8.1	1336
	15-17	1.3	2.4	3.1	4.3	5.6	5.0	4.5	5.5	8.7	9.6	50.1	7.9	1316
	18-20	3.5	2.2	3.2	5.1	4.3	4.9	3.7	7.5	7.2	10.4	47.9	7.7	651
	21-23	10.2	2.7	4.6	4.8	4.8	4.3	2.2	5.4	6.5	6.7	47.8	7.1	372
	TOTALS	5.5	2.5	2.8	3.9	4.1	4.1	2.9	5.1	7.7	7.7	53.7	7.8	7357

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-54,56,61-70 PERIOD | AUG MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L S T)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
AUG	00-02	20.7	4.6	4.3	5.1	4.0	4.6	3.5	5.6	6.5	6.2	34.9	5.8	372
	03-05	11.0	2.6	4.2	6.1	4.2	3.0	3.2	5.9	6.2	7.4	46.2	7.0	625
	06-08	4.2	2.9	1.6	2.5	2.8	3.3	2.5	4.0	6.0	10.6	59.6	8.2	1341
	09-11	3.7	3.1	2.5	4.8	3.6	4.8	3.3	4.3	9.7	11.6	48.8	7.8	1341
	12-14	1.6	3.7	4.2	5.5	6.4	6.8	5.4	5.0	11.0	9.5	40.9	7.4	1323
	15-17	1.5	3.3	5.4	6.4	6.8	5.6	4.8	5.7	10.2	10.8	39.4	7.3	1293
	18-20	4.5	4.3	6.6	5.8	5.3	5.0	4.1	5.3	10.8	9.5	38.8	7.0	603
	21-23	14.7	5.6	7.5	9.1	5.3	4.5	4.0	3.7	8.0	5.6	32.0	5.8	375
TOTALS		7.7	3.8	4.5	5.7	4.8	4.7	3.9	4.9	8.6	8.9	42.6	7.0	7273

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-54,56,61-70 PERIOD | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
SEP	00-02	38.9	2.5	5.3	5.8	3.9	1.9	1.4	3.3	3.1	4.4	29.4	4.5	360
	03-05	26.1	2.9	4.7	3.9	3.9	1.5	2.5	4.9	5.9	2.7	41.2	5.8	595
	06-08	9.2	5.3	1.8	3.2	1.9	2.5	1.5	2.2	5.9	8.3	58.2	7.7	1293
	09-11	7.7	5.6	2.5	5.2	4.6	3.4	2.2	3.3	7.3	8.9	49.3	7.3	1293
	12-14	9.9	6.2	4.0	7.4	6.1	6.2	3.9	5.3	7.3	9.9	33.9	6.4	1272
	15-17	9.2	7.2	5.1	7.7	6.8	5.5	4.1	4.4	6.0	7.3	36.8	6.3	1241
	18-20	18.1	6.0	6.5	4.6	5.6	4.4	4.2	4.9	6.5	7.5	31.8	5.7	570
	21-23	35.3	4.4	6.4	5.6	5.3	3.3	.8	4.2	5.0	3.6	26.1	4.4	360
	TOTALS	19.3	5.0	4.5	5.4	4.8	3.6	2.6	4.1	5.9	6.6	38.3	6.0	6984

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-54,56,60-70 PERIOD | OCT MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
OCT	00-02	61.0	3.0	3.0	1.8	.9	1.5	.6	2.1	3.9	1.5	20.7	3.0	333
	03-05	46.0	2.9	2.1	3.2	3.7	1.3	2.1	1.6	3.1	2.8	31.1	4.2	617
	06-08	10.4	5.0	2.9	4.2	4.0	2.8	2.4	3.7	5.0	6.8	46.8	6.6	1370
	09-11	10.1	5.8	2.7	3.7	3.8	3.5	2.8	3.2	7.1	8.0	43.4	6.6	1370
	12-14	27.7	8.9	4.0	5.5	5.7	5.1	3.3	3.6	7.0	6.6	22.5	4.7	1345
	15-17	20.3	9.0	5.4	5.5	5.8	3.9	4.0	3.3	6.8	5.8	24.1	4.7	1319
	18-20	36.8	6.0	6.8	5.0	4.3	2.5	3.5	2.8	3.3	4.3	22.7	4.0	603
	21-23	59.1	5.0	3.9	2.7	2.4	1.8	1.2	.6	3.6	.9	19.0	2.8	337
		[illegible]	[illegible]	3.9	[illegible]	3.8	2.8	2.5	2.6	5.0	4.6	28.8	4.6	7294

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-54,60-70 PERIOD | NOV MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
NOV	00-02	52.2	2.2	1.9	3.0	1.9	3.7	2.6	3.3	3.0		26.3	3.7	271
	03-05	43.3	1.0	2.3	2.5	3.4	1.5	2.8	4.4	4.3	1.0	33.6	4.6	610
	06-08	20.8	3.4	2.3	3.1	2.4	2.7	2.2	3.3	5.3	5.0	43.0	5.9	1230
	09-11	21.6	4.3	2.3	3.3	4.5	2.6	3.3	2.9	5.1	5.2	44.9	6.3	1224
	12-14	24.2	6.0	3.8	4.7	4.8	4.1	3.3	3.5	6.1	6.3	33.3	5.5	1199
	15-17	28.6	5.4	4.0	4.1	5.5	4.3	2.5	3.8	6.6	5.5	29.6	5.1	1173
	18-20	35.4	5.2	5.4	4.5	3.4	3.5	2.6	3.9	5.2	2.8	28.0	4.5	534
	21-23	53.3	3.7	2.6	1.5	2.6	1.9	2.2	3.3	4.1	1.1	23.7	3.5	270
TOTALS		35.7	3.9	3.1	3.3	3.6	3.0	2.7	3.6	5.0	3.4	32.8	4.9	6512

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

SKY COVER

43271 CAMP PAGE AAF KUREA/CHUNCHON 51-53,60-70 DEC
STATION STATION NAME PERIOD MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF TENTHS OF TOTAL SKY COVER											MEAN TENTHS OF SKY COVER	TOTAL NO OF OBS
		0	1	2	3	4	5	6	7	8	9	10		
DEC	00-02	50,4	,4	1,7	1,7	3,3	,8	1,3	2,1	3,3	2,1	32,9	4,2	240
	03-05	52,3	1,5	1,7	3,3	2,6	1,7	2,1	2,8	3,8	1,2	27,1	3,8	606
	06-08	41,1	3,3	2,9	3,8	2,8	2,5	2,2	2,6	3,8	4,0	30,9	4,5	1223
	09-11	30,1	4,6	3,6	4,3	3,1	2,6	2,7	2,9	5,0	6,1	35,0	5,3	1217
	12-14	31,1	6,6	2,9	4,2	4,4	3,7	3,7	3,1	7,1	5,8	27,5	4,9	1190
	15-17	32,0	7,6	3,5	4,0	4,0	4,1	2,4	3,6	6,5	5,5	26,6	4,7	1167
	18-20	43,8	4,4	3,7	1,8	2,4	2,6	2,9	6,3	3,9	2,8	25,4	4,1	543
	21-23	53,6	1,7	3,8	2,9	1,3	2,9	2,5	2,9	2,1	1,7	24,7	3,5	239
	TOTALS	41,8	3,8	3,0	3,3	3,0	2,6	2,5	3,3	4,4	3,7	28,8	4,4	6425

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART E PSYCHROMETRIC SUMMARIES

In this section are presented various summaries of dry- and wet-bulb temperatures, dew points, and relative humidity. The order and manner of presentations follows:

1. Cumulative percentage frequency of occurrence - derived from daily observations and presented by month and annual for all years combined. These tabulations provide the cumulative percentage frequency to tenths of temperature by 5-degree Fahrenheit increments, plus mean temperature, standard deviations, and total number of observations in three separate tables as follows:

   a. Daily maximum temperatures
   b. Daily minimum temperatures
   c. Daily mean temperatures

   NOTE: Beginning in January 1964, daily maximum and minimum temperatures are routinely selected from hourly observations recorded on surface observing forms or from automated data collections for all Air Force operated stations. For those stations observing less than 24 hours per day, and where maximum and minimum temperatures are required but not recorded, these are also selected from hourly data from as early as January 1949 and later. Please refer to notations on summary pages and Station History for further information on reporting practices of individual stations.

2. Extreme values - derived from daily observations with the extreme value selected for each year and month of record available. An annual (ALL MONTHS) value is selected when all months for a year have valid extremes. Means and standard deviations are computed for months and annual when four or more values are present for any column. Two tables of daily extremes are prepared:

   a. Extreme maximum temperature
   b. Extreme minimum temperature

   NOTE: The following symbols are used in the extreme data blocks:

   (1) * indicates the extreme was selected from a month with one or more days missing.

   (2) # indicates the extreme was selected from a month in which hourly temperatures were available for less than 24 hours for at least one day in the month.

E

Continued on Reverse

3. Bivariate percentage frequency distribution and computations of dry-bulb versus wet-bulb temperature. This tabulation is derived from hourly observations and is presented by month and annual, all hours and years combined. The following information is provided:

   a. The main body of the summary consists of a bivariate percentage frequency distribution of wet-bulb depression in 17 classes spread horizontally; by 2-degree intervals of dry-bulb temperature spread vertically. Also provided for each of the dry-bulb intervals is the percentage of observations with dry-bulb and wet-bulb temperature combined; and again for dry-bulb, wet-bulb, and dew-point temperatures separately. Total observations for these four items is also provided in two lines at end of each tabulation table, which may be continued on several pages.

      NOTE: A percentage frequency in this table of ".0" represents one or more occurrences amounting to less than .05 percent.

   b. Statistical data for the individual elements of relative humidity, dry-bulb, wet-bulb, and dew-point temperatures are shown in the section at the bottom left of the forms. These consist of the sum of squares (ΣX^2), sums of values (ΣX), means ($\bar{X}$), and standard deviations (σx). The number of observations used in the computation for each element is also shown.

   c. At the lower right of the form are given the mean number of hours of occurrence for six ranges of dry-bulb, wet-bulb, and dew-point temperatures, and total number of hours possible in the period represented. Mean number of hours is shown to tenths and indicates mean number of hours per year in the annual summary, or mean number of hours per month in the tabulation by month.

      NOTE: Wet-bulb temperature usually was not reported prior to 1946. Relative humidity usually was not reported prior to 1949, nor subsequent to June 1958; and was computed by machine methods for observations recorded during these periods. All values of dew-point temperature and relative humidity are with respect to water, unless otherwise indicated.

4. Means and standard deviations - These tabulations are derived from hourly observations and present the mean, standard deviation, and total number of observations for the eight standard 3-hour groups, by month and annual and again at the bottom for all hours combined. Records for all years combined are presented in the following three tables; DRY-BULB TEMPERATURE, WET-BULB TEMPERATURE, and DEW-POINT TEMPERATURE.

5. Cumulative percentage frequency of occurrence of relative humidity - This summary is derived from hourly observations and presents the cumulative percentage frequency of occurrence of relative humidity by increments of 10% classes, plus the mean relative humidity and total number of observations in two tables.

   a. Table 1 is prepared by month and annual, all years combined, with month being the vertical argument.

   b. Table 2 is prepared by month by standard 3-hour groups, with the hour groups being the vertical argument and a separate page for each month. All years are also combined for this summary.

DAILY TEMPERATURES

[illegible] AIR FORCE MAJCOM
[illegible] LT.
[illegible] EAST [illegible] WING/[illegible]
93271 STATION CAMP PAGE AAF [illegible]/CHUNCHEON STATION NAME 21-34

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
FROM DAILY OBSERVATIONS

TEMP °F	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
95						1.0	4.0	2.					1.
90						13.9	30.6	41.1					5.7
85					1.4	31.5	54.8	67.7	1.				17.1
80				4.4	34.4	52.8	78.2	86.3	4.	4.			27.1
75				12.2	61.6	77.6	91.1	95.2	73.1	17.4			41.2
70				27.9	84.9	90.3	100.0	99.2	93.3	36.7			55.2
65			3.3	50.0	95.6	9 .1		100.0	97.5	59.	.8		67.4
60			11.5	77.2	100.0	100.0			100.0	89.1	27.3	1.	84.7
55		1.7	31.3	96.4						96.4	47.1	4.	7 .1
50	.4	3.2	52.	92.9						100.	67.2	1.	94.4
45	3.4	11.3	80.9								78.2	16.3	7 .4
40	22.1	47.1	96.7	100.0							91.1	4 .1	97.4
35	55.	67.1	97.								98.6	74.7	9 .8
30	77.	80.0	100.0								1.9	91.1	99.6
25	93.5	96.									100.0	97.7	99.8
20	97.7	100.0										100.0	99.9
15	100.												100.0
MEAN	34.5	37.3	50.2	63.1	76.4	80.4	84.7	86.7	77.4	67.	51.8	32.8	62.7
S D	6.741	7.058	7.663	7.636	6.306	7.409	6.701	6.21	5.459	6.832	9.182	6.946	19.316
TOTAL OBS	77	85	93	90	91	98	124	124	119	109	87	79	1178

USAF ETAC FORM JUL 64 0 21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DAILY TEMPERATURES

STATION NAME [illegible] 51-54 YEARS

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
FROM DAILY OBSERVATIONS

TEMP °F	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANN'L
75							[illegible].1	18.[illegible]					[illegible]
70						1.[illegible]	41.2	32.1	[illegible]				11.1
65					1.1	13.3	79.[illegible]	90.[illegible]	1[illegible].1				2[illegible].1
60					12.[illegible]	38.2	97.6	96.[illegible]	4[illegible].3				3[illegible].3
55				1.1	41.9	9[illegible].9	99.2	99.[illegible]	67.2	4.[illegible]			5[illegible].[illegible]
50				10.3	71.0	100.0	100.0	100.0	9[illegible].6	10.[illegible]			4[illegible].2
45			1.1	25.7	91.4				97.5	38.[illegible]	[illegible].[illegible]		52.5
40			[illegible].3	50.0	97.[illegible]				100.0	66.1	11.[illegible]	2.[illegible]	3[illegible].7
35		4.7	17.4	78.7	100.0					91.7	39.1	4.[illegible]	66.[illegible]
30	1.[illegible]	11.[illegible]	43.7	95.[illegible]						98.[illegible]	81.5	9.1	78.1
25	3.[illegible]	18.8	69.4	96.9						98.2	94.4	18.[illegible]	89.2
20	17.[illegible]	29.2	88.[illegible]	100.0						100.0	98.[illegible]	34.2	97.[illegible]
15	33.[illegible]	48.2	96.[illegible]								99.3	60.[illegible]	99.[illegible]
10	5[illegible].[illegible]	65.[illegible]	100.0								99.6	83.5	99.[illegible]
5	7[illegible].[illegible]	78.[illegible]									100.0	92.4	99.1
0	8[illegible].1	90.[illegible]										100.0	99.[illegible]
-5	9[illegible].[illegible]	98.[illegible]											99.[illegible]
	100.0	100.0											100.0
MEAN	15.3	18.6	29.6	40.2	52.4	60.[illegible]	68.3	70.2	57.1	42.[illegible]	32.0	21.4	42.4
S.D.	9.30	10.341	5.514	6.304	9.728	3.[illegible]13	4.585	4.566	6.260	6.655	7.[illegible]64	7.734	19.600
TOTAL OBS.	77	85	93	90	93	98	124	124	119	109	87	79	117[illegible]

USAF ETAC FORM JUL 64 0-21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DAILY TEMPERATURES

[redacted] 31-54

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM DAILY OBSERVATIONS

TEMP °F	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
85							3.2	4.					.
80						4.1	29.	31.					1.
75					2.2	22.9	69.3	41.	1.2				17.
70					13.1	59.2	94.4	95.	3.1				29.
65				2.	52.7	91.9	100.0	99.	13.9	3.			41.2
60				14.9	87.1	99.		100.	31.9	21.1			4.
55			.1	31.9	97.8	100.0			100.0	58.7	1.1		55.
50			.3	70.0	100.0					87.	2.	1.	62.
45			2.	87.						99.	22.	2.	69.
40		1.	7.	97.						100.0	61.	2.	74.
35	1.	3.	19.	100.0							91.	27.	81.
30	11.	7.	37.								96.	58.	88.
25	31.	17.	100.0								99.6	81.	93.
20	71.	42.									100.0	92.	96.
15	87.	92.										100.0	98.
10	100.	100.											100.0
MEAN	23.2	28.7	40.1	53.0	64.7	70.7	76.7	78.7	67.5	55.5	42.5	30.4	52.
S D	7,424	8,585	5,73	5,654	4,993	4,691	4,738	4,579	4,972	5,687	7,698	4,899	19,116
TOTAL OBS.	77	83	93	90	93	96	124	124	119	109	87	79	1178

USAF ETAC FORM JUL 64 0-21-5 (OL 1) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MAXIMUM TEMPERATURE
(FROM DAILY OBSERVATIONS)

43271 STATION CAMP PAGE AAF KOREA/CHUNCHON STATION NAME 51-54 YEARS

WHOLE DEGREES FAHRENHEIT

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
51							99	97					
52		48	65	80	89	94	97	97	88	78	66	49	
53	50	56	63	80	85	91	95	95	86	82	62	60	95
54	52	52	67	82	89	87	90	94	85	76			
MEAN	51.0	52.0	65.0	80.7	87.7	90.7	95.3	95.8	86.7	78.7	64.0	54.5	95.0
S D							3.862	1.500					
TOTAL OBS.	62	85	92	90	93	90	124	124	90	93	60	62	1060

USAF ETAC FORM JUL 64 0-88-5 (OLI)

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MAXIMUM TEMPERATURE
FROM DAILY OBSERVATIONS

43271 STATION — CAMP PAGE AAF KOREA/CHUNCHON STATION NAME — 51-54 YEARS

WHOLE DEGREES FAHRENHEIT
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
51						95			83	81	55	52	MAX TEMP
									29	16	14	17	DAYS
52	41												MAX TEMP
	15												DAYS
54											66		MAX TEMP
											13		DAYS
MEAN													
S.D.													
TOTAL OBS													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MINIMUM TEMPERATURE
(FROM DAILY OBSERVATIONS)

43271 STATION CAMP PAGE AAF KOREA/CHUNCHON STATION NAME 51-54 YEARS

WHOLE DEGREES FAHRENHEIT

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ALL MONTHS
51							60	65					
52		0	15	31	44	52	62	64	42	29	22	5	
53	-3	-1	22	28	36	53	62	53	48	35	17	13	-3
54	9	7	16	35	43	55	51	60	46	29			
MEAN	3.0	2.0	17.7	31.3	41.0	53.3	58.8	60.5	45.3	31.0	19.5	9.0	-3.0
S.D							5.252	5.447					
TOTAL OBS.	62	85	92	90	92	90	124	124	90	93	60	62	1060

USAF ETAC FORM JUL 64 0-88-5 (OLI)

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

EXTREME VALUES

MINIMUM TEMPERATURE
FROM DAILY OBSERVATIONS

43271 STATION — CAMP PAGE AAF KOREA/CHUNCHON STATION NAME — 51-54 YEARS

WHOLE DEGREES FAHRENHEIT
/BASED ON LESS THAN FULL MONTHS/

YEAR \ MONTH	JAN	FEB.	MAR	APR.	MAY	JUN	JUL.	AUG.	SEP	OCT.	NOV.	DEC	ALL MONTHS
51						56			44	34	12	5	MIN TEMP
						1			29	16	14	17	DAYS
52	4												MIN TEMP
	15												DAYS
53											27		MIN TEMP
											13		DAYS
MEAN													
S.D.													
TOTAL OBS.													

USAF ETAC FORM JUL 64 0-88-5 (OLI)

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

MONTH

HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew Point
108/103																				
102/101																				
100/ 99																				
98/ 97																				
96/ 95																				
94/ 93																				
92/ 91																				
90/ 89																				
88/ 87																				
86/ 85																				
84/ 83																				
82/ 81																				
80/ 79																				
78/ 77																				
76/ 75																				
74/ 73																				
72/ 71																				
70/ 69																				
68/ 67																				
66/ 65																				
64/ 63																				
62/ 61																				
60/ 59																				
58/ 57																				
56/ 55																				
54/ 53																				
52/ 51																				
50/ 49																				
48/ 47																				
46/ 45																				
44/ 43																				
42/ 41																				
40/ 39																				
38/ 37																				

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≥ 0 F	≥ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64

2

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93271 — CAPE RACE AUT SERVICE/CANADA — 21-5 yr -7 — YEARS — GMT

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	TOTAL W.B.	TOTAL Dr. Bulb	TOTAL Wet B.	TOTAL Dew P.
36/ 35	.3	1.1	.6	.2	.2	.1												2	2	2	2	1
34/ 33	.3	1.2	.7	.2	.2	.1												2	2	2	2	1
32/ 31	.3	1.2	.7	.3	.1	.1	.1											2	2	2	2	1
30/ 29	.3	1.1	.7	.3	.1													2	2	2	2	1
28/ 27	.2	1.1	.6	.3	.0													1	2	2	2	1
26/ 25	.2	1.0	.6	.2	.1													1	1	2	2	1
24/ 23	.2	.9	.5	.1														1	1	1	2	1
22/ 21	.1	.6	.4	.1														1	1	1	2	1
20/ 19	.2	.5	.3	.0														1	1	1	2	1
18/ 17	.1	.7	.2	.1														1	1	1	2	1
16/ 15	.2	.5	.1															1	1	1	2	1
14/ 13	.2	.5	.1															1	1	1	2	1
12/ 11	.1	.4	.1															1	1	1	2	1
10/ 9	.1	.3	.0															1	1	1	2	1
8/ 7	.2	.2	.0															1	1	1	2	1
6/ 5	.1	.2	.0															1	1	1	2	1
4/ 3	.1	.1	.0															1	1	1	2	1
2/ 1	.1	.1																1	1	1	2	1
0/ -1	.1	.0																1	1	1	1	1
-2/ -3	.1	.2																1	1	1	1	1
-4/ -5	.0	.1																1	1	1	1	1
-6/ -7	.0	.0																1	1	1	1	1
-8/ -9	.0																	1	1	1	1	1
-10/-11	.0	.0																1	1	1	1	1
-12/-13	.0																	1	1	1	1	1
-14/-15																						1
-16/-17																						1
-18/-19																						1
-20/-21																						1
-22/-23																						1
-24																						1
TOTAL	.3	29.5	17.7	8.5	4.0	2.0	1.0	.5	.2	.1	.0	.0						64716				64490
																		64512		64502		

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4455970930	5176714	69.52	20.321	64512							
Dry Bulb	2351696348	4583192	54.12	21.254	64716	30.9	186.3	2914.6	1230.0	904.3	4.2	7082
Wet Bulb	2309597125	4119265	48.71	19.612	64502	33.7	222.1	1791.7	677.0	59.2		5760
Dew Point	1946032469	3643150	43.02	21.210	64490	221.4	3109.0	1311.1	572.5	12.5		6760

USAFETAC FORM 0-26-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AD-A088 949 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
CAMP PAGE AAF, CHUNCHON, KOREA. REVISED UNIFORM SUMMARY OF SURF--ETC(U)
MAR 74
UNCLASSIFIED USAFETAC/DS-80-075 NL



DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP PAGE AAF (KOREA/CHUNCHON) — STATION NAME
52-54,61-74 — YEARS
ALL — MONTH
ALL — HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
52/ 51					.0														1		
50/ 49				.0	.0														2		
48/ 47		.0	.0	.1	.0	.0												17	17		
46/ 45		.0	.0	.2	.1	.1												3	3	3	1
44/ 43			.2	.4	.2	.1												50	49	41	1
42/ 41	.0	.1	.2	.7	.3	.1												82	82	10	
40/ 39		.3	.7	1.0	.7	.1	.0											176	176	35	6
38/ 37	.0	.6	1.2	1.3	.4	.1												243	243	95	1
36/ 35	.1	1.5	2.0	1.0	.4	.1												327	327	199	31
34/ 33	.3	2.3	1.6	1.2	.4	.0												326	326	325	102
32/ 31	.4	2.9	2.2	1.7	.4													395	395	442	175
30/ 29	.6	3.1	2.3	1.2	.4													452	452	457	260
28/ 27	.7	2.8	2.3	1.0	.1													454	454	506	350
26/ 25	.5	3.2	2.5	1.1	.0													461	464	498	337
24/ 23	.6	2.7	2.0	.9														393	393	500	384
22/ 21	.7	3.3	1.9	.4														406	406	468	329
20/ 19	.6	3.4	1.6	.3														383	383	480	327
18/ 17	.2	3.2	1.1	.1														320	320	405	324
16/ 15	.8	3.4	.7															314	314	372	445
14/ 13	.9	2.8	.4															270	270	349	411
12/ 11	.6	2.3	.4															225	225	267	35
10/ 9	.8	2.0	.1															196	196	245	259
8/ 7	1.1	1.6	.1															176	176	200	343
6/ 5	1.0	1.3																151	151	167	35
4/ 3	.0	.9																100	100	130	313
2/ 1	.0	.6																90	90	99	208
0/ -1	1.0	.4																89	90	90	273
-2/ -3	.0	.1																59	59	67	189
-4/ -5	.5	.0																36	36	40	275
-6/ -7	.2	.0																16	17	16	155
-8/ -9	.2																	10	10	11	117
-10/-11	.2	.0																17	17	17	62
-12/-13																					50
-14/-15																					4

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITION OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAMP PAGE AAF KOREA/CHUNCHON 52-54,61-72 [illegible]
STATION STATION NAME YEARS MONTH

[illegible] ALL
HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
-16/-17																			22
-18/-19																			17
-20/-21																			
TOTAL	14,844	6023	5126	3.2	0	0												6519	6498

Element (X)	$\Sigma x'$	Σx		σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	30788024	432922	60,617	303	6498							
Dry Bulb	4272923	150539	23,111	055	6519	26.1	590.5					744
Wet Bulb	3413087	139105	20.6	9,967	6498	27.6	667.1					744
Dew Point	1964307	82873	12.8	11,818	6498	125.3	726.9					744

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43272 — STATION
CAMP PAGE AAF KOREA/CHUNCHEON — STATION NAME
52-54,61-72 — YEARS
— MONTH
PART I — HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
56/ 55				.0	.0	.1		.0										11	11		
54/ 53				.0	.0	.1	.1	.0										17	17		
52/ 51			.0	.0	.1	.1	.0											15	15		
50/ 49			.0	.1	.4	.2	.0											45	45	2	
48/ 47			.0	.2	.3	.2	.0	.0										50	50	8	
46/ 45		.1	.3	.6	.7	.2	.0											115	115	12	3
44/ 43	.0	.2	.4	1.1	.5	.3	.1											164	164	38	6
42/ 41	.1	.5	.7	1.2	.8	.3	.1											238	238	95	11
40/ 39	.2	.8	1.2	1.2	1.4	.4												313	313	165	47
38/ 37	.1	1.3	1.9	1.9	1.1	.2												357	358	236	65
36/ 35	.3	2.4	2.4	1.7	.6	.0												450	450	307	81
34/ 33	.0	2.8	2.1	1.6	.7	.0												471	472	427	220
32/ 31	.4	2.6	2.0	1.7	.4	.0	.0											431	435	393	262
30/ 29	.3	2.7	2.4	1.3	.2													446	447	478	265
28/ 27	.5	2.5	2.5	1.4	.1													422	425	472	330
26/ 25	.7	3.0	2.2	1.0	.0													417	417	483	389
24/ 23	.4	3.1	2.0	.0														371	372	503	343
22/ 21	.4	2.0	1.4	.3														280	281	420	316
20/ 19	.6	2.4	1.5	.1														277	277	371	360
18/ 17	.4	2.6	.6															220	220	292	376
16/ 15	.5	2.3	.5															201	201	259	367
14/ 13	.4	1.9	.2															154	154	194	370
12/ 11	.5	1.4	.1															120	120	174	355
10/ 9	.6	1.4	.0															121	121	131	304
8/ 7	.7	1.2																118	118	120	315
6/ 5	.7	.5	.0															77	77	104	314
4/ 3	.5	.4	.0															58	58	63	225
2/ 1	.2	.2																26	26	33	203
0/ -1	.1	.1																12	12	17	154
-2/ -3	.0	.1																7	7	9	99
-4/ -5	.0	.0																3	3	5	74
-6/ -7	.1																	6	6	6	42
-8/ -9	.1																	7	7	7	28
-10/-11	.0																	2	2	2	19

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

4321 — CAMP PAGE AAF KOREA/CHUCHON — 52-54,61-72 — — — ALL

STATION NAME — YEARS — MONTH — HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
-12/-13	,0																	1	1	1	1
-14/-15																					
-16/-17																					
-18/-19																					
-20/-21																					
TOTAL	9,739	5,23	3,71	0,6	7,5	2,2	,5	,1											6,32		6026
																		6027		6027	

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	27542873	393159	65,2	18,200	6027							
Dry Bulb	5433710	169208	28,0	10,710	6039	4,2	421,4					67
Wet Bulb	4261601	149939	24,9	9,391	6027	5,2	528,2					67
Dew Point	2454272	101410	16,8	11,140	6026	50,3	621,3					67

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

2

43271 — CAMP PAGE AAF KUNSAN/CHUNCHON — 52-54,61-72 — — — ALL
STATION — STATION NAME — YEARS — MONTH — HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew P.
70/ 69								.0			.0							4	4	
68/ 67							.0	.1	.0	.0	.0							12	16	
66/ 65				.0		.0	.1	.1	.1	.0								24	24	
64/ 63					.0	.1	.2	.3	.1	.1								41	41	
62/ 61			.0	.0	.0	.0	.1	.4	.2	.0								81	81	
60/ 59		.0	.0	.0	.0	.2	.4	.6	.2	.1								1.3	103	6
58/ 57		.0		.1	.2	.3	.4	.5	.3	.0								1.3	124	2
56/ 55		.1	.1	.1	.3	.7	1.0	.5	.2	.0								2.1	201	16
54/ 53		.1	.1	.3	.4	1.1	.7	.3	.1									3.4	327	28
52/ 51		.2	.2	.7	.9	1.1	.5	.2										2.6	266	39
50/ 49		.2	.6	.9	1.3	1.1	.5	.1										3.1	314	100
48/ 47	.1	.5	.8	1.1	1.4	1.0	.5	.2										3.1	3.1	186
46/ 45	.2	.7	1.1	1.5	1.4	.9	.2											4.1	415	344
44/ 43	.2	1.0	1.1	1.1	1.3	.9	.2											4.0	4.0	439
42/ 41	.3	1.3	1.5	1.1	1.1	.5	.0											4.1	413	511
40/ 39	.3	1.5	1.7	1.4	1.4	.4												4.7	467	546
38/ 37	.4	2.3	1.7	1.0	1.0	.2												4.4	4.4	594
36/ 35	.7	3.0	4.2	1.3	.9	.1												5.7	5.7	583
34/ 33	.6	3.9	2.0	1.2	.4													5.3	5.3	451
32/ 31	.7	3.7	1.7	.5	.1													4.9	4.9	698
30/ 29	.6	3.0	1.5	.7	.1													3.5	3.5	624
28/ 27	.4	2.2	.9	.2														2.7	2.7	432
26/ 25	.3	2.2	.6	.1														2.1	2.1	344
24/ 23	.2	1.9	.4	.1														1.4	1.4	254
22/ 21	.1	1.0	.2															.4	.4	151
20/ 19	.1	.6	.1															.3	.3	84
18/ 17	.1	.4	.0															.3	.3	57
16/ 15	.0	.2																.1	.1	30
14/ 13		.0																.0	.0	9
12/ 11																				1
10/ 9																				1
8/ 7																				7
6/ 5																				3
4/ 3																				2

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR FORCE SERVICE WEATHER CENTER

PSYCHROMETRIC SUMMARY

63271 STATION | CAMP PAGE AAF, KOREA/CHUNCHON STATION NAME | 52-56, 61-72 YEARS | MONTH

ALL HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
2/ 1																					7
0/ -1																					
-2/ -3																					
-4/ -5																					
-6/ -7																					1
TOT.	5,430	6,916	9,212	12,262	9,870	4,606	3,041	1,262	474	140								6728	6736	6728	6720

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	30305886	429192	63,8	20,859	6728							
Dry Bulb	11297063	267621	39,7	9,933	6736		186,1	1,8				744
Wet Bulb	8558706	234908	34,9	7,563	6728		296,7					744
Dew Point	5425751	181121	26,9	9,041	6728	,9	539,4					744

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP PAGE AGF KOREA/CHUNCHEON — STATION NAME
52-56,61-72 — YEARS
— MONTH
— HOURS (L.S.T.)
ALL

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
86/ 85										.1									4		
84/ 83												.0	.1	.0					6		
82/ 81									.1	.0	.0	.0	.1					17	17		
80/ 79							.1	.1	.1	.0	.1	.2	.1	.0				42	42		
78/ 77							.1	.1	.1	.2	.2	.3	.1	.0				85	85		
76/ 75						.0	.1	.2	.2	.3	.4	.3	.0					107	109		
74/ 73				.0	.0	.1	.2	.2	.3	.4	.3	.1	.0					122	124		
72/ 71				.0		.1	.2	.3	.3	.3	.3	.1	.0					143	150		
70/ 69		.0	.1	.1	.2	.3	.2	.3	.7	.7	.5	.1						240	242		
68/ 67		.1	.1	.1	.3	.4	.4	.4	.7	.5	.4	.0						244	247	17	2
66/ 65	.0	.2	.2	.2	.3	.4	.5	.7	.8	.5	.1							264	267	33	10
64/ 63	.0	.1	.2	.4	.4	.0	.6	.0	.0	.5	.0							313	316	66	25
62/ 61	.1	.3	.3	.5	.5	.6	.9	1.0	.8	.2								411	416	113	33
60/ 59	.1	.2	.3	.3	.6	.9	1.1	1.3	.5	.1								419	422	190	70
58/ 57	.1	1.0	.9	.6	1.0	1.1	1.1	.7	.3	.0								463	467	308	85
56/ 55	.4	1.2	.6	1.0	1.1	1.0	1.0	.4	.2									491	493	453	175
54/ 53	.3	1.1	.9	1.2	1.3	1.3	.5	.3	.1									493	503	474	213
52/ 51	.3	1.4	1.4	1.0	1.1	.7	.4	.2	.0									507	512	564	243
50/ 49	.2	1.5	1.8	1.3	.9	.5	.3	.1										463	466	673	316
48/ 47	.2	1.9	1.9	1.3	.9	.3	.1											477	482	758	284
46/ 45	.2	1.7	1.7	.8	.5	.2	.1											370	373	819	420
44/ 43	.2	1.6	1.7	.9	.2	.2	.2											337	339	627	486
42/ 41	.3	1.3	1.3	.5	.3	.0												303	304	538	559
40/ 39	.2	1.7	1.0	.3	.0	.0												233	233	480	598
38/ 37	.1	1.5	.6	.2	.1													187	188	342	614
36/ 35	.3	1.5	.5	.1														169	172	276	595
34/ 33	.2	1.0	.4	.0														117	119	200	579
32/ 31	.1	.7	.1	.0														62	63	128	486
30/ 29	.0	.3	.1	.0														27	28	65	359
28/ 27	.0	.1	.1	.0														18	20	29	316
26/ 25		.0																1	1	9	217
24/ 23																				6	159
22/ 21																					103
20/ 19																					70

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

432?? STATION | CAMP PAGE AAF [illegible]/CHICHI STATION NAME | 52-56,61-72 YEARS | Apr MONTH

HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
18/ 17																					1
16/ 15																					4
14/ 13																					21
12/ 11																					13
10/ 9																					11
8/ 7																					4
6/ 5																					3
4/ 3																					2
~~11 or 13~~																					1
~~12 or 14~~																					1
TOTAL	3,2	21,4	16,5	11,0	9,9	6,5	5,2	5,9	5,9	4,3	2,1	1,3	,4	,1				7168	7168	7168	7168

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	30529232	430878	60,9	23,334	7168							
Dry Bulb	22027958	391356	54,6	10,966	7239		11,1	102,6	39,1	4,7		72
Wet Bulb	16037209	334023	46,7	7,619	7168		23,8	1,7				72
Dew Point	11374609	276097	38,5	10,161	7168		186,7	,2				72

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING AGCY
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

69271 — SAN FRANCISCO AP (AREA/CITY) — 52-56, 61-72 — JAN — ALL

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew Pt
92/ 91													.0		.0	.0		3	3	
90/ 89											.1	.1	.0	.0	.1	.0		21	21	
88/ 87										.0	.2	.1	.1	.2	.0			43	43	
86/ 85						.0		.1	.1	.3	.4	.4	.3	.2	.1	.0		130	130	
84/ 83				.0	.0	.0	.2	.2	.5	.6	.7	.3	.1	.1				192	192	
82/ 81				.0	.0	.1	.2	.3	.5	.6	.7	.5	.2	.1	.0			254	254	
80/ 79				.1	.1	.2	.3	.5	.6	.8	.7	.3	.1	.1				314	314	
78/ 77				.2	.2	.3	.5	.5	1.1	1.1	.8	.3	.2					306	306	
76/ 75				.1	.2	.3	.8	.9	1.3	.9	.8	.4	.1					413	413	6
74/ 73			.0	.2	.5	.5	1.0	1.3	.8	.6	.4	.2	.1					427	427	6
72/ 71		.0	.1	.3	.6	.9	1.2	.9	.8	.6	.3	.1						429	431	25
70/ 69	.0	.1	.2	.6	.8	1.2	1.1	1.0	.6	.4	.3							5[illegible]	2[illegible]	97
68/ 67	.1	.3	.6	.6	1.1	1.4	1.0	.5	.3	.2								456	456	207
66/ 65	.1	.7	.9	1.0	1.0	.5	.7	.4	.2	.1								441	442	376
64/ 63	.3	1.0	1.2	1.5	1.0	.7	.4	.3	.1	.0								481	482	629
62/ 61	.1	1.3	1.4	1.5	.9	.6	.2	.1	.0									456	457	766
60/ 59	.2	1.9	1.8	1.0	.6	.4	.1	.0										514	514	975
58/ 57	.2	1.7	2.2	.9	.5	.3	.1	.0										444	445	924
56/ 55	.2	2.2	1.5	.7	.2	.1	.0											366	366	919
54/ 53	.2	1.7	1.5	.6	.2	.0												314	315	759
52/ 51	.2	2.1	1.0	.5	.1	.0												292	292	576
50/ 49	.3	1.9	.8	.2	.0													238	238	486
48/ 47	.1	.8	.7	.1	.1	.0												134	134	266
46/ 45	.1	.7	.2	.1														82	82	194
44/ 43	.1	.4	.0															42	42	110
42/ 41	.0	.3	.0															30	30	56
40/ 39	.0	.1																13	13	37
38/ 37	.0	.0																2	2	9
36/ 35		.0																2	2	2
34/ 33																				
32/ 31																				
30/ 29																				
28/ 27																				
26/ 25																				

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR FORCE SERVICE/ WEATHER

PSYCHROMETRIC SUMMARY

2

9327 [illegible] AFB / [illegible] STATION NAME | 52-56, 61-72 YEARS | [illegible] MONTH

[illegible] HOURS L.S.T.

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
24/ 23																			
22/ 21																			
20/ 19																			
TOTAL	2,317,419,31	8,2	6,2	8,2	1,2	1,3	0,9	0,3	2,1	3,0	1,3	,7	,3	,2				7455	7439

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	31641410	454918	61,2	22,667	7439							
Dry Bulb	33194700	491350	65,9	10,427	7455			350,6	219,5	71,0		744
Wet Bulb	24322845	422961	56,8	9,074	7439			34,1	1,6			744
Dew Point	18925455	370671	49,8	7,764	7436		19,1	5,0	,3			744

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — CAMP PAGE AAF [illegible] — 51-56, 51-72

STATION NAME — YEARS — MONTH

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew Point
100 / 99															•			1		
98 / 97													•	•						
96 / 95										•	•	•	•	•	•					
94 / 93									•	•	•	•	•	•						
92 / 91						•	•		•	•	•	•	•	•						
90 / 89						•	•	•	•	•	•	•	•	•	•			135	135	
88 / 87						•	•	•	•	•	•	•	•	•	•					
86 / 85					•	•	•	•	•	•	•	•	•	•						
84 / 83					•	•	•	•	•	•	•	•	•							
82 / 81			•	•	•	•	•	•	•	•	•	•	•						2	
80 / 79			•	•	•	•	•	•	•	•	•	•	•					444	3	
78 / 77		•	•	•	•	•	•	•	•	•	•	•								
76 / 75		•	•	•	•	•	•	•	•	•	•									
74 / 73	•	•	•	•	•	•	•	•	•	•										
72 / 71	•	•	•	•	•	•	•	•	•											
70 / 69	•	•	•	•	•	•	•	•												
68 / 67	•	•	•	•	•	•	•													
66 / 65	•	•	•	•	•	•	•													
64 / 63	•	•	•	•	•	•														
62 / 61	•	•	•	•	•															
60 / 59	•	•	•	•																
58 / 57	•	•	•	•																
56 / 55	•	•	•																	
54 / 53	•	•	•																	
52 / 51	•	•	•																	
50 / 49		•	•																	
48 / 47			•																	
46 / 45																				
44 / 43																				
42 / 41																				
40 / 39																				
38 / 37																				
36 / 35																				
34 / 33																				

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

WET BULB TEMPERATURE DEPRESSION °F

Element X	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Re Hum	38e62[illegible]	513936	69.2	19.73	7432							
Dry Bulb	39201956	535642	72.1	20.57	7447			499.2	324.1	164.5	[illegible]	[illegible]
Wet Bulb	31 91337	479143	64.5	5.199	7432			265.1	37.4	.4		[illegible]
Dew Point	27084053	440623	59.1	5.735	7432			86.9	4.5			[illegible]

USAFETAC FORM 0-26-5 (OL-A) Previous Editions are Obsolete

2

DATA PROCESSING BRANCH
USAF ETAC
AIR EAST TERMINAL SVC

PSYCHROMETRIC SUMMARY

43271 STATION NUMBER — CAMP PAGE AAF (KUNSAN/CHINHAE) STATION NAME — 51-54,57,61-72 YEARS — MONTH

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
104/103													.0					1	1		
102/101													.0						2		
100/ 99												.0			.0			2	2		
98/ 97								.0	.1	.1	.1	.0	.0	.0	.0			4	22		
96/ 95						.1	.1	.1	.1	.1	.0	.0		.1	.0			7	7		
94/ 93					.1	.1	.2	.2	.2	.1	.1	.1	.1	.0	.0			14	14		
92/ 91		.0		.0	.1	.2	.7	.9	.3	.2	.1	.0	.0	.0				27	27		
90/ 89		.0	.0	.1	.2	.3	1.2	.7	.4	.2	.2	.1						47	292	1	
88/ 87		.1	.2	.1	.4	1.0	1.2	.5	.3	.2	.1	.0						364	364	4	
86/ 85		.1	.1	.2	1.3	1.2	.2	.2	.4	.1	.1	.0						451	451	4	
84/ 83		.1	.4	1.4	1.6	1.2	.7	.3	.3	.1	.1							530	530	39	3
82/ 81	.1	.2	1.4	1.7	1.4	.9	.7	.3	.1	.0								663	663	76	3
80/ 79	.1	1.2	2.0	2.1	1.3	1.0	.4	.2	.0									662	662	352	6
78/ 77	.3	1.4	2.3	1.5	1.2	.6	.2	.1	.0									822	822	524	26
76/ 75	1.6	4.0	2.3	.4	.3	.4	.3	.1										944	944	1454	955
74/ 73	1.7	3.0	2.0	1.0	.3	.4	.1											799	799	1139	1375
72/ 71	1.7	3.2	1.7	1.0	.7	.2	.1											865	865	1067	1198
70/ 69	1.2	2.1	1.2	1.1	.3	.1	.1											540	540	915	916
68/ 67	.9	2.1	1.1	.6	.3	.1												394	394	675	796
66/ 65	.4	1.2	.5	.3	.1													216	216	509	630
64/ 63	.2	.7	.4	.2	.0													124	124	327	512
62/ 61	.0	.3	.2	.1	.0													46	46	188	412
60/ 59		.1	.1	.0														13	13	109	263
58/ 57	.0	.1	.1															14	14	29	157
56/ 55		.0	.0															4	4	17	111
54/ 53		.0																2	2	11	55
52/ 51		.0																2	2	2	31
50/ 49																				2	11
TOTAL	8.5	24.0	17.1	15.4	10.4	8.9	7.0	4.8	2.6	1.1	.5	.2	.1	.1	.1	.0		7794	7794	7794	7794

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.
Rel. Hum.	493108806	606962	77.9	16.193	7794
Dry Bulb	47271758	604274	77.5	7.359	7794
Wet Bulb	40491569	560399	71.9	5.042	7794
Dew Point	37707944	540274	69.3	2.684	7793

Mean No. of Hours with Temperature

Element (X)	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.			704.4	551.7	274.3	16.8	744
Dry Bulb			630.0	376.4	24.3		744
Wet Bulb			534.3	261.3	6.4		744
Dew Point							

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — STATION — CAPE KENNEDY AP, FLA/CUMBO — STATION NAME — 51-54,57,61-71 — YEARS — ANN — MONTH

PART I — ALL HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
100/ 99									.0	.0								2	2		
98/ 97						.0			.1	.1		.1						12	12		
96/ 95						.0	.1	.2	.1	.1	.1	.1						47	47		
94/ 93					.0	.2	.3	.2	.4	.2	.1	.0						132	133		
92/ 91					.1	.3	.3	1.1	.0	.1	.1	.0						344	344		
90/ 89					.2	1.1	1.3	1.2	.3	.3	.1							566	566		
88/ 87			.0	.1	.9	1.7	1.3	.6	.4	.1								417	417	2	
86/ 85		.0	.2	.7	1.7	1.9	1.3	.7	.3	.0								506	506	5	1
84/ 83		.0	.4	1.0	1.9	1.4	.6	.3	.2									511	511	41	5
82/ 81		.2	1.2	2.1	1.1	1.2	.3	.4	.1									540	540	143	2
80/ 79	.0	1.7	3.1	1.3	1.3	.9	.4	.2	.0									595	595	460	8
78/ 77	.4	4.0	3.0	1.6	.2	.5	.3	.1										646	646	1041	457
76/ 75	1.0	5.8	2.4	1.3	.6	.3	.1	.0										729	729	1461	1115
74/ 73	1.4	4.6	2.1	.9	.3	.1	.0											709	709	1217	1358
72/ 71	1.3	3.6	1.5	.5	.3	.0	.0											559	559	1036	1187
70/ 69	1.0	3.3	1.2	.2	.1	.0												434	434	852	1054
68/ 67	.4	1.4	.5	.2	.1	.0												227	227	523	766
66/ 65	.3	1.0	.3	.1	.1													132	130	320	507
64/ 63	.2	.5	.1	.1														65	65	150	380
62/ 61	.1	.2	.1	.0														34	33	85	237
60/ 59	.1	.1	.0															16	16	42	136
58/ 57	.1	.1	.0															14	14	28	81
56/ 55	.0	.0																3	3	7	37
54/ 53																				4	13
52/ 51																					1
TOTAL	7.1	27.9	19.3	11.1	11.1	9.7	4.1	5.9	2.5	.9	.4	.1						7441		7437	7437
																		14437		7437	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	47470028	582610	78.3	15.082	7437							
Dry Bulb	46416613	585201	78.6	7.214	7441			717.9	525.9	111.5	15.5	744
Wet Bulb	39842754	543288	73.1	4.558	7437			680.4	439.2	39.5		744
Dew Point	37285360	523346	70.6	6.857	7437			604.7	303.2	6.1		744

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

4327 1 — STATION
CAMP PAGE AAF [illegible]/CHICAGO — STATION NAME
51-54, 56-71 — YEARS
5 — MONTH
[illegible] HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
90/ 89							.0											1	1		
88/ 87						.0	.0	.1		.1	.0	.0						17	17		
86/ 85				.1	.1	.1	.1	.3	.2	.1	.0							71	71		
84/ 83				.1	.1	.3	.4	.5	.6	.1	.1							153	155		
82/ 81			.0	.2	.4	.6	.8	1.2	.5	.2	.0							2[illegible]	2[illegible]		
80/ 79			.2	.2	.4	.6	1.1	.7	.8	.2	.1	.0						344	344	1	
78/ 77		.2	.3	.5	.7	1.0	1.4	1.1	.5	.2	.1	.0						431	431	25	2
76/ 75	.0	.2	.5	.6	.9	1.2	1.4	.7	.4	.2								4[illegible]	45[illegible]	91	31
74/ 73	.1	.4	.9	.9	1.2	1.2	.9	.7	.4	.1								[illegible]	40[illegible]	141	62
72/ 71	.4	1.0	1.4	1.1	1.5	.8	.7	.3	.2	.0								5[illegible]	55[illegible]	295	125
70/ 69	.3	1.5	1.6	1.7	1.2	.5	.5	.4	.1	.0								511	511	500	229
68/ 67	.5	2.7	2.1	1.3	.8	.6	.3	.2										6[illegible]	626	751	354
66/ 65	.7	2.9	1.8	1.1	.6	.3	.1	.0										5[illegible]	557	885	5[illegible]
64/ 63	1.6	3.5	1.8	.8	.3	.2	.0											551	551	961	[illegible]3
62/ 61	1.3	4.1	1.1	.5	.2	.1												523	523	993	4[illegible]
60/ 59	1.1	3.2	1.2	.3	.2	.1	.1											442	442	901	949
58/ 57	1.1	2.5	.7	.3	.1	.1												34[illegible]	340	596	865
56/ 55	.6	2.0	.5	.1														229	229	458	824
54/ 53	.5	1.4	.4	.1														1[illegible]	166	281	549
52/ 51	.5	1.3	.2															142	142	198	412
50/ 49	.4	1.0																102	102	161	330
48/ 47	.4	.7																75	75	106	25[illegible]
46/ 45	.3	.2																37	37	52	175
44/ 43	.1	.1																11	11	16	6[illegible]
42/ 41	.1	.1																[illegible]	12	14	3[illegible]
40/ 39	.0																	2	2	2	17
38/ 37																					4
36/ 35																					1
34/ 33																					1
TOTAL	9.3	29.0	15.0	9.9	8.7	8.3	8.1	6.2	3.7	1.2	.3	.1						7226		7226	
																	7226		7226	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	43906515	547183	75.7	18.495	7226							
Dry Bulb	33612321	488077	67.6	8.837	7226			402.0	223.1	66.0		720
Wet Bulb	28124434	448272	62.1	6.205	7226			177.6	22.[illegible]			720
Dew Point	25194963	423973	58.7	6.641	7226			80.0	9.5			720

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

4327 — STATION
CAPE PAGE AAF, UNALASKA/CHUGACH — STATION NAME
21-54,2-60-71 — YEARS
OCT — MONTH
ALL — HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
82 / 81							.0	.0	.0	.1	.0	.0						14			
80 / 79							.0	.1	.1	.0	.0	.0						22	22		
78 / 77						.0	.1	.1	.1	.1	.1	.1						55	55		
76 / 75					.0	.1	.4	.3	.3	.2	.0							92	92		
74 / 73					.0	.3	.5	.5	.5	.1	.0							151	151		
72 / 71			.0	.0	.2	.5	.6	.2	.2	.2	.0	.0						231	231		
70 / 69			.0	.2	.7	.9	.8	1.0	.6	.2								337	337	1	
68 / 67		.0	.2	.4	.9	.8	.9	.9	.5	.2	.0							157	157	17	
66 / 65		.1	.4	.6	.7	1.2	1.2	.8	.4	.0	.0							417	417	49	6
64 / 63		.3	.6	.6	.9	1.3	.9	.6	.3	.0								425	425	105	2
62 / 61	.1	.6	.6	.2	1.2	1.2	.6	.4	.1	.0								317	317	57	
60 / 59	.3	1.0	1.1	1.3	1.1	.8	.3	.1	.1									474	474	426	155
58 / 57	.1	1.0	1.2	1.1	1.0	.6	.3	.1	.1									469	469	530	249
56 / 55	.5	2.3	1.7	.9	.7	.4	.3	.2	.0									305	305	739	390
54 / 53	.8	2.0	1.5	.8	.4	.2	.2	.0										497	497	854	528
52 / 51	.7	2.6	1.4	.8	.2	.2	.1											456	456	777	639
50 / 49	1.0	3.0	1.0	.4	.2	.2	.0											443	443	735	690
48 / 47	.9	3.5	.8	.3	.1	.1	.1											441	441	624	726
46 / 45	1.2	2.9	.4	.2	.1	.0												374	375	571	820
44 / 43	1.0	2.3	.2	.1	.0	.0												334	340	474	715
42 / 41	1.2	2.0	.3	.1	.1	.0												265	266	372	622
40 / 39	1.3	1.8	.2		.1													252	253	293	552
38 / 37	.9	.9	.1	.1	.0													156	161	234	390
36 / 35	.5	.3	.1	.0														101	104	120	254
34 / 33	.4	.5	.0															64	65	90	230
32 / 31	.2	.2																31	31	57	158
30 / 29	.1	.1																13	18	26	101
28 / 27	.0	.0																2	2	6	69
26 / 25																					37
24 / 23																					24
22 / 21																					19
20 / 19																					20
18 / 17																					12
16 / 15																					1

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 CAPE MAY AAF FIELD/CHERRY 51-53, 55-60-71 1
STATION STATION NAME YEARS MONTH

HOURS ALL

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Po
14/ 13																			
T-L	11.7	24.0	11.2	7.4	5.0	3.4	2.6	1.4	3.5	1.0	.2	.1						7477	7477

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	42390078	539872	72.2	21.354	7477							
Dry Bulb	24013014	417056	55.6	10.486	7501		5.1	127.2	33.4	2.3		744
Wet Bulb	19254577	379409	50.2	7.368	7477		8.9	1.8				744
Dew Point	15853944	339296	45.4	7.816	7477		44.2					744

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

[redacted] CAMP PAGE AAF KOREA/CHUCHEON 51-54,61-71
STATION NUMBER STATION NAME YEARS MONTH

HOURS (L.S.T.) ALL

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew Point
70/ 69							.0											1	0	
68/ 67						.0	.0		.0									1	1	
66/ 65					.1	.1	.1	.1	.1	.0								11	10	
64/ 63			.0	.0	.2	.4	.2	.2	.1	.0								17	15	
62/ 61				.1	.3	.3	.4	.2	.0									27	26	
60/ 59		.0	.1	.5	.7	.6	.4	.2	.0									127	107	4
58/ 57		.1	.3	.6	.7	.7	.5	.3	.1									215	215	13	2
56/ 55		.2	.3	.7	.7	.5	.2	.1	.1									254	254	66	7
54/ 53		.5	.9	.8	.9	.5	.2	.1										268	268	191	26
52/ 51	.2	.9	1.5	.9	.2	.0	.3	.1										355	355	249	77
50/ 49	.1	2.0	1.5	1.1	.8	.9	.3	.0										472	472	349	127
48/ 47	.3	2.1	1.1	1.0	1.0	.4	.2	.0										410	412	432	215
46/ 45	.4	2.6	1.2	1.2	.6	.4	.3											446	446	529	367
44/ 43	.9	2.9	1.5	.9	.7	.0	.2											521	521	551	431
42/ 41	1.5	2.0	1.2	1.0	.4	.4												499	499	580	478
40/ 39	1.3	2.7	1.2	1.0	.7	.1	.0											472	473	607	505
38/ 37	1.3	2.5	1.0	.9	.6	.0												419	422	518	508
36/ 35	1.6	2.5	1.1	.8	.4	.0												433	436	504	511
34/ 33	1.2	2.4	.8	.6	.2													347	352	459	491
32/ 31	.9	2.2	1.0	.6	.0													312	316	419	422
30/ 29	.7	2.0	.9	.4	.0													274	275	351	427
28/ 27	.5	1.5	.5	.3	.0													193	193	265	359
26/ 25	.4	1.4	.3	.1														145	145	221	292
24/ 23	.2	.7	.3	.0														84	85	164	265
22/ 21	.1	.5	.1	.0														51	51	89	225
20/ 19		.4	.1															33	33	52	191
18/ 17	.0	.4	.1															35	35	36	162
16/ 15	.0	.0	.1															10	10	27	145
14/ 13	.0	.1	.1															13	13	13	120
12/ 11	.0	.1	.0															8	6	9	104
10/ 9	.1																	4	4	13	73
8/ 7																					46
6/ 5																					34
4/ 3																					15

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 CAMP PAGE AAF [illegible] (CHU) 51-54, 66-71 [illegible]
STATION STATION NAME YEARS MONTH

[illegible] ALL
HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
2/ 1																			1
0/ -1																			11
-2/ -3																			
-4/ -5																			1
-6/ -7																			
-12/-13																			1
TOTAL	11	833	710	914	2	1	7.2	3.9	1.8	.4	.0							6726	6691
																		6691	6691

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	370173 88	477924	71.42	20.749	6691							
Dry Bulb	128300 79	285663	42.5	10.185	6726		124.8	.9				720
Wet Bulb	10402 364	257452	38.5	8.613	6691		180.7					720
Dew Point	7896 773	218544	32.7	10.649	6691	3.2	318.1					720

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP PAGE AAF MINEARCH CHN — STATION NAME
01-53,55-71 — YEARS
MONTH
HOURS

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew Point
62/ 61					.0													7		
60/ 59			.0		.0													4		
58/ 57	.0	.0	.0	.0														7	7	2
56/ 55			.0	.1	.0	.0	.0											14	14	3	3
54/ 53			.1	.1	.1	.0	.0											26	26	6	2
52/ 51		.0	.2	.1	.1	.1	.0	.0										36	36	9	4
50/ 49		.1	.2	.3	.2	.1	.0											47	47	17	3
48/ 47	.0	.3	.3	.4	.3	.1												56	56	25	7
46/ 45	.1	.2	.4	.6	.5	.2												121	121	56	12
44/ 43	.2	.4	.7	.9	.4	.2	.1											175	175	92	31
42/ 41	.2	.6	1.0	.4	.4	.2												217	217	139	58
40/ 39	.3	1.2	1.5	1.3	.6	.1												332	332	165	73
38/ 37	.2	1.3	1.7	1.7	.4	.0												377	377	310	99
36/ 35	.7	2.8	2.6	1.9	.4													516	516	352	137
34/ 33	.9	2.9	2.2	1.3	.4													517	516	506	298
32/ 31	1.0	3.3	2.3	1.2	.2													513	513	524	307
30/ 29	.8	3.6	2.4	1.2	.1													559	559	559	309
28/ 27	.7	3.0	2.2	.8	.1													573	573	574	360
26/ 25	.9	3.1	1.9	.7														439	439	549	434
24/ 23	.9	3.1	1.4	.4														391	391	507	495
22/ 21	.7	3.4	1.2	.2														362	362	411	472
20/ 19	1.0	3.1	.9	.1														335	336	455	385
18/ 17	.6	2.3	.5															229	229	316	421
16/ 15	.9	1.6	.4															194	194	248	442
14/ 13	.7	1.7	.2															175	176	191	405
12/ 11	.5	1.2	.2															123	125	159	306
10/ 9	.3	.9	.0															85	85	120	257
8/ 7	.2	.2																42	40	65	235
6/ 5	.2	.3																44	36	50	176
4/ 3	.1	.3																23	23	25	153
2/ 1		.1																4	6	13	105
0/ -1		.0																1	1	4	103
-2/ -3	.0																	1	1	1	74
-4/ -5	.0																	3	3	3	52

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

13271 — STATION
CAPE PROUD AMB — STATION NAME
51-56 — YEARS
1 — MONTH
ALL — HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																											TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31												
-6/-7																												44	
-8/-9																												37	
-10/-11																												2[illegible]	
-12/-13																												1[illegible]	
-14/-15																												11	
-16/-17																												4	
TOTAL	12,742	724,014	4.4	.n	.1	.0																						6584	

65-5 c355

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	34343636	461158	70.0	17.645	6585							
Dry Bulb	6250229	192605	29.2	9.726	6593	.6	464.3					744
Wet Bulb	5138642	174866	26.6	8.845	6585	.9	555.7					744
Dew Point	3445853	130925	19.9	11.245	6584	61.4	653.3					744

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING [illegible]
USAF ETAC
AIR WEATHER SERVICE / MAC

PSYCHROMETRIC SUMMARY

43271 [illegible] AFB, [illegible] (Co. Cpd.) [illegible] 1 [illegible]
STATION STATION NAME YEARS MONTH

[illegible] HOURS [illegible]

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
48/ 47				.4														1		
42/ 41																			1	
40/ 39		.4																		
38/ 37		.4																2		
36/ 35		1.3	1.7															2	2	2
34/ 33	.4	4.1																11	11	7	2
32/ 31	.4	5.1	1.3															17	17	14	3
30/ 29		1.7	1.7																	11	3
28/ 27		8.3	.8															9	22	19	7
26/ 25	.4	4.7	4.1	.4														14	19	22	5
24/ 23		5.1	1.7	1.3														8	13	14	14
22/ 21	.4	6.4	3.0	.4														4	24	13	9
20/ 19		7.6	.8	.4															2	2	12
18/ 17	1.7	7.2	3.0	.8															3	22	13
16/ 15	.4	4.7	.8																14	19	11
14/ 13		3.4																4	4	19	12
12/ 11		1.7																	9	7	11
10/ 9		1.7																	4	5	12
8/ 7		.9																	0	3	9
6/ 5	1.3	4.2																13	13	11	4
4/ 3	.4	.8																4	3	3	12
2/ 1	.8	.4																3	3	3	11
0/ -1																				1	11
-2/ -3																					4
-4/ -5																					1
-6/ -7																					3
-8/ -9																					2
-12/-13																					1
-14/-15																					1
-16/-17																					2
TOTAL	6.8	72.0	16.9	4.2														236	236	236	236

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1706441	10325	70.0	14.490	236							
Dry Bulb	126905	2089	21.6	8.547	236		83.9					93
Wet Bulb	108436	4666	19.8	8.299	236	.4	88.3					93
Dew Point	68905	3023	12.8	11.239	236	15.0	91.4					93

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 (CAMP PAGE AAF (FREE)/CHICHI) 52-54,61-62,64-67,70-71 (1)
STATION NUMBER (STATION NAME) YEARS MONTH

(0400-0700) HOURS (LST)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
44/ 43			.4															1	1		
42/ 41		.4																1	1		
40/ 39			.4															1	1	2	
38/ 37		.4	.8															2	2	1	1
36/ 35	.2	1.5	.5															11	11	5	
34/ 33	.2	1.1																11	11	12	7
32/ 31	.4	3.7	.4															24	24	16	
30/ 29	.6	4.6	.6															29	29	25	17
28/ 27	.7	4.1	.7															33	33	32	24
26/ 25	.6	4.1	.7															29	29	23	26
24/ 23	1.1	3.9	1.0	.4														39	39	31	21
22/ 21	.7	5.7	.9															41	41	32	22
20/ 19	1.3	6.1	.9															45	45	50	1
18/ 17	1.4	5.0	.4															25	25	30	24
16/ 15	.9	5.9	1.3															41	41	23	41
14/ 13	1.3	6.7	.4															45	45	47	25
12/ 11	2.2	2.6	.8															30	30	51	1
10/ 9	.9	3.9																26	26	26	24
8/ 7	1.3	1.8																17	17	21	31
6/ 5	2.2	2.0																27	27	25	41
4/ 3	.2	2.2																13	13	17	23
2/ 1	1.7	1.7																18	18	18	23
0/ -1	1.1	1.1																14	17	17	14
-2/ -3	1.1	.6																3	5	10	21
-4/ -5	.9																	5	5	6	25
-6/ -7	.2																	3	3	3	19
-8/ -9	.2																	1	1	1	17
-10/-11	.2																	1	1	1	12
-12/-13																					7
-14/-15																					5
-16/-17																					4
-18/-19																					1
-20/-21																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
SAT ETAC
AIR WEATHER SERVICE / MAC

PSYCHROMETRIC SUMMARY

6427th
STATION

[illegible] AIR FORCE BASE [illegible]
STATION NAME

52-54; 61-64; 70-71
YEARS

MONTH

WET BULB TEMPERATURE DEPRESSION (F)

Temp. (F)	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B.	TOTAL W.B.	TOTAL Dew Point
[illegible]	[illegible]																			541

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3073843	40123	74.2	13.481	541							
Dry Bulb	216305	9333	17.2	10.137	542	6.2	38.4					9
Wet Bulb	191832	8694	16.1	9.824	541	6.5	89.6					9
Dew Point	133250	5452	10.1	12.066	541	20.6	91.3					9

FORM 0-26-5 (OL A) JUL 64 USAFETAC

REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
SCOTT AIR FORCE BASE, IL 62225

PSYCHROMETRIC SUMMARY

43271 — C A P PAGE AAF — STATION NAME — 52-54, 71-72 — YEARS — MONTH — HOURS

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
42/ 41				.1														1	1		
40/ 39			.4																4		
38/ 37		.4	.3																7		
36/ 35	.6	.9	.4															2	12	16	1
34/ 33	.5	2.2	.5															11	42	23	13
32/ 31	.8	2.4	.4	.1														47	45	42	39
30/ 29	1.0	3.5	.4															73	65	59	51
28/ 27	1.3	2.1	.6															90	91	82	67
26/ 25	.9	3.3	1.2															124	124	95	44
24/ 23	1.4	2.8	.4	.1														63	82	61	61
22/ 21	1.3	3.7	.5	.1														76	77	66	36
20/ 19	1.3	4.9	.5															74	75	77	41
18/ 17	.8	4.4	.6															73	74	78	47
16/ 15	1.9	5.2	.2															60	80	75	69
14/ 13	2.1	4.1	.2															91	91	90	64
12/ 11	1.7	4.9	.5															93	93	83	74
10/ 9	2.2	3.3	.2															73	73	92	57
8/ 7	3.1	3.0	.2															77	79	83	72
6/ 5	2.1	2.1																63	63	68	50
4/ 3	1.9	2.1																46	46	56	68
2/ 1	2.2	1.2																43	43	44	53
0/ -1	2.2	1.2																52	52	50	54
-2/ -3	2.5	.3																34	30	44	47
-4/ -5	1.8	.2																25	25	26	72
-6/ -7	.4	.2																7	8	7	55
-8/ -9	.5																	6	6	7	47
-10/-11	1.0	.1																14	14	14	22
-12/-13																					17
-14/-15																					21
-16/-17																					7
-18/-19																					10
TOTAL	35.3	56.9	7.6	.3															1270		1270
																		1270		1270	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7009101	96957	76.3	12.772	1270							
Dry Bulb	452296	19482	15.2	11.036	1280	10.2	87.7					93
Wet Bulb	399371	18013	14.2	10.648	1270	10.8	90.0					93
Dew Point	295305	11153	8.8	12.477	1270	25.8	91.8					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[illegible] | [illegible] | 52-56, 61-72 | [illegible]
STATION NUMBER | STATION NAME | YEARS | MONTH

[illegible] | [illegible] | 0000-1200
NO. OBS | [illegible] | HOURS

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
44/ 43				.1														1		1	
42/ 41			.1	.6	.3													[illegible]	[illegible]	[illegible]	
40/ 39			.3	.4	.2													[illegible]	12	2	
38/ 37	.1	.4	.1	.3														11	11	9	3
36/ 35	.2	1.1	1.6	.7														47	47	34	6
34/ 33	.3	2.0	.7	.3														93	97	46	21
32/ 31	.4	2.1	1.0	.1														[illegible]	[illegible]	56	31
30/ 29	.3	2.3	.2															93	96	64	50
28/ 27	1.1	3.2	1.3	.2														74	75	69	54
26/ 25	1.3	4.5	1.7	.3														[illegible]	[illegible]	89	70
24/ 23	1.2	4.4	1.3	.4														[illegible]	[illegible]	91	77
22/ 21	1.3	4.2	1.4	.2														95	96	93	82
20/ 19	1.0	4.1	1.3	.2														[illegible]	[illegible]	[illegible]	86
18/ 17	1.2	4.0	1.2	.1														[illegible]	[illegible]	91	87
16/ 15	1.5	5.4	.6															[illegible]	96	96	94
14/ 13	1.4	3.9	.2															[illegible]	96	99	96
12/ 11	.2	3.3	.5															[illegible]	60	63	61
10/ 9	1.5	2.1	.2															[illegible]	61	70	69
8/ 7	1.7	2.3	.1															[illegible]	57	56	61
6/ 5	1.5	2.1																44	44	47	72
4/ 3	1.1	1.3																[illegible]	30	46	78
2/ 1	1.2	.8																25	25	31	51
0/ -1	1.3	.3																21	21	22	51
-2/ -3	.9	.2																14	14	13	44
-4/ -5	.5																	[illegible]	6	8	31
-6/ -7	.6	.1																[illegible]	[illegible]	[illegible]	[illegible]
-8/ -9	.2																	3	3	3	2
-10/-11	.2																	2	2	2	11
-12/-13																					1
-14/-15																					[illegible]
-16/-17																					[illegible]
-18/-19																					1
TOTAL	23.5	56.9	14.6	3.0														1270		1270	1270

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7124920	93400	73.5	14.203	1270							
Dry Bulb	613739	24097	19.3	10.330	1278	3.8	62.7					93
Wet Bulb	524486	22610	17.8	9.823	1270	4.0	87.5					51
Dew Point	349469	19930	11.6	11.708	1270	17.6	91.1					

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

[illegible] [illegible] AIR FORCE STATION [illegible] STATION NAME

52-54, 71-72 YEARS

[illegible] MONTH

[illegible] HOURS

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew Point
50/ 49				.1														1		
48/ 47			.1	.2	.2	.1														
46/ 45				.2	.2													4	1	
44/ 43			.4	.2	.0	.1												14	1	
42/ 41	.1	.1	.4	1.4	.0	.3												7	4	
40/ 39		.5	1.0	1.7	1.1	.1												34	15	
38/ 37	.2	1.2	1.9	2.7	.2	.2												7	79	41
36/ 35	.2	1.7	3.9	1.6	.0	.1												1	124	54
34/ 33	.1	1.0	2.5	2.0	.2	.1												0	0	84
32/ 31	.2	2.9	3.5	2.9	.3													124	126	119
30/ 29	.5	2.5	4.5	2.3	.3													131	131	110
28/ 27	.2	2.7	3.5	2.5	.1													111	111	108
26/ 25	.2	1.5	4.3	2.5														117	117	114
24/ 23	.3	2.2	2.5	1.0														75	75	105
22/ 21	.2	1.0	2.9	.4														69	69	111
20/ 19	.2	2.3	2.7	.9														49	53	92
18/ 17	.1	2.5	1.4	.2														22	54	74
16/ 15	.1	1.2	1.1															30	30	62
14/ 13	.2	1.3	.5															27	27	43
12/ 11	.1	1.3	.2															26	26	32
10/ 9	.1	.7	.2															13	13	21
8/ 7		.5																8	8	15
6/ 5	.1																	2	2	7
4/ 3		.1																1	1	
2/ 1		.1																1	1	2
0/ -1																				
-2/ -3																				
-4/ -5																				
-6/ -7																				
-8/ -9																				
-10/-11																				
-12/-13																				
-14/-15																				
-16/-17																				

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

63271 — STATION
CAPE HOPE ARP [illegible]/CAN (ONT.) — STATION NAME
[illegible]-54,61-72 — YEARS
1 — MONTH

HOURS [illegible] 1200-1400

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
-17/-19																			
-20/-21																			
TOTAL	[illegible]																	1242	1242

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4724876	73742	59.4	16.711	1242							
Dry Bulb	1087200	35318	28.4	8.260	1244		63.3					
Wet Bulb	837469	30461	24.5	7.545	1242		78.0					
Dew Point	439931	18811	15.1	11.177	1242	10.2	89.0					

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

4127 (WRIGHT-PATT AFB - INTERNATIONAL) 52-58,61-72 JAN
STATION NAME YEARS MONTH

1100-1700
HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31				
52/ 51					.1													1	1		
50/ 49				.1	.1													2	2		
48/ 47		.2	.1	.3		.2												7	7		
46/ 45		.1		.5	.5	.3												17	17	4	1
44/ 43			.3	.3	.7	.3												25	25	3	1
42/ 41		.1	.3	1.0	1.0	.2												42	42	3	
40/ 39		.5	1.9	3.3	2.3	.7	.1											136	136	12	3
38/ 37		1.1	2.9	3.3	1.7	.3												112	112	39	4
36/ 35		1.4	2.0	2.0	1.2	.3												94	94	82	6
34/ 33	.2	1.0	2.9	2.5	2.0													133	133	114	22
32/ 31		1.5	4.1	4.7	1.3													140	140	116	44
30/ 29	.3	1.9	3.0	3.0	.7													113	113	123	41
28/ 27	.4	.9	4.1	2.2	.4													94	94	142	66
26/ 25		1.4	2.7	1.7														71	71	132	72
24/ 23		.3	2.3	1.7														51	51	116	54
22/ 21	.1	1.3	1.2	.2														59	59	63	76
20/ 19	.1	1.1	1.0	.1														44	44	57	71
18/ 17		1.1	1.2	.1														24	24	55	72
16/ 15	.1	1.1	.4															21	21	53	103
14/ 13		.3	.5															10	10	20	51
12/ 11		.6	.3															12	12	11	63
10/ 9		.3	.1															7	7	13	63
8/ 7		.1																1	1	7	53
6/ 5																				1	50
4/ 3																					51
2/ 1																					35
0/ -1																					35
-2/ -3																					27
-4/ -5																					24
-6/ -7																					14
-8/ -9																					9
-10/-11																					11
-12/-13																					3
-14/-15																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — CAPE PAGE A/P [illegible] — 52-56,61-76 — JUL

STATION NAME — YEARS — MONTH

HOURS 1500-1700

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B.	TOTAL W.B.	Dry Bulb	Wet Bulb	Dew Po
-18/-19																						
-20/-21																						
TOTAL	1,217,734,332,[illegible]2.5 2,[illegible] .1																	1186	1186			
																		1186	1186			

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3[illegible]04374	64296	54.2	16.400	1186							
Dry Bulb	1209012	36762	31.0	7.659	1186		51.4					93
Wet Bulb	[illegible]95323	31239	26.6	6.912	1186		72.9					93
Dew Point	420123	18261	15.4	10.829	1186	9.7	90.1					93

USAFETAC FORM 0-26-5 (OL-A) JUL 64 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

43271 | [illegible] PAGE AAF [illegible] | [illegible]
STATION | STATION NAME | YEARS

[illegible] 1 60-2000
HOURS

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
48/ 47				•														1	1		
46/ 45			•	•														2	6		
44/ 43			•	•	•													4	4		
42/ 41				•	•													5	5	2	
40/ 39			•	•														6	7		
38/ 37		•	4	•														22	22	1	1
36/ 35		2	3	•	•													46	46	14	1
34/ 33	•	3	3	1	•													71	71	25	2
32/ 31		4	4	2	•													96	96	51	15
30/ 29	•	3	4	2	•													96	96	92	32
28/ 27	•	4	5	1	•													91	91	66	29
26/ 25		2	4	2	•													56	56	76	70
24/ 23	•	1	4	1														35	35	55	27
22/ 21	•	2	1	1														25	25	56	46
20/ 19		2	2	•														23	23	33	34
18/ 17		2	1	•														10	10	23	26
16/ 15		2	•															19	19	30	31
14/ 13	•	2	•															17	17	17	26
12/ 11		1	•															7	7	14	17
10/ 9		•																4	4	11	23
8/ 7		•	•															3	3	7	20
6/ 5																				3	24
4/ 3																				1	15
2/ 1																					22
0/ -1																					13
-2/ -3																					11
-4/ -5																					6
-6/ -7																					3
-8/ -9																					2
-10/-11																					1
-12/-13																					1
-14/-15																					•
-16/-17																					•
-18/-19																					•

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
SAC ETAC
AIR EAST[illegible] SERVICE/MAC

PSYCHROMETRIC SUMMARY

[illegible] CAPE PAGE AFB MISSOURI/CENTCOM — 52-54,57-67 (YEARS)

[illegible] 1200-2200

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	TOTAL W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
-20/-21																				
TOTAL	2,256,739,61[illegible]1 2,9																			

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2130182	32144	61,8	16,610	520		70,5					93
Dry Bulb	417676	14244	27,4	7,279	520		93,2					93
Wet Bulb	330941	12619	24,3	6,900	520	9,3	91,7					93
Dew Point	181186	7906	15,2	10,840	520							93

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 CAPE PAGE AAF (HELA/CE) (CM) 5-58
STATION NAME YEARS MONTH

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
44/ 43			.4																	1		
40/ 39		.4	.4																	1	1	
38/ 37		.4	.4																	2	2	
36/ 35		1.3	1.7																	3	4	1
34/ 33		4.3	1.3																	13	13	2
32/ 31	.9	6.4	3.4	.4																26	16	1
30/ 29		6.9	4.3																	26	21	7
28/ 27		3.7	1.7	.4																13	22	13
26/ 25		7.3	3.4	.9																27	17	21
24/ 23	.4	5.6	4.7																	27	25	7
22/ 21		6.0	3.4	.9																26	23	12
20/ 19		5.2	3.4	.4																21	23	17
18/ 17		1.7	.9	.4																7	14	13
16/ 15		2.6																		6	15	17
14/ 13		1.3																		3	7	16
12/ 11	.9	2.1	.9																	5	6	16
10/ 9	.4	3.0																		4	7	14
8/ 7	1.3	2.1																		4	12	13
6/ 5	.4	.4																2		4	5	16
4/ 3		.4																1		1		15
2/ 1																					1	7
0/ -1																						5
-2/ -3																						7
-4/ -5																						4
-6/ -7																						3
-8/ -9																						1
-14/-15																						1
-18/-19																						1
-20/-21																						1
TOTAL	4.3	61.4	30.9	3.4														233		233		233

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	1114287	19735	84.7	14.924	233							
Dry Bulb	149490	5614	24.1	7.030	233		82.6					93
Wet Bulb	125239	5103	21.9	7.021	233		87.8					93
Dew Point	76139	3337	14.3	11.053	233	12.4	91.8					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAPE PAGE AFB ARKANSAS 22-52 12
STATION NAME YEARS MONTH

HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew P
44/ 43			.4	.4															2		
42/ 41	.8			.8														4	4	3	
40/ 39	1.2	1.2		.4														7	7	4	
38/ 37			.8	.4														4	4	7	
36/ 35		4.7	2.0															17	17	4	
34/ 33	2.8	4.3	1.2															15	15	19	
32/ 31	2.8	4.7	1.2															21	21	20	16
30/ 29		3.9	1.2	.4														16	16	16	17
28/ 27		4.7	2.4	.8														20	20	13	12
26/ 25		4.7	1.2															15	15	21	14
24/ 23		4.7	2.7	.4														21	21	14	
22/ 21		3.5	2.7	.4														17	17	20	9
20/ 19		7.5	3.9															27	29	16	1
18/ 17		3.5	1.2															12	12	23	1
16/ 15	.4	3.9	1.2															14	14	16	1
14/ 13	.4	5.5	1.2															18	18	17	17
12/ 11		2.0																5	5	13	15
10/ 9	.8	3.5																11	11	14	7
8/ 7	1.2	1.2																4	6	8	1
6/ 5																				2	21
4/ 3																					1
2/ 1																					14
0/ -1																					11
-2/ -3																					4
-4/ -5																					
-6/ -7																					4
-8/ -9																					1
TOTAL	8.6	64.7	24.3	2.4														255		255	255

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1343072	18140	71.1	14.478	255							
Dry Bulb	169290	6192	24.3	8.634	255		66.9					
Wet Bulb	146754	5708	22.4	8.045	255		71.8					
Dew Point	98961	4043	15.9	11.715	255	6.9	77.4					

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
SAT ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

4327th — CAMP PAGE AAF (GREENVILLE-F) — 52-54, 61, 64-67, 70-71 — F — 0700-0900
STATION — STATION NAME — YEARS — MONTH — HOURS (L.S.T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
44/ 43		.2		.2														2	2		
42/ 41		.4																2	2	1	
40/ 39	.2	1.2	.6															11	11	3	
38/ 37		1.2	.6															3	3	9	
36/ 35	.6	4.0	1.0															26	26	13	
34/ 33	1.2	3.4	.4															24	24	36	27
32/ 31	1.4	2.6	.4															22	22	20	21
30/ 29	.4	3.2	.6															22	22	12	24
28/ 27	.8	5.2	2.2															43	43	30	21
26/ 25	1.2	6.5	2.2															42	42	37	17
24/ 23	.8	7.3	1.0															45	45	53	2
22/ 21	1.2	2.0	1.0															24	24	41	6
20/ 19	1.0	5.2	1.2															37	37	31	29
18/ 17	.4	4.0	.4															28	28	28	38
16/ 15	.4	3.6	.2															21	21	30	33
14/ 13	.2	4.4	.6															25	25	26	16
12/ 11	.4	2.4	.2															13	13	25	27
10/ 9	1.2	2.2	.2															15	15	21	17
8/ 7	1.8	5.4																26	26	21	35
6/ 5	2.2	1.6																15	15	24	24
4/ 3	1.4	1.4																14	14	14	19
2/ 1		.2																1	1	5	22
0/ -1		.2																1	1	1	22
-2/ -3		.2																1	1	1	14
-4/ -5																				1	3
-6/ -7	.2																	1	1	1	2
-8/ -9																					1
-10/-11																					4
-12/-13																					4
-14/-15																					2
-16/-17																					1
-18/-19																					1
TOTAL	17.9	69.0	12.9	.2														496	496		496
																		496		496	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2955644	37184	74.2	12.501	496							
Dry Bulb	283412	10832	21.8	9.729	496	.5	70.6					84
Wet Bulb	253006	10164	20.5	9.506	496	.7	73.7					84
Dew Point	183853	7593	15.2	11.793	496	10.0	77.9					84

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 STATION NUMBER | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 22-Sep 61-72 YEARS | [illegible] MONTH

[illegible] 2000-[illegible] HOURS


Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Pt.
44/ 43	.1	.1																	2	1	
42/ 41	.1																		1	2	
40/ 39		.4	1.0																1	3	
38/ 37		.2	.2	.1		.1													1	4	
36/ 35	.2	1.0	1.1																4	5	
34/ 33	1.2	3.3	1.1																6	16	26
32/ 31	.1	1.9	1.3																3	4	5
30/ 29	.2	4.0	1.0																6	16	51
28/ 27	1.3	4.4	.5																7	17	47
26/ 25	2.1	4.0	1.3	.1															7	24	32
24/ 23	1.1	5.4	.6	.1															8	25	42
22/ 21	1.2	5.1	.4																7	25	37
20/ 19	1.8	5.5	.5																8	33	66
18/ 17	1.3	4.0	.3																11	11	62
16/ 15	2.3	4.8	.4																13	13	80
14/ 13	1.4	2.8	.3																21	21	63
12/ 11	1.6	3.2	.1																26	26	58
10/ 9	1.2	3.4	.1																24	24	54
8/ 7	2.1	3.0																	29	29	66
6/ 5	2.4	1.2	.2																45	48	61
4/ 3	1.4	1.6	.1																35	35	37
2/ 1	1.2	.2																	21	21	25
0/ -1	.3	.3																	6	6	12
-2/ -3	.2	.3																	6	6	3
-4/ -5		.1																	1	1	2
-6/ -7	.3																		3	3	3
-8/ -9	.2																		6	6	12
-10/-11	.1																		1	1	1
-12/-13	.1																		1	1	1
-14/-15																					2
-16/-17																					1
-18/-19																					1
-20/-21																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISE PREVIOUS EDITIONS WHICH ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

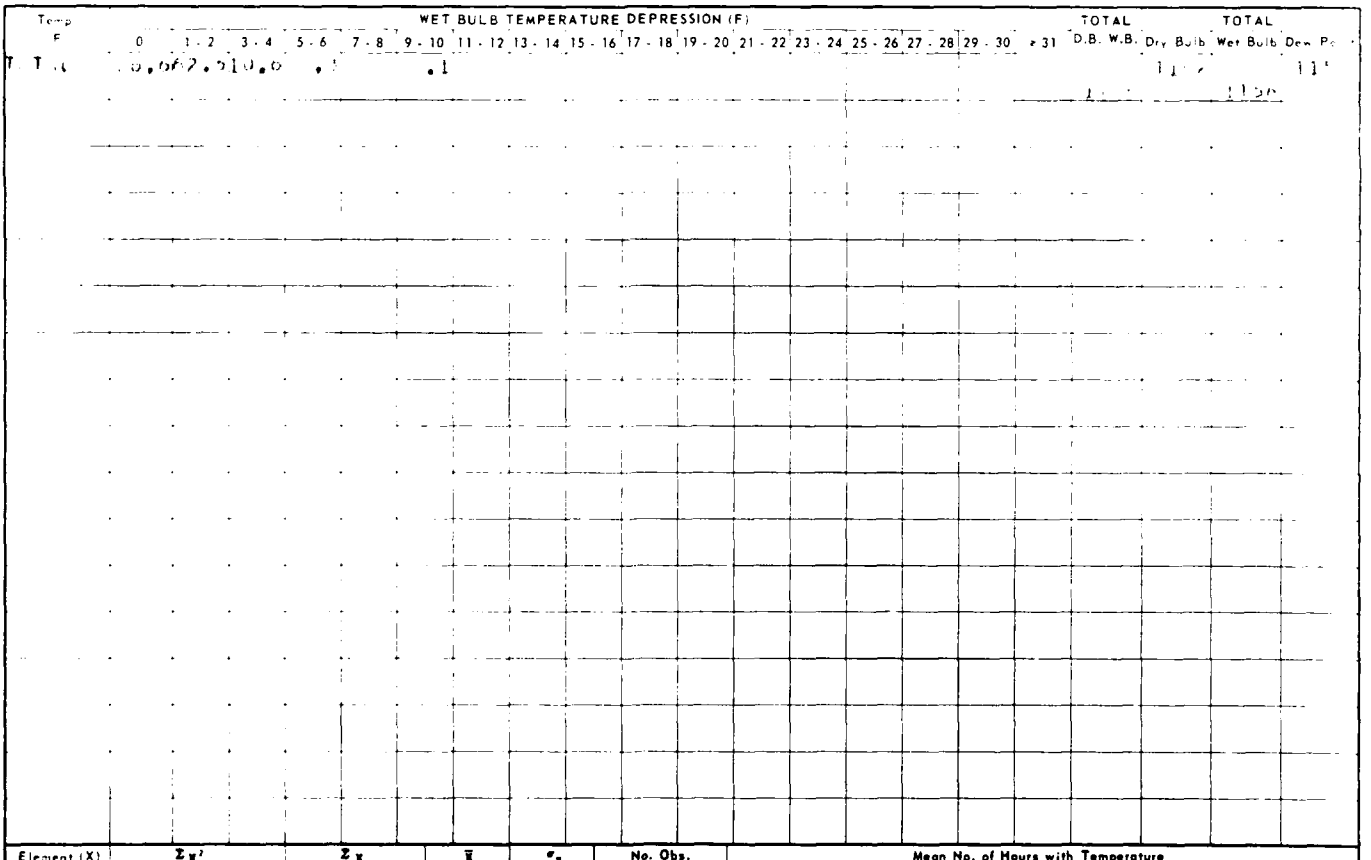

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7228900	90382	78,2	11,857	1156							
Dry Bulb	580486	23124	19,9	10,180	1162	1,7	73,6					84
Wet Bulb	516858	21630	18,7	9,853	1156	2,3	77,5					84
Dew Point	378910	10118	13,9	11,554	1156	11,2	80,7					84

USAFETAC FORM 0-26-5 (OL A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE / MAC

2

PSYCHROMETRIC SUMMARY

44671 STATION | [illegible] AFB, [illegible] STATION NAME | 52-59, 61-76 YEARS | 1 MONTH

[illegible] 0001-1200 HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew P.
46/ 45				.1																1		
44/ 43			.3	.3	.1															1		
42/ 41			.2	.4	.1															1		
40/ 39	.2	.5	.7	.3	.1	.1														2		
38/ 37	.3	2.2	.4	.3	.2															3		
36/ 35	.2	2.2	3.4	.7	.1															6	7	4
34/ 33	.3	2.8	4.7	.9	.2															9	8	4
32/ 31	.3	4.2	1.7	1.1	.2															9	9	8
30/ 29		4.9	3.1	.6																10	10	8
28/ 27	.5	4.1	2.3	.3	.1															8	8	10
26/ 25	1.1	5.3	1.7	.3	.2															9	11	11
24/ 23	.8	4.1	1.7	.3																8	8	10
22/ 21	.3	4.1	1.7	.2																7	7	7
20/ 19	.6	2.9	2.2	.2																6	6	7
18/ 17	.7	4.7	.7																	7	7	8
16/ 15	.5	2.3	.5																	4	5	6
14/ 13	.4	3.3	.4																	5	5	6
12/ 11	.2	2.1	.2																	3	3	6
10/ 9	1.1	1.7	.1																	3	3	3
8/ 7	.7	1.3																		2	2	2
6/ 5	.4	.5																		1	1	1
4/ 3	.2																					1
2/ 1	.3	.1																				
0/ -1	.2	.2																				
-2/ -3																						
-4/ -5	.2																					
-6/ -7	.2																					
-8/ -9	.1																					
-10/-11	.1																					
-12/-13																						
-14/-15																						
TOTAL	11.0	55.9	23.4	6.1	.9	.1														1162		1158
																		1158			1158	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6142971	82565	71.3	14.661	1158							
Dry Bulb	1000332	26330	24.0	9.265	1162	.8	65.9					84
Wet Bulb	671200	25992	22.4	8.711	1158	.9	74.6					84
Dew Point	434197	18299	16.1	10.821	1158	6.5	79.1					84

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE JUL 64

DATA PROCESSED BY
USAF ETAC
TYP EAT [illegible]

PSYCHROMETRIC SUMMARY

32 [illegible] CAMP PAGE AB WISCONSIN/[illegible] STATION NAME 52-56, 61-76 YEARS MONTH

[illegible] 1 1200-1[illegible] HOURS

Temp F	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21	22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew P
56/ 55						.1															1		
54/ 53					.2	.1	.1														4		
52/ 51				.1	.1		.1														3		
50/ 49			.1		.2	.2													[illegible]		14		
48/ 47			.1	.4	.4	.4		.1											17		17	1	
46/ 45			.5	.3	.1	.1													[illegible]		35	5	
44/ 43		.4	.5	.5	.5	.3	.2												[illegible]		[illegible]	7	
42/ 41		.6	1.3	2.2	1.4	.3	.1												7		76	24	
40/ 39	.1	1.3	1.7	2.3	2.3	.4													[illegible]		96	47	11
38/ 37	.1	1.1	2.4	3.4	1.3	.2													121		121	56	17
36/ 35		2.4	3.3	3.4	1.3														116		116	69	24
34/ 33		1.9	3.2	3.1	1.3	.1													1[illegible]		11[illegible]	105	[illegible]
32/ 31	.1	1.9	3.4	3.7	.7	.1													111		111	154	57
30/ 29		1.3	3.[illegible]	3.3	.4														[illegible]		[illegible]	12[illegible]	[illegible]
28/ 27		.6	3.2	2.6	.3														7[illegible]		7	102	7[illegible]
26/ 25	.1	.7	3.2	4.2															7[illegible]		7[illegible]	92	[illegible]
24/ 23	.1	1.1	2.7	1.2															[illegible]		[illegible]	96	67
22/ 21		1.2	1.8	.5															[illegible]		[illegible]	[illegible]	70
20/ 19	.1	.9	1.7	.2															[illegible]		[illegible]	68	77
18/ 17	.1	.2	.5																13		13	44	[illegible]
16/ 15		.4	.4																[illegible]		[illegible]	22	7[illegible]
14/ 13		.1	.1																[illegible]		[illegible]	10	[illegible]
12/ 11		.2																	[illegible]		[illegible]	4	[illegible]
10/ 9		.2																	[illegible]		[illegible]	[illegible]	[illegible]
8/ 7		.1																	1		1	2	44
6/ 5																						1	[illegible]
4/ 3	.1																		1		1	1	[illegible]
2/ 1																							21
0/ -1																							[illegible]
-2/ -3																							14
-4/ -5																							1[illegible]
-6/ -7																							[illegible]
-8/ -9																							[illegible]
-10/ -11																							[illegible]

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
-17/-17																					
-20/-21																					
TOTAL																					

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1288452	0578[illegible]	50.2	16.252	1134							
Dry Bulb	1312098	37066	33.1	7.935	1135		17.6					24
Wet Bulb	981890	32436	28.6	6.929	1134		59.9					84
Dew Point	903877	26767	18.3	10.443	1134	4.1	76.6					24

USAFETAC FORM 0-26-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
SAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — CAPE PAGE AAF [illegible] — 52-56, 71-72 — [illegible]
STATION — STATION NAME — YEARS — MONTH

[illegible] — 1500-1700
HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
56/ 55				.1	.2	.4		.1										1	1		
54/ 53				.2		.2	.2	.1										1	1		
52/ 51			.1	.1	.3	.5	.2											1	1		
50/ 49				.9	1.4	.6	.2											3	3	2	
48/ 47			.2	.4	.7	.7	.2											4	4	7	
46/ 45		.5	.5	1.3	2.0	.8	.3											5	5	7	4
44/ 43		.1	.7	2.2	1.3	1.0	.4											7	7	25	4
42/ 41	.1	.9	.5	2.7	2.7	1.1	.3											10	10	42	2
40/ 39		.5	1.4	2.2	3.9	1.6												14	14	57	14
38/ 37	.1	.9	1.9	2.1	3.4	.5												13	13	67	16
36/ 35		1.6	2.6	3.3	1.6	.2												15	15	88	22
34/ 33	.1	1.6	1.6	3.2	2.0													11	11	121	31
32/ 31	.1	1.1	1.7	3.5	1.2													13	13	134	52
30/ 29	.1	.3	2.3	3.2	.5													11	11	99	49
28/ 27		.5	3.0	3.2	.3													11	11	95	56
26/ 25	.1	.4	1.6	1.5														4	4	69	62
24/ 23		.6	1.2	.7														2	2	88	78
22/ 21		.4	1.1	.2														2	2	81	49
20/ 19		.3	.1	.1														1	1	31	50
18/ 17		.2	.3															1	1	13	77
16/ 15		.2	.1															1	1	13	75
14/ 13		.1																1	1	6	71
12/ 11																				1	77
10/ 9																					57
8/ 7																					63
6/ 5																					44
4/ 3																					24
2/ 1																					25
0/ -1																					13
-2/ -3																					11
-4/ -5																					6
-6/ -7																					4
TOTAL	.5	10.2	22.0	33.7	21.9	9.4	2.0	.4										1093	1094	1093	1093

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3169792	56016	51.2	16.547	1093							
Dry Bulb	1506480	39710	36.3	7.717	1094		26.6					84
Wet Bulb	1081111	33569	30.7	6.774	1093		50.6					84
Dew Point	509448	20684	18.9	10.396	1093	2.6	75.2					84

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

ATA PR... SSTI... PROG...
SAT ETAC
...ER EATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

9321 — STATION
... P AGE AAF ...RTA/CHICOPEE — STATION NAME
02-54,01-67 — YEARS
... — MONTH
... — HOURS
... 20-20...

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew P.
54/ 51							.2											1	1		
52/ 51					.2													1	1		
50/ 49				.2	.4													2	2		
48/ 47				.4	1.1	.4												2	4		
46/ 45		.2	.2	1.2	1.2	.4												3	10		
44/ 43	.2	.2	1.2	2.1	1.1		.2											20	26	3	
42/ 41	.4	1.2	1.9	1.9	.8	.2												41	31	10	4
40/ 39	.2	.4	1.9	2.3	2.5	.6												31	41	29	9
38/ 37		1.7	3.3	2.3	1.7	.9												41	42	31	
36/ 35	.2	2.3	2.5	3.5	1.2													47	47	43	14
34/ 33		2.7	2.3	2.3	1.2													42	44	34	11
32/ 31	.4	2.7	2.3	2.7	.4		.2											43	43	36	36
30/ 29	.2	1.0	2.5	1.0	.2													34	32	30	10
28/ 27		.4	3.5	2.1	.2													41	36	34	31
26/ 25		.4	4.4	1.5														41	36	34	21
24/ 23		.4	4.6	2.2														30	36	33	22
22/ 21		.0	1.5	.4														12	12	35	17
20/ 19		1.2	1.2															15	15	31	27
18/ 17		.2	1.0																6	20	23
16/ 15		.2	1.2															6	6	6	12
14/ 13		.2	.2															2	2	7	7
12/ 11																				5	12
10/ 9																					7
8/ 7																					27
6/ 5																					6
4/ 3																					12
2/ 1																					11
0/ -1																					12
-2/ -3																					
-4/ -5																					
-6/ -9																					
-10/-11																					1
TOTAL	1.7	16.9	30.7	20.7	13.1	2.3	.0											480	480	480	479

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1098291	27341	57.0	17.153	480							
Dry Bulb	503080	16024	33.4	7.747	480		37.1					54
Wet Bulb	428960	13924	29.0	7.231	480		55.6					84
Dew Point	228228	9010	18.8	11.115	479	4.4	75.8					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

4927 CAM RANH BAY (DELTA/CENTER) 52-56
STATION NAME YEARS

MONTH

HOURS (LST) 2100-2300

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
44/ 43																					
42/ 41		1.2																	3		
40/ 39	1.2	2.4	1.2																14		9
38/ 37		1.2	2.4															17	14	10	
36/ 35		3.7	2.1															24	23	12	
34/ 33		4.9	3.9															41	29	20	14
32/ 31	1.2	4.7	3.9															29	35	26	11
30/ 29	1.6	3.9	4.3															21	21	29	25
28/ 27		1.2	3.1	1.2														13	14	18	13
26/ 25		2.4	3.1															14	12	13	15
24/ 23		3.1	3.1															22	22	19	13
22/ 21		3.1	3.5															17	17	22	14
20/ 19		3.1	2.7															15	15	31	17
18/ 17		3.1	4.3															12	12	18	9
16/ 15		2.0	1.2															3	5	16	9
14/ 13		2.0																5	3	3	2
12/ 11		1.																	3	8	10
10/ 9																		1	1	3	19
8/ 7																				11	6
6/ 5																					22
4/ 3																					11
2/ 1																					5
0/ -1																					3
-2/ -3																					3
-4/ -5																					4
-6/ -7																					2
TOT...		1.2	1.2															255	255	255	255

Element X	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1217751	17151	67.3	15.898	255							
Dry Bulb	217732	7182	28.2	7.600	255		56.0					84
Wet Bulb	181850	5516	25.6	7.775	255		66.9					84
Dew Point	116498	4630	18.2	11.262	255	4.0	75.6					84

USAFETAC FORM 0-26 5 (OL-A)

DATA PROCESSED BY ...
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 STATION NUMBER — CAMP PAGE AAF FIRE/CHURCHI STATION NAME — 2-59 YEARS — ... MONTH

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B	TOTAL W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew P
≥ 121 / 61				.4															1			
120 / 59			.7																			
118 / 57																				1		
116 / 55																				2		
114 / 53																						
112 / 51																						1
110 / 49				.1														1	1			
108 / 47		1.1	.7	.4														2	2			
106 / 45	.4	.4	.4	.7		.4												7	7	5		
104 / 43	.4	1.1	2.2															13	13	8	1	
102 / 41	1.1	5.4	1.1															21	21	13		
100 / 39	.7	1.8	3.2	.7	.4													17	16	22	14	
98 / 37	.7	5.0	3.9	.4														29	20	14	12	
96 / 35	1.4	5.7	3.9	.4														32	12	29	13	
94 / 33	.4	11.5	5.7	1.1														54	54	40	22	
92 / 31	.4	8.6	3.2															34	34	42	23	
90 / 29		4.3	4.7	1.4														9	9	34	36	
88 / 27		2.5	2.1	.4														15	16	43	31	
86 / 25		.4	1.4															5	5	21	24	
84 / 23		.7	.7															4	4	11	24	
82 / 21		.4	.7															3	3	5	10	
80 / 19			.7															2	2	5	9	
78 / 17																				2	10	
76 / 15																					8	
74 / 13																					7	
72 / 11																					4	
70 / 9																					1	
68 / 7																					3	
66 / 5																					2	
64 / 3																					1	
62 / 1																					1	
TOTAL	3.4	49.5	36.6	7.9	.4	.4												279	279		279	
																		279		279		

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1654974	21174	75.9	13.092	279							
Dry Bulb	354652	9794	35.1	6.240	279		31.3					93
Wet Bulb	307835	9099	32.6	6.316	279		48.3					93
Dew Point	237903	7787	27.9	8.601	279		66.7					93

USAFETAC FORM 0-26-5 (OL-A) REVISE PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — CAMP PAGE AAF KUNSAN/CHEONJU — 62-63,01,64-67,70-71 — [illegible] — 0300-1200
STATION — STATION NAME — YEARS — MONTH — HOURS (L.S.T.)

Temp. (F)	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
56/ 55			.4	.2														1		1		
54/ 53			.2															1		1	2	
52/ 51																					1	
50/ 49				.1														1		1		1
48/ 47			.4	.1		.1												1		1		
46/ 45		.6	.4	.9	.2													11		11	11	3
44/ 43		.6	.1	.4														2		4	3	2
42/ 41		.9	3.1	.2		.2												25		26	14	7
40/ 39		.9	2.6	.4	.2													21		21	27	17
38/ 37		1.3	2.2	2.0	.4	.2												35		36	26	29
36/ 35		1.2	4.6	1.7	.4		.4											48		48	30	21
34/ 33		.2	8.5	.6	.6													57		57	45	25
32/ 31		2.0	11.7	2.6	.4													71		71	77	45
30/ 29		1.5	6.7	3.5	.6													77		77	80	60
28/ 27		.4	7.4	1.7	.4													53		53	56	55
26/ 25		.6	5.7	1.1														40		40	64	52
24/ 23		.2	3.1	.6														24		24	41	41
22/ 21		.2	1.2	.2														14		14	21	43
20/ 19		.2	1.7	.4														12		12	11	30
18/ 17			1.1															6		6	14	24
16/ 15			.4															2		2	5	20
14/ 13																					2	12
12/ 11																						12
10/ 9																						9
8/ 7																						4
6/ 5																						0
4/ 3																						3
-4/ -5																						1
-6/ -7																						1
TOTAL	11.7	66.1	18.3	3.0	.6	.4												540		540		540
																		540			540	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3578856	43396	80.4	13.024	540							
Dry Bulb	577750	17298	32.0	6.622	540		54.9					93
Wet Bulb	517797	16341	30.3	6.575	540		63.9					93
Dew Point	415321	14219	26.3	8.712	540	.3	73.2					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

4327 (STATION) CAMP PAGE AAF, KOREA/CH CHU (STATION NAME) 53-54,61-72 (YEARS) (MONTH)

(HOURS)

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
54/ 53		.2	.2																		
52/ 51		.4	.1																		
50/ 49			.2	.1																	
48/ 47	.1	.2	.6	.2		.1															
46/ 45	.2	.3	.3	.1																	
44/ 43	.6	.7	.4		.1																
42/ 41	.1	1.2	.5	.3		.1															
40/ 39	.3	2.1	1.1			.2															
38/ 37	1.0	3.0	1.2	.3	.2																
36/ 35	1.5	5.4	1.9	.4	.2	.2															
34/ 33	1.2	7.0	1.7	.3	.2																
32/ 31	1.0	9.2	2.2	.2																	
30/ 29	2.3	6.1	1.6	.2																	
28/ 27	1.0	7.1	1.4	.2																	
26/ 25	1.0	7.7	.6	.2																	
24/ 23	.8	5.3	.7																		
22/ 21	.3	3.3	.1																		
20/ 19	.2	1.0	.2																		
18/ 17	.3	1.3	.1																		
16/ 15	.2	.9																			
14/ 13		.2																			
12/ 11																					
10/ 9																					
8/ 7																					
6/ 5																					
4/ 3																					
-2/ -3																					
TOTAL	13.9	66.2	19.2	2.9	.9	.5												1299	1304	1299	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	8721277	105177	81.0	12.578	1299							
Dry Bulb	1296750	40162	30.8	6.774	1304		58.6					93
Wet Bulb	1158710	37834	29.1	6.614	1299		67.7					93
Dew Point	927024	32938	25.4	8.439	1299	.1	75.2					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING PRACTICE
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

63271 STATION NUMBER — [illegible] AAF STATION NAME — 52-56, 61-72 YEARS — [illegible] MONTH — [illegible] HOURS

Temp. °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
58/ 57		.1		.1	.2	.1															
56/ 55		.2	.1		.2	.1	.1	.1													
54/ 53		.1	.1	.2	.2	.3	.1														
52/ 51			.1	.4	.1	.2	.1														
50/ 49		.3	.4	.4	.3	.3															
48/ 47	.2	.2	1.0	1.3	1.4	.3															
46/ 45	.3	.3	1.3	2.1	1.2	.2															
44/ 43	.1	1.1	2.1	2.5	1.0	.3															
42/ 41	.3	1.2	3.0	2.1	.7	.5															
40/ 39	.5	1.3	4.1	2.3	1.3	.2															
38/ 37	.2	3.5	3.2	2.1	1.0	.2															
36/ 35	.7	4.2	3.2	1.3	.6																
34/ 33	.5	3.3	4.1	1.7	.3																
32/ 31	.3	2.6	3.1	.9	.2																
30/ 29	.1	2.6	2.3	1.2	.2																
28/ 27	.3	2.2	1.6	.4																	
26/ 25	.3	1.2	1.1	.3																	
24/ 23		1.3	.5																		
22/ 21		.6	.1																		
20/ 19		.2	.2																		
18/ 17																					
16/ 15																					
14/ 13																					
12/ 11																					
10/ 9																					
8/ 7																					
6/ 5																					
4/ 3																					
2/ 1																					
TOTAL	3.8	28.2	34.2	20.3	10.1	3.0	.2	.1										1303		1303	
																	1303		1303		

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6288640	88090	67.6	15.999	1303							
Dry Bulb	1871633	48501	37.2	7.136	1303		23.4					93
Wet Bulb	1508704	43550	33.4	6.388	1303		42.0					93
Dew Point	1033458	34922	26.8	8.654	1303		67.7					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP PAGE AAF KUREI/CHUCHON — STATION NAME
52-54,61-72 — YEARS
MONTH

PERIOD 1 — 1200-1400 HOURS (LST)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
70 / 69											.1							1	1		
68 / 67								.2		.1	.1							4	4		
66 / 65						.1	.1	.1	.2									3	3		
64 / 63					.1	.2	.1	.2	.2									[illegible]	[illegible]		
62 / 61			.1		.1		.3	.0	.2									[illegible]	[illegible]		
60 / 59		.1		.2		.0	.0	.2	.1	.1								34	34	1	
58 / 57		.1		.1	.1	.4	.2	1.3	.3	.1								[illegible]	[illegible]	1	1
56 / 55		.6	.2	.2	.0	1.0	1.2	.7	.2									[illegible]	46	2	0
54 / 53			.1	.1	.7	2.2	1.7	.7	.1									77	77	10	
52 / 51		.2	.4	1.0	1.8	2.4	1.3	.3										1[illegible]	1[illegible]	3.	1
50 / 49		.2	.6	1.4	2.5	2.5	.6	.1										1[illegible]	1[illegible]	30	2
48 / 47	.6	.3	.6	1.7	2.0	2.4	.5											1[illegible]	1[illegible]	56	
46 / 45	.2	.5	.9	2.1	2.6	1.7	.4											1[illegible]	1[illegible]	100	15
44 / 43	.2	.9	.7	2.9	2.9	1.6	.3											1[illegible]	1[illegible]	125	17
42 / 41	.2	.4	1.6	1.9	2.2	1.3	.1											[illegible]	[illegible]	144	[illegible]
40 / 39	.2	.2	1.3	2.2	2.3	.5												1[illegible]	1[illegible]	131	21
38 / 37	.2	.4	1.2	2.1	1.6	.4												[illegible]	[illegible]	147	57
36 / 35	.2	.4	.2	2.1	1.7	.1												[illegible]	[illegible]	105	66
34 / 33	.4	.2	1.5	1.[illegible]	.[illegible]													[illegible]	65	115	123
32 / 31	.1	.2	.6	1.1	.3													2[illegible]	2[illegible]	114	133
30 / 29	.1		.3	.4														1[illegible]	1[illegible]	83	101
28 / 27		.1	.2	.2														6	6	36	101
26 / 25			.1	.1														2	2	24	92
24 / 23																				10	80
22 / 21																				1	84
20 / 19																				1	72
18 / 17																					54
16 / 15																					57
14 / 13																					44
12 / 11																					27
10 / 9																					30
8 / 7																					11
6 / 5																					3

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

2

DATA PROCESSING BRANCH
SAC ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

9327 [illegible] PAGE AFB [illegible] STATION NAME | [illegible] YEARS | MONTH

[illegible] 1200-1700 HOURS

Temp. °F	WET BULB TEMPERATURE DEPRESSION (F)																					TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb Dew P.
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31							
TOTAL	1.	5.	211.	128.	23.	917.	[illegible]	[illegible]	1.3	.2	.2											1272	1272	1272

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3078397	64915	51.0	16.912	1272							
Dry Bulb	2703626	57788	45.4	7.847	1272		3.4	.4				93
Wet Bulb	1904877	48571	38.2	6.285	1272		19.7					93
Dew Point	1041133	34535	27.2	9.024	1272		66.3					93

USAFETAC FORM 0-26-5 (OL A) JUL 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP PAGE AAF, KOREA/CHUNCHON — STATION NAME
YEARS
MONTH
HOURS

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
70/ 69								.1			.1										
68/ 67							.1	.3	.1	.4											
66/ 65				.1		.1	.3	.2	.2	.4								1	16		
64/ 63						.1	.1	.2	.2	.3								2	27		
62/ 61			.1		.2	.2	.2	1.2	.2	.2								14	14		
60/ 59				.1	.1	.2	1.1	.2	1.1	.2								33	32	3	
58/ 57				.1	.1	.1	.2	1.1	1.1	.2								2	2		1
56/ 55			.2	.3	.2	1.0	1.2	1.1	.3	.1								43	35	4	2
54/ 53			.2	.3	.1	2.6	1.7	.2	.2									8	11	13	
52/ 51		.1	.1	1.3	2.0	2.3	2.5	.3										105	105	14	
50/ 49		.2	.1	1.1	2.4	2.3	1.3	.4									1	131	132	51	5
48/ 47		.2	.3	.7	2.3	1.7	1.1	.1									1	132	132	78	16
46/ 45		.2	.1	1.1	2.1	2.2	.2										1	131	131	136	21
44/ 43	.1	.3	.3	1.1	2.0	2.4	.1											96	94	148	25
42/ 41	.2	.3	.2	.7	2.3	1.9												1	1	141	26
40/ 39		.1	.2	1.4	2.0	1.3												2	2	121	43
38/ 37		.1	.2	1.1	1.5	.3												1	1	116	55
36/ 35	.2	1.0	.1	1.1	1.5	.1												60	60	105	67
34/ 33	.3	1.1	.1	1.1	.6													41	41	103	94
32/ 31			.2	.1														2	8	81	97
30/ 29	.1	.2		.3															2	61	104
28/ 27																				34	100
26/ 25																				12	69
24/ 23																			1	2	93
22/ 21																					88
20/ 19																					69
18/ 17																					47
16/ 15																					60
14/ 13																					30
12/ 11																					34
10/ 9																					29
8/ 7																					20
6/ 5																					9
4/ 3																					4

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 CAMP PAGE AAF, ARIZ/CHINO — 52-54, 71-72 — 2 — 1900-1959
STATION NUMBER — STATION NAME — YEARS — MONTH — HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
2/	]																				
0/	-1																				
TOTAL		6.6	6.6	11.1	12.2	14.2	7.4	4.6	1.6	.1								122	1231	1228	1228

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3082654	57234	46.6	18.394	1228							
Dry Bulb	2934335	59209	48.1	8.385	1231		1.3	.8				93
Wet Bulb	1976820	48648	39.6	6.358	1228		14.4					93
Dew Point	1003232	33038	26.9	9.655	1228	.2	65.8					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
70/ 69								•1										1			
66/ 65					•2		•2	•2										1			
64/ 63						•1		•1		•1		•1						1	1		
62/ 61							•2		•2	•1	•2							2	2		
60/ 59							•2	•3	•2	•2								4	1	1	
58/ 57					•2	•2	•2	•2	•2	•2								12	12		1
56/ 55					•2	•2	1•7	•2	1•3	•2								7	7	5	
54/ 53				•2	•4	•2	1•7	1•3	•4									21	21		
52/ 51				•2	1•3	•9	2•3	•4	•4									29	33	4	
50/ 49			•6	1•5	2•3	2•5	1•5	1•2	•2									42	42	13	
48/ 47			•8	2•1	2•5	2•3	1•3	•9										51	49	31	2
46/ 45			•7	1•3	2•2	3•4	1•3	•4										56	54	33	12
44/ 43		1•1	1•7	3•2	1•7	1•3												69	69	63	19
42/ 41	•6	•2	1•9	1•1	1•1	•2	•2											38	38	67	29
40/ 39	•4	1•9	2•1	1•7	2•1	•9												49	49	69	38
38/ 37	•2	2•1	1•5	1•2	1•7													37	37	72	39
36/ 35	•4	1•3	1•1	•5	•6	•4												33	33	45	45
34/ 33		1•7	•8	1•2	•4													22	22	40	44
32/ 31			•9	•4	•2													6	6	37	40
30/ 29		•2		•2	•2													5	5	26	53
28/ 27				•1														3	3	12	37
26/ 25			•6															1	1	5	36
24/ 23																				5	27
22/ 21																				3	19
20/ 19																					25
18/ 17																					17
16/ 15																					25
14/ 13																					10
12/ 11																					9
10/ 9																					5
8/ 7																					2
6/ 5																					5
4/ 3																					0

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[illegible] STATION NAME [illegible] YEARS MONTH

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																						TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31							
TOTAL	1	11	15	24	31	41	5	4	1	5														

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1524842	29290	55.6	19.490	527							
Dry Bulb	1122567	23977	45.5	7.761	527		2.6	.2				
Wet Bulb	819589	20523	38.9	6.222	527		15.5					
Dew Point	494122	15324	29.1	9.006	527		56.3					

USAFETAC FORM 0-26-5 (OL A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

Temp °F		WET BULB TEMPERATURE DEPRESSION (°F) 0 1 2 3 4 5 6 7-8 9-10 11-12 13-14 15-16 17-18 19-20 21-22 23-24 25-26 27-28 29-30 ≥31	TOTAL D.B.	TOTAL W.B.	Dry Bulb	Wet Bulb	Dew Point
64/	63				1		
62/	61	.1 .1			2		
60/	59					1	
58/	57						1
56/	55					1	
54/	53	.1 .1			2	2	1
52/	51	1.1 1.1 .9			7	7	
50/	49	1.4 1.1			7	7	1
48/	47	.7 .7 .9 .5 .4			14	14	6
46/	45	1.4 4.3 2.1 .9			24	24	11 1
44/	43	3.2 1.8 2.3 .7			28	28	17 1
42/	41	.7 2.9 2.9 2.3			28	28	21 1
40/	39	1.4 4.3 5.7 1.4			37	37	29 1
38/	37	.4 5.7 3.9 .7 .9			41	41	39 2
36/	35	1.1 5.4 4.3 .1			39	39	44 2
34/	33	.7 3.9 3.9 1.1 .9			28	28	45 3
32/	31	.9 2.1 3.3 .9 .4			19	19	26 3
30/	29	2.9 1.1 .4			15	15	22 2
28/	27	.9 .7			2	2	13 2
26/	25	1.4 .7			6	6	7 1
24/	23	.4 .4			2	2	3
22/	21						5 1
20/	19						3 1
18/	17						1
16/	15						
14/	13						1
12/	11						1
10/	9						2
8/	7						3
6/	5						1
2/	1						1
0/	-1						1
-2/	-3						1
-4/	-5						1

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL-A) USAFETAC

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

MONTH

HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																					TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31								

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1478624	19910	71.1	14.910	280		14.6					
Dry Bulb	435750	10892	38.9	6.572	280		14.6					93
Wet Bulb	364374	9942	35.5	6.382	280		28.2					93
Dew Point	272958	8358	29.9	9.172	280	1.0	52.8					93

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — CAPE PAGE AAF, MISSOURI — 1955-1964 — ANNUAL — 0100-0700 HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
94/ 93																					
92/ 91																					
90/ 89																					
88/ 87				1.2																	
86/ 85	1.1	1.1																			
84/ 83		1.5	1.5	1.1	1.1																
82/ 81		3.4	4.5		1.5																
80/ 79			4.5		1.1																
78/ 77		1.5	4.5																		
76/ 75		2.3	4.1	3.4																	
74/ 73		4.7	7.5																		
72/ 71		2.3	6.8	1.5	1.1																
70/ 69		6.1	2.3																		
68/ 67		2.3	1.1																		
66/ 65		1.7	1.5																		
64/ 63																					
62/ 61																					
60/ 59																					
58/ 57																					
56/ 55																					
54/ 53																					
52/ 51																					
TOTAL	3.3	27.1	39.4	12.3	7.1	1.5	1.1											266	269	266	266

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1505781	19093	74.9	13.436	266							2
Dry Bulb	794217	12539	46.6	8.026	269							2
Wet Bulb	497321	11395	42.8	5.887	266		1.0					9
Dew Point	405082	10180	38.3	7.530	266		19.3					9

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISE PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING GRAPH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

9321 CAMP PAGE AAF [illegible]/CHINA — 53-54, 61, 64-67, 70-71 — [illegible]
STATION NAME — YEARS — MONTH

[illegible] — 2300-0259 HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
64/ 63			.4		.2	.4															
62/ 61		1.1	.4	.4																3	
60/ 59				.4	.4																
58/ 57		1.1	.5	.2	.4	.4														3	
56/ 55	.2	1.1	1.5	.4		.4	.2		.4												
54/ 53	.4	1.1	1.1	.6	.2		.2													17	
52/ 51	.4	2.5	.8	1.3																	
50/ 49		3.6	2.7	1.7	.9	.2														25	20
48/ 47	.2	3.8	3.0	1.0	.4																
46/ 45	.2	5.5	3.0	1.0	.4																
44/ 43	.8	3.6	3.0	1.7	.4																
42/ 41	1.0	5.7	1.9	1.1	.2																
40/ 39	.8	5.9	2.5	1.0																	
38/ 37	.2	5.1	2.1	.2																	
36/ 35	.2	5.3	1.5	.2																	
34/ 33	.2	5.1	.8																		
32/ 31	.2	2.1	.4																		
30/ 29		.3	.4																		
28/ 27		.2		.2																	
26/ 25																					
24/ 23																					
22/ 21																					
20/ 19																					
18/ 17																					
16/ 15																					
14/ 13																					
TOTAL	4.6	53.5	20.5	10.4	2.9	1.1	.4		.2									525	[illegible]	525	525

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3494638	42312	80.6	12.701	525							
Dry Bulb	1046145	23183	43.9	7.321	528		3.8					90
Wet Bulb	918542	21696	41.2	6.941	525		8.9					90
Dew Point	791514	19940	38.0	8.076	525		23.1					90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

ATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[redacted] STATION NAME [redacted] YEARS [redacted] MONTH

[redacted] HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
72/ 71				• 1															1		
70/ 69			• 1																2		
68/ 67		• 2																	3	1	
66/ 65		• 1	• 1																3	5	•
64/ 63		• 3	• 1																4	3	4
62/ 61	• 5	• 4	• 1																10	11	5
60/ 59	• 1	• 3	• 1	• 3	• 1														9	10	7
58/ 57	• 1	1 • 1	• 6	• 1	• 4	• 1	• 2		• 1	• 1									17	14	15
56/ 55	• 4	1 • 5	• 7	• 3	• 4	• 1			• 1										21	23	19
54/ 53	• 3	1 • 6	1 • 3	• 6	• 4	• 2	• 2	• 2											29	37	28
52/ 51	• 6	2 • 1	2 • 2	1 • 4	• 2	• 3	• 1												37	49	38
50/ 49	• 7	2 • 6	3 • 2	• 6	• 4	• 1	• 1	• 1											115	116	77	60
48/ 47	• 5	3 • 9	3 • 5	1 • 1	• 6		• 1												146	146	94	91
46/ 45	• 8	4 • 2	3 • 6	• 6	• 2														146	127	143	74
44/ 43	• 4	4 • 0	2 • 8	1 • 1															127	127	133	151
42/ 41	1 • 2	4 • 7	2 • 5	• 2	• 1														127	127	126	147
40/ 39	• 9	4 • 6	2 • 7	• 4		• 1													113	118	142	134
38/ 37	• 2	4 • 4	2 • 1	• 5	• 2														106	107	121	132
36/ 35	• 4	5 • 0	1 • 6	• 4															106	104	108	116
34/ 33	• 3	3 • 2	1 • 4																74	76	115	126
32/ 31	• 2	2 • 0	• 4																43	44	79	123
30/ 29	• 1	1 • 1	• 1																19	20	47	74
28/ 27	• 1	• 0	• 4																19	17	19	56
26/ 25		• 1																	1	1	5	50
24/ 23																					5	28
22/ 21																						7
20/ 19																						10
18/ 17																						2
16/ 15																						1
14/ 13																						4
12/ 11																						4
10/ 9																						2
[redacted]																						1
[redacted]																						1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26 5 (OL A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

4327 (1) CAMP HAGO AAF [illegible] CHINA STATION NAME 52-53 YEARS MONTH

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Pt
TOTAL	7,965	2,285	1,201	911	471	241	141	81	51	31	21	11	11	11	11	11	11	14,177	14,177

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9439829	113975	80.41	13.843	1417							
Dry Bulb	2875171	63225	44.61	7.733	1433		5.2	.4				5
Wet Bulb	2521982	58850	41.5	7.415	1417		9.8	.1				9
Dew Point	2219205	53737	37.91	11.285	1417		23.1					23

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSED BY [illegible]
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

[illegible] CAMP PAUL [illegible] STATION NAME 52-56, 61-72 YEARS [illegible] MONTH

[illegible] HOURS [illegible]

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
78/ 77							.1												1		
74/ 73					.1				.1												
72/ 71						.1		.1	.1	.1									3		
70/ 69		.1		.1		.1	.2	.1	.1	.1								14	14		
68/ 67			.2	.1	.1	.2	.2		.2									9	9	2	1
66/ 65		.1	.1	.1	.1	.4	.4	.4	.1	.1								23	23	3	
64/ 63	.1	.1	.1	.1	.3	.4	.3	.4	.2	.1								17	17	17	4
62/ 61		.2	.1	.2	.2	.2	.2	.2	.2									14	14	6	4
60/ 59	.2	.3	.3	.2	1.2	1.7	1.3	.3	.1	.1								33	33	33	21
58/ 57	.1	1.2	1.1	1.2	1.0	1.2	1.1	.4										123	123	32	14
56/ 55	.3	1.3	.2	1.0	2.0	1.5	.3	.4										171	171	73	32
54/ 53	.4	1.3	1.0	2.2	2.3	1.3	.7	.2	.1									188	188	52	25
52/ 51	.1	1.4	1.7	3.3	2.0	1.1	.5	.1										192	193	97	54
50/ 49		1.2	2.1	2.3	2.5	1.3	.2											125	125	136	42
48/ 47	.1	1.3	2.1	2.7	2.4	.6	.2											171	170	167	56
46/ 45		1.1	2.4	1.6	1.2	.3	.1											91	92	167	92
44/ 43		.7	1.3	1.3	.4	.4	.1											73	72	159	97
42/ 41	.1	.2	1.7	.9	.2	.1												35	36	149	122
40/ 39	.1	.	1.1	.2														30	30	105	137
38/ 37	.1	.2	.7	.3														23	24	71	130
36/ 35	.1	.1	.3	.1														5	5	51	121
34/ 33			.1	.1														3	3	21	104
32/ 31				.1														1	1	10	80
30/ 29			.1	.1														2	2	2	64
28/ 27		.1																1	1	2	52
26/ 25																				3	36
24/ 23																					27
22/ 21																					10
20/ 19																					12
18/ 17																					2
16/ 15																					1
14/ 13																					0
12/ 11																					1
10/ 9																					0

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[redacted] CAPE RACE AAF [illegible]/NEWFOUNDLAND STATION NAME 52-56,61-72 YEARS MONTH

[illegible] 2100-1100 HOURS [illegible]

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
37 7																			1
TOTAL	1,714,113,92	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	14[illegible]7	139[illegible]

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6013261	88115	63,0	18,135	1398							
Dry Bulb	3943064	73758	52,4	7,377	1407		,3	2,4	,2			90
Wet Bulb	3044399	64595	46,2	6,541	1398		1,1	,1				90
Dew Point	2257522	54678	39,1	9,229	1398		20,2	,1				90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

53271 — STATION

CAPE PRUE AAF [illegible] — STATION NAME

52-56, 61-72 — YEARS

[illegible] — MONTH

[illegible] 1200-1400 — HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
86/ 85										.1											
84/ 83													.1	.1							
82/ 81									.4		.3										
80/ 79							.1			.1	.2	.4									
78/ 77							.1	.3	.1	.1	.3	.2									
76/ 75						.1	.1	.3	.3	.3	.3	.7									
74/ 73					.1	.2	.3	.3	.5	.4	.7	.1	.1								
72/ 71						.3	.3	.3	.4	.4	.4										
70/ 69			.4		.2	.7	.9	1.	1.3	.7	.3										
68/ 67			.1	.1	.1	.3	.2	1.	1.9	1.1	.1	.1									
66/ 65		.3		.3	.2	.7	.7	1.3	1.4	1.1	.1										
64/ 63		.1	.1	.4	.1	1.4	1.0	1.4	.9	1.2											
62/ 61	.1	.1	.5	.8	.9	1.2	1.6	1.0	1.6	.4											
60/ 59		.7	.9	.4	1.7	1.1	1.3	1.0	.7	.1											
58/ 57	.1	.8	.7	.3	1.2	2.	1.7	1.4	.4												
56/ 55	.4	1.2	.4	1.0	1.5	1.5	2.5	.9	.4												
54/ 53	.4	1.1	.5	.9	1.5	1.0	.9	.4	.1												
52/ 51	.2	.7	.6	1.1	.9	.3	.7	.7													
50/ 49		.7	.7	.4	.6	.4	.4	.1													
48/ 47		.2	1.0	.2	.4	.2	.3														
46/ 45		.0	.3	.1	.1	.3	.1														
44/ 43		.1	.3	.4	.1	.1															
42/ 41	.1	.4	.2	.2	.1	.1															
40/ 39	.1	.1	.1		.1																
38/ 37	.1				.1																
36/ 35	.2																				
34/ 33			.1																		
32/ 31			.1	.1																	
30/ 29																					
28/ 27																					
26/ 25																					
24/ 23																					
22/ 21																					
20/ 19																					

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL A) JUL 64 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

9273 — FAIRBANKS AGR EXPERIMENTAL FARM — 52-56, 61-72 — 12 — 1200-1400

STATION NUMBER — STATION NAME — YEARS — MONTH — HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
16/ 17																					1
14/ 15																					1
12/ 13																					7
10/ 11																					5
8/ 9																					1
6/ 7																					1
4/ 5																					
TOTAL	1,5	8,2	9,9	7,2	illegible														1305		1383

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3965651	67925	49,1	21,344	1383							
Dry Bulb	5214033	84575	60,5	8,506	1399		,2	22,5	7,4	,7		90
Wet Bulb	3518263	69199	50,0	6,358	1383		,4	,3				90
Dew Point	2249100	53864	38,9	illegible 0,461	1383		23,9					90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — CAPE RACE AIR [illegible]/CANADA — 56-58, 61-76 — ALL

STATION — STATION NAME — YEARS — MONTH

HOURS (L.S.T.) 1100-1700

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
86/ 85										.1								2	2		
84/ 83												.1	.2					3	4		
82/ 81									.2	.1	.1	.2	.4					10	14		
80/ 79							.1	.3	.4	.1	.1	.1	.4	.1				33	34		
78/ 77								.2	.4	.6	.4	1.3	.7	.1				71	69		
76/ 75						.1	.1	.3	.4	1.1	1.2	.7	.1					5	5		
74/ 73				.1	.1	.1	.4	.7	.9	1.3	.7	.3	.1					64	66		
72/ 71						.1	.3	.4	1.4	1.4	.5	.3	.1					67	71		
70/ 69			.1	.1	.1	.1	.2	.4	1.4	2.2	1.1	.3						107	102		
68/ 67		.1	.2		.3	1.2	.7	1.0	1.4	1.5	1.1	.1						104	100	10	3
66/ 65	.1	.4	.2	.3	.5	.7	.6	.7	1.0	1.3	.3							93	93	18	3
64/ 63			.1	.4	.6	.7	1.3	1.9	1.3	1.1								100	100	22	7
62/ 61		.1	.2	.3	.7	1.1	1.7	1.9	1.9	.5								11	12	40	4
60/ 59	.1	.3	.4	.2	.7	.8	1.9	2.3	1.2	.2								116	117	60	14
58/ 57		.5	.3	.4	1.0	.6	1.7	1.1	.7									96	97	122	24
56/ 55	.4	.3	.4	.7	.5	1.0	1.1	.3	.4									91	92	142	40
54/ 53	.1	.4	.3	1.1	.9	.7	.9	.1	.2									84	84	127	49
52/ 51	.3	.3	.2	1.3	1.3	.2	.9	.1										67	67	151	57
50/ 49	.1	.7	.7	.3	.4	.2	.4	.1										44	44	159	62
48/ 47	.1	1.1	.2	.3	.3	.3	.1											21	21	179	43
46/ 45	.1	.1	.1	.2	.3	.1												13	13	157	77
44/ 43		.1	.1	.1		.1												7	7	61	50
42/ 41		.4	.1	.1	.2													11	11	36	64
40/ 39			.1	.1														3	3	33	96
38/ 37		.1																2	2	16	91
36/ 35	.2			.1														4	4	12	100
34/ 33	.2		.1	.1														5	5	7	101
32/ 31																					82
30/ 29																				2	71
28/ 27																				1	60
26/ 25																					37
24/ 23																					21
22/ 21																					13
20/ 19																					7

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

4327 (STATION) [illegible] (STATION NAME) [illegible]-7[illegible] (YEARS) [illegible] (MONTH)

1500-17[illegible] (HOURS [illegible])

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	TOTAL W.B.	Dry Bulb	Wet Bulb	Dew Point
18/ 17																						1
16/ 15																						1
14/ 13																						3
12/ 11																						4
10/ 9																						1
8/ 7																						1
6/ 5																						2
Totals	1[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	1365	1350	1350	1350	1350

Element (X)	Σ_X^2	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3359894	60432	44.8	22.030	1350							
Dry Bulb	5537353	85973	63.0	9.279	1365			33.4	15.2	2.2		90
Wet Bulb	3555624	68758	50.9	6.306	1350		.2	.7				90
Dew Point	2129938	51670	38.3	10.626	1350		26.7					90

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — CAPE PRICE AMB — 52-56, 61-67 — — 1100-2200
STATION NAME — YEARS — MONTH — HOURS

Temp. °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B.	TOTAL W.B.	Dry Bulb	Wet Bulb	Dew Point
92/ 81										.2								1	1			
90/ 79									.6		.6	.6	.4									
88/ 77							.4	.2	.2	.6		.7										
86/ 75							.4		.9	.4	.4	.4						13	14			
84/ 73							.2		.4	.7	.4	.4	.4					14	14			
82/ 71						.1		.7	.9	.5	.4	.2						13	13			
80/ 69				.2	.4	.2	.7	1.0	1.2	1.1	.2							10	10			
78/ 67					.2	.1	1.2	.5	1.3	.5	.1							9	10			
76/ 65		.2	.1	.2	.1	.2	.1	2.3	1.4	.5	.2							7	7	2		
74/ 63		.1		.1	.3	.1	1.2	1.2	1.1	.3	.2							9	9	12	1	
72/ 61			.3	.5	.5	1.4	2.1	1.4	1.6	.5								15	15	13	4	
70/ 59		.1	.1	.1	.3	2.3	1.2	2.2	1.1									25	26	16	9	
68/ 57		1.0	.5	.5	1.1	1.1	2.1	1.2	.3									35	35	42	7	
66/ 55	.0	1.1	.2	1.0	.3	1.0	1.0	.2										40	40	51	22	
64/ 53		.3	.4	1.1	1.2	1.3	1.2	.3										47	47	44	23	
62/ 51	.3	.3	.3	2.2	.3	.1	.1	.2										32	32	64	26	
60/ 49	.2	.1	1.0	.3	.3	.3	1.1	.2										33	33	59	25	
58/ 47		1.4	.1	.4	.2	.2												19	19	61	22	
56/ 45			.1	.1	.2	.1	.1											12	12	71	31	
54/ 43			.1			.1												2	2	47	44	
52/ 41		.2																1	1	26	33	
50/ 39		.2	.2	.2														3	3	20	45	
48/ 37																				11	37	
46/ 35	.3																	3	3	9	54	
44/ 33	.1																	1	1	3	31	
42/ 31			.2															1	1		31	
40/ 29																					29	
38/ 27																				1	24	
36/ 25																					11	
34/ 23																					17	
32/ 21																					24	
30/ 19																					9	
28/ 17																					4	
26/ 15																					2	

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL A) JUL 64 — USAFETAC

2

PSYCHROMETRIC SUMMARY

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
14/ 13																			
12/ 11																			
4/ 3																			

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1618157	27715	49.2	21.252	563							
Dry Bulb	2078740	34048	59.8	6.534	569		.2	20.6	7.0	.3		90
Wet Bulb	1406013	27911	49.6	6.383	563		.2					90
Dew Point	897201	21669	38.2	10.604	563		25.4					90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

93271 STATION NUMBER — [illegible] STATION NAME — 24-84 YEARS — [illegible] MONTH

[illegible] HOURS — 2100-2300

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0 1 2 3 4 5 6 7-8 9-10 11-12 13-14 15-16 17-18 19-20 21-22 23-24 25-26 27-28 29-30 ≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
68/ 67			
66/ 65			
64/ 63			1
62/ 61		12 12	3 4
60/ 59			2 2
58/ 57	2 1 2 2 2 1	31 32	5 1
56/ 55	1 1 1 1	26	13 6
54/ 53	1 3 3 2 2 3 3 2 1	15	16 11
52/ 51	2 3 1 2	7	17 7
50/ 49	2 1 2 2 2 1	26	27 12
48/ 47	1 3 3 3 3 1	16	31 19
46/ 45	1 1 3 4 3 1 1	7	24 31 1
44/ 43	1 1 1	13 11	34 16
42/ 41	1 1 1 1	4	36 21
40/ 39	1	1	29 15
38/ 37	1 1	3	9 22
36/ 35			3 24
34/ 33			1 19
32/ 31			14
30/ 29			12
28/ 27			10
26/ 25			4
24/ 23			4
22/ 21			2
20/ 19			5
18/ 17			1
16/ 15			1
TOTAL	1 1 1 5 1 0 1 9 1 0 2 6 1 1 7 1 3 1 7 3 3 2 4 1	266	266 266

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1133015	18711	62.8	17.710	266							
Dry Bulb	744235	14055	52.2	8.070	269			.7				90
Wet Bulb	574459	12259	46.1	5.984	266							90
Dew Point	426047	10454	38.9	9.330	266		21.3					90

USAFETAC FORM 0-26-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
70/ 69			.7	.4																	
68/ 67			1.1	.4	.4	.4															
66/ 65		1.1	2.2	1.1		.7															
64/ 63		1.8	2.4	1.7	.7		.4														
62/ 61	.7	3.2	3.0	1.5	.7	.7															
60/ 59		2.2	3.7	1.5	1.1	.4															
58/ 57		1.9	3.7	1.8	1.1	.4															
56/ 55		3.7	3.4	1.4		.7															
54/ 53		3.0	3.0	1.4	1.4	.4															
52/ 51		2.6	1.8	1.1																	
50/ 49		.7	1.1	1.1																	
48/ 47		.4	1.4	.4																	
46/ 45		.7		.4																	
44/ 43		.7																			
42/ 41		.4																			
40/ 39																					
38/ 37																					
36/ 35																					
34/ 33																					
TOTAL	.7	26.2	32.1	14.7	2.9	3.2	.4														

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1766600	22004	78.9	10.608	279							
Dry Bulb	749876	16214	58.1	5.230	279			3.0				93
Wet Bulb	629933	15149	54.3	5.152	279							93
Dew Point	746257	14325	51.3	6.219	279							93

USAFETAC FORM 0-26-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

STATION NUMBER

STATION NAME

YEARS

MONTH

HOURS

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
72/ 71					.2													1		
70/ 69				.2	.2													1		
68/ 67		.9	.2	.9	.2													3		
66/ 65		1.0	.8			.2												11	1	1	1
64/ 63	.2	1.7	1.7	.9	.2	.2	.2											17	17	17	7
62/ 61	.4	3.3	4.9	.5	.9	.2												32	42	17	12
60/ 59	.4	4.8	3.3	1.5	.9	.2	.2											34	44	45	21
58/ 57		5.6	2.3	1.5	.2	.2												47	47	43	33
56/ 55		5.6	4.0	.9														44	54	57	41
54/ 53	.2	6.2	3.2	.4		.2												29	54	60	52
52/ 51	.6	8.1	3.3	.6														49	43	66	72
50/ 49	1.5	7.3	1.2															34	54	64	72
48/ 47	.6	2.1	2.3	.2														27	28	45	61
46/ 45	.2	2.7	1.2	.4														23	23	27	42
44/ 43	.2	1.0																9	9	25	21
42/ 41	.4	2.1																13	13	13	24
40/ 39	.2	.6																4	4	11	21
38/ 37																				3	13
36/ 35		.2																1	1	1	2
34/ 33																					1
32/ 31																					1
TOTAL	3.4	53.4	30.7	7.1	1.7	1.2	.4											521		521	521

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3911809	44307	85.0	9.182	521							
Dry Bulb	1572758	28450	54.6	6.077	521			1.8				9
Wet Bulb	1430603	27141	52.1	5.670	521							9
Dew Point	1321326	26024	50.0	6.039	521		.2					9

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

[illegible] STATION NAME [illegible] YEARS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B.	W.B. Dry Bulb	TOTAL Wet Bulb	Dew P
72 / 71			.1																		
70 / 69			.1	.3	.1			.1													
68 / 67		.1	.5	.4	.1	.1															
66 / 65	.1	1.4	1.[illegible]	.5	.3	.4	.1														
64 / 63	.4	1.4	1.[illegible]	1.2	.7	.1	.1	.1													
62 / 61	.1	2.4	2.1	2.7	.5	.4	.1														
60 / 59	.1	3.7	3.6	[illegible]	.4	.2	.1	[illegible]													
58 / 57	.7	4.2	4.5	[illegible]	.2	.3															
56 / 55	.7	5.4	5.7	[illegible]	.4	.1	.1														
54 / 53	.9	4.3	5.6	1.3	.2																
52 / 51	.7	6.1	3.1	1.2	.2	.1															
50 / 49	.5	5.5	6.3	.5	.1																
48 / 47	.2	5.1	6.5	.3	.4	.1															
46 / 45	.3	2.3	.5	.2																	
44 / 43	.3	1.4	.2																		
42 / 41	.1	.2	.1																		
40 / 39	.1	.5																			
38 / 37	.1	.1																			
36 / 35		.1																			
34 / 33																					
32 / 31																					
30 / 29																					
28 / 27																					
24 / 23																					
TOTAL	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]									1467	1472	1467	1467	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	10138725	120833	82.4	11.265	1467							
Dry Bulb	4519489	81093	55.1	5.948	1472			1.5				9
Wet Bulb	4024090	76400	52.1	5.556	1467			.1				9
Dew Point	3657972	72678	49.5	6.255	1467		.7					9

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93271 CAMP PAGE AFB (KINGMAN) [illegible] 52-56, 61-75
STATION NAME YEARS MONTH

[illegible] 0600-1200
HOURS

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
80/ 79							.1	.1	.1		.1								[illegible]		
78/ 77					.1	.1	.2	.1	.3	.1								[illegible]	[illegible]		
76/ 75					.3	.7	.5	.2	.7	.4	.1	.1						[illegible]	[illegible]		
74/ 73				.2	.3	.6	.5	.7	.6	.2	.1							[illegible]	[illegible]		
72/ 71			.1	.6	1.1	1.3	1.5	1.4	.6	.3								[illegible]	[illegible]		
70/ 69		.1	.5	1.4	1.9	2.7	2.9	1.4	1.1	.2								[illegible]	[illegible]	2	
68/ 67	.1	.3	.4	1.3	2.7	4.1	1.7	.9	.5	.2								[illegible]	[illegible]	21	
66/ 65	.2	.2	.2	2.3	2.9	1.5	1.4	1.1	.3	.1								[illegible]	[illegible]	53	1
64/ 63	.2	1.1	2.1	3.2	2.9	1.1	.1	.9	.1									[illegible]	[illegible]	73	
62/ 61	.1	.9	2.3	3.1	2.7	1.0	.5	.1										[illegible]	[illegible]	130	
60/ 59	.1	1.2	1.0	2.2	2.1	.7	.3	.1	.1									[illegible]	[illegible]	229	
58/ 57		1.2	1.4	1.1	1.2	.5	.2	.1										[illegible]	[illegible]	257	1
56/ 55		1.2	1.1	.9	.5													[illegible]	[illegible]	235	1
54/ 53	.1	.1	1.1	.7	.1													[illegible]	[illegible]	100	1
52/ 51		.7	.2	.1	.1	.1												[illegible]	[illegible]	111	1
50/ 49	.1	.7	.2	.2														[illegible]	[illegible]	96	1
48/ 47		.2																[illegible]	[illegible]	46	
46/ 45	.1	.1																[illegible]	[illegible]	20	
44/ 43		.1																[illegible]	[illegible]	7	
42/ 41																				1	
40/ 39																					
38/ 37																					
36/ 35																					
34/ 33																					
32/ 31																					
30/ 29																					
28/ 27																					
26/ 25																					
24/ 23																					
TOTAL	.9	1.2	1.9	1.7	1.8	1.0	1.1	.5	.7	.2	.1							[illegible]	1464		145
																		1460		1460	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6554891	91025	62.2	10.135	1460							
Dry Bulb	6129911	94317	64.4	6.054	1464			36.6	7.5	.1		93
Wet Bulb	4705200	82002	56.6	4.746	1460			1.5				93
Dew Point	3702840	73386	50.3	6.886	1458		.8	.1				93

USAFETAC FORM 0-26-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

MONTH

HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
90 / 89											•1			•1	•1						
88 / 87										•1	•1	•2		•3							
86 / 85						•1		•1	•1	•4	•5	•2	•1	•6							
84 / 83					•1	•1	•1	•1	•3	•1	•1	•3	•4	•1	•1						
82 / 81				•1		•2	•1	•5	•7	•5	•1	•3	•3	•1							
80 / 79				•1	•1	•2	•2	•2	•5	•2	•1	•3	•4	•1				11	11		
78 / 77					•3	•5	•3	•7	•4	•4	•3	•3	•3					15	15		
76 / 75				•2	•3	•1	•2	•7	•3	•3	•4	•3	•1					17	17		
74 / 73			•1	•3	•7	•3	•3	•4	•9	•9	•7	•3	•1					14	14	3	
72 / 71			•1	•3	•1	•1	•2	•5	•2	•5	•1	•3						14	14	5	
70 / 69	•1	•2	•2	•1	•3	•3	•9	•9	•2	•2	•1							141	141	32	3
68 / 67	•1	•3	•0	•1	•3	•2	•4	•2	•2	•4								100	100	56	11
66 / 65	•1	•3	•2	•3	•7	•0	•3	•5	•3	•1								73	73	121	22
64 / 63		•6	•2	•3	•0	•3	•2	•1	•1	•1								44	44	170	35
62 / 61	•1	•3	•3	•2	•3	•4	•1		•1									27	27	239	55
60 / 59	•3	•6	•3	•4	•3	•3		•1										33	33	242	72
58 / 57	•1	•3	•7	•1		•1												13	13	199	91
56 / 55	•1	•7	•3	•4														23	23	142	101
54 / 53			•1	•1														3	3	97	132
52 / 51	•1		•1															3	3	67	149
50 / 49		•4	•1	•1														6	10	39	167
48 / 47																				7	123
46 / 45																				7	113
44 / 43																					67
42 / 41																					69
40 / 39																					41
38 / 37																					40
36 / 35																					27
34 / 33																					10
32 / 31																					23
30 / 29																					9
28 / 27																					12
26 / 25																					5
24 / 23																					5

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL A) 101 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93271 CAMP PAGE AAF KOREA/CHUNCHON 22-56,71-72 12
STATION NAME YEARS MONTH

HOURS 1200-1400

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																					TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31								
207 17 TOTAL	1.0	3.3	4.4	9.0	9.3	9.3	13.1	14.0	14.1	13.0	9.3	9.1	1.5	.4	.1								1442		143
																						14		143	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3479905	97813	47.2	16.311	1438							
Dry Bulb	7725057	105057	72.9	7.025	1442			77.6	52.4	13.3		93
Wet Bulb	5160402	85862	59.7	4.838	1438			7.2	.5			93
Dew Point	3050700	71460	49.7	8.271	1438		3.8	1.2	.1			93

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

[illegible] PAGE AFB [illegible] 52-56,61-74
STATION NAME YEARS MONTH

[illegible] 1200-1700
HOURS (LST)

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
92/ 91													.1		.1	.1					
90/ 89											.2	.3	.2	.1	.3	.1		17	17		
88/ 87										.3	.6	.9	.7	.7				43	43		
86/ 85						.1		.3	.9	.2	1.6	1.9	.7	.6	.3			84	83		
84/ 83						.1			.5	1.1	2.1	2.3	.7	.4	.3			120	120		
82/ 81					.1	.1	.2	.2	1.2	.1	1.4	1.7	.7	.5	.1			135	132		
80/ 79				.1	.3	.4	.2	.2	2.2	1.7	1.9	1.9	.3	.2				141	141		
78/ 77					.3	.2	.2	.3	2.3	2.5	1.3	1.6	.2					137	136		
76/ 75				.1	.1	.4	1.0	1.7	1.6	1.7	1.1	.6	.4					127	127	2	
74/ 73				.1	.2	.2	1.1	1.2	1.2	1.3	1.1	.3	.2					127	127	2	1
72/ 71		.1	.1	.1	.4	1.0	.2	1.0	1.1	1.3	1.2	.4						111	111	13	
70/ 69		.1	.1	.2	.4	.2	.4	1.1	1.3	.7	.2							96	96	43	3
68/ 67		.3	.2	.1	.4	.2	1.0	.3	.4	.4								55	55	83	13
66/ 65	.1	.4	.6	.4	.5	.2	.2	.4	.2	.1								53	53	128	17
64/ 63	.2	.4	.1	.3	.1	.4	.2	.1		.1								25	30	210	6
62/ 61		.1	.1	.4	.2	.3			.1									17	17	227	4
60/ 59	.1	1.0	.2	.3	.3	.1												34	34	178	2
58/ 57	.2	.3	.2	.2	.2													26	26	165	2
56/ 55	.1	.1	.1	.1														14	14	145	11
54/ 53	.1	.3	.1															7	7	95	11
52/ 51	.1	.1																3	3	70	15
50/ 49		.4		.1														7	7	22	13
48/ 47		.1	.1															3	2	5	10
46/ 45																				5	9
44/ 43																					8
42/ 41																					7
40/ 39																					6
38/ 37																					4
36/ 35																					3
34/ 33																					3
32/ 31																					2
30/ 29																					2
28/ 27																					1
26/ 25																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION
SAN FRANCISCO INTL. — STATION NAME
55-59,61-72 — YEARS
— MONTH
1100-1700 — HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
24/ 23																			
22/ 21																			
20/ 19																			
TOTAL	.4	4.3	3.3	2.9	4.1	9.8	7.1	11.1	12.7	19.4	19.3	8.9	2.3	2.0	1.2	.1		1412	1409

Element (X)	Σ_X^2	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3124412	60210	42.9	19.324	1409							
Dry Bulb	8091749	106299	75.3	7.955	1412			80.3	63.4	30.9		
Wet Bulb	5154245	84923	60.3	5.041	1409			9.9	.3			93
Dew Point	3473906	65748	48.8	9.215	1409		5.3	1.4	.1			91

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE / MAC

PSYCHROMETRIC SUMMARY

9327 — STATION NAME — YEARS — MONTH

HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																				TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31							
90/ 89															.2				1	1				
88/ 87											.3	.3	.4		.2				4	4				
86/ 85										.3	.5	.7	.9	.2	.2	.2			17	17				
84/ 83								.2	.3	.7	.2	.3	.1						13	13				
82/ 81					.2	.2	.3	.5	2.2	1.9	.5	.2	.2						36	36				
80/ 79				.2	.3	.3	1.4	1.3	1.2	1.2	.3	.2	.3						44	44				
78/ 77				.2	.5	1.2	.9	1.7	1.6	1.9	1.2	.3							53	53				
76/ 75				.7	.2	.9	2.1	1.4	2.6	2.3	1.4	.2	.3						66	66				
74/ 73			.2	.3	1.2	1.2	1.4	2.2	.9	1.3	.3	.3							56	56	1			
72/ 71			.3	.7	.5	.9	2.2	.5	1.2	.9	.2	.2							44	44	4	1		
70/ 69			.2	1.1	1.7	3.1	1.3	2.2	1.7	.7	1.1								77	77	14	1		
68/ 67	.3	.3	1.3	.7	1.5	1.7	1.4	1.4	.3	.5									54	54	33	7		
66/ 65		.3	.3	.3	.9	.3	.5	.7	.7	.2									29	29	47	14		
64/ 63	.7	.3	.5	.2	.5	.7	.2	.2	.2										24	24	67	19		
62/ 61		.3	.3	.1		.2	.2	.3	.2										13	13	85	30		
60/ 59	.7	.5	1.6		.3	.3	.2												20	20	92	36		
58/ 57		.3	1.2	.5	.5	.3													17	17	60	34		
56/ 55	.2		.5																2	2	63	49		
54/ 53		.2	.2																6	6	46	65		
52/ 51		.5																	3	3	32	52		
50/ 49																					22	59		
48/ 47		.2																	1	1	5	35		
46/ 45		.2																	1	1		34		
44/ 43		.2																	1	1	2	20		
42/ 41																						35		
40/ 39																						24		
38/ 37																						15		
36/ 35																						6		
34/ 33																						16		
32/ 31																								
30/ 29																						5		
28/ 27																						11		
26/ 25																						1		
24/ 23																						4		

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PSYCHROMETRIC SUMMARY

[illegible] PROCESSING BRANCH
USAF ETAC
[illegible] WEATHER SERVICE/MAC

43271 [illegible] STATION NAME [illegible] YEARS [illegible] MONTH

[illegible] 1100-2000 HOURS (L.S.T.)

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
TOTAL	[illegible]																		[illegible]	587	[illegible]

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1666507	29245	49.8	19.789	587			74.9	47.2	10.5		93
Dry Bulb	3086333	42333	72.1	7.547	587			74.9	47.2	10.5		93
Wet Bulb	2104499	33015	59.7	5.196	587			8.2	.2			93
Dew Point	1529972	29486	50.2	9.083	587		4.3	1.4				93

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

63271 — [illegible] AIR FORCE BASE/COMPLEX — 5 — YEARS — MONTH

HOURS

WET BULB TEMPERATURE DEPRESSION (F)

Temp (F)	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	TOTAL W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
76/ 75				.4				.4														
74/ 73					.7	.4	.1	.4														
72/ 71			.1	1.1	1.1	.7	.4											11	11			
70/ 69				2.5	1.6	1.4	.1											1	12	1		
68/ 67		.4	1.3	2.2	3.1	3.2	1.4											12	12	3		
66/ 65		1.6	4.2	4.6	2.7	2.2		.4										17	17	11		
64/ 63	.7	1.8	2.9	3.8	2.5	2.2	.7											15	16	23		
62/ 61	.7	1.3	4.3	4.2	1.8	1.5	.4	.1										19	19	39	26	
60/ 59	1.1	1.4	1.8	2.5	1.4	2.5	.1											10	10	51	24	
58/ 57		1.4	1.8	4.5	.7	1.4	.4											14	14	61	1	
56/ 55		1.1	.7	1.4	1.4	1.1												1	10	22	51	
54/ 53		.4	.1		1.4													2	2	24	3	
52/ 51		.7	.7															1	1	25	1	
50/ 49				.4														1	1	12	24	
48/ 47																				13	17	
46/ 45																				1	13	
44/ 43																					1	
42/ 41																						
40/ 39																						
38/ 37																						
36/ 35																						
34/ 33																					1	
32/ 31																						
TOTAL	2.5	.4	1.2	2.0	2.9	2.1	1.2	.4	.5	.4	1.0							1	1	278	278	278

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1378481	19179	69.0	14.134	278							
Dry Bulb	1117527	17587	63.3	5.001	278			26.8	2.1			93
Wet Bulb	912869	15869	57.1	5.035	278			1.3				93
Dew Point	775976	14564	52.4	7.107	278		.3					93

USAFETAC FORM 0-26-5 (OL A) 301 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93771 CAMP PEARY AAF, IRELAND (CPA) 21-54 1
STATION NUMBER STATION NAME YEARS MONTH

HOURS 2400-2200

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
76/ 75				1.0	.3	.3												3	3		
74/ 73				1.0	1.0													2	2		
72/ 71	.7	1.0	1.0	1.0														11	11	3	1
70/ 69	.7	1.7	6.1	4.1	1.7	.3	.3											35	36	9	5
68/ 67	.3	1.4	4.1	4.1	2.4													40	40	22	5
66/ 65	1.7	3.8	6.1	5.1	.3	.3												44	44	30	23
64/ 63	2.4	1.0	4.1	1.4		.3												53	55	42	30
62/ 61	1.4	4.1	4.1		.3	.3												32	32	73	52
60/ 59	1.7	4.1	3.1	2.4	.3													34	34	44	54
58/ 57	.3	3.1	3.4															20	21	26	37
56/ 55		1.7	.7															7	7	24	29
54/ 53																				10	23
52/ 51			.3															1	1	1	14
50/ 49																				1	9
48/ 47																					
46/ 45																					1
TOTAL	9.2	32.1	33.6	20.4	6.5	1.7	.3											293		293	293

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2097940	24518	84.0	9.953	293							
Dry Bulb	1223084	18892	64.5	4.445	293			30.7	3.4			90
Wet Bulb	1105223	17955	61.3	4.115	293			10.1				90
Dew Point	1037840	17384	59.3	4.092	293			3.4				90

USAFETAC FORM 0-26-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

MONTH

HOURS (L.S.T.)

Temp. °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
76 / 75			.2	.2														2		
74 / 73		.2	.6	.4														4		
72 / 71		1.1	1.3	.5														15	2	
70 / 69	.2	3.4	1.4	.4		.4												30	14	15
68 / 67	.6	6.1	4.5	.7	.4													42	35	21
66 / 65	1.1	5.7	4.1	2.2	.2	.2												61	51	52
64 / 63	1.1	7.2	3.6	.2	.4	.2												77	71	61	47
62 / 61	1.3	10.7	3.6	.6	.4	.2												85	88	77	64
60 / 59	1.7	12.1	4.3	1.5	.4													97	96	102	104
58 / 57	1.7	8.4	4.3	.4	.2													87	92	84	92
56 / 55	.9	6.7																76	76	64	62
54 / 53	.6	1.3																11	11	35	46
52 / 51		.2	.2															2	2	14	2
50 / 49			.6															3	3		11
48 / 47			.2															11	11	2	
46 / 45																				1	
44 / 43																					
42 / 41																					
TOTAL	10.0	87.0	32.1	9.7	4.9	2.2	.8											530	530	530	530

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4140126	46620	88.0	8.622	530							
Dry Bulb	2101311	33281	62.8	4.653	530			21.7	1.7			
Wet Bulb	1951372	32070	60.5	4.567	530			9.8				
Dew Point	1861203	31291	59.0	5.106	530			6.1				

USAFETAC FORM 0-26-5 (OL-A) JUL 66 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PSYCHROMETRIC SUMMARY

DATA PRESSED RADIO
SAP ETA
AIR WEATHER SERVICE MC

2

[redacted] CAPE PAGE AAF [redacted] STATION NAME | 51-55, 61-72 YEARS | [redacted] MONTH

[redacted]

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
80 / 79					.1																
78 / 77						.1															
76 / 75				.2	.4	.4															
74 / 73		.2	1.6	.8	.6	.1															
72 / 71	.3	1.1	1.6	1.1	.4	.1															
70 / 69	.2	2.0	3.5	1.7	.4																
68 / 67	.6	4.5	4.8	2.2	.9	.3	.1														
66 / 65	.2	5.4	7.1	3.3	1.1	.4															
64 / 63	1.1	7.3	9.8	3.6	.4	.1															
62 / 61	1.8	7.0	8.4	3.2	.8	.1															
60 / 59	1.3	6.8	8.7	1.4	.2																
58 / 57	.3	3.0	1.4	.2	.1																
56 / 55	.5	2.0	.8	.1																	
54 / 53	.2	.6	.1																		
52 / 51	.1	.1	.3	.1																	
50 / 49		.1	.1																		
48 / 47																					
46 / 45																					
44 / 43																					
42 / 41																					
TOTAL	7,443	8,092	9,913	3,[illegible]	904	1,[illegible]	.1											1461		1465	
																		1453		1453	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	10701399	123925	82.3	9.655	1453							
Dry Bulb	5997010	93334	63.9	4.881	1461			20.4	3.4			9[illegible]
Wet Bulb	5445340	88692	61.0	4.660	1451			11.5	.2			90
Dew Point	5133472	86020	59.2	5.238	1453			7.2				90

USAFETAC FORM 0-26-5 (OL-A) [illegible]

PSYCHROMETRIC SUMMARY

Temp. °F	WET BULB TEMPERATURE DEPRESSION (°F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
90 / 89																				1		
88 / 87																						
86 / 85																						
84 / 83																				24		
82 / 81																						
80 / 79																				56		
78 / 77		.1	.1	.0	.0	.0	.0	.0	.0									111		112		
76 / 75		.1	.3	.0	.2	.1	.2	.3	.1	.1								142		142		
74 / 73	.2	.4	1.3	.3	.0	.1	1.1	.6	.2	.1	.1							143		143	83	
72 / 71	.2	.5	1.2	2.4	.2	.4	.2	.2	.1	.1								141		126	71	15
70 / 69	.3	.6	2.6	4.3	2.3	1.0	.7	.3	.1									139		137	142	55
68 / 67	.1	1.2	4.2	4.2	2.3	1.2	.1	.1										136		167	127	88
66 / 65	.3	1.2	3.5	1.9	.9	.2	.1	.1										131		111	144	179
64 / 63	.3	1.7	1.8	1.1	1.1	.1	.1											121		121	202	214
62 / 61	.2	1.1	1.2	.1	.1													94		94	199	232
60 / 59		1.2	1.1	.2	.1	.1												46		46	120	222
58 / 57	.2	.2	.3	.1														14		14	94	152
56 / 55	.1		.1															4		4	54	126
54 / 53		.2																1		1	14	69
52 / 51		.1																1		1	10	66
50 / 49																						42
48 / 47																						17
46 / 45																						6
44 / 43																						2
42 / 41																						1
40 / 39																						1
38 / 37																						1
T.	.3	1.2	1.2	.2	.1	.1	.3	.1	.1										1454		1454	
																		1454		1454		

Σ_x	Σ_{x^2}	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
1 [illegible] 891	1 [illegible] 749	70.21	13.650	1454			70.1	10.3	2.5		[illegible]
[illegible] 857	1 [illegible] 043	70.2	5.828	1453			70.1	10.3	2.5		[illegible]
[illegible] 773	[illegible] 053	64.2	4.481	1450			28.1	2.2			[illegible]
[illegible] 32	[illegible] 259	60.2	5.550	1450			10.8	.3			[illegible]

2

PSYCHROMETRIC SUMMARY

[illegible] PRECIPITATION [illegible]
[illegible] ETA
[illegible] [illegible]

[illegible] (STATION) [illegible] (STATION NAME) [illegible] (YEARS) [illegible]

[illegible]

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B.	TOTAL W.B.	D.. Bu.b	TOTAL Wet Bulb	Dew P..
[illegible] 97											.1							1		1		
96/ 95										.1	.1	.1	.1		.1			4		4		
94/ 93									.1	.2	.4			.1				7		7		
92/ 91									.1	.2	.3	.1		.1				12		12		
90/ 89						.1		.1	.3	.6	.4	.3						14		14		
88/ 87						.1	.3	1.1	1.7	1.2	.6	.4	.2	.1				23		22		
86/ 85						.4	.7	.1	1.5	.5	.5	.3	.1					29		29		
84/ 83					.1	.7	1.2	2.1	1.7	.8	.4	.2	.1					35		35		
82/ 81			.1	.1	.3	1.1	2.2	2.6	2.1	.5	.3	.1						49		49		
80/ 79				.1	1.3	3.1	3.5	2.2	1.3	.4		.1						77		77	1	
78/ 77			.3	.5	1.2	2.3	2.7	2.1	.8	.4	.1							113		113	7	
76/ 75		.2	.4	.3	2.3	2.2	1.3	.5	.2	.1	.1							132		132	31	2
74/ 73	.1	.4	.3	1.3	1.3	1.3	1.3	.3	.2	.1	.1							111		111	91	11
72/ 71	.5	.2	.3	1.3	1.3	1.1	.3		.1									102		102	178	21
70/ 69		.3	1.3	1.3	.5	1.3	.3		.1									73		73	218	41
68/ 67	.3	.3	.3	.2	.2	.4		.1										45		45	223	107
66/ 65	.3	.3	.3	.1	.3	.1	.2											31		31	225	171
64/ 63	.3	.2	.2	.4	.1	.1												27		27	182	219
62/ 61	.1	.3	.2	.1														11		12	103	190
60/ 59	.1	.3	.1	.1														13		13	66	161
58/ 57	.2	.1	.1															7		7	45	147
56/ 55			.1															1		1	12	116
54/ 53		.1																1		1	5	70
52/ 51		.1																1		1	3	57
50/ 49																						36
48/ 47																						19
46/ 45																						11
44/ 43																						7
42/ 41																						3
38/ 37																						2
TOTAL	2.0	5.1	5.0	5.0	10.3	15.5	16.6	14.3	11.4	6.1	3.8	1.8	.5	.3	.1				1425		1424	
																	1424			1424		

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5197731	82745	58.1	10.590	1424							
Dry Bulb	8650617	110559	77.6	7.153	1425			82.9	48.6	30.4	.3	96
Wet Bulb	6270713	92037	66.7	4.435	1424			49.4	7.0			90
Dew Point	5279021	80291	60.6	5.963	1424			12.9	.8			96

FORM 0-26-5 (OL-A) REVISE PREVIOUS EDITIONS WHICH ARE OBSOLETE
JUL 64
USAFETAC

2

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

MONTH

HOURS

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
100 / 99														.1			1	1		
98 / 97													.1	.2			4	4		
96 / 95											.1	.1	.1	.2			[illegible]	[illegible]		
94 / 93										.4	.4	.3	.3	.1			3	3		
92 / 91						.1	.1		.4	.5	1.1	.3	.2	.3			[illegible]	[illegible]		
90 / 89								.2	1.2	2.3	.4	1.1	.4	.4	.1		[illegible]	[illegible]		
88 / 87						.1	.2	.7	2.5	2.3	1.2	.3		.1	.1		131	131		
86 / 85					.1	.4	.5	2.3	2.5	1.5	1.2	.4	.1	.1			141	141		
84 / 83					.4	.7	1.4	1.3	2.2	1.1	.7	.5	.1				127	127		
82 / 81				.1	.4	1.1	1.1	2.0	2.2	1.5	.4	.1					145	146	2	
80 / 79			.1	.4	.5	1.4	2.0	2.4	1.7	.7	.1	.1	.1				139	139	1	
78 / 77		.1	.3	.1	.2	1.2	1.0	1.5	.2	.2		.1					114	114	7	1
76 / 75		.3	.4	.4	1.5	1.7	1.4	.7	.2	.1	.1						102	102	42	1
74 / 73	.3	.2	.2	1.1	1.2	.4	.2	.2	.4	.2	.1						91	91	114	17
72 / 71		.1	1.0	.1	1.4	1.1	.6	.1									77	77	193	33
70 / 69		.2	1.1	.2	.4	.2	.1										44	44	231	64
68 / 67	.2	1.0	.3	.4	.5	.4	.1										47	46	237	111
66 / 65	.7	.6	.4	.2	.4	.1	.1										39	39	216	144
64 / 63	.2	.3	.4			.2											27	27	155	169
62 / 61	.1	.2	.2														16	16	92	174
60 / 59		.1	.1														4	4	69	181
58 / 57			.1														2	2	20	129
56 / 55			.1														1	1	10	146
54 / 53		.1															1	1	6	74
52 / 51																			2	40
50 / 49																				34
48 / 47																				14
46 / 45																				13
44 / 43																				13
42 / 41																				8
40 / 39																				7
38 / 37																				2
36 / 35																				1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP MADE AAF [illegible]/CHICAGO — STATION NAME
51-52, 61-72 — YEARS
1 — MONTH
1200-1700 — HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
TOTAL	[illegible]																	1397	1397

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4547575	79787	54.2	17.070	1397							
Dry Bulb	9022232	111854	79.9	7.821	1400			84.1	74.1	51.0	2.0	90
Wet Bulb	6380851	94209	67.4	4.455	1397			53.7	11.3	.2		90
Dew Point	5150920	84420	60.4	8.375	1397			14.8	1.4			90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSED BY ...
USAF ETAC
AIR WEATHER SERVICE / MAC

PSYCHROMETRIC SUMMARY

432[illegible] CAPE PAGE AGE KIRTLAND (C) [illegible]
STATION NAME

51-50, 51-57
YEARS

[illegible]
MONTH

[illegible] 1200-2000
HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
98/ 95														.4				1	1		
94/ 93										.6		.6	.3					5	5		
92/ 91										.9	.4	.5						11	11		
90/ 89								.9	.3	.5	.6		.6					22	22		
88/ 87							.6	.7	1.0	1.0	.9	.6	.3	.3				44	44		
86/ 85						.3	.2	1.6	2.0	.7	.9	.2	.3	.2				85	85		
84/ 83						.3	1.7	2.9	.4	1.3	.3	.2						64	64		
82/ 81					.6	1.9	2.6	1.9	1.5	.8	.3	.3	.2					59	59		
80/ 79				.5	1.4	2.2	1.7	2.3	1.2	.2	.3	.2						59	59	1	
78/ 77			.5	1.5	1.9	1.[illegible]	[illegible]	[illegible]	.3	.3								42	42	2	
76/ 75		.5	.8	1.3	1.7	1.4	1.3	.7	.2									47	47	6	
74/ 73		.5	1.0	1.7	1.9	1.3	.6	.7	.3		.2							50	50	12	3
72/ 71	.3	.5	1.2	1.5	1.3	1.2	.3	.4	.2									41	41	10	1
70/ 69		.3	1.2	1.2	1.5	.7	.2	.2										35	35	24	12
68/ 67	.2	2.9	.5	.3	.3	.2												6	6	35	43
66/ 65	.2	1.2	.3	1.5	.5													24	24	101	97
64/ 63	.5	.3	1.0		.2													17	17	65	93
62/ 61	.2	.3	1.2	.2														11	11	42	55
60/ 59	.3	.3	.7															4	4	49	8
58/ 57		.2																1	1	18	52
56/ 55																				9	42
54/ 53																					30
52/ 51																					17
50/ 49																					11
48/ 47																					6
46/ 45																					3
44/ 43																					1
42/ 41																					1
40/ 39																					1
38/ 37																					3
TOTAL	2.0	7.2	8.0	10.8	12.3	11.1	12.0	14.5	7.9	6.1	3.7	1.9	1.5	.5				594	594		594
																		594		594	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2390302	36186	60.9	17.093	594							
Dry Bulb	3347844	45680	76.9	7.574	594			80.8	44.4	35.5	.9	90
Wet Bulb	2894202	39616	66.7	4.511	594			46.5	7.7	.2		90
Dew Point	2239290	36288	61.1	6.149	594			15.2	1.1			90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — STATION NUMBER
CAMP FOSTER AAF (NAHA/OKINAWA) — STATION NAME
21-53 — YEARS
JUL — MONTH
0100-2300 — HOURS (L.S.T.)

Temp. (F)	WET BULB TEPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
94/ 83								.3										1	1		
92/ 81						.3		.3		.3								2	2		
90/ 79					.3	1.0	.7	.7		.7								3	3		
88/ 77			.3	.7	1.0	.7	.7											12	12		
86/ 75			1.4	1.4	3.0	2.1	.7											24	24		
84/ 73			1.7	3.4	2.4	.3		.3										36	36	1	
82/ 71		.3	3.1	4.5	2.4	1.4	.7											52	52	14	4
80/ 69		2.1	3.4	4.1	6.1	1.4												52	52	17	9
78/ 67		3.1	6.9	1.4	2.4		.7											42	42	4	18
76/ 65	.7	4.2	4.8	2.4	.3	.7												14	14	15	30
74/ 63	1.4	1.4	3.4	.7	.3	.3												7	7	23	47
72/ 61	.7	.3	2.4	1.7	.3													17	17	33	56
70/ 59	.7	1.7	1.7	1.4	.3													15	15	36	35
68/ 57	.7	1.4	.3															7	7	20	31
66/ 55		.3																3	3	17	23
64/ 53																				2	17
62/ 51																					7
60/ 49																					1
58/ 47																					1
TOTAL	4.1	13.1	29.9	21.6	15.6	7.9	2.1	1.7		.7								291		291	
																	291		291		

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	17564990	22324	76.7	12.291	291							
Dry Bulb	1302291	19993	68.7	5.453	291			58.5	22.3	2.5		90
Wet Bulb	1182711	18511	63.6	4.233	291			24.7	.3			90
Dew Point	1078469	17659	60.7	4.861	291			6.4				90

FORM 0-26-5 (OL-A) JUL 64 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSED BY [illegible]
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

[illegible] STATION | CAMP EAGLE AAF [illegible] STATION NAME | 51-54 YEARS | [illegible] MONTH

[illegible] 2000-2[illegible] HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
82/ 81			.3															1	1		
80/ 79	.3	.3	1.1		.3													1	1	1	1
78/ 77	.6	5.1	3.5	.3	.3			.3										4	4	1	
76/ 75	1.3	5.9	3.6	1.1	1.3													9	8	31	23
74/ 73	3.2	6.6	3.5	1.3	1.1	.3												15	11	40	41
72/ 71	2.4	5.4	3.2	1.6	2.7	.3												15	14	32	40
70/ 69	1.6	5.4	4.0	.8	.3													12	12	45	42
68/ 67	3.2	5.1	3.2	1.6	.3													13	13	33	44
66/ 65	1.1	3.0	.5	1.6	.3													6	6	42	42
64/ 63	.3	1.9	.3	.3														11	11	42	32
62/ 61		.8	.3		.3													1	1	11	6
60/ 59				.3														2	2	12	13
58/ 57			.3															3	3	1	
56/ 55																				3	1
54/ 53																				3	1
52/ 51																					3
50/ 49																					1
TOTAL	19.5	59.2	29.9	9.1	7.3	.3	.3	.3										372		372	371

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2865491	32443	87.2	9.859	372							
Dry Bulb	1904622	26568	71.4	4.391	372			81.7	40.0	1.0		93
Wet Bulb	1760787	25531	68.6	4.801	372			60.5	22.7			93
Dew Point	1690928	24960	67.3	5.618	371			52.6	20.1			93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

432/1 STATION — CAMP PAGE AAF [illegible] STATION NAME — 51-55, 60-64 YEARS — JUL MONTH

2100-2400 HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	W.B. Dry Bulb	TOTAL Wet Bulb	Dew Point
82/ 81					.2													1	1		
80/ 79		.3	.5		.2													1	1		
78/ 77	1.0	5.4	2.0	.1														9	11	11	7
76/ 75	2.6	10.3	1.9	.3														25	25	23	24
74/ 73	3.4	8.5	2.0	.3														14	14	94	10
72/ 71	3.3	7.7	1.1	1.0														13	14	91	91
70/ 69	2.0	5.5	1.3	1.5	.7													22	22	69	77
68/ 67	3.6	5.7	2.6	.3	.2													14	14	28	7
66/ 65	1.3	5.4	2.0	.5														9	9	72	5
64/ 63	.8	2.8	1.6	.8														33	33	24	5
62/ 61	.2	.8	.9															11	11	40	4
60/ 59		.3	.3															6	6	13	2
58/ 57		.5	.9															6	6	5	21
56/ 55		.3	.2															5	5	4	12
54/ 53			.2															1	1	5	3
52/ 51		.2																1	1	1	2
50/ 49																				1	1
TOTAL	19.8	59.2	17.6	5.3	1.1													213		613	214

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5124458	52850	91.1	7.270	613							
Dry Bulb	3083701	43379	70.8	4.780	613			74.2	37.9	.5		93
Wet Bulb	2927134	42240	68.9	5.103	613			62.5	26.5			93
Dew Point	2831108	41650	68.0	5.774	613			59.3	24.7			93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

[illegible] STATION NAME [illegible] YEARS [illegible] MONTH

[illegible] HOURS

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
86 / 85							.1														
84 / 83						.1													1		
82 / 81				.1	.2	.1													1		
80 / 79			.2	1.1	1.0	.6	.1												26	26	
78 / 77	.1	5.0	3.9	.3	.4	.1												165	165	19	9
76 / 75	.1	1.1	2.2	.7	.2													220	220	214	122
74 / 73	3.3	8.2	3.3	.7	.3	.2												245	245	277	266
72 / 71	3.3	7.5	3.2	1.5	.7	.1												231	231	214	277
70 / 69	3.1	8.1	2.8	2.2	.2	.2	.1											219	219	208	217
68 / 67	2.1	4.5	2.0	1.6	.2													155	155	101	165
66 / 65	1.2	2.3	1.1	.3	.1													72	72	133	127
64 / 63	.2	1.5	1.0	.2	.1													37	37	107	111
62 / 61	.1	.6	.2	.1														20	20	59	54
60 / 59		.1	.2	.1														6	6	42	56
58 / 57	.1	.2	.1															7	7	14	43
56 / 55		.1																1	1	6	21
54 / 53			.1															1	1	3	10
52 / 51		.1																1	1	1	2
50 / 49																				1	
TOTAL	17.345.423.81	.4	2.6		.1	.1													1474		1474
																	1474		1474		

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11917071	131883	89.5	8.917	1474							
Dry Bulb	7631418	105856	71.8	4.461	1474			82.0	43.8	1.3		93
Wet Bulb	7172399	102593	69.6	4.143	1474			68.6	32.2			93
Dew Point	6945568	100870	68.4	2.387	1474			63.7	24.7			93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — LAKE PAGE AIRPORT/CHICKEN — 51-54,56,61-72 — 1 — 0100-1100
STATION — STATION NAME — YEARS — MONTH — HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	>31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
92/ 91						.2													1		
90/ 89					.1		.3	.2											1		
88/ 87			.1		.4	.6	.5	.3	.1	.1	.4							7	27		
86/ 85			.1	.2	1.7	1.3	.3	.2	.1									2	66		
84/ 83		.1	.4	2.3	2.4	1.1	.2	.2	.1	.1	.1							111	111	2	
82/ 81		.2	2.3	3.4	2.3	.5	.5	.3										146	146	3	1
80/ 79		1.1	3.4	4.3	1.3	1.7	.1	.3	.1									191	191	34	4
78/ 77	.2	3.9	4.0	3.2	2.1	1.2	.7	.1										236	236	162	51
76/ 75	1.0	4.0	3.0	3.2	1.0	.9	.4	.1										234	234	294	199
74/ 73	1.7	3.1	4.2	1.0	1.9	.7	.1											175	175	249	237
72/ 71	1.0	2.0	2.2	1.1	1.0	.3	.1											112	112	207	207
70/ 69	1.0	1.0	1.4	.3	.2	.3												53	53	186	182
68/ 67	.3	1.1	.5	.6	.0	.1												46	46	134	134
66/ 65	.1	.4	.1	.2	.3													17	17	103	134
64/ 63	.1	.1	.3															6	6	47	66
62/ 61		.1		.1														2	2	23	60
60/ 59		.1																1	1	19	44
58/ 57																				5	30
56/ 55																				1	17
54/ 53																					14
52/ 51																					4
TOTAL	5.9	10.5	21.5	22.4	17.2	7.1	3.0	1.0	.3	.1	.1								1463		1463
																		1463		1463	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9315946	113264	76.8	12.072	1463							
Dry Bulb	8701961	112591	77.0	5.015	1463			91.3	75.9	29.1		93
Wet Bulb	7589459	102169	71.9	4.476	1463			80.7	47.2	.8		93
Dew Point	7110467	101079	69.5	5.464	1463			67.8	34.6	.6		93

USAFETAC FORM 0-26-5 (OL A) JUL 64 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

[illegible] CAMP PAGE AGF [illegible] 21-54,55,61-72
STATION NAME YEARS

[illegible] 1200-1800
HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
98/ 97										.1	.1				.1						
96/ 95							.1		.1	.1				.1							
94/ 93						.1	.1	.3	.5	.8	.7	.1	.1					[illegible]	[illegible]		
92/ 91		.1			.3	.3	1.3	1.3	.3	.3	.1	.1	.1					[illegible]	61		
90/ 89				.1	.2	2.1	2.3	1.7	.7	.3	.1	.1						115	114	1	
88/ 87				.2	1.1	1.3	2.4	.7	.5	.2	.1							141	141		1
86/ 85		.1		1.3	2.5	3.0	2.0	1.0	1.0	.2		.1						177	176		
84/ 83		.1	.3	2.0	2.2	2.7	1.3	1.3	.3	.1								157	157	15	2
82/ 81		.2	2.0	2.0	2.3	2.1	1.3	1.3	.1	.1								134	134	22	3
80/ 79		1.2	3.1	2.2	1.5	1.2	1.1	.3	.1									135	135	126	14
78/ 77	.3	3.2	1.4	1.0	1.0	.5	.0	.2	.1									132	132	77	73
76/ 75	1.2	1.7	1.1	.3	.2	.1	.1	.3										113	113	270	231
74/ 73	1.0	1.1	.8	.4	.3	.3	.3	.1										71	70	208	247
72/ 71	1.0	1.1	.5	.3	.2	.2	.1											56	56	185	224
70/ 69	.3	1.4	.1	.2	.1													36	36	152	154
68/ 67	.1	.3	.1	.2	.3													15	15	92	142
66/ 65			.1	.1														2	2	34	102
64/ 63			.1															1	1	24	51
62/ 61																				18	75
60/ 59																				5	26
58/ 57																					24
56/ 55																					21
54/ 53																					6
52/ 51																					2
50/ 49																					1
TOTAL	.9	11.0	10.0	12.1	12.0	12.6	13.9	9.4	4.5	1.7	1.0	.3	.2	.1	.1				1432		1432
																		1432		1432	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7235859	99313	69.4	15.600	1432							
Dry Bulb	9661367	117299	81.9	6.091	1432			92.7	86.1	61.0	2.3	93
Wet Bulb	7822109	105053	73.8	4.346	1432			87.7	59.9	5.0		93
Dew Point	7086930	100420	70.1	5.602	1432			71.4	37.7	1.2		93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

3327th — C-E Proc Anl [illegible] — 1-54,57,61-72 — [illegible]
STATION NAME — YEARS — MONTH

[illegible] 1200-1700

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
104/103													.1					1	1		
102/101													.1					1	1		
100/ 99												.1			.1			2	2		
98/ 97								.1	.3	.4	.4		.1	.1		.1		1	1		
96/ 95							.1	.4	.5	.4	.1	.1		.1	.1			2	2		
94/ 93						.3	.1	.4	.1	.3	.4	.3	.1	.1	.1			3	3		
92/ 91					.2	.1	.4	1.0	1.0	.4	.3			.1				3	10		
90/ 89			.1		.3	.4	1.7	2.0	1.4	1.2	.4	.2	.1					10	13		
88/ 87			.1	.1	.1	.4	2.3	3.2	1.1	1.0	.4	.4						14	14	3	1
86/ 85				.1	.7	2.0	2.0	1.2	2.1	1.6	.1	.1	.1					12	12	4	4
84/ 83			.1	.7	1.7	2.3	1.0	1.1	1.1	.3	.1							11	11	17	7
82/ 81	.2	.4	1.7	2.2	1.3	1.0	1.0	1.2	.1	.1								14	14	32	19
80/ 79	.1	2.2	2.3	1.3	.9	1.3	.3	.1										11	11	143	71
78/ 77	.1	2.1	1.9	1.3	1.3	.3	.4	.2										10	10	301	129
76/ 75	.3	2.3	1.7	.7	.6	.2	.3	.2										7	7	259	216
74/ 73	.2	1.5	1.1	.5	.2		.1	.1										11	11	193	254
72/ 71	.3	.6	.7	.2	.3	.1	.1											6	6	158	214
70/ 69	.4	.7	.2	.3	.1													2	2	133	142
68/ 67	.1	.4	.3															1	1	79	113
66/ 65		.1	.1															1	1	25	103
64/ 63		.1	.3	.1														1	1	17	85
62/ 61			.1															1	1	15	62
60/ 59																				5	50
58/ 57																				1	17
56/ 55																					20
54/ 53																					10
52/ 51																					5
50/ 49																					2
TOTAL	3.0	10.5	10.7	9.7	11.1	12.4	14.5	11.0	6.7	3.7	2.1	.6	.4	.2	.3	.1		1416	1416		1416
																		1416		1416	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6722075	94565	66.8	16.954	1416							
Dry Bulb	9932740	118202	83.5	6.815	1416			92.3	87.1	66.8	7.8	93
Wet Bulb	7844280	105208	74.3	4.399	1415			88.6	63.2	7.7		93
Dew Point	7049121	99504	70.3	5.763	1416			70.6	39.4	1.6		93

FORM 0-26 5 (OL A) JUL 64 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

2

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	TOTAL W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
98/ 97								•														
96/ 95										•				•						•		
94/ 93							•	•	1.1	•	•	•	•	•								
92/ 91						•	1.1	1.4	•	•	•		•	•								
90/ 89			•		•	1.1	•	•	•		•	•										
88/ 87			•	•	•	•	1.1	1.1	•	•		•										
86/ 85		•	•	•	1.1	2.1	1.1	•	•	•												
84/ 83		•	•	2.1	2.3	1.1	1.2	1.1	•	•												
82/ 81		•	1.1	3.2	2.3	1.2	2.	•	•													
80/ 79	•	1.1	3.2	2.2	1.2	1.1	1.1	•														
78/ 77	•	2.3	1.1	1.2	1.1	•	•	•	•													
76/ 75	•	1.2	1.2	1.1	1.1	•	•	•														
74/ 73	•	2.2	1.1	•	•	•																
72/ 71	•	1.1	•	•	•	•	•															
70/ 69	•	1.1	•	•	•																	
68/ 67	•	1.1	•		•																	
66/ 65		•	•		•																	
64/ 63		•		•																		
62/ 61		•																				
60/ 59																						
58/ 57																						
56/ 55																						
54/ 53																						
52/ 51																						
TOTAL	4.0	14.4	12.3	14.0	9.9	13.2	12.0	6.7	3.6	1.5	•	.5	.5	.5								

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3530473	46873	71.9	6.713	652							
Dry Bulb	4298747	52767	80.9	6.591	652			91.4	83.2	55.1	3.1	93
Wet Bulb	3531864	47892	73.5	4.638	652			80.0	56.5	6.0		93
Dew Point	3235978	45786	70.2	5.040	652			71.3	39.1	2.3		93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PSYCHROMETRIC SUMMARY

STATION NAME


YEARS

Temp F	WET BULB TEMPERATURE DEPRESSION (F.) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B.	TOTAL W.B.	TOTAL Wet Bulb Dew P
86/ 84					.3													1		
84/ 83				.5	.5	.5					.5							2	1	
82/ 81			1.1	1.9	.5	.5					.5							3	1	1
80/ 79		.5	1.6	3.8	2.7	1.5	.5	.5										11	11	3
78/ 77	.5	5.4	3.8	3.3	2.7	1.5		.5										17	10	2
76/ 75	1.6	4.3	4.3	3.3	2.2	.5	.5	.5										22	6	3
74/ 73	1.3	2.7	4.2	2.9	2.9	1.3	.5											17	10	3
72/ 71	2.2	4.3	3.3	2.2	1.9	.5												14	5	1
70/ 69	.5	1.9	1.9	2.4	1.3													7	4	2
68/ 67	.5	3.2	1.1	.5	1.1	.5												8		1
66/ 65		1.6		.3	.3													2		
64/ 63	.5	.5			.5													1	1	2
62/ 61		.5		.5														1	1	1
60/ 59																				1
58/ 57																				2
56/ 55																				1
54/ 53																				
52/ 51																				1
TOT L	7.5	34.5	29.1	21.7	15.9	4.9	1.1	.5		.5	.5							37.		37.
																		372		372

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2599433	9,771	72.71	12.079	372							
Dry Bulb	2057470	27612	74.2	4.630	372			88.5	59.2	11.5		93
Wet Bulb	1843937	26123	70.2	4.952	372			71.2	32.7	1.2		93
Dew Point	1747944	25400	68.3	6.064	372			61.0	26.0	.5		93

USAFETAC FORM 0-26 5 (OL A) JUL 64

AD-A088 949 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
CAMP PAGE AAF, CHUNCHON, KOREA. REVISED UNIFORM SUMMARY OF SURF--ETC(U)
MAR 74
UNCLASSIFIED USAFETAC/DS-80-075 NL

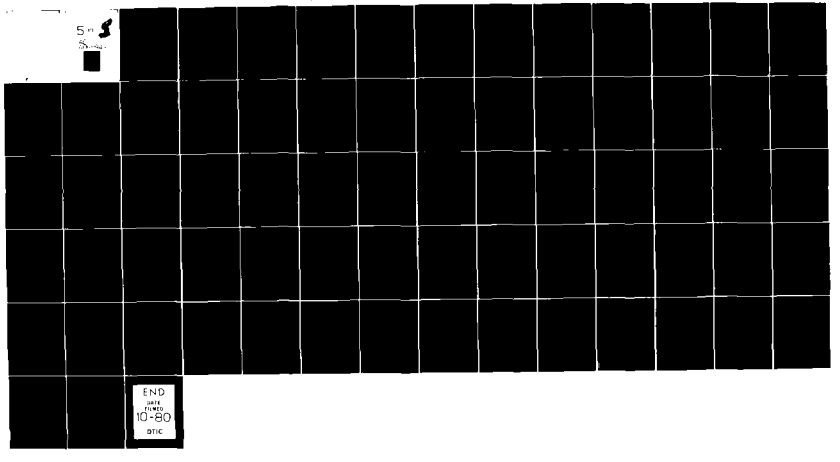

END
DATE FILMED
10-80
DTIC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION

CAMP PAGE AAF KOREA/CHUNCHON — STATION NAME

51-54 — YEARS

— MONTH

PART 1 — 0000-2200 HOURS L.S.T.

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
80/ 77	.5	2.4	3.2	1.1														7	7	41	
78/ 77	.5	8.9	2.4	1.6	.3													21	12	15	7
76/ 75	2.7	11.1	5.7	.8	.3	.3												71	70	72	55
74/ 73	1.1	12.7	3.0	.3	1.1													57	67	55	56
72/ 71	1.9	8.4	2.2	1.1	.5													53	56	86	77
70/ 69	.8	8.0	2.7	1.1	.3													45	56	37	6
68/ 67	.5	3.5	1.1	.5	.3													22	22	41	32
66/ 65	.5	.3	.3	.3														7	7	27	2
64/ 63	.5	.8	1.6															11	11	9	2
62/ 61			.8															3	3	12	11
60/ 59	.3	.5																1	1	7	5
58/ 57																				4	1
56/ 55																					2
54/ 53																					1
TOTAL	9.4	57.1	22.9	7.3	2.7	.5												371	372	371	371

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3003891	33265	89.7	7.578	371							
Dry Bulb	1996155	27207	73.1	4.125	372			87.0	56.0	2.7		23
Wet Bulb	1871497	26299	70.9	4.425	371			78.2	36.6			9
Dew Point	1820178	25922	69.9	4.930	371			73.2	29.8			93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 (STATION) CAMP PAGE AAP KIRBY/CHUCH JI (STATION NAME) 51-54,61,63-67,70 (YEARS) (MONTH)

(HOURS) 0200-0500

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
82/ 81			.2															1	1		
80/ 79		1.0	1.0	.0	.1													4	4	4	1
78/ 77	.0	6.1	3.8	.1	.2													14	14	14	1
76/ 75	4.0	13.5	3.2	.0	.2													21	21	92	71
74/ 73	4.2	11.5	2.2	.1														119	119	144	113
72/ 71	2.7	11.2	1.8	.1	.1													99	99	109	124
70/ 69	1.0	8.9	2.1	.2														80	80	103	112
68/ 67	1.3	6.4	1.0	.1														56	56	57	67
66/ 65	1.0	2.2	1.3	.2														26	26	47	54
64/ 63	.3	.5																5	5	22	31
62/ 61		.5	.0															1	1	9	14
60/ 59		.5																1	1	4	6
58/ 57	.3	.2	.0															4	4	8	14
56/ 55																					2
54/ 53																				3	
52/ 51																					3
TOTAL	16.0	82.1	16.0	.9	1.0													436	436	626	626

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	536[illegible]	57812	92.4	6.298	626							
Dry Bulb	3293271	45331	72.4	4.135	626			85.7	50.8	1.0		93
Wet Bulb	3143029	44283	70.7	4.208	626			77.7	37.7			93
Dew Point	3078761	43811	70.0	4.494	626			74.9	30.2			93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

4321 CAMP PAGE AAF KOREA/CHUCHON 51-54,56,61-71 AUG
STATION STATION NAME YEARS MONTH

PAGE 1 0600-0800 HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
86/ 85						.1												1	1		
84/ 83			.1		.1													2	4		
82/ 81		.1	.3	.1	.3	.1												11	12		
80/ 79		1.0	2.2	1.0	.5	.1												77	77	5	1
78/ 77	.5	5.7	3.0	1.4	.1		.1											152	152	49	31
76/ 75	3.9	11.4	3.1	1.1	.5	.1												241	242	217	153
74/ 73	3.7	8.5	3.4	.9	.2													233	233	244	259
72/ 71	4.0	8.0	2.9	.6	.4													223	223	230	240
70/ 69	2.9	7.4	2.6	.4	.1													187	187	241	236
68/ 67	1.0	4.1	1.1	.3	.1													92	92	137	150
66/ 65	1.1	3.0	.4	.1	.1													65	65	107	123
64/ 63	.6	1.2	.1	.3														30	30	57	80
62/ 61	.5	.9		.1														22	22	29	40
60/ 59	.3	.1	.1															10	10	23	36
58/ 57	.4	.2																3	6	10	17
56/ 55	.1	.1																3	3	7	12
54/ 53																				1	1
52/ 51																					3
TOTAL	19.2	52.0	19.1	6.4	2.3	.4	.1											1398	1399	1398	1396

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11725163	127567	91.2	7.787	1398							
Dry Bulb	7383514	101438	72.5	4.515	1399			83.8	50.5	2.7		23
Wet Bulb	7000701	98741	70.6	4.364	1398			77.4	37.0	.1		93
Dew Point	6827152	97478	69.7	4.659	1398			72.2	29.5			94

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP PAGE AAF [illegible]/CHUNCHON — STATION NAME
51-54,57,61-71 — YEARS
— MONTH
E I 0900-1100 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
92/ 91						.1	.1	.1										[illegible]	3		
90/ 89					.1	.4	.1		.1										9		
88/ 87					.7	.7	.[illegible]	.[illegible]										[illegible]	[illegible]		
86/ 85		.1	.1	1.4	2.7	2.0	.5	.5										[illegible]	[illegible]		
84/ 83		.1	.7	2.5	2.7	1.7	.6	.1										117	117	3	
82/ 81		.1	3.1	4.6	2.[illegible]	1.2	.4	.1										1[illegible]	1[illegible]	11	[illegible]
80/ 79		1.1	5.6	3.9	2.3	1.5	.5											2[illegible]7	207	59	12
78/ 77	.3	3.4	5.3	3.1	2.1	.7	.[illegible]	.1										213	213	187	75
76/ 75	.6	4.9	3.6	2.6	1.7	.7	.1											200	200	279	207
74/ 73	.3	3.9	2.9	2.[illegible]	1.1	.4												1[illegible]	154	250	271
72/ 71	.4	2.3	2.0	.5	.7	.1												[illegible]2	82	222	211
70/ 69	.4	1.8	1.2	.4	.1	.1												[illegible]3	53	152	187
68/ 67	.1	.7	.7	.2	.1	.1												[illegible]5	35	108	147
66/ 65		.5	.4	.1	.1													15	15	54	10[illegible]
64/ 63		.4		.2														[illegible]	8	25	6
62/ 61		.1																2	2	15	4[illegible]
60/ 59																				4	2[illegible]
58/ 57																				2	[illegible]
56/ 55																					[illegible]
54/ 53																					[illegible]
52/ 51																					[illegible]
TOTAL	2.9	19.3	29.[illegible]	21.3	10.4	4.[illegible]	3.2	.3	.1										1374		1374
																		1374		1374	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	8798012	108860	79.2	11.231	1374							
Dry Bulb	8360643	106957	77.8	5.030	1374			91.3	80.5	35.1		93
Wet Bulb	7311775	100069	72.8	4.155	1374			86.0	53.4	2.7		93
Dew Point	6878373	96997	70.6	4.760	1374			75.4	38.5	.4		93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 STATION | CAMP PAGE AAF KOREA/CHUNCHON STATION NAME | 51-54,56,61-71 YEARS | A,C MONTH

[illegible] 1 1200-1400 HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
98/ 97										.1								2	2		
96/ 95							.1	.4	.2	.1	.1							12	12		
94/ 93						.3	.9	.7	.2	.4								34	34		
92/ 91					.4	.7	2.2	2.1	.8	.1								53	53		
90/ 89					.3	2.4	3.9	2.3	.7	.5								144	130		
88/ 87			.1	.4	2.0	4.2	3.6	1.3	.5	.3								170	170		
86/ 85			.4	1.1	3.2	4.6	3.0	1.3	.7	.1								193	193	1	
84/ 83			.5	2.5	3.4	3.2	1.6	1.1	.2									170	170	13	2
82/ 81		.1	1.6	2.1	2.1	2.4	1.0	.7	.4									149	149	55	10
80/ 79		1.3	2.2	1.3	2.2	1.6	.7	.6										135	135	163	23
78/ 77	.2	3.0	1.1	1.4	.8	.7	.4											105	105	291	125
76/ 75	.4	1.8	1.2	.8	.5	.2	.4	.1										75	75	287	212
74/ 73	.2	1.2	.5	.3	.1	.1												33	33	187	251
72/ 71	.2	.7	.7	.2	.1		.1											29	30	157	211
70/ 69	.2	.4	.3		.1	.1												15	15	103	173
68/ 67		.2	.1		.1													6	6	53	137
66/ 65		.1																1	1	29	73
64/ 63		.3																4	4	7	59
62/ 61																				6	28
60/ 59																				2	20
58/ 57																					10
56/ 53																					6
52/ 51																					1
TOTAL	1.3	9.1	8.7	10.1	15.4	20.8	16.5	10.0	3.8	1.5	.1							1354	1355	1354	1354

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	6223221	92203	68.1	13.443	1354							
Dry Bulb	9477163	113053	83.4	5.746	1355			92.7	89.2	70.0	3.3	94
Wet Bulb	7611439	101373	74.9	4.006	1354			90.0	68.5	9.2		93
Dew Point	6903559	98659	71.2	6.869	1354			78.6	62.8	1.3		93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47271 — STATION
CAMP PAGE AAF, KOREA/CHUNCHON — STATION NAME
51-54, 56, 61-71 — YEARS
A... — MONTH
... 1 — 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
100/ 99									.1	.1								?	2		
98/ 97						.1			.3	.1		.1							8		
96/ 95						.1	.3	.9	.4	.4	.3	.1						[illegible]	35		
94/ 93					.1	.7	.7	2.5	1.7	.5	.3	.1						[illegible]	90		
92/ 91					.1	.7	2.3	3.7	2.1	.7	.4	.1						136	136		
90/ 89					.6	2.5	3.6	3.7	.8	.8	.4							[illegible]	160		
88/ 87			.1	.1	1.5	3.0	3.4	2.3	1.4	.4								159	159	2	
86/ 85			.1	.5	2.0	2.5	2.6	1.7	.7	.1								143	143	4	1
84/ 83			.0	1.9	2.6	2.2	1.6	1.0	.7									153	153	21	3
82/ 81		.2	1.2	1.9	.9	1.4	1.1	1.3	.1									111	111	61	16
80/ 79		1.6	1.6	1.2	.9	.7	.4	.0	.1									96	96	172	53
78/ 77	.4	3.1	1.2	1.0	1.0	.7	.4											105	105	267	127
76/ 75	.5	1.3	.6	.3	.5	.1	.2											47	47	308	216
74/ 73	.1	1.0	1.3	.4			.1											39	39	154	225
72/ 71	.3	.8	.2	.1		.1												21	21	140	194
70/ 69	.2	.1	.1	.1		.1												8	8	101	180
68/ 67	.2	.1	.2															8	8	52	117
66/ 65		.4																5	5	19	72
64/ 63	.1																	2	2	13	74
62/ 61																				2	52
60/ 59																					23
58/ 57																					11
56/ 55																					5
54/ 53																					1
TOTAL	1.9	8.8	7.3	7.9	10.6	15.0	16.8	18.0	8.5	3.1	1.8	.3						1336		1336	
																			1336		

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.
Rel. Hum.	5998490	87204	65.3	15.151	1336
Dry Bulb	9680167	113411	84.9	6.294	1336
Wet Bulb	7577912	100476	75.2	4.009	1336
Dew Point	6793985	95037	71.1	5.008	1336

Mean No. of Hours with Temperature	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.			92.5	89.9	73.4	9.4	93
Dry Bulb			90.6	70.2	11.8		93
Wet Bulb			76.4	42.3	1.7		93
Dew Point							

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 51-54,56,61-62,64-67 (YEARS) 4 (MONTH)

PAGE 1 1800-2000 (HOURS LST)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
98/ 97									.2										2		
96/ 95										.2								1	1		
94/ 93								.2	.5	.2								3	3		
92/ 91					.2	.2	1.0	1.0	.5		.4							23	24		
90/ 89				.7	2.2	3.0	1.6	.5	.3	.3								53	53		
88/ 87				2.2	2.6	2.6	1.7	.7										89	89		
86/ 85			.7	1.0	3.9	2.8	2.2	.8	1.0									72	72		
84/ 83		.2	.8	2.8	2.3	1.7	1.5	.8	.2									52	52	4	
82/ 81		.8	3.5	4.3	1.3	2.0	1.2	.3										31	31	16	4
80/ 79		2.5	2.5	2.2	1.7	1.5	.8											17	17	63	12
78/ 77	.2	4.0	3.0	1.3	1.2	.7		.3										64	64	151	55
76/ 75	1.8	1.5	.8	1.7	1.7	.2	.2	.2										46	46	123	119
74/ 73	1.0	.3	1.2	1.0	.2	.3	.2											25	25	71	111
72/ 71		1.2	.5	.5	.7		.2											15	11	52	73
70/ 69	.2	1.7																11	11	66	63
68/ 67	.2	.7																3	3	33	65
66/ 65		.5	.2															4	4	8	34
64/ 63	.2	.2																2	2	12	32
62/ 61																				2	19
60/ 59																				1	9
58/ 57																					3
56/ 55																					3
52/ 51																					1
TOTAL	3.5	13.4	13.1	14.7	15.4	14.2	12.7	7.3	4.0	.7	.5								604		604
																		604		604	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3301931	43797	72.5	14.463	604							
Dry Bulb	4063031	49407	81.8	5.979	604			92.1	86.0	61.1	1.8	93
Wet Bulb	3362869	44999	74.5	4.147	604			89.5	65.9	7.4		93
Dew Point	3098070	43156	71.4	4.962	604			77.9	46.7	1.7		93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAMP PROG AAF KOREA/CHUNCHON 51-53,55 ALL 2100-2300
STATION STATION NAME YEARS MONTH HOURS (LST)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
86/ 85					.3													1	1		
84/ 83			.3	.3															1		
82/ 81		.6	2.1	2.4	1.3	.3													26		
80/ 79		5.6	7.2	3.7	1.1		.3												68	3	
78/ 77	.5	10.7	7.2	1.8	1.1	1.1	.3												95	47	
76/ 75	.8	8.6	3.2	2.4	1.3	.3												61	61	83	
74/ 73	.5	4.5	3.5	1.4	.5													43	43	72	
72/ 71	.3	3.7	3.7	1.1	.3													34	34	40	
70/ 69	1.1	2.9	2.1	.3	1.0													30	30	45	40
68/ 67	.5	1.9		.5	.5													13	13	42	
66/ 65	.3		.5		.3													4	4	13	
64/ 63		.6																3	3	5	
62/ 61																				10	
60/ 59																				1	
58/ 57																				1	
56/ 55																					1
54/ 53																					1
TOTAL	.8	39.0	29.9	13.8	6.3	1.7	1.1											374	372	374	374

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2755508	31902	85.3	9.587	374			91.3	72.2	16.4		93
Dry Bulb	2156869	28397	75.7	4.103	375			84.0	52.5	.7		93
Wet Bulb	1962932	27048	72.3	4.269	374			74.8	42.3			93
Dew Point	1885062	26486	70.8	5.012	374							

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

[illegible] PROCESSING [illegible]
SAT ETAC
TH[illegible] EAT ER SERVICE/MAC

[illegible] CAIRO/CAIRO [illegible] 1965 5
STATION NAME YEARS

[illegible] 0200-1200

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Point
74/ 73			.3	.1																2		
72/ 71	.2	.6	1.4	.2	.3													12	12	7		6
70/ 69		.2	.3	.3	.3													7	13	4		9
68/ 67	1.7	7.9	1.7															24	32	30		17
66/ 65	.3	6.7	2.5															34	34	32		24
64/ 63	.6	7.9	2.5	.6														41	41	39		25
62/ 61	1.1	12.2	1.1	.2														55	55	46		45
60/ 59	1.7	10.9	1.4															47	47	55		57
58/ 57	1.9	7.2	2.5	.3														43	43	50		55
56/ 55	.6	9.4	1.9															24	24	31		27
54/ 53	.6	2.5	.8															14	14	23		35
52/ 51	.3	2.5	.6															12	12	15		13
50/ 49	.6	2.2																11	11	13		17
48/ 47	.3	2.2																12	12	14		13
46/ 45	.3	.3																2	2	3		14
44/ 43																				1		1
TOTAL	11.4	86.1	16.9	1.1	.6													360		360		360

Element (X)	Σ_X^2	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2969877	32621	90.6	6.236	360							
Dry Bulb	1948785	21937	60.9	5.789	360			16.5	.5			9[illegible]
Wet Bulb	1274073	21321	59.2	5.619	360			9.3				9[illegible]
Dew Point	1228861	20929	58.1	5.813	360			5.8				9[illegible]

USAFETAC FORM 0-26-5 (OL A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

ATA PROCESSING BRANCH
SAF ETAC
IR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

[illegible] CAPE PEQUOT GAP, CONN/CONNECTICUT [illegible]=64,[illegible]63-65,70 [illegible]
STATION NAME YEARS MONTH

[illegible] HOURS [illegible]

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
80/ 79			.2															1	1		
78/ 77			.2															1	1		
76/ 75		.2	.2															4	4	1	
74/ 73	.2	.8	.2															7	7	4	
72/ 71	.5	1.2	.7	.2														11	11	11	
70/ 69	.5	1.2	1.3	.2	.2													25	25	12	1
68/ 67	1.3	4.1	1.8	.2		.2												45	45	21	1
66/ 65	2.5	4.7	2.0		.2													56	56	42	4
64/ 63	2.5	6.4	1.8															64	64	57	6
62/ 61	3.0	8.1	1.4	.2														75	75	72	4
60/ 59	2.7	7.9	2.2															77	77	81	3
58/ 57	2.5	7.1	.7	.2														70	70	84	6
56/ 55	1.5	4.5	1.6															42	42	61	5
54/ 53	2.2	3.5	1.3															40	40	41	5
52/ 51	1.3	3.[illegible]	.2															37	37	35	3
50/ 49	.6	2.9																22	22	27	3
48/ 47	1.7	2.2																23	23	20	3
46/ 45	.7	1.0																10	10	11	1
44/ 43	.3	.3																5	5	7	
42/ 41		.2																1	1	2	
40/ 39																					1
TOTAL	29.3	57.3	19.2	1.2	.3	.2												595		595	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5146087	55209	92.8	6.269	595							
Dry Bulb	2156383	35587	59.8	6.632	595			13.9	1.7			9
Wet Bulb	2059070	34796	58.5	6.412	595			7.4	.8			5
Dew Point	2002732	33802	57.7	6.514	595			5.9	.5			2

USAFETAC FORM 0-26-5 (OL-A) JUL 66 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSED BY ENVIRONMENTAL
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — STATION NAME — 51-52, 54-71 — YEARS — MONTH

WORLD-WIDE

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	Wet Bulb	Dew Point
80/ 79			.1	.1																	
78/ 77		.2	.3	.1																	
76/ 75			.1																		
74/ 73	.2	.3	.2			.1												1	16	2	1
72/ 71	.5	1.7	.3	.2	.1													3	27	1	
70/ 69	1.2	2.5	1.5	.2	.1	.1												11	71	2	
68/ 67	1.1	4.5	2.1	.5	.1	.1												11	113	3	
66/ 65	1.4	4.9	1.2	.2	.1													11	119	2	
64/ 63	1.2	6.2	2.1	.4	.1													19	154	133	11
62/ 61	2.2	7.2	1.1	.2														17	173	137	14
60/ 59	2.2	6.2	1.3	.2														14	157	109	11
58/ 57	3.3	5.2	1.1	.2	.1													14	146	153	17
56/ 55	3.1	4.6	.8	.1														13	95	135	17
54/ 53	1.2	6.2	.9															9	63	93	13
52/ 51	1.3	3.2	.4															5	45	68	9
50/ 49	1.6	6.2																8	58	76	6
48/ 47	1.1	1.1																2	36	46	6
46/ 45	1.2	.9																10	19	30	3
44/ 43	.2	.2																3	5	7	1
42/ 41	.9	.2																11	11	12	1
40/ 39	.1																	2	2	2	
TOTAL	23.1	50.2	13.2	2.1	.7	.2												1361	1361	1361	136

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	11548626	124932	91.8	7.698	1361							
Dry Bulb	4997801	81953	60.2	6.805	1361			16.7	1.9			9
Wet Bulb	4732792	79940	58.7	6.498	1361			10.1	.9			5
Dew Point	4596144	78976	57.7	6.622	1361			8.1	.8			4

FORM 0-26-5 (OL A) JUL 64 — USAFETAC

2

PSYCHROMETRIC SUMMARY

[illegible] PSYCHROMETRIC SUMMARY [illegible]

[illegible] STATION NAME [illegible] 5-Year, 1961-71 YEARS [illegible]

DRY BULB TEMP F	WET BULB TEMPERATURE DEPRESSION F																											TOTAL D.B	TOTAL Wet B.	TOTAL Dew P.
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31													
86/ 85										.1																				
84/ 83					.1																									
82/ 81			.1	.1	.1	.1		.1																						
80/ 79			.1	.1	.1	.1	.1	.1																						
78/ 77		.1	.1	.1	.1	.1	.1	.1		.1																				
76/ 75	.1	.1	.1	1.1	1.1	.1	.1	.1																						
74/ 73	.1	.3	1.1	1.1	1.1	1.1	.1	.1																						
72/ 71	.2	1.2	2.2	1.2	2.1	.1	.1	.1																						
70/ 69	.2	1.2	2.1	1.1	2.1	1.1	.1	.1																						
68/ 67	.2	2.1	4.2	2.2	1.1	.1	.1																							
66/ 65	.3	3.3	3.3	2.1	.1	.1	.1																							
64/ 63	1.2	3.1	3.1	1.3	.1	.1	.1																							
62/ 61	1.3	3.0	2.0	.1	.1	.1																								
60/ 59	.7	3.3	1.0	.3	.2	.1	.1																							
58/ 57	.3	1.3	1.1	.1	.1	.1																								
56/ 55	.1	1.3	1.2	.2																										
54/ 53	.1	1.1	.1	.1																										
52/ 51	.4	1.3	.2																											
50/ 49	.1	.1																												
48/ 47	.1	.2																												
46/ 45	.1	.1																												
44/ 43	.1																													
42/ 41																														
40/ 39																														
38/ 37																														
TOTAL	5.0	27.4	29.0	13.9	13.2	5.0	2.3	1.1		.1																		135.		135.
																												1353		1353

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Re. Hum.	8701772	1072508	79.0	12.982	1358							
Dry Bulb	5983745	89685	66.0	6.692	1358			45.7	14.5	.9		90
Wet Bulb	5211390	83770	61.7	5.698	1358			17.2	1.7			90
Dew Point	4770468	80040	58.9	6.240	1358			9.2	.8			90

USAFETAC FORM 0-26-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — STATION

CAPE FEAR AAP [illegible]/CHERRY — STATION NAME

61-71 — YEARS

— MONTH

1200-1400 — HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
88/ 87						.2													2		
86/ 85					.2	.3	.4	.4	.2	.1	.1							2	2		
84/ 83				.2	.1	.7	.7	.4	.7	.2								4	4		
82/ 81				.2	.2	1.4	1.9	1.2	.6	.6								8	8		
80/ 79			.2	.5	.5	2.3	2.4	2.3	1.0	.9	.1							12	12		
78/ 77		.2	.3	.2	2.3	2.6	3.5	2.3	.7	.3	.1							14	14	1	1
76/ 75	.1	.3	.5	1.5	1.7	3.1	2.4	1.3	1.1	.2								14	14	1	
74/ 73	.2	.2	.2	1.6	3.0	2.3	2.5	1.5	.6									17	17	45	1
72/ 71	.5	.4	1.5	1.7	2.6	1.4	1.3	.7	.4									14	14	78	2
70/ 69	.2	1.1	1.5	2.1	2.3	1.5	1.0	.5	.2									14	14	145	4
68/ 67	.2	1.1	1.1	1.2	1.5	1.1	1.4	.2										10	10	202	50
66/ 65	.5	.7	.8	.5	.8	.8	.5	.1										5	5	227	120
64/ 63	.3	.6	.5	.8	.5	.3	.1											3	3	162	134
62/ 61	.4	.5	.5	.3	.1	.1												2	2	144	172
60/ 59	.1	.2	.3	.1	.3	.1	.2											2	2	116	147
58/ 57		.3	.4	.2																77	145
56/ 55		.3																		44	113
54/ 53			.1																	17	86
52/ 51																				5	73
50/ 49																				2	49
48/ 47																				2	44
46/ 45																					22
44/ 43																					13
42/ 41																					6
40/ 39																					3
36/ 35																					1
34/ 33																					1
TOTAL	2.3	5.8	8.8	11.6	17.1	17.7	18.3	11.3	5.4	1.4	.2							1330	1330		1330
																		1330		1330	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.
Rel. Hum.	5610605	84029	63.2	15.066	1330
Dry Bulb	7222190	97692	73.5	5.912	1330
Wet Bulb	5603700	86070	64.7	5.039	1330
Dew Point	4757957	79033	59.4	6.806	1330

Mean No. of Hours with Temperature	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.			79.0	52.6	13.7		90
Dry Bulb			33.7	4.9			90
Wet Bulb			12.9	1.9			90
Dew Point							

FORM 0-26-5 (OL A) JUL 64 USAFETAC REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — CAPE PAGE AAF KOREA/CHUCHO — 21-54,56,61-71 — 5 — 1 — 1500-1700
STATION — STATION NAME — YEARS — MONTH — HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
90/ 89							.4											6			
88/ 87							.1	.3		.5	.4	.2						15	15		
86/ 85				.1	.2	.3	.3	1.3	.9	.6	.1							49	49		
84/ 83				.1	.2	.8	1.3	2.3	2.5	.5	.3							100	100		
82/ 81			.1	.3	.7	1.2	2.2	4.5	1.8	.7	.1							140	139		
80/ 79			.5	.4	.7	1.8	2.2	2.5	3.4	.8	.5	.1						183	183	1	
78/ 77		.2	.5	.6	1.5	1.9	2.9	2.9	1.6	.4	.3	.1						173	173	10	
76/ 75		.3	.2	.9	1.3	1.9	3.3	2.0	1.2	.6								165	165	25	12
74/ 73		.3	.6	.3	.7	1.0	1.5	1.9	1.3	.3								111	111	53	15
72/ 71	.1	.4	1.5	.8	1.2	1.2	1.3	1.5	.5	.2								116	116	90	37
70/ 69		1.2	.8	1.2	.5	1.2	1.2	1.2	.2	.2								100	100	160	46
68/ 67	.1	1.5	.4	.5	.4	.7	.6	.4										59	59	217	70
66/ 65		.6	.3	.3	.5	.5												33	33	185	116
64/ 63	.5	.6	.4	.2	.2	.2												22	24	193	111
62/ 61	.2	.6	.1	.2		.2												16	16	113	125
60/ 59		.3			.2	.1	.1											5	6	102	166
58/ 57	.2	.2																4	4	80	141
56/ 55		.2																3	3	44	115
54/ 53																				13	99
52/ 51																				4	67
50/ 49																				1	57
48/ 47																				1	42
46/ 45																					39
44/ 43																					19
42/ 41																					15
40/ 39																					5
38/ 37																					4
36/ 35																					2
TOTAL	1.0	6.9	6.1	6.1	8.1	13.3	17.3	20.7	14.0	4.9	1.4	.3							1297		1297
																	1297			1297	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4036883	74539	57.5	16.506	1297							
Dry Bulb	7512706	98400	75.9	6.045	1297			83.5	64.3	27.3		90
Wet Bulb	5549451	84585	65.2	5.059	1297			38.6	6.2			90
Dew Point	4546078	76190	58.7	7.372	1297			12.6	2.2			90

FORM 0-26 5 (O. A) JUL 64 — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 STATION | CAMP PAGE AIR FORCE/CHUNCHON STATION NAME | 51-54, 56, 61-62, 64-67, 69 YEARS | SEP MONTH

1800-2000 HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
86/ 85								.2										1	1		
84/ 83				.1		.4	.7	.9	.6	.2								1	12		
82/ 81			.6	.4	.5	.9	1.6	.7	.3									7	27		
80/ 79			.6		.7	1.2	2.0	1.1	.2	.2								25	32		
78/ 77		.6	.7	1.1	.9	1.5	1.9	1.6	.4	.2								47	47	4	
76/ 75		.4	1.2	1.4	1.6	2.5	2.3	1.2	.2									62	62	3	
74/ 73	.2	.4	1.5	1.1	2.1	3.0	1.7	.3	.7									73	82	15	
72/ 71	.2	.9	1.9	2.5	2.0	2.5	1.5	.4	.2									73	73	36	11
70/ 69		1.1	1.9	3.3	2.5	1.2	.7	.4										63	63	51	2
68/ 67	.2	1.2	2.5	1.9	1.0	.7	1.1	.2										56	56	72	34
66/ 65	.2	2.3	1.2	2.5	1.6	1.1	.4											52	52	82	44
64/ 63	.2		.9	1.4	.7	.5												23	23	99	63
62/ 61	.5	1.6	1.1	.7	.4													25	25	75	50
60/ 59	.4	.5	.5	.2	.5													12	12	56	81
58/ 57			.7	.2														3	3	31	69
56/ 55		.2	.5															2	2	24	54
54/ 53		.3																1	1	16	41
52/ 51																				6	31
50/ 49																					19
48/ 47																					12
46/ 45																					14
44/ 43																					4
42/ 41																					
TOTAL	2.1	9.9	15.1	15.9	10.0	12.7	15.1	6.9	2.3	.5								567	568		568

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2737297	38537	67.8	14.710	568							
Dry Bulb	2917191	40555	71.4	6.169	568			70.2	39.8	9.2		9[illegible]
Wet Bulb	2389984	36344	64.0	5.053	568			28.4	3.2			9[illegible]
Dew Point	2038352	33834	59.6	6.364	568			12.7	1.9			3[illegible]

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — CAMP PAGE AAF (CHUNCHON) — 51-54 — YEARS — 04 — MONTH

1 — 2100-2200 HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
76/ 75				.5	.3														1		
74/ 73		.0	2.8	1.1	.2													4	1		
72/ 71	.3	.6	1.7	1.1	1.4													4	5	3	
70/ 69		3.0	3.3	1.1	.3	.0												11	11	12	
68/ 67		3.9	4.8	2.0	.8	.3												19	14	29	22
66/ 65	.3	4.2	2.0	3.7	.3													20	49	37	23
64/ 63	.6	6.4	7.0	2.0	.3													37	56	49	41
62/ 61	.3	5.4	4.2	.4														43	44	37	31
60/ 59	.3	3.9	3.9	1.1		.3												43	35	39	46
58/ 57	.8	1.7	.8	.3														13	13	39	52
56/ 55	.3	2.2	.6	.3														14	14	24	33
54/ 53		2.0	1.7															13	13	16	20
52/ 51	.3	1.4																6	6	12	21
50/ 49	.2	.8																4	4	11	11
48/ 47																				2	
46/ 45																					
44/ 43																					
TOTAL	3.9	37.5	30.4	12.1	4.9	1.1												357	357	357	357

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2555368	30048	84.2	8.593	357							
Dry Bulb	1479318	22868	64.1	5.427	357			30.5	5.3			36
Wet Bulb	1333960	21748	60.9	5.055	357			13.1				90
Dew Point	1254071	21069	59.0	5.668	357			8.1				90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

4327/1 STATION — CAMP PAGE AAF AIRFIELD/CHILCHOTIN STATION NAME — 51-54 YEARS — 01 MONTH

PART I 0000-2200 HOURS (L.S.T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
64/ 63		.3	.3															2	2		
62/ 61		1.2	.3		.3													4	6	1	
60/ 59	.9	.6	.9	.9														11	11	2	2
58/ 57		3.0	1.2															14	14	5	3
56/ 55	1.2	5.7	1.5															28	28	13	13
54/ 53	.3	8.7	.9	.3														31	34	33	20
52/ 51	.9	6.3		.3														35	35	38	22
50/ 49	.4	5.7	2.9	1.2														34	34	41	27
48/ 47	.6	6.1	1.2	.6														34	35	30	23
46/ 45	2.1	2.6	.3															45	46	46	33
44/ 43	2.4	6.0	.3															29	29	39	47
42/ 41	1.5	7.2	.3															30	30	35	29
40/ 39	1.3	4.2	.6															22	22	27	36
38/ 37	1.2	2.1	.3															12	12	11	24
36/ 35	.3	2.7																10	10	12	6
34/ 33		.3																1	1	0	3
32/ 31																				1	1
30/ 29																					1
TOTAL	14.2	72.0	16.2	3.3	.3														332		332
																		332		332	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2070413	29687	89.4	6.918	332							
Dry Bulb	779898	15946	48.0	6.506	332							9
Wet Bulb	730903	15441	46.5	6.208	332		.3					9
Dew Point	686486	14962	45.0	6.482	332		2.8					9

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

4327 — STATION
CAPE RACE AAF NEWFOUNDLAND/CANADA — STATION NAME
51-54, 56-61, 63-66, 68-70 — YEARS
1 — MONTH
0300-0500 — HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	TOTAL W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
68/ 67				.2														1	1			
66/ 65			.2	.3														2	2			
64/ 63		.2	.3															5	5	3	3	2
62/ 61	.2	.3		.5		.5												11	11	11	11	8
60/ 59	1.3	.5	1.0	.6		.2												24	24	17	17	11
58/ 57		2.4	.6	.5	.3													25	25	9	9	7
56/ 55	.5	3.4	1.2	.3	.5													31	31	30	30	15
54/ 53	1.5	4.2	1.1															46	46	39	39	36
52/ 51	1.3	4.1	1.2															42	42	59	59	45
50/ 49	3.2	5.3	.3															57	57	63	63	52
48/ 47	2.4	5.3	.3	.2	.2													51	51	54	54	51
46/ 45	2.4	2.3	.2	.2	.2													54	54	53	53	66
44/ 43	5.0	5.0	.3	.3														71	71	71	71	60
42/ 41	3.1	3.7			.2													44	44	54	54	69
40/ 39	3.4	0.5	.3															43	43	54	54	53
38/ 37	2.4	2.3	.3	.2														26	26	50	50	57
36/ 35	1.3	.8																16	16	25	25	25
34/ 33	1.0	1.0																16	16	16	16	24
32/ 31	.3	.8																8	8	13	13	12
30/ 29	.2	.5																5	5	5	5	13
28/ 27																				1	1	5
26/ 25																						2
24/ 23																						1
18/ 17																						1
TOTAL	31.1	56.9	7.1	3.4	1.3	.6												617	617	617	617	617

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5102420	56154	91.0	9.167	617							
Dry Bulb	1380480	28816	46.7	7.503	617		2.0	.2				93
Wet Bulb	1303793	28027	45.4	7.057	617		2.9					93
Dew Point	1233345	27211	44.1	7.351	617		5.3					93

USAFETAC FORM 0-26-5 (OL-A) REVISED PREVIOUS EDITIONS OBSOLETE AND ARE NOT TO BE USED

DATA PROCESSING BRANCH
USAF ETAC
SCN EAT FI SERVICE/ MC

PSYCHROMETRIC SUMMARY

4327 1 STATION
CAPE RADE AAF NUMBER/CLIMATE STATION NAME
51-56,58-60-71 YEARS
7 MONTH
FROM 1 HOURS (L.S.T.) 0000-2300

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
72/ 71					.1													1	1		
70/ 69					.1													1	1		
68/ 67				.1	.1														2		
66/ 65				.1		.1													3		
64/ 63		.1	.3	.1														1	1	2	
62/ 61	.1	.7	.4	.2		.1												2	2	7	6
60/ 59	.6	1.5	.6	.2	.2													4	46	32	29
58/ 57	.1	2.5	.5	.4	.1	.1												51	51	35	23
56/ 55	1.1	3.9	.6	.4	.1													6	6	69	60
54/ 53	1.7	4.0	.8	.2														95	95	88	85
52/ 51	2.5	4.0	.8	.3														110	110	118	97
50/ 49	3.2	5.6	.6	.1														135	135	118	117
48/ 47	2.9	7.1	.5	.3														153	153	157	143
46/ 45	1.8	4.2		.1	.1													125	125	146	156
44/ 43	4.5	4.6	.1	.1	.1													137	142	144	140
42/ 41	3.5	3.8	.4	.1														116	111	117	132
40/ 39	3.3	3.9	.5		.1													117	117	110	100
38/ 37	2.9	2.3	.3	.2	.1													82	85	105	95
36/ 35	1.1	2.6	.2	.1														57	60	58	73
34/ 33	1.4	1.5	.1															44	45	52	64
32/ 31	.7	.9																23	23	33	41
30/ 29	.6	.4																13	13	21	26
28/ 27	.1	.1																2	2	5	10
26/ 25																					2
24/ 23																					1
22/ 21																					3
20/ 19																					1
18/ 17																					2
TOTAL	34.4	54.6	6.6	3.0	1.1	.2												1417	1432	1417	1417

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	12092366	130320	92.0	8.700	1417							
Dry Bulb	3149305	66295	46.3	7.484	1432		2.5	.3				9
Wet Bulb	2967208	64042	45.2	7.170	1417		3.9					93
Dew Point	2827081	62397	44.0	7.691	1417		6.5					91

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 CAMP HAGE AAF KOREA/CHUNCHON 51-54, 57-60-71 OCT
STATION STATION NAME YEARS MONTH

HOUR 1 0900-1200
HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
76/ 75							.1											1	1		
74/ 73						.1												2	2		
72/ 71				.1	.1	.1	.1											3	3		
70/ 69				.2	.3	.4	.1											14	14		
68/ 67			.1	.4	.6	.4	.1	.1		.1								24	24	1	
66/ 65			.6	.7	.7	.1	.2	.1										35	35	1	1
64/ 63		.7	1.2	.8	1.0	.5	.4											72	72	12	
62/ 61		1.0	1.1	1.7	1.2	.4	.1											77	77	37	1
60/ 59		1.3	2.1	2.3	1.2	.6	.1											107	104	56	2
58/ 57	.1	2.2	2.9	1.5	.9	.3	.1	.1										106	106	81	5
56/ 55	.4	4.1	2.5	1.7	.7	.3												130	128	116	6
54/ 53	1.2	3.3	3.3	1.5	.4	.1	.1											142	142	176	11
52/ 51	.2	4.1	3.3	1.3	.4	.1												135	136	150	17
50/ 49	.9	4.9	4.9	1.3	.9	.3												126	126	164	14
48/ 47	.6	4.3	2.2	.5	.1	.2	.1											115	115	142	16
46/ 45	1.3	4.1	1.4	.2	.3	.1												110	111	139	16
44/ 43	1.1	2.3	.7	.2		.1												72	71	113	13
42/ 41	.5	2.4	.9	.4		.1												64	64	88	11
40/ 39	1.1	1.2	.3		.1													39	40	65	11
38/ 37	.7	.1	.1	.1														23	22	46	6
36/ 35	.3	.0	.1															11	18	20	3
34/ 33	.1	.1																3	3	11	3
32/ 31																				R	1
30/ 29																					1
28/ 27																					
26/ 25																					
24/ 23																					1
22/ 21																					1
20/ 19																					4
18/ 17																					1
16/ 15																					
TOTAL	8.7	37.0	29.7	19.5	8.6	4.3	1.3	.2		.1									1432		1426
																		1426		1426	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	93459976	113598	79.7	14.425	1426							
Dry Bulb	40400447	79272	52.6	7.663	1432			3.0	.2			93
Wet Bulb	35091359	70119	49.2	6.556	1426		.5	.1				93
Dew Point	30459126	63628	46.0	7.281	1426		3.9					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 CAPE PAGE AAP MISSOURI/CONSOLID. 21-54,57,60-71 OCT
STATION STATION NAME YEARS MONTH

SHEET 1 1200-1400
HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
82/ 81										.1								1	1		
80/ 79								.1	.2									2	2		
78/ 77							.4	.3	.3			.1						1	10		
76/ 75					.1	.2	.3	.7	.2	.1	.1							32	32		
74/ 73						.4	1.2	.6	.1									39	39		
72/ 71				.1	.7	1.7	1.6	.7	.3	.2	.1	.1						84	84		
70/ 69			.1	.1	1.0	1.6	1.7	1.0	.7	.1								122	122		
68/ 67			.3	.7	2.3	2.4	2.3	1.7	.5	.3								147	147	5	
66/ 65		.1	.6	.9	1.9	2.9	3.2	1.4	.2									156	156	19	2
64/ 63			.5	.9	2.3	3.3	1.3	.9	.3	.1								147	147	55	1
62/ 61		.4	.9	2.4	2.8	2.7	1.5	.6	.1									138	138	104	17
60/ 59	.1	.6	.9	1.9	1.9	2.1	.7	.3	.2									120	120	111	32
58/ 57		.6	1.2	1.2	1.9	1.4	1.4	.2	.1									114	114	147	70
56/ 55		.5	.8	1.2	1.2	.9	.9	.4										82	83	202	83
54/ 53		1.8	1.1	.9	.8	.6	.5	.1										75	75	226	103
52/ 51		.4	1.1	.7	.9	.7	.1											53	53	147	136
50/ 49		.2	.6	.2		.2	.1											20	20	139	150
48/ 47	.1	.4	.6	.1	.2	.2	.2											26	26	65	139
46/ 45		.4	.1	.1														9	9	70	137
44/ 43		.1			.1													3	3	42	125
42/ 41					.1													2	2	22	95
40/ 39					.1													1	1	8	92
38/ 37																				6	45
36/ 35																				1	37
34/ 33																				3	39
32/ 31																					27
30/ 29																					14
28/ 27																					14
26/ 25																					9
24/ 23																					9
22/ 21																					7
20/ 19																					4
18/ 17																					3

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93271 (STATION) CAMP PAGE AAF (DEA/CH) CHINA (STATION NAME) 51-52,56-71 (YEARS) (MONTH)

(HOURS) 1200-1400

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
TOTAL	.1	5.2	5.8	11.0	16.0	22.3	18.0	13.1	5.4	.9	.2	.1						1396	1396

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4524246	79300	56.8	15.136	1396							
Dry Bulb	5550420	87554	62.6	6.930	1398			28.6	6.1	.1		93
Wet Bulb	4093811	72177	53.9	5.705	1396			.3				93
Dew Point	3073890	64522	46.2	8.109	1396		5.8					93

USAFETAC FORM AX 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

63271 STATION | CAMP PAUL ANF ALASKA/CHICHI-JIMA STATION NAME | 21-YEARS | YEARS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	+31	TOTAL D.B	TOTAL W.B	TOTAL Dry Bulb	TOTAL Wet Bulb Dew Point
82/ 81							.1	.1	.1	.4	.1	.1									
80/ 79							.1	.2	.4	.2	.1	.1									
78/ 77						.1	.4	1.0	.4	.4	.3	.1									
76/ 75						.2	1.1	1.2	1.4	.1	.1										
74/ 73						.4	1.0	.7	.4	.2	.2										
72/ 71				.1	.1	.1	2.1	3.2	2.0	.7											
70/ 69			.1	.0	.9	1.9	2.1	3.7	2.0	1.1											
68/ 67			.4	.3	1.2	1.2	1.2	2.2	1.6	.3	.1										
66/ 65		.2	.2	.3	1.3	2.0	1.9	2.7	1.7	.1	.1										
64/ 63		.3	.1	.7	.8	2.4	2.3	2.2	1.1	.1											
62/ 61		.2	.0	.0	1.2	2.1	1.1	1.1	.4	.1											
60/ 59		.4	.4	1.0	1.0	1.2	1.1	.4	.2												
58/ 57		.1	.5	.2	1.5	.9	1.5	.4	.2												
56/ 55	.1	.3	.2	.3	.0	.5	.7	.1	.1												
54/ 53	.1	.4		.1	.3	.2	.2														
52/ 51	.1	.3	.2	.2	.1	.2	.1														
50/ 49		.1		.1	.1	.2	.1														
48/ 47		.1			.1	.1	.1														
46/ 45						.1															
44/ 43		.1																			
42/ 41		.1			.1																
40/ 39					.1																
38/ 37																					
36/ 35																					
34/ 33																					
32/ 31																					
30/ 29																					
28/ 27																					
26/ 25																					
24/ 23																					
22/ 21																					
20/ 19																					
18/ 17																					
16/ 15																					

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[illegible] CAPE PAGE AAF [illegible] 21-54,55,60-71
STATION NAME YEARS MONTH

1300-1700 HOURS (LST)

Temp °F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew P.
147	13																		
[illegible]	[illegible]																	135	133

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3424365	64943	48,1	14,866	1349			40,5	15,5	1,4		93
Dry Bulb	5969411	89309	66,2	6,735	1350			,7				
Wet Bulb	4096290	73952	54,8	5,399	1349		,1					93
Dew Point	2822367	60567	44,9	8,743	1349		7,9					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAMP PAUL ANP, ARK/CAMDEN
STATION NUMBER STATION NAME

01-59,73-80

YEARS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb	Dew Pt.
76/ 75					.2	.2	.3	.3	.3													
74/ 73						.5	.4	.4	.2	.2												
72/ 71			.2		.3	1.0	1.3	.3		.3								3	3	22		
70/ 69			.2	.8	2.0	1.6	1.4	.7	.3									33	33	44	2	
68/ 67		.6	.9	1.3	1.3	1.5	1.7	.7	.3									43	43	44	2	
66/ 65		.3	.5	1.6	1.7	2.0	.2	.7	.3									45	45	43	6	
64/ 63		.3	1.2	1.3	1.4	2.5	1.5	.7	.5									53	53	52	3	
62/ 61		.3	2.0	2.2	2.4	2.3	1.2	1.0										72	72	57	32	
60/ 59	.2	.5	1.2	2.7	3.2	.8	1.											57	57	61	20	
58/ 57		.3	2.0	3.5	2.3	1.3	.2											60	60	55	31	
56/ 55	.7	1.5	2.0	2.3	2.0	.2	.2	.3										53	53	79	41	
54/ 53	.3	1.2	1.5	2.4	1.3	.7	.3											46	46	73	45	
52/ 51	.2	.7	1.3	3.0	.2	.3	.3											59	59	61	61	
50/ 49		1.3	.5	.5	.7	.2												21	21	66	54	
48/ 47		.7	.7	.3	.5		.2											17	17	53	62	
46/ 45				.2	.2													2	2	39	74	
44/ 43			.2															1	1	14	43	
42/ 41																				11	42	
40/ 39																				10	33	
38/ 37				.2														1	1	1	30	
36/ 35																					7	
34/ 33																					13	
32/ 31																				1	7	
30/ 29																					16	
28/ 27																					4	
24/ 23																					2	
22/ 21																					1	
20/ 19																					2	
16/ 15																					1	
TOTAL	1.3	7.8	13.0	22.9	21.1	15.9	10.3	4.3	2.0	.7								603				603
																		603		603		

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2541575	38037	63.1	15.370	603							
Dry Bulb	2226690	36418	60.4	6.726	603			19.3	2.0			93
Wet Bulb	1730437	32113	53.3	5.771	603		.2	.3				93
Dew Point	1470900	28348	47.0	7.967	603		4.6					93

FORM 0-26 5 (OL A) REVISED PREVIOUS EDITIONS OBSOLETE
USAFETAC

2

PSYCHROMETRIC SUMMARY

STATION NAME

YEARS

MONTH

HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Po
68/ 67				•														1		
66/ 65			• 3	•	•															
64/ 63			• 3	• 6	•	•														
62/ 61		1 • 2	1 • 2	• 3		• 3												32	12	3	3
60/ 59	• 3	1 • 3	2 • 0	1 • 0	• 3													2	22	12	7
58/ 57	• 3	3 • 2	3 • 3	2 • 1		• 3												34	33	15	11
56/ 55		4 • 5	2 • 4	• 3														25	32	33	31
54/ 53	• 6	5 • 0	2 • 2	• 3	• 3													23	40	22	14
52/ 51		5 • 2	4 • 7	1 • 0														22	34	37	30
50/ 49	• 3	7 • 1	4 • 5	• 3														31	41	44	2
48/ 47	• 3	5 • 9	1 • 8	1 • 2														1	31	45	41
46/ 45	• 6	6 • 2	1 • 5	• 3	• 3													32	32	36	43
44/ 43	• 3	5 • 0	• 3	• 6														21	21	23	27
42/ 41		2 • 7	• 3															12	12	21	25
40/ 39		2 • 1	• 6															3	3	13	7
38/ 37		• 3	• 3															2	2	12	1
36/ 35																				2	
34/ 33																					1
32/ 31																					4
30/ 29																					2
28/ 27																					1
TOTAL	2 • 7	61 • 7	30 • 9	11 • 7	2 • 4	• 6												337	337	337	337

TOTAL D.B. W.B. = 337

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2328517	27833	82.6	9.414	337							9
Dry Bulb	916168	17446	51.8	6.224	337			• 3				9
Wet Bulb	823200	16538	49.1	5.879	337							9
Dew Point	743063	15681	46.5	6.457	337		2.5					9

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAMP PAGE AAF KOREA/CHUNCHEON 21-54
STATION STATION NAME YEARS

[illegible] 2000-2200
HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
56/ 55			.4	.4		.4															
52/ 51		1.2		1.1															2		
50/ 49		.4	.7	.7		.4															
48/ 47	.7	1.9	.4		.4																
46/ 45		3.0	.4	.7														11	11	10	
44/ 43	1.2	3.7	4.1																		
42/ 41	4.1	8.2	.7	.4																	
40/ 39	3.0	7.1	.4	.7																	
38/ 37	1.1	8.5	.4	.7																	
36/ 35	3.0	4.1	1.1																		
34/ 33	1.5	2.6	1.1																		
32/ 31	.4	3.4	.7																		
30/ 29	1.1	3.4	2.2																		
28/ 27	.7	4.9	2.6																		
26/ 25	.4	3.0	.4																		
24/ 23		1.5	.4																		
22/ 21		1.5																			
20/ 19																					
18/ 17		.4																			
16/ 15																					
14/ 13		.4																			
12/ 11																					
10/ 9																					
8/ 7																					
TOTAL	17.0	60.3	19.1	4.9	.4	.7											267		270		267

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1933841	22479	84.2	12.462	267							
Dry Bulb	388774	10044	37.2	7.501	270		24.7					90
Wet Bulb	349262	9456	35.4	7.427	267		28.7					90
Dew Point	304436	8096	32.6	8.937	267		36.1					90

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

9327 | CAPE PAGE A.F. KORE A/(OR (PAP) | 51-54,60-61,63-66 - 7
STATION | STATION NAME | YEARS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B	TOTAL W.B. Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Pt.
56/ 55		.2																1	1		
54/ 53		.5	.2															3	4	2	1
52/ 51		1.5	.7	.2														4	13	4	1
50/ 49		2.3	1.2	.7														15	22	14	5
48/ 47	.3	1.0	.5	.3	.2													20	21	21	1
46/ 45	1.0	3.6	.5	.2														34	34	32	24
44/ 43	1.2	3.0	2.3	.2														44	44	36	33
42/ 41	2.1	4.1	.8	.3														45	45	34	34
40/ 39	2.1	3.5	.6	.2														44	44	59	49
38/ 37	3.1	5.4	.2															53	54	49	44
36/ 35	4.3	5.4	.5	.2	.2													64	63	71	62
34/ 33	3.3	6.3	.2															54	60	58	67
32/ 31	2.1	5.3	.6	.2														54	54	51	51
30/ 29	1.0	4.4	.2	.2														51	49	49	46
28/ 27	1.2	3.8	.2	.2														42	36	35	44
26/ 25	.8	3.6	.5															32	36	29	25
24/ 23	.3	1.6	.7															16	16	25	35
22/ 21		1.0	.3	.3														12	10	11	21
20/ 19		.3																3	3	9	15
18/ 17	.2	.7																5	5	6	7
16/ 15																				5	7
14/ 13	.2	.5																4	4	2	4
12/ 11		.2	.2															2	2	2	5
10/ 9	.2																	1	1	3	1
8/ 7																					4
6/ 5																					1
0/ -1																					1
-2/ -3																					2
-6/ -7																					1
TOTAL	24.9	60.5	10.9	2.5	.3														616		607
																		607		607	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4011970	52440	86.4	11.602	607							
Dry Bulb	835798	22030	36.1	8.124	610		29.4					9
Wet Bulb	771352	21090	34.7	7.980	607		33.7					9
Dew Point	685984	19586	32.3	9.440	607	.6	40.8					20

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

9327/A — CAPE RACE AAF (CORRECTED) — 51-54,61-71
STATION NAME — YEARS — MONTH

HOURS — 0000-2300

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew P.
58/ 57		.1																1	1		
56/ 55		.2	.4																		
54/ 53		.3	.5	.1																	
52/ 51	.2	1.4	.9	.1																	
50/ 49	.2	2.3	.5	.4																	
48/ 47	.3	2.7	.7	.2	.0																
46/ 45	.3	2.9	.8	.1																	
44/ 43	1.3	3.9	1.6	.6																	
42/ 41	2.5	3.6	1.5	.3																	
40/ 39	2.8	4.0	.2	.3																	
38/ 37	2.9	4.0	.3	.5	.1																
36/ 35	3.3	3.6	1.1	.4	.4																
34/ 33	3.1	4.1	1.1	.5																	
32/ 31	2.8	4.5	.6	.3																	
30/ 29	2.3	4.3	1.0	.3																	
28/ 27	1.3	3.2	.2	.4																	
26/ 25	1.1	3.3	.5																		
24/ 23	.6	1.9	.4																		
22/ 21	.5	1.1	.2																		
20/ 19		1.3	.2																		
18/ 17	.2	1.3	.3																		
16/ 15	.1	.4	.2																		
14/ 13		.2	.2																		
12/ 11	.2	.2	.1																		
10/ 9	.2																				
8/ 7																					
6/ 5																					
4/ 3																					
2/ 1																					
0/ -1																					
-4/ -5																					
-6/ -7																					
TOTAL	26.3	50.1	12.9	4.4	.3													1273	1291	1273	1273

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	9576440	109176	85.8	12.944	1273							
Dry Bulb	1732716	46002	35.6	6.515	1291		32.6					96
Wet Bulb	1576778	43480	34.2	8.471	1273		38.0					90
Dew Point	1397160	40090	31.5	10.287	1273	.6	46.5					96

USAFETAC FORM 0-26-5 (OL A) JUL 64 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PROCESSED BY AFGWC
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

4323 | CAPE PAGE AAF, IRE/CHICHIJI | 51-54,60-71 | | 0800-1100
STATION NUMBER | STATION NAME | YEARS | MONTH | HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
60/ 59			.1	.1	.2		.1														
58/ 57		.1	.3	.2	.4																
56/ 55		.5	.4	.6	.2	.1	.1														
54/ 53		.6	1.0	.9	.7	.1		.1													
52/ 51	.2	.5	1.7	.6	.6	.1															
50/ 49	.1	2.0	1.5	1.0	.6	.4	.2														
48/ 47	.2	3.1	1.7	1.3	.4	.1															
46/ 45	.3	2.8	2.0	1.6	.2	.2															
44/ 43	1.1	4.2	2.1	.9	.2	.1															
42/ 41	1.9	3.0	2.0	1.3	.3	.1															
40/ 39	2.1	2.9	2.1	1.3	.9	.1															
38/ 37	1.8	2.9	2.4	1.3	.4																
36/ 35	2.0	2.7	2.4	.5	.3																
34/ 33	1.1	3.4	1.1	.9	.2																
32/ 31	.8	2.4	1.5	1.0																	
30/ 29	.6	1.0	1.7	.6	.1																
28/ 27	.6	1.3	.6	.4																	
26/ 25	.3	1.3	.3	.2																	
24/ 23	.1	.6	.2	.1																	
22/ 21	.2	.6	.1																		
20/ 19		.5	.2																		
18/ 17		.4																			
16/ 15			.1																		
14/ 13		.1	.1																		
12/ 11		.1																			
10/ 9																					
8/ 7																					
6/ 5																					
4/ 3																					
2/ 1																					
0/ -1																					
-4/ -5																					
-12/-13																					

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAMP PAGE AAF KUNSAN/CHUNCHON 21-54,62-71 [illegible]
STATION STATION NAME YEARS MONTH

[illegible] 0900-1100
HOURS

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
TOTAL	13.	35.	426.	21	2.	.5	1.1	.3	.1									1272	1272

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7869708	97764	76.9	16.706	1272		16.8					90
Dry Bulb	2142779	51307	40.0	8.355	1282		26.0					90
Wet Bulb	1838792	47284	37.2	7.981	1272	.3	38.0					90
Dew Point	1498083	41663	32.7	10.297	1272							

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

93271 — STATION — CAPE PAGE A.F. SITE/CAPE PAGE — STATION NAME — 51-56, 60-71 — YEARS — MONTH — HOURS 1200-1400

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew P.
68/ 67						.1															
66/ 65					.1	.2	.3											11	11		
64/ 63			.1	.1	.3	.3	.4	.2	.2									24	24		
62/ 61				.1	.7	1.1	.9	.3	.1									44	44		
60/ 59			.1	.2	.9	1.3	.7	.2										66	66	2	
58/ 57		.2	.3	1.1	1.2	1.1	.2	.1	.2									81	81	4	1
56/ 55		.2	.3	1.1	1.3	1.3	1.	.1	.1									9	9	25	
54/ 53		.2	1.1	1.1	1.4	1.4	.7	.3										95	95	87	
52/ 51		.2	1.0	1.2	2.0	1.5	.4	.2										102	102	74	21
50/ 49	.1	2.2	2.2	2.2	1.2	1.0	.7	.1										146	146	89	24
48/ 47	.2	1.5	1.1	1.4	2.2	.5	.1											91	91	113	27
46/ 45	.1	1.2	1.2	1.0	1.0	.2	.2											92	92	134	31
44/ 43	.2	1.0	.9	1.0	1.1	1.1	.5											98	98	131	29
42/ 41	.0	1.2	.6	1.4	1.0	1.2												74	74	119	26
40/ 39	.2	1.0	1.0	1.1	1.5	.2												91	91	96	23
38/ 37	.2	.0	.7	.2	1.1													59	59	95	20
36/ 35	.1	.0	.0	1.0	.7	.1												46	46	77	54
34/ 33		.5	.4	.0	.3													21	21	50	75
32/ 31			.2	.3	.1													16	16	71	47
30/ 29		.2	.5	.3														14	14	41	23
28/ 27			.3	.3	.1													9	9	25	50
26/ 25		.2	.3	.2														8	8	13	50
24/ 23		.1	.2	.2														5	5	19	40
22/ 21		.1																1	1	7	33
20/ 19																				4	44
18/ 17																				2	40
16/ 15																					25
14/ 13																					29
12/ 11																					20
10/ 9																					9
8/ 7																					10
6/ 5																					6
4/ 3																					4
2/ 1																					4

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 66 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

2

43271 STATION | CAPE PAGE AAF [illegible]/CHURCHILL STATION NAME | 51-54,60-71 YEARS | MONTH

[illegible] 1200-1400 HOURS (L.S.T.)

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
-2/ -3																					1
-4/ -5																					2
TOTAL	1,014,413,32[illegible],2[illegible],14,8[illegible]							0,2	3,[illegible]		,5							1247	1247	1247	1247

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4470037	74339	59,6	18,770	1247							
Dry Bulb	2942161	59621	47,8	8,574	1247		3,9	,1				9[illegible]
Wet Bulb	2246988	51952	41,7	7,632	1247		12,7					90
Dew Point	1530085	41463	33,2	11,046	1247	,2	38,3					90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 CAMP PAGE AAF [illegible] 51-54,60-71
STATION STATION NAME YEARS MONTH

HOURS 1100-1700

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
70/ 69							.1												1		
68/ 67						.1	.2		.1										1		
66/ 65					.1	.2	1.4	.4	.3	.1								[illegible]	[illegible]		
64/ 63			.1	.2	.7	1.1	.7	.1	.4	.1								[illegible]	[illegible]		
62/ 61				.3	1.1	.6	1.4	.7	.2									[illegible]	[illegible]		
60/ 59		.2	.5	.9	2.5	2.2	1.0	1.1										101	101	2	
58/ 57		.2	.8	1.3	2.0	2.1	1.3	1.1	.2									115	115	8	1
56/ 55		.2	.1	1.1	1.3	2.5	1.7	1.1	.3									99	99	32	2
54/ 53		.7	1.3	.7	1.0	1.1	.7	1.0										94	94	74	6
52/ 51	.4	.7	1.4	1.2	1.0	1.1	.5	.1										93	96	103	27
50/ 49	.2	1.2	1.1	1.3	1.0	1.3	.7	.1										103	103	123	39
48/ 47	.2	.9	1.1	1.0	1.7	1.1	.9	.1										85	85	118	53
46/ 45		1.1	.5	.7	1.0	1.1	.7											69	69	114	89
44/ 43	.3	.7	.4	1.2	1.0	1.4	.7											77	77	117	75
42/ 41	.4	.6	.4	1.4	.9	.9												59	59	96	86
40/ 39	.2	1.0	.5	1.3	.7	.5	.1											54	54	87	78
38/ 37		.2	.7	.5	.7	.1												28	28	81	89
36/ 35		.0	.4	.9	.7													35	35	72	66
34/ 33	.1	.3	.4	.6	.3													24	24	64	72
32/ 31		.3	.4	.1														19	19	42	53
30/ 29			.3	.5	.1													11	11	29	75
28/ 27		.1		.2														4	4	30	69
26/ 25		.1	.2	.2														5	5	14	56
24/ 23		.1	.1															2	2	6	42
22/ 21			.1															1	1	8	44
20/ 19			.1															1	1	2	40
18/ 17																					27
16/ 15																				1	35
14/ 13																					24
12/ 11																					34
10/ 9																					23
8/ 7																					7
6/ 5																					1
4/ 3																					5

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 STATION | CAMP PAGE AAF KUREA/CHUNCHON STATION NAME | 21-54,65-71 YEARS | MONTH

PART 2 1500-1700 HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
2/ 1																			
0/ -1																			
-2/ -3																			
TOTAL	1.	8.	9.	0	11.	6	1	0.	21.	4	9	18.	2	12.	7	0.	6	1.	0	.2			1223	1223	1223
																		1223		1223	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4025284	66197	54.1	19.024	1223							
Dry Bulb	3195052	61546	50.3	8.947	1223		3.2	.4				90
Wet Bulb	2326359	52475	42.9	7.825	1223		9.7					90
Dew Point	1493382	40292	32.9	11.656	1223	.6	39.7					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 | CALIF PSGL AAF VANDENBERG/CHRISTMA | 51-54,56-66 | 1

STATION | STATION NAME | YEARS | MONTH

HOURS (L.S.T.) 1200-2200

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B.	Dry Bulb	TOTAL Wet Bulb	Dew Point
66/ 65							.2											1	1		
64/ 63						.2	.2		.2									1	1		
60/ 59			.2	.7	.5		.4		.2									11	11		
58/ 57		.4	.6	.6	1.1	1.3	.4											24	23		
56/ 55		.2	.9	2.4	1.1	.7	.2											31	30	3	
54/ 53		.7	1.5	4.4	1.5	.7	.2											43	42	12	2
52/ 51	.4	1.1	2.6	2.1	1.5	1.2	.6											53	52	24	5
50/ 49		2.2	3.2	3.0	1.3	2.2	.6											67	67	47	14
48/ 47	.6	2.4	1.3	2.1	1.7	.6	.2											67	67	53	30
46/ 45		2.2	1.7	2.7	1.1	.7	.4											52	53	60	31
44/ 43	.6	2.2	1.5	1.1	.9	.7												38	38	43	58
42/ 41	.7	.9	1.5	1.3	.6	.6												30	30	62	39
40/ 39	.2	1.1	1.7	2.1	.6	.2												31	31	51	40
38/ 37	.4	.6	1.3	.2	1.5	.2												22	22	32	31
36/ 35	.2	2.1	1.1	1.5	.6	.2												37	36	32	33
34/ 33	.4	.7	1.7	.9														25	24	33	32
32/ 31		.2	1.3	.6	.2													13	12	19	36
30/ 29		.2	.6	1.1														10	10	28	31
28/ 27		.4		.4														4	4	11	27
26/ 25		.4	.2															3	3	12	24
24/ 23			.2															1	1	7	17
22/ 21		.2																1	1	2	11
20/ 19			.4															2	2	2	12
18/ 17		.2																1	1	1	17
16/ 15			.2															1	1	2	6
14/ 13																				1	11
12/ 11																					10
10/ 9																					7
8/ 7																					3
6/ 5																					3
4/ 3																					1
2/ 1																					2
0/ -1																					1
-4/ -5																					2

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

93271 CAPE PAGE AMB [illegible]/CRANE 52-56 [illegible]
STATION NAME YEARS MONTH

1800-2000
HOURS (L.S.T.)

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
TOTAL	5	41	60	223	72	92	14	62	2	[illegible]	[illegible]							535	535

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2425048	34026	64.7	18.603	535		5.9					5
Dry Bulb	1153261	24445	45.7	8.248	535		14.3					9
Wet Bulb	917056	21768	40.7	7.737	535	.8	37.7					2
Dew Point	607281	17923	33.5	11.188	535							

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OBSOLETE

DATA PROCESSING BRANCH
SAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43221 — STATION — FORT PAGE AFB — STATION NAME — 51-56 — YEARS — MONTH

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B.	TOTAL W.B.	Dry Bulb	Wet Bulb	Dew Point
58/ 57				.1																1		
56/ 55						.4														1		
52/ 51		1.1	1.1	.4	.4	1.1														5		
50/ 49		2.2	.4	.1																2		
48/ 47		3.4	1.5	.1	.4	.4														10	11	
46/ 45	1.2	7.1	2.2	.1																20	27	14
44/ 43	2.2	6.4	4.1	.4		.4														30	32	7
42/ 41	1.1	2.2	3.0			.4														24	29	20
40/ 39	1.9	1.9	1.5	.2	.4															23	31	35	22
38/ 37	.7	2.9	1.5	.4																24	16	19	1
36/ 35	.7	4.1	1.1	.4	.4															17	16	18	22
34/ 33	.4	2.2	.7	.1	.4															12	12	23	22
32/ 31	.1	2.2	2.6	.7																17	17	17	1
30/ 29		3.0	2.6	.4																14	16	11	1
28/ 27		3.7	1.5	.4																17	15	21	
26/ 25			.4																	1	1	12	16
24/ 23		.4	.1																		1	8	13
22/ 21																						2	1
20/ 19																						1	
18/ 17																							
16/ 15			.1																		2		
14/ 13		.4																		1	1	2	
12/ 11																						1	
10/ 9																							
8/ 7																							
4/ 3																							1
2/ 1																							
TOTAL	10.5	47.6	23.8	1.2	1.9	2.6	.4											267	268	267		267

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1704755	20903	78.3	10.023	267							
Dry Bulb	439930	10668	39.8	7.467	268		18.5					90
Wet Bulb	384877	9939	37.2	7.484	267		23.3					90
Dew Point	319876	8852	33.2	9.962	267		35.7					90

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
SAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[illegible] LAJES FIELD, AZ [illegible] STATION NAME | 51-54 YEARS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B.	W.B.	TOTAL Dry Bulb	Wet Bulb Dew Point
48/ 47			.4																		
46/ 45		.4																			
44/ 43		.0	.0																		
42/ 41		.0	2.1	.4																	
40/ 39				.4																	
38/ 37				.0																	
36/ 35		2.1	4.2																		
34/ 33		2.1	2.2	1.7																	
32/ 31		1.3	3.8	2.1																	
30/ 29		2.1	6.7	2.9																	
28/ 27		1.7	7.5	5.0																	
26/ 25		1.3	6.7	1.7																	
24/ 23		2.5	7.5	1.7	.4																
22/ 21		1.7	4.6																		
20/ 19		1.3	3.3																		
18/ 17		.0	2.9																		
16/ 15		.0	1.3																		
14/ 13			2.2																		
12/ 11			4.2																		
10/ 9			.4																		
8/ 7																					
6/ 5																					
4/ 3																					
2/ 1																					
0/ -1																					
TOTAL	20.8	62.1	16.7	.4														240		240	
																		240		240	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1551412	19046	79.4	12.429	240							
Dry Bulb	186096	6890	28.6	7.643	240		74.4					93
Wet Bulb	166469	6051	25.2	7.628	240		77.5					93
Dew Point	127269	5005	20.9	9.787	240	2.3	83.3					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

PSYCHROMETRIC SUMMARY

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew P.
48/ 47		.2	.2																		
46/ 45		.3	.2																		
44/ 43	.1		.2																		
42/ 41	.2	.0	.4	.2																	
40/ 39	.2	.1	.3																		
38/ 37	.2	1.3	.5	.3																	
36/ 35	1.3	2.3	.5																		
34/ 33	1.2	4.3	.7	.2																	
32/ 31	3.3	4.1	.2	.2																	
30/ 29	1.2	4.1	1.3																		
28/ 27	1.3	5.0	1.1																		
26/ 25	1.2	3.1	1.2																		
24/ 23	1.2	4.0	.3																		
22/ 21	1.0	1.4	.2																		
20/ 19	2.1	1.2	.3	.2																	
18/ 17	1.3	4.0																			
16/ 15	.1	4.3																			
14/ 13	1.2	3.0	.2																		
12/ 11	.3	2.0	.2																		
10/ 9	1.1	2.2																			
8/ 7	.2	1.1																			
6/ 5	.1	.2																			
4/ 3		.3																			
2/ 1		.2																			
0/ -1		.2																			
-2/ -3																					
-4/ -5																					
-6/ -7																					
-8/ -9																					
-10/-11																					
-14/-15																					
-16/-17																					
TOTAL	21.1	66.0	9.9	1.0													606	606	606	606	

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3900005	48023	79.2	12.490	606							
Dry Bulb	461407	14459	24.2	2.796	606	.2	76.6					
Wet Bulb	363947	13891	22.9	2.675	606	.2	30.7					
Dew Point	279039	11189	18.5	10.213	606	4.8	75.2					

USAFETAC FORM 0-26-5 (OL A) JUL 68 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 — CAPE PAGE AP — 21=53,65=71

STATION NUMBER — STATION NAME — YEARS — MONTH — HOURS

Temp. F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
50/ 49			.2															2	2		
48/ 47	.1	.2	.2															2	2	1	
46/ 45		.6	.1															7	7	7	
44/ 43	.2	.3	.4	.1														12	13	14	
42/ 41	.3	.6	.2	.1	.1													11	11	12	11
40/ 39	.5	.5	.6															16	16	12	11
38/ 37		.9	.5	.2														20	20	13	11
36/ 35	.6	2.4	.3	.1														46	46	29	1
34/ 33	1.0	3.0	1.0															73	73	58	30
32/ 31	3.3	4.0	.7	.1														111	110	74	60
30/ 29	1.8	4.2	.9	.2														99	99	77	61
28/ 27	1.3	4.5	.6															84	84	75	63
26/ 25	1.7	5.0	.6															94	94	93	77
24/ 23	2.4	3.8	.5															85	85	108	91
22/ 21	1.9	4.1	1.3															101	101	75	70
20/ 19	2.2	6.0	.6	.1														113	113	127	114
18/ 17	1.4	5.2	.2															98	98	97	74
16/ 15	2.6	3.4																77	77	95	91
14/ 13	2.2	3.6	.2															78	78	67	105
12/ 11	1.6	2.4	.1															54	54	70	82
10/ 9	.7	2.4																39	39	43	71
8/ 7	.8	1.3																27	27	33	60
6/ 5	.8	.8																20	20	23	39
4/ 3	.4	.4																16	16	19	34
2/ 1		.3																4	4	6	36
0/ -1																				2	33
-2/ -3																					17
-4/ -5	.2																	3	3	3	10
-6/ -7																					5
-8/ -9																					1
-10/-11																					4
-12/-13																					2
-14/-15																					1
-16/-17																					2

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL A) USAFETAC

2

DATA PROCESSED BY
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93271 — STATION
CAPE COD AIR FORCE/COAST GUARD — STATION NAME
51-53,61-71 — YEARS
— MONTH

FOR H = 0000-2400 HOURS L.S.T.

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
TOTAL	7,8	2,4	2,0	,7	,1													1276	1276

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	8347063	101953	79,9	12,555	1276							
Dry Bulb	702424	29784	23,2	9,286	1282	,2	78,4					93
Wet Bulb	726947	29169	22,1	9,079	1276	,4	82,1					93
Dew Point	559848	22022	17,7	11,142	1276	6,3	85,6					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 STATION | CAPE PAGE AAF [illegible] STATION NAME | [illegible] YEARS | [illegible] MONTH

PART I 0200-1100 HOURS L.S.T.

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F.) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21	22-23	24-25	26-27	28-29	30	≥31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
60/ 59			.1																1	1		
56/ 55			.1																1	1	1	
54/ 53				.1															2	2	1	1
52/ 51			.2	.2				.1											5	5		1
50/ 49			.1	.2															4	4		
48/ 47		.4	.2	.2	.1														11	11	2	1
46/ 45		.4	.4	.2															12	12	6	3
44/ 43		.2	.1	.2	.2														9	9	13	6
42/ 41	.2	.2	.6	.2	.2	.1													16	19	11	11
40/ 39	.4	1.2	.9	.6	.2														42	42	12	12
38/ 37	.1	1.7	1.1	.6	.2														48	46	19	14
36/ 35	.6	3.1	2.1	.6															88	88	28	24
34/ 33	1.3	3.7	1.6	.3	.2														94	94	67	56
32/ 31	2.4	4.4	1.3	.6															113	110	120	69
30/ 29	.9	4.3	1.7	.6															98	98	100	89
28/ 27	.9	4.3	1.2	.3															94	94	90	73
26/ 25	1.5	4.5	2.1	.6															110	110	102	72
24/ 23	1.3	5.5	2.1	.2															116	116	116	96
22/ 21	.4	5.0	1.6	.1															92	92	107	74
20/ 19	1.3	4.1	1.4	.2															89	94	114	75
18/ 17	.8	3.0	.9																66	66	81	87
16/ 15	1.0	1.4	.5																44	44	94	105
14/ 13	.7	1.9	.6																35	35	42	83
12/ 11	.2	1.7	.2																28	28	31	54
10/ 9	.5	1.2	.2																23	23	30	45
8/ 7	.1	.9																	13	13	16	44
6/ 5	.2	.9																	7	7	14	40
4/ 3		.3																	4	4	5	37
2/ 1		.1																	1	1	3	15
0/ -1																					1	23
-2/ -3	.1																		1	1	1	19
-4/ -5																						11
-6/ -7																						11
-8/ -9																						1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL-A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

93237 STATION NUMBER | [illegible] STATION NAME | 53-57 YEARS | [illegible] MONTH

[illegible] HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
-10/-11																			
-12/-13																			
-14/-15																			
-16/-17																			
TOTAL	[illegible]																		

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	7277829	93737	74,2	16,075	1264							
Dry Bulb	1003536	33800	26,7	8,941	1266	,1	68,5					93
Wet Bulb	864033	31253	24,7	8,530	1264	,1	76,3					93
Dew Point	616843	24061	19,0	11,214	1264	6,3	63,6					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2

DATA PRESENTED [illegible]
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[illegible] (3271) [illegible] PAFB, AK — STATION NAME — 61-65, 67-71 — YEARS — [illegible] MONTH

[illegible] 1200-1400 HOURS

Temp F	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	Dew Point
62/ 61					.1													1		
58/ 57	.1	.2		.1														4	2	
56/ 55				.1	.1	.1	.1											7	7	1	
54/ 53			.1	.1	.2	.2												6	6	1	
52/ 51			.2	.2	.2	.1												10	10	2	
50/ 49		.2	.4	.5	.5	.2	.1											22	22	5	
48/ 47		.2	.3	.7	.4	.3												27	27	11	2
46/ 45		.1	.7	1.5	.6													41	41	15	1
44/ 43	.2	.4	1.3	1.0	.7	.2	.1											56	55	23	
42/ 41	.1	.5	2.1	.5	.5	.1												75	75	28	2
40/ 39	.1	1.3	3.0	2.7	1.2	.1												103	103	59	1
38/ 37	.3	1.6	4.2	3.1	.9	.1												104	104	77	25
36/ 35	.3	1.3	4.6	2.2	.9													110	110	74	61
34/ 33	.6	2.0	3.9	2.0	.7													122	122	115	71
32/ 31	.6	2.4	3.1	1.3	.1													127	127	146	74
30/ 29	.3	2.3	3.0	2.3	.1													103	103	111	72
28/ 27	.1	2.3	3.1	1.2	.4													91	91	115	77
26/ 25	.2	1.1	2.6	1.3														85	85	124	91
24/ 23	.1	1.2	1.3	.9														57	57	84	82
22/ 21	.2	1.3	1.3	.4														42	42	76	81
20/ 19	.2	.6	1.2															25	25	53	72
18/ 17	.2	.1	.7															12	12	35	72
16/ 15	.1	.2	.7															12	12	19	61
14/ 13		.2	.2															10	10	14	74
12/ 11		.1	.4															6	6	11	82
10/ 9		.1	.1															2	2	7	91
8/ 7																				5	94
6/ 5																					2
4/ 3																					99
2/ 1																					1
0/ -1																					
-2/ -3																					1
-4/ -5																					1
-6/ -7																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

[redacted] CA F [redacted] A [redacted] 51-54,56-71
STATION STATION NAME YEARS MONTH

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																					TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew P
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31								
-8/-9																									
-10/-11																									
-12/-13																									
-14/-15																									
TOTAL	[illegible]																					1233	1233		

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5022571	79735	61.4	17.346	1233							
Dry Bulb	1475879	41415	33.6	6.296	1233		42.1					93
Wet Bulb	1160851	36581	29.7	7.805	1233		60.3					93
Dew Point	707061	25755	20.9	11.715	1233	5.5	78.4					93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAMP PAGE AUP KOREA/CHUNCHON 51-53,60-71 FEB
STATION STATION NAME YEARS MONTH

HOURS (L.S.T.) 1200-1700

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb	Dew Point
≥ 61					.1												1			
60/ 59					.1												1			
58/ 57		.1	.1	.1													3			
56/ 55			.1	.3	.1		.1										7	7	1	
54/ 53			.3	.3	.5	.1	.2										14	14	[illegible]	[illegible]
52/ 51		.1	.7	.3	.3	.3	.1										26	26	1	2
50/ 49		.1		.5	.6	.3	.2										22	22	10	1
48/ 47			.5	1.0	1.0	.4											35	35	13	2
46/ 45		.2	.7	1.3	1.0	.2											45	45	16	
44/ 43		.7	1.3	2.4	1.2	.7											73	73	17	0
42/ 41	.2	.6	2.1	3.4	1.3	.3											97	97	47	1
40/ 39		2.2	2.3	3.3	1.9	.3											114	114	71	1
38/ 37	.3	1.3	2.4	4.1	1.5	.1											123	123	117	3
36/ 35	.5	1.9	3.7	3.3	1.5												134	134	95	4
34/ 33	.5	1.1	2.6	3.2	1.2												104	104	118	7
32/ 31		.7	2.2	1.5	.7												110	110	138	77
30/ 29	.2	.9	2.4	2.4	.2												72	72	119	[illegible]
28/ 27	.2	1.5	1.9	1.5	.3												63	63	108	71
26/ 25		.8	1.9	1.2													45	45	106	97
24/ 23	.1	.3	1.4	.8													31	31	59	87
22/ 21	.1	.6	1.0	.5													26	26	41	81
20/ 19		.3	.5	.1													17	17	44	74
18/ 17			.0														9	9	25	72
16/ 15		.2	.1														10	10	12	55
14/ 13		.1	.3														4	4	11	51
12/ 11		.1	.1														2	2	7	51
10/ 9																			3	40
8/ 7																			1	44
6/ 5																				26
4/ 3																				15
2/ 1																				10
0/ -1																				16
-2/ -3																				13
-4/ -5																				9

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43271 STATION | CAMP PAGE AAF [illegible]/CHUCHON STATION NAME | 52-53,60-71 YEARS | [illegible] MONTH

[illegible] 1500-1700 HOURS (L.S.T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B. Dry Bulb	TOTAL Wet Bulb Dew Point
-6/ -7																			5
-8/ -9																			5
-10/-11																			13
-12/-13																			4
-14/-15																			1
TOTAL	2	14	43	123	201	[illegible]	2	7	5									1184	1184
																		1184	1184

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4305927	68535	57.9	16.924	1184							
Dry Bulb	1594873	42393	35.8	8.068	1184		30.6					9
Wet Bulb	1218938	30932	31.2	7.522	1184		52.9					9
Dew Point	706179	25525	21.6	11.480	1184	4.9	77.0					8

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 — STATION
CAMP PAGE AAF [illegible]/CHUNCHEON — STATION NAME
21-53,64-66 — YEARS
— MONTH
PART 1 — HOURS (L.S.T.)
1:00-20:00

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
56/ 55			.4															1		1	
52/ 51		.2																1	1	1	
50/ 49		.2	.0	.														1	1	1	
48/ 47			.4															2	2		1
46/ 45			.6	.1	.4															4	
44/ 43		.4	.7	1.1	.2													15	15	6	
42/ 41		.4	1.3	.7	.4													13	13	5	1
40/ 39	.7	2.2	2.9	2.2	.2													45	45	13	1
38/ 37	.6	3.5	4.8	.6	.4													39	54	39	1
36/ 35	.4	4.4	4.1	1.2	.2													57	57	54	23
34/ 33	.9	3.5	4.4	1.5	.4													60	60	60	7
32/ 31	.9	3.3	0.3	2.5														71	72	47	44
30/ 29	.2	4.2	4.1	2.0	.4													69	69	69	45
28/ 27	.4	2.2	3.9	2.3														42	42	08	41
26/ 25	.2	.6	3.5	.9														28	28	47	43
24/ 23		1.0	1.7	.7														23	23	41	33
22/ 21		1.6	1.7	.2														20	20	28	34
20/ 19		.7	1.2	.2														13	13	23	34
18/ 17		1.1	.1															10	10	17	26
16/ 15		.9	.7															4	4	14	32
14/ 13		.4	.2															3	3	9	20
12/ 11	.2																	1	1	6	22
10/ 9																				1	19
8/ 7		.2																1	1		12
6/ 5																				1	13
4/ 3																					10
2/ 1																					6
0/ -1																					9
-2/ -3																					5
-4/ -5																					3
-6/ -7																					1
-8/ -9																					2
-10/-11																					1
-12/-13																					1

Element (X)	Σ_{X^2}	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

2

PSYCHROMETRIC SUMMARY

43271 CAPE PAGE AAF MISSOURI
STATION NAME

51-52,61-66
YEARS

MONTH

HOURS (L.S.T.) 1800-2000

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥ 31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
TOTAL	4.	43	2.	44.	1.	.6	2.	6													

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2558379	36217	66.7	16.242	543							
Dry Bulb	586844	17414	32.1	7.236	543		48.1					9
Wet Bulb	481950	15710	28.9	7.114	543		61.5					9
Dew Point	315397	11733	21.6	10.654	542	3.8	80.1					9

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

432[illegible] CAPE HENRY AAF [illegible], VA | 1951-1960 | [illegible]
STATION NUMBER — STATION NAME | YEARS | MONTH

HOURS [illegible]

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	+31	TOTAL D.B. W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
48/ 47		1.3																	1	1	
46/ 45		.4																1	1	2	3
44/ 43			.4															1	1	1	
42/ 41		.4																1	1		
40/ 39		.4	.4															1	2	2	1
38/ 37	.8	1.3	2.1															4	10	5	2
36/ 35	1.3	0.3	3.3	.4														5	9	13	
34/ 33	.4	1.7	1.3															3	6	19	14
32/ 31	.8	4.2	2.9	.4														23	22	15	9
30/ 29		9.2	2.9	.4														37	37	14	13
28/ 27		12.6	3.4															49	49	42	17
26/ 25	1.3	5.9	2.1	.4														43	23	46	17
24/ 23		2.5	2.9															13	13	20	21
22/ 21	.4	4.2	1.3															14	14	13	34
20/ 19	.4	3.3	.4															12	10	18	12
18/ 17	.4	1.3	.4															3	3	4	13
16/ 15		2.1	.4															2	2	5	23
14/ 13		3.3																4	4	11	9
12/ 11		.4																1	1	3	6
10/ 9																				1	1
8/ 7																					0
6/ 5																					0
4/ 3																					0
2/ 1																					0
TOTAL	7.1	71.1	29.7	2.1														239	239	239	239

Element (X)	Σx^2	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1382250	17912	74.9	12.936	239							
Dry Bulb	201168	6750	28.2	6.652	239		70.8					
Wet Bulb	175907	6279	26.3	6.625	239		76.3					
Dew Point	125117	5035	21.1	8.945	239		83.3					

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DRY-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

43271 CAMP PAGE AAF KOREA/CHUCHON 51-56,60-70
STATION STATION NAME YEARS

HRS LST		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00-02	MEAN	21.6	24.3	35.1	46.6	58.1	64.5	71.4	73.1	60.9	48.0	37.2	26.6	49.7
	S D	8.547	8.634	8.246	6.026	5.230	4.445	4.391	4.125	5.789	6.506	7.501	7.643	18.614
	TOTAL OBS	236	255	279	269	279	293	372	372	360	332	270	240	3557
03-05	MEAN	17.1	21.9	32.3	43.9	54.6	62.8	70.8	72.4	59.8	46.7	36.1	24.2	46.0
	S D	10.101	9.766	8.517	7.348	6.077	4.653	4.780	4.135	6.632	7.503	8.124	8.796	19.734
	TOTAL OBS	522	476	522	510	521	530	613	626	595	617	610	606	6748
06-08	MEAN	14.4	19.6	30.7	44.0	55.1	63.6	71.7	72.6	60.1	46.4	35.6	23.3	45.9
	S D	10.823	10.274	8.514	7.708	5.985	4.832	4.439	4.456	6.842	7.463	8.544	9.269	20.549
	TOTAL OBS	1162	1062	1164	1311	1341	1332	1350	1341	1293	1371	1230	1223	15180
09-11	MEAN	18.6	24.3	37.3	52.3	64.5	70.7	76.8	78.0	66.0	52.6	40.0	26.6	51.9
	S D	10.188	9.444	8.927	7.349	6.022	5.878	5.027	4.905	6.733	7.673	8.376	8.903	21.196
	TOTAL OBS	1163	1060	1164	1311	1341	1331	1350	1341	1293	1370	1225	1217	15166
12-14	MEAN	27.9	33.1	45.5	60.4	73.1	77.4	81.8	83.6	73.5	62.6	47.7	33.7	59.6
	S D	9.177	7.808	7.695	8.509	6.938	7.211	6.053	5.629	5.932	6.953	8.583	8.320	20.407
	TOTAL OBS	1146	1041	1146	1294	1324	1315	1336	1323	1271	1346	1199	1191	14932
15-17	MEAN	33.8	36.3	48.3	62.8	75.5	79.7	83.3	85.0	75.8	66.1	50.1	35.8	62.0
	S D	7.635	7.851	9.288	9.287	7.852	7.819	6.771	6.215	6.068	6.771	8.916	8.072	20.237
	TOTAL OBS	1125	1020	1122	1275	1302	1291	1317	1296	1238	1320	1173	1168	14647
18-20	MEAN	27.4	33.4	45.5	59.8	72.1	76.9	80.9	81.8	71.4	60.4	45.7	32.1	58.6
	S D	7.279	7.747	7.761	8.534	7.547	7.574	6.596	5.979	6.169	6.726	8.248	7.236	20.269
	TOTAL OBS	520	480	527	569	587	594	651	604	568	603	535	543	6781
21-23	MEAN	24.1	28.2	38.9	52.2	63.3	68.7	74.2	75.7	64.1	51.8	39.8	28.2	53.2
	S D	7.830	7.800	8.574	6.070	5.001	5.453	4.630	4.103	5.427	6.224	7.467	6.652	18.665
	TOTAL OBS	233	255	279	269	278	291	372	375	357	337	268	239	3553
ALL HOURS	MEAN	22.8	27.9	39.8	54.0	66.0	71.8	77.4	78.7	67.6	55.6	42.4	29.2	54.1
	S D	11.035	10.841	9.854	10.934	10.467	9.064	7.331	7.175	8.860	10.459	10.154	9.710	21.268
	TOTAL OBS	6107	5649	6203	6808	6973	6977	7361	7278	6975	7296	6510	6427	80564

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

WET-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

47271 (A P PAGE AAF KOREA/CHUCHON 51-56,60-70
STATION STATION NAME YEARS

HRS LST		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00-02	MEAN	19.8	22.4	32.6	42.8	54.3	61.3	68.6	70.9	59.2	46.9	35.4	25.2	47.3
	S D	9.299	8.645	6.316	5.887	5.152	4.115	4.401	4.425	5.619	6.208	7.427	7.628	18.324
	TOTAL OBS	236	255	279	266	279	293	372	371	360	332	267	240	3550
03-05	MEAN	15.9	20.5	30.5	41.2	52.1	60.3	68.9	70.7	58.5	45.4	34.7	22.9	44.3
	S D	9.785	9.576	6.467	6.980	5.670	4.567	5.193	4.208	6.412	7.057	7.980	8.675	19.486
	TOTAL OBS	521	476	522	507	521	530	613	626	595	617	607	606	6741
06-08	MEAN	13.5	18.4	29.0	41.4	52.2	60.8	69.6	70.8	58.8	45.3	34.2	22.1	44.2
	S D	10.473	9.962	6.354	7.432	5.560	4.636	4.779	4.254	6.571	7.154	8.490	9.084	20.111
	TOTAL OBS	1159	1061	1164	1302	1341	1332	1350	1340	1293	1371	1227	1222	15162
09-11	MEAN	17.2	22.2	33.4	46.2	56.7	64.0	71.9	73.0	61.7	49.2	37.1	24.7	47.5
	S D	9.675	8.891	6.189	6.550	4.708	4.511	4.542	3.966	5.765	6.561	8.009	8.534	19.608
	TOTAL OBS	1164	1060	1164	1302	1341	1331	1350	1341	1293	1370	1222	1216	15153
12-14	MEAN	24.4	28.5	38.2	50.0	59.9	66.6	73.8	75.0	64.7	53.8	41.5	29.7	51.6
	S D	7.454	7.070	6.168	6.370	4.770	4.300	4.385	3.813	5.085	5.705	7.616	7.840	17.993
	TOTAL OBS	1146	1041	1146	1280	1324	1315	1336	1323	1271	1346	1199	1191	14918
15-17	MEAN	26.4	30.7	39.7	50.9	60.5	67.3	74.3	75.3	65.2	54.8	42.7	31.2	52.6
	S D	6.887	6.892	6.287	6.356	4.970	4.504	4.409	3.865	5.098	5.624	7.760	7.525	17.468
	TOTAL OBS	1125	1020	1122	1260	1302	1291	1317	1296	1238	1320	1173	1168	14632
18-20	MEAN	24.3	29.0	38.9	49.6	59.7	66.7	73.5	74.5	64.0	53.3	40.7	28.9	51.4
	S D	6.900	7.231	6.222	6.385	5.196	4.511	4.641	4.147	5.053	5.771	7.737	7.114	17.987
	TOTAL OBS	520	480	527	563	587	594	651	604	568	603	535	543	6775
21-23	MEAN	21.9	25.6	35.5	46.1	57.1	63.6	70.2	72.3	60.9	49.1	37.2	26.3	49.6
	S D	7.621	7.775	6.384	5.983	5.035	4.233	4.952	4.269	5.055	5.879	7.484	6.625	18.003
	TOTAL OBS	233	255	279	266	278	291	372	374	357	337	267	239	3548
ALL HOURS	MEAN	20.3	24.8	34.9	46.7	57.0	64.3	71.9	73.2	62.1	50.2	38.4	26.6	48.7
	S D	9.933	9.520	7.467	7.633	6.072	5.219	5.076	4.459	6.244	7.356	8.576	8.840	19.054
	TOTAL OBS	6103	5648	6203	6746	6973	6977	7361	7275	6975	7296	6497	6425	80479

ATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DEW-POINT TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

32?? EAF PAGO AAF KOREA/CHUNCHON 21=56,60=70
STATION STATION NAME YEARS

HRS LST		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00-02	MEAN	12.6	15.0	27.9	38.3	51.3	59.3	67.3	69.9	58.1	45.0	32.6	20.0	44.3
	S D	11.23911.715	9.601	7.530	6.219	4.692	5.618	4.930	5.813	6.482	8.937	9.787	10.488
	TOTAL OBS	336	255	279	266	279	293	371	371	360	332	267	240	3549
03-05	MEAN	9.9	15.2	26.6	37.9	50.0	59.0	68.0	70.0	57.7	44.1	32.3	18.5	41.6
	S D	12.01611.925	9.407	8.143	6.039	5.106	5.774	4.494	6.514	7.351	9.44010.913		11.478
	TOTAL OBS	521	478	522	507	520	530	613	626	595	617	607	606	6740
06-08	MEAN	7.9	13.5	25.1	38.1	49.7	59.0	68.4	69.9	57.8	44.1	31.5	17.8	41.5
	S D	12.26911.694	8.207	8.752	6.209	5.227	5.444	4.469	6.684	7.48410.330		11.194	11.884
	TOTAL OBS	1159	1061	1164	1302	1341	1332	1350	1340	1293	1371	1227	1222	15162
09-11	MEAN	11.0	15.7	26.7	39.2	50.5	60.0	69.5	70.8	59.0	46.1	32.6	19.0	42.9
	S D	11.94111.043	8.499	9.269	6.810	5.980	5.496	4.508	6.307	7.28210.362		11.281	11.497
	TOTAL OBS	1163	1060	1164	1302	1339	1331	1350	1341	1293	1370	1222	1216	15151
12-14	MEAN	14.4	18.0	27.1	39.0	49.9	60.5	70.2	71.4	59.5	46.2	33.0	20.9	43.7
	S D	11.08010.655	8.999	10.534	8.511	6.077	5.636	4.606	6.879	8.11911.034		11.819	11.104
	TOTAL OBS	1146	1041	1146	1280	1324	1315	1336	1323	1271	1346	1199	1191	14918
15-17	MEAN	15.0	18.8	26.8	38.3	49.0	60.3	70.3	71.3	58.8	44.9	32.6	21.5	43.5
	S D	10.80010.567	9.68210.730		9.201	6.506	5.758	4.847	7.430	8.79411.630		11.487	20.988
	TOTAL OBS	1125	1020	1122	1280	1302	1291	1317	1296	1238	1320	1173	1168	14632
18-20	MEAN	15.2	18.8	29.1	38.5	50.2	61.1	70.2	71.4	59.6	47.0	33.5	21.6	44.4
	S D	10.84011.119	9.60610.604		9.083	6.149	5.643	4.962	6.364	7.96711.188		10.654	20.935
	TOTAL OBS	520	479	527	563	597	594	651	604	568	603	535	542	6773
21-23	MEAN	14.3	18.2	29.8	38.9	52.4	60.7	68.3	70.8	59.0	46.5	33.2	21.1	45.5
	S D	11.09311.262	9.179	9.336	7.107	4.861	6.064	5.012	5.468	6.457	9.962	8.945	20.426
	TOTAL OBS	283	255	279	266	278	291	372	374	357	337	267	239	3548
ALL HOURS	MEAN	12.2	16.6	24.9	38.6	50.0	60.0	69.3	70.8	58.7	45.4	32.6	19.9	43.1
	S D	11.74211.306	8.980	9.699	7.722	5.786	5.714	4.706	6.684	7.82410.651		11.280	21.295
	TOTAL OBS	6103	5647	6203	6746	6970	6977	7360	7275	6975	7296	6497	6424	80473

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 51-56,60-72 ALL
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS
		10%	20%	30%	40%	50%	60%	70	80	90		
JAN	ALL	100.0	99.6	97.4	91.5	82.8	67.9	48.4	23.6	5.5	67.1	6498
FEB		100.0	99.9	97.7	90.7	78.3	63.1	43.4	24.8	7.8	66.1	6027
MAR		100.0	99.5	95.4	86.3	74.7	62.2	46.9	30.5	10.7	66.2	6728
APR		100.0	98.1	89.8	79.2	66.6	56.8	43.8	27.4	10.8	63.0	7168
MAY		100.0	98.4	92.1	81.9	71.2	59.4	46.8	30.5	11.1	64.7	7439
JUN		100.0	99.9	98.5	94.0	84.5	72.3	57.9	41.2	17.2	72.2	7432
JUL		100.0	100.0	99.7	98.9	95.2	86.3	72.0	54.4	31.3	79.7	7794
AUG		100.0	100.0	100.0	99.7	96.5	86.2	72.5	58.1	33.4	80.5	7437
SEP		100.0	100.0	99.8	97.8	90.6	79.6	69.2	56.2	32.6	78.4	7226
OCT		100.0	99.9	98.6	93.1	83.9	74.1	63.7	52.2	31.5	75.3	7477
NOV		100.0	99.8	97.6	92.5	84.2	73.9	60.5	46.2	26.7	73.8	6691
DEC		100.0	99.9	98.8	95.0	87.2	74.2	57.1	36.3	13.4	71.7	6585
TOTALS		100.0	99.6	97.1	91.7	83.1	71.3	56.9	40.1	19.3	71.6	84502

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 STATION | CAMP PAGE AAF KOREA/CHUCHON STATION NAME | 52-54,61-72 PERIOD | JAN MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JAN	00-02	100.0	100.0	98.3	93.2	91.1	79.7	53.8	24.2	3.8	70.0	236
	03-05	100.0	100.0	99.4	97.0	92.6	85.8	66.9	36.0	7.6	74.2	541
	06-08	100.0	100.0	99.8	98.0	95.4	88.3	74.6	42.4	11.5	76.3	1270
	09-11	100.0	99.9	99.1	97.0	92.0	82.8	66.5	34.5	9.4	73.5	1270
	12-14	100.0	99.4	96.1	84.9	69.7	47.7	26.2	10.9	3.0	59.4	1242
	15-17	100.0	99.2	92.5	79.7	56.9	33.2	17.4	7.3	1.8	54.2	1186
	18-20	100.0	99.2	95.4	87.9	76.7	54.8	31.2	14.0	3.1	61.8	520
	21-23	100.0	99.1	98.7	94.0	88.0	70.8	50.6	19.3	3.9	67.5	233
TOTALS		100.0	99.6	97.4	91.5	82.8	67.9	48.4	23.6	5.5	67.1	6498

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 52-54,61-72 FEB
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
FEB	00-02	100.0	100.0	100.0	99.2	89.8	77.3	50.6	29.0	8.6	71.1	255
	03-05	100.0	100.0	99.8	98.6	96.0	91.1	68.3	40.9	11.9	76.2	496
	06-08	100.0	100.0	99.7	98.8	97.1	92.3	77.7	47.8	14.1	78.2	1156
	09-11	100.0	99.9	99.0	96.1	90.0	80.0	55.4	30.9	7.9	71.3	1158
	12-14	100.0	99.3	95.4	82.5	61.4	37.7	18.3	10.5	2.7	56.2	1134
	15-17	100.0	99.7	91.7	71.8	46.2	25.8	12.9	6.7	3.1	51.2	1093
	18-20	100.0	100.0	96.9	82.7	59.8	37.3	22.9	12.1	4.4	57.0	480
	21-23	100.0	100.0	99.2	95.7	85.9	63.5	40.8	20.8	9.4	67.3	255
TOTALS		100.0	99.9	97.7	90.7	78.3	63.1	43.4	24.8	7.8	66.1	6027

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 STATION | CAMP PAGE AAF KOREA/CHUCHON STATION NAME | 52-54,61-72 PERIOD | MAR MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L S T)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS
		10%	20%	30%	40%	50%	60%	70	80	90		
MAR	00-02	100.0	100.0	100.0	99.6	95.7	87.5	66.7	40.1	11.1	75.9	279
	03-05	100.0	99.6	99.6	98.9	96.9	92.2	80.6	60.7	20.9	80.4	540
	06-08	100.0	99.9	99.7	98.7	96.5	93.1	82.5	62.7	22.9	81.0	1299
	09-11	100.0	100.0	99.0	94.5	84.3	67.3	43.0	23.3	6.0	67.6	1303
	12-14	100.0	99.4	92.1	69.8	45.3	24.8	12.2	7.1	3.5	51.0	1272
	15-17	100.0	97.9	81.6	55.5	33.8	19.5	12.1	7.4	3.9	46.6	1228
	18-20	100.0	98.9	91.8	75.7	54.5	38.1	23.7	12.3	6.1	55.6	527
	21-23	100.0	100.0	99.6	97.9	90.7	75.0	54.3	30.7	8.9	71.1	280
TOTALS		100.0	99.5	95.4	86.3	74.7	62.2	46.9	30.5	10.7	66.2	6728

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 52-56,61-72 APR
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90		
APR	00-02	100.0	100.0	99.6	98.9	94.7	83.5	65.0	32.3	8.3	74.0	266
	03-05	100.0	99.8	99.8	99.2	97.1	92.6	80.0	57.9	23.2	80.6	525
	06-08	99.8	99.6	99.2	98.1	96.3	91.8	81.2	57.2	24.1	80.4	1417
	09-11	100.0	99.8	97.0	88.4	74.2	54.5	35.1	18.7	8.4	63.0	1398
	12-14	100.0	97.0	78.8	57.4	39.6	26.6	18.2	11.5	6.5	49.1	1383
	15-17	100.0	92.0	68.2	46.9	32.4	22.4	14.7	10.4	5.5	44.8	1350
	18-20	100.0	96.3	78.5	57.9	42.3	28.8	19.0	10.8	5.2	49.2	563
	21-23	100.0	100.0	97.4	86.8	71.8	53.8	36.8	20.3	5.3	62.8	266
TOTALS		100.0	98.1	89.8	79.2	68.6	56.8	43.8	27.4	10.8	63.0	7168

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

2

RELATIVE HUMIDITY

43271 (STATION) CAMP PAGE AAF KOREA/CHUCHON (STATION NAME) 52-56,61-72 (PERIOD) MAY (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
MAY	00-02	100.0	100.0	100.0	100.0	98.6	94.3	78.1	47.3	14.3	78.9	279
	03-05	100.0	100.0	100.0	100.0	99.2	97.5	93.5	75.2	28.0	85.0	521
	06-08	100.0	100.0	100.0	99.5	98.4	96.2	85.7	61.8	24.3	82.4	1467
	09-11	100.0	100.0	98.0	90.5	76.0	54.0	31.3	13.8	4.3	62.3	1460
	12-14	100.0	97.4	82.8	57.9	35.1	20.5	12.4	7.0	3.1	47.2	1438
	15-17	100.0	93.1	71.4	45.1	26.8	16.0	10.9	7.0	3.5	42.9	1409
	18-20	99.8	96.4	84.5	63.4	43.3	25.4	16.2	9.2	4.4	49.8	587
	21-23	100.0	100.0	100.0	98.9	92.1	71.6	46.4	22.7	6.5	69.0	278
TOTALS		100.0	98.4	92.1	81.9	71.2	59.4	46.8	30.5	11.1	64.7	7439

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 51-56,61-72 JUN
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUN	00-02	100.0	100.0	100.0	100.0	99.7	98.0	90.4	65.9	28.7	84.0	293
	03-05	100.0	100.0	100.0	100.0	100.0	99.1	94.3	85.3	41.7	88.0	530
	06-08	100.0	100.0	100.0	100.0	99.9	98.6	91.1	72.9	31.3	85.3	1453
	09-11	100.0	100.0	99.8	98.4	93.1	75.4	49.0	23.9	7.8	70.2	1450
	12-14	100.0	100.0	97.5	88.0	65.0	37.1	19.9	11.7	5.8	58.1	1424
	15-17	100.0	99.7	94.0	78.4	50.9	31.6	18.9	10.5	4.4	54.2	1397
	18-20	100.0	99.8	96.8	87.7	69.4	47.8	30.6	15.8	6.2	60.9	594
	21-23	100.0	100.0	100.0	99.3	97.6	90.7	68.7	43.3	12.0	76.7	291
TOTALS		100.0	99.9	98.5	94.0	84.5	72.3	57.9	41.2	17.2	72.2	7432

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 51-54,56,61-72 Jul
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUL	00-02	100.0	100.0	100.0	100.0	100.0	99.5	92.7	73.9	44.9	87.2	372
	03-05	100.0	100.0	100.0	100.0	100.0	100.0	98.7	88.3	61.5	91.1	613
	06-08	100.0	100.0	100.0	100.0	99.9	99.7	96.1	84.2	52.4	89.5	1474
	09-11	100.0	100.0	100.0	99.8	98.3	91.3	73.7	45.8	19.3	78.8	1467
	12-14	100.0	100.0	99.5	98.0	89.4	69.1	42.6	25.1	12.5	69.4	1432
	15-17	100.0	100.0	99.0	95.9	82.7	59.6	38.0	24.7	11.4	66.8	1416
	18-20	100.0	100.0	99.2	98.2	92.2	74.1	51.4	31.6	14.9	71.9	652
	21-23	100.0	100.0	100.0	99.5	98.7	96.8	82.5	61.6	33.1	82.7	372
TOTALS		100.0	100.0	99.7	98.9	95.2	86.3	72.0	54.4	31.3	79.7	7794

DATA PROCESSING BRANCH
USTAC/USAF
AIR WEATHER SERVICE/MAC

2

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 51-54,56,61-71 AUG
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
AUG	00-02	100.0	100.0	100.0	100.0	100.0	100.0	97.3	89.5	55.3	89.7	371
	03-05	100.0	100.0	100.0	100.0	100.0	100.0	99.2	94.4	68.2	92.4	626
	06-08	100.0	100.0	100.0	100.0	100.0	99.9	97.6	89.7	61.2	91.2	1398
	09-11	100.0	100.0	100.0	100.0	99.8	94.0	76.1	48.1	16.5	79.2	1374
	12-14	100.0	100.0	100.0	99.6	92.9	67.6	35.9	19.3	7.8	68.1	1354
	15-17	100.0	100.0	100.0	98.1	84.8	53.9	30.9	18.4	9.6	65.3	1336
	18-20	100.0	100.0	100.0	99.5	94.5	75.7	52.0	31.5	14.1	72.5	604
	21-23	100.0	100.0	100.0	100.0	100.0	98.4	90.6	73.5	34.8	85.3	374
TOTALS		100.0	100.0	100.0	99.7	96.5	86.2	72.5	58.1	33.4	80.5	7437

2

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 51-54,56,61-71 SEP
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
SEP	00-02	100.0	100.0	100.0	100.0	100.0	100.0	99.2	91.4	60.8	90.6	360
	03-05	100.0	100.0	100.0	100.0	100.0	99.8	99.0	94.6	71.9	92.8	595
	06-08	100.0	100.0	100.0	100.0	100.0	99.6	98.0	91.4	65.5	91.8	1361
	09-11	100.0	100.0	100.0	99.8	98.1	90.1	73.2	51.2	19.6	79.0	1358
	12-14	100.0	100.0	99.9	95.7	78.7	51.4	28.9	15.0	6.0	63.2	1330
	15-17	100.0	100.0	98.6	89.0	59.5	32.7	20.6	13.4	5.1	57.5	1297
	18-20	100.0	100.0	100.0	97.7	88.2	63.9	42.6	22.0	7.4	67.8	568
	21-23	100.0	100.0	100.0	100.0	100.0	98.9	92.4	70.9	24.6	84.2	357
TOTALS		100.0	100.0	99.8	97.8	90.6	79.6	69.2	56.2	32.6	78.4	7226

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 STATION | CAMP PAGE AAF KOREA/CHUCHUN STATION NAME | 51-54,56,60-71 PERIOD | OCT MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80	90		
OCT	00-02	100.0	100.0	100.0	100.0	100.0	100.0	96.7	91.9	55.7	89.4	332
	03-05	100.0	100.0	100.0	99.8	99.2	98.2	95.3	90.9	66.1	91.0	617
	06-08	100.0	100.0	100.0	99.9	99.5	98.4	96.2	91.5	71.8	92.0	1417
	09-11	100.0	100.0	99.9	99.0	96.1	88.7	75.0	53.5	28.0	79.7	1426
	12-14	100.0	99.9	97.5	87.2	62.5	36.9	19.3	7.4	2.2	56.8	1396
	15-17	100.0	99.9	92.6	66.5	36.2	16.1	8.3	4.7	1.9	48.1	1349
	18-20	100.0	100.0	98.8	92.7	78.4	56.6	31.3	13.6	3.5	63.1	603
	21-23	100.0	100.0	100.0	100.0	99.1	97.6	87.8	64.1	20.5	82.6	337
TOTALS		100.0	99.9	98.6	93.1	83.9	74.1	63.7	52.2	31.5	75.3	7477

2

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 (STATION) CAMP PAGE AAP KOREA/CHUNCHON (STATION NAME) 51-54,60-71 (PERIOD) NOV (MONTH)

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (LST)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
NOV	00-02	100.0	100.0	100.0	99.6	99.3	95.1	82.8	66.3	43.4	84.2	267
	03-05	100.0	100.0	100.0	99.3	98.4	95.9	88.8	77.3	46.1	86.4	607
	06-08	100.0	100.0	99.9	99.4	97.3	94.7	87.0	74.6	45.8	85.8	1273
	09-11	100.0	100.0	99.6	96.6	91.5	82.4	67.1	47.6	25.5	76.9	1272
	12-14	100.0	99.7	94.9	84.4	66.1	43.9	28.1	16.9	7.5	59.6	1247
	15-17	100.0	98.7	89.8	75.1	52.6	32.5	20.1	12.1	4.8	54.1	1223
	18-20	100.0	99.8	97.0	89.2	75.9	60.2	38.7	22.1	12.0	64.7	535
	21-23	100.0	100.0	99.6	96.6	92.5	86.5	71.5	52.4	28.8	78.3	267
TOTALS		100.0	99.8	97.6	92.5	84.2	73.9	60.5	46.2	26.7	73.8	6691

DATA PROCESSING BRANCH
ETAC/USAF
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

43271 CAMP PAGE AAF KOREA/CHUCHON 51-53,60-71 DEC
STATION STATION NAME PERIOD MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS
		10%	20%	30%	40%	50%	60%	70	80	90		
DEC	00-02	100.0	100.0	100.0	99.6	97.5	89.6	76.7	54.6	20.4	79.4	240
	03-05	100.0	100.0	99.8	99.7	97.5	91.7	78.2	52.0	19.8	79.2	606
	06-08	100.0	100.0	99.9	99.5	97.4	91.8	78.8	53.9	22.1	79.9	1276
	09-11	100.0	99.9	99.1	96.4	90.3	79.2	65.0	41.9	15.5	74.2	1264
	12-14	100.0	99.3	96.4	87.5	71.0	52.5	29.9	15.2	5.2	61.4	1233
	15-17	100.0	99.8	96.3	83.8	64.7	40.5	22.5	12.0	4.6	57.9	1184
	18-20	100.0	100.0	98.9	94.5	82.1	63.7	42.5	22.1	7.6	66.7	543
	21-23	100.0	100.0	100.0	99.2	96.7	84.9	63.2	38.9	12.1	74.9	239
TOTALS		100.0	99.9	98.8	93.0	87.2	74.2	57.1	36.3	13.4	71.7	6585

USAFETAC FORM JUL 64 0-87-5 (OL A)

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART F PRESSURE SUMMARY


Presented in this part are two tables giving the means, standard deviations, and total number of observations of station pressure and sea-level pressure by month and annual for the local hourly observations corresponding to the eight 3-hourly synoptic times GCT. The same computations are also provided at the bottom of the page for all hours combined. All years of data available are combined in both of these tables, although the overall period is limited by service as indicated below.

NOTES: Station pressure not reported for all services until late in 1945.
Station pressure reported only at 6-hourly times for Air Force stations from Jan 64 - Jul 65.
METAR stations do not report Sea-level pressure for the period Jan 68 - Dec 70.

1. Station pressure is presented in the table in inches of mercury.

2. Sea-level pressure is presented in millibars.

Provided below is a scale to convert station pressure values in inches of mercury or millibars to pressure-altitude in 1000's of feet. This scale is an enlarged model of the pressure-altitude scale in the Smithsonian Meteorological Tables.

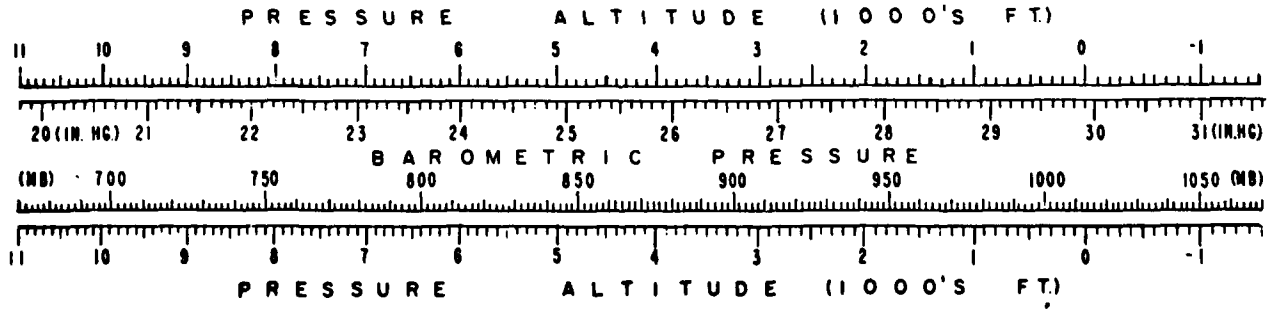

F

S74-29967

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

STATION PRESSURE IN INCHES HG FROM HOURLY OBSERVATIONS

43277 CAMP PAGE AAF KOREA/CHUNCHON 51-54,56,60-63,65-72
STATION STATION NAME YEARS

HRS LST		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00	MEAN	29.968	29.967	29.868	29.747	29.628	29.494	29.503	29.564	29.680	29.860	29.947	30.051	29.753
	S D	.161	.146	.164	.138	.147	.125	.104	.135	.152	.134	.152	.135	.235
	TOTAL OBS	78	85	93	90	93	97	124	124	120	111	90	80	1185
03	MEAN	29.960	29.959	29.871	29.732	29.614	29.491	29.482	29.543	29.674	29.857	29.950	29.999	29.756
	S D	.170	.159	.164	.149	.162	.126	.117	.131	.154	.148	.148	.150	.241
	TOTAL OBS	121	113	124	120	124	128	155	155	150	148	150	141	1629
06	MEAN	29.939	29.941	29.833	29.756	29.615	29.509	29.461	29.514	29.667	29.862	29.943	29.957	29.742
	S D	.179	.164	.193	.163	.153	.123	.119	.133	.154	.148	.162	.160	.239
	TOTAL OBS	363	325	365	389	399	395	430	404	419	431	395	394	4704
09	MEAN	29.961	29.969	29.861	29.776	29.632	29.518	29.474	29.532	29.688	29.890	29.971	29.981	29.765
	S D	.184	.165	.193	.167	.155	.122	.120	.130	.156	.151	.163	.162	.244
	TOTAL OBS	363	322	367	366	384	395	425	395	417	436	397	392	4629
12	MEAN	29.943	29.952	29.837	29.749	29.596	29.494	29.458	29.518	29.668	29.861	29.947	29.965	29.743
	S D	.181	.160	.185	.163	.150	.118	.120	.129	.152	.146	.162	.160	.241
	TOTAL OBS	365	326	376	383	400	395	422	394	419	434	394	393	4701
15	MEAN	29.883	29.880	29.769	29.686	29.548	29.450	29.426	29.483	29.620	29.797	29.885	29.905	29.688
	S D	.175	.159	.177	.154	.141	.115	.117	.127	.142	.134	.154	.153	.228
	TOTAL OBS	345	306	350	365	374	375	408	379	402	414	376	367	4461
18	MEAN	29.886	29.879	29.752	29.660	29.528	29.435	29.421	29.478	29.616	29.796	29.886	29.924	29.683
	S D	.182	.163	.176	.157	.140	.109	.112	.131	.145	.133	.154	.155	.235
	TOTAL OBS	248	225	247	270	279	278	310	261	269	303	283	279	3252
21	MEAN	29.958	29.965	29.848	29.723	29.594	29.468	29.486	29.546	29.669	29.841	29.941	30.037	29.735
	S D	.156	.145	.155	.126	.143	.119	.105	.138	.149	.127	.153	.141	.235
	TOTAL OBS	78	85	93	90	93	98	124	125	120	115	90	80	1191
ALL HOURS	MEAN	29.932	29.934	29.823	29.730	29.591	29.484	29.456	29.515	29.658	29.846	29.932	29.959	29.731
	S D	.181	.165	.186	.163	.153	.123	.119	.133	.153	.146	.161	.161	.240
	TOTAL OBS	1961	1782	2015	2073	2146	2161	2398	2237	2316	2392	2175	2126	25782

DATA PROCESSING BRANCH
USAF ETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

SEA LEVEL PRESSURE IN MBS FROM HOURLY OBSERVATIONS

43271 CAMP PAGE AAF KOREA/CHUCHON 51-54,60-67,71-72
STATION STATION NAME YEARS

HRS LST		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL
00	MEAN	1024,3	1024,5	1020,4	1016,2	1012,3	1007,2	1006,2	1008,3	1012,4	1019,9	1023,2	1027,0	1016,0
	S D	5,444	5,079	5,309	4,862	5,125	4,041	3,991	5,631	5,631	4,874	5,342	4,769	8,702
	TOTAL OBS	78	85	93	90	93	97	124	124	120	111	90	80	1165
03	MEAN	1025,1	1024,0	1020,7	1015,9	1011,9	1007,2	1005,9	1007,9	1012,6	1019,9	1023,7	1025,8	1016,4
	S D	5,941	5,342	5,802	5,179	5,548	4,656	4,170	5,262	5,625	5,280	5,195	5,040	8,891
	TOTAL OBS	121	113	124	120	124	128	155	155	150	147	150	141	1628
06	MEAN	1024,0	1024,3	1019,7	1017,2	1012,6	1008,2	1006,3	1007,9	1013,2	1020,4	1023,4	1024,6	1016,9
	S D	6,336	5,883	6,546	5,713	5,244	4,501	4,218	5,004	5,397	5,311	5,677	5,406	8,612
	TOTAL OBS	309	282	309	300	310	308	341	309	300	348	355	341	3812
09	MEAN	1025,5	1025,4	1020,8	1017,8	1013,0	1007,4	1006,6	1008,2	1013,5	1020,7	1024,8	1026,4	1017,1
	S D	5,711	5,222	6,770	5,701	5,512	4,590	4,095	5,304	5,543	5,604	5,339	5,426	9,116
	TOTAL OBS	123	113	124	120	124	128	186	184	176	180	176	154	1788
12	MEAN	1024,8	1025,1	1019,9	1016,6	1011,7	1006,6	1006,0	1007,6	1012,7	1019,5	1023,9	1025,5	1016,3
	S D	5,577	5,218	6,598	5,415	5,282	4,461	4,065	5,262	5,341	5,300	5,383	5,361	8,980
	TOTAL OBS	124	113	124	120	125	128	186	184	176	180	175	157	1792
15	MEAN	1023,0	1022,7	1018,1	1014,3	1009,7	1005,7	1004,9	1006,4	1011,2	1017,7	1021,7	1023,3	1014,8
	S D	5,701	5,211	5,829	5,386	5,066	4,279	4,023	5,024	5,124	5,082	5,175	5,155	8,548
	TOTAL OBS	166	141	156	151	155	158	217	214	201	212	230	212	2213
18	MEAN	1022,5	1022,4	1017,4	1014,5	1009,5	1005,7	1004,7	1006,3	1011,4	1018,2	1021,5	1023,4	1014,8
	S D	6,160	5,636	5,977	5,240	4,797	4,018	4,151	5,005	5,118	4,732	5,309	5,161	8,540
	TOTAL OBS	310	282	309	300	310	307	342	292	269	323	313	310	3667
21	MEAN	1023,9	1023,8	1019,7	1015,4	1011,1	1006,2	1005,7	1007,7	1012,1	1019,0	1023,1	1026,6	1015,3
	S D	5,291	5,045	5,519	4,470	4,937	4,495	4,116	5,829	5,626	4,800	5,388	4,992	8,737
	TOTAL OBS	78	85	94	90	93	98	124	125	120	115	90	80	1192
ALL HOURS	MEAN	1023,8	1023,8	1019,3	1015,9	1011,3	1006,8	1005,7	1007,4	1012,4	1019,3	1023,0	1024,8	1015,9
	S D	6,008	5,579	6,286	5,477	5,310	4,498	4,171	5,258	5,433	5,234	5,485	5,364	8,769
	TOTAL OBS	1309	1214	1333	1291	1324	1352	1675	1587	1512	1616	1579	1475	17277

END

DATE
FILMED
10-80

DTIC