

AD A091708

DDC FILE COPY

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

15

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER TOP-2-2-602	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) US ARMY TEST AND EVALUATION COMMAND TEST OPERATIONS PROCEDURE ACCELERATION; MAXIMUM AND MINIMUM SPEEDS		5. DATE OF REPORT & PERIOD COVERED Final report
6. AUTHOR		7. PERFORMING ORG. REPORT NUMBER test operations procedure
9. PERFORMING ORGANIZATION NAME AND ADDRESS US ARMY ABERDEEN PROVING GROUND (STEAP-MT-M) ABERDEEN PROVING GROUND, MARYLAND 21005		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DARCOM-R 310-6
11. CONTROLLING OFFICE NAME AND ADDRESS US ARMY TEST AND EVALUATION COMMAND (DRSTE-AD-M) ABERDEEN PROVING GROUND, MARYLAND 21005		12. REPORT DATE 8 August 1980
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 7
16. DISTRIBUTION STATEMENT (of this report) Approved for public release; distribution unlimited. 12/7		15. SECURITY CLASS. (of this report) Unclassified
		18a. DECLASSIFICATION/DOWNGRADING SCHEDULE
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Acceleration Minimum speed Automatic transmission Throttle Gear shift Vehicle, tracked Maximum speed Vehicle, wheeled		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Describes the method of acceleration for achieving maximum and minimum speeds of tracked or wheeled vehicles.		

LEVEL

NOV 18 1980

80 11 12 041

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

441750

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

US ARMY TEST AND EVALUATION COMMAND
TEST OPERATIONS PROCEDURE

DRSTE-RP-702-101

*Test Operations Procedure 2-2-602

AD No.

8 August 1980

ACCELERATION; MAXIMUM AND MINIMUM SPEEDS

	<u>Page</u>
Paragraph 1. SCOPE	1
2. FACILITIES AND INSTRUMENTATION.	1
2.1 Facilities.	1
2.2 Instrumentation	2
3. PREPARATIONS FOR TESTS.	2
3.1 Vehicle Preparations.	2
3.2 Instrumentation	2
4. TEST CONTROLS	2
5. PERFORMANCE TESTS	3
5.1 Acceleration Tests.	3
5.2 Maximum- and Minimum-Speed Tests.	4
6. DATA REDUCTION AND PRESENTATION	5
6.1 Acceleration Tests.	5
6.2 Maximum- and Minimum-Speed Tests.	5

1. SCOPE. This TOP describes how tracked- and wheeled-vehicle-acceleration and minimum- and maximum-speed tests are conducted. The conditions for the tests are also detailed.

2. FACILITIES AND INSTRUMENTATION.

2.1 Facilities.

<u>ITEM</u>	<u>CHARACTERISTICS</u>
Hard-surfaced, straight road at least 2 km long	Level, bituminous or concrete

*This TOP supersedes MTP 2-2-602, 23 March 1966.

Approved for public release; distribution unlimited.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

8 August 1980

TOP 2-2-602

2.2 Instrumentation.

<u>ITEM</u>	<u>MAXIMUM PERMISSIBLE ERROR OF MEASUREMENT*</u>
Speed-measuring device	± 0.2 km/hr, or ± 0.2 mph
Engine tachometer	$\pm 0.5\%$ of full-scale range
Timing device as appropriate	± 0.1 sec.
Recording device as required	System dependent

*Values may be assumed to represent ± 2 standard deviations; thus, the stated tolerances should not be exceeded in more than 1 measurement out of 20.

3. PREPARATIONS FOR TESTS.

3.1 Vehicle Preparations.

a. Prepare the engine, transmission, and when applicable, the governor, for maximum performance per vehicle specifications.

b. Make all pertinent adjustments, such as brakes, throttle linkage, track tension, tire inflation, ignition timing, etc., to comply with specifications.

c. Lubricate all components with the proper quantity and grade of lubricant, and maintain proper levels throughout the tests.

d. Load the vehicle with its normal payload or combat weight. Actual or simulated payload weight shall be prepared in advance.

e. Engine, transmission, and vehicle preparations mentioned above do not apply when the vehicle is being tested in an "as received" condition, or when the effect of completed durability operation on speed and acceleration is desired.

3.2 Instrumentation. Install the speed-measuring device, engine tachometer and suitable timing devices.

4. TEST CONTROLS. Observe the following test restrictions:

a. The road surface shall be smooth and hard-surfaced.

b. The grade shall be minimal (0 to 1%).

c. There shall be no precipitation or foreign matter on the road surface.

d. Wind speed shall not be more than 3.2 km/hr (2 mph) if a cross-wind, and not more than 1.6 km/hr if blowing with or against direction of movement.

e. Operate the test item a minimum of one-half hour prior to test to ensure normal, component-operating temperatures.

5. PERFORMANCE TESTS.

5.1 Acceleration Tests.

NOTE: For vehicles that are required to tow a trailer, this test will be performed with and without a fully payloaded trailer,

5.1.1 Methods. Determine full-throttle acceleration under the following conditions:

a. From a standing start, with engine idling, to maximum road speed in each gear or range (or from minimum speeds in the higher gears when torque is insufficient for a standing start). Record time versus vehicle speed at suitable road-speed increments over the operating speed range in each gear to define the characteristic curve.

b. From a standing start, with engine idling, to maximum road speed while shifting only through gears that permit maximum speed to be reached in the shortest possible time. Record time versus vehicle speed at suitable road-speed increments over the operating speed range in each gear to define the characteristic curve.

c. From one predetermined road speed to another, the exact conditions depending upon the type of vehicle being tested. ^{1/} Record time versus vehicle speed at suitable road-speed increments over the operating speed range in each gear to define the characteristic curve.

d. Make test runs in both directions to negate wind conditions, and make sufficient trials to assure a reliable average value for measurements.

5.1.2 Data Required. Record data as stated in Paragraph 5.1.1.

NOTE: Acceleration time shall be measured from the instant vehicle motion begins. If system-response lag is significant, acceleration time should also be measured from the instant the accelerator is moved.

^{1/} This subtest is not essential to every test program, but may be conducted at the discretion of the evaluator.

8 August 1980

TOP 2-2-602

5.2 Maximum- and Minimum-Speed Tests.

NOTE: For vehicles that are required to tow a trailer, this test will be performed with and without a fully payloaded trailer.

5.2.1 Method for Maximum Speed.

- a. Set the vehicle to full throttle in the lowest gear or range to obtain maximum speed in that gear.
- b. With the vehicle in motion, set the vehicle to full throttle in the next higher gear or range to obtain maximum speed in that gear.
- c. Repeat above until all gears or ranges have been tested.
- d. Repeat procedures with the vehicle moving in the opposite direction.

5.2.2 Method for Minimum Speed.

- a. Set the vehicle to part throttle in the highest gear or range and adjust throttle until minimum speed in that gear is obtained.
- b. With the vehicle in motion, set the vehicle to part throttle in the next lower gear or range to obtain minimum speed in that gear.
- c. Repeat until all gears or ranges have been tested.
- d. Repeat procedures with the vehicle moving in the opposite direction.

NOTE: Minimum speeds are the lowest speeds compatible with smooth engine performance in any given gear or range.

5.2.3 Data Required. Record the following for each measurement taken:

- a. Gear or range.
- b. Maximum road speed (km/hr) and engine speed (rpm) obtained for each gear or range in each direction.
- c. Minimum road speed (km/hr) and engine speed (rpm) obtained for each gear or range in each direction.

8 August 1980

6. DATA REDUCTION AND PRESENTATION.

6.1 Acceleration Tests. The average of the data obtained shall be plotted as time (seconds) versus speed (kilometers per hour) as illustrated in Figure 1.

NOTE: Points for which the engine speed exceeded maximum-rated rpm shall be re-run at maximum-rated speed.

6.2 Maximum- and Minimum-Speed Tests. The two readings for each gear or range (one in each direction) for both maximum and minimum speed shall be averaged and presented as the maximum and minimum speed for the individual gear or range.

Recommended changes to this publication should be forwarded to Commander, US Army Test and Evaluation Command, ATTN: DRSTE-AD-M, Aberdeen Proving Ground, MD 21005. Technical information may be obtained from the preparing activity: Commander, US Army Aberdeen Proving Ground, ATTN: STEAP-MT-M, Aberdeen Proving Ground, MD 21005. Additional copies are available from the Defense Technical Information Center, Cameron Station, Alexandria, VA 22314. This document is identified by the accession number (AD No.) printed on the first page.

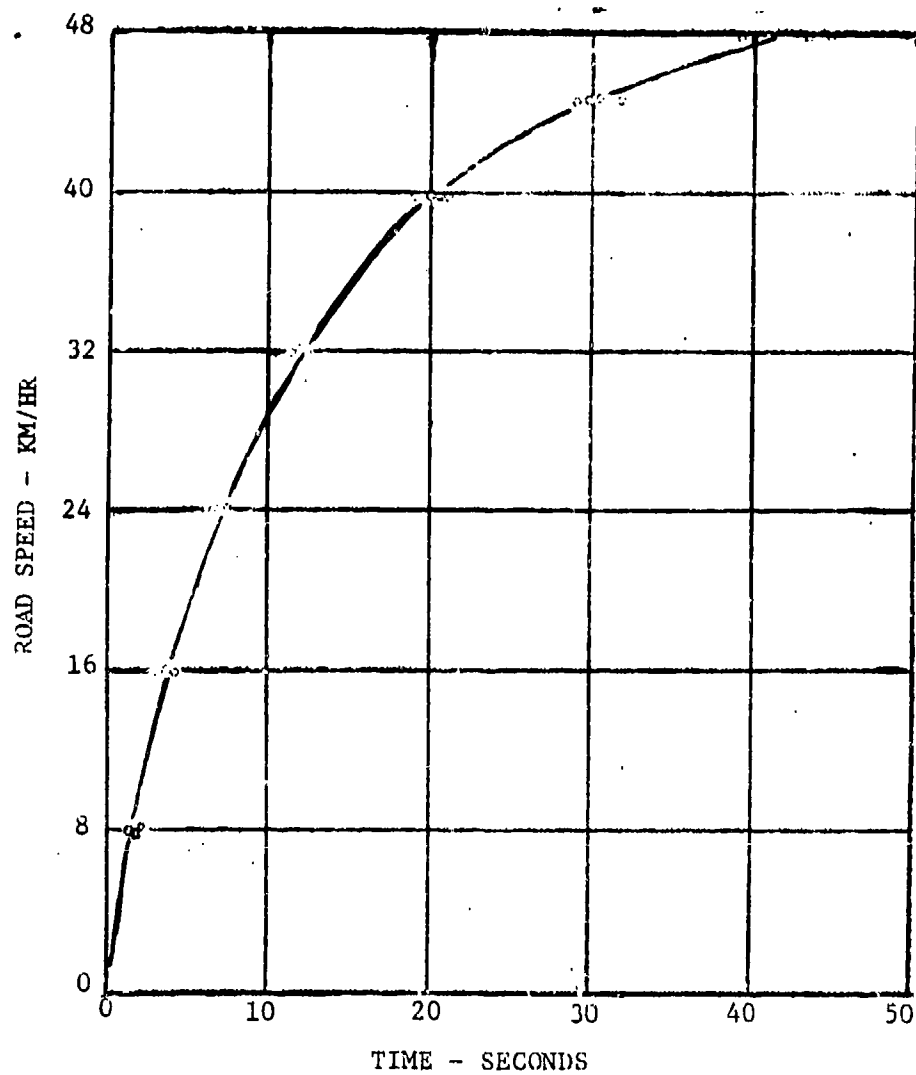


Figure 1. Acceleration (Time-Velocity) Characteristics.

SUPPLEMENTARY

INFORMATION

US ARMY TEST AND EVALUATION COMMAND
Aberdeen Proving Ground, Maryland 21005

AD-A091708
TOP 2-2-602
AD A091708
Change 1

28 January 1981

ACCELERATION; MAXIMUM AND MINIMUM SPEEDS

TOP 2-2-602, 8 August 1980, is changed as follows:

1. Remove pages and insert new pages as indicated below:

Remove pages--

3 and 4

Insert pages--

3 and 4

2. A vertical line in the left margin indicates the changed portion of the revised pages.
3. Attach this sheet to the front of the reference copy for information.

d. Wind speed shall not be more than 10 km/hr (6 mph).

e. Operate the test item a minimum of one-half hour prior to test to ensure normal, component-operating temperatures.

5. PERFORMANCE TESTS.

5.1 Acceleration Tests.

NOTE: For vehicles that are required to tow a trailer, this test will be performed with and without a fully payloaded trailer.

5.1.1 Methods. Determine full-throttle acceleration under the following conditions:

a. From a standing start, with engine idling, to maximum road speed in each gear or range (or from minimum speeds in the higher gears when torque is insufficient for a standing start). Record time versus vehicle speed at suitable road-speed increments over the operating speed range in each gear to define the characteristic curve.

b. From a standing start, with engine idling, to maximum road speed while shifting only through gears that permit maximum speed to be reached in the shortest possible time. Record time versus vehicle speed at suitable road-speed increments over the operating speed range in each gear to define the characteristic curve.

c. From one predetermined road speed to another, the exact conditions depending upon the type of vehicle being tested. ^{1/} Record time versus vehicle speed at suitable road-speed increments over the operating speed range in each gear to define the characteristic curve.

d. Make test runs in both directions to negate wind conditions, and make sufficient trials to assure a reliable average value for measurements.

5.1.2 Data Required. Record data as stated in Paragraph 5.1.1.

NOTE: Acceleration time shall be measured from the instant vehicle motion begins. If system-response lag is significant, acceleration time should also be measured from the instant the accelerator is moved.

^{1/} This subtest is not essential to every test program, but may be conducted at the discretion of the evaluator.

28 January 1981

TOP 2-2-602

5.2 Maximum- and Minimum-Speed Tests.

NOTE: For vehicles that are required to tow a trailer, this test will be performed with and without a fully payloaded trailer.

5.2.1 Method for Maximum Speed.

- a. Set the vehicle to full throttle in the lowest gear or range to obtain maximum speed in that gear.
- b. With the vehicle in motion, set the vehicle to full throttle in the next higher gear or range to obtain maximum speed in that gear.
- c. Repeat above until all gears or ranges have been tested.
- d. Repeat procedures with the vehicle moving in the opposite direction.

5.2.2 Method for Minimum Speed.

- a. Set the vehicle to part throttle in the highest gear or range and adjust throttle until minimum speed in that gear is obtained.
- b. With the vehicle in motion, set the vehicle to part throttle in the next lower gear or range to obtain minimum speed in that gear.
- c. Repeat until all gears or ranges have been tested.
- d. Repeat procedures with the vehicle moving in the opposite direction.

NOTE: Minimum speeds are the lowest speeds compatible with smooth engine performance in any given gear or range.

5.2.3 Data Required. Record the following for each measurement taken:

- a. Gear or range.
- b. Maximum road speed (km/hr) and engine speed (rpm) obtained for each gear or range in each direction.
- c. Minimum road speed (km/hr) and engine speed (rpm) obtained for each gear or range in each direction.