

AD A092011

HEL TM-80-21

July 1950

LEVEL TH

(12)

fw

Two-Stage Servo Valve Development Us 10
A First-Stage Fluidic Amplifier

Richard D. Bowyer

DTIC

ELECTE

NOV 25 1950

A



U.S. Army Electronics Research
and Development Command

Harry Diamond Laboratories

Adelphi, MD 20743

FILE COPY

Approved for public release; distribution unlimited

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturers' or trade names does not constitute an official indorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER HDL-TM-80-21 ✓	2. GOVT ACCESSION NO. AD-A092011	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Two-Stage Servovalve Development Using A First-Stage Fluidic Amplifier.	5. TYPE OF REPORT & PERIOD COVERED Technical Memorandum	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Richard Deadwyler	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Harry Diamond Laboratories 2800 Powder Mill Road Adelphi, MD 20783	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Ele: 6.11.02.A	
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Materiel Development and Readiness Command Alexandria, VA 22333	12. REPORT DATE Jul 80	13. NUMBER OF PAGES 50
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) UNCLASSIFIED	16. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES DRCMS Code: 611102H440011 DA Project: 1L161102A1.44 HDL Project: A44934		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Laminar proportional amplifier (LPA) First-stage Servovalve Second-stage Electrohydraulic Torque motor Fluidic-input Flapper-nozzle valve Spool valve		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This study of first-stage fluidic amplifier usage to date in two-stage servovalves compares first-stage hydraulic amplifiers (torque motor, flapper-nozzle valve) and first-stage fluidic amplifiers. Present trends in fluidic servovalve development are also discussed.		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

1

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

163 050

m

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. Abstract (Cont'd)

The use of first-stage fluidic amplifiers and second-stage, spring-centered spool valves to date shows that this servovalve configuration is feasible. However, fluidic amplifier gain and null variation with fluid temperature is a problem.

The first-stage fluidic amplifier is comparable to the hydraulic amplifier in terms of input signal power, output power, and frequency response. The hydraulic amplifier has less leakage flow and is less temperature sensitive. However, the fluidic amplifier is more reliable in terms of failure modes which cause actuator hardover and in its ability to operate with higher levels of fluid contamination. A two-stage fluidic servovalve with a first-stage, mechanically actuated fluidic-type amplifier and a second-stage spool valve with mechanical feedback was found to be the best two-stage fluidic servovalve configuration.

Future fluidic systems and subsystems will have to interface with electronic controllers or central processing units.

This means that fluidic systems and subsystems must have dual input (fluidic and electronic) servovalves. Microprocessor-level signals may also be used to drive servovalves with first-stage fluidic-type amplifiers--that is, amplifiers with moving parts. Finally, fluidic-type amplifiers are successfully being used in commercially available electrohydraulic servovalves.

Accession For	
FIVE CRASH	
FIVE CRASH	
Unpublished	
Justification	
Distribution	
Availability Codes	
Avail and/or	
Dist	Special
A	

UNCLASSIFIED

CONTENTS

	<u>Page</u>
1. INTRODUCTION	5
2. FIRST-STAGE FLUIDIC AMPLIFIER USAGE	5
3. FIRST-STAGE TORQUE MOTOR FLAPPER-NOZZLE VALVE	9
3.1 Input Signal Power	11
3.2 Output Power	11
3.3 Frequency Response	13
3.4 Leakage Flow	14
3.5 Temperature Sensitivity	14
3.6 Reliability	15
4. FIRST-STAGE FLUIDIC AMPLIFIER	16
4.1 Input Signal Power	16
4.2 Output Signal Power	17
4.3 Frequency Response	19
4.4 Leakage Flow	30
4.5 Temperature Sensitivity	30
4.6 Reliability	31
5. COMPARISON BETWEEN FIRST-STAGE HYDRAULIC AMPLIFIERS AND FLUIDIC AMPLIFIERS	31
5.1 Input Signal Power	32
5.2 Output Power	32
5.3 Frequency Response	32
5.4 Leakage Flow	32
5.5 Temperature Sensitivity	32
5.6 Reliability	34
5.7 Summary	34
6. TRENDS IN FLUIDIC SERVOVALVE DEVELOPMENT	34
7. CONCLUSIONS	35
LITERATURE CITED	37
ACKNOWLEDGEMENT	36
APPENDIX A--TWO-STAGE FLUIDIC INPUT SERVOVALVE RESEARCH AND DEVELOPMENT	39
NOMENCLATURE	41
DISTRIBUTION	47

FIGURES

	<u>Page</u>
1. Fluidic servoactuator schematic with two-stage, flow-control servovalve--1973 program	7
2. Fluidic servoactuator schematic with two-stage, flow-control servovalve--1976 program	8
3. Fluidic servoactuator containing two-stage, flow-control servovalve with pressure feedback	8
4. Fluidic servoactuator containing two-stage, pressure control servovalve with pressure feedback	9
5. Two-stage fluidic pressure control servovalve with first-stage fluidic amplifier and second-stage spool valve	10
6. Hydraulic amplifier schematic showing torque motor, double flapper-nozzle valve	10
7. Hydraulic amplifier output characteristic	12
8. Fluidic amplifier output characteristic	17
9. Single-stage fluidic amplifier block load, pressure-gain frequency response characteristics	20
10. Fluidic amplifier output characteristics for single amplifier and two amplifiers in parallel	21
11. Hydraulic and fluidic amplifier output characteristics	21
12. Two-stage, flow-control electrohydraulic servovalve with direct feedback	23
13. Two-stage, flow-control electrohydraulic servovalve with mechanical feedback	24
14. AiResearch Electrofluidic transducer or amplifier	26
15. Moog deflector jet fluidic amplifier	27
16. Bosch electrofluidic converter or amplifier	27
17. Two-stage, flow-control electrohydraulic servovalve with mechanical feedback	28
18. Two-stage, flow-control electrohydraulic servovalve with electrical feedback	29
19. Output characteristics of hydraulic amplifier with supply pressure P_s and laminar proportional amplifiers with various supply pressures P_{sa}	33

1. INTRODUCTION

Two-stage fluidic servovalves are needed in fluidic control systems requiring power actuation. Continuing studies have been conducted by the U.S. Army Aviation Research and Technology Laboratories (AVRADCOM), the Harry Diamond Laboratories (HDL), university researchers, and industrial engineers to improve servovalves' dynamic performance, power consumption, reliability, and cost. At present, a fluidic input servovalve consisting of a first-stage fluidic amplifier cascade and a second-stage spool valve offers promise for fluid control systems that require power actuation. This study consists of a review of first-stage fluidic amplifier usage to date and the basic features of first-stage torque motor flapper-nozzle valve hydraulic amplifiers and first-stage hydraulic fluidic amplifiers. It also includes a comparison of the torque motor flapper-nozzle valve and fluidic amplifier in terms of input power level, output power, frequency response, leakage flow, temperature sensitivity, and reliability. Present trends in fluidic input servovalve development are also discussed.

2. FIRST-STAGE FLUIDIC AMPLIFIER USAGE

Torque motor flapper-nozzle hydraulic amplifiers are highly developed and have been used as first-stage amplifiers in two-stage electrohydraulic servovalves for nearly three decades. As early as 1973, fluidic amplifiers were used as first-stage amplifiers in two-stage servovalves. A number of efforts will now be discussed in the development of a two-stage fluidic input servovalve consisting of a first-stage fluidic amplifier and a second-stage spool.

Three efforts to develop a two-stage fluidic input servovalve using a first-stage fluidic amplifier ¹⁻³ were sponsored by AVRADCOM as part of its servoactuator development program. The program objective was to develop reliable, low-cost servoactuators for use in hydrofluidic stability augmentation systems (HYSAS). First-stage fluidic amplifiers were used in the servovalves to increase reliability and reduce the cost of servoactuators. Data were not reported on input power level, output power, frequency response, and leakage flow for these programs using first-stage fluidic amplifiers. However, the results of these development programs will be presented.

¹H. C. Kent and J. R. Sjolund, *Hydrofluidic Servoactuator Development*, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-73-12 (May 1973).

²J. K. Sjolund, *Hydrofluidic Servoactuator Development*, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-76-25 (September 1976).

³J. O. Hedeon, *Investigation of a Low-Cost Servoactuator for HYSAS*, Honeywell, Inc., Minneapolis, MN, United States Army Research and Technology Laboratories TR-78-30 (July 1978).

The first development program was completed in 1973.¹ A schematic of the servoactuator used is shown in figure 1. The fluidic servovalve portion of the servoactuator, shown within dashed lines, consists of a first-stage fluidic amplifier cascade (three stages), which drives a second-stage spring-centered spool valve. In this two-stage, open loop, flow-control servovalve, actuator position is fed back to the input of the first-stage cascade by a spool valve feedback transducer. The input signal from the control system is amplified by a three-stage, fluidic amplifier cascade before it is applied to the servovalve. A development model was built and tested. The unit was functional; however, it was noisy, ± 8 percent of full output, and it had gain variation with fluid temperature change. The second program was completed in 1976.² The servoactuator used in this program is shown in figure 2. The fluidic servovalve portion of the servoactuator, shown within the dashed lines, consists of a first-stage fluidic amplifier and a second-stage spring-centered spool valve. This is a two-stage, open loop, flow control servovalve. Actuator position is fed back by a flapper-nozzle feedback transducer. The input signal from the control system is amplified by a single-stage fluidic preamplifier before it is applied to the servovalve. This program was a follow-on to the 1973 program. A development model was built and tested; its response was slightly lower than the first model, and it had gain variation with fluid temperature change.

The third program was completed in 1978.³ Schematics of the servoactuators used are shown in figures 3 and 4. The fluidic servovalve portion of the servoactuator, shown within the dashed line (fig. 3), consists of a first-stage fluidic amplifier cascade (two stages) and a second-stage spring-centered spool valve. Servovalve load flow is fed back through orifice resistors to the input of the first-stage fluidic amplifier cascade. This is a two-stage, closed-loop, flow-control servovalve. The fluidic servovalve portion of the servoactuator, shown within the dashed lines (fig. 4), consists of a first-stage fluidic amplifier cascade (two stages) and a second-stage spool valve. First-stage fluidic amplifier output flow used to drive the second-stage spool valve is fed back through orifice resistors to the amplifier input. This is a two-stage, closed-loop, pressure control

¹H. C. Kent and J. R. Sjolund, *Hydrofluidic Servoactuator Development*, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-73-12 (May 1973).

²J. R. Sjolund, *Hydrofluidic Servoactuator Development*, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-76-25 (September 1976).

³J. O. Hedeon, *Investigation of a Low-Cost Servoactuator for HYSAS*, Honeywell, Inc., Minneapolis, MN, United States Army Research and Technology Laboratories TR-78-30 (July 1978).

servovalve. Breadboard models were assembled and tested. Both the flow control and pressure control servovalves were evaluated. These units had lower response and stiffness than the first unit (fig. 1), and they had gain and null change with fluid temperature changes.

From figures 1 to 4 it is seen that each development program involved a spring-centered, second-stage spool, flow-control servovalve. The third program also involved a pressure control servovalve. Each development effort demonstrated the feasibility of using the first-stage fluidic amplifier, second-stage spool servovalve configuration; however, fluidic amplifier gain change with temperature was a problem in each effort.

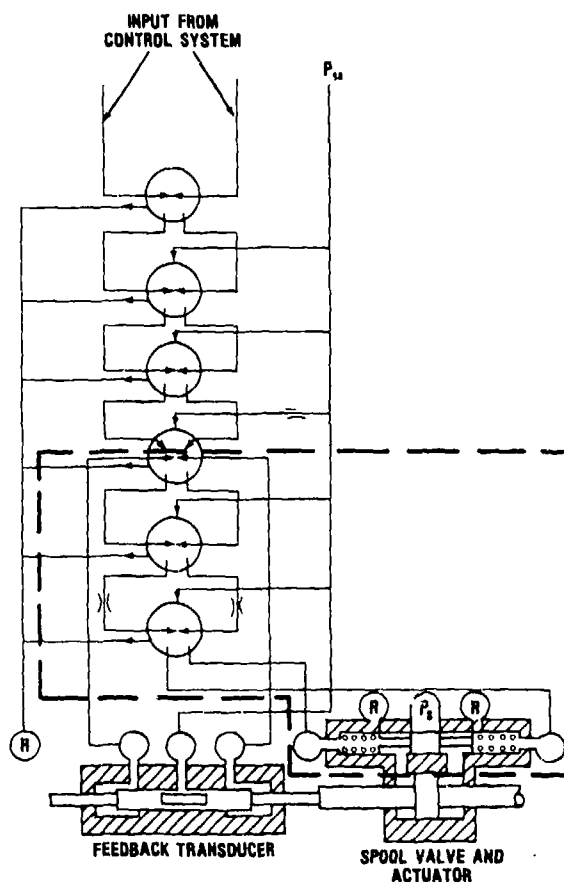


Figure 1. Fluidic servoactuator schematic with two-stage, flow-control servovalve--1973 program. (from H. C. Kent and J. R. Sjolund, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-73-12, May 1973.)

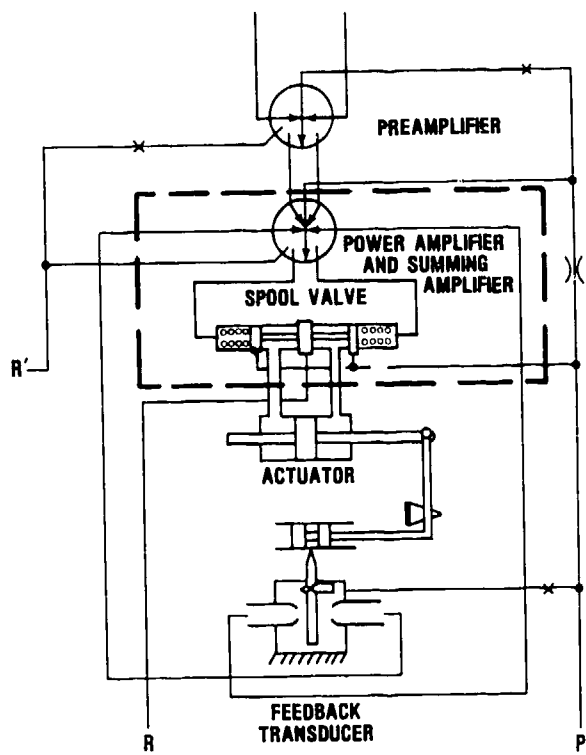
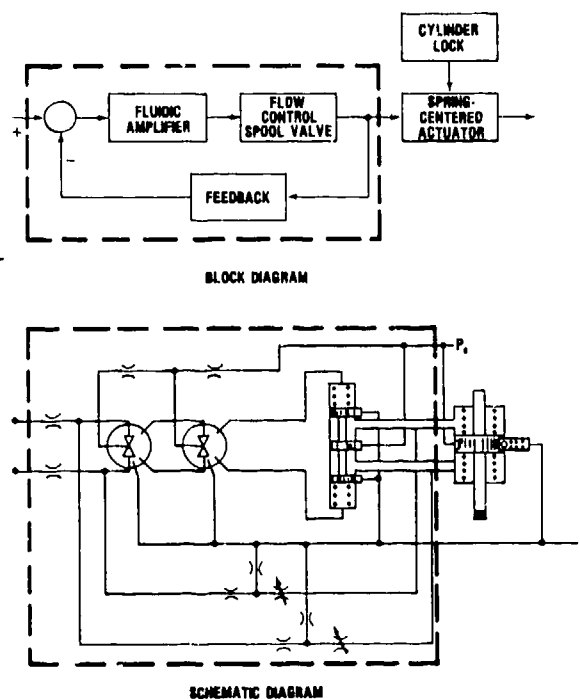


Figure 2. Fluidic servoactuator schematic with two-stage, flow-control servovalve--1976 program. (From J. R. Sjolund, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-76-25, September 1976.)

Figure 3. Fluidic servoactuator containing two-stage, flow-control servovalve with pressure feedback. (Schematic from J. O. Hedeon, Honeywell Inc., St. Louis Park, MN, United States Army Research and Technology Laboratories TR-78-30, July 1978.)



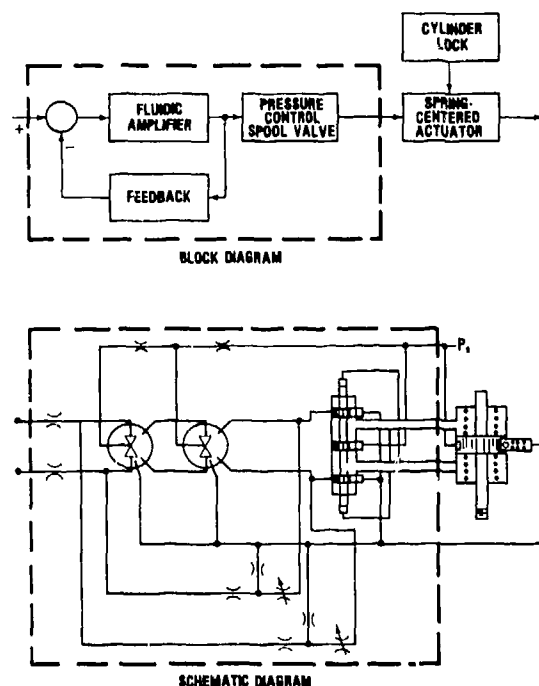


Figure 4. Fluidic servoactuator containing two-stage, pressure control servovalve with pressure feedback. (Schematic from J. O. Hedeem, Honeywell, Inc., St. Louis Park, MN, United States Army Research and Technology Laboratories TR-78-30, July 1978.)

HDL sponsored a study of a single-axis hydrofluidic stabilization system, a portion of which involved the development of a two-stage, fluidic input, pressure control servovalve with a first-stage fluidic amplifier and a second-stage spool valve. The servovalve schematic is shown in figure 5 (p. 10). This is an open loop, pressure control servovalve. The unpublished results of the development and testing of the servovalve indicate that this servovalve concept is feasible, although during system tests using maximum loop gain, considerable high-frequency ringing occurred that was associated with the servovalve. Performance was considered somewhat marginal under this condition. It was concluded that fluidic system temperature insensitivity could be obtained over the 40 to 180 F temperature range (~ 4 to ~ 26 C), where no more than four amplifiers are used, by operating the fluidic amplifiers in the turbulent regime. Additional studies of this servovalve configuration are in progress. These studies are also sponsored by AVRADCOM and HDL.

3. FIRST-STAGE TORQUE MOTOR FLAPPER-NOZZLE VALVE

The first-stage amplifier used in two-stage electrohydraulic servovalves is usually of the type shown in figure 6. This type of valve is also called a hydraulic amplifier. A study of its characteristics will provide a useful reference for comparing first-stage fluidic amplifier cascades. The torque motor converts a low-

power-level electrical input signal into a mechanical torque. The torque applied to the flapper arm controls the output flow from the double nozzle or four-way flapper valve. Some of the important characteristics of the hydraulic amplifier are relatively low-level input signal power, high-output power, good frequency response, relatively low leakage flow, relative temperature insensitivity, and reliability. Each of these characteristics will now be considered.

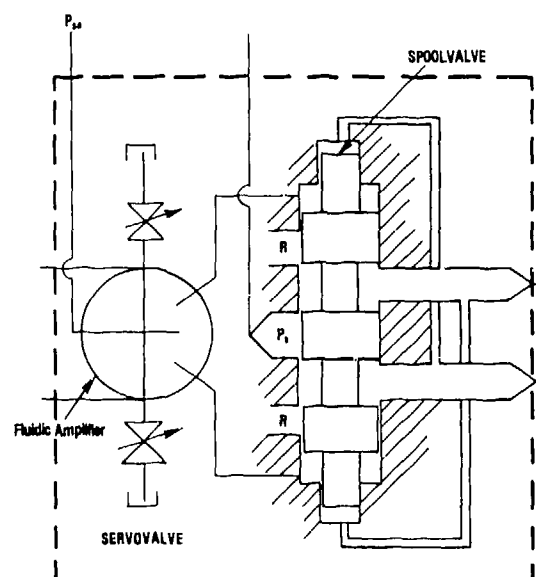


Figure 5. Two-stage fluidic pressure control servovalve with first-stage fluidic amplifier and second-stage spool valve.

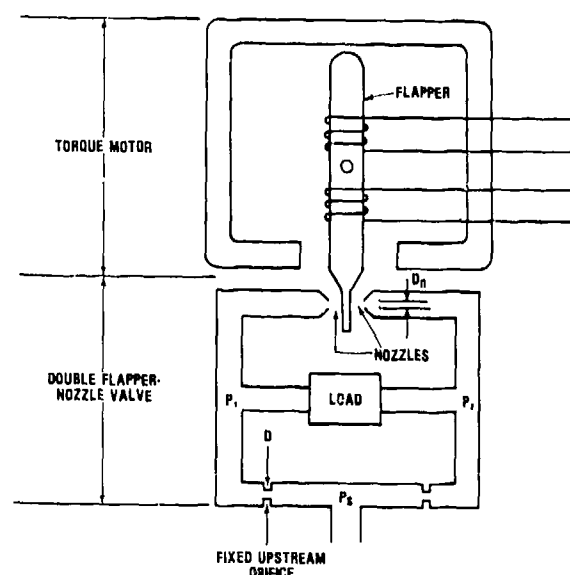


Figure 6. Hydraulic amplifier schematic showing torque motor, double flapper-nozzle valve.

3.1 Input Signal Power

A survey of commercially available two-stage servovalves used in aerospace applications shows that input signal power, W_1 , is in the 50- to 200-mW range.⁴ The torque motor converts the low-level electrical signals into torque on the flapper. Thus, the torque motor essentially acts as an electrical-to-mechanical interface; there is no power gain. The torque motor drives the flapper of the double-nozzle flapper valve.

3.2 Output Power

The flow curve of the flapper-nozzle valve output pressure indicates its available output power. A typical flapper-nozzle output curve for maximum flapper deflection is given in figure 7. This curve was generated with the mathematical approximation shown below. This is an approximation of the actual flapper-nozzle valve output pressure (P_m) flow (Q_m) relationship; the actual relationship is complicated and not useful.⁵

$$P_m = \frac{1}{25} \left[20 - 28 Q_m^2 - 4 Q_m \sqrt{5 - Q_m^2} \right], \quad (1)$$

where

- P_m = nondimensional load pressure = p_m/p_s ,
- P_s = flapper supply pressure, Pa,
- p_m = actual load pressure, Pa,
- Q_m = nondimensional load flow = $q_m/g_f\sqrt{P_s}$,
- $g_f = C_D \frac{\pi}{4} D^2 \sqrt{\frac{2}{\rho}}$, $\sqrt{m^7/kg}$,
- C_D = orifice discharge coefficient,
- ρ = fluid density, kg/m^3
- q_m = actual load flow, m^3/s , and
- D = flapper fixed orifice diameter, m.

Nondimensional output power, W , is

$$W = P_m Q_m. \quad (2)$$

⁴M. Guillon, *Hydraulic Servo Systems Analysis and Design*, Plenum Press, New York (1969).

⁵J. F. Blackburn et al, *Fluid Power Control*, MIT Press and John Wiley and Sons (1960).

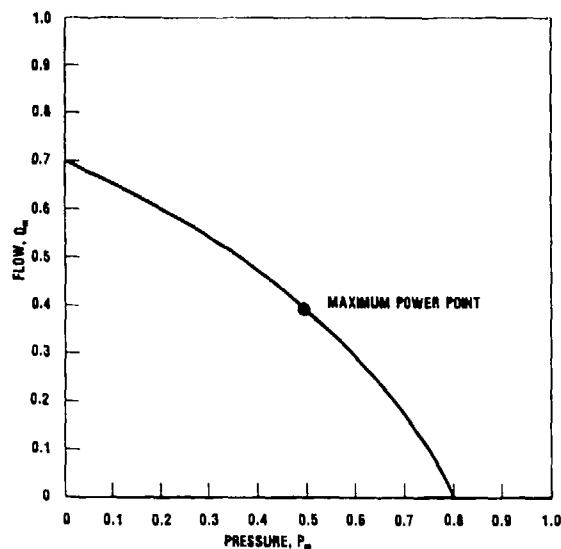


Figure 7. Hydraulic amplifier output characteristic.

Substituting the expression for P_m , equation (1), into equation (2) gives $W = f(Q_m)$. Differentiating this expression with respect to Q_m and setting it equal to zero gives an equation in Q_m which can be solved for maximum output power. Following this procedure gives $Q_m = 0.3956$ and $P_m = 0.4854$ for maximum power output (see fig. 7). The expression for maximum flapper output power, W_0 is

$$W_0 = 0.1920 g_f (P_s)^{3/2} \quad (3)$$

The maximum power gain, G_F , of the first-stage hydraulic amplifier is

$$G_F = \frac{W_0}{W_I} = \frac{0.1920 g_f (P_s)^{3/2}}{W_I} \quad (4)$$

For a nominal flapper diameter of 0.25 mm (0.01 in.), discharge coefficient of 0.65, supply pressure 10.35×10^6 Pa (1500 psi) and $W_I = 100$ mW, the first-stage power gain G_F is approximately 100.

3.3 Frequency Response

The hydraulic amplifier frequency response is determined by the torque motor input circuit and flapper valve dynamics. The amplifier transfer function is

$$T = \frac{K_A}{(\tau_m s + 1) \left[\left(\frac{s}{\omega_n} \right)^2 + \left(\frac{2\zeta}{\omega_n} \right) s + 1 \right]} \quad (5)$$

where

- ω_n = flapper-nozzle natural frequency, 1/s,
- ζ = flapper-nozzle damping ratio,
- s = Laplace transform variable, 1/s,
- τ_m = torque motor time constant, 1/s, and
- K_A = hydraulic amplifier gain constant, $m^5/(ns)$.

However, first-stage hydraulic amplifiers and second-stage spool dynamics are negligible in terms of the overall servovalve response. The overall servovalve response is primarily determined by the amount of first-stage output power available to drive the second-stage spool valve. The spool drive flow, Q_p , required to give rated⁶ servovalve output flow at frequency, f , is

$$Q_p = A_s X_s \omega \quad (6)$$

where

- ω = $2\pi f$, 1/s,
- A_s = spool end area, m^2 , and
- X_s = maximum spool displacement, m.

Rated flow is essentially maximum servovalve output flow from the second-stage spool valve for a no-load (or zero-load pressure drop) condition. Maximum output flow can be achieved only for maximum spool displacement. Thus, X_s is used in equation (6). If the first stage can supply the required spool drive flow, Q_p , then overall servovalve response will be determined by minimal first- and second-stage dynamics and will be very fast. If first-stage output flow is less than Q_p , servovalve response will be reduced accordingly.

⁶W. J. Thayer, *Specification Standards for Electrohydraulic Flow Control Servovalves*, Moog Technical Bulletin 117, Moog, Inc., Pruner Airport, East Aurora, New York (July 1959, Revised June 1962).

Maximum first-stage or hydraulic amplifier output flow, Q_F , is⁵

$$Q_F = \frac{\pi}{4} D^2 C_D \sqrt{\frac{P_S}{\rho}} \quad (7)$$

Equating the maximum output flow from the hydraulic amplifier to the required spool drive flow gives

$$\omega A_S X_S = \frac{\pi}{4} D^2 C_D \sqrt{\frac{P_S}{\rho}} \quad (8)$$

Solving for ω gives

$$\omega = \left[\frac{C_D \left(\frac{\pi}{4} \right) \sqrt{\frac{P_S}{\rho}}}{A_S X_S} \right] D^2 \quad (9)$$

Thus, for a given spool end area, A_S , maximum spool displacement, X_S , and supply pressure, P_S , servovalve response, ω , is determined by the diameter, D , of the flapper orifices.

3.4 Leakage Flow

Servovalve null leakage flow, which is nominally less than 10 percent of the rated or no-load flow from the servovalve,⁷ will now be considered. Null leakage flow consists of first-stage leakage flow or tare flow and second-stage spool leakage flow. Tare flow, Q_e , is of interest here, and for a double nozzle flapper⁸ it is

$$Q_e = 2 C_D \left(\frac{\pi}{4} \right) D^2 \sqrt{\frac{P_S}{\rho}} = 2 Q_F \quad (10)$$

Thus, it can be seen from equations (9) and (10) that high servovalve frequency response is achieved at the expense of leakage flow. Tare flow is twice the maximum output flow from the hydraulic amplifier.

3.5 Temperature Sensitivity

The flapper-nozzle valve is relatively temperature insensitive. Two aspects of the sensitivity of double flapper-nozzle

⁵J. F. Blackburn et al, *Fluid Power Control*, MIT Press and John Wiley and Sons (1960).

⁷H. C. Morse, *Electrohydraulic Servomechanisms*, McGraw-Hill Book Co., New York (1963).

⁸H. E. Merritt, *Hydraulic Control Systems*, John Wiley and Sons (1967).

valve fluid temperature will be considered--flow gain and null shift. The linearized flow gain of the double flapper-nozzle valve (fig. 6) is⁸

$$\left. \frac{\Delta Q_L}{\Delta X} \right|_{\Delta P_L = 0} = C_{Df} D_N \left(\frac{P_s}{\rho} \right)^{1/2},$$

where C_{Df} is the discharge coefficient of the annular curtain area between the nozzle and flapper, and D_N is the nozzle diameter. The discharge coefficient C_{Df} is relatively insensitive to changes in Reynolds number⁹ (here due to temperature) with a value of approximately 0.63. Fluid density, ρ , is also essentially constant for changes in fluid temperature; therefore, flapper flow gain is essentially constant and not a function of temperature. The second consideration is flapper valve null shift due to changes in fluid temperature. The null shift of the flapper valve is temperature sensitive. However, most electrohydraulic servovalves use a double nozzle flapper in the first stage because the two nozzles make this configuration relatively immune to changes in its null shift due to resulting changes in supply pressure and/or temperature.⁸ Two-stage electrohydraulic servovalves using a first-stage flapper-nozzle valve typically provide normal performance over the 0- to 165-F temperature range, and limited response to input commands at -65 F. .

3.6 Reliability

The reliability of hydraulic amplifiers has been continually improved over the years.¹⁰ The first major improvement was the use of a double nozzle-flapper valve rather than the previously used single-nozzle-flapper valves. This change reduced null offsets caused by environment (temperature, pressure, etc.). The second improvement was isolation of the torque motor from the hydraulic oil. Both of these improvements increased amplifier reliability. However, in spite of these improvements, the hydraulic amplifier still has two failure modes that lead to actuator "hardover," which can result in a catastrophic failure. A hardover actuator failure is the uncontrolled driving of the actuator to one or the other extremes at maximum power. Actuator hardover can be caused by electrical short circuits in the torque motor circuit and by the sudden blockage of one of the orifices (due to large-particle contamination) in the flapper-nozzle valve. In both cases,

⁸H. E. Merritt, *Hydraulic Control Systems*, John Wiley and Sons (1967).

⁹A. Lichtarowicz and E. Markland, *Calculation of Potential Flow with Separation in a Right-Angled Elbow with Unequal Branches*, J. Fluid Mech., Cambridge University Press, 17, Pt 4 (December 1963).

¹⁰R. H. Maskrey and W. J. Thayer, *A Brief History of Electrohydraulic Servomechanisms*, American Society of Mechanical Engineering Journal of Dynamic Systems Measurement and Control (June 1978).

maximum hydraulic amplifier output power is applied to one end of the spool, resulting in actuator hardover at maximum power. In many aircraft applications, servoactuators control aerodynamic surfaces of aircraft. In the event of a hardover failure, the aerodynamic surface is forced to one extreme position and the pilot has little or no control of the surface. In this instance, hardover failure can result in a catastrophe.

4. FIRST-STAGE FLUIDIC AMPLIFIER

Two-stage, fluidic input servovalves are necessary components of fluidic control systems requiring power actuation. These valves have been the subject of continuing study since 1962. The objective has been to develop a valve which would (1) accept low-level, fluidic input signals, (2) have dynamic performance (frequency response) comparable to two-stage electrohydraulic servovalves, (3) be low in cost, and (4) be very reliable. Many fluidic input servovalve configurations have been studied (see appendix A). Most of the first-stage amplifier configurations have involved the use of metallic bellows that act upon a level bar so that pressure signals are converted into torque. Servovalves using a first-stage bellows configuration have been successfully demonstrated.¹¹ Nevertheless, the use of bellows in the first stage limits the valve's potential because the bellows (1) are costly, (2) are very susceptible to rupture due to overpressure, and (3) limit overall frequency response for high-performance servovalves.¹² Therefore, there has been renewed interest in fluidics for first-stage amplifiers. The fluidic amplifier has no moving parts, low production cost, and high reliability. The following amplifier characteristics will be considered: (1) input signal power level, (2) output power, (3) frequency response, (4) leakage flow, (5) temperature sensitivity, and (6) reliability.

4.1 Input Signal Power

Control systems with large dynamic ranges are of interest here; therefore, laminar proportional amplifiers (LPA's) will be considered. In general, LPA's have extremely low thresholds and can be driven easily by 100-mW (or 0.1 W) input signals.

¹¹L. J. Banaszak and W. M. Posingies, *Hydrofluidic Stability Augmentation System (HYSAS) Operational Suitability Demonstration*, United States Army Air Mobility Research and Development Laboratory TR-77-31 (October 1977).

¹²D. Lee and D. N. Wormley, *Hydraulic Signal-Processing Amplifier Performance in Position Control Systems*, Massachusetts Institute of Technology, Cambridge, MA, Harry Diamond Laboratories, HDL-CR-77-191-1 (December 1977).

4.2 Output Signal Power

Fluidic amplifier output power is indicated by its output pressure flow curve. Figure 8 gives a typical fluidic amplifier output curve where the amplifier nozzle width, b_s , height, h , and supply pressure, P_{sa} , are $5 \times 10^{-4}m$, $2.05 \times 10^{-4}m$, and 110 kPa, respectively. Fluidic amplifier output curves (fig. 8) have an orifice characteristic¹³ and can be described by equation (11).

$$Q_n = \sqrt{1 - 2P_n} \quad , \quad (11)$$

where

- P_n = nondimensional output or load pressure (p_n/P_{sa}),
- P_{sa} = fluidic amplifier supply pressure, Pa,
- p_n = actual output pressure, Pa,
- Q_n = nondimensional output flow q_n/Q_{sa} ,
- Q_{sa} = fluidic amplifier supply flow, m^3/s , and
- q_n = actual output flow, m^3/s .

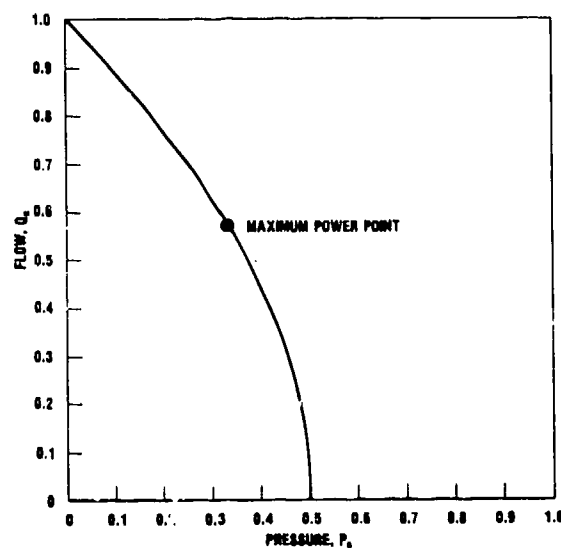


Figure 8. Fluidic amplifier output characteristic.

¹³J. M. Kirshner, *Fluid Amplifiers*, McGraw-Hill (1966).

Nondimensional output power W^1 is given as

$$W^1 = P_n Q_n \quad (12)$$

Substituting the expression for Q_n , equation (11), into equation (12) gives $W^1 = f(P_n)$. Differentiating $W^1 = f(P_n)$ with respect to P_n , and setting this expression equal to zero gives an equation in P_n for the maximum power condition. Following this procedure gives

$$P_n = \frac{1}{3} \text{ and } Q_n = \sqrt{\frac{1}{3}} \text{ (see fig. 8), or}$$

$$p_n = \frac{1}{3} P_{sa} \text{ and } q_n = \sqrt{\frac{1}{3}} Q_{sa} \quad (13)$$

where

$$Q_{sa} = g_a \sqrt{P_{sa}}, \text{ m}^3/\text{s},$$

$$g_a = C_{Da} A_{sa} \sqrt{\frac{2}{\rho}}, \sqrt{\text{m}^7/\text{kg}},$$

C_{Da} = amplifier supply nozzle discharge coefficient, and

A_{sa} = amplifier supply nozzle area ($b_s h$), m^2 .

Therefore, $p_n = \frac{1}{3} P_{sa}$, $q_n = \sqrt{\frac{1}{3}} g_a \sqrt{P_{sa}}$, and maximum output power,

$$W_0^1 = 0.1924 g_a (P_{sa})^{3/2} \quad (14)$$

This expression for maximum amplifier output power is very similar to equation (3) for maximum output power for the flapper-nozzle valve. The maximum power output ratio $\psi = W_0^1/W_0$, is

$$\psi = 1.002 \frac{g_a (P_{sa})^{3/2}}{g_f (P_s)^{3/2}} \quad (15)$$

If the amplifier supply pressure P_{sa} is made equal to the flapper-nozzle valve supply pressure, P_s , and $C_{Da} = C_D$, then $g_a/g_f = (b_s h)/(D^2/4)$, and ψ becomes

$$\psi = 1.002 \frac{(b_s h)}{(\pi D^2/4)} \quad (16)$$

Thus, the power ratio essentially becomes the ratio of amplifier supply nozzle area to flapper-nozzle orifice area. The nominal flapper orifice diameter has a maximum value of $2.5 \times 10^{-4} \text{ m}$ (0.01 in.), and $(b_s h)$ is $(5 \times 10^{-4} \text{ m} \cdot 2.05 \times 10^{-4} \text{ m})$ for this type of application. For these nominal geometries, the maximum output power ratio is

$$\psi = \frac{W_O^1}{W_I} = (1.002)(2.08) = 2.09 \quad (17)$$

Thus, the fluidic amplifier operated at the same supply pressure as the flapper-nozzle valve nominally has twice the maximum output power. Maximum fluidic amplifier power gain, G_A , is

$$G_A = \frac{W_O^1}{W_I} = \frac{0.1924 g_a (P_{sa})^{3/2}}{W_I} \quad (18)$$

From equations (4), (17), and (18) G_A has a value

$$G_A = 2.09 G_F = 200 \quad ,$$

where W_I^1 is 100 mW. However, since the self-staged power gain of fluidic amplifiers is approximately 15, two or more amplifiers in series will be required to achieve a power gain of 200.

4.3 Frequency Response

Frequency response of a typical LPA using hydraulic oil is shown in figure 9.¹² Again, the overall servovalve frequency response is basically determined by the amount of first-stage output power

¹²D. Lee and D. N. Wormley, *Hydraulic Signal-Processing Amplifier Performance in Position Control Systems*, Massachusetts Institute of Technology, Cambridge, MA, Harry Diamond Laboratories, HDL-CR-77-191-1 (December 1977).

available to drive the second-stage spool valve. The required spool drive flow for servovalve response, ω , is given as $\omega A_s X_s$. The amplifier output characteristic, the lower curve in figure 10, gives the output flow and pressure that it can provide. If the point describing the required spool drive flow, Q_p , and pressure, P_p , were plotted on the output characteristic of a first-stage amplifier cascade and it fell to the right of the curve, then the amplifier could not drive the spool to obtain maximum servovalve response at frequency, ω . In this instance, another amplifier could be added in parallel to the last stage of the amplifier cascade. The amplifier cascade output characteristic would now be described by the upper curve in figure 10. Since point (Q_p, P_p) is to the left of the upper curve, the amplifier cascade can drive the spool to obtain maximum servovalve response at frequency, ω (that is, servovalve response limited or determined solely by first-stage amplifier and second-stage spool dynamics).

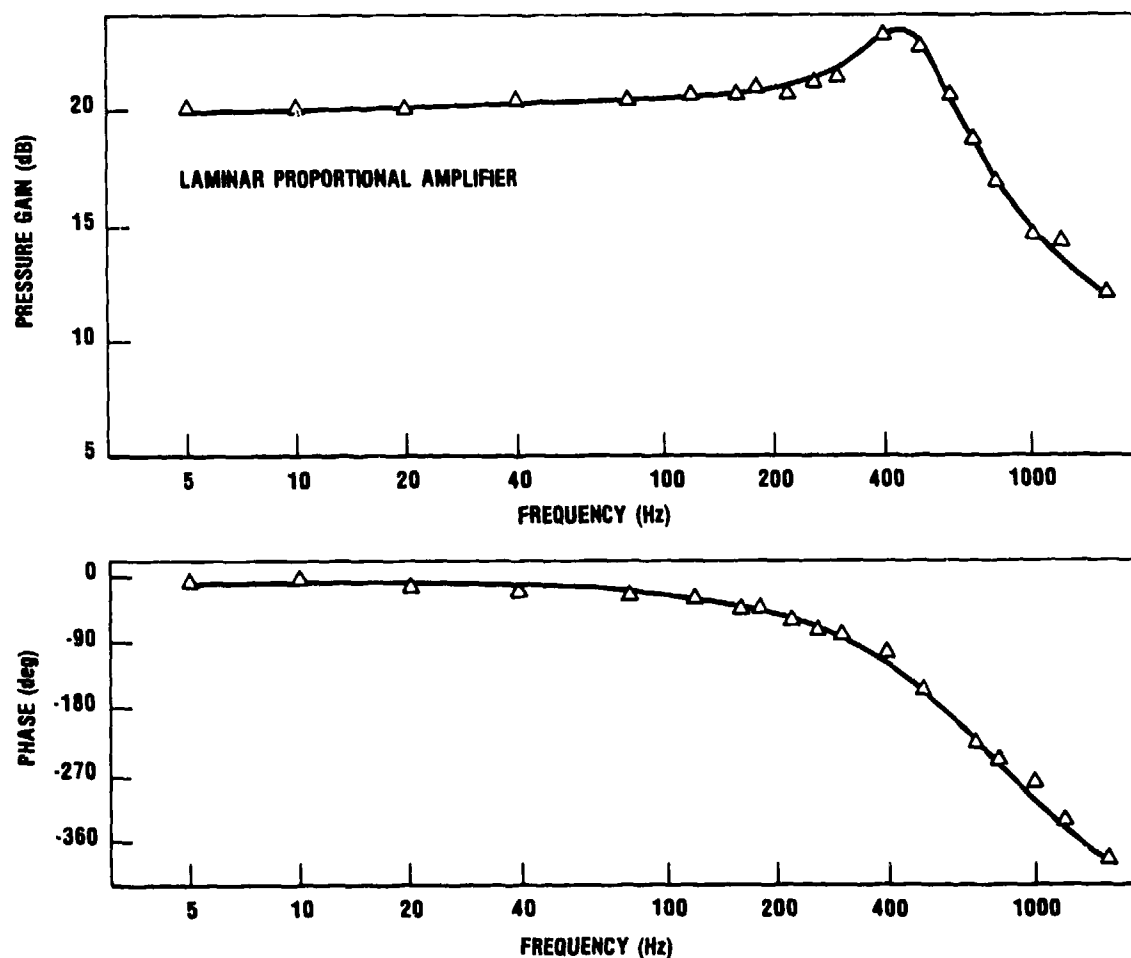


Figure 9. Single-stage fluidic amplifier block load, pressure-gain frequency response characteristics. (Data from D. Lee and D. N. Wormley, Massachusetts Institute of Technology, Harry Diamond Laboratories, HDL-CR-77-191-1, December 1977.)

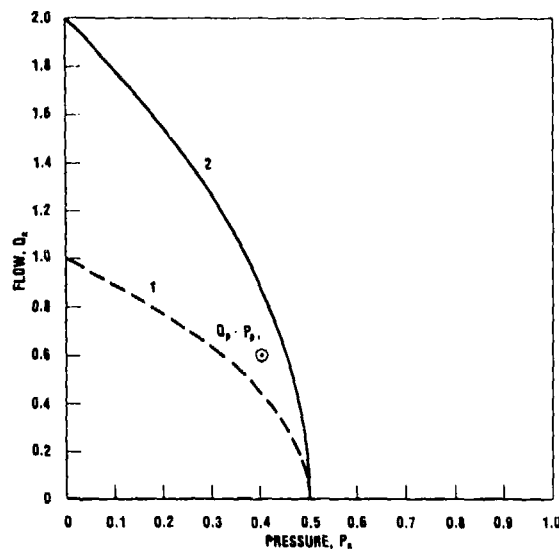


Figure 10. Fluidic amplifier output characteristics for single amplifier (1) and two amplifiers in parallel (2).

The fluidic amplifier and flapper-nozzle output curves are plotted in figure 11. The fluidic amplifier output pressure flow curve (eq (20),

$$Q_n/Q_{sa} = \sqrt{1 - 2 (P_n/P_{sa})} \quad , \quad (20)$$

has been written in terms of the flapper pressure-flow characteristics to give

$$Q_n/2.08 g_f \sqrt{P_s} = \sqrt{1 - 2 (P_n/P_s)} \quad , \quad (21)$$

where $P_{sa} = P_s$ and $g_a = 2.08 g_f$. The fluidic amplifier has higher maximum output power than the flapper-nozzle valve, as previously noted; however, if the required spool drive pressure flow point is plotted on figure 11 and it falls to the right of the intersection of the curves, then the flapper will be able to supply more output power than the fluidic amplifier to drive the spool. If it falls to the left of the intersection, then the fluidic amplifier can supply more output power to drive the spool.

The magnitude of the required spool drive pressure and flow on the first-stage output characteristic is important in terms of the type

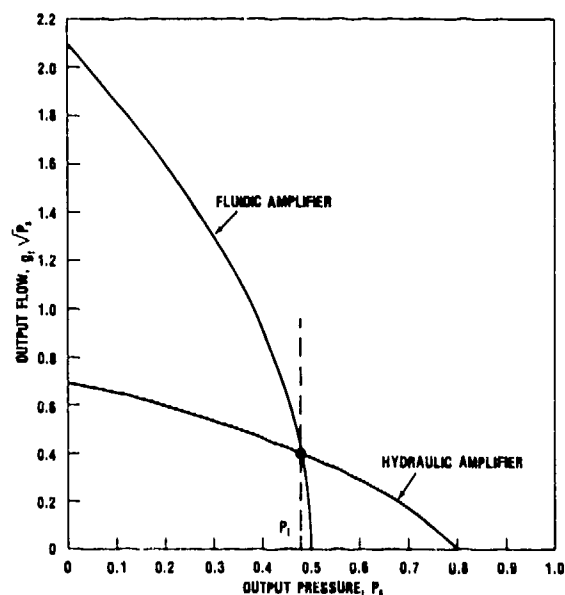


Figure 11. Hydraulic and fluidic amplifier output characteristics.

of spool position feedback that is used. Second-stage spool position feedback may be achieved in three basic ways.

1. By placement of stiff springs at the spool ends that act to center the spool against the pressure differential caused by the first stage. This type of servovalve configuration can be seen in figures 1, 2, and 5. In each case the first stage is a fluidic amplifier, which drives a spring-centered, second-stage spool valve. The servovalves shown in figures 1, 2, and 5 are two-stage, open loop servovalves.

2. By direct position feedback, as shown in the two-stage, electrohydraulic servovalve of figure 12. The first stage is a hydraulic amplifier which has direct spool position feedback, and the second stage is a spool valve. This is a two-stage, closed loop servovalve.

3. By use of a mechanical spring to convert spool position to a force signal which is fed back to the torque motor. This type of servovalve configuration can be seen in the two-stage, electrohydraulic servovalve, figure 13. The first stage is a hydraulic amplifier, which drives a second-stage spool valve. This is a two-stage, closed loop servovalve.⁸

⁸H. E. Merritt, *Hydraulic Control Systems*, John Wiley and Sons (1967).

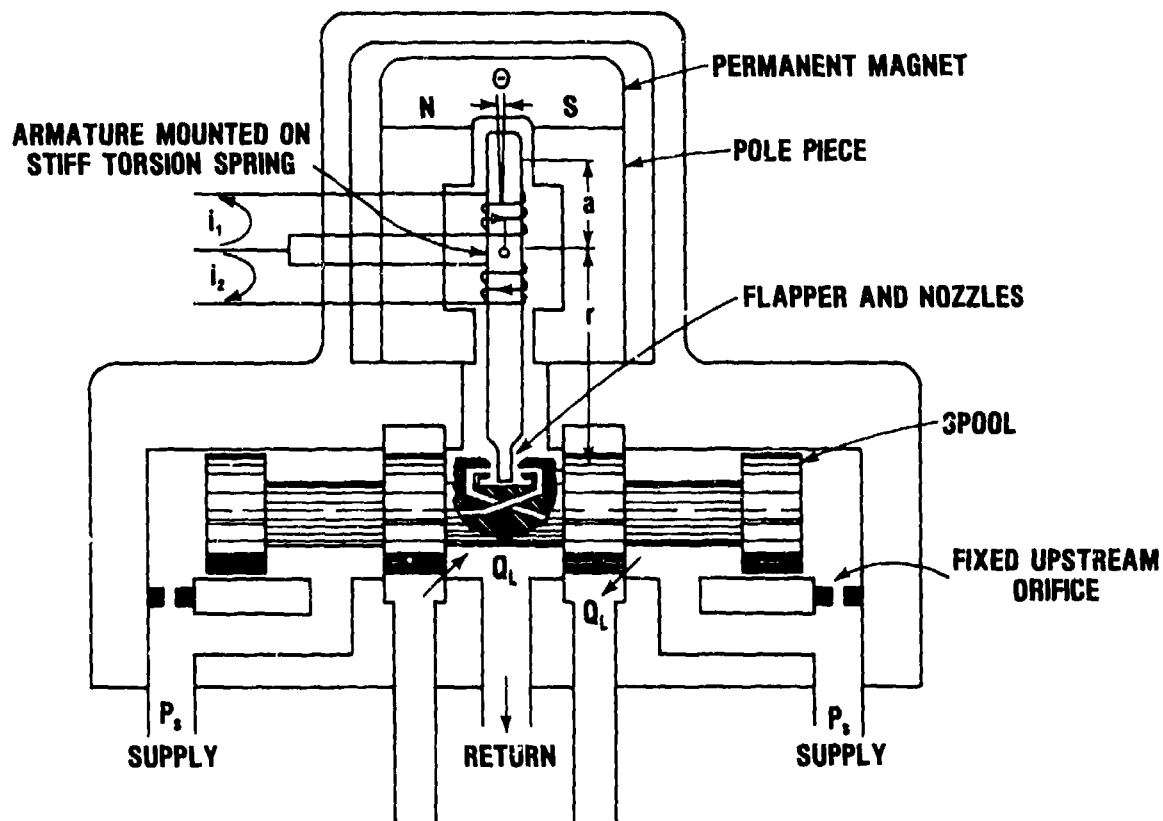


Figure 12. Two-stage, flow-control electrohydraulic servovalve with direct feedback. (Schematic from H. E. Merritt, John Wiley and Sons, 1967.)

The use of stiff springs at the spool ends provides an open loop type of servovalve. Centering springs with very high stiffness (large spring constants) are used so that the force required to move the springs is much greater than the flow forces on the spool. In this way the first-stage amplifier can drive the second-stage spool in a linear, open loop manner.¹⁴ However, the use of stiff centering springs necessitates a very high first-stage output pressure. Therefore, if the required spool drive pressure for a given application were greater than P_1 (fig. 11), then the flapper-nozzle first stage could provide greater output power and thus higher overall servovalve frequency response than

¹⁴R. Deadwyler and F. M. Manion, *Design Considerations for Improved Fluidic Input Servovalve Performance*, Harry Diamond Laboratories HDL-TM-79-4 (April 1979).

the first-stage fluidic amplifier. If a first-stage fluidic amplifier were used in this instance, a number of parallel amplifiers would be required. The penalty here is additional leakage flow. An alternative would be to use less stiff centering springs; the penalty here is reduced linearity.

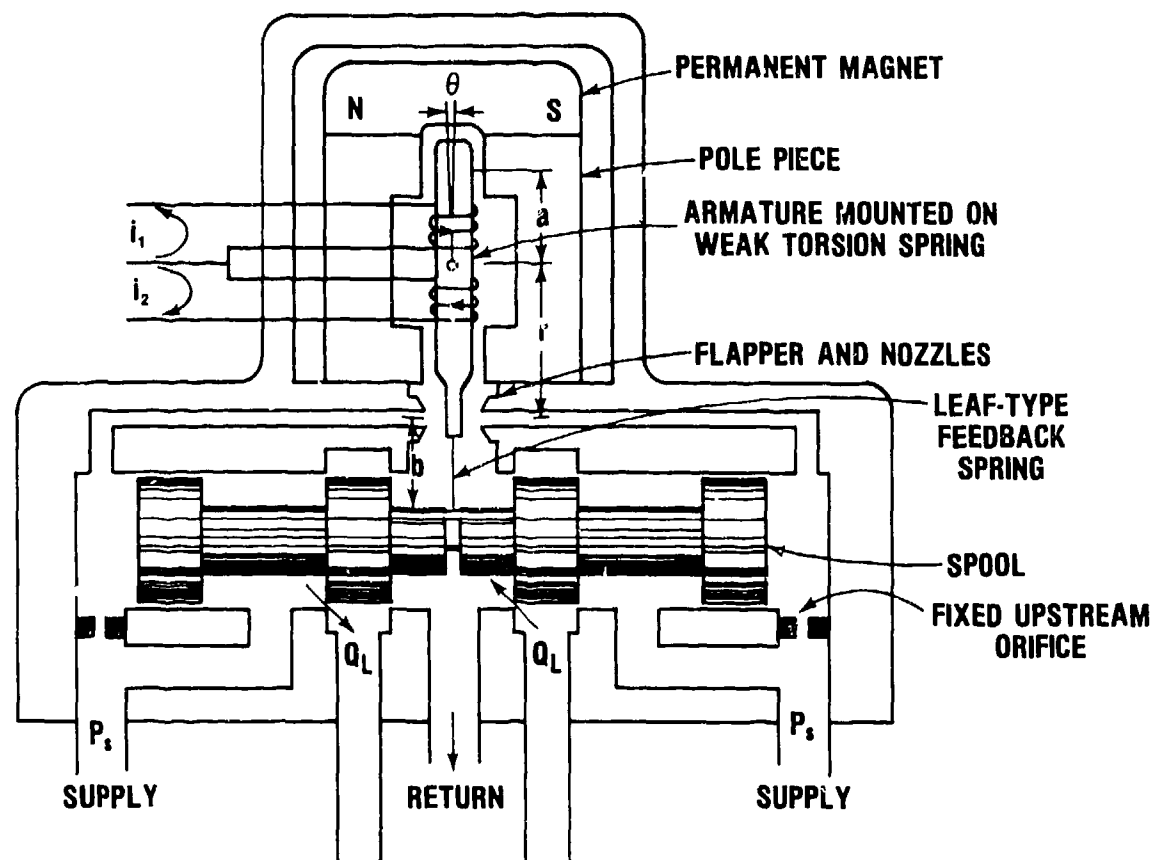


Figure 13. Two-stage, flow-control electrohydraulic servovalve with mechanical feedback. (Schematic from H. B. Merritt, John Wiley and Sons, 1967.)

Direct position and mechanical spring position feedback are similar in that both provide a closed loop, position control servovalve. A two-stage closed loop servovalve is desirable because it allows for the best overall servovalve control. Two of the fluidic servovalves described in section 2 are two-stage, closed loop servovalves (see fig. 3 and 4), which have fluidic resistor feedback circuits. The difficulty with this feedback technique is feedback circuit temperature sensitivity. Spring position feedback has had the

greatest impact on servovalve development--and by far the widest use,^{4,15,16} therefore, only spring position feedback will be discussed. Spring position feedback (fig. 13) has been fully described.⁸ Its advantage is that much larger spool driving pressures (or forces) are available to drive the spool than are required. There is essentially no pressure drop across the spool, so that spool position is controlled by spool drive flow.¹⁶ Using spring feedback, the required spool drive pressure flow point will generally be to the left of the intersection of the fluidic amplifier and hydraulic amplifier curves (fig. 11), so that a fluidic amplifier first stage could provide greater output power (higher overall servovalve frequency response) than a first-stage hydraulic amplifier. Needless to say, mechanical spring position feedback cannot be used with fluidic amplifiers as such, because fluidic amplifiers with no moving parts cannot accept mechanical inputs. However, in order to take advantage of the potential offered by first-stage fluidic amplifiers and second-stage spool valves with mechanical feedback, fluidic-type amplifiers with moving parts have been developed (fig. 14, 15, and 16). The amplifier shown in figure 14 is called an electrofluidic transducer or pin amplifier.¹⁷ The amplifier mechanism is the mechanical deflection of the supply jet by the pin so that a differential pressure is developed at the receiver ports.

The amplifier shown in figure 15 is called a fluidic deflector-jet amplifier.¹⁸ The amplifier mechanism is the mechanical deflection of the supply jet by the deflector such that a differential pressure is developed at the receiver ports. The amplifier shown in figure 16 is

⁴M. Guillon, *Hydraulic Servo Systems Analysis and Design*, Plenum Press, New York (1969).

⁸H. E. Merritt, *Hydraulic Control Systems*, John Wiley and Sons (1967).

¹⁵D. C. Clark, *Electronic Controls for Fluid Power, Hydraulics and Pneumatics* (June 1978).

¹⁶W. J. Thayer, *Transfer Functions for Moog Servovalves*, Moog Technical Bulletin 103, Moog, Inc., Proner Airport, East Aurora, New York (December 1958, Revised January 1965).

¹⁷W. T. Harvey and J. W. Merritt, *Electrofluidic Transducer (Pin Amplifier)*, U.S. Patent No. 3,638,671 (February 1972).

¹⁸Moog Catalog, No. 261, Moog Inc., Proner Airport, East Aurora, New York (n.d.).

called an electro-fluidic transducer or amplifier.¹⁹ The amplifier mechanism is the deflection of the supply nozzle such that the jet emanating from the nozzle develops a differential pressure at the receiver ports. This amplifier is very similar to the jet pipe valve.⁵ Each of these amplifiers is electrically actuated by a torque motor and has been used as the first stage in two-stage electrohydraulic servovalves.^{18,19} Two of the servovalves are shown in figures 17 and 18. The two-stage servovalve shown in figure 17 has a first-stage torque motor with a fluidic deflector-jet amplifier and a second-stage spool valve with mechanical feedback. This is a two-stage, closed loop servovalve. The two-stage servovalve shown in figure 18 has a first-stage torque motor and electro-fluidic amplifier and a second-stage spool valve with electrical feedback. This is a two-stage, closed loop servovalve. The use of fluidic-type amplifiers in these electrohydraulic servovalves attests to the important role fluidic elements play in the present commercial servovalve market. These fluidic applications also point to their potential for increased usage in future commercial applications where reliability will be a vital aspect of system design.

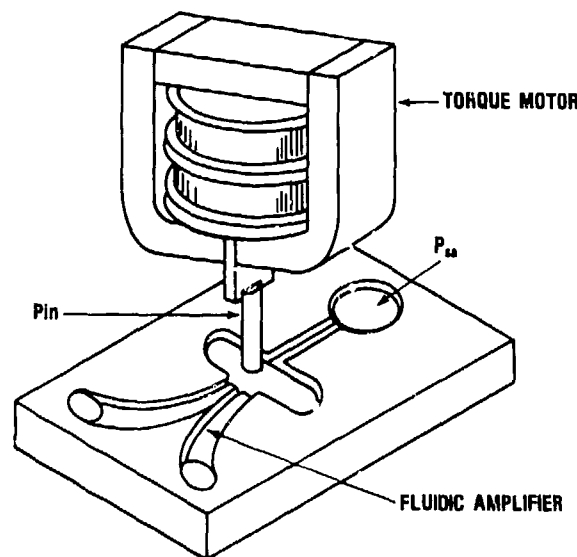


Figure 14. AiResearch Electrofluidic transducer or amplifier.

⁵J. F. Blackburn et al, *Fluid Power Control*, MIT Press and John Wiley and Sons (1960).

¹⁸Moog Catalog, No. 261, Moog Inc., Priner Airport, East Aurora, New York (n.d.).

¹⁹Robert Bosch Corporation, *Electro-hydraulic Servovalve Series 0814-SNV2 and 0814-SMV3*, 2800 South 25th Ave., Broadview, ILL (n.d.).

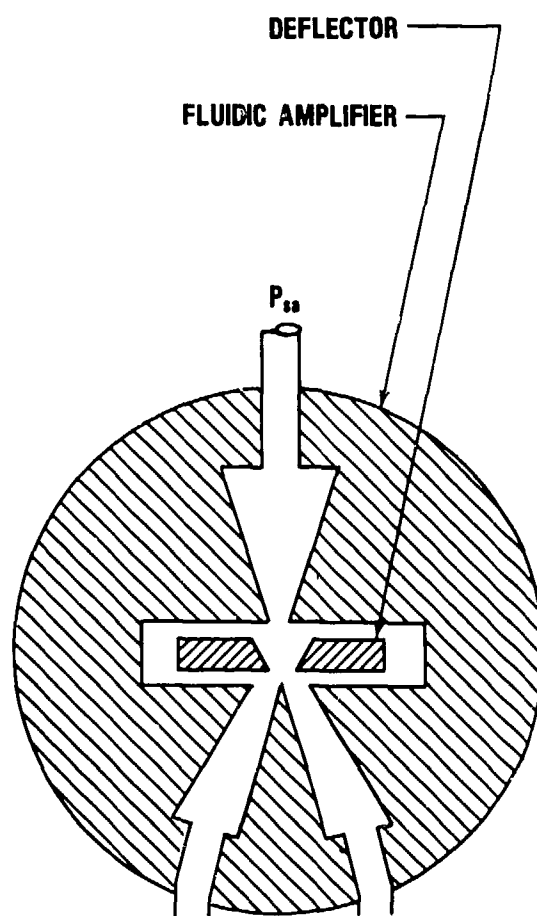
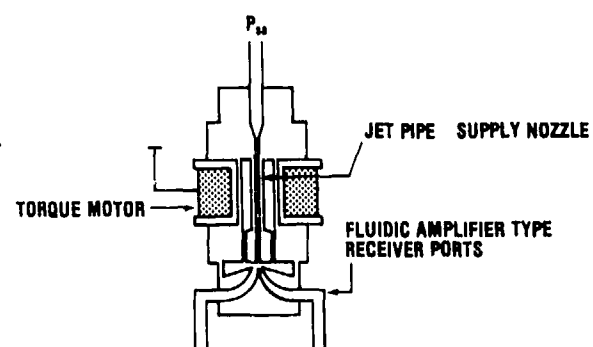


Figure 15. Moog deflector jet fluidic amplifier.

Figure 16. Bosch electrofluidic converter or amplifier (jet pipe).



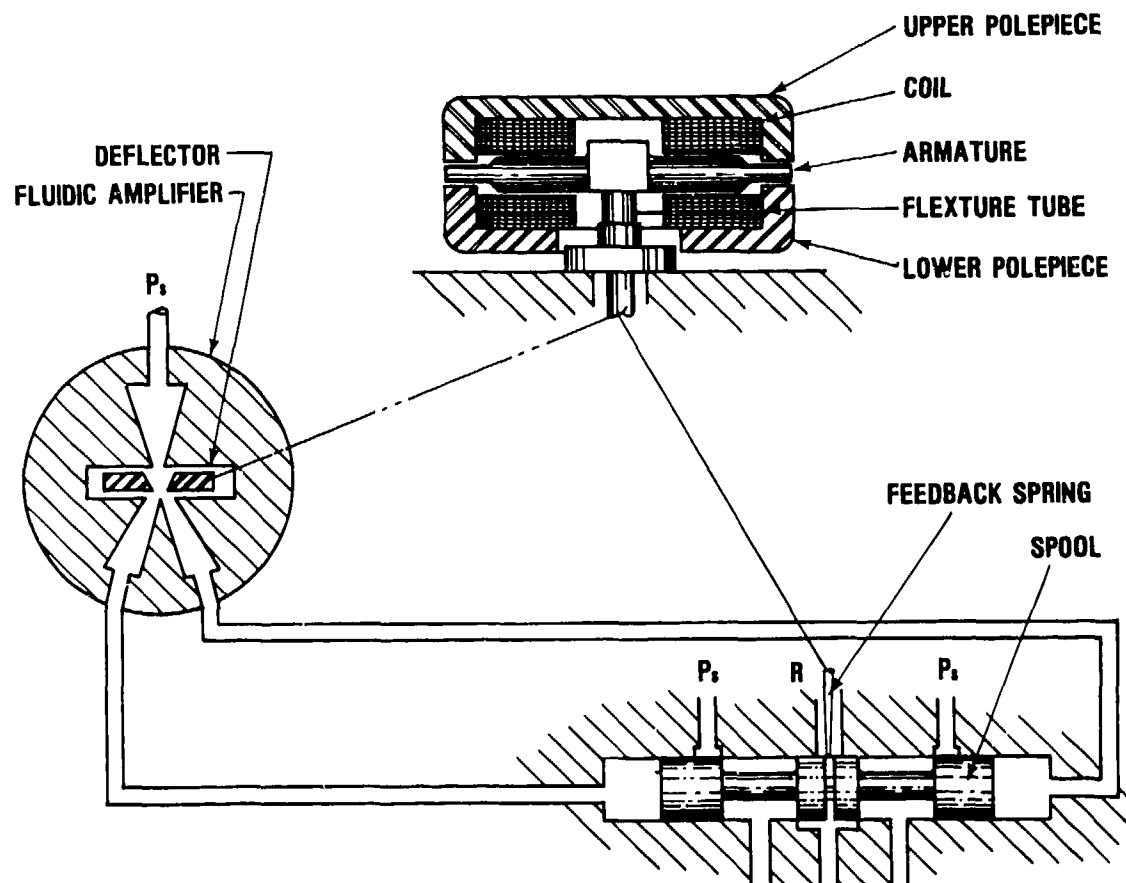


Figure 17. Two-stage, flow control electrohydraulic servovalve with mechanical feedback.

The two-stage servovalves shown in figures 17 and 18 have the best fluidic servovalve configuration. They have closed loop feedback control, which ensures the best overall servovalve control, the minimum number of fluidic amplifiers in the first stage (less parallel staging required) and a feedback technique that is relatively temperature insensitive, as indicated by servovalve specifications.^{18,19} A two-stage fluidic-input servovalve can be developed that employs this configuration. It requires the development of an efficient pure fluid means of moving the pin, the deflector, or the nozzle in the moving-part fluidic-type amplifiers described in figures 14, 15, and 16.

¹⁸Moog Catalog, No. 261, Moog Inc., Proner Airport, East Aurora, New York (n.d.)

¹⁹Robert Bosch Corporation, Electro-hydraulic Servovalve Series 0814-SMV2 and 0814-SMV3, 2800 South 25th Ave., Broadview, ILL (n.d.).

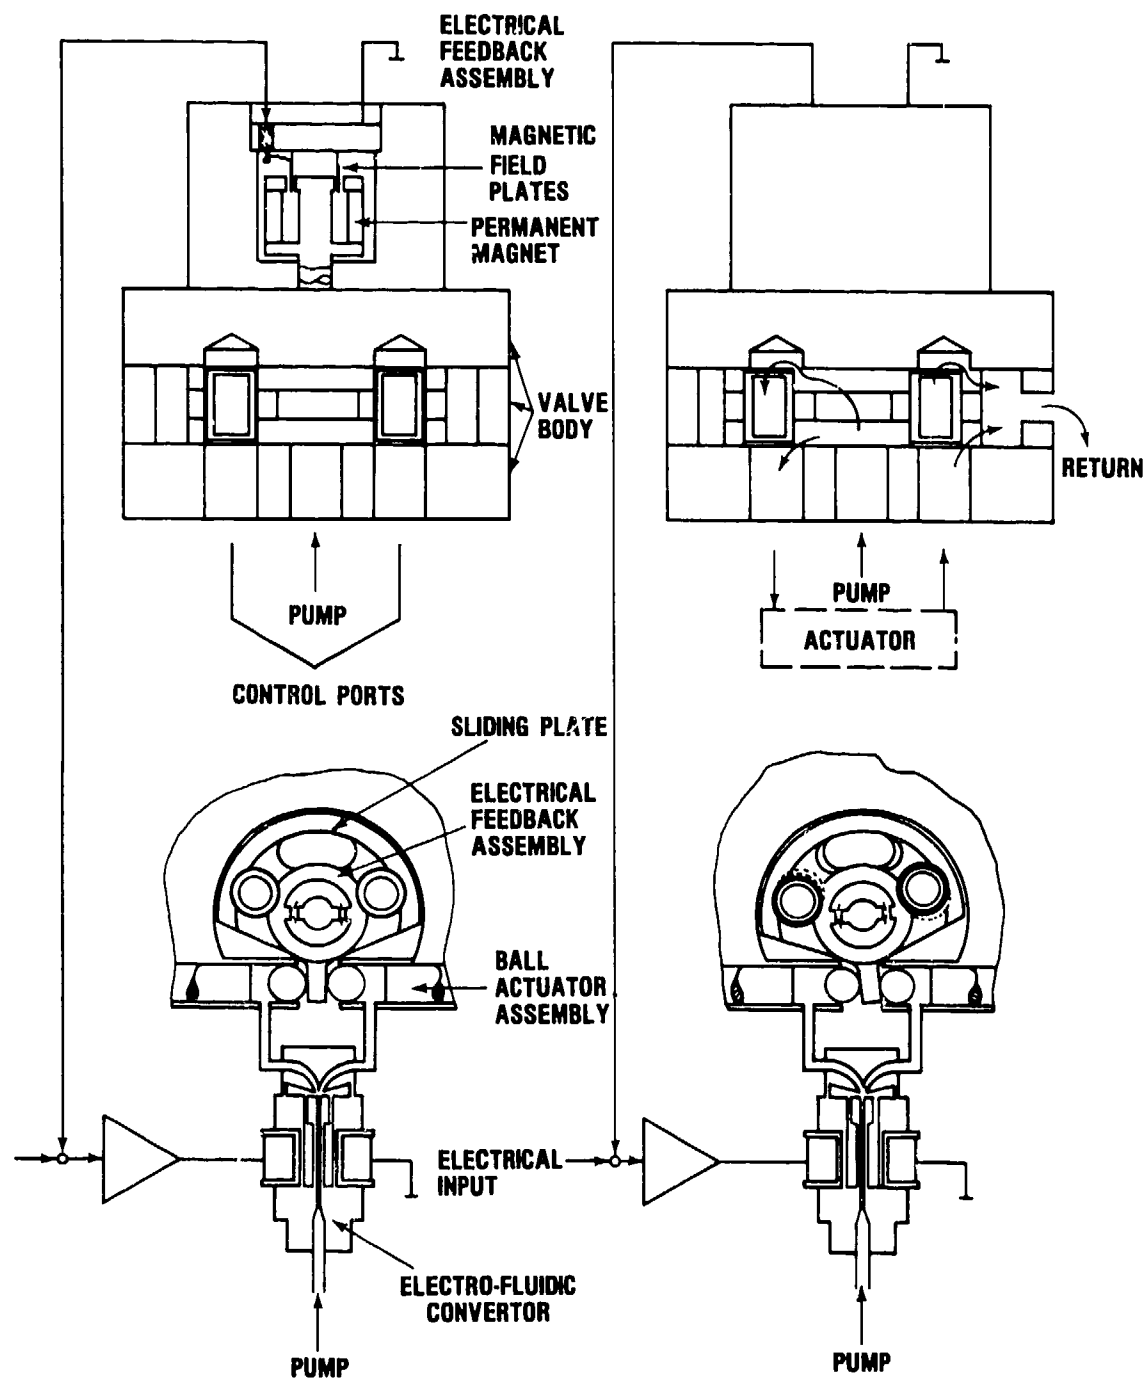


Figure 18. Two-stage, flow-control electrohydraulic servovalve with electrical feedback.

4.4 Leakage Flow

Tare flow for a first-stage fluidic amplifier cascade, Q_e , is the sum of the supply flows for each amplifier in the cascade. It is given as

$$Q_e' = \sum_{i=1}^j b_i g_i \sqrt{P_i} + b_2 g_2 \sqrt{P_2} + \dots + b_j g_j \sqrt{P_j} \quad , \quad (22)$$

where P_i = amplifier supply pressure for the i th stage, Pa

$$g_i = C_{Di} A_i \sqrt{\frac{2}{\rho}}, \text{ m}^7/\text{kg} \quad .$$

C_{Di} = supply nozzle discharge coefficient of the i th stage,
 A_i = supply nozzle area of the i th stage, m^2 , and
 b_i = number of parallel sections in the i th stage.

In general, fluid amplifier leakage flow is greater than a comparable flapper-nozzle valve, even if only one amplifier were used, because its power nozzle area is normally greater than the flapper orifice area. Thus,

$$Q_e' = 2.08 g_f \sqrt{P_s} > Q_e = \sqrt{2} g_f \sqrt{P_s} \quad , \quad (23)$$

where

$C_{Da} = C_D$. The minimum first-stage fluidic amplifier leakage flow is typically 65 percent of the rated or no-load servovalve output flow.

4.5 Temperature Sensitivity

Fluidic amplifiers have gain and null temperature sensitivity as noted in section 2. The gain sensitivity of a first-stage fluidic amplifier cascade can be reduced by using the minimum number of amplifiers in the cascade. In addition, a number of temperature-compensation techniques^{20,21} have been developed to reduce amplifier

²⁰G. Mon and H. Robinson, *Temperature Compensation of Laminar Proportional Amplifiers Using A Linear Resistor Bypass*, Harry Diamond Laboratories, HDL-TM-78-16 (September 1978).

²¹W. M. Posingies, *Advanced Fluidic Temperature Studies*, Honeywell, Inc., St. Louis Park, MN, United States Army Research and Technology Laboratories TR-78-33 (October 1978).

gain and null temperature sensitivity. However, most of these techniques reduce amplifier temperature sensitivity at the expense of higher leakage flow. First-stage fluidic amplifiers operating in the turbulent regime and moving-part fluidic amplifiers appear to be relatively temperature insensitive.

4.6 Reliability

Fluidic systems have a proven record of reliability as a result of operational suitability demonstrations¹¹ and commercial applications.²² The key element in fluidic systems is the fluid amplifier. Its supply nozzle area is relatively large (compared to the flapper-nozzle orifice areas); therefore, it can operate with relatively high levels of fluid contamination. Moreover, if the supply nozzle should suddenly become blocked due to large-particle contamination, then the amplifier will fail neutrally; that is, neither amplifier output port will be driven to saturation. The control nozzle area may also be blocked due to large-particle contamination. A sudden blockage of one of the control nozzles will cause one of the output ports to be driven to saturation. The sudden blockage of an output port will lead to the same problem. However, the control nozzle areas and output port areas are usually larger than the supply nozzle area. Therefore, the probability of failures due to control nozzle and output port blockage is low. These facts increase the reliability of fluidic systems and reduce system filtration requirements.

Finally, the use of a first-stage fluidic amplifier will minimize the probability of actuator hardover, as described in section 3.6, because (1) the torque motor (with its potential failure mode due to electrical short circuits) has been eliminated and (2) the fluidic amplifier will generally fail neutrally.

5. COMPARISON BETWEEN FIRST-STAGE HYDRAULIC AMPLIFIERS AND FLUIDIC AMPLIFIERS

The first-stage hydraulic amplifier and the first-stage fluidic amplifier will be compared in terms of input signal power, output power, frequency response, leakage flow, and temperature sensitivity. A summary statement concerning the usefulness of first-stage fluidic amplifiers is also given.

¹¹L. J. Banaszak and W. M. Posingies, *Hydrofluidic Stability Augmentation System (HYSAS) Operational Suitability Demonstration, United Army Air Mobility Research and Development Laboratory TR-77-31 (October 1977)*.

²²W. T. Fleming and H. R. Gamble, *Reliability Data for Fluidic Systems, AiResearch Manufacturing Co., Phoenix, AZ, Harry Diamond Laboratories HDL-CR-78-092-1 (December 1976)*.

5.1 Input Signal Power

Both the first-stage hydraulic amplifier and the fluidic amplifier can operate with input signal levels in the 100-mW range.

5.2 Output Power

The output power available from the flapper-nozzle valve and from the fluidic amplifier are comparable; one can be greater than the other over a portion of the output range or over the complete range, depending on the relative geometries and supply pressures. Figure 19 contains output characteristics for nominal geometries and various fluidic amplifier supply pressures.

5.3 Frequency Response

The dynamics of both the hydraulic amplifier and the fluidic amplifier are small compared to the overall dynamics of two-stage servovalves. These first-stage elements determine overall servovalve response primarily by the amount of output power they provide to drive or control the second-stage spool. The output power of both these elements is comparable; however, the hydraulic amplifier has higher pressure recovery or available output pressure. This is an important difference if the second stage is a spring-centered spool valve (and it must be if the first stage is a fluidic amplifier with no moving parts), because this type of second stage requires high spool driving pressures. Since the hydraulic amplifier has high output pressure, it has more output power to drive the second-stage spring-centered spool valve over its maximum range to get rated servovalve output flow. Comparable response can be obtained with a first-stage fluidic amplifier by using additional amplifiers in parallel.

5.4 Leakage Flow

First-stage fluidic amplifiers will have higher leakage flow than first-stage hydraulic amplifiers because (1) the fluidic amplifier has a supply nozzle area that is generally larger than the hydraulic amplifier orifice area and (2) more than one fluidic amplifier stage will generally be required. First-stage fluidic amplifier leakage flow is typically a minimum of 5 to 6 times greater than a comparable first-stage hydraulic amplifier.

5.5 Temperature Sensitivity

First-stage hydraulic amplifiers are less temperature sensitive than first-stage fluidic amplifiers. A fluidic amplifier cascade operated in the laminar regime must be temperature compensated to prevent gain and null changes with fluid temperature variations.

However, recent studies indicate that a first-stage fluidic amplifier cascade of no more than four amplifiers operated in the turbulent regime may have temperature sensitivity comparable to the hydraulic amplifier and not require temperature compensation. Moving-part fluidic amplifiers also have temperature sensitivity comparable to hydraulic amplifiers.

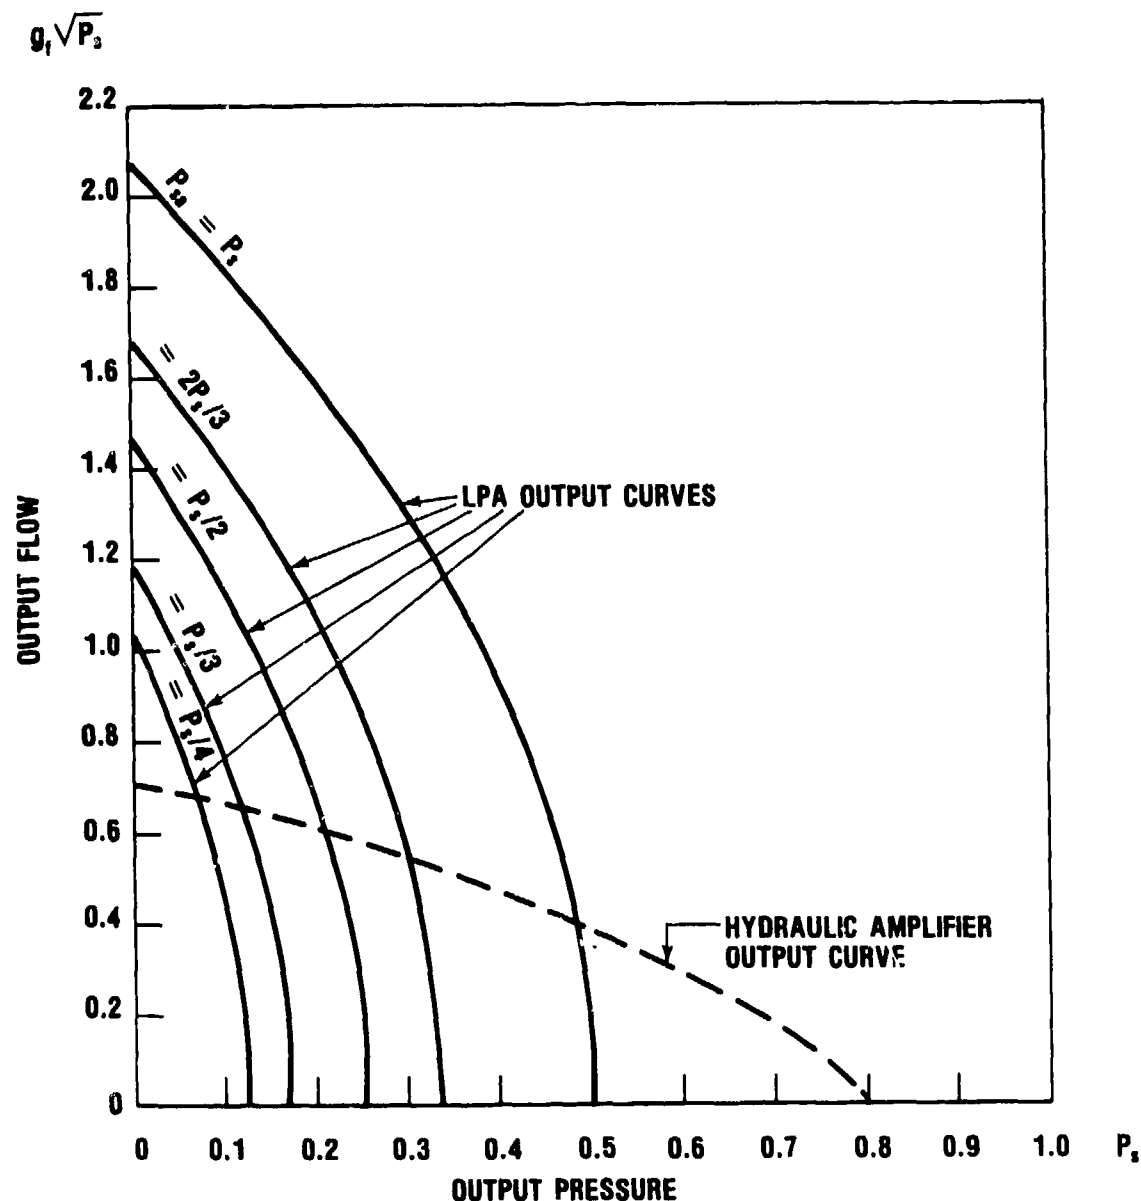


Figure 19. Output characteristics of hydraulic amplifier with supply pressure P_s and laminar proportional amplifiers with various supply pressures P_{sa} .

5.6 Reliability

First-stage fluidic amplifiers are more reliable than first-stage hydraulic amplifiers in terms of minimizing the probability of actuator hardover failures. Actuator hardover failure is minimized with the first-stage fluidic amplifier because (1) the electrical torque motor (which can develop short circuits and cause actuator hardover) has been eliminated, (2) the minimum clearance areas of the fluidic amplifier are generally larger than those of the hydraulic amplifier, and (3) should a sudden blockage occur in the fluidic amplifier, it will probably fail neutrally.

5.7 Summary

The first-stage fluidic amplifier is comparable to the hydraulic amplifier in terms of input power level, output power, and frequency response. The hydraulic amplifier has less leakage flow and is less temperature sensitive. However, the fluidic amplifier is more reliable in terms of failure modes which can cause actuator hardover and in its ability to operate with higher levels of fluid contamination. In many applications, the increased reliability offered by fluidic amplifiers more than offsets the disadvantage of additional leakage flow. The problem of fluidic amplifier gain and null temperature sensitivity may be overcome by (1) temperature compensation of fluidic amplifiers operated in the laminar regime, (2) operating the fluidic amplifiers in the turbulent regime, and (3) the use of moving-part fluidic amplifiers whose gain and null characteristics are relatively temperature insensitive. The use of moving-part fluidic amplifiers makes it possible to use mechanical feedback from the second-stage spool. This in turn reduces the number of fluidic amplifiers needed in the first-stage cascade and thus reduces first-stage temperature sensitivity and leakage flow.

Two-stage servovalves using first-stage fluidic amplifiers can operate in high shock and vibration environments and with high levels of fluid contamination. These advantages more than justify continued development of first-stage fluidic amplifiers with and without moving parts.

6. TRENDS IN FLUIDIC SERVOVALVE DEVELOPMENT

As stated in the previous sections, development of two-stage fluidic input servovalves has been aimed at improved servovalve response, leakage flow, reliability, and cost. However, the development of microprocessors in recent years has introduced additional considerations to valve development. First, the availability of low-cost, reliable microprocessors means that most control systems will have some type of

electronic controller. Fluidic systems and subsystems will therefore have to interface with electronic controllers or central processing units. The electronic signal could be converted to a hydraulic signal and summed at the summing junction as another input to the fluidic system. However, since microprocessor signal processing is faster and more accurate, the signal should be introduced at the servovalve--possibly with override capability. This means that fluidic systems and subsystems must have dual input (fluidic, electronic) servovalves.²³ The U.S. Army Research and Technology Laboratories (AVRADCOM) has let a contract to develop this type of servovalve.

A second consideration is the use of microprocessors with fluid power systems. The most tempting use of microprocessors in electrohydraulic systems is to replace the analog or digital summing point and to condition the error information for driving the hydraulic controller.²⁴ Microprocessor-level signals could also be used to drive the low-input-power-level electrohydraulic servovalves with fluidic-type first-stage elements.¹⁹ Moreover, microprocessor-level signals could be converted to hydraulic signals and used to drive fluidic-input, two-stage servovalves.

Finally, fluidic-type amplifiers that have moving parts are successfully being used in commercially available electrohydraulic servovalves as noted in section 4.3. These servovalves have the advantage of high reliability, particularly in high vibration and shock environments, and can operate with low-level input signals.

7. CONCLUSIONS

A review of the developments of two-stage fluidic input servovalves, using a first-stage fluidic amplifier and a second-stage spool valve, indicates that this servovalve configuration is feasible. However, fluidic amplifier gain and null variation with fluid temperature change is a problem.

The first-stage fluidic amplifier is comparable to the hydraulic amplifier in terms of input signal power levels, output power, and frequency response. The hydraulic amplifier has less leakage flow and is less temperature sensitive. However, the fluidic amplifier is more

¹⁹Robert Bosch Corporation, *Electro-hydraulic Servovalve Series 0814-SMV2 and 0814-SMV3*, 2800 South 25th Ave., Broadview, ILL.

²³L. P. Biafore and B. Holland, *Fluidics--Feasibility Study Electro/Hydraulic/Fluidic Direct Drive Servo Valve*, Rockwell International Corp., Columbus, OH, NADC TR-78033-60 (March 1979).

²⁴R. H. Maskrey, *Possible Uses of Microprocessors for Fluid Power, Hydraulics and Pneumatics* (June 1979).

reliable in terms of failure modes which cause actuator hardover and its ability to operate with larger sizes of particulate contamination. In many applications the increased reliability offered by fluidic amplifiers more than offsets the additional leakage flow. The problem of gain and null temperature sensitivity may be overcome by (1) temperature compensation of fluidic amplifiers operated in the laminar regime, (2) operating the fluidic amplifiers in the turbulent regime, and (3) the use of moving-part fluidic amplifiers with gain and null characteristics that are relatively temperature insensitive.

A two-stage fluidic input servovalve with a first-stage, mechanically actuated fluidic-type amplifier and a second-stage spool valve with mechanical feedback is the best fluidic input servovalve configuration. The use of a mechanically actuated fluidic amplifier makes it possible to use mechanical feedback from the second-stage spool valve. (The servovalve thus becomes a closed loop, spool position, control system.) This reduces the number of fluidic amplifiers needed in the first-stage amplifier cascade and thus reduces the first-stage leakage flow and temperature sensitivity. The development of this servovalve configuration awaits the development of an efficient fluid means of moving the mechanical actuator.

The development of microprocessors in recent years has introduced additional considerations to valve development. First, the availability of low-cost, reliable microprocessors means that most control systems will have some type of electronic controller. Fluidic systems and subsystems will therefore have to interface with electronic controllers or central processing units. This means that fluidic systems and subsystems must have dual input (fluidic and electronic) servovalves. A second consideration is the use of very low signal threshold fluidic input servovalves with microprocessors. Microprocessor-level signals could be used to drive existing electrohydraulic servovalves or could be converted to hydraulic fluidic signals and used to drive fluidic input servovalves.

Finally, fluidic-type amplifiers (that is, amplifiers with moving parts) are successfully being used in commercially available electrohydraulic servovalves. These servovalves have the advantage of high reliability, particularly in high shock and vibration environments, and can operate with relatively high levels of fluid contamination.

ACKNOWLEDGEMENT

The author acknowledges the assistance of Dr. George Mon and Mr. John Goto in the formulation and solution, respectively, of the hydraulic amplifier load-flow equation. The author also thanks Dr. Tadeusz Drzewiecki for his thorough review and suggestions concerning the material presented in this paper.

LITERATURE CITED

1. H. C. Kent and J. R. Sjolund, Hydrofluidic Servoactuator Development, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-73-12 (May 1973).
2. J. R. Sjolund, Hydrofluidic Servoactuator Development, Honeywell, Inc., Minneapolis, MN, United States Army Air Mobility Research and Development Laboratory TR-76-25 (September 1976).
3. J. O. Hedeon, Investigation of a Low-Cost Servoactuator for HYSAS, Honeywell, Inc., Minneapolis, MN, United States Army Research and Technology Laboratories TR-78-30 (July 1978).
4. M. Guillon, Hydraulic Servo Systems Analysis and Design, Plenum Press, New York (1969).
5. J. F. Blackburn et al, Fluid Power Control, MIT Press and John Wiley and Sons (1960).
6. W. J. Thayer, Specification Standards for Electrohydraulic Flow Control Servovalves, Moog Technical Bulletin 117, Moog, Inc., Proner Airport, East Aurora, New York (July 1959, Revised June 1962).
7. H. C. Morse, Electrohydraulic Servomechanisms, McGraw-Hill Book Co., New York (1963).
8. H. E. Merritt, Hydraulic Control Systems, John Wiley and Sons (1967).
9. A. Lichtarowicz and E. Markland, Calculation of Potential Flow with Separation in a Right-Angled Elbow with Unequal Branches, J. Fluid Mech., Cambridge University Press, 17, Pt 4 (December 1963).
10. R. H. Maskrey and W. J. Thayer, A Brief History of Electrohydraulic Servomechanisms, American Society of Mechanical Engineering Journal of Dynamic Systems Measurement and Control (June 1978).
11. L. J. Banaszak and W. M. Posingies, Hydrofluidic Stability Augmentation System (HYSAS) Operational Suitability Demonstration, United States Army Air Mobility Research and Development Laboratory TR-77-31 (October 1977).

LITERATURE CITED (Cont'd)

12. D. Lee and D. N. Wormley, Hydraulic Signal-Processing Amplifier Performance in Position Control Systems, Massachusetts Institute of Technology, Cambridge, MA, Harry Diamond Laboratories HDL-CR-77-191-1 (December 1977).
13. J. M. Kirshner, Fluid Amplifiers, McGraw-Hill (1966).
14. R. Deadwyler and F. M. Manion, Design Considerations for Improved Fluidic Input Servovalve Performance, Harry Diamond Laboratories HDL-TM-79-4 (April 1979).
15. D. C. Clark, Electronic Controls for Fluid Power, Hydraulics and Pneumatics (June 1978).
16. W. J. Thayer, Transfer Functions for Moog Servovalves, Moog Technical Bulletin 103, Moog, Inc., Proner Airport, East Aurora, New York (December 1958, Revised January 1965).
17. W. T. Servey and J. W. Merritt, Electrofluidic Transducer (Pin Amplifier). U.S. Patent No. 3,638,671 (February 1972).
18. Moog Catalog, No. 261, Moog Inc., Proner Airport, East Aurora, New York (n.d.).
19. Robert Bosch Corporation, Electro-hydraulic Servovalve Series 0814-SMV2 and 0814-SMV3, 2800 South 25th Ave., Broadview, ILL.
20. G. Mon and H. Robinson, Temperature Compensation of Laminar Proportional Amplifiers Using A Linear Resistor Bypass, Harry Diamond Laboratories, HDL-TM-78-16 (September 1978).
21. W. M. Posingies, Advanced Fluidic Temperature Studies, Honeywell, Inc., St. Louis Park, MN, United States Army Research and Technology Laboratories TR-78-33 (October 1978).
22. W. T. Fleming and H. R. Gamble, Reliability Data for Fluidic Systems, AiResearch Manufacturing Co., Phoenix, AZ, Harry Diamond Laboratories HDL-CR-78-092-1 (December 1976).
23. L. P. Biafore and B. Holland, Fluidics--Feasibility Study Electro/Hydraulic/Fluidic Direct Drive Servo Valve, Rockwell International Corp., Columbus, OH, NADC TR-78033-60 (March 1979).
24. R. H. Maskrey, Possible Uses of Microprocessors for Fluid Power, Hydraulics and Pneumatics (June 1979).

APPENDIX A--TWO-STAGE FLUIDIC SERVOVALVE
RESEARCH AND DEVELOPMENT

A literature search was initiated in connection with this study. The search revealed research and development studies of the following two-stage fluidic servovalve configurations.

APPENDIX A.--TWO-STAGE FLUIDIC INPUT SERVOVALVE RESEARCH AND DEVELOPMENT

Reference No.	Servovalve configuration		Sponsor ^a	Date
	First stage	Second stage		
1	Bellows, flapper-nozzle valve	Spool valve	NADC (Honeywell, Moog)	1962
2	Venjet amplifiers, Vortex amplifiers	Vortex amplifiers	NASA (Bendix)	1965
3	Venjet amplifiers, Vortex amplifiers	Vortex amplifiers	NASA (Bendix)	1968
4	Bellows, flapper-nozzle valve	Vortex valves	AMRDL (GE)	1969
5	Bellows, flapper-nozzle valve, amplifier cascade	Spool valve	AFFDL (GE)	1970
6	Bellows, flapper-nozzle valve	Vortex valves	AMRDL (GE)	1970
7	Bellows, flapper-nozzle valve	Spool valve	AMRDL (Honeywell)	1971
	Bellows, flapper-nozzle valve	Vortex valves	AMRDL (Honeywell)	1971
8	Fluidic amplifier cascade	Spool valve	AMRDL (Honeywell)	1973
9	Bellows, flapper-nozzle valve	Spool valve	NADC (Honeywell Moog)	1974
10	Bellows, flapper-nozzle valve	Spool valve	AFFDL (Honeywell)	1975
11	Bellows, flapper-nozzle valve	Poppet valves	AMRDL (Honeywell)	1975
12	Fluidic amplifier cascade	Spool valve	AMRDL (Honeywell)	1976
13	Fluidic amplifier bellows, flapper-nozzle valve	Spool valve	HDL (MIT)	1976

APPENDIX A.--TWO-STAGE FLUIDIC INPUT SERVOVALVE RESEARCH AND
DEVELOPMENT (Cont'd)

Reference No.	Servovalve configuration		Sponsor ^a	Date
	First stage	Second stage		
14	Bellows, flapper-nozzle valve	Spool valve	AMRDL (Honeywell)	1977
15	Fluidic amplifier; bellows, flapper-nozzle valve	Spool valve	HDL (MIT)	1977
16	Fluidic amplifier cascade	Spool valve	AMRDL (Honeywell)	1978
17	Fluidic amplifier; bellows, flapper-nozzle valve	Spool valve	HDL	1979
18	Fluidic amplifier cascade	Spool valve	HDL (MIT)	In progress

^aAFFDL: United States Air Force Flight Dynamics Laboratory.

AMRDL: United States Army Air Mobility Research and Development Laboratory.

NADC: United States Naval Air Development Center.

NASA: National Aeronautics and Space Administration.

HDL(MIT): Harry Diamond Laboratories (Massachusetts Institute of Technology).

REFERENCES TO APPENDIX A

1. Naval Air Development Center Hydrofluidic Servovalve Development/Study, J. Stegner and R. Maskrey (1962).
2. Design, Fabrication and Test of a Fluid Interaction Servovalve, M. N. Cardon, National Aeronautics and Space Administration CR-54463 (May 1965).
3. Design, Fabrication and Test of a Flueric Servovalve, C. E. Vos, National Aeronautics and Space Administration CR-72388 (February 1968).
4. Fluidic Vortex Valve Servoactuator Development, T. S. Honda and F. S. Ralbovsky, United States Army Aviation Material Laboratories TR-69-23 (May 1969).
5. Research and Development on a Fluidic Servoactuator, J. R. Granan, United States Air Force Flight Dynamics Laboratory TR-70-23 (July 1970).

REFERENCES TO APPENDIX A

6. Fluidic Servoactuators for Three-Axis Fluidic Stability Augmentation System, T. S. Honda, United States Army Aviation Material Laboratories TR-70-52 (September 1970).
7. A Three-Axis Fluidic Stability Augmentation System, H. D. Ogren United States Army Air Mobility Research and Development Laboratory TR-71-30 (October 1971).
8. Hydrofluidic Servoactuator Development, J. C. Kent and J. R. Sjolund, United States Army Air Mobility Research and Development Laboratory TR-73-12 (May 1973).
9. Advanced Hydrofluidic Servovalve, J. Stegner and R. Maskrey, Honeywell Doc. No.-W0562-FR, U.S. Navy Air Development Center (December 1974).
10. Development of a Hydrofluidic Stabilization Augmentation System (HYSAS) for an AX Class Aircraft, H. C. Kent, United States Air Force Flight Dynamics Laboratory TR-74-147 (January 1975).
11. Hydrofluidic Servovalve Development, H. C. Kent, United States Army Air Mobility Research and Development Laboratory TR-75-21 (June 1975).
12. Hydrofluidic Servoactuator Development, R. Sjolund, United States Army Air Mobility Research and Development Laboratory TR-76-25 (September 1975).
13. Multistage Hydraulic Summing and Signal Processing Amplifiers and Fluidic Input Servovalve Development, David Lee and D. N. Wormley, Harry Diamond Laboratories, HDL-CR-76-223-1 (October 1976).
14. Hydrofluidic Stability Augmentation System (HYSAS) Operational Suitability Demonstration, L. J. Banaszak and W. M. Posingies, United States Army Air Mobility Research and Development Laboratory TR-77-31 (October 1977).
15. Hydraulic Signal-Processing Amplifier Performance in Position Control Systems, David Lee and D. N. Wormley, Harry Diamond Laboratories, HDL-CR-77-191-1 (December 1977).
16. Investigation of Low-Cost Servoactuator for HYSAS, J. O. Hedeem, United States Army Research and Technology Laboratories TR-78-30 (July 1978).

REFERENCES TO APPENDIX A

17. Design Consideration for Improved Fluidic Input Servovalve Performance, R. Deadwyler and F. Manion, HDL-TM-79-4 (April 1979).
18. Personal Communication with Dr. D. Wormley of Department of Mechanical Engineering, Massachusetts Institute of Technology (January 1979).

NOMENCLATURE

A_1	fluidic amplifier supply nozzle area for the i th stage, m^2
A_s	spool end area, m^2
A_{sa}	fluidic amplifier supply nozzle area ($b_s \cdot h$), m^2
b_i	number of parallel sections in the i th stage of a fluidic amplifier cascade
b_s	fluidic amplifier supply nozzle width, m
C_D	hydraulic amplifier (flapper) fixed orifice discharge coefficient
C_{Da}	fluidic amplifier supply nozzle discharge coefficient
C_{Df}	hydraulic amplifier, flapper-nozzle curtain area discharge coefficient
C_{Di}	fluidic amplifier supply nozzle discharge coefficient for the i th stage
D	flapper fixed orifice diameter, m
D_N	flapper-nozzle orifice diameter, m
f	frequency, 1/s (Hz)
g_a	$C_{Da} A_{sa} \sqrt{2/\rho}$, fluidic amplifier supply flow coefficient
G_A	maximum fluidic amplifier power gain, watts/watts
g_f	$C_D (\pi/4) D^2 \sqrt{2/\rho}$, flapper-nozzle orifice flow coefficient, $\sqrt{m^7/kg}$
G_F	maximum hydraulic amplifier power gain, watts/watts
g_i	$C_{Di} A_i \sqrt{2/\rho}$, fluidic amplifier supply flow coefficient for the i th stage, $\sqrt{m^7/kg}$
h	fluidic amplifier supply nozzle height, m
i	summation index, number of the individual stage of a fluidic amplifier cascade
j	total number of stages of the fluidic amplifier cascade
K_A	hydraulic amplifier gain constant, $m^5/N \cdot s$
P_m	nondimensional hydraulic amplifier output pressure, p_m/P_s
P_n	nondimensional fluidic amplifier output pressure, p_n/P_{sa}
P_s	hydraulic amplifier (flapper) supply pressure, Pa
P_{sa}	fluidic amplifier supply pressure, Pa
p_m	actual hydraulic amplifier output pressure, Pa
p_n	actual fluidic amplifier output pressure, Pa

NOMENCLATURE (Cont'd)

Q_e	hydraulic amplifier leakage or tare flow, m^3/s
Q_e^1	fluidic amplifier leakage or tare flow, m^3/s
Q_F	maximum hydraulic amplifier output flow, m^3/s
Q_i	fluidic amplifier supply flow for the i th stage, m^3/s
Q_m	nondimensional hydraulic amplifier output flow
Q_n	nondimensional fluidic amplifier output flow, q_n/Q_{sa}
Q_P	spool valve drive flow, m^3/s
Q_{sa}	fluidic amplifier supply flow, m^3/s
q_m	actual hydraulic amplifier output flow, m^3/s
q_n	actual fluidic amplifier output flow, m^3/s
s	Laplace Transform variable, $1/s$ (Hz)
T	hydraulic amplifier transfer function, $m^5/N \cdot s$
W	nondimensional hydraulic amplifier output power, $P_m Q_m$
W^1	nondimensional fluidic amplifier output power, $P_n Q_n$
W_O	maximum hydraulic amplifier output power, watts
W_{IO}	maximum fluidic amplifier output power, watts
W_I	input signal power to the hydraulic amplifier, watts
W_I	input signal power to the fluidic amplifier, watts
x_s	maximum spool displacement, m
ξ	flapper-nozzle valve damping ratio
ρ	fluid density, kg/m^3
τ_m	torque motor time constant, s
ψ	H_0/H_0
ω_n	$2\pi f$, $1/s$ (Hz)
ω	flapper-nozzle valve natural frequency

DISTRIBUTION

ADMINISTRATOR
DEFENSE DOCUMENTATION CENTER
ATTN DDC-TCA (12 COPIES)
CAMERON STATION, BUILDING 5
ALEXANDRIA, VA 22314

COMMANDER
US ARMY RSCH & STD GP (EUR)
ATTN LTC JAMES M. KENNEDY, JR.
CHIEF, PHYSICS & MATH BRANCH
FPO NEW YORK 09510

COMMANDER
US ARMY MATERIAL DEVELOPMENT &
READINESS COMMAND
ATTN DRXAM-TL, HQ TECH LIBRARY
ATTN DRCRD-TP
5001 EISENHOWER AVENUE
ALEXANDRIA, VA 22333

COMMANDER
US ARMY ARMAMENT MATERIEL
READINESS COMMAND
ATTN DRSAR-ASF, FUZE &
MUNITIONS SUPPORT DIV
ATTN DRSAR-RDF, SYS DEV DIV-FUZES
ATTN DRSAR-RDG-T, R. SPENCER
ATTN DRSAR-ASF
ATTN DRSAR-LEP-L, TECH LIBRARY
ROCK ISLAND, IL 61299

COMMANDER
US ARMY MISSILE & MUNITIONS
CENTER & SCHOOL
ATTN ATSK-CTD-F
REDSTONE ARSENAL, AL 35809

DIRECTOR
US ARMY MATERIEL SYSTEMS ANALYSIS ACTIVITY
ATTN DRXSY-MP
ABERDEEN PROVING GROUND, MD 21005

DIRECTOR
US ARMY BALLISTIC RESEARCH LABORATORY
ATTN DRDAR-TSB-S (STINFO)
ABERDEEN PROVING GROUND, MD 21005

US ARMY ELECTRONICS TECHNOLOGY
AND DEVICES LABORATORY
ATTN DELFT-DD
FORT MONMOUTH, NJ 07703

TELEDYNE BROWN ENGINEERING
CUMMINGS RESEARCH PARK
ATTN MELVIN L. PRICE, MS-44
HUNTSVILLE, AL 35807

COMMANDER IDDR&E
PENTAGON, ROOM 3D 1089
ATTN G. KOPCSAK
WASHINGTON, DC 20310

OFFICE OF THE DEPUTY CHIEF OF STAFF FOR
RESEARCH, DEVELOPMENT & ACQUISITION
DEPARTMENT OF THE ARMY
ATTN DAMA-ARP-P
ATTN DAMA-CSS
WASHINGTON, DC 20310

US ARMY R&D GROUP (EUROPE)
BOX 15
ATTN CHIEF, AERONAUTICS BRANCH
ATTN CHIEF, ENGINEERING SCIENCES
FPO NEW YORK 09510

US ARMY RESEARCH OFFICE
ATTN R. SINGLETON
P. O. BOX 12211
RESEARCH TRIANGLE PARK, NC 27709

BMD ADVANCED TECHNOLOGY CENTER
ATTN J. PAPADOPOULOS
P.O. BOX 1500
HUNTSVILLE, AL 35807

COMMANDER
US ARMY FOREIGN SCIENCE & TECHNOLOGY CTR
FEDERAL OFFICE BUILDING
ATTN DRXST-SD1
ATTN DRXST-183, C. R. MOORE
220 7TH STREET, NE
CHARLOTTESVILLE, VA 22901

DIRECTOR
APPLIED TECHNOLOGY LABORATORY
ATTN GEORGE W. FOSDICK, DAVDL-ATL-ASA
FORT EUSTIS, VA 23604

COMMANDER
USA MISSILE COMMAND
ATTN REDSTONE SCIENTIFIC INFORMATION
CENTER, DRSMI-RBD
ATTN DRDMI-TGC, WILLIAM GRIFFITH
ATTN DRDMI-TGC, J. C. DUNAWAY
ATTN DRCPM-TOE, FRED J. CHEPLEN
REDSTONE ARSENAL, AL 35809

COMMANDER
US ARMY MOBILITY EQUIPMENT R&D CENTER
ATTN TECHNICAL LIBRARY (VAULT)
ATTN DRDME-EM, R. N. WARE
FORT BELVOIR, VA 22060

COMMANDER
EDGEWOOD ARSENAL
ATTN SAREA-MT-T, D. PATTON
ABERDEEN PROVING GROUND, MD 21010

COMMANDER
US ARMY ARRADCOM
ATTN SARPA-TS-S #59
ATTN DRDAR-LCN-C, A. E. SCHMIDLIN
ATTN DRDAR-LCW-E, J. CONNORS
ATTN MICHAEL BACCCELLIERI
ATTN PBM-DPM (TAGLAIRINO)
ATTN PBM-MG (A. WILLIAMS)
DOVER, NJ 07801

COMMANDER
WATERSVIET ARSENAL
ATTN SARV-V-RDT-L
ATTN DRDAR-LCB-RA, R. RACICOT
WATERSVIET ARSENAL, NY 12189

COMMANDER
US ARMY TANK AUTOMOTIVE RES & DEV COMMAND
ARMOR & COMP DIV, DRDTA-RKT
ATTN T. KOZOWYK
ATTN A. LAPSYS
BLDG 215
WARREN, MI 48090

COMMANDER
ATTN STEWS-AD-L, TECHNICAL LIBRARY
WHITE SANDS MISSILE RANGE, NM 88002

COMMANDER/DIRECTOR
ATMOSPHERIC SCIENCES LABORATORY
USA ERADCOM
ATTN DELAS-AS (HOLT)
ATTN DELAS-AS-T (R. RUBIO)
WHITE SANDS MISSILE RANGE, NM 88002

OFFICE OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
ATTN STANLEY W. DOROFF, CODE 438
ATTN D. S. SIEGEL, CODE 211
ARLINGTON, VA 22217

DEPARTMENT OF THE NAVY
R&D PLANS DIVISION
ROOM 5D760, PENTAGON
ATTN BENJ R. PETRIE, JR.
OP-987P4
WASHINGTON, DC 20350

COMMANDANT
US NAVAL POSTGRADUATE SCHOOL
DEPARTMENT OF MECHANICAL ENGINEERING
ATTN CODE 69 Mh(NUNN)
MONTEREY, CA 93940

COMMANDER
NAVAL AIR DEVELOPMENT CENTER
ATTN R. MCGIBONEY, 30424
ATTN CODE 8134, LOIS GUISE
ATTN D. KEYSER, 30424
WARMINSTER, PA 18974

COMMANDER OFFICER
NAVAL AIR ENGINEERING CENTER
ATTN ESSD, CODE 9314, HAROLD OTT
LAKEHURST, NY 08733

NAVAL AIR SYSTEMS COMMAND
DEPARTMENT OF THE NAVY
ATTN CODE AIR-5162C1, J. BURNS
ATTN CODE AIR-5162C8, D. HOUCK
WASHINGTON, DC 20360

COMMANDER
PACIFIC MISSILE RANGE
NAVAL MISSILE CENTER
ATTN CODE 3123, ABE J. GARRETT
ATTN CODE 1243, A. ANDERSON
POINT MUGU, CA 93042

COMMANDER
NAVAL SHIP ENGINEERING CENTER
PHILADELPHIA DIVISION
ATTN CODE 6772
PHILADELPHIA, PA 19112

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN CODE 413, CLAYTON MCKINDRA
ATTN CODE G-4, T. O'CONNOR
WHITE OAK, MD 20910

COMMANDER
NAVAL ORDNANCE STATION
ATTN CODE 5123C, K. ENGLANDER
INDIANHEAD, MD 20640

NAVAL SHIP RES & DEV CENTER
CODE 1619, K. READER
BETHESDA, MD 20084

DISTRIBUTION (Cont'd)

NAVAL SEA SYSTEMS COMMAND
SEA0331H
ATTN A. CHAIKIN
WASHINGTON, DC 20362

COMMANDER
NAVAL WEAPONS CENTER
ATTN CODE 533, LIBRARY DIVISION
ATTN CODE 3636, C. BURMEISTER
CHINA LAKE, CA 93555

COMMANDER
AF AERO PROPULSION LABORATORY, AFSC
ATTN LESTER SMALL, AFWAL/POTC
WRIGHT-PATTERSON AFB, OH 45433

COMMANDER
AIR FORCE AVIONICS LABORATORY
ATTN AARA-2, RICHARD JACOBS
WRIGHT-PATTERSON AFB, OH 45433

DIRECTOR
AF OFFICE OF SCIENTIFIC RESEARCH
ATTN NE, GEORGE KNAUSENBERGER
BOLLING AFB, DC 20332

COMMANDER
AIR FORCE FLIGHT DYNAMICS LABORATORY
ATTN AFFDL/FGL, H. SNOWBALL
ATTN AFFDL/PER, R. J. DOBBEK
WRIGHT-PATTERSON AFB, OH 45433

COMMANDER
AF WEAPONS LABORATORY, AFSC
ATTN SUL, TECHNICAL LIBRARY
KIRTLAND AFB, NM 87117

COMMANDER
ARMAMENT DEVELOPMENT AND TEST CENTER
ATTN ADTC (DLOSL), TECH LIBRARY
ATTN DLMA, DAVID T. WILLIAMS
EGLIN AIR FORCE BASE, FL 32542

AIR FORCE FLIGHT TEST CENTER
6510 ABG/SSD
ATTN TECHNICAL LIBRARY
EDWARDS AFB, CA 93523

AF INSTITUTE OF TECHNOLOGY, AU
ATTN LIBRARY AFIT (LD),
BLDG 640, AREA B
ATTN AFIT (ENM), MILTON E. FRANKE
WRIGHT-PATTERSON AFB, OH 45433

HQ, AF SYSTEMS COMMAND
ATTN SGB, CPT GEORGE JAMES
ANDREWS AFB, DC 20334

OAK RIDGE NATIONAL LABORATORY
CENTRAL RES LIBRARY, BLDG 4500N, RM 175
ATTN E. HOWARD
P. O. BOX X
OAK RIDGE, TN 37830

DEPT OF HEW
PUBLIC HEALTH SERVICE
NATIONAL INSTITUTE OF HEALTH
ATTN C. J. MCCARTHY
BLDG 13, RM 3W-13
BETHESDA, MD 20205

DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
ATTN JAMES SCHOOLLEY, CHIEF,
TEMPERATURE SECTION
ATTN T. NEGAS, SOLID STATE
CHEMISTRY DIVISION
WASHINGTON, DC 20234

DEPARTMENT OF COMMERCE
BUREAU OF EAST-WEST TRADE
OFFICE OF EXPORT ADMINISTRATION
ATTN WALTER J. RUSNACK
WASHINGTON, DC 20230

DEPARTMENT OF JUSTICE
IMMIGRATION AND NATURALIZATION SERVICE
425 "I" STREET NW
ATTN NEILL MCKAY
WASHINGTON, DC 20536

SCIENTIFIC LIBRARY
US PATENT OFFICE
ATTN MRS. CURETON
WASHINGTON, DC 20231

NASA AMES RESEARCH CENTER
ATTN MS 244-13, DEAN CHISEL
MOFFETT FIELD, CA 94035

NASA LANGLEY RESEARCH CENTER
ATTN MS 494, H. D. GARNER
ATTN MS 494, R. R. HELLBAUM
ATTN MS 185, TECHNICAL LIBRARY
HAMPTON, VA 23665

NASA LEWIS RESEARCH CENTER
ATTN VERNON D. GEBBEN
21000 BROOKPARK ROAD
CLEVELAND, OH 44135

NASA SCIENTIFIC & TECH INFO FACILITY
ATTN ACQUISITIONS BRANCH
P. O. BOX 8657
BALTIMORE/WASHINGTON INTERNATIONAL
AIRPORT, MD 21240

UNIVERSITY OF ALABAMA
CIVIL & MINERAL ENGINEERING DEPT.
ATTN HAROLD R. HENRY
P. O. BOX 1468
UNIVERSITY, AL 35486

UNIVERSITY OF ARKANSAS
TECHNOLOGY CAMPUS
ATTN PAUL C. MCLEOD
P. O. BOX 3017
LITTLE ROCK, AR 72203

UNIVERSITY OF ARKANSAS
MECHANICAL ENGINEERING
ATTN JACK H. COLE, ASSOC PROF
FAYETTEVILLE, AR 72701

CARNEGIE-MELLON UNIVERSITY
SCHENLEY PARK
ATTN PROF W. T. ROULEAU, MECH ENGR DEPT
PITTSBURGH, PA 15213

CASE WESTERN RESERVE UNIVERSITY
ATTN PROF P. A. ORNER
ATTN PROF B. HORTON
UNIVERSITY CIRCLE
CLEVELAND, OH 44106

THE CITY COLLEGE OF THE CITY
UNIVERSITY OF NY
DEPT OF MECH ENGR
ATTN PROF L. JIJI
ATTN PROF G. LOWEN
139TH ST. AT CONVENT AVE
NEW YORK, NY 10031

CLEVELAND STATE UNIVERSITY
FERN COLLEGE OF ENGINEERING
ATTN PROF R. COMPARIN
CLEVELAND, OH 44115

DUKE UNIVERSITY
COLLEGE OF ENGINEERING
ATTN C. M. HARMAN
DURHAM, NC 27706

ENGINEERING SOCIETIES LIBRARY
ATTN HOWARD GORDON
ATTN ACQUISITIONS DEPARTMENT
345 EAST 47TH STREET
NEW YORK, NY 10017

FRANKLIN INSTITUTE OF THE STATE
OF PENNSYLVANIA
ATTN KA-CHEUNG TSUI, ELEC ENGR DIV
ATTN C. A. BELSTERLING
20TH STREET & PARKWAY
PHILADELPHIA, PA 19103

HUGHES HELICOPTERS
DIVISION OF SUMMA CORPORATION
CENTINELA & TEALE STREETS
ATTN LIBRARY 2/T2124
CULVER CITY, CA 90230

IIT RESEARCH INSTITUTE
ATTN K. E. MCKEE
10 WEST 35TH STREET
CHICAGO, IL 60616

JOHNS HOPKINS UNIVERSITY
APPLIED PHYSICS LABORATORIES
ATTN MAYNARD HILL
ATTN THOMAS RANKIN
ATTN JOSEPH WALL
LAUREL, MD 20810

LEHIGH UNIVERSITY
DEPARTMENT OF MECHANICAL ENGINEERING
ATTN PROF FORBES T. BROWN
BETHLEHEM, PA 18015

LINDA HALL LIBRARY
ATTN DOCUMENTS DIVISION
5109 CHERRY STREET
KANSAS CITY, MO 64110

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
ATTN ENGINEERING TECHNICAL REPORTS,
RM 10-408
ATTN DAVID WORMLEY, MECH ENGR DEPT,
RM 3-146
77 MASSACHUSETTS AVENUE
CAMBRIDGE, MA 02139

MICHIGAN TECHNOLOGICAL UNIVERSITY
LIBRARY, DOCUMENTS DIVISION
ATTN J. HAWTHORNE
HOUGHTON, MI 49931

DISTRIBUTION (Cont'd)

UNIVERSITY OF MISSISSIPPI
ATTN JOHN A. FOX
201 CARRIER HALL, DEPT OF MECH ENGR
UNIVERSITY, MS 38677

MISSISSIPPI STATE UNIVERSITY
DRAWER ME
ATTN C. J. BELL, MECH ENG DEPT
STATE COLLEGE, MS 39672

UNIVERSITY OF NEBRASKA LIBRARIES
ACQUISITIONS DEPT, SERIALS SECTIONS
ATTN ALAN GOULD
LINCOLN, NE 68508

UNIVERSITY OF NEW HAMPSHIRE
MECH ENGR DEPT, KINGSBURY HALL
ATTN PROF CHARLES TAFT
DURHAM, NH 03824

DEPARTMENT OF MECHANICAL ENGINEERING
NEW JERSEY INSTITUTE OF TECHNOLOGY
ATTN R. Y. CHEN
323 HIGH STREET
NEWARK, NJ 07102

OHIO STATE UNIVERSITY LIBRARIES
SERIAL DIVISION, MAIN LIBRARY
1858 NEIL AVENUE
COLUMBUS, OH 43210

OKLAHOMA STATE UNIVERSITY
SCHOOL OF MECH & AEROSPACE ENGR.
ATTN PROF KARL N. REID
STILLWATER, OK 74074

MIAMI UNIVERSITY
DEPT OF ENG TECH
SCHOOL OF APPLIED SCIENCE
ATTN PROF S. B. FRIEDMAN
OXFORD, OH 45056

PENNSYLVANIA STATE UNIVERSITY
ATTN J. L. SHEARER
215 MECHANICAL ENGINEERING BUILDING
UNIVERSITY PARK, PA 16802

PENNSYLVANIA STATE UNIVERSITY
ENGINEERING LIBRARY
ATTN M. BENNETT, ENGINEERING LIBRARIAN
201 HAMMOND BLDG
UNIVERSITY PARK, PA 16802

PORTLAND STATE UNIVERSITY
DEPT OF ENGINEERING AND
APPLIED SCIENCE
P.O. BOX 751
PORTLAND, OR 97207

PURDUE UNIVERSITY
SCHOOL OF MECHANICAL ENGINEERING
ATTN PROF. VICTOR W. GOLDSCHMIDT
ATTN PROF. ALAN T. McDONALD
LAFAYETTE, IN 47907

ROCK VALLEY COLLEGE
ATTN KEN BARTON
3301 NORTH MULFORD ROAD
ROCKFORD, IL 61101

RUTGERS UNIVERSITY
LIBRARY OF SCIENCE & MEDICINE
ATTN GOVERNMENT DOCUMENTS DEPT
SANDRA R. LIVINGSTON
NEW BRUNSWICK, NJ 08903

SYRACUSE UNIVERSITY
DEPT OF MECH & AEROSPACE ENGINEERING
ATTN PROFESSOR D. S. DOSANJH
139 E. A. LINK HALL
SYRACUSE, NY 13210

UNIVERSITY OF TENNESSEE
DEPT OF MECHANICAL ENGINEERING
ATTN PROF G. V. SMITH
KNOXVILLE, TN 37916

UNIVERSITY OF TEXAS AT AUSTIN
DEPT OF MECHANICAL ENGINEERING
ATTN A. J. HEALEY
AUSTIN, TX 78712

THE UNIVERSITY OF TEXAS AT ARLINGTON
MECHANICAL ENGINEERING DEPARTMENT
ATTN ROBERT L. WOODS
ARLINGTON, TX 76019

TULANE UNIVERSITY
DEPT OF MECHANICAL ENGINEERING
ATTN H. F. HRUBECKY
NEW ORLEANS, LA 70118

UNION COLLEGE
MECHANICAL ENGINEERING
ATTN ASSOC PROF W. C. AUBREY
MECH ENGR DEPT, STEINMETZ HALL
SCHENECTADY, NY 12308

VIRGINIA POLYTECHNIC INSTITUTE OF STATE UNIV
MECHANICAL ENGINEERING DEPARTMENT
ATTN PROF H. MOSES
BLACKSBURG, VA 24061

WASHINGTON UNIVERSITY
SCHOOL OF ENGINEERING
ATTN W. M. SWANSON
P. O. BOX 1185
ST. LOUIS, MO 63130

WEST VIRGINIA UNIVERSITY
MECHANICAL ENGINEERING DEPARTMENT
ATTN RICHARD A. BAJURA
MORGANTOWN, WV 26505

WICHITA STATE UNIVERSITY
ATTN DEPT AERO ENGR, E. J. RODGERS
WICHITA, KS 67208

UNIVERSITY OF WISCONSIN
MECHANICAL ENGINEERING DEPARTMENT
ATTN FEDERAL REPORTS CENTER
ATTN NORMAN H. BEACHLEY, DIR.
DESIGN ENGINEERING LABORATORIES
1513 UNIVERSITY AVENUE
MADISON, WI 53706

WORCESTER POLYTECHNIC INSTITUTE
ATTN GEORGE C. GORDON LIBRARY (TR)
ATTN TECHNICAL REPORTS
WORCESTER, MA 01609

AIRSEARCH
P. O. BOX 5217
ATTN GARY FREDERICK
ATTN TREVOR SUTTON
ATTN TOM TIPPETTS
111 SOUTH 34TH STREET
PHOENIX, AZ 85010

AVCO SYSTEMS DIVISION
ATTN W. K. CLARK
ATTN R. LIMPACHER
201 LOWELL STREET
WILMINGTON, MA 01887

BELL HELICOPTER COMPANY
ATTN R. D. YEARY
P. O. BOX 482
FORTWORTH, TX 76101

BENDIX CORPORATION
ELECTRODYNAMICS DIVISION
ATTN D. COOPER
11600 SHERMAN WAY
N. HOLLYWOOD, CA 90605

BENDIX CORPORATION
RESEARCH LABORATORIES DIV.
BENDIX CENTER
ATTN C. J. AHERN
SOUTHFIELD, MI 48075

BOEING COMPANY, THE
ATTN HENRIK STRAUB
P. O. BOX 3707
SEATTLE, WA 98124

BOWLES FLUIDICS CORPORATION
ATTN VICE PRES./ENGR.
9347 FRASER AVENUE
SILVER SPRINGS, MD 20910

RONALD BOWLES
2105 SONDR COURT
SILVER SPRING, MD 20904

CHAMBERLAIN MANUFACTURING CORP
ATTN W. I. WESTERMAN
EAST 4TH AND ESTHER STS
P.O. BOX 2545
WATERLOO, IA 50705

CONTINENTAL CAN COMPANY
TECH CENTER
ATTN P. A. BAUER
1350 W. 75TH STREET
CHICAGO, IL 60620

CORDIS CORPORATION
ATTN STEPHEN F. VADAS, K-2
P. O. BOX 428
MIAMI, FL 33137

CORNING GLASS WORKS
FLUIDIC PRODUCTS
ATTN R. H. BELLMAN
HOUGHTON PARK, B-2
CORNING, NY 14830

CHRYSLER CORPORATION
P. O. BOX 118
CIMS-418-33-22
ATTN L. GAU
DETROIT, MI 48231

DISTRIBUTION (Cont'd)

JOHN DEERE PRODUCT ENGINEERING CENTER
ATTN V. S. KUMAR
WATERLOO, IA 50704

ELECTRIC POWER RESEARCH INSTITUTE
3412 HILLVIEW AVE
P.O. BOX 10412
ATTN MS. M. ANGIN,
P. M. GEOTHERMAL ENERGY
PALO ALTO, CA 94303

FLUIDICS QUARTERLY
ATTN D. H. TARUMOTO
P. O. BOX 2989
STANFORD, CA 94305

GENERAL ELECTRIC COMPANY
SPACE/RESO DIVISIONS
ATTN MGR LIBRARIES, LARRY CHASEN
P. O. BOX 8555
PHILADELPHIA, PA 19101

GENERAL ELECTRIC COMPANY
KNOLLS ATOMIC POWER LABORATORY
ATTN D. KROMAENHOEK
SCHENECTADY, NY 12301

GENERAL MOTORS CORPORATION
DELCO ELECTRONICS DIV
MANFRED G. WRIGHT
NEW COMMERCIAL PRODUCTS
ATTN R. E. SPARKS
P. O. BOX 1104
KOKOMO, IN 46901

GRUMMAN AEROSPACE CORPORATION
TECHNICAL INFORMATION CENTER
ATTN C. W. TURNER, DOCUMENTS
LIBRARIAN
SOUTH OYSTER BAY ROAD
BETHPAGE, L. I., NY 11714

HAMILTON STANDARD
DIVISION OF UNITED AIRCRAFT CORPORATION
ATTN PHILIP BARNES
WINDSOR LOCKS, CT 06096

HONEYWELL, INC
ATTN J. HEDEEN
1625 ZARTHAN AVE
MINNEAPOLIS, MN 55413

JOHNSON CONTROLS, INC
ATTN WARREN A. LEDERMAN
ATTN GEORGE JANU
507 E MICHIGAN
MILWAUKEE, WI 53201

MOORE PRODUCTS COMPANY
ATTN R. ADAMS
SPRING HOUSE, PA 19477

MARTIN MARIETTA CORPORATION
AEROSPACE DIVISION
ATTN R. K. BRODERSON, MP 326
P. O. BOX 5837
ORLANDO, FL 32805

MCDONNELL AIRCRAFT COMPANY
GUIDANCE AND CONTROL MECHANICS DIVISION
ATTN LOYAL GUENTHER
ST. LOUIS, MO 63166

MCDONNELL DOUGLAS ASTRONAUTICS CO
PROPULSION DEPARTMENT
ATTN V. E. HALOULAKOS (A8-226)
ATTN J. D. SCHWEIKLE (A3-226)
5301 BOLSA AVENUE
HUNTINGTON BEACH, CA 92647

NATIONAL FLUID POWER ASSOCIATION
ATTN JOHN R. LUEKE
DIR OF TECH SERVICES
3333 NORTH MAYFAIR ROAD
MILWAUKEE, WI 53222

NEOS, INC
3711 AIR PARK RD
ATTN A. J. OSTDIEK
LINCOLN, NE 68524

PLESSEY AEROSPACE LTD
ATTN A. ROSENBERG
1700 OLD MEADOW ROAD
MCLEAN, VA 22102

RICHARD WHITE & ASSOCIATES
ELECTRO/MECHANICAL ENGINEERS
ATTN RICHARD P. WHITE
77 PELHAM ISLE ROAD
SUDBURY, MA 01776

ROCKWELL INTERNATIONAL CORPORATION
COLUMBUS AIRCRAFT DIVISION, P. O. BOX 1259
ATTN MARVIN SCHWEIGER
4300 E 5TH AVENUE
COLUMBUS, OH 43216

SANDIA LABORATORIES
ATTN WILLIAM R. LEUBENBERGER, DIV 2323
ATTN JERRY HOOD
ATTN NED KELTNER
ALBUQUERQUE, NM 87185

SCIENCE APPLICATIONS, INC
8400 WESTPARK DR
ATTN J. ISSEMAN
MCLEAN, VA 22102

SIKORSKY AIRCRAFT
NORTH MAIN STREET
ATTN J. R. SOHNLEIN
STRATFORD, CT 06602

STEIN ENGINEERING SERVICES, INC
5602 E. MONTEROSA
PHOENIX, AZ 85018

TRANS-TECH, INC
12 KEEB AVE
ATTN L. DOMINGUES
GAITHERSBURG, MD 20760

TRITEC, INC
ATTN L. SIERACKI
P. O. BOX 56
COLUMBIA, MD 21045

UNITED TECHNOLOGIES RESEARCH CENTER
ATTN R. E. OLSON, MGR FLUID
DYNAMICS LABORATORY
400 MAIN STREET
E. HARTFORD, CT 06108

WESTINGHOUSE ELECTRIC CORP
1310 BEULAH RD
ATTN F. GOLDSCHNEID
PITTSBURGH, PA 15235

US ARMY ELECTRONICS RESEARCH
& DEVELOPMENT COMMAND
ATTN TECHNICAL DIRECTOR, DRDEL-CT

HARRY DIAMOND LABORATORIES
ATTN 00100, CO/TD/TSG/DIV DIRS
ATTN RECORD COPY, 81200
ATTN HDL LIBRARY, (3 COPIES), 81100
ATTN HDL LIBRARY, (WOODBIDGE), 81100
ATTN TECHNICAL REPORTS BRANCH, 81300
ATTN CHAIRMAN, EDITORIAL COMMITTEE
ATTN CORRIGAN, J., 00240
ATTN CHIEF, 13000
ATTN CHIEF, 13400 (10 COPIES)
ATTN LANHAM, C., 00210 (2 COPIES)
ATTN DEADWYLER, R., 13400 (10 COPIES)