



AD-A092 743

ANALYTIC SCIENCES CORP READING MA F/G 17/7
OMEGA SIGNAL COVERAGE PREDICTION DIAGRAMS FOR 10.2 KHZ. VOLUME --ETC(U)
OCT 80 R R GUPTA, S F DONNELLY, P M CREAMER DOT-CG-951480-A
UNCLASSIFIED TASC-TR-3077-2-VOL-3 NL

1 * 1
NL
20/00/00

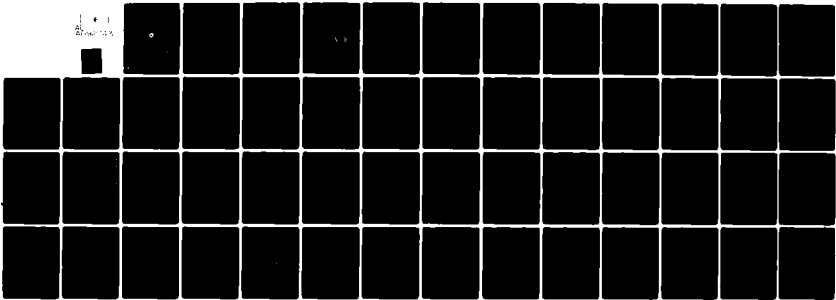

END
DATE
FILMED
3-8-11
DTIC

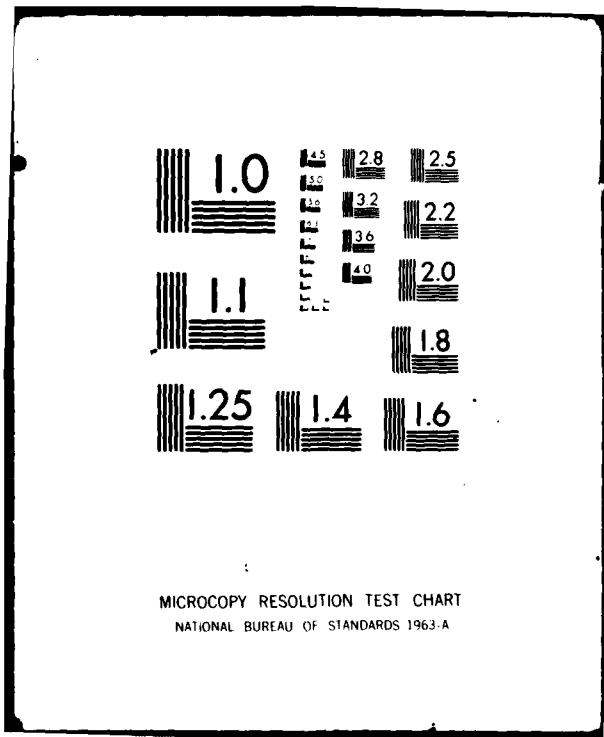

LEVEL III

10

6 OMEGA SIGNAL COVERAGE
PREDICTION DIAGRAMS FOR 10.2 kHz.
VOLUME III, COMPOSITE DIAGRAMS.

AD A 092743

10 Radha R./Gupta
Stephen F./Donnelly
Paul M./Creamer
Suzanne/Sayer

THE ANALYTIC SCIENCES CORPORATION
One Jacob Way
Reading, Massachusetts 01867

14 TASC-TR-3077-2-VOL-3



12 56

11 October 1980

9 FINAL REPORT 54 71 Oct 80

15 DOT CG-951480-A

Document is available to the U.S. public through the
National Technical Information Service,
Springfield, Virginia 22161

DTIC
ELECTE
DEC 10 1980

D

Prepared for

U.S. DEPARTMENT OF TRANSPORTATION
UNITED STATES COAST GUARD
Omega Navigation System Operations Detail
Washington, D.C. 20593

DOC FILE COPY

404565 80 12 08 002

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

delta 1/2 1/2

1. Report No.		2. Government Accession No.		3. Recipient's Catalog No.	
		AD-A092743			
4. Title and Subtitle				5. Report Date	
OMEGA SIGNAL COVERAGE PREDICTION DIAGRAMS FOR 10.2 kHz				October 1980	
7. Author(s)				8. Performing Organization Report No.	
R.R. Gupta, S.F. Donnelly, P.M. Creamer, and S. Saver				TR-3077-2	
9. Performing Organization Name and Address				10. Work Unit No. (TRAIS)	
THE ANALYTIC SCIENCES CORPORATION One Jacob Way Reading, Massachusetts 01867					
12. Sponsoring Agency Name and Address				11. Contract or Grant No.	
U.S. Department of Transportation U.S. Coast Guard Omega Navigation System Operations Detail Washington, D.C. 20593				DOT-CG-951480-A	
				13. Type of Report and Period Covered	
				Final Report Sept. 1979 - Oct. 1980	
13. Supplementary Notes				14. Sponsoring Agency Code	

16. Abstract

Individual Omega station and composite (Omega Navigation System) 10.2 kHz signal coverage prediction diagrams have been developed for eight times. The diagrams show the global accessibility of "usable" 10.2 kHz signals at eight fixed diurnal/seasonal times for two usable signal access criteria. Criterion I requires: signal-to-noise ratio (SNR) ≥ -20 dB (in a 100 Hz noise bandwidth) and $\Delta\theta \leq 20$ centicycles (cec), where $\Delta\theta$ is the modal interference-induced phase deviation in the signal phase relative to the reference signal phase. Criterion II differs from Criterion I in that the SNR ≥ -30 dB. Volume I presents the diagram development methodology and contains individual station nighttime modal interference diagrams. Each modal interference diagram identifies regions throughout the world where $\Delta\theta \leq 20$ cec for nighttime propagation conditions.

Volume II presents 64 individual Omega station diagrams (Mercator projection): eight selected coverage times for each of eight stations. Each diagram displays the SNR and $\Delta\theta$ contours for a designated signal access criterion and coverage time.

17. Key Words		18. Distribution Statement	
OMEGA Very Low Frequency Propagation Omega Signal Coverage Diagram Omega Modal Interference Diagram		Document is available to the U.S. public through the National Technical Information Service Springfield, Virginia 22161	

19. Security Classif. (of this report)	20. Security Classif. (of this page)	21. No. of Pages	22. Price
UNCLASSIFIED	UNCLASSIFIED		

16. ABSTRACT (Continued)

Volume III contains 48 composite coverage diagrams which embody the eight coverage times, two signal access criteria, and three different projections (North and South pole centered Azimuthal Equal Distance, and Mercator). Each diagram displays the global accessibility of usable signals from the system for a designated signal access criterion and coverage time.

Volume IV tabulates the bearing angles of great circles to each Omega station. These angles are computed at latitude/longitude grid points having a uniform spacing of four degrees.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

DTIC
 ELECTE
 DEC 10 1980
 S D
 D

PREFACE


This volume contains 48 composite (full system) 10.2 kHz signal coverage prediction diagrams: eight selected coverage times (0600 and 1800 GMT in February, May, August and November) for each of two usable signal access criteria and three cartographic projections. The two criteria are based on threshold values of signal-to-noise ratio (SNR) and modal interference-induced deviations in the signal phase ($\Delta\phi$). Both criteria require $\Delta\phi < 20$ cec (centicycles). Criteria I and II require $\text{SNR} \geq -20$ dB (decibels) and $\text{SNR} \geq -30$ dB, respectively.

The composite diagrams display the global accessibility of usable 10.2 kHz signals from the full system (all Omega stations) at a selected time based on one of the two signal access criteria. The composite coverage at each selected time is displayed in a Mercator projection and in two Azimuthal Equal Distance (AED) projections, centered at the North and South Pole. In each diagram, the combination of signals that can be accessed in a region is indicated by the set of letters within the contours enclosing the region. For example, in the composite diagram shown on page 1, the expected coverage in Iceland is from stations A, B, D, F and H. Some regions display a number indicating the number of signals that can be received in that region. These stations, however, can be readily determined as each coverage contour is labeled with a station designator and an arrow in the direction of the accessibility of the usable signal from the labeled station. For example, the region around the Norway station in the diagram shown on page 1 is labeled with a 6. Coverage in this region is from stations B, C, D, E, F and H. The coverage diagrams also indicate (with shading) areas with at least three usable signals, but where all possible combinations of three signals yield a geometric dilution of precision which is above the prescribed threshold value of one kilometer of radial position error per centicycle of line-of-position phase error.


In all diagrams, the receiver noise bandwidth is assumed to be 100 Hz and the radiated power of each transmitting station is taken to be 10 kW. The key for locating a composite coverage diagram at a selected time and signal access criterion is given in the Table of Contents.

METRIC CONVERSION FACTORS

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
mm	millimeters	0.04	inches	in
cm	centimeters	0.4	inches	in
m	meters	3.3	feet	ft
m	meters	1.1	yards	yd
km	kilometers	0.6	miles	mi
AREA				
cm ²	square centimeters	0.16	square inches	in ²
m ²	square meters	1.2	square yards	yd ²
km ²	square kilometers	0.4	square miles	mi ²
ha	hectares (10,000 m ²)	2.5	acres	ac
MASS (weight)				
g	grams	0.035	ounces	oz
kg	kilograms	2.2	pounds	lb
t	tonnes (1000 kg)	1.1	short tons	st
VOLUME				
ml	milliliters	0.03	fluid ounces	fl oz
l	liters	2.1	pints	pt
l	liters	1.06	quarts	qt
l	liters	0.26	gallons	gal
m ³	cubic meters	35	cubic feet	cu ft
m ³	cubic meters	1.3	cubic yards	yd ³
TEMPERATURE (degrees)				
°C	Celsius temperature	9/5 (then add 32)	Fahrenheit temperature	°F

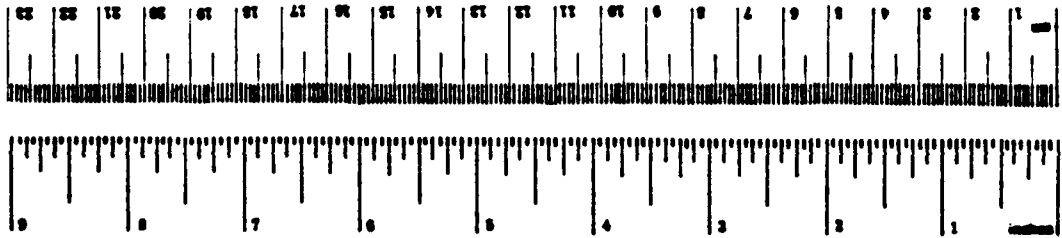

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
in	inches	2.5	centimeters	cm
ft	feet	30	centimeters	cm
yd	yards	0.9	meters	m
mi	miles	1.6	kilometers	km
AREA				
in ²	square inches	0.5	square centimeters	cm ²
ft ²	square feet	0.09	square meters	m ²
yd ²	square yards	0.8	square meters	m ²
mi ²	square miles	2.6	square kilometers	km ²
ac	acres	0.4	hectares	ha
MASS (weight)				
oz	ounces	28	grams	g
lb	pounds	0.45	kilograms	kg
st	short tons (2000 lb)	0.9	tonnes	t
VOLUME				
fl oz	fluid ounces	0	milliliters	ml
pt	pints	16	milliliters	ml
qt	quarts	20	milliliters	ml
gal	gallons	0.24	liters	l
cu ft	cubic feet	0.028	liters	l
cu yd	cubic yards	0.76	liters	l
cu ft	cubic feet	0.03	cubic meters	m ³
cu yd	cubic yards	0.76	cubic meters	m ³
TEMPERATURE (degrees)				
°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

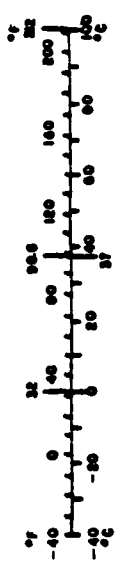

* 1 lb = 2.54 (metric). For other exact conversions and more detailed tables, see NBS Mon. Publ. 285, Units of Weight and Measure, Price \$2.25, SD Catalog No. C13.10-285.

TABLE OF CONTENTS


Page
Composite 10.2 kHz Signal Coverage Prediction Diagrams 1-48

<u>Coverage Time</u>		<u>Signal</u>		
<u>Month</u>	<u>GMT</u>	<u>Access</u>	<u>Projection</u>	<u>Page No.</u>
		<u>Criterion</u>		
February	0600	I	Mercator	1
			AED (N Pole)	2
			AED (S Pole)	3
		II	Mercator	4
			AED (N Pole)	5
			AED (S Pole)	6
	1800	I	Mercator	7
			AED (N Pole)	8
			AED (S Pole)	9
		II	Mercator	10
			AED (N Pole)	11
			AED (S Pole)	12
May	0600	I	Mercator	13
			AED (N Pole)	14
			AED (S Pole)	15
		II	Mercator	16
			AED (N Pole)	17
			AED (S Pole)	18
	1800	I	Mercator	19
			AED (N Pole)	20
			AED (S Pole)	21
		II	Mercator	22
			AED (N Pole)	23
			AED (S Pole)	24
August	0600	I	Mercator	25
			AED (N Pole)	26
			AED (S Pole)	27
		II	Mercator	28
			AED (N Pole)	29
			AED (S Pole)	30

TABLE OF CONTENTS (Continued)


<u>Coverage Time</u>		<u>Signal</u>	<u>Projection</u>	<u>Page No.</u>
<u>Month</u>	<u>GMT</u>	<u>Access</u> <u>Criterion</u>		
August (Cont.)	1800	I	Mercator	31
			AED (N Pole)	32
			AED (S Pole)	33
		II	Mercator	34
			AED (N Pole)	35
			AED (S Pole)	36
November	0600	I	Mercator	37
			AED (N Pole)	38
			AED (S Pole)	39
		II	Mercator	40
			AED (N Pole)	41
			AED (S Pole)	42
	1800	I	Mercator	43
			AED (N Pole)	44
			AED (S Pole)	45
		II	Mercator	46
			AED (N Pole)	47
			AED (S Pole)	48

-20 dB SNR FEBRUARY 0600 GMT

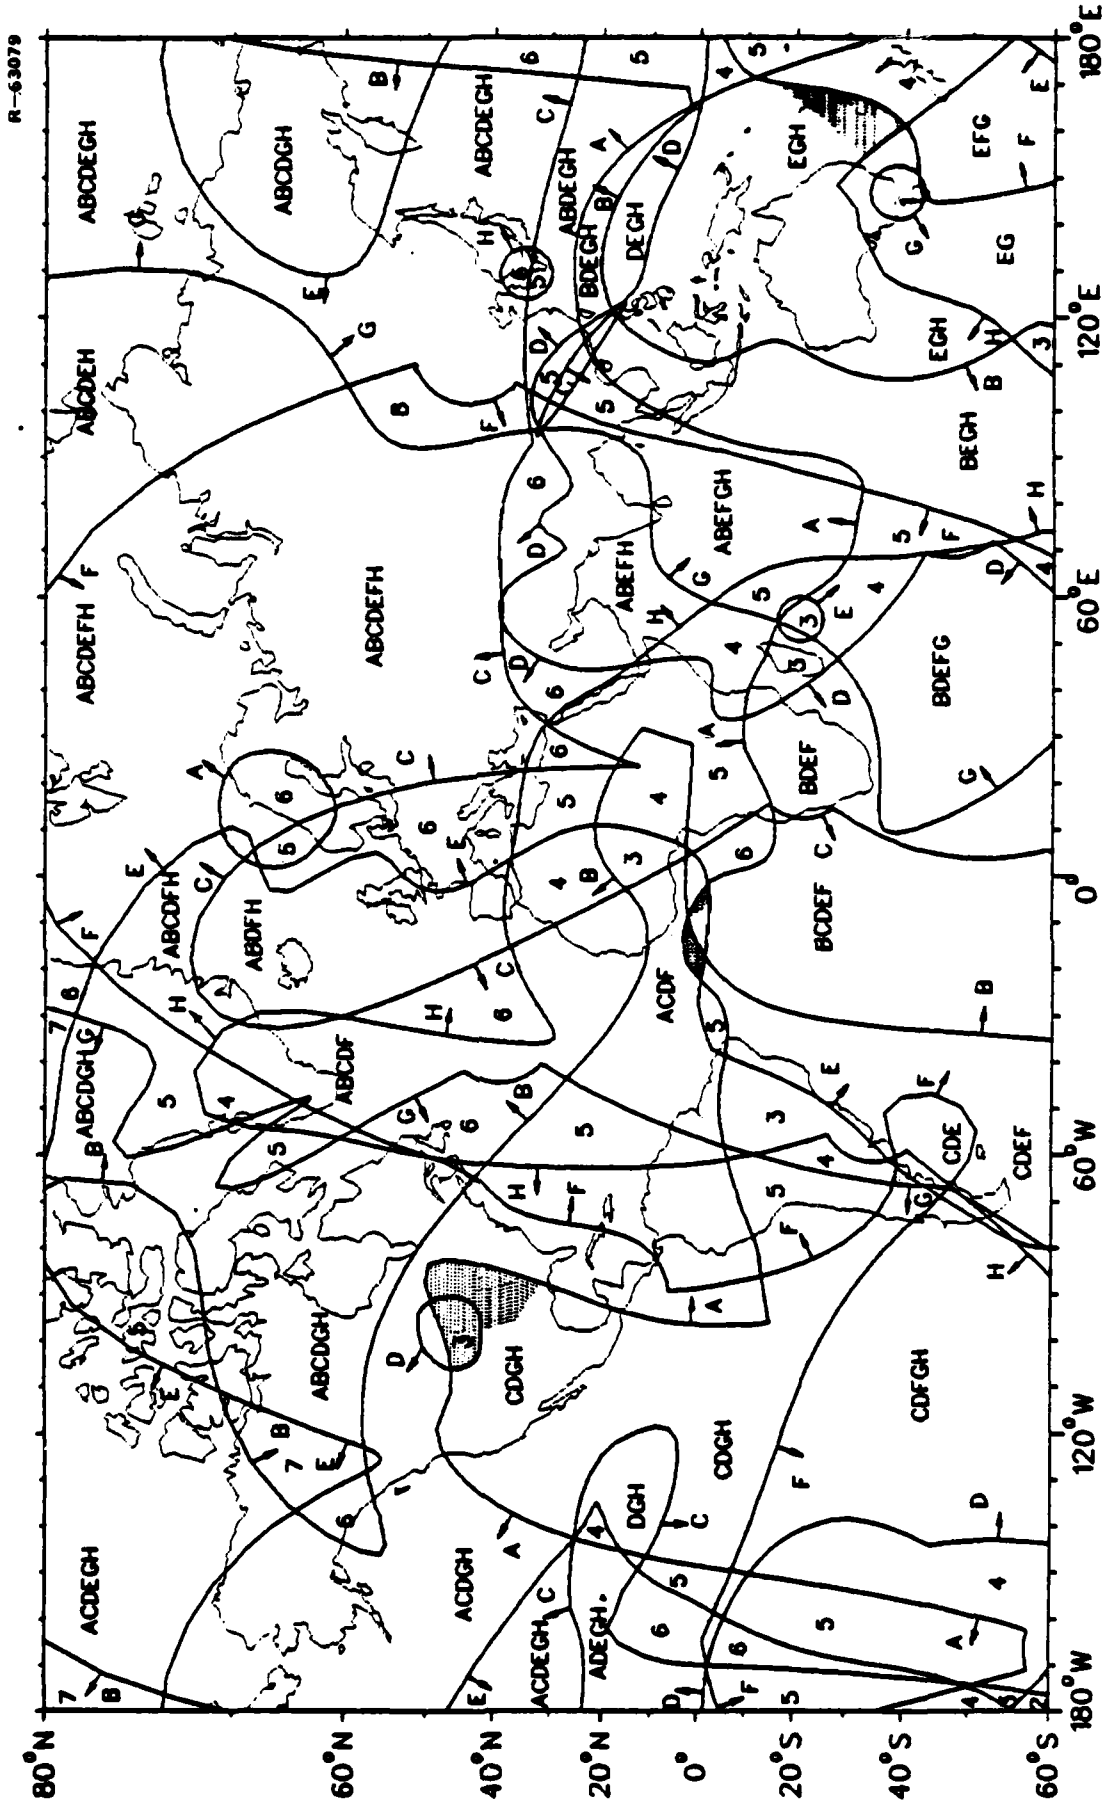

R-63079


AZ EQ DIST
(S POLE)
-20 dB SNR
FEBRUARY
0600 GMT

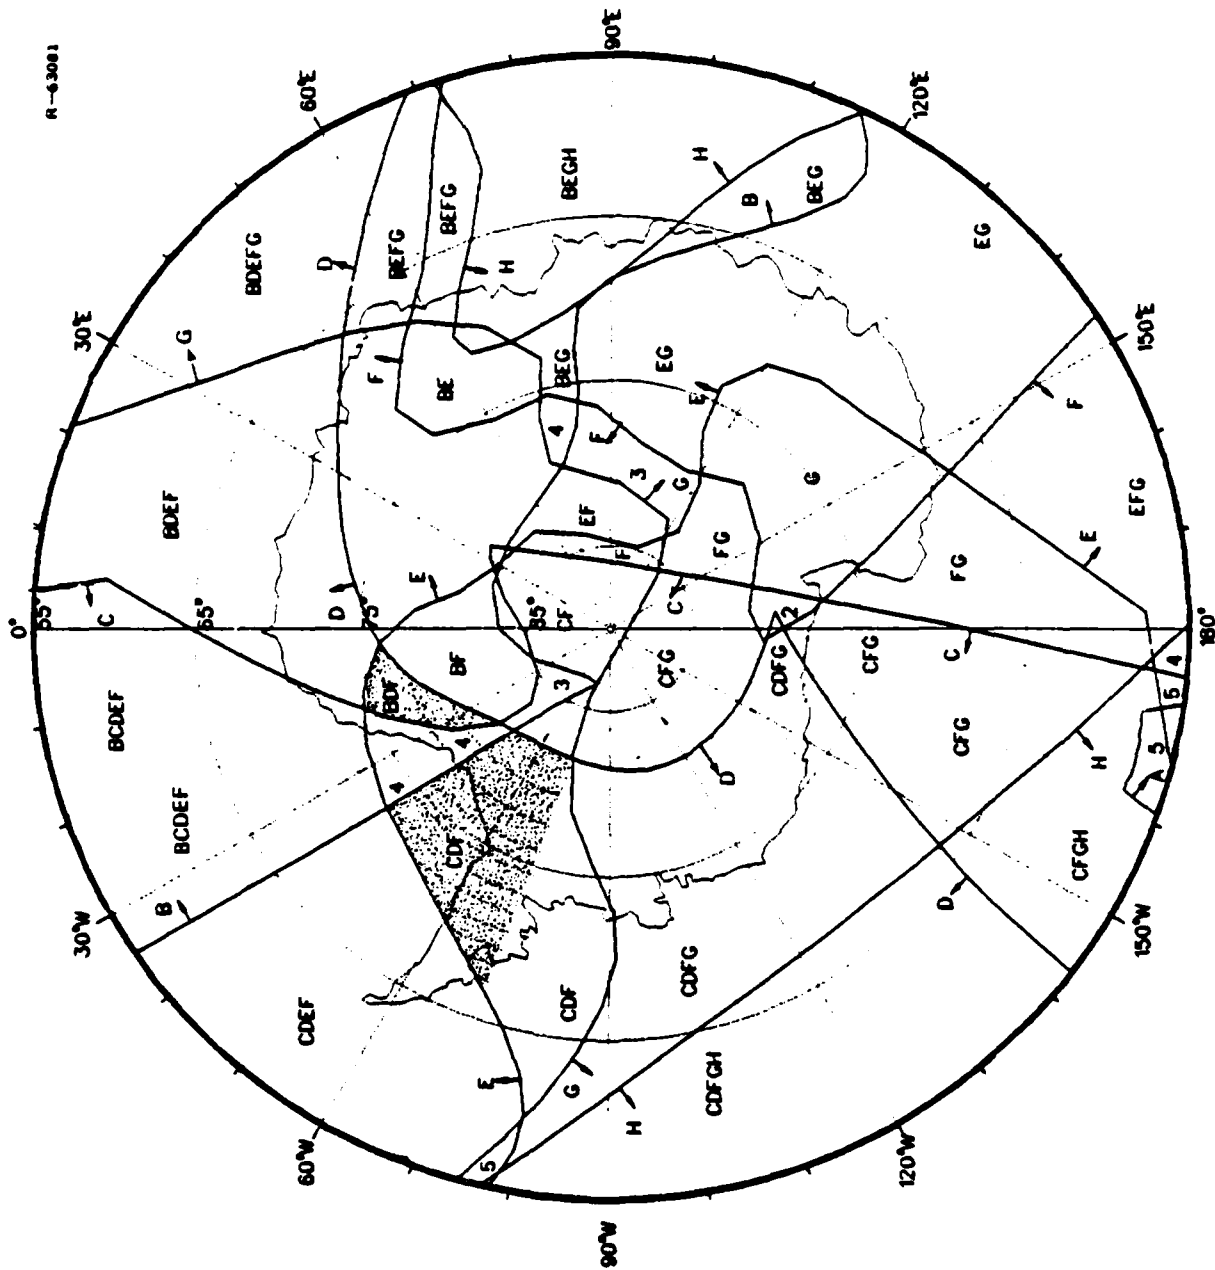


R-33081

-30 dB SNR FEBRUARY 0600 GMT

R-63082

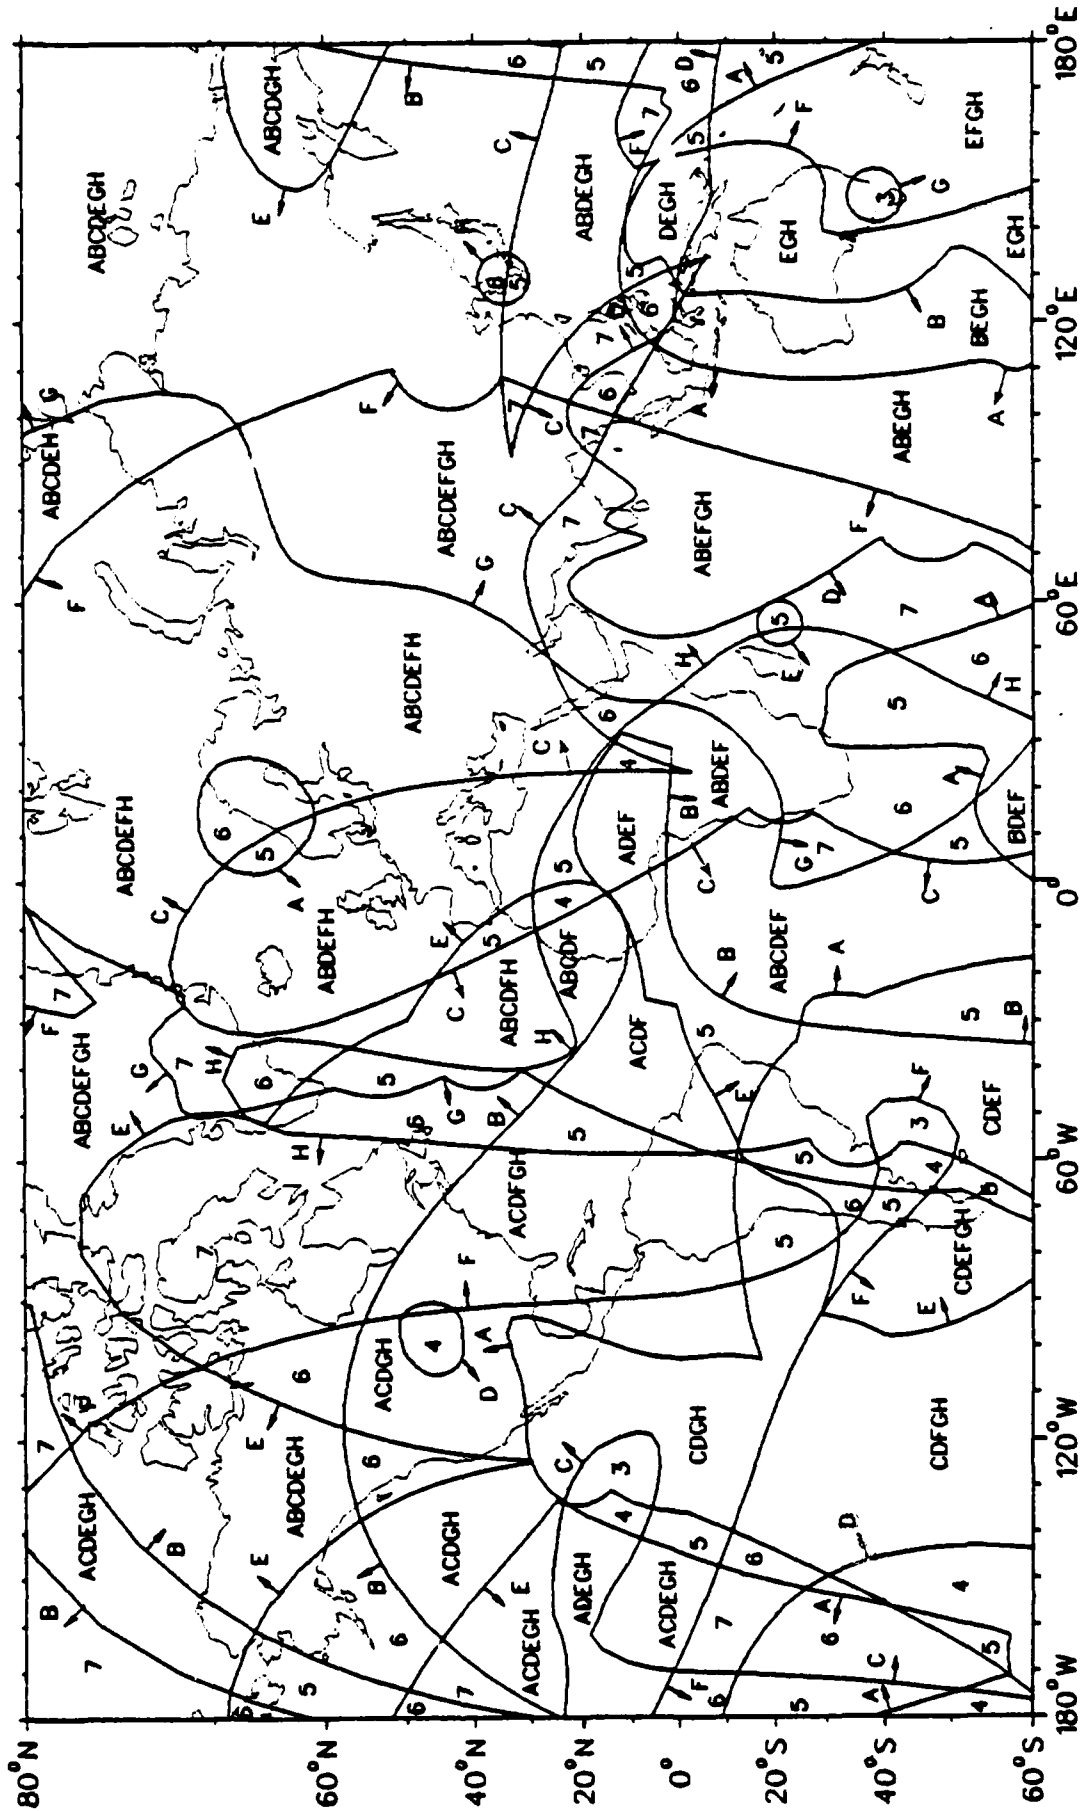


AZ EQ DIST
(N POLE)
-30 dB SNR
FEBRUARY
0600 GMT

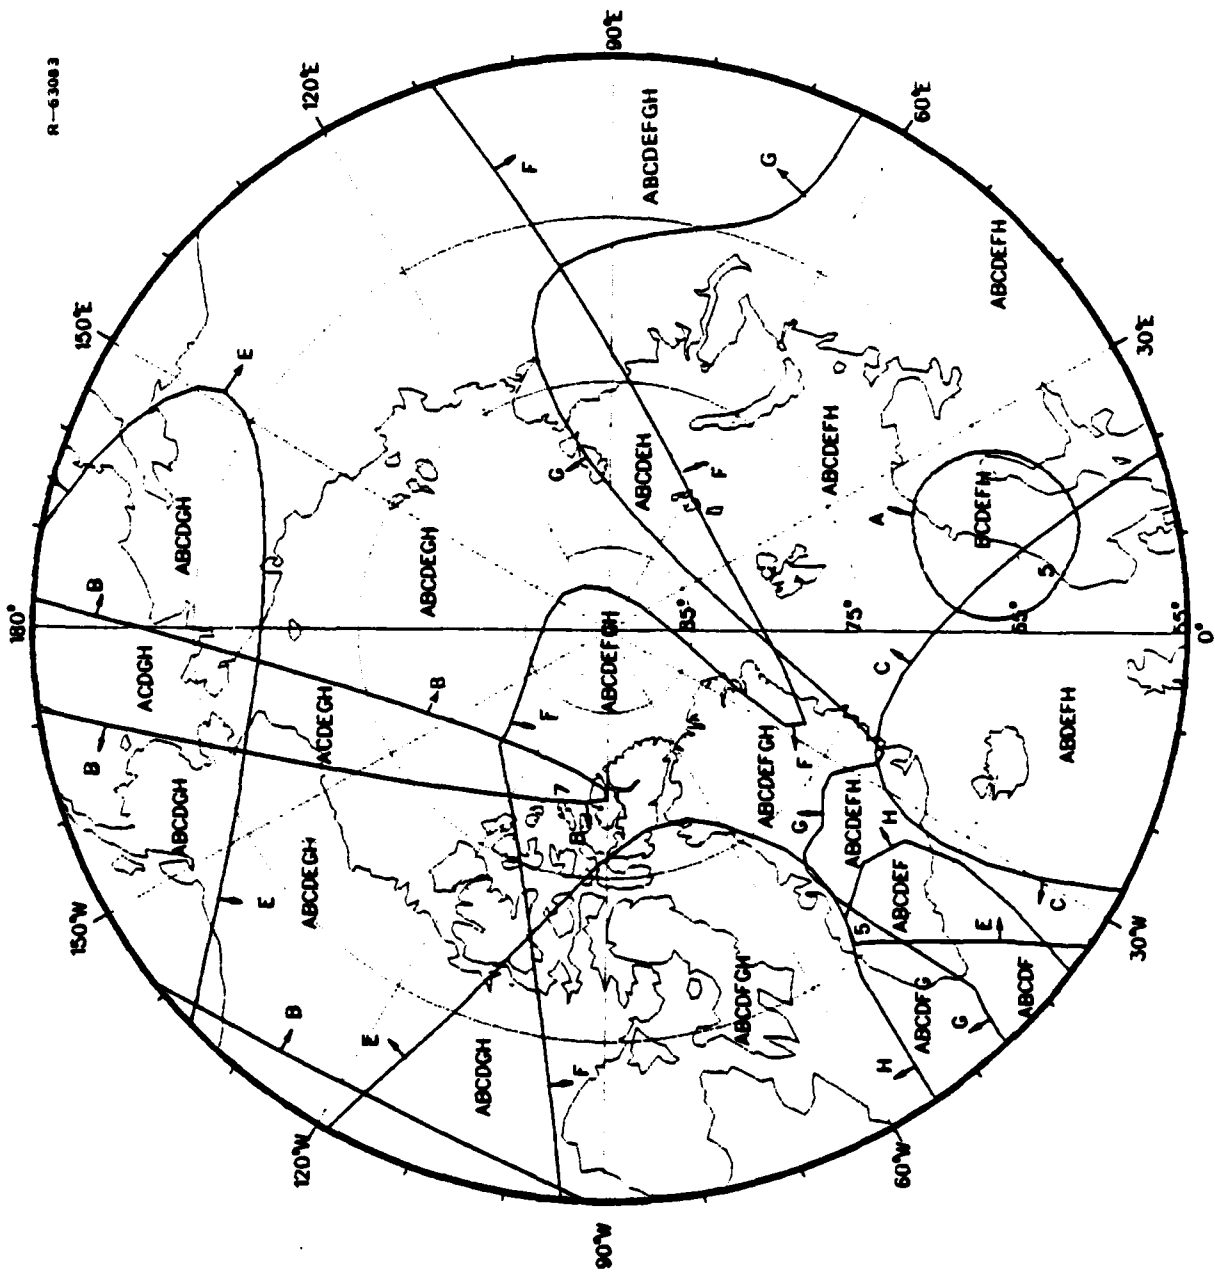


R-63083

AZ EQ DIST
 (S POLE)
 -30 dB SNR
 FEBRUARY
 0600 GMT

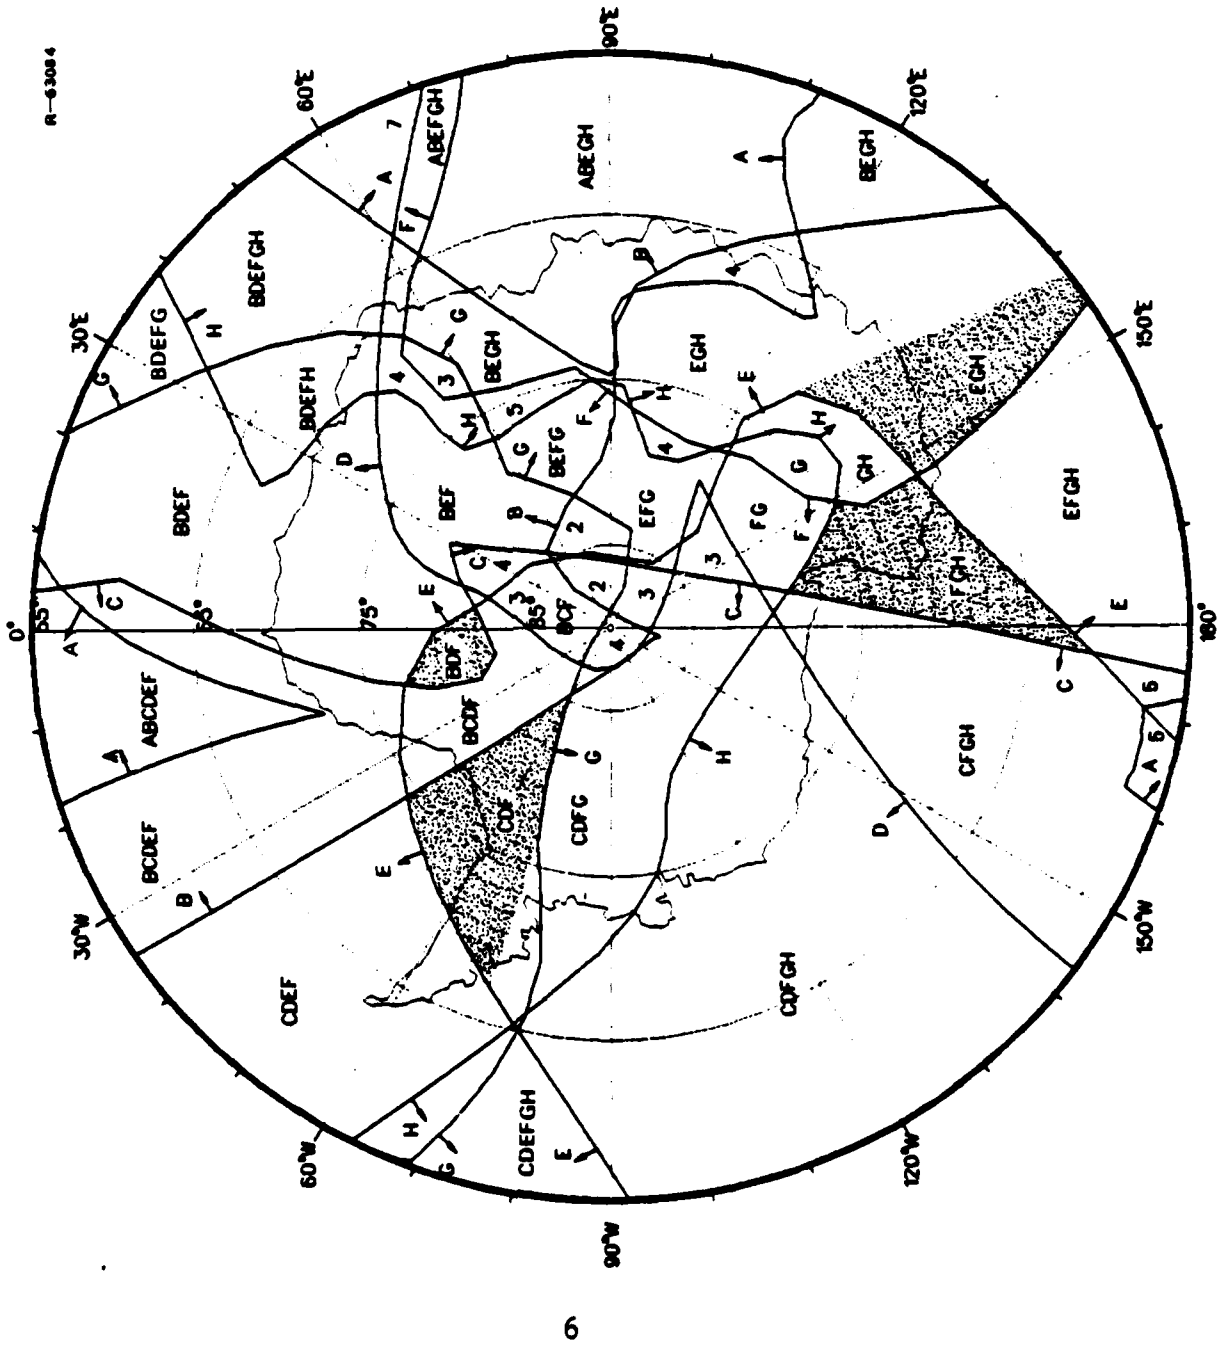


-20 dB SNR FEBRUARY 1800 GMT

R-63074

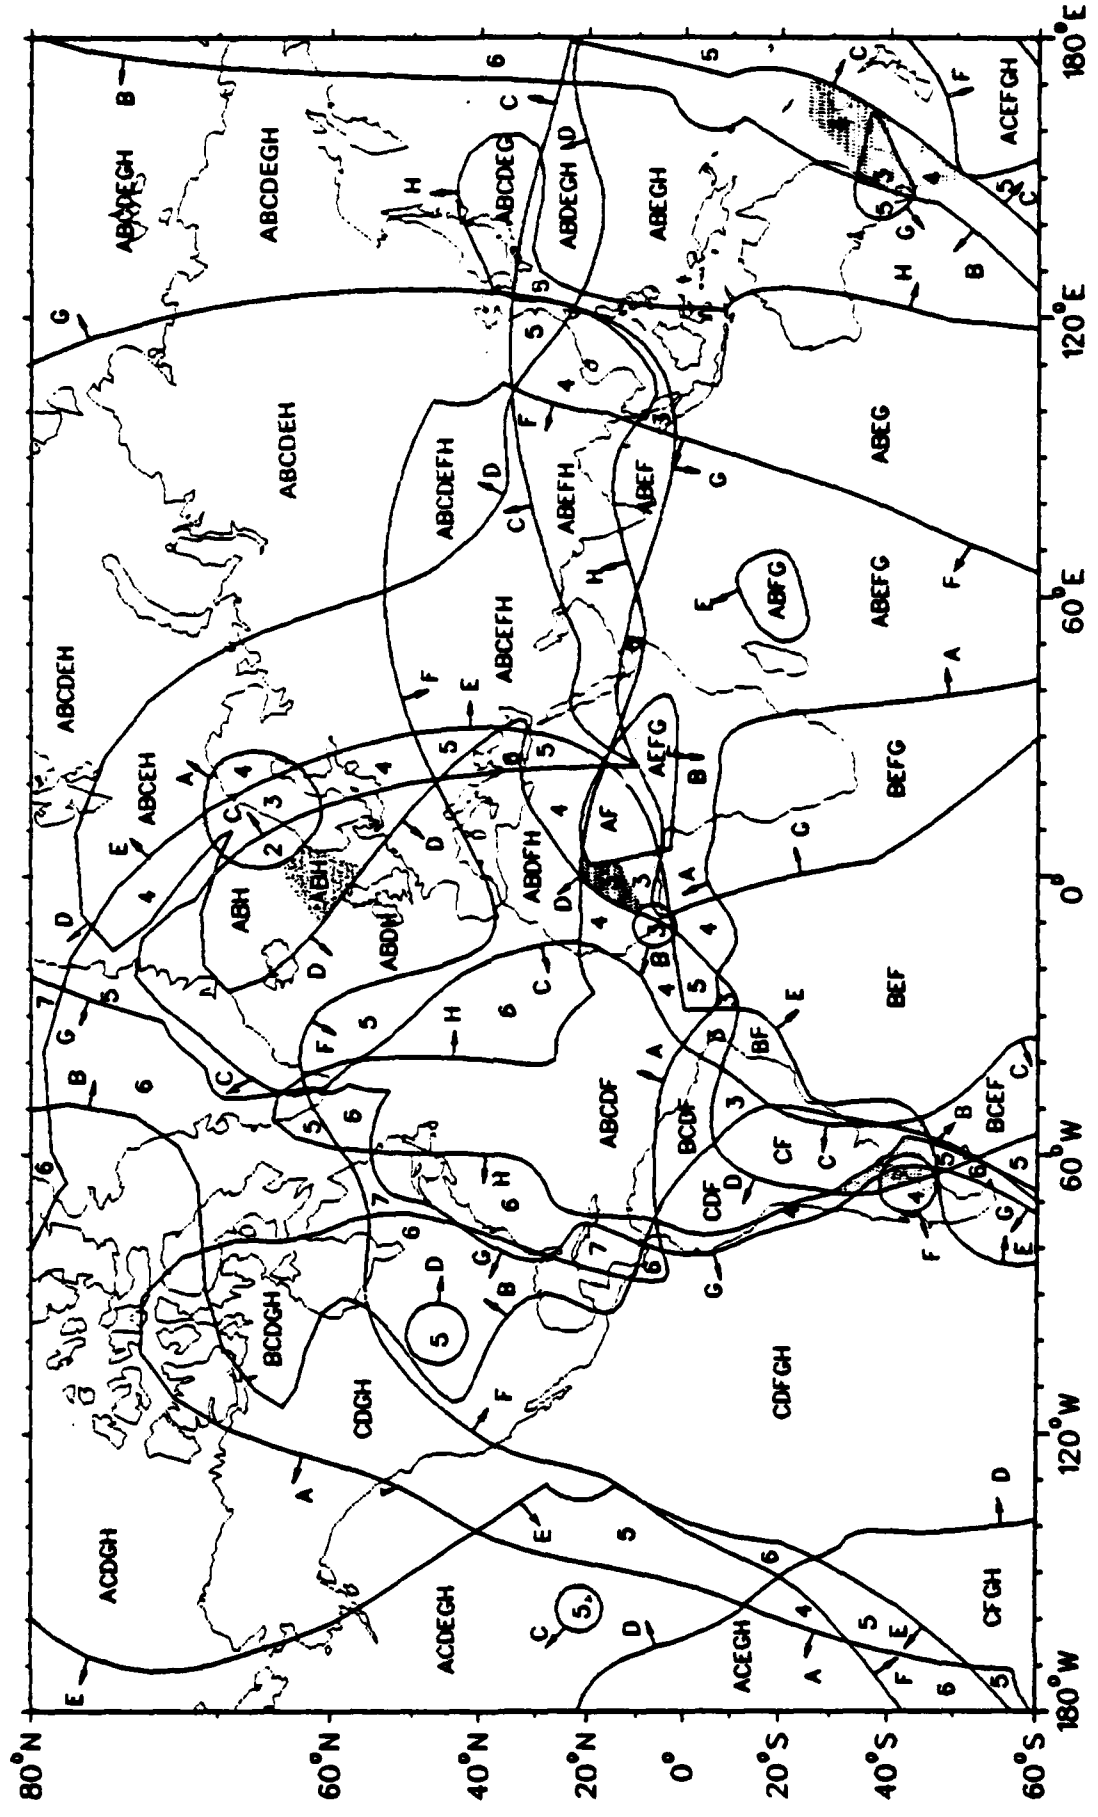


AZ EQ DIST
(N POLE)
-20 dB SNR
FEBRUARY
1800 GMT

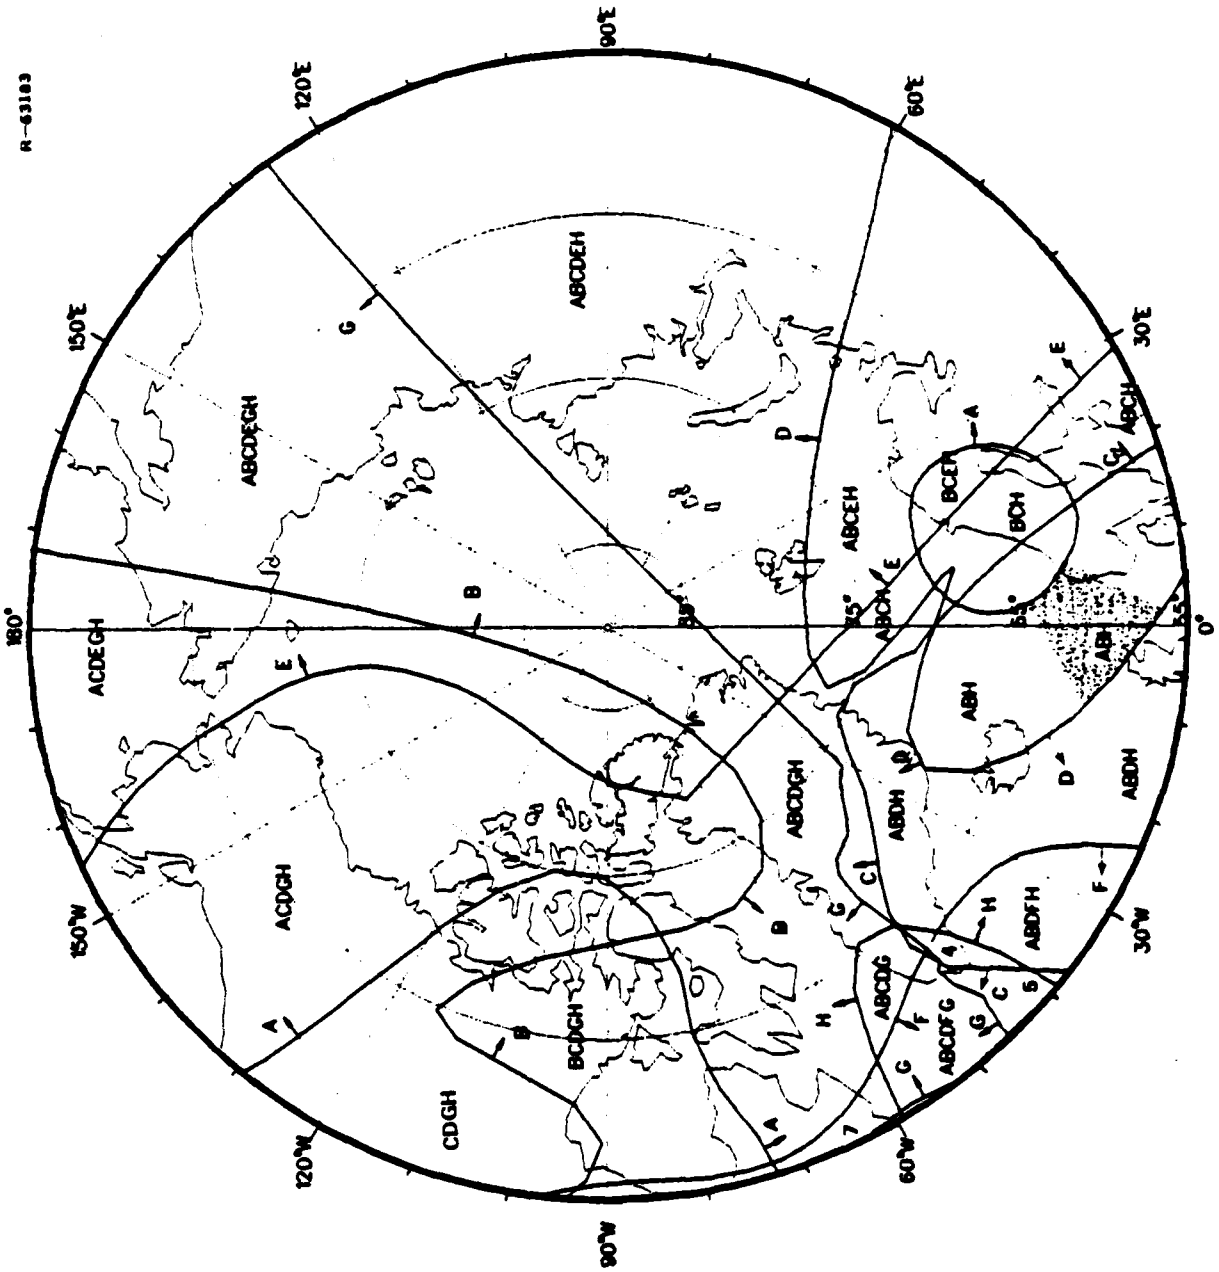


R-53183

AZ EQ DIST
 (S POLE)
 -20 dB SNR
 FEBRUARY
 1800 GMT

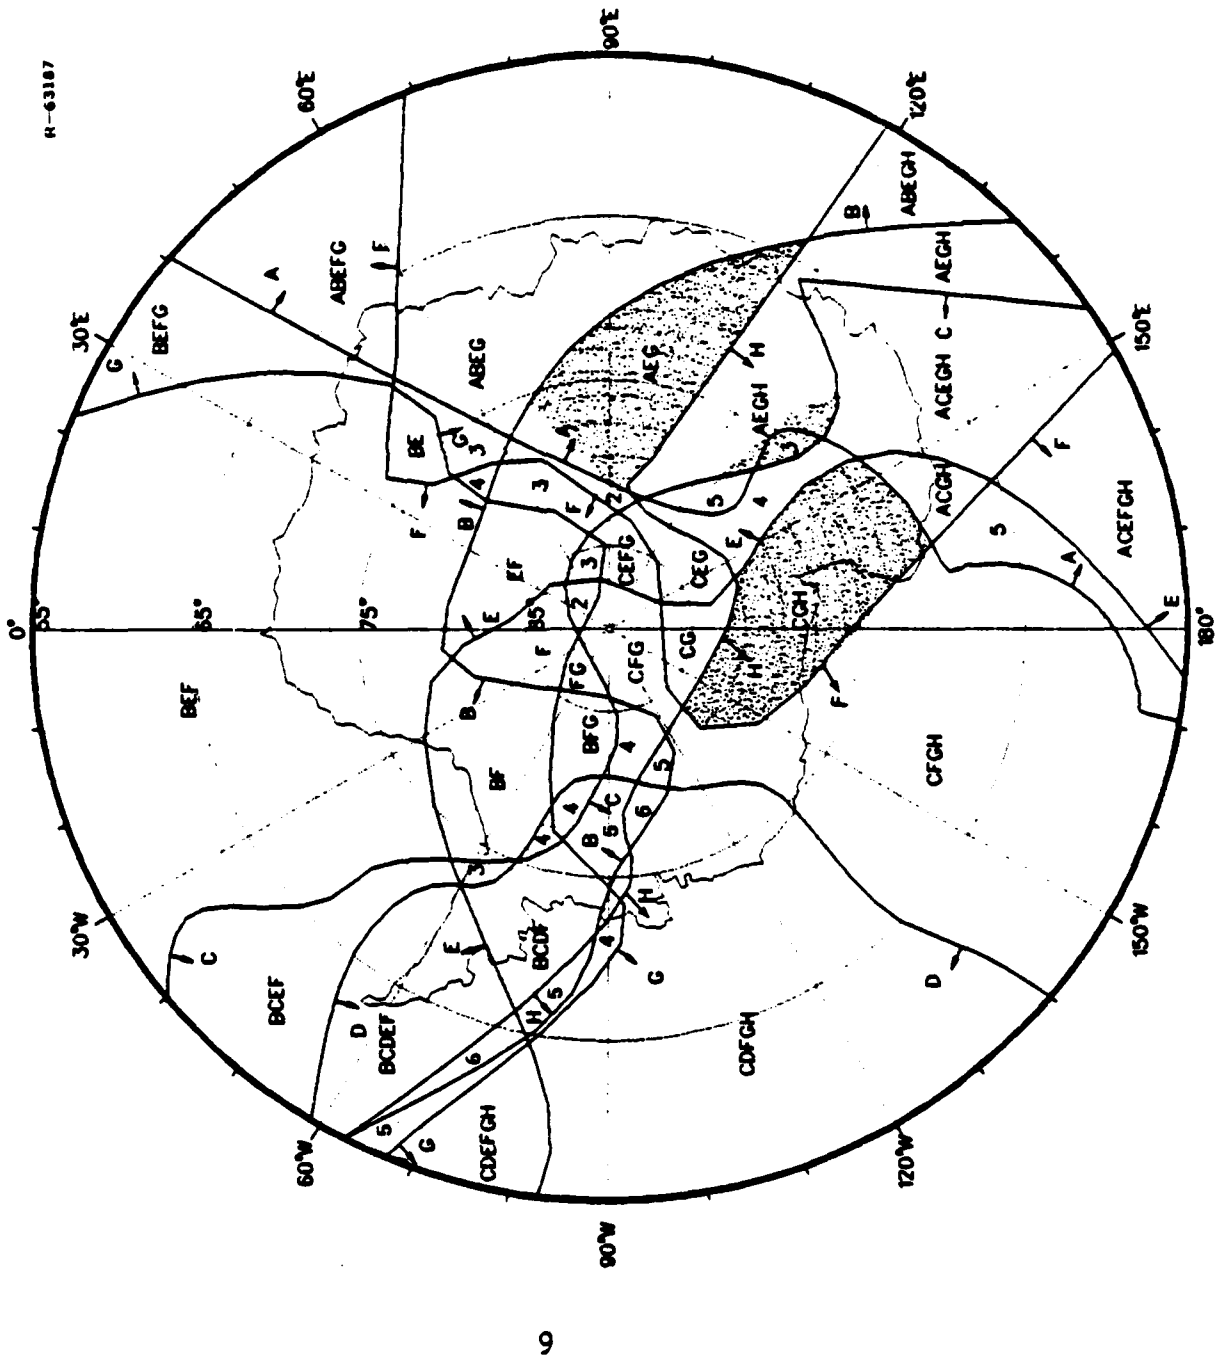


H-63187

-30 dB SNR FEBRUARY 1800 GMT

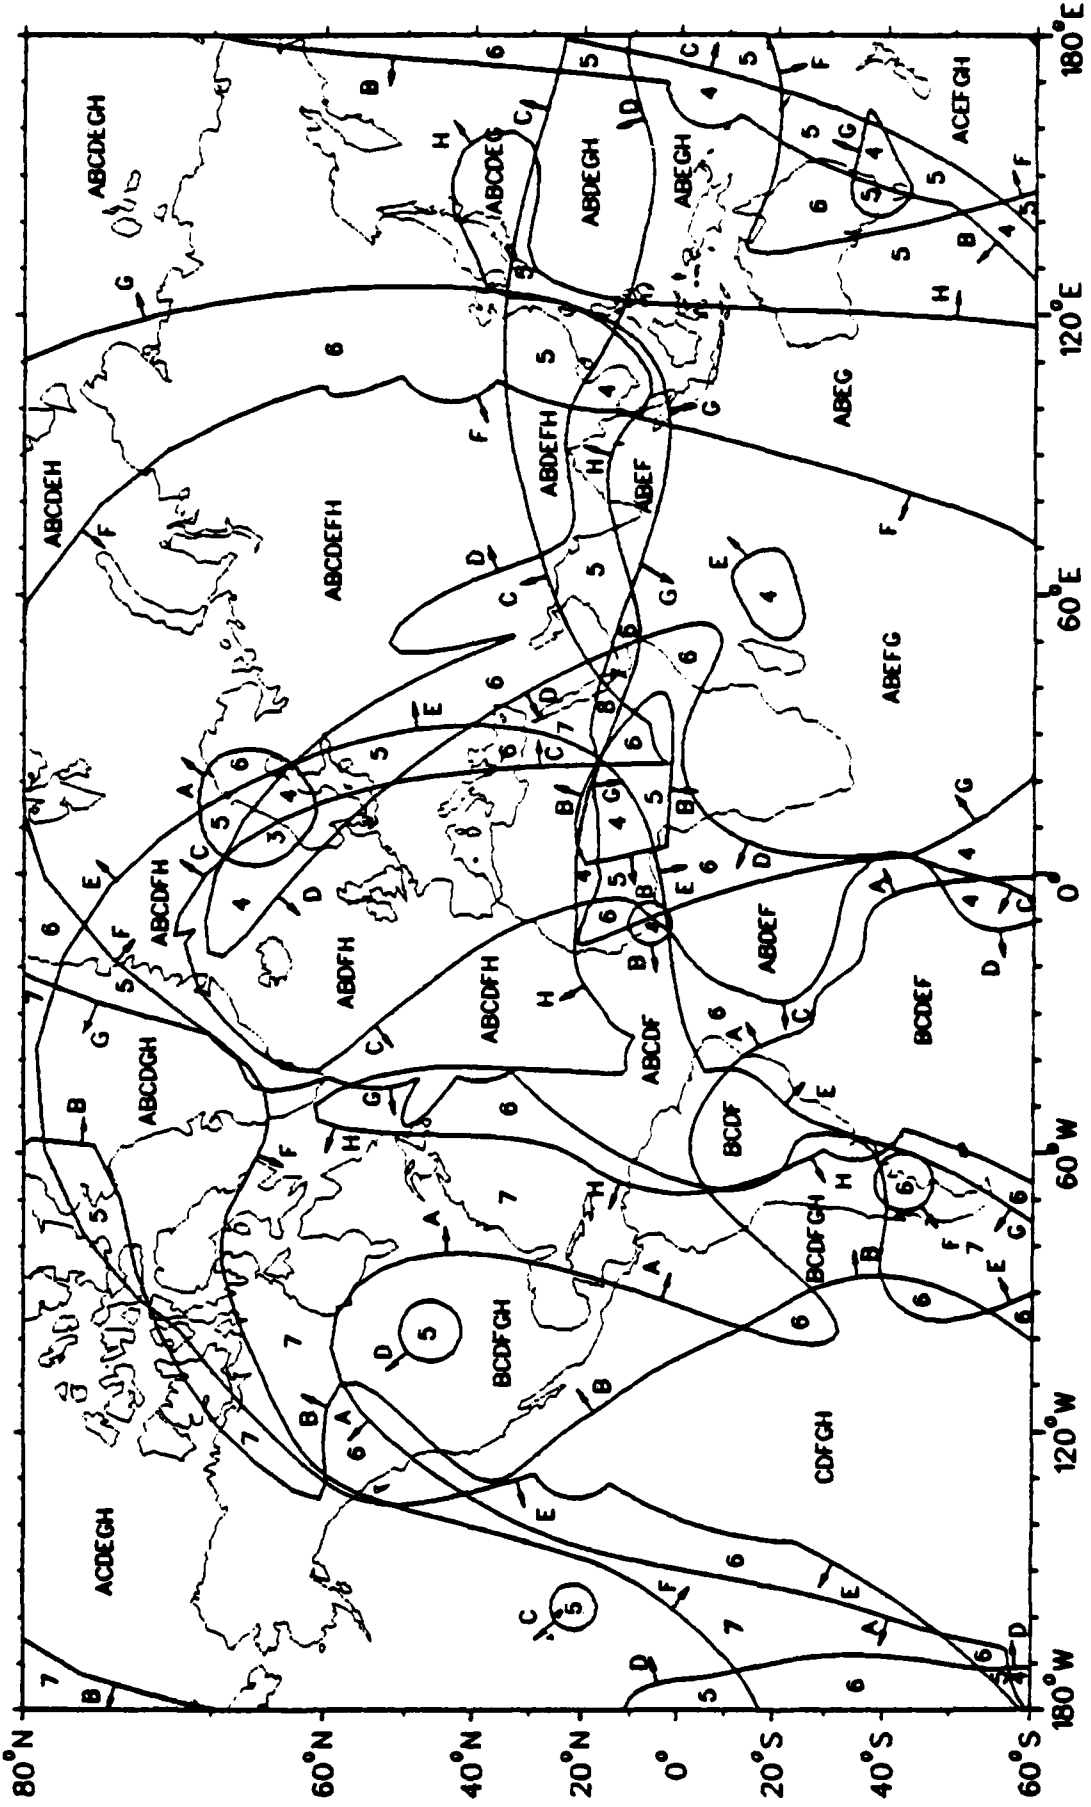


AZ EQ DIST
 (N POLE)
 -30 dB SNR
 FEBRUARY
 1800 GMT

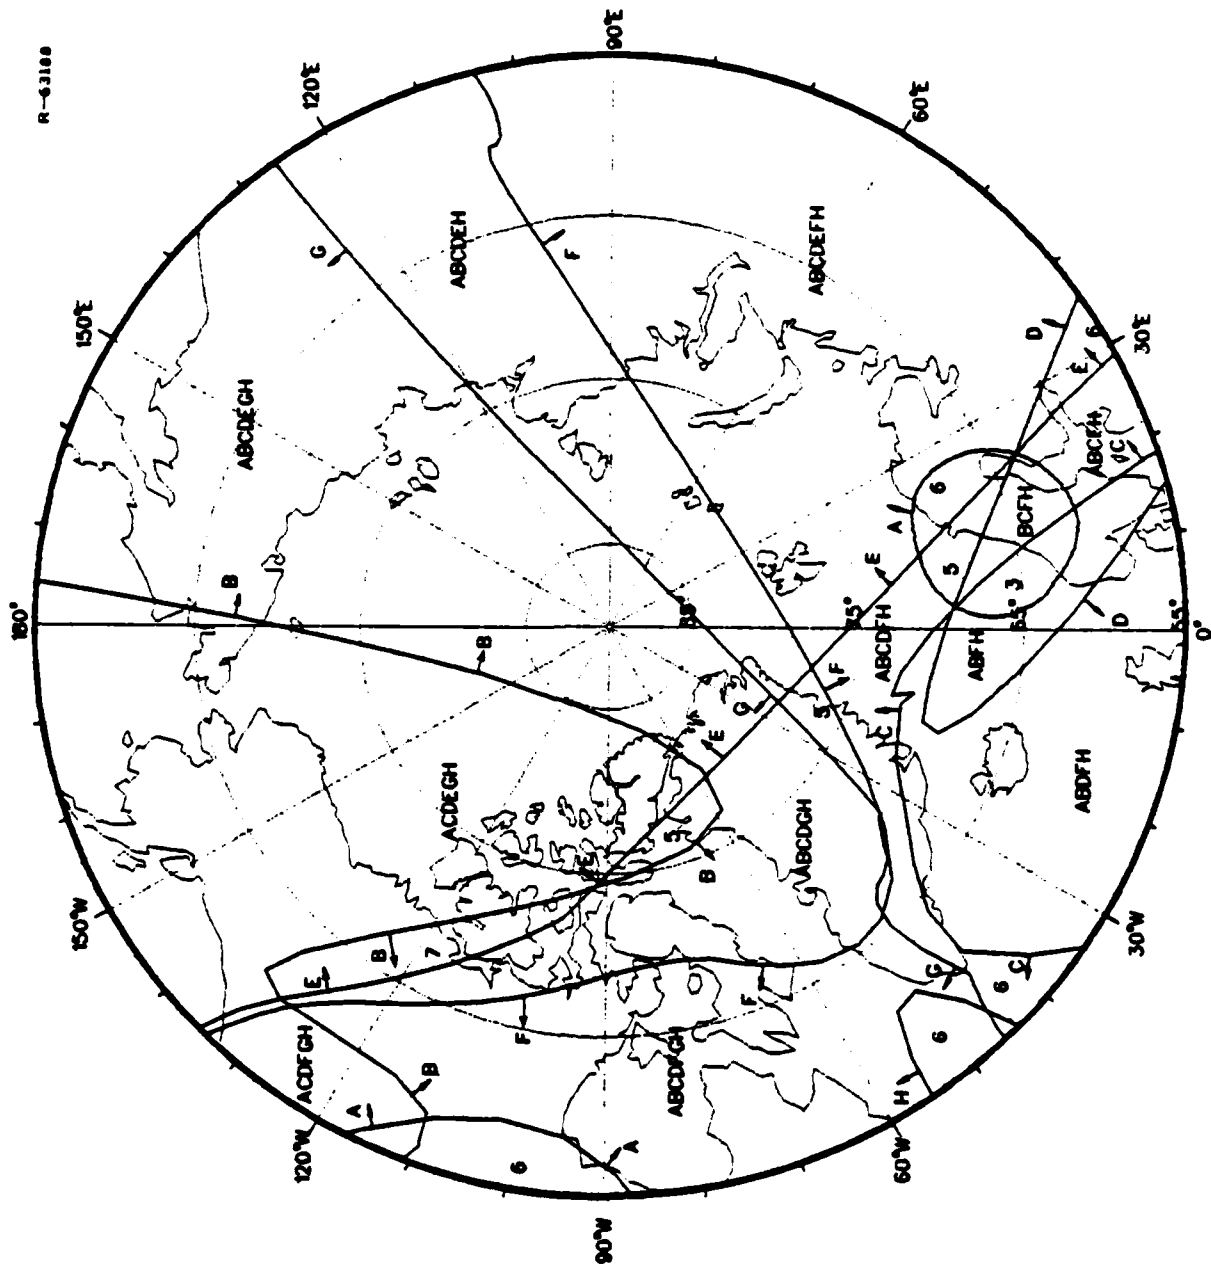

R-63100

AZ EQ DIST
(S POLE)
-30 dB SNR
FEBRUARY
1800 GMT

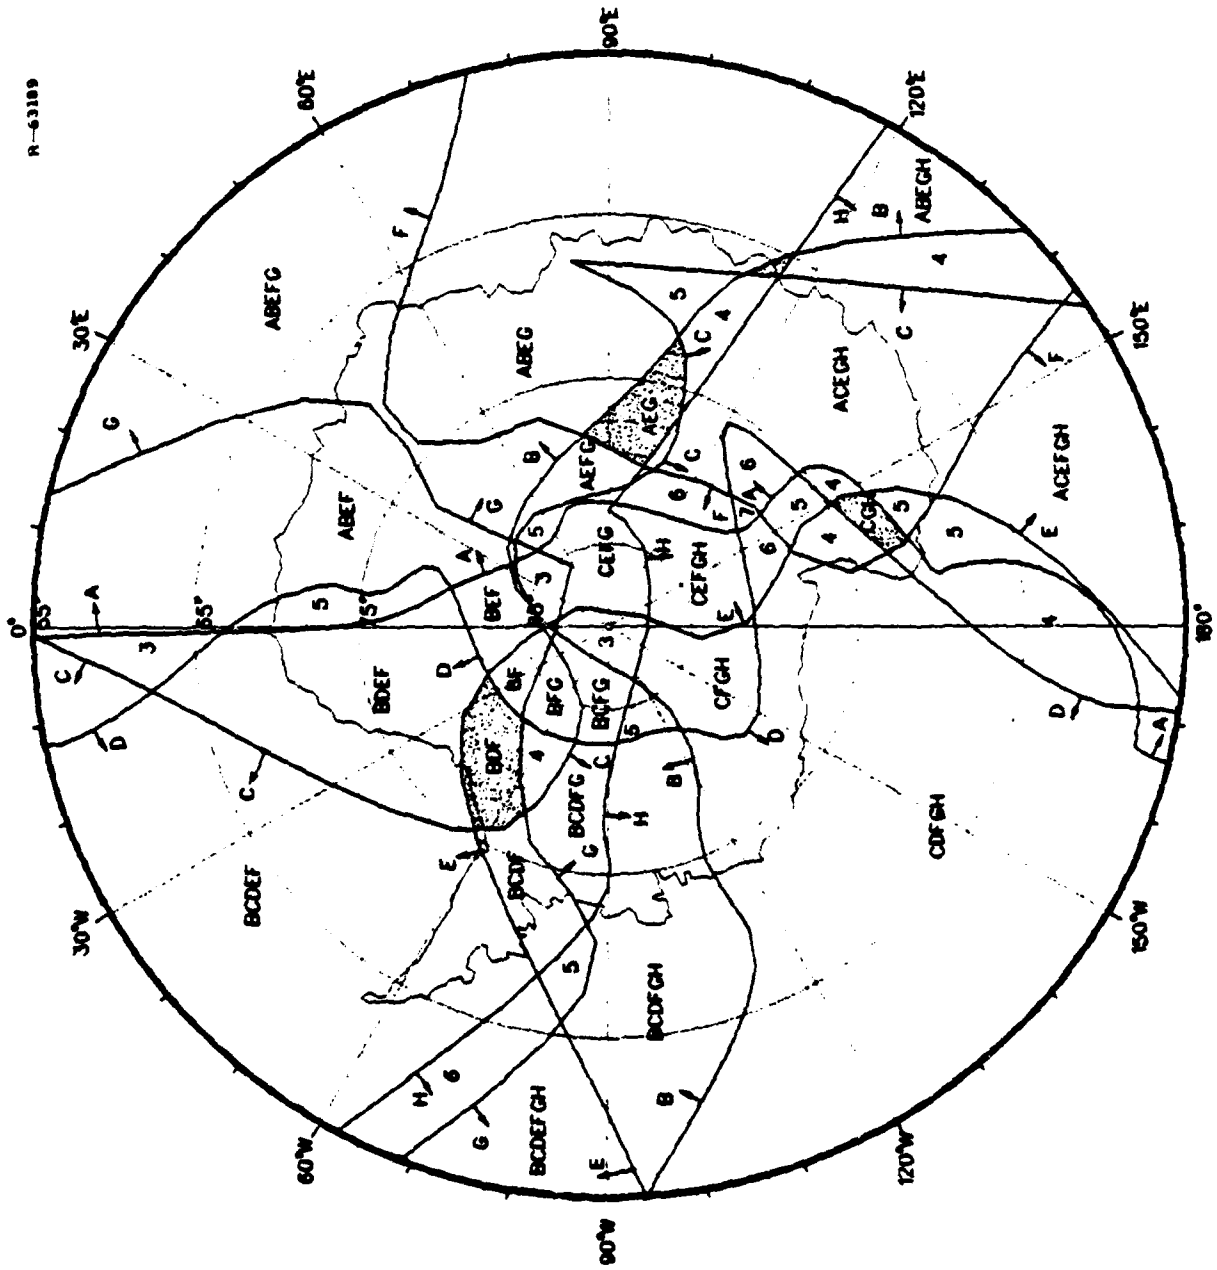


AZ EQ DIST
(S POLE)

-20 dB SNR


MAY

0600 GMT

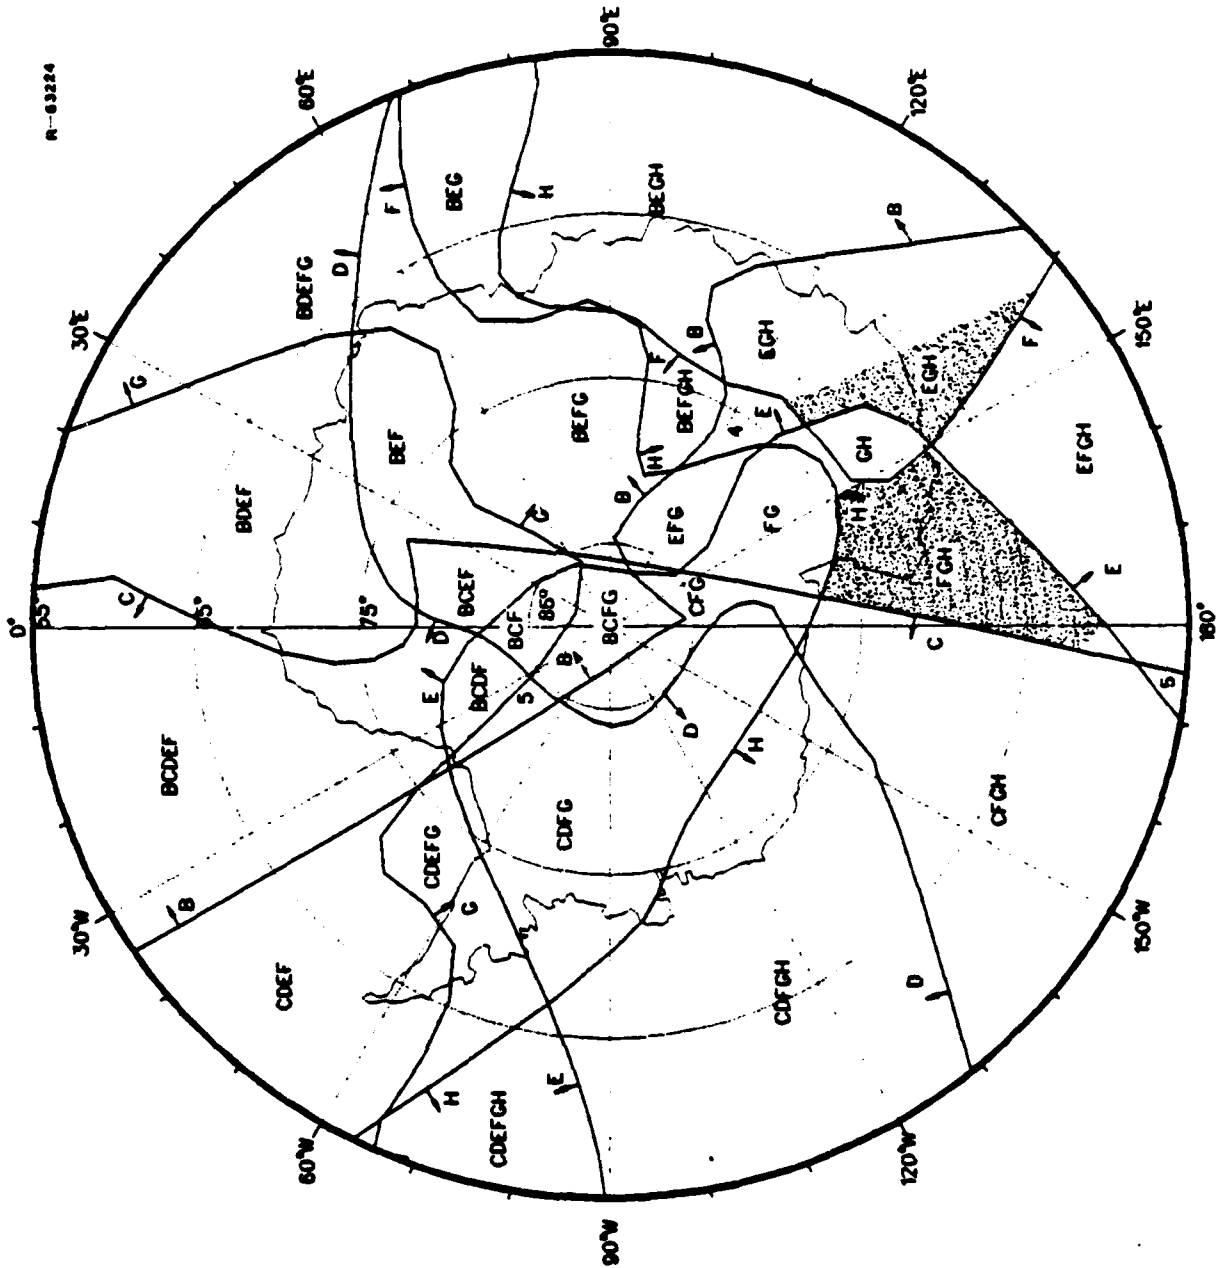


R-63224

-30 dB SNR MAY 0600 GMT

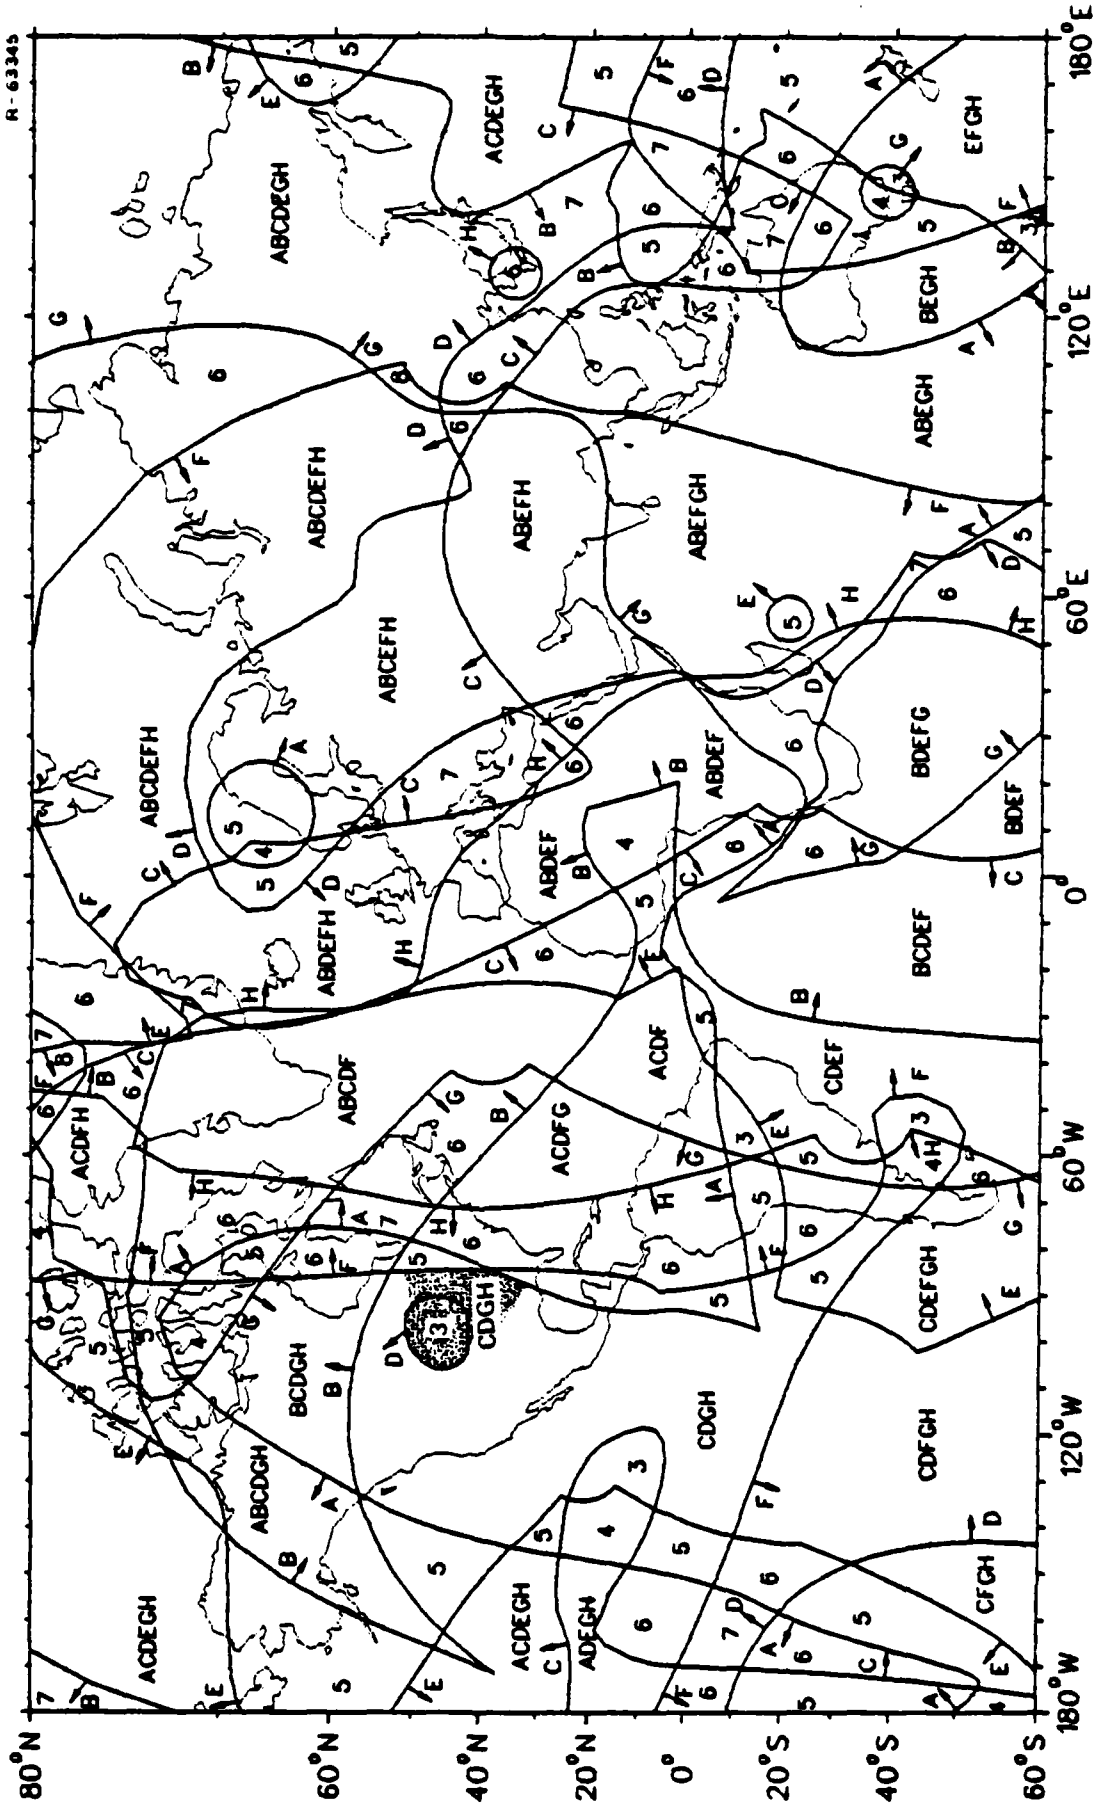


R-63345

AZ EQ DIST
 (N POLE)
 -30 dB SNR
 MAY
 0600 GMT

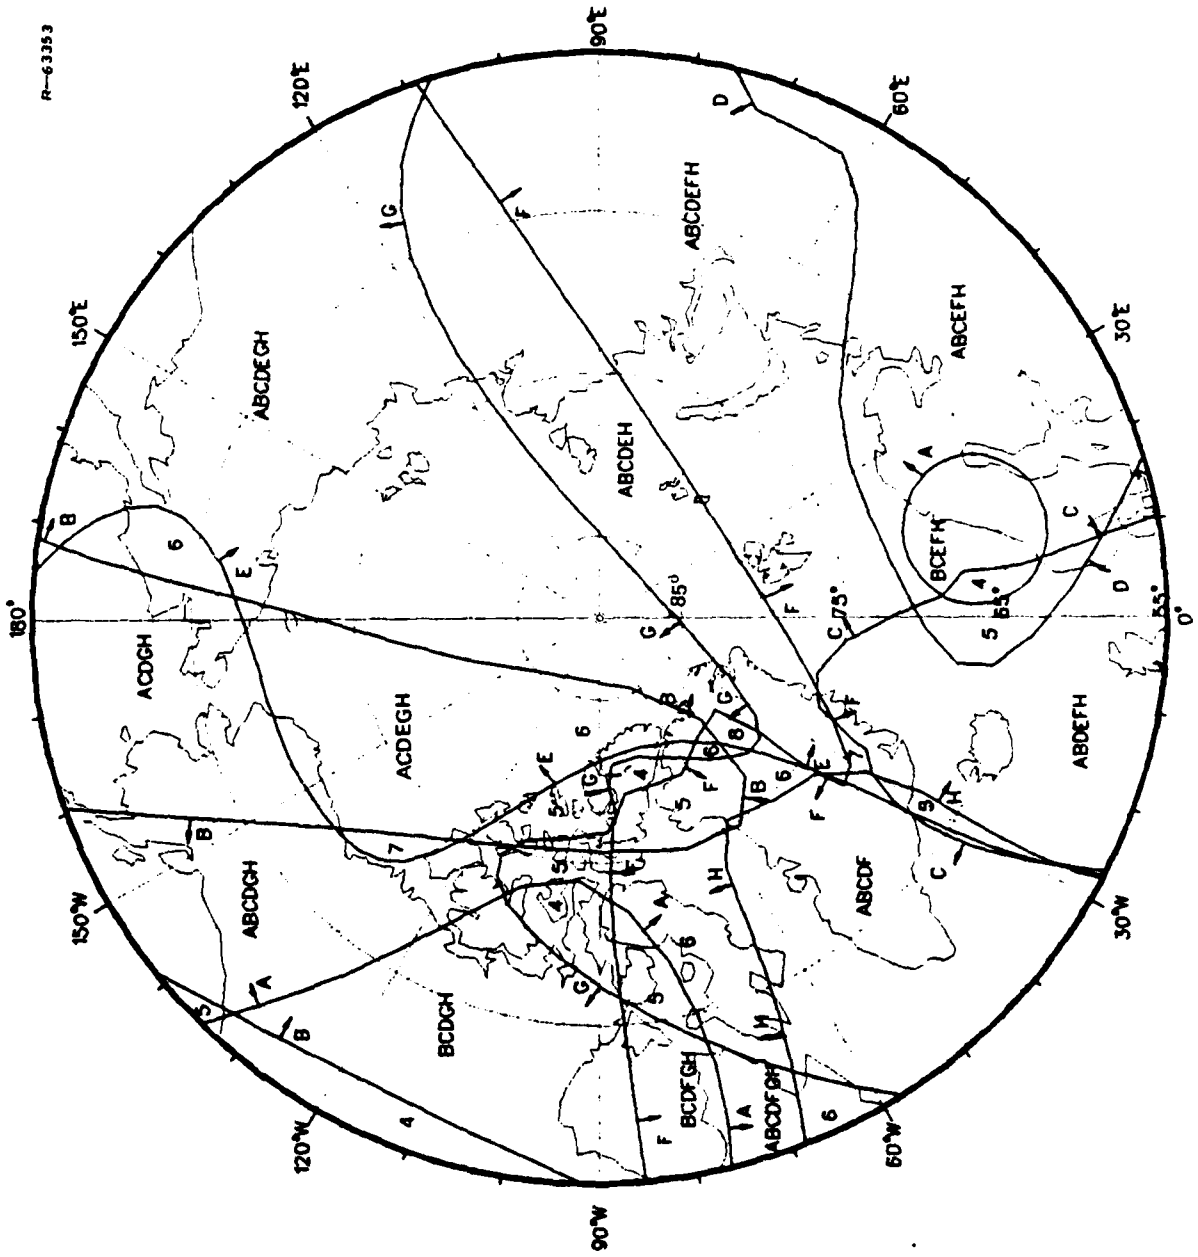


AZ EQ DIST
 (S POLE)
 -30 dB SNR
 MAY
 0600 GMT

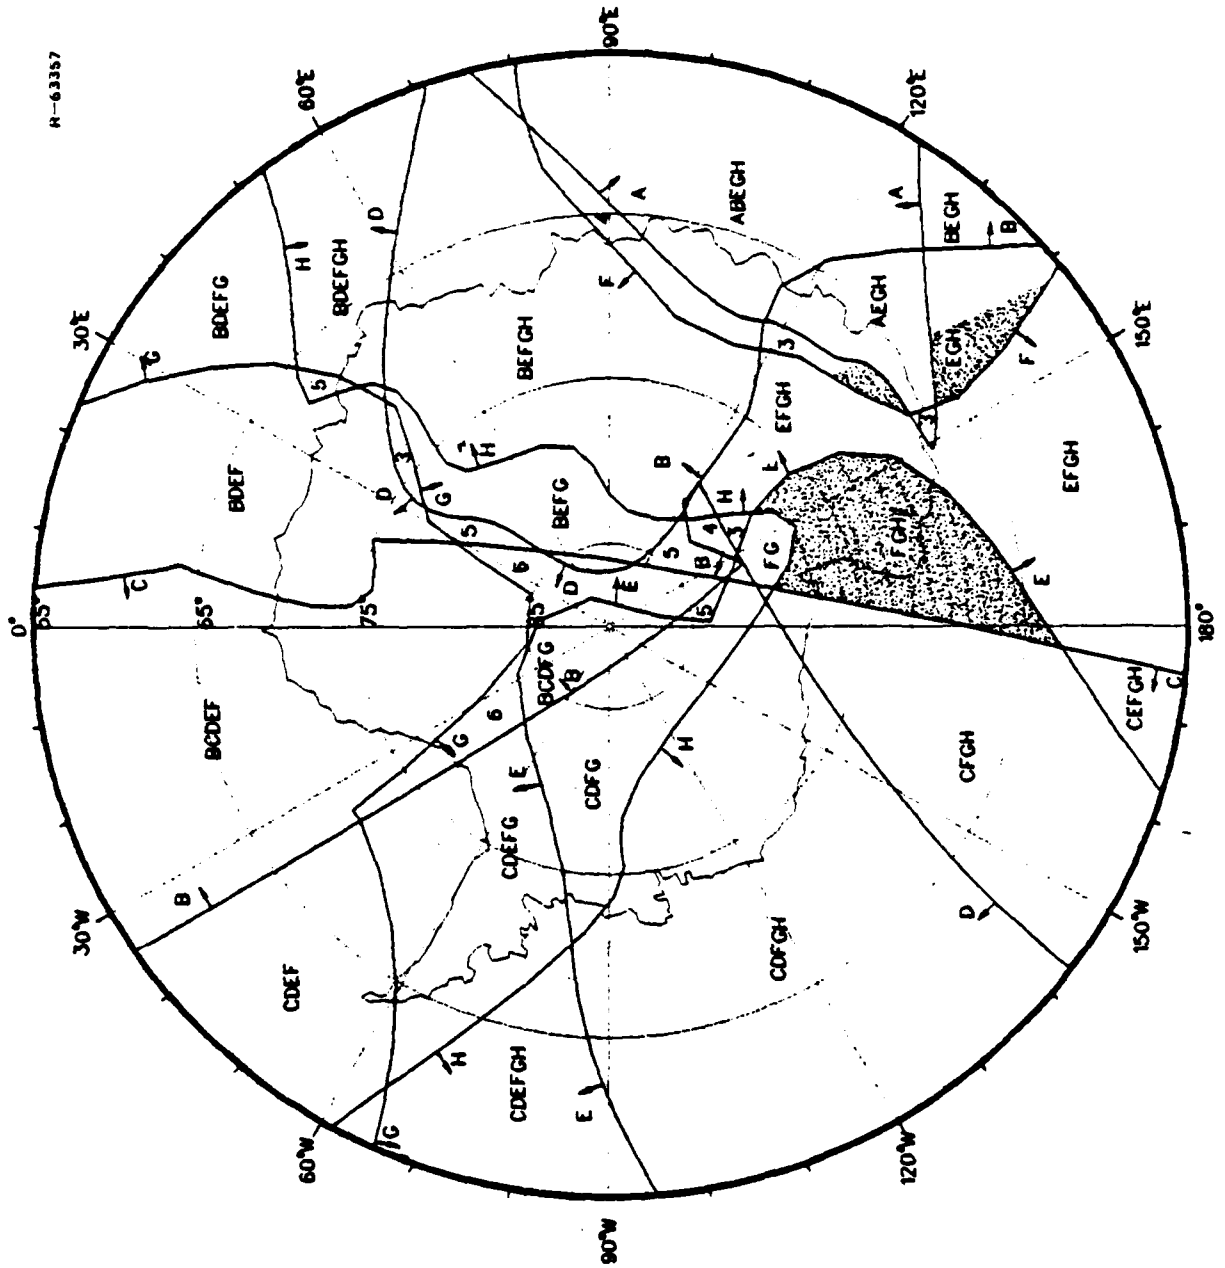


R-63357

-20 dB SNR MAY 1800 GMT

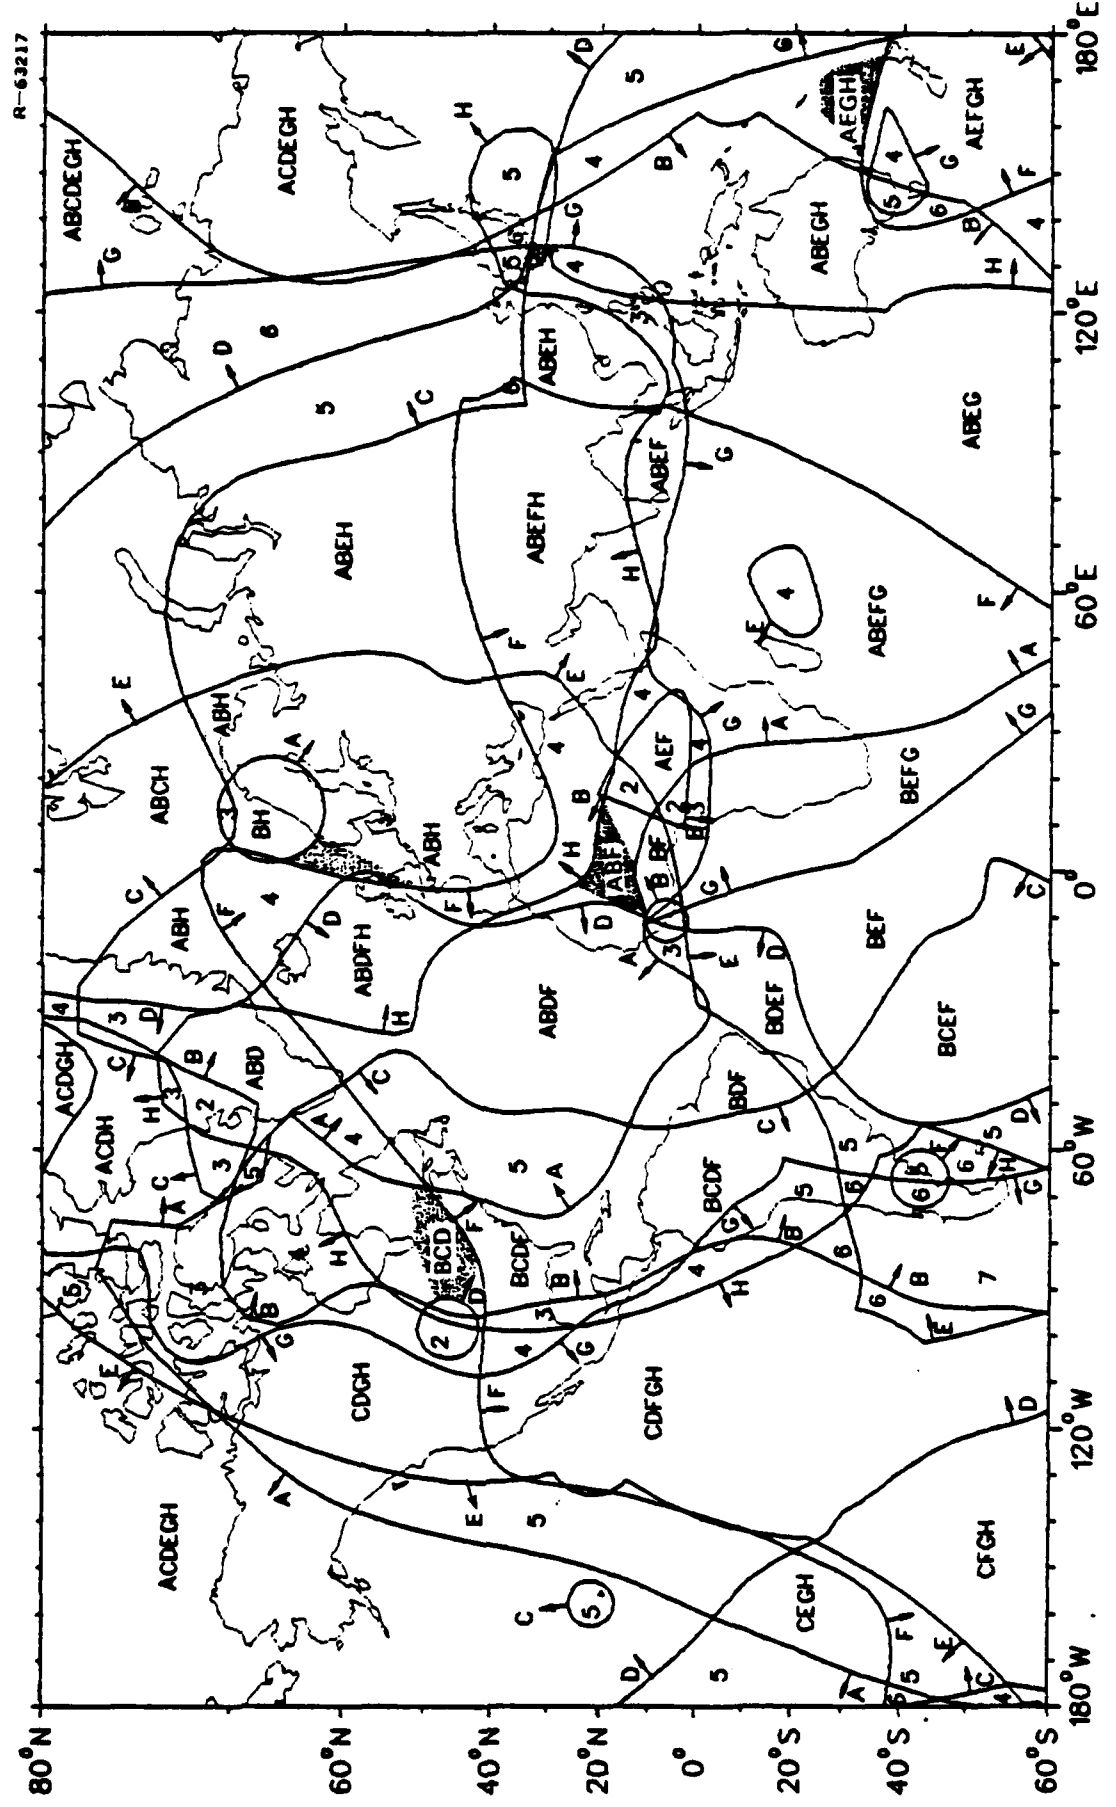


AZ EQ DIST
 (S POLE)
 -20 dB SNR
 MAY
 1800 GMT

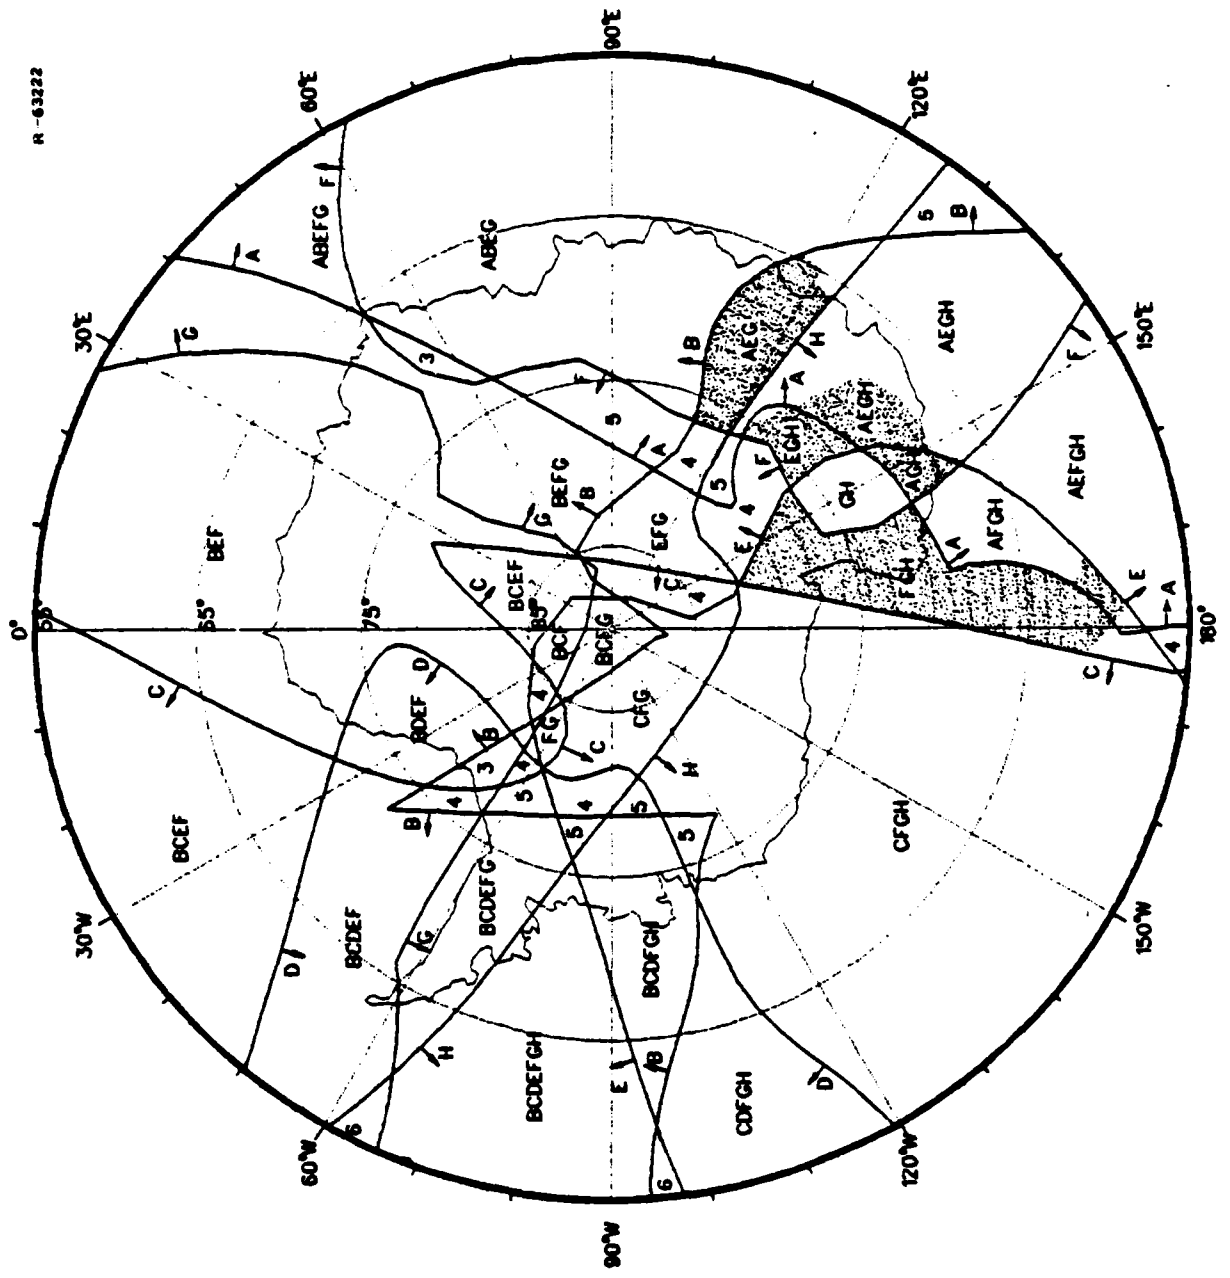

R-63222

-30 dB SNR MAY 1800 GMT

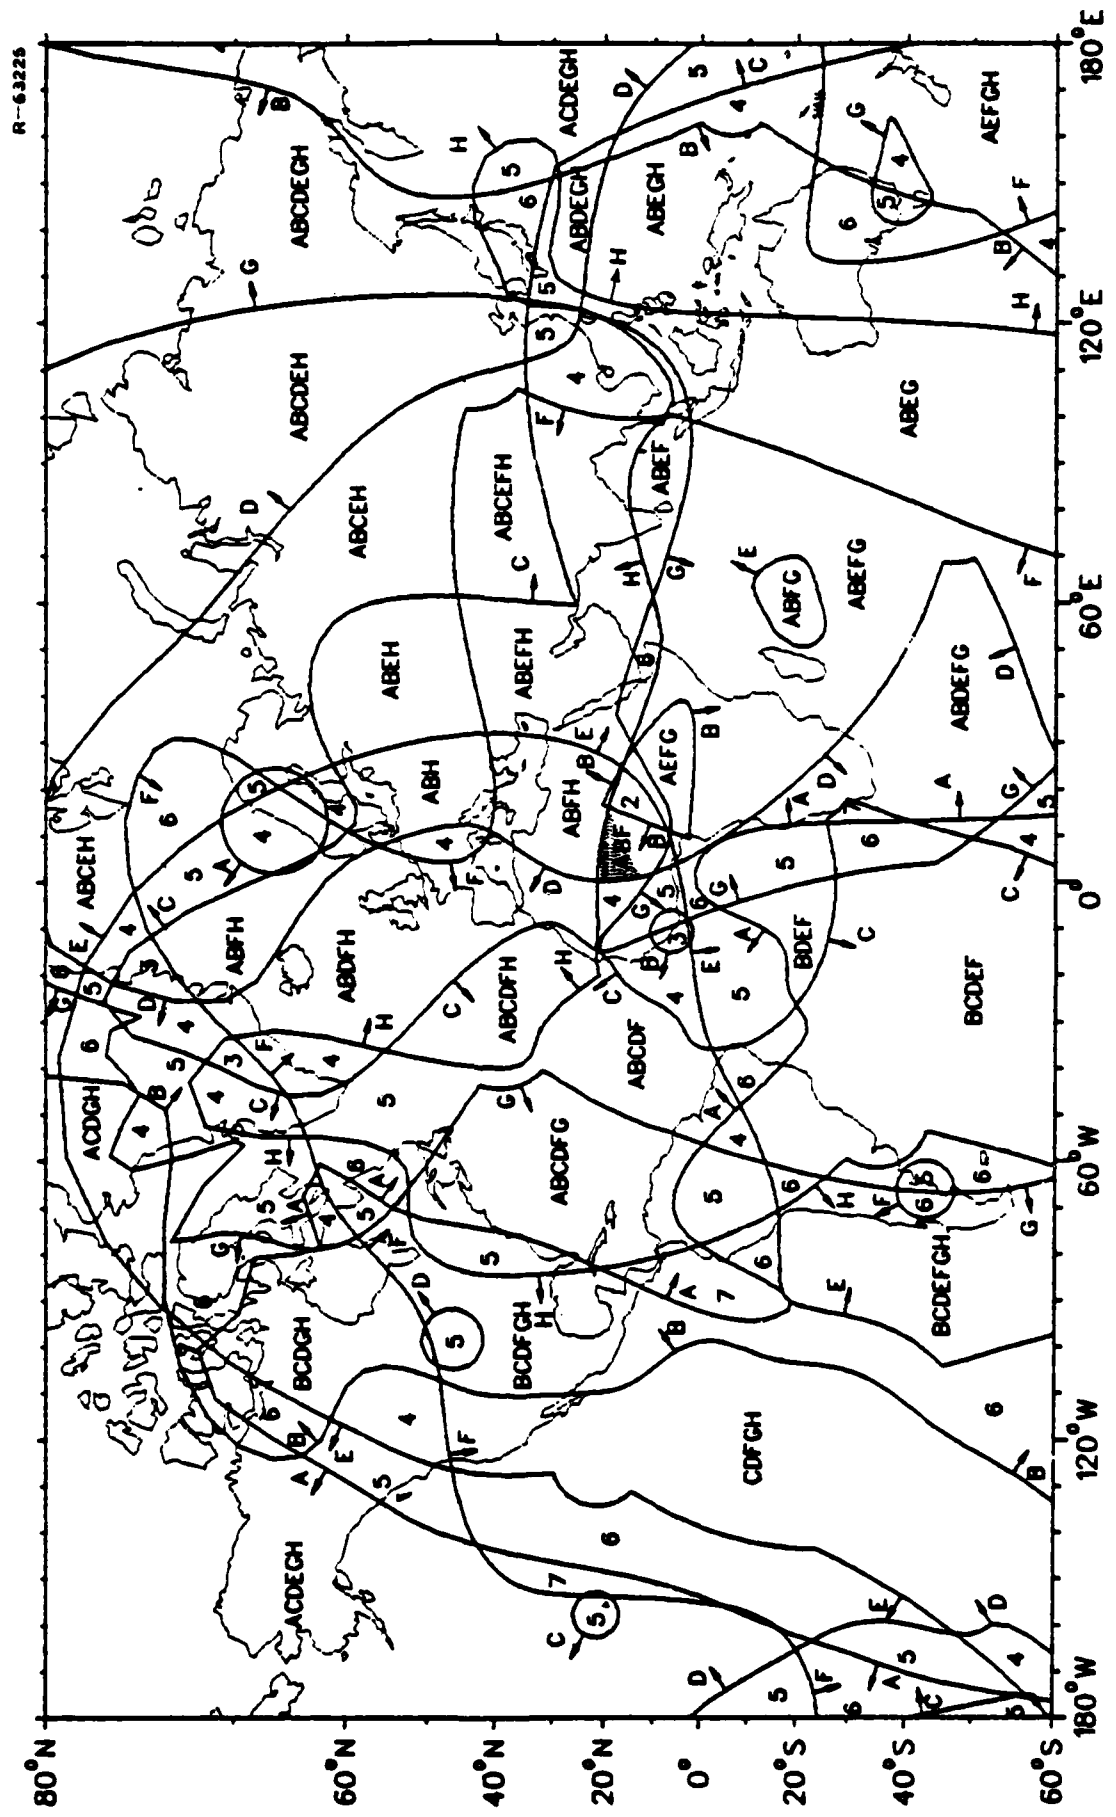


AZ EQ DIST
(N POLE)

-30 dB SNR

MAY

1800 GMT

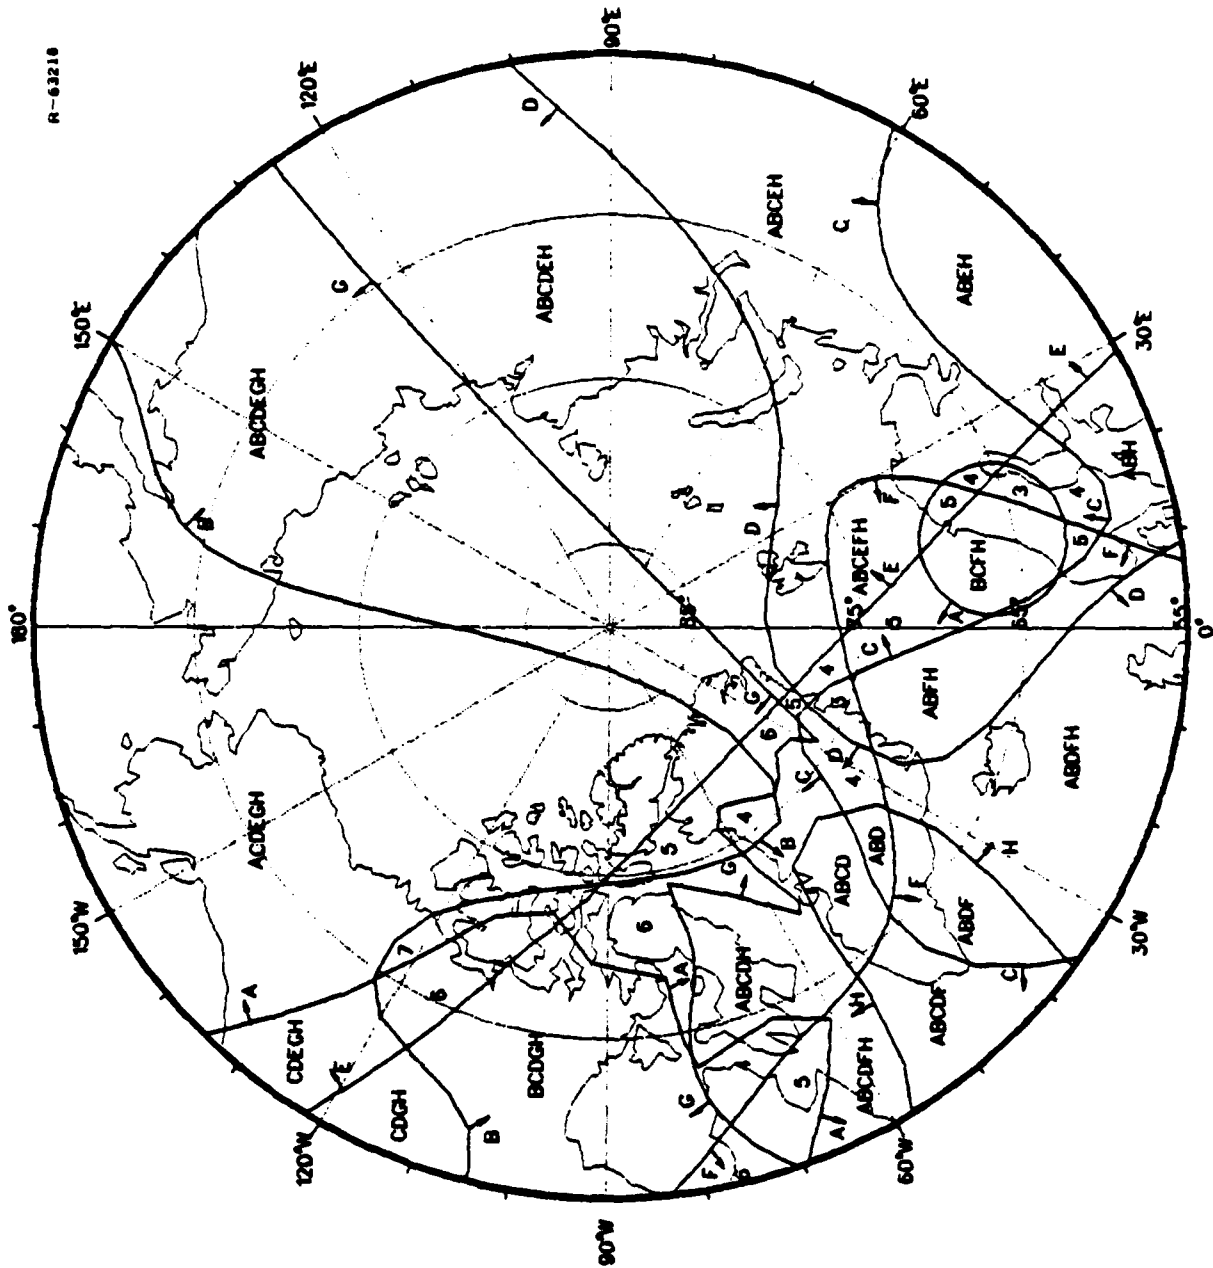


R-63216

AZ EQ DIST
(S POLE)

-30 dB SNR

MAY


1800 GMT

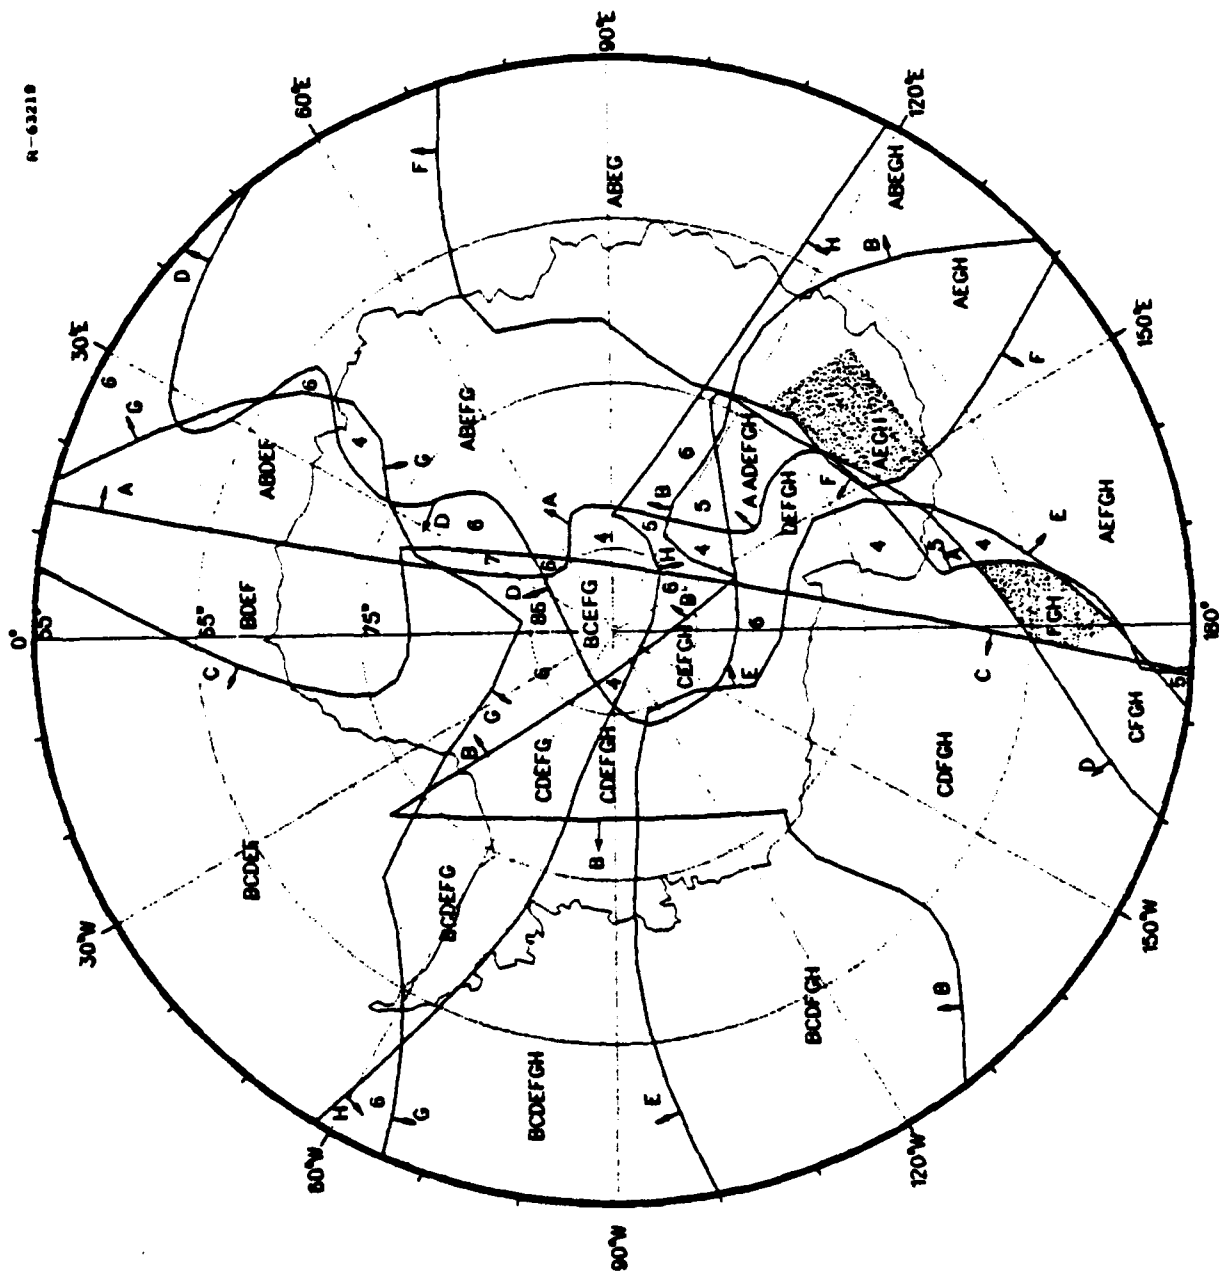


R-63218

-20 dB SNR AUGUST 0600 GMT

R-63076

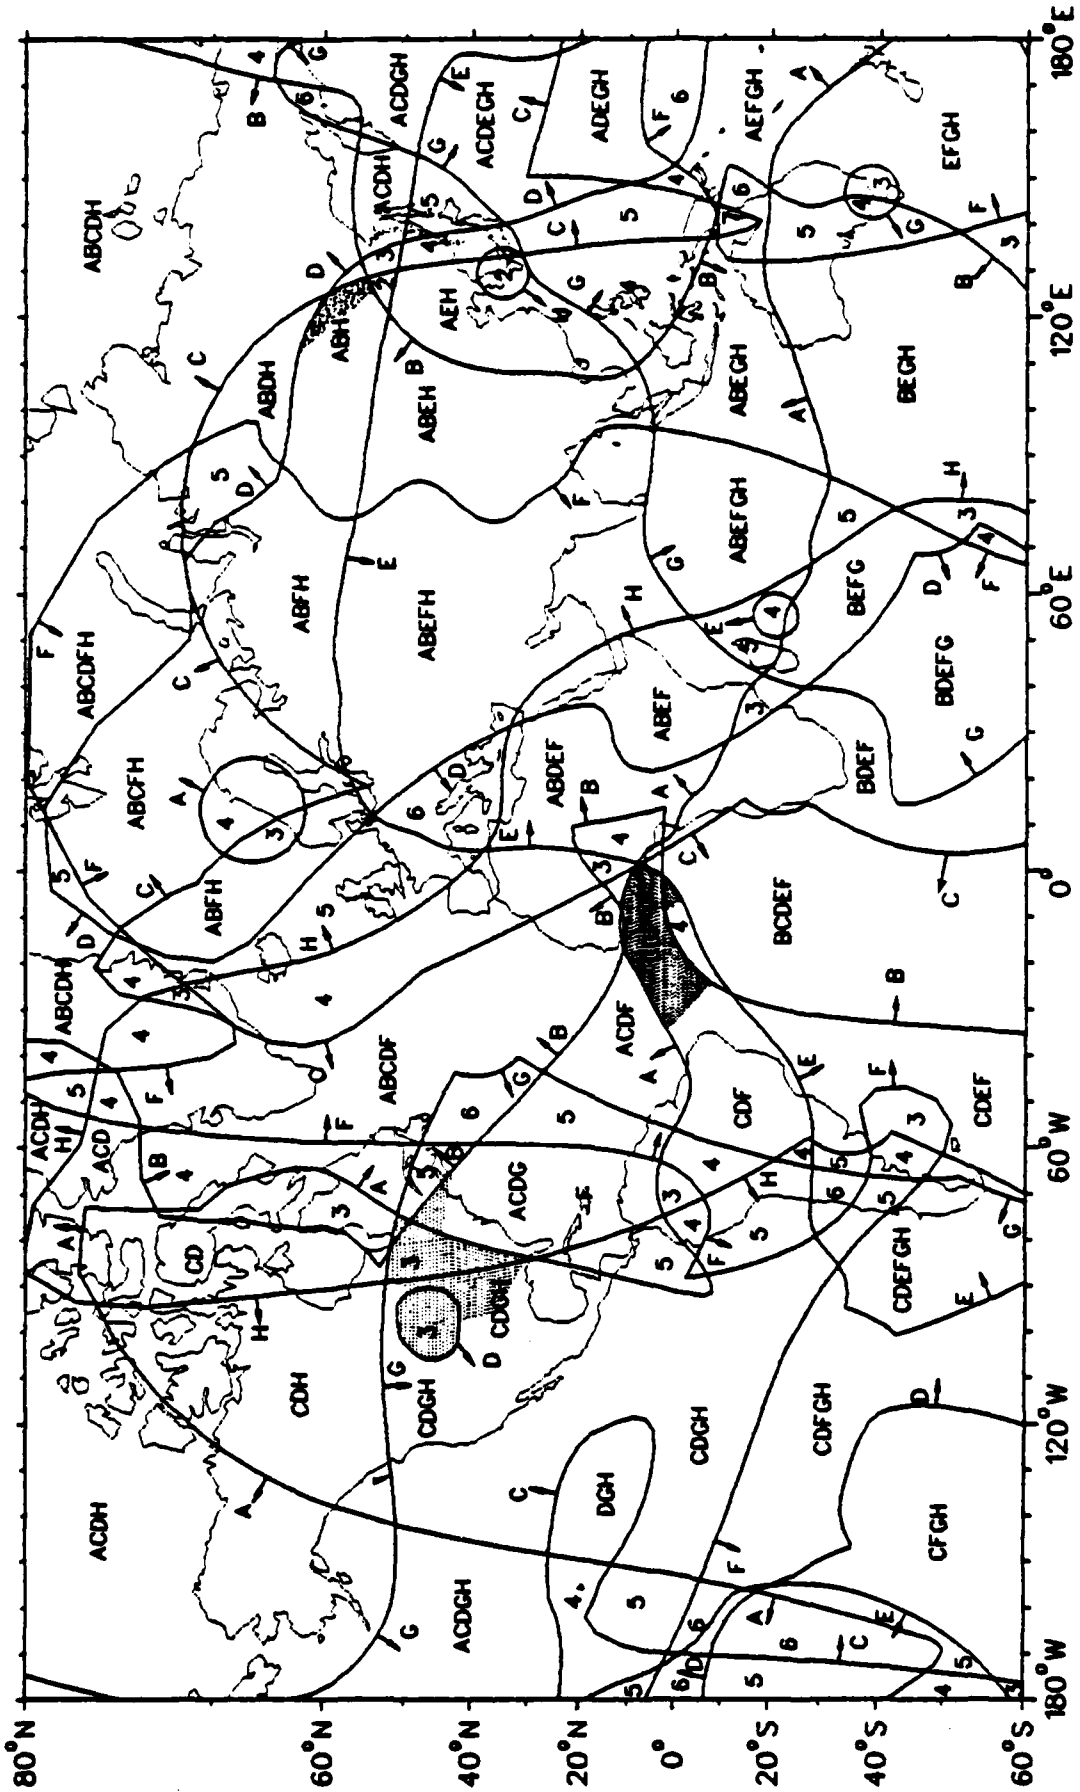


AZ EQ DIST
 (S POLE)
 -20 dB SNR
 AUGUST
 06000 GMT

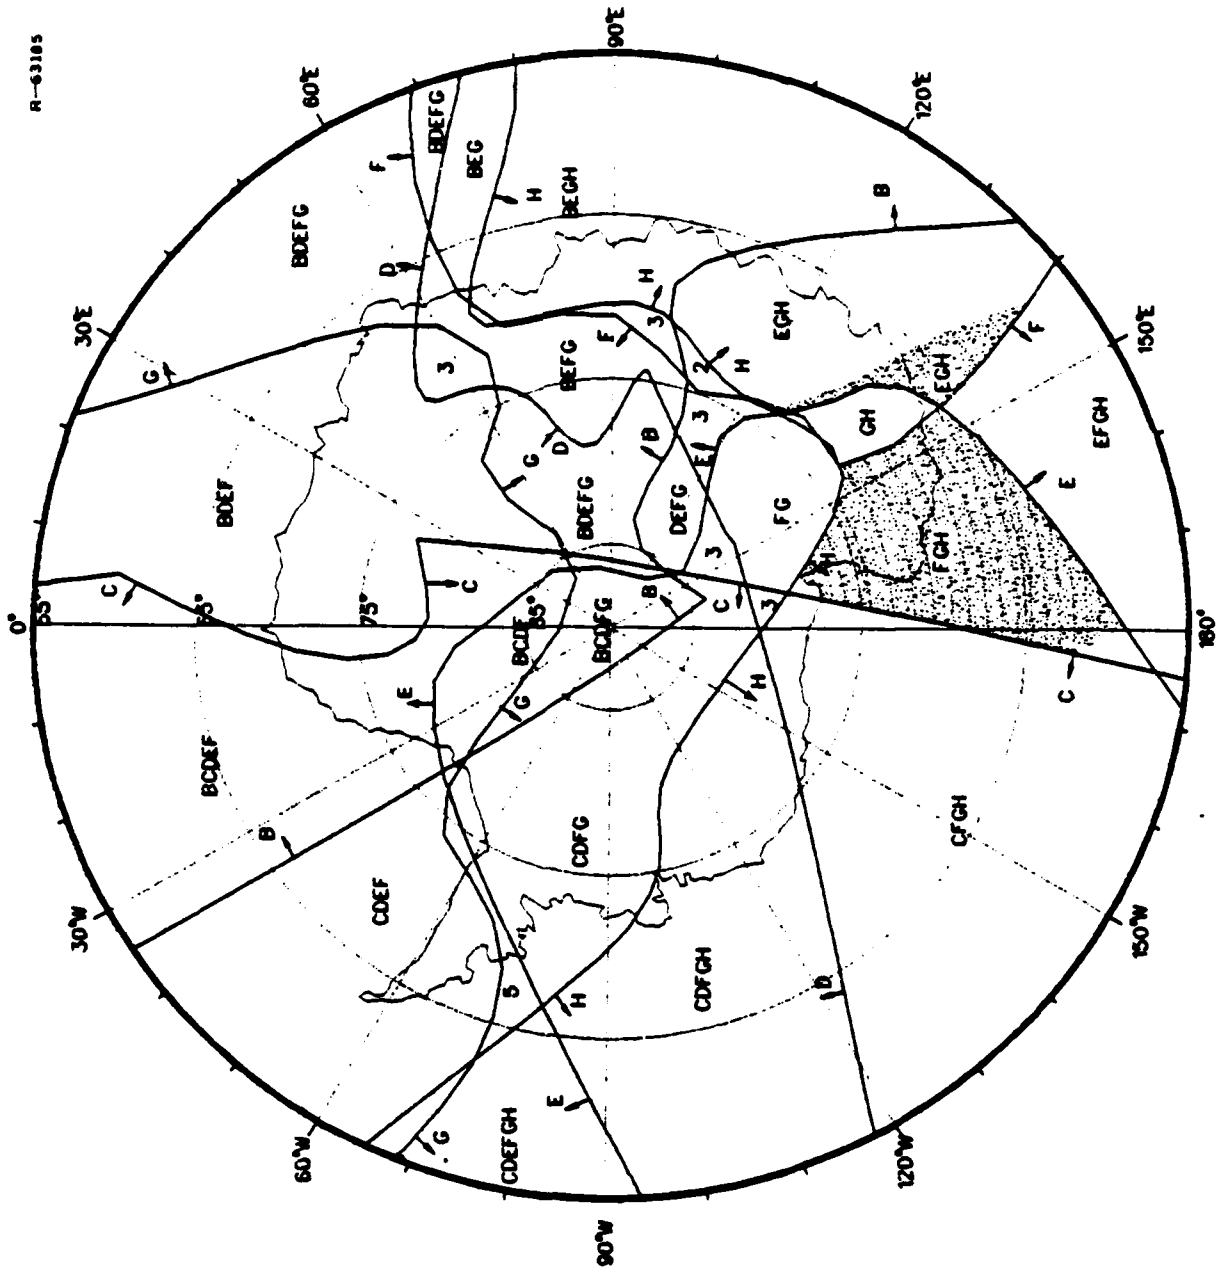


R-43105

AZ EQ DIST
 (N POLE)
 -30 dB SNR
 AUGUST
 0600 GMT

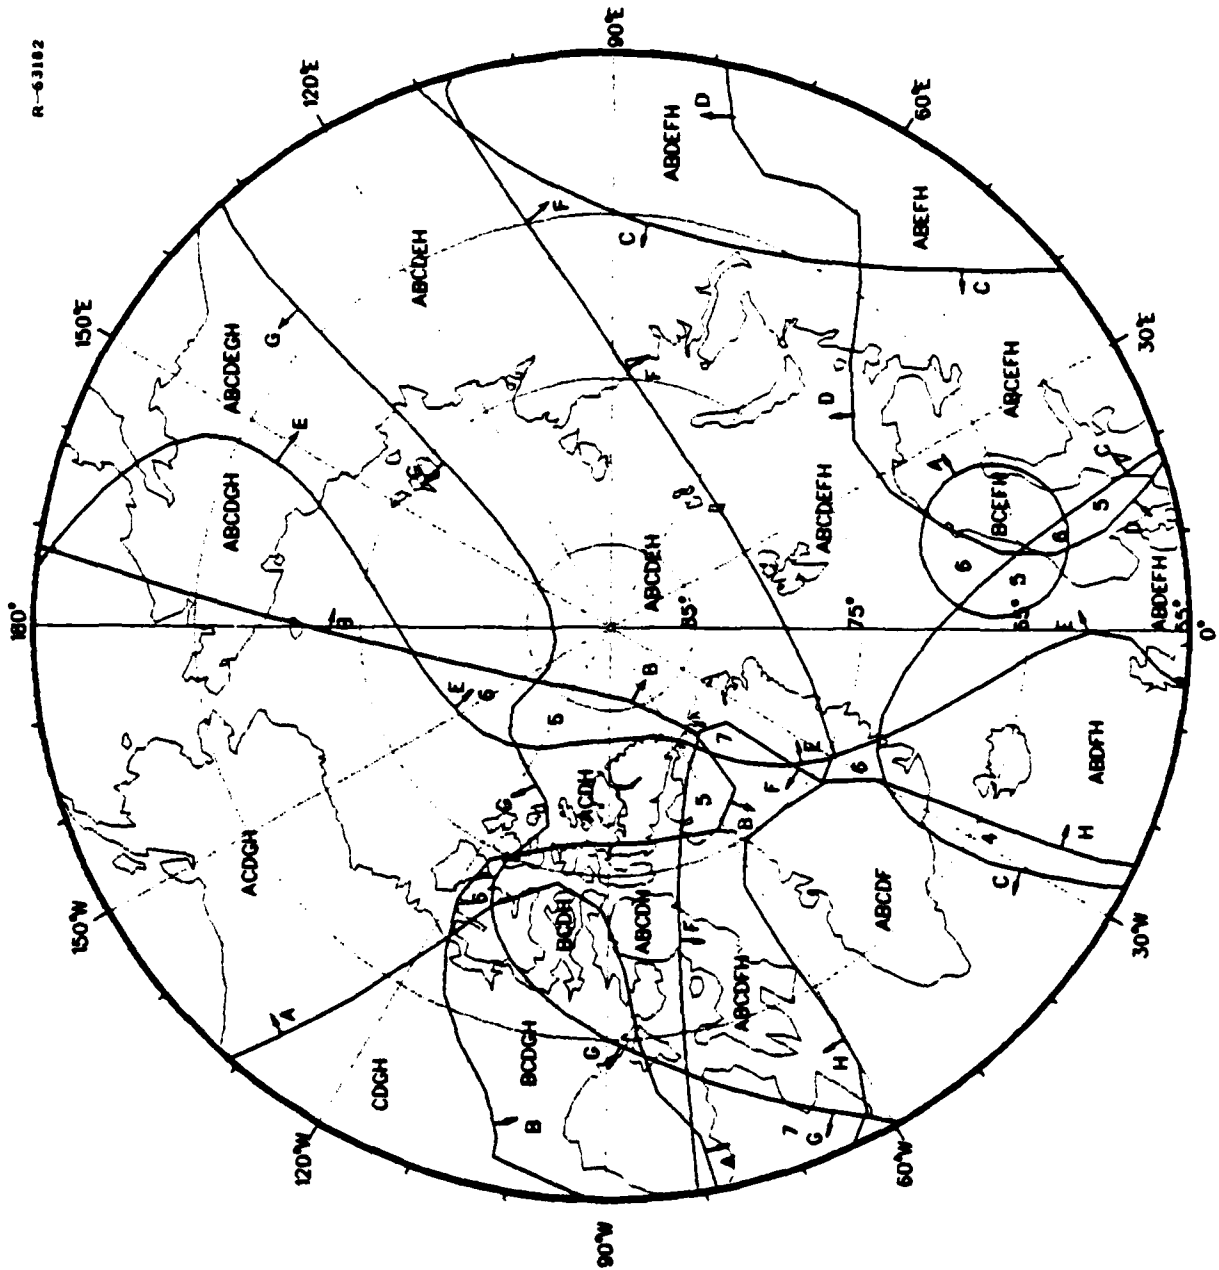


R-63182

AZ EQ DIST
 (S POLE)
 -30 dB SNR
 AUGUST
 0600 GMT

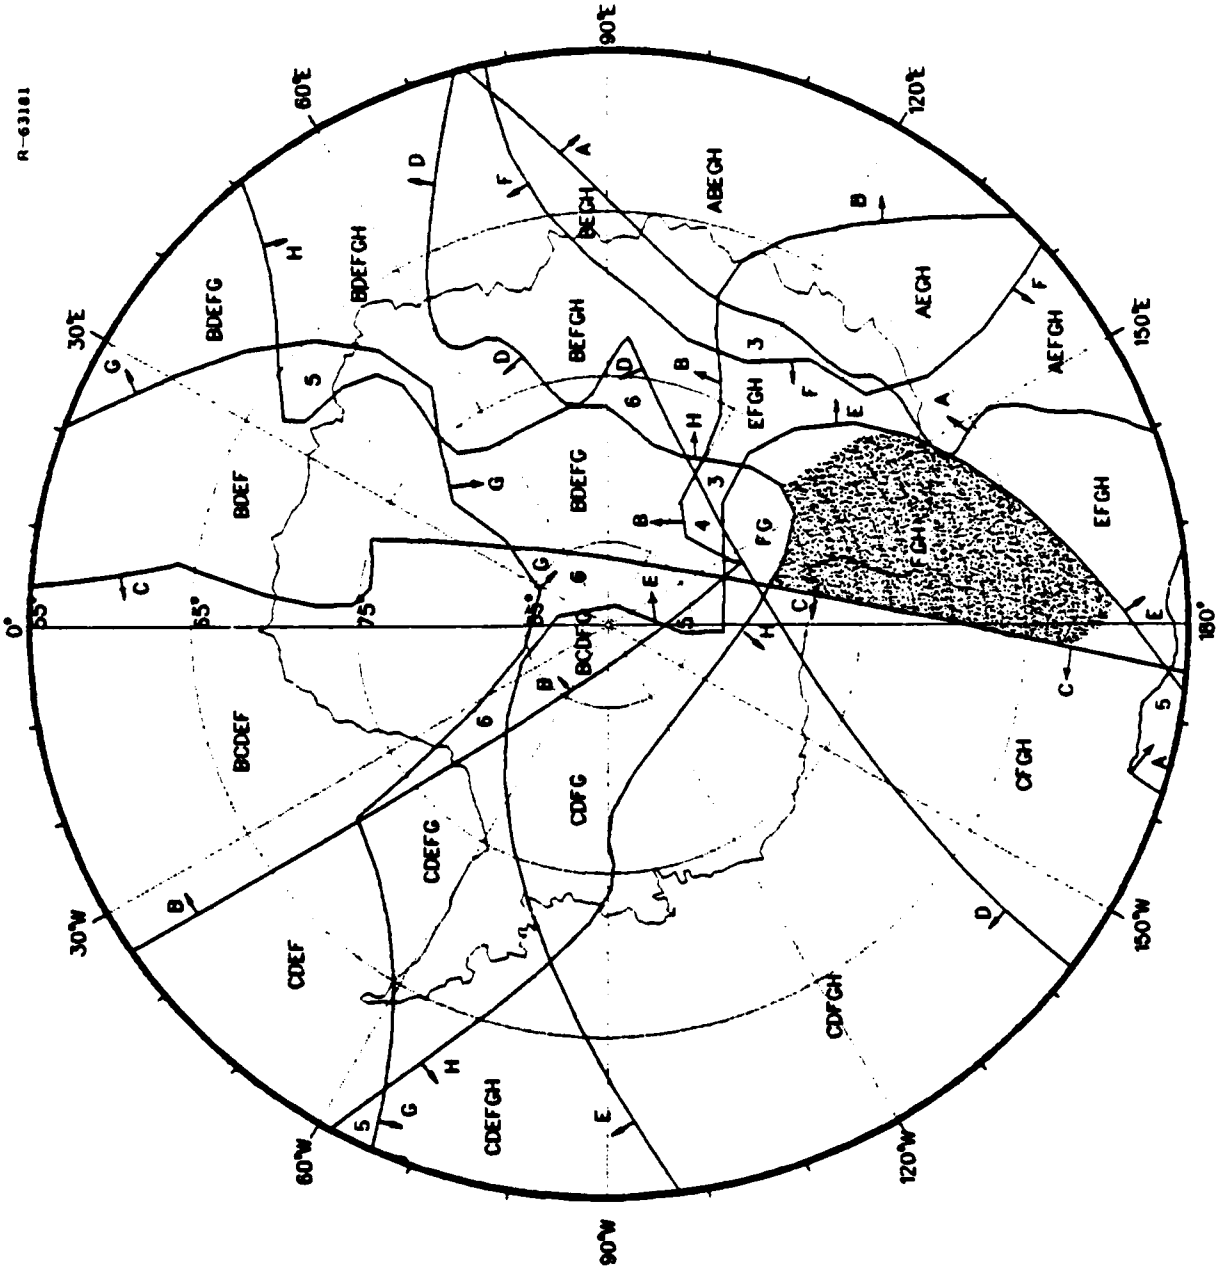

R-63101

-20 dB SNR AUGUST 1800 GMT

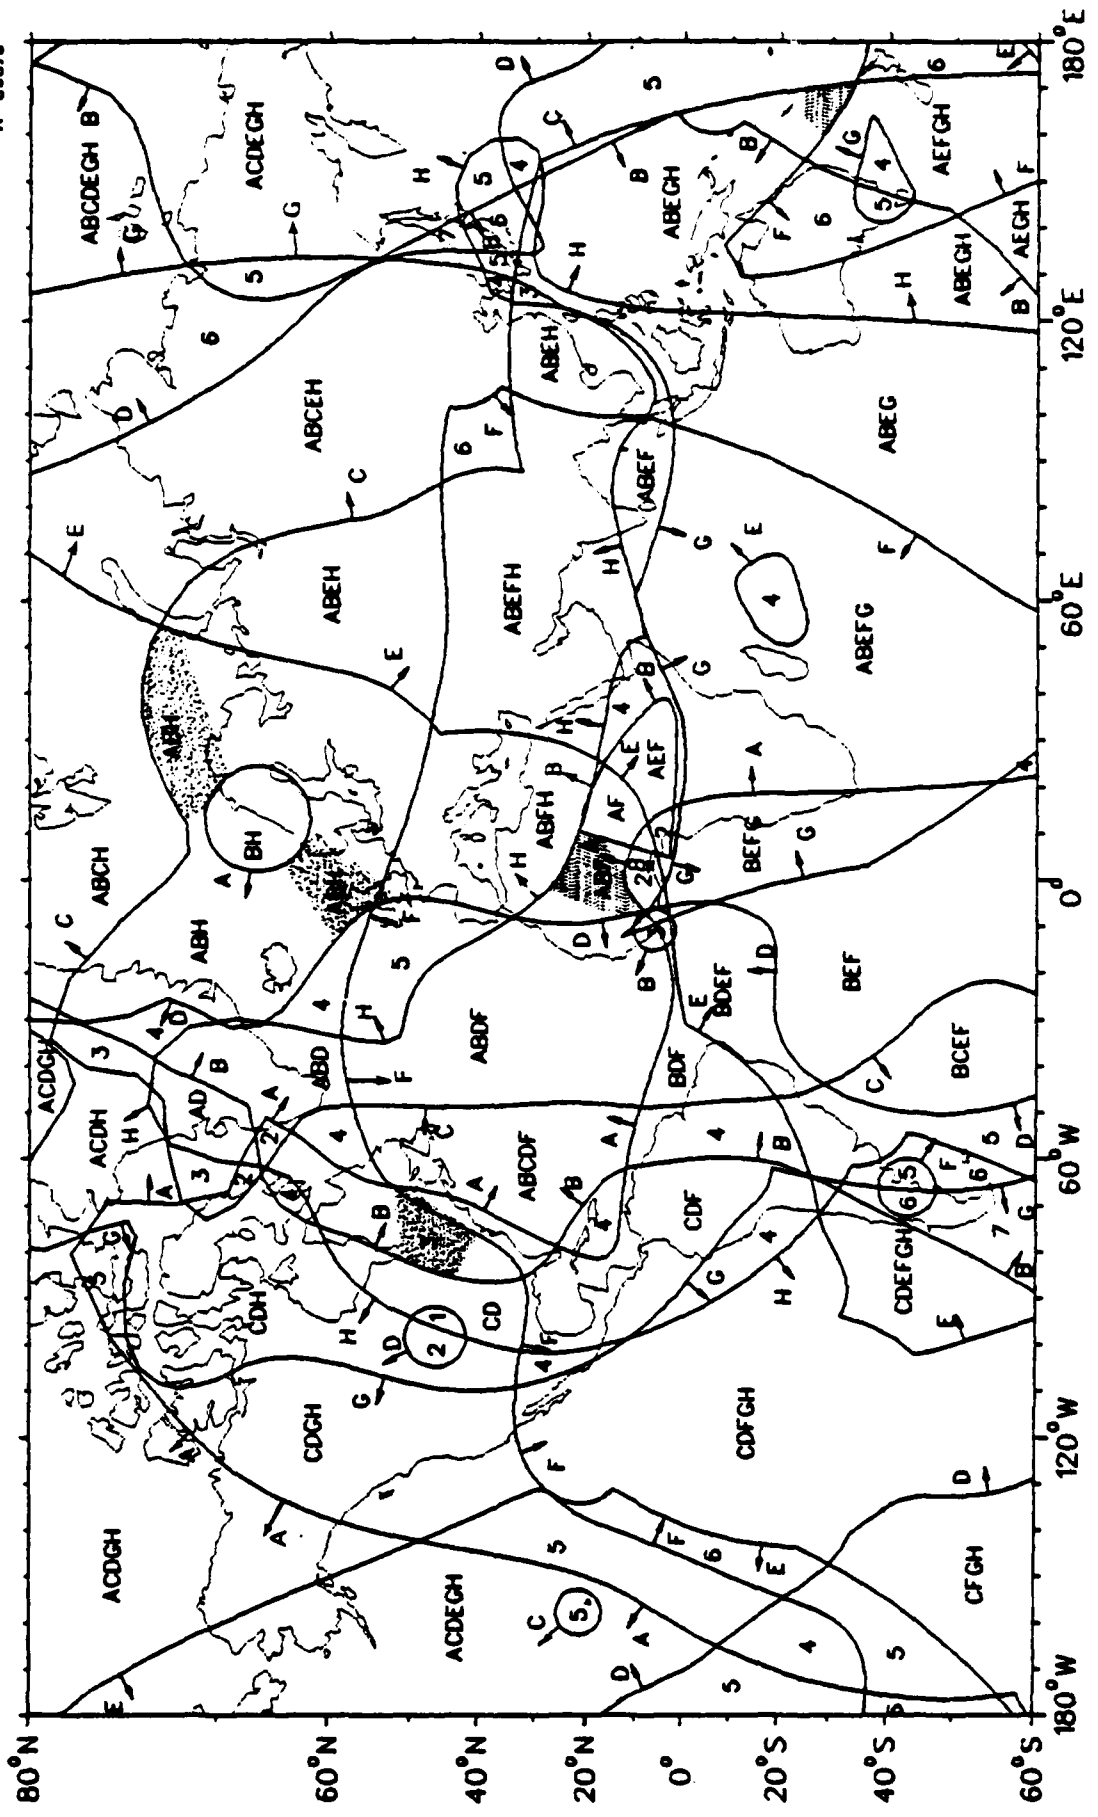


AZ. EQ DIST
(N POLE)

-20 dB SNR


AUGUST

1800 GMT

R-63184

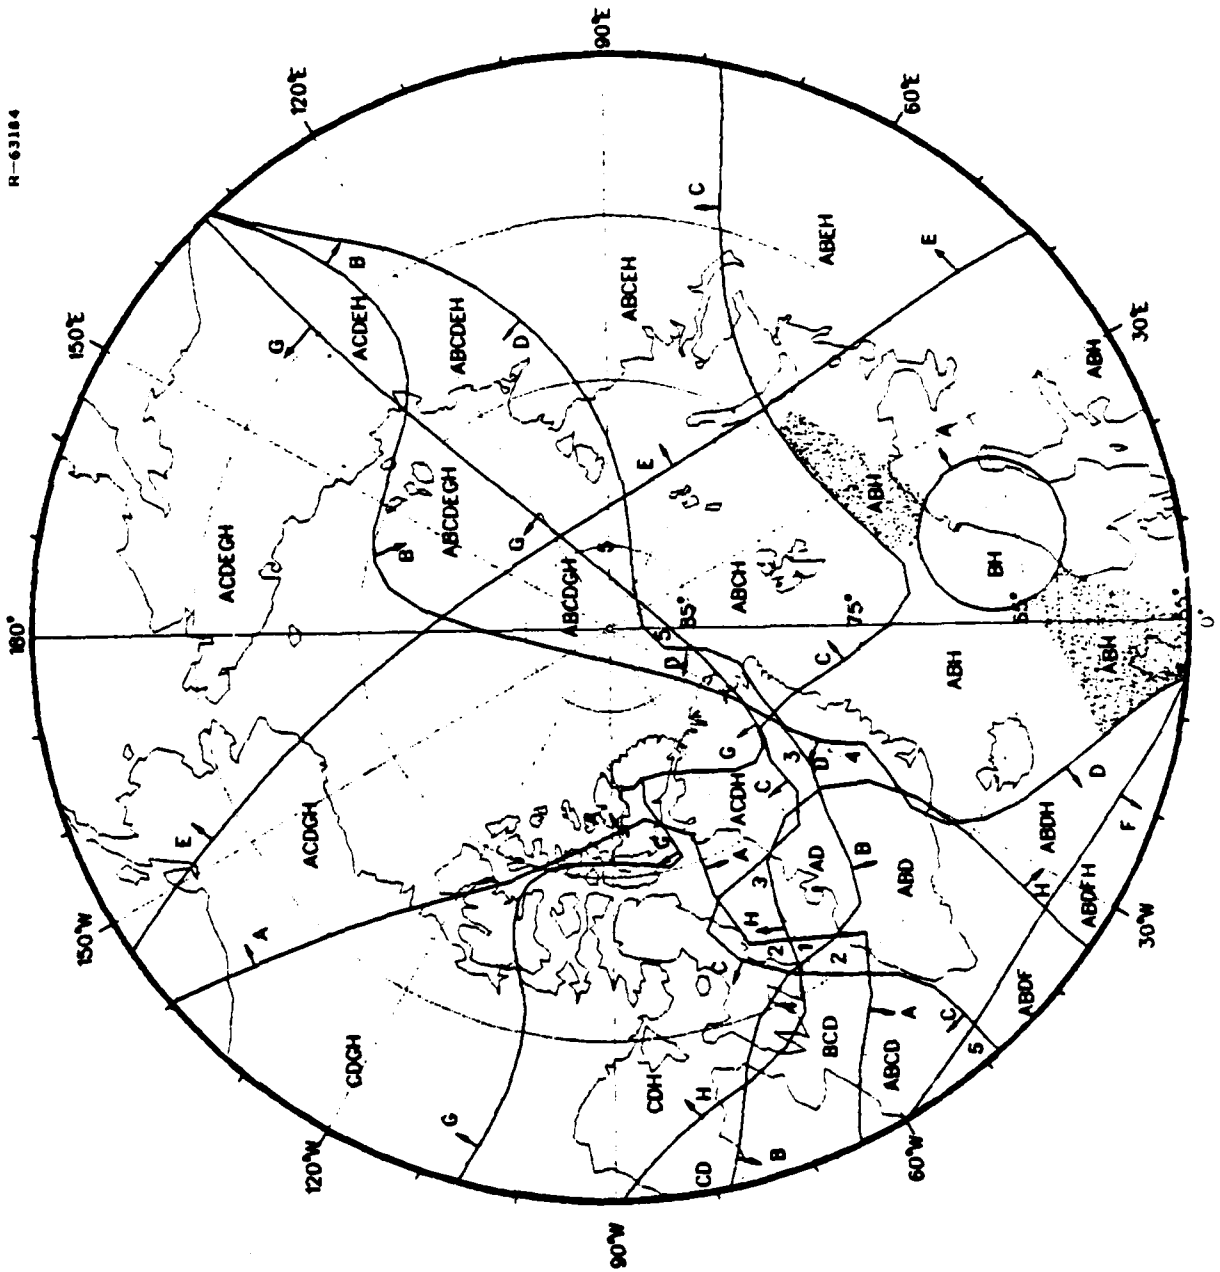


AZ EQ DIST
 (S POLE)
 -20 dB SNR
 AUGUST
 1800 GMT

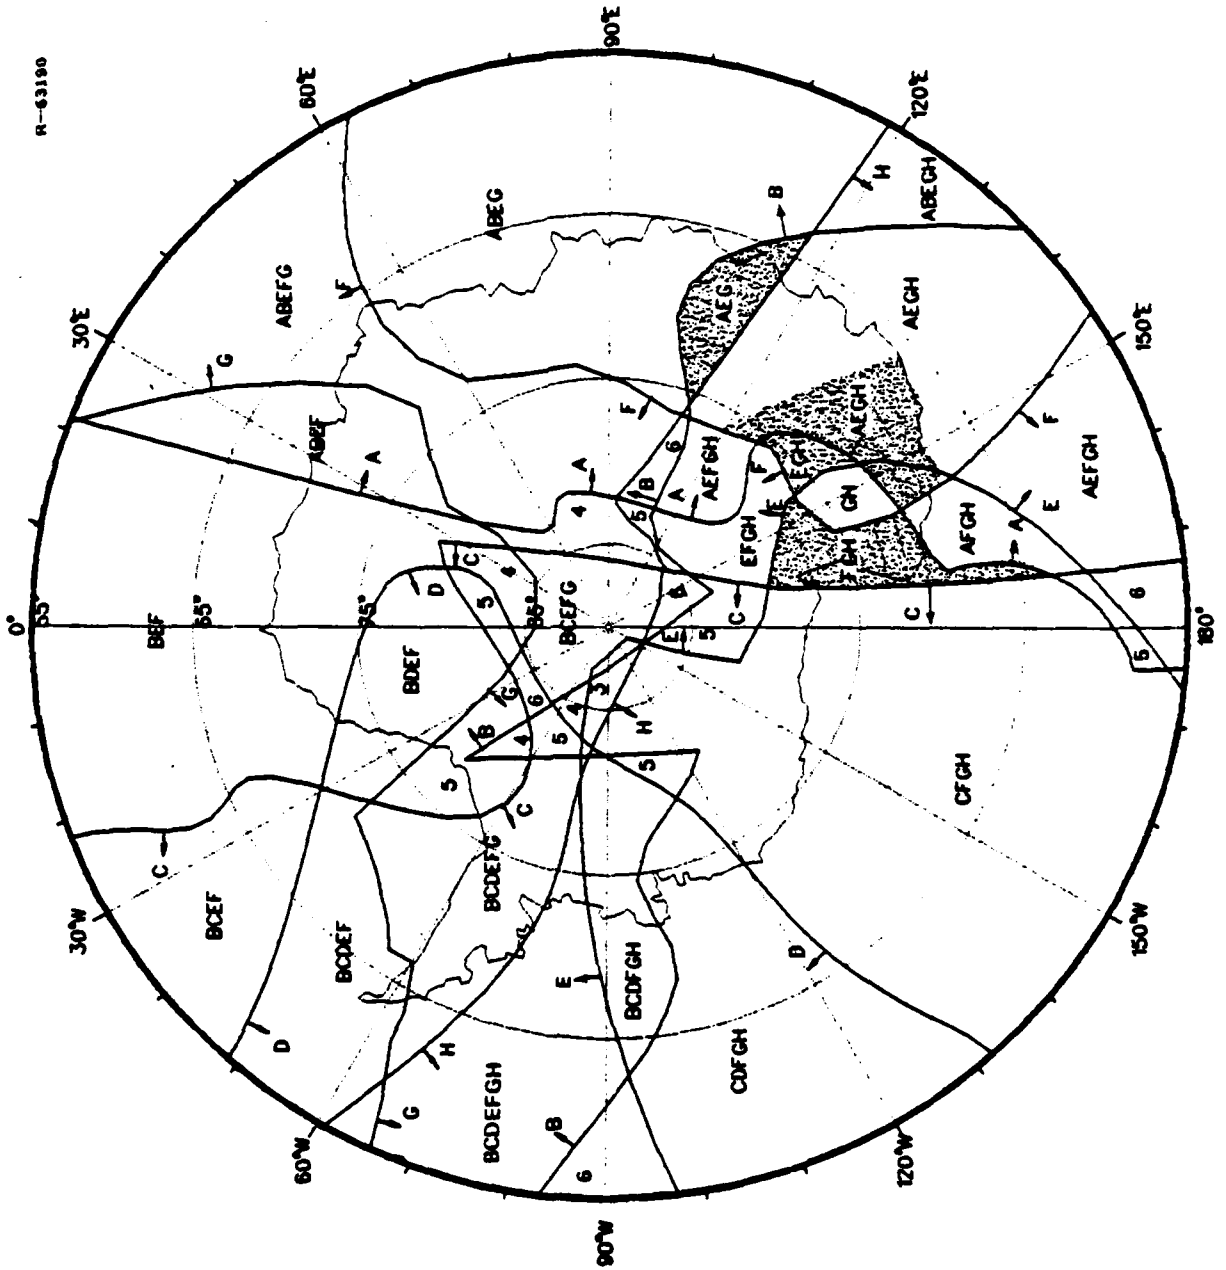

R-43190


AZ EQ DIST
 (S POLE)
 -30 dB SNR
 AUGUST
 1800 GMT

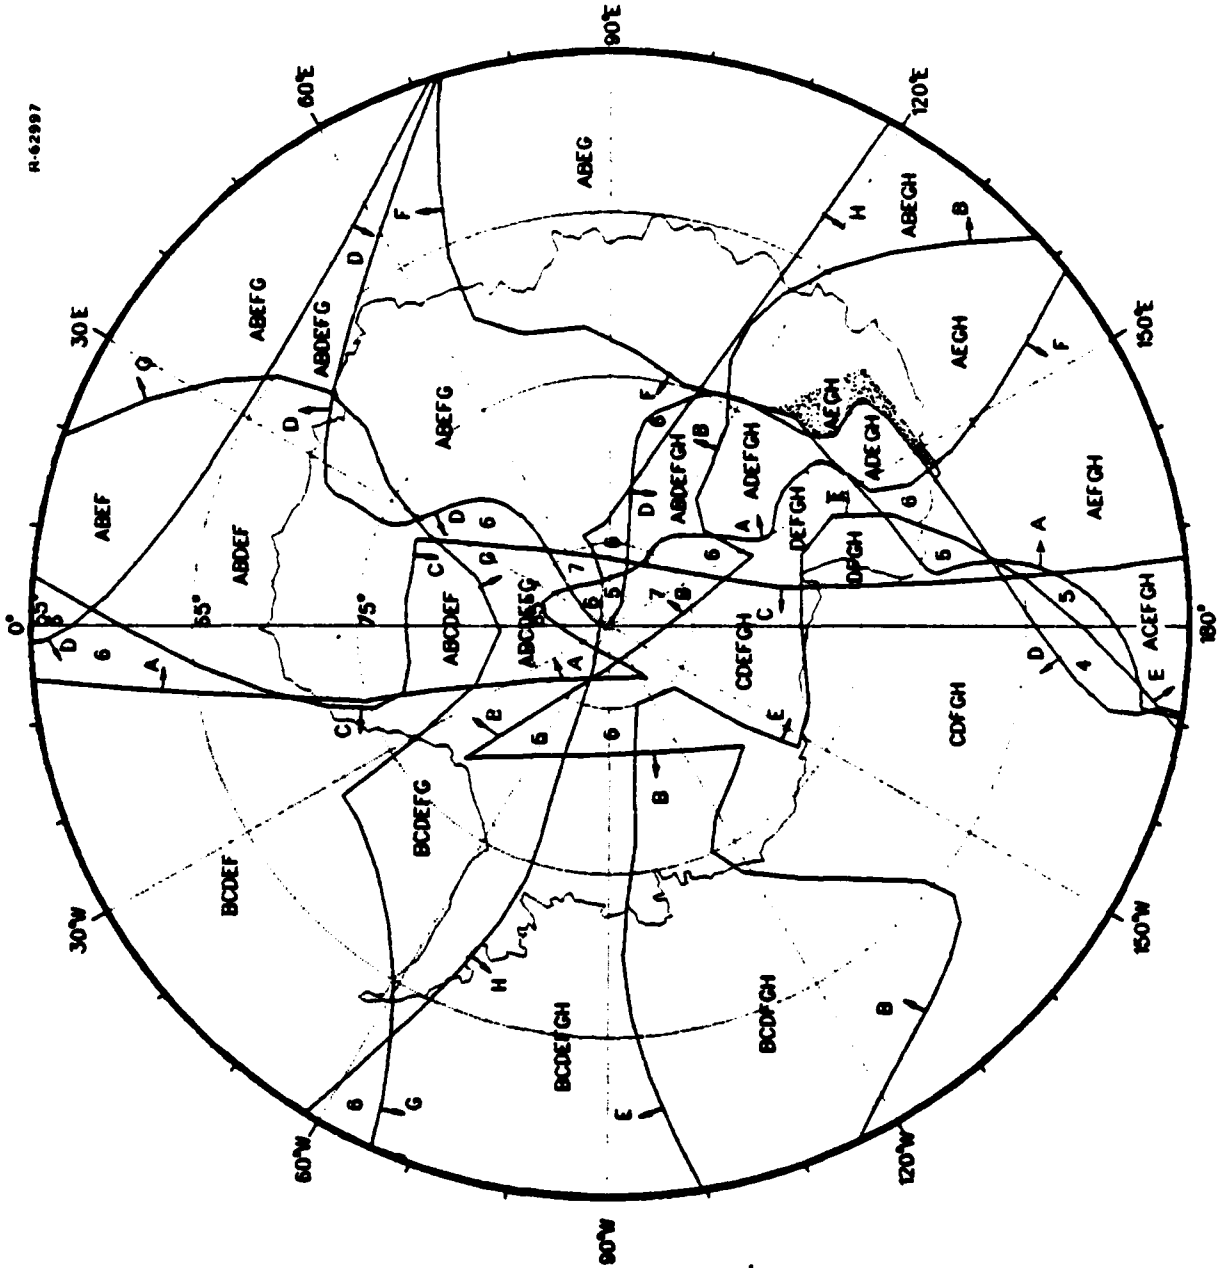


R-62997

R-63346

-20 dB SNR NOVEMBER 0600 GMT

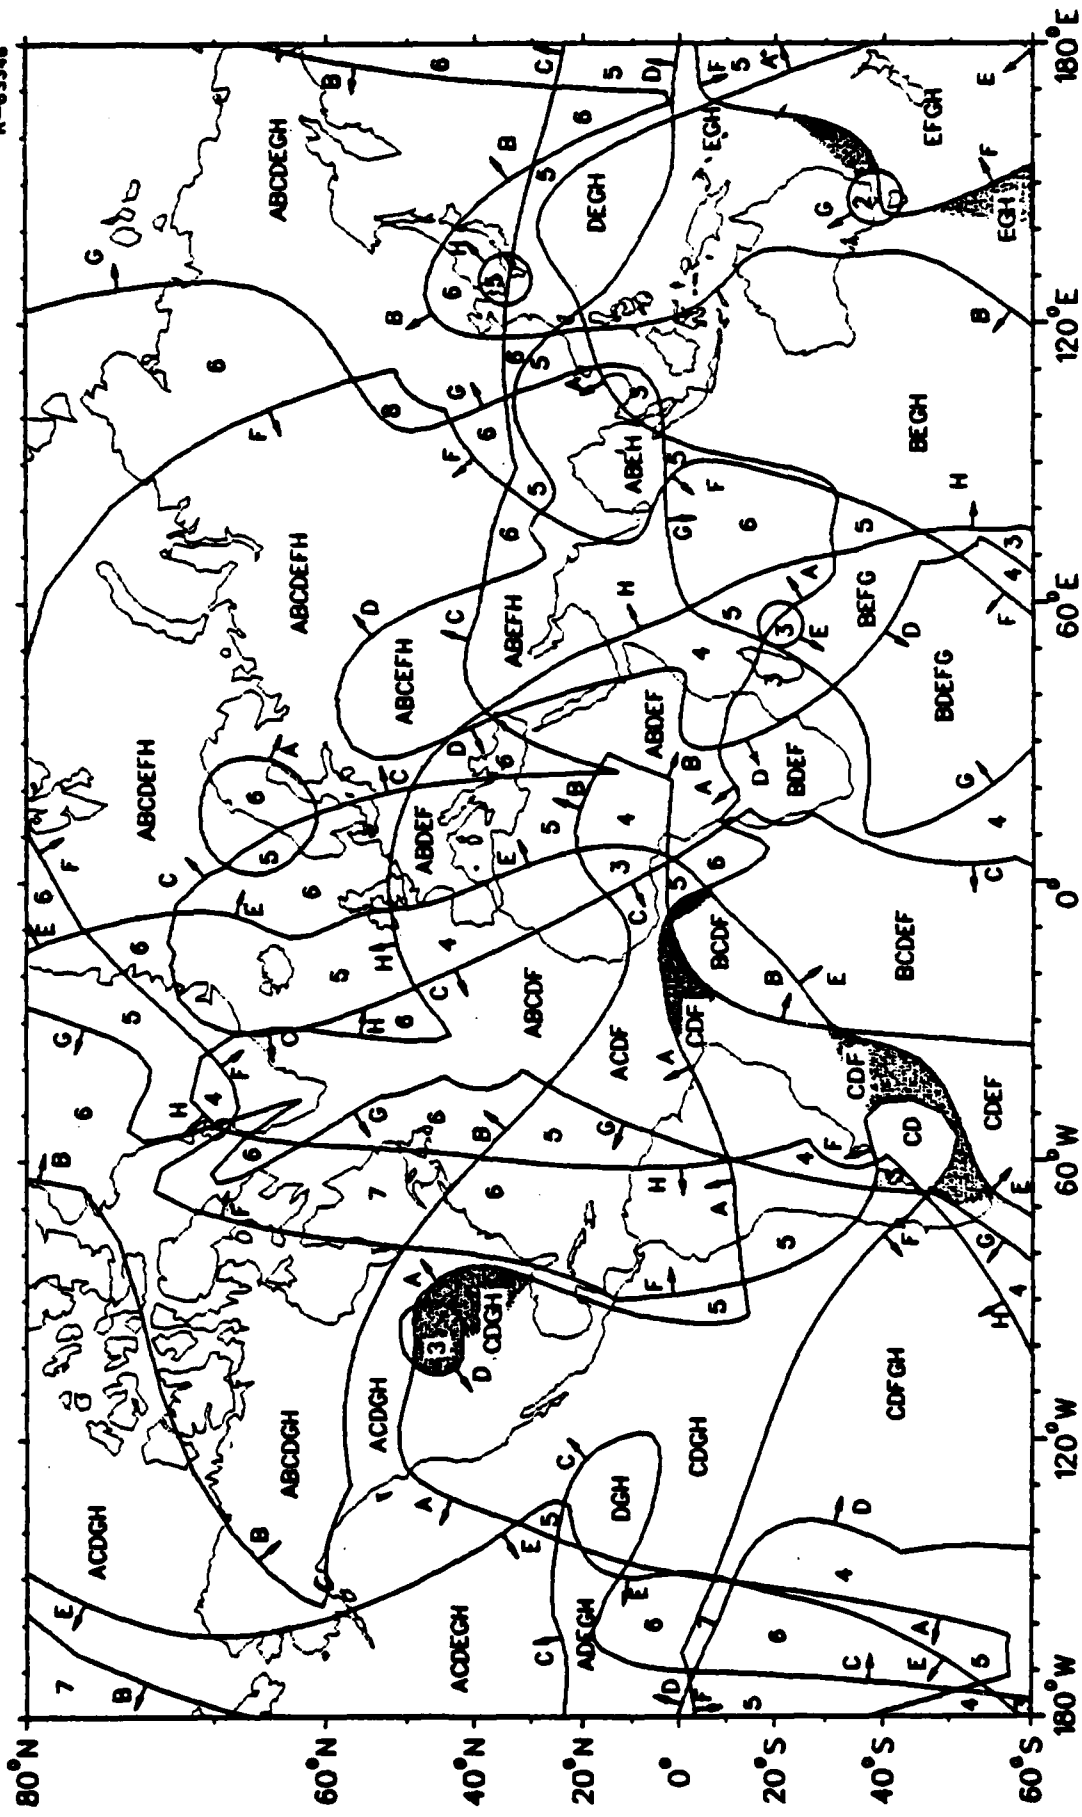

AZ EQ DIST
 (N POLE)
 -20 dB SNR
 NOVEMBER
 0600 GMT

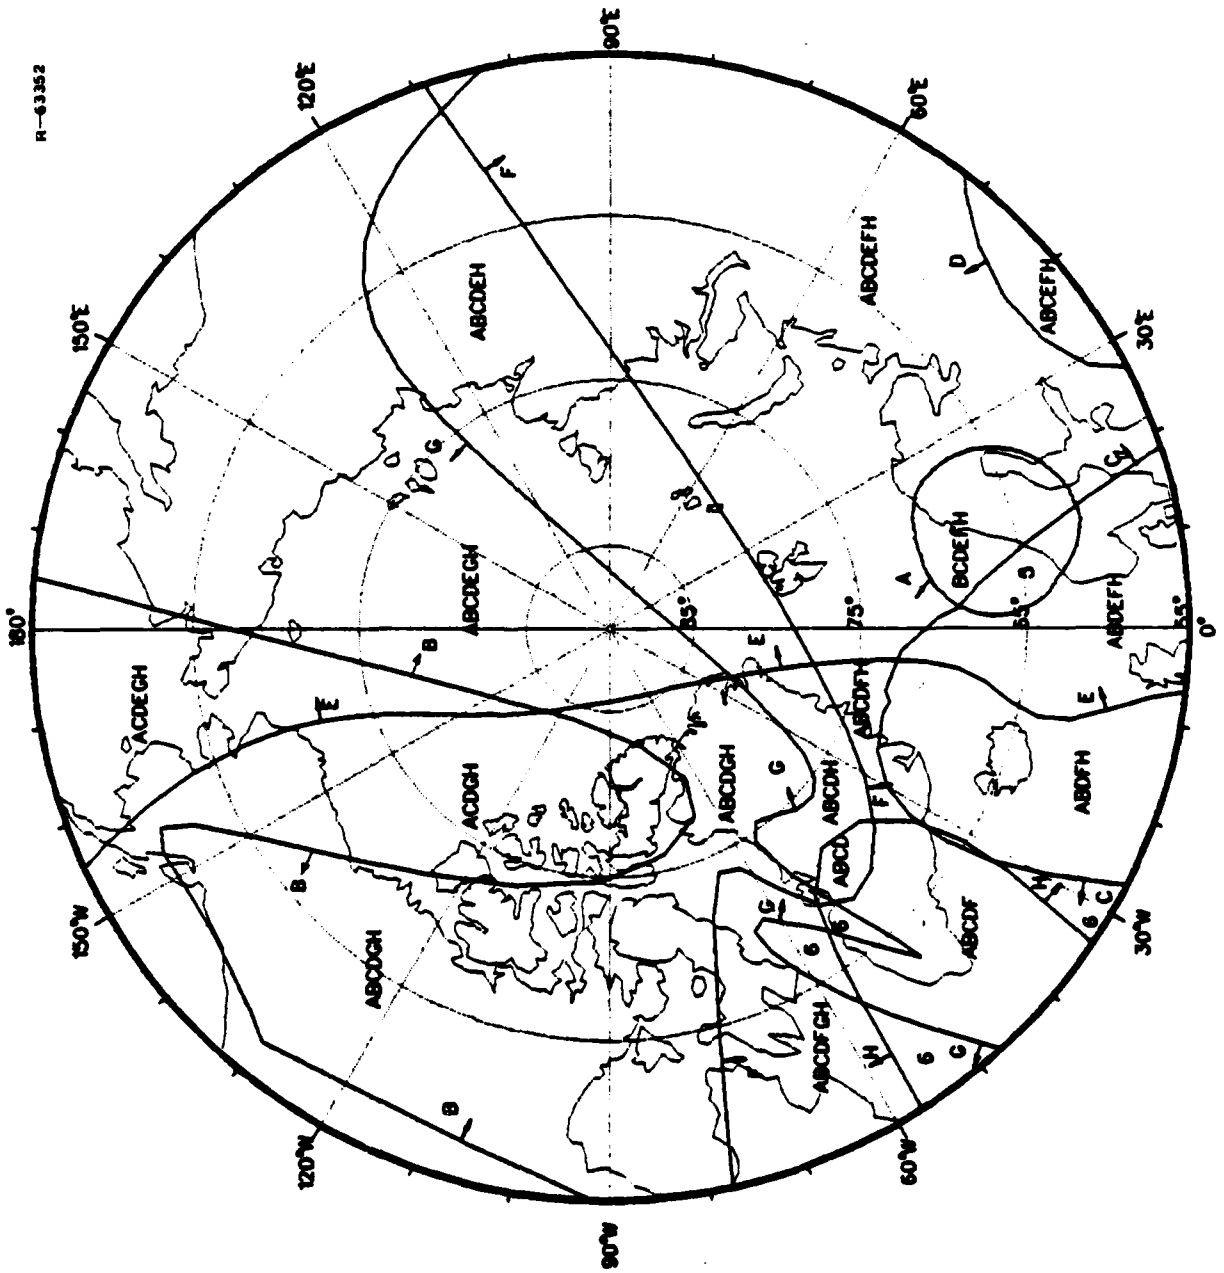


AZ EQ DIST
(S POLE)


-20 dB SNR

NOVEMBER

0600 GMT

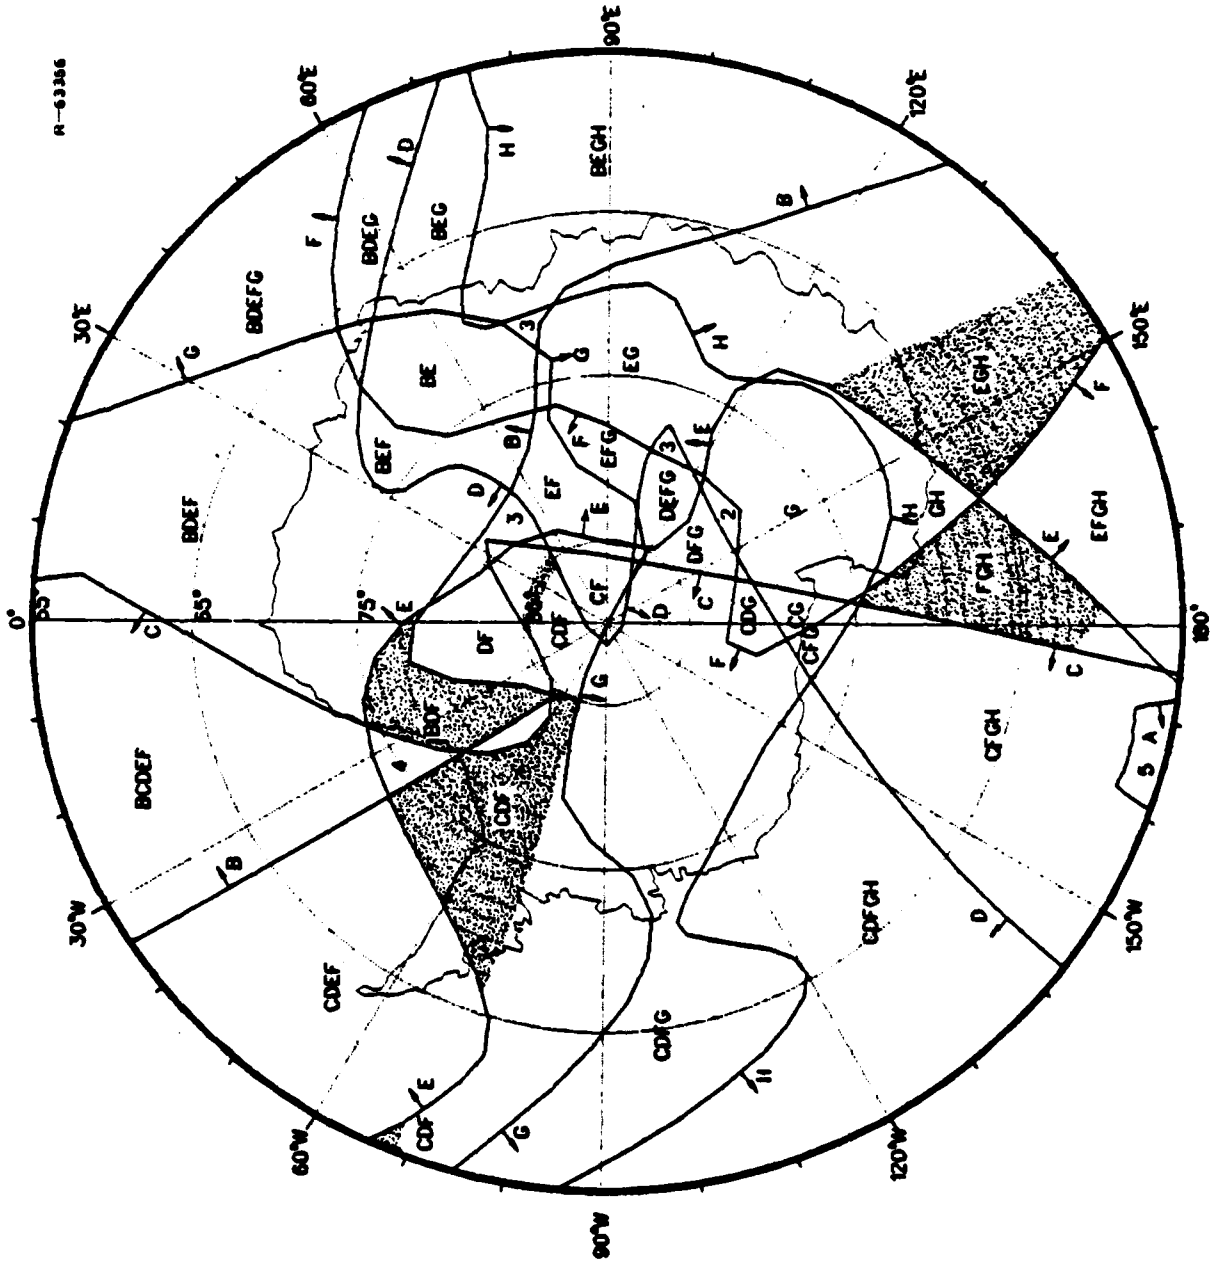

-30 dB SNR NOVEMBER 0600 GMT

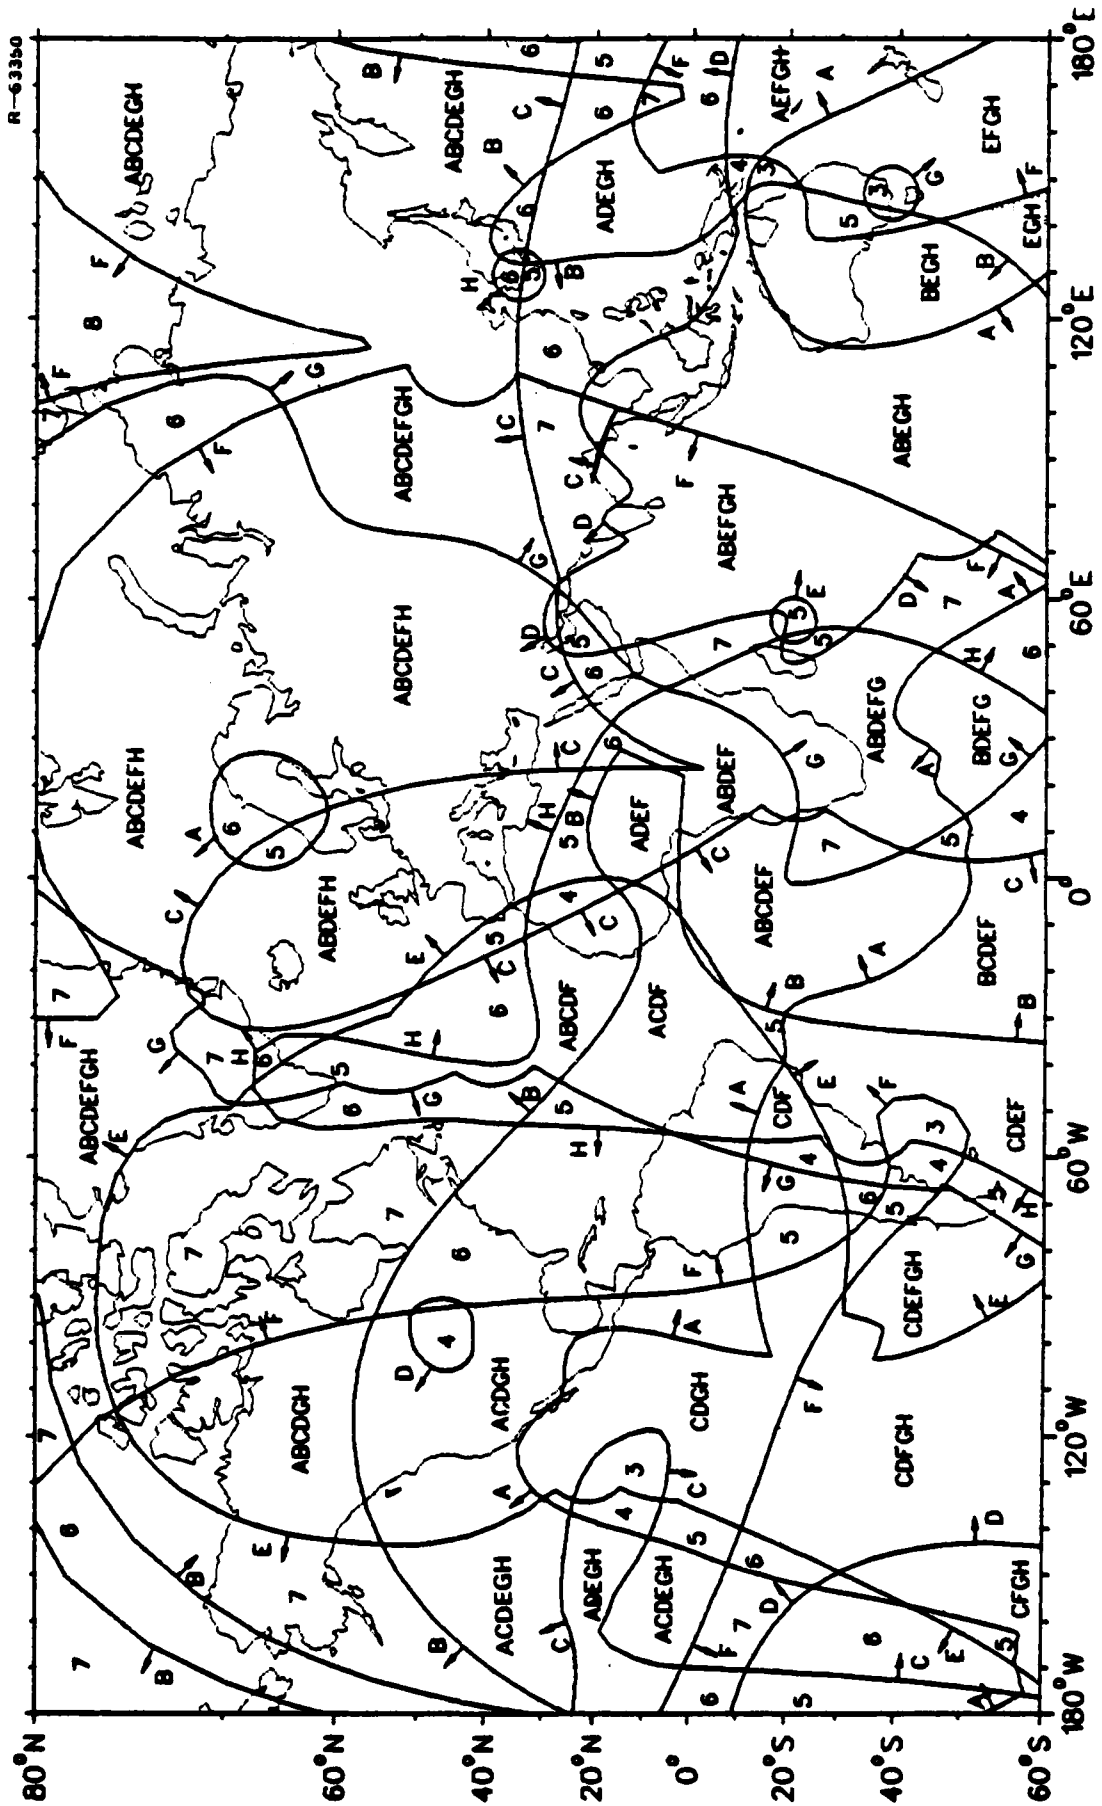


AZ EQ DIST
(N POLE)

-30 dB SNR


NOVEMBER

0600 GMT

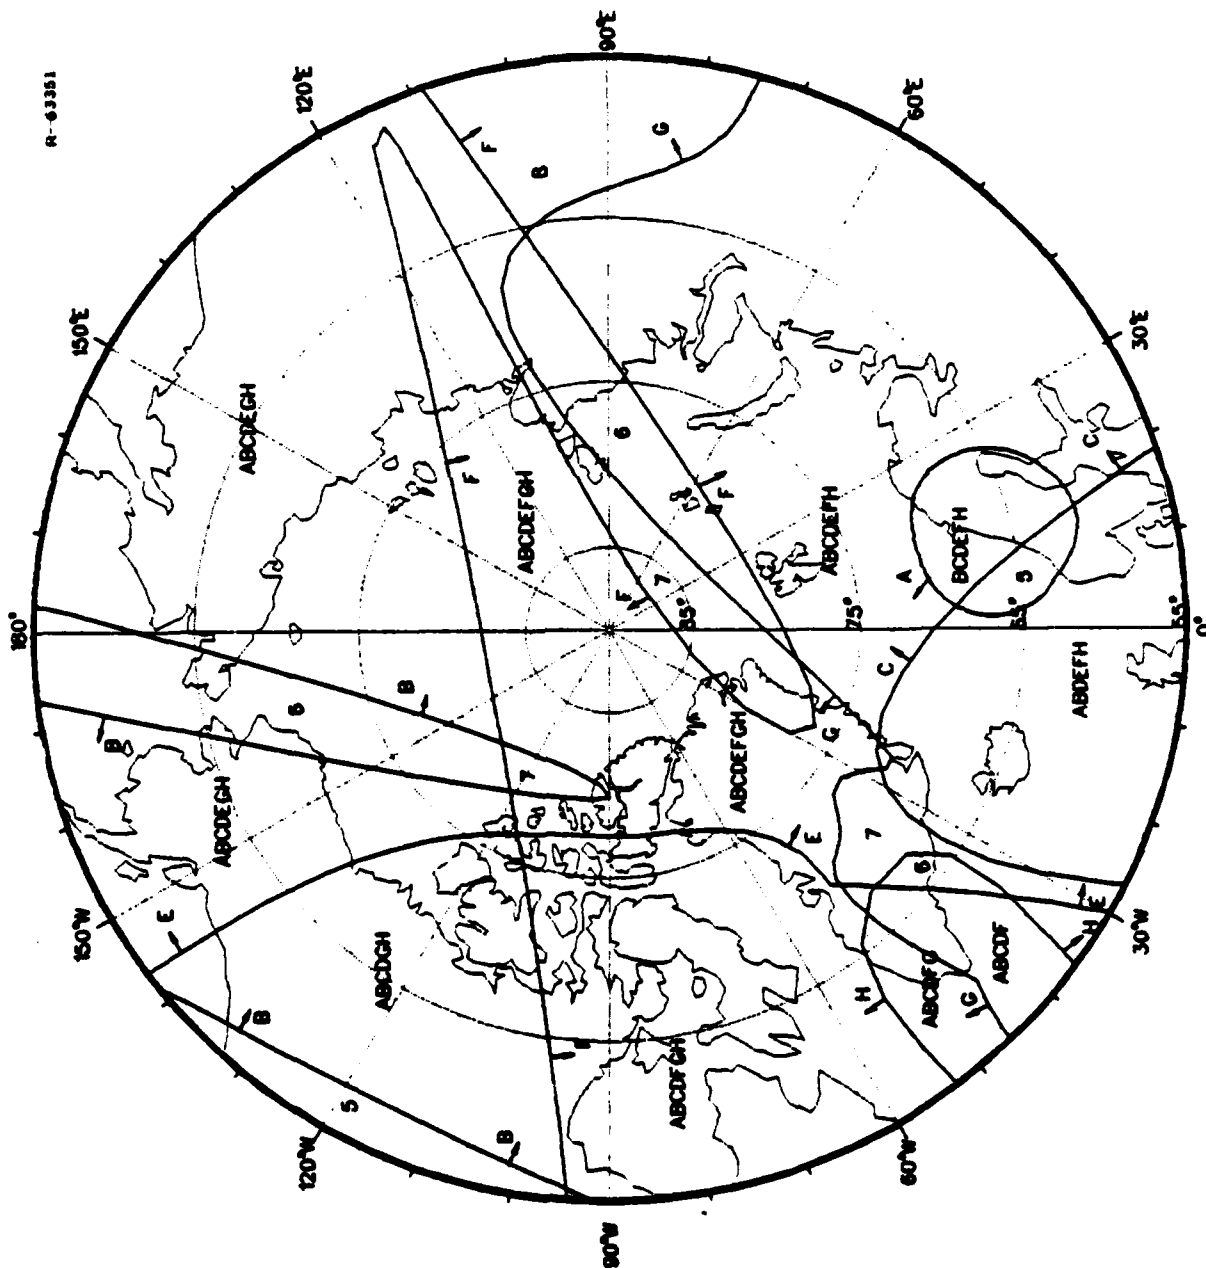


R-63351

AZ EQ DIST
 (S POLE)
 -30 dB SNR
 NOVEMBER
 0600 GMT

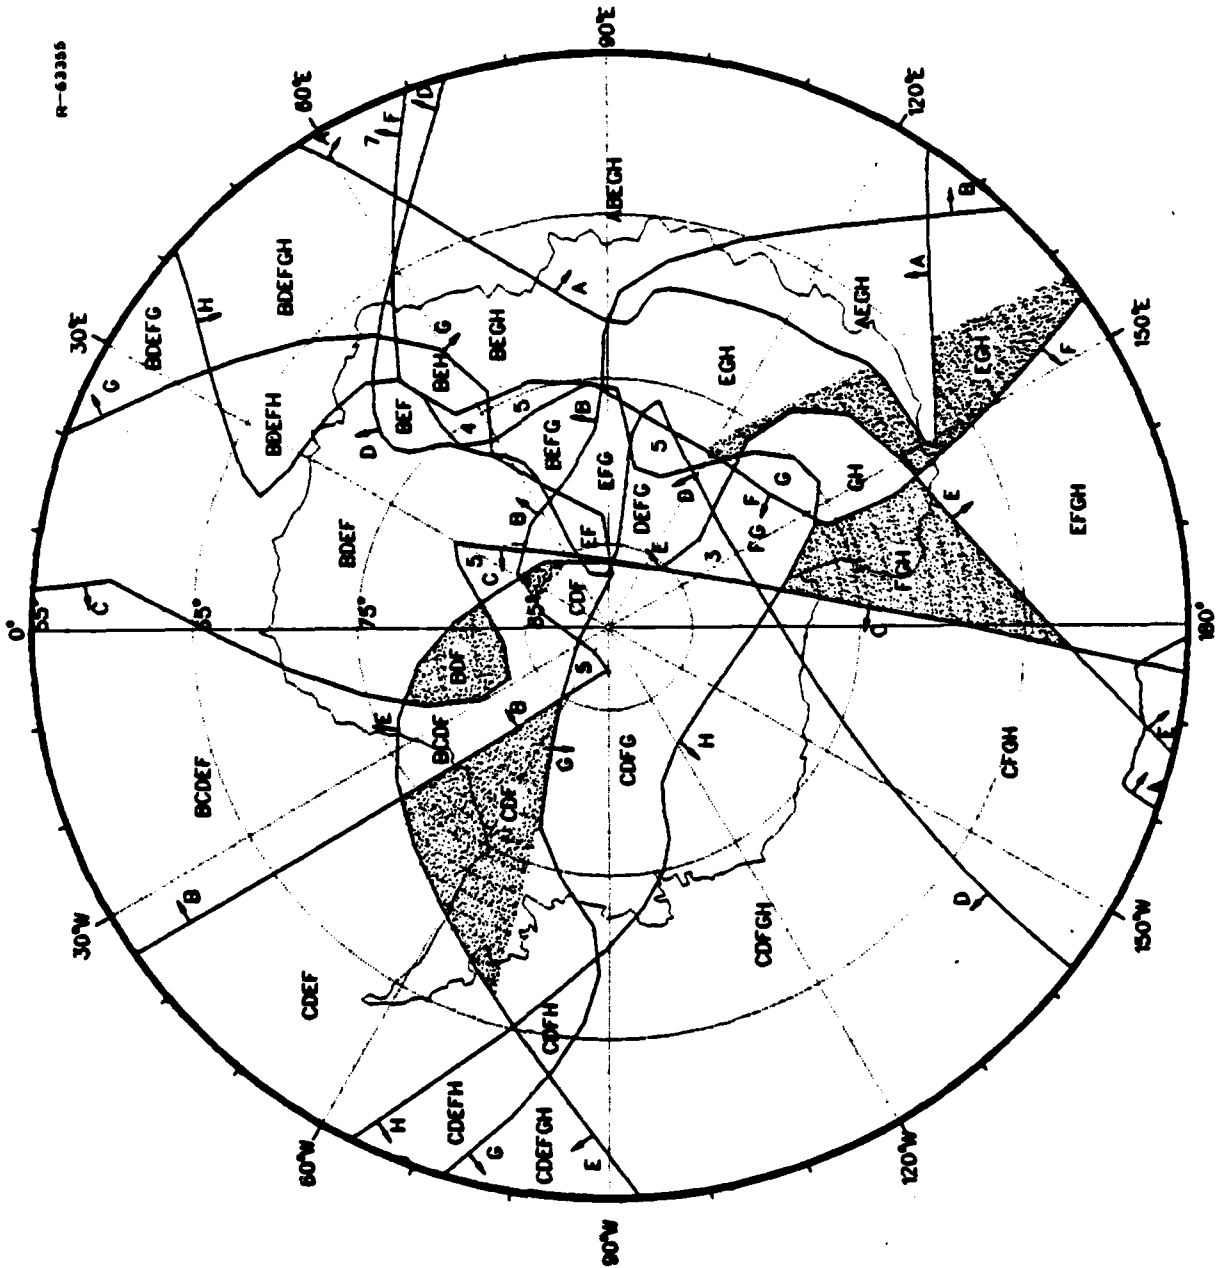


R-63355


-20 dB SNR NOVEMBER 1800 GMT

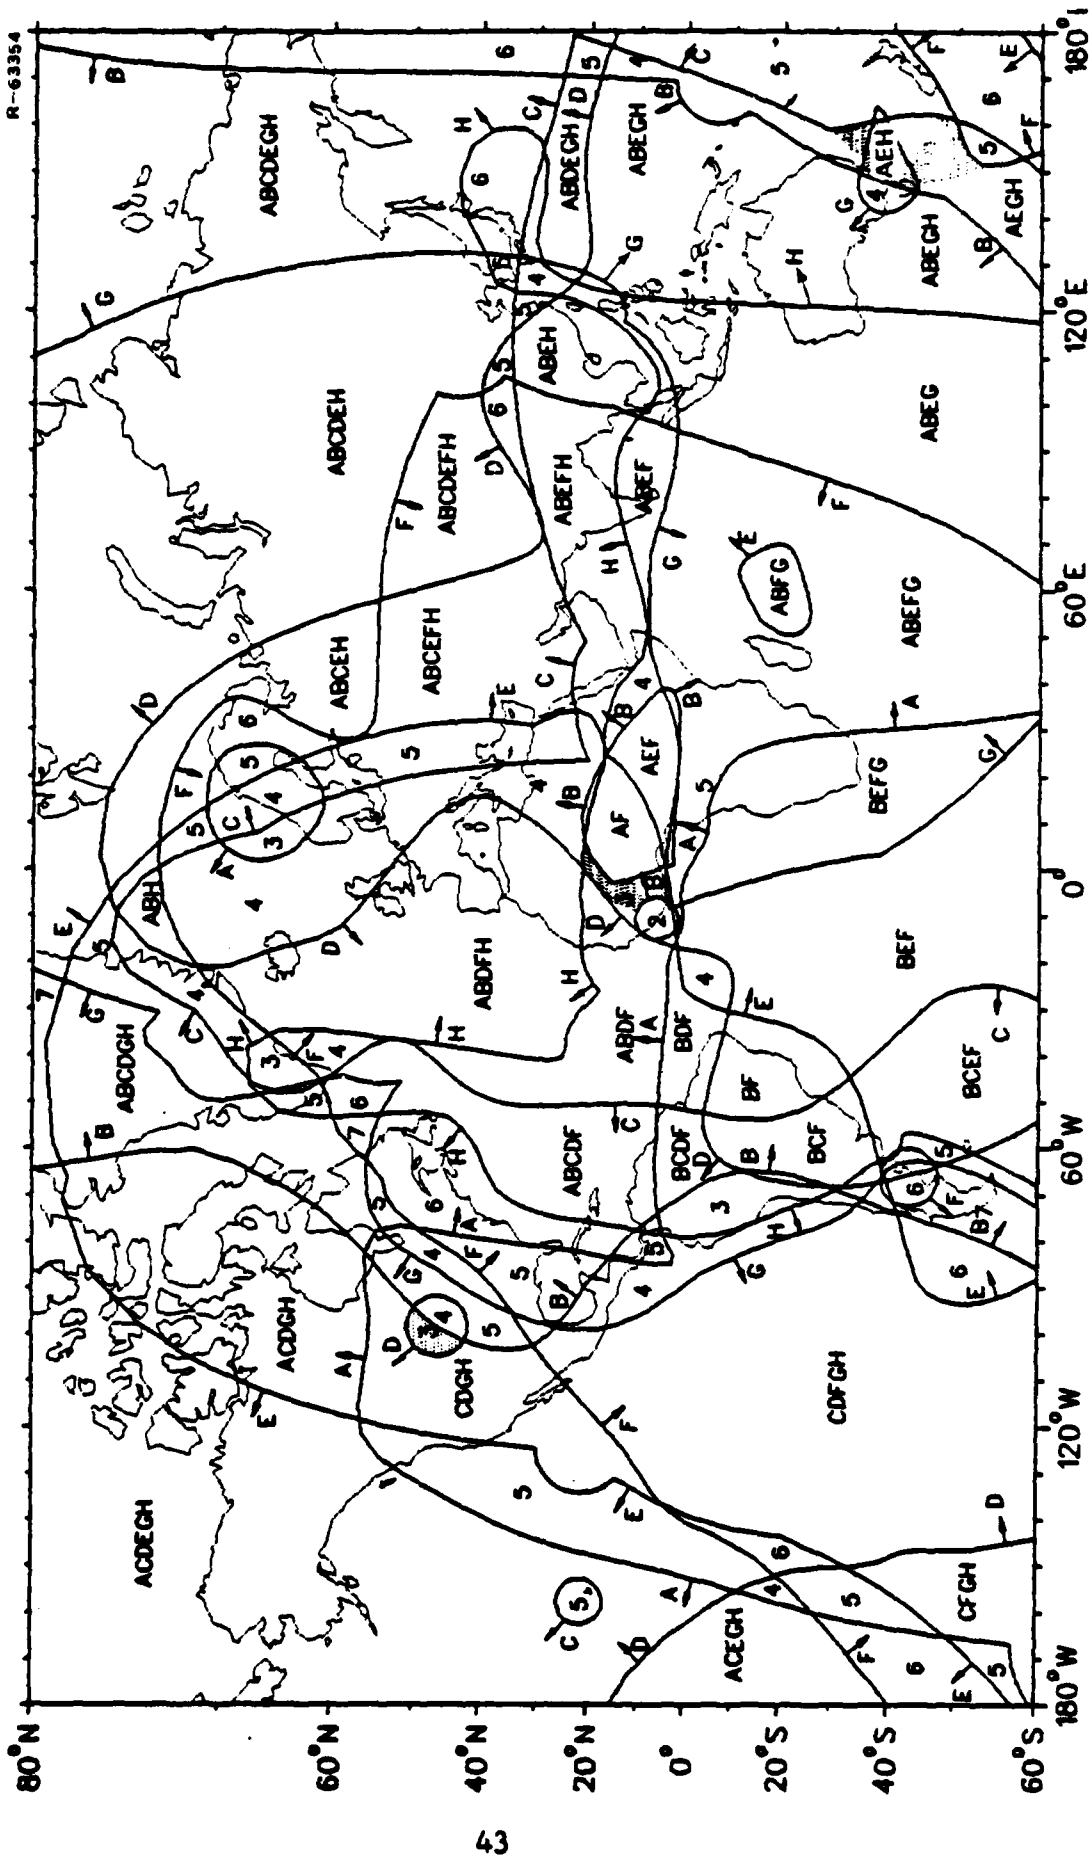

AZ EQ DIST
(N POLE)
-20 dB SNR
NOVEMBER
1800 GMT

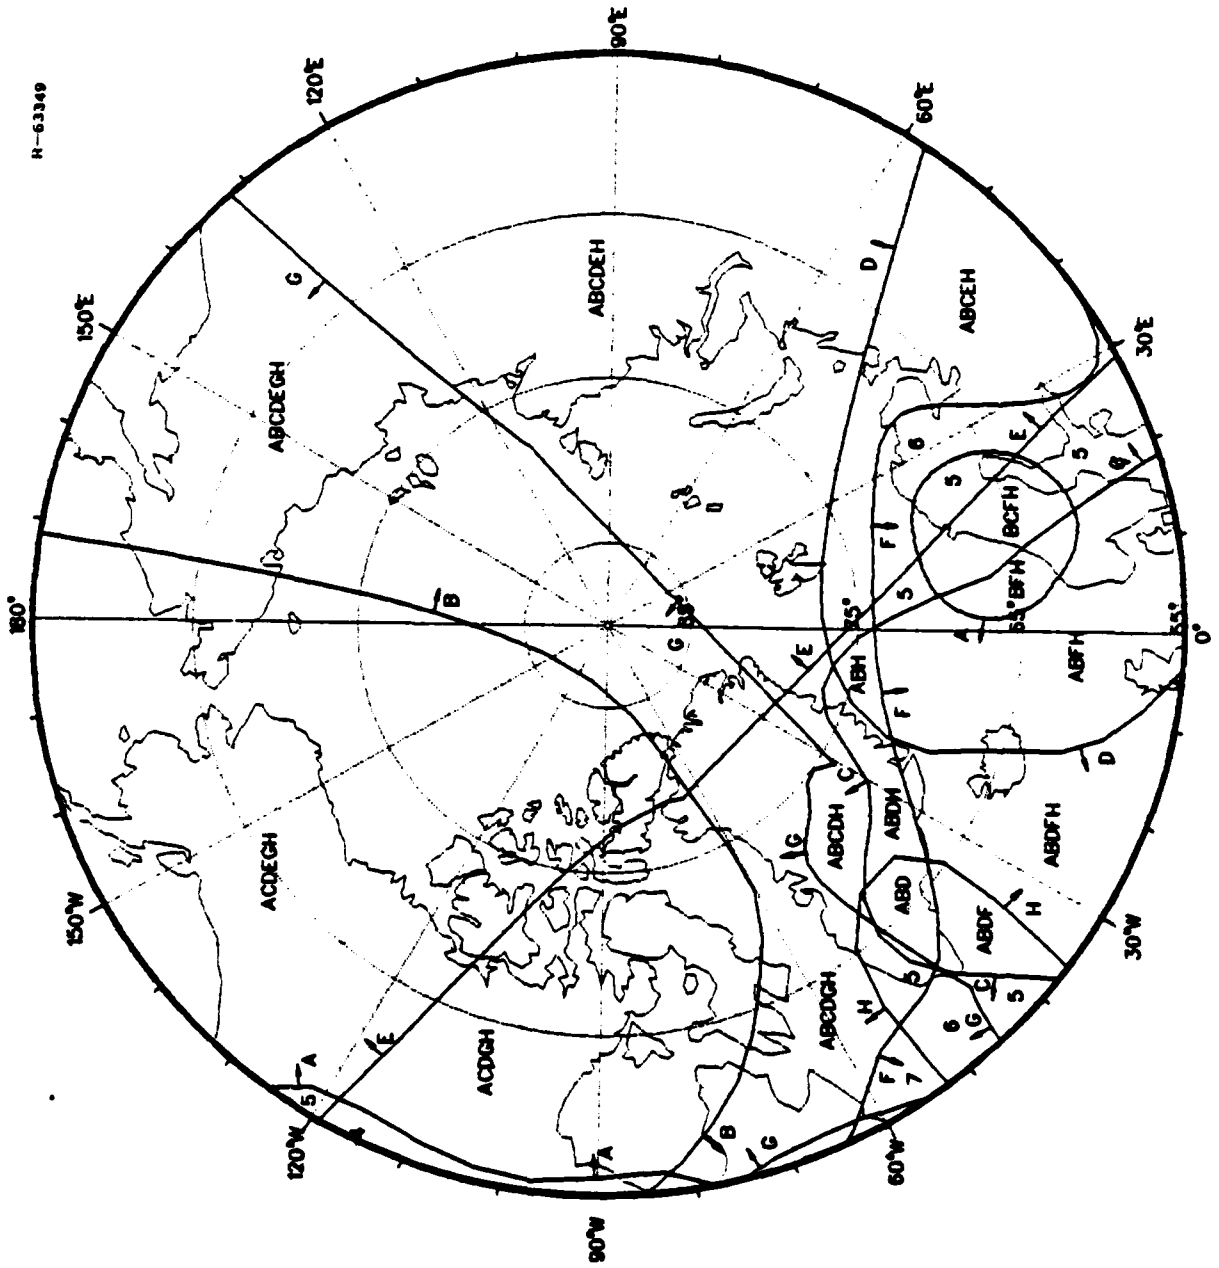


AZ EQ DIST
 (S POLE)
 -20 dB SNR
 NOVEMBER
 1800 GMT

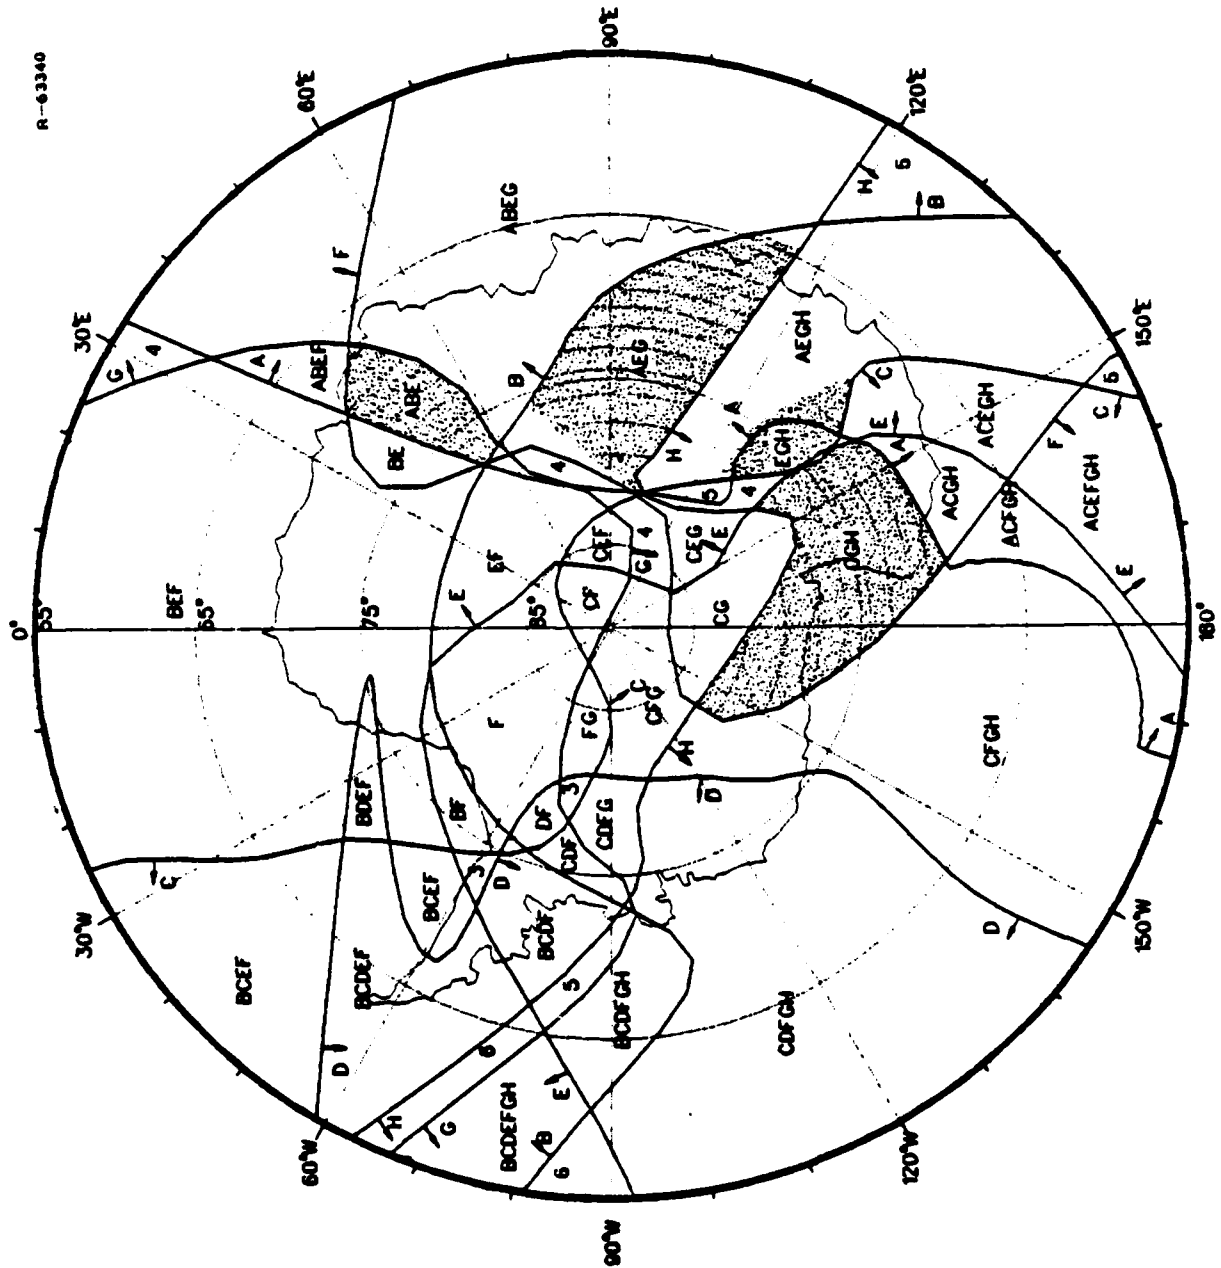


R-43340

-30 dB SNR NOVEMBER 1800 GMT

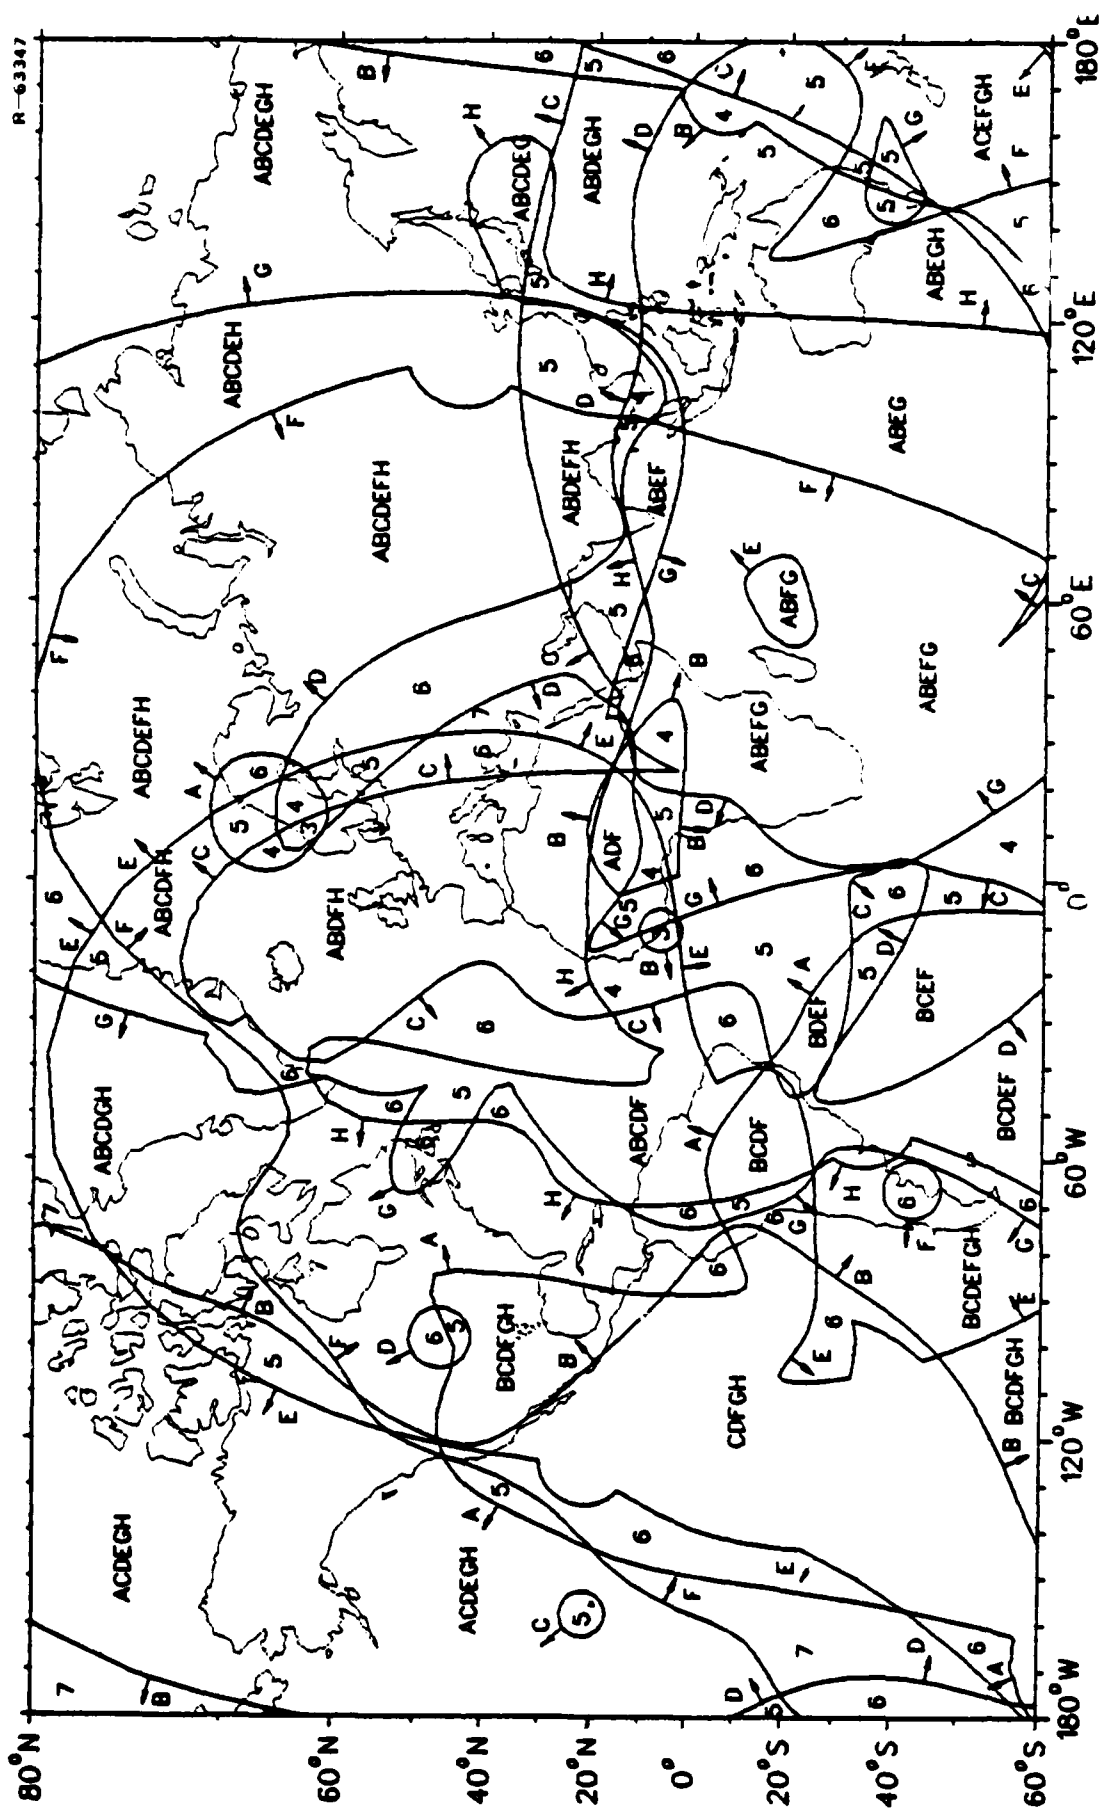


AZ EQ DIST
 (N POLE)
 -30 dB SNR
 NOVEMBER
 1800 GMT

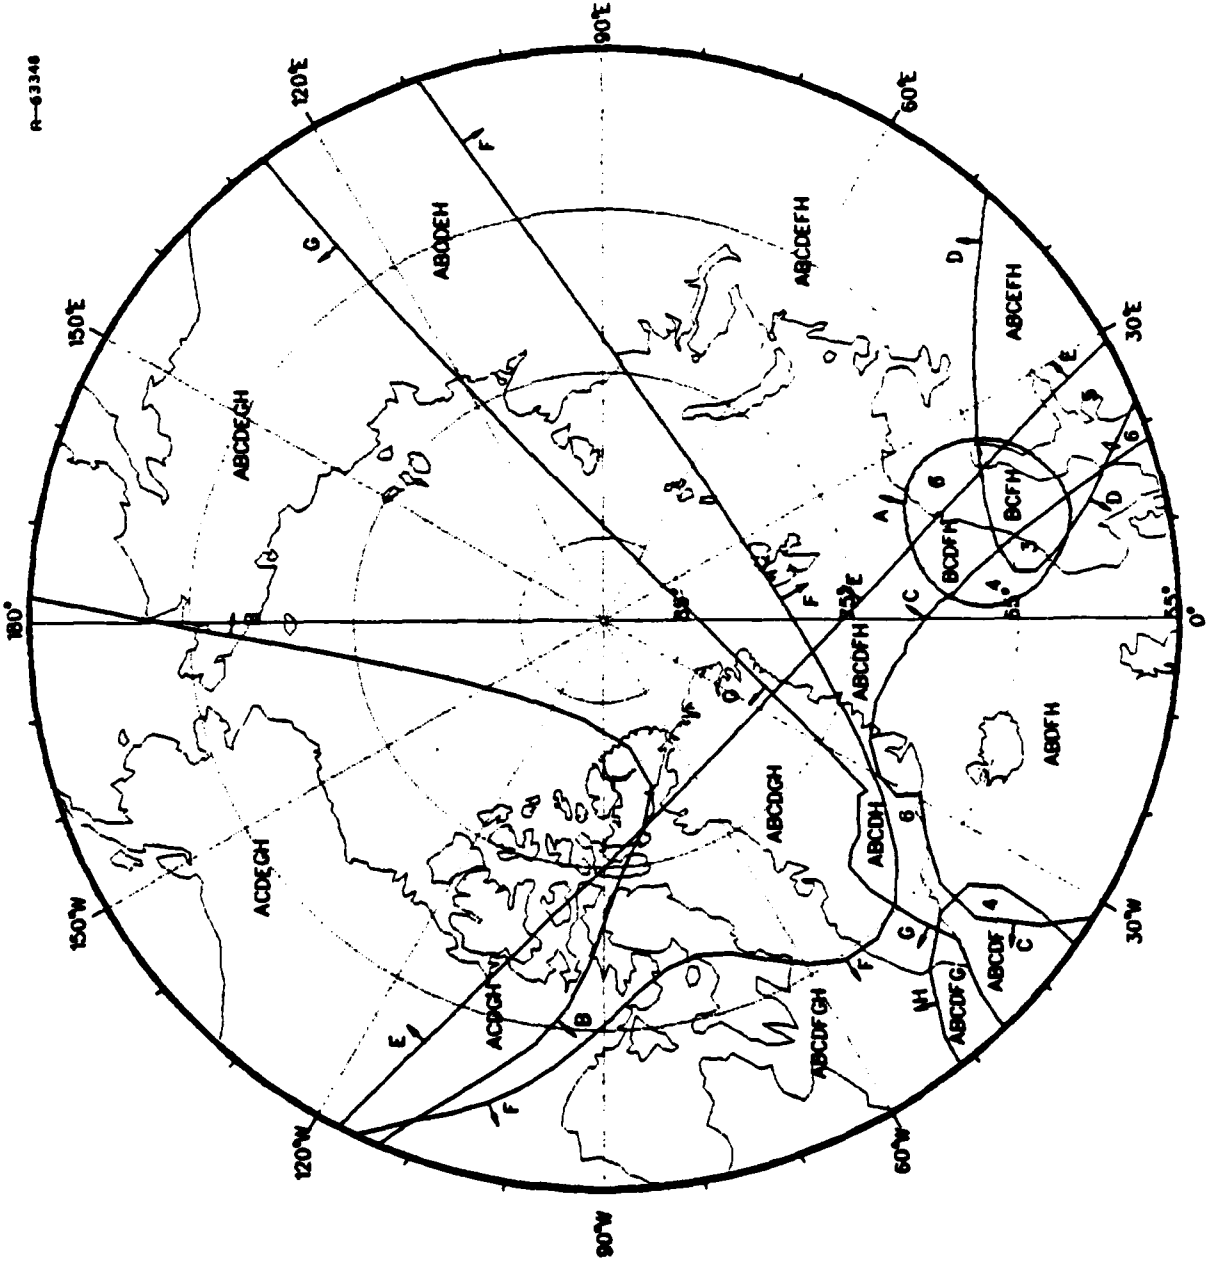

R-63346

AZ EQ DIST
(S POLE)
-30 dB SNR
NOVEMBER
1800 GMT

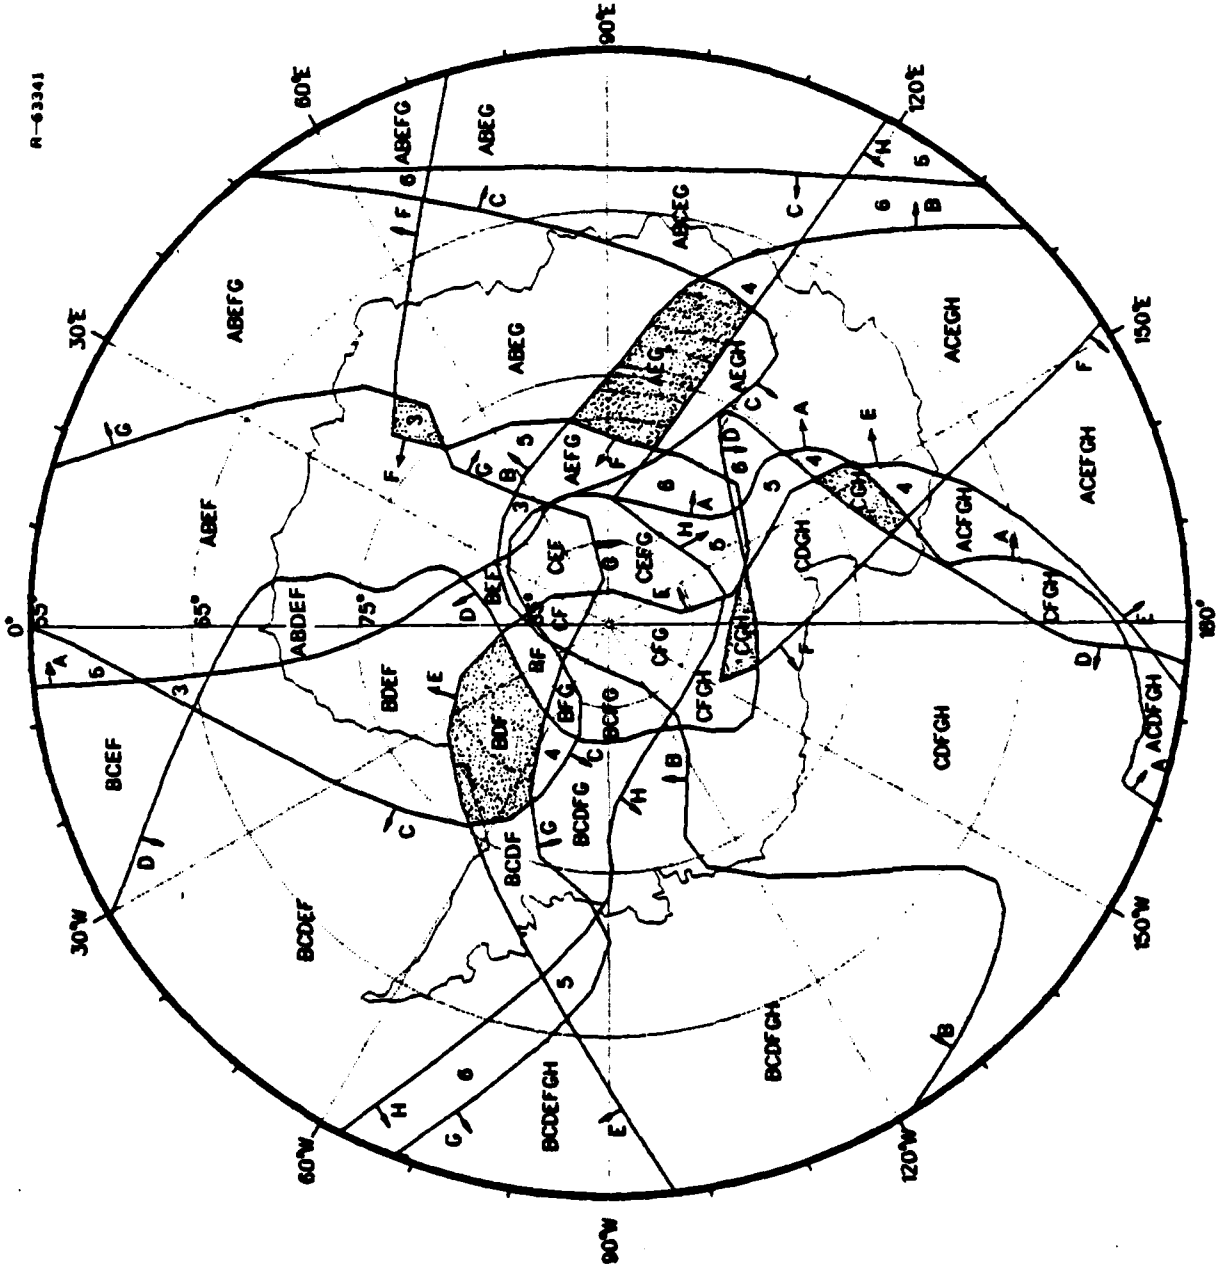

R-63341