

AD-A100 900

DELAWARE UNIV NEWARK APPLIED MATHEMATICS INST
SHOCK DEVELOPMENT PRIOR TO DETONATION IN SHAPED
AUG 80 A JEFFREY

F/6 20/11
LAYERED NONLINE--ETC(U)
F49620-79-C-0150
NL

UNCLASSIFIED

AFOSR-TR-80-1083

1 OF 1
AD A
110000



END
DATE
FILMED
7-81
DTIC

Shock Development Prior to Detonation in Shaped Layered Nonlinear Elastic MediaWith Stochastic Variability

by

Alan Jeffrey

Applied Mathematics Institute
University of Delaware

F49620-79-C-0150

Final

The objective of this work was to examine the way in which an acceleration wave propagates in a randomly layered nonlinear medium in which the material constants vary stochastically from layer to layer. Furthermore the problem, although formulated as a one-dimensional configuration, was modified to describe propagation in a bar in which there is a slowly changing cross-sectional area. Thus the analysis may be applied to formed charges which have an axis of symmetry and a slowly varying cross-section normal to that axis.

Propagation was assumed to be normal to the layering and along the axis of symmetry, while both the material constants and the layer thicknesses were regarded as stochastic variables. The time and place of shock wave formation was found and, for the purposes of this analysis, were taken to be synonymous with the time and place of the initiation of detonation.


Apart from the complication in the expressions for the transmission and reflection coefficients at each interface and in the transport equations, the main effect of the area variation was found to be the introduction of an oscillatory rather than a monotone behaviour for the propagating acceleration wave in each layer. In the one-dimensional approximation that was used, this corresponds to diffraction effects introduced by the variable cross-sectional area. It is possible that under some circumstances this oscillation might precipitate shock formation relative to the constant cross-sectional area case, and hence precipitate detonation.

As already mentioned, the stochastic variability of the medium is taken to be introduced via the mechanism of an arbitrary layering in which both layer thickness and material constants are assumed to be sampled from given, but otherwise arbitrary, distributions. For this reason the layer thicknesses were assumed to be small, though this assumption introduced no approximation in the wave transport analysis.

Approved for public release;
distribution unlimited.

To find the statistical distribution of the position of shock formation that results, or a confidence interval for the acceleration wave intensity, numerical methods would be necessary, based on the analytical results just outlined. The

DTIC FILE COPY AD A100000

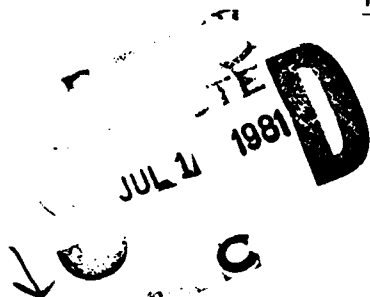

preliminary analysis for this work was described in (1) and the rest in (2).

In the future this work will be continued in a slightly different way by examining the effect of a reaction rate equation in which the rate constant is a stochastic variable, and in which there may also be a source term present that could be either determinate or stochastic. In its simplest form this would involve finding the moments and correlation functions for the equation

$$\frac{dy}{dt} = -K(t)y + L(t) \quad \text{with } y(0) = 1,$$

where $K(t)$ is a random function defined to be

$$K(t) = K_1 \quad \text{with probability } p > 0$$

and

$$K(t) = K_2 \quad \text{with probability } q > 0,$$

with $K_1 \neq K_2$, $p + q = 1$ and $L(t)$ some source function. Only the case $p = q = \frac{1}{2}$ is to be found in the literature, though there it is mainly second order equations that are involved. The subsequent generalisation would then be to consider a function

$$K(t) = K_i \quad \text{with probability } p_i > 0 \text{ for } i = 1, 2, \dots, n,$$


where

$$p_1 + p_2 + \dots + p_n = 1 \text{ and the } K_i \text{ all different.}$$

References

1. A. Jeffrey, Stochastic variability in the initiation of detonation, Applied Mathematics Institute, University of Delaware Report #59A1978.
2. A. Jeffrey and R.P. Gilbert, Shock development prior to detonation in a shaped layered nonlinear elastic medium with stochastic variability, Applied Mathematics Institute, University of Delaware Report #67A, 1979.

AIR FORCE OFFICE OF SCIENTIFIC RESEARCH (AFSC)
NOTICE OF TRANSMITTAL TO DDC
This technical report has been reviewed and is
approved for public release IAW AFR 190-12 (7b).
Distribution is unlimited.
A. D. BLOSE
Technical Information Officer

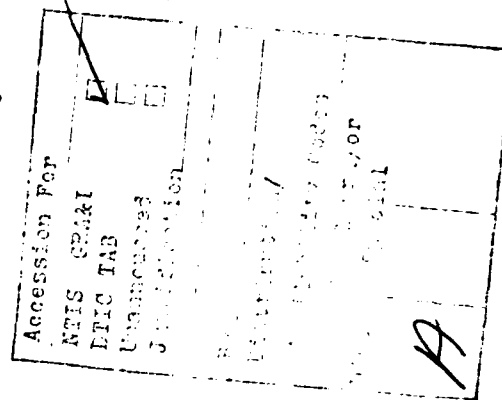

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

19 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER AFOSR-TR-80-1088	2. GOVT ACCESSION NO. AD-A100 900	3. RECIPIENT'S CATALOG NUMBER 4	
4. TITLE (and Subtitle) SHOCK DEVELOPMENT PRIOR TO DETONATION IN SHAPED LAYERED NONLINEAR ELASTIC MEDIA WITH STOCHASTIC VARIABILITY		5. TYPE OF REPORT & PERIOD COVERED FINAL rept.	
7. AUTHOR(s) PROF. ALAN /JEFFREY		8. CONTRACT OR GRANT NUMBER(s) F49620-79-C-0150	
9. PERFORMING ORGANIZATION NAME AND ADDRESS UNIVERSITY OF DELAWARE APPLIED MATHEMATICS INSTITUTE NEWARK, DE 19711		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61102F16/2304/A4	
11. CONTROLLING OFFICE NAME AND ADDRESS AIR FORCE OFFICE OF SCIENTIFIC RESEARCH BOLLING, AFB, DC 20332		12. REPORT DATE 17 AUG 1980	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 12 31		13. NUMBER OF PAGES 2	
		15. SECURITY CLASS. (of this report) UNCLASSIFIED	
		15a. DECLASSIFICATION DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)			

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

411270

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

81 6 29 264

DATE
FILMED
-8