

AD A102575

REPORT NO. NADC-81165-60



TWIN-ROTOR PATROL AIRSHIP FLYING MODEL DESIGN RATIONALE

John A. Eney
Aircraft and Crew Systems Technology Directorate
NAVAL AIR DEVELOPMENT CENTER
Warminster, Pennsylvania 18974

1 JUNE 1981

PHASE REPORT
AIRTASK NO. F41-411-000
Work Unit DH814

AUG 7 1981

A

Approved for Public Release; Distribution Unlimited

Prepared for
NAVAL AIR SYSTEMS COMMAND
Department of the Navy
Washington, D. C. 20361

DTIC FILE COPY

NOTICES


REPORT NUMBERING SYSTEM - The numbering of technical project reports issued by the Naval Air Development Center is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Command Office or the Functional Directorate responsible for the report. For example: Report No. NADC-78015-20 indicates the fifteenth Center report for the year 1978, and prepared by the Systems Directorate. The numerical codes are as follows:

CODE	OFFICE OR DIRECTORATE
00	Commander, Naval Air Development Center
01	Technical Director, Naval Air Development Center
02	Comptroller
10	Directorate Command Projects
20	Systems Directorate
30	Sensors & Avionics Technology Directorate
40	Communication & Navigation Technology Directorate
50	Software Computer Directorate
60	Aircraft & Crew Systems Technology Directorate
70	Planning Assessment Resources
80	Engineering Support Group


PRODUCT ENDORSEMENT - The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

CAUTION - NATIONAL SECURITY INFORMATION. UNAUTHORIZED DISCLOSURE SUBJECT TO CRIMINAL SANCTIONS.

APPROVED BY:


J. R. WOODS
CDR USN

DATE:



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 14) NADC-81165-60	2. GOVT ACCESSION NO. AD-A204	3. RECIPIENT'S CATALOG NUMBER 575
4. TITLE (and Subtitle) 6) Twin-Rotor Patrol Airship Flying Model Design Rationale,	5. TYPE OF REPORT & PERIOD COVERED 9) Phase Report.	
7. AUTHOR(s) 10) John A. Eney	6. PERFORMING ORG. REPORT NUMBER	
8. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Air Development Center Aircraft & Crew Systems Technology Directorate Warminster, Pennsylvania 18974	9. CONTRACT OR GRANT NUMBER(s) 16) F41-411-000, DH814	
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command Department of the Navy Washington, DC 20361	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 17) 62241N, F41-411-000, DH814	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	12. REPORT DATE 11) 1 June 1981	
	13. NUMBER OF PAGES (13) 14	
	15. SECURITY CLASS. (of this report) Unclassified	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release; Distribution Unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Lighter-Than-Air Airships Maritime Patrol		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) To gain experimental data on the controllability of tilt-rotor airships operating near neutral buoyancy, a 32-foot long 1/10 scale flying model is being developed using two contrarotating tilt-rotor representing those on the NASA/Bell XV-15 research aircraft. It is planned to demonstrate controlled hover and transition in an engine-out condition with one rotor stopped to emphasize the natural attitude stability and damping of such vehicles.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601


UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

393532

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

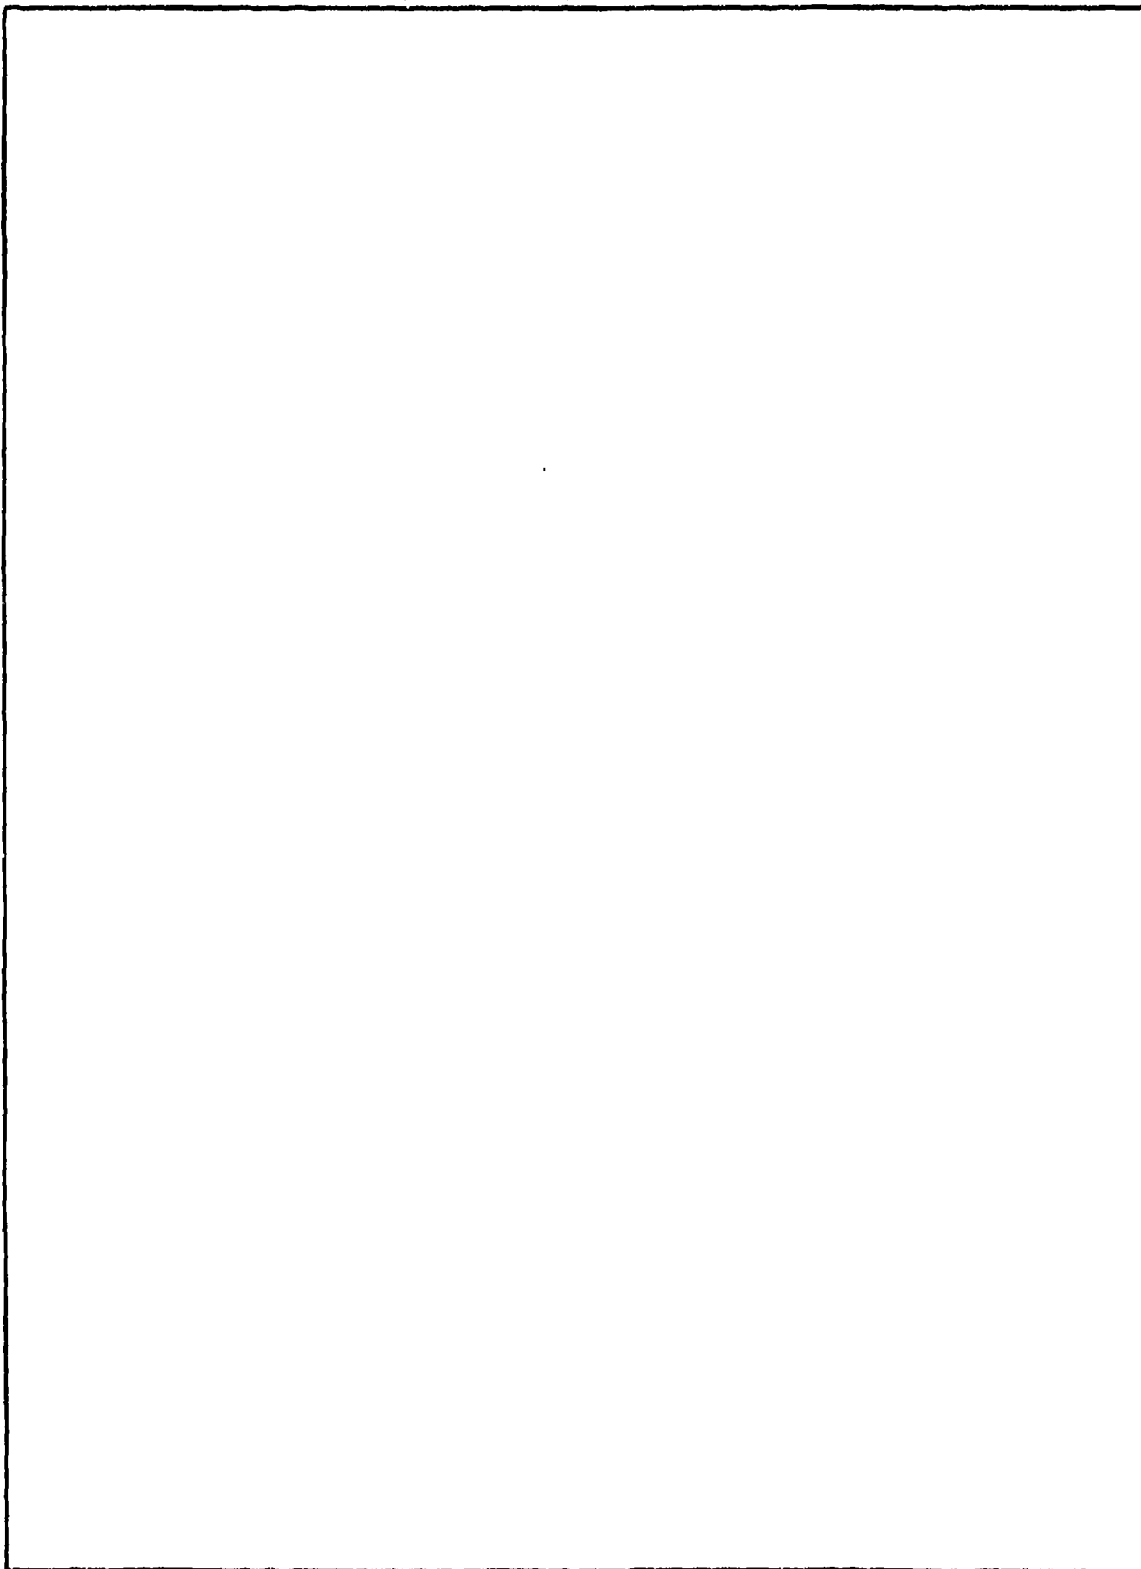

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
ABSTRACT	1
INTRODUCTION	2
BACKGROUND	2
PROPOSED CONCEPTUAL DESIGNS.	2
TWIN ROTOR DESIGN PHILOSOPHY	3
MODEL FEATURES	3
MOORING SYSTEM	4
FLIGHT CONTROL SYSTEM.	4
FABRICATION STATUS	5
Rotor System.	5
Hull (Bag).	5
TEST PLAN.	5

ABSTRACT

To gain experimental data on the controllability of tilt-rotor airships operating near neutral buoyancy, a 32-foot long 1/10 scale flying model is being developed using two contrarotating tilt-rotors representing those on the NASA/Bell XV-15 research aircraft. It is planned to demonstrate controlled hover and transition in an engine - out condition with one rotor stopped to emphasize the natural attitude stability and damping of such vehicles.

Application for

1941

1942

1943

1944

1945

1946

1947

1948

1949

1950

1951

1952

1953

1954

1955

1956

1957

1958

1959

1960

1961

1962

1963

1964

1965

1966

1967

1968

1969

1970

1971

1972

1973

1974

1975

1976

1977

1978

1979

1980

1981

1982

1983

1984

1985

1986

1987

1988

1989

1990

1991

1992

1993

1994

1995

1996

1997

1998

1999

2000

2001

2002

2003

2004

2005

2006

2007

2008

2009

2010

2011

2012

2013

2014

2015

2016

2017

2018

2019

2020

2021

2022

2023

2024

2025

2026

2027

2028

2029

2030

2031

2032

2033

2034

2035

2036

2037

2038

2039

2040

2041

2042

2043

2044

2045

2046

2047

2048

2049

2050

2051

2052

2053

2054

2055

2056

2057

2058

2059

2060

2061

2062

2063

2064

2065

2066

2067

2068

2069

2070

2071

2072

2073

2074

2075

2076

2077

2078

2079

2080

2081

2082

2083

2084

2085

2086

2087

2088

2089

2090

2091

2092

2093

2094

2095

2096

2097

2098

2099

2100

2101

2102

2103

2104

2105

2106

2107

2108

2109

2110

2111

2112

2113

2114

2115

2116

2117

2118

2119

2120

2121

2122

2123

2124

2125

2126

2127

2128

2129

2130

2131

2132

2133

2134

2135

2136

2137

2138

2139

2140

2141

2142

2143

2144

2145

2146

2147

2148

2149

2150

2151

2152

2153

2154

2155

2156

2157

2158

2159

2160

2161

2162

2163

2164

2165

2166

2167

2168

2169

2170

2171

2172

2173

2174

2175

2176

2177

2178

2179

2180

2181

2182

2183

2184

2185

2186

2187

2188

2189

2190

2191

2192

2193

2194

2195

2196

2197

2198

2199

2200

2201

2202

2203

2204

2205

2206

2207

2208

2209

2210

2211

2212

2213

2214

2215

2216

2217

2218

2219

2220

2221

2222

2223

2224

2225

2226

2227

2228

2229

2230

2231

2232

2233

2234

2235

2236

2237

2238

2239

2240

2241

2242

2243

2244

2245

2246

2247

2248

2249

2250

2251

2252

2253

2254

2255

2256

2257

2258

2259

2260

2261

2262

2263

2264

2265

2266

2267

2268

2269

2270

2271

2272

2273

2274

2275

2276

2277

2278

2279

2280

2281

2282

2283

2284

2285

2286

2287

2288

2289

2290

2291

2292

2293

2294

2295

2296

2297

2298

2299

2300

2301

2302

2303

2304

2305

2306

2307

2308

2309

2310

2311

2312

2313

2314

2315

2316

2317

2318

2319

2320

2321

2322

2323

2324

2325

2326

2327

2328

2329

2330

2331

2332

2333

2334

2335

2336

2337

2338

2339

2340

2341

2342

2343

2344

2345

2346

2347

2348

2349

2350

2351

2352

2353

2354

2355

2356

2357

2358

2359

2360

2361

2362

2363

2364

2365

2366

2367

2368

2369

2370

2371

2372

2373

2374

2375

2376

2377

2378

2379

2380

2381

2382

2383

2384

2385

2386

2387

2388

2389

2390

2391

2392

2393

2394

2

INTRODUCTION

As an outgrowth of recent studies assessing the utility and effectiveness of lighter-than-air vehicles in maritime patrol functions, an experimental model flight test program is being initiated at this Center. A 32-foot long 1/10 scale flying model is under construction which will be used to gain data on the controllability of tilt-rotor VTOL airships operating near neutral buoyancy. Initially, a twin rotor design will be tested, using rotors scaled to represent those on the NASA/Bell XV-15 research aircraft. Follow-on testing is planned for tri- and quadrotor configuration modifications using the same baseline hull and empennage.

BACKGROUND

Airships ceased operation in the Navy in 1962 for reasons that continue to arouse controversy at the present time. The recognition of an energy shortage in 1974 and the since escalating cost of petroleum has resulted in a series of paper studies hypothesizing second generation airships with "precision hover capability" performing missions which emphasize endurance over speed. When it is assumed that the inherent fuel economy of an airship is not defeated by the implementation of an as yet undefined hoverable propulsive lift system, such vehicles take on high stature as candidate patrol/surveillance platforms. Limited conceptual design studies have been conducted by industry under NASA and Navy contracts and have suggested, without a great deal of analytical substantiation, several propulsive lift systems on a conventional non-rigid airship hull.

PROPOSED CONCEPTUAL DESIGNS

In the patrol class of mission, long duration on station in a loiter mode drives the design toward a fully buoyant conventional airship, as opposed to a hybrid with aerodynamic lift from a shaped body supplementing the buoyant lift. Ordinarily, the installed power would solely be determined by drag at a transit or dash speed. By stipulating a true VTOL capability at takeoff, the propulsion may be sized by the degree of heaviness that exists at takeoff with full fuel, which in turn is a function of specific fuel consumption, range to station, time on station, and ground rules concerning mid-mission refueling and ballasting. Typically, the buoyancy ratio (β) at takeoff is about 0.85. A propulsive lift system must then provide thrust slightly greater than 15% of the takeoff gross weight, as a minimum.

The number and placement of propulsive lift devices is determined by the desire to provide controllability in hover. Several companies have espoused their own preferred configurations, as shown in the accompanying figures.

The quadrotor shown in Figure 1, originated by the Piasecki Aircraft Company, mounts four fixed helicopter rotors for lift, attitude control, and translational thrust. Forward thrust can be augmented by adding propellers which also augments yawing moment control in hover.

A mutation of the quadrotor (Figure 2) has been proposed by Bell Aerospace Textron, where two diagonally opposed rotors carry a steady DOWN load while the others produce an equal upward force. In this way, significant rotor lift forces are available for cyclic deflection to produce translational forces and yawing moments in a neutrally buoyant state ($\beta = 1.0$).

Figure 3 depicts the trirotor proposed by the Goodyear Aerospace Corporation. Two tilting propellers are mounted forward on the hull and a third is at the stern. Movable surfaces on an inverted "V" tail supporting the stern propeller, and on the wings supporting the main propellers, provide forces and moments in the horizontal plane during hover. Hover control diminishes as β approaches unity. A notable advantage in the trirotor concept is the low speed cruise efficiency of a stern propeller. To take full advantage of this aspect of the design, the main propellers could be stopped and folded against the nacelles to reduce drag.

TWIN ROTOR DESIGN PHILOSOPHY

The Navy model under construction (Figure 4) will initially be tested as a twin rotor configuration, using a proportionately scaled propulsion system representing that of the NASA/Bell XV-15 tilt rotor research aircraft. This arrangement has been selected for initial evaluation based on the following considerations:

- The total static thrust of the XV-15 rotor system is in close proximity to that required for the 0.8 - 1.1 million cubic foot airships which match currently proposed maritime patrol mission profiles. (Reference (1))
- The development of a new engine/rotor for full scale prototyping of an airship is unlikely (at present).
- The load distribution on the twin-rotor hull is similar to that of past conventional airships.
- Simplicity of the classic airship is least compromised. (Fewest added moving parts)
- All engines and rotors sit relatively low and lend themselves to simple work stands and mobile hoists for maintenance.

MODEL FEATURES

The model being constructed is a 1/10 scale rendition of an 875,000 cubic foot maritime patrol airship. Detail design has been performed by Lancaster Analytics, Incorporated of North Canton, Ohio under NAVAIRDEVCON Contract N62269-80-M-3333. Specifications for the model are listed in Table 1.

The tiltrotor propulsive lift system uses true 1/10 scale XV-15 nacelles and rotors, with the rotor spacing increased. The rotors are placed under the center of buoyancy to avoid exciting pitch oscillations with thrust changes in hover. Power is supplied by one single-cylinder 2-cycle reciprocating Webra engine mounted inside the car and driving both rotors through a common connecting shaft. A centrifugal clutch, shown in Figure 5, engages the engine to a belt reduction drive and thence to a transmission with output shafts to each rotor outrigger. A second clutch, servo controlled, is mounted on the starboard outrigger shaft to allow disengagement of that rotor for single rotor demonstrations. 90° gearboxes in each nacelle output short shafts turning at 1475 rpm to each of the three-bladed contra-rotating rotors. Servoes in each nacelle control cyclic and collective pitch through a conventional swashplate and pitch link system. Rotor system detail design and fabrication was performed by Faye Peoples, Incorporated of Warminster, Pennsylvania under NADC Contract No. N62269-80-M-5159.

The 32-foot long, 875 cubic foot hull is a non-rigid envelope made up in 12 gores from 3.8 oz. rip-stop nylon coated with a white urethane finish. To simplify knockdown and reerection of the model for transport, no internal suspension cables or ballonets are used. The car laces to the belly of the bag through the fabric fillet or car fairing. The welded aluminum tube truss frame of the car (Figure 6) extends up into a notch in the bag to form a rigid tunnel for the carry-through structure of the outriggers.

To compensate for changes in helium volume due to leakage and variations in ambient air pressure and temperature, an external bladder or nurse bag will be connected to the hull through a valve built integral with the mooring fitting on the bow. This system is designed to maintain nominally 2-1/2" of water pressure in the hull when moored.

MOORING SYSTEM

Again in the interest of providing a quick knockdown and reassembly capability, the normal stiffening battens on the bow of the model have been deleted in favor of a large welded truss cone permanently attached through a universal joint to the mobile mooring mast (Figure 7). The cone assembly is made from 6061 aluminum tubing and sheet stock. The tripod mast is steel tubing, mounted on casters for easy towing. Ballast and tie down fittings are provided. The mooring system is designed to restrain the model in a 90 KT wind.

FLIGHT CONTROL SYSTEM

Commercial Kraft radio control equipment is employed to operate the rotor system and the tail surfaces. Four receivers are used to provide signals to 14 command channels. Each of three fins houses a receiver and servo to move the control surface attached, one rudder and two ruddervators in the inverted "Y" tail arrangement. This avoids long wire runs and connectors on the envelope. Antennas are integral within each fin.

The rotor system is operated by the fourth receiver mounted inside the car which controls engine throttle setting, tilt of the nacelles, and rotor cyclic pitch (2 axes).

FABRICATION STATUS

Rotor System

The entire power train, including engine, clutches, belt drive reduction, torque tubes, drive shafts, nacelles and 3-bladed rotors is expected to enter runup testing at the contractor's facility in July 1981.

Hull (Bag)

The 875 cubic foot envelope is the subject of a competitive procurement with bids expected from the following three firms:

- a. ILC Dover
Frederica, Delaware
- b. L'Garde, Inc.
Newport Beach, California
- c. Raven Industries, Inc.
Sioux Falls, South Dakota

This procurement will also provide the car fairing and the nurse bag.

CAR, EMPENNAGE, MOORING MAST

These items are being fabricated by the model shop at the NASA Ames Research Center under MIPR No. N62269-81-MP-00036.

TEST PLAN

Initial flights will be inside the hangars at NAVAIRDEVCON. A lightweight instrumentation package will be fitted to record roll, pitch, and yaw attitudes in response to control inputs in a turbulence free indoor environment. As confidence and skill develops, full transitions will be conducted inside one of the remaining airship hangars at the Naval Air Engineering Center, Lakeland, New Jersey.

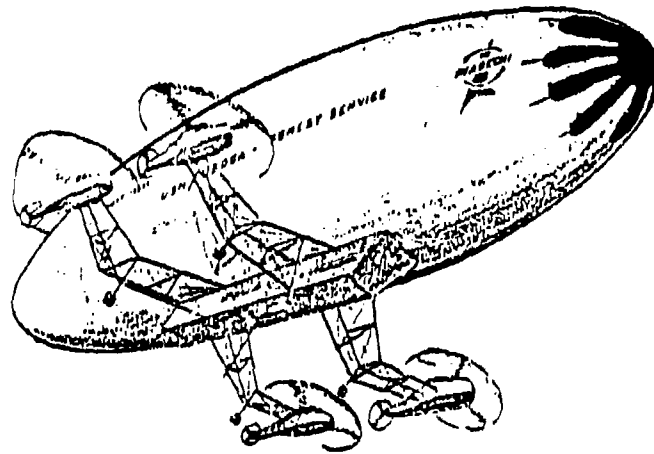


FIGURE 1. Piasecki "Helistat" Quadrotor Heavy-Lift Airship for U.S. Forest Service (Artist's Rendering).

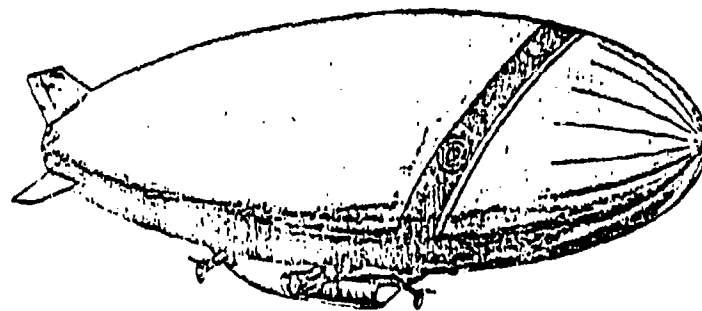


FIGURE 2. Bell Aerospace Textron Quadrotor Patrol Airship for U.S. Coast Guard (Artist's Rendering).

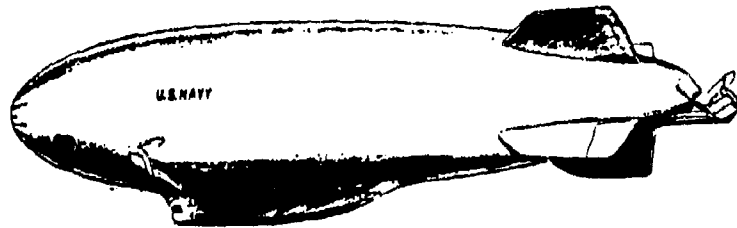


FIGURE 3. Goodyear Aerospace Trirotor Patrol Airship (Artist's Rendering).

Table 1: Model Specifications

Hull Volume	875 cu ft
Fineness Ratio	4.37
Length	32.1 ft
Maximum Diameter	7.47 ft
Gross Static Lift	57.5 lbs
Empty Weight	56.8 lbs
Static Rotor Thrust	15.6 lbs
Rotor Diameter	30 in
Maximum Speed	35 KT

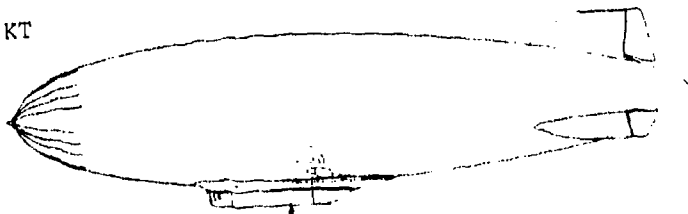



FIGURE 4. General Arrangement Drawing of 1/10 Scale Twin-Rotor Patrol Airship Flying Model.

Engine

Wetru "Speed 91"
1.9 hp @ 12000 rpm

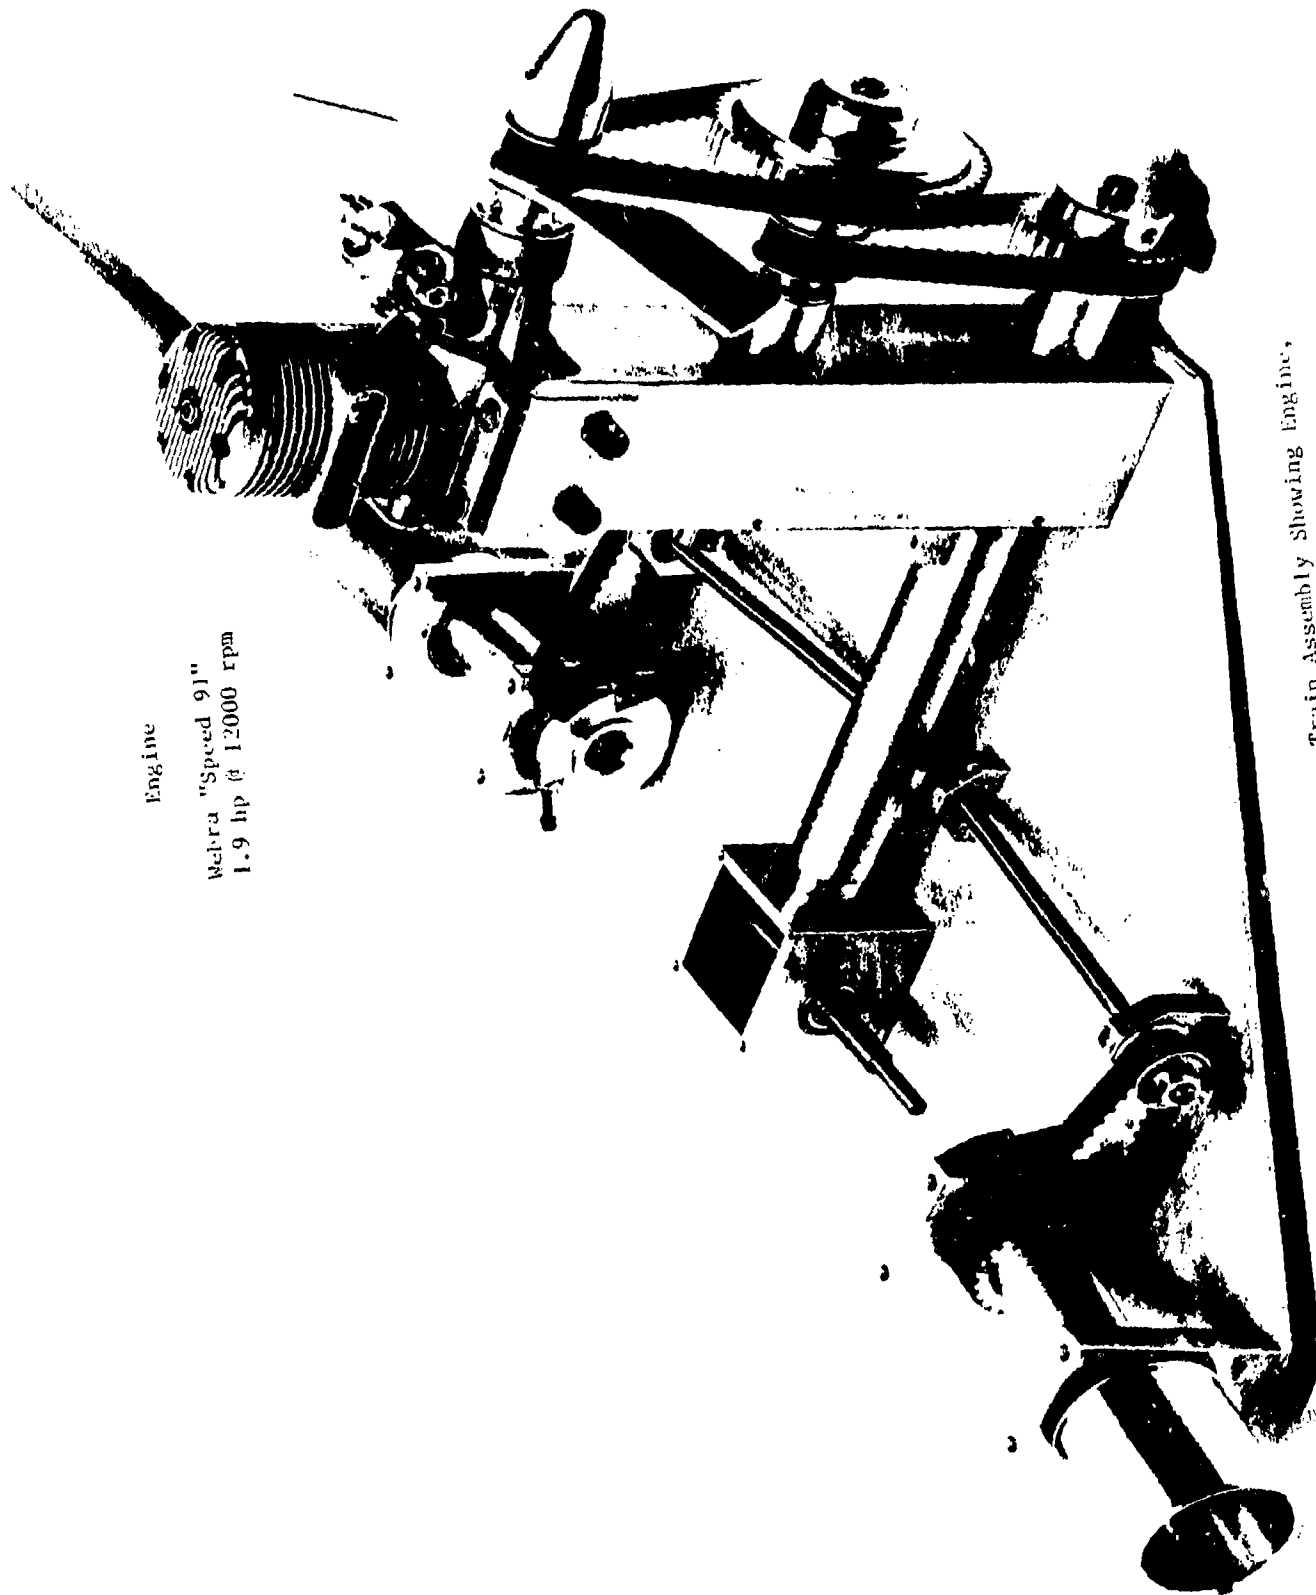


FIGURE 5. Partially Completed Power Train Assembly Showing Engine, Centrifugal Clutch, and Reduction Belt Drive.

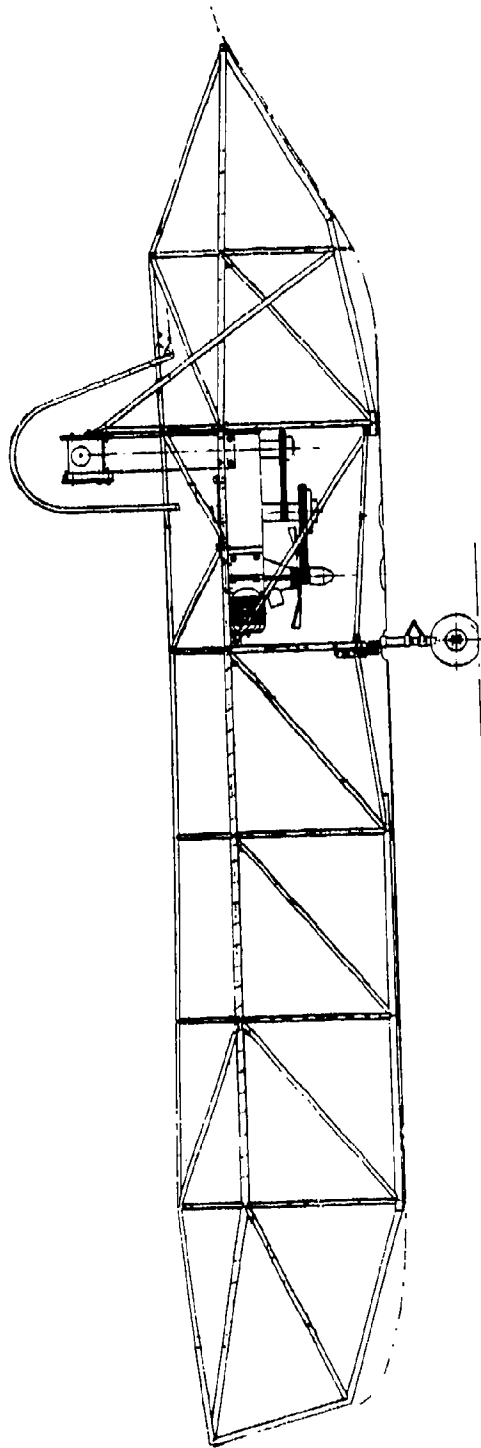


FIGURE 6. Car Frame Side View Showing Drive System Installation and Landing Gear.

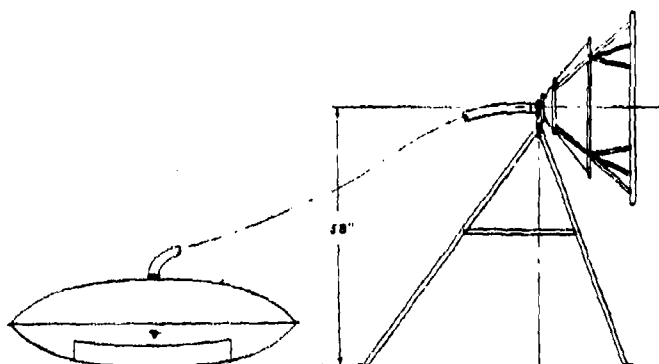


FIGURE 7. Mooring Mast and Cone Assembly With Nurse Bag.