

AD-A105 227

HOFFMAN MARITIME CONSULTANTS INC GLEN HEAD NY
USER MANUAL FOR PROGRAM STATIC -- FIRST PART OF COAST GUARD SHI--ETC(U)
JUL 79 T E ZIELINSKI
DOT-C6-74080-B

F/G 20/4

DOT-C6-74080-B

UNCLASSIFIED


HMC-79141

USCG-M-6-79

NL

1 of 2

AD-A
105227

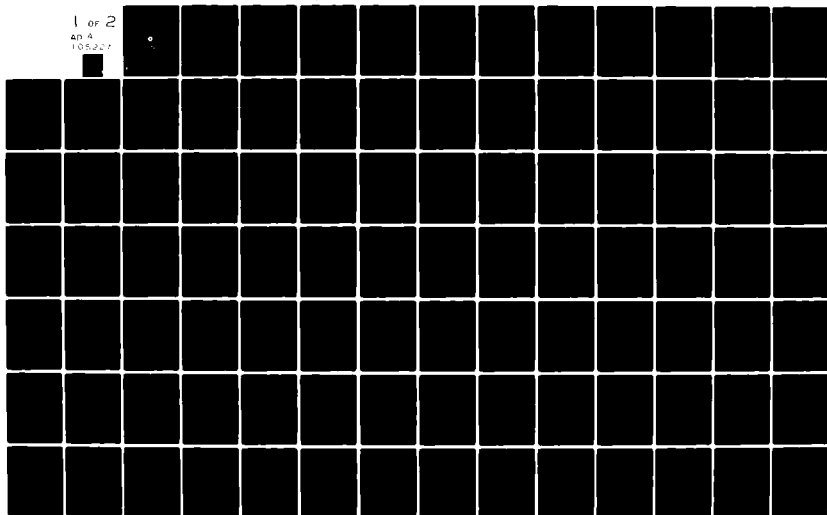

REPORT NO. CG-M-6-79

LEVEL

12

AD A105227

6
**USER MANUAL FOR PROGRAM STATIC
—FIRST PART OF COAST GUARD
SHIP MOTION PROGRAM.**

10 Thomas E. Zielinski

Hoffman Maritime Consultants

14 HMC-79141



DOT-CG-74PSP-E1

11 7122G 111

10 6-17

11
9 JUL 1979
FINAL REPORT.

12 142

DOCUMENT IS AVAILABLE TO THE U.S. PUBLIC THROUGH THE
NATIONAL TECHNICAL INFORMATION SERVICE
SPRINGFIELD, VIRGINIA 22161

DTIC
SELECTED
OCT 5 1981

A

PREPARED FOR

**U.S. DEPARTMENT OF TRANSPORTATION
UNITED STATES COAST GUARD
OFFICE OF MERCHANT MARINE SAFETY
WASHINGTON, D.C. 20593**

81 10 2 113

44829

DTIC FILE COPY

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

The contents of this report do not necessarily reflect the official view or policy of the Coast Guard; and they do not constitute a standard, specification, or regulation.

This report, or portions thereof may not be used for advertising or sales promotion purposes. Citation of trade names and manufacturers does not constitute endorsement or approval of such products.

Technical Report Documentation Page

1. Report No. CG-M-6-79	2. Government Accession No. <i>AD-A105227</i>	3. Recipient's Catalog No.	
4. Title and Subtitle User Manual for Program STATIC First Part of U.S.C.G. Ship Motion Program		5. Report Date July 1979	6. Performing Organization Code
		8. Performing Organization Report No. 79141	
7. Author(s) Thomas E. Zielinski		10. Work Unit No. (TRAIS)	
9. Performing Organization Name and Address Hoffman Maritime Consultants Inc. 9 Glen Head Road Glen Head, New York 11545		11. Contract or Grant No. CG-74080-B	
		13. Type of Report and Period Covered Final Manual	
12. Sponsoring Agency Name and Address Commandant (G-MMT-4/13) U.S. Coast Guard 2100 2nd Street, S.W. Washington, D.C. 20593		14. Sponsoring Agency Code	
15. Supplementary Notes Program SCOMOT is proprietary software. It has been made available to the U.S.C.G. and is intended for their internal use.			
16. Abstract A description of program STATIC, the first part of the revised and enhanced SCORES program is presented with the theoretical basis, organization and structure, data input and output format described. A sample computation using the SL-7 containership is included to aid in the understanding of the input and output format. The program has two major functions: calculating the hydrostatic properties of a vessel and preparing the two dimensional hydrodynamic properties for the ship motion program SCOMOT. The curves of form, shear force and bending moment, grounding, intact stability, balancing of buoyancy and weight forces and other calculations can be performed for both still water and quasi-static conditions. The two dimensional added mass and damping for heave, sway, roll and roll-sway cross coupling are calculated for each section using either a multi-efficient conformal mapping technique of the Frank Close Fit method.			
17. Key Words Hydrostatics, curves of form, shear force, bending moment, grounding intact stability, balancing, quasi-static, two dimensional added mass and damping, conformal mapping, Frank Close Fit, SL-7		18. Distribution Statement This document is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22161	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 81 Text 55 Appendix	22. Price

	<u>Page</u>
ABSTRACT	
I. INTRODUCTION	1
II. OUTLINE OF THEORY	
A. Hydrostatic Calculations	3
B. Hydrodynamic Calculations	6
III. DESCRIPTION OF INPUT SCHEME	
A. Physical Description of Ship	
1. Geometry	23
2. Weight	27
B. Condition Information	31
C. Data Card or Data File Input Description	36
D. Sample Input	54
1. TERMINAL	56
2. UNITS	57
3. OFFSETS	59
4. DRAFT	60
5. GROUNDING	65
6. INTACT STABILITY	68
7. COEFFICIENT	71
IV. DESCRIPTION OF OUTPUT SCHEME	73
V. TIMING AND ERROR MESSAGES	77
VI. REFERENCES	80
APPENDIX A - Sample Output	A1 - A54
APPENDIX B - Job Control Files	B1

STATIC Program - User Manual
Record of Changes

Date	Module/ Subroutine	Page	Description

ABSTRACT

A description of program STATIC, the first part of the revised SCORES program, developed by Hoffman Maritime Consultants (HMC) for use by the U.S. Coast Guard, is presented. This program has two major functions; calculating hydrostatic properties of a vessel and preparing data for the ship motion computations. The curves of form, shear force and bending moment, grounding, intact stability, balancing of buoyancy and weight forces and other calculations can be performed for both static and quasi-static conditions. The two-dimensional added mass and damping for heave, sway and roll are calculated for each ship's section and stored as input for the ship motion program SCOMOT. Program theory, organization and structure, data input and output format are described. A sample computation is included to aid in the understanding of input and output formats.

I. INTRODUCTION

Program STATIC is a two part procedure that first calculates geometric quantities and then two-dimensional hydrodynamic data required for the new modified SCORES program (1)*. The first part of this program has similar capabilities to the Ship Hull Characteristics Program (SHCP) (2) but can perform many other tasks of specialized nature. Hydrostatics, curves of form, shear force and bending moment, grounding, intact stability and balancing of the vessel are specific tasks that can be performed. The quasi-static case, that is the ship poised in an oblique sea of any amplitude, wave length and phase as well as still water case for these calculations can be handled. Preparation of geometric description files for the Springing (3) and Motion (1) programs is also done by the first part of Program STATIC.

The primary calculation of the second part of STATIC is of two-dimensional hydrodynamic properties using the conformal mapping approach (4)(5)(6) and the Frank close fit technique (7)(8). The two-dimensional added mass and damping for heave, sway, roll and sway-roll cross couplings are calculated for each section at twenty-five frequencies. This program thereby separates the lengthy calculations of two-dimensional added mass and damping from the motion calculations by storing these results in a two-dimensional properties (TDP) file which is read by motions program SCOMOT.

Program STATIC is a separate program in the modified SCORES procedure, with a standalone capability. STATIC's greatest asset is that its operation is very simple. The command language used in its input scheme does not require strict formatting or remembering of lengthy input sequences and resembles a conversational type input.

STATIC is written in the FORTRAN IV language, checked out and run on the United Computing Services (UCS) CDC-6600

*Numbers in parentheses refer to list of references at end of this report.

computer system.

The method of analysis is outlined below in Section II. The type of inputting scheme, which facilitates the running of the hydrostatic and two-dimensional hydrodynamic quantities will be described in Section III.

Typical runs showing input and output will be shown in Section IV. Section V will contain error messages and their meaning as well as typical running times for various tasks.

II. OUTLINE OF THEORY

The basic analysis used in STATIC can be divided into two topics:

- A) Hydrostatic properties and static shear force and bending moment
- B) Hydrodynamic calculations using either conformal mapping or Frank close fit techniques.

The two areas will be discussed in the next two sections.

A. Hydrostatic Calculations

Since the first topic is extensively covered in most naval architecture textbooks (9)(10) only a short summary and explanation of unique calculations will be given in this section.

Table 1.1 shows a typical hydrostatic output for a vessel at an even keel draft. Using several of these tables for various drafts enables the drawing of a curve of form, Figure 1.1

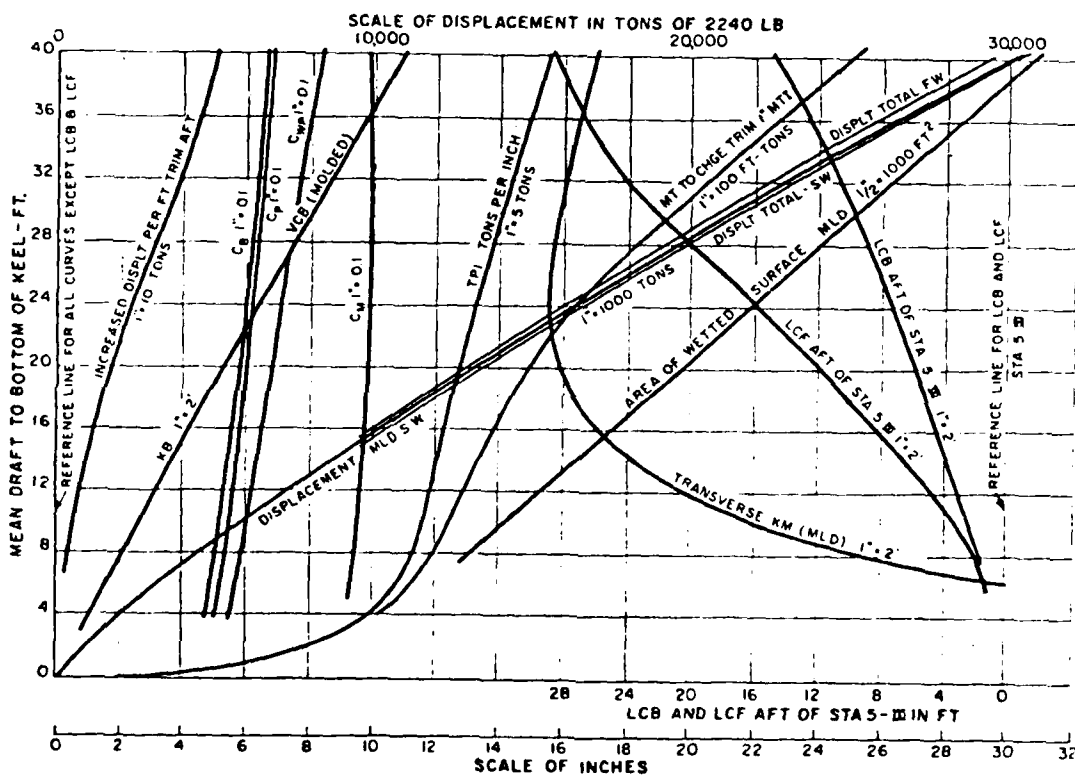


Figure 1.1 Displacement and other curves of form (8)

HYDROSTATICS

SEA-LAND 7 CONTAINERSHIP

-4-

STATION FROM F.P.	MEAN DRAFT (FEET)	BEAM (FEET)	AREA (FEET **2)	S.A. COEF.	VCB (FEET)	HCB (FEET)
0.0000	32.0000	0.0000	223.395	1.00000	10.2856	0.0000
11.0063	32.0000	2.0828	254.595	3.81988	11.5951	0.0000
22.0125	32.0000	2.9063	276.908	2.97745	12.1516	0.0000
44.0250	32.0000	5.8277	334.682	1.79468	13.2493	0.0000
66.0375	32.0000	9.6732	398.797	1.28835	14.3146	0.0000
88.0500	32.0000	15.4573	486.653	.98387	15.4437	0.0000
110.0625	32.0000	21.4845	584.891	.85074	16.4863	0.0000
132.0750	32.0000	28.4810	702.126	.77039	17.2379	0.0000
176.1000	32.0000	44.2626	1013.900	.71583	18.2078	0.0000
220.1250	32.0000	59.9864	1389.990	.72412	18.4163	0.0000
264.1500	32.0000	74.5541	1803.131	.75580	18.1851	0.0000
308.1750	32.0000	87.0524	2237.807	.80333	17.8366	0.0000
352.2000	32.0000	96.7617	2638.511	.85213	17.4280	0.0000
396.2250	32.0000	103.0452	2949.063	.89435	17.0969	0.0000
440.2500	32.0000	105.4858	3149.362	.93299	16.8180	0.0000
484.2750	32.0000	105.5000	3194.614	.94627	16.7137	0.0000
528.3000	32.0000	105.5000	3152.395	.93377	16.8377	0.0000
572.3250	32.0000	105.5000	3049.651	.90333	17.1364	0.0000
616.3500	32.0000	105.3572	2857.579	.84759	17.6514	0.0000
660.3750	32.0000	102.8107	2537.426	.77127	18.4691	0.0000
704.4000	32.0000	94.8440	2101.474	.69241	19.3413	0.0000
748.4250	32.0000	82.5323	1576.490	.59692	20.3563	0.0000
770.4375	32.0000	74.1002	1301.971	.54908	20.8848	0.0000
792.4500	32.0000	60.6923	1024.554	.52754	21.3989	0.0000
814.4625	32.0000	54.3116	767.438	.44157	21.9455	0.0000
836.4750	32.0000	42.7778	464.400	.51754	24.3791	0.0000
858.4875	32.0000	30.3031	231.897	.49068	26.3954	0.0000
869.4938	32.0000	23.9115	125.920	.58291	28.4712	0.0000
880.5000	32.0000	16.9388	60.208	.61781	29.7100	0.0000
902.5125	32.0000	3.6812	2.739	.50000	31.5039	0.0000

VOLUME (MLD.)

1620237.8 FEET **3

DISPLACEMENT (MLD.)

46292.509 L.TONS

BLOCK COEFFICIENT (MLD.)

.545137

HALF-AREA MIDSHIP SECTION

1574.681 FEET **2

MIDSHIP SECTION COEFFICIENT

.932994

PRISMATIC COEFFICIENT (MLD.),

.584288

TRIM

0.000 FEET

HEEL

0.000 DEGREES

VCB (FROM B.L.)

17.782 FEET

HCB (FROM C.L.)

0.000 FEET

LCB (FROM F.P.)

477.509 FEET

BM, TRANSVERSE

27.351 FEET

BM, LONGITUDINAL

1471.064 FEET

MOMENT TO ALTER TRIM 0.1 FEET

7734.158

L.TONS PER 0.1 FEET IMMERSION

181.422

AREA OF WATERPLANE

63497.560 FEET **2

WATERPLANE COEFFICIENT (MLD.)

.683650

L.C.F. FROM F.P.

499.798 FEET

CHANGE IN DISPL. FOR 1 FEET TRIM AFT

-122.695 L.TONS

WETTED SURFACE (MLD.)

98304.577 FEET **2

The cross curves of stability and bending moment and shear force calculations (9) are also performed.

One of the unique features of STATIC is the ability to analyze a ship in a quasi-static condition. A ship can be frozen in a wave, which is comprised of several sine waves of varying amplitude, wave length, phase and heading. This is extremely important in considering the fluctuations in bending moment due to the sea. It has also been shown by Paulling (11) that the ship's static stability is very sensitive to a seaway.

An additional calculation performed by program STATIC is grounding. When a vessel runs aground, the ocean floor exerts a force on the vessel which causes the vessel to rise and trim. The maximum bending moment is affected by the grounding force and is a subject of concern for the U.S.C.G.

One important point needs mentioning in the hydrostatic calculations; all integrations and interpolations are linear. Straight line interpolation and trapazoidal integrations are used.

The specific hydrostatic procedures and options of program STATIC are discussed in Chapter III.

B. Hydrodynamic Calculations

The choice of two methods of analysis in the hydrodynamic calculations was necessary to handle a wider variety of ship sections. Each method has its advantages as well as shortcomings. Therefore, a brief description of each shall be given.

The conformal mapping technique involves the representation of a ship's section by a Fourier-like series whose coefficients are called mapping coefficients. Once the mapping coefficients are known, it is relatively a straight-forward procedure to obtain the hydrodynamic quantities; therefore, the basic problem is the mapping of the ship's section. Most normal ship sections can be adequately described by mapping coefficients but certain sections such as completely submerged sections and bulbous bows cannot be mapped.

A ship's section can be handled by the close fit method which utilizes the Green function to represent pulsating sources below the free surface. Most sections can be handled using this analysis, but a very serious drawback does exist. It can be shown that a set of discrete "irregular" frequencies in the Green's function-integral equation failed to give a solution. In the area around each of these frequencies, the results are also unreliable but they are usually at a high frequency and out of the range of interest. As the beam to draft ratio becomes large, these "irregular" frequencies approach the operating frequencies and seriously effect the accuracy of the results.

The conformal mapping technique does not have this problem, so that it was chosen as the preferable method of analysis. If a section could not be represented by mapping coefficients, the close fit method was chosen. It was found that both methods required approximately the same computation time for comparable accuracy.

The conformal mapping technique discussion is divided into two parts; the mapping of a section and the hydrodynamic properties once the mapping coefficients are known. The close fit method will also be discussed.

1. Conformal Mapping Technique

The one-to-one correspondence between the points on two distinct planes expressed by a single analytical function is the basis of conformal mapping. It finds application to ship problems when shapes whose equations and properties are unknown, can be mapped into shapes whose equations and properties are known in another plane. Most ship sections can be conformally mapped onto a circle of unit radius. The flow about an infinite cylinder of unit radius is known, therefore, the ship's section flow can be determined from the mapping transformation.

a) The Representation of Ship Sections by Conformal Mapping

The particular method discussed below was originally developed in (4) and has since been modified and updated in (5) and (12). The method described here is from (4). It is desired to represent a ship's section by the following equations:

$$x(\theta) = a_0 \sin \theta - \sum_{m=1}^N a_{2m-1} \sin (2_{m-1}) \theta \quad [1]$$

$$y(\theta) = a_0 \cos \theta + \sum_{m=1}^N a_{2m-1} \cos (2_{m-1}) \theta \quad [2]$$

where $a_0, a_1, a_3 \dots a_{2n-1}$ are the mapping coefficients, θ is the angle in the plane of the circle (note it is not in the plane ship), and

N is the number of mapping coefficients.
Figure 1 shows a typical ship's section.

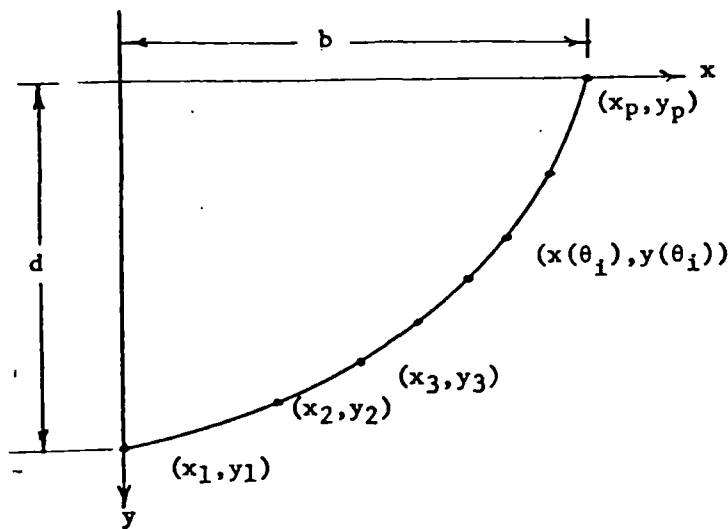


Figure 1.2

As can be seen from Equation 1 and 2, the unknowns are $a_0, a_1, a_3 \dots a_{2n-1}$, and θ . It is not possible to obtain an analytic solution of $N > 2$. Therefore, an iterative approach must be used. The values of x_i and y_i along the section contour are given to define the section.

The value of x and y for a specific value of θ and the mapping coefficients can be determined from the equation given above. However, x and y are the known quantities and the coefficients cannot be solved for directly, because the values of θ also depend on the coefficients. The first guess at the coefficients can be made rather arbitrarily, so long as the assumed curve does not deviate too far from the actual section shape. The better the guess, the fewer number of iterations to convergence. For this reason, a two-parameter mapping developed by Lewis (13) based

upon the beam, draft and section area in use. Once the mapping coefficients are known, it is necessary to find a θ_i that represents x_i and y_i . This is performed by assuming that the points $x(\theta_i)$ and $y(\theta_i)$ be on the same radial line as x_i and y_i (See Figure 2).

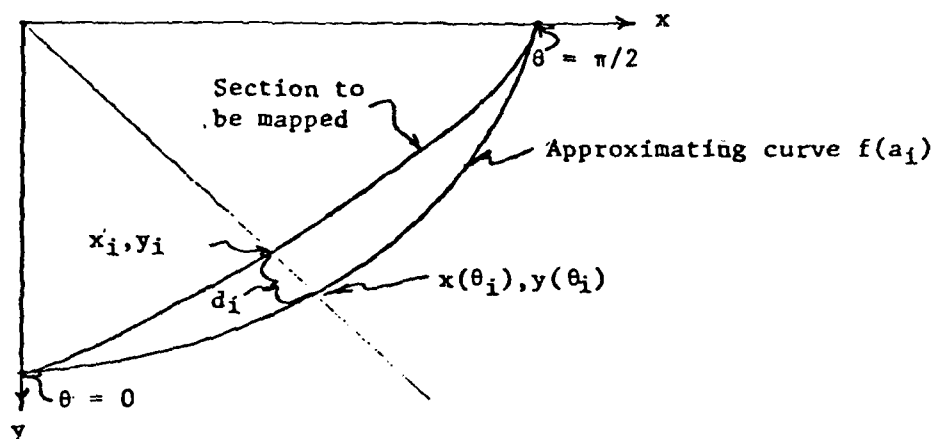


Figure 2

This can be re-stated as:

$$\frac{y(\theta_i)}{x(\theta_i)} = \frac{y_i}{x_i} \quad [3]$$

which can be re-written as:

$$y(\theta_i) x_i - x(\theta_i) y_i = 0. \quad [4]$$

This equation is solved using an iterative procedure based on a combination of the "secant" and "regular-falsi" methods. This procedure assumes the mapping coefficients (a_i 's) are known and solves for the angles (θ_i 's).

Now a least squares technique is used to determine the mapping coefficients (a_i 's) assuming that

the angles (θ_i 's) are correct. First a set of linear equations in the coefficients a_n may be set up in the following manner. The squared distance between any two points on a radial line between the actual and calculated curve is as follows:

$$e_i = d_i^2 = [x(\theta_i) - x_i]^2 + [y(\theta_i) - y_i]^2 \quad [5]$$

or substituting equations [1] and [2] into [5]

$$e_i = \left\{ a_0 \sin \theta_i - \sum_{m=1}^N a_{2m-1} \sin (2m-1) \theta_i - x_i \right\}^2 + \left\{ a_0 \cos \theta_i + \sum_{m=1}^N a_{2m-1} \cos (2m-1) \theta_i - y_i \right\}^2 \quad [6]$$

Taking the sum of the above distances for each input point along the curve gives:

$$E = \sum_{i=1}^P e_i \quad [7]$$

where there are P input points. Minimizing this sum with respect to each of the coefficients a_m gives what is called a least squares fit to the curve ($\theta = \theta_i$ is considered constant).

$$\frac{\partial E}{\partial a_m} = 0 \quad m = 0, 1, 3, 5, \dots, 2N-1 \quad [8]$$

This will yield N+1 linear equations in $a_0, a_1, a_3 \dots$ where N+1 is the number of coefficients.

The values of a_m can then be computed so as to provide a solution for each of the equations. A matrix solution was chosen to accomplish this. The matrix solution is of the form:

$$X = [A]^{-1} B \quad [9]$$

Each component is as follows:

$$X = \begin{Bmatrix} a_0 \\ a_1 \\ a_3 \\ a_5 \\ a_7 \\ \vdots \\ a_{2N-1} \end{Bmatrix} \quad [10]$$

$$A = \begin{Bmatrix} P & \sum \cos 2\theta & \sum \cos 4\theta & \dots \sum \cos 2N\theta \\ \sum \cos 2\theta & P & \sum \cos 2\theta & \dots \sum \cos 2(N-1)\theta \\ \sum \cos 4\theta & \sum \cos 2\theta & P & \dots \sum \cos 2(N-2)\theta \\ \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot \\ \sum \cos 2N\theta & \sum \cos 2(N-1)\theta & \cdot & \cdot & P \end{Bmatrix} \quad [11]$$

$$B = \begin{Bmatrix} \sum y \cos \theta + x \sin \theta \\ \sum y \cos \theta - x \sin \theta \\ \sum y \cos 3\theta - x \sin 3\theta \\ \vdots \\ [\sum y \cos (2N-1)\theta - x \sin (2N-1)\theta] \theta \end{Bmatrix} \quad [12]$$

where all the summations are from 1 to P for each point on the curve.

b) Hydrodynamic Coefficients Using Conformal Mapping

The basic method used for the hydrodynamic portion was developed by Hoffman (4) for the case of vertical motions. It was later extended by van Hooff (6) based on the theory of Hoffman (4), Porter (14), and Ursell (15) for the case of lateral motions. HYDRO2D is based on the conformal mapping method (6) and the Frank close fit method (16).

Since a detailed development of the theory is given in (6), only a summary of the equations shall be given.

The section is defined by, as mentioned previously, the following equations:

$$x = x(\theta) = a_0 \sin \theta - \sum_{m=1}^N a_{2m-1} \sin (2m-1) \theta \quad [13]$$

$$y = y(\theta) = a_0 \cos \theta + \sum_{m=1}^N a_{2m-1} \cos (2m-1) \theta \quad [14]$$

whose derivatives are:

$$\frac{dx}{d\theta} = \frac{dx(\theta)}{d\theta} = a_0 \cos \theta - \sum_{m=1}^N (2m-1) a_{2m-1} \cos (2m-1) \theta \quad [15]$$

$$\frac{dy}{d\theta} = \frac{dy(\theta)}{d\theta} = -a_0 \sin \theta - \sum_{m=1}^N (2m-1) a_{2m-1} \sin (2m-1) \theta \quad [16]$$

The hydrodynamic calculations are divided into vertical and lateral motions for a frequency, ω , or wave number, $k = \omega^2/g$.

Vertical Motion

The added mass, A'_{33} , and damping, N'_Z , at a specific frequency are given as follows:

$$A'_{33} = 2\rho \int_0^{\pi/2} P_{aH}(\theta) \frac{dx}{d\theta} d\theta \quad [17]$$

$$N'_z = 2\rho\omega \int_0^{\pi/2} P_{vH}(\theta) \frac{dx}{d\theta} d\theta \quad [18]$$

where ρ is the mass density of the medium and ω is the wave frequency, $P_{aH}(\theta)$ is the hydrodynamic pressure in phase with acceleration and $P_{vH}(\theta)$ is in phase with the velocity as shown below:

$$P_{aH}(\theta) = b \frac{M_H(\theta) B_H + N_H(\theta) A_H}{A_H^2 + B_H^2} \quad [19]$$

$$P_{vH}(\theta) = b \frac{M_H(\theta) A_H - N_H(\theta) B_H}{A_H^2 + B_H^2} \quad [20]$$

where:

b = half beam of section

A_H = stream function in phase with acceleration

$$= \psi_{cH} \left(\frac{\pi}{2} \right) + \sum_{m=1}^{\infty} p_{2mH} \psi_{2mH} \left(\frac{\pi}{2} \right) \quad [21]$$

B_H = stream function in phase with velocity

$$= \psi_{sH} \left(\frac{\pi}{2} \right) + \sum_{m=1}^{\infty} q_{2mH} \psi_{2mH} \left(\frac{\pi}{2} \right) \quad [22]$$

$M_H(\theta)$ = sine component of the velocity potential at an arbitrary point on the contour

$$= \phi_{sH}(\theta) + \sum_{m=1}^{\infty} q_{2mH} \phi_{2mH}(\theta) \quad [23]$$

$N_H(\theta)$ = cosine component of the velocity potential at an arbitrary point on the contour

$$= \phi_{cH}(\theta) + \sum_{m=1}^{\infty} p_{2mH} \phi_{2mH}(\theta) \quad [24]$$

The cosine component of the multiple potential p_{2mH} and sine component q_{2mH} are found by a least squares involving the solution of the following matrix equations:

$$p_{2mH} = [X]^{-1} Y_1 \quad [25]$$

$$q_{2mH} = [X]^{-1} Y_2 \quad [26]$$

where:

$$X = X_{ij} = \int_0^\pi D_{iH}(\theta) D_{jH}(\theta) d\theta \quad [27]$$

$$Y_1 = Y_{1j} = \int_0^\pi D_{jH}(\theta) \left[\psi_{cH}(\theta) - \left(\frac{x}{b}\right) \psi_{cH}\left(\frac{\pi}{2}\right) \right] d\theta \quad [28]$$

$$Y_2 = Y_{2j} = \int_0^\pi D_{jH}(\theta) \left[\psi_{sH}(\theta) - \left(\frac{x}{b}\right) \psi_{sH}\left(\frac{\pi}{2}\right) \right] d\theta \quad [29]$$

$$D_{iH}(\theta) = \left(\frac{x}{b}\right) \psi_{2iH}\left(\frac{\pi}{2}\right) - \psi_{2iH}(\theta) \quad [30]$$

The remaining equations are as follows:

Stream Functions:

$$\psi_{cH}(\theta) = \pi e^{-ky} \sin(kx) \quad [31]$$

$$\psi_{sH}(\theta) = \pi e^{ky} \cos(kx) + \int_0^\infty e^{-\beta x} \left[\frac{k \cos(\beta y) + \beta \sin(\beta y)}{\beta^2 + k^2} \right] d\beta \quad [32]$$

$$\psi_{2mH}(\theta) = \cos(2m\theta) - \sum_{n=1}^N \frac{k(2n-3) a_{2n-3} \cos(2m+2n-3)\theta}{2m+2n-3} \quad [33]$$

Velocity Potential Functions:

$$\phi_{cH}(\theta) = \pi e^{-ky} \cos(kx) \quad [34]$$

$$\phi_{sH}(\theta) = \pi e^{ky} \sin(kx) - \int_0^\infty e^{-\beta x} \left[\frac{\beta \cos(\beta y) - k \sin(\beta y)}{\beta^2 + k^2} \right] d\beta \quad [35]$$

$$\phi_{2mH}(\theta) = \sin(2m\theta) + \sum_{n=1}^N \frac{k(2n-3) a_{2n-3} \sin(2m+2n-3)\theta}{2m+2n-3} \quad [36]$$

Lateral Motion

The lateral motion calculations consist of added mass and damping for sway, roll, sway-roll cross coupling and roll-sway cross coupling. The equations for these values are given as follows:

$$\text{Sway Added Mass} = 2\rho \int_0^{\pi/2} P_{aS}(\theta) \frac{dy}{d\theta} d\theta \quad [37]$$

$$\text{Sway Damping} = 2\rho\omega \int_0^{\pi/2} P_{vS}(\theta) \frac{dy}{d\theta} d\theta \quad [38]$$

$$\text{Sway-Roll Added Mass} = 2\rho \int_0^{\pi/2} P_{aS}(\theta) \left(x \frac{dx}{d\theta} + y \frac{dy}{d\theta} \right) d\theta \quad [39]$$

$$\text{Sway-Roll Damping} = 2\rho\omega \int_0^{\pi/2} P_{vS}(\theta) \left(x \frac{dx}{d\theta} + y \frac{dy}{d\theta} \right) d\theta \quad [40]$$

$$\text{Roll Added Moment of Inertia} = 2\rho \int_0^{\pi/2} P_{aR}(\theta) \left(x \frac{dx}{d\theta} + y \frac{dy}{d\theta} \right) d\theta \quad [41]$$

$$\text{Roll Damping} = 2\rho\omega \int_0^{\pi/2} P_{vR}(\theta) \left(x \frac{dx}{d\theta} + y \frac{dy}{d\theta} \right) d\theta \quad [42]$$

$$\text{Roll-Sway Added Mass} = 2\rho \int_0^{\pi/2} P_{aR}(\theta) \frac{dy}{d\theta} d\theta \quad [43]$$

$$\text{Roll-Sway Damping} = 2\rho\omega \int_0^{\pi/2} P_{vR}(\theta) \frac{dy}{d\theta} d\theta \quad [44]$$

where the pressures are defined as follows:

$$P_{aS}(\theta) = d \frac{M_S(\theta) B_S + N_S(\theta) A_S}{A_S^2 + B_S^2} \quad [45]$$

$$P_{vS}(\theta) = d \frac{M_S(\theta) A_S - N_S(\theta) B_S}{A_S^2 + B_S^2} \quad [46]$$

$$P_{aR}(\theta) = \left(\frac{d^2 - b^2}{2} \right) \frac{M_R(\theta) B_R + N_R(\theta) A_R}{A_R^2 + B_R^2} \quad [47]$$

$$P_{vR}(\theta) = \left(\frac{d^2 - b^2}{2} \right) \frac{M_R(\theta) A_R - N_R(\theta) B_R}{A_R^2 + B_R^2} \quad [48]$$

where d is the section draft and b the waterline half beam. For Sway:

A_S = stream function in phase with acceleration

$$= \psi_{cS} \left(\frac{\pi}{2} \right) + \sum_{m=1}^{\infty} p_{2mS} \psi_{2mS} \left(\frac{\pi}{2} \right) \quad [49]$$

B_S = stream function in phase with velocity

$$= \psi_{sS} \left(\frac{\pi}{2} \right) + \sum_{m=1}^{\infty} q_{2mS} \psi_{2mS} \left(\frac{\pi}{2} \right) \quad [50]$$

$M_S(\theta)$ = sine component of the velocity potential at an arbitrary point on the contour

$$= \phi_{sS}(\theta) + \sum_{m=1}^{\infty} q_{2mS} \phi_{2mS}(\theta) \quad [51]$$

$N_S(\theta)$ = cosine component of the velocity potential at an arbitrary point on the contour

$$= \phi_{cS}(\theta) + \sum_{m=1}^{\infty} p_{2mS} \phi_{2mS}(\theta) \quad [52]$$

For Roll:

A_R = stream function in phase with acceleration

$$= \psi_{cR} \left(\frac{\pi}{2} \right) + \sum_{m=1}^{\infty} p_{2mR} \psi_{2mR} \left(\frac{\pi}{2} \right) \quad [53]$$

B_R = stream function in phase with velocity

$$= \psi_{sR} \left(\frac{\pi}{2} \right) + \sum_{m=1}^{\infty} q_{2mR} \psi_{2mR} \left(\frac{\pi}{2} \right) \quad [54]$$

$M_R(\theta)$ = sine component of the velocity potential
at an arbitrary point on the contour

$$= \phi_{sR}(\theta) + \sum_{m=1}^{\infty} q_{2mR} \phi_{2mR}(\theta) \quad [55]$$

$N_R(\theta)$ = cosine component of the velocity potential
at an arbitrary point on the contour

$$= \phi_{cR}(\theta) + \sum_{m=1}^{\infty} p_{2mR} \phi_{2mR}(\theta) \quad [56]$$

The cosine components of the multiple potential p_{2mS} and p_{2mR} and sine components q_{2mS} and q_{2mR} are found by a least squares fit involving the solution of the matrix equations:

$$p_{2mS} = [X_S]^{-1} Y1_S \quad [57]$$

$$q_{2mS} = [X_S]^{-1} Y2_S \quad [58]$$

$$p_{2mR} = [X_R]^{-1} Y1_R \quad [59]$$

$$q_{2mR} = [X_R]^{-1} Y2_R \quad [60]$$

where:

$$X_S = X_{ij} = \int_{\theta} D_{iS}(\theta) D_{jS}(\theta) \quad [61]$$

$$Y1_S = Y1_j = \int_{\theta} D_{jS}(\theta) \left\{ \psi_{cS}(\theta) - \psi_{cS}\left(\frac{\pi}{2}\right) - \left(\frac{Y}{d}\right) [\psi_{cS}(0) - \psi_{cS}\left(\frac{\pi}{2}\right)] \right\} \quad [62]$$

$$Y2_S = Y2_j = \int_{\theta} D_{jS}(\theta) \left\{ \psi_{sS}(\theta) - \psi_{sS}\left(\frac{\pi}{2}\right) - \left(\frac{Y}{d}\right) [\psi_{sS}(0) - \psi_{sS}\left(\frac{\pi}{2}\right)] \right\} \quad [63]$$

$$D_{jS}(\theta) = \left(\frac{Y}{d}\right) [\psi_{2jS}(0) - \psi_{2jS}\left(\frac{\pi}{2}\right)] + \psi_{2jS}\left(\frac{\pi}{2}\right) - \psi_{2jS}(\theta) \quad [64]$$

$$x_R = x_{ij} = \sum_{\theta} D_{iR}(\theta) D_{jR}(\theta) \quad [65]$$

$$y_{1R} = y_{1j} = \sum_{\theta} D_{jR} \left\{ \left(\frac{d^2 - b^2}{b^2} \right) \left[\psi_{cR}(\theta) - \psi_{cR}\left(\frac{\pi}{2}\right) \right] - \left(\frac{x^2 + y^2}{b^2} - 1 \right) \left[\psi_{cR}(0) - \psi_{cR}\left(\frac{\pi}{2}\right) \right] \right\} \quad [66]$$

$$y_{2R} = y_{2j} = \sum_{\theta} D_{jR} \left\{ \left(\frac{d^2 - b^2}{b^2} \right) \left[\psi_{sR}(\theta) - \psi_{sR}\left(\frac{\pi}{2}\right) \right] - \left(\frac{x^2 + y^2}{b^2} - 1 \right) \left[\psi_{sR}(0) - \psi_{sR}\left(\frac{\pi}{2}\right) \right] \right\} \quad [67]$$

$$D_{jR}(\theta) = \left(\frac{x^2 + y^2}{b^2} - 1 \right) \left[\psi_{2jR}(0) - \psi_{2jR}\left(\frac{\pi}{2}\right) \right] - \left(\frac{d^2 - b^2}{b^2} \right) \left[\psi_{2jR}(\theta) - \psi_{2jR}\left(\frac{\pi}{2}\right) \right] \quad [68]$$

The remaining equations are as follows:

Stream functions:

$$\psi_{cR}(\theta) = \psi_{cS}(\theta) = \pi e^{-ky} \cos(kx) \quad [69]$$

$$\begin{aligned} \psi_{sR}(\theta) &= \psi_{sS}(\theta) = \psi_{sH}(\theta) - \frac{y}{k(x^2 + y^2)} \\ &= \pi e^{ky} \sin(kx) + \int_0^{\pi} e^{-\beta x} \left[\frac{\beta \cos(\beta y) - k \sin(\beta y)}{\beta^2 + k^2} \right] d\beta \\ &\quad - \frac{y}{k(x^2 + y^2)} \end{aligned} \quad [70]$$

$$\begin{aligned} \psi_{2sR}(\theta) &= \psi_{2sS}(\theta) = -\cos(2m+1)\theta + \sum_{n=1}^N \frac{k(2n-3) a_{2n-3} \cos(2m+2n-2)\theta}{2m+2n-2} \\ &\quad [71] \end{aligned}$$

Velocity potential functions:

$$\phi_{cR}(\theta) = \phi_{cS}(\theta) = -\pi e^{-ky} \sin(kx) \quad [72]$$

$$\begin{aligned} \phi_{sR}(\theta) &= \phi_{sS}(\theta) = -\psi_{sH}(\theta) + \frac{x}{k(x^2 + y^2)} \\ &= \pi e^{ky} \cos(kx) + \int_0^{\pi} e^{-\beta x} \left[\frac{k \cos(\beta y) + \beta \sin(\beta y)}{\beta^2 + k^2} \right] d\beta + \frac{x}{k(x^2 + y^2)} \end{aligned} \quad [73]$$

$$\phi_{2mR}(\theta) = \phi_{2mS}(\theta) = \sin(2m+1)\theta - \sum_{n=1}^N \frac{k(2n-3) a_{2n-3} \sin(2m + 2n - 2)\theta}{2m + 2n - 2} \quad [74]$$

The accuracy of the least square fit for the description of p_{2m} and q_{2m} is expressed by the following equations shown in (4):

$$CHECK_H = \left| \frac{HEAVE DAMPING * (A_H^2 + B_H^2)}{\frac{1}{2} b^2 \pi^2} - 1.0 \right| \quad [75]$$

$$CHECK_S = \left| \frac{SWAY DAMPING * (A_S^2 + B_S^2)}{\frac{1}{2} d^2 \pi^2} - 1.0 \right| \quad [76]$$

$$CHECK_R = \left| \frac{ROLL DAMPING * (A_R^2 + B_R^2)}{\frac{1}{2} \pi^2 (d^2 - b^2)} - 1.0 \right| \quad [77]$$

The closer these values are to zero, the better the fit. If any of these accuracies are greater than 2%, the number of terms used to describe p_{2m} and q_{2m} is increased by four for the next frequency calculation. The original number of terms in the p_{2m} and q_{2m} series is 4 and the maximum dimension is 24.

2. Close Fit Method

The close fit technique involves the determination of the two-dimensional hydrodynamic pressure on a section's contour using a method of distributing source singularities over the submerged portion of the hull. Each of the sources has a density which can be determined from the kinematic boundary condition. The hydrodynamic pressures are obtained by substituting the velocity potential, described by these piece-wise sources, into the linearized Bernoulli equation.

$$P^{(m)}(x_i, y_i, \omega_j t) = -\rho \phi_t^{(m)}(x_i, y_i, \omega_j t) \quad [78]$$

or

$$P^{(m)}(x_i, y_i, \omega_j t) = P_a^{(m)}(x_i, y_i, \omega) \cos \omega t + P_v^{(m)}(x_i, y_i, \omega) \sin \omega t \quad [79]$$

Each ship's section is described by $N+1$ offset pairs (z_i, η_i) whose midpoint (x_i, y_i) can be determined from plane geometry.

In order to determine the pressure, the velocity potential $\phi_t^{(m)}$ is defined:

$$\phi^{(m)}(x, y; t) = R_e \int_{C_0} Q(s) G(z, \zeta) e^{-i\omega t} ds \quad [80]$$

or as shown in (7) for point i :

$$\begin{aligned} \phi_i^{(m)} = & \left[\frac{1}{2\pi} \sum_{j=1}^N Q_j R_e \{G_{1ij}\} - \sum_{j=1}^N Q_{N+j} R_e \{G_{2ij}\} \right] \cos \omega t \\ & + \left[\frac{1}{2\pi} \sum_{j=1}^N Q_{N+j} R_e \{G_{1ij}\} + \sum_{j=1}^N Q_j R_e \{G_{2ij}\} \right] \sin \omega t \end{aligned} \quad [81]$$

where Q_j is the density of the pulsating source at point j . G_{ij} is the point potential at i due to point j .

A detailed explanation of the point potential is given in the appendices of (7). The density of the source potential is determined by applying the kinematic boundary condition which can be summarized as follows:

$$\sum_{j=1}^N Q_j^{(m)} I_{ij}^{(m)} + \sum_{j=1}^N Q_{N+j}^{(m)} J_{ij}^{(m)} = 0$$

[82]

$$-\sum_{j=1}^N Q_j^{(m)} J_{ij}^{(m)} + \sum_{j=1}^N Q_{N+j}^{(m)} I_{ij}^{(m)} = \omega A^{(m)} \eta_i^{(m)}$$

where $I_{ij}^{(m)}$ is the influence coefficient in phase with displacement of the i^{th} midpoint due to the j^{th} segment in the m^{th} mode of motion; $J_{ij}^{(m)}$ is the same as $I_{ij}^{(m)}$ but in phase with velocity, $M_i^{(m)}$ is the direction cosine of the normal velocity at i^{th} midpoint for the m^{th} mode of oscillation; $Q_{ij}^{(m)}$ is the source strength in phase with displacement along j^{th} segment for the m^{th} mode of oscillation; $Q_{j+N}^{(m)}$ is the same as $Q_j^{(m)}$ but in phase with velocity; and $A^{(m)}$ is the oscillation of amplitude in the m^{th} mode.

The influence coefficients are defined in Appendix B of (7). Equation [82] can be solved for source density, Q_j , by solving the two simultaneous equations. The solution for the pressures and their added mass and damping is relatively straightforward.

The ship is described in a cartesian coordinate system with the origin at the forward perpendicular at its intersection with the ship's centerline and baseline (see Figure 3.1). The x-axis is positive aft from this point, the y-axis positive to starboard and z-axis positive vertically. Planes parallel to the x-y plane at different heights on the z-axis are referred to as waterplanes, whether they are in the water or not, and are usually symmetric about the ship's centerline. These half-waterplanes are shown graphically in the half breadth plan (Figure 3.2a). Planes that are parallel to the y-z plane at various distances from the forward perpendicular are called transverse sections or stations, and like the waterplanes are symmetric port and starboard. The half stations are shown in the body plan (Figure 3.2b) with the forward half of the ship on the right side and aft half on the left side. The final view, obtained by passing planes parallel to the x-z plane at certain distances from the centerline, gives us a picture of the ship's buttock lines. The sheer plan (Figure 3.2c) illustrates these lines.

III. DESCRIPTION OF INPUT SCHEME

There are three separate data files used in running program STATIC:

- 1) an offset data file
- 2) a weight distribution data file and
- 3) a job control data file.

An offset data file describes the ship geometry by means of coordinate points on the surface of the ship's hull. The weight data, a description of the loading along the length of the ship, determines where the vessel will float (i.e., drafts forward and aft). The job control file directs the execution of the program.

A. Physical Description of the Ship

A.1 Ship Geometry Input

A ship, like any other body, can be shown graphically in three views, the top view, the side view and the end view; or in naval architectural terms, the half breadth plan, the sheer plan and the body plan, respectively.


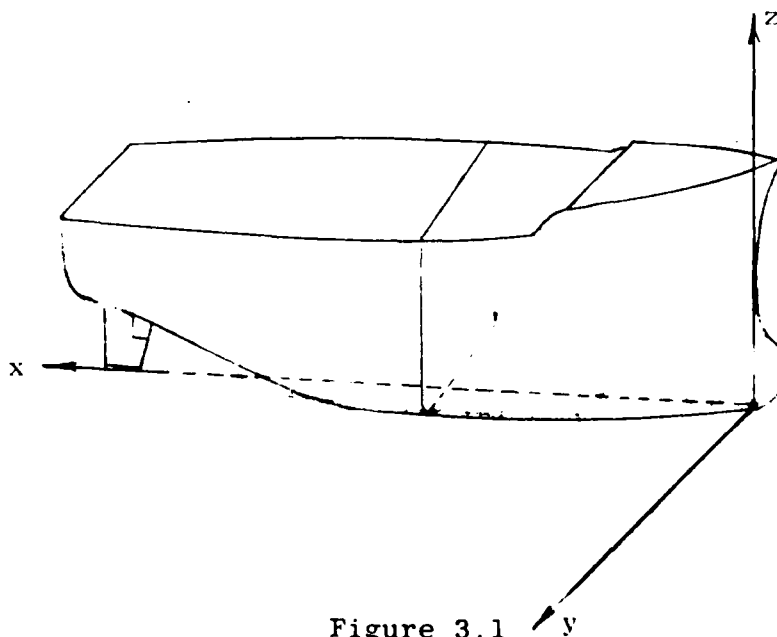


Figure 3.1

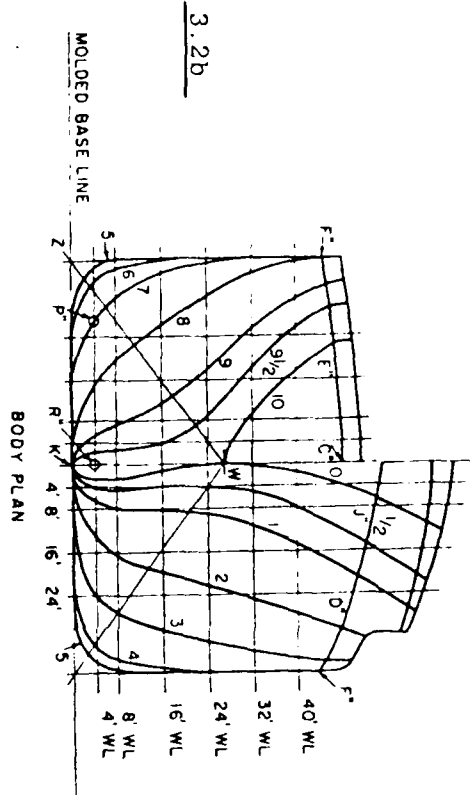

PRINCIPAL DIMENSIONS

LENGTH OVER ALL	563.734
LENGTH BETWEEN PERPENDICULARS	528.0
LENGTH FOR CALCULATIONS	520.0
BREADTH MOLDED	76.0
DEPTH MOLDED TO MAIN DECK AT SIDE (STA 5)	44.6
DRAFT, MOLDED, TO DESIGNED WATERLINE (DWL)	27.0
DRAFT, TO LOAD WATERLINE (LWL)	29.10
DISPLACEMENT, MOLDED, SALT WATER - 27' DWL	18,674 TONS
DISPLACEMENT, LOADED, SALT WATER - 29.10' LWL	21,093 TONS

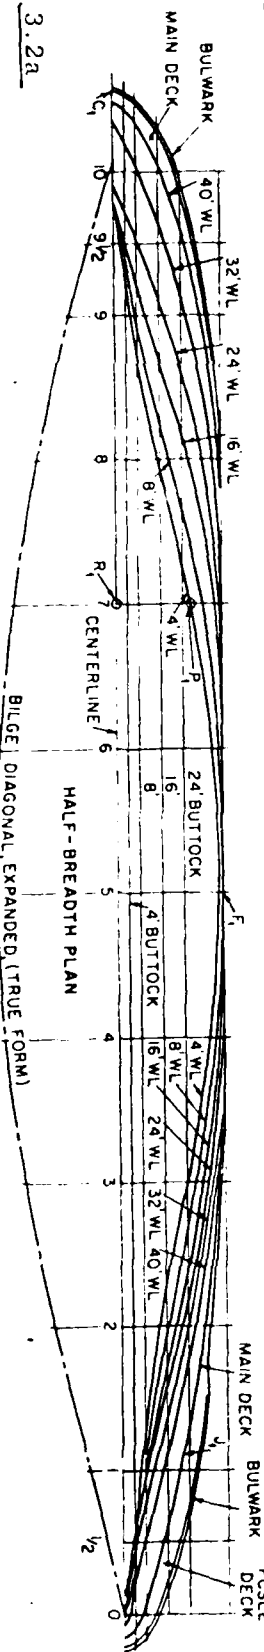
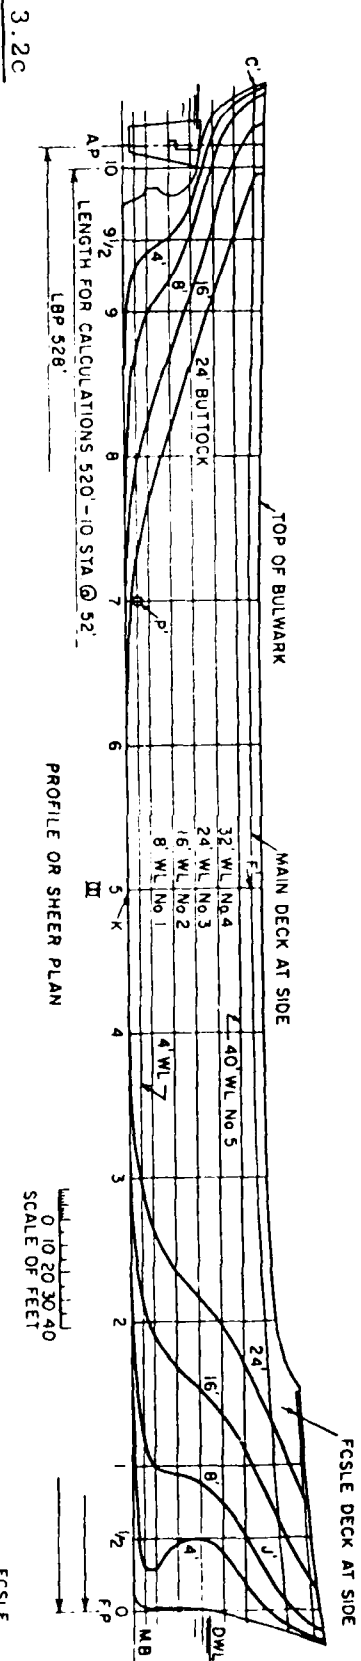


Fig. 1 Lines drawing

Figure 3.2

Taken from (1)

The geometric description used in program STATIC is obtained from the ship's body plan. The input is given for each transverse section commencing with the forward perpendicular and proceeding aft. These sections are given numbers with the forward perpendicular (F.P.) as station 0.0 and aft perpendicular (A.P.) as station 20.0. A length scale of 20 is thus established and all sections are located according to the base dimension of 20. More or less than 21 stations may be used in defining the ship but the total number of stations cannot exceed 41. Stations forward of the F.P. and aft of the A.P. are allowed with stations forward of the F.P. being at a negative distance.

Any station spacing may be used in program STATIC. It is common to have more stations at the ends of the ship due to the rapid change of shape and various appendages. For the hydrodynamic computations there is a limit of 21 stations and it is preferable to have primarily equal station spacing. For this reason the program has a capability to generate a 21 station description at equal distances from any inputted station arrangement.

Each station represents a section (or cylinder) of uniform cross-section. The shape of a section is approximated by a polygon (see Figure 3.3) with corners at the offset points with up to 29 points for each station.

Selection of the offset points requires only one consideration; the points and the straight lines between them should provide a good geometric description of the station shape. Therefore, bow and stern sections typically use twice as many points as a midship section for the same accuracy.

The offsets begin at the intersection of the centerline with the section and proceed to the main deck as shown by points 1 to N in Figure 3.3.

The geometric properties of a station to a given waterline, such as area and centroids, are obtained using a

*Note: When digitizing care should be taken in following this procedure.

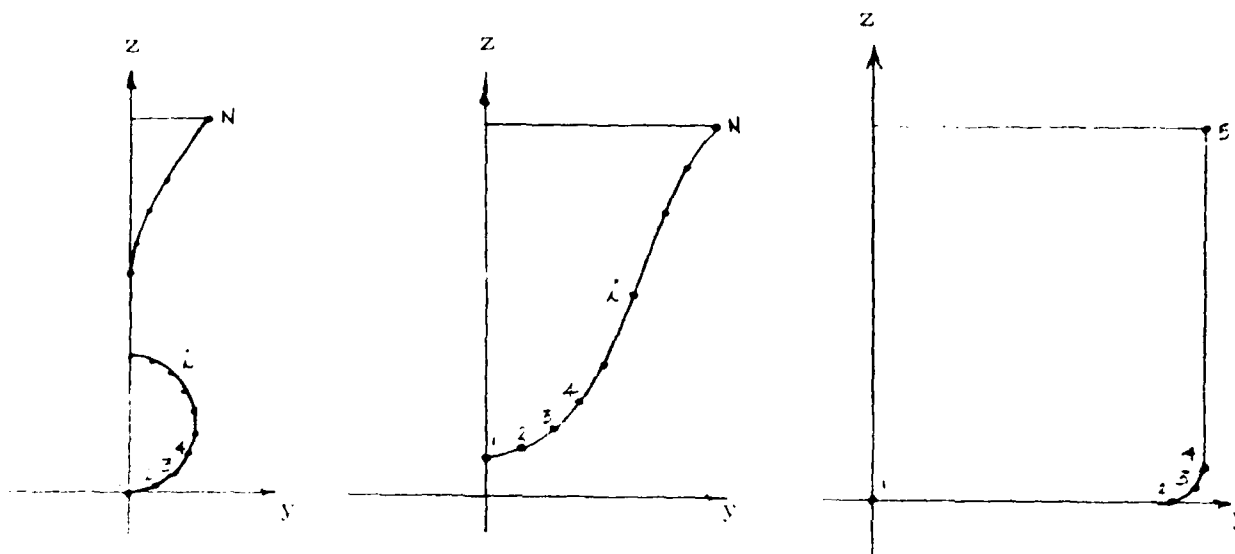


Figure 3.3

linear (i.e., straight line) integration of the offset points.

For the calculation of section added mass and damping for the hydrodynamic calculations, it is preferable to have equi-spaced offset points along the underwater contour. Again, rather than modifying the input offset description, program STATIC has the capability of inserting equi-spaced points (maximum of 21) along the underwater contour of a station. The offset geometry data format will be described in Section C.1.

A.2 Weight Description

The ship will float in a position such that it is in equilibrium, that is, the upward force (buoyancy) is equal and opposite to the downward force (weight).

The buoyancy force is a force caused by the ship displacing fluid and is equal to the product of the underwater volume of the ship and the density of the fluid in which the vessel is floating. The location of this force is given in the ship's coordinate system and has three dimensions:

- 1) distance from the forward perpendicular called the longitudinal center of buoyancy (LCB or XCB)
- 2) the distance above the keel called the vertical center of buoyancy (KB or ZCB) and
- 3) the distance from the ship's centerline called the horizontal center of buoyancy (HCB or YCB).

The center of buoyancy is the centroid of the underwater portion of the ship and is determined by the position of the ship in the water. If we displace a ship downward its displacement will increase and the KB will also increase. If we trim the stern down the LCB will move further aft. Heeling the ship to starboard will cause the HCB to move in that direction.

The weight force and its location must be given so that the ship can adjust itself (sink, trim and heel) so that it is in equilibrium. The location of the weight force is similar to buoyancy force:

- 1) longitudinal center of gravity (LCG or XCG), distance aft of forward perpendicular
- 2) vertical center of gravity (KG or ZCG), distance above the keel and
- 3) horizontal center of gravity (HCG or YCG), distance to the starboard of centerline.

In order to determine how the ship will float the weight, LCG, KG and HCG must be given. The following

describes how each of these may be specified:

(1) WEIGHT

The ship weight can be specified directly or in two alternate ways. The first is to specify the ship's drafts forward and aft which enables the program to calculate the ship's buoyancy and hence due to the principle of equilibrium, its weight. The second is to give a longitudinal weight curve which describes the ship loading with the area under this curve being the ship's weight. This concept will be described later.

(2) LCB

LCB can either be given directly or by two other means. Again, if the drafts forward and aft are given, the ship's longitudinal center of buoyancy (LCB) can be determined. Due to our principle of equilibrium we can determine our LCG from the LCB. The final method of finding the LCG is to determine the centroid of the longitudinal weight curve.

(3) KG must be given.

(4) HCG

HCG can either be given or by specifying the ship's heel. By knowing the ship's heel, the center of buoyancy can be found and therefore the HCG can be determined.

All the different methods of describing the weight and centroid other than the longitudinal weight curve are specified in the control data file which will be described in Section C.3. The weight curve, which is of the standard USCG type, will be described now and the data format in Section C.2.

The weight curve is a graphic representation of the

weight of the ship plotted as tons per foot (or any other desired units) on a vertical scale and the length of the ship on a horizontal scale (see Figure 3.4).

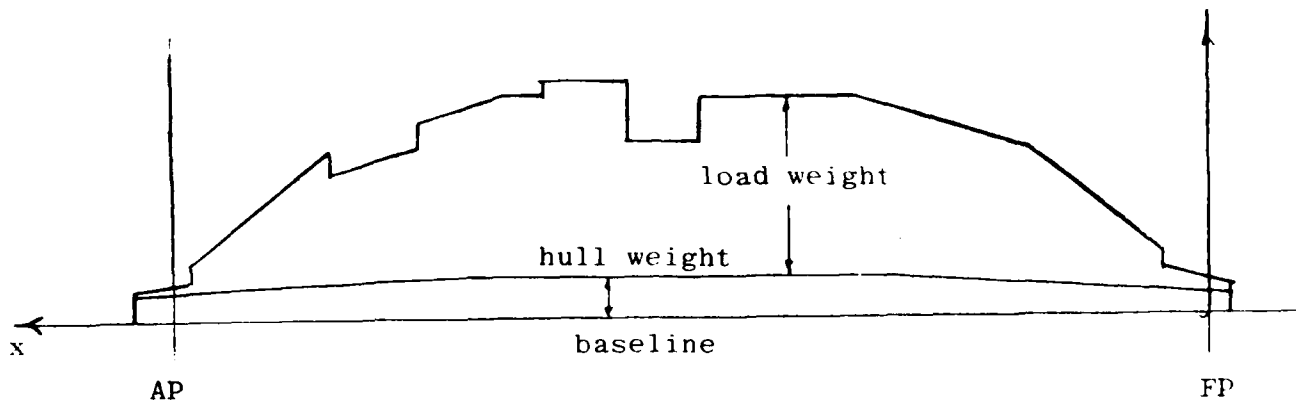


Figure 3.4

As mentioned above, the area under the curve represents the ship's weight and the longitudinal centroid is the LCG. The weight curve is usually calculated for both the light ship and full load conditions.

In order to calculate a weight curve, we generally take all the weights along a specified length of a vessel, usually a hold or station, and calculate the weight and centroid of this part of the ship. Knowing the weight, w , its location, l_{cg} , and the limits of this weight, x_1 and x_2 , we can determine a trapazoidal weight block to represent this load (see Figure 3.5).

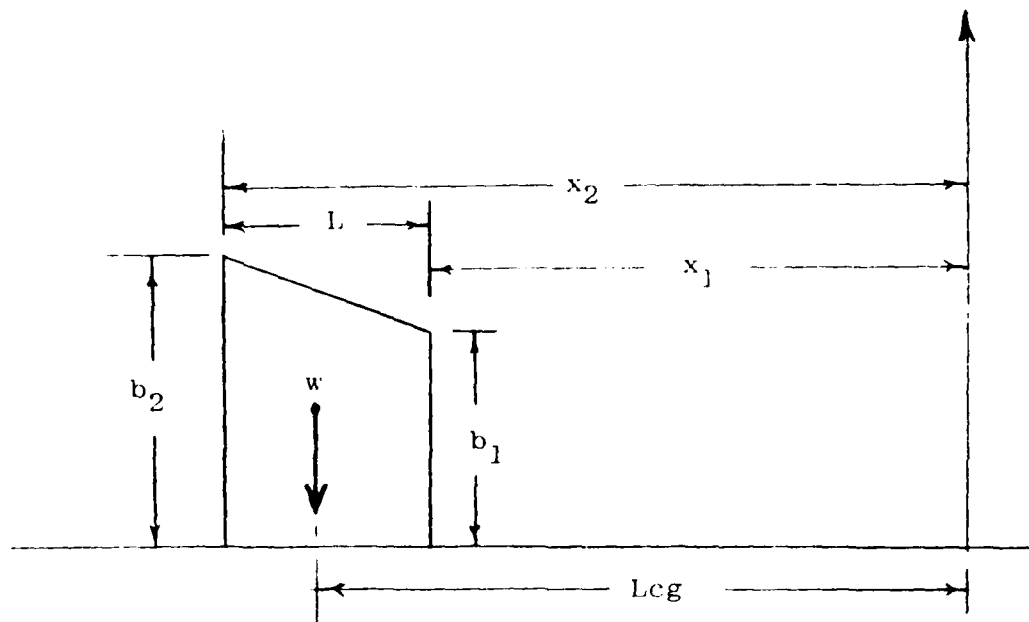


Figure 3.5

From statics it can be seen that

$$b_1 = 2w (2L - 3Lcg) / L^2$$

$$b_2 = 2w (3Lcg - L) / L^2$$

A given hold might have several of these blocks superimposed to give a final weight curve such as that shown in Figure 3.4. The ballast, lightship and cargo weights could be treated separately and the b_1 's and b_2 's added together for the final weight block. The input into program STATIC will be w , Lcg , x_1 and x_2 for various lengths of the ship and categories of load. These will be stored in a data file whose format will be described in Section C.2.

B. Program Control

B.1 Introduction

Practically all programs require some input data. A typical small program may do a short preliminary calculation, read a programmed amount of data, perform some calculation with the data, and terminate with the output of some useful information. A slightly more sophisticated program may read some miscellaneous constants, numerical values describing the lengths of input data tables, flag values that may control the execution of the program or its input and output scheduling, as well as tables of data. Usually these various data items must be furnished by the program user according to some rigid format scheme. The miscellaneous data items such as constants, lengths and control flags are often intermixed with the tables of data. The input setups of many programs become very complicated when the lengths of data tables may be varied, or the order of processing may be changed by control flags in the input deck. Often used constants must be supplied by the user although the program should be able to assume some default value.

The "Program Input and Control SYstem (PICSY)" (17) described here is intended to allow a great deal of flexibility in the execution of a FORTRAN program, while simplifying the input setup.

B.2 Control of Program Execution

Program STATIC consists of eight subprograms, each dealing with a particular step in the overall procedure. Some examples of these steps are: the definition of units whether English or Metric; reading in offset information; hydrostatic calculations; output definition; and so forth. The order in which you call each of these subprograms is flexible to a certain degree. The program control statement* is used to control the program execution.

*Underlining is used to indicated defined terms.

The program control statements form part or all of the input to a program using the PICSY. This control statement consists of a job name and an optional parameter list. The job name directs the main program to execute an associated subprogram. The parameter list is used to input data items and to control subprogram execution. The program control statements are lines (or cards) of Hollerith data (BCD characters) to be read by the program. The first line of data read by the program is usually a program control statement. Other lines of information may be program statements, other data, or a mixture of control statements and data depending on the nature of the program, the subprogram specified by the preceding program control statement and any parameters.

B.3 Syntax of Program Control Statement

The following definitions shall apply for the purpose of describing the structure of the program control statement:

Program control statement: This is alphanumeric data read by the program to allow the user to logically control the program execution. The program control statement may take any of the following forms:

- 1) The character (*) in column 1 of the first line of the statement; followed by a job name; and followed by a terminator.
- 2) The character (*) in column 1 of the first line of the statement; followed by a job name; followed by a separator; followed by a parameter list; followed by a terminator.

Job name: This name requests the main program to call a subprogram for execution. The job name must be one of the job names defined for use by the main program. A list of STATIC job names may be found in Section C.3. Blanks or spaces are ignored.

Parameter list: This is a list of one or more parameters.

A parameter list may be a single parameter, or it may be several parameters separated by separators. The parameter list may not consist of more than 20 parameters.

Parameter: The parameter may take one of two forms: it may be a parameter name, or it may be a parameter name followed by the character (=) followed by a parameter value.

Parameter name: This name is used to control the execution of the subprogram corresponding to the given job name. The parameter name must be one defined for use by the particular subprogram. The list of valid parameters accompanies the description of each subprogram in Section C.3. A parameter name may consist of 1 to 10 alphanumeric characters. Blanks or spaces are ignored.

Parameter value: This value is a character string which may be associated with certain parameter names. The character string is used to input values into the program. Depending on the parameter name, the value may be of several types, viz. a real value, an integer value or alphanumeric value for identification or control purposes. The type of the value depends on the parameter name and job name. The subprogram descriptions specify the type of parameter value to be associated with each parameter name. A parameter value may consist of 1 to 20 alphanumeric characters. Blanks or spaces are being ignored.

Alphanumeric value: This is a parameter value used by the program for identification purposes or a data file name. It may consist of 1 to 20 alphanumeric characters. Here "alphanumeric" characters refers to the BCD characters in use within the particular computer operating system. They are the alphabetic

characters A through Z, the numeric characters 0 and 1 through 9 and the set of punctuation and mathematical characters understood by the system.

Real value: This is a parameter value to be converted by the program into a REAL number. It must follow the syntax for FORTRAN real constants or FORTRAN integer constants. It is represented by a string of digits (numeric characters), preceded optionally by a sign character (+ or -); it may contain a decimal point; and it may be followed by an "exponent representation" indicating a power of 10. The "exponent representation" consists of the character (E) followed optionally by a (+) or a (-) followed by digits indicating the power of 10. The parameter value syntax limits the number of non-blank characters to 20.

Integer value: This is a parameter value to be converted by the program into an INTEGER number. The syntax is the same as for a real value.

Separator: This is a character used to separate the job name from the parameter list and to separate parameters within the parameter list. A separator is either the character (,) or the character (().

Terminator: This is a character used to indicate the logical end of a program control statement. The character (()) will always terminate the statement. The character (.) will terminate the program control statement if it occurs following a job name, a parameter name or a separator. The character (.) is not a terminator if it occurs following a parameter value. (In the last case the (.) is considered part of the parameter value).

A few additional remarks regarding the physical structure of the program control statement are in order at this point. The program reads the program control statement components from column 1 through 80 of each line. The job name must be completed on the first line of the control statement. The parameter list may be continued on more than one line, but the terminator must appear on or before the fifth line of the statement. Any characters following the terminator, and on the same line as the terminator, will be ignored.

Some examples of the program control statement follow.

Parameter List

The diagram illustrates the structure of program control statements with the following examples and annotations:

- *OFFSETS (FILE = MMTSL7)**:
 - job name**: *OFFSETS
 - parameter name**: FILE
 - separator**: =
 - parameter value**: MMTSL7
 - terminator**:)
- *DRAFT (TF = 20.03, TA = 22.7)**:
 - job name**: *DRAFT
 - parameter list**: (TF = 20.03, TA = 22.7)
 - parameter names**: TF, TA
 - parameter value**: 20.03, 22.7
 - terminator**:)
- *GROUNDING (SHOAL LENGTH = 10.0, SHOAL DEPTH = 5.0)**:
 - job name**: *GROUNDING
 - parameter list**: (SHOAL LENGTH = 10.0, SHOAL DEPTH = 5.0)
 - parameter names**: SHOAL LENGTH, SHOAL DEPTH
 - parameter value**: 10.0, 5.0
 - terminator**:)
- *UNITS (RHO = 1.9905, FORCE = LB)**:
 - job name**: *UNITS
 - parameter list**: (RHO = 1.9905, FORCE = LB)
 - parameter names**: RHO, FORCE
 - parameter value**: 1.9905, LB
 - terminator**:)
- *UNITS .**:
 - job name**: *UNITS
 - terminator**: .

The complete lists of job names, parameter names and parameter values will be given in Section C.3.

C. Data Card or Data File Input Description

C.1 Offset Data File

The offset data file is a geometric description of the ship following the SHCP "cook book" format. This information will be loaded into the computer core and stored as a file with a seven letter descriptive name. The convention that has been established requires that the first three letters of the file name be "MMT" with the remaining four letters being the users choice. A description of the card (or line) format for this file is given below.

1) TITLE CARD

<u>Columns</u>	<u>Format</u>	<u>Entry</u>
1-40	A	Any alphanumeric title information used to label job output, such as ship name

2) LENGTH CARD

<u>Columns</u>	<u>Format</u>	<u>Entry</u>
1-10	Real	Station or frame spacing in length units (feet, inches, meters, etc.)
11-20	Real	Vertical scale. If the offsets are in the desired units, vertical scale should be set equal to 0.005. If offsets are lifted from a body plan via Telecorder, submit scale factors as the scale of the drawing in inches per foot, adjusted for distortion as required. For example, if scale of drawing is 1/4 inch per foot, submit 0.25 for vertical scale.
21-30	Real	Horizontal scale. Same definition as vertical scale but for horizontal direction.
31-40	Real	Ship's length between perpendiculars.
41-50	Real	Scale to be used in plotting of body plan (this is not used in program STATIC).

3) OFFSET CARDS

<u>Columns</u>	<u>Format</u>	<u>Entry</u>
1-6	Real	Station distance (or number) from the FP as described below. Stations should be carefully selected to give an accurate representation of the hull form. Neither evenly-spaced stations nor integer station numbers are required.
7-13	Real	Half beam measured from the vessel's centerline for a given offset point.
14-20	Real	Waterline height, measured from the vessel's baseline for a given offset point.
21-26	Integer	Control integer which signifies end of station or end of ship. If: +88888 , this represents last point for station If: +99999, this represents last point of last station on ship (or end of data).

Card 3 is repeated for every offset point and every station.

The station spacing is multiplied by the station number on card 3 to obtain each station's distance from the FP. As long as this product gives the distance from the FP, the data may be any representation of the station's location. The following are valid combinations:

Card 2, Cols. 1-10

- a. frame spacing
- b. 1.0
- c. LBP (feet)
- d. station spacing

Card 3, Cols. 1-6

- a. frame number
- b. distance from FP (feet)
- c. %LBP
- d. station number

The following rules apply to station selection, (Columns 1-6, Card 3):

- a. A minimum of three and a maximum of forty-one stations can be specified.
- b. Each station must have a non-zero sectional area when entirely immersed.

- c. The sequence of stations submitted must be from the bow aft. The tip of the bow and the stern should be included to define overall ship length (LOA). Since station distance from the FP is obtained by multiplying station number by station spacing, a station forward of the FP will have a negative number.
- d. The minimum station must have a half-breadth of at least .01 feet, and an incremental height of at least .01 feet.
- e. Regions of rapid change in station size or shape require many closely spaced stations (e.g., half and/or quarter stations should be submitted near the bow and stern).
- f. Longitudinal breakpoints (end of raised forecastle, end of skeg, etc.) are represented by closely spaced stations. Do not confuse a station's position in the input sequence with its station number.
- g. Only two stations need be specified for the parallel midbody.

The following rules must be observed for points on each station (columns 7-13 and 14-20 on card 3):

- a) A minimum of two points and a maximum of twenty-nine points per station can be processed.
- b) The points on each station must be submitted in a specific order. The first offset point is at the intersection of the station and the centerline, and the last point is the deck and can be at either the side or centerline.
- c) The station is represented as a polygon. Therefore straight lines between two adjacent offset points should describe the section fairly accurately. There will be more points in areas of rapid curvature. Two points are required to describe a straight line, one at the beginning of the segment and one at the end.

An example of an offset file using the SL-7 follows.

PAGE 1 07/05/79. 11.32.14. MMTSL7

SEA-LAND 7 CONTAINERSHIP

44.0250	0.0050	0.0050	880.5000	0.2500
0.	0.	0.		
0.	3.0349	.8202		
0.	4.4801	1.6404		
0.	6.0699	3.2808		
0.	6.6479	4.9213		
0.	7.0237	6.5617		
0.	7.0815	8.2021		
0.	6.7347	9.8425		
0.	6.2144	11.4829		
0.	5.4918	13.1234		
0.	3.8153	16.4042		
0.	2.3412	19.6850		
0.	1.1562	22.9659		
0.	.2890	26.2467		
0.	0.	29.5276		
0.	0.	32.8084		
0.	1.0116	39.3701		
0.	2.5147	45.9318		
0.	4.2778	52.4934		
0.	6.2722	59.0551		
0.	8.2377	65.1247+88888		
.250	0.	0.		
.250	3.1795	.8202		
.250	4.6247	1.6404		
.250	6.2144	3.2808		
.250	6.9948	4.9213		
.250	7.2260	6.5617		
.250	7.2260	8.2021		
.250	6.9948	9.8425		
.250	6.5901	11.4829		
.250	5.8386	13.1234		
.250	4.2778	16.4042		
.250	2.8904	19.6850		
.250	1.7921	22.9659		
.250	1.1562	26.2467		
.250	.8671	29.5276		
.250	1.0984	32.8084		
.250	2.0233	39.3701		
.250	3.6130	45.9318		
.250	5.8386	52.4934		
.250	8.3822	59.0551		
.250	10.8968	65.0262+88888		
.500	0.	0.		
.500	3.3240	.8202		
.500	4.7692	1.6404		
.500	6.3589	3.2808		
.500	7.0815	4.9213		
.500	7.5151	6.5617		

Note:

Offsets were updated September 1980
to correct data point.

PAGE 2 07/05/79. 11.32.14. MMTSL7

.500 7.5729 8.2021
.500 7.2838 9.8425
.500 6.9370 11.4829
.500 6.3011 13.1234
.500 4.6536 16.4042
.500 3.3240 19.6850
.500 2.2834 22.9659
.500 1.5319 26.2467
.500 1.3007 29.5276
.500 1.5030 32.8084
.500 2.8615 39.3701
.500 4.9715 45.9318
.500 7.7174 52.4934
.500 10.6078 59.0551
.500 13.3537 64.9934 +88888
1.000 0. 0.
1.000 3.7575 .8202
1.000 5.2027 1.6404
1.000 6.8792 3.2808
1.000 7.6596 4.9213
1.000 8.1510 6.5617
1.000 8.2377 8.2021
1.000 8.0932 9.8425
1.000 7.8041 11.4829
1.000 7.2260 13.1234
1.000 5.8386 16.4042
1.000 4.3356 19.6850
1.000 3.1795 22.9659
1.000 2.6014 26.2467
1.000 2.5436 29.5276
1.000 3.0349 32.8084
1.000 5.0582 39.3701
1.000 7.8619 45.9318
1.000 11.2726 52.4934
1.000 14.8856 59.0551
1.000 18.0073 64.9606 +88888
1.500 0. 0.
1.500 4.1911 .8202
1.500 5.5785 1.6404
1.500 7.3995 3.2808
1.500 8.5267 4.9213
1.500 8.6712 6.5617
1.500 8.9025 8.2021
1.500 8.8158 9.8425
1.500 8.5267 11.4829
1.500 8.0932 13.1234
1.500 6.6479 16.4042
1.500 5.3473 19.6850
1.500 4.3934 22.9659
1.500 4.1333 26.2467

PAGE 3 07/05/79. 11.32.14. MMTSL7

1.500 4.335629.5276
1.500 5.000432.8084
1.500 7.601839.3701
1.50010.983645.9318
1.50011.908552.4934
1.50018.787759.0551
1.50022.545264.8950+88888
2.000 0. 0.
2.000 4.6247 .8202
2.000 6.1277 1.6404
2.000 8.0353 3.2808
2.000 9.1626 4.9213
2.000 9.4805 6.5617
2.000 9.7696 8.2021
2.000 9.6829 9.8425
2.000 9.336011.4829
2.000 8.960313.1234
2.000 7.948616.4042
2.000 6.937019.6850
2.000 6.214422.9659
2.000 6.214426.2467
2.000 6.879229.5276
2.000 8.006432.8084
2.00010.925839.3701
2.00014.452145.9318
2.00018.267452.4934
2.00023.065559.0551
2.00027.112164.7966+88888
2.500 0. 0.
2.500 5.1449 .8202
2.500 6.8792 1.6404
2.500 8.4689 3.2808
2.500 9.3938 4.9213
2.500 9.8274 6.5617
2.50010.2610 8.2021
2.50010.4055 9.8425
2.50010.203211.4829
2.50010.058613.1234
2.500 9.393816.4042
2.500 8.757919.6850
2.500 8.613422.9659
2.500 9.018126.2467
2.500 9.827429.5276
2.50011.041432.8084
2.50014.452139.3701
2.50018.267445.9318
2.50022.545252.4934
2.50027.112159.0551
2.50031.303264.6982+88888
3.000 0. 0.

PAGE 4 07/05/79. 11.32.14. MMTSL7

3.000 2.8904 .0656
3.000 5.9253 .8202
3.000 7.2260 1.6404
3.000 8.9603 3.2808
3.00010.0586 4.9213
3.00010.6656 6.5617
3.00010.7523 8.2021
3.00011.2726 9.8425
3.00011.330411.4829
3.00011.272613.1234
3.00011.128116.4042
3.00011.041419.6850
3.00011.330422.9659
3.00012.139726.2467
3.00013.151429.5276
3.00014.596632.8084
3.00018.094039.3701
3.00022.111645.9318
3.00026.302752.4934
3.00030.927459.0551
3.00034.974064.6325+88888
4.000 0. 0.
4.000 4.3356 .1312
4.000 6.9370 .8202
4.000 8.7579 1.6404
4.00010.6945 3.2808
4.00011.9085 4.9213
4.00012.8623 6.5617
4.00013.5849 8.2021
4.00014.3075 9.8425
4.00014.741111.4829
4.00015.319213.1234
4.00016.330816.4042
4.00017.342519.6850
4.00018.354122.9659
4.00019.741526.2467
4.00021.042229.5276
4.00022.487432.8084
4.00025.782539.3701
4.00029.482245.9318
4.00033.528852.4934
4.00037.864459.0551
4.00041.911064.5341+88888
5.000 0. 0.
5.000 4.3356 .1969
5.000 8.9603 .8202
5.00010.8390 1.6404
5.00013.2959 3.2808
5.00015.3192 4.9213
5.00016.9667 6.5617

5.00018.1518 8.2021
 5.00019.3658 9.8425
 5.00020.232911.4829
 5.00021.157813.1234
 5.00023.036616.4042
 5.00024.568519.6850
 5.00026.013722.9659
 5.00027.458926.2467
 5.00028.904129.5276
 5.00030.349332.8084
 5.00033.297539.3701
 5.00036.708245.9318
 5.00040.118952.4934
 5.00043.789759.0551
 5.00046.969264.3701+88888
 6.000 0. 0.
 6.000 7.2260 .2625
 6.00012.2842 .8202
 6.00014.7411 1.6404
 6.00018.2096 3.2808
 6.00020.6664 4.9213
 6.00022.7764 6.5617
 6.00024.2795 8.2021
 6.00025.6668 9.8425
 6.00026.736311.4829
 6.00027.892513.1234
 6.00030.002516.4042
 6.00031.794519.6850
 6.00033.297522.9659
 6.00034.829526.2467
 6.00036.187929.5276
 6.00037.633232.8084
 6.00040.176739.3701
 6.00042.720345.9318
 6.00045.379552.4934
 6.00045.183259.0551
 6.00050.351064.3373+88888
 7.000 0. 0.
 7.00011.5616 .3281
 7.00017.1979 .8202
 7.00020.2329 1.6404
 7.00024.4240 3.2808
 7.00027.0253 4.9213
 7.00029.3377 6.5617
 7.00031.2164 8.2021
 7.00032.8062 9.8425
 7.00034.106811.4829
 7.00035.465313.1234
 7.00037.488616.4042
 7.00039.136219.6850

PAGE 6 07/05/79. 11.32.14. MMTSL7

7.00040.407922.9659
7.00041.621926.2467
7.00042.720329.5276
7.00043.789732.8084
7.00045.697439.3701
7.00047.605145.9318
7.00049.223752.4934
7.00050.871259.0551
7.00052.027464.3045+88888
8.000 0. 0.
8.00019.3658 .3937
8.00023.4123 .8202
8.00027.3144 1.6404
8.00031.5055 3.2808
8.00033.9623 4.9213
8.00036.5637 6.5617
8.00038.2979 8.2021
8.00039.8877 9.8425
8.00041.043811.4829
8.00042.142213.1234
8.00043.934216.4042
8.00045.234919.6850
8.00046.246622.9659
8.00047.171526.2467
8.00047.836329.5276
8.00048.558932.8084
8.00049.715139.3701
8.00050.640045.9318
8.00051.564952.4934
8.00052.258659.0551
8.00052.547764.3045+88888
9.000 0. 0.
9.00026.3027 .5906
9.00030.0603 .8202
9.00033.9623 1.6404
9.00038.2979 3.2808
9.00040.6103 4.9213
9.00042.7781 6.5617
9.00044.3100 8.2021
9.00045.5240 9.8425
9.00046.477811.4829
9.00047.344913.1234
9.00048.703416.4042
9.00049.715119.6850
9.00050.351022.9659
9.00050.929026.2467
9.00051.304829.5276
9.00051.593832.8084
9.00052.027439.3701
9.00052.374245.9318

PAGE 7 07/05/79. 11.32.14. MMTSL7

9.00052.605552.4934
9.00052.750059.0551
9.00052.750064.3045+88888
10.000 0. 0.
10.00032.6616 .6562
10.00034.6849 .8202
10.00039.3096 1.6404
10.00043.2116 3.2808
10.00045.3795 4.9213
10.00047.1137 6.5617
10.00048.5589 8.2021
10.00049.5705 9.8425
10.00050.293211.4829
10.00050.957913.1234
10.00051.911816.4042
10.00052.374219.6850
10.00052.605522.9659
10.00052.663326.2467
10.00052.721129.5276
10.00052.750032.8084
10.00052.750064.3045+88888
11.000 0. 0.
11.00032.7514 .6562
11.00035.6497 .8202
11.00040.8668 1.6404
11.00044.6346 3.2808
11.00046.9533 4.9213
11.00048.6923 6.5617
11.00049.9096 8.2021
11.00050.7212 9.8425
11.00051.445711.4829
11.00052.025413.1234
11.00052.518116.4042
11.00052.750019.6850
11.00052.750022.9659
11.00052.750068.2415+88888
12.000 0. 0.
12.00032.7514 .6562
12.00033.9107 .8202
12.00038.5481 1.6404
12.00042.7507 3.2808
12.00045.3592 4.9213
12.00047.1852 6.5617
12.00048.6923 8.2021
12.00049.6488 9.8425
12.00050.489311.4829
12.00051.213913.1234
12.00052.083416.4042
12.00052.605119.6850
12.00052.750022.9659

PAGE 8 07/05/79. 11.32.14. MMTSL7

12.00052.750068.2415+88888
13.000 0. 0.
13.00024.6360 .4921
13.00028.6937 .8202
13.00033.6209 1.6404
13.00038.5481 3.2808
13.00041.5044 4.9213
13.00043.9100 6.5617
13.00045.7940 8.2021
13.00047.2431 9.8425
13.00048.5474 11.4829
13.00049.5618 13.1234
13.00051.0110 16.4042
13.00051.8805 19.6850
13.00052.4022 22.9659
13.00052.6920 26.2467
13.00052.7500 29.5276
13.00052.750068.2415+88888
14.000 0. 0.
14.00015.9409 .3281
14.00020.8681 .8202
14.00026.0852 1.6404
14.00031.5920 3.2808
14.00035.5048 4.9213
14.00038.5481 6.5617
14.00041.0696 8.2021
14.00042.9536 9.8425
14.00044.7795 11.4829
14.00046.1418 13.1234
14.00048.5474 16.4042
14.00050.1415 19.6850
14.00051.2429 22.9659
14.00051.9385 26.2467
14.00052.4602 29.5276
14.00052.7500 32.8084
14.00052.750068.2415+88888
15.000 0. 0.
15.000 3.1882 0.
15.00011.5934 .8202
15.00016.0279 1.6404
15.00022.3173 3.2808
15.00024.2012 4.9213
15.00031.3022 6.5617
15.00034.2295 8.2021
15.00036.8670 9.8425
15.00039.0408 11.4829
15.00040.9247 13.1234
15.00044.1129 16.4042
15.00046.6345 19.6850
15.00048.4025 22.9659

PAGE 9 07/05/79. 11.32.14. MMTSL7

15.00049.706726.2467
15.00050.750129.5276
15.00051.619632.8084
15.00052.199339.3701
15.00052.750045.9318
15.00052.750052.4934
15.00052.750068.2415+88888
16.000 0. 0.
16.000 2.8114 0.
16.000 4.8982 .8202
16.000 8.2023 1.6404
16.00013.1875 3.2808
16.00017.2452 4.9213
16.00021.3898 6.5617
16.00024.6940 8.2021
16.00028.0850 9.8425
16.00030.664611.4829
16.00033.215113.1234
16.00037.040916.4042
16.00040.229119.6850
16.00042.605822.9659
16.00044.663626.2467
16.00046.373629.5276
16.00047.764832.8084
16.00049.851639.3701
16.00051.387845.9318
16.00052.605152.4934
16.00052.750068.2415+88888
17.000 0. 0.
17.000 2.4636 0.
17.000 3.2462 .8202
17.000 4.2896 1.6404
17.000 6.7242 3.2808
17.000 9.4196 4.9213
17.00012.3760 6.5617
17.00014.9845 8.2021
17.00017.9698 9.8425
17.00020.288511.4829
17.00022.781013.1234
17.00027.099616.4042
17.00030.925419.6850
17.00034.200522.9659
17.00037.098926.2467
17.00039.562529.5276
17.00041.823232.8084
17.00045.504139.3701
17.00048.692345.9318
17.00051.300852.4934
17.00052.025454.6260
17.00052.025468.2415+88888

PAGE 10 07/05/79. 11.32.14. MMTSL7

17.500 0. 0.
17.500 2.1738 0.
17.500 2.6085 .8202
17.500 3.1882 1.6404
17.500 4.6374 3.2808
17.500 6.5213 4.9213
17.500 8.8400 6.5617
17.50010.8688 8.2021
17.50013.2745 9.8425
17.50015.245311.4829
17.50017.622013.1234
17.50021.766616.4042
17.50025.592419.6850
17.50028.983522.9659
17.50032.287626.2467
17.50035.128029.5276
17.50037.678632.8084
17.50042.171039.3701
17.50045.504145.9318
17.50048.692352.4934
17.50051.358854.6260
17.50052.083468.4055+88888
18.000 0. 0.
18.000 2.0288 0.
18.000 2.1738 .8202
18.000 2.5216 1.6404
18.000 3.3331 3.2808
18.000 4.3475 4.9213
18.000 5.7967 6.5617
18.000 7.2749 8.2021
18.000 9.0139 9.8425
18.00010.665911.4829
18.00012.549913.1234
18.00016.694516.4042
18.00019.824719.6850
18.00023.476622.9659
18.00026.809826.2467
18.00030.258829.5276
18.00030.374732.8084
18.00038.432139.3701
18.00042.924645.9318
18.00047.069252.4934
18.00048.344554.6260
18.00048.344568.4383+88888
18.500 0. 0.
18.500 1.5941 0.
18.500 1.7390 .8202
18.500 1.9709 1.6404
18.500 2.5216 3.2808
18.500 3.1302 4.9213

PAGE 11 07/05/79. 11.32.14. MMTSL7

18.500 3.9997 6.5617
18.500 4.7823 8.2021
18.500 5.8837 9.8425
18.500 6.9560 11.4829
18.500 8.2893 13.1234
18.500 11.1587 16.4042
18.500 14.3179 19.6850
18.500 17.5350 22.9659
18.500 21.0130 26.2467
18.500 24.4911 29.5276
18.500 28.0271 32.8084
18.500 33.9107 39.3701
18.500 39.2727 45.9318
18.500 44.0549 52.4934
18.500 45.3012 54.6260
18.500 45.3012 68.5367 +88888
19.000 0. 11.0236
19.000 3.0723 11.0236
19.000 3.6229 11.4829
19.000 4.4924 13.1234
19.000 6.3764 16.4042
19.000 8.8400 19.6850
19.000 11.5354 22.9659
19.000 14.9555 26.2467
19.000 18.5495 29.5276
19.000 22.3173 32.8084
19.000 29.0415 39.3701
19.000 34.7802 45.9318
19.000 36.6931 52.4934
19.000 41.4754 54.6260
19.000 41.4754 68.6352 +88888
19.500 0. 16.4042
19.500 2.7534 16.4042
19.500 3.7389 19.6850
19.500 5.5069 22.9659
19.500 8.4632 26.2467
19.500 12.0282 29.5276
19.500 16.1728 32.8084
19.500 23.7665 39.3701
19.500 29.9979 45.9318
19.500 35.4468 52.4634
19.500 37.0989 54.6260
19.500 37.0989 68.8976 +88888
19.750 0. 22.9659
19.750 2.7534 22.9659
19.750 5.5069 26.2467
19.750 8.8979 29.5276
19.750 12.9556 32.8084
19.750 20.6073 39.3701
19.750 27.3025 45.9318

PAGE 12 07/05/79. 11.32.14. MMTSL7

19.75033.012252.4934
19.75034.780254.6260
19.75034.780268.8976+88888
20.000 0. 26.2467
20.000 2.057826.2467
20.000 5.651829.5276
20.000 9.390732.8084
20.00017.390139.3701
20.00024.346245.9318
20.00030.374752.4934
20.00032.084854.6260
20.00032.084868.8976+88888
20.500 0. 30.5118
20.500 2.840432.8084
20.50010.810939.3701
20.50018.114745.9318
20.50024.780952.4934
20.50026.664854.6260
20.50026.664868.8976+99999

C.2 Weight Data File

The weight data file is the input weight description of the vessel following a standard format used by the U.S.C.G. This information is loaded into the computer core and stored as a file with a seven letter descriptive name. The convention which has been established requires that the first two letters of the file name be "DW" with the remaining five letters being a description of the vessel and condition.

The weight curve may be described by an unlimited number (500) of weight "segments". These segments are defined by their associated weight, the fore and aft limits between which this weight acts (measured from the F.P.) and the center of gravity of the weight, also measured from the F.P. The position of the center of gravity of the segment (LCG) is constrained in that it must fall within the middle one-third of the segment (i.e., the weight distribution of each segment must be linear).

Segments may be submitted in any order. If desired, an integer code may be specified with each segment. The purpose of the code is to allow the submitted segments to be sorted on the basis of the code, followed by a computation of the total weight and associated LCG of all segments of the same code. Up to 10 different integer codes are permitted ("0" is not a possible I.D.) allowing the user to specify 10 separate weight classes for examination. A description of the card (or line) format for this file is given below.

1) WEIGHT CLASS CARD

<u>Column</u>	<u>Format</u>	<u>Entry</u>
5	Integer	Always a 2. Not used in present program.

2) LENGTH CARD

<u>Columns</u>	<u>Format</u>	<u>Entry</u>
1-10	Real	Ship's length between perpendiculars in length units.
11-15	Integer	Number of weight blocks for output weight curve (21 is used for ship motion program)

The data from cards 1 and 2 are not used in program STATIC but are used in other U.S.C.G. programs but must be included so that data files between programs can be used interchangeably.

3) WEIGHT CARDS (refer to figure 3.5, page 30 for definition of symbols)

<u>Columns</u>	<u>Format</u>	<u>Entry</u>
1-10	Real	Forward end of weight segment measured from the forward perpendicular (F.P.) _{1x} .
11-20	Real	The weight of this segment in force units (i.e., L. tons, pounds, etc.) _{1w} .
21-30	Real	Aft end of weight segment measured from the F.P. _{1x2} .
31-40	Real	Center of gravity of the weight segment measured from the F.P., Lcg.
41-43	Integer	Integer code to specify different weight classes (i.e., lightship and deadweight could be two weight classes). These codes are used to subtotal weight classes.

If the forward end of the weight segment (columns 1-10) is greater than or equal to 999999. the reading of this file is terminated.

Examples of weight data files for the SL-7 full load, SL-7 light load and a 290 ft. by 52.5 ft. box barge are given:

Data file "DW428FU" - weight curve for 290 ft. by 52.5 ft. barge

2				
290.	21			
.01	147.4	60.	30.	1
60.	55.9	82.75	71.4	1
82.75	132.56	136.75	109.75	1
136.75	127.04	188.5	162.6	1
188.5	127.04	240.25	214.4	1
240.25	122.6	290.00	265.13	1
8.0	622.5	68.	38.	2
68.	764.8	128.	98.	2
128.	758.8	188.	158.	2
188.	609.8	248.	218.	2
248.	295.8	282.	265.	2
9999999.				
-1				

Data file "DWSL7FU" - Full load weight curve for SL-7 from (18)

```

      2
880.5000    22
-20.0000    765.2000    42.0000    19.0000    1
  42.0000    1847.7000    115.2500    84.3200    1
  115.2500    1205.7000    167.7500    143.1800    1
  167.7500    1613.4000    207.7500    185.5200    1
  207.7500    1943.6000    247.7500    225.5000    1
  247.7500    2379.2000    287.7500    265.5400    1
  287.7500    2305.6000    327.7500    305.5300    1
  327.7500    2610.8000    367.7500    345.5300    1
  367.7500    3148.7000    407.7500    385.5200    1
  407.7500    3343.7000    447.7500    425.5100    1
  447.7500    3299.0000    492.7500    467.9900    1
  492.7500    3179.2000    537.7500    512.9900    1
  537.7500    3293.3000    562.7500    550.0000    1
  562.7500    3039.8000    612.7500    587.5000    1
  612.7500    2661.3000    652.7500    635.0000    1
  652.7500    2898.7000    697.7500    674.3500    1
  697.7500    2116.1000    737.7500    716.1000    1
  737.7500    1678.3000    777.7500    756.4000    1
  777.7500    1597.2000    817.7500    795.5500    1
  817.7500    1244.5000    852.5000    835.5000    1
  852.5000    897.7000    880.5000    869.5000    1
  880.5000    691.3000    920.5000    900.5000    1
9999999.

```

Data file "DWSL7BA" - Ballast weight curve for SL-7

```

      2
880.5000    22
-20.0000    777.4000    42.0000    19.0000    1
  42.0000    1859.9000    115.2500    84.3200    1
  115.2500    1217.9000    167.7500    143.1800    1
  167.7500    1151.8000    207.7500    185.5200    1
  207.7500    1379.2000    247.7500    225.5000    1
  247.7500    1844.3000    287.7500    265.5400    1
  287.7500    1990.6000    327.7500    305.5300    1
  327.7500    2429.0000    367.7500    345.5300    1
  367.7500    2547.5000    407.7500    385.5200    1
  407.7500    2707.6000    447.7500    425.5100    1
  447.7500    2714.9000    492.7500    467.9900    1
  492.7500    2697.9000    537.7500    512.9900    1
  537.7500    3284.9000    562.7500    550.0000    1
  562.7500    3031.4000    612.7500    587.5000    1
  612.7500    2726.3000    652.7500    635.0000    1
  652.7500    2757.4000    697.7500    674.3500    1
  697.7500    1631.3000    737.7500    716.1000    1
  737.7500    1217.7000    777.7500    756.4000    1
  777.7500    982.5000    817.7500    795.5500    1
  817.7500    901.2000    852.5000    835.5000    1
  852.5000    889.3000    880.5000    869.5000    1
  880.5000    682.9000    920.5000    900.5000    1
9999999.0

```

C.3 Data Input

Program STATIC has eight operational jobs as follows:

<u>Job Name and Subprogram Name</u>	
---	--

*TERMINAL	TERMINAL sets the type of terminal used for output and the maximum line length for this output device.
*UNITS	UNITS sets the physical units of length, force, and time. The mass density & viscosity of water and acceleration of gravity may also be changed.
*OFFSETS	OFFSETS reads the ship's geometric description from a file that is described in Section C.1
*DRAFT	DRAFT is one of the main subprograms. It calculates the vessel's equilibrium position and hydrostatic properties associated with it. Bending moments and shear forces are also calculated. Data preparation for both the "Springing" and "Ship Motion" programs.
*GROUNDING	GROUNDING is a specialized subprogram that calculates the drafts and bending moments and shear forces associated with a grounded vessel.
*INTACT STABILITY	INTACT STABILITY calculates the cross curves of stability for the vessel.
*COEFFICIENTS	This subprogram calculates the two-dimensional added mass and damping for vertical and lateral motions, using either the conformal mapping technique or Frank close fit method.
*FINISH	This command will STOP program execution.

The order of execution of these subprograms is logical. Generally, TERMINAL and UNITS are the first two called if there is to be a change in the assumed default values of these subprograms. Next OFFSETS must be called to obtain the geometric description of the vessel. Subprograms DRAFT, GROUNDING, and INTACT STABILITY may be called in any order and as many times as desired. COEFFICIENT must follow the call to DRAFT but can be called numerous times. The last

job called is subprogram FINISH which terminates the program execution.

On the following pages will be a description of the parameter names and values which control the execution in each subprogram. The explanation of the terminology used is found in Section B.2.

C.3.a Subprogram TERMINAL

This subprogram specifies what type of terminal is being used for the output of results from the program. The output can be printed at a high speed terminal (usually at the data center) or a 30 character per second terminal. In addition many terminals have only 80 columns for printouts rather than 132. This subprogram will specify which of the above terminals is being used. If output is being sent to a high speed, 132 column printer, this subprogram need not be called, for these are the default output devices.

<u>(1) Output Parameter</u>	<u>Definition</u>
TERMINAL TYPE = n <u>Default:</u> TERMINAL TYPE = 0	This parameter specifies the type of terminal being used n = 0 High speed terminal n = 1 30 cps terminal
LINE LENGTH = n <u>Default:</u> LINE LENGTH = 132	This parameter specifies the number of output columns available on a printer. Usually it will be either 80 or 132

(2) Examples of use of *TERMINAL

(a) *TERMINAL (TERMINAL TYPE = 1, LINE LENGTH = 80)

Action:

The program will assume a terminal that works at a 30 cps rate without a form feed and has only 80 column width paper.

(b) *TERMINAL (LINE LENGTH = 80)

Action:

The program will output to a high speed terminal only using 80 columns.

C.3.b Subprogram UNITS

This subprogram presets the units to be used in all processing. It allows the user to use any combination of units within the allowable parameters. The values of the mass density of sea water and gravity are changed to match the units used. Gravity is initialized at 32.174 ft/sec^2 , the mass density of sea water is $8.8880 \times 10^{-4} \text{ ton sec}^2/\text{ft}^4$, and the kinematic viscosity of sea water is $1.1057 \times 10^{-5} \text{ ft}^2/\text{sec}$, since the initial units are:

Length - feet
Force - long tons
Time - seconds

If these initial values are acceptable, subprogram UNITS need not be called.

(1) Output Parameter

LIST

Default:
LIST OFF

If LIST is specified, a list of units, mass density, viscosity and acceleration of gravity will be printed.

(2) Processing Parameters

LENGTH = name

Initial Value:
LENGTH = FT

Length units are specified. The allowable length units are:

FT : feet
IN : inches
M : meters
CM : centimeters
MM : millimeters

If the length unit is changed, the physical constants are reset to the correct numerical values by the program.

FORCE = name

Initial value:
FORCE = LT

Force units are specified. The allowable force units are:

LT : long tons
ST : short tons
LB : pounds
MT : metric tons
KG : kilograms

Values are treated as forces, and the physical constants are adjusted accordingly.

RHO = n

Initial value:
RHO = 8.8880E-4
 $10^{-4} \text{ ton sec}^2/\text{ft}^4$

The program's assumed value for mass density of water is overridden by the given value, n. "n" is given in force - $\text{sec}^2/\text{length}^4$ units. It is also γ/G where γ is the density

	of sea water in weight/volume. The initial value is for salt water at 70°F.
G = n	The gravitational constant is over- ridden by the indicated n. "n" is given in length/sec ² units.
Initial value: G = 32.174 ft/sec ²	
VISCOSITY = n	The initial value of kinematic vis- cosity for salt water at 70°F is overridden by the given value n. "n" is given in length squared per time units.
Initial value: VISCOSITY = 1.1057 x 10 ⁻⁵ ft ² /sec	
RESTORE	The length and force units will be restored to feet and long tons respectively. The value of grav- ity, viscosity and density will also be changed accordingly.

(3) Examples of use of UNITS

(a) *UNITS (FORCE = LB, LIST, RHO = 1.93945)

Action:

The program will use pounds for the force unit.
It will reset the value of the mass density of
water to 1.93945 lbs-sec²/ft⁴ which is the value
for fresh water and then print a table of current
units and constants.

(b) *UNITS (FORCE = MT, LENGTH = M)

Action:

The program will use metric tons as a force unit,
meters as a length unit and reset the accelera-
tion of gravity and mass density and viscosity of
salt water to the appropriate units.

C.3.c Subprogram OFFSETS

This subprogram reads the ship geometry data from a data file which was explained in C.1. The ship hull is defined by offsets in a format compatible with the Navy's Ship Hull Characteristics Program.

(1) Input/Output Parameters

- | | |
|-----------------------------|--|
| (a) FILE = MMTXXXX | Specifies the name of the offset data file describing the ship's geometry. The file name is "MMT" followed by four letters of the user's choice. |
| (b) LIST | If LIST is specified then a list of the station offsets and the forward and aft profiles will be given. |
| <u>Default:</u>
LIST OFF | |

(2) Example of use of OFFSETS

*OFFSET (FILE = MMTSL7 LIST)

Action:

The program will read the offset information from data file MMTSL7 which is stored on the system. It will also list the offsets for each station.

C.3.d Subprogram DRAFT

This subprogram determines the equilibrium position of the ship so that various calculations and tasks may be performed. As mentioned in A.2, the ship's weight and center of gravity must be determined so that an equilibrium floating position may be found. Subprogram DRAFT can only be called after subprogram OFFSETS has been called since the geometric description of the vessel is needed to establish equilibrium. To determine where the vessel will float one of three options must be given:

- 1) Input a weight curve from a data file as explained in A.2 and C.2; or
- 2) Input weight and the centers of gravity; or
- 3) Input the drafts forward and aft

Once the ship's equilibrium condition is determined, that is trim, heel and draft, various tasks can be performed:

- 1) Hydrostatics - volumes, centroids, trim and stability data
- 2) Strength - shear forces and bending moments at different longitudinal locations
- 3) Springing - preparation of offset data files for USCG springing program (3)
- 4) Motions - Preparation of ship motion data file for modified SCORES program (1)

In addition to the still water condition, the hydrostatics and strength calculations can be performed in waves.

The different control parameters for this subprogram are listed below:

(1) Input/Output Parameters

- | | |
|-------------------------------|--|
| (a) NOLIST | If NOLIST is specified, the printed output of balancing, hydrostatics and bending moment are suppressed. |
| <u>Default:</u>
NOLIST OFF | |
| (b) LIST | If LIST is specified, the table of wetted offsets for each station is printed. |
| <u>Default:</u>
LIST OFF | |

(c) SPRING = SPGXXXX

If SPRING is specified the offset data file for the SPRINGING program is prepared and written to a file and assigned the name of SPGXXXX. The filename is "SPG" followed by four letters of the user's choice.

(d) OUTPUT = DMXXXXX

If OUTPUT is specified, a ship motion data file is prepared for the modified SCORES program, written to a file and assigned the name "DMXXXXX". The file name is "DM" followed by five letters of the user's choice.

(e) TITLE

Default:
TITLE off

If TITLE is specified a new descriptive name of up to 40 letters will be read from the next line following the *DRAFT command.

(f) WTDIST = DWXXXXX

If WTDIST is specified a weight curve, as explained in 3.A.3 and 3.C.2, will be read from a file whose name is "DWXXXXX". The file name is "DW" followed by five letters of the user's choice.

(2) Processing Parameters

(a) XF = n

Default:
XF = first station distance from the FP

"n" is the distance from the forward perpendicular along the x-axis to the forward draft marks of the vessel.

(b) XA = n

Default:
XA = last station distance from the FP

"n" is the distance from the forward perpendicular, along the x-axis, to the aft draft marks of this vessel

(c) TF = n

"n" is the draft at the forward marks, which is at XF from the forward perpendicular

(d) TA = n

"n" is the draft at the aft marks which is at XA from the forward perpendicular

(e) DRAFT = n

"n" is the even keel draft the vessel is floating. Same as saying TF = TA = DRAFT

(f) WEIGHT = n or
WT = n

"n" is the ship's weight in force units

(g) LCG = n or
XCG = n

Default:
LCG = Length/2

"n" is the distance from the forward perpendicular to the ship's longitudinal center of gravity

- (h) $KG = n$ or $VCG = n$ "n" is the distance from the base-
or $ZCG = n$ line to the ship's vertical center
of gravity
Default:
 $KG = \text{Ship's depth}/2$
- (i) $HCG = n$ or "n" is the distance from the center-
 $YCG = n$ line to the horizontal center of
gravity (positive starboard)
Default:
 $HCG = 0.0$
- (j) $TRIM = n$ "n" is the ship's trim in length
units with bow up defined as positive
Default:
 $TRIM = 0.0$
- (k) $HEEL = n$ "n" is the ship's heel in degrees
with starboard down defined as
positive
Default:
 $HEEL = 0.0$
- (l) $WAVE = n$ "n" is the type of wave system
n=0 trochoidal wave
n=1 sinusoidal wave
n=2,3,...9 irregular waves
(sum of n sine waves)
The format for inputting the wave
data will be described at the end
of this section
- (m) $EQUAL\ STATIONS = n$ "n" is the number of equal stations
that the wetted hull will be inter-
polated to for use in ship motion
and/or springing program input data
Default:
 $EQUAL\ STATIONS$
off
- (n) $POINTS = n$ If $EQUAL\ STATIONS$ is specified, "n"
equally spaced points will describe
each wetted contour
Default:
 $POINTS = 12$

If $WAVE$ is given, the ship will be analyzed for a quasi-static condition. A wave is described by giving the height location of the crest from the forward perpendicular, the wave length and the angle of the wave relative to the ship's centerline. 0° is stern seas, 180° head seas and 90° port beam seas.

The input of the wave data is on cards (or lines) following the *DRAFT job parameter list and the TITLE line (only TITLE is specified on DRAFT card). The format of these cards are as follows:

Line 1 to number of waves

<u>Variable</u>	<u>Columns</u>	<u>Definition</u>
HEIGHT	1-10	Height of wave crest to trough
WAVLEN	11-20	Wave length
CREST	21-30	Location of CREST of wave measured from the forward perpendicular
HEAD	31-40	Heading of wave relative to centerline. 0° following seas, 180° head seas and 90° port beam seas.

Line 1 is repeated for each sine wave if irregular wave input is specified.

(3) Examples of Use of DRAFT

(a) *DRAFT (XCG = 350., WEIGHT = 40000., KG = 15. LIST)

Action:

The program will set the ship's weight to 40000, longitudinal center of gravity 350. from the forward perpendicular and the vertical center of gravity 15 from the baseline. The ship will be balanced and the hydrostatic properties of the equilibrium conditions will be printed. Since LIST is specified, a list of the wetted offsets will be printed.

(b) *DRAFT (WTDIST = DWMAR, ZCG = 29.0, NWAWE = 1, TITLE)

MARINER - FULL LOAD DEPARTURE IN WAVES

5,2000 520.000 260.0000 0.0000

Action:

The program will read the longitudinal weight curve from a file named "DWMAR" which was explained in Sections A.2 and C.2. The vertical center of gravity is 29.0 feet above the keel. The title that is printed on the top of each page of output will be "MARINER FULL LOAD DEPARTURE IN WAVES". The ship will be balanced in a sinusoidal wave of 5.2 feet length, crest at midships (260 ft. from FP) from the following seas. The hydrostatics and shear force and bending moment will be printed for this condition.

(c) *DRAFT (WTDIST = DWWOL2, ZCG = 20.0,

OUTPUT = DMWOL2, SPRING = SPGWOL2,

EQUAL STATIONS = 21, POINTS = 18)

Action:

The program will read the longitudinal weight curve from a file named "DWWOL2" and assigns the value of 20.0 to the ship's KG. The ship can now be balanced, that is, an equilibrium position can be found (i.e., drafts, trim and heel). Since equal stations was stipulated the wetted hull will be interpolated to 21 equally spaced stations with 18 points on each station. A ship motion data file, "DMWOL2", for the modified SCORES program and a springing offset data file, "SPGWOL2", are created.

C.3.e Subprogram GROUNDING

This subprogram determines the equilibrium position of a ship that has run aground. As explained in A.2, the ship's weight and LCG must be determined so that the equilibrium position can be found. As in subprogram DRAFT, subprogram GROUNDING can be executed only after OFFSETS has been called. The vessel's pre-grounding equilibrium condition is found using one of three options

- (1) Input a weight curve from a data file as explained in A.2 and C.2
- (2) Input ship's weight and centers of gravity
- (3) Input the drafts forward and aft.

Once this condition has been determined the grounding force acting on the vessel can be calculated. Three parameters describe grounding; the shoal water depth, the shoal length and the location of the grounding point on the ship. (See Figure 3.6)

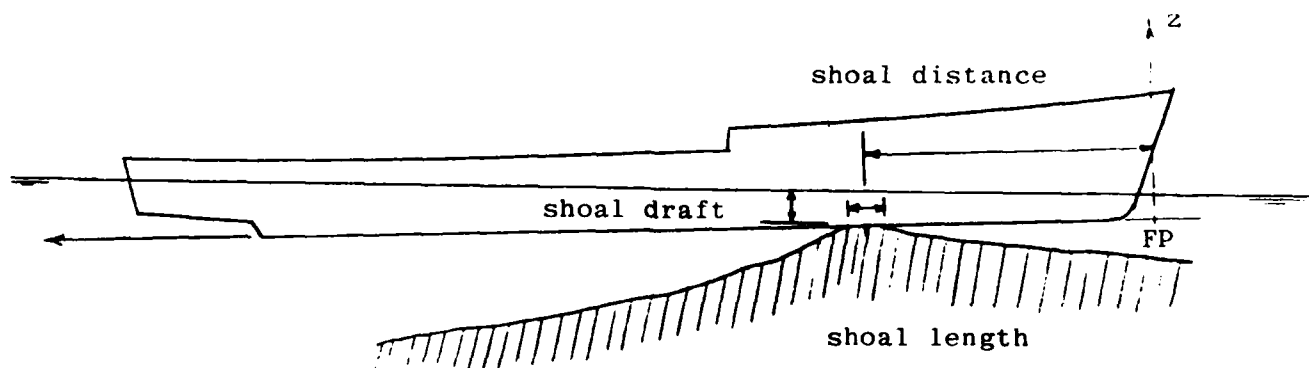


Figure 3.6

The hydrostatic properties are printed for the grounded condition. If the weight curve was used as input, a bending moment and shear force are also outputted.

The different control parameters for this subprogram are listed below.

(1) Input/Output Parameters

- (a) TITLE If TITLE is specified a new descriptive name, up to 40 letters will be read immediately following the *GROUNDING parameter list.
- Default:
 TITLE off
- (b) WTDIST = DWXXXXX If WTDIST is specified a weight curve, as explained in A.2 and C.2, it will be read from a file named DWXXXXX. The file name is "DW" followed by five letters of the user's choice.

(2) Processing Parameters

- (a) XF = n Same as subprogram DRAFT
- (b) XA = n Same as subprogram DRAFT
- (c) TF = n Same as subprogram DRAFT
- (d) TA = n Same as subprogram DRAFT
- (e) DRAFT = n Same as subprogram DRAFT
- (f) WEIGHT = n Same as subprogram DRAFT
- (g) LCG = n Same as subprogram DRAFT
- (h) KG = n Same as subprogram DRAFT
- (i) TRIM = n Same as subprogram DRAFT
- (j) SHOAL DRAFT = n "n" is the depth of water at the point where the ship has run aground
- Default:
 SHOAL DRAFT = 0.0
- (k) SHOAL LOCATION = n "n" is the point where the vessel has run aground measured from the F.P. in the ship's coordinate system
- Default:
 SHOAL LOCATION =
 5% of ship's
 length
- (l) SHOAL LENGTH = n "n" is the length of shoal which the ship's bottom is aground on. This is used for distributing the grounding load
- Default:
 SHOAL LENGTH =
 1% of ship's
 length

(3) Examples of use of GROUNDING

- (a) *GROUNDING (XCG = 350.0, WT = 40000., KG = 15.0,
 SHOAL LOCATION = 30.0)

Action:

 The program will set the ship's weight to 40,000, the longitudinal center of gravity 350.0 from the forward perpendicular and the vertical center of gravity 15.0 from the baseline. The ship will be balanced to establish the equilibrium condition.

The ship runs aground 30.0 from the forward perpendicular on a shoal of 0.0 depth. The hydrostatic properties will be printed for the grounded condition.

- (b) *GROUNDING (WTDIST = DWMAR, SHOAL DRAFT = 5.0,
ZCG = 29.0)

Action:

The program will read the longitudinal weight curve from a file named "DWMAR" and set the vertical center of gravity to 29.0 feet above the keel. The shoal depth is 5.0 feet, the shoal location 5% of the vessel's length aft of the F.P. and the length of the shoal touching the bottom will be assumed 1% of the vessel's length. First, the before grounding condition is found then the equilibrium condition for the grounded vessel is determined. Hydrostatic properties and shear forces and bending moments will be printed for the grounded vessel.

C.3.f Subprogram INTACT STABILITY

This subprogram calculates the cross curves of stability for a vessel. The cross curves of stability are a calculation of righting arm versus the angle of heel versus displacement. (See figure 3.7).

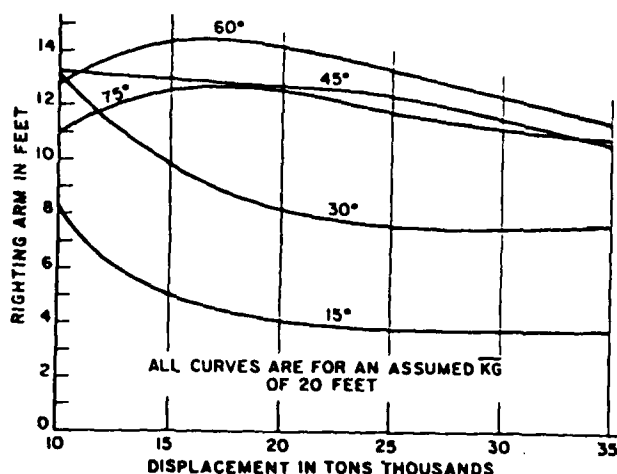


Figure 3.7 From (9)

The vessel's trim, vertical center of gravity and horizontal center of gravity are also needed.

The different control parameters for this subprogram are listed below:

(1) Input Parameter

TITLE

Default:
TITLE off

If TITLE is specified, a new descriptive name of up to 40 letters will be read from a line immediately following the *INTACT STABILITY control statement.

(2) Processing Parameters

(a) TRIM = n

Default:
TRIM = 0.0

"n" is the ship's trim in length units with positive defined as bow up. This is also defined as the difference between the aft and forward draft

(b) XF = n

Default:
XF = first station distance from the F.P.

"n" is the distance to the forward mark measured from the forward perpendicular in length units. Needed only if TRIM is not zero

- (c) XA = n "n" is the distance to the aft mark measured from the forward perpendicular in length units. Needed only if TRIM is not zero.
- Default:
 $XA = \text{last station distance from A.P.}$
- (d) KG = n or VCG = n "n" is the distance from the baseline to the ship's vertical center of gravity following the *INTACT STABILITY parameter list.
- or ZCG = n
- Default:
 $KG = \frac{1}{3} \text{ ship's depth}$
- (e) HCG = n or "n" is the distance from the centerline to the horizontal center of gravity (positive to starboard)
- YCG = n
- Default:
 $HCG = 0.0$
- (f) HEEL1 = n "n" is the initial heel angle in degrees for the cross curves of stability
- Default:
 $HEEL1 = 10.0$
- (g) HEEL2 = n "n" is the final angle in degrees for the cross curves of stability
- Default:
 $HEEL2 = 80.0$
- (h) HEELINC = n "n" is the heel increment in degrees used to go from HEEL1 to HEEL2 in the cross curves of stability
- Default:
 $HEELINC = 10.0$
- (i) DISPl = n "n" is the initial displacement in force units for the cross curves of stability
- Default:
 $DISPl = 0.1 * L * B * \text{Depth} * \text{Density}$
- (j) DISP2 = n "n" is the final displacement, in force units, for the cross curves of stability
- Default:
 $DISP2 = 10.0 * \text{Default DISPl}$
- (k) DISPINC = n "n" is the increment of displacement used to go from DISPl to DISP2 in the cross curves of stability
- Default:
 $DISPINC = \text{Default DISPl}$
- (l) WAVE = n Same description as in subprogram DRAFT so that cross curves of stability can be performed for quasi-static conditions

(3) Examples of use of INTACT STABILITY

(a) *INTACT STABILITY (DISP1 = 2000., DISP2 = 30000.,
DISPINC = 2000., KG = 28.0, TITLE, WAVE = 1)
MARINER - SINE WAVE - CREST MIDSHIPS
5.2000 520.0000 260.0000 0.0000

Action:

The program will calculate the cross curves of stability for a Mariner in a sinusoidal wave whose crest is at midships and amplitude of 5.2 feet. The KG is 28.0 feet, the displacements used will be 2000 to 30000 in steps of 2000 tons, and the heel angles will be 10 degrees to 80 degrees in steps of 10 degrees.

(b) *INTACT STABILITY.

Action:

The program will perform the calculations for 10° to 80° in steps of 10° with an assumed KG of half the ship's depth. The default values for the displacement range will also be used.

C.3.g Subprogram COEFFICIENTS

The subprogram generates the two-dimensional pressures and added mass and damping coefficients for 25 frequencies. The pressures for heave, sway and roll and the added mass and damping for heave, sway, roll, sway-roll, cross-coupling and roll-away-coupling are calculated. The pressures are calculated at the midpoints of line segments described by consecutive offset points.

These values are calculated using conformal mapping or close-fit techniques. The accuracy obtained using the conformal mapping technique improves as more coefficients are added. Likewise, with the close-fit method, the more offset pairs used, the greater the accuracy. Using Frank, the offset pairs should be evenly spaced for best results, therefore, a midship section might need extra points for the side and bottom. This is automatically done by the program by specifying the maximum distance between points so that extra offset pairs can be inserted.

Subprograms OFFSETS and DRAFT must be called before calling this subprogram.

(1) Output Parameters

(a) NOLIST

Default:
NOLIST off

If NOLIST is specified, the printing of the two-dimensional hydrodynamic properties is suppressed

(b) LIST

Default:
LIST off

If LIST is specified, the mapping coefficients and the OFFSETS are listed

(c) OUTPUT = TDXXXXX

If OUTPUT is specified, two-dimensional hydrodynamic properties written to TAPE 3 are saved under a file name TDXXXXX. The file name is "TD" followed by five letters of the user's choice.

(2) Processing Parameters

(a) DMAX = n

Maximum distance between adjacent offset points. If distance greater than n, then additional offset pairs are inserted by the program.

- (b) YMAX = n Maximum horizontal distance between adjacent offset pairs, otherwise same as DMAX.
- (c) ZMAX = n Maximum vertical distance between adjacent offset pairs otherwise same as DMAX.
- (d) FIRST STATION = n Specifies first station for which the two-dimensional hydrodynamic coefficients will be calculated.
 Default:
 FIRST STATION = 1
- (e) LAST STATION = n Specifies last station for which two-dimensional hydrodynamic coefficients will be calculated.
 Default:
 LAST STATION =
 Maximum station
- (f) MAPPING ERROR = n Specifies the mapping error tolerance percent for determining if section is mapped accurately.
 Default:
 MAPPING ERROR =
 2.0%
- (g) NUMBER COEFFICIENTS = n Specifies maximum number of mapping coefficients to be used. Maximum value is 9. If "n" is defined as 2 or less, then a Lewis form is assumed.
 Default:
 NUMBER COEFFICIENTS = 9
- (h) MAXPOINTS = n Specifies the maximum number of points to be used in Frank close fit method. Maximum is 20 points.
 Default:
 MAXPOINTS = 20
- (i) MAPPING If MAPPING is specified, all sections from FIRST STATION to LAST STATION will attempt to be mapped and two-dimensional coefficients will be calculated. If a section cannot be mapped, FRANK will be used.
 Default:
 MAPPING ON
- (j) FRANK If FRANK is specified hydrodynamic, properties of all sections from FIRST STATION to LAST STATION will be performed using the FRANK close fit method
 Default:
 FRANK off

(3) Example of use of COEFFICIENTS

- (a) *COEFFICIENTS (DMAX = 1.0, OUTPUT = TDWOL2)

Action:

The program will calculate added mass and damping for heave, sway, roll and sway-roll cross couplings. The maximum distance between adjacent offset points is 1.0 (but a maximum of 20 points). The hydrodynamic results will be written to a file called TDWOL2.

IV. DESCRIPTION OF OUTPUT SCHEME

A description of the output format will be given with a sample run shown in Appendix A, using the input file given below:

```
*TERMINAL(LINE LENGTH=80)
*UNITS(LIST)
*OFFSETS(FILE=MMTSL7,LIST)
*DRAFT(DRAFT=20.0)
*DRAFT(TF=25.0,TA=25.0)
*DRAFT(WT=47760.0000,LCG=478.8632,KG=42.31,TITLE)
SL-7 FULL LOAD EXAMPLE
*GROUNDING(WTDIST=DWSL7FU,SHOAL LENGTH=5.0,SHOAL LOCATION=50.0,
  SHOAL DRAFT=5.0,KG=42.31,TITLE)
SL-7 FULL LOAD GROUNDING EXAMPLE
*INTACTSTABILITY(DISP1=15000,DISP2=50000,DISPINC=5000,KG=30.,
  TITLE)
SL-7 INTACT STABILITY EXAMPLE
*DRAFT(WTDIST=DWSL7BA,KG=40.26,WAVE=1,TITLE)
SL-7 BALLAST-L/20 WAVE TROUGH AMIDSHIPS
  1
  44.0250  880.5000   0.0000   0.0000
*DRAFT(WTDIST=DWSL7FU,KG=42.31,TITLE,EQUALSTATION=21,
  POINTS=19,LIST)
SL-7 - NORMAL FULL LOAD DEPARTURE
*COEFFICIENT(FIRSTSTATION=1,LASTSTATION=1)
*COEFFICIENT(FIRSTSTATION=11,LASTSTATION=11,LIST)
*COEFFICIENT(FIRSTSTATION=11,LASTSTATION=11,FRANK)
*FINISH.
```

The *TERMINAL commands sets the output format to 80 columns per line. *UNITS indicates that the default units for the program will be used and will be printed (page A-2). The *OFFSETS job name reads the ship geometric data from file MMTSL7 and then lists the offsets (pg A-4 to A-10).

The *DRAFT job name runs the hydrostatic properties of the SL-7 for a 20 ft. draft (pgs A-12 to A-13). The next line uses a slightly different input for the same type of results for a 25 ft. draft (pg A-15 to A-16). The third call to *DRAFT involves the balancing of the vessel. The weight properties of the SL-7 are given and the ship will adjust itself until it is in equilibrium (page A-17). For this

equilibrium condition the hydrostatic properties are printed (page A-18 to A-19). A title is read in for these calculations and is printed at the top of each page (pg A-17 to A-19).

The *GROUNDING job name indicates the ship has run aground on a shoal of 5.0 ft. in length and a water depth of 5.0 ft. at a point 50 ft. from the ship's forward perpendicular. Before the ship ran aground the weight conditions are found from data file DWSL7FU, which corresponds to a full load condition. This weight curve and weight summary (pg A-21) is used to determine the ship's drafts before running aground (pg. A-22). The shoal is an external force on the vessel which causes it to balance differently (pg A-23) and to have a considerable effect on shear force and bending moment (pg A-24). The hydrostatic properties are printed for this grounded condition (pg A-25 to A-26). Again a new title is read for the output and is printed at the top of each page (pg A-21 to A-26)

The *INTACT STABILITY command runs the calculation. The cross curves of stability are calculated for displacements of 15000 long tons to 50000 long tons in increments of 5000 long tons and angles of heel of 10 degrees to 80 degrees in steps of 10 degrees. The heel angles are program default values and were left unchanged. The cross curves of stability are righting arms and their tangents for various displacements and angles of heel (pg. A-28 to A-31). Again, a title is specified for the top of each page of output.

The next command, *DRAFT, reads the weight curve for a ballast condition of the SL-7 (pg A-33). The vessel will be balanced in a sinusoidal wave of amplitude 22 ft., wave length 380.5 ft. and trough amidships (pg A-34 to A-35). The shear force and bending moment for this condition (pg A-36) and hydrostatics (pg A-37 to A-38) are given. Again a new title is specified for this job.

The final *DRAFT command is for a full load condition of the SL-7 whose weight curve is read from file DWSL7FU (pg A-40). The vessel is balanced for this condition and shear force and bending moments calculated (pg A-41 to A-42). The station arrangement for the vessel is changed to 21 equal stations with 19 points per station for subsequent calls of hydrodynamic calculations and for the hydrostatic properties (pg A-43 to A-47).

Rather than calculating the added mass and damping for all 21 stations, three stations were run. The first call to *COEFFICIENT calculates the added mass and damping for station 1 (pg A-49). Since it was a bulbous bow, the Frank close fit procedure was chosen. The nomenclature for the added mass and damping is given below:

Frequency Parameter	$\frac{\omega^2 D}{g}$	<u>Dimensions</u> Non-Dimensional
A' ₃₃	heave added mass	F-sec ² /L ²
N' _Z	heave damping	F-sec/L ²
M _S	sway added mass	F-sec ² /L ²
N _S	sway damping	F-sec/L ²
M _{S.r.}	added mass for sway-roll cross coupling	F-sec ² /L ²
N _{S.r.}	damping for sway-roll cross coupling	F-sec/L ²
I _r	added moment of inertia in roll	F-sec ²
N _r	roll damping	F-sec

where

F is force units

L is length units

D is station draft

ω is frequency (radians/second)

g is acceleration of gravity

The second call to *COEFFICIENTS is for station 11 which is midships. Since the section can be handled by conformal mapping and LIST is specified, the mapping coefficients are calculated (pg A-51). The added mass and damping are then outputted (pg A-52).

The final call to *COEFFICIENTS is again for station 11 but this time FRANK is specified. The Frank close fit method is used to calculate the added mass and damping (pg A-54) and corresponds fairly well to the conformal mapping technique.

The final call of this job is to *FINISH which terminates the execution of the program.

V. TIMING AND ERROR MESSAGES

The compilation time required for program STATIC is 6 CPU, with about 44K of core needed to load the program and 36K for execution. The job file needed for the compilation is shown in Table 1, Appendix B. The compiled (binary) version of STATIC is stored in a file called STATBIN and can be used for subsequent runs therefore saving the compilation costs. Table 2, Appendix B shows the job sequence needed for the execution of program STATIC using the compiled program.

The computation time for running STATIC varies tremendously and is a function of many variables. The number of stations and number of points per station effect the running time. Each sub-program requires various running times associated with it's task. The SL-7 is a representative ship whose computation times will be discussed. The example run shown in Chapter IV had running times as shown in the following Table.

LIST OF STATIME

CPU LAST JOB =	.371 SEC.	TOTAL CPU =	.371 SEC.
*TERMINAL(LINELENGTH=80,TERMINAL TYPE=-1)			
CPU LAST JOB =	.011 SEC.	TOTAL CPU =	.382 SEC.
*UNITS(LIST)			
CPU LAST JOB =	.034 SEC.	TOTAL CPU =	.416 SEC.
*OFFSETS(FILE=MMTSL7,LIST)			
CPU LAST JOB =	.631 SEC.	TOTAL CPU =	1.047 SEC.
*DRAFT(DRAFT=20.0)			
CPU LAST JOB =	.367 SEC.	TOTAL CPU =	1.414 SEC.
*DRAFT(TF=25.0,TA=25.0)			
CPU LAST JOB =	.380 SEC.	TOTAL CPU =	1.794 SEC.
*DRAFT(WT=47760.0000,LCG=478.8632,KG=42.31,TITLE)			
CPU LAST JOB =	1.430 SEC.	TOTAL CPU =	3.224 SEC.
*GROUNDING(WTDIST=DWSL7FU,SHOAL LENGTH=5.0,SHOAL LOCATION=50.0, SHOAL DRAFT=5.0,KG=42.31,TITLE)			
CPU LAST JOB =	29.612 SEC.	TOTAL CPU =	32.836 SEC.
*INTACTSTABILITY(DISP1=15000,DISP2=50000,DISPINC=5000,KG=30., TITLE)			
CPU LAST JOB =	40.375 SEC.	TOTAL CPU =	73.211 SEC.
*DRAFT(WTDIST=DWSL7BA,KG=40.26,WAVE=1,TITLE)			
CPU LAST JOB =	5.129 SEC.	TOTAL CPU =	78.340 SEC.
*DRAFT(WTDIST=DWSL7FU,KG=42.31,TITLE,EQUALSTATION=21, POINTS=19,LIST)			
CPU LAST JOB =	1.593 SEC.	TOTAL CPU =	79.933 SEC.
*COEFFICIENT(FIRSTSTATION=1, LASTSTATION=1)			
CPU LAST JOB =	13.042 SEC.	TOTAL CPU =	92.975 SEC.
*COEFFICIENT(FIRSTSTATION=11, LASTSTATION=11, LIST)			
CPU LAST JOB =	3.468 SEC.	TOTAL CPU =	96.443 SEC.
*COEFFICIENT(FIRSTSTATION=11, LASTSTATION=11, FRANK)			
CPU LAST JOB =	16.049 SEC.	TOTAL CPU =	112.492 SEC.
*FINISH.			

- 7 -

The total time for running *TERMINAL, *UNITS, and *OFFSETS is around one computational unit (CPU). This is fairly constant for all types of ships. The *DRAFT sub-program can have various tasks and the times are all relatively small. If the vessel's position is given, that is the drafts and/or heel, the hydrostatic calculations will require about 1/2 CPU. If balancing of the vessel is performed, the typical running time is from 1 to 2 CPU provided there is no heel. As the heel angle becomes larger the computation time will increase. The *DRAFT examples in Chapter IV are for a zero heel condition.

The *GROUNDING routine requires substantial computations since it is an excessive trim condition. The running time can typically take from 20 to 40 CPU depending upon shoal location and shoal draft. The time in the above examples was 29.3 CPU.

The *INTACT STABILITY is a lengthy calculation because 64 points were computed for the Cross Curves of Stability (8 displacements with 8 heel angles) and required about 41 CPU. The small heel angles (10° to 30°) require about half the CPU time as the larger heel angles (60° to 80°). With this in mind, care should be exercised in choosing the range of heel angles which are necessary for a particular vessel.

The *COEFFICIENT sub-program is the most costly of all the subprograms in STATIC. This sub-program calculates the added mass and damping of each station at twenty-five specific frequencies. Hydrostatic conditions of the vessel should be checked thoroughly before executing this program, since it is expensive. The time of computation for one station is 10 to 20 CPU for the Frank close fit method. The conformal mapping approach can take from 3 to 30 CPU and is a function of the number of mapping coefficients needed to describe a station adequately. As seen in our example, Station 11 required 3.5 CPU using conformal mapping (3 mapping coefficients) but required 16 CPU using the close fit technique.

The error messages are printed by the program at the time of error and are self-explanatory. The three types of errors that might be incurred while running STATIC are:

- 1) File
- 2) Variable name or value
- 3) Array exceedence

If a file is to be used by STATIC, it must be saved on your user number. An error message will tell you if the program cannot find a file. The most probable reason for this error is a misspelling of the file name. The second problem associated with file manipulation involves an output file. It is not possible to save a file, such as a SPRINGING or MOTION file, if one already exists on the system with the same name.

An error message will occur if a variable name does not match one specified by the program. For instance, *UNITS (LENGHT=M) would produce an error message indicating that LENGHT was not found as a permitted variable name. This is a logical conclusion since the spelling should be LENGTH. Likewise, if *UNITS (LENGTH=METERS) were given, an error message would also result. METER is not a permitted variable value, while M would be the desired value.

Array exceedance is caused by inputting more data than permitted. The following is a list of maximum numbers used by STATIC, and is repeated from Chapter III.

Stations	41
Points per station	29
Weight elements	200
Number of mapping coefficients	9

If any of these numbers are exceeded, an error message will be provided to indicate the problem area.

VI. REFERENCES

1. Hoffman, D. and Zielinski, T.E., "Integrated Seakeeping Analysis (ISA) Computer Program", Hoffman Maritime Consultant, Inc., HMC Report 7660H, Oct. 1976.
2. Aughey, M., "Ship Hull Characteristics Calculations", SNAME Local Section Paper at Hampton Roads, September 1968.
3. Zielinski, T. E., "Further Developments in the Theory of Springing Applied to a Great Lakes Bulk Carrier", Appendices A-F, Webb Institute Report prepared for the U. S. Coast Guard February 1974.
4. Hoffman, D., "Distribution of Wave Cuased Hydrodynamic Pressures and Forces on a Ship Hull", NSMET, publication #92, Norwegian Ship Model Experimental Tank, 1966.
5. Hoffman, D., and Zielinski, T.E., "A New Approach to the Ship Hull Form Characteristics Problem", Metropolitan Section SNAME, January 1974.
6. Van Hooff, R., "Sectional Hydrodynamic Coefficients for Heave, Sway and Roll", Report to American Bureau of Shipping, New York, January 1975.
7. Frank, W., "Oscillation of Cylinders In or Below the Free Surface of Deep Fluids", Hydrodynamic Laboratory Research and Development Report 2375, October 1967.
8. Bedel, J.W. and Lee, C.M., "Numerical Calculation of the Added Mass and Damping Coefficients of Cylinders Oscillating in or Below a Free Surface", Ship Performance Department Research and Development Report 3551, March 1971.
9. Comstock, J.P., ed., Principles of Naval Architecture, SNAME, New York, 1967.
10. Rawson, K.J. and Tupper, E.C., "Basic Ship Theory", Vols. 1 and 2, Longman, New York, 1976.
11. Paulling, J.R., "The Transverse Stability of a Ship in a Longitudinal Seaway", Journal of Ship Research, Vol. 4, No. 4, March 1961.
12. Zielinski, T.E., "The Use of Conformal Mapping in Ship Design", Senior Thesis, Webb Institute Report, June 1972.
13. Lewis, F.M., "The Inertia of Water Surrounding a Vibrating Ship", SNAME Transactions, 1929.

14. Porter, W.R., "Pressure Distribution, Added Mass and Damping Coefficients for Cylinders Oscillating in a Free Surface", University of California, I.E.R. Report Series 82, Issue 16, July 1960.
15. Ursell, F., "On the Bearing Motion of a Circular Cylinder on the Surface of a Fluid", Quarterly Journal of Mechanics and Applied Mathematics 2, 1949.
16. Zielinski, T.E., "Program HYDRO2D - Two Dimensional Hydrodynamic Properties of Ship Sections", Webb Institute Report to the American Bureau of Shipping, November 1976.
17. Wood, P., "Program Input and Control System "PICSY", Internal report at University of California at Berkeley, 1971.
18. Kaplan P., Sargent, T.P., and Cilmi, J., "Theoretical Estimates of Wave Loads on the SL-7 Container Ship in Regular and Irregular Seas", Ship Structure Committee Report SSC-246, 1974. (used for weight description)

APPENDIX A

PROGRAM STATIC (05/79)

DEVELOPED FOR U.S. COAST GUARD BY:

H O F F M A N M A R I T I M E C O N S U L T A N T S
G L E N H E A D (516)676-8499 N E W Y O R K

07/10/79

10.50.30

-LIST OF UNITS AND PHYSICAL CONSTANTS..

LENGTH UNIT FEET
TIME UNIT SECOND
FORCE UNIT L.TONS

-PHYSICAL CONSTANTS..

GRAVITATIONAL ACCELERATION, G = 32.1740
VISCOSITY OF WATER, NU = .1106E-04
DENSITY OF WATER, RHO = .8880E-03

Note:

A mistake in the SL-7 offsets
will result in slightly
different values.

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 3

*OFFSETS(FILE=MMTSL7,LIST)

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 4

ORIG.OFFSETS TABLE (FEET)

SEA-LAND ?

CONTAINERSHIP

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 1

21 POINTS

X = 0.000

STATION 2

21 POINTS

X = 11.006

STATION 3

21 POINTS

X = 22.013

HEIGHT Z

H-B Y

HEIGHT Z

H-B Y

HEIGHT Z

H-B Y

1	0.000	0.000	1	0.000	0.000	1	0.000	0.000
2	.820	3.035	2	.820	3.180	2	.820	3.324
3	1.640	4.480	3	1.640	4.625	3	1.640	4.769
4	3.281	6.070	4	3.281	6.214	4	3.281	6.359
5	4.921	6.648	5	4.921	6.995	5	4.921	7.082
6	6.562	7.024	6	6.562	7.226	6	6.562	7.515
7	8.202	7.082	7	8.202	7.226	7	8.202	7.573
8	9.842	6.735	8	9.842	6.995	8	9.842	7.284
9	11.483	6.214	9	11.483	6.590	9	11.483	6.937
10	13.123	5.492	10	13.123	5.839	10	13.123	6.301
11	16.404	3.815	11	16.404	4.278	11	16.404	4.654
12	19.685	2.341	12	19.685	2.890	12	19.685	3.324
13	22.966	1.156	13	22.966	1.792	13	22.966	2.283
14	26.247	.289	14	26.247	1.156	14	26.247	1.532
15	29.528	0.000	15	29.528	.867	15	29.528	1.301
16	32.808	0.000	16	32.808	1.098	16	32.808	1.503
17	39.370	1.012	17	39.370	2.023	17	39.370	2.862
18	45.932	2.515	18	45.932	3.613	18	45.932	4.971
19	52.493	4.278	19	52.493	5.839	19	52.493	7.717
20	59.055	6.272	20	59.055	8.382	20	59.055	10.608
21	65.125	8.238	21	65.026	10.897	21	64.993	13.354

STATION 4

21 POINTS

X = 44.025

STATION 5

21 POINTS

X = 66.037

STATION 6

21 POINTS

X = 88.050

HEIGHT Z

H-B Y

HEIGHT Z

H-B Y

HEIGHT Z

H-B Y

1	0.000	0.000	1	0.000	0.000	1	0.000	0.000
2	.820	3.757	2	.820	4.191	2	.820	4.625
3	1.640	5.203	3	1.640	5.578	3	1.640	6.128
4	3.281	6.879	4	3.281	7.399	4	3.281	8.035
5	4.921	7.660	5	4.921	8.527	5	4.921	9.163
6	6.562	8.151	6	6.562	8.671	6	6.562	9.481
7	8.202	8.238	7	8.202	8.902	7	8.202	9.770
8	9.842	8.093	8	9.842	8.816	8	9.842	9.683
9	11.483	7.804	9	11.483	8.527	9	11.483	9.336
10	13.123	7.226	10	13.123	8.093	10	13.123	8.960
11	16.404	5.839	11	16.404	6.648	11	16.404	7.949
12	19.685	4.336	12	19.685	5.347	12	19.685	6.937
13	22.966	3.180	13	22.966	4.393	13	22.966	6.214
14	26.247	2.601	14	26.247	4.133	14	26.247	6.214
15	29.528	2.544	15	29.528	4.336	15	29.528	6.879
16	32.808	3.035	16	32.808	5.000	16	32.808	8.006
17	39.370	5.058	17	39.370	7.602	17	39.370	10.926
18	45.932	7.862	18	45.932	10.984	18	45.932	14.452
19	52.493	11.273	19	52.493	11.909	19	52.493	18.267
20	59.055	14.886	20	59.055	18.788	20	59.055	23.066
21	64.961	18.007	21	64.895	22.545	21	64.797	27.112

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 5

ORIG.OFFSETS TABLE (FEET)

SEA-LAND 7 CONTAINERSHIP

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 7

21 POINTS

X = 110.062

STATION 8

22 POINTS

X = 132.075

STATION 9

22 POINTS

X = 176.100

	HEIGHT Z	H-B Y		HEIGHT Z	H-B Y		HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000	1	0.000	0.000
2	.820	5.145	2	.066	2.890	2	.131	4.336
3	1.640	6.879	3	.820	5.925	3	.820	6.937
4	3.281	8.469	4	1.640	7.226	4	1.640	8.758
5	4.921	9.394	5	3.281	8.960	5	3.281	10.695
6	6.562	9.827	6	4.921	10.059	6	4.921	11.909
7	8.202	10.261	7	6.562	10.666	7	6.562	12.862
8	9.842	10.406	8	8.202	10.752	8	8.202	13.585
9	11.483	10.203	9	9.842	11.273	9	9.842	14.308
10	13.123	10.059	10	11.483	11.330	10	11.483	14.741
11	16.404	9.394	11	13.123	11.273	11	13.123	15.319
12	19.685	8.758	12	16.404	11.128	12	16.404	16.331
13	22.966	8.613	13	19.685	11.041	13	19.685	17.342
14	26.247	9.018	14	22.966	11.330	14	22.966	18.354
15	29.528	9.827	15	26.247	12.140	15	26.247	19.741
16	32.808	11.041	16	29.528	13.151	16	29.528	21.042
17	39.370	14.452	17	32.808	14.597	17	32.808	22.487
18	45.932	18.267	18	39.370	18.094	18	39.370	25.783
19	52.493	22.545	19	45.932	22.112	19	45.932	29.482
20	59.055	27.112	20	52.493	26.303	20	52.493	33.529
21	64.698	31.303	21	59.055	30.927	21	59.055	37.864
			22	64.633	34.974	22	64.534	41.911

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 6

ORIG.OFFSETS TABLE (FEET)

SEA-LAND 7 CONTAINERSHIP

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 10

22 POINTS

X = 220.125

STATION 11

22 POINTS

X = 264.150

STATION 12

22 POINTS

X = 308.175

	HEIGHT Z	H-B Y		HEIGHT Z	H-B Y		HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000	1	0.000	0.000
2	.197	4.336	2	.262	7.226	2	.328	11.562
3	.820	8.960	3	.820	12.284	3	.820	17.198
4	1.640	10.839	4	1.640	14.741	4	1.640	20.233
5	3.281	13.296	5	3.281	18.210	5	3.281	24.424
6	4.921	15.319	6	4.921	20.666	6	4.921	27.025
7	6.562	16.967	7	6.562	22.776	7	6.562	29.338
8	8.202	18.152	8	8.202	24.279	8	8.202	31.216
9	9.842	19.366	9	9.842	25.667	9	9.842	32.806
10	11.483	20.233	10	11.483	26.736	10	11.483	34.107
11	13.123	21.158	11	13.123	27.893	11	13.123	35.465
12	16.404	23.037	12	16.404	30.003	12	16.404	37.489
13	19.685	24.568	13	19.685	31.794	13	19.685	39.136
14	22.966	26.014	14	22.966	33.297	14	22.966	40.408
15	26.247	27.459	15	26.247	34.830	15	26.247	41.622
16	29.528	28.904	16	29.528	36.188	16	29.528	42.720
17	32.808	30.349	17	32.808	37.633	17	32.808	43.790
18	39.370	33.297	18	39.370	40.177	18	39.370	45.697
19	45.932	36.708	19	45.932	42.720	19	45.932	47.605
20	52.493	40.119	20	52.493	45.380	20	52.493	49.224
21	59.055	43.790	21	59.055	45.183	21	59.055	50.871
22	64.370	46.969	22	64.337	50.351	22	64.305	52.027

ORIG.OFFSETS TABLE (FEET)

SEA-LAND 7 CONTAINERSHIP

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 13

22 POINTS

X = 352.200

STATION 14

22 POINTS

X = 396.225

STATION 15

18 POINTS

X = 440.250

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000
2	.394	19.366	2	.591	26.303
3	.820	23.412	3	.820	30.060
4	1.640	27.314	4	1.640	33.962
5	3.281	31.505	5	3.281	38.298
6	4.921	33.962	6	4.921	40.610
7	6.562	36.564	7	6.562	42.778
8	8.202	38.298	8	8.202	44.310
9	9.842	39.888	9	9.842	45.524
10	11.483	41.044	10	11.483	46.478
11	13.123	42.142	11	13.123	47.345
12	16.404	43.934	12	16.404	48.703
13	19.685	45.235	13	19.685	49.715
14	22.966	46.247	14	22.966	50.351
15	26.247	47.171	15	26.247	50.929
16	29.528	47.836	16	29.528	51.305
17	32.808	48.559	17	32.808	51.594
18	39.370	49.715	18	39.370	52.027
19	45.932	50.640	19	45.932	52.374
20	52.493	51.565	20	52.493	52.605
21	59.055	52.259	21	59.055	52.750
22	64.305	52.548	22	64.305	52.750

STATION 16

15 POINTS

X = 484.275

STATION 17

15 POINTS

X = 528.300

STATION 18

17 POINTS

X = 572.325

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000
2	.656	32.751	2	.656	32.751
3	.820	35.650	3	.820	33.911
4	1.640	40.867	4	1.640	38.548
5	3.281	44.635	5	3.281	42.751
6	4.921	46.953	6	4.921	45.359
7	6.562	48.692	7	6.562	47.185
8	8.202	49.910	8	8.202	48.692
9	9.842	50.721	9	9.842	49.649
10	11.483	51.446	10	11.483	50.489
11	13.123	52.025	11	13.123	51.214
12	16.404	52.518	12	16.404	52.083
13	19.685	52.750	13	19.685	52.605
14	22.966	52.750	14	22.966	52.750
15	68.242	52.750	15	68.242	52.750
			16		
			17		

ORIG.OFFSETS TABLE (FEET)

SEA-LAND 7 CONTAINERSHIP

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 19

18 POINTS

X = 616.350

STATION 20

21 POINTS

X = 660.375

STATION 21

21 POINTS

X = 704.400

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000
2	.328	15.941	2	0.000	3.188
3	.820	20.868	3	.820	11.593
4	1.640	26.085	4	1.640	16.028
5	3.281	31.592	5	3.281	22.317
6	4.921	35.505	6	4.921	24.201
7	6.562	38.548	7	6.562	31.302
8	8.202	41.070	8	8.202	34.229
9	9.842	42.954	9	9.842	36.867
10	11.483	44.780	10	11.483	39.041
11	13.123	46.142	11	13.123	40.925
12	16.404	48.547	12	16.404	44.113
13	19.685	50.141	13	19.685	46.634
14	22.966	51.243	14	22.966	48.402
15	26.247	51.938	15	26.247	49.707
16	29.528	52.460	16	29.528	50.750
17	32.808	52.750	17	32.808	51.620
18	68.242	52.750	18	39.370	52.199
			19	45.932	52.750
			20	52.493	52.750
			21	68.242	52.750

STATION 22

22 POINTS

X = 748.425

STATION 23

22 POINTS

X = 770.437

STATION 24

22 POINTS

X = 792.450

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000
2	0.000	2.464	2	0.000	2.174
3	.820	3.246	3	.820	2.609
4	1.640	4.290	4	1.640	3.188
5	3.281	6.724	5	3.281	4.637
6	4.921	9.420	6	4.921	6.521
7	6.562	12.376	7	6.562	8.840
8	8.202	14.985	8	8.202	10.869
9	9.842	17.970	9	9.842	13.274
10	11.483	20.288	10	11.483	15.245
11	13.123	22.781	11	13.123	17.622
12	16.404	27.100	12	16.404	21.767
13	19.685	30.925	13	19.685	25.592
14	22.966	34.200	14	22.966	28.984
15	26.247	37.099	15	26.247	32.288
16	29.528	39.562	16	29.528	35.128
17	32.808	41.823	17	32.808	37.679
18	39.370	45.504	18	39.370	42.171
19	45.932	48.692	19	45.932	45.504
20	52.493	51.301	20	52.493	48.692
21	54.626	52.025	21	54.626	51.359
22	68.242	52.025	22	68.405	52.083

AD-A105 227

HOFFMAN MARITIME CONSULTANTS INC GLEN HEAD NY
USER MANUAL FOR PROGRAM STATIC -- FIRST PART OF
JUL 79 T E ZIELINSKI

F/G 20/4
COAST GUARD SHI--ETC(U)
DOT-C6-74080-B

UNCLASSIFIED

HMC-79141

USCG-M-6-79

NL

2 OF 2

AD-A

10-227

END

DATE

FORMED

10-81

DTIC

ORIG.OFFSETS TABLE (FEET)

SEA-LAND 7 CONTAINERSHIP

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 25

22 POINTS

X = 814.463

STATION 26

15 POINTS

X = 836.475

STATION 27

12 POINTS

X = 858.487

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	11.024	0.000
2	0.000	1.594	2	11.024	3.072
3	.820	1.739	3	11.483	3.623
4	1.640	1.971	4	13.123	4.492
5	3.281	2.522	5	16.404	6.376
6	4.921	3.130	6	19.685	8.840
7	6.562	4.000	7	22.966	11.535
8	8.202	4.782	8	26.247	14.955
9	9.842	5.884	9	29.528	18.549
10	11.483	6.956	10	32.808	22.317
11	13.123	8.289	11	39.370	29.042
12	16.404	11.159	12	45.932	34.780
13	19.685	14.318	13	52.493	36.693
14	22.966	17.535	14	54.626	41.475
15	26.247	21.013	15	68.635	41.475
16	29.528	24.491			
17	32.808	28.027			
18	39.370	33.911			
19	45.932	39.273			
20	52.493	44.055			
21	54.626	45.301			
22	68.537	45.301			

STATION 28

10 POINTS

X = 869.494

STATION 29

9 POINTS

X = 880.500

STATION 30

7 POINTS

X = 902.513

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	22.966	0.000	1	26.247	0.000
2	22.966	2.753	2	26.247	2.058
3	26.247	5.507	3	29.528	5.652
4	29.528	8.898	4	32.808	9.391
5	32.808	12.956	5	39.370	17.390
6	39.370	20.607	6	45.932	24.346
7	45.932	27.303	7	52.493	30.375
8	52.493	33.012	8	54.626	32.085
9	54.626	34.780	9	68.898	32.085
10	68.898	34.780			

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 10

ORIG.OFFSETS TABLE (FEET)

SEA-LAND 7 CONTAINERSHIP

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

AFTER PROFILE

	HEIGHT Z	DIST X
1	0.000	814.463
2	11.024	836.475
3	16.404	858.487
4	22.966	869.494
5	26.247	880.500
6	30.512	902.513
7	68.898	902.513

FORWARD PROFILE

	HEIGHT Z	DIST X
1	0.000	0.000
2	68.898	0.000

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 11

*DRAFT(DRAFT=20.0)

HYDROSTATICS

SEA-LAND 7 CONTAINERSHIP

STATION FROM F.P.	MEAN DRAFT (FEET)	BEAM (FEET)	AREA (FEET **2)	S.A. COEF.	VCB (FEET)	HCB (FEET)
0.0000	20.0000	4.4549	207.670	2.33082	9.3548	0.0000
11.0063	20.0000	5.5699	219.991	1.97482	9.5234	0.0000
22.0125	20.0000	6.4482	231.954	1.79860	9.6584	0.0000
44.0250	20.0000	8.4492	263.383	1.55863	9.9183	0.0000
66.0375	20.0000	10.5114	291.741	1.38773	10.0563	0.0000
88.0500	20.0000	13.7352	328.002	1.19402	10.2703	0.0000
110.0625	20.0000	17.4881	362.878	1.03750	10.5315	0.0000
132.0750	20.0000	22.1383	407.990	.92146	10.7333	0.0000
176.1000	20.0000	34.8792	542.206	.77726	11.2176	0.0000
220.1250	20.0000	49.4145	733.585	.74228	11.4575	0.0000
264.1500	20.0000	63.8776	971.500	.76044	11.3638	0.0000
308.1750	20.0000	78.5166	1242.447	.79120	11.2144	0.0000
352.2000	20.0000	90.6641	1510.813	.83319	10.9819	0.0000
396.2250	20.0000	99.5523	1730.167	.86897	10.8002	0.0000
440.2500	20.0000	104.7928	1886.066	.89990	10.6641	0.0000
484.2750	20.0000	105.5000	1928.614	.91404	10.6179	0.0000
528.3000	20.0000	105.2380	1886.784	.89644	10.6908	0.0000
572.3250	20.0000	103.8612	1788.635	.86107	10.8770	0.0000
616.3500	20.0000	100.4945	1615.585	.80382	11.1980	0.0000
660.3750	20.0000	93.6085	1351.018	.72163	11.7755	0.0000
704.4000	20.0000	80.9146	1038.220	.64155	12.3606	0.0000
748.4250	20.0000	62.4797	697.122	.55788	12.8934	0.0000
770.4375	20.0000	51.8360	538.484	.51941	13.1321	0.0000
792.4500	20.0000	40.3506	393.031	.48702	13.3202	0.0000
814.4625	20.0000	29.2535	268.595	.45908	13.2896	0.0000
836.4750	20.0000	18.1976	107.619	.65883	16.2240	0.0000
858.4875	20.0000	7.8173	23.709	.84345	18.3020	0.0000
869.4938	20.0000	0.0000	0.000	0.00000	20.0000	0.0000
880.5000	20.0000	0.0000	0.000	0.00000	20.0000	0.0000
902.5125	20.0000	0.0000	0.000	0.00000	20.0000	0.0000

HYDROSTATICS

SEA-LAND 7 CONTAINERSHIP

VOLUME (MLD.)	902813.2	FEET **3
DISPLACEMENT (MLD.)	25794.662	L.TONS
BLOCK COEFFICIENT (MLD.)	.489223	
HALF-AREA MIDSHIP SECTION	943.033	FEET **2
MIDSHIP SECTION COEFFICIENT	.899902	
PRISMATIC COEFFICIENT (MLD.),	.543640	
TRIM	0.000	FEET
HEEL	0.000	DEGREES
VCB (FROM B.L.)	11.154	FEET
HCB (FROM C.L.)	0.000	FEET
LCB (FROM F.P.)	464.483	FEET
BM, TRANSVERSE	40.351	FEET
BM, LONGITUDINAL	2037.155	FEET
MOMENT TO ALTER TRIM 0.1 FEET	5967.942	
L.TONS PER 0.1 FEET IMMERSION	160.571	
AREA OF WATERPLANE	56199.912	FEET **2
WATERPLANE COEFFICIENT (MLD.)	.609081	
L.C.F. FROM F.P.	485.146	FEET
CHANGE IN DISPL. FOR 1 FEET TRIM AFT	-81.874	L.TONS
WETTED SURFACE (MLD.)	74780.118	FEET **2

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 14

*DRAFT(TF=25.0,TA=25.0)

HYDROSTATICS

SEA-LAND 7 CONTAINERSHIP

STATION FROM F.P.	MEAN DRAFT (FEET)	BEAM (FEET)	AREA (FEET **2)	S.A. COEF.	VCB (FEET)	HCB (FEET)
0.0000	25.0000	1.2371	221.315	7.15611	10.1345	0.0000
11.0063	25.0000	2.7957	240.054	3.43464	10.5834	0.0000
22.0125	25.0000	3.6349	256.630	2.82404	10.8701	0.0000
44.0250	25.0000	5.6422	297.549	2.10947	11.3428	0.0000
66.0375	25.0000	8.4643	337.905	1.59685	11.7431	0.0000
88.0500	25.0000	12.4288	392.083	1.26185	12.2616	0.0000
110.0625	25.0000	17.7286	449.910	1.01510	12.8474	0.0000
132.0750	25.0000	23.6643	521.539	.88156	13.3010	0.0000
176.1000	25.0000	38.4286	724.784	.75442	14.0698	0.0000
220.1250	25.0000	53.8195	991.670	.73703	14.3406	0.0000
264.1500	25.0000	68.4947	1302.378	.76057	14.2004	0.0000
308.1750	25.0000	82.3212	1644.647	.79914	13.9791	0.0000
352.2000	25.0000	93.6401	1971.733	.84226	13.6776	0.0000
396.2250	25.0000	101.4187	2232.701	.88059	13.4353	0.0000
440.2500	25.0000	105.2827	2411.574	.91623	13.2437	0.0000
484.2750	25.0000	105.5000	2456.114	.93123	13.1698	0.0000
528.3000	25.0000	105.5000	2413.895	.91522	13.2698	0.0000
572.3250	25.0000	105.1638	2311.623	.87925	13.5079	0.0000
616.3500	25.0000	103.3483	2125.938	.82282	13.9140	0.0000
660.3750	25.0000	98.4222	1831.947	.74453	14.5965	0.0000
704.4000	25.0000	87.7633	1460.500	.66565	15.3021	0.0000
748.4250	25.0000	71.9950	1034.001	.57448	16.0425	0.0000
770.4375	25.0000	62.0641	823.393	.53067	16.3995	0.0000
792.4500	25.0000	51.0864	622.209	.48718	16.7375	0.0000
814.4625	25.0000	39.3827	439.705	.44660	16.9216	0.0000
836.4750	25.0000	27.3117	220.060	.57650	19.5161	0.0000
858.4875	25.0000	14.6796	77.766	.61629	21.3996	0.0000
869.4938	25.0000	8.9211	14.674	.80864	24.0632	0.0000
880.5000	25.0000	0.0000	0.000	0.00000	25.0000	0.0000
902.5125	25.0000	0.0000	0.000	0.00000	25.0000	0.0000

HYDROSTATICS

SEA-LAND 7 CONTAINERSHIP

VOLUME (MLD.)	1191035.5	FEET **3
DISPLACEMENT (MLD.)	34029.585	L.TONS
BLOCK COEFFICIENT (MLD.)	.513923	
HALF-AREA MIDSHIP SECTION	1205.787	FEET **2
MIDSHIP SECTION COEFFICIENT	.916228	
PRISMATIC COEFFICIENT (MLD.),	.560912	
TRIM	0.000	FEET
HEEL	0.000	DEGREES
VCB (FROM B.L.)	13.905	FEET
HCB (FROM C.L.)	0.000	FEET
LCB (FROM F.P.)	470.498	FEET
BM, TRANSVERSE	33.545	FEET
BM, LONGITUDINAL	1685.981	FEET
MOMENT TO ALTER TRIM 0.1 FEET	6515.985	
L.TONS PER 0.1 FEET IMMERSION	168.859	
AREA OF WATERPLANE	59100.476	FEET **2
WATERPLANE COEFFICIENT (MLD.)	.637536	
L.C.F. FROM F.P.	492.738	FEET
CHANGE IN DISPL. FOR 1 FEET TRIM AFT	-100.658	L.TONS
WETTED SURFACE (MLD.)	84454.406	FEET **2

*DRAFT(WT=47760.0000,LCG=478.8632,KG=42.31,TITLE)

BALANCING OF SHIP

SL-7 FULL LOAD EXAMPLE

6 ITERATIONS TO BALANCE SHIP

TRIM (+ BOW UP)	=	.4170	FEET
HEEL (+ ST'BD. DOWN)	=	0.0000	DEGREES
DRAFT FOWARD	=	32.5742	FEET
DRAFT AFT	=	32.9913	FEET
WEIGHT	=	47760.0000	L.TONS
BUOYANCY	=	47760.0009	L.TONS
LCG (FROM F.P.)	=	478.8632	FEET
LCB (FROM F.P.)	=	478.8743	FEET
VCG (FROM B.L.)	=	42.3100	FEET
VCB (FROM B.L.)	=	18.2314	FEET
HCG (FROM C.L.)	=	0.0000	FEET
HCB (FROM C.L.)	=	0.0000	FEET

HYDROSTATICS

SL-7 FULL LOAD EXAMPLE

STATION FROM F.P.	MEAN DRAFT (FEET)	BEAM (FEET)	AREA (FEET **2)	S.A. COEF.	VCB (FEET)	HCB (FEET)
0.0000	32.5742	0.0000	223.395	1.00000	10.2856	0.0000
11.0063	32.5793	2.1645	255.826	3.62781	11.6946	0.0000
22.0125	32.5844	2.9784	278.628	2.87101	12.2759	0.0000
44.0250	32.5946	6.0058	338.200	1.72767	13.4474	0.0000
66.0375	32.6048	9.9183	404.721	1.25152	14.5780	0.0000
88.0500	32.6149	15.8799	496.289	.95823	15.7712	0.0000
110.0625	32.6251	21.9472	598.465	.83581	16.8453	0.0000
132.0750	32.6353	29.0407	720.398	.76011	17.6204	0.0000
176.1000	32.6556	44.8402	1043.108	.71237	18.6032	0.0000
220.1250	32.6760	60.5819	1430.740	.72275	18.8128	0.0000
264.1500	32.6963	75.1676	1855.258	.75487	18.5830	0.0000
308.1750	32.7166	87.5196	2300.360	.80338	18.2315	0.0000
352.2000	32.7370	97.0863	2709.943	.85264	17.8218	0.0000
396.2250	32.7573	103.1786	3027.153	.89565	17.4911	0.0000
440.2500	32.7777	105.4995	3231.401	.93446	17.2134	0.0000
484.2750	32.7980	105.5000	3278.806	.94758	17.1165	0.0000
528.3000	32.8184	105.5000	3238.733	.93542	17.2528	0.0000
572.3250	32.8387	105.5000	3138.135	.90580	17.5673	0.0000
616.3500	32.8591	105.5000	2948.151	.85044	18.1054	0.0000
660.3750	32.8794	103.2517	2628.041	.77412	18.9508	0.0000
704.4000	32.8997	95.5877	2187.151	.69548	19.8548	0.0000
748.4250	32.9201	83.7717	1653.008	.59940	20.9166	0.0000
770.4375	32.9303	75.5241	1371.574	.55149	21.4725	0.0000
792.4500	32.9404	61.0736	1081.683	.53767	21.9837	0.0000
814.4625	32.9506	56.3092	820.037	.44197	22.6211	0.0000
836.4750	32.9608	44.9469	506.557	.51375	25.0536	0.0000
858.4875	32.9709	32.7218	262.508	.48425	27.1063	0.0000
869.4938	32.9760	26.3021	150.434	.57137	29.1270	0.0000
880.5000	32.9811	19.2025	77.926	.60259	30.3446	0.0000
902.5125	32.9913	6.1251	7.603	.50061	32.1647	0.0000

HYDROSTATICS

SL-7 FULL LOAD EXAMPLE

VOLUME (MLD.)	1671600.0	FEET **3
DISPLACEMENT (MLD.)	47760.001	L.TONS
BLOCK COEFFICIENT (MLD.)	.549003	
HALF-AREA MIDSHIP SECTION	1615.701	FEET **2
MIDSHIP SECTION COEFFICIENT	.934464	
PRISMATIC COEFFICIENT (MLD.),	.587506	
TRIM	.417	FEET
HEEL	0.000	DEGREES
VCB (FROM B.L.)	18.231	FEET
HCB (FROM C.L.)	0.000	FEET
LCB (FROM F.P.)	478.874	FEET
BM, TRANSVERSE	26.815	FEET
BM, LONGITUDINAL	1456.157	FEET
MOMENT TO ALTER TRIM 0.1 FEET	7898.471	
L.TONS PER 0.1 FEET IMMERSION	182.938	
AREA OF WATERPLANE	64028.258	FEET **2
WATERPLANE COEFFICIENT (MLD.)	.689274	
L.C.F. FROM F.P.	500.766	FEET
CHANGE IN DISPL. FOR 1 FEET TRIM AFT	-125.731	L.TONS
WETTED SURFACE (MLD.)	99885.068	FEET **2

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 20

*GROUNDING(WTDIST=DWSL7FU,SHOAL LENGTH=5.0,SHOAL LOCATION=50.0,
SHOAL DRAFT=5.0,KG=42.31,TITLE)

WEIGHT BLOCK DATA

SL-7 FULL LOAD GROUNDING EXAMPLE

WEIGHT TYPE	BLOCK WEIGHT (L.TONS)	BLOCK LCG (FEET)	FWD END BLOCK (FEET)	AFT END BLOCK (FEET)
1	765.20	19.00	-20.00	42.00
1	1847.70	84.32	42.00	115.25
1	1205.70	143.18	115.25	167.75
1	1613.40	185.52	167.75	207.75
1	1943.60	225.50	207.75	247.75
1	2379.20	265.54	247.75	287.75
1	2305.60	305.53	287.75	327.75
1	2610.80	345.53	327.75	367.75
1	3148.70	385.52	367.75	407.75
1	3343.70	425.51	407.75	447.75
1	3299.00	467.99	447.75	492.75
1	3179.20	512.99	492.75	537.75
1	3293.30	550.00	537.75	562.75
1	3039.80	587.50	562.75	612.75
1	2661.30	635.00	612.75	652.75
1	2898.70	674.35	652.75	697.75
1	2116.10	716.10	697.75	737.75
1	1678.30	756.40	737.75	777.75
1	1597.20	795.55	777.75	817.75
1	1244.50	835.50	817.75	852.50
1	897.70	869.50	852.50	880.50
1	691.30	900.50	880.50	920.50

BLOCK TYPE	SUMMARY WEIGHT (L.TONS)	SUMMARY LCG (FEET)
1	47760.00	478.86
TOTAL	47760.00	478.86

BALANCING OF SHIP

SL-7 FULL LOAD GROUNDING EXAMPLE

6 ITERATIONS TO BALANCE SHIP

TRIM (+ BOW UP)	=	.4170	FEET
HEEL (+ ST'BD. DOWN)	=	0.0000	DEGREES
DRAFT FOWARD	=	32.5742	FEET
DRAFT AFT	=	32.9913	FEET
WEIGHT	=	47760.0000	L.TONS
BUOYANCY	=	47760.0009	L.TONS
LCG (FROM F.P.)	=	478.8632	FEET
LCB (FROM F.P.)	=	478.8743	FEET
VCG (FROM B.L.)	=	42.3100	FEET
VCB (FROM B.L.)	=	18.2314	FEET
HCG (FROM C.L.)	=	0.0000	FEET
HCB (FROM C.L.)	=	0.0000	FEET

GROUNDING OF SHIP

SL-7 FULL LOAD GROUNDING EXAMPLE

SHOAL LOCATION (FROM F.P.)	=	50.0000	FEET
SHOAL WATER DEPTH	=	5.0000	FEET
SHOAL LENGTH	=	5.0000	FEET
DRAFT FORWARD	=	2.4746	FEET
DRAFT AFT	=	48.1818	FEET
TRIM (+ BOW UP)	=	45.7072	FEET
HEEL (+ ST'BD. DOWN)	=	0.0000	DEGREES
EQUIVALENT SHOAL FORCE	=	7798.960	L.TONS
EQUIVALENT WEIGHT	=	39961.040	L.TONS
LCG (FROM F.P.)	=	562.5619	FEET
VCG (FROM B.L.)	=	50.5674	FEET
HCG (FROM C.L.)	=	0.0000	FEET
DISPLACEMENT	=	39961.065	L.TONS
LCB (FROM F.P.)	=	564.2012	FEET
VCB (FROM B.L.)	=	18.1991	FEET
HCB (FROM C.L.)	=	0.0000	FEET

SHEAR FORCE-BENDING MOMENT

SL-7 FULL LOAD GROUNDING EXAMPLE

DISTANCE FROM FP (FEET)	WEIGHT FORCE	BUOYANCY FORCE (L.TONS)	SHEAR FORCE	WEIGHT MOMENT	BUOYANCY MOMENT (FEET -L.TONS)	BENDING MOMENT
-20.00	0.	0.	0.0	0.	0.	0.0
42.00	7.652E+02	4.043E+01	724.8	1.760E+04	7.280E+02	16871.6
47.50	8.441E+02	4.880E+01	795.3	2.202E+04	9.730E+02	21047.7
52.50	-6.875E+03	5.722E+01	-6932.0	6.941E+03	1.238E+03	5702.9
115.25	-5.186E+03	2.349E+02	-5420.9	-3.781E+05	9.664E+03	-387745.9
167.75	-3.980E+03	5.227E+02	-4503.1	-6.207E+05	2.882E+04	-649543.7
207.75	-2.367E+03	8.864E+02	-3253.3	-7.441E+05	5.642E+04	-800494.0
247.75	-4.234E+02	1.458E+03	-1881.1	-7.955E+05	1.024E+05	-897913.6
287.75	1.956E+03	2.334E+03	-378.4	-7.596E+05	1.770E+05	-936645.6
327.75	4.261E+03	3.606E+03	655.6	-6.301E+05	2.944E+05	-924547.2
367.75	6.872E+03	5.332E+03	1540.0	-4.017E+05	4.716E+05	-873296.6
407.75	1.002E+04	7.519E+03	2502.3	-5.678E+04	7.271E+05	-783925.4
447.75	1.336E+04	1.013E+04	3234.4	4.184E+05	1.079E+06	-660363.2
492.75	1.666E+04	1.346E+04	3208.3	1.102E+06	1.608E+06	-506622.2
537.75	1.984E+04	1.707E+04	2776.9	1.930E+06	2.294E+06	-363864.5
562.75	2.314E+04	1.916E+04	3976.5	2.468E+06	2.747E+06	-278511.5
612.75	2.618E+04	2.346E+04	2719.1	3.702E+06	3.812E+06	-110029.4
652.75	2.884E+04	2.688E+04	1954.7	4.796E+06	4.819E+06	-22860.5
697.75	3.174E+04	3.055E+04	1189.9	6.161E+06	6.112E+06	49330.0
737.75	3.385E+04	3.348E+04	375.4	7.477E+06	7.394E+06	82802.8
777.75	3.553E+04	3.597E+04	-442.9	8.867E+06	8.785E+06	82049.7
817.75	3.713E+04	3.792E+04	-792.9	1.032E+07	1.026E+07	59015.1
852.50	3.837E+04	3.910E+04	-724.3	1.163E+07	1.160E+07	30701.9
880.50	3.927E+04	3.969E+04	-418.4	1.272E+07	1.271E+07	11310.7
920.50	3.996E+04	4.007E+04	-104.5	1.430E+07	1.430E+07	-1292.4

HYDROSTATICS

SL-7 FULL LOAD GROUNDING EXAMPLE

STATION FROM F.P.	MEAN DRAFT (FEET)	BEAM (FEET)	AREA (FEET **2)	S.A. COEF.	VCB (FEET)	HCB (FEET)
0.0000	2.4746	10.5772	16.802	.64193	1.5455	0.0000
11.0063	3.0320	11.9466	23.757	.65587	1.8670	0.0000
22.0125	3.5894	12.9897	31.586	.67744	2.1870	0.0000
44.0250	4.7042	15.1127	50.798	.71453	2.8087	0.0000
66.0375	5.8191	17.2116	74.247	.74132	3.4393	0.0000
88.0500	6.9339	19.0922	101.722	.76839	4.0388	0.0000
110.0625	8.0487	20.4409	129.904	.78958	4.5960	0.0000
132.0750	9.1635	22.1145	165.478	.81659	5.1256	0.0000
176.1000	11.3931	29.4347	264.977	.79014	6.4061	0.0000
220.1250	13.6227	42.8875	438.159	.74996	7.7974	0.0000
264.1500	15.8523	59.2952	715.762	.76148	9.0099	0.0000
308.1750	18.0820	76.6623	1093.569	.78889	10.1483	0.0000
352.2000	20.3116	90.8562	1539.092	.83400	11.1505	0.0000
396.2250	22.5412	100.5374	1984.400	.87564	12.1419	0.0000
440.2500	24.7708	105.2746	2387.445	.91552	13.1261	0.0000
484.2750	27.0004	105.5000	2667.159	.93632	14.1850	0.0000
528.3000	29.2300	105.5000	2860.165	.92749	15.4301	0.0000
572.3250	31.4597	105.5000	2992.646	.90167	16.8584	0.0000
616.3500	33.6893	105.5000	3035.741	.85412	18.5431	0.0000
660.3750	35.9189	103.7888	2942.692	.78935	20.6028	0.0000
704.4000	38.1485	98.9262	2697.632	.71481	22.8228	0.0000
748.4250	40.3781	91.9878	2308.908	.62163	25.4025	0.0000
770.4375	41.4929	86.4987	2067.665	.57610	26.8044	0.0000
792.4500	42.6078	81.2976	1781.167	.51421	28.2766	0.0000
814.4625	43.7226	74.9348	1529.136	.46672	30.0270	0.0000
836.4750	44.8374	67.6461	1180.431	.51606	33.1843	0.0000
858.4875	45.9522	60.0298	873.299	.49234	36.1865	0.0000
869.4938	46.5096	55.6105	712.498	.54419	38.1314	0.0000
880.5000	47.0670	50.7783	580.694	.54927	39.6283	0.0000
902.5125	48.1818	40.8011	372.560	.51676	42.2118	0.0000

HYDROSTATICS

SL-7 FULL LOAD GROUNDING EXAMPLE

VOLUME (MLD.)	1398637.3	FEET **3
DISPLACEMENT (MLD.)	39961.065	L.TONS
BLOCK COEFFICIENT (MLD.)	.609133	
HALF-AREA MIDSHIP SECTION	1193.722	FEET **2
MIDSHIP SECTION COEFFICIENT	.915524	
PRISMATIC COEFFICIENT (MLD.),	.665338	
TRIM	45.707	FEET
HEEL	0.000	DEGREES
VCB (FROM B.L.)	18.199	FEET
HCB (FROM C.L.)	0.000	FEET
LCB (FROM F.P.)	564.201	FEET
BM, TRANSVERSE	32.087	FEET
BM, LONGITUDINAL	1951.388	FEET
MOMENT TO ALTER TRIM 0.1 FEET	8856.278	
L.TONS PER 0.1 FEET IMMERSION	186.313	
AREA OF WATERPLANE	65209.507	FEET **2
WATERPLANE COEFFICIENT (MLD.)	.703490	
L.C.F. FROM F.P.	527.047	FEET
CHANGE IN DISPL. FOR 1 FEET TRIM AFT	-183.662	L.TONS
WETTED SURFACE (MLD.)	87031.130	FEET **2

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 27

*INTACTSTABILITY(DISPL=15000,DISP2=50000,DISPINC=5000,KG=30.,
TITLE)

INTACT STABILITY

SL-7 INTACT STABILITY EXAMPLE

HEEL = 10.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	8.101	9.537	5.590	-2.7861E-04
20000.0	9.828	8.118	4.492	-1.7236E-04
25000.0	11.502	7.112	3.792	-1.1270E-04
30000.0	13.133	6.355	3.330	-7.4874E-05
35000.0	14.726	5.763	3.024	-4.9823E-05
40000.0	16.286	5.283	2.822	-3.1656E-05
45000.0	17.814	4.893	2.703	-1.6550E-05
50000.0	19.314	4.574	2.649	-5.4137E-06

HEEL = 20.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	10.253	17.666	9.847	-3.6677E-04
20000.0	11.794	15.498	8.337	-2.4663E-04
25000.0	13.304	13.853	7.307	-1.6931E-04
30000.0	14.795	12.560	6.602	-1.1574E-04
35000.0	16.272	11.518	6.128	-7.5709E-05
40000.0	17.734	10.666	5.827	-4.6191E-05
45000.0	19.178	9.957	5.655	-2.3642E-05
50000.0	20.605	9.361	5.583	-5.8796E-06

INTACT STABILITY

SL-7 INTACT STABILITY EXAMPLE

HEEL = 30.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	13.120	23.849	12.214	-3.1785E-04
20000.0	14.596	21.537	10.950	-2.0073E-04
25000.0	16.045	19.750	10.126	-1.3260E-04
30000.0	17.472	18.306	9.590	-8.5536E-05
35000.0	18.878	17.102	9.249	-5.2131E-05
40000.0	20.264	16.078	9.055	-2.6525E-05
45000.0	21.627	15.188	8.967	-9.5441E-06
50000.0	22.967	14.404	8.958	5.5012E-06

HEEL = 40.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	16.789	29.085	13.788	-2.3957E-04
20000.0	18.230	26.720	12.903	-1.2486E-04
25000.0	19.676	24.926	12.458	-5.8241E-05
30000.0	21.104	23.484	12.272	-1.9274E-05
35000.0	22.497	22.264	12.232	3.3706E-06
40000.0	23.844	21.188	12.274	1.0961E-05
45000.0	25.091	20.144	12.276	-1.3631E-05
50000.0	26.200	19.048	12.149	-3.6887E-05

INTACT STABILITY

SL-7 INTACT STABILITY EXAMPLE

HEEL = 50.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	21.520	33.811	15.237	1.0154E-05
20000.0	23.216	31.683	15.169	-1.4586E-05
25000.0	24.635	29.869	15.089	-1.1028E-05
30000.0	25.821	28.205	14.929	-5.1676E-05
35000.0	26.783	26.577	14.619	-6.6011E-05
40000.0	27.617	24.995	14.241	-8.1972E-05
45000.0	28.365	23.450	13.821	-8.2776E-05
50000.0	29.071	21.949	13.397	-8.5519E-05

HEEL = 60.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	27.080	37.701	16.322	1.9520E-04
20000.0	28.833	35.655	16.817	1.5126E-05
25000.0	29.764	33.498	16.544	-1.0495E-04
30000.0	30.284	31.354	15.923	-1.4521E-04
35000.0	30.626	29.289	15.187	-1.4519E-04
40000.0	30.944	27.341	14.488	-1.3586E-04
45000.0	31.251	25.484	13.825	-1.3010E-04
50000.0	31.561	23.705	13.204	-1.1881E-04

INTACT STABILITY

SL-7 INTACT STABILITY EXAMPLE

HEEL = 70.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	32.311	40.164	15.909	6.7890E-05
20000.0	33.213	37.718	15.920	-4.6611E-05
25000.0	33.707	35.362	15.578	-8.3496E-05
30000.0	33.950	33.085	15.027	-1.2669E-04
35000.0	34.002	30.878	14.321	-1.5189E-04
40000.0	33.949	28.751	13.544	-1.5551E-04
45000.0	33.889	26.722	12.794	-1.4297E-04
50000.0	33.867	24.786	12.111	-1.2897E-04

HEEL = 80.00 DEGREES

CENTER OF GRAVITY FROM B.L.= 30.00 FEET ; FROM C.L.= 0.00 FEET

DISPLACEMENT (L.TONS)	CENTER OF BUOYANCY FROM B.L. (FEET)	FROM C.L. (FEET)	GZ RIGHTING ARM (FEET)	TANGENT TO CROSS CURVE (FEET /L.TONS)
15000.0	36.780	41.374	13.862	-4.8910E-05
20000.0	36.919	38.722	13.537	-7.8287E-05
25000.0	36.930	36.234	13.117	-9.0242E-05
30000.0	36.875	33.878	12.654	-9.5399E-05
35000.0	36.759	31.628	12.149	-1.0204E-04
40000.0	36.578	29.465	11.595	-1.1953E-04
45000.0	36.323	27.380	10.981	-1.2294E-04
50000.0	36.066	25.378	10.381	-1.1532E-04

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 32

*DRAFT(WTDIST=DWSL7BA,KG=40.26,WAVE=1,TITLE)

WEIGHT BLOCK DATA

SL-7 BALLAST-L/20 WAVE TROUGH AMIDSHIPS

WEIGHT TYPE	BLOCK WEIGHT (L.TONS)	BLOCK LCG (FEET)	FWD END BLOCK (FEET)	AFT END BLOCK (FEET)
1	777.40	19.00	-20.00	42.00
1	1859.90	84.32	42.00	115.25
1	1217.90	143.18	115.25	167.75
1	1151.80	185.52	167.75	207.75
1	1379.20	225.50	207.75	247.75
1	1844.30	265.54	247.75	287.75
1	1990.60	305.53	287.75	327.75
1	2429.00	345.53	327.75	367.75
1	2547.50	385.52	367.75	407.75
1	2707.60	425.51	407.75	447.75
1	2714.90	467.99	447.75	492.75
1	2697.90	512.99	492.75	537.75
1	3284.90	550.00	537.75	562.75
1	3031.40	587.50	562.75	612.75
1	2726.30	635.00	612.75	652.75
1	2757.40	674.35	652.75	697.75
1	1631.30	716.10	697.75	737.75
1	1217.70	756.40	737.75	777.75
1	982.50	795.55	777.75	817.75
1	901.20	835.50	817.75	852.50
1	889.30	869.50	852.50	880.50
1	682.90	900.50	880.50	920.50

BLOCK TYPE	SUMMARY WEIGHT (L.TONS)	SUMMARY LCG (FEET)
1	41422.90	477.68
TOTAL	41422.90	477.68

BALANCING OF SHIP

SL-7 BALLAST-L/20 WAVE TROUGH AMIDSHIPS

WAVE CHARACTERISTICS

SINUSOIDAL WAVE

CREST (FROM F.P.)(FEET)	0.00
WAVE LENGTH (FEET)	880.50
HEIGHT (CREST TO TROUGH)	44.0250
WAVE HEADING (BOW=0 DEGREES)	0.00

6 ITERATIONS TO BALANCE SHIP

TRIM (+ BOW UP)	=	-18.5919	FEET
HEEL (+ ST'BD. DOWN)	=	0.0000	DEGREES
DRAFT FOWARD	=	44.1528	FEET
DRAFT AFT	=	25.5610	FEET
WEIGHT	=	41422.9000	L.TONS
BUOYANCY	=	41422.9002	L.TONS
LCG (FROM F.P.)	=	477.6818	FEET
LCB (FROM F.P.)	=	477.2854	FEET
VCG (FROM B.L.)	=	40.2600	FEET
VCB (FROM B.L.)	=	21.0202	FEET
HCG (FROM C.L.)	=	0.0000	FEET
HCB (FROM C.L.)	=	0.0000	FEET

BALANCING OF SHIP

SL-7 BALLAST-L/20 WAVE TROUGH AMIDSHIPS

STATION FROM F.P.	MEAN WATERLINE	WAVE ELEVATION	DRAFT FROM B.L.
0.000	44.1528	22.0078	66.1607
11.006	43.9261	21.9344	65.8605
22.013	43.6994	21.7258	65.4251
44.025	43.2459	20.9093	64.1552
66.037	42.7925	19.5793	62.3718
88.050	42.3390	17.7691	60.1081
110.062	41.8855	15.5237	57.4092
132.075	41.4321	12.8985	54.3305
176.100	40.5252	6.7743	47.2995
220.125	39.6182	-0.0073	39.6109
264.150	38.7113	-6.7882	31.9231
308.175	37.8044	-12.9103	24.8941
352.200	36.8975	-17.7778	19.1197
396.225	35.9905	-20.9139	15.0767
440.250	35.0836	-22.0079	13.0758
484.275	34.1767	-20.9467	13.2300
528.300	33.2698	-17.8282	15.4415
572.325	32.3629	-12.9543	19.4086
616.350	31.4559	-6.8021	24.6538
660.375	30.5490	.0221	30.5711
704.400	29.6421	6.8441	36.4862
748.425	28.7352	12.9899	41.7251
770.437	28.2817	15.6156	43.8974
792.450	27.8283	17.8541	45.6823
814.463	27.3748	19.6502	47.0250
836.475	26.9213	20.9601	47.8815
858.487	26.4679	21.7522	48.2201
869.494	26.2411	21.9477	48.1889
880.500	26.0144	22.0077	48.0221
902.513	25.5610	21.7211	47.2820

SHEAR FORCE-BENDING MOMENT

SL-7 BALLAST-L/20 WAVE TROUGH AMIDSHIPS

DISTANCE FROM FP (FEET)	WEIGHT FORCE	BUOYANCY FORCE (L.TONS)	SHEAR FORCE	WEIGHT MOMENT	BUOYANCY MOMENT (FEET -L.TONS)	BENDING MOMENT
-20.00	0.	0.	0.0	0.	0.	0.0
42.00	7.774E+02	8.191E+02	-41.7	1.788E+04	1.516E+04	2718.7
115.25	2.637E+03	3.372E+03	-735.1	1.324E+05	1.606E+05	-28228.4
167.75	3.855E+03	5.852E+03	-1996.8	3.007E+05	4.011E+05	-100357.7
207.75	5.007E+03	7.935E+03	-2928.0	4.805E+05	6.766E+05	-196015.9
247.75	6.386E+03	1.005E+04	-3667.3	7.115E+05	1.036E+06	-324959.7
287.75	8.230E+03	1.209E+04	-3857.1	1.008E+06	1.480E+06	-471810.3
327.75	1.022E+04	1.396E+04	-3736.9	1.381E+06	2.001E+06	-619896.7
367.75	1.265E+04	1.562E+04	-2974.0	1.844E+06	2.594E+06	-749407.2
407.75	1.520E+04	1.710E+04	-1901.1	2.407E+06	3.249E+06	-841798.0
447.75	1.791E+04	1.846E+04	-558.5	3.075E+06	3.960E+06	-885166.0
492.75	2.062E+04	2.001E+04	608.9	3.948E+06	4.826E+06	-877601.0
537.75	2.332E+04	2.175E+04	1568.1	4.943E+06	5.764E+06	-821514.3
562.75	2.660E+04	2.287E+04	3736.2	5.567E+06	6.322E+06	-754121.3
612.75	2.963E+04	2.551E+04	4123.0	6.974E+06	7.529E+06	-554452.4
652.75	3.236E+04	2.803E+04	4334.9	8.208E+06	8.598E+06	-390371.8
697.75	3.512E+04	3.116E+04	3957.3	9.729E+06	9.929E+06	-200535.8
737.75	3.675E+04	3.402E+04	2725.3	1.117E+07	1.123E+07	-64468.4
777.75	3.797E+04	3.673E+04	1239.3	1.266E+07	1.265E+07	15480.2
817.75	3.895E+04	3.899E+04	-44.4	1.421E+07	1.417E+07	39796.7
852.50	3.985E+04	4.041E+04	-560.7	1.557E+07	1.555E+07	27182.8
880.50	4.074E+04	4.111E+04	-372.1	1.670E+07	1.669E+07	10529.9
920.50	4.142E+04	4.151E+04	-84.4	1.834E+07	1.834E+07	-993.1

HYDROSTATICS

SL-7 BALLAST-L/20 WAVE TROUGH AMIDSHIPS

WAVE CHARACTERISTICS

SINUSOIDAL WAVE

CREST (FROM F.P.)(FEET) 0.00
 WAVE LENGTH (FEET) 880.50
 HEIGHT (CREST TO TROUGH) 44.0250
 WAVE HEADING (BOW=0 DEGREES) 0.00

STATION FROM F.P.	MEAN DRAFT (FEET)	BEAM (FEET)	AREA (FEET **2)	S.A. COEF.	VCB (FEET)	HCB (FEET)
0.0000	66.1607	0.0000	455.036	1.00000	33.1927	0.0000
11.0063	65.8605	0.0000	584.240	1.00000	35.5853	0.0000
22.0125	65.4251	0.0000	705.129	1.00000	37.4101	0.0000
44.0250	64.1552	35.1631	939.247	.41635	38.4499	0.0000
66.0375	62.3718	41.8434	1093.302	.41891	37.3076	0.0000
88.0500	60.1081	47.6153	1323.513	.46243	36.3746	0.0000
110.0625	57.4092	51.9332	1488.593	.49929	34.7062	0.0000
132.0750	54.3305	55.1950	1618.241	.53963	32.5902	0.0000
176.1000	47.2995	60.6513	1809.434	.63073	27.8044	0.0000
220.1250	39.6109	66.8454	1871.982	.70699	22.9102	0.0000
264.1500	31.9231	74.4864	1798.446	.75634	18.1492	0.0000
308.1750	24.8941	82.2428	1638.261	.80018	13.9363	0.0000
352.2000	19.1197	90.0216	1434.038	.83317	10.5217	0.0000
396.2250	15.0767	96.3074	1249.403	.86047	8.1981	0.0000
440.2500	13.0758	101.8772	1169.043	.87758	7.0501	0.0000
484.2750	13.2300	104.0828	1216.928	.88374	7.1095	0.0000
528.3000	15.4415	103.6565	1408.098	.87972	8.3024	0.0000
572.3250	19.4086	103.6145	1725.649	.85810	10.5551	0.0000
616.3500	24.6538	103.2015	2090.196	.82152	13.7274	0.0000
660.3750	30.5711	102.0533	2393.314	.76712	17.6966	0.0000
704.4000	36.4862	97.8689	2538.161	.71080	21.9106	0.0000
748.4250	41.7251	93.2967	2438.483	.62641	26.2354	0.0000
770.4375	43.8974	88.9414	2283.067	.58476	28.3065	0.0000
792.4500	45.6823	85.5076	2041.489	.52263	30.3046	0.0000
814.4625	47.0250	80.1389	1788.365	.47455	32.2570	0.0000
836.4750	47.8815	70.6972	1394.009	.53497	35.2064	0.0000
858.4875	48.2201	63.8138	1014.420	.49964	37.7052	0.0000
869.4938	48.1889	58.5331	808.518	.54764	39.2271	0.0000
880.5000	48.0221	52.5334	629.781	.54473	40.2453	0.0000
902.5125	47.2820	38.9729	335.873	.39676	41.6095	0.0000

HYDROSTATICS

SL-7 BALLAST-L/20 WAVE TROUGH AMIDSHIPS

VOLUME (MLD.)	1449801.5	FEET **3
DISPLACEMENT (MLD.)	41422.900	L.TONS
BLOCK COEFFICIENT (MLD.)	.460678	
HALF-AREA MIDSHIP SECTION	584.522	FEET **2
MIDSHIP SECTION COEFFICIENT	.327076	
PRISMATIC COEFFICIENT (MLD.),	1.408473	
TRIM	-18.592	FEET
HEEL	0.000	DEGREES
VCB (FROM B.L.)	21.020	FEET
HCB (FROM C.L.)	0.000	FEET
LCB (FROM F.P.)	477.285	FEET
BM, TRANSVERSE	32.536	FEET
BM, LONGITUDINAL	2442.681	FEET
MOMENT TO ALTER TRIM 0.1 FEET	11491.531	
L.TONS PER 0.1 FEET IMMERSION	203.421	
AREA OF WATERPLANE	71197.454	FEET **2
WATERPLANE COEFFICIENT (MLD.)	.793703	
L.C.F. FROM F.P.	497.118	FEET
CHANGE IN DISPL. FOR 1 FEET TRIM AFT	-131.382	L.TONS
WETTED SURFACE (MLD.)	108160.717	FEET **2

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 39

*DRAFT(WTDIST=DWSL7FU,KG=42.31,TITLE,EQUALSTATION=21,
POINTS=19,LIST)

WEIGHT BLOCK DATA

SL-7 - NORMAL FULL LOAD DEPARTURE

WEIGHT TYPE	BLOCK WEIGHT (L.TONS)	BLOCK LCG (FEET)	FWD END BLOCK (FEET)	AFT END BLOCK (FEET)
1	765.20	19.00	-20.00	42.00
1	1847.70	84.32	42.00	115.25
1	1205.70	143.18	115.25	167.75
1	1613.40	185.52	167.75	207.75
1	1943.60	225.50	207.75	247.75
1	2379.20	265.54	247.75	287.75
1	2305.60	305.53	287.75	327.75
1	2610.80	345.53	327.75	367.75
1	3148.70	385.52	367.75	407.75
1	3343.70	425.51	407.75	447.75
1	3299.00	467.99	447.75	492.75
1	3179.20	512.99	492.75	537.75
1	3293.30	550.00	537.75	562.75
1	3039.80	587.50	562.75	612.75
1	2661.30	635.00	612.75	652.75
1	2898.70	674.35	652.75	697.75
1	2116.10	716.10	697.75	737.75
1	1678.30	756.40	737.75	777.75
1	1597.20	795.55	777.75	817.75
1	1244.50	835.50	817.75	852.50
1	897.70	869.50	852.50	880.50
1	691.30	900.50	880.50	920.50

BLOCK TYPE	SUMMARY WEIGHT (L.TONS)	SUMMARY LCG (FEET)
1	47760.00	478.86
TOTAL	47760.00	478.86

BALANCING OF SHIP

SL-7 - NORMAL FULL LOAD DEPARTURE

6 ITERATIONS TO BALANCE SHIP

TRIM (+ BOW UP)	=	.4170	FEET
HEEL (+ ST'BD. DOWN)	=	0.0000	DEGREES
DRAFT FOWARD	=	32.5742	FEET
DRAFT AFT	=	32.9913	FEET
WEIGHT	=	47760.0000	L.TONS
BUOYANCY	=	47760.0009	L.TONS
LCG (FROM F.P.)	=	478.8632	FEET
LCB (FROM F.P.)	=	478.8743	FEET
VCG (FROM B.L.)	=	42.3100	FEET
VCB (FROM B.L.)	=	18.2314	FEET
HCG (FROM C.L.)	=	0.0000	FEET
HCB (FROM C.L.)	=	0.0000	FEET

SHEAR FORCE-BENDING MOMENT

SL-7 - NORMAL FULL LOAD DEPARTURE

DISTANCE FROM FP (FEET)	WEIGHT FORCE	BUOYANCY FORCE (L.TONS)	SHEAR FORCE	WEIGHT MOMENT	BUOYANCY MOMENT (FEET -L.TONS)	BENDING MOMENT
-20.00	0.	0.	0.0	0.	0.	0.0
42.00	7.652E+02	3.340E+02	431.2	1.760E+04	6.573E+03	11026.7
115.25	2.613E+03	1.306E+03	1307.3	1.308E+05	6.285E+04	67950.8
167.75	3.819E+03	2.497E+03	1321.4	2.976E+05	1.603E+05	137305.2
207.75	5.432E+03	3.808E+03	1623.9	4.862E+05	2.851E+05	201125.6
247.75	7.376E+03	5.529E+03	1846.4	7.467E+05	4.704E+05	276344.3
287.75	9.755E+03	7.693E+03	2061.8	1.095E+06	7.333E+05	361279.6
327.75	1.206E+04	1.031E+04	1747.6	1.536E+06	1.092E+06	444065.9
367.75	1.467E+04	1.336E+04	1315.8	2.076E+06	1.564E+06	512438.9
407.75	1.782E+04	1.674E+04	1079.4	2.733E+06	2.165E+06	568383.4
447.75	2.116E+04	2.036E+04	799.2	3.520E+06	2.906E+06	614102.3
492.75	2.446E+04	2.456E+04	-96.0	4.555E+06	3.917E+06	637573.8
537.75	2.764E+04	2.874E+04	-1094.4	5.734E+06	5.116E+06	617744.9
562.75	3.094E+04	3.101E+04	-78.6	6.467E+06	5.863E+06	603821.2
612.75	3.397E+04	3.540E+04	-1424.0	8.091E+06	7.525E+06	565789.0
652.75	3.664E+04	3.863E+04	-1995.1	9.497E+06	9.006E+06	490320.0
697.75	3.953E+04	4.182E+04	-2281.4	1.121E+07	1.082E+07	394579.5
737.75	4.165E+04	4.413E+04	-2478.3	1.284E+07	1.254E+07	301052.0
777.75	4.333E+04	4.588E+04	-2551.4	1.454E+07	1.434E+07	200788.0
817.75	4.493E+04	4.705E+04	-2121.8	1.631E+07	1.620E+07	108959.6
852.50	4.617E+04	4.758E+04	-1410.8	1.789E+07	1.785E+07	45830.1
880.50	4.707E+04	4.773E+04	-664.4	1.920E+07	1.918E+07	13610.5
920.50	4.776E+04	4.776E+04	-2.0	2.109E+07	2.109E+07	-24.4

HYDROSTATICS

SL-7 - NORMAL FULL LOAD DEPARTURE

STATION FROM F.P.	MEAN DRAFT (FEET)	BEAM (FEET)	AREA (FEET **2)	S.A. COEF.	VCB (FEET)	HCB (FEET)
0.0000	32.5742	0.0000	222.324	1.00000	10.3399	0.0000
44.0250	32.5946	6.0058	337.029	1.72169	13.5029	0.0000
88.0500	32.6149	15.8799	495.892	.95747	15.7963	0.0000
132.0750	32.6353	29.0407	719.110	.75875	17.6561	0.0000
176.1000	32.6556	44.8402	1042.186	.71174	18.6209	0.0000
220.1250	32.6760	60.5819	1429.338	.72204	18.8262	0.0000
264.1500	32.6963	75.1676	1853.956	.75434	18.5905	0.0000
308.1750	32.7166	87.5196	2298.444	.80271	18.2403	0.0000
352.2000	32.7370	97.0863	2706.108	.85143	17.8344	0.0000
396.2250	32.7573	103.1786	3023.046	.89443	17.5044	0.0000
440.2500	32.7777	105.4995	3226.899	.93316	17.2270	0.0000
484.2750	32.7980	105.5000	3273.375	.94601	17.1344	0.0000
528.3000	32.8184	105.5000	3235.228	.93441	17.2624	0.0000
572.3250	32.8387	105.5000	3134.283	.90469	17.5758	0.0000
616.3500	32.8591	105.5000	2944.349	.84934	18.1117	0.0000
660.3750	32.8794	103.2517	2625.787	.77346	18.9552	0.0000
704.4000	32.8997	95.5877	2185.048	.69481	19.8611	0.0000
748.4250	32.9201	83.7717	1651.807	.59896	20.9230	0.0000
792.4500	32.9404	61.0736	1080.407	.53704	21.9932	0.0000
836.4750	32.9608	44.9469	506.188	.51337	25.0663	0.0000
880.5000	32.9811	19.2025	77.919	.60254	30.3453	0.0000

VOLUME (MLD.)	1670224.0	FEET **3
DISPLACEMENT (MLD.)	47720.685	L.TONS
BLOCK COEFFICIENT (MLD.)	.548551	
HALF-AREA MIDSHIP SECTION	1613.449	FEET **2
MIDSHIP SECTION COEFFICIENT	.933162	
PRISMATIC COEFFICIENT (MLD.),	.587841	
TRIM	.417	FEET
HEEL	0.000	DEGREES
VCB (FROM B.L.)	18.240	FEET
HCB (FROM C.L.)	0.000	FEET
LCB (FROM F.P.)	478.373	FEET
BM, TRANSVERSE	26.813	FEET
BM, LONGITUDINAL	1456.486	FEET
MOMENT TO ALTER TRIM 0.1 FEET	7893.755	
L.TONS PER 0.1 FEET IMMERSION	182.368	
AREA OF WATERPLANE	63828.925	FEET **2
WATERPLANE COEFFICIENT (MLD.)	.687128	
L.C.F. FROM F.P.	496.493	FEET
CHANGE IN DISPL. FOR 1 FEET TRIM AFT	-116.490	L.TONS
WETTED SURFACE (MLD.)	99185.360	FEET **2

WET OFFSETS TABLE (FEET)

SL-7 - NORMAL FULL LOAD DEPARTURE

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 1

19 POINTS

X = 0.000

STATION 2

20 POINTS

X = 44.025

STATION 3

20 POINTS

X = 88.050

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	-3.047	0.000	1	0.000	0.000
2	-4.973	.170	2	0.000	3.003
3	-6.882	.435	3	-2.112	2.687
4	-8.751	.930	4	-4.237	2.564
5	-10.592	1.512	5	-6.372	2.606
6	-12.411	2.168	6	-8.475	2.976
7	-14.189	2.925	7	-10.538	3.500
8	-15.952	3.717	8	-12.552	4.210
9	-17.679	4.586	9	-14.506	5.067
10	-19.401	5.466	10	-16.451	5.949
11	-21.172	6.240	11	-18.418	6.781
12	-23.022	6.796	12	-20.407	7.556
13	-24.925	7.062	13	-22.479	8.045
14	-26.837	6.835	14	-24.604	8.227
15	-28.687	6.284	15	-26.708	7.949
16	-30.220	5.172	16	-28.692	7.175
17	-31.397	3.664	17	-30.325	5.845
18	-32.070	1.866	18	-31.565	4.127
19	-32.574	.000	19	-32.139	2.086
			20	-32.595	.000

STATION 4

20 POINTS

X = 132.075

STATION 5

20 POINTS

X = 176.100

STATION 6

20 POINTS

X = 220.125

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000
2	0.000	14.520	2	0.000	22.420
3	-2.053	13.616	3	-2.203	21.450
4	-4.150	12.830	4	-4.426	20.527
5	-6.294	12.169	5	-6.662	19.635
6	-8.471	11.626	6	-8.879	18.697
7	-10.674	11.242	7	-11.149	17.904
8	-12.909	11.045	8	-13.450	17.195
9	-15.151	11.100	9	-15.750	16.485
10	-17.393	11.179	10	-18.051	15.776
11	-19.634	11.277	11	-20.341	15.034
12	-21.876	11.305	12	-22.647	14.351
13	-24.057	10.872	13	-24.859	13.406
14	-26.267	10.594	14	-27.009	12.331
15	-28.296	9.669	15	-28.995	10.976
16	-30.021	8.256	16	-30.625	9.219
17	-31.435	6.527	17	-31.756	7.113
18	-32.185	4.439	18	-32.402	4.797
19	-32.584	2.243	19	-32.583	2.406
20	-32.635	.000	20	-32.656	.000

WET OFFSETS TABLE (FEET)

SL-7 - NORMAL FULL LOAD DEPARTURE

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 7

20 POINTS

X = 264.150

STATION 8

20 POINTS

X = 308.175

STATION 9

20 POINTS

X = 352.200

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000
2	0.000	37.584	2	0.000	43.760
3	-2.776	36.361	3	-3.229	42.707
4	-5.574	35.192	4	-6.450	41.629
5	-8.339	33.947	5	-9.636	40.450
6	-11.092	32.674	6	-12.803	39.225
7	-13.820	31.353	7	-15.848	37.722
8	-16.474	29.885	8	-18.761	35.978
9	-19.025	28.245	9	-21.460	33.927
10	-21.527	26.532	10	-24.017	31.698
11	-23.961	24.731	11	-26.277	29.166
12	-26.202	22.690	12	-28.207	26.373
13	-28.036	20.276	13	-29.834	23.406
14	-29.650	17.714	14	-31.072	20.244
15	-30.947	14.972	15	-31.917	16.958
16	-31.897	12.098	16	-32.213	13.574
17	-32.229	9.083	17	-32.428	10.186
18	-32.476	6.062	18	-32.524	6.790
19	-32.586	3.031	19	-32.620	3.395
20	-32.696	.000	20	-32.717	.000

STATION 10

20 POINTS

X = 396.225

STATION 11

20 POINTS

X = 440.250

STATION 12

20 POINTS

X = 484.275

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000
2	0.000	51.589	2	0.000	52.750
3	-4.010	51.215	3	-4.235	52.704
4	-7.998	50.667	4	-8.470	52.629
5	-11.957	49.931	5	-12.699	52.402
6	-15.835	48.863	6	-16.880	51.765
7	-19.573	47.370	7	-20.902	50.452
8	-23.082	45.400	8	-24.645	48.498
9	-26.159	42.812	9	-27.688	45.558
10	-28.565	39.583	10	-29.990	42.040
11	-30.344	36.005	11	-31.360	38.055
12	-31.496	32.159	12	-32.023	33.875
13	-32.052	28.181	13	-32.182	29.643
14	-32.215	24.158	14	-32.267	25.409
15	-32.305	20.131	15	-32.352	21.174
16	-32.396	16.105	16	-32.437	16.939
17	-32.486	12.079	17	-32.522	12.704
18	-32.577	8.053	18	-32.608	8.470
19	-32.667	4.026	19	-32.693	4.235
20	-32.757	.000	20	-32.778	.000

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 46

WET OFFSETS TABLE (FEET)

SL-7 - NORMAL FULL LOAD DEPARTURE

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 13
20 POINTS
X = 528.300STATION 14
20 POINTS
X = 572.325STATION 15
20 POINTS
X = 616.350

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1 0.000	0.000	1 0.000	0.000	1 0.000	0.000
2 0.000	52.750	2 0.000	52.750	2 0.000	52.750
3 -4.239	52.750	3 -4.116	52.736	3 -3.919	52.367
4 -8.478	52.750	4 -8.226	52.548	4 -7.799	51.687
5 -12.714	52.624	5 -12.305	52.015	5 -11.598	50.670
6 -16.895	51.956	6 -16.302	51.046	6 -15.223	49.146
7 -20.923	50.672	7 -20.049	49.355	7 -18.527	47.028
8 -24.650	48.661	8 -23.359	46.923	8 -21.582	44.550
9 -27.631	45.655	9 -26.220	43.975	9 -24.194	41.601
10 -29.814	42.043	10 -28.460	40.527	10 -26.405	38.348
11 -31.263	38.068	11 -30.143	36.789	11 -28.212	34.851
12 -32.001	33.894	12 -31.326	32.855	12 -29.694	31.203
13 -32.224	29.667	13 -32.002	28.794	13 -30.819	27.427
14 -32.309	25.429	14 -32.342	24.693	14 -31.613	23.577
15 -32.394	21.191	15 -32.428	20.577	15 -32.158	19.676
16 -32.479	16.952	16 -32.510	16.462	16 -32.535	15.755
17 -32.564	12.714	17 -32.592	12.346	17 -32.616	11.816
18 -32.649	8.476	18 -32.674	8.231	18 -32.697	7.878
19 -32.733	4.238	19 -32.757	4.115	19 -32.778	3.939
20 -32.818	.000	20 -32.839	.000	20 -32.859	.000

STATION 16
20 POINTS
X = 660.375STATION 17
20 POINTS
X = 704.400STATION 18
20 POINTS
X = 748.425

HEIGHT Z	H-B Y	HEIGHT Z	H-B Y	HEIGHT Z	H-B Y
1 0.000	0.000	1 0.000	0.000	1 0.000	0.000
2 0.000	51.626	2 0.000	47.794	2 0.000	41.886
3 -3.596	50.672	3 -3.122	46.480	3 -2.495	40.181
4 -7.130	49.509	4 -6.136	44.933	4 -4.938	38.402
5 -10.553	48.058	5 -9.029	43.173	5 -7.312	36.535
6 -13.766	46.195	6 -11.813	41.245	6 -9.577	34.534
7 -16.694	43.900	7 -14.403	39.075	7 -11.736	32.421
8 -19.363	41.307	8 -16.801	36.684	8 -13.824	30.239
9 -21.803	38.502	9 -19.007	34.112	9 -15.791	27.944
10 -23.921	35.446	10 -20.970	31.360	10 -17.671	25.579
11 -25.797	32.232	11 -22.791	28.503	11 -19.499	23.173
12 -26.915	28.715	12 -24.317	25.481	12 -21.188	20.667
13 -27.753	25.089	13 -25.815	22.443	13 -22.921	18.191
14 -29.678	22.015	14 -27.152	19.333	14 -24.402	15.559
15 -30.617	18.413	15 -28.407	16.186	15 -25.978	12.981
16 -31.467	14.793	16 -29.667	13.041	16 -27.478	10.358
17 -32.105	11.127	17 -30.726	9.823	17 -29.012	7.755
18 -32.466	7.423	18 -31.665	6.570	18 -30.654	5.218
19 -32.828	3.719	19 -32.689	3.348	19 -32.516	2.849
20 -32.879	.000	20 -32.900	.000	20 -32.920	.000

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 47

WET OFFSETS TABLE (FEET)

SL-7 - NORMAL FULL LOAD DEPARTURE

LENGTH = 880.500

BEAM = 105.500

DEPTH = 64.305

STATION 19

20 POINTS

X = 792.450

STATION 20

20 POINTS

X = 836.475

STATION 21

20 POINTS

X = 880.500

	HEIGHT Z	H-B Y		HEIGHT Z	H-B Y		HEIGHT Z	H-B Y
1	0.000	0.000	1	0.000	0.000	1	0.000	0.000
2	0.000	30.537	2	0.000	22.473	2	0.000	9.601
3	-2.521	30.290	3	-1.198	21.116	3	-.439	9.087
4	-4.589	29.022	4	-2.388	19.750	4	-.885	8.579
5	-6.380	27.139	5	-3.581	18.388	5	-1.331	8.071
6	-8.198	25.282	6	-4.802	17.050	6	-1.777	7.562
7	-10.019	23.427	7	-6.023	15.713	7	-2.223	7.054
8	-11.756	21.494	8	-7.258	14.389	8	-2.669	6.546
9	-13.513	19.579	9	-8.512	13.082	9	-3.115	6.038
10	-15.393	17.785	10	-9.765	11.775	10	-3.563	5.532
11	-17.169	15.895	11	-11.138	10.596	11	-4.019	5.032
12	-18.782	13.857	12	-12.537	9.447	12	-4.475	4.533
13	-20.429	11.847	13	-13.960	8.327	13	-4.931	4.034
14	-22.185	9.933	14	-15.408	7.239	14	-5.387	3.534
15	-23.992	8.066	15	-16.881	6.190	15	-5.842	3.035
16	-25.862	6.263	16	-18.452	5.288	16	-6.298	2.535
17	-27.805	4.537	17	-20.026	4.393	17	-6.734	2.028
18	-30.004	3.163	18	-21.585	3.494	18	-6.734	1.352
19	-32.379	2.128	19	-21.937	1.811	19	-6.734	.676
20	-32.940	.000	20	-21.937	.000	20	-6.734	.000

-LONGITUDINAL LIMITS OF WETTED HULL..

WATERLINE -- FWD = 32.574
WET HULL -- FWD = 0.000

WATERLINE -- AFT = 32.991
WET HULL -- AFT = 902.513

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 48

*COEFFICIENT(FIRSTSTATION=1, LASTSTATION=1)

SL-7 - NORMAL FULL LOAD DEPARTURE
FRANK CLOSE FIT -19 POINTS

STATION 1
DRAFT = 32.574 FEET

ENDPOINTS OF SEGMENTS			SEGMENT MIDPOINTS		SINE	COSINE	MOMENT
H-BRDTH	HEIGHT	LENGTH	H-BRDTH	HEIGHT			
.000	-32.574	1.933	.933	-32.322	.2609	.9654	-7.532
1.866	-32.070	1.919	2.765	-31.734	.3505	.9366	-8.533
3.664	-31.397	1.914	4.418	-30.808	.6153	.7883	-15.474
5.172	-30.220	1.894	5.728	-29.453	.8096	.5870	-20.484
6.284	-28.687	1.930	6.559	-27.762	.9584	.2855	-24.733
6.835	-26.837	1.925	6.948	-25.881	.9930	.1180	-24.880
7.062	-24.925	1.922	6.929	-23.974	.9904	-.1384	-24.702
6.796	-23.022	1.932	6.518	-22.097	.9577	-.2879	-23.038
6.240	-21.172	1.933	5.853	-20.286	.9164	-.4003	-20.933
5.466	-19.401	1.933	5.026	-18.540	.8905	-.4550	-18.796
4.586	-17.679	1.933	4.152	-16.816	.8933	-.4495	-16.887
3.717	-15.952	1.933	3.321	-15.071	.9122	-.4098	-15.108
2.925	-14.189	1.932	2.547	-13.300	.9201	-.3916	-13.235
2.168	-12.411	1.933	1.840	-11.502	.9405	-.3397	-11.443
1.512	-10.592	1.931	1.221	-9.672	.9535	-.3014	-9.590
.930	-8.751	1.933	.682	-7.816	.9668	-.2555	-7.731
.435	-6.882	1.927	.303	-5.927	.9904	-.1379	-5.912
.170	-4.973	1.933	.085	-4.010	.9961	-.0877	-4.002
0.000	-3.047						

FREQ.	A'	N'	M	N	M	N	I	N
PARAM.	33	Z	S	S	S.R	S.R	R	R
.00	INFINITY	0.000	.730	0.000	13.09	0.00	249.2	0.0
.01	.134	-.000	.731	.000	13.11	.00	249.2	.0
.03	.135	-.000	.738	.000	13.22	.00	251.3	.0
.06	.135	.000	.748	.001	13.41	.01	254.6	.3
.10	.137	.000	.762	.003	13.66	.05	259.2	1.0
.15	.138	.001	.780	.007	13.98	.14	264.9	2.6
.21	.140	.001	.800	.017	14.33	.32	271.1	5.9
.28	.141	.003	.820	.034	14.67	.62	277.0	11.6
.36	.142	.005	.835	.060	14.93	1.11	281.3	20.5
.45	.143	.008	.842	.098	15.03	1.79	282.5	33.0
.55	.142	.011	.837	.147	14.88	2.67	279.2	48.8
.67	.140	.016	.813	.208	14.41	3.76	269.8	68.2
.82	.137	.021	.765	.279	13.50	5.00	252.6	89.8
1.01	.132	.027	.693	.349	12.17	6.17	228.1	109.5
1.25	.125	.032	.608	.400	10.64	6.97	200.5	121.8
1.55	.118	.035	.527	.422	9.21	7.21	175.6	123.3
1.95	.111	.034	.458	.411	8.06	6.83	156.5	113.7
2.45	.107	.029	.413	.373	7.38	5.97	146.2	96.2
3.05	.105	.022	.392	.320	7.11	4.92	143.4	75.9
3.80	.106	.014	.386	.259	7.13	3.79	145.5	55.5
4.70	.107	.008	.392	.200	7.32	2.77	150.2	38.4
5.80	.110	.004	.404	.148	7.59	1.93	155.7	25.1
7.10	.112	.002	.418	.107	7.87	1.31	160.9	16.0
8.70	.113	.001	.432	.073	8.12	.85	165.3	9.9
10.70	.117	0.000	.499	0.000	9.17	0.00	181.6	0.0

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 50

*COEFFICIENT(FIRSTSTATION=11, LASTSTATION=11, LIST)

MAPPING STATION 11

SL-7 - NORMAL FULL LOAD DEPARTURE

VALUES PRINTED ARE FOR 8 ITERATIONS
3 MAPPING COEFFICIENTS

A(0) = 47.0731651

A(1) = -10.1726039

A(3) = -4.3511423

POINT	ORIGINAL WETTED OFFSETS		MAPPED WETTED OFFSETS		MAPPED ANGLE
	H-BRDTH	HEIGHT	H-BRDTH	HEIGHT	THETA
1	.0000	-32.7777	.0000	-32.5494	0.0000
2	2.1174	-32.7351	2.1060	-32.5504	.0300
3	4.2348	-32.6926	4.2200	-32.5533	.0601
4	6.3522	-32.6501	6.3346	-32.5578	.0904
5	8.4696	-32.6075	8.4602	-32.5632	.1211
6	10.5870	-32.5650	10.5908	-32.5686	.1521
7	12.7043	-32.5224	12.7272	-32.5727	.1836
8	14.8217	-32.4799	14.8649	-32.5740	.2155
9	16.9391	-32.4374	17.0087	-32.5701	.2482
10	19.0565	-32.3948	19.1540	-32.5585	.2815
11	21.1739	-32.3523	21.2953	-32.5358	.3155
12	23.2913	-32.3097	23.4282	-32.4978	.3504
13	25.4087	-32.2672	25.5459	-32.4397	.3861
14	27.5261	-32.2247	27.6394	-32.3556	.4227
15	29.6435	-32.1821	29.6973	-32.2390	.4602
16	31.7590	-32.1026	31.7379	-32.0798	.4991
17	33.8745	-32.0232	33.7156	-31.8715	.5387
18	35.9647	-31.6915	35.8296	-31.5712	.5837
19	38.0549	-31.3598	37.8442	-31.1850	.6297
20	39.0511	-31.0173	38.9342	-30.9234	.6501
21	40.0472	-30.6747	39.9865	-30.6272	.6829
22	41.0434	-30.3322	40.9941	-30.2955	.7098
23	42.0395	-29.9896	41.9529	-29.9276	.7367
24	43.7987	-28.8386	43.9607	-28.9429	.7986
25	45.5579	-27.6876	45.6902	-27.7663	.8596
26	47.0279	-26.1662	47.2571	-26.2925	.9241
27	48.4980	-24.6447	48.5217	-24.6566	.9857
28	49.4752	-22.7734	49.5694	-22.8155	1.0468
29	50.4523	-20.9021	50.3902	-20.8760	1.1045
30	51.1084	-18.8910	51.0322	-18.8633	1.1594
31	51.7646	-16.8799	51.5321	-16.8046	1.2116
32	52.0833	-14.7892	51.9161	-14.7429	1.2608
33	52.4020	-12.6986	52.2150	-12.6546	1.3084
34	52.5156	-10.5845	52.4430	-10.5710	1.3540
35	52.6291	-8.4703	52.6160	-8.4687	1.3987
36	52.6664	-6.3528	52.7421	-6.3623	1.4423
37	52.7037	-4.2354	52.8281	-4.2470	1.4855
38	52.7267	-2.1177	52.8782	-2.1241	1.5282
39	52.7497	0.0000	52.8946	-.0000	1.5708

AVERAGE ERROR = .41483 PERCENT OF DRAFT
STD. DEV. ERROR = .22431 PERCENT OF DRAFT

SL-7 - NORMAL FULL LOAD DEPARTURE
CONFORMAL MAPPING - 3 COEFFICIENTS

STATION 11
DRAFT = 32.778 FEET

ENDPOINTS OF SEGMENTS			SEGMENT MIDPOINTS		SINE	COSINE	MOMENT
H-BRDTH	HEIGHT	LENGTH	H-BRDTH	HEIGHT			
.000	-32.778	4.236	2.117	-32.735	.0201	.9998	1.459
4.235	-32.693	4.236	6.352	-32.650	.0201	.9998	5.695
8.470	-32.608	4.236	10.587	-32.565	.0201	.9998	9.931
12.704	-32.522	4.236	14.822	-32.480	.0201	.9998	14.166
16.939	-32.437	4.236	19.057	-32.395	.0201	.9998	18.402
21.174	-32.352	4.236	23.291	-32.310	.0201	.9998	22.638
25.409	-32.267	4.236	27.526	-32.225	.0201	.9998	26.873
29.643	-32.182	4.234	31.759	-32.103	.0375	.9993	30.531
33.875	-32.023	4.233	35.965	-31.691	.1567	.9876	30.553
38.055	-31.360	2.107	39.051	-31.017	.3252	.9457	26.843
40.047	-30.675	2.107	41.043	-30.332	.3252	.9457	28.949
42.040	-29.990	4.205	43.799	-28.839	.5475	.8368	20.862
45.558	-27.688	4.231	47.028	-26.166	.7192	.6949	13.860
48.498	-24.645	4.222	49.475	-22.773	.8864	.4629	2.714
50.452	-20.902	4.231	51.108	-18.891	.9507	.3102	-2.107
51.765	-16.880	4.230	52.083	-14.789	.9886	.1507	-6.771
52.402	-12.699	4.234	52.516	-10.584	.9986	.0536	-7.752
52.629	-8.470	4.236	52.666	-6.353	.9998	.0176	-5.424
52.704	-4.235	4.236	52.727	-2.118	.9999	.0109	-1.545
52.750	0.000						

FREQ.	A'	N'	M	N	M	N	I	N
PARAM.	33	Z	S	S	S.R	S.R	R	R
.00	INFINITY	0.000	1.978	0.000	-17.06	0.00	829.2	0.0
.01	11.980	.893	2.014	.000	-17.40	-.00	832.7	.0
.03	8.441	1.362	2.103	.004	-18.23	-.05	841.0	.6
.06	6.426	1.670	2.243	.022	-19.51	-.25	853.3	3.0
.10	5.144	1.850	2.420	.077	-20.97	-.87	865.7	9.9
.15	4.296	1.927	2.578	.207	-21.93	-2.22	870.3	23.9
.21	3.733	1.922	2.616	.436	-21.39	-4.42	857.7	45.0
.28	3.369	1.849	2.444	.744	-18.72	-7.06	824.9	67.1
.36	3.153	1.726	2.076	1.051	-14.50	-9.23	781.7	81.3
.45	3.047	1.565	1.627	1.278	-10.13	-10.29	743.3	83.0
.55	3.026	1.383	1.212	1.403	-6.67	-10.25	718.1	74.9
.67	3.072	1.176	.858	1.445	-4.25	-9.38	705.3	60.8
.82	3.179	.949	.579	1.419	-2.88	-7.92	703.4	44.0
1.01	3.340	.717	.379	1.340	-2.48	-6.13	709.2	27.8
1.25	3.535	.501	.255	1.222	-2.81	-4.28	719.1	14.7
1.55	3.737	.324	.192	1.082	-3.61	-2.61	729.6	6.0
1.95	3.937	.184	.177	.917	-4.65	-1.13	739.4	1.4
2.45	4.104	.096	.198	.755	-5.67	-.15	746.0	.0
3.05	4.231	.047	.240	.606	-6.51	.38	750.2	.2
3.80	4.329	.021	.292	.474	-7.16	.60	752.8	.8
4.70	4.400	.009	.346	.364	-7.62	.60	754.4	1.0
5.80	4.454	.004	.397	.276	-7.92	.51	755.7	.9
7.10	4.493	.002	.442	.209	-8.11	.39	756.6	.7
8.70	4.525	.001	.481	.155	-8.24	.27	757.4	.5
10.70	4.549	.000	.514	.115	-8.34	.18	758.1	.3

PROGRAM STATIC (05/79)

07/10/79

10.50.30

PAGE 53

*COEFFICIENT(FIRSTSTATION=11, LASTSTATION=11, FRANK)

SL-7 - NORMAL FULL LOAD DEPARTURE
FRANK CLOSE FIT -20 POINTS

STATION 11
DRAFT = 32.778 FEET

ENDPOINTS OF SEGMENTS			SEGMENT MIDPOINTS		SINE	COSINE	MOMENT
H-BRDTH	HEIGHT	LENGTH	H-BRDTH	HEIGHT			
.000	-32.778	4.236	2.117	-32.735	.0201	.9998	1.459
4.235	-32.693	4.236	6.352	-32.650	.0201	.9998	5.695
8.470	-32.608	4.236	10.587	-32.565	.0201	.9998	9.931
12.704	-32.522	4.236	14.822	-32.480	.0201	.9998	14.166
16.939	-32.437	4.236	19.057	-32.395	.0201	.9998	18.402
21.174	-32.352	4.236	23.291	-32.310	.0201	.9998	22.638
25.409	-32.267	4.236	27.526	-32.225	.0201	.9998	26.873
29.643	-32.182	4.234	31.759	-32.103	.0375	.9993	30.531
33.875	-32.023	4.233	35.965	-31.691	.1567	.9876	30.553
38.055	-31.360	4.214	40.047	-30.675	.3252	.9457	27.896
42.040	-29.990	4.205	43.799	-28.839	.5475	.8368	20.862
45.558	-27.688	4.231	47.028	-26.166	.7192	.6949	13.860
48.498	-24.645	4.222	49.475	-22.773	.8864	.4629	2.714
50.452	-20.902	4.231	51.108	-18.891	.9507	.3102	-2.107
51.765	-16.880	4.230	52.083	-14.789	.9886	.1507	-6.771
52.402	-12.699	4.234	52.516	-10.584	.9986	.0536	-7.752
52.629	-8.470	4.236	52.666	-6.353	.9998	.0176	-5.424
52.704	-4.235	4.236	52.727	-2.118	.9999	.0109	-1.545
52.750	0.000	52.750	26.375	0.000	0.0000	-1.0000	-26.375
0.000	0.000						

FREQ.	A'	N'	M	N	M	N	I	N
PARAM.	33	Z	S	S	S.R	S.R	R	R
.00	INFINITY	0.000	2.034	0.000	-17.19	0.00	851.9	0.0
.01	12.004	.878	2.039	.000	-17.50	-.00	846.1	.0
.03	8.497	1.347	2.128	.004	-18.32	-.05	854.0	.5
.06	6.487	1.655	2.270	.022	-19.57	-.25	865.5	2.9
.10	5.206	1.836	2.448	.078	-20.98	-.87	876.8	9.6
.15	4.357	1.913	2.606	.209	-21.87	-2.20	880.2	23.0
.21	3.791	1.907	2.643	.439	-21.26	-4.37	867.0	43.0
.28	3.426	1.834	2.470	.749	-18.55	-6.94	834.8	63.5
.36	3.209	1.709	2.101	1.056	-14.34	-9.02	793.3	76.0
.45	3.103	1.546	1.651	1.285	-10.03	-9.99	757.1	76.5
.55	3.083	1.361	1.234	1.412	-6.63	-9.87	733.9	67.8
.67	3.130	1.151	.877	1.456	-4.27	-8.93	723.0	53.6
.82	3.241	.920	.594	1.431	-2.97	-7.39	722.3	37.2
1.01	3.406	.684	.392	1.350	-2.63	-5.53	728.9	21.9
1.25	3.606	.465	.264	1.231	-3.02	-3.62	739.1	10.1
1.55	3.815	.286	.200	1.087	-3.87	-1.91	749.4	3.0
1.95	4.022	.147	.184	.921	-4.98	-.47	758.3	.1
2.45	4.228	.032	.205	.754	-6.06	.49	764.1	.4
3.05	4.300	.040	.247	.602	-6.94	1.01	767.3	1.9
3.80	4.404	.012	.286	.438	-7.63	1.67	768.6	4.3
4.70	4.479	.003	.361	.367	-8.06	.92	770.2	3.0
5.80	4.523	-.002	.411	.276	-8.35	.83	771.1	2.7
7.10	4.564	-.000	.503	-.091	-8.34	-.16	770.7	1.6
8.70	4.590	-.004	.398	.091	-8.90	.21	771.0	1.9
10.70	4.714	0.000	.672	0.000	-8.95	0.00	775.4	0.0

APPENDIX B

JOB CONTROL FILES

TABLE 1

File COMSTAT

```
00100 JOB,CM10000,L15,T30.
00110 ACCOUNT,U707008,TED.
00120 GET,STATIC.
00130 RFL,100000.
00140 UNIFORE(-BATCH,LN=STATCOM,I=STATIC)
00150 PUT,LGO=STATBIN.
00160 LGO.
00170 PUT,OUTPUT=RESULT0.
00180 PUT,STATCOM.
00190 PUT,DAY0.
00200 DFD,DAY0,R.
00210 EXIT.
00215 NOEXIT.
00220 PUT,OUTPUT=RESULT0.
00230 PUT,DAY0.
00240 DFD,DAY0,R.
00250 EOR.
00260 $D2SL7
00270 EOF.
```

TABLE 2

File RUNSTAT

```
00100 JOB,CM10000,L15,T400.
00110 ACCOUNT,U707008,TED.
00120 GET,LGO=STATBIN.
00130 RFL,100000.
00140 LGO.
00150 PUT,OUTPUT=RESULT0.
00160 PUT,DAY0.
00170 DFD,DAY0,R.
00180 EXIT.
00190 NOEXIT.
00200 PUT,OUTPUT=RESULT0.
00210 PUT,DAY0.
00220 DFD,DAY0,R.
00230 EOR.
00240 $D2SL7
00250 EOF.
```

DATE
ILME