


AD-A107 094 ARMY ELECTRONICS RESEARCH AND DEVELOPMENT COMMAND WS--ETC F/6 4/2
TECHNIQUES FOR THE COMPUTATION OF WIND, CEILING, AND EXTINCTION--ETC(U)
JUL 81 J L COGAN
UNCLASSIFIED ERADCOM/ASL-TR-0093 NL

1 1
A
V 2 1 1

0

END
DATE
FILMED
12 81
DTIC

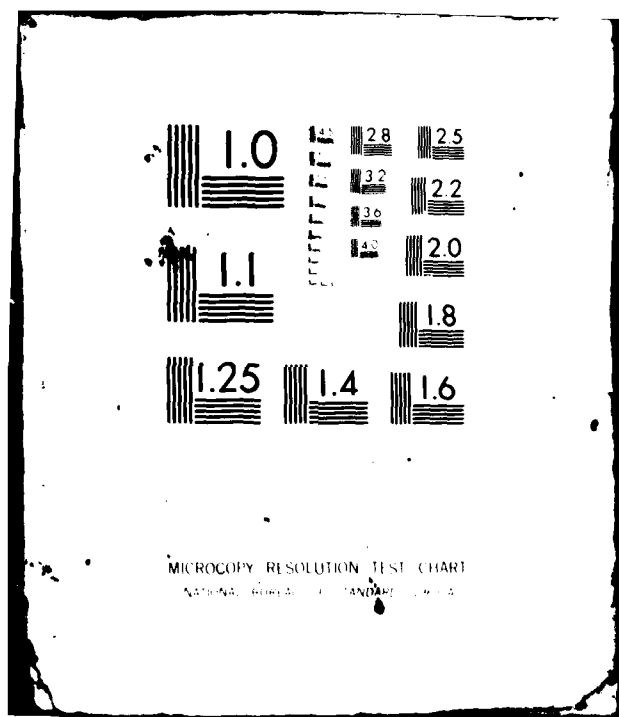



TR-0093

AD

Reports Control Symbol
OSD - 1366

LEVEL 1

12

AD A107094

**TECHNIQUES FOR THE COMPUTATION OF WIND,
CEILING, AND EXTINCTION COEFFICIENT
USING CURRENTLY ACQUIRED RPV DATA**

JULY 1981

DTIC
ELECTE
NOV 10 1981
E

By
James L. Cogan

Approved for public release; distribution unlimited.

DTIC FILE COPY



US Army Electronics Research and Development Command

Atmospheric Sciences Laboratory

White Sands Missile Range, NM 88002

81 11 10 010

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ASL-TR-0093	2. GOVT ACCESSION NO. ADA07094	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) TECHNIQUES FOR THE COMPUTATION OF WIND, CEILING, AND EXTINCTION COEFFICIENT USING CURRENTLY ACQUIRED RPV DATA		5. TYPE OF REPORT & PERIOD COVERED Final Report
7. AUTHOR(s) James L. Cogan		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Atmospheric Sciences Laboratory White Sands Missile Range, NM 88002		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Electronics Research and Development Command Adelphi, MD 20783		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DA Task 1L161101A91A
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE Jul 1981
		13. NUMBER OF PAGES 45
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Target area meteorology Silent area analysis Remotely piloted vehicles Wind Ceiling "Seeability" Extinction coefficient		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Proper deployment and accurate targeting of precision guided munitions depend partly on knowledge of wind velocity, ceiling, and electro-optical extinction in the target area; and knowledge of wind in the target area is crucial for the correct placement of smoke munitions. Wind velocity, ceiling, and volume extinction coefficient in the data silent region near the target may be computed by methods developed in this report using only data currently		

20. ABSTRACT (cont)

acquired by a remotely piloted vehicle of the type now being developed for use by the Army. No new instrumentation is required. The required input consists of flight data and data from an on-board imaging system.

CONTENTS

LIST OF FIGURES.....	4
LIST OF TABLES.....	5
1. INTRODUCTION.....	7
2. ALGORITHMS.....	8
2.1 Wind Velocity.....	8
2.1.1 First Technique: Distance and Time Input.....	8
2.1.2 Second Technique: Drift or Correction Angle Input.....	12
2.1.3 A Shorter Version.....	12
2.2 Volume Extinction Coefficient.....	12
2.2.1 Technique A: Overflight of Target.....	16
2.2.2 Technique B: Standoff from Target.....	19
2.2.3 Computation of Radiance from Voltage.....	20
2.2.4 Computer Programs.....	21
2.3 Ceiling.....	21
3. SAMPLE COMPUTER RUNS.....	26
3.1 Wind Velocity.....	26
3.2 Extinction Coefficient and Ceiling.....	26
4. CONCLUSION.....	35
APPENDIX. COMPUTER CODES IN BASIC FOR THE RPV PROGRAMS.....	36

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist. Special	
A	

LIST OF FIGURES

Figure 1.	Flowchart of the first technique for computation of wind velocity.....	9
Figure 2.	Illustration of the computation of wind velocity by the first algorithm where the orientation is "left," $C > 0$ and $D < 0$, and both Dr_1 and Dr_2 are known.....	11
Figure 3.	Flowchart of the second technique for the computation of wind velocity.....	13
Figure 4.	Illustration of the computation of wind velocity by the second algorithm where the orientation is "right," $C > 0$ and $D < 0$, and both Dr_1 and Dr_2 are known.....	15
Figure 5a.	The geometry for finding the volume extinction coefficient ($k = k'm$) by viewing the same target.....	17
Figure 5b.	Finding k by viewing two closely similar targets.....	17
Figure 5c.	Finding k by viewing the same target along different slant paths (different angles, both $> 0^\circ$).....	18
Figure 6.	Flowchart of technique A for estimation of volume extinction coefficient.....	22
Figure 7.	Flowchart of technique A for estimation of volume extinction coefficient using voltage input.....	23
Figure 8.	Flowchart of technique B for estimation of volume extinction coefficient.....	24
Figure 9.	Change in the flowchart (figure 8) for estimation of extinction coefficient with two slant paths when voltage input replaces radiance input.....	25
Figure 10.	Geometry for estimation of ceiling ($c = h + z$).....	27
Figure 11.	Flowchart for the estimation of ceiling.....	28
Figure 12.	Use of method 1 to compute wind velocity.....	29
Figure 13.	Use of method 1 to compute wind velocity when both Dr_1 and Dr_2 are known.....	30
Figure 14.	Use of method 2 to compute wind velocity when both Dr_1 and Dr_2 are known.....	31
Figure 15.	Use of method 2 to compute wind velocity.....	32

LIST OF TABLES

TABLE 1.	COMPUTER OUTPUT FOR THE FOUR EXAMPLES OF FIGURES 12 THROUGH 15.....	33
TABLE 2.	SAMPLE COMPUTATIONS OF VOLUME EXTINCTION COEFFICIENT USING TECHNIQUE A WITH RADIANCE INPUT.....	33
TABLE 3.	SAMPLE COMPUTATIONS OF VOLUME EXTINCTION COEFFICIENT USING TECHNIQUE B WITH RADIANCE INPUT.....	34
TABLE 4.	SAMPLE COMPUTATION OF CEILING.....	34
TABLE 5.	SAMPLES OF OUTPUT FROM THE COMPUTER PROGRAMS FOR CEILING AND VOLUME EXTINCTION COEFFICIENT.....	35

1. INTRODUCTION

Proper deployment and accurate targeting of precision guided munitions depend partly on knowledge of wind velocity, ceiling, and electro-optical extinction in the target area. Knowledge of wind in the target area is crucial for the correct placement of smoke munitions, since wind velocity near the location where the artillery is deployed may differ considerably from that near the target. The ability to accurately estimate atmospheric characteristics in the target area also should permit the more efficient use of both guided and unguided munitions and thereby reduce the number of rounds needed to accomplish a specific task.

Wind velocity, ceiling, and volume extinction coefficient may be computed by methods (developed in this report) that use only data currently acquired by a remotely piloted vehicle (RPV). No new instrumentation is required; the input consists of flight data and data from an on-board imaging system. Since some of the principal uses of RPV now and in the near future¹ are surveillance of enemy-held territory and target detection and designation, techniques developed herein may be used to describe the above atmospheric variables in the data silent region near the target while the aircraft performs other missions such as surveillance. (See Robinson² for a general description of a number of RPV and their instrumentation and Elson³ for information on the RPV system being developed for the Army.)

The data for the first algorithm for wind velocity, which uses along-wind information, consists of heading, airspeed, and ground speed (or distance flown and time to fly that distance) for two perpendicular courses. The second wind velocity algorithm, which uses crosswind information, requires heading, airspeed, and drift or correction angle for two perpendicular courses. Input for the algorithm for computation of volume extinction coefficient consists of horizontal flight or ground distance, altitude, angles between the vertical and the line of sight (LOS) to the radiating surface, and radiances or equivalent voltages from the radiating surface to the RPV over two separate paths. The ceiling algorithm includes horizontal flight or ground distance, altitude, angle between the flight path and the LOS to the cloudbase, and the angle between the flight path and the LOS to a landmark vertically below the viewed cloudbase. These methods are embodied in computer programs that can be run on a desktop computer. An alternate shorter program is presented for calculation of wind velocity when both headings are known. The computer codes, in BASIC, are shown in the appendix.

¹M. H. Crowell, 1980, A Survey of Simulation and Test Results for Assessing RPV Performance in a WBIC Environment, Final Report SPC 615, prepared by Systems Planning Corporation for PMO, Tactical Airborne Remotely Piloted Vehicle/Drone Systems, US Army Aviation R&D Command, Contract DAAK50-80-C-0011, Saint Louis, MO, 50 pp

²A. Robinson, 1980, "Battlefield Reconnaissance: Penetrating the Fog of War," Military Tech and Econ, 4(15):33-42

³B. M. Elson, 1980, "Mini-RPV Being Developed for Army," Aviation Week and Space Technology, 7 January 1980, pp 2-7

2. ALGORITHMS

The algorithms described in this report are mathematically simple and easy to understand. The manual versions of these procedures require only a simple calculator or trigonometric tables, graph paper, a fine-scaled ruler, and a pencil and paper. A desktop computer able to use BASIC is sufficient to perform the automated versions. The operator need only type in the requested quantities.

2.1 Wind Velocity

2.1.1 First Technique: Distance and Time Input

The input data are (1) airspeed in meters per second along the initial course and the second perpendicular path (X and Y), (2) distance in meters along each path and the associated time in seconds (D_x , T_x and D_y , T_y), and (3) heading (direction to) of each course (Dr_1 and Dr_2). To obtain ground speed (X_g and Y_g), simply divide the distances by the appropriate times ($X_g = D_x/T_x$, $Y_g = D_y/T_y$). Subtracting X from X_g gives the difference C; similarly $Y_g - Y = D$. The windspeed (V) is computed from the formula for the hypotenuse of a right triangle. $V = (C^2 + D^2)^{1/2}$.

The computation of wind direction (Dir) in the desktop computer version requires values of C, D, Dr_1 , and Dr_2 . If either Dr_1 or Dr_2 is missing (input a 999 for the missing value) two values of Dir are computed, one of which is correct. The correct value may be determined with the aid of other information (for example, a synoptic chart can indicate which of the two values is most likely). When both Dr_1 and Dr_2 are not available, a message is printed saying that no directions were given or computed. A further condition for the computation of direction is whether the orientation of the flight paths is "right" or "left." In the context of this report, the orientation is determined by whether the Y vector is to the right or left of the X vector when facing the direction of flight along the X vector (that is, toward Dr_1). Numerically, "right" occurs when $Dr_2 > Dr_1$ (360° added to Dr_2 if $Dr_2 < 90^\circ$ and $270^\circ \leq Dr_1 < 360^\circ$) and "left" occurs when $Dr_1 > Dr_2$ (360° added to Dr_1 if $Dr_1 < 90^\circ$ and $270^\circ \leq Dr_2 < 360^\circ$).

A "flowchart" (partly in plain English) can provide a better understanding of the intricacies of the first method than a written explanation which could be tedious and somewhat confusing for the reader. Such a chart is presented in figure 1. Figure 2 illustrates the computation of wind velocity for a left orientation when $C > 0$ and $D < 0$, in the case of both Dr_1 and Dr_2 known. These two figures should be used together to gain a basic understanding of the first technique.

The present form of this algorithm uses distance flown and time to fly that distance to compute ground speed. Simple modifications to the program will permit ground speed to be input directly. The input routine would need a slight modification, and the simple computation of ground speed would be eliminated.

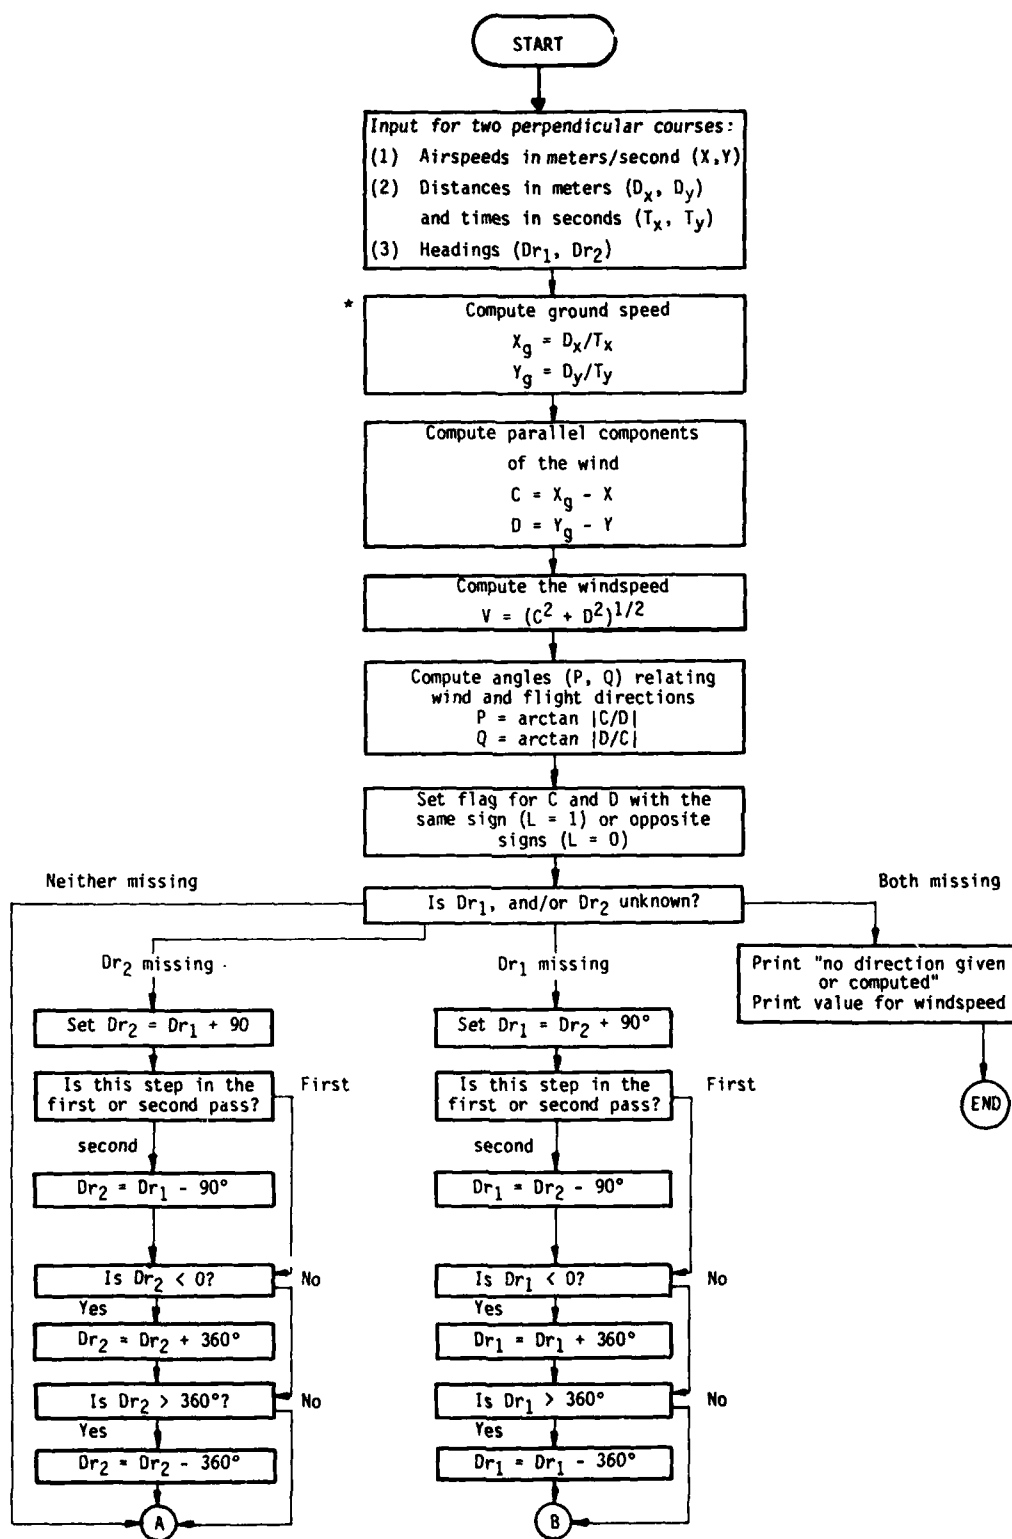


Figure 1. Flowchart of the first technique for computation of wind velocity.

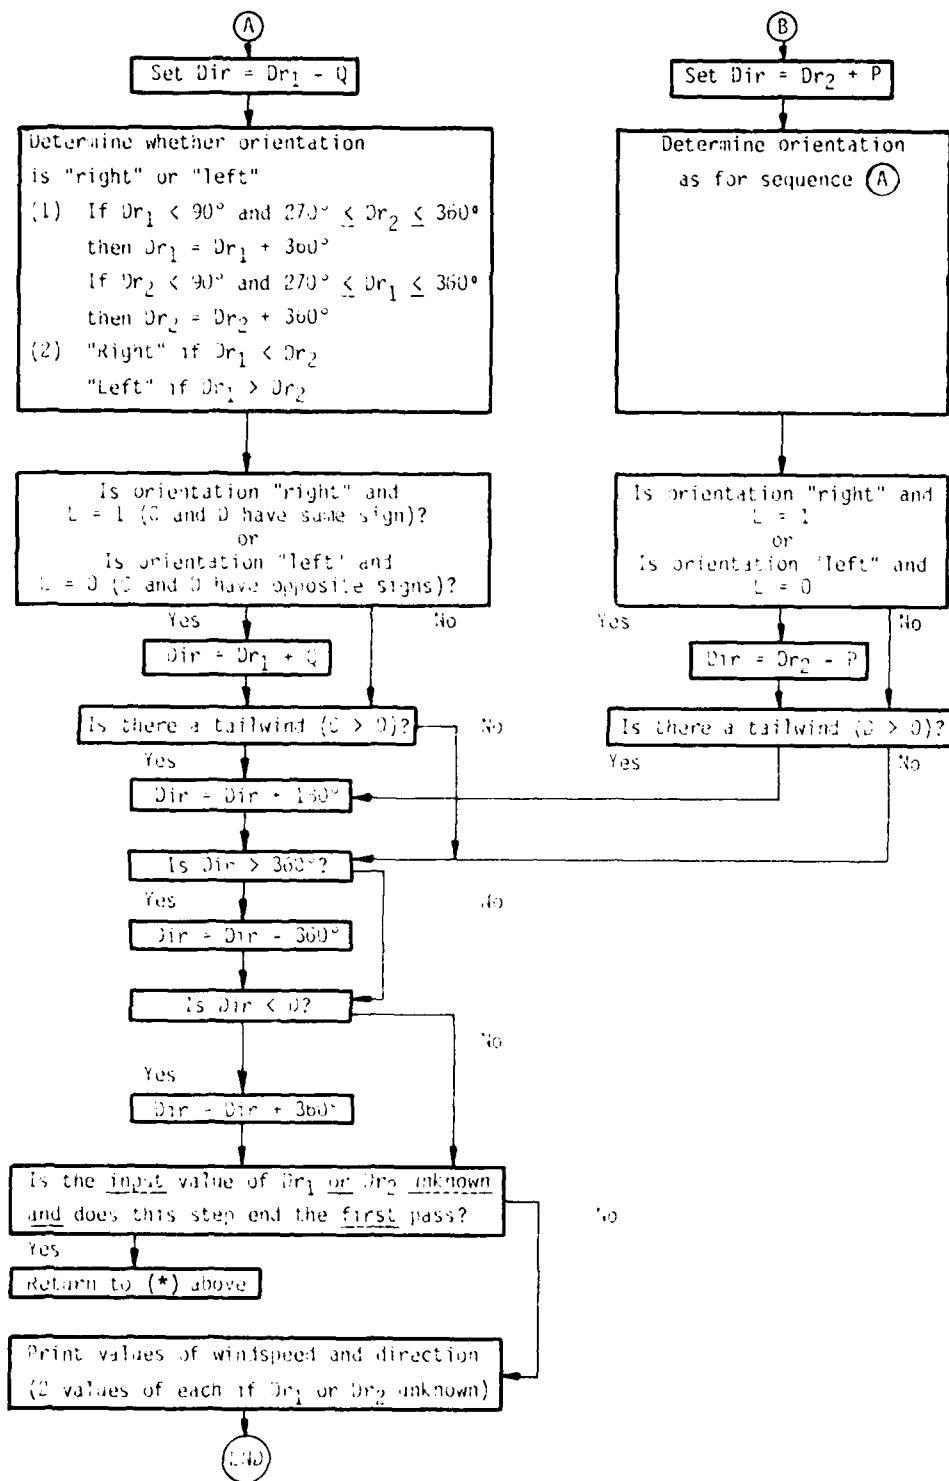


Figure 1 (cont)

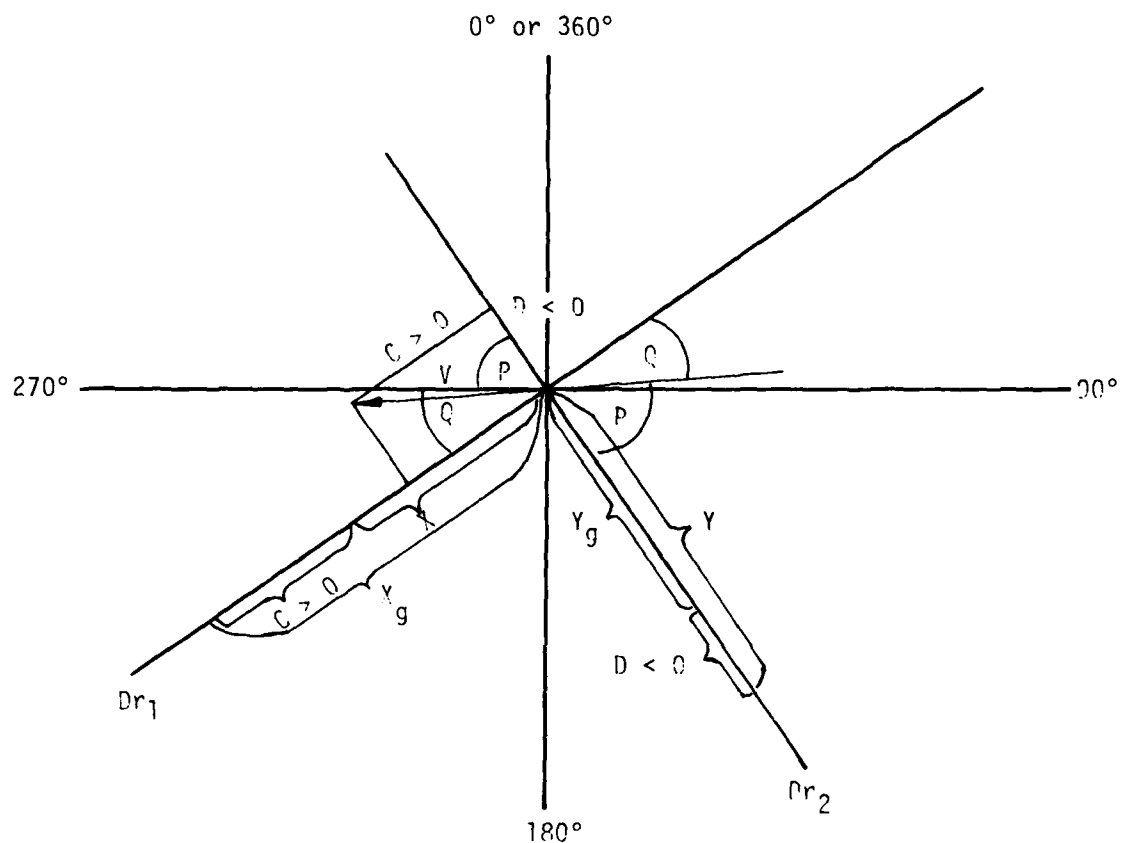


Figure 2. Illustration of the computation of wind velocity by the first algorithm where the orientation is "left," $C > 0$ and $D < 0$, and both Dr_1 and Dr_2 are known. X and Y are airspeeds and X_g and Y_g are ground speeds. $C = X_g - X$ and $D = Y_g - Y$. V is the wind vector and P and Q are computed by the arctangents of the absolute values of C/D and D/C , respectively. Dr_1 and Dr_2 are the directions toward which the RPV flies along the X and Y flight paths, respectively. In this example, the wind is blowing from a direction slightly less than 90° .

2.1.2 Second Technique: Drift or Correction Angle Input

The input data are (1) airspeed in meters per second along the two perpendicular courses (X and Y), (2) a flag to indicate whether drift ($I = 1$) or correction ($I = -1$) angles are utilized, (3) the drift or correction angles (A and B) in degrees, and (4) the heading of each course (Dr_1 and Dr_2). An angle is considered positive if it describes an arc running to the right of the flight path when facing in the direction of flight. The tangent of the angle times the relevant airspeed gives the crosswind component for each course. $C = X \tan A$, $D = Y \tan B$. The windspeed (V) is computed from the same formula as in the first algorithm; that is $V = (C^2 + D^2)^{1/2}$.

The computation of wind direction (Dir) requires C, D, Dr_1 , and Dr_2 as input. If either Dr_1 or Dr_2 is missing (input a 999 for the missing value) two values of Dir are computed, one of which is correct. When both Dr_1 and Dr_2 are missing, a message is printed saying that no directions were given or computed. The orientation, left or right, is determined as in the first method.

A "flowchart" similar to that of figure 1 is presented in figure 3, but for the second method. Figure 4 illustrates the computation of wind velocity for a right orientation where $C > 0$ and $D < 0$, when both Dr_1 and Dr_2 are known. These two figures should be used together to gain a basic understanding of the second technique.

2.1.3 A Shorter Version

A shorter version of the computer program was developed that has about two-thirds the number of statements and storage requirement as the program described in sections 2.1.1 and 2.1.2 of this report. To reduce the number of statements, it was assumed that Dr_1 and Dr_2 would always be known. If either direction is unknown, this program can be run twice with the unknown direction = the known direction $+90^\circ$. (One of the two velocities will be correct.) Consequently, all statements associated with the extra computation required to handle the cases of either Dr_1 or Dr_2 unknown were removed, along with those activated when both directions were missing. A listing of the shorter version is in the appendix along with the listing of the complete version. Figures 2 and 4 illustrate the output from the shorter program.

2.2 Volume Extinction Coefficient

The computer programs for the calculation of volume extinction coefficient require the input of either (1) horizontal flight or ground distance, (2) altitude, (3) or both distance and altitude. If either distance or altitude is unknown, then (4) the angle between the vertical and the slant path (technique A) or (5) the angles between the vertical and the two slant paths (technique B) are input. Finally (6) radiances or (7) equivalent voltages are entered for the respective views of the radiating surface(s).

The equations are derived by first assuming that the vertical distribution and amount of scatterers and absorbers in any vertical column of the same height are constant over the area of interest. This assumption is reasonable to a fair accuracy over small areas of the order of a few tens of square kilometers or less, not in the immediate vicinity of atmospheric "discontinuities" such

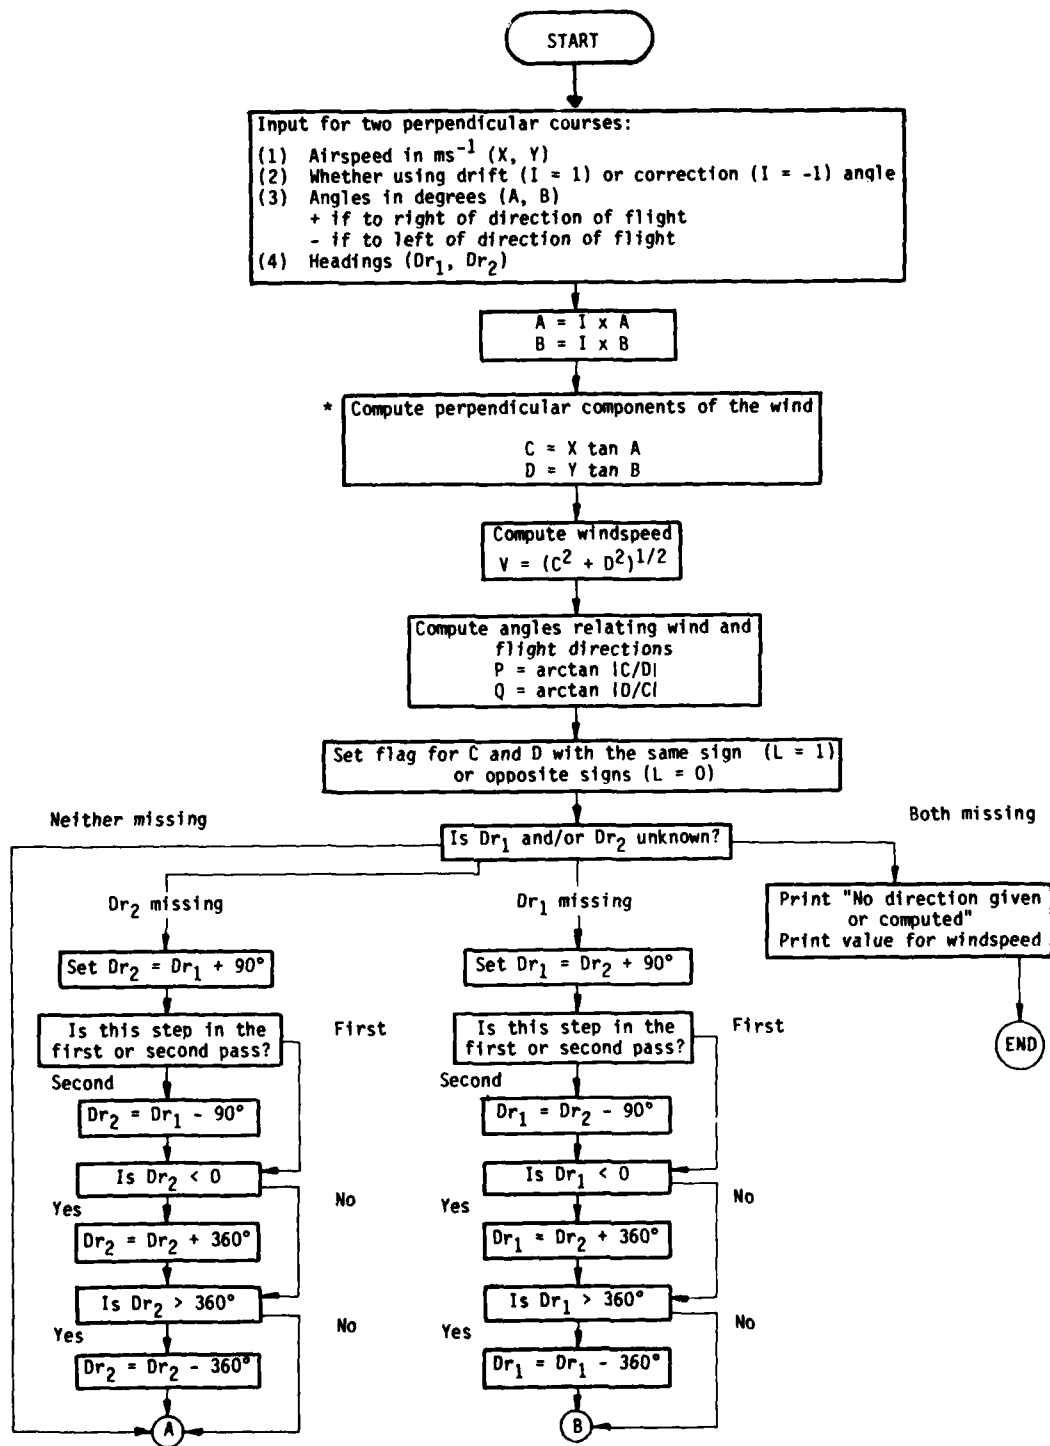


Figure 3. Flowchart of the second technique for the computation of wind velocity.

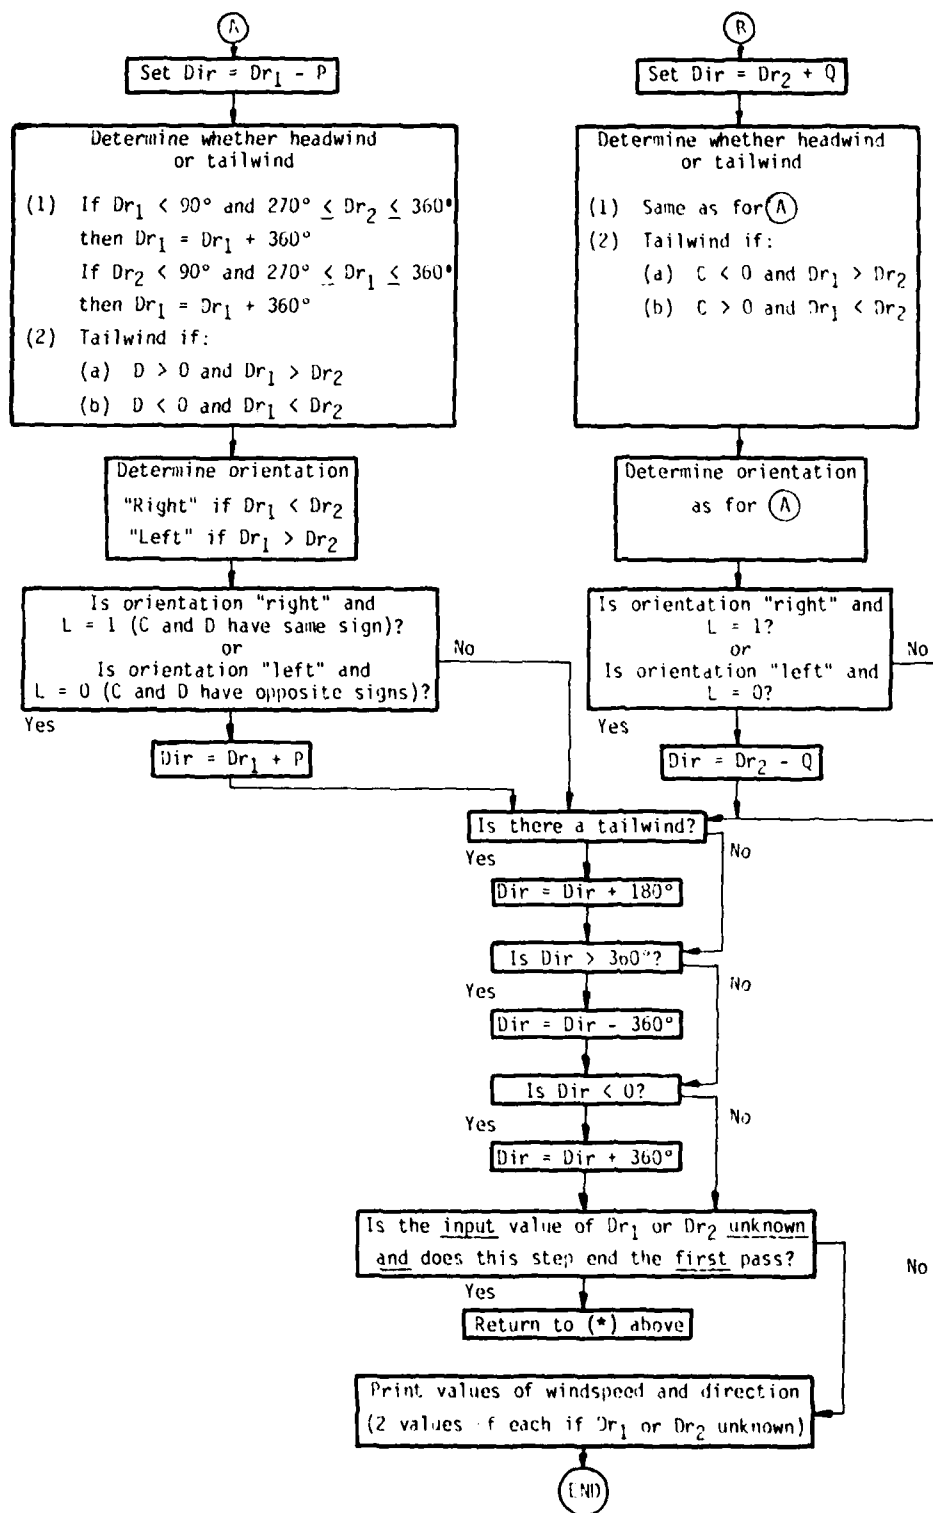


Figure 3 (cont.)

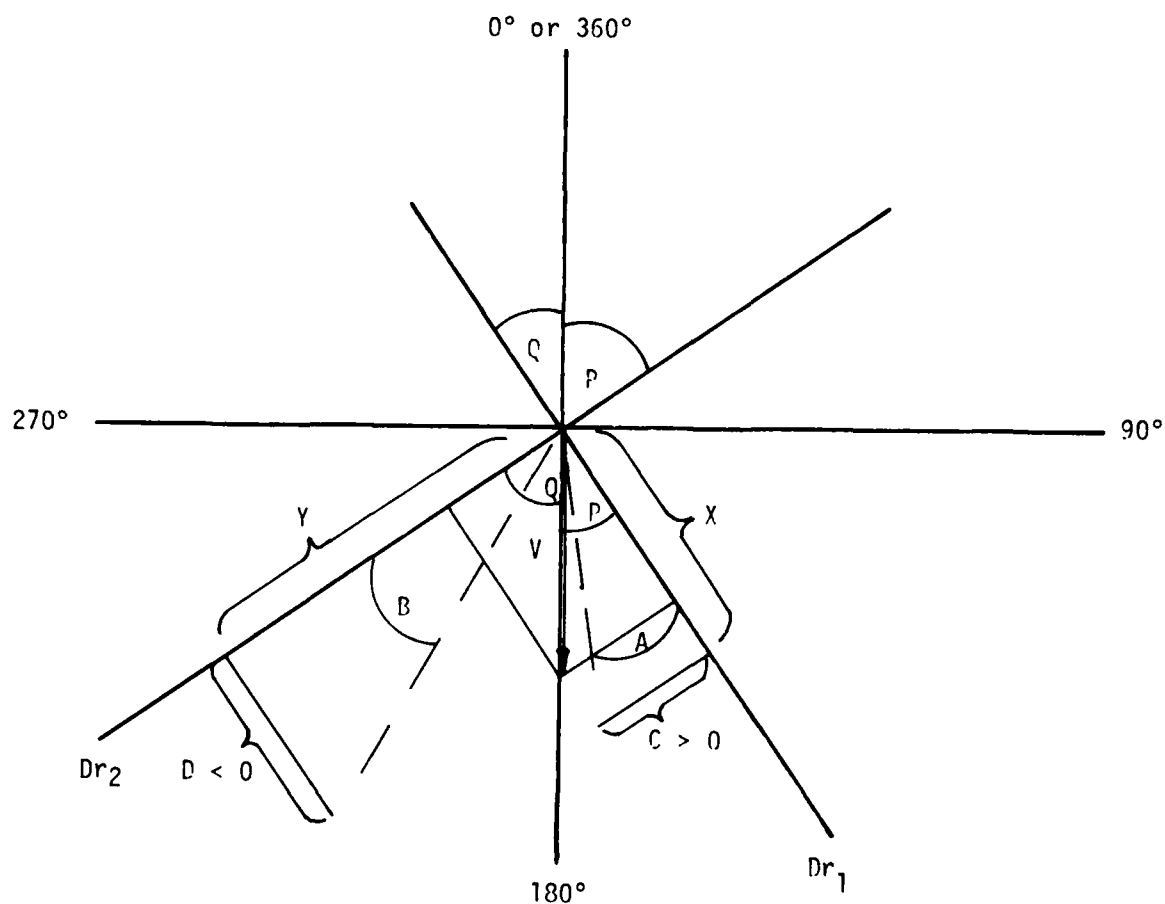


Figure 4. Illustration of the computation of wind velocity by the second algorithm where the orientation is "right," $C > 0$ and $D < 0$, and both Dr_1 and Dr_2 are known. The variables shown are the same as in figure 2 except that A and B are the drift angles (= -correction angles) for the X and Y flight paths, respectively. The crosswind components are $C = X \tan A$ and $B = Y \tan B$. In this example, the wind is from slightly less than 360° .

as a sharp front. Therefore, between a given flight level and the ground, a change in total mass of absorber or scatterer roughly is dependent only on the difference in path length.

Taking the ratio of two radiances from the same source but over different path lengths and using Beer's law, we have:

$$R_2/R_1 = R_0 e^{-k'mZ_2} / R_0 e^{-k'mZ_1}$$

where R = radiance, k' = mass extinction coefficient, m = mass of absorber and scatterer per unit volume, Z_1 and Z_2 are path lengths, and the subscripts 0, 1, 2 refer to values at the source and at the sensor for the two paths, respectively. If we let the volume extinction coefficient (k) = $k'm$, and we factor out R_0 , we have

$$\begin{aligned} R_2/R_1 &= e^{-kZ_2} / e^{-kZ_1} \\ &= e^{-kZ_2 + kZ_1} \\ &= e^{k(Z_1 - Z_2)} \end{aligned}$$

Taking the logarithm, we have:

$$\ln (R_2/R_1) = k (Z_1 - Z_2)$$

and for k :

$$k = \ln (R_2/R_1) / (Z_1 - Z_2) \quad (1)$$

If the RPV can fly directly over the radiating surface, we can use technique A (see figures 5a and 5b). If overflight is not possible, then use technique B (figure 5c). These techniques are described below; the reader should refer to the appropriate figure (5a, b, or c) in the following descriptions.

2.2.1 Technique A: Overflight of Target

Here we assume overflight is possible. The RPV observes two surfaces of closely similar properties such as different regions of a lake with a very nearly uniform surface temperature, or it looks at the same surface, once vertically and again along a slant path.

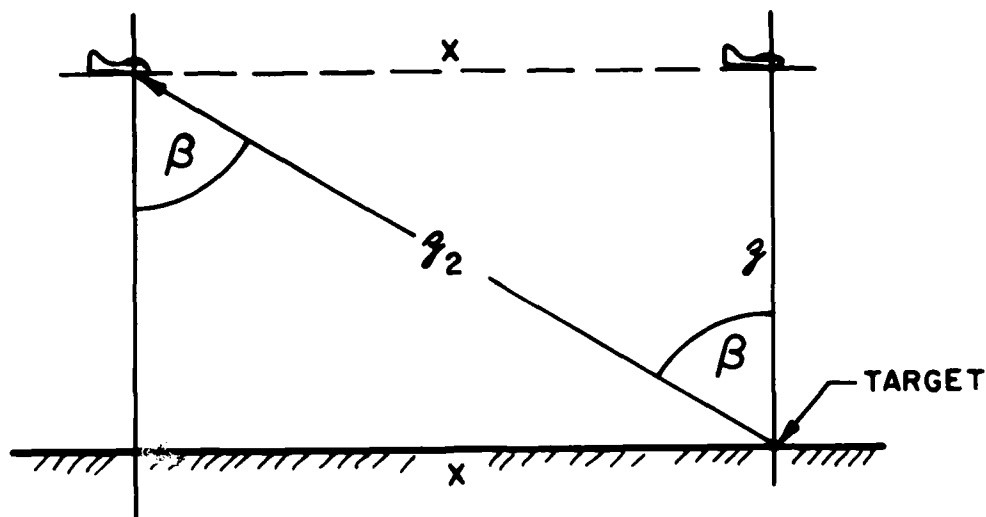


Figure 5a. The geometry for finding the volume extinction coefficient ($k = k'm$) by viewing the same target. (k' = mass extinction coefficient, m = mass of absorber and scatter per unit distance.) x = ground or horizontal distance, β = angle between vertical and line of sight to target, and z and z_2 are the vertical and slant paths.

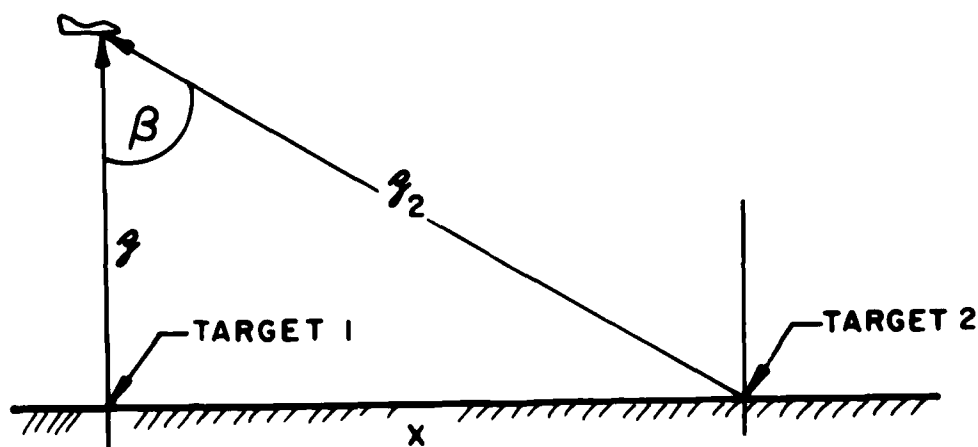


Figure 5b. Finding k by viewing two closely similar targets. Variables are as in 5a.

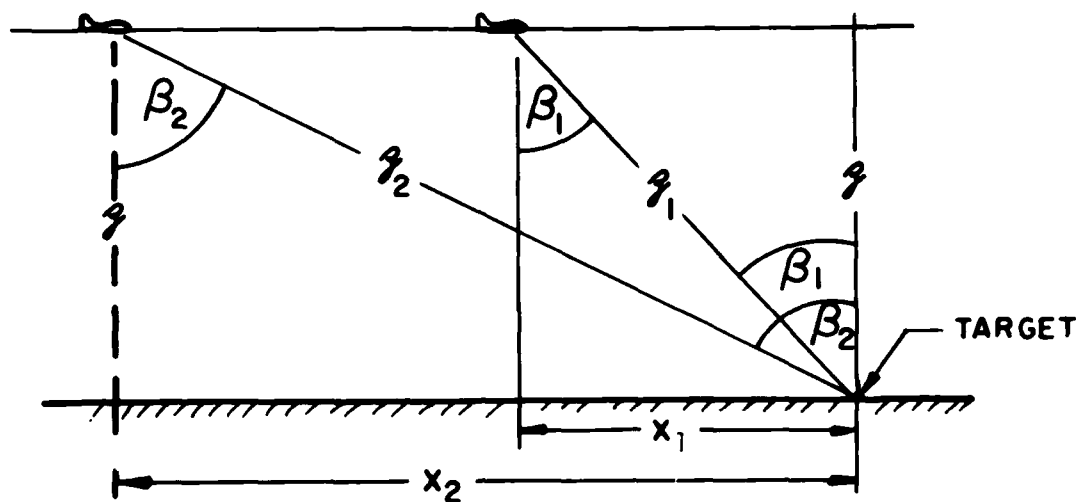


Figure 5c. Finding k by viewing the same target along different slant paths (different angles, both $> 0^\circ$). Here Z = altitude, Z_1 and Z_2 = slant paths, R_1 and R_2 = respective radiances, β_1 and β_2 = angles between the line of sight to the target and the vertical, and x_1 and x_2 are horizontal distances along the ground or flight path.

Referring to figures 5a and b, we see that X = distance along the ground, Z = Z_1 = altitude (vertical path), Z_2 = slant path, and β = angle between the vertical and the slant path.

- a. If X and Z are known but not β , then

$$\beta = \arctangent (X/Z)$$

$$\text{and } Z_2 = Z/\cos \beta.$$

- b. If Z and β are known but not X , then as in a

$$Z_2 = Z/\cos \beta.$$

- c. If X and β are known but not Z , then

$$Z_2 = X/\sin \beta$$

$$\text{and } Z = X/\tan \beta$$

Using equation (1) and the above geometrical relationships, we have for the first two cases (a, b):

$$k = \ln (R_1/R_2)/Z(1 - 1/\cos \beta) \quad (2)$$

and for the third case (c)

$$k = \ln (R_2/R_1)/X(1/\tan \beta - 1/\sin \beta) \quad (3)$$

2.2.2 Technique B: Standoff from Target

Here we assume overflight is not possible. The RPV views the same surface from two different angles (neither path vertical as in figure 5c) or views two closely similar surfaces (no figure shown).

Referring to figure 5c, we see that X_1 and X_2 = horizontal distances along the flight path or the ground, Z = altitude, Z_1 and Z_2 are slant paths, and β_1 and β_2 are the respective angles between Z_1 and Z_2 and the vertical. Therefore:

- d. If X_1 , X_2 and Z are known but not β_1 , β_2 , then

$$\beta_1 = \arctangent (X_1/Z), \beta_2 = \arctangent (X_2/Z)$$

$$\text{and } Z_1 = Z/\cos \beta_1, Z_2 = Z/\cos \beta_2$$

- e. If Z and β_1 , β_2 are known but not X_1 , X_2 , then as in d

$$Z_1 = Z/\cos \beta_1, Z_2 = Z/\cos \beta_2$$

f. If X_1 , X_2 and β_1 , β_2 are known* but not Z , then

$$Z_1 = X_1/\sin \beta_1, Z_2 = X_2/\sin \beta_2$$

$$\text{and } Z = X_1/\tan \beta_1 = X_2/\tan \beta_2$$

Using equation (1) and the above geometrical relationships, we have for cases d and e:

$$k = \ln(R_2/R_1)/Z(1/\cos \beta_1 - 1/\cos \beta_2) \quad (4)$$

and for case f:

$$k = \ln(R_2/R_1)/(X_1/\sin \beta_1 - X_2/\sin \beta_2) \quad (5)$$

However, for $\beta_1 \rightarrow 0$ (see figure 5c) equation (5) fails. To avoid this problem, replace $X_1/\sin \beta_1$ with Z ($= X_2/\tan \beta_2$) for small values of β_1 (= several degrees or less). Therefore, in place of equation (5) use:

$$k = \ln(R_2/R_1)/X_2(1/\tan \beta_2 - 1/\sin \beta_2) \quad (6)$$

Note that equations (6) and (3) are the same, where $X_2 = X$ and $\beta_2 = \beta$ (compare figures 5a and 5c).

2.2.3 Computation of Radiance from Voltage

Modifications of the two techniques were developed where radiance is not input directly, but is computed from voltages. Commonly, sensors use devices that transform received energy into voltages, which in turn are converted into radiances by the means of some algorithm. Although the form of the conversion algorithm may differ from one sensor to another (for example, linear or quadratic), a simple linear form was used here only to indicate how such equations would fit into the techniques described in this report. The equations have the form $R = a + bV$ where R = radiance, V = voltage, and a and b are constants determined empirically during calibration. It is assumed that one voltage is produced for each of the two views of the radiating surface or target, yielding the two required radiances.

*These computations may be performed if either β_1 or β_2 is known. For example, if X_1 and β_1 are known, we can compute Z_1 and Z . Having Z and X_2 , we can then calculate β_2 .

2.2.4 Computer Programs

Four "flowcharts" were constructed to enable the reader to understand the computer programs more easily and to avoid the possible confusion an entirely written explanation would cause. The reader should refer to figure 5 when viewing these flowcharts. Figure 6 shows the chart for technique A, where the RPV can overfly the target (= radiating surface) and radiances are input. Figure 7 presents the chart for technique A when voltages are input. Figure 7 differs from figure 6 in the substitution of the voltage input and conversion algorithm in place of the radiance input statement. Figure 8 has the flowchart for technique B, where the RPV cannot overfly the target and radiances are input. Figure 9 illustrates the difference in the flowchart for technique B when voltage input replaces radiance input; the entire flowchart is not shown. The programs for both techniques are presented in the appendix.

2.3 Ceiling

Ceiling (c) may be computed by using simple geometry and data from an RPV carrying a movable sensor active in any imaging wavelength region. The required input includes (1) upward elevation angle which is the angle between the flight path and the LOS to cloudbase, and either (2) horizontal flight or ground distance, (3) altitude, or (4) both altitude and distance. If only altitude or distance is known, then input (5) the depression angle which is the angle between the flight path and the LOS to a landmark vertically below the view of the cloudbase.

Referring to figure 10, we have for the ceiling

$$c = h + Z$$

where Z = altitude and h = vertical distance from flight level to cloudbase. Furthermore, $h = X \tan \beta$, where X = horizontal flight or ground distance and β = upward elevation angle. Substituting for h , we have for the case of X and Z known:

$$c = Z + X \tan \beta . \quad (7)$$

If X is known but not Z , we have for Z

$$Z = X \tan \alpha ,$$

where α = depression angle. Using equation (7) and substituting for Z , we have for c

$$\begin{aligned} c &= X \tan \alpha + X \tan \beta \\ &= X (\tan \alpha + \tan \beta) . \end{aligned}$$

If Z is known but not X , we have for X

$$X = Z \cot \alpha$$

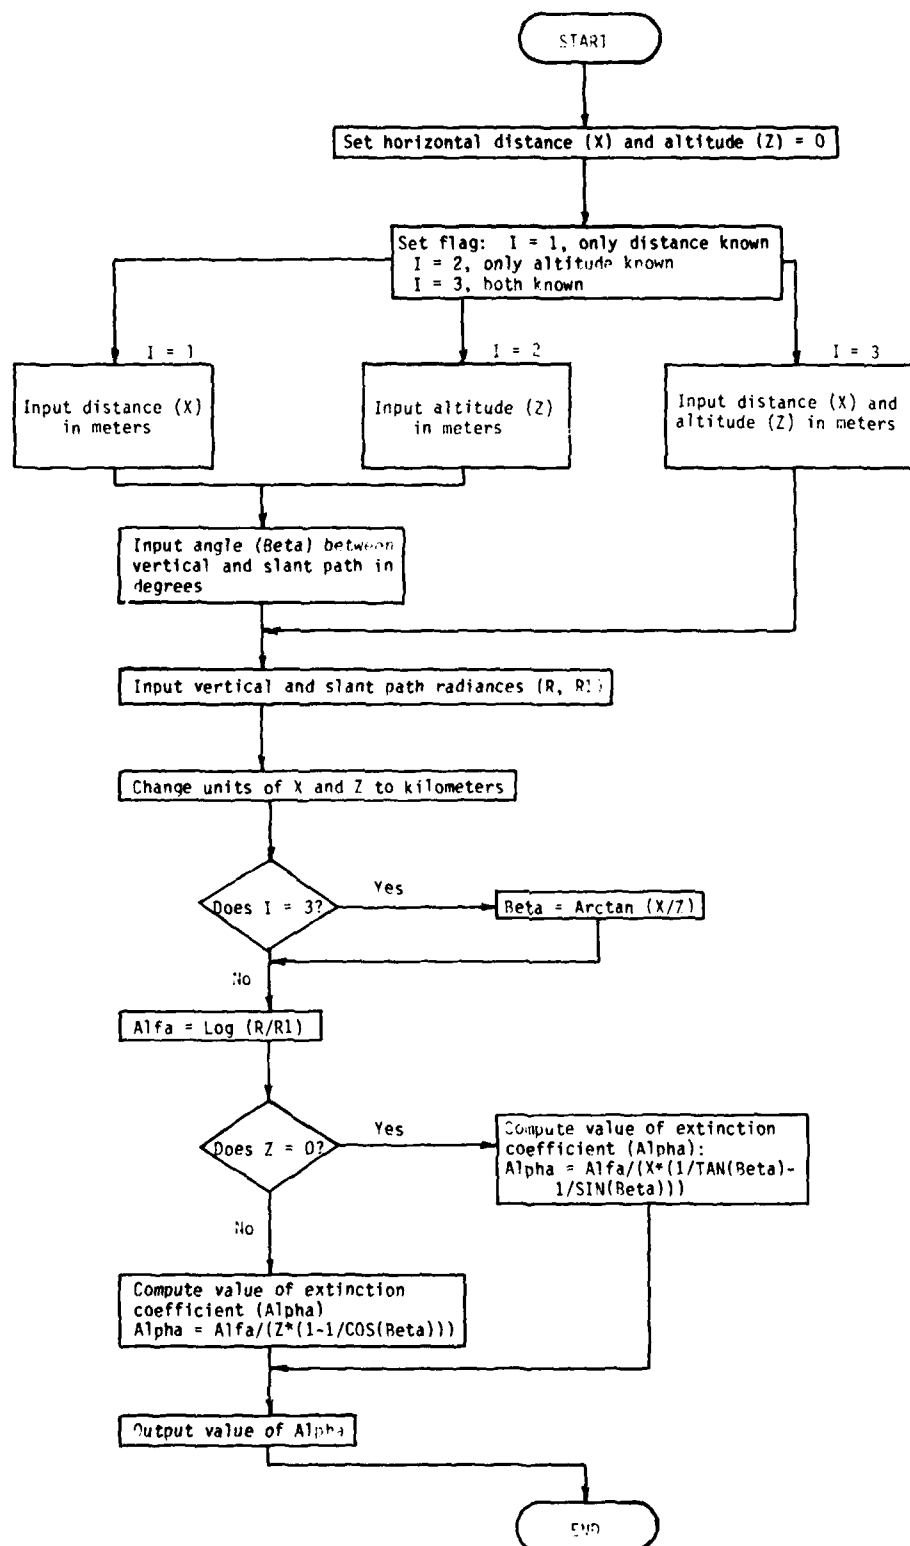


Figure 6. Flowchart of technique A for estimation of volume extinction coefficient.

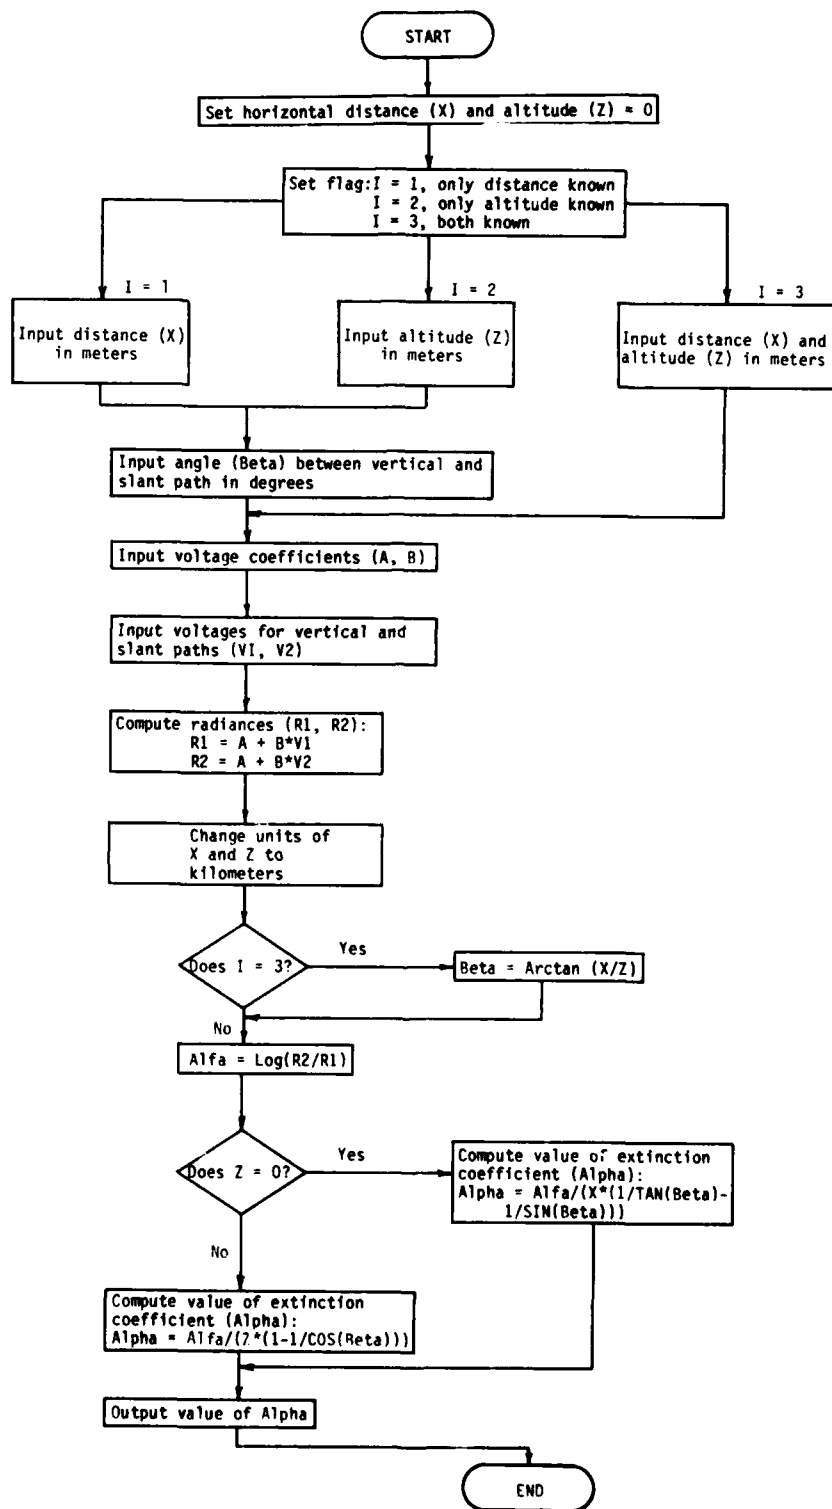


Figure 7. Flowchart of technique A for estimation of volume extinction coefficient using voltage input.


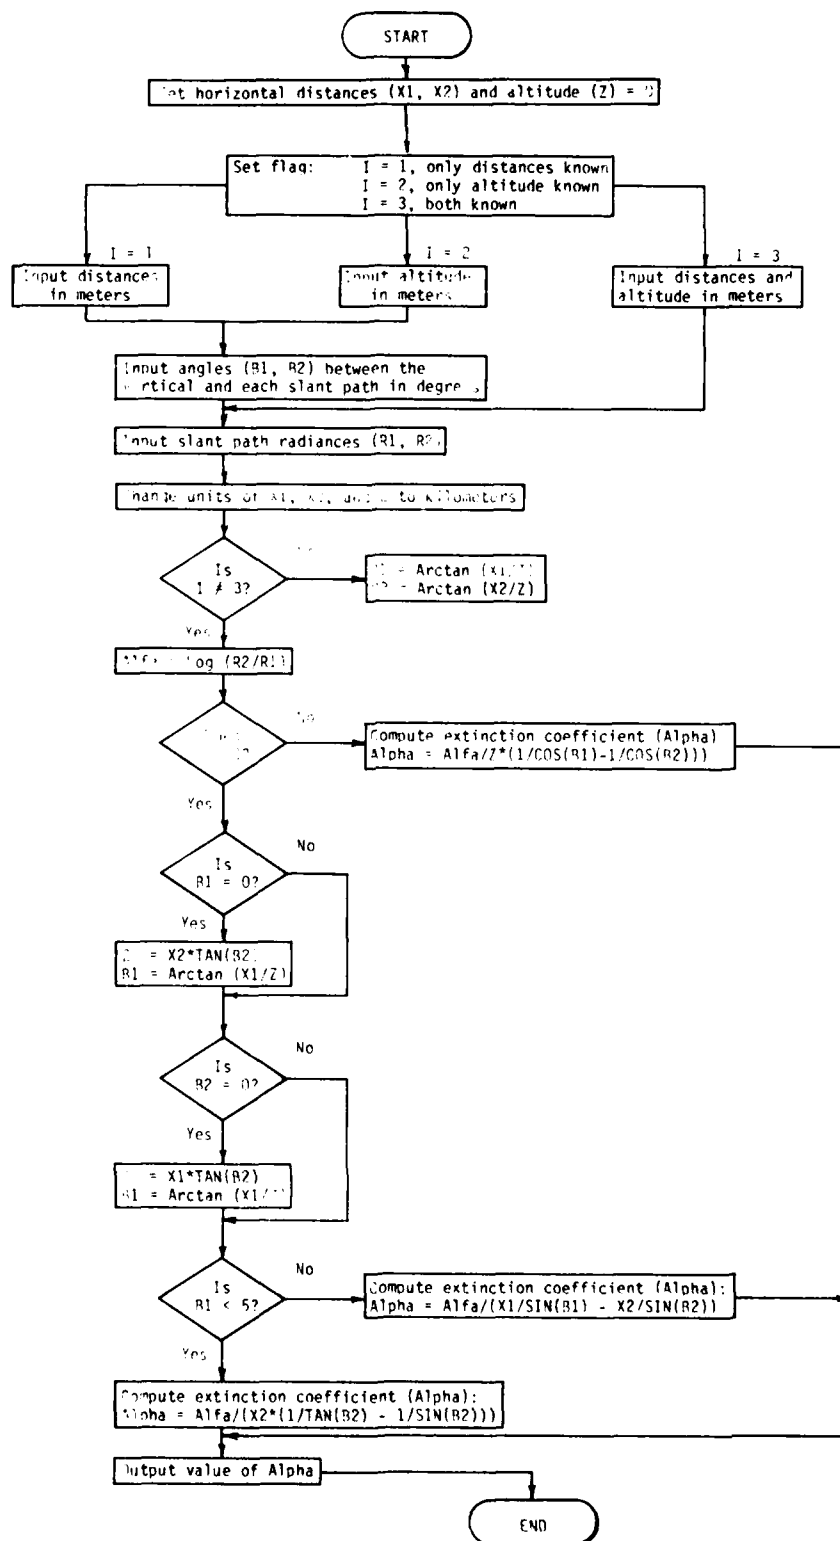


Figure B. Flowchart of technique B for estimation of volume extinction coefficient.

In place of:

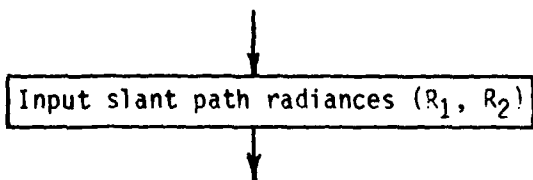

substitute:

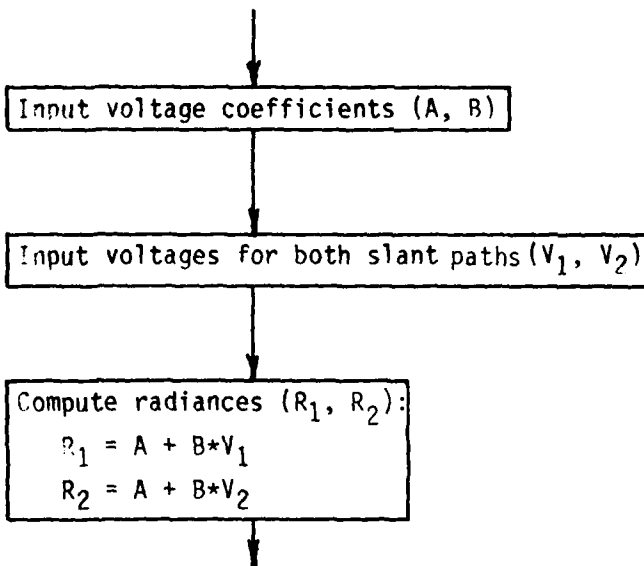


Figure 9. Change in the flowchart (figure 8) for estimation of extinction coefficient with two slant paths when voltage input replaces radiance input.

Using equation (7) and substituting for X, we have for c

$$\begin{aligned} c &= Z + Z \cot \alpha \tan \beta \\ &= Z (1 + \tan \beta / \tan \alpha) . \end{aligned}$$

It has been assumed that the cloudbase can be observed directly above the landmark from the RPV (see figure 10). The computation of c becomes less accurate as the cloudbase to landmark path departs from vertical, although a departure of only a few degrees is not significant. Furthermore, it is assumed that the distance X is the same for both views, to the cloudbase and to the landmark. The value of c will depart from the real value as the difference in X for the two views. This problem could be solved if a side looking sensor was used or the RPV flew at a low speed and X was large. For example, relatively little degradation will occur if the speed of the RPV = 20 ms⁻¹, X = 4000 m, and the sensor viewed both scenes within 2 s.

The program for calculation of ceiling is presented as a "flowchart" in figure 11. The reader also should refer to figure 10 as an aid to understanding the flowchart. The computer code for this program is presented in the appendix.

3. SAMPLE COMPUTER RUNS

3.1 Wind Velocity

Four examples, two for each algorithm, are presented in this section to better demonstrate the computation of wind velocity by the two methods. For each example, a table shows the calculations required and an accompanying graph shows the graphical solution. Each set of one table and one graph is presented in the form of one figure for ease of understanding (figures 12 through 15). Although more than four situations exist (for example, "right" orientation for both C and D > 0 and both Dr₁ and Dr₂ known), to include them all for both methods would make this report unnecessarily large and tedious. Table 1 gives the computer output for these four examples.

Figures 12 and 13 present solutions for the first algorithm. In figure 12, C > 0 and D < 0, and the orientation is not known since only Dr₂ is given. Two solutions are computed, one of which is correct. Figure 13 has a "left" orientation where C < 0 and D > 0. Figure 2 and section 2.1.1 describe the relevant variables.

Figures 14 and 15 show solutions for the second algorithm. Figure 14 has an orientation that is "left" and C and D are negative. In figure 15, the orientation is unknown since only Dr₁ is known, and C and D are both positive. Figure 4 and section 2.1.2 describe the relevant variables.

3.2 Extinction Coefficient and Ceiling

A series of runs of the ceiling and the extinction coefficient (radiance input) programs were made to illustrate the algorithms. Sample output from the extinction programs that input voltage are not shown here because they essentially repeat the results of the radiance versions and a lengthy series of examples would be unnecessarily tedious. Tables 2 and 3 show computations for both techniques in which both manual and computer-generated values are

shown. Input values are listed with the appropriate equations. The radiance values have no specific units since they could have any standard (or nonstandard) units without affecting the results. In any case, the ratio of the radiances is dimensionless. Also, the values of k in these tables were computed for comparison and technique demonstration purposes, assuming perfect input. In the real world, the last two or three digits to the right of the decimal point probably would be meaningless.

Ceiling computations are shown in table 4 in a format similar to that of tables 2 and 3. Input values are listed along with the appropriate equations and both manual and computer-generated values are shown. Finally, table 5 presents samples of output from the computer programs used to generate the values in tables 2 through 4, and output from the "voltage" versions of the extinction programs.

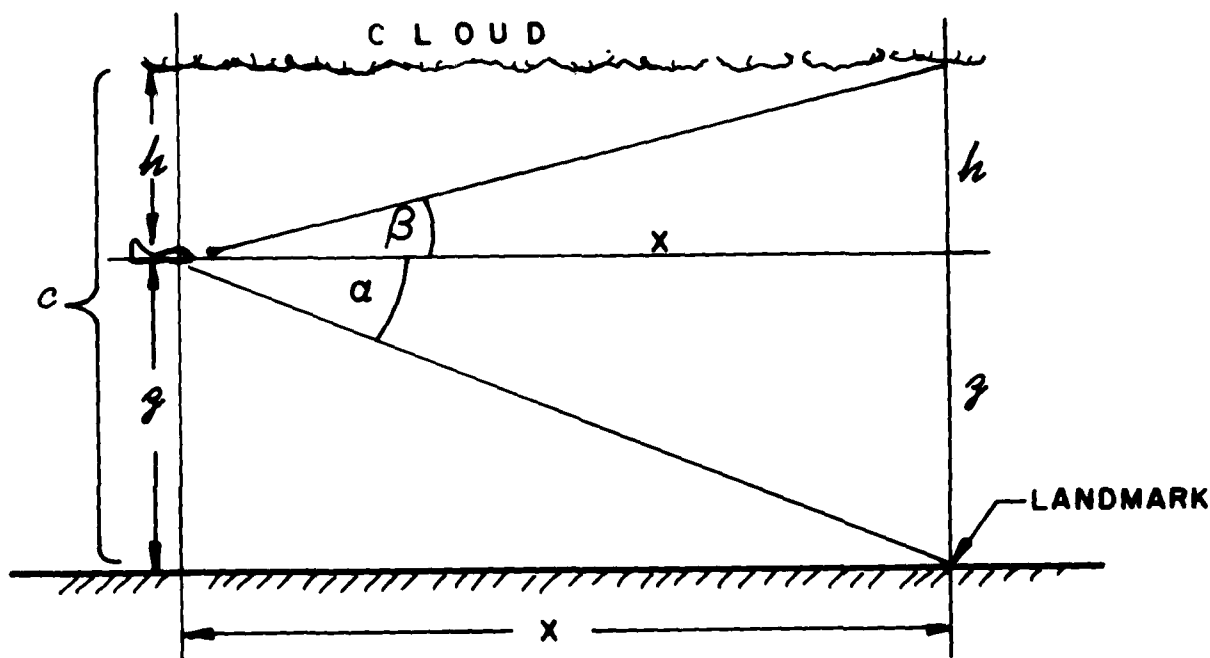


Figure 10. Geometry for estimation of ceiling ($c = h + z$) where z = altitude, h = height of cloudbase above flight level, x = ground distance, and α and β are angles relating z and h to x , respectively.

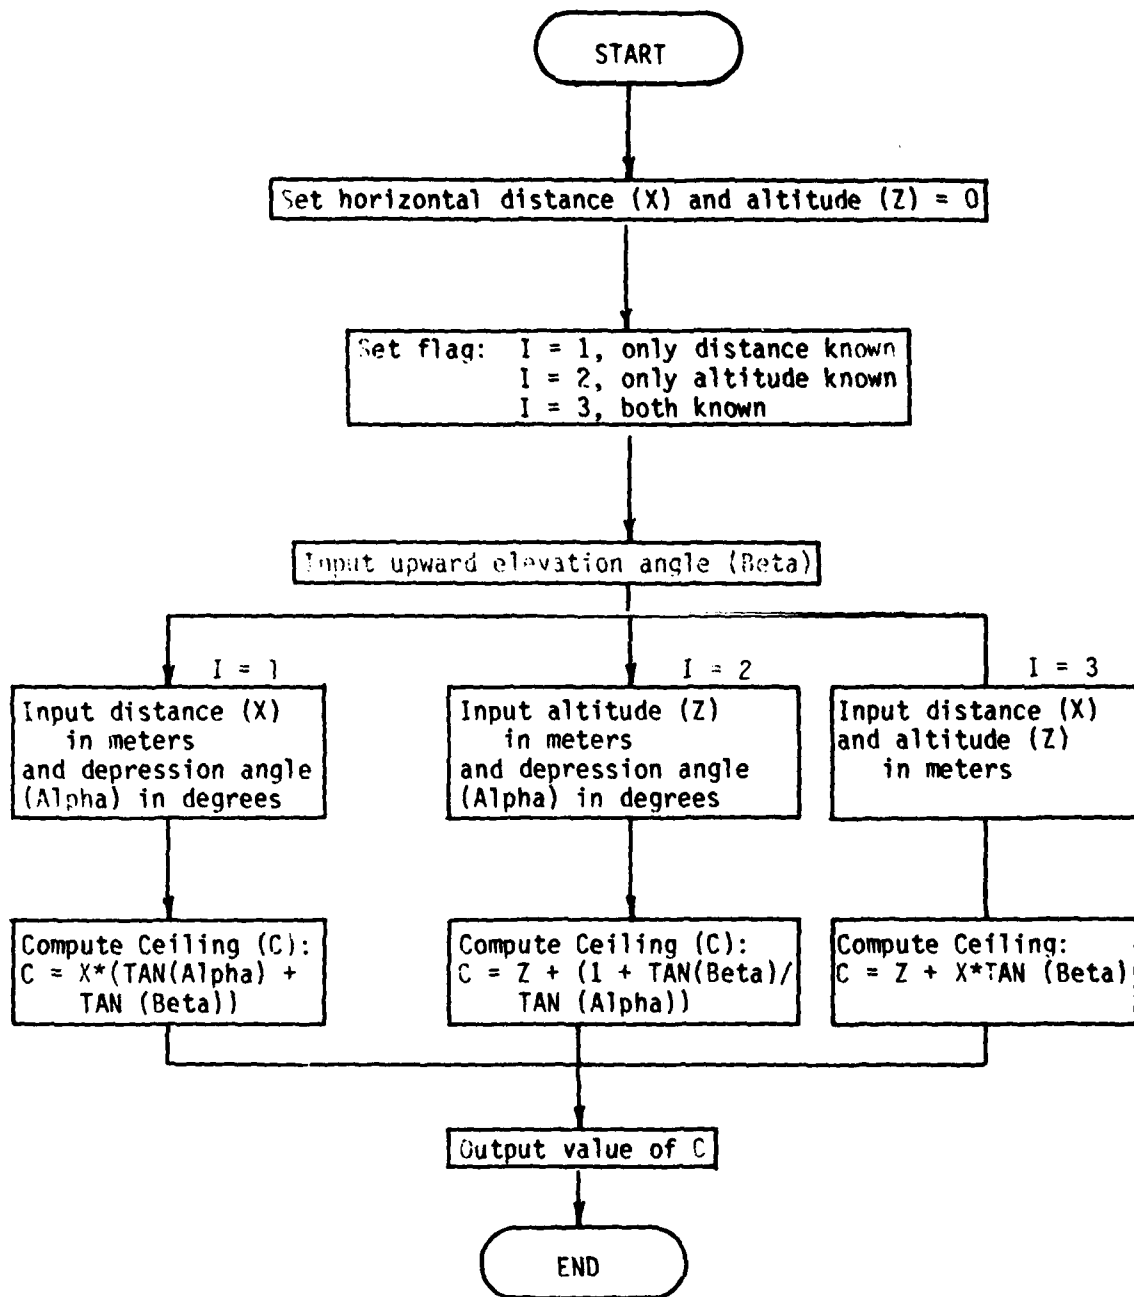


Figure 11. Flowchart for the estimation of ceiling.

$$\begin{array}{llll}
 X = 75 \text{ ms}^{-1} & D_x = 3000 \text{ m} & T_x = 30 \text{ s} & Dr_1 = 999^\circ \text{ (unknown)} \\
 Y = 90 \text{ ms}^{-1} & D_y = 3000 \text{ m} & T_y = 50 \text{ s} & Dr_2 = 285^\circ
 \end{array}$$

$$X_g = D_x / T_x = 100 \text{ ms}^{-1}$$

$$Y_g = D_y / T_y = 60 \text{ ms}^{-1}$$

$$C = X_g - X = 25 \text{ ms}^{-1}$$

$$D = Y_g - Y = -30 \text{ ms}^{-1}$$

$$V = (C^2 + D^2)^{1/2} = 39.1 \text{ ms}^{-1}$$

$$P = \arctan |C/D| = 39.8^\circ$$

$$Q = \arctan |D/C| = 50.2^\circ$$

$$Dr_1 = Dr_2 \pm 90^\circ = 195^\circ \text{ or } 375^\circ - 360^\circ = 15^\circ$$

$$(1) \text{ Dir} = Dr_2 - P = 245.2^\circ$$

$$(2) \text{ Dir} = Dr_2 + P = 324.8^\circ$$

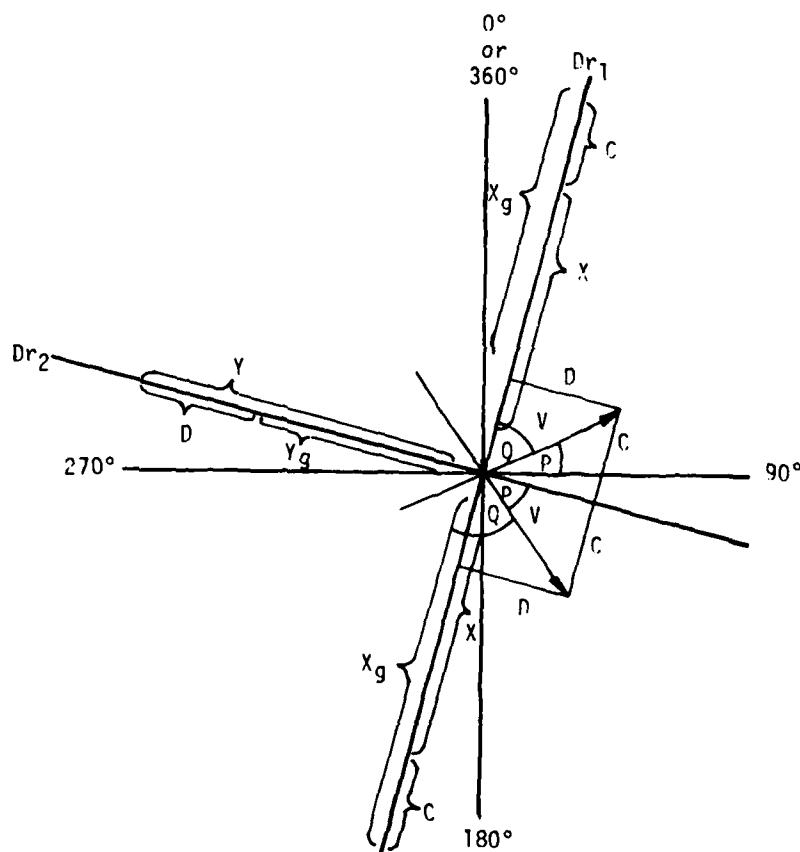


Figure 12. Use of method 1 to compute wind velocity. Variables are explained in figure 2 and first technique. Only Dr_2 is known, and $C > 0$ and $D < 0$. Two values of Dr_1 , X , X_g , V , P , Q , C , and D are shown because Dr_1 may be 15° or 195° . Two wind velocities (V) are computed.

$$\begin{array}{llll}
 X = 70 \text{ ms}^{-1} & D_x = 4000 \text{ m} & T_x = 68 \text{ s} & Dr_1 = 345^\circ \\
 Y = 80 \text{ ms}^{-1} & D_y = 5000 \text{ m} & T_y = 60 \text{ s} & Dr_2 = 255^\circ
 \end{array}$$

$$\begin{aligned}
 X_g &= D_x/T_x = 58.8 \text{ ms}^{-1} \\
 C &= X_g - X = -11.2 \text{ ms}^{-1}
 \end{aligned}$$

$$\begin{aligned}
 Y_g &= D_y/T_y = 83.3 \text{ ms}^{-1} \\
 D &= Y_g - Y = 3.3 \text{ ms}^{-1}
 \end{aligned}$$

$$V = (C^2 + D^2)^{1/2} = 11.7 \text{ ms}^{-1}$$

$$P = \arctan (C/D) = 73.6^\circ$$

$$Q = \arctan (D/C) = 16.4^\circ$$

$$\text{Dir} = Dr_1 + Q = 345 + 16.4 = 361.4 = 361.4 - 360 = 1.4^\circ$$

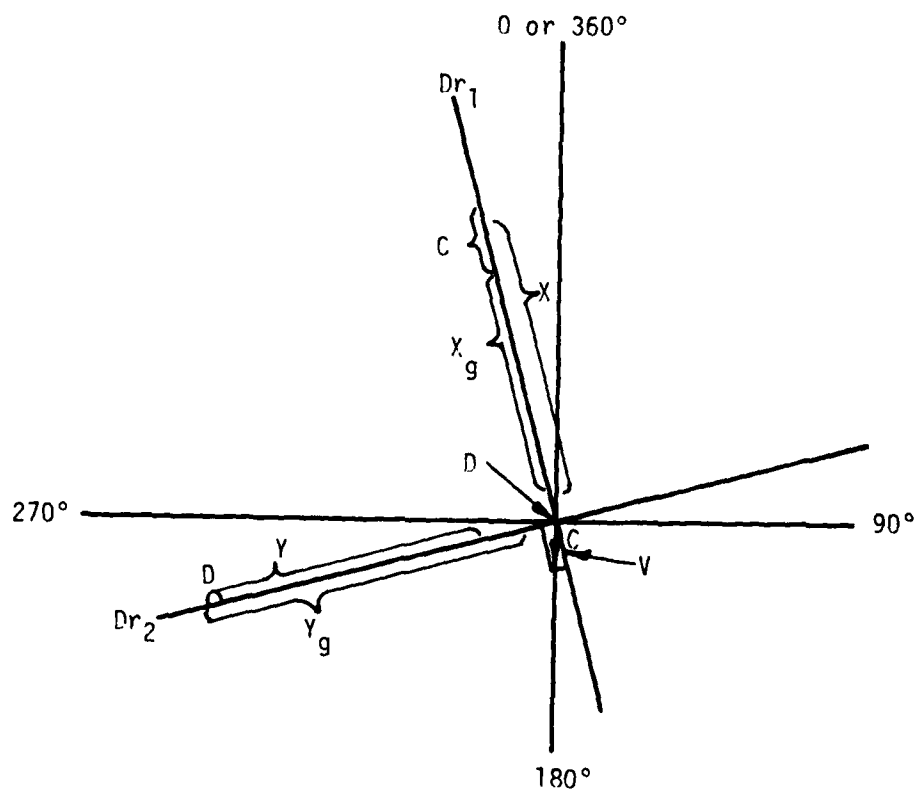


Figure 13. Use of method 1 to compute wind velocity when both Dr_1 and Dr_2 are known. Variables are explained in figure 2 and first technique. Here $C < 0$ and $D > 0$. The orientation of this figure is "left."

$$X = 69 \text{ ms}^{-1}$$

$$Y = 78 \text{ ms}^{-1}$$

$$A = 3^\circ$$

$$B = 10^\circ$$

$$Dr_1 = 90^\circ$$

$$Dr_2 = 360^\circ$$

$$I = -1$$

$$A = I \times A = -3^\circ$$

$$B = I \times B = -10^\circ$$

$$C = X \tan A = -3.6 \text{ ms}^{-1}$$

$$D = Y \tan B = -13.9^\circ \text{ ms}^{-1}$$

$$V = (C^2 + D^2)^{1/2} = 14.3 \text{ ms}^{-1}$$

$$P = \arctan |C/D| = 14.6^\circ$$

$$Q = \arctan |D/C| = 75.4^\circ$$

$$Dir = Dr_1 + P = 104.6^\circ$$

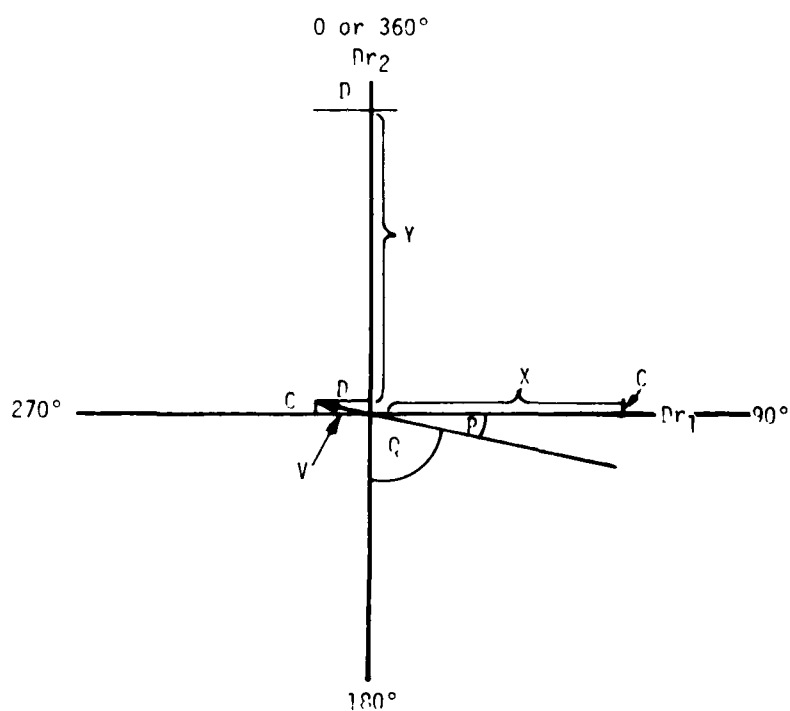


Figure 14. Use of method 2 to compute wind velocity when both Dr_1 and Dr_2 are known. Variables are explained in figure 4 and second technique. Both C and D are negative. The orientation of this figure is "left."

$$X = 50 \text{ ms}^{-1}$$

$$Y = 50 \text{ ms}^{-1}$$

$$A = -15^\circ$$

$$B = -25^\circ$$

$$Dr_1 = 245^\circ$$

$$Dr_2 = 999^\circ \text{ (unknown)}$$

$$I = -1$$

$$A = I \times A = 15^\circ$$

$$B = I \times B = 25^\circ$$

$$C = X \tan A = 13.4 \text{ ms}^{-1}$$

$$D = Y \tan B = 23.3 \text{ ms}^{-1}$$

$$V = (C^2 + D^2)^{1/2} = 26.9 \text{ ms}^{-1}$$

$$P = \arctan |C/D| = 29.9^\circ$$

$$Q = \arctan |D/C| = 60.1^\circ$$

$$Dr_2 = Dr_1 \pm 90^\circ = 335^\circ \text{ or } 155^\circ$$

$$(1) \text{ Dir} = Dr_1 - P = 215.1^\circ$$

$$(2) \text{ Dir} = Dr_1 + P + 180 = 454.9 - 360 = 94.9^\circ$$

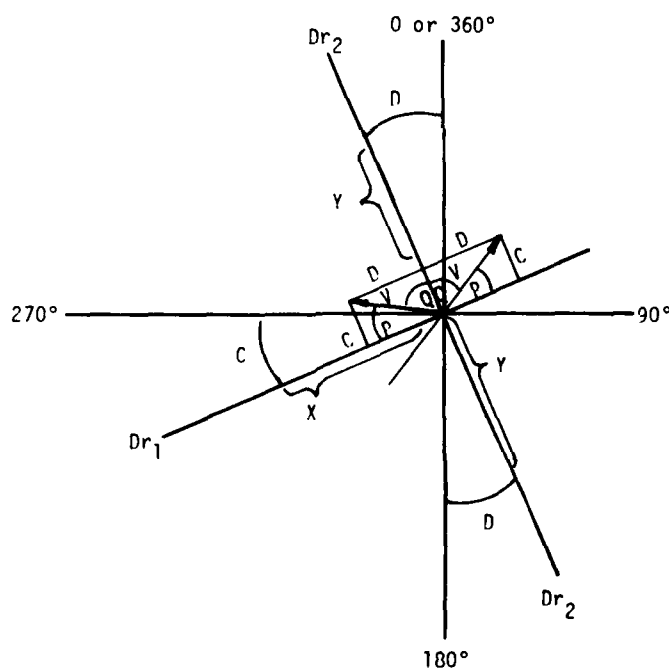


Figure 15. Use of method 2 to compute wind velocity. Variables are explained in figure 4 and second technique. Only Dr_1 is known, and C and D are both positive. More than one value of some variables is shown because Dr_2 may be 155° or 335° . Two wind velocities (V) are computed.

TABLE 1. COMPUTER OUTPUT FOR THE FOUR EXAMPLES OF FIGURES 12 THROUGH 15. AS NOTED IN THOSE FIGURES, TWO ANSWERS ARE GIVEN WHEN ONE HEADING IS UNKNOWN. THE MOST PROBABLE OF THE TWO WIND DIRECTIONS IS DETERMINED WITH THE AID OF OTHER DATA (FOR EXAMPLE, A SYNOPTIC CHART).

5 WIND VELOCITY	
Windspeed = 39.1 ms^{-1}	Wind direction = 245.2°
Windspeed = 39.1 ms^{-1}	Wind direction = 324.8°
ONE ANSWER IS CORRECT	
6 WIND VELOCITY	
Windspeed = 11.7 ms^{-1}	Wind direction = 1.6°
7 WIND VELOCITY	
Windspeed = 14.2 ms^{-1}	Wind direction = 104.7°
8 WIND VELOCITY	
Windspeed = 26.9 ms^{-1}	Wind direction = 215.1°
Windspeed = 26.9 ms^{-1}	Wind direction = 94.9°
ONE ANSWER IS CORRECT	

TABLE 2. SAMPLE COMPUTATIONS OF VOLUME EXTINCTION COEFFICIENT USING TECHNIQUE A WITH RADIANCE INPUT. k = VOLUME EXTINCTION COEFFICIENT, X = HORIZONTAL DISTANCE, Z = ALTITUDE, θ = ANGLE BETWEEN VERTICAL AND LOS TO TARGET, AND R AND R_1 = RADIANCES FROM THE TARGET WITH VERTICAL AND SLANT VIEWING, RESPECTIVELY. FOR THESE EXAMPLES $R = 100$ AND $R_1 = 25$ UNITS; THEREFORE, $R_1/R = 0.25$ and $\ln(R_1/R) = -1.3863$. NOTE THAT HERE AND IN THE COMPUTER PROGRAMS $R_1 = R_2$ OF EQUATION (3) AND $R = R_1$ OF EQUATION (3).

Known Variables	Equations and "Manual" Values	Computer Values
a) $X = 1000 \text{ m} = 1.0 \text{ km}$ $Z = 200 \text{ m} = 0.2 \text{ km}$	$\theta = \arctan(X/Z)$ $= 78.69^\circ$ $k = \ln R_1/R/Z(1 - 1/\cos \theta)$ $= -1.3863/0.2(1 - 5.0990)$ $= 1.6910 \text{ km}^{-1}$	 1.6910 km^{-1}
b) $Z = 300 \text{ m} = 0.3 \text{ km}$ $\theta = 65^\circ$	$k = -1.3863/Z(1 - 1/\cos \theta)$ $= -1.3863/0.3(1 - 2.3662)$ $= 3.3824 \text{ km}^{-1}$	 3.3824 km^{-1}
c) $X = 600 \text{ m} = 0.6 \text{ km}$ $\theta = 50^\circ$	$k = -1.3863/X(1/\tan \theta - 1/\sin \theta)$ $= -1.3863/0.6(0.8391 - 1.3054)$ $= 4.9550 \text{ km}^{-1}$	 4.9549 km^{-1}

Known Variables	Equations and "Manual" Values	Computer Values
a) $X_1 = 300 \text{ m} = 0.3 \text{ km}$ $X_2 = 1500 \text{ m} = 1.5 \text{ km}$ $Z = 500 \text{ m} = 0.5 \text{ km}$	$\beta_1 = \arctangent(X_1/Z) = 30.96^\circ$ $\beta_2 = \arctangent(X_2/Z) = 71.57^\circ$ $k = \ln(R_2/R_1)/Z(1/\cos \beta_1 - 1/\cos \beta_2)$ $= -1.2040/0.5(1.661 - 3.1631)$ $= 1.2058 \text{ km}^{-1}$	 1.2063 km^{-1}
b) $Z = 500 \text{ m} = 0.5 \text{ km}$ $\beta_1 = 20^\circ$ $\beta_2 = 70^\circ$	$k = -1.2040/0.5(1.0642 - 2.9238)$ $= 1.2949 \text{ km}^{-1}$	1.2949 km^{-1}
c) $X_1 = 200 \text{ m} = 0.2 \text{ km}$ $X_2 = 2000 \text{ m} = 2.0 \text{ km}$ $\beta_1 = 15^\circ$ $\beta_2 = 69.53^\circ$	$k = 1.2040/(X_1/\sin \beta_1 - X_2/\sin \beta_2)$ $= -1.2040/(0.727 - 2.1347)$ $= 0.8840 \text{ km}^{-1}$	0.8839 km^{-1}
d) $X_1 = 40 \text{ m} = 0.04 \text{ km}$ $X_2 = 1500 \text{ m} = 1.5 \text{ km}$ $\beta_1 = 3^\circ$ $\beta_2 = 63.03^\circ$	$k = -1.2040/X_2(1/\tan \beta_2 - 1/\sin \beta_2)$ $= -1.2040/1.5(0.5089 - 1.1220)$ $= 1.3091 \text{ km}^{-1}$	1.3090 km^{-1}

Known Variables	Equations and "Manual" Values	Computer Values
a) $X = 700 \text{ m}$ $Z = 150 \text{ m}$ $\beta = 22^\circ$	$c = Z + X \tan \beta$ $= 150 + 233$ $= 433 \text{ m}$	433 m
b) $Z = 300 \text{ m}$ $\beta = 14^\circ$ $\gamma = 10^\circ$	$c = Z (1 + \tan \beta / \tan \gamma)$ $= 300(1 + 0.24933/0.17633)$ $= 724 \text{ m}$	724 m
c) $X = 1000 \text{ m}$ $\alpha = 20^\circ$ $\gamma = 30^\circ$	$c = X(\tan \gamma + \tan \alpha)$ $= 1000(0.57735 + 0.36397)$ $= 941 \text{ m}$	941 m

TABLE 5. SAMPLES OF OUTPUT FROM THE COMPUTER PROGRAMS FOR CEILING AND VOLUME EXTINCTION COEFFICIENT. ONLY THE ANSWER (FOR EXAMPLE, Ceiling = 100 m) IS PRINTED BY THE COMPUTER. SINCE THE DESKTOP COMPUTER CANNOT PRINT SUPERSSCRIPTS, km^{-1} IS PRINTED AS 1/km.

1. Ceiling given altitude (Z) = 150 m, horizontal distance (X) = 700 m, and elevation angle (θ) = 22° .
Ceiling = 433 m
 2. Volume extinction coefficient using one slant path given Z = 200 m, X = 450 m, and radiances (R and R_1) = 110 and 25 units.
Volume extinction coefficient = 5.0663 1/km
 3. Volume extinction coefficient using two slant paths given horizontal distances (X_1 and X_2) = 200 and 1800 m, one of the two angles between the LOS to the target and the vertical (θ_1) = 18° , and radiances (R_1 and R_2) = 100 and 20 units.
Volume extinction coefficient = 1.2823 1/km
 4. Volume extinction coefficient using one slant path, and using voltages as input given Z = 200 m, X = 450 m, voltage coefficients (A and B) = 2.2 and 11.0, and voltages (V_1 and V_2) = 8.0 and 2.0 v.
Volume extinction coefficient = 4.4989 1/km
 5. Volume extinction coefficient using two slant paths, and using voltages as input given Z = 200 m, X_1 and X_2 = 200 and 450 m, θ_1 = 45° , A and B = 2.2 and 11.0, and V_1 and V_2 = 8.0 and 2.0 v.
Volume extinction coefficient = 6.2771 1/km
-

4. CONCLUSION

Useful tools for silent area analysis have been developed in the form of simple methods for the computation of wind velocity, ceiling, and volume extinction coefficient. These algorithms use information already gathered by an RPV of the type being developed for the Army; no new instrumentation is required. Windspeed should be accurate to several tenths of a meter per second and wind direction to less than a degree, assuming that the input is "perfectly" accurate. Similarly, ceiling should be correct to about 1 or 2 percent and extinction coefficient to about 10 percent. However, under operational conditions, the accuracy of the input data probably would determine the accuracy of the output.

Computations may be performed via a desktop computer able to use the BASIC computer language, or by the use of a hand-held calculator, a fine-scaled ruler, and graph paper. The former technique only requires the operator to input numbers that are specifically requested; the latter manual technique requires some knowledge of the situation.

APPENDIX

COMPUTER CODES IN BASIC FOR THE RPV PROGRAMS

(A) is the full version and (B) is the shortened version of the wind velocity program; (C) is the ceiling program; (D) and (E) are the extinction coefficient programs with one and two slant paths, respectively; (F) and (G) are the extinction coefficient programs using voltage inputs, with one and two slant paths, respectively.

(A)

```

10 !
20 ! COMPUTE WIND VELOCITY USING RPV PROGRAM
30 !
40 A$="Wind Speed = "
50 B$="Wind Direction = "
60 D$=" m/s"
70 E$=" Degrees"
80 F$="WIND VELOCITY"
90 N=0
100 M=0
110 INPUT "Input L=1 to compute V using Method 1 or L=2 for Method 2",L
120 IF L=2 THEN GOTO Meth
130 INPUT "Input airspeeds in m/s (X and Y)",X,Y
140 INPUT "Input distances(m) and times(s) (Dx,Tx,Dy,Ty)",Dx,Tx,Dy,Ty
150 INPUT "Input headings in degrees (Dr1 and Dr2)",Dr1,Dr2
160 PRINT USING Heading;F$
170 Heading: IMAGE 15X,13A,2/
180 GOTO Anda
190 Meth: INPUT "Input airspeeds in m/s (X and Y)",X,Y
200 INPUT "Input whether drift (I=1) or correction (I=-1) angle",I
210 INPUT "Input angles in degrees (A and B)",A,B
220 INPUT "Input headings in degrees (Dr1 and Dr2)",Dr1,Dr2
230 A=I*A
240 B=I*B
250 PRINT USING Heading;F$
260 GOTO Otra
270 Anda: CALL Comp1(X,Y,Dx,Tx,Dy,Ty,Dr1,Dr2,V,Dir,N)
280 GOTO Printer
290 Otra: CALL Comp2(X,Y,A,B,Dr1,Dr2,U,V,Dir,I,M)
300 Printer: PRINT USING Title;A$,V,D$,B$,Dir,E$
310 Title: IMAGE 5X,13A,DDD.D,4A,5X,17A,DDD.D,8A,/
320 IF N=1 THEN GOTO Anda
330 IF M=1 THEN GOTO Otra
340 IF (N=2) OR (M=2) THEN PRINT " ONE ANSWER IS CORRECT"
350 PRINT USING Out
360 Out: IMAGE 5X,6/
370 END
380 !
390 !
400 ! SUBPROGRAMS
410 !
420 !
430 SUB Comp1(X,Y,Dx,Tx,Dy,Ty,Dr1,Dr2,V,Dir,N)
440 !
450 Dir=0
460 DEG
470 L=0
480 Xg=Dx/Tx
490 Yg=Dy/Ty
500 C=Xg-X
510 D=Yg-Y
520 V=(C^2+D^2)^.5
530 IF C=0 THEN C=.001
540 IF D=0 THEN D=.001
550 !
560 ! Computation of Direction
570 !
580 P=ATN(ABS(C/D))
590 Q=ATN(ABS(D/C))
600 IF (C>0) AND (D>0) OR (C<0) AND (D<0) THEN L=1
610 Dron=Dr1
620 Drto=Dr2
630 IF Dr1=999 THEN GOTO Second ! Is Dr1 missing?
640 IF Dr2=999 THEN Drto=Dr1+90 ! Is Dr2 missing?
650 IF (Dr2=999) AND (N=1) THEN Drto=Dr1-90

```

```

660 IF Drto<0 THEN Drto=Drto+360
670 IF Drto>360 THEN Drto=Drto-360
680 IF (Dron<=90) AND (Drto>=270) AND (Drto<=360) THEN Dron=Dron+360
690 IF (Drto<=90) AND (Dron>=270) AND (Dron<=360) THEN Drto=Drto+360
700 Dir=Drl-Q ! Headwind
710 IF (Drto<Dron) AND (L=0) THEN Dir=Drl+Q
720 IF (Drto>Dron) AND (L=1) THEN Dir=Drl+Q
730 IF D>0 THEN Dir=Dir+180 ! Tailwind
740 GOTO Direct
750 Second: IF Dr2=999 THEN GOTO Alt ! Are Dr1 & Dr2 missing?
760 Dron=Dr2+90 ! Only Dr1 is missing
770 IF M=1 THEN Dron=Dr2-90
780 IF Dron<0 THEN Dron=Dron+360
790 IF Dron>360 THEN Dron=Dron-360
800 IF (Dron<=90) AND (Drto>=270) AND (Drto<=360) THEN Dron=Dron+360
810 IF (Drto<=90) AND (Dron>=270) AND (Dron<=360) THEN Drto=Drto+360
820 Dir=Dn2+P ! Headwind
830 IF (Drto<Dron) AND (L=0) THEN Dir=Dn2-P
840 IF (Drto>Dron) AND (L=1) THEN Dir=Dn2-P
850 IF D>0 THEN Dir=Dir+180 ! Tailwind
860 GOTO Direct
870 Alt: PRINT "NO DIRECTION GIVEN OR COMPUTED"
880 Direct: IF Dir>360 THEN Dir=Dir-360
890 IF Dir<0 THEN Dir=Dir+360
900 IF (Drl=999) OR (Dr2=999) THEN N=N+1
910 SUBEND
920 !
930 !
940 SUB Comp2(X,Y,A,B,Drl,Dr2,U,V,Dir,L,M)
950 !
960 Dir=0
970 K=0
980 U=0
990 DEG
1000 C=X*TAN(A)
1010 D=Y*TAN(B)
1020 V=(C^2+D^2)^(.5)
1030 IF C=0 THEN C=.001
1040 IF D=0 THEN D=.001
1050 !
1060 ! Computation of Direction
1070 !
1080 P=ATN(ABS(C/D))
1090 Q=ATN(ABS(D/C))
1100 IF (C>0) AND (D>0) OR (C<0) AND (D<0) THEN K=1
1110 Dron=Drl
1120 Drto=Dr2
1130 IF Dr1=999 THEN GOTO Second ! Is Dr1 missing?
1140 IF Dr2=999 THEN Drto=Drl+90 ! Is Dr2 missing?
1150 IF (Dr2=999) AND (M=1) THEN Drto=Drl-90
1160 IF Drto<0 THEN Drto=Drto+360
1170 IF Drto>360 THEN Drto=Drto-360
1180 IF (Dron<=90) AND (Drto>=270) AND (Drto<=360) THEN Dron=Dron+360
1190 IF (Drto<=90) AND (Dron>=270) AND (Dron<=360) THEN Drto=Drto+360
1200 IF (D>0) AND (Dron>Drto) THEN U=1 ! Test for tailwind
1210 IF (D<0) AND (Dron<Drto) THEN U=1 ! Test for tailwind
1220 Dir=Drl-P ! Headwind
1230 IF (Dron>Drto) AND (K=1) THEN Dir=Drl+P
1240 IF (Dron<Drto) AND (K=0) THEN Dir=Drl+P
1250 IF U=1 THEN Dir=Dir+180 ! Tailwind
1260 GOTO Direct
1270 Second: IF Dr2=999 THEN GOTO Alt ! Are Dr1 & Dr2 missing?
1280 Dron=Dr2+90 ! Only Dr1 is missing
1290 IF M=1 THEN Dron=Dr2-90
1300 IF Dron<0 THEN Dron=Dron+360
1310 IF Dron>360 THEN Dron=Dron-360

```

```

1320 IF (Drone<90) AND (Drto<90) AND (Drto>45) THEN Dir=Dir-45
1330 IF (Drto<90) AND (Drone<270) AND (Drone>360) THEN Dir=Dir+45
1340 IF (C<0) AND (Drone>Drto) THEN Dir=Dir-45
1350 IF (C>0) AND (Drone>Drto) THEN Dir=Dir+45
1360 Dir=Dr2+0
1370 IF (Drone>Drto) AND (K#1) THEN Dir=Dr2-0
1380 IF (Drone>Drto) AND (K#0) THEN Dir=Dr2+0
1390 IF U#1 THEN Dir=Dir+180
1400 GOTO Direct
1410 Alt: PRINT "NO DIRECTION GIVEN OR COMPUTED"
1420 Direct: IF Dir>360 THEN Dir=Dir-360
1430 IF Dir<0 THEN Dir=Dir+360
1440 IF (Dr1=999) OR (Dr2=999) THEN REM41
1450 SUBEND

```

```

10 !
20 ! COMPUTE WIND VELOCITY USING RPV PROGRAM - MINI VERSION
30 !
40 A$="Wind Speed = "
50 B$="Wind Direction = "
60 D$=" m/s"
70 E$=" Degrees"
80 F$="WIND VELOCITY"
90 INPUT "Input L=1 to compute V using Method 1 or L=2 for Method 2",L
100 IF L=2 THEN GOTO Meth
110 INPUT "Input airspeeds in m/s (X and Y)",X,Y
120 INPUT "Input distances(m) and times(s) (Dx,Tx,Dy,Ty)",Dx,Tx,Dy,Ty
130 INPUT "Input headings in degrees (Dr1 and Dr2)",Dr1,Dr2
140 PRINT USING Heading;F$
150 Heading: IMAGE 15X,13A,2/
160 GOTO Anda
170 Meth: INPUT "Input airspeeds in m/s (X and Y)",X,Y
180 INPUT "Input whether drift (I=1) or correction (I=-1) angle",I
190 INPUT "Input angles in degrees (A and B)",A,B
200 INPUT "Input headings in degrees (Dr1 and Dr2)",Dr1,Dr2
210 A=I*A
220 B=I*B
230 PRINT USING Heading;F$
240 GOTO Otra
250 Anda: CALL Comp1(X,Y,Dx,Tx,Dy,Ty,Dr1,Dr2,V,Dir)
260 GOTO Printer
270 Otra: CALL Comp2(X,Y,A,B,Dr1,Dr2,U,V,Dir,I)
280 Printer: PRINT USING Title;A$,V,D$,B$,Dir,E$
290 Title: IMAGE 5X,13A,DDD.D,4A,5X,17A,DDD.D,8A,/
300 PRINT USING Out
310 Out: IMAGE 5X,6/
320 END
330 !
340 !
350 ! SUBPROGRAMS
360 !
370 !
380 SUB Comp1(X,Y,Dx,Tx,Dy,Ty,Dr1,Dr2,V,Dir)
390 !
400 Dir=0
410 DEG
420 L=0
430 Xg=Dx/Tx
440 Yg=Dy/Ty
450 C=Xg-X
460 D=Yg-Y
470 V=(C^2+D^2)^.5
480 IF C=0 THEN C=.001
490 IF D=0 THEN D=.001
500 !
510 ! Computation of Direction
520 !
530 Q=ATN(ABS(D/C))
540 IF (C>0) AND (D>0) OR (C<0) AND (D<0) THEN L=1
550 Dron=Dr1
560 Drto=Dr2
570 IF (Dron<=90) AND (Drto)=270) AND (Drto<=360) THEN Dron=Dron+360
580 IF (Drto<=90) AND (Dron)=270) AND (Dron<=360) THEN Drto=Drto+360
590 Dir=Dr1-Q ! Headwind
600 IF (Drto<Dron) AND (L=0) THEN Dir=Dr1+Q
610 IF (Drto>Dron) AND (L=1) THEN Dir=Dr1+Q
620 IF C>0 THEN Dir=Dir+180 ! Tailwind
630 IF Dir>360 THEN Dir=Dir-360
640 IF Dir<0 THEN Dir=Dir+360
650 SUBEND

```

```

660 !
670 !
680 SUB Comp2(X,Y,A,B,Dr1,Dr2,U,V,Dir,I)
690 !
700 Dir=0
710 K=0
720 U=0
730 DEG
740 C=X*TAN(A)
750 D=Y*TAN(B)
760 V=(C^2+D^2)^.5
770 IF C=0 THEN C=.001
780 IF D=0 THEN D=.001
790 !
800 !      Computation of Direction
810 !
820 P=ATN(ABS(C/D))
830 IF (C>0) AND (D>0) OR (C<0) AND (D<0) THEN K=1
840 Dron=Dr1
850 Drto=Dr2
860 IF (Dron<=90) AND (Drto>=270) AND (Drto<=360) THEN Dron=Dron+360
870 IF (Drto<=90) AND (Dron>=270) AND (Dron<=360) THEN Drto=Drto+360
880 IF (D>0) AND (Dron>Drto) THEN U=1      ! Test for tailwind
890 IF (D<0) AND (Dron<Drto) THEN U=1      ! Test for tailwind
900 Dir=Dr1-P      ! Headwind
910 IF (Dron>Drto) AND (K=1) THEN Dir=Dr1+P
920 IF (Dron<Drto) AND (K=0) THEN Dir=Dr1+P
930 IF U=1 THEN Dir=Dir+180      ! Tailwind
940 IF Dir>360 THEN Dir=Dir-360
950 IF Dir<0 THEN Dir=Dir+360
960 SUBEND

```

(C)

```

10  '
20  ' ESTIMATION OF CEILING (STORED AS "RPWCEL")
30  '
40  ' INPUT
50  '
60  DEG
70  DATA 0,0
80  READ X,Z
90  A$="Ceiling = "
100 B$=" meters"
110 INPUT "Set I=1 if distance known, I=2 if altitude known, I=3 if both known"
120 INPUT "Input upward elevation angle (Beta) in degrees",Beta
130 ON I GOTO In1,In2,In3
140 In1: INPUT "Input distance (X) in meters & depression angle (Alpha) in degrees",X,Alpha
150 GOTO Comp1
160 In2: INPUT "Input altitude (Z) in meters & depression angle (Alpha) in degrees",Z,Alpha
170 GOTO Comp2
180 In3: INPUT "Input distance (X) & altitude (Z) in meters",X,Z
190 GOTO Comp3
200 Comp1: C=X*(TAN(Alpha)+TAN(Beta))
210 GOTO Out
220 Comp2: C=Z*(1+TAN(Beta)/TAN(Alpha))
230 GOTO Out
240 Comp3: C=Z+X*TAN(Beta)
250 Out: PRINT USING Title;A$,C,B$
260 Title: IMAGE 0.5X,10A,50.7A,77
270 END

```

```

10  !
20  !      ESTIMATION OF EXTINCTION COEFFICIENT      *STORED AS "RPXPHD"
30  !
40  !      INPUT
50  !
60  DATA 0,0
70  READ X,Z
80  INPUT "Set I=1 if distance known, I=2 if altitude known, I=3 if both known"
90  !
100 ON I GOTO In1,In2,In3
110 In1: INPUT "Input value of distance (X) in meters" X
120 In2: INPUT "Input value of altitude (Z) in meters" Z
130 In3: INPUT "Input distance (X) and altitude (Z) in meters",X,Z
140 In3: INPUT "Input distance (X) and altitude (Z) in meters",X,Z
150 GOTO In
160 Angle: INPUT "Input angle (Beta) between vertical and slant paths in degrees",Beta
170 In: INPUT "Input vertical and slant path radiances (R,P) : R,P1 in any standard units",R,R1
180 !
190 !      COMPUTATION
200 !
210 DEG
220 DIM A$(32)
230 X=X/1000
240 Z=Z/1000
250 A$="Volume extinction coefficient = "
260 B$=" 1/km"
270 IF I=3 THEN Beta=ATN(X/Z)
280 Alpha=LOG(R1/R)
290 IF Z=0 THEN GOTO Dist
300 Alpha=Alpha/(Z*(1-1/COS(Beta)))
310 GOTO Out
320 Dist: Alpha=Alpha/(X*(1/TAN(Beta)-1/SIN(Beta)))
330 !
340 !      OUTPUT
350 !
360 Out: PRINT USING Title;A$,Alpha;B$
370 Title: IMAGE 0,5X,32H,00.0000 6H,17
380 END

```

E

```

10  |
20  | ESTIMATION OF EXTINCTION COEFFICIENT      STORED AS "RADREFV"
30  | USING TWO SLANT PATHS
40  |
50  | INPUT
60  |
70  DATA 0,0,0
80  READ X1,X2,Z
90  INPUT "Set I=1 if distances known, I=2 if altitude known, I=3 if both known
    | I
100 ON I GOTO In1,In2,In3
110 In1: INPUT "Input values of distances (X1,X2 where X1<X2) in meters",X1,X2
120 GOTO Angle
130 In2: INPUT "Input value of altitude (Z) in meters",Z
140 GOTO Angle
150 In3: INPUT "Input distances (X1,X2 where X1<X2) and altitude (Z) in meters"
    | X1,X2,Z
160 GOTO In
170 Angle: INPUT "Input angles (B1,B2 where B1<B2) between vertical and slant
    | paths in degrees",B1,B2
180 In: INPUT "Input slant path radiances (R1,R2 where R1>R2) in any standard u
    | nits",R1,R2
190 |
200 | COMPUTATION
210 |
220 DEG
230 DIM A$(32)
240 X1=X1/1000
250 X2=X2/1000
260 Z=Z/1000
    | Change units to kilometers
270 A$="Volume extinction coefficient = "
280 B$=" 1/km"
290 IF I<>3 THEN GOTO Alf
300 B1=ATN(X1/Z)
310 B2=ATN(X2/Z)
320 Alf: Alpha=LOG(R2/R1)
330 IF Z=0 THEN GOTO Dist
340 Alpha=Alpha/(2*(1/COS(B1)-1/COS(B2)))
350 GOTO Out
360 Dist: IF B1<>0 THEN GOTO Bet
370 Z=X2/TAN(B2)
380 B1=ATN(X1/Z)
390 Bet: IF B2<>0 THEN GOTO Go
400 Z=X1/TAN(B1)
410 B2=ATN(X2/Z)
420 Go: IF B1<5 THEN GOTO Small
430 Alpha=Alpha*(X1/SIN(B1)-X2/SIN(B2))
440 GOTO Out
450 Small: Alpha=Alpha*(X2*(1/TAN(B1)-1/SIN(B2)))
460 |
470 | OUTPUT
480 |
490 Out: PRINT USING Title:A$,Alpha,B$
500 Title: IMAGE @,5X,32H,00.0000,50.7Z
510 END

```

(F)

```

10  !
20  ! ESTIMATION OF EXTINCTION COEFFICIENT   STORED AS "PPVOLT"
30  ! USING VOLTAGES AS INPUT
40  !
50  ! INPUT
60  !
70  DATA 0,0
80  READ X,Z
90  INPUT "Set I=1 if distance known, I=2 if altitude known, I=3 if both known"
  I
100 ON I GOTO In1,In2,In3
110 In1: INPUT "Input value of distance (X) in meters",X
120 GOTO Angle
130 In2: INPUT "Input value of altitude (Z) in meters",Z
140 GOTO Angle
150 In3: INPUT "Input distance (X) and altitude (Z) in meters",X,Z
160 GOTO In
170 Angle: INPUT "Input angle (Beta) between vertical and slant paths in degrees",Beta
180 In: CALL Volt(R1,R2,V1,V2,A,B)
190 !
200 ! COMPUTATION
210 !
220 DEG
230 DIM A$(32)
240 X=X/1000 ! Change units to kilometers
250 Z=Z/1000 !
260 A$="Volume extinction coefficient = "
270 B$=" 1/km"
280 IF I=3 THEN Beta=ATN(X/Z)
290 Alpha=LOG(R2/R1)
300 IF Z=0 THEN GOTO Dist
310 Alpha=Alpha/(Z*(1-1/COS(Beta)))
320 GOTO Out
330 Dist: Alpha=Alpha/(X*(1/TAN(Beta)-1/SIN(Beta)))
340 !
350 ! OUTPUT
360 !
370 Out: PRINT USING Title;A$,Alpha,B$
380 Title: IMAGE 0.5X.32A.00.DDDD.6A.2/
390 END
400 !
410 ! SUBPROGRAM TO CONVERT VOLTAGE TO RADIANCE
420 !
430 SUB Volt(R1,R2,V1,V2,A,B)
440 INPUT "Input voltage coefficients (A,B)",A,B
450 INPUT "Input voltages for vertical and slant paths (V1,V2 where V1=V2)",V1,V2
460 R1=A+B*V1
470 R2=A+B*V2
480 SUBEND

```

```

100 ESTIMATION OF EXTINCTION COEFFICIENT      AT REL HS 700/16
101 USING TWO SLANT PATHS AND VOLTAGES
102 HS INPUT
103
104 INPUT
105
106 LATH 0.010
107 REHD 31.4212
108 INPUT "Set 1st slant path distance in km (0.000 to 10.000) : "
109 I
110 ON I GOTO 101,102,107
111 101: INPUT "Input value of slant path distance in km : "
112 102: GOTO Angle
113 103: INPUT "Input value of altitude in km (0.000 to 10.000) : "
114 104: GOTO Angle
115 105: INPUT "Input distance in km (0.000 to 10.000) : "
116 106: GOTO In
117 107: INPUT "Input value of slant path distance in km (0.000 to 10.000) : "
118 paths in degrees? B1 B2
119 In: CALL Volt=1 R1=1.2+0.5
120
121 COMPUTATION
122
123 DEG
124 DIM H$(32)
125 I=1:1000
126 J=1:1000
127 T=0:1000
128 H$="Volume extinction coefficient"
129 C$="1 km"
130 IF I=2 THEN GOTO H1
131 B1=ATN(X1/2)
132 B2=ATN(X2/2)
133 H1: Alpha=LOG(P2/P1)
134 IF C=0 THEN GOTO Dist
135 Alpha=Alpha+1.761*1000*B1+1.761*1000*B2
136 GOTO Out
137 Dist: IF B1=0 THEN GOTO B1+
138 C=12: TAN B2
139 B1=ATN(X1/2)
140 B2: IF B2=0 THEN GOTO C
141 C=Y1: TAN B1
142 B2=ATN(X2/2)
143 G: IF B1=5 THEN GOTO Small
144 Alpha=Alpha+1.761*SIN B1+1.761*SIN B2
145 GOTO Out
146 Small: Alpha=Alpha+1.761*SIN B1+1.761*SIN B2
147
148 OUTPUT
149
150 Out: PRINT USING Title # Alpha B1
151 Title: IMAGE # 50.304 00 0000 #
152 END
153
154 SUBPROGRAM TO CONVERT VOLTAGE TO RADIATION
155
156 SUB Volt P1 P2 V1 TO H1 B1
157 INPUT "Input voltage coefficients in B1 H1"
158 INPUT "Input voltages for both slant paths in V1 V2"
159 P1=H1*V1
160 P2=H1*V2
161 RETURN

```

DISTRIBUTION LIST

Commander
US Army Aviation Center
ATTN: ATZQ-D-MA
Fort Rucker, AL 36362

John M. Hobbie
c/o Kentron International
2003 Byrd Spring Road
Huntsville, AL 35807

Chief, Atmospheric Sciences Div
Code ES-81
NASA
Marshall Space Flight Center, AL 35812

Commander
US Army Missile Command
ATTN: DRDMI-RRA/Dr. O. M. Essenwanger
Redstone Arsenal, AL 35809

Commander
US Army Missile Command
ATTN: DRSMI-OG (B. W. Fowler)
Redstone Arsenal, AL 35809

Commander
US Army Missile R&D Command
ATTN: DRDMI-TEM (R. Haraway)
Redstone Arsenal, AL 35809

Redstone Scientific Information Center
ATTN: DRSMI-RPRD (Documents)
US Army Missile Command
Redstone Arsenal, AL 35809

Commander
HQ, Fort Huachuca
ATTN: Tech Ref Div
Fort Huachuca, AZ 85613

Commander
US Army Intelligence
Center & School
ATTN: ATSI-CD-MD
Fort Huachuca, AZ 85613

Commander
US Army Yuma Proving Ground
ATTN: Technical Library
Bldg 2105
Yuma, AZ 85364

Dr. Frank D. Eaton
Geophysical Institute
University of Alaska
Fairbanks, AK 99701

Naval Weapons Center
Code 3918
ATTN: Dr. A. Shlanta
China Lake, CA 93555

Commanding Officer
Naval Envir Prediction Rsch Facility
ATTN: Library
Monterey, CA 93940

Sylvania Elec Sys Western Div
ATTN: Technical Reports Lib
PO Box 205
Mountain View, CA 94040

Tetra Tech Inc.
ATTN: L. Baboolal
630 N. Rosemead Blvd.
Pasadena, CA 91107

Geophysics Officer
PMTIC Code 3250
Pacific Missile Test Center
Point Mugu, CA 93042

Commander
Naval Ocean Systems Center
(Code 4473)
ATTN: Technical Library
San Diego, CA 92152

Meteorologist in Charge
Kwajalein Missile Range
PO Box 67
APO San Francisco, CA 96555

Director
NOAA/ERL/APCL R31
RB3-Room 567
Boulder, CO 80302

Library-R-51-Tech Reports
NOAA/ERL
320 S. Broadway
Boulder, CO 80303

National Center for Atmos Rsch
Mesa Library
P. O. Box 3000
Boulder, CO 80307

Dr. B. A. Silverman D-1200
Office of Atmos Resources Management
Water and Power Resources Service
PO Box 25007
Denver Federal Center, Bldg. 67
Denver, CO 80225

Hugh W. Albers (Executive Secretary)
CAO Subcommittee on Atmos Rsch
National Science Foundation Room 510
Washington, DC 2055

Dr. Eugene W. Bierly
Director, Division of Atmos Sciences
National Science Foundation
1800 G Street, N.W.
Washington, DC 20550

Commanding Officer
Naval Research Laboratory
Code 2627
Washington, DC 20375

Defense Communications Agency
Technical Library Center
Code 222
Washington, DC 20305

Director
Naval Research Laboratory
Code 5530
Washington, DC 20375

Dr. J. M. MacCallum
Naval Research Laboratory
Code 1409
Washington, DC 20375

HQDA (DAMI-ISP/H. Tax)
Washington, DC 20314

HQDA (DAEN-RDM/Dr. de Percin)
Washington, DC 20314

The Library of Congress
ATTN: Exchange & Gift Div
Washington, DC 20540

2

Mil Asst for Atmos Sci Ofc of
the Undersecretary of Defense
for Rsch & Engr/E&LS - RM 3D129
The Pentagon
Washington, DC 20301

Dr. John L. Walsh
Code 6534
Navy Research Lab
Washington, DC 20375

AFATL/DLODL
Technical Library
Eglin AFB, FL 32542

Naval Training Equipment Center
ATTN: Technical Information Center
Orlando, FL 32813

Technical Library
Chemical Systems Laboratory
Aberdeen Proving Ground, MD 21010

US Army Materiel Systems
Analysis Activity
ATTN: DRXSY-MP
APG, MD 21005

Commander
ERADCOM
ATTN: DRDEL-PA/ILS/-ED
2800 Powder Mill Road
Adelphi, MD 20783

Commander
ERADCOM
ATTN: DRDEL-PAO (M. Singleton)
2800 Powder Mill Road
Adelphi, MD 20783

Commander
ERADCOM
ATTN: DRDEL-ST-T (Dr. B. Zarwyn)
2800 Powder Mill Road
Adelphi, MD 20783
02

Commander
Harry Diamond Laboratories
ATTN: DELHD-CO
2800 Powder Mill Road
Adelphi, MD 20783

Chief
Intel Mat Dev & Spt Ofc
ATTN: DELEW-WL-I
Bldg 4554
Fort George G. Mead, MD 20755

Acquisitions Section, IRDB-D823
Library & Info Svc Div, NOAA
6009 Executive Blvd.
Rockville, MD 20752

Naval Surface Weapons Center
White Oak Library
Silver Spring, MD 20910

Air Force Geophysics Laboratory
ATTN: LCC (A. S. Carten, Jr.)
Hanscom AFB, MA 01731

Air Force Geophysics Laboratory
ATTN: LYD
Hanscom AFB, MA 01731

Meteorology Division
AFGL/LY
Hanscom AFB, MA 01731

The Environmental Research
Institute of MI
ATTN: IRIA Library
PO Box 8618
Ann Arbor, MI 48107

Mr. William A. Main
USDA Forest Service
1407 S. Harrison Road
East Lansing, MI 48823

Dr. A. D. Belmont
Research Division
PO Box 1249
Control Data Corp
Minneapolis, MN 55440

Commander
Naval Oceanography Command
Bay St. Louis, MS 39529

Commanding Officer
US Army Armament R&D Command
ATTN: DRDAR-TSS Bldg 59
Dover, NJ 07801

Commander
ERADCOM Scientific Advisor
ATTN: DRDEL-SA
Fort Monmouth, NJ 07703

Commander
ERADCOM Tech Support Activity
ATTN: DELSD-L
Fort Monmouth, NJ 07703

Commander
HQ, US Army Avionics R&D Actv
ATTN: DAVAA-0
Fort Monmouth, NJ 07703

Commander
USA Elect Warfare Lab
ATTN: DELEW-DA (File Cy)
Fort Monmouth, NJ 07703

Commander
US Army Electronics R&D Command
ATTN: DELCS-S
Fort Monmouth, NJ 07703

Commander
US Army Satellite Comm Agency
ATTN: DRCPM-SC-3
Fort Monmouth, NJ 07703

Commander/Director
US Army Combat Survl & Target
Acquisition Laboratory
ATTN: DELCS-D
Fort Monmouth, NJ 07703

Director
Night Vision & Electro-Optics Laboratory
ATTN: DELNV-L (Dr. R. Buser)
Fort Belvoir, VA 22060

Project Manager
FIREFINDER/REMBASS
ATTN: DRCPM-FFR-TM
Fort Monmouth, NJ 07703

6585 TG/WE
Holloman AFB, NM 88330

AFWL/Technical Library (SUL)
Kirtland AFB, NM 87117

AFWL/WE
Kirtland, AFB, NM 87117

TRASANA
ATTN: ATAA-SL (D. Anguiano)
WSMR, NM 88002

Commander
US Army White Sands Missile Range
ATTN: STEWS-PT-AL
White Sands Missile Range, NM 88002

Rome Air Development Center
ATTN: Documents Library
TSLD (Bette Smith)
Griffiss AFB, NY 13441

Environmental Protection Agency
Meteorology Laboratory, MD 80
Rsch Triangle Park, NC 27711

US Army Research Office
ATTN: DRXRO-PP
PO Box 12211
Rsch Triangle Park, NC 27709

Commandant
US Army Field Artillery School
ATTN: ATSF-CD-MS (Mr. Farmer)
Fort Sill, OK 73503

Commandant
US Army Field Artillery School
ATTN: ATSF-CF-R
Fort Sill, OK 73503

Commandant
US Army Field Artillery School
ATTN: Morris Swett Library
Fort Sill, OK 73503

Commander
US Army Dugway Proving Ground
ATTN: STEDP-MT-DA-M
(Mr. Paul Carlson)
Dugway, UT 84022

Commander
US Army Dugway Proving Ground
ATTN: MT-DA-L
Dugway, UT 84022

US Army Dugway Proving Ground
ATTN: STEDP-MT-DA-T
(Dr. W. A. Peterson)
Dugway, UT 84022

Inge Dirmhirn, Professor
Utah State University, UMC 48
Logan, UT 84322

Defense Technical Information Center
ATTN: DTIC-DDA-2
Cameron Station, Bldg. 5
Alexandria, VA 22314
12

Commanding Officer
US Army Foreign Sci & Tech Cen
ATTN: DRXST-IS1
220 7th Street, NE
Charlottesville, VA 22901

Naval Surface Weapons Center
Code G65
Dahlgren, VA 22448

Commander
US Army Night Vision
& Electro-Optics Lab
ATTN: DELNV-D
Fort Belvoir, VA 22060

Commander
USATRADOC
ATTN: ATCD-FA
Fort Monroe, VA 23651

Commander
USATRADOC
ATTN: ATCD-IR
Fort Monroe, VA 23651

Dept of the Air Force
5WW/DN
Langley AFB, VA 23665

US Army Nuclear & Cml Agency
ATTN: MONA-WE
Springfield, VA 22150

Director
US Army Signals Warfare Lab
ATTN: DELSW-OS (Dr. Burkhardt)
Vint Hill Farms Station
Warrenton, VA 22186

Commander
US Army Cold Regions Test Cen
ATTN: STECR-OP-PM
APO Seattle, WA 98733

ATMOSPHERIC SCIENCES RESEARCH REPORTS

1. Lindberg, J. D. "An Improvement to a Method for Measuring the Absorption Coefficient of Atmospheric Dust and other Strongly Absorbing Powders," ECOM-5565, July 1975.
2. Avara, Elton P., "Mesoscale Wind Shears Derived from Thermal Winds," ECOM-5566, July 1975.
3. Gomez, Richard B., and Joseph H. Pierluissi, "Incomplete Gamma Function Approximation for King's Strong-Line Transmittance Model," ECOM-5567, July 1975.
4. Blanco, A. J., and B. F. Engebos, "Ballistic Wind Weighting Functions for Tank Projectiles," ECOM-5568, August 1975.
5. Taylor, Fredrick J., Jack Smith, and Thomas H. Pries, "Crosswind Measurements through Pattern Recognition Techniques," ECOM-5569, July 1975.
6. Walters, D. L., "Crosswind Weighting Functions for Direct-Fire Projectiles," ECOM-5570, August 1975.
7. Duncan, Louis D., "An Improved Algorithm for the Iterated Minimal Information Solution for Remote Sounding of Temperature," ECOM-5571, August 1975.
8. Robbiani, Raymond L., "Tactical Field Demonstration of Mobile Weather Radar Set AN/TPS-41 at Fort Rucker, Alabama," ECOM-5572, August 1975.
9. Miers, B., G. Blackman, D. Langer, and N. Lorimier, "Analysis of SMS/GOES Film Data," ECOM-5573, September 1975.
10. Manquero, Carlos, Louis Duncan, and Rufus Bruce, "An Indication from Satellite Measurements of Atmospheric CO₂ Variability," ECOM-5574, September 1975.
11. Petracca, Carmine, and James D. Lindberg, "Installation and Operation of an Atmospheric Particulate Collector," ECOM-5575, September 1975.
12. Avara, Elton P., and George Alexander, "Empirical Investigation of Three Iterative Methods for Inverting the Radiative Transfer Equation," ECOM-5576, October 1975.
13. Alexander, George D., "A Digital Data Acquisition Interface for the SMS Direct Readout Ground Station - Concept and Preliminary Design," ECOM-5577, October 1975.
14. Cantor, Israel, "Enhancement of Point Source Thermal Radiation Under Clouds in a Nonattenuating Medium," ECOM-5578, October 1975.

15. Norton, Colburn, and Glenn Hoidale, "The Diurnal Variation of Mixing Height by Month over White Sands Missile Range, NM," ECOM-5579, November 1975.
16. Avara, Elton P., "On the Spectrum Analysis of Binary Data," ECOM-5580, November 1975.
17. Taylor, Fredrick J., Thomas H. Pries, and Chao-Huan Huang, "Optimal Wind Velocity Estimation," ECOM-5581, December 1975.
18. Avara, Elton P., "Some Effects of Autocorrelated and Cross-Correlated Noise on the Analysis of Variance," ECOM-5582, December 1975.
19. Gillespie, Patti S., R. L. Armstrong, and Kenneth O. White, "The Spectral Characteristics and Atmospheric CO₂ Absorption of the Ho⁺³:YLF Laser at 2.05 μ m," ECOM-5583, December 1975.
20. Novlan, David J., "An Empirical Method of Forecasting Thunderstorms for the White Sands Missile Range," ECOM-5584, February 1976.
21. Avara, Elton P., "Randomization Effects in Hypothesis Testing with Autocorrelated Noise," ECOM-5585, February 1976.
22. Watkins, Wendell R., "Improvements in Long Path Absorption Cell Measurement," ECOM-5586, March 1976.
23. Thomas, Joe, George D. Alexander, and Marvin Dubbin, "SATTEL - An Army Dedicated Meteorological Telemetry System," ECOM-5587, March 1976.
24. Kennedy, Bruce W., and Delbert Bynum, "Army User Test Program for the RDT&E-XM-75 Meteorological Rocket," ECOM-5588, April 1976.
25. Barnett, Kenneth M., "A Description of the Artillery Meteorological Comparisons at White Sands Missile Range, October 1974 - December 1974 ('PASS' - Prototype Artillery [Meteorological] Subsystem)," ECOM-5589, April 1976.
26. Miller, Walter B., "Preliminary Analysis of Fall-of-Shot From Project 'PASS'," ECOM-5590, April 1976.
27. Avara, Elton P., "Error Analysis of Minimum Information and Smith's Direct Methods for Inverting the Radiative Transfer Equation," ECOM-5591, April 1976.
28. Yee, Young P., James D. Horn, and George Alexander, "Synoptic Thermal Wind Calculations from Radiosonde Observations Over the Southwestern United States," ECOM-5592, May 1976.

29. Duncan, Louis D., and Mary Ann Seagraves, "Applications of Empirical Corrections to NOAA-4 VTPR Observations," ECOM-5593, May 1976.
30. Miers, Bruce T., and Steve Weaver, "Applications of Meteorological Satellite Data to Weather Sensitive Army Operations," ECOM-5594, May 1976.
31. Sharenow, Moses, "Redesign and Improvement of Balloon ML-566," ECOM-5595, June 1976.
32. Hansen, Frank V., "The Depth of the Surface Boundary Layer," ECOM-5596, June 1976.
33. Pinnick, R. G., and E. B. Stenmark, "Response Calculations for a Commerical Light-Scattering Aerosol Counter," ECOM-5597, July 1976.
34. Mason, J., and G. B. Hoidale, "Visibility as an Estimator of Infrared Transmittance," ECOM-5598, July 1976.
35. Bruce, Rufus E., Louis D. Duncan, and Joseph H. Pierluissi, "Experimental Study of the Relationship Between Radiosonde Temperatures and Radiometric-Area Temperatures," ECOM-5599, August 1976.
36. Duncan, Louis D., "Stratospheric Wind Shear Computed from Satellite Thermal Sounder Measurements," ECOM-5800, September 1976.
37. Taylor, F., P. Mohan, P. Joseph, and T. Pries, "An All Digital Automated Wind Measurement System," ECOM-5801, September 1976.
38. Bruce, Charles, "Development of Spectrophones for CW and Pulsed Radiation Sources," ECOM-5802, September 1976.
39. Duncan, Louis D., and Mary Ann Seagraves, "Another Method for Estimating Clear Column Radiances," ECOM-5803, October 1976.
40. Blanco, Abel J., and Larry E. Taylor, "Artillery Meteorological Analysis of Project Pass," ECOM-5804, October 1976.
41. Miller, Walter, and Bernard Engebos, "A Mathematical Structure for Refinement of Sound Ranging Estimates," ECOM-5805, November 1976.
42. Gillespie, James B., and James D. Lindberg, "A Method to Obtain Diffuse Reflectance Measurements from 1.0 and 3.0 μ m Using a Cary 171 Spectrophotometer," ECOM-5806, November 1976.
43. Rubio, Roberto, and Robert O. Olsen, "A Study of the Effects of Temperature Variations on Radio Wave Absorption," ECOM-5807, November 1976.

44. Ballard, Harold N., "Temperature Measurements in the Stratosphere from Balloon-Borne Instrument Platforms, 1968-1975," ECOM-5808, December 1976.
45. Monahan, H. H., "An Approach to the Short-Range Prediction of Early Morning Radiation Fog," ECOM-5809, January 1977.
46. Engebos, Bernard Francis, "Introduction to Multiple State Multiple Action Decision Theory and Its Relation to Mixing Structures," ECOM-5810, January 1977.
47. Low, Richard D. H., "Effects of Cloud Particles on Remote Sensing from Space in the 10-Micrometer Infrared Region," ECOM-5811, January 1977.
48. Bonner, Robert S., and R. Newton, "Application of the AN/GVS-5 Laser Rangefinder to Cloud Base Height Measurements," ECOM-5812, February 1977.
49. Rubio, Roberto, "Lidar Detection of Subvisible Reentry Vehicle Erosive Atmospheric Material," ECOM-5813, March 1977.
50. Low, Richard D. H., and J. D. Horn, "Mesoscale Determination of Cloud-Top Height: Problems and Solutions," ECOM-5814, March 1977.
51. Duncan, Louis D., and Mary Ann Seagraves, "Evaluation of the NOAA-4 VTPR Thermal Winds for Nuclear Fallout Predictions," ECOM-5815, March 1977.
52. Randhawa, Jagir S., M. Izquierdo, Carlos McDonald, and Zvi Salpeter, "Stratospheric Ozone Density as Measured by a Chemiluminescent Sensor During the Stratcom VI-A Flight," ECOM-5816, April 1977.
53. Rubio, Roberto, and Mike Izquierdo, "Measurements of Net Atmospheric Irradiance in the 0.7- to 2.8-Micrometer Infrared Region," ECOM-5817, May 1977.
54. Ballard, Harold N., Jose M. Serna, and Frank P. Hudson, Consultant for Chemical Kinetics, "Calculation of Selected Atmospheric Composition Parameters for the Mid-Latitude, September Stratosphere," ECOM-5818, May 1977.
55. Mitchell, J. D., R. S. Sagar, and R. O. Olsen, "Positive Ions in the Middle Atmosphere During Sunrise Conditions," ECOM-5819, May 1977.
56. White, Kenneth O., Wendell R. Watkins, Stuart A. Schleusener, and Ronald L. Johnson, "Solid-State Laser Wavelength Identification Using a Reference Absorber," ECOM-5820, June 1977.
57. Watkins, Wendell R., and Richard G. Dixon, "Automation of Long-Path Absorption Cell Measurements," ECOM-5821, June 1977.

58. Taylor, S. E., J. M. Davis, and J. B. Mason, "Analysis of Observed Soil Skin Moisture Effects on Reflectance," ECOM-5822, June 1977.
59. Duncan, Louis D., and Mary Ann Seagraves, "Fallout Predictions Computed from Satellite Derived Winds," ECOM-5823, June 1977.
60. Snider, D. E., D. G. Murcray, F. H. Murcray, and W. J. Williams, "Investigation of High-Altitude Enhanced Infrared Background Emissions," (U), SECRET, ECOM-5824, June 1977.
61. Dubbin, Marvin H., and Dennis Hall, "Synchronous Meteorological Satellite Direct Readout Ground System Digital Video Electronics," ECOM-5825, June 1977.
62. Miller, W., and B. Engebos, "A Preliminary Analysis of Two Sound Ranging Algorithms," ECOM-5826, July 1977.
63. Kennedy, Bruce W., and James K. Luers, "Ballistic Sphere Techniques for Measuring Atmospheric Parameters," ECOM-5827, July 1977.
64. Duncan, Louis D., "Zenith Angle Variation of Satellite Thermal Sounder Measurements," ECOM-5828, August 1977.
65. Hansen, Frank V., "The Critical Richardson Number," ECOM-5829, September 1977.
66. Ballard, Harold N., and Frank P. Hudson (Compilers), "Stratospheric Composition Balloon-Borne Experiment," ECOM-5830, October 1977.
67. Barr, William C., and Arnold C. Peterson, "Wind Measuring Accuracy Test of Meteorological Systems," ECOM-5831, November 1977.
68. Ethridge, G. A., and F. V. Hansen, "Atmospheric Diffusion: Similarity Theory and Empirical Derivations for Use in Boundary Layer Diffusion Problems," ECOM-5832, November 1977.
69. Low, Richard D. H., "The Internal Cloud Radiation Field and a Technique for Determining Cloud Blackness," ECOM-5833, December 1977.
70. Watkins, Wendell R., Kenneth O. White, Charles W. Bruce, Donald L. Walters, and James D. Lindberg, "Measurements Required for Prediction of High Energy Laser Transmission," ECOM-5834, December 1977.
71. Rubio, Robert, "Investigation of Abrupt Decreases in Atmospherically Backscattered Laser Energy," ECOM-5835, December 1977.
72. Monahan, H. H., and R. M. Cionco, "An Interpretative Review of Existing Capabilities for Measuring and Forecasting Selected Weather Variables (Emphasizing Remote Means)," ASL-TR-0001, January 1978.

73. Heaps, Melvin G., "The 1979 Solar Eclipse and Validation of D-Region Models," ASL-TR-0002, March 1978.
74. Jennings, S. G., and J. B. Gillespie, "M.I.E. Theory Sensitivity Studies - The Effects of Aerosol Complex Refractive Index and Size Distribution Variations on Extinction and Absorption Coefficients, Part II: Analysis of the Computational Results," ASL-TR-0003, March 1978.
75. White, Kenneth O., et al, "Water Vapor Continuum Absorption in the 3.5 μ m to 4.0 μ m Region," ASL-TR-0004, March 1978.
76. Olsen, Robert O., and Bruce W. Kennedy, "ABRES Pretest Atmospheric Measurements," ASL-TR-0005, April 1978.
77. Ballard, Harold N., Jose M. Serna, and Frank P. Hudson, "Calculation of Atmospheric Composition in the High Latitude September Stratosphere," ASL-TR-0006, May 1978.
78. Watkins, Wendell R., et al, "Water Vapor Absorption Coefficients at HF Laser Wavelengths," ASL-TR-0007, May 1978.
79. Hansen, Frank V., "The Growth and Prediction of Nocturnal Inversions," ASL-TR-0008, May 1978.
80. Samuel, Christine, Charles Bruce, and Ralph Brewer, "Spectrophone Analysis of Gas Samples Obtained at Field Site," ASL-TR-0009, June 1978.
81. Pinnick, R. G., et al., "Vertical Structure in Atmospheric Fog and Haze and its Effects on IR Extinction," ASL-TR-0010, July 1978.
82. Low, Richard D. H., Louis D. Duncan, and Richard B. Gomez, "The Microphysical Basis of Fog Optical Characterization," ASL-TR-0011, August 1978.
83. Heaps, Melvin G., "The Effect of a Solar Proton Event on the Minor Neutral Constituents of the Summer Polar Mesosphere," ASL-TR-0012, August 1978.
84. Mason, James B., "Light Attenuation in Falling Snow," ASL-TR-0013, August 1978.
85. Blanco, Abel J., "Long-Range Artillery Sound Ranging: 'PASS' Meteorological Application," ASL-TR-0014, September 1978.
86. Heaps, M. G., and F. E. Niles, "Modeling of Ion Chemistry of the D-Region: A Case Study Based Upon the 1966 Total Solar Eclipse," ASL-TR-0015, September 1978.

87. Jennings, S. G., and R. G. Pinnick, "Effects of Particulate Complex Refractive Index and Particle Size Distribution Variations on Atmospheric Extinction and Absorption for Visible Through Middle-Infrared Wavelengths," ASL-TR-0016, September 1978.
88. Watkins, Wendell R., Kenneth O. White, Lanny R. Bower, and Brian Z. Sojka, "Pressure Dependence of the Water Vapor Continuum Absorption in the 3.5- to 4.0-Micrometer Region," ASL-TR-0017, September 1978.
89. Miller, W. B., and B. F. Engebos, "Behavior of Four Sound Ranging Techniques in an Idealized Physical Environment," ASL-TR-0018, September 1978.
90. Gomez, Richard G., "Effectiveness Studies of the CBU-88/B Bomb, Cluster, Smoke Weapon," (U), CONFIDENTIAL ASL-TR-0019, September 1978.
91. Miller, August, Richard C. Shirkey, and Mary Ann Seagraves, "Calculation of Thermal Emission from Aerosols Using the Doubling Technique," ASL-TR-0020, November 1978.
92. Lindberg, James D., et al, "Measured Effects of Battlefield Dust and Smoke on Visible, Infrared, and Millimeter Wavelengths Propagation: A Preliminary Report on Dusty Infrared Test-I (DIRT-I)," ASL-TR-0021, January 1979.
93. Kennedy, Bruce W., Arthur Kinghorn, and B. R. Hixon, "Engineering Flight Tests of Range Meteorological Sounding System Radiosonde," ASL-TR-0022, February 1979.
94. Rubio, Roberto, and Don Hoock, "Microwave Effective Earth Radius Factor Variability at Wiesbaden and Balboa," ASL-TR-0023, February 1979.
95. Low, Richard D. H., "A Theoretical Investigation of Cloud/Fog Optical Properties and Their Spectral Correlations," ASL-TR-0024, February 1979.
96. Pinnick, R. G., and H. J. Auvermann, "Response Characteristics of Knollenberg Light-Scattering Aerosol Counters," ASL-TR-0025, February 1979.
97. Heaps, Melvin G., Robert O. Olsen, and Warren W. Berning, "Solar Eclipse 1979, Atmospheric Sciences Laboratory Program Overview," ASL-TR-0026, February 1979.
98. Blanco, Abel J., "Long-Range Artillery Sound Ranging: 'PASS' GR-8 Sound Ranging Data," ASL-TR-0027, March 1979.
99. Kennedy, Bruce W., and Jose M. Serna, "Meteorological Rocket Network System Reliability," ASL-TR-0028, March 1979.

100. Swingle, Donald M., "Effects of Arrival Time Errors in Weighted Range Equation Solutions for Linear Base Sound Ranging," ASL-TR-0029, April 1979.
101. Umstead, Robert K., Ricardo Pena, and Frank V. Hansen, "KWIK: An Algorithm for Calculating Munition Expenditures for Smoke Screening/Obscuration in Tactical Situations," ASL-TR-0030, April 1979.
102. D'Arcy, Edward M., "Accuracy Validation of the Modified Nike Hercules Radar," ASL-TR-0031, May 1979.
103. Rodriguez, Ruben, "Evaluation of the Passive Remote Crosswind Sensor," ASL-TR-0032, May 1979.
104. Barber, T. L., and R. Rodriguez, "Transit Time Lidar Measurement of Near-Surface Winds in the Atmosphere," ASL-TR-0033, May 1979.
105. Low, Richard D. H., Louis D. Duncan, and Y. Y. Roger R. Hsiao, "Micro-physical and Optical Properties of California Coastal Fogs at Fort Ord," ASL-TR-0034, June 1979.
106. Rodriguez, Ruben, and William J. Vechione, "Evaluation of the Saturation Resistant Crosswind Sensor," ASL-TR-0035, July 1979.
107. Ohmstede, William D., "The Dynamics of Material Layers," ASL-TR-0036, July 1979.
108. Pinnick, R. G., S. G. Jennings, Petr Chylek, and H. J. Auvermann, "Relationships between IR Extinction Absorption, and Liquid Water Content of Fogs," ASL-TR-0037, August 1979.
109. Rodriguez, Ruben, and William J. Vechione, "Performance Evaluation of the Optical Crosswind Profiler," ASL-TR-0038, August 1979.
110. Miers, Bruce T., "Precipitation Estimation Using Satellite Data," ASL-TR-0039, September 1979.
111. Dickson, David H., and Charles M. Sonnenschein, "Helicopter Remote Wind Sensor System Description," ASL-TR-0040, September 1979.
112. Heaps, Melvin G., and Joseph M. Heimerl, "Validation of the Dairchem Code, I: Quiet Midlatitude Conditions," ASL-TR-0041, September 1979.
113. Bonner, Robert S., and William J. Lentz, "The Visioceilometer: A Portable Cloud Height and Visibility Indicator," ASL-TR-0042, October 1979.
114. Cohn, Stephen L., "The Role of Atmospheric Sulfates in Battlefield Obscurations," ASL-TR-0043, October 1979.

115. Fawbush, E. J., et al, "Characterization of Atmospheric Conditions at the High Energy Laser System Test Facility (HELSTF), White Sands Missile Range, New Mexico, Part I, 24 March to 8 April 1977," ASL-TR-0044, November 1979.
116. Barber, Ted L., "Short-Time Mass Variation in Natural Atmospheric Dust," ASL-TR-0045, November 1979.
117. Low, Richard D. H., "Fog Evolution in the Visible and Infrared Spectral Regions and its Meaning in Optical Modeling," ASL-TR-0046, December 1979.
118. Duncan, Louis D., et al, "The Electro-Optical Systems Atmospheric Effects Library, Volume I: Technical Documentation," ASL-TR-0047, December 1979.
119. Shirkey, R. C., et al, "Interim E-O SAEL, Volume II, Users Manual," ASL-TR-0048, December 1979.
120. Kobayashi, H. K., "Atmospheric Effects on Millimeter Radio Waves," ASL-TR-0049, January 1980.
121. Seagraves, Mary Ann, and Louis D. Duncan, "An Analysis of Transmittances Measured Through Battlefield Dust Clouds," ASL-TR-0050, February 1980.
122. Dickson, David H., and Jon E. Ottesen, "Helicopter Remote Wind Sensor Flight Test," ASL-TR-0051, February 1980.
123. Pinnick, R. G., and S. G. Jennings, "Relationships Between Radiative Properties and Mass Content of Phosphoric Acid, HC, Petroleum Oil, and Sulfuric Acid Military Smokes," ASL-TR-0052, April 1980.
124. Hinds, B. D., and J. B. Gillespie, "Optical Characterization of Atmospheric Particulates on San Nicolas Island, California," ASL-TR-0053, April 1980.
125. Miers, Bruce T., "Precipitation Estimation for Military Hydrology," ASL-TR-0054, April 1980.
126. Stenmark, Ernest B., "Objective Quality Control of Artillery Computer Meteorological Messages," ASL-TR-0055, April 1980.
127. Duncan, Louis D., and Richard D. H. Low, "Bimodal Size Distribution Models for Fogs at Meppen, Germany," ASL-TR-0056, April 1980.
128. Olsen, Robert O., and Jagir S. Randhawa, "The Influence of Atmospheric Dynamics on Ozone and Temperature Structure," ASL-TR-0057, May 1980.

129. Kennedy, Bruce W., et al, "Dusty Infrared Test-II (DIRT-II) Program," ASL-TR-0058, May 1980.
130. Heaps, Melvin G., Robert O. Olsen, Warren Berning, John Cross, and Arthur Gilcrease, "1979 Solar Eclipse, Part I - Atmospheric Sciences Laboratory Field Program Summary," ASL-TR-0059, May 1980
131. Miller, Walter B., "User's Guide for Passive Target Acquisition Program Two (PTAP-2)," ASL-TR-0060, June 1980.
132. Holt, E. H., editor, "Atmospheric Data Requirements for Battlefield Obscuration Applications," ASL-TR-0061, June 1980.
133. Shirkey, Richard C., August Miller, George H. Goedecke, and Yugal Behl, "Single Scattering Code AGAUSX: Theory, Applications, Comparisons, and Listing," ASL-TR-0062, July 1980.
134. Sojka, Brian Z., and Kenneth O. White, "Evaluation of Specialized Photoacoustic Absorption Chambers for Near-Millimeter Wave (NMMW) Propagation Measurements," ASL-TR-0063, August 1980.
135. Bruce, Charles W., Young Paul Yee, and S. G. Jennings, "In Situ Measurement of the Ratio of Aerosol Absorption to Extinction Coefficient," ASL-TR-0064, August 1980.
136. Yee, Young Paul, Charles W. Bruce, and Ralph J. Brewer, "Gaseous/Particulate Absorption Studies at WSMR using Laser Sourced Spectrophones," ASL-TR-0065, June 1980.
137. Lindberg, James D., Radon B. Loveland, Melvin Heaps, James B. Gillespie, and Andrew F. Lewis, "Battlefield Dust and Atmospheric Characterization Measurements During West German Summertime Conditions in Support of Grafenwohr Tests," ASL-TR-0066, September 1980.
138. Vechione, W. J., "Evaluation of the Environmental Instruments, Incorporated Series 200 Dual Component Wind Set," ASL-TR-0067, September 1980.
139. Bruce, C. W., Y. P. Yee, B. D. Hinds, R. G. Pinnick, R. J. Brewer, and J. Minjares, "Initial Field Measurements of Atmospheric Absorption at 9 μ m to 11 μ m Wavelengths," ASL-TR-0068, October 1980.
140. Heaps, M. G., R. O. Olsen, K. D. Baker, D. A. Burt, L. C. Howlett, L. L. Jensen, E. F. Pound, and G. D. Allred, "1979 Solar Eclipse: Part II Initial Results for Ionization Sources, Electron Density, and Minor Neutral Constituents," ASL-TR-0069, October 1980.
141. Low, Richard D. H., "One-Dimensional Cloud Microphysical Models for Central Europe and their Optical Properties," ASL-TR-0070, October 1980.

142. Duncan, Louis D., James D. Lindberg, and Radon B. Loveland, "An Empirical Model of the Vertical Structure of German Fogs," ASL-TR-0071, November 1980.
143. Duncan, Louis D., 1981, "EOSAEL 80, Volume I, Technical Documentation," ASL-TR-0072, January 1981.
144. Shirkey, R. C., and S. G. O'Brien, "EOSAEL 80, Volume II, Users Manual," ASL-TR-0073, January 1981.
145. Bruce, C. W., "Characterization of Aerosol Nonlinear Effects on a High-Power CO₂ Laser Beam," ASL-TR-0074, February 1981.
146. Duncan, Louis D., and James D. Lindberg, "Air Mass Considerations in Fog Optical Modeling," ASL-TR-0075, February 1981.
147. Kunkel, Kenneth E., "Evaluation of a Tethered Kite Anemometer," ASL-TR-0076, February 1981.
148. Kunkel, K. E., et al, "Characterization of Atmospheric Conditions at the High Energy Laser System Test Facility (HELSTF) White Sands Missile Range, New Mexico, August 1977 to October 1978, Part II, Optical Turbulence, Wind, Water Vapor Pressure, Temperature," ASL-TR-0077, February 1981.
149. Miers, Bruce T., "Weather Scenarios for Central Germany," ASL-TR-0078, February 1981.
150. Cogan, James L., "Sensitivity Analysis of a Mesoscale Moisture Model," ASL-TR-0079, March 1981.
151. Brewer, R. J., C. W. Bruce, and J. L. Mater, "Optoacoustic Spectroscopy of C₂H₂ at the 9 μ m and 10 μ m C¹²O₂¹⁶ Laser Wavelengths," ASL-TR-0080, March 1981.
152. Swingle, Donald M., "Reducible Errors in the Artillery Sound Ranging Solution, Part I: The Curvature Correction" (U), SECRET, ASL-TR-0081, April 1981.
153. Miller, Walter B., "The Existence and Implications of a Fundamental System of Linear Equations in Sound Ranging" (U), SECRET, ASL-TR-0082, April 1981.
154. Bruce, Dorothy, Charles W. Bruce, and Young Paul Yee, "Experimentally Determined Relationship Between Extinction and Liquid Water Content," ASL-TR-0083, April 1981.
155. Seagraves, Mary Ann, "Visible and Infrared Obscuration Effects of Ice Fog," ASL-TR-0084, May 1981.

156. Watkins, Wendell R., and Kenneth O. White, "Wedge Absorption Remote Sensor," ASL-TR-0085, May 1981.
157. Watkins, Wendell R., Kenneth O. White, and Laura J. Crow, "Turbulence Effects on Open Air Multipaths," ASL-TR-0086, May 1981.
158. Blanco, Abel J., "Extending Application of the Artillery Computer Meteorological Message," ASL-TR-0087, May 1981.
159. Heaps, M. G., D. W. Hoock, R. O. Olsen, B. F. Engebos, and R. Rubio, "High Frequency Position Location: An Assessment of Limitations and Potential Improvements," ASL-TR-0088, May 1981.
160. Watkins, Wendell R., and Kenneth O. White, "Laboratory Facility for Measurement of Hot Gaseous Plume Radiative Transfer," ASL-TR-0089, June 1981.
161. Heaps, M. G., "Dust Cloud Models: Sensitivity of Calculated Transmittances to Variations in Input Parameters," ASL-TR-0090, June 1981.
162. Seagraves, Mary Ann, "Some Optical Properties of Blowing Snow," ASL-TR-0091, June 1981.
163. Kobayashi, Herbert K., "Effect of Hail, Snow, and Melting Hydrometeors on Millimeter Radio Waves," ASL-TR-0092, July 1981.
164. Cogan, James L., "Techniques for the Computation of Wind, Ceiling, and Extinction Coefficient Using Currently Acquired RPV Data," ASL-TR-0093, July 1981.

DATE
FILMED
— 8