

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

LEVEL 4, 13

FAA-EE-81-8



Simplex "A" -A Simplified Atmospheric Dispersion Model for Airport Use-(Users Guide)

Office of Environment and Energy
Washington, D.C. 20591

AD A107320

DTIC ELECTE
NOV 18 1981
S A D

FILE COPY

July 1981

H. M. Segal

This document has been approved for public release and sale; its distribution is unlimited.

KR

81 11 16 078

NOTICE

The United States Government does not endorse products or manufacturers. Trade or manufacturer's names appear herein solely because they are considered essential to the object of this report.

14

FAA/EE-81

1. Report No. FAA-EE-81-8		2. Government Accession No. AD-A107320		3. Report's Catalog No. 11	
4. Title and Subtitle SIMPLEX "A" - A SIMPLIFIED ATMOSPHERIC DISPERSION MODEL FOR AIRPORT USE (USERS GUIDE)				5. Report Date JUL 81	
6. Author HOWARD SEGAL M.				6. Performing Organization Code AEE-300	
7. Performing Organization Name and Address U.S. DEPARTMENT OF TRANSPORTATION FEDERAL AVIATION ADMINISTRATION OFFICE OF ENVIRONMENT AND ENERGY, AIR QUALITY DIV. WASHINGTON, D.C. 20591				8. Performing Organization Report No. FAA-EE-81-8	
12. Sponsoring Agency Name and Address 12) 25				10. Work Unit No. (TRAIIS) 11. Contract or Grant No. N/A	
15. Supplementary Notes				13. Type of Report and Period Covered USERS MANUAL	
16. Abstract The method, limitations and uses of the SIMPLEX "A" atmospheric dispersion model are described. The model determines pollutant concentrations from taking-off aircraft and has the flexibility to easily accept parameter changes. It can treat either single or multiple aircraft departures and permits air quality calculations to be made by persons without an extensive computer background. The program is listed and the results of two sample problems are given to illustrate the use of the model. This is a research model with many of its dispersion and turbulence parameters still under investigation. As such it has not been adopted by the FAA for formalized pollution assessments.				14. Sponsoring Agency Code FAA	
17. Key Words AIR QUALITY AIRCRAFT EMISSIONS AIRPORT POLLUTION AIR QUALITY MODELING			18. Distribution Statement This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161		
19. Security Classif. (of this report) UNCLASSIFIED		20. Security Classif. (of this page) UNCLASSIFIED		21. No. of Pages 21	22. Price

4110.1

TABLE OF CONTENTS

	<u>Page</u>
Introduction	1
Model Description	1
Special Program Features	2
Standard Deviations of Plume Concentration (σ)	2
Plume Height	3
Stability Class	3
Winds	3
Acceleration	3
Emission Tail	3
Vertical Dispersion Lid	4
Iteration Interval	4
Dosage Output	4
Sample Problem	4
Preparation of Data for Program Execution	4
Program Operation	5
Conclusions	6
List of Figures	
Figure 1. Source-Receptor Geometry During Takeoff	7
Figure 2. Program Printout	8
Figure 3. Registers and Labels	10
Figure 4. Inputs and Outputs	11
Figure 5. Emission Tail Geometry	12
Figure 6. Sample Problem Inputs - Case 1	13
Figure 7. Sample Problem Inputs - Case 2	14
Figure 8. Results - Case 1	15
Figure 9. Results - Case 2	18
References	21

INTRODUCTION

Atmospheric dispersion models are mathematical expressions that combine source emissions with meteorological parameters to produce air quality estimates at specified receptor locations. At airports where many sources and receptors are involved, refined models such as the Airport Vicinity Air Pollution model (AVAP)(1) are used to determine air quality. However, where few sources and receptors are involved, screening models are very attractive for identifying the need for further analysis with the more refined models. This report describes one of these screening models, SIMPLEX "A".

This report describes the mathematical basis for the model, lists the program, and explains the steps taken to compute pollution dosage. Special program features are described and two sample problems are solved.

The experienced user, who is primarily concerned with running a specific problem, may bypass the descriptive sections of this report and proceed directly to the "Sample Problem-Program Operation" section on page 5.

MODEL DESCRIPTION

SIMPLEX "A", which has been programmed for the Hewlett Packard 67 and 97 desk calculators, addresses emissions during takeoff. Additional SIMPLEX models are being developed to determine the air quality impact from taxiing and queueing aircraft as well as from ground vehicles at the airport. The model is particularly useful at small airports and at those airports having only a few dominant sources.

SIMPLEX "A" uses the same Gaussian formulation employed in many of the refined models listed in the Environmental Protection Agency's (EPA) guidelines on air quality models. It accomplishes its function by simplifying many of the detailed features of the more refined models. The model is an integrated puff model for an accelerating point source. Downwind receptors are assumed to be at ground level ($z=0$) and receive pollution doses from each emission puff. Figure 1 describes the source-receptor geometry where the dose from each emission puff is summed at a receptor to give a total dose due to a complete takeoff event. Concentrations are measured in parts per million (ppm) of Nitrogen Dioxide (NO_2) where the complete conversion of Nitrogen Oxides (NO_x) to NO_2 is assumed. In cases where Carbon Monoxide (CO) concentrations are required, NO_2 calculations can be factored appropriately. The total dose at point $x, y, 0$ is given by the equation:

$$1 \quad \psi = \frac{G}{\pi \sigma_z \sigma_y \sigma_x U} \exp \left[-\frac{1}{2} \left(\frac{x}{\sigma_x} \right)^2 \right] \exp \left[-\frac{1}{2} \left(\frac{y}{\sigma_y} \right)^2 \right] \quad (2)$$

SYMBOL	DEFINITION	UNITS
ψ	receptor exposure of dose	ppm-sec. (NO_2)
x	downwind distance in the direction of the mean wind	meters (m)
y	crosswind distance	m

z	height above ground level	m
σ_z	standard deviation of plume concentration in the vertical direction	m
σ_y	standard deviation of plume concentration in the crosswind direction	m
u	wind speed	m/sec
Q_T	total emissions during an emission release	grams
H	effective height of emissions	m

The program is printed out in Figure 2. The registers, labels, inputs and outputs are listed in Figures 3 and 4.

SPECIAL PROGRAM FEATURES

Standard Deviations of Plume Concentration (sigma (σ))

A subprogram was employed to determine the standard deviation of plume concentration in the horizontal (crosswind) and vertical directions. This subprogram was based upon the assumption that pollution disperses according to the power law expression:

$$2 \quad \sigma = Kx^b \quad \text{or, in straight line form}$$

$$3 \quad \log \sigma = b \log x + \log K$$

The exponent "b" governs the rate of pollutant dispersion and the coefficient "K" depends upon atmospheric stability.

Analysis of the Pasquill/Gifford curves* (3) used in most dispersion models shows that for stability classes "B" through "E", single straight lines are approximated when σ_y and σ_z values are plotted logarithmically against downwind distance up to a source-receptor distance of 1000 meters. It is also seen that these straight lines have the same slope.

With the realization that σ as a function of four stability classes can be represented as single straight lines with the same slope (0.9), equation 2 can be rewritten as:

$$4 \quad \sigma_y = K_1 x^{0.9}$$

$$5 \quad \sigma_z = K_2 x^{0.9} \quad \text{when } x \text{ does not exceed 1000 meters}$$

The values of K_1 and K_2 which are listed in the program printout (Figure 2) were obtained by solving equations 4 and 5 for K_1 and K_2 after substituting values for x , σ_y and σ_z .

The program not only allows for calculation of the σ_y and σ_z values in equations 4 and 5 but also has provisions to input values for initial sigmas (σ_{o_y} and σ_{o_z}) in order to account for the enhanced dispersion caused by the hot, high velocity jet exhaust. (This enhanced dispersion is discussed in (4), (5) and (6)). The final dispersion parameter (σ_T) is automatically calculated in the program by summing and squaring initial and calculated σ 's and then extracting the square root.

* The values from the Pasquill/Gifford curves were used per se and were not adjusted for averaging times different from those stated in (3).

Because of technical difficulties, it has not been possible to determine T_0 values from measurements taken at airports during high thrust airplane takeoff. However, plume measurements have been made during low thrust operations at Dulles (4) and Los Angeles International (7) airports. Average values from measurements taken at these two airports (8 meters for T_{O_2} and 16 meters for T_{O_V}) are incorporated in the model.

Plume Height

Because of the lack of experimental data to support plume rise theories for taking-off aircraft, special plume rise algorithms have not been incorporated into the model. While research is planned in this area, until this research is completed, it was assumed that the plume height was at least as high as the airplane engines. An average value for this parameter is four meters for airplanes operating at a typical large airport.

Stability Class

Pasquill/Gifford stability classes "B", "C", "D", and "E" are expected to prevail at the airport during the times of air quality assessment. Turner (3) gives a detailed description of the characteristics of each stability class. A particular stability class is identified by a range of wind speed, solar radiation intensity, and cloud cover. Values for these parameters can be obtained from local National Weather Service or observer personnel.

Winds

The coordinate system is oriented to the runway on which the aircraft are assumed to be operating. Since aircraft usually take off into the wind, wind angles are measured only from 0 to 90 degrees on either side of the runway. For example, a zero degree wind would blow directly down the runway; a 90 degree wind would blow perpendicular to the runway.

Acceleration

Aircraft performance manuals can be used to determine acceleration during takeoff. However, the program has been structured to accept an average takeoff acceleration and performance information should be adjusted to average acceleration values.

Emission Tail

During the operation of a jet engine, the high velocity of its exhaust gases creates an emission tail which can extend for a considerable distance behind the aircraft (Figure 5). This tail is simulated by assuming a value for its length and by assuming a finite number of points along the tail at which emissions are considered to be released. Observations of the tail length of a number of aircraft enabled the estimation of a nominal value for this tail length and parametric calculation of concentrations at receptors enabled the selection of a minimum number of emission release points that would provide reasonable model accuracy for those wind angles that permit a sweep of pollution over a receptor during the takeoff run.

The program assumes a 225 meter emission tail with three emission release points located 75 meters apart in the tail (see Figure 5). The model is programmed to index the emission starting point 75 meters further down the tail after each iteration sequence is completed. The first and last points in the tail are 37.5 meters from the ends of the tail. (The tail starts at the exit plane of the engine.)

Vertical Dispersion Lid

Calculations under a variety of assessment conditions showed that a lid on vertical dispersion, i.e. an inversion "cap", had an insignificant effect on concentration at the short downwind distances (less than 1000 meters) employed in assessing aircraft pollutant impact. An algorithm to account for this phenomenon is, therefore, not included in the program.

Iteration Interval

From past program use, a one-second iteration time is recommended. Using this iteration time interval, the dose calculation can be completed in less than 15 minutes at a source receptor distance of 300 meters.

Dosage Output

Total dosage is printed out at the end of each iteration sequence. The program is stopped when the dosage reaches a maximum value. Output units are parts per million-seconds (ppm-seconds). To determine the average concentration over a one-hour time period (for compatibility with a particular short term standard) the dosage must be divided by 3600 seconds.

SAMPLE PROBLEM

The step by step procedure for solving the sample problems is described in this section. While this procedure is structured for a single aircraft, the same procedure can be used for any number of aircraft by treating them as one large aircraft.

Preparation of Data For Program Execution

From Figure 1 it is seen that the Case 1 receptor is located 337.5 meters downwind from the aircraft (as measured along the runway) and 200 meters abeam of the runway centerline. The Case 2 receptor is located 262.5 meters upwind of the aircraft and 100 meters abeam to it.

The objective of this problem is to determine the air quality impact of 747 NO_x emissions (reported as NO_2) during takeoff. During this takeoff, it was assumed that a 5-meter per second wind was blowing at 30 degrees to the runway centerline and that Pasquill/Gifford stability class "E" prevailed. The 747 was assumed to have a constant takeoff acceleration of 1.3 meters per second per second. All inputs are listed in Figures 6 and 7.

The following procedure was used in solving the problems: Source emissions were obtained from AP-42 supplement 10 (8), where 747 NO_x emissions are listed at 215.3 kilograms per hour per engine or 60 grams per second per engine. Since the 747 has four engines, the total emission rate was 240 grams per second. To accommodate the three emission release points in the "tail" (see Figure 5) this rate was divided by 3 to reduce its value to 80 grams per second per "tail" release point. Selecting an iteration time of one second and multiplying it by the emission rate results in the release of 80 grams of NO_x per puff.

σ_z and σ_y values of 8 and 16 meters respectively were selected from the Standard Deviation of Plume Concentration section of this report and a plume height of 4 meters was selected from the plume height section. The beginning time was set at zero by inputting the iteration time (one second) and assigning a negative sign to it. The Case 1 receptor is downwind of the aircraft giving it a positive sign (see Figure 1). The Case 2 receptor is upwind of the aircraft giving it a negative sign. The airplane to receptor distance is converted to a "tail" to receptor distance (at the first "tail" emission point, see Figure 5) by subtracting 37.5 meters from the former to uniformly space the three tail release points over the 225 meter tail length. The resulting distance between the receptors and the first point in the emission tail is +300 meters for Case 1 and -300 meters for Case 2.

Program Operation

Load the Program

Before loading the program the "on-off" switch should be in the "on" position and the "run-program" switch should be in the "run" position (for the HP-97 the "trace-manual-norm" switch should be in the "manual" position). The program can then be loaded into the calculator by first pushing the number 1 end of the magnetic tape strip* into the slot in the upper left hand portion of the HP-97 calculator. (On the HP-67 calculator the slot is located on the right hand side.) When the strip comes out the other side, turn it around to the number 2 end and push it through the slot a second time. The program is now loaded into the calculator and the tape strip which has come out the back of the calculator can be stored in the horizontal slot just under the calculator switches.

Input Data

Inputs for the Case 1 and Case 2 problems are listed in Figures 6 and 7 and a printout of the results is listed in Figures 8 and 9. The Case 1 problem is solved by first entering the values for the six input parameters listed in Figure 6 into the Primary Register by depressing the following keys: 80 STO 0 8 STO 2 4 STO B 30 STO D 1 STO E 5 STO I. Any input errors can be erased by depressing the CLx key or by turning off the calculator, restarting it and reloading the program.

* This tape strip can be obtained by contacting the Federal Aviation Administration; Office of Environment and Energy; 800 Independence Avenue S.W.; Washington, D.C. 20591

After the primary register has been loaded the secondary register is loaded by depressing the following keys: "f" "P-S"* 300 STO 0 200 STO 4 16 STO 6 1 CHS** ATO 7 1.3 STO 8 "f" "P-S*.

Program Execution

The program is started by depressing the "E" key for the assumed "E" stability (The "B", "C", and "D" keys will start the program for "B", "C", and "D" stability classes respectively). The resulting three numbers printed out on the HP-97 or displayed on the HP-67 after each iteration is completed are; (1) time (in seconds) from the program start; (2) distance (in meters) that the point in the emission tail has moved down the runway; and (3) total dose (in ppm-seconds) that the receptor has received.

It is noted that after 20 iterations, the dose value will reach a maximum of 82.16 ppm-sec. This value represents the dose received at the receptor from the first emission release point in the "tail". When the dose converges on this maximum value (when all concentration digits remained unchanged out to the second decimal point) the R/S key is depressed to stop the program. The "A" key is then depressed to clear registers and index the starting point to the second tail position. The "E" key is then depressed a second time to start the next computation. Again when the dose value levels off at 55.59 ppm-sec., the "R/S" key is depressed to stop the program. Depressing the "A" key and then, after the display stops flashing, the "E" key, permits the last computation to be completed which results in a dosage of 40.85 ppm-sec. for the last tail point. After reaching this last convergence value, the program is terminated by depressing the R/S key. The person making the calculation can then sum the three dose values and divide them by 3600 to produce a one-hour concentration of 0.05 ppm.

CONCLUSIONS


The method, limitations and use of the SIMPLEX"A" model have been described. The program can determine concentrations from departing aircraft and has the flexibility to easily accept parameter changes. It can treat either single or multiple events and permits air quality calculations to be made by persons without an extensive computer background. The model can assist in determining the impact of aircraft emissions on air quality in conjunction with requirements for controlling engine emissions and can be used as a screening tool in evaluating the air quality impact of proposed Federal actions at airports.

* The P-S command is input by depressing the "CLx" key on the HP-97 and the "CHI" key on the HP-67 calculator.


** Negative numbers are entered into the Hewlett Packard calculators by depressing the appropriate number key followed by the "CHS" key.

Figure 1

SOURCE-RECEPTOR GEOMETRY DURING TAKEOFF

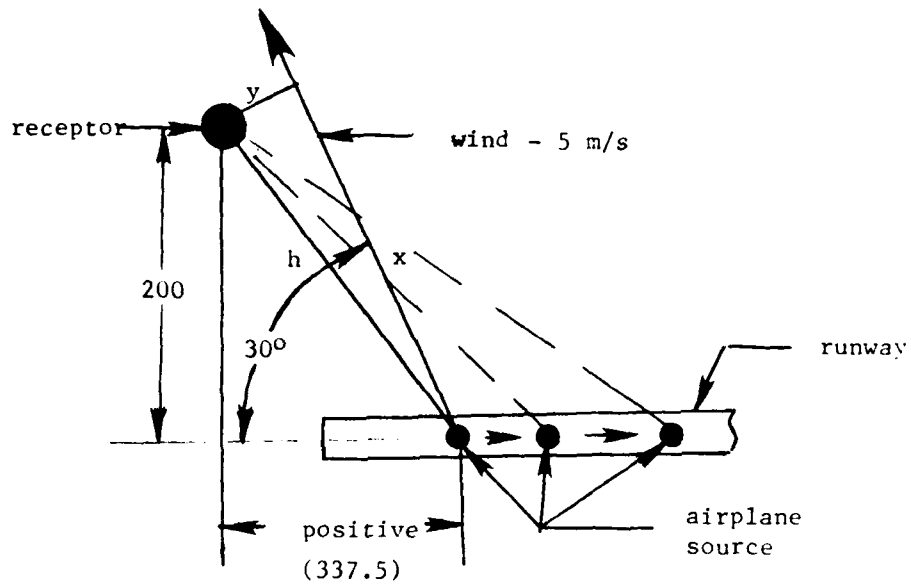


Case 1

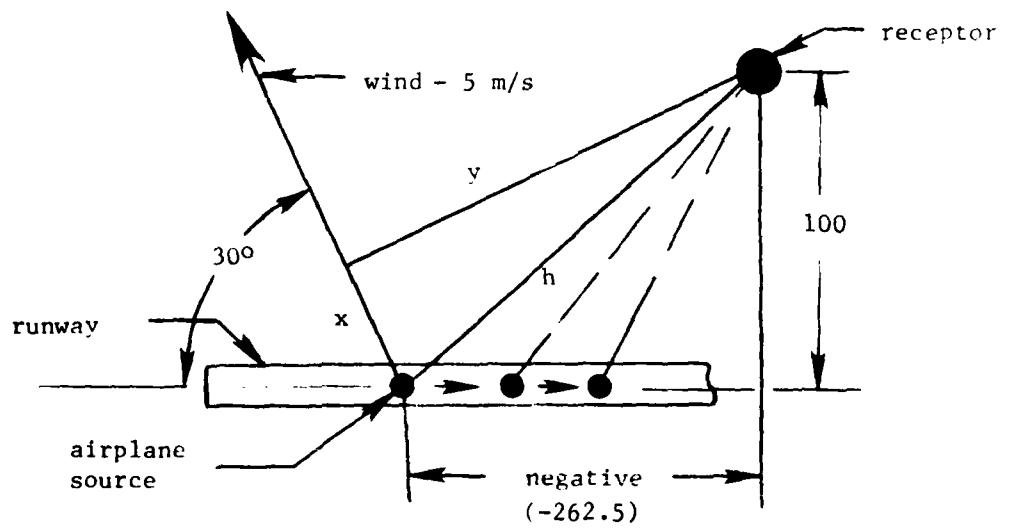

Case 2

Figure 2

PROGRAM PRINTOUT

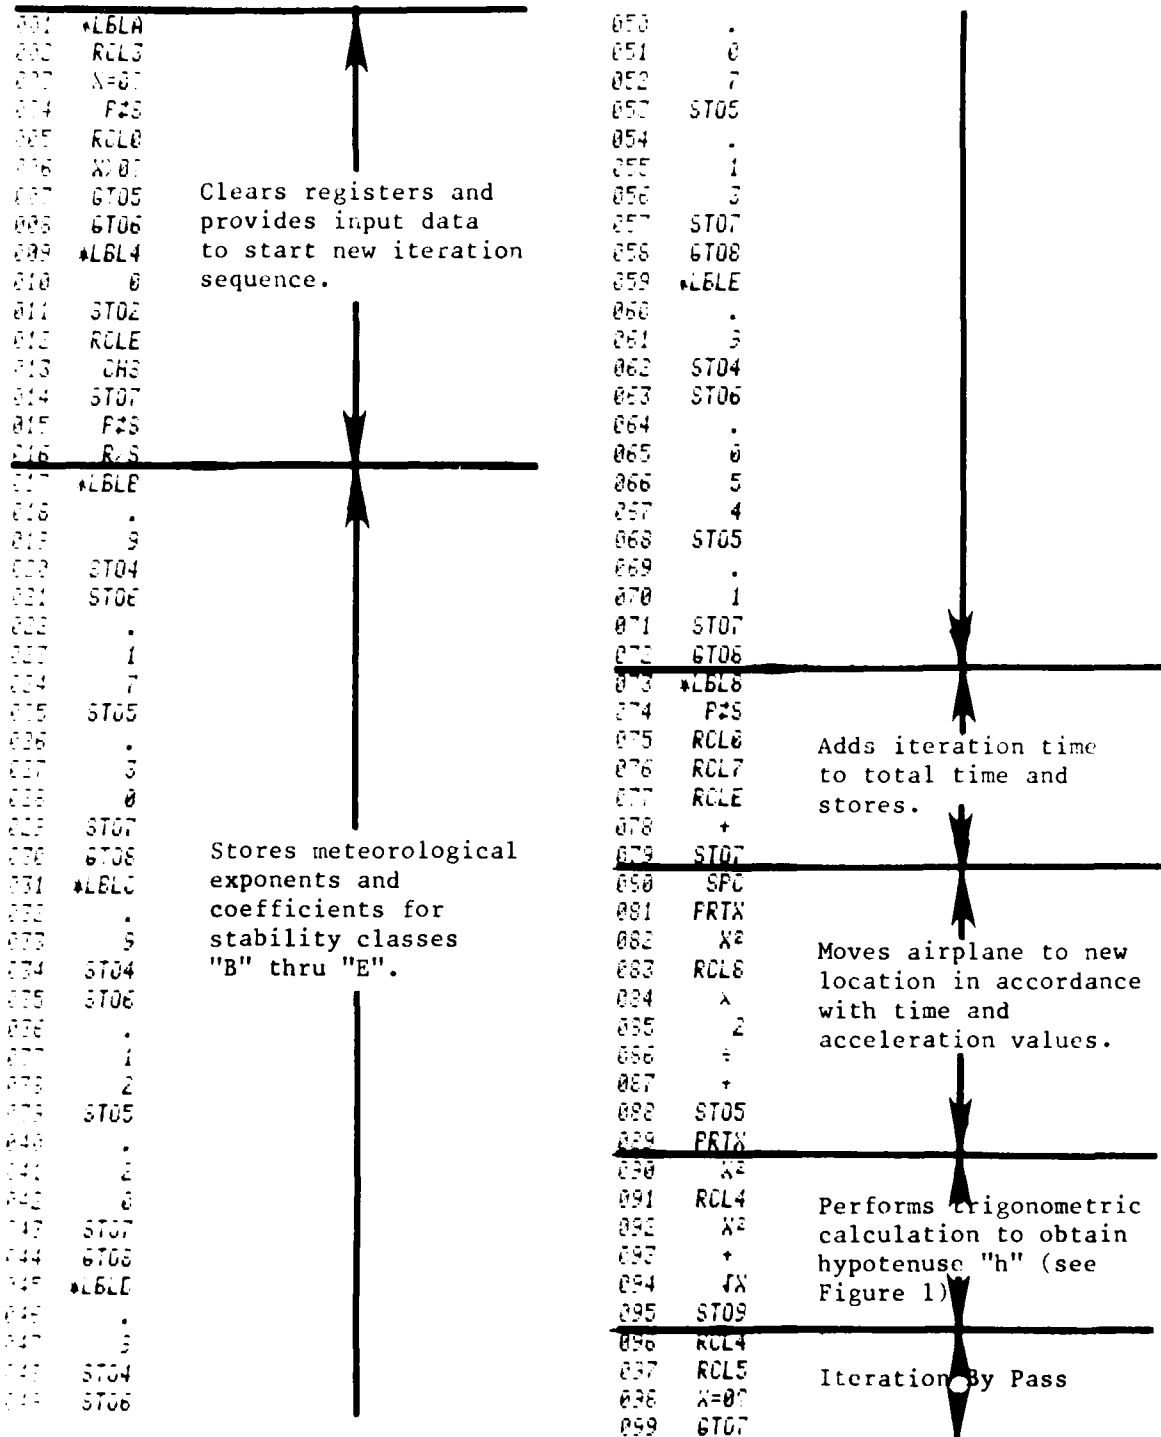

```

100 =
101 TANH
102 XG7
103 GSB9
104 RCLD
105 -
106 XG7 Performs trigonometric
107 CHS calculation to determine
108 COS "x" distance.
109 XG7
110 GTOT
111 RCL5
112 ^
113 F25
114 STD1
115 X2
116 CHS
117 F25
118 RCL5 Performs trigonometric
119 X2 calculation to determine
120 + "y" distance.
121 X
122 STD0
123 F25
124 RCL1
125 RCL3
126 +
127 STD8
128 RCL6
129 RCL4 Performs calculation
130 ^ to determine final
131 RCL5 sigma "z" (initial
132 X plus distance-related
133 X2 sigma's).
134 STD9
135 RCL2
136 X2
137 +
138 X
139 STD5
140 RCL8
141 RCL6
142 X
143 RCL7
144 X
145 X2
146 STD4 Performs calculation
147 F25 to determine final
148 RCL6 sigma "y".
149 X2
150 F25
151 +
152 X
153 STD4
154 RCL8
155 RCL5
156 +
157 X2
158 .
159 5

```

Performs trigonometric calculation to determine "x" distance.

Performs trigonometric calculation to determine "y" distance.

Performs calculation to determine final sigma "z" (initial plus distance-related sigma's).

Performs calculation to determine final sigma "y".

Determines value for plume height function.

```

160 CHS
161 X
162 e'
163 F25
164 STD1
165 RCL4
166 RCL4
167 =
168 X2
169 .
170 5
171 CHS
172 ^
173 e'
174 STD8
175 F25
176 RCL6
177 F1
178 +
179 RCL4
180 =
181 RCL5
182 =
183 RCL1
184 +
185 .
186 0
187 0
188 1
189 5
190 +
191 F25
192 RCL1
193 X
194 RCL3
195 ^
196 RCL2
197 +
198 STD7
199 FRT8 Prints total dose.
200 F25
201 GTD8
202 *LBL5
203 1
204 0
205 0
206 +
207 RTN
208 *LBL7
209 F25
210 GTD8
211 *LBL5
212 7
213 5
214 -
215 STD8
216 GTD4
217 *LBL6
218 7
219 5
220 -
221 STD8
222 GTD4
223 6.5

```

Determines value of crosswind function.

Performs dose calculation.

Determines final dose corrected for plume height and crosswind distances and adds to previous dose sum.

Prints total dose.

Miscellaneous Subroutines

Figure 3

REGISTERS AND LABELS

REGISTERS

Primary

- 0 emission rate
- 1 "x" distance
- 2 initial sigma "z"
- 3 zero register
- 4 sigma "z" exponent
- 5 sigma "y" coefficient
- 6 sigma "y" exponent
- 7 sigma "z" coefficient
- 8 total distance (1+3)
- 9 sigma "z"
- A sigma "y"
- B plume height
- C "y" distance
- D wind angle
- E iteration time
- I wind velocity

Secondary

- 0 fixed source receptor distance along runway
- 1 plume rise factor
- 2 dose summation
- 3 sidewind "y" factor
- 4 fixed distance -receptor to runway
- 5 variable distance between source and receptor in the runway direction
- 6 initial sigma "y"
- 7 time at runway location
- 8 acceleration
- 9 hypotenuse ("h" in Figure 2)

LABELS

- A program to clear registers and make required inputs for new iteration sequence
- B,C,D,E, Storage of coefficients and exponents for sigma calculations - stability classes B,C,D, and E
- 4 subroutine for Label A
- 5 subroutine for Label A
- 6 subroutine for Label A
- 7 subroutine to switch registers
- 8 main program to move airplane along runway and to calculate dosage
- 9 subroutine of Label 8

Figure 4

INPUTS and OUTPUTS

INPUTS

Item	Units	Keys
Primary Register (P)		
source emissions over duration of event- emission rate x iteration time	grams	Sto 0
initial sigma "z"	meters	Sto 2
plume height	meters	Sto B
wind angle	degrees	Sto D
iteration interval	seconds	Sto E
wind velocity	meters per second	Sto I

Secondary Register

fixed source receptor distance along runway	meters	Sto 0
fixed distance from receptor to runway	meters	Sto 4
initial sigma "y"	meters	Sto 6
beginning time	seconds	Sto 7
acceleration	meters/sec/sec	Sto 8

OUTPUTS

total elapsed time at iteration	seconds	Prnt 7
fixed source-receptor distance along runway	meters	Prnt 0
dose sum	parts per million sec.	Prnt 2

Figure 5
EMISSION TAIL GEOMETRY

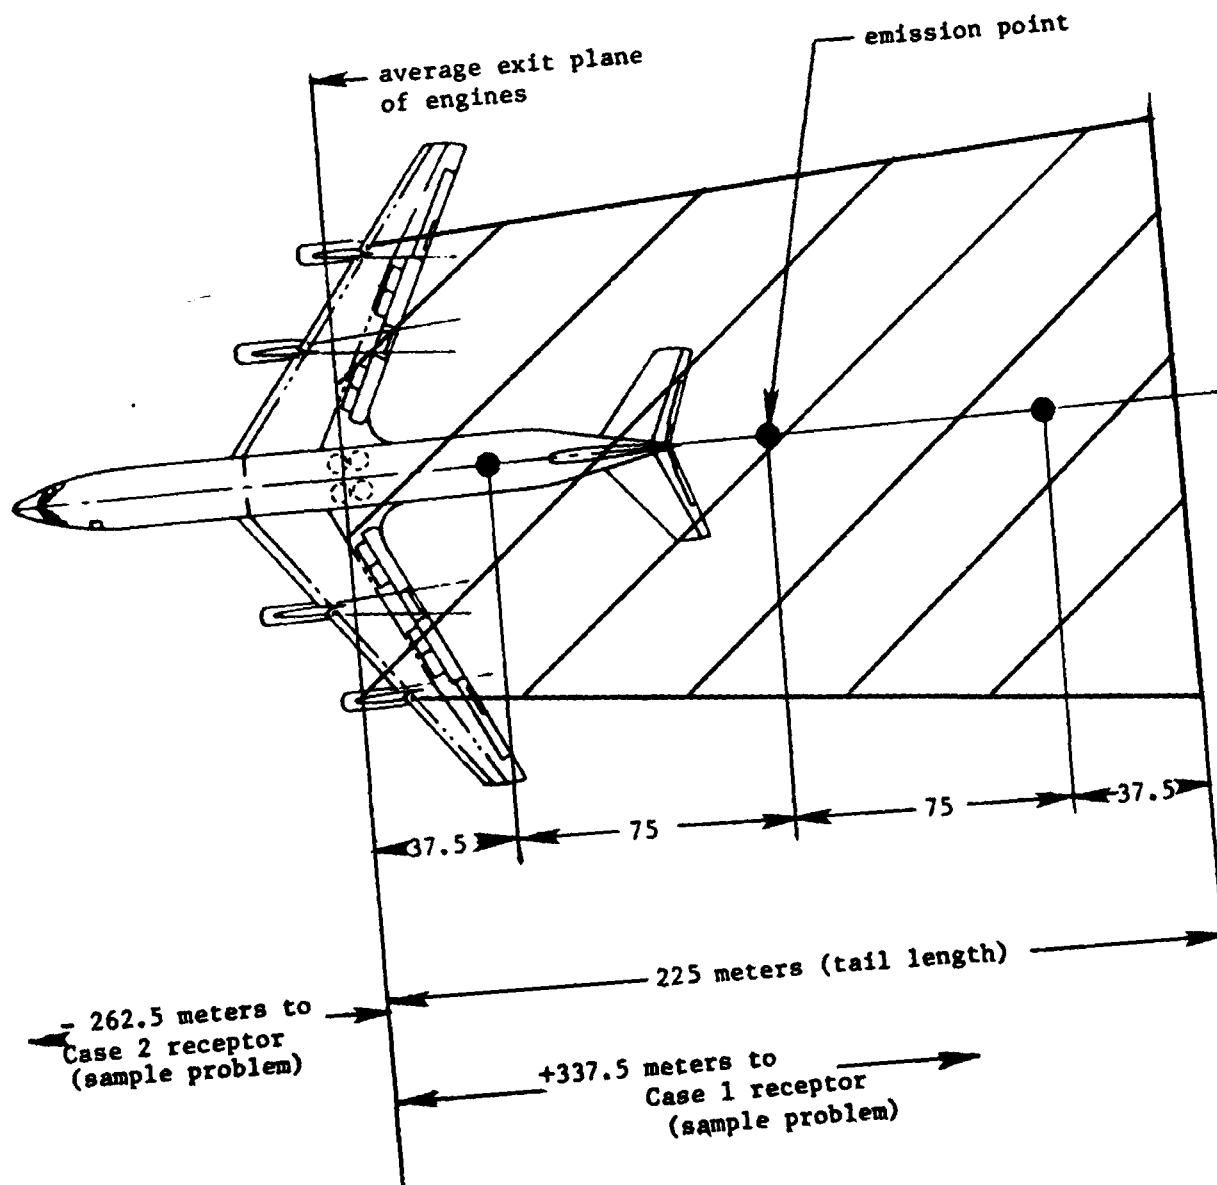


Figure 6

SAMPLE PROBLEM INPUTS - Case 1

INPUTS	Item	No./ Units	Keys*	
Address Primary Register	source emissions **over duration of event (emiss. rate x iter. time) (80 gm/s x 1 sec.)	80 grams	Sto 0	
	initial sigma "z"	8 meters	Sto 2	
	plume height	4 meters	Sto B	
	wind angle	30 degrees	Sto D	
	iteration interval	1 second	Sto E	
	wind velocity	5 meters per second	Sto I	
	Address Secondary Register			f, P-S
	fixed source receptor distance along runway	+300 meters	Sto 0	
fixed distance from receptor to runway	200 meters	Sto 4		
initial sigma "y"	16 meters	Sto 6		
beginning time ***	-1 second	Sto 7		
acceleration ****	1.3 meters/sec/sec	Sto 8		
Readdress Primary Register			f, P-S	

- * Applicable to both HP-97 and HP-67 calculators except that the wind velocity is loaded into the HP-67 calculator by depressing the black "h" key followed by the black lettered "ST I" key.
- ** Possible data source - (7).
- *** For a beginning time of zero, the negative value of the iterative duration must be input. This is accomplished by entering the duration value followed by the "CHS" key.
- **** Possible data source - Aircraft Performance Manuals.

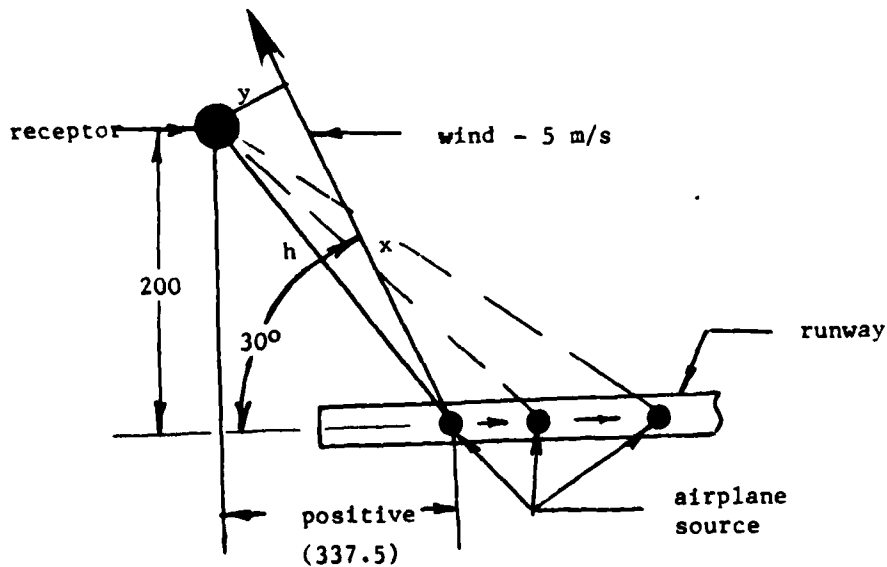


Figure 7

SAMPLE PROBLEM INPUTS - Case 2

Item	No./ Units	Keys*
Address Primary Register		none
source emissions **over		
duration of event (emiss. rate x iter. time) (80 gm/s x 1 sec.)	80 grams	Sto 0
initial sigma "z"	8 meters	Sto 2
plume height	4 meters	Sto B
wind angle	30 degrees	Sto D
iteration interval	1 seconds	Sto E
wind velocity	5 meters per second	Sto I
Address Secondary Register		f, P-S
fixed source receptor distance along runway	-300 meters	Sto 0
fixed distance from receptor to runway	100 meters	Sto 4
initial sigma "y"	16 meters	Sto 6
beginning time ***	-1 seconds	Sto 7
acceleration ****	1.3 meters/sec/sec	Sto 8
Readdress Primary Register		f, P-S

* Applicable to both HP-97 and HP-67 calculators except that the wind velocity is loaded into the HP-67 calculator by depressing the black "h" key followed by the black lettered "ST I" key.

** Possible data source - (7).

*** For a beginning time of zero, the negative value of the iterative duration must be input. This is accomplished by entering the duration value followed by the "CHS" key.

**** Possible data source - Aircraft Performance Manuals.

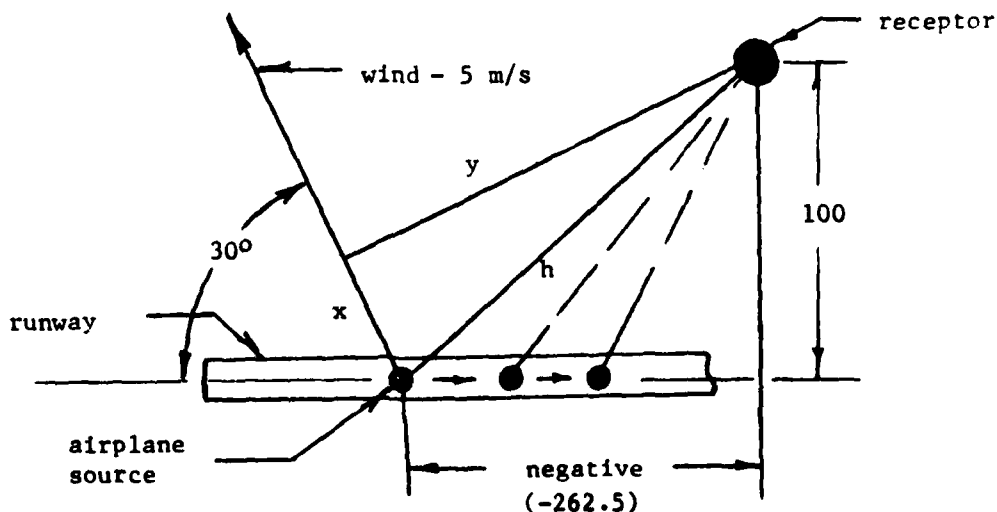


Figure 8 (CONT.)

7.00	***	51.00	***
259.85	***	511.85	***
51.16	***	55.43	***
8.00	***	55.00	***
269.60	***	557.60	***
7.00	***	55.55	***
9.00	***	55.00	***
277.65	***	558.65	***
10.00	***	55.55	***
10.00	***	55.00	***
283.00	***	559.40	***
10.46	***	55.55	***
11.00	***	55.00	***
287.95	***	571.95	***
10.00	***	55.55	***
10.00	***	55.00	***
293.50	***	584.40	***
05.97	***	55.55	***
10.00	***	57.00	***
294.85	***	590.85	***
05.54	***	55.00	***
14.00	***	55.00	***
298.40	***	704.00	***
06.07	***	55.00	***
15.00	***	55.00	***
277.25	***	777.25	***
41.00	***	55.00	***
16.00	***	70.00	***
281.40	***	810.00	***
43.04	***	55.00	***
17.00	***	71.00	***
412.85	***	849.85	***
50.07	***	55.00	***
18.00	***	70.00	***
475.60	***	887.60	***
57.65	***	55.00	***
19.00	***	77.00	***
453.65	***	909.65	***
54.92	***	55.00	***
20.00	***	74.00	***
465.00	***	971.40	***
55.00	***	55.00	***

Start Third Iteration

time	0.00	***
distance	150.00	***
dose	1.670000000000	***
	1.00	***
	150.00	***
	3.560000000000	***
	0.00	***
	150.00	***
	5.910000000000	***
	0.00	***
	150.00	***
	8.650000000000	***
	4.00	***
	160.40	***
	1.640000000000	***
	0.00	***
	160.00	***
	3.050000000000	***
	0.00	***
	170.40	***
	0.00	***
	0.00	***
	181.85	***
	0.00	***
	0.00	***
	191.60	***
	0.04	***
	0.00	***
	200.65	***
	0.00	***
	0.00	***
	215.00	***
	0.04	***
	0.00	***
	229.65	***
	0.00	***

Figure 9

RESULTS - Case 2

20.00	2	6.00	***	22.00	***
3.75	1	-275.60	***	42.85	***
5.00	2			51.75	***
3.00	3	7.00	***		
2.00	4	-269.15	***	29.00	***
3.00	5			74.40	***
0.00	6	9.00	***	81.00	***
0.00	7	-258.40	***		
3.00	8			25.00	***
3.00	9	9.00	***	100.00	***
3.00	A	-247.75	***	11.75	***
4.00	B				
0.00	C	10.00	***	20.00	***
20.00	D	-235.00	***	100.40	***
1.00	E			11.00	***
5.00	I	11.00	***	27.00	***
		-221.35	***	100.00	***
				20.00	***
-200.00	6	12.00	***		
0.00	1	-203.40	***		
0.00	2			20.00	***
0.00	3	13.00	***	200.00	***
100.00	4	-190.15	***	21.75	***
0.00	5				
16.00	6	14.00	***	20.00	***
-1.00	7	-172.60	***	240.00	***
1.00	8			24.00	***
0.00	9	15.00	***		
0.00	A	-153.75	***	20.00	***
4.00	B			200.00	***
0.00	C	16.00	***	20.75	***
30.00	D	-137.60	***		
1.00	E			20.00	***
5.00	I	17.00	***	200.00	***
		-112.15	***	21.00	***
0.00	***	18.00	***	20.00	***
-200.00	***	-69.40	***	200.00	***
				24.00	***
1.00	***	19.00	***		
-209.75	***	-65.35	***		
2.00	***	20.00	***		
-207.40	***	-40.00	***		
		4.745992363-05	***		
7.00	***	21.00	***		
-204.15	***	-13.75	***		
		1.197465957-06	***		
4.00	***				
-209.60	***				
		22.00	***		
5.00	***	14.60	***		
-207.75	***	1.752964877-04	***		

Figure 9 (CONT.)

		3.00 ***		
		-146.35 ***		
0.00 ***			0.00 ***	
-375.00 ***		20.00 ***	-450.00 ***	
		-115.00 ***		
1.00 ***		21.00 ***	1.00 ***	
-374.75 ***		-113.25 ***	-449.75 ***	
2.00 ***		22.00 ***	2.00 ***	
-373.40 ***		-111.40 ***	-447.40 ***	
3.00 ***		23.00 ***	3.00 ***	
-372.15 ***		-109.15 ***	-444.15 ***	
4.00 ***	3.136729735-00 ***	24.00 ***	4.00 ***	
-369.60 ***		-106.60 ***	-439.60 ***	
5.00 ***		25.00 ***	5.00 ***	
-368.75 ***	1.023259075-05 ***	-104.25 ***	-437.75 ***	
6.00 ***		26.00 ***	6.00 ***	
-367.60 ***	2.17077045-02 ***	-101.25 ***	-435.60 ***	
7.00 ***		27.00 ***	7.00 ***	
-367.15 ***		-98.40 ***	-433.15 ***	
8.00 ***		28.00 ***	8.00 ***	
-366.40 ***		-95.20 ***	-430.40 ***	
9.00 ***		29.00 ***	9.00 ***	
-365.75 ***		-91.85 ***	-427.35 ***	
10.00 ***		30.00 ***	10.00 ***	
-364.80 ***	134.60 ***	-88.00 ***	-423.80 ***	
11.00 ***	3.00 ***	31.00 ***	11.00 ***	
-363.75 ***		-83.25 ***	-419.75 ***	
12.00 ***		32.00 ***	12.00 ***	
-362.40 ***	171.65 ***	-78.15 ***	-415.40 ***	
13.00 ***		33.00 ***	13.00 ***	
-360.60 ***	210.00 ***	-72.60 ***	-410.60 ***	
14.00 ***		34.00 ***	14.00 ***	
-359.60 ***	248.65 ***	-66.30 ***	-405.60 ***	
15.00 ***		35.00 ***	15.00 ***	
-358.75 ***	287.65 ***	-59.20 ***	-400.75 ***	
16.00 ***		36.00 ***	16.00 ***	
-358.00 ***	326.80 ***	-51.20 ***	-395.80 ***	
17.00 ***		37.00 ***	17.00 ***	
-357.15 ***	366.10 ***	-42.30 ***	-390.15 ***	
18.00 ***		38.00 ***	18.00 ***	
-356.40 ***	405.40 ***	-32.40 ***	-383.40 ***	
19.00 ***		39.00 ***	19.00 ***	
-355.40 ***	444.80 ***	-21.60 ***	-375.40 ***	

Figure 9 (CONT.)

19.00 ***	
-276.40 ***	
19.00 ***	
-215.35 ***	
20.00 ***	
-198.00 ***	
21.00 ***	21.00 ***
-197.35 ***	174.65 ***
	21.07 ***
22.00 ***	
-135.40 ***	22.00 ***
	215.60 ***
23.00 ***	23.45 ***
-105.15 ***	
	23.00 ***
24.00 ***	257.85 ***
-75.60 ***	23.07 ***
25.00 ***	24.00 ***
-43.75 ***	201.40 ***
2.001602654-09 ***	20.32 ***
26.00 ***	25.00 ***
-10.60 ***	345.25 ***
2.022515957-05 ***	20.32 ***
27.00 ***	26.00 ***
27.85 ***	302.40 ***
7.707003553-04 ***	20.32 ***
28.00 ***	
59.60 ***	
2.07 ***	
29.00 ***	
95.65 ***	
1.61 ***	
30.00 ***	
135.00 ***	
5.72 ***	

REFERENCES

1. Wang, I.T., L. A. Conley, D. M. Rote, Airport Vicinity Air Pollution Model Users Guide, Argonne National Laboratory, Argonne, IL, FAA Report No. FAA-RD-75-230, Dec. 1975.
2. Slade, D. H., Meteorology and Atomic Energy 1968; U.S. Atomic Energy Commission, July 1968.
3. Turner, D. B., Workbook of Atmospheric Dispersion Estimates, U.S. Department of Health, Education and Welfare, Cincinnati, Ohio, Revised 1970.
4. Smith, D.G., R.J. Yarmartino, C. Benkley, R. Isaacs, J. Lee, D. Chang, Concorde Air Quality Monitoring and Analysis Program at Dulles International Airport, Federal Aviation Administration, Washington, D.C., Report No. FAA-AEQ-77-14, December 1977.
5. Yarmartino, R.J., D.G. Smith, S.A. Bremer, D. Heinold, D. Lamech, and B. Taylor, Impact of Aircraft Emissions on Air Quality in the Vicinity of Airports, Federal Aviation Administration, Washington, D.C., Report No. FAA-EE-80-09A&09B, July 1980.
6. Tank, W.C., B.K. Hodder, "Engine Exhaust Plume Growth in the Airport Environment, Proceedings Air Quality and Aviation: An International Conference, Reston, Virginia, October 16-18, 1978, Federal Aviation Administration, Washington, D.C., Report No. FAA-EE-78-26.
7. Segal, H.W., Emissions from Queuing Aircraft, Air Pollution Control Association, 73rd Annual Meeting, June 1980, Montreal, Canada, Paper 80-3.5
8. U.S. Environmental Protection Agency, Compilation of Air Pollution Emission Factors - Third Edition, AP-42 Supplement 10, Research Triangle Park, North Carolina 27711, February 1980.

DATA FILM

