

AD-A113 228 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
TAEGU AB, KOREA. REVISED UNIFORM SUMMARY OF SURFACE WEATHER OBS--ETC(U)
OCT 81

UNCLASSIFIED USAFETAC/DS-81/100 SBI-AD-E850 142 NL

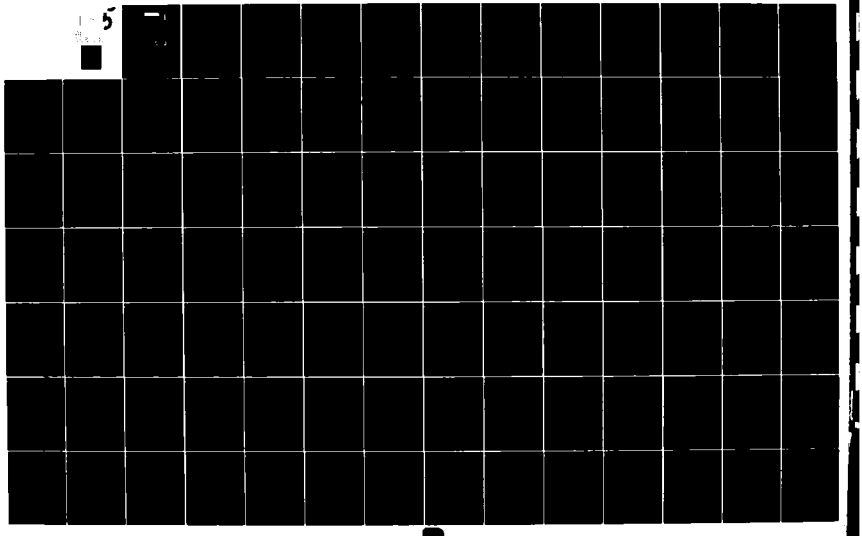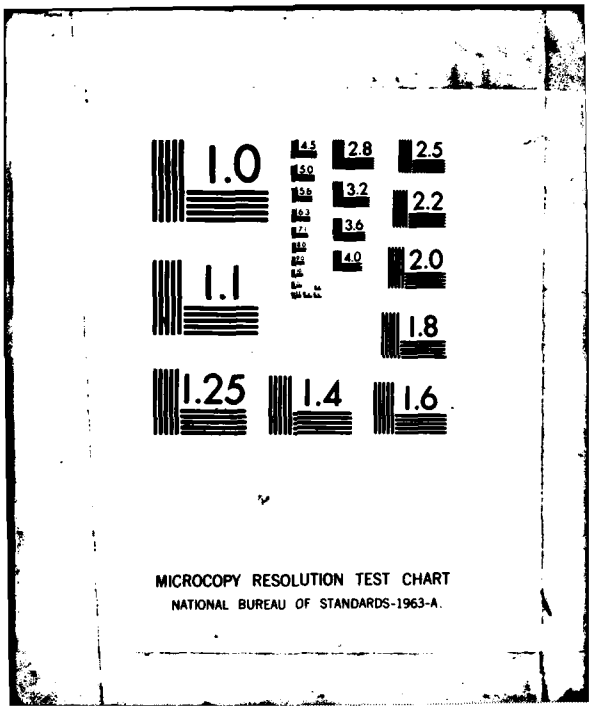


1.0
1.1
1.25
1.4
1.6
2.8
3.2
3.6
4.0
2.5
2.2
2.0
1.8
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A.

PHOTOGRAPH THIS SHEET

[redacted]

AD-E850 142

ATTENTION:
Camera Operator
When Filming attached document
use Bell & Howell camera ONLY!!!
Consult with Supervisor for
further instructions.

LEVEL

INVENTORY

AD A113228

DTIC ACCESSION NUMBER

USAFETAC/DS-81/100

DOCUMENT IDENTIFICATION

7 Oct. 81

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

DISTRIBUTION STATEMENT

ACCESSION FOR	
NTIS	GRA&I
DTIC	TAB
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION /	
AVAILABILITY CODES	
DIST	AVAIL AND/OR SPECIAL
A	

DTIC COPY INSPECTED

DISTRIBUTION STAMP

DTIC
ELECTE
S APR 5 1982 D
D

DATE ACCESSIONED

Supersedes: AD-A110 245,
Rept. No. USAFETAC/DS-81/095

82 08 10 065

415 pp

DATE RECEIVED IN DTIC

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-DDA-2

DTIC FORM OCT 79 70A

DOCUMENT PROCESSING SHEET

ADE 850 142

= USAFETAC/DS-81/100

DATA PROCESSING DIVISION
USAFETAC
Air Weather Service (MAC)

REVISED UNIFORM SUMMARY OF
SURFACE WEATHER OBSERVATIONS

TAEGU AB KO WBAN #43212
N 35 54 E 128 39 FLD ELEV 121 FT RKTN WMO #47142

PARTS A,C-F
POR FROM HOURLY OBS: JUN 68 - SEP 70, OCT 73 - MAY 81

TIME CONVERSION GMT TO LST: +9

OCT 07 1981

FEDERAL BUILDING
ASHEVILLE, N. C.

"THIS DOCUMENT HAS BEEN APPROVED FOR PUBLIC RELEASE AND SALE; ITS DISTRIBUTION IS UNLIMITED."

Review and Approval Statement

This report is approved for public release. There is no objection to unlimited distribution of this report to the public at large, or by DDC to the National Technical Information Service (NTIS).

This technical report has been reviewed and is approved for publication.

Wayne E McCollom

WAYNE E. MCCOLLOM, Chief
Technical Information Section
USAFETAC/TST

FOR THE COMMANDER

Walter S. Burgmann

WALTER S. BURGMANN
AWS Scientific and Technical
Information Officer (STINFO)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

ADE 850 142

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1 REPORT NUMBER: USAFETAC/DS- 81/100	2. GOVT ACCESSION NO.: AD-A113 228
3. RECIPIENT'S CATALOG NUMBER:	
4. TITLE (and Subtitle): Revised Uniform Summary of Surface Weather Observations (RUSSWO)- Taegu AB, Korea	5 TYPE OF REPORT & PERIOD COVERED: Final rept.
	6 PERFORMING ORG. REPORT NUMBER:
7. AUTHOR(s):	8. CONTRACT OR GRANT NUMBER(s):
9 PERFORMING ORGANIZATION NAME AND ADDRESS: USAFETAC/OL-A Air Force Environmental Technical Appl. Center Scott AFB IL 62225	10 PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS:
11 CONTROLLING OFFICE NAME AND ADDRESS: USAFETAC/CBD Air Weather Service (MAC) Scott AFB IL 62225	12 REPORT DATE: 7 OCT 81
	13. NUMBER OF PAGES: p. 400
14 MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office):	15. SECURITY CLASS. (of this report): UNCLASSIFIED
	15a DECLASSIFICATION DOWNGRADING SCHEDULE:

16 DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17 DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18 SUPPLEMENTARY NOTES

Supersedes Rept. no. USAFETAC/DS-81/095, AD-A110 245.

19 KEY WORDS (Continue on reverse side if necessary and identify by block number)

*RUSSWO	Daily temperature	Atmospheric pressure
Snowfall	Extreme snow depth	Extreme surface winds
Climatology	Sea-level pressure	Psychrometric summary
Surface Winds	Extreme temperature	Ceiling versus visibility
Relative humidity	*Climatological data	(over)

20 ABSTRACT (Continue on reverse side if necessary and identify by block number)

This report is a six-part statistical summary of surface weather observations for Taegu AB, Korea
It contains the following parts: (A) Weather Conditions; Atmospheric Phenomena; (B) Precipitation, Snowfall and Snow Depth (daily amounts and extreme values); (C) Surface winds; (D) Ceiling Versus Visibility; Sky Cover; (E) Psychrometric Summaries (daily maximum and minimum temperatures, extreme maximum and minimum temperatures, psychrometric summary of wet-bulb temperature depression versus dry-bulb temperature, means and standard deviations of dry-bulb, wet-bulb (over)

DD FORM 1 JAN 73 1473

UNCLASSIFIED

19. Percentage frequency of distribution tables
Dry-bulb temperature versus wet-bulb temperature
Cumulative percentage frequency of distribution tables

* Korea

* Taegu AB, Korea
Taegu, Korea

20. and dew-point temperatures and relative humidity); and (F) Pressure Summary (means, standard, deviations, and observation counts of station pressure and sea-level pressure). Data in this report are presented in tabular form, in most cases in percentage frequency of occurrence or cumulative percentage frequency of occurrence tables. Period of Record from Hourly OBS: Jun 68 - Sep 70, Oct 73 - May 81.

TAEGU AB, KOREA

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

REVISED UNIFORM SUMMARY
OF SURFACE WEATHER OBSERVATIONS

HOURLY OBSERVATIONS

Hourly observations are defined as those record or record-special observations recorded at scheduled hourly intervals.

DAILY OBSERVATIONS

Daily observations are selected from all data recorded on reporting forms and combined into a summary of the day observations. (Selected from record-special, local, summary of the day, remarks, etc.)

DESCRIPTION OF SUMMARIES

Preceding each section is a brief description of the data comprising each part of the Revised Uniform Summary of Surface Weather Observations and the manner of presentation. Summaries are prepared from hourly and daily observations recorded by stations operated by the U. S. Services and some foreign stations with similar reporting practices.

Unless otherwise noted the following summaries are included for this station:

PART A WEATHER CONDITIONS
ATMOSPHERIC PHENOMENA DATA NOT AVAILABLE

PART B PRECIPITATION DATA NOT AVAILABLE
SNOWFALL DATA NOT AVAILABLE
SNOW DEPTH DATA NOT AVAILABLE

PART C SURFACE WINDS

PART D CEILING VERSUS VISIBILITY
SKYCOVER DATA NOT AVAILABLE

PART E DAILY MAX, MIN, & MEAN TEMP
EXTREME MAX & MIN TEMP
PSYCHROMETRIC-DRY VS WET BULB
MEAN & STD DEV .
(DRY BULB, WET BULB, & DEW POINT)
RELATIVE HUMIDITY

PART F STATION PRESSURE
SEA LEVEL PRESSURE DATA NOT AVAILABLE

STANDARD 3-HOUR GROUPS

All summaries requiring diurnal variations are summarized in eight 3-hour periods corresponding to the following sets of hourly observations: 0000-0259, 0300-0559, 0600-0859, 0900-1159, 1200-1459, 1500-1759, 1800-2059, 2100-2359 hours local standard time.

MISSING HOUR GROUPS

Summary sheets are omitted when stations maintaining limited observing schedules did not report certain three-hour periods for any particular month during the available period of record. Such missing sheets are listed below, and are applicable to all summaries prepared from hourly observations.

JANUARY_____	APRIL_____	JULY_____	OCTOBER_____
FEBRUARY_____	MAY_____	AUGUST_____	NOVEMBER_____
MARCH_____	JUNE_____	SEPTEMBER_____	DECEMBER_____

STATION NO ON SUMMARY	STATION NAME	LATITUDE	LONGITUDE	FIELD ELEV (FT.)	CALL SIGN	WMO NUMBER
43212	TAEGU AB KOREA K-2	N 35 54	E 128 39	121	RKTN	47142

STATION LOCATION AND INSTRUMENTATION HISTORY

NUMBER OF LOCATION	GEOGRAPHICAL LOCATION & NAME	TYPE OF STATION	AT THIS LOCATION		LATITUDE	LONGITUDE	ELEVATION ABOVE MSL		OBS PER DAY
			FROM	TO			FIELD (FT)	HT. BARO.	
1	Taegu AB Korea	AAB	Nov 50	Mar 55	N 35 54	E 128 39	115	98	24
2	Same	Same	Apr 55	Nov 55	Same	Same	96	Same	24
3	Same	ROKAF	Dec 55	Jul 66	Same	Same	N/A	N/A	24
4	Same	Same	Aug 66	May 81	Same	Same	N/A	N/A	24

NUMBER OF LOCATION	DATE OF CHANGE	SURFACE WIND EQUIPMENT INFORMATION				REMARKS, ADDITIONAL EQUIPMENT, OR REASON FOR CHANGE
		LOCATION	TYPE OF TRANSMITTER	TYPE OF RECORDER	HT ABOVE GROUND	
1	Nov 50to Mar 55	Located on Tower at SW end of Weather Station.	ML 203B	None	18 Ft	Closed week-ends/holidays 7301-8105
2	Apr 55to Nov 55	Located over the Weather Station.	AN/GMQ-1	None	16 Ft	
3	Dec 55to May 81	Not available.	N/A	N/A	N/A	

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

A

PART A WEATHER CONDITIONS

This summary is a percentage frequency occurrence of various atmospheric phenomena and obstructions to vision, derived from hourly observations, and is presented in two tables as follows:

1. By month and annual, all hours and years combined.

2. By month, all years combined, by standard 3-hour groups.

A percent value of ".0" in these tables indicates less than .05 percent, which is usually only one occurrence. The various phenomena included in each category on the forms are listed below:

Thunderstorms - All reported occurrences of thunderstorm, tornado, and waterspout.

Rain and/or drizzle - All liquid precipitation, falling to the ground, not freezing.

Freezing rain and/or freezing drizzle (glaze) - Precipitation falling in liquid form, but freezing on contact with an unheated surface.

Snow and/or sleet (ice pellets) - Included are snow, snow pellets, sleet, snow grains, ice crystals, and ice pellets from Jan 68 and later. (Snow pellets also known as soft hail)

Hail - Occurrences of hail and small hail are included.

Percentage of observations with precipitation - Included in this category are the observations when one or more of the above phenomena occurred. Since more than one type of precipitation may be reported in the same observation, the sums of the individual categories may exceed the percentages of the observations with precip.

Fog - Included are fog, ice fog, and ground fog.

Smoke and/or haze - Occurrences of smoke, haze, or combinations of smoke and haze are included.

Blowing snow - Occurrences of blowing snow (also drifting snow when reported from non-WBAN sources).

Dust and/or sand - Included are blowing dust, blowing sand, and dust.

Continued on Reverse

Blowing spray - This item if reported, is not shown in a separate category on this form but is included in the computation Percentage of Observations with Obstructions to Vision, below.

Percentage of observations with obstructions to vision - Included in this category are the observations when one or more of the above obstructions to vision occurred. Since more than one type of obstruction may be reported in the same observation, the sums of the individual categories may exceed the percentage total columns. Also, although precipitation may reduce visibility, it is not considered an obstruction to vision for purposes of this summary; therefore, the percentage total of obstructions to vision need not reflect the total observations with reduced visibility.

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47112 | TAEGU AB KO | 69-70,74-81 | JAN
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	00-02		2.8		1.5		4.1	11.5	.1			11.7	754
	03-05		1.4		2.2		3.6	15.7				15.7	773
	06-08		2.2		1.8		4.0	22.5	.4			23.9	778
	09-11		1.6		2.1		3.7	25.6	4.8			3 .3	755
	12-14		1.8		2.4		4.2	6.3	12.7			19.1	762
	15-17		3.1		1.2		4.3	1.2	8.5			9.7	766
	18-20		3.3		.5		3.8	5.7	3.7			9.4	789
	21-23		1.6		2.4		3.9	9.9	.9			10.8	805
TOTALS			2.2		1.8		4.0	12.3	3.9			16.2	6162

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47212 | TAEGU AB KO | 69-70,74-81 | FEB
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS
FEB	00-02		4.8		1.0		5.6	10.4	.9		.1	11.4	691
	03-05		5.7		1.0		6.6	14.8	.6		.4	15.8	702
	06-08		5.5		1.0		6.4	22.7	.7		.1	23.5	724
	09-11		4.4	.1	1.3		5.9	21.3	7.7		.3	29.3	700
	12-14		4.5		1.6		6.1	5.1	15.5		.1	20.8	689
	15-17		3.9		.7		4.6	4.3	9.0		.3	13.6	700
	18-20		3.0		1.0		4.0	6.2	4.6		.6	11.3	725
	21-23	.1	4.7		.8	.1	5.7	9.4	1.4		.6	11.3	725
TOTALS		.0	4.6	.0	1.1	.0	5.6	11.8	5.1		.3	17.1	5656

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47 12 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | MAR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS.
MAR	00-02		3.7		.4		4.2	6.6	.4		.9	7.3	669
	03-05		5.3		.7		6.6	10.5	.1		.7	11.4	678
	06-08		5.3		.9		6.2	26.7	1.0		1.4	29.2	692
	9-11		4.1		.3		4.4	22.0	11.4		1.1	34.4	665
	12-14		4.0		.3		4.3	4.8	10.9		1.6	17.3	671
	15-17		4.1		.1		4.2	2.3	5.3		1.9	9.2	686
	18-20		5.1				5.1	2.9	2.0		.7	5.6	693
	21-23		3.4		.7		4.1	5.9	1.5		.4	7.9	712
TOTALS			4.4		.4		4.8	10.1	4.3		1.1	15.3	5466

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5(OL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GL..RAL CLIMATOLOGY BRANCH
..SAFETAC
AI.. .EATHER SERVICE/MAC

WEATHER CONDITIONS

43512	TAEGU AB KO	69-70,74-79,81	APR
STATION	STATION NAME	YEARS	MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
APR	00-02	.2	9.3				9.3	6.5	.8		2.2	9.4	646
	03-05		7.2			.1	7.4	15.1	.9		1.3	17.3	677
	06-08		7.3				7.3	29.8	1.8		1.2	32.7	684
	09-11		7.5				7.5	15.0	14.0		2.0	31.0	694
	12-14		10.5				10.5	2.5	8.7		3.1	14.3	686
	15-17		11.2				11.2	2.5	4.4		3.4	10.3	681
	18-2		9.9				9.9	2.6	2.5		3.0	8.3	707
	21-23		10.3				10.3	4.1	1.2		2.5	7.8	680
TOTALS		.0	9.2			.0	9.2	9.8	4.3		2.3	16.4	5455

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47612 | TAEGU AB KO | 69-70,74-79,81 | MAY
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO OF OBS.
MAY	00-02	.1	8.7				8.7	7.7	.4		1.3	9.5	686
	03-05	.1	7.8				7.8	16.4	.3		1.3	17.9	727
	06-08		5.7				5.7	28.9	2.4		1.2	32.6	736
	09-11		6.4				6.4	15.2	16.8		1.1	33.1	722
	12-14		8.5				8.5	3.8	10.3		.3	14.4	729
	15-17	.3	8.1				8.1	2.3	4.9		1.4	8.6	731
	18-20	.3	9.2				9.2	2.1	3.4		1.3	6.9	757
	21-23	.1	9.6				9.6	5.5	1.7		1.3	8.6	757
TOTALS		.1	8.0				8.0	10.2	5.0		1.2	16.5	5838

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47112 | TAEGU AB KO | 68-72,74-79 | JUN
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JUN	00-02	.3	8.4				8.4	17.4				17.4	654
	03-05	.1	9.4				9.4	26.7				26.7	682
	06-08	.4	8.3				8.3	33.8	1.6			35.6	677
	09-11	.1	9.0				9.0	26.6	11.2		.1	37.9	68[illegible]
	12-14	.1	9.8				9.8	7.0	14.7			21.7	701
	15-17	.7	9.6			.1	9.7	3.6	9.4			13.0	700
	18-20	1.1	10.0				10.0	5.6	6.1			11.7	700
	21-23	.9	9.2				9.2	14.2	.9			15.0	699
TOTALS		.5	9.2			.0	9.2	16.9	5.5		.[illegible]	22.4	5493

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47012 | TAEGU AB KO | 68-70,74-79 | JUL
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JUL	00-02	1.0	13.4				13.4	20.9	.1			21.0	660
	03-05	.8	12.0				12.0	32.6				32.6	734
	06-08	.3	12.5				12.5	41.4	.7			42.1	720
	09-11	.1	11.8				11.8	27.8	10.6			38.4	737
	12-14	.3	14.3				14.3	9.6	11.7			21.3	726
	15-17	1.1	12.4				12.4	7.2	8.8			16.1	735
	18-20	2.8	12.6				12.6	9.4	5.5			14.9	744
	21-23	2.0	13.3				13.3	14.8	1.9			16.7	744
TOTALS		1.1	12.8				12.8	20.5	4.9			25.4	5820

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47212 | TAEGU AB KO | 68-73,74-79 | AUG
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
AUG	00-02	.6	8.8				8.8	14.1	.4			14.5	695
	03-05	.8	10.2				10.2	23.4	.4			23.8	728
	06-08	.7	9.2				9.2	35.3	.3			35.3	714
	09-11	1.0	9.3				9.3	21.8	11.1			32.9	711
	12-14	1.2	9.5				9.5	3.9	13.6			17.4	723
	15-17	3.3	12.8				12.8	2.4	8.4			10.8	701
	18-20	3.3	9.1				9.1	5.3	4.6			9.6	700
	21-23	2.6	8.7				8.7	12.3	.7			13.3	732
TOTALS		1.7	9.7				9.7	14.7	4.9			19.7	5704

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM MAY 64 0-10-5(OL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47012 | TAEGU AB KO | 68-70,74-79 | SEP
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
SEP	00-02	.9	9.7				9.7	13.7				13.7	663
	03-05	.4	13.2				13.2	26.2				26.2	684
	06-08	.3	9.1				9.1	40.4				40.4	674
	09-11	.1	9.1				9.1	31.3	6.8			38.1	691
	12-14		9.9				9.9	4.7	8.9			13.6	677
	15-17	1.0	10.4				10.4	1.5	3.8			5.3	684
	18-20	1.3	9.4				9.4	3.8	2.3			6.1	689
	21-23	1.2	9.0				9.0	7.2	.4			7.7	691
TOTALS		.7	10.0				10.0	16.1	2.8			19.9	5453

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

43.12 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | OCT MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
OCT	00-02		2.8				2.8	17.7				17.7	645
	3-05		4.5				4.5	35.7				35.7	667
	06-08		5.9				5.9	39.1	.2			39.3	657
	09-11		5.6				5.6	31.2	8.1			39.3	656
	12-14		5.8				5.8	5.3	14.9		.1	20.4	712
	15-17		4.9				4.9	2.6	4.6			7.2	694
	18-20	.3	5.6				5.6	4.0	1.3			5.3	699
	21-23		4.1				4.1	10.5	.1			10.6	688
TOTALS		.0	4.9				4.9	18.3	3.7		.0	21.9	5418

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47 12 | TAEGU AB KO | 68-69,73-79 | NOV
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
NOV	00-02		6.1				6.1	12.4	.3			17.7	661
	03-05		4.2		.1		4.3	24.0				24.3	672
	06-08	.2	4.1				4.1	29.2	.3			29.5	654
	09-11		4.1		.3		4.4	25.6	6.8			32.4	657
	12-14		2.9		.3		3.2	13.3	16.6			26.9	687
	15-17		4.0				4.0	5.1	6.7			11.8	701
	18-20	.1	4.3				4.3	7.3	1.5			8.8	716
	21-23		4.8				4.8	8.1	.4			8.5	703
TOTALS		.0	4.3		.1		4.4	15.3	4.1			19.3	5451

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

USAFETAC FORM JULY 64 0-10-5(GL A), PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47212 | TAEGU AB KO | 68-69,73-80 | DEC
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND/OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
DEC	00-02		2.4		.5		2.9	15.6	.5			16.1	762
	03-05		3.4		.8		4.2	21.5				21.5	790
	06-08		4.4	.1	1.5		6.0	24.5	.1			24.6	747
	09-11		1.6		1.7		3.3	24.5	4.4			28.9	748
	12-14		2.1		.8		2.9	8.5	15.0			23.5	792
	15-17		2.6		.4		3.0	3.2	11.4		.1	14.7	774
	18-20		1.8		.8		2.4	8.4	3.6		.3	12.3	782
	21-23		2.5		.7		3..	12.5	1.6		.1	14.2	808
TOTALS			2.6	.0	.9		3.5	14.8	4.6		.1	19.5	6203

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

WEATHER CONDITIONS

47212 | TAEGU AB KO | 68-70,73-81 | ALL
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE OF WEATHER CONDITIONS FROM HOURLY OBSERVATIONS

MONTH	HOURS (L.S.T.)	THUNDER-STORMS	RAIN AND/OR DRIZZLE	FREEZING RAIN & /OR DRIZZLE	SNOW AND/OR SLEET	HAIL	% OF OBS WITH PRECIP.	FOG	SMOKE AND/OR HAZE	BLOWING SNOW	DUST AND OR SAND	% OF OBS WITH OBST TO VISION	TOTAL NO. OF OBS.
JAN	ALL		2.2		1.8		4.0	12.3	3.9			16.2	6182
FEB		.0	4.6	.0	1.1	.0	5.6	11.8	5.1		.3	17.1	5656
MAR			4.4		.4		4.8	13.1	4.0		1.1	15.3	5466
APR		.0	9.2			.0	9.2	9.8	4.3		2.3	16.4	5455
MAY		.1	8.0				8.0	10.2	5.0		1.2	16.5	5838
JUN		.5	9.2			.0	9.2	16.9	5.5		.0	22.4	5493
JUL		1.1	12.8				12.8	20.5	4.9			25.4	5820
AUG		1.7	9.7				9.7	14.7	4.9			19.7	5704
SEP		.7	10.0				10.0	16.1	2.8			18.9	5453
OCT		.0	4.9				4.9	18.3	3.7		.0	21.9	5418
NOV		.0	4.3		.1		4.4	15.3	4.1			19.3	5451
DEC			2.6	.0	.9		3.5	14.8	4.6		.1	19.5	6203
TOTALS		.3	6.8	.0	.4	.0	7.2	14.2	4.4		.4	19.1	68139

ORIGINAL DATA RECORDED IN SYNOPTIC CODE

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART C SURFACE WINDS

Presented in this part are various tabulations of surface winds as follows:

*1. Extreme Values - Peak Gusts: Derived from daily observations and presented by individual year and month for the entire period of record available. Speeds are presented in knots, while directions are given in 16 compass points from the beginning of record through June 1968, and in tens of degrees starting in July 1968. The extreme is selected and printed from available peak gusts for each year-month, however an asterisk (*) is printed in the data block if less than 90% (3 or more missing observations) of the peak gusts are available for the month. An ALL MONTHS value is presented when every month of the year has valid observations. Means and standard deviations are also computed when four or more values are present for any column. A total raw count of valid observations is presented for each month and ALL MONTHS.

NOTE: According to Federal Meteorological Handbook No. 1 specifications (formerly Circular N), "peak gust data are recorded only at stations with continuous instantaneous wind-speed recorders."

C

*2. Bivariate percentage frequency tabulations: Derived from hourly observations, these tabulations are a percentage frequency of wind directions to 16 compass points and calm by wind speeds (knots) in increments of Beaufort classifications. Percentages are shown by both directions and speed, and in addition the mean wind speed is given for each direction.

A separate category is provided on the form for variable winds, which are reported in some data sources. In these data where light and variable winds are reported with no directions but with speeds given, the speeds will be summarized in the appropriate groups opposite the column headed VRBL.

a. Three tables are prepared for ALL WEATHER surface winds, all years combined, by: (1) Annual - all hours combined, (2) By month - all hours combined, and (3) By month - by standard 3-hour groups.

b. A separate annual table is also presented for surface winds meeting INSTRUMENT CLASS conditions as follows: Ceiling 200 through 1400 feet inclusive with visibility equal to or greater than 1/2 mile, and/or visibility 1/2 through 2-1/2 miles inclusive with ceiling equal to or greater than 200 feet.

NOTE: A percentage frequency of ".0" in these tables represents one or more occurrences amounting to less than ".05" percent.

*Values for means and standard deviations do not include measurements from incomplete months.

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | JAN (MONTH)

ALL WEATHER (CLASS) | 0000-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.7										1.1	4.3
NNE													
NE													
ENE													
E	.4	.9	.3	.1								1.7	5.5
ESE	.9	.4										1.3	3.1
SE	.3	.5										.8	4.0
SSE	.1	.4										.5	4.7
S													
SSW		.3										.3	4.0
SW	.3	.1										.4	3.3
WSW	.1	.7	.4	.3								1.5	6.7
W	1.2	4.4	3.7	1.5								10.8	7.1
WNW	1.5	5.3	6.3	2.9	.3	.1						16.4	7.9
NW	1.2	3.2	3.9	2.0	.3							10.5	7.6
NNW	.8	1.3	.9	.3								3.3	5.6
VARBL	.4	.3										.7	3.6
CALM												50.7	
	7.6	18.5	15.5	7.1	.5	.1						100.0	3.4

TOTAL NUMBER OF OBSERVATIONS 750

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | JAN (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.3	.1									.9	3.6
NNE	.1	.1										.3	3.5
NE	.1	.1										.3	3.5
ENE		.3	.1	.3								.7	9.6
E	.4	.3	.1									.8	4.0
ESE	.3	.4	.1									.8	4.0
SE	.3	.1	.1									.5	4.3
SSE	.3	.1	.1									.5	5.3
S													
SSW													
SW		.3			.1							.4	10.3
WSW		1.0	.4									1.4	6.0
W	.9	4.3	4.0	1.6	.1							10.9	7.3
WNW	3.0	5.1	5.9	1.4	.1							15.5	6.7
NW	1.0	3.4	4.0	.9	.1							9.5	7.2
NNW	1.0	.7	.3	.4								2.3	5.6
VARBL	.7											.7	2.6
CALM												4.6	
	8.6	16.4	15.3	4.6	.5							100.0	3.0

TOTAL NUMBER OF OBSERVATIONS 769

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
JAN — MONTH
ALL WEATHER — CLASS
0600-0800 — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.5										1.2	3.3
NNE	.3											.3	2.0
NE	.3											.3	2.0
ENE	.1			.1								.3	8.0
E	.5	.3	.1	.3								1.2	6.4
ESE	.3	.1	.1	.1								1.2	4.6
SE		.5										.5	4.5
SSE	.1											.1	2.0
S													
SSW	.1	.1										.3	3.5
SW		.1										.1	4.0
WSW	.1	.8	.5	.1								1.6	6.6
W	1.3	2.7	3.8	.9								8.7	6.7
WNW	1.7	4.1	4.9	2.2	.4							13.3	7.7
NW	.9	2.5	3.5	1.4	.3							8.5	7.8
NNW	.8	1.6	1.0	.1								3.5	5.3
VARBL	.6	.1										.8	2.8
CALM												58.3	
	8.3	13.5	14.0	5.3	.6							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 773

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | JAN (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.1										.7	3.2
NNE													
NE													
ENE				.1								.1	14.0
E	.1	.1	.7	.1								1.1	8.0
ESE	.3	.4	.3	.1								1.1	5.6
SE	.3	.4	.1									.8	4.3
SSE		.3	.1									.4	7.0
S	.1											.1	3.0
SSW		.3	.1	.1								.5	7.5
SW	.1	.1	.3									.5	6.0
WSW	.3	.7	1.6	.4								2.9	7.5
W	2.7	3.7	6.4	3.6								16.4	7.8
WNW	1.3	3.3	6.4	3.7	1.1		.1					16.0	9.3
NW	1.6	2.5	4.8	2.1	.1							11.2	7.8
NNW	.7	1.1	.8	.1	.1	.3						3.1	7.8
VARBL	1.2	.4										1.6	2.9
CALM												43.5	
	9.2	13.5	21.6	10.5	1.3	.3	.1					100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 750

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47612 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-81 (YEARS) JAN (MONTH)

ALL WEATHER (CLASS) 1300-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.1										.4	3.3
NNE													
NE													
ENE		.4	.3	.3								.9	8.7
E	.1	.3	.7	.5								1.6	8.8
ESE	.3	.4	.3	.4								1.3	7.6
SE	.1	.3	.5									.9	5.9
SSE	.3	.1	.3	.1								.8	6.3
S			.1									.1	8.0
SSW	.4	.1										.5	3.3
SW	.8	.4	.7									1.9	4.7
WSW	.7	1.6	2.7	.5								5.4	7.2
W	4.3	7.0	9.3	5.4	1.5	.1						27.4	8.3
WNW	1.7	2.8	8.2	8.0	2.4	.3						23.4	10.5
NW	1.1	2.7	3.9	5.7	.9	.8						15.0	10.8
NNW	.3	.4	1.6	.5								2.9	6.2
VARBL	1.6	1.3	.4									3.3	4.1
CALM												14.2	
	11.6	17.9	28.8	21.5	4.8	1.2						100.0	7.7

TOTAL NUMBER OF OBSERVATIONS 753

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | JAN (MONTH)

ALL WEATHER (CLASS) | 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.3	.4									.8	6.0
NNE													
NE		.1										.1	6.0
ENE		.1	.3									.4	7.7
E		.7	.8	.1								1.6	7.8
ESE	.3	.3	.8	.3								1.6	7.8
SE	.3	.4	.3									.9	5.7
SSE		.3										.3	4.5
S		.7										.7	5.0
SSW	.3	.3	.1	.3								.9	6.7
SW	.3	.7	.3	.1								1.3	5.8
WSW	.7	2.0	2.1	.3								5.2	6.3
W	2.1	6.3	7.2	3.6	.7	.1						19.9	8.0
WNW	2.5	6.5	8.4	8.3	.9	.4						27.0	9.2
NW	1.8	3.4	7.0	7.2	.9	.3	.1					20.8	9.9
NNW	.7	1.1	1.2	.7								3.6	7.7
VARBL	1.1	1.3										2.4	3.5
CALM												12.8	
	9.9	24.2	28.9	20.8	2.5	.8	.1					100.0	7.3

TOTAL NUMBER OF OBSERVATIONS 759

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47?12 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | JAN MONTH

ALL WEATHER CLASS | 1800-2000 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.8	.1									1.5	4.0
NNE	.1			.1								.3	7.5
NE	.1											.1	2.[illegible]
ENE	.3	.3										.5	3.0
E		.8	1.0	.6								2.4	8.6
ESE	.1	.3	.1									.5	5.3
SE		.3										.3	5.0
SSE		.4										.4	5.3
S	.1		.3									.4	7.3
SSW													
SW			.3									.3	7.5
WSW		.5	.3	.1								.9	6.4
W	1.1	3.1	3.2	2.2								9.5	7.6
WNW	2.4	8.3	7.6	4.2	.5							23.0	7.4
NW	2.7	3.8	6.1	1.5	.4							14.5	7.4
NNW	1.9	3.4	1.1	1.1								7.6	6.0
VARBL	.4	.1										.5	3.3
CALM												37.3	
	9.9	21.9	20.1	9.9	.9							100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 786

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | JAN (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.8	.1									1.6	3.8
NNE	.1	.1										.3	4.0
NE													
ENE	.1											.1	2.0
E	.4	.8	.1	.1								1.4	5.6
ESE	.3	1.1	.8									2.1	5.8
SE		.4	.1									.5	6.0
SSE	.1	.3	.3									.6	5.4
S		.1	.1									.3	5.5
SSW		.1										.1	6.0
SW		.1	.3									.4	6.0
WSW	.3	.3	.5	.1								1.1	6.2
W	1.3	3.0	2.5	2.1	.3							9.1	7.8
WNW	3.3	5.9	4.8	2.4	.5							16.8	6.9
NW	1.9	4.5	4.0	2.6	.3							13.3	7.5
NNW	1.1	1.5	1.1	.1								3.9	5.5
VARBL	.3											.3	2.5
CALM												48.1	
	9.8	18.9	14.7	7.5	1.0							100.0	3.5

TOTAL NUMBER OF OBSERVATIONS 798

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | JAN MONTH

ALL WEATHER CLASS | ALL HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.4	.1									1.0	3.9
NNE	.1	.0		.0								.1	4.3
NE	.1	.0										.1	3.2
ENE	.1	.1	.1	.1								.4	7.7
E	.2	.5	.5	.2								1.5	7.1
ESE	.4	.4	.3	.1								1.2	5.6
SE	.1	.4	.1									.7	5.0
SSE	.1	.2	.1	.0								.5	5.4
S	.0	.1	.1									.2	5.8
SSW	.1	.1	.0	.0								.3	5.6
SW	.2	.2	.2	.0	.0							.7	5.7
WSW	.3	.9	1.0	.2								2.5	6.7
W	1.8	4.3	5.0	2.6	.3	.0						14.0	7.7
WNW	2.2	5.2	6.5	4.1	.8	.1	.0					18.9	8.3
NW	1.5	3.3	4.6	2.9	.4	.1	.0					12.9	8.5
NNW	.9	1.4	1.0	.4	.0	.0						3.8	6.4
VARBL	.8	.4	.1									1.3	3.4
CALM												40.0	
	9.4	18.1	19.8	10.9	1.5	.3	.0					100.0	4.6

TOTAL NUMBER OF OBSERVATIONS 6138

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | FEB (MONTH)

ALL WEATHER (CLASS) | 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.6		.1								1.5	4.5
NNE	.6	.1										.7	2.8
NE	.1											.1	2.0
ENE	.1	.1										.3	3.0
E	.1	.6	.4	.1								1.3	7.0
ESE	.7	1.5	1.0		.1							3.3	5.8
SE	.1	.6	1.0									1.7	6.5
SSE			.1	.1								.3	10.5
S		.7	.3									1.0	5.4
SSW		.4										.4	4.7
SW													
WSW	.3											.3	1.5
W	.9	2.5	2.6	.9								6.8	6.9
WNW	.6	5.1	3.0	2.0	.4	.1						11.3	8.1
NW	1.9	4.5	3.5	2.6		.6						13.1	8.0
NNW	1.3	1.5	1.2	.4								4.4	5.7
VARBL	.1	.3										.4	3.7
CALM												53.0	
	7.7	18.4	13.2	6.4	.6	.7						100.0	3.3

TOTAL NUMBER OF OBSERVATIONS 689

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | IAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | FEB (MONTH)

ALL WEATHER (CLASS)

0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.0	.1		.1								1.3	3.7
NNE	.1											.1	2.0
NE			.1									.1	8.0
ENE	.3		.3									.6	4.5
E	.3	.3	.4	.1								1.1	6.1
ESE	.7	.6		.6								1.9	6.8
SE	.4	.4	.4									1.3	4.9
SSE		.9	.3									1.1	5.8
S	.4	.3	.1									.9	4.2
SSW													
SW													
WSW		.4	.3									.7	7.0
W	.4	3.3	2.1	.7	.1							6.7	7.1
WNW	2.0	3.3	4.6	1.3	.1							11.3	6.9
NW	2.6	4.4	3.4	2.3	.1							12.9	7.1
NNW	1.6	1.6	1.6	.3								5.0	5.5
VARBL	.1	.1										.3	3.0
CALM												54.6	
	10.0	15.7	13.7	5.4	.4							100.0	2.9

TOTAL NUMBER OF OBSERVATIONS 699

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47-12 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

ALL WEATHER CLASS | 0600-0800 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.[illegible]	.1		.1								1.2	4.0
NNE	.6	.1										.7	2.2
NE	.1	.1	.3									.6	6.5
ENE	.3	.3	.1									.7	4.6
E	.3	1.0	.4	.3								1.9	6.6
ESE	.8	.8										1.7	3.4
SE		.4	.1									.6	5.5
SSE	.1		.7									.8	7.8
S		.1										.1	6.[illegible]
SSW	.3											.3	2.0
SW	.1											.1	2.[illegible]
WSW	.1	.1										.3	3.5
W	1.[illegible]	3.3	2.5	.6	.4							7.8	7.[illegible]
WNW	2.2	3.6	3.1	1.0								9.9	6.3
NW	2.9	3.7	2.5	1.8								11.0	6.4
NNW	1.5	1.5	1.0	.6	.1							4.7	6.1
VARBL	.3											.3	2.[illegible]
CALM												57.4	
	11.7	15.4	10.7	4.3	.6							100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 72.

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 69-73,74-81 (YEARS) | FEB (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4											.4	2.0
NNE	.1	.3										.4	4.0
NE	.3	.1										.4	2.3
ENE		.1	.4									.6	6.5
E	.7	1.0	.9	.1								2.7	5.9
ESE	.3	1.6	.4									2.3	5.3
SE	.6	.3	.1									1.0	4.3
SSE	.3	.6	.4									1.3	5.0
S		.1										.1	6.0
SSW	.1											.1	3.0
SW			.1									.1	10.0
WSW	.7	.7	1.0									2.4	5.7
W	3.6	4.6	5.3	1.9	.6							15.9	7.2
WNW	3.3	3.2	5.7	5.9	.6							18.7	8.5
NW	1.3	1.9	4.2	3.0								10.3	8.5
NNW	1.1	1.1	1.6	.6	.1	.1						4.7	7.3
VARBL	.6	.6										1.1	3.3
CALM												37.1	
	13.5	16.2	20.3	11.5	1.3	.1						100.0	4.6

TOTAL NUMBER OF OBSERVATIONS 696

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47.12 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

ALL WEATHER CLASS | 1200-1400 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.3			.3							.7	10.2
NNE			.3	.1								.4	10.7
NE													
ENE	.1	.3	.7									1.2	7.1
E	.1	1.0	.9	.1								2.2	6.7
ESE	.1	1.2	1.5	.3								3.1	7.3
SE		1.2	.7	.3								2.2	7.0
SSE	.1	.9	.7									1.7	6.2
S		.1	.3									.4	7.7
SSW	.1	.7										.9	4.2
SW	.3		.3									.6	5.0
WSW	.7	1.9	1.2	.4								4.2	6.4
W	3.4	6.1	7.9	3.9	.9							22.2	7.8
WNW	2.2	4.4	7.6	6.9	1.3	1.0	.1					23.5	10.2
NW	1.9	3.5	5.2	5.0	.9	.1						16.6	9.3
NNW	.3	.9	2.0	1.3	.3							4.8	9.6
VARBL	.6	.6	.1									1.3	4.2
CALM												14.0	
	10.2	23.0	29.4	18.4	3.6	1.2	.1					100.0	7.4

TOTAL NUMBER OF OBSERVATIONS 686

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | FEB (MONTH)

ALL WEATHER (CLASS) | 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N			.1	.3								.4	12.3
NNE				.1								.1	11.0
NE													
ENE	.1	.1	.4	.6								1.3	9.6
E	.3	.3	.9	.6								2.0	8.2
ESE	.4	.4	2.1	.7								3.7	8.1
SE	.9	1.0	.7	.4								3.0	5.9
SSE	.1	.6	.9									1.6	6.4
S		.4	.4	.1								1.0	7.6
SSW	.3	.4	.3									1.0	4.9
SW	.1	.6	.3									1.0	6.0
WSW	1.1	1.3	.7	.1								3.3	5.3
W	2.0	4.4	4.4	2.4	1.1							14.4	8.3
WNW	2.0	3.7	9.3	6.3	1.4	.4	.1					23.3	9.9
NW	2.0	4.0	7.2	8.0	.7	.3						22.2	9.5
NNW	1.0	2.6	3.0	2.3	.6							9.4	6.8
VARBL	.3	.6										.9	3.8
CALM												11.3	
	10.7	20.5	30.8	22.0	3.9	.7	.1					100.0	7.8

TOTAL NUMBER OF OBSERVATIONS 699

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

ALL WEATHER CLASS | 1800-2000 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.3	.1	.1								.8	6.0
NNE	.1	.1										.3	3.0
NE	.2											.3	2.0
ENE	.4	.3	1.0	.3								1.9	7.4
E	.4	1.8	1.5	.7								4.4	7.4
ESE	1.8	1.9	1.1	.3								5.1	5.1
SE	.6	.7	1.0	.3								2.5	6.4
SSE		.3	.6	.1								1.0	7.9
S	.3	.6										.8	4.3
SSW	.1	.3	.1									.6	5.3
SW	.4											.4	2.5
WSW		.3	.3	.1								.7	7.2
W	.4	1.5	1.9	1.2	.3							5.4	8.6
WNW	2.3	3.9	5.0	3.3	.3	.1						14.9	8.2
NW	1.8	6.4	8.0	2.6	.7							19.5	7.8
NNW	2.2	3.6	5.4	.4	.1							11.7	6.4
VARBL	.1											.1	3.0
CALM												29.6	
	11.6	21.8	26.0	9.5	1.4	.1						100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 724

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 | TAEGU AB KO | 69-70,74-81 | FEB
STATION | STATION NAME | YEARS | MONTH

ALL WEATHER
CLASS

2100-2300
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.3	.1	.1								1.2	4.6
NNE	.6	.4	.1									1.1	3.3
NE	.1	.1		.1								.4	6.3
ENE	.3		.3	.1								.7	7.2
E	.4	1.0	.8	.4								2.6	6.9
ESE	.6	1.5	1.0	.1								3.2	6.1
SE	.8	1.0	.6	.4								2.8	6.0
SSE		.6	.4	.1								1.1	7.5
S	.1	.7										.8	4.2
SSW		.1										.1	4.0
SW	.1											.1	2.0
WSW		.4										.4	4.7
W	.1	1.2	1.5	.8								3.7	7.9
WNW	1.2	4.8	5.0	1.9	.4							13.4	7.6
NW	2.2	5.8	5.0	2.3	.3	.1						15.7	7.3
NNW	1.1	2.5	1.8	.7								6.1	6.2
VARBL		.3										.3	4.5
CALM												46.1	
	8.4	20.7	16.6	7.3	.7	.1						100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 724

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 69-73,74-81 (YEARS) FEB (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.2	.1	.1	.0							1.[illegible]	5.3
NNE	.3	.1	.1	.0								.5	4.1
NE	.1	.1	.1	.0								.2	4.6
ENE	.2	.2	.4	.1								.9	7.0
E	.3	.9	.8	.3								2.3	6.9
ESE	.7	1.2	.9	.2	.[illegible]							3.0	6.1
SE	.4	.7	.6	.2								1.9	6.[illegible]
SSE	.1	.5	.5	.1								1.1	6.6
S	.1	.4	.1	.0								.7	5.5
SSW	.1	.2	.1									.4	4.4
SW	.1	.1	.1									.3	4.8
WSW	.4	.6	.4	.1								1.5	5.8
W	1.5	3.4	3.5	1.5	.4							10.3	7.7
WNW	2.0	4.[illegible]	5.4	3.5	.6	.2	.0					15.7	8.6
NW	2.1	4.3	4.9	3.4	.3	.1						15.2	8.1
NNW	1.3	1.9	2.2	.8	.2	.[illegible]						6.4	7.[illegible]
VARBL	.3	.3	.0									.6	3.6
CALM												38.0	
	10.5	19.0	20.0	10.6	1.5	.4	.2					1[illegible].0	4.7

TOTAL NUMBER OF OBSERVATIONS 5637

USAFETAC FORM 0-8-5 (OL-A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 60-70,74-81 (YEARS) | MAR (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.9										1.8	3.2
NNE	.1											.1	3.0
NE	.1											.1	3.0
ENE	.7		.3									1.0	4.1
E	1.6	1.8	1.2									4.6	4.9
ESE	1.2	1.9	1.3									4.5	5.0
SE	.4	1.3	.7	.1								2.7	5.9
SSE	.3	.3										.6	3.3
S	.1	.1										.3	4.5
SSW	.1			.1								.3	8.0
SW				.1								.1	14.0
WSW		.1										.1	4.0
W	1.3	1.8	1.3	.7	.4							5.7	7.7
WNW	2.8	3.4	3.7	3.3								13.3	7.7
NW	.9	2.8	3.1	2.1	.6							9.6	8.4
NNW	1.0	1.3	1.2	.3								3.9	6.0
VARBL	.1	.3										.4	3.3
CALM												5.5	
	12.1	16.3	13.0	6.9	1.0							100.0	3.3

TOTAL NUMBER OF OBSERVATIONS 667

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47512 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | MAR (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.4		.1								1.0	4.7
NNE	.1											.1	2.0
NE	.3	.1										.4	3.0
ENE	.4	.1										.6	2.8
E	1.5	2.2	.9	.3								4.9	5.3
ESE	1.3	.9	.3	.3								2.8	5.2
SE	.1	.3	.7									1.2	7.0
SSE	.3	.6	.1									1.0	4.7
S	.1											.1	3.0
SSW		.1										.1	6.0
SW		.3										.3	5.0
WSW													
W	.4	3.0	1.5	.7	.3							5.9	7.4
WNW	1.2	3.6	4.0	1.6	.1							10.5	7.8
NW	1.0	2.5	3.9	2.1	.3							9.8	8.4
NNW	.7	1.0	1.2	.3								3.3	6.4
VARBL	.4											.4	2.3
CALM												57.3	
	8.6	15.3	12.6	5.5	.7							100.0	2.9

TOTAL NUMBER OF OBSERVATIONS 675

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 STATION | TAEGU AB KO STATION NAME | 69-70, 74-81 YEARS | MAY MONTH

ALL WEATHER CLASS | 0600-0800 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.1										.9	3.0
NNE		.3										.3	4.5
NE	.3											.3	3.0
ENE	.1	.1	.1									.4	5.0
E	1.0	.7	1.5	.3								3.5	6.2
ESE	1.9	.3	.1	.6	.1							3.1	5.3
SE	.1	.9	.1									1.2	4.6
SSE	.4	.1										.6	3.3
S			.1									.1	10.0
SSW		.1										.1	6.0
SW													
WSW			.1	.3								.4	11.3
W	.4	2.9	2.0	.7								6.1	7.0
WNW	1.0	3.1	4.1	3.4	.4							12.0	8.7
NW	1.0	1.5	1.6	1.5	.1	.1						5.8	8.4
NNW	.9	1.0	.6	.3								2.8	5.8
VARBL	.1											.1	3.0
CALM												62.2	
	8.2	11.2	10.5	7.0	.7	.1						100.0	2.7

TOTAL NUMBER OF OBSERVATIONS 686

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | IAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | MAY (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.3	.3		.3							1.4	8.1
NNE													
NE		.3	.2									.5	5.7
ENE	.2	.2	1.4	.2								1.8	7.9
E	.3	.5	1.5	.6								2.9	8.0
ESE	.2	.8	1.1	.8								2.7	8.3
SE	1.1	1.1	1.2	.5								3.8	6.1
SSE	.3	.3	.2									.8	3.8
S	.3	.3										.6	3.3
SSW		.2										.2	5.0
SW													
WSW	1.2	2.1	.5	.3								3.9	5.0
W	1.8	6.5	5.3	2.0	.5	.2						16.2	7.2
WNW	1.5	3.9	4.4	6.4	.6	.2						17.0	9.5
NW	1.8	1.5	1.8	3.5	1.1							9.7	10.1
NNW	.6	.6	1.2	1.2	.2							3.8	9.0
VARBL	1.1	.3										1.4	2.8
CALM												33.4	
	10.8	18.7	19.0	15.3	2.6	.3						100.0	5.4

TOTAL NUMBER OF OBSERVATIONS 659

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | MAR MONTH

ALL WEATHER CLASS | 1200-1400 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.3	.2	.2								.9	5.7
NNE													
NE	.2		.2	.5								.8	10.2
ENE	.3	.3	1.2									1.8	6.9
E	.3	.8	2.1	.8								3.9	8.4
ESE	.3	1.4	2.9	1.2	.2							5.9	8.7
SE	.3	.5	1.7	.8								3.2	8.1
SSE	.3	.6	.9									1.8	5.8
S	.3			.2								.5	5.0
SSW	.8	.6	.2	.3								1.8	5.3
SW	.2	.3	.2									.6	5.8
WSW	.5	1.7	1.8	.3								4.2	6.4
W	2.6	6.7	6.6	3.5	.5		.2					19.3	8.0
WNW	2.0	4.7	6.2	5.4	1.4	.6	.3	.2				20.6	10.2
NW	.6	3.6	2.9	4.8	1.1	.2	.2					13.3	10.5
NNW	1.4	1.1	.9	1.4	.6	.2						5.4	9.2
VARBL	1.1	1.4										2.4	3.7
CALM												13.7	
	11.1	23.0	27.7	19.1	3.6	.9	.6	.2				100.0	7.5

TOTAL NUMBER OF OBSERVATIONS 664

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) IAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS) 15.0-17.0 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N		.6	.1	.4								1.2	5.3
NNE	.1											.1	3.0
NE													
ENE	.1	.6	1.3									2.1	7.4
E	.4	1.0	4.9	1.2								7.5	8.5
ESE	.4	1.0	2.1	1.6	.1	.1						5.3	9.1
SE	.1	.9	1.5	.4								2.9	7.7
SSE	.6	.6		.1								1.3	4.8
S	.1	.6	.3	.3								1.3	7.0
SSW	.3	.1	.1	.3								.9	7.3
SW	.1	.1	.6									.9	6.7
WSW	.6	1.3	1.2	.4								3.5	6.9
W	2.1	7.1	4.6	1.9	.6	.4						16.6	7.6
WNW	1.6	5.3	5.1	6.6	1.2	.4						20.3	9.7
NW	1.6	3.1	5.1	6.9	1.6	.3						18.7	10.4
NNW	.9	2.4	1.3	1.5	.6	.3						6.9	9.1
VARBL	.6	1.2										1.8	3.8
CALM												7.6	
	9.9	26.8	28.2	21.8	4.1	1.6						100.0	6.1

TOTAL NUMBER OF OBSERVATIONS 680

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 | TAEGU AB KO | 69-70,74-79,81 | MAR

STATION | STATION NAME | YEARS | MONTH

ALL WEATHER
CLASS

1800-2000
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	.9	.3	.3								2.9	4.8
NNE	.4	.1										.6	3.5
NE		.1	.1									.3	6.0
ENE	.3	.6	1.7	.1								2.8	7.2
E	1.2	2.8	5.5	1.5								10.9	7.4
ESE	.7	2.5	2.2	.6	.4							6.4	7.5
SE	.1	.6	1.0	.3								2.0	7.6
SSE	.6	.7	.1									1.5	4.3
S		.6	.1									.7	5.8
SSW	.3	.3		.3								.9	6.5
SW	.1	.3	.1									.6	5.8
WSW	.1	.3		.1								.6	5.8
W	1.6	2.3	1.2	1.0								6.1	6.4
WNW	2.9	4.4	5.4	3.2	1.2	.3						17.3	8.5
NW	2.5	3.5	4.7	3.4	1.0	.1						15.2	8.5
NNW	1.7	3.8	1.6	1.5	.3							8.9	6.6
VARBL	.7	.1										.9	2.3
CALM												21.4	
	14.9	23.9	24.2	12.2	2.9	.4						100.0	5.8

TOTAL NUMBER OF OBSERVATIONS 686

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) MAR (MONTH)

ALL WEATHER (CLASS)

2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	.6	.6									2.4	4.5
NNE	.3	.3	.1									.7	4.3
NE	.4											.4	2.0
ENE	.4	.4	.4									1.3	5.7
E	1.3	3.8	3.5	.4								9.0	6.1
ESE	1.7	2.5	2.1	.4	.1							6.9	6.2
SE	.8	1.1	1.6	.3								3.8	6.3
SSE	.4	.7	.1									1.3	4.2
S	.3	.1										.4	3.0
SSW	.1		.1									.3	5.5
SW			.1									.1	7.5
WSW		.1	.3									.4	7.7
W	.7	.8	1.3	.7								3.5	7.6
WNW	1.1	3.8	4.4	2.7		.1						12.1	8.1
NW	1.3	2.7	4.2	2.7	.1							11.0	8.2
NNW	1.4	1.3	.7	.7	.1							4.0	6.6
VARBL	.6	.3										.3	3.2
CALM												41.4	
	12.1	18.4	19.6	7.9	.4	.1						100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 708

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | MAR (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.5	.2	.1	.0							1.6	5.1
NNE	.1	.1	.0									.3	3.6
NE	.2	.1	.1	.1								.4	5.5
ENE	.3	.3	.8	.0								1.5	6.6
E	1.0	1.7	2.7	.6								6.0	6.9
ESE	1.0	1.5	1.5	.7	.1	.0						4.9	7.1
SE	.4	.8	1.1	.3								2.6	6.8
SSE	.4	.5	.2	.0								1.1	4.5
S	.2	.2	.1	.1								.5	5.4
SSW	.2	.2	.1	.1								.6	6.1
SW	.1	.1	.1	.0								.3	6.5
WSW	.3	.7	.5	.2								1.6	6.3
W	1.4	3.8	2.9	1.4	.3	.1	.0					9.9	7.5
WNW	1.8	4.0	4.7	4.1	.6	.2	.0	.0				15.4	8.9
NW	1.3	2.7	3.4	3.4	.7	.1	.0					11.6	9.3
NNW	1.1	1.5	1.1	.9	.2	.1						4.9	7.5
VARBL	.6	.4										1.0	3.3
CALM												36.0	
	11.0	19.2	19.4	11.9	2.0	.4	.1	.0				100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 5425

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47612 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) APR (MONTH)

ALL WEATHER (CLASS)

0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	.3	.6									2.0	4.5
NNE	.3											.3	2.0
NE	.2	.2										.3	3.0
ENE	1.1	.5										1.6	3.1
E	.8	3.9	2.0	.3	.2							7.2	6.4
ESE	1.6	3.0	1.9	.8	.3							7.5	6.7
SE	1.3	2.9	1.7	1.1								6.9	6.5
SSE	.8	1.1	.8	.5								3.1	6.4
S	.3	.6	.5									1.4	3.9
SSW			.5									.5	9.0
SW	.5	.2	.2									.8	3.6
WSW	.3											.3	1.5
W	2.0	1.9	2.5	.2	.5							7.0	6.8
WNW	1.4	2.0	1.6	1.4	.5							6.9	7.7
NW	1.7	2.5	1.1	.8								6.1	6.0
NNW	1.9	1.6		.2								3.6	4.1
VARBL	.6	.3										.9	3.3
CALM												43.5	
	15.8	20.8	13.3	5.2	1.4							100.0	3.5

TOTAL NUMBER OF OBSERVATIONS 639

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | APR (MONTH)

ALL WEATHER (CLASS)

0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	1.3	.1									1.8	4.6
NNE	.6	.3										.9	2.8
NE	.3	.1										.4	2.7
ENE	.3	.6										.9	4.2
E	1.0	4.0	1.6	.1								6.8	5.5
ESE	.9	2.2	1.5	.1								4.7	5.6
SE	1.3	1.3	1.2	.4	.1							4.4	6.3
SSE	.4	1.2	.4	.9								3.0	7.5
S	.1	.3	.4	.3								1.2	7.4
SSW	.3											.3	2.5
SW	.1	.4										.6	3.5
WSW	.1	.1										.3	4.5
W	.7	1.3	1.3	.4								3.9	6.4
WNW	1.3	2.8	.7	1.0	.3							6.2	7.2
NW	.7	1.8	1.5	.9								4.9	7.2
NNW	1.3	1.2	.1	.1								2.8	4.4
VARBL	1.0	.3										1.3	2.7
CALM												55.6	
	11.1	19.4	9.0	4.4	.4							100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 675

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 1600-1800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.7	.3									1.8	3.9
NNE	.7											.7	2.3
NE	.1		.1									.3	4.5
ENE	.7	.6	.4									1.8	4.4
E	1.3	1.6	1.6									4.6	5.5
ESE	1.7	1.3	1.5	.4								4.3	6.3
SE	.9	1.9	.4	1.9	.1							5.3	8.0
SSE	.7	.9	.4	.9								2.9	7.1
S	.3	.3	.1	.1								.9	6.8
SSW	.1	.1		.1								.4	7.3
SW	.3											.3	2.5
WSW	.4		.3	.1								.9	5.5
W	1.2	1.5	1.0	.3								4.0	5.9
WNW	1.0	1.2	1.2	.9								4.3	7.0
NW	.9	1.0	.1	.4								2.5	5.5
NNW	.7	1.6	.1									2.5	3.8
VARBL	1.1	.7										1.8	3.5
CALM												60.8	
	12.4	13.5	7.8	5.3	.1							100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 679

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | APR (MONTH)

ALL WEATHER (CLASS)

0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.4	.1									1.2	4.0
NNE	.1		.1									.3	6.3
NE	.3	.1		.1								.6	5.5
ENE	.1	.1	.4	.3								1.0	6.4
E	.9	1.6	3.1	1.8	.1							7.5	6.5
ESE	1.8	1.5	2.2	1.5	.1							7.0	7.2
SE	.4	1.3	2.8	1.9	.4							6.9	9.4
SSE	1.2	.7	1.3	.9	.1							4.2	7.8
S	.7	.6	.4	.3								2.0	6.1
SSW	.7	.1										.9	2.7
SW	.1	.3	.3									.7	5.8
WSW	.9	.9	1.3	.1								3.2	6.0
W	2.8	4.7	2.6	1.3								11.4	6.3
WNW	3.2	4.1	2.8	2.3	.9							13.3	7.3
NW	1.8	2.0	1.5	.4	.3	.1						6.1	6.8
NNW	.9	1.2	.3	.1	.3							2.8	6.5
VARBL	1.9	1.8										3.7	3.6
CALM												27.3	
	18.3	21.5	19.3	11.1	2.3	.1						100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 684

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 | TAEGU AB KO | 69-70,74-79,81 | APR
STATION | STATION NAME | YEARS | MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.3	.1									.7	4.4
NNE		.1	.1									.3	7.[illegible]
NE		.1	.4									.6	7.3
ENE		.4	1.0									1.5	6.[illegible]
E	.3	1.3	4.6	1.9								8.1	9.0
ESE	.4	1.9	2.8	2.2	.3							7.6	9.3
SE		1.5	1.9	1.9	.4							5.7	10.3
SSE	.9	2.8	1.8	1.0	.1	.3						6.9	7.7
S	.9	.6	.3	.1								1.9	5.3
SSW	.7	.6	.4	.3	.1							2.2	7.1
SW	.1	.1	.6	.4								1.3	8.7
WSW	.7	1.9	1.5	1.0	.1							5.3	7.4
W	2.2	5.1	6.0	3.4	.4							17.2	7.8
WNW	2.3	4.1	3.7	2.3	1.2							13.7	8.0
NW	1.5	1.9	1.8	1.9	.6	.3						7.9	9.3
NNW	.6	1.6	1.0	.1	.3							3.7	7.2
VARBL	1.3	2.9										4.3	4.0
CALM												11.2	
	12.3	27.5	28.0	16.7	3.7	.6						100.0	7.1

TOTAL NUMBER OF OBSERVATIONS 681

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 | TAEGU AB KO | 69-70,74-79,81 | APR

STATION | STATION NAME | YEARS | MONTH

ALL WEATHER
CLASS

1500-1700
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.6	.1									.9	4.8
NNE		.3										.3	4.7
NE	.3	.3	.1									.7	5.0
ENE	.1	1.3	1.5	.7								3.7	7.6
E	.9	1.5	4.6	2.1	.1							9.1	8.5
ESE	.4	1.9	3.4	3.2	.4							9.4	9.7
SE	.9	1.6	2.5	1.0	.3							6.3	8.2
SSE		1.8	.9	1.0	.4							4.1	9.5
S	.9	.9	1.5	1.3								4.6	7.7
SSW	.4	.6	.7	.4								2.2	7.6
SW	.4	.9	1.8	.4								3.5	7.7
WSW	1.0	2.2	1.2	1.0		.1						5.6	7.2
W	1.3	4.6	2.7	1.9	1.2							11.6	8.1
WNW	2.1	2.4	5.7	3.1	1.9	.3						15.5	9.7
NW	1.2	1.9	3.4	1.8	.4							8.7	8.5
NNW	.1	.9	.7	.6	.3	.1						2.8	10.1
VARBL	.9	1.2										2.1	4.0
CALM												8.8	
	11.2	24.7	30.8	18.7	5.2	.6						100.0	7.7

TOTAL NUMBER OF OBSERVATIONS 679

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.4	.1									.9	4.7
NNE	.4	.1										.5	2.5
NE		.3	.1									.4	5.7
ENE	.3	.4	2.6	.6								3.9	8.5
E	1.3	4.1	5.6	2.0								13.0	7.6
ESE	1.7	1.7	4.4	2.6		.1						9.8	8.8
SE	.3	2.3	1.7	1.0								5.3	7.5
SSE	.6	.9	1.3	1.0								3.7	8.3
S	1.0	2.1	2.7	.7								6.6	6.9
SSW	.7	1.1	.9									2.7	5.6
SW	.4	.7	.3	.1								1.6	5.4
WSW	.6	1.1		.1								1.7	4.8
W	1.9	1.4	2.7	1.3	.1	.3						7.7	7.7
WNW	1.6	4.0	2.4	2.9	.4							11.3	8.2
NW	1.1	3.3	3.1	.7	.3							8.6	7.0
NNW	1.4	1.7	1.4	.7								5.3	6.2
VARBL	.7	.7										1.4	3.4
CALM												15.7	
	13.6	26.4	29.4	13.7	.9	.4						100.0	6.2

TOTAL NUMBER OF OBSERVATIONS 701

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) TAEGU AB KO (STATION NAME) 69-73,74-79,81 (YEARS) APR (MONTH)

ALL WEATHER (CLASS) 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.6	.6	.3	.1								2.7	4.0
NNE	.1											.1	2.5
NE	.1	.6	.1									.9	4.8
ENE	.4	.7	1.8									3.0	6.7
E	1.9	4.0	2.8	1.5	.1							10.4	6.7
ESE	.9	2.7	3.3	1.8	.1	.3						9.0	8.6
SE	1.8	3.7	3.0	.7								9.2	6.4
SSE	.4	1.0	1.8	1.0								4.3	8.0
S	.4	1.2	1.2	.3								3.1	6.1
SSW	.3	1.2	.1									1.6	4.2
SW	.1		.1									.3	4.0
WSW		.4	.3									.7	6.4
W	.6	2.4	2.2	.6	.1							5.9	7.0
WNW	1.6	1.2	3.1	.9								6.8	7.1
NW	3.1	2.5	1.8	.7								8.1	5.4
NNW	1.6	1.5	.9		.1							4.1	5.1
VARBL	.7	.9										1.6	3.7
CALM												28.1	
	16.0	24.6	22.8	7.7	.6	.3						100.0	4.7

TOTAL NUMBER OF OBSERVATIONS 676

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | APR (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.6	.2	.0								1.5	4.3
NNE	.3	.1	.0									.4	3.2
NE	.2	.2	.1	.0								.5	5.0
ENE	.4	.6	1.0	.2								2.2	6.9
E	1.1	2.8	3.3	1.2	.1							8.3	7.4
ESE	1.0	2.0	2.6	1.6	.2	.1						7.4	8.1
SE	.8	2.1	1.9	1.3	.2							6.2	7.8
SSE	.6	1.3	1.1	.9	.1	.0						4.0	7.9
S	.6	.8	.9	.4								2.7	6.7
SSW	.4	.5	.3	.1	.0							1.4	6.0
SW	.3	.3	.4	.1								1.1	6.4
WSW	.5	.8	.6	.3	.0	.0						2.3	6.6
W	1.6	2.9	2.6	1.2	.3	.0						8.6	7.2
WNW	1.8	2.7	2.7	1.9	.6	.0						9.8	8.0
NW	1.5	2.1	1.8	1.0	.2	.1						6.6	7.2
NNW	1.1	1.4	.6	.2	.1	.0						3.5	5.9
VARBL	1.0	1.1										2.1	3.6
CALM												31.2	
	13.8	22.3	20.2	10.4	1.8	.3						100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 5414

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212	TAEGU AB KO	69-70,74-79,81	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0000-0200
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.1	.3									1.3	3.6
NNE	.1	.3										.4	3.7
NE	.1	.3										.4	4.3
ENE	.6	.6										1.2	3.8
E	1.8	2.2	1.5	.1								5.6	5.0
ESE	1.6	2.6	1.2									5.4	5.2
SE	.9	3.4	1.3	.3								5.9	5.7
SSE	1.3	1.8	2.1	.4								5.6	6.2
S	.6	1.0	.4									2.1	4.7
SSW													
SW	.4	.1										.6	2.8
WSW	.1	.1	.1									.4	5.7
W	.9	2.1	.6	.3								3.8	5.9
WNW	.9	1.6	2.1	.9								5.4	6.9
NW	.9	2.2	.3	.3								3.7	4.8
NNW	.7	.3	.3									1.3	4.4
VARBL	.4	.3										.7	3.2
CALM												56.2	
	12.3	19.1	10.1	2.3								100.0	2.4

TOTAL NUMBER OF OBSERVATIONS 682

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | MAY (MONTH)

ALL WEATHER (CLASS)

0300-0600 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.4										1.1	3.3
NNE													
NE	.3	.1	.1									.6	3.8
ENE	.4	.4										.8	3.8
E	1.5	1.9	.7									4.2	4.5
ESE	1.9	2.8	.6	.3								5.6	4.7
SE	1.1	2.5	1.0	.3								4.9	5.5
SSE	1.0	.8	.3	.4								2.5	5.6
S		.7	.4	.1								1.3	6.8
SSW	.1	.1										.3	3.0
SW	.1		.1									.3	5.0
WSW	.3	.1										.4	3.7
W	1.3	1.1	.7	.1								3.2	5.0
WNW	1.0	1.4	.3	.4								3.1	5.6
NW	.4	1.3	.3									1.9	4.0
NNW	1.3	1.3	.1									2.6	3.5
VARBL	.7											.7	2.0
CALM												66.6	
	12.1	15.0	4.6	1.7								100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 718

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212	TAEGU AB KO	69-70,74-79,81	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0630-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.4										1.1	2.8
NNE	.3		.1									.4	4.7
NE	.3	.3		.1								.7	5.2
ENE	.5	.5	.1	.1								1.4	4.8
E	1.2	1.5	.8	.1								3.7	5.1
ESE	1.9	2.7	1.2									5.9	4.9
SE	1.8	1.8	1.5									4.2	5.1
SSE	.9	2.3	1.1	.3								4.5	5.5
S	.3	.1	.1	.1								.7	6.0
SSW	.1											.1	3.0
SW	.1											.1	1.0
WSW	.4	.4										.8	3.5
W	.4	1.2	.8	.3								2.7	6.2
WNW	1.6	2.2	.7									4.5	4.7
NW	.7	.8	.3									1.8	4.2
NNW	1.1	.5	.1									1.8	3.2
VARBL	.3	.1										.4	3.0
CALM												65.2	
	12.6	14.2	7.0	1.1								100.0	1.7

TOTAL NUMBER OF OBSERVATIONS 732

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212	TAEGU AB KO	69-70,74-79,81	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0900-1100
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.1										.6	3.3
NNE	.6											.6	2.0
NE		.1	.1									.3	6.0
ENE	.1	.3	.1									.6	5.0
E		1.3	2.2	.8								4.7	8.2
ESE	.8	2.5	3.6	1.0								7.9	7.3
SE	1.7	1.5	2.4	1.8	.1							7.5	7.5
SSE	.6	1.0	1.0	.3								2.8	7.0
S	.6	1.0	.8									2.4	5.5
SSW	.4	.1										.6	3.0
SW	.4		.1									.6	4.0
WSW	1.1	1.3	.7	.4								3.5	6.0
W	4.2	5.8	3.6	1.0								14.6	5.6
WNW	3.5	4.3	4.7	.8								13.4	5.7
NW	1.8	2.9	1.9	.4								7.1	5.5
NNW	1.0	.8	.4									2.2	4.3
VARBL	1.4	.6										1.9	3.4
CALM												28.9	
	18.5	24.1	21.8	6.5	.1							100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 719

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212	TAEGU AB KO	69-70,74-79,81	MAY
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

1200-1400
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.4	.1									1.2	3.6
NNE	.1	.1										.3	3.5
NE			.1	.1								.3	12.3
ENE	.3	.4	.4	.1								1.2	6.3
E	.6	1.9	2.3	1.9								6.7	8.5
ESE	.6	2.5	3.2	2.1								8.3	8.5
SE	1.1	2.3	1.3	1.7	.1							6.2	7.7
SSE	1.8	1.4	2.1	.1								5.4	5.7
S	.7	.7	1.8	.1								3.3	6.6
SSW	.7	.3	.6	.1								1.7	5.9
SW	.4	.1	.1	.4								1.1	7.4
WSW	1.8	1.9	.7	.8	.1							5.4	6.3
W	3.3	5.4	3.9	1.4								13.9	6.0
WNW	2.5	5.1	6.3	2.5	.4	.1						16.9	7.4
NW	2.1	3.7	3.9	1.5	.1							11.3	7.0
NNW	.8	1.5	.1	.1								2.6	5.0
VARBL	1.7	1.5	.1									3.3	3.6
CALM												11.0	
	19.0	29.3	26.7	13.1	.8	.1						100.0	6.1

TOTAL NUMBER OF OBSERVATIONS 727

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 69-73,74-79,81 (YEARS) | MAY (MONTH)

ALL WEATHER (CLASS) | 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.6	.1									1.[illegible]	4.7
NNE	.1	.3	.3									.7	6.[illegible]
NE				.1								.1	14.[illegible]
ENE	.1	.4	.8	.1								1.5	7.5
E	1.[illegible]	2.9	4.0	1.5								9.4	7.9
ESE	.4	2.6	3.7	2.1	.1							9.[illegible]	8.5
SE	.3	2.8	2.8	1.0	.1							6.9	7.9
SSE	.6	1.7	.7	.1								3.[illegible]	5.6
S	1.[illegible]	2.2	1.9	.3								5.4	6.3
SSW	.4	.1	.7	.3								1.5	7.4
SW	.4	.4	.3	.1								1.2	5.2
WSW	1.8	1.1	.7	.3	.1							4.[illegible]	5.4
W	2.5	5.1	2.9	1.1	.6							12.1	6.[illegible]
WNW	1.1	7.[illegible]	5.6	4.0	.1	.1						18.[illegible]	7.9
NW	1.4	3.4	3.2	1.8	.1							9.9	7.2
NNW	.7	2.1	1.2	.8								4.8	6.8
VARBL	1.2	1.5										2.8	3.6
CALM												8.7	
	13.2	34.2	28.9	13.6	1.2	.1						100.0	6.5

TOTAL NUMBER OF OBSERVATIONS 726

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | MAY (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.9	.1	.1								1.7	4.8
NNE	.3	.1										.4	3.3
NE	.3	.3	.4	.3								1.2	6.4
ENE	.7	1.3	1.1									3.0	5.8
E	1.5	4.8	5.6	1.1								12.8	7.0
ESE	1.2	3.8	4.4	.9								10.3	6.8
SE	.9	2.3	2.2	.4								5.6	6.8
SSE	.8	2.2	1.7	.4								5.2	6.3
S	1.1	3.4	1.6									6.1	5.5
SSW	.3	.7	.4									1.3	5.6
SW	.1	.4	.1									.7	5.3
WSW	.7	.5		.1								1.3	4.7
W	1.7	1.9	1.9	.8	.3							6.5	7.0
WNW	1.9	4.4	4.0	1.3								11.5	6.8
NW	1.3	3.4	2.1	1.1								7.9	6.3
NNW	1.7	2.4	.7	.4								5.2	5.2
VARBL	.7	.1										.8	2.7
CALM												18.5	
	15.5	32.7	26.2	6.9	.3							100.0	5.2

TOTAL NUMBER OF OBSERVATIONS 756

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47612 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | MAY (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.3	.3									1.6	4.2
NNE	.3											.3	1.0
NE	.1	.3	.1									.5	4.8
ENE	.5	.9	.1									1.6	4.5
E	1.9	3.9	2.9	.1	.1							8.9	6.0
ESE	1.7	3.7	2.5	1.1								9.0	6.3
SE	1.3	3.5	2.7	.3								7.7	5.9
SSE	1.7	3.1	1.2	.5	.3							6.8	6.2
S	.5	.7	.5									1.7	5.2
SSW	.3											.3	2.3
SW	.3	.1	.1									.5	4.6
WSW	.3	.1	.4									.8	6.3
W	1.2	.9	2.1	.4								4.6	6.7
WNW	.9	1.7	2.3	.5								5.4	6.9
NW	1.5	1.6	1.2									4.2	5.3
NNW	1.1	1.2	.1	.1								2.5	4.4
VARBL	.8	.3										1.1	3.1
CALM												42.4	
	15.1	22.4	16.6	3.1	.4							100.0	3.4

TOTAL NUMBER OF OBSERVATIONS 753

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAY — MONTH
ALL WEATHER — CLASS
ALL — HOURS (L.S.T.)
CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥ 56	%	MEAN WIND SPEED
N	.6	.4	.1	.0								1.2	3.9
NNE	.2	.1	.1									.4	3.7
NE	.1	.2	.1	.1								.5	5.0
ENE	.4	.6	.3	.1								1.4	5.4
E	1.2	2.6	2.5	.7	.0							7.1	6.8
ESE	1.3	2.9	2.6	.9	.0							7.7	6.8
SE	1.1	2.4	1.9	.7	.1							6.1	6.6
SSE	1.1	1.9	1.3	.3	.0							4.5	6.0
S	.6	1.2	1.0	.1								2.9	5.8
SSW	.3	.2	.2	.1								.7	5.5
SW	.3	.2	.1	.1								.6	5.1
WSW	.8	.7	.3	.2	.0							2.1	5.7
W	1.9	2.9	2.1	.7	.1							7.7	6.2
WNW	1.7	3.5	3.3	1.3	.1	.0						9.8	6.9
NW	1.3	2.4	1.7	.6	.0							6.0	6.2
NNW	1.0	1.3	.4	.2								2.9	4.9
VARBL	.9	.6	.0									1.5	3.3
CALM												37.0	
	14.8	23.9	17.8	6.1	.4	.0						100.0	3.9

TOTAL NUMBER OF OBSERVATIONS 5817

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 68-70, 74-79 (YEARS) | JUN (MONTH)

ALL WEATHER (CLASS) | 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.8										1.1	3.6
NNE			.2									.2	6.0
NE	.2	.2										.3	3.5
ENE	.5	.6	.5	.2								1.7	6.1
E	1.1	2.6	1.2	.2								5.1	5.4
ESE	3.1	1.7	1.4	.5		.3						7.0	5.8
SE	.9	2.8	.8			.2						4.6	5.6
SSE	.9	2.2	1.2	.2								4.5	5.7
S	1.1	1.7	.9									3.7	5.0
SSW	.3		.2									.5	4.3
SW		.?	.2									.3	7.-
WSW	.2											.2	2.-
W	.5	.9	.2									1.5	4.5
WNW	.8	.8										1.5	5.9
NW	.9	.5	.2									1.5	3.7
NNW	1.2	1.2	.2									2.6	3.8
VARBL	.9	.5										1.4	3.3
CALM												62.2	
	12.8	16.6	7.0	.9		.5						100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 646

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUN (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.1										1.0	2.9
NNE	.1											.1	3.0
NE	.3											.3	2.0
ENE	.4	.9	.6									1.9	5.7
E	.7	1.6	.6	.1								3.1	5.5
ESE	1.8	1.6	1.3	.3		.1						5.2	5.8
SE	1.0	1.5	.4		.1	.1						3.3	6.1
SSE	.4	1.2	.7	.3								2.7	5.8
S	.3	.9	.6	.3								2.1	6.6
SSW	.1	.1	.1									.4	4.3
SW		.4										.4	4.7
WSW		.1	.3	.1								.6	8.0
W	.4	.9	.3									1.6	4.6
WNW	.6	.3	.1									1.0	3.4
NW	.9	.7										1.6	3.6
NNW	1.0	1.0	.3	.1								2.5	4.8
VARBL	.4	.4										.9	3.3
CALM												71.0	
	9.7	12.0	5.5	1.3	.1	.3						100.0	1.5

TOTAL NUMBER OF OBSERVATIONS 673

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.3										.7	3.2
NNE	.1											.1	3.
NE	.1											.1	2.0
ENE		.6	.3									.9	5.8
E	.4	2.4	1.0									3.9	5.7
ESE	1.5	1.6	.6	.1								3.9	4.9
SE	.7	1.3	.6	.3	.1	.1						3.3	7.0
SSE	.7	2.2	1.0	.1	.1							4.3	6.2
S	.7	1.0	.6									2.4	4.8
SSW	.1	.1	.1									.4	5.0
SW	.1	.1										.3	3.0
WSW	.1	.1	.1									.4	5.0
W	.6	1.6	.3									2.5	4.8
WNW	.7	.7	.1									1.6	4.3
NW	.3	.6	.4	.6								1.9	7.5
NNW	.7	.7										1.5	3.5
VARBL	1.9	.1										2.1	2.8
CALM												69.5	
	9.7	13.8	5.4	1.2	.3	.1						100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 672

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212	TAEGU AB KO	68-70,74-79	JUN
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0900-1100
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	.6										1.8	3.2
NNE	.5	.1	.1									.9	3.5
NE	.4	.1										.6	3.3
ENE	.1	.3	.1									.6	5.0
E	.6	1.8	2.1	.6	.1							5.2	7.6
ESE	1.2	1.6	1.8									4.6	5.9
SE	.7	1.5	2.1	.6	.3	.1						5.3	8.1
SSE	1.6	1.9	1.3	.4								5.3	5.7
S	.9	1.8	1.2									3.9	5.3
SSW	.1	.4	.4									1.0	6.1
SW	.1	.4	.1									.7	5.4
WSW	.6	1.0	.6									2.2	5.4
W	2.7	4.6	2.4									9.7	5.0
WNW	1.9	4.5	2.2	.1								8.8	5.3
NW	1.8	2.1	1.0	.7								5.6	5.9
NNW	2.1	1.8	.4									4.3	3.8
VARBL	3.3	.7										4.0	2.9
CALM												35.4	
	20.1	25.4	16.0	2.5	.4	.1						100.0	3.5

TOTAL NUMBER OF OBSERVATIONS 673

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUN (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.9	.4									1.9	4.8
NNE	.1	.1										.3	3.5
NE	.3	.1	.1									.6	4.5
ENE	.1		.1	.1								.4	8.3
E	.3	2.7	2.6	.7	.1							6.5	7.8
ESE	.9	1.6	3.0	.1								5.6	6.7
SE	.7	1.6	2.0	1.9		.4						6.6	9.5
SSE	1.3	2.6	1.3	.1								5.3	5.2
S	1.3	1.9	1.6	.1								4.9	5.6
SSW	.4	1.9	.6									2.9	5.6
SW	.1	.7	.7									1.6	6.5
WSW	.4	2.0	.7	.6		.1						3.9	7.0
W	.7	5.3	3.9	.3								10.2	6.1
WNW	2.5	4.3	4.0	.9	.1							11.8	6.2
NW	.1	2.?	2.0	.6	.1							4.9	7.4
NNW	1.3	2.6	1.0	.4								5.3	5.6
VARBL	4.9	2.6										7.5	3.2
CALM												19.6	
	16.2	33.0	24.2	5.9	.4	.6						100.0	5.0

TOTAL NUMBER OF OBSERVATIONS 693

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUN (MONTH)

ALL WEATHER (CLASS)

1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.9	.3									1.7	4.5
NNE	.3	.4	.4									1.2	5.8
NE	.1	.3	.3									.7	5.6
ENE		.3	1.3	.6								2.2	9.4
E	.1	1.9	2.2	.9								5.1	7.6
ESE	.6	2.6	3.6	1.3								8.2	7.8
SE	.6	2.0	3.2	1.3								7.1	7.9
SSE	.7	2.3	1.3	.3								4.7	6.1
S	1.5	3.1	1.7	.3								6.6	5.5
SSW	.6	1.5	1.0	.1								3.2	6.0
SW	.3	.6	.6	.9								2.3	8.2
WSW	.4	1.3	1.0	.3								3.1	6.7
W	1.3	3.6	2.6	.4								8.0	6.1
WNW	2.0	4.8	2.0	.7								9.6	5.7
NW	1.0	3.4	2.0	.3								6.7	6.0
NNW	2.0	2.9	2.6	.1								7.7	5.5
VARBL	2.8	2.6										5.4	3.4
CALM												16.5	
	15.0	34.5	26.4	7.6								100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 686

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | JUN MONTH

ALL WEATHER CLASS | 1800-2000 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.4	.9									1.9	5.3
NNE	.7	.4	.4	.1								1.7	5.0
NE	.3	.3	.1									.7	4.6
ENE	.3	1.2	1.6	.1								3.2	6.6
E	1.0	3.9	4.4	.6								9.9	6.7
ESE	1.3	3.3	2.9	.3								7.9	6.0
SE	1.2	2.5	2.5	1.0								7.1	6.9
SSE	.7	3.5	2.3	.1								6.7	6.2
S	1.6	2.8	1.0									5.4	4.7
SSW	1.2	1.3	.6	.3								3.3	5.2
SW	.3	.4	.1	.3								1.2	7.0
WSW	.4	1.2	.9									2.5	6.1
W	.7	3.5	1.5	.3								6.0	6.1
WNW	1.5	3.6	1.6									6.7	5.1
NW	1.3	2.2	.9									4.4	4.8
NNW	.7	1.9	.9									3.5	5.1
VARBL	1.2	1.3										2.5	3.7
CALM												25.5	
	15.0	33.8	22.6	3.2								100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 687

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUN (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	.3	.1									1.6	3.1
NNE	.3	.3										.6	3.8
NE	.1	.6	.3									1.0	5.1
ENE	1.0	1.0	1.0	.3								3.3	5.9
E	1.1	2.2	1.7	.6								5.5	6.4
ESE	2.5	4.4	2.0	.7			.3					9.9	6.1
SE	.9	3.1	2.2	.4								6.5	6.5
SSE	2.0	3.5	1.3	.1								7.0	5.0
S	.6	2.6	.3									3.5	4.8
SSW	.1	.6		.1								.9	6.8
SW	.4	.6	.1									1.2	4.4
WSW	.1	.4	.1									.7	5.8
W	.3	.6	.4									1.3	5.4
WNW	1.0	.7	.4									2.2	4.3
NW		.9										.9	4.3
NNW	.9	.7	.1	.1								1.9	4.5
VARBL	2.2	1.0										3.2	3.2
CALM												48.8	
	14.7	23.4	10.3	2.5			.3					100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 688

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70, 74-79 (YEARS) | JUN (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.5	.2									1.5	4.0
NNE	.3	.2	.1	.0								.6	4.7
NE	.2	.2	.1									.6	4.4
ENE	.3	.6	.7	.2								1.8	6.6
E	.7	2.4	2.0	.5	.0							5.6	6.7
ESE	1.6	2.3	2.1	.4		.1	.0					6.5	6.2
SE	.8	2.0	1.7	.7	.1	.1						5.5	7.4
SSE	1.1	2.4	1.3	.2	.0							5.1	5.7
S	1.0	2.0	1.0	.1								4.1	5.2
SSW	.4	.8	.4	.1								1.6	5.6
SW	.2	.4	.2	.1								1.0	6.5
WSW	.3	.8	.5	.1		.0						1.7	6.4
W	.9	2.7	1.5	.1								5.1	5.6
WNW	1.4	2.5	1.3	.2	.0							5.5	5.4
NW	.8	1.6	.8	.3	.0							3.5	5.8
NNW	1.3	1.6	.7	.1								3.7	4.9
VARBL	2.2	1.2										3.4	3.2
CALM												43.3	
	14.2	24.2	14.8	3.2	.2	.2	.0					100.0	3.3

TOTAL NUMBER OF OBSERVATIONS 5416

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6		.4									1.0	4.7
NNE	.7	.1										.9	2.7
NE	.3		.1			.3						.7	12.6
ENE	1.0	.7	.4									2.2	4.5
E	1.5	5.6	1.6	.1	.1							9.0	5.4
ESE	1.3	2.9	1.9									6.2	5.5
SE	2.1	1.3	.7									4.1	4.0
SSE	1.3	1.5	.4									3.2	4.2
S	1.5	1.3	.6									3.4	4.3
SSW	.1	.4										.6	4.3
SW													
WSW	.3											.3	2.5
W	.1	.9	.1									1.2	4.8
WNW	1.3	.7										2.1	3.2
NW	.7	.7										1.5	3.2
NNW	.6	.6	.1									1.3	3.7
VARBL	.9	.6										1.5	3.1
CALM												60.8	
	14.5	17.6	6.6	.1	.1	.3						100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 678

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43312 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.4	.3			.1						1.4	6.5
NNE	.1	.3										.4	3.7
NE	.3	.1				.1						.5	3.[illegible]
ENE	.4	1.1	.1									1.6	4.6
E	1.1	2.6	1.2	.1								5.1	5.5
ESE	1.6	3.2	1.9	.4								7.1	5.7
SE	1.5	1.6										3.2	3.8
SSE	1.4	1.2	.5									3.2	4.0
S	1.4	1.4	.3									3.0	4.1
SSW			.1									.1	7.0
SW													
WSW	.1											.1	3.0
W	.4	.4	.3									1.1	5.1
WNW	.5	.7	.1									1.4	4.2
NW	.8											.8	2.2
NNW	.4	.8	.3									1.5	4.5
VARBL	1.4	.3										1.6	2.4
CALM												67.7	
	12.1	14.1	5.2	.5		.3						100.0	1.5

TOTAL NUMBER OF OBSERVATIONS 728

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47312 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.1	.1									.6	4.3
NNE	.7	.4										1.1	3.5
NE	.1	.3										.4	4.3
ENE	.8	.7										1.5	3.3
E	1.5	2.6	1.7	.3								6.1	5.3
ESE	2.5	3.6	2.2									8.4	5.0
SE	1.5	2.2	.8	.1								4.7	5.0
SSE	1.7	1.1	.3									3.1	4.0
S	.3	1.4	.4									2.1	4.8
SSW													
SW	.1											.1	3.0
WSW	.1	.3										.4	5.0
W	.1	.6	.4									1.1	5.5
WNW	1.3	1.7	.7									3.6	4.3
NW	.4	.7			.1							1.3	5.6
NNW	1.0	.7										1.7	3.3
VARBL	1.8	.3										2.1	2.7
CALM												61.7	
	14.3	16.7	6.7	.4	.1							100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 718

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.3	.3									1.	4.6
NNE	.4	.1										.5	3.3
NE	.4	.3										.7	3.[illegible]
ENE	.4	.7	.4	.4								1.9	7.2
E	1.0	3.0	3.4	.8								8.2	7.0
ESE	1.9	4.[illegible]	3.4	1.0								10.2	6.3
SE	1.0	3.0	1.9	.1								6.0	5.8
SSE	1.5	2.7	1.0	.1								5.3	4.9
S	1.2	1.0	.8									3.0	4.7
SSW	.3	.5	.1									1.0	5.1
SW	.4	.3	.1									.8	3.8
WSW	.7	.8	1.0									2.5	5.[illegible]
W	2.3	4.6	1.9	.3								9.1	5.3
WNW	1.5	3.1	1.0									5.6	4.7
NW	1.6	2.2	.5									4.4	4.3
NNW	2.2	1.6	.4									4.2	3.9
VARBL	4.0	.7										4.6	2.7
CALM												31.0	
	21.1	28.9	16.2	2.7								1[illegible]0.0	3.6

TOTAL NUMBER OF OBSERVATIONS 733

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-73, 74-79 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.4	.7	.1									2.2	3.7
NNE		.3										.3	4.5
NE		.1	.7									.8	7.5
ENE	.6	.7	1.[illegible]	.1								2.3	5.5
E	1.2	2.6	3.7	2.2	.1							9.7	8.[illegible]
ESE	1.9	4.2	3.4	.6								9.8	6.[illegible]
SE	1.9	2.3	2.6	.7								7.6	6.[illegible]
SSE	1.4	2.6	2.1	.6								6.6	6.[illegible]
S	1.1	1.4	1.0									3.4	5.[illegible]
SSW	.1	.3	.8									1.2	7.[illegible]
SW	.3	.4	.3									1.0	5.[illegible]
WSW	.6	1.9	1.5	.4								4.4	6.[illegible]
W	2.2	4.7	2.2	.6								9.7	5.[illegible]
WNW	1.8	4.0	1.9	.3								8.0	5.[illegible]
NW	1.7	2.3	2.3	.1								6.5	5.[illegible]
NNW	1.1	1.8	1.2	.1								4.3	5.[illegible]
VARBL	5.5	1.4	.1									7.0	3.[illegible]
CALM												15.2	
	22.3	31.6	25.1	5.7	.1							100.[illegible]	5.[illegible]

TOTAL NUMBER OF OBSERVATIONS 72

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUL (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.8	.7	.1								2.5	5.7
NNE	.3	.3	.1	.1								.8	6.0
NE	.1	.3	.7									1.1	6.9
ENE	.4	.5	1.1	.3								2.3	6.8
E	.8	3.8	4.9	1.9	.1							11.6	7.
ESE	1.8	3.7	2.9	.8								9.2	6.3
SE	1.4	2.2	2.3	.3								6.1	6.0
SSE	1.1	3.4	1.8	.5								6.8	5.9
S	1.2	3.0	2.0									6.3	5.5
SSW	1.0	1.1	.4									2.5	4.5
SW	.3	1.0	.5	.1								1.9	6.0
WSW	1.4	2.6	.8									4.8	4.9
W	1.4	4.2	.4		.1							6.1	4.9
WNW	2.7	4.4	2.2	.1								9.4	5.2
NW	2.3	2.2	1.0									5.5	4.4
NNW	1.1	1.8	1.4	.3	.1							4.6	6.1
VARBL	2.6	1.4										4.0	3.1
CALM												14.5	
	20.6	36.6	23.2	4.6	.4							100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 732

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

-3712 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.4	.1									1.1	3.6
NNE	.5	.8	.3									1.6	4.6
NE	.1	.7	.4	.1								1.4	6.4
ENE	.1	1.1	1.8									3.0	7.0
E	1.9	3.7	4.5	.7								10.7	6.5
ESE	1.4	5.3	2.7	.7								9.7	6.0
SE	1.8	3.1	1.4									6.2	5.0
SSE	2.3	4.6	1.8	.1								8.5	5.0
S	2.2	2.4	1.2	.1								6.3	4.7
SSW	.8	.9	.3									2.0	4.2
SW	.1	.4										.5	4.5
WSW	.3	.8	.4	.1								1.6	5.8
W	1.8	1.5	.7									3.9	4.2
WNW	2.6	2.2	.8	.3								5.8	4.7
NW	2.4	2.0	.5									5.0	3.8
NNW	1.2	1.4	.3									2.8	3.9
VARBL	1.8	1.1	.3									3.1	3.6
CALM												26.9	
	21.5	32.1	17.3	2.2								100.0	3.6

TOTAL NUMBER OF OBSERVATIONS 739

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70, 74-79 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.3										.9	2.9
NNE	.1	.4										.5	4.3
NE	.3	.5	.1			.1						1.1	6.6
ENE	.7	1.4	.4	.1	.1							2.7	5.7
E	3.5	4.7	3.2	.3								10.3	5.6
ESE	2.8	4.1	3.2	.7								10.8	5.7
SE	1.8	2.2	1.5	.1								5.5	5.1
SSE	2.6	3.0	.5									6.1	4.0
S	1.4	1.4	.4									3.1	4.2
SSW	.5		.1									.7	3.6
SW	.3											.3	2.5
WSW													
W	.8	1.2	.1									2.2	3.8
WNW	.8	.9										1.8	3.5
NW	.5	1.1										1.6	3.9
NNW	.3	.7	.1									1.1	4.8
VARBL	1.2	.5										1.8	2.8
CALM												49.6	
	16.8	22.3	9.9	1.2	.1	.1						100.0	2.5

TOTAL NUMBER OF OBSERVATIONS 743

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.4	.3	.0		.0						1.3	4.6
NNE	.4	.3	.1	.0								.8	4.1
NE	.2	.3	.3	.0		.1						.8	6.9
ENE	.6	.9	.7	.1	.0							2.2	5.9
E	1.3	3.6	3.1	.8	.1							8.8	6.5
ESE	1.9	3.8	2.7	.5								9.0	5.9
SE	1.6	2.3	1.4	.2								5.5	5.3
SSE	1.6	2.5	1.1	.2								5.4	5.0
S	1.3	1.7	.8	.0								3.8	4.8
SSW	.4	.4	.2									1.0	4.8
SW	.2	.3	.1	.0								.6	5.0
WSW	.4	.8	.5	.1								1.8	5.7
W	1.2	2.3	.8	.1	.0							4.3	5.1
WNW	1.6	2.2	.8	.1								4.7	4.8
NW	1.3	1.4	.6	.0	.0							3.3	4.5
NNW	1.0	1.2	.5	.1	.0							2.7	4.8
VARBL	2.4	.8	.1									3.2	3.0
CALM												40.7	
	18.0	25.1	13.9	2.2	.1	.1						100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 5793

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47512 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | AUG (MONTH)

ALL WEATHER (CLASS) | 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	.9	.1									2.3	3.9
NNE	.1	.6										.7	5.3
NE													
ENE	1.2	.3	.1	.3								1.9	4.8
E	2.2	3.3	2.0	.6								8.1	5.5
ESE	2.0	3.6	1.6									7.2	4.9
SE	1.6	3.3	1.0									5.9	4.7
SSE	.9	1.4	.3									2.6	3.9
S	.6	1.3	.4	.1								2.2	5.7
SSW	.1	.1	.3									.6	5.3
SW	.3	.4										.7	4.3
WSW	.1											.1	2.0
W	.1	.3	.1	.1								.7	6.8
WNW	.1	.6	.4									1.2	5.5
NW	1.3	1.0	.4									2.5	4.6
NNW	.7	.4	.1									1.3	3.8
VARBL	.6	.6										1.2	3.8
CALM												61.1	
	12.7	17.9	7.1	1.2								100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 691

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-73,74-79 (YEARS) | AUG (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS [L.S.T.])

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.8	.4	.3									2.5	3.3
NNE	.3	.1										.4	2.7
NE	.3	.1	.1									.6	4.5
ENE	1.0	.3	.3	.1								1.7	4.6
E	2.5	1.8	1.2	.3								5.8	5.1
ESE	1.9	1.9	.7	.1								4.7	4.4
SE	1.2	1.4	1.1									3.7	5.2
SSE	.8	1.5	.3									2.6	4.3
S	.8	.4	.4									1.7	4.6
SSW		.1										.1	4.0
SW	.4											.4	3.0
WSW	.3											.3	2.5
W		.1	.1	.1								.4	9.3
WNW	.3	.8	.1									1.2	4.3
NW	.8	.8	.3									1.9	4.2
NNW	.0	.1	.3									1.0	4.3
VARBL	.6											.6	2.3
CALM												70.4	
	13.5	10.1	5.2	.7								100.0	1.3

TOTAL NUMBER OF OBSERVATIONS 724

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.4	.1									1.1	3.8
NNE	.1	.1										.3	3.0
NE				.3								.3	12.5
ENE	1.1	.6	.6									2.3	4.7
E	2.4	1.7	.8	.8								5.8	5.6
ESE	3.5	3.1	1.5									8.2	4.4
SE	1.3	1.8	.7	.1								3.9	4.9
SSE	.8	.7	.1	.1								1.8	4.3
S	.7	1.0	.3									2.0	4.6
SSW	.1											.1	2.0
SW													
WSW	.4	.1										.6	3.0
W	.1	.4	.1									.7	4.6
WNW	.8	1.1	.3									2.3	4.4
NW	.6	.4	.1									1.1	4.1
NNW	.8	.3	.3									1.4	4.1
VARBL	1.1											1.1	2.5
CALM												67.1	
	14.6	11.8	5.1	1.4								100.0	1.5

TOTAL NUMBER OF OBSERVATIONS 711

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47012 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | AUG (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.6										1.3	3.3
NNE			.1									.1	8.0
NE	.4	.1										.6	3.3
ENE	.4	.7	.4	.8								2.4	7.8
E	1.6	1.8	3.8	1.4	.3							8.9	8.0
ESE	2.1	3.3	4.2	1.0								10.6	6.4
SE	3.0	3.1	1.8	.4								8.3	5.1
SSE	1.0	1.6	1.0									3.5	5.2
S	1.0	1.0	.6									2.5	4.4
SSW	.1	.1	.1									.4	5.0
SW	.4	.6	.1									1.1	4.6
WSW	.7	.7	.4									1.8	4.5
W	1.7	3.1	.7	.3								5.8	5.2
WNW	2.1	3.4	2.1	.4								8.1	5.4
NW	2.0	1.4	.4	.1								4.0	4.2
NNW	2.3	1.7	.3									4.2	3.6
VARBL	2.5	.4	.1									3.1	2.7
CALM												33.1	
	22.1	23.6	16.4	4.5	.3							100.0	3.7

TOTAL NUMBER OF OBSERVATIONS 707

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS)

1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	1.0	.1									1.8	3.7
NNE	.8	.1	.3									1.2	4.1
NE			.7	.3								1.0	9.1
ENE	.1	1.[illegible]	1.5	.8								3.5	8.2
E	2.1	2.8	4.3	2.5	.1							11.8	8.0
ESE	1.5	2.2	4.2	1.4								9.3	7.3
SE	1.1	2.6	2.9	.7	.1							7.5	7.0
SSE	1.7	1.7	1.9	.4								5.7	6.0
S	1.4	1.4	1.2	.1								4.2	5.6
SSW	.4	1.2	.6									2.2	5.1
SW	.1	.7	.4									1.2	5.9
WSW	.7	1.0	1.5									3.2	6.0
W	2.8	3.2	4.2	.4								10.5	5.8
WNW	1.0	4.4	2.2	.3								7.9	5.9
NW	1.5	3.2	.8	.3								5.8	5.2
NNW	1.2	1.4	.8	.3								3.7	5.5
VARBL	3.0	1.7										4.7	3.1
CALM												14.8	
	20.2	29.5	27.7	7.5	.3							100.0	5.3

TOTAL NUMBER OF OBSERVATIONS 722

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.3	1.3										2.6	3.9
NNE	.4	.3	.1	.1								1.0	5.4
NE	.3	.7	.6									1.6	5.5
ENE	.4	1.1	1.9	1.4	.1							5.0	8.9
E	1.6	3.0	6.6	2.2								13.3	7.9
ESE	1.3	3.6	4.6	1.0								10.5	7.1
SE	1.7	3.4	2.2	1.0	.1							8.5	6.5
SSE	.9	2.7	2.2									5.7	6.0
S	1.0	2.2	2.0	.1								5.3	6.1
SSW	.3	.9	.3	.1								1.6	5.8
SW		1.3	.7									2.0	6.0
WSW	.6	1.4	2.4	.3								4.7	7.2
W	1.0	2.9	2.3									6.2	5.7
WNW	1.9	5.0	2.0									8.9	5.3
NW	1.1	1.7	.7	.1								3.7	4.9
NNW	2.0	2.6	1.0									5.6	4.7
VARBL	2.2	.6										2.7	2.8
CALM												11.0	
	17.9	34.7	29.6	6.5	.3							100.0	5.6

TOTAL NUMBER OF OBSERVATIONS 697

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | AUG (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.6	2.3										3.9	3.9
NNE	.4	.3										.7	3.4
NE	.3	1.0	.3									1.6	5.0
ENE	.6	1.9	1.9	.4	.3							5.0	7.5
E	2.3	6.0	7.5	1.0								16.8	6.6
ESE	2.2	4.5	4.2	.3								11.1	6.0
SE	1.0	1.9	2.6	.1								5.6	6.1
SSE	1.7	2.6	1.9									6.2	5.3
S	1.6	2.0	.7									4.3	4.4
SSW	1.0	1.4	.4									2.9	4.8
SW	.7	1.6	.1									2.4	4.7
WSW	.3	.6	.1									1.0	5.0
W	.6	1.1	1.0									2.7	5.7
WNW	1.6	.9	.4	.1								3.0	4.5
NW	.7	.9	.6									2.2	4.9
NNW	1.0	1.0	.4	.1								2.6	4.9
VARBL	1.4	.1										1.6	2.6
CALM												26.4	
	19.0	30.0	22.1	2.2	.3							100.0	4.1

TOTAL NUMBER OF OBSERVATIONS 696

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | AUG (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.5	.7										2.2	3.2
NNE	.5				.1							.7	6.2
NE	.3											.3	3.0
ENE	1.0	.7	.1	.4	.3							2.5	6.8
E	3.4	4.5	3.0	1.0								11.9	5.6
ESE	2.3	6.[illegible]	2.6	.3								11.2	5.4
SE	1.6	3.6	1.5									6.7	5.2
SSE	1.2	1.8	1.0									4.0	5.0
S	1.0	1.4	.7									3.0	4.7
SSW	.5	.1										.7	3.0
SW	.1	.5										.7	4.4
WSW		.1	.1	.1								.4	8.7
W	1.0	.3	.1									1.4	3.4
WNW	.7	.1										.8	3.2
NW		.7	.1									.8	5.5
NNW	.4	.5										1.0	3.7
VARBL	1.4	.7										2.1	2.9
CALM												49.8	
	17.0	21.8	9.3	1.8	.4							100.0	2.5

TOTAL NUMBER OF OBSERVATIONS 731

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-73,74-79 (YEARS) AUG (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	.9	.1									2.2	3.7
NNE	.4	.2	.1	.0	.0							.7	4.6
NE	.2	.2	.2	.1								.7	5.9
ENE	.7	.8	.8	.5	.1							3.0	7.2
E	2.3	3.1	3.6	1.2	.1							10.3	6.7
ESE	2.1	3.5	2.9	.5								9.1	5.9
SE	1.6	2.6	1.7	.3	.0							6.3	5.7
SSE	1.1	1.7	1.1	.1								4.0	5.3
S	1.0	1.3	.8	.1								3.1	5.1
SSW	.3	.5	.2	.0								1.1	4.9
SW	.3	.6	.2									1.1	5.0
WSW	.4	.5	.6	.1								1.5	6.1
W	.9	1.4	1.1	.1								3.6	5.6
WNW	1.1	2.0	1.0	.1								4.2	5.2
NW	1.0	1.3	.4	.1								2.7	4.8
NNW	1.1	1.0	.4	.1								2.6	4.5
VARBL	1.6	.5	.0									2.1	2.9
CALM												41.8	
	17.1	22.4	15.3	3.2	.2							100.0	3.2

TOTAL NUMBER OF OBSERVATIONS 5679

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WIND

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | SEP MONTH

ALL WEATHER CLASS

0000-2300 HOURS (L.S.T.)

CONDITION


SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.2	.8	.3									1.2	5.
NNE	.3	.2										.5	2.
NE	.6		.2									.8	3.
ENE	1.1	1.2	.3									2.6	4.
E	1.4	2.1	.9									4.4	4.
ESE	2.7	2.9	.5	.2								6.2	4.
SE	1.4	2.1	.9									4.4	4.
SSE	1.7	1.4	.5									3.6	4.
S	.8	.8	.2									1.7	4.
SSW	.3	.5										.8	4.
SW			.2	.2								.3	9.
WSW													
W	.5	.8										1.2	3.
WNW		1.1										1.1	5.
NW	.5	.6										1.1	4.
NNW	.5	.3	.3									1.1	5.
VARBL	.9	.2										1.1	2.
CALM												68.4	
	12.6	14.7	4.1	.3								100.0	1.


TOTAL NUMBER OF OBSERVATIONS 6(

AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC ...
TAEGU ABS KOREA. REVISED UNIFORM SUMMARY OF SURFACE WEATHER ...
OCT 81

UNCLASSIFIED USAFETAC/DS-81/100 SBI-AD-E850 142

2 OF 5
AD
A109 220

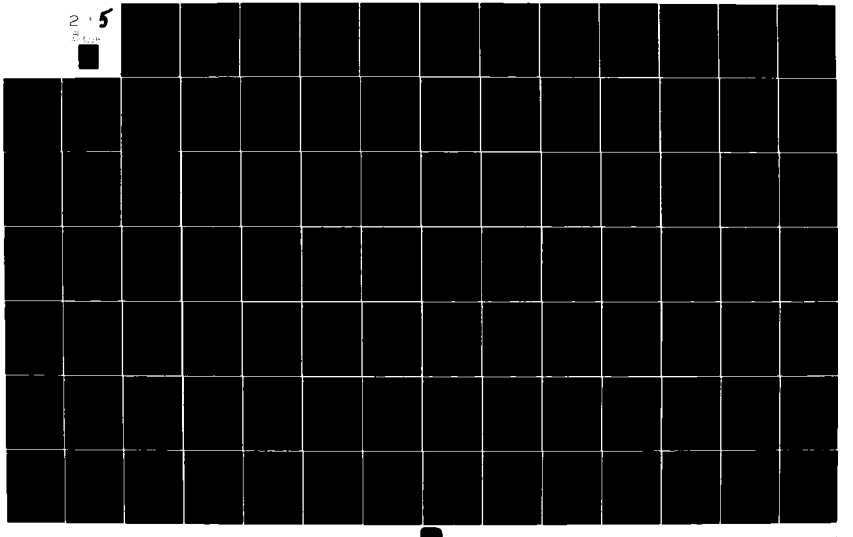

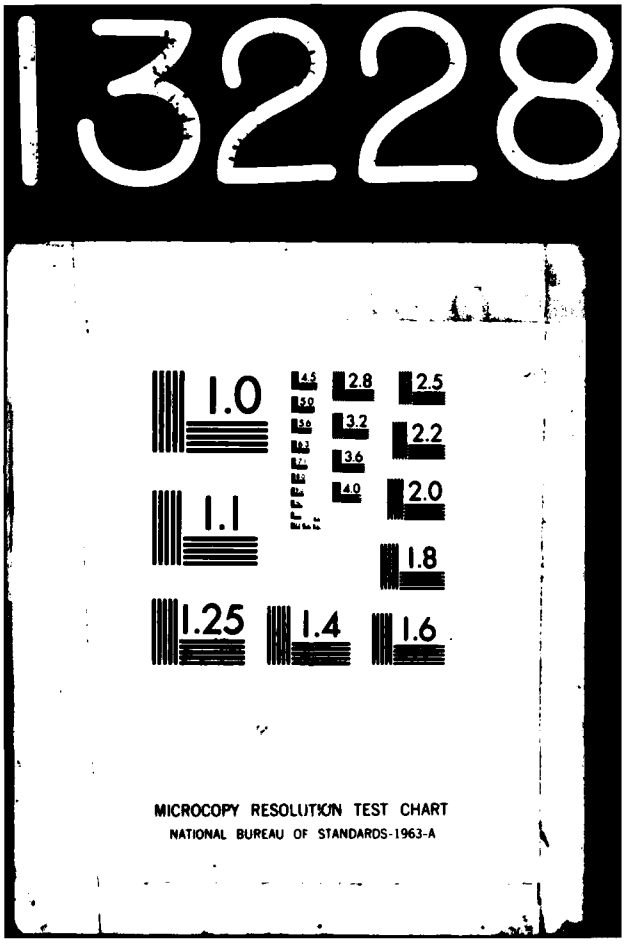
13228
1.0
1.1
1.25
1.4
1.6
2.8
3.2
3.6
4.0
2.5
2.2
2.0
1.8
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47_12 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | SEP (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.1										.3	3.5
NNE	.6	.3	.1									1.0	3.9
NE	.1	.4	.1									.7	5.4
ENE	.6	.3										.9	3.3
E	2.5	1.3	.3									4.1	3.7
ESE	2.0	2.2	.6	.1								5.0	4.6
SE	.6	1.6	.4	.1								2.8	5.6
SSE	.4	.9	.1									1.5	4.5
S	.9	.1	.1									1.2	3.6
SSW	.1											.1	3.0
SW			.1									.1	7.0
WSW		.1										.1	5.0
W	.1	.6	.4									1.2	5.6
WNW	.3	.3										.6	3.3
NW	.1	.7	.3									1.2	5.4
NNW	.6	.3	.4	.1								1.5	5.5
VARBL	.3	.7										1.0	3.7
CALM												76.7	
	9.5	10.1	3.2	.4								100.0	1.0

TOTAL NUMBER OF OBSERVATIONS 683

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4											.4	2.0
NNE	.4	.3										.7	3.4
NE				.1								.1	12.0
ENE	.6	.4	.4	.3								1.8	6.5
E	2.4	1.6	.7	.1								4.9	4.2
ESE	1.8	1.8	.9									4.5	4.7
SE	.3	1.6	.3									2.2	4.9
SSE	.3	.6										.9	3.7
S	.4	.4										.9	3.3
SSW	.1											.1	2.0
SW			.1									.1	8.0
WSW		.1	.1									.3	7.0
W	.6	.4	.1									1.2	3.9
WNW	.3	.3										.6	3.8
NW	.4	.9	.4									1.8	5.0
NNW	.7	.6	.1									1.5	3.8
VARBL	1.0	.1										1.2	2.9
CALM												76.6	
	10.0	9.4	3.4	.6								100.0	1.0

TOTAL NUMBER OF OBSERVATIONS 672

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | SEP (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.1		.1								.9	4.2
NNE		.3	.3		.1							.7	9.2
NE			.1	.1								.3	11.0
ENE	.7	.6	1.6	.3								3.2	7.0
E	.7	1.2	1.9	.3								4.1	6.8
ESE	1.9	2.2	3.0	.1	.1							7.4	6.2
SE	2.6	2.6	1.4	.3								6.9	5.0
SSE	1.4	1.2	.4	.1								3.2	4.7
S	1.2	1.2	.4									2.7	4.4
SSW	.3	.3										.6	3.8
SW	.4	.1	.1									.7	3.8
WSW	1.0	.1	.3									1.4	3.7
W	2.2	2.3	1.4	.1								6.1	4.8
WNW	2.0	2.0	.7	.4								5.2	5.0
NW	1.4	1.7	1.0	.1								4.3	5.1
NNW	1.3	.4	.6									2.0	4.6
VARBL	1.9	.9										2.7	2.9
CALM												47.5	
	19.4	17.2	13.5	2.2	.3							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 691

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.6	.3									1.2	5.5
NNE	.1	.3	.4									.9	6.0
NE		.1	1.5	1.0								2.7	10.2
ENE	.4	.9	2.2	.9								4.5	7.8
E	.6	2.4	4.5	1.2								8.6	7.9
ESE	1.3	3.3	5.7	.4								10.7	6.8
SE	.6	3.6	1.6	1.0								6.8	6.7
SSE	1.5	2.4	1.9	.1								6.0	5.7
S	1.6	2.1	.9									4.6	4.6
SSW	.7	.7	.1									1.6	3.9
SW	.6											.6	2.8
WSW	1.2	1.2	.6									3.0	4.6
W	2.8	3.6	1.8	.1								8.3	5.1
WNW	1.9	3.4	1.9	1.2								8.5	6.1
NW	1.0	1.8	1.3	.1								4.3	5.6
NNW	.1	2.1	1.6									3.9	6.2
VARBL	2.8	.9										3.7	3.0
CALM												20.1	
	17.9	29.3	26.5	6.2								100.0	4.9

TOTAL NUMBER OF OBSERVATIONS 672

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | SEP (MONTH)

ALL WEATHER (CLASS)

1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.6	.1									1.3	4.1
NNE	.1	.3	1.0									1.5	7.3
NE		.3	1.8	.6								2.7	9.1
ENE	1.2	2.2	2.1	.1								5.6	5.8
E	1.0	3.1	5.2	.7								10.0	7.1
ESE	2.2	4.3	7.1	1.6								15.2	7.0
SE	1.0	3.8	1.8	.7								7.4	6.4
SSE	1.0	2.9	1.0									5.0	5.2
S	.9	1.2	.3									2.4	4.2
SSW	.3	.6	.3									1.2	5.0
SW	.6	.4	.1									1.2	4.0
WSW	1.2	.6	.4									2.2	4.3
W	2.1	2.4	1.5	.9								6.8	5.8
WNW	1.5	3.4	1.5	.3								6.6	5.3
NW	.7	3.2	2.9	.1								7.1	6.1
NNW	1.3	2.2	1.6	.3								5.4	5.6
VARBL	2.7	.1										2.8	2.5
CALM												15.8	
	18.4	31.7	28.7	5.4								100.0	5.1

TOTAL NUMBER OF OBSERVATIONS 679

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.6	.4									1.8	4.8
NNE	.3		.3									.6	5.5
NE	.6	1.0	.6									2.2	5.3
ENE	1.0	3.4	2.2	.1								6.7	6.0
E	3.6	7.2	5.5	.4								16.8	5.6
ESE	2.6	3.4	2.6									8.6	5.2
SE	1.9	2.8	1.9	.1								6.7	5.5
SSE	1.0	2.5	1.2									4.7	5.2
S	.9	.1	.1									1.2	3.4
SSW	.3	.4										.7	4.0
SW		.1										.1	5.0
WSW	.6											.6	2.5
W	.4	1.3	.6									2.3	5.6
WNW	.9	1.2	.4	.3								2.8	5.2
NW	.7	1.3	.1									2.2	4.4
NNW	1.6	2.0	.3									3.9	4.1
VARBL	1.2	.3										1.5	2.8
CALM												36.6	
	19.4	27.6	16.4	1.0								100.0	3.3

TOTAL NUMBER OF OBSERVATIONS 685

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70, 74-79 (YEARS) | SEP (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3											.3	2.5
NNE													
NE	.6	.3	.1									1.0	4.0
ENE	.7	1.3	.4									2.5	4.8
E	3.2	4.5	2.2	.1								10.0	4.9
ESE	3.0	4.5	1.0	.1								8.7	4.6
SE	2.5	3.6	1.7	.4								8.3	5.1
SSE	1.7	3.0	1.3									6.1	4.8
S	.9	1.2										2.0	4.0
SSW		.1										.1	4.0
SW													
WSW		.1										.1	6.0
W		.7	.1									.9	5.5
WNW	.7	1.7										2.5	4.1
NW	.4	1.2	.9									2.5	5.5
NNW	.4	1.3	.4									2.2	5.0
VARBL	1.3	.4										1.7	2.9
CALM												51.2	
	15.8	24.1	8.3	.7								100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 698

USAFETAC FORM AIR 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) SEP (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.3	.1	.0								.9	4.5
NNE	.2	.2	.3		.0							.7	5.7
NE	.2	.3	.6	.2								1.3	7.5
ENE	.8	1.3	1.2	.2								3.5	6.0
E	1.9	2.9	2.7	.4								7.9	5.8
ESE	2.2	3.1	2.7	.3	.0							8.3	5.7
SE	1.4	2.7	1.3	.3								5.7	5.6
SSE	1.1	1.9	.8	.0								3.8	5.0
S	.9	.9	.3									2.1	4.2
SSW	.3	.3	.1									.7	4.1
SW	.2	.1	.1	.0								.4	4.6
WSW	.5	.3	.2									1.0	4.3
W	1.1	1.5	.8	.1								3.5	5.2
WNW	1.0	1.7	.6	.3								3.5	5.3
NW	.7	1.4	.9	.1								3.1	5.4
NNW	.8	1.2	.7	.1								2.7	5.1
VARBL	1.5	.5										2.0	2.9
CALM												49.1	
	15.3	20.5	13.0	2.1	.0							100.0	2.7

TOTAL NUMBER OF OBSERVATIONS 5433

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47?12 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 0000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.2										.6	2.8
NNE	.3	.2	.2									.6	4.5
NE	.3	.5	.3									1.1	4.7
ENE	.6	1.1	.3									2.0	4.2
E	1.1	.8	.3									2.2	3.5
ESE	.3	1.1	.6									2.0	5.5
SE	.5	.6										1.1	3.7
SSE		.2										.2	4.0
S													
SSW	.3											.3	2.0
SW	.2		.2									.3	5.0
WSW			.2									.2	8.0
W	.5	.5	.9									1.9	5.7
WNW	.6	.3	.9	.3								2.2	7.1
NW	.5	1.2	.6									2.3	5.4
NNW	.5	.2										.6	3.0
VARBL													
CALM												82.4	
	6.1	6.7	4.5	.3								100.0	.9

TOTAL NUMBER OF OBSERVATIONS 642

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N		.2										.2	6.0
NNE	.2											.2	3.0
NE	.2	.3										.5	4.0
ENE	.2	.2	.2									.5	5.7
E	.6	.9	.5									2.0	4.7
ESE	.3	.2										.5	3.0
SE	.5	.3	.2									.9	4.2
SSE													
S		.2										.2	6.0
SSW													
SW			.2									.2	10.0
WSW													
W		.9	1.1									2.0	6.7
WNW	.5	.6	1.7	.3								3.0	7.1
NW	.2	.2	.3	.3								.9	7.8
NNW	.3											.3	2.5
VARBL	.5											.5	2.0
CALM												88.6	
	3.2	3.8	3.9	.6								100.0	.7

TOTAL NUMBER OF OBSERVATIONS 664

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | OCT (MONTH)

ALL WEATHER (CLASS)

0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3		.2									.5	5.0
NNE	.2											.2	2.0
NE	.3	.3										.6	3.5
ENE		.2	.5									.6	7.0
E	.6	1.4										2.0	4.3
ESE	.6	.5										1.1	4.0
SE		.3										.3	5.0
SSE	.2	.2	.2									.5	6.0
S			.3	.2								.5	10.0
SSW													
SW		.2										.2	5.0
WSW		.2										.2	5.0
W	.9	.6	.8	.2								2.4	6.2
WNW	.5	.8	1.4									2.6	6.2
NW	.2	.2		.2								.5	7.0
NNW	.3	.2										.5	2.7
VARBL													
CALM												87.7	
	4.0	4.7	3.2	.5								100.0	.7

TOTAL NUMBER OF OBSERVATIONS 656

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47_12 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | OCT MONTH

ALL WEATHER CLASS

0900-1100 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3											.3	2.5
NNE	.2											.2	1.5
NE		.3	.3	.2								.8	8.8
ENE		.3	1.5									1.8	7.9
E	.8	1.7	.6	.2								3.2	5.5
ESE	1.2	1.1	.3									2.6	4.1
SE	.6	.6	.5									1.7	5.2
SSE	.3	.2	.2									.6	4.5
S		.5	.2									.6	6.5
SSW	.3											.3	2.5
SW	.2	.2	.2									.5	5.0
WSW	1.4	.6	.5									2.5	4.3
W	2.9	2.6	2.6	.2								8.3	4.9
WNW	2.2	2.8	1.1	.9	.3							7.2	6.3
NW	.9	.8	.5	.9								3.1	7.0
NNW	1.4	.8	.2	.3								2.6	4.4
VARBL	.5		.2									.6	3.8
CALM												63.0	
	13.1	12.3	8.6	2.6	.3							100.0	2.0

TOTAL NUMBER OF OBSERVATIONS 649

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | OCT (MONTH)

ALL WEATHER (CLASS) | 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.4	.4	.6								1.8	7.6
NNE	.1	.1	.1	.1								.6	7.8
NE	.3	.4	.8	.1								1.7	6.8
ENE	.4	1.1	2.4	.3								4.2	7.0
E	.8	3.7	2.8	.6								7.9	6.5
ESE	1.0	2.0	2.5	.3								5.8	6.4
SE	.6	1.3	.8	.1								2.8	5.6
SSE	.4	.6	.3	.1								1.4	5.7
S	.8	.6	.1	.1								1.7	4.5
SSW	1.3		.1									1.4	2.7
SW	.3	.3	.1	.1								.8	5.7
WSW	1.5	1.8	.3									3.7	3.8
W	3.2	5.5	3.4	.6								12.7	5.4
WNW	3.2	5.3	3.5	1.5	.1							13.8	6.2
NW	1.1	3.0	1.8	.4	.4							6.8	6.9
NNW	2.0	1.5	.8	.3								4.6	5.1
VARBL	1.3	.6										1.8	3.0
CALM												26.6	
	18.8	28.1	20.5	5.3	.6							100.0	4.3

TOTAL NUMBER OF OBSERVATIONS 711

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47812 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | OCT (MONTH)

ALL WEATHER (CLASS) | 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.2	2.2	.7									4.1	4.7
NNE		.9	.3									1.2	6.0
NE	.1	.3	.7	.3								1.5	8.0
ENE	.9	2.0	1.9	.3	.1							5.2	6.9
E	.7	3.8	6.1	.9								11.5	7.3
ESE	1.2	2.2	2.6									6.0	5.9
SE	.9	.9	.4	.3								2.5	5.5
SSE	.6	1.0	.4									2.0	4.7
S	.3	.7	.4									1.5	5.5
SSW													
SW	.6	.3	.1									1.0	3.9
WSW	.9	1.0	.1									2.0	4.0
W	1.6	3.6	1.7									7.0	5.3
WNW	3.5	5.2	4.1	.6	.1							13.5	5.8
NW	2.0	3.6	3.9	1.0	.1							10.8	6.5
NNW	1.7	2.2	1.3									5.2	4.9
VARBL	.6	.1										.7	2.8
CALM												24.3	
	16.7	30.1	25.0	3.3	.4							100.0	4.5

TOTAL NUMBER OF OBSERVATIONS 687

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47612 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) OCT (MONTH)

ALL WEATHER (CLASS) 1800-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.4										1.3	3.1
NNE	.4	.3										.7	3.4
NE	.7	1.1	.3									2.1	4.6
ENE	1.[illegible]	2.6	1.3	.1								5.2	5.6
E	1.7	5.[illegible]	3.9	.4								11.0	5.9
ESE	2.4	2.7	1.3	.1								6.6	5.0
SE	.3	1.1	.6									2.0	5.7
SSE	.6	1.0	.6									2.1	4.9
S	.1	.4	.3									.9	6.0
SSW	.3											.3	2.5
SW			.1									.1	10.0
WSW	.4	.1	.3									.9	5.5
W	1.0	.4	.6									2.0	4.1
WNW	1.7	2.1	1.3	.1								5.3	5.2
NW	1.4	2.9	1.1	.1								5.6	5.2
NNW	.7	1.1	.6	.1								2.6	5.2
VARBL	.6											.6	2.3
CALM												50.7	
	14.5	21.5	12.2	1.1								100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 698

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
JUL 64

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | IAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | OCT (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.1	.3	.4									.9	6.0
NNE	.3	.1	.1									.6	3.8
NE	.4	.6	.1									1.2	4.0
ENE	.9	.9	.1	.1								2.0	4.6
E	1.8	2.2	1.0									5.0	4.6
ESE	1.8	1.9	.9									4.5	4.3
SE	.6	.7	.1									1.5	4.1
SSE	.1	1.0	.1									1.3	4.6
S	.9	.1										1.0	2.7
SSW													
SW													
WSW			.1									.1	7.0
W	.3	1.3	.3									1.9	5.[illegible]
WNW	.4	2.2	1.2	.1								3.9	5.7
NW	.7	1.0	.7	.4								2.9	6.4
NNW	.4	.4	.4									1.3	5.2
VARBL	.1											.1	2.0
CALM												71.6	
	8.9	12.9	5.8	.7								100.0	1.4

TOTAL NUMBER OF OBSERVATIONS 684

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | OCT (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.5	.2	.1								1.2	5.0
NNE	.2	.2	.1	.0								.5	4.8
NE	.3	.5	.3	.1								1.2	5.7
ENE	.5	1.1	1.0	.1	.0							2.7	6.2
E	1.0	2.5	1.9	.3								5.7	6.0
ESE	1.1	1.5	1.1	.1								3.7	5.2
SE	.5	.7	.3	.1								1.6	5.1
SSE	.3	.5	.2	.0								1.0	5.0
S	.3	.3	.2	.0								.8	5.2
SSW	.3		.0									.3	2.6
SW	.1	.1	.1	.0								.4	5.3
WSW	.5	.5	.2									1.2	4.3
W	1.3	2.0	1.4	.1								4.8	5.3
WNW	1.6	2.5	1.9	.5	.1							6.5	6.1
NW	.9	1.6	1.2	.4	.1							4.2	6.4
NNW	.9	.8	.4	.1								2.3	4.8
VARBL	.4	.1	.0									.6	2.8
CALM												61.2	
	10.8	15.3	10.7	1.9	.2							100.0	2.2

TOTAL NUMBER OF OBSERVATIONS 5391

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43212 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 1000-0200 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.5			.2							1.5	4.9
NNE	.2			.2	.3							.6	13.3
NE	.2											.2	2.0
ENE			.2									.2	7.0
E													
ESE	.2	.3										.5	3.7
SE	.2	.2	.2									.5	4.7
SSE			.2									.2	7.0
S		.2										.2	4.0
SSW													
SW													
WSW	.3	.5	.2		.2							1.1	7.1
W	1.1	2.1	1.1	.3		.2						4.7	6.2
WNW	1.4	2.7	4.1	.3	.2							8.6	6.8
NW	1.1	1.4	1.8		.5							4.7	7.1
NNW	.6	1.5	1.8	.2								4.1	6.4
VARBL													
CALM												73.1	
	5.9	9.3	9.4	.9	1.2	.2						100.0	1.8

TOTAL NUMBER OF OBSERVATIONS 659

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | NOV (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.4		.1	.1							1.3	6.6
NNE	.4	.3		.3	.1							1.2	7.8
NE	.1											.1	2.0
ENE	.1	.1										.3	3.5
E			.1									.1	8.0
ESE	.3	.1										.4	2.3
SE	.3	.4										.7	3.2
SSE			.3	.1								.4	8.3
S	.3	.1										.4	3.0
SSW	.1											.1	2.0
SW													
WSW	.1	.3				.1						.6	8.3
W	.9	2.1	.9	.3								4.2	5.8
WNW	1.8	3.7	1.5	1.2	.1							8.3	6.6
NW	.6	2.2	1.2	.4	.1							4.6	6.5
NNW	1.0	1.8	.9	.4								4.2	5.8
VARBL	.1											.1	3.0
CALM												72.6	
	7.0	11.8	4.9	3.0	.6	.1						100.0	1.7

TOTAL NUMBER OF OBSERVATIONS 672

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

43612	TAEGU AB KO	68-69,73-79	NOV
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

0600-0800
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.9	.5									1.7	5.5
NNE	.3	.2		.3								.8	6.6
NE	.2											.2	2.0
ENE													
E		.2	.2									.3	6.5
ESE	.2	.2										.3	4.5
SE	.2											.2	2.0
SSE	.2											.2	3.0
S	.2		.2									.3	5.0
SSW	.2											.2	3.0
SW													
WSW			.3	.2								.5	10.3
W	1.4	2.3	1.1	.5								4.9	5.8
WNW	1.2	3.7	2.2	1.2								8.3	6.8
NW	1.1	2.0	1.5	.3								4.9	5.9
NNW	.8	1.7	1.2	.2								3.8	5.8
VARBL	.2											.2	2.0
CALM												73.4	
	6.2	10.8	7.1	2.6								100.0	1.6

TOTAL NUMBER OF OBSERVATIONS 651

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | NOV (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.2	1.1	.3								2.2	6.7
NNE	.2	.2		.2								.5	7.0
NE													
ENE													
E			.3									.3	7.5
ESE	.2	.2	.3									.6	6.3
SE		.2										.2	4.0
SSE	.3	.3										.6	4.3
S	.2	.2										.3	4.0
SSW		.3										.3	6.0
SW	.3		.2									.5	5.0
WSW	.8	.8	.3	.2								2.0	5.1
W	.9	4.8	3.1	.8	.2							9.7	6.9
WNW	3.1	3.1	3.5	3.7	.6							14.0	8.0
NW	1.2	1.5	2.2	2.2	.2							7.2	8.4
NNW	1.1	1.5	1.5	1.5	.5							6.1	8.3
VARBL	.2				.2							.3	11.5
CALM												55.3	
	8.9	13.1	12.4	8.8	1.5							100.0	3.4

TOTAL NUMBER OF OBSERVATIONS 651

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.9	.3	.3	.3	.1						2.3	9.1
NNE		.1		.1								.3	10.0
NE			.1	.1								.3	12.0
ENE		.3	.3	.6								1.2	9.6
E		.7	.4	.1								1.3	7.3
ESE		.4	1.3	.1								1.9	7.9
SE		.6		.1								.7	5.8
SSE	.7		.1									.9	3.7
S	.3	.6	.1									1.0	4.9
SSW	.4	.1		.1								.7	5.4
SW	.1	.4	.4	.4								1.5	8.5
WSW	1.5	2.9	1.5	.3								6.1	5.7
W	4.2	5.0	7.3	1.9								18.4	6.7
WNW	2.5	4.8	4.8	3.8	1.2	.7						17.8	9.0
NW	1.9	2.8	4.2	3.4	.7							13.0	8.5
NNW	1.3	2.3	2.2	1.6	.9							8.3	8.7
VARBL	.6											.6	2.8
CALM												23.6	
	14.0	22.0	23.2	13.1	3.1	.9						100.0	6.0

TOTAL NUMBER OF OBSERVATIONS 685

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | IAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | NOV (MONTH)

ALL WEATHER (CLASS) | 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	1.1	.6	.4								3.0	6.1
NNE	.1	.3	.1									.6	5.3
NE		.4	.6		.4							1.4	10.3
ENE		.9	.9	.3								2.0	7.4
E	.3	.7	1.6	.3								2.9	7.4
ESE			.7	.4								1.1	9.5
SE	.4	.4										.9	3.7
SSE	.4	.4										.9	4.0
S	.6	.4	.6									1.6	5.1
SSW		.4										.4	5.3
SW	.3	.6	.6	.1								1.6	6.2
WSW	1.3	1.7	1.3	.4								4.7	5.9
W	2.6	6.2	5.0	.9	.1							14.7	6.4
WNW	2.6	3.3	6.9	4.0	.7	.1	.1					17.7	8.8
NW	2.1	4.7	3.4	3.1	.6							14.0	7.8
NNW	2.1	4.0	3.3	1.0	.3							10.7	6.7
VARBL	.3											.3	3.0
CALM												21.5	
	14.0	25.6	25.5	11.0	2.1	.1	.1					100.0	5.7

TOTAL NUMBER OF OBSERVATIONS 699

USAFETAC FORM 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47612 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | NOV (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.7	.8	.1	.4								3.1	4.3
NNE	.4	.6		.1								1.1	4.6
NE	.1	.1	.1	.3								.7	8.8
ENE	.6	.3	.7									1.5	5.9
E	1.3	1.1	.7									3.1	4.8
ESE	.4	.4	.6									1.4	5.6
SE	.3	.7	.4									1.4	5.0
SSE	.1	.1										.3	4.0
S	.3	.1		.1								.6	5.3
SSW	.1	.1										.3	3.5
SW	.1			.1								.3	3.5
WSW	.1	.1	.3									.6	6.0
W	1.7	1.8	1.5	1.0								6.0	6.2
WNW	3.2	4.2	3.4	1.5								12.3	6.4
NW	2.7	3.4	2.7	.8	.4							9.9	6.4
NNW	1.1	2.2	1.8									5.2	5.2
VARBL	.1											.1	2.0
CALM												52.2	
	14.4	16.2	12.3	4.5	.4							100.0	2.8

TOTAL NUMBER OF OBSERVATIONS 715

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212	TAEGU AB KO	68-69,73-79	NOV
STATION	STATION NAME	YEARS	MONTH

ALL WEATHER
CLASS

2100-2300
HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.4										1.0	3.3
NNE	.3	.1		.1								.6	6.3
NE			.1									.1	10.0
ENE	.3	.1										.4	3.7
E	.4	.3	.4									1.1	5.1
ESE	.3	.4	.1									.9	4.3
SE	.3	.4	.1									.9	4.5
SSE	.1	.3										.4	4.3
S													
SSW													
SW													
WSW	.1	.1	.1									.4	5.3
W	1.3	1.1	1.9	.9	.1							5.3	7.2
WNW	2.3	3.9	3.4	1.0	.3							10.8	6.8
NW	.7	1.3	2.1	.7								4.9	7.1
NNW	1.0	2.9	1.1	.4								5.4	5.9
VARBL													
CALM												67.8	
	7.7	11.4	9.6	3.1	.4							100.0	2.1

TOTAL NUMBER OF OBSERVATIONS 701

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47912 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) NOV (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.7	.3	.2	.1	.0						2.0	5.9
NNE	.2	.2	.0	.2	.1							.7	7.2
NE	.1	.1	.1	.1	.1							.4	8.9
ENE	.1	.2	.3	.1								.7	6.9
E	.3	.4	.5	.1								1.2	6.2
ESE	.2	.3	.4	.1								.9	6.4
SE	.2	.4	.1	.0								.7	4.4
SSE	.2	.1	.1	.0								.5	4.6
S	.2	.2	.1	.0								.6	4.7
SSW	.1	.1		.0								.3	4.8
SW	.1	.1	.1	.1								.5	7.1
WSW	.5	.8	.5	.1	.0	.0						2.0	6.0
W	1.8	3.1	2.7	.8	.1	.0						8.5	6.5
WNW	2.3	3.7	3.7	2.1	.4	.1	.0					12.3	7.7
NW	1.4	2.4	2.4	1.4	.3							8.0	7.5
NNW	1.1	2.3	1.7	.7	.2							6.0	6.9
VARBL	.2				.0							.2	4.3
CALM												54.6	
	9.8	15.1	13.1	5.9	1.2	.2	.0					100.0	3.1

TOTAL NUMBER OF OBSERVATIONS 5432

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 STATION | TAEGU AB KO STATION NAME | 68-69,73-80 YEARS | DEC MONTH

ALL WEATHER CLASS | 0000-0200 HOURS (L.S.T.)

CONDITION

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	1.1	.9	.1	.3								2.4	4.6
NNE	.3		.1									.4	5.3
NE	.1											.1	4.0
ENE	.3											.3	3.0
E	.1	.8	.3	.1								1.3	6.1
ESE	.3	.3										.6	3.3
SE													
SSE	.1											.1	2.0
S													
SSW		.1										.1	5.0
SW													
WSW	.1	.4	.1	.3								.9	7.6
W	.8	3.0	2.8	.5	.3							7.4	6.9
WNW	1.3	3.0	4.9	2.1	.5							11.9	8.2
NW	1.3	2.0	2.0	1.8	.4	.1						7.6	8.4
NNW	1.2	.8	1.2									3.2	4.9
VARBL	.4											.4	2.3
CALM												63.4	
	7.4	11.3	11.5	5.1	1.2	.1						100.0	2.6

TOTAL NUMBER OF OBSERVATIONS 759

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47.12 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-80 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS) | 0300-0500 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.8	.4	.1									1.3	3.2
NNE													
NE	.3											.3	2.0
ENE		.6	.1									.8	5.0
E	.5	.1	.4									1.0	5.3
ESE	.8	.4	.1									1.3	3.7
SE	.3	.4										.6	3.6
SSE	.1											.1	3.0
S		.1										.1	6.0
SSW													
SW		.1										.1	5.0
WSW		.1	.1									.3	7.0
W	.8	2.0	2.0	.5	.1							5.5	6.7
WNW	.9	3.2	5.0	2.7	.1							11.8	8.2
NW	2.2	2.4	3.0	1.3	.1							9.0	6.9
NNW	1.3	1.3	.3	.3								3.0	4.6
VARBL													
CALM												64.8	
	7.8	11.2	11.2	4.7	.4							100.0	2.3

TOTAL NUMBER OF OBSERVATIONS 787

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-80 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS) | 0600-0800 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.1		.1								.9	3.9
NNE	.4											.4	2.7
NE	.3											.3	2.0
ENE													
E	.5	.7	.3									1.5	4.5
ESE	.3	.4	.4									1.1	5.3
SE		.1										.1	5.0
SSE		.1										.1	6.[illegible]
S													
SSW													
SW													
WSW	.3	.5	.4	.1								1.4	5.9
W	.7	2.4	2.0	.7	.5							6.4	7.8
WNW	1.1	5.1	2.8	1.2	.3							10.6	6.8
NW	2.2	3.0	2.4	.8								8.4	6.3
NNW	1.1	1.1	.4	.3								2.8	4.9
VARBL	.1											.1	2.0
CALM												65.9	
	7.6	13.7	8.8	3.2	.8							100.0	2.1

TOTAL NUMBER OF OBSERVATIONS 739

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
ATR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-80 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS) | 0900-1100 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3											.3	2.0
NNE													
NE	.1											.1	2.0
ENE													
E	.1	.4	.1									.7	5.0
ESE	.7	.4										1.1	3.8
SE	.5	.4										.9	3.4
SSE	.3	.1	.1									.5	4.5
S	.3	.1										.4	3.0
SSW	.1		.1									.3	5.5
SW		.1										.1	6.0
WSW	.7	1.1	.9	.5								3.2	6.7
W	1.3	4.7	6.0	2.4	.5	.1						15.1	6.2
WNW	1.1	4.6	5.5	3.5	.3							14.9	6.3
NW	1.7	2.1	3.4	1.9	.5							9.7	7.9
NNW	.8	.5	.5	.3	.1							2.3	6.4
VARBL	.3											.3	2.5
CALM												5.1	
	8.3	14.6	16.8	8.6	1.5	.1						100.0	3.8

TOTAL NUMBER OF OBSERVATIONS 746

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-80 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) 1200-1400 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.3	.5	.1									.9	4.4
NNE			.1									.1	9.0
NE													
ENE	.1	.1										.3	4.0
E		.3	.8									1.0	7.5
ESE	.3	.4										.6	4.8
SE	.3	.4			.1							.8	6.5
SSE		.1										.1	4.0
S		.1	.1									.3	7.0
SSW	.3	.1	.3	.1								.8	6.7
SW	.6	.1	.4		.1							1.3	6.0
WSW	1.3	1.7	1.7	.3	.1	.1						5.1	6.7
W	3.6	7.0	7.6	5.7	1.1	.3	.1					25.4	8.9
WNW	2.4	4.3	9.1	6.2	.9							23.0	6.7
NW	1.4	1.9	5.2	4.3	1.3							14.1	9.9
NNW	.5	1.8	1.0	.3	.3							3.8	6.6
VARBL	.8	.1										.9	2.9
CALM												21.6	
	11.7	18.9	26.4	16.9	3.9	.4	.1					100.0	6.6

TOTAL NUMBER OF OBSERVATIONS 787

USAFETAC FORM JUL 64 0-8-5 (OL-A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-80 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS) | 1500-1700 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.5	.5	.1									1.2	4.2
NNE			.1									.1	7.0
NE		.1										.1	5.0
ENE		.4	.6									1.0	6.8
E	.3	.3	.5	.1								1.7	6.3
ESE	.1	.1	.4									.6	5.6
SE	.3	.1	.1									.5	4.8
SSE	.1											.1	3.0
S		.1										.1	5.0
SSW	.1		.1									.3	6.0
SW		.4			.1							.5	8.8
WSW	1.4	1.7	1.0	.1		.3						4.5	6.0
W	2.2	5.3	5.7	3.2	.6	.1						17.2	8.0
WNW	4.3	4.7	10.8	7.6	.5	.4						28.2	8.7
NW	1.4	4.1	7.3	5.4	1.0							19.3	9.1
NNW	1.7	1.7	1.8	.6		.1						6.0	6.5
VARBL	.5	.1										.6	2.6
CALM												17.7	
	13.0	20.2	28.6	17.2	2.3	.9						100.0	6.6

TOTAL NUMBER OF OBSERVATIONS 772

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47312 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-80 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS) | 1800-2000 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.6	.1									1.7	3.9
NNE	.1	.1	.1									.4	5.0
NE	.3											.3	2.0
ENE	.1	.5										.6	4.4
E	.3	1.2	.8									2.2	6.0
ESE	.6	.3										.9	3.4
SE	.4	.4										.8	3.3
SSE	.1											.1	3.0
S			.1									.1	8.0
SSW		.1										.1	4.0
SW		.1										.1	6.0
WSW	.5	.1	.3	.1								1.0	5.5
W	1.3	3.0	2.4	.8	.5							8.0	7.4
WNW	2.2	7.5	6.6	1.9	.4	.3						18.8	7.2
NW	2.3	6.3	3.1	2.2	.3							14.1	6.7
NNW	1.8	3.0	1.2	.3		.1						6.3	5.6
VARBL	.4											.4	2.3
CALM												44.1	
	11.3	23.1	14.7	5.3	1.2	.4						100.0	3.6

TOTAL NUMBER OF OBSERVATIONS 778

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-80 (YEARS) | DEC (MONTH)

ALL WEATHER (CLASS) | 2100-2300 (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.9	.2	.2	.1								1.5	4.3
NNE	.5	.2	.1									.9	4.1
NE	.4	.1										.5	2.5
ENE	.4		.1									.5	3.8
E	.2	.7	.6	.1								1.7	6.6
ESE	.2	.4										.6	3.6
SE	.2	.4										.6	3.6
SSE	.1		.1									.2	5.5
S	.1											.1	2.0
SSW		.1	.1									.2	7.0
SW													
WSW	.2	.4	.2	.1								1.0	5.5
W	1.7	2.6	2.5	.6								7.5	6.2
WNW	3.4	5.7	5.7	.7	.7							16.3	6.6
NW	2.0	3.0	3.9	.6								9.4	6.4
NNW	1.5	1.6	.2			.1						3.5	4.4
VARBL	.2	.1										.4	3.0
CALM												55.0	
	12.2	15.7	13.9	2.4	.7	.1						100.0	2.7

TOTAL NUMBER OF OBSERVATIONS 805

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47512 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-80 (YEARS) DEC (MONTH)

ALL WEATHER (CLASS) ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.7	.4	.1	.1								1.3	4.1
NNE	.2	.0	.1									.3	4.4
NE	.2	.0										.2	2.4
ENE	.1	.2	.1									.4	5.0
E	.3	.6	.5	.0								1.4	6.0
ESE	.4	.3	.1									.8	4.2
SE	.2	.3	.0		.0							.6	4.2
SSE	.1	.0	.0									.2	4.2
S	.0	.1	.0									.1	4.9
SSW	.1	.1	.1	.0								.2	6.1
SW	.1	.1	.0		.0							.3	6.6
WSW	.6	.7	.6	.2	.0	.0						2.2	6.4
W	1.6	3.8	3.9	1.8	.5	.1	.0					11.6	7.8
WNW	2.1	4.8	6.3	3.3	.5	.1						17.0	8.0
NW	1.8	3.1	3.8	2.3	.5	.0						11.5	7.9
NNW	1.2	1.5	.8	.2	.0	.0						3.9	5.6
VARBL	.3	.0										.4	2.6
CALM												47.7	
	9.9	16.1	16.5	7.9	1.5	.3	.0					100.0	3.6

TOTAL NUMBER OF OBSERVATIONS 6173

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47312 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,73-81 (YEARS) | ALL (MONTH)

ALL WEATHER (CLASS) | ALL (HOURS (L.S.T.))

(CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.6	.5	.2	.1	.0	.0						1.4	4.5
NNE	.2	.2	.1	.0	.0							.5	4.7
NE	.2	.2	.2	.1	.0	.0						.6	6.0
ENE	.4	.6	.6	.1	.0							1.7	6.4
E	.9	2.[illegible]	2.0	.5	.0							5.4	6.6
ESE	1.1	1.9	1.6	.5	.0	.0	.0					5.2	6.3
SE	.8	1.4	1.0	.3	.0	.0						3.6	6.3
SSE	.7	1.1	.6	.2	.0	.0						2.6	5.7
S	.5	.8	.4	.1								1.8	5.3
SSW	.2	.3	.1	.0	.0							.7	5.2
SW	.2	.2	.2	.0	.0							.6	5.7
WSW	.5	.7	.5	.1	.0	.0						1.8	6.0
W	1.4	2.8	2.4	.9	.2	.0	.0					7.7	6.9
WNW	1.7	3.3	3.2	1.8	.3	.1	.0	.0				10.4	7.6
NW	1.3	2.3	2.2	1.3	.2	.0	.0					7.5	7.5
NNW	1.1	1.4	.9	.3	.1	.0						3.8	6.0
VARBL	1.0	.5	.0		.0							1.5	3.2
CALM												43.3	
	12.9	20.1	16.3	6.4	.9	.2	.0	.0				100.0	3.7

TOTAL NUMBER OF OBSERVATIONS 67746

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

SURFACE WINDS

PERCENTAGE FREQUENCY OF WIND DIRECTION AND SPEED (FROM HOURLY OBSERVATIONS)

47112 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,73-81 (YEARS) | ALL (MONTH)

INSTRUMENT (CLASS) | ALL (HOURS (L.S.T.))

CIG 200 TO 1400 FT W/ VSBY 1/2 MI OR MORE, AND/OR VSBY 1/2 TO 2-1/2 MI W/CIG 200 FT OR MORE (CONDITION)

SPEED (KNTS) DIR.	1 - 3	4 - 6	7 - 10	11 - 16	17 - 21	22 - 27	28 - 33	34 - 40	41 - 47	48 - 55	≥56	%	MEAN WIND SPEED
N	.4	.2	.1			.0						.8	4.3
NNE	.1	.1	.1									.2	4.5
NE	.2	.1	.0	.1		.1						.5	6.8
ENE	.2	.4	.2	.1	.0							.9	6.7
E	.7	1.4	1.2	.3	.0							3.6	6.5
ESE	1.5	2.1	1.3	.5	.1	.0						5.6	6.2
SE	1.0	1.6	.8	.5	.1							4.0	6.2
SSE	.8	1.2	.8	.3	.0							3.1	6.0
S	.5	.5	.3	.1								1.4	5.3
SSW	.1	.1	.0	.0	.0							.3	5.6
SW	.1	.1	.1		.0							.3	5.6
WSW	.3	.2	.1	.0								.6	4.7
W	1.6	1.4	.5	.3	.1	.0	.0					3.9	5.6
WNW	1.4	1.1	.4	.2	.0	.0						3.2	5.1
NW	1.0	.7	.2	.2	.0							2.1	4.6
NNW	.9	.6	.2	.0								1.7	3.8
VARBL	.9	.2	.0									1.1	2.9
CALM												66.5	
	11.7	12.0	6.4	2.6	.5	.2	.0					100.0	1.9

TOTAL NUMBER OF OBSERVATIONS 4889

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART D CEILING VERSUS VISIBILITY

This summary is a bivariate percentage frequency distribution by classes of ceiling from zero to equal to or greater than 20,000 feet and as a separate class "no ceiling", versus visibility in 16 classes from zero to equal to or greater than 10 miles. Data are derived from hourly observations, and three sets of tables are presented as follows:

1. Annual - all years and all hours combined
2. By month - all years and all hours combined
3. By month - by standard 3-hour groups

Due to the cumulative nature of this presentation, it is possible to determine the percentage frequency of occurrence for any given limit of ceiling or visibility separately, or in combination of ceiling and visibility. The totals progress to the right and downward. Ceiling may be determined independently by referring to totals in the extreme right hand column. Also, visibility may be determined independently by reference to the horizontal row of totals at the bottom of the page. The percentage frequency for which the station was meeting or exceeding any given set of minima may be determined from the figure at the intersection of the appropriate ceiling column and visibility row. Several examples in the use of these tables are shown on pages 2 and 3 below.

D

U. S. Weather Bureau and Navy stations did not report ceilings within the range 10,000 feet and higher prior to January 1949. Summaries prepared from data for these stations using the earlier period and data subsequent to January 1949 will be modified to limit ceilings to 10,000 feet. Short periods of record prior to 1949 for these stations will be eliminated from the summary. For Air Force stations, the "no ceiling" category includes clear and scattered conditions, and ceilings above 20,000 feet for period through June 1948. Beginning in July 1948 for Air Force stations and January 1949 for USWB and U. S. Navy stations the "no ceiling" category consists of observations with less than 6/10 total sky cover and those cases where total sky cover is 6/10 or more, but not more than 1/2 of the sky cover is opaque.

Beginning in January 1968, METAR stations report visibilities to 6 miles and then greater than 6 miles. Thus, for METAR stations, the category equal to or greater than 10 miles is not printed in the tables, unless the summary was for a period ending before January 1968.

Continued on Reverse Side

EXAMPLES FOR USE OF CEILING VERSUS VISIBILITY TABLES IN THIS TABULATION

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥ 10	≥ 6	≥ 5	≥ 4	≥ 3	≥ 2½	≥ 2	≥ 1½	≥ 1¼	≥ 1	≥ ¾	≥ ⅝	≥ ½	≥ 5/16	≥ ¼	≥ 0
NO CEILING																
≥ 1800																
≥ 1500					91.0											92.6
≥ 1200																
≥ 1000																
≥ 900																
≥ 800																
≥ 700																
≥ 600																
≥ 500										97.4						98.1
≥ 400																
≥ 300																
≥ 200																
≥ 100																
≥ 0					95.4		96.9			98.3						100.0

EXAMPLE # 1 Read ceiling values independently of visibility under column at right headed ≥ 0. For instance, from the table: Ceiling ≥ 1500 feet = 92.6%.
Ceiling ≥ 500 feet = 98.1%.

EXAMPLE # 2 Read visibilities independently of ceilings on bottom line opposite ≥ 0. From the table:
Visibility ≥ 3 miles = 95.4%.
Visibility ≥ 2 miles = 96.9%.
Visibility ≥ 1 mile = 98.3%.

EXAMPLE # 3 To obtain combinations of ceiling with visibility, read figure at intersection of the two categories; i.e.: Ceiling ≥ 1500 feet with visibility ≥ 3 miles = 91.0%.

ADDITIONAL EXAMPLES

EXAMPLE # 4 Values below minimums stated in the table may be obtained by subtracting the value given in the table from 100%.
Thus, to obtain the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles, subtract the value read from the table at the intersection, which is 91.0, from 100.0. The answer 9.0 is the percentage of observations with ceiling < 1500 feet and/or visibility < 3 miles.

Likewise, the percentage of observations with ceiling < 500 feet and/or visibility < 1 mile is 2.6, obtained by subtracting 97.4 from 100.0.

EXAMPLE # 5 To find the percentage of observations falling within the two categories given in example above, subtract the value read from the table for the first set of limits from the value in the table for the second set of limits. The difference will be the percentage of observations meeting the lower set of limits, but not meeting the higher set of limits.

The value 91.0 read from the table at the intersection of $\geq$ 1500 feet with $\geq$ 3 miles, subtracted from 97.4 read from the table at the intersection of $\geq$ 500 feet with $\geq$ 1 mile is equal to 6.4%. Thus; 6.4 percent of the observations meet the criteria: "ceiling $\geq$ 500 feet with visibility $\geq$ 1 mile, but < 3 miles; or ceiling $\geq$ 500 feet, but < 1500 feet with visibility $\geq$ 1 mile."

Since these tabulations are prepared in several ways including by month, by 3-hour groups it is possible to determine diurnal variations of ceiling and visibility limits as well as probabilities of various ceiling-visibility combinations.

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] SERVICE/MAC

CEILING VERSUS VISIBILITY

1 [illegible] STATION NAME [illegible] YEARS JA[illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (L.S.T.)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥5/16	≥¼	0
NO CEILING		67.3	68.6	68.7	7 .1	7 .1	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 20000		71.4	71.9	72.0	73.3	73.3	74.3	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 18000		72.9	74.7	74.8	76.2	76.2	77.3	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 16000		72.4	74.7	74.8	76.2	76.2	77.3	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 14000		73.5	75.2	75.4	76.7	76.7	77.8	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 12000		73.6	75.4	75.5	76.9	76.9	77.9	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 10000		75.1	77.1	77.4	78.8	78.8	80.0	80.2	80.2	8 .2	8 .2	8 .2	8 .2	8 .2	8 .2	8 .2
≥ 9000		75.1	77.3	77.4	78.9	78.8	80.0	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2
≥ 8000		76.	78.3	78.5	8 .0	8 .0	81.2	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5
≥ 7000		76.2	78.5	78.6	8 .1	8 .1	81.3	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7	81.7
≥ 6000		76.6	76.9	79.0	80.5	80.5	81.7	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 5000		76.7	79.	79.2	8 .6	8 .6	81.9	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3
≥ 4500		76.7	79.	79.2	8 .6	8 .6	81.9	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3
≥ 4000		7 .2	8 .5	8 .6	82.1	82.1	83.5	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
≥ 3500		77.1	81.5	81.5	83.1	83.1	84.4	84.8	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 3000		85.3	88.4	88.5	91.2	91.2	93.1	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 2500		86.3	89.4	89.6	92.4	92.6	94.5	95.0	95.0	95.0	95.0	95.0	95.0	95.	95.	95.
≥ 2000		86.3	9 .3	9 .7	93.6	93.8	95.9	96.5	96.9	96.9	96.9	96.9	96.9	97.2	97.2	97.2
≥ 1800		86.3	90.3	90.7	93.6	93.9	96.1	96.6	97.	97.	97.	97.	97.	97.3	97.3	97.
≥ 1500		86.7	90.3	91.2	94.5	94.6	96.8	97.3	97.7	97.7	97.7	97.7	97.7	98.2	98.2	98.2
≥ 1200		86.7	9 .8	91.2	94.5	94.6	96.8	97.3	97.7	97.7	97.7	97.7	97.7	98.2	98.2	98.2
≥ 1000		86.7	9 .8	91.2	94.5	94.6	96.8	97.3	97.7	97.7	97.7	97.7	97.7	98.2	98.2	98.2
≥ 900		86.7	90.4	91.2	94.5	94.6	97.0	97.6	98.1	98.1	98.1	98.1	98.1	98.6	98.6	98.6
≥ 800		86.7	90.5	91.2	94.5	94.6	97.0	97.6	98.1	98.1	98.1	98.1	98.1	98.6	98.6	98.6
≥ 700		86.7	9 .9	91.2	94.5	94.6	97.0	97.8	98.4	98.4	98.4	98.4	98.9	98.9	98.9	98.9
≥ 600		86.7	9 .9	91.2	94.5	94.6	97.	98.0	98.5	98.5	98.5	98.5	99.1	99.1	99.1	99.1
≥ 500		86.7	91.8	91.2	94.5	94.9	97.3	98.4	98.9	98.9	98.9	98.9	99.5	99.5	99.5	99.5
≥ 400		86.7	90.2	91.2	94.5	95.0	97.4	98.5	99.1	99.1	99.1	99.1	99.6	99.6	99.6	99.6
≥ 300		86.9	9 .9	91.3	94.6	95.1	97.6	98.8	99.3	99.3	99.3	99.3	99.9	99.9	99.9	99.9
≥ 200		86.9	9 .9	91.3	94.6	95.1	97.6	98.8	99.5	99.5	99.5	99.5	100.0	100.0	100.0	100.0
≥ 100		86.9	9 .9	91.3	94.6	95.1	97.6	98.8	99.5	99.5	99.5	99.5	100.0	100.0	100.0	100.
≥ 0		86.9	9 .9	91.3	94.6	95.1	97.6	98.8	99.5	99.5	99.5	99.5	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
...HER SERVICE/MAC

CEILING VERSUS VISIBILITY

1...	...AFB, A...	5...-7..,74-5...	J...
STATION	STATION NAME	YEARS	MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

... - ...
HOURS (L.S.T.)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		64.3	67.	68.3	71.6	71.6	72.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
≥ 20000		67.2	71.	71.3	74.6	74.6	75.7	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6
≥ 18000		71.4	74.4	74.4	77.1	78.4	79.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 16000		71.4	74.4	74.4	77.1	78.4	79.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 14000		71.5	74.5	74.5	76.2	78.5	79.7	80.6	80.7	80.6	80.7	80.6	80.6	80.6	81.6	81.6
≥ 12000		71.7	74.6	74.6	78.4	78.6	79.8	80.7	80.7	80.7	80.7	80.7	80.7	80.7	82.7	82.7
≥ 10000		72.2	76.5	76.5	80.2	80.5	81.7	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 9000		72.2	76.5	76.5	80.2	80.5	81.7	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 8000		73.2	77.6	77.6	81.3	81.5	82.7	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8
≥ 7000		73.3	77.7	77.7	81.4	81.7	82.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
≥ 6000		73.4	77.8	77.8	81.7	81.9	83.1	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2	84.2
≥ 5000		73.5	77.9	77.9	82.2	82.5	83.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
≥ 4500		74.	78.6	78.6	82.3	82.6	83.8	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 4000		75.2	79.9	79.8	83.5	83.8	85.	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1
≥ 3500		75.8	80.5	80.6	84.3	84.6	85.8	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9
≥ 3000		81.7	87.3	87.4	92.8	93.1	94.4	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 2500		82.1	88.	88.3	93.9	94.2	95.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 2000		82.2	88.3	88.7	94.7	95.1	96.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 1800		82.2	88.3	88.8	95.1	95.4	96.9	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1500		82.6	88.7	89.2	95.4	95.8	97.3	98.5	98.8	98.8	98.8	98.9	98.9	99.1	99.2	99.2
≥ 1200		82.6	88.7	89.2	95.4	95.8	97.3	98.5	98.8	98.8	98.8	98.9	98.9	99.1	99.3	99.5
≥ 1000		82.6	88.7	89.2	95.4	95.8	97.3	98.5	98.8	98.8	98.8	98.9	98.9	99.1	99.3	99.5
≥ 900		82.6	88.7	89.2	95.4	95.8	97.3	98.5	98.8	98.8	98.8	98.9	98.9	99.1	99.3	99.5
≥ 800		82.6	88.7	89.2	95.4	95.8	97.6	98.8	99.1	99.1	99.2	99.2	99.3	99.6	99.7	99.7
≥ 700		82.7	88.8	89.4	95.5	95.9	97.7	98.9	99.2	99.2	99.3	99.3	99.5	99.7	99.9	99.9
≥ 600		82.7	88.8	89.4	95.5	95.9	97.7	99.1	99.3	99.3	99.5	99.5	99.6	99.9	100.0	100.
≥ 500		82.7	88.8	89.4	95.5	95.9	97.7	99.1	99.3	99.3	99.5	99.5	99.6	99.9	100.0	100.
≥ 400		82.7	88.8	89.4	95.5	95.9	97.7	99.1	99.3	99.3	99.5	99.5	99.6	99.9	100.0	100.0
≥ 300		82.7	88.8	89.4	95.5	95.9	97.7	99.1	99.3	99.3	99.5	99.5	99.6	99.9	100.0	100.
≥ 200		82.7	88.8	89.4	95.5	95.9	97.7	99.1	99.3	99.3	99.5	99.5	99.6	99.9	100.0	100.
≥ 100		82.7	88.8	89.4	95.5	95.9	97.7	99.1	99.3	99.3	99.5	99.5	99.6	99.9	100.0	100.
≥ 0		82.7	88.8	89.4	95.5	95.9	97.7	99.1	99.3	99.3	99.5	99.5	99.6	99.9	100.0	100.

TOTAL NUMBER OF OBSERVATIONS ...

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1... (STATION) ...ASCU A... K... (STATION NAME) 69-7..,74-81 (YEARS) JA... (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...-...PST (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		54.5	6 .6	61..	67.2	67.5	69.4	7..7	7..9	71.4	71.5	71.5	71.5	71.5	71.5	71.5
≥ 20000		56..	63.3	63.6	7 .2	7..5	72.6	73.9	74..	74.7	74.5	74..	74.8	74.8	74.8	74.8
≥ 18000		59.6	6..5	66.9	73.9	74.1	76.2	77.8	78..	78.6	78.7	78.7	78.7	78.7	78.7	78.7
≥ 16000		59.6	66.5	66.9	73.9	74.1	76.2	77.8	78..	78.6	78.7	78.7	78.7	78.7	78.7	78.7
≥ 14000		6..9	66.9	67.3	74.3	74.5	76.6	78.2	78.3	79..	79.1	79.1	79.1	79.1	79.1	79.1
≥ 12000		6..1	67.3	67.7	74.7	75.1	77.2	78.7	78.9	79.5	79.7	79.7	79.7	79.7	79.7	79.7
≥ 10000		67.2	69.9	70.3	77.3	77.7	79.8	81.4	81.6	82.3	82.4	82.4	82.4	82.4	82.4	82.4
≥ 9000		68.2	69.9	70.3	77.3	77.7	79.8	81.4	81.6	82.3	82.4	82.4	82.4	82.4	82.4	82.4
≥ 8000		63.6	71.5	71.9	79..	79.4	81.5	83.1	83.3	84.0	84.1	84.1	84.1	84.1	84.1	84.1
≥ 7000		63.8	71.8	72.2	79.3	79.8	81.9	83.5	83.7	84.4	84.5	84.5	84.5	84.5	84.5	84.5
≥ 6000		64.3	72.0	72.4	79.5	8..1	82.2	83.7	84..	84.6	84.8	84.8	84.8	84.8	84.8	84.8
≥ 5000		64.3	72.3	72.7	79.8	8..3	82.4	84.0	84.3	84.9	85..	85.0	85.0	85.0	85..	85..
≥ 4500		64.6	72.6	73.0	80.1	80.7	82.8	84.4	84.6	85.3	85.4	85.4	85.4	85.4	85.4	85.4
≥ 4000		65.0	73.2	73.6	81.1	81.8	83.9	85.4	85.7	86.4	86.5	86.5	86.5	86.5	86.5	86.5
≥ 3500		65.4	73.6	74..	81.5	82.2	84.3	85.8	86.1	86.7	86.9	86.9	86.9	86.9	86.9	86.9
≥ 3000		69.6	76.1	78.5	87.3	88.1	90.3	92.3	92.5	93.2	93.4	93.4	93.6	93.6	93.6	93.6
≥ 2500		7 .1	78.7	79.1	88.5	89.2	91.7	93.7	94.0	94.8	95.0	95.0	95.1	95.1	95.1	95.1
≥ 2000		7 .9	79.7	8 .1	89.6	9..4	93.2	95.4	95.7	96.7	97.0	97.0	97.1	97.1	97.1	97.1
≥ 1800		70.9	79.7	8 .1	89.6	90.4	93.2	95.4	95.8	96.9	97.1	97.1	97.4	97.4	97.4	97.4
≥ 1500		71.3	80.2	80.6	90.2	90.9	93.7	95.9	96.3	97.4	97.8	97.9	98.2	98.3	98.3	98.4
≥ 1200		71.3	80.2	80.6	90.2	90.9	93.7	95.9	96.3	97.4	97.8	97.9	98.2	98.3	98.3	98.4
≥ 1000		71.3	8 .2	80.6	9..3	91.1	93.8	96.1	96.5	97.5	97.9	98.0	98.3	98.4	98.4	98.6
≥ 900		71.3	8 .2	80.6	9..3	91.1	93.8	96.1	96.5	97.5	97.9	98.0	98.3	98.4	98.4	98.6
≥ 800		71.3	80.2	80.6	90.3	91.1	93.8	96.1	96.5	97.5	97.9	98..	98.3	98.4	98.4	98.6
≥ 700		71.3	80.2	80.6	90.3	91.1	93.8	96.1	96.5	97.5	97.9	98..	98.3	98.4	98.4	98.6
≥ 600		71.3	8 .2	80.6	9..3	91.1	94.0	96.2	96.6	97.6	98.0	98.2	98.4	98.6	98.7	98.8
≥ 500		71.3	8 .2	80.6	9..3	91.1	94.3	96.2	96.6	97.6	98.2	98.3	98.6	98.7	98.8	99..
≥ 400		71.3	80.2	80.6	9 .3	91.2	94.4	96.6	97..	98.0	98.6	98.7	99.0	99.1	99.2	99.3
≥ 300		71.3	80.2	80.7	90.6	91.5	94.6	97.0	97.4	98.4	99..	99.1	99.3	99.5	99.6	99.9
≥ 200		71.3	8 .2	80.7	90.6	91.5	94.6	97.0	97.4	98.4	99.0	99.1	99.3	99.5	99.6	99.9
≥ 100		71.3	8 .2	8 .7	9..6	91.5	94.6	97.0	97.4	98.4	99.0	99.1	99.3	99.5	99.6	99.9
≥ 0		71.3	8 .2	80.7	9..6	91.5	94.6	97.0	97.4	98.4	99..	99.1	99.3	99.5	99.6	100..

TOTAL NUMBER OF OBSERVATIONS ...

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) [illegible] A, AK (STATION NAME) 69-70,74-81 (YEARS) JAN (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0001-1100 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		41.8	47.5	48.3	53.9	55.4	59.3	62.1	62.7	63.6	64.9	65.3	65.4	65.4	65.4	65.4
≥ 20000		45.6	51.6	52.5	58.5	60.3	64.2	67.2	67.7	68.7	70.3	70.3	70.7	70.7	70.7	70.7
≥ 18000		47.9	54.4	55.4	62.3	63.9	68.4	71.6	72.2	73.8	75.4	75.7	76.1	76.1	76.1	76.1
≥ 16000		47.9	54.5	55.5	62.4	64.0	68.5	71.6	72.3	73.9	75.6	75.8	76.3	76.3	76.3	76.3
≥ 14000		48.1	54.9	55.9	63.1	64.7	69.2	72.6	73.1	74.8	76.4	76.7	77.1	77.1	77.1	77.1
≥ 12000		48.3	55.1	57.1	64.7	66.4	71.0	74.9	75.6	77.3	79.0	79.2	79.6	79.6	79.6	79.6
≥ 10000		48.7	56.9	57.9	66.2	67.8	72.5	76.4	77.1	79.0	80.6	80.9	81.3	81.3	81.3	81.3
≥ 9000		48.7	56.9	57.9	66.2	67.8	72.5	76.4	77.1	79.0	80.6	80.9	81.3	81.3	81.3	81.3
≥ 8000		48.3	57.8	58.9	68.1	69.9	74.5	78.4	79.1	81.0	82.6	82.9	83.3	83.3	83.3	83.3
≥ 7000		48.5	57.9	59.2	68.4	70.3	75.0	79.1	79.8	81.7	83.3	83.6	84.0	84.0	84.0	84.0
≥ 6000		50.6	58.1	59.3	68.5	70.4	75.2	79.2	79.9	81.8	83.4	83.7	84.1	84.1	84.1	84.1
≥ 5000		50.9	58.3	59.6	69.1	71.1	75.8	80.1	80.7	82.6	84.3	84.5	84.9	84.9	84.9	84.9
≥ 4500		50.9	58.3	59.6	69.1	71.1	75.8	80.1	80.7	82.6	84.3	84.5	84.9	84.9	84.9	84.9
≥ 4000		51.7	58.3	60.5	70.7	72.2	77.2	81.4	82.1	84.0	85.6	85.9	86.3	86.3	86.3	86.3
≥ 3500		51.7	59.8	61.5	70.1	72.3	77.3	81.7	82.4	84.3	85.9	86.2	86.6	86.6	86.6	86.6
≥ 3000		54.1	62.7	63.9	74.6	76.9	82.4	87.1	87.8	89.7	91.7	92.0	92.7	92.8	92.9	92.9
≥ 2500		54.4	63.2	64.6	75.7	78.4	84.0	88.7	89.4	91.5	93.6	93.9	94.6	94.7	94.7	94.7
≥ 2000		54.7	63.6	65.4	76.7	79.5	85.1	90.1	90.8	92.8	95.1	95.4	96.1	96.2	96.2	96.2
≥ 1800		54.7	63.8	65.4	76.7	79.5	85.1	90.2	90.9	92.9	95.4	95.7	96.3	96.5	96.5	96.5
≥ 1500		55.2	64.3	65.9	77.2	80.1	85.6	90.8	91.5	93.5	96.3	96.6	97.3	97.4	97.6	97.6
≥ 1200		55.4	64.5	66.1	77.3	80.2	85.8	90.9	91.6	93.6	96.5	96.7	97.4	97.6	97.7	97.7
≥ 1000		55.4	64.5	66.1	77.3	80.2	85.8	90.9	91.6	93.6	96.6	96.9	97.6	97.7	97.8	97.8
≥ 900		55.4	64.5	66.1	77.3	80.2	85.9	91.0	91.7	93.8	96.7	97.0	97.7	97.8	98.0	98.0
≥ 800		55.4	64.5	66.1	77.3	80.2	85.9	91.0	91.9	93.9	96.9	97.2	98.2	98.4	98.5	98.5
≥ 700		55.4	64.5	66.1	77.3	80.2	85.9	91.0	91.9	93.9	96.9	97.2	98.2	98.4	98.5	98.5
≥ 600		55.4	64.5	66.1	77.3	80.2	85.9	91.0	91.9	93.9	96.9	97.2	98.2	98.4	98.5	98.5
≥ 500		55.4	64.5	66.2	77.5	80.3	86.2	91.3	92.1	94.2	97.3	97.6	98.6	98.8	98.9	98.9
≥ 400		55.4	64.5	66.2	77.7	80.6	86.4	91.6	92.4	94.4	97.6	97.8	98.9	99.1	99.2	99.2
≥ 300		55.4	64.5	66.2	77.7	80.6	86.4	91.6	92.4	94.4	97.6	97.8	98.9	99.2	99.3	99.3
≥ 200		55.4	64.5	66.2	77.7	80.6	86.4	91.6	92.4	94.4	97.6	97.8	98.9	99.2	99.3	99.3
≥ 100		55.4	64.5	66.2	77.9	80.7	86.6	91.7	92.5	94.6	97.7	98.0	99.1	99.3	99.5	99.7
≥ 0		55.4	64.5	66.2	77.9	80.7	86.6	91.7	92.5	94.6	97.7	98.0	99.1	99.3	99.5	100.0

TOTAL NUMBER OF OBSERVATIONS 737

USAF ETAC FORM NO. 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | TAEGU AB, KO STATION NAME | 69-73, 74-81 YEARS | JAN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 HOURS (ST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		59.9	61.9	61.6	6 .4	66.4	67.4	69.0	69.1	69.7	69.9	69.9	69.9	69.9	69.9	[illegible]
≥ 20000		63.	65.4	65.7	66.5	70.7	71.8	73.5	73.8	74.3	74.6	74.6	74.6	74.6	74.6	74.6
≥ 18000		65.9	69.4	69.	73.7	74.2	75.3	77.1	77.9	78.2	78.5	78.5	78.5	78.5	78.5	78.9
≥ 16000		66.9	69.4	69.	73.1	74.3	75.4	77.5	77.7	78.3	78.6	78.6	78.6	78.6	78.6	78.6
≥ 14000		66.2	69.7	69.3	73.4	74.6	75.7	77.5	78.1	78.7	79.	79.	79.	79.	79.0	79.1
≥ 12000		66.6	69.4	69.9	74.3	75.7	76.7	78.6	79.3	79.9	80.2	80.2	80.2	80.2	80.2	80.2
≥ 10000		66.8	69.8	70.5	75.1	76.5	77.7	79.5	80.3	81.	81.3	81.3	81.3	81.3	81.3	81.3
≥ 9000		66.8	69.8	70.5	75.1	76.5	77.7	79.5	80.3	81.	81.3	81.3	81.3	81.3	81.3	81.3
≥ 8000		67.3	71.0	71.7	76.6	77.9	79.1	81.0	81.8	82.5	82.8	82.8	82.8	82.	82.8	82.8
≥ 7000		68.3	71.4	72.5	77.4	78.9	80.3	82.2	83.	83.7	84.	84.	84.2	84.	84.2	84.
≥ 6000		68.3	71.5	72.6	77.7	79.1	80.6	82.5	83.3	84.0	84.2	84.2	84.2	84.2	84.2	84.2
≥ 5000		69.1	72.5	73.5	78.6	80.2	81.7	83.6	84.4	85.2	85.4	85.4	85.4	85.4	85.4	85.4
≥ 4500		69.3	72.7	73.8	79.9	80.5	82.0	83.8	84.6	85.4	85.7	85.7	85.7	85.7	85.7	85.7
≥ 4000		70.1	73.5	74.6	79.7	81.3	83.0	84.9	85.	86.5	86.8	86.8	86.8	86.	86.8	86.8
≥ 3500		70.2	73.8	74.9	79.9	81.6	83.3	85.2	86.	86.8	87.0	87.0	87.0	87.	87.0	87.
≥ 3000		73.9	77.7	78.7	84.6	86.4	88.2	90.5	91.4	92.2	92.9	92.9	92.9	92.9	92.9	92.
≥ 2500		74.5	78.3	79.5	85.7	87.4	89.4	92.0	93.	94.3	94.9	94.9	94.9	94.9	94.9	94.9
≥ 2000		74.9	78.	80.2	86.6	88.4	90.5	93.4	94.7	95.7	96.4	96.4	96.4	96.4	96.4	96.4
≥ 1800		74.9	79.	81.5	87.3	89.8	91.9	94.9	95.1	96.1	96.8	96.8	96.8	96.8	96.8	96.8
≥ 1500		75.0	79.4	80.9	87.7	89.4	91.7	94.8	96.	97.2	97.9	97.9	97.9	97.9	97.9	97.9
≥ 1200		75.0	79.4	80.9	88.1	89.8	92.1	95.2	96.4	97.7	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1000		75.0	79.4	80.9	88.1	89.8	92.1	95.2	96.4	97.7	98.5	98.5	98.5	98.5	98.5	98.5
≥ 900		75.0	79.4	80.9	88.1	89.8	92.1	95.2	96.4	97.7	98.5	98.5	98.5	98.5	98.5	98.5
≥ 800		75.0	79.4	81.0	88.2	90.0	92.2	95.5	96.7	98.1	98.9	99.1	99.1	99.1	99.1	99.1
≥ 700		75.0	79.4	81.0	88.2	90.0	92.2	95.5	96.7	98.1	98.9	99.1	99.1	99.1	99.1	99.1
≥ 600		75.0	79.4	81.0	88.2	90.0	92.2	95.5	96.7	98.1	99.1	99.2	99.3	99.3	99.3	99.3
≥ 500		75.0	79.5	81.1	88.4	90.1	92.4	95.6	96.8	98.3	99.2	99.3	99.6	99.6	99.6	99.6
≥ 400		75.0	79.5	81.1	88.4	90.1	92.4	95.6	96.8	98.3	99.2	99.3	99.6	99.6	99.6	99.6
≥ 300		75.0	79.5	81.1	88.4	90.1	92.4	95.6	96.8	98.3	99.2	99.3	99.6	99.6	99.6	99.6
≥ 200		75.0	79.5	81.1	88.5	90.2	92.5	95.7	96.9	98.4	99.3	99.5	99.7	99.7	99.7	99.7
≥ 100		75.0	79.5	81.1	88.5	90.2	92.5	95.7	96.9	98.5	99.6	99.7	100.0	100.0	100.0	100.
≥ 0		75.0	79.5	81.1	88.5	90.2	92.5	95.7	96.9	98.5	99.6	99.7	100.0	100.0	100.0	100.

TOTAL NUMBER OF OBSERVATIONS 748

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-73,74-81 YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		64.6	65.3	65.4	66.1	66.3	66.6	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7
≥ 20000		69.6	70.8	71.2	71.8	72.1	72.4	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 18000		73.6	74.7	75.1	75.8	76.3	76.8	77.0	77.0	77.2	77.2	77.2	77.2	77.2	77.2	77.2
≥ 16000		73.7	75.	75.4	76.1	76.6	77.1	77.2	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5
≥ 14000		74.5	75.8	76.2	77.0	77.5	78.0	78.2	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 12000		75.1	76.4	76.8	77.6	78.2	78.7	78.8	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1
≥ 10000		76.1	77.6	78.0	78.9	79.5	80.0	80.1	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 9000		76.1	77.6	78.0	78.9	79.6	80.1	80.3	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 8000		77.2	78.5	78.9	81.4	82.1	82.6	82.8	83.0	83.0	83.0	83.0	83.0	83.0	83.0	83.0
≥ 7000		78.0	80.3	80.7	82.2	82.9	83.4	83.8	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1
≥ 6000		78.3	80.7	81.2	82.8	83.4	83.9	84.3	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 5000		78.9	81.3	81.8	83.6	84.2	84.7	85.1	85.5	85.5	85.5	85.5	85.5	85.5	85.5	85.5
≥ 4500		79.2	81.6	82.1	83.8	84.5	85.0	85.4	85.8	85.8	85.8	85.8	85.8	85.8	85.8	85.8
≥ 4000		81.1	83.4	83.9	85.8	86.4	87.0	87.4	87.6	87.8	87.8	87.8	87.9	87.8	87.8	87.8
≥ 3500		81.6	83.9	84.5	86.3	87.0	87.5	87.9	88.3	88.3	88.3	88.3	88.3	88.3	88.3	88.3
≥ 3000		83.5	85.3	85.8	87.9	88.7	89.2	89.6	90.2	90.3	90.3	90.3	90.3	90.3	90.3	90.3
≥ 2500		85.9	88.7	89.2	91.3	92.1	92.8	93.2	93.5	93.8	93.9	93.9	93.9	93.9	93.9	93.9
≥ 2000		86.7	89.5	90.8	93.2	93.9	94.6	95.1	95.5	95.8	95.9	95.9	96.1	96.1	96.1	96.1
≥ 1800		86.7	89.5	90.8	93.2	93.9	94.6	95.3	95.7	95.9	96.1	96.1	96.2	96.2	96.2	96.2
≥ 1500		86.7	89.5	90.8	93.7	94.5	95.3	96.4	96.8	97.4	97.5	97.5	97.6	97.6	97.6	97.6
≥ 1200		86.7	89.5	90.8	93.7	94.6	95.4	96.6	97.	97.6	97.8	97.8	98.1	98.1	98.1	98.1
≥ 1000		86.7	89.5	90.8	93.7	94.6	95.4	96.6	97.1	97.6	97.9	97.9	98.2	98.2	98.2	98.2
≥ 900		86.7	89.5	90.8	93.7	94.6	95.5	96.7	97.1	97.8	98.1	98.1	98.3	98.3	98.3	98.3
≥ 800		86.7	89.5	90.8	93.7	94.6	95.5	96.7	97.1	97.8	98.1	98.1	98.3	98.3	98.3	98.3
≥ 700		86.7	89.5	90.8	93.7	94.6	95.5	96.8	97.2	97.9	98.2	98.3	98.6	98.6	98.6	98.6
≥ 600		86.7	89.5	90.8	93.7	94.6	95.5	96.8	97.2	97.9	98.3	98.4	98.7	98.7	98.7	98.7
≥ 500		86.7	89.5	90.8	93.8	94.7	95.8	97.1	97.5	98.2	98.7	98.9	99.5	99.5	99.5	99.5
≥ 400		86.7	89.5	90.8	93.8	94.7	95.8	97.1	97.5	98.2	98.7	98.9	99.5	99.5	99.5	99.5
≥ 300		86.7	89.5	90.8	93.8	94.7	95.8	97.1	97.5	98.2	98.7	98.9	99.5	99.5	99.5	99.5
≥ 200		86.8	89.4	90.9	94.1	95.0	96.1	97.5	97.9	98.6	99.1	99.3	99.9	99.9	99.9	99.9
≥ 100		86.8	89.4	90.9	94.1	95.1	96.1	97.5	97.9	98.6	99.1	99.3	99.9	99.9	100.0	100.0
≥ 0		86.8	89.4	90.9	94.1	95.0	96.1	97.5	97.9	98.6	99.1	99.3	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 76

...AL CLIMATOLOGY BRANCH
...ETAC
A... ...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

... | ... | 69-73,74-81 | JAN
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

... HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		64.2	64.3	65.3	66.2	66.4	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 20000		68.5	68.7	69.7	70.6	70.7	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1
≥ 18000		72.3	73.4	73.4	74.3	74.6	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9
≥ 16000		72.3	73.4	73.4	74.3	74.6	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9	74.9
≥ 14000		72.4	73.6	73.6	74.7	74.9	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 12000		72.9	74.3	74.3	75.2	75.4	76.0	76.0	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 10000		73.5	75.6	75.8	76.7	77.0	77.5	77.9	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 9000		73.5	75.6	75.8	76.7	77.0	77.5	77.9	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 8000		74.9	77.0	77.2	78.5	78.8	79.3	79.7	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 7000		76.1	78.1	78.4	79.7	79.9	80.4	80.8	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 6000		76.3	78.4	78.6	79.9	80.2	80.7	81.1	81.3	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 5000		76.9	79.0	79.3	80.7	80.9	81.5	81.8	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 4500		76.9	79.0	79.3	80.7	80.9	81.5	81.8	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 4000		77.7	80.6	80.8	82.4	82.6	83.4	83.8	84.1	84.1	84.1	84.1	84.1	84.1	84.1	84.1
≥ 3500		77.9	80.7	80.9	82.5	82.7	83.5	83.9	84.3	84.3	84.3	84.3	84.3	84.3	84.3	84.3
≥ 3000		83.5	87.1	87.3	89.4	89.9	90.9	91.3	91.7	91.7	91.7	91.7	91.7	91.7	91.7	91.7
≥ 2500		84.4	88.5	88.7	90.8	91.3	92.3	93.4	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7
≥ 2000		85.2	89.8	90.2	92.6	93.1	94.1	95.1	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 1800		85.4	90.0	90.4	93.1	93.6	94.6	95.8	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 1500		85.5	90.3	90.7	93.7	94.2	95.8	97.1	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 1200		85.5	90.3	90.7	93.7	94.2	95.8	97.1	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 1000		85.7	90.4	90.8	93.9	94.4	95.9	97.2	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 900		85.7	90.4	90.8	93.9	94.4	96.3	97.6	98.0	98.0	98.0	98.0	98.0	98.0	98.1	98.1
≥ 800		85.7	90.4	90.8	93.9	94.4	96.3	97.6	98.0	98.1	98.1	98.1	98.1	98.1	98.5	98.5
≥ 700		85.7	90.4	90.8	93.9	94.4	96.3	97.6	98.0	98.1	98.2	98.2	98.2	98.2	98.6	98.6
≥ 600		85.7	90.4	90.8	93.9	94.4	96.3	97.6	98.0	98.1	98.5	98.5	98.5	98.5	98.8	98.8
≥ 500		85.7	90.4	90.8	93.9	94.8	96.7	98.1	98.6	98.7	99.1	99.1	99.1	99.1	99.5	99.5
≥ 400		85.7	90.4	90.8	93.9	94.8	96.7	98.1	98.6	98.7	99.1	99.1	99.1	99.1	99.5	99.5
≥ 300		85.7	90.4	90.8	93.9	94.8	96.7	98.1	98.6	98.7	99.1	99.1	99.1	99.1	99.5	99.6
≥ 200		85.7	90.5	90.9	94.0	94.9	96.8	98.2	98.7	98.8	99.2	99.2	99.2	99.2	99.6	99.9
≥ 100		85.7	90.5	90.9	94.1	95.0	96.9	98.3	98.8	99.0	99.4	99.4	99.4	99.4	99.7	100.0
≥ 0		85.7	90.5	90.9	94.1	95.0	96.9	98.3	98.8	99.0	99.4	99.4	99.4	99.4	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 782

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 [illegible] STATION | TALGO AB KD STATION NAME | 69-70, 74-81 YEARS | JAN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		61.9	64.1	64.8	64.8	64.8	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.2
≥ 20000		68.1	68.2	68.2	69.0	69.0	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4
≥ 18000		69.1	71.4	71.4	72.2	72.2	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 16000		69.1	71.4	71.4	72.2	72.2	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 14000		70.3	72.3	72.3	73.1	73.1	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 12000		70.3	72.6	72.6	73.3	73.3	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 10000		71.3	73.7	73.7	74.5	74.7	75.1	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 9000		71.3	73.7	73.7	74.5	74.7	75.1	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 8000		73.0	75.4	75.4	76.1	76.4	76.8	77.0	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2
≥ 7000		74.2	76.7	76.7	77.4	77.7	78.1	78.4	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6
≥ 6000		74.6	77.0	77.0	77.8	78.1	78.4	78.8	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0
≥ 5000		75.1	77.6	77.6	78.3	78.6	79.0	79.3	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 4500		75.1	77.7	77.7	78.4	78.7	79.1	79.5	79.6	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 4000		76.5	79.1	79.1	80.0	80.2	81.0	81.4	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5
≥ 3500		77.9	79.6	79.7	80.6	80.9	81.6	82.0	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 3000		85.2	88.9	89.0	90.3	90.6	91.6	92.0	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
≥ 2500		86.9	90.7	90.8	92.1	92.5	93.5	94.4	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5
≥ 2000		87.2	91.6	91.8	93.5	94.0	95.4	96.3	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 1800		87.2	91.6	91.8	93.6	94.3	95.7	96.6	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1500		87.5	91.8	92.1	94.4	95.0	96.6	97.4	97.9	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1200		87.5	91.8	92.2	94.5	95.2	96.7	97.6	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 1000		87.5	91.8	92.2	94.5	95.2	96.7	97.6	98.0	98.0	98.1	98.1	98.1	98.1	98.1	98.1
≥ 900		87.5	91.8	92.2	94.5	95.2	96.8	97.7	98.1	98.1	98.2	98.2	98.2	98.2	98.2	98.2
≥ 800		87.5	91.8	92.2	94.5	95.2	96.8	97.8	98.2	98.2	98.3	98.3	98.3	98.3	98.3	98.3
≥ 700		87.5	91.8	92.2	94.5	95.2	96.8	97.8	98.2	98.2	98.3	98.3	98.3	98.3	98.3	98.3
≥ 600		87.5	91.8	92.2	94.5	95.2	96.8	98.0	98.3	98.3	98.5	98.5	98.5	98.5	98.5	98.5
≥ 500		87.5	91.8	92.2	94.6	95.4	97.1	98.2	98.6	98.9	99.5	99.5	99.6	99.6	99.6	99.6
≥ 400		87.5	91.8	92.2	94.6	95.4	97.1	98.2	98.6	99.0	99.6	99.6	99.9	99.9	99.9	99.9
≥ 300		87.5	91.8	92.2	94.6	95.4	97.1	98.2	98.6	99.0	99.6	99.6	99.9	99.9	99.9	99.9
≥ 200		87.6	92.1	92.3	94.8	95.5	97.2	98.3	98.7	99.1	99.7	99.7	100.0	100.0	100.0	100.0
≥ 100		87.6	92.1	92.3	94.8	95.5	97.2	98.3	98.7	99.1	99.7	99.7	100.0	100.0	100.0	100.0
≥ 0		87.6	92.1	92.3	94.8	95.5	97.2	98.3	98.7	99.1	99.7	99.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 784

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

L PAL CLIMATOLOGY BRANCH
AFETAC
WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | TAEGU A: KO STATION NAME | 69-73,74-81 YEARS | JAN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		59.8	62.7	62.9	65.7	66.1	67.3	68.1	68.2	69.5	69.7	68.7	68.8	68.8	68.8	68.8
≥ 20000		63.5	66.5	66.8	69.7	70.1	71.4	72.3	72.4	72.7	72.9	72.9	73.1	73.1	73.2	73.2
≥ 18000		66.5	69.8	70.1	73.2	73.6	75.1	76.1	76.3	76.6	76.9	76.9	77.0	77.0	77.0	77.0
≥ 16000		66.6	69.9	70.2	73.3	73.6	75.2	76.2	76.3	76.7	76.9	77.0	77.1	77.1	77.2	77.2
≥ 14000		67.0	70.3	70.6	73.8	74.3	75.7	76.7	76.9	77.3	77.5	77.5	77.6	77.6	77.6	77.6
≥ 12000		67.4	70.8	71.1	74.4	75.0	76.4	77.4	77.7	78.1	78.3	78.3	78.4	78.4	78.4	78.4
≥ 10000		69.4	72.2	72.6	76.0	76.6	78.0	79.2	79.4	79.8	80.1	80.1	80.2	80.2	80.2	80.2
≥ 9000		65.4	72.2	72.6	76.0	76.6	78.0	79.2	79.5	79.9	80.1	80.1	80.2	80.2	80.2	80.2
≥ 8000		69.6	73.6	73.9	77.7	78.3	79.7	80.9	81.2	81.6	81.8	81.9	81.9	81.9	81.9	81.9
≥ 7000		70.1	74.1	74.5	78.3	78.9	80.4	81.7	82.0	82.4	82.6	82.7	82.7	82.7	82.7	82.7
≥ 6000		71.4	74.4	74.8	78.6	79.2	80.7	82.0	82.3	82.7	82.9	83.1	83.0	83.0	83.0	83.0
≥ 5000		71.8	74.9	75.3	79.1	79.8	81.3	82.6	82.9	83.3	83.6	83.6	83.7	83.7	83.7	83.7
≥ 4500		72.9	75.8	75.5	79.3	80.0	81.5	82.8	83.1	83.5	83.7	83.8	83.8	83.8	83.8	83.8
≥ 4000		72.9	76.3	76.7	80.6	81.3	83.0	84.3	84.6	85.0	85.3	85.3	85.3	85.3	85.3	85.3
≥ 3500		72.4	76.7	77.1	81.1	81.8	83.5	84.8	85.1	85.5	85.8	85.8	85.8	85.8	85.8	85.8
≥ 3000		77.5	82.4	82.9	87.7	88.5	90.4	91.9	92.2	92.6	93.1	93.1	93.1	93.1	93.1	93.1
≥ 2500		78.2	83.3	83.8	88.9	89.8	91.7	93.4	93.8	94.3	94.7	94.7	94.8	94.8	94.8	94.8
≥ 2000		78.6	84.2	84.8	90.1	91.1	93.2	95.0	95.5	96.0	96.5	96.5	96.7	96.7	96.7	96.7
≥ 1800		78.7	84.2	84.9	90.3	91.3	93.4	95.3	95.8	96.3	96.8	96.8	97.0	97.0	97.0	97.0
≥ 1500		78.9	84.6	85.3	90.9	91.9	94.1	96.1	96.6	97.2	97.7	97.7	97.9	98.0	98.0	98.1
≥ 1200		79.0	84.6	85.3	91.0	92.0	94.2	96.2	96.7	97.3	97.8	97.9	98.1	98.2	98.2	98.2
≥ 1000		79.0	84.6	85.3	91.0	92.0	94.3	96.2	96.7	97.3	97.9	98.0	98.2	98.3	98.3	98.3
≥ 900		79.1	84.6	85.3	91.0	92.0	94.4	96.3	96	97.5	98.1	98.1	98.3	98.4	98.5	98.5
≥ 800		79.3	84.6	85.3	91.0	92.0	94.4	96.4	96.9	97.6	98.2	98.3	98.5	98.6	98.7	98.7
≥ 700		79.3	84.6	85.4	91.0	92.0	94.5	96.5	97.0	97.7	98.3	98.4	98.6	98.7	98.8	98.8
≥ 600		79.3	84.6	85.4	91.0	92.0	94.5	96.5	97.1	97.7	98.4	98.5	98.8	98.8	98.9	99.0
≥ 500		79.3	84.6	85.4	91.1	92.2	94.7	96.8	97.3	98.0	98.8	98.9	99.3	99.3	99.4	99.4
≥ 400		79.3	84.6	85.4	91.1	92.3	94.8	96.9	97.4	98.1	98.9	99.0	99.4	99.5	99.6	99.6
≥ 300		79.0	84.7	85.4	91.2	92.3	94.8	96.9	97.5	98.2	99.0	99.1	99.5	99.6	99.7	99.7
≥ 200		79.0	84.7	85.5	91.3	92.4	94.9	97.0	97.6	98.3	99.1	99.2	99.6	99.7	99.8	99.9
≥ 100		79.0	84.7	85.5	91.3	92.4	94.9	97.1	97.7	98.4	99.2	99.3	99.7	99.7	99.9	100.0
≥ 0		79.0	84.7	85.5	91.3	92.4	94.9	97.1	97.7	98.4	99.2	99.3	99.7	99.7	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 5465

USAF ETAC FORM NO. 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] AP KJ STATION NAME | 69-[illegible],74-81 YEARS | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-1200 HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		64.4	6[illegible]	6[illegible]	62.2	62.2	62.8	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4
≥ 20000		63.4	63.7	63.7	65.3	65.3	65.9	66.5	66.5	66.5	66.5	66.5	66.5	66.5	66.5	66.5
≥ 18000		66.8	67.5	66.4	7[illegible].6	7[illegible].6	71.2	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 16000		67.3	68.1	69.[illegible]	71.2	71.2	71.7	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 14000		67.9	68.7	69.5	71.7	71.7	72.3	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 12000		66.2	69.[illegible]	69.8	72.[illegible]	72.3	72.6	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2
≥ 10000		71.3	72.0	72.9	75.1	75.1	75.7	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 9000		71.3	72.0	72.9	75.1	75.1	75.7	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 8000		73.9	74.7	75.5	78.2	78.2	78.8	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4
≥ 7000		75.1	75.[illegible]	75.7	79.6	79.6	80.2	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 6000		75.1	75.[illegible]	76.7	79.6	79.6	80.2	80.8	80.8	8[illegible].8	8[illegible].6	8[illegible].8	8[illegible].8	8[illegible].8	8[illegible].6	8[illegible].8
≥ 5000		75.3	76.[illegible]	76.9	79.8	79.8	80.4	81.0	81.0	81.0	81.[illegible]	81.[illegible]	81.[illegible]	81.[illegible]	81.[illegible]	81.[illegible]
≥ 4500		75.3	76.[illegible]	76.9	79.8	79.8	80.4	81.0	81.[illegible]	81.0	81.[illegible]	81.[illegible]	81.[illegible]	81.[illegible]	81.[illegible]	81.[illegible]
≥ 4000		76.4	77.2	78.[illegible]	81.1	81.1	81.7	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3
≥ 3500		77.0	77.7	78.6	82.1	82.1	82.7	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3
≥ 3000		83.6	84.8	85.8	89.6	89.6	90.2	91.2	91.2	91.4	91.4	91.4	91.4	91.4	91.4	91.4
≥ 2500		85.5	87.[illegible]	89.2	93.3	93.4	94.1	95.2	95.2	95.3	95.3	95.3	95.3	95.3	95.[illegible]	95.3
≥ 2000		87.1	89.3	90.9	95.5	95.8	96.5	97.5	97.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 1800		87.3	89.5	91.1	95.8	96.[illegible]	96.8	97.8	97.8	98.[illegible]	98.[illegible]	98.0	98.[illegible]	98.[illegible]	98.[illegible]	98.[illegible]
≥ 1500		87.7	89.9	91.5	96.2	96.6	97.5	98.5	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1200		87.7	89.9	91.5	96.2	96.6	97.8	98.8	98.8	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]
≥ 1000		87.7	89.9	91.[illegible]	96.2	96.6	97.8	98.8	98.8	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]
≥ 900		87.7	89.9	91.5	96.2	96.6	97.8	98.8	98.8	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]
≥ 800		87.7	89.9	91.5	96.6	97.2	98.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		87.7	89.9	91.5	96.6	97.2	98.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600		87.7	89.9	91.5	96.9	97.5	98.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		87.7	89.9	91.5	96.9	97.5	98.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		87.7	89.9	91.5	96.9	97.5	98.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		87.7	89.9	91.5	96.9	97.5	98.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		87.7	89.9	91.5	96.9	97.7	98.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		87.7	89.9	91.5	96.9	97.7	98.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		87.7	89.9	91.5	96.9	97.7	98.8	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible]853

USAF ETAC FORM NOV 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] AK STATION NAME | 69-72,74-81 YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥ 5/16	≥ 0	
NO CEILING		5[illegible].3	5[illegible].4	59.2	61.[illegible]	61.6	61.9	61.9	61.9	62.5	62.5	62.5	62.5	62.5	62.[illegible]
≥ 20000		6[illegible].2	62.4	63.[illegible]	65.6	65.6	65.8	65.8	65.9	66.4	66.4	66.4	66.4	66.4	[illegible].6
≥ 18000		63.2	63.7	66.4	69.9	69.9	7[illegible].2	70.2	70.[illegible]	70.8	70.8	70.8	70.8	70.8	70.[illegible]
≥ 16000		63.5	66.[illegible]	66.7	7[illegible].3	7[illegible].3	70.6	70.6	70.6	71.2	71.2	71.2	71.2	71.2	71.[illegible]
≥ 14000		63.8	66.8	67.[illegible]	70.6	70.6	70.9	70.9	70.9	71.5	71.5	71.5	71.5	71.5	71.5
≥ 12000		64.4	67.[illegible]	67.7	71.5	71.5	71.8	71.8	71.8	72.4	72.4	72.4	72.4	72.[illegible]	72.4
≥ 10000		66.[illegible]	6[illegible].9	69.6	73.4	73.4	73.7	73.7	73.7	74.3	74.3	74.3	74.3	74.3	74.3
≥ 9000		66.5	68.9	69.6	73.4	73.4	73.7	73.7	73.7	74.3	74.3	74.3	74.3	74.3	74.3
≥ 8000		68.[illegible]	70.9	71.7	75.6	75.6	75.9	75.9	75.9	76.5	76.5	76.5	76.5	76.5	76.5
≥ 7000		69.3	72.8	73.5	77.5	77.5	77.8	77.8	77.9	78.3	78.3	78.3	78.3	78.3	78.3
≥ 6000		69.3	73.0	73.7	77.8	77.8	78.1	78.1	78.1	78.6	78.6	78.6	78.6	78.6	78.8
≥ 5000		6[illegible].3	73.1	73.8	77.9	78.2	78.5	78.5	78.5	79.1	79.1	79.1	79.1	79.1	79.[illegible]
≥ 4500		69.3	73.1	73.8	77.9	78.2	78.5	78.5	78.5	79.1	79.1	79.1	79.1	79.1	79.2
≥ 4000		7[illegible].1	74.[illegible]	74.7	78.8	79.1	79.4	79.4	79.4	79.9	79.9	79.9	79.9	79.9	8[illegible].1
≥ 3500		7[illegible].5	74.4	75.1	79.5	79.8	8[illegible].1	80.1	80.1	80.7	80.7	80.7	80.7	80.7	8[illegible].[illegible]
≥ 3000		77.[illegible]	8[illegible].3	83.[illegible]	87.9	88.2	88.5	89.1	89.1	89.8	89.8	89.8	89.8	89.8	9[illegible].[illegible]
≥ 2500		8[illegible].1	85.8	86.5	91.7	92.[illegible]	92.3	93.[illegible]	93.[illegible]	93.8	93.8	93.8	93.8	93.[illegible]	93.9
≥ 2000		[illegible]0.8	87.6	89.1	94.8	95.3	95.8	96.5	96.5	97.2	97.2	97.[illegible]	97.2	97.[illegible]	97.4
≥ 1800		8[illegible].8	87.6	89.4	95.3	95.9	96.4	97.1	97.1	97.8	97.8	97.8	97.8	97.8	98.[illegible]
≥ 1500		3[illegible].8	87.6	89.5	95.6	96.2	96.7	97.4	97.4	98.1	98.1	98.1	98.1	98.1	98.3
≥ 1200		8[illegible].8	87.6	89.5	95.6	96.2	96.8	97.5	97.5	98.3	98.3	98.3	98.3	98.3	98.4
≥ 1000		9[illegible].8	87.6	89.5	95.6	96.2	96.8	97.7	97.7	98.4	98.4	98.4	98.4	98.4	98.5
≥ 900		81.[illegible]	87.8	89.7	95.8	96.4	96.9	97.8	97.8	98.5	98.5	98.5	98.5	98.5	98.7
≥ 800		81.3	88.4	9[illegible].3	96.4	96.9	97.5	98.4	98.4	99.1	99.1	99.1	99.1	99.1	99.3
≥ 700		81.3	88.4	90.3	96.7	97.4	98.0	98.8	98.8	99.6	99.6	99.6	99.6	99.6	99.7
≥ 600		81.3	88.4	91.3	96.7	97.4	98.0	98.8	98.8	99.6	99.6	99.6	99.6	99.6	99.7
≥ 500		81.3	88.4	9[illegible].3	96.7	97.4	98.0	98.8	98.8	99.7	99.7	99.7	99.7	99.7	99.9
≥ 400		81.3	88.4	90.3	96.7	97.4	98.0	98.8	98.8	99.7	99.7	99.7	99.7	99.7	99.9
≥ 300		81.3	88.4	90.3	96.7	97.4	98.[illegible]	98.8	98.8	99.7	99.7	99.7	99.7	99.7	99.9
≥ 200		81.3	88.4	90.3	96.7	97.4	98.0	98.8	98.8	99.7	99.7	99.7	99.7	99.7	99.9
≥ 100		81.3	88.4	90.3	96.7	97.4	98.0	98.8	98.8	99.7	99.7	99.7	99.7	99.7	99.9
≥ 0		81.4	88.5	90.4	96.8	97.5	98.1	99.0	99.0	99.9	99.9	99.9	99.9	99.9	99.9[illegible]

TOTAL NUMBER OF OBSERVATIONS 6[illegible]9

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) [illegible] AB KS (STATION NAME) 69-73, 74-81 (YEARS) FEB (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-1800 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	
NO CEILING		49.6	57.3	59.6	57.7	58.3	60.1	60.6	60.8	61.3	61.3	61.3	61.4	61.4	61.4	61.4
≥ 20000		54.3	59.5	59.3	63.4	64.0	66.0	66.8	67.0	67.4	67.4	67.4	67.5	67.5	67.5	67.5
≥ 18000		55.6	61.3	62.[illegible]	66.7	67.4	69.4	70.2	70.4	70.8	70.8	70.8	70.9	70.9	70.9	70.9
≥ 16000		56.7	61.4	62.1	66.8	67.5	69.5	70.4	70.5	70.9	70.9	70.9	71.1	71.1	71.1	71.1
≥ 14000		57.[illegible]	61.7	62.4	67.1	67.8	69.8	70.7	70.8	71.2	71.[illegible]	71.2	71.4	71.4	71.4	71.4
≥ 12000		57.1	61.8	62.5	67.2	68.2	70.2	71.1	71.2	71.8	71.8	71.9	71.9	71.9	71.9	71.9
≥ 10000		58.7	63.3	64.5	69.8	70.8	72.9	73.8	74.1	74.6	74.6	74.6	74.8	74.8	74.8	74.8
≥ 9000		58.7	63.5	64.5	69.8	70.8	72.9	73.8	74.1	74.6	74.6	74.6	74.8	74.8	74.8	74.8
≥ 8000		59.8	65.5	66.2	71.9	72.9	75.1	75.9	76.2	76.8	76.8	76.8	76.9	76.9	76.9	76.9
≥ 7000		60.7	66.5	67.4	73.4	74.4	76.5	77.4	77.6	78.2	78.2	78.2	78.3	78.3	78.3	78.3
≥ 6000		[illegible].7	66.7	67.5	73.5	74.5	76.6	77.5	77.8	78.3	78.3	78.3	78.5	78.5	78.5	78.5
≥ 5000		[illegible].7	66.7	67.5	73.5	74.6	76.8	77.6	77.9	78.5	78.5	78.5	78.6	78.6	78.6	78.6
≥ 4500		[illegible].8	66.9	67.7	73.6	74.8	76.9	77.8	78.1	78.6	78.6	78.6	78.8	78.8	78.8	78.8
≥ 4000		61.5	67.7	68.5	74.5	75.6	77.8	78.6	78.9	79.5	79.5	79.5	79.6	79.6	79.6	79.6
≥ 3500		61.8	67.9	68.8	74.9	75.9	78.1	78.9	79.2	79.8	79.8	79.8	79.9	79.9	79.9	79.9
≥ 3000		63.2	74.9	75.8	82.9	84.3	86.3	87.3	87.9	88.5	88.5	88.5	88.6	88.6	88.6	88.7
≥ 2500		73.4	77.5	78.3	86.1	87.2	89.5	90.6	91.2	91.7	91.7	91.7	91.9	91.9	91.9	92.0
≥ 2000		73.8	78.9	80.1	88.2	89.6	92.5	93.9	94.4	95.0	95.2	95.[illegible]	95.2	95.2	95.2	95.3
≥ 1800		73.8	78.9	80.1	88.3	89.7	92.6	94.0	94.6	95.2	95.2	95.2	95.3	95.3	95.3	95.4
≥ 1500		74.1	79.3	81.1	89.6	91.0	93.9	95.3	95.9	96.4	96.4	96.4	96.6	96.6	96.6	96.7
≥ 1200		74.2	79.5	81.2	89.9	91.3	94.2	95.6	96.2	96.7	96.9	96.9	97.3	97.3	97.3	97.4
≥ 1000		74.4	79.6	81.3	90.0	91.5	94.3	95.9	96.4	97.3	97.4	97.4	97.9	97.9	97.9	98.0
≥ 900		74.5	79.8	81.5	90.2	91.6	94.4	96.0	96.6	97.4	97.6	97.6	98.[illegible]	98.[illegible]	98.[illegible]	98.1
≥ 800		74.7	80.1	81.9	90.9	92.3	95.2	96.7	97.3	98.1	98.3	98.3	98.7	98.7	98.7	98.8
≥ 700		74.7	80.1	81.9	91.0	92.5	95.3	96.9	97.4	98.3	98.4	98.4	99.[illegible]	99.[illegible]	99.0	99.1
≥ 600		74.7	80.1	81.9	91.0	92.5	95.3	96.9	97.4	98.3	98.4	98.4	99.2	99.[illegible]	99.2	99.1
≥ 500		74.7	80.1	81.9	91.0	92.5	95.4	97.0	97.6	98.4	98.7	98.7	99.3	99.3	99.3	99.4
≥ 400		74.7	80.1	81.9	91.0	92.5	95.4	97.2	97.7	98.6	98.9	98.9	99.4	99.4	99.4	99.5
≥ 300		74.7	80.1	81.9	91.2	92.6	95.6	97.3	97.9	98.7	99.1	99.1	99.7	99.7	99.7	99.8
≥ 200		74.7	80.1	81.9	91.2	92.6	95.6	97.3	97.9	98.7	99.1	99.1	99.7	99.7	99.7	99.9
≥ 100		74.7	8[illegible].1	81.9	91.2	92.6	95.6	97.3	97.9	98.7	99.1	99.1	99.7	99.7	99.7	[illegible].0
≥ 0		74.7	8[illegible].1	81.9	91.2	92.6	95.6	97.3	97.9	98.7	99.1	99.1	99.7	99.7	99.7	[illegible].0

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
...WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 | TAEGU AB, KO | 69-73,74-81 | FEB
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0600-1200
HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		39.7	41.8	41.5	47.4	47.8	49.7	52.0	52.	53.5	53.8	53.6	53.9	53.9	53.9	53.9
≥ 20000		42.	46.9	43.	54.4	55.0	57.0	59.3	60.1	60.9	61.2	61.2	61.4	61.4	61.4	61.4
≥ 18000		44.5	48.7	51.7	57.9	59.5	61.7	64.1	65.0	66.0	66.5	66.5	66.6	66.6	66.6	66.6
≥ 16000		44.6	48.9	51.9	58.2	59.8	62.	64.4	65.7	66.3	66.8	66.8	66.9	66.9	66.9	66.9
≥ 14000		45.3	51.9	51.9	59.3	61.2	63.4	65.9	66.9	67.8	68.2	68.2	68.4	68.4	68.4	68.4
≥ 12000		45.2	51.9	52.4	60.5	62.4	64.6	67.1	67.9	69.1	69.5	69.5	69.7	69.7	69.7	69.7
≥ 10000		47.5	53.5	54.5	63.1	65.2	67.5	70.1	71.	72.2	72.6	72.6	72.7	72.7	72.7	72.7
≥ 9000		47.5	53.5	54.5	63.1	65.2	67.5	70.1	71.	72.2	72.6	72.6	72.7	72.7	72.7	72.7
≥ 8000		49.8	55.0	56.0	65.5	67.5	69.8	72.4	73.3	74.5	74.9	74.9	75.1	75.1	75.1	75.1
≥ 7000		49.1	55.2	56.3	65.9	67.9	70.3	72.9	73.9	74.9	75.4	75.4	75.5	75.5	75.5	75.5
≥ 6000		49.6	55.7	56.7	66.5	68.5	70.8	73.5	74.3	75.5	75.9	75.9	76.1	76.1	76.1	76.1
≥ 5000		49.7	55.7	56.9	67.1	69.1	71.4	74.1	74.9	76.1	76.5	76.5	76.7	76.7	76.7	76.7
≥ 4500		49.7	55.9	56.9	67.1	69.1	71.4	74.1	74.9	76.1	76.5	76.5	76.7	76.7	76.7	76.7
≥ 4000		50.7	56.9	57.9	68.4	70.6	73.0	75.7	76.5	77.7	78.1	78.1	78.3	78.3	78.3	78.3
≥ 3500		51.	57.1	58.2	69.8	71.	73.5	76.1	77.	78.1	78.6	78.6	78.7	78.7	78.7	78.7
≥ 3000		55.5	63.	64.	76.5	79.	81.9	85.4	86.4	87.6	88.	88.	88.2	88.2	88.2	88.2
≥ 2500		56.4	63.8	64.9	77.6	81.2	83.1	86.9	87.9	89.1	89.5	89.5	89.7	89.7	89.7	89.7
≥ 2000		56.4	64.1	65.2	78.6	81.5	84.5	88.6	89.7	91.8	91.4	91.4	91.5	91.5	91.5	91.5
≥ 1800		56.4	64.1	65.2	78.6	81.5	84.5	88.6	89.9	91.2	91.5	91.5	91.7	91.7	91.7	91.7
≥ 1500		57.1	65.2	66.3	80.2	83.1	86.3	90.7	92.	93.1	93.9	93.9	94.2	94.2	94.2	94.2
≥ 1200		57.6	65.6	66.9	80.8	83.7	86.9	91.4	92.7	93.9	94.9	94.9	95.5	95.6	95.6	95.6
≥ 1000		58.0	66.2	67.6	81.8	84.7	88.0	92.6	93.9	95.1	96.2	96.2	96.8	96.9	96.9	96.9
≥ 900		58.0	66.2	67.6	81.8	84.7	88.0	92.6	93.9	95.1	96.2	96.2	96.8	96.9	96.9	96.9
≥ 800		58.0	66.5	67.9	82.4	85.3	88.6	93.3	94.6	95.8	97.1	97.1	97.7	97.8	97.8	97.8
≥ 700		58.2	66.6	68.1	82.7	85.6	88.9	93.6	94.9	96.1	97.4	97.4	98.1	98.1	98.1	98.1
≥ 600		58.2	66.6	68.1	82.7	85.6	88.9	93.6	94.9	96.1	97.4	97.4	98.1	98.3	98.3	98.3
≥ 500		58.2	66.6	68.1	82.7	85.6	88.9	93.7	95.2	96.4	97.7	97.7	98.5	98.8	98.8	98.8
≥ 400		58.2	66.6	68.1	82.7	85.6	88.9	93.7	95.2	96.4	97.7	97.7	98.8	99.1	99.1	99.1
≥ 300		58.2	66.6	68.1	82.7	85.6	88.9	93.7	95.2	96.5	97.6	98.	99.1	99.4	99.4	99.4
≥ 200		58.2	66.6	68.1	82.7	85.6	88.9	93.7	95.2	96.5	97.8	98.	99.1	99.4	99.4	99.4
≥ 100		58.2	66.6	68.1	82.7	85.6	88.9	93.7	95.2	96.5	97.8	98.	99.1	99.4	99.4	99.4
≥ 0		58.3	66.8	68.2	82.9	85.9	89.2	94.0	95.5	96.8	98.1	98.3	99.4	99.7	99.7	100.

TOTAL NUMBER OF OBSERVATIONS 5[illegible]

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible] STATION NAME | 69-7[illegible], 74-[illegible] YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		47.9	5[illegible]	51.5	[illegible]6.4	53.9	54.8	55.1	55.1	55.2	55.2	55.2	55.2	55.2	55.2	[illegible]
≥ 20000		54.1	57.5	58.1	6[illegible].1	60.6	61.6	62.2	62.2	62.4	62.4	62.4	62.4	62.4	62.4	[illegible]
≥ 18000		5[illegible].8	6[illegible].5	63.1	65.2	66.[illegible]	67.[illegible]	67.6	67.[illegible]	67.8	67.8	67.8	67.8	67.8	67.8	67.8
≥ 16000		59.1	62.[illegible]	63.4	65.7	66.4	67.5	68.1	68.1	68.2	68.2	68.2	68.2	68.2	68.2	[illegible]
≥ 14000		5[illegible].7	6[illegible].6	64.5	66.[illegible]	67.6	68.7	69.4	69.6	69.7	69.7	69.7	69.7	69.7	69.7	69.7
≥ 12000		[illegible]0.3	64.2	[illegible]5.1	[illegible]7.6	68.4	69.4	7[illegible].1	7[illegible].3	7[illegible].4	7[illegible].4	7[illegible].4	7[illegible].4	7[illegible].4	7[illegible].4	7[illegible].4
≥ 10000		[illegible]2.4	67.[illegible]	67.9	7[illegible].7	71.6	72.7	73.4	73.6	73.7	73.7	73.7	73.7	73.7	73.7	7[illegible]
≥ 9000		[illegible]2.5	67.2	68.1	7[illegible].9	71.8	72.8	73.6	73.7	73.9	73.9	73.9	73.9	73.9	73.9	7[illegible]
≥ 8000		64.9	69.9	70.9	73.9	74.8	75.8	76.6	76.7	76.9	76.9	76.9	76.9	76.9	76.9	76.9
≥ 7000		[illegible]5.1	7[illegible].[illegible]	71.[illegible]	74.5	7[illegible].4	76.4	77.2	77.3	77.5	77.5	77.5	77.5	77.5	77.5	77.5
≥ 6000		[illegible]5.1	7[illegible].9	71.0	74.5	75.4	76.4	77.2	77.3	77.5	77.5	77.5	77.5	77.5	77.5	77.5
≥ 5000		[illegible]5.1	7[illegible].[illegible]	71.[illegible]	74.5	7[illegible].4	76.4	77.2	77.3	77.5	77.5	77.5	77.5	77.5	77.5	77.[illegible]
≥ 4500		[illegible]5.1	7[illegible].0	71.2	74.6	75.5	76.6	77.3	77.5	77.[illegible]	77.6	77.[illegible]	77.6	77.[illegible]	77.6	77.[illegible]
≥ 4000		67.3	72.4	73.6	77.6	78.5	79.6	80.3	80.4	[illegible].6	[illegible].6	[illegible].6	[illegible].6	[illegible]	[illegible].6	[illegible]
≥ 3500		67.5	72.5	73.7	77.[illegible]	78.7	79.7	80.4	[illegible]0.6	[illegible].7	80.7	[illegible].7	[illegible].7	[illegible].7	[illegible].7	[illegible]
≥ 3000		72.4	77.8	79.1	83.9	84.8	86.1	87.2	87.5	87.6	87.8	87.8	87.8	87.8	87.8	[illegible]
≥ 2500		74.3	79.7	81.0	[illegible]6.3	87.2	89.3	[illegible]0.0	[illegible]0.3	[illegible]0.4	[illegible]0.6	[illegible]0.6	[illegible].6	[illegible]	[illegible].6	[illegible]
≥ 2000		75.1	81.0	[illegible]2.7	[illegible]8.4	[illegible]9.3	[illegible]1.0	[illegible]2.4	[illegible]2.7	[illegible]2.8	[illegible]3.1	[illegible]3.1	[illegible]3.1	[illegible]3.1	[illegible]3.1	[illegible]
≥ 1800		75.4	[illegible]1.8	[illegible]3.1	[illegible]8.8	[illegible]9.7	[illegible]1.5	[illegible]2.8	[illegible]3.1	[illegible]3.3	[illegible]3.6	[illegible]3.6	[illegible]3.6	[illegible]3.6	[illegible]3.6	[illegible]
≥ 1500		76.1	[illegible]2.4	[illegible]4.3	[illegible]9.0	[illegible]1.0	[illegible]2.8	[illegible]4.6	[illegible]4.5	[illegible]5.2	[illegible]5.5	[illegible]5.5	[illegible]5.5	[illegible]5.5	[illegible]5.5	[illegible]
≥ 1200		76.6	[illegible]3.1	[illegible]4.8	[illegible]1.3	[illegible]2.4	[illegible]4.2	[illegible]6.0	[illegible]6.3	[illegible]6.7	[illegible]7.3	[illegible]7.3	[illegible]7.3	[illegible]7.3	[illegible]7.3	[illegible]
≥ 1000		77.0	[illegible]3.6	[illegible]5.2	[illegible]1.8	[illegible]2.8	[illegible]4.8	[illegible]6.7	[illegible]7.[illegible]	[illegible]7.5	[illegible]8.1	[illegible]8.1	[illegible]8.1	[illegible]8.[illegible]	[illegible]8.1	[illegible]
≥ 900		77.[illegible]	[illegible]3.6	[illegible]5.2	[illegible]1.8	[illegible]2.8	[illegible]4.8	[illegible]6.7	[illegible]7.[illegible]	[illegible]7.5	[illegible]8.1	[illegible]8.1	[illegible]8.1	[illegible]8.[illegible]	[illegible]8.1	[illegible]
≥ 800		77.0	[illegible]3.7	[illegible]5.4	[illegible]2.1	[illegible]3.1	[illegible]5.1	[illegible]7.0	[illegible]7.3	[illegible]7.9	[illegible]8.5	[illegible]8.5	[illegible]8.7	[illegible]8.7	[illegible]8.7	[illegible]
≥ 700		77.[illegible]	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.8	[illegible]8.8	[illegible]9.[illegible]	[illegible]9.[illegible]	[illegible]9.[illegible]	[illegible]
≥ 600		77.[illegible]	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.8	[illegible]8.8	[illegible]9.3	[illegible]9.3	[illegible]9.3	[illegible]
≥ 500		77.0	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.8	[illegible]8.8	[illegible]9.3	[illegible]9.3	[illegible]9.3	[illegible]
≥ 400		77.0	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.5	[illegible]8.8	[illegible]9.6	[illegible]9.7	[illegible]9.7	[illegible]
≥ 300		77.0	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.8	[illegible]8.8	[illegible]9.6	[illegible]9.7	[illegible]9.7	[illegible]
≥ 200		77.0	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.8	[illegible]9.[illegible]	[illegible]9.7	[illegible]9.[illegible]	[illegible]9.[illegible]	[illegible]
≥ 100		77.0	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.6	[illegible]9.[illegible]	[illegible]9.7	[illegible]9.[illegible]	[illegible]9.[illegible]	[illegible]
≥ 0		77.0	[illegible]3.7	[illegible]5.4	[illegible]2.4	[illegible]3.4	[illegible]5.4	[illegible]7.3	[illegible]7.6	[illegible]8.2	[illegible]8.8	[illegible]9.[illegible]	[illegible]9.7	[illegible]9.7	[illegible]9.[illegible]	[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]6[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

... STATION ... STATION NAME 69-7..,74-81 YEARS FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...-17... HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		54.1	55.1	55.1	55.4	55.4	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6	55.6
≥ 20000		62.1	63.2	63.2	63.5	63.5	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6	63.6
≥ 18000		69.9	70.7	70.7	71.1	71.1	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 16000		69.8	71.6	71.6	72.0	72.0	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 14000		71.8	72.7	72.7	73.2	73.2	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 12000		71.6	73.6	73.6	74.0	74.0	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2
≥ 10000		73.6	76.0	76.0	76.5	76.5	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7
≥ 9000		73.6	76.0	76.0	76.5	76.5	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7	76.7
≥ 8000		75.4	77.9	78.2	78.7	78.7	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9
≥ 7000		76.4	78.9	79.3	80.2	80.2	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 6000		75.4	78.9	79.3	80.2	80.2	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	81.4
≥ 5000		77.4	78.9	80.4	81.2	81.2	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4
≥ 4500		77.6	80.1	80.5	81.4	81.4	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5	82.1
≥ 4000		81.6	83.1	83.6	84.5	84.5	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 3500		82	83.3	83.7	84.6	84.6	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 3000		83.6	86.7	87.1	88.6	88.6	88.7	88.7	88.7	88.7	88.7	88.9	88.9	88.9	88.9	88.9
≥ 2500		86.1	89.6	90.2	92.2	92.2	92.5	92.8	92.8	92.8	93.0	93.1	93.1	93.1	93.1	93.
≥ 2000		85.7	91.5	91.1	93.4	93.4	93.8	94.1	94.3	94.3	94.4	94.4	94.4	94.4	94.4	94.4
≥ 1800		87.4	91.2	91.9	94.6	94.6	95.2	95.3	95.5	95.6	95.7	95.7	95.7	95.7	95.7	95.7
≥ 1500		87.7	91.6	92.4	95.0	95.0	95.5	95.7	95.9	96.0	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1200		98.1	92.2	93.1	95.9	95.9	96.3	96.8	96.9	97.1	97.9	97.9	97.9	97.9	97.9	97.9
≥ 1000		88.3	92.7	93.4	96.9	97.2	97.7	98.2	98.4	98.5	99.4	99.4	99.4	99.4	99.4	99.4
≥ 900		88.3	92.7	93.4	96.9	97.2	97.7	98.2	98.4	98.5	99.4	99.4	99.4	99.4	99.4	99.4
≥ 800		88.3	92.7	93.4	96.9	97.2	97.7	98.2	98.4	98.5	99.4	99.4	99.4	99.4	99.4	99.4
≥ 700		88.3	92.7	93.4	96.9	97.2	97.7	98.2	98.4	98.5	99.4	99.4	99.4	99.4	99.4	99.4
≥ 600		88.3	92.7	93.4	96.9	97.4	97.8	98.4	98.5	98.7	99.6	99.6	99.7	99.7	99.7	99.7
≥ 500		88.3	92.7	93.4	96.9	97.4	97.8	98.4	98.5	98.7	99.6	99.6	99.7	99.7	99.7	99.7
≥ 400		88.3	92.7	93.4	96.9	97.5	97.9	98.5	98.7	98.8	99.7	99.7	99.9	99.9	99.9	99.9
≥ 300		88.3	92.7	93.4	96.9	97.5	97.9	98.5	98.7	98.8	99.7	99.7	99.9	99.9	99.9	99.9
≥ 200		88.3	92.7	93.4	97.1	97.7	98.1	98.7	98.8	99.0	99.9	99.9	100.0	100.0	100.0	100.
≥ 100		88.3	92.7	93.4	97.1	97.7	98.1	98.7	98.8	99.0	99.9	99.9	100.0	100.0	100.0	100.
≥ 0		88.3	92.7	93.4	97.1	97.7	98.1	98.7	98.8	99.0	99.9	99.9	100.0	100.0	100.0	100.

TOTAL NUMBER OF OBSERVATIONS 68...

USAF ETAC FORM NO. 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] FAC
[illegible] ATR [illegible] SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-73, 74-81 YEARS | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS LST

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		54.4	55.2	55.4	56.5	56.5	56.5	56.9	56.9	56.9	56.9	56.5	56.5	56.6	56.6	56.6
≥ 20000		54.9	61.1	61.1	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.7	62.7	62.7	62.7
≥ 18000		65.9	67.6	67.7	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.5	69.5	69.5	69.5
≥ 16000		65.7	67.6	67.7	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.4	69.5	69.5	69.5	69.5
≥ 14000		66.9	68.7	68.8	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.2	70.2	70.2	70.2
≥ 12000		67.4	69.1	69.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.3	71.3	71.3	71.3
≥ 10000		72.8	73.7	73.9	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	75.1	75.1	75.1	75.1
≥ 9000		72.8	73.7	73.9	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	75.1	75.1	75.1	75.1
≥ 8000		73.1	74.7	74.8	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.3	77.3	77.3	77.3
≥ 7000		73.4	75.3	75.7	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.3	78.3	78.3	78.3
≥ 6000		73.4	75.5	75.7	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.3	78.3	78.5	78.5	78.5
≥ 5000		73.7	75.8	75.9	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.6	78.6	78.7	78.7	78.7
≥ 4500		73.7	75.8	75.9	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.6	78.6	78.7	78.7	78.7
≥ 4000		75.4	77.5	77.6	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.6	80.6	80.7	80.7	80.7
≥ 3500		75.8	77.9	78.0	80.8	80.8	80.8	80.8	80.8	81.0	81.0	81.1	81.1	81.1	81.1	81.1
≥ 3000		81.8	84.5	84.8	87.8	88.0	88.0	88.0	88.0	88.3	88.4	88.4	88.5	88.5	88.5	88.5
≥ 2500		83.9	87.1	87.3	91.2	91.3	91.5	91.9	91.9	92.3	92.4	92.4	92.6	92.6	92.6	92.6
≥ 2000		85.6	88.7	89.1	93.4	93.7	94.1	94.8	94.8	95.5	95.7	95.7	95.8	95.8	95.8	95.8
≥ 1800		86.1	89.1	89.5	93.8	94.1	94.5	95.2	95.2	95.9	96.1	96.1	96.2	96.2	96.2	96.2
≥ 1500		86.4	89.7	90.2	94.7	95.0	95.4	96.4	96.4	97.1	97.2	97.2	97.8	97.8	97.8	97.8
≥ 1200		87.1	90.3	90.9	95.7	95.9	96.5	97.5	97.5	98.2	98.6	98.6	99.2	99.2	99.2	99.2
≥ 1000		87.1	90.5	91.1	96.1	96.6	97.2	98.2	98.2	98.9	99.3	99.3	99.9	99.9	99.9	99.9
≥ 900		87.1	90.5	91.1	96.1	96.6	97.2	98.2	98.2	98.9	99.3	99.3	99.9	99.9	99.9	99.9
≥ 800		87.1	90.5	91.1	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 700		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 600		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 500		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 400		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 300		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 200		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 100		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0
≥ 0		87.1	90.5	91.0	96.2	96.8	97.3	98.3	98.3	99.0	99.4	99.4	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 725

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) IASCU AB KD (STATION NAME) 69-79,74-81 (YEARS) FEB (MONTH)

(HOURS)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		5 .6	6 .4	61.1	62.3	62.3	62.7	62.7	62.7	62.7	62.7	62.7	62.7	62.7	62.7	[illegible]
≥ 20000		65.	65.	65.9	67.1	67.1	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 18000		69.4	7 .6	71.4	73.4	73.4	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 16000		69.4	7 .6	71.4	73.4	73.4	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 14000		69.3	71.2	72.1	74.1	74.1	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 12000		69.1	71.6	72.4	74.4	74.4	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
≥ 10000		71.3	73.8	74.7	76.6	76.6	77.	77.3	77.3	77.	77.	77.	77.3	77.	77.3	77.
≥ 9000		71.3	73.8	74.7	76.6	76.6	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 8000		72.6	75.5	76.3	78.3	78.3	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7	78.7
≥ 7000		73.5	76.5	77.3	79.2	79.2	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7	79.7
≥ 6000		73.5	76.5	77.3	79.5	79.5	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 5000		73.8	76.7	77.6	79.8	79.8	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	[illegible]
≥ 4500		73.8	76.7	77.6	79.8	79.8	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	[illegible]
≥ 4000		74.0	76.9	77.7	79.9	79.9	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	[illegible]
≥ 3500		74.1	77.0	77.9	80.1	80.1	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	[illegible]
≥ 3000		81.9	85.9	86.9	89.7	89.8	90.3	90.4	90.4	90.7	90.7	90.7	90.7	90.7	90.7	[illegible]
≥ 2500		83.7	86.3	89.3	92.9	93.3	94.4	94.6	94.6	95.1	95.1	95.1	95.1	95.1	95.1	[illegible]
≥ 2000		95.4	9 .1	91.2	95.3	95.7	96.8	96.9	96.9	97.5	97.5	97.5	97.5	97.5	97.5	[illegible]
≥ 1800		85.5	91.4	91.5	95.8	96.2	97.4	97.5	97.5	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1500		85.9	9 .8	91.9	96.4	96.8	97.9	98.2	98.2	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1200		85.9	91.8	91.9	96.5	96.9	98.5	98.7	98.7	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1000		85.9	91.8	91.9	96.5	96.9	98.5	98.7	98.7	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 900		85.9	91.8	91.9	96.5	96.9	98.5	98.7	98.7	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 800		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 700		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 600		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100		85.9	9 .8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	100.0	100.0	100.0	100.0	100.0	[illegible]
≥ 0		85.9	91.8	91.9	96.9	97.5	99.0	99.3	99.3	99.9	100.0	100.0	100.0	100.0	100.0	[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-70,74-81 YEARS | FEB MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		[illegible]	54.3	54.8	57.1	57.3	58.0	58.5	58.6	58.9	58.9	58.9	58.9	58.9	58.9	[illegible]
≥ 20000		[illegible]	59.7	60.3	62.8	63.0	63.8	64.3	64.4	64.7	64.7	64.7	64.8	64.8	64.8	[illegible]
≥ 18000		61.7	64.5	65.1	68.1	68.4	69.3	69.8	69.9	70.2	70.3	70.3	70.3	70.3	70.3	[illegible]
≥ 16000		[illegible]	64.6	65.4	68.4	68.6	69.6	70.2	70.3	70.6	70.6	70.6	70.7	70.7	70.7	[illegible]
≥ 14000		[illegible]	69.4	66.1	69.1	69.6	70.4	71.0	71.1	71.4	71.4	71.4	71.5	71.5	71.5	[illegible]
≥ 12000		[illegible]	66.1	66.7	69.8	70.3	71.1	71.7	71.8	72.2	72.2	72.2	72.3	72.3	72.3	[illegible]
≥ 10000		66.2	68.5	69.2	72.5	73.0	73.9	74.5	74.7	75.1	75.1	75.1	75.1	75.1	75.1	[illegible]
≥ 9000		[illegible]	68.5	69.2	72.6	73.1	73.9	74.5	74.7	75.2	75.2	75.2	75.1	75.1	75.1	[illegible]
≥ 8000		67.0	70.5	71.2	74.9	75.4	76.3	76.9	77.1	77.3	77.4	77.4	77.5	77.5	77.5	[illegible]
≥ 7000		67.9	71.4	72.2	76.1	76.6	77.4	78.1	78.2	78.5	78.6	78.6	78.6	78.6	78.6	[illegible]
≥ 6000		67.9	71.5	72.3	76.2	76.7	77.6	78.2	78.4	78.7	78.7	78.7	78.8	78.8	78.9	[illegible]
≥ 5000		[illegible]	71.3	72.5	76.6	77.1	78.0	78.6	78.7	79.1	79.1	79.1	79.1	79.1	79.1	[illegible]
≥ 4500		[illegible]	71.8	72.6	76.6	77.1	78.0	78.6	78.8	79.1	79.1	79.1	79.2	79.2	79.2	[illegible]
≥ 4000		[illegible]	73.2	74.0	78.2	78.7	79.6	80.2	80.4	80.7	80.7	80.7	80.8	80.8	80.8	[illegible]
≥ 3500		[illegible]	73.5	74.3	78.6	79.1	80.0	80.6	80.8	81.1	81.2	81.2	81.2	81.2	81.2	[illegible]
≥ 3000		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 2500		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 2000		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1800		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1500		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1200		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 1000		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 900		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 800		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 700		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 600		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 500		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 400		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 300		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 200		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 100		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 0		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]

TOTAL NUMBER OF OBSERVATIONS 5549

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
...WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 | ...AEGO AB KY | 69-70,74-81 | MAR

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...0-...
HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		58.8	58.9	59.4	59.4	59.7	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8	59.8
≥ 20000		67.7	67.9	68.3	68.6	68.9	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1
≥ 18000		72.1	72.1	72.6	73.3	73.6	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 16000		72.1	72.3	72.7	73.5	73.8	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 14000		72.6	72.7	73.2	73.9	74.2	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 12000		74.1	74.2	74.7	75.5	75.8	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9
≥ 10000		78.5	78.6	79.1	80.0	80.3	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 9000		78.5	78.6	79.1	80.0	80.3	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 8000		81.2	81.4	81.8	82.7	83.0	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2	83.2
≥ 7000		81.4	81.8	82.3	83.2	83.5	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6
≥ 6000		82.3	82.7	83.2	84.1	84.4	84.5	84.5	84.5	84.5	84.5	84.5	84.5	84.5	84.5	84.5
≥ 5000		82.3	83.	83.5	84.4	84.7	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 4500		82.3	83.	83.5	84.4	84.7	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 4000		83.3	83.9	84.4	85.5	85.8	85.9	85.9	85.9	85.9	85.9	85.9	85.9	85.9	85.9	85.9
≥ 3500		83.8	84.7	85.2	86.2	86.5	86.7	86.7	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 3000		89.2	90.8	91.2	92.7	93.	93.2	93.2	93.5	93.5	93.5	93.5	93.5	93.5	93.5	93.5
≥ 2500		90.3	92.1	92.5	95.0	95.3	95.5	95.5	95.5	95.8	95.8	95.8	95.8	95.8	95.8	95.8
≥ 2000		91.1	93.2	93.8	97.3	97.7	98.0	98.0	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1800		91.1	93.2	93.8	97.4	97.9	98.2	98.2	99.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 1500		91.1	93.2	93.8	98.2	98.6	99.1	99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1200		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 1000		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 900		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 800		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 700		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 400		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 300		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 200		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 100		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 0		91.1	93.2	93.8	98.2	98.8	99.2	99.7	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.

TOTAL NUMBER OF OBSERVATIONS ...6...

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAF ETAC
[illegible] SERVICE/MAC

CEILING VERSUS VISIBILITY

1 [illegible] 69-73,74-81 MAR
STATION STATION NAME YEARS MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-16
HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		55.2	56.6	56.9	58.5	58.5	58.7	58.[illegible]	58.7	58.7	58.7	58.7	58.8	58.8	58.8	[illegible]
≥ 20000		64.3	66.4	66.7	68.8	68.8	69.[illegible]	68.9	68.9	68.9	68.9	68.9	69.1	69.1	69.1	69.1
≥ 18000		67.2	7[illegible].3	7[illegible].6	72.9	73.[illegible]	73.2	73.2	73.2	73.2	73.2	73.2	73.3	73.3	73.3	73.3
≥ 16000		68.2	7[illegible].3	7[illegible].6	72.9	73.[illegible]	73.2	73.2	73.2	73.2	73.2	73.2	73.3	73.3	73.3	73.3
≥ 14000		69.9	71.[illegible]	71.3	73.6	73.8	73.9	73.9	73.9	73.9	73.9	73.9	74.1	74.1	74.1	74.1
≥ 12000		69.5	71.8	72.1	74.5	74.7	74.8	74.8	74.8	74.8	74.8	74.8	75.0	75.[illegible]	75.[illegible]	75.[illegible]
≥ 10000		72.5	75.[illegible]	75.3	77.8	78.[illegible]	78.1	78.1	78.1	78.1	78.1	78.1	78.3	78.3	78.3	78.3
≥ 9000		72.5	75.0	75.3	77.8	78.0	78.1	78.1	78.1	78.1	78.1	78.1	78.3	78.3	78.3	78.3
≥ 8000		75.1	77.8	78.1	80.7	80.8	81.0	81.0	81.[illegible]	81.[illegible]	81.[illegible]	81.[illegible]	81.1	81.1	81.1	81.1
≥ 7000		75.6	78.3	78.6	81.1	81.3	81.4	81.4	81.4	81.4	81.4	81.4	81.6	81.6	81.6	81.6
≥ 6000		75.9	78.6	78.9	81.4	81.6	81.7	81.7	81.7	81.7	81.7	81.7	81.9	81.9	81.9	81.9
≥ 5000		76.3	79.2	79.5	82.1	82.2	82.4	82.4	82.4	82.4	82.4	82.4	82.5	82.5	82.5	82.5
≥ 4500		76.3	79.2	79.5	82.1	82.2	82.4	82.4	82.4	82.4	82.4	82.4	82.5	82.5	82.5	82.5
≥ 4000		78.3	81.1	81.7	84.3	84.5	84.6	84.6	84.6	84.6	84.6	84.6	84.8	84.8	84.8	84.8
≥ 3500		78.6	81.4	82.1	84.6	84.8	84.9	84.9	85.2	85.4	85.4	85.4	85.5	85.5	85.5	85.5
≥ 3000		84.8	88.6	89.4	92.8	92.9	93.1	93.1	93.4	93.5	93.5	93.5	93.7	93.7	93.7	93.7
≥ 2500		86.1	89.7	90.6	94.4	94.6	94.7	94.7	95.[illegible]	95.2	95.2	95.2	95.3	95.3	95.3	95.3
≥ 2000		86.3	9[illegible].5	91.9	96.4	96.7	97.0	97.0	97.3	97.4	97.4	97.4	97.6	97.6	97.6	97.6
≥ 1800		85.2	9[illegible].5	91.9	96.4	96.7	97.0	97.0	97.3	97.4	97.4	97.4	97.6	97.6	97.6	97.6
≥ 1500		85.2	9[illegible].5	91.9	96.8	97.1	97.6	97.6	97.9	98.0	98.0	98.0	98.2	98.2	98.2	98.2
≥ 1200		85.2	9[illegible].5	91.9	97.3	97.6	98.0	98.3	98.6	98.8	98.8	98.8	98.9	98.9	98.9	98.9
≥ 1000		85.2	9[illegible].5	91.9	97.3	97.6	98.[illegible]	98.3	98.6	98.8	98.8	98.8	98.9	98.9	98.9	98.9
≥ 900		85.2	9[illegible].5	91.9	97.3	97.6	98.[illegible]	98.3	98.6	98.8	98.8	98.8	98.9	98.9	98.9	98.9
≥ 800		85.2	9[illegible].5	91.9	97.3	97.6	98.0	98.3	98.6	98.8	98.8	98.8	98.9	98.9	98.9	98.9
≥ 700		85.2	9[illegible].5	91.9	97.3	97.6	98.[illegible]	98.3	98.6	98.8	98.8	98.8	98.9	98.9	98.9	98.9
≥ 600		85.2	9[illegible].5	91.9	97.3	97.6	98.0	98.3	98.6	98.8	98.8	98.8	98.9	98.9	98.9	98.9
≥ 500		85.2	9[illegible].5	91.9	97.3	97.6	98.0	98.6	98.9	99.1	99.1	99.1	99.2	99.2	99.2	99.[illegible]
≥ 400		85.4	90.6	92.0	97.4	97.7	98.2	98.8	99.4	99.5	99.5	99.5	99.7	99.7	99.7	99.7
≥ 300		85.4	90.6	92.0	97.4	97.7	98.2	98.8	99.4	99.5	99.5	99.5	99.7	99.7	99.7	99.7
≥ 200		85.4	90.6	92.0	97.4	97.7	98.2	98.8	99.4	99.5	99.5	99.5	99.7	99.7	99.7	99.7
≥ 100		85.4	90.6	92.0	97.4	97.7	98.2	98.8	99.4	99.5	99.5	99.5	99.7	99.7	99.7	99.7
≥ 0		85.7	91.0	92.3	97.7	98.0	98.5	99.1	99.7	99.8	99.8	99.8	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 662

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
USAF/WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | TAEGU AB KO STATION NAME | 69-73,74-81 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		41.6	44.8	45.2	51.2	51.2	52.8	53.0	53.1	53.6	53.7	53.7	53.9	53.9	53.9	54.1
≥ 20000		49.1	51.3	51.9	59.7	59.9	62.0	62.1	62.3	62.7	62.9	62.9	63.0	63.1	63.2	63.3
≥ 18000		55.6	56.7	57.3	66.2	66.5	68.7	69.0	69.2	69.8	69.9	69.9	70.1	70.1	70.1	70.4
≥ 16000		55.6	56.7	57.3	66.2	66.6	68.7	69.1	69.3	69.8	69.9	69.9	70.1	70.1	70.1	70.4
≥ 14000		56.3	57.6	58.2	67.2	67.7	69.8	70.1	70.2	70.8	71.0	71.0	71.1	71.1	71.1	71.4
≥ 12000		57.4	58.5	59.1	68.3	68.7	70.8	71.3	71.4	72.0	72.2	72.2	72.3	72.3	72.3	72.6
≥ 10000		58.0	62.6	63.2	72.6	73.1	75.1	75.6	75.7	76.3	76.5	76.5	76.6	76.6	76.6	76.9
≥ 9000		58.0	62.6	63.2	72.6	73.1	75.1	75.6	75.7	76.3	76.5	76.5	76.6	76.6	76.6	76.9
≥ 8000		57.3	64.1	64.7	74.4	74.9	76.9	77.4	77.5	78.1	78.3	78.3	78.4	78.4	78.4	78.7
≥ 7000		58.5	65.3	65.9	75.6	76.0	78.1	78.6	78.7	79.3	79.5	79.5	79.6	79.6	79.6	79.9
≥ 6000		59.0	65.7	66.3	76.2	76.6	78.7	79.2	79.3	79.9	80.1	80.1	80.2	80.2	80.2	80.5
≥ 5000		59.6	66.3	66.9	76.9	77.4	79.5	80.1	80.2	80.8	81.0	81.0	81.1	81.1	81.1	81.4
≥ 4500		59.6	66.3	66.9	76.9	77.4	79.5	80.1	80.2	80.8	81.0	81.0	81.1	81.1	81.1	81.4
≥ 4000		60.9	67.8	68.6	78.7	79.2	81.3	81.9	82.2	82.8	82.9	82.9	83.1	83.1	83.1	83.4
≥ 3500		61.5	68.6	69.3	79.5	79.9	82.0	82.6	82.9	83.5	83.7	83.7	83.8	83.8	83.8	84.1
≥ 3000		66.5	74.6	75.4	86.7	87.3	89.5	90.3	90.6	91.3	91.5	91.5	91.6	91.6	91.6	91.9
≥ 2500		68.1	76.2	77.1	88.9	89.5	91.9	92.7	93.1	93.9	94.0	94.0	94.2	94.2	94.2	94.5
≥ 2000		68.4	76.8	78.0	90.9	91.8	94.2	95.1	95.4	96.3	96.4	96.4	96.6	96.6	96.6	96.9
≥ 1800		68.6	76.9	78.1	91.2	92.1	94.5	95.4	95.7	96.6	96.7	96.7	96.9	96.9	96.9	97.2
≥ 1500		68.6	77.1	78.3	91.3	92.2	94.9	96.0	96.3	97.2	97.3	97.3	97.5	97.5	97.5	97.8
≥ 1200		68.7	77.2	78.4	91.6	92.5	95.2	96.3	96.6	97.5	97.8	97.8	97.9	97.9	97.9	98.2
≥ 1000		68.7	77.2	78.4	91.8	92.7	95.4	96.6	96.9	97.8	98.1	98.1	98.2	98.2	98.2	98.5
≥ 900		68.7	77.2	78.4	91.8	92.7	95.4	96.6	96.9	97.8	98.1	98.1	98.2	98.2	98.2	98.5
≥ 800		68.7	77.2	78.4	91.8	92.7	95.4	96.6	96.9	97.8	98.2	98.2	98.4	98.4	98.4	98.7
≥ 700		68.7	77.2	78.4	91.8	92.7	95.4	96.6	96.9	97.8	98.2	98.2	98.4	98.4	98.4	98.7
≥ 600		68.7	77.2	78.4	91.8	92.7	95.4	96.6	96.9	97.8	98.2	98.2	98.4	98.4	98.4	98.7
≥ 500		68.7	77.2	78.4	91.8	92.7	95.4	96.6	96.9	97.8	98.2	98.2	98.7	98.7	98.7	99.0
≥ 400		69.7	77.2	78.4	91.9	92.8	95.8	97.0	97.3	98.2	98.7	98.7	99.1	99.1	99.3	99.6
≥ 300		68.7	77.2	78.4	91.9	92.8	95.8	97.0	97.3	98.2	98.7	98.7	99.1	99.1	99.3	99.6
≥ 200		68.7	77.2	78.4	91.9	92.8	95.8	97.0	97.3	98.2	98.8	98.8	99.3	99.3	99.4	99.7
≥ 100		68.7	77.2	78.4	91.9	92.8	95.8	97.2	97.5	98.4	99.0	99.0	99.4	99.4	99.6	99.9
≥ 0		68.7	77.2	78.4	92.1	93.0	96.0	97.3	97.6	98.5	99.1	99.1	99.6	99.6	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 665

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] AT- - SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-70, 74-79, 81 YEARS | MA MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		4[illegible].5	44.7	45.6	50.9	52.0	53.8	54.6	55.[illegible]	55.6	55.6	55.6	55.6	55.6	55.6	55.6
≥ 20000		46.3	51.7	53.[illegible]	59.9	61.1	63.3	64.2	64.[illegible]	65.4	65.4	65.4	65.4	65.4	65.4	65.4
≥ 18000		49.5	56.4	57.8	64.9	66.3	68.4	69.5	70.[illegible]	70.7	70.7	70.7	70.7	70.7	70.7	70.7
≥ 16000		49.5	56.4	57.8	65.2	66.6	68.8	69.8	70.[illegible]	71.0	71.0	71.0	71.0	71.[illegible]	71.0	71.[illegible]
≥ 14000		51.[illegible]	57.6	59.[illegible]	66.6	68.1	70.3	71.3	71.[illegible]	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 12000		51.2	58.1	59.5	67.7	69.2	71.5	72.6	73.[illegible]	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 10000		53.7	61.8	62.2	71.3	73.3	75.6	76.7	77.1	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 9000		53.7	61.8	62.2	71.3	73.3	75.6	76.7	77.1	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 8000		54.3	61.9	63.3	72.6	74.7	77.1	78.2	78.7	79.4	79.4	79.4	79.4	79.4	79.4	79.4
≥ 7000		54.6	62.2	63.6	72.9	75.0	77.4	78.5	79.[illegible]	79.7	79.7	79.7	79.7	79.7	79.7	79.7
≥ 6000		54.9	62.5	64.2	73.8	75.9	78.4	79.4	79.9	80.6	80.6	80.6	80.6	80.6	80.6	80.[illegible]
≥ 5000		55.0	63.6	64.9	74.7	76.8	79.3	80.3	80.[illegible]	81.6	81.6	81.6	81.6	81.6	81.6	81.[illegible]
≥ 4500		55.0	63.6	64.9	74.7	76.8	79.3	80.3	80.[illegible]	81.6	81.6	81.6	81.6	81.6	81.6	81.[illegible]
≥ 4000		56.4	64.9	66.3	76.2	78.7	81.1	82.2	82.[illegible]	83.4	83.4	83.4	83.4	83.4	83.4	83.4
≥ 3500		56.4	64.9	66.3	76.5	79.0	81.4	82.5	82.9	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 3000		62.5	71.3	72.9	84.6	87.0	89.8	91.0	91.[illegible]	92.4	92.4	92.4	92.4	92.4	92.4	92.4
≥ 2500		63.7	72.6	74.1	86.0	88.6	91.3	92.7	93.1	94.1	94.1	94.1	94.1	94.1	94.1	94.1
≥ 2000		64.3	73.3	75.0	87.7	90.4	93.3	94.7	95.[illegible]	96.3	96.[illegible]	96.[illegible]	96.3	96.[illegible]	96.[illegible]	96.[illegible]
≥ 1800		64.3	73.3	75.0	87.7	90.4	93.3	94.7	95.1	96.0	96.0	96.0	96.1	96.[illegible]	96.[illegible]	96.[illegible]
≥ 1500		64.6	73.8	75.5	89.0	91.8	95.3	96.6	97.[illegible]	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 1200		64.6	73.8	75.5	89.5	92.2	95.7	97.1	97.7	98.6	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1000		64.6	73.8	75.5	89.5	92.2	95.7	97.1	97.7	98.6	98.8	98.8	98.8	98.8	98.8	98.8
≥ 900		64.6	73.8	75.5	89.5	92.2	95.7	97.1	97.7	98.6	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800		64.6	73.8	75.5	89.8	92.5	96.0	97.4	98.[illegible]	98.9	99.1	99.1	99.1	99.1	99.1	99.1
≥ 700		64.6	73.8	75.5	89.8	92.5	96.0	97.6	98.[illegible]	99.1	99.2	99.2	99.2	99.2	99.2	99.2
≥ 600		64.6	73.8	75.5	89.9	92.7	96.2	97.9	98.[illegible]	99.4	99.5	99.5	99.5	99.5	99.5	99.5
≥ 500		64.6	73.8	75.5	89.9	92.7	96.3	98.0	98.[illegible]	99.5	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400		64.6	73.8	75.5	89.9	92.7	96.3	98.0	98.6	99.5	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300		64.6	73.8	75.5	89.9	92.7	96.3	98.0	98.[illegible]	99.5	99.7	99.7	99.7	99.7	99.7	99.7
≥ 200		64.6	73.6	75.5	89.9	92.7	96.3	98.0	98.6	99.5	99.7	99.7	99.7	99.7	99.7	99.7
≥ 100		64.6	73.8	75.5	90.1	92.8	96.5	98.3	98.9	99.8	100.0	100.0	100.0	100.0	100.0	100.[illegible]
≥ 0		64.6	73.8	75.5	90.1	92.8	96.5	98.3	98.9	99.8	100.0	100.0	100.0	100.0	100.0	100.[illegible]

TOTAL NUMBER OF OBSERVATIONS 65[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | TAEGU AP KO STATION NAME | 69-72,74-79,81 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

12.0-14.0 HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	0
NO CEILING		49.6	51.[illegible]	51.3	52.4	52.7	53.4	53.8	53.[illegible]	53.9	53.9	53.8	53.8	53.8	53.8	54.1
≥ 20000		59.[illegible]	61.[illegible]	62.5	62.5	62.8	63.6	63.9	63.[illegible]	63.9	63.9	63.9	63.9	63.[illegible]	63.9	64.[illegible]
≥ 18000		62.9	65.2	65.7	67.7	68.[illegible]	68.8	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.4
≥ 16000		63.1	65.4	65.8	67.8	68.1	68.9	69.2	69.[illegible]	69.2	69.2	69.2	69.2	69.2	69.2	69.5
≥ 14000		64.3	66.6	67.1	69.4	69.7	70.4	70.8	70.[illegible]	70.8	70.8	70.8	70.8	70.8	70.8	71.1
≥ 12000		68.5	68.[illegible]	68.5	71.2	71.5	72.3	72.6	72.[illegible]	72.6	72.6	72.6	72.6	72.[illegible]	72.6	72.9
≥ 10000		68.8	70.6	71.1	73.8	74.3	75.[illegible]	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.7
≥ 9000		68.8	70.6	71.1	74.0	74.4	75.2	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.8
≥ 8000		70.3	72.7	73.2	76.3	76.7	77.5	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	78.1
≥ 7000		70.1	72.9	73.4	76.6	77.0	77.8	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.4
≥ 6000		70.3	73.0	73.5	76.7	77.2	77.9	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.6
≥ 5000		71.2	74.0	74.4	77.8	78.3	79.0	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.6
≥ 4500		71.2	74.0	74.4	77.8	78.3	79.0	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.3	79.6
≥ 4000		74.0	76.9	77.3	81.0	81.5	82.2	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.8
≥ 3500		76.0	79.0	79.5	83.6	84.1	84.8	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.1	85.5
≥ 3000		80.2	83.6	84.4	89.4	89.9	90.7	91.0	91.[illegible]	91.0	91.0	91.0	91.0	91.0	91.0	91.3
≥ 2500		82.2	86.1	86.8	92.2	92.8	93.6	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	94.3
≥ 2000		83.0	87.1	88.4	94.2	94.8	95.6	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	96.2
≥ 1800		83.2	87.3	88.5	94.3	95.1	95.9	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.5
≥ 1500		83.2	87.4	88.7	94.8	95.7	96.6	96.9	96.9	97.1	97.2	97.4	97.4	97.4	97.4	97.7
≥ 1200		83.2	87.4	88.7	94.8	95.7	96.6	97.1	97.1	97.2	97.4	97.5	97.5	97.5	97.5	97.9
≥ 1000		83.2	87.4	88.7	94.9	95.9	96.8	97.2	97.4	97.5	97.9	98.0	98.0	98.[illegible]	98.0	98.3
≥ 900		83.2	87.4	88.7	95.1	96.0	96.9	97.4	97.5	97.7	98.[illegible]	98.2	98.2	98.2	98.2	98.5
≥ 800		83.3	87.9	89.1	95.9	96.8	97.7	98.3	98.5	98.6	98.9	99.1	99.1	99.1	99.1	99.4
≥ 700		83.3	87.9	89.1	95.9	96.8	97.7	98.3	98.5	98.6	98.9	99.1	99.1	99.1	99.1	99.4
≥ 600		83.3	87.9	89.1	95.9	96.8	97.7	98.5	98.6	98.8	99.1	99.2	99.2	99.2	99.2	99.5
≥ 500		83.3	87.9	89.1	95.9	96.8	97.9	98.8	98.9	99.1	99.4	99.5	99.5	99.5	99.5	99.8
≥ 400		83.3	87.9	89.1	95.9	96.8	97.9	98.8	98.9	99.1	99.4	99.5	99.5	99.5	99.5	99.8
≥ 300		83.3	87.9	89.1	95.9	96.8	97.9	98.8	98.9	99.1	99.4	99.5	99.5	99.5	99.5	99.8
≥ 200		83.3	88.1	89.3	96.0	96.9	98.[illegible]	98.9	99.1	99.2	99.5	99.7	99.7	99.7	99.7	100.0
≥ 100		83.3	88.1	89.3	96.0	96.9	98.0	98.9	99.1	99.2	99.5	99.7	99.7	99.7	99.7	100.0
≥ 0		83.3	88.1	89.3	96.0	96.9	98.0	98.9	99.1	99.2	99.5	99.7	99.7	99.7	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 653

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]TAC
[illegible]ATH & SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-75, 74-79, c1 YEARS | MAR MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] HOURS LST

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥¼	≥5/16	≥0
NO CEILING		52.7	53.3	53.4	53.6	53.8	53.9	53.9	53.9	53.9	53.9	53.9	53.9	54.0	54.0	54.0
≥ 20000		63.7	64.4	64.6	64.7	64.9	65.2	65.2	65.2	65.2	65.2	65.2	65.2	65.3	65.3	65.3
≥ 18000		69.8	70.5	70.7	70.8	71.0	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.4	71.4	71.4
≥ 16000		69.8	70.5	70.7	70.8	71.0	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.4	71.4	71.4
≥ 14000		71.1	71.8	71.1	71.4	71.6	71.9	71.9	71.9	71.9	71.9	71.9	71.9	72.0	72.0	72.0
≥ 12000		71.6	72.3	72.6	73.2	73.4	73.7	73.7	73.7	73.7	73.7	73.7	73.8	73.8	73.8	73.8
≥ 10000		74.7	75.6	75.9	76.5	76.6	76.9	76.9	76.9	76.9	76.9	76.9	77.1	77.1	77.1	77.1
≥ 9000		74.7	75.6	75.9	76.5	76.6	76.9	76.9	76.9	76.9	76.9	76.9	77.1	77.1	77.1	77.1
≥ 8000		75.4	76.6	76.9	77.8	78.0	78.3	78.3	78.3	78.3	78.3	78.3	78.4	78.4	78.4	78.4
≥ 7000		75.6	76.9	77.1	78.0	78.1	78.4	78.4	78.4	78.4	78.4	78.4	78.6	78.6	78.6	78.6
≥ 6000		75.8	76.8	77.1	78.0	78.1	78.4	78.4	78.4	78.4	78.4	78.4	78.6	78.6	78.6	78.6
≥ 5000		76.8	78.1	78.3	79.2	79.3	79.6	79.6	79.6	79.6	79.6	79.6	79.8	79.8	79.8	79.8
≥ 4500		76.8	78.3	78.3	79.2	79.3	79.6	79.6	79.6	79.6	79.6	79.6	79.8	79.8	79.8	79.8
≥ 4000		80.4	81.5	81.8	82.9	83.0	83.3	83.3	83.3	83.3	83.3	83.3	83.5	83.5	83.5	83.5
≥ 3500		82.6	83.8	84.1	85.6	85.7	86.0	86.0	86.0	86.0	86.0	86.0	86.2	86.2	86.2	86.2
≥ 3000		86.5	88.1	88.5	90.2	90.3	90.6	90.6	90.6	90.6	90.6	90.6	90.8	90.8	90.8	90.8
≥ 2500		87.8	90.0	90.5	92.3	92.4	92.7	92.7	92.7	92.7	92.7	92.7	92.9	92.9	92.9	92.9
≥ 2000		88.5	91.5	92.1	94.8	95.1	95.5	95.5	95.5	95.5	95.5	95.5	95.7	95.7	95.7	95.7
≥ 1800		88.9	91.8	92.4	95.7	96.0	96.4	96.4	96.4	96.4	96.4	96.4	96.6	96.6	96.6	96.6
≥ 1500		89.0	92.3	93.2	97.0	97.3	97.9	97.9	97.9	97.9	97.9	97.9	98.1	98.1	98.1	98.1
≥ 1200		89.1	92.4	93.3	97.2	97.6	98.4	98.4	98.4	98.5	98.5	98.5	98.7	98.7	98.7	98.7
≥ 1000		89.3	92.6	93.5	97.3	97.8	98.5	98.5	98.5	98.8	98.8	98.8	99.0	99.0	99.0	99.0
≥ 900		89.3	92.6	93.5	97.3	97.8	98.5	98.5	98.5	98.8	98.8	98.8	99.0	99.0	99.0	99.0
≥ 800		89.3	92.6	93.5	97.6	98.1	98.8	98.8	98.8	99.3	99.4	99.4	99.6	99.6	99.6	99.6
≥ 700		89.3	92.6	93.5	97.6	98.1	98.8	98.8	98.8	99.3	99.4	99.4	99.6	99.6	99.6	99.6
≥ 600		89.3	92.6	93.5	97.6	98.1	98.8	98.8	99.1	99.6	99.7	99.7	99.9	99.9	99.9	99.9
≥ 500		89.3	92.6	93.5	97.6	98.1	98.8	98.8	99.1	99.6	99.7	99.7	99.9	99.9	99.9	99.9
≥ 400		89.3	92.6	93.5	97.6	98.1	98.8	98.8	99.1	99.6	99.7	99.7	99.9	99.9	99.9	99.9
≥ 300		89.3	92.6	93.5	97.6	98.1	98.8	98.8	99.1	99.6	99.7	99.7	99.9	99.9	99.9	99.9
≥ 200		89.3	92.6	93.5	97.6	98.1	98.8	98.8	99.1	99.6	99.7	99.7	99.9	99.9	99.9	99.9
≥ 100		89.3	92.6	93.5	97.8	98.2	99.0	99.0	99.1	99.7	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0		89.3	92.6	93.5	97.8	98.2	99.0	99.0	99.1	99.7	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-70,74-79,81 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		51.6	51.9	51.9	52.3	52.3	52.3	52.5	52.[illegible]	52.5	52.9	52.9	52.6	52.6	52.6	52.6
≥ 20000		61.9	62.6	62.6	63.0	63.2	63.2	63.3	63.3	63.3	63.3	63.3	63.3	63.5	63.5	63.5
≥ 18000		67.2	67.9	67.9	68.6	68.8	68.8	68.9	68.9	68.9	68.9	68.9	68.9	69.1	69.1	69.1
≥ 16000		67.2	67.9	67.9	68.6	68.8	68.8	68.9	68.9	68.9	68.9	68.9	68.9	69.1	69.1	69.1
≥ 14000		67.9	68.6	68.6	69.4	69.5	69.5	69.6	69.6	69.6	69.6	69.6	69.6	69.8	69.8	69.8
≥ 12000		69.5	70.2	70.2	71.0	71.1	71.1	71.3	71.3	71.3	71.3	71.3	71.3	71.4	71.4	71.4
≥ 10000		73.6	74.3	74.3	75.2	75.4	75.4	75.5	75.5	75.5	75.5	75.5	75.5	75.7	75.7	75.7
≥ 9000		73.6	74.3	74.3	75.2	75.4	75.4	75.5	75.5	75.5	75.5	75.5	75.5	75.7	75.7	75.7
≥ 8000		76.1	76.8	76.8	77.9	78.0	78.0	78.2	78.2	78.2	78.2	78.2	78.2	78.3	78.3	78.3
≥ 7000		76.7	77.4	77.4	78.4	78.6	78.6	78.7	78.7	78.7	78.7	78.7	78.7	78.9	78.9	78.9
≥ 6000		77.0	77.7	77.7	78.7	78.9	79.9	79.0	79.0	79.0	79.0	79.0	79.0	79.2	79.2	79.2
≥ 5000		77.7	78.4	78.4	79.5	79.6	79.6	79.8	79.8	79.8	79.8	79.8	79.8	79.9	79.9	79.9
≥ 4500		77.7	78.4	78.4	79.5	79.6	79.6	79.8	79.8	79.8	79.8	79.8	79.8	79.9	79.9	79.9
≥ 4000		79.0	79.8	79.8	80.8	80.9	80.9	81.1	81.1	81.1	81.1	81.1	81.1	81.2	81.2	81.2
≥ 3500		80.5	81.2	81.2	82.6	82.7	82.7	82.8	82.8	82.8	82.8	82.8	82.8	83.0	83.0	83.0
≥ 3000		85.3	87.1	87.1	89.0	89.1	89.1	89.3	89.4	89.4	89.7	89.7	89.9	89.9	89.9	89.9
≥ 2500		88.6	90.5	90.5	92.5	92.7	92.7	92.8	93.0	93.0	93.3	93.3	93.4	93.4	93.4	93.4
≥ 2000		89.4	91.6	91.6	93.7	93.8	93.8	94.0	94.1	94.1	94.4	94.4	94.6	94.6	94.6	94.6
≥ 1800		89.6	92.1	92.1	94.3	94.4	94.4	94.6	94.7	94.7	95.0	95.0	95.2	95.2	95.2	95.2
≥ 1500		89.6	92.6	92.6	96.0	96.2	96.8	97.2	97.4	97.4	97.7	97.7	97.8	97.8	97.8	97.8
≥ 1200		89.6	93.0	93.0	96.3	96.6	97.5	98.2	98.4	98.5	98.8	98.8	99.0	99.0	99.0	99.0
≥ 1000		89.6	93.0	93.0	96.3	96.8	97.7	98.7	98.8	99.0	99.3	99.3	99.4	99.4	99.4	99.4
≥ 900		89.6	93.0	93.0	96.3	96.8	97.7	98.7	98.8	99.0	99.3	99.3	99.4	99.4	99.4	99.4
≥ 800		89.6	93.0	93.0	96.5	96.9	97.8	98.8	99.0	99.1	99.7	99.7	99.9	99.9	99.9	99.9
≥ 700		89.6	93.0	93.0	96.5	96.9	97.8	98.8	99.0	99.1	99.7	99.7	99.9	99.9	99.9	99.9
≥ 600		89.6	93.0	93.0	96.5	96.9	97.8	98.8	99.0	99.1	99.7	99.7	99.9	99.9	99.9	99.9
≥ 500		89.6	93.0	93.0	96.5	96.9	97.8	98.8	99.0	99.1	99.7	99.7	99.9	99.9	99.9	99.9
≥ 400		89.6	93.0	93.0	96.5	96.9	97.8	98.8	99.0	99.1	99.7	99.7	99.9	99.9	99.9	99.9
≥ 300		89.6	93.0	93.0	96.5	96.9	97.8	98.8	99.0	99.1	99.7	99.7	99.9	99.9	99.9	99.9
≥ 200		89.6	93.1	93.1	96.6	97.1	97.9	99.0	99.1	99.3	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100		89.6	93.1	93.1	96.6	97.1	97.9	99.0	99.1	99.3	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0		89.6	93.1	93.1	96.6	97.1	97.9	99.0	99.1	99.3	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-78, 74-79, c1 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1[illegible]-23[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		55.7	55.7	56.1	56.1	56.1	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4
≥ 20000		66.3	66.3	66.6	67.1	67.1	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4
≥ 18000		71.6	71.6	71.9	71.6	71.6	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 16000		71.6	71.6	71.9	71.6	71.6	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 14000		71.[illegible]	71.[illegible]	71.3	72.[illegible]	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3	72.3
≥ 12000		72.3	72.3	72.6	73.3	73.3	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6
≥ 10000		76.6	76.6	76.9	78.[illegible]	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 9000		76.6	76.6	76.9	78.0	78.0	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3	78.3
≥ 8000		78.3	78.3	78.6	79.8	79.8	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 7000		78.3	78.3	78.6	79.8	79.8	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 6000		79.2	79.2	79.5	80.6	80.6	80.9	80.9	80.9	80.9	80.9	80.9	80.9	80.9	80.9	80.9
≥ 5000		79.3	79.3	79.6	80.8	80.8	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 4500		79.3	79.3	79.6	80.8	80.8	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 4000		79.9	79.9	80.2	81.3	81.3	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 3500		81.5	81.5	81.8	81.9	81.9	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 3000		88.7	89.1	89.5	91.4	91.4	91.7	92.0	92.0	92.0	92.1	92.1	92.1	92.1	92.1	92.1
≥ 2500		91.2	91.7	91.1	93.5	93.5	93.8	94.1	94.1	94.3	94.4	94.4	94.4	94.4	94.4	94.4
≥ 2000		90.7	91.4	91.8	95.3	95.3	95.6	95.8	95.8	96.0	96.1	96.1	96.1	96.1	96.1	96.1
≥ 1800		90.7	91.4	91.8	96.1	96.1	96.4	96.7	96.7	96.8	97.0	97.0	97.0	97.0	97.0	97.0
≥ 1500		90.7	91.4	91.8	97.1	97.1	97.6	98.1	98.1	98.3	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1200		90.8	91.5	92.0	97.6	97.8	98.7	99.4	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1000		90.8	91.5	92.0	97.6	97.8	98.7	99.4	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 900		91.8	91.5	92.0	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 800		91.8	91.5	92.[illegible]	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 700		91.8	91.5	92.[illegible]	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 600		91.8	91.5	92.0	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		91.8	91.5	92.[illegible]	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		90.8	91.5	92.[illegible]	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		90.8	91.5	92.0	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		90.8	91.5	92.0	97.6	97.8	98.9	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100		91.[illegible]	91.7	92.1	97.7	98.0	99.0	99.7	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		91.[illegible]	91.7	92.1	97.7	98.0	99.0	99.7	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 697

USAF ETAC FORM [illegible] 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...AFETAC
... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | ...ALCO AB KS (STATION NAME) | 69-7..,74-.1 (YEARS) | MA. (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		..7	52.1	52.5	54.3	54.5	55.1	55.3	55.4	55.5	55.5	55.5	55.6	55.6	55.6	55.7
≥ 20000		..4	61.4	61.8	64.3	64.6	65.3	65.5	65.6	65.7	65.8	65.8	65.8	65.8	65.8	65.9
≥ 18000		63.9	64.3	66.7	69.5	69.9	70.6	70.8	70.9	71.1	71.1	71.1	71.2	71.2	71.2	71.3
≥ 16000		64..	66.3	66.8	69.6	69.9	70.7	70.9	71..	71.1	71.2	71.2	71.2	71.2	71.2	71.3
≥ 14000		64.7	67.1	67.5	7..5	70.8	71.6	71.8	71.9	72.0	72.0	72.0	72.1	72.1	72.1	72.2
≥ 12000		65.8	68.2	68.7	71.8	72.2	73.0	73.2	73.3	73.4	73.5	73.5	73.5	73.5	73.5	73.6
≥ 10000		6..3	71.8	72.3	75.7	76.1	76.9	77.1	77..	77.4	77.4	77.4	77.5	77.5	77.5	77.6
≥ 9000		6..3	71.8	72.3	75.7	76.2	76.9	77.1	77.2	77.4	77.4	77.4	77.5	77.5	77.5	77.6
≥ 8000		71.1	73.9	74.2	77.8	78.2	79.0	79.3	79.5	79.5	79.5	79.5	79.6	79.6	79.6	79.7
≥ 7000		71.4	74.2	74.6	78.2	78.7	79.4	79.7	79.8	79.9	79.9	79.9	8..0	80.0	80.0	80.1
≥ 6000		71.8	74.6	75.1	78.7	79.2	79.9	80.2	80.3	80.4	80.5	80.5	80.5	80.5	80.6	80.6
≥ 5000		72.4	75.3	75.7	79.4	79.9	80.7	80.9	81..	81.2	81.2	81.2	81.3	81.3	81.3	81.3
≥ 4500		72.4	75.3	75.7	79.4	79.9	80.7	80.9	81.	81.2	81.2	81.2	81.3	81.3	81.3	81.3
≥ 4000		74.1	77.0	77.6	81.3	81.9	82.6	82.9	83..	83.1	83.2	83.2	83.2	83.2	83.2	83.3
≥ 3500		75.1	78.1	78.6	82.6	83.1	83.8	84.1	84.2	84.4	84.5	84.5	84.5	84.5	84.5	84.5
≥ 3000		80.6	84.2	84.9	89.6	90.1	91.0	91.3	91.5	91.7	91.8	91.9	91.9	91.9	91.9	91.9
≥ 2500		82.1	86.3	86.7	91.9	92.4	93.3	93.6	93.8	94.1	94.2	94.2	94.2	94.2	94.2	94.3
≥ 2000		82.7	87.0	87.9	93.8	94.4	95.4	95.7	95.9	96.2	96.3	96.3	96.3	96.3	96.3	96.4
≥ 1800		82.8	87.1	88.0	94.2	94.8	95.8	96.1	96.3	96.6	96.7	96.7	96.7	96.7	96.7	96.8
≥ 1500		82.8	87.4	88.3	95.1	95.8	97.0	97.5	97.7	97.9	98.0	98.1	98.1	98.1	98.1	98.2
≥ 1200		82.9	87.4	88.4	95.3	96.1	97.4	98.1	98.3	98.6	98.7	98.7	98.8	98.8	98.8	98.9
≥ 1000		82.9	87.5	88.4	95.4	96.2	97.5	98.2	98.4	98.8	98.9	98.9	99.0	99..	99.0	99.1
≥ 900		82.9	87.5	88.4	95.4	96.2	97.6	98.2	98.5	98.8	99.0	99.0	99.0	99.0	99.0	99.1
≥ 800		82.9	87.5	88.4	95.6	96.4	97.7	98.4	98.7	99..	99.3	99.3	99.3	99.3	99.3	99.4
≥ 700		82.9	87.5	88.4	95.6	96.4	97.7	98.5	98.7	99.0	99.3	99.3	99.4	99.4	99.4	99.4
≥ 600		82.9	87.5	88.4	95.6	96.4	97.8	98.5	98.8	99.1	99.4	99.4	99.5	99.5	99.5	99.5
≥ 500		82.9	87.5	88.4	95.6	96.4	97.8	98.6	98.9	99.2	99.5	99.5	99.6	99.6	99.6	99.7
≥ 400		82.9	87.5	88.5	95.6	96.5	97.9	98.7	99..	99.3	99.6	99.6	99.7	99.7	99.7	99.8
≥ 300		82.9	87.5	88.5	95.6	96.5	97.9	98.7	99.0	99.3	99.6	99.6	99.7	99.7	99.7	99.8
≥ 200		82.9	87.6	88.5	95.7	96.5	97.9	98.7	99.	99.4	99.6	99.6	99.8	99.8	99.8	99.9
≥ 100		82.9	87.6	88.5	95.7	96.6	98.0	98.8	99.1	99.5	99.7	99.7	99.9	99.9	99.9	99.9
≥ 0		83.0	87.6	88.5	95.8	96.6	98.0	98.9	99.2	99.5	99.8	99.8	99.9	99.9	99.9	100.

TOTAL NUMBER OF OBSERVATIONS 2351

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible] STATION NAME | 69-[illegible],74-79,81 YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		49.6	51.1	51.1	52.5	52.5	52.5	52.7	52.7	52.7	52.7	52.7	52.7	[illegible]	[illegible]	[illegible]
≥ 20000		56.1	57.5	57.5	59.0	59.0	59.0	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	[illegible]
≥ 18000		63.1	64.6	64.6	66.2	66.2	66.2	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	[illegible]
≥ 16000		63.1	64.6	64.6	66.2	66.2	66.2	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	[illegible]
≥ 14000		63.7	65.3	65.3	67.0	67.0	67.0	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 12000		64.3	65.9	65.9	67.6	67.6	67.6	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	[illegible]
≥ 10000		67.8	69.3	69.3	71.1	71.1	71.1	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	[illegible]
≥ 9000		67.8	69.3	69.3	71.1	71.1	71.1	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.5
≥ 8000		71.2	73.0	73.0	74.7	74.7	74.7	75.2	75.2	75.2	75.2	75.2	75.2	75.2	75.2	[illegible]
≥ 7000		71.4	73.1	73.1	74.8	74.8	74.8	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	[illegible]
≥ 6000		71.7	73.4	73.4	75.2	75.2	75.2	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	[illegible]
≥ 5000		71.7	73.4	73.4	75.2	75.2	75.2	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	[illegible]
≥ 4500		71.7	73.4	73.4	75.2	75.2	75.2	75.6	75.6	75.6	75.6	75.6	75.6	75.6	[illegible]	[illegible]
≥ 4000		73.7	75.9	75.9	77.7	77.7	77.7	78.1	78.1	78.1	78.1	78.1	78.1	78.1	[illegible]	[illegible]
≥ 3500		75.0	77.2	77.2	79.2	79.2	79.2	79.7	79.7	79.7	79.7	79.7	79.7	79.7	[illegible]	[illegible]
≥ 3000		79.9	83.9	84.4	86.9	86.9	86.9	87.4	87.4	87.4	87.4	87.4	87.4	[illegible]	[illegible]	[illegible]
≥ 2500		83.7	88.5	89.0	92.5	92.5	92.5	92.9	92.9	92.9	92.9	92.9	92.9	92.9	[illegible]	[illegible]
≥ 2000		84.7	91.3	90.9	93.3	95.3	95.3	95.8	95.8	95.8	95.8	95.8	95.8	95.8	[illegible]	[illegible]
≥ 1800		85.2	91.7	91.4	95.9	96.2	96.2	96.7	96.7	96.7	96.7	96.7	96.7	96.7	96.7	[illegible]
≥ 1500		85.5	91.8	91.7	96.7	97.2	97.2	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 200		85.9	91.8	91.7	96.7	97.2	97.2	97.6	97.6	98.1	98.1	98.1	98.1	98.1	98.1	[illegible]
≥ 1000		85.5	91.8	92.5	97.6	98.1	98.1	98.6	98.6	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 900		85.5	91.8	92.5	97.6	98.1	98.1	98.6	98.6	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 800		85.5	91.8	92.5	97.6	98.1	98.1	98.6	98.6	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 700		85.5	91.8	92.5	97.6	98.1	98.3	98.7	98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 600		85.5	91.8	92.5	97.6	98.1	98.3	98.7	98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 500		85.5	91.8	92.5	97.6	98.1	98.3	98.7	98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 400		85.5	91.8	92.5	97.6	98.1	98.3	98.7	98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 300		85.5	91.8	92.5	97.6	98.1	98.3	98.7	98.7	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 200		85.8	91.8	92.9	98.4	98.9	99.1	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	[illegible]
≥ 100		85.8	91.8	92.9	98.4	98.9	99.1	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	[illegible]
≥ 0		85.8	91.8	92.9	98.4	98.9	99.1	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	[illegible]

TOTAL NUMBER OF OBSERVATIONS 636

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
A... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1... STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | AP... MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

... HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		47.9	51.2	51.3	54.6	54.6	55.4	55.8	56.0	56.0	56.0	56.0	56.0	56.0	56.0	56.0
≥ 20000		57.6	61.0	61.2	64.4	64.4	65.2	65.6	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 18000		62.2	66.4	66.5	70.1	70.1	70.8	71.4	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6
≥ 16000		62.2	66.4	66.5	70.1	70.1	70.8	71.4	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6
≥ 14000		63.2	67.4	67.6	71.1	71.1	71.9	72.5	72.6	72.6	72.6	72.6	72.6	72.6	72.6	72.6
≥ 12000		64.1	68.3	68.5	72.0	72.0	72.8	73.4	73.5	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 10000		67.9	72.2	72.3	75.9	75.9	76.6	77.2	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 9000		67.9	72.2	72.3	75.9	75.9	76.6	77.2	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 8000		70.1	74.4	74.6	78.4	78.4	79.2	79.8	79.9	79.9	79.9	79.9	79.9	79.9	79.9	79.9
≥ 7000		70.2	74.6	74.7	78.6	78.6	79.3	79.9	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 6000		70.2	74.6	74.7	78.6	78.6	79.3	79.9	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 5000		70.2	74.6	74.7	78.6	78.6	79.3	79.9	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 4500		70.2	74.6	74.7	78.6	78.6	79.3	79.9	80.1	80.1	80.1	80.1	80.1	80.1	80.1	80.1
≥ 4000		71.9	76.2	76.3	80.4	80.4	81.1	81.7	81.9	81.9	81.9	81.9	81.8	81.8	81.8	81.8
≥ 3500		72.6	76.9	77.1	81.1	81.1	81.8	82.4	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 3000		76.8	81.7	81.8	87.2	87.2	87.9	88.5	88.7	88.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 2500		78.7	83.8	84.1	91.5	91.5	92.3	92.9	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 2000		79.6	84.7	85.0	93.6	93.6	94.5	95.1	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 1800		80.1	85.1	85.4	94.0	94.0	95.2	95.8	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1500		80.2	85.6	85.9	95.2	95.2	96.7	97.3	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1200		80.2	85.6	85.9	95.2	95.2	96.9	97.8	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 1000		80.2	86.2	86.6	96.3	96.3	97.9	98.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 900		80.2	86.2	86.6	96.3	96.3	97.9	98.8	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 800		80.2	86.2	86.6	96.3	96.3	97.9	98.8	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
> 700		80.4	86.3	86.8	96.6	96.6	98.5	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 600		80.4	86.3	86.8	96.6	96.6	98.5	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500		80.5	86.5	86.9	96.7	96.7	98.7	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		80.5	86.5	86.9	96.7	96.7	98.7	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		80.5	86.5	86.9	96.7	96.7	98.7	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		80.7	86.6	87.1	96.9	96.9	98.8	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		80.7	86.6	87.1	96.9	96.9	98.8	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		80.7	86.6	87.1	96.9	96.9	98.8	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 672

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 69-73,74-79,c1 YEARS | APR MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] HOURS LST

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		3[illegible]	4[illegible]	41.6	47.4	47.7	49.5	50.1	50.1	50.2	50.4	50.4	50.4	50.4	50.4	50.4
≥ 20000		47.3	49.6	49.8	56.3	56.6	58.6	59.3	59.3	59.5	59.8	59.8	59.8	59.8	59.9	59.9
≥ 18000		48.1	53.9	53.9	61.5	61.8	63.9	64.7	64.7	64.8	65.1	65.1	65.1	65.1	65.1	65.3
≥ 16000		48.1	53.8	53.9	61.5	61.8	63.9	64.7	64.7	64.8	65.1	65.1	65.1	65.1	65.1	65.3
≥ 14000		48.6	54.4	54.5	62.6	62.9	65.1	65.7	65.7	65.9	66.2	66.2	66.2	66.2	66.2	66.3
≥ 12000		48.1	55.9	56.1	64.4	64.7	66.3	67.5	67.5	67.7	68.0	68.0	68.0	68.0	68.1	68.1
≥ 10000		59.7	59.3	59.5	68.1	68.4	70.5	71.2	71.2	71.4	71.7	71.7	71.7	71.7	71.7	72.1
≥ 9000		59.7	59.3	59.5	68.1	68.4	70.5	71.2	71.2	71.4	71.7	71.7	71.7	71.7	71.7	72.1
≥ 8000		63.4	62.4	62.6	71.7	72.0	74.1	74.8	74.8	75.0	75.3	75.3	75.3	75.3	75.3	75.6
≥ 7000		64.2	63.2	63.8	72.9	73.2	75.3	76.0	76.0	76.2	76.5	76.5	76.5	76.5	76.5	76.8
≥ 6000		64.5	63.9	64.1	73.2	73.5	75.6	76.3	76.3	76.5	76.8	76.8	76.8	76.8	76.8	77.1
≥ 5000		65.3	64.7	64.8	74.4	74.7	76.8	77.5	77.5	77.6	77.9	77.9	77.9	77.9	77.9	78.2
≥ 4500		65.3	64.7	64.8	74.4	74.7	76.8	77.5	77.5	77.6	77.9	77.9	77.9	77.9	77.9	78.2
≥ 4000		65.7	65.1	65.3	74.8	75.1	77.2	77.9	77.9	78.1	78.4	78.4	78.4	78.4	78.4	78.7
≥ 3500		66.9	66.3	66.5	76.0	76.3	78.4	79.1	79.1	79.3	79.6	79.6	79.6	79.6	79.6	79.9
≥ 3000		71.1	71.1	71.4	82.0	82.3	84.5	85.2	85.2	85.4	85.7	85.7	85.7	85.7	85.7	86.0
≥ 2500		72.3	73.3	73.6	84.9	85.5	87.8	88.5	88.5	88.7	89.1	89.1	89.1	89.1	89.2	89.5
≥ 2000		82.4	74.4	75.0	87.6	88.4	91.1	91.8	91.8	92.0	92.3	92.3	92.3	92.3	92.3	92.5
≥ 1800		82.6	74.5	75.1	87.9	88.7	91.5	92.3	92.3	92.4	92.7	92.7	92.7	92.7	92.7	93.0
≥ 1500		82.9	75.3	75.6	89.1	89.9	92.8	93.7	93.7	93.9	94.2	94.2	94.2	94.2	94.2	94.5
≥ 1200		83.3	75.3	76.0	90.2	90.9	93.9	94.9	95.1	95.2	95.5	95.5	95.5	95.5	95.5	95.8
≥ 1000		83.6	75.4	76.5	90.6	91.4	94.3	95.5	95.7	95.8	96.3	96.3	96.3	96.3	96.3	96.6
≥ 900		83.3	75.4	76.5	90.6	91.4	94.3	95.5	95.7	95.8	96.3	96.3	96.3	96.3	96.3	96.6
≥ 800		83.3	75.4	76.5	90.6	91.4	94.3	95.5	95.7	96.0	96.6	96.6	96.6	96.6	96.6	96.9
≥ 700		83.3	75.4	76.5	90.9	91.7	94.6	95.8	96.0	96.3	96.9	96.9	96.9	96.9	96.9	97.2
≥ 600		83.3	75.4	76.5	91.1	91.8	94.8	96.0	96.1	96.4	97.1	97.1	97.1	97.1	97.1	97.5
≥ 500		83.2	75.6	76.9	91.8	92.5	95.7	97.2	97.3	97.8	98.4	98.4	98.4	98.4	98.4	98.7
≥ 400		83.2	75.6	76.9	91.8	92.5	95.7	97.5	97.6	98.1	98.7	98.7	98.7	98.7	98.7	99.1
≥ 300		83.2	75.6	76.9	91.8	92.5	95.7	97.5	97.6	98.1	98.7	98.7	98.7	98.7	98.7	99.1
≥ 200		83.2	75.7	77.0	92.3	93.1	96.4	98.2	98.4	98.8	99.4	99.4	99.4	99.4	99.4	99.8
≥ 100		83.2	75.7	77.0	92.3	93.1	96.4	98.2	98.4	98.8	99.4	99.4	99.4	99.4	99.4	99.9
≥ 0		83.3	75.9	77.2	92.4	93.3	96.6	98.4	98.5	99.0	99.6	99.6	99.6	99.6	99.6	100.

TOTAL NUMBER OF OBSERVATIONS 671

USAF ETAC FORM NO. 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1... | TA...E AF KS | 69-7?,74-79,?1 | AP
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0...-11... HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		7?.4	43.2	44.5	49.2	49.6	50.8	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 20000		47.3	52.7	54.2	59.6	60.2	61.8	62.4	62.5	62.7	62.7	62.7	62.7	62.7	62.7	62.7
≥ 18000		52.6	58.7	6 .2	66.0	66.6	68.4	69.0	69.1	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 16000		52.6	58.7	6 .2	66.0	66.8	68.4	69.0	69.2	69.3	69.3	69.3	69.3	69.3	69.3	69.3
≥ 14000		54.2	6 .6	65.1	67.9	69.7	71.4	71.9	71.2	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 12000		55.3	62.4	63.6	7 .2	72.7	72.6	73.2	73.4	73.5	73.5	73.5	73.5	73.5	73.5	73.5
≥ 10000		57.8	64.4	65.9	72.3	73.1	75.2	75.5	75.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 9000		57.8	64.4	65.9	72.3	73.1	75.2	75.5	75.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 8000		59.9	65.9	67.3	73.8	74.5	76.4	77.0	77.2	77.3	77.3	77.3	77.3	77.3	77.3	77.3
≥ 7000		59.3	66.8	68.2	75.0	75.7	77.6	78.2	78.3	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 6000		59.7	67.3	69.1	75.7	76.4	78.3	78.9	79.1	79.2	79.2	79.2	79.2	79.2	79.2	79.2
≥ 5000		59.7	67.5	69.3	76.0	76.7	78.6	79.2	79.4	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 4500		59.7	67.5	69.3	76.0	76.7	78.6	79.2	79.4	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 4000		6 .9	68.7	70.1	77.6	78.3	8 .4	81.0	81.1	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 3500		61.9	69.7	71.2	78.8	79.5	81.6	82.1	82.3	82.4	82.4	82.4	82.4	82.4	82.4	82.4
≥ 3000		64.9	73.2	74.7	82.6	83.5	85.5	86.2	86.4	86.5	86.5	86.5	86.5	86.5	86.5	86.5
≥ 2500		67.3	76.1	77.5	85.7	87.6	89.6	90.3	90.5	90.6	90.6	90.6	90.6	90.6	90.6	90.6
≥ 2000		68.8	77.9	79.5	89.9	91.8	92.8	93.6	93.7	93.9	93.9	93.9	93.9	93.9	93.9	93.9
≥ 1800		69.4	78.6	80.2	91.9	91.8	93.9	94.6	94.7	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 1500		70.3	79.8	81.4	92.8	93.7	96.0	96.8	96.9	97.1	97.1	97.1	97.1	97.1	97.1	97.1
≥ 1200		72.4	82.1	81.8	93.9	94.7	97.4	98.4	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1000		73.4	83.1	81.8	94.0	94.9	97.5	98.8	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 900		73.4	83.1	81.8	94.0	94.9	97.5	98.8	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 800		73.4	83.1	81.8	94.0	95.0	97.7	99.0	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 700		73.4	83.1	81.8	94.0	95.0	97.7	99.0	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 600		73.4	83.1	81.8	94.0	95.0	97.7	99.0	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 500		73.4	83.1	81.8	94.1	95.2	97.8	99.1	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400		73.4	83.1	81.8	94.3	95.3	98.0	99.3	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300		73.4	83.1	81.8	94.3	95.3	98.0	99.3	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 200		73.4	83.1	81.8	94.4	95.5	98.1	99.4	99.6	99.7	99.9	99.9	99.9	99.9	100.0	100.0
≥ 100		73.4	83.1	81.8	94.4	95.5	98.1	99.4	99.6	99.7	99.9	99.9	99.9	99.9	100.0	100.0
≥ 0		73.4	83.1	81.8	94.4	95.5	98.1	99.4	99.6	99.7	99.9	99.9	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS ____ 6...

...AL CLIMATOLOGY BRANCH
...TAC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) FALCON AB CO (STATION NAME) 69-73,74-79,81 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		41.5	43.1	43.6	45.2	45.2	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4
≥ 20000		55.1	56.7	57.2	58.8	58.8	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0	59.0
≥ 18000		61.9	64.	64.5	66.1	66.1	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 16000		62.4	64.5	64.9	66.6	66.6	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7	66.7
≥ 14000		65.4	65.7	66.1	67.8	67.8	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9	67.9
≥ 12000		66.4	67.8	68.2	7 .1	7 .1	7 .3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 10000		68.5	71.6	72.1	74.7	74.8	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.
≥ 9000		68.5	71.6	72.1	74.0	74.0	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.2	74.
≥ 8000		69.7	72.8	73.3	75.2	75.2	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4
≥ 7000		70.6	73.7	74.2	76.1	76.1	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 6000		7 .6	73.7	74.2	76.1	76.1	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.
≥ 5000		71.6	74.8	75.2	77.3	77.3	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.
≥ 4500		71.9	75.1	75.5	77.7	77.6	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8
≥ 4000		74.2	77.3	77.8	80.3	80.3	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 3500		76.4	79.6	80.0	82.8	83.1	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3	83.3
≥ 3000		80.6	84.	84.6	89.0	89.3	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4
≥ 2500		82.8	86.4	87.0	91.8	92.1	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 2000		84.0	88.1	88.8	94.3	94.9	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1800		84.2	88.5	89.3	95.2	95.8	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 1500		84.6	89.3	90.0	97.2	97.9	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 1200		84.8	89.6	90.4	97.6	98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1000		84.8	89.6	90.6	97.9	98.7	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 900		84.8	89.6	90.6	98.1	98.8	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 800		84.8	89.6	90.6	98.1	98.8	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		84.8	89.6	90.6	98.1	98.8	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600		84.8	89.6	90.6	98.1	99.0	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		84.9	89.7	90.7	98.2	99.1	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 400		84.9	89.7	90.7	98.2	99.1	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 300		84.9	89.7	90.7	98.2	99.1	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 200		84.9	89.7	90.7	98.2	99.1	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 100		84.9	89.7	90.7	98.2	99.1	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.
≥ 0		84.9	89.7	90.7	98.2	99.1	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.

TOTAL NUMBER OF OBSERVATIONS 67

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

L FAL CLIMATOLOGY BRANCH
- FE TAC
A ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) TABOO AB KO (STATION NAME) 69-73,74-79,81 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1500-1700 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		53.1	53.4	53.4	54.6	54.6	54.9	54.9	54.9	54.9	54.9	55.1	55.1	55.1	55.1	55.1
≥ 20000		54.7	54.3	54.3	55.5	55.5	55.8	55.8	55.8	55.8	55.8	56.0	56.0	56.0	56.0	56.0
≥ 18000		61.6	61.3	61.3	62.5	62.7	63.0	63.0	63.0	63.0	63.0	63.1	63.1	63.1	63.1	63.1
≥ 16000		61.6	61.3	61.3	62.5	62.7	63.0	63.0	63.0	63.0	63.0	63.1	63.1	63.1	63.1	63.1
≥ 14000		62.1	62.8	62.8	64.0	64.2	64.5	64.5	64.5	64.5	64.5	64.6	64.6	64.6	64.6	64.6
≥ 12000		64.7	64.5	64.5	65.7	65.8	66.1	66.1	66.1	66.1	66.1	66.3	66.3	66.3	66.3	66.3
≥ 10000		67.9	68.7	68.7	69.9	70.0	70.3	70.3	70.3	70.3	70.3	70.4	70.4	70.4	70.4	70.4
≥ 9000		67.9	68.7	68.7	69.9	70.0	70.3	70.3	70.3	70.3	70.3	70.4	70.4	70.4	70.4	70.4
≥ 8000		70.1	70.9	70.9	72.4	72.5	72.8	72.8	72.8	72.8	72.8	73.0	73.0	73.0	73.0	73.0
≥ 7000		70.6	71.3	71.3	72.8	73.0	73.3	73.3	73.3	73.3	73.3	73.4	73.4	73.4	73.4	73.4
≥ 6000		70.9	71.8	71.8	73.3	73.4	73.7	73.7	73.7	73.7	73.7	73.9	73.9	73.9	73.9	73.9
≥ 5000		71.9	73.0	73.0	74.6	74.8	75.1	75.1	75.1	75.1	75.1	75.2	75.2	75.2	75.2	75.2
≥ 4500		72.8	73.9	73.9	75.7	75.8	76.1	76.1	76.1	76.1	76.1	76.3	76.3	76.3	76.3	76.3
≥ 4000		76.1	77.6	77.6	79.9	80.0	80.3	80.3	80.3	80.3	80.3	80.4	80.4	80.4	80.4	80.4
≥ 3500		77.8	79.3	79.3	81.5	81.6	81.9	81.9	81.9	81.9	81.9	82.1	82.1	82.1	82.1	82.1
≥ 3000		81.6	83.9	84.5	87.5	87.8	88.1	88.1	88.1	88.1	88.1	88.2	88.2	88.2	88.2	88.2
≥ 2500		83.7	86.6	87.3	91.0	91.5	91.8	91.8	91.8	91.8	91.8	91.9	91.9	91.9	91.9	91.9
≥ 2000		85.4	89.3	90.0	94.2	94.9	95.4	95.4	95.4	95.4	95.4	95.5	95.5	95.5	95.5	95.5
≥ 1800		85.7	89.5	90.6	95.1	95.8	96.3	96.3	96.3	96.3	96.3	96.4	96.4	96.4	96.4	96.4
≥ 1500		86.3	90.1	91.3	97.2	97.9	98.4	98.5	98.5	98.5	98.5	98.7	98.7	98.7	98.7	98.7
≥ 1200		86.3	90.3	91.6	97.5	98.4	98.8	99.0	99.1	99.1	99.1	99.3	99.3	99.3	99.3	99.3
≥ 1000		86.3	90.3	91.6	97.8	98.7	99.1	99.3	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 900		86.3	90.3	91.6	97.8	98.7	99.1	99.3	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 800		86.3	90.3	91.6	97.8	98.7	99.1	99.3	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 700		86.3	90.3	91.6	97.8	98.7	99.1	99.3	99.4	99.4	99.4	99.6	99.6	99.6	99.6	99.6
≥ 600		86.3	90.3	91.6	97.9	98.8	99.3	99.4	99.6	99.6	99.6	99.7	99.7	99.7	99.7	99.7
≥ 500		86.3	90.3	91.6	97.9	98.8	99.3	99.4	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9
≥ 400		86.3	90.3	91.6	97.9	98.8	99.3	99.4	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9
≥ 300		86.3	90.3	91.6	97.9	98.8	99.3	99.4	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9
≥ 200		86.3	90.3	91.6	97.9	98.8	99.3	99.4	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9
≥ 100		86.3	90.3	91.6	97.9	98.8	99.3	99.4	99.6	99.6	99.7	99.9	99.9	99.9	99.9	99.9
≥ 0		86.3	90.3	91.6	98.1	99.0	99.4	99.6	99.7	99.7	99.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 67

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY ...CH
...TAC
...CATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1... (STATION) 14550 AB KD (STATION NAME) 69-70,74-79,81 (YEARS) AP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1300-1600 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥⅛	0
NO CEILING		43.9	43.3	43.3	44.0	44.0	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4
≥ 20000		54.5	55.3	55.3	56.1	56.1	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6
≥ 18000		61.7	61.9	61.6	62.9	62.9	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3
≥ 16000		61.2	61.3	61.9	63.1	63.1	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5
≥ 14000		61.9	62.6	62.6	63.8	63.8	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 12000		62.3	63.1	63.1	64.2	64.2	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6	64.6
≥ 10000		67.5	68.5	68.5	69.8	69.8	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 9000		67.5	68.5	68.5	69.8	69.8	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 8000		71.1	71.4	71.4	72.7	72.7	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2
≥ 7000		72.3	72.6	72.6	72.9	72.9	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 6000		72.3	72.6	72.6	73.9	73.9	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3
≥ 5000		72.9	73.3	73.3	74.6	74.6	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 4500		72.3	73.7	73.7	75.0	75.0	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5	75.5
≥ 4000		76.6	77.1	77.1	78.4	78.6	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1	79.1
≥ 3500		77.2	78.8	78.8	80.1	80.4	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8	80.8
≥ 3000		81.2	82.0	82.3	83.4	83.7	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1	86.1
≥ 2500		83.0	85.3	85.7	88.5	89.2	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6	89.6
≥ 2000		84.0	87.0	87.6	91.3	92.1	92.5	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9
≥ 1800		84.7	87.7	88.3	92.1	92.8	93.2	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7	93.7
≥ 1500		85.1	88.9	90.0	94.9	95.7	96.1	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 1200		85.6	89.3	9 .6	95.7	96.4	96.8	97.3	97.3	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1000		85.6	89.3	9 .6	96.0	96.7	97.1	97.7	97.7	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 900		85.6	89.3	9 .6	96.0	96.7	97.1	97.7	97.7	96.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 800		85.6	89.3	9 .6	96.0	96.7	97.1	97.7	97.7	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 700		85.6	89.3	9 .6	96.0	96.7	97.1	97.7	97.7	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 600		85.6	89.3	9 .6	96.2	97.0	97.4	98.0	98.0	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 500		85.7	89.5	91.1	96.7	97.4	97.8	98.4	98.4	99.0	99.0	99.1	99.4	99.4	99.4	99.4
≥ 400		85.7	89.5	91.1	96.7	97.4	97.8	98.4	98.4	99.0	99.0	99.1	99.4	99.4	99.4	99.4
≥ 300		85.7	89.5	91.1	96.7	97.4	97.8	98.4	98.4	99.0	99.0	99.1	99.4	99.4	99.4	99.4
≥ 200		85.7	89.8	91.3	97.3	98.0	98.4	99.0	99.0	99.6	99.6	99.7	100.0	100.0	100.0	100.0
≥ 100		85.7	89.8	91.3	97.3	98.0	98.4	99.0	99.0	99.6	99.6	99.7	100.0	100.0	100.0	100.0
≥ 0		85.7	89.8	91.3	97.3	98.0	98.4	99.0	99.0	99.6	99.6	99.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 693

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

- 1. (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0100-2300 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		49.6	5 .4	50.4	51.2	51.2	51.3	51.3	51.3	51.3	51.3	[illegible]3	51.3	51.3	51.3	[illegible]1.3
≥ 20000		58.1	59.9	59.9	60.7	60.7	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8
≥ 18000		62.1	63.3	63.8	64.9	64.9	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1
≥ 16000		62.3	64.1	64.1	65.2	65.2	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4
≥ 14000		63.2	64.9	64.9	66.1	66.1	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 12000		64.1	65.8	65.8	67.1	67.1	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2	67.2
≥ 10000		68.0	70.0	70.0	71.2	71.2	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 9000		68.0	70.0	70.0	71.2	71.2	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3
≥ 8000		71.2	73.1	73.1	74.3	74.3	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 7000		71.4	73.4	73.4	74.6	74.6	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 6000		72.0	74.0	74.0	75.1	75.1	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 5000		72.0	74.3	74.0	75.1	75.1	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 4500		72.0	74.0	74.0	75.1	75.1	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 4000		73.5	75.6	75.6	76.8	76.8	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9
≥ 3500		73.8	75.9	76.0	77.2	77.2	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4
≥ 3000		81.7	83.9	84.6	86.7	86.7	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 2500		84.0	86.2	86.9	92.5	92.5	92.6	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 2000		85.1	87.9	90.7	94.8	94.8	95.0	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.3
≥ 1800		85.2	9 .1	90.8	95.0	95.3	95.6	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0	96.0
≥ 1500		85.5	91.3	92.0	96.2	96.4	96.7	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1200		85.9	91.7	92.9	97.6	98.2	98.7	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 1000		85.9	91.7	93.2	97.9	98.5	99.0	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 900		85.9	91.7	93.2	97.9	98.5	99.0	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 800		85.9	91.7	93.2	97.9	98.5	99.0	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		86.1	91.9	93.3	98.1	98.7	99.1	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 600		86.1	91.9	93.3	98.1	98.7	99.1	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500		86.1	91.9	93.3	98.1	98.7	99.1	99.6	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9
≥ 400		86.1	91.9	93.3	98.1	98.7	99.1	99.6	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9
≥ 300		86.1	91.9	93.3	98.1	98.7	99.1	99.6	99.6	99.7	99.7	99.7	99.9	99.9	99.9	99.9
≥ 200		86.2	92.0	93.5	98.2	98.8	99.3	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100		86.2	92.0	93.5	98.2	98.8	99.3	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0		86.2	92.1	93.5	98.2	98.8	99.3	99.7	99.7	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 67[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | APR (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		43.5	45.9	46.1	48.6	48.7	49.2	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5	49.5
≥ 20000		53.1	55.9	56.2	58.8	58.9	59.6	59.8	59.9	59.9	59.9	60.0	60.0	60.0	60.0	60.0
≥ 18000		58.6	61.8	62.1	65.0	65.2	65.9	66.2	66.2	66.2	66.3	66.3	66.3	66.3	66.3	66.3
≥ 16000		58.8	61.9	62.2	65.1	65.3	66.0	66.3	66.3	66.4	66.4	66.4	66.4	66.4	66.4	66.4
≥ 14000		59.0	62.9	63.2	66.3	66.4	67.1	67.4	67.5	67.5	67.5	67.6	67.6	67.6	67.6	67.6
≥ 12000		61.0	64.2	64.5	67.6	67.8	68.5	68.8	68.8	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 10000		64.5	68.7	68.3	71.5	71.7	72.4	72.7	72.7	72.8	72.8	72.8	72.8	72.8	72.8	72.9
≥ 9000		64.5	68.	68.3	71.5	71.7	72.4	72.7	72.7	72.8	72.8	72.8	72.8	72.8	72.8	72.9
≥ 8000		66.8	71.5	70.8	74.1	74.3	75.0	75.3	75.3	75.4	75.4	75.4	75.4	75.4	75.4	75.5
≥ 7000		67.2	71.3	71.3	74.7	74.8	75.6	75.9	75.9	75.9	76.0	76.0	76.0	76.0	76.0	76.0
≥ 6000		67.6	71.4	71.7	75.1	75.3	76.0	76.3	76.3	76.4	76.4	76.4	76.4	76.4	76.4	76.5
≥ 5000		68.0	71.9	72.2	75.7	75.9	76.6	76.9	76.9	77.0	77.0	77.0	77.0	77.0	77.0	77.1
≥ 4500		69.2	72.1	72.4	75.9	76.1	76.8	77.1	77.2	77.2	77.2	77.2	77.2	77.2	77.2	77.3
≥ 4000		70.2	74.2	74.5	78.2	78.4	79.1	79.4	79.5	79.5	79.6	79.6	79.6	79.6	79.6	79.6
≥ 3500		71.4	75.4	75.7	79.6	79.8	80.6	80.9	80.9	80.9	81.0	81.0	81.0	81.0	81.0	81.0
≥ 3000		75.9	80.5	81.1	85.9	86.1	86.9	87.2	87.3	87.3	87.3	87.4	87.4	87.4	87.4	87.4
≥ 2500		78.1	83.5	84.1	89.9	90.3	91.0	91.4	91.4	91.4	91.5	91.5	91.5	91.5	91.5	91.5
≥ 2000		79.2	85.1	85.9	92.6	93.1	93.9	94.3	94.4	94.4	94.5	94.5	94.5	94.5	94.5	94.5
≥ 1800		79.6	85.6	86.4	93.2	93.8	94.7	95.2	95.2	95.2	95.3	95.3	95.3	95.3	95.3	95.3
≥ 1500		80.0	86.3	87.2	94.9	95.5	96.5	97.0	97.0	97.1	97.1	97.1	97.1	97.1	97.1	97.2
≥ 1200		80.2	86.6	87.6	95.5	96.2	97.3	97.9	97.9	98.1	98.1	98.2	98.2	98.2	98.2	98.2
≥ 1000		80.2	86.7	87.9	96.0	96.6	97.8	98.4	98.5	98.7	98.7	98.8	98.8	98.8	98.6	98.8
≥ 900		80.2	86.7	87.9	96.0	96.6	97.8	98.5	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800		80.2	86.7	87.9	96.0	96.7	97.8	98.5	98.5	98.8	98.8	98.9	98.9	98.9	98.9	98.9
≥ 700		80.2	86.7	87.9	96.1	96.8	98.0	98.6	98.7	98.9	99.0	99.0	99.0	99.0	99.0	99.1
≥ 600		80.2	86.7	87.9	96.2	96.9	98.1	98.7	98.8	99.0	99.1	99.1	99.1	99.1	99.1	99.2
≥ 500		80.3	86.8	88.1	96.4	97.1	98.3	99.0	99.1	99.3	99.4	99.4	99.5	99.5	99.5	99.6
≥ 400		80.3	86.8	88.1	96.4	97.1	98.3	99.0	99.1	99.4	99.5	99.5	99.6	99.6	99.6	99.6
≥ 300		80.3	86.8	88.1	96.4	97.1	98.3	99.0	99.1	99.4	99.5	99.5	99.6	99.6	99.6	99.6
≥ 200		80.3	86.9	88.2	96.7	97.4	98.6	99.3	99.4	99.7	99.8	99.8	99.9	99.9	99.9	100.0
≥ 100		80.3	86.9	88.3	96.7	97.4	98.6	99.3	99.4	99.7	99.8	99.8	99.9	99.9	99.9	100.0
≥ 0		80.4	86.9	88.3	96.7	97.4	98.7	99.4	99.5	99.7	99.8	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 5371

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
USAFETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | TAFB AB KC (STATION NAME) | 69-70,74-79,81 (YEARS) | MAY (MONTH)

[illegible] (HOURS LST)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		54.6	56.7	56.7	58.3	58.3	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5
≥ 20000		61.7	63.9	63.9	65.5	65.5	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7	65.7
≥ 18000		66.0	68.2	68.2	70.1	70.1	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 16000		66.2	68.2	68.2	70.1	70.1	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 14000		66.6	68.8	68.8	70.8	70.8	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 12000		66.5	70.7	70.7	72.8	72.8	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 10000		71.1	73.5	73.5	75.6	75.6	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7	75.7
≥ 9000		71.3	73.6	73.6	75.7	75.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 8000		73.6	76.0	76.0	78.1	78.1	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2	78.2
≥ 7000		74.7	77.3	77.3	79.4	79.4	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 6000		75.0	77.6	77.6	79.8	79.8	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
≥ 5000		75.4	78.1	78.1	80.3	80.3	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 4500		75.4	78.1	78.1	80.3	80.3	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4	80.4
≥ 4000		77.6	80.3	80.3	82.5	82.5	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8
≥ 3500		77.6	80.3	80.3	82.5	82.5	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8
≥ 3000		82.0	85.9	86.3	89.0	89.0	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2	89.2
≥ 2500		83.9	88.1	89.0	93.7	93.7	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0
≥ 2000		85.1	89.7	90.7	96.5	96.6	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1800		85.1	89.7	90.7	96.8	96.9	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1500		86.0	90.7	91.8	98.8	99.0	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 1200		86.1	90.7	91.8	98.8	99.1	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 1000		86.1	90.7	91.8	98.8	99.1	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 900		86.0	90.7	91.8	98.8	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 800		86.0	90.7	91.8	98.8	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 700		86.0	90.7	91.8	98.8	99.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 600		86.0	90.7	91.8	99.0	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		86.0	90.7	91.8	99.0	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		86.0	90.7	91.8	99.0	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		86.0	90.7	91.8	99.0	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		86.0	90.7	91.8	99.0	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		86.0	90.7	91.8	99.0	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		86.0	90.7	91.8	99.0	99.4	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 679

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...ERAL CLIMATOLOGY BRANCH
...TAC
...EATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

- 1... (STATION) | ...AEGU AB KJ (STATION NAME) | 69-70,74-79,81 (YEARS) | MAY (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

700-1501 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		49.0	50.4	50.6	52.8	53.0	53.8	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9
≥ 20000		55.2	56.9	57.1	59.7	59.9	60.7	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8
≥ 18000		59.7	61.5	61.7	65.2	65.4	66.2	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 16000		59.7	61.5	61.7	65.2	65.4	66.2	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 14000		60.1	62.0	62.1	65.6	65.8	66.6	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 12000		61.4	63.2	63.4	66.9	67.1	67.9	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0	68.0
≥ 10000		64.9	66.9	67.0	70.7	70.8	71.7	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8
≥ 9000		64.9	66.9	67.0	70.7	70.8	71.7	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8	71.8
≥ 8000		66.2	70.8	71.0	74.8	74.9	75.8	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9
≥ 7000		66.5	71.3	71.4	75.2	75.4	76.2	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3	76.3
≥ 6000		66.5	71.4	71.5	75.6	75.8	76.6	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8
≥ 5000		66.9	71.8	72.0	76.1	76.2	77.0	77.2	77.2	77.2	77.3	77.3	77.3	77.3	77.3	77.3
≥ 4500		66.9	71.8	72.0	76.1	76.2	77.0	77.2	77.2	77.2	77.5	77.5	77.5	77.5	77.5	77.5
≥ 4000		70.8	74.1	74.2	78.3	78.5	79.4	79.6	79.6	79.6	79.9	79.9	79.9	79.9	79.9	79.9
≥ 3500		70.8	74.1	74.2	78.3	78.5	79.4	79.6	79.6	79.6	79.9	79.9	79.9	79.9	79.9	79.9
≥ 3000		74.9	79.9	80.6	86.3	86.5	87.5	87.6	87.6	87.6	87.9	87.9	87.9	87.9	87.9	88.0
≥ 2500		77.3	83.1	84.1	90.8	91.0	92.1	92.3	92.3	92.3	92.5	92.5	92.5	92.5	92.5	92.7
≥ 2000		78.9	85.1	86.1	94.6	95.2	96.3	96.5	96.5	96.5	96.8	96.8	96.8	96.8	96.8	96.9
≥ 1800		78.9	85.1	86.2	94.9	95.5	96.6	96.8	96.6	96.8	97.0	97.0	97.0	97.0	97.0	97.2
≥ 1500		79.9	86.2	87.3	96.8	97.3	98.7	98.9	98.9	98.9	99.2	99.2	99.2	99.2	99.2	99.3
≥ 1200		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.4
≥ 1000		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.4
≥ 900		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.4
≥ 800		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.3	99.6	99.6	99.6	99.6	99.6	99.7
≥ 700		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.3	99.6	99.6	99.6	99.6	99.6	99.7
≥ 600		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.3	99.6	99.6	99.6	99.6	99.6	99.7
≥ 500		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.3	99.6	99.6	99.6	99.6	99.6	99.7
≥ 400		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.3	99.6	99.6	99.6	99.6	99.6	99.7
≥ 300		79.9	86.2	87.3	96.8	97.3	98.9	99.0	99.0	99.3	99.6	99.6	99.6	99.6	99.6	99.7
≥ 200		79.9	86.2	87.3	97.0	97.6	99.2	99.3	99.3	99.6	99.9	99.9	99.9	99.9	99.9	100.0
≥ 100		79.9	86.2	87.3	97.0	97.6	99.2	99.3	99.3	99.6	99.9	99.9	99.9	99.9	99.9	100.0
≥ 0		79.9	86.2	87.3	97.0	97.6	99.2	99.3	99.3	99.6	99.9	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 713

...AL CLIMATOLOGY BRANCH
...AFETAC
... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

STATION	STATION NAME	YEARS	MONTH
I...	TAEGU AB KO	69-7..,74-79,81	MAY

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

HOURS (LST) 6...-...

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		53.3	3..9	39..	44.1	44.9	45.9	46.9	46..	46.9	47..	47..	47..	47..	47..	47..
≥ 20000		..1	4..3	49..	54.1	55.1	56.1	57.1	57.1	57.1	57.2	57.2	57.2	57..	57..	57..
≥ 18000		48.3	55.1	55.8	62..	62.9	64.1	65.0	65..	65.2	65.3	65.3	65.3	65.3	65.3	65.3
≥ 16000		48.3	55.2	55.9	62.2	63.2	64.3	65.3	65.5	65.5	65.6	65.6	65.6	65.6	65.6	65.6
≥ 14000		49.4	56.4	57.1	63.4	64.3	65.5	66.4	66..	66.6	66.7	66.7	66.7	66.7	66.7	66.7
≥ 12000		49.9	57.3	58..	64.5	65.5	66.7	67.7	67.8	67.8	68..	68..	68..	68..	68..	68..
≥ 10000		52.2	60..	60.7	67.4	68.5	69.8	70.9	71..	71..	71.2	71.2	71.2	71.2	71.2	71.2
≥ 9000		52.2	60..	60.7	67.4	68.5	69.8	7..9	71..	71..	71.2	71.2	71.2	71.2	71.2	71.2
≥ 8000		54.3	62.5	63.2	70.8	71.9	73.1	74.3	74.4	74.4	74.5	74.5	74.5	74.5	74.5	74.5
≥ 7000		54.8	63.1	63.9	71.5	72.6	73.8	75.0	75.1	75.1	75.2	75.2	75.2	75.2	75.2	75.2
≥ 6000		55.2	63.5	64.3	72.0	73.1	74.4	75.5	75.7	75.7	75.8	75.8	75.8	75.8	75.8	75.9
≥ 5000		5..1	64.3	65.2	73.1	74.3	75.5	76.6	76.8	76.8	76.9	76.9	76.9	76.9	76.9	76.9
≥ 4500		56.2	64.5	65.3	73.3	74.4	75.7	76.8	76.9	76.9	77.1	77.1	77.1	77.1	77.1	77.1
≥ 4000		57.1	65.5	66.4	74.7	75.8	77.1	78.2	78.3	7..3	78.5	78.5	78.5	78.5	78.5	78.5
≥ 3500		57.6	66.0	67.1	75.4	76.5	77.8	78.9	79..	79.0	79.2	79.2	79.2	79.2	79.2	79.2
≥ 3000		61.8	7..9	72.3	82.2	83.5	84.9	86.2	86.3	86.3	86.4	86.4	86.4	86.4	86.4	86.4
≥ 2500		63.6	73.7	75.1	85.5	86.7	88.1	89.4	89.5	89.5	89.8	89.8	89.8	89.8	89.8	89.8
≥ 2000		65.2	75.5	76.9	89.2	90.8	92.2	93.4	93.7	93.8	94.1	94.1	94.1	94.1	94.1	94.1
≥ 1800		65.5	75.8	77.2	89.7	91.2	92.6	93.8	94.1	94.3	94.5	94.5	94.5	94.5	94.5	94.5
≥ 1500		66.3	76.9	78.5	91.6	93.3	95.2	96.5	96.8	96.9	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1200		66.3	76.9	78.5	91.6	93.4	95.4	96.8	97.0	97.5	97.9	97.9	97.9	97.9	97.9	97.9
≥ 1000		66.7	77.3	79.0	92.2	94.1	96.1	97.5	97.9	98.3	98.7	98.7	98.7	98.7	98.7	98.7
≥ 900		66.7	77.3	79.0	92.2	94.1	96.1	97.5	97.9	98.3	98.7	98.7	98.7	98.7	98.7	98.7
≥ 800		66.7	77.3	79.0	92.2	94.1	96.4	97.9	98.3	98.7	99.2	99.2	99.2	99.2	99.2	99.2
≥ 700		66.7	77.3	79.0	92.3	94.3	96.5	98.0	98.5	98.9	99.3	99.3	99.3	99.3	99.3	99.3
≥ 600		66.7	77.3	79.0	92.3	94.3	96.5	98.0	98.5	98.9	99.3	99.3	99.3	99.3	99.3	99.3
≥ 500		66.7	77.3	79.0	92.3	94.3	96.5	98.2	98.6	99.0	99.4	99.6	99.6	99.6	99.7	99.7
≥ 400		66.7	77.3	79.0	92.3	94.3	96.5	98.2	98.6	99.0	99.4	99.6	99.6	99.6	99.7	99.9
≥ 300		66.7	77.3	79.0	92.3	94.3	96.5	98.2	98.6	99.0	99.4	99.6	99.6	99.6	99.7	99.9
≥ 200		66.7	77.3	79.0	92.3	94.3	96.5	98.2	98.6	99.0	99.4	99.6	99.6	99.6	99.7	100.0
≥ 100		66.7	77.3	79.0	92.3	94.3	96.5	98.2	98.6	99.0	99.4	99.6	99.6	99.6	99.7	100.0
≥ 0		66.7	77.3	79.0	92.3	94.3	96.5	98.2	98.6	99.0	99.4	99.6	99.6	99.6	99.7	100.0

TOTAL NUMBER OF OBSERVATIONS 715

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 [illegible] STATION | STATION NAME | 69-70, 74-79, 81 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

9 C-11 C HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		37.8	42.2	47.5	45.7	46.7	47.1	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4	47.4
≥ 20000		45.9	51.8	51.1	55.4	56.4	56.8	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1
≥ 18000		52.3	57.5	57.9	62.3	63.3	63.7	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0	64.0
≥ 16000		53.3	58.4	58.6	63.3	64.3	64.7	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 14000		54.6	60.2	61.5	65.4	66.4	66.8	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1	67.1
≥ 12000		56.8	62.7	63.0	68.1	69.1	69.5	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8	69.8
≥ 10000		58.2	65.0	65.4	71.0	72.0	72.4	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7
≥ 9000		58.2	65.0	65.4	71.0	72.0	72.4	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7
≥ 8000		59.4	66.1	66.5	72.6	73.6	74.0	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3
≥ 7000		59.6	66.6	67.2	73.3	74.3	74.7	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 6000		60.8	67.9	68.4	74.5	75.5	75.9	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 5000		61.9	69.5	69.9	76.2	77.2	77.6	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 4500		62.3	69.6	70.0	76.4	77.4	77.8	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1	78.1
≥ 4000		63.9	71.7	72.2	78.8	79.7	80.2	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5
≥ 3500		64.4	72.4	72.9	79.5	80.5	80.9	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 3000		65.1	76.9	78.1	85.6	86.9	87.5	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8	87.8
≥ 2500		70.3	79.5	80.6	89.0	90.2	90.7	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1
≥ 2000		72.2	81.7	83.0	92.1	93.4	94.1	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7	94.7
≥ 1800		72.7	82.4	83.7	92.8	94.1	94.9	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 1500		73.6	83.4	85.0	94.2	95.5	96.5	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1200		73.8	83.7	85.2	94.5	95.8	96.9	97.7	97.9	97.9	97.9	97.9	97.9	97.9	97.9	97.9
≥ 1000		74.3	84.1	85.7	94.9	96.2	97.3	98.2	98.3	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 900		74.3	84.1	85.7	95.1	96.3	97.5	98.3	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 800		74.3	84.2	85.8	95.5	96.9	98.0	99.0	99.2	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 700		74.3	84.2	85.8	95.5	96.9	98.2	99.2	99.3	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 600		74.3	84.2	85.6	95.5	96.9	98.2	99.2	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 500		74.3	84.2	85.8	95.6	97.0	98.3	99.3	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400		74.3	84.2	85.8	95.6	97.2	98.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		74.3	84.2	85.8	95.6	97.2	98.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		74.3	84.2	85.8	95.6	97.2	98.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		74.3	84.2	85.8	95.6	97.2	98.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		74.3	84.2	85.8	95.6	97.2	98.6	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 711

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible] AGGS AS KO STATION NAME | 69-7[illegible],74-79,81 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-[illegible] HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	0
NO CEILING		44.[illegible]	45.4	45.4	45.5	46.5	46.8	46.8	46.[illegible]	46.[illegible]	46.[illegible]	46.[illegible]	46.[illegible]	46.[illegible]	46.8	46.[illegible]
≥ 20000		55.7	57.7	57.7	57.8	58.0	58.2	58.4	58.4	58.4	58.4	58.4	58.4	58.4	58.4	58.[illegible]
≥ 18000		59.6	61.7	61.7	62.[illegible]	62.2	62.4	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.7
≥ 16000		59.9	62.[illegible]	62.[illegible]	62.3	62.4	62.7	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.8	62.[illegible]
≥ 14000		63.1	65.[illegible]	65.2	65.5	65.6	65.9	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.[illegible]
≥ 12000		66.[illegible]	67.[illegible]	67.3	67.9	68.[illegible]	68.3	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.[illegible]
≥ 10000		67.6	70.4	70.4	71.2	71.4	71.6	71.8	71.[illegible]	71.8	71.8	71.8	71.8	71.8	71.8	71.[illegible]
≥ 9000		67.6	70.4	70.4	71.2	71.4	71.6	71.8	71.[illegible]	71.8	71.8	71.8	71.8	71.8	71.8	71.[illegible]
≥ 8000		69.4	71.5	71.5	72.8	72.9	73.2	73.3	73.[illegible]	73.3	73.3	73.3	73.3	73.3	73.3	73.[illegible]
≥ 7000		69.4	71.5	71.5	72.9	73.2	73.5	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.6	73.7
≥ 6000		69.4	72.2	72.2	73.6	73.9	74.2	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.[illegible]
≥ 5000		7[illegible].3	73.6	73.7	75.1	75.4	75.7	75.8	75.[illegible]	75.8	75.8	75.8	75.8	75.8	75.8	76.[illegible]
≥ 4500		7[illegible].5	73.9	74.[illegible]	75.4	75.7	76.0	76.1	76.[illegible]	76.1	76.1	76.1	76.1	76.1	76.1	76.7
≥ 4000		74.3	73.1	78.2	79.6	80.2	80.4	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.[illegible]	80.[illegible]
≥ 3500		76.1	8[illegible].[illegible]	81.[illegible]	81.6	82.1	82.4	82.5	82.[illegible]	82.5	82.5	82.5	82.5	82.[illegible]	82.5	82.7
≥ 3000		8[illegible].6	84.6	85.1	87.4	88.4	88.7	88.8	88.8	88.8	88.8	88.8	88.8	88.5	88.8	99.[illegible]
≥ 2500		93.7	88.[illegible]	88.7	91.[illegible]	92.3	92.6	92.9	92.[illegible]	92.9	92.9	92.9	92.9	92.9	92.9	93.[illegible]
≥ 2000		95.2	9[illegible].[illegible]	91.1	94.3	95.3	95.5	95.8	95.[illegible]	95.9	95.9	95.9	95.9	95.9	95.9	96.1
≥ 1800		95.5	97.9	91.3	94.6	95.5	95.8	96.1	96.1	96.2	96.2	96.2	96.2	96.2	96.[illegible]	96.4
≥ 1500		85.9	91.[illegible]	92.2	96.2	97.2	97.6	97.9	97.9	98.[illegible]	98.0	98.0	98.[illegible]	98.[illegible]	98.[illegible]	98.[illegible]
≥ 1200		96.5	97.[illegible]	92.7	96.9	97.9	98.3	98.7	98.7	98.9	98.9	98.9	98.9	98.9	98.9	99.[illegible]
≥ 1000		86.6	92.3	92.9	97.1	98.0	98.5	98.9	98.9	99.0	99.[illegible]	99.0	99.[illegible]	99.[illegible]	99.[illegible]	99.2
≥ 900		96.5	97.[illegible]	92.9	97.3	98.3	98.7	99.2	99.[illegible]	99.3	99.3	99.3	99.3	99.3	99.3	99.4
≥ 800		76.6	92.[illegible]	92.9	97.3	98.3	98.9	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.7
≥ 700		96.6	97.3	92.9	97.3	98.3	98.9	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.7
≥ 600		96.7	97.5	93.0	97.5	98.5	99.0	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.[illegible]
≥ 500		96.7	97.5	93.[illegible]	97.5	98.5	99.0	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.[illegible]
≥ 400		36.7	97.5	93.0	97.5	98.5	99.0	99.6	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.9
≥ 300		86.9	97.6	93.2	97.6	98.6	99.2	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	[illegible].[illegible]
≥ 200		86.9	97.6	93.2	97.6	98.6	99.2	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	[illegible].0
≥ 100		86.9	97.6	93.2	97.6	98.6	99.2	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	[illegible].[illegible]
≥ 0		86.9	97.6	93.2	97.6	98.6	99.2	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	[illegible].[illegible]

TOTAL NUMBER OF OBSERVATIONS 71[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...NAL CLIMATOLOGY BRANCH
...AC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILIT

1 | TAEGU AB, KO | 69-71, 74-77, 81 | MAY

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

~~1500-1700~~
HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		44.5	44.[illegible]	44.9	45.5	45.5	46.0	46.0	46.[illegible]	46.0	46.0	46.0	46.[illegible]	46.	[illegible]	[illegible]
≥ 20000		56.6	57.4	57.4	58.1	58.1	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	[illegible]
≥ 18000		61.2	62.	62.	62.9	62.9	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.[illegible]	63.6	[illegible]
≥ 16000		61.2	62.	62.[illegible]	62.9	62.9	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.5	63.[illegible]	[illegible]
≥ 14000		64.1	64.	64.[illegible]	64.8	64.8	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.[illegible]	65.[illegible]	[illegible]
≥ 12000		66.5	67.3	67.3	68.3	68.3	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.9	[illegible]	[illegible]
≥ 10000		68.8	69.7	69.8	70.9	70.9	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.6	71.6	71.
≥ 9000		68.8	69.7	69.8	70.9	70.9	71.5	71.5	71.5	71.5	71.5	71.5	71.5	71.[illegible]	71.[illegible]	71.
≥ 8000		70.2	71.2	71.3	72.6	72.6	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.3	73.3	73.
≥ 7000		70.9	71.9	72.[illegible]	73.4	73.4	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.1	74.1	74.
≥ 6000		71.3	72.3	72.5	73.9	73.9	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.5	74.5	74.
≥ 5000		73.0	74.3	74.4	75.9	75.9	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.6	76.6	76.
≥ 4500		75.7	76.9	75.1	76.8	76.8	77.3	77.3	77.3	77.3	77.3	77.3	77.3	77.5	77.5	77
≥ 4000		77.7	79.0	79.1	81.5	81.5	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.2	82.2	[illegible]
≥ 3500		79.1	80.4	80.5	83.0	83.0	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.7	83.7	[illegible]
≥ 3000		83.6	84.4	84.7	88.3	88.5	89.0	89.0	89.0	89.0	89.[illegible]	89.[illegible]	89.[illegible]	89.2	89.2	89.
≥ 2500		86.1	87.1	87.3	91.4	91.5	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.4	92.4	92.
≥ 2000		88.5	89.3	89.6	94.0	94.2	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.3	95.3	95.
≥ 1800		89.1	89.8	9[illegible].3	94.9	95.1	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.4	96.4	96.
≥ 1500		90.6	9[illegible].5	91.1	96.1	96.4	97.6	97.6	97.6	97.6	97.8	97.8	97.8	97.9	97.9	97.
≥ 1200		98.[illegible]	91.1	91.7	96.8	97.1	98.5	98.6	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.[illegible]	99.
≥ 1000		98.3	91.2	91.8	96.9	97.2	98.6	99.0	99.4	99.4	99.4	99.4	99.4	99.[illegible]	99.[illegible]	99.
≥ 900		98.3	91.2	91.8	96.9	97.2	98.6	99.0	99.4	99.4	99.4	99.4	99.4	99.6	99.[illegible]	99.
≥ 800		98.3	91.2	91.8	97.1	97.4	98.7	99.2	99.6	99.6	99.6	99.6	99.6	99.7	99.7	99.
≥ 700		98.3	91.2	91.8	97.1	97.4	98.7	99.2	99.6	99.6	99.6	99.6	99.6	99.7	99.7	99.
≥ 600		98.3	91.2	91.8	97.1	97.4	98.7	99.2	99.6	99.6	99.6	99.6	99.6	99.7	99.7	99.
≥ 500		98.3	91.2	91.8	97.1	97.4	98.7	99.2	99.6	99.6	99.6	99.6	99.6	99.7	99.7	99.
≥ 400		98.3	91.2	91.8	97.1	97.4	98.7	99.2	99.6	99.6	99.6	99.6	99.6	99.7	99.7	99.
≥ 300		98.3	91.2	91.8	97.2	97.5	98.9	99.3	99.7	99.7	99.7	99.7	99.7	99.9	99.9	99.
≥ 200		98.3	91.2	91.8	97.2	97.5	98.9	99.3	99.7	99.7	99.7	99.7	99.7	99.9	99.9	99.
≥ 100		98.3	91.2	91.8	97.2	97.5	98.9	99.3	99.7	99.7	99.7	99.7	99.7	99.9	99.9	99.
≥ 0		98.3	91.4	91.9	97.4	97.6	99.[illegible]	99.4	99.9	99.9	99.9	99.9	99.9	100.0	100.0	10

TOTAL NUMBER OF OBSERVATIONS 7

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...TAL CLIMATOLOGY BRANCH
...F TAC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 | TAEGU AB KO | 69-73,74-79,81 | MAY

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		44.5	45.7	45.7	46.0	46.4	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5	46.5
≥ 20000		56.3	56.5	56.5	57.0	57.4	57.5	57.5	57.5	57.5	57.5	57.5	57.5	57.5	57.5	57.5
≥ 18000		64.1	64.6	64.6	65.1	65.5	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6
≥ 16000		64.1	64.6	64.6	65.1	65.5	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6
≥ 14000		65.9	66.4	66.4	66.9	67.3	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4	67.4
≥ 12000		66.4	66.8	66.8	67.3	67.9	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 10000		69.7	71.2	71.2	71.8	72.2	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4
≥ 9000		69.7	71.2	71.2	71.8	72.2	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4
≥ 8000		73.9	74.4	74.4	75.1	75.5	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6	75.6
≥ 7000		73.9	75.3	75.3	76.0	76.4	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 6000		74.7	76.1	76.1	77.2	77.6	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8	77.8
≥ 5000		75.6	77.6	77.6	78.7	79.1	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2
≥ 4500		79.9	77.9	77.9	79.0	79.4	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 4000		79.9	80.5	80.5	81.5	81.9	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1	82.1
≥ 3500		79.5	80.7	80.7	81.9	82.3	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5	82.5
≥ 3000		83.5	86.4	86.7	89.6	90.0	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.3
≥ 2500		86.7	89.7	86.9	92.2	93.0	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 2000		87.2	90.7	91.0	95.4	96.2	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 1800		87.2	90.7	91.0	95.6	96.5	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8	96.8
≥ 1500		87.7	91.6	91.9	96.6	97.8	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 1200		87.9	91.9	92.2	97.3	98.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1000		87.9	91.9	92.2	97.3	98.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 900		87.9	91.9	92.2	97.3	98.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 800		87.9	91.9	92.2	97.3	98.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		87.9	91.9	92.2	97.3	98.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600		87.9	91.9	92.2	97.3	98.5	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 500		88.0	92.0	92.3	97.4	98.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400		88.0	92.0	92.3	97.4	98.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300		88.0	92.0	92.3	97.4	98.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 200		88.0	92.0	92.3	97.4	98.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 100		88.0	92.0	92.3	97.4	98.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 0		88.2	92.2	92.5	97.6	98.8	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 74...

USAF ETAC FORM 10L 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible] STATION NAME | 69-73, 74-79, c1 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS LST

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
≥ 20000		[illegible]	57.3	57.3	56.5	56.5	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	[illegible]
≥ 18000		[illegible]	64.3	64.3	65.8	65.8	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	[illegible]
≥ 16000		63.3	64.3	64.3	65.8	65.8	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	[illegible]
≥ 14000		63.7	64.7	64.7	66.4	66.4	66.5	66.5	66.5	66.5	66.5	66.5	66.5	66.5	66.5	[illegible]
≥ 12000		66.2	67.4	67.4	69.1	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	[illegible]
≥ 10000		70.1	71.6	71.6	73.2	73.2	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	[illegible]
≥ 9000		70.1	71.6	71.6	73.2	73.2	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	[illegible]
≥ 8000		71.9	73.4	73.4	75.0	75.0	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	75.1	[illegible]
≥ 7000		72.5	74.2	74.2	76.0	76.0	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	[illegible]
≥ 6000		73.2	74.8	74.8	76.7	76.7	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9	[illegible]
≥ 5000		73.6	75.4	75.4	77.3	77.3	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	77.4	[illegible]
≥ 4500		73.9	75.5	75.5	77.4	77.4	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	[illegible]
≥ 4000		76.6	78.2	78.2	80.5	80.5	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	80.6	[illegible]
≥ 3500		76.9	78.7	78.7	81.0	81.0	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	[illegible]
≥ 3000		83.6	86.3	86.1	89.1	89.1	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	89.4	[illegible]
≥ 2500		86.6	88.2	88.3	92.2	92.3	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	[illegible]
≥ 2000		86.9	89.9	90.4	95.7	95.8	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2	[illegible]
≥ 1800		87.1	90.0	90.6	95.8	96.0	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4	[illegible]
≥ 1500		88.3	91.0	91.5	98.0	98.1	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	[illegible]
≥ 1200		88.3	91.0	91.5	96.4	98.5	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	[illegible]
≥ 1000		88.3	91.1	91.7	98.5	98.7	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	[illegible]
≥ 900		88.3	91.1	91.7	98.5	98.7	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	[illegible]
≥ 800		88.3	91.1	91.7	98.5	98.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 700		88.3	91.1	91.7	98.5	98.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 600		88.3	91.1	91.7	98.5	98.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 500		88.3	91.1	91.7	98.5	98.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 400		88.3	91.1	91.7	98.5	98.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 300		88.3	91.1	91.7	98.5	98.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 200		88.3	91.3	91.8	98.7	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	[illegible]
≥ 100		88.3	91.3	91.8	98.7	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	[illegible]
≥ 0		88.3	91.3	91.8	98.7	99.1	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	[illegible]

TOTAL NUMBER OF OBSERVATIONS 743

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
...SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] AFB, KS STATION NAME | 69-70,74-79,81 YEARS | MAY MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	
NO CEILING		44.0	45.7	46.8	48.5	48.8	49.2	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4
≥ 20000		55.6	56.1	56.2	58.2	58.6	59.0	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2
≥ 18000		60.2	61.9	62.0	64.4	64.7	65.2	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4	65.4
≥ 16000		60.2	62.0	62.2	64.6	64.9	65.4	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6	65.6
≥ 14000		62.6	63.5	63.5	65.9	66.3	66.7	66.9	66.9	66.9	67.0	67.0	67.0	67.0	67.0	67.0
≥ 12000		62.5	65.4	65.5	68.1	68.4	68.9	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.1	69.2
≥ 10000		66.4	67.5	68.7	71.5	71.8	72.3	72.5	72.5	72.5	72.5	72.5	72.5	72.6	72.6	72.6
≥ 9000		66.4	68.5	68.7	71.5	71.8	72.3	72.5	72.5	72.5	72.6	72.6	72.6	72.6	72.6	72.6
≥ 8000		67.4	70.7	70.9	73.9	74.3	74.8	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
≥ 7000		67.9	71.4	71.6	74.7	75.1	75.5	75.7	75.8	75.8	75.8	75.8	75.8	75.8	75.8	75.8
≥ 6000		68.5	72.0	72.2	75.4	75.8	76.3	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5
≥ 5000		68.4	73.1	73.3	76.6	76.9	77.4	77.6	77.6	77.6	77.7	77.7	77.7	77.7	77.7	77.7
≥ 4500		69.0	73.3	73.5	76.8	77.2	77.6	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	78.0
≥ 4000		72.0	75.9	76.1	79.7	80.1	80.6	80.8	80.8	80.8	80.9	80.9	80.9	80.9	80.9	80.9
≥ 3500		72.6	76.6	76.8	80.4	80.8	81.3	81.5	81.5	81.5	81.6	81.6	81.6	81.6	81.6	81.6
≥ 3000		77.2	81.9	82.5	87.2	87.7	88.3	88.5	88.6	88.6	88.6	88.6	88.6	88.6	88.6	88.7
≥ 2500		79.4	84.6	85.3	90.8	91.3	91.9	92.2	92.2	92.2	92.3	92.3	92.3	92.3	92.3	92.3
≥ 2000		80.9	86.6	87.4	94.0	94.7	95.4	95.6	95.7	95.7	95.8	95.8	95.8	95.8	95.8	95.8
≥ 1800		81.2	86.8	87.6	94.4	95.1	95.8	96.1	96.1	96.2	96.3	96.3	96.3	96.3	96.3	96.3
≥ 1500		81.9	87.8	88.7	96.0	96.8	97.8	98.1	98.1	98.2	98.2	98.2	98.2	98.2	98.2	98.3
≥ 1200		82.1	88.0	88.9	96.4	97.2	98.3	98.7	98.8	98.8	98.9	98.9	98.9	98.9	98.9	99.0
≥ 1000		82.2	88.1	89.0	96.6	97.4	98.5	98.9	99.0	99.1	99.2	99.2	99.2	99.2	99.2	99.3
≥ 900		82.2	88.1	89.0	96.6	97.5	98.6	99.0	99.1	99.2	99.3	99.3	99.3	99.3	99.3	99.3
≥ 800		82.2	88.2	89.1	96.7	97.6	98.8	99.2	99.4	99.5	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		82.2	88.2	89.1	96.7	97.6	98.8	99.3	99.4	99.5	99.6	99.6	99.6	99.6	99.6	99.7
≥ 600		82.3	88.2	89.1	96.7	97.6	98.8	99.3	99.4	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500		82.3	88.2	89.1	96.8	97.7	98.9	99.4	99.5	99.6	99.7	99.7	99.7	99.7	99.8	99.8
≥ 400		82.3	88.2	89.1	96.9	97.7	98.9	99.4	99.5	99.7	99.7	99.8	99.8	99.8	99.8	99.9
≥ 300		82.3	88.2	89.1	96.9	97.7	99.0	99.4	99.6	99.7	99.8	99.8	99.8	99.8	99.8	99.9
≥ 200		82.3	88.2	89.1	96.9	97.8	99.0	99.5	99.6	99.7	99.8	99.8	99.8	99.8	99.9	99.9
≥ 100		82.3	88.2	89.1	96.9	97.8	99.0	99.5	99.6	99.8	99.8	99.9	99.9	99.9	99.9	100.0
≥ 0		82.3	88.3	89.2	96.9	97.8	99.0	99.5	99.7	99.8	99.9	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 5735

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
... ...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | ...AEDC AP, KS (STATION NAME) | 68-70, 74-79 (YEARS) | ...JAN... (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...00-... (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		41.4	47.7	48.1	48.3	48.3	48.6	48.6	48.6	48.6	48.6	48.6	48.6	48.6	48.6	48.6
≥ 20000		49.3	49.8	50.3	50.3	50.3	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7
≥ 18000		53.5	54.8	55.1	55.3	55.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3
≥ 16000		53.7	55.0	55.2	55.4	55.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4
≥ 14000		53.4	55.8	55.9	55.9	55.9	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2	59.2
≥ 12000		54.0	57.2	57.3	57.5	57.5	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8	60.8
≥ 10000		57.7	60.8	60.2	63.8	63.8	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1
≥ 9000		57.7	61.3	60.2	63.8	63.8	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1
≥ 8000		61.4	64.1	64.2	68.0	68.0	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 7000		61.6	64.2	64.4	68.1	68.1	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4	68.4
≥ 6000		61.6	64.2	64.4	68.3	68.3	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.6
≥ 5000		61.9	64.7	64.8	68.9	68.9	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2
≥ 4500		61.9	64.7	64.8	68.9	68.9	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2	69.2
≥ 4000		64.2	68.1	68.1	72.2	72.2	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 3500		65.6	69.5	69.7	73.8	73.8	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1
≥ 3000		72.2	77.6	78.3	84.2	84.4	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7	84.7
≥ 2500		75.5	81.7	82.7	89.8	90.0	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5	90.5
≥ 2000		77.0	84.2	85.5	93.6	94.2	94.8	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2
≥ 1800		77.8	85.2	86.6	94.7	95.3	95.9	95.9	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 1500		77.8	86.3	87.7	96.7	97.3	98.0	98.0	98.3	98.3	98.3	98.3	98.3	98.3	98.3	98.3
≥ 1200		77.8	86.3	87.7	96.9	97.5	98.3	98.6	98.9	98.9	98.9	98.9	98.9	98.9	98.9	98.9
≥ 1000		77.8	86.3	87.7	97.2	97.6	98.6	98.9	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 900		77.8	86.3	87.7	97.2	97.8	98.6	98.9	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 800		77.8	86.3	87.7	97.2	97.8	98.6	98.9	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 700		77.8	86.3	87.7	97.2	97.8	98.6	98.9	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 600		77.8	86.3	87.7	97.2	97.8	98.6	98.9	99.2	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 500		77.8	86.3	87.7	97.2	97.8	98.6	98.9	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400		77.8	86.3	87.7	97.2	97.8	98.6	98.9	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 300		77.8	86.3	87.7	97.2	97.8	98.6	98.9	99.7	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 200		78.0	86.4	87.8	97.3	98.0	98.6	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		78.0	86.4	87.8	97.3	98.0	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		78.0	86.4	87.8	97.3	98.0	98.8	99.1	99.8	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 646

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] 12 | TAEGU AB KO | 68-72, 74-79 | JUN

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-1500
HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		37.3	37.[illegible]	37.1	41.0	41.2	42.8	43.0	43.1	43.4	43.6	43.6	43.6	43.6	43.6	43.6
≥ 20000		39.5	41.2	41.8	45.7	45.8	47.5	47.6	47.8	48.1	48.2	48.2	48.2	48.2	48.2	48.2
≥ 18000		44.5	46.2	49.2	53.7	53.9	55.5	55.7	55.8	56.1	56.3	56.3	56.3	56.3	56.3	56.3
≥ 16000		44.5	46.2	48.2	53.7	53.9	55.5	55.7	55.8	56.1	56.3	56.3	56.3	56.3	56.3	56.3
≥ 14000		44.9	46.7	48.8	54.3	54.5	56.1	56.4	56.6	56.9	57.[illegible]	57.[illegible]	57.[illegible]	57.[illegible]	57.[illegible]	57.[illegible]
≥ 12000		45.4	47.1	49.3	54.8	54.9	56.6	56.9	57.	57.3	57.5	57.5	57.5	57.5	57.5	57.5
≥ 10000		48.2	52.4	52.5	59.3	59.1	61.8	61.1	61.2	61.5	61.7	61.7	61.7	61.7	61.7	61.7
≥ 9000		48.2	52.4	52.5	59.0	59.1	61.8	61.1	61.2	61.5	61.7	61.7	61.7	61.7	61.7	61.7
≥ 8000		52.4	54.6	54.8	61.7	61.8	63.5	63.8	63.9	64.2	64.4	64.4	64.4	64.4	64.4	64.5
≥ 7000		52.9	55.1	55.4	62.3	62.4	64.1	64.4	64.5	64.8	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]
≥ 6000		51.3	55.5	55.8	62.7	62.9	64.5	64.8	65.[illegible]	65.3	65.4	65.4	65.4	65.4	65.4	65.6
≥ 5000		51.5	55.8	56.1	63.0	63.2	64.8	65.1	65.3	65.6	65.7	65.7	65.7	65.7	65.7	65.9
≥ 4500		51.6	56.0	56.3	63.2	63.3	65.0	65.3	65.4	65.7	65.9	65.9	65.9	65.9	65.9	66.
≥ 4000		54.0	58.3	59.6	67.1	67.4	69.2	69.5	69.6	69.9	70.1	70.1	70.1	70.1	70.1	70.4
≥ 3500		59.2	60.8	61.2	68.9	69.2	71.0	71.3	71.4	71.7	71.9	71.9	71.9	71.9	71.9	72.
≥ 3000		62.7	69.3	69.9	79.9	80.2	82.2	82.5	82.6	82.9	83.2	83.2	83.2	83.2	83.2	83.4
≥ 2500		65.0	72.8	73.5	85.2	85.8	87.7	88.0	88.2	88.5	88.8	88.8	88.8	88.8	88.8	88.9
≥ 2000		66.9	75.6	76.3	89.6	90.7	93.0	93.3	93.6	93.9	94.2	94.2	94.2	94.2	94.2	94.3
≥ 1800		67.5	76.6	77.4	91.3	92.2	94.6	95.2	95.5	95.8	96.1	96.1	96.1	96.1	96.1	96.3
≥ 1500		67.3	77.4	78.1	92.8	93.7	96.6	97.2	97.6	97.9	98.2	98.2	98.2	98.2	98.2	98.4
≥ 1200		67.8	77.4	78.1	93.1	94.0	97.0	97.6	98.1	98.4	98.8	98.8	98.8	98.8	98.8	99.
≥ 1000		67.8	77.4	78.1	93.1	94.0	97.0	97.6	98.1	98.7	99.1	99.1	99.1	99.1	99.1	99.3
≥ 900		67.8	77.4	78.1	93.1	94.0	97.0	97.6	98.1	98.7	99.1	99.1	99.1	99.1	99.1	99.3
≥ 800		67.8	77.4	78.1	93.1	94.0	97.0	97.6	98.1	98.7	99.1	99.1	99.1	99.1	99.1	99.3
≥ 700		67.8	77.4	78.1	93.1	94.0	97.0	97.6	98.1	98.7	99.1	99.1	99.1	99.1	99.1	99.3
≥ 600		67.8	77.4	78.1	93.1	94.0	97.0	97.8	98.2	98.8	99.3	99.3	99.3	99.3	99.3	99.4
≥ 500		67.8	77.4	78.1	93.1	94.0	97.0	97.8	98.5	99.1	99.6	99.6	99.6	99.6	99.6	99.7
≥ 400		67.8	77.4	78.1	93.1	94.0	97.0	97.8	98.5	99.1	99.6	99.6	99.6	99.6	99.6	99.7
≥ 300		67.8	77.4	78.1	93.1	94.0	97.0	97.8	98.5	99.1	99.6	99.6	99.6	99.6	99.6	99.7
≥ 200		67.8	77.5	78.3	93.4	94.3	97.3	98.1	98.8	99.4	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 100		67.8	77.5	78.3	93.4	94.3	97.3	98.1	98.8	99.4	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 0		67.8	77.5	78.3	93.4	94.3	97.3	98.1	98.8	99.4	99.9	99.9	99.9	99.9	99.9	[illegible]

TOTAL NUMBER OF OBSERVATIONS 662

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...
...STATION SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION ...ASED A...KO STATION NAME 68-70,74-79 YEARS ... MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

...-2... HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		22.9	23.0	29.3	32.7	33.3	36.3	37.2	37.3	37.6	38.2	38.2	38.2	38.2	38.2	38.2
≥ 20000		26.1	32.	33.5	37.5	38.4	41.9	43.0	43.2	43.5	44.1	44.1	44.1	44.1	44.1	44.1
≥ 18000		26.1	35.2	36.7	41.6	42.7	46.4	47.8	47.9	48.2	48.8	48.8	49.0	49.0	49.0	49.0
≥ 16000		26.1	35.2	36.7	41.8	42.7	46.4	47.8	47.9	48.2	48.8	48.8	49.0	49.0	49.0	49.0
≥ 14000		23.4	35.4	37.5	42.5	44.1	47.9	49.3	49.5	49.8	50.4	50.4	50.5	50.5	50.5	50.5
≥ 12000		29.7	36.4	38.1	43.2	44.9	48.7	50.1	50.2	50.7	51.3	51.3	51.5	51.5	51.5	51.5
≥ 10000		31.0	39.2	41.2	46.5	48.2	52.2	53.8	53.9	54.4	55.0	55.0	55.1	55.1	55.1	55.1
≥ 9000		31.0	39.2	41.2	46.5	48.2	52.2	53.8	53.9	54.4	55.0	55.0	55.1	55.1	55.1	55.1
≥ 8000		33.8	42.1	44.4	50.4	52.1	56.1	57.6	57.8	58.2	58.8	58.8	59.0	59.0	59.0	59.0
≥ 7000		34.9	43.6	46.1	52.2	53.9	57.9	59.4	59.6	60.1	60.7	60.7	60.8	60.8	60.8	60.8
≥ 6000		35.0	43.8	46.2	52.5	54.4	58.4	60.1	60.2	60.7	61.3	61.3	61.4	61.4	61.4	61.4
≥ 5000		36.1	45.2	47.6	53.9	55.8	59.9	61.6	61.8	62.2	62.8	62.8	63.0	63.0	63.0	63.0
≥ 4500		36.4	45.5	47.9	54.2	56.1	60.2	61.9	62.1	62.5	63.1	63.1	63.3	63.3	63.3	63.3
≥ 4000		37.5	46.7	49.3	56.8	58.7	63.1	64.8	65.0	65.4	66.1	66.1	66.2	66.2	66.2	66.2
≥ 3500		37.8	47.0	49.6	57.3	59.1	63.6	65.3	65.4	65.9	66.5	66.5	66.7	66.7	66.7	66.7
≥ 3000		43.3	53.5	56.1	65.3	67.3	71.9	73.7	73.9	74.5	75.1	75.1	75.6	75.6	75.6	75.6
≥ 2500		45.9	56.1	58.8	70.2	72.4	77.4	79.4	79.6	80.2	80.8	80.8	81.3	81.3	81.3	81.3
≥ 2000		46.5	59.8	62.5	75.0	77.1	82.5	84.8	85.1	85.7	86.5	86.5	86.9	86.9	86.9	86.9
≥ 1800		49.3	61.0	63.9	76.7	78.8	84.3	86.8	87.1	87.7	88.6	88.6	89.1	89.1	89.1	89.1
≥ 1500		49.6	62.7	65.9	79.3	81.7	87.6	90.6	91.1	91.9	92.8	92.8	93.2	93.2	93.2	93.2
≥ 1200		49.8	62.7	65.9	80.6	83.3	89.4	92.9	93.4	94.3	95.2	95.2	95.7	95.7	95.7	95.7
≥ 1000		49.8	62.7	65.9	80.6	83.3	89.7	94.0	94.8	96.0	97.2	97.2	97.7	97.7	97.7	97.7
≥ 900		49.8	62.7	65.9	80.6	83.3	89.7	94.0	94.8	96.0	97.2	97.2	97.7	97.7	97.7	97.7
≥ 800		49.8	62.7	65.9	80.6	83.3	89.7	94.3	95.2	96.3	97.7	97.7	98.2	98.2	98.2	98.2
≥ 700		49.8	62.7	66.1	80.8	83.4	89.9	94.5	95.2	96.5	97.8	97.8	98.3	98.3	98.3	98.3
≥ 600		49.8	62.7	66.1	81.0	83.7	90.3	95.2	96.0	97.2	98.6	98.6	99.1	99.1	99.1	99.1
≥ 500		49.8	62.7	66.1	81.1	83.9	90.5	95.4	96.3	97.5	99.2	99.2	99.7	99.7	99.7	99.7
≥ 400		49.8	62.7	66.1	81.1	83.9	90.5	95.4	96.3	97.5	99.2	99.2	99.7	99.7	99.7	99.7
≥ 300		49.8	62.7	66.1	81.1	83.9	90.5	95.4	96.3	97.5	99.2	99.2	99.7	99.7	99.7	99.7
≥ 200		49.9	62.8	66.2	81.3	84.0	90.6	95.5	96.5	97.7	99.4	99.4	99.8	99.8	99.8	99.8
≥ 100		49.9	62.8	66.2	81.3	84.0	90.6	95.5	96.5	97.7	99.4	99.4	99.8	99.8	99.8	100.0
≥ 0		49.9	62.8	66.2	81.3	84.0	90.6	95.5	96.5	97.7	99.4	99.4	99.8	99.8	99.8	100.0

TOTAL NUMBER OF OBSERVATIONS 651

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | JUN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0900-1100 HOURS (ST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		25.9	29.4	30.4	34.1	35.0	36.7	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4	37.4
≥ 20000		31.1	36.5	38.1	42.8	43.8	45.8	46.6	46.6	46.6	46.6	46.6	46.6	46.6	46.6	46.6
≥ 18000		32.9	39.1	40.6	46.3	47.5	49.5	50.2	50.2	50.2	50.2	50.2	50.4	50.4	50.4	50.4
≥ 16000		32.9	39.1	40.6	46.6	47.8	49.8	50.5	50.5	50.5	50.5	50.5	50.7	50.7	50.7	50.7
≥ 14000		33.9	41.5	42.8	48.1	49.5	51.6	52.4	52.4	52.4	52.4	52.4	52.5	52.5	52.5	52.5
≥ 12000		35.8	41.9	43.4	49.5	50.8	53.0	53.7	53.7	53.7	53.7	53.7	53.9	53.9	53.9	53.9
≥ 10000		36.8	44.1	45.8	52.1	53.4	55.6	56.3	56.3	56.3	56.3	56.3	56.5	56.5	56.5	56.5
≥ 9000		37.1	44.4	46.3	52.5	53.9	56.0	56.8	56.8	56.8	56.8	56.8	56.9	56.9	56.9	56.9
≥ 8000		38.5	46.6	48.9	55.4	56.9	59.1	59.8	59.8	59.8	59.8	59.8	60.0	60.0	60.0	60.0
≥ 7000		39.6	47.6	50.1	56.9	58.4	60.6	61.3	61.3	61.3	61.3	61.3	61.5	61.5	61.5	61.5
≥ 6000		39.6	47.6	50.1	56.9	58.6	60.7	61.6	61.6	61.6	61.6	61.6	61.8	61.8	61.8	61.8
≥ 5000		41.1	49.3	52.1	59.1	60.9	63.0	63.9	63.9	63.9	63.9	63.9	64.1	64.1	64.1	64.1
≥ 4500		41.1	49.3	52.1	59.1	60.9	63.0	63.9	63.9	63.9	63.9	63.9	64.1	64.1	64.1	64.1
≥ 4000		42.6	51.1	53.9	61.0	63.0	65.1	66.1	66.1	66.1	66.1	66.1	66.2	66.2	66.2	66.2
≥ 3500		43.8	52.4	55.4	62.7	64.7	66.8	67.7	67.7	67.7	67.7	67.7	67.9	67.9	67.9	67.9
≥ 3000		47.8	57.4	60.6	70.2	72.1	74.4	75.5	75.5	75.5	75.5	75.5	75.6	75.6	75.6	75.6
≥ 2500		52.7	62.6	65.9	76.9	79.1	81.4	82.6	82.6	82.6	82.6	82.6	82.8	82.8	82.8	82.8
≥ 2000		56.3	67.0	70.6	81.9	84.6	87.1	88.3	88.4	88.4	88.4	88.4	88.6	88.6	88.6	88.6
≥ 1800		56.6	67.4	71.1	82.5	85.4	87.8	89.0	89.2	89.2	89.2	89.2	89.3	89.3	89.3	89.3
≥ 1500		58.3	69.1	72.9	86.9	90.3	92.8	94.2	94.5	94.7	94.7	94.8	95.0	95.0	95.1	95.1
≥ 1200		58.3	69.3	73.1	87.7	91.3	94.1	95.7	96.0	96.2	96.2	96.3	96.7	96.7	96.7	96.7
≥ 1000		58.3	69.3	73.1	88.0	91.9	94.7	96.3	96.8	97.3	97.3	97.4	97.7	97.7	97.7	97.7
≥ 900		58.3	69.3	73.1	88.1	92.2	95.0	96.8	97.3	97.7	97.7	97.9	98.2	98.2	98.2	98.2
≥ 800		58.3	69.3	73.1	88.3	92.5	95.3	97.3	98.0	98.5	98.5	98.6	98.9	98.9	98.9	98.9
≥ 700		58.3	69.3	73.1	88.3	92.5	95.3	97.3	98.0	98.5	98.5	98.6	98.9	98.9	98.9	98.9
≥ 600		58.3	69.3	73.1	88.3	92.5	95.3	97.3	98.0	98.5	98.5	98.6	99.1	99.1	99.1	99.1
≥ 500		58.3	69.3	73.1	88.4	92.7	95.6	97.6	98.3	98.9	98.9	99.1	99.5	99.5	99.5	99.5
≥ 400		58.3	69.3	73.1	88.4	92.7	95.7	97.7	98.6	99.2	99.2	99.4	99.8	99.8	99.8	99.8
≥ 300		58.3	69.3	73.1	88.4	92.7	95.7	97.7	98.6	99.2	99.2	99.4	99.8	99.8	99.8	99.8
≥ 200		58.3	69.3	73.1	88.4	92.7	95.7	97.7	98.6	99.2	99.2	99.4	99.8	99.8	99.8	99.8
≥ 100		58.3	69.3	73.1	88.6	92.8	95.9	97.9	98.8	99.4	99.4	99.5	100.0	100.0	100.0	100.0
≥ 0		58.3	69.3	73.1	88.6	92.8	95.9	97.9	98.8	99.4	99.4	99.5	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 657

[illegible] CLIMATOLOGY BRANCH
[illegible]TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible]EGU AB KJ STATION NAME | 68-70,74-79 YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-1400 HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		33.[illegible]	35.2	35.2	36.1	36.2	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8
≥ 20000		41.5	45.2	45.5	46.8	47.1	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7
≥ 18000		47.1	5[illegible].8	51.1	52.7	53.[illegible]	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6
≥ 16000		47.1	5[illegible].8	51.1	52.7	53.[illegible]	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6
≥ 14000		4[illegible].7	52.4	52.7	54.3	54.6	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2
≥ 12000		49.3	53.2	53.5	55.2	55.5	56.1	56.1	56.1	56.1	56.1	56.1	56.1	56.1	56.1	56.1
≥ 10000		50.8	54.8	55.2	57.0	57.3	57.9	57.9	57.9	57.9	57.9	57.9	57.9	57.9	57.9	57.9
≥ 9000		51.4	55.4	55.8	57.6	57.9	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5	58.5
≥ 8000		53.2	57.4	57.9	59.8	60.1	60.7	60.7	60.7	6[illegible].7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 7000		54.1	58.5	59.2	61.1	61.4	62.0	62.0	62.[illegible]	62.0	62.[illegible]	62.[illegible]	62.0	62.[illegible]	62.[illegible]	62.[illegible]
≥ 6000		54.9	59.5	60.2	62.2	62.4	63.0	63.0	63.[illegible]	63.0	63.[illegible]	63.[illegible]	63.0	63.0	63.0	63.[illegible]
≥ 5000		56.3	61.0	61.9	63.8	64.1	64.7	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8
≥ 4500		56.3	61.0	61.9	63.8	64.1	64.7	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8	64.8
≥ 4000		62.3	67.3	68.2	70.3	70.5	71.1	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 3500		64.4	69.5	70.5	72.6	72.9	73.6	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 3000		69.4	75.1	76.3	79.7	80.1	81.0	81.4	81.6	81.6	81.6	81.6	81.6	81.6	81.6	81.6
≥ 2500		7[illegible].8	79.2	[illegible]0.4	84.8	85.6	86.5	86.9	87.[illegible]	87.0	87.[illegible]	87.[illegible]	87.0	87.[illegible]	87.0	87.[illegible]
≥ 2000		76.1	83.5	84.7	89.7	90.7	91.6	92.0	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 1800		76.4	83.9	85.1	90.4	91.5	92.3	92.8	92.9	92.9	92.9	92.9	92.9	92.9	92.9	92.9
≥ 1500		7[illegible].4	86.5	87.8	93.7	94.7	95.6	96.0	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 1200		78.5	86.6	87.9	94.1	95.4	96.5	97.3	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 1000		78.5	86.6	87.9	94.6	96.0	97.1	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 900		78.5	86.6	87.9	94.6	96.0	97.1	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 800		78.8	86.9	88.2	95.0	96.6	97.8	98.8	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 700		78.8	86.9	88.2	95.0	96.6	97.8	98.8	99.1	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 600		7[illegible].8	86.9	88.2	95.0	96.6	97.8	98.8	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 500		78.9	87.0	88.4	95.1	97.1	98.2	99.3	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400		78.9	87.0	88.4	95.1	97.1	98.2	99.3	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		78.9	87.0	88.4	95.1	97.1	98.2	99.3	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		79.1	87.2	88.5	95.3	97.2	98.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.[illegible]
≥ 100		79.1	87.2	88.5	95.3	97.2	98.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.[illegible]
≥ 0		79.1	87.2	88.5	95.3	97.2	98.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.[illegible]

TOTAL NUMBER OF OBSERVATIONS 679

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | JUN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1500-1700 HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		32.5	32.5	32.5	32.1	32.3	32.6	32.6	32.6	32.6	32.6	32.6	32.6	32.6	32.6	32.6
≥ 20000		39.9	41.4	41.4	41.5	41.7	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.1
≥ 18000		47.2	48.7	48.7	48.8	49.0	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3
≥ 16000		47.2	46.7	48.7	48.8	49.0	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3
≥ 14000		48.8	51.6	51.6	52.7	53.9	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 12000		51.3	53.1	53.1	53.3	53.4	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7	53.7
≥ 10000		53.6	55.5	55.5	55.8	56.0	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3	56.3
≥ 9000		54.0	56.0	56.0	56.3	56.4	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7
≥ 8000		56.1	58.0	58.0	58.6	58.8	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 7000		57.0	58.9	58.9	59.5	59.7	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
≥ 6000		57.9	59.8	59.8	60.6	60.7	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0
≥ 5000		58.9	60.9	60.9	61.6	61.8	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1	62.1
≥ 4500		59.1	61.0	61.0	61.8	61.9	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2
≥ 4000		67.3	69.8	69.8	70.5	70.7	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0
≥ 3500		71.4	73.1	73.1	73.8	74.0	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3
≥ 3000		78.1	81.4	81.4	82.7	83.2	83.6	83.6	83.8	83.8	83.8	83.8	83.8	83.8	83.8	83.8
≥ 2500		81.8	85.7	85.9	87.5	88.1	88.5	88.5	88.7	86.7	88.7	88.7	88.7	88.7	88.7	88.7
≥ 2000		84.4	88.7	89.0	91.8	92.4	92.9	92.9	93.0	93.0	93.0	93.0	93.0	93.0	93.0	93.0
≥ 1800		84.8	89.1	89.4	92.3	93.0	93.5	93.5	93.6	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 1500		86.5	91.7	92.1	95.5	96.3	96.7	96.7	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 1200		86.8	92.4	92.9	96.6	97.3	97.9	98.2	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 1000		86.9	92.6	93.0	97.0	97.8	98.4	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 900		86.9	92.6	93.0	97.0	97.9	98.5	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 800		86.9	92.6	93.0	97.0	97.9	98.5	99.1	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		86.9	92.6	93.0	97.0	97.9	98.5	99.1	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600		86.9	92.6	93.0	97.0	97.9	98.5	99.1	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 500		86.9	92.6	93.0	97.0	98.2	98.8	99.4	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		86.9	92.6	93.0	97.0	98.2	98.8	99.4	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		86.9	92.6	93.0	97.0	98.2	98.8	99.4	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		86.9	92.7	93.2	97.2	98.4	99.0	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		86.9	92.7	93.2	97.2	98.4	99.0	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		86.9	92.7	93.2	97.2	98.4	99.0	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 672

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...TAC CLIMATOLOGY BRANCH
...ETAC
A... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

...12 (STATION) TAEGU AB KO (STATION NAME) 68-70, 74-79 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

...1800-2000 (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		30.0	30.1	30.1	30.4	30.6	31.0	31.0	31.0	31.0	31.0	31.0	31.0	31.	31.	31.
≥ 20000		41.9	41.1	41.1	41.4	41.5	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.0	42.
≥ 18000		47.8	48.2	48.2	48.7	48.8	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3	49.3
≥ 16000		48.0	48.4	48.4	48.8	49.3	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4
≥ 14000		49.3	49.7	49.7	50.1	50.3	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
≥ 12000		51.2	51.6	51.6	52.0	52.2	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6
≥ 10000		55.0	55.7	55.7	56.4	56.6	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0
≥ 9000		55.1	55.8	55.8	56.6	56.7	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2	57.2
≥ 8000		59.5	59.5	59.5	60.4	60.5	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0
≥ 7000		59.6	60.7	60.7	62.0	62.1	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6	62.6
≥ 6000		61.1	61.4	61.4	62.7	62.9	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3
≥ 5000		61.0	62.6	62.6	63.9	64.0	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5
≥ 4500		61.0	62.6	62.6	63.9	64.0	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.5	64.
≥ 4000		67.0	68.7	68.7	70.0	70.2	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.6
≥ 3500		72.3	72.2	72.2	73.5	73.7	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1
≥ 3000		76.3	78.9	79.2	80.7	80.8	81.3	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4	81.4
≥ 2500		79.5	83.2	83.5	86.3	86.4	86.8	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0	87.0
≥ 2000		82.6	87.9	88.5	92.0	92.3	92.7	92.8	92.8	92.8	92.8	92.8	92.8	92.6	92.8	92.8
≥ 1800		83.2	88.5	89.0	92.5	92.8	93.3	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4	93.4
≥ 1500		84.6	90.6	91.8	96.1	96.5	97.4	97.5	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 1200		84.6	91.8	92.0	96.6	97.1	98.0	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1000		84.8	91.1	92.3	96.9	97.4	98.2	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 900		84.8	91.1	92.3	96.9	97.4	98.2	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 800		84.9	91.4	92.5	97.2	97.7	98.5	98.8	99.0	99.1	99.3	99.3	99.3	99.3	99.3	99.3
≥ 700		84.9	91.4	92.5	97.2	97.7	98.5	98.8	99.0	99.1	99.3	99.3	99.3	99.3	99.3	99.3
≥ 600		84.9	91.4	92.5	97.2	97.7	98.5	98.8	99.0	99.1	99.3	99.3	99.3	99.3	99.3	99.3
≥ 500		84.9	91.4	92.5	97.2	97.7	98.5	98.8	99.1	99.3	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400		84.9	91.4	92.5	97.2	97.7	98.5	98.8	99.1	99.3	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300		85.1	91.5	92.7	97.4	97.8	98.7	99.0	99.3	99.4	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		85.1	91.7	92.8	97.5	98.0	98.8	99.1	99.4	99.6	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		85.1	91.7	92.8	97.5	98.0	98.8	99.1	99.4	99.6	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		85.1	91.7	92.8	97.5	98.0	98.8	99.1	99.4	99.6	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 684

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] 1 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | JUN MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-23C HOURS (LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		37.	39.1	39.1	3[illegible].8	3[illegible].8	38.9	39.1	39.1	39.1	39.1	39.1	39.1	39.1	39.1	39.1
≥ 20000		45.4	46.5	46.5	47.2	47.2	47.3	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5	47.5
≥ 18000		49.[illegible]	51.7	51.7	52.2	52.2	52.4	52.5	52.5	52.5	52.5	52.5	52.5	52.5	52.5	52.5
≥ 16000		49.3	51.[illegible]	51.[illegible]	52.5	52.5	52.7	52.8	52.8	52.8	52.8	52.8	52.8	52.6	52.8	52.8
≥ 14000		50.3	52.2	52.2	53.7	53.7	53.8	54.0	54.0	54.0	54.0	54.0	54.0	54.0	54.0	54.0
≥ 12000		51.0	52.9	52.9	54.7	54.7	54.9	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0	55.0
≥ 10000		55.0	56.9	56.9	58.8	58.8	59.0	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 9000		55.0	56.9	56.9	58.8	58.8	59.0	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 8000		59.3	61.2	61.2	63.1	63.1	63.3	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4	63.4
≥ 7000		59.4	61.5	61.5	63.9	63.9	64.0	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 6000		60.0	62.4	62.4	64.7	64.7	64.9	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 5000		60.2	62.7	62.7	65.2	65.2	65.3	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5
≥ 4500		60.2	62.7	62.7	65.2	65.2	65.3	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5	65.5
≥ 4000		61.5	64.7	64.7	67.8	67.8	68.0	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 3500		63.1	66.8	66.8	70.1	70.1	70.2	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4
≥ 3000		73.3	77.9	77.9	81.7	81.7	81.9	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0
≥ 2500		77.7	84.1	84.1	89.4	89.4	89.7	89.8	89.8	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 2000		78.1	86.4	86.6	92.6	93.2	93.7	94.1	94.1	94.2	94.2	94.2	94.2	94.2	94.2	94.2
≥ 1800		79.4	87.0	87.2	93.8	94.4	94.8	95.1	95.3	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 1500		79.9	88.[illegible]	89.1	96.2	96.8	97.2	97.5	97.6	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1200		79.9	88.[illegible]	89.1	96.8	97.3	97.8	98.2	98.4	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 1000		80.2	88.9	89.4	97.1	97.6	98.1	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 900		80.2	88.9	89.4	97.1	97.6	98.1	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800		80.2	88.9	89.4	97.1	97.6	98.1	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 700		80.2	88.9	89.4	97.1	97.6	98.1	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 600		80.2	88.9	89.4	97.1	97.6	98.1	98.5	98.7	98.8	99.0	99.0	99.0	99.0	99.0	99.0
≥ 500		80.2	88.9	89.4	97.1	97.6	98.1	98.5	99.0	99.1	99.6	99.6	99.6	99.6	99.6	99.6
≥ 400		80.2	88.9	89.4	97.1	97.6	98.1	98.5	99.0	99.1	99.6	99.6	99.6	99.6	99.6	99.6
≥ 300		80.2	88.9	89.4	97.1	97.6	98.1	98.5	99.0	99.1	99.6	99.6	99.6	99.6	99.6	99.6
≥ 200		80.4	89.1	89.5	97.5	98.1	98.5	99.0	99.4	99.6	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		80.4	89.1	89.5	97.5	98.1	98.5	99.0	99.4	99.6	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		80.4	89.1	89.5	97.5	98.1	98.5	99.0	99.4	99.6	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 67[illegible]

...OLOGICAL CLIMATOLOGY BRANCH
...AFETAC
A... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

... 10 | TAEGU AB KO | 65-70, 74-79 | ALL
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL
HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		32.0	34.1	34.4	36.3	36.5	37.5	37.8	37.8	37.9	38.0	38.0	38.0	38.0	38.0	38.0
≥ 20000		39.2	41.8	42.2	44.4	44.7	45.8	46.1	46.1	46.2	46.3	46.3	46.3	46.3	46.3	46.3
≥ 18000		43.7	47.0	47.4	50.3	50.6	51.8	52.1	52.1	52.2	52.3	52.3	52.3	52.3	52.3	52.3
≥ 16000		43.7	47.1	47.5	50.4	50.7	51.9	52.2	52.2	52.3	52.4	52.4	52.4	52.4	52.4	52.4
≥ 14000		44.8	48.3	48.7	51.6	52.1	53.2	53.5	53.6	53.6	53.7	53.7	53.8	53.8	53.8	53.8
≥ 12000		45.9	49.5	49.9	52.9	53.4	54.5	54.9	54.9	55.0	55.1	55.1	55.1	55.1	55.1	55.1
≥ 10000		48.6	52.4	52.9	56.2	56.7	57.8	58.2	58.2	58.3	58.4	58.4	58.4	58.4	58.4	58.4
≥ 9000		48.8	52.6	53.1	56.4	56.9	58.0	58.4	58.4	58.5	58.6	58.6	58.6	58.6	58.6	58.6
≥ 8000		51.5	55.5	56.1	59.7	60.2	61.3	61.7	61.7	61.8	61.9	61.9	61.9	61.9	61.9	62.0
≥ 7000		52.2	56.3	57.1	60.8	61.2	62.4	62.8	62.8	62.9	63.0	63.0	63.0	63.0	63.0	63.1
≥ 6000		52.6	56.8	57.6	61.3	61.9	63.1	63.4	63.5	63.6	63.7	63.7	63.7	63.7	63.7	63.7
≥ 5000		53.4	57.8	58.6	62.4	63.0	64.2	64.6	64.6	64.7	64.8	64.8	64.8	64.8	64.8	64.9
≥ 4500		53.5	57.9	58.7	62.5	63.1	64.3	64.6	64.7	64.8	64.9	64.9	64.9	64.9	64.9	64.9
≥ 4000		57.2	62.0	62.9	67.0	67.6	68.8	69.3	69.3	69.4	69.5	69.5	69.5	69.5	69.5	69.5
≥ 3500		59.0	64.0	64.9	69.1	69.7	71.0	71.4	71.4	71.5	71.6	71.6	71.7	71.7	71.7	71.7
≥ 3000		65.5	71.5	72.5	78.1	78.8	80.1	80.6	80.7	80.8	80.9	80.9	81.0	81.0	81.0	81.0
≥ 2500		69.3	75.8	76.9	83.0	84.6	86.1	86.6	86.7	86.8	86.9	86.9	87.0	87.0	87.0	87.0
≥ 2000		71.5	79.2	80.6	88.3	89.5	91.0	91.6	91.5	91.9	92.1	92.1	92.2	92.2	92.2	92.2
≥ 1800		72.1	80.0	81.3	89.3	90.5	92.1	92.7	92.9	93.1	93.2	93.2	93.3	93.3	93.3	93.3
≥ 1500		73.3	81.7	83.3	92.2	93.5	95.3	96.0	96.3	96.4	96.6	96.6	96.7	96.7	96.7	96.7
≥ 1200		73.1	81.9	83.4	92.9	94.2	96.1	97.1	97.4	97.6	97.8	97.8	97.9	97.9	97.9	97.9
≥ 1000		73.2	82.0	83.5	93.1	94.5	96.5	97.6	98.0	98.3	98.5	98.5	98.6	98.6	98.6	98.6
≥ 900		73.2	82.0	83.5	93.1	94.6	96.5	97.7	98.1	98.4	98.6	98.6	98.7	98.7	98.7	98.7
≥ 800		73.2	82.0	83.6	93.2	94.7	96.7	97.9	98.3	98.7	98.9	98.9	99.0	99.0	99.0	99.0
≥ 700		73.2	82.0	83.6	93.3	94.7	96.7	98.0	98.3	98.7	98.9	99.0	99.1	99.1	99.1	99.1
≥ 600		73.2	82.0	83.6	93.3	94.8	96.8	98.1	98.5	98.8	99.1	99.1	99.2	99.2	99.2	99.2
≥ 500		73.2	82.1	83.6	93.3	94.9	96.9	98.2	98.8	99.2	99.5	99.6	99.7	99.7	99.7	99.7
≥ 400		73.2	82.1	83.6	93.3	94.9	97.0	98.2	98.8	99.2	99.6	99.6	99.7	99.7	99.7	99.8
≥ 300		73.3	82.1	83.7	93.4	94.9	97.0	98.3	98.9	99.2	99.6	99.6	99.8	99.8	99.8	99.8
≥ 200		73.3	82.2	83.8	93.5	95.1	97.2	98.4	99.1	99.4	99.8	99.8	99.9	99.9	99.9	100.0
≥ 100		73.3	82.2	83.8	93.6	95.1	97.2	98.5	99.1	99.5	99.8	99.8	100.0	100.0	100.0	100.0
≥ 0		73.3	82.2	83.8	93.6	95.1	97.2	98.5	99.1	99.5	99.8	99.8	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 5329

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...PAL CLIMATOLOGY BRANCH
...ETAC
...EATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 | FARGO AB ND | 58-79,74-79 | JUL
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...-2201
HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		29.9	31.3	31.3	34.1	34.1	34.2	34.2	34.3	34.2	34.2	34.2	34.2	34.2	34.2	34.2
≥ 20000		32.6	33.9	33.9	36.9	36.9	37.0	37.0	37.1	37.0	37.0	37.0	37.0	37.0	37.0	37.
≥ 18000		35.5	37.2	37.2	40.7	40.7	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9	40.9
≥ 16000		36.7	37.3	37.3	40.9	40.9	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0
≥ 14000		36.4	38.5	38.5	42.2	42.0	42.2	42.2	42.2	42.2	42.2	42.2	42.2	42.2	42.2	42.2
≥ 12000		37.0	39.8	39.8	43.5	43.5	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7
≥ 10000		41.2	44.1	44.1	48.2	48.2	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4
≥ 9000		41.2	44.1	44.1	48.2	48.2	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4	48.4
≥ 8000		44.4	47.5	47.5	52.4	52.4	52.5	52.5	52.5	52.5	52.5	52.5	52.5	52.5	52.5	52.5
≥ 7000		45.4	48.8	48.8	53.8	53.8	54.0	54.0	54.	54.0	54.	54.	54.0	54.	54.0	54.
≥ 6000		45.9	49.6	49.6	54.6	54.6	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7	54.7
≥ 5000		46.0	49.9	49.9	55.0	55.0	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.
≥ 4500		46.0	49.9	49.9	55.0	55.0	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.
≥ 4000		48.1	52.4	52.4	57.7	57.7	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8	57.8
≥ 3500		48.5	52.6	52.8	58.1	58.1	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3
≥ 3000		56.3	64.2	64.6	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 2500		65.2	72.0	72.9	82.6	82.7	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9	82.9
≥ 2000		66.1	76.2	77.1	87.9	88.8	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1	89.1
≥ 1800		69.8	76.3	79.9	91.0	92.0	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3	92.3
≥ 1500		70.5	78.8	81.9	93.5	94.7	95.0	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1200		71.6	80.7	82.7	96.3	97.5	97.9	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1000		71.6	80.7	82.7	96.6	97.8	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 900		71.6	81.7	82.7	96.9	97.9	98.4	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5
≥ 800		71.8	81.8	82.9	96.9	98.1	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 700		71.8	81.8	82.9	96.9	98.1	98.5	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 600		71.8	81.8	82.9	97.1	98.2	98.7	99.0	99.1	99.0	99.0	99.0	99.0	99.0	99.0	99.
≥ 500		71.8	81.8	82.9	97.2	98.4	99.1	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.
≥ 400		71.8	81.8	82.9	97.2	98.4	99.1	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.
≥ 300		71.8	82.8	82.9	97.2	98.4	99.1	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.
≥ 200		72.9	83.1	83.0	97.3	98.5	99.3	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.
≥ 100		72.9	83.1	83.0	97.3	98.5	99.3	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.
≥ 0		72.9	83.1	83.0	97.3	98.5	99.3	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.

TOTAL NUMBER OF OBSERVATIONS 67

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...RAL CLIMATOLOGY BRANCH
...TAC
...EATHER SERVICE/MAC

CEILING VERSUS VISIBILI

... STATION | FARGO AP, N. STATION NAME | 68-72, 74-79 YEARS | JUL MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)


... HOURS (ST


CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥
NO CEILING		2[illegible].2	25.2	25.2	29.2	29.4	30.9	30.3	30.[illegible]	30.9	31.1	31.1	31.1	31.1	31.1	[illegible]
≥ 20000		22.7	23.3	28.3	32.3	32.6	34.0	34.0	34.3	34.3	34.3	34.3	34.3	34.3	34.3	34.
≥ 18000		24.5	31.1	31.1	34.5	35.1	36.5	36.6	36.8	36.7	36.9	36.9	36.9	36.9	36.9	36
≥ 16000		24.5	31.1	31.1	34.5	35.1	36.5	36.6	36.8	36.7	36.9	36.9	36.9	36.9	36.9	36
≥ 14000		25.9	31.8	31.8	36.2	36.7	38.1	38.2	38.2	38.4	38.5	38.5	38.5	38.5	38.5	38
≥ 12000		27.4	33.6	33.6	38.2	38.8	40.2	40.3	40.3	40.4	40.5	40.5	40.6	40.6	40.6	40
≥ 10000		36.9	37.7	37.7	43.2	43.7	45.1	45.3	45.3	45.4	45.7	45.7	45.7	45.7	45.7	45
≥ 9000		36.9	37.7	37.7	43.2	43.7	45.1	45.3	45.3	45.4	45.7	45.7	45.7	45.7	45.7	45
≥ 8000		38.0	40.4	40.4	46.9	47.5	48.8	49.0	49.0	49.1	49.4	49.4	49.4	49.4	49.4	49
≥ 7000		39.5	42.0	42.0	48.3	49.0	50.3	50.5	50.5	50.6	51.0	51.0	51.0	51.0	51.0	51
≥ 6000		39.9	42.4	42.4	48.8	49.5	50.9	51.0	51.0	51.2	51.6	51.6	51.6	51.6	51.6	51
≥ 5000		39.5	43.2	43.2	49.7	50.3	51.7	51.9	51.9	52.0	52.4	52.4	52.4	52.4	52.4	52
≥ 4500		39.5	43.2	43.2	49.7	50.3	51.7	51.9	51.9	52.0	52.4	52.4	52.4	52.4	52.4	52
≥ 4000		39.7	44.4	44.7	51.6	52.5	53.9	54.1	54.1	54.2	54.6	54.6	54.6	54.6	54.6	54
≥ 3500		39.6	45.3	45.5	52.7	53.6	55.0	55.2	55.3	55.4	55.8	55.8	55.8	55.8	55.8	55
≥ 3000		46.6	58.5	59.0	66.5	69.6	71.0	71.3	71.4	71.9	72.4	72.4	72.5	72.5	72.5	72
≥ 2500		56.5	64.4	65.5	77.2	78.4	79.8	80.1	80.2	81.7	81.2	81.2	81.3	81.3	81.3	81
≥ 2000		56.4	68.5	69.5	83.5	84.9	86.9	87.6	87.6	88.3	88.7	88.7	88.9	88.9	88.9	88
≥ 1800		57.1	69.6	70.7	85.1	86.5	88.7	89.4	89.5	90.1	90.5	90.5	90.6	90.6	90.6	90
≥ 1500		57.9	71.1	72.6	89.0	90.5	93.0	93.7	93.8	94.5	94.9	94.9	95.0	95.0	95.0	95
≥ 1200		58.6	71.7	73.2	90.6	92.2	94.6	95.5	95.6	96.3	96.7	96.7	96.8	96.8	96.8	96
≥ 1000		58.6	71.7	73.3	91.1	92.6	95.2	96.0	96.1	97.0	97.4	97.4	97.5	97.5	97.5	97
≥ 900		58.6	71.7	73.3	91.2	92.7	95.3	96.1	96.3	97.1	97.5	97.5	97.7	97.7	97.7	97
≥ 800		58.9	71.9	73.7	91.7	93.3	95.9	96.7	96.8	97.7	98.1	98.1	98.2	98.2	98.2	98
≥ 700		58.9	71.9	73.9	91.9	93.5	96.3	97.1	97.2	98.1	98.5	98.5	98.6	98.6	98.6	98
≥ 600		58.9	71.9	73.9	92.0	93.7	96.7	97.5	97.7	98.5	98.9	98.9	99.0	99.0	99.0	99
≥ 500		58.9	71.9	73.9	92.2	93.8	97.1	97.9	98.1	98.9	99.3	99.3	99.4	99.4	99.4	99
≥ 400		58.9	71.9	73.9	92.2	93.8	97.1	97.9	98.1	98.9	99.3	99.3	99.4	99.4	99.4	99
≥ 300		58.9	71.9	73.9	92.2	93.8	97.1	97.9	98.1	98.9	99.3	99.3	99.4	99.4	99.4	99
≥ 200		58.9	71.9	73.9	92.2	93.8	97.1	97.9	98.1	98.9	99.3	99.3	99.4	99.4	99.4	99
≥ 100		58.9	71.9	73.9	92.2	93.8	97.1	97.9	98.1	98.9	99.3	99.3	99.4	99.4	99.4	99
≥ 0		58.9	71.9	73.9	92.2	93.8	97.1	97.9	98.1	98.9	99.3	99.3	99.4	99.4	99.4	99

TOTAL NUMBER OF OBSERVATIONS _____

AD-A113 228 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
TAEGU AB, KOREA. REVISED UNIFORM SUMMARY OF SURFACE WEATHER OBS--ETC(U)
OCT 81

UNCLASSIFIED USAFETAC/DS-81/100 SBI-AD-E850 142 NL

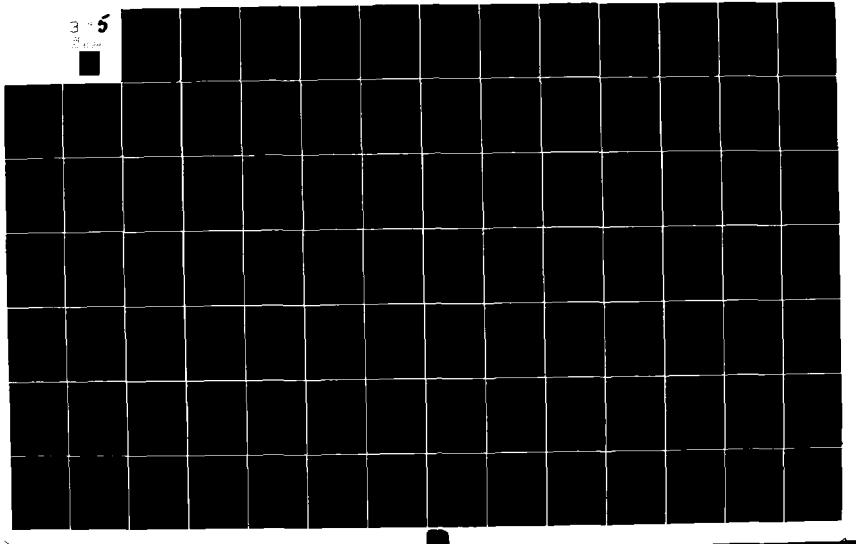

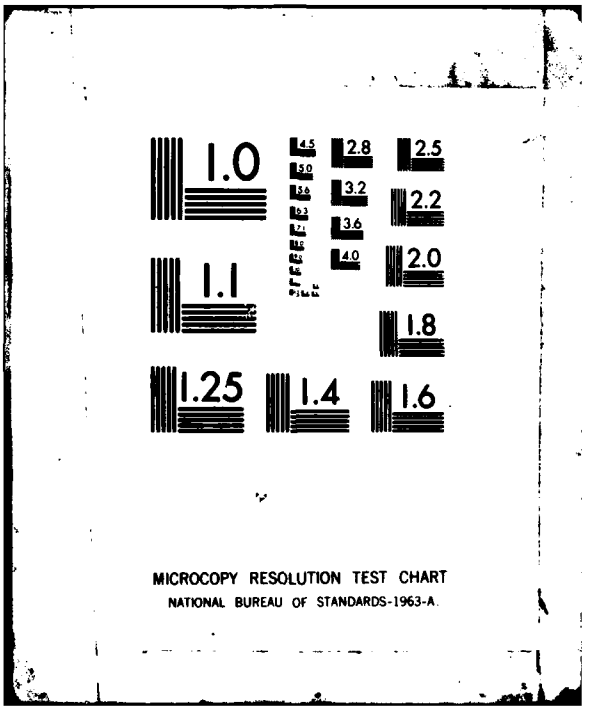
1.0
1.1
1.25
1.4
1.6
1.8
2.0
2.2
2.5
2.8
3.2
3.6
4.0
4.5
5.0
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

[illegible]AL CLIMATOLOGY BRANCH
[illegible]ETAC
[illegible]EATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible]AEGU AB KO STATION NAME | 68-70,74-79 YEARS | JUL MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible]0C-[illegible]0C HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		1[illegible].7	17.9	14.4	19.9	20.4	23.3	23.4	23.4	23.7	23.7	23.7	23.7	23.7	23.7	23.7
≥ 20000		12.7	16.6	17.3	23.7	24.4	27.5	27.8	27.8	28.0	28.0	28.0	28.0	28.0	28.0	28.[illegible]
≥ 18000		13.9	18.3	19.[illegible]	25.8	26.8	30.0	30.3	30.3	30.5	30.7	30.7	30.8	30.8	30.8	30.8
≥ 16000		14.1	18.4	19.1	26.1	27.1	30.3	30.5	30.5	30.8	31.0	31.0	31.1	31.1	31.1	31.1
≥ 14000		14.2	18.5	19.2	26.5	27.5	31.7	31.0	31.1	31.4	31.5	31.5	31.7	31.7	31.7	31.7
≥ 12000		15.2	19.8	20.8	28.9	30.0	33.2	33.5	33.6	33.9	34.0	34.0	34.2	34.2	34.2	34.2
≥ 10000		18.4	23.8	25.0	33.9	35.1	38.4	38.6	38.8	39.2	39.7	39.7	39.9	39.9	39.9	39.9
≥ 9000		18.4	23.8	25.0	33.9	35.1	38.4	38.6	38.8	39.2	39.7	39.7	39.9	39.9	39.9	39.9
≥ 8000		20.4	26.1	27.2	36.5	37.8	41.0	41.3	41.6	42.0	42.7	42.7	42.8	42.8	42.8	42.8
≥ 7000		21.3	27.2	28.5	38.2	39.5	43.0	43.2	43.5	43.9	44.6	44.6	44.8	44.8	44.8	44.8
≥ 6000		21.3	27.3	28.6	38.6	39.9	43.4	43.7	43.9	44.4	45.0	45.0	45.2	45.2	45.2	45.2
≥ 5000		22.0	28.2	29.4	39.5	40.7	44.2	44.5	44.8	45.2	45.9	45.9	46.0	46.0	46.0	46.[illegible]
≥ 4500		22.0	28.2	29.4	39.5	40.7	44.2	44.5	44.8	45.2	45.9	45.9	46.0	46.0	46.0	46.[illegible]
≥ 4000		24.7	31.1	32.5	43.0	44.4	47.8	48.1	48.4	48.8	49.5	49.5	49.7	49.7	49.7	49.7
≥ 3500		25.7	32.2	33.8	44.5	45.9	49.4	49.7	49.9	50.3	51.[illegible]	51.0	51.2	51.2	51.2	51.2
≥ 3000		31.0	39.3	41.4	54.8	56.3	60.3	60.8	61.4	61.9	62.8	62.8	62.9	62.9	62.9	62.9
≥ 2500		37.4	46.4	49.1	64.4	66.4	70.4	71.3	71.8	72.4	73.2	73.4	73.5	73.5	73.5	73.5
≥ 2000		41.7	51.3	54.4	71.8	74.5	78.8	80.1	80.6	81.2	82.0	82.1	82.3	82.3	82.3	82.3
≥ 1800		42.4	53.0	56.2	74.1	76.8	81.3	82.7	83.3	83.8	84.7	84.8	84.9	84.9	84.9	84.9
≥ 1500		43.1	53.8	57.0	76.6	79.6	84.4	86.3	87.0	88.0	88.8	89.0	89.1	89.1	89.1	89.1
≥ 1200		43.2	54.5	57.7	78.5	82.1	87.0	89.4	90.1	91.6	92.7	92.9	93.0	93.[illegible]	93.[illegible]	93.[illegible]
≥ 1000		43.2	54.7	58.0	79.5	83.4	88.8	91.6	92.3	93.9	95.0	95.1	95.3	95.3	95.3	95.3
≥ 900		43.2	54.7	58.0	79.8	83.8	89.3	92.2	92.9	94.4	95.5	95.7	95.8	95.8	95.8	95.8
≥ 800		43.2	54.7	58.0	79.8	84.0	89.5	93.3	94.0	95.8	96.9	97.1	97.2	97.2	97.2	97.2
≥ 700		43.2	54.7	58.2	79.9	84.1	89.7	93.6	94.3	96.1	97.2	97.4	97.6	97.6	97.6	97.6
≥ 600		43.2	54.7	58.3	80.2	84.4	90.1	94.3	95.0	96.9	98.0	98.2	98.5	98.5	98.5	98.5
≥ 500		43.2	54.7	58.3	80.2	84.4	90.1	94.6	95.3	97.5	98.7	98.9	99.2	99.2	99.2	99.2
≥ 400		43.2	54.7	58.3	80.3	84.5	90.2	94.7	95.4	97.6	98.9	99.0	99.3	99.3	99.3	99.3
≥ 300		43.2	54.7	58.3	80.3	84.5	90.2	95.1	95.8	98.0	99.3	99.4	99.7	99.7	99.7	99.7
≥ 200		43.2	54.7	58.3	80.3	84.5	90.2	95.1	95.8	98.0	99.3	99.4	99.7	99.7	99.7	99.7
≥ 100		43.2	54.7	58.3	80.3	84.5	90.2	95.3	96.[illegible]	98.2	99.4	99.6	99.9	99.9	99.9	100.0
≥ 0		43.2	54.7	58.3	80.3	84.5	90.2	95.3	96.[illegible]	98.2	99.4	99.6	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 717

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | [illegible] (STATION NAME) | 68-70, 74-79 (YEARS) | JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] (HOURS (LST))

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		18.3	19.5	19.5	21.9	22.7	23.8	24.1	24.1	24.1	24.2	24.2	24.2	24.2	24.2	[illegible]
≥ 20000		21.8	24.9	24.9	26.4	29.3	30.4	30.7	30.7	30.7	30.8	30.8	30.8	30.8	30.8	[illegible]
≥ 18000		21.9	26.7	26.7	31.1	32.1	33.2	33.4	33.4	33.4	33.6	33.6	33.6	33.6	33.6	33.6
≥ 16000		22.1	26.8	26.8	31.5	32.5	33.6	33.8	33.8	33.8	34.0	34.0	34.0	34.0	34.0	34.0
≥ 14000		22.6	27.4	27.4	32.2	33.3	34.5	34.8	34.8	34.8	34.9	34.9	34.9	34.9	34.9	34.9
≥ 12000		23.3	28.9	28.9	33.7	34.8	36.3	36.3	36.3	36.3	36.4	36.4	36.4	36.4	36.4	36.4
≥ 10000		24.9	30.5	31.1	36.6	37.7	38.9	39.2	39.2	39.2	39.3	39.3	39.3	39.3	39.3	39.3
≥ 9000		24.9	30.5	31.1	36.7	37.8	39.0	39.3	39.3	39.3	39.5	39.5	39.5	39.5	39.5	39.5
≥ 8000		26.6	32.7	33.3	39.3	40.7	41.9	42.2	42.2	42.2	42.3	42.3	42.3	42.3	42.3	42.3
≥ 7000		26.6	32.7	33.3	39.5	41.0	42.2	42.5	42.5	42.5	42.6	42.6	42.6	42.6	42.6	42.6
≥ 6000		26.7	33.0	33.6	39.7	41.2	42.5	42.7	42.7	42.7	42.9	42.9	42.9	42.9	42.9	42.9
≥ 5000		27.1	33.6	34.2	40.4	42.1	43.3	43.6	43.6	43.6	43.7	43.7	43.7	43.7	43.7	43.7
≥ 4500		27.5	34.3	34.7	40.8	42.5	43.7	44.0	44.0	44.0	44.1	44.1	44.1	44.1	44.1	44.1
≥ 4000		30.1	36.8	37.7	44.8	46.4	47.7	47.9	47.9	47.9	48.1	48.1	48.1	48.1	48.1	48.1
≥ 3500		32.2	38.9	39.7	46.8	48.5	49.7	50.0	50.0	50.0	50.3	50.3	50.3	50.3	50.3	50.3
≥ 3000		41.1	48.5	49.6	59.2	61.5	63.0	63.4	63.4	63.4	63.7	63.7	63.7	63.7	63.7	63.7
≥ 2500		47.3	56.0	57.5	68.6	71.4	72.9	73.4	73.4	73.4	73.7	73.7	73.7	73.7	73.7	73.7
≥ 2000		52.5	63.0	64.9	78.4	82.2	83.8	84.7	84.7	84.7	84.9	84.9	84.9	84.9	84.9	84.9
≥ 1800		53.6	64.8	66.7	80.5	84.7	86.4	87.4	87.4	87.4	87.7	87.7	87.7	87.7	87.7	87.7
≥ 1500		54.4	65.9	67.9	84.0	88.2	90.4	91.6	91.6	91.6	92.1	92.1	92.1	92.1	92.1	92.1
≥ 1200		54.8	66.4	68.8	85.8	90.1	92.3	93.7	93.7	93.8	94.1	94.1	94.1	94.1	94.1	94.2
≥ 1000		54.8	66.4	68.8	86.0	90.5	93.0	94.8	94.8	95.1	95.3	95.3	95.3	95.3	95.3	95.5
≥ 900		54.9	66.6	68.9	86.4	91.2	93.7	95.5	95.5	95.8	96.0	96.0	96.0	96.0	96.0	96.2
≥ 800		54.9	66.7	69.0	86.8	92.1	94.8	96.8	96.8	97.1	97.4	97.4	97.4	97.4	97.4	97.5
≥ 700		54.9	66.8	69.2	87.0	92.2	94.9	97.0	97.0	97.3	97.5	97.5	97.5	97.5	97.5	97.7
≥ 600		54.9	66.8	69.2	87.0	92.3	95.3	97.5	97.5	98.2	98.5	98.5	98.5	98.5	98.5	98.6
≥ 500		54.9	66.8	69.2	87.1	92.5	95.5	98.1	98.5	99.2	99.5	99.5	99.5	99.5	99.5	99.6
≥ 400		54.9	66.8	69.2	87.3	92.6	95.6	98.4	98.8	99.5	99.7	99.7	99.7	99.7	99.7	99.9
≥ 300		54.9	66.8	69.2	87.3	92.6	95.6	98.4	98.8	99.5	99.7	99.7	99.7	99.7	99.7	99.9
≥ 200		54.9	66.8	69.2	87.3	92.6	95.6	98.4	98.8	99.5	99.7	99.7	99.7	99.7	99.7	99.9
≥ 100		54.9	66.8	69.2	87.3	92.6	95.6	98.5	98.9	99.6	99.9	99.9	99.9	99.9	99.9	[illegible]
≥ 0		54.9	66.8	69.2	87.3	92.6	95.6	98.5	98.9	99.6	99.9	99.9	99.9	99.9	99.9	[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
ASH WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥½	≥5/16	≥¼	≥0
NO CEILING		21.1	22.3	22.3	23.1	23.2	23.5	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8
≥ 20000		28.2	29.9	29.9	31.2	31.3	31.6	31.8	31.8	31.8	31.8	31.8	31.8	31.8	31.8	31.8
≥ 18000		29.3	31.6	31.6	33.1	33.2	33.5	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8
≥ 16000		29.9	32.1	32.1	33.7	33.8	34.1	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4	34.4
≥ 14000		31.2	33.4	33.4	34.9	35.0	35.3	35.6	35.6	35.6	35.6	35.6	35.6	35.6	35.6	35.6
≥ 12000		33.9	36.2	36.3	37.8	38.0	38.2	38.5	38.5	38.5	38.5	38.5	38.5	38.5	38.5	38.5
≥ 10000		35.5	38.0	38.2	40.6	40.8	41.0	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3
≥ 9000		35.5	38.0	38.2	40.6	40.8	41.0	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3
≥ 8000		36.9	39.4	39.6	42.1	42.3	42.6	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8	42.8
≥ 7000		37.7	40.2	40.5	43.0	43.1	43.4	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7	43.7
≥ 6000		38.4	40.9	41.2	43.7	43.8	44.1	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4
≥ 5000		39.8	42.3	42.6	45.1	45.2	45.5	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8
≥ 4500		39.9	42.4	42.7	45.2	45.3	45.6	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9	45.9
≥ 4000		48.1	47.6	48.0	51.3	51.5	51.7	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0	52.0
≥ 3500		48.1	51.6	51.0	54.7	54.8	55.1	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4
≥ 3000		57.4	61.5	62.2	66.6	66.8	67.0	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3
≥ 2500		63.6	68.8	70.0	75.1	75.8	76.1	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 2000		69.7	76.9	78.3	85.4	86.5	86.8	87.1	87.1	87.2	87.2	87.2	87.2	87.2	87.2	87.2
≥ 1800		70.9	78.7	80.3	87.5	88.7	89.2	89.6	89.6	89.7	89.7	89.7	89.7	89.7	89.7	89.7
≥ 1500		71.8	80.0	81.8	91.5	91.9	92.5	93.5	93.5	93.6	93.6	93.6	93.6	93.6	93.6	93.6
≥ 1200		71.9	80.7	82.8	92.5	94.2	95.0	96.4	96.4	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 1000		72.0	80.8	83.0	93.3	95.1	96.2	97.9	97.9	98.2	98.3	98.3	98.3	98.3	98.3	98.3
≥ 900		72.0	80.8	83.0	93.5	95.3	96.4	98.1	98.1	98.3	98.5	98.5	98.5	98.5	98.5	98.5
≥ 800		72.0	80.9	83.2	93.6	95.5	96.7	98.5	98.5	98.9	99.0	99.0	[illegible]	99.0	99.0	99.0
≥ 700		72.0	80.9	83.2	94.0	96.0	97.1	98.9	98.9	99.3	99.4	99.[illegible]	[illegible]	99.4	99.4	99.4
≥ 600		72.0	80.9	83.2	94.0	96.[illegible]	97.2	99.0	99.[illegible]	99.4	99.6	99.6	[illegible]	99.6	99.6	99.6
≥ 500		72.3	80.9	83.2	94.2	96.1	97.5	99.3	99.3	99.7	99.9	99.9	99.[illegible]	99.9	99.9	99.9
≥ 400		72.2	81.1	83.3	94.3	96.2	97.6	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		72.2	81.1	83.3	94.3	96.2	97.6	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		72.2	81.1	83.3	94.3	96.2	97.6	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		72.2	81.1	83.3	94.3	96.2	97.6	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		72.2	81.1	83.3	94.3	96.2	97.6	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 71[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]TAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible] STATION NAME | 68-70, 74-79 YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		23.1	23.2	23.2	23.4	23.4	23.5	23.6	23.6	23.6	23.6	23.6	23.6	23.6	23.6	23.6
≥ 20000		30.9	31.4	31.4	31.6	31.6	31.7	31.8	31.8	31.8	31.8	31.8	31.8	31.8	31.8	31.8
≥ 18000		35.5	36.1	36.1	36.3	36.3	36.4	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5	36.5
≥ 16000		37.1	38.7	38.7	38.8	38.8	38.9	39.1	39.1	39.1	39.1	39.1	39.1	39.1	39.1	39.1
≥ 14000		38.8	40.7	40.7	40.8	40.8	41.0	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1	41.1
≥ 12000		42.1	44.1	44.1	44.3	44.3	44.4	44.5	44.5	44.5	44.5	44.5	44.5	44.5	44.5	44.5
≥ 10000		44.4	46.4	46.4	46.7	46.7	46.9	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0
≥ 9000		44.4	46.4	46.4	46.7	46.7	46.9	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0	47.0
≥ 8000		47.4	49.5	49.5	49.7	49.7	49.9	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0	50.0
≥ 7000		48.8	50.8	50.8	51.1	51.4	51.5	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6	51.6
≥ 6000		49.5	51.5	51.5	51.8	52.0	52.2	52.3	52.3	52.3	52.3	52.3	52.3	52.3	52.3	52.3
≥ 5000		51.0	53.1	53.1	53.6	53.8	54.0	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1	54.1
≥ 4500		51.2	53.4	53.4	53.8	54.1	54.2	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4
≥ 4000		54.5	57.1	57.1	57.5	57.8	57.9	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1	58.1
≥ 3500		57.5	60.0	60.0	60.5	60.8	60.9	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1	61.1
≥ 3000		67.3	71.8	71.8	73.4	73.6	73.8	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 2500		71.6	76.1	76.8	79.5	79.8	80.1	80.5	80.5	80.6	80.6	80.6	80.6	80.6	80.6	80.6
≥ 2000		76.8	83.1	83.9	88.3	88.8	89.1	89.9	89.9	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 1800		78.0	84.3	85.1	90.4	91.0	91.3	92.1	92.1	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 1500		78.8	85.7	86.7	93.0	93.9	94.4	95.5	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1200		79.5	86.5	87.6	94.5	95.6	96.2	97.4	97.8	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 1000		79.5	86.5	87.6	94.7	95.8	96.3	97.5	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 900		79.5	86.5	87.6	94.9	96.0	96.6	97.8	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 800		79.5	86.6	87.7	95.1	96.2	96.7	98.1	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 700		79.5	86.6	87.7	95.5	96.6	97.3	98.6	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 600		79.5	86.6	87.7	95.6	96.7	97.5	98.9	99.3	99.5	99.6	99.6	99.6	99.6	99.6	99.6
≥ 500		79.5	86.6	87.7	95.8	96.9	97.8	99.2	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		79.5	86.6	87.7	95.8	96.9	97.8	99.2	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		79.6	86.7	87.8	95.9	97.0	98.0	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		79.6	86.7	87.8	95.9	97.0	98.0	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		79.6	86.7	87.8	95.9	97.0	98.0	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		79.6	86.7	87.8	95.9	97.0	98.0	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 732

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2000 (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		23.1	23.8	23.8	23.9	24.1	24.2	24.3	24.3	24.3	24.3	24.5	24.5	24.5	24.5	24.5
≥ 20000		30.4	31.2	31.2	31.4	31.5	31.6	31.8	31.8	31.8	31.8	31.9	31.9	31.9	31.9	31.9
≥ 18000		34.1	35.3	35.3	35.5	35.7	35.8	35.9	35.9	35.9	35.9	36.1	36.1	36.1	36.1	36.1
≥ 16000		34.1	35.3	35.3	35.8	35.9	36.1	36.2	36.2	36.2	36.2	36.4	36.4	36.4	36.4	36.4
≥ 14000		36.2	38.4	38.4	38.9	39.1	39.2	39.3	39.3	39.3	39.3	39.5	39.5	39.5	39.5	39.5
≥ 12000		37.7	39.9	39.9	40.4	40.5	40.7	40.8	40.8	40.8	40.8	40.9	40.9	40.9	40.9	40.9
≥ 10000		40.9	43.2	43.2	43.9	44.1	44.2	44.3	44.3	44.3	44.3	44.5	44.5	44.5	44.5	44.5
≥ 9000		41.1	43.4	43.4	44.1	44.2	44.3	44.5	44.5	44.5	44.5	44.6	44.6	44.6	44.6	44.6
≥ 8000		44.1	47.3	47.3	48.1	48.2	48.4	48.5	48.5	48.5	48.5	48.6	48.6	48.6	48.6	48.6
≥ 7000		44.9	48.1	48.1	49.2	49.3	49.5	49.6	49.6	49.6	49.6	49.7	49.7	49.7	49.7	49.7
≥ 6000		48.0	48.2	48.2	49.3	49.5	49.6	49.7	49.7	49.7	49.7	49.9	49.9	49.9	49.9	49.9
≥ 5000		49.6	50.1	50.1	51.2	51.4	51.5	51.6	51.6	51.6	51.6	51.8	51.8	51.8	51.8	51.8
≥ 4500		46.8	50.3	50.3	51.4	51.5	51.6	51.8	51.8	51.8	51.8	51.9	51.9	51.9	51.9	51.9
≥ 4000		50.9	54.3	54.3	55.7	55.8	55.9	56.1	56.1	56.1	56.1	56.2	56.2	56.2	56.2	56.2
≥ 3500		51.9	55.9	55.9	57.4	57.7	57.8	58.0	58.0	58.0	58.0	58.1	58.1	58.1	58.1	58.1
≥ 3000		63.6	69.7	70.3	72.8	73.1	73.2	73.4	73.4	73.4	73.4	73.5	73.5	73.5	73.5	73.5
≥ 2500		71.5	79.2	80.1	83.6	84.1	84.2	84.3	84.3	84.3	84.3	84.5	84.5	84.5	84.5	84.5
≥ 2000		75.5	85.0	86.2	90.8	91.5	91.6	91.8	91.8	91.8	91.8	91.9	91.9	91.9	91.9	92.0
≥ 1800		75.8	85.4	86.6	91.8	92.4	92.6	92.7	92.7	92.7	92.7	92.8	92.8	92.8	92.8	93.0
≥ 1500		76.4	86.4	88.0	93.5	94.5	94.9	95.3	95.3	95.3	95.3	95.4	95.4	95.4	95.4	95.5
≥ 1200		76.5	87.2	88.8	94.6	95.7	96.2	96.9	97.0	97.2	97.2	97.3	97.3	97.3	97.3	97.4
≥ 1000		76.5	87.4	89.1	95.4	96.5	97.0	97.7	97.8	98.1	98.1	98.2	98.2	98.2	98.2	98.4
≥ 900		76.5	87.4	89.1	95.4	96.5	97.0	97.7	97.8	98.1	98.1	98.2	98.2	98.2	98.2	98.4
≥ 800		76.5	87.4	89.1	95.4	96.5	97.0	97.7	97.8	98.1	98.1	98.2	98.2	98.2	98.2	98.4
≥ 700		76.5	87.4	89.1	95.4	96.6	97.2	97.8	98.0	98.2	98.2	98.4	98.4	98.4	98.4	98.5
≥ 600		76.5	87.4	89.1	95.5	96.9	97.4	98.1	98.2	98.5	98.6	98.8	98.8	98.8	98.8	98.9
≥ 500		76.5	87.4	89.1	96.1	97.4	98.0	98.6	98.8	99.2	99.5	99.6	99.6	99.6	99.6	99.7
≥ 400		76.5	87.4	89.1	96.1	97.4	98.0	98.6	98.8	99.2	99.5	99.6	99.6	99.6	99.6	99.7
≥ 300		76.5	87.4	89.1	96.1	97.4	98.0	98.6	98.8	99.2	99.5	99.6	99.6	99.6	99.6	99.7
≥ 200		76.5	87.4	89.1	96.1	97.4	98.0	98.6	98.8	99.2	99.5	99.6	99.6	99.6	99.6	99.7
≥ 100		76.5	87.4	89.1	96.1	97.4	98.0	98.6	98.8	99.2	99.5	99.6	99.6	99.6	99.6	99.7
≥ 0		76.8	87.7	89.3	96.4	97.7	98.2	98.9	99.1	99.5	99.7	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 740

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

12 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		31.2	32.6	33.6	33.2	33.2	33.2	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4
≥ 20000		34.6	36.3	36.3	36.6	36.6	36.6	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.9
≥ 18000		38.1	40.1	40.1	41.1	41.1	41.1	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3	41.3
≥ 16000		38.1	40.2	40.2	41.3	41.3	41.3	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4	41.4
≥ 14000		39.4	42.3	42.3	43.1	43.1	43.1	43.2	43.2	43.2	43.2	43.2	43.2	43.2	43.2	43.2
≥ 12000		41.3	44.8	44.8	46.0	46.0	46.0	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2	46.2
≥ 10000		43.1	46.9	46.9	48.4	48.4	48.4	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5
≥ 9000		43.1	46.9	46.9	48.4	48.4	48.4	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5	48.5
≥ 8000		44.7	48.8	48.8	50.4	50.4	50.4	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5	50.5
≥ 7000		45.2	49.5	49.5	51.1	51.1	51.1	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 6000		45.2	49.5	49.5	51.1	51.1	51.1	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 5000		46.0	50.5	50.5	52.2	52.2	52.2	52.3	52.3	52.3	52.3	52.3	52.3	52.3	52.3	52.3
≥ 4500		46.3	50.8	50.8	52.5	52.5	52.5	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6	52.6
≥ 4000		46.9	53.8	53.8	55.6	55.6	55.6	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7	55.7
≥ 3500		49.7	54.6	54.6	56.4	56.4	56.4	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5	56.5
≥ 3000		63.2	69.1	69.2	72.1	72.1	72.1	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2	72.2
≥ 2500		7 .0	76.6	77.5	81.9	81.9	82.0	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2	82.2
≥ 2000		74.0	82.4	83.7	89.8	90.2	90.7	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.1
≥ 1800		74.8	83.4	84.7	91.4	91.8	92.5	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8	92.8
≥ 1500		75.1	83.9	85.6	93.2	93.6	94.4	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8	94.8
≥ 1200		75.7	85.1	86.8	95.2	95.6	97.1	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 1000		75.7	85.3	86.9	95.9	96.3	98.0	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 900		75.7	85.3	86.9	95.9	96.3	98.0	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 800		75.9	85.6	87.2	96.3	96.7	98.4	98.9	99.3	99.0	99.0	99.0	99.2	99.3	99.0	99.0
≥ 700		75.9	85.6	87.2	96.3	96.7	98.4	98.9	99.3	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 600		75.9	85.6	87.3	96.5	96.9	98.5	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
≥ 500		75.9	85.6	87.3	96.9	97.3	98.9	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		75.9	85.6	87.3	96.9	97.3	98.9	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		75.9	85.6	87.3	96.9	97.3	98.9	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		75.9	85.6	87.3	96.9	97.3	98.9	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		75.9	85.6	87.3	96.9	97.3	98.9	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		75.9	85.6	87.3	96.9	97.3	98.9	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 734

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		21.9	23.9	24.8	26.0	26.3	27.2	27.2	27.3	27.2	27.2	27.3	27.3	27.3	27.3	27.3
≥ 20000		29.6	29.9	29.1	31.5	31.7	32.5	32.7	32.7	32.7	32.8	32.8	32.8	32.8	32.8	32.8
≥ 18000		29.2	32.2	32.2	35.0	35.3	36.1	36.3	36.3	36.4	36.4	36.4	36.5	36.5	36.5	36.5
≥ 16000		29.4	32.4	32.5	35.3	35.6	36.4	36.6	36.6	36.7	36.7	36.7	36.7	36.7	36.7	36.7
≥ 14000		31.6	33.8	33.9	36.8	37.2	38.0	38.2	38.2	38.2	38.3	38.3	38.3	38.3	38.3	38.3
≥ 12000		32.3	35.9	36.0	39.1	39.5	40.3	40.5	40.5	40.5	40.6	40.6	40.6	40.6	40.6	40.6
≥ 10000		34.9	38.8	39.1	42.7	43.1	43.9	44.1	44.1	44.1	44.3	44.3	44.3	44.3	44.3	44.3
≥ 9000		34.9	38.9	39.1	42.7	43.1	43.9	44.1	44.1	44.2	44.3	44.3	44.3	44.3	44.3	44.3
≥ 8000		37.2	41.5	41.7	45.6	46.1	46.9	47.1	47.1	47.2	47.3	47.3	47.4	47.4	47.4	47.4
≥ 7000		38.0	42.4	42.7	46.7	47.2	48.1	48.3	48.3	48.4	48.5	48.5	48.6	48.6	48.6	48.6
≥ 6000		38.3	42.8	43.1	47.2	47.7	48.5	48.7	48.7	48.8	49.0	49.0	49.0	49.0	49.0	49.0
≥ 5000		39.3	43.9	44.1	48.3	48.8	49.7	49.8	49.9	49.9	50.1	50.1	50.1	50.1	50.1	50.1
≥ 4500		39.4	44.0	44.3	48.5	49.0	49.8	50.0	50.0	50.1	50.3	50.3	50.3	50.3	50.3	50.3
≥ 4000		42.3	47.2	47.6	52.1	52.7	53.5	53.7	53.7	53.8	54.0	54.0	54.0	54.0	54.0	54.0
≥ 3500		43.9	48.8	49.2	53.9	54.5	55.3	55.5	55.5	55.6	55.8	55.8	55.8	55.8	55.8	55.8
≥ 3000		53.9	6 .2	61.0	67.3	68.0	69.0	69.2	69.3	69.4	69.6	69.6	69.7	69.7	69.7	69.7
≥ 2500		63.1	67.5	68.7	76.6	77.5	78.5	78.9	79.0	79.1	79.3	79.3	79.4	79.4	79.4	79.4
≥ 2000		64.4	73.3	74.8	84.5	85.9	87.1	87.7	87.7	87.9	88.1	88.1	88.2	88.2	88.2	88.2
≥ 1800		65.3	74.7	76.3	86.5	88.3	89.3	89.9	90.0	90.1	90.3	90.4	90.4	90.4	90.4	90.4
≥ 1500		66.1	75.9	77.7	89.2	90.9	92.4	93.2	93.4	93.6	93.8	93.9	93.9	93.9	93.9	93.9
≥ 1200		66.4	76.6	78.6	91.0	92.9	94.5	95.6	95.8	96.2	96.4	96.4	96.5	96.5	96.5	96.5
≥ 1000		66.4	76.7	78.7	91.6	93.5	95.3	96.6	96.7	97.2	97.4	97.4	97.5	97.5	97.5	97.5
≥ 900		66.4	76.7	78.7	91.7	93.7	95.6	96.8	97.0	97.4	97.6	97.7	97.7	97.7	97.7	97.8
≥ 800		66.5	76.9	78.9	92.0	94.0	95.9	97.3	97.5	98.0	98.2	98.3	98.3	98.3	98.3	98.4
≥ 700		66.5	76.9	78.9	92.1	94.2	96.2	97.6	97.8	98.2	98.5	98.5	98.6	98.6	98.6	98.6
≥ 600		66.5	76.9	79.0	92.2	94.4	96.4	97.9	98.1	98.6	98.9	99.0	99.0	99.0	99.0	99.1
≥ 500		66.5	76.9	79.0	92.4	94.6	96.7	98.4	98.6	99.2	99.5	99.6	99.6	99.6	99.6	99.7
≥ 400		66.5	76.9	79.0	92.5	94.6	96.8	98.4	98.7	99.3	99.6	99.7	99.7	99.7	99.7	99.8
≥ 300		66.5	76.9	79.0	92.5	94.7	96.8	98.5	98.8	99.4	99.7	99.7	99.8	99.8	99.8	99.8
≥ 200		66.6	76.9	79.0	92.5	94.7	96.8	98.5	98.8	99.4	99.8	99.8	99.9	99.9	99.9	99.9
≥ 100		66.6	76.9	79.0	92.5	94.7	96.8	98.6	98.8	99.4	99.8	99.8	99.9	99.9	99.9	100.0
≥ 0		66.6	77.0	79.1	92.6	94.7	96.9	98.6	98.9	99.5	99.8	99.9	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 5777

USAF ETAC FORM AM 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

.1C (STATION) TAEGU AB KO (STATION NAME) 66-70,74-79 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0200 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		44.9	45.6	45.8	48.6	48.6	48.8	48.8	48.8	48.8	48.8	48.8	49.0	49.0	49.0	49.1
≥ 20000		47.0	47.8	47.8	5 .6	50.6	50.9	50.9	50.9	50.9	50.9	50.9	51.0	51.0	51.0	51.1
≥ 18000		49.9	51.2	51.2	54.1	54.1	54.3	54.3	54.3	54.3	54.3	54.3	54.5	54.5	54.5	54.6
≥ 16000		5 .1	51.4	51.4	54.3	54.3	54.6	54.6	54.6	54.6	54.6	54.6	54.8	54.8	54.8	54.8
≥ 14000		51.4	51.7	51.7	54.6	54.6	54.9	54.9	54.9	54.9	54.9	54.9	55.1	55.1	55.1	55.1
≥ 12000		51.4	52.9	52.9	55.8	55.8	56.1	56.1	56.1	56.1	56.1	56.1	56.2	56.2	56.2	56.2
≥ 10000		53.9	55.9	56.1	59.7	59.7	6 .0	60.0	60.0	60.0	60.0	60.0	60.1	60.1	60.1	60.1
≥ 9000		53.9	55.9	56.1	59.7	59.7	60.0	60.0	60.0	60.0	60.0	60.0	60.1	60.1	60.1	60.1
≥ 8000		57.0	59.9	60.0	63.6	63.6	63.9	63.9	63.9	63.9	63.9	63.9	64.1	64.1	64.1	64.1
≥ 7000		58.1	61.0	61.2	64.8	64.8	65.1	65.1	65.1	65.1	65.1	65.1	65.2	65.2	65.2	65.2
≥ 6000		58.1	61.0	61.2	64.8	64.8	65.1	65.1	65.1	65.1	65.1	65.1	65.2	65.2	65.2	65.2
≥ 5000		59.4	62.3	62.5	66.2	66.2	66.5	66.5	66.5	66.5	66.5	66.5	66.7	66.7	66.7	66.7
≥ 4500		59.4	62.3	62.5	66.2	66.2	66.5	66.5	66.5	66.5	66.5	66.5	66.7	66.7	66.7	66.7
≥ 4000		62.2	65.4	65.5	69.7	69.7	70.0	70.0	70.0	70.0	70.0	70.0	70.1	70.1	70.1	70.1
≥ 3500		63.5	66.7	66.8	71.0	71.0	71.3	71.3	71.3	71.3	71.3	71.3	71.4	71.4	71.4	71.4
≥ 3000		76.1	81.6	81.7	87.1	87.1	87.4	87.4	87.4	87.4	87.4	87.4	87.5	87.5	87.5	87.5
≥ 2500		79.4	86.1	86.7	93.0	93.2	93.6	93.6	93.6	93.8	93.8	93.8	93.9	93.9	93.9	93.9
≥ 2000		8 .4	88.3	88.8	95.8	95.9	96.5	96.5	96.5	96.7	96.7	96.7	96.8	96.8	96.8	96.8
≥ 1800		80.4	88.4	89.3	96.7	96.8	97.5	97.5	97.5	97.7	97.7	97.7	97.8	97.8	97.8	97.8
≥ 1500		80.6	88.8	90.0	98.0	98.1	98.8	98.8	98.8	99.0	99.0	99.0	99.1	99.1	99.1	99.1
≥ 1200		80.6	88.8	90.0	98.0	98.1	98.8	98.8	98.8	99.0	99.0	99.0	99.1	99.1	99.1	99.1
≥ 1000		80.6	88.8	90.0	98.0	98.1	98.8	98.8	98.8	99.0	99.0	99.0	99.1	99.1	99.1	99.1
≥ 900		80.6	88.8	90.0	98.0	98.1	98.8	98.8	98.8	99.0	99.0	99.0	99.1	99.1	99.1	99.1
≥ 800		80.7	89.0	90.1	98.3	98.6	99.3	99.3	99.3	99.4	99.4	99.4	99.6	99.6	99.6	99.6
≥ 700		80.7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 600		80.7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 500		80.7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.7	99.7	99.7	99.9	99.9	99.9	99.9
≥ 400		80.7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.7	99.7	99.7	100.0	100.0	100.0	100.0
≥ 300		80.7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.7	99.7	99.7	100.0	100.0	100.0	100.0
≥ 200		8 .7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.7	99.7	99.7	100.0	100.0	100.0	100.0
≥ 100		8 .7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.7	99.7	99.7	100.0	100.0	100.0	100.0
≥ 0		8 .7	89.0	90.1	98.3	98.6	99.4	99.4	99.4	99.7	99.7	99.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 696

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] 12 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-1500 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		35.6	39.1	39.1	42.5	42.9	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6
≥ 20000		36.7	41.0	41.1	44.5	44.9	46.6	46.6	46.6	46.6	46.6	46.6	46.6	46.6	46.6	46.6
≥ 18000		39.0	43.6	43.8	47.4	47.8	49.6	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9
≥ 16000		39.0	43.6	43.8	47.4	47.8	49.6	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9
≥ 14000		39.5	43.8	43.9	47.5	48.0	49.8	50.1	50.1	50.2	50.2	50.2	50.2	50.2	50.2	50.2
≥ 12000		39.6	44.7	44.9	48.5	48.9	50.8	51.1	51.1	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 10000		44.9	50.5	50.6	55.5	56.0	57.8	58.1	58.1	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 9000		44.9	50.5	50.6	55.5	56.0	57.8	58.1	58.1	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 8000		49.5	55.8	56.0	61.4	61.9	63.7	64.0	64.0	64.1	64.1	64.1	64.1	64.1	64.1	64.1
≥ 7000		51.5	57.9	58.1	63.5	64.0	65.8	66.1	66.1	66.2	66.2	66.2	66.2	66.2	66.2	66.2
≥ 6000		51.6	58.1	58.2	63.7	64.1	65.9	66.2	66.2	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 5000		52.6	59.0	59.2	64.9	65.4	67.2	67.5	67.5	67.6	67.6	67.6	67.6	67.6	67.6	67.6
≥ 4500		52.6	59.0	59.2	64.9	65.4	67.2	67.5	67.5	67.6	67.6	67.6	67.6	67.6	67.6	67.6
≥ 4000		53.9	60.6	60.7	66.9	67.3	69.1	69.4	69.4	69.6	69.6	69.6	69.6	69.6	69.6	69.6
≥ 3500		55.7	62.6	62.8	69.1	69.6	71.5	71.8	71.8	71.9	71.9	71.9	71.9	71.9	71.9	71.9
≥ 3000		66.5	74.8	75.2	83.6	84.0	86.0	86.3	86.3	86.4	86.4	86.4	86.4	86.4	86.4	86.4
≥ 2500		69.8	79.2	79.8	89.2	89.8	91.9	92.1	92.1	92.3	92.3	92.3	92.3	92.3	92.3	92.3
≥ 2000		71.1	81.2	82.5	93.4	94.0	96.1	96.4	96.4	96.5	96.5	96.5	96.5	96.5	96.5	96.5
≥ 1800		71.4	81.8	83.0	94.2	94.8	96.9	97.2	97.2	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1500		71.4	82.0	83.5	95.2	95.8	98.0	98.3	98.3	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 1200		71.4	82.0	83.5	95.5	96.1	98.5	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1000		71.4	82.0	83.5	95.5	96.1	98.5	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 900		71.4	82.0	83.5	95.5	96.1	98.5	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 800		71.4	82.0	83.5	95.5	96.4	98.7	99.3	99.3	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		71.4	82.0	83.5	95.5	96.4	98.7	99.3	99.3	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600		71.4	82.0	83.5	95.5	96.4	98.9	99.4	99.4	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500		71.4	82.0	83.5	95.5	96.4	98.9	99.4	99.4	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		71.4	82.0	83.5	95.5	96.4	98.9	99.4	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 300		71.4	82.0	83.5	95.5	96.4	98.9	99.4	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 200		71.4	82.0	83.5	95.5	96.4	98.9	99.4	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 100		71.4	82.0	83.5	95.5	96.4	98.9	99.4	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0
≥ 0		71.4	82.0	83.5	95.5	96.4	98.9	99.4	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 717

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]-TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | AUG MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		23.1	26.9	28.2	31.6	32.2	34.7	35.3	35.4	35.6	35.6	35.7	36.[illegible]	36.[illegible]	36.1	36.1
≥ 20000		25.4	27.2	30.6	34.1	34.7	37.3	37.8	38.0	38.1	38.1	38.2	38.5	38.5	38.7	38.7
≥ 18000		26.1	30.3	31.4	35.7	36.3	38.8	39.4	39.5	39.9	39.9	40.1	40.4	40.4	40.5	40.5
≥ 16000		26.5	30.5	31.9	36.1	36.7	39.2	39.8	39.9	40.4	40.4	40.5	40.8	40.8	40.9	40.9
≥ 14000		27.1	31.2	32.6	37.3	37.8	40.5	41.1	41.2	41.6	41.6	41.8	42.1	42.1	42.2	42.2
≥ 12000		28.2	32.7	34.1	39.1	39.7	42.4	42.9	43.1	43.5	43.5	43.6	43.9	43.9	44.1	44.1
≥ 10000		30.6	36.0	37.5	43.2	43.8	46.6	47.2	47.3	47.9	47.9	48.[illegible]	48.3	48.3	48.6	48.6
≥ 9000		30.6	36.0	37.5	43.2	43.8	46.6	47.2	47.3	47.9	47.9	48.[illegible]	48.3	48.3	48.6	48.6
≥ 8000		33.9	39.9	42.1	48.3	49.2	52.0	52.5	52.7	53.3	53.3	53.4	53.7	53.7	54.0	54.0
≥ 7000		34.4	40.7	43.1	49.4	50.4	53.3	53.8	54.0	54.5	54.5	54.7	55.0	55.0	55.2	55.2
≥ 6000		35.1	41.6	44.1	50.6	51.6	54.4	55.0	55.1	55.7	55.7	55.8	56.1	56.1	56.4	56.4
≥ 5000		35.8	42.4	44.8	51.6	52.7	55.7	56.2	56.4	56.9	56.9	57.1	57.4	57.4	57.6	57.6
≥ 4500		36.0	42.5	44.9	51.7	52.8	55.9	56.5	56.7	57.2	57.2	57.4	57.6	57.6	57.9	57.9
≥ 4000		37.8	44.8	47.6	54.5	55.8	58.9	59.5	59.6	60.2	60.2	60.3	60.6	60.6	60.9	60.9
≥ 3500		38.7	45.8	48.6	55.7	56.9	60.1	60.6	60.8	61.3	61.3	61.5	61.8	61.8	62.0	62.0
≥ 3000		47.7	56.7	59.9	69.1	70.4	73.7	74.2	74.4	75.1	75.1	75.2	75.5	75.5	75.8	75.8
≥ 2500		53.1	63.5	67.0	76.8	78.2	81.6	82.4	82.6	83.3	83.3	83.4	83.7	83.7	84.0	84.0
≥ 2000		55.5	66.4	70.5	81.6	83.4	87.3	88.4	88.5	89.2	89.2	89.4	89.7	89.7	89.9	89.9
≥ 1800		55.7	66.6	71.0	82.4	84.3	88.1	89.4	89.5	90.2	90.2	90.4	90.7	90.7	90.9	90.9
≥ 1500		55.9	67.3	71.8	83.6	86.0	89.9	91.5	91.6	92.9	92.9	93.1	93.3	93.3	93.6	93.6
≥ 1200		55.9	67.7	72.4	84.3	86.8	90.8	92.6	92.8	94.5	94.5	94.6	94.9	94.9	95.2	95.2
≥ 1000		55.9	68.0	72.8	85.0	87.7	91.8	93.6	93.8	95.9	96.2	96.3	96.9	96.9	97.2	97.3
≥ 900		55.9	68.0	72.8	85.0	87.7	91.8	93.6	93.8	95.9	96.2	96.3	96.9	96.9	97.2	97.3
≥ 800		55.9	68.0	72.9	85.4	88.1	92.2	94.1	94.2	96.3	96.6	96.7	97.3	97.3	97.6	97.7
≥ 700		55.9	68.0	72.9	85.4	88.1	92.2	94.1	94.3	96.6	96.9	97.[illegible]	97.6	97.6	97.9	98.0
≥ 600		55.9	68.0	72.9	85.4	88.2	92.5	94.3	94.6	97.0	97.3	97.5	98.0	98.0	98.3	98.7
≥ 500		55.9	68.0	72.9	85.4	88.2	92.5	94.6	94.9	97.3	97.6	97.7	98.3	98.3	98.6	99.0
≥ 400		56.1	68.1	73.1	85.6	88.4	92.6	94.8	95.0	97.5	97.7	97.9	98.6	98.6	99.0	99.4
≥ 300		56.1	68.1	73.1	85.6	88.4	92.6	94.8	95.[illegible]	97.5	97.9	98.[illegible]	98.7	98.7	99.2	99.6
≥ 200		56.1	68.1	73.1	85.7	88.5	92.8	94.9	95.2	97.6	98.0	98.2	98.9	98.9	99.3	99.7
≥ 100		56.1	68.1	73.1	85.7	88.5	92.9	95.0	95.3	97.9	98.3	98.4	99.2	99.2	99.6	100.0
≥ 0		56.1	68.1	73.1	85.7	88.5	92.9	95.0	95.3	97.9	98.3	98.4	99.2	99.2	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 706

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...RAL CLIMATOLOGY BRANCH
...ETAC
A... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | ...AEDC AB KO (STATION NAME) | 58-70,74-79 (YEARS) | AUG (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

...900-1100 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		26.3	29.7	30.6	34.2	35.5	36.2	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8	36.8
≥ 20000		31.8	35.6	36.5	40.5	41.7	42.6	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1	43.1
≥ 18000		33.1	36.9	37.8	42.0	43.3	44.1	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0
≥ 16000		33.9	37.8	38.6	42.9	44.1	45.0	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8	45.8
≥ 14000		35.4	39.3	40.2	45.0	46.3	47.1	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9
≥ 12000		37.1	41.7	42.9	47.8	49.5	50.5	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3	51.3
≥ 10000		38.9	44.0	45.4	50.4	52.2	53.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2
≥ 9000		38.9	44.0	45.4	50.4	52.2	53.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2	54.2
≥ 8000		40.9	46.4	47.9	53.2	55.0	56.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0
≥ 7000		41.4	47.4	49.2	54.9	56.7	57.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7
≥ 6000		41.7	47.7	49.5	55.3	57.1	58.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1	59.1
≥ 5000		42.9	48.9	50.9	56.7	58.6	59.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5	60.5
≥ 4500		43.4	49.5	51.5	57.4	59.3	60.3	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2	61.2
≥ 4000		45.7	51.9	54.0	60.4	62.2	63.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 3500		48.7	55.3	57.6	63.9	65.8	66.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8	67.8
≥ 3000		55.9	64.6	67.3	74.0	76.1	77.1	78.2	78.4	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 2500		60.3	70.3	73.1	80.8	83.5	84.4	85.6	85.7	85.7	85.7	85.7	85.7	85.7	85.7	85.7
≥ 2000		62.2	73.3	76.7	85.1	88.4	89.7	90.8	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9
≥ 1800		62.8	74.1	77.5	86.6	89.8	91.1	92.2	92.4	92.4	92.4	92.4	92.4	92.4	92.4	92.4
≥ 1500		63.1	74.4	78.2	88.0	91.8	93.2	94.3	94.6	94.6	94.6	94.6	94.6	94.6	94.6	94.6
≥ 1200		63.2	75.0	78.9	89.3	93.2	94.8	96.3	96.9	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 1000		63.2	75.0	78.9	89.5	93.9	95.5	97.2	97.9	98.0	98.2	98.2	98.2	98.2	98.2	98.2
≥ 900		63.2	75.0	78.9	89.5	94.1	95.6	97.3	98.0	98.2	98.3	98.3	98.3	98.3	98.3	98.3
≥ 800		63.4	75.1	79.1	90.0	94.5	96.0	97.7	98.4	98.6	98.7	98.7	98.7	98.7	98.7	98.7
≥ 700		63.4	75.1	79.1	90.1	94.8	96.3	98.0	98.7	98.9	99.0	99.0	99.0	99.0	99.0	99.0
≥ 600		63.4	75.1	79.1	90.1	94.9	96.5	98.2	98.9	99.0	99.2	99.2	99.2	99.2	99.2	99.2
≥ 500		63.4	75.1	79.1	90.1	95.0	96.7	98.6	99.3	99.4	99.6	99.6	99.6	99.6	99.6	99.6
≥ 400		63.4	75.1	79.1	90.1	95.0	96.7	98.9	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		63.4	75.1	79.1	90.1	95.0	96.7	98.9	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		63.4	75.1	79.1	90.1	95.0	96.7	98.9	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 100		63.4	75.1	79.1	90.1	95.0	96.7	98.9	99.6	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 0		63.4	75.1	79.1	90.1	95.2	96.9	99.0	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 727

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 — STATION — AEGC A; AB — STATION NAME — 68-70,74-79 — YEARS — AUG — MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

12-3-14[illegible] — HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥¼	≥0	
NO CEILING		3[illegible].8	3[illegible].9	37.1	34.9	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.0	35.[illegible]	[illegible]
≥ 20000		36.3	39.1	39.4	41.3	41.5	41.5	41.5	41.5	41.5	41.5	41.5	41.5	41.5	41.5	41.5
≥ 18000		39.2	42.[illegible]	42.3	44.4	44.5	44.5	44.5	44.5	44.5	44.5	44.5	44.5	44.5	44.5	44.5
≥ 16000		39.4	42.3	42.4	44.5	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7	44.7
≥ 14000		41.2	44.1	44.4	46.6	46.6	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8
≥ 12000		43.7	46.[illegible]	47.1	49.6	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7	49.7
≥ 10000		45.3	49.2	48.5	51.[illegible]	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1
≥ 9000		46.0	49.2	48.5	51.0	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1
≥ 8000		46.1	49.6	49.[illegible]	52.5	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7
≥ 7000		46.9	50.6	50.6	53.5	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6	53.6
≥ 6000		47.2	50.9	51.1	53.8	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9
≥ 5000		48.3	52.1	52.4	55.0	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2	55.2
≥ 4500		48.5	52.4	52.7	55.3	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5	55.5
≥ 4000		54.6	59.1	59.4	62.2	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3	62.3
≥ 3500		59.7	64.3	64.6	67.4	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 3000		73.0	76.1	76.8	80.4	80.5	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7
≥ 2500		75.5	82.4	83.3	87.7	88.1	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 2000		78.2	86.1	87.8	94.1	95.0	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1800		78.6	86.7	88.7	95.0	95.8	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9
≥ 1500		79.0	87.7	89.6	96.1	97.1	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1200		79.7	89.5	91.5	97.1	98.3	98.5	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 1000		79.8	88.7	9[illegible].6	97.5	98.6	99.0	99.2	99.2	99.2	99.2	99.2	99.2	99.[illegible]	99.2	99.2
≥ 900		79.8	88.8	90.3	97.6	98.7	99.2	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 800		79.8	88.9	90.9	98.0	99.2	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 700		79.8	88.9	90.9	98.0	99.2	99.6	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 600		79.8	88.9	90.9	98.2	99.3	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		79.8	88.9	90.9	98.2	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.[illegible]
≥ 400		79.8	88.9	9[illegible].9	98.2	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	1[illegible].0	1[illegible].[illegible]
≥ 300		79.8	88.9	9[illegible].9	98.2	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	1[illegible].[illegible]
≥ 200		79.8	88.9	9[illegible].9	98.2	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	1[illegible].[illegible]
≥ 100		79.8	88.9	9[illegible].9	98.2	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	1[illegible].[illegible]
≥ 0		79.8	88.9	9[illegible].9	98.2	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	1[illegible].[illegible]

TOTAL NUMBER OF OBSERVATIONS 71[illegible]

USAF ETAC FORM 10L 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...RAL CLIMATOLOGY BRANCH
...AFETAC
...WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1... (STATION) | ...AEGU A... K) (STATION NAME) | 68-79, 74-79 (YEARS) | AU... (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

...00-17... (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		...2	3...7	36.7	37....	37.0	37.0	37.0	37.0	37.0	37.0	37.0	37....	37....	37....	37....
≥ 20000		43.1	44.6	44.6	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8
≥ 18000		47....	47.4	47.4	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1	48.1
≥ 16000		46.1	47.6	47.6	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3
≥ 14000		47.3	48.7	48.7	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4	49.4
≥ 12000		46.1	47.6	47.6	5...3	5...3	5...3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3
≥ 10000		51.3	53.2	53.2	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9
≥ 9000		51.3	53.2	53.2	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9	53.9
≥ 8000		54.3	56.2	56.2	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9	56.9
≥ 7000		55.4	57.4	57.4	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 6000		56.6	57.6	57.6	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3	58.3
≥ 5000		59.0	59.0	59.0	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7
≥ 4500		59.0	59.0	59.0	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7	59.7
≥ 4000		62.5	64.8	64.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 3500		66.3	68.9	69.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 3000		77.4	81.1	81.7	82.7	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8
≥ 2500		87.7	88.7	88.8	90.1	90.3	90.3	90.3	90.3	90.3	90.3	90.3	90.4	90.4	90.4	90.4
≥ 2000		84.8	91.8	93.1	95.1	95.3	95.3	95.3	95.3	95.3	95.3	95.3	95.4	95.4	95.4	95.4
≥ 1800		85.2	92.4	93.7	95.7	95.8	96.0	96.0	96....	96.0	96.1	96....	96.1	96.1	96.1	96.1
≥ 1500		85.5	93.1	94.6	97.1	97.3	97.7	98.0	98....	98.0	98.1	98.1	98.4	98.4	98.4	98.4
≥ 1200		86.0	94.0	95.4	98.0	98.1	98.6	99.0	99.0	99.0	99.1	99.1	99.4	99.4	99.4	99.4
≥ 1000		86.3	94.0	95.4	98.0	98.1	98.6	99.0	99.0	99.0	99.1	99.1	99.4	99.4	99.4	99.4
≥ 900		86.0	94.0	95.4	98.0	98.1	98.6	99.0	99.0	99.0	99.1	99.1	99.4	99.4	99.4	99.4
≥ 800		86.0	94.0	95.4	98.0	98.3	98.7	99.1	99.1	99.1	99.3	99.3	99.6	99.6	99.6	99.6
≥ 700		86.0	94.0	95.4	98.0	98.3	98.7	99.1	99.1	99.1	99.3	99.3	99.6	99.6	99.6	99.6
≥ 600		86.0	94.0	95.4	98.0	98.3	98.7	99.1	99.1	99.1	99.3	99.3	99.6	99.6	99.6	99.6
≥ 500		86.1	94.1	95.6	98.1	98.4	98.9	99.3	99.3	99.3	99.4	99.4	99.7	99.7	99.7	99.7
≥ 400		86.1	94.1	95.6	98.1	98.4	98.9	99.3	99.3	99.3	99.4	99.4	99.7	99.7	99.7	99.7
≥ 300		86.1	94.1	95.6	98.1	98.4	98.9	99.3	99.3	99.3	99.4	99.4	99.7	99.7	99.7	99.7
≥ 200		86.1	94.1	95.6	98.1	98.4	98.9	99.3	99.3	99.3	99.4	99.4	99.7	99.7	99.7	99.7
≥ 100		86.1	94.1	95.6	98.1	98.4	98.9	99.3	99.3	99.3	99.4	99.4	99.7	99.7	99.7	99.7
≥ 0		86.4	94.4	95.8	98.4	98.7	99.1	99.6	99.6	99.6	99.7	99.7	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS ...69...

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 [illegible] STATION | STATION NAME | 68-70, 74-79 YEARS | [illegible] MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	0
NO CEILING		33.8	34.4	34.6	35.0	35.0	35.4	35.4	35.4	35.4	35.4	35.4	35.5	35.5	35.5	35.5
≥ 20000		41.8	43.1	43.1	43.2	43.2	43.6	43.6	43.6	43.6	43.6	43.6	43.8	43.8	43.9	43.9
≥ 18000		44.2	45.5	45.5	45.8	45.8	46.2	46.2	46.2	46.2	46.2	46.2	46.4	46.4	46.4	46.4
≥ 16000		44.5	45.8	45.8	46.1	46.1	46.5	46.5	46.5	46.5	46.5	46.5	46.7	46.7	46.7	46.7
≥ 14000		45.4	47.8	47.8	48.1	48.1	48.6	48.6	48.6	48.6	48.6	48.6	48.7	48.7	48.7	48.7
≥ 12000		47.8	49.4	49.4	49.9	49.9	50.3	50.3	50.3	50.3	50.3	50.3	50.4	50.4	50.4	50.4
≥ 10000		51.6	53.3	53.3	53.8	53.8	54.2	54.2	54.2	54.2	54.2	54.2	54.3	54.3	54.3	54.3
≥ 9000		51.6	53.3	53.3	53.8	53.8	54.2	54.2	54.2	54.2	54.2	54.2	54.3	54.3	54.3	54.3
≥ 8000		55.1	56.9	56.9	57.4	57.4	57.8	57.8	57.8	57.8	57.8	57.8	57.9	57.9	57.9	57.9
≥ 7000		55.4	57.8	57.8	58.2	58.2	58.7	58.7	58.7	58.7	58.7	58.7	58.8	58.8	58.8	58.8
≥ 6000		56.1	57.9	57.9	58.4	58.4	59.8	58.8	58.8	58.8	58.8	58.8	59.0	59.0	59.0	59.0
≥ 5000		56.8	59.0	59.0	59.4	59.4	59.8	59.8	59.8	59.8	59.8	59.8	60.0	60.0	60.0	60.0
≥ 4500		56.8	59.0	59.0	59.4	59.4	59.8	59.8	59.8	59.8	59.8	59.8	60.0	60.0	60.0	60.0
≥ 4000		61.3	63.6	63.6	64.0	64.0	64.5	64.5	64.5	64.5	64.5	64.5	64.6	64.6	64.6	64.6
≥ 3500		63.4	66.2	66.2	66.9	66.9	67.3	67.3	67.3	67.3	67.3	67.3	67.5	67.5	67.5	67.5
≥ 3000		76.0	78.8	79.9	81.4	81.4	81.8	81.8	81.8	81.8	81.8	81.9	82.1	82.1	82.1	82.1
≥ 2500		82.1	87.1	87.4	90.2	90.3	90.8	90.8	90.8	90.8	90.8	90.9	91.2	91.2	91.2	91.2
≥ 2000		84.1	89.5	90.3	94.1	94.4	94.9	94.9	94.9	94.9	94.9	95.1	95.2	95.2	95.2	95.2
≥ 1800		84.1	89.6	90.6	94.5	94.8	95.4	95.5	95.5	95.5	95.5	95.7	95.8	95.8	95.8	95.8
≥ 1500		84.7	90.3	91.3	95.7	96.0	96.5	96.7	96.7	96.7	96.7	96.8	97.0	97.0	97.0	97.0
≥ 1200		85.3	91.0	92.1	96.5	97.1	97.8	98.0	98.0	98.3	98.3	98.4	98.6	98.6	98.6	98.6
≥ 1000		85.4	91.2	92.2	96.7	97.3	98.0	98.1	98.1	98.4	98.4	98.6	98.7	98.7	98.7	98.7
≥ 900		85.4	91.2	92.2	97.0	97.5	98.3	98.4	98.4	98.7	98.7	98.8	99.0	99.0	99.0	99.0
≥ 800		85.5	91.3	92.3	97.3	98.0	98.7	98.8	98.8	99.1	99.1	99.3	99.4	99.4	99.4	99.4
≥ 700		85.5	91.3	92.3	97.3	98.0	98.7	98.8	98.8	99.3	99.3	99.4	99.6	99.6	99.6	99.6
≥ 600		85.5	91.3	92.3	97.3	98.1	98.7	98.8	99.0	99.4	99.4	99.6	99.7	99.7	99.7	99.7
≥ 500		85.5	91.3	92.3	97.3	98.1	98.7	98.8	99.0	99.4	99.4	99.6	99.7	99.7	99.7	99.7
≥ 400		85.5	91.3	92.3	97.3	98.1	98.7	98.8	99.0	99.4	99.4	99.6	99.7	99.7	99.7	99.7
≥ 300		85.5	91.3	92.3	97.3	98.0	98.7	98.8	99.0	99.4	99.4	99.6	99.7	99.7	99.7	99.7
≥ 200		85.5	91.3	92.3	97.3	98.0	98.7	98.8	99.0	99.4	99.4	99.6	99.7	99.7	99.7	99.7
≥ 100		85.5	91.3	92.3	97.3	98.0	98.7	98.8	99.0	99.4	99.4	99.6	99.7	99.7	99.7	99.7
≥ 0		85.7	91.5	92.5	97.4	98.1	98.8	99.0	99.1	99.6	99.6	99.7	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 692

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

CLIMATOLOGY BRANCH
ETAC
WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | FAEGU AB MO (STATION NAME) | 68-70,74-79 (YEARS) | ALL (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1-24 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		41.1	41.8	42.0	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3
≥ 20000		44.7	45.5	45.5	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1	47.1
≥ 18000		46.9	46.9	48.1	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9
≥ 16000		46.9	48.7	48.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9
≥ 14000		47.9	49.0	49.2	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.8	50.8
≥ 12000		50.0	51.1	51.1	52.9	52.9	52.9	52.9	52.9	52.9	52.9	52.9	52.9	52.9	52.9	52.9
≥ 10000		52.8	54.6	54.6	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4
≥ 9000		52.8	54.6	54.6	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4	56.4
≥ 8000		55.7	58.2	59.2	60.1	60.1	60.1	60.1	60.1	60.1	60.1	60.1	60.1	60.1	60.1	60.1
≥ 7000		55.7	59.5	59.5	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3	61.3
≥ 6000		57.4	60.2	60.2	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0	62.0
≥ 5000		58.4	61.5	61.5	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3
≥ 4500		58.4	61.5	61.5	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3	63.3
≥ 4000		61.2	64.4	64.5	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3	66.3
≥ 3500		62.7	65.9	66.1	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 3000		78.0	79.6	80.2	84.5	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6	84.6
≥ 2500		80.3	85.1	86.0	90.9	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2	91.2
≥ 2000		81.6	87.6	88.7	95.0	95.4	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7	95.7
≥ 1800		81.8	88.1	89.1	95.4	95.8	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1	96.1
≥ 1500		82.0	88.4	89.9	96.5	96.9	97.2	97.2	97.2	97.2	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1200		82.3	88.8	90.4	97.1	97.6	97.9	98.0	98.0	98.0	98.2	98.2	98.2	98.2	98.2	98.2
≥ 1000		82.4	89.0	90.5	97.5	98.0	98.3	98.5	98.5	98.5	98.5	98.6	98.6	98.6	98.6	98.6
≥ 900		82.4	89.1	90.5	97.8	98.3	98.6	98.7	98.7	98.7	98.9	98.9	98.9	98.9	98.9	98.9
≥ 800		82.4	89.1	90.5	98.0	98.6	99.0	99.3	99.3	99.3	99.4	99.4	99.4	99.4	99.4	99.4
≥ 700		82.7	89.2	90.8	98.3	98.9	99.3	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 600		82.7	89.2	90.8	98.3	98.9	99.3	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		82.7	89.2	90.8	98.3	98.9	99.3	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		82.7	89.2	90.8	98.3	98.9	99.3	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		82.7	89.2	90.8	98.3	98.9	99.3	99.7	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		82.7	89.2	90.8	98.5	99.0	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		82.7	89.2	90.8	98.5	99.0	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		82.7	89.2	90.8	98.5	99.0	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 716

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...EL CLIMATOLOGY BRANCH
...C
...AT-... SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | 1BEGU AB KO STATION NAME | 68-70, 74-79 YEARS | AUG MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL HOURS LST

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		33.6	35.8	36.1	38.2	38.5	39.2	39.4	39.4	39.4	39.4	39.4	39.5	39.5	39.5	39.6
≥ 20000		38.3	40.7	41.0	43.2	43.5	44.3	44.4	44.4	44.4	44.4	44.5	44.5	44.5	44.6	44.6
≥ 18000		40.5	43.1	43.4	45.9	46.2	46.9	47.2	47.2	47.2	47.2	47.2	47.3	47.3	47.3	47.3
≥ 16000		40.3	43.3	43.7	46.2	46.5	47.2	47.4	47.4	47.5	47.5	47.5	47.6	47.6	47.6	47.6
≥ 14000		41.8	44.4	44.8	47.4	47.7	48.5	48.7	48.7	48.8	48.8	48.8	48.9	48.9	48.9	48.9
≥ 12000		43.2	46.1	46.5	49.2	49.6	50.4	50.6	50.6	50.7	50.7	50.7	50.7	50.7	50.8	50.8
≥ 10000		46.1	49.4	49.9	53.0	53.3	54.1	54.4	54.4	54.5	54.5	54.5	54.6	54.6	54.6	54.6
≥ 9000		46.1	49.4	49.9	53.0	53.3	54.1	54.4	54.4	54.5	54.5	54.5	54.6	54.6	54.6	54.6
≥ 8000		49.0	52.5	53.4	56.7	57.1	57.9	58.1	58.1	58.2	58.2	58.2	58.3	58.3	58.3	58.3
≥ 7000		50.0	54.0	54.6	58.0	58.4	59.2	59.4	59.4	59.5	59.5	59.5	59.6	59.6	59.7	59.7
≥ 6000		51.3	54.3	55.0	58.3	58.8	59.6	59.8	59.8	59.9	59.9	59.9	60.0	60.0	60.0	60.1
≥ 5000		51.3	55.5	56.1	59.6	60.0	60.9	61.1	61.1	61.2	61.2	61.2	61.3	61.3	61.3	61.3
≥ 4500		51.5	55.6	56.2	59.7	60.2	61.0	61.2	61.3	61.4	61.4	61.4	61.4	61.4	61.5	61.5
≥ 4000		54.8	59.3	60.0	63.7	64.2	65.0	65.2	65.3	65.3	65.3	65.4	65.4	65.4	65.5	65.5
≥ 3500		57.3	61.9	62.7	66.6	67.0	67.9	68.1	68.1	68.2	68.2	68.2	68.3	68.3	68.3	68.3
≥ 3000		66.2	74.2	75.3	81.3	81.9	81.7	82.0	82.0	82.1	82.1	82.2	82.2	82.2	82.3	82.3
≥ 2500		72.8	80.2	81.5	87.3	88.8	89.0	89.3	89.3	89.4	89.4	89.5	89.5	89.5	89.6	89.6
≥ 2000		74.7	82.9	84.8	91.8	92.7	93.8	94.1	94.2	94.3	94.3	94.3	94.4	94.4	94.4	94.4
≥ 1800		75.0	83.4	85.3	92.5	93.5	94.6	95.0	95.0	95.1	95.1	95.2	95.3	95.3	95.3	95.3
≥ 1500		75.2	84.0	86.1	93.8	94.9	96.1	96.5	96.6	96.8	96.8	96.9	97.0	97.0	97.0	97.0
≥ 1200		75.5	84.5	86.6	94.4	95.6	96.9	97.6	97.6	98.0	98.0	98.0	98.1	98.1	98.2	98.2
≥ 1000		75.6	84.5	86.7	94.7	96.0	97.3	97.9	98.0	98.4	98.5	98.5	98.7	98.7	98.7	98.7
≥ 900		75.6	84.6	86.7	94.8	96.1	97.4	98.0	98.1	98.5	98.6	98.6	98.8	98.8	98.8	98.8
≥ 800		75.6	84.6	86.8	95.0	96.4	97.8	98.4	98.5	98.9	99.0	99.0	99.2	99.2	99.2	99.2
≥ 700		75.6	84.7	86.9	95.1	96.5	97.9	98.5	98.7	99.1	99.1	99.2	99.3	99.3	99.4	99.4
≥ 600		75.6	84.7	86.9	95.1	96.6	98.0	98.6	98.8	99.2	99.3	99.3	99.4	99.4	99.5	99.5
≥ 500		75.7	84.7	86.9	95.1	96.6	98.0	98.7	98.9	99.3	99.4	99.5	99.6	99.6	99.6	99.7
≥ 400		75.7	84.7	86.9	95.2	96.6	98.0	98.8	98.9	99.4	99.5	99.5	99.7	99.7	99.8	99.8
≥ 300		75.7	84.7	86.9	95.2	96.6	98.0	98.8	98.9	99.4	99.5	99.5	99.7	99.7	99.8	99.8
≥ 200		75.7	84.7	86.9	95.2	96.6	98.1	98.8	99.0	99.4	99.5	99.6	99.8	99.8	99.8	99.9
≥ 100		75.7	84.7	86.9	95.2	96.6	98.1	98.8	99.0	99.5	99.6	99.6	99.8	99.8	99.9	99.9
≥ 0		75.7	84.8	86.9	95.2	96.7	98.2	98.9	99.1	99.5	99.6	99.7	99.9	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 5636

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] / TAEGU AB KO / 68-73,74-79 / SEP

STATION / STATION NAME / YEARS / MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0000-0200
HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		43.4	47.3	47.4	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9	47.9
≥ 20000		49.1	53.4	53.5	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4	54.4
≥ 18000		51.4	55.6	55.8	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0
≥ 16000		51.4	55.6	55.8	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0
≥ 14000		52.6	56.9	57.1	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2	58.2
≥ 12000		52.9	57.3	57.5	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7	58.7
≥ 10000		60.5	65.4	65.5	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 9000		61.5	65.4	65.5	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 8000		64.6	69.5	69.7	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9	70.9
≥ 7000		66.8	71.8	72.0	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2
≥ 6000		66.9	72.0	72.1	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 5000		67.4	72.4	72.6	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 4500		67.5	72.6	72.7	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9
≥ 4000		69.7	74.7	74.8	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1	76.1
≥ 3500		71.5	76.5	76.7	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9	77.9
≥ 3000		82.2	88.3	88.3	89.6	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
≥ 2500		83.2	89.6	91.1	93.0	93.1	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3	93.3
≥ 2000		84.3	90.9	91.3	94.7	95.1	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 1800		84.6	91.3	91.8	95.4	96.0	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3	96.3
≥ 1500		84.6	91.3	92.5	96.5	97.1	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4	97.4
≥ 1200		84.6	91.3	92.7	96.8	97.4	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7
≥ 1000		84.6	91.3	92.7	96.8	97.4	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 900		84.6	91.3	92.7	96.8	97.4	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0	98.0
≥ 800		84.6	91.3	92.8	97.0	97.6	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 700		84.6	91.3	92.8	97.0	97.6	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 600		84.6	91.3	93.0	97.1	97.7	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6	98.6
≥ 500		84.6	91.3	93.0	97.3	97.9	99.2	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		84.6	91.3	93.0	97.3	97.9	99.2	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		84.6	91.3	93.0	97.3	97.9	99.2	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		84.6	91.3	93.0	97.3	97.9	99.2	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		84.6	91.3	93.0	97.3	97.9	99.2	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		84.6	91.3	93.0	97.3	97.9	99.2	99.5	99.5	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 656

USAF ETAC FORM NO. 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] 1 [illegible] STATION | [illegible] STATION NAME | 68-[illegible],74-79 YEARS | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		34.1	39.7	39.3	45.6	45.6	46.5	46.5	46.5	46.6	46.6	46.6	46.6	46.6	46.6	46.5
≥ 20000		37.1	42.3	43.2	51.1	50.1	51.0	51.0	51.0	51.1	51.1	51.1	51.1	51.1	51.1	51.1
≥ 18000		41.5	46.3	46.8	54.1	54.1	55.0	55.0	55.0	55.1	55.1	55.1	55.1	55.1	55.1	55.1
≥ 16000		41.5	45.9	46.8	54.1	54.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1	55.1
≥ 14000		41.8	46.2	47.1	54.4	54.4	55.3	55.3	55.3	55.4	55.4	55.4	55.4	55.4	55.4	55.4
≥ 12000		42.3	46.4	49.3	56.9	56.9	57.8	57.8	57.8	58.	58.	58.	58.	58.	58.	58.
≥ 10000		47.1	53.2	54.1	62.1	62.1	63.0	63.0	63.0	63.2	63.2	63.2	63.2	63.2	63.2	63.
≥ 9000		47.1	53.2	54.1	62.1	62.1	63.0	63.0	63.0	63.2	63.2	63.2	63.2	63.2	63.2	63.
≥ 8000		50.1	56.4	57.7	66.2	66.2	67.1	67.1	67.1	67.2	67.2	67.2	67.2	67.2	67.2	67.2
≥ 7000		52.5	59.5	60.4	68.9	68.9	69.7	69.7	69.7	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 6000		52.5	59.5	60.4	68.9	68.9	69.7	69.7	69.7	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 5000		53.4	60.4	61.3	69.7	69.7	70.6	70.6	70.6	70.8	70.8	70.8	70.8	70.6	70.8	70.6
≥ 4500		53.4	60.4	61.3	69.7	69.7	70.6	70.6	70.6	70.8	70.8	70.8	70.8	70.8	70.8	70.6
≥ 4000		56.1	62.3	63.5	72.1	72.1	73.0	73.0	73.0	73.3	73.3	73.3	73.3	73.3	73.3	73.3
≥ 3500		56.0	63.2	64.4	73.3	73.3	74.2	74.2	74.2	74.5	74.5	74.5	74.5	74.5	74.5	74.5
≥ 3000		65.6	75.3	76.8	86.7	87.2	88.1	88.1	88.1	88.4	88.4	88.4	88.4	88.4	88.4	88.4
≥ 2500		66.6	77.2	78.7	89.6	90.8	91.7	91.7	91.7	92.0	92.0	92.0	92.0	92.0	92.0	92.
≥ 2000		67.1	78.5	80.9	92.3	93.6	94.6	94.6	94.6	94.9	94.9	94.9	94.9	94.9	94.9	94.9
≥ 1800		68.4	79.6	81.2	92.7	94.0	95.1	95.1	95.1	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 1500		68.9	80.2	82.3	94.2	95.5	96.6	96.6	96.6	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 1200		68.9	80.2	82.3	94.3	95.7	96.7	96.7	96.7	97.0	97.0	97.0	97.0	97.	97.	97.
≥ 1000		69.0	80.3	82.4	94.5	95.8	96.9	96.9	96.9	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 900		69.0	80.5	82.6	94.6	96.0	97.0	97.0	97.0	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 800		69.0	80.5	82.6	94.8	96.3	97.5	97.5	97.5	98.2	98.2	98.2	98.2	98.2	98.2	98.2
≥ 700		69.1	80.5	82.6	94.8	96.3	97.5	97.6	97.6	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 600		69.1	80.5	82.9	95.2	96.7	97.9	98.4	98.4	99.1	99.1	99.1	99.1	99.1	99.1	99.1
≥ 500		69.2	80.6	83.0	95.4	96.9	98.2	98.7	98.7	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 400		69.2	80.6	83.0	95.4	96.9	98.2	98.7	98.7	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 300		69.2	80.6	83.0	95.4	96.9	98.2	98.7	98.7	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 200		69.2	80.6	83.0	95.5	97.0	98.4	98.8	98.8	99.6	99.6	99.6	99.6	99.6	99.6	99.7
≥ 100		69.2	80.6	83.0	95.5	97.0	98.4	98.8	98.8	99.6	99.6	99.6	99.6	99.6	99.5	100.0
≥ 0		69.2	80.6	83.0	95.5	97.0	98.4	98.8	98.8	99.6	99.6	99.6	99.6	99.6	99.6	100.0

TOTAL NUMBER OF OBSERVATIONS 671

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | TAEGU AB KO STATION NAME | 68-73,74-79 YEARS | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

06-08 HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥⅛	≥0	
NO CEILING		14.5	17.7	18.1	24.4	25.8	28.4	29.0	29.3	29.9	30.7	30.8	31.3	31.3	31.9	32.2
≥ 20000		17.8	21.5	22.1	29.6	30.6	33.4	34.9	35.2	36.1	37.1	37.2	37.8	37.6	38.2	38.7
≥ 18000		21.4	24.5	25.1	33.5	34.3	37.6	39.1	39.4	40.3	41.2	41.4	42.3	42.3	42.9	43.4
≥ 16000		21.5	25.1	25.7	34.1	35.0	38.4	39.9	40.2	41.1	42.0	42.1	43.1	43.1	43.7	44.2
≥ 14000		22.2	26.3	26.9	36.3	37.3	41.6	42.1	42.4	43.4	44.3	44.4	45.3	45.3	45.9	46.4
≥ 12000		23.7	27.9	28.5	38.4	39.4	42.7	44.4	44.7	45.6	46.5	46.7	47.6	47.6	48.2	48.6
≥ 10000		26.3	31.3	32.0	42.3	43.4	46.8	48.9	49.2	50.3	51.2	51.4	52.3	52.3	52.9	53.3
≥ 9000		26.3	31.3	32.0	42.3	43.4	46.8	48.9	49.2	50.3	51.2	51.4	52.3	52.3	52.9	53.3
≥ 8000		29.2	34.6	35.3	47.3	48.5	52.1	54.4	54.7	55.7	56.6	56.8	57.7	57.7	58.3	58.8
≥ 7000		30.5	36.0	36.9	49.1	50.3	54.1	56.6	56.9	58.0	58.9	59.1	60.2	60.0	60.6	61.1
≥ 6000		31.3	36.9	37.8	50.2	51.5	55.3	57.9	58.2	59.2	60.1	60.3	61.2	61.2	61.8	62.3
≥ 5000		31.9	37.5	38.4	50.8	52.1	55.9	58.5	58.8	59.8	60.7	60.9	61.8	61.8	62.5	63.0
≥ 4500		32.5	38.1	39.0	51.5	52.9	56.6	59.2	59.5	60.6	61.5	61.6	62.5	62.5	63.3	63.7
≥ 4000		34.7	40.3	41.2	54.1	55.4	59.2	61.8	62.1	63.1	64.0	64.2	65.1	65.1	65.9	66.3
≥ 3500		35.5	41.4	42.4	55.4	56.8	60.6	63.1	63.4	64.5	65.4	65.6	66.5	66.5	67.2	67.7
≥ 3000		42.1	49.5	50.9	66.0	67.8	72.1	74.6	74.9	76.0	76.9	77.0	77.9	77.9	78.7	79.2
≥ 2500		44.9	52.4	54.1	70.7	72.7	76.9	79.5	79.8	81.0	81.9	82.0	82.9	82.9	83.7	84.1
≥ 2000		46.7	55.1	56.9	74.5	76.9	81.6	84.4	84.9	86.3	87.2	87.3	88.2	88.2	89.0	89.4
≥ 1800		47.3	55.7	57.6	75.4	77.8	82.5	85.3	85.8	87.2	88.1	88.2	89.1	89.1	89.9	90.3
≥ 1500		47.4	55.9	58.0	76.1	78.7	83.4	86.4	87.0	88.4	89.4	89.6	90.5	90.5	91.2	91.7
≥ 1200		47.6	56.0	58.2	76.4	79.0	83.7	87.3	88.4	89.9	90.9	91.1	92.0	92.0	92.7	93.2
≥ 1000		47.6	56.0	58.2	76.4	79.0	83.7	87.8	88.8	90.5	91.5	91.7	92.7	92.7	93.7	94.3
≥ 900		47.6	56.0	58.2	76.4	79.0	83.7	87.8	88.8	90.5	91.5	91.7	92.7	92.7	93.7	94.3
≥ 800		47.6	56.3	58.2	76.4	79.2	84.0	88.1	89.1	90.8	91.8	92.0	93.1	93.1	94.0	94.6
≥ 700		47.6	56.0	58.2	76.4	79.3	84.1	88.4	89.4	91.5	92.7	92.9	94.1	94.1	95.0	95.6
≥ 600		47.6	56.3	58.2	76.4	79.3	84.3	88.5	89.6	91.7	92.9	93.1	94.4	94.4	95.3	95.9
≥ 500		47.6	56.0	58.2	76.4	79.6	84.7	89.1	90.2	92.6	93.8	94.0	95.6	95.6	96.5	97.1
≥ 400		47.6	56.0	58.2	76.4	79.6	84.7	89.1	90.2	92.6	93.8	94.0	95.8	95.8	96.3	97.0
≥ 300		47.7	56.2	58.3	76.6	79.8	84.9	89.3	90.3	92.7	94.0	94.1	95.9	95.9	97.0	98.3
≥ 200		47.7	56.2	58.3	76.6	79.8	84.9	89.3	90.3	92.7	94.0	94.1	95.9	95.9	97.0	98.6
≥ 100		47.7	56.2	58.3	76.6	79.8	84.9	89.3	90.3	92.7	94.0	94.1	95.9	95.9	97.0	99.4
≥ 0		47.7	56.2	58.3	76.6	79.9	85.0	89.4	90.5	92.9	94.1	94.3	96.1	96.1	97.1	100.0

TOTAL NUMBER OF OBSERVATIONS 862

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TIC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1. STATION | FALCON AS NV STATION NAME | 66-79,74-79 YEARS | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0900-1100 HOURS (LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		19.4	22.0	22.6	27.6	29.1	29.9	30.7	30.7	30.8	31.1	31.1	31.2	31.2	31.2	31.4
≥ 20000		26.3	30.9	31.8	38.0	39.7	40.7	41.8	41.9	42.0	42.3	42.3	42.5	42.5	42.5	42.6
≥ 18000		29.5	34.6	35.5	42.5	44.4	45.4	46.4	46.6	46.7	47.0	47.0	47.2	47.2	47.2	47.3
≥ 16000		30.1	35.3	36.2	43.8	46.3	47.0	48.0	48.2	48.3	48.6	48.6	48.8	48.8	48.8	48.9
≥ 14000		32.4	37.7	38.5	46.1	48.3	49.3	50.4	50.6	50.7	50.9	50.9	51.1	51.1	51.1	51.2
≥ 12000		33.7	39.4	40.7	48.8	51.1	52.1	53.3	53.4	53.6	53.9	53.9	54.0	54.0	54.0	54.0
≥ 10000		35.1	42.5	43.8	53.0	55.3	57.2	58.4	58.7	58.8	59.1	59.1	59.3	59.3	59.3	59.4
≥ 9000		36.1	42.5	43.8	53.0	55.3	57.2	58.4	58.7	58.8	59.1	59.1	59.3	59.3	59.3	59.4
≥ 8000		38.2	45.0	46.3	55.6	58.0	60.0	61.5	61.8	61.9	62.2	62.2	62.3	62.3	62.3	62.5
≥ 7000		39.0	46.6	47.9	57.4	59.7	61.8	63.2	63.5	63.6	63.9	63.9	64.1	64.1	64.1	64.2
≥ 6000		40.1	47.2	48.5	58.1	60.4	62.5	63.9	64.2	64.4	64.7	64.7	64.8	64.8	64.8	65.0
≥ 5000		41.3	49.6	49.9	59.6	61.9	63.9	65.5	65.8	66.0	66.3	66.3	66.4	66.4	66.4	66.6
≥ 4500		41.3	48.6	49.9	59.6	61.9	63.9	65.5	65.8	66.0	66.3	66.3	66.4	66.4	66.4	66.6
≥ 4000		43.6	51.5	52.8	62.8	65.1	67.2	68.8	69.2	69.3	69.6	69.6	69.8	69.8	69.8	69.9
≥ 3500		48.1	53.1	54.5	64.4	66.7	68.8	70.4	70.9	71.1	71.4	71.4	71.5	71.5	71.5	71.7
≥ 3000		49.8	56.4	60.1	71.5	73.9	76.2	77.8	78.4	78.7	79.0	79.0	79.1	79.1	79.1	79.4
≥ 2500		53.9	63.9	64.8	76.5	79.0	81.3	82.9	83.5	83.8	84.1	84.1	84.2	84.2	84.2	84.5
≥ 2000		57.8	67.3	69.6	81.9	84.7	87.2	89.1	89.6	89.9	90.2	90.2	90.4	90.4	90.4	90.7
≥ 1800		58.2	67.4	69.9	82.3	85.1	87.6	89.6	90.2	90.5	90.8	90.8	90.9	90.9	90.9	91.2
≥ 1500		58.8	68.6	71.2	83.9	87.0	89.6	92.0	92.6	92.8	93.1	93.1	93.3	93.3	93.3	93.6
≥ 1200		59.0	68.9	71.7	84.7	87.9	90.8	93.4	94.5	94.7	95.0	95.0	95.2	95.2	95.2	95.5
≥ 1000		59.0	68.9	71.8	85.1	88.3	91.4	94.0	95.0	95.6	95.9	95.9	96.1	96.1	96.1	96.4
≥ 900		59.0	68.9	72.0	85.3	88.5	91.5	94.2	95.2	95.8	96.1	96.1	96.2	96.2	96.2	96.5
≥ 800		59.0	68.9	72.0	85.3	88.5	91.7	94.3	95.8	96.4	96.6	96.6	96.8	96.8	96.8	97.1
≥ 700		59.0	68.9	72.0	85.3	88.5	92.0	94.9	96.5	97.1	97.4	97.4	97.5	97.5	97.5	97.8
≥ 600		59.0	68.9	72.0	85.3	88.5	92.3	95.0	96.6	97.4	97.7	97.7	97.8	97.8	97.8	98.1
≥ 500		59.0	68.9	72.0	85.3	88.5	92.1	95.2	97.1	98.0	98.2	98.2	98.5	98.5	98.5	98.8
≥ 400		59.0	68.9	72.0	85.3	88.5	92.1	95.2	97.1	98.0	98.4	98.4	98.7	98.7	98.8	99.3
≥ 300		59.0	68.9	72.0	85.3	88.5	92.1	95.2	97.1	98.0	98.4	98.4	98.8	98.8	99.0	99.6
≥ 200		59.1	69.2	72.3	85.5	88.8	92.4	95.5	97.4	98.2	98.7	98.7	99.1	99.1	99.3	99.9
≥ 100		59.1	69.2	72.3	85.5	88.8	92.4	95.5	97.4	98.2	98.7	98.7	99.1	99.1	99.3	99.9
≥ 0		59.1	69.2	72.3	85.5	88.9	92.6	95.6	97.5	98.4	98.8	98.8	99.3	99.3	99.4	100.0

TOTAL NUMBER OF OBSERVATIONS 685

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...FAL CLIMATOLOGY BRANCH
...DFETAC
...WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1... (STATION) | IAEGO AB KS (STATION NAME) | 68-7..,74-79 (YEARS) | SEP (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

12..-14.. (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		31.7	32.6	32.9	33.9	34.1	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5
≥ 20000		41.2	42.9	43.3	44.8	44.9	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4	45.4
≥ 18000		44.8	46.9	47.3	49..	49.1	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6	49.6
≥ 16000		43.2	47.6	48..	49.7	49.9	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3
≥ 14000		47.8	5..3	50.7	52.4	52.5	53..	53..	53..	53.0	53.0	53.0	53.0	53.0	53.0	53.0
≥ 12000		52.2	54..	55.2	57.0	57.1	57.6	57.6	57.6	57.6	57.6	57.6	57.6	57.6	57.6	57.6
≥ 10000		54.9	57.7	58.3	60.1	60.3	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 9000		54.9	57.7	58.3	60.1	60.3	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7	60.7
≥ 8000		57.9	60.9	61.5	63.4	63.8	64.3	64.3	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 7000		59.1	62.2	62.8	64.7	65.2	65.6	65.6	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 6000		59.8	62.9	63.5	65.5	66.1	66.5	66.5	66.6	66.8	66.8	66.8	66.8	66.8	66.8	66.8
≥ 5000		6..4	63.7	64.3	66.2	66.8	67.3	67.3	67.6	67.6	67.6	67.6	67.6	67.6	67.6	67.6
≥ 4500		61.2	64.4	65.0	67.1	67.7	68.2	68.2	68.5	68.5	68.5	68.5	68.5	68.5	68.5	68.5
≥ 4000		66.5	7..1	70.7	72.9	73.5	74.0	74.0	74.3	74.3	74.3	74.3	74.3	74.3	74.3	74.3
≥ 3500		73.2	73.8	74.4	76.6	77.2	77.7	77.7	78..	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 3000		76.3	8..4	81.1	83.6	84.2	84.7	84.7	85..	85.0	85.0	85.0	85.0	85.0	85.0	85.0
≥ 2500		80.1	85.1	86.2	88.7	89.3	89.7	89.7	90..	90.0	90.0	90.0	90.0	90.0	90.0	90.0
≥ 2000		82.2	88.5	90.0	93.5	94.3	95.1	95.1	95.4	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 1800		83.8	89.3	90.8	94.3	95.4	96.1	96.1	96.4	96.4	96.4	96.4	96.4	96.4	96.4	96.4
≥ 1500		84.4	89.9	91.4	95.4	96.6	97.5	97.5	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1200		84.4	89.9	91.4	95.8	97.3	98.4	98.4	98.7	98.7	98.7	98.7	98.7	98.7	98.7	98.7
≥ 1000		84.4	89.9	91.4	95.8	97.5	98.5	98.5	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 900		84.4	89.9	91.4	95.8	97.5	98.5	98.5	98.8	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800		84.4	90.0	91.5	96.1	97.8	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 700		84.4	90.0	91.5	96.1	97.8	99.0	99.0	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 600		84.4	90.0	91.7	96.4	98.2	99.4	99.4	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		84.4	90.0	91.7	96.4	98.2	99.4	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		84.4	9..0	91.7	96.4	98.2	99.4	99.6	99.9	100.0	100.0	100.0	10..0	100.0	100.0	100.0
≥ 300		84.4	9..0	91.7	96.4	98.2	99.4	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		84.4	9..0	91.7	96.4	98.2	99.4	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		84.4	9..0	91.7	96.4	98.2	99.4	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		84.4	9..0	91.7	96.4	98.2	99.4	99.6	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 67..

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 — STATION — ...ALOU AB, KS — STATION NAME — 68-70, 74-79 — YEARS — SEP — MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...-17... — HOURS LST

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		33.	33.1	33.1	33.1	33.1	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4
≥ 20000		45.1	45.5	45.5	45.8	45.8	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1
≥ 18000		5 .5	51.(	51.(	51.3	51.3	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5
≥ 16000		5 .8	51.3	51.3	51.5	51.5	51.8	51.8	51.8	51.8	51.8	51.8	51.8	51.8	51.8	51.8
≥ 14000		54.2	54.8	54.8	55.1	55.1	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4	55.4
≥ 12000		56.0	56.6	56.6	56.8	56.8	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1	57.1
≥ 10000		60.8	61.6	61.6	61.9	61.9	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2
≥ 9000		60.8	61.6	61.6	61.9	61.9	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2
≥ 8000		62.7	63.6	63.6	63.9	63.9	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2	64.2
≥ 7000		64.8	65.7	65.7	66.0	66.0	66.3	66.3	66.6	66.6	66.6	66.6	66.6	66.6	66.6	66.6
≥ 6000		64.9	66.0	66.0	66.3	66.3	66.6	66.6	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9
≥ 5000		65.2	66.0	66.0	66.3	66.3	66.6	66.6	66.9	66.9	66.9	66.9	66.9	66.9	66.9	66.9
≥ 4500		67.5	68.8	68.8	69.1	69.1	69.4	69.4	69.7	69.7	69.7	69.7	69.7	69.7	69.7	69.7
≥ 4000		71.1	72.6	72.6	73.6	73.6	73.9	73.9	74.4	74.4	74.4	74.4	74.4	74.4	74.4	74.4
≥ 3500		72.8	74.2	74.2	75.3	75.3	75.6	75.6	76.	76.0	76.2	76.2	76.0	76.0	76.0	76.
≥ 3000		83.7	85.7	85.7	87.3	87.5	87.8	87.8	88.2	88.2	88.2	88.2	88.2	88.2	88.2	88.2
≥ 2500		86.5	89.2	89.2	91.3	91.5	91.8	91.8	92.2	92.2	92.2	92.2	92.2	92.2	92.2	92.2
≥ 2000		88.5	91.5	91.5	93.7	94.0	94.7	94.7	95.1	95.1	95.1	95.1	95.1	95.1	95.1	95.1
≥ 1800		89.1	92.3	92.0	94.4	94.8	95.6	95.7	96.2	96.2	96.2	96.2	96.2	96.2	96.2	96.2
≥ 1500		89.7	92.2	92.5	95.3	95.9	96.9	97.1	97.5	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1200		89.2	92.2	92.6	95.9	96.5	97.5	97.6	98.1	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1000		89.2	92.2	92.6	95.9	96.6	97.8	97.9	98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 900		89.2	92.3	92.6	95.9	96.6	97.8	97.9	98.4	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 800		89.2	92.3	92.8	96.2	96.9	98.1	98.2	98.7	99.1	99.3	99.3	99.3	99.3	99.3	99.3
≥ 700		89.2	92.3	92.8	96.3	97.1	98.2	98.4	98.8	99.3	99.4	99.4	99.4	99.4	99.4	99.4
≥ 600		89.2	92.3	92.8	96.3	97.1	98.4	98.7	99.1	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 500		89.2	92.3	92.8	96.3	97.1	98.4	98.7	99.1	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 400		89.2	92.3	92.8	96.3	97.1	98.4	98.7	99.1	99.6	99.7	99.7	99.7	99.7	99.7	99.7
≥ 300		89.4	92.5	92.9	96.5	97.2	98.5	98.8	99.3	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 200		89.4	92.5	92.9	96.6	97.3	98.7	99.0	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		89.4	92.5	92.9	96.6	97.3	98.7	99.0	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		89.4	92.5	92.9	96.6	97.3	98.7	99.0	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 675

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

STATION	STATION NAME	YEARS	MONTH
[illegible]	TAEGU AB KO	68-70,74-79	SEP

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

HOURS LST: 18.0-2000

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		37.5	37.8	37.8	37.9	37.9	38.0	38.0	38.0	38.0	38.0	38.0	38.0	38.0	38.0	38.0
≥ 20000		46.2	46.5	46.5	47.1	47.1	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.3
≥ 18000		5[illegible].1	5[illegible].4	5[illegible].4	51.[illegible]	51.[illegible]	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 16000		5[illegible].1	5[illegible].4	5[illegible].4	51.[illegible]	51.[illegible]	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 14000		53.4	53.8	53.8	54.4	54.4	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5	54.5
≥ 12000		55.5	56.[illegible]	56.[illegible]	56.6	56.6	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7	56.7
≥ 10000		61.4	61.8	61.8	62.4	62.4	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5
≥ 9000		61.4	61.8	61.8	62.4	62.4	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5	62.5
≥ 8000		63.4	64.[illegible]	64.0	64.6	64.7	65.0	65.0	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]	65.[illegible]
≥ 7000		65.7	66.3	66.3	66.9	67.1	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3
≥ 6000		65.9	66.5	66.5	67.1	67.2	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
≥ 5000		67.2	67.8	67.8	68.4	68.5	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8
≥ 4500		67.2	67.8	67.8	68.4	68.5	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8
≥ 4000		69.7	70.3	70.3	71.0	71.1	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6	71.6
≥ 3500		71.3	71.9	71.9	72.6	72.7	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2	73.2
≥ 3000		82.4	84.5	84.7	85.7	86.2	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.7
≥ 2500		86.3	89.1	89.2	91.3	91.7	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.3
≥ 2000		88.[illegible]	91.3	91.4	94.[illegible]	94.5	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	95.[illegible]
≥ 1800		88.3	91.5	91.7	94.3	94.8	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.2	95.3
≥ 1500		88.5	91.8	92.[illegible]	94.8	95.3	95.8	95.8	95.8	95.8	95.8	95.8	95.9	95.9	95.9	96.1
≥ 1200		88.5	92.1	92.4	95.3	95.9	96.6	96.6	96.6	96.6	96.6	96.6	96.8	96.8	96.8	96.9
≥ 1000		88.5	92.1	92.4	95.3	95.9	96.6	96.8	96.9	97.5	97.5	97.5	97.7	97.7	97.7	97.8
≥ 900		88.5	92.1	92.4	95.3	95.9	96.6	96.8	96.9	97.5	97.5	97.5	97.7	97.7	97.7	97.8
≥ 800		88.5	92.1	92.4	95.3	96.1	96.8	97.1	97.2	98.3	98.3	98.3	98.4	98.4	98.4	98.5
≥ 700		88.5	92.1	92.4	95.3	96.2	96.9	97.2	97.4	98.8	98.8	98.8	99.0	99.0	99.0	99.1
≥ 600		88.5	92.1	92.4	95.5	96.4	97.1	97.4	97.5	99.0	99.0	99.0	99.1	99.1	99.1	99.3
≥ 500		88.5	92.1	92.4	95.5	96.4	97.4	98.0	98.1	99.6	99.7	99.7	99.9	99.9	99.9	1[illegible].[illegible]
≥ 400		88.5	92.1	92.4	95.5	96.4	97.4	98.0	98.1	99.6	99.7	99.7	99.9	99.9	99.9	1[illegible].[illegible]
≥ 300		88.5	92.1	92.4	95.5	96.4	97.4	98.0	98.1	99.6	99.7	99.7	99.9	99.9	99.9	1[illegible].[illegible]
≥ 200		88.5	92.1	92.4	95.5	96.4	97.4	98.0	98.1	99.6	99.7	99.7	99.9	99.9	99.9	1[illegible].[illegible]
≥ 100		88.5	92.1	92.4	95.5	96.4	97.4	98.0	98.1	99.6	99.7	99.7	99.9	99.9	99.9	1[illegible].[illegible]
≥ 0		88.5	92.1	92.4	95.5	96.4	97.4	98.0	98.1	99.6	99.7	99.7	99.9	99.9	99.9	1[illegible].[illegible]

TOTAL NUMBER OF OBSERVATIONS 696

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] ATMOS SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] 1 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		42.6	43.1	43.1	43.2	43.2	43.4	43.4	43.4	43.4	43.4	43.4	43.4	43.4	43.4	43.4
≥ 20000		47.5	47.9	47.9	48.5	48.5	48.6	48.6	48.6	48.6	48.6	48.6	48.6	48.6	48.6	48.6
≥ 18000		50.2	50.7	50.7	51.4	51.4	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5
≥ 16000		50.2	50.7	50.7	51.4	51.4	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5	51.5
≥ 14000		52.0	52.4	52.4	53.1	53.1	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3	53.3
≥ 12000		53.9	54.4	54.4	55.2	55.2	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3	55.3
≥ 10000		60.0	61.0	61.0	61.7	61.9	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2
≥ 9000		60.0	61.0	61.0	61.7	61.9	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2	62.2
≥ 8000		63.5	64.8	64.8	65.5	65.6	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 7000		65.1	66.5	66.5	67.2	67.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 6000		65.1	66.5	66.5	67.2	67.4	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7	67.7
≥ 5000		66.2	67.7	67.7	68.4	68.6	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 4500		66.2	67.7	67.7	68.4	68.6	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 4000		69.4	70.9	70.9	71.6	71.8	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1	72.1
≥ 3500		71.2	72.6	72.6	73.4	73.5	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 3000		83.0	85.6	86.0	87.0	87.2	87.8	87.8	87.8	87.8	87.9	87.9	87.9	87.9	87.9	87.9
≥ 2500		87.6	91.5	91.0	93.3	93.4	94.0	94.0	94.0	94.0	94.2	94.2	94.2	94.2	94.2	94.2
≥ 2000		88.4	91.6	92.1	94.9	95.1	95.6	95.6	95.6	95.6	95.8	95.8	95.8	95.8	95.8	95.8
≥ 1800		88.6	92.1	92.7	95.8	95.9	96.5	96.5	96.5	96.5	96.7	96.7	96.7	96.7	96.7	96.7
≥ 1500		88.8	92.4	93.0	96.2	96.4	96.9	96.9	96.9	96.9	97.1	97.1	97.1	97.1	97.1	97.1
≥ 1200		88.8	92.4	93.0	96.2	96.4	97.1	97.1	97.1	97.1	97.2	97.2	97.2	97.2	97.2	97.2
≥ 1000		88.8	92.4	93.0	96.4	96.5	97.5	97.8	97.8	97.8	98.0	98.0	98.0	98.0	98.0	98.0
≥ 900		88.8	92.4	93.0	96.4	96.5	97.5	97.8	97.8	97.8	98.0	98.0	98.0	98.0	98.0	98.0
≥ 800		88.8	92.4	93.0	96.4	96.7	97.8	98.1	98.1	98.1	98.3	98.3	98.3	98.3	98.3	98.3
≥ 700		88.8	92.4	93.0	96.4	96.7	97.8	98.1	98.1	98.3	98.4	98.4	98.4	98.4	98.4	98.4
≥ 600		88.8	92.4	93.0	96.4	96.7	98.3	98.5	98.5	98.7	98.8	98.8	98.8	98.8	98.8	98.8
≥ 500		88.8	92.4	93.3	96.7	96.9	99.0	99.3	99.3	99.7	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		88.8	92.4	93.3	96.7	96.9	99.1	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		88.8	92.4	93.0	96.7	96.9	99.1	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		88.8	92.4	93.0	96.7	96.9	99.1	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		88.8	92.4	93.0	96.7	96.9	99.1	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		88.8	92.4	93.0	96.7	96.9	99.1	99.4	99.4	99.9	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 667

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | TAFB AB KO STATION NAME | 68-70,74-79 YEARS | SEP MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		31.9	34.3	34.3	36.8	37.1	37.7	37.9	37.9	38.1	38.2	38.2	38.3	38.3	38.3	38.4
≥ 20000		39.3	41.4	41.7	44.8	45.1	45.9	46.2	46.2	46.4	46.5	46.5	46.6	46.6	46.7	46.8
≥ 18000		42.2	45.0	45.3	48.7	49.1	49.9	50.2	50.3	50.4	50.5	50.5	50.7	50.7	50.7	50.8
≥ 16000		42.5	45.3	45.6	49.1	49.5	50.3	50.6	50.6	50.8	50.9	51.0	51.1	51.1	51.2	51.3
≥ 14000		44.5	47.3	47.7	51.3	51.7	52.5	52.8	52.9	53.0	53.1	53.1	53.3	53.3	53.4	53.4
≥ 12000		48.4	49.4	49.8	53.6	54.0	54.8	55.1	55.2	55.3	55.5	55.5	55.6	55.6	55.7	55.9
≥ 10000		50.9	54.3	54.8	58.8	59.3	60.2	60.6	60.7	60.8	61.0	61.0	61.1	61.1	61.2	61.3
≥ 9000		50.9	54.3	54.8	58.8	59.3	60.2	60.6	60.7	60.8	61.0	61.0	61.1	61.1	61.2	61.3
≥ 8000		53.7	57.4	57.9	62.2	62.7	63.7	64.2	64.2	64.4	64.6	64.6	64.7	64.7	64.8	64.9
≥ 7000		55.5	59.3	59.8	64.2	64.7	65.7	66.2	66.4	66.5	66.7	66.7	66.8	66.8	66.9	67.1
≥ 6000		55.9	59.7	60.2	64.6	65.1	66.1	66.6	66.8	67.0	67.1	67.1	67.2	67.2	67.3	67.4
≥ 5000		56.9	60.8	61.3	65.7	66.2	67.2	67.7	67.9	68.1	68.2	68.2	68.4	68.4	68.5	68.6
≥ 4500		57.1	61.1	61.5	66.0	66.5	67.5	68.1	68.2	68.4	68.5	68.5	68.7	68.7	68.8	68.8
≥ 4000		60.0	64.1	64.6	69.3	69.9	70.9	71.4	71.6	71.8	71.9	71.9	72.1	72.1	72.2	72.3
≥ 3500		61.7	65.9	66.4	71.1	71.7	72.7	73.2	73.4	73.6	73.8	73.8	73.9	73.9	74.0	74.1
≥ 3000		73.7	76.0	76.7	82.2	83.0	84.1	84.6	84.8	85.1	85.2	85.2	85.4	85.4	85.5	85.6
≥ 2500		73.7	79.6	80.5	86.8	87.7	88.9	89.4	89.6	89.8	90.0	90.0	90.1	90.1	90.2	90.3
≥ 2000		75.7	82.0	83.0	89.9	91.0	92.4	93.0	93.2	93.5	93.6	93.6	93.8	93.8	93.9	94.1
≥ 1800		76.1	82.4	83.5	90.6	91.8	93.1	93.8	94.0	94.2	94.4	94.4	94.5	94.5	94.6	94.7
≥ 1500		76.4	82.8	84.2	91.6	92.8	94.3	95.0	95.2	95.4	95.6	95.6	95.8	95.8	95.9	96.0
≥ 1200		76.4	82.9	84.3	92.0	93.3	94.8	95.6	96.0	96.2	96.4	96.4	96.6	96.6	96.7	96.9
≥ 1000		76.5	83.0	84.4	92.1	93.4	95.1	96.0	96.4	96.9	97.0	97.1	97.2	97.2	97.3	97.5
≥ 900		76.5	83.0	84.4	92.1	93.4	95.1	96.0	96.4	96.9	97.1	97.1	97.3	97.3	97.4	97.5
≥ 800		76.5	83.0	84.5	92.2	93.6	95.4	96.3	96.7	97.3	97.5	97.5	97.7	97.7	97.8	97.9
≥ 700		76.5	83.0	84.5	92.2	93.7	95.5	96.5	96.9	97.6	97.8	97.9	98.0	98.0	98.1	98.3
≥ 600		76.5	83.0	84.5	92.3	93.8	95.8	96.8	97.3	98.0	98.2	98.2	98.4	98.4	98.6	98.7
≥ 500		76.5	83.0	84.5	92.4	93.9	96.1	97.3	97.7	98.6	98.9	98.9	99.1	99.1	99.2	99.4
≥ 400		76.5	83.0	84.5	92.4	93.9	96.1	97.3	97.8	98.6	98.9	98.9	99.2	99.2	99.3	99.5
≥ 300		76.5	83.1	84.6	92.5	94.0	96.1	97.3	97.8	98.7	98.9	98.9	99.2	99.2	99.4	99.6
≥ 200		76.5	83.1	84.6	92.5	94.1	96.2	97.4	97.9	98.7	99.0	99.0	99.3	99.3	99.5	99.8
≥ 100		76.5	83.1	84.6	92.5	94.1	96.2	97.4	97.9	98.7	99.0	99.0	99.3	99.3	99.5	99.9
≥ 0		76.5	83.1	84.6	92.5	94.1	96.2	97.4	97.9	98.8	99.0	99.1	99.4	99.4	99.5	100.0

TOTAL NUMBER OF OBSERVATIONS 1320

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
FYC
...AT... SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | FAIRBANKS AP AK STATION NAME | 65-69,73-79 YEARS | OCT MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0700-2200 HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥⅛	≥0	
NO CEILING		67.3	65.8	67.2	69.6	65.8	65.8	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1	66.1
≥ 20000		66.3	66.3	66.3	69.3	69.3	69.3	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6	69.6
≥ 18000		67.5	69.4	69.4	72.8	72.8	72.8	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1
≥ 16000		67.5	69.4	69.4	72.8	72.8	72.8	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1	73.1
≥ 14000		69.1	72.1	72.1	73.4	73.4	73.4	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7	73.7
≥ 12000		69.8	72.8	72.8	75.6	75.6	75.6	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9	75.9
≥ 10000		69.8	75.9	75.9	79.2	79.2	79.2	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 9000		69.6	75.9	75.9	79.2	79.2	79.2	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 8000		71.8	78.6	78.6	82.0	82.0	82.0	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4	82.4
≥ 7000		73.9	80.6	80.6	84.1	84.1	84.1	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4	84.4
≥ 6000		74.3	81.1	81.1	84.6	84.6	84.6	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9	84.9
≥ 5000		74.8	81.6	81.6	85.0	85.0	85.0	85.4	85.4	85.4	85.4	85.4	85.4	85.4	85.4	85.4
≥ 4500		74.8	81.6	81.6	85.0	85.0	85.0	85.4	85.4	85.4	85.4	85.4	85.4	85.4	85.4	85.4
≥ 4000		75.9	83.0	83.0	86.6	86.6	86.6	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9	86.9
≥ 3500		77.0	84.6	84.6	88.2	88.2	88.2	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
≥ 3000		93.6	92.1	92.1	96.5	96.5	96.5	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9	96.9
≥ 2500		94.4	93.1	93.1	97.5	97.5	97.5	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 2000		94.4	93.4	93.4	98.1	98.1	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1800		94.4	93.4	93.4	98.1	98.1	98.1	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1500		94.4	93.9	93.9	99.1	99.1	99.1	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 1200		94.4	94.1	94.1	99.2	99.2	99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 1000		94.4	94.1	94.1	99.2	99.2	99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 900		94.4	94.1	94.1	99.2	99.2	99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 800		94.4	94.0	94.0	99.2	99.2	99.2	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5	99.5
≥ 700		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 600		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 500		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 400		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 300		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		94.4	94.0	94.0	99.2	99.2	99.2	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 635

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
...WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | TACOMA AS WA (STATION NAME) | 63-69,73-79 (YEARS) | OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...-...3 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥¼	≥5/16	≥0
NO CEILING		4[illegible]	5[illegible]	5[illegible].1	64.5	65.1	65.7	66.1	66.2	66.7	66.7	66.7	66.7	66.7	66.7	66.7
≥ 20000		4[illegible].7	54.2	54.2	67.6	68.2	69.8	69.1	69.3	69.7	69.7	69.7	69.7	69.7	69.7	69.7
≥ 18000		[illegible].5	54.5	54.5	72.4	73.0	73.6	73.9	74.[illegible]	74.5	74.5	74.5	74.5	74.5	74.5	74.5
≥ 16000		[illegible].5	58.5	58.5	72.4	73.[illegible]	73.6	73.9	74.[illegible]	74.5	74.5	74.5	74.5	74.5	74.5	74.5
≥ 14000		51.3	59.3	59.3	73.1	73.7	74.3	74.7	74.8	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 12000		53.[illegible]	61.3	61.3	75.1	75.7	76.3	76.7	76.8	77.3	77.3	77.3	77.3	77.3	77.3	77.3
≥ 10000		55.2	65.[illegible]	65.[illegible]	79.[illegible]	79.6	8[illegible].2	80.5	80.6	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 9000		56.2	65.3	65.3	79.0	79.6	80.2	80.5	80.6	81.1	81.1	81.1	81.1	81.1	81.1	81.1
≥ 8000		59.7	67.6	67.6	82.2	82.8	83.4	83.7	83.9	84.3	84.3	84.3	84.3	84.3	84.3	84.3
≥ 7000		59.4	69.5	68.5	83.1	83.7	84.3	84.6	84.8	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 6000		60.1	69.1	69.1	83.7	84.3	84.9	85.3	85.4	85.9	85.9	85.9	85.9	85.9	85.9	85.9
≥ 5000		6[illegible].2	69.3	69.3	83.9	84.5	85.1	85.4	85.6	86.0	86.[illegible]	86.0	86.0	86.[illegible]	86.[illegible]	86.[illegible]
≥ 4500		6[illegible].5	69.6	69.6	84.[illegible]	84.8	85.4	85.7	85.[illegible]	86.3	86.[illegible]	86.3	86.3	86.3	86.3	[illegible]
≥ 4000		61.3	7[illegible].4	7[illegible].4	85.4	86.[illegible]	86.6	86.9	87.1	87.6	87.6	87.6	87.6	87.6	87.6	[illegible]
≥ 3500		62.4	71.7	71.7	86.9	87.6	88.2	88.5	88.6	89.1	89.1	89.1	89.1	89.1	89.1	[illegible]
≥ 3000		66.1	76.5	77.[illegible]	93.7	94.3	94.9	95.2	95.4	95.9	95.9	95.9	95.9	95.9	95.9	[illegible]
≥ 2500		67.1	77.6	78.[illegible]	94.8	95.9	96.5	96.8	96.9	97.4	97.4	97.4	97.4	97.4	97.4	[illegible]
≥ 2000		67.1	77.6	78.2	94.9	96.[illegible]	96.6	96.9	97.1	97.5	97.5	97.5	97.5	97.5	97.5	[illegible]
≥ 1800		67.1	77.6	78.2	95.4	96.5	97.1	97.4	97.5	98.[illegible]	98.[illegible]	98.[illegible]	98.[illegible]	98.[illegible]	98.[illegible]	[illegible]
≥ 1500		67.1	77.7	78.3	96.2	97.2	97.8	98.2	98.3	98.8	98.8	98.8	98.8	98.8	98.8	[illegible]
≥ 1200		67.1	77.7	78.3	96.2	97.4	98.5	98.8	98.9	99.4	99.4	99.4	99.4	99.4	99.4	99.4
≥ 1000		67.3	78.0	78.6	96.5	97.7	98.8	99.1	99.2	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 900		67.3	78.0	78.6	96.5	97.7	98.8	99.1	99.2	99.7	99.7	99.7	99.7	99.7	99.7	99.7
≥ 800		67.4	78.2	78.6	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 700		67.4	78.2	78.6	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 600		67.4	78.2	78.6	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 500		67.4	78.2	78.8	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 400		67.4	78.2	78.8	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 300		67.4	78.2	78.8	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 200		67.4	78.2	78.8	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 100		67.4	78.2	78.8	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	99.8
≥ 0		67.4	78.2	78.8	96.6	97.8	98.9	99.2	99.4	99.8	99.8	99.8	99.8	99.8	99.8	100.[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]51

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] AT-[illegible] SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | TABOO AB KO STATION NAME | 68-69, 73-79 YEARS | OCT MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		28.4	30.1	33.2	43.2	44.1	47.3	49.3	49.9	51.3	52.0	52.0	53.0	53.4	54.0	54.0
≥ 20000		29.5	35.3	36.3	47.1	48.0	51.5	54.0	54.6	56.3	57.3	57.3	58.5	58.8	59.4	60.4
≥ 18000		29.8	36.4	37.9	49.1	50.1	53.7	56.2	56.9	58.5	59.4	59.4	60.7	61.2	61.3	63.0
≥ 16000		30.0	37.1	38.1	49.3	50.2	53.8	56.3	57.1	58.7	59.6	59.6	60.8	61.3	61.9	63.2
≥ 14000		31.7	38.1	39.2	51.7	51.6	55.2	57.9	58.8	60.5	61.5	61.5	62.7	63.2	63.8	65.1
≥ 12000		31.2	39.2	40.4	52.3	53.2	56.9	59.6	60.7	62.4	63.7	63.7	64.9	65.4	66.1	67.4
≥ 10000		33.1	41.2	42.6	54.6	55.5	59.3	61.9	63.1	64.7	66.0	66.0	67.2	67.7	68.5	69.7
≥ 9000		33.1	41.2	42.6	54.6	55.5	59.3	61.9	63.0	64.7	66.0	66.0	67.2	67.7	68.5	69.7
≥ 8000		33.6	44.0	45.4	58.2	59.1	62.9	65.5	66.6	66.3	69.6	69.6	70.8	71.3	72.1	73.3
≥ 7000		35.7	44.5	46.0	59.3	60.2	64.0	66.6	67.7	69.4	70.7	70.7	71.9	72.4	73.2	74.4
≥ 6000		36.0	44.9	46.3	59.8	60.7	64.4	67.1	68.2	69.9	71.1	71.1	72.4	72.9	73.6	74.9
≥ 5000		37.0	46.2	47.7	61.5	62.4	66.1	68.8	69.9	71.6	72.9	72.9	74.3	74.7	75.5	76.8
≥ 4500		37.3	46.5	48.0	61.8	62.7	66.5	69.1	70.2	71.9	73.2	73.2	74.6	75.0	75.8	77.1
≥ 4000		37.8	47.3	48.8	62.9	63.8	67.6	70.2	71.3	73.0	74.3	74.3	75.7	76.1	76.9	78.2
≥ 3500		37.9	47.6	49.1	63.3	64.3	68.0	70.7	71.8	73.5	74.7	74.7	76.1	76.6	77.4	78.8
≥ 3000		41.8	52.9	54.8	71.3	72.4	76.4	79.3	80.3	82.1	83.3	83.3	84.7	85.2	86.0	87.3
≥ 2500		43.5	55.4	57.3	74.3	75.7	80.3	83.2	84.2	86.0	87.2	87.2	88.6	89.1	89.9	91.1
≥ 2000		44.5	56.3	58.5	75.7	77.2	82.4	85.2	86.3	88.0	89.2	89.2	90.6	91.1	91.9	93.1
≥ 1800		44.6	56.5	58.7	75.8	77.4	82.7	85.5	86.6	88.5	89.7	89.7	91.1	91.6	92.4	93.6
≥ 1500		44.6	56.5	58.7	76.0	77.7	83.0	85.8	86.9	88.8	90.0	90.0	91.4	91.9	92.7	93.9
≥ 1200		44.6	56.6	58.8	76.1	77.8	83.6	86.4	87.5	89.4	90.6	90.6	92.0	92.5	93.3	94.5
≥ 1000		44.8	56.9	59.1	76.4	78.2	84.1	86.9	88.0	89.9	91.1	91.1	92.5	93.0	93.8	95.0
≥ 900		44.8	56.9	59.1	76.4	78.2	84.1	86.9	88.0	89.9	91.1	91.1	92.5	93.0	93.8	95.0
≥ 800		44.8	56.9	59.1	76.4	78.2	84.1	87.1	88.1	90.0	91.3	91.3	92.7	93.1	94.1	95.3
≥ 700		44.8	56.9	59.1	76.4	78.2	84.1	87.1	88.1	90.0	91.3	91.3	92.7	93.1	94.1	95.3
≥ 600		44.8	56.9	59.1	76.4	78.2	84.1	87.1	88.1	90.0	91.3	91.3	92.7	93.1	94.1	95.3
≥ 500		44.8	57.1	59.3	76.6	78.3	84.2	87.2	88.3	90.2	91.4	91.4	92.8	93.3	94.2	95.5
≥ 400		44.8	57.1	59.3	76.6	78.3	84.2	87.2	88.3	90.2	91.4	91.4	92.8	93.3	94.4	96.3
≥ 300		44.9	57.3	59.4	76.8	78.5	84.4	87.4	88.5	90.3	91.6	91.6	93.0	93.4	94.5	96.6
≥ 200		44.9	57.3	59.4	76.8	78.5	84.4	87.4	88.5	90.3	91.6	91.6	93.0	93.4	94.5	97.3
≥ 100		44.9	57.3	59.4	76.8	78.5	84.4	87.4	88.5	90.3	91.6	91.6	93.0	93.4	94.5	99.4
≥ 0		44.9	57.3	59.4	76.8	78.5	84.4	87.4	88.5	90.3	91.6	91.6	93.1	93.6	94.7	100.

TOTAL NUMBER OF OBSERVATIONS 641

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 | SALDU AB, KS | 66-69,73-79 | OCT
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

0000-2300
HOURS (LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		25.9	31.6	3[illegible].8	42.5	45.0	50.2	53.0	53.9	55.1	55.3	55.5	55.5	55.5	55.6	55.9
≥ 20000		27.6	34.3	36.4	46.4	49.2	54.7	57.8	58.7	60.3	60.6	60.7	60.7	60.7	60.9	61.2
≥ 18000		28.4	36.6	38.8	48.9	51.7	57.3	60.9	61.8	63.6	63.9	64.0	64.0	64.0	64.2	64.5
≥ 16000		29.6	38.9	38.9	49.1	51.9	57.5	61.1	62.0	63.7	64.0	64.2	64.2	64.2	64.3	64.6
≥ 14000		30.2	37.9	40.3	50.2	53.0	58.7	62.3	63.2	65.1	65.4	65.6	65.6	65.6	65.7	66.0
≥ 12000		31.3	39.6	41.7	52.5	55.5	61.2	64.8	65.7	67.6	68.1	68.2	68.2	68.2	68.4	68.7
≥ 10000		33.0	41.4	43.8	54.8	58.1	64.2	67.8	68.7	70.6	71.1	71.2	71.2	71.2	71.3	71.7
≥ 9000		33.0	41.4	43.8	54.8	58.1	64.2	67.8	68.7	70.6	71.1	71.2	71.2	71.2	71.3	71.7
≥ 8000		34.6	43.1	45.5	57.5	60.7	66.8	70.4	71.3	73.2	73.7	73.8	73.8	73.8	74.0	74.3
≥ 7000		35.5	44.2	46.6	59.7	63.1	69.2	72.7	73.7	75.5	76.1	76.2	76.2	76.2	76.3	76.6
≥ 6000		36.1	45.0	47.4	60.7	64.2	70.2	73.8	74.8	76.6	77.1	77.3	77.3	77.3	77.4	77.7
≥ 5000		36.4	46.3	47.7	61.2	64.6	70.7	74.3	75.2	77.1	77.6	77.7	77.7	77.7	77.9	78.2
≥ 4500		36.6	46.6	48.0	61.7	65.1	71.2	74.8	75.7	77.6	78.1	78.2	78.2	78.2	78.3	78.7
≥ 4000		37.1	47.3	50.6	65.0	68.4	74.5	78.0	79.[illegible]	80.8	81.3	81.5	81.5	81.5	81.6	81.9
≥ 3500		40.2	49.5	52.0	66.4	69.8	76.0	79.6	80.5	82.4	82.9	83.[illegible]	83.[illegible]	83.[illegible]	83.2	83.5
≥ 3000		42.9	52.6	55.3	71.5	75.2	81.8	85.4	86.4	88.5	88.9	89.1	89.1	89.1	89.3	89.6
≥ 2500		44.1	54.5	57.5	74.1	78.5	85.7	89.3	90.3	92.4	92.8	93.0	93.0	93.0	93.1	93.5
≥ 2000		44.7	55.3	58.4	75.4	79.8	86.9	90.5	91.6	93.6	94.1	94.2	94.2	94.2	94.4	94.7
≥ 1800		44.7	55.5	58.7	76.0	80.4	87.5	91.3	92.4	94.5	95.0	95.2	95.2	95.2	95.3	95.6
≥ 1500		44.9	55.6	58.9	76.8	81.3	88.8	92.5	93.6	95.8	96.3	96.4	96.4	96.4	96.6	96.9
≥ 1200		44.9	55.8	59.0	76.9	81.5	88.9	92.8	93.9	96.1	96.6	96.7	96.7	96.7	96.9	97.2
≥ 1000		45.0	55.9	59.2	77.6	82.1	89.6	93.5	94.5	96.7	97.2	97.4	97.4	97.4	97.5	97.8
≥ 900		45.0	55.9	59.2	77.6	82.1	89.6	93.5	94.5	96.7	97.2	97.4	97.4	97.4	97.5	97.8
≥ 800		45.0	55.9	59.2	77.6	82.1	89.6	93.6	94.7	97.0	97.5	97.7	97.7	97.7	97.8	98.1
≥ 700		45.0	55.9	59.2	77.6	82.1	89.6	93.8	94.9	97.2	97.7	97.8	98.0	98.0	98.1	98.4
≥ 600		45.0	55.9	59.2	77.6	82.1	89.6	93.8	94.9	97.2	97.8	98.[illegible]	98.1	98.1	98.3	98.6
≥ 500		45.0	55.9	59.2	77.6	82.1	89.6	93.8	95.[illegible]	97.4	98.[illegible]	98.1	98.3	98.3	98.4	98.9
≥ 400		45.0	55.9	59.2	77.6	82.1	89.6	93.8	95.[illegible]	97.4	98.[illegible]	98.1	98.3	98.3	98.4	98.9
≥ 300		45.0	55.9	59.2	77.6	82.1	89.6	93.8	95.[illegible]	97.4	98.[illegible]	98.1	98.3	98.3	98.4	99.1
≥ 200		45.0	55.9	59.2	77.6	82.1	89.6	93.8	95.[illegible]	97.4	98.[illegible]	98.1	98.3	98.3	98.4	99.4
≥ 100		45.0	55.9	59.2	77.6	82.2	89.7	93.9	95.2	97.5	98.1	98.3	98.4	98.4	98.6	99.8
≥ 0		45.0	55.9	59.2	77.6	82.2	89.7	93.9	95.2	97.5	98.1	98.3	98.4	98.4	98.8	100.0

TOTAL NUMBER OF OBSERVATIONS 642

USAF ETAC FORM NO. 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...TAL CLIMATOLOGY BRANCH
...TAC
... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) TAEGU AB KO (STATION NAME) 66-68,73-79 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 (HOURS LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		44.4	47.9	48.0	50.5	51.1	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2
≥ 20000		52.4	56.6	56.9	59.3	60.1	60.2	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3	60.3
≥ 18000		55.1	59.8	60.1	63.1	64.0	64.3	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 16000		55.1	59.8	60.1	63.1	64.0	64.3	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4	64.4
≥ 14000		56.9	61.0	61.9	65.1	66.0	66.3	66.4	66.4	66.4	66.4	66.4	66.4	66.4	66.4	66.4
≥ 12000		58.3	64.1	64.4	67.6	68.5	68.7	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 10000		61.6	66.4	66.7	69.9	70.8	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 9000		61.6	66.4	66.7	69.9	70.8	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2
≥ 8000		62.3	67.7	68.0	71.5	72.4	72.8	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9	72.9
≥ 7000		64.0	69.2	69.5	73.4	74.2	74.7	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
≥ 6000		64.0	69.2	69.5	73.4	74.2	74.7	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8
≥ 5000		65.3	70.2	70.5	74.4	75.3	75.7	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0
≥ 4500		65.4	70.6	70.9	74.8	75.7	76.1	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4
≥ 4000		75.5	75.8	76.1	80.2	81.0	81.5	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8	81.8
≥ 3500		73.4	79.9	79.2	83.2	84.1	84.5	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8	84.8
≥ 3000		76.0	84.4	85.2	90.0	90.9	91.3	91.6	91.6	91.9	91.9	91.9	91.9	91.9	91.9	91.9
≥ 2500		80.0	86.7	87.6	93.2	94.4	94.8	95.1	95.2	95.4	95.4	95.4	95.4	95.4	95.4	95.4
≥ 2000		81.6	87.6	88.9	94.8	95.9	96.4	96.7	96.8	97.0	97.0	97.0	97.0	97.0	97.0	97.0
≥ 1800		81.9	87.8	89.1	95.2	96.5	97.0	97.3	97.4	97.5	97.5	97.5	97.5	97.5	97.5	97.5
≥ 1500		81.2	88.1	89.4	95.5	97.0	97.4	97.7	98.0	98.1	98.1	98.1	98.1	98.1	98.1	98.1
≥ 1200		81.3	88.4	89.7	96.1	97.5	98.1	98.4	98.7	98.8	98.8	98.8	98.8	98.8	98.8	98.8
≥ 1000		81.3	88.4	89.7	96.5	98.0	98.6	98.8	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 900		81.3	88.4	89.7	96.5	98.0	98.6	98.8	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 800		81.3	88.4	89.7	96.8	98.3	98.8	99.1	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		81.3	88.4	89.7	96.8	98.3	98.8	99.1	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 600		81.3	88.4	89.7	96.8	98.3	98.8	99.1	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 500		81.3	88.4	89.7	96.8	98.3	99.1	99.4	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		81.3	88.4	89.7	96.8	98.3	99.1	99.4	99.7	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 300		81.3	88.4	89.7	96.8	98.3	99.1	99.4	99.7	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 200		81.3	88.4	89.7	96.8	98.3	99.1	99.4	99.7	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 100		81.3	88.4	89.7	96.8	98.3	99.1	99.4	99.7	99.9	99.9	99.9	99.9	99.9	100.0	100.0
≥ 0		81.3	88.4	89.7	96.8	98.3	99.1	99.4	99.7	99.9	99.9	99.9	99.9	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 691

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | OCT MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

15 00-1700 HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		51.3	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2	52.2
≥ 20000		59.9	61.	61.3	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.
≥ 18000		64.3	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8	65.8
≥ 16000		64.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 14000		67.1	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3	68.3
≥ 12000		69.7	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1	71.1
≥ 10000		72.4	73.7	73.7	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 9000		72.4	73.7	73.7	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8	73.8
≥ 8000		74.0	75.3	75.3	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.4	75.6	75.6	75.6	75.6
≥ 7000		75.0	76.3	76.3	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.5	76.6	76.6	76.6	76.6
≥ 6000		75.3	76.6	76.6	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.8	76.9	76.9	76.9	76.9
≥ 5000		75.9	77.2	77.2	77.3	77.3	77.5	77.5	77.5	77.5	77.5	77.5	77.6	77.6	77.6	77.6
≥ 4500		76.5	77.8	77.8	77.9	77.9	78.1	78.1	78.1	78.1	78.1	78.1	78.2	78.2	78.2	78.2
≥ 4000		82.9	84.2	84.2	85.2	85.2	85.4	85.4	85.4	85.4	85.4	85.4	85.5	85.5	85.5	85.5
≥ 3500		84.4	86.0	86.0	87.0	87.0	87.1	87.1	87.1	87.1	87.1	87.1	87.3	87.3	87.3	87.3
≥ 3000		89.2	90.8	90.8	92.3	92.4	92.5	92.8	92.8	93.	93.	93.	93.1	93.1	93.1	93.1
≥ 2500		90.5	92.7	92.7	94.4	94.7	94.9	95.2	95.2	95.3	95.3	95.3	95.5	95.5	95.5	95.5
≥ 2000		91.9	93.7	93.9	95.6	96.1	96.3	96.6	96.6	96.8	96.8	96.8	96.9	96.9	96.9	96.9
≥ 1800		91.2	94.	94.2	96.1	96.5	96.8	97.1	97.1	97.2	97.2	97.2	97.4	97.4	97.4	97.4
≥ 1500		91.4	94.2	94.3	96.3	96.8	97.1	97.4	97.7	97.8	97.8	97.8	98.0	98.0	98.0	98.0
≥ 1200		91.4	94.4	94.7	96.8	97.4	97.7	98.	98.2	98.7	98.7	98.7	98.8	98.8	98.8	98.8
≥ 1000		91.5	94.6	94.9	97.1	97.7	98.0	98.2	98.5	99.	99.	99.0	99.1	99.1	99.1	99.1
≥ 900		91.5	94.6	94.9	97.1	97.7	98.0	98.2	98.5	99.	99.	99.0	99.1	99.1	99.1	99.1
≥ 800		91.5	94.6	94.9	97.2	97.8	98.1	98.4	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 700		91.5	94.6	94.9	97.2	97.8	98.1	98.4	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 600		91.5	94.6	94.9	97.2	97.8	98.1	98.4	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 500		91.7	94.7	95.0	97.4	98.1	98.5	98.8	99.1	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 400		91.7	94.7	95.0	97.4	98.1	98.5	98.8	99.1	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 300		91.7	94.7	95.1	97.4	98.1	98.5	98.8	99.1	99.6	99.6	99.6	99.7	99.7	99.7	99.7
≥ 200		91.8	94.9	95.2	97.5	98.2	98.7	99.0	99.3	99.7	99.7	99.7	99.9	99.9	99.9	99.9
≥ 100		91.8	94.9	95.2	97.5	98.2	98.7	99.0	99.3	99.7	99.7	99.7	99.9	99.9	99.9	99.9
≥ 0		91.8	94.9	95.2	97.7	98.4	98.8	99.1	99.4	99.9	99.9	99.9	100.0	100.0	100.0	100.

TOTAL NUMBER OF OBSERVATIONS 684

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) ...ABEDO AB MO (STATION NAME) 65-69,73-79 (YEARS) OCT (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1800-2400 (HOURS LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		5..2	5..2	56.2	5..5	56.5	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56..
≥ 20000		61.3	61.4	61.4	61.7	61.7	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8	61.8
≥ 18000		65.3	65.5	65.5	65.8	65.8	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 16000		65.3	65.5	65.5	65.8	65.8	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9
≥ 14000		67.9	67.6	67.6	67.9	67.9	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1	68.1
≥ 12000		69.2	69.5	69.5	69.8	69.8	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9	69.9
≥ 10000		73.4	73.7	73.7	74.0	74.0	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1
≥ 9000		73.4	73.7	73.7	74.0	74.0	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1
≥ 8000		76.3	76.6	76.6	76.9	76.9	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0	77.0
≥ 7000		77.0	77.6	77.6	77.9	77.9	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0
≥ 6000		77.5	78.0	78.0	78.3	78.3	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5	78.5
≥ 5000		78.3	78.8	78.8	79.0	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2	79.2
≥ 4500		79.3	79.0	79.0	79.3	79.3	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5	79.5
≥ 4000		82.6	82.1	82.1	82.7	82.7	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8	82.8
≥ 3500		91.4	82.9	82.9	83.5	83.5	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7	83.7
≥ 3000		91.7	91.9	91.9	93.2	93.5	93.6	93.6	93.6	93.8	93.8	93.8	93.8	93.8	93.8	93.8
≥ 2500		92.0	92.8	92.8	94.5	94.8	94.9	94.9	94.9	95.1	95.2	95.4	95.4	95.4	95.4	95.4
≥ 2000		93.3	93.5	93.5	95.5	95.8	96.1	96.1	96.1	96.2	96.4	96.5	96.5	96.5	96.5	96.5
≥ 1800		93.5	93.6	93.6	95.8	96.1	96.4	96.4	96.4	96.5	96.7	96.8	96.8	96.8	96.8	96.8
≥ 1500		93.5	94.1	94.1	96.4	96.8	97.1	97.3	97.3	97.7	97.8	98.0	98.0	98.0	98.0	98.0
≥ 1200		93.5	94.1	94.1	96.4	97.1	97.4	98.3	98.3	98.7	98.8	99.0	99.0	99.0	99.0	99.0
≥ 1000		93.9	94.5	94.5	96.8	97.5	97.8	98.8	98.8	99.3	99.4	99.6	99.6	99.6	99.6	99.6
≥ 900		93.9	94.5	94.5	96.8	97.5	97.8	98.8	98.8	99.3	99.4	99.6	99.6	99.6	99.6	99.6
≥ 800		93.9	94.5	94.5	96.8	97.7	98.0	99.0	99.0	99.4	99.6	99.7	99.7	99.7	99.7	99.7
≥ 700		90.9	94.5	94.5	96.8	97.7	98.0	99.0	99.0	99.4	99.6	99.7	99.7	99.7	99.7	99.7
≥ 600		93.9	94.5	94.5	96.8	97.7	98.0	99.0	99.0	99.4	99.6	99.7	99.7	99.7	99.7	99.7
≥ 500		93.9	94.5	94.5	96.8	97.7	98.0	99.0	99.0	99.4	99.6	99.7	99.7	99.7	99.7	99.7
≥ 400		93.9	94.5	94.5	96.8	97.7	98.0	99.1	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0
≥ 300		93.9	94.5	94.5	96.8	97.7	98.0	99.1	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0
≥ 200		93.9	94.5	94.5	96.8	97.7	98.0	99.1	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0
≥ 100		93.9	94.5	94.5	96.8	97.7	98.0	99.1	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0
≥ 0		93.9	94.5	94.5	96.8	97.7	98.0	99.1	99.3	99.7	99.9	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 692

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

12	TAEGU AB KO	68-69,73-79	OCT
STATION	STATION NAME	YEARS	MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-2300
HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		58.9	62.[illegible]	62.[illegible]	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9	62.9
≥ 20000		63.2	66.4	66.4	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3	67.3
≥ 18000		66.3	69.5	69.5	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4
≥ 16000		66.3	69.5	69.5	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4
≥ 14000		67.3	70.5	70.5	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4	71.4
≥ 12000		69.9	73.2	73.2	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0	74.0
≥ 10000		74.2	77.7	77.7	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6
≥ 9000		74.2	77.7	77.7	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6	78.6
≥ 8000		76.7	80.4	80.4	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 7000		77.7	81.4	81.4	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3
≥ 6000		78.[illegible]	81.7	81.7	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6	82.6
≥ 5000		78.6	82.3	82.3	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 4500		78.6	82.3	82.3	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1	83.1
≥ 4000		80.5	84.5	84.5	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3	85.3
≥ 3500		81.5	85.9	85.9	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8	86.8
≥ 3000		88.7	93.5	93.7	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6	95.6
≥ 2500		89.4	94.9	95.1	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2	97.2
≥ 2000		89.7	95.5	95.6	98.2	98.2	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4	98.4
≥ 1800		91.[illegible]	95.9	96.0	98.8	98.8	99.[illegible]	99.0	99.[illegible]	99.0	99.0	99.0	99.0	99.0	99.0	99.0
≥ 1500		91.[illegible]	96.[illegible]	96.2	99.1	99.1	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3	99.3
≥ 1200		90.[illegible]	96.2	96.3	99.3	99.3	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 1000		91.0	96.2	96.3	99.3	99.3	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 900		90.0	96.2	96.3	99.3	99.3	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 800		91.0	96.2	96.3	99.3	99.3	99.4	99.4	99.6	99.6	99.6	99.6	99.6	99.6	99.6	99.6
≥ 700		90.[illegible]	96.[illegible]	96.3	99.3	99.3	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 600		9[illegible].0	96.2	96.3	99.3	99.3	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 500		90.[illegible]	96.2	96.3	99.3	99.3	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 400		90.[illegible]	96.2	96.3	99.3	99.3	99.7	99.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
≥ 300		91.0	96.2	96.3	99.4	99.4	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 200		9[illegible].[illegible]	96.2	96.3	99.4	99.4	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 100		90.2	96.2	96.3	99.4	99.4	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
≥ 0		90.[illegible]	96.2	96.3	99.4	99.4	99.9	99.9	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 682

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | OCT MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

ALL HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		45.9	49.8	50.2	54.8	55.4	56.5	57.1	57.3	57.7	57.8	57.8	58.[illegible]	58.[illegible]	58.1	58.[illegible]
≥ 20000		50.3	54.6	55.0	60.[illegible]	60.7	61.8	62.6	62.8	63.3	63.4	63.4	63.6	63.9	63.7	63.9
≥ 18000		53.4	53.[illegible]	56.4	63.6	64.3	65.5	66.3	66.5	67.[illegible]	67.1	67.2	67.3	67.4	67.5	67.7
≥ 16000		53.5	53.[illegible]	56.5	63.7	64.3	65.6	66.4	66.6	67.1	67.2	67.2	67.4	67.4	67.5	67.7
≥ 14000		54.7	59.4	59.9	65.1	65.8	67.0	67.9	68.1	68.6	68.7	68.8	68.9	69.[illegible]	69.1	69.3
≥ 12000		56.6	61.5	62.[illegible]	67.4	68.[illegible]	69.3	70.1	70.4	70.9	71.1	71.1	71.3	71.[illegible]	71.4	71.6
≥ 10000		59.6	64.6	65.1	70.6	71.3	72.6	73.5	73.7	74.2	74.4	74.4	74.6	74.7	74.8	75.[illegible]
≥ 9000		59.6	64.6	65.1	70.6	71.3	72.6	73.5	73.7	74.2	74.4	74.4	74.5	74.7	74.8	75.[illegible]
≥ 8000		61.6	66.9	67.4	73.2	73.9	75.3	76.1	76.4	76.9	77.1	77.1	77.2	77.3	77.4	77.6
≥ 7000		62.6	68.1	68.6	74.6	75.3	76.7	77.5	77.8	78.3	78.5	78.5	78.7	78.7	78.8	79.
≥ 6000		63.0	69.[illegible]	69.[illegible]	75.1	75.8	77.1	78.0	78.2	78.7	78.9	79.9	79.1	79.2	79.3	79.[illegible]
≥ 5000		63.6	69.1	69.6	75.8	76.5	77.8	78.7	79.[illegible]	79.5	79.7	79.7	79.9	79.9	80.[illegible]	80.[illegible]
≥ 4500		63.9	69.4	69.9	76.1	76.8	78.1	79.0	79.3	79.8	80.0	80.0	80.2	80.2	80.3	80.5
≥ 4000		66.5	72.2	72.8	79.3	80.[illegible]	81.4	82.2	82.5	83.[illegible]	83.2	83.2	83.4	83.[illegible]	83.6	83.8
≥ 3500		67.7	73.7	74.2	8 .8	81.5	82.9	83.8	84.	84.5	84.7	84.7	84.9	85.[illegible]	85.1	85.3
≥ 3000		73.9	79.7	80.4	88.2	89.0	90.4	91.4	91.7	92.2	92.4	92.5	92.6	92.7	92.8	93.[illegible]
≥ 2500		74.1	81.3	82.1	90.2	91.2	92.8	93.7	94.[illegible]	94.6	94.8	94.9	95.1	95.1	95.2	95.4
≥ 2000		74.5	81.9	82.9	91.2	92.3	94.0	94.9	95.[illegible]	95.8	96.[illegible]	96.1	96.2	96.3	96.4	96.6
≥ 1800		74.6	82.1	83.1	91.6	92.7	94.4	95.4	95.7	96.3	96.5	96.5	96.7	96.8	96.9	97.1
≥ 1500		74.7	82.4	83.3	92.1	93.3	95.0	96.0	96.4	97.0	97.2	97.3	97.4	97.5	97.6	97.8
≥ 1200		74.7	82.5	83.5	92.3	93.6	95.4	96.5	96.9	97.6	97.8	97.8	98.[illegible]	98.1	98.2	98.4
≥ 1000		74.9	82.7	83.6	92.6	93.9	95.8	96.9	97.2	97.9	98.1	98.2	98.4	98.4	98.5	98.7
≥ 900		74.9	82.7	83.6	92.6	93.9	95.8	96.9	97.2	97.9	98.1	98.2	98.4	98.4	98.5	98.7
≥ 800		74.9	82.7	83.7	92.7	93.9	95.9	97.0	97.4	98.1	98.3	98.3	98.5	98.6	98.7	98.9
≥ 700		74.9	82.7	83.7	92.7	93.9	95.9	97.1	97.5	98.2	98.4	98.4	98.6	98.7	98.8	99.0
≥ 600		74.9	82.7	83.7	92.7	93.9	95.9	97.1	97.5	98.2	98.4	98.5	98.7	98.7	98.9	99.1
≥ 500		74.9	82.7	83.7	92.7	94.0	96.0	97.2	97.6	98.3	98.6	98.6	98.8	98.9	99.[illegible]	99.2
≥ 400		74.9	82.7	83.7	92.7	94.0	96.0	97.2	97.6	98.3	98.6	98.6	98.8	98.9	99.1	99.3
≥ 300		74.9	82.8	83.7	92.7	94.0	96.1	97.3	97.7	98.4	98.6	98.7	98.9	98.9	99.1	99.4
≥ 200		74.9	82.8	83.7	92.8	94.1	96.1	97.3	97.7	98.4	98.6	98.7	98.9	98.9	99.1	99.6
≥ 100		74.9	82.8	83.7	92.8	94.1	96.1	97.3	97.7	98.4	98.7	98.7	98.9	99.[illegible]	99.1	99.9
≥ 0		74.9	82.8	83.7	92.8	94.1	96.1	97.3	97.7	98.4	98.7	98.7	98.9	99.	99.2	100.

TOTAL NUMBER OF OBSERVATIONS 531[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
USAFETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] 12 STATION | TAEGU AB KO STATION NAME | 68-[illegible],73-79 YEARS | NOV MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-[illegible] HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		64.6	66.5	66.5	67.7	67.7	68.0	68.5	68.8	68.6	68.6	66.6	68.8	68.8	68.8	66.8
≥ 20000		67.8	69.8	69.8	71.2	71.2	71.8	72.3	72.3	72.4	72.4	72.4	72.6	72.6	72.6	72.6
≥ 18000		69.8	72.6	72.6	74.1	74.1	74.7	75.2	75.2	75.3	75.3	75.3	75.5	75.5	75.5	75.5
≥ 16000		70.0	72.7	72.7	74.3	74.3	74.9	75.3	75.3	75.5	75.5	75.5	75.7	75.7	75.7	75.7
≥ 14000		70.3	73.0	73.0	74.6	74.6	75.3	75.8	75.8	76.0	76.0	76.0	76.1	76.1	76.1	76.1
≥ 12000		70.4	73.2	73.2	74.7	74.7	75.5	76.0	76.0	76.1	76.1	76.1	76.3	76.3	76.3	76.3
≥ 10000		72.4	75.3	75.3	76.9	77.1	77.8	78.3	78.3	78.4	78.4	78.4	78.6	78.6	78.6	78.6
≥ 9000		72.4	75.3	75.3	76.9	77.0	77.8	78.3	78.3	78.4	78.4	78.4	78.6	78.6	78.6	78.6
≥ 8000		73.7	76.9	76.9	78.4	78.7	79.6	80.1	80.1	80.2	80.2	80.2	80.4	80.4	80.4	80.4
≥ 7000		74.6	77.8	77.8	79.6	79.9	80.9	81.3	81.3	81.5	81.5	81.5	81.6	81.6	81.6	81.6
≥ 6000		74.9	77.8	77.8	79.6	79.9	80.9	81.5	81.5	81.6	81.6	81.6	81.9	81.9	81.9	81.9
≥ 5000		76.1	79.3	79.3	81.3	81.6	82.5	83.2	83.2	83.3	83.3	83.3	83.6	83.6	83.6	83.6
≥ 4500		76.1	79.3	79.3	81.3	81.6	82.5	83.2	83.2	83.3	83.3	83.3	83.6	83.6	83.6	83.6
≥ 4000		78.3	81.6	81.6	83.9	84.2	85.1	85.8	85.8	86.2	86.2	86.2	86.5	86.5	86.5	86.5
≥ 3500		78.9	82.2	82.2	84.5	84.8	85.8	86.4	86.4	86.8	86.8	86.8	87.1	87.1	87.1	87.1
≥ 3000		83.0	86.4	86.7	90.2	90.5	91.4	92.0	92.0	92.6	92.6	92.6	93.0	93.0	93.0	93.0
≥ 2500		83.3	87.0	87.3	91.3	91.9	92.8	93.4	93.7	94.5	94.8	94.8	95.1	95.1	95.1	95.1
≥ 2000		83.6	87.9	88.2	92.8	93.6	94.6	95.3	95.6	96.3	96.6	96.6	96.9	96.9	96.9	96.9
≥ 1800		83.6	88.4	88.7	93.4	94.2	95.3	95.9	96.2	96.9	97.2	97.2	97.5	97.5	97.5	97.5
≥ 1500		83.6	88.4	88.7	93.4	94.2	95.3	95.9	96.2	96.9	97.2	97.2	97.5	97.5	97.5	97.5
≥ 1200		83.6	88.4	88.7	93.4	94.5	95.6	96.2	96.5	97.2	97.5	97.5	97.9	98.0	98.0	98.0
≥ 1000		83.6	88.4	88.7	93.4	94.5	95.6	96.2	96.5	97.2	97.5	97.5	97.9	98.2	98.2	98.2
≥ 900		83.6	88.4	88.7	93.4	94.5	95.6	96.2	96.5	97.2	97.5	97.5	97.9	98.2	98.2	98.2
≥ 800		83.6	88.4	88.7	93.4	94.5	95.6	96.2	96.5	97.2	97.5	97.5	97.9	98.2	98.2	98.2
≥ 700		83.6	88.4	88.7	93.4	94.5	95.6	96.2	96.5	97.2	97.5	97.5	97.9	98.2	98.2	98.2
≥ 600		83.6	88.4	88.7	93.4	94.5	95.6	96.2	96.5	97.2	97.5	97.5	97.9	98.2	98.2	98.2
≥ 500		83.6	88.4	88.7	93.6	94.6	95.7	96.3	97.1	97.9	98.2	98.2	98.5	98.8	98.8	98.8
≥ 400		83.6	88.4	88.7	93.6	94.6	95.7	96.3	97.1	97.9	98.2	98.2	98.5	98.8	98.8	98.8
≥ 300		83.6	88.4	88.7	93.6	94.6	95.7	96.3	97.1	97.9	98.2	98.2	98.5	98.8	98.8	98.8
≥ 200		83.6	88.4	88.7	93.6	94.6	95.7	96.3	97.1	97.9	98.2	98.2	98.5	98.9	98.9	98.9
≥ 100		83.6	88.4	88.7	93.6	94.6	95.7	96.3	97.1	97.9	98.2	98.2	98.5	98.9	98.9	98.9
≥ 0		83.6	88.4	88.7	93.6	94.6	95.7	96.3	97.1	97.9	98.2	98.2	98.5	99.1	99.1	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM NO. 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
...EATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) NOV (MONTH)

(HOURS LST)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		53.9	57.1	57.1	62.9	63.2	63.8	64.1	64.2	64.4	64.4	64.4	64.7	64.7	64.7	65.1
≥ 20000		56.7	60.6	60.6	66.5	67.3	67.6	67.9	68.0	68.2	68.2	68.2	68.5	68.5	68.5	68.8
≥ 18000		57.7	63.9	63.9	70.9	71.4	72.0	72.3	72.4	72.6	72.6	72.6	72.9	72.9	72.9	73.2
≥ 16000		57.7	63.9	63.9	70.9	71.4	72.0	72.3	72.4	72.6	72.6	72.6	72.9	72.9	72.9	73.2
≥ 14000		61.3	64.2	64.2	71.2	71.7	72.3	72.6	72.7	72.9	72.9	72.9	73.2	73.2	73.2	73.5
≥ 12000		60.5	64.7	64.7	71.8	72.3	72.9	73.2	73.3	73.5	73.5	73.5	73.8	73.8	73.8	74.1
≥ 10000		61.8	66.4	66.4	73.8	74.2	75.0	75.3	75.5	75.6	75.6	75.6	75.9	75.9	75.9	76.2
≥ 9000		61.8	66.4	66.4	73.8	74.2	75.0	75.3	75.5	75.6	75.6	75.6	75.9	75.9	75.9	76.2
≥ 8000		62.7	67.3	67.3	74.7	75.2	75.9	76.5	76.7	76.8	76.8	76.8	77.1	77.1	77.3	77.6
≥ 7000		64.2	69.2	69.2	76.7	77.1	77.9	78.5	78.6	78.8	78.8	78.8	79.1	79.1	79.2	79.5
≥ 6000		64.4	69.4	69.4	76.8	77.3	78.3	78.6	78.8	78.9	78.9	78.9	79.2	79.2	79.4	79.7
≥ 5000		66.1	71.1	71.1	78.6	79.1	79.8	80.5	80.6	80.8	80.8	80.8	81.1	81.1	81.2	81.5
≥ 4500		66.1	71.1	71.1	78.6	79.1	79.8	80.5	80.6	80.8	80.8	80.8	81.1	81.1	81.2	81.5
≥ 4000		69.3	73.8	73.8	81.4	81.6	82.6	83.2	83.3	83.5	83.6	83.6	83.9	83.9	84.1	84.4
≥ 3500		69.8	74.2	74.2	81.8	82.3	83.0	83.9	84.1	84.2	84.4	84.4	84.7	84.7	84.9	85.2
≥ 3000		74.4	80.5	80.6	89.4	89.8	90.9	92.0	92.1	92.3	92.4	92.4	92.9	92.9	93.2	93.5
≥ 2500		75.2	81.5	82.0	90.8	91.5	92.6	93.6	93.8	93.9	94.4	94.4	95.0	95.0	95.2	95.5
≥ 2000		75.5	81.8	82.4	91.4	92.3	93.3	94.4	94.5	94.7	95.3	95.3	95.9	95.9	96.1	96.4
≥ 1800		75.5	81.8	82.4	91.4	92.3	93.3	94.4	94.5	94.7	95.3	95.3	95.9	95.9	96.1	96.4
≥ 1500		75.5	81.8	82.4	92.0	92.9	94.1	95.5	95.6	95.8	96.4	96.4	97.1	97.1	97.1	97.4
≥ 1200		75.5	81.8	82.4	92.0	93.0	94.2	95.6	95.8	95.9	96.5	96.5	97.1	97.1	97.3	97.6
≥ 1000		75.5	81.8	82.4	92.0	93.0	94.2	95.6	95.8	95.9	96.5	96.5	97.1	97.1	97.3	97.6
≥ 900		75.5	81.8	82.4	92.0	93.0	94.2	95.6	95.8	95.9	96.5	96.5	97.1	97.1	97.3	97.6
≥ 800		75.5	81.8	82.4	92.0	93.0	94.2	95.6	95.8	95.9	96.5	96.5	97.1	97.1	97.3	97.6
≥ 700		75.5	81.8	82.4	92.0	93.0	94.2	95.6	95.8	95.9	96.5	96.5	97.1	97.1	97.3	97.6
≥ 600		75.5	81.8	82.4	92.0	93.0	94.2	95.6	95.8	95.9	96.7	96.7	97.3	97.3	97.4	97.7
≥ 500		75.5	82.0	82.6	92.1	93.2	94.4	95.8	95.9	96.1	96.8	96.8	97.4	97.4	97.6	97.9
≥ 400		75.5	82.0	82.6	92.1	93.2	94.4	95.8	95.9	96.1	96.8	96.8	97.4	97.4	97.6	98.0
≥ 300		75.5	82.0	82.6	92.1	93.2	94.4	95.8	95.9	96.2	97.0	97.0	97.6	97.6	97.7	98.0
≥ 200		75.5	82.0	82.6	92.1	93.2	94.4	95.8	95.9	96.2	97.0	97.0	97.6	97.6	97.9	98.2
≥ 100		75.5	82.0	82.6	92.1	93.2	94.4	95.8	95.9	96.2	97.0	97.0	97.6	97.6	97.9	98.2
≥ 0		75.5	82.0	82.6	92.1	93.2	94.4	95.8	95.9	96.2	97.0	97.0	97.6	97.6	97.9	98.2

TOTAL NUMBER OF OBSERVATIONS 66...

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

12 (STATION) TAFGU AB KO (STATION NAME) 68-69,73-79 (YEARS) NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

0300-0900 (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		41..	44.8	45.8	51.1	51.9	53.2	54.9	55.6	56.3	56.9	56.9	58.2	58..	59.5	60.6
≥ 20000		42.3	46.5	47.2	53.5	54.5	55.9	57.9	58.6	59.6	60.2	60.2	61.4	61.4	61.7	63..
≥ 18000		43.7	48.3	49.1	56.2	57.4	59.1	61.1	61.9	62.8	63.6	63.6	64.8	64.8	65.1	67.3
≥ 16000		43.7	48.3	49.1	56.2	57.4	59.1	61.1	61.9	62.8	63.6	63.6	64.8	64.8	65.1	67.3
≥ 14000		44.3	4..1	49.8	56.9	58.2	59.9	62..	62.8	63.7	64.5	64.5	65.7	65.7	66.0	68.2
≥ 12000		44.4	48.4	5..2	57.4	58.6	6..3	62.7	63.4	64.7	65.4	65.4	66.8	66.8	67.1	69.3
≥ 10000		46..	51.2	52.0	59.6	61..	62.7	65.0	65.7	67..	67.7	67.7	69.1	69.1	69.4	71.6
≥ 9000		46.0	51.2	52.0	59.6	61.0	62.7	65.0	65.7	67.0	67.7	67.7	69.1	69.1	69.4	71.6
≥ 8000		47.4	52.9	53.7	61.4	63.0	64.7	67.1	67.9	69.1	69.9	69.9	71.3	71.3	71.6	73.8
≥ 7000		48.6	54.8	55.6	63.4	65.1	66.8	69.3	70.1	71.3	72.2	72.2	73.6	73.6	73.9	76.1
≥ 6000		49.8	55.1	55.9	63.7	65.4	67.1	69.6	7..4	71.6	72.5	72.5	73.9	73.9	74.2	76.4
≥ 5000		49.9	55.4	56.2	64.2	65.9	67.6	70.1	70.8	72.1	73..	73.0	74.4	74.4	74.7	76.9
≥ 4500		49.4	55..	56.6	64.8	66.5	68.2	70.7	71.5	72.7	73.6	73.6	75.0	75.0	75.3	77.5
≥ 4000		5..6	57.9	58.6	67.1	68.8	7..5	73.0	73.8	75.0	75.9	75.9	77.3	77.3	77.6	79.8
≥ 3500		51.7	59.1	60.0	68.5	7J.2	71.9	74.4	75.2	76.4	77.3	77.3	78.7	78.7	79..	81.2
≥ 3000		56.2	63.7	64.8	74.7	76.4	78.2	80.9	81.9	83.2	84.3	84.3	85.6	85.6	86..	88.1
≥ 2500		56.3	64.2	65.3	75.6	77.3	79.5	82.6	83.8	85.0	86.1	86.1	87.5	87.5	87.8	9...
≥ 2000		56.6	64.8	65.9	76.9	78.5	80.7	84.1	85.3	87.0	88.1	88.1	89.5	89.5	89.8	92..
≥ 1800		56.8	65..	66.0	77.0	78.7	80.9	84.3	85.5	87.2	88.3	88.3	89.7	89.7	90.0	92.1
≥ 1500		56.8	65..	66.0	77.3	79.0	81.5	85.0	86.3	88.1	89.2	89.2	90.6	90.6	90.9	93.1
≥ 1200		56.9	65.1	66.2	77.5	79.3	81.8	85.3	86.7	88.7	89.8	89.8	91.2	91.2	91.5	93.7
≥ 1000		56.9	65.1	66.2	77.5	79.3	81.8	85.3	86.7	88.7	89.8	89.8	91.4	91.4	91.7	93.8
≥ 900		56.9	65.1	66.2	77.5	79.3	81.8	85.3	86.7	88.7	89.8	89.8	91.4	91.4	91.7	93.8
≥ 800		56.9	65.1	66.2	77.5	79.3	81.8	85.3	86.7	88.7	89.8	89.8	91.4	91.4	91.7	94.0
≥ 700		56.9	65.1	66.2	77.5	79.3	81.8	85.3	86.7	88.7	89.8	89.8	91.4	91.4	91.7	94.1
≥ 600		56.9	65.1	66.2	77.5	79.3	81.8	85.3	86.7	89.0	90.1	90.1	91.7	91.7	92.0	94.3
≥ 500		56.9	65.1	66.2	77.5	79.3	81.8	85.5	86.9	89.2	90.3	90.3	92.0	92.0	92.3	95.1
≥ 400		56.9	65.1	66.2	77.5	79.3	81.8	85.5	86.9	89.2	90.3	90.3	92.0	92.0	92.4	95.2
≥ 300		56.9	65.1	66.2	77.5	79.3	81.8	85.5	86.9	89.2	90.3	90.3	92.3	92.4	92.9	95.8
≥ 200		56.9	65.1	66.2	77.5	79.3	81.8	85.5	86.9	89.2	90.3	90.3	92.3	92.4	93.1	96..
≥ 100		56.9	65.1	66.2	77.5	79.3	81.9	85.6	87.0	89.4	90.4	90.4	92.4	92.6	93.2	98.9
≥ 0		56.9	65.1	66.2	77.5	79.3	81.9	85.6	87..	89.4	90.4	90.4	92.4	92.6	93.2	100..

TOTAL NUMBER OF OBSERVATIONS 648

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] AIR FORCE BASE STATION NAME | 66-69,73-79 YEARS | NOV MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		33.7	36.7	37.3	45.1	46.6	49.8	52.0	53.0	54.0	54.3	54.9	55.5	55.5	55.9	[illegible]
≥ 20000		36.2	39.2	40.1	48.5	51.0	54.1	56.3	57.4	58.7	59.4	59.6	60.2	60.2	60.5	61.[illegible]
≥ 18000		37.3	4[illegible].9	41.7	51.8	53.8	57.1	59.3	60.5	61.8	62.6	62.7	63.5	63.5	63.8	64.[illegible]
≥ 16000		37.4	41.2	42.[illegible]	52.1	54.1	57.4	59.6	60.8	62.1	62.9	63.0	63.8	63.8	64.1	64.1
≥ 14000		38.1	41.9	42.6	52.7	54.8	58.[illegible]	60.2	61.5	62.9	63.7	63.8	64.6	64.6	64.9	64.9
≥ 12000		38.4	42.3	43.2	53.5	55.7	59.[illegible]	61.5	62.7	64.3	65.1	65.2	66.0	66.0	66.3	66.3
≥ 10000		39.5	43.5	44.6	55.5	57.9	61.2	63.8	65.2	66.8	67.7	67.9	68.6	68.6	69.[illegible]	69.[illegible]
≥ 9000		39.5	43.5	44.6	55.7	58.3	61.3	64.3	65.4	66.9	67.9	68.[illegible]	68.8	68.8	69.1	69.1
≥ 8000		40.6	44.6	45.7	57.4	59.8	63.3	66.3	67.7	69.3	70.[illegible]	70.5	71.3	71.3	71.6	71.6
≥ 7000		41.7	45.9	47.3	59.4	61.8	65.4	68.3	69.7	71.3	72.4	72.5	73.3	73.3	73.6	73.6
≥ 6000		41.7	45.9	47.0	59.4	61.8	65.4	68.5	69.9	71.5	72.5	72.7	73.5	73.5	73.8	73.[illegible]
≥ 5000		41.8	46.3	47.6	60.2	62.7	66.3	69.4	70.8	72.4	73.5	73.6	74.4	74.4	74.7	74.[illegible]
≥ 4500		42.0	46.5	47.7	60.7	63.2	66.8	69.9	71.3	72.9	73.9	74.1	74.9	74.9	75.2	75.[illegible]
≥ 4000		43.1	47.6	48.8	62.4	64.9	68.5	71.6	73.[illegible]	74.9	76.[illegible]	76.1	76.9	76.9	77.2	77.[illegible]
≥ 3500		44.1	48.0	50.2	63.8	66.5	70.4	73.5	74.9	76.9	78.0	78.3	79.1	79.1	79.4	79.4
≥ 3000		49.3	54.9	56.2	70.5	73.3	77.2	80.5	81.9	84.1	85.2	85.5	86.4	86.4	86.7	86.7
≥ 2500		49.9	55.5	56.8	71.8	74.7	78.9	82.5	83.9	86.4	87.8	88.1	89.1	89.1	89.4	89.4
≥ 2000		49.9	55.9	57.1	72.4	75.4	79.7	83.8	85.3	87.8	89.2	89.5	9[illegible].6	9[illegible].6	91.[illegible]	91.[illegible]
≥ 1800		50.4	56.3	57.6	72.9	76.0	80.3	84.4	86.0	88.5	89.9	90.2	91.3	91.3	91.6	91.6
≥ 1500		50.4	56.3	57.6	73.2	76.3	80.7	85.0	86.7	89.2	90.6	91.0	92.2	92.2	92.5	92.5
≥ 1200		50.4	56.3	57.6	73.2	76.3	80.7	85.2	86.9	89.4	91.0	91.3	92.7	92.7	93.0	93.0
≥ 1000		50.4	56.3	57.6	73.3	76.4	81.0	85.5	87.2	89.7	91.7	92.0	93.8	93.8	94.1	94.1
≥ 900		50.4	56.3	57.6	73.3	76.4	81.1	85.5	87.2	89.7	91.7	92.[illegible]	93.8	93.8	94.1	94.1
≥ 800		50.4	56.3	57.6	73.3	76.4	81.[illegible]	85.5	87.2	89.9	92.[illegible]	92.4	94.4	94.4	94.7	94.7
≥ 700		50.4	56.3	57.6	73.3	76.4	81.3	85.5	87.2	89.9	92.[illegible]	92.4	94.4	94.4	94.7	94.7
≥ 600		50.4	56.3	57.6	73.3	76.4	81.0	85.5	87.2	89.9	92.[illegible]	92.4	94.5	94.5	94.9	94.9
≥ 500		51.4	56.3	57.6	73.3	76.4	81.0	85.5	87.2	89.9	92.[illegible]	92.5	95.2	95.2	95.6	96.3
≥ 400		50.4	56.3	57.6	73.3	76.6	81.1	85.6	87.4	9[illegible].3	92.5	93.1	95.9	95.9	96.4	97.[illegible]
≥ 300		50.4	56.3	57.6	73.3	76.6	81.3	86.0	87.7	9[illegible].8	93.[illegible]	93.6	96.4	96.4	96.9	97.[illegible]
≥ 200		50.4	56.3	57.6	73.3	76.6	81.3	86.3	87.7	90.8	93.[illegible]	93.6	96.4	96.9	97.3	98.[illegible]
≥ 100		50.4	56.3	57.6	73.3	76.6	81.3	86.0	87.7	90.8	93.1	93.8	96.6	97.[illegible]	97.5	99.4
≥ 0		50.4	56.3	57.6	73.3	76.6	81.3	86.0	87.7	90.8	93.1	93.8	96.6	97.2	97.7	1[illegible].0

TOTAL NUMBER OF OBSERVATIONS 641

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

CL [illegible]AL CLIMATOLOGY BRANCH
[illegible] AFETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] 1 (STATION) | [illegible]AFFU AB MO (STATION NAME) | 68-69,73-79 (YEARS) | NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-14[illegible] (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		49.[illegible]	51.4	51.7	55.7	56.6	57.6	58.1	58.1	58.2	58.2	58.4	58.4	58.4	58.4	58.4
≥ 20000		54.2	57.[illegible]	57.5	61.9	63.3	64.0	64.6	64.6	64.7	64.7	64.9	64.9	64.9	64.9	64.9
≥ 18000		56.[illegible]	59.4	59.9	65.2	66.2	67.4	68.0	68.0	68.1	68.1	68.3	68.3	68.3	68.3	68.3
≥ 16000		59.9	6[illegible].3	6[illegible].7	66.1	67.1	68.3	68.9	68.9	69.0	69.0	69.2	69.2	69.2	69.2	69.2
≥ 14000		56.2	61.8	62.2	67.6	68.6	69.9	70.5	70.5	70.7	70.7	70.8	70.8	70.8	70.8	70.8
≥ 12000		56.8	62.4	62.8	68.1	69.2	70.5	71.1	71.1	71.3	71.3	71.4	71.4	71.4	71.4	71.4
≥ 10000		63.0	63.9	64.3	70.2	71.3	72.9	73.5	73.6	73.8	73.8	73.9	73.9	73.9	73.9	73.9
≥ 9000		63.0	63.9	64.3	70.2	71.3	72.9	73.5	73.6	73.8	73.8	73.9	73.9	73.9	73.9	73.9
≥ 8000		63.3	64.1	64.6	71.0	72.0	73.8	74.5	74.7	74.8	74.8	75.[illegible]	75.0	75.[illegible]	75.[illegible]	75.[illegible]
≥ 7000		63.7	64.6	65.0	71.4	72.4	74.5	75.3	75.4	75.6	75.6	75.7	75.7	75.7	75.7	75.7
≥ 6000		63.7	65.2	65.6	72.1	73.2	75.3	76.0	76.1	76.3	76.3	76.4	76.4	76.4	76.4	76.4
≥ 5000		63.9	65.3	65.8	72.4	73.5	75.6	76.3	76.6	76.7	76.7	76.9	76.9	76.9	76.9	76.9
≥ 4500		63.9	65.3	65.6	72.4	73.5	75.6	76.3	76.6	76.7	76.7	76.9	76.9	76.9	76.9	76.9
≥ 4000		66.4	71.3	71.7	78.7	79.9	81.9	82.7	83.[illegible]	83.1	83.1	83.3	83.3	83.3	83.3	83.3
≥ 3500		67.7	72.6	73.0	80.4	81.9	84.0	84.7	85.[illegible]	85.2	85.2	85.3	85.3	85.3	85.3	85.3
≥ 3000		72.0	77.0	77.5	85.3	87.0	89.2	90.1	90.5	90.7	90.8	91.[illegible]	91.1	91.1	91.1	91.1
≥ 2500		73.2	78.2	78.7	87.0	88.6	91.0	92.0	92.6	92.7	92.9	93.[illegible]	93.[illegible]	93.2	93.2	93.2
≥ 2000		73.3	78.4	78.8	87.3	88.9	91.4	93.0	93.6	93.9	94.1	94.2	94.2	94.4	94.4	94.4
≥ 1800		73.9	79.1	79.6	88.1	89.8	92.4	94.1	94.7	95.0	95.1	95.3	95.3	95.4	95.4	95.4
≥ 1500		73.9	79.1	79.6	88.3	89.9	92.6	94.2	94.8	95.1	95.3	95.4	95.4	95.6	95.6	95.6
≥ 1200		73.9	79.1	79.6	88.3	90.1	92.7	94.4	95.[illegible]	95.7	95.9	96.[illegible]	96.1	96.3	96.3	96.3
≥ 1000		74.1	79.3	79.7	88.7	90.7	93.3	95.4	96.[illegible]	96.7	96.9	97.2	97.2	97.3	97.3	97.3
≥ 900		74.1	79.3	79.7	88.7	90.7	93.3	95.4	96.[illegible]	96.7	96.9	97.2	97.2	97.3	97.3	97.3
≥ 800		74.1	79.3	79.7	88.7	90.7	93.5	95.7	96.3	97.0	97.2	97.5	97.5	97.6	97.6	97.6
≥ 700		74.2	79.4	79.9	89.2	91.1	93.9	96.1	96.7	97.5	97.8	98.1	98.1	98.2	98.2	98.2
≥ 600		74.2	79.4	79.9	89.2	91.1	93.9	96.1	96.7	97.6	97.9	98.4	98.4	98.5	98.5	98.5
≥ 500		74.2	79.4	79.9	89.3	91.3	94.1	96.9	97.5	98.4	98.7	99.1	99.1	99.3	99.3	99.3
≥ 400		74.2	79.4	79.9	89.3	91.3	94.1	97.0	97.6	98.5	98.8	99.3	99.3	99.4	99.4	99.4
≥ 300		74.2	79.4	79.9	89.3	91.3	94.1	97.3	98.1	99.0	99.3	99.7	99.7	99.9	99.9	99.9
≥ 200		74.2	79.4	79.9	89.3	91.3	94.1	97.3	98.1	99.0	99.3	99.7	99.7	99.9	99.9	99.9
≥ 100		74.2	79.4	79.9	89.3	91.3	94.1	97.3	98.1	99.0	99.3	99.7	99.7	99.9	100.0	100.0
≥ 0		74.2	79.4	79.9	89.3	91.3	94.1	97.3	98.1	99.0	99.3	99.7	99.7	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS [illegible]7[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 [illegible] STATION NAME 63-69, 73-79 YEARS MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		54.9	55.1	56.2	56.8	56.8	57.4	58.2	58.2	58.2	59.2	59.2	59.2	59.4	59.7	59.7
≥ 20000		61.3	62.1	62.3	63.0	63.2	63.7	64.7	64.7	64.7	64.7	64.7	64.7	64.7	64.7	64.7
≥ 18000		64.5	65.6	65.9	67.1	67.2	67.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8	68.8
≥ 16000		64.6	65.9	66.1	67.2	67.3	67.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9	68.9
≥ 14000		65.5	67.1	67.2	68.5	68.8	69.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4	70.4
≥ 12000		66.3	67.9	68.1	69.7	69.9	70.5	71.5	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 10000		68.3	70.4	70.7	72.7	73.3	73.7	74.9	75.1	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 9000		68.5	70.4	70.7	72.7	73.3	73.7	74.9	75.1	75.3	75.3	75.3	75.3	75.3	75.3	75.3
≥ 8000		69.5	71.5	71.8	73.8	74.1	74.9	76.3	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 7000		69.8	71.8	72.1	74.1	74.4	75.1	76.4	76.6	76.6	76.6	76.6	76.6	76.6	76.6	76.6
≥ 6000		70.1	72.1	72.4	74.4	74.7	75.4	76.7	76.9	76.9	76.9	76.9	76.9	76.9	76.9	76.9
≥ 5000		70.6	72.9	73.1	75.1	75.4	76.2	77.6	77.7	77.7	77.7	77.7	77.7	77.7	77.7	77.7
≥ 4500		71.7	73.7	74.0	76.2	76.4	77.2	78.6	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9
≥ 4000		75.4	77.7	78.3	80.8	81.1	81.8	83.2	83.4	83.5	83.5	83.5	83.5	83.5	83.5	83.5
≥ 3500		78.3	80.9	81.2	84.2	84.5	85.3	86.7	86.9	87.0	87.0	87.0	87.0	87.0	87.0	87.0
≥ 3000		83.4	86.0	86.3	89.7	90.1	90.8	92.3	92.5	92.6	92.6	92.6	92.6	92.6	92.6	92.6
≥ 2500		84.7	87.7	88.3	92.6	92.9	93.6	95.2	95.4	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 2000		85.4	88.6	89.2	93.5	93.9	94.8	96.4	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 1800		85.4	88.6	89.2	93.6	93.9	94.8	96.4	96.5	96.7	96.7	96.7	96.7	96.7	96.7	96.7
≥ 1500		85.4	88.7	89.3	94.2	94.5	95.4	97.0	97.1	97.3	97.3	97.3	97.3	97.3	97.3	97.3
≥ 1200		85.4	88.7	89.3	94.4	94.7	95.7	97.4	97.7	97.8	98.0	98.0	98.0	98.0	98.0	98.0
≥ 1000		85.4	88.7	89.3	94.6	95.2	96.2	98.1	98.4	98.6	98.7	98.7	98.7	98.7	98.7	98.7
≥ 900		85.4	88.7	89.3	94.8	95.2	96.2	98.1	98.4	98.6	98.7	98.7	98.7	98.7	98.7	98.7
≥ 800		85.4	88.7	89.3	94.8	95.2	96.2	98.1	98.4	98.6	98.7	98.7	98.7	98.7	98.7	98.7
≥ 700		85.4	88.7	89.3	94.9	95.4	96.4	98.3	98.6	98.7	98.8	98.8	98.8	98.8	98.8	98.8
≥ 600		85.4	88.7	89.3	94.9	95.4	96.4	98.3	98.6	98.7	98.8	98.8	99.1	99.1	99.1	99.1
≥ 500		85.4	88.7	89.3	94.9	95.4	96.4	98.4	98.8	99.1	99.3	99.3	99.6	99.6	99.6	99.6
≥ 400		85.4	88.7	89.3	94.9	95.4	96.4	98.4	98.8	99.1	99.3	99.3	99.6	99.6	99.6	99.6
≥ 300		85.5	88.9	89.5	95.1	95.5	96.5	98.7	99.1	99.4	99.6	99.6	99.9	99.9	99.9	99.9
≥ 200		85.5	88.9	89.5	95.1	95.5	96.5	98.7	99.1	99.4	99.6	99.6	100.0	100.0	100.0	100.0
≥ 100		85.5	88.9	89.5	95.1	95.5	96.5	98.7	99.1	99.4	99.6	99.6	100.0	100.0	100.0	100.0
≥ 0		85.5	88.9	89.5	95.1	95.5	96.5	98.7	99.1	99.4	99.6	99.6	100.0	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 692

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...AFETAC
...EATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

... | ...EFO A... KO (STATION NAME) | 68-69,73-79 (YEARS) | NOV (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

... (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES														
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		59.4	5[illegible].8	59.3	62.6	60.9	61.5	61.5	61.5	61.9	62.0	62.0	62.1	62.1	62.1	62.1
≥ 20000		64.3	64.6	64.6	65.7	66.2	66.8	66.9	66.9	67.2	67.4	67.4	67.4	67.4	67.4	67.4
≥ 18000		67.8	68.1	68.4	69.2	69.8	70.3	70.5	70.5	70.7	70.9	70.9	70.9	70.9	70.9	70.9
≥ 16000		67.9	68.2	68.5	69.3	69.9	70.5	70.6	70.6	70.9	71.0	71.0	71.0	71.0	71.0	71.0
≥ 14000		68.9	69.3	69.8	70.8	71.2	71.7	71.9	71.9	72.2	72.3	72.3	72.3	72.3	72.3	72.3
≥ 12000		69.9	70.3	70.7	71.6	72.2	72.7	72.9	72.9	73.1	73.3	73.3	73.3	73.3	73.3	73.3
≥ 10000		71.4	72.0	72.4	73.4	74.0	74.7	74.8	74.8	75.1	75.2	75.2	75.2	75.2	75.2	75.2
≥ 9000		71.4	72.0	72.4	73.4	74.0	74.7	74.8	74.8	75.1	75.2	75.2	75.2	75.2	75.2	75.2
≥ 8000		72.7	73.3	73.7	74.7	75.2	75.9	76.1	76.1	76.5	76.7	76.7	76.7	76.7	76.7	76.7
≥ 7000		73.1	73.7	74.1	75.1	75.7	76.4	76.5	76.5	77.1	77.2	77.2	77.2	77.2	77.2	77.2
≥ 6000		73.1	73.7	74.1	75.1	75.7	76.4	76.5	76.5	77.1	77.2	77.2	77.2	77.2	77.2	77.2
≥ 5000		73.6	74.1	74.5	75.8	76.4	77.1	77.4	77.4	77.9	78.1	78.1	78.1	78.1	78.1	78.1
≥ 4500		73.6	74.1	74.5	75.8	76.4	77.1	77.4	77.4	77.9	78.1	78.1	78.1	78.1	78.1	78.1
≥ 4000		75.7	76.7	77.1	78.5	79.0	80.0	80.3	80.3	80.9	81.1	81.1	81.1	81.1	81.1	81.1
≥ 3500		76.7	77.6	78.1	79.5	80.0	81.0	81.3	81.3	81.9	82.1	82.1	82.1	82.1	82.1	82.1
≥ 3000		84.8	86.1	86.5	89.6	90.2	91.4	92.0	92.0	92.7	92.8	92.8	92.8	92.8	92.8	92.8
≥ 2500		85.5	87.5	87.9	91.6	92.4	93.7	94.2	94.2	94.9	95.1	95.1	95.1	95.1	95.1	95.1
≥ 2000		86.1	88.3	88.7	92.5	93.4	94.9	95.5	95.5	96.2	96.3	96.3	96.5	96.5	96.5	96.5
≥ 1800		86.1	88.3	88.7	92.5	93.4	94.9	95.5	95.5	96.2	96.3	96.3	96.5	96.5	96.5	96.5
≥ 1500		86.1	89.0	89.5	93.7	94.8	96.5	97.0	97.0	97.7	98.0	98.0	98.2	98.2	98.2	98.2
≥ 1200		86.1	89.0	89.5	93.7	94.8	96.5	97.2	97.2	97.9	98.2	98.2	98.3	98.3	98.3	98.3
≥ 1000		86.1	89.0	89.5	93.7	94.8	96.5	97.2	97.2	97.9	98.3	98.3	98.5	98.5	98.5	98.5
≥ 900		86.1	89.0	89.5	93.7	94.8	96.5	97.2	97.2	97.9	98.3	98.3	98.5	98.5	98.5	98.5
≥ 800		86.1	89.0	89.5	93.7	94.8	96.5	97.2	97.2	97.9	98.3	98.3	98.5	98.5	98.5	98.5
≥ 700		86.1	89.2	89.6	93.8	94.9	96.6	97.3	97.3	98.0	98.6	98.6	98.9	98.9	98.9	98.9
≥ 600		86.1	89.2	89.6	93.8	94.9	96.6	97.5	97.5	98.2	98.7	98.7	99.0	99.0	99.0	99.0
≥ 500		86.1	89.2	89.6	93.8	94.9	96.8	97.6	97.7	98.5	99.0	99.0	99.3	99.3	99.3	99.3
≥ 400		86.1	89.2	89.6	93.8	94.9	96.8	97.6	97.9	98.6	99.2	99.2	99.4	99.4	99.4	99.4
≥ 300		86.1	89.2	89.6	93.8	94.9	96.8	97.6	97.9	98.7	99.3	99.3	99.6	99.6	99.6	99.6
≥ 200		86.1	89.2	89.6	93.8	94.9	96.8	97.6	97.9	98.9	99.4	99.4	99.7	99.7	99.7	99.7
≥ 100		86.1	89.2	89.6	93.8	94.9	96.8	97.6	97.9	98.9	99.4	99.4	99.7	99.7	99.7	99.7
≥ 0		86.1	89.2	89.6	93.8	94.9	96.8	97.6	97.9	98.9	99.4	99.4	99.7	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 71[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | [illegible] STATION NAME | 68-69, 73-79 YEARS | NOV MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥⅜	≥5/16	≥¼	≥0
NO CEILING		6[illegible].8	62.4	6[illegible].7	63.5	63.5	63.9	64.0	64.[illegible]	64.1	64.1	64.1	64.1	64.1	64.1	64.[illegible]
≥ 20000		64.6	65.1	66.4	67.3	67.4	68.[illegible]	68.2	68.[illegible]	68.3	68.3	68.3	68.3	68.3	68.3	68.[illegible]
≥ 18000		66.3	67.9	68.2	69.[illegible]	69.2	69.7	69.9	69.9	70.0	70.0	70.0	70.0	70.0	70.0	70.[illegible]
≥ 16000		66.6	68.[illegible]	68.4	69.3	69.5	70.0	70.2	70.[illegible]	70.3	70.3	70.3	70.3	70.3	70.3	70.3
≥ 14000		68.6	70.[illegible]	70.6	71.5	71.6	72.2	72.3	72.3	72.5	72.5	72.5	72.5	72.5	72.5	72.5
≥ 12000		69.2	70.7	71.2	72.[illegible]	72.2	72.8	72.9	72.9	73.1	73.1	73.1	73.1	73.1	73.1	73.1
≥ 10000		71.5	73.5	73.9	74.8	75.2	75.8	75.9	75.9	76.1	76.1	76.1	76.1	76.1	76.1	76.1
≥ 9000		71.5	73.5	73.9	74.8	75.2	75.8	75.9	75.9	76.1	76.1	76.1	76.1	76.1	76.1	76.1
≥ 8000		72.3	74.4	74.8	75.6	76.1	76.8	76.9	76.9	77.1	77.1	77.1	77.1	77.1	77.1	77.1
≥ 7000		72.9	75.1	75.6	76.5	76.9	77.7	77.8	77.8	78.0	78.0	78.0	78.0	78.0	78.0	78.
≥ 6000		73.2	75.4	75.9	76.8	77.2	78.0	78.1	78.1	78.4	78.4	78.4	78.4	78.4	78.4	78.4
≥ 5000		74.2	76.4	76.9	77.8	78.2	79.0	79.1	79.1	79.4	79.4	79.4	79.4	79.4	79.4	79.4
≥ 4500		74.2	76.4	76.9	77.8	78.2	79.0	79.1	79.1	79.4	79.4	79.4	79.4	79.4	79.4	79.4
≥ 4000		75.6	77.8	78.4	79.4	79.8	80.8	81.0	81.[illegible]	81.4	81.4	81.4	81.4	81.4	81.4	81.4
≥ 3500		76.2	78.4	79.3	80.3	80.7	81.7	81.8	81.8	82.3	82.3	82.3	82.3	82.3	82.3	82.3
≥ 3000		86.4	88.0	88.6	90.8	91.2	92.4	92.5	92.5	93.4	93.4	93.4	93.4	93.4	93.4	93.4
≥ 2500		86.5	89.6	90.2	92.8	93.2	95.0	95.1	95.1	96.[illegible]	96.[illegible]	96.[illegible]	96.0	96.[illegible]	96.[illegible]	96.
≥ 2000		86.6	89.9	90.5	93.5	93.9	96.0	96.1	96.1	97.[illegible]	97.[illegible]	97.[illegible]	97.0	97.[illegible]	97.[illegible]	97.
≥ 1800		86.7	90.3	90.9	94.1	94.5	96.5	96.7	96.7	97.6	97.6	97.6	97.6	97.6	97.6	97.6
≥ 1500		86.7	90.6	91.2	94.4	94.8	96.8	97.0	97.[illegible]	97.8	97.8	97.8	97.8	97.8	97.8	97.8
≥ 1200		86.7	90.6	91.4	94.5	95.2	97.3	97.4	97.4	98.3	98.3	98.3	98.3	98.4	98.4	98.4
≥ 1000		86.7	90.6	91.4	94.5	95.2	97.3	97.4	97.4	98.3	98.3	98.3	98.3	98.4	98.6	98.6
≥ 900		86.7	90.6	91.4	94.5	95.2	97.3	97.4	97.4	98.3	98.3	98.3	98.3	98.4	98.6	98.6
≥ 800		86.7	91.6	91.4	94.5	95.2	97.3	97.4	97.4	98.3	98.3	98.3	98.3	98.4	98.6	98.6
≥ 700		86.7	90.6	91.4	94.5	95.2	97.3	97.4	97.4	98.3	98.3	98.3	98.3	98.4	98.6	98.6
≥ 600		86.7	90.6	91.4	94.5	95.2	97.3	97.4	97.4	98.3	98.3	98.3	98.3	98.4	98.6	98.6
≥ 500		86.7	90.6	91.4	94.5	95.2	97.6	97.7	97.7	98.6	98.7	98.7	98.7	98.8	99.0	99.[illegible]
≥ 400		86.7	90.6	91.4	94.5	95.2	97.6	97.7	97.7	98.6	98.7	98.7	98.7	98.8	99.0	99.
≥ 300		86.7	90.6	91.4	94.5	95.2	97.6	97.7	97.8	98.7	98.8	99.0	99.0	99.1	99.3	99.7
≥ 200		86.7	90.6	91.4	94.5	95.2	97.6	97.7	97.8	98.7	98.8	99.0	99.0	99.1	99.3	99.6
≥ 100		86.7	90.6	91.4	94.5	95.2	97.6	97.7	97.8	98.7	98.8	99.0	99.0	99.1	99.3	99.6
≥ 0		86.7	90.6	91.4	94.5	95.2	97.6	97.7	97.8	98.7	98.8	99.0	99.0	99.1	99.3	100.

TOTAL NUMBER OF OBSERVATIONS 694

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[ ]12 TAEGU AB KO 68-69,73-79 NOV
STATION STATION NAME YEARS MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL
HOURS LST

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥⅛ 16	≥0	≥0
NO CEILING		[illegible]	54.5	54.6	55.0	55.5	59.5	61.2	61.4	61.8	61.9	61.3	61.3	61.3	61.3	61.6
≥ 20000		58.1	58.5	58.6	62.4	63.0	64.1	64.9	65.2	65.5	65.7	65.8	66.0	66.2	66.2	66.4
≥ 18000		58.4	61.1	61.4	65.6	66.2	67.4	68.2	68.5	68.8	69.1	69.1	69.4	69.4	69.4	69.7
≥ 16000		58.5	61.3	61.6	65.8	66.5	67.6	68.4	68.7	69.1	69.3	69.3	69.6	69.6	69.7	70.0
≥ 14000		59.5	62.3	62.7	66.8	67.5	68.7	69.6	69.8	70.2	70.4	70.5	70.7	70.7	70.8	71.1
≥ 12000		60.0	62.7	63.2	67.5	68.2	69.4	70.3	70.6	71.0	71.2	71.3	71.6	71.6	71.7	72.0
≥ 10000		61.7	64.8	65.2	69.8	70.6	71.8	72.8	73.1	73.5	73.8	73.8	74.1	74.1	74.2	74.5
≥ 9000		61.7	64.8	65.2	69.8	70.6	71.8	72.8	73.1	73.6	73.9	73.9	74.1	74.1	74.2	74.5
≥ 8000		62.7	65.9	66.3	71.0	71.9	73.2	74.3	74.6	75.1	75.3	75.3	75.7	75.7	75.8	76.1
≥ 7000		63.5	66.8	67.3	72.2	73.2	74.4	75.5	75.8	76.3	76.6	76.6	76.9	76.9	77.0	77.3
≥ 6000		63.6	67.0	67.5	72.4	73.3	74.6	75.8	76.1	76.6	76.8	76.9	77.2	77.2	77.3	77.6
≥ 5000		63.7	67.8	68.3	73.3	74.2	75.6	76.7	77.1	77.6	77.8	77.9	78.2	78.2	78.3	78.6
≥ 4500		64.5	68.4	68.5	73.6	74.5	75.8	77.0	77.3	77.9	78.1	78.2	78.5	78.5	78.6	78.9
≥ 4000		67.3	72.8	73.3	78.6	77.6	79.0	80.2	80.5	81.1	81.4	81.4	81.8	81.8	81.9	82.2
≥ 3500		68.1	72.0	72.5	78.0	79.0	80.5	81.7	82.1	82.6	82.9	83.0	83.3	83.3	83.4	83.7
≥ 3000		73.9	78.1	78.7	85.2	86.2	87.8	89.2	89.5	90.3	90.6	90.7	91.0	91.0	91.1	91.4
≥ 2500		74.7	79.2	79.8	86.9	88.0	89.8	91.2	91.7	92.5	92.9	93.0	93.4	93.4	93.5	93.8
≥ 2000		75.2	79.8	80.4	87.7	88.9	90.8	92.4	92.9	93.8	94.3	94.3	94.7	94.8	94.8	95.1
≥ 1800		75.2	80.0	80.7	88.1	89.3	91.2	92.8	93.3	94.2	94.6	94.7	95.1	95.1	95.2	95.5
≥ 1500		75.2	80.2	80.8	88.5	89.7	91.8	93.4	94.0	94.8	95.3	95.4	95.9	95.8	95.9	96.2
≥ 1200		75.2	80.2	80.9	88.6	89.9	92.0	93.7	94.3	95.2	95.7	95.9	96.3	96.3	96.4	96.7
≥ 1000		75.2	80.2	80.9	88.7	90.1	92.1	94.0	94.5	95.5	96.1	96.1	96.7	96.7	96.8	97.1
≥ 900		75.2	80.2	80.9	88.7	90.1	92.1	94.0	94.5	95.5	96.1	96.1	96.7	96.7	96.8	97.1
≥ 800		75.2	80.2	80.9	88.7	90.1	92.2	94.0	94.5	95.5	96.1	96.2	96.8	96.8	96.9	97.2
≥ 700		75.2	80.3	80.9	88.8	90.2	92.3	94.1	94.6	95.6	96.3	96.3	96.9	97.0	97.1	97.4
≥ 600		75.2	80.3	80.9	88.8	90.2	92.3	94.1	94.7	95.7	96.4	96.4	97.1	97.2	97.3	97.6
≥ 500		75.2	80.3	80.9	88.8	90.2	92.4	94.3	95.0	96.0	96.7	96.8	97.5	97.6	97.7	98.0
≥ 400		75.2	80.3	80.9	88.8	90.2	92.4	94.4	95.0	96.1	96.8	96.9	97.7	97.7	97.9	98.2
≥ 300		75.2	80.3	81.0	88.9	90.3	92.4	94.5	95.2	96.3	97.0	97.2	97.9	98.0	98.2	98.5
≥ 200		75.2	80.3	81.0	88.9	90.3	92.4	94.5	95.2	96.4	97.1	97.2	98.0	98.1	98.3	98.6
≥ 100		75.2	80.3	81.0	88.9	90.3	92.4	94.5	95.2	96.4	97.1	97.2	98.0	98.2	98.4	98.7
≥ 0		75.2	80.3	81.0	88.9	90.3	92.4	94.5	95.2	96.4	97.1	97.2	98.0	98.2	98.4	100.0

TOTAL NUMBER OF OBSERVATIONS 5374

USAF ETAC FORM NO. 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]SC
[illegible]AT-[illegible] SERVICE/[illegible]SC

CEILING VERSUS VISIBILITY

1 STATION | FARGO AP ND STATION NAME | 66-69,73-80 YEARS | DEC MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		65.4	66.0	67.[illegible]	69.7	69.7	71.2	71.6	71.6	71.7	71.7	71.7	71.7	71.7	71.7	71.7
≥ 20000		65.2	65.8	66.5	71.4	71.4	72.9	73.3	73.3	73.4	73.4	73.4	73.4	73.4	73.4	73.4
≥ 18000		66.4	70.[illegible]	70.1	72.8	73.2	74.6	75.0	75.[illegible]	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 16000		66.4	70.0	70.1	72.8	73.2	74.6	75.0	75.0	75.2	75.2	75.2	75.2	75.2	75.2	75.2
≥ 14000		66.9	7[illegible].5	7[illegible].6	73.7	74.1	75.6	76.0	76.[illegible]	76.1	76.1	76.1	76.1	76.1	76.1	76.1
≥ 12000		67.8	71.4	71.6	74.6	75.0	76.5	76.9	76.9	77.[illegible]	77.[illegible]	77.[illegible]	77.[illegible]	77.[illegible]	77.[illegible]	77.[illegible]
≥ 10000		7[illegible].4	74.[illegible]	74.1	77.2	77.6	79.0	79.4	79.4	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 9000		7[illegible].4	74.[illegible]	74.1	77.2	77.6	79.0	79.4	79.4	79.6	79.6	79.6	79.6	79.6	79.6	79.6
≥ 8000		71.3	75.2	75.3	78.5	79.2	80.6	81.0	81.0	81.2	81.2	81.2	81.2	81.2	81.2	81.2
≥ 7000		71.4	75.3	75.4	78.6	79.3	6 .8	81.2	81.2	81.3	81.3	81.3	81.3	81.3	81.3	81.3
≥ 6000		71.7	75.7	75.8	79.2	79.8	81.3	81.7	81.7	81.8	81.8	81.8	81.8	81.8	81.8	81.8
≥ 5000		72.5	76.8	76.9	80.2	80.9	82.4	82.8	82.8	82.9	82.9	82.9	82.9	82.9	82.9	82.9
≥ 4500		72.5	76.8	76.9	80.4	81.[illegible]	82.5	82.9	82.9	83.[illegible]	83.[illegible]	83.[illegible]	83.[illegible]	83.[illegible]	83.[illegible]	83.[illegible]
≥ 4000		73.2	77.[illegible]	77.[illegible]	80.1	83.7	84.4	85.8	86.2	86.2	86.4	86.4	86.4	86.4	86.4	86.4
≥ 3500		75.8	80.6	80.8	84.4	85.[illegible]	86.5	86.9	86.[illegible]	87.[illegible]	87.[illegible]	87.[illegible]	87.[illegible]	87.[illegible]	87.[illegible]	87.[illegible]
≥ 3000		82.6	88.1	88.3	92.4	93.1	94.5	95.1	95.1	95.5	95.5	95.5	95.5	95.5	95.5	95.5
≥ 2500		83.3	89.2	89.3	93.6	94.3	95.9	97.1	97.1	97.5	97.5	97.5	97.7	97.7	97.7	97.7
≥ 2000		84.3	90.1	90.3	94.5	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 1800		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 1500		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 1200		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 1000		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 900		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 800		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 700		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.1	99.1	99.3	99.3	99.3	99.3
≥ 600		84.3	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.5	99.5	99.7	99.7	99.7	99.7
≥ 500		84.3	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.5	99.5	99.7	99.7	99.7	99.7
≥ 400		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.5	99.5	99.7	99.7	99.7	99.9
≥ 300		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.5	99.5	99.7	99.7	99.7	99.9
≥ 200		84.3	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.5	99.5	99.7	99.7	99.7	99.9
≥ 100		84.[illegible]	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.5	99.5	99.7	99.7	99.7	99.9
≥ 0		84.3	90.1	90.3	94.9	95.6	97.5	98.7	98.7	99.1	99.5	99.5	99.7	99.7	99.7	100.[illegible]

TOTAL NUMBER OF OBSERVATIONS 749

USAF ETAC FORM NO. 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) TABLE AIR MD (STATION NAME) 66-69,73-80 (YEARS) DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		57.[illegible]	61.1	61.4	[illegible].2	67.4	69.1	68.9	69.1	69.2	69.2	69.2	69.3	69.3	69.4	[illegible].7
≥ 20000		[illegible].2	64.6	64.9	71.[illegible]	71.1	71.9	72.7	72.8	73.1	73.1	73.1	73.3	73.3	73.5	73.7
≥ 18000		61.8	66.3	66.6	72.7	73.[illegible]	73.7	74.5	74.6	74.9	74.9	74.9	75.2	75.2	75.3	75.6
≥ 16000		61.8	66.3	66.6	72.7	73.[illegible]	73.7	74.5	74.6	74.9	74.9	74.9	75.2	75.2	75.3	75.6
≥ 14000		62.2	66.7	67.[illegible]	73.2	73.5	74.3	75.[illegible]	75.2	75.4	75.4	75.4	75.7	75.[illegible]	75.8	76.1
≥ 12000		62.5	67.1	67.4	73.9	74.1	74.9	75.7	75.8	76.1	76.1	76.1	76.3	76.3	76.5	76.7
≥ 10000		63.1	70.[illegible]	70.7	77.4	77.6	78.4	79.3	79.5	79.7	79.7	79.7	8[illegible].0	80.[illegible]	[illegible].1	80.4
≥ 9000		65.1	72.5	72.7	77.4	77.6	78.4	79.3	79.5	79.7	79.7	79.7	8[illegible].0	80.[illegible]	[illegible].1	[illegible].4
≥ 8000		66.6	72.3	72.6	79.5	79.8	80.6	81.5	81.7	81.9	81.9	81.9	82.2	82.[illegible]	82.3	82.6
≥ 7000		66.7	72.4	72.7	79.7	80.1	81.0	81.9	82.1	82.3	82.3	82.3	82.6	82.6	82.7	82.[illegible]
≥ 6000		67.5	73.2	73.5	80.5	80.9	81.8	82.7	82.9	83.1	83.1	83.1	83.4	83.4	83.5	83.7
≥ 5000		67.9	73.6	73.9	81.0	81.4	82.3	83.2	83.4	83.6	83.6	83.6	83.9	83.9	84.[illegible]	84.[illegible]
≥ 4500		68.1	73.9	74.4	81.7	82.1	83.0	83.9	84.[illegible]	84.3	84.3	84.3	84.5	84.5	84.7	84.[illegible]
≥ 4000		68.8	74.9	75.6	83.2	83.6	84.5	85.4	85.6	85.8	85.8	85.8	86.1	86.[illegible]	86.2	86.[illegible]
≥ 3500		69.3	75.7	76.3	84.1	84.5	85.4	86.3	86.5	86.7	86.7	86.7	87.[illegible]	87.[illegible]	87.1	87.4
≥ 3000		75.2	82.4	83.2	92.1	92.5	93.4	94.3	94.4	94.8	94.8	94.8	95.1	95.1	95.2	[illegible].4
≥ 2500		76.1	83.7	84.5	93.6	94.3	95.3	96.2	96.4	96.7	96.7	96.7	97.0	97.[illegible]	97.1	97.4
≥ 2000		76.6	84.3	85.[illegible]	94.4	95.1	96.1	97.0	97.1	97.5	97.5	97.5	97.8	97.8	97.9	98.[illegible]
≥ 1800		76.6	84.3	85.[illegible]	94.4	95.1	96.1	97.0	97.1	97.5	97.5	97.5	97.8	97.8	97.9	98.[illegible]
≥ 1500		76.6	84.3	85.[illegible]	94.4	95.1	96.2	97.3	97.4	97.8	97.8	97.8	98.[illegible]	98.[illegible]	98.2	[illegible].4
≥ 1200		76.6	84.3	85.[illegible]	94.4	95.1	96.2	97.3	97.4	97.8	97.8	97.8	98.[illegible]	98.[illegible]	98.2	98.4
≥ 1000		76.6	84.3	85.[illegible]	94.4	95.1	96.2	97.3	97.4	97.8	97.8	97.8	98.[illegible]	98.[illegible]	98.2	98.4
≥ 900		76.6	84.3	85.[illegible]	94.4	95.1	96.2	97.3	97.4	97.8	97.8	97.8	98.[illegible]	98.[illegible]	98.2	98.4
≥ 800		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.5	97.8	98.2	98.2	98.2	98.4	98.4	98.6	98.8
≥ 700		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.5	97.8	98.2	98.2	98.2	98.4	98.4	98.6	98.8
≥ 600		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.7	98.[illegible]	98.4	98.4	98.4	98.7	98.7	98.8	99.1
≥ 500		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.7	98.[illegible]	98.4	98.4	98.4	98.7	98.7	98.9	99.1
≥ 400		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.7	98.[illegible]	98.4	98.4	98.4	98.7	98.7	99.[illegible]	99.[illegible]
≥ 300		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.7	98.[illegible]	98.4	98.4	98.4	99.[illegible]	99.[illegible]	99.2	99.[illegible]
≥ 200		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.7	98.[illegible]	98.4	98.4	98.4	99.1	99.[illegible]	99.3	99.7
≥ 100		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.7	98.[illegible]	98.4	98.4	98.4	99.1	99.1	99.[illegible]	[illegible]
≥ 0		76.6	84.3	85.[illegible]	94.4	95.1	96.5	97.7	98.[illegible]	98.4	98.4	98.4	99.1	99.[illegible]	99.3[illegible]	[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM [illegible] 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] AG
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] STATION NAME | 68-82,73-80 YEARS | DEC MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible] HOURS (LST)

CEILING (FEET)	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		49.[illegible]	52.5	52.7	57.3	58.1	60.2	62.3	62.6	64.2	64.4	64.4	64.8	64.[illegible]	64.3	65.[illegible]
≥ 20000		52.4	54.0	54.4	59.6	60.4	63.2	64.7	64.9	66.3	66.7	66.7	67.3	67.3	67.3	67.6
≥ 18000		51.5	55.2	55.6	61.1	62.3	65.1	66.6	66.8	68.2	68.6	68.8	69.3	69.3	69.3	69.9
≥ 16000		51.5	55.3	55.8	61.2	62.5	65.2	66.7	67.[illegible]	68.5	69.[illegible]	69.[illegible]	69.6	69.6	69.6	70.1
≥ 14000		52.3	56.2	56.6	62.1	63.3	66.0	67.5	67.8	69.3	69.9	69.9	70.[illegible]4	70.[illegible]4	70.4	71.[illegible]
≥ 12000		52.9	56.7	57.1	62.7	64.0	66.7	68.4	68.6	70.1	70.7	70.7	71.2	71.2	71.2	71.8
≥ 10000		53.7	57.9	58.5	64.7	65.9	68.6	70.3	70.5	72.1	72.6	72.6	73.2	73.2	73.2	73.7
≥ 9000		53.7	57.9	58.5	64.7	65.9	68.6	70.3	70.5	72.1	72.6	72.6	73.2	73.2	73.2	73.7
≥ 8000		55.8	60.3	60.8	67.4	68.6	71.5	73.2	73.4	75.2	75.9	75.9	76.4	76.4	76.4	77.[illegible]
≥ 7000		55.6	61.1	61.6	69.4	69.6	72.5	74.1	74.4	76.2	77.[illegible]	77.[illegible]	77.5	77.5	77.5	78.[illegible]
≥ 6000		56.7	61.2	61.8	69.5	69.7	72.6	74.2	74.5	76.3	77.1	77.1	77.7	77.7	77.7	78.[illegible]
≥ 5000		57.5	62.1	62.6	69.5	70.7	73.6	75.2	75.5	77.3	78.1	78.1	78.6	78.6	78.6	79.[illegible]
≥ 4500		57.7	62.3	63.2	70.0	71.2	74.1	75.8	76.[illegible]	77.8	78.6	78.6	79.2	79.[illegible]	79.2	79.7
≥ 4000		58.[illegible]	63.4	64.5	71.8	73.2	76.0	77.8	78.1	8[illegible].4	81.4	81.4	81.9	81.9	81.9	82.[illegible]
≥ 3500		59.2	64.4	65.6	73.3	74.5	77.5	79.3	79.6	81.9	82.[illegible]	82.9	83.4	83.4	83.4	84.[illegible]
≥ 3000		63.7	69.5	71.0	79.6	80.8	84.1	86.2	86.4	88.8	89.9	89.9	90.[illegible]8	90.[illegible]8	90.8	91.[illegible]
≥ 2500		64.5	70.[illegible]3	71.6	81.1	82.5	85.9	87.9	88.4	90.7	91.8	91.8	92.7	92.7	92.7	93.4
≥ 2000		64.8	70.5	72.1	81.8	83.2	86.7	88.8	89.2	91.5	92.6	92.6	93.6	93.6	93.6	94.[illegible]
≥ 1800		64.8	70.5	72.1	81.9	83.3	86.8	88.9	89.[illegible]	91.6	92.7	92.7	93.7	93.7	93.7	94.4
≥ 1500		64.8	70.5	72.1	82.1	83.4	87.1	89.2	89.6	92.1	93.2	93.2	94.1	94.1	94.1	94.6
≥ 1200		64.8	70.5	72.1	82.1	83.6	87.3	89.3	89.7	92.2	93.3	93.3	94.2	94.2	94.2	94.[illegible]
≥ 1000		64.8	70.5	72.1	82.3	83.8	87.5	89.6	90.[illegible]	92.5	93.7	93.7	94.8	94.8	94.8	95.[illegible]
≥ 900		64.8	70.5	72.1	82.3	83.8	87.5	89.6	90.[illegible]	92.5	93.7	93.7	94.8	94.8	94.8	95.[illegible]
≥ 800		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.1	92.6	93.8	93.[illegible]	94.9	94.9	94.9	95.6
≥ 700		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.1	92.6	93.3	93.8	94.9	94.9	94.9	95.6
≥ 600		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.1	92.6	93.8	93.8	95.1	95.3	95.3	96.[illegible]
≥ 500		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.1	92.6	94.[illegible]	94.[illegible]	95.2	95.5	95.5	96.[illegible]
≥ 400		64.8	70.5	72.1	82.5	84.3	87.7	89.7	90.1	92.6	94.[illegible]	94.[illegible]	95.2	95.5	95.6	96.7
≥ 300		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.1	92.7	94.2	94.2	95.5	95.8	95.9	97.4
≥ 200		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.1	92.7	94.2	94.2	95.6	95.9	96.2	97.9
≥ 100		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.3	92.9	94.4	94.4	95.8	96.[illegible]	96.3	98.4
≥ 0		64.8	70.5	72.1	82.5	84.0	87.7	89.7	90.3	92.9	94.4	94.4	95.8	96.[illegible]	96.4	1[illegible].[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM 10L 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
...ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 (STATION) | IAEGU AB KO (STATION NAME) | 66-69,73-8[illegible] (YEARS) | DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

[illegible]-[illegible] (HOURS LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1¾	≥1½	≥1	≥⅞	≥¾	≥½	≥5/16	≥¼	≥0
NO CEILING		39.[illegible]	43.[illegible]	43.8	52.3	53.1	55.1	57.6	59.4	61.6	63.1	63.2	63.3	64.1	64.3	64.[illegible]
≥ 20000		4[illegible].7	45.4	46.1	55.7	56.8	59.3	62.1	64.1	66.3	68.6	68.7	69.4	69.5	69.8	7[illegible].[illegible]
≥ 18000		47.1	47.1	47.7	57.9	59.[illegible]	6[illegible].5	64.6	66.9	70.4	72.3	72.4	73.1	73.3	73.5	73.9
≥ 16000		47.1	47.1	47.7	57.9	59.[illegible]	61.5	64.6	66.9	70.4	72.3	72.4	73.1	73.3	73.5	73.9
≥ 14000		47.8	47.7	48.4	58.6	59.7	62.1	65.3	67.6	71.2	73.1	73.3	73.9	74.1	74.3	74.[illegible]
≥ 12000		44.0	49.[illegible]	49.7	59.9	61.2	63.8	67.1	69.4	73.[illegible]	74.9	75.[illegible]	75.7	75.9	76.1	76.5
≥ 10000		44.9	49.8	50.8	61.7	63.[illegible]	66.3	69.5	71.9	75.4	77.4	77.5	78.2	78.3	78.6	79.[illegible]
≥ 9000		44.9	49.8	50.8	61.9	63.1	66.4	69.7	72.[illegible]	75.6	77.5	77.6	78.3	78.5	78.7	79.1
≥ 8000		46.1	51.3	52.4	63.5	65.[illegible]	68.6	72.3	74.9	78.6	8[illegible].5	8[illegible].7	81.3	81.5	81.8	82.2
≥ 7000		46.2	51.4	52.5	63.6	65.2	68.7	72.4	75.[illegible]	78.7	8[illegible].7	8[illegible].8	81.5	81.6	81.9	82.3
≥ 6000		46.4	51.7	52.9	64.1	65.6	69.1	72.8	75.4	79.3	81.2	81.3	82.[illegible]	82.2	82.4	82.[illegible]
≥ 5000		47.1	52.5	53.6	65.0	66.5	70.2	74.1	76.[illegible]	8[illegible].9	82.9	83.[illegible]	83.7	83.8	84.1	84.5
≥ 4500		47.2	52.7	53.9	65.2	66.7	70.4	74.3	77.1	81.2	83.1	83.3	84.[illegible]	84.1	84.4	84.[illegible]
≥ 4000		47.5	53.2	54.5	65.8	67.4	71.1	75.0	77.8	82.2	84.2	84.4	85.[illegible]	85.2	85.5	85.[illegible]
≥ 3500		48.0	53.4	55.0	66.4	67.9	71.6	76.0	78.7	83.3	85.3	85.5	86.1	86.3	86.6	87.[illegible]
≥ 3000		49.9	56.7	57.9	70.2	72.[illegible]	76.[illegible]	80.7	83.4	88.3	9[illegible].8	9[illegible].9	91.[illegible]	91.[illegible]	92.[illegible]	[illegible].[illegible]
≥ 2500		50.5	57.2	58.4	70.9	72.8	77.1	81.9	84.8	89.7	92.3	92.5	93.1	93.3	93.6	94.[illegible]
≥ 2000		5[illegible].3	57.5	58.7	71.3	73.3	77.5	82.4	85.3	90.3	93.0	93.1	93.8	94.[illegible]	94.2	94.7
≥ 1800		5[illegible].6	57.5	58.7	71.3	73.3	77.6	82.7	85.6	90.[illegible]	93.3	93.[illegible]	94.1	94.2	94.5	94.9
≥ 1500		5[illegible].8	57.5	58.7	71.6	73.5	77.9	83.0	85.9	90.9	93.7	93.8	94.5	94.7	95.1	95.5
≥ 1200		5[illegible].8	57.5	58.7	71.6	73.7	78.1	83.1	86.0	91.4	94.2	94.4	95.3	95.5	95.9	96.3
≥ 1000		5[illegible].8	57.5	58.7	71.6	73.7	78.1	83.1	86.[illegible]	91.4	94.5	94.7	95.6	95.7	96.2	96.6
≥ 900		50.8	57.5	58.7	71.6	73.7	78.1	83.1	86.[illegible]	91.4	94.5	94.7	95.6	95.7	96.2	96.6
≥ 800		50.8	57.5	58.7	71.6	73.7	78.1	83.1	86.[illegible]	91.5	94.9	95.1	96.2	96.3	96.7	97.1
≥ 700		50.8	57.5	58.7	71.6	73.7	78.1	83.1	86.[illegible]	91.5	94.9	95.1	96.2	96.3	96.7	97.1
≥ 600		50.8	57.5	58.7	71.6	73.7	78.1	83.1	86.[illegible]	91.5	95.1	95.2	96.3	96.4	96.8	97.2
≥ 500		50.8	57.5	58.7	71.6	73.7	78.1	83.1	86.[illegible]	91.5	95.1	95.2	96.6	96.6	97.3	97.8
≥ 400		50.8	57.5	58.7	71.6	73.7	78.1	83.1	86.[illegible]	91.5	95.1	95.2	96.6	96.6	97.3	97.9
≥ 300		50.8	57.5	58.7	71.7	73.8	78.2	83.3	86.1	91.6	95.2	95.3	96.7	97.[illegible]	97.4	98.[illegible]
≥ 200		50.8	57.5	58.7	71.7	73.8	78.2	83.3	86.1	91.6	95.2	95.3	96.7	97.[illegible]	97.4	98.5
≥ 100		50.8	57.5	58.7	71.7	73.8	78.2	83.3	86.1	91.6	95.3	95.5	96.8	97.1	97.5	99.2
≥ 0		50.8	57.5	58.7	71.7	73.8	78.2	83.3	86.1	91.6	95.3	95.5	96.8	97.1	97.5	1[illegible].[illegible]

TOTAL NUMBER OF OBSERVATIONS 7[illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible]TAC
[illegible] ATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 STATION | [illegible] AFB, KS STATION NAME | 68-80, 73-80 YEARS | DEC MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

1200-1400 HOURS LST

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		52.1	55.2	55.6	59.0	59.5	61.4	63.3	63.7	63.9	64.1	64.1	64.1	64.2	64.2	64.2
≥ 20000		55.7	59.1	61.2	63.9	64.4	66.8	69.1	69.6	69.7	70.0	70.0	70.1	70.1	70.1	70.1
≥ 18000		56.1	61.9	63.1	67.6	68.2	70.8	73.2	73.9	74.3	74.6	74.6	74.6	74.7	74.7	74.7
≥ 16000		56.1	61.9	63.1	67.6	68.2	70.8	73.2	73.9	74.3	74.6	74.6	74.6	74.7	74.7	74.7
≥ 14000		56.7	62.6	63.9	68.3	69.1	71.6	74.1	74.8	75.2	75.5	75.5	75.5	75.6	75.6	75.6
≥ 12000		56.4	63.3	64.8	69.3	7 .2	72.8	75.4	76.2	76.6	76.9	76.9	76.9	77.0	77.0	77.0
≥ 10000		60.5	64.5	66.3	71.1	72.2	74.7	77.5	78.5	78.9	79.2	79.2	79.2	79.3	79.3	79.3
≥ 9000		60.5	64.5	66.3	71.1	72.2	74.7	77.5	78.5	78.9	79.2	79.2	79.2	79.3	79.3	79.3
≥ 8000		61.3	65.3	67.2	72.8	74.2	76.9	79.7	80.7	81.1	81.4	81.4	81.4	81.5	81.5	81.5
≥ 7000		61.7	65.9	67.9	73.6	75.2	78.0	80.8	82.8	82.4	82.6	82.6	82.6	82.8	82.8	82.8
≥ 6000		61.9	66.3	68.3	74.3	75.7	78.5	81.4	82.5	82.9	83.1	83.1	83.1	83.3	83.3	83.3
≥ 5000		62.1	66.5	68.6	74.7	76.2	79.2	82.0	83.1	83.7	83.9	83.9	83.9	84.0	84.0	84.0
≥ 4500		62.3	67.0	69.1	75.2	76.9	79.8	82.6	83.9	84.4	84.7	84.7	84.7	84.8	84.8	84.8
≥ 4000		64.4	69.3	71.3	77.8	79.4	82.5	85.4	86.7	87.2	87.5	87.5	87.5	87.6	87.6	87.6
≥ 3500		65.5	70.5	72.7	79.3	81.0	84.2	87.1	88.4	88.9	89.1	89.1	89.1	89.3	89.3	89.3
≥ 3000		65.8	74.2	76.4	83.4	85.2	88.4	91.7	93.1	93.7	94.1	94.1	94.1	94.3	94.3	94.3
≥ 2500		69.6	75.3	77.4	84.7	86.5	89.7	93.0	94.5	95.1	95.4	95.4	95.5	95.7	95.7	95.7
≥ 2000		69.6	75.3	77.4	85.4	87.2	90.4	94.0	95.5	96.4	96.7	96.7	96.8	96.9	96.9	96.9
≥ 1800		69.6	75.4	77.5	85.6	87.4	90.5	94.1	95.7	96.6	97.1	97.1	97.2	97.3	97.3	97.3
≥ 1500		69.6	75.4	77.5	85.8	87.6	90.8	94.5	96.0	97.1	97.6	97.6	97.7	97.8	97.8	97.8
≥ 1200		69.6	75.4	77.5	86.0	87.9	91.1	94.8	96.3	97.4	98.2	98.2	98.3	98.5	98.5	98.5
≥ 1000		69.6	75.4	77.5	86.0	87.9	91.1	94.8	96.3	97.7	98.5	98.5	98.6	98.7	98.7	98.7
≥ 900		69.6	75.4	77.5	86.1	87.9	91.1	94.8	96.3	97.7	98.5	98.5	98.6	98.7	98.7	98.7
≥ 800		69.6	75.5	77.7	86.1	88.0	91.2	94.9	96.4	97.8	98.6	98.6	98.7	98.9	98.9	98.9
≥ 700		69.6	75.5	77.7	86.1	88.0	91.2	94.9	96.4	97.8	98.9	98.9	99.0	99.1	99.1	99.1
≥ 600		69.6	75.5	77.7	86.1	88.1	91.2	94.9	96.4	97.8	98.9	98.9	99.1	99.2	99.2	99.2
≥ 500		69.6	75.5	77.7	86.1	88.0	91.2	94.9	96.4	98.0	99.2	99.2	99.5	99.6	99.6	99.6
≥ 400		69.6	75.5	77.7	86.1	88.0	91.2	94.9	96.4	98.0	99.2	99.2	99.5	99.7	99.7	99.7
≥ 300		69.6	75.5	77.7	86.1	88.0	91.2	94.9	96.4	98.0	99.2	99.2	99.5	99.7	99.7	99.7
≥ 200		69.6	75.5	77.7	86.1	88.0	91.2	94.9	96.4	98.0	99.2	99.2	99.5	99.7	99.7	99.9
≥ 100		69.6	75.5	77.7	86.1	88.0	91.2	94.9	96.4	96.0	99.2	99.2	99.5	99.7	99.7	99.9
≥ 0		69.6	75.5	77.7	86.2	88.1	91.3	95.0	96.6	98.1	99.4	99.4	99.6	99.9	99.9	100.0

TOTAL NUMBER OF OBSERVATIONS 783

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAF ETAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 | FAESO AF KO | 68-69,73-80 | DEC

STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

1500-1700
HOURS (LST)

CEILING FEET	VISIBILITY STATUTE MILES															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		6[illegible].7	61.8	61.8	63.0	63.9	64.8	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0
≥ 20000		66.7	66.4	66.5	69.6	69.6	70.5	70.6	70.6	70.6	70.6	70.6	70.6	70.6	70.5	70.6
≥ 18000		68.1	7[illegible].0	71.1	73.5	73.6	74.6	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 16000		68.1	7[illegible].3	71.1	73.5	73.6	74.6	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7	74.7
≥ 14000		69.2	71.3	71.5	75.[illegible]	75.1	76.[illegible]	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2	76.2
≥ 12000		70.0	72.2	72.5	75.9	76.0	76.9	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5
≥ 10000		71.1	73.5	73.8	77.2	77.3	78.5	79.3	79.3	79.3	79.3	79.3	79.3	79.4	79.4	79.4
≥ 9000		71.1	73.5	73.8	77.2	77.3	78.5	79.3	79.3	79.3	79.3	79.3	79.3	79.4	79.4	79.4
≥ 8000		71.9	74.4	74.7	78.1	78.3	79.4	80.4	80.4	80.4	80.4	80.4	80.4	80.5	80.5	80.5
≥ 7000		72.7	75.4	75.6	79.4	79.7	80.9	81.8	81.8	81.8	81.8	81.8	81.8	81.9	81.9	81.9
≥ 6000		72.7	75.5	75.9	79.7	80.0	81.2	82.1	82.1	82.1	82.1	82.1	82.1	82.2	82.2	82.2
≥ 5000		73.0	76.0	76.4	80.2	80.5	81.7	82.7	82.7	82.7	82.7	82.7	82.7	82.9	82.9	82.9
≥ 4500		73.3	76.3	76.7	80.5	80.8	81.9	83.1	83.1	83.1	83.1	83.1	83.1	83.3	83.3	83.3
≥ 4000		75.9	79.4	79.8	83.8	84.2	85.4	86.6	86.6	86.6	86.6	86.6	86.6	86.7	86.7	86.7
≥ 3500		77.2	80.8	81.2	85.1	85.5	86.7	87.9	87.9	87.9	87.9	87.9	87.9	88.1	88.1	88.1
≥ 3000		82.2	86.2	86.6	91.3	91.8	93.0	94.5	94.5	94.5	94.5	94.5	94.5	94.6	94.6	94.6
≥ 2500		83.5	88.0	88.4	93.3	93.8	95.1	96.6	96.6	96.6	96.6	96.6	96.6	96.7	96.7	96.7
≥ 2000		83.8	88.3	88.7	93.8	94.3	95.7	97.1	97.1	97.1	97.1	97.1	97.1	97.2	97.2	97.2
≥ 1800		84.1	88.5	88.9	94.1	94.6	95.9	97.5	97.5	97.5	97.9	97.9	97.9	98.0	98.0	98.0
≥ 1500		84.1	88.5	88.9	94.3	94.9	96.2	97.9	98.0	98.2	98.6	98.6	98.6	98.7	98.7	98.7
≥ 1200		84.1	88.5	88.9	94.3	94.9	96.2	97.9	98.0	98.2	98.6	98.6	98.8	98.9	98.9	98.9
≥ 1000		84.1	88.5	88.9	94.5	95.0	96.3	98.0	98.3	98.4	98.8	98.8	99.1	99.2	99.2	99.2
≥ 900		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.1	99.1	99.3	99.5	99.5	99.5
≥ 800		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.5	99.6	99.6	99.6
≥ 700		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.5	99.6	99.6	99.6
≥ 600		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.6	99.7	99.7	99.7
≥ 500		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.6	99.7	99.7	99.7
≥ 400		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.6	99.7	99.9	99.9
≥ 300		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.6	99.7	99.9	99.9
≥ 200		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.6	99.7	99.9	99.9
≥ 100		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.7	99.9	100.0	100.0
≥ 0		84.1	88.5	89.1	94.6	95.1	96.4	98.2	98.6	98.7	99.2	99.2	99.7	99.9	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 759

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...TAC
A... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1 | IAEEU AB KO | 68-69,73-80 | DEC
STATION | STATION NAME | YEARS | MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

... 0-2...
HOURS LST

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥⅝	≥½	≥5/16	≥¼	≥0
NO CEILING		62.4	64.4	64.5	65.1	65.1	66.5	66.5	66.5	66.6	66.6	66.6	66.6	66.6	66.8	66.8
≥ 20000		64.9	67.3	67.4	67.9	67.9	69.4	69.4	69.4	69.5	69.5	69.6	69.6	69.6	69.6	69.6
≥ 18000		66.9	69.4	69.5	70.4	70.4	71.9	71.9	71.9	72.0	72.0	72.1	72.1	72.1	72.1	72.1
≥ 16000		66.9	69.4	69.5	70.4	70.4	71.9	71.9	71.9	72.0	72.0	72.1	72.1	72.1	72.1	72.1
≥ 14000		67.5	70.1	70.2	71.2	71.2	72.6	72.6	72.6	72.8	72.8	72.9	72.9	72.9	72.9	72.9
≥ 12000		69.2	72.1	72.1	73.4	73.4	74.9	74.9	74.9	75.1	75.1	75.1	75.1	75.1	75.1	75.1
≥ 10000		73.8	73.6	73.8	75.3	75.3	76.8	77.2	77.2	77.4	77.4	77.5	77.5	77.5	77.5	77.5
≥ 9000		73.8	73.6	73.8	75.3	75.3	76.8	77.2	77.2	77.4	77.4	77.5	77.5	77.5	77.5	77.5
≥ 8000		71.6	74.6	74.9	76.7	76.7	78.3	78.7	78.7	78.9	78.9	79.1	79.1	79.1	79.1	79.1
≥ 7000		71.7	74.7	75.0	77.0	77.0	78.5	78.9	78.9	79.2	79.2	79.3	79.3	79.3	79.3	79.3
≥ 6000		72.0	75.1	75.4	77.6	77.6	79.2	79.6	79.6	79.8	79.8	80.0	80.0	80.0	80.0	80.0
≥ 5000		72.0	75.1	75.4	77.6	77.6	79.2	79.6	79.6	79.8	79.8	80.0	80.0	80.0	80.0	80.0
≥ 4500		72.3	75.5	75.8	78.0	78.0	79.6	80.0	80.0	80.2	80.2	80.4	80.4	80.4	80.4	80.4
≥ 4000		73.0	77.0	77.2	79.5	79.5	81.0	81.5	81.5	81.8	81.8	81.9	81.9	81.9	81.9	81.9
≥ 3500		73.8	77.4	77.6	80.0	80.0	81.5	82.1	82.1	82.3	82.3	82.5	82.5	82.5	82.5	82.5
≥ 3000		83.5	87.7	88.4	91.2	91.2	93.1	93.6	93.6	93.8	93.8	94.0	94.0	94.0	94.0	94.0
≥ 2500		85.3	89.7	90.3	93.2	93.3	95.4	95.9	95.9	96.2	96.5	96.6	96.6	96.6	96.6	96.6
≥ 2000		85.5	89.8	90.4	93.5	93.7	96.5	97.3	97.3	97.5	97.8	97.9	97.9	97.9	97.9	97.9
≥ 1800		85.5	89.8	90.4	93.5	93.7	96.5	97.3	97.4	97.6	97.9	98.0	98.0	98.0	98.0	98.0
≥ 1500		85.5	89.8	90.4	93.6	93.8	96.6	97.4	97.5	98.0	98.3	98.4	98.4	98.6	98.6	98.6
≥ 1200		85.6	89.9	90.6	93.7	94.0	96.7	97.5	98.0	98.6	98.8	99.0	99.2	99.3	99.3	99.3
≥ 1000		85.6	89.9	90.6	93.7	94.0	96.7	97.5	98.0	98.7	99.0	99.1	99.3	99.5	99.5	99.5
≥ 900		85.6	89.9	90.6	93.7	94.0	96.7	97.5	98.0	98.7	99.0	99.1	99.3	99.5	99.5	99.5
≥ 800		85.6	89.9	90.6	93.7	94.0	96.7	97.5	98.0	98.7	99.0	99.1	99.3	99.5	99.5	99.5
≥ 700		85.6	89.9	90.6	93.7	94.1	96.7	97.5	98.0	98.7	99.1	99.2	99.5	99.6	99.6	99.6
≥ 600		85.6	89.9	90.6	93.7	94.1	96.7	97.5	98.0	98.7	99.3	99.5	99.7	99.9	99.9	99.9
≥ 500		85.6	89.9	90.6	93.7	94.0	96.7	97.5	98.0	98.7	99.3	99.5	99.7	99.9	99.9	99.9
≥ 400		85.6	89.9	90.6	93.7	94.0	96.7	97.5	98.0	98.7	99.3	99.5	99.7	99.9	99.9	99.9
≥ 300		85.6	89.9	90.6	93.7	94.0	96.7	97.5	98.0	98.7	99.3	99.5	99.7	99.9	99.9	99.9
≥ 200		85.7	90.1	90.7	93.8	94.1	96.9	97.6	98.2	98.8	99.5	99.6	99.9	100.0	100.0	100.0
≥ 100		85.7	90.1	90.7	93.8	94.1	96.9	97.6	98.2	98.8	99.5	99.6	99.9	100.0	100.0	100.0
≥ 0		85.7	90.1	90.7	93.8	94.1	96.9	97.6	98.2	98.8	99.5	99.6	99.9	100.0	100.0	100.0

TOTAL NUMBER OF OBSERVATIONS 764

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...L CLIMATOLOGY BRANCH
...AFETAC
A... WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

1... (STATION) | IAESU Ab KD (STATION NAME) | 68-69,73-8... (YEARS) | DEC (MONTH)

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

...-2... (HOURS LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥ ...	≥5/16	≥...	≥0
NO CEILING		63.4	65.4	65.4	67.2	67.2	68.5	68.6	68.6	68.6	68.6	68.6	68.7	68.7	68.7	68.7
≥ 20000		64.7	66.7	66.7	68.5	68.5	69.7	69.9	69.9	69.9	69.9	69.9	70.0	70.0	70.0	70.0
≥ 18000		65.7	68.7	68.8	69.7	69.9	71.1	71.2	71.2	71.2	71.2	71.2	71.4	71.4	71.4	71.4
≥ 16000		65.8	68.1	68.1	69.9	70.0	71.2	71.4	71.4	71.4	71.4	71.4	71.5	71.5	71.5	71.5
≥ 14000		66.9	69.1	69.1	70.9	71.3	72.3	72.4	72.4	72.4	72.4	72.4	72.5	72.5	72.5	72.5
≥ 12000		67.6	69.9	69.9	71.9	72.0	73.4	73.5	73.5	73.5	73.5	73.5	73.6	73.6	73.6	73.6
≥ 10000		69.1	71.4	71.4	73.4	73.5	75.0	75.2	75.2	75.2	75.2	75.2	75.3	75.3	75.3	75.3
≥ 9000		69.1	71.4	71.4	73.4	73.5	75.0	75.2	75.2	75.2	75.2	75.2	75.3	75.3	75.3	75.3
≥ 8000		69.9	72.5	72.5	74.9	75.2	76.7	77.0	77.1	77.0	77.0	77.1	77.2	77.2	77.2	77.2
≥ 7000		70.2	72.9	72.9	75.3	75.5	77.0	77.4	77.4	77.4	77.6	77.6	77.7	77.7	77.7	77.7
≥ 6000		73.5	73.5	73.5	76.3	76.5	78.1	78.4	78.4	78.4	78.6	78.6	78.7	78.7	78.7	78.7
≥ 5000		74.7	74.8	74.8	76.9	77.2	78.7	79.1	79.1	79.1	79.2	79.2	79.3	79.3	79.3	79.3
≥ 4500		74.7	74.1	74.1	77.0	77.3	78.8	79.2	79.2	79.2	79.3	79.3	79.4	79.4	79.4	79.4
≥ 4000		72.5	76.2	76.5	79.4	79.7	81.2	81.6	81.6	81.6	81.7	81.7	81.8	81.8	81.8	81.8
≥ 3500		73.5	77.2	77.6	80.5	80.7	82.2	82.6	82.6	82.6	82.7	82.7	82.8	82.8	82.8	82.8
≥ 3000		83.0	87.8	88.7	92.2	92.4	94.1	94.6	94.6	94.6	94.7	94.7	94.8	94.8	94.8	94.8
≥ 2500		83.9	88.8	89.8	93.3	93.6	95.2	96.1	96.1	96.1	96.5	96.5	96.6	96.6	96.6	96.7
≥ 2000		84.7	89.8	90.8	94.8	95.2	97.4	98.4	98.4	98.4	98.7	98.7	98.9	98.9	98.9	99.0
≥ 1800		84.7	89.9	90.9	95.0	95.3	97.5	98.5	98.5	98.5	98.9	98.9	99.0	99.0	99.0	99.1
≥ 1500		84.7	89.9	90.9	95.1	95.5	97.6	98.6	98.6	98.7	99.1	99.1	99.2	99.2	99.2	99.4
≥ 1200		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.4	99.4	99.4	99.5
≥ 1000		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.4	99.4	99.4	99.5
≥ 900		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.4	99.4	99.4	99.5
≥ 800		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.4	99.4	99.4	99.5
≥ 700		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.4	99.4	99.4	99.5
≥ 600		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.6	99.6	99.6	99.7
≥ 500		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.6	99.6	99.6	99.7
≥ 400		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.6	99.6	99.6	99.9
≥ 300		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.6	99.6	99.6	99.9
≥ 200		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.6	99.6	99.6	99.9
≥ 100		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.6	99.6	99.6	99.9
≥ 0		84.7	89.9	90.9	95.1	95.5	97.6	98.7	98.7	98.9	99.2	99.2	99.7	99.7	99.7	100.

TOTAL NUMBER OF OBSERVATIONS 75...

USAF ETAC FORM 0-14-5 (OL A) JUL 64 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

[illegible] CLIMATOLOGY BRANCH
[illegible] TAC
[illegible] WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

[illegible] STATION | FARGO AS ND STATION NAME | 60-69,73-80 YEARS | DEC MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL HOURS LST

CEILING (FEET)	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥0	≥0
NO CEILING		59.[illegible]	59.9	59.2	62.8	63.1	64.6	65.5	65.8	66.3	66.6	66.6	66.5	66.8	66.9	67.[illegible]
≥ 20000		59.5	61.7	62.0	66.0	66.3	68.0	69.0	69.4	69.9	71.2	71.3	71.5	72.5	72.6	73.[illegible]
≥ 18000		60.2	63.6	64.0	68.3	68.8	70.5	71.5	72.[illegible]	72.6	73.[illegible]	73.[illegible]	73.2	73.2	73.3	73.4
≥ 16000		60.2	63.6	64.0	68.3	68.8	70.5	71.6	72.[illegible]	72.7	73.[illegible]	73.1	73.3	73.3	73.3	73.5
≥ 14000		61.0	64.4	64.8	69.2	69.7	71.4	72.4	72.9	73.6	73.9	74.[illegible]	74.2	74.2	74.2	74.4
≥ 12000		61.[illegible]	65.3	65.6	70.3	70.8	72.6	73.7	74.2	74.9	75.2	75.2	75.4	75.5	75.5	75.7
≥ 10000		63.4	67.0	67.6	72.3	72.9	74.8	76.0	76.[illegible]	77.2	77.6	77.6	77.8	77.8	77.9	78.[illegible]
≥ 9000		63.4	67.0	67.6	72.4	72.9	74.8	76.1	76.5	77.2	77.6	77.6	77.8	77.8	77.9	78.[illegible]
≥ 8000		64.5	68.4	68.9	74.0	74.7	76.6	76.3	78.6	79.3	79.7	79.7	79.9	79.9	80.0	80.1
≥ 7000		64.8	68.8	69.4	74.6	75.3	77.3	78.6	79.1	79.9	80.3	80.[illegible]	80.5	80.6	80.6	80.6
≥ 6000		65.1	69.2	69.8	75.1	75.8	77.8	79.2	79.7	80.5	80.9	80.[illegible]	81.1	81.2	81.2	81.3
≥ 5000		65.5	69.7	70.3	75.7	76.5	78.5	79.9	80.4	81.3	81.6	81.7	81.9	81.9	82.[illegible]	82.1
≥ 4500		65.7	70.0	70.6	76.1	76.8	78.8	80.3	80.8	81.7	82.1	82.1	82.3	82.3	82.4	82.5
≥ 4000		67.2	71.9	72.6	78.2	79.0	81.0	82.5	83.1	84.[illegible]	84.4	84.5	84.7	84.7	84.8	84.9
≥ 3500		69.0	72.7	73.5	79.2	80.0	82.0	83.6	84.1	85.1	85.5	85.5	85.7	85.8	85.8	86.[illegible]
≥ 3000		73.8	79.2	80.2	86.7	87.5	89.7	91.4	92.[illegible]	93.1	93.5	93.6	93.8	93.9	93.9	94.1
≥ 2500		74.8	80.4	81.4	88.1	89.3	91.3	93.2	93.9	94.9	95.4	95.5	95.8	95.8	95.9	96.1
≥ 2000		75.2	80.9	81.9	88.9	89.8	92.3	94.3	94.9	96.[illegible]	96.6	96.6	96.9	97.[illegible]	97.[illegible]	97.[illegible]
≥ 1800		75.2	80.9	81.9	89.0	89.9	92.4	94.4	95.1	96.2	96.9	96.9	97.2	97.2	97.3	97.4
≥ 1500		75.3	80.9	81.9	89.1	90.1	92.6	94.7	95.3	96.5	97.2	97.2	97.5	97.6	97.7	97.8
≥ 1200		75.2	81.0	81.9	89.2	90.1	92.7	94.8	95.5	96.7	97.4	97.5	97.9	97.9	98.[illegible]	98.[illegible]
≥ 1000		75.2	81.0	81.9	89.2	90.2	92.7	94.8	95.5	96.9	97.6	97.6	98.1	98.1	98.2	98.4
≥ 900		75.2	81.0	82.0	89.2	90.2	92.8	94.8	95.6	96.9	97.6	97.7	98.1	98.2	98.[illegible]	98.4
≥ 800		75.2	81.0	82.0	89.3	90.2	92.8	94.9	95.6	97.[illegible]	97.8	97.8	98.3	98.3	98.4	98.5
≥ 700		75.2	81.3	82.0	89.3	90.2	92.8	94.9	95.6	97.0	97.8	97.9	98.3	98.4	98.4	98.6
≥ 600		75.3	81.0	82.0	89.3	90.2	92.8	94.9	95.7	97.[illegible]	98.[illegible]	98.[illegible]	98.5	98.6	98.7	98.9
≥ 500		75.2	81.0	82.0	89.3	90.2	92.8	94.9	95.7	97.0	98.0	98.1	98.6	98.7	98.8	99.[illegible]
≥ 400		75.2	81.0	82.0	89.3	90.2	92.8	94.9	95.7	97.0	98.0	98.1	98.6	98.7	98.9	99.[illegible]
≥ 300		75.2	81.0	82.0	89.3	90.3	92.8	94.9	95.7	97.1	98.1	98.1	98.7	98.8	98.9	99.3
≥ 200		75.2	81.0	82.0	89.3	90.3	92.9	94.9	95.7	97.1	98.1	98.1	98.7	98.9	99.[illegible]	99.[illegible]
≥ 100		75.2	81.0	82.0	89.3	90.3	92.9	94.9	95.7	97.1	98.1	98.2	98.8	98.9	99.1	99.[illegible]
≥ 0		75.2	81.0	82.0	89.3	90.3	92.9	95.0	95.7	97.1	98.2	98.2	98.8	99.[illegible]	99.1	[illegible]

TOTAL NUMBER OF OBSERVATIONS [illegible]

USAF ETAC FORM JUL 64 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

...AL CLIMATOLOGY BRANCH
...ETAC
...WEATHER SERVICE/MAC

CEILING VERSUS VISIBILITY

... ...AEDU AS KD 66-70,73-81 ALL
STATION STATION NAME YEARS MONTH

PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

ALL
HOURS (LST)

CEILING FEET	VISIBILITY (STATUTE MILES)															
	≥10	≥6	≥5	≥4	≥3	≥2½	≥2	≥1½	≥1¼	≥1	≥¾	≥½	≥¼	≥5/16	≥¼	≥0
NO CEILING		43.9	46.2	46.5	49.1	49.4	50.2	50.7	50.8	50.9	51.	51.	51.1	51.1	51.1	51.2
≥ 20000		49.6	52.4	52.7	55.6	56.0	56.9	57.4	57.5	57.7	57.8	57.8	57.9	57.9	57.9	58.2
≥ 18000		53.2	56.2	56.6	59.9	60.3	61.2	61.7	61.9	62.1	62.2	62.2	62.3	62.3	62.4	62.4
≥ 16000		53.3	56.4	56.7	60.0	60.5	61.4	61.9	62.1	62.3	62.4	62.4	62.5	62.5	62.5	62.6
≥ 14000		54.3	57.5	57.6	61.2	61.6	62.6	63.1	63.3	63.5	63.6	63.6	63.7	63.7	63.8	63.8
≥ 12000		55.6	58.8	59.2	62.7	63.1	64.1	64.7	64.8	65.1	65.2	65.2	65.3	65.3	65.3	65.4
≥ 10000		57.2	61.7	62.2	65.9	66.4	67.4	68.0	68.	68.4	68.5	68.5	68.6	68.6	68.7	68.7
≥ 9000		58.2	61.9	62.2	65.9	66.4	67.5	68.0	68.2	68.4	68.6	68.6	68.7	68.7	68.7	68.8
≥ 8000		60.2	64.0	64.4	68.4	68.9	7 .0	70.6	70.7	71.0	71.1	71.2	71.2	71.3	71.3	71.4
≥ 7000		61.0	64.8	65.3	69.4	70.0	71.0	71.6	71.8	72.1	72.2	72.2	72.3	72.3	72.3	72.4
≥ 6000		61.3	65.2	65.7	69.8	70.4	71.5	72.1	72.2	72.5	72.6	72.7	72.7	72.8	72.8	72.9
≥ 5000		61.9	66.0	66.5	70.7	71.2	72.3	73.0	73.1	73.4	73.5	73.5	73.6	73.7	73.7	73.8
≥ 4500		62.1	66.1	66.6	70.9	71.4	72.5	73.1	73.3	73.6	73.7	73.7	73.8	73.9	73.9	74.
≥ 4000		64.4	68.7	69.2	73.7	74.3	75.4	76.0	76.2	76.5	76.6	76.6	76.7	76.8	76.8	76.9
≥ 3500		65.6	69.9	70.5	75.1	75.7	76.8	77.4	77.6	77.9	78.	78.1	78.2	78.2	78.2	78.
≥ 3000		72.1	77.3	78.1	83.7	84.4	85.6	86.3	86.5	86.9	87.0	87.1	87.2	87.2	87.2	87.
≥ 2500		74.5	80.3	81.2	87.5	88.3	89.6	90.4	90.6	91.0	91.2	91.2	91.3	91.3	91.4	91.
≥ 2000		75.9	82.2	83.3	90.3	91.2	92.7	93.6	93.8	94.2	94.4	94.5	94.6	94.6	94.6	94.7
≥ 1800		76.2	82.6	83.7	90.9	91.9	93.4	94.3	94.5	94.9	95.2	95.2	95.3	95.3	95.4	95.4
≥ 1500		76.5	83.2	84.4	92.1	93.1	94.8	95.8	96.0	96.5	96.7	96.7	96.9	96.9	96.9	97.
≥ 1200		76.7	83.4	84.6	92.6	93.7	95.4	96.5	96.8	97.3	97.6	97.6	97.8	97.8	97.8	97.9
≥ 1000		76.7	83.5	84.7	92.8	93.9	95.7	96.9	97.2	97.7	98.0	98.1	98.2	98.3	98.3	98.4
≥ 900		76.7	83.5	84.7	92.8	94.0	95.7	96.9	97.3	97.8	98.1	98.1	98.3	98.3	98.4	98.5
≥ 800		76.7	83.5	84.8	93.0	94.2	95.9	97.2	97.5	98.1	98.4	98.4	98.6	98.6	98.7	98.8
≥ 700		76.7	83.6	84.8	93.0	94.2	96.0	97.3	97.6	98.2	98.5	98.5	98.7	98.8	98.8	98.9
≥ 600		76.7	83.6	84.8	93.0	94.3	96.1	97.4	97.7	98.3	98.7	98.7	98.9	98.9	99.0	99.1
≥ 500		76.8	83.6	84.8	93.1	94.3	96.2	97.5	97.9	98.6	98.9	99.	99.2	99.2	99.3	99.4
≥ 400		76.8	83.6	84.8	93.1	94.4	96.2	97.6	98.0	98.6	99.	99.0	99.3	99.3	99.4	99.5
≥ 300		76.8	83.6	84.9	93.1	94.4	96.3	97.6	98.1	98.7	99.	99.1	99.4	99.4	99.5	99.6
≥ 200		76.8	83.6	84.9	93.2	94.5	96.3	97.7	98.1	98.7	99.1	99.2	99.4	99.5	99.6	99.7
≥ 100		76.8	83.6	84.9	93.2	94.5	96.4	97.7	98.1	98.8	99.2	99.3	99.5	99.5	99.6	99.7
≥ 0		76.8	83.6	84.9	93.2	94.5	96.4	97.7	98.1	98.8	99.2	99.3	99.5	99.6	99.6	99.8

TOTAL NUMBER OF OBSERVATIONS 6677

USAF ETAC FORM 0-14-5 (OL A) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART E PSYCHROMETRIC SUMMARIES

In this section are presented various summaries of dry- and wet-bulb temperatures, dew points, and relative humidity. The order and manner of presentations follows:

1. Cumulative percentage frequency of occurrence - derived from daily observations and presented by month and annual for all years combined. These tabulations provide the cumulative percentage frequency to tenths of temperature by 5-degree Fahrenheit increments, plus mean temperature, standard deviations, and total number of observations in three separate tables as follows:

   a. Daily maximum temperatures
   b. Daily minimum temperatures
   c. Daily mean temperatures

   NOTE: Beginning in January 1964, daily maximum and minimum temperatures are routinely selected from hourly observations recorded on surface observing forms or from automated data collections for all Air Force operated stations. For those stations observing less than 24 hours per day, and where maximum and minimum temperatures are required but not recorded, these are also selected from hourly data from as early as January 1949 and later. Please refer to notations on summary pages and Station History for further information on reporting practices of individual stations.

2. Extreme values - derived from daily observations with the extreme value selected for each year and month of record available. An annual (ALL MONTHS) value is selected when all months for a year have valid extremes. Means and standard deviations are computed for months and annual when four or more values are present for any column. Two tables of daily extremes are prepared:

   a. Extreme maximum temperature
   b. Extreme minimum temperature

   NOTE: The following symbols are used in the extreme data blocks:

   (1) * indicates the extreme was selected from a month with one or more days missing.

   (2) # indicates the extreme was selected from a month in which hourly temperatures were available for less than 24 hours for at least one day in the month.

Values for means and standard deviations do not include measurements for incomplete months.

Continued on Reverse

3. Bivariate percentage frequency distribution and computations of dry-bulb versus wet-bulb temperature. This tabulation is derived from hourly observations and is presented by month and annual, all hours and years combined. The following information is provided:

   a. The main body of the summary consists of a bivariate percentage frequency distribution of wet-bulb depression in 17 classes spread horizontally; by 2-degree intervals of dry-bulb temperature spread vertically. Also provided for each of the dry-bulb intervals is the percentage of observations with dry-bulb and wet-bulb temperature combined; and again for dry-bulb, wet-bulb, and dew-point temperatures separately. Total observations for these four items is also provided in two lines at end of each tabulation table, which may be continued on several pages.

      NOTE: A percentage frequency in this table of ".0" represents one or more occurrences amounting to less than .05 percent.

   b. Statistical data for the individual elements of relative humidity, dry-bulb, wet-bulb, and dew-point temperatures are shown in the section at the bottom left of the forms. These consist of the sum of squares (ΣX^2), sums of values (ΣX), means ($\bar{X}$), and standard deviations (σx). The number of observations used in the computation for each element is also shown.

   c. At the lower right of the form are given the mean number of hours of occurrence for six ranges of dry-bulb, wet-bulb, and dew-point temperatures, and total number of hours possible in the period represented. Mean number of hours is shown to tenths and indicates mean number of hours per year in the annual summary, or mean number of hours per month in the tabulation by month.

      NOTE: Wet-bulb temperature usually was not reported prior to 1946. Relative humidity usually was not reported prior to 1949, nor subsequent to June 1958; and was computed by machine methods for observations recorded during these periods. All values of dew-point temperature and relative humidity are with respect to water, unless otherwise indicated.

4. Means and standard deviations - These tabulations are derived from hourly observations and present the mean, standard deviation, and total number of observations for the eight standard 3-hour groups, by month and annual and again at the bottom for all hours combined. Records for all years combined are presented in the following three tables; DRY-BULB TEMPERATURE, WET-BULB TEMPERATURE, and DEW-POINT TEMPERATURE.

5. Cumulative percentage frequency of occurrence of relative humidity - This summary is derived from hourly observations and presents the cumulative percentage frequency of occurrence of relative humidity by increments of 10% classes, plus the mean relative humidity and total number of observations in two tables.

   a. Table 1 is prepared by month and annual, all years combined, with month being the vertical argument.

   b. Table 2 is prepared by month by standard 3-hour groups, with the hour groups being the vertical argument and a separate page for each month. All years are also combined for this summary.

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

STATION	STATION NAME	YEARS	MONTH
[illegible]	TAEGU AB KO	69-73,74-81	JAN

PAGE 1 [illegible]-0200
HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 45		.5	.5	.5														8	8		
47 / 43		.7	1.1		.1													14	14	6	2
[illegible] / 41		.5	.4	.3														9	9	6	6
[illegible] / 39		1.4	1.0	.3	.1													21	20	14	1
3 / 37	.1	1.[illegible]	1.1	.5														20	[illegible]	13	[illegible]
[illegible] / 35		1.6	1.[illegible]	1.[illegible]	.1													27	27	22	4
3 / 33	1.2	1.5	1.4	.7	.1													36	36	31	24
[illegible] / 31	.5	2.1	1.6	.4	.1													35	35	34	22
[illegible] / [illegible]	.3	5.5	[illegible].1	.8														63	63	45	[illegible]2
[illegible] / 27	.5	9.6	3.6	1.4														110	111	71	27
[illegible] / 25	.3	4.5	3.3	1.2														68	69	78	[illegible]7
[illegible] / 23	.3	8.8	7.4	.8														126	127	67	75
[illegible] / 21	.1	3.4	1.5															37	37	[illegible]2	57
[illegible] / 19	.3	3.7	1.4															39	39	[illegible]4	48
[illegible] / 17	.1	4.1	2.3	.5														[illegible]2	52	44	40
[illegible] / 15		3.7	.4															30	30	[illegible]2	45
[illegible] / 13		[illegible].3	.8															23	23	[illegible]8	[illegible]5
1 / 11		.5	.4															7	8	16	41
[illegible] / [illegible]		.4	.1															4	4	10	7[illegible]
[illegible] / 7		.1	[illegible].1															2	2	4	[illegible]9
[illegible] / 5																				1	57
[illegible] / 3																					[illegible]
[illegible] / 1																					5
[illegible] / -1																					13
[illegible] / -3																					[illegible]
[illegible] / -5																					4
[illegible] / -7																					1
[illegible]/-11																					1
-1 /-13																					6
-1 /-15																					[illegible]
[illegible] /-17																					1
[illegible] /-19																					4
TOTAL	3.9	55.8	31.2	8.5	.7													730	[illegible]33	730	[illegible]73

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3585328	49816	68.2	15.966	730							
Dry Bulb	540371	19161	26.1	7.345	733		76.0					[illegible]
Wet Bulb	448753	17311	23.7	7.245	730		81.3					[illegible]
Dew Point	281484	12044	16.5	10.656	730	4.8	88.8					[illegible]

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
AWS 64

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112	TAEGU AB KO	69-70,74-81	JAN	PAGE 1	0300-0500
STATION	STATION NAME	YEARS	MONTH		HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
47/ 53						.1												1	1		
2/ 51					.3													2	2		
47/ 45		.4	.7															8	8		
44/ 43		.4	.3															5	5	7	3
42/ 41		.5	1.1		.1													13	13	8	2
40/ 39		1.2		.1														10	10	6	3
38/ 37	.2	.7	.8	.3														15	15	16	12
36/ 35	.1	1.6	.5	.4														20	20	10	6
34/ 33	1.0	1.8	.5															24	24	33	19
32/ 31	1.0	.8	1.0	.4	.1													24	25	23	24
30/ 29	.4	3.4	1.2	.5	.3													43	44	19	19
28/ 27	1.4	8.4	2.1	.3														88	89	25	21
26/ 25	.8	7.0	2.5															75	75	71	49
24/ 23	.8	9.1	3.8	.7														105	107	67	53
22/ 21	.7	6.4	2.3	.4														72	74	97	41
20/ 19	.7	5.2	1.4															53	53	70	42
18/ 17	.4	4.5	2.2															52	52	68	62
16/ 15		5.1	1.1	.1														46	47	49	51
14/ 13		2.2	1.0															23	23	47	41
12/ 11	.5	2.2	.7															25	25	34	65
10/ 9	.1	1.5	.8															18	18	15	64
8/ 7		.5	.1															5	5	16	68
6/ 5		.3																2	2	9	53
4/ 3																				1	22
2/ 1																					17
0/ -1																					13
-2/ -3																					15
-4/ -5																					8
-6/ -7																					3
-8/ -9																					3
-10/ -11																					3
-12/ -13																					2
-14/ -15																					3
-16/ -17																					3

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | JAN MONTH

PAGE 3 | 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
-20/-19																					2
-22/-21																					2
-28/-27																					1
TOTAL	.3	63.4	24.1	3.3	.8	.1												737			729
																			729		

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3793397	51205	70.2	16.017	729							
Dry Bulb	472001	17737	24.1	7.831	737		80.6					93
Wet Bulb	397111	16051	22.3	7.748	729		82.5					93
Dew Point	258468	11076	15.2	11.130	729	7.7	87.3					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47612 — STATION
TAEGU AB KO — STATION NAME
69-70, 74-81 — YEARS
JAN — MONTH
PAGE 1
0600-0900 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
≥ 51					.1													1	1		
49 / 46			.4															3	3		
47 / 43	.4	.3	.3															7	7	4	3
42 / 41	.3	.5	.8															12	12	7	2
40 / 39		.8	.1															7	7	7	3
38 / 37	.1	.7	.3															8	8	13	9
36 / 35	.3	1.5	.8	.3														21	21	8	8
34 / 33	1.4	1.2	.4	.4														22	22	22	15
32 / 31	.4	1.2	1.1	.5	.1													25	25	11	17
30 / 29	.5	2.9	1.0		.1													33	33	24	21
28 / 27	1.5	5.2	.8	.4														58	61	47	29
26 / 25	.5	5.5	2.0	.1														67	69	59	34
24 / 23	.9	9.4	3.1	.1														108	108	67	43
22 / 21	1.4	6.8	2.9	.1														76	78	86	46
20 / 19	1.1	6.3	1.8	.1														68	68	90	49
18 / 17	1.0	5.9	1.6															62	62	76	61
16 / 15	.3	5.9	1.5															56	56	61	56
14 / 13		3.7	1.2															36	36	59	46
12 / 11	.3	3.3	.7															31	31	49	52
10 / 9		1.2	.3															11	11	14	67
8 / 7	.1	1.2	.4															13	13	16	39
6 / 5	.7	1.1																13	13	12	46
4 / 3		.1																1	1	3	32
2 / 1																				1	22
0 / -1																					19
-2 / -3																					12
-4 / -5																					9
-6 / -7																					5
-8 / -9																					4
-10 / -11																					1
-12 / -15																					4
-16 / -19																					1
-20 / -21																					3
-22 / -23																					1

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JAN 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-73,74-81 — YEARS
JAN — MONTH
PAGE 2
0600-0800 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-24/-25																					1
-26/-27																					1
-30/-31																					1
TOTAL	11.9	64.8	20.8	2.2	.4														.7		732
																		732		732	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3967107	52679	72.0	15.517	732							
Dry Bulb	419732	16630	22.5	7.892	737		82.8					93
Wet Bulb	359090	15170	20.7	7.820	732		84.0					93
Dew Point	237715	10483	14.3	10.946	732	7.9	87.9					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43612 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
JAN — MONTH

0900-1100 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
4 - / 47			.1	.1		.1												3	3			
4 / 45		.7	.6	.7	.1													15	15			
4 / 43		.1	.8	.1														8	8	8	2	
2 / 41	.1	1.3	1.1	.8		.1												25	25	8	7	
/ 39	.4	.4	.6	1.0	.3													19	19	25	6	
/ 37		1.3	.7	1.8	.4													30	30	12	11	
/ 35		1.3	2.1	.7	.6													33	33	18	12	
/ 33	.6	2.3	3.4	1.5	.6													59	6	36	16	
/ 31	.4	3.8	3.5	2.3	1.1													79	79	50	22	
/ 29		4.4	3.8	2.3	.7													79	79	62	41	
/ 27	.8	3.9	4.9	1.5	.1													81	81	73	43	
/ 25	1.0	4.1	3.8	1.1														71	74	92	47	
/ 23	1.1	3.8	4.2	1.1														73	73	92	57	
/ 21	.1	3.8	2.3	.3														46	46	68	51	
/ 19	.3	2.7	2.0	.4														38	38	64	46	
/ 17	.3	2.0	1.4	.1														27	27	37	44	
/ 15	.1	.8	.4															10	11	30	49	
/ 13		.7	.4															8	8	15	56	
/ 11		.6																4	4	10	53	
/ 9		.1																1	1	6	55	
/ 7			.3															2	2	1	37	
/ 5																				2	28	
/ 3																					9	
/ 1																					19	
/ -1																					13	
/ -3																					15	
/ -5																					3	
/ -7																					3	
/ -9																					1	
/ -11																					1	
/ -13																					2	
/ -15																					1	
/ -17																					1	
/ -19																					2	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 | TAEGU AB KO | 69-70,74-81 | JAN

STATION | STATION NAME | YEARS | MONTH

PAGE 1 | 0900-1100

HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-70/-71																					
-1/-27																					
TOTAL	5.3	38.0	36.4	16.0	3.9	.3												711	716	711	711

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3209374	46148	64.9	17.365	711		67.9					93
Dry Bulb	623435	20487	28.6	7.217	716		67.9					93
Wet Bulb	499067	18177	25.6	6.957	711		78.7					93
Dew Point	298763	12421	17.5	10.732	711	5.9	85.9					93

USAFETAC FORM AA 44 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47121 — STATION
TAEGU AB KO — STATION NAME
69-7?,74-81 — YEARS
JAN — MONTH

1230-14?? — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 59						.1												1	1		
[illegible] / 57						.1												1	1		
5[illegible] / 55			.1		.4	.3												6	6		
4/ 53				.1	.4	.3		.1										7	7		
[illegible]2/ 51			.3	.1	.7		.3											10	10	1	
5[illegible] / 49		.3	.1	.8	.5	1.0												20	20	3	
[illegible] / 47		.1	.4	1.1	.5	1.1	.1											25	25	8	3
4[illegible] / 45		.4	1.5	.8	2.6	.8	.1	.1										47	48	15	2
[illegible]4/ 43		.5	.4	1.0	1.9	.7	.1											34	34	26	6
[illegible]2/ 41			1.2	2.7	3.3	2.5	.7	.1										75	75	22	8
4[illegible] / 39		1.0	.7	2.1	2.2	.8	.1											50	50	23	9
3 / 37	.1	.8	1.4	3.4	2.3	.3												61	61	49	16
[illegible] / 35		.5	3.6	4.4	2.3	.7												84	84	52	21
3[illegible] / 33	.1	1.1	2.7	4.7	1.5	.4												77	79	59	19
[illegible] / 31	.3	1.0	1.6	4.1	1.8													64	65	111	11
[illegible] / 29		.8	1.1	3.3	1.0													45	46	82	29
[illegible] / 27	.1	1.5	2.2	1.8	.3													43	43	77	54
[illegible] / 25		.3	1.8	1.6	.4													30	30	74	52
2[illegible] / 23		.4	2.2	1.8														32	32	38	73
2/ 21			1.6															12	12	34	46
[illegible] / 19		.1	.1	.1														3	3	25	52
1[illegible] / 17			.1															1	1	26	52
1[illegible] / 15			.1															1	1	1	39
1[illegible] / 13																				2	46
1[illegible] / 11																				1	45
1[illegible] / 9																					42
[illegible] / 7																					19
[illegible] / 5																					22
[illegible] / 3																					13
[illegible] / 1																					13
[illegible] / -1																					9
-[illegible] / -3																					7
-[illegible] / -5																					4
-[illegible] / -7																					2

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43812 STATION | TAEGU AB KO STATION NAME | 69-73,74-81 YEARS | JAN MONTH

 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
- / -9																					2
/ -11																					4
-1 / -13																					3
-1 / -15																					1
-1 / -17																					1
- / -19																					1
/ -21																					2
- / -31																					1
TOTAL	.7	8.9	23.2	34.0	22.2	9.1	1.5	.4										729	734	729	729

Element (X)	Σ_R'	Σ_R	$\bar{X}$	σ_R	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	2187239	38051	52.2	16.621	729							
Dry Bulb	1010131	26645	36.3	7.649	734		29.5					93
Wet Bulb	724991	22417	30.8	6.999	729		60.1					93
Dew Point	362543	14027	19.2	11.281	729	4.7	82.0					93

FORM AWS 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | JAN MONTH

 15 0-17 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
≥ / 61								.1										1	1		
/ 59							.1	.1										2	2		
/ 57						.8	.1	.1										8	8		
/ 55					.2			.1										7	7		
/ 53					.4	.4	.1											7	7		
/ 51			.3	.4	.7	.5	1.1	.1										23	23		
/ 49			.1	.5	.7	2.4	.7	.1										34	35	2	
/ 47		.1	.1	.5	2.0	.9												28	28	15	1
/ 45		.8	1.2	.9	2.8	2.0	1.1											66	66	17	1
/ 43		.5	.1	2.1	1.5	1.3		.1										43	47	23	6
/ 41		.4	.5	2.3	3.9	3.6	.7											85	85	37	6
/ 39	.1	.4	1.1	2.9	3.7	1.9	.3											76	78	31	15
/ 37		.8	1.3	3.6	2.1	.8												55	55	55	13
/ 35		.9	2.5	2.7	1.6	.3												60	60	56	22
/ 33	.3	1.1	3.3	3.1	1.6													70	71	86	17
/ 31	.5	1.1	1.7	1.9	1.9													53	53	123	31
/ 29		.9	1.5	2.9	.7													45	46	81	33
/ 27	.1	1.1	1.2	1.2	.8													33	34	68	54
/ 25		.3	1.1	1.2	.1													20	21	57	45
/ 23		.4	.9	.9														17	17	23	9
/ 21			.8															6	6	28	46
/ 19			.1															1	1	18	31
/ 17																				11	49
/ 15																				1	4
/ 13																					47
/ 11																					32
/ 9																					38
/ 7																					20
/ 5																					18
/ 3																					13
/ 1																					9
/ -1																					3
/ -3																					5
/ -5																					3

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47812 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | JAN MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
-5/-7																					2
-7/-9																					5
-9/-11																					2
-11/-13																					3
-13/-17																					1
-17/-19																					1
TOTAL	1.1	8.8	18.0	27.1	25.1	14.9	4.1	.9										752	757	752	757

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2174661	38401	51.1	16.869	752							
Dry Bulb	1167305	29141	38.5	7.759	757		21.9					93
Wet Bulb	822393	24363	32.4	6.638	752		50.7					93
Dew Point	403176	15572	20.7	10.367	752	3.0	82.6					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43812 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
JAN — MONTH

1800-2100 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 59							.1											1	1		
/ 57							.1											1	1		
/ 53					.1													1	1		
/ 49				.5														4	4		
/ 47		.1	.1	.1	.5	.1												8	8	1	
/ 45		.8	1.6	1.8	1.2	.1	.1											43	43	5	1
/ 43		.5	1.0	1.3	.1	.1												24	25	12	5
/ 41		.5	1.4	2.5	.8	.1												41	41	16	4
/ 39		1.0	1.8	2.2	1.3													49	49	29	9
/ 37	.3	1.0	2.5	2.5	1.3													56	57	40	16
/ 35	.1	.8	4.5	1.9	1.7	.3												72	72	46	23
/ 33	.5	1.9	3.3	2.8	.6	.3												71	71	71	27
/ 31	.3	1.7	4.3	3.4	1.6													96	87	72	31
/ 29	.3	2.1	3.7	3.2	.8													78	78	72	32
/ 27	.1	1.8	5.2	3.5	.1													83	84	88	73
/ 25		1.3	2.8	.9														39	40	89	44
/ 23		1.8	3.7	1.0	.1													52	53	73	75
/ 21		1.0	2.2	.6														30	30	55	40
/ 19		.8	1.4	.4														20	20	41	55
/ 17		.1	.8	.3														9	9	29	47
/ 15	.1	.4	.3															6	6	13	46
/ 13																				2	50
/ 11																				5	43
/ 9																					38
/ 7																					27
/ 5																					36
/ 3																					16
/ 1																					18
/ -1																					7
/ -3																					9
/ -5																					5
/ -7																					4
/ -9																					2
/ -11																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 84 — REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-79,74-81 — YEARS
JAN — MONTH
PAGE 2
1800-2700 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-1 /-13																					2
-1 /-15																					1
- /-21																					4
TOTAL	1.7	17.7	40.3	28.9	9.9	1.0	.4												774		774
																		774		774	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2882501	45579	58.9	16.023	774							
Dry Bulb	8687.4	25390	32.6	7.363	780		48.5					9
Wet Bulb	662018	21984	28.4	6.975	774		66.3					9
Dew Point	367214	14630	18.9	10.831	774	4.2	84.5					9

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-81 (YEARS) JAN (MONTH)

 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 47			.1															1	1		
4[illegible] / 45		.7	.8	.9														18	18		
4[illegible] / 43		.1	.9	.1		.1												10	10	7	7
[illegible]2/ 41		.5	.7	.5	.3													15	15	9	4
4[illegible] / 39		1.6	1.6	.3	.1													27	27	15	
3[illegible] / 37	.3	.9	2.5	.7	.1													34	34	21	8
[illegible] / 35	.1	2.2	2.7	.7	.1													45	46	27	16
3[illegible] / 33	.4	2.2	1.8	1.0	.1													43	43	55	26
[illegible]2/ 31	1.2	2.5	3.0	1.7	.3													66	67	46	37
[illegible] / 29	.1	5.5	3.9	1.3	.4													86	87	51	33
2[illegible]/ 27	.4	7.4	5.1	2.1	.3													117	117	93	45
[illegible] / 25	.1	4.3	3.8	2.3	.1													82	82	96	47
2[illegible]/ 23	.3	4.8	5.0	.5														81	82	75	74
2[illegible]/ 21		2.1	3.4	.1														43	44	92	51
[illegible] / 19		2.7	2.2	.7														43	43	65	47
[illegible] / 17		2.2	1.6															29	29	46	47
1[illegible] / 15		.9	.7	.1														13	13	37	5[illegible]
[illegible] / 13	.1	.8	.8															13	13	26	41
1 / 11		.1																1	1	12	35
[illegible] / 9																				4	67
[illegible] / 7																					33
[illegible] / 5																					44
[illegible] / 3																					[illegible]2
[illegible] / 1																					14
[illegible] / -1																					1[illegible]
- / -3																					6
- / -5																					4
- / -7																					4
- [illegible] / -9																					5
-1 / -11																					[illegible]
-1 / -13																					[illegible]
-1 [illegible] / -15																					1
- [illegible] / -17																					3
- [illegible] / -21																					1

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 | TAEGU AB KO | 69-73,74-81 | JAN
STATION | STATION NAME | YEARS | MONTH

PAGE 1 | 2100-2300
HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	2.3	41.6	40.4	13.0	1.8	.1												767	772	767	767

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3479259	50171	65.4	16.056	767							
Dry Bulb	660611	21927	28.4	7.004	772		69.6					9?
Wet Bulb	534843	19536	25.5	6.973	767		76.8					9?
Dew Point	324929	13483	17.6	10.713	767	4.6	86.1					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | JAN MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
/ 61								.0										1	1		
/ 59						.0	.0	.0										4	4		
/ 57						.1	.0	.0										10	10		
5 / 55			.0		.2	.0		.0										13	13		
4/ 53				.0	.1	.1	.0	.0										16	16		
/ 51			.1	.1	.2	.1	.2	.0										36	36	1	
5 / 49		.0	.0	.2	.2	.4	.1	.0										58	59	5	
/ 47		.1	.1	.2	.4	.3	.0											65	65	24	4
/ 45		.5	.9	.7	.8	.4	.2	.0										208	209	37	4
4/ 43	.1	.4	.6	.6	.5	.3	.0	.0										145	146	93	3.
2/ 41	.1	.5	.9	1.1	1.	.8	.2	.0										275	275	115	39
/ 39	.1	1.0	.9	1.1	1.0	.3	.1											260	260	172	42
/ 37	.2	.9	1.3	1.6	.8	.1												289	290	219	96
/ 35	.1	1.3	2.2	1.5	.8	.2												362	363	239	109
3 / 33	.6	1.6	2.1	1.8	.6	.1												402	406	405	163
/ 31	.6	1.8	2.2	1.8	.9													432	436	470	193
/ 29	.2	3.2	2.3	1.8	.5													472	476	436	199
/ 27	.6	4.8	3.1	1.5	.2													613	620	572	366
/ 25	.3	3.4	2.6	1.1	.1													445	450	607	291
/ 23	.6	4.8	3.8	.9	.0													594	599	502	539
2/ 21	.3	2.9	2.0	.2														322	327	542	377
/ 19	.3	2.7	1.3	.2														265	265	453	389
/ 17	.2	2.3	1.2	.1														232	232	337	41
/ 15	.1	2.1	.6	.0														162	164	239	374
/ 13	.3	1.2	.5															103	103	209	362
1 / 11	.1	.8	.2															68	69	127	366
/ 9	.0	.4	.2															34	34	49	441
/ 7	.	.2	.1															22	22	37	221
/ 5	.1	.2																15	15	24	306
/ 3		.1																1	1	9	157
/ 1																				1	107
/ -1																					87
/ -3																					74
/ -5																					4

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47?12 STATION | TAEGU AB KO STATION NAME | 69-72,74-81 YEARS | JAN MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-1/ -7																					25
-8/ -9																					19
-1 /-11																					16
-12/-13																					2?
-14/-15																					14
-16/-17																					10
-1 /-19																					12
-2 /-21																					15
-22/-23																					1
-24/-25																					1
-26/-27																					3
-28/-31																					2
TOTAL	4.4	37.1	29.4	16.7	8.2	3.2	.8	.2										5924	5966	5924	5924

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	25268866	372053	62.8	17.923	5924							
Dry Bulb	5762297	177088	29.7	9.208	5966		475.5					744
Wet Bulb	4448263	155009	26.2	8.138	5924		579.5					744
Dew Point	2534292	103736	17.5	11.008	5924	42.6	682.8					744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
FEB — MONTH

0000-0200 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
4/ 53			.1															1	1		
2/ 51					.1													1	1		
5 / 49			.3	.4														5	5	1	
4 / 47				.3														2	2	2	
4 / 45		.1																1	1	3	3
4/ 43		.6	.3	.3														8	8	4	1
2/ 41	.7	1.5	1.6	.3	.3													30	30	10	7
4 / 39	.3	4.3	1.2	1.3	.1													45	45	14	15
3 / 37		1.3	2.2	.4	.3													29	30	40	11
3/ 35	.4	2.7	1.6	.7	.4													40	40	26	19
3 / 33	.6	4.9	2.5	1.2	.1													63	63	51	28
2/ 31		3.3	4.3	.9	.6													59	59	54	25
3 / 29		3.3	3.4	.7	.6													52	53	52	35
/ 27	.7	7.3	3.3	1.9	.1													88	88	79	49
3/ 25	.4	2.5	2.8	.4														42	42	57	38
2 / 23		8.7	4.3	.6														89	89	57	57
2/ 21	.1	1.8	1.6	.3														26	26	73	46
/ 19		1.8	3.1	.1														34	36	44	30
/ 17	.3	1.3	1.9															24	24	26	35
1 / 15		.9	1.0															13	13	44	53
1 / 13		1.2																8	8	14	41
1 / 11		.7																5	5	11	29
/ 9		.3																2	2	3	38
/ 7																				2	27
/ 5																					34
/ 3																					18
/ 1																					11
/ -1																					17
-3/ -3																					4
-4/ -5																					2
-2/ -7																					1
-2/ -9																					2
-1 /-11																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 (STATION) TAEGU AB KO (STATION NAME) 69-71,74-81 (YEARS) FEB (MONTH)

PAGE 2 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
TOTAL	3.7	48.3	35.2	9.9	2.8														667	671	667	667

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	33121.5	45807	68.7	15.800	667							
Dry Bulb	611672	19614	29.2	7.564	671		55.7					84
Wet Bulb	507424	17700	26.5	7.526	667		65.0					84
Dew Point	334538	13098	19.6	10.776	667	3.4	73.5					84

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

 0300-0500 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
5 / 49		.1	.1															2	2		
-- / 47		.3	.1	.1														4	4	2	
4 / 45		.3	.4															5	5	2	3
4 / 43		.3	.3	.1	.3													7	7	4	1
2 / 41	.3	1.5	1.0	.1														20	20	8	8
4 / 39	.9	3.4	.9	.4	.3													40	40	18	18
3 / 37	.1	1.8	1.6	.3	.4	.1												30	30	37	16
/ 35	.7	2.8	.6	.3														30	30	25	25
3 / 33	.7	3.6	1.6	1.0	.1													48	49	48	2
2 / 31	1.2	4.3	3.3	1.0	.3													68	68	45	24
/ 29		3.4	3.0	.6	.3													49	50	48	36
/ 27	2.1	6.4	3.3	.3														81	84	70	5
/ 25	.4	3.6	2.8	.3														48	49	59	33
/ 23	.3	6.1	5.2															78	78	54	54
2 / 21		4.6	1.5	.1														42	42	62	37
/ 19	.6	3.3	1.8	.3														40	40	64	34
/ 17		2.5	1.2	.1														26	26	33	26
/ 15		2.2	.7															20	21	39	47
/ 13		2.4	1.0															23	23	24	45
/ 11		.9	.3															8	8	18	35
/ 9		.3																2	2	10	45
/ 7		.3																2	2	3	32
/ 5																					45
/ 3																					11
/ 1																					12
/ -1																					14
/ -3																					3
/ -5																					1
/ -7																					1
/ -9																					4
/ -13																					3
/ -17																					1
TOTAL	7.4	54.4	30.9	5.3	1.8	.1												673	680	673	673

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3568477	47841	71.1	15.795	673							
Dry Bulb	571214	18962	27.9	7.907	680		60.9					84
Wet Bulb	481830	17200	25.6	7.929	673		66.0					84
Dew Point	330684	12930	19.2	11.064	673	3.4	73.4					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 69-70,74-81 | FEB

STATION | STATION NAME | YEARS | MONTH

 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
5 / 49			.1															1	1		
4 / 47		.1	.1															2	2	1	
4 / 45		.3	.1															3	3	2	2
4 / 43	.1	.1	.4															5	5	3	1
2 / 41	.4	1.0	1.5	.1														21	21	7	5
4 / 39	1.3	2.6	1.2	.1														36	37	19	16
3 / 37	.1	1.2	.9	.6	.1	.1												21	21	30	14
3 / 35	.3	2.6	.6	.7	.4													32	32	21	15
3 / 33	.3	3.1	1.5	.1														34	35	29	22
2 / 31	.9	3.1	1.5	.3														39	39	48	29
1 / 29	.9	3.5	2.2	.6														49	49	42	37
1 / 27	2.2	7.0	1.5	1.3														82	82	59	39
1 / 25	1.1	3.4	2.2	.3														47	48	57	33
2 / 23	.7	6.9	4.4	.4														85	85	56	49
2 / 21	.7	5.7	2.8															63	65	62	42
1 / 19	.6	4.1	1.0	.4														42	43	66	32
1 / 17	.1	4.1	.7	.1														35	36	52	30
1 / 15	.1	2.8	.3															22	22	41	50
1 / 13	.1	3.1	.3															24	24	32	33
1 / 11		2.2	.7															20	20	22	35
/ 9	.1	1.8																13	13	21	61
/ 7		.4																3	3	9	36
/ 5		.3																2	2	2	37
/ 3																					17
/ 1																					22
/ -1																					15
/ -3																					3
/ -5																					6
/ -7																					3
/ -9																					1
/ -11																					2
/ -13																					1
/ -23																					2

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AWS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | FEB (MONTH)

PAGE 2 | 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
TOTAL	13.3	59.6	24.1	5.3	.6	.1													681	688	681	681

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3746325	49345	72.5	15.849	681							
Dry Bulb	516964	17976	26.1	8.297	688		64.8					64
Wet Bulb	441192	16400	24.1	8.247	681		70.2					64
Dew Point	307124	12240	18.0	11.319	681	4.1	74.7					64

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

PAGE 1 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 57				.2														1	1		
[illegible]/ 53					.2	.2												2	2		
[illegible] / 51						.2												1	1	1	
[illegible] / 49				.3	.3	.3		.2										7	7		
[illegible] / 47	.2	.3	.5	.2	.2	.2												9	9	1	2
[illegible]/ 45		.6	.9	.8	.5	.2												19	19	7	
[illegible]/ 43	.2	.8	.5	.6	.8		.5											21	21	12	4
[illegible]/ 41	.2	2.9	3.3	2.1	1.1	.9												69	70	19	8
[illegible] / 39	.3	1.4	1.8	2.4	1.1	.5												49	49	29	13
[illegible]/ 37	.3	2.0	2.7	2.1	1.5	.3												59	60	45	21
[illegible] / 35	.5	1.7	3.5	2.1	.9	.2												58	58	48	27
[illegible]/ 33	.5	2.4	3.8	1.2	.8													57	57	51	27
[illegible]/ 31	.3	3.2	1.8	2.3	.8													55	56	78	32
[illegible] / 29	.6	2.7	3.5	2.0	.8													63	64	63	30
[illegible] / 27	.2	2.4	3.3	1.5	.5													52	53	55	59
[illegible]/ 25	.3	2.9	2.7	.3														41	41	66	42
[illegible]/ 23	.3	2.6	2.3	1.1														41	41	57	56
[illegible]/ 21	.2	.8	2.3															21	21	46	42
[illegible] / 19		1.1	1.7															18	18	27	38
[illegible]/ 17		.8	.9															11	11	30	36
[illegible] / 15		.5																3	3	14	36
[illegible]/ 13		.3	.3															4	4	4	53
[illegible] / 11			.2															1	1	3	18
[illegible] / 9																				1	36
[illegible] / 7																				1	19
[illegible] / 5																					46
[illegible] / 3																					2
[illegible] / 1																					1
[illegible] / -1																					5
[illegible] / -3																					6
[illegible] / -5																					2
[illegible] / -7																					3
[illegible] / -9																					2
-11 / -13																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43312 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-81 (YEARS) FEB (MONTH)

 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
TOTAL	3.8	29.0	35.8	19.0	9.1	2.7	.5	.2										662	667	662	662

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2894766	42194	63.7	17.630	662							
Dry Bulb	766170	22024	33.0	7.647	667		39.4					64
Wet Bulb	602246	19382	29.3	7.254	662		55.7					64
Dew Point	371080	14004	21.2	10.640	662	2.4	71.1					64

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47312 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
FEB — MONTH

1200-1400 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
4/ 63										.2								1	1		
/61				.3					.2									3	3		
/59						.5	.3	.2										6	6		
/57					.3	.3	.3	.5										9	9		
5/55					.5	.6												7	7	2	
4/53				.2	.6	.8	.2											11	11		
/51				.6	.5	.9	.3											15	15		
5/48		.5	.8	.8	.6	1.2	.9	.6										35	35	8	2
4/47	.2		.8	.2	1.2	1.5	.5		.2									29	29	11	
4/45		1.7	1.5	2.1	2.0	3.5	1.1											78	80	28	
4/43		1.4	1.4	2.7	1.7	3.2	.6	.2										72	73	31	9
2/41	.2	1.8	2.0	2.7	2.4	2.6	.9											83	83	41	23
4/39	.2	1.1	1.2	2.7	2.3	.9	.3											55	55	54	24
3/37		.5	1.8	1.5	.8	.8												35	35	72	23
1/35	.2	.3	1.8	2.3	.9	.8												41	42	62	33
3/33	.3	1.1	2.0	2.4	1.2	.2												47	48	72	18
2/31	.5	1.2	.5	2.1	1.1	.2												36	36	72	31
/29	.2	1.1	1.1	1.7	.9													32	32	49	36
1/27	.3	.3	2.1	2.3	.2													34	35	43	69
/25		.2	.8	1.2														14	14	37	35
2/23			1.8															12	12	36	56
2/21		.3	.3															4	4	20	34
/19		.2	.3															3	3	19	40
1/17			.2															1	1	3	32
1/15			.2															1	1	2	41
/13																				1	40
1/11																				1	22
/9																					25
/7																					26
5/5																					27
/3																					12
/1																					7
/-1																					11
-2/-3																					3

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
-0 / -5																					2
- / -7																					
TOTAL	1.8	11.3	20.2	25.6	16.6	17.5	5.3	1.4	.3	.2								664	670	664	664

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2097818	35186	53.0	18.758	664							
Dry Bulb	1107550	26676	39.8	8.242	670		17.3					84
Wet Bulb	791294	22404	33.7	7.303	664		35.8					84
Dew Point	423862	15200	22.6	11.323	664	2.4	67.3					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Poi
7 / 69						.3												2	2		
4 / 67					.1				.1									2	2		
6/ 65										.1								1	1		
4/ 63						.3	.3											4	4		
/ 61						.1	.4	.3										6	6	1	
/ 59					.4		.7	.7										13	13	2	
/ 57					.1	.1	.3	.3										6	6		
5 / 55					.7	1.5	1.0		.1									23	23		
4/ 53				.3	1.3	.4	1.0	.3										23	23	4	
2/ 51					1.2	1.0	1.0	1.3										31	31	6	
5 / 49		.4	.4		.4	2.5	1.2	.7	.1									40	40	6	
5 / 47			.7	.1	2.1	2.4	1.6	.1										46	49	8	
4 / 45		.9	1.6	1.8	2.7	3.7	1.0	.6										83	55	31	6
4/ 43		2.1	1.3	2.2	2.1	1.6	1.0	.1										71	71	42	4
2/ 41		1.3	1.8	1.9	2.5	2.2	.4											69	69	54	26
4 / 39		1.0	.9	1.3	1.5	1.2	.1											41	42	75	28
3 / 37	.3	.1	2.1	1.5	1.8	.6												43	43	93	19
2/ 35		.4	1.6	.9	1.3	.4												32	32	58	20
3 / 33		.7	1.9	1.6	1.0	.3												37	39	60	21
2/ 31	.1	.6	1.3	1.3	1.9													36	36	67	3
1 / 29	.1	.9	.4	1.3	.3													21	22	38	5
1 / 27	.1	.3	.7	2.1	.4													25	25	46	5
/ 25			.4	.1														4	4	34	4
2 / 23			.9	.1														7	7	15	4
2/ 21		.3	.1															3	3	17	4
/ 19		.1	.4															4	4	13	3
/ 17																				3	3
1 / 15																				3	3
/ 13																					3
1 / 11																					2
/ 9																					3
/ 7																					1
/ 5																					1
/ 3																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 — STATION
TAEGU AB KO — STATION NAME
69-7[illegible],74-81 — YEARS
FEB — MONTH

PAGE [illegible]
15[illegible]-17[illegible] — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/ 3																					2
/ -1																					9
- / -3																					4
- / -5																					5
TOTAL	.7	9.3	16.7	16.7	22.1	13.8	10.4	4.6	.4	.1								675	68[illegible]	675	67[illegible]

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1918212	33746	50.0	18.517	675							
Dry Bulb	1276527	28891	42.4	8.792	682		12.4	.5				6[illegible]
Wet Bulb	[illegible]83977	23913	35.4	7.391	675		29.0					6[illegible]4
Dew Point	453429	15815	23.4	11.090	675	2.2	67.0					6[illegible]4

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | IAEGU AB KO | 69-70,74-81 | FEB

STATION | STATION NAME | YEARS | MONTH

 | 18[illegible]-2[illegible]

HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 67						.1												1	1		
4/ 63							.1											1	1		
[illegible] / 61				.1		.1		.1										3	3		
[illegible] / 59					.1	.3												3	3		
[illegible] / 57							.1	.1										2	2	1	
5[illegible] / 55				.3		.3	.1											5	5	1	
[illegible]4/ 53			.1	.1	.6	.1	.3											9	9	1	
[illegible]/ 51				.4	.7	.1	.1	.1										11	11	2	
9 / 49		.1	.1	.9	.4	.7	.1	.1										18	18	5	[illegible]
[illegible] / 47		.3	.4	.4	.3	.7	.4											18	18	7	
4[illegible] / 45		1.2	.9	1.2	1.9	.7	.6											44	45	14	4[illegible]
[illegible]4/ 43		1.[illegible]	.9	2.4	1.[illegible]	2.6												55	56	[illegible]7	[illegible]
[illegible]2/ 41	.1	2.7	3.3	4.0	3.3	1.0												101	101	30	22
[illegible] / 39	.6	2.0	2.2	2.2	1.7	.1												61	61	47	28
3 / 37	.3	.4	3.0	2.9	2.2	.4												64	64	72	18
[illegible] / 35	.3	.4	3.2	1.4	1.6	.4												51	51	62	24
3[illegible]/ 33	.1	1.3	2.[illegible]	2.3	1.2	.1												49	50	87	31
[illegible]/ 31		1.3	2.0	1.4	1.[illegible]	.1												41	42	63	24
[illegible] / 29	.3	.7	2.0	3.0	.6													46	46	59	43
[illegible]/ 27	.3	1.2	2.6	2.2														43	44	[illegible]2	76
[illegible] / 25		.7	1.4	1.3														24	24	52	43
[illegible]/ 23		.9	1.6	1.0														24	25	42	42
2/ 21		.1	.4	.1														5	5	30	39
[illegible] / 19		.4	.6															7	7	14	43
1[illegible]/ 17		.1	.6															5	5	13	47
1[illegible]/ 15			.4															3	3	6	39
[illegible] / 13		.1																1	1	5	32
1[illegible]/ 11																				3	23
[illegible] / 9																					33
[illegible]/ 7																					17
[illegible]/ 5																					21
[illegible]/ 3																					12
/ 1																					[illegible]
/ -1																					14

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
FEB — MONTH

PAGE 2

1800-2000 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
- / -3																					
-4/ -5																					
-6/ -9																					
TOTAL	2.0	15.1	27.8	27.8	16.5	8.2	2.0	.6											701		695
																		695		695	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2501277	39875	57.4	17.539	695							
Dry Bulb	1021700	26122	37.3	8.306	701		24.2	.1				84
Wet Bulb	760558	22388	32.2	7.532	695		41.0					84
Dew Point	435948	15646	22.5	10.983	695	2.8	67.9					84

USAFETAC FORM AUG 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

PAGE 1 | 21[illegible]-23[illegible] HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 57				.1		.3												3	3		
[illegible] / 55			.1	.1														2	2		
[illegible] / 53			.1															1	1		
[illegible] / 51			.1	.1														2	2	2	
[illegible] / 49				.6														4	4	2	1
[illegible] / 47			.3	.3	.1													5	5	3	1
[illegible] / 45		1.1	.3	.4	.1	.1												15	15	5	3
[illegible] / 43		1.7	1.0	.4	.1													23	23	15	2
[illegible] / 41	.6	2.3	2.6	1.1	.7	.1												52	52	22	19
[illegible] / 39	.1	2.3	2.4	1.8	.7													52	53	24	16
[illegible] / 37	.1	2.6	2.7	1.4	.4													51	51	41	17
[illegible] / 35	.6	2.6	4.5	2.4	.6													75	76	48	<6
[illegible] / 33	.3	3.3	3.7	1.8	.4													67	67	74	34
[illegible] / 31	.1	2.8	3.1	2.1	1.1													66	66	72	28
[illegible] / 29	.3	2.7	2.8	2.3	.4													60	60	68	34
[illegible] / 27	.3	2.1	4.4	3.4														72	74	61	68
[illegible] / 25		1.3	4.0	1.0														44	44	50	50
[illegible] / 23		1.3	4.5	.9														47	47	72	55
2[illegible] / 21		1.3	1.4	.1														20	20	48	40
[illegible] / 19		.9	1.8	.1														20	20	38	<5
[illegible] / 17	.1	.9	.9															13	14	24	24
1[illegible] / 15		.3	.6															6	6	25	35
[illegible] / 13		.6																4	4	5	47
1[illegible] / 11																				5	<8
[illegible] / 9																					51
[illegible] / 7																					<2
[illegible] / 5																					26
[illegible] / 3																					16
[illegible] / 1																					18
[illegible] / -1																					7
[illegible] / -3																					4
[illegible] / -5																					2
[illegible] / -7																					3

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AUG 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-81 (YEARS) FEB (MONTH)

 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	2.6	29.8	41.5	20.7	4.8	.6												704	709	704	704

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≥ 93 F	Total
Rel. Hum.	3148391	45621	64.8	16.528	704							
Dry Bulb	787456	23014	32.5	7.556	709		42.1					84
Wet Bulb	632615	20423	29.0	7.557	704		55.8					84
Dew Point	405466	14956	21.2	11.171	704	1.9	69.6					84

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-81 YEARS | FEB MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
7 / 69						.0												2	2		
6 / 67					.0	.0			.0									3	3		
6 / 65										.0								1	1		
4 / 63						.0	.1			.0								6	6		
2 / 61				.1		.0	.1	.1	.0									12	12	1	
/ 59					.1	.1	.1	.1										22	22	2	
9 / 57				.0	.1	.1	.1	.1										21	21	1	
5 / 55			.0	.1	.1	.3	.1		.0									37	37	3	
4 / 53			.1	.1	.3	.2	.2	.0										47	47	5	2
2 / 51			.0	.1	.3	.3	.2	.2										61	61	11	1
5 / 49		.1	.2	.4	.2	.6	.3	.2	.0									112	112	22	5
9 / 47	.0	.1	.4	.2	.5	.6	.3	.0	.0									117	118	47	6
5 / 45		.8	.7	.8	.9	1.0	.3	.1										248	253	92	24
4 / 43	.0	1.0	.8	1.1	.7	.9	.3	.0										262	264	138	22
2 / 41	.3	1.9	2.1	1.6	1.3	.8	.2											445	446	191	112
/ 39	.5	2.2	1.5	1.5	.9	.3	.1											379	382	280	160
3 / 37	.2	1.2	2.1	1.3	.9	.3												332	334	420	137
/ 35	.4	1.7	2.2	1.4	.8	.2												359	361	350	194
3 / 33	.4	2.5	2.4	1.5	.6	.1												402	408	462	265
/ 31	.4	2.5	2.2	1.4	.8	.0												400	402	499	222
/ 29	.3	2.3	2.3	1.5	.5													372	376	419	307
2 / 27	.8	3.4	2.6	1.9	.1													477	485	465	467
/ 25	.3	1.8	2.2	.6														264	266	412	319
2 / 23	.2	3.3	3.1	.5														383	384	389	417
2 / 21	.1	1.9	1.3	.1														184	186	352	321
/ 19	.1	1.5	1.3	.1														168	171	282	279
/ 17	.1	1.2	.8	.0														115	117	184	263
1 / 15	.0	.8	.4															68	69	174	333
1 / 13	.1	1.0	.2															64	64	85	302
1 / 11		.5	.1															34	34	63	202
/ 9	.0	.3																17	17	35	323
/ 7		.1																5	5	15	197
/ 5		.0																2	2	2	229
/ 3																					105

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-81 (YEARS) FEB (MONTH)

 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 1																					85
/ -1																					92
- / -3																					29
-4/ -5																					25
-6/ -7																					14
-8/ -9																					11
- /-11																					3
-12/-13																					5
- /-17																					1
- 2/-23																					2
TOTAL	4.7	32.1	29.1	16.3	9.3	6.0	2.3	.8	.1	.0								5421	5468	5421	5421

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	23187371	339615	62.6	18.778	5421		316.8	.6				672
Dry Bulb	6659253	183279	33.5	9.715	5468		418.5					672
Wet Bulb	5101136	159810	29.5	8.482	5421							
Dew Point	3062131	113689	21.0	11.183	5421	22.6	564.4					672

USAFETAC FORM AWS 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
MAR — MONTH

0000-0?2C — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 59			.2															1	1		
[illegible] / 57		.3																2	2		
5[illegible] / 55	.2																	1	1	4	1
4/ 53			.2			.3												3	3		3
[illegible]2/ 51		.6	.3	.6	.3													12	12	2	
5 / 49		.2	1.1	.6	.2	.2												14	14	3	2
[illegible]/ 47		1.4	1.2	1.1	.9													30	30	12	2
4[illegible] / 45		1.7	3.1	1.8	.5	.2												47	48	24	9
[illegible]4/ 43		2.1	2.6	2.1	.5													48	48	34	18
[illegible]2/ 41	.0	3.2	4.0	3.2	.5													75	76	47	22
[illegible] / 39	.3	2.3	3.1	1.7	.5													51	51	45	31
3[illegible]/ 37		2.1	5.4	1.5	.8													64	65	58	33
[illegible] / 35		3.1	4.8	2.3	.6													70	71	56	38
3[illegible]/ 33	.2	4.0	3.8	2.6														69	69	85	35
[illegible]2/ 31	.2	2.9	2.0	2.0	.8	.2												52	52	71	39
[illegible] / 29		2.6	1.8	2.5	.6													49	49	61	69
[illegible]/ 27	.2	1.7	2.5	1.5	.2													39	39	47	88
[illegible]/ 25		.8	.9	.6														15	15	38	45
24/ 23		1.1	.5															10	10	42	51
[illegible]2/ 21																				18	24
[illegible] / 19																				5	19
1[illegible]/ 17																			1		24
1[illegible]/ 15																					3[illegible]
1[illegible]/ 13																					19
1[illegible]/ 11																					8
[illegible] / 9																					1[illegible]
[illegible] / 7																					7
[illegible]/ 5																					16
[illegible] / 1																					1
[illegible] / -1																					5
-[illegible]/ -3																					3
TOTAL	1.5	30.1	37.3	24.2	6.1	.8													657		652
																		652		652	

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3213007	44627	68.4	15.601	652							
Dry Bulb	954659	24641	37.5	6.818	657		23.5					93
Wet Bulb	781294	22122	33.9	6.868	652		40.2					93
Dew Point	556651	17903	27.5	9.997	652	1.1	65.3					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
MAR — MONTH

0300-0500 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 57		.3																2	3		
5[illegible] / 55	.3																	2	2	4	3
[illegible]4 / 53						.5												3	3		1
[illegible]2 / 51		.2	.3	.3														5	5		
5[illegible] / 49		.3	.3	.3														6	6	3	
[illegible] / 47	.2	.8	1.1	.5	.5													19	19	6	3
4[illegible] / 45	.5	1.4	2.7	1.7	.3													43	44	20	11
[illegible]4 / 43		1.8	1.4	1.1	.2													29	30	22	5
[illegible]2 / 41	1.2	3.9	2.9	.9														59	59	4[illegible]	31
[illegible] / 39		3.8	2.7	.3														45	45	46	18
3[illegible] / 37	1.1	2.3	2.6	2.0														52	52	55	34
[illegible]6 / 35		3.0	3.0	1.8	.5													55	56	44	41
3[illegible] / 33	.5	4.7	3.5	1.4	.2													67	68	57	34
[illegible] / 31	.3	5.9	3.6	2.[illegible]	.2													79	79	81	50
[illegible] / 29	.6	5.0	2.6	2.1	.3													70	70	79	54
[illegible] / 27	.5	4.4	3.2	2.0														66	67	54	6[illegible]
[illegible] / 25		2.3	1.2	.5														26	26	53	49
[illegible] / 23		2.4	1.1	.5														26	26	51	51
[illegible] / 21		.2	.2															2	2	32	28
[illegible] / 19																				8	33
[illegible] / 17																				2	34
1[illegible] / 15		.3																2	2		22
[illegible] / 13		.2																1	1	3	19
1[illegible] / 11																					12
[illegible] / 9																					1[illegible]
[illegible] / 7																					13
[illegible] / 5																					1[illegible]
[illegible] / 3																					9
[illegible] / 1																					[illegible]
[illegible] / -1																					2
TOTAL	5.0	43.1	32.3	17.1	2.0	.5												659	665	659	659

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3649112	47948	72.8	15.617	659							
Dry Bulb	856907	23397	35.2	7.126	665		38.2					[illegible]
Wet Bulb	719386	21266	32.3	7.096	659		51.2					93
Dew Point	535394	17620	26.7	9.884	659	.3	67.5					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43512 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
MAR — MONTH

0600-0800 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
5 / 55		.8																5	5		
4/ 53			.2															1	1	5	4
3/ 51		.3																2	2	2	1
2 / 49			.2	.3		.3												5	5	1	1
1 / 47		.8	.9			.2												12	13	3	2
0 / 45	.6	1.4	2.4	.6	.2													34	34	17	8
-1/ 43		2.0	2.0	1.4														35	36	19	5
-2/ 41	.5	2.9	3.5	.9	.8													56	56	26	23
-3 / 39	.5	3.2	1.7	.6	.2													40	40	40	27
-4/ 37	1.2	2.1	2.6	.6	.2													44	44	60	26
-5/ 35	.5	3.8	3.5	.3														53	54	36	39
-6/ 33	1.1	4.4	2.4	.8														57	58	70	29
-7/ 31	.9	5.0	3.5	1.8														74	74	64	46
-8 / 29	.8	6.7	3.2	1.2	.2													79	79	68	49
-9 / 27	1.7	5.2	3.2	1.5														76	77	82	82
-10/ 25	.3	3.0	1.5	.9														38	38	57	42
-11/ 23	.3	3.2	.6	.6														31	31	46	69
-12/ 21	.3	.5	1.1															12	12	37	41
-13/ 19																				14	29
-14/ 17		.2	.2															2	2	7	32
-15/ 15																				1	33
-16/ 13		.3																2	2	3	15
-17/ 11																					14
-18/ 9																					5
-19/ 7																					6
-20/ 5																					14
-21/ 3																					6
-22/ 1																					6
-23/ -1																					3
-24/ -3																					1
TOTAL	8.5	45.6	32.5	11.6	1.4	.5												658	663	658	658

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3806580	48984	74.4	15.607	658							
Dry Bulb	806253	22633	34.1	7.127	663		44.2					93
Wet Bulb	687821	20753	31.5	7.117	658		53.6					93
Dew Point	519538	17322	26.3	9.834	658	.6	69.3					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | MAR MONTH

PAGE 1 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
6/ 65					.2		.2		.2									3	3		
3/ 61			.2					.2										2	2		
/ 59				.3	.2	.5	.2											7	7	1	
/ 57					.2	.2	.3		.2									5	5	1	
5/ 55			.3	.5	.8	.5		.3										15	15		1
4/ 53			.3	.5	1.2	.6	.3	.3										21	21	4	1
2/ 51		.2	.3	.6	1.2	.8	.5											23	23	3	1
5/ 49		.5	1.6	2.2	1.6	1.1	.5											47	47	11	
/ 47		.5	2.3	2.2	2.2	1.1												53	53	19	6
4/ 45	.2	1.7	3.4	1.9	3.7	.9												76	78	46	9
4/ 43		1.4	1.4	2.6	1.2	.8	.2											49	49	52	43
2/ 41	.2	2.8	2.8	3.1	2.8	.6	.3											81	81	63	36
/ 39	.3	1.4	2.2	2.8	2.0	.3												58	58	78	42
3/ 37	.2	1.1	3.	3.6	1.2	.8												63	64	66	40
2/ 35	.2	.8	2.2	1.7	.6	.5												38	38	54	44
3/ 33	.2	.3	2.3	1.9	1.1													37	37	64	36
2/ 31		1.2	1.7	.9	1.6													35	35	55	51
/ 29		.8	.2	.5	.6													13	13	46	42
4/ 27		.3	.5	.6														9	9	33	04
2/ 25		.3																2	2	21	32
4/ 23		.2																1	2	13	56
2/ 21			.2															1	1	6	34
/ 19		.2	.2															2	2		29
/ 17			.2															1	1	2	26
1/ 15																				2	12
4/ 13																					15
1/ 11																					17
/ 9																					8
3/ 7																					9
6/ 5																					10
4/ 3																					6
/ 1																					6
/ -1																					3
-4/ -5																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Num.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | MAR MONTH

PAGE 2 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	1.1	13.6	25.1	25.9	22.4	8.6	2.3	.8	.3									642	646	642	642

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2466456	38214	59.5	17.299	642							
Dry Bulb	1184800	27246	42.2	7.435	646		9.4					93
Wet Bulb	898967	23617	36.8	6.861	642		25.8					97
Dew Point	573954	18016	28.1	10.329	642	.6	59.8					93

USAFETAC FORM AIR 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMAR

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAR — MONTH

12[illegible]-14 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Po
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
[illegible]4/ 73									.2									1	1		
/ 71						.2	.2	.2			.3							5	5		
/ 69						.2	.2	.2	.2	.2								5	5		
6/ 67						.2	.2	.2	.5	.3								8	8		
6/ 65						.3			.5	.5								8	8		
4/ 63				.2		.2	.2	.9	.8	.2								15	15		
[illegible]/ 61				.5		.5	.8	.3	.6									17	18	1	
/ 59		.3			.8	.6	2.6	1.6	.9									44	44	2	
/ 57		.2		.3	.5	2.5	1.1	1.1	.3									38	38	1[illegible]	
5[illegible]/ 55			.2	.5	1.4	2.5	1.9	.9	.2									48	50	[illegible]	
4/ 53	.3	.3	.2	.8	1.6	1.2	2.2	.6										46	46	[illegible]	
[illegible]/ 51		.2	1.1	1.4	2.6	1.9	1.1	.5										56	56	22	
5/ 49			.8	1.2	1.6	3.3	1.2	.3										54	54	30	
[illegible]/ 47		.5	.8	.6	2.0	1.7	1.6	.5										49	50	59	
[illegible]/ 45		.8	.5	.9	2.5	1.6	1.1	.5										50	50	81	1
4/ 43	.3	1.2	.3	1.6	2.3	1.7	.9	.2										53	54	70	1
[illegible]2/ 41	.2	1.4	.8	2.3	2.3	2.5	1.4											70	70	69	3
[illegible]/ 39		.2	.2	1.1	1.9	1.6												31	31	62	3
3[illegible]/ 37			.2	.5	1.7	.6												19	19	42	2
[illegible]/ 35		.3		.3	.9	.2												11	12	53	4
3[illegible]/ 33				.5	.5	.2												7	7	37	4
[illegible]2/ 31			.2	.2	.3													4	4	39	3
[illegible]/ 29		.2	.2	.2														3	3	[illegible]8	5
[illegible]/ 27																				14	6
[illegible]/ 25																				7	4
2[illegible]/ 23			.3															2	2	2	4
2/ 21																					[illegible]
[illegible]/ 19																				2	2
[illegible]/ 17																					2
1[illegible]/ 15																					1
[illegible]4/ 13																					1
1 / 11																					
[illegible] / 9																					1
[illegible]/ 7																					1

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMA

47212 — STATION
TAEGU AB KO — STATION NAME
69-79,74-79,81 — YEARS
MAR — MONTH
PAGE — 1200-14 HOURS (L. S.


Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew
-/ 5																					
-/ 2																					
/ 1																					
/ -1																					
- / -3																					
TOTAL	.8	5.4	5.4	12.9	22.5	23.3	16.5	7.8	4.0	1.1	.3								65		6
																		644		644	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Tota
Rel. Hum.	1600361	30077	46.7	17.444	644							
Dry Bulb	1644144	32234	49.6	8.385	650		1.3	2.7	.1			
Wet Bulb	1112559	26371	40.9	7.131	644		13.3					
Dew Point	600221	18337	28.5	11.021	644	.3	58.5					


USAFETAC FORM AM 84 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AD-A113 228 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
TAEGU AB, KOREA. REVISED UNIFORM SUMMARY OF SURFACE WEATHER OBS--ETC(U)
OCT 81

UNCLASSIFIED USAFETAC/DS-81/100 SBI-AD-E850 142 NL

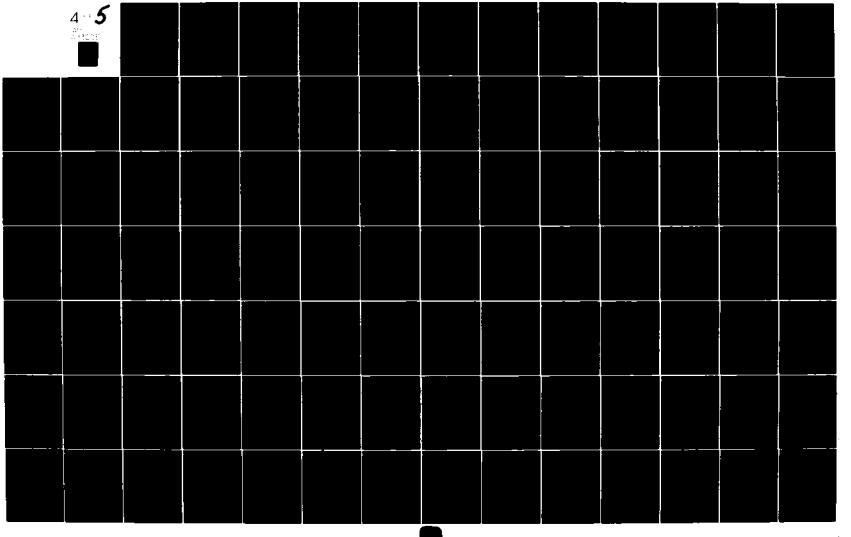

13228

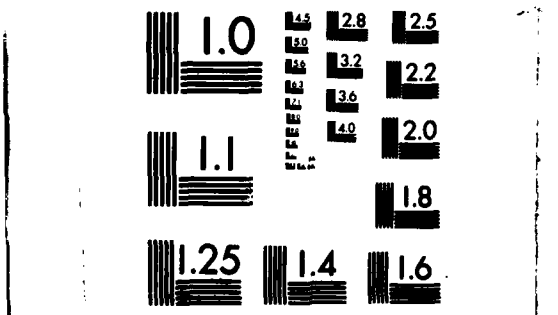

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A.

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | MAR MONTH

PAGE 1 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
6/ 75								.2										1	1		
4/ 73								.5				.3						5	5		
/ 71							.2				.3							3	3		
/ 69						.2	.2		.2	.9	.6							13	13		
6 / 67						.3	.2	.2	.5	.5								10	10		
6/ 65			.2				.6	.2	.9	.5	.2							16	16		
4/ 63	.2					.2	.3	1.1	.9	.3								22	22	1	1
/ 61					.2	.3	1.7	1.1	1.5	.2								32	32	2	
/ 59			.3		1.7	1.8	3.2	2.1	1.4									69	69	6	1
/ 57		.3	.2	.3	.3	1.4	1.8	1.7	.2									40	40	3	
5 / 55		.3	.5	.6	1.1	3.0	1.8	1.4	.5									60	60	5	2
4/ 53				.3	.9	2.1	1.7	1.1										40	43	21	4
2/ 51			1.1	.2	1.5	1.7	1.4	.6										42	42	39	2
5 / 49		.2	.2	1.4	1.8	2.6	1.1	.9										53	53	41	10
/ 47		.5	.3	.6	.9	1.5	1.8	1.1										44	44	68	5
/ 45		1.5	.6	1.2	2.3	1.8	1.4	.2										59	59	78	16
4/ 43	.2	1.1	.5	1.4	1.4	.8	.6	.2										39	39	74	24
2/ 41	.5	.8	.9	1.5	2.0	1.2	2.0											58	58	76	38
/ 39		.2	.8	.8	.9	2.3	.2											33	33	48	28
/ 37			.2	.3	.9	.5												12	12	52	17
/ 35			.2	.5														4	4	49	44
/ 33				.3	.2													3	3	29	55
/ 31	.2	.3	.2															4	4	33	63
/ 29				.2														1	1	31	42
/ 27																				5	78
/ 25				.2														1	1	1	36
/ 23																				1	54
2/ 21																				1	16
/ 19																					2
/ 17																					14
/ 15																					17
/ 13																					1
/ 11																					13
/ 9																					11

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_s	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AWS 0-26-5 (OL A) SUPERSEDES PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAR — MONTH
PAGE 2
1500-1700 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
/ 7																					13
-/ 5																					9
-/ 3																					2
/ 1																					4
/ -1																					2
-/ -3																					1
-/ -5																					1
TOTAL	.9	5.0	5.7	9.5	15.8	21.4	20.2	12.0	5.9	2.3	1.1	.3							667		664
																		664		664	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	1537450	29660	44.7	17.906	664							
Dry Bulb	1833430	34486	51.7	8.699	667		.8	4.5	.8			9
Wet Bulb	1215539	28027	42.2	7.005	664		10.1					9
Dew Point	637884	19280	29.0	10.851	664	.6	58.4					9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAR — MONTH

1630-2000 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
/ 69								.3		.1								3	3		
/67								.3		.3								4	4		
6/ 65					.1		.3	.1										4	4		
4/ 63				.1		.1	.1	1.2	.4	.1								15	15		
2/ 61					.1	.1	.4	.6	.1									10	10		
/ 59			.3	.3	.4	.9	1.6	1.0	.3	.1								34	35	1	
/ 57		.1	.1	.3	.3	.9	1.0	1.0	.1									27	27	2	
5/ 55	.3			.9	.9	1.0	.9	.6										31	31	9	4
4/ 53		.4	.4	.3	1.3	1.3	1.6											37	37	6	
2/ 51		.3	1.2	1.6	1.8	1.5	.9											49	49	16	4
0/ 49	.1	.6	1.3	1.5	1.0	2.8	.9											56	56	32	8
8/ 47		.4	1.2	1.8	2.4	1.9	.4											55	55	50	4
6/ 45		.7	1.6	2.7	2.5	1.5	.6	.3										67	67	64	27
4/ 43	.3	1.9	.7	3.3	1.0	1.6	.4											63	64	77	21
2/ 41	.4	1.0	1.8	3.4	1.8	1.8	.3											71	72	72	41
/ 39	.3	.6	1.0	2.2	1.5	.1	.1											40	40	70	35
8/ 37		.3	1.6	.9	1.5	.7												34	34	61	45
6/ 35		.4	.6	.9	1.8	.4												28	28	49	28
4/ 33		.1	.3	1.5	.9	.1												20	20	50	51
2/ 31		.3		1.5	.3	.1												15	15	36	45
0/ 29			.3	.1	.1													4	4	20	62
8/ 27	.1			.3														3	3	31	75
6/ 25																				20	38
4/ 23																				3	39
2/ 21			.1																1	1	21
/ 19			.1															1	1		26
8/ 17																				1	18
6/ 15																				1	10
4/ 13																					20
2/ 11																					19
0/ 9																					10
8/ 7																					9
6/ 5																					12
4/ 3																					2

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) MAR (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31		Dry Bulb	Wet Bulb	Dew Point
/ 1																					2
/ -1																					1
- / -3																					2
TOTAL	1.6	7.4	12.9	23.7	19.9	17.3	9.8	5.5	1.0	.7									675		672
																		672		672	

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2119236	35726	53.2	18.103	672							
Dry Bulb	1528991	31627	46.9	8.361	675		3.3	1.0				93
Wet Bulb	1094758	26692	39.7	7.175	672		15.6					93
Dew Point	651674	19682	29.3	10.587	672	.4	56.9					93

USAFETAC FORM AWS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | MAR MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31			Dry Bulb	Wet Bulb	Dew Point
[illegible] / 59			.3		.1														3	3		
[illegible] / 57					.1	.1	.1												3	3		
5[illegible] / 55	.4			.4			.3												8	8	5	3
4/ 53		.1	.1		.6	.4	.1												10	11		2
[illegible]2/ 51		.6	.6	.7	1.6	.7	.3												31	32	5	
5 / 49		.4	.6	2.2	1.3	.9													37	37	7	5
[illegible]/ 47		1.2	1.9	2.0	1.7	.9													53	55	16	3
[illegible]/ 45	.3	1.2	4.8	3.6	2.5	.4													88	90	40	15
[illegible]4/ 43		1.2	2.3	3.6	.6														53	55	64	10
[illegible]2/ 41	.7	2.8	5.1	4.7	1.3	.4													103	104	66	23
[illegible]/ 39		.9	4.8	1.2	1.5	.3													59	59	73	44
3[illegible]/ 37		.6	3.1	3.1	1.9														59	59	80	43
[illegible]6/ 35		2.0	3.2	1.9	.4														52	52	69	45
3[illegible]/ 33	.1	.6	2.6	1.5	.9	.3													41	41	60	47
[illegible]2/ 31		.7	1.6	2.5	1.7	.1													46	46	62	64
[illegible]/ 29	.3	.3	1.3	1.3	.6														26	27	45	74
2[illegible]/ 27	.1	.6	.1	.4															9	9	28	71
[illegible]/ 25			.1	.3															3	3	40	40
[illegible]4/ 23			.1																1	1	19	44
2/ 21																					5	20
[illegible]/ 19																					1	16
1[illegible]/ 17		.1																	1	1		28
1[illegible]/ 15																					1	16
[illegible]4/ 13																						22
1[illegible]/ 11																						13
[illegible]/ 9																						11
[illegible]/ 7																						7
[illegible]/ 5																						8
4/ 3																						3
[illegible]/ -1																						7
-[illegible]/ -3																						2
TOTAL	2.0	13.3	32.8	29.4	16.9	4.7	.9													696		686
																			686		686	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2868498	42980	62.7	16.014	686							
Dry Bulb	1214294	28686	41.2	6.784	696		11.6					9[illegible]
Wet Bulb	939247	24963	36.4	6.712	686		27.2					93
Dew Point	630692	19620	28.6	10.076	686	1.2	60.5					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-81 — YEARS
MAR — MONTH
ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible]/ 75								.0										1	1		
74/ 73								.1	.0			.0						6	6		
[illegible]/ 71						.0	.0	.0			.1							8	8		
[illegible]/ 69						.0	.0	.1	.0	.2	.1							21	21		
6[illegible]/ 67						.1	.0	.1	.1	.1								22	22		
[illegible]6/ 65			.0		.0	.0	.1	.0	.2	.1	.0							31	31		
[illegible]4/ 63	.1			.0		.1	.1	.4	.3	.1								52	52	1	1
[illegible]2/ 61			.0	.1	.0	.1	.4	.3	.3	.0								61	62	3	
[illegible]/ 59		.0	.1	.1	.4	.5	.9	.6	.3	.0								158	159	10	1
[illegible]/ 57		.2	.0	.1	.2	.6	.5	.5	.1									117	118	16	2
5[illegible]/ 55	.2	.1	.1	.4	.5	.9	.6	.4	.1									170	172	33	14
[illegible]4/ 53	.0	.1	.2	.2	.7	.8	.7	.2										161	165	44	20
[illegible]2/ 51		.3	.6	.7	1.1	.8	.5	.1										220	221	89	13
5[illegible]/ 49	.0	.3	.7	1.2	.9	1.4	.5	.2										272	272	128	33
[illegible]/ 47	.	.7	1.2	1.1	1.3	.9	.5	.2										315	319	233	30
4[illegible]/ 45	.2	1.3	2.4	1.8	1.8	.8	.4	.1										464	470	372	101
[illegible]4/ 43	.1	1.6	1.4	2.1	.9	.6	.3	.0										369	375	412	113
[illegible]2/ 41	.5	2.3	2.7	2.5	1.4	.8	.5											573	576	459	253
[illegible]/ 39	.2	1.6	2.1	1.3	1.0	.6	.0											357	357	461	259
3[illegible]/ 37	.3	1.1	2.3	1.6	1.0	.3												347	349	474	267
3[illegible]/ 35	.1	1.7	2.2	1.2	.6	.1												311	315	410	319
3[illegible]/ 33	.2	1.8	1.9	1.3	.5	.1												301	303	452	334
[illegible]2/ 31	.2	2.0	1.6	1.4	.6	.1												309	309	441	396
[illegible]/ 29	.2	1.9	1.2	1.0	.3													245	246	378	442
2[illegible]/ 27	.3	1.5	1.2	.8	.1													202	204	294	604
[illegible]/ 25	.0	.8	.5	.3														85	85	237	322
2[illegible]/ 23	.1	.9	.3	.1														71	72	177	405
[illegible]2/ 21	.0	.1	.2															16	16	130	210
[illegible]/ 19		.0	.0															3	3	30	197
1[illegible]/ 17		.0	.0															4	5	12	195
1[illegible]/ 15		.0																2	2	5	155
[illegible]4/ 13		.1																3	3	6	148
1[illegible]/ 11																					99
[illegible]/ 9																					84

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≥ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-81 (YEARS) | MAR (MONTH)

ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
[illegible] / 7																					75
[illegible] / 5																					94
[illegible] / 3																					33
[illegible] / 1																					23
/ -1																					24
- / -3																					1[illegible]
[illegible] / -5																					2
TOTAL	.7	20.4	23.0	19.3	13.4	9.6	6.2	3.3	1.4	.5	.2	.0						5319		5277
																	5277		5277	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	21260700	318216	60.3	19.815	5277							
Dry Bulb	10023478	224950	42.3	9.792	5319		132.2	8.1	1.[illegible]			744
Wet Bulb	7449571	193811	36.7	7.925	5277		236.9					744
Dew Point	4706008	147780	28.0	10.371	5277	5.1	496.0					744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 | DAEGU AB KO | 69-70,74-79,81 | APR
STATION | STATION NAME | YEARS | MONTH

 0000-0200 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 71			.3															2	2		
[illegible] / 69			.2		.3													3	3		
68 / 67		.2	.2															2	2	2	
66 / 65		.2	.2	.2		.2	.2											5	5	3	2
64 / 63		.2	.2	.3		.2		.2										6	6	3	4
62 / 61	.2	.5	.6	.5	.8													16	16	3	2
[illegible] / 59		2.7	1.4	.3	.3	.2	.3											33	33	12	5
[illegible] / 57	.2	1.4	1.3	1.4	.6	.5	.3											36	36	20	18
56 / 55	.5	.9	1.1	2.1	1.3		.2											38	39	25	20
54 / 53	.5	1.3	2.4	2.2	1.4	.8	.2											55	55	25	11
52 / 51	.8	1.4	2.5	2.5	.9	.2												53	53	33	24
50 / 49	.2	3.0	4.4	3.5	2.7	.9												93	93	56	22
48 / 47	.2	1.4	4.9	3.3	1.9	.5												77	77	67	29
46 / 45		3.0	4.3	2.8	2.1	.6												81	81	95	50
44 / 43	.2	1.3	1.6	2.8	1.4													46	46	69	47
42 / 41		2.2	3.2	2.1	.3	.3												51	51	61	65
40 / 39		1.3	.8	.2	.2	.2												16	16	58	57
38 / 37		.2	.8	.6														10	10	50	47
36 / 35		.3	.2															3	3	26	40
34 / 33		.6	.3															6	6	13	38
32 / 31																				10	34
30 / 29																				1	29
28 / 27																					39
26 / 25																					11
24 / 23																					12
22 / 21																					6
20 / 19																					2
18 / 17																					2
16 / 13																					1
TOTAL	2.5	22.0	30.7	24.8	14.2	4.4	1.1	.2											633		632
																		632		632	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3308940	44738	70.8	15.003	632							
Dry Bulb	1590428	31460	49.7	6.521	633			1.0				9
Wet Bulb	1326902	28640	45.3	6.784	632		1.6	.3				9
Dew Point	1066943	25325	40.1	9.090	632		19.4					9

FORM AM 64 0-26-5 (OLA) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) APR (MONTH)

 0300-0500 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
7[illegible]/ 71				.2														1	1		
7 / 69					.5													3	3		
6[illegible]/ 67		.5	.2	.2														5	5		
6/ 65		.2																1	1	6	3
4/ 63		.2	.2	.2	.2													4	4	1	3
[illegible]/ 61	.3	.2	.2	.2														5	5	6	2
/ 59	.2	1.2	.5	.6	.2	.3												19	19	3	4
/ 57	.3	.8	.6	.5	.2													15	15	15	11
5[illegible]/ 55		1.5	.9	.6	.2													21	21	9	9
[illegible]4/ 53	.5	2.6	1.4	2.4		.2												46	47	24	12
[illegible]2/ 51	.9	1.2	3.0	1.1	.3	.3												45	45	37	25
[illegible]/ 49	.2	3.8	3.6	3.3	.9	.2												79	79	35	22
[illegible]/ 47	.6	3.0	3.9	2.3	.6	.3												71	72	64	30
[illegible]/ 45	.3	6.7	6.2	2.3	1.4													111	111	74	55
[illegible]4/ 43		4.1	1.5	1.7	.3	.2												51	51	95	48
[illegible]2/ 41	.3	4.5	3.0	2.9	.5	.3												76	76	79	84
[illegible]/ 39	.2	3.5	1.8	1.4	.2													46	46	43	75
[illegible]/ 37	.2	1.7	1.2	.6	.3													26	26	62	50
[illegible]/ 35		1.1	1.5	.3	.2													20	20	48	43
3[illegible]/ 33		.5	.5	.2														7	7	25	35
2/ 31		.8	.3															7	7	20	42
/ 29		.2																1	1	12	26
[illegible]/ 27																				2	33
[illegible]/ 25																					19
24/ 23																					8
2/ 21																					6
/ 19																					3
[illegible]/ 17																					2
16/ 15																					3
14/ 13																					1
1 / 11																					1
TOTAL	3.8	37.9	30.5	20.6	5.6	1.7													662		660
																		660		660	

Element (X)	$\Sigma_{\chi'}$	Σ_{χ}	$\bar{X}$	σ_{χ}	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3966964	50360	76.3	13.736	660							
Dry Bulb	1481080	30986	46.8	6.818	662		1.1	1.2				9
Wet Bulb	1280093	28699	43.5	6.986	660		4.6					9
Dew Point	1074202	25982	39.4	8.030	660		20.3					9

FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

42212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
APR — MONTH

0600-0800 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
7 / 69		.2																1	1		
6 / 67		.2	.3															3	3	1	
6 / 65		.3		.2														3	3	4	2
4 / 63	.5	.5		.5														9	13	4	7
2 / 61		.5	.2	.2														5	5	4	2
/ 59		2.3	.6	.3	.2													22	23	7	6
/ 57		.9	.5	.8														14	14	16	8
/ 55		1.7	.8	1.1	.2	.2												25	25	11	13
4 / 53	.3	2.4	2.7	.9	.3	.2												45	45	24	16
2 / 51	.6	2.1	3.2	1.4	.2													49	49	30	23
/ 49	.8	2.6	4.6	1.2	.8	.2												66	66	49	20
/ 47	.3	3.2	5.0	1.5	.6		.3											72	72	58	30
/ 45	.9	7.6	4.1	2.6	.9	.3												108	109	87	64
4 / 43	.3	4.4	1.7	1.8	.5													57	57	94	53
2 / 41	.2	5.6	1.8	1.5	.5													63	64	59	95
/ 39		3.0	2.4	1.1	.2	.2												45	46	53	59
3 / 37		2.0	.8	.9														24	24	48	56
/ 35	.2	2.0	1.5	.5														27	27	40	31
3 / 33	.2	.6	.8	.2														11	11	34	36
2 / 31		.2	.3															3	3	21	35
/ 29		.6																4	4	8	27
/ 27																				4	26
/ 25																					20
/ 23																					10
2 / 21																					6
/ 19																					7
/ 17																					1
/ 15																					2
/ 13																					1
TOTAL	4.1	42.8	31.2	16.5	4.1	.9	.3												661		656
																		656		656	

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4107358	51164	78.0	13.358	656							
Dry Bulb	1482924	30964	46.8	7.011	661		1.0	.5				90
Wet Bulb	1291232	28718	43.8	7.208	656		4.5	.1				90
Dew Point	1102104	26240	40.0	8.953	656		18.5					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | APR MONTH

 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible]/ 73			.1		.1		.1											3	3		
[illegible]/ 71						.3	.1	.1	.1									5	5		
[illegible]/ 69			.1	.1		.6	.3	.3	.3	.1								13	13	1	
[illegible]/ 67		.1	.9	.4	.4	.9	.4	.4										25	25	1	1
6/ 65		.4	.7	.7		.6	1.5	.6										31	31	6	[illegible]
[illegible]/ 63		.3	.6	.6	1.[illegible]	3.1	.9	.7	.1									50	50	10	5
[illegible]/ 61			1.3	1.2	3.1	1.3	1.3	.1										57	57	17	6
[illegible]/ 59		1.[illegible]	.9	1.9	3.7	3.[illegible]	.9	.1	.1									79	79	17	10
[illegible]/ 57	.1	.4	.7	1.9	3.4	1.6	1.[illegible]	.4										66	67	34	[illegible]
5[illegible]/ 55		.1	.9	3.3	2.7	1.9	.6	.6	.1									69	69	42	11
[illegible]/ 53		.9	2.1	2.8	3.3	2.1	.4	.1										79	79	71	21
[illegible]/ 51	.1	.7	1.6	2.5	1.[illegible]	1.3	.6											59	59	75	[illegible]
5[illegible]/ 49		.7	2.5	1.8	.9	1.8	.6											56	56	94	33
[illegible]/ 47		1.[illegible]	.7	1.3	1.[illegible]	.4	.3											33	33	80	45
[illegible]/ 45		1.[illegible]	.3	.1	1.[illegible]	.3	.1											20	20	77	86
[illegible]/ 43		.6	.[illegible]	.9	.4	.3												17	17	48	[illegible]2
[illegible]/ 41		.1	.1	.4	.3													7	7	45	[illegible]3
[illegible]/ 39			.1															1	1	[illegible]2	54
3[illegible]/ 37																				19	47
[illegible]/ 35																				10	29
3[illegible]/ 33																				1	29
[illegible]/ 31																					[illegible]2
[illegible]/ 29																					17
[illegible]/ 27																					19
[illegible]/ 25																					13
24/ 23																					14
[illegible]/ 21																					[illegible]
[illegible]/ 19																					4
[illegible]/ 17																					4
1[illegible]/ 15																					[illegible]
TOTAL	.3	7.8	14.3	20.3	23.4	19.7	9.4	3.7	.9	.1								670	671	670	670

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2582722	40208	60.0	15.930	670							
Dry Bulb	2166019	37863	56.4	6.635	671			6.2	.4			9[illegible]
Wet Bulb	1658884	33070	49.4	6.307	670			.3				5
Dew Point	1228357	28027	41.8	9.145	670		13.6	.1				[illegible]

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
APR — MONTH
PAGE 1
1200-1400 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Poin
4/ 83							.2											1	1		
/81				.2								.2						2	2		
/ 79							.2											1	1		
7 / 77						.3	.2		.6	.5	.5	.5	.2					17	17		
6/ 75				.2	.5	.3	1.1		1.2	.6	.3	.2						28	28	1	
4/ 73				.2	.2	.3	1.2	1.1	.9	.9	.6	.3						37	38	1	
/ 71			.2		.8	.3	1.2	1.4	1.4	.3	.2							37	37	1	1
/ 69			.2	.6	.5	.8	.8	.8	.3	1.4	.2	.2						36	36		
/ 67			.3	.3	.3	1.4	.9	2.6	1.7	.9	.5							58	59	9	
6/ 65			.8	.6	.6	1.2	2.4	1.4	1.4	.5								58	58	6	
4/ 63		.5	.8	1.2	.5	3.5	2.4	2.1	.9	.5								81	81	23	6
/ 61			.2	.5	1.1	1.1	1.8	1.2	1.1	.3								47	47	27	6
/ 59		1.4	.3	1.4	1.7	2.7	2.7	3.0	1.1	.3								96	97	51	22
/ 57	.2	.2	.8	.3	.6	1.8	1.8	.5	.3									42	42	62	21
/ 55	.2	.5	.3	.8	.8	1.4	1.2	.5	.2									37	38	57	16
4/ 53	.2	.5		2.0	1.1	.5	.8	.2										33	33	84	15
2/ 51	.2	.6	.5	.8	.3	.3	.5											20	20	77	33
/ 49		.5	.3	.2	.9	.3	.3											16	16	67	33
/ 47		.3		.2	.5	.2	.6											11	12	74	40
/ 45		.3			.3													4	4	96	5
4/ 43		.2		.2														2	2	32	49
2/ 41		.3																2	2	19	72
/ 39																				12	43
/ 37																				5	40
/ 35																					30
/ 33																					41
2/ 31																					35
/ 29																					19
/ 27																					27
/ 25																					20
/ 23																					12
2/ 21																					5
/ 19																					4
/ 17																					6

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AWS 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) | TAEGU AB KO (STATION NAME) | 69-73,74-79,81 (YEARS) | APR (MONTH)

 1200-1400 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
12 / 13																					1 / 3
TOTAL	.6	5.0	4.4	9.2	10.2	16.1	20.0	14.4	10.8	6.0	2.1	1.2	.2					666	671	666	666

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	176623	32065	48.1	18.057	666							
Dry Bulb	2707313	42321	63.1	7.537	671			29.4	11.7	.4		9
Wet Bulb	1853356	34874	52.4	6.400	666			1.6	.3			9
Dew Point	1216810	27636	41.5	10.263	666		17.8	.4				9

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 69-70,74-79,81 | APR

STATION | STATION NAME | YEARS | MONTH

 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 83						.2												1	1		
/ 81						.3		.3		.3	.6	.3	.8					17	17		
/ 79						.3	.3	.3	.6	.2	.6							15	15		
7 / 77						.5		.9	.9	.6	.5	.6	.5					29	29		
6 / 75				.2	.2	.8	.5	.5	.9	1.4	.6	1.4						41	41		
4 / 73					.2	.2	.5	.6	.8	1.4	.3	.2						26	26	2	
2 / 71				.2	1.2	.5	1.5	.8	1.1	2.4	.5	.2	.3					56	56	1	
/ 69			.5	.2	1.1	1.5	.8	1.4	1.2	1.7	.3							56	56	5	1
8 / 67		.2	.8	.5	.3	1.2	1.4	1.8	1.8	.8	.3							59	59	10	2
6 / 65			.2	.5	.2	.8	2.9	1.8	1.7	1.1	.2							60	61	13	4
4 / 63		.2	.3	.6	.3	.9	2.0	2.0	1.1	.3								50	50	33	9
2 / 61			.3	.8	1.4	1.5	1.7	.8	.6	.2								47	47	37	12
0 / 59	.2	.8	.5	.6	1.7	1.2	1.8	2.0	.8	.5								65	65	49	20
8 / 57	.5	.5	.6	.6	.3	.3	1.1	1.2	.3									35	35	58	18
5 / 55		.6	.3	.6	.6	.8	.5	.6										26	27	69	11
4 / 53	.2	.8	.9	1.7	.5	.3	.9	.2										35	35	99	31
2 / 51		.5	1.2	.2	.3	.9	.5											23	23	79	31
0 / 49		.2	.8	.2		.5												10	10	59	43
/ 47		.3	.2	.2	.2		.5											8	8	61	29
6 / 45					.2													1	1	36	61
4 / 43				.2														1	1	22	54
2 / 41		.2	.2															2	2	19	62
0 / 39		.3		.2														3	3	7	45
8 / 37																				5	37
6 / 35																				1	32
4 / 33																				1	31
2 / 31																					34
/ 29																					17
8 / 27																					41
6 / 25																					14
4 / 23																					11
2 / 21																					7
0 / 17																					2
18 / 15																					3

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47?12 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | APR MONTH

1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-/ 13																					1
1 / 11																					1
/ 9																					1
/ 7																					1
TOTAL	.9	4.2	6.5	6.9	8.3	12.3	16.4	14.9	11.6	10.5	3.8	2.6	1.5					666	668	666	666

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≥ 93 F	Total
Rel. Hum.	1694886	31048	46.6	19.291	666							
Dry Bulb	2874521	43461	65.1	8.384	668			40.4	17.4	2.7		9
Wet Bulb	1934216	35624	53.5	6.570	666			2.4	.3			9
Dew Point	1250990	27998	42.3	10.547	666		18.0	.4				9

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
ATM WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | APR MONTH

 1600-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
/ 81								.1		.1								2	2		
/ 79									.1	.3	.1	.1						5	5		
7-/ 77						.1	.1		.3	.1	.1	.1						7	7		
76/ 75					.1	.3		.1	.3	.3	.1	.1						10	10		
74/ 73					.1	.4	.7	.6	.6	.3	.4	.1						23	23		
/ 71				.3	.3	.4	.3	.9	.6	.7	.1							25	26		
/ 69			.3	.3	.4	1.6	.4	.4	.7	1.2	.3							39	39	2	
6 / 67			.1	.1	.7	.4	.7	.9	.9	1.0								34	34	1	
6/ 65			.4	1.0	1.0	.6	1.3	2.0	1.5									54	54	8	1
4/ 63	.1	.1	.3	.9	1.0	3.2	1.9	1.6	.9	.3								71	72	15	3
/ 61		.1	.7	.6	.9	2.2	2.0	.9	.7									56	56	35	8
/ 59		1.2	.6	1.5	1.7	2.8	2.8	1.7		.1								85	85	25	14
/ 57		.6	.6	1.7	.9	1.0	1.3	.7	.1	.1								49	49	52	16
5 / 55	.3	.9	.1	1.0	1.6	1.2	1.2		.1									44	44	38	26
4/ 53		1.6	.6	1.7	.7	1.0	1.3	.3										50	50	88	23
2/ 51	.1	1.5	1.7	1.0	1.3	.4	.3	.3										46	47	100	35
5 / 49		.4	1.3	.6	1.2	1.7	.4											39	39	77	32
/ 47		.9	.4		1.0	.6	.1											21	22	82	38
/ 45		.7	.3	.1	.4													11	11	56	59
4/ 43		.3		.4														5	5	37	53
2/ 41		.1	.3		.1	.1												5	5	36	82
/ 39		.3																2	2	15	51
/ 37			.1	.3														3	3	14	4
6/ 35																					32
34/ 33																				3	38
2/ 31																				2	43
/ 29																					27
6/ 27																					34
0/ 25																					8
4/ 23																					12
2/ 21																					1
/ 19																					2
18/ 17																					3
16/ 15																					2

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) TAEGU AB KO (STATION NAME) 69-70,74-79,81 (YEARS) APR (MONTH)

PAGE 2 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
[illegible] 13																				2
1 / 11																				1
TOTAL	.6	8.7	8.0	11.7	13.7	18.2	15.0	10.6	6.9	4.7	1.3	.6					686	690	686	686

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2188185	36523	53.2	18.857	686							
Dry Bulb	2539598	41486	60.1	8.106	690			19.0	6.1	.3		
Wet Bulb	1807071	34931	50.9	6.438	686		.3	.4				
Dew Point	1241052	28440	41.5	9.513	686		17.7					

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | APR MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 71			.3															2	2		
[illegible] / 69		.1	.3		.1	.3	.1			.1								8	8		
[illegible] / 67			.3	.1	.6		.4	.1										11	11	3	
[illegible] / 65			.3	.4	.4	.1	.3	.3		.1								14	14	2	3
4/ 63		.7	.9	.7	.1	1.5	.1	1.[illegible]	.1									36	37	3	1
[illegible] / 61		.9	.6	1.3	.3	.9	1.2	.4										38	39	13	4
[illegible] / 59		1.3	1.5	1.2	2.8	1.5	.9	.3										64	64	23	12
[illegible] / 57		1.2	1.8	2.5	2.8	1.3	.7	.1										71	71	21	20
5 / 55	.1	.6	.6	2.4	3.1	2.5	.4											66	66	09	14
[illegible] / 53	.3	1.0	1.2	3.6	2.2	.9	.7											67	67	51	20
2/ 51	.3	2.5	2.2	4.[illegible]	2.5	.9												84	84	61	31
[illegible] / 49	.1	.4	3.7	1.9	2.7	1.9	.3											75	77	93	32
[illegible] / 47		.9	.9	1.5	1.9	1.3												44	44	87	29
4 / 45		1.9	.9	1.3	2.4	.6	.1											49	49	91	50
[illegible] / 43		.7	.7	.9	.4	.1												20	20	01	71
[illegible] / 41			.3	.4	.1													6	6	52	86
[illegible] / 39		.4	.3	.1	.3													8	8	30	41
[illegible] / 37		.3																2	2	29	49
[illegible] / 35			.3															2	2	11	41
[illegible] / 33			.1															1	1	4	34
[illegible] / 31																				4	44
[illegible] / 29																					28
[illegible] / 27																					21
[illegible] / 25																					19
[illegible] / 23																					8
[illegible] / 21																					5
[illegible] / 19																					1
[illegible] / 17																					2
1 / 15																					2
TOTAL	.9	13.3	17.4	22.8	23.2	14.1	5.5	2.4	.1	.3									672		668
																		668		668	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	2860749	42301	63.3	16.521	668							
Dry Bulb	1989812	36308	54.0	6.471	672			2.8				9
Wet Bulb	1558236	31984	47.9	6.343	668		.5	.4				9
Dew Point	1177700	27388	41.0	9.063	668		17.5					9

USAFETAC FORM AN 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
APR — MONTH
PAGE 1
ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
94/ 93						.0	.0											2	2		
92/ 91				.0		.0		.1		.1	.1	.1	.1					21	21		
90/ 89						.0	.1	.0	.1	.1	.1	.0						21	21		
88/ 87						.1	.0	.1	.2	.2	.1	.2	.1					53	53		
86/ 85				.0	.1	.2	.2	.1	.3	.3	.1	.2						79	79	1	
84/ 83			.0	.0	.1	.1	.3	.3	.3	.3	.2	.1						89	90	3	
82/ 81			.1	.1	.3	.2	.4	.4	.4	.4	.1	.0	.0					128	129	2	1
80/ 79		.0	.2	.2	.4	.6	.3	.4	.3	.6	.1	.0						159	159	6	1
78/ 77		.1	.4	.2	.3	.5	.5	.7	.5	.3	.1							197	198	27	5
76/ 75		.1	.3	.5	.3	.4	1.1	.8	.6	.2	.0							226	227	48	19
74/ 73	.1	.3	.4	.6	.4	1.6	.9	1.0	.4	.1								307	310	92	38
72/ 71	.1	.3	.5	.6	.9	.9	1.0	.4	.3	.1								271	272	142	42
70/ 69	.0	1.5	.8	1.0	1.5	1.5	1.2	.9	.2	.1								463	465	187	93
68/ 67	.2	.7	.8	1.2	1.1	.8	.8	.4	.1	.0								328	329	278	130
66/ 65	.1	.8	.6	1.5	1.3	1.0	.5	.2	.1									326	329	280	120
64/ 63	.2	1.4	1.4	2.2	1.2	.7	.5	.1										410	411	466	149
62/ 61	.4	1.3	2.0	1.7	1.0	.5	.2	.0										379	380	492	229
60/ 59	.2	1.4	2.6	1.6	1.2	.9	.2											434	436	530	237
58/ 57	.1	1.4	2.0	1.3	1.0	.4	.2											337	340	573	277
56/ 55	.2	2.6	2.0	1.2	1.1	.2	.0											355	356	574	485
54/ 53	.1	1.4	.7	1.1	.4	.1												199	199	458	432
52/ 51	.1	1.6	1.1	.9	.2	.1												212	213	370	647
50/ 49	.0	1.1	.7	.4	.1	.0												121	122	240	425
48/ 47	.1	.5	.4	.3	.0													65	65	232	368
46/ 45	.0	.4	.4	.1	.0													52	52	136	281
44/ 43	.0	.2	.2	.0														25	25	81	282
42/ 41		.1	.1															10	10	57	289
40/ 39		.1																5	5	21	190
38/ 37																				6	245
36/ 35																					124
34/ 33																					87
32/ 31																					41
30/ 29																					23
28/ 27																					22

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
APR — MONTH

ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
1[illegible] / 15																					15
[illegible] / 13																					9
1[illegible] / 11																					3
[illegible] / 9																					1
[illegible] / 7																					1
TOTAL	1.7	17.6	17.7	16.5	12.9	11.0	8.6	5.8	3.8	2.7	.9	.5	.2						5328		5304
																		5304		5304	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	22470327	328407	61.9	20.072	5304							
Dry Bulb	16831695	294849	55.3	9.831	5328		2.0	101.6	35.9	3.4		72[illegible]
Wet Bulb	12709990	256540	48.4	7.545	5304		11.4	5.6	.5			72[illegible]
Dew Point	9358158	217036	40.9	9.486	5304		142.7	1.0				72[illegible]

FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43312 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAY — MONTH

0000-0200 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
[illegible]/ 71						.1												1	1		
[illegible]/ 69			.7	.4	.1	.4												12	12		
[illegible]/ 67			.9	.4	1.6	.1	.1	.1										23	23		
[illegible]/ 65		.7	1.5	1.2	1.3	.9	.4	.4										44	45	11	
[illegible]/ 63	.3	1.5	2.7	2.7	1.6	1.5	.3	.1										72	72	17	13
[illegible]/ 61	.1	1.8	2.4	1.2	1.6	.4	.6											55	55	40	13
[illegible]/ 59	.9	4.0	7.0	4.9	2.2	1.9	.1											142	142	58	47
[illegible]/ 57	.3	2.5	3.7	2.4	1.3	.9	.3											77	78	70	38
5 / 55	.3	3.1	4.0	2.7	.9	.4												77	78	92	62
[illegible]/ 53	.4	3.0	3.4	2.1	1.0	.7												72	73	99	63
[illegible]/ 51		1.8	2.8	.6	.3	.4	.1											41	42	86	69
5 / 49	.3	.9	2.7	.6														30	30	79	61
[illegible]/ 47		1.8	.4		.3													17	18	63	54
[illegible]/ 45		.6	.3		.1													7	7	35	82
[illegible]/ 43		.1																1	1	14	48
[illegible]/ 41			.1															1	1	4	49
[illegible]/ 39																				3	18
[illegible]/ 37																				1	12
[illegible]/ 35																					5
[illegible]/ 33																					5
[illegible]/ 31																					0
[illegible]/ 29																					3
[illegible]/ 23																					1
TOTAL	2.7	21.9	32.7	19.2	12.6	8.0	2.1	.7											678		672
																		672		672	

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3837779	49913	74.3	13.945	672							
Dry Bulb	2309299	39403	58.1	5.344	678			4.9				97
Wet Bulb	1948262	36016	53.6	5.176	672							93
Dew Point	1681911	33305	49.6	6.828	672		1.8					95

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAY — MONTH

0300-0500 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
/ 71			.1															1	1		
/ 69			.1															1	1		
/ 67		.1	.9	.3	.1													10	10	1	
6/ 65	.3	1.2	.6	1.0	.6	.1		.1										27	27	11	4
4/ 63	.1	2.4	2.0	2.0	.6	.3	.4	.1										56	57	15	9
/ 61	.1	2.6	2.3	.9	.1													42	42	26	15
/ 59	.4	5.0	4.2	2.3	.6	.4	.1											91	92	55	38
/ 57	.1	4.2	3.9	2.0	1.3	.4												83	84	58	37
/ 55	.4	3.7	4.2	2.2	.6	.3												79	79	70	56
4/ 53	.6	6.6	2.9	1.4	.7	.3	.1											88	88	89	63
/ 51	.6	4.0	4.3	.9	.4	.1	.1											73	74	100	84
/ 49	.7	2.6	3.2	1.4		.4												58	58	79	88
/ 47	.3	2.2	1.3	.3	.3													30	30	75	56
/ 45	.3	3.6	1.3		.1													37	38	53	60
4/ 43		.7	.6															9	9	33	54
2/ 41	.1	.6	.7															10	10	14	61
/ 39																				11	26
/ 37																				5	20
/ 35																					5
/ 33																					7
2/ 31																					5
/ 29																					3
/ 27																					3
/ 23																					1
TOTAL	4.2	39.6	32.5	14.7	5.5	2.4	.9	.3										695	700	695	695

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4552452	55588	80.0	12.380	695							
Dry Bulb	2174364	38804	55.4	5.773	700			1.6				93
Wet Bulb	1913152	36246	52.2	5.736	695			.1				93
Dew Point	1709240	34120	49.1	7.017	695		1.6					93

USAFETAC FORM AIR 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAY — MONTH

0600-0800 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
74/ 73						.1												1	1		
72/ 71				.1		.3		.1										4	4		
70/ 69		.1	.1		.6													6	6		
68/ 67		.1	1.3	.4	.1		.3											16	16	3	
66/ 65	.3	.7	.6	1.0	.3	.1	.1											22	22	13	5
64/ 63	.3	3.0	3.2	2.4	1.6	.7	.3											81	81	16	15
62/ 61		1.8	3.0	1.4	1.3	.3												55	55	40	13
60/ 59		3.4	5.6	4.7	1.3	.7	.1											112	112	44	38
58/ 57	.1	3.8	3.5	1.6	1.3	.1	.1											75	76	68	42
56/ 55	.4	3.9	3.7	2.1	.4	.6												79	79	92	57
54/ 53	.7	3.0	3.0	1.8	.7	.4												68	68	99	64
52/ 51		2.8	3.9	.4	.7													56	57	71	77
50/ 49	.4	1.7	3.4	.7	.4	.1												48	48	80	80
48/ 47	.3	3.0	1.7	.4	.3													40	40	69	61
46/ 45	.1	2.7	.7	.1	.4													29	29	59	82
44/ 43		.8	.4	.1														10	10	31	57
42/ 41		.6	.3															6	6	16	62
40/ 39		.1																1	1	9	19
38/ 37																				5	11
36/ 35																					9
34/ 33																					9
32/ 31																					3
30/ 29																					2
28/ 27																					1
TOTAL	2.7	31.6	34.4	17.3	9.3	3.5	1.0	.1										709	711	709	709

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4394319	55131	77.8	12.316	709							
Dry Bulb	2289168	40110	56.4	6.100	711			3.5	.1			9
Wet Bulb	1990709	37339	52.7	5.856	709			.4				9
Dew Point	1755437	34927	49.3	7.016	709		1.7					9

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47?12 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | MAY MONTH

 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
4/ 83									.1			.1							2	2		
/81							.3	.6	.3	.1	.1								10	10		
/ 79						.3	.1	.4	.3	.6	.4								15	15		
7 / 77						.9	.9	1.0	.3	.6	.1								26	26		
6/ 75					.3	.9	.9	.6	.4	.3	.1								24	24		
4/ 73			.1	.1	.6	.9	2.6	1.6	.7	.6									50	50		
/ 71		.1	.6	.1	2.7	.7	2.7	.9	.6	.3									61	62		
/ 69		.1	.6	1.0	1.9	2.3	.9	1.6	.1	.1									60	60	10	1
/ 67	.1	.4	2.1	2.3	3.	4.3	1.3	1.1	.4	.3									108	108	22	3
6/ 65		.4	1.1	1.9	3.0	1.4	.9	1.6	.7										77	77	31	9
4/ 63		.1	2.0	2.9	3.6	3.1	1.1	.6	.1										95	95	73	18
/ 61		.1	1.7	1.4	1.9	.9	.6	.1	.1										48	48	81	29
/ 59		.9	1.6	2.6	2.0	1.3	.7	.1											64	65	115	44
/ 57		.6	.4	1.1	.7	.1	.1	.1											23	23	108	56
5 / 55	.3	.6	.9	.6	.1	.1	.1	.1											20	20	85	73
4/ 53	.3	.3	.7	.1	.1	.3													13	13	72	77
2/ 51		.4			.1														4	4	57	81
5 / 49		.1																	1	1	32	84
2/ 47																					5	46
8/ 45																					6	65
4/ 43																					4	22
2/ 41																						39
4 / 39																						13
3 / 37																						9
3 / 35																						13
3 / 33																						6
2/ 31																						6
/ 29																						1
2/ 27																						3
/ 25																						2
TOTAL	.7	4.3	11.8	14.1	20.0	17.4	13.1	10.4	4.3	2.9	.9	.1							701	703		701
																					701	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_a	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2625509	41433	59.1	15.883	701							
Dry Bulb	3152505	46871	66.7	6.257	703			47.2	16.9	1.6		93
Wet Bulb	2377459	40673	58.0	5.008	701			4.2				93
Dew Point	1859831	35737	51.0	7.364	701		1.6	.5				93

USAFETAC FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-70,74-79,81 YEARS | MAY MONTH

 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 89											.3	.3						4	4		
[illegible]/ 87										.1	.3	.7	.1	.1				10	10		
6/ 85								.4	.1		.4	.6	.7	.4				19	19		
[illegible]/ 83								.7	.7	.8	.7	.8	.1					28	28		
[illegible] / 81							1.1	.8	1.1	1.5	2.2	1.0	.1					57	58		
[illegible] / 79						.3	.7	1.4	1.5	1.4	1.3	.4						50	50		
7 / 77						.7	2.9	1.4	3.9	2.1	1.4	.4	.1					93	93		
[illegible]/ 75				.1	.1	.4	2.1	2.4	1.8	2.0	1.0	.1						72	72		
[illegible]/ 73				.4	.7	1.5	1.4	1.1	1.8	1.0	.3	.3						61	61		
[illegible]/ 71		.1	.6	.1	1.0	1.1	1.8	1.1	1.1	.8		.4						59	59	7	
[illegible] / 69		.7	.6	.1	1.3	2.0	.8	.8	1.0	1.0	.1							60	60	27	
[illegible]/ 67		.4	.8	1.4	1.1	.6	1.0	1.0	.7		.1							51	51	50	6
6/ 65			1.3	1.0	1.3	.4	1.4	.8	.4									47	47	66	17
[illegible]/ 63			.7	.8	1.1	1.5	.6	.3	.4									39	39	91	25
[illegible]/ 61		.3	1.3	.3	1.3	.1		.3										25	25	135	22
[illegible] / 59		.8	.8	1.1	.4		.1	.3										26	26	100	62
[illegible] / 57		.3	.6	.3														8	9	87	59
5[illegible]/ 55	.1	.4	.3															6	6	59	62
[illegible]/ 53		.1																1	1	68	70
[illegible]/ 51																				23	63
5[illegible] / 49																				6	58
[illegible] / 47																				6	46
[illegible]/ 45																				1	72
[illegible]/ 43																					46
[illegible]/ 41																					45
[illegible] / 39																					34
[illegible]/ 37																					7
[illegible]/ 35																					15
[illegible]/ 33																					7
[illegible]/ 31																					7
[illegible]/ 29																					2
[illegible]/ 27																					7
[illegible]/ 25																					2

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 83 04 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAY — MONTH

1200-1400 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	.1	3.2	6.8	5.7	8.2	8.7	14.0	12.8	14.7	10.8	8.1	5.0	1.3	.6				716	717	716	716

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	1678876	34422	48.1	17.701	716							
Dry Bulb	3859733	52343	73.0	7.337	717			73.3	51.2	18.5		9
Wet Bulb	2621967	43185	60.3	4.918	716			10.9				9
Dew Point	1871113	36145	50.5	8.060	716		2.3	.8				9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAY — MONTH

15[illegible]-17[illegible] — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
4/ 93												.1						1	1		
/ 91											.1	.7						6	6		
/ 89									.1		.3	.6	.4		.1			11	11		
2/ 87									.1	.1	.6	.3	.8	.1	.3			17	17		
6/ 85						.1			.3	1.5	.8	.4	1.4	1.0				40	40		
4/ 83						.1	.1	.7	.7	1.0	1.1	2.7	.6					50	50		
/ 81						.1	1.1	.8	.7	1.7	1.5	1.5	.4					57	57		
/ 79						.7	.4	1.3	1.4	1.3	1.4	.3	.3	.3				52	53		
7 / 77					.4	.8	1.3	2.5	5.1	1.5	2.7	1.7						114	114		
5/ 75				.4	.3	1.0	1.3	1.5	1.0	1.1	1.4	.4						60	60	2	
4/ 73			.1	.1	.1	.6	1.1	.8	1.3	1.0	.4	.4						43	43	1	
/ 71			1.0		.4	.7	1.3	.6	.6	.7								37	37	13	
/ 69		.6	.6	.4	1.3	1.8	1.4	.3	.7	.6	.1							55	56	46	
/ 67				1.3	.6	1.3	.4	.8	.3		.1							34	34	43	8
6/ 65		.4	.4	.7	1.0	.7	.8	.4	.1	.4								36	37	65	15
4/ 63		.7	1.4	1.0	.3	1.4	.4	.1	.6									42	43	109	26
/ 61	.1	.1	1.3	.3	.8													19	19	114	28
/ 59	.3	1.3	1.1	.3	.3													23	23	107	57
/ 57		.7	.7															10	10	77	53
5/ 55		.1	.4															4	4	60	66
4/ 53				.1														1	1	54	57
2/ 51																				9	73
5 / 49																				9	59
/ 47																				3	41
4/ 45																					6
4/ 43																					33
2/ 41																					51
/ 39																					21
3 / 37																					11
/ 35																					15
3 / 33																					11
2/ 31																					4
/ 29																					1
/ 27																					11

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 — STATION
TAEGU AB KO — STATION NAME
69-72,74-79,81 — YEARS
MAY — MONTH

1500-1700 — HOURS (L. S. T.)

Temp (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-/ 23																					2
TOTAL	.4	3.9	7.0	4.6	5.5	9.4	9.7	10.0	12.9	11.0	10.7	9.1	3.9	1.4	.4			712	716	712	712

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	1794326	32992	46.3	19.327	712							
Dry Bulb	4044519	53503	74.7	8.066	716			75.2	58.7	26.6	.1	93
Wet Bulb	2673620	43488	61.1	4.951	712			13.7	.4			93
Dew Point	1874306	36028	50.6	8.490	712		2.4	1.3				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

41212 | TAEGU AB KO | 69-70,74-79,81 | MAY

STATION | STATION NAME | YEARS | MONTH

 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 91												.1						1	1		
[illegible] / 89									.1	.1		.1	.1					4	4		
8/ 87										.1	.3							3	3		
6/ 85								.1		.3	.3		.4					8	8		
[illegible] / 83									.1	.4	.7	.3	.3					13	13		
[illegible] / 81						.1	.3	.8	1.9	.8	1.4	.4	.1					43	43		
/ 79						.7	.3	1.2	.8	.8	1.1	.3	.1					39	39		
7[illegible] / 77				.3	.4	.5	1.8	2.0	1.1	1.4	.7	.4	.1					64	64		
[illegible]6/ 75				.1	.3	1.1	1.6	1.4	1.2	.4	.7	.1						51	51		
[illegible]4/ 73				.5	.9	1.9	1.6	1.5	1.5	.9	.4							69	69	1	
[illegible]2/ 71			.3	.3	2.[illegible]	1.1	1.6	1.2	1.4	.9	.1	.1						67	67	7	
[illegible] / 69		.7		1.2	.8	1.4	.8	1.4	.9	.8	.1							60	61	18	2
6[illegible]/ 67	.1	.1	.4	.7	1.6	2.7	1.4	.4	.8	.4								64	64	34	6
6/ 65		.5	.8	1.2	1.1	.8	1.2	.9	.5									53	53	63	12
[illegible]4/ 63		.4	.8	2.0	.8	2.8	1.6	.3	.7									70	70	97	17
2/ 61		1.4	.9	1.4	.8	.4	.4	.1	.1									41	41	64	24
[illegible]/ 59	.3	1.8	1.5	1.9	.8	.7	.3											53	53	109	75
[illegible]/ 57		.4	.5	.3	.1	.5	.1		.1									16	17	104	63
5[illegible]/ 55	.1	.8	.8	.1		.1												15	15	72	60
[illegible]4/ 53		.3																2	2	73	66
2/ 51			.1		.1													2	2	45	64
5 / 49		.1	.1															2	2	17	47
[illegible]8/ 47																				11	42
4[illegible]/ 45																				3	7[illegible]
[illegible]4/ 43																				1	3[illegible]
[illegible]2/ 41																				1	4[illegible]
[illegible] / 39																					27
3[illegible]/ 37																					1[illegible]
[illegible]6/ 35																					14
3[illegible]/ 33																					19
[illegible]2/ 31																					4
[illegible] / 29																					[illegible]
[illegible]/ 27																					[illegible]
2[illegible]/ 23																					1

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) AUG 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 69-73,74-79,81 YEARS | MAY MONTH

 1800-2000 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 1 TOTAL	.5	6.5	6.4	10.0	9.9	14.9	13.0	11.4	11.4	7.4	5.7	1.9	1.2						742		1 74
																		740		740	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2326960	39178	52.9	18.494	740							
Dry Bulb	3691627	52029	70.1	7.649	742			61.0	37.0	10.9		9?
Wet Bulb	2615753	43823	59.2	5.272	740			7.5	.1			93
Dew Point	1941086	37414	50.6	8.181	740		1.5	1.0				93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) | TAEGU AB KO (STATION NAME) | 69-70,74-79,81 (YEARS) | MAY (MONTH)

 | 21[illegible]-23[illegible] (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 79								.1										1	1		
7 / 77						.1	.3	.3	.1									6	6		
6/ 75					.3	.7	.3	.1	.1									11	11		
4/ 73				.5	.3	.4	.7	.8										20	20		
/ 71			.3	.4	1.5	1.2	.9	.1	.3									35	35		
/ 69			1.1	.4	1.7	.9	.8	.7	.1									43	43		
/ 67	.1	.5	1.1	1.7	3.1	1.9	1.7	.8	.4									85	85	15	1
6/ 65	.1	.5	1.7	2.3	1.7	2.3	1.2	.3	.3									78	79	32	8
4/ 63		1.3	2.0	4.4	1.9	3.5	1.1	.5		.1								111	112	41	[illegible]
[illegible]/ 61		1.2	3.1	2.8	2.6	1.2	.4	.4	.1									88	89	74	[illegible]2
/ 59	.5	2.4	4.4	3.2	2.6	1.5	.7	.1	.1									116	116	93	6[illegible]
/ 57	.1	1.2	2.0	1.7	1.3	.3	.4											53	53	110	57
5 / 55		.8	2.2	1.5	.5	.4		.1										41	43	107	67
4/ 53		1.3	.8	.8	.4	.5	.1											30	31	87	76
2/ 51		.5	.7	.1	.3													12	12	84	72
5 / 49		.4	.5		.1	.3												10	10	48	85
/ 47		.5																4	4	25	63
4 / 45																				22	81
4/ 43																				4	38
2/ 41																				4	33
/ 39																					[illegible]7
/ 37																					8
/ 35																					11
3+/ 33																					7
2/ 31																					7
/ 29																					1
/ 27																					5
/ 25																					2
TOTAL	.9	10.9	19.9	20.0	18.3	15.2	8.6	4.4	1.6	.1								744	750	744	744

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.	3428247	49160	66.1	15.564	744	≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb	2988280	47138	62.9	5.849	750			24.9	4.7			9[illegible]
Wet Bulb	2375124	41858	56.3	5.209	744			1.9				9[illegible]
Dew Point	1948510	37686	50.7	7.300	744		1.9	.1				9[illegible]

USAFETAC FORM AUG 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
69-70,74-79,81 — YEARS
MAY — MONTH
PAGE 1
ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL			
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
4/ 93												.0						1	1		
/91											.0	.1						7	7		
/ 89									.0	.0	.1	.1	.1		.0			19	19		
8/ 87									.0	.1	.1	.1	.1	.0	.0			30	30		
6/ 85						.0		.1	.1	.2	.2	.1	.3	.2				67	67		
4/ 83						.0	.0	.2	.2	.3	.3	.5	.1					93	93		
/ 81						.0	.4	.4	.5	.5	.7	.4	.1					167	168		
/ 79						.2	.2	.6	.5	.5	.5	.1	.1	.0				157	158		
7 / 77				.0	.1	.4	.9	.9	1.3	.7	.6	.3	.0					303	303		
6/ 75				.1	.2	.5	.8	.8	.6	.5	.4	.1						218	218	2	
4/ 73			.0	.2	.3	.7	.9	.7	.7	.4	.1	.1						244	244	2	
/ 71		.0	.4	.1	1.0	.7	1.1	.5	.5	.4	.0	.1						265	266	27	1
/ 69		.3	.5	.5	1.0	1.1	.6	.6	.4	.3	.1							297	299	101	4
6/ 67	.1	.2	.9	1.1	1.4	1.4	.8	.5	.3	.1	.0							391	391	168	24
6/ 65	.1	.6	1.0	1.3	1.3	.9	.8	.6	.3	.1								384	387	292	63
4/ 63	.1	1.2	1.8	2.3	1.4	1.9	.7	.3	.2	.0								566	569	459	143
/ 61	.1	1.2	2.0	1.2	1.3	.4	.2	.1	.1									373	374	584	166
/ 59	.3	2.4	3.3	2.6	1.3	.8	.3	.1	.0									627	629	681	424
/ 57	.1	1.7	1.9	1.2	.8	.3	.1	.0	.0									345	349	682	403
5/ 55	.2	1.7	2.0	1.1	.3	.2	.0	.0										321	324	637	501
4/ 53	.2	1.8	1.3	.8	.4	.3	.0											275	277	641	562
2/ 51	.1	1.2	1.5	.2	.2	.1	.0											188	191	475	583
/ 49	.2	.7	1.2	.3	.1	.1												149	149	350	582
/47	.1	.9	.4	.1	.1													91	92	257	439
/45	.1	.8	.3	.0	.1													73	74	177	582
4/ 43		.2	.1	.0														20	20	87	328
2/ 41	.0	.1	.1															17	17	33	386
/ 39		.0																1	1	23	164
/37																				11	91
/35																					87
/33																					73
2/ 31																					5
/29																					16
/27																					35

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) JAN 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

42212 (STATION) TAEGU AB KO (STATION NAME) 69-7[illegible],74-79,81 (YEARS) MAY (MONTH)

ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 25																					6
[illegible] / 23																					5
[illegible] / 19																					1
TOTAL	1.[illegible]	15.0	18.8	13.2	11.2	10.0	7.9	6.3	5.7	4.1	3.2	2.0	.8	.2	.1				5717		5689
																		5689		5689	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	24838461	357817	62.9	20.253	5689							
Dry Bulb	24509495	370201	64.8	9.696	5717			294.6	170.2	58.2	.1	744
Wet Bulb	18516[illegible]46	322628	56.7	6.213	5689			39.2	.5			744
Dew Point	14641434	285362	50.2	7.589	5689		14.8	3.8				744

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO (STATION / STATION NAME) | 68-70,74-79 (YEARS) | JUN (MONTH)

 | 0000-0200 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/ 79			.5															3	3		
7 / 77		.2	.6		.2	.3												8	8		
/ 75		.9	1.1	.3	.5		.2											19	19	4	1
4/ 73		2.0	1.2	1.4	.8	.6	.6											43	43	11	5
/ 71		2.2	4.8	1.4	2.5	.3	.2	.2										74	74	24	15
/ 69	.2	1.6	5.1	2.0	.9	.5	.3											68	68	40	20
/ 67	.2	2.3	5.5	4.2	1.6	.2												89	90	60	43
6/ 65	.3	5.5	6.4	1.9	.5	.2												94	95	61	47
4/ 63	.8	6.7	6.7	3.7	.6	.5												122	122	110	64
/ 61	.2	3.6	2.8	1.7	.6													57	57	115	78
/ 59		1.1	2.8	1.4	.6		.2											39	39	84	131
/ 57		1.2	.2	.3														11	11	44	67
5 / 55	.6	.3			.2													7	7	43	49
4/ 53		.9		.2														7	7	12	41
/ 51	.2																	1	1	11	28
/ 49																					18
/ 47																				3	7
/ 45																					5
4/ 43																					1
2/ 41																					1
/ 39																					1
/ 35																					1
TOTAL	2.3	28.5	37.7	18.5	8.9	2.5	1.4	.2										642	644	642	642

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4217759	51579	80.3	10.733	642							
Dry Bulb	2865957	42849	66.5	4.825	644			42.6	10.2			5
Wet Bulb	2541719	40275	62.7	4.857	642			19.5	2.1			5
Dew Point	2343529	38607	60.1	5.842	642			11.8	.8			5

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
JUN — MONTH

0300-0500 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
/ 81					•													1	1		
/ 79			• 3	• 2														3	3		
7 / 77		• 3	• 5	• 3														7	7		
6/ 75			• 2	• 2														2	2	4	2
4/ 73	• 2	1 • 8	• 5	• 3				• 3										20	20	6	4
/ 71	• 2	1 • 5	3 • 2	• 6	• 6		• 2											41	42	25	8
/ 69	• 3	2 • 3	1 • 8	• 5	• 5													35	35	21	25
6/ 67	• 6	3 • 7	5 • 0	3 • 0	• 9													37	37	55	26
6/ 65	1 • 1	8 • 8	6 • 4	1 • 1	• 5													117	119	61	52
4/ 63	1 • 2	8 • 7	5 • 6	1 • 8	• 3													116	116	103	63
2/ 61	• 6	6 • 7	2 • 1	• 9	• 2													69	70	119	79
/ 59	• 9	6 • 5	5 • 2	2 • 0	• 5													99	99	97	133
/ 57	• 2	2 • 9	• 8															25	25	56	81
5 / 55	• 3	1 • 1	• 5	• 3														14	14	61	44
4/ 53	• 2	• 9	• 3		• 2													10	11	23	44
2/ 51	• 2	• 5	• 2	• 2														6	6	11	35
9 / 49	• 5		• 2	• 2														5	5	10	22
8/ 47																				1	9
4 / 45																				4	4
2/ 43																					2
4 / 39																					4
TOTAL	6 • 2	45 • 7	32 • 6	11 • 4	3 • 7		• 2	• 3											662		657
																		657		657	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	4816656	55886	85.1	9.310	657							
Dry Bulb	2755581	42537	64.3	5.124	662			26.8	4.5	.1		9
Wet Bulb	2503487	40417	61.5	5.111	657			15.2	1.4			9
Dew Point	2356219	39163	59.6	5.759	657			8.9	.8			9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 63-70,74-79 | JUN

STATION | STATION NAME | YEARS | MONTH

 0600-0900
HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 91				.5	.3													5	5		
/ 79			.3	.3														4	4		
7 / 77			.3	.3														4	4		
6/ 75		.3	.3	.3	.2			.2										8	9	5	
4/ 73	.2	1.1	1.2	.9	.6	.2												27	27	9	6
2/ 71	.2	3.1	1.4	1.6	1.1													47	47	26	12
/ 69		2.5	3.6	2.8	.8	.5												65	65	23	24
6/ 67	.2	3.3	6.4	3.3	1.2	.8												97	97	48	24
6/ 65	1.1	4.4	5.9	2.2	.3													89	90	71	54
4/ 63	1.4	7.8	4.1	3.3	.3													108	110	109	65
2/ 61	.5	4.5	3.9	1.7	.2													69	71	118	92
/ 59	.5	4.8	5.0	1.9		.2												79	79	85	124
/ 57	.2	2.0	.5	.2														18	18	65	72
5 / 55	.2	1.1	.3	.2														11	11	51	64
4/ 53		.5	.5		.2													7	7	16	43
2/ 51		.5	.2															4	4	7	36
5 / 49																				7	13
/ 47			.2															1	1	2	8
/ 45																					2
4/ 43																				1	
2/ 41																					1
4 / 39																					2
TOTAL	4.2	35.8	33.9	19.3	5.1	1.6		.2										643	649	643	643

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4439010	53160	82.5	9.710	643							
Dry Bulb	2786665	42397	65.3	5.124	649			35.8	6.8	.7		9
Wet Bulb	2490636	39890	62.0	4.987	643			15.5	2.0			9
Dew Point	2317822	38434	59.8	5.652	643			9.2	.8			9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUN (MONTH)

 0900-1100 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
6/ 85						.2	.2	.2			.2	.2						5	5		
4/ 83					.2	.5	.9	.5	.2									14	14		
/ 81			.2	1.1	.6	1.4	1.4	.3	.3	.5	.2							38	38		
/ 79			.3	.9	1.1	2.9	1.1	1.9										53	53		
7 / 77			.9	3.1	4.8	2.8	1.5	1.1	.6	.2								97	97	1	
6/ 75	.3		.9	2.8	4.3	2.9	2.9	.5	.2									96	96	15	3
4/ 73	.2	.6	.9	2.3	2.8	2.6	1.4	.9										76	76	30	10
2/ 71		.9	2.9	2.2	4.2	1.4	1.1											82	82	58	23
/ 69	.2	1.1	2.6	2.0	1.4	1.1			.2									55	55	98	29
/ 67		.9	2.9	2.0	1.7	1.1	.8											61	61	92	57
6/ 65	.3	.3	.8	1.7	.8	.3												27	27	108	79
4/ 63	.2	1.4	.8	.9	.8	.3												28	28	98	83
2/ 61		.8	.3	.2	.2													9	9	65	74
/ 59		.2	.6															5	5	51	45
/ 57		.2																1	1	17	63
5/ 55		.2																1	1	12	52
4/ 53																				3	34
2/ 51																					20
/ 49																					13
/ 47																					6
/ 45																					2
4/ 43																					2
2/ 41																					1
TOTAL	1.1	6.5	14.2	19.1	22.7	17.4	11.3	5.2	1.4	.6	.3	.2							648		642
																		648		646	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3034753	43503	67.1	13.286	648			80.1	52.6	10.6		9
Dry Bulb	3502159	47513	73.3	5.331	648			40.8	6.4			9
Wet Bulb	2828873	42715	65.9	4.513	648			16.8	1.8			9
Dew Point	2457135	39717	61.3	5.938	648							

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
JUN — MONTH

12[illegible]-14[illegible] — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible]4/ 93											.1		.1					2	2		
[illegible]2/ 91									.3	.1	.3		.3					7	7		
[illegible] / 89								.4	.6	.4	.4	.4	.3					18	18		
8/ 87						.1	.9	.9	1.7	.9	.1	.1	.1					34	34		
6/ 85					.3	.9	1.0	2.3	2.0	1.3	.6	.4	.1	.1				63	63		
4/ 83				.1	1.0	.7	3.5	2.2	2.2	1.5	.6	.3						83	83		
[illegible] / 81			.3	.6	1.2	1.5	3.6	3.6	1.7	1.3	.3	.1						98	98		
[illegible] / 79			.1	.7	1.2	2.6	1.6	3.6	1.6	.7								84	84		
7 / 77		.1	.6	.9	1.9	1.9	2.6	2.3	1.0	.6								82	82	1[illegible]	1
[illegible]6/ 75			.4	.9	.6	1.0	1.5	1.3										39	39	32	7
[illegible]4/ 73		.3	.6	1.3	.6	1.3	1.0	.3	.1									38	39	62	[illegible]0
[illegible] / 71		.3	1.7	1.6	1.0	1.0	.9		.1									46	46	82	18
[illegible] / 69			1.3	.7	1.3	1.3	.1	.1										34	34	119	36
[illegible] / 67	.1	.3	1.3	.3	.3	.9	.3	.3										26	26	110	52
[illegible]6/ 65	.3	.4	1.0	.3	.9													20	20	95	75
[illegible]4/ 63		.3	.4	.6														9	9	[illegible]4	64
[illegible]/ 61		.1	.1															2	2	[illegible]0	67
[illegible] / 59				.1														1	1	25	103
[illegible] / 57																				12	63
5[illegible]/ 55																				5	[illegible]
[illegible]4/ 53																					[illegible]2
[illegible]2/ 51																					28
5 / 49																					18
[illegible]/ 47																					8
4 [illegible]/ 45																					0
[illegible]4/ 43																					5
[illegible]2/ 41																					2
TOTAL	.4	1.9	8.0	8.2	10.2	13.3	17.1	17.5	11.5	6.9	2.5	1.5	1.0	.1					687		686
																		686		686	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2318961	38509	56.1	15.151	686							
Dry Bulb	4287494	54090	78.7	6.479	687			85.8	71.9	47.0	.3	9[illegible]
Wet Bulb	3147381	46359	67.6	4.601	686			54.4	13.6			9[illegible]
Dew Point	2570319	41755	60.9	6.484	686			16.3	2.4			9[illegible]

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) JUN (MONTH)

 15 TO 17 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible]/ 95											.1	.3						3	3		
[illegible]/ 93									.1	.3			.3	.1				6	6		
[illegible]/ 91									.7	.7	.4	.9	.3					21	21		
[illegible]/ 89								1.3	1.8	2.0	.6	.7	.3					46	46		
8/ 87							1.0	1.2	1.3	1.3	2.2	.3	.4	.4				56	57		
6/ 85					.1	1.3	2.0	1.8	2.8	2.9	1.8	.4		.7				95	95		
4/ 83				.3	.9	1.0	1.8	1.5	2.2	2.2	.3		.1					73	73		
[illegible]/ 81			.3	1.3	1.3	1.2	2.6	2.8	2.9	1.6	.1							95	96		
[illegible]/ 79			.1	.6	.7	1.6	.6	1.8	1.2	.3	.1							48	48	1	
7[illegible]/ 77			.3	.3	.9	1.3	2.6	.6	.6	.4								48	48	22	[illegible]
[illegible]/ 75		.4	.1	.7	.6	2.0	1.0	.4		.1	.1							39	39	38	9
[illegible]/ 73			.1	.4	1.2	1.0	1.2	.1										28	29	83	16
[illegible]/ 71		.3	1.3	1.6	1.9	.1	.4	.1	.1									35	35	62	[illegible]
7[illegible]/ 69		.7	1.9	.3		1.3	.1		.1									31	31	111	29
6[illegible]/ 67		.3	1.6	1.2	1.5	.3		.3										35	35	108	63
6/ 65	.3	.6	.3	.3	.6	.1												15	15	122	62
[illegible]/ 63		.4		.3	.1	.1												7	7	59	85
[illegible]/ 61		.3	.1	.4														6	6	35	64
[illegible]/ 59				.1														1	1	26	110
[illegible]/ 57																				12	69
5[illegible]/ 55																				7	61
4/ 53																				2	39
[illegible]/ 51																					31
5 / 49																					11
[illegible]/ 47																					7
[illegible]/ 45																					8
[illegible]/ 43																					1
[illegible]2/ 41																					6
[illegible] / 39																					2
3[illegible]/ 37																					2
3[illegible]/ 33																					1
TOTAL	.3	3.1	6.3	7.6	8.9	11.5	13.4	11.9	13.9	12.0	5.8	2.6	1.5	1.3					688		685
																		685		685	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2161281	36839	53.8	16.226	685							
Dry Bulb	4467163	552[illegible].5	80.2	7.393	688			86.2	73.0	55.6	1.2	9[illegible]
Wet Bulb	3184674	46597	68.0	4.817	685			55.4	18.5			9
Dew Point	2562006	41630	60.8	6.839	685			18.1	3.5			9[illegible]

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
JUN — MONTH

18.0-2000 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
/ 91										.3	.1							3	3		
/ 89								.1	.1	.3	.3	.3	.1					9	9		
8/ 87						.1		.4	.6		.7	.1						14	14		
6/ 85					.3	.4	.6	.7	1.2	1.6	.7	.4	.1					42	43		
4/ 83				.1	.8	.6	.9	1.3	1.6	1.6	.3	.1	.1					80	80		
/ 81			.3	1.2	.9	2.0	2.6	2.5	1.0	.7	.3							79	79		
/ 79			.3	1.3	1.2	2.2	1.6	1.9	1.5	.7								71	71	1	
7/ 77			.6	2.3	2.8	2.9	4.3	2.6	.9	.1								109	109	5	
6/ 75		.7	.1	.4	2.5	2.9	1.8	.4										61	61	20	6
4/ 73			.6	1.5	.9	1.5	1.7	.3										39	39	47	12
/ 71		.3	1.8	1.6	1.9	.9	.1		.1	.1								47	47	66	18
/ 69		.9	2.2	1.6	1.7	.3	.4	.1	.1									46	46	89	26
/ 67		.6	2.2	.9	1.6	.7	.3											43	43	125	49
6/ 65	.1	1.5	.9	1.5	.4				.1									31	31	130	59
4/ 63	.1	.7	.4	.9	.6	.1												20	21	90	99
/ 61		.4	.4	.6	.3													12	12	54	61
/ 59		.3	.1	.3														5	5	35	111
/ 57																				21	76
5/ 55		.3																2	2	9	52
4/ 53																				6	34
2/ 51																				1	24
/ 49																					17
/ 47																					11
/ 45																					7
4/ 43																					3
2/ 41																					1
/ 39																					2
/ 35																					1
TOTAL	.3	5.7	10.0	13.6	14.9	14.8	13.3	10.5	7.3	5.6	2.5	1.0	.4					683	685	683	653

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2698387	41557	60.8	15.792	683							
Dry Bulb	4000227	52137	76.1	6.835	685			80.7	62.8	30.6		
Wet Bulb	3039642	45454	66.6	4.636	683			45.7	9.6			
Dew Point	2541878	41452	60.7	6.188	683			14.1	2.4			

USAFETAC FORM 0-26-5 (OL A) 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-70, 74-79 — YEARS
JUN — MONTH

PAGE 1
2100-2300 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 83						.1	.3		.1									4	4		
[illegible] / 81			.1	.3	.3	.3	.3	.1	.1									11	11		
[illegible] / 79		.1	.6	.6	.9	1.0	.3	.6	.3									30	30		
7[illegible] / 77		.4	.9	2.0	1.7	.3	1.5	.3										49	49	2	2
[illegible]6/ 75		1.0	1.2	1.7	2.3	2.0	.9	.6	.1									68	69	9	7
4/ 73		.7	1.5	4.5	2.8	2.[illegible]	.9	.7										90	91	30	1[illegible]
[illegible] / 71		.6	2.5	2.6	5.8	.7	.7	.3										91	91	42	14
[illegible] / 69		1.5	2.6	2.5	2.2	.9	.3	.1										69	69	51	31
[illegible] / 67	.3	1.7	3.5	4.8	1.[illegible]	.1	.1											80	80	91	44
6/ 65		4.1	3.9	2.3	1.3	1.0												87	87	137	61
[illegible]4/ 63	.3	2.3	2.8	2.2														52	53	161	97
[illegible]/ 61		.6	1.3	1.5		.1												24	24	80	53
[illegible] / 59		1.5	.3	.9	.1	.1	.1											21	21	46	129
[illegible] / 57		.4	.1															4	4	46	74
5 / 55		.3																2	2	16	47
4/ 53		.6																4	4	8	29
[illegible]/ 51																				5	31
[illegible] / 49																				2	21
[illegible] / 47																					4
[illegible] / 45																					4
[illegible]/ 43																					[illegible]
[illegible] / 39																					1
3[illegible] / 37																					[illegible]
TOTAL	.6	15.9	21.3	25.9	18.5	8.9	5.4	2.8	.7										689		686
																		696		686	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	377[illegible]952	50084	73.0	12.922	686							
Dry Bulb	3412777	48345	70.2	5.466	689			64.5	33.2	2.5		9[illegible]
Wet Bulb	2854368	44208	64.4	4.752	686			28.2	4.1			9[illegible]
Dew Point	2554862	41668	60.7	5.910	686			13.6	2.0			9

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
JUN — MONTH
ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
97 / 95											.0	.0						3	3		
95 / 93									.2	.0	.0		.1	.				8	8		
93 / 91									.1	.2	.1	.1	.1					31	31		
91 / 89								.2	.3	.4	.2	.2	.1					73	73		
89 / 87						.0	.2	.3	.5	.3	.4	.1	.1	.1				104	105		
87 / 85					.1	.4	.5	.6	.8	.8	.4	.2	.0	.1				205	206		
85 / 83				.1	.3	.4	.9	.7	.8	.7	.2	.1	.0					221	221		
83 / 81			.2	.6	.6	.8	1.4	1.2	.8	.5	.1	.0						327	328		
81 / 79		.3	.3	.5	.6	1.3	.7	1.2	.6	.2	.0							296	296	2	
79 / 77		.1	.6	1.1	1.5	1.2	1.6	.9	.4	.2								404	404	43	5
77 / 75	.	.4	.5	.9	1.4	1.4	1.3	.4	.0	.0	.0							332	334	107	31
75 / 73	.1	.8	.8	1.6	1.2	1.2	.8	.3	.0									361	364	265	73
73 / 71	.	1.1	2.4	1.7	2.3	.6	.5	.1	.1	.0								463	464	379	128
71 / 69	.1	1.3	2.6	1.5	1.3	.7	.2	.1	.1									403	403	552	218
69 / 67	.2	1.6	3.5	2.4	1.2	.5	.2	.1										518	519	689	354
67 / 65	.4	3.2	3.2	1.4	.7	.2			.2									460	484	775	487
65 / 63	.5	3.5	2.6	1.7	.3	.1												462	466	804	666
63 / 61	.2	2.1	1.4	.9	.2	.0												248	251	646	628
61 / 59	.2	1.8	1.7	.8	.2	.	.1											250	250	439	932
59 / 57	.	.8	.2	.1														59	59	273	567
57 / 55	.1	.4	.1	.1	.													37	37	204	413
55 / 53	.	.4	.1	.0	.0													28	29	70	304
53 / 51	.0	.1	.0	.0														11	11	35	233
51 / 49	.1		.0	.0														5	5	19	133
49 / 47			.															1	1	6	63
47 / 45																				4	33
45 / 43																				1	16
43 / 41																					12
41 / 39																					12
39 / 37																					4
37 / 35																					2
35 / 33																					1
TOTAL	1.9	17.6	20.2	15.4	11.7	8.8	7.9	6.2	4.5	3.2	1.4	.7	.4	.2				5330	5352	5330	5330

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	27451759	371017	69.6	17.465	5330							
Dry Bulb	28073023	385073	71.9	8.285	5352			505.7	319.2	150.4	1.5	72
Wet Bulb	22600780	345908	64.9	5.340	5330			277.5	58.6			720
Dew Point	19703770	322426	60.5	6.116	5330			109.3	14.7			720

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

 0000-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
6/ 85				.1														1	1		
[illegible]/ 83			.1	.6	.3			.1										8	8		
[illegible]/ 81	.1	.1	3.9	3.9	.9	.3	.1											83	64	1	1
/ 79	.1	1.2	5.4	3.7														70	70	14	3
7 / 77		4.2	9.9	2.5	.3	.1												114	114	41	25
[illegible]6/ 75	.9	5.7	4.5	1.9	.1													88	98	107	79
[illegible]4/ 73	.4	5.4	4.9	1.6	.4													86	86	127	108
[illegible]/ 71	.4	4.5	2.1	1.0	.4													57	57	88	114
/ 69	.7	3.4	3.0	1.3	.3													59	59	81	83
/ 67	.3	1.9	5.5	1.0	.1													60	60	53	72
6/ 65	1.3	1.5	.9	.1	.1													27	27	56	63
4/ 63		1.0	1.2	.3														17	17	49	37
/ 61		.9	.7															11	11	22	45
/ 59		.3	.4															5	5	12	38
/ 57		.3																2	2	8	12
5 / 55																				2	9
/ 51																					1
TOTAL	4.5	30.5	42.7	18.4	3.1	.4	.1	.1											669		666
																		668		668	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4859049	56725	84.9	7.944	668							
Dry Bulb	3670127	49425	73.9	5.285	669			84.4	59.9	14.5		9[illegible]
Wet Bulb	3355294	47226	7[illegible].7	4.978	668			72.3	40.4	.4		9[illegible]
Dew Point	3202735	46117	69.3	5.328	668			64.5	29.9	.3		9[illegible]

USAFETAC FORM AM 84 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

0300-0500 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
9/ 83				.3			.1											3	3		
/ 81		.3	2.4	1.1	.1	.1	.1											30	30		
/ 79	.1	1.5	4.5	2.0		.1												59	59	3	
7-/ 77	.1	5.6	7.3	1.1														99	99	36	17
5/ 75	1.3	8.1	4.1	.4														99	99	97	71
4/ 73	1.8	7.3	5.2	1.3														113	113	136	119
/ 71	1.7	2.5	4.5	.1														63	63	1 6	118
/ 69	.4	4.8	2.7															56	56	79	67
6 / 67	1.3	3.5	6.5	1.1	.4													91	92	77	93
6/ 65	1.4	4.4	1.1															49	50	73	67
4/ 63	.3	2.4	.8	.4														28	28	48	59
/ 61		1.3	.3															11	11	32	41
/ 59		.8	.1															7	7	15	37
/ 57		.6																4	4	6	10
5/ 55																				4	11
TOTAL	.4	42.8	39.2	8.4	.6	.3	.3												714		712
																		712		712	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5560595	62723	88.1	7.023	712							
Dry Bulb	3770746	51760	72.5	5.095	714			80.0	52.5	5.6		9
Wet Bulb	3517036	49920	70.1	4.894	712			69.7	35.5	.4		9
Dew Point	3389744	48990	68.8	5.160	712			63.3	27.4	.1		9

USAFETAC FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | JUL MONTH

 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
6/ 85					.1													1	1		
4/ 83				.1	.3	.1	.1											5	5		
/ 81		.1	2.6	4.7	1.0		.1											59	59		
/ 79		1.0	5.4	1.9	.9	.1												64	64	5	1
7 / 77	.3	3.9	7.3	2.2	.3	.1												97	97	43	2
76/ 75	.9	6.7	4.1	1.0	.3													89	89	105	63
4/ 73	.9	5.8	3.1	2.2														82	82	119	121
/ 71	2.0	2.5	3.8	.4	.9													66	66	107	117
/ 69	.3	5.4	3.6	1.1														71	71	94	94
/ 67	.6	2.6	4.5	1.3	.1													63	63	82	69
6/ 65	.9	4.2	1.3	.1														45	45	68	70
4/ 63	.1	2.2	.9	.1														23	23	56	63
/ 61		1.2	.4															11	11	34	41
/ 59	.1	1.2																9	9	8	52
/ 57		.4																3	3	7	9
5 / 55																				3	8
TOTAL	6.1	37.2	36.9	15.1	3.9	.4	.3											628	638	686	658

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5129463	59139	86.1	8.183	688							
Dry Bulb	3697385	50297	73.1	5.445	688			80.7	53.7	11.9		9
Wet Bulb	3407751	48301	70.2	4.942	688			69.2	36.4	.1		
Dew Point	3259212	47218	68.6	5.204	688			60.2	27.7			9

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	• 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
6/ 95									• 1									1	1		
4/ 93							• 4	• 4										6	6		
/ 91						• 4	• 3	• 7	• 1									11	11		
/ 89					• 4	1 • 1	2 • 2	• 7										32	32		
8/ 87					• 6	3 • 1	2 • 1											41	41		
6/ 85				1 • 4	3 • 1	4 • 7	1 • 5	• 3										79	79		
4/ 83			1 • 1	3 • 8	2 • 1	2 • 5	• 7		• 1									74	74		
/ 81	• 1	• 1	1 • 7	3 • 9	1 • 3	2 • 4	• 6	• 3										74	74	14	1
/ 79		• 7	1 • 7	2 • 5	2 • 3	1 • 0	• 1	• 3										59	59	60	2
7 / 77		1 • 7	2 • 9	3 • 3	3 • 3	• 8	• 7											92	92	128	47
6/ 75		1 • 5	2 • 4	3 • 1	1 • 3	• 8												65	65	102	94
4/ 73	• 3	1 • 8	2 • 2	2 • 2	1 • 1	• 1												56	56	93	13
2/ 71	• 6	1 • 8	1 • 7	1 • 1	1 • 3													44	44	89	95
/ 69	• 3	• 7	1 • 8	1 • 0	• 3													29	29	79	74
6 / 67	• 4	• 8	1 • 8	• 7														27	27	58	78
6/ 65	• 1	1 • 0	• 6	• 3														14	14	45	61
4/ 63		• 1	• 3	• 1														4	4	28	48
2/ 61	• 1	• 7																6	6	15	42
/ 59		• 4																3	3	4	36
/ 57																				2	7
5 / 55																					2
TOTAL	2 • 0	11 • 4	13 • 1	23 • 4	16 • 3	17 • 0	8 • 6	2 • 6	• 4										717		717
																		717		717	

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

PAGE 1 | 12.0-14.0 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible]												.1						1	1		
[illegible]										.4	.4	.4						9	9		
[illegible]									1.0	.3	.1	.1						11	11		
[illegible]							.1	.4	2.0	1.0								25	25		
[illegible]					.1		.3	2.0	.7	.6								26	26		
[illegible]					.1	1.0	2.0	3.6	1.3	.1	.3							59	59		
[illegible]					.3	1.4	2.3	4.2	.7	.6	.1							67	67		
[illegible]					.3	3.2	3.6	.9	.7	.1	.1							62	62		
[illegible]			.1	.1	1.1	3.3	1.7	1.0	.3	.1								55	55	2	
[illegible]				2.3	1.4	2.0	1.4	.7	.6									57	57	1	2
[illegible]			1.1	2.0	1.8	2.1	1.1	.6										56	56	32	1
[illegible]		.3	.9	2.1	1.3	1.7	.3	.1										47	47	75	2
[illegible]		.9	3.2	3.3	3.3	1.1	.6											86	86	131	37
[illegible]		1.4	1.1	1.3	1.6	.4												41	41	103	86
[illegible]	.1	.6	1.1	1.6	.6	.1												29	29	101	116
[illegible]	.1	.3	.4	.3	.3	.3												12	12	86	97
[illegible]		1.0	1.9															20	20	64	82
[illegible]	.6	.4	1.3	.1	.1													18	18	45	65
[illegible]	.1	.3	.9	.4														12	12	32	65
[illegible]	.1	.3																3	3	11	59
[illegible]		.3																2	2	11	29
[illegible]																				4	27
[illegible]																					9
[illegible]																					4
[illegible]																					1
TOTAL	1.1	5.7	12.0	13.3	11.6	16.8	13.5	13.5	7.3	3.3	1.1	.7							698		698
																		698		698	

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3132800	45726	65.5	14.035	698			90.7	84.1	60.9	9.6	97
Dry Bulb	4646518	57900	83.1	7.913	698			90.7	84.1	60.9	9.6	97
Wet Bulb	3818931	51523	73.8	4.754	698			85.3	59.3	8.0		93
Dew Point	3400375	48597	69.6	4.924	698			67.7	32.5	.7		97

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 68-70,74-79 | JUL

STATION | STATION NAME | YEARS | MONTH

1500-1700
HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
1 2/1 91								.1				.2						3	3		
1 8/ 89										1.1	1.0	.6						19	19		
3/ 97								.1	1.4	1.0	.4							21	21		
6/ 95							.1	.6	2.9	1.4								36	36		
4/ 93						.1	1.3	2.9	1.7	1.1	.1							52	52		
/ 91					.3	1.3	.8	2.4	2.8	.7	.4	.1						63	64		
/ 89						1.0	2.1	2.9	1.3	.7	.7							62	63		
8/ 87					.8	1.7	3.1	1.5	.1	.1	.3							55	55	1	
6/ 85				.3	1.0	3.2	1.8	1.0	.3	.1								55	55		
4/ 83			.3	2.4	.6	1.1	1.7	.6	.1	.1								49	49	7	1
/ 81			2.2	2.9	1.8	1.5	.7	.3										68	68	52	2
/ 79		.6	.7	1.4	.7	1.3	.4	.1										37	37	97	7
7 / 77		1.1	2.4	2.6	2.9	1.3	.7											79	79	130	57
6/ 75		1.3	1.0	1.3	.4	.4												31	32	109	89
4/ 73	.1	.3	.7	1.1	.4													19	19	93	101
/ 71		.7	1.3	.4		.3												19	19	79	104
/ 69	.1	1.5	.7	.1														18	18	57	88
6/ 67		.4	1.1	.6	.3													17	17	46	99
6/ 65	.1	.6	.3		.4													10	10	22	62
4/ 63	.1			.1														2	2	9	41
2/ 61			.3															2	2	9	27
/ 59																				5	28
/ 57																				1	4
5 / 55																					2
4/ 53																					4
TOTAL	.6	6.4	10.9	13.2	9.6	13.1	12.7	12.6	10.6	6.4	2.9	1.0							720		717
																		717		717	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3087312	45794	63.9	15.065	717							
Dry Bulb	5166875	60697	84.3	8.342	720			91.2	84.2	64.3	16.9	93
Wet Bulb	3990865	53379	74.4	4.861	717			87.0	63.4	13.2		93
Dew Point	3532406	50192	70.0	5.128	717			71.1	33.3	.5		93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

 1800-2000 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
1 C/ 99										.1	.3	.1						4	4		
8/ 97											.4							3	3		
6/ 95							.1	.3	1.1	.7								16	16		
4/ 93							.6	1.5	.3	.6								21	21		
/ 91				.1	.3	1.7	.8	2.2	.6	.4								44	44		
/ 89		.1		.1	.6	1.2	1.9	1.4	.6	.1	.1							45	46		
8/ 87				.1	1.1	3.6	2.6	.4	.4	.3								62	62	1	
6/ 85			.1	.3	1.8	3.9	1.3	.8	.1	.1								59	59	1	1
4/ 83			.3	2.5	2.9	1.4	1.1	.4	.1									63	63	4	1
/ 81		.1	1.1	4.8	2.9	.8	.7	.4	.1									80	80	34	1
/ 79		.7	1.7	3.6	2.1	1.5	.3	.1										72	72	70	10
7 / 77	.1	1.7	2.2	2.8	1.7	.7	.3											66	69	131	64
C/ 75		2.6	1.4	2.1	1.7	.4												59	59	125	87
4/ 73		.8	1.5	.8	.6	.4												30	30	108	130
/ 71		1.3	1.9	1.1	.8													35	35	56	107
/ 69		1.4	.8	.7	.3													23	23	68	78
/ 67	.3	.7	1.2	.3	.1													19	19	55	63
6/ 65		.6	.6	.4	.1													12	12	29	50
4/ 63	.1	.1	.3	.6														8	8	24	59
2/ 61			.3															2	2	9	29
/ 59			.1															1	1	10	26
C/ 57																				1	11
56/ 55																					8
4/ 53																					1
TOTAL	.6	9.8	13.5	20.2	16.8	15.6	9.4	7.6	3.3	2.3	.8	.1						726	728	726	726

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3689748	50840	70.0	13.367	726							
Dry Bulb	4850292	59166	81.3	7.578	728			90.1	80.2	56.0	5.6	9
Wet Bulb	3955346	53460	73.6	5.085	726			83.6	60.7	8.3		9
Dew Point	3586718	50880	70.1	5.371	726			69.4	37.7	1.0		9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47211 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
JUL — MONTH

2100-2300 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/91									.1									1	1		
/89						.1		.6										5	5		
8/87					.4	.4	.1											7	7		
6/85			.6	1.0	2.1	1.7	.1	.1										40	40		
4/83			1.1	4.4	2.6	1.4		.1										70	70	1	
/81		.3	2.6	7.7	2.9	1.3												105	105	10	3
/79		1.2	3.3	3.3	.8	.8	.3											71	71	35	17
7/77	.4	3.3	5.9	3.6	1.4	.3												106	106	96	44
6/75	.3	3.6	2.9	2.9	1.2	.4												82	83	137	93
4/73	.1	2.6	2.3	2.8	.4	.1												61	62	111	119
/71		2.5	2.2	.3	.7													41	41	74	116
/69	.1	3.3	1.8	1.3	.7													48	48	75	69
3/67	.6	1.1	3.6	1.8	.3													53	53	72	81
6/65	.6	.7	.6	.4	.1													17	17	44	52
4/63	.1	.7	.4	.8														15	15	39	60
2/61		.1	.1															2	2	19	21
/59		.1	.3															3	3	11	34
/57																				3	15
5/55																					1
4/53																					1
TOTAL	1.2	19.0	27.6	29.8	13.6	6.2	.6	.8	.1									727	729	727	727

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4671311	57823	79.5	9.978	727							
Dry Bulb	4305477	55853	76.6	6.705	729			88.3	70.2	31.6		93
Wet Bulb	3786721	52339	72.0	5.072	727			78.2	49.9	2.2		93
Dew Point	3553468	50672	69.7	5.457	727			68.3	34.3	.6		93

USAFETAC FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | JUL (MONTH)

ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] 2/101								.2				.1						4	4		
1 6/ 99										.2	.2	.1						32	32		
[illegible] 8/ 97								.3	.3	.2	.1	.0						35	35		
6/ 95							.1	.2	.8	.4								78	78		
4/ 93					.3	.0	.3	.9	.3	.3	.0							115	115		
/ 91				.0	.1	.5	.5	1.1	.6	.2	.1	.0						178	179		
/ 89		.1		.0	.2	.6	1.1	1.2	.3	.2	.1							211	213		
8/ 87				.3	.4	1.5	1.5	.4	.2	.1	.1							227	227	2	
6/ 85			.1	.4	1.2	2.1	.8	.4	.1	.1								290	290	3	1
4/ 83			.4	2.3	1.3	1.1	.7	.2	.1	.0								329	329	13	4
/ 81	.3	.1	2.2	3.9	1.5	1.0	.4	.2	.0									535	536	143	9
/ 79	.3	.9	2.9	2.6	1.3	.8	.2	.1										479	479	359	37
7 / 77	.1	2.7	5.3	2.7	1.7	.6	.3											741	742	733	311
6/ 75	.4	3.8	2.7	1.8	.8	.3												554	556	885	661
4/ 73	.5	3.0	2.6	1.8	.4	.1												476	477	888	944
2/ 71	.6	1.9	2.2	.6	.5	.1												337	337	695	868
/ 69	.2	2.6	2.0	.6	.2													324	324	557	574
9 / 67	.5	1.4	3.2	.9	.2													348	349	495	657
6/ 65	.6	1.6	.8	.2	.1													186	187	369	490
4/ 63	.1	.8	.5	.3														100	100	264	426
2/ 61	.3	.5	.3															47	47	151	275
/ 59	.3	.4	.1															28	28	69	280
/ 57		.2																9	9	28	73
5 / 55																				9	55
4/ 53																					7
2/ 51																					1
TOTAL	1.1	20.2	24.9	17.8	9.6	8.8	5.7	4.7	2.7	1.5	.6	.2						5653	5663	5653	5653

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	34153252	431822	76.4	14.370	5653							
Dry Bulb	34816403	441747	78.0	7.947	5663			695.3	562.6	293.8	33.4	744
Wet Bulb	29640410	408282	72.2	5.197	5653			626.9	398.3	36.9		744
Dew Point	27430831	392669	69.5	5.241	5653			532.5	258.9	3.6		744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
AUG — MONTH
PAGE 1
0000-2300 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible]/ 83				.3	.3		.1											5	5		
[illegible]/ 81	.1	.1	1.6	4.[illegible]	.4													43	43	1	1
[illegible]/ 79		1.5	6.2	3.2														74	74	2	1
7[illegible]/ 77	.9	7.2	12.3	4.3	.7													173	173	46	[illegible]7
[illegible]6/ 75	1.3	6.2	9.7	3.2	.1													140	141	15[illegible]	9[illegible]
[illegible]4/ 73	.4	4.0	5.1	1.3	.3													76	76	133	136
[illegible]/ 71	.6	2.1	2.8	.6														41	41	122	118
[illegible]/ 69	.6	2.9	4.7	.7														61	62	76	9[illegible]
[illegible]/ 67	.1	1.9	2.1	.1	.1													30	30	6[illegible]	67
6/ 65	.3	1.3	1.2															19	19	49	48
4/ 63	.3	1.[illegible]	1.[illegible]															16	16	[illegible]5	58
[illegible]/ 61			.3															2	2	12	21
[illegible]/ 59		.1																1	1	3	14
[illegible]/ 57																				2	4
5[illegible]/ 55																					1
[illegible]4/ 53																					1
TOTAL	4.7	28.3	47.0	17.8	2.1		.1											681	683	681	661

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5002945	58161	85.4	7.244	681			87.8	69.7	10.9		9[illegible]
Dry Bulb	3833[illegible]50	51[illegible]80	74.8	4.348	683			87.8	69.7	10.9		9[illegible]
Wet Bulb	3512239	48827	71.7	4.093	681			80.6	45.3	.3		9[illegible]
Dew Point	3363034	47762	70.1	4.413	681			72.9	35.1	.1		93

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISES PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) AUG (MONTH)

PAGE 1 0300-0500 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/ 81			.4	1.4		.1												14	14		
/ 79		1.3	4.3	.9		.1												46	46		
7-/ 77	1.3	7.4	10.0	2.6														147	147	94	19
75/ 75	1.6	7.1	5.6	1.1	.4													111	111	123	73
74/ 73	1.3	9.7	7.4	.9														135	135	141	127
72/ 71	1.4	4.9	3.6	.1														70	70	135	135
/ 69	1.1	3.1	3.6	.3	.1													58	58	99	92
6/ 67	.6	3.1	3.3	.3														51	51	71	88
6/ 65	1.3	2.4	.3		.1													27	28	45	64
4/ 63	.7	3.1	.1	.1	.3													31	31	35	54
/ 61		.6	.3	.1														7	7	14	27
/ 59		.4	.1															4	4	6	9
/ 57																				8	7
5-/ 55																				1	2
4/ 53																					3
2/ 51																					3
TOTAL	.7	43.2	38.9	7.8	1.0	.3												701	7 2	701	701

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 32 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5516385	61999	88.4	6.863	701							
Dry Bulb	3776595	51395	73.2	4.445	702			83.7	60.0	2.9		9
Wet Bulb	3534534	49686	70.9	4.285	701			78.5	38.1			3
Dew Point	3413804	48816	69.6	4.531	701			70.7	28.9			9

USAFETAC FORM 0-26-5 (OL A) JUL 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 68-70,74-79 | AUG
STATION | STATION NAME | YEARS | MONTH

 0600-0800 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 83				.1	.1													2	2		
[illegible] / 81			.9	4.3	.3	.1												38	38		
[illegible] / 79		1.5	4.4	2.1	.1													55	57		
7 / 77	.9	6.3	9.7	4.4	.9	.3												153	153	36	25
[illegible] / 75	1.8	4.3	6.9	1.8														98	98	124	76
[illegible] / 73	1.[illegible]	7.3	6.6	.7	.1													106	107	114	107
[illegible] / 71	2.3	3.5	3.4	.9														69	69	138	142
[illegible] / 69	.3	3.8	3.7	.3		.1												56	56	89	88
6 / 67	1.[illegible]	1.5	3.8	.3														45	45	69	75
6/ 65	.7	2.1	.3															21	21	50	56
4/ 63	.7	3.1	.4	.1														30	30	33	64
[illegible] / 61		.4		.1														4	4	18	24
[illegible] / 59		.6	.1															5	5	4	16
[illegible] / 57																				6	4
5 / 55																				1	2
[illegible] / 53																					1
[illegible] / 51																					2
TOTAL	9.8	33.7	40.2	15.1	1.6	.6													685		662
																		692		692	

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5194494	59286	86.9	7.739	682							
Dry Bulb	3742848	50530	73.8	4.750	685			84.9	61.8	8.8		93
Wet Bulb	3450060	48418	71.0	4.313	682			77.7	37.4			93
Dew Point	3318747	47475	69.6	4.525	682			70.0	28.4			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
AUG — MONTH

0900-1100 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 93									.1									1	1		
/ 91						.1	.1	.1										3	3		
/ 89					.1	1.4	1.2	.9										25	25		
87					1.3	4.5	2.2	.1										56	56		
85				1.7	4.9	6.8	1.2	.4										104	104		
/ 83			1.0	4.6	2.2	3.0	.9											81	81		
/ 81			1.9	6.8	2.5	2.3	1.2	.1										102	102	6	
/ 79		.7	2.6	4.2	3.2	2.0	.1											89	89	56	
7 / 77	.3	2.5	3.1	4.2	3.6	1.3	.1											104	105	144	9[illegible]
5/ 75	.6	.9	1.4	2.7	1.9	.6		.1										57	57	144	1[illegible]
4/ 73	.3	1.1	.1	2.7	.6	.1		.1										35	35	136	161
/ 71	.1	.6	.7	1.2		.1												19	19	77	104
/ 69		.6	.4	.1														8	8	66	74
/ 67	.4	.3	.3	.1														8	8	45	7[illegible]
6/ 65																				19	5[illegible]
4/ 63																				4	45
/ 61																				2	15
/ 59																				1	7
4/ 53																					1
2/ 51																					1
5 / 40																					1
TOTAL	1.7	6.5	11.6	28.5	20.2	22.4	6.9	2.0	.1										693		692
																		692		692	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3693538	50036	72.3	10.461	692							
Dry Bulb	455[illegible]004	56[illegible]48	80.9	4.955	693			93.0	88.3	55.8	.1	9[illegible]
Wet Bulb	3809892	51278	74.1	3.829	692			89.5	64.2	3.4		9[illegible]
Dew Point	3496992	49098	71.0	4.411	692			76.5	43.1			9[illegible]

USAFETAC FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 STATION | TAEGU AB KO STATION NAME | 66-70,74-79 YEARS | AUG MONTH

 12 0-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 99												.3	.1					3	3		
/ 95								.6	.8	1.0	.1							18	18		
/ 93						.1	1.3	2.7	1.4	1.3								48	48		
/ 91						1.3	2.0	5.8	2.0	.6	.1							83	83		
/ 89					.6	2.8	3.8	5.2	.7	.3								95	95		
/ 87				.1	.3	4.8	4.2	1.0	.6		.1							79	79		
/ 85			.1	.4	2.5	3.8	2.7	2.0	.3	.1								85	85		
/ 83				1.7	1.6	3.7	1.8	.6										66	66	2	
/ 81		.3	1.1	2.0	1.6	1.8	3.8	1.0		.1								85	85	79	1
/ 79	.1	1.1	2.	.7	1.1	2.3	.6	.6										60	60	95	6
7 / 77		.6	1.1	1.8	1.7	.4	.8	.1										47	47	172	56
/ 75		.4	.7	.3	.6	.3												16	17	151	99
/ 73	.4	.7	.6	.3	.1													15	16	94	121
/ 71		.3	.4															5	5	77	125
/ 69																				52	89
/ 67	.1																	1	1	22	68
6/ 65																				11	52
4/ 63																				1	57
/ 61																					11
/ 59																					11
/ 57																					5
4/ 53																					3
TOTAL	.7	3.4	6.1	7.4	10.3	21.4	21.1	19.5	5.8	3.4	.4	.3	.1					706	7 8	706	7 6

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2840580	43948	62.3	12.195	706			93.0	92.2	77.5	9.1	93
Dry Bulb	5189309	60487	85.4	5.538	708			91.4	71.5	7.4		93
Wet Bulb	4007609	53131	75.3	3.605	706			74.8	37.7	.4		93
Dew Point	3542398	49908	70.7	4.510	706							

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | AUG MONTH

 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
1 2/101														.3				2	2		
1 0/ 99										.1		.3						3	3		
d/ 97										.1	.4							4	4		
9/ 95								1.2	3.1	3.1	.7	.3						57	57		
4/ 93						.1	.6	5.9	1.8	1.2	.3							67	68		
/ 91					.1	1.6	1.2	6.3	1.3	1.5	.3							84	84		
/ 89					.1	1.2	2.0	3.8	1.2	.9								63	63		
8/ 87					1.5	3.5	2.8	1.5	.9		.3							71	71		
6/ 85		.1		.6	1.8	3.2	1.9	1.8			.3							66	66		
4/ 83			.9	2.3	1.0	1.9	2.0	1.2		.1	.1							66	66	5	1
/ 81		.3	2.5	2.6	1.2	1.9	2.2	1.0	.4	.1								84	84	37	5
/ 79		.6	.7	1.3	1.2	1.3	.3	.6										39	40	106	16
7 / 77		.7	1.9	1.5	1.3	1.0												38	39	176	56
76/ 75		1.5	.9	.4	.3	.1												22	22	116	78
4/ 73		.6	.4	.3														9	9	106	132
/ 71	.3		.4															5	5	58	106
/ 69		.3																2	2	41	94
/ 67			.1															1	1	28	66
6/ 65																				7	52
4/ 63																				1	51
2/ 61																					12
/ 59																					6
/ 57																					4
5 / 55																					4
4/ 53																					2
2 / 49																					1
TOTAL	.3	4.1	7.0	8.8	8.5	16.0	13.0	23.1	8.6	7.2	2.5	.6		.3				683	686	683	683

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2665121	41615	60.9	13.781	683			93.0	91.9	79.0	18.2	9
Dry Bulb	5147273	59273	86.4	6.144	686			91.9	74.6	11.6		9
Wet Bulb	3911308	51622	75.6	3.703	683			75.0	38.8	.5		9
Dew Point	3434966	48328	70.8	4.745	683							

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | AUG MONTH

 18 [illegible]-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
1 [illegible] / 99												.1						1	1		
[illegible] / 95								.1	.3		.4							6	7		
[illegible] / 93							.1	.7	.4	.4								12	13		
/ 91					.1	.6	.9	1.3	.6	.1	.1							26	26		
/ 89					.3	1.9	2.2	2.1	.1	.3								47	47		
8/ 87					.3	5.0	2.4	.6	.6									60	60		
6/ 85				.9	3.[illegible]	5.9	1.8	.1										79	80		
[illegible] / 83			.4	3.7	2.4	2.7	1.[illegible]	.9		.1								76	76	2	
/ [illegible]		.3	1.5	4.[illegible]	2.8	2.5	1.5											[illegible]	65	8	[illegible]
/ 79		1.3	1.9	2.2	3.1	1.6	.6	.1										77	77	67	[illegible]
7 / 77	.1	2.7	2.2	4.6	3.[illegible]	1.8		.1										[illegible]	[illegible]	149	[illegible]
[illegible] / 75		1.3	1.5	1.8	1.6	.7	.1											46	46	[illegible]	[illegible]
[illegible] / 73	.3	1.2	.7	1.8	1.[illegible]	.4												37	37	[illegible]	[illegible]
[illegible] / 71	.1	.1	.1	.6	.7													12	12	91	111
[illegible] / 69	.1	.4	.3	.3														8	8	[illegible]	69
[illegible] / 67		.4																[illegible]	[illegible]	47	69
6/ 65		.3																[illegible]	[illegible]	[illegible]	43
4/ 63																				9	57
[illegible] / 61																					27
/ 59																					[illegible]
[illegible] / 57																					4
TOTAL	.7	8.3	8.7	19.9	18.4	23.3	10.7	6.2	2.1	1.0	.6	.1							680		675
																		675		675	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3342295	46781	69.3	12.189	675							
Dry Bulb	4593086	55750	82.0	5.744	680			92.7	89.6	60.3	2.9	9[illegible]
Wet Bulb	3723935	50065	74.2	3.965	675			89.0	63.1	4.0		9[illegible]
Dew Point	3376537	47639	70.6	4.615	675			73.6	39.3	.6		9[illegible]

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47312 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) AUG (MONTH)

 21 0-23 0 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/ 89								.1										1	1		
8/ 87							.4											3	3		
6/ 85			.1	.1	.6	1.1												14	14		
4/ 83			.6	3.6	2.	.1	.1											46	46		
/ 81			4.9	9.1	3.8	.3												129	129	1	
/ 79		2.5	3.1	6.3	1.5	.3	.3											100	100	14	2
7 / 77	.3	6.2	7.4	7.7	1.8		.1											168	168	113	49
6/ 75	.7	2.7	3.9	2.5	1.													77	78	170	1. 9
4/ 73	.4	1.8	2.5	2.5	1.4	.1												63	63	130	12
2/ 71	.6	.6	2.8	2.1	.8	.1												50	51	96	1. 6
/ 69	.1	.7	2.7	.6	.3													31	32	59	66
/ 67	.1	.6	1.5	.4														19	19	58	67
6/ 65		.7	.8															11	11	44	4
4/ 63	.1		.3															3	3	24	63
2/ 61																				5	24
/ 59																				1	16
/ 57																					3
TOTAL	2.4	15.7	30.6	35.0	13.1	2.1	1.0	.1											718		715
																		715		715	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 90 F	≥ 93 F	Total
Rel. Hum.	4631737	57205	80.0	8.772	715							
Dry Bulb	4295666	55442	77.2	4.510	718			91.2	78.0	30.8		93
Wet Bulb	3796147	52317	72.8	4.075	715			83.4	55.7	.4		93
Dew Point	3572770	50438	70.5	4.544	715			74.0	37.7			93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47012 | TAEGU AB KO | 66-70,74-79 | AUG

STATION | STATION NAME | YEARS | MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
2/ 101														.0				2	2		
1/ 99										.0		.1	.					7	7		
3/ 97										.0	.1							4	4		
6/ 95								.2	.5	.5	.2	.0						81	82		
4/ 93						.0	.3	1.2	.5	.4	.0							128	130		
2/ 91					.0	.5	.5	1.7	.5	.3	.1							196	196		
1/ 89					.1	.9	1.2	1.5	.3	.2								231	231		
6/ 87				.2	.4	2.2	1.5	.4	.3		.1							269	269		
6/ 85		.1	.3	.5	1.6	2.6	.9	.5	.0	.0	.0							348	349		
4/ 83			.4	2.1	1.2	1.4	.8	.3		.0	.0							342	342	9	1
2/ 81	.	.1	1.9	4.3	1.6	1.1	1.1	.3	.1	.0								580	580	82	5
1/ 79	.	1.4	3.1	2.6	1.3	1.2	.2	.2										540	543	342	34
7/ 77	.4	4.2	5.9	3.9	1.6	.6	.1	.0										928	932	880	333
6/ 75	.7	3.1	3.8	1.7	.7	.2	.	.0										567	570	1105	739
4/ 73	.5	3.3	2.9	1.3	.5	.1		.2										476	478	930	1038
2/ 71	.7	1.5	1.8	.7	.2	.2												271	272	794	967
1/ 69	.3	1.5	1.9	.3	.1	.0												224	226	532	684
0/ 67	.3	1.0	1.4	.2	.1													158	158	400	570
6/ 65	.3	.8	.3		.1													80	81	245	405
4/ 63	.2	.9	.2	.	.1													80	80	132	452
2/ 61		.1	.1	.0														13	13	51	161
1/ 59		.1	.0															10	10	15	89
5/ 57																				16	31
5/ 55																				2	9
4/ 53																					9
2/ 51																					6
1/ 49																					2
TOTAL	3.5	17.9	23.8	17.6	9.4	10.7	6.6	6.4	2.1	1.4	.4	.1	.0	.0					5555		5535
																		5535		5535	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	32887095	419031	75.7	14.503	5535							
Dry Bulb	35127831	440005	79.2	7.044	5555			719.4	631.5	326.1	30.1	744
Wet Bulb	29745424	405044	73.2	4.353	5535			682.0	450.0	26.9		744
Dew Point	27519248	389464	70.4	4.560	5535			587.5	289.0	1.6		744

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) | TAEGU AB KO (STATION NAME) | 68-70,74-79 (YEARS) | SEP (MONTH)

 | 0000-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/ 79			.2															1	1		
7 / 77		1.2	3.1	.5														31	31	1	1
/ 75	.3	2.5	1.4	.3	.3													31	31	14	6
4/ 73	.5	1.5	1.4	.9														28	29	38	32
/ 71	.2	3.7	2.	.5	.2	.2												43	43	24	25
/ 69	.8	5.8	4.2	.3	.8													77	77	59	3
/ 67	.8	2.8	6.3	1.7	.2													76	76	58	6
/ 65	.6	6.0	2.9	1.2	.2	.2												72	72	76	4
4/ 63	1.1	11.4	2.2	.9	.2													102	102	5	91
/ 61	.8	6.8	2.0	.5	.2													66	66	1	83
/ 59		5.7	2.	.6														54	55	57	1
/ 57	.2	2.8	1.7	.3	.2													33	33	51	51
/ 55		1.8	.8	.5														20	20	30	36
4/ 53		1.4	.5	.2														13	14	27	31
/ 51		.2	.2															2	2	14	23
/ 49		.2																1	1	8	19
/ 47																				3	4
/ 45																					7
4/ 43																					2
2/ 41																					1
TOTAL	5.1	53.7	31.6	8.3	2.0	.3												650	653	650	65

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4914497	56295	86.6	7.744	650							
Dry Bulb	2847088	42946	65.8	5.894	653			39.7	12.7			9
Wet Bulb	2632077	41181	63.4	5.958	650			26.9	7.3			9
Dew Point	2501481	40103	61.7	6.480	650			21.3	5.4			5

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | SEP MONTH

 23.0-05.0 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
7 / 77		.4	1.2	.4														14	14		
6/ 75	.1	2.7	.9	.4	.1													29	29	8	1
4/ 73	.7	2.5	1.3	.1														32	32	35	27
/ 71	.7	2.2	1.0		.1													28	28	[illegible]	35
/ 69	1.8	4.3	1.3	.7														55	55	54	26
6/ 67	2.2	6.5	4.4	.7	.1													95	95	67	68
6/ 65	1.9	6.2	1.8	.3														69	69	64	60
4/ 63	1.8	8.6	1.8	.1														83	84	83	64
/ 61	1.6	7.[illegible]	.7	.7														68	69	86	67
/ 59	1.2	9.2	1.3		.1													80	80	58	9[illegible]
/ 57	1.2	4.1																36	36	69	59
5/ 55	.7	2.7	.6															27	27	46	52
4/ 53	.6	3.[illegible]	.9	.3														32	32	25	39
/ 51	.1	1.2	.4															12	12	22	20
/ 49	.1	1.3																10	10	19	27
/ 47		.7																5	5	1[illegible]	12
/ 45																				3	13
/43																					[illegible]
/41																					1
TOTAL	15.0	62.7	17.8	4.0	.6														676		675
																		675		675	

Element (X)	ΣX^2	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature ≤0 F	≤32 F	≥67 F	≥73 F	≥80 F	≥93 F	Total
Rel. Hum.	5553374	61[illegible]44	90.4	6.979	675							
Dry Bulb	2797607	43265	64.0	6.507	676			33.7	10.0			9[illegible]
Wet Bulb	2650855	42075	62.3	6.466	675			25.3	5.7			9[illegible]
Dew Point	2556007	41287	61.2	6.743	675			20.9	3.7			9[illegible]

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) | TAEGU AB KO (STATION NAME) | 63-70, 74-79 (YEARS) | SEP (MONTH)

 0600-0800 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 79			.2	.3														3	3		
7 / 77		.3	1.9	.8														19	19		
6/ 75	.2	2.0	.6	.9														24	24	8	3
4/ 73	.6	2.6	1.2	.3														31	31	30	24
/ 71	.8	2.6	1.0			.2	.3											37	37	32	33
/ 69	1.1	4.7	1.4	.8	.3													53	53	47	25
/ 67	.9	2.9	3.3	.9	.2													53	53	56	50
6/ 65	2.	6.0	2.6	.6														73	73	53	55
4/ 63	2.5	8.4	2.2	.2	.2													86	86	79	71
/ 61	1.1	6.8	.5	.6	.2													59	61	25	6
/ 59	1.9	7.0	2.8	.6	.2													80	80	60	102
/ 57	1.2	3.3	.3	.2	.3													34	34	58	55
5 / 55	.9	3.3	.3															29	29	41	44
4/ 53	.6	2.2	.6	.2														23	23	35	36
/ 51	.3	2.3	.5	.2														21	21	16	26
/ 49		1.9	.2															13	13	28	21
/ 47	.2	.6	.2															6	6	14	20
/ 45		.2																1	1	3	11
4/ 43																					4
2/ 41																					5
TOTAL	14.3	57.1	20.5	6.5	1.2	.2	.3											645	647	645	645

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5193822	57571	89.3	8.393	645							
Dry Bulb	2666166	41294	63.8	6.885	647			30.6	10.7	.1		9
Wet Bulb	2502966	39944	61.9	6.744	645			24.1	5.3			9
Dew Point	2399179	39271	60.6	7.090	645			18.8	3.8			9

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) TAEGU AB KO (STATION NAME) 68-70,74-79 (YEARS) SEP (MONTH)

 09 00-11 00 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
8/ 87					.1	.3												3	3		
6/ 85				.1	.4	.4	.1											8	8		
4/ 83				1.2	.9	.1	.1											16	16		
2/ 81			.4	1.3	.9	.9	.1	.1										26	26		
/ 79			1.3	1.3	2.1	1.0												40	40	8	
7 / 77		.7	1.6	2.8	4.2	1.3	.6											76	76	17	6
5/ 75	.3	.1	2.2	3.3	2.1	1.3	.6		.1									68	69	36	28
4/ 73		.7	2.5	2.8	1.9	1.5	.9	.4										73	75	71	42
/ 71	.4	1.8	4.8	2.7	3.1	1.3	.6											98	98	67	39
/ 69	.1	.7	4.3	2.2	2.5	.6	.3											73	74	89	48
/ 67	.6	.9	4.6	1.8	1.6	.1												65	65	79	80
6/ 65	.7	1.5	1.2	2.4	.6			.1										44	44	92	68
4/ 63	.1	1.5	1.8	1.2	.9	.3	.1											40	40	94	89
2/ 61	.1	.4	1.0	.7		.3												18	18	63	69
/ 59		.6	.7	.7	.1	.1												16	16	41	77
/ 57		.1	.3	.1														4	4	22	46
5/ 55																				19	36
4/ 53																				6	26
2/ 51																				3	18
1/ 49																				1	13
/ 47																					2
/ 45																					4
4/ 43																					3
2/ 41																					2
TOTAL	2.5	9.3	26.8	25.4	21.6	9.9	3.6	.7	.1									668	672	668	668

Element (X)	Σx^2	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3765675	49563	74.2	11.505	668							
Dry Bulb	3508633	48393	72.0	5.942	672			73.7	41.9	9.0		9
Wet Bulb	2971983	44399	66.5	5.638	668			44.1	12.4	.1		9
Dew Point	2689651	42151	63.1	6.696	668			28.7	7.5			9

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
66-70,74-79 — YEARS
SEP — MONTH

1200-1400 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 91							.2	.2	.2									3	3		
/ 89						.6	.6	.2	.3									11	11		
8/ 87					.2	.9	1.1	.3		.2								17	17		
6/ 85					.5	1.2	.5	1.4	.3	.3								27	27		
4/ 83				.9	1.7	2.0	2.7	1.2	.3	.2		.2						60	60		
/ 81			.2	.9	1.4	3.6	3.6	4.2	1.4	.2								102	102		
/ 79			.6	.6	2.1	2.7	2.0	1.1	.8									65	65	16	
7/ 77		.2	.2	2.7	3.3	3.9	3.5	2.4	1.1									114	114	25	6
6/ 75		.5	1.1	1.1	1.7	2.6	3.5	1.1										75	75	44	19
4/ 73		.6	.9	1.2	2.3	2.1	1.7	1.4										67	67	60	31
/ 71		1.4	.9	.5	2.1	.6	.9	.3		.2								45	46	87	52
2/ 69		.8	.6	.8	1.2	.5	.3			.2								28	28	88	49
/ 67		.3	.9	.5	.2	.6	.5	.2										20	20	98	69
6/ 65			.3	.3	.3	.2												7	7	78	63
4/ 63		1.1	.5	.2		.2	.2											13	13	82	64
2/ 61		.3		.2		.3												5	5	45	78
/ 59						.2												1	1	23	83
/ 57																				9	55
5/ 55																				4	38
4/ 53																				4	24
2/ 51																				3	21
/ 49																					13
/ 47																					4
4/ 45																					4
2/ 41																					4
/ 39																					1
3/ 37																					1
6/ 35																					1
TOTAL		5.0	6.1	9.7	16.8	22.1	21.1	13.8	4.2	1.1		.2						660	661	660	660

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2610981	40595	61.5	13.157	660							
Dry Bulb	3985863	51186	77.4	5.794	661			86.5	73.7	34.9		9
Wet Bulb	3082542	44972	68.1	5.252	660			56.2	19.0	.7		9
Dew Point	2624401	41363	62.7	6.983	660			28.1	7.6			9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
66-70,74-79 — YEARS
SEP — MONTH

1500-1700 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
4/ 93								.1	.1										2	2		
-/ 91						.1	.1	.1	.1										4	4		
-/ 89						1.0		.7											12	12		
8/ 87					.7	.4	1.5	.9	.1		.7								30	30		
6/ 85			.1	.1	.6	2.5	1.9	1.6	.6	.4	.6								58	58		
4/ 83			.1	1.3	.7	1.5	1.6	1.2	.4	1.2	.3								57	57		
-/ 81			.7	1.2	.7	2.7	3.6	2.8	1.5	.1									90	92	3	
-/ 79			.6	.9	1.9	1.2	2.8	1.3	.6	.1									64	64	20	1
7-/ 77			1.2	1.9	1.6	3.0	4.0	3.0	1.6	.1									111	111	27	16
6/ 75		.4	1.2	1.2	1.2	2.2	1.2	1.2		.1									59	59	50	17
4/ 73		.4	.6	1.2	1.3	3.0	2.2	.7	.1										65	66	63	34
-/ 71	.3	.6	1.0	.1	1.2	.4	.9	.1		.3									34	34	72	37
-/ 69		1.3	1.5	.9	.7	1.2	.4			.1									42	42	95	50
6-/ 67	.1	.4	.4	.7	.3	.1	.1	.1											17	17	100	69
6/ 65		.3	.6	.1	.1	.3	.1												11	11	85	54
4/ 63		1.0	.1																8	8	71	56
-/ 61		.3			.1														3	3	54	71
-/ 59					.1	.1													2	2	23	91
5-/ 57																					7	49
5-/ 55																					1	36
4/ 53																					6	33
2/ 51																					2	19
5 / 49																						18
4-/ 47																						6
46/ 45																						4
4/ 43																						3
2/ 41																						1
3-/ 37																						2
TOTAL	.4	4.9	8.4	9.9	11.7	20.0	20.8	14.2	5.4	2.7	1.6								669	672	669	669

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2612154	40626	60.7	14.737	669							
Dry Bulb	4123259	52479	78.1	6.101	672			86.8	74.3	38.8	.3	9
Wet Bulb	3153359	45785	68.4	5.462	669			56.5	21.9	1.9		9
Dew Point	2670503	41973	62.7	7.455	669			30.1	9.1			9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
SEP — MONTH
PAGE 1
1800-2000 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 91						.1												1	1		
[illegible] / 89							.1											1	1		
8/ 87						.3	.1											3	3		
6/ 85					.4	.4	.3			.1								9	9		
4/ 83			.1	.9	.3	.3	.4	.1										15	15		
2/ 81				1.5	1.[illegible]	1.2	.3	.7	.6									36	36	1	
[illegible] / 79		.1	1.3	1.3	1.6	1.8	.7	.6	.1									52	52	4	
7 / 77		.7	1.6	3.3	2.8	1.8	1.[illegible]											76	76	15	4
6/ 75		.4	1.3	2.4	3.4	2.2	.6	.1	.1									72	72	39	2[illegible]
4/ 73		.3	2.5	2.8	2.1	1.8	1.3	.3	.1									76	77	36	2[illegible]
[illegible] / 71	.1	1.5	2.1	2.8	4.9	1.2	.1	.1										87	88	56	22
/ 69	.6	2.4	1.3	3.1	2.8	1.8	.4		.1									88	88	86	48
[illegible] / 67	.1	1.6	3.1	1.6	1.6	1.6	.1											67	67	98	69
6/ 65	.4	.7	1.6	1.5	2.1	.3	.1											46	46	89	59
4/ 63	.1	.9	.9	.6	.7	.4	.1											26	26	102	94
2/ 61	.1	.1	.9	.4	.3	.1												14	14	56	69
[illegible] / 59	.1	.3	.1		.1	.1												6	6	51	9[illegible]
[illegible] / 57					.1													1	1	32	51
56/ 55																				5	34
54/ 53																				6	33
52/ 51																				2	23
5[illegible] / 49																				2	11
[illegible] / 47																					[illegible]
46/ 45																					4
44/ 43																					[illegible]
42/ 41																					4
[illegible] / 39																					1
TOTAL	1.8	9.2	17.5	22.2	24.4	15.5	6.1	2.1	1.2	.1									678		676
																		676		676	

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3513033	47943	70.9	12.929	676							
Dry Bulb	3616066	49378	72.8	5.690	678			77.7	45.4	12.2		9[illegible]
Wet Bulb	3001950	44900	66.4	5.401	676			44.1	11.6	.1		9[illegible]
Dew Point	2670774	42240	62.5	6.820	676			25.8	7.3			9[illegible]

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 68-70,74-79 YEARS | SEP MONTH

 2100-2300 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/ 81			.4	.3														5	5		
/ 79		.3	1.6	.4	.1													17	17		
7 / 77		2.1	2.5	1.0	.3													40	40	5	2
6 / 75		1.0	2.1	1.3	.6	.1												35	35	11	18
4 / 73	.1	.4	3.1	2.5	.7													47	47	25	29
/ 71	.3	1.6	3.5	1.9	1.0													57	58	33	17
/ 69	.6	3.4	6.8	2.1	.7													92	92	55	33
6 / 67	.4	2.7	7.4	3.1	1.6	.3												105	105	81	63
6 / 65	1.3	3.4	5.6	1.8	.6	.1		.1										86	86	103	89
4 / 63	.9	4.3	4.7	1.6	.9													84	85	108	113
/ 61	.7	1.3	3.7	.3	.6													45	46	34	62
/ 59	.3	1.3	3.1	1.0	.1	.1												41	41	57	89
/ 57		1.1	.9	.3	.6													19	19	35	49
5 / 55		.1	.1	.3														4	4	39	47
4 / 53																				10	27
2 / 51																				7	21
5 / 49																				4	11
2 / 47																					2
4 / 45																					5
4 / 43																					3
2 / 41																					1
4 / 39																					1
TOTAL	4.4	23.0	45.6	18.0	8.0	.7		.1										677	680	677	677

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4599311	55449	81.9	9.248	677							
Dry Bulb	3166485	46253	68.0	5.481	680			52.8	19.1	1.7		9
Wet Bulb	2836956	43662	64.5	5.580	677			30.6	8.1			93
Dew Point	2648128	42118	62.2	6.419	677			21.5	6.5			93

USAFETAC FORM AIR 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47112 — STATION
TAEGU AB KO — STATION NAME
68-70,74-79 — YEARS
SEP — MONTH

ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-/ 93								•0	•0									2	2		
/ 91						•0	•0	•0	•0									8	8		
/ 89						•2	•1	•1	•0									24	24		
8/ 87					•1	•2	•3	•2	•0	•0	•1							53	53		
6/ 85			•0	•0	•2	•6	•4	•4	•1	•1	•1							132	132		
-/ 83			•0	•5	•5	•5	•6	•3	•1	•2	•0	•0						148	148		
/ 81			•2	•7	•5	1.1	1.0	1.0	•4	•0								259	261	4	
/ 79		•1	•7	•7	1.3	•8	•7	•4	•2	•0								242	242	42	1
7 / 77		•7	1.7	1.7	1.5	1.3	1.1	•7	•3	•0								481	481	90	35
6/ 75	•1	1.2	1.4	1.4	1.2	1.1	•7	•3	•0	•0								393	394	230	113
4/ 73	•2	1.1	1.7	1.5	1.1	1.1	•8	•4	•0									419	424	310	227
/ 71	•4	1.9	2.2	1.1	1.6	•5	•4	•1		•1								429	432	401	237
/ 69	•6	2.9	2.7	1.4	1.1	•5	•2		•0	•0								508	509	563	359
4/ 67	•7	2.3	3.8	1.4	•7	•4	•1	•0										498	498	637	528
6/ 65	•8	3.3	2.1	1.0	•5	•1	•1	•0										408	408	640	473
4/ 63	•8	4.6	1.8	•6	•4	•1	•1											442	444	704	662
2/ 61	•6	2.9	1.1	•4	•2	•1												278	281	578	579
/ 59	•4	3.0	1.3	•4	•1	•1												280	281	370	727
/ 57	•3	1.4	•4	•1	•2													127	127	283	416
5 / 55	•2	1.0	•2	•1														80	80	185	316
4/ 53	•2	•8	•2	•1														68	69	119	249
2/ 51	•1	•5	•1	•0														35	35	69	171
5 / 49	•0	•4	•0															24	24	62	126
3/ 47	•0	•2	•0															11	11	27	55
0 / 45		•0																1	1	6	55
0/ 43																					17
0/ 41																					11
0 / 39																					3
0 / 37																					4
0/ 35																					1
TOTAL	5.4	27.9	21.7	13.1	10.8	8.6	6.5	3.9	1.4	•5	•2	•0						5320	5339	5320	5320

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	32752847	409085	76.9	15.609	5320							
Dry Bulb	26713164	375194	70.3	8.059	5339			482.5	288.5	97.0	.3	72
Wet Bulb	22832688	346918	65.2	6.285	5320			308.2	91.5	2.8		72
Dew Point	20760054	330306	62.1	6.885	5320			195.6	51.2			72

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 68-69,73-79 | OCT

STATION | STATION NAME | YEARS | MONTH

 0030-0230 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
4/ 73				.2														1	1		
-/ 69		.2	.3															3	3		
-/ 67			.6															4	4	2	1
6/ 65		1.1	.6															11	11	3	1
4/ 63		3.8	1.4	.3	.2	.2												37	37	16	7
-/ 61	.5	3.0	.6	.5	.3													31	31	33	27
-/ 59	1.0	5.1	2.4	1.7	.2													65	65	33	35
-/ 57	.6	5.6	2.1	.5	.6													59	59	41	39
5/ 55	.5	4.9	1.7	.6		.2												50	50	62	39
4/ 53	.5	4.1	1.0	.5		.2												39	39	59	45
2/ 51	.3	4.1	1.3	.6	.2													41	41	40	47
5/ 49	.6	8.7	3.7	.2	.5													86	87	68	55
-/ 47	.5	7.1	1.3	.2	.3													59	59	75	59
4/ 45	.8	6.2	1.1	.6														55	55	63	86
4/ 43	1.1	5.7	.6	.2														48	48	64	40
2/ 41	1.7	1.6	1.1															28	28	41	68
4/ 39	.2	.8																6	6	13	24
3/ 37	.3	.6																6	6	12	13
-/ 35		.2																1	1	4	16
3/ 33																				1	12
-/ 31																					3
TOTAL	.6	62.9	19.8	6.0	2.2	.5													631		63
																		630		630	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4737142	54293	86.2	9.662	630							
Dry Bulb	1771699	33149	52.5	6.929	631			1.2	.1			93
Wet Bulb	1630521	31769	50.4	6.732	630			.3				93
Dew Point	1510952	30512	48.4	7.265	630		.4	.1				93

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 68-69,73-79 | OCT
STATION | STATION NAME | YEARS | MONTH

 0300-0500
HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
6 / 67		.3	.5															5	5	2	
6/ 65		.3																2	2	1	2
4/ 63		2.6																17	17	9	1
/ 61	.6	2.6	.3	.3														25	25	20	23
/ 59	.8	6.9	1.2	.2														59	59	24	25
/ 57	1.1	4.6	1.8	.3	.2													52	52	50	46
5 / 55	1.1	4.9	1.2	.5	.5													53	53	48	34
4/ 53	.3	3.7	.9	.6	.5													39	39	52	42
2/ 51	.9	4.4	.5	.3														40	41	51	39
5 / 49	.6	5.4	1.7		.3													52	52	43	55
/ 47	.8	6.6	1.2		.6													60	60	67	38
4 / 45	2.8	11.8	.6															99	99	91	9
4/ 43	2.3	3.8	.9	.2	.2													48	48	63	75
2/ 41	2.9	4.4	1.4	.2														58	58	55	69
4 / 39	1.1	2.3	.2															23	23	36	43
3 / 37	.6	1.1																11	11	24	28
/ 35	.3	.9																8	8	10	13
3 / 33	.3																	2	2	7	13
2/ 31																					11
/ 29																					4
/ 25																					2
TOTAL	15.4	66.6	12.4	2.5	2.1														654		653
																		653		653	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5281342	58413	89.4	9.321	653							
Dry Bulb	1678743	32805	50.2	7.133	654			.7				93
Wet Bulb	1576444	31754	48.6	7.040	653			.3				93
Dew Point	1485831	30761	47.1	7.509	653		2.4					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47612 — STATION
TAEGU AB KO — STATION NAME
68-69,73-79 — YEARS
OCT — MONTH

0600-0800 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31					
[illegible] / 67		.5																	3	3	3	
[illegible] / 65		.6																	4	4	3	3
4 / 63	.3	1.6	.3		.3														16	16	4	6
/ 61	.6	3.0			.2														24	24	16	11
/ 59	1.0	4.5	.3	.5															39	39	27	24
/ 57	1.0	3.4	1.6	.3	.2	.2	.2												42	42	33	33
5 / 55	1.4	4.8	1.1		.3														48	48	32	29
4 / 53	1.3	4.3	1.0	.2	.5														45	45	59	4[illegible]
2 / 51	1.3	3.8	1.[illegible]	.2	.8														44	44	41	37
5 / 49	.8	3.7	1.[illegible]	.3															36	37	45	5[illegible]
4 / 47	2.1	4.6	.8	.3															49	51	53	4[illegible]
4 / 45	4.8	9.6	.5	.3															96	96	84	77
4 / 43	2.9	5.8	.2	.2															56	56	76	66
2 / 41	2.9	5.4	.5	.8															60	60	54	76
4 / 39	.6	2.9	.2																23	23	32	43
3 / 37	2.1	1.1	.2																21	21	32	37
[illegible] / 35	.6	1.3																	12	12	16	19
3 / 33	.6	.3																	6	6	14	18
[illegible] / 31																						7
[illegible] / 29																						3
[illegible] / 27																						2
[illegible] / 25																						2
[illegible] / 23																						1
TOTAL	24.4	61.4	8.7	3.0	2.2	.2	.2													627		624
																			624		624	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	5128188	56218	90.1	10.083	624							
Dry Bulb	1553530	30864	49.2	7.397	627			.4				93
Wet Bulb	1456551	29809	47.8	7.228	624			.4				93
Dew Point	1376105	28911	46.3	7.666	624		2.2					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | OCT MONTH

0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
/ 79						.2												1	1		
7 / 77					.3	.2												3	3		
6/ 75				.2	.3													3	3		
4/ 73				.8	.3	.3												9	9		
/ 71			.3	.2	.8	.2												9	9		
/ 69			.5	.5	1.0	.6												16	16	5	
/ 67		.5	1.1	1.3	1.9	1.1	.3											39	39	12	3
6/ 65	.3	1.0	1.9	1.8	2.1	.5	.6	.2										52	52	13	5
4/ 63	.2	.8	3.0	2.5	2.9	3.5			.2									82	82	25	19
/ 61	.5	1.6	2.2	2.9	2.7	.5	.2	.2										67	67	48	18
/ 59	.8	3.5	2.9	.7	1.6	.5	.2	.2										96	96	66	50
/ 57		1.3	3.2	1.4	1.6	.6	.2	.2										53	53	66	41
/ 55	.2	1.8	2.2	2.1	1.1	.6												50	50	82	41
4/ 53	.2	2.4	3.8	1.1	1.3	.3												55	55	86	53
/ 51	.2	1.4	2.7	.8	.3	.2	.2											36	36	55	69
/ 49	.2	1.1	2.2	1.0	.3	.2												31	31	62	86
/ 47	.5	.8	.8	.2	.2													15	15	51	55
/ 45		.6			.2													5	5	30	61
4/ 43	.3	.2		.2														4	4	18	49
/ 41	.2																	1	1	4	27
/ 39																				2	12
/ 37		.2																1	1	3	14
/ 35																					7
3 / 33																					3
/ 31																					6
/ 29																					4
/ 27																					2
/ 25																					2
/ 23																					1
TOTAL	3.3	17.0	26.9	22.5	18.5	9.4	1.6	.6	.2										628		628
																		628		628	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3419767	45523	72.5	13.826	628							
Dry Bulb	2250419	37371	59.5	6.507	628			11.8	2.4			97
Wet Bulb	1890725	34253	54.5	5.986	628			2.5				93
Dew Point	1617008	31528	50.2	7.384	628		2.2	.4				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

86/ 85										.1								1	1		
84/ 83								.1	.1									2	2		
82/ 81							.7	1.0	.1									13	14		
80/ 79						.7		.1			.1							7	7		
78/ 77					.1	1.1	2.1	1.4	.4	.4		.1						41	41		
76/ 75				.1	.9	.7	2.4	1.1	.4	.3								42	42		
74/ 73				.4	.1	1.7	3.3	1.9	.3	.1								55	56		
72/ 71			.1	.1	1.4	1.9	3.6	1.3	.4	.3								64	64		
70/ 69			.3	.6	1.4	4.6	2.6	1.3	.6	.1								80	80	16	
68/ 67			.6	1.4	1.4	5.7	3.6	1.1	.9									103	103	37	3
66/ 65		.1	.9	1.3	1.3	3.0	2.7	1.4		.4								74	74	25	4
64/ 63	.1	.3	.9	.9	2.4	2.1	1.7	.4	.4									65	65	68	23
62/ 61		.4	.6	1.0	3.6	.7	.6	.1										49	49	98	19
60/ 59	.3	2.7	.3	1.9	1.3	1.6	.9	.3										64	64	118	55
58/ 57	.1	.1	.1	.1	.7	.3		.3										13	13	106	54
56/ 55		.1		.4	.1	.1												6	6	80	54
54/ 53			.4	.1			.1											5	5	76	65
52/ 51		.4	.1			.1												5	5	44	72
50/ 49	.1	.6	.1	.1	.1		.3											10	10		93
48/ 47				.1														1	1	22	59
46/ 45																				2	62
44/ 43																				3	28
42/ 41																				3	5
40/ 39																				2	22
38/ 37																					1
36/ 35																					
34/ 33																					
32/ 31																					
30/ 29																					
28/ 27																					
26/ 25																					1
24/ 23																					2
TOTAL	.7	4.9	4.4	8.4	14.7	24.4	24.6	12.0	3.7	1.9	.1	.1						700	702	700	700

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.	2295161	38805	55.4	14.352	700	≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Dry Bulb	3241075	47487	67.6	6.410	702			54.3	21.6	2.4		93
Wet Bulb	2378082	40634	58.1	5.260	700			5.7				93
Dew Point	1809193	35205	50.3	7.434	700		2.0	.3				93

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | OCT MONTH

 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
86/ 86								.1	.1	.1	.1							4	4		
84/ 84								.4	.4									6	6		
82/ 82							.4	.4		.1	.1	.3						10	10		
80/ 80						.6	.3	.3	.9	.3	.4								19		
78/ 78					.3	.6	2.3	2.9	1.5	1.0								59	59		
76/ 76				.1	.3	.9	1.9	1.9	.4	.4	.4							44	44		
74/ 74			.3	.1	.9	.9	4.3	1.8	1.3	.3	.3							69	69		
72/ 72		.1		.3	1.6	1.6	4.0	2.3	1.2	.1								77	78	1	
70/ 70				.7	.7	2.2	3.1	1.9	1.2	.7								72	72	23	1
68/ 68			.4	.9	2.1	2.8	2.1	2.8	.7	.3	.1							83	83	13	2
66/ 66		.4	.4	.9	1.9	2.1	2.2	1.0	.3	.1								64	64	37	3
64/ 64	.1	.3	.6	1.0	2.1	2.2	1.3	.3	.3									56	56	72	25
62/ 62		.6	1.0	1.3	1.2	1.3	.3	.1										40	40	88	40
60/ 60		1.9	.3	.9	.7	1.6		.6										41	41	113	45
58/ 58	.6	.1		.3	.4	.3	.1											13	13	117	50
56/ 56			.1	.4	.3		.1											7	7	72	45
54/ 54		.1		.1	.1	.1												4	4	95	61
52/ 52		.3	.4	.4														8	8	43	79
50/ 50							.1											1	1	24	83
48/ 48		.3					.1											3	3	9	49
46/ 46																				9	56
44/ 44	.1					.1												2	2	3	47
42/ 42																					46
40/ 40																				1	27
38/ 38																					19
36/ 36																				2	5
34/ 34																					5
32/ 32																					5
30/ 30																					3
28/ 28																					5
26/ 26																					2
24/ 24																					1
TOTAL	.9	4.3	3.7	7.6	12.6	17.3	22.7	17.0	8.4	3.7	1.6	.3						682	683	682	682

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	2066594	36038	52.8	15.437	682			60.5	28.7	3.0		93
Dry Bulb	3264691	46997	68.8	6.725	683			5.0				93
Wet Bulb	2342166	39804	58.4	5.290	682							93
Dew Point	1736665	34013	49.9	7.698	682		2.2	.4				93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-79 — YEARS
OCT — MONTH

1800-2100 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 81							.1	.1										2	2		
/ 79						.1												1	1		
7[illegible] / 77					.1	.3		.1										4	4		
[illegible] / 75					.3	.4	.4											8	8		
[illegible] / 73			.1	.3	.3	.7	.1	.1	.1									13	13		
[illegible] / 71			.1	.1	1.8	.7	.7	.1		.1								26	26		
[illegible] / 69			.4	1.2	1.3	1.3	.3	.1										32	32	5	1
[illegible] / 67		.3	1.2	.7	2.5	1.3	.3											43	43	9	
[illegible] / 65		.6	.9	2.8	2.2	1.3	.6	.1										58	60	16	3
[illegible] / 63	.3	.4	1.5	3.4	3.7	2.8	.7		.1									88	88	45	16
[illegible] / 61	.3	1.2	1.6	4.7	4.2	.4												85	85	47	26
[illegible] / 59	.4	2.8	4.4	6.4	2.9	1.5	.1											127	128	78	47
[illegible] / 57	.6	1.5	1.8	3.2	1.8	.6	.3	.1										67	67	88	53
5[illegible] / 55		.6	1.3	2.9	.9	.3	.1											42	43	102	55
[illegible] / 53		.4	1.5	1.9	.3	.4												31	31	95	61
[illegible] / 51		.4	1.3	1.0	.4													22	22	59	64
5[illegible] / 49		.3	.9	.6	.3													14	14	60	83
[illegible] / 47		.1	.9	.1														8	8	30	62
4[illegible] / 45		.3	.3															4	4	27	78
[illegible] / 43		.4	.1															4	4	13	39
[illegible] / 41				.3	.3	.1												5	5	4	45
[illegible] / 39																				1	[illegible]
[illegible] / 37																					9
[illegible] / 35																				2	4
[illegible] / 33																				3	4
[illegible] / 31																					3
[illegible] / 29																					3
[illegible] / 27																					3
[illegible] / 21																					1
[illegible] / 19																					1
[illegible] / 17																					1
TOTAL	1.6	9.4	18.3	29.7	23.2	12.4	3.9	1.0	.3	.1									688		684
																		684		684	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3301566	46676	68.2	13.055	684							
Dry Bulb	2609631	42135	61.2	6.516	688			17.4	3.8	.3		93
Wet Bulb	2113495	37811	55.3	5.845	684			1.9				93
Dew Point	1762810	34370	50.2	7.237	684		1.6	.1				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) OCT (MONTH)

 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 69		.1	.7	.1	.1													8	8		
6[illegible] / 67			1.9	.6	.1		.1											19	19	2	1
[illegible]6/ 65		1.0	1.3	.4	.4													22	22	11	1
4/ 63	.1	3.4	3.7	1.2	.9													63	63	27	16
[illegible]/ 61	.3	1.0	1.5	1.5	.1													30	31	39	25
[illegible] / 59		6.0	4.2	2.7	.1													87	87	40	42
[illegible]/ 57	.4	4.5	4.6	2.8	.3	.1												86	86	60	42
5[illegible]/ 55		3.9	4.2	1.8	.4													69	69	73	5[illegible]
[illegible]4/ 53	.3	3.3	6.0	1.2	.7	.1												78	80	72	4[illegible]
[illegible]2/ 51	.1	3.9	3.7	1.8	.1													65	65	83	6[illegible]
5 / 49		3.0	3.7	1.0	.7													57	58	84	64
[illegible]/ 47	.3	2.1	1.6	.1	.1													29	29	55	6[illegible]
4[illegible] / 45	.1	3.1	.7	.1														28	28	56	64
[illegible]4/ 43		1.3	.3	.1														12	12	33	41
[illegible]2/ 41		.9	.7	.1														12	12	19	43
4 / 39		.3	.1	.3														5	5	7	26
3[illegible]/ 37				.1														1	1	5	21
[illegible]/ 35																				2	8
3 / 33																				2	5
2/ 31																				1	2
[illegible] / 29																					1
[illegible]/ 25																					1
24/ 23																					1
2/ 21																					2
TOTAL	1.8	37.9	39.2	16.2	4.5	.3	.1											671		675		671

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4405204	53956	80.4	9.965	671							
Dry Bulb	2114977	37539	55.6	6.365	675			3.7				93
Wet Bulb	1869725	35167	52.4	6.304	671		.1	.3				93
Dew Point	1681895	33247	49.5	7.182	671		1.0	.1				93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

42212 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | OCT MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
6/ 85								.0	.0	.0	.0							5	5		
4/ 83								.1	.1									8	8		
1/ 81							.2	.2	.0	.0	.0	.0						25	26		
/ 79						.2	.0	.1	.1	.0	.1							28	28		
7 / 77					.1	.3	.6	.6	.2	.2		.0						107	107		
6/ 75				.1	.2	.3	.6	.4	.1	.1	.1							97	97		
4/ 73			.1	.2	.2	.5	1.0	.5	.2	.1	.0							147	148		
1/ 71		.0	.1	.1	.2	.6	1.1	.5	.2	.1								176	177	1	
/ 69		.0	.3	.4	.6	1.1	.8	.4	.2	.1								211	211	49	7
1 / 67		.2	.8	.6	1.0	1.4	.8	.5	.2	.0	.0							299	299	73	9
6/ 65	.1	.6	.8	.9	1.0	.9	.8	.4	.1	.1								287	289	109	23
4/ 63	.2	1.6	1.4	1.2	1.6	1.4	.5	.1	.1									424	424	266	113
1/ 61	.3	1.7	1.0	1.5	1.6	.4	.1	.1										351	352	379	169
/ 59	.5	4.1	2.1	2.5	.9	.7	.2	.1										578	579	499	323
/ 57	.1	2.6	1.9	1.1	.7	.3	.1	.1										385	385	561	358
5 / 55	.4	2.6	1.5	1.1	.5	.2	.0											325	326	551	347
4/ 53	.3	2.2	1.8	.7	.4	.2	.0											296	298	554	415
2/ 51	.3	2.3	1.4	.6	.2	.0	.0											261	262	416	465
5 / 49	.3	2.8	1.6	.4	.3	.0	.1											287	290	406	589
/ 47	.5	2.6	.8	.1	.2		.1											224	226	362	444
4 / 45	1.0	3.9	.4	.1	.0													287	287	362	574
4/ 43	.8	2.1	.3	.1	.3	.0												174	174	273	385
2/ 41	.9	1.5	.5	.2	.0	.0												164	164	180	447
4 / 39	.2	.8	.1	.0														57	57	94	217
3 / 37	.4	.4	.0	.0														40	40	76	147
/ 35	.1	.3																21	21	36	80
34/ 33	.1	.0																8	8	27	69
2/ 31																				1	40
/ 29																					20
0/ 27																					19
0/ 25																					8
0/ 23																					5
2/ 21																					5
/ 19																					1

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 66-69,73-79 YEARS | OCT MONTH

PAGE 2 | ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
-/ 17																					1
-/ 15																					1
TAL	7.3	32.3	16.6	12.1	10.2	8.3	6.9	4.0	1.6	.7	.2	.1						5272	5288	5272	5272

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	30634964	389916	74.0	18.463	5272							
Dry Bulb	18484765	378347	58.3	9.772	5288			155.6	59.0	5.9		744
Wet Bulb	15257739	281001	53.3	7.291	5272		.1	16.9				744
Dew Point	12980459	258547	49.3	7.556	5272		14.1	1.6				744

USAFETAC FORM 0-26-5 (OL A) 84 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47[illegible]12 | TAEGU AB KO | 68-69,73-79 | NOV
STATION | STATION NAME | YEARS | MONTH

 0000-0[illegible]
HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
4/ 63			.2															1	1		
[illegible]/ 61		.2																1	1		
[illegible] / 59	.3																	2	2	4	2
[illegible] / 57	.2	1.1	.6	.2														13	13	2	[illegible]
5[illegible]/ 55	.3	1.2	.6	.2														15	15	8	6
4/ 53	1.2	1.5	.8	.2														24	24	23	15
2/ 51	1.7	2.2	.3	.3														29	29	26	23
[illegible]/ 49	.3	2.2	.2	.5	.2	.2												22	22	26	13
[illegible]/ 47	.3	4.6	.8	.3	.3													41	41	25	25
[illegible]/ 45	1.1	5.6	1.1	.9														56	56	52	46
[illegible]/ 43	1.4	2.9	1.4	1.9		.2												50	50	41	41
2/ 41	2.8	4.3	2.9	.5	.5													71	71	48	46
[illegible]/ 39	.6	5.[illegible]	2.2	.6	.2													55	55	44	[illegible]5
[illegible]/ 37	.5	4.2	1.1	1.1														44	45	61	34
[illegible]/ 35	.3	3.7	1.5	.8	.2													42	43	48	[illegible]5
34/ 33	.6	3.3	1.9	.8														42	42	47	50
[illegible]/ 31	1.2	3.1	2.8	.9														[illegible]2	53	55	48
[illegible] / 29	.2	2.9	1.9	.3														34	34	38	44
[illegible] / 27		3.7	1.5															34	34	50	22
[illegible]/ 25		1.1	.3															9	9	26	26
[illegible]/ 23		.8	.2															6	7	12	49
2/ 21		.5																3	3	6	[illegible]5
[illegible] / 19																				4	[illegible]9
[illegible]/ 17																					11
[illegible]/ 15																					11
[illegible]/ 13																					[illegible]3
[illegible]/ 11																					[illegible]
[illegible] / 9																					4
[illegible]/ 7																					1
TOTAL	13.0	54.0	22.1	9.3	1.2	.3													650		646
																		646		646	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4406121	52577	81.4	14.030	646							
Dry Bulb	1099335	26185	40.3	8.279	650		19.4					9[illegible]
Wet Bulb	987524	24650	38.2	8.530	646		26.6					9[illegible]
Dew Point	854332	22478	34.8	10.580	646		37.9					9[illegible]

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-79 — YEARS
NOV — MONTH

0330-0930 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
≥ 61		.2																1	1		
59		.3																2	2	1	1
57	.2	.8	.3															8	8	3	3
55	.3	1.1	.2															10	10	10	4
53	.8	1.7	.2															17	17	14	15
51	2.3	1.8	.6		.3													30	30	25	17
49	1.2	1.4	.5		.2													21	21	24	29
47	.8	3.1	.8	.3														32	32	26	18
45	.8	4.1	.8	.6	.2													42	43	37	39
43	.6	3.8	.6	.2														34	34	31	18
41	4.1	3.5	2.3	.5	.2													67	67	53	65
39	1.5	4.3	1.4	.5	.2													49	52	37	24
37	3.1	5.2	.8	.9	.5													68	69	61	33
35	1.1	2.9	1.7	1.1														44	44	51	52
33	1.7	3.5	1.8	.8	.2													52	53	47	48
31	1.1	3.5	3.4	.3														54	54	55	41
29	.5	3.7	1.5	.8														42	42	53	32
27	1.7	2.5	2.3															40	40	47	36
25	1.2	2.3	.2															22	22	39	33
23	.2	.9	.5															10	10	24	53
21		.5	.2															4	4	4	26
19		.2																1	1	6	22
17		.2																1	1	2	13
15																				1	14
13																					1
11																					4
9																					4
7																					2
TOTAL	22.7	50.8	19.2	5.8	1.4													651	657	651	651

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	4698558	54508	83.7	14.391	651							
Dry Bulb	1.25583	25377	38.6	8.317	657		23.8					9
Wet Bulb	933264	23998	36.9	8.649	651		31.9					9
Dew Point	820267	22823	33.8	10.759	651		40.2					9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMAR

47212 — STATION
TAEGU AB KO — STATION NAME
65-69,73-79 — YEARS
NOV — MONTH
PAGE 1
0600-08 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Po
4/ 63		.3																2	2		
./ 61																				2	
./ 59	.2		.2	.2														3	3	1	
/ 57		1.1	.6	.2														12	12		
5 / 55	.3	.2	.2															4	4	1	
4/ 53	.6	1.9																16	16	17	
./ 51	1.1	1.4		.2														16	16	14	1
5 / 49	1.3	1.3	.6															20	20	19	1
./ 47	1.3	1.1	.6	.6														23	23	18	1
4 / 45	1.4	3.1	.8	.6														37	38	25	2
4/ 43	1.1	3.5	.9	.5														37	37	37	1
2/ 41	2.7	3.3	2.2	.8	.3													59	59	46	5
4 / 39	2.1	1.9	1.0															31	31	33	2
3 / 37	3.3	3.0	1.4	1.1	.3													57	57	49	3
./ 35	2.5	4.9	1.7	.5	.2													62	63	49	4
3 ./ 33	2.7	2.5	1.4	1.3														50	50	60	4
2/ 31	1.4	2.9	1.7	.8	.2													44	44	50	4
3 / 29	.5	4.8	1.9	.3														47	48	47	3
./ 27	2.4	3.7	1.3	.8														51	52	54	4
./ 25	1.4	1.9	.8															26	26	43	3
2 ./ 23	.8	2.2	.3															21	21	28	5
2/ 21		1.6																6	6	14	2
./ 19		.5																3	3	8	2
1 / 17		.3																2	2	3	2
1 ./ 15																				2	1
1 ./ 13																					1
1 / 11																					
/ 9																					
./ 7																					
./ 5																					
TOTAL	27.3	46.7	17.6	7.6	1.0													629	633	629	6

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4543352	52642	83.7	14.806	629							
Dry Bulb	932282	23662	37.4	8.695	633		28.7					
Wet Bulb	849468	22434	35.7	8.863	629		35.6					
Dew Point	741657	20487	32.6	10.883	629		45.4					

USAFETAC FORM 0-26-3 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 68-69,73-79 | NOV

STATION | STATION NAME | YEARS | MONTH

PAGE 1 | 0900-1100 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
6 / 67					• 5													2	2		
6/ 65				• 2		• 2												2	2		
4/ 63		• 2		• 6	• 2													6	6		
/ 61			• 2	• 5	• 3	• 2	• 2											8	8	2	
/ 59		• 6	• 9	• 5	• 5	• 3	• 2											31	22	2	1
/ 57	• 2	• 5	1.1	1.7	1.1	• 2	• 3											32	32	14	3
5/ 55	• 5	2.0	1.4	1.4	• 6													38	38	16	12
4/ 53	• 3	2.3	1.7	• 9	• 2	• 2	• 2											37	37	34	26
/ 51	• 3	1.4	1.0	1.4	• 3													34	34	36	27
5 / 49	• 3	2.2	1.4	1.4	1.6	• 3	• 2											47	47	47	29
/ 47	• 3	1.7	1.3	1.7	1.4													41	41	40	29
4/ 45	1.1	2.2	2.0	1.6	1.6	• 8	• 2											60	60	41	42
4/ 43	• 6	1.9	1.6	2.7	1.4	• 3												54	54	43	33
2/ 41	1.3	2.5	3.1	3.1	1.1	• 9	• 2											78	78	56	53
4 / 39	• 5	• 9	1.9	1.6	1.9	• 5												46	46	45	28
3 / 37		• 8	1.1	3.1	• 5													35	36	53	36
/ 35	• 6	• 5	2.2	2.2	• 3													37	37	47	35
3 / 33	• 3	1.1	1.6	• 8														24	24	44	25
/ 31	• 2	1.9	• 5	• 6														20	20	56	44
/ 29	• 2	• 5	• 5	• 6														11	11	37	25
/ 27	• 3	• 2	• 3	• 2														6	6	13	49
/ 25			• 2															1	1	9	28
2/ 23																				4	34
2/ 21																				1	26
/ 19																					14
/ 17																					18
1 / 15																					13
4/ 13																					12
1 / 11																					4
/ 9																					3
/ 7																					1
TOTAL	6.9	23.3	24.7	26.7	13.4	3.8	1.3												642		640
																		640		640	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3333277	44803	70.0	17.552	640							
Dry Bulb	1365710	29118	45.4	8.319	642		5.3	.3				9
Wet Bulb	1130646	26362	41.2	8.371	640		16.9					9
Dew Point	883447	22657	35.4	11.283	640		38.1					9

FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 | TAEGU AB KO | 66-69,73-79 | NOV
STATION | STATION NAME | YEARS | MONTH

12[illegible]0-14[illegible]
HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
7 / 77							.3											2	2		
[illegible]6/ 75							.3											2	2		
4/ 73							.2	.2										2	2		
[illegible]/ 71					.2	.2		.3										4	4		
[illegible] / 69						.6	.6	.2										9	9		
[illegible] / 67					.3	1.2	.3	.2		.2								14	14		
6/ 65			.2	.2	1.1	.9	.8	.2										21	21	2	
4/ 63			.2	.9	1.1	3.6		.5										41	41	4	
[illegible]/ 61			.6	.6	2.1	1.5	.9	.5										41	41	5	
[illegible] / 59		.6	1.1	2.9	2.9	2.7	1.5											77	77	14	4
[illegible]/ 57		.5	[illegible].5	1.4	1.4	1.5		.2										42	42	7	4
5 / 55		[illegible].1	.5	.8	2.4	1.8	.2											44	45	7	7
[illegible]/ 53	.3	.3	.5	.9	1.4	1.1	1.1	.3										38	38	13	2
2/ 51		.3	.3	1.5	2.9	1.4	1.4	.3										54	54	41	28
[illegible]/ 49	.3	.6	.5	1.4	2.3	2.1	.9	.2										54	56	51	38
[illegible] / 47		.6	.6	.9	2.7	1.4	.5											44	44	55	33
4 / 45	.2	.5	.3	1.7	2.6	1.4	1.1											50	51	44	56
4/ 43		.3	.3	.9	1.8	1.4												31	31	43	33
[illegible]2/ 41		.3	.9	1.5	3.[illegible]	1.8												50	50	50	39
[illegible] / 39			.2	.8	1.8													18	18	56	29
3 / 37		.3	.2	1.5	.3													15	15	36	41
[illegible] / 35		.3	.2	.8														8	8	43	37
3 [illegible]/ 33		.2	.2		.2													3	3	32	4[illegible]
[illegible]/ 31	.2																	1	1	34	31
[illegible] / 29																				7	26
[illegible]/ 27																				1	36
[illegible] / 25																					22
[illegible]/ 23																					41
[illegible]2/ 21																					16
[illegible] / 19																					27
[illegible]/ 17																					14
1[illegible]/ 15																					13
[illegible]/ 13																					12
1 / 11																					4

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | NOV MONTH

PAGE 2 | 1200-1400 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	.9	5.7	8.0	18.3	30.1	24.4	9.8	2.7		.2								665	669	665	665

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2188184	36704	55.2	15.636	665							
Dry Bulb	1924371	3545	52.9	8.672	669		.1	4.4	.8			9
Wet Bulb	1423447	30270	45.5	8.286	665		5.7					9
Dew Point	970060	24212	36.4	11.546	665		33.0					90

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-79 — YEARS
NOV — MONTH

1500-1700 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
7 / 77							.3			.1								3	3		
6/ 75						.1	.1		.1	.1								4	4		
4/ 73						.1	.6											5	5		
/ 71						.1	.3	.3										5	5		
/ 69						.1	1.3			.1								11	11		
/ 67			.1		.3	1.2	1.2	.3	.1	.1								23	23		
6/ 65		.1	.3	.1	.4	1.0	1.0	.6										25	26	4	
4/ 63		.1	.4	.6	.7	4.5	1.0	.6										55	55	6	1
/ 61		.1	.6	.6	3.2	.6	.9	.1										42	42	6	4
/ 59		.3	.6	1.6	2.5	3.1	.9	.7										66	67	16	3
/ 57	.3	.1	.9	.7	1.5	2.3	.1	.3										43	43	41	9
/ 55		1.3	.3	1.9	2.0	1.9	.6	.4	.1									59	59	33	9
4/ 53	.6	.1	.3	1.0	2.9	2.3	1.3	.4										62	62	90	19
2/ 51	.1	1.2	.4	1.2	1.3	1.2	1.8	.4										52	52	45	23
/ 49	.3	.1	.3	1.2	1.6	2.8	1.5											53	54	57	43
/ 47	.1	.3	.6	1.3	1.2	1.3	.4											36	36	53	38
/ 45		.3	.4	1.6	1.5	2.3	.6											46	46	56	59
4/ 43			.4	1.0	1.2	.9												24	24	39	31
/ 41		.3	.3	1.2	2.0	1.5												36	36	64	55
/ 39		.1	.4	.4	.7													12	12	47	39
/ 37		.3		1.2	.3													12	12	31	38
/ 35	.1	.1	.6	.3														8	8	43	44
/ 33	.1	.1																2	2	31	34
/ 31		.1																1	1	20	39
/ 29																				3	23
/ 27																					40
/ 25																					19
/ 23																					35
/ 21																					24
/ 19																					40
/ 17																					23
/ 15																					7
/ 13																					7
/ 11																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 STATION | TAEGU AB KO STATION NAME | 68-69,73-79 YEARS | NOV MONTH

PAGE 2 | 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	1.6	5.4	7.0	15.9	23.4	27.4	13.9	4.2	.4	.6								685	688	685	685

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	2187513	37103	54.2	16.124	685							
Dry Bulb	2083899	37397	54.4	8.628	688		.1	6.7	1.6			9
Wet Bulb	1521888	31822	46.5	7.982	685		3.0					9
Dew Point	1027397	25425	37.1	11.062	685		31.0					9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-79 — YEARS
NOV — MONTH

1800-2000 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
[illegible] / 71					.1													1	1		
[illegible] / 65					.1													1	1	1	
[illegible] / 63		.3	.6	.9	.1	.3	.1											16	16		
[illegible] / 61		.3	.3	.9	.3			.1										13	13	4	2
[illegible] / 59		.6	1.7	1.3	1.[illegible]	.3												34	34	6	4
[illegible] / 57	.3	.9	1.9	2.2	1.4	.1												47	47	20	4
5[illegible] / 55		.7	2.3	1.6	.9	.3												40	40	21	15
[illegible] / 53	.6	1.6	2.4	3.2	1.[illegible]	.3												63	63	40	17
[illegible] / 51	.4	1.[illegible]	2.7	1.1	1.3	.1												47	47	52	34
[illegible] / 49	.6	1.6	1.9	1.9	1.[illegible]	.3												50	50	58	32
[illegible] / 47	.3	.7	2.2	2.6	.4	1.[illegible]												50	50	58	36
[illegible] / 45	.1	.7	2.7	2.2	1.7	.1												53	54	49	6[illegible]
[illegible] / 43	.3	.7	2.2	1.9	1.3	.1												45	48	51	3[illegible]
[illegible] / 41		1.[illegible]	3.7	4.3	2.4	.4												83	83	35	4[illegible]
[illegible] / 39		1.[illegible]	2.7	2.4	.4	.1												47	47	48	38
[illegible] / 37		.9	2.3	1.[illegible]	.4	.1												33	34	57	49
[illegible] / 35		.9	1.9	1.4	.9													35	35	66	3[illegible]
[illegible] / 33		.4	1.6	1.4	.4													27	27	53	38
[illegible] / 31		.3	.1	.7														8	8	23	34
[illegible] / 29		.1	.1															2	2	28	38
[illegible] / 27			.1															1	2	23	41
[illegible] / 25																				2	35
[illegible] / 23																				1	44
[illegible] / 21																					19
[illegible] / 19																					17
[illegible] / 17																					8
[illegible] / 15																					5
[illegible] / 13																					6
[illegible] / 11																					3
[illegible] / 9																					7
[illegible] / 7																					1
TOTAL	2.6	13.6	33.5	30.9	15.4	3.7	.1	.1											702		696
																		696		696	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3353156	47232	67.9	14.588	696							
Dry Bulb	1611242	33138	47.2	8.185	702		1.5	.1				90
Wet Bulb	1317220	29718	42.7	8.338	696		10.0					90
Dew Point	1020687	25527	36.7	11.023	696		33.4					90

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-79 (YEARS) NOV (MONTH)

 2100-2300 (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
84/ 63		.3	.1															3	3		
82/ 61		.1	.1															2	2	2	
80/ 59		.4	.3															5	5	2	3
78/ 57		1.2	1.5	.4	.1													22	22	6	1
76/ 55	.3	1.0	2.3	.6														29	29	10	13
74/ 53	.6	2.0	2.2		.6													37	37	26	9
72/ 51	.3	2.2	1.3	.4	.1													30	30	42	24
70/ 49	.9	3.9	1.7	.9	.1	.1												53	54	38	33
68/ 47	1.0	3.1	1.2	1.9														49	49	54	35
66/ 45	.4	4.9	1.7	1.5	.6	.1												64	64	44	59
64/ 43	.4	2.9	1.7	1.0	.3													44	44	55	37
62/ 41	.3	4.5	3.9	1.5	.4	.1												74	75	38	41
60/ 39		3.3	2.6	1.2	.1													50	50	52	30
58/ 37	.3	2.0	2.5	1.5	.1													44	44	58	55
56/ 35	.1	2.9	2.6	1.2														47	47	41	37
54/ 33	.3	1.9	3.5	1.3														46	46	59	35
52/ 31	.1	2.5	3.1	.4	.1													43	43	51	43
50/ 29	.1	1.3	.7	1.2														23	23	47	36
48/ 27	.4	1.0	.7	.1														16	16	34	42
46/ 25		.1	.6															5	5	17	32
44/ 23			.1															1	1	6	56
42/ 21																				5	22
40/ 19																					13
38/ 17																					5
36/ 15																					12
34/ 13																					5
32/ 11																					7
30/ 9																					5
TOTAL	5.7	41.8	34.6	14.7	2.8	.4												687	689	687	687

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≥ 93 F	Total
Rel. Hum.	4206171	52911	77.0	13.824	687							
Dry Bulb	1301444	29404	42.7	8.229	689		11.5					9
Wet Bulb	1138848	27356	39.8	8.498	687		21.0					9
Dew Point	951705	24489	35.6	10.715	687		36.2					9

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
66-69,73-79 — YEARS
NOV — MONTH
PAGE 1
ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
7 / 77							.1			.0								5	5		
6/ 75						.0	.1		.0	.0								6	6		
4/ 73						.0	.1	.0										7	7		
2/ 71					.0	.0	.1	.1										10	10		
/ 69						.1	.2	.0		.0								20	20		
/ 67			.0		.1	.3	.2	.1	.0	.0								39	39		
6/ 65		.0	.1	.1	.2	.3	.2	.1										49	50	7	
4/ 63		.2	.2	.4	.3	1.1	.2	.1										124	124	10	1
/ 61		.1	.2	.3	.3	.3	.2	.1										108	108	21	8
/ 59	.1	.4	.6	.8	.9	.8	.3	.1										210	212	46	19
/ 57	.1	.8	1.1	.8	.7	.5	.1	.1										219	219	123	27
5/ 55	.2	1.1	1.1	.8	.8	.5	.1	.1	.1									239	240	145	61
4/ 53	.6	1.4	1.0	.8	.8	.5	.3	.1										294	294	317	126
2/ 51	.7	1.4	1.0	.8	.8	.3	.4	.1										292	292	281	194
0/ 49	.6	1.7	.9	.9	.9	.7	.3	.0										320	324	320	232
8/ 47	.5	1.9	1.0	1.2	.8	.5	.1											316	316	329	227
6/ 45	.6	2.6	1.2	1.3	1.0	.6	.2											408	412	348	364
4/ 43	.5	2.3	1.1	1.2	.8	.4												319	322	340	248
2/ 41	1.4	2.5	2.4	1.7	1.3	.6	.4											518	519	390	395
/ 39	.6	2.0	1.5	.9	.7	.1												308	311	362	242
/ 37	.9	2.1	1.2	1.4	.3	.0												308	312	406	318
6/ 35	.6	2.0	1.5	1.0	.2													283	285	398	320
4/ 33	.7	1.6	1.5	.8	.1													246	247	373	312
2/ 31	.5	1.8	1.4	.5	.1													223	224	344	325
/ 29	.2	1.6	.8	.4														159	160	267	267
6/ 27	.6	1.3	.7	.1														148	150	222	309
4/ 25	.3	.6	.2															63	63	136	225
2/ 23	.1	.5	.1															38	39	75	361
2/ 21		.2	.0															13	13	30	179
/ 19		.1																4	4	18	153
8/ 17		.1																3	3	5	109
6/ 15																				3	93
4/ 13																					79
2/ 11																					30

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

FORM AWS 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) | TAEGU AB KO (STATION NAME) | 68-69,73-79 (YEARS) | NOV (MONTH)

ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 9																					32
/ 7																					9
/ 5																					1
TAL	9.8	29.8	20.9	16.3	11.2	7.6	3.2	.9	.1	.1									5330		5299
																		5299		5299	

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	28916332	378480	71.4	18.855	5299							
Dry Bulb	11343166	239690	45.0	10.290	5330		88.6	11.8	2.4			72
Wet Bulb	9302298	216610	40.9	9.194	5299		148.5					7
Dew Point	7269552	187298	35.3	11.071	5299		294.2					72

USAFETAC FORM AS 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

47212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-8[illegible] — YEARS
DEC — MONTH

0000-0200 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 57			.4															3	3		
[illegible]4/ 53			.1															1	1	3	
[illegible]2/ 51		.4	.1	.1														5	5	1	1
[illegible] / 49		.7	.1															6	6	6	3
[illegible] / 47	.3	1.1		.3														12	12	9	8
[illegible] / 45	.4	2.0	.7		.1													24	24	17	12
[illegible]4/ 43	.1	1.5	.5	.3														18	18	15	16
-2/ 41	.8	1.4	.9	.3		.1												26	26	21	21
[illegible] / 39	.5	1.6	.7		.4													24	24	17	12
[illegible] / 37	1.5	.9	1.8	.3														33	33	31	14
[illegible] / 35	.8	2.[illegible]	2.4	.7	.1													45	46	23	39
3 / 33	1.1	4.5	2.6	.5														64	64	52	14
[illegible]2/ 31	.7	3.9	2.6	.8														59	59	64	25
[illegible] / 29	.4	5.5	1.8	.8	.3													65	66	71	42
[illegible] / 27	1.9	10.0	2.8	.4														112	112	78	70
/ 25	.8	6.[illegible]	1.6															62	62	92	45
[illegible] / 23	.9	10.1	4.1															112	112	75	77
2/ 21	.3	3.1	.5															29	29	74	54
/ 19	.1	1.8	.1															15	15	49	62
[illegible] / 17		1.5	.1															12	13	19	44
1 / 15		.4	.3															5	5	11	45
[illegible] / 13		.4																3	3	3	4[illegible]
1 / 11		.1																1	1	5	39
/ 9		.3																2	2	2	24
[illegible] / 7		.1																1	1	1	12
/ 5																					16
/ 3																					[illegible]
/ 1																					4
/ -1																					1
-[illegible] / -5																					2
TOTAL	10.7	59.4	24.4	4.5	.9	.1												739	742	739	739

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature					
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4446561	56363	76.3	14.151	739							
Dry Bulb	740530	22706	30.6	7.853	742		60.2					93
Wet Bulb	649226	21124	28.6	7.844	739		68.5					93
Dew Point	489837	17491	23.7	10.138	739	.4	76.0					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-8[illegible] — YEARS
DEC — MONTH

0300-0500 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 59						.1												1	1		
[illegible] / 57			.3	.1														3	3		
4/ 53			.4															3	3	3	
[illegible]/ 51																				1	
5 / 49	.4	.3																5	5	6	6
[illegible] / 47	.5	.9																11	11	13	7
4[illegible]/ 45	.3	1.0	.4															13	13	8	12
4/ 43	.4	.7	.5	.1														13	13	11	8
[illegible]2/ 41	1.2	1.8	.7															28	28	19	17
4 / 39	.9	1.2	.8	.7														27	27	21	17
3[illegible] / 37	.8	1.6	1.2	.3														29	29	25	11
[illegible]/ 35	.5	3.0	2.9	1.2		.1												59	59	25	21
3[illegible]/ 33	1.0	3.5	1.7	.5														52	53	54	29
[illegible]2/ 31	.7	2.6	1.4	.3														38	38	52	34
[illegible] / 29	.8	3.9	2.2	.3														55	55	54	35
[illegible] / 27	5.2	8.5	1.8	.8														125	125	96	68
[illegible]/ 25	1.7	4.4	1.7	.1														61	62	76	46
[illegible]/ 23	1.4	10.7	2.1															109	110	61	66
[illegible]2/ 21	.9	5.1	.8															52	52	104	47
[illegible] / 19		3.0	.1															24	24	5[illegible]	58
[illegible]/ 17	.4	3.9	.1															34	34	37	47
1 / 15	.1	1.3																11	11	29	49
14/ 13		.5																4	4	9	56
1 / 11		.5																4	4	4	34
[illegible]/ 9		.3																2	2	1	37
[illegible]/ 7		.4																3	3	5	16
[illegible]/ 5																					18
[illegible]/ 3																					1
/ -1																					[illegible]
-[illegible]/ -3																					2
-4/ -5																					1
TOTAL	17.2	59.1	19.1	4.3		.3													769		766
																		766		766	

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	4856946	60086	78.4	13.707	766							
Dry Bulb	705076	22430	29.2	8.136	769		63.4					93
Wet Bulb	626386	21020	27.4	8.050	766		70.2					93
Dew Point	482151	17619	23.0	10.026	766	.7	77.5					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-80 — YEARS
DEC — MONTH

0600-0800 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31				
[illegible] / 57				.3														2	2		
5[illegible] / 55				.3														2	2		
4 / 53			.3															2	2	1	
[illegible] / 51																				1	
5[illegible] / 49	.3	.4																5	5	7	3
[illegible] / 47	.1	.3																3	3	5	5
4[illegible] / 45	1.[illegible]	.1																8	8	8	13
[illegible]4 / 43	.4	.3																5	5	3	4
[illegible]2 / 41	1.5	1.7	.6															27	27	18	17
4 / 39	1.5	.8	.3	.6														23	23	[illegible]	16
3[illegible] / 37	1.3	1.3	.3	.4														23	24	18	13
[illegible] / 35	.3	3.4	.8	.6	.3													38	38	18	9
3[illegible] / 33	1.1	1.8	1.0	.3														30	30	43	29
[illegible]2 / 31	1.1	4.2	2.5	1.1	.1													65	65	45	20
[illegible] / 29	1.3	4.2	1.5	.6														54	54	50	42
[illegible] / 27	6.8	4.9	1.1															91	92	95	56
[illegible] / 25	2.8	4.6	1.1															61	63	71	44
2[illegible] / 23	2.[illegible]	8.6	3.0	.4														99	99	51	61
2 / 21	2.1	7.3	.6															71	71	87	51
[illegible] / 19	1.0	3.2	1.0															37	37	72	43
[illegible] / 17	.7	2.1																20	20	34	71
1 / 15	.6	2.7																23	23	32	43
[illegible] / 13	.1	1.8																14	14	21	49
1[illegible] / 11		.1																1	1	4	42
/ 9	.1	.3																3	3	3	35
[illegible] / 7		.6																4	4	1	16
[illegible] / 5																				3	18
[illegible] / 3																					9
/ 1																					1
/ -1																					1
-4 / -5																					2
-[illegible] / -7																					1
TOTAL	26.2	54.9	14.1	4.5	.4													711	715	711	711

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4701986	56914	80.0	14.347	711							
Dry Bulb	599368	19894	27.8	8.013	715		71.0					93
Wet Bulb	537473	18707	26.3	7.986	711		74.4					93
Dew Point	420259	15735	22.1	10.072	711	.5	78.7					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMAR

43312 — STATION
TAEGU AB KO — STATION NAME
68-69,73-80 — YEARS
DEC — MONTH

0900-1100 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Po
/ 59				.3														2	2		
/ 57			.1	.6	.1													6	6		
5 / 55			.1	.1														2	2		
4/ 53			.1	.1														2	2	4	
/ 51	.1	.7	.4															9	9	9	
/ 49	.1	.1	1.0	.1	.1													11	11	8	
/ 47	.3	.4	.4	.7	.1													14	14	9	
/ 45	.4	1.4	1.3	.4	.3													27	27	15	1
4/ 43	.1	1.0	.8	1.3	.1	.1												25	25	15	1
2/ 41	.8	2.5	1.7	1.7	.6													52	52	25	1
/ 39	.1	1.3	1.5	1.8	1.1													42	43	29	1
/ 37	.3	2.0	2.0	2.5	.1													49	49	37	1
/ 35	.7	2.1	4.3	2.1	.8													70	71	44	2
3 / 33	.6	3.6	3.9	1.5	.3													71	71	64	2
/ 31	.3	4.9	4.1	2.2	.4													95	86	85	3
/ 29	1.1	3.2	2.7	2.1														65	65	91	3
/ 27	.8	4.6	3.6	1.0														72	73	73	7
/ 25	.6	3.1	1.3	.3														37	37	79	5
4/ 23	.7	2.4	1.5	.1														34	35	55	8
2/ 21	.1	1.5	.6															16	16	25	4
/ 19	.1	1.1	.6															13	13	28	5
/ 17	.3	.4																5	5	11	4
/ 15	.1	.4																4	4	13	3
/ 13		.1	.1															2	2		4
/ 11			.1															1	1	2	2
/ 9																					1
/ 7																				1	1
/ 5																					
/ 3																					
/ 1																					
/ -1																					
/ -3																					
/ -7																					

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMA

47212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-8 — YEARS
DEC — MONTH

0900-11 — HOURS (L. S.


Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew
TOTAL	7.8	36.9	32.3	19.3	3.9	.1												716	721	716	7


Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	3777122	50740	70.9	15.923	716							
Dry Bulb	874863	24459	33.9	7.916	721		43.5					
Wet Bulb	727271	22151	30.9	7.663	716		59.4					
Dew Point	516704	17828	24.9	10.090	716	.5	73.9					

USAFETAC FORM AA 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AD-A113 228 AIR FORCE ENVIRONMENTAL TECHNICAL APPLICATIONS CENTER--ETC F/G 4/2
TAEGU AB, KOREA: REVISED UNIFORM SUMMARY OF SURFACE WEATHER OBS--ETC(U)
OCT 81

UNCLASSIFIED USAFETAC/DS-81/100 SBI-AD-E850 142 NL

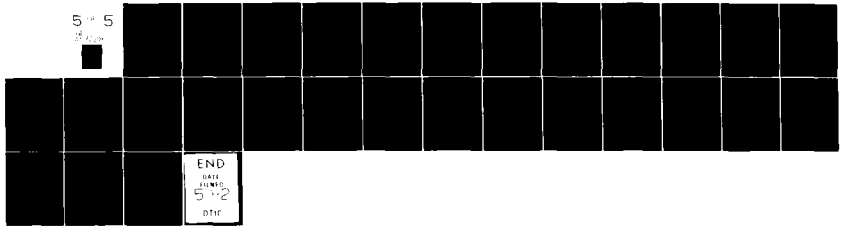

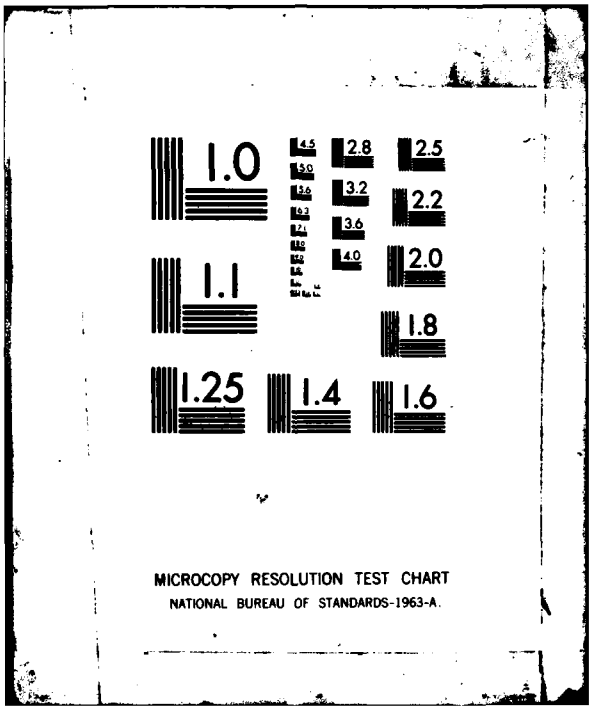
1.0
1.1
1.25
1.4
1.6
2.8
3.2
3.6
4.0
2.5
2.2
2.0
1.8
MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A.

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-80 — YEARS
DEC — MONTH

1200-1400 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
4/ 63					.1	.5												5	5		
3/ 61				.1	.5	.1												6	6		
/ 59			.1	1.2	.5	.4												17	17		
5/ 57			.4	.7	.9													15	15		
5 / 55				.5	.7	.1												10	10	6	
4/ 53			.3	.5	.5	.7												15	15	17	
2/ 51		.3	1.0	.5	1.3	.5	.3											30	30	13	3
5 / 49	.3	.5	.7	1.6	1.4	.9	.1											42	43	18	9
/ 47		.7	.1	1.6	2.2	1.2												44	44	30	12
4 / 45	.3	.7	1.7	3.3	3.5	1.2	.5	.1										86	86	26	27
4/ 43	.3	.5	.8	2.5	2.1	1.4	.3											60	60	35	23
2/ 41	.3	1.0	3.4	4.3	5.0	2.6	.3											129	129	51	24
/ 39	.4	.7	.8	3.4	3.4	.3												68	68	74	22
3 / 37		.4	1.4	3.3	1.1	.1												48	48	79	27
/ 35	.1	.4	3.5	2.5	1.4													61	61	63	31
3+/ 33	.1	.3	1.6	3.3	.4													41	42	94	37
E/ 31		.3	2.0	2.2	.1													35	36	98	43
/ 29			1.2	1.0	.1													18	18	49	43
/ 27		.7	1.0	.5														17	17	52	63
/ 25		.3	.1	.7														8	8	26	50
+/ 23		.3	.3	.1														5	5	18	9
2/ 21		.1	.1															2	2	6	46
/ 19		.1	.1															2	2	6	5
/ 17																				2	36
1 / 15			.1															1	1	1	41
+/ 13																					31
1 / 11																				1	21
/ 9																					15
+/ 7																					6
2/ 5																					5
4/ 3																					3
/ 1																					3
-+/ -5																					1

Element (X)	$\Sigma X'$	ΣX	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43612 — STATION
TAEGU AB KO — STATION NAME
68-69,73-80 — YEARS
DEC — MONTH
PAGE 2
1200-1400 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	1.7	7.1	20.8	33.5	25.4	10.1	1.4	.1										765	768	765	765

Element (X)	$\Sigma x'$	Σx	$\bar{x}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	2626133	43307	56.6	15.113	765							
Dry Bulb	1396325	32167	41.9	7.996	768		10.8					93
Wet Bulb	1044630	27678	36.2	7.522	765		31.5					93
Dew Point	632547	20493	26.8	10.459	765	.1	66.9					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 68-69,73-80 YEARS | DEC MONTH

 1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
[illegible] / 65						.1												1	1		
[illegible] / 63					.4	.7	.3											10	10		
[illegible] / 61				.5		.1	.1											6	6		
[illegible] / 59			.4	1.2	.9	.4	.3											24	24		
[illegible] / 57		.1	.1	1.1	.7	.9												22	22	1	
5[illegible] / 55				.5	.9	.3												13	13	13	
[illegible] / 53		.1	.4	.1	.7	1.1	.4											21	22	15	1
[illegible] / 51		.3	1.1	.7	2.3	1.8	.1											46	47	19	5
5[illegible] / 49	.1	.1	1.5	2.0	1.6	1.6	.4											55	56	19	2[illegible]
[illegible] / 47		.4	.7	.9	1.9	2.6												48	49	30	6
4[illegible] / 45		.5	.8	1.6	3.7	1.9	.9	.1										71	72	37	[illegible]7
[illegible]4 / 43		.5	.9	3.2	2.3	1.5	.3											65	65	53	19
[illegible]2 / 41	.3	1.4	1.9	3.5	5.5	2.4												111	111	53	21
4 / 39		.7	1.6	3.1	3.7													67	67	53	32
3[illegible] / 37		.3	.7	3.0	2.0													44	44	77	29
[illegible] / 35		.8	1.6	1.1	.9													33	33	[illegible]9	33
3[illegible] / 33	.1	.8	.7	2.7	.1													33	33	95	32
[illegible]2 / 31		.3	.8	1.5	.4													22	22	73	48
[illegible] / 29		.3	.5	2.2														22	22	36	42
[illegible] / 27		.7	.8	.4														14	15	33	68
[illegible] / 25		.3	.3															4	4	29	43
2[illegible] / 23		.1	.1															2	2	14	63
2[illegible] / 21			.1	.3														3	3	4	44
[illegible] / 19		.1	.1															2	2	1	37
[illegible]7 / 17																				2	34
[illegible]5 / 15																				3	59
[illegible]3 / 13																					31
1 / 11																					15
/ 9																					15
[illegible] / 7																					7
[illegible] / 5																					4
[illegible] / 3																					1
-[illegible] / -3																					2
-[illegible] / -7																					1

Element (X)	$\Sigma_n X'$	$\Sigma_n X$	$\bar{X}$	σ_n	No. Obs.	Mean No. of Hours with Temperature						
Rel. Hum.						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-3 (OL A) 84 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 68-69,73-80 YEARS | DEC MONTH

1500-1700 HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
TOTAL	.5	7.8	15.3	29.8	28.1	15.4	2.8	.1										739	745	739	739

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≤ 80 F	≤ 93 F	Total
Rel. Hum.	2403826	40686	55.1	14.900	739							
Dry Bulb	1467721	32479	43.6	8.341	745		8.7					93
Wet Bulb	1075994	27618	37.4	7.708	739		24.5					93
Dew Point	647521	20435	27.7	10.570	739	.4	64.7					93

FORM AS 66 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-80 — YEARS
DEC — MONTH

1800-2000 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point
/ 59					.1		.1											2	2		
/ 57			.7	.3														7	7		
/ 55		.1	.3		.1													4	4		
/ 53		.1	.7	.5	.3													12	12	6	
/ 51		1.1	.9	.4														18	18	9	2
/ 49	.1	.8	.9	.8														20	20	14	13
/ 47		.7	1.3	.9	.1													23	23	27	1[illegible]
/ 45		1.3	3.1	1.3	.8													49	49	15	17
/ 43	.1	.8	.8	2.0	.4													31	31	30	19
/ 41	.3	2.6	3.6	2.7	.9	.3												77	78	37	2[illegible]
/ 39		.9	3.2	2.6	.9													57	59	34	32
/ 37		2.[illegible]	3.5	1.9	1.1													63	63	49	32
/ 35	.1	2.4	4.0	2.3	1.1													74	75	66	23
/ 33	.4	1.7	4.0	3.5	.4													75	76	81	32
/ 31	.5	3.1	3.9	2.0	.3													73	73	71	40
/ 29		2.4	3.0	2.4														58	59	88	41
/ 27		2.3	3.2	.8														47	48	70	82
/ 25		1.1	1.9	.3														24	25	69	67
/ 23		1.6	1.1															20	20	34	59
/ 21		.3	.3															4	4	27	38
/ 19		.3																2	2	9	42
/ 17			.1															1	1	4	43
/ 15			.1															1	1		43
/ 13		.1																1	1	1	34
/ 11		.1																1	1	3	24
/ 9																					16
/ 7																					5
/ 5																					11
/ 3																					2
/ 1																					2
TOTAL	1.6	25.9	40.7	24.7	6.6	.3	.1											744	752	744	744

Element (X)	$\Sigma x'$	Σx	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	3476766	49722	66.8	14.388	744							
Dry Bulb	1071029	27769	36.9	7.793	752		29.1					93
Wet Bulb	865663	24723	33.2	7.706	744		47.0					93
Dew Point	598640	19670	26.4	1.285	744		68.5					93

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43512 — STATION
TAEGU AB KO — STATION NAME
68-69,73-80 — YEARS
DEC — MONTH

2100-2300 — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F) 0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	TOTAL D.B./W.B.	TOTAL Dry Bulb	TOTAL Wet Bulb	TOTAL Dew Point
[illegible]/ 57		.1	.3															3	3		
5[illegible]/ 55		.3		.1														3	3	1	
[illegible]4/ 53																				4	1
[illegible]2/ 51		.5	.5	.1														9	9		2
5[illegible]/ 49	.5	.8	.4	.4														16	16	10	9
[illegible] / 47	.3	1.2																11	11	17	8
4[illegible]/ 45	.3	2.4	1.5	.3														35	35	17	17
[illegible]4/ 43	.6	1.4	1.5	.8		.1												35	35	25	19
4[illegible]/ 41	.1	2.6	1.4	.5	.1	.1												38	38	29	20
4 / 39		2.4	1.4	.6														35	35	25	13
3 / 37	.4	1.7	1.7	.5														33	33	37	27
[illegible]/ 35	.4	3.2	3.3	.6	.3													61	61	34	34
3[illegible]/ 33	.3	4.2	2.6	1.8	.3													71	72	69	19
[illegible]2/ 31	1.3	5.4	3.2	1.8	.4													92	92	72	43
[illegible] / 29	.8	5.4	3.2	1.7	.1													87	88	71	41
[illegible]/ 27	1.4	6.8	3.2	.9														96	97	104	86
[illegible]/ 25	.3	4.7	2.7	.1														61	61	90	63
2[illegible]/ 23	.3	3.3	2.4	.3														49	50	69	62
[illegible]2/ 21	.3	1.5	.8															20	20	50	40
/ 19		1.0	.4															11	11	26	54
[illegible]/ 17		.6	.3															7	7	13	49
1[illegible]/ 15			.1															1	1	8	49
[illegible]/ 13		.1																1	1	2	38
1[illegible]/ 11		.5	.1															5	5	5	32
[illegible]/ 9																				2	19
[illegible]/ 7																					12
[illegible]/ 5																					11
[illegible]/ 3																					4
[illegible]/ 1																					2
/ -1																					3
[illegible]/ -3																					2
[illegible]/ -5																					1
TOTAL	6.8	50.3	31.0	10.5	1.2	.3												780	784	780	780

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	mean No. of Hours with Temperature ≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	4399803	57465	73.7	14.606	780							
Dry Bulb	897629	25799	32.9	7.884	784		51.4					93
Wet Bulb	770759	23725	30.4	7.941	780		61.0					93
Dew Point	573391	19509	25.0	10.473	780	.7	72.8					93

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 (STATION) TAEGU AB KO (STATION NAME) 68-69,73-80 (YEARS) DEC (MONTH)

PAGE 1 ALL (HOURS (L. S. T.))

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
6/ 65						.0												1	1		
4/ 63					.1	.2	.0											15	15		
2/ 61				.1	.1	.0	.0											12	12		
/ 59			.1	.3	.2	.1	.1											46	46		
/ 57		.3	.3	.4	.2	.1												61	61	1	
5/ 55		.1	.1	.2	.2	.1												34	34	20	
4/ 53		.0	.3	.2	.2	.2	.1											56	57	53	2
2/ 51	.3	.4	.5	.2	.5	.3	.1											117	118	53	14
/ 49	.2	.5	.6	.6	.4	.3	.1											160	162	98	72
/ 47	.2	.7	.3	.6	.6	.5												166	167	137	64
/ 45	.3	1.2	1.2	.9	1.1	.4	.2	.0										313	314	143	139
4/ 43	.3	.8	.8	1.3	.6	.4	.1											252	252	187	116
2/ 41	.7	1.9	1.8	1.6	1.5	.7	.0											488	489	253	158
/ 39	.4	1.2	1.3	1.6	1.2	.0												343	346	273	161
3/ 37	.5	1.3	1.6	1.5	.5	.0												322	323	353	171
/ 35	.4	2.2	2.9	1.4	.6	.0												441	444	352	212
3/ 33	.6	2.6	2.2	1.7	.2													437	441	557	215
/ 31	.5	3.1	2.6	1.5	.2													469	471	560	288
/ 29	.5	3.1	2.0	1.4	.1													424	427	510	325
/ 27	2.0	4.8	2.2	.6														574	579	598	565
/ 25	.8	3.1	1.3	.2														318	322	532	413
4/ 23	.7	4.6	1.8	.1														430	433	377	601
2/ 21	.5	2.3	.5	.2														197	197	377	367
/ 19	.2	1.3	.3															106	106	241	399
/ 17	.2	1.1	.1															79	80	122	363
/ 15	.1	.6	.1															46	46	94	341
/ 13	.0	.4	.0															25	25	36	320
/ 11		.2	.0															13	13	24	230
/ 9	.0	.1																7	7	8	177
/ 7		.1																8	8	8	85
/ 5																				3	95
/ 3																					27
/ 1																					13
/ -1																					0

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-69,73-80 — YEARS
DEC — MONTH
PAGE 2
ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
- / -3																					8
-4/ -5																					7
-6/ -7																					3
TOTAL	9.0	37.6	24.7	16.4	8.4	3.3	.6	.0											5996		5960
																		5960		5960	

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	30689043	415283	69.7	17.151	5960							
Dry Bulb	7752541	207703	34.6	9.645	5996		336.8					744
Wet Bulb	6297402	186746	31.3	8.652	5960		435.7					744
Dew Point	4361050	148780	25.0	10.420	5960	3.4	578.7					744

USAFETAC FORM 0-26-5 (OL A) Apr 64 REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 — STATION
TAEGU AB KO — STATION NAME
68-70,73-81 — YEARS
ALL — MONTH

ALL — HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
1 2/101								.0				.0		.0				6	6		
1 0/ 99										.0	.0	.0	.0					39	39		
8/ 97								.0	.0	.0	.0	.0						39	39		
6/ 95							.0	.0	.1	.1	.0	.0						162	163		
4/ 93					.0	.0	.0	.2	.1	.1	.0	.0	.0	.0				244	246		
2/ 91				.0	.0	.1	.1	.2	.1	.0	.0	.0	.0					420	421		
/ 89		.0		.0	.0	.1	.2	.3	.1	.1	.0	.0	.0		.0			558	560		
8/ 87				.0	.1	.3	.3	.1	.1	.0	.1	.0	.0	.0	.0			683	684	2	
6/ 85		.0	.0	.1	.3	.5	.2	.2	.1	.1	.1	.0	.0	.0				1017	1019	3	1
4/ 83			.1	.4	.3	.3	.2	.2	.1	.1	.0	.0	.0					1143	1143	22	5
/ 81	.0	.0	.4	.8	.4	.3	.4	.3	.2	.1	.1	.0	.0					1914	1920	229	14
/ 79	.0	.2	.6	.5	.3	.4	.2	.2	.1	.1	.1	.0	.0	.0				1763	1767	745	72
/ 77	.0	.7	1.1	.8	.5	.4	.4	.3	.2	.1	.1	.0	.0					3022	3027	1743	684
6/ 75	.1	.7	.7	.5	.4	.3	.3	.2	.1	.1	.1	.0						2247	2255	2350	1546
/ 73	.1	.7	.7	.6	.3	.3	.3	.2	.1	.1	.0	.0						2225	2238	2398	2282
/ 71	.1	.5	.8	.4	.5	.2	.3	.1	.1	.1	.0	.0	.0					2087	2095	2289	2195
/ 69	.1	.7	.8	.4	.4	.4	.2	.1	.1	.1	.0	.0						2169	2174	2362	1792
/ 67	.1	.6	1.2	.6	.4	.4	.2	.2	.1	.1	.0							2473	2476	2486	2127
6/ 65	.2	.8	.7	.4	.3	.2	.2	.2	.1	.0	.0							2133	2146	2485	1960
4/ 63	.2	1.1	.7	.6	.4	.5	.2	.2	.1	.0								2578	2590	2732	2522
/ 61	.1	.7	.5	.4	.4	.2	.2	.1	.1	.0								1775	1785	2556	2029
/ 59	.1	1.1	.8	.7	.5	.4	.3	.2	.0	.0								2676	2685	2318	2888
8/ 57	.1	.7	.5	.4	.3	.2	.1	.1	.0	.0								1681	1687	2262	1997
6/ 55	.1	.6	.5	.4	.3	.3	.1	.1	.0									1582	1592	2069	1856
4/ 53	.1	.7	.5	.4	.3	.2	.2	.0										1651	1663	2269	1845
2/ 51	.1	.6	.6	.4	.4	.2	.1	.0										1600	1607	1922	1909
0/ 49	.1	.6	.7	.5	.3	.4	.1	.0	.0									1821	1833	1930	2011
8/ 47	.1	.7	.5	.4	.4	.3	.1	.0	.0									1643	1655	1995	1572
6/ 45	.2	1.1	.8	.6	.6	.3	.1	.0										2387	2406	2115	2386
4/ 43	.2	.8	.5	.6	.3	.2	.1	.0										1740	1752	1989	1707
2/ 41	.3	1.0	1.0	.8	.6	.3	.1	.0										2692	2699	1991	2471
0/ 39	.2	.8	.7	.6	.4	.1	.0											1826	1836	1905	1685
8/ 37	.2	.6	.7	.7	.3	.1												1703	1713	2191	1673
6/ 35	.1	.8	1.0	.6	.3	.0												1829	1841	1911	1604

Element (X)	Σ_X'	Σ_X	$\bar{X}$	σ_x	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≤ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

PSYCHROMETRIC SUMMARY

43212 STATION | TAEGU AB KO STATION NAME | 68-70,73-81 YEARS | ALL MONTH

ALL HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																		TOTAL	TOTAL		
	0	1-2	3-4	5-6	7-8	9-10	11-12	13-14	15-16	17-18	19-20	21-22	23-24	25-26	27-28	29-30	≥31	D.B./W.B.	Dry Bulb	Wet Bulb	Dew Point
34/ 33	.2	.9	.9	.6	.2	.0												1821	1938	2377	1650
32/ 31	.2	1.0	.9	.6	.2	.0												1843	1852	2372	1803
30/ 29	.1	1.0	.7	.5	.1													1677	1690	2024	1759
28/ 27	.4	1.4	.9	.4	.0													2014	2038	2157	2610
26/ 25	.2	.8	.6	.2	.0													1175	1186	1924	1738
24/ 23	.1	1.2	.8	.1	.0													1516	1527	1523	2420
22/ 21	.1	.7	.3	.0														732	739	1401	1500
20/ 19	.1	.5	.3	.0														546	549	1024	1442
18/ 17	.0	.4	.2	.0														433	437	660	1363
16/ 15	.0	.3	.1	.0														278	281	515	1313
14/ 13	.0	.2	.1															195	195	336	1221
12/ 11	.0	.1	.0															115	116	214	930
10/ 9	.0	.1	.0															58	58	92	1058
8/ 7	.0	.0	.0															35	35	60	588
6/ 5	.0	.0																17	17	29	725
4/ 3		.0																1	1	9	322
2/ 1																				1	228
0/ -1																					212
-2/ -3																					121
-4/ -5																					74
-6/ -7																					42
-8/ -9																					30
-10/-11																					19
-12/-13																					25
-14/-15																					14
-16/-17																					11
-18/-19																					12
-20/-21																					15
-22/-23																					3
-24/-25																					1
-26/-27																					3
-28/-31																					2
TOTAL	4.5	25.6	22.7	15.9	10.5	7.9	5.2	3.5	1.9	1.2	.6	.3	.1	.0	.0			65984	66321	65984	65984

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≤ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.	334511017	4530739	68.7	18.836	65984							
Dry Bulb	226097104	3648126	55.0	19.580	66321		1351.9	2975.2	2070.3	934.8	65.4	8760
Wet Bulb	183901717	3278307	49.7	17.850	65984		1830.6	1956.3	999.4	66.6		8760
Dew Point	154326987	2897093	43.9	20.276	65984	73.7	2787.7	1431.3	613.8	5.2		8760

FORM 26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USAFETAC

PSYCHROMETRIC SUMMARY

STATION _____ STATION NAME _____ YEARS _____ MONTH _____

HOURS (L. S. T.)

Temp. (F)	WET BULB TEMPERATURE DEPRESSION (F)																	TOTAL D.B./W.B.	TOTAL		
	0	1 - 2	3 - 4	5 - 6	7 - 8	9 - 10	11 - 12	13 - 14	15 - 16	17 - 18	19 - 20	21 - 22	23 - 24	25 - 26	27 - 28	29 - 30	≥ 31		Dry Bulb	Wet Bulb	Dew Point

Element (X)	$\Sigma_{X'}$	Σ_X	$\bar{X}$	σ_X	No. Obs.	Mean No. of Hours with Temperature						
						≤ 0 F	≤ 32 F	≥ 67 F	≥ 73 F	≥ 80 F	≥ 93 F	Total
Rel. Hum.												
Dry Bulb												
Wet Bulb												
Dew Point												

USAFETAC FORM AM 64 0-26-5 (OL A) REVISED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DRY-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

12 (STATION) | TAEGU AB KO (STATION NAME) | 68-7[illegible],73-81 (YEARS)

HRS. (L.S.T.)		JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ANNUAL
0-02	MEAN	[illegible].1	29.2	37.5	49.7	58.1	66.5	73.9	74.8	65.8	52.5	40.3	30.6	[illegible].1
	S.D.	7.345	7.564	6.815	6.521	5.344	4.825	5.285	4.346	5.894	6.929	8.279	7.853	18.262
	TOTAL OBS	733	671	657	633	676	644	669	683	653	631	65[illegible]	742	[illegible]44
3-5	MEAN	24.1	27.9	35.2	46.8	55.4	64.3	72.[illegible]	73.2	64.0	50.2	38.6	29.2	46.3
	S.D.	7.831	7.9[illegible]7	7.126	6.818	5.773	5.124	5.[illegible]95	4.445	6.5[illegible]7	7.133	8.317	8.136	18.343
	TOTAL OBS	737	680	665	662	70[illegible]	662	714	7[illegible]2	676	654	657	769	[illegible]78
6-	MEAN	22.[illegible]	26.1	34.1	46.8	56.4	65.3	73.1	73.8	63.8	49.2	37.4	[illegible]7.8	47.8
	S.D.	7.892	8.297	7.1[illegible]7	7.[illegible]11	6.100	5.124	5.445	4.750	6.885	7.397	8.695	8.013	19.214
	TOTAL OBS	737	688	663	661	711	649	688	685	647	627	633	715	[illegible]104
- 11	MEAN	2[illegible].[illegible]	33.0	42.2	56.4	66.7	73.3	79.[illegible]	80.9	72.[illegible]	59.5	45.4	[illegible]3.9	[illegible]5.9
	S.D.	7.217	7.647	7.435	6.635	6.257	5.331	6.813	4.955	5.942	6.507	8.319	7.916	19.463
	TOTAL OBS	716	667	64[illegible]	67[illegible]	703	646	717	693	672	62[illegible]	642	721	[illegible]124
12-14	MEAN	36.3	39.8	49.6	63.1	73.[illegible]	78.7	83.0	[illegible]5.4	77.4	67.6	52.9	41.9	62.3
	S.D.	7.649	8.242	8.385	7.537	7.337	6.479	7.913	5.536	5.794	[illegible].41[illegible]	8.672	7.996	16.621
	TOTAL OBS	734	670	650	671	717	687	698	7[illegible]6	661	7[illegible]2	669	768	[illegible]339
[illegible]	MEAN	38.5	42.4	51.7	65.1	74.7	80.2	84.3	[illegible]6.4	78.1	68.8	54.4	43.6	63.8
	S.D.	7.759	8.792	8.699	8.384	8.[illegible]66	7.390	8.342	6.144	6.101	6.725	8.628	8.341	16.469
	TOTAL OBS	757	682	667	668	716	688	72[illegible]	686	672	683	688	745	[illegible]372
-2	MEAN	32.[illegible]	37.3	46.9	60.1	70.1	76.1	81.3	[illegible]2.[illegible]	72.8	61.2	47.2	36.9	[illegible]8.4
	S.D.	7.363	8.306	8.361	8.106	7.649	6.835	7.578	5.744	5.69[illegible]	6.516	8.185	7.793	16.942
	TOTAL OBS	78	731	675	690	742	685	728	680	678	688	702	752	[illegible]501
1-23	MEAN	2[illegible].4	32.5	41.2	54.[illegible]	62.9	70.2	76.6	77.2	68.0	55.6	42.7	32.9	53.2
	S.D.	7.004	7.556	6.784	6.471	5.849	5.466	6.305	4.510	5.481	6.365	8.229	7.8[illegible]4	18.350
	TOTAL OBS	772	709	696	672	750	689	729	718	680	675	689	784	[illegible]563
ALL HOURS	MEAN	29.7	33.5	42.3	55.3	64.8	71.9	78.0	79.2	70.3	58.3	45.0	34.6	55.[illegible]
	S.D.	9.2[illegible]8	9.715	9.792	9.831	9.696	8.285	7.947	7.044	8.059	9.772	10.290	9.645	19.580
	TOTAL OBS	5966	5468	5319	5328	5717	5352	5663	5555	5339	5288	5333	5996	66321

USAF ETAC FORM OCT 78 0-89-5 (OL A)

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

WET-BULB TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

47 12 — STATION
TAEGU AB KO — STATION NAME
68-70,73-81 — YEARS

HRS (L.S.T.)		JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT	NOV.	DEC	ANNUAL
0-02	MEAN	23.7	26.5	33.9	45.3	53.6	62.7	70.7	71.7	63.4	50.4	38.2	28.6	47.1
	S.D.	7.243	7.526	6.868	6.784	5.176	4.857	4.978	4.[illegible]93	5.958	6.732	8.530	7.844	17.984
	TOTAL OBS	730	667	652	632	672	642	668	681	650	630	646	729	8209
3-	MEAN	22.0	25.6	32.3	43.5	52.2	61.5	70.1	70.9	62.3	48.6	36.9	27.4	46.0
	S.D.	7.748	7.929	7.096	6.986	5.736	5.111	4.894	4.285	6.466	7.040	8.649	8.050	16.259
	TOTAL OBS	729	673	659	660	695	657	712	701	675	653	651	766	8231
6-	MEAN	20.7	24.1	31.5	43.8	52.7	62.[illegible]	70.2	71.0	61.9	47.8	35.7	26.3	45.4
	S.D.	7.820	8.247	7.117	7.208	5.856	4.987	4.942	4.313	6.744	7.228	8.863	7.986	18.813
	TOTAL OBS	732	681	658	656	709	643	688	682	645	624	629	711	8058
-11	MEAN	25.6	29.3	36.8	49.4	58.0	65.9	72.7	74.1	66.5	54.5	41.2	30.9	50.4
	S.D.	6.957	7.254	6.861	6.307	5.008	4.513	4.977	3.829	5.608	6.986	8.371	7.663	17.990
	TOTAL OBS	711	662	642	670	701	648	717	692	668	628	64[illegible]	716	8095
12-[illegible]	MEAN	30.8	33.7	40.9	52.4	60.3	67.6	73.8	75.3	68.1	58.0	46.5	36.2	53.5
	S.D.	6.999	7.303	7.131	6.400	4.918	4.601	4.754	3.605	5.252	5.260	8.286	7.522	16.547
	TOTAL OBS	729	664	644	666	716	686	698	706	660	700	665	765	8299
9-[illegible]	MEAN	32.4	35.4	42.2	53.5	61.1	68.0	74.4	75.6	68.4	58.4	46.5	37.4	54.3
	S.D.	6.638	7.391	7.005	6.570	4.951	4.817	4.861	3.703	5.462	5.290	7.982	7.708	16.167
	TOTAL OBS	752	675	664	666	712	685	717	683	669	682	685	739	8329
-2	MEAN	28.4	32.2	39.7	50.9	59.2	66.6	73.6	74.2	66.4	55.3	42.7	33.2	51.6
	S.D.	6.975	7.532	7.175	6.438	5.272	4.636	5.085	3.965	5.401	5.845	8.336	7.7[illegible]6	17.093
	TOTAL OBS	774	695	672	686	740	683	726	675	676	684	696	744	8451
1-23	MEAN	25.5	29.0	36.4	47.9	56.3	64.4	72.0	72.8	64.5	52.4	39.8	30.4	49.0
	S.D.	6.973	7.557	6.712	6.343	5.209	4.752	5.072	4.075	5.580	6.304	8.498	7.941	17.651
	TOTAL OBS	767	704	686	668	744	686	727	715	677	671	687	79[illegible]	8512
ALL HOURS	MEAN	26.2	29.5	36.7	48.4	56.7	64.9	72.2	73.2	65.2	53.3	40.9	31.3	49.7
	S.D.	8.138	8.482	7.925	7.545	6.213	5.340	5.197	4.353	6.285	7.291	9.194	8.652	17.850
	TOTAL OBS	5924	5421	5277	5304	5689	5330	5653	5535	5321	5272	5299	5960	69984

USAF ETAC FORM OCT 78 0-89-5 (OL A)

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

MEANS AND STANDARD DEVIATIONS

DEW-POINT TEMPERATURES DEG F FROM HOURLY OBSERVATIONS

- 312 (STATION) TAEGU AB KO (STATION NAME) 68-70,73-81 (YEARS)

HRS (L.S.T.)		JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC	ANNUAL
0-02	MEAN	16.5	19.6	27.5	40.1	49.6	60.1	69.0	70.1	61.7	48.[illegible]	34.6	23.7	43.[illegible]
	S.D.	11.656	10.776	9.997	9.093	6.828	5.842	5.328	4.413	6.480	7.265	10.580	10.138	20.447
	TOTAL OBS	730	667	652	632	672	642	668	681	650	630	646	729	8209
3-05	MEAN	15.2	19.2	26.7	39.4	49.1	59.6	68.8	69.6	61.2	47.1	33.8	23.[illegible]	42.6
	S.D.	11.134	11.064	9.884	8.830	7.017	5.759	5.160	4.531	6.743	7.509	10.759	10.026	20.611
	TOTAL OBS	729	673	659	660	695	657	712	701	675	653	651	766	8231
6-08	MEAN	14.3	18.0	26.3	40.0	49.3	59.8	68.6	69.6	60.6	46.3	32.6	22.1	42.0
	S.D.	10.946	11.319	9.834	8.953	7.016	5.652	5.204	4.525	7.090	7.666	10.883	10.[illegible]72	20.936
	TOTAL OBS	732	681	658	656	709	643	688	682	645	624	629	711	[illegible]58
9-11	MEAN	17.5	21.2	28.1	41.8	51.0	61.3	69.7	71.0	63.1	50.2	35.4	24.9	44.6
	S.D.	10.732	10.640	10.329	9.145	7.364	5.938	5.152	4.411	6.696	7.384	11.283	10.090	20.446
	TOTAL OBS	711	662	642	670	701	648	717	692	668	628	640	716	8299
12-14	MEAN	19.2	22.6	28.5	41.5	50.5	60.9	69.6	70.7	62.7	50.3	36.4	26.8	44.9
	S.D.	11.281	11.323	11.021	10.263	8.060	6.484	4.924	4.510	6.983	7.434	11.546	10.459	19.906
	TOTAL OBS	729	664	644	666	716	686	698	706	660	700	665	765	8299
15-17	MEAN	20.7	23.4	29.0	42.0	50.6	60.8	70.0	70.8	62.7	49.9	37.1	27.7	45.2
	S.D.	11.367	11.090	10.851	10.547	8.490	6.839	5.128	4.745	7.455	7.698	11.062	10.573	19.587
	TOTAL OBS	752	675	664	666	712	685	717	683	669	682	685	739	8329
18-20	MEAN	18.9	22.5	29.3	41.5	50.6	60.7	70.1	70.6	62.5	50.2	36.7	26.4	44.7
	S.D.	10.831	10.983	10.587	9.513	8.181	6.188	5.371	4.615	6.820	7.237	11.023	10.285	19.835
	TOTAL OBS	774	695	672	686	740	683	726	675	676	684	696	744	8451
21-23	MEAN	17.6	21.2	28.6	41.0	50.7	60.7	69.7	70.5	62.2	49.5	35.6	25.[illegible]	44.1
	S.D.	11.713	11.171	10.076	9.063	7.300	5.910	5.457	4.544	6.419	7.182	10.715	10.473	20.217
	TOTAL OBS	767	704	686	668	744	686	727	715	677	671	687	780	8512
ALL HOURS	MEAN	17.5	21.0	28.0	40.9	50.2	60.5	69.5	70.4	62.1	49.0	35.3	25.0	43.9
	S.D.	11.008	11.183	10.371	9.486	7.589	6.116	5.241	4.560	6.885	7.556	11.071	10.420	20.276
	TOTAL OBS	5924	5421	5277	5314	5689	5330	5653	5535	5320	5272	5299	5960	65984

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
12	TAEGU AB KO	69-73,74-81	JAN

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JAN	00-02	100.0	99.9	98.1	94.2	84.9	71.5	46.8	24.9	7.7	58.2	777
	03-05	100.0	99.7	97.9	94.8	87.8	76.0	52.5	28.4	9.3	59.7	781
	06-08	100.0	99.7	98.4	96.4	93.4	79.9	58.1	37.1	12.6	70.1	739
	09-11	100.0	99.6	96.9	90.2	79.7	60.5	39.4	21.1	8.4	64.9	711
	12-14	100.0	97.7	91.8	77.4	50.6	26.3	12.5	6.6	2.6	52.7	770
	15-17	100.0	98.4	94.8	71.1	46.3	24.6	11.2	7.7	3.8	54.1	751
	18-20	100.0	99.2	96.6	87.5	70.9	44.1	18.5	11.7	3.6	58.9	774
	21-23	100.0	99.5	97.7	92.0	80.4	64.7	37.0	19.1	4.6	65.4	767
TOTALS		100.0	99.2	96.7	88.3	73.9	56.0	34.4	18.4	6.5	62.9	5904

USAFETAC FORM AWS 64 0-87-5 (OL A)

AL CLIMATOLOGY BRANCH
TAC
ATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
[illegible]	[illegible] AB KO	72-76,74-81	FEB

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
[illegible]	[illegible]	[illegible]	[illegible]	99.	95.3	85.2	69.1	47.8	[illegible]	[illegible]	65.7	667
	[illegible]	100.0	[illegible]	98.5	96.6	89.7	74.4	51.1	[illegible]	[illegible]	[illegible]	673
	[illegible]	100.0	[illegible]	98.7	97.1	90.3	78.9	56.3	32.6	14.8	[illegible]	681
	[illegible]	100.0	99.8	97.0	90.8	74.9	56.0	34.9	[illegible]	7.1	62.7	662
	[illegible]	[illegible]	97.9	[illegible]	70.6	49.1	31.6	17.5	[illegible]	3.6	[illegible]	664
	[illegible]	[illegible]	97.5	87.9	63.1	41.6	26.2	14.4	[illegible]	3.0	[illegible]	675
	[illegible]	100.0	99.6	96.7	80.3	[illegible]	40.3	20.6	11.9	4.9	57.4	695
	[illegible]	100.0	100.0	98.9	93.2	76.8	57.7	36.8	16.6	[illegible]	[illegible]	[illegible]
TOTALS		[illegible]	99.3	[illegible]	85.9	[illegible]	54.3	34.9	[illegible]	7.7	[illegible]	[illegible]

USAFETAC FORM JUN 64 0-87-5 (OL A)

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
[illegible]	TAEGU AB KO	69-73,74-81	MAR

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
MAR	03-02	100.0	100.0	99.1	94.3	85.3	71.6	43.9	23.3	7.3	65.4	652
	06-05	100.0	100.0	100.0	96.4	89.5	76.8	56.0	27.3	15.5	70.3	659
	09-08	100.0	100.0	99.8	97.0	90.9	81.8	61.4	41.4	17.8	74.4	658
	12-11	100.0	99.8	95.6	86.1	66.8	46.4	25.9	13.4	4.4	59.5	642
	15-14	100.0	99.1	83.1	60.6	31.0	16.2	11.0	6.5	3.1	45.7	644
	18-17	100.0	97.3	75.6	53.3	29.7	16.0	9.8	6.6	2.6	44.7	664
	21-20	100.0	99.0	92.7	72.2	48.2	31.0	17.6	9.4	3.9	53.2	67[illegible]
	24-23	100.0	100.0	98.4	90.8	75.8	56.3	27.6	14.3	5.7	62.7	626
TOTALS		100.0	99.4	93.[illegible]	81.3	64.8	49.9	31.7	16.2	7.5	6[illegible].3	5277

USAFETAC FORM 0-87-5 (OL A)

...IMATOLOGY BRANCH
...TAC
...WEATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
...17	...EED AB, K...	69-7..,74-79,81	APR

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
APR	0-02	100.0	100.0	100.0	97.9	89.4	72.2	54.7	27.4	1 .3	7 .8	632
	3-05	100.0	100.0	99.7	99.2	96.1	84.8	68.0	43.5	15.5	70.3	66.
	06-08	100.0	100.0	100.0	99.1	96.5	88.6	73.2	45.2	15.4	7..	656
	09-11	100.0	99.7	97.9	89.6	71.2	45.2	27.8	11.5	3.7	60.2	67.
	1 -14	100.0	97.6	84.2	60.2	37.5	22.4	13.2	6.8	2.9	44.1	566
	15-17	99.8	95.8	77.6	53.3	35.6	23.7	14.3	8.1	2.4	46.6	666
	18-2.	100.0	99.5	89.5	69.2	50.1	31.0	21.7	11.1	4.5	53.2	6F6
	21-23	100.0	100.0	99.	92.1	75.7	53.3	35.9	17.4	6.7	63.3	668
TOTALS		100.0	99.0	93.5	82.6	69.0	52.7	38.5	21.9	8.1	62..	5304

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

47212 | TAEGU AB KO | 69-73,74-79,81 | MAY

STATION | STATION NAME | PERIOD | MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
MAY	00-02	100.0	100.0	100.0	98.5	93.8	81.3	67.7	38.1	11.2	74.3	674
	03-05	100.0	100.0	100.0	99.3	97.3	92.2	82.7	58.7	20.0	80.3	695
	06-08	100.0	100.0	100.0	100.0	96.1	90.1	78.4	46.3	13.3	77.8	709
	09-11	100.0	100.0	97.4	86.4	69.3	45.6	24.5	10.4	2.6	59.1	701
	12-14	100.0	98.3	83.5	59.2	37.4	22.8	14.1	5.3	1.8	48.1	719
	15-17	100.0	96.9	75.3	52.2	35.3	21.3	14.5	6.6	2.0	46.3	719
	18-20	100.0	99.5	88.6	71.5	50.7	32.8	20.1	9.6	3.0	52.9	740
	21-23	100.0	100.0	99.6	95.0	82.3	62.8	42.2	16.7	6.3	66.1	744
TOTALS		100.0	99.3	93.1	82.8	70.3	56.1	43.0	23.2	7.5	63.1	5689

USAFETAC FORM JUN 64 0-87-5 (OL A)

...AL CLIMATOLOGY BRANCH
...ETAC
...WEATHER SERVICE/MAC

RELATIVE HUMIDITY

3212	TAEGU AB KO	68-70,74-79	JUN
STATION	STATION NAME	PERIOD	MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUN	00-02	100.0	100.0	100.0	99.8	98.6	95.3	83.2	56.4	17.7	8 .7	642
	03-05	100.0	100.0	100.0	100.0	99.5	98.6	93.3	72.6	30.9	85.1	657
	06-08	100.0	100.0	100.0	100.0	99.8	98.0	89.4	61.6	22.1	82.5	643
	09-11	100.0	100.0	99.8	98.3	88.1	67.7	39.2	17.4	4.0	67.1	648
	12-14	100.0	99.9	97.4	86.6	58.0	32.9	19.0	9.8	1.5	56.1	686
	15-17	100.0	99.3	95.5	76.9	52.3	30.5	17.5	7.7	1.8	53.8	689
	18-20	100.0	100.0	98.4	89.8	70.3	49.9	29.8	13.3	2.3	63.8	683
	21-23	100.0	100.0	100.0	99.4	94.8	82.7	60.5	31.2	8.0	73.0	686
TOTALS		100.0	99.9	98.9	93.9	82.6	69.5	53.9	33.8	11.2	69.8	5337

USAFETAC FORM JUL 64 0-87-5 (OL A)

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

47212 | TAEGU AB KO | 68-73,74-79 | JUL

STATION | STATION NAME | PERIOD | MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUL	00-02	100.0	100.0	100.0	100.0	99.9	99.4	95.8	75.3	25.9	84.9	664
	03-05	100.0	100.0	100.0	100.0	100.0	99.7	98.9	89.2	39.5	88.1	712
	06-08	100.0	100.0	100.0	100.0	100.0	99.7	95.5	77.1	33.4	86.0	688
	09-11	100.0	100.0	100.0	100.0	98.9	87.0	57.6	31.0	9.9	74.0	717
	12-14	100.0	100.0	100.0	98.1	86.9	58.7	34.0	17.6	4.2	69.5	696
	15-17	100.0	100.0	100.0	96.8	79.4	52.6	33.9	16.5	5.2	68.9	717
	18-20	100.0	100.0	100.0	99.0	92.7	76.2	46.6	24.7	8.3	73.0	726
	21-23	100.0	100.0	100.0	100.0	99.7	96.8	83.9	48.5	14.6	79.5	727
TOTALS		100.0	100.0	100.0	99.2	94.7	83.8	67.9	46.3	17.6	76.5	5653

USAFETAC FORM AUG 84 0-87-5 (OL A)

GLOBAL CLIMATOLOGY BRANCH
USAETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

47212	TAEGU AB KO	63-73,74-79	AUG
STATION	STATION NAME	PERIOD	MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
AUG	00-02	100.0	100.0	100.0	100.0	100.0	99.9	98.4	76.7	25.1	85.4	681
	03-05	100.0	100.0	100.0	100.0	100.0	99.9	98.7	89.9	39.9	88.4	701
	06-08	100.0	100.0	100.0	100.0	100.0	99.6	98.1	91.7	32.4	86.9	682
	09-11	100.0	100.0	100.0	100.0	99.4	87.7	51.9	19.1	6.5	72.3	692
	12-14	100.0	100.0	100.0	99.0	86.8	46.5	19.7	10.2	2.4	62.2	706
	15-17	100.0	100.0	100.0	96.9	78.5	42.5	22.7	11.3	3.1	61.9	683
	18-20	100.0	100.0	100.0	99.3	95.1	76.0	39.9	17.8	5.6	69.3	675
	21-23	100.0	100.0	100.0	100.0	100.0	98.5	65.3	46.2	12.7	80.3	715
TOTALS		100.0	100.0	100.0	99.4	95.0	81.3	64.3	44.1	16.7	79.7	5535

USAFETAC FORM 0-87-5 (OL A)

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
[illegible]	FALSO AB KO	68-73,74-79	SEP

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
[illegible]	[illegible]-02	100.0	100.0	100.0	100.0	100.0	99.4	96.3	[illegible]	71.1	96.6	650
	03-05	100.0	100.0	100.0	100.0	100.0	100.0	98.4	92.3	57.5	91.4	675
	06-08	100.0	100.0	100.0	100.0	99.7	98.9	96.7	87.1	53.6	89.7	645
	09-11	100.0	100.0	100.0	99.7	97.2	88.9	62.7	32.3	6.5	74.2	668
	12-14	100.0	100.0	99.5	97.6	77.7	47.6	22.0	10.3	2.9	61.5	656
	15-17	100.0	100.0	99.6	93.4	74.4	43.6	24.2	11.3	3.9	60.7	669
	18-20	100.0	100.0	100.0	99.4	95.1	78.3	49.6	23.4	7.4	71.9	675
	21-23	100.0	100.0	100.0	99.9	99.7	98.7	89.1	61.6	16.1	81.9	677
TOTALS		100.0	100.0	99.9	98.8	93.0	81.9	67.4	50.1	22.4	76.9	5320

USAFETAC FORM JUL 64 0-87-5 (OL A)

GLOBAL CLIMATOLOGY BRANCH
USAPETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
[illegible]12	TAEGU AB KO	68-69,73-79	OCT

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
OCT	00-02	100.0	100.0	100.0	100.0	99.5	97.3	92.5	77.3	39.[illegible]	[illegible]6.2	63
	03-05	100.0	100.0	100.0	100.0	99.8	97.9	94.6	84.5	64.0	[illegible]9.4	653
	06-08	100.0	100.0	100.0	99.8	99.5	96.3	94.4	87.5	63.3	90.1	694
	09-11	100.0	100.0	99.7	98.7	94.9	79.5	58.4	29.8	9.6	72.5	628
	12-14	100.0	100.0	98.1	88.1	56.9	27.3	14.9	7.3	3.0	55.4	7[illegible]0
	15-17	100.0	100.0	95.7	83.1	47.9	25.7	12.0	7.6	3.2	52.6	687
	18-20	100.0	100.0	99.7	98.7	92.8	71.8	43.6	16.4	5.7	68.2	624
	21-23	100.0	100.0	100.0	100.0	99.3	96.0	86.4	51.9	13.6	[illegible]4	671
TOTALS		100.0	100.0	99.2	95.7	86.6	74.0	62.1	45.3	25.2	74.4	5272

...L CLIM TOLOGY BRANCH
...PETAC
A... WEATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
4212	TAEGU AB KO	63-69,73-79	JUL

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JUL	00-02	100.0	100.0	100.0	99.7	96.7	89.8	75.4	62.1	30.2	71.4	646
	03-05	100.0	100.0	100.0	99.5	97.7	90.2	78.3	61.5	43.6	77.7	651
	06-08	100.0	100.0	100.0	99.4	97.3	90.0	79.3	66.9	43.6	83.7	629
	09-11	100.0	100.0	99.4	95.5	85.5	66.1	46.3	31.7	15.5	73.3	643
	12-14	100.0	99.8	97.3	64.1	53.1	29.6	15.8	7.4	4.1	55.2	561
	15-17	100.0	100.0	96.1	80.0	55.2	27.3	14.7	6.3	4.1	54.2	585
	18-20	100.0	100.0	99.6	96.4	87.4	69.0	43.2	20.1	5.9	67.9	696
	21-23	100.0	100.0	100.0	99.3	96.2	85.2	67.1	47.3	17.9	77..	687
TOTALS		100.0	100.0	99.0	94.2	84.2	68.4	52.8	39..	2 .9	71.0	5299

USAPETAC FORM JUL 64 0-87-5 (OL A)

AL CLIMATOLOGY BRANCH
ETAC
SERVICE/MAC

RELATIVE HUMIDITY

7112 TAEGU AB KO | 68-69,73-75 | DEC

STATION | STATION NAME | PERIOD | MONTH

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE (FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO. OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
DEC	00-02	100.0	100.0	100.0	99.2	95.5	86.5	62.7	44.7	20.3	76.3	739
	03-05	100.0	100.0	99.9	99.5	96.9	89.7	68.7	45.7	23.9	78.4	766
	06-08	100.0	100.0	100.0	99.3	96.9	89.2	73.	54.9	30.2	81.	771
	09-11	100.0	100.0	100.0	97.3	88.7	71.9	49.7	31.6	12.3	7 .9	775
	12-14	100.0	99.7	97.5	88.2	60.9	35.2	14.6	7.7	3.3	56.6	760
	15-17	100.0	99.9	97.7	84.4	55.6	31.3	15.4	8.6	2.4	55.1	739
	18-20	100.0	100.0	100.0	96.9	85.6	65.6	38.6	18.8	8.1	68.4	744
	21-23	100.0	100.0	99.9	98.3	92.8	81.0	56.5	37.8	13.3	73.7	78
TOTALS		100.0	100.0	99.4	95.4	84.1	63.8	47.4	31.1	14.4	69.7	5961

USAFETAC FORM JUL 64 0-87-5 (OL A)

CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC

RELATIVE HUMIDITY

STATION	STATION NAME	PERIOD	MONTH
[illegible]	[illegible]	[illegible]	ALL

CUMULATIVE PERCENTAGE FREQUENCY OF OCCURRENCE
(FROM HOURLY OBSERVATIONS)

MONTH	HOURS (L.S.T.)	PERCENTAGE FREQUENCY OF RELATIVE HUMIDITY GREATER THAN									MEAN RELATIVE HUMIDITY	TOTAL NO OF OBS.
		10%	20%	30%	40%	50%	60%	70%	80%	90%		
JAN	ALL	100.0	99.2	96.[illegible]	88.0	73.9	56.0	34.4	15.4	5.5	67.3	[illegible]24
FEB		100.0	99.3	95.9	85.9	71.[illegible]	54.3	34.9	2[illegible].4	7.7	[illegible].7	[illegible]
MAR		100.0	99.4	97.0	81.3	64.8	49.8	31.7	19.2	7.5	6[illegible].3	5277
APR		100.0	99.3	93.5	82.6	69.0	52.7	36.5	2[illegible].[illegible]	[illegible].1	[illegible].[illegible]	[illegible]4
MAY		100.0	99.3	93.1	82.8	70.3	56.1	43.[illegible]	[illegible].[illegible]	7.5	67.1	5[illegible]9
JUN		100.0	99.9	98.9	93.9	82.6	69.5	53.9	33.6	11.[illegible]	6[illegible].5	[illegible]37
JUL		100.0	100.0	100.0	99.2	94.7	83.8	67.9	46.[illegible]	17.6	7[illegible].[illegible]	5[illegible]3
AUG		100.0	100.0	100.0	99.4	95.0	81.3	64.3	44.1	17.0	75.7	[illegible]53[illegible]
SEP		100.0	100.0	99.9	98.8	93.0	81.9	67.4	[illegible].1	22.4	76.9	[illegible]32[illegible]
OCT		100.0	100.0	99.2	95.7	86.6	74.0	62.1	45.3	25.2	74.4	[illegible].7[illegible]
NOV		100.0	100.0	99.0	94.2	84.2	68.4	52.9	39.[illegible]	27.9	7[illegible].6	5299
DEC		100.0	100.0	99.4	95.4	84.1	68.8	47.4	31.1	14.4	6[illegible].7	[illegible]96[illegible]
TOTALS		100.0	99.7	97.3	91.4	80.8	66.4	49.9	[illegible].8	13.7	68.5	61[illegible]84

U S AIR FORCE
ENVIRONMENTAL TECHNICAL
APPLICATIONS CENTER

PART F PRESSURE SUMMARY


Presented in this part are two tables giving the means, standard deviations, and total number of observations of station pressure and sea-level pressure by month and annual for the local hourly observations corresponding to the eight 3-hourly synoptic times GCT. The same computations are also provided at the bottom of the page for all hours combined. All years of data available are combined in both of these tables, although the overall period is limited by service as indicated below.

NOTES: Station pressure not reported for all services until late in 1945.
Station pressure reported only at 6-hourly times for Air Force stations from Jan 64 - Jul 65.
METAR stations do not report Sea-level pressure for the period Jan 68 - Dec 70.

1. Station pressure is presented in the table in inches of mercury.

2. Sea-level pressure is presented in millibars. DATA NOT AVAILABLE

Provided below is a scale to convert station pressure values in inches of mercury or millibars to pressure-altitude in 1000's of feet. This scale is an enlarged model of the pressure-altitude scale in the Smithsonian Meteorological Tables.

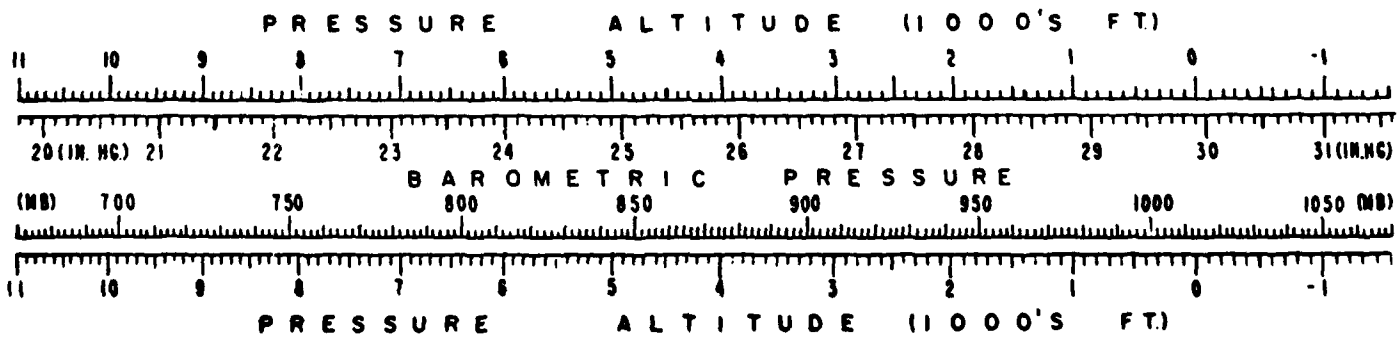

F

GLOBAL CLIMATOLOGY BRANCH
USAFETAC
AIR WEATHER SERVICE/MAC


MEANS AND STANDARD DEVIATIONS

STATION PRESSURE IN INCHES HG FROM HOURLY OBSERVATIONS

STATION	STATION NAME	YEARS
[illegible]12	[illegible]AEGO AB KO	68-70,73-81

HRS (LST)		JAN.	FEB.	MAR.	APR.	MAY	JUN.	JUL.	AUG.	SEP.	OCT.	NOV.	DEC.	ANNUAL
[illegible]	MEAN	30.073	30.050	29.973	29.851	29.742	29.647	29.618	29.649	29.[illegible]79	29.963	30.070	30.[illegible]96	29.882
	S D	.144	.160	.160	.163	.144	.129	.117	.141	.121	.147	.155	.146	.228
	TOTAL OBS	248	233	225	221	227	220	235	227	217	216	221	254	2742
	MEAN	30.074	30.038	29.979	29.846	29.725	29.641	29.602	29.644	29.792	29.966	30.080	30.092	29.875
	S D	.147	.166	.154	.166	.150	.134	.123	.139	.125	.153	.151	.144	.232
	TOTAL OBS	264	216	221	216	228	226	232	232	229	225	218	261	2748
	MEAN	30.071	30.043	29.977	29.844	29.742	29.649	29.604	29.639	29.800	29.971	30.071	30.081	29.875
	S D	.146	.167	.172	.162	.147	.134	.132	.137	.126	.156	.160	.148	.232
	TOTAL OBS	254	229	221	218	238	224	232	229	221	214	215	239	2734
	MEAN	30.091	30.065	30.011	29.877	29.750	29.658	29.628	29.660	29.823	29.993	30.110	30.117	29.897
	S D	.145	.171	.157	.161	.146	.141	.125	.141	.129	.162	.164	.149	.236
	TOTAL OBS	236	228	215	227	229	223	235	246	210	207	213	247	2715
	MEAN	30.074	30.049	29.985	29.852	29.741	29.636	29.610	29.646	29.811	29.970	30.077	30.088	29.879
1	S D	.147	.166	.169	.164	.150	.137	.122	.142	.118	.152	.149	.153	.232
	TOTAL OBS	239	221	210	223	237	223	239	230	215	226	214	251	2728
	MEAN	30.013	29.987	29.918	29.789	29.677	29.600	29.581	29.607	29.770	29.920	30.024	30.036	29.828
	S D	.147	.162	.154	.156	.144	.133	.117	.142	.115	.146	.148	.148	.223
	TOTAL OBS	242	216	219	222	237	232	241	222	222	218	239	248	2758
	MEAN	30.024	29.998	29.904	29.773	29.669	29.580	29.567	29.603	29.768	29.930	30.038	30.054	29.827
	S D	.139	.166	.154	.155	.139	.139	.119	.136	.125	.138	.155	.152	.231
	TOTAL OBS	248	232	232	234	246	227	246	222	218	230	227	251	2613
	MEAN	30.062	30.030	29.957	29.829	29.717	29.627	29.594	29.641	29.812	29.963	30.070	30.079	29.869
1	S D	.145	.156	.161	.160	.139	.125	.119	.149	.122	.144	.156	.145	.229
	TOTAL OBS	266	235	230	224	243	221	250	235	231	231	232	266	2866
	MEAN	30.050	30.033	29.962	29.832	29.720	29.63[illegible]	29.600	29.637	29.798	29.959	30.067	30.081	29.866
ALL HOURS	S.D.	.147	.166	.163	.164	.148	.136	.123	.142	.123	.151	.156	.15[illegible]	.232
	TOTAL OBS	1975	1810	1773	1785	1885	1796	1910	1843	1763	1767	1779	2[illegible]17	22[illegible]4

USAF ETAC FORM OCT 78 0-89-5 (OL A)

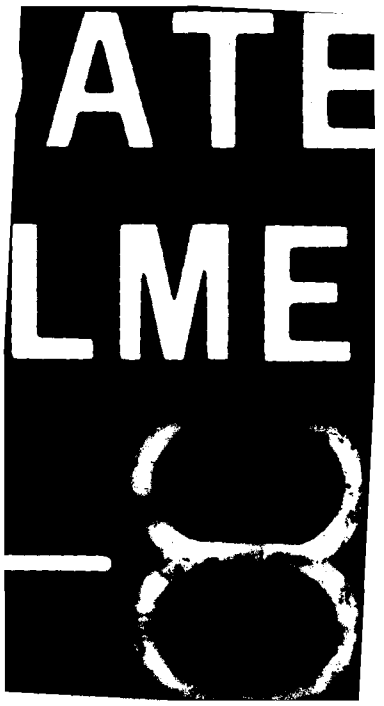
ATE
LME