

AD-A114 135 NAVAL OCEAN RESEARCH AND DEVELOPMENT ACTIVITY NSTL S--ETC F/G 8/3
OCEAN CURRENT EFFECTS ON MARINE SEISMIC SYSTEMS AND DEPLOYMENTS--ETC(U)
JAN 82 J D BOYD
UNCLASSIFIED NORDA-TN-132 NL

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

END

DATE

FILED

5 82

DTIC

AD A114135

FILE COPY

DISTRIBUTION STATEMENT A
Approved for public release
Distribution Unlimited

ABSTRACT

Upper level and near bottom current measurements were made near DSDP Hole 395A (22°45'N, 46°10'W) in March-April 1981 in support of the at-sea test of the Marine Seismic System Project. Four upper ocean current profiles were made during initial deployment of the borehole seismometer. Readings were noticeably contaminated by ship motion, but clearly indicated a variable yet generally slow current regime which posed minimal threat of cable entanglement. Current measurements made 5 m off bottom during seismometer testing showed marked spectral peaks at semidiurnal and inertial frequencies. Mean speed of 4.4 cm/sec and maximum speed of 9 cm/sec were low but possibly of sufficient magnitude to cause contamination of concurrently deployed ocean bottom seismometer records with hydrodynamically generated noise. Other studies have confirmed noise contamination of OBS records by near bottom currents, with a possible 10 cm/sec threshold for its importance. While methods to detect and eliminate the noise might be developed, instrument testing and redesign to reduce sensitivity to contamination is probably wiser.

DTIC
SELECTED
MAY 5 1982
H

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

ACKNOWLEDGEMENTS

This technical note is the Final Report for NORDA Code 331 project "Ocean Current Effects on Marine Seismic Systems and Deployments" partially funded by NORDA Code 543 contract D3311A00. The work was obviously possible only with the fine assistance of the officers and crew of the USNS LYNCH, E. Myer commanding. Special thanks goes to Lou Banchemo and Steve Sova who repaired, checked out, deployed, recovered and otherwise cared for the equipment used. Program managers Al Ballard and Mike Harris fulfilled their responsibilities with tact, understanding and, in several cases, great creativity and persistence. I am particularly indebted to Dr. Albert Green for valuable discussions and guidance and to Mike Stirgus for much computing assistance.

CONTENTS

	<u>PAGE</u>
List of Tables	iv
List of Figures	iv
I. Introduction	1
II. Background	1
A. Upper-level current profiles	1
B. Hydrodynamically generated noise	2
III. Measurements	4
IV. Presentation of data	4
A. Upper level current profiles	4
B. Near bottom data editing and time series	6
C. Near bottom current statistics	7
D. Near bottom current spectra	7
V. Summary and conclusions	8
VI. References	12
Tables	14
Figures	18
Appendix - Near surface current profiles taken with the NBIS DRCM during deployment of MSS borehole instrumen- tation package.	34



Accession For	
NBIS CP&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
<i>A</i>	

TABLES

	<u>PAGE</u>
Table 1. Details of MSS current meter moorings	14
2. Meter 289 basic current statistics	15
3. Meter 300 basic current statistics	16
4. Diameters of cylindrical bodies oscillating at the extreme values of the OBS frequency range	17

FIGURES

Figure 1. Locations of current meters, Hole 395A, and operational OBS	18
2. Meter 289 current time series	19
3. Meter 300 current time series	20
4. Meter 289 temperature time series	21
5. Meter 300 temperature time series	22
6. Meter 289 current speed and direction histograms	23
7. Meter 300 current speed and direction histograms	24
8. Meter 289 progressive vector diagram	25
9. Meter 300 progressive vector diagram	26
10. Meter 289 u(east) spectrum	27
11. Meter 289 v(north) spectrum	28
12. Meter 289 rotary spectra	29
13. Meter 300 u(east) spectrum	30
14. Meter 300 v(north) spectrum	31
15. Meter 300 rotary spectra	32
16. Strumming frequency versus current speed for cylindrical bodies of various diameters	33

I. Introduction

Two types of physical oceanographic measurements were supplied by NORDA Code 331 in support of the March-April 1981 at-sea test of the Marine Seismic System (MSS) Project. Four profiles of ocean currents in the upper 1000 meters were taken from the USNS LYNCH with a Neil Brown Instrument Systems (NBIS) direct reading current meter (DRCM) prior to and during deployment of the borehole seismometer. Completed profiles were transmitted immediately to the CHALLENGER where the data were used to orient the ship so as to avoid entanglement of the seismometer cable with the drill string. In addition, two Sea Link System vector averaging current meters (VACM's) were deployed approximately five meters off the bottom to help estimate hydrodynamic noise contamination of the records of concurrently deployed ocean bottom seismometers (OBS's). Details of the VACM deployment are given in Table 1; positions of the VACM's, the operational OBS, and DSDP Hole 395A are shown in Figure 1. Positions of DRCM casts were within about 0.5 n mi of Hole 395A. This report summarizes the results of the DRCM casts and the two VACM deployments, comments on the DRCM results, and discusses the contamination of seismometer signals by hydrodynamic noise.

II. Background

II-A. Upper Level Current Profiles

The possibility of entanglement of the borehole seismometer cable with the drill string was a major concern during deployment of the package. Upper level current measurements were needed during the seismometer deployment because it was felt that were the currents known, the CHALLENGER could be oriented so as to keep the cable downstream of the drill string. Along with several other measures, such positioning should substantially reduce the risk of entanglement. Equipment suitable for making accurate real time current measurements deeper than a few hundred meters was (and is) severely limited, particularly within the budgetary

restrictions of the project. The NBIS direct reading current meter selected (underwater unit model DRCM-1, deck unit CMDT-1) was a new, readily available, but relatively untested meter using, however, previously developed and proven technology.

II-B. Hydrodynamically Generated Noise

Some unpublished results have shown near bottom currents can produce noise contamination in OBS records (Sutton, et al., 1981, Duennebier, et al., 1981). One aspect of the Lopez Island OBS Intercomparison Experiment (Sutton, et al., 1981, and other papers in that issue) was to examine sensitivity of different OBS systems to contamination from hydrodynamically generated noise. Results were inconclusive, but current speeds were low, a maximum of 6 cm/sec. Mean currents near DSDP Hole 395A were anticipated to be low (Wilcox, 1978), but there was no direct knowledge from the site. Since hydrodynamically induced noise is generally recognized as a possible problem with OBS's, it was felt that a knowledge of currents near the site could be valuable in identifying the sources of anomalous signals should they show up in the seismic records of the OBS's or borehole seismometer.

Currents can generate noise in seismic records in three ways. The first occurs when the fluid motion is highly turbulent. The drag and lift forces exerted on an instrument by the fluctuating flow may cause actual small motions or vibrations of the object which are recorded as noise. The second is by current generated noise being transmitted through the bottom and being picked up by the instrument. The noise may occur when random pressure fluctuations of the turbulent boundary layer actually disturb the bottom sediments, or nearby equipment may be disturbed by the turbulent flow with the motion being transmitted through the bottom. Under the low current speeds expected near Hole 395A, these sources of noise are unlikely to be as important as the third mechanism, the

shedding of vortices from objects located in the flow.

The character of fluid flow past an object is largely determined by the Reynolds number, Re , defined as

$$Re = \frac{U \cdot d}{\nu}$$

where U is a characteristic speed of the flow, d a characteristic dimension of the object, and ν the kinematic viscosity. At low Re the fluid flow closely follows the contours of the body, but above a critical Re the boundary layer separates from the body and forms a turbulent wake. Up to a certain maximum Re the separation for some body shapes occurs nearly periodically in the form of shedding of pairs of alternate sense vortices. Separation and wake formation causes a reduced pressure gradient in the lee of the object, particularly on the side from which a vortex is shed. The shedding of opposite-sense vortices in a wake produces nearly periodic forces on the body at the Strouhal frequency f_s . This is the source of aeolian tones caused by wind over wires under tension and the "strumming" of hydrographic cables during CTD casts. For cylindrical bodies normal to the flow and for $4 \times 10^1 < Re < 4 \times 10^5$ this frequency is given by

$$f_s = \frac{U \cdot S}{d}$$

where S is the Strouhal number (Batchelor, 1967). (There is some dependence on geometry and turbulence level of the free stream, but this gives f_s well within an order of magnitude.) For $Re > 200$, the Strouhal number may be taken for our purposes as a constant .2 (Gerrard, 1978).

The sensitive range of many contemporary seismometers includes the range of Strouhal frequencies due to currents that one would expect to encounter in the deep ocean. For example, the University of Texas OBS's used in the recent MSS cruise have a range of about .01 - 30 Hz (R. Jacobsen, personal communication). In his summary of deep ocean current speeds, Wilcox (1978) found a mean deep current speed in the Eastern Atlantic of about 5 cm/s. For a 1" cable this

translates into a Strouhal frequency of about .4 Hz.

It is clear, then, that there is potential for the contamination of seismometer readings by noise from turbulent eddy shedding. Whether this contamination actually occurs or not remains to be seen.

III. Measurements

The NBIS direct reading current meter selected for the upper level current profiles had a specified speed accuracy of ± 1 cm/s or 5% (whichever greater). Direction accuracy was $\pm 5^\circ$ for speeds greater than 10 cm/s. Pressure was accurate to ± 1 decibar and precise to $\pm .05$ decibar (A.W. Green, personal communication). One minute vector averages of speed and direction were recorded and pressure was periodically checked to provide depth values.

Near bottom measurements were taken with Sea Link vector averaging current meters (model 610), which recorded average speed, direction and temperature every 15/16 minutes. Speed was accurate to ± 1 cm/s or better, and the threshold of the Savonius rotor was 3 cm/sec or lower. Direction was accurate to $\pm 3^\circ$. The installed thermistors were accurate to $\pm .1^\circ\text{C}$ and precise to $\pm .01^\circ\text{C}$. The manufacturer's manual (AMF, 1976) gives further details on instrument construction, and Woodward and Appel (1973) and McCullough (1975) describe determination of accuracies. The mechanical rotor of the VACM tends to stall at low current speeds, so the VACM was not the optimal instrument for the low currents anticipated. However, it was the only meter type available with a pressure casing suitable for the 4500 m depth. In spite of current speeds near rotor stall speed, the two instruments performed adequately.

IV. Presentation of Data

IV-A. Upper Level Current Profiles

Velocity profiles taken with the DRCM during the seismometer deployment are given in the Appendix. Near the end of the fourth cast occasional erratic

behavior occurred and the equipment failed at the beginning of the fifth. Attempts to diagnose the problem were unsuccessful except to indicate the problem probably lay in the underwater unit rather than the deck unit. The equipment was later returned to NBIS where they found a manufacturing error had caused a seal failure and seawater leakage sometime during the profiling, presumably towards the end of cast 4 or the beginning of cast 5.

The indeterminacy of the failure time precludes a strict evaluation of the quality of the profile data. There are considerable differences between profiles. In particular, the first cast showed substantially higher current speeds than succeeding casts. However, fixes taken by ship's personnel on the CHALLENGER every 20 minutes during the profiling indicated a drift of 1/3-1/2 kt to the northeast during the first cast, a larger drift than at any other time during the profiling. (A considerable wire angle was also noted at this time.) Perhaps the higher observed values for this profile were indeed correct, due to wind or surface current induced ship motion or to a transient, highly energetic current regime.

There is no question that ship motion affected the DRCM readings at other times. During periods of swell when the LYNCH rolled substantially, the pressure values commonly indicated vertical excursions of more than ± 5 dbar. When the wire from the hydrographic winch executed a circular motion at the surface, instantaneous direction measurements often changed rapidly and monotonically.

It seems reasonable to conclude that the DRCM and deck unit performed adequately until the end of cast 4 or the beginning of cast 5. However, the measurements were contaminated by ship motion. It was known from the beginning that ship motion would affect the DRCM data, but neither time nor resources were available to compensate for the motion. The purpose of the DRCM was to furnish approximate (± 20 cm/s) upper bounds for the currents, and it appeared to satisfy

this requirement until obvious failure.

IV-B. Near Bottom Data Editing and Time Series

The near bottom velocity data were first plotted as time series to examine each record for anomalous data, and records were discarded for those times the meters were not on the bottom. Meter 289 performed well. Occasional isolated spikes - usually from erroneous direction values - were replaced with linearly interpolated values. The final series for meter 289 is given in Fig. 2. Meter 300 performed satisfactorily in view of the very low current speeds encountered, but had a higher stalling threshold than meter 289, as seen in Fig. 3. Superposition of Figures 2 and 3 show, however, that when meter 300 was not stalled the measured current speeds and directions for both were quite similar. Current speeds tended to be low (below 10 cm/s) with minor high frequency fluctuations superimposed upon a very distinct periodicity of about 2 cpd. Direction changed continuously with a period somewhat greater than 1 day. These motions were later explained when spectral analysis confirmed considerable energy at the inertial-diurnal (given our frequency resolution, they are close, 31 hr period versus 23.9 hr period) and semidiurnal frequencies.

Temperature time series from both meters were examined for anomalous data and records discarded from those times the meters were not in position. No editing was required. The temperature was nearly constant for both series (Figures 4 and 5). The VACM temperature sensor is located on top of the meter case and the approximately 12 hour duration transient at the beginning of each record can be attributed to the effects of convection of water warmed by the meter case before it reached ambient temperature. Once the cases reached ambient temperature, measured temperatures held very constant at about 2.4°C as would be expected for the anticipated North Atlantic Bottom Water (NAVOCEANO, 1966, and Fleischer, 1980).

IV-C. Near-Bottom Current Statistics

Figures 6 and 7 show speed, direction, and cumulative speed distribution histograms. Basic statistics are given in Tables 2 and 3. Speeds when the rotor is stalled are recorded as approximately 2 cm/s, so all speeds between 0.-2. cm/s are tabulated in Figures 6 and 7 and Tables 2 and 3 as occurring in the 2.-2.5 cm/s range. Only meter 289 provided a reliable estimate of average speed since meter 300 tended to stall at low speeds. Average scalar speed for meter 289 was 4.4 cm/s and vector mean speed was 2.1 cm/s in a direction of 012°T . Maximum speed for meters 289 and 300 were 8.9 and 7.9 cm/s, respectively. The prevalence of low speeds on either side of around 220°T and the relative frequency of high speeds around 0° in Figures 6 and 7 reflect the presence of the roughly northward mean flow. Progressive vector diagrams in Figures 8 and 9 further confirm the conclusion that the mean flow was northward with direction reversal on an approximately daily basis.

IV-D. Near-Bottom Current Spectra

The u-v (east-north) and clockwise-counterclockwise velocity spectra are presented in Figures 10 to 15. Annotations indicate the periods of a number of conspicuous peaks.

In spite of the short 3.3 day record length, peaks near diurnal and semi-diurnal periods are quite distinct. The inertial period of 31 hours is rather close to the K_1 tidal period (23.93 hours), but the near-diurnal peak is probably due largely to inertial currents, for two reasons. First, near the diurnal peak the clockwise rotary spectral components are much larger than the counterclockwise. Second, the u and v spectra at that frequency are of nearly equal magnitude. While these criteria are not sufficient to unequivocally identify inertial oscillations, they are necessary characteristics that northern hemisphere inertial oscillations must possess. If the motions are indeed

primarily inertial oscillations, they may be episodic, their occurrence in a given record depending upon the presence of a forcing phenomenon. On the other hand, the K_1 tidal component at 23.93 hours may regularly excite the inertial oscillations at 31 hours, the amplitude of the oscillations depending on the amplitude of the K_1 tide. Under these conditions the near-diurnal oscillations would be permanent features of the current structure.

A second prominent spectral peak occurs near the semidiurnal tidal period of 12.42 hours and is probably the M_2 tide. Tidal signals in the open ocean are frequently not this energetic relative to the rest of the spectrum, and this peak may reflect the influence of the nearby topography as well as the absence of other forcing phenomena. The other spectral peaks are much smaller in amplitude and any connection with other obvious or important physical processes is not apparent.

Temperature spectra were calculated but are not presented because they confirmed what is apparent in Figures 4 and 5: there is virtually no variation in temperature about the mean of 2.4°C , and in particular there is no evidence of any diurnal or semidiurnal periodicity.

V. Summary and Conclusions

Real-time current profiles were taken near DSDP Hole 395A on 26-27 March 1981 from the USNS LYNCH with an NBIS direct reading current meter. The profiling was done during the initial deployment of the Marine Seismic System Project's borehole seismometer from the R/V GLOMAR CHALLENGER. Readings indicated a variable but generally slow current regime. Sea state conditions 0 or 1 prevailed during the profiling. Nevertheless, significant contamination of the records by ship motion was apparent, and deployment from the CHALLENGER would have been preferable. Unless techniques are applied to decouple the profiler from the ship's motion, it appears inadvisable to deploy the DRCM from a platform

as unstable as an AGOR above sea state 1 or 2. For higher sea state, satisfactory results could be expected only when the current regime is sufficiently high that ship motion induced noise does not mask the background current measurements, although the accuracy of the measurements would still be reduced. In spite of the ship motion contamination, however, observed current speeds in the upper 1000 m were generally low and posed minimal threat of cable entanglement.

Sea Link vector averaging current meters deployed near the bottom in 4483 m of water for 3-1/2 days in March - April 1981 in support of the MSS Project performed well under conditions of very low current speeds. Average (scalar) speed was 4.4 cm/sec and maximum speed was under 9 cm/sec. The mean direction of flow was slightly east of north, with a steady clockwise rotating component of period somewhat greater than one day superimposed on the mean flow. The rotating component can be attributed to inertial oscillations which may be forced by the diurnal tide. The semidiurnal tide was also apparent and at a sufficiently energetic level that topographic forcing may be implicated. Temperature was constant at 2.4°C.

The observed currents were of sufficient magnitude potentially to excite instrument "strumming" due to vortex shedding at frequencies within the sensitive range of the concurrently deployed ocean bottom seismometers (.01 - 30 Hz: see Table 4). Figure 16 shows estimated vortex shedding frequencies for four sizes of cylinders for currents in the range of the current meter observations. The complicated geometries of the OBS's make it difficult to isolate any particular components that might be likely to contribute strumming noise except perhaps for the radio beacon antennas. Assuming an antenna rod thickness of 1/8", the strumming frequency would be 6 Hz at 9 cm/s and 3 Hz at 4.4 cm/s. If this corresponded to a resonant frequency of the rod or of the attached flag,

strumming amplitude could be substantial. Duennebier, et al. (1981) did report noise signals in OBS recordings that could be attributed to vortex shedding from various antenna configurations.

As reported by Duennebier, et al. (1981), Kasahara et al. (in press) found 10 cm/s to be a threshold for noise contamination by vortex shedding. Maximum currents in this study were 9 cm/s, suggesting contamination of these OBS records is likely to be small and intermittent. But Figures 2 and 3 illustrate the fact that deep water, near bottom current regimes are characterized by considerable variability in speed and direction. Internal tides, inertial oscillations, and other phenomena make it a mistake to assume that the operating environment of a deep water OBS will be characterized by steady, slow currents. The variable and possibly episodic nature of these current features can make it difficult to detect and remove noise contamination. The development of methods of evaluating noise contamination to the seismometer records is recommended, as well as the testing of OBS's for sensitivity to current generated noise and their redesign to eliminate as much as possible.

One approach to evaluating noise contributions from vortex shedding would be to compute for each external OBS component a time series of shedding frequency from the observed current time series. Coherence between OBS signal level and the shedding frequency time series could give an indication of the current's influence. Such a technique could also be applied to the borehole seismometer and related hardware if it were felt that the instrument might be influenced by vortex shedding off components on the bottom.

The better approach, particularly in view of the complicated geometry of OBS systems and difficulty and expense of making current measurements, is noise sensitivity evaluation and instrument redesign. To evaluate the response at different fluid speeds the instrument could be placed in a tank or wind tunnel,

and the equipment either moved through the fluid or the fluid moved past it and the pure noise signal recorded. A very important point is that the fluid could be air rather than water if proper Reynolds' scaling were observed.

This study as well as others show there is potential for OBS observational data to be contaminated by hydrodynamically generated noise. Up to now investigation of the importance of the problem has been neglected, but methods of evaluating the magnitude of the problem for various OBS designs and of solving it, should it prove significant, should be addressed in the future.

REFERENCES

- AMF. 1976. Vector Averaging Current Meter, Model 601C. AMF Electrical Products Development Division of AMF Incorporated, Herndon, VA.
- Batchelor, G.K. 1967. An Introduction to Fluid Dynamics. Cambridge University Press, Cambridge, England. 615 p.
- Duennebier, F.K., G. Blackinton, and G.H. Sutton. 1981. Current-generated noise recorded on ocean bottom seismometers. Marine Geophysical Researches, 5(1), 109-115.
- Fleischer, P. 1980. Weather & currents in the vicinity of 23°N, 46°W, North Atlantic Ocean. NORDA Tech. Note 74, NORDA, NSTL Station, MS 39529. 18 p.
- Gerrard, J.H. 1978. The wakes of cylindrical bluff bodies at low Reynolds number. Philosophical Transactions of the Royal Society of London, A. 288:1354, 351-382.
- Hussong, D.M., P.B. Fryer, J.D. Tuthill, and L.K. Wipperman. 1979. The geological and geophysical setting near DSDP site 395, North Atlantic Ocean. In: Melson, W.G., P.D. Rabinowitz, et al. Initial Reports of the Deep Sea Drilling Project, v.45, U.S. Government Printing Office, Washington, D.C., p. 23-37.
- Kasahara, J., S. Nagumo, S. Koresawa, and T. Daikubara. (In Press). Experimental results of vortex generation around ocean-bottom seismograph due to bottom currents. Bull. Earthquake Res. Inst.
- McCullough, J.R. 1975. Vector Averaging Current Meter Speed Calibration and Recording Procedure. Woods Hole Oceanographic Institution Tech. Rept. WHOI-75-44, 35 p.
- NAVOCEANO. 1966. Handbook of Oceanographic Tables. U.S. Naval Oceanographic Office, Washington, DC.

- Sutton, G.H., B.T.R. Lewis, J. Ewing, F.K. Duennebie, B. Iwatake, J.D. Tuthill.
1981. An overview and general results of the Lopez Island OBS experiment.
Marine Geophysical Researches, 5(1),3-34.
- Wilcox, J.D. 1978. A survey of current speed measurements in the deep ocean.
NUSC Tech. Mem. 781176, Naval Underwater Systems Center, Newport, R.I. and
New London, CT.
- Woodward, W.E. and G.F. Appell. 1973. Report on the Evaluation of a Vector
Averaging Current Meter. NOAA Tech. Memo. NOAA-TM-NOS-NOIC-1., 64 p.

Table 1. Details of MSS Current Meter Moorings Near
DSDP Hole 395A (22°45.35'N, 46°04.90'W)

Cruise Number: USNS LYNCH 070581

		<u>Mooring</u>	
		000901	001001
Position:	Latitude	22°46.35'N	22°46.10'N
	Longitude	46°04.59'W	46°05.49'W
Dates: ¹	From	1526Z 28 March 1981	1814Z 28 March 1981
	To	0837Z 01 April 1981	0837Z 01 April 1981
Water Depth (m)		4483	4483
Meter Depth (m)		4478	4478
Sampling Rate (sec)		56	56
Meter number		289	300
Performance		Very good	Satisfactory

¹Dates are conservatively estimated times moorings were in position.

[illegible]

CRUISE: 070581
METER: 300
DEPTH: 4478

MOORING: 001001

START: 18142 28 MAR 1981
END: 08372 01 APR 1981

LATITUDE:
LONGITUDE:

22.46.102
-86. 5.493

0-10	168	3	5	9	35	35	13	5	2	8	283	5.1
10-20	244	7	32	49	27						359	6.5
20-30	129	7	33	65	15						253	4.6
30-40	31	3	42	49	32	19	2				158	2.9
40-50	47	3	19	8	6		7	6	2		98	1.8
50-60	11	6	27	30	1	6	4	5			90	1.6
60-70	49	9	24		14	6	2				104	1.9
70-80	24	2	13	15	7	5	5	2			73	1.3
80-90	26	3	26	31	6	13	27	7			139	2.5
90-100	31	15	25	22	15	6					114	2.1
100-110	55	3	24	10	3						95	1.7
110-120	12	1	7	13	10	1					44	.8
120-130	76	15	15	5	5						116	2.1
130-140	155	11	23	23	14	1	1				227	4.1
140-150	60	2	14	7	2	6					92	1.7
150-160	160	2	24	32	10						228	4.1
160-170	105	5	33	35	12						190	3.4
170-180	97	12	43	33							185	3.3
180-190	66	12	28	5							111	2.0
190-200	21	9	17								47	.9
200-210	14	8	6	2							30	.5
210-220	21	5	5	8							39	.7
220-230	48	4	2	10							64	1.2
230-240	65	1	5	22	3						96	1.7
240-250	86	1	12	24	1						123	2.2
250-260	91	2	4	8	1						106	1.9
260-270	51	5	5	20	6						82	1.5
270-280	137	11	8	40	14						210	3.8
280-290	173	7	20	47	5						262	4.7
290-300	176	41	21	12	2						262	4.7
300-310	94	20	4	5							123	2.2
310-320	73	2	8		11	4	2				100	1.8
320-330	40	2	13	45	63	55	1				219	4.0
330-340	16	4	34	104	40	2	2				202	3.7
340-350	81	3	17	16	31	22	12	20			234	4.2
350-360	135	11	4	16	33	21	38	19	3	14	371	6.7
										9	22	1
										2	51	26

Table 3. Meter 300 basic current statistics.

Table 4. Diameters of Cylindrical Bodies that would Oscillate at the Extrema of the OBS Frequency Range under Mean and Maximum Current Conditions Observed

Frequency	Mean Speed= 4.4 cm/sec	Max. Speed= 9 cm/sec
.01 Hz	.011 cm	.0056 cm
30 Hz	34.1 cm	16.67 cm

Applicable formula:

$$d = \frac{f_s}{.2 \cdot U}$$

where:

d = object diameter
 f_s = frequency
 U = current speed


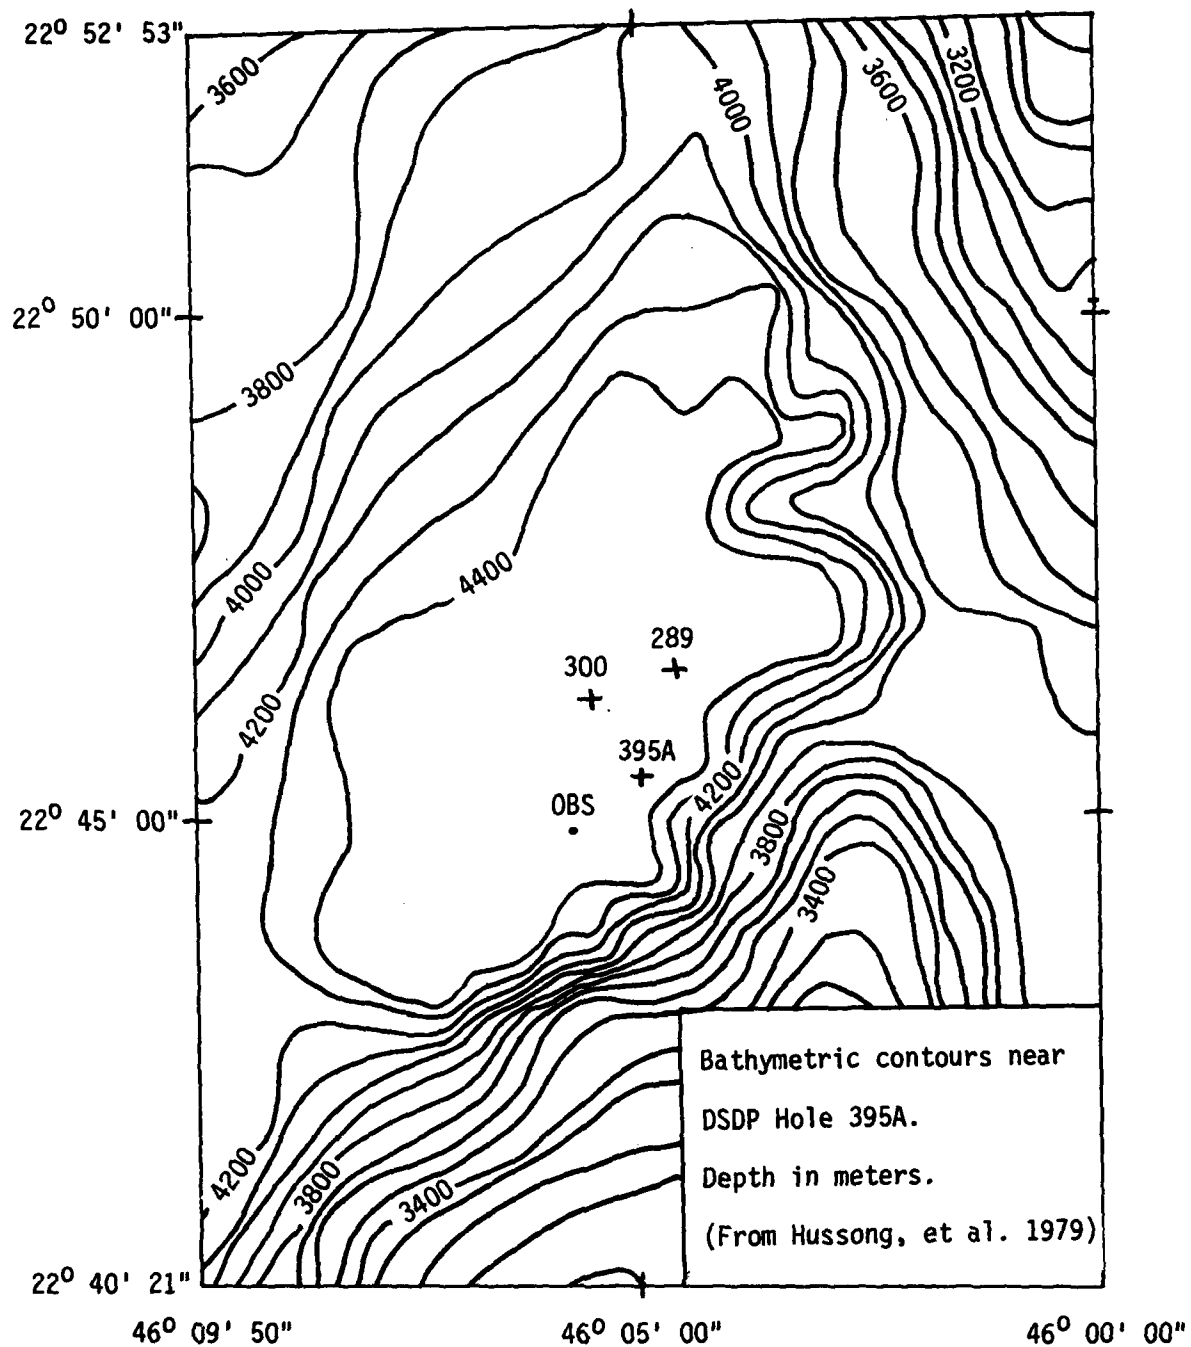



Figure 1. Locations of current meters 289 and 300, of Hole 395A, and of the operational OBS during March-April 1981 MSS at-sea test.

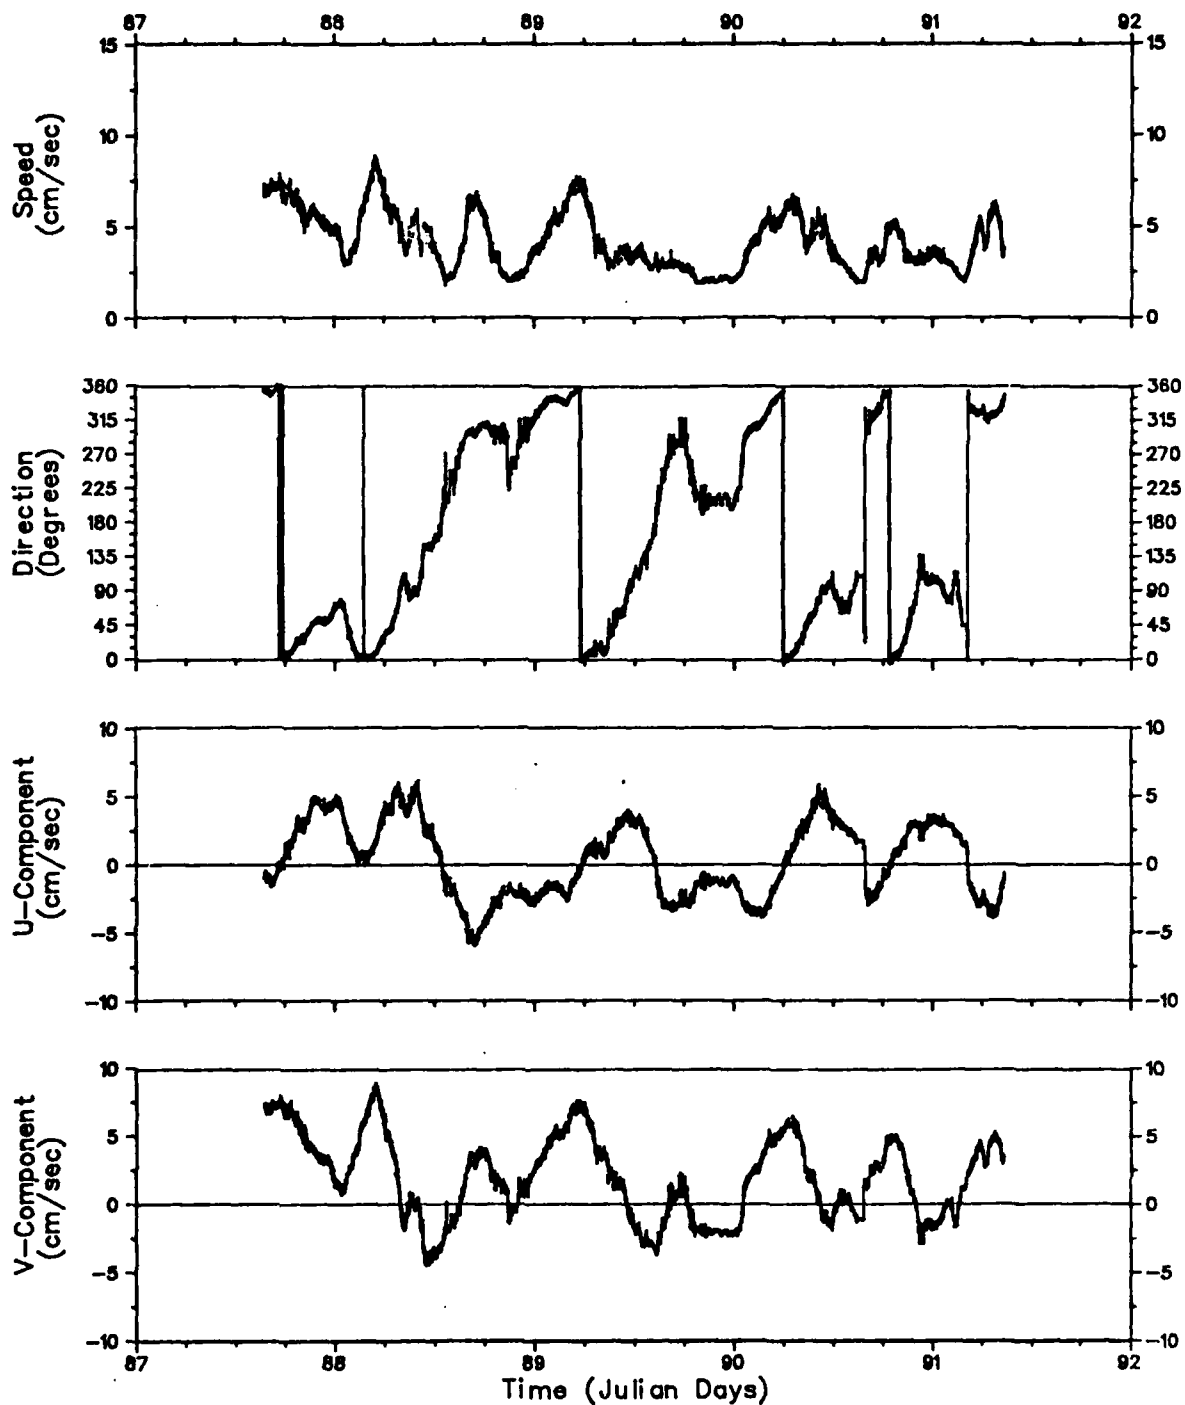

Cruise: 070581
 Meter : 289
 Latitude : 22.46.35
 Longitude : -46. 4.58

Mooring: 000901
 Depth : 4478
 Start : 1526Z 28 MAR 1981
 End : 0837Z 01 APR 1981


Figure 2. Meter 289 current time series

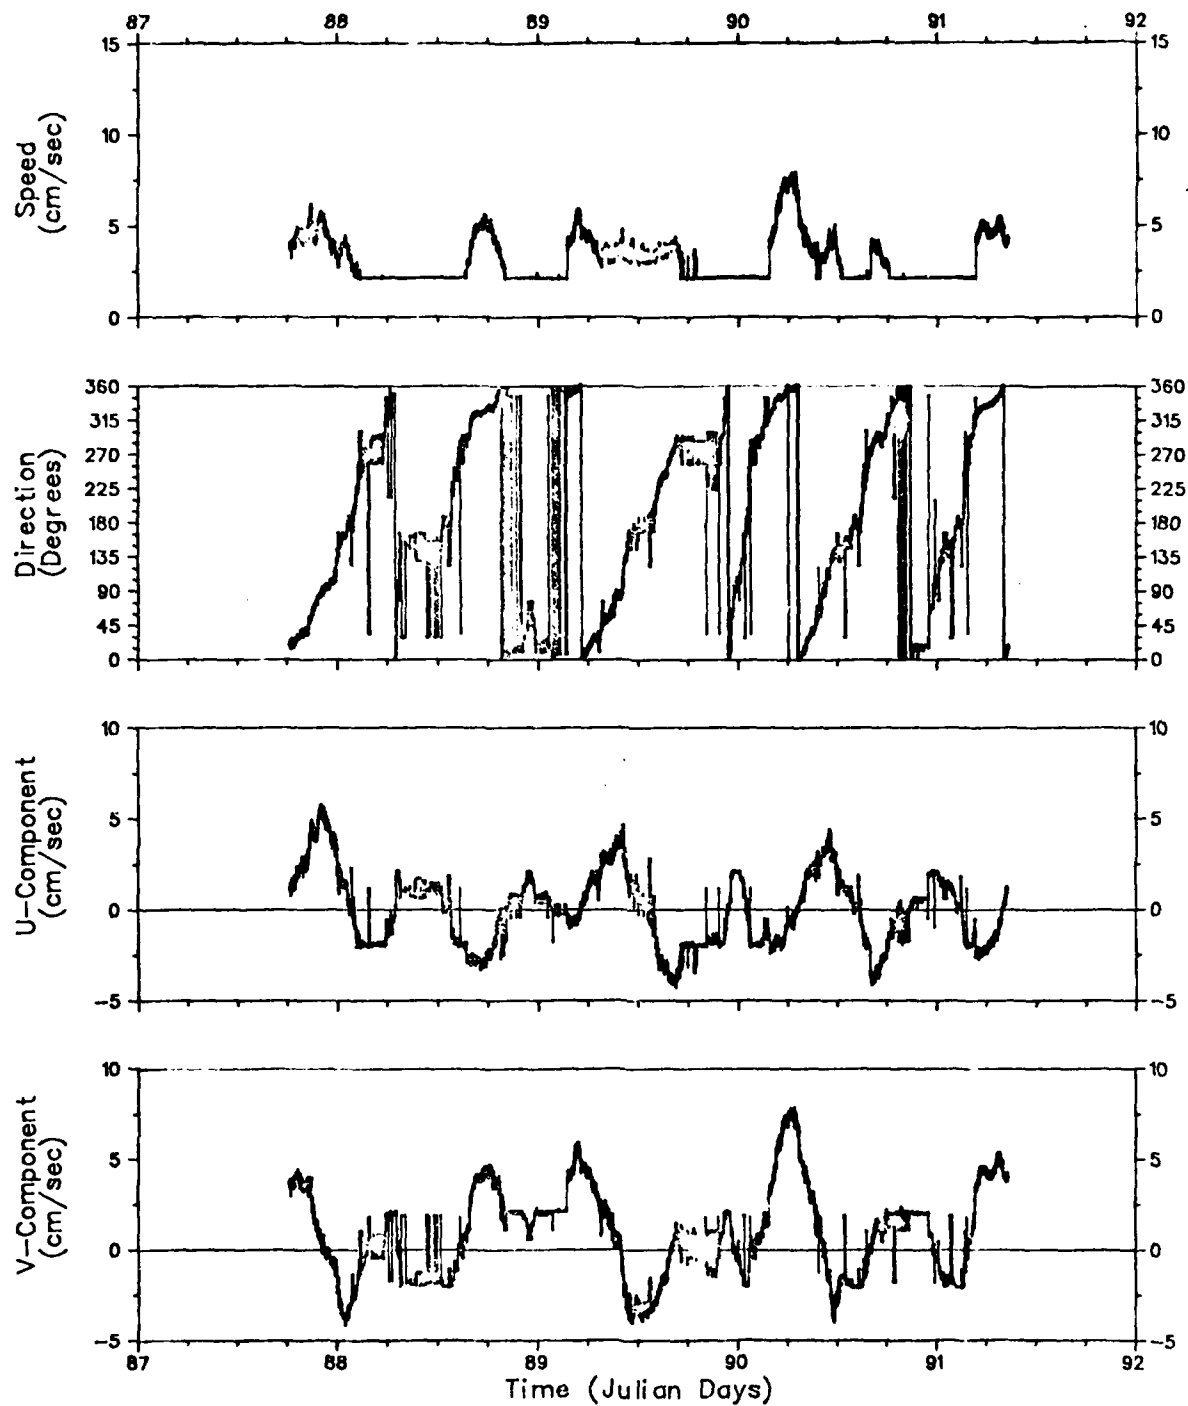

Cruise: 070581
 Meter : 300
 Latitude : 22.46.10
 Longitude : -46. 5.49

Mooring: 001001
 Depth : 4478
 Start : 1814Z 28 MAR 1981
 End : 0837Z 01 APR 1981


Figure 3. Meter 300 current time series

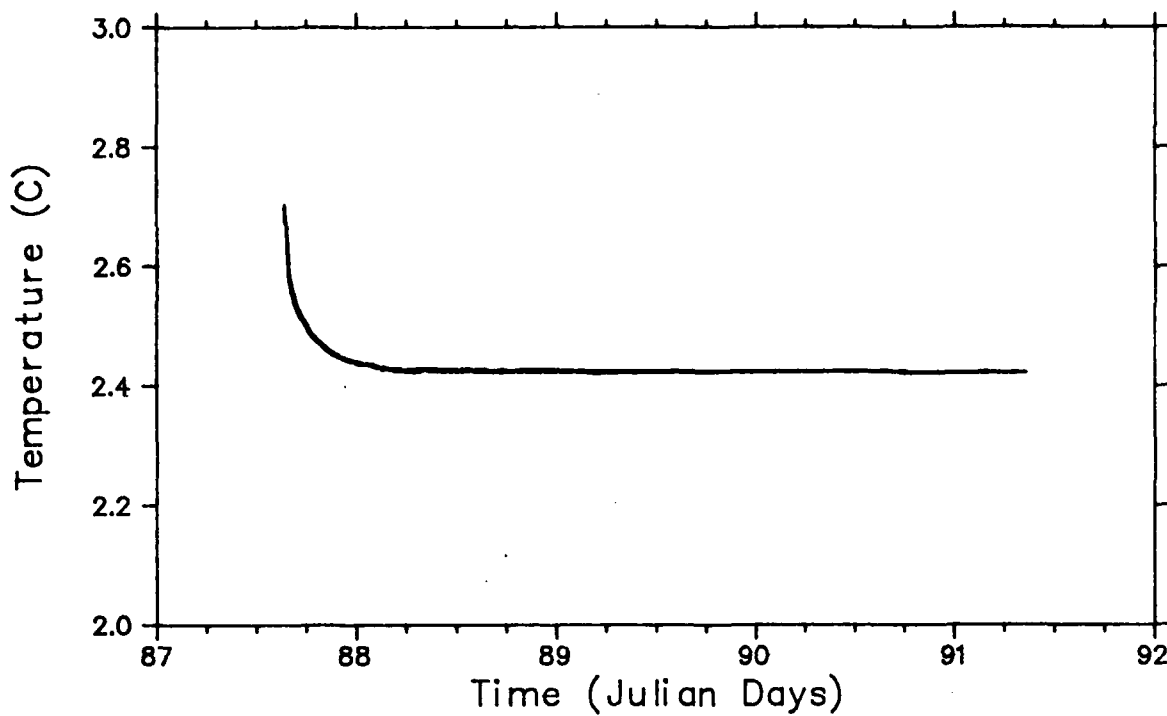

Cruise: 070581
Meter : 289
Latitude : 22.46.35
Longitude : -46. 4.58

Mooring: 000901
Depth : 4478
Start : 1526Z 28 MAR 1981
End : 0837Z 01 APR 1981


Figure 4. Meter 289 temperature time series

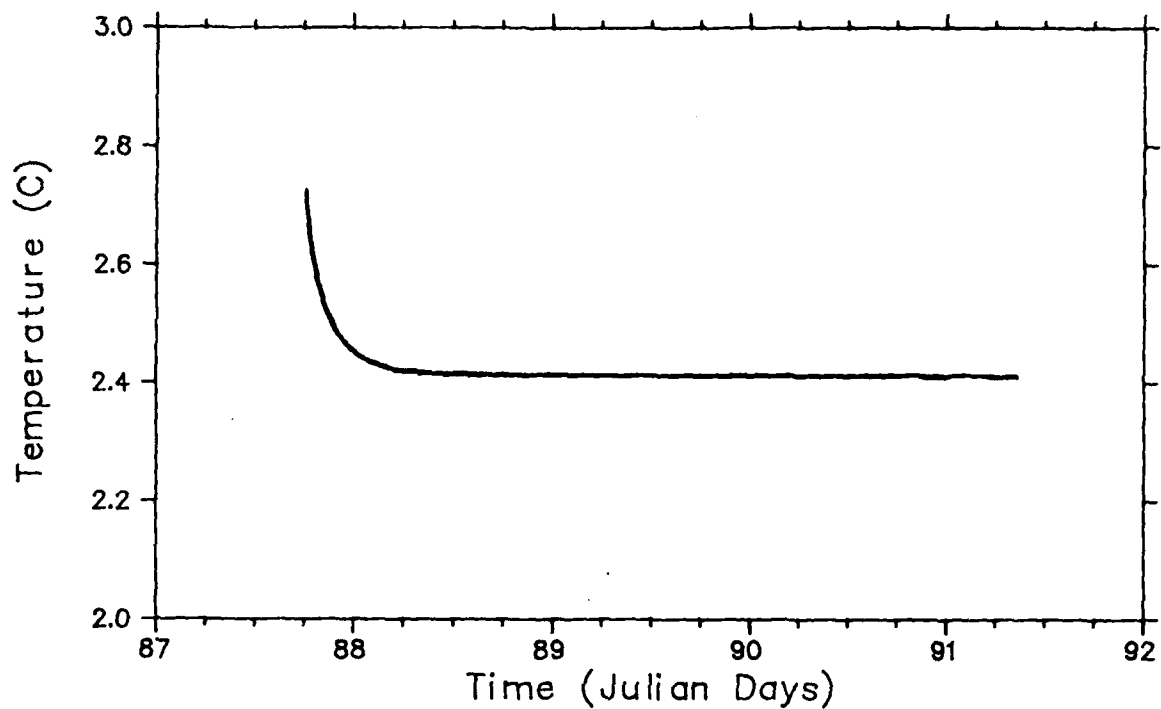

Cruise: 070581
Meter : 300
Latitude : 22.46.10
Longitude : -46. 5.49

Mooring: 001001
Depth : 4478
Start : 1814Z 28 MAR 1981
End : 0838Z 01 APR 1981


Figure 5. Meter 300 temperature time series

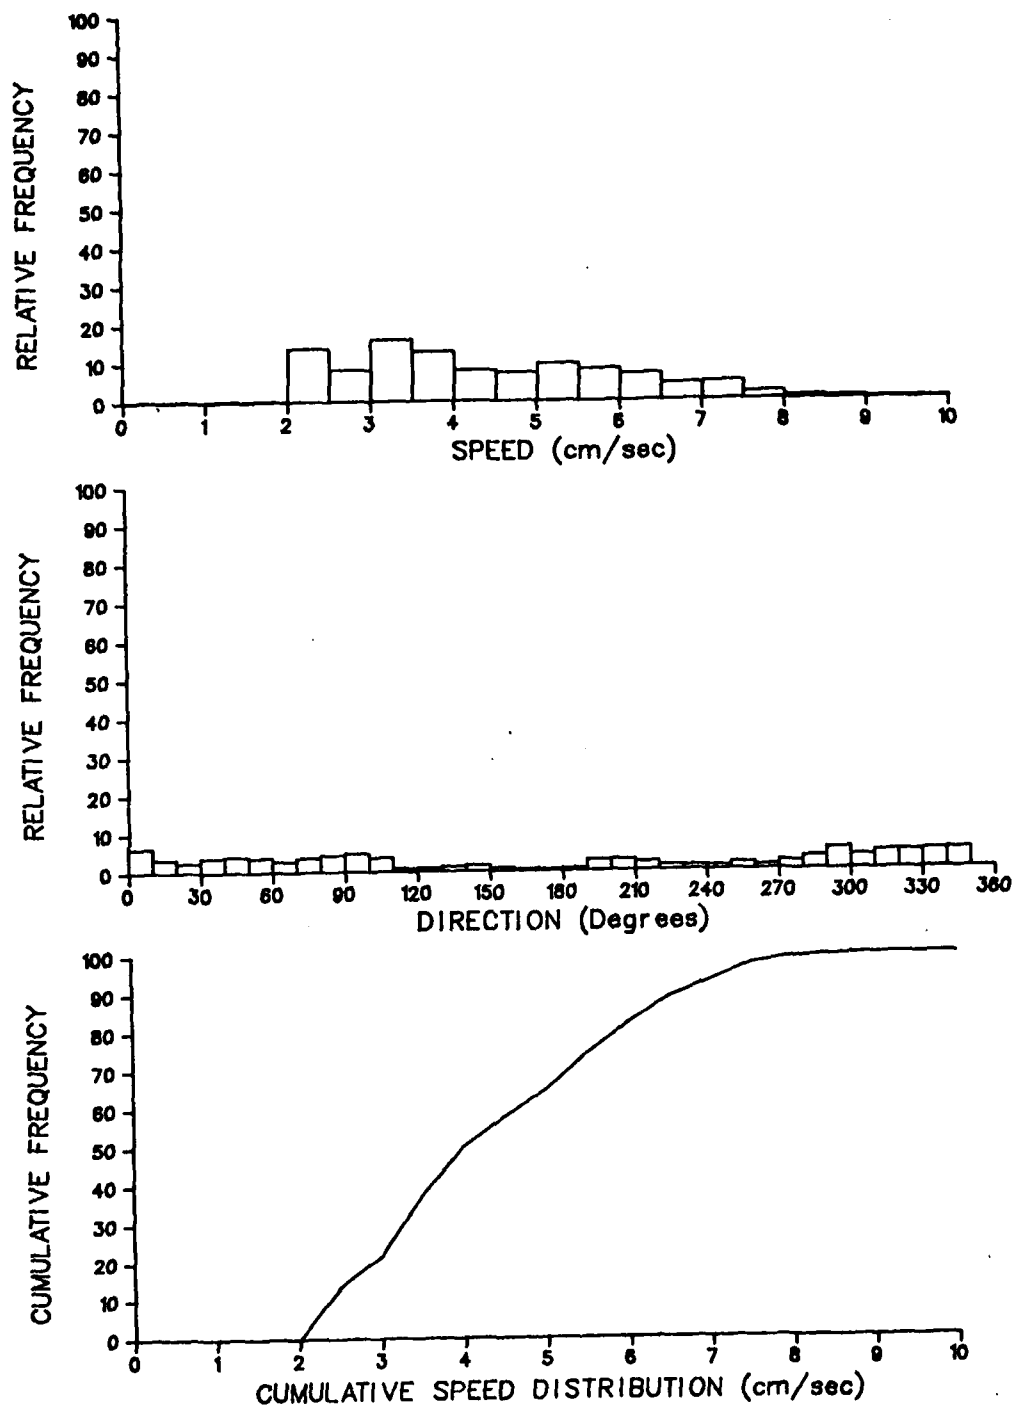

Cruise: 070581
 Meter : 289
 Latitude : 22.46.35
 Longitude : -46. 4.58

Mooring: 000901
 Depth : 4478
 Start : 1526Z 28 MAR 1981
 End : 0837Z 01 APR 1981


Figure 6. Meter 289 current speed and direction histograms

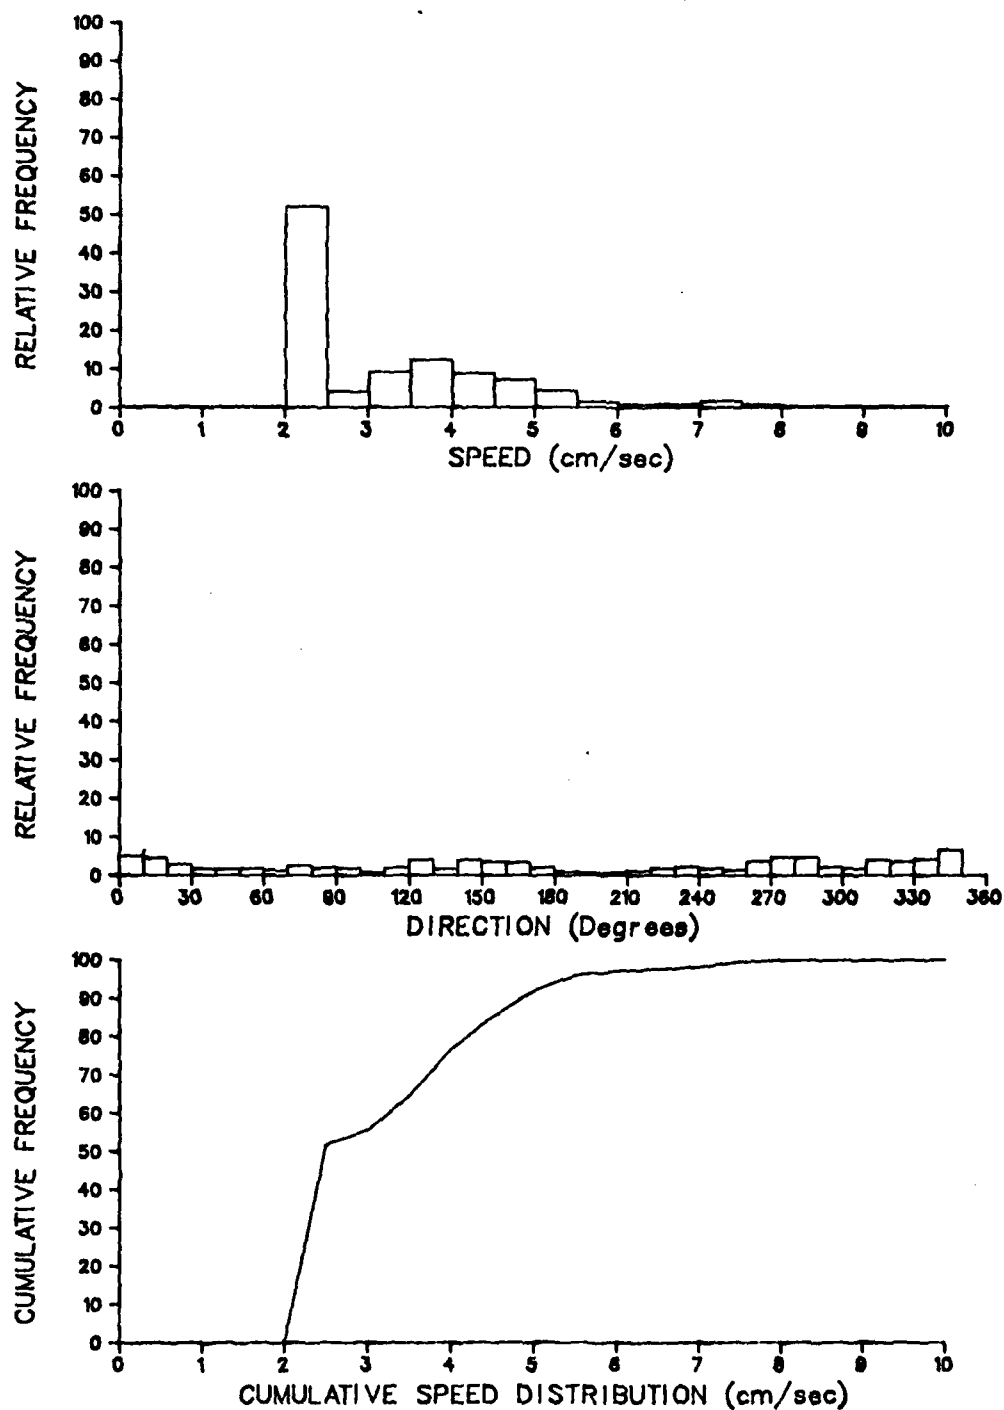

Cruise: 070581
 Meter : 300
 Latitude : 22.46.10
 Longitude : -46. 5.49

Mooring: 001001
 Depth : 4478
 Start : 1814Z 28 MAR 1981
 End : 0837Z 01 APR 1981

Figure 7. Meter 300 current speed and direction histograms

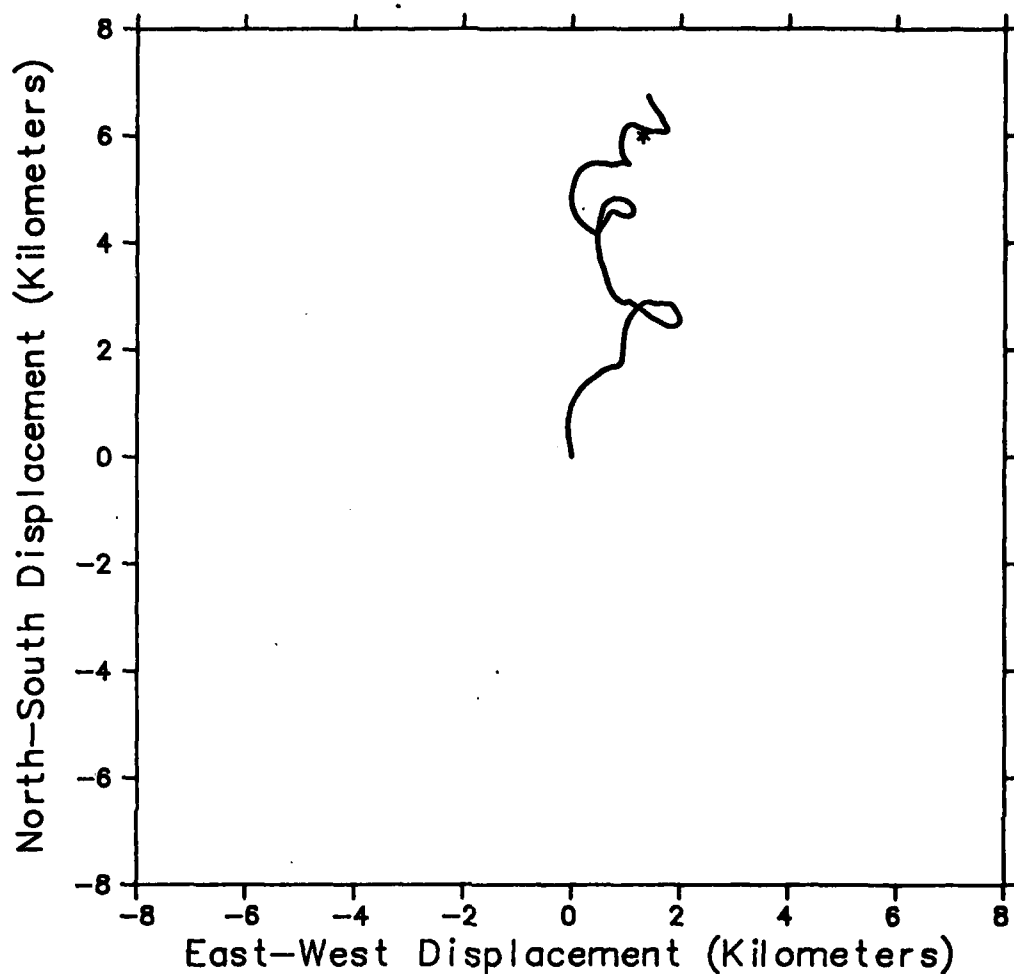


* Every 4.00 Days Starting At 0000 Julian Day 87

Cruise: 070581
 Meter : 289
 Latitude : 22.46.35
 Longitude : -46. 4.58

Mooring: 000901
 Depth : 4478
 Start : 1526Z 28 MAR 1981
 End : 0837Z 01 APR 1981

Figure 8. Meter 289 progressive vector diagram

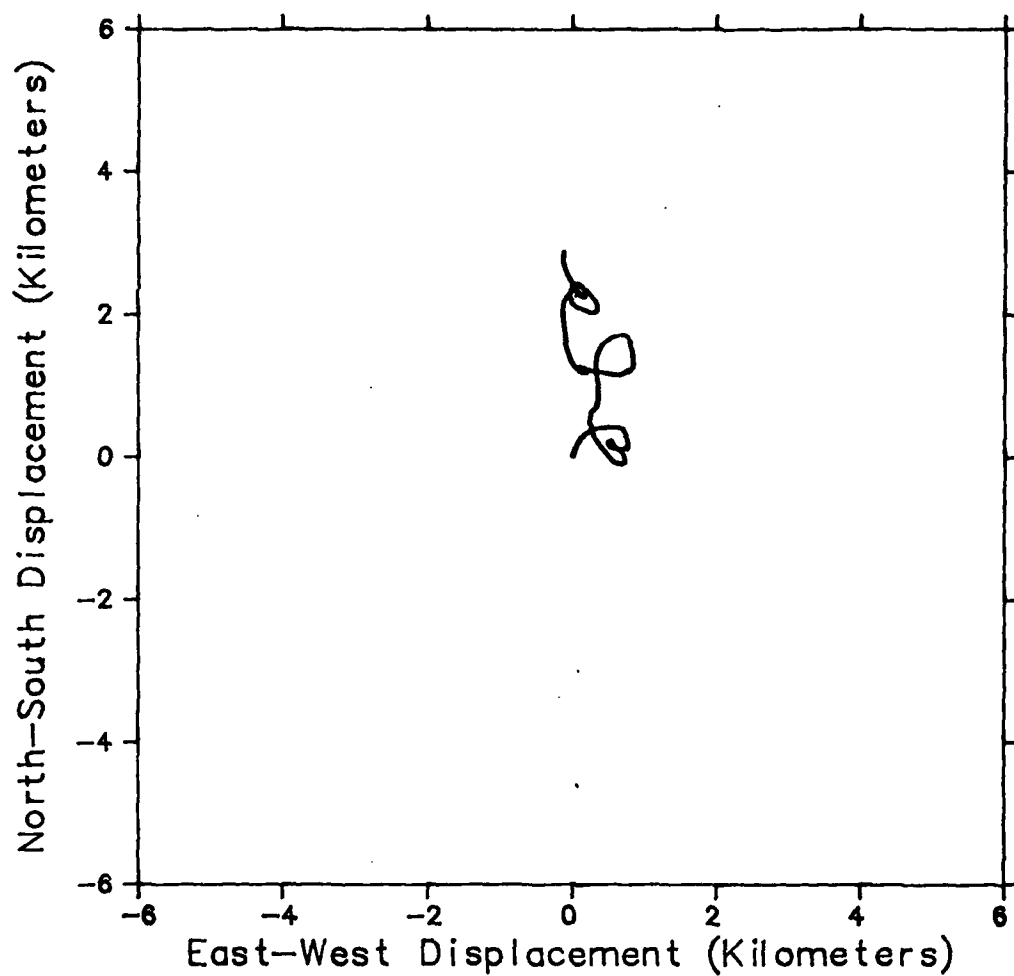


* Every 4.00 Days Starting At 0000 Julian Day 87

Cruise: 070581
Meter : 300
Latitude : 22.46.10
Longitude : -46. 5.49

Mooring: 001001
Depth : 4478
Start : 1814Z 28 MAR 1981
End : 0837Z 01 APR 1981


Figure 9. Meter 300 progressive vector diagram

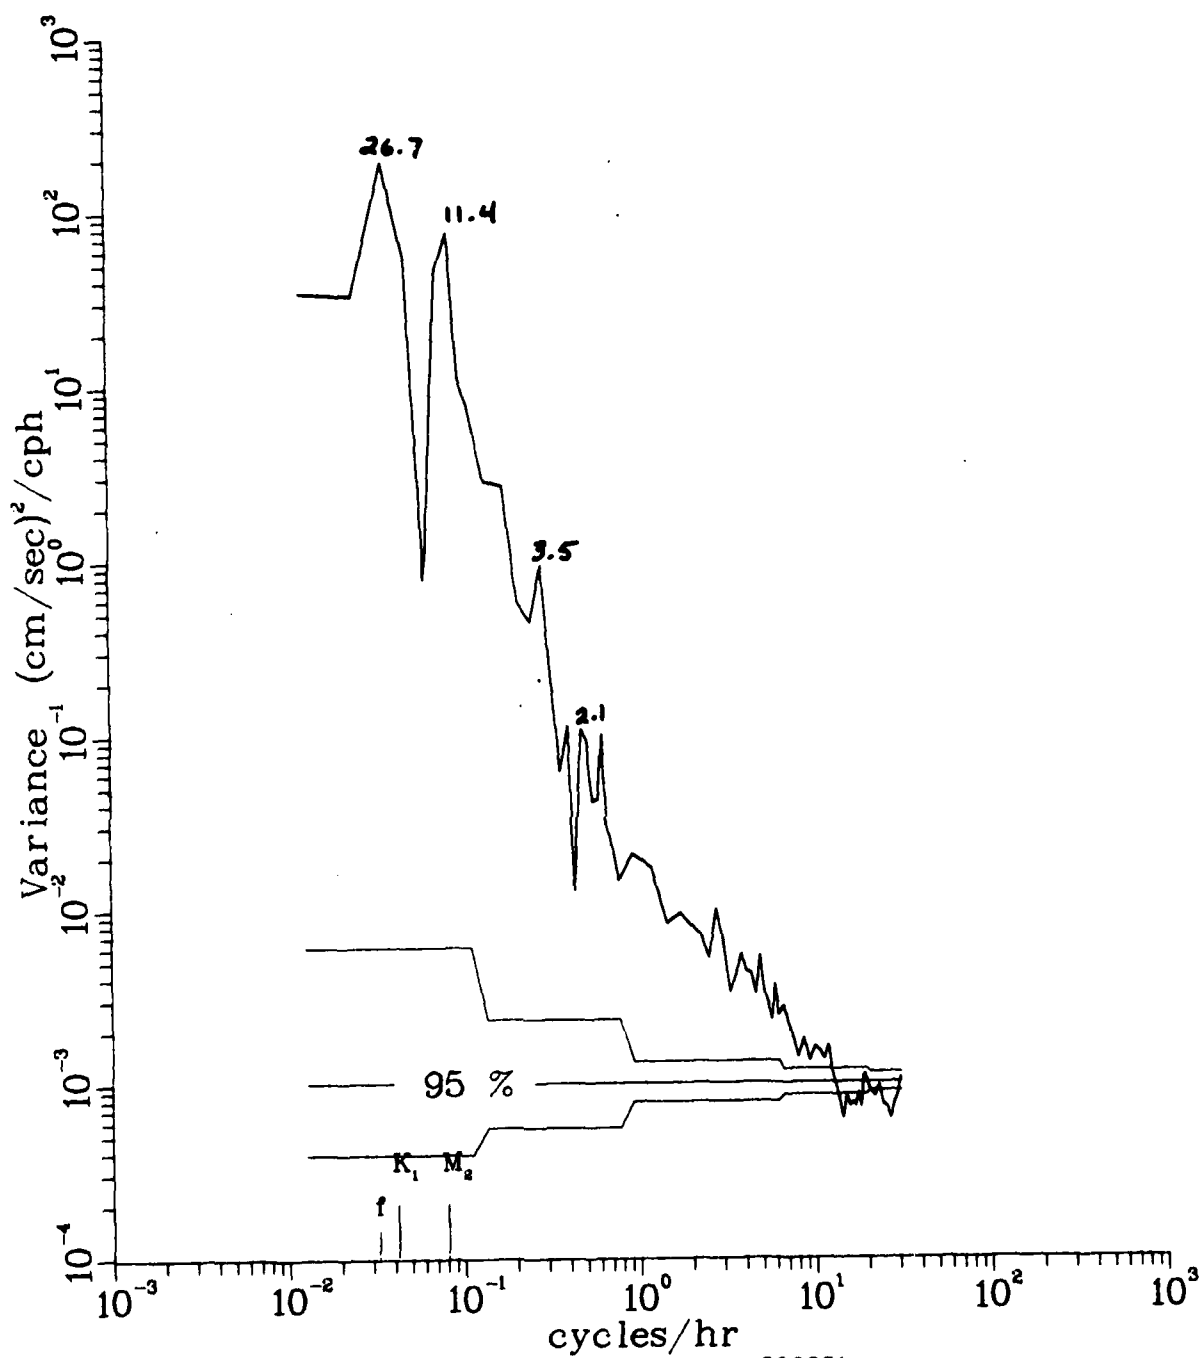

Variable . U
 File . 070581
 Meter . 289
 Lat. . 22.46.350
 Long. . -46. 4.589

Array . 000901
 Depth . 4478
 Start . 28 MAR 1900
 End . 31 MAR 1900


Figure 10. Meter 289 u(east) spectrum

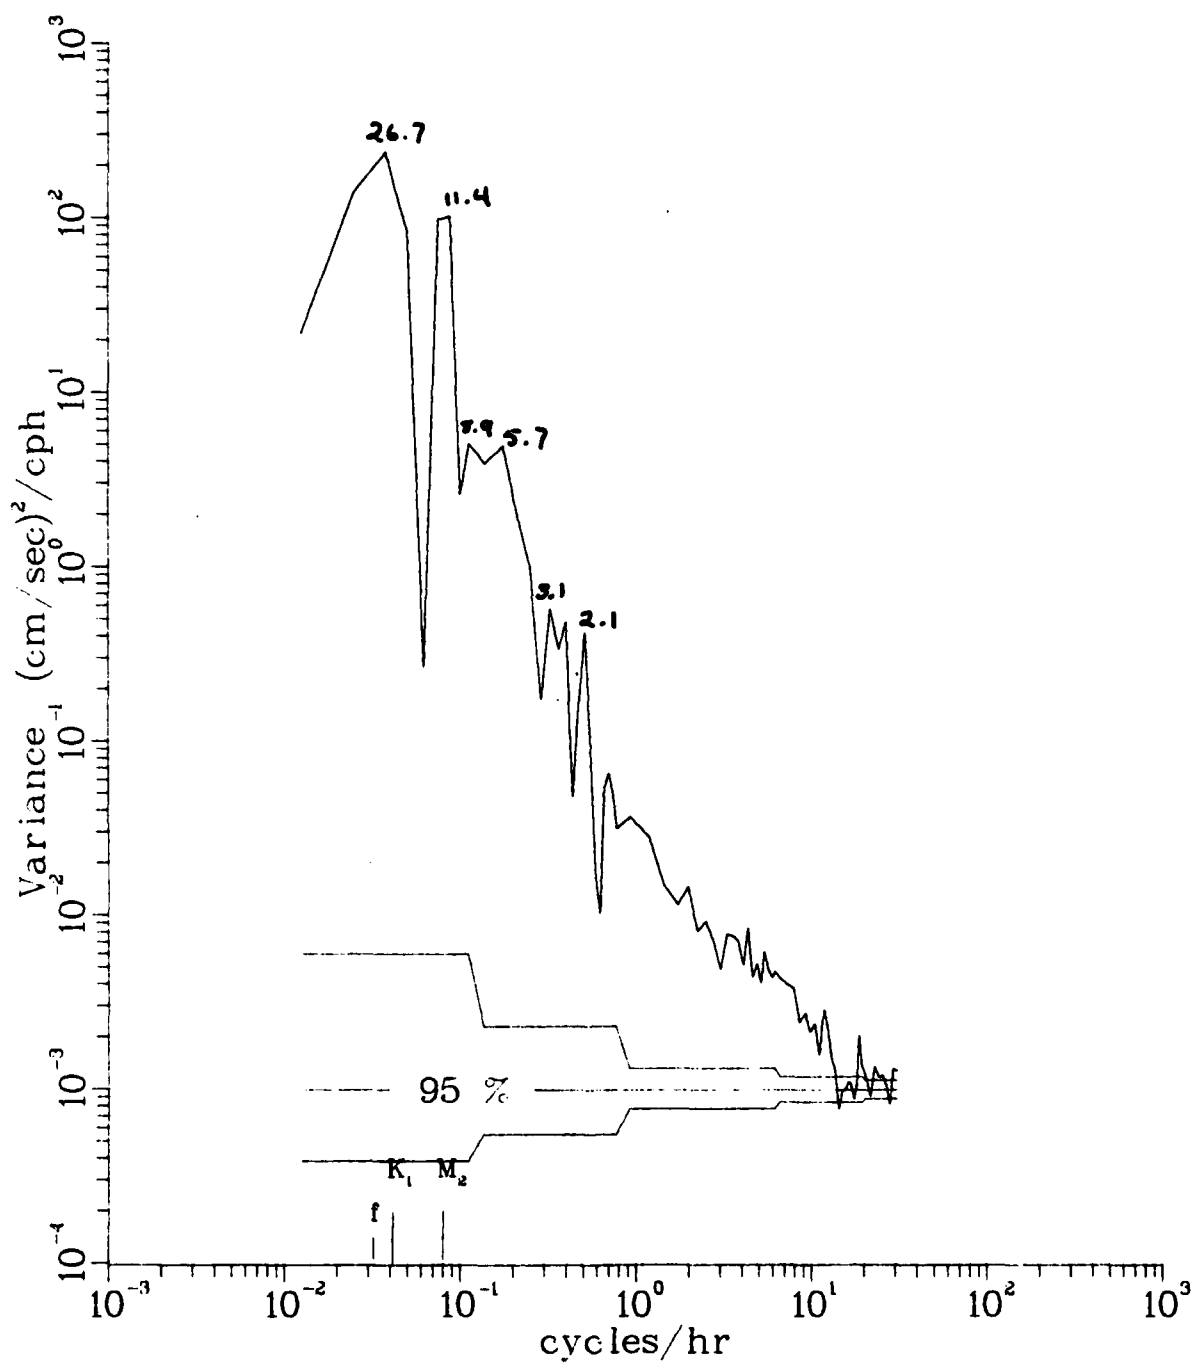

Variable . V
 File . 070581
 Meter . 289
 Lat. . 22.46.350
 Long . -46. 4.589

Array . 000901
 Depth . 4478
 Start . 28 MAR 1900
 End . 31 MAR 1900


Figure 11. Meter 289 v(north) spectrum

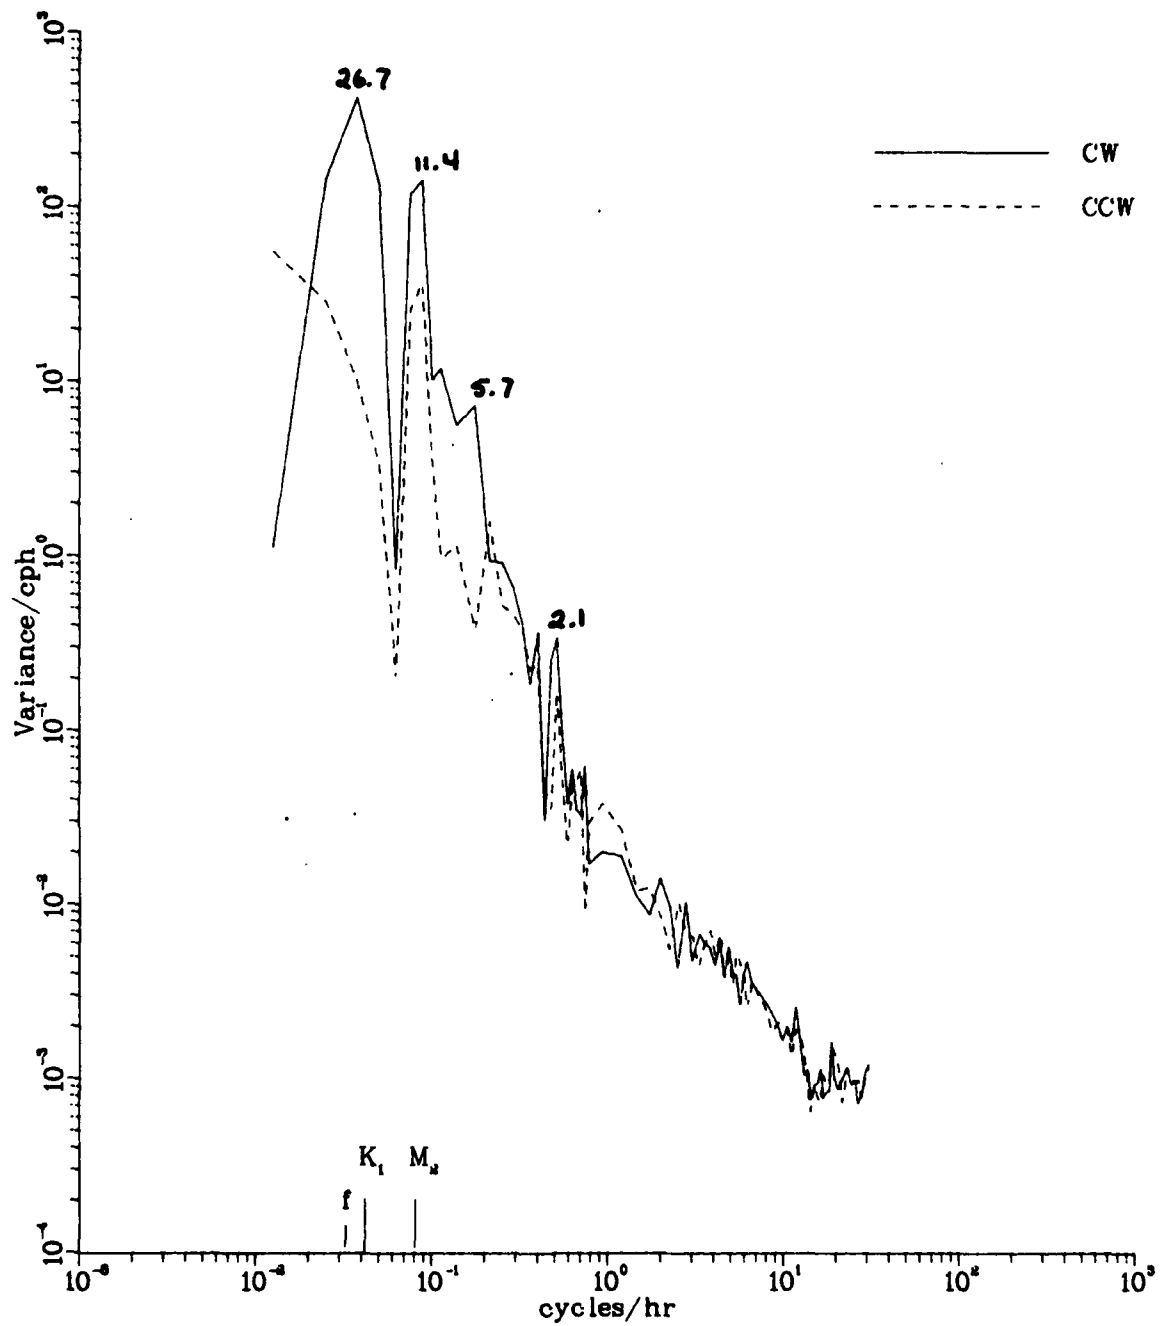

Variable : U
 Depth . 4478
 Meter . 289
 Lat. 22.46.350
 Long. -46. 4.589

Variable : V
 Depth . 4478
 Meter . 289
 Lat. 22.46.350
 Long. -46. 4.589


Figure 12. Meter 289 rotary spectra

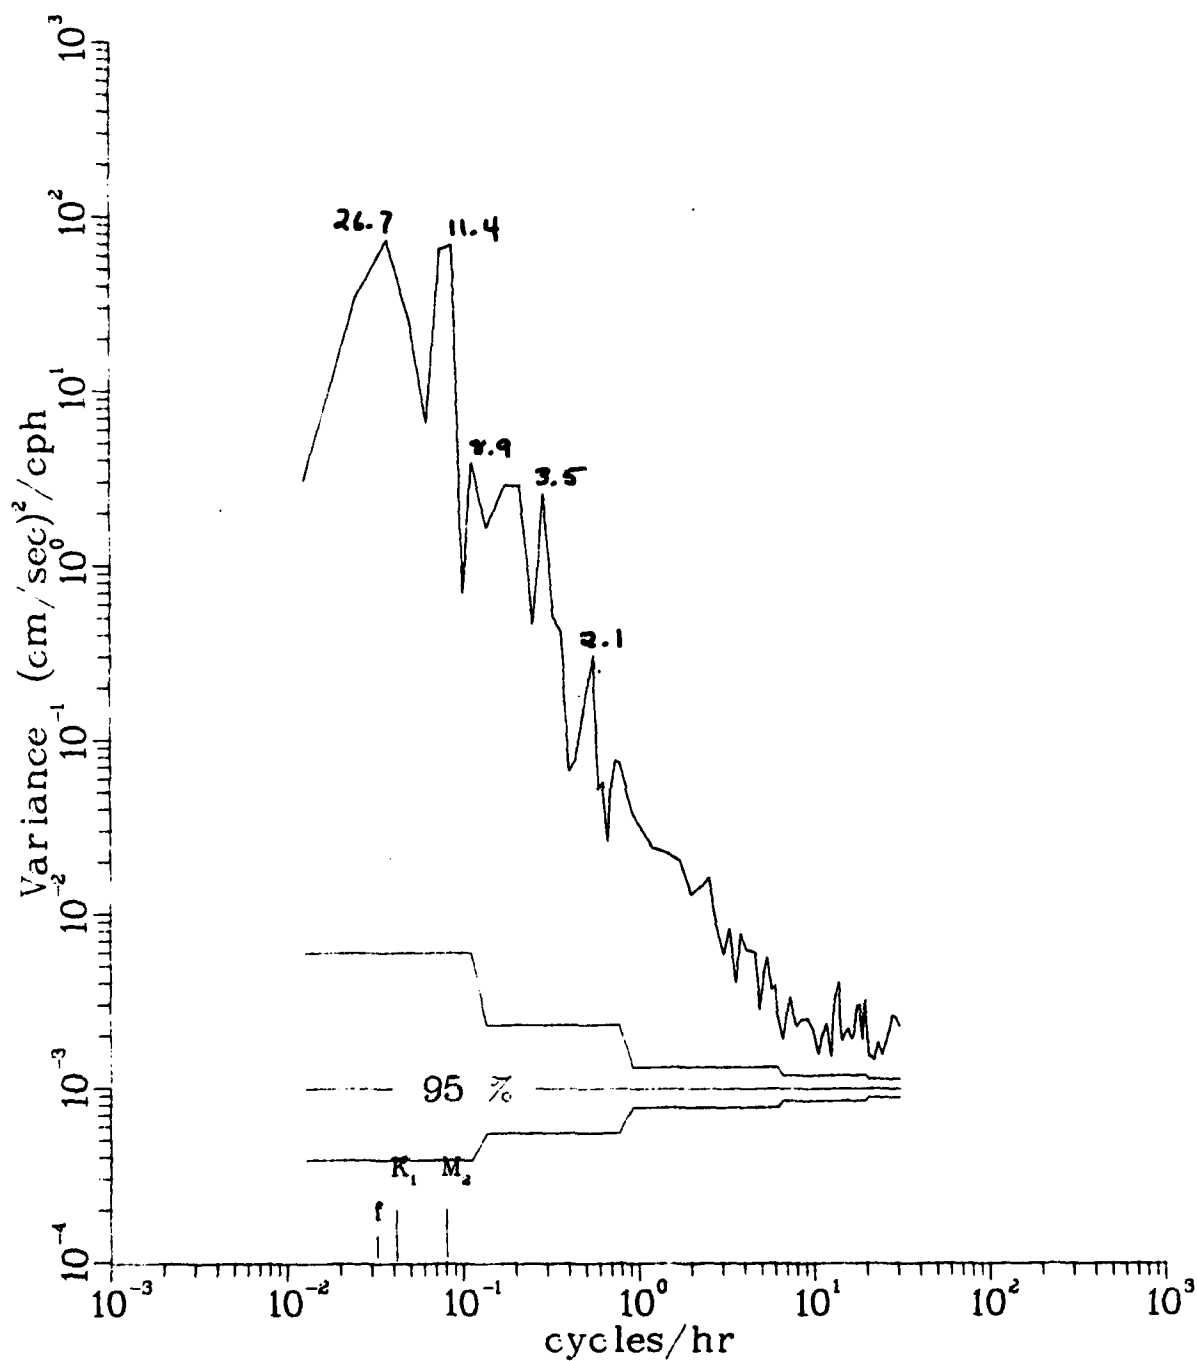

Variable : U
 File : 070581
 Meter : 300
 Lat. : 22.46.102
 Long. : -46. 5.493

Array : 001001
 Depth : 4478
 Start : 28 MAR 1900
 End : 31 MAR 1900


Figure 13. Meter 300 u(east) spectrum

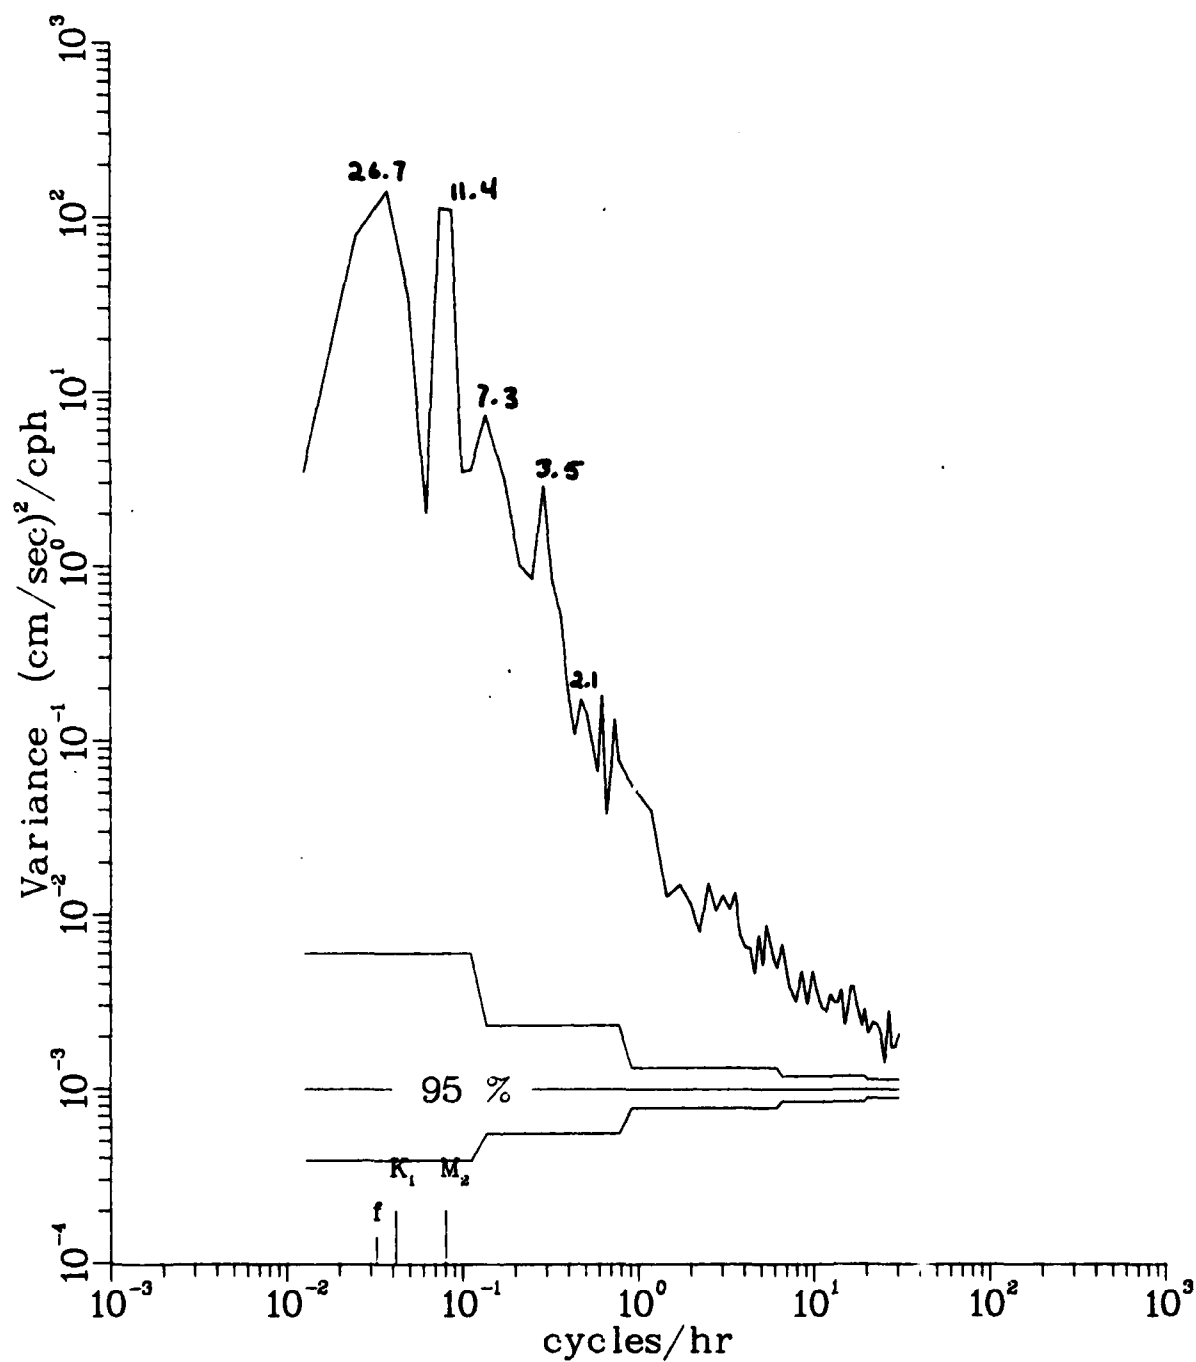

Variable : V
 File : 070581
 Meter : 300
 Lat. : 22.46.102
 Long. : -46. 5.493

Array : 001001
 Depth : 4478
 Start : 28 MAR 1900
 End : 31 MAR 1900

Figure 14. Meter 300 v(north) spectrum

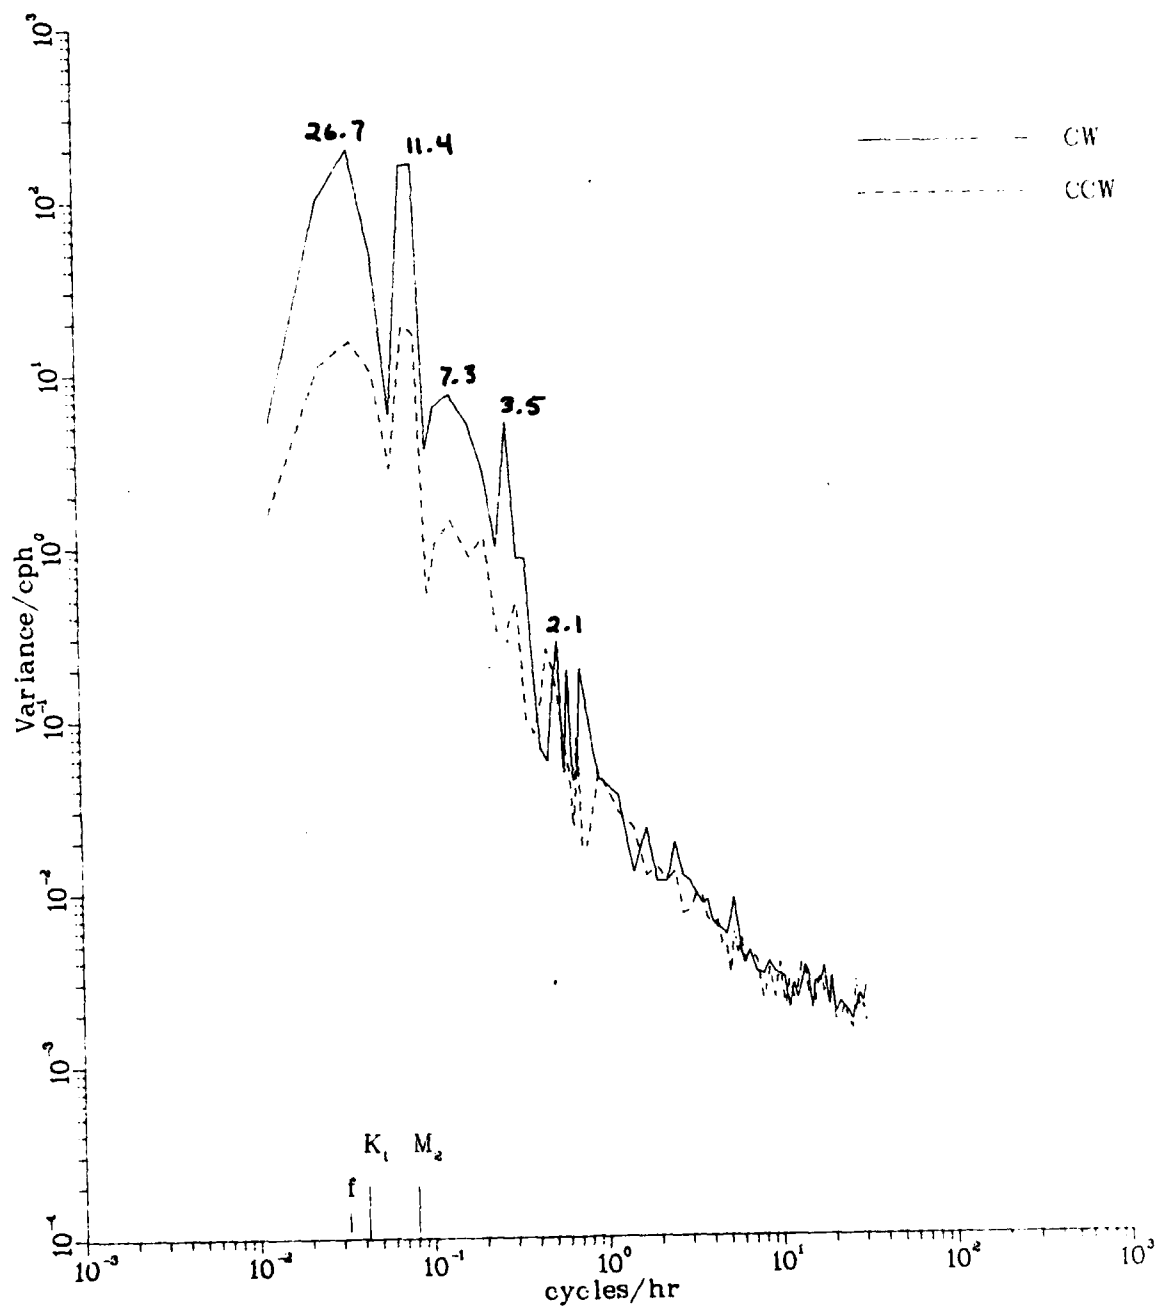

Variable . U
 Depth . 4478
 Meter 300
 Lat. 22.46.102
 Long -46. 5.493

Variable . V
 Depth . 4478
 Meter 300
 Lat. 22.46.102
 Long. -46. 5.493

Figure 15. Meter 300 rotary spectra

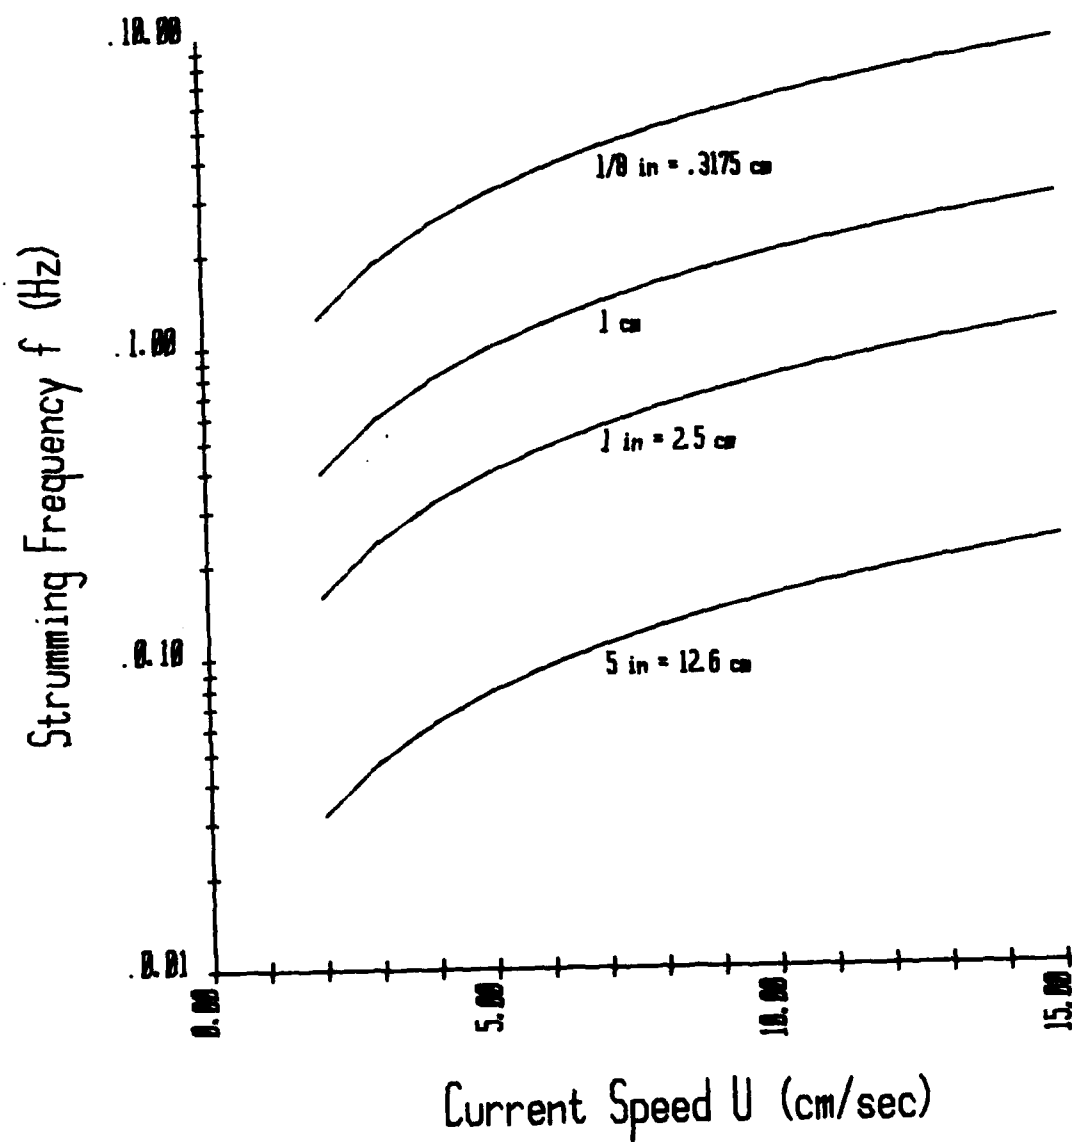


Figure 16. Strumming frequency versus current speed for cylindrical bodies of various diameters in flows of Reynolds number $2 \times 10^2 - 4 \times 10^5$.

APPENDIX

Near-surface current profiles taken with the NBIS DRCM during deployment of MSS borehole instrumentation package.

DRCM LOG SHEET

CAST #1 Date: 26 March '81 - 27 March '81

Intensive cast to be conducted prior to BIP launch

Start time: 2150Z (26) Latitude/Longitude: 22°45.35'N / 46°04.90'W

Completion time: 0151Z (27)

DEPTH (meters)		CURRENT SPEED (cm/sec)	CURRENT DIRECTION (°Magnetic)	COMMENTS
Nominal	Actual			
10	11	46	299	Considerable wire
20	21	49	294	angle
30	31	45	296	"
40	41	34	293	"
50	50	36	286	"
60	60	18	284	"
70	70	40	292	"
80	80	21	274	"
90	91	15	270	"
100	100	18	276	"
150	152	10	269	
200	200	5	249	"
250	250	13	274	Swirl at times
300	300	11	262	
350	349	7	219	
400	400	7	250	
500	500	10	284	
600	600	6	274	
700	700	11	320	
800	800	10	005	
900	900	6	363	
1000				

DRCM LOG SHEET

CAST #2 Date: 27 March '81

Intensive cast to be conducted prior to BIP launch

Start time: 0331Z Latitude/Longitude: 22° 45.35' N / 46° 04.90' W

Completion time: 0643Z

DEPTH (meters)	CURRENT SPEED (cm/sec)	CURRENT DIRECTION (°Magnetic)	COMMENTS
Nominal Actual			
10 11	2	258	
20 20	6	313	
30 31	5	270	
40 42	3	263	
50 50	4	253	
60 62	5	266	
70 70	6	294	
80 81	7	292	
90 91	6	290	
100 101	7	296	
150 149	4	274	
200 199	4	264	
250 250	7	347	Wire moving in circular
300 300	5	350	fashion under ship motion
350 350	6	014	forming
400 399	16	090	swell
500 500	17	073	"
600 604	18	087	"
700 697	6	044	
800 795	20	106	Ship's orientation changed
900 897	14	071	using bow thruster
1000 1000	16	062	

DRCM LOG SHEET

CAST # 3 date: 27 March '81

Verification cast to be taken while BIP is being lowered

Start time 0903 Z

Latitude/Longitude 22°45.35'N / 46°04.90'W

Completion time 1143 Z

DEPTH (Meters)		CURRENT SPEED (cm/sec)	CURRENT DIRECTION (°Magnetic)	COMMENTS
NOMINAL	ACTUAL			
10	11	5	212	Swell
50	51	9	127	11
70	71	10	136	11
100	100	8	156	
150	150	4	146	
200	201	5	129	Ship orientation has changed 180° since beginning
250	252	4	042	
300	302	8	098	
350	349	6	075	
400	401	7	079	Wire moving in circular fashion
500	501	18	081	
600	600	14	087	
700	701	14	075	
800	798	17	104	
900	897	12	086	
1000	997	15	091	15° Wire angle

NOTES: _____

DRCM LOG SHEET

CAST # 4 date: 27 March '81

Verification cast to be taken while BIP is being lowered

Start time 1421Z

Latitude/Longitude 22°45.35'N / 46°04.90'W

Completion time 1652Z

DEPTH (Meters)		CURRENT SPEED (cm/sec)	CURRENT DIRECTION (°Magnetic)	COMMENTS
NOMINAL	ACTUAL			
10	11	9	283	
50	50	4	249	
70	72	7	274	
100	100	3	185	
150	150	3	065	
200	199	5	105	
250	248	14	132	
300	301	5	113	
350	351	5	084	
400	401	4	109	
500	500	3	048	
600	600	6	351	
700	702	10	032	
800	800	5	349	
900	900	7	015	
1000	1001	7	025	

NOTES: Occasional erratic readings past 200m.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NORDA Technical Note 132	2. GOVT ACCESSION NO. AD-A114 135	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Ocean Current Effects on Marine Seismic Systems and Deployments		5. TYPE OF REPORT & PERIOD COVERED Final (FY81)
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Janice D. Boyd		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Ocean Research and Development Activity Ocean Science and Technology Laboratory, Code 330 NSTL Station, MS 39529		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Same as above		12. REPORT DATE January 1982
		13. NUMBER OF PAGES 42
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Currents Abyssal currents Mid Atlantic Vector averaging current meter Direct-reading current meter Ship motion Deep Sea Drilling Project Marine Seismic System Ocean bottom seismometer Marine seismic noise		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Upper level and near bottom current measurements were made near DSDP Hole 395A (22°45'N, 46°10'W) in March-April 1981 in support of the at-sea test of the Marine Seismic System Project. Four upper ocean current profiles were made during initial deployment of the borehole seismometer. Readings were noticeably contaminated by ship motion, but clearly indicated a variable yet generally slow current regime which posed minimal threat of cable entanglement. Current measurements made 5 m off bottom during seismometer testing showed marked spectral peaks at semidiurnal and inertial frequencies. Mean speed of		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 68 IS OBSOLETE
S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

4.4 cm/sec and maximum speed of 9 cm/sec were low but possibly of sufficient magnitude to cause contamination of concurrently deployed ocean bottom seismometer records with hydrodynamically generated noise. Other studies have confirmed noise contamination of OBS records by near bottom currents, with a possible 10 cm/sec threshold for its importance. While methods to detect and eliminate the noise might be developed, instrument testing and redesign to reduce sensitivity to contamination is probably wiser.



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

**DAT
FILM**