

AD-A114 943

AIR FORCE AEROSPACE MEDICAL RESEARCH LAB WRIGHT-PATT--ETC F/8 1/2
USAF BIOENVIRONMENTAL NOISE DATA HANDBOOK. VOLUME 148. T-37B IN--ETC(U)
NOV 81 H K HILLE
AMRL-TR-75-50-VOL-148

UNCLASSIFIED


NL

1-1
104-104



END
DATE
FILMED
DTIC




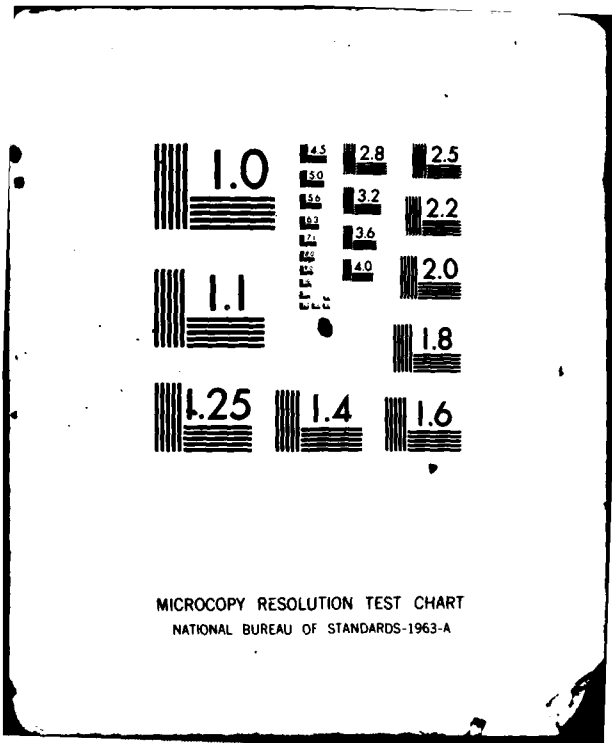


MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

FILE COPY

AD A114943

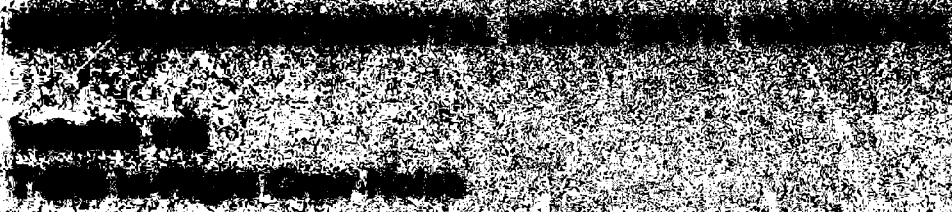

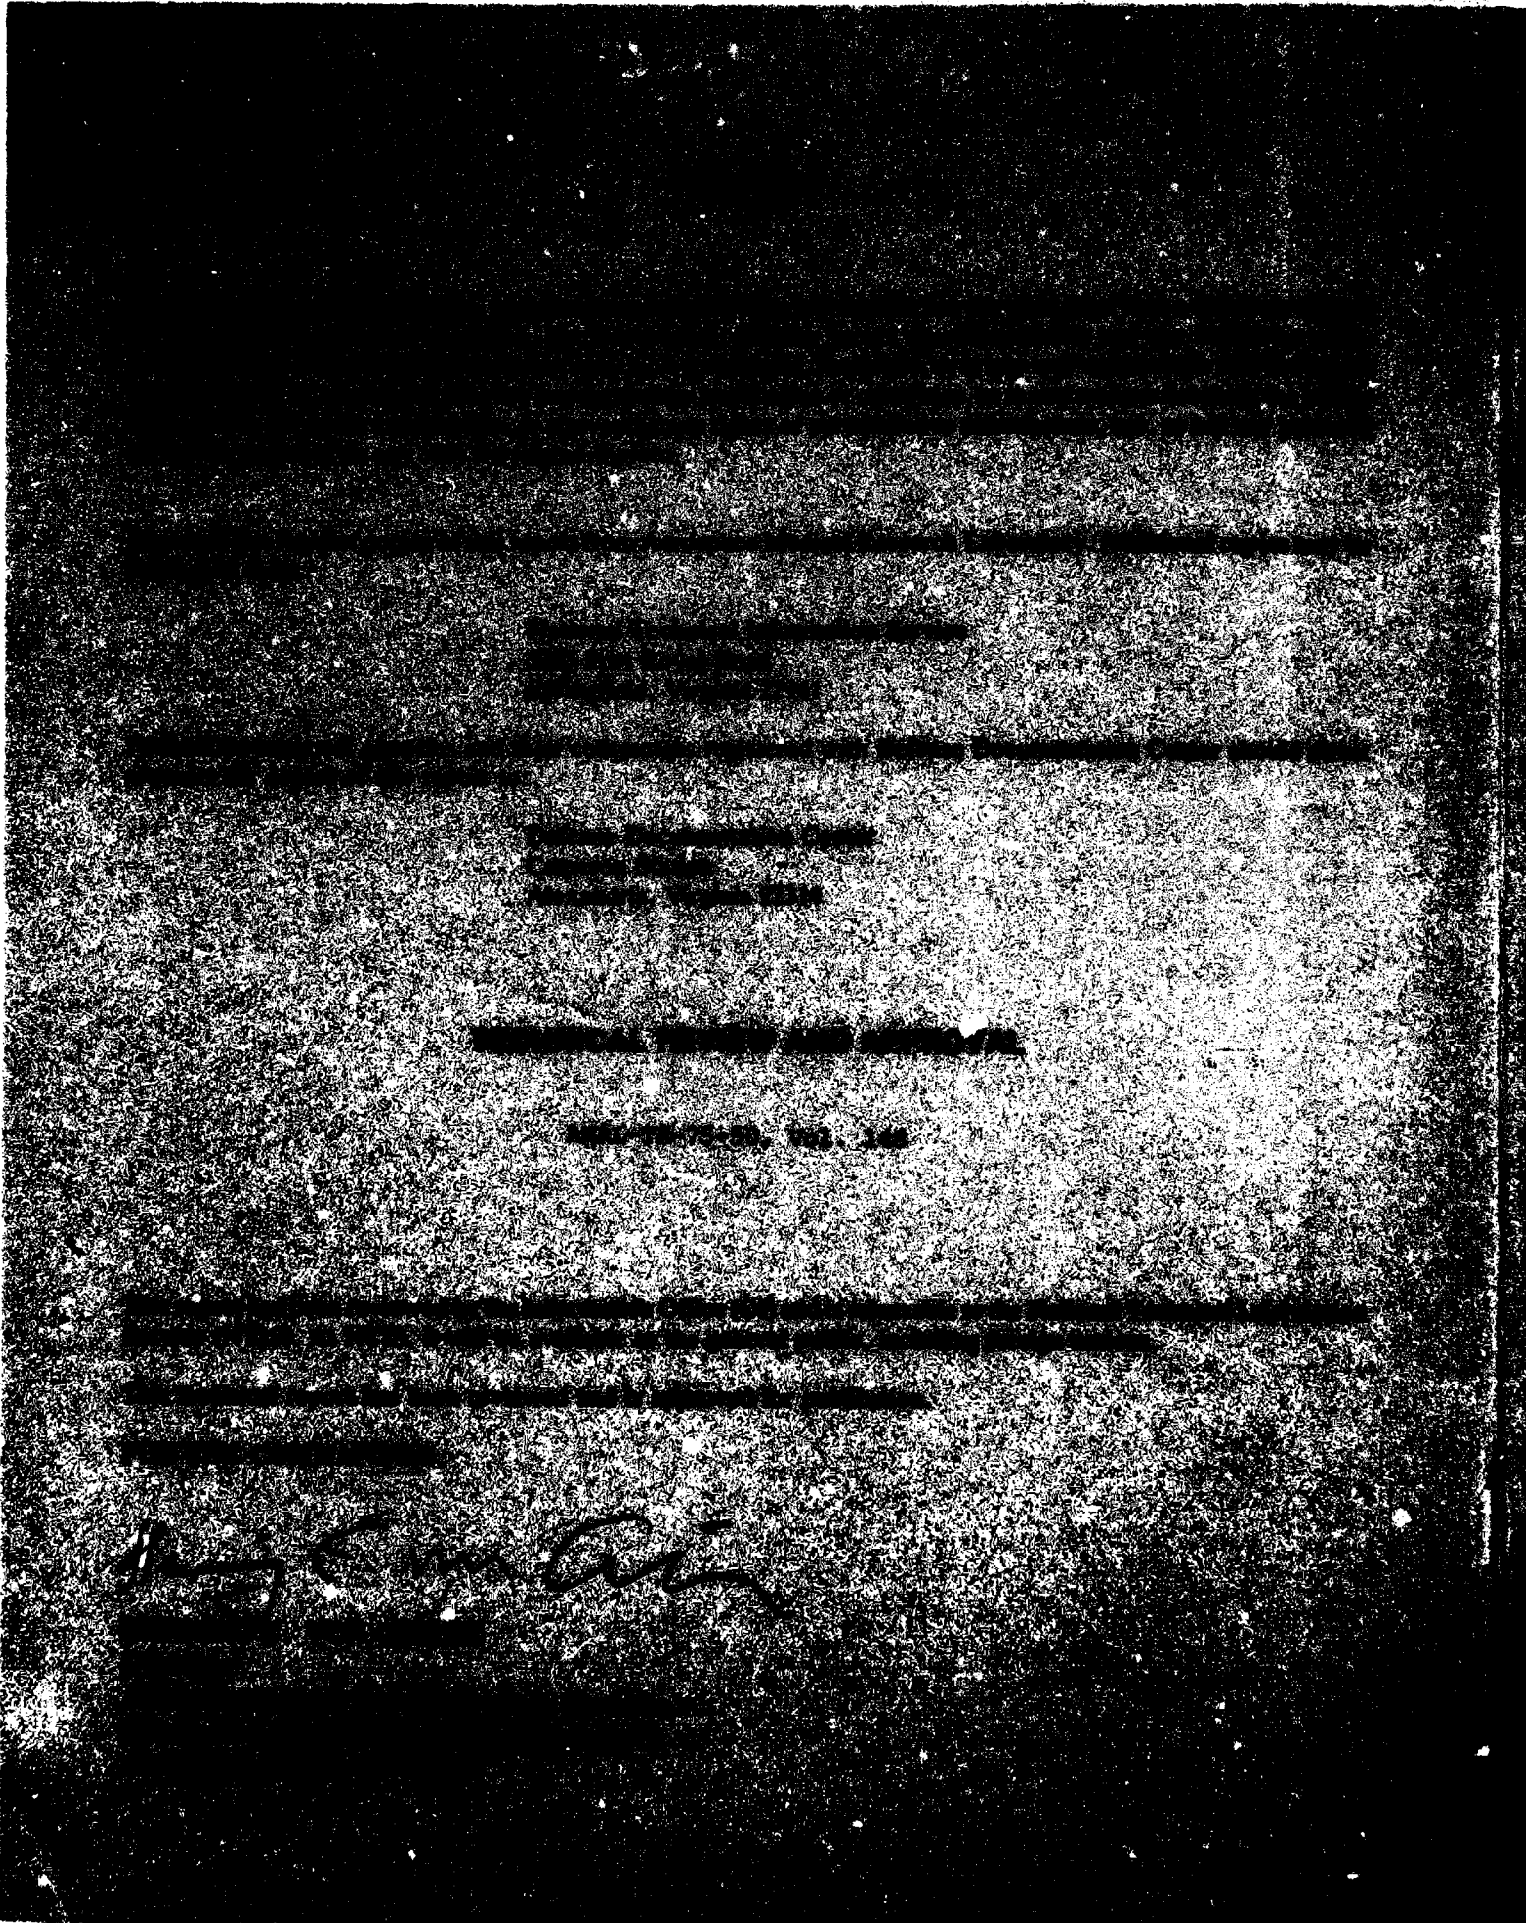

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AMRL-TR-75-50, Vol. 148	2. GOVT ACCESSION NO. AD-A324943	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) USAF BIOENVIRONMENTAL NOISE DATA HANDBOOK: T-37B In-Flight Crew Noise	5. TYPE OF REPORT & PERIOD COVERED Volume 148 of a series	
	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) Harald K. Hille	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Air Force Aerospace Medical Research Laboratory Aerospace Medical Division, Air Force Systems Command, Wright-Patterson AFB, OH 45433	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62202F 72310812	
11. CONTROLLING OFFICE NAME AND ADDRESS Same as above	12. REPORT DATE November 1981	
	13. NUMBER OF PAGES 15	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) Unclassified	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Noise Noise Environments Bioenvironmental Noise In-flight Crew Noise T-37B Aircraft		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The T-37B is a USAF two-seat primary trainer aircraft. This report provides measured data defining the bioacoustic environments at flight crew/passenger locations inside this aircraft during normal flight operations. Data are reported at one location for 19 different flight conditions and psychoacoustic measures: overall and band sound pressure levels, C-weighted and A-weighted sound levels, preferred speech interference level, perceived noise level, and limiting times for total daily exposure of personnel with and		

cont'd →

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

without standard Air Force ear protectors. Refer to Volume 1 of this handbook "USAF Bioenvironmental Noise Data Handbook, Vol 1: Organization, Content and Application," AMRL-TR-75-50(1) 1975, for discussion of the objective and design of the handbook, the types of data presented, measurement procedures, instrumentation, data processing, definitions of quantities, symbols, equations, applications, limitations, etc.

A

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

PREFACE

This report was prepared by the Biodynamic Environment Branch, Air Force Aerospace Medical Research Laboratory, under Project/Task 723108, Crew Safety In Operational Noise Environments.

The author acknowledges the efforts of Mr. John N. Cole who established the data analysis requirements, Mr. Henry Mohlman and Mr. Fred Lampley of the University of Dayton who assisted in the mechanics of data processing and Mrs. Norma Peachey who typed this report and prepared it for publication.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	



TABLE OF CONTENTS

	Page
INTRODUCTION	3
IN-FLIGHT NOISE	4

LIST OF TABLES

1. Measurement Location and Test Conditions for Noise Measurements	5
2. Measured Sound Pressure Level	
1/3 Octave Band.....	6-7
Octave Band.....	8-9
3. Measures of Human Noise Exposure	10-11

INTRODUCTION

The T-37B is a USAF two-seat primary trainer aircraft manufactured by the Cessna Aircraft Company, Wichita, Kansas. Power is provided by two Continental J-69-T-25 turbojet engines each rated at 1025 lbs. maximum takeoff thrust. The engines are manufactured by Teledyne CAE, Toledo, Ohio.

This volume provides measured data defining the bioacoustic environments produced inside the aircraft. Such data are essential to evaluate ear protection requirements, limiting personnel exposure times, voice communication capabilities, and annoyance problems associated with operations of the T-37B aircraft.

This volume is one of a series published by the Aerospace Medical Research Laboratory (AMRL) under the same report number (AMRL-TR-75-50) as a multi-volume handbook that quantifies the noise environments produced at flight/ground crew locations and in surrounding communities by operations of Air Force aircraft and ground support equipment. The far-field, community-type, noise data in the handbook describe the noise produced during *ground operations* of aircraft, ground support equipment, and other ground-based equipment or facilities.

Volume 1 of this handbook discusses the objectives and design of the handbook, the types of data presented, measurement procedures, instrumentations, data processing, definitions of quantities, symbols, equations, applications, limitations, etc. *Refer to Volume 1* (reference 1) for such information because it is not repeated in other handbook volumes.

A cumulative index lists those aerospace systems contained in the handbook, and identifies the specific volumes containing each type of environmental noise data available (i.e., in-flight/flight crew and passenger noise, near-field/ground crew noise, far-field/community noise). Volume numbers are assigned sequentially as individual volumes are published. This index is periodically updated as individual volumes are published, and is available upon request from AMRL/BBE, Wright-Patterson AFB, OH 45433. Organizations on the distribution list for the handbook will automatically receive a copy of the updated index as it is generated.

Direct any questions concerning the technical data in this report and other handbook volumes to: AMRL/BBE, Wright-Patterson AFB, OH 45433; AUTOVON 78-53675 or 78-53664; Commercial (513) 255-3675 or (513) 255-3664.

1. Cole, John N., *USAF Bioenvironmental Noise Data Handbook, Volume 1: Organization, Content and Application*, AMRL-TR-75-50 (1), Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, 1975.

IN-FLIGHT NOISE

Measurements

All noise measurements were made on-board a T-37B aircraft during typical speed, altitude, and flight maneuver conditions. These levels describe the standard T-37B environments but may not be representative of those levels encountered if the aircraft has been configured differently (e.g., major equipment or structural changes).

Acoustic measurements were made inside the cockpit at the pilot's location. Table 1 lists the measurement location and test conditions as numeric/alphabetic designators which are used on the data pages. The designator 1/A means measurement location 1 and test condition A, etc.

The microphone was attached to the pilot's helmet by means of a lightweight boom. This arrangement enabled adjustment of the microphone close to the ear level at a distance of 0.1 meter with its diaphragm parallel and facing away from the helmet's surface. In the analysis, microphone corrections for random incidence were applied to the overall systems response. The recorded samples were analyzed using a four or eight second integration time to obtain a power-averaged level which effectively smooths out short duration fluctuations and best describes the exposure.

Results

The measured data presented in Table 2 define the sound pressure levels (SPL) produced inside the T-37B aircraft at the specified location. This table includes the overall, 1/3 octave band, and octave band levels. From these data, C-weighted and A-weighted sound levels, maximum permissible time for one exposure per day (AFR 161-35) with and without standard Air Force ear protectors, preferred speech interference level, and perceived noise level are calculated and presented in Table 3. These measures are widely used to assess the effects of noise on personnel and their performance.

TABLE 1
MEASUREMENT LOCATION AND TEST CONDITIONS
T-37B, WRIGHT-PATTERSON AFB, OH; 6 AUG 81
SER NO. 00141

Location	Position	Height Above Deck
1	Co-Pilot	Seated Head Level

Condition	Description
A	Engines Idle, Canopy Closed ECS ON, 39% RPM
B	Engines Idle, Canopy Closed, ECS OFF, 39% RPM
C	Engines Idle, Canopy Open, 39% RPM
D	Engines Military, Canopy Closed, ECS ON, 80% RPM
E	Engines Military, Canopy Closed, ECS OFF, 80% RPM
F	Taxi
G	Takeoff
H	Climb to 6,000 ft
I	Cruise 6,000 ft, 220 KIAS, 95% RPM
J	Climb to 20,000 ft, 160 KIAS, 99% RPM
K	Cruise at 20,000 ft, 205 KIAS, 98% RPM, ECS ON
L	Cruise at 20,000 ft, 205 KIAS, 99% RPM, ECS OFF
M	Start of Descent to 10,000 ft
N	Descend to 10,000 ft, at 17,000 ft, speed brakes out
O	Descend to 10,000 ft, at 13,000 ft, speed brakes up
P	Cruise at 10,000 ft, 190 KIAS, 85% RPM, ECS ON
Q	Cruise at 10,000 ft, 190 KIAS, 85% RPM, ECS OFF
R	Descend to 6,000 ft
S	Landing Roll

TABLE: MEASURED SOUND PRESSURE LEVEL (DB) 1/3 OCTAVE BAND		IDENTIFICATIONS									
2		OMEGA 3.2 TEST BM-801-881 RUN 81 09 NOV 81 PAGE F1									
NOISE SOURCE/SUBJECT:		OPERATION:									
T-37B AIRCRAFT											
IN-FLIGHT NOISE LEVEL											
		LOCATION/CONDITION									
FREQ (HZ)		1/A	1/B	1/C	1/D	1/E	1/F	1/G	1/H	1/I	1/J
25	83	84	88	80	83	86	83	76	76	74	74
31.5	76	79	84	76	79	79	81	74	76	76	73
40	76	77	87	76	79	83	81	77	77	77	74
50	81	81	92	78	79	85	84	79	79	79	75
63	78	77	82	86	84	77	99	96	85	88	88
80	82	82	84	88	88	79	100	99	88	91	91
100	85	85	85	89	88	79	95	94	89	90	90
125	93	94	88	92	92	82	96	93	90	89	89
160	87	87	84	89	89	83	92	88	86	85	85
200	90	89	86	92	92	82	96	95	93	92	92
250	94	93	94	98	98	89	104	99	95	97	97
315	90	98	88	97	97	85	104	101	98	99	99
400	93	93	88	95	95	84	104	101	95	97	97
500	94	94	89	93	93	86	100	99	95	95	95
630	90	90	90	89	89	86	96	95	93	92	92
800	87	88	90	88	87	85	95	93	90	91	91
1000	89	89	88	87	86	83	97	96	91	92	92
1250	88	87	89	88	89	84	95	94	90	90	90
1600	86	85	88	86	85	82	92	90	87	87	87
2000	99	98	102	83	83	89	89	88	84	84	84
2500	97	96	102	81	81	97	86	86	82	83	83
3150	79	80	81	80	79	80	84	84	81	80	80
4000	81	81	84	85	85	78	84	83	82	80	80
5000	79	79	83	91	92	79	85	85	87	80	80
6300	80	80	84	77	78	74	88	90	81	85	85
8000	74	75	79	77	78	72	79	78	77	75	75
10000	71	72	75	83	84	68	79	79	78	75	75
OVERALL	105	104	106	104	104	100	111	109	105	105	105

LEVEL CORRECTED TO REMOVE BACKGROUND/ELECTRONIC NOISE.

TABLE: MEASURED SOUND PRESSURE LEVEL (DB) OCTAVE BAND		IDENTIFICATIONS									
2		OMEGA 3.2 TEST BH-801-081									
NOISE SOURCE/SUBJECT:		RUN 02									
T-37B AIRCRAFT		09 NOV 61									
IN-FLIGHT NOISE LEVEL		PAGE J2									
		LOCATION/CONDITION									
		1/K	1/L	1/M	1/N	1/O	1/P	1/Q	1/R	1/S	
FREQ (HZ)											
31.5		76	81	89	93	79	79	82	83	93	
63		87	87	97	98	85	87	90	86	92	
125		90	91	95	97	90	92	89	90	91	
250		99	100	100	101	96	99	99	97	96	
500		99	99	95	96	94	97	97	96	95	
1000		92	93	89	91	91	93	91	91	94	
2000		87	88	84	86	86	87	87	88	103	
4000		82	82	84	85	86	90	88	89	88	
8000		80	80	77	77	78	80	80	80	82	
OVERALL		103	103	104	105	100	103	102	101	106	

MEASURES OF HUMAN NOISE EXPOSURE										IDENTIFICATION
NOISE SOURCE/SUBJECT	(OPERATION	(
T-37B AIRCRAFT	((OMEGA 3.2
IN-FLIGHT NOISE LEVEL	((TEST BH-001-881
	((RUN 01
	((09 NOV 81
	((PAGE H1
LOCATION/CONDITION										
1/A	1/B	1/C	1/D	1/E	1/F	1/G	1/H	1/I	1/J	
HAZARD/PROTECTION										
C-WEIGHTED OVERALL SOUND LEVEL (OASLC IN DB) AT EAR										
A-WEIGHTED OVERALL SOUND LEVEL (OASLA IN DB) AT EAR										
MAXIMUM PERMISSIBLE TIME (T IN MINUTES) FOR ONE EXPOSURE PER DAY (AFR 161-35, JULY 73)										
NO PROTECTION										
OASLC	104	104	106	104	104	100	111	109	104	105
OASLA	104	103	107	100	100	100	106	104	101	101
T	15	16	9	30	30	30	11	15	25	25
HGU-2A/P HELMET WITH M-154										
OASLA*	90	89	88	93	93	84	99	96	93	93
T	170	202	240	101	101	480	36	60	101	101
HGU-2A/P HELMET WITH M-154(A)										
OASLA*	85	85	84	89	89	80	96	92	89	90
T	404	404	480	202	202	960	60	120	202	170
HGU-2A/P HELMET WITH CUSTOM LINER										
OASLA*	95	95	95	96	96	89	103	101	97	98
T	71	71	71	60	60	202	18	25	50	42
COMMUNICATION										
PREFERRED SPEECH INTERFERENCE LEVEL (PSIL IN DB)	97	97	97	93	93	92	100	99	95	95
ANNOYANCE										
PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT IN PNOB)	119	119	123	116	117	119	120	119	115	114
TONE CORRECTION (C IN DB)	3	3	3	3	3	4	1	2	2	1
PNLT	119	119	123	116	117	119	120	119	115	114
C	3	3	3	3	3	4	1	2	2	1

* BASED ON CALCULATED SPL SPECTRUM UNDER PROTECTIVE DEVICE.

DA
FILM

