

AD-A115 290

CASE WESTERN RESERVE UNIV CLEVELAND OH PLASMA RESEAR--ETC F/G 20/9  
PLASMA INJECTION FOR A SHIVA MACHINE.(U)  
JAN 80 O K MAWARDI, A M FERENDECI, R MESLI


UNCLASSIFIED

NL .

1-1  
1-1  
1-1



END  
DATE  
FILMED  
7 82  
DTIC



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

2

# PLASMA INJECTION FOR A SHIVA MACHINE

O. K. Mawardi  
A. M. Ferendeci  
R. Mesli

Plasma Research Laboratory  
Case Western Reserve University  
Cleveland, OH 44106

January 1980

Final Report

Approved for public release; distribution unlimited.

DTIC  
ELECTE  
S JUN 9 1982 D  
B

AIR FORCE WEAPONS LABORATORY  
Air Force Systems Command  
Kirtland Air Force Base, NM 87117

82 06 07 291

AD A115290



DTIC FILE COPY

This final report was prepared by the Plasma Research Laboratory, Case Western Reserve University, Cleveland, Ohio, under AFOSR PD-77-115, ILIR7711, with the Air Force Weapons Laboratory, Kirtland Air Force Base, New Mexico. Dr. James H. Degnan (NTYP) was the Laboratory Project Officer-in-Charge.

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This report has been authored by a contractor of the United States Government. The United States Government retains a nonexclusive, royalty-free license to publish or reproduce the material contained herein, or allow others to do so, for the United States Government purposes.

This report has been reviewed by the Public Affairs Office and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

*James H. Degnan*  
JAMES H. DEGNAN, PhD  
Project Officer

FOR THE DIRECTOR

*Norman F. Roderick*  
NORMAN F. RODERICK  
Lt Colonel, USAF  
Chief, Advanced Concepts Branch

*Thomas W. Ciambone*  
THOMAS W. CIAMBONE  
Colonel, USAF  
Chief, Applied Physics Division

---

DO NOT RETURN THIS COPY. RETAIN OR DESTROY.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFWL-TR-78-256	2. GOVT ACCESSION NO. AD-A115 290	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PLASMA INJECTION FOR A SHIVA MACHINE		5. TYPE OF REPORT & PERIOD COVERED Final
		6. PERFORMING ORG. REPORT NUMBER AFOSR-78-3603-240
7. AUTHOR(s) O. K. Mawardi A. M. Ferendeci R. Mesli		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Plasma Research Laboratory Case Western Reserve University Cleveland, OH 44106		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS  61101F/ILIR7711
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Weapons Laboratory (NTYP) Kirtland AFB, NM 87117		12. REPORT DATE January 1980
		13. NUMBER OF PAGES 7
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)  Plasma Beam Plasma Injection Dense Plasma		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  A plasma beam produced by a plasma gun of the Cheng type is used to explore a new method of injecting a densed fully ionized plasma in a Shiva machine. In preliminary experiments the beam was injected through a hole drilled in a metal plate to simulate the backplate of the compression chamber of the Shiva machine. Preliminary measurements by an Ashby-Jephcott laser interferometer indicate that densities close to $5 \times 10^{18} / \text{cm}^3$ can be produced in the compression chamber.		

DD FORM 1 JAN 73 1473

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Introduction

The concept of substituting the "liner" foil in SHIVA implosion chambers by plasma injected from a subsidiary gun had been proposed a few years ago by M. Wolfe\*. In order to test the feasibility of this idea, a series of investigations was performed in which plasma produced by a coaxial gun of the Cheng type (Ref. 1) was to be introduced in a container analogous to the implosion chamber.

Because the plasma had to be injected through a number of circular holes whose centers were arranged on a circle, there was some concern about the influence of the non-uniform distribution in the azimuthal direction of the plasma density. To evaluate the extent of this non-uniformity it was decided to study the behavior of the plasma as it is injected through a circular orifice in a flat plate and to compare it with the behavior of the plasma as it escapes from the two neighboring holes.

This report summarizes the results obtained and reports on the preliminary measurements of electron densities and on photographic observations of the plasma jet.

Criteria for Plasma Densities

The required densities were found from the assumption that 1 mg of plasma for the MJB or 100 µg for the 100 KJB was to be injected inside the implosion chamber. The plasma was to be introduced through

1. Cheng, D. Y., "Deflagration Waves in Pulsed Plasma Accelerators," Bull. Am. Phys. Soc. 13, 1560, 1968.

\*M. Wolfe, private communication. Wolfe unfortunately never had an opportunity to test his idea since he died in an accident.



<input checked="" type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>
PER
CALL
MC

Codes  
nd/or

Dist	Special
A	

90 holes, each 1 cm in diameter and aligned on a circle of 20 cm in radius. The implosion chamber is 2 cm in height. It is important, therefore, that the plasma be uniform in the axial direction and not recombine during the filling time.

The number densities required for the interaction chamber satisfying the above conditions are shown in Table 1.

TABLE 1  
Number Densities

Density	MJB (1 mg)	100 KJB (100 ug)
Hydrogen	$4.23 \times 10^{18} \text{ cm}^{-3}$	$4.23 \times 10^{17} \text{ cm}^{-3}$
Helium	$1.06 \times 10^{18} \text{ cm}^{-3}$	$1.06 \times 10^{17} \text{ cm}^{-3}$
Argon	$1.57 \times 10^{17} \text{ cm}^{-3}$	$1.57 \times 10^{16} \text{ cm}^{-3}$
Copper	$6.66 \times 10^{16} \text{ cm}^{-3}$	$6.66 \times 10^{15} \text{ cm}^{-3}$

Now, the characteristic radiation cooling time is given by  $\tau = \frac{n_e k T_e}{W}$  where  $W$ , the radiation power per unit volume, is composed of the free - free transitions and free-bound transitions. Actually,

$$W = W_{ff} + W_{fb}$$

$$= (1.52 \times 10^{-32}) n_e^2 T_e^{1/2} + (4.11 \times 10^{-31}) n_e^2 T_e^{-1/2} \text{ in } W/\text{cm}^3$$

In the above relation  $n_e$  is the electron density per  $\text{cm}^3$  and  $T_e$  is in eV. The temperature thus falls like  $T_e = T_{\text{initial}} \exp(-\frac{t}{\tau})$ .

Now, if we require  $v_{\text{th}} = 0.01 v_{\text{direct}}$  in the implosion chamber and  $v_{\text{direct}} = 10 \text{ cm}/\mu\text{s}$ , then

$$v_{\text{th}} = \left( \frac{2T_e}{m_e} \right)^{1/2} = 0.01 v_{\text{direct}} = 10^5 \text{ cm/s}$$

This defines

$$T_e = \frac{1}{2} m_e \times 10^{10}$$
$$= T_{\text{init.}} \exp\left(-\frac{t}{\tau}\right)$$

Hence, for a given initial  $T_{\text{init.}} = 10$  eV, the time needed to allow the temperature to cool to  $T_e = 3$  eV is of the order of 1  $\mu$ s.

The density  $n_e$  needed above to satisfy the requirement that the plasma will not recombine during the time the plasma fills the interaction chamber indicates that one would need a density of at least  $10^{17}$   $\text{cm}^{-3}$  (for He).

#### Summary of Diagnostics Performed

The SHIVA implosion chamber was simulated by two parallel plates. One of the plates had a hole 1 cm in diameter. In a subsequent experiment the perforated plate was replaced with one which had two holes.

The important parameters that were needed to be measured were: the directed velocity of the plasma prior to its impinging on the plate, its velocity after its escaping through the orifice in the plate, the extent of divergence of the plasma jet as it leaves the plate and the density of the plasma in these various conditions.


The velocities of the plasma were inferred from an STL image converter camera used in a streaking mode. The divergence of the beam was directly seen from the STL camera used as a frame camera. The plasma density was measured by means of an Ashby-Jephcott (Ref. 2) laser interferometer used directly as developed by Ashby and Jephcott or as modified by Bekefi (Ref. 3). The first method

2. Ashby, D. E. T., et al., "Performance of the He-Ne Gas Laser as an Interferometer for Measuring Plasma Density," J. Appl. Phys. 36, 29, 1965.
3. Hopper, E., and Bekefi, G., "Laser Interferometry for Repetitively Pulsed Plasmas," J. Appl. Phys. 37, 4083, 1966.

is suited for higher density range in which the interferometer yields several fringes, while the other is specially suited when one detects a fraction of a fringe.

Results

The beam velocity was observed to be approximately 5 to 10 cm/ $\mu$ s (Fig. 1). This higher velocity works to our advantage since the transit time of the plasma over a length equal to the height of the implosion chamber is much shorter than the recombination time of the plasma.

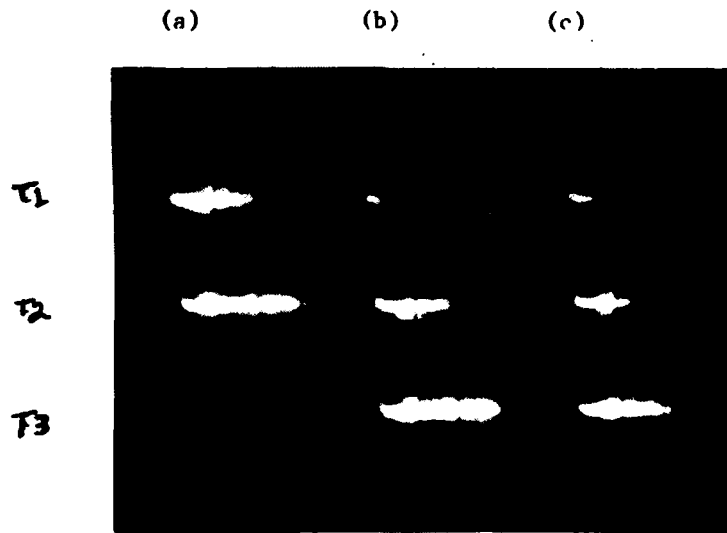

$(t_1, t_2, t_3) = (3, 2, 5) \mu\text{sec} \quad (1, 2, 2) \mu\text{sec} \quad (1, 1, 1) \mu\text{sec}$

Figure 1. Plasma beam at different framing sequences.  $(t_1, t_2, t_3)$  are delays in  $\mu\text{sec}$  between frames.  $t_1$  is the initial time delay with respect to the beams first appearance at the muzzle of the gun ( $V_0 = 9.0 \text{ kV}$ ).

Al or Cu plates, 6.25 mm in thickness, are used for the plates. It was found that it was important to electrically float the plates. Where grounded, appreciable return currents flow to the ground. These currents, if asymmetric, cause the plasma beam to acquire a whipping motion.

Several fringes were detected on the interferometer (Fig. 2) thus indicating that the beam electron density is quite high. In fact, we estimated it to be at least  $5 \times 10^{17} \text{ cm}^{-3}$  at a distance of 10 cm away from the muzzle of the gun. This is also the location of the plate with the hole.

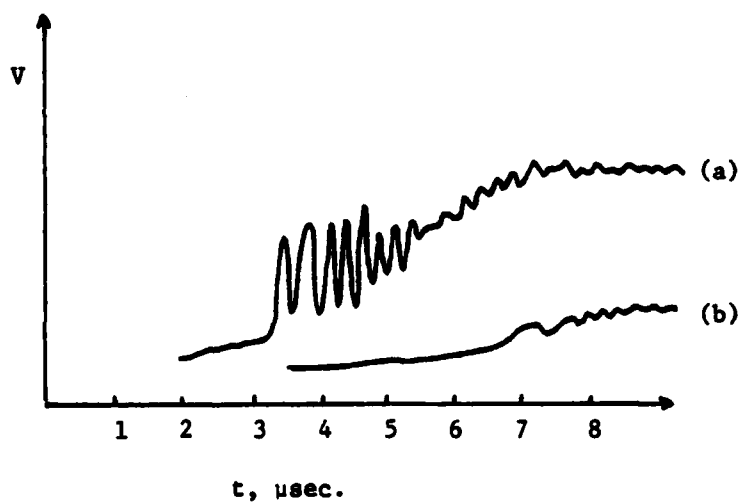


Figure 2. Interferometer output for the plasma beam:

- a) with plasma
- b) without plasma

Some of the Al (or Cu) lines are very close to the He-Ne laser line, thus masking the He-Ne laser line and preventing interferometric density measurements of the plasma beam after passing through the hole in the plate.

Visual observation of the appearance of the plate revealed that the plate was seriously ablated (Fig. 3). It thus appeared that an appreciable amount of metal vapor is injected in the implosion chamber together with the plasma.



Figure 3. Al plate after 5 shots. Ablation of the plate surface and the hole is clearly visible.

The density of ablatants can best be found from the respective measurement of intensities of radiation of Al (for an Al plate) or Cu lines. These necessitate narrow band interference filters to differentiate these lines from the other lines.

Since we did not have such filters in our laboratory, we estimated the ablatant density from the mass of material ablated. This estimate yielded the remarkable result that about  $\sim$  mg of Al per shot appeared to be entrained by the plasma for each shot. Such a high ablation of the plate material may thus lower the restriction of the higher densities initially estimated for filling the interaction chamber with plasma.

The preliminary results described here show that plasma injection is most promising.

DATE  
ILME  
— 8