

AD A115610

AD

AD-E400 846


CONTRACTOR REPORT ARLCD-CR-82022

TNT EQUIVALENCY OF RDX

L. MARS
TECHNICAL SERVICES LABORATORY
COMPUTER SCIENCES CORPORATION
NASA NATIONAL SPACE TECHNOLOGY LABORATORIES
NSTL STATION, MS 39529

D. WESTOVER
PROJECT ENGINEER
J. CALTAGIRONE
PROJECT LEADER
ARRADCOM

JUNE 1982



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER
WEAPON SYSTEMS LABORATORY
DOVER, NEW JERSEY

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED.

DTIC FILE COPY

DTIC
ELECTE
JUN 16 1982
S D

82 06 09 041

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.

The citation in this report of the names of commercial firms or commercially available products or services does not constitute official endorsement by or approval of the U.S. Government.

Destroy this report when no longer needed. Do not return to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Contractor Report ARLCD-CR-82022	2. GOVT ACCESSION NO. AD-A115 610	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) TNT EQUIVALENCY OF RDX		5. TYPE OF REPORT & PERIOD COVERED Test Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) L. Mars, Computer Science Corporation D. Westover, Project Engineer, ARRADCOM J. Caltagirone, Project Leader, ARRADCOM		8. CONTRACT OR GRANT NUMBER(s) MIPR 8311-0089
9. PERFORMING ORGANIZATION NAME AND ADDRESS Technical Services Laboratory Computer Sciences Corporation NASA National Space Technology Laboratories NSTL Station, MS 39529		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS MMT-5794285
11. CONTROLLING OFFICE NAME AND ADDRESS ARRADCOM, TSD STINFO Div (DRDAR-TSS) Dover, NJ 07801		12. REPORT DATE June 1982
		13. NUMBER OF PAGES 45
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) ARRADCOM, LCWSL Energetic Systems Process Div (DRDAR-LCM-SP) Dover, NJ 07801		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This project was accomplished as part of the U.S. Army's Manufacturing Methods and Technology program. The primary objective of this program is to develop, on a timely basis, manufacturing processes, techniques, and equipment for use in production of Army materiel.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) TNT equivalency Fireball duration RDX MMT-Ammunition Shipping containers Transfer container (Nutsche) Fireball diameter		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Peak side-on blast overpressure and scaled positive impulse have been measured for RDX using configurations typical in a manufacturing facility. Quantities of 22.68 kg (50 lb), 45.36 kg (100 lb), 27.22 kg (60 lb), and 54.4 kg (120 lb) were tested in simulated shipping drums and simulated Nutsche containers. High explosive equivalency values for each test size were obtained as a function of scaled distance by comparison to known pressure and impulse characteristics for TNT surface bursts		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SUMMARY

High explosive RDX was detonated in scaled down configurations representative of the transfer container (Nutsche) and the shipping container typical in a manufacturing facility. Blast output parameters were measured and TNT equivalency was computed based on comparison with TNT hemispherical surface bursts. The results are shown in the table below.

Within experimental error, the pressures were greater than 100% at all scaled distances in all configurations. Impulse equivalencies were greater than 100% at the near-field scaled distances $\leq 2.14 \text{ m/kg}^{1/3}$ ($5.4 \text{ ft/lb}^{1/3}$), and varied above and below 100% at the far-field scaled distances $\geq 3.57 \text{ m/kg}^{1/3}$ ($9 \text{ ft/lb}^{1/3}$). Test results indicated that pressure and impulse values were dependent upon geometry (transfer container versus shipping container) and, to within experimental error, scaled according to the cube root of the charge weight. These high equivalency results are consistent with tests performed on C_4^1 and A_3^2 which contain high percentages of RDX. It is recognized that charge shape has a significant effect on airblast parameters. Studies of cylinders, spheres, and hemispheres show the equivalency to be variable with scaled distance.³ Airblast measurements from spherical and hemispherical surface bursts of TNT are well documented in many other literature sources concerning airblast phenomenon. In comparing the RDX airblast measurements to TNT hemispherical data it should be noted that pressure and impulse changes are relatively insensitive to weight changes ($Z \approx 1/w^{1/3}$), however equivalent weights amplify the pressure (or impulse) differences.⁴

Configuration	TNT Equivalency (%) at Scaled Distance											
	1.19 m/kg ^{1/3} (3.0 ft/lb ^{1/3})		1.59 m/kg ^{1/3} (4.0 ft/lb ^{1/3})		2.14 m/kg ^{1/3} (5.4 ft/lb ^{1/3})		3.57 m/kg ^{1/3} (9.0 ft/lb ^{1/3})		7.14 m/kg ^{1/3} (18.0 ft/lb ^{1/3})		15.87 m/kg ^{1/3} (40.0 ft/lb ^{1/3})	
	P	I	P	I	P	I	P	I	P	I	P	I
Simulated shipping drum 22.68 kg (50 lb) charge	350	150	413	155	210	120	150	144	200	70	259	54
Simulated shipping drum 45.36 kg (100 lb) charge	329	102	423	126	246	120	147	77	156	102	244	55
Simulated Nutsche container 27.22 kg (60 lb) charge	493	135	540	254	367	258	172	94	116	113	223	67
Simulated Nutsche container 54.43 kg (120 lb) charge	526	113	515	241	316	232	148	75	132	107	255	39

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	



CONTENTS

	Page
Introduction	1
Background	1
Objective	1
Experimental Methods	1
Materials	1
Test Plan	10
Instrumentation	14
Results	14
Data Analysis	14
Test Results	14
Discussion	29
Conclusions	29
Recommendations	29
References	
Appendixes	31
A Test Data Sheets	39
B Selected Photographs	45
Distribution List	

TABLES

	Page
1 Transducer calibration and placement	
2 Summary of test results of 22.68 kg (50 lb) charge simulated shipping drum scaled	17
3 Summary of test results of 45.36 kg (100 lb) charge simulated shipping drum scaled	17
4 Summary of test results of 27.22 kg (60 lb) charge simulated Nutsche container scaled	18
5 Summary of test results of 54.43 kg (120 lb) charge simulated Nutsche container scaled	18
6 Fireball diameter and duration	28

FIGURES

1 Test container configuration	11
2 Typical charge placement for equivalency tests	12
3 Test area showing transducer and camera placement	12
4 TNT hemisphere reference data	15
5 Pressure and impulse versus scaled distance for 22.68 kg (50 lb) charge simulated shipping drum scaled	19
6 Pressure and impulse equivalencies for the 22.68 kg (50 lb) charge simulated shipping drum scaled	20
7 Pressure and impulse versus scaled distance for the 45.36 kg (100 lb) charge simulated shipping drum scaled	21
8 Pressure and impulse equivalencies for the 45.36 kg (100 lb) charge simulated shipping drum scaled	22
9 Pressure and impulse versus scaled distance for 27.22 kg (60 lb) charge simulated Nutsche container scaled	23
10 Pressure and impulse equivalencies for the 27.22 kg (60 lb) charge simulated Nutsche container scaled	24
11 Pressure and impulse versus scaled distance for 54.43 kg (120 lb) charge simulated Nutsche container scaled	25

12	Pressure and impulse equivalencies for the 54.43 kg (120 lb) charge simulated Nutsche container scaled	26
13	Deviation from cube root scaling	27

INTRODUCTION

BACKGROUND

Tests were conducted under Project No. 5794285, TNT Equivalency, as an engineering effort to provide TNT equivalency data in support of Project 5873000.

The tests covered those configurations which are to be encountered at sensitive locations at the explosive manufacturer's facility. These configurations are the transfer container (Nutsche) and the shipping container. The amounts of RDX in these configurations are 544.3 kg (1200 lb) and 90.7 kg (200 lb). The large weights contained in these configurations were scaled down for these tests.

OBJECTIVE

The objective of these tests was to determine the maximum output from the detonation of RDX explosive in terms of the peak airblast overpressure and positive impulse. The measured pressure and impulse data will be compared with known TNT test data to determine the equivalency of RDX explosive in relation to TNT.

EXPERIMENTAL METHODS

MATERIALS

The test material was RDX, high explosive, Batch No. 4RA59-217, Lot No. HOL 80A675-027. The explosive was received from Holston Army Ammunition Plant in standard shipping containers with a dry weight of 72.57 kg (160 lb) and a gross weight of approximately 113.4 kg (250 lb). The RDX was received and tested in the wet condition. The wetting agent was isopropyl alcohol.

TEST PLAN

Airblast output was evaluated for weights and configurations of RDX representing bulk RDX in a scaled down simulated Nutsche and a simulated drum. Physical characteristics of the test items are as follows:

- (1) A cylindrical container (figure 1a) with a charge weight of 22.68 kg (50 lb) of RDX was used to simulate the shipping drum with a dimensional scaling factor of 0.63. The container was constructed from fiberboard with a height of 42.93 cm (16.9 in) and a diameter of 29.22 cm (11.7 in).
- (2) A cylindrical container (figure 1b) with a charge weight of 45.36 kg (100 lb) of RDX was used to simulate the shipping drum with a dimensional scaling factor of 0.63. The container was constructed from fiberboard with a height of 53.34 cm (21.0 in) and a diameter of 37.34 cm (14.7 in).

(3) An orthorhombic container (figure 1c) with a charge weight of 27.22 kg (60 lb) of RDX was used to simulate the transfer container (Nutsche) with a dimensional scaling factor of 0.37. The container was constructed from plywood with dimensions of 46.74 cm (18.4 in) long by 29.97 cm (11.8 in) wide by 22.68 cm (9.0 in) high. The long side of the container was positioned facing the even gage line.

(4) An orthorhombic container (figure 1d) with a charge weight of 54.43 kg (120 lb) of RDX was used to simulate the transfer container (Nutsche) with a dimensional scaling factor of 0.46. The container was constructed from plywood with dimensions of 58.42 cm (23.0 in) long by 37.59 cm (14.8 in) wide by 27.94 cm (11.0 in) high. The long side of the container was positioned facing the even gage line.



Each test charge was initiated with a J2 blasting cap and a conically shaped booster of composition C4 high explosive. The weight of C4 used was 2 percent of the charge weight for each test. The C4 was shaped conically with an aspect ratio of 1:2 h/w. The C4 was centered on top of the RDX in the simulated Nutsche container and shipping drum and the blasting cap inserted at the apex and embedded to the center of the cone.

The test charge for each configuration was placed on a mild steel witness plate 1.27 cm (0.5 in) thick with the outside dimensions being 5.08 cm (2 in) larger than the base of the test configuration dimensions. Figure 2 shows the test area. The area was refurbished after each test subsequent to measurement of crater diameter and depth.

INSTRUMENTATION

Twelve PCB Piezotronics, Inc. side-on pressure transducers were mounted and placed at ground level in two 90° arrays within the test area shown in figure 2. Distances between the transducers and charge were calculated to correspond to scaled distances of 1.19, 1.59, 2.14, 3.57, 7.14 and 15.87 m/kg^{1/3} (3.0, 4.0, 5.4, 9.0, 18.0 and 40.0 ft/lb^{1/3}). The transducers were individually calibrated prior to each test series with quasi-static pressure pulses using a standard solenoid-actuated air pressure calibration fixture, adjusted to correspond to expected blast pressures based on an assumed TNT equivalency of 100%. Signal line continuity and channelization were checked prior to each test. Details of distances between charge and transducers, calibration pressures, and expected peak blast pressure at each distance are shown in table 1.

Before and after color still photographs were taken of each test setup and posttest configuration. Motion picture coverage consisted of a 16mm color movie (500 frames per second) for a single test of each test series and a documentary of 24 frames per second. Both cameras were pointed down the center line of the even gage line. Fiducial markers were positioned behind the test setup at 3.5 m (10 ft) intervals. Typical camera location and fiducial marker locations are shown in figure 3.

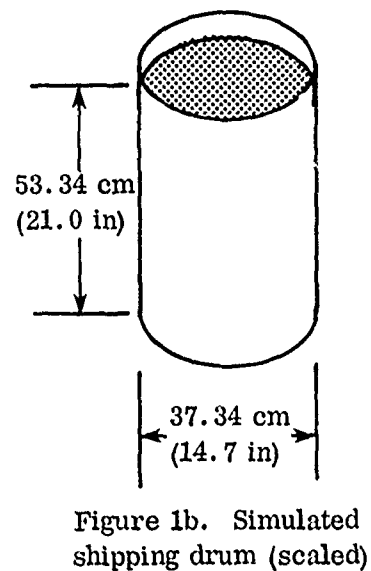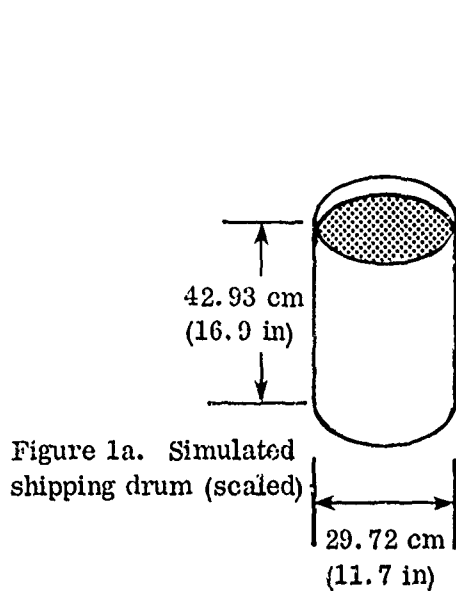

(Shaded area denotes approximate height of explosives in the drum or container.)

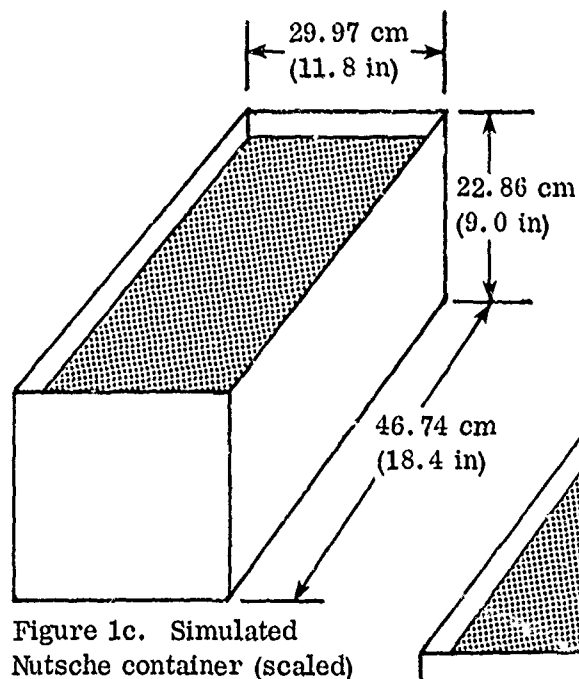


Figure 1d. Simulated Nutsche container (scaled)

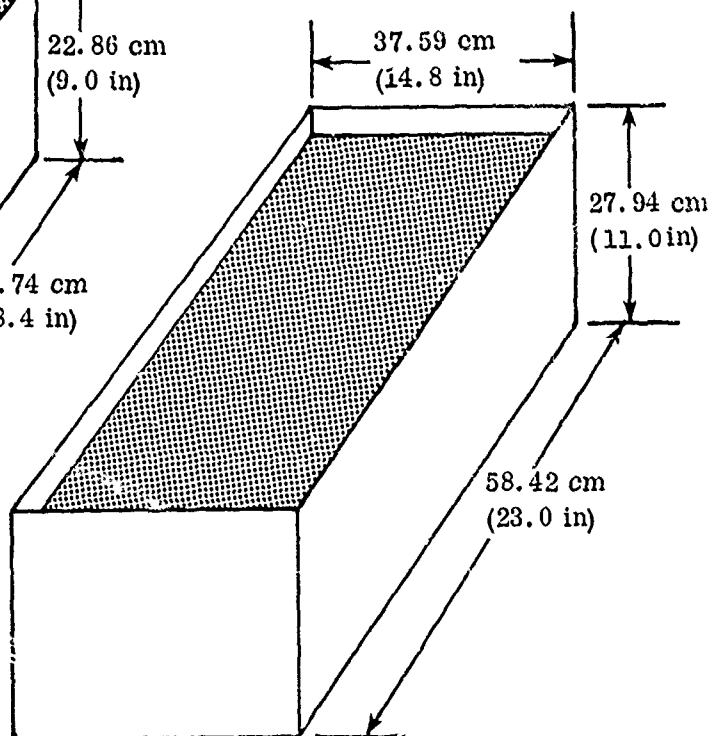


Figure 1. Test container configuration

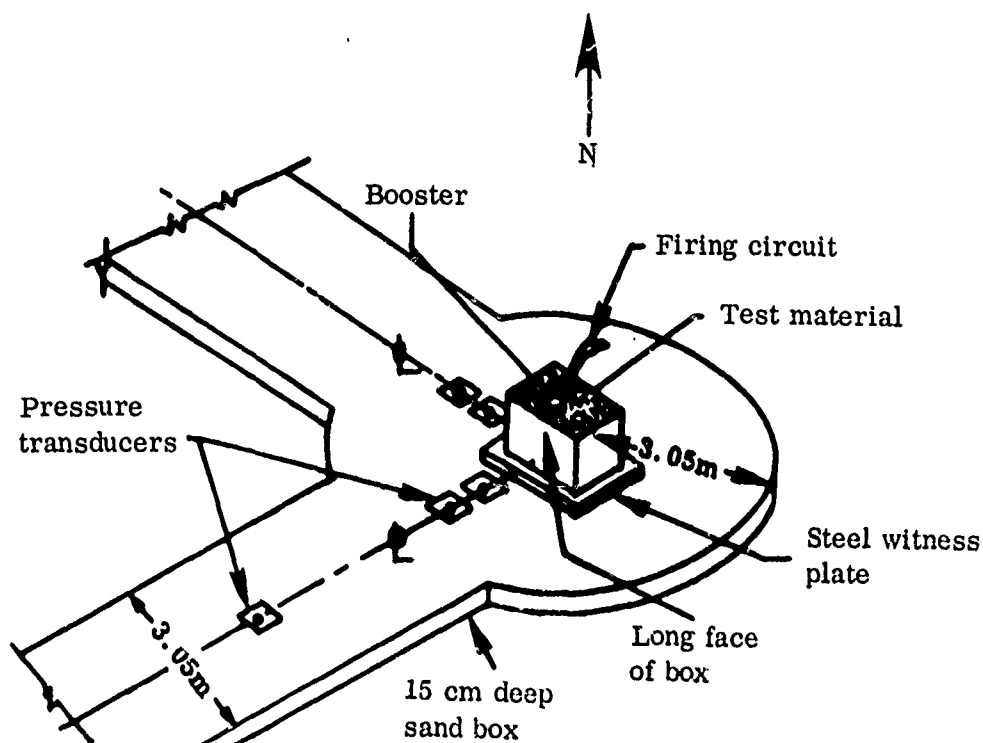


Figure 2. Typical charge placement for equivalency tests

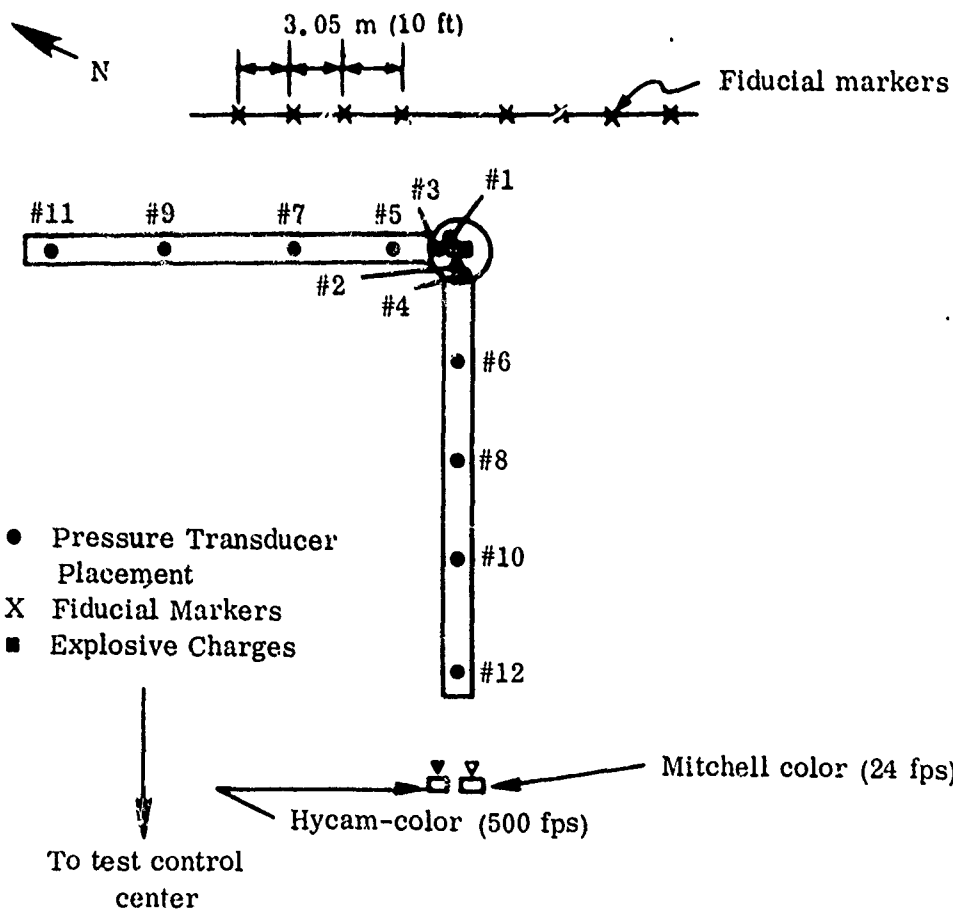


Figure 3. Test area showing transducer and camera placement

Table 1. Transducer calibration and placement

Channel number	Scaled distance m/kg ^{1/3} (ft/lb ^{1/3})	Full-Scale calibration pressure kPa (psi)	Expected pressure kPa (psi)	R ₁ distance in meters (ft) from charge			
				Charge weight 27.22 kg (60 lb)	Charge weight 54.43 kg (120 lb)	Charge weight 22.68 kg (50 lb)	Charge weight 45.36 kg (100 lb)
1	1.19	1034	922	3.58	4.51	3.37	4.24
2	(3.0)	(150)	(133.71)	(11.75)	(14.80)	(11.05)	(13.92)
3	1.59	517	480	4.77	6.01	4.49	5.66
4	(4.0)	(75)	(69.58)	(15.66)	(19.73)	(14.74)	(18.57)
5	2.14	345	243	6.44	8.12	6.06	7.64
6	(5.4)	(50)	(35.17)	(21.14)	(26.64)	(19.89)	(25.06)
7	3.57	103	81.5	10.74	13.53	10.11	12.73
8	(9.0)	(15)	(11.82)	(35.23)	(44.39)	(33.16)	(41.77)
9	7.14	34.5	24.07	21.48	27.06	20.21	25.47
10	(18.0)	(5)	(3.49)	(70.47)	(88.78)	(66.31)	(83.55)
11	15.87	34.5	8.14	47.73	60.14	44.92	56.59
12	(40.0)	(5)	(1.18)	(156.60)	(197.3)	(147.36)	(185.66)

RESULTS

DATA ANALYSIS

Peak blast overpressure and positive impulse information were obtained in digital form. Data that could be attributed to instrumentation or explosive malfunction were excluded. The mean and standard deviation were then obtained and all data which fell outside two standard deviations were excluded from the TNT equivalency calculations. The data were then compared to data from TNT Hemispheres.⁵ A computer program is employed which utilizes an iterative process that factors out the contribution of the booster charge weight and calculates the pressure and impulse equivalencies.⁶ The calculated TNT equivalencies were arranged in tabular form and also plotted as functions of sample scaled distance. The standard curve for TNT hemisphere reference data is shown in figure 4.

TEST RESULTS

Data sheets for all tests with pertinent measured parameters are given in Appendix A. Selected pretest and posttest still photographs are given in Appendix B. Test numbers shown are for local reference only and provide access to original range data files. Average pressure and scaled positive impulse are summarized by test configuration in tables 2 through 5 and figures 5, 7, 9, and 11. Plots of pressure and scaled impulse equivalency are given in figures 6, 8, 10, and 12. Deviation from cube root scaling is shown in figure 13. Fireball diameter and duration as measured from the high speed motion picture are given in table 6.

DISCUSSION

Plots of peak pressure and scaled positive impulse for the simulated shipping drum with a charge weight of 22.68 kg (50 lb) are shown in figure 5. The plots of TNT equivalencies for pressure and scaled impulse are shown in figure 6. Pressure values were greater than expected at all scaled distances. Pressure equivalency values were greater than 100% at all scaled distances. At a near-field value of $1.59 \text{ m/kg}^{1/3}$ ($4.0 \text{ ft/lb}^{1/3}$) the pressure equivalency was 413% for the highest value ranging to a low of 150% at $3.57 \text{ m/kg}^{1/3}$ ($9.0 \text{ ft/lb}^{1/3}$) and increasing to a value of 259% at the far-field value of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$). Scaled impulse values were greater than expected except at the far-field values of $\geq 7.14 \text{ m/kg}^{1/3}$ ($18 \text{ ft/lb}^{1/3}$). Scaled impulse equivalencies were greater than 100% at all scaled distances except at the far-field values of $\geq 7.14 \text{ m/kg}^{1/3}$ ($18 \text{ ft/lb}^{1/3}$). At a near-field value of $1.59 \text{ m/kg}^{1/3}$ ($4.0 \text{ ft/lb}^{1/3}$) the scaled impulse equivalency was 155% for the highest value ranging to a low of 54% at a scaled distance of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$).

Plots of peak pressure and scaled positive impulse for the simulated shipping drum with a charge weight of 45.36 kg (100 lb) are shown in figure 7. The plots of TNT equivalencies for pressure and scaled impulse are shown in figure 8. Pressure values were greater than expected at all scaled distances. Pressure equivalency values were greater

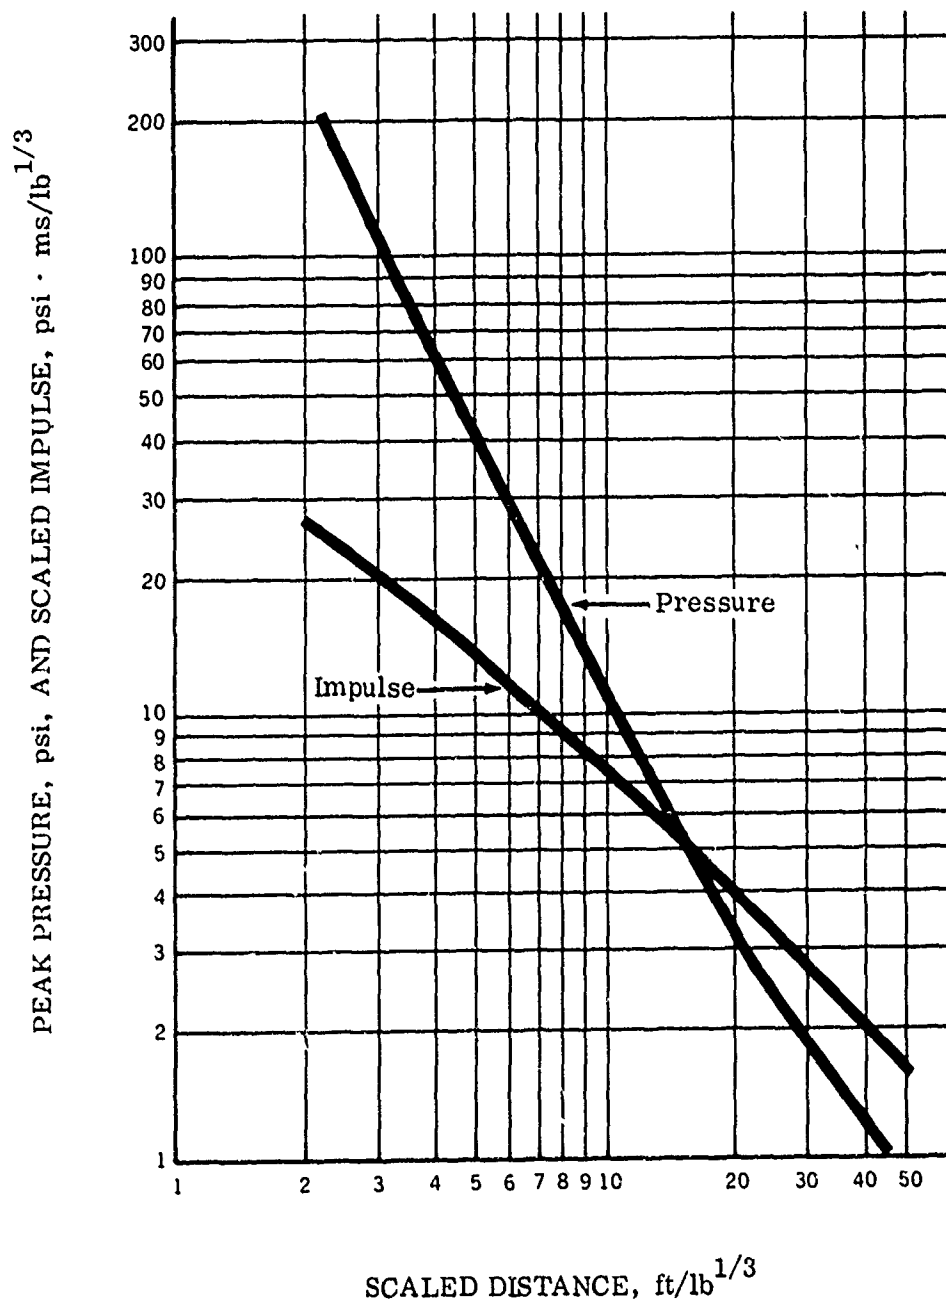


Figure 4. TNT hemisphere reference data.

than 100% at all scaled distances. At a near-field value of $1.59 \text{ m/kg}^{1/3}$ ($4.0 \text{ ft/lb}^{1/3}$) the pressure equivalency was 423% for the highest value ranging to a low of 147% at $3.57 \text{ m/kg}^{1/3}$ ($9.0 \text{ ft/lb}^{1/3}$) and increasing to a value of 244% at the far-field value of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$). Scaled impulse equivalencies were greater than 100% at all scaled distances except at a scaled distance of $3.57 \text{ m/kg}^{1/3}$ ($9.0 \text{ ft/lb}^{1/3}$) and at a scaled distance of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$). At a near-field value of $1.59 \text{ m/kg}^{1/3}$ ($4.0 \text{ ft/lb}^{1/3}$) the impulse equivalency was 126% for the highest value ranging to a low of 55% at a scaled distance of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$).

The plots of peak pressure and scaled impulse versus scaled distance for the simulated shipping drum for charge weights of 22.68 kg (50 lb) and 45.36 kg (100 lb) show the same general trend. Pressure and scaled impulse TNT equivalencies as a function of scaled distance are similar.

Plots of peak pressure and scaled positive impulse for the simulated Nutsche container with a charge weight of 27.22 kg (60 lb) are shown in figure 9. The plots of TNT equivalencies for pressure and scaled impulse are shown in figure 10. Pressure values were greater than expected at all scaled distances. Pressure equivalency values were greater than 100% at all scaled distances. At a near-field value of $1.59 \text{ m/kg}^{1/3}$ ($4.0 \text{ ft/lb}^{1/3}$) the pressure equivalency was 540% for the highest value ranging to a low of 116% at the far-field value of $7.14 \text{ m/kg}^{1/3}$ ($18.0 \text{ ft/lb}^{1/3}$) and increasing to a value of 223% at the far-field value of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$). Scaled impulse values were greater than expected except at the scaled distances of $3.57 \text{ m/kg}^{1/3}$ ($9.0 \text{ ft/lb}^{1/3}$) and $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$). At a near-field value of $2.14 \text{ m/kg}^{1/3}$ ($5.4 \text{ ft/lb}^{1/3}$) the impulse equivalency was 258% for the highest value ranging to a low of 67% at a scaled distance of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$).

Plots of peak pressure and scaled positive impulse for the simulated Nutsche container with a charge weight of 54.43 kg (120 lb) are shown in figure 11. The plots of TNT equivalencies for pressure and scaled impulse are shown in figure 12. Pressure values were greater than expected at all scaled distances. Pressure equivalency values were greater than 100% at all scaled distances. At a near-field value of $1.19 \text{ m/kg}^{1/3}$ ($3.0 \text{ ft/lb}^{1/3}$) the pressure equivalency was 526% for the highest value ranging to a low of 132% at the far-field value of $7.14 \text{ m/kg}^{1/3}$ ($18.0 \text{ ft/lb}^{1/3}$) and increasing to a value of 255% at the far-field value of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$). Scaled impulse values were greater than expected except at the scaled distance of $3.57 \text{ m/kg}^{1/3}$ ($9.0 \text{ ft/lb}^{1/3}$) and $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$). At a near-field value of $1.59 \text{ m/kg}^{1/3}$ ($4.0 \text{ ft/lb}^{1/3}$) the scaled impulse equivalency was 241% for the highest value ranging to a low of 39% at a scaled distance of $15.87 \text{ m/kg}^{1/3}$ ($40.0 \text{ ft/lb}^{1/3}$).

The plots of peak pressure and scaled impulse versus scaled distance for the simulated Nutsche container for charge weights of 27.22 kg (60 lb) and 54.43 kg (120 lb) show the same general trend. Pressure and scaled impulse TNT equivalencies as a function of scaled distance are similar.

Figure 13 is a graphic presentation of the deviation from cube root scaling for the 22.68 kg (50 lb), 45.36 kg (100 lb), 27.22 kg (60 lb), and 54.43 kg (120 lb) charge weights

Table 2. Summary of Test Results of 22.68 kg (50 lb) charge
simulated shipping drum scaled

Radius Meters (ft)	Scaled Distance $M/kg^{1/3}$ (ft/lb $^{1/3}$)	Peak Pressure kPa (psi)	Scaled Positive Impulse $kPa \cdot ms/kg^{1/3}$ (psi ms/lb $^{1/3}$)	Pressure TNT Equivalency %	Impulse TNT Equivalency %
3.37 (11.05)	1.19 (3.0)	2289 (331.91)	217 (24.16)	350	150
4.49 (14.74)	1.59 (4.0)	1350 (195.78)	177 (19.68)	413	155
6.06 (19.89)	2.14 (5.4)	427 (61.86)	119 (13.26)	210	120
10.11 (33.16)	3.57 (9.0)	108 (15.64)	87 (9.68)	150	144
20.21 (66.31)	7.14 (18.0)	35.1 (5.09)	28 (3.15)	200	70
44.92 (147.36)	15.87 (40.0)	12 (1.75)	11.8 (1.31)	259	54

Table 3. Summary of test results of 45.36 kg (100 lb) charge
simulated shipping drum scaled

Radius Meters (ft)	Scaled Distance $M/kg^{1/3}$ (ft/lb $^{1/3}$)	Peak Pressure kPa (psi)	Scaled Positive Impulse $kPa \cdot ms/kg^{1/3}$ (psi ms/lb $^{1/3}$)	Pressure TNT Equivalency %	Impulse TNT Equivalency %
4.24 (13.92)	1.19 (3.0)	2188 (317.25)	174 (19.41)	329	102
5.66 (18.57)	1.59 (4.0)	1390 (201.63)	156 (17.43)	423	126
7.64 (25.06)	2.14 (5.4)	474 (68.69)	118 (13.18)	246	120
12.73 (41.77)	3.57 (9.0)	105 (15.26)	59 (6.56)	147	77
25.47 (83.55)	7.14 (18.0)	30.5 (4.43)	37 (4.16)	156	102
56.59 (185.66)	15.87 (40.0)	12 (1.75)	11.7 (1.30)	244	55

Table 4. Summary of test results of 27.22 kg (60 lb) charge
simulated Nutsche container scaled

Radius Meters (ft)	Scaled Distance $M/kg^{1/3}$ (ft/lb $^{1/3}$)	Peak Pressure kPa (psi)	Scaled Positive Impulse $kPa \cdot ms/kg^{1/3}$ (psi ms/lb $^{1/3}$)	Pressure TNT Equivalency %	Impulse TNT Equivalency %
3.58 (11.745)	1.19 (3.0)	2941 (426.46)	206 (22.99)	493	135
4.77 (15.66)	1.59 (4.0)	1655 (240.04)	234 (26.02)	540	254
6.44 (21.14)	2.14 (5.4)	644 (93.39)	185 (20.76)	367	258
10.74 (35.234)	3.57 (9.0)	119 (17.24)	66 (7.39)	172	94
21.48 (70.468)	7.14 (18.0)	25.6 (3.72)	40 (4.49)	116	113
47.73 (156.595)	15.87 (40.0)	11.4 (1.65)	13 (1.45)	223	67

Table 5. Summary of test results of 54.43 kg (120 lb) charge
simulated Nutsche container scaled

Radius Meters (ft)	Scaled Distance $M/kg^{1/3}$ (ft/lb $^{1/3}$)	Peak Pressure kPa (psi)	Scaled Positive Impulse $kPa \cdot ms/kg^{1/3}$ (psi ms/lb $^{1/3}$)	Pressure TNT Equivalency %	Impulse TNT Equivalency %
4.51 (14.80)	1.19 (3.0)	3061 (444.00)	184 (20.48)	526	113
6.01 (19.73)	1.59 (4.0)	1608 (233.19)	230 (25.59)	515	241
8.12 (26.64)	2.14 (5.4)	620 (89.87)	174 (19.35)	316	232
13.53 (44.39)	3.57 (9.0)	106 (15.41)	58 (6.50)	148	75
27.06 (88.78)	7.14 (18.0)	27.7 (4.02)	37 (4.17)	132	107
60.14 (197.3)	15.87 (40.0)	12.1 (1.76)	9 (1.02)	255	39

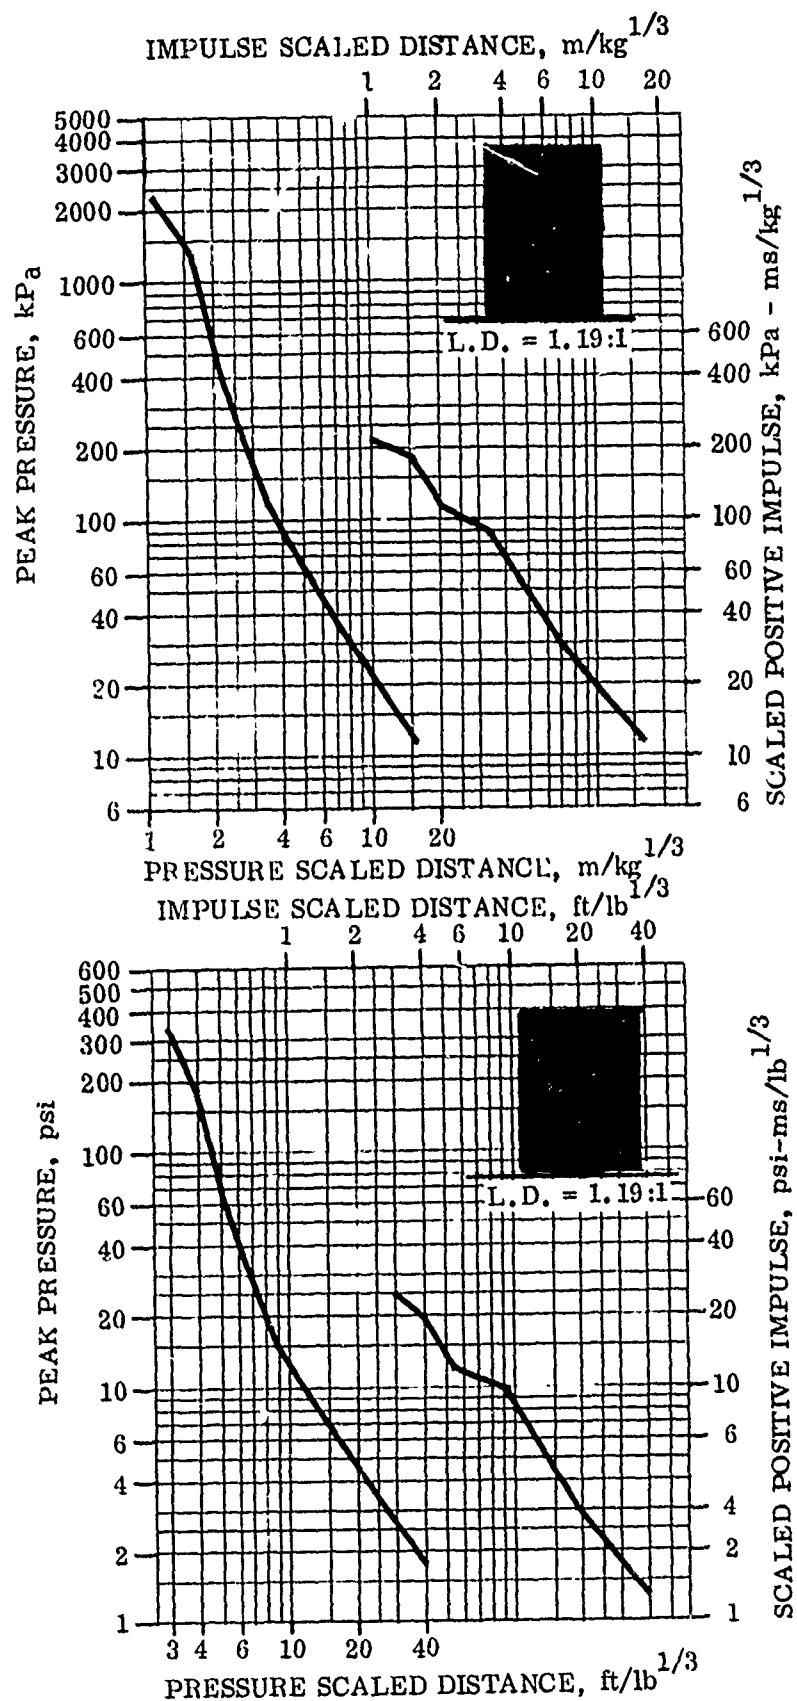


Figure 5. Pressure and impulse versus scaled distance for 22.68 kg (50 lb) charge simulated shipping drum scaled

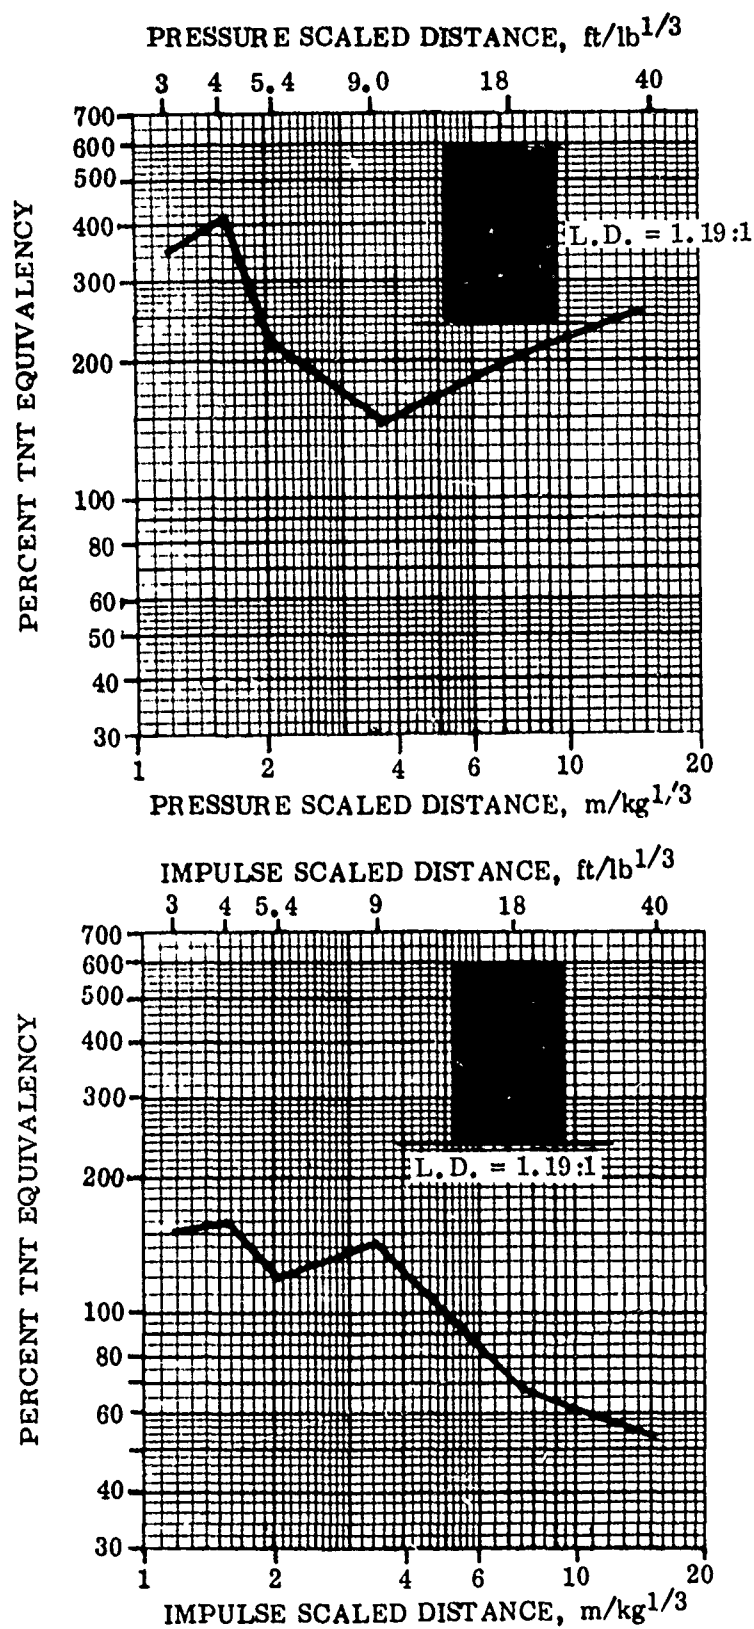


Figure 6. Pressure and impulse equivalencies for the 22.68 kg (50 lb) charge simulated shipping drum scaled

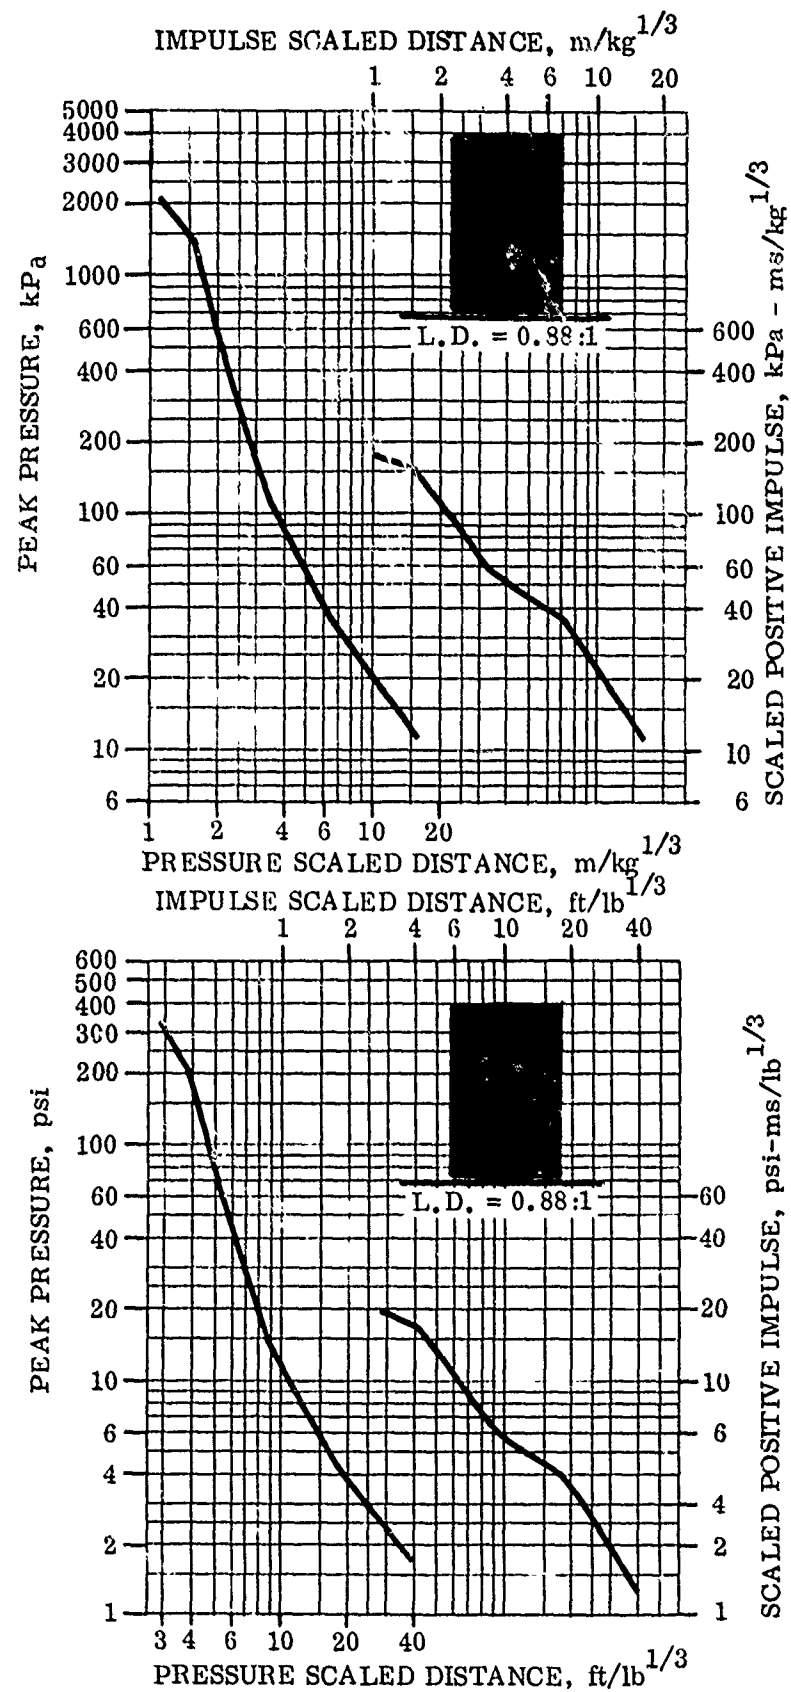


Figure 7. Pressure and impulse versus scaled distance for the 45.36 kg (100 lb) charge simulated shipping drum scaled

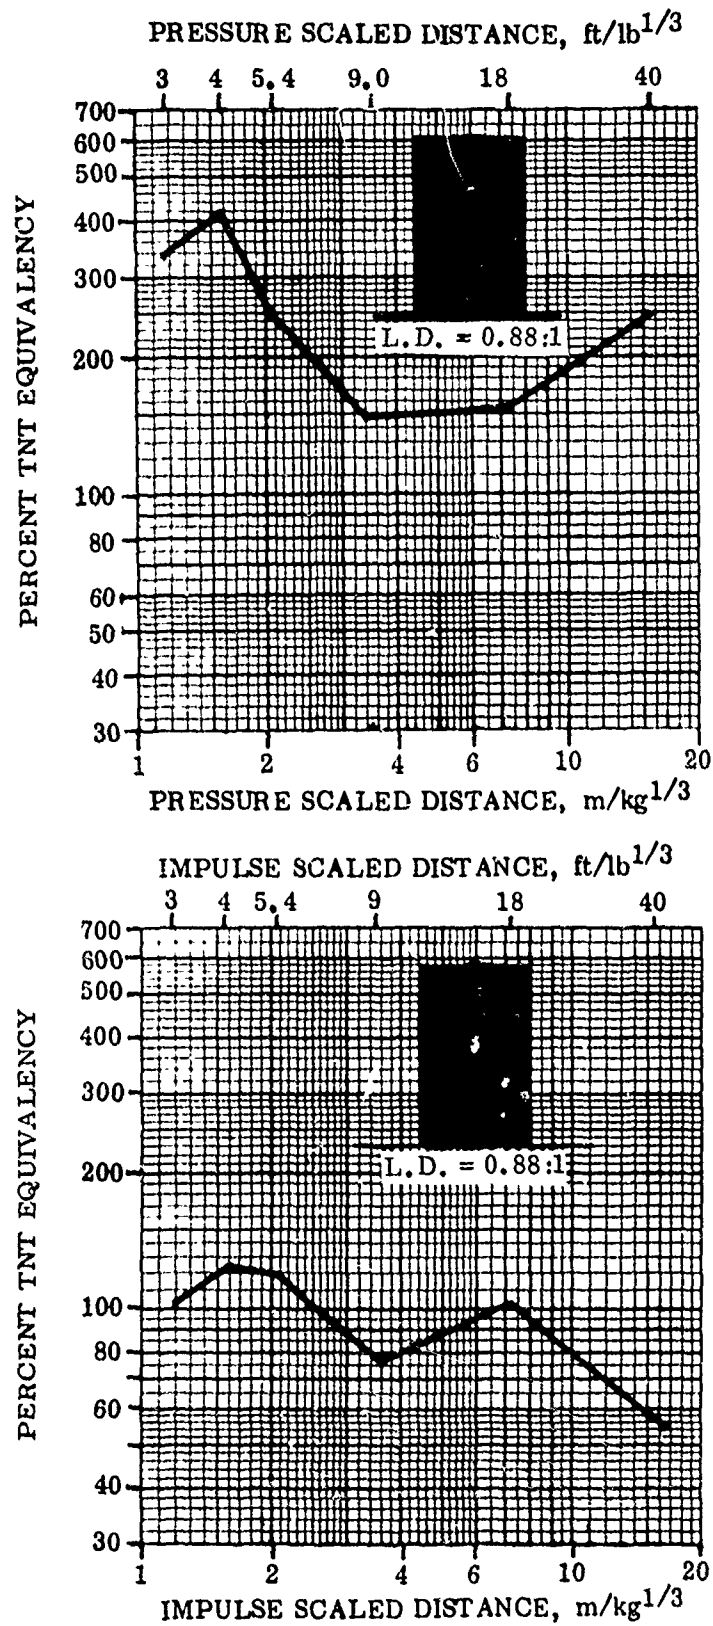


Figure 8. Pressure and impulse equivalencies for the 45.36 kg (100 lb) charge simulated shipping drum scaled

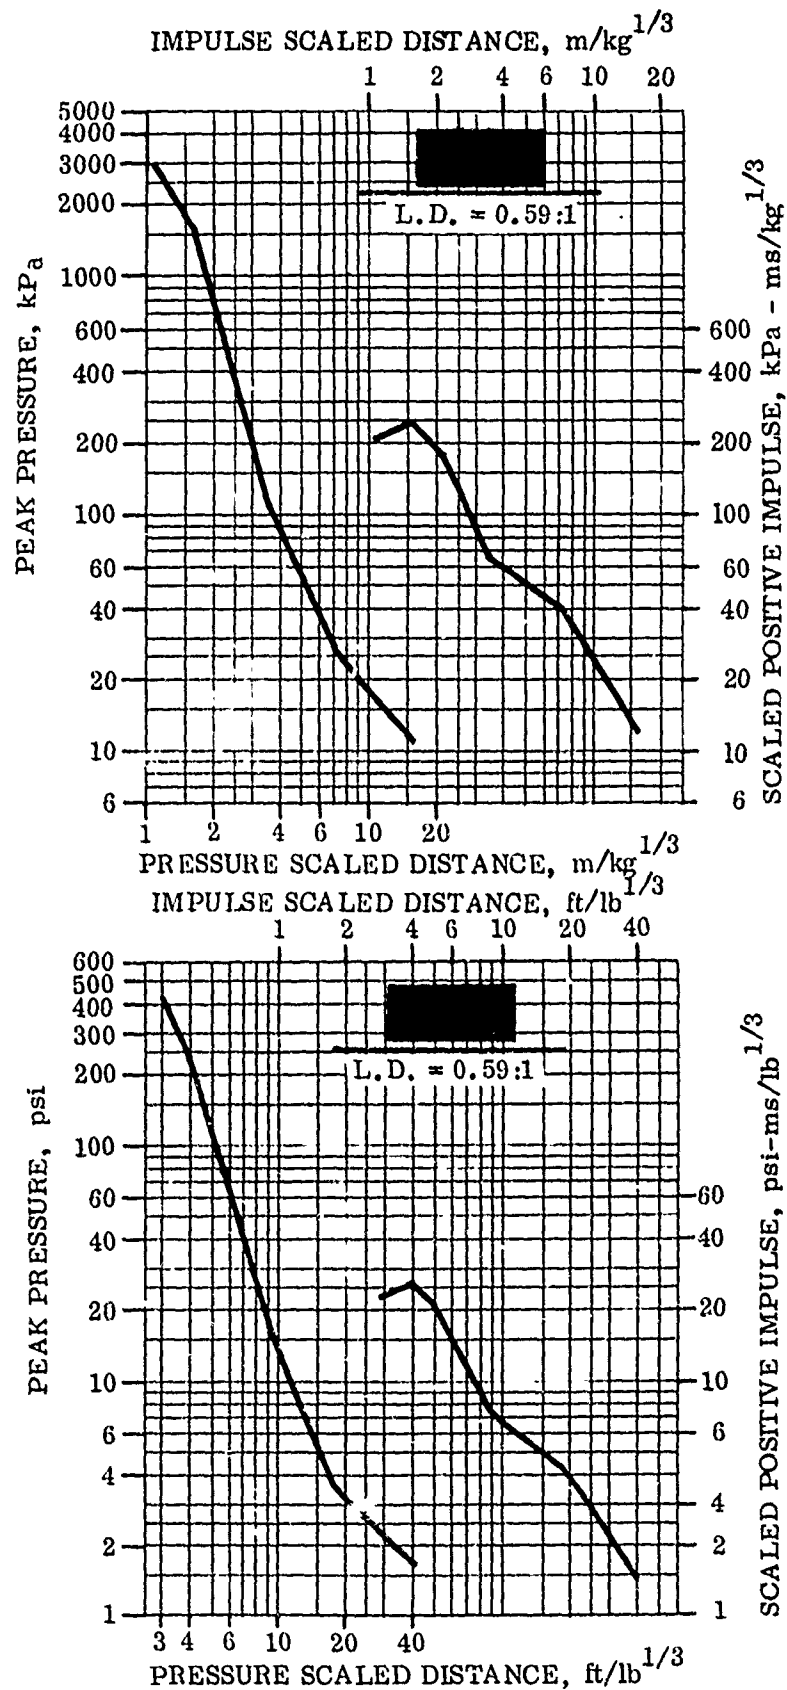


Figure 9. Pressure and impulse versus scaled distance for 27.22 kg (60 lb) charge simulated Nutsche container scaled

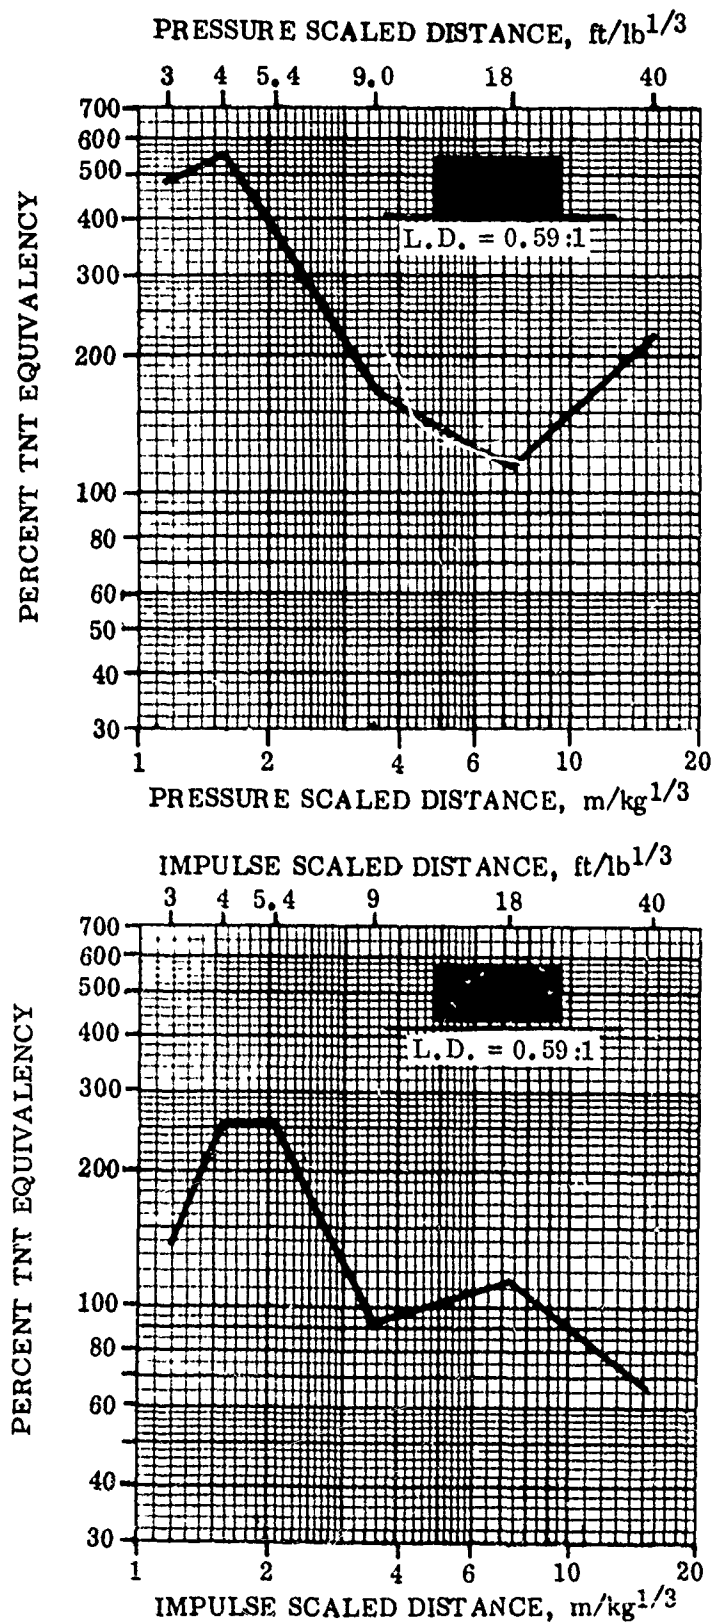


Figure 10. Pressure and impulse equivalencies for the 27.22 kg (60 lb) charge simulated Nutsche container scaled

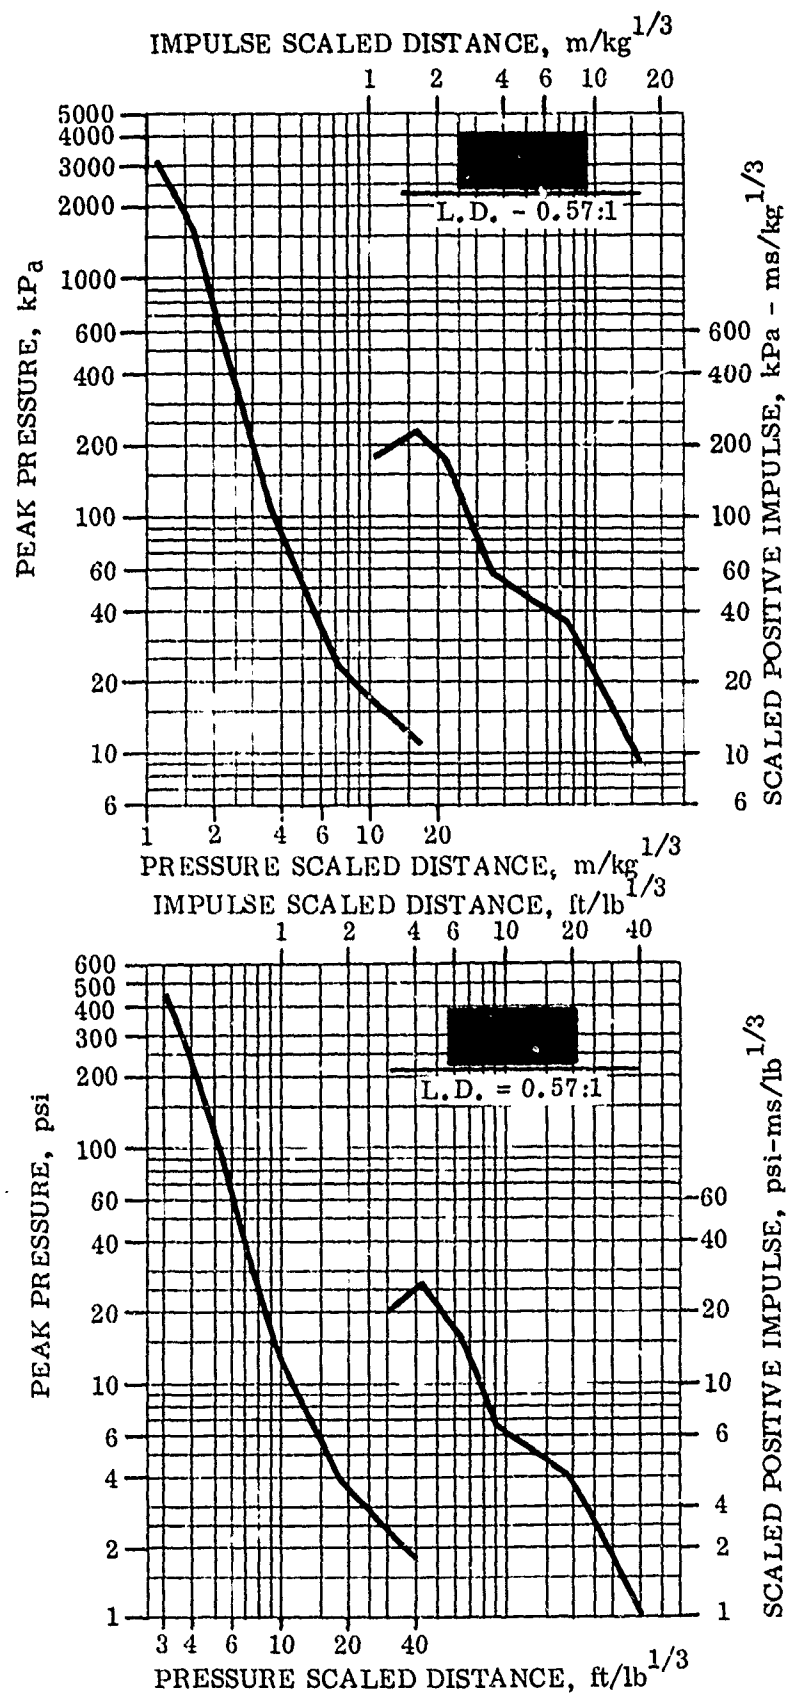


Figure 11. Pressure and impulse versus scaled distance for 54.43 kg (120 lb) charge simulated Nutsche container scaled

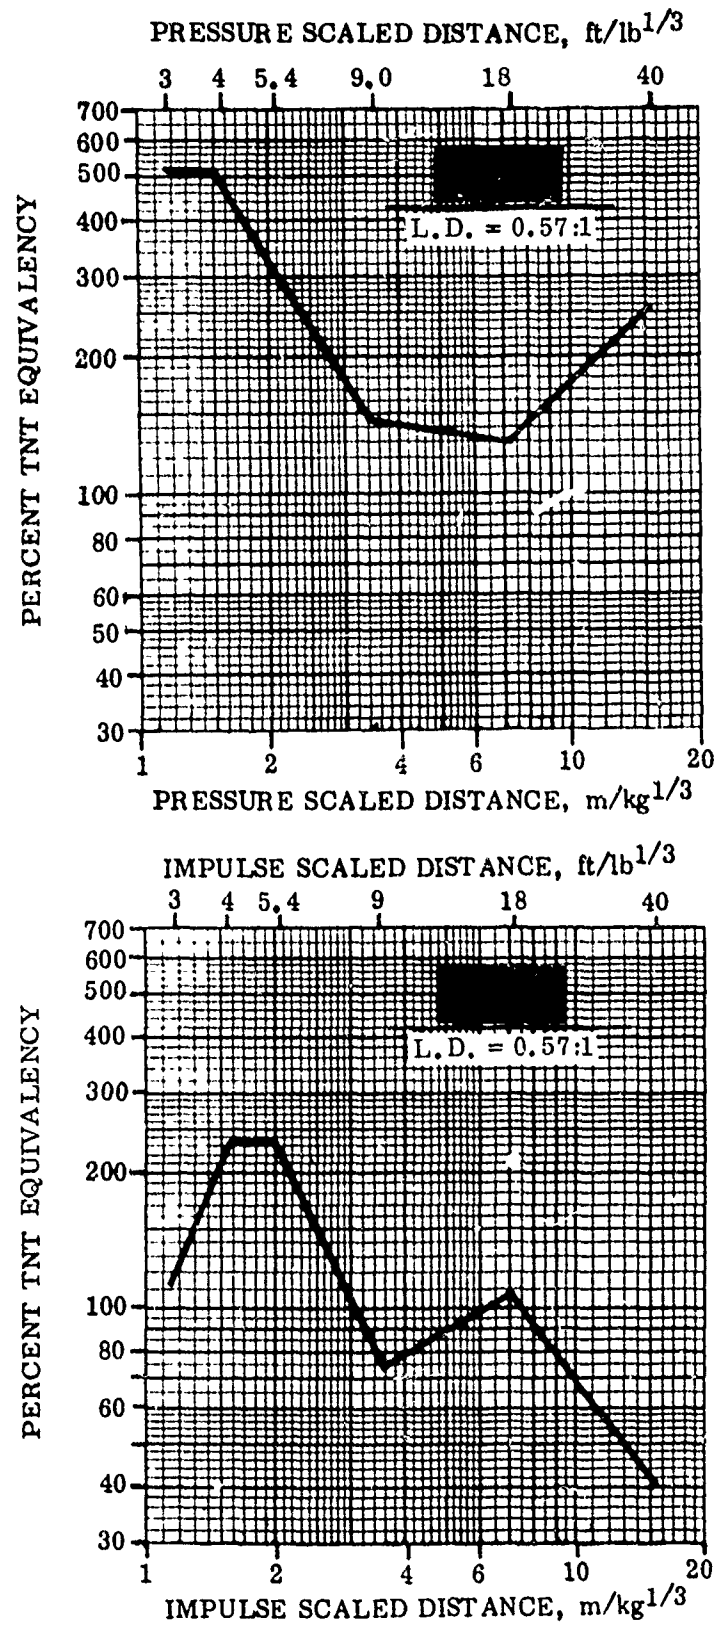


Figure 12. Pressure and impulse equivalencies for the 54.43 kg (120 lb) charge simulated Nutsche container scaled

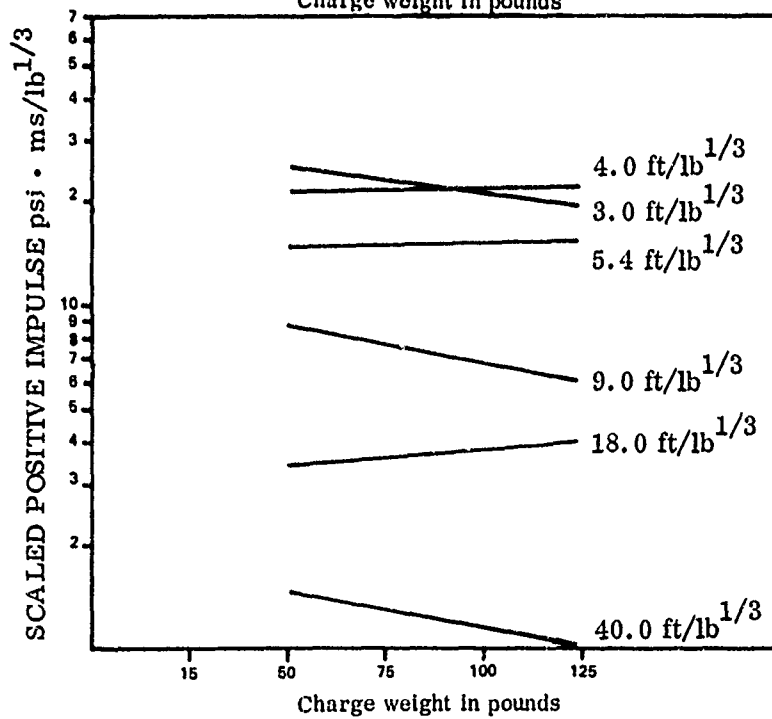
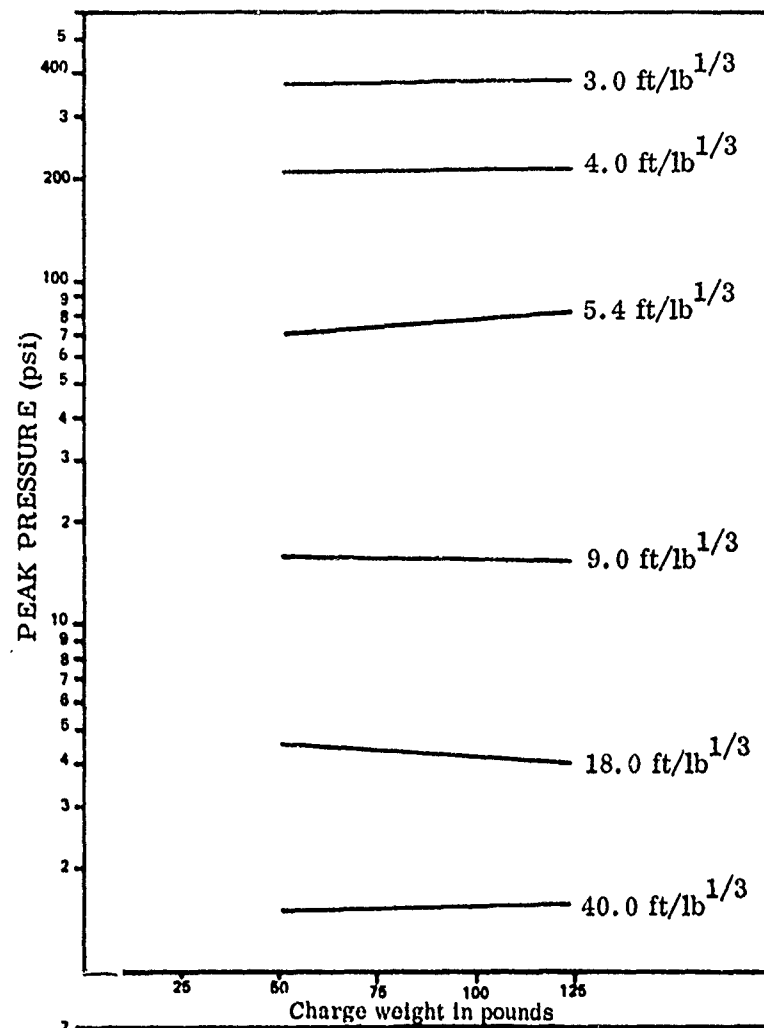


Figure 13. Deviation from cube root scaling

Table 6. Fireball diameter and duration

Charge Weight kg (lb)	Maximum Fireball Diameter meters (ft)	Fireball Duration msec
22.68 kg (50 lb) Simulated shipping drum	13.1 m (43 ft)	102
45.36 kg (100 lb) Simulated shipping drum	22.9 m (75 ft)	97
27.22 kg (60 lb) Simulated Nutsche container	21.3 m (70 ft)	170
54.43 kg (120 lb) Simulated Nutsche container	25.9 m (85 ft)	232

for pressure and impulse. Specifically, TNT hemispherical data scales as a slope of one at all charge weights. An increase in pressure with increasing charge weights will be indicated by a positive slope. A decrease in pressure with increasing charge weights is indicated by a negative slope. Generally, an explosive can be said to scale as a function of the cube root of the charge weight when the slope of the line is no greater than 1.000 (+ 0.001) from the mean. To within experimental error limits of the tests, RDX explosive scales as a function of the cube root of the charge weights.

CONCLUSIONS

- (1) RDX, when detonated, can generate peak pressure and positive impulse values which are greater than those produced from an equivalent weight of TNT.
- (2) The blast output from RDX is dependent upon the configuration from which it detonates.
- (3) TNT equivalency values were determined for RDX in two configurations that simulate in-plant processing and shipping containers.
- (4) To within experimental limits, blast pressure and impulse scale as a cube root function of the charge weight.

RECOMMENDATIONS

In order to design meaningful experiments and for the resulting data to be intelligently applied, it is important that the many factors and parameters that affect the airblast be recognized, and that the data be used in the context in which they were derived.


REFERENCES

1. McIntyre, F. L., TNT Equivalency of Composition C-4 in shipping and Process Containers, Feb 81 ARLCD-CR-80061.
2. McIntyre, F. L., TNT Equivalency of Composition A3, Dec 1981 ARLCD-CR-81044.
3. Wisotski, John and Snyder, W. H., Characteristics of Blast Waves Obtained from Cylindrical High Explosive Charges, Denver Research Institute, November 1965.
4. Tancreto, J. E., TNT Equivalencies of RDX Slurry and Various Geometries of Composition B, Preliminary Report, Picatinny Arsenal, Dover, NJ, May 1975.
5. Kingery, C. N., Airblast Parameters Versus Distance for Hemispherical TNT Surface Bursts, BRL Report No. 1344, September 1966.
6. McKown, G. L., TNT Equivalency of R284 Tracer Composition, I559, Igniter Mix, and I560 Subigniter Mix, ARLCD-TR-79026, Picatinny Arsenal, Aug 1979.

APPENDIX A
TEST DATA SHEETS

PRECEDING PAGE BLANK-NOT FILMED


TEST TITLE TNT EQUIVALENCY DATE 6 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1309
 SAMPLE WEIGHT 22.68 kg (50 lb) TEMP. 18.9°C (66°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 60%
 BOOSTER WT. 0.4536 kg (1.0 lb) BAR. PRESS. 30.12
 TEST NO. 10-80-C1 WIND DIR. 150
 CONTRACT NO. NAS13-50 WIND VEL. 0 knots

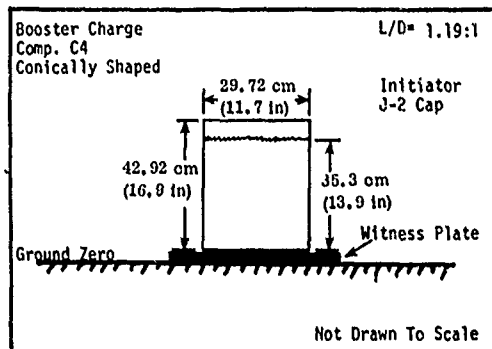

FIELD EVALUATION: Detonation occurred, no unreacted
explosive. Crater size 50.3 cm by 233.7 cm (1 ft 8 in x 7 ft 8 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	3.37	2275 (329.87)	216.03 (24.07)	1.6
2	(11.05)	-	-	-
3	4.49	998 (144.76)	173.8 (19.37)	2.6
4	(14.74)	-	-	-
5	6.06	433 (62.75)	121.3 (13.52)	4.7
6	(19.89)	511 (74.15)	130.4 (14.53)	4.7
7	10.11	115 (16.64)	96.3 (10.73)	12.0
8	(33.16)	129 (18.67)	95.4 (10.63)	12.0
9	20.21	39 (5.67)	14.6 (1.63)	36.5
10	(66.31)	31 (4.524)	43.8 (4.88)	36.7
11	44.92	15 (2.11)	11.7 (1.30)	105.7
12	(147.36)	10 (1.44)	12.0 (1.34)	106.5


TEST TITLE TNT EQUIVALENCY DATE 6 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1351
 SAMPLE WEIGHT 22.68 kg (50 lb) TEMP. 19.4°C (67°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 60%
 BOOSTER WT. 0.4536 kg (1.0 lb) BAR. PRESS. 30.11
 TEST NO. 10-80-C2 WIND DIR. 153
 CONTRACT NO. NAS13-50 WIND VEL. 0-2 knots

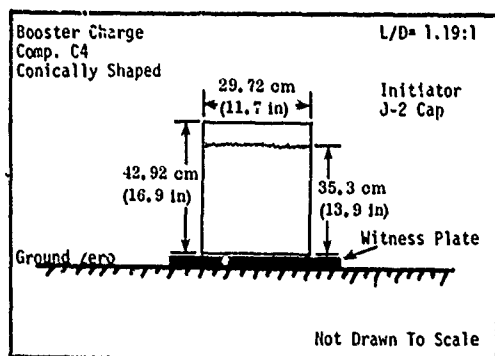

FIELD EVALUATION: Detonation occurred, no unreacted
explosive. Crater size 53.3 cm by 233. cm (1 ft 9 in x 7 ft 8 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	3.37	2298 (333.20)	268 (29.86)	2.9
2	(11.05)	1960 (284.26)	152 (16.94)	2.8
3	4.49	962 (139.50)	184.5 (20.56)	3.7
4	(14.74)	1896 (275.00)	145 (16.16)	3.6
5	6.06	529 (76.69)	121.8 (13.57)	5.7
6	(19.89)	289 (41.91)	108.7 (12.11)	5.9
7	10.11	95 (13.73)	88.6 (9.87)	13.5
8	(33.16)	126 (18.30)	95.7 (10.66)	13.5
9	20.21	40 (5.73)	15.5 (1.73)	37.8
10	(66.31)	33 (4.84)	42.4 (4.72)	37.8
11	44.92	15 (2.11)	12.1 (1.35)	102.7
12	(147.36)	9 (1.35)	11.0 (1.23)	103.8


TEST TITLE TNT Equivalency DATE 6 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1432
 SAMPLE WEIGHT 22.68 kg (50 lb) TEMP. 20°C (68°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 61%
 BOOSTER WT. 0.4536 kg (1.0 lb) BAR. PRESS. 30.10
 TEST NO. 10-80-C3 WIND DIR. 200
 CONTRACT NO. NAS13-50 WIND VEL. 0-2 knots

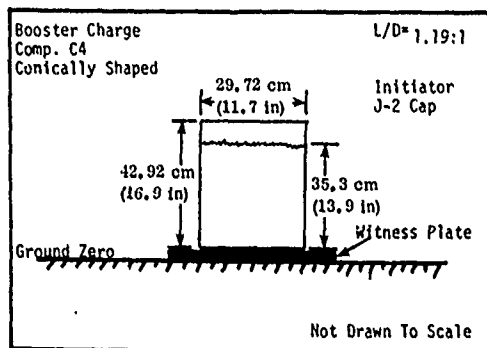

FIELD EVALUATION: Detonation occurred, no unreacted explosive. Crater size 50.8 cm by 233.7 cm (1 ft 8 in x 7 ft 8 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	3.37	2298 (333.2)	277.8 (30.96)	1.5
2	(11.05)	2614 (379.01)	237.7 (26.48)	1.4
3	4.49	1670 (242.14)	203.3 (22.65)	2.2
4	(14.74)	1224 (177.5)	-	2.2
5	6.06	409 (59.26)	116.1 (12.94)	4.2
6	(19.89)	389 (56.42)	115.8 (12.90)	4.0
7	10.11	92 (13.31)	74.6 (8.31)	12.0
8	(33.16)	91 (13.18)	70.0 (7.80)	11.5
9	20.21	38 (5.51)	15.8 (1.76)	36.7
10	(66.31)	29 (4.21)	37.4 (4.17)	36.4
11	44.92	15 (2.24)	12.0 (1.34)	101.7
12	(147.36)	9 (1.26)	4.8 (.53)	102.3


TEST TITLE TNT EQUIVALENCY DATE 7 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1315
 SAMPLE WEIGHT 27.22 kg (60 lb) TEMP. 22.8°C (73°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 82%
 BOOSTER WT. 0.544 kg (1.2 lb) BAR. PRESS. 30.10
 TEST NO. 10-80-C4 WIND DIR. 160
 CONTRACT NO. NAS13-50 WIND VEL. 2-8 knots

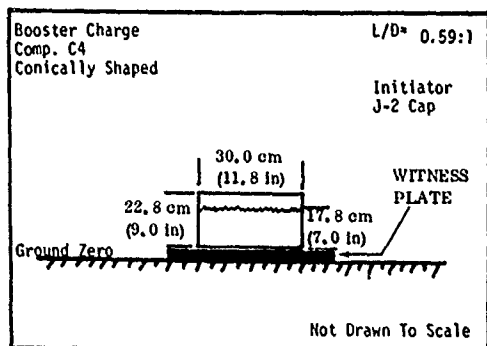

FIELD EVALUATION: Detonation occurred, no unreacted explosive. Crater size 63.5 cm by 256.5 cm (2 ft 1 in x 8 ft 5 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	3.58	3150.7 (456.96)	203.5 (22.67)	1.3
2	(11.745)	3102.8 (450.0)	220.6 (24.58)	1.0
3	4.77	1483 (215.0)	209.6 (23.35)	2.0
4	(15.66)	1946 (282.24)	224.6 (25.02)	1.8
5	6.44	603 (87.5)	150.1 (16.72)	4.0
6	(21.14)	628 (91.08)	-	-
7	10.74	97 (14.04)	52.7 (5.87)	12.3
8	(35.234)	145 (21.06)	82.4 (9.18)	10.7
9	21.48	25 (3.59)	30 (3.34)	39.0
10	(70.468)	28 (4.08)	29.8 (3.32)	37.0
11	47.73	14.56 (2.112)	7.8 (0.87)	108.5
12	(156.595)	10 (1.38)	20.0 (2.23)	107.2


TEST TITLE TNT Equivalency DATE 7 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1405
 SAMPLE WEIGHT 27.22 kg (60 lb) TEMP. 22.8°C (73°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 77%
 BOOSTER WT. 0.544 kg (1.2 lb) BAR. PRESS. 30.10
 TEST NO. 10-80-C5 WIND DIR. 160
 CONTRACT NO. NAS13-50 WIND VEL. 10-18 knots

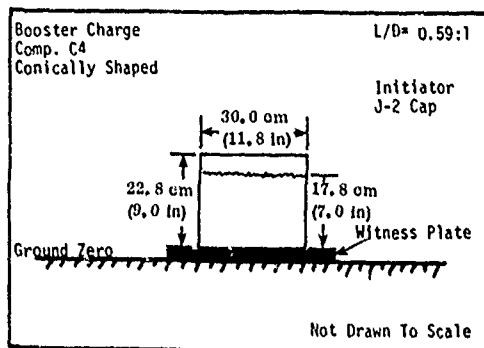

FIELD EVALUATION: Detonation occurred, no unreacted
explosive. Crater size 73.7 in x 24.6 cm (2 ft 5 in x 8 ft 1 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	3.58	2954 (428.4)	223.4 (24.89)	1.9
2	(11.745)	3413 (495.00)	-	2.0
3	4.77	1552 (225.00)	199.8 (22.26)	2.6
4	(15.66)	1825 (264.60)	247.5 (27.58)	2.6
5	6.44	543 (78.75)	151.0 (16.83)	4.6
6	(21.14)	728 (105.60)	232.1 (25.86)	4.6
7	10.74	116 (16.85)	43.0 (4.79)	12.8
8	(35.234)	132 (19.19)	76.5 (8.52)	11.9
9	21.48	24 (3.45)	48.0 (5.35)	39.1
10	(70.468)	29 (4.22)	46.4 (5.17)	37.8
11	47.73	14.5 (2.112)	7.6 (0.85)	109.1
12	(156.595)	8 (1.17)	18.8 (2.09)	107.9


TEST TITLE TNT Equivalency DATE 7 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1538
 SAMPLE WEIGHT 27.22 kg (60 lb) TEMP. 23.3°C (74°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 80%
 BOOSTER WT. 0.544 kg (1.2 lb) BAR. PRESS. 30.10
 TEST NO. 10-80-C6 WIND DIR. 180
 CONTRACT NO. NAS13-50 WIND VEL. 3-12 knots

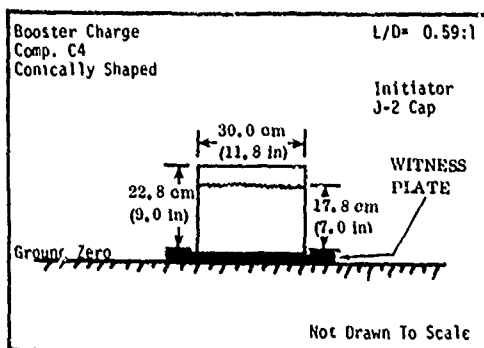

FIELD EVALUATION: Detonation occurred, no unreacted
explosive. Crater size 66.0 cm x 248.9 cm (2 ft 2 in x 8 ft 2 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	3.58	2954 (428.40)	209.3 (23.32)	1.3
2	(11.745)	2069 (300.00)	175.0 (19.50)	1.4
3	4.77	1103 (160.00)	149.9 (16.71)	2.1
4	(15.66)	2027 (292.00)	369.7 (41.19)	2.2
5	6.44	560 (81.25)	161.6 (18.01)	4.0
6	(21.14)	801 (116.16)	236.9 (26.40)	3.5
7	10.74	87 (12.64)	-	12.3
8	(35.234)	136 (19.66)	77.1 (8.59)	10.5
9	21.48	24 (3.45)	45.0 (5.02)	39.5
10	(70.468)	24 (3.54)	42.5 (4.73)	37.3
11	47.73	12 (1.72)	10.9 (1.21)	109.4
12	(156.595)	9.5 (1.378)	-	107.8


TEST TITLE TNT Equivalency DATE 8 Mar 80
 TEST SAMPLE ROX (98/2) TIME 0901
 SAMPLE WEIGHT 45.36 kg (100 lb) TEMP. 25°C (77°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 54%
 BOOSTER WT. 0.907 kg (2.0 lb) BAR. PRESS. 29.94
 TEST NO. 10-80-C7 WIND DIR. 345
 CONTRACT NO. NAS13-50 WIND VEL. 0-1 knots

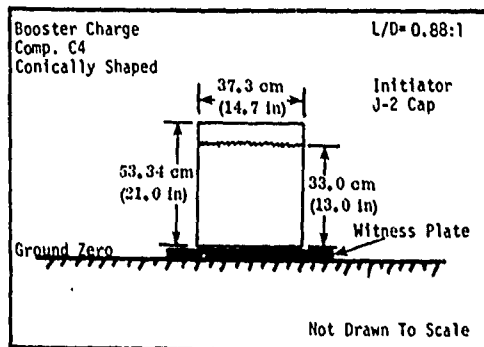

FIELD EVALUATION: Detonation occurred, no unreacted explosive. Crater size 76.2 cm x 335.3 cm (2 ft 6 in x 11 ft 0 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	4.24	2069 (300.00)	171.1 (19.06)	2.6
2	(13.92)	2534 (367.5)	173.7 (19.35)	2.8
3	5.66	1451 (210.4)	153.6 (17.11)	3.5
4	(18.57)	1668 (241.96)	143.4 (15.98)	3.6
5	7.64	559 (81.00)	-	5.0
6	(25.06)	420 (60.9)	97.0 (10.81)	5.3
7	12.73	-	-	14.8
8	(41.77)	139 (20.12)	75.1 (8.37)	15.0
9	25.47	30 (4.40)	51.3 (5.72)	46.1
10	(83.55)	31.4 (4.557)	38.0 (4.23)	46.1
11	56.59	11.2 (1.625)	10.1 (1.12)	128.2
12	(185.66)	14.4 (2.09)	-	129.0


TEST TITLE TNT Equivalency DATE 8 Mar 80
 TEST SAMPLE ROX (98/2) TIME 1003
 SAMPLE WEIGHT 45.36 kg (100 lb) TEMP. 26.7°C (80°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 54%
 BOOSTER WT. 0.907 kg (2.0 lb) BAR. PRESS. 29.94
 TEST NO. 10-80-C8 WIND DIR. 025
 CONTRACT NO. NAS13-50 WIND VEL. 0-1 knots

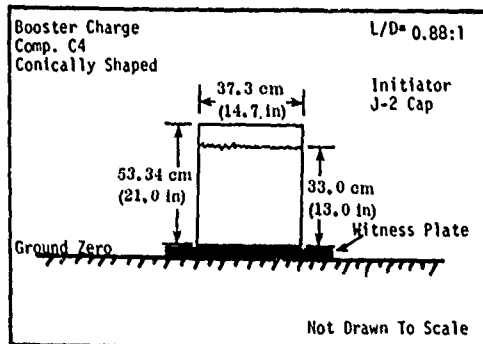

FIELD EVALUATION. Detonation occurred, no unreacted explosive. Crater size 78.7 cm x 325.1 cm (2 ft 7 in x 10 ft 8 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	4.24	1903 (276.00)	195.2 (21.75)	2.4
2	(13.92)	2327 (337.50)	206.8 (23.04)	2.4
3	5.66	1197 (173.58)	162.4 (18.09)	3.2
4	(18.57)	1451 (210.40)	-	3.1
5	7.64	642 (93.15)	129.9 (14.47)	5.7
6	(25.06)	294 (42.63)	103.6 (11.54)	5.6
7	12.73	124 (17.98)	48.3 (5.38)	5.8
8	(41.77)	97 (14.12)	-	5.2
9	25.47	27 (3.976)	43.8 (4.88)	46.0
10	(83.55)	36 (5.25)	34.8 (3.88)	47.4
11	56.59	10.3 (1.50)	7.0 (0.78)	128.0
12	(185.66)	12 (1.74)	15.7 (1.75)	130.1


TEST TITLE TNT Equivalency DATE 8 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1044
 SAMPLE WEIGHT 45.36 kg (100 lb) TEMP. 27.2°C (81°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 53%
 BOOSTER WT. 0.907 kg (2.0 lb) BAR. PRESS. 29.94
 TEST NO. 10-80-C9 WIND DIR. 033
 CONTRACT NO. NAS13-50 WIND VEL. 0-1 knots

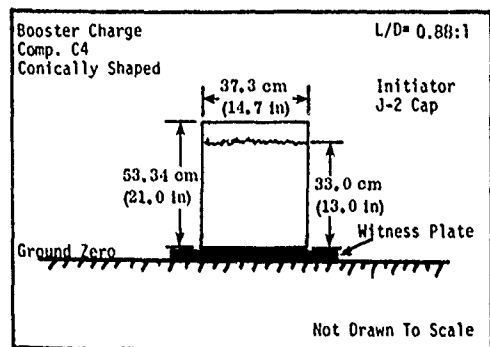

FIELD EVALUATION: Detonation occurred, no unreacted explosive. Crater size 66.0 cm x 284.5 cm (2 ft 2 in x 9 ft 4 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	4.24	2482 (360.0)	158.7 (17.68)	2.9
2	(13.92)	1810 (262.5)	140 (15.60)	2.8
3	5.66	1306 (189.36)	154.6 (17.23)	3.9
4	(18.57)	1269 (184.1)	168.4 (18.76)	3.6
5	7.64	633 (91.8)	137.9 (15.37)	5.7
6	(25.06)	294 (42.63)	122.6 (13.66)	5.6
7	12.73	133 (19.26)	47.1 (5.25)	6.6
8	(41.77)	92 (13.27)	-	8.0
9	25.47	29 (4.26)	22.3 (2.49)	46.7
10	(83.55)	28 (4.12)	33.8 (3.77)	47.2
11	56.59	13 (1.83)	14.2 (1.58)	128.5
12	(185.66)	12 (1.74)	11.5 (1.28)	129.5


TEST TITLE TNT Equivalency DATE 8 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1229
 SAMPLE WEIGHT 54.43 kg (120 lb) TEMP. 27.8°C (82°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 52%
 BOOSTER WT. 1.088 kg (2.4 lb) BAR. PRESS. 29.93
 TEST NO. 10-80-C10 WIND DIR. 140
 CONTRACT NO. NAS13-50 WIND VEL. 0-1 knots

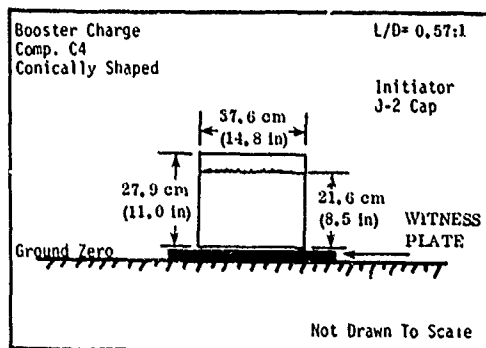

FIELD EVALUATION: Detonation occurred, no unreacted explosive. Crater size 73.7 cm x 320.0 cm (2 ft 5 in x 10 ft 6 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	4.51	2854.8 (414.00)	188.6 (21.01)	2.4
2	(14.80)	3568 (517.50)	223.4 (24.89)	1.5
3	6.01	1632 (236.70)	219.2 (24.42)	3.9
4	(19.73)	1523 (220.92)	291.8 (32.51)	3.8
5	8.12	623.7 (90.45)	122.3 (13.63)	6.2
6	(26.64)	-	-	-
7	13.53	76.7 (11.13)	51.1 (5.69)	16.4
8	(44.39)	76.7 (11.13)	29.7 (3.31)	14.8
9	27.06	25.4 (3.69)	62.8 (7.00)	50.0
10	(88.78)	31.3 (4.54)	41.6 (4.64)	47.7
11	60.14	14.3 (2.07)	7.1 (0.79)	138.0
12	(197.3)	8.5 (1.23)	16.7 (1.86)	135.8


TEST TITLE TNT Equivalency DATE 8 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1312
 SAMPLE WEIGHT 54.43 kg (120 lb) TEMP. 27.2°C (81°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 50%
 BOOSTER WT. 1.088 kg (2.4 lb) BAR. PRESS. 29.93
 TEST NO. 10-80-C11 WIND DIR. 110
 CONTRACT NO. NAS13-50 WIND VEL. 0-1 knots

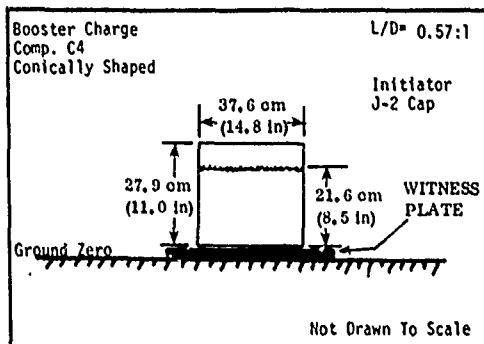

FIELD EVALUATION: Detonation occurred, no unreacted explosive. Crater size 73.7 cm x 312.4 cm (2 ft 5 in x 10 ft 3 in)

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	4.51	1862 (270.00)	179 (19.95)	1.2
2	(14.80)	3103 (450.00)	224.8 (25.05)	1.2
3	6.01	1342 (194.62)	162.5 (18.11)	2.0
4	(19.73)	1632 (236.70)	271.3 (30.23)	2.1
5	8.12	614 (89.10)	157 (17.49)	4.3
6	(26.64)	605 (87.70)	193.5 (21.56)	4.2
7	13.53	127 (18.40)	55.6 (6.19)	14.6
8	(44.39)	127 (18.40)	67.0 (7.47)	12.8
9	27.06	22.5 (3.27)	17.2 (1.92)	48.8
10	(88.78)	31.3 (4.54)	35.4 (3.94)	45.9
11	60.14	14.3 (2.07)	6.3 (0.70)	137.4
12	(197.3)	23.5 (3.41)	7.5 (0.84)	133.7


TEST TITLE TNT Equivalency DATE 8 Mar 80
 TEST SAMPLE RDX (98/2) TIME 1350
 SAMPLE WEIGHT 54.43 kg (120 lb) TEMP. 27.2°C (81°F)
 IGN. SOURCE J2 Blasting Cap HUMIDITY 50%
 BOOSTER WT. 1.088 kg (2.4 lb) BAR. PRESS. 29.92
 TEST NO. 10-80-C12 WIND DIR. 110
 CONTRACT NO. NAS13-50 WIND VEL. 0-1 knots

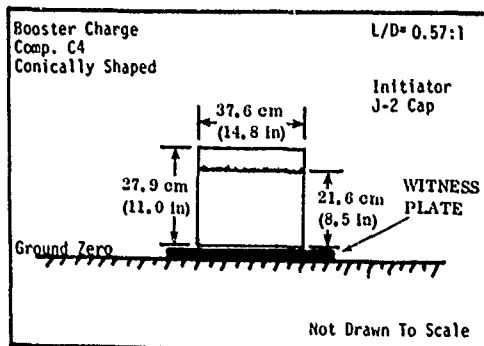

FIELD EVALUATION: Detonation occurred, no unreacted explosive-76.2 cm x 325.1 cm (2 ft 6 in x 10 ft 8 in) Crater size.

Channel Number	Distance Meters (ft)	Peak Pressure kPa (psi)	Scaled Positive Impulse kPa msec/kg ^{1/3} (psi msec/lb ^{1/3})	Time of Arrival (msec)
1	4.51	2896 (420.00)	149.1 (16.61)	2.5
2	(14.80)	4086 (592.50)	137.9 (15.37)	2.4
3	6.01	1886 (273.52)	217.3 (24.21)	3.4
4	(19.73)	1632 (236.70)	215.7 (24.03)	3.4
5	8.12	559 (81.00)	114.4 (12.75)	5.7
6	(26.64)	697 (101.09)	229.7 (25.59)	5.3
7	13.53	12 (13.27)	56.6 (6.31)	15.7
8	(44.39)	139 (20.12)	61.4 (6.84)	14.0
9	27.06	25.4 (3.69)	47.2 (5.26)	49.4
10	(88.78)	30.3 (4.40)	20.4 (2.27)	46.9
11	60.14	13.4 (1.95)	6.8 (0.76)	137.4
12	(197.3)	10.1 (1.46)	10.4 (1.16)	134.5

APPENDIX B
SELECTED PHOTOGRAPHS

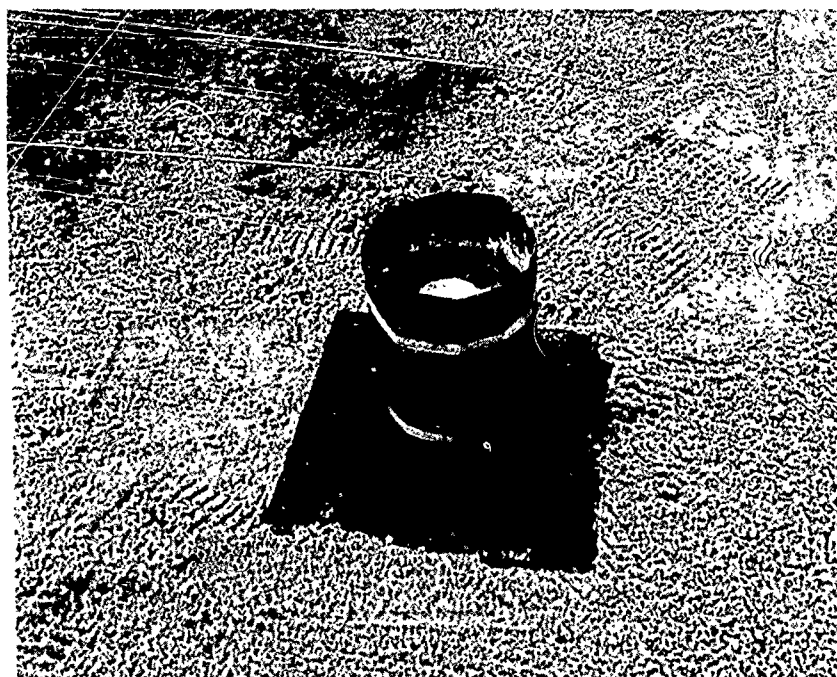

RDX pretest configuration
22.68 kg (50 lb) charge




RDX posttest crater
22.68 kg (50 lb) charge




RDx pretest configuration
45.36 kg (100 lb) charge weight




RDx posttest crater
45.36 kg (100 lb) charge weight

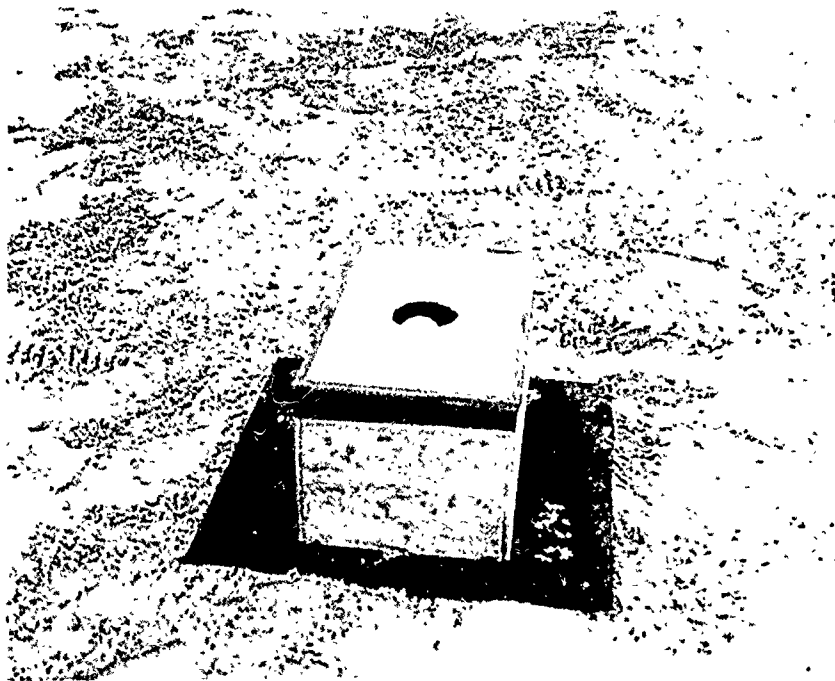

RDX pretest configuration
27.22 kg (60 lb) charge weight

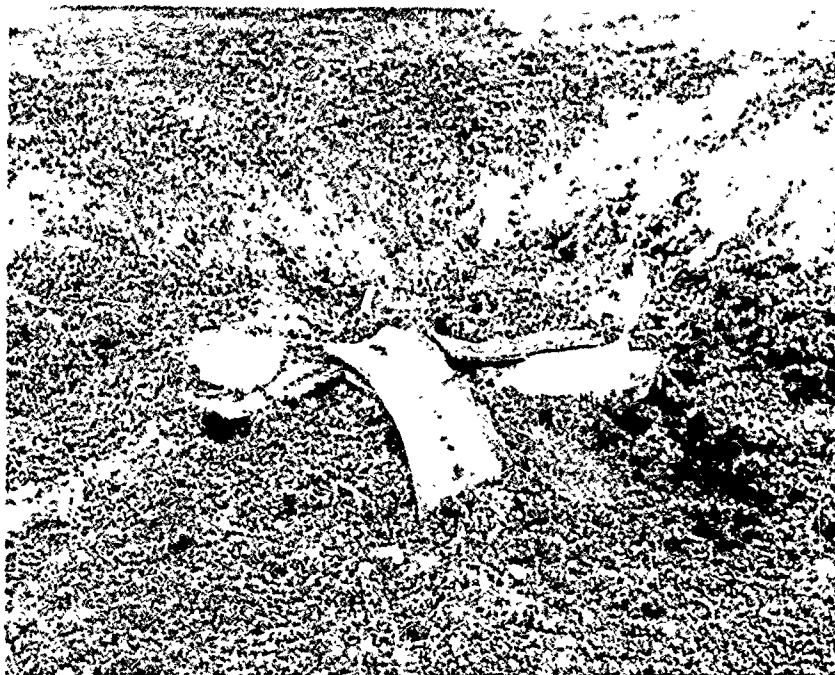

RDX posttest crater
27.22 kg (60 lb) charge weight

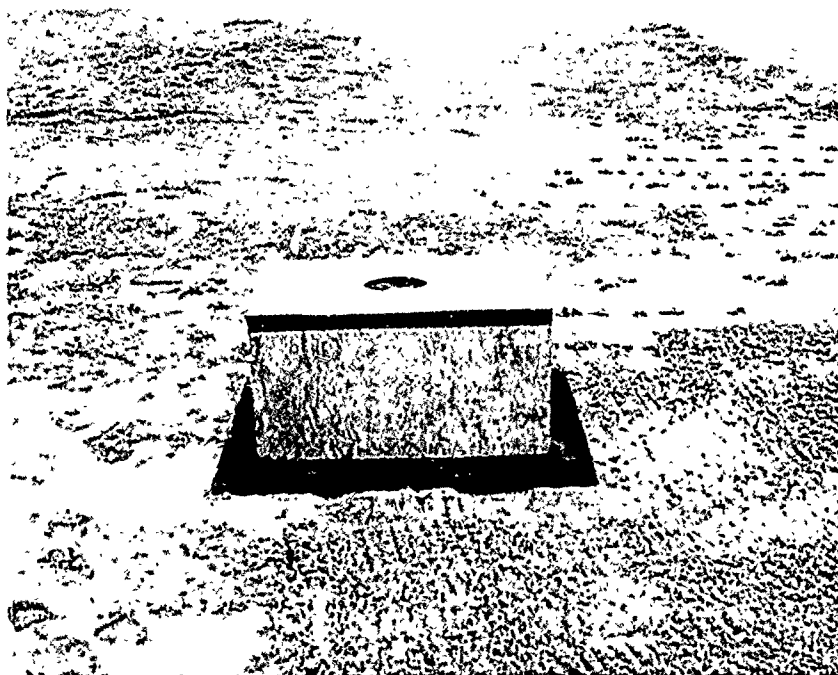

RDV pretest configuration
54.43 kg (120 lb) charge weight



RDV posttest crater
54.43 kg (120 lb) charge weight

DISTRIBUTION LIST

Commander
U.S. Army Armament Research
and Development Command
ATTN: DRDAR-CG
DRDAR-LCM-E
DRDAR-LCM-S (5)
DRDAR-SF
DRDAR-TSS (5)
Dover, NJ 07801

Chairman
Department of Defense
Explosive Safety Board (2)
Room 856C, Hoffman Building I
2461 Eisenhower Avenue
Alexandria, VA 22331

Administrator
Defense Technical Information Center
ATTN: Accessions Division (12)
Cameron Station
Alexandria, VA 22314

Commander
Department of the Army
Office, Chief of Research, Development
and Acquisition
ATTN: DAMA-CSM-P
Washington, DC 20310

Office, Chief of Engineers
ATTN: DALN-MCZ
Washington, DC 20314

Commander
U.S. Army Materiel Development
and Readiness Command
ATTN: DRCSF
5001 Eisenhower Avenue
Alexandria, VA 22333

Commander
DARCOM Installations and
Services Agency
ATTN: DRCIS-RI
Rock Island, IL 61299

Director
Industrial Base Engineering Activity
ATTN: DRXIB-MT (2)
DRXIB-EN
Rock Island, IL 61299

Commander
U.S. Army Munitions Production
Base Modernization Agency
ATTN: SARPM-PBM
SARPM-PBM-T
SARPM-PBM-L (2)
SARPM-PBM-E (2)
SARPM-PBM-LN-CE
Dover, NJ 07801

Commander
U.S. Army Armament Materiel
Readiness Command
ATTN: DRSAR-SF (3)
DRSAR-SC
DRSAR-EN
DRSAR-IRC
DRSAR-LEP-L
Rock Island, IL 61299

Director
DARCOM Field Safety Activity
ATTN: DRXOS-ES
Charlestown, IN 47111

Commander
Kansas Army Ammunition Plant
Parsons, KS 67357

Commander
Holston Army Ammunition Plant
Kingsport, TN 37660

Commander
Milan Army Ammunition Plant
Milan, TN 38358

Commander
Iowa Army Ammunition Plant
Middletown, IA 52638

District Engineer
U.S. Army Engineer District, Kansas
601 E. 12th Street
Kansas City, MO 64106

Civil Engineering Laboratory
Naval Construction Battalion Center
ATTN: L51
Port Hueneme, CA 93043

Commander
Naval Facilities Engineering Command
(Code 04, J. Tyrell)
200 Stovall Street
Alexandria, VA 22322

Commander
Chesapeake Division
Naval Facilities Engineering Command
Building S7
Washington Navy Yard
Washington, DC 20374

Commander
Naval Ammunition Depot
Naval Ammunition Production
Engineering Center
Crane, IN 47522

Commander/Director
Chemical Systems Laboratory
U.S. Army Armament Research
and Development Command
ATTN: DRDAR-CLJ-L
DRDAR-CLB-PA
APG, Edgewood Area, MD 21010

Director
Ballistics Research Laboratory
U.S. Army Armament Research
and Development Command
ATTN: DRDAR-TSB-S
Aberdeen Proving Ground, MD 21005

Chief
Benet Weapons Laboratory, LCWSL
U.S. Army Armament Research
and Development Command
ATTN: DRDAR-LCB-TL
Watervliet, NY 12189

Ammann and Whitney
2 World Trade Center
New York, NY 10048

Director
U.S. Army Materiel Systems
Analysis Activity
ATTN: DRXSY-MP
Aberdeen Proving Ground, MD 21005