


AD-A116 150 AIR FORCE AEROSPACE MEDICAL RESEARCH LAB WRIGHT-PATT--ETC F/G 1/2  
USAF BIOENVIRONMENTAL NOISE DATA HANDBOOK, VOLUME 164, MD-1 HEA--ETC(U)  
UNCLASSIFIED MAY 82 T H RAU AMRL-TR-75-50-VOL-164 NL

For 1  
A 116 150

END  
MAY 1982  
7 MD  
DTIC

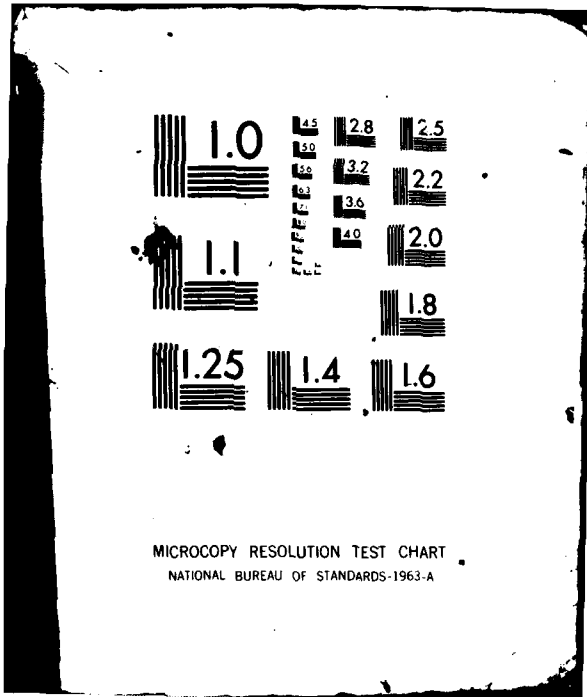

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AD A116150



SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER AMRL-TR-75-50, Vol. 164	2. GOVT ACCESSION NO. AD-A116 150	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) USAF BIOENVIRONMENTAL NOISE DATA HANDBOOK: MD-1 Heater, Duct Type, Portable	5. TYPE OF REPORT & PERIOD COVERED Volume 164 of a series		
	6. PERFORMING ORG. REPORT NUMBER		
7. AUTHOR(s) Thomas H. Rau, 1/Lt, USAF, BSC	8. CONTRACT OR GRANT NUMBER(s)		
9. PERFORMING ORGANIZATION NAME AND ADDRESS Air Force Aerospace Medical Research Laboratory Aerospace Medical Division, Air Force Systems Command, Wright-Patterson AFB, OH 45433	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62202F 72310714		
11. CONTROLLING OFFICE NAME AND ADDRESS Same as above	12. REPORT DATE May 1982		
	13. NUMBER OF PAGES 18		
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) Unclassified		
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE		
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Noise Noise Environments Bioenvironmental Noise Ground Support Equipment MD-1 Heater, Duct Type, Portable			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  The MD-1 heater is an electric motor-driven, portable ground heater used primarily for cockpit and cabin temperature control. This report provides measured and extrapolated data defining the bioacoustic environments produced by this unit operating outdoors on a concrete apron at normal rated conditions. Near-field data are reported for 37 locations in a wide variety of physical and psychoacoustic measures: overall and band sound pressure levels, C-weighted and A-weighted sound levels, preferred speech interference level, perceived noise			

DD FORM 1473 1 JAN 73 EDITION OF 1 NOV 65 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

levels, and limiting times for total daily exposure of personnel with and without standard Air Force ear protectors. Refer to Volume 1 of this handbook, "USAF Bioenvironmental Noise Data Handbook, Vol 1: Organization, Content and Application," AMRL-TR-75-50(1) 1975, for discussion of the objective and design of the handbook, the types of data presented, measurement procedures, instrumentation, data processing, definitions of quantities, symbols, equations, applications, limitations, etc.

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## PREFACE

This report was prepared by the Biodynamic Environment Branch, Air Force Aerospace Medical Research Laboratory, under Project/Task 723107, Measurement and Prediction of Noise Environments of Air Force Operations.

The author gratefully acknowledges Mr. John N. Cole for his assistance in preparing this report, Mr. Robert G. Powell for his assistance in acquiring the raw data, Mr. Henry T. Mohlman and Mr. Fred D. Lampley of the University of Dayton for their assistance in the mechanics of data processing and Mrs. Norma J. Peachey who typed and prepared the graphics.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	



## Table of Contents

	<i>Page</i>
INTRODUCTION .....	3
NEAR-FIELD NOISE .....	4

### List of Tables

#### NEAR-FIELD NOISE

1. Measurement Location and Test Condition for Operator Noise Measurements .....	4
2. Measured Sound Pressure Level 1/3 Octave Band .....	6-8
Octave Band .....	9-11
3. Measures of Human Noise Exposure .....	12-14

### List of Figures

#### NEAR-FIELD NOISE

1. Measurement Locations .....	5
--------------------------------	---

## INTRODUCTION

The MD-1 heater is an electric motor-driven, portable ground heater used primarily for cockpit and cabin temperature control. This unit is manufactured by the American Air Filter Company, Inc.

This volume provides measured and extrapolated data defining bioacoustic environments produced by this unit. Such data are essential to evaluate ear protection requirements, limiting personnel exposure times, voice communication capabilities, and annoyance problems associated with operations of the MD-1.

This volume is one of a series published by the Air Force Aerospace Medical Research Laboratory (AFAMRL) under the same report number (AMRL-TR-75-50) as a multi-volume handbook that quantifies the noise environments produced at flight/ground crew locations and in surrounding communities by operations of Air Force aircraft and ground support equipment. The far-field, community-type, noise data in the handbook describe the noise produced during ground operations of aircraft, ground support equipment, and other ground-based equipment or facilities.

Volume 1 of this handbook discusses the objectives and design of the handbook, the types of data presented, measurement procedures, instrumentation, data processing, definitions of quantities, symbols, equations, applications, limitations, etc. Refer to Volume 1 (reference 1) for such information because it is not repeated in other handbook volumes.

A cumulative index lists those aerospace systems contained in the handbook, and identifies the specific volumes containing each type of environmental noise data available (i.e., inflight/flight crew and passenger noise, near-field ground crew noise, far-field/community noise). Volume numbers are assigned sequentially as individual volumes are published. This index is periodically updated as individual volumes are published and is available upon request from AFAMRL/BBE, Wright-Patterson AFB, OH 45433. Organizations on the distribution list for the handbook will automatically receive a copy of each updated index as it is generated.

Direct any questions concerning the technical data in this report and other handbook volumes to: AFAMRL/BBE, Wright-Patterson AFB, OH 45433; AUTOVON 78-53675 or 78-53664; Commercial (513) 255-3675 or (513) 255-3664.

- 
1. Cole, John N., *USAF Bioenvironmental Noise Data Handbook, Volume 1: Organization, Content and Application, AMRL-TR-75-50(1), Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, 1975.*

## NEAR-FIELD NOISE

### MEASUREMENT

A standard MD-1 heater was operated outside in front of radar docks used for aircraft maintenance, on a concrete slab, at a normal rated condition. Due to the proximity of the radar docks no far-field data were acquired.

Figure 1 identifies 36 noise measurement locations at a height of 1.5 meters above the concrete apron (nominal ear level of ground crew). The 0 degree reference direction passes through the tow bar. The 36 locations on the two inner circles are in the acoustic near-field of the source where the sound wave fronts generally do not spherically diverge and the source appears to be spatially distributed (i.e., not a point source). Consequently, these near-field data cannot be extrapolated to longer distances but do properly define the levels at locations close to the unit.

Near-field measurements were also made at ear level at the operator control panel. Table 1 lists the numeric/alphabetic designators used on the data pages in this report to identify the operator measurement location and test conditions. The designator 1/A means operator location 1 and test condition A. Such a descriptor is essential in many handbook volumes that involve multiple combinations of location/conditions. It is used in this report to maintain format consistency.

### RESULTS

The measured data presented in Table 2 define the sound pressure levels (SPL) produced by the MD-1 unit at the 37 specified, near-field locations. This table includes the overall, 1/3 octave band, and octave band levels. From these data one can calculate the variety of measures in Table 3 which are widely used to assess the effects of noise on personnel and their performance.

For data at other intermediate near-field locations (i.e., for radial distances less than 4 meters) you can interpolate between the 36 measured data points.

TABLE 1

#### MEASUREMENT LOCATIONS AND TEST CONDITIONS FOR OPERATOR NOISE MEASUREMENTS

MD-1 Heater, Duct Type, Portable  
Tyndall AFB, 19 June 1980  
NSN 4520-01-012-3055

Measurement Location	
1	Operator Control Panel
Operation	
A	3450 RPM
Meteorology	
Temperature	29°C
Bar Pressure	.761 m Hg
Rel Humidity	69 %
Wind - Speed	3.1 m/sec (6 Kts)

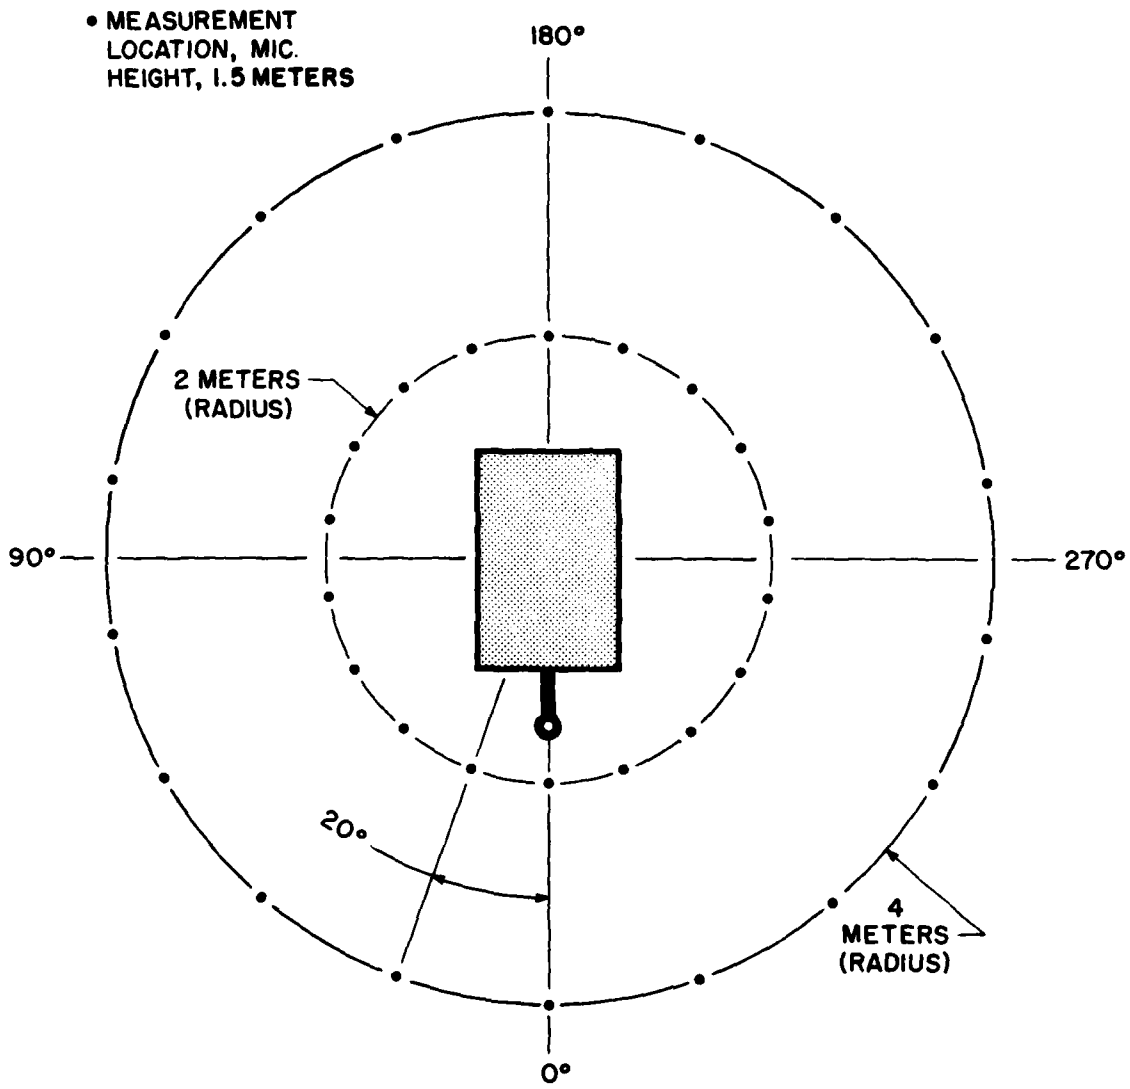


Figure 1. Measurement Locations

TABLE: MEASURED SOUND PRESSURE LEVEL (DB) 1/3 OCTAVE BAND		IDENTIFICATION:												
2		OMEGA 3.2												
NOISE SOURCE/SUBJECT: ( OPERATION: )		TEST BA-000-005												
MD-1 HEATER ( 3450 RPM )		RUN 01												
GROUND CREW ( )		06 APR 82												
NEAR FIELD NOISE LEVELS ( )		PAGE F1												
FREQ (HZ)	DISTANCE (M)-->	LOCATION/CONDITION												
	ANGLE (DEG)-->	0	20	40	60	80	100	120	140	160	180	200	220	240
	CONDITION-->>>	A	A	A	A	A	A	A	A	A	A	A	A	A
25														
31.5														
40														
50														
63														
80														
100														
125		73<	72<		71<	72<	74<	74<	72<	74<		74<	73<	74<
160		69<	69<	70<	69<	70<	73<	74<	74<	73<	70<	69<	71<	69<
200		70<	70<	69<	69<	72<	67<	70<	66<	68<	68<	70<	67<	68<
250		65<	65<	64<	66<	67<	68<	70<	66<	64<	63<	65<	67<	67<
315		68<	67<	65<	65<	62<	63<	62<			64<	65<	64<	65<
400		73	72	69	66<	65<	63<	66<	67<	65<	66<	66<	64<	64<
500		72	71	68	65<	64<	63<	63<	64<	67<	65<	66<	65<	65<
630		73	75	70	65	64<	64<	66<	65<	66<	68	65<	69	57
800		70	71	67	65<	63<	64<	62<	64<	64<	64<	61<	65<	64<
1000		68	70	68	68	62<	61<	59<	60<	60<	60<	61<	61<	61<
1250		65	69	68	72	61<	64	61<	63	61<	60<	61<	60<	61<
1600		63	65	64	61	57<	56<	56<	57<	55<	54<	57<	56<	56<
2000		66	67	65	63	60	57<	60	56<	56<	53<	57<	56<	56<
2500		64	65	64	61	57	55<	54<	55<	54<	52<	56	55<	54<
3150		64	64	64	61	56	54<	54<	54<	53<	52<	53<	53<	54<
4000		61	62	60	57	53	52<	52<	52<	51<	49<	51<	51<	52<
5000		60	62	59	56	52	52	50<	50<	50<	47<	49<	50<	50<
6300		57	59	57	54	49<	48<	47<	47<	46<	45<	47<	47<	48<
8000		54	57	54	50<	44<	42<	43<	44<	45<	41<	45<	44<	43<
10000		50	53	51	47<	41<	40<	40<	39<	39<		40<	39<	39<
OVERALL		61	62	79	79	78	79	79	78	79	76	78	78	78

< LEVEL CORRECTED TO REMOVE BACKGROUND/ELECTRONIC NOISE.

TABLE: MEASURED SOUND PRESSURE LEVEL (D3)		IDENTIFICATION#												
2 1/3 OCTAVE BAND		OMEGA 3.2												
NOISE SOURCE/SUBJECT: ( OPERATION# )		TEST BA-000-005												
MD-1 HEATER ( 3450 RPM )		RUN 02												
GROUND CREW ( )		06 APR 82												
NEAR FIELD NOISE LEVELS ( )		PAGE F2												
FREQ (HZ)	DISTANCE (M)--> ANGLE (DEG)--> CONDITION-->>>	LOCATION/CONDITION												
		4	4	4	4	4	2	2	2	2	2	2		
		260	280	300	320	340	0	20	40	60	80	100	120	140
25														
31.5														
40														
50														
63														
80														
100														
125		73<		72<	76<	74<	76<	73<	72<	73<	71<	74<	73<	72<
160		70<	72<	70<	69<	68<	76<	76<	76<	74<	59<	71<	72<	72<
200		69<	71<	60<	72<	71<	80	81	78	74<	71<	69<	67<	67<
250		65<	68<	63<	65<	68<	80	81	78	76	71<	70<	69<	68<
315		63<	62<	63<	65<	69<	75	76	73	73	69<	69<	67<	67<
400		64<	64<	67<	71	72	77	76	75	72	69	69	67<	67<
500		62<	62<	65<	69	69	76	74	73	68	68	66<	65<	67<
630		54<	66	66	68	69	74	79	78	71	69	69	68	70
800		63<	61<	62<	64<	67	74	70	75	59	66	66	68	64<
1000		61<	61<	63	66	69	73	72	73	68	66	62<	64	64
1250		62	62	64	67	70	74	74	78	69	69	64	65	56
1600		56<	53<	59<	62	63	69	71	69	64	60	59<	59<	58<
2000		57<	59	62	66	65	68	71	70	65	61	60	59	61
2500		54<	56	60	62	63	68	71	69	64	59	58	58	58
3150		54<	56	60	61	63	68	69	68	63	53	57	57	56
4000		53	54	58	57	60	65	68	65	59	56	54	54	54
5000		50<	51<	56	57	59	64	67	63	58	55	53	53	53
6300		45<	43<	53	54	57	62	64	61	55	53	50<	49<	49<
8000		43<	45<	50<	51	54	56	59	57	52	47<	47<	46<	46<
10000		39<	41<	47<	48<	51	52	56	52	48<	45<	44<	43<	43<
OVERALL		78	77	78	81	81	87	86	87	83	80	80	79	79

< LEVEL CORRECTED TO REMOVE BACKGROUND/ELECTRONIC NOISE.

TABLE: MEASURED SOUND PRESSURE LEVEL (DB)											IDENTIFICATION:	
2 1/3 OCTAVE BAND											OMEGA 3.2	
											TEST RA-000-005	
NOISE SOURCE/SUBJECT:	OPERATION:										RJM: 03	
MD-1 HEATER	3450 ROM											
GROUND CREW											06 APR 82	
NEAR FIELD NOISE LEVELS											PAGE F3	
FRF (HZ)	DISTANCE (M) -->	LOCATION/CONDITION										OPERATOR LOCATION TEST CONDITION 1/A
		2 160 A	2 180 A	2 200 A	2 220 A	2 240 A	2 260 A	2 280 A	2 300 A	2 320 A	2 340 A	
25												
31.5												
40												
50												74<
63												75<
80												72<
100										72<		73<
125		73<	72<	74<	74<	74<	72<	71<	74<	75<	76<	80<
160		72<	74<	77<	78<	76<	75<	73<	73<	72<	75<	83
200		72<	76	72<	71<	67<	67<	60<	70<	75<	73	77
250		71<	72<	71<	68<	68<	67<	70<	71<	75	73	75
315		69<	67<	68<	67<	65<	67<	68<	69<	71<	74	72<
400		72	72	71	68	69	66<	69	71	73	75	75
500		68	69	64	67<	60<	65<	67<	67<	71	74	73
630		70	71	69	71	67	67	67	67	70	74	74
800		65	66	68	69	65	64<	63<	62	69	72	72
1000		65	66	69	66	63	52<	64	63	59	70	70
1250		64	65	72	68	65	63	67	66	71	70	72
1600		60	61	61	59<	50<	57<	59<	61	67	68	65
2000		60	61	61	61	58<	57<	60	63	67	69	66
2500		58	59	60	58	56	56	56	50	65	68	62
3150		57	58	58	57	55	56	57	60	64	63	61
4000		55	56	56	55	54	54	54	57	60	64	59
5000		53	54	53	54	53	52	52	55	60	62	57
6300		50<	51	52	50<	48<	48<	48<	52	57	59	54
8000		45<	49<	49<	48<	46<	45<	46<	49<	54	56	54
10000		42<	44<	44<	43<	43<	43<	43<	46<	50	52	47<
OVERALL		81	82	82	82	80	79	79	81	83	86	88

< LEVEL CORRECTED TO REMOVE BACKGROUND/ELECTRONIC NOISE.

TABLE: MEASURED SOUND PRESSURE LEVEL (DB)		IDENTIFICATION:												
OCTAVE BAND														
2		OMEGA 3.2												
NOISE SOURCE/SUBJECT:		OPERATION:										TEST BA-003-005		
MD-1 HEATER		3450 RPM										RUN 01		
GROUND CREW												06 APR 82		
NEAR FIELD NOISE LEVELS												PAGE J1		
		LOCATION/CONDITION												
FREQ (HZ)	DISTANCE (M)-->	4	4	4	4	4	4	4	4	4	4	4	4	4
	ANGLE (DEG)-->	0	20	40	60	80	100	120	140	160	180	210	225	240
	CONDITION-->	A	A	A	A	A	A	A	A	A	A	A	A	A
31.5														
63														
125		74	74		73	74	77	77	76	77		75	75	75
250		73	72	72	72	73	71	71	69	69	70	72	71	71
500		77	77	73	70	69	68	70	71	71	71	70	72	70
1000		73	75	72	74	67	68	66	67	67	67	66	67	67
2000		69	70	69	67	63	61	62	61	60	58	61	61	60
4000		67	67	66	63	59	57	57	57	56	54	56	56	57
8000		59	62	59	50	51	49	49	49	49	46	49	49	49
OVERALL		91	82	78	79	79	79	79	78	79	75	78	78	78

TABLE: MEASURED SOUND PRESSURE LEVEL (D)		IDENTIFICATION:													
2 OCTAVE BAND		OMEGA 3.2													
		TEST BA-000-005													
NOISE SOURCE/SUBJECT:		OPERATION:												RUN 02	
MD-1 HEATER		3450 RPM													
GROUND CREW														06 APR 82	
NEAR FIELD NOISE LEVELS														PAGE J2	
		LOCATION/CONDITION													
FRF	DISTANCE (M)-->	4	4	4	4	4	2	2	2	2	2	2	2		
(HZ)	ANGLE (DEG)-->	260	280	300	320	340	0	20	40	50	80	100	120	140	
	CONDITION-->	A	A	A	A	A	A	A	A	A	A	A	A	A	
31.5															
63															
125		75		74	77	75	79	77	77	76	73	76	76	75	
250		71	73	72	74	74	83	85	82	79	75	74	73	72	
500		69	69	71	74	75	80	82	80	75	74	73	72	73	
1000		67	66	68	70	73	78	80	80	73	72	70	71	69	
2000		61	62	65	68	68	73	76	74	69	65	64	63	64	
4000		57	59	63	63	66	71	73	71	65	61	60	60	59	
8000		48	51	55	56	59	63	66	63	57	54	52	51	51	
OVERALL		73	75	78	81	81	87	88	87	83	80	80	79	79	

TABLE: MEASURED SOUND PRESSURE LEVEL (DB)											IDENTIFICATION	
2											OMEGA 3.2	
OCTAVE BAND											TEST BA-000-005	
NOISE SOURCE/SUBJECT:	OPERATION:										RUN 03	
MD-1 HEATER	3450 RPM											
GROUND CREW											06 APR 82	
NEAR FIELD NOISE LEVELS											PAGE J3	
LOCATION/CONDITION											OPERATOR LOCATION	
FREQ	DISTANCE (M)-->	2	2	2	2	2	2	2	2	2	2	TEST CONDITION
(HZ)	ANGLE (DEG)-->	160	180	200	220	240	260	280	300	320	340	1/A
	CONDITION-->>	A	A	A	A	A	A	A	A	A	A	
31.5												79
63												85
125		75	76	79	79	78	77	75	78	77	78	80
250		75	78	76	74	72	72	74	75	79	82	79
500		75	76	74	74	72	71	72	73	76	79	76
1000		69	70	75	72	69	68	70	70	75	76	69
2000		64	65	65	64	62	62	64	66	71	73	64
4000		60	61	61	60	59	59	60	63	66	70	57
8000		52	54	54	53	51	51	51	54	59	61	
OVERALL		81	82	82	82	80	79	79	81	83	86	88

11

TABLE: MEASURES OF HUMAN NOISE EXPOSURE											IDENTIFICATION:		
3											OMEGA 3.2		
NOISE SOURCE/SUBJECT: ( OPERATION: )											TEST BA-000-005		
MD-1 HEATER ( 3450 RPM )											RJM 01		
GROUND CREW ( )											06 APR 87		
NEAR FIELD NOISE LEVELS ( )											PAGE 41		
LOCATION/CONDITION													
DISTANCE (M)-->	4	4	4	4	4	4	4	4	4	4	4	4	4
ANGLE (DEG)-->	0	20	40	60	80	100	120	140	160	180	200	220	240
CONDITION-->>	A	A	A	A	A	A	A	A	A	A	A	A	A
HAZARD/PROTECTION													
C-WEIGHTED OVERALL SOUND LEVEL (OASLC IN DBC) AT EAR													
A-WEIGHTED OVERALL SOUND LEVEL (OASLA IN DBA) AT EAR													
MAXIMUM PERMISSIBLE TIME (T IN MINUTES) FOR ONE EXPOSURE PER DAY (AFR 161-35, JULY 73)													
NO PROTECTION													
OASLC	81	82	79	79	78	79	79	78	78	76	78	78	78
OASLA	76	79	77	76	72	72	72	72	72	72	71	72	72
T	960	960	960	960	960	960	960	960	960	960	960	960	960
MINIMUM SPL EAR MUFFS													
OASLA*	53	58	54	55	55	57	57	56	56	53	56	55	55
T	960	960	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS													
OASLA*	52	52	49	50	50	52	52	51	51	48	51	50	51
T	960	960	960	960	960	960	960	960	960	960	960	960	960
V-51R EAR PLUGS													
OASLA*	54	55	52	51	48	49	49	49	49	49	48	49	49
T	960	960	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS PLUS V-51R EAR PLUGS													
OASLA*	40	41	38	38	35	35	35	35	35	34	35	35	35
T	960	960	960	960	960	960	960	960	960	960	960	960	960
H-133 GROUND COMMUNICATION UNIT													
OASLA*	50	51	49	49	46	47	46	46	46	43	45	45	45
T	960	960	960	960	960	960	960	960	960	960	960	960	960
COMMUNICATION													
PREFERRED SPEECH INTERFERENCE LEVEL (PSIL IN DB)													
PSIL	73	74	72	70	66	65	66	66	66	65	66	66	66
ANNNOYANCE													
PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT IN PNOB)													
TONE CORRECTION (C IN DB)													
PNLT	93	94	92	91	87	87	87	87	86	85	86	87	86
C	3	3	3	3	3	3	3	3	3	3	3	3	3

\* BASED ON CALCULATED SPL SPECTRUM UNDER PROTECTIVE DEVICE.

TABLE: MEASURES OF HUMAN NOISE EXPOSURE													IDENTIFICATION			
3													OMEGA 3.2			
NOISE SOURCE/SUBJECT: ( OPERATIONS: )													TEST BA-000-005			
MO-1 HEATER ( 3450 RPM )													RUN 02			
GROUND CREW ( )													06 APR 82			
NEAR FIELD NOISE LEVELS ( )													PAGE 02			
													LOCATION/CONDITION			
DISTANCE (M)-->	4	4	4	4	4	2	2	2	2	2	2	2	2	2	2	2
ANGLE (DEG)-->	260	280	300	320	340	0	20	40	60	60	100	120	140			
CONDITION-->>	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
HAZARD/PROTECTION																
C-WEIGHTED OVERALL SOUND LEVEL (OASLC IN DB) AT EAR																
A-WEIGHTED OVERALL SOUND LEVEL (OASLA IN DB) AT EAR																
MAXIMUM PERMISSIBLE TIME (T IN MINUTES) FOR ONE EXPOSURE PER DAY (AFR 161-35, JULY 73)																
NO PROTECTION																
OASLC	77	77	79	81	81	87	86	85	83	80	80	79	79			
OASLA	71	72	73	76	77	83	85	84	78	76	74	74	74			
T	960	960	960	960	960	771	404	480	960	960	960	960	960			
MINIMUM QPL EAR MUFFS																
OASLA*	55	54	55	58	57	63	64	62	59	56	57	56	56			
T	960	960	960	960	960	960	960	960	960	960	960	960	960			
AMERICAN OPTICAL 1700 EAR MUFFS																
OASLA*	50	49	50	53	52	59	59	57	55	51	52	51	51			
T	960	960	960	960	960	960	960	960	960	960	960	960	960			
V-51R EAR PLUGS																
OASLA*	48	48	49	52	53	59	61	60	55	52	51	51	51			
T	960	960	960	960	960	960	960	960	960	960	960	960	960			
AMERICAN OPTICAL 1700 EAR MUFFS PLUS V-51R EAR PLUGS																
OASLA*	34	34	35	38	39	45	46	46	40	38	37	37	37			
T	960	960	960	960	960	960	960	960	960	960	960	960	960			
H-133 GROUND COMMUNICATION UNIT																
OASLA*	45	45	46	49	50	55	57	56	51	48	47	47	47			
T	960	960	960	960	960	960	960	960	960	960	960	960	960			
COMMUNICATION																
PREFERRED SPEECH INTERFERENCE LEVEL (PSIL IN DB)																
PSIL	65	66	68	71	72	77	79	78	72	70	69	68	69			
ANNOYANCE																
PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT IN PND)																
TONE CORRECTION (C IN DB)																
PNLT	85	86	89	92	92	98	100	98	93	90	89	88	89			
C	3	3	3	3	3	3	3	3	3	3	3	3	3			

\* BASED ON CALCULATED SP. SPECTRUM UNDER PROTECTIVE DEVICE.

U.S. Government Printing Office: 1982 - 559-007/6050

TABLE: MEASURES OF HUMAN NOISE EXPOSURE											IDENTIFICATION:
3											OMEGA 3.2
NOISE SOURCE/SUBJECT: ( OPERATION: )											TEST BA-000-005
MO-1 HEATER ( 3490 RPM )											RUN 03
GROUND CREW ( )											06 APR 82
NEAR FIELD NOISE LEVELS ( )											PAGE 43
LOCATION/CONDITION											OPERATOR LOCATION
DISTANCE (M)-->	2	2	2	2	2	2	2	2	2	2	TEST CONDITION
ANGLE (DEG)-->	160	180	200	220	240	260	280	300	320	340	
CONDITION-->	A	A	A	A	A	A	A	A	A	A	1/A
HAZARD/PROTECTION											
C-WEIGHTED OVERALL SOUND LEVEL (OASLC IN DBC) AT EAR											
A-WEIGHTED OVERALL SOUND LEVEL (OASLA IN DBA) AT EAR											
MAXIMUM PERMISSIBLE TIME (T IN MINUTES) FOR ONE EXPOSURE PER DAY (AFR 161-35, JULY 73)											
NO PROTECTION											
OASLC	30	82	82	82	80	79	79	81	83	86	88
OASLA	75	76	73	76	74	73	74	75	79	81	81
T	960	960	960	960	960	960	960	960	960	607	607
MINIMUM SPL EAR MUFFS											
OASLA*	58	59	53	60	56	57	55	59	60	62	65
T	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS											
OASLA*	53	54	54	54	53	52	51	54	55	57	61
T	960	960	960	960	960	960	960	960	960	960	960
V-51R EAR PLUGS											
OASLA*	52	53	54	53	51	50	51	52	55	58	58
T	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS PLUS V-51R EAR PLUGS											
OASLA*	38	39	40	39	37	36	37	38	41	43	44
T	960	960	960	960	960	960	960	960	960	960	960
H-133 GROUND COMMUNICATION UNIT											
OASLA*	48	49	51	50	48	47	47	49	52	54	55
T	960	960	960	960	960	960	960	960	960	960	960
COMMUNICATION											
PREFERRED SPEECH INTERFERENCE LEVEL (PSIL IN DB)											
PSIL	63	70	72	70	66	67	69	70	74	76	75
ANNOYANCE											
PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT IN PNUB)											
TONE CORRECTION (C IN DB)											
PNLT	90	91	92	91	89	88	89	89	94	97	95
C	3	3	3	3	3	3	3	1	3	3	2

\* BASED ON CALCULATED SPL SPECTRUM UNDER PROTECTIVE DEVICE.

END

DATE  
FILMED

7 82

DTIC