


AD-A116 151 AIR FORCE AEROSPACE MEDICAL RESEARCH LAB WRIGHT-PATT--ETC F/G 1/2
USAF BIOENVIRONMENTAL NOISE DATA HANDBOOK, VOLUME 165, MC-1 HEA--ETC(11)
JUN 82 T H RAU
UNCLASSIFIED AMRL-TR-75-50-VOL-165 NL

1-1		2-1		3-1		4-1		5-1		6-1		7-1		8-1		9-1		10-1		11-1		12-1		13-1		14-1		15-1		16-1		17-1		18-1		19-1		20-1		21-1		22-1		23-1		24-1		25-1		26-1		27-1		28-1		29-1		30-1		31-1		32-1		33-1		34-1		35-1		36-1		37-1		38-1		39-1		40-1		41-1		42-1		43-1		44-1		45-1		46-1		47-1		48-1		49-1		50-1		51-1		52-1		53-1		54-1		55-1		56-1		57-1		58-1		59-1		60-1		61-1		62-1		63-1		64-1		65-1		66-1		67-1		68-1		69-1		70-1		71-1		72-1		73-1		74-1		75-1		76-1		77-1		78-1		79-1		80-1		81-1		82-1		83-1		84-1		85-1		86-1		87-1		88-1		89-1		90-1		91-1		92-1		93-1		94-1		95-1		96-1		97-1		98-1		99-1		100-1		101-1		102-1		103-1		104-1		105-1		106-1		107-1		108-1		109-1		110-1		111-1		112-1		113-1		114-1		115-1		116-1		117-1		118-1		119-1		120-1		121-1		122-1		123-1		124-1		125-1		126-1		127-1		128-1		129-1		130-1		131-1		132-1		133-1		134-1		135-1		136-1		137-1		138-1		139-1		140-1		141-1		142-1		143-1		144-1		145-1		146-1		147-1		148-1		149-1		150-1		151-1		152-1		153-1		154-1		155-1		156-1		157-1		158-1		159-1		160-1		161-1		162-1		163-1		164-1		165-1		166-1		167-1		168-1		169-1		170-1		171-1		172-1		173-1		174-1		175-1		176-1		177-1		178-1		179-1		180-1		181-1		182-1		183-1		184-1		185-1		186-1		187-1		188-1		189-1		190-1		191-1		192-1		193-1		194-1		195-1		196-1		197-1		198-1		199-1		200-1		201-1		202-1		203-1		204-1		205-1		206-1		207-1		208-1		209-1		210-1		211-1		212-1		213-1		214-1		215-1		216-1		217-1		218-1		219-1		220-1		221-1		222-1		223-1		224-1		225-1		226-1		227-1		228-1		229-1		230-1		231-1		232-1		233-1		234-1		235-1		236-1		237-1		238-1		239-1		240-1		241-1		242-1		243-1		244-1		245-1		246-1		247-1		248-1		249-1		250-1		251-1		252-1		253-1		254-1		255-1		256-1		257-1		258-1		259-1		260-1		261-1		262-1		263-1		264-1		265-1		266-1		267-1		268-1		269-1		270-1		271-1		272-1		273-1		274-1		275-1		276-1		277-1		278-1		279-1		280-1		281-1		282-1		283-1		284-1		285-1		286-1		287-1		288-1		289-1		290-1		291-1		292-1		293-1		294-1		295-1		296-1		297-1		298-1		299-1		300-1		301-1		302-1		303-1		304-1		305-1		306-1		307-1		308-1		309-1		310-1		311-1		312-1		313-1		314-1		315-1		316-1		317-1		318-1		319-1		320-1		321-1		322-1		323-1		324-1		325-1		326-1		327-1		328-1		329-1		330-1		331-1		332-1		333-1		334-1		335-1		336-1		337-1		338-1		339-1		340-1		341-1		342-1		343-1		344-1		345-1		346-1		347-1		348-1		349-1		350-1		351-1		352-1		353-1		354-1		355-1		356-1		357-1		358-1		359-1		360-1		361-1		362-1		363-1		364-1		365-1		366-1		367-1		368-1		369-1		370-1		371-1		372-1		373-1		374-1		375-1		376-1		377-1		378-1		379-1		380-1		381-1		382-1		383-1		384-1		385-1		386-1		387-1		388-1		389-1		390-1		391-1		392-1		393-1		394-1		395-1		396-1		397-1		398-1		399-1		400-1		401-1		402-1		403-1		404-1		405-1		406-1		407-1		408-1		409-1		410-1		411-1		412-1		413-1		414-1		415-1		416-1		417-1		418-1		419-1		420-1		421-1		422-1		423-1		424-1		425-1		426-1		427-1		428-1		429-1		430-1		431-1		432-1		433-1		434-1		435-1		436-1		437-1		438-1		439-1		440-1	
-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	-----	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--	-------	--



AD A116151

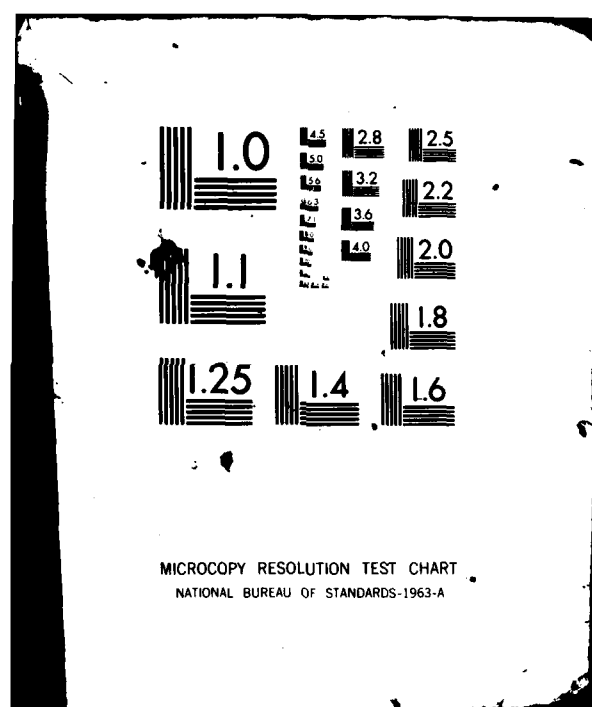

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER	
AMRL-TR-75-50, Vol. 165	AD-A116151		
4. TITLE (and Subtitle)		5. TYPE OF REPORT & PERIOD COVERED	
USAF BIOENVIRONMENTAL NOISE DATA HANDBOOK: MC-1 Heater, Duct Type, Portable		Volume 165 of a series	
		6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s)		8. CONTRACT OR GRANT NUMBER(s)	
Thomas H. Rau, 1/Lt, USAF, BSC			
9. PERFORMING ORGANIZATION NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
Air Force Aerospace Medical Research Laboratory Aerospace Medical Division, Air Force Systems Command, Wright-Patterson AFB, OH 45433		62202F 72310714	
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE	
Same as above		June 1982	
		13. NUMBER OF PAGES	
		53	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report)	
		Unclassified	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)			
Approved for public release; distribution unlimited			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)			
Noise Noise Environments Bioenvironmental Noise Ground Support Equipment MC-1 Heater, Duct Type, Portable			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)			
The MC-1 heater is a gasoline-motor driven, portable ground heater used primarily for cockpit and cabin temperature control. This report provides measured and extrapolated data defining the bioacoustic environments produced by this unit operating outdoors on a concrete apron at normal rated conditions. Near-field data are reported for 37 locations in a wide variety of physical and psychoacoustic measures: overall and band sound pressure levels, C-weighted and A-weighted sound levels, preferred speech interference level, perceived noise levels, and limiting times for total daily exposure of personnel.			

DTIC
ELECTE
JUN 29 1982
S D

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

with and without standard Air Force ear protectors. Far-field data measured at 36 locations are normalized to standard meteorological conditions and extrapolated from 10 - 1600 meters to derive sets of equal-value contours for these same seven acoustic measures as functions of angle and distance from the source. Refer to Volume 1 of this handbook, "USAF Bioenvironmental Noise Data Handbook, Vol 1: Organization, Content and Application," AMRL-TR-75-50(1) 1975, for discussion of the objective and design of the handbook, the types of data presented, measurement procedures, instrumentation, data processing, definitions of quantities, symbols, equations, applications, limitations, etc.

PREFACE

This report was prepared by the Biodynamic Environment Branch, Air Force Aerospace Medical Research Laboratory, under Project/Task 723107, Measurement and Prediction of Noise Environments of Air Force Operations.

The author gratefully acknowledges Mr. John N. Cole for his assistance in preparing this report, Mr. Robert G. Powell for his assistance in acquiring the raw data, Mr. Henry T. Mohlman and Mr. Fred D. Lampley of the University of Dayton for their assistance in the mechanics of data processing, and Mrs. Norma J. Peachey who typed and prepared the graphics.



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A	

Table of Contents

	<i>Page</i>
INTRODUCTION.....	3
NEAR-FIELD NOISE	4
FAR-FIELD NOISE.....	5

List of Tables

NEAR-FIELD NOISE

1. Measurement Location and Test Condition for Operator Noise Measurements	4
2. Measured Sound Pressure Level	
1/3 Octave Band	6-8
Octave Band	9-11
3. Measures of Human Noise Exposure.....	12-14

FAR-FIELD NOISE

4. Measured Sound Pressure Level	
1/3 Octave Band	15-16

List of Figures

NEAR-FIELD NOISE

1. Measurement Locations.....	17
-------------------------------	----

FAR-FIELD NOISE

1. Measurement Locations.....	17
2. Normalized Noise Levels.....	18-19
3. Overall Sound Pressure Level — Contours	20-21
4. C-Weighted Sound Level — Contours	22-23
5. A-Weighted Sound Level — Contours.....	24-25
6. Perceived Noise Level — Contours	26-27
7. Speech Interference Level — Contours.....	28-29
8. Permissible Exposure Time — Contours	30-31
9. Octave Band Sound Pressure Level — Contours	32-49

INTRODUCTION

The MC-1 heater is a gasoline-motor-driven, portable ground heater used primarily for cockpit and cabin temperature control. This unit is manufactured by the American Air Filter Company, Inc.

This volume provides measured and extrapolated data defining bioacoustic environments produced by this unit. Such data are essential to evaluate ear protection requirements, limiting personnel exposure times, voice communication capabilities, and annoyance problems associated with operations of the MC-1.

This volume is one of a series published by the Air Force Aerospace Medical Research Laboratory (AFAMRL) under the same report number (AMRL-TR-75-50) as a multi-volume handbook that quantifies the noise environments produced at flight/ground crew locations and in surrounding communities by operations of Air Force aircraft and ground support equipment. The far-field, community-type, noise data in the handbook describe the noise produced during ground operations of aircraft, ground support equipment, and other ground-based equipment or facilities.

Volume 1 of this handbook discusses the objectives and design of the handbook, the types of data presented, measurement procedures, instrumentation, data processing, definitions of quantities, symbols, equations, applications, limitations, etc. Refer to Volume 1 (reference 1) for such information because it is not repeated in other handbook volumes.

A cumulative index lists those aerospace systems contained in the handbook, and identifies the specific volumes containing each type of environmental noise data available (i.e., inflight/flight crew and passenger noise, near-field ground crew noise, far-field/community noise). Volume numbers are assigned sequentially as individual volumes are published. This index is periodically updated as individual volumes are published and is available upon request from AFAMRL/BBE, Wright-Patterson AFB, OH 45433. Organizations on the distribution list for the handbook will automatically receive a copy of each updated index as it is generated.

Direct any questions concerning the technical data in this report and other handbook volumes to: AFAMRL/BBE, Wright-Patterson AFB, OH 45433; AUTOVON 78-53675 or 78-53664; Commercial (513) 255-3675 or (513) 255-3664.

1. Cole, John N., USAF Bioenvironmental Noise Data Handbook, Volume 1: Organization, Content and Application, AMRL-TR-75-50(1), Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, 1975.

NEAR-FIELD NOISE

MEASUREMENT

A standard MC-1 heater was operated outdoors on a concrete apron at normal rated conditions. Table 1 notes the surface meteorological conditions at the time of measurement.

Figure 1 identifies 72 noise measurement locations at a height of 1.5 meters above the concrete apron (nominal ear level of ground crew). The 0 degree reference direction passes through the tow bar. The 36 locations on the two inner circles are in the acoustic near-field of the source where the sound wave fronts generally do not spherically diverge and the source appears to be spatially distributed (i.e., not a point source). Consequently, these near-field data cannot be extrapolated to longer distances but do properly define the levels at locations close to the unit.

Near-field measurements were also made at ear level at the operator control panel. Table 1 lists the numeric/alphabetic designator used on the data pages in this report to identify the operator measurement location and test condition. The designator 1/A means operator location 1 and test condition A. Such a descriptor is essential in many handbook volumes that involve multiple combinations of locations/conditions. It is used in this report to maintain format consistency.

RESULTS

The measured data presented in Table 2 define the sound pressure levels (SPL) produced by the MC-1 unit at the 37 specified, near-field locations. This table includes the overall, 1/3 octave band, and octave band levels. From these data one can calculate the variety of measures in Table 3 which are widely used to assess the effects of noise on personnel and their performance.

For data at other intermediate near-field locations (i.e., for radial distance less than 10 meters) you can interpolate between the 72 measured data points. All near-field data are for the meteorological conditions at the time of test but are valid for all typical airbase meteorology because of the short distances over which the sound is propagated.

TABLE 1

MEASUREMENT LOCATIONS AND TEST CONDITIONS FOR OPERATOR NOISE MEASUREMENTS

MC-1 Heater, Duct Type, Portable
Tyndall AFB, 19 June 1980
NSN 4520-01-012-2044, Field # F107

Measurement Location	
1	Operator Control Panel
Operation	
A	3400 RPM
Meteorology	
Temperature	29 °C
Bar Pressure	.761 M Hg
Rel Humidity	69 %
Wind - Speed	3.1 M/Sec (6 Kts)

FAR-FIELD NOISE

MEASUREMENTS

Noise measurements were also made on the same MC-1 unit under the same test conditions at the outer circle locations on Figure 1. These 36 locations are in the acoustic far-field of the source where the sound wave fronts spherically diverge and the unit may be regarded as a point noise source. Under these far-field conditions, the measured data can be extrapolated to longer distances.

RESULTS

Table 4 lists the overall and 1/3 octave band SPL measured at the 36 far-field locations under the meteorological conditions at the time of test. These data were normalized to 10 meters distance and standard meteorological conditions (15C temperature, 70% rel humidity, 0.760 meter Hg barometric pressure) and used to derive the graphic data in Figure 2 which provides a compact summary of the far-field noise characteristics of the MC-1 heater in a standard format.

These measured data were also used to derive sets of equal noise contours (Figures 3 through 9) describing seven different measures of noise as functions of angle and distance from the source for standard day meteorology. Note that Figure 8 contours identify limiting exposure times for personnel. Missing data points on any of the contours are the result of eliminating measured data which contained excessive influence of spurious background noise present at the time of measurement. In some cases contour levels at these missing data points were estimated and indicated with dashed lines.

TABLE: MEASURED SOUND PRESSURE LEVEL (DB)												
1/3 OCTAVE BAND												
2												
NOISE SOURCE/SUBJECT: (OPERATION:)												
MC-1 HEATER, DUCT TYPE, (3400 RPM)												
PORTABLE ()												
NEAR FIELD NOISE LEVELS ()												
IDENTIFICATION:)												
) OMEGA 3.2												
) TEST BA-000-002												
) RUN 01												
) 25 JAN 82												
) PAGE F1												
LOCATION/CONDITION												
FREQ	DISTANCE (M)-->	4	4	4	4	4	4	4	4	4	4	4
(HZ)	ANGLE (DEG)-->	0	20	40	60	80	100	120	140	160	180	200
	CONDITION-->	A	A	A	A	A	A	A	A	A	A	A
25												
31.5		77<	77<	77<	76<	75<			78<	77<	78<	75<
40												77<
50		85	85	84	83	81<	80<	79<	79<	79<	79<	81<
63		84	84	83	82<	81<	80<	79<	79<	79<	79<	80<
80		74<	73<	72<	72<	73<	73<	72<				72<
100		71<	68<	71<	74	76	75	73	76	75	72	72<
125		73	74	76	78	78	76	75	78	77	75	75
160		75	75	78	79	80	80	80	79	82	82	80
200		71	70	70	72	72	70	71	71	72	72	71
250		75	75	73	71	72	71	72	74	75	75	74
315		80	79	76	71	68	70	73	75	76	76	75
400		90	79	76	73	75	77	72	78	75	73	74
500		78	76	76	71	72	70	72	73	72	75	72
630		77	76	74	71	71	74	71	74	71	72	71
800		74	73	73	71	68	68	68	68	68	69	67
1000		77	73	74	70	67	66	66	70	68	65	66
1250		74	73	73	70	68	68	66	67	67	65	65
1600		71	71	70	68	63	62	62	62	62	61	63
2000		71	71	68	65	62	60	60	61	61	60	62
2500		72	71	70	67	65	62	62	63	61	60	61
3150		73	72	70	67	62	60	61	61	60	60	61
4000		70	70	68	65	59	57	57	57	57	56	57
5000		68	68	67	63	56	55	55	55	56	54	56
6300		67	65	64	62	56	53	53	54	54	52	55
8000		66	67	64	63	55	55	54	55	54	54	55
10000		63	62	62	60	51	51	51	51	50	49	52
OVERALL		91	90	89	89	88	87	86	88	88	86	88

< LEVEL CORRECTED TO REMOVE BACKGROUND/ELECTRONIC NOISE.

TABLE 1: MEASURED SOUND PRESSURE LEVEL (DB)		IDENTIFICATION:											
1/3 OCTAVE BAND													
		OMEGA 3.2											
		TEST BA-000-002											
NOISE SOURCE/SUBJECT:		RUN 02											
MC-1 HEATER, DUCT TYPE,		25 JAN 82											
PORTABLE													
NEAR FIELD NOISE LEVELS		PAGE F2											
		LOCATION/CONDITION											
FREQ	DISTANCE (M) ->	4	4	4	4	2	2	2	2	2	2	2	2
(HZ)	ANGLE (DEG) ->	250	280	300	320	340	0	20	40	60	80	100	120
	CONDITION ->	A	A	A	A	A	A	A	A	A	A	A	A
25													
31.5		77<	77<	76<	79<	76<	80<	79<	78<	77<	76<	77<	76<
40													
50		83	83	84	83	83	87	87	86	85	84	82	83
63		82<	83	83	83	83	87	86	85	84	83	83	82<
80		73<	75<	75<	75<	73<	74<	76<	75<	74<	71<	70<	
100		74	72<	72<	72<	70<	73	74	75	74	74	72	73
125		76	76	77	75	72<	77	74	76	76	76	75	77
160		76	76	80	82	80	81	79	80	81	79	76	79
200		70	70	70	72	73	82	82	81	78	75	72	71
250		73	74	74	75	75	85	83	81	79	78	77	73
315		75	74	74	76	79	85	82	82	80	77	76	74
400		73	74	75	77	80	82	83	83	77	79	79	81
500		73	74	73	77	81	83	83	81	75	75	76	80
630		75	73	74	73	76	83	83	78	73	75	74	74
800		67	68	69	71	72	79	80	77	72	72	71	70
1000		69	72	71	74	75	82	80	77	73	72	71	72
1250		68	69	72	73	73	80	79	78	73	71	71	70
1600		63	65	64	72	72	78	77	76	69	66	66	67
2000		63	66	68	71	73	79	75	73	69	66	65	65
2500		63	66	69	72	74	79	77	74	71	67	67	66
3150		63	65	67	70	74	78	76	74	69	65	65	65
4000		59	61	65	67	70	75	74	72	66	62	61	61
5000		58	59	64	66	68	74	72	70	64	61	60	61
6300		56	58	63	65	68	71	71	69	61	59	58	58
8000		57	59	63	66	67	70	70	69	62	59	58	59
10000		57	54	60	63	63	65	65	65	59	56	55	56
OVERALL		80	89	89	90	91	95	94	93	91	90	89	89

< LEVEL CORRECTED TO REMOVE BACKGROUND/ELECTRONIC NOISE.

TABLE: MEASURED SOUND PRESSURE LEVEL (DB)													IDENTIFICATION:
2 OCTAVE BAND													OMEGA 3.2
NOISE SOURCE/SUBJECT: (OPERATION:)													TEST 9A-000-002
MC-1 HEATER, DUCT TYPE, (3400 RPM)													RUN 01
PORTABLE ()													25 JAN 82
NEAR FIELD NOISE LEVELS ()													PAGE J1
LOCATION/CONDITION													
FREQ	DISTANCE (M)-->	+	4	4	4	4	4	4	4	4	4	4	4
(HZ)	ANGLE (DEG)-->	0	20	40	60	80	100	120	140	160	180	200	240
	CONDITION-->	A	A	A	A	A	A	A	A	A	A	A	A
31.5		87	87	86	86	85	84	82	82	84	81	82	84
63		78	78	81	82	83	82	82	83	84	83	81	82
125		82	81	74	76	76	75	77	78	79	79	78	77
250		83	82	80	77	75	79	76	80	78	79	77	80
500		80	78	78	75	72	72	71	73	72	71	71	73
1000		75	76	74	71	69	66	66	67	66	65	66	68
2000		75	75	73	70	69	62	63	63	53	62	63	65
4000		70	70	68	66	59	58	59	58	58	57	59	61
8000													60
OVERALL		81	80	89	88	88	87	85	87	88	87	86	88

TABLE: MEASURED SOUND PRESSURE LEVEL (DB)														IDENTIFICATION:	
2														OMEGA 3.2	
NOISE SOURCE/SUBJECT:														TEST BA-000-002	
MC-1 HEATER, DUCT TYPE, 3400 RPM														PUN 02	
PORTABLE														25 JAN 82	
NEAR FIELD NOISE LEVELS														PAGE J2	
LOCATION/CONDITION															
FREQ	DISTANCE (M)-->	4	4	4	4	4	2	2	2	2	2	2	2	2	2
(HZ)	ANGLE (DEG)-->	260	280	300	320	340	0	20	40	60	80	100	120	140	
	CONDITION----	A	A	A	A	A	A	A	A	A	A	A	A	A	
31.5															
63		85	86	87	86	86	90	89	88	86	85	85	84		
125		80	80	82	83	81	83	82	83	81	79	82	86		
250		78	78	78	79	81	89	87	86	84	81	81	78	79	
500		78	78	73	81	84	87	88	86	80	81	81	83	93	
1000		73	75	76	78	78	85	84	82	77	76	76	75	76	
2000		68	70	73	76	78	83	81	79	74	71	71	71	70	
4000		65	67	70	73	76	81	79	77	71	68	67	67	67	
8000		60	62	67	70	71	74	74	73	66	63	62	62	62	
OVERALL		88	88	89	90	91	95	94	93	91	90	89	89	90	

TABLE 1 MEASURED SOUND PRESSURE LEVEL (D3)											IDENTIFICATION#
2 OCTAVE BAND											
NOISE SOURCE/SUBJECT: (OPERATION#)											
MC-1 HEATER, JUCT TYPE, (3400 RPM)											OMEGA 3.2
PORTABLE ()											TEST 9A-003-002
NEAR FIELD NOISE LEVELS ()											RUN 03
()											25 JAN 82
()											PAGE J3
LOCATION/CONDITION											OPERATOR LOCATION
FREQ	DISTANCE (M)-->	2	2	2	2	2	2	2	2	2	TEST CONDITION
(HZ)	ANGLE (DEG)-->	160	180	200	220	240	260	280	300	320	1/A
	CONDITION----	A	A	A	A	A	A	A	A	A	
31.5											
63		45	86	87	85	86	87	87	88	88	92
125		89	89	89	86	86	84	81	81	82	93
250		93	89	84	81	80	80	81	81	94	92
500		83	83	87	85	81	82	81	90	92	88
1000		77	76	77	76	77	78	77	78	83	81
2000		70	69	71	71	71	72	73	75	80	75
4000		67	67	68	69	69	70	70	75	79	71
8000		63	62	63	64	64	64	64	69	73	66
OVERALL		92	92	93	91	90	90	90	90	92	98

TABLE: MEASURES OF HUMAN NOISE EXPOSURE													IDENTIFICATION:
3													OMEGA 3.2
NOISE SOURCE/SUBJECT: (OPERATION:)													TEST 9A-000-002
MC-1 HEATER, DUCT TYPE, (3400 RPM)													RUN 01
PORTABLE ()													25 JAN 82
NEAR FIELD NOISE LEVELS ()													PAGE M1
LOCATION/CONDITION													
DISTANCE (M)-->	4	4	4	4	4	4	4	4	4	4	4	4	
ANGLE (DEG)-->	0	20	40	60	80	100	120	140	160	180	200	220	240
CONDITION----	A	A	A	A	A	A	A	A	A	A	A	A	A
HAZARD/PROTECTION													
C-WEIGHTED OVERALL SOUND LEVEL (OASLC IN DB) AT EAR													
A-WEIGHTED OVERALL SOUND LEVEL (OASLA IN DB) AT EAR													
MAXIMUM PERMISSIBLE TIME (T IN MINUTES) FOR ONE EXPOSURE PER DAY (AFR 161-35, JULY 73)													
NO PROTECTION													
OASLC	90	89	89	88	87	87	86	87	98	87	86	87	88
OASLA	85	84	83	80	73	78	77	80	79	79	78	80	79
T	404	403	571	900	960	960	960	960	960	960	960	960	960
MINIMUM QPL EAR MUFFS													
OASLA*	65	64	64	64	64	64	63	64	65	64	62	64	64
T	960	960	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS													
OASLA*	62	61	61	60	60	59	59	59	61	59	58	60	60
T	960	960	960	960	960	960	960	960	960	960	960	960	960
V-51R EAR PLUGS													
OASLA*	62	60	59	56	55	56	55	57	57	57	56	57	57
T	960	960	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS PLUS V-51R EAR PLUGS													
OASLA*	48	46	46	44	43	43	42	43	44	43	42	43	44
T	960	960	960	960	960	960	960	960	960	960	960	960	960
H-133 GROUND COMMUNICATION UNIT													
OASLA*	59	57	57	55	54	53	53	54	55	53	52	54	55
T	960	960	960	960	960	960	960	960	960	960	960	960	960
COMMUNICATION													
PREFERRED SPEECH INTERFERENCE LEVEL (PSIL IN DB)													
PSIL	80	78	77	74	73	72	71	73	72	72	71	74	73
ANNOYANCE													
PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT IN PNDB)													
TONE CORRECTION (C IN DB)													
PNLT	130	98	98	95	93	94	92	94	93	93	92	94	93
C	1	1	1	1	1	2	1	1	1	1	1	1	1

* BASED ON CALCULATED SPL SPECTRUM UNDER PROTECTIVE DEVICE.

TABLE: MEASURES OF HUMAN NOISE EXPOSURE											IDENTIFICATION#
3											OMEGA 3.2
NOISE SOURCE/SUBJECT: (OPERATION:)											TEST 9A-000-002
MC-1 HEATER, DUCT TYPE, (3400 RPM)											RUN 03
PORTABLE ()											25 JAN 82
NEAR FIELD NOISE LEVELS ()											PAGE 11
LOCATION/CONDITION											OPERATOR LOCATION
DISTANCE (M)-->	2	2	2	2	2	2	2	2	2	2	TEST CONDITION
ANGLE (DEG)-->	160	180	200	220	240	260	280	300	320	340	1/A
CONDITION-->	A	A	A	A	A	A	A	A	A	A	
HAZARD/PROTECTION											
C-WEIGHTED OVERALL SOUND LEVEL (OASLC IN DBC) AT EAR											
A-WEIGHTED OVERALL SOUND LEVEL (OASLA IN DBA) AT EAR											
MAXIMUM PERMISSIBLE TIME (T IN MINUTES) FOR ONE EXPOSURE PER DAY (AFR 161-35, JULY 73)											
NO PROTECTION											
OASLC	92	92	93	91	90	90	90	90	92	94	97
OASLA	83	84	85	84	82	83	83	84	88	90	89
T	571	490	404	480	673	571	571	480	240	173	202
MINIMUM SPL EAR MUFFS											
OASLA*	63	69	70	68	67	66	65	65	67	69	74
T	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS											
OASLA*	64	65	65	63	63	62	62	62	63	65	70
T	950	960	960	960	960	960	960	960	960	960	960
V-51R EAR PLUGS											
OASLA*	61	62	63	62	60	60	60	60	63	60	66
T	960	960	960	960	960	960	960	960	960	960	960
AMERICAN OPTICAL 1700 EAR MUFFS PLUS V-51R EAR PLUGS											
OASLA*	48	48	49	47	46	47	46	46	50	51	53
T	950	960	960	960	960	960	960	960	960	960	960
H-133 GROUND COMMUNICATION UNIT											
OASLA*	55	59	59	57	57	57	57	58	61	63	64
T	960	960	960	960	960	960	960	960	960	960	960
COMMUNICATION											
PREFERRED SPEECH INTERFERENCE LEVEL (PSIL IN DB)											
PSIL	77	76	73	78	76	77	77	76	42	85	81
ANNOYANCE											
PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT IN PNOB)											
TONE CORRECTION (C IN DB)											
PNLT	99	99	100	98	97	97	96	99	113	105	104
C	2	1	1	1	1	1	1	1	2	1	1

* BASED ON CALCULATED SPL SPECTRUM UNDER PROTECTIVE DEVICE.

TABLE: MEASURED SOUND PRESSURE LEVEL (DB)																			IDENTIFICATION:																								
4 1/3 OCTAVE BAND																			OMEGA 1.4																								
DISTANCE = 10 METERS																			TEST BA-000-002																								
NOISE SOURCE/SUBJECT:																			OPERATION:	METEOROLOGY:				RUN 01																			
MC-1 HEATER, DUCT TYPE,																			3400 RPM				TEMP = 29 C				25 JAN 82																
PORTABLE																							BAR PRESS = .761 M HG																				
FAR FIELD NOISE LEVELS																							REL HUMID = 69 %				PAGE 2																
FREQ (HZ)																			ANGLE (DEGREES)																								
																				0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180					
25																																											
31.5																																											
40																																											
50																			77<	76<	75<	75<	76<	75<	74<	74<	74<	74<	74<	73<	73<	72<	71<										
63																			77<	77<	76<	75<	76<	75<	75<	74<	75<	75<	73<	74<	73<	73<					72<						
80																																											
100																			66<	67<	70<	69<	70<	70<	72<	73	73	72	72<	70<	66<	66<	70<	65<	65<	67<	67<	67<	67<	67<	67<	67<	
125																			72	70<	76<	71<	73	74	75	76	75	74	73	72	72<	73	72	72<	71<	71<	71<	71<	71<	71<	71<	71<	
160																			72	71	72	73	74	75	76	77	76	79	78	76	71	69<	71	74	75	76	75	75	75	75	75	75	
200																			70	71	70	69	68	69	70	70	70	69	68	66	63	65<	65<	68	69	71	71	71	71	71	71	71	71
250																			69	70	70	69	69	69	69	71	70	69	69	69	70	71	68	69	70	71	71	71	71	71	71	71	71
315																			71	68	67	67	68	69	70	70	68	67	67	67	66	66	67	68	68	69	68	68	68	68	68	68	68
400																			70	68	67	65	64	64	62	64	65	66	65	68	64	67	65	67	66	67	66	67	66	67	66	67	66
500																			66	69	69	70	69	66	65	64	62	63	64	63	67	66	65	67	67	66	66	66	66	66	66	66	66
630																			70	68	67	65	65	64	65	64	63	63	65	64	64	65	65	65	63	62	62	63	62	63	62	63	62
800																			67	68	66	64	62	62	62	62	60	61	62	60	61	61	62	63	62	60	59	60	59	60	59	60	59
1000																			67	68	67	64	65	64	62	60	61	60	61	64	62	61	62	61	60	59	58	59	58	59	58	59	58
1250																			65	65	64	64	64	64	62	61	60	57	58	59	57	58	57	58	57	56	57	57	56	57	56	57	
1600																			66	66	64	61	61	62	62	59	56	56	54	55	55	56	55	55	54	54	54	53	54	53	54	53	54
2000																			64	64	63	61	60	60	60	58	56	56	54	55	54	56	55	55	54	54	54	52	54	53	54	52	53
2500																			63	60	61	60	60	60	58	58	56	55	53	52	52	52	51	52	51	51	51	49	51	49	51	49	50
3150																			64	62	61	60	59	59	58	58	56	53	52	52	52	53	52	52	53	51	50	51	49	50	48	50	49
4000																			62	60	61	60	59	59	57	57	55	51	50	49	49	49	49	49	49	49	48	49	47	48	46	48	47
5000																			61	60	60	60	58	58	55	55	53	50	49	49	49	49	48	49	49	49	47	48	45	48	46	48	45
6300																			59	57	57	57	55	55	52	53	51	49	48	47	47	47	46	46	47	46	46	46	45	46	45	46	45
8000																			59	59	59	59	58	58	55	55	52	48	49	49	49	49	48	48	48	48	46	48	46	48	45	48	45
10000																			55	54	54	54	54	53	50	50	47<	42<	43<	42<	42<	42<	42<	42<	42<	41<	41<	41<	39<	41<	39<	41<	39<
OVERALL																			83	83	82	82	82	83	83	83	83	83	82	82	81	80	78	80	79	80	80	80	80	80	80	80	80

< LEVEL CORRECTED TO REMOVE BACKGROUND/ELECTRONIC NOISE.

15

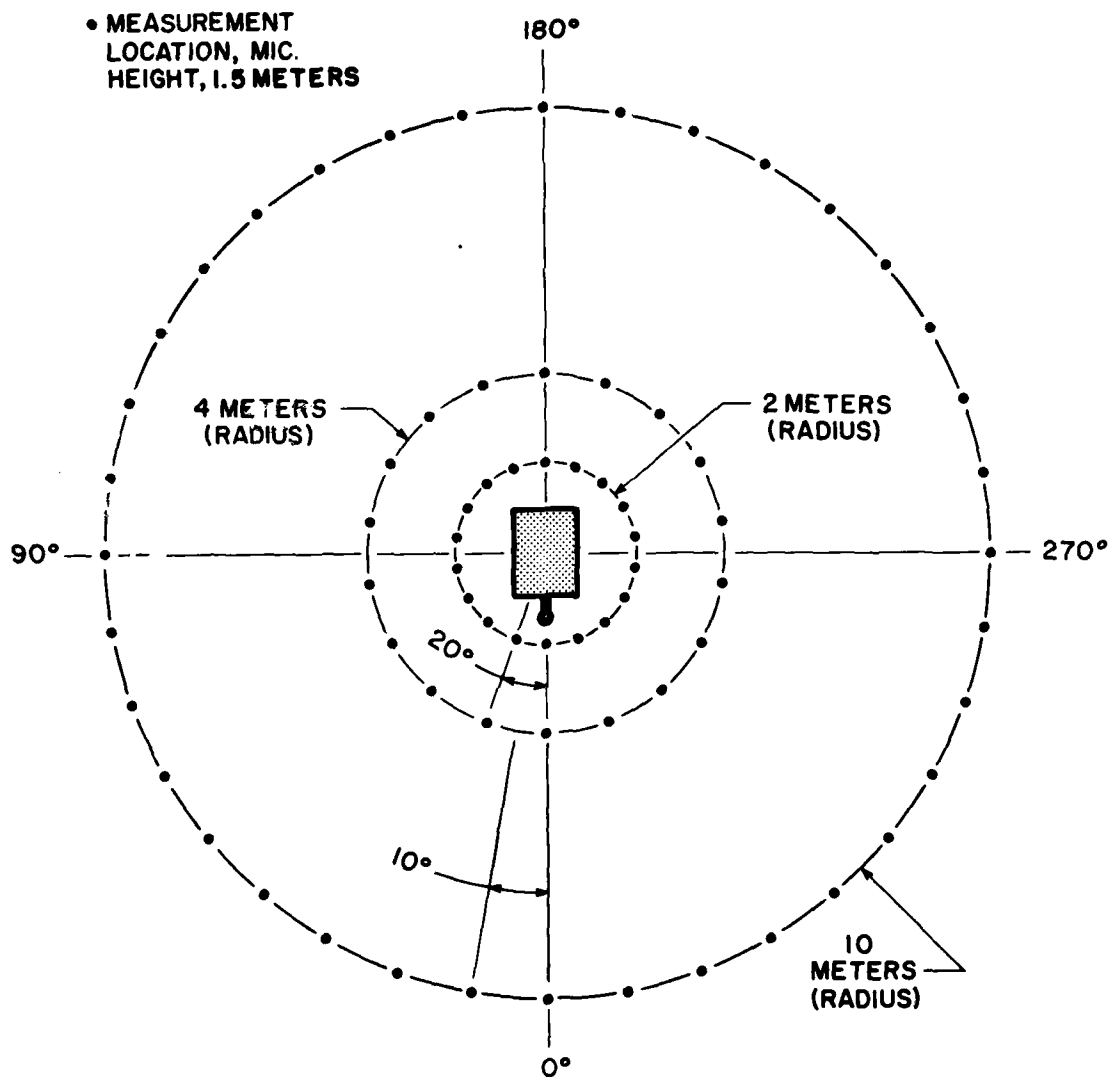


Figure 1. Measurement Locations

FIGURE 1 NORMALIZED FARFIELD NOISE LEVELS

2

DISTANCE = 10 METERS





IDENTIFICATION

OMEGA 1.4
TEST RA-001-002
RUN 01
25 JAN 82
PAGE 4

NOISE SOURCE/SUBJECT:
HC-1 HEATER, DUCT TYPE,
PORTABLE
FAR FIELD NOISE LEVELS

OPERATION:
3400 RPM

METEOROLOGICAL:
TEMP = 15 C
BAR PRESS = 1060 MM HG
REL HUMID = 70 %

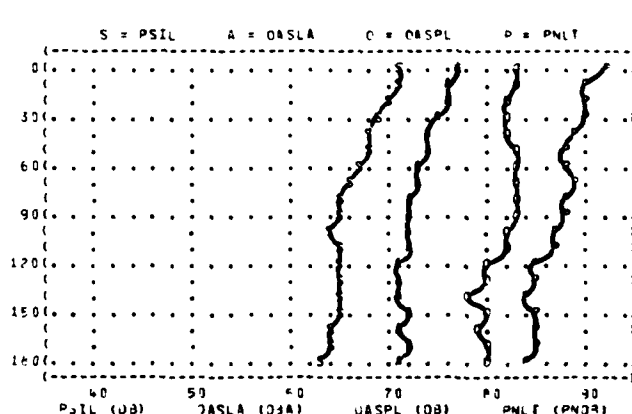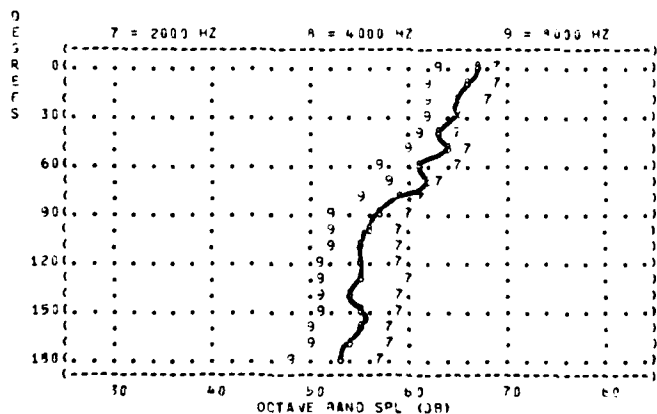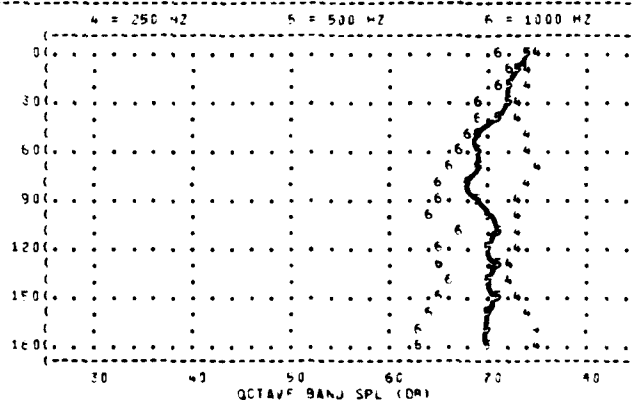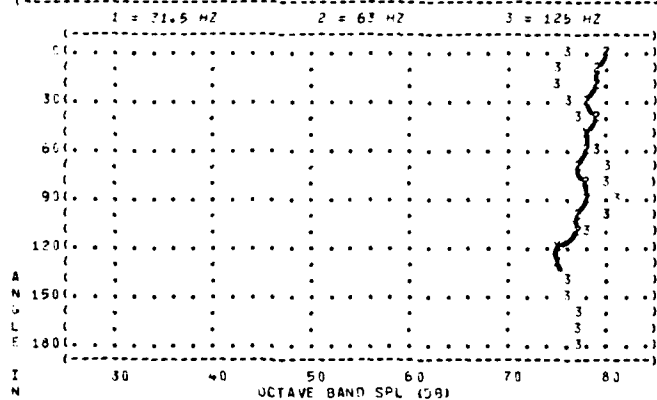

IDENTIFICATIONS

1. OMEGA 1.6

```

) OMEGA 1.4
-1 TEST 9A-000-002
) RUN 32
)
) 25 JAN 82
)
) PAGE 4

```

6 = 1000 - 42


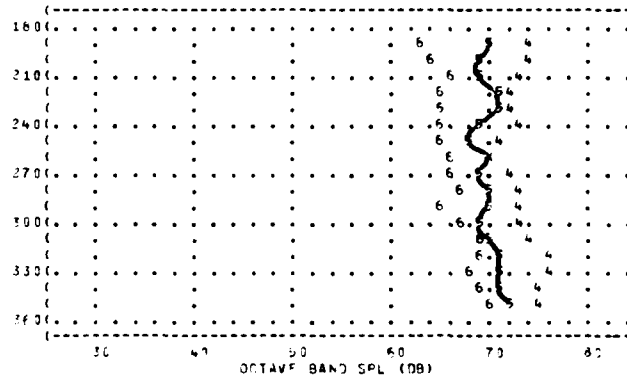


Figure 1 consists of four vertical plots showing the vertical distribution of parameters S, A, G, and P. The y-axis for all plots represents depth in meters, ranging from 100 to 1600. The x-axes represent the parameters: PSIL (DB), DASLA (DB), GASPL (DB), and PNLT (PNJR). The plots show data points and fitted curves for each parameter.


FIGURE: OVERALL SOUND PRESSURE LEVEL (OASPL)
 3 EQUAL LEVEL CONTOURS (dB)

IDENTIFICATION:
 OMEGA 1.4
 TEST 9A-000-002
 RUN 01
 25 JAN 82
 PAGE 11


NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:
 MC-1 HEATER, JUCT TYPE, (3400 RPM) TEMP = 15 C
 PORTABLE () BAR PRESS = .760 M HG
 FAR FIELD NOISE LEVELS () REL HUMID = 70 %

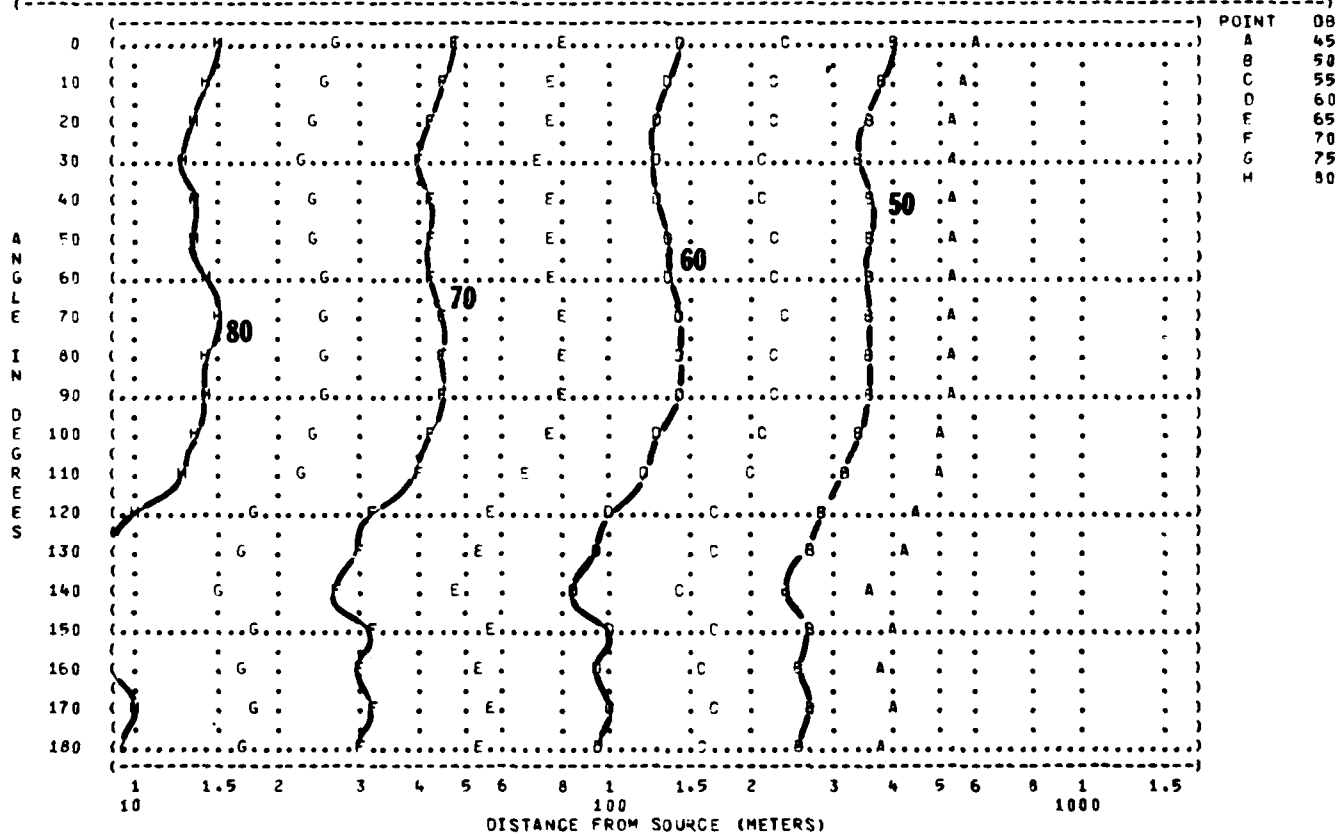


(FIGURE: OVERALL SOUND PRESSURE LEVEL (OASPL))
 (3 EQUAL LEVEL CONTOURS (DB))
 (IDENTIFICATION:)
 () OMEGA 1.4)
 (TEST BA-000-002)
 (NOISE SOURCE/SUBJECT: (OPERATIONS:) METEOROLOGY:)
 (MC-1 HEATER, DUCT TYPE, (3400 RPM) TEMP = 15 C)
 (PORTABLE () BAR PRESS = .760 M HG)
 (FAR FIELD NOISE LEVELS () REL HUMID = 70 %)
 () PAGE 11)

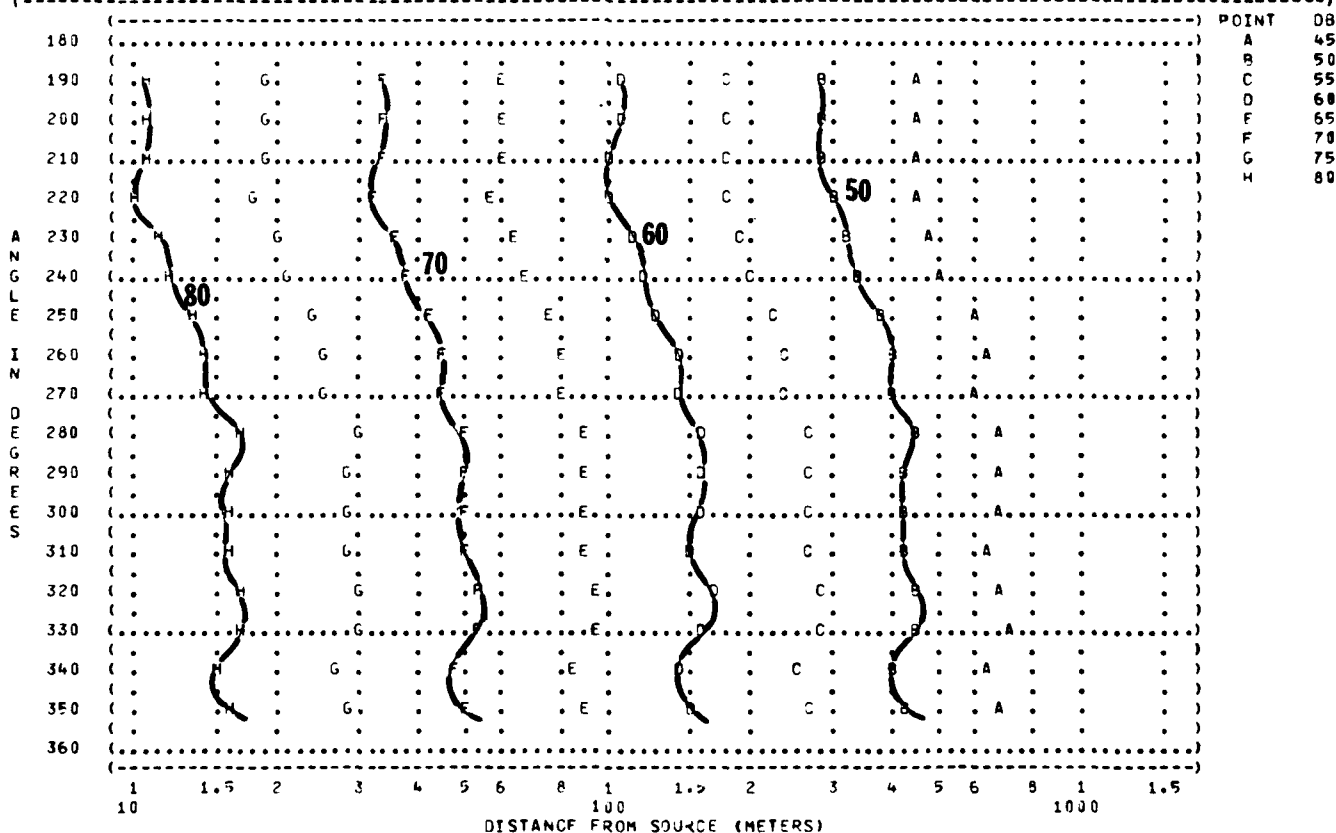

(FIGURE: C-WEIGHTED OVERALL SOUND LEVEL (OASLC))
 (4 EQUAL LEVEL CONTOURS (DNC))
 (IDENTIFICATION:)
 ()
 () OMEGA 1.4)
 () TEST RA-000-032)
 () RUN 01)
 () 25 JAN 82)
 () PAGE 12)
 (NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:)
 (MC-1 HEATER, DUCT TYPE, (3400 RPM) TEMP = 15 C)
 (PORTABLE) BAR PRESS = .750 M HG)
 (FAP FIELD NOISE LEVELS () REL HUMID = 70 %)

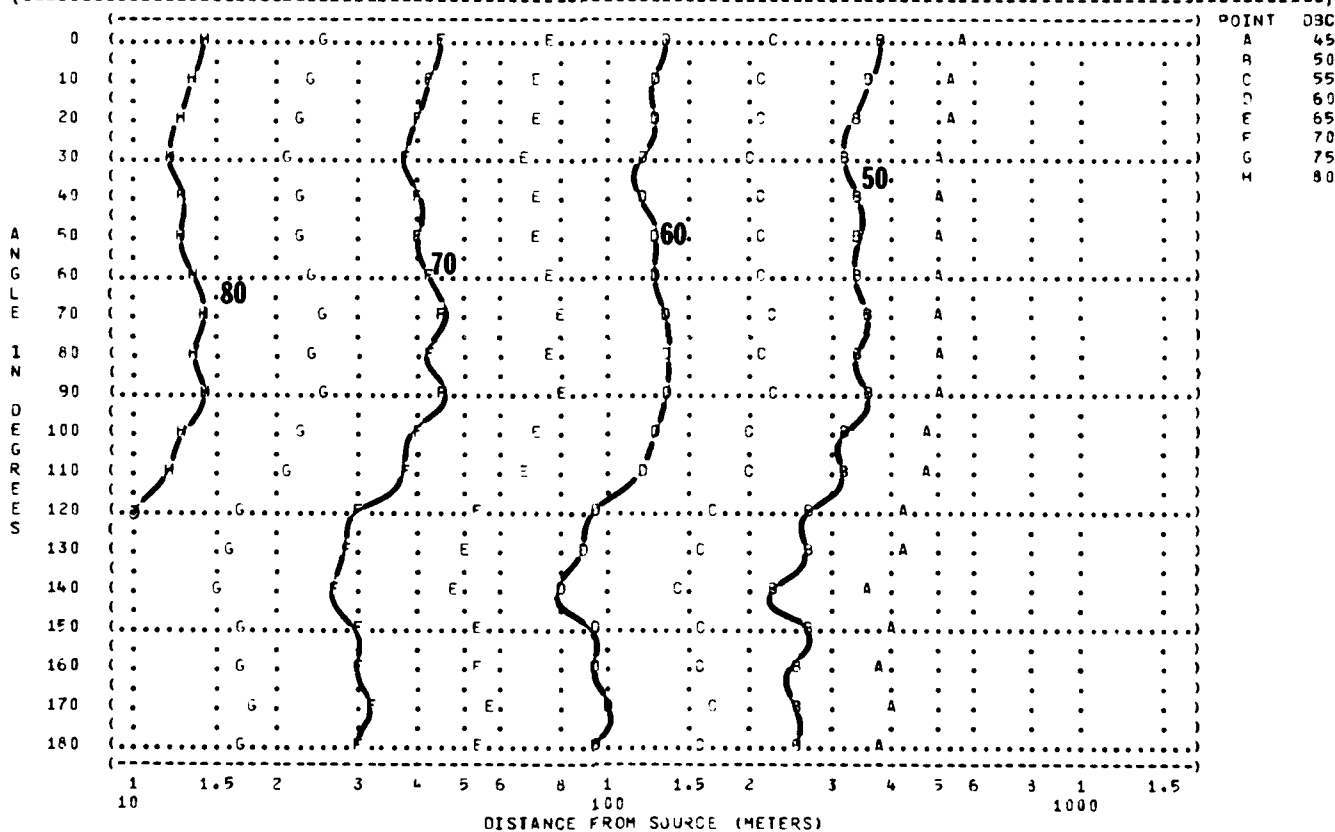

(FIGURE: C-WEIGHTED OVERALL SOUND LEVEL (OASLC) (4 EQUAL LEVEL CONTOURS (ELC)			) IDENTIFICATION:)) OMEGA 1.4)) TEST BA-900-002)) RUN 02)) 25 JAN 82)) PAGE 12)
(NOISE SOURCE/SUBJECT:) (MC-1 HEATER, DUCT TYPE,) (PORTABLE) (FAR FIELD NOISE LEVELS)	(OPERATIONS:) (3400 RPM)	) METEOROLOGY:)) TEMP = 15 C)) BAR PRESS = .760 M HG)) REL HUMID = 70 %)	

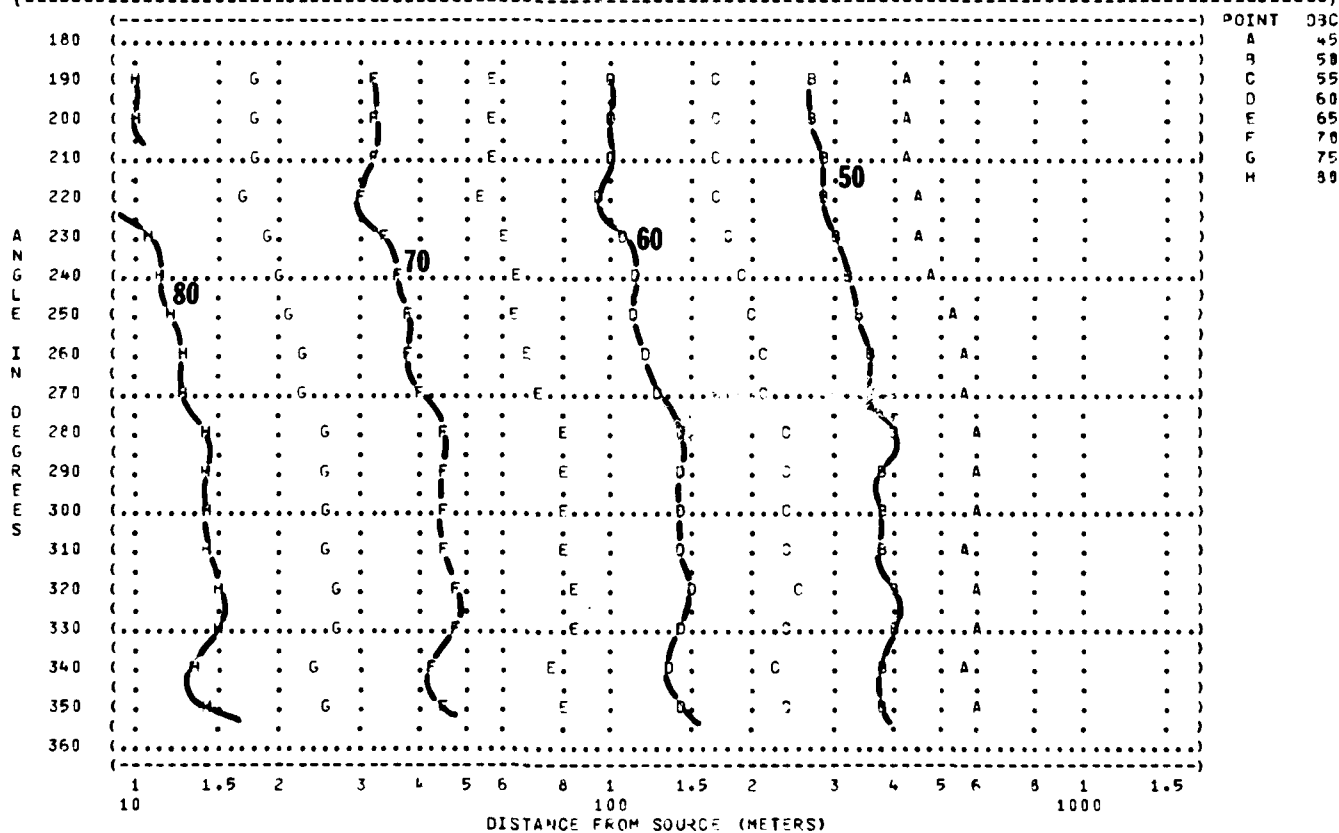

(FIGURE: A-WEIGHTED OVERALL SOUND LEVEL (OASLA)			) IDENTIFICATION:)	
(5 EQUAL LEVEL CONTOURS (DBA)			))	
()			) OMEGA 1.4)	
()			) TEST BA-000-002)	
(NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:)			) RUN 01)	
(MC-1 HEATER, JET TYPE, (3400 RPM)			) TEMP = 15 C)	
(PORTABLE ()			) BAR PRESS = .760 M HG)	
(FAR FIELD NOISE LEVELS ()			) 25 JAN 82)	
()			) REL HUMID = 70 %)	
()			) PAGE 13)	

21


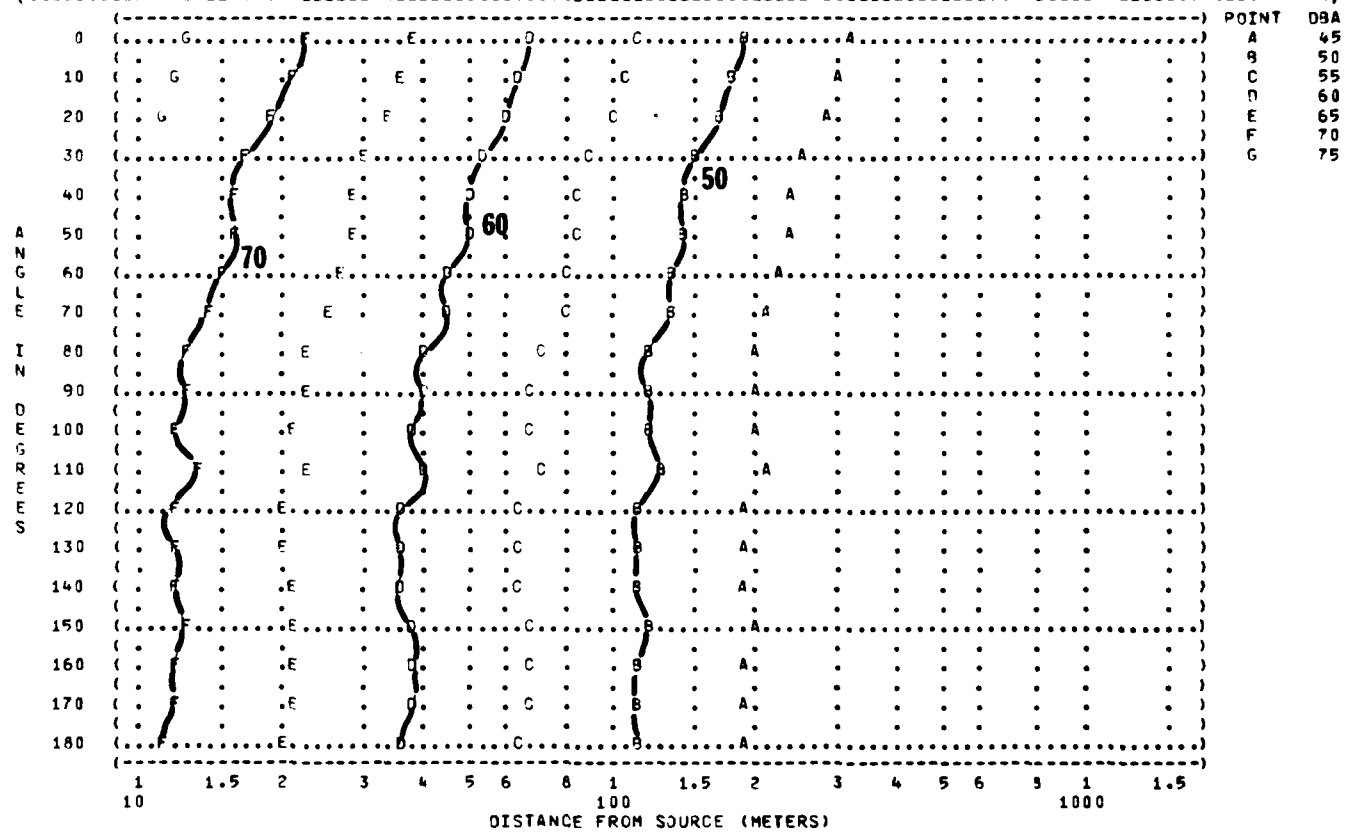


FIGURE 1 A-WEIGHTED OVERALL SOUND LEVEL (OASLA)
 5 EQUAL LEVEL CONTOURS (DBA)

IDENTIFICATION:
 OMEGA 1.4
 TEST BA-000-002
 RUN 02

NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:
 MC-1 HEATER, JUCT TYPE, (3400 RPM) TEMP = 15 C
 PORTABLE () BAR PRESS = .760 MM HG
 FAR FIELD NOISE LEVELS () REL HUMID = 70 %

25 JAN 82
 PAGE 13

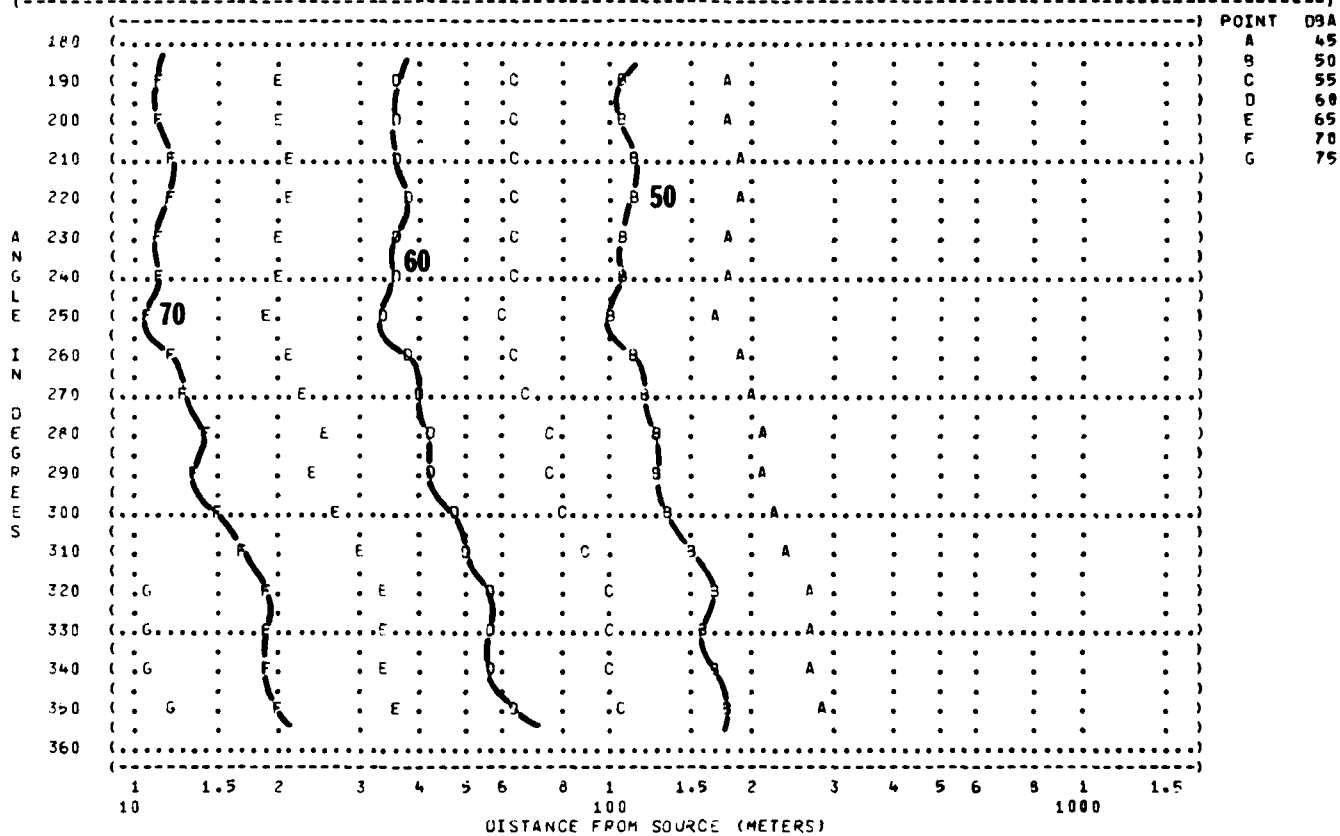

(FIGURE: PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT)) IDENTIFICATION:)
 (6 EQUAL LEVEL CONTOURS (PNDB)))
 (NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:) TEST RA-030-002)
 (MC-1 HEATER, DUCT TYPE, (3400 RPM) TEMP = 15 C) RUN 01)
 (PORTABLE () BAR PRESS = .750 M HG) 25 JAN 82)
 (FAR FIELD NOISE LEVELS () REL HUMID = 70 %))
 () PAGE 14)

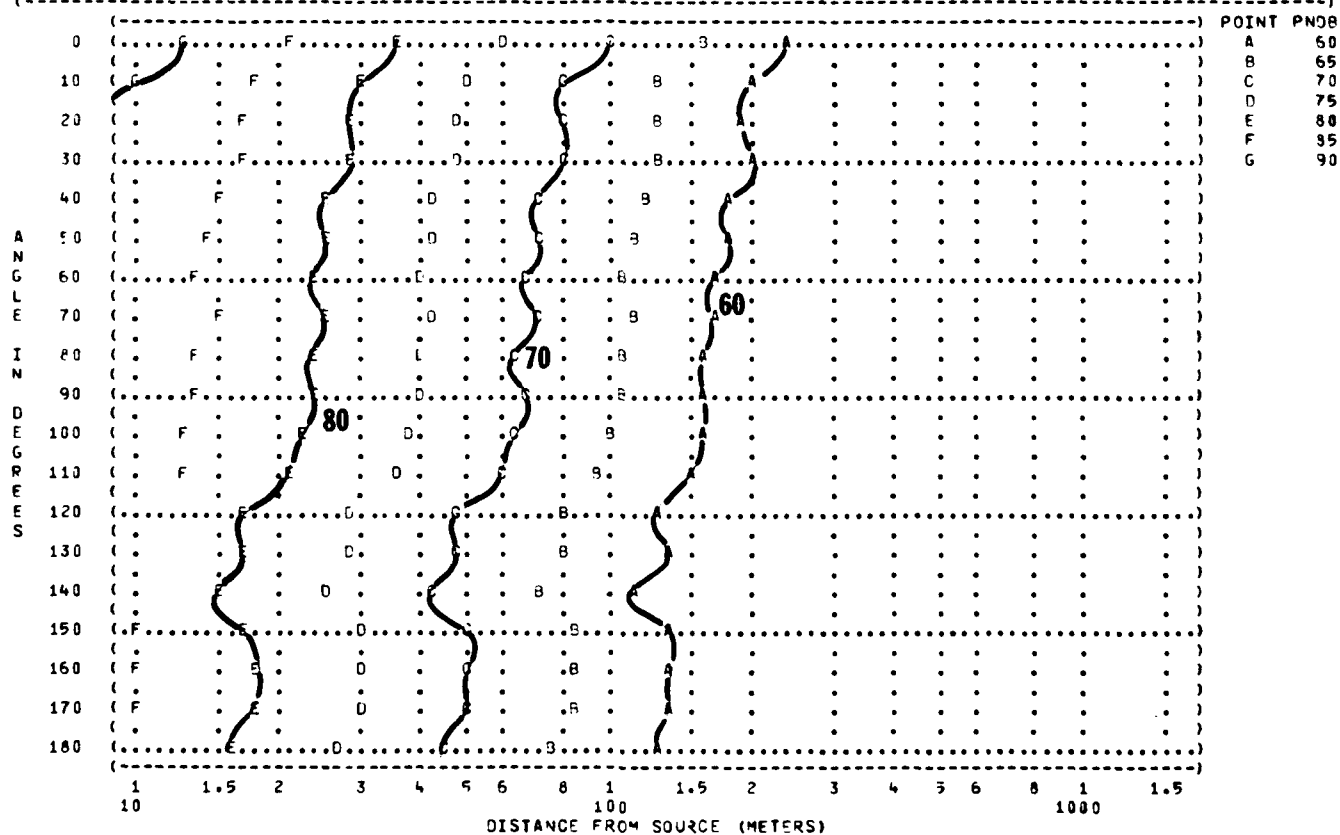


FIGURE: PERCEIVED NOISE LEVEL, TONE CORRECTED (PNLT)
 6 EQUAL LEVEL CONTOURS (PNDB)

IDENTIFICATION:
 OMEGA 1.4
 TEST BA-000-002
 RUN 02
 25 JAN 82
 PAGE 14

NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:
 MC-1 HEATER, DUCT TYPE, (3400 RPM) TEMP = 15 C
 PORTABLE () BAR PRESS = .760 M HG
 FAR FIELD NOISE LEVELS () REL HUMID = 70 %

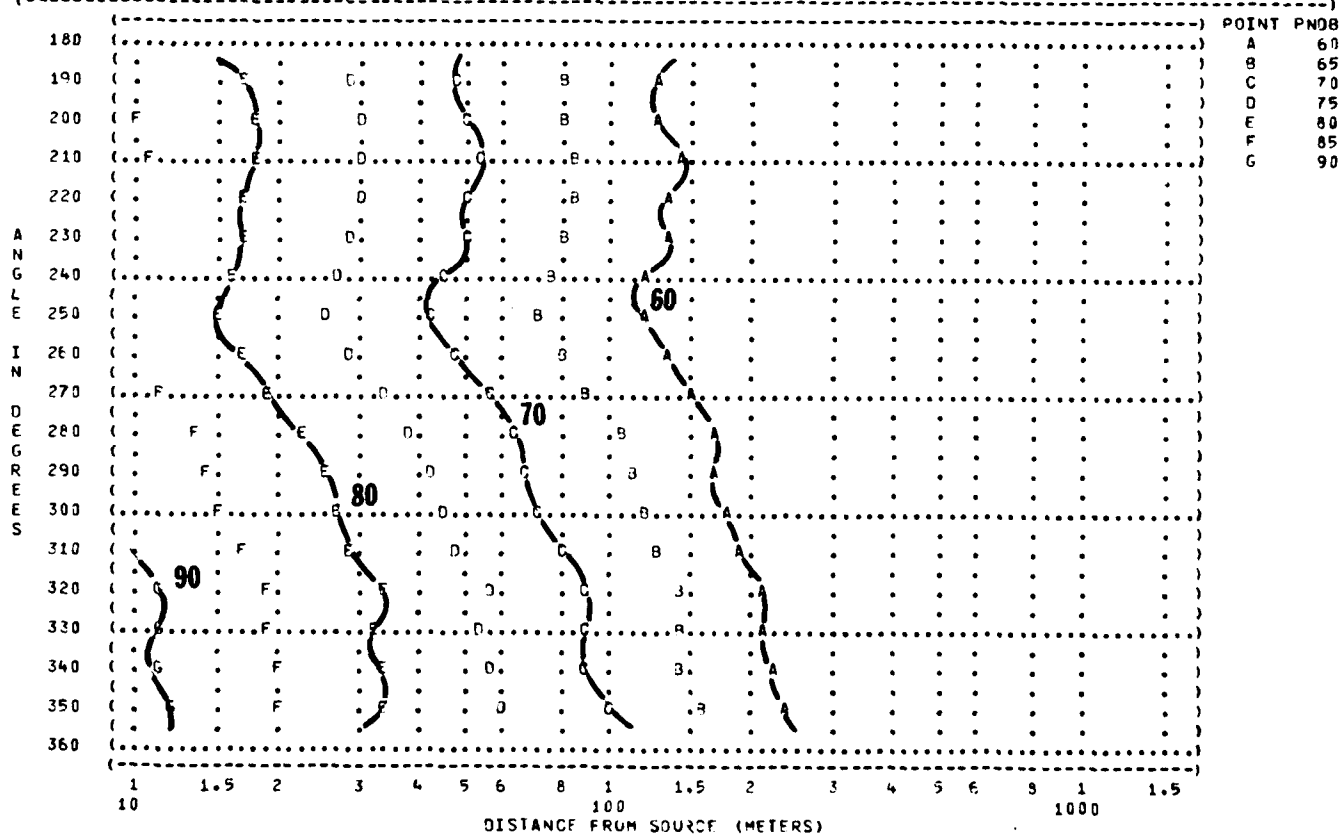


FIGURE 1 PREFERRED SPEECH INTERFERENCE LEVEL (PSIL)
EQUAL LEVEL CONTOURS (dB)

NOISE SOURCE/SUBJECT:
MC-1 HEATER, JUCI TYPE,
PORTABLE
FAR FIELD NOISE LEVELS

OPERATION:
3400 RPM

METEOROLOGY:
TEMP = 15 C
BAR PRESS = .760 M HG
REL HUMID = 70 %

IDENTIFICATION:
OMEGA 1.4
TEST RA-000-002
RUN 02
25 JAN 62
PAGE 15



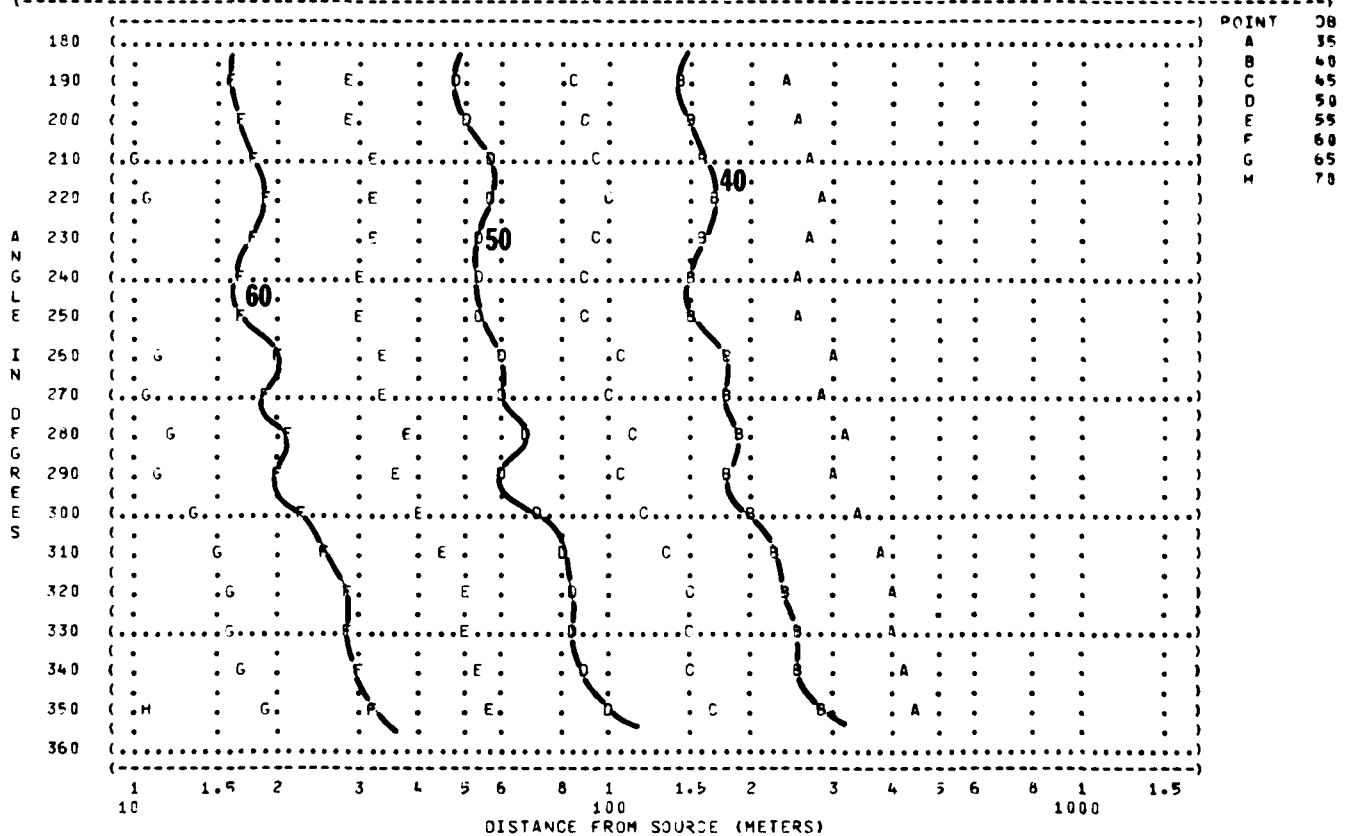


FIGURE 8 MAXIMUM PERMISSIBLE TIME (T) FOR ONE EXPOSURE PER DAY (AFR 101-35, JULY 73)			IDENTIFICATION:
EQUAL TIME CONTOURS (MINUTES)			
			OMEGA 1.4
			TEST RA-000-002
NOISE SOURCE/SUBJECT:	OPERATION:	METEOROLOGY:	RUN 02
MC-1 HEATER, DUCT TYPE,	3400 RPM	TEMP = 15 C	
PORTABLE		BAR PRESS = .760 M HG	25 JAN 82
FAR FIELD NOISE LEVELS		REL HUMID = 70 %	
			PAGE 5

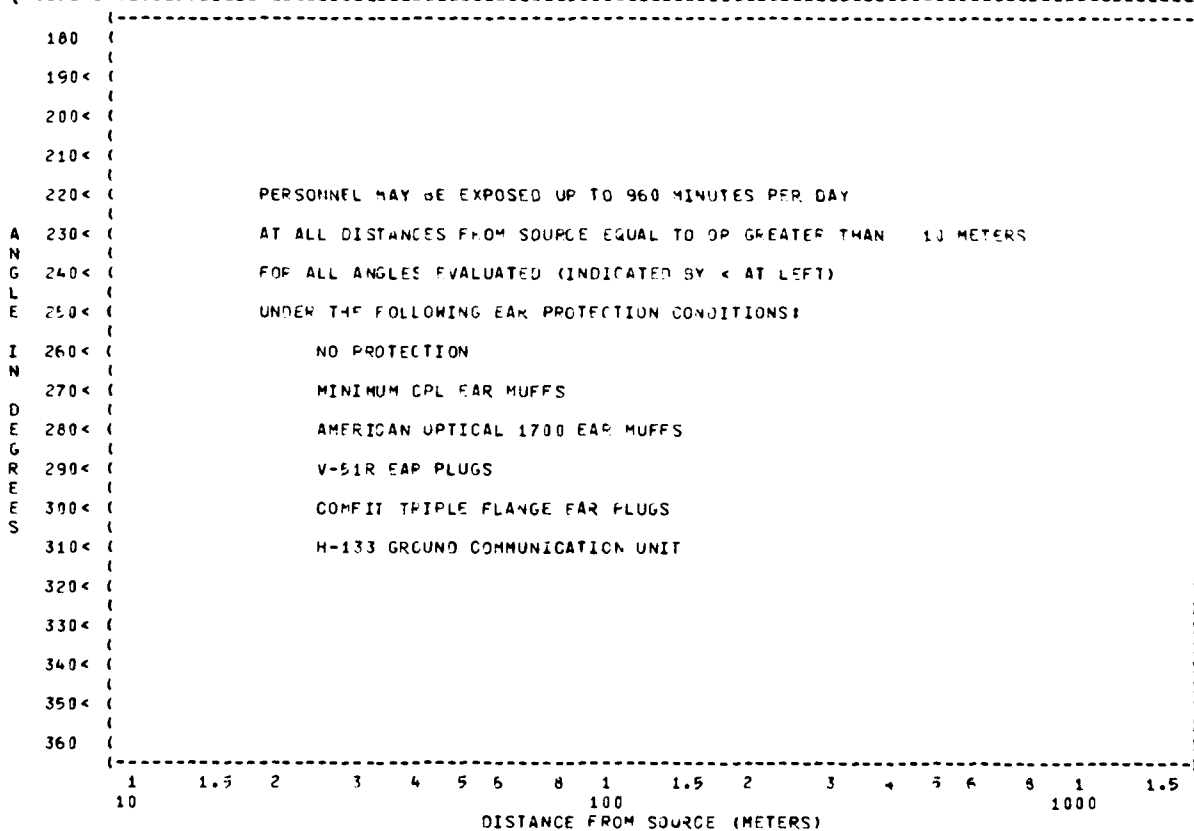


(FIGURE: SOUND PRESSURE LEVEL (SPL)) IDENTIFICATION:)
 (9 EQUAL LEVEL CONTOURS (L3)))
 (31.5 HZ OCTAVE BAND))
 (NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:)
 (MC-1 HEATER, DUCT TYPE, (3400 RPM) TEMP = 15 C)
 (PORTABLE () BAR PRESS = .760 M HG) 25 JAN 82)
 (FAR FIELD NOISE LEVELS () REL HUMID = 70 %)
 ())
 ()
 (NO CONTOUR DATA---EITHER NO INPUT DATA WERE COMPUTED (=9999.0))
 (OR MINIMUM CONTOUR LEVEL REQUESTED IS GREATER THAN MAXIMUM COMPUTED LEVEL.)
 ()
 ()

(FIGURE: SOUND PRESSURE LEVEL (SPL)			) IDENTIFICATION:	
(9 EQUAL LEVEL CONTOURS (DB)			)	
(63 HZ OCTAVE BAND			) OMEGA 1.4	
(NOISE SOURCE/SUBJECT:			) TEST BA 000-002	
(MC-1 HEATER, JUCT TYPE,			) RUN 02	
(PORTABLE			) 25 JAN 82	
(FAR FIELD NOISE LEVELS			) PAGE 17	
(OPERATION:			)	
(3400 RPM			)	
(METEOROLOGY:			)	
(TEMP = 15 C			)	
(BAR PRESS = .760 M HG			)	
(REL HUMID = 70 %			)	

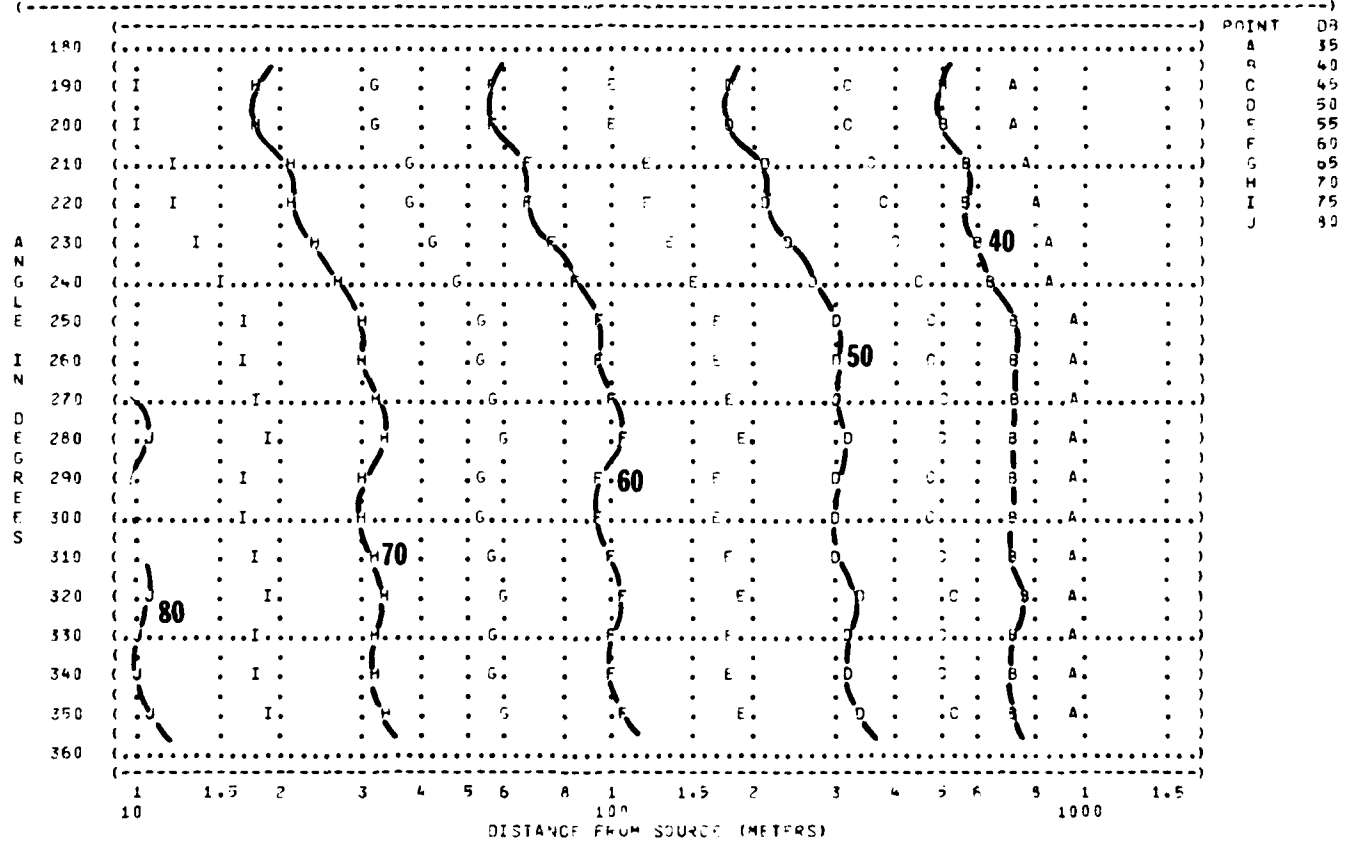

(FIGURE: SOUND PRESSURE LEVEL (SPL)) IDENTIFICATION:)
 (9 EQUAL LEVEL CONTOURS (dB)))
 (125 HZ OCTAVE BAND))
 (NOISE SOURCE/SUBJECT:) OPERATION:) METEOROLOGY:)
 (MC-1 HEATER, JET TYPE,) 3400 RPM) TEMP = 15 C)
 (PORTABLE)) BAR PRESS = .760 M HG)
 (FAR FIELD NOISE LEVELS)) REL HUMID = 70 %)
 ()) 25 JAN 82)
 ()) PAGE 13)

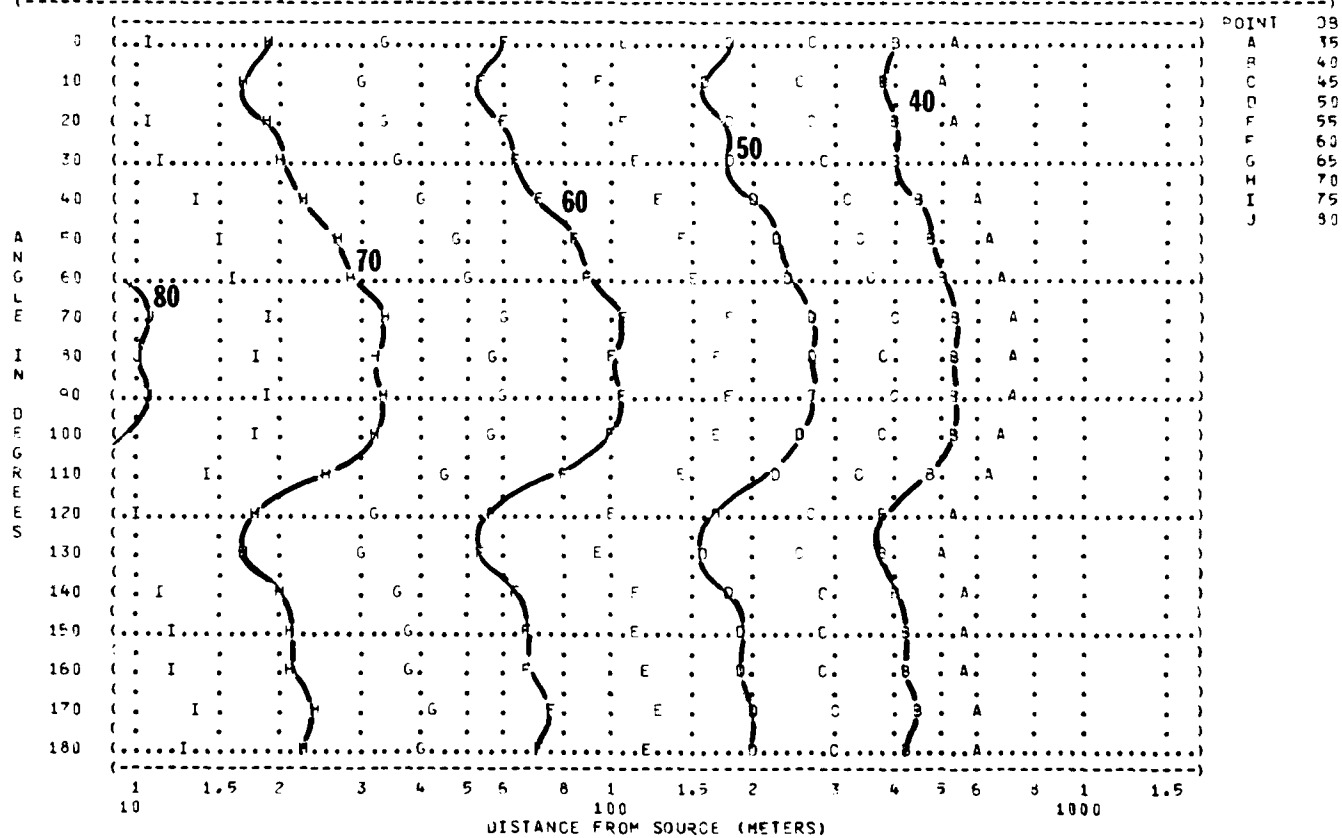

(FIGURE: SOUND PRESSURE LEVEL (SPL)
 (9 EQUAL LEVEL CONTOURS (dB)
 (125 HZ OCTAVE BAND

(IDENTIFICATION:)

() OMEGA 1.4

(TEST RA-000-002)

(RUN 02)

(NOISE SOURCE/SUBJECT:)
 (MC-1 HEATER, DUCT TYPE,)
 (PORTABLE)
 (FAR FIELD NOISE LEVELS)

(OPERATION:)
 (3400 RPM)

(METEOROLOGY:)


(TEMP = 15 C)

(BAR PRESS = .760 MM HG)


(REL HUMID = 70 %)

(25 JAN 62)


(PAGE 18)

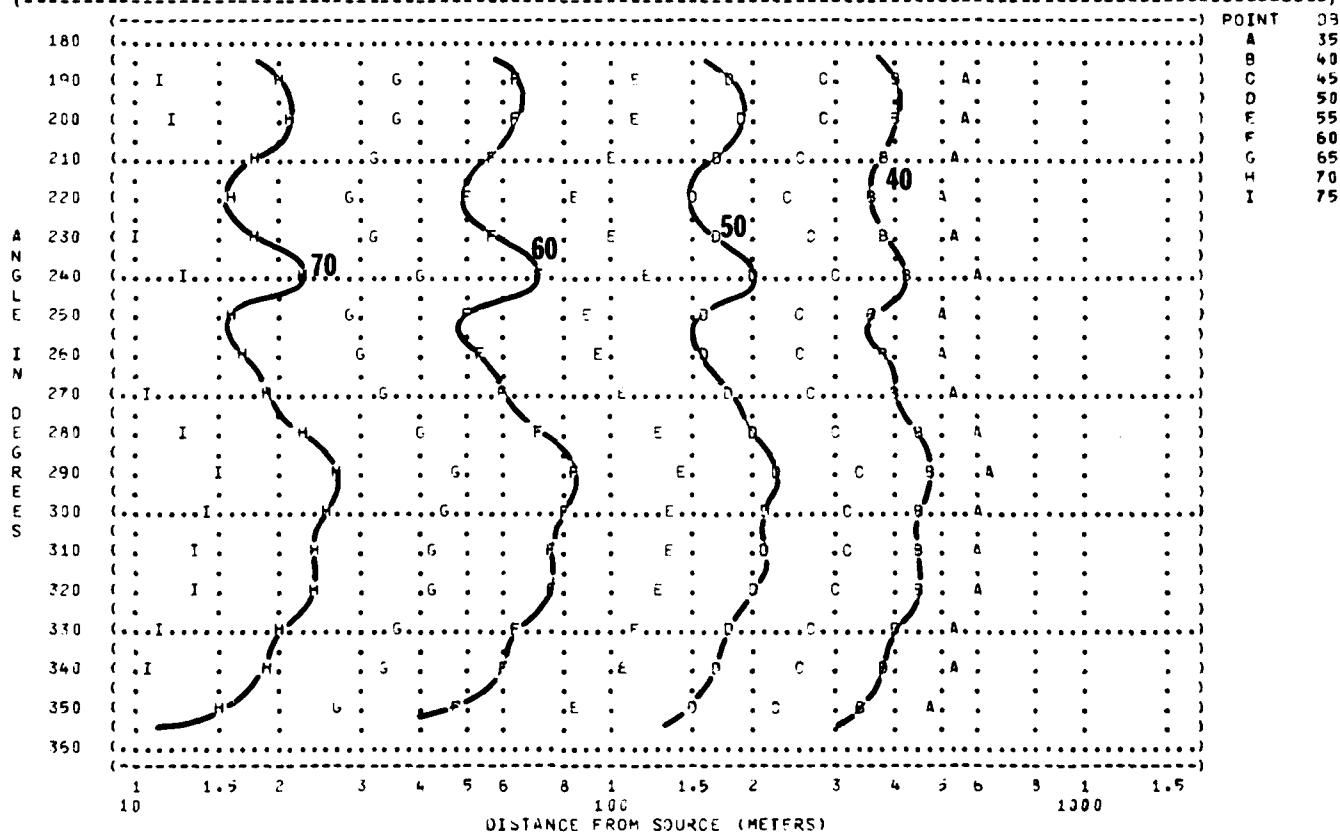

(FIGURE: SOUND PRESSURE LEVEL (SPL)) IDENTIFICATION:)
 (9 EQUAL LEVEL CONTOURS (dB)))
 (200 HZ OCTAVE BAND))
 (NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:) TEST RA-000-002)
 (MC-1 HEATER, DUCT TYPE, (3600 RPM) TEMP = 15 C) RUN 01)
 (PORTABLE () BAR PRESS = 1.760 M HG) 25 JAN 82)
 (FAR FIELD NOISE LEVELS () REL HUMID = 70 %))
 () PAGE 19)

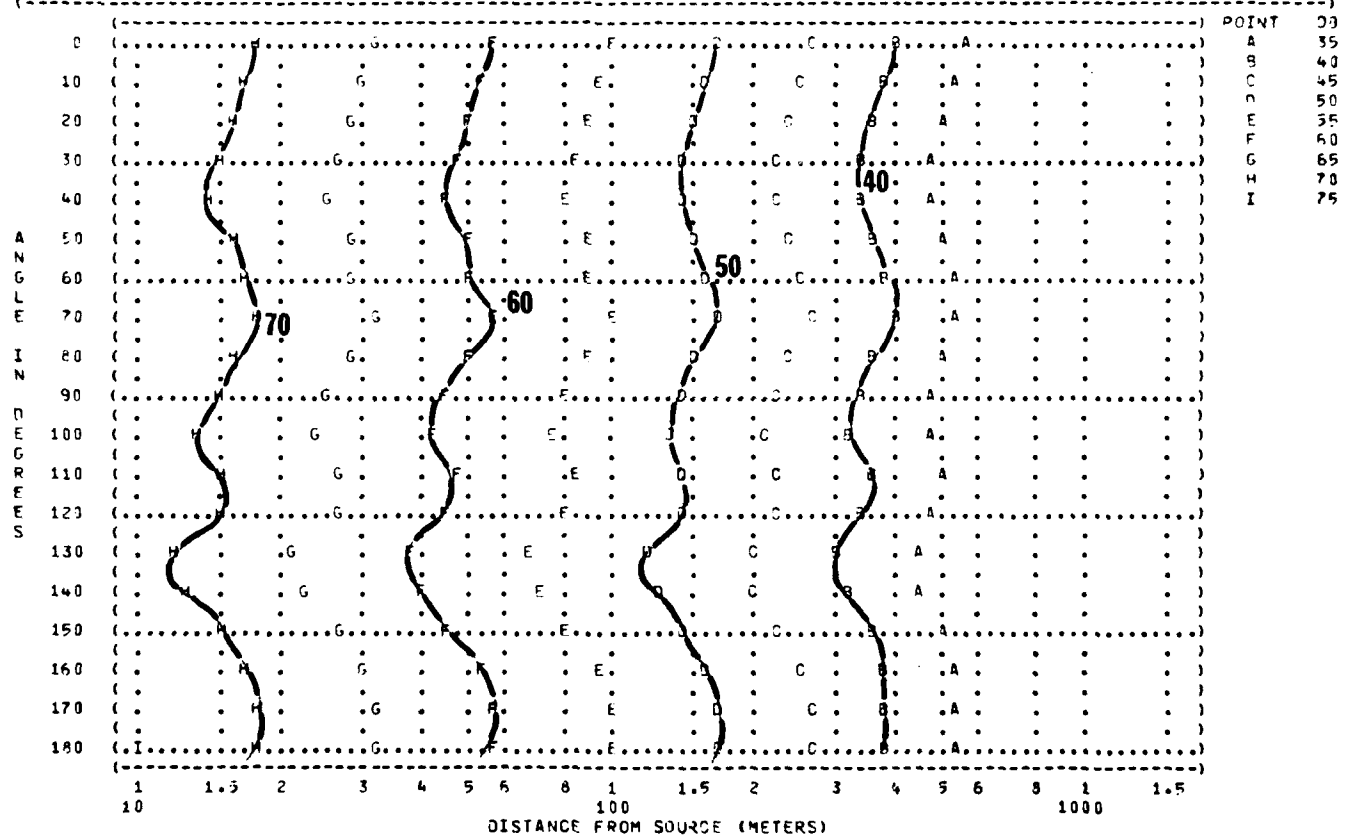

(FIGURE 9 SOUND PRESSURE LEVEL (SPL) EQUAL LEVEL CONTOURS (FB) 500 HZ OCTAVE BAND)			) IDENTIFICATION:)
(NOISE SOURCE/SUBJECT:)			) OMEGA 1.4)
(MC-1 HEATER, JUCT TYPE,)			) TEST BA-000-002)
(PORTABLE)			) RUN 01)
(FAR FIELD NOISE LEVELS)			) 25 JAN 82)
(OPERATION:)			) PAGE 20)
(3400 RPM)			)
(METEOROLOGICAL:)			)
(TEMP = 15 C)			)
(BAR PRESS = .760 MM HG)			)
(REL HUMID = 70 %)			)

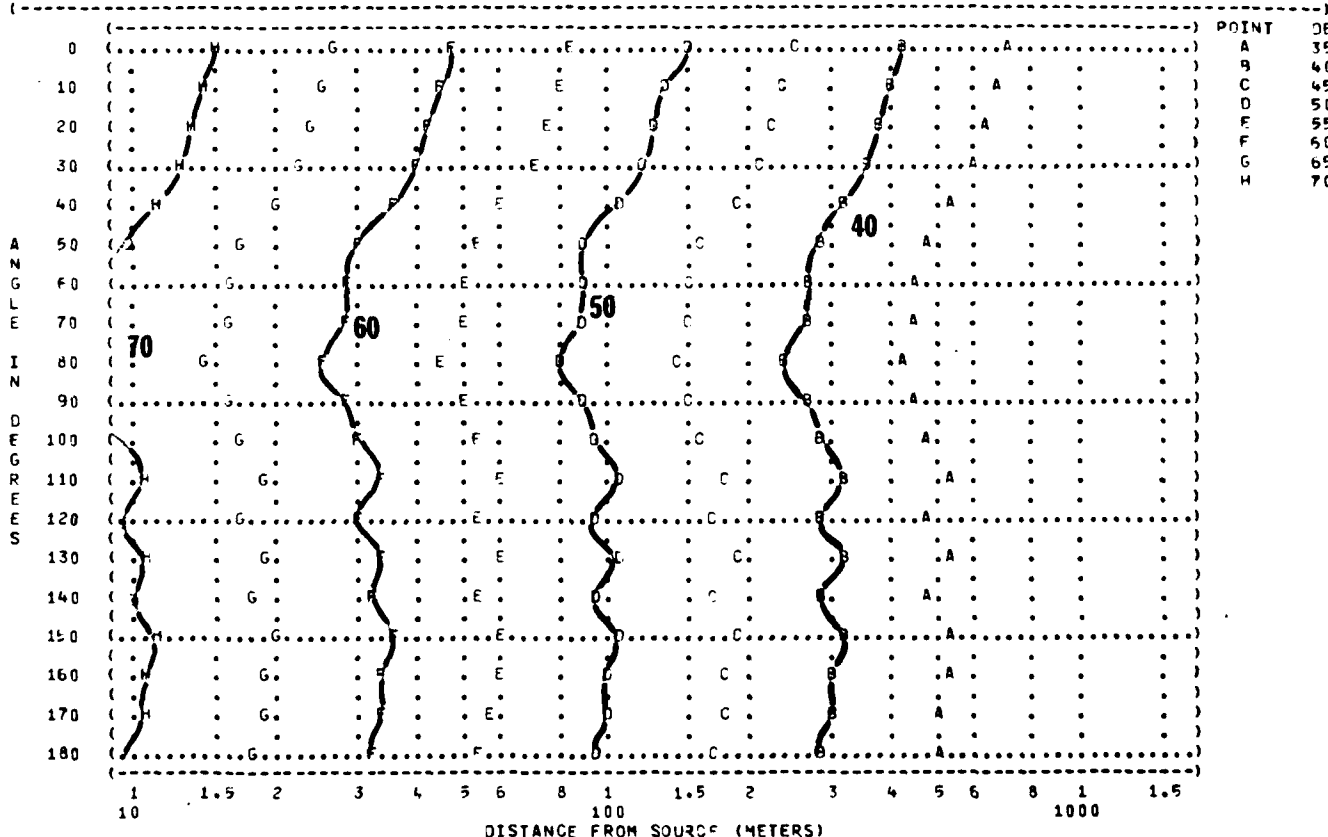

(FIGURE: SOUND PRESSURE LEVEL (SPL)			) IDENTIFICATION:)	
(9 EQUAL LEVEL CONTOURS (DB)			))	
(500 HZ OCTAVE BAND			) OMEGA 1.4)	
(NOISE SOURCE/SUBJECT:) OPERATION:) METEOROLOGY:) TEST RA-000-002)			) RUN 02)	
(MC-1 HEATER, DUCT TYPE,) 3400 RPM) TEMP = 15 C)			) 25 JAN 82)	
(PORTABLE)) BAR PRESS = .760 Hg)			))	
(FAR FIELD NOISE LEVELS)) REL HUMID = 70 %)			) PAGE 20)	



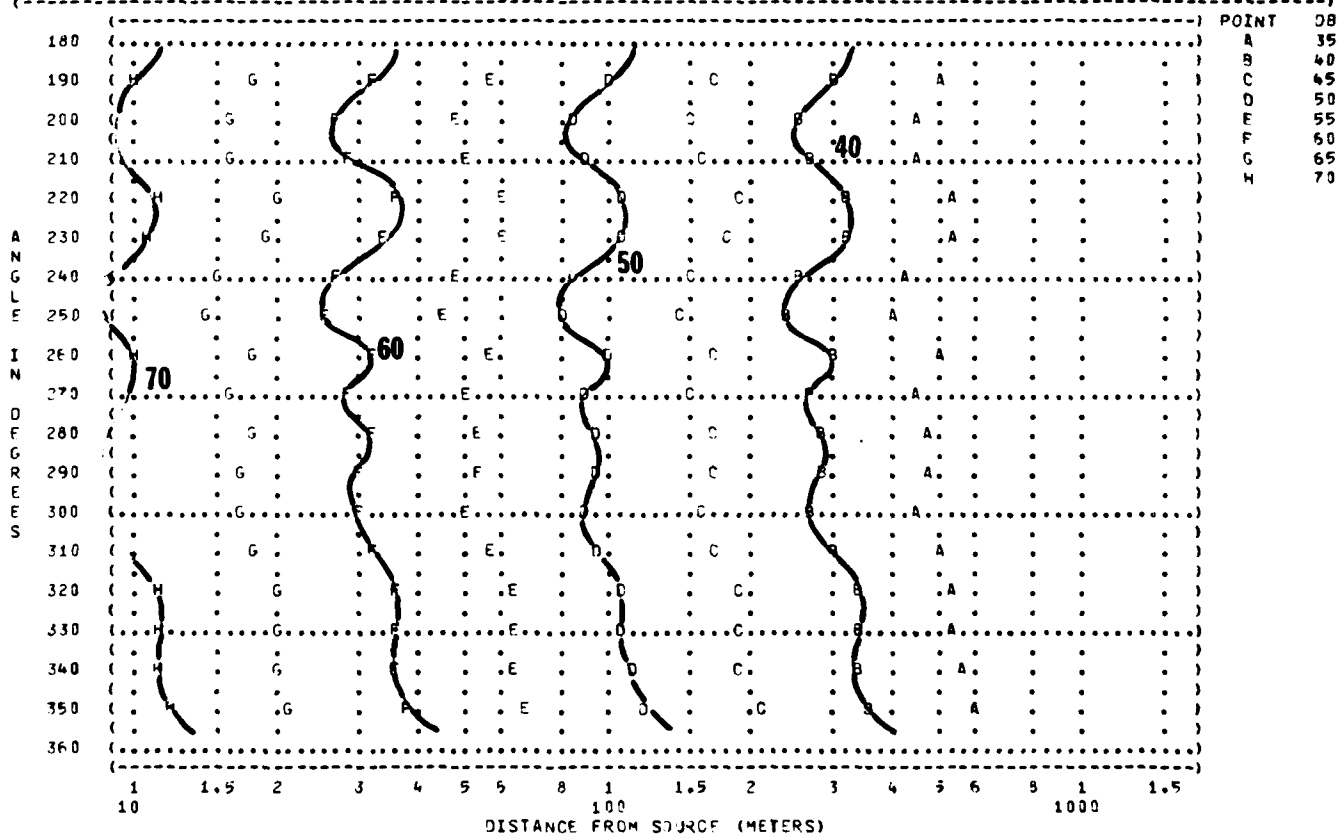


FIGURE 9 SOUND PRESSURE LEVEL (SPL) EQUAL LEVEL CONTOURS (FR) 1000 HZ OCTAVE BAND			IDENTIFICATION:
			OMEGA 1.4
			TEST BA-000-002
			RUN 01
NOISE SOURCE/SUBJECT:	OPERATION:	METEOROLOGY:	
MC-1 HEATER, DUCT TYPE,	3400 RPM	TEMP = 15 C	
PORTABLE		BAP PRESS = .700 M HG	25 JAN 82
FAR FIELD NOISE LEVELS		REL HUMID = 70 %	
			PAGE 21

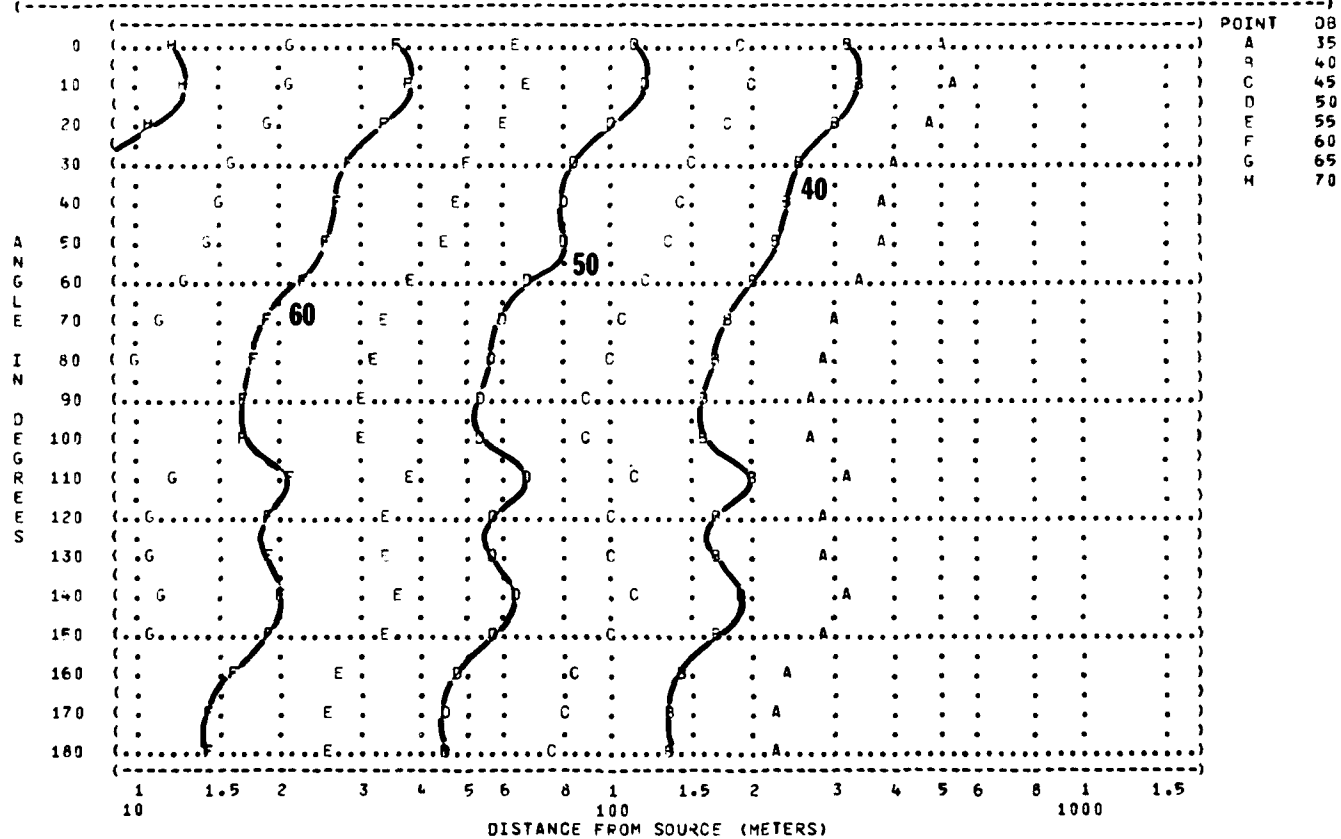

(FIGURE: SOUND PRESSURE LEVEL (SPL) (9 EQUAL LEVEL CONTOURS (dB) (1000 HZ OCTAVE BAND			) IDENTIFICATION:))) OMEGA 1.4)) TEST RA-000-002)) RUN 02)) 25 JAN 82)) PAGE 21)
(NOISE SOURCE/SUBJECT: (MC-1 HEATER, DUCT TYPE, (PORTABLE (FAR FIELD NOISE LEVELS	(OPERATION: (3400 RPM	) METEOROLOGY:) TEMP = 15 C) BAR PRESS = .760 M Hg) REL HUMID = 70 %	

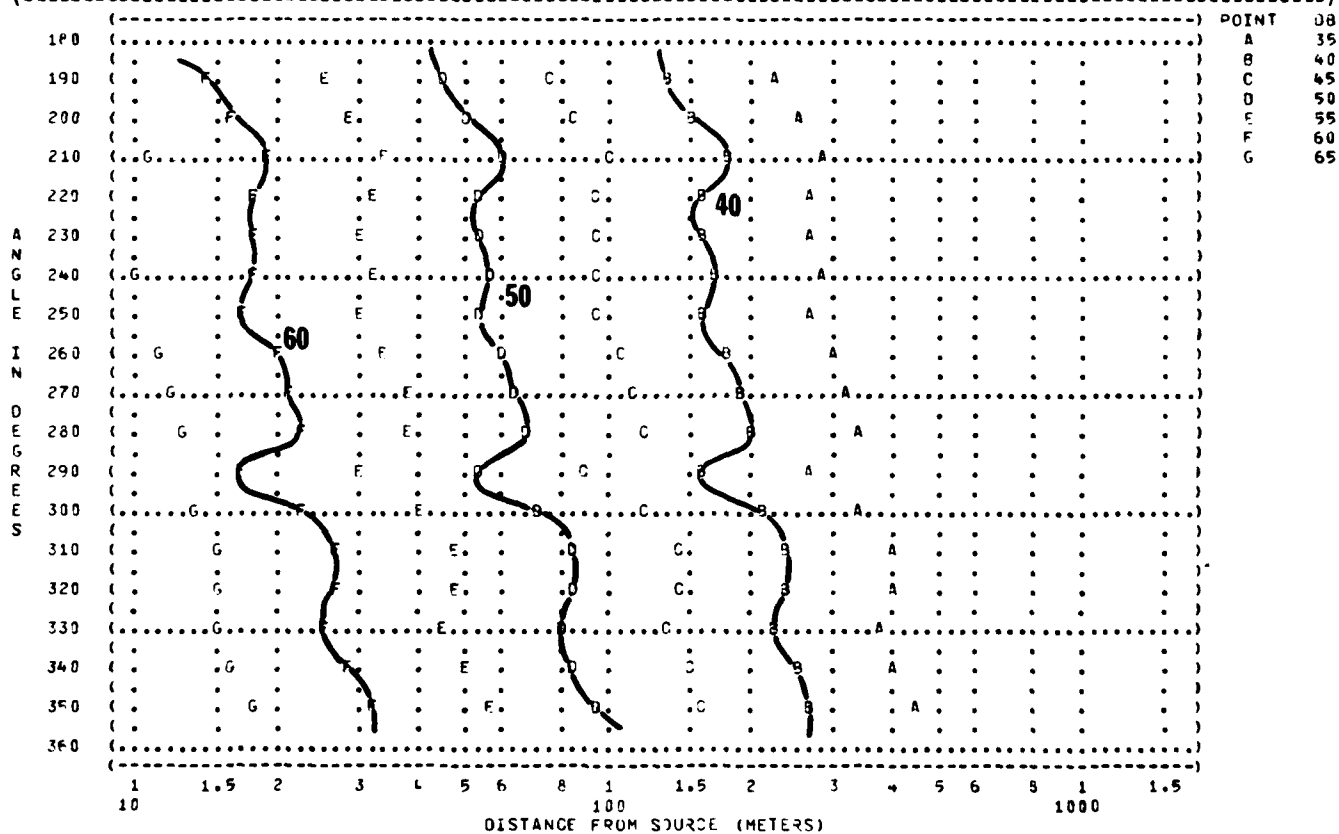

(FIGURE: 9) SOUND PRESSURE LEVEL (SPL)
 (EQUAL LEVEL CONTOURS (DB)
 (2000 HZ OCTAVE BAND) IDENTIFICATION:)
 () OMEGA 1.4)
 () TEST RA-000-002)
 (NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:) RUN 01)
 (MC-1 HEATER, JCT TYPE, (3400 RPM) TEMP = 15 C)
 (PORTABLE () BAR PRESS = .763 M HG) 25 JAN 52)
 (FAR FIELD NOISE LEVELS () REL HUMID = 70 %)
 () PAGE 22)



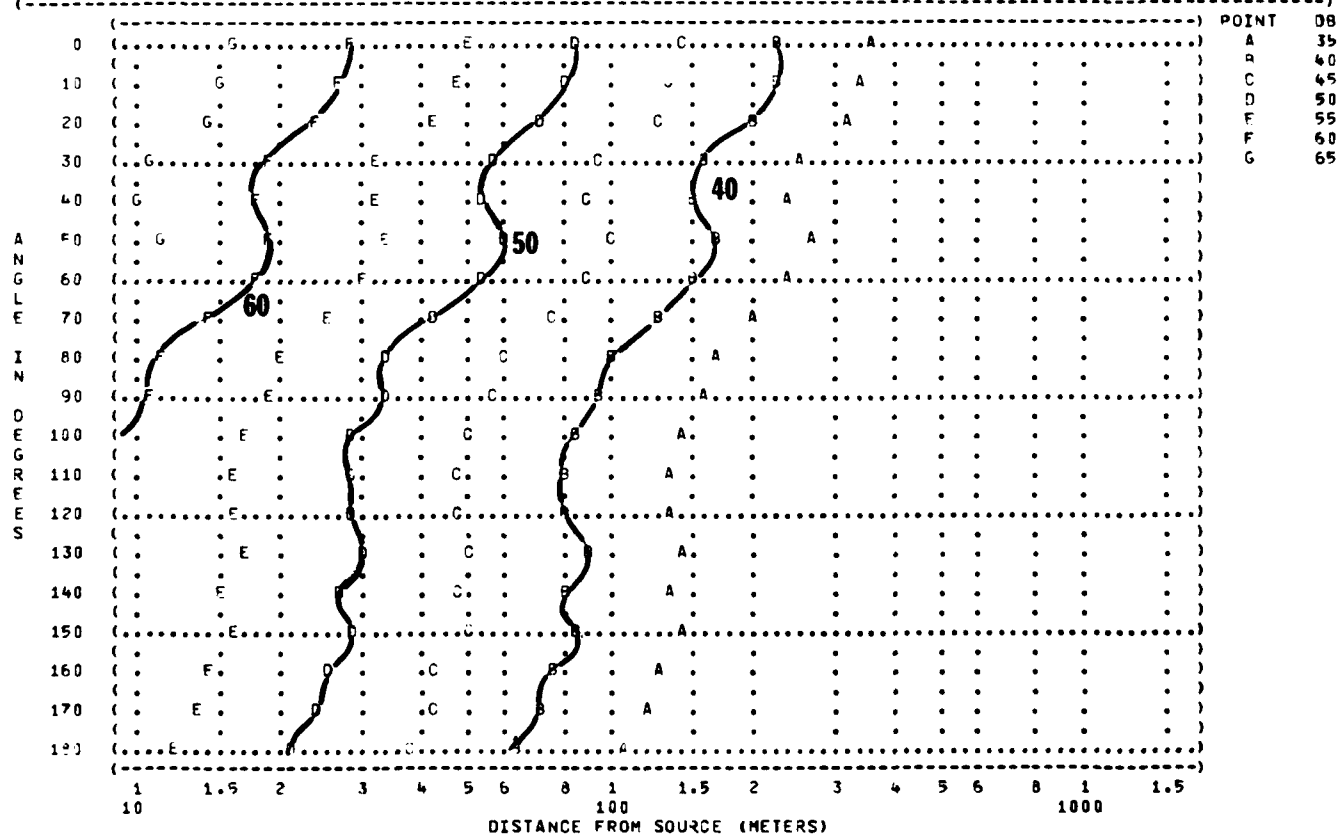


FIGURE 9 SOUND PRESSURE LEVEL (SPL) EQUAL LEVEL CONTOURS (LS) 4000 HZ OCTAVE BAND			IDENTIFICATION:
			OMEGA 1.4
			TEST RA-000-002
			RUN 01
			25 JAN 82
			PAGE 23
NOISE SOURCE/SUBJECT:	OPERATION:	METEOROLOGY:	
MC-1 HEATER, JUCT TYPE,	3400 RPM	TEMP = 15 C	
PORTABLE		BAR PRESS = .760 M HG	
FAR FIELD NOISE LEVELS		REL HUMID = 70 %	

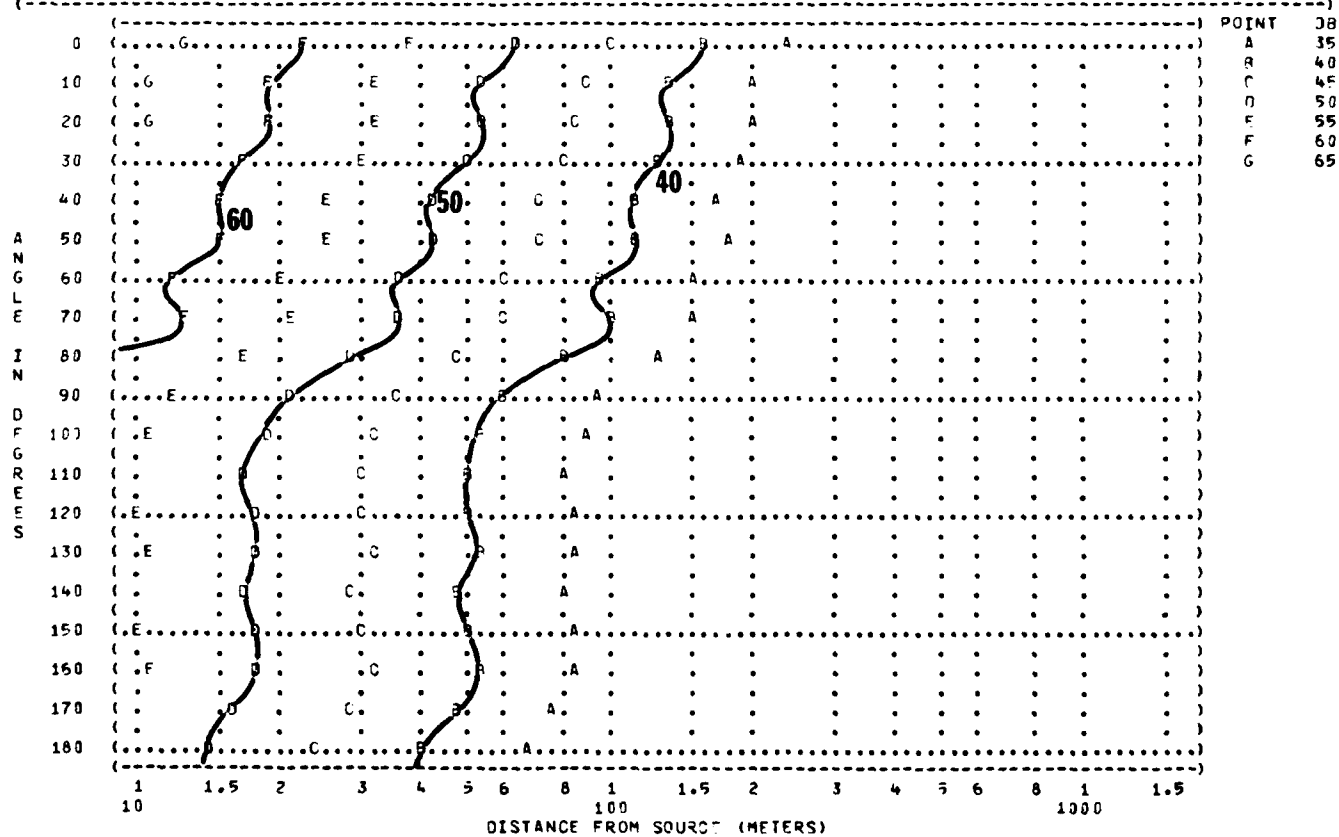


(FIGURE 9 SOUND PRESSURE LEVEL (SPL) EQUAL LEVEL CONTOURS (DB) 4000 HZ OCTAVE BAND)			(IDENTIFICATION:)
			()
			() OMEGA 1.4)
			() TEST RA-000-002)
(NOISE SOURCE/SUBJECT:)	(OPERATION:)	(METEOROLOGY:)	(RUN 02)
(MC-1 HEATER, DUCT TYPE,)	(3400 RPM)	(TEMP = 15 C)	()
(PORTABLE)		(BAR PRESS = .760 M HG)	(25 JAN 82)
(FAR FIELD NOISE LEVELS)		(REL HUMID = 70 %)	()
			() PAGE 23)

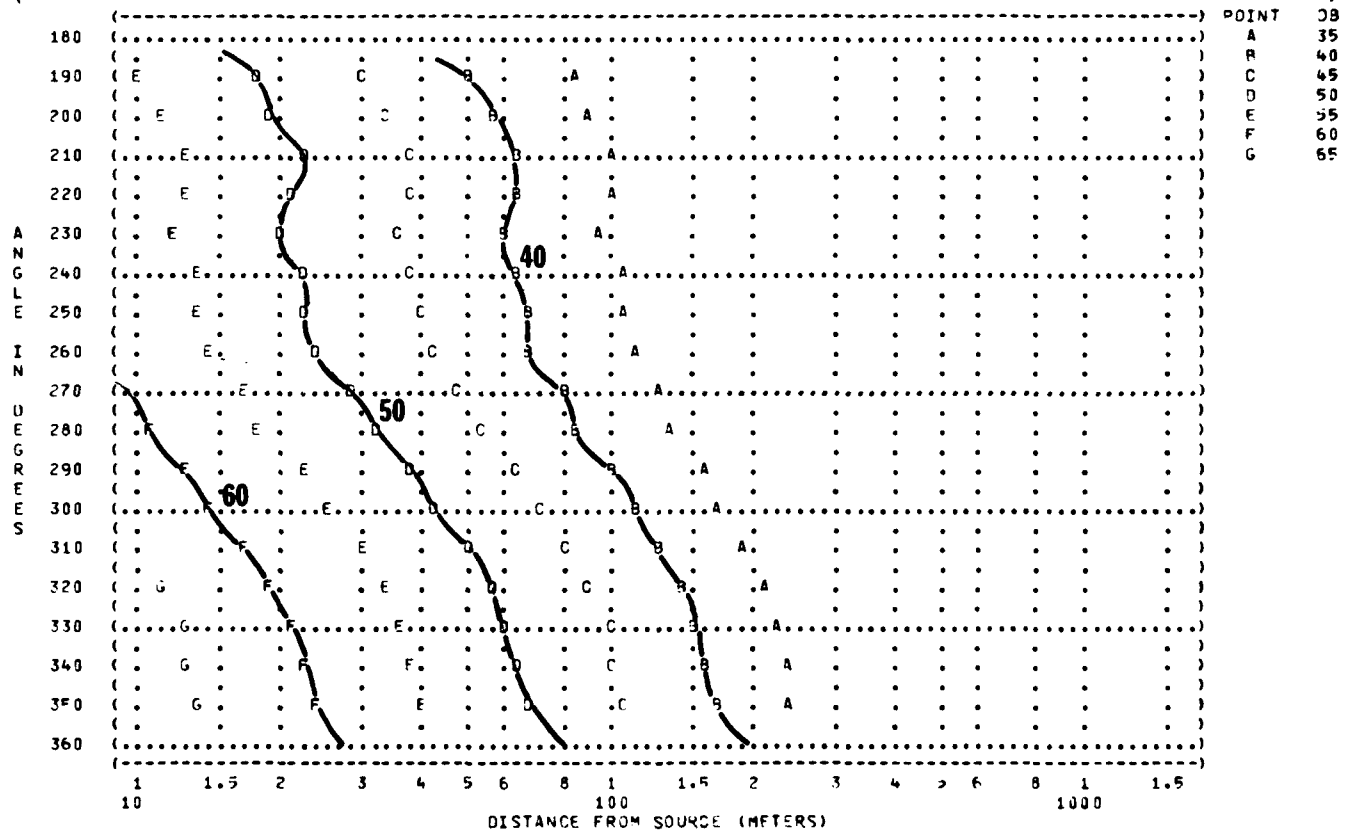


(FIGURE 9 SOUND PRESSURE LEVEL (SPL)) IDENTIFICATION:)
 (EQUAL LEVEL CONTOURS (dB)))
 (6300 HZ OCTAVE BAND))

(NOISE SOURCE/SUBJECT: (OPERATIONS:) METEOROLOGY:)
 (MC-1 HEATED DUCT TYPE, (3400 RPM) TEMP = 15 C)
 (PORTABLE () BAR PRESS = .760 MM HG)
 (FAR FIELD NOISE LEVELS () REL HUMID = 70 %)
 ())
 () PAGE 24)

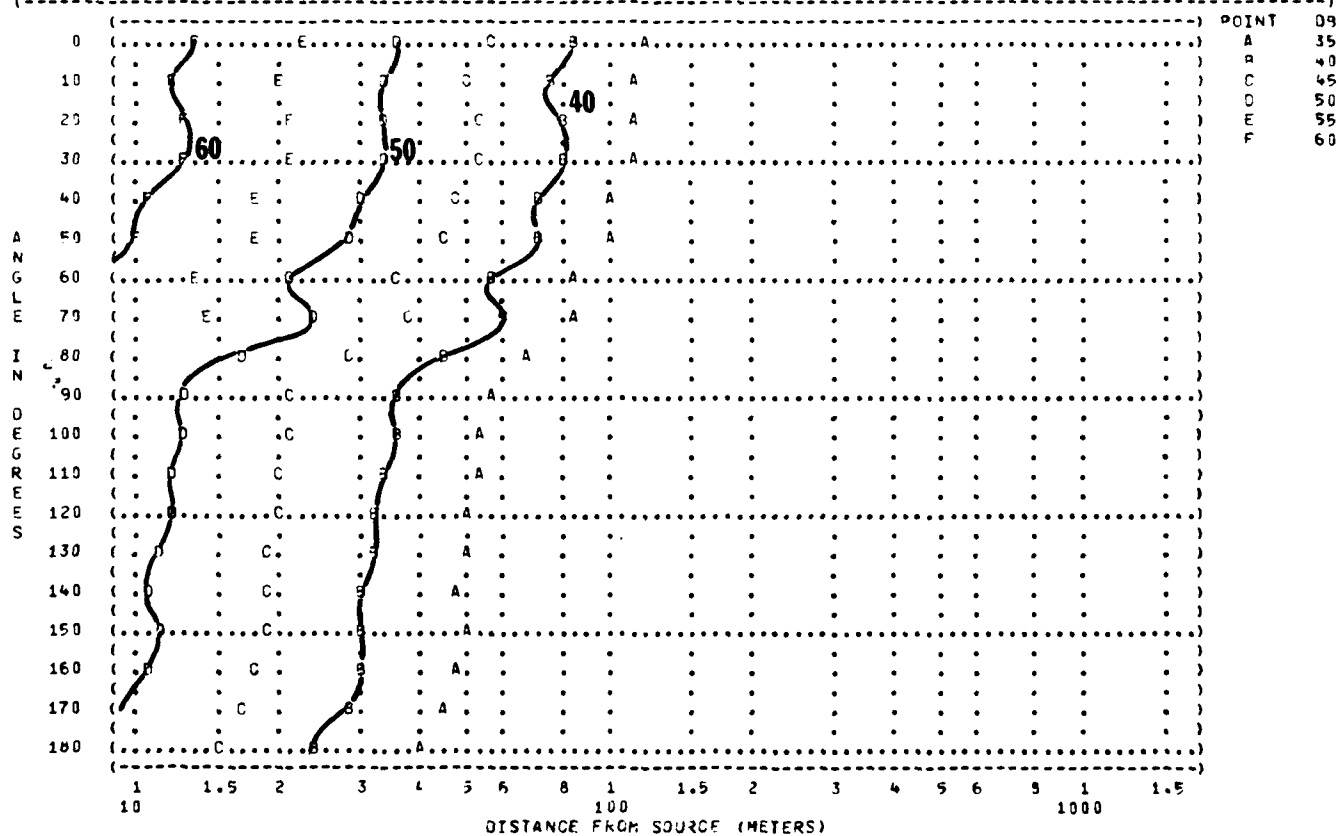

(FIGURE: SOUND PRESSURE LEVEL (SPL)			) IDENTIFICATION:)	
(9 EQUAL LEVEL CONTOURS (CR)			))	
(8000 HZ OCTAVE BAND			) OMEGA 1.4)	
) NOISE SOURCE/SUBJECT: (OPERATION:) METEOROLOGY:) TEST RA-000-002)			) RUN 02)	
(MC-1 HEATER, JUCT TYPE, (3400 RPM			) TEMP = 15 C)	
(PORTABLE (			) BAR PRESS = .760 M HG)	
(FAR FIELD NOISE LEVELS (			) REL HUMID = 70 %)	
()			) PAGE 24)	

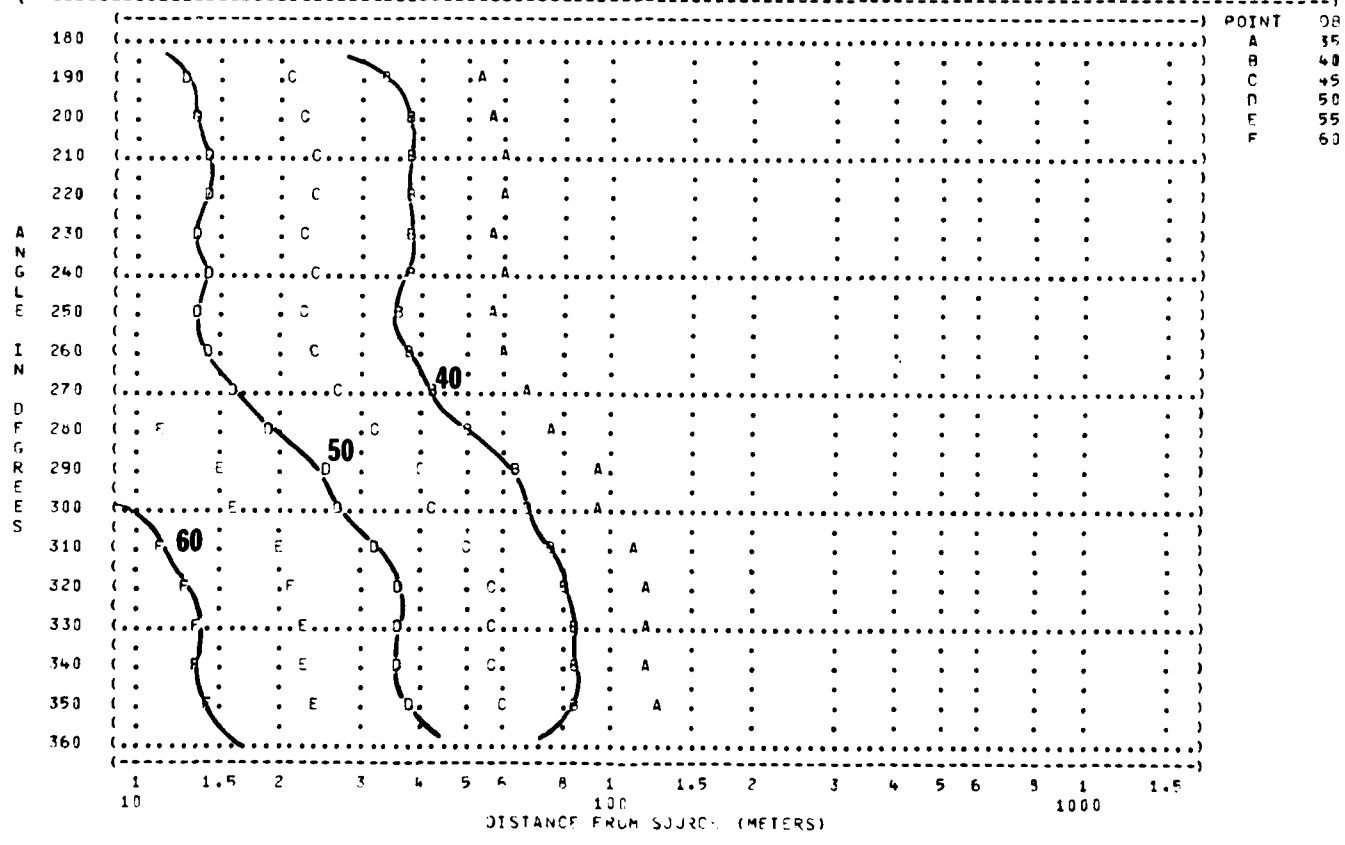

END

DATE
FILMED

7 - 82

DTIC