

AD-A120 602

A RATIONAL BASIS FOR THE SELECTION OF ICE STRENGTHENING

1/2

CRITERIA FOR SHIP. (U) ARCTEC INC COLUMBIA MD


J C COBURN ET AL. 11 JUL 80 SR-1267-VOL-2 SSC-310


UNCLASSIFIED

DOT-CG-904937-A

F/G 13/10

NL

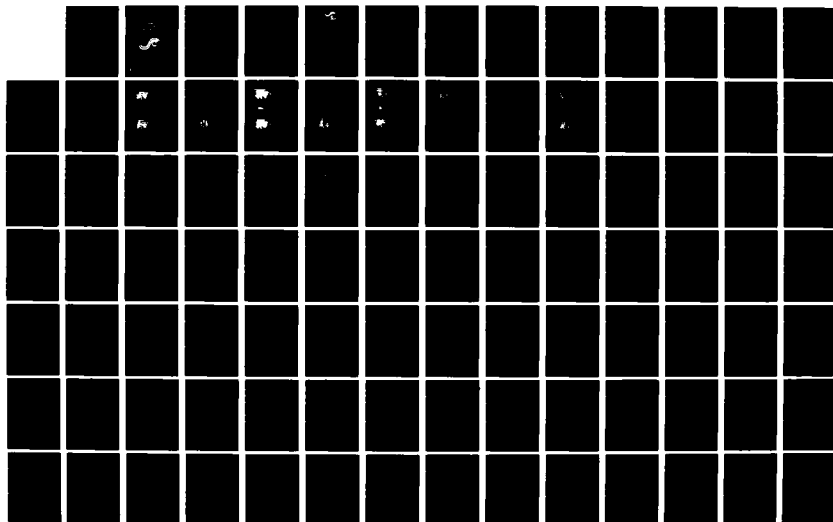




MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

SSC-310


①

AD A120602

**A RATIONAL BASIS FOR
THE SELECTION OF ICE
STRENGTHENING CRITERIA
FOR SHIPS
VOLUME II-APPENDICES**

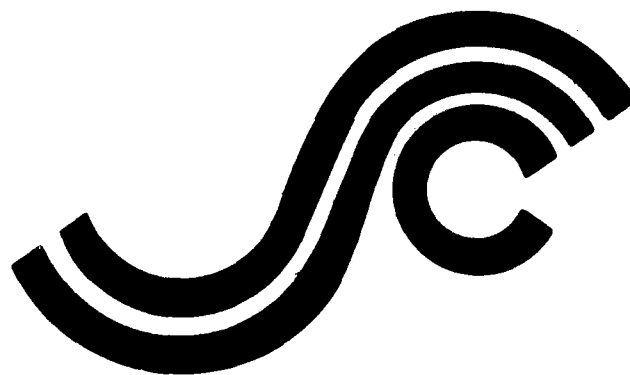

Copy available to DTIC does not
permit fully legible reproduction

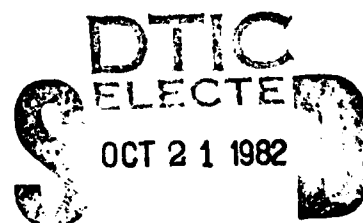

A

This document has been approved
for public release and sale; its
distribution is unlimited.

SHIP STRUCTURE COMMITTEE

1981

82 10 21 078

DTIC FILE COPY

SSC-310 A RATIONAL BASIS FOR THE SELECTION OF ICE STRENGTHENING CRITERIA FOR SHIPS VOLUME II-APPENDICES

SHIP STRUCTURE COMMITTEE

The SHIP STRUCTURE COMMITTEE is constituted to prosecute a research program to improve the hull structures of ships and other marine structures by an extension of knowledge pertaining to design, materials and methods of construction.

RAAdm Clyde T. Lusk, Jr. (Chairman)
Chief, Office of Merchant Marine
Safety
U. S. Coast Guard Headquarters

Mr. P. M. Palermo
Executive Director
Ship Design & Integration
Directorate
Naval Sea Systems Command

Mr. W. M. Hannan
Vice President
American Bureau of Shipping

Mr. J. Gross
Deputy Assistant Administrator for
Commercial Development
Maritime Administration

Mr. J. B. Gregory
Chief, Research & Development Staff
of Planning & Assessment
U.S. Geological Survey

Mr. Thomas W. Allen
Chief Engineering Officer
Military Sealift Command

LCdr D. B. Anderson, U.S. Coast Guard (Secretary)

SHIP STRUCTURE SUBCOMMITTEE

The SHIP STRUCTURE SUBCOMMITTEE acts for the Ship Structure Committee on technical matters by providing technical coordination for the determination of goals and objectives of the program, and by evaluating and interpreting the results in terms of structural design, construction and operation.

U. S. COAST GUARD

Capt. R. L. Brown
Cdr. J. C. Card
Mr. R. E. Williams
Cdr. J. A. Sanial

NAVAL SEA SYSTEMS COMMAND

Mr. R. Chiu
Mr. J. B. O'Brien
Mr. W. C. Sandberg
LCdr D. W. Whiddon
Mr. T. Nomura (Contracts Admin.)

MARITIME ADMINISTRATION

Mr. M. O. Hammer
Dr. W. M. Maclean
Mr. F. Seibold
Mr. M. Touma

NATIONAL ACADEMY OF SCIENCES SHIP RESEARCH COMMITTEE

Mr. A. Dudley Haff - Liaison
Mr. R. W. Rumke - Liaison

SOCIETY OF NAVAL ARCHITECTS & MARINE ENGINEERS

Mr. A. B. Stavovy - Liaison

WELDING RESEARCH COUNCIL

Mr. K. H. Koopman - Liaison

MILITARY SEALIFT COMMAND

Mr. Albert Attermeyer
Mr. T. W. Chapman
Mr. A. B. Stavovy
Mr. D. Stein

AMERICAN BUREAU OF SHIPPING

Dr. D. Liu
Mr. I. L. Stern

U. S. GEOLOGICAL SURVEY

Mr. R. Giamgerelli
Mr. Charles Smith

INTERNATIONAL SHIP STRUCTURES CONGRESS

Mr. S. G. Stiansen - Liaison

AMERICAN IRON & STEEL INSTITUTE

Mr. R. H. Sterne - Liaison

STATE UNIV. OF NEW YORK MARITIME COLLEGE

Dr. W. R. Porter - Liaison

U. S. COAST GUARD ACADEMY

LCdr R. G. Vorthman - Liaison

U. S. NAVAL ACADEMY

Dr. R. Battacharyya - Liaison

U. S. MERCHANT MARINE ACADEMY

Dr. Chin-Bea Kin - Liaison

DISCLAIMER NOTICE

**THIS DOCUMENT IS BEST QUALITY
PRACTICABLE. THE COPY FURNISHED
TO DTIC CONTAINED A SIGNIFICANT
NUMBER OF PAGES WHICH DO NOT
REPRODUCE LEGIBLY.**

Member Agencies:

*United States Coast Guard
Naval Sea Systems Command
Military Sealift Command
Maritime Administration
United States Geological Survey
American Bureau of Shipping*



**An Interagency Advisory Committee
Dedicated to Improving the Structure of Ships**

Address Correspondence to:

**Secretary, Ship Structure Committee
U.S. Coast Guard Headquarters, (G-M/TP 13
Washington, D.C. 20593**

SR-1267

1981

As marine activity in ice covered waters is expected to increase in the foreseeable future, the design of ships to meet the varying conditions will have an expanding role for the naval architect.

The Ship Structure Committee has undertaken a program to acquire the necessary knowledge to permit a rational design for vessels which will be operating in various ice conditions. This first effort in the program surveyed the various classification societies and government regulations in order to discern the similarities and differences of their requirements, and further to recommend a procedure for selecting appropriate ice strengthening criteria. The results of this project are being published in two volumes. Volume I (SSC-309) contains the analytical portion of the work and Volume II (SSC-310) contains the appendices.

A handwritten signature in black ink, appearing to read "Clyde T. Lusky, Jr.", is positioned above the printed name.

**Clyde T. Lusky, Jr.
Rear Admiral, U.S. Coast Guard
Chairman, Ship Structure Committee**

1. Report No. SSC-310	2. Government Accession No. AD-A120 602	3. Recipient's Catalog No.	
4. Title and Subtitle A RATIONAL BASIS FOR THE SELECTION OF ICE STRENGTHENING CRITERIA FOR SHIPS VOLUME II - APPENDICES		5. Report Date 11 July 1980	
		6. Performing Organization Code	
7. Author(s) J. L. Coburn, F. W. DeBord, J. B. Montgomery, A. M. Nawwar, K. E. Dane		8. Performing Organization Report No. SR-1267	
		10. Work Unit No. (TRIS)	
9. Performing Organization Name and Address ARCTEC, Incorporated 9104 Red Branch Road Columbia, Maryland 21045		11. Contract or Grant No. DOT-CG-904937-A	
		13. Type of Report and Period Covered Final Report 20 August 1979 - 26 May 1980	
12. Sponsoring Agency Name and Address U.S. Coast Guard Office of Merchant Marine Safety Washington, D.C. 20593		14. Sponsoring Agency Code G-M	
		15. Supplementary Notes SHIP STRUCTURE COMMITTEE PROJECT SR 1267	
16. Abstract → This report, volume II, contains the appendices, A, B, and C, to Volume I of the same title. Volume I describes sources and differences between the ice strengthening criteria in use by various classification societies, and government regulations such as Canadian Arctic Pollution Prevention Regulations, and Swedish-Finnish Winter Navigation Board Regulations. A comparison of the different criteria is presented on the basis of a relative weight and relative cost. Effectiveness of the criteria is evaluated on the basis of statistical ice damage data and on a sample of individual ice damage cases. In addition, a comparison of different materials and fabrication techniques used for ice strengthening is presented. Deficiencies in current ice strengthening procedures are identified and a rational procedure for selecting appropriate ice strengthening criteria is presented. ←			
17. Key Words Classification Society Rules Ice-Worthy Ships Ice Loads Ice Strengthening Ice Damage Hull Strength Icebreaker Ice Classification		18. Distribution Statement Documentation is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22161	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 176	22. Price

METRIC CONVERSION FACTORS


Approximate Conversions to Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
in	inches	2.5	centimeters	cm
ft	feet	30	centimeters	cm
yd	yards	0.9	meters	m
mi	miles	1.6	kilometers	km
AREA				
in ²	square inches	6.5	square centimeters	cm ²
ft ²	square feet	0.09	square meters	m ²
yd ²	square yards	0.8	square meters	m ²
ac ²	square miles	2.6	square kilometers	km ²
	acres	0.4	hectares	ha
MASS (weight)				
oz	ounces	28	grams	g
lb	pounds	0.45	kilograms	kg
	short tons (2000 lb)	0.9	tonnes	t
VOLUME				
teaspoon	teaspoons	5	milliliters	ml
tablespoon	tablespoons	15	milliliters	ml
fl oz	fluid ounces	30	milliliters	ml
c	cups	0.24	liters	l
pt	pints	0.47	liters	l
qt	quarts	0.95	liters	l
gal	gallons	3.8	liters	l
cu ft	cubic feet	0.03	cubic meters	m ³
yd ³	cubic yards	0.76	cubic meters	m ³
TEMPERATURE (exact)				
°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

* 1 in = 2.54 exactly. For other exact conversions and more detailed tables, see NBS Mon. Publ. 256, Units of the Grain and Measure, Price 12.50, SD Catalog No. C15.16286.

Approximate Conversions from Metric Measures

When You Know	Multiply by	To Find	Symbol
LENGTH			
millimeters	0.04	inches	in
centimeters	0.4	inches	in
meters	3.3	feet	ft
meters	1.1	yards	yd
kilometers	0.6	miles	mi
AREA			
square centimeters	0.16	square inches	in ²
square meters	1.2	square yards	yd ²
square kilometers	0.4	square miles	mi ²
hectares (10,000 m ²)	2.5	acres	ac
MASS (weight)			
grams	0.035	ounces	oz
kilograms	2.2	pounds	lb
tonnes (1000 kg)	1.1	short tons	ton
VOLUME			
milliliters	0.03	fluid ounces	fl oz
liters	2.1	pints	pt
liters	1.06	quarts	qt
liters	0.26	gallons	gal
cubic meters	36	cubic feet	ft ³
cubic meters	1.3	cubic yards	yd ³
TEMPERATURE (exact)			
Celsius temperature	9/5 (then add 32)	Fahrenheit temperature	°F



CONTENTS

VOLUME II	Page
APPENDIX A - MAXIMUM AND AVERAGE ICE CONDITIONS BY MONTH	1
Maximum Ice Conditions	2
Average Ice Conditions	8
APPENDIX A.2 - CANADA - Maximum and Average Ice Conditions by Month	14
Maximum Ice Conditions	15
Average Ice Conditions	27
APPENDIX A.3 - ANTARCTIC - Maximum and Average Ice Condi- tions by Month	39
Maximum Ice Conditions	40
Average Ice Conditions	43
APPENDIX A.4 - GREAT LAKES - Maximum and Average Ice Conditions by Month	46
December Through April	47
APPENDIX A.5 - GULF OF ST. LAWRENCE - Maximum and Average Ice Conditions by Month	52
Maximum Ice Conditions	53
Average Ice Conditions	60
APPENDIX A.6 - BALTIC SEA - Maximum and Average Ice Condi- tions by Month	66
Maximum Ice Conditions	67
Average Ice Conditions	69
APPENDIX A.7 - WORLD METEOROLOGICAL ORGANIZATION SEA ICE NOMENCLATURE	72
APPENDIX B - CALCULATED ICE STRENGTHENED SCANTLINGS FOR THREE REPRESENTATIVE SHIPS	83
APPENDIX B-2 - CALCULATED LOAD-CARRYING CAPABILITIES OF RESULTING SCANTLINGS FOR THREE REPRESENTA- TIVE SHIPS	108
APPENDIX B-3 - TABULAR LISTING OF LOW-TEMPERATURE STEELS AND THEIR PROPERTIES	116
APPENDIX B-4 - TABULAR WEIGHT AND COST DATA	149
APPENDIX C - REVIEW OF METHODS FOR DAMAGE ANALYSIS	152

CONTENTS

VOLUME I	Page
1. INTRODUCTION	1-1
1.1 Objective	1-1
1.2 Background	1-1
1.3 Approach	1-4
2. PROBLEM DEFINITION	2-1
2.1 Introduction	2-1
2.2 Definition of Load	2-2
2.3 Definition of Structural Response	2-12
2.4 Reliability	2-16
3. ENVIRONMENT	3-1
3.1 Introduction	3-1
3.2 Governing Ice Conditions	3-1
3.3 Sources of Data and Analysis Procedures	3-4
4. MATERIALS	4-1
4.1 Material Requirements for Ice Strengthened Ships	4-1
4.2 Currently Available Steels	4-9
4.3 Existing Criteria for Material Selection	4-12
4.4 Requirements for Additional Information	4-13
5. EXISTING ICE STRENGTHENING CRITERIA	5-1
5.1 General Description of Existing Criteria	5-1
5.2 Methods for Selecting the Level of Ice Strengthening	5-1
5.3 Load Criteria, Rationale, and Structural Design Methods	5-7
5.4 Resulting Scantlings for Three Representative Ships	5-25
5.5 Analysis of the Load-Carrying Capability of Resulting Scantlings	5-34
5.6 Analysis of Equivalence Between Certain Criteria	5-40
5.7 Comparison of Relative Steel Weights and Fabrication Costs	5-43
6. EXPERIENCE OF ICE-CLASSED SHIPS	6-1
6.1 Specific Ice Damage	6-1
6.2 General and Fleet Experience with Ice-Classed Ships	6-1
7. CRITIQUE OF CURRENT CRITERIA	7-1
7.1 General Deficiencies	7-1
7.2 Assumed Distribution of Load for Frame Design	7-2
7.3 Factors and Method Used to Determine Design Load	7-6
7.4 Structural Analysis Methods and Response Criteria	7-6

CONTENTS (Continued)

	Page
8. PROPOSED RATIONAL BASIS FOR SELECTING ICE STRENGTHENING CRITERIA	8-1
8.1 Materials	8-1
8.2 Reliability	8-1
8.3 Loads	8-4
8.4 Response Criteria	8-5
8.5 Summary of Proposed Approach	8-8
9. RECOMMENDATIONS-NEEDED RESEARCH AND DEVELOPMENT	9-1
9.1 R&D Program Summary	9-1
9.2 Full-Scale Tests	9-1
9.3 Refine the Rational Approach	9-3
9.4 Incorporate Response Criteria into the Approach Proposed in Section 8	9-3
9.5 Ice Interaction	9-4
9.6 Generalize the Analytic Model of Ship-Ice Interaction	9-5
10. BIBLIOGRAPHY	10-1



Accession For	
DTIC GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution	
Availability Codes	
Avail and/or	
Special	
A23 CP	


APPENDIX A

MAXIMUM AND AVERAGE ICE CONDITIONS BY MONTH

- A.1 Alaska
- A.2 Canada
- A.3 Antarctic
- A.4 Great Lakes
- A.5 Gulf of St. Lawrence
- A.6 Baltic Sea
- A.7 WMO Sea-Ice Nomenclature


Abbreviations used in this Appendix are as follows:

- FY = first-year ice
- MY = multi-year ice
- IB = iceberg, bergy bits, growlers, and any other fragments
- IS = ice island or fragment therefrom
- BI = broken ice
- XX = level ice thickness. The corresponding pressure ridge depth (water surface to keel depth) contained within level ice floes is ten times the level ice thickness. The depth of consolidation within the first-year pressure ridge is assumed 25% of the depth; for multi-year ice 50% of the depth is assumed to be consolidated.

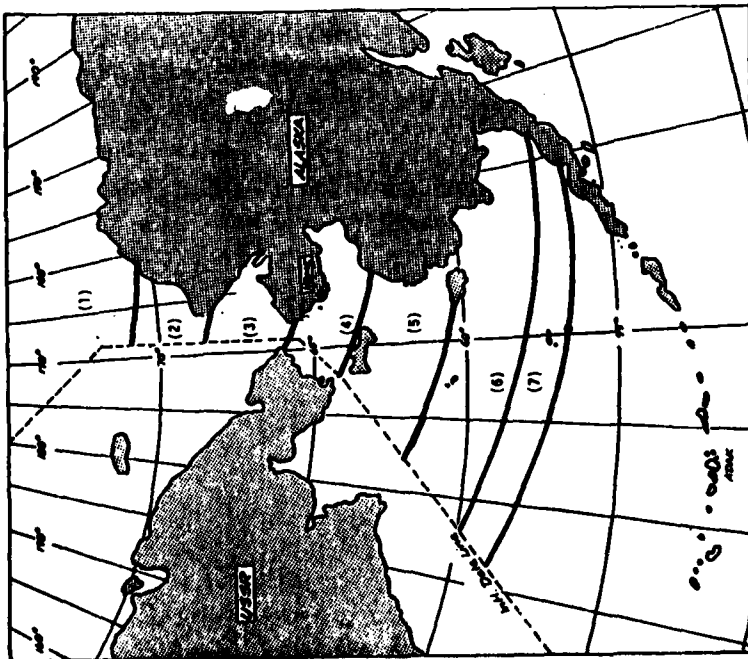


MAXIMUM ICE CONDITIONS, JANUARY

ICE AREA	ICE CHARACTERISTICS
1	FY 4; NY 8.5; IS
2	FY 4; NY 8.5
3	FY 3; NY 8.5
4	FY 3
5	FY 2
6	FY 1
7	BI 1

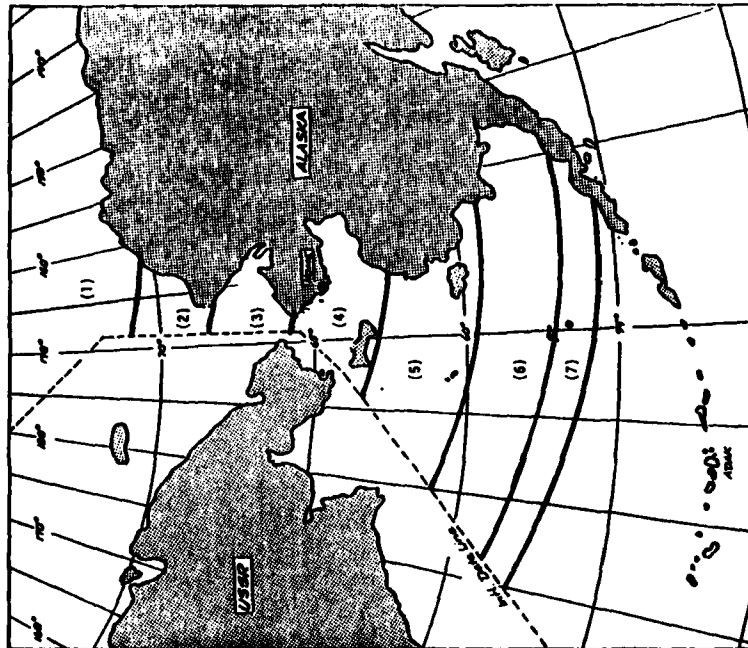


MAXIMUM ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	FY 5; NY 9; IS
2	FY 4.5; NY 9
3	FY 4; NY 9
4	FY 3
5	FY 2
6	FY 1
7	BI 1

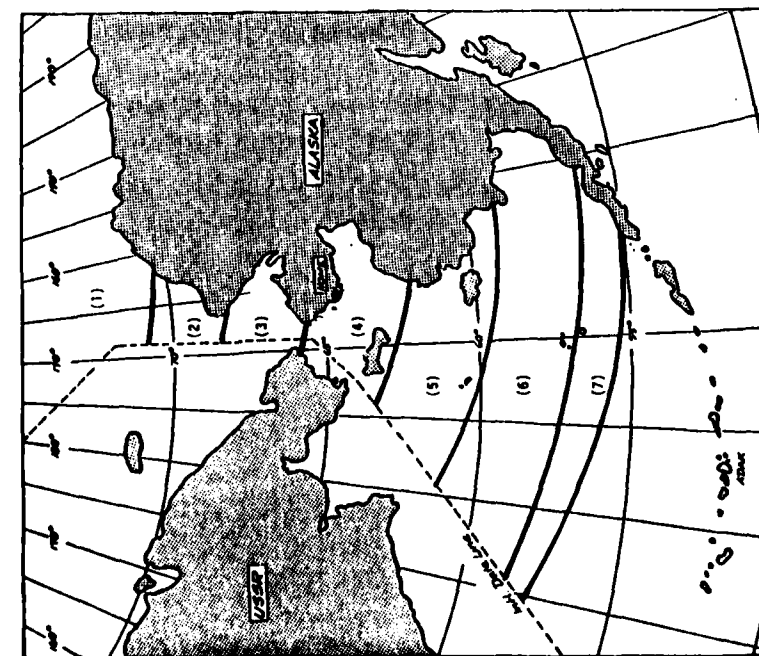


MAXIMUM ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	FY 5.5; MY 10; IS
2	FY 5; MY 10
3	FY 4.5; MY 10
4	FY 4
5	FY 3
6	FY 2
7	BI 2

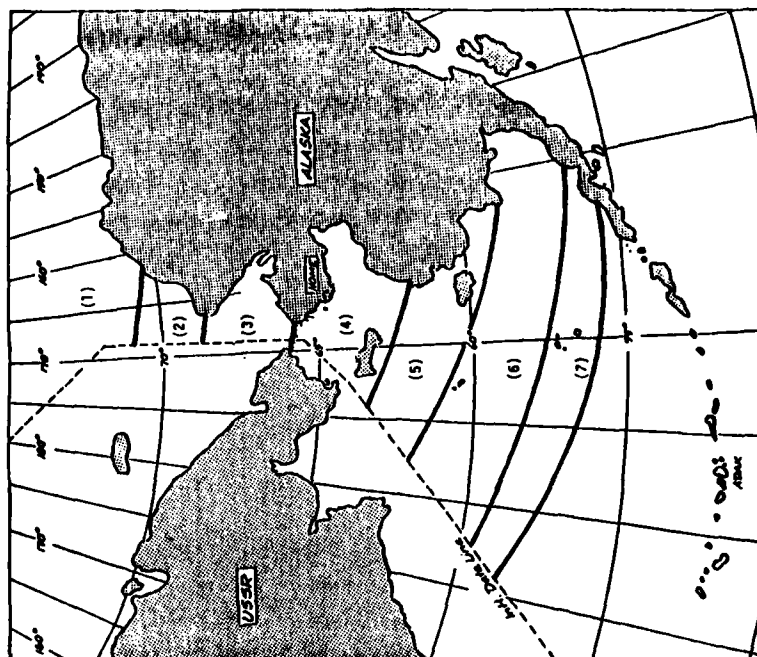


MAXIMUM ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	FY 6.5; MY 11; IS
2	FY 6; MY 10
3	FY 5; MY 10
4	FY 4
5	FY 3
6	FY 2
7	BI 2

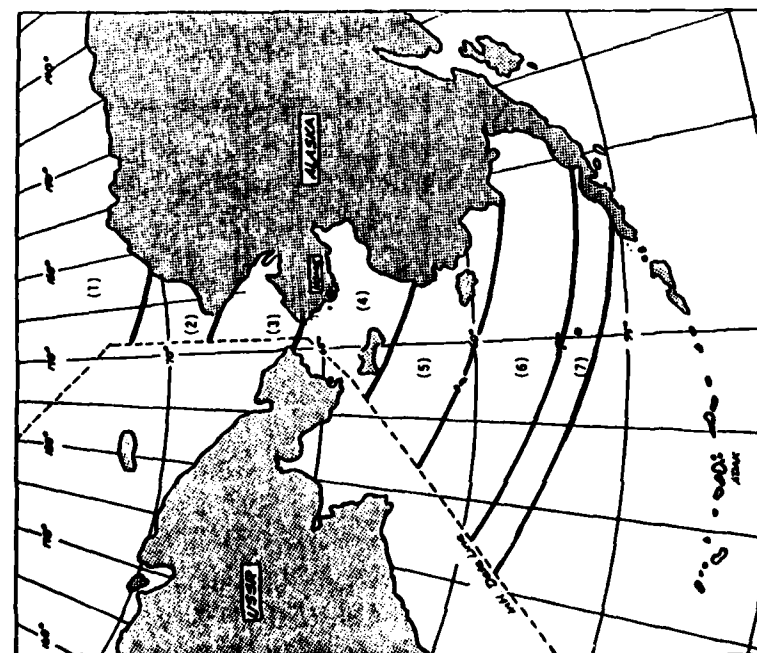


MAXIMUM ICE CONDITIONS, MAY

ICE AREA	ICE CHARACTERISTICS
1	PY 7; MY 11.5; IS
2	PY 6; MY 10
3	PY 5; MY 10
4	PY 4
5	PY 3
6	PY 2
7	BI 2

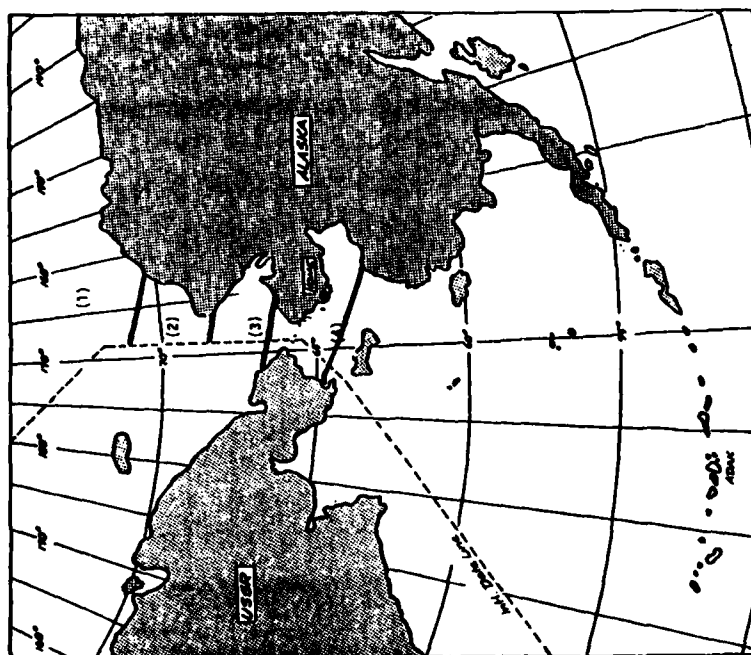


MAXIMUM ICE CONDITIONS, JUNE

ICE AREA	ICE CHARACTERISTICS
1	PY 7; MY 11.5; IS
2	PY 6; MY 10
3	PY 4; MY 6
4	PY 3; BI 2

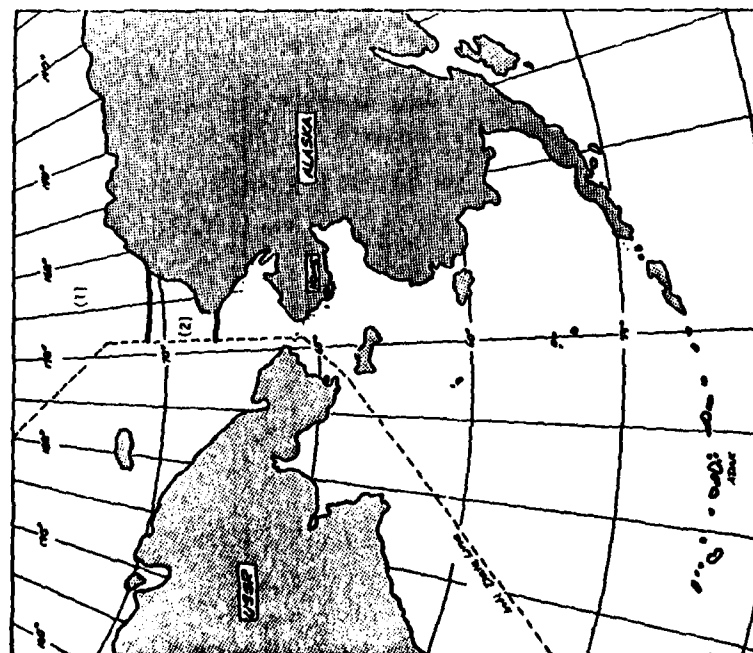


MAXIMUM ICE CONDITIONS, JULY

ICE AREA	ICE CHARACTERISTICS
1	PI 5.5; NY 10; IS
2	NY 8; BT 4

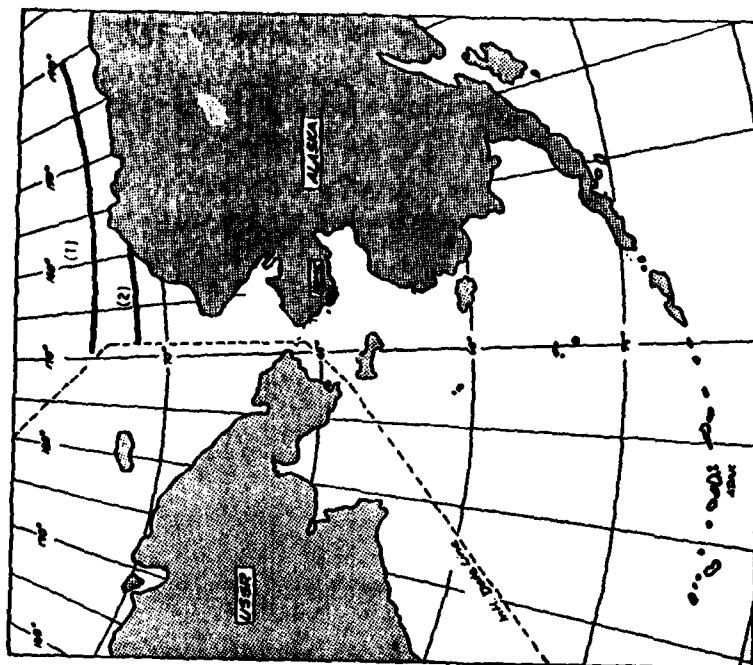


MAXIMUM ICE CONDITIONS, AUGUST

ICE AREA	ICE CHARACTERISTICS
1	PI 4.5; NY 8; IS
2	BT 4

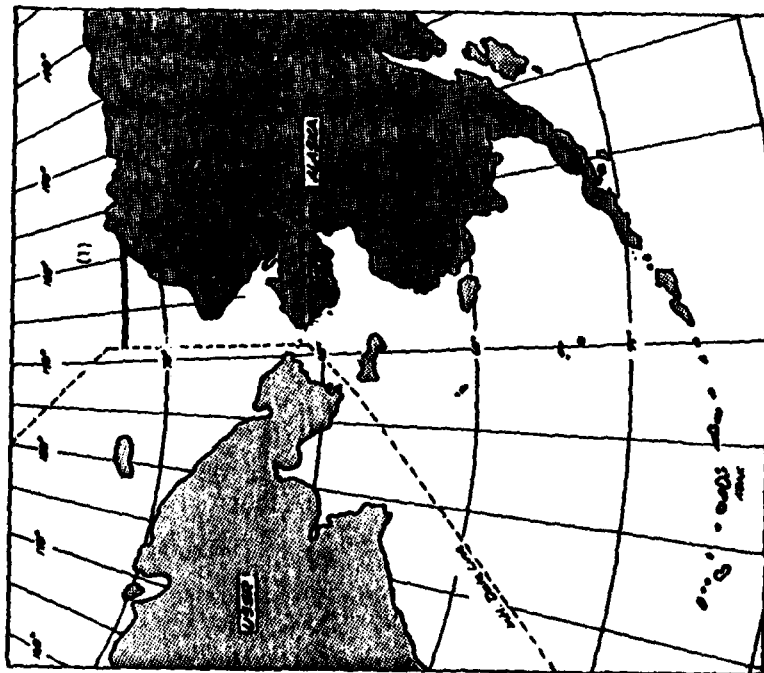


WALDORF ICE CONDITIONS, SEPTEMBER

ICE AREA	ICE CHARACTERISTICS
1	NY 6; 81 6; 15

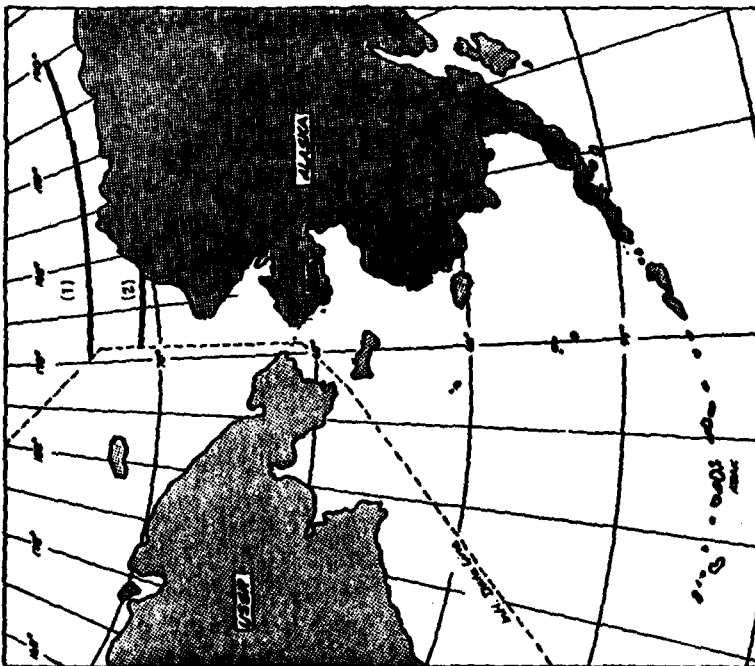


WALDORF ICE CONDITIONS, OCTOBER

ICE AREA	ICE CHARACTERISTICS
1	PY 1; NY 6; 15
2	81 1
3	PY 0.5

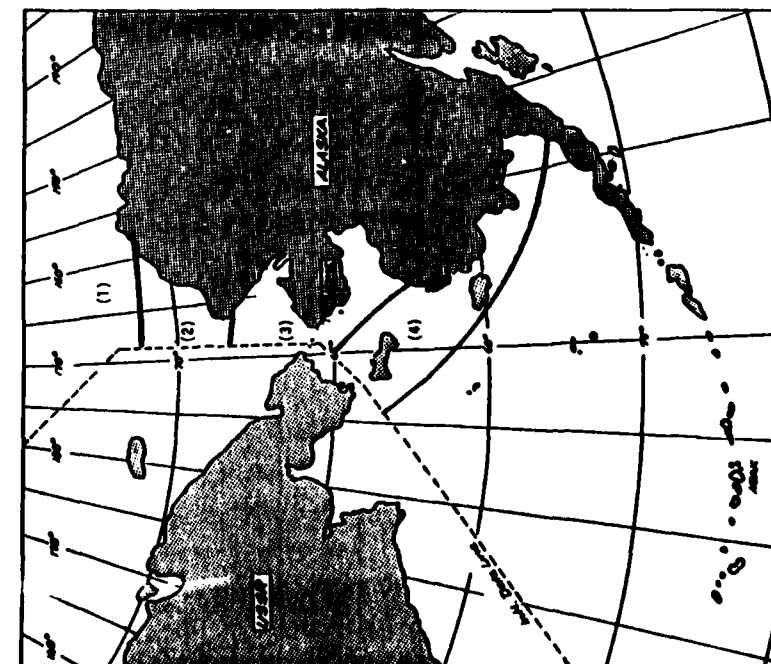


WALIDIN ICE CONDITIONS, NOVEMBER

ICE AREA	ICE CHARACTERISTICS
1	PY 2; MY 7; IS
2	PY 2; MY 7
3	PY 1
4	BI 1

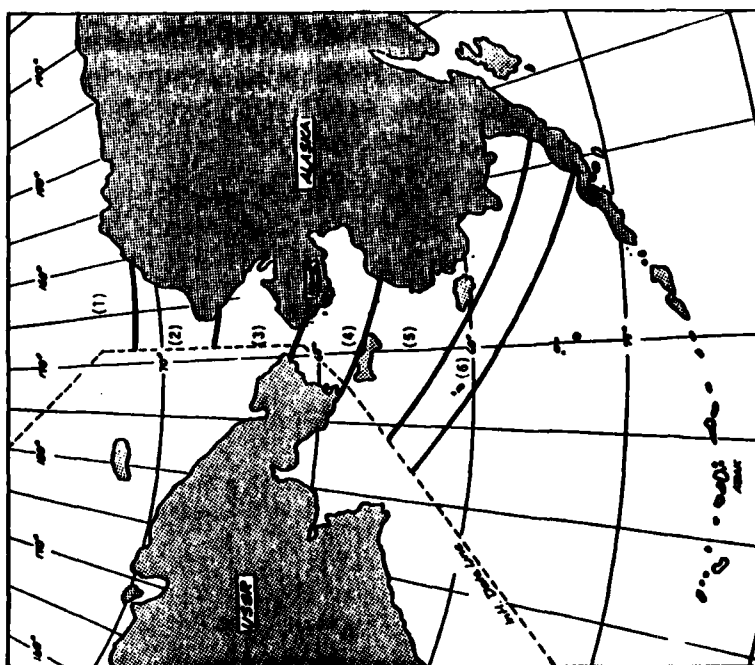


WALIDIN ICE CONDITIONS, DECEMBER

ICE AREA	ICE CHARACTERISTICS
1	PY 3; MY 8; IS
2	PY 3; MY 8
3	PY 2.5
4	PY 2
5	PY 1
6	BI 1

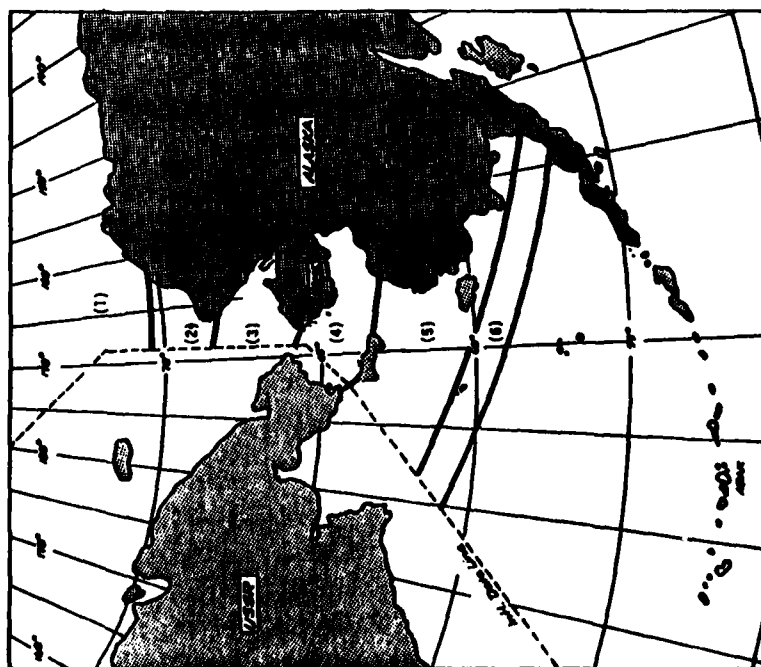


AVERAGE ICE CONDITIONS, JANUARY

ICE AREA	ICE CHARACTERISTICS
1	PT 3.5; NW 8.5; IS
2	PT 3.0; NW 8.5
3	PT 2.5
4	PT 1.75
5	PT 1.25
6	BT 1

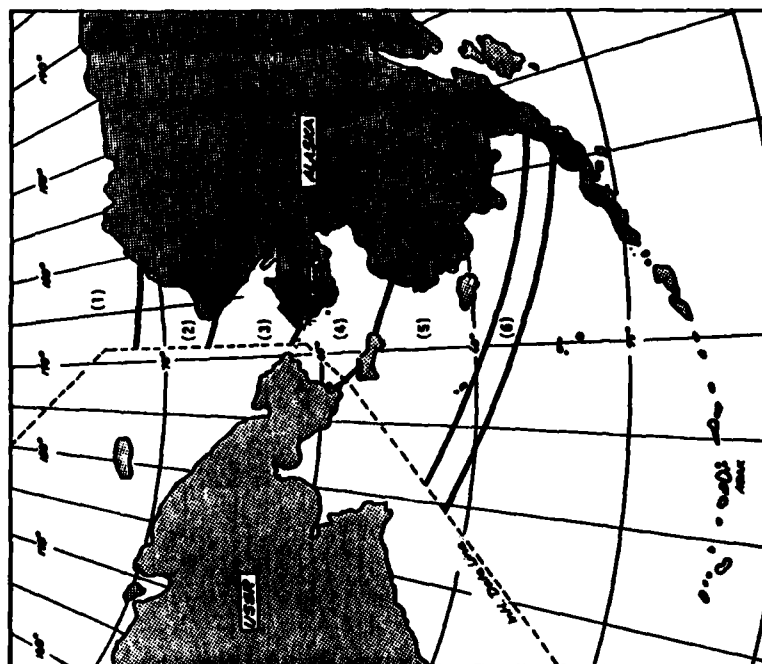


AVERAGE ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	PT 4; NW 9; IS
2	PT 3.5; NW 9
3	PT 3.25
4	PT 2.75
5	PT 2.25
6	BT 1

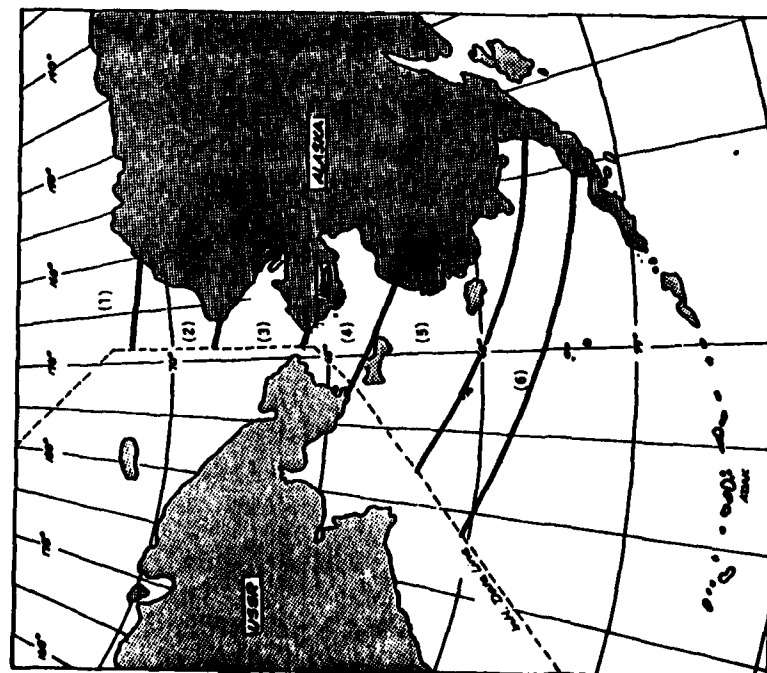


AVERAGE ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	PI 4.5; HW 10; IS
2	PI 4.5; HW 10
3	PI 4
4	PI 3.25
5	PI 2.5
6	BI 1.5

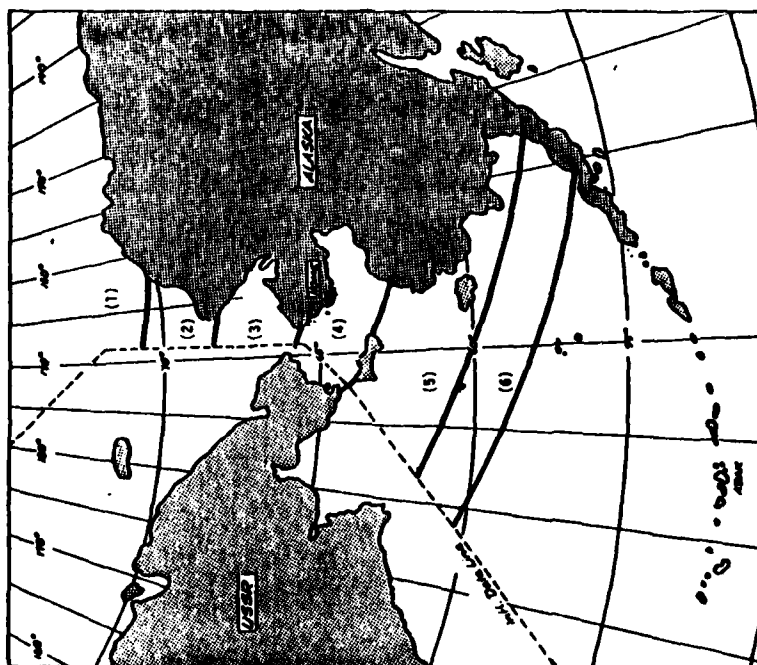


AVERAGE ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	PI 5; HW 10; IS
2	PI 5; HW 10
3	PI 4.5
4	PI 3.25
5	PI 2.5
6	BI 1.5

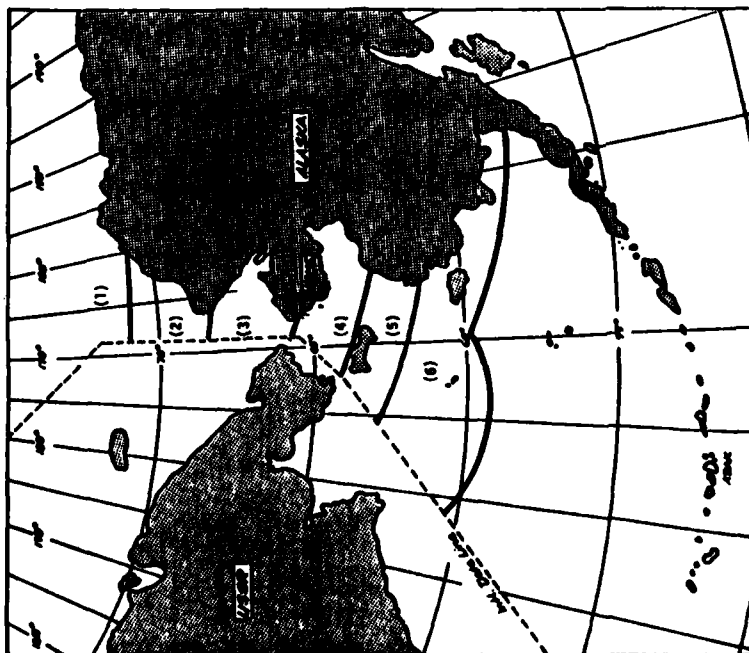


AVERAGE ICE CONDITIONS, MAY

ICE AREA	ICE CHARACTERISTICS
1	PI 5.5; IW 10.5; IS
2	PI 5.5; IW 10.5
3	PI 4.5
4	PI 3.0
5	PI 2.5
6	BI 1.5

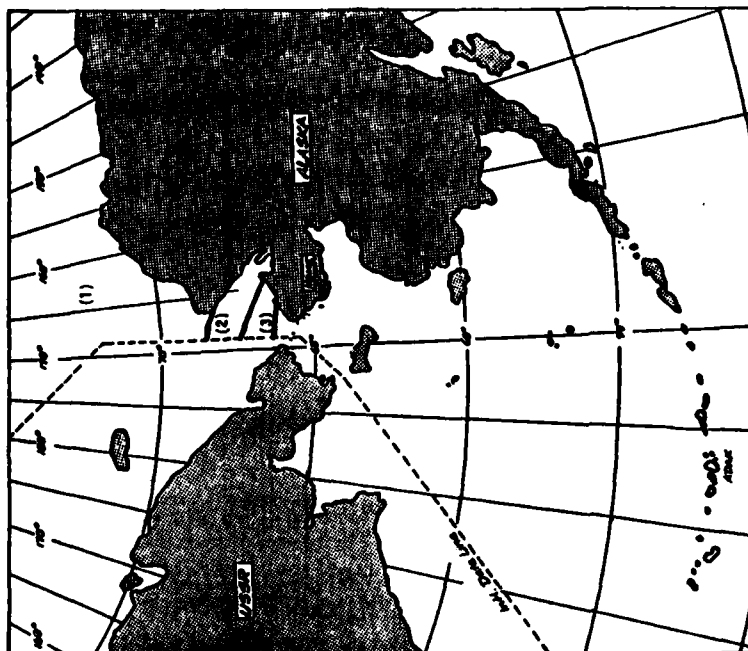


AVERAGE ICE CONDITIONS, JUNE

ICE AREA	ICE CHARACTERISTICS
1	PI 5.5; IW 8.5; IS
2	PI 4.5
3	BI 3.0

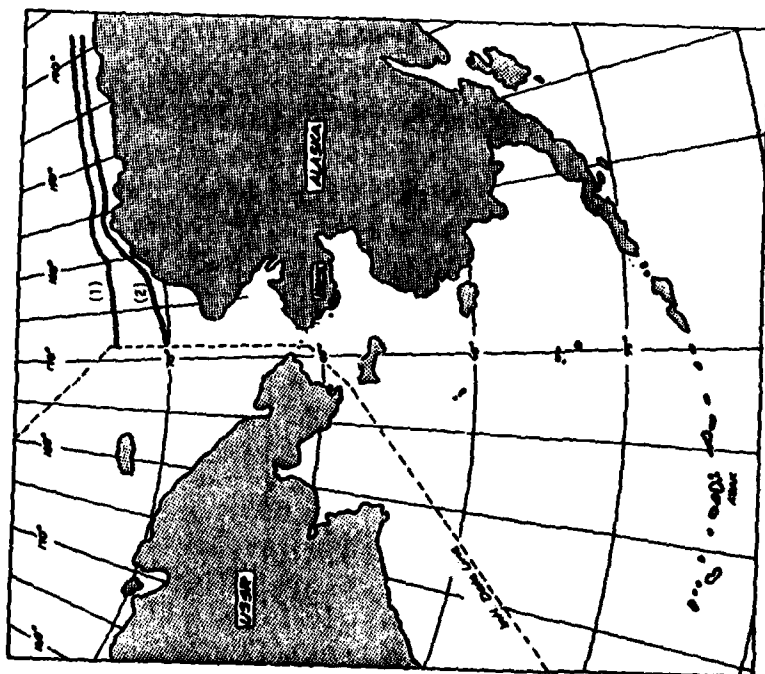


AVERAGE ICE CONDITIONS, JULY

ICE AREA	ICE CHARACTERISTICS
1	PT 4.5; NY 6.5; IS
2	BI 3.0

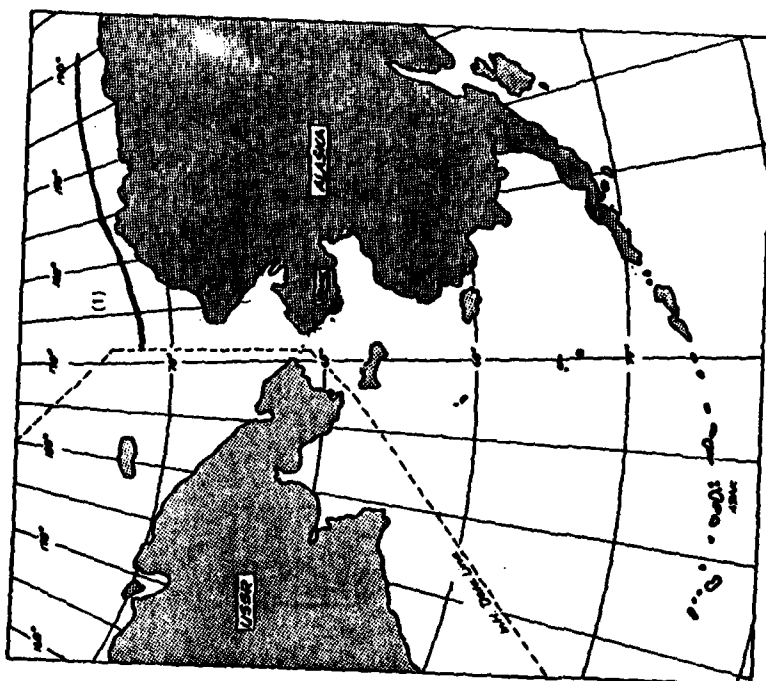


AVERAGE ICE CONDITIONS, AUGUST

ICE AREA	ICE CHARACTERISTICS
1	PT 3; NY 7; IS

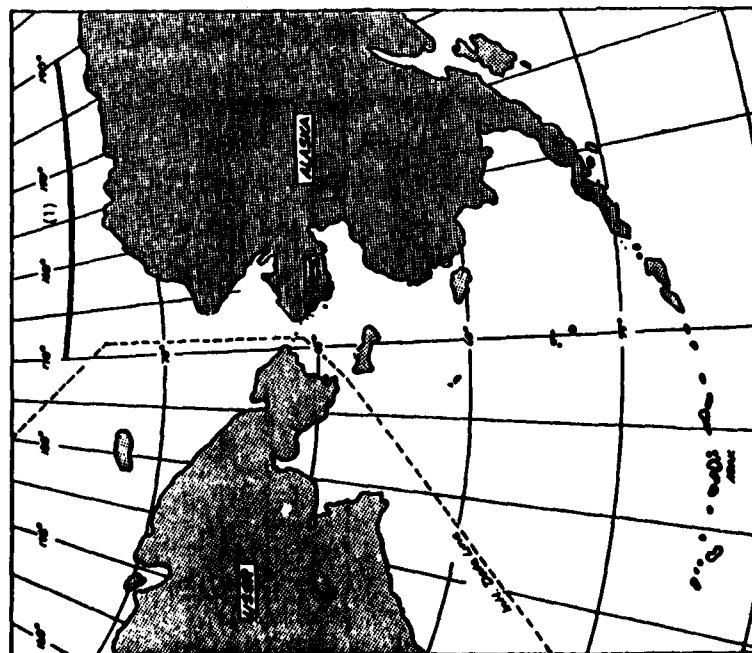


AVERAGE ICE CONDITIONS, SEPTEMBER

ICE AREA	ICE CHARACTERISTICS
1	MY 6; BE 6; IS

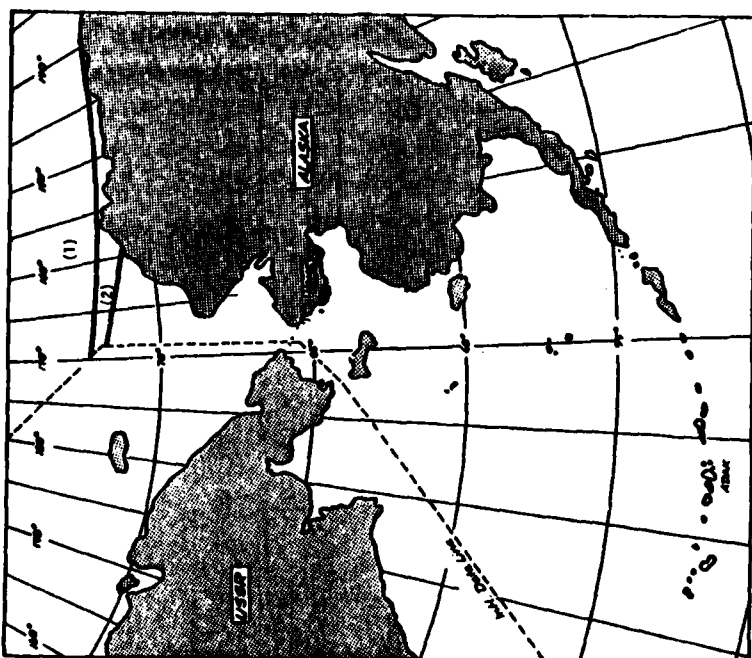


AVERAGE ICE CONDITIONS, OCTOBER

ICE AREA	ICE CHARACTERISTICS
1	PY 1; M 6; IS
2	BI 1

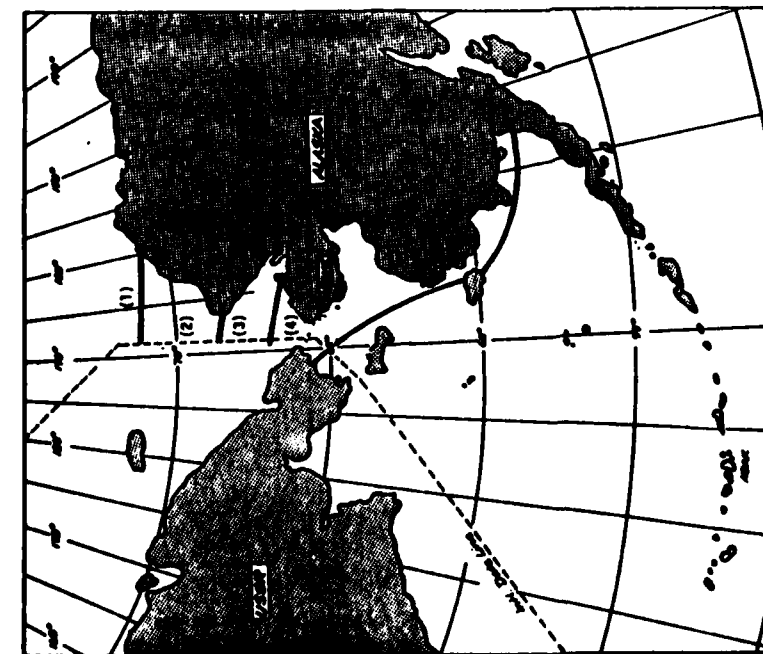

AVERAGE ICE CONDITIONS, NOVEMBER


ICE AREA	ICE CHARACTERISTICS
1	PY 1.5; MW 7; IS
2	PY 1.5; MW 7
3	PY 0.75
4	BI 1

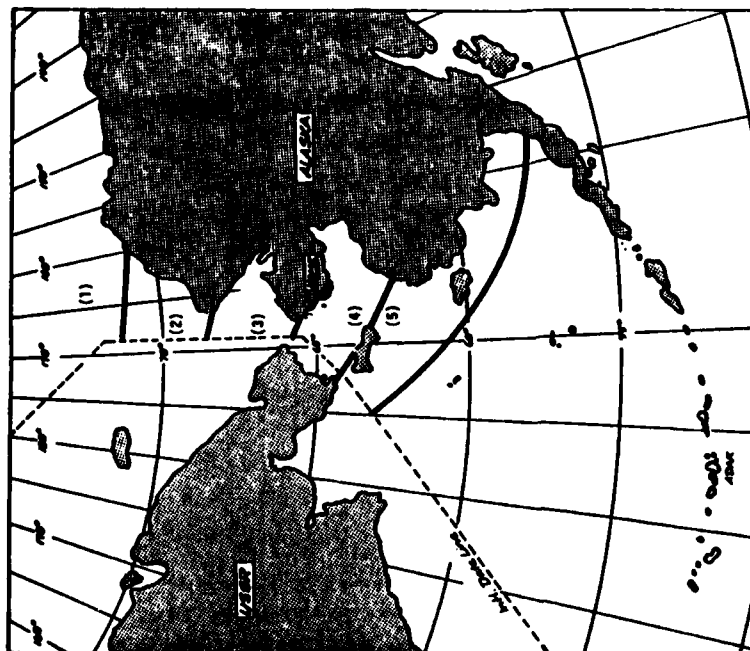


AVERAGE ICE CONDITIONS, DECEMBER

ICE AREA	ICE CHARACTERISTICS
1	PY 2.5; MW 7; IS
2	PY 2.5; MW 7
3	PY 2.0
4	PY 1.25
5	BI 1


APPENDIX A.2
CANADA - MAXIMUM AND AVERAGE ICE CONDITIONS BY MONTH

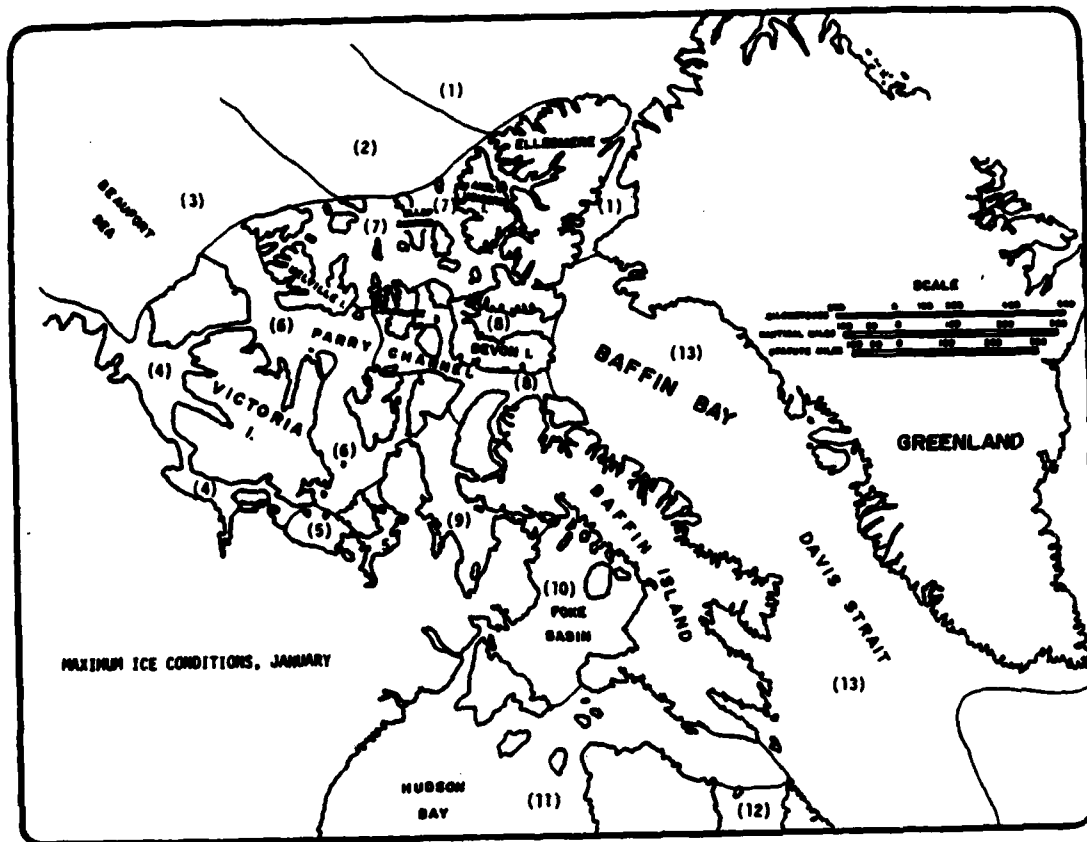


ICE AREA	ICE CHARACTERISTICS
1	PV 5.1-60; HV 20-110; ice islands, icebergs
2	PV 5.1-60; HV 20-100; ice islands
3	PV 5.1-40; HV 20-60; ice islands
4	PV 4.5-40; HV 10-40
5	PV 5.2-40
6	PV 4.5-40; HV 18-40; ice islands
7	PV 5.2-30; HV 18-40; ice islands
8	PV 4.5-40; icebergs, ice islands
9	PV 5.3-40; HV 18-40
10	PV 5.5-40; HV 12-40
11	PV 4.0-30; icebergs
12	PV 4.2-25; icebergs
13	BI 3.0-4.0; icebergs

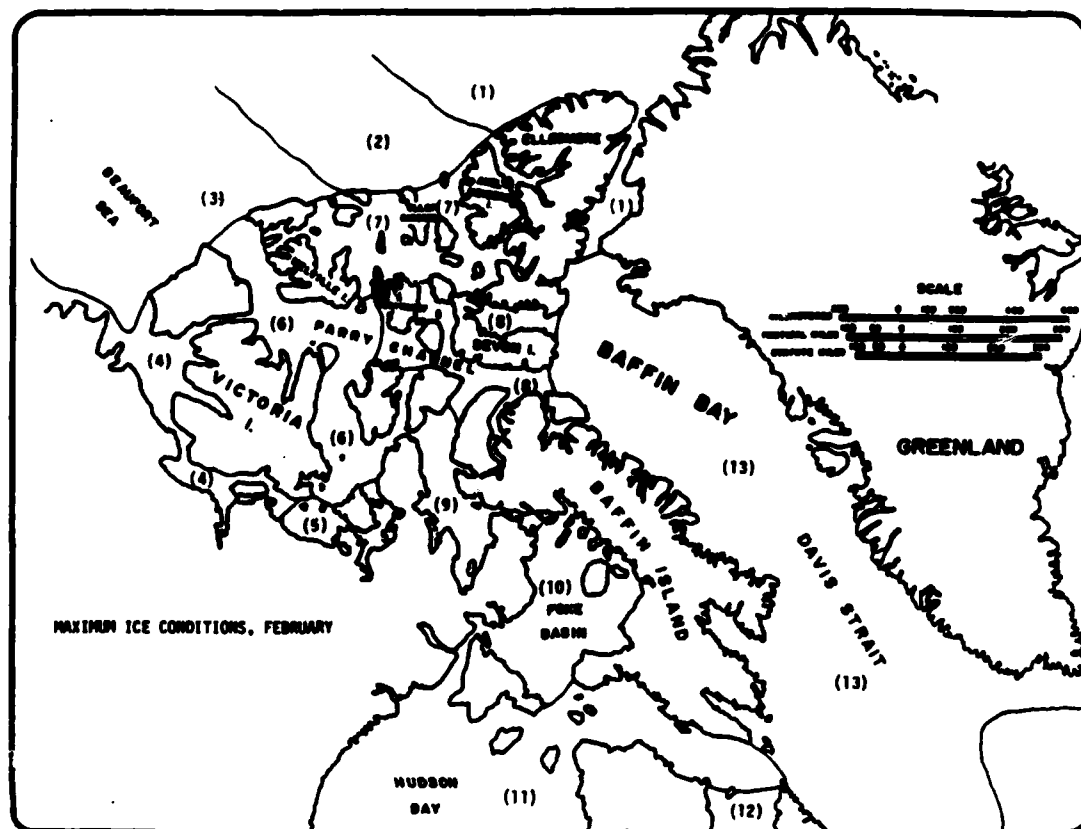


ICE AREA	ICE CHARACTERISTICS
1	FY 5.7-60; MY 20-110; ice islands, icebergs
2	FY 6.5-60; MY 20-100; ice islands
3	FY 6.2-40; MY 20-90; ice islands
4	FY 5.4-40; MY 18-40
5	FY 6.1-40
6	FY 5.6-40; MY 18-40; ice islands
7	FY 5.4-30; MY 18-40; ice islands
8	FY 5.4-40; icebergs, ice islands
9	FY 5.1-40; MY 18-40
10	FY 5.7-40; MY 12-40
11	FY 5.0-30; icebergs
12	FY 4.6-25; icebergs
13	SI 0.9-4.3; icebergs

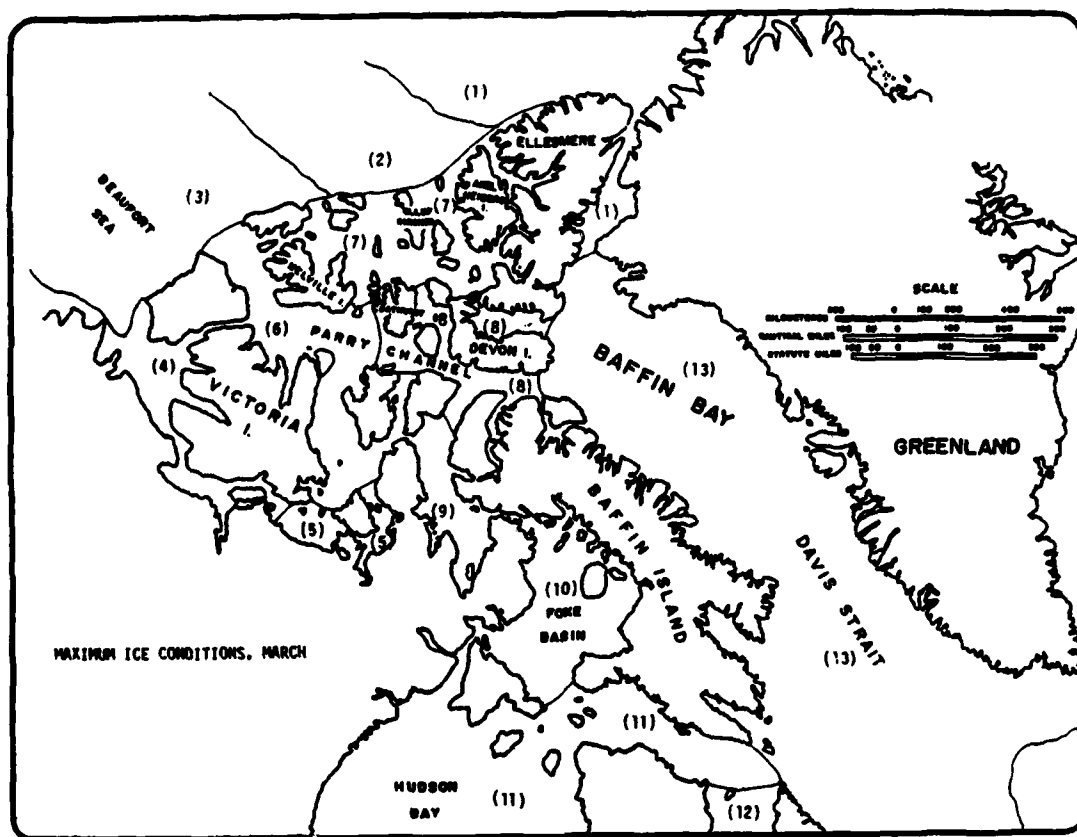


ICE AREA	ICE CHARACTERISTICS
1	FY 6.7-68; NY 22-110; ice islands, icebergs
2	FY 7.7-68; NY 2.-100; ice islands
3	FY 6.2-68; NY 22-90; ice islands
4	FY 6.0-68; NY 19-40
5	FY 6.6-68
6	FY 5.8-68; NY 19-40; ice islands
7	FY 7.3-30; NY 19-40; ice islands
8	FY 5.2-68; icebergs, ice islands
9	FY 7.0-40; NY 19-40
10	FY 6.5-40; NY 13-40
11	FY 5.4-30; icebergs
12	FY 5.1-25; icebergs
13	BT 0.9-5.5; icebergs

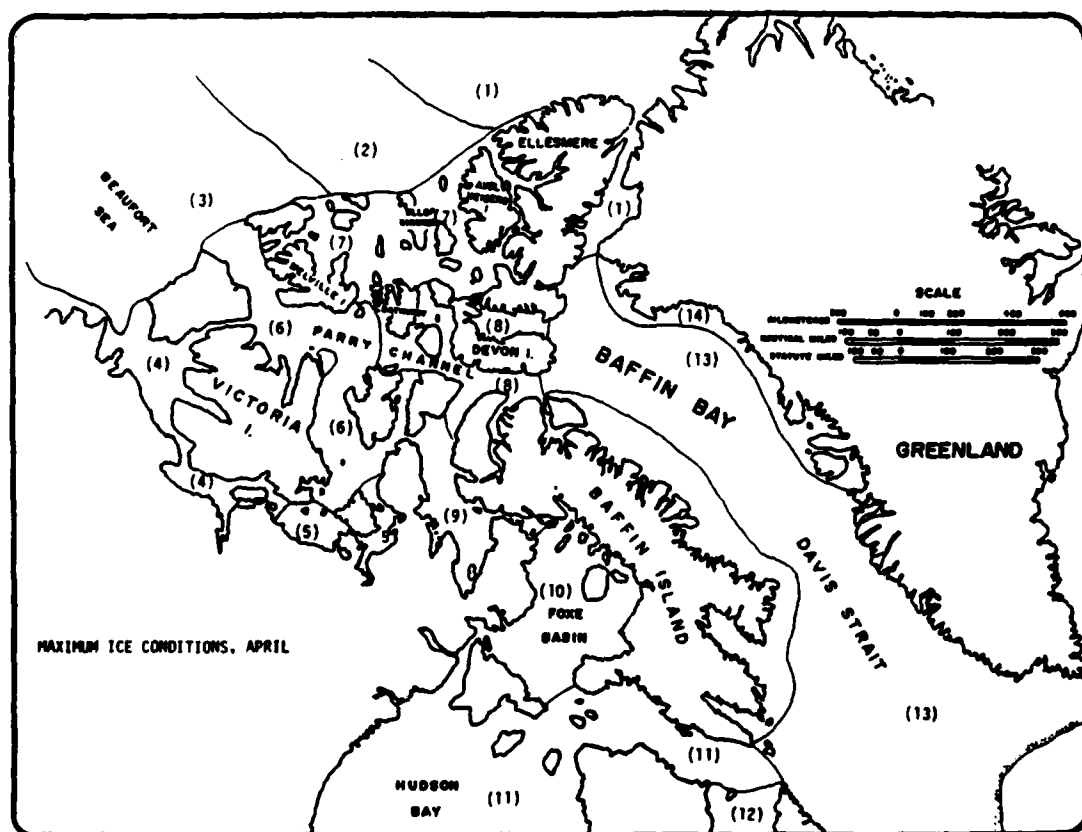


ICE AREA	ICE CHARACTERISTICS
1	PV 7.9-80; NW 22-110; ice islands, icebergs
2	PV 8.0-80; NW 22-100; ice islands
3	PV 6.8-80; NW 22-90; ice islands
4	PV 7.2-80; NW 19-80
5	PV 7.3-80
6	PV 6.9-80; NW 19-80; ice islands
7	PV 7.9-80; NW 19-80; ice islands
8	PV 6.7-80; icebergs, ice islands
9	PV 7.4-80; NW 19-80
10	PV 8.1-80; NW 13-80
11	PV 5.8-80; icebergs
12	PV 5.8-80; icebergs
13	SE 0.9-5.8; icebergs
14	PV 6.3-80; icebergs

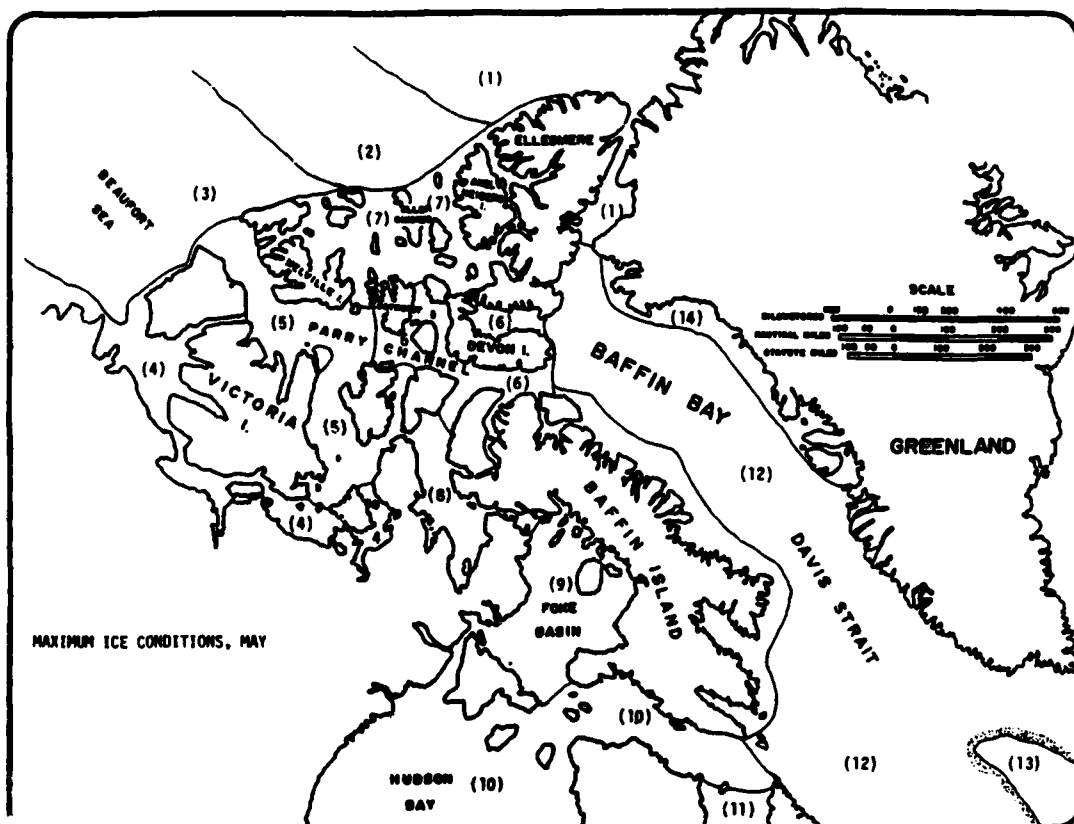


ICE AREA	ICE CHARACTERISTICS
1	FY 8.3-88; HW 22-110; ice islands, icebergs
2	FY 8.3-88; HW 22-100; ice islands
3	FY 7.5-88; HW 22-90; ice islands
4	FY 7.1-88; HW 19-88
5	FY 7.1-88; HW 19-88
6	FY 6.6-88; icebergs, ice islands
7	FY 6.5-38; HW 19-88; ice islands
8	FY 7.5-88; HW 19-88
9	FY 8.2-88; HW 13-88
10	FY 6.2-38; icebergs
11	FY 5.5-28; icebergs
12	91 0.9-8.0; icebergs
13	icebergs
14	FY 5.5-88; icebergs

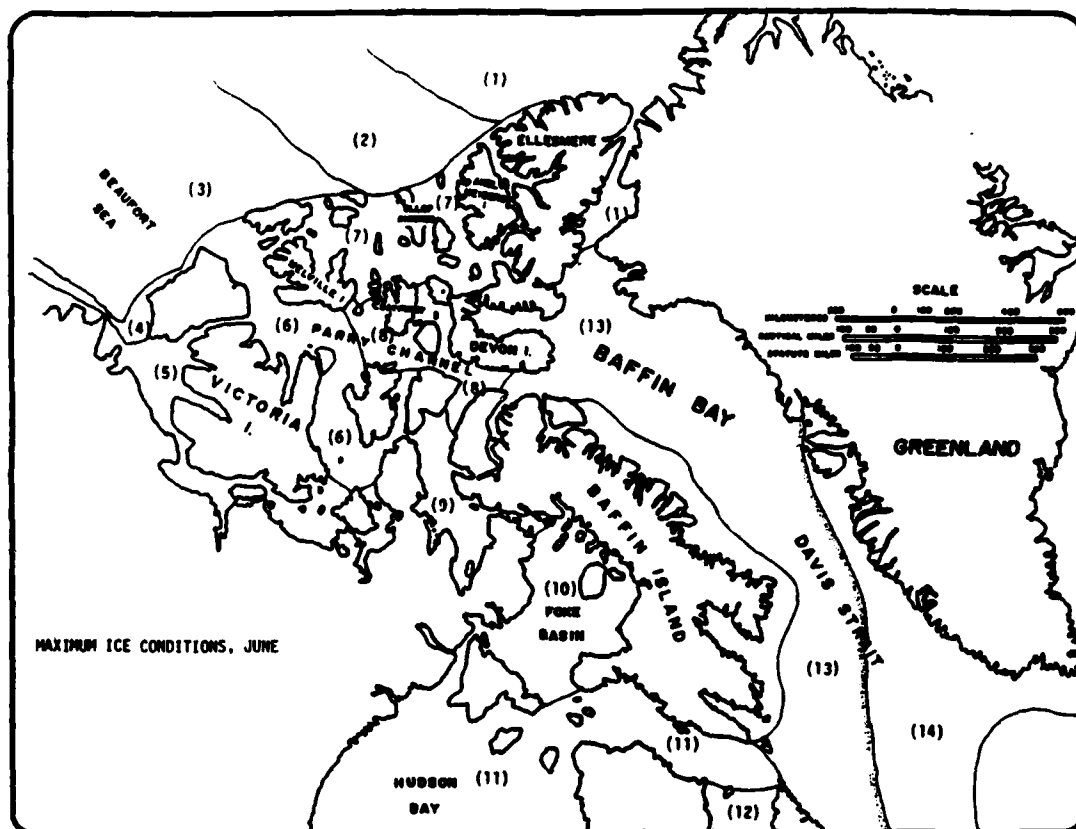


ICE AREA	ICE CHARACTERISTICS
1	FY 7.7-60; HW 22-110; ice islands, icebergs
2	FY 8.2-60; HW 22-100; ice islands
3	FY 7.5-40; HW 22-90; ice islands
4	SI 0.9-6.5
5	FY 7.0-40; HW 19-40
6	FY 7.5-40; HW 19-40; icebergs, ice islands
7	FY 8.0-30; HW 19-40; ice islands
8	FY 7.2-40; ice islands
9	FY 6.2-40; HW 19-40
10	FY 7.5-40; HW 19-40
11	FY 6.0-30; icebergs
12	FY 5.4-25; icebergs
13	SI 3.3-5.0; icebergs
14	icebergs

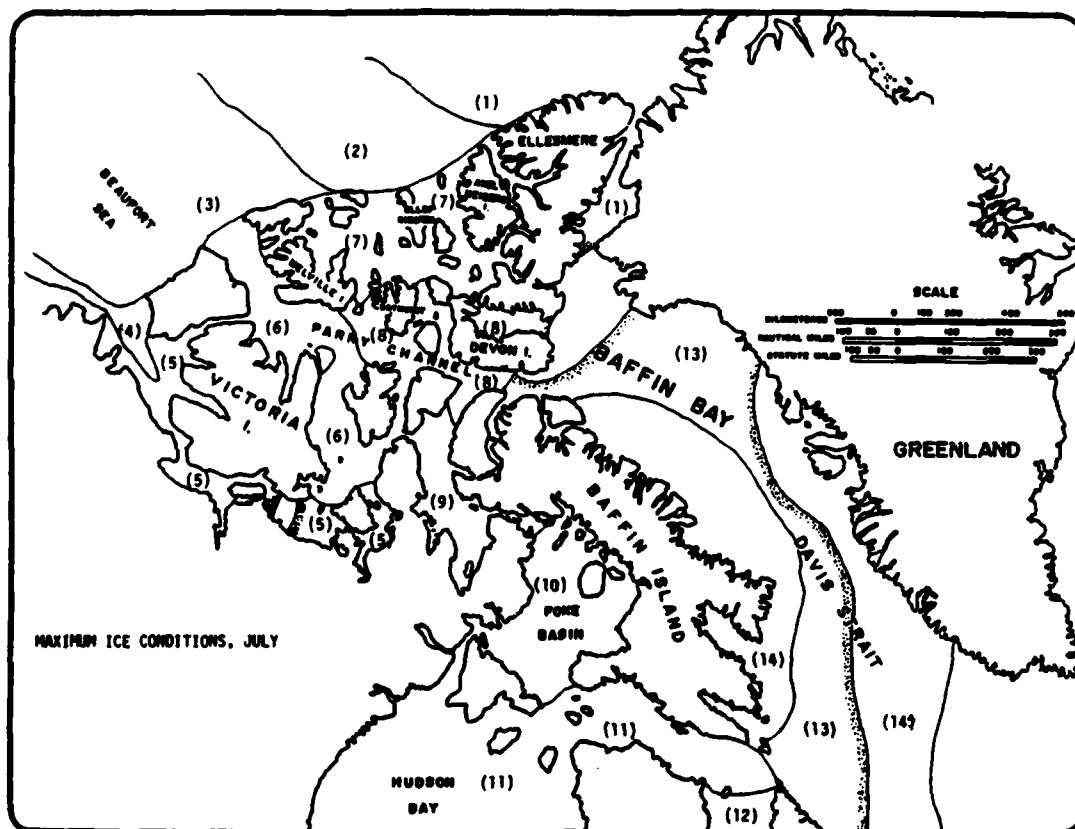


ICE AREA	ICE CHARACTERISTICS
1	PY 6.0-60; HY 22-110; ice islands, icebergs
2	PY 7.5-60; HY 22-100; ice islands
3	PY 6.8-40; HY 22-90; ice islands
4	SI 0.8-4.8
5	PY 3.8-30; HY 19-40
6	PY 5.0-30; HY 19-40; icebergs, ice islands
7	PY 7.2-30; HY 19-40; ice islands
8	PY 3.3-30; ice islands
9	PY 4.2-30; HY 19-40
10	PY 5.0-30; HY 19-40
11	SI 0.8-3.0; icebergs
12	SI 0.8-2.0; icebergs
13	SI 0.7-3.5; icebergs
14	SI 0.8-3.5; icebergs

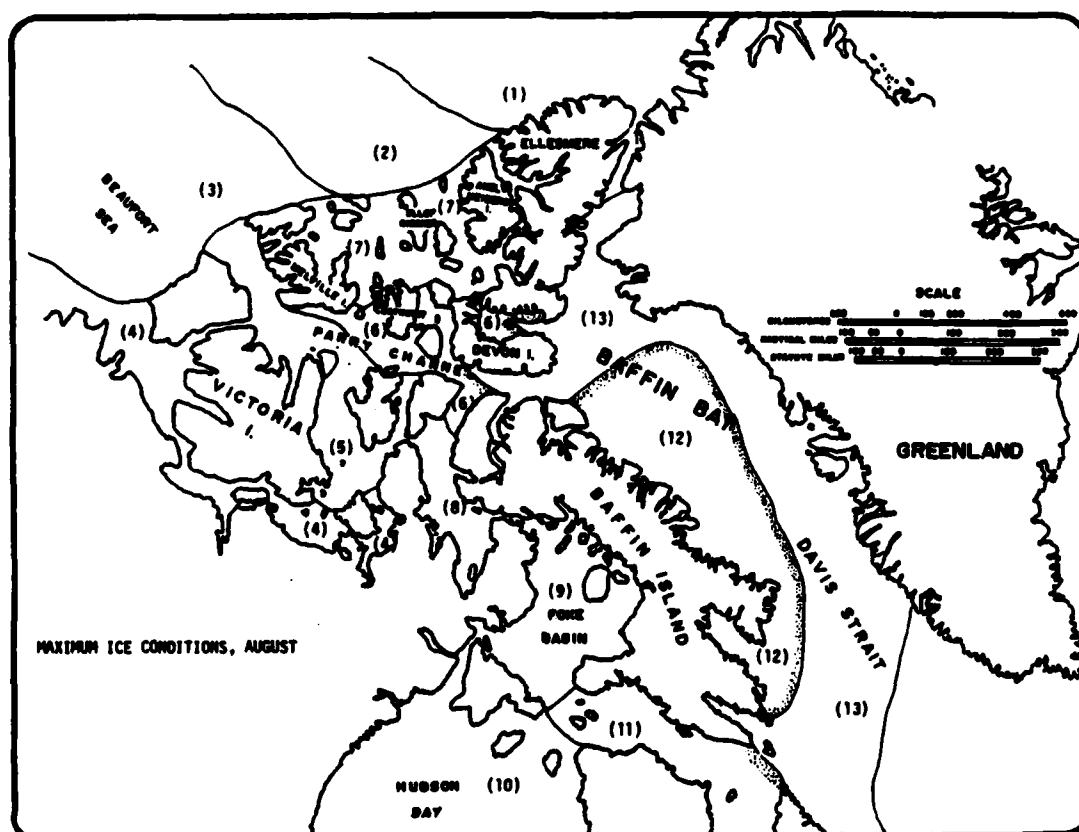


ICE AREA	ICE CHARACTERISTICS
1	PI 4.0-6.0; HI 20-110; ice islands, icebergs
2	PI 5.0-6.0; HI 20-100; ice islands
3	PI 5.5-40; HI 20-90; ice islands
4	SI 0.6-2.6; icebergs
5	SI 0.9-5.0; icebergs, ice islands
6	SI 0.7-2.0; icebergs, ice islands
7	PI 4.5-30; HI 17-40; ice islands
8	PI 2.0-20; HI 17-40
9	PI 2.5-20; HI 17-40
10	SI 0.5-1.5; icebergs
11	SI 0.7-1.6; icebergs
12	SI 0.7-2.0; icebergs
13	icebergs

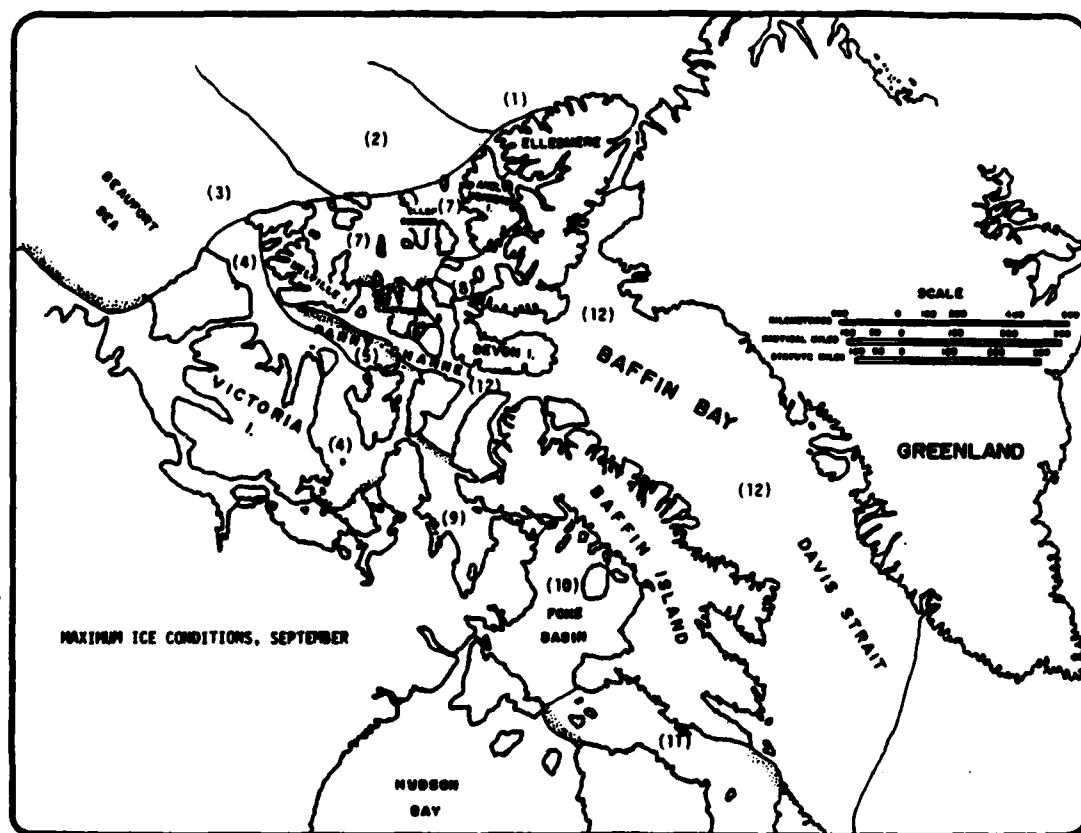


ICE AREA	ICE CHARACTERISTICS
1	FY 1.0-60; HW 20-110; icebergs, ice islands
2	FY 1.1-60; HW 20-100; ice islands
3	FY 0.9-40; HW 20-90; ice islands
4	BI 0.7-5.0; ice islands
5	BI 0.5-4.0; icebergs
6	BI 0.4-2.0; icebergs
7	FY 0.8-30; HW 17-40; ice islands
8	BI 0.8-4.5; ice islands
9	FY 1.0-30; HW 17-40
10	BI 0.7-1.5; icebergs
11	BI 0.4-1.0; icebergs
12	icebergs

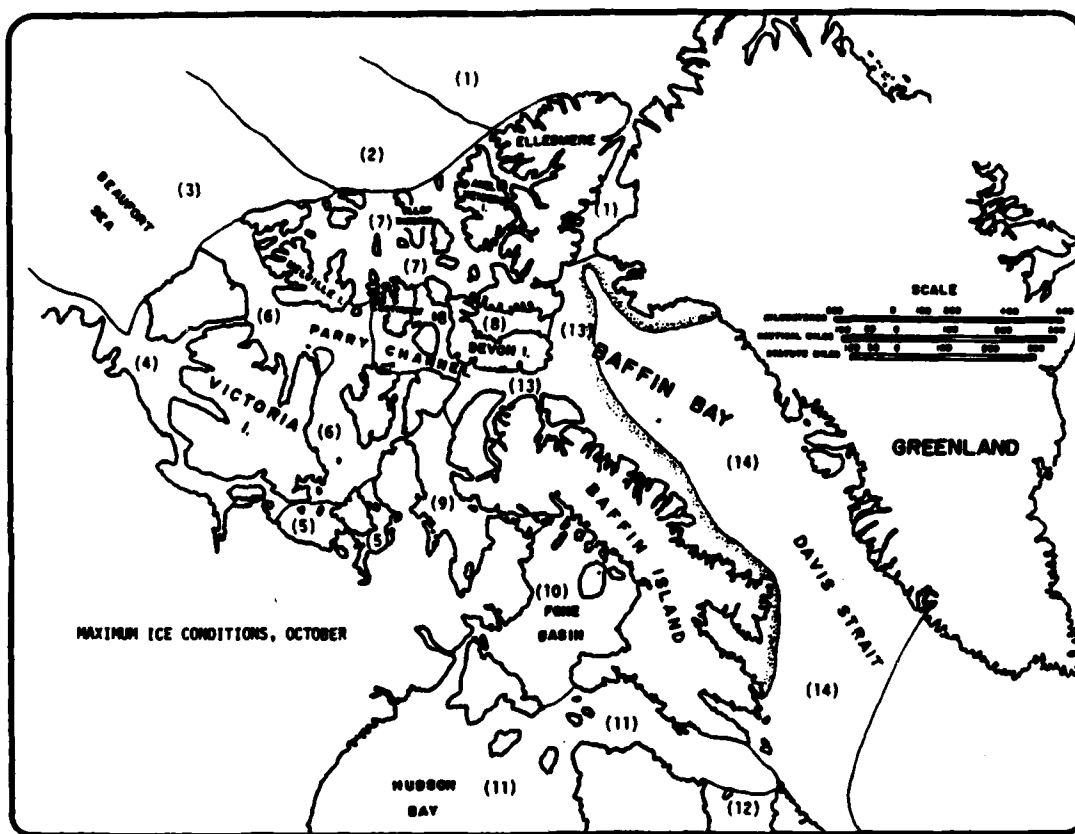


ICE AREA	ICE CHARACTERISTICS
1	FY 2.7-60; HW 18-110; ICE ISLANDS, ICEBERGS
2	FY 3.6-60; HW 18-100; ICE ISLANDS
3	FY 1.5-40; HW 18-90; ICE ISLANDS
4	FY 1.0-30; HW 16-40
5	FY 1.1-30
6	FY 1.3-30; HW 16-40; ICE ISLANDS
7	FY 2.0-30; HW 16-40; ICE ISLANDS
8	FY 1.2-40; HW 16-40
9	FY 1.2-30; HW 16-40
10	FY 0.6-30; ICEBERGS
11	FY 0.5-20; ICEBERGS
12	FY 0.8-20; ICEBERGS
13	SI 3.9-20; ICEBERGS
14	ICEBERGS

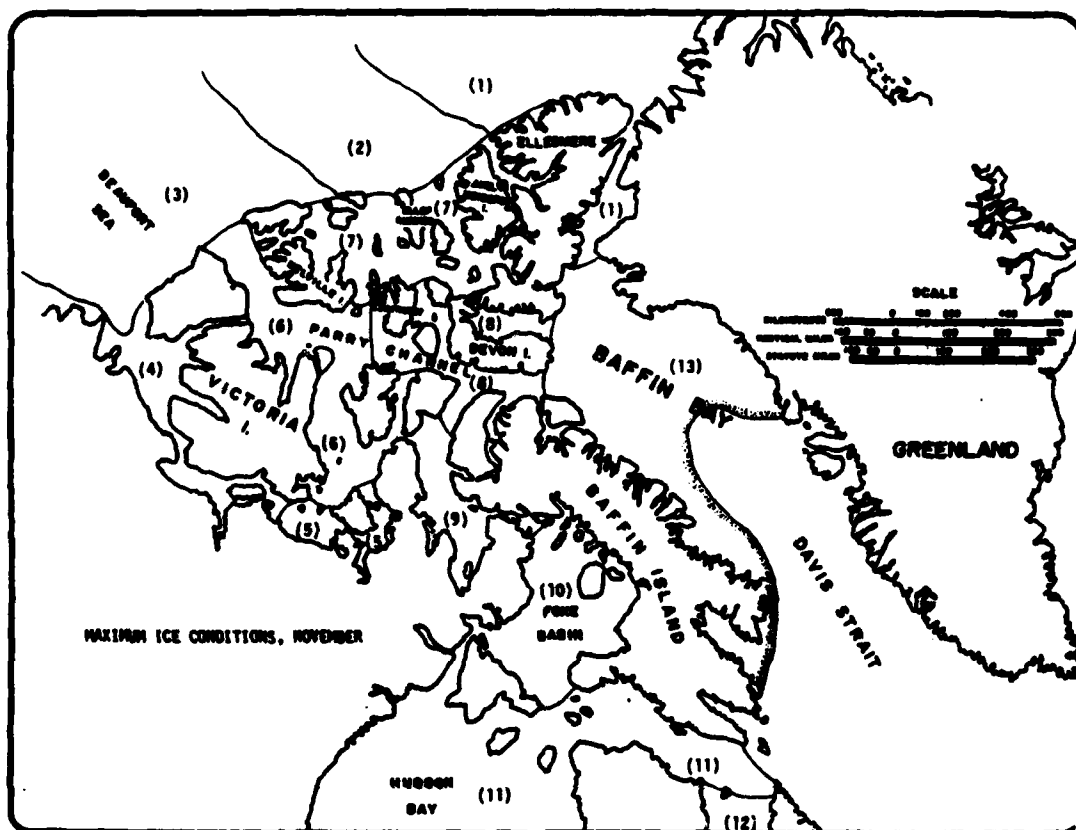


ICE AREA	ICE CHARACTERISTICS
1	PI3.7-80; NY 10-110; ICE ISLANDS, ICEBERGS
2	PI4.3-80; NY 10-100; ICE ISLANDS
3	PI2.7-40; NY 10-80; ICE ISLANDS
4	PI2.6-40; NY 10-40
5	PI3.0-40
6	PI2.7-40; NY 10-40; ICE ISLANDS
7	PI3.7-30; NY 10-40; ICE ISLANDS
8	PI2.7-40; ICEBERGS, ICE ISLANDS
9	PI2.6-40; NY 10-40
10	PI3.0-40; NY 10-40
11	PI1.5-30; ICEBERGS
12	PI1.5-25; ICEBERGS
13	PI0.9-1.4; ICEBERGS

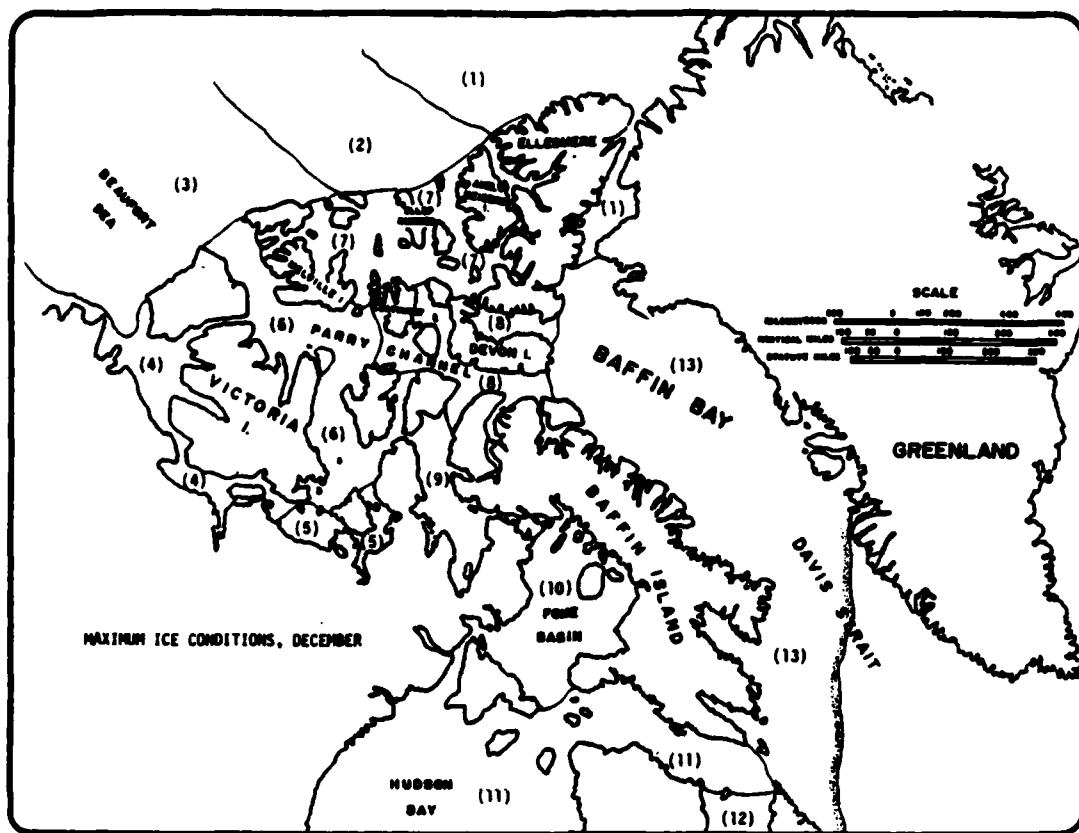


ICE AREA	ICE CHARACTERISTICS
1	FY 4.2-60; HY 20-110; ICE ISLANDS, ICEBERGS
2	FY 4.8-60; HY 20-100; ICE ISLANDS
3	FY 4.1-40; HY 20-80; ICE ISLANDS
4	FY 3.8-40; HY 18-60
5	FY 3.8-40
6	FY 3.8-40; HY 18-40; ICE ISLANDS
7	FY 4.3-30; HY 18-40; ICE ISLANDS
8	FY 3.8-40; ICEBERGS, ICE ISLANDS
9	FY 3.6-40; ICEBERGS, ICE ISLANDS
10	FY 4.0-40; HY 12-40
11	FY 2.5-30; ICEBERGS
12	FY 2.0-25; ICEBERGS
13	SI 3.9-2.8; ICEBERGS

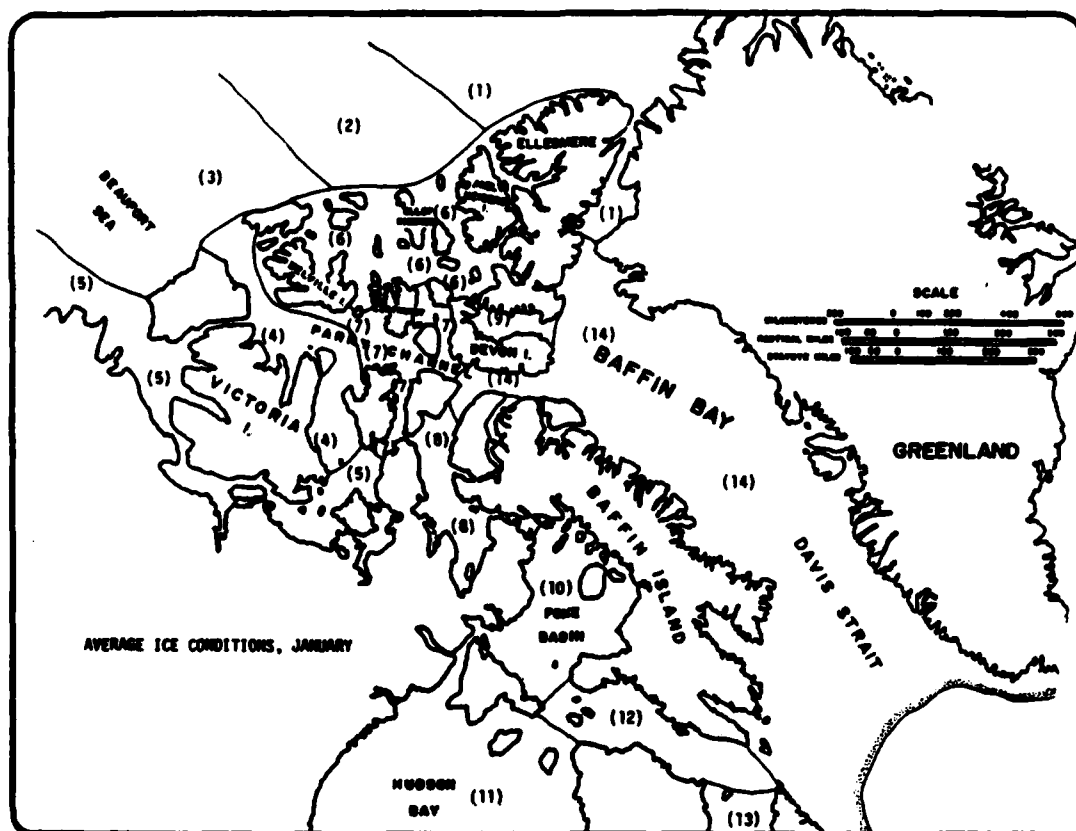


ICE AREA	ICE CHARACTERISTICS
1	FY 4.5-60; HW 15.0-100; ice islands
2	FY 4.2-60; HW 15.0-110; ice islands
3	FY 4.0-60; HW 15.0-60.0; ice islands
4	FY 3.5-40; HW 12.0-60.0
5	FY 3.0-25.0; HW 12.0-40.0
6	FY 4.5-25.0; HW 12.0-40.0
7	HW 1.5-20.0; HW 10.0-40.0
8	FY 4.0-40.0
9	FY 4.5-25.0
10	FY 3.0-20.0; HW 15.0-40.0
11	FY 3.5-20.0
12	FY 2.5-25.0; icebergs
13	FY 3.5-25.0; icebergs
14	SI 0.5-2.0; icebergs

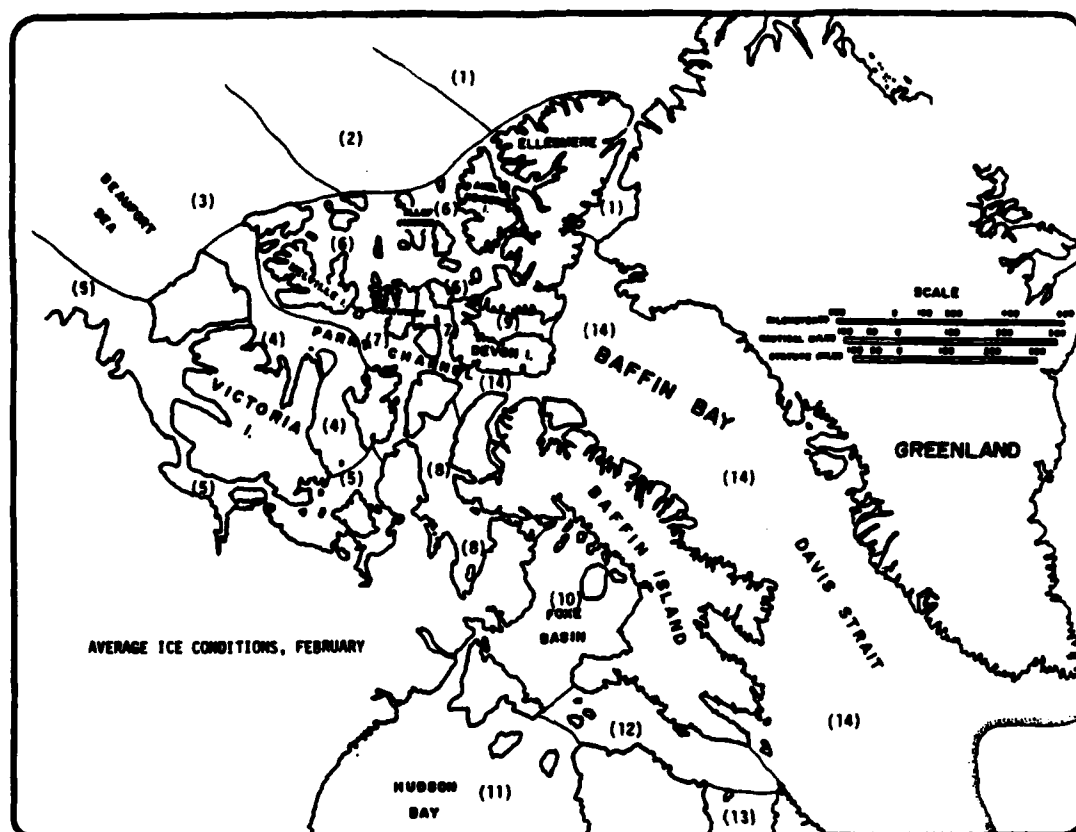


ICE AREA	ICE CHARACTERISTICS
1	PY 5.1-88.0; HY 15.0-108.0; ice islands
2	PY 5.3-88.0; HY 15.0-110.0; ice islands
3	PY 4.9-48.0; HY 15.0-88.0; ice islands
4	PY 4.7-48.0; HY 12.0-88.0
5	PY 4.5-25.0; HY 12.0-48.0
6	PY 5.3-25.0; HY 12.0-48.0
7	PY 4.6-38.0; HY 10.0-48.0
8	PY 5.3-48.0
9	PY 5.0-25.0
10	PY 4.6-38.0; HY 15.0-48.0
11	PY 4.6-20.0
12	PY 4.0-25.0; icebergs
13	PY 4.4-25.0; icebergs
14	SI 0.9-1.4; icebergs

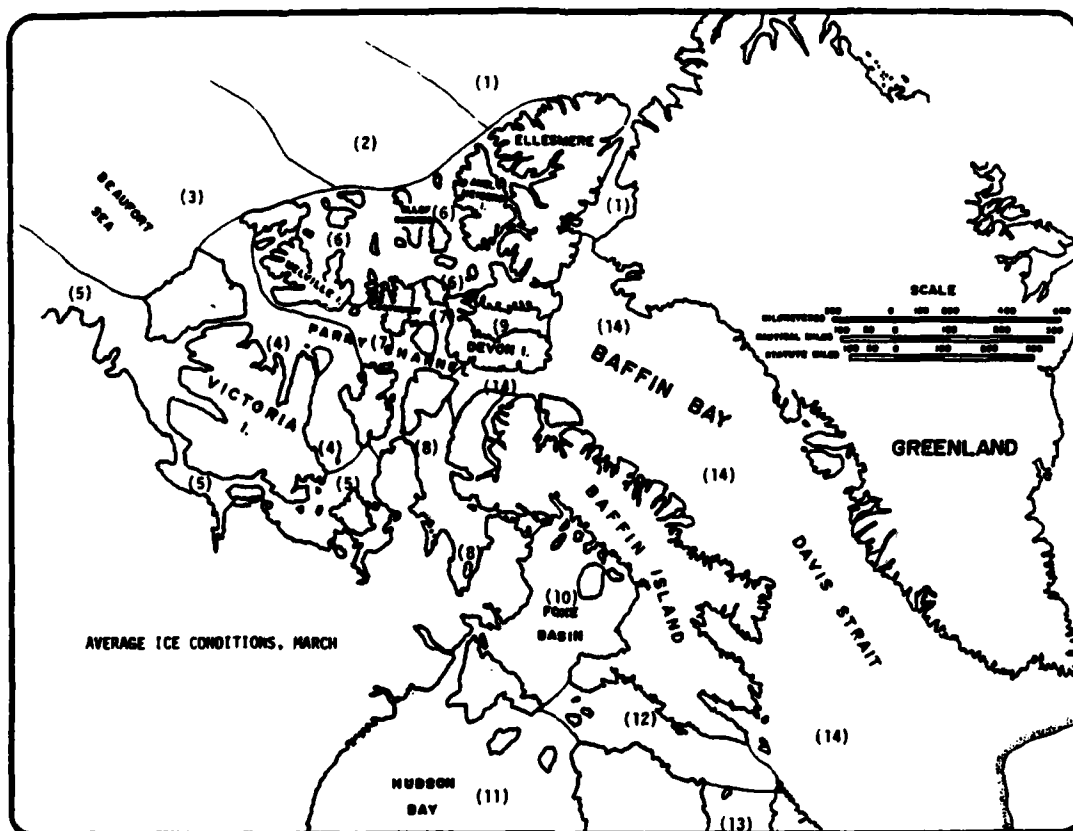


ICE AREA	ICE CHARACTERISTICS
1	FY 5.3-60.0; NY 17.0-100.0; ice islands
2	FY 6.1-60.0; NY 17.0-110.0; ice islands
3	FY 5.3-40.0; NY 17.0-60.0; ice islands
4	FY 5.2-40.0; NY 14.0-60.0;
5	FY 5.6-25.0; NY 14.0-40.0
6	FY 6.3-25.0; NY 14.0-40.0
7	FY 5.2-30.0; NY 12.0-40.0
8	FY 6.0-40.0;
9	FY 5.7-25.0
10	FY 5.4-30.0; NY 17.0-40.0
11	FY 4.9-20.0
12	FY 4.5-25.0; icebergs
13	FY 4.8-25.0; icebergs
14	SI 3.9-1.8; icebergs

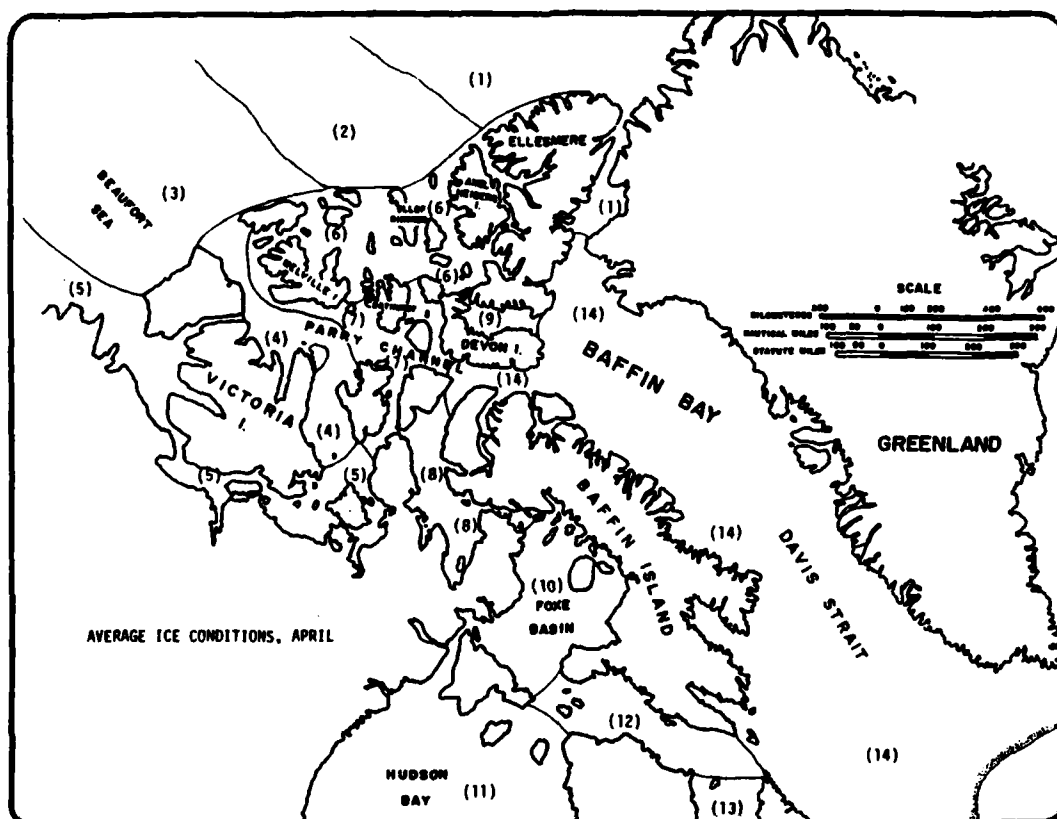


ICE AREA	ICE CHARACTERISTICS
1	FY 6.4-60.0; HY 17.0-100.0; ice islands
2	FY 6.8-60.0; HY 17.0-110.0; ice islands
3	FY 5.5-60.0; HY 17.0-60.0; ice islands
4	FY 5.4-40.0; HY 14.0-60.0
5	FY 6.0-25.0; HY 16.0-40.0
6	FY 6.9-25.0; HY 16.0-40.0
7	FY 5.7-30.0 HY 12.0-40.0
8	FY 6.7-40.0
9	FY 5.2-25.0
10	FY 6.1-30.0; HY 17.0-40.0
11	FY 5.5-20.0
12	FY 5.1-25.0; icebergs
13	FY 5.3-25.0; icebergs
14	SI 3.0-4.2; icebergs

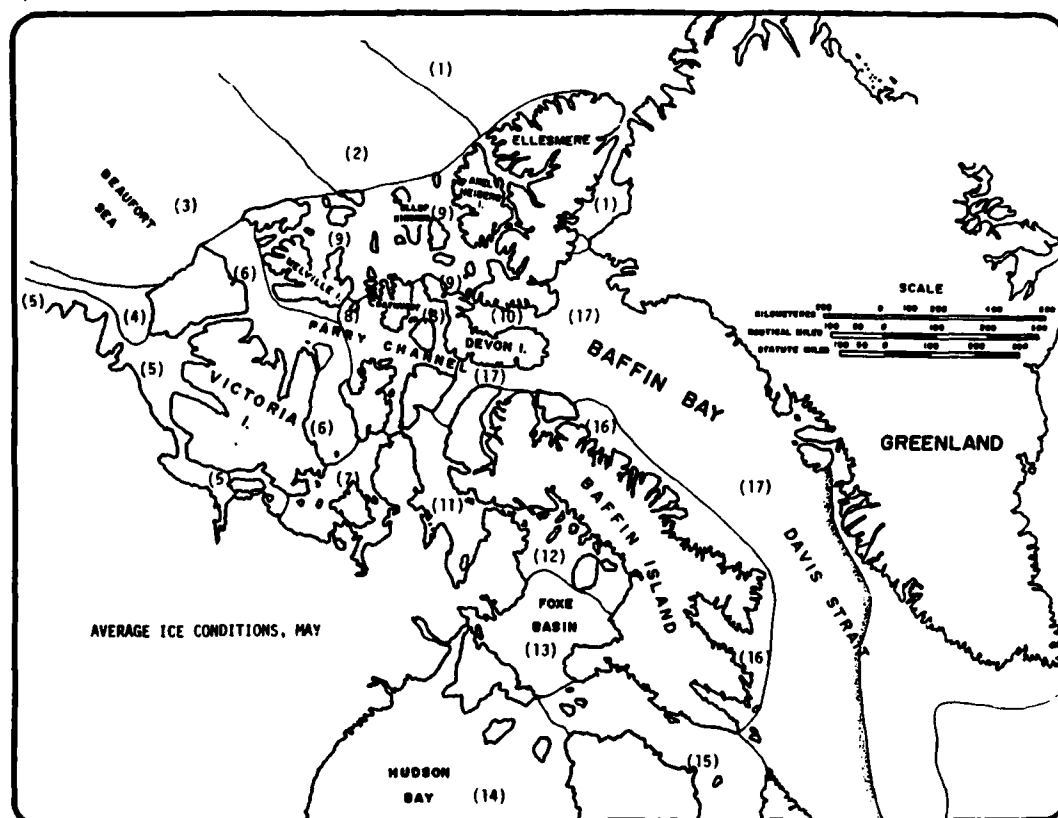


ICE AREA	ICE CHARACTERISTICS
1	FY 6.7-60; MY 18.0-100.0; ice islands
2	FY 7.3-60; MY 18.0-110.0; ice islands
3	FY 6.1-40.0; MY 18.0-60.0; ice islands
4	SI 0.9-6.0
5	FY 6.7-25.0; MY 15.0-40.0
6	FY 6.5-40.0; MY 15.0-60.0
7	FY 7.0-40.0; MY 15.0-40.0
8	FY 6.0-30.0; MY 12.5-40.0
9	FY 7.4-25.0; MY 16.0-40.0
10	FY 5.5-25.0
11	FY 7.0-40.0
12	FY 6.4-40.0
13	SI 3.9-5.4
14	SI 0.9-5.5
15	SI 0.9-4.7; icebergs
16	FY 4.8-25.0
17	SI 3.9-4.5; icebergs

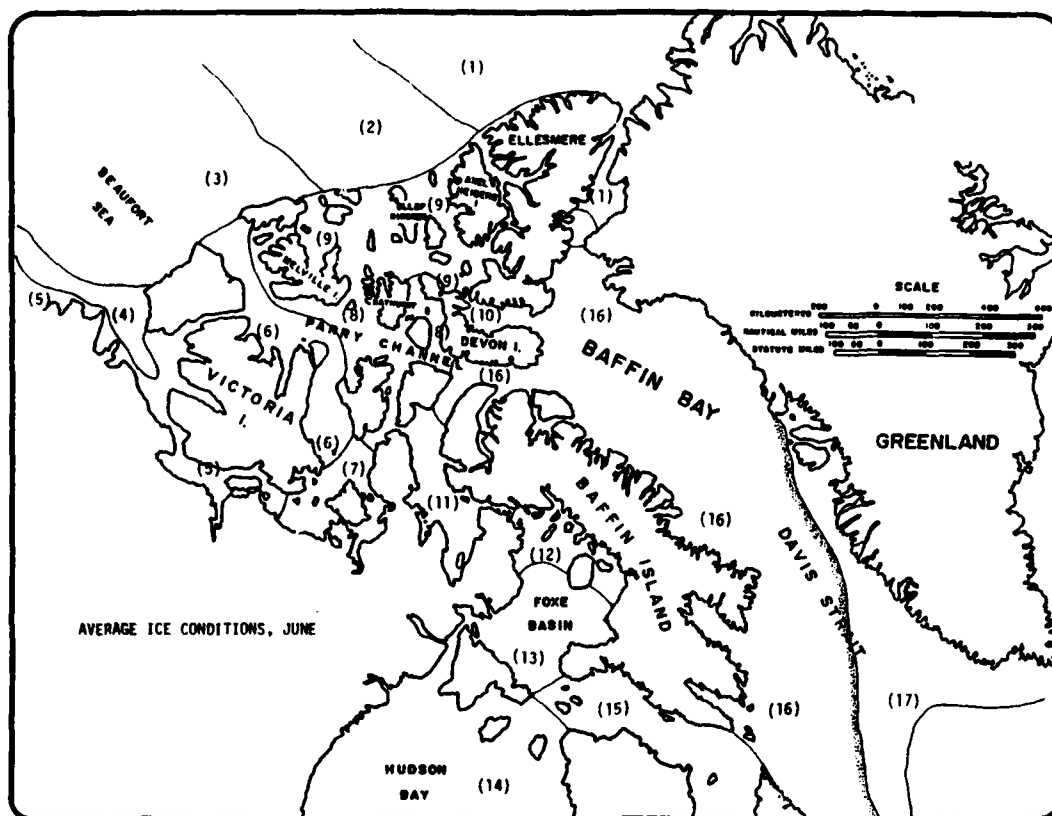


ICE AREA	ICE CHARACTERISTICS
1	FY 6.2-60; MY 18-100; ice islands
2	FY 7.4-60; MY 18-110; ice islands
3	FY 6.8-40; MY 18-60; ice islands
4	SI 0.9-4.5
5	FY 5.9-25.0; MY 15-40
6	FY 6.3-40; MY 15-60
7	FY 6.0-40; MY 15-40
8	FY 6.5-30; MY 12.5-40
9	FY .73-25; MY 16-40
10	FY 6.5-25
11	FY 5.8-40
12	FY 6.2-40
13	SI 0.8-5.0
14	SI 2.7-5.0
15	SI 3.7-4.2; icebergs
16	SI 3.8-5.0; icebergs
17	icebergs

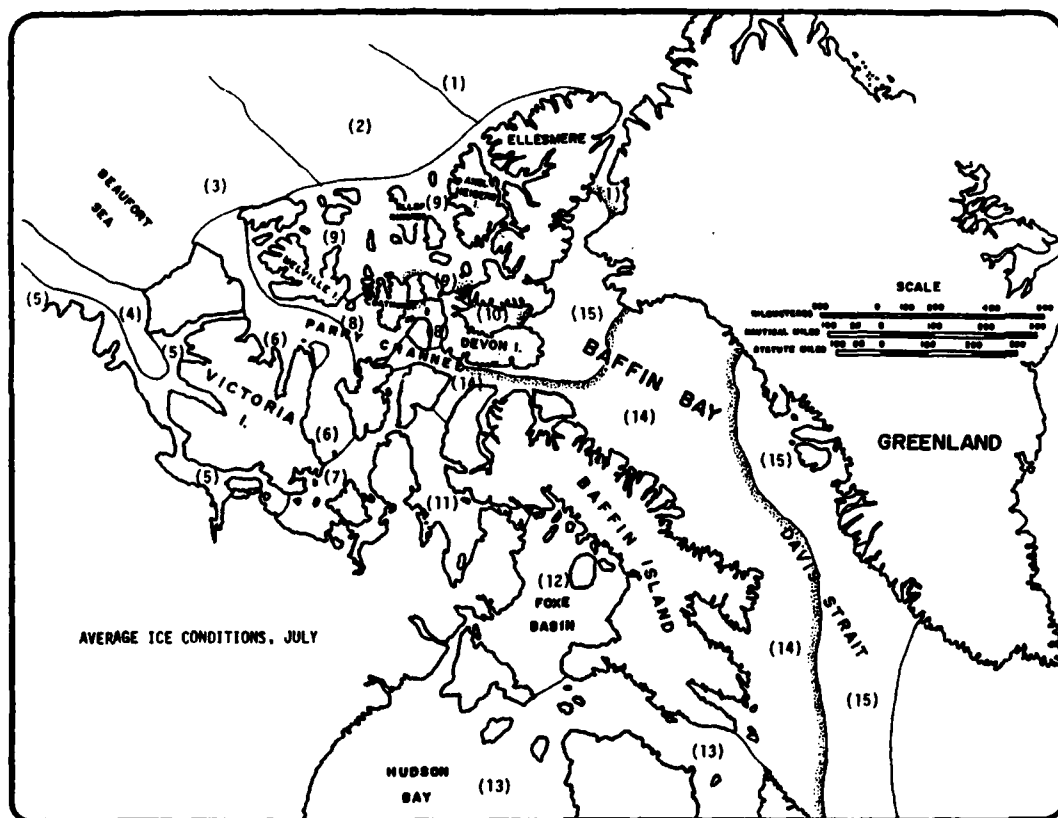


ICE AREA	ICE CHARACTERISTICS
1	PY 5.2-60; NY 18-100; ice islands
2	PY 6.7-60; NY 18-110; ice islands
3	PY 5.8-40; NY 18-60; ice islands
4	SI 0.8-3.0
5	PY 3.0-25; NY 15-40
6	PY 4.7-40; NY 15-60
7	PY 4.0-40; NY 15-40
8	PY 4.5-30; NY 12.5-42
9	PY 6.0-25; NY 16-40
10	PY 4.7-25
11	PY 4.2-40
12	SI 0.8-4.0
13	SI 3.5-3.5
14	SI 0.7-3.0
15	icebergs

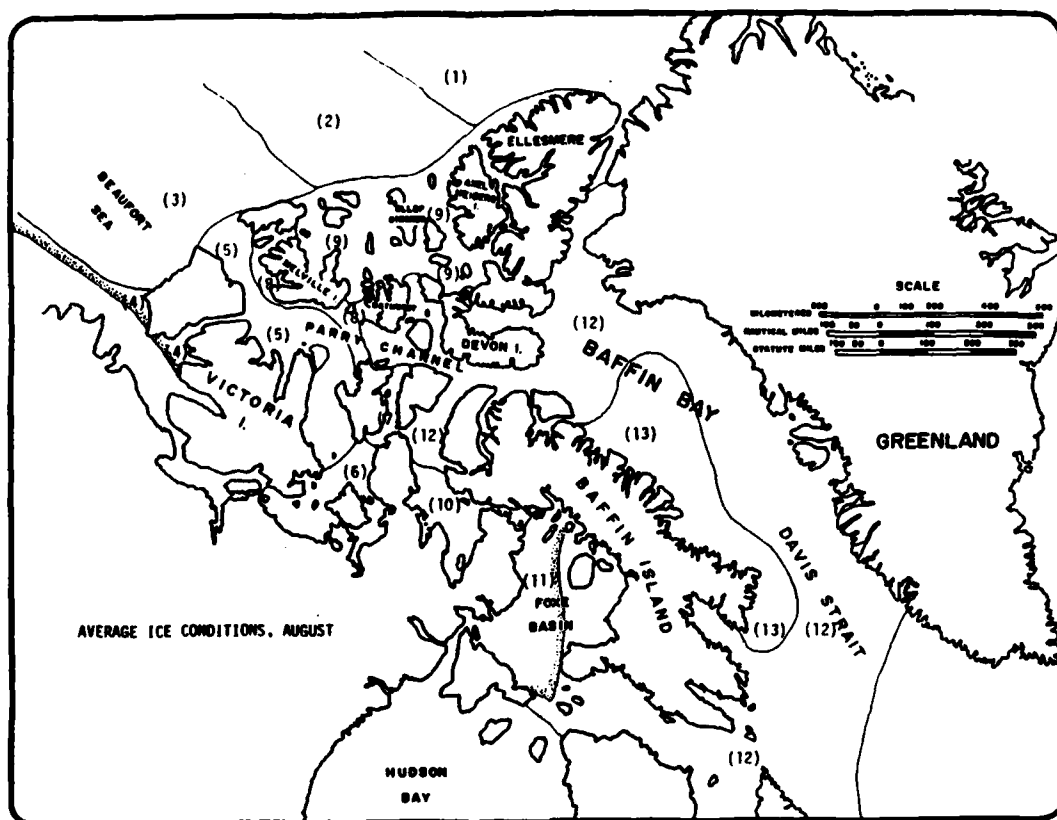


ICE AREA	ICE CHARACTERISTICS
1	FY 4.3-60; MY 16-100; ice islands
2	FY 6.0-60; MY 16-110; ice islands
3	FY 5.5-40; MY 16-60; ice islands
4	SI 0.6-2.5; icebergs
5	FY 2.5-40; MY 15-60
6	SI 0.9-2.5; icebergs
7	FY 3.0-40
8	FY 3.2-30; MY 11-40
9	FY 4.0-25; MY 16-40
10	FY 2.2-40
11	SI 0.6-1.5
12	icebergs
13	SI 0.5-2.0; icebergs

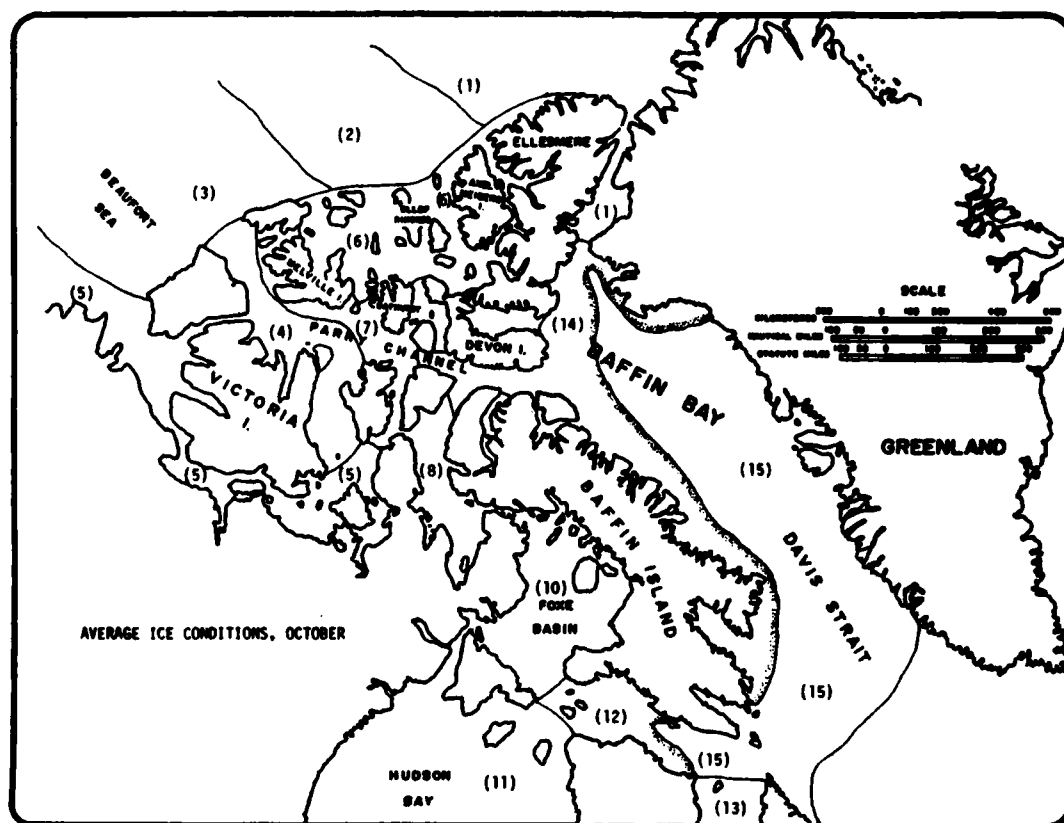

ICE AREA	ICE CHARACTERISTICS
1	PY 1.5-60; HW 12-100; ice islands
2	PY 1.5-60; HW 12-110; ice islands
3	PY 1.5-40; HW 10-60; ice islands
4	PY 1.1-40; HW 10-80
5	PY 0.8-30; HW 10-40
6	PY 1.4-20; HW 10-40
7	PY 0.8-20; HW 8.5-40
8	PY 0.9-20
9	PY 1.2-20
10	PY 0.5-10; HW 12-40
11	SI 0.7-0.8
12	SI 0.8-0.9
13	PY 0.7-10; icebergs
14	SI 0.8-0.9; icebergs
15	icebergs

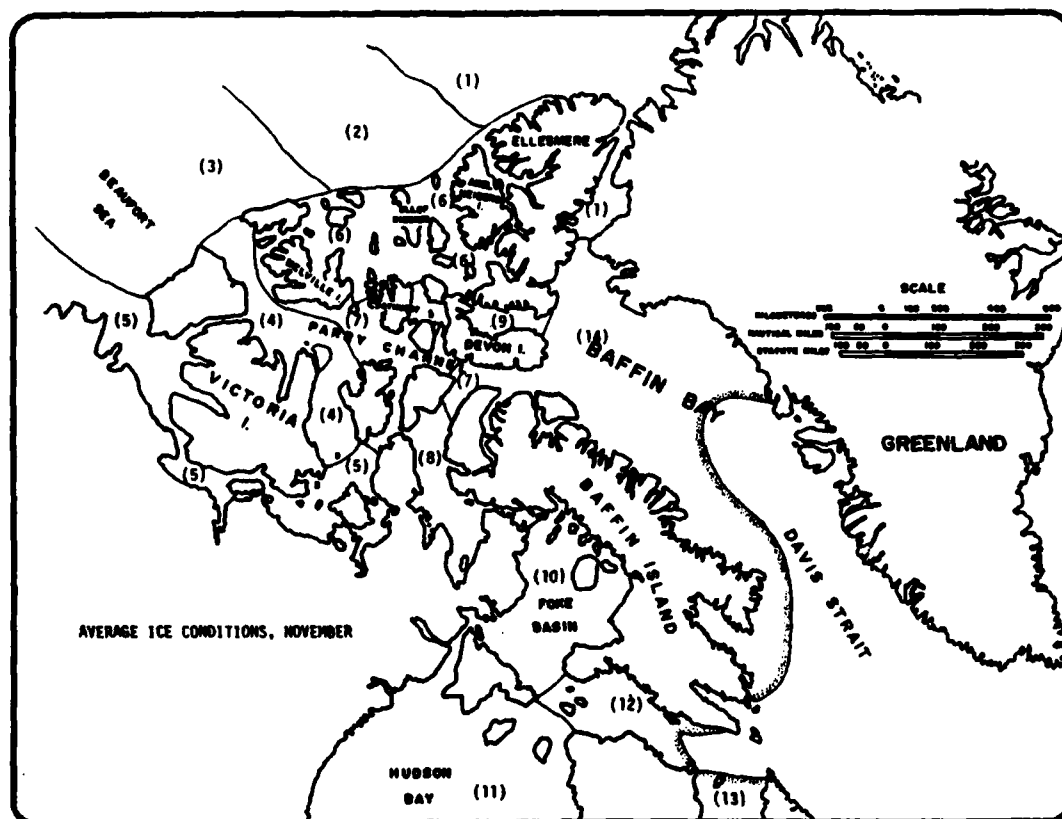


ICE AREA	ICE CHARACTERISTICS
1	PY 2.7-60; NY 15-100; ice islands
2	PY 2.7-60; NY 15-110; ice islands
3	PY 2.4-40; NY 15-60; ice islands
4	PY 2.2-40; NY 12-60
5	PY 1.9-30; NY 12-40
6	PY 2.7-25; NY 12-40
7	PY 2.1-30; NY 10-40
8	PY 2.2-40
9	PY 2.4-25
10	PY 1.7-20; NY 15-40
11	PY 1.2-15
12	PY 1.4-18; icebergs
13	PY 1.0-12; icebergs
14	SI 0.9-1.2; icebergs

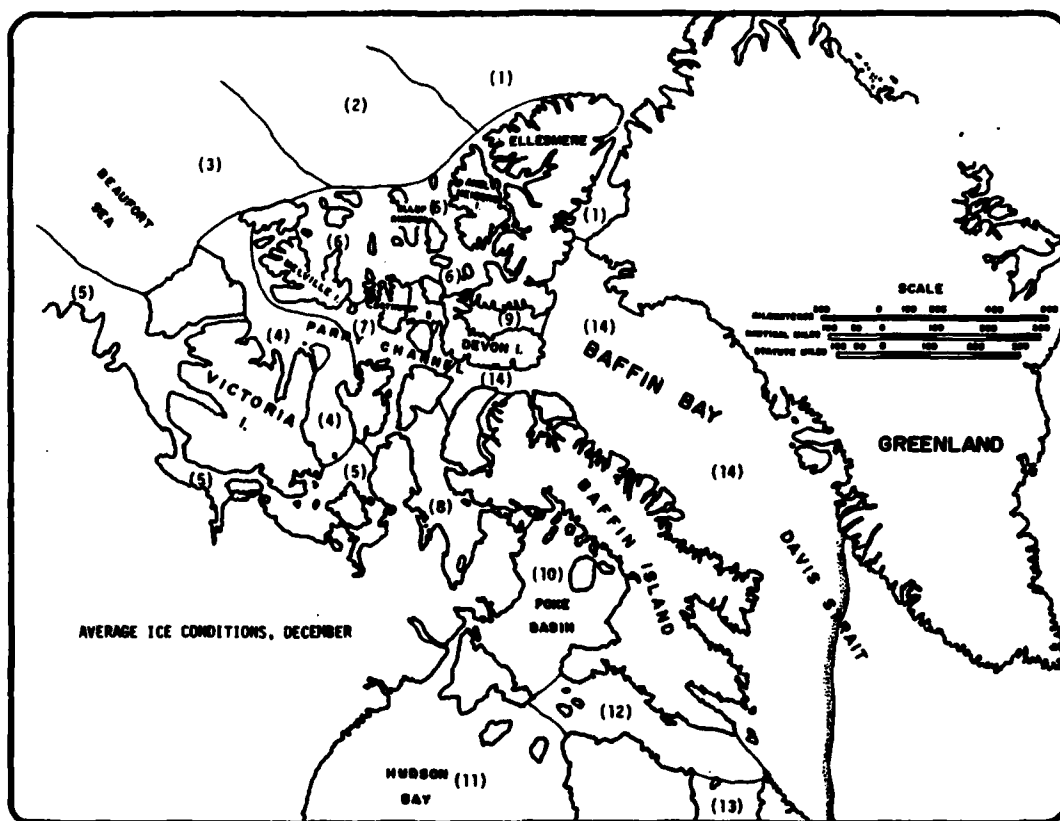

ICE AREA	ICE CHARACTERISTICS
1	PV 3.4-60; NW 15-100; ice islands
2	PV 3.5-60; NW 15-110; ice islands
3	PV 3.1-40; NW 15-60; ice islands
4	PV 3.0-40; NW 12-60;
5	PV 2.8-40; NW 12-40
6	PV 3.8-25; NW 12-40
7	PV 3.0-30; NW 10-40
8	PV 3.2-40
9	PV 3.3-25
10	PV 2.6-30; NW 15-40
11	PV 2.1-20
12	PV 2.5-25; icebergs
13	PV 2.0-25; icebergs
14	SI 3.9-2.0; icebergs


APPENDIX A.3

ANTARCTIC - MAXIMUM AND AVERAGE ICE CONDITIONS BY MONTH

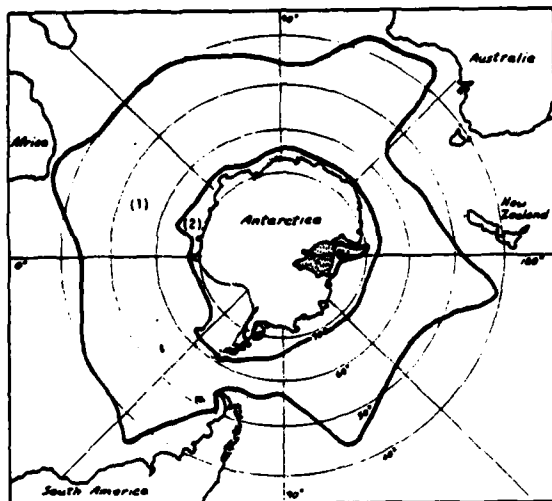


MAXIMUM ICE CONDITIONS, JANUARY

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 6 FT

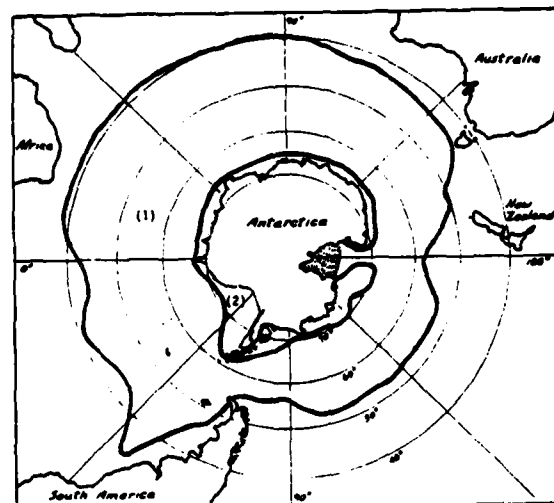


MAXIMUM ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 3 FT

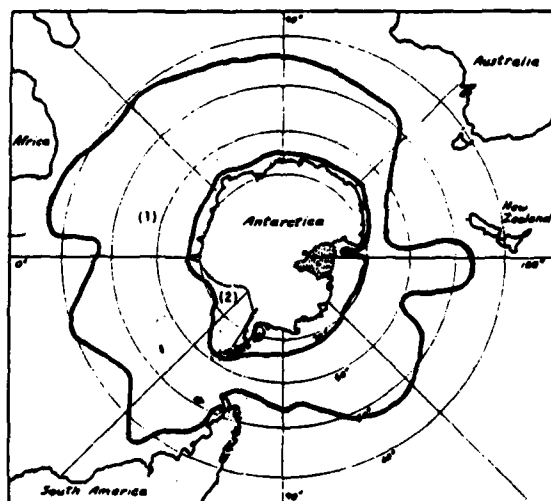


MAXIMUM ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 3.5 FT

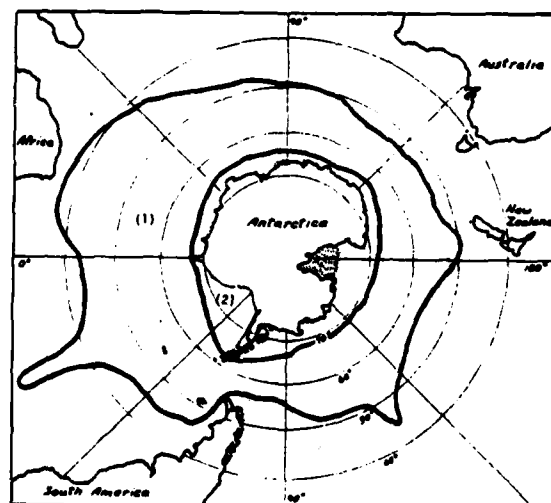


MAXIMUM ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 3.5 FT

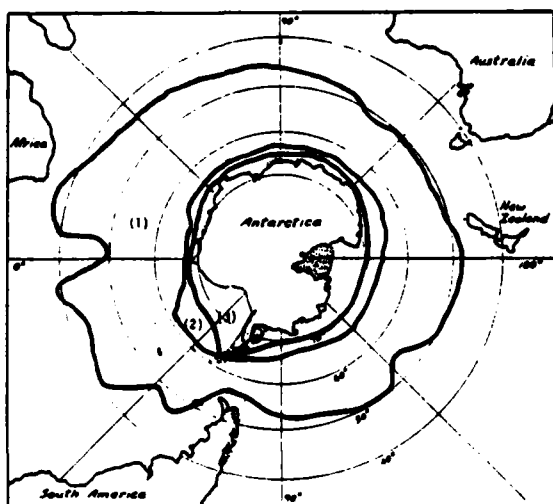


MAXIMUM ICE CONDITIONS, MAY

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 1 FT
3	IB, 4 FT

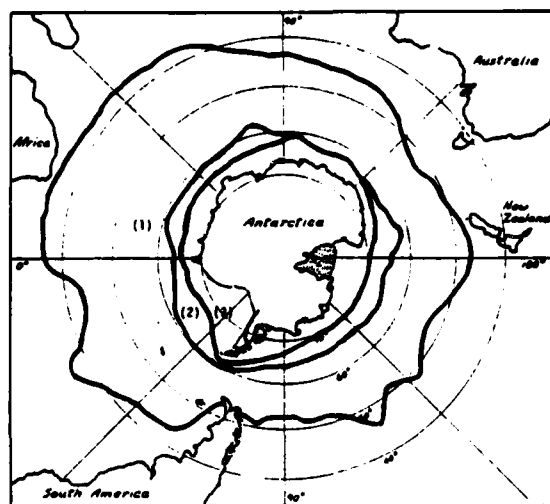


MAXIMUM ICE CONDITIONS, JUNE

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 2 FT
3	IB, 5 FT

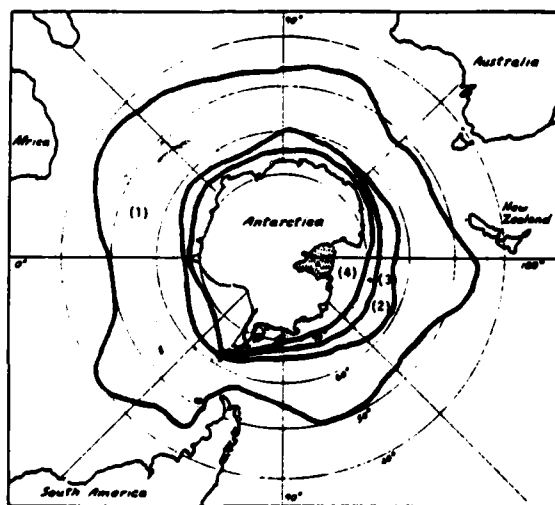


MAXIMUM ICE CONDITIONS, JULY

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 1 FT
3	IB, 3 FT
4	IB, 5 FT

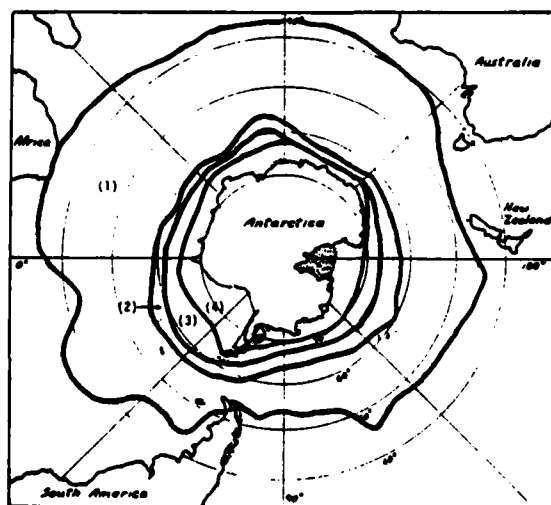


MAXIMUM ICE CONDITIONS, AUGUST

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 2 FT
3	IB, 4 FT
4	IB, 6 FT

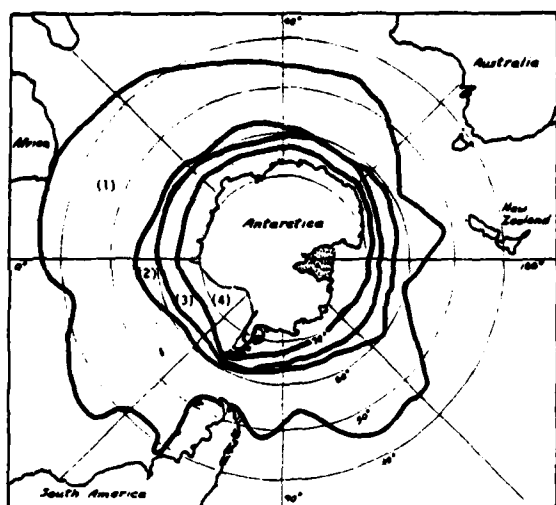


MAXIMUM ICE CONDITIONS, SEPTEMBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 2 FT
3	10, 4 FT
4	10, 6 FT

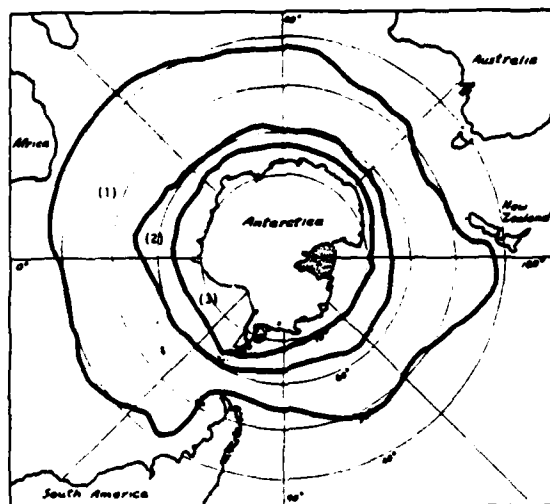


MAXIMUM ICE CONDITIONS, OCTOBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 3 FT
3	10, 6 FT

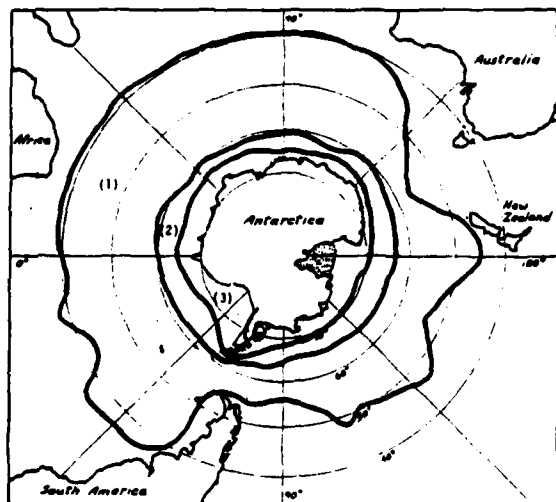


MAXIMUM ICE CONDITIONS, NOVEMBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 3 FT
3	10, 6 FT

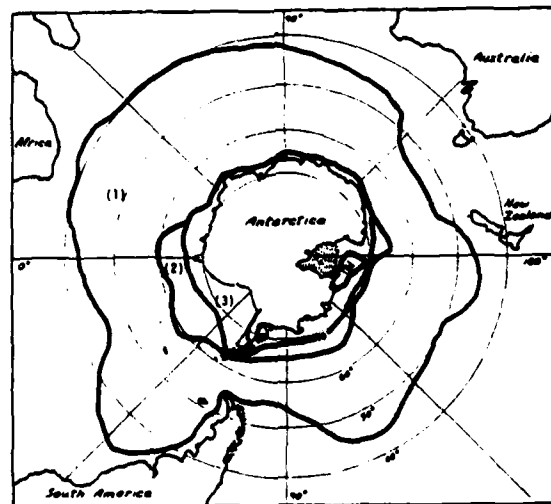


MAXIMUM ICE CONDITIONS, DECEMBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 3 FT
3	10, 6 FT

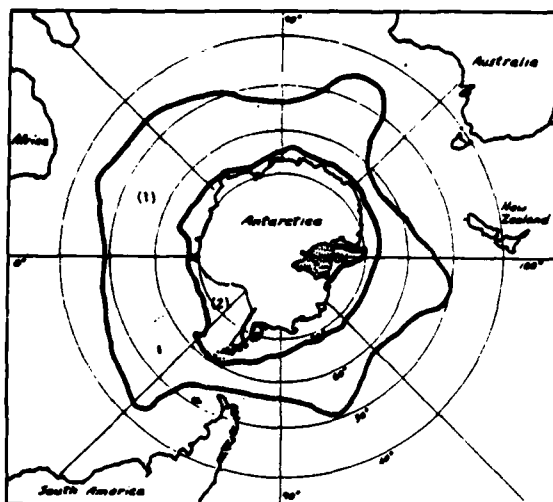


AVERAGE ICE CONDITIONS, JANUARY

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 6 FT

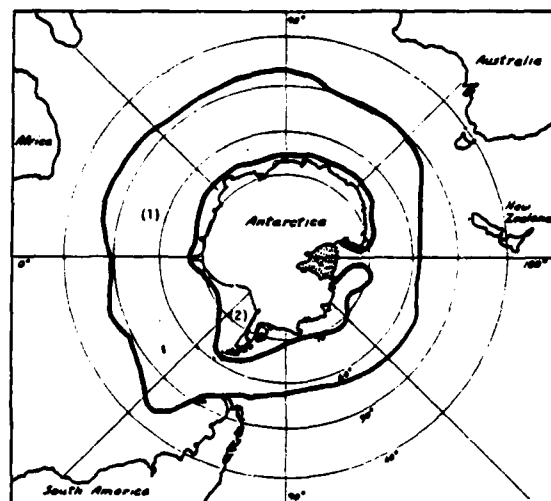


AVERAGE ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	IB, open water
2	IB, 3 FT

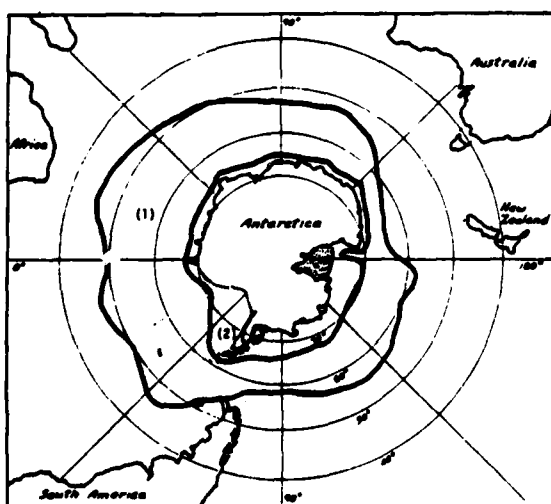


AVERAGE ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 3.5 FT

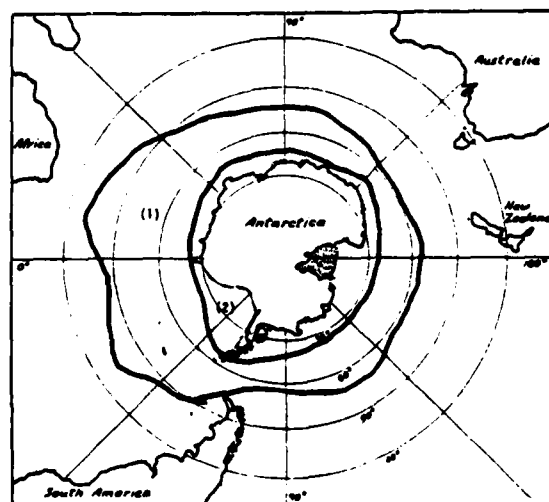


AVERAGE ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 3.5 FT

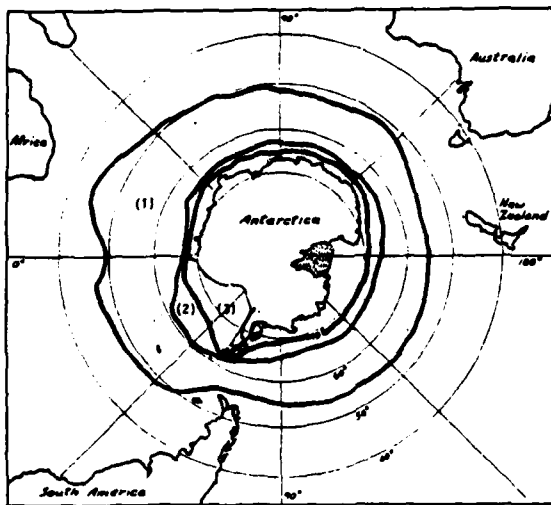


AVERAGE ICE CONDITIONS, MAY

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 1 FT
3	IB, 4 FT

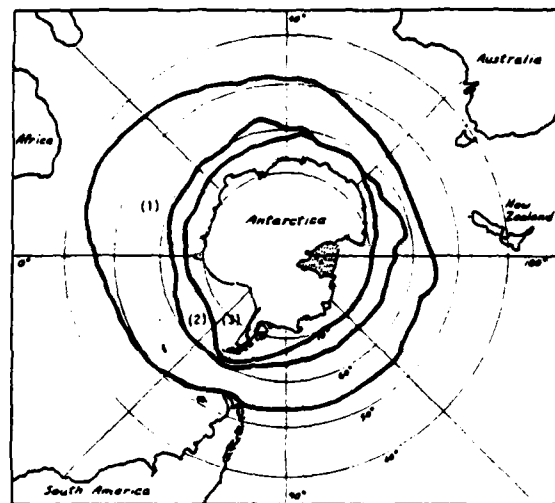


AVERAGE ICE CONDITIONS, JUNE

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 2 FT
3	IB, 5 FT

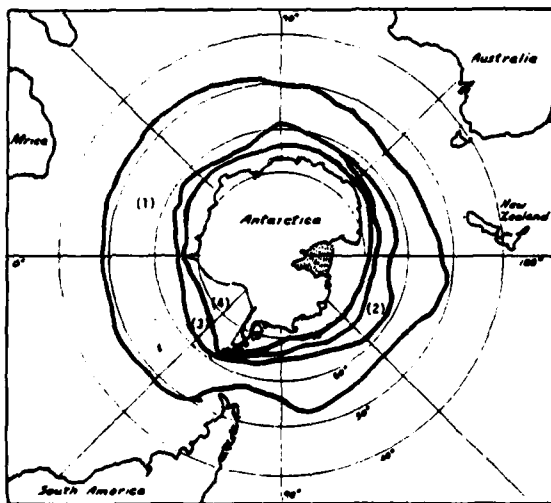


AVERAGE ICE CONDITIONS, JULY

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 1 FT
3	IB, 3 FT
4	IB, 5 FT

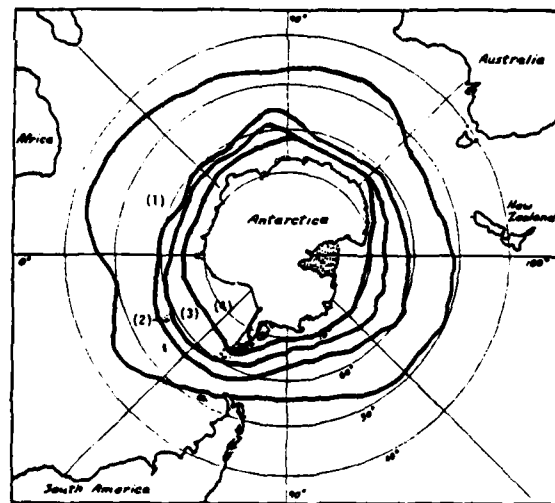


AVERAGE ICE CONDITIONS, AUGUST

ICE AREA	ICE CHARACTERISTICS
1	IB, OPEN WATER
2	IB, 2 FT
3	IB, 4 FT
4	IB, 6 FT

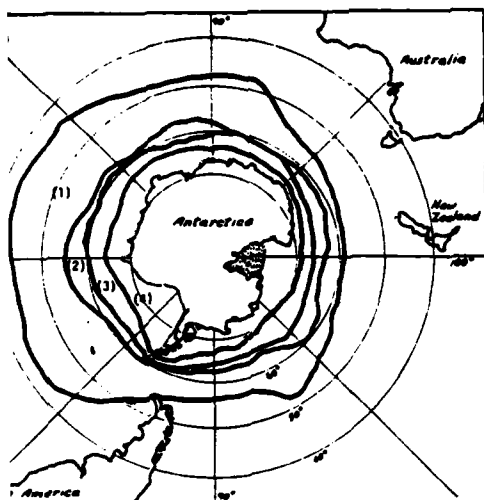


AVERAGE ICE CONDITIONS, SEPTEMBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 2 FT
3	10, 4 FT
4	10, 6 FT

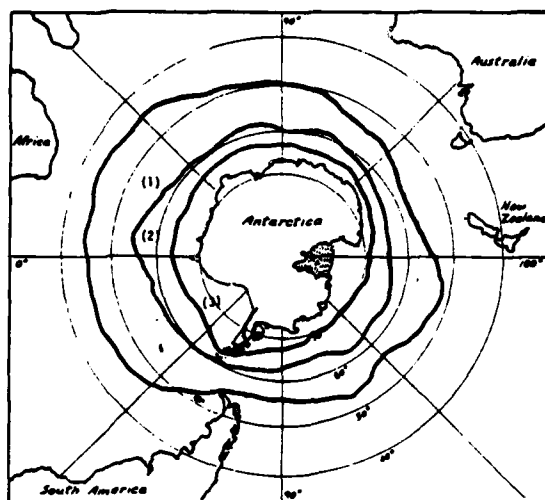


AVERAGE ICE CONDITIONS, OCTOBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 3 FT
3	10, 6 FT

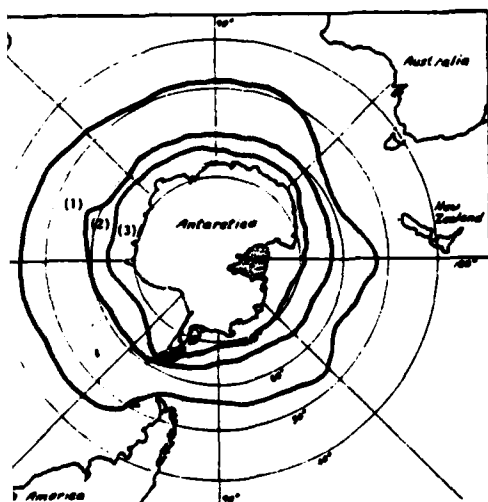

AVERAGE ICE CONDITIONS, NOVEMBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 3 FT
3	10, 6 FT

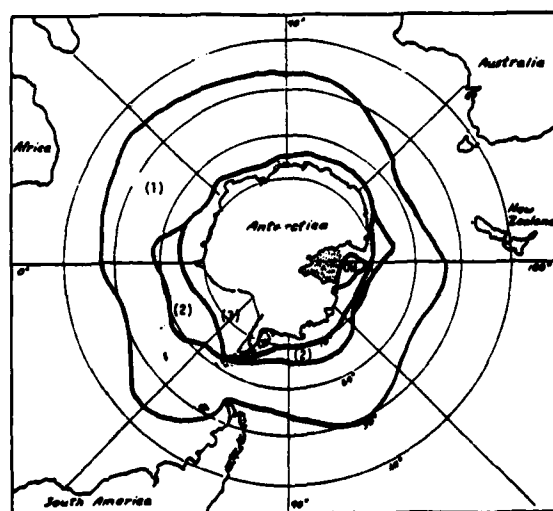


AVERAGE ICE CONDITIONS, DECEMBER

ICE AREA	ICE CHARACTERISTICS
1	10, OPEN WATER
2	10, 3 FT
3	10, 6 FT


APPENDIX A.4

GREAT LAKES - MAXIMUM AND AVERAGE ICE CONDITIONS BY MONTH


THE GREAT LAKES — ST. LAWRENCE SEAWAY SYSTEM

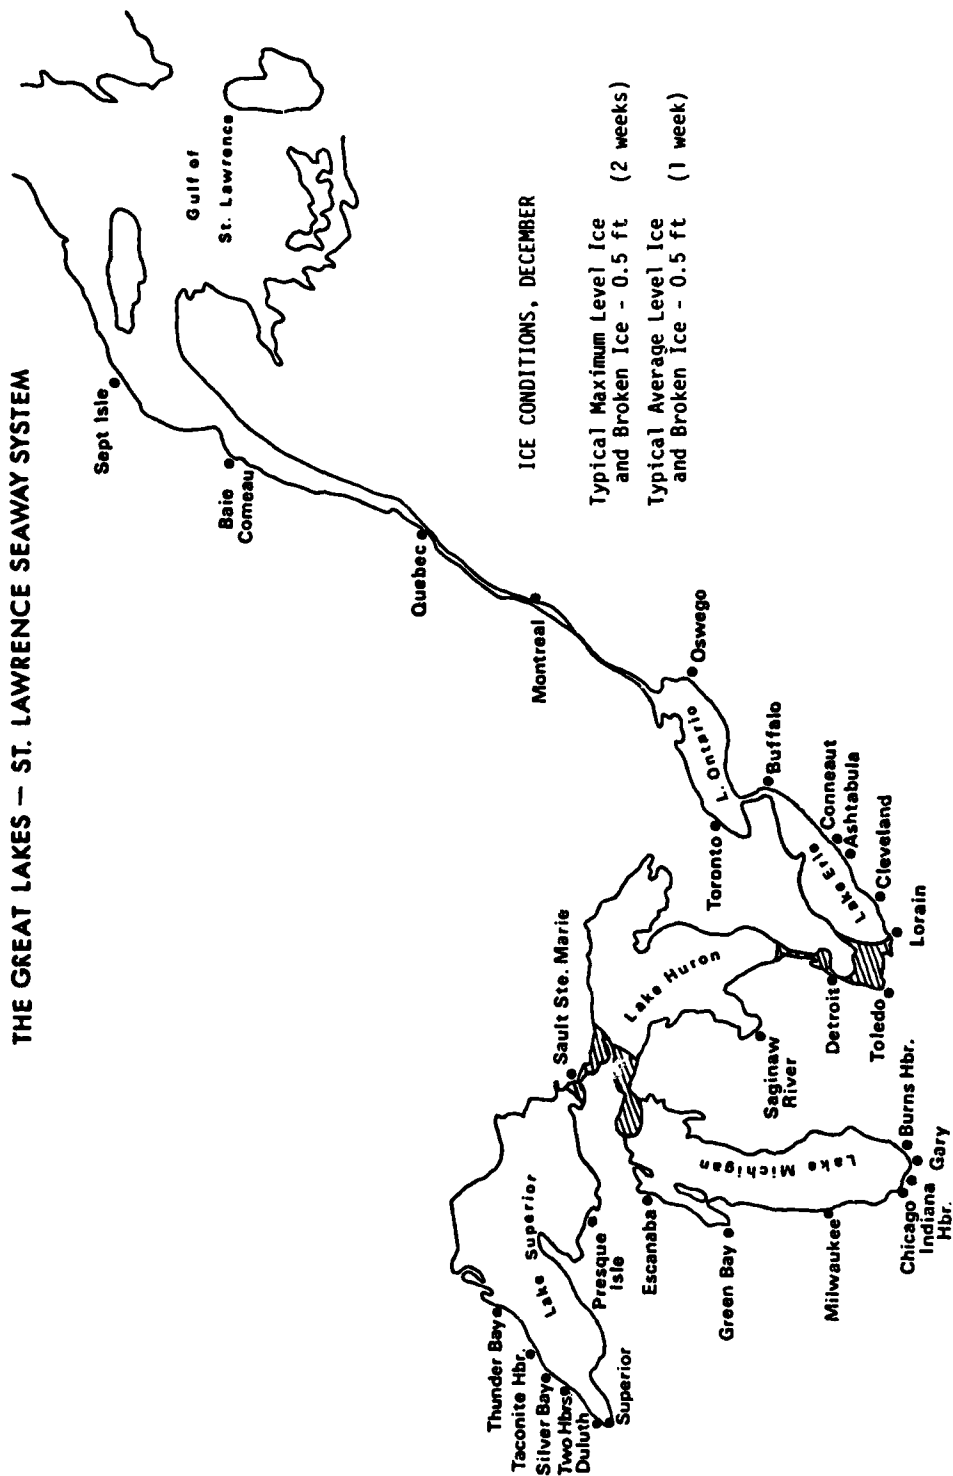


THE GREAT LAKES — ST. LAWRENCE SEAWAY SYSTEM

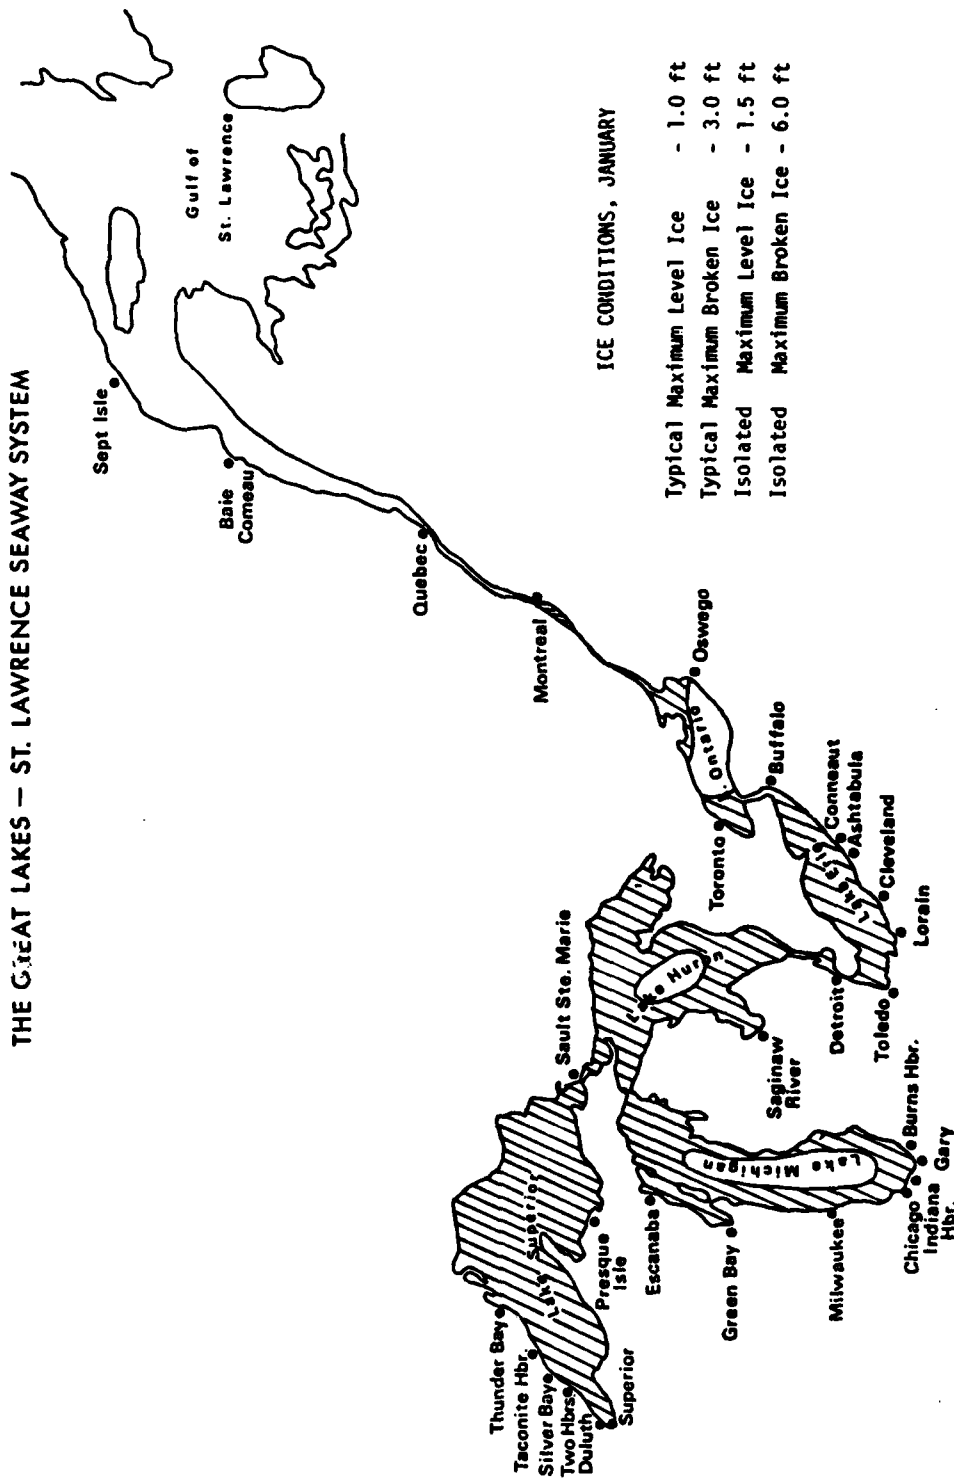


THE GREAT LAKES — ST. LAWRENCE SEAWAY SYSTEM

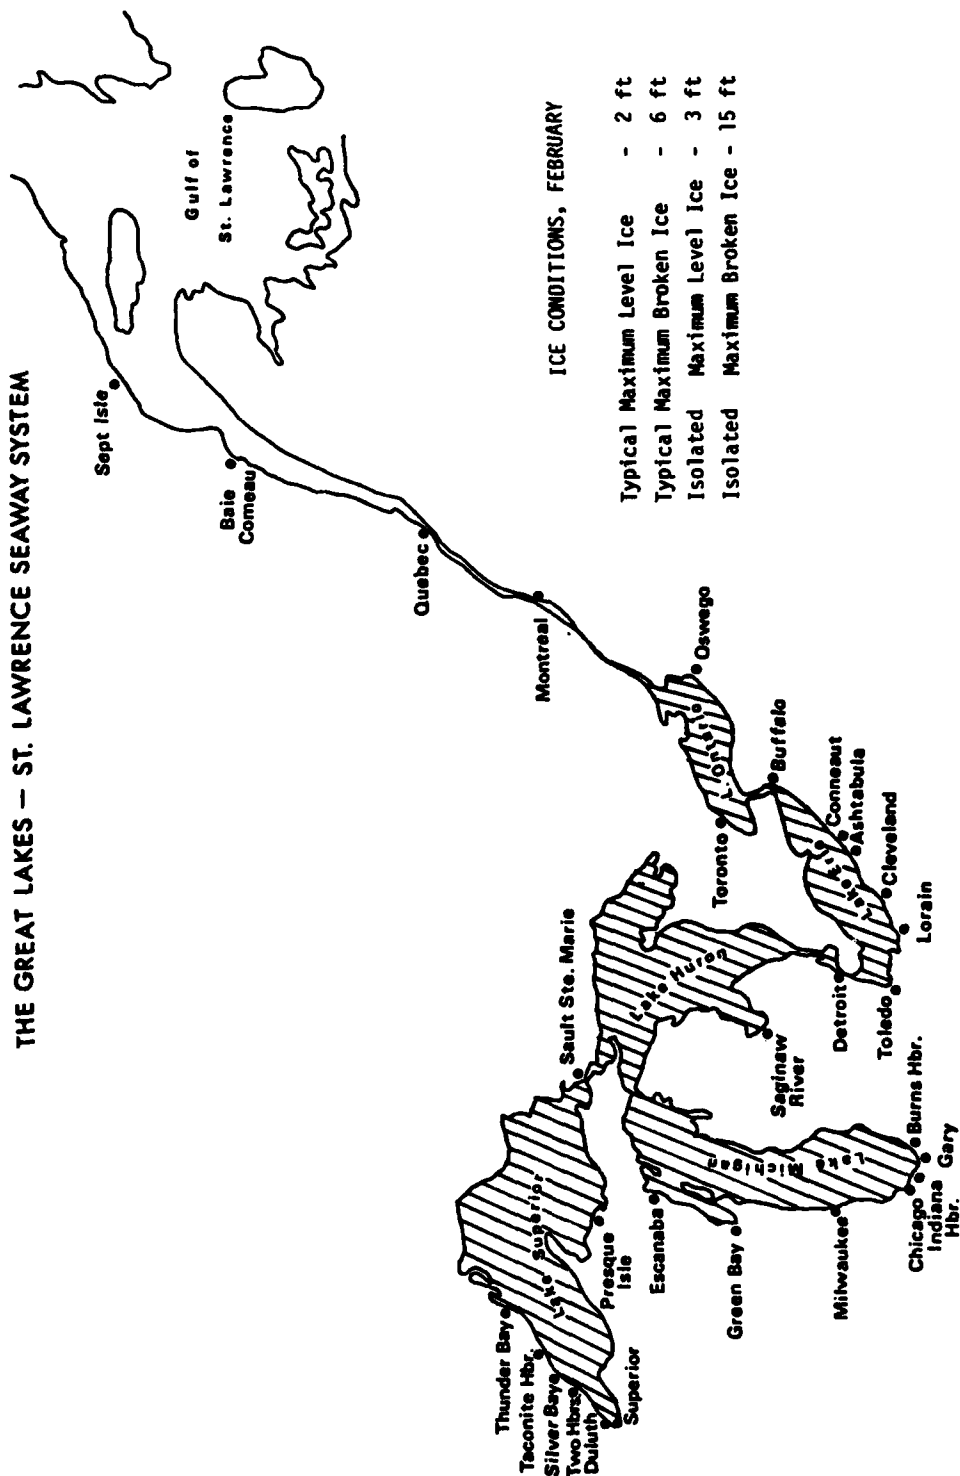

THE GREAT LAKES — ST. LAWRENCE SEAWAY SYSTEM

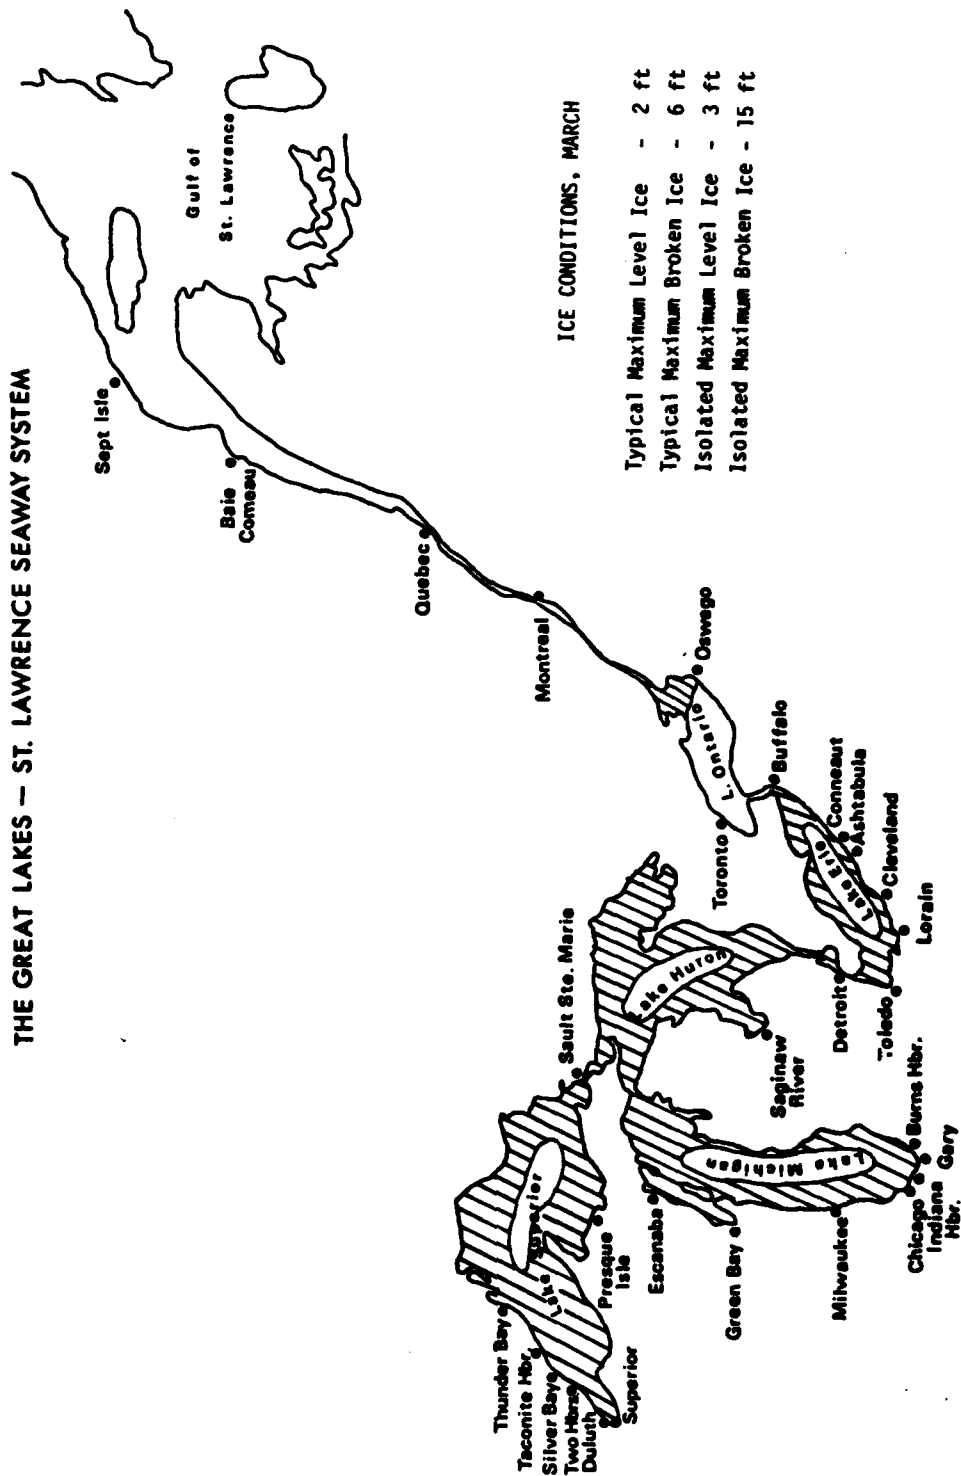

THE GREAT LAKES — ST. LAWRENCE SEAWAY SYSTEM

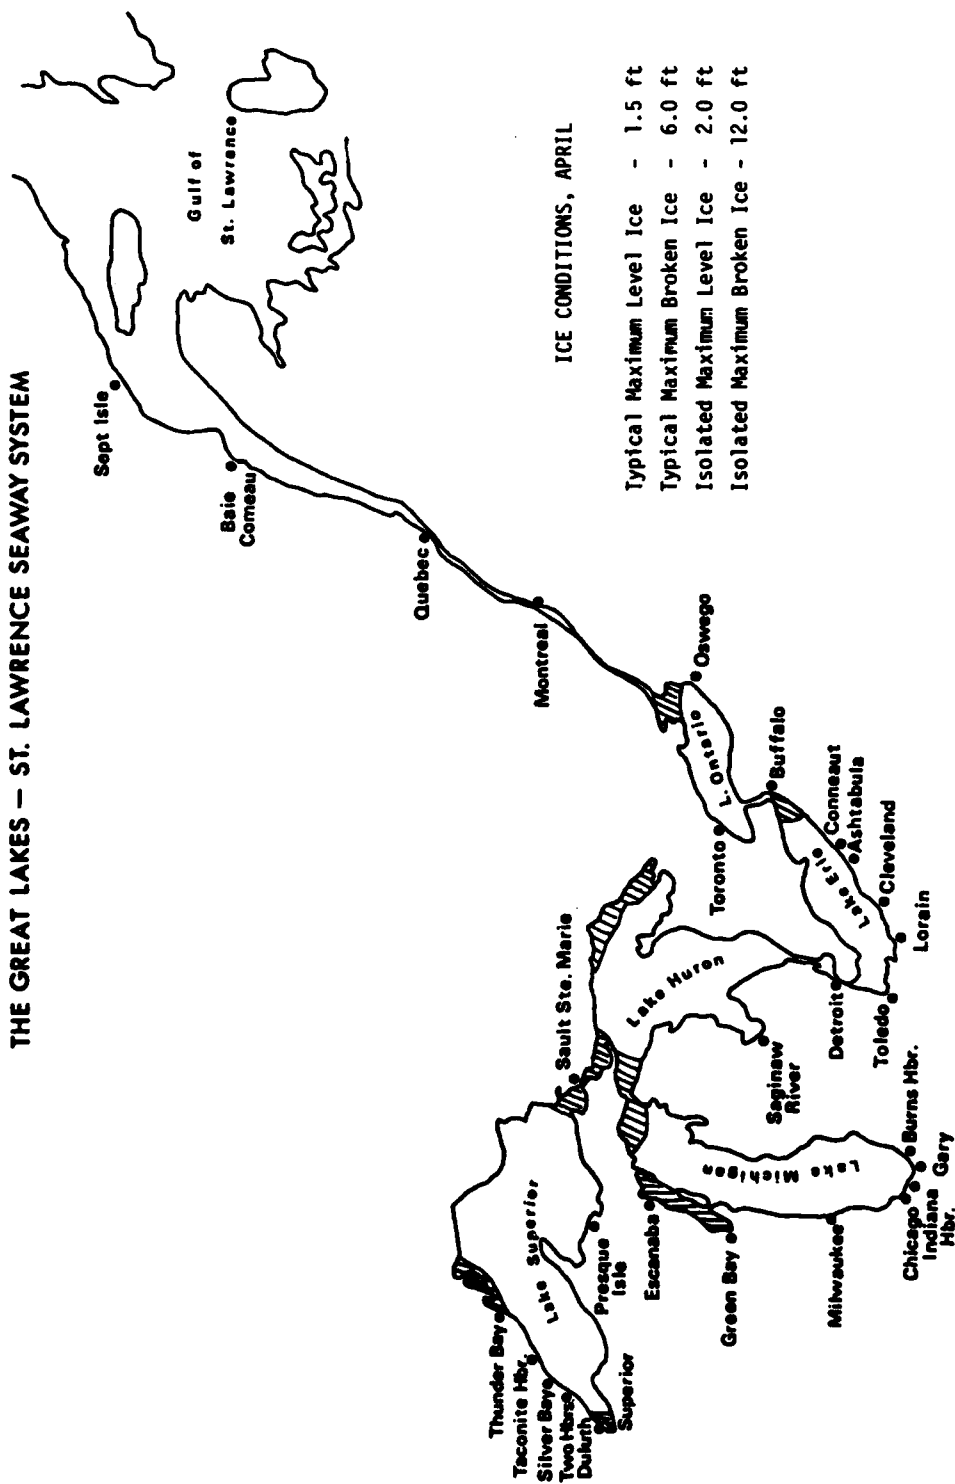


APPENDIX A.5

GULF OF ST. LAWRENCE - MAXIMUM AND AVERAGE ICE CONDITIONS BY MONTH




ICE AREA	ICE CHARACTERISTICS
1	FY 1.25
2	FY 0.6
3	FY 0.4
4	FY 0.2
5	FY 1.0
6	FY 1.25

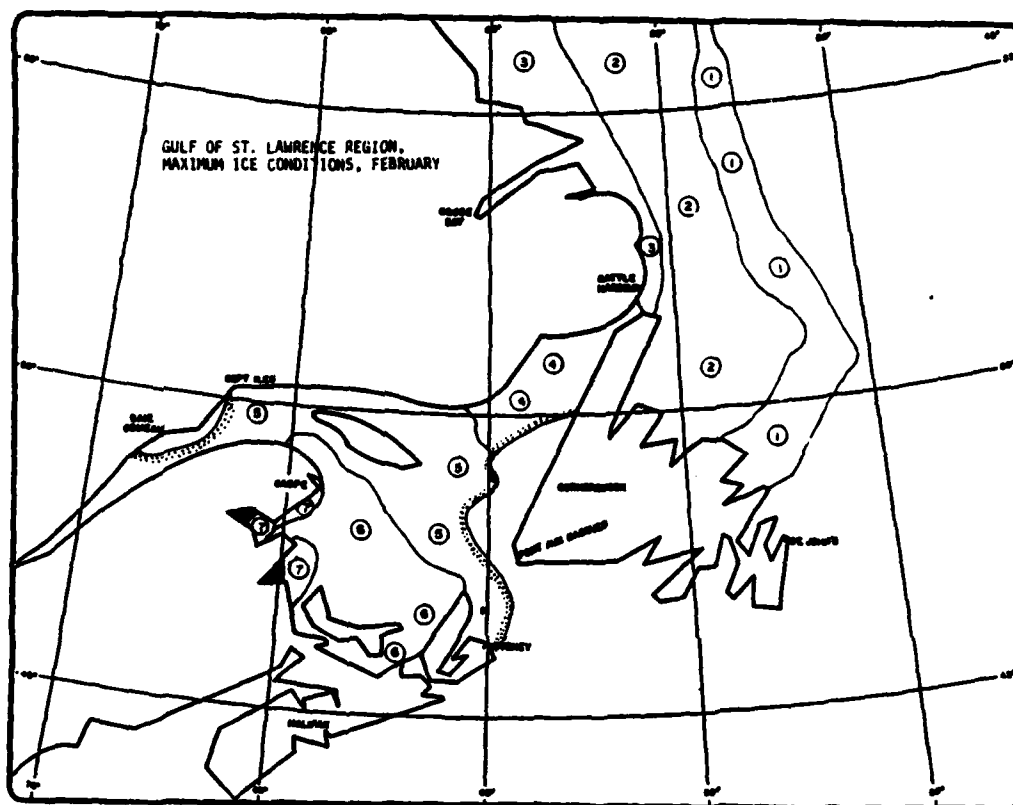

MAXIMUM ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	BI 0.6-2.5
2	FY 3.2
3	FY 1.2
4	FY 0.8
5	FY 1.0
6	FY 2.0
7	FY 2.3

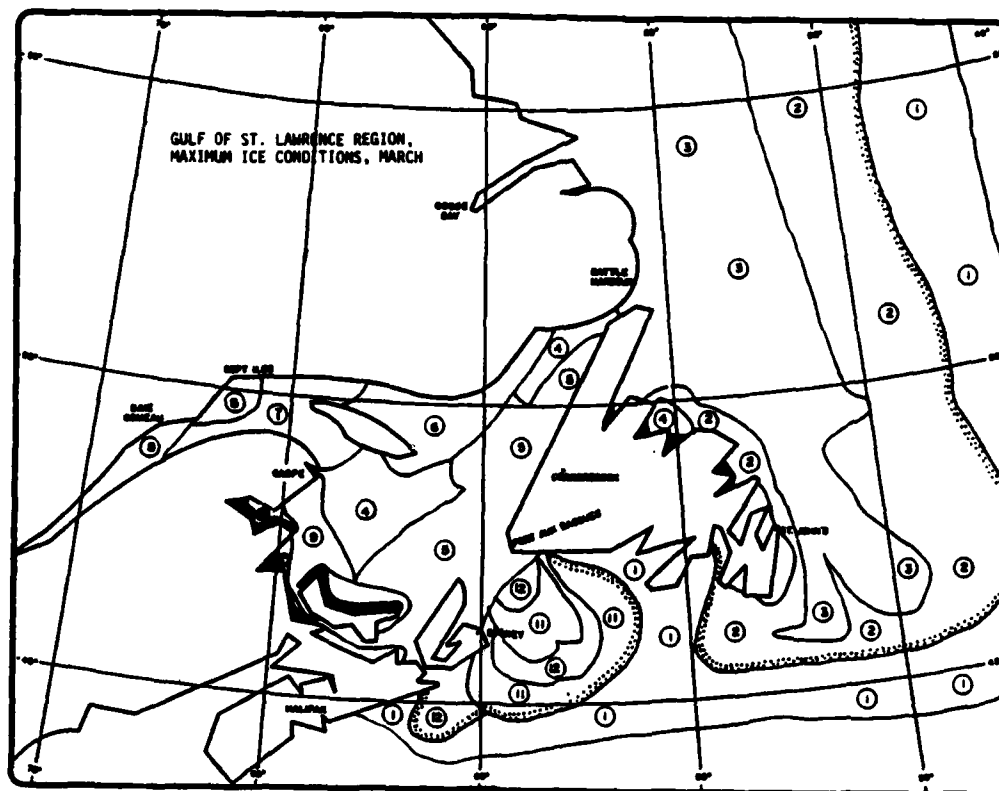


MAXIMUM ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	ICEBERGS
2	SI 0.8-3.0
3	PI 4.0
4	PI 2.5
5	PI 1.8
6	PI 2.8
7	PI 2.0
8	PI 2.2
9	PI 3.0
10	PI 3.2
11	SI 0.8-2.2
12	SI 3.4-2.2




MAXIMUM ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	ICEBERGS
2	BI 0.8-3.3
3	PY 4.2
4	PY 2.8
5	BI 0.7-2.0
6	BI 0.7-1.5
7	PY 1.5
8	PY 2.0
9	BI 0.6-1.8

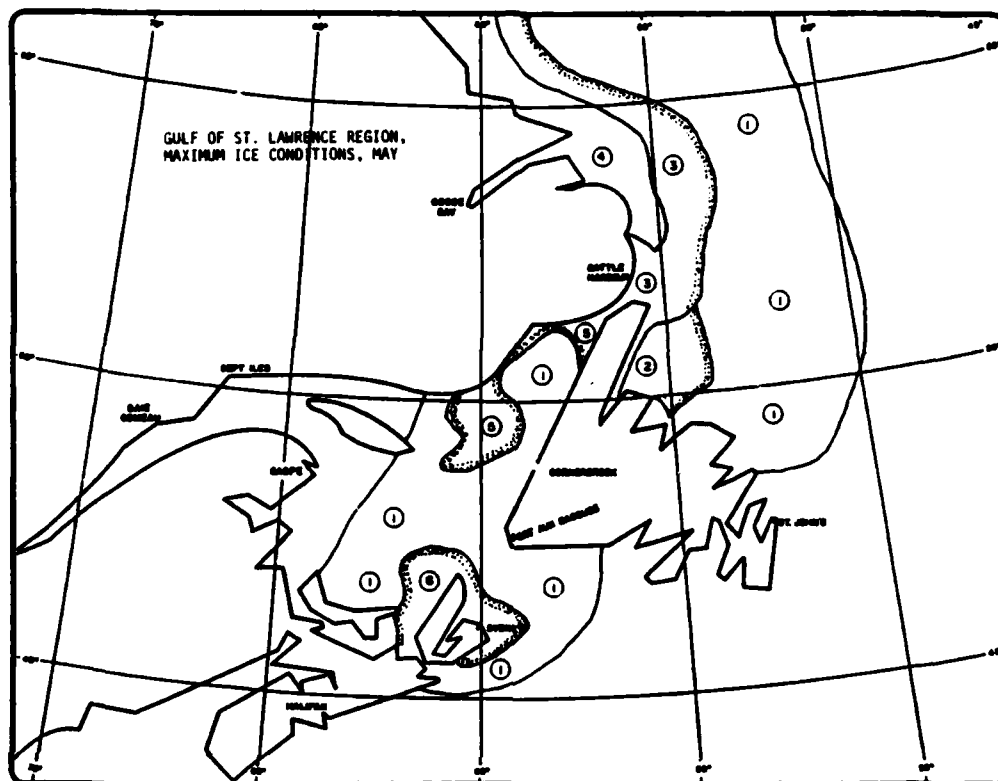


MAXIMUM ICE CONDITIONS, MAY

ICE AREA	ICE CHARACTERISTICS
1	ICEBERGS
2	BI 0.4-2.0
3	FY 2.8, MY 10.0
4	FY 3.3, MY 13.0
5	BI 0.3-1.8
6	BI 0.2-1.5

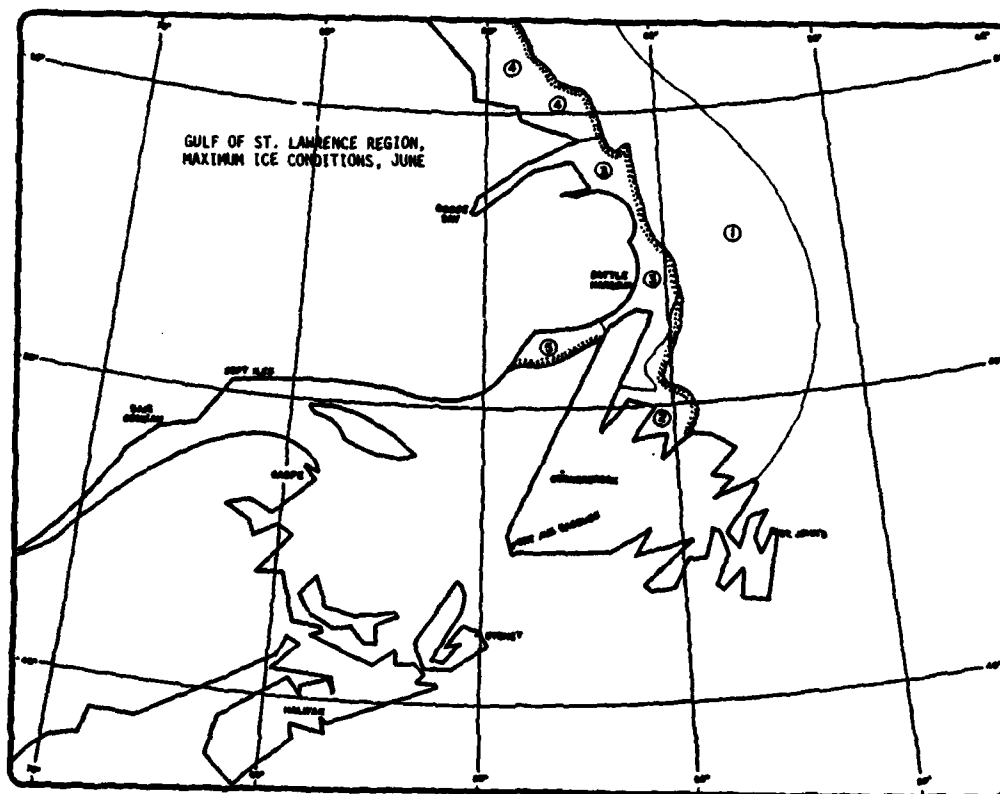


MAXIMUM ICE CONDITIONS, JUNE

ICE AREA	ICE CHARACTERISTICS
1	ICEBERGS
2	SI 0.6-1.2
3	FY 2.0, MY 10.0
4	FY 2.2, MY 12.0
5	SI 0.3-1.0

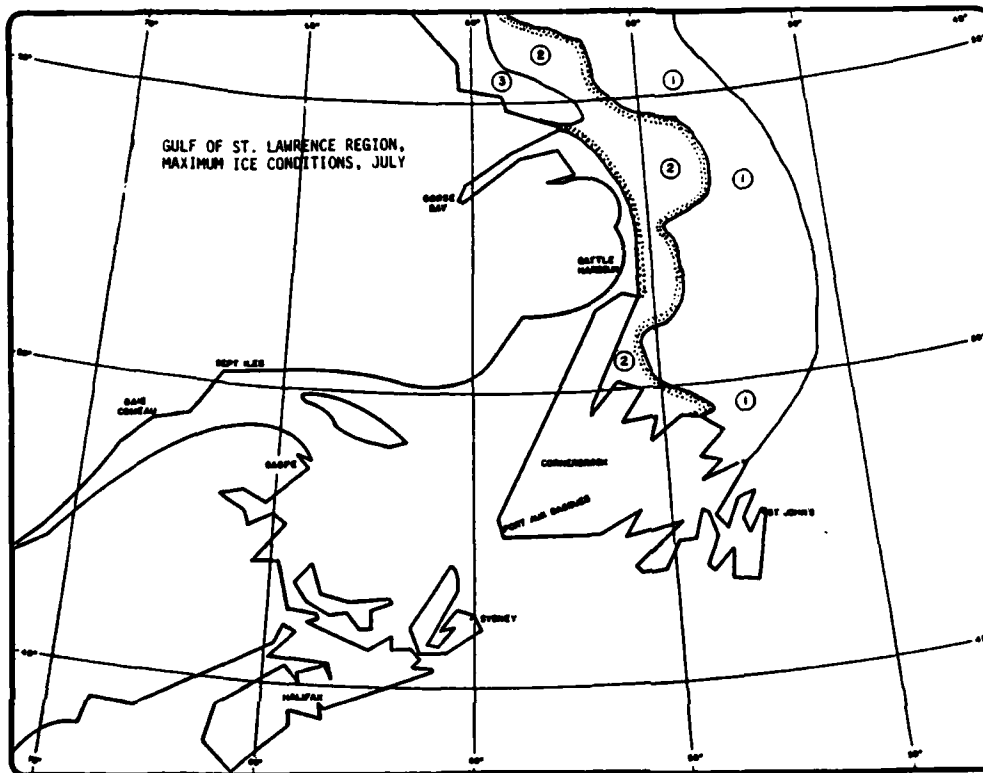


MAXIMUM ICE CONDITIONS, JULY

ICE AREA	ICE CHARACTERISTICS
1	ICEBERGS
2	SI 0.2-1.0
3	FY 1.5, MY 10.0

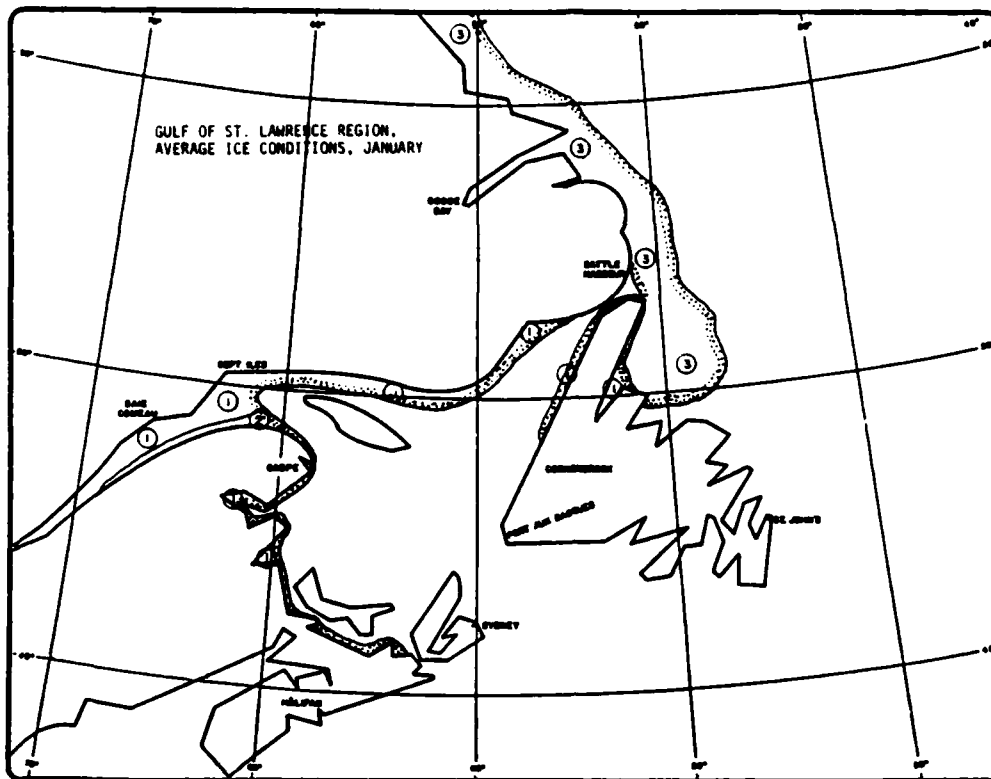


AVERAGE ICE CONDITIONS, JANUARY

ICE AREA	ICE CHARACTERISTICS
1	FY 0.5
2	FY 1.0
3	FY 1.5

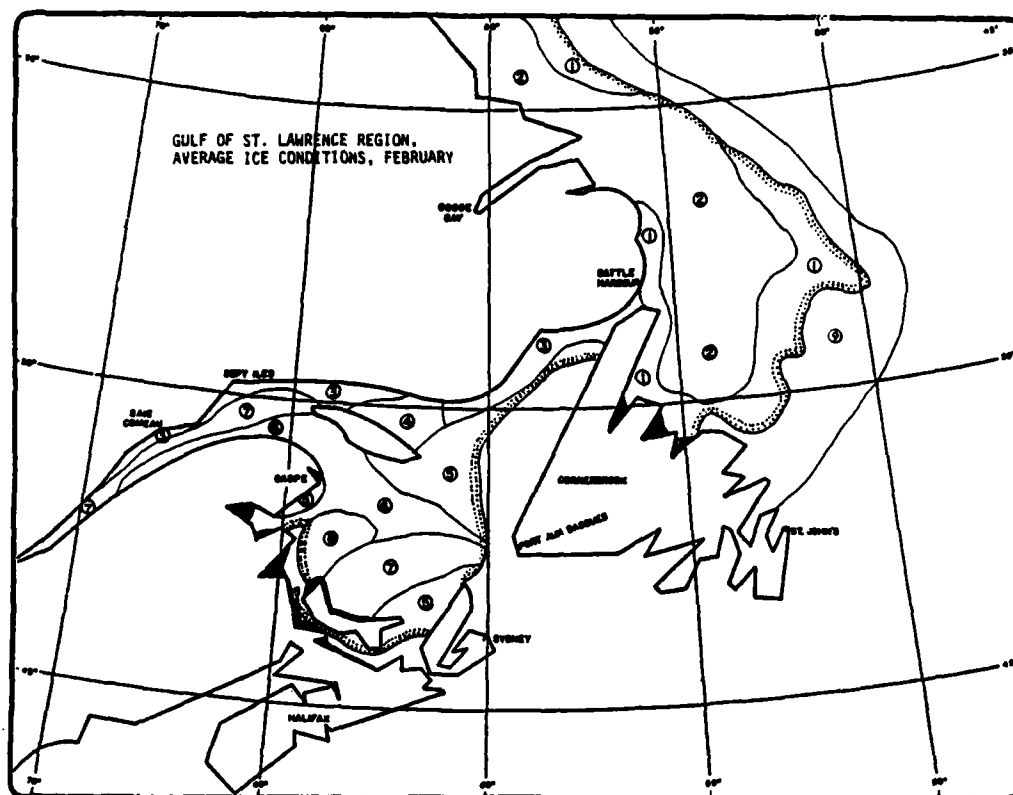


AVERAGE ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	SI 0.5-0.8
2	PY 2.5
3	PY 1.5
4	PY 1.8
5	SI 0.7-0.1
6	PY 1.4
7	PY 1.2
8	PY 1.3
9	ICEBERGS

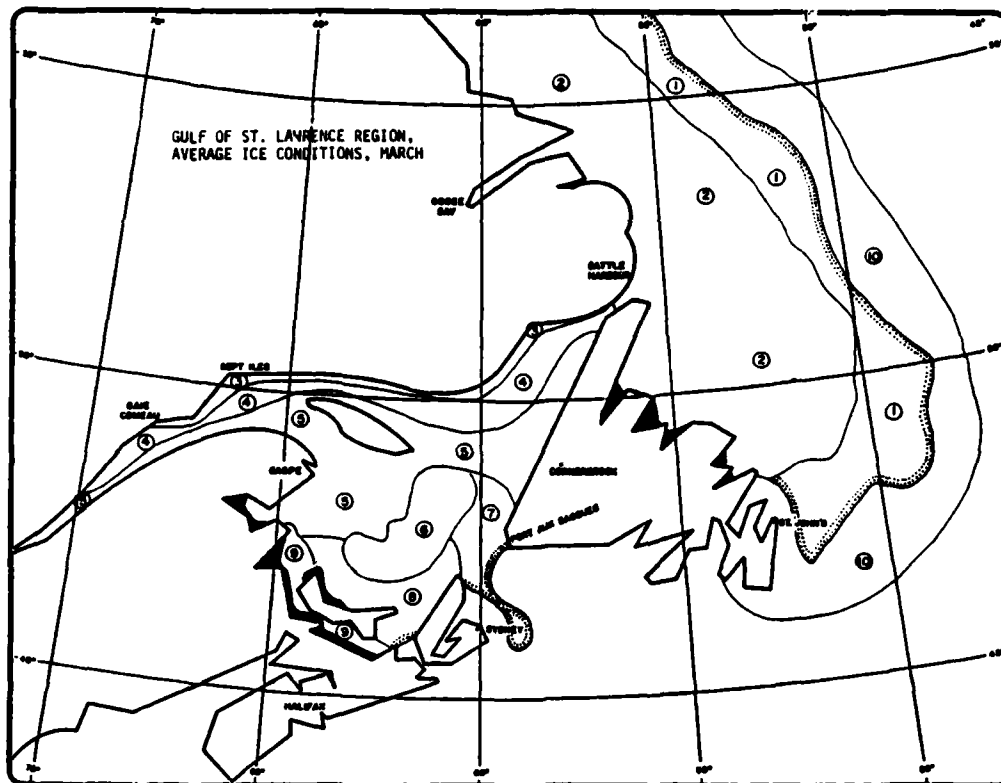


AVERAGE ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	SI 0.6-1.5
2	FY 3.0
3	FY 0.8
4	FY 1.5
5	FY 2.0-12
6	FY 2.2-10
7	FY 1.0
8	FY 1.2
9	FY 1.3
10	ICEBERGS

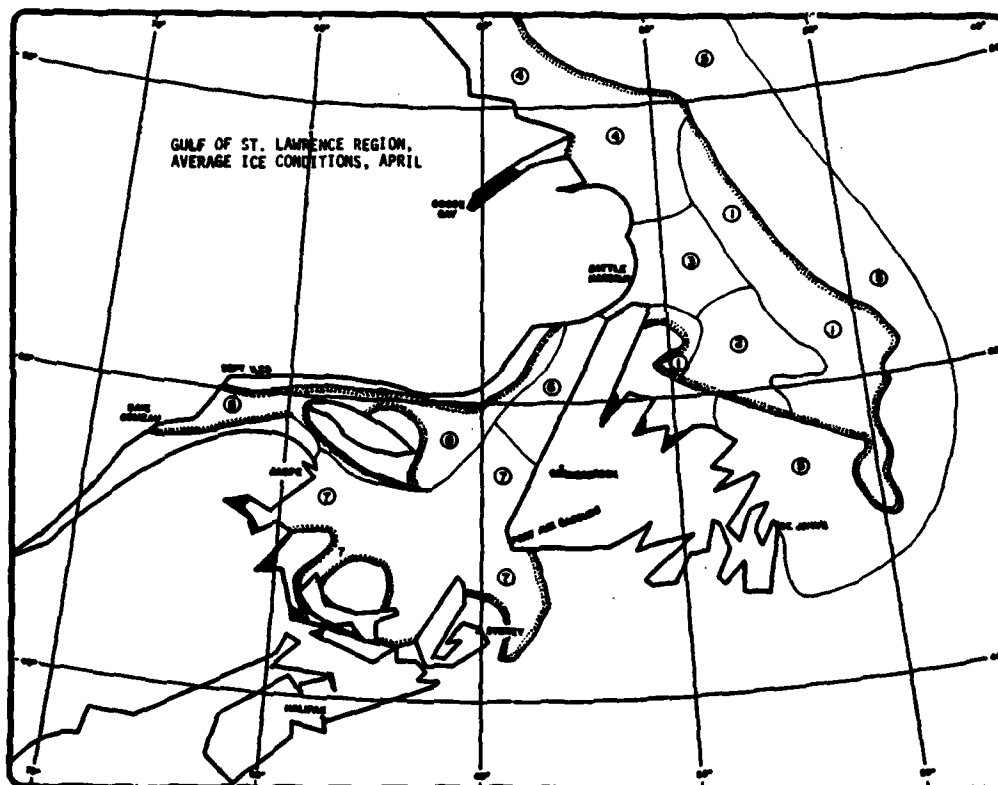


AVERAGE ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	SI 0.3-1.8
2	PV 2.5
3	PV 2.8
4	PV 3.2
5	ICEBERGS
6	PV 1.8
7	SI 0.8-2.0
8	SI 0.6-1.9

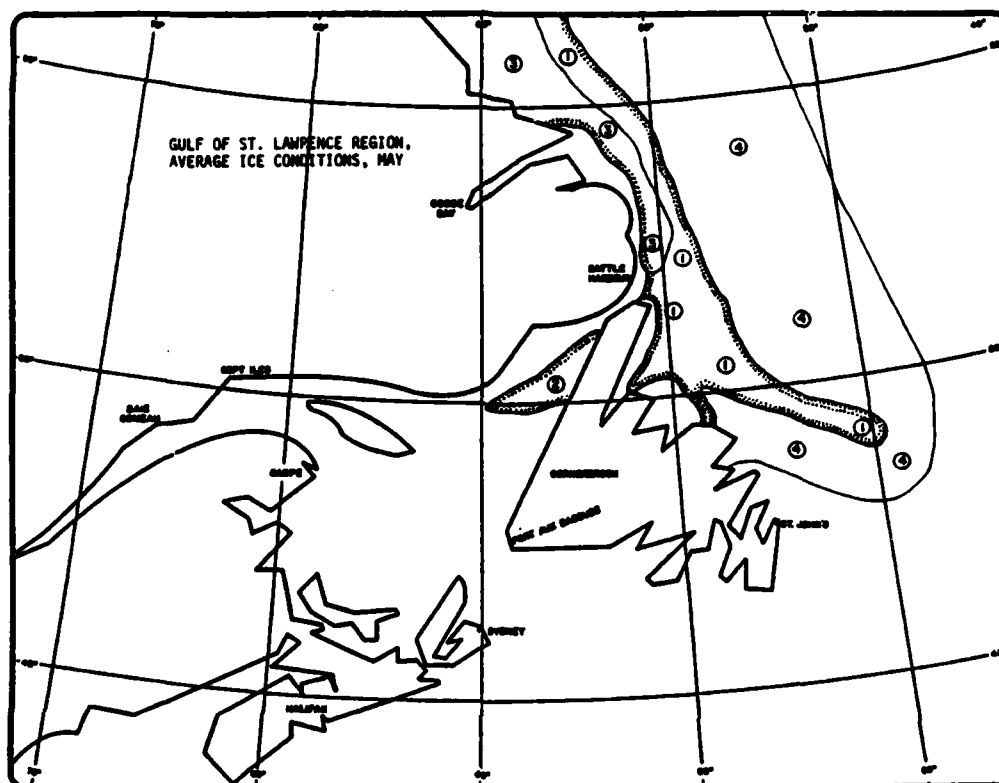

AVERAGE ICE CONDITIONS, MAY

ICE AREA	ICE CHARACTERISTICS
1	BI 0.5-1.0
2	BI 0.3-0.7
3	FY 3.0, HY 12.0
4	ICEBERGS

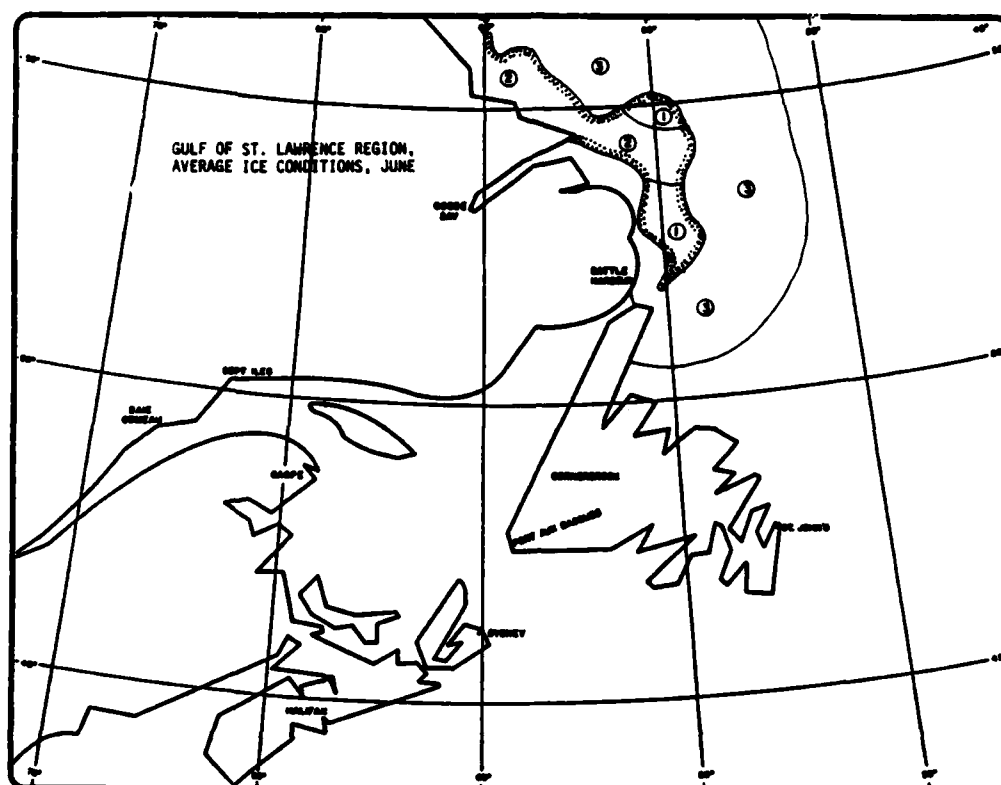


AVERAGE ICE CONDITIONS, JUNE

ICE AREA	ICE CHARACTERISTICS
1	BI 0.3-1.0
2	FY 2.0, MY 6.0
3	ICEBERGS


APPENDIX A.6

BALTIC SEA - MAXIMUM AND AVERAGE ICE CONDITIONS BY MONTH

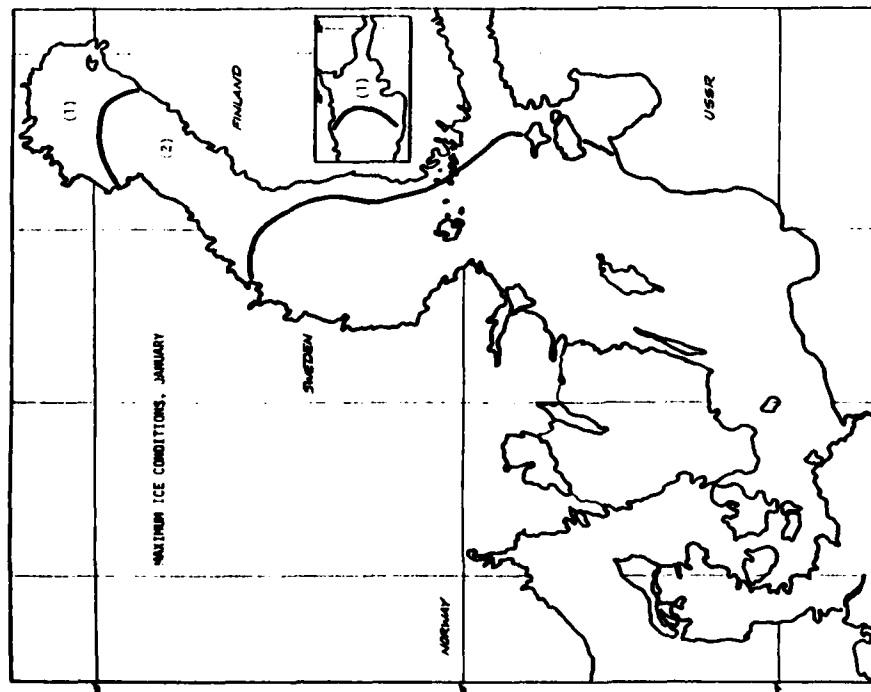


MAXIMUM ICE CONDITIONS, JANUARY

ICE AREA	ICE CHARACTERISTICS
1	FY 2
2	FY 1

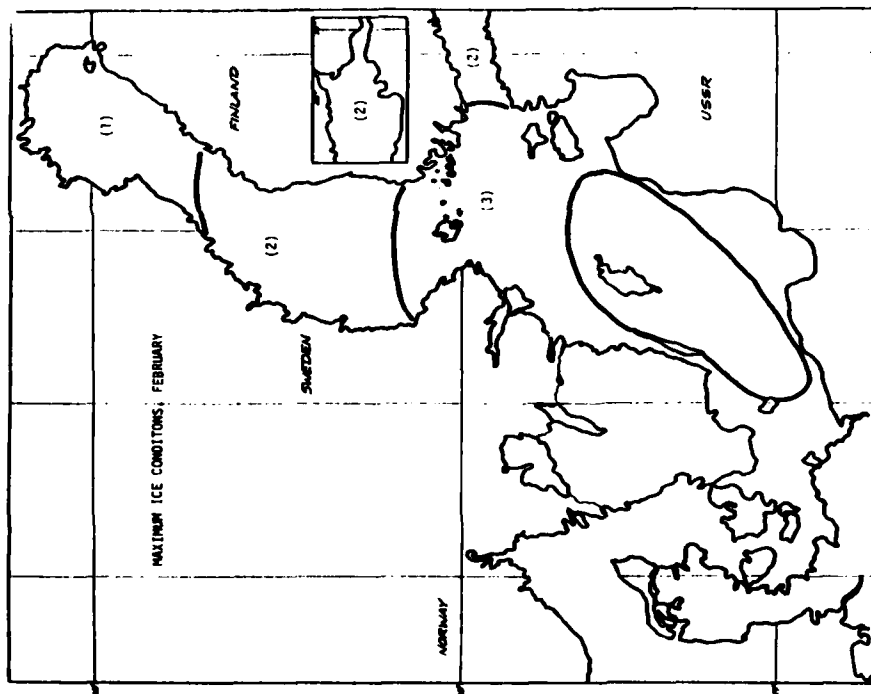


MAXIMUM ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	FY 3
2	FY 2
3	FY 1

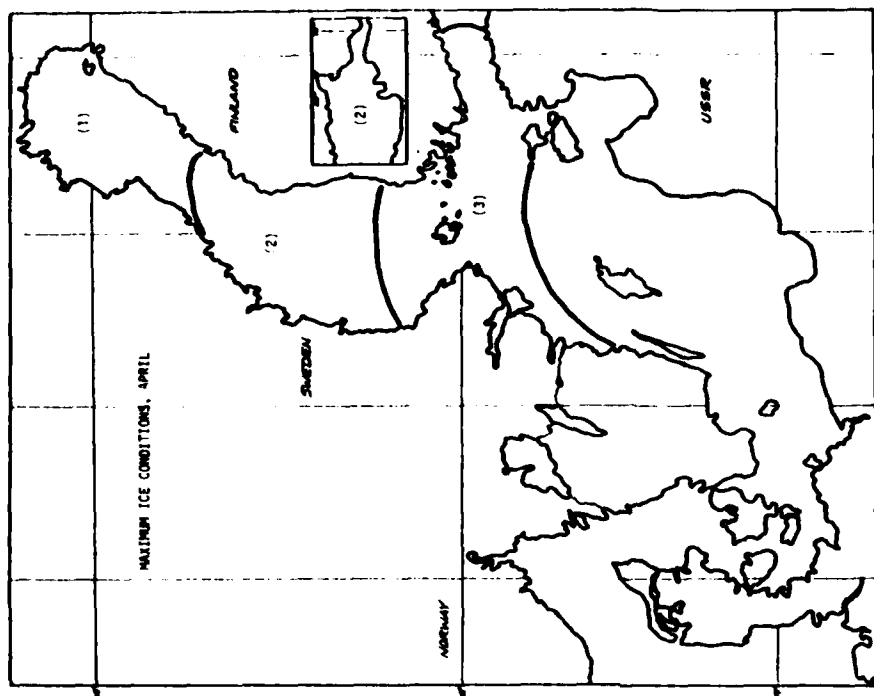


MAXIMUM ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	FY 3
2	FY 2
3	FY 1

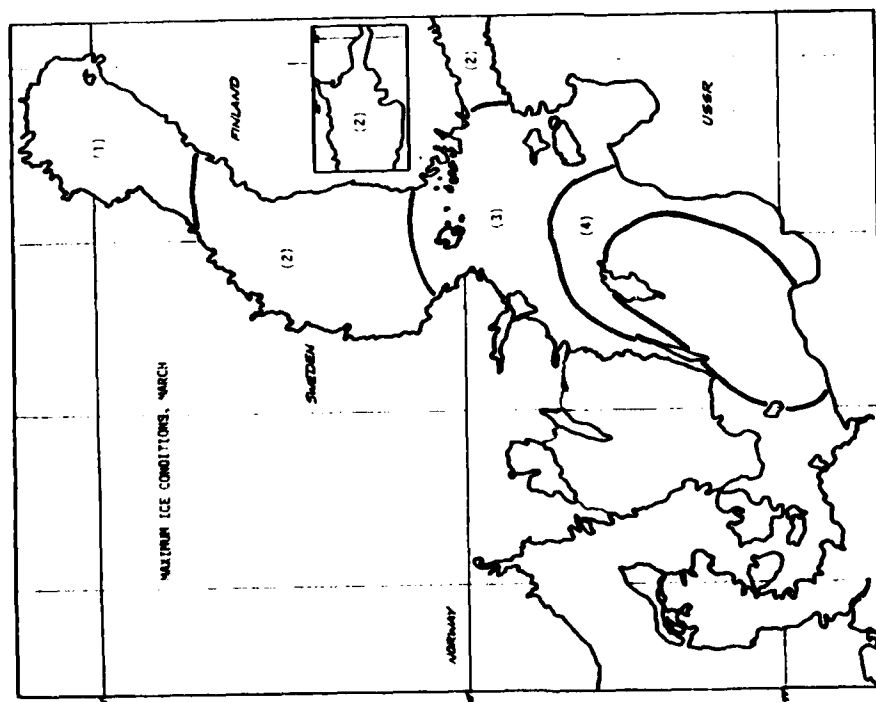


MAXIMUM ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	FY 3
2	FY 2
3	FY 1.5
4	FY 1

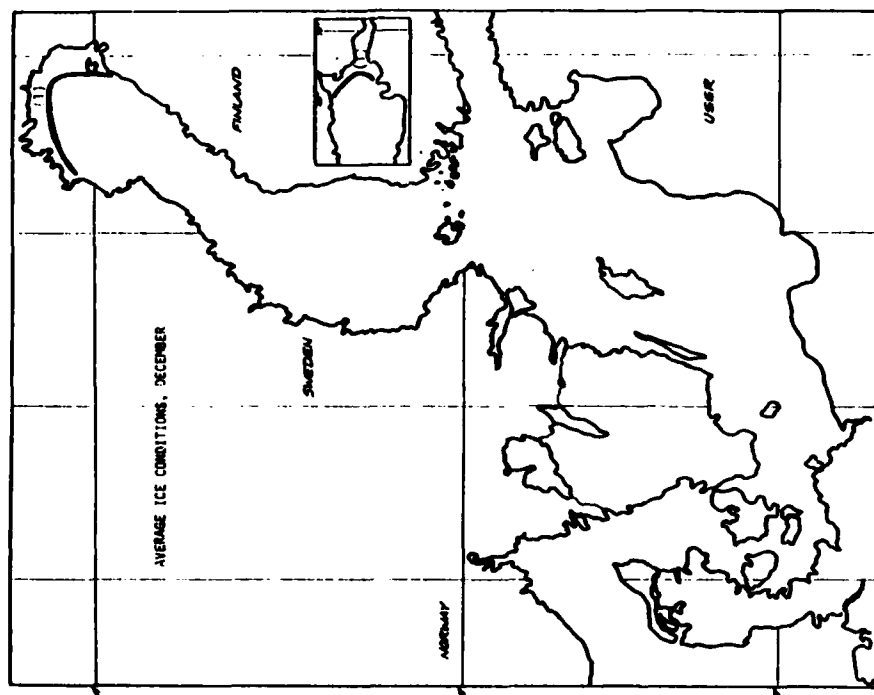


AVERAGE ICE CONDITIONS, DECEMBER

ICE AREA	ICE CHARACTERISTICS
1	FY 1

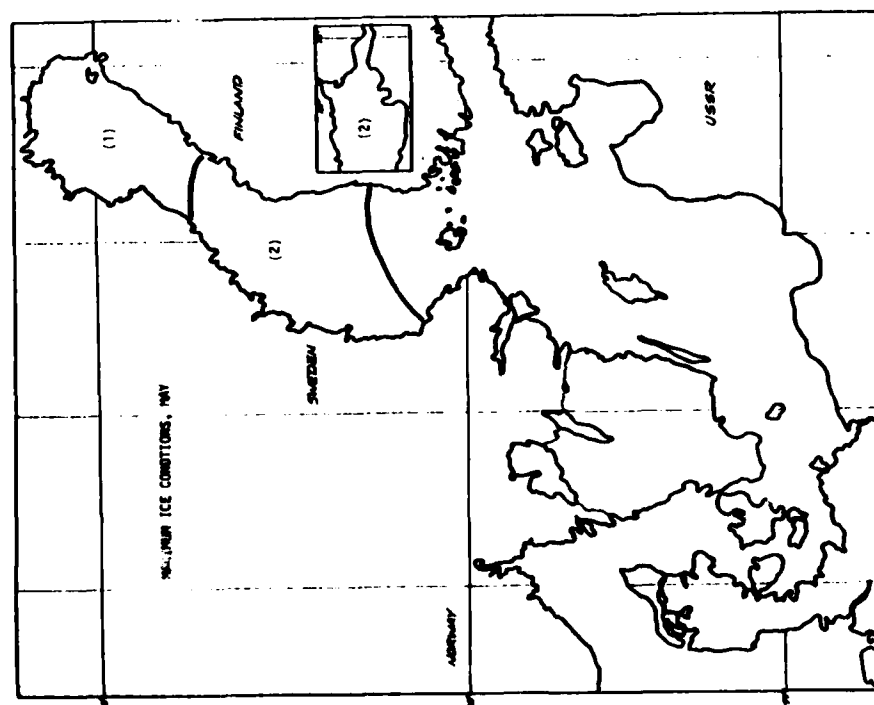


MAXIMUM ICE CONDITIONS, MAY

ICE AREA	ICE CHARACTERISTICS
1	FY 2
2	FY 1

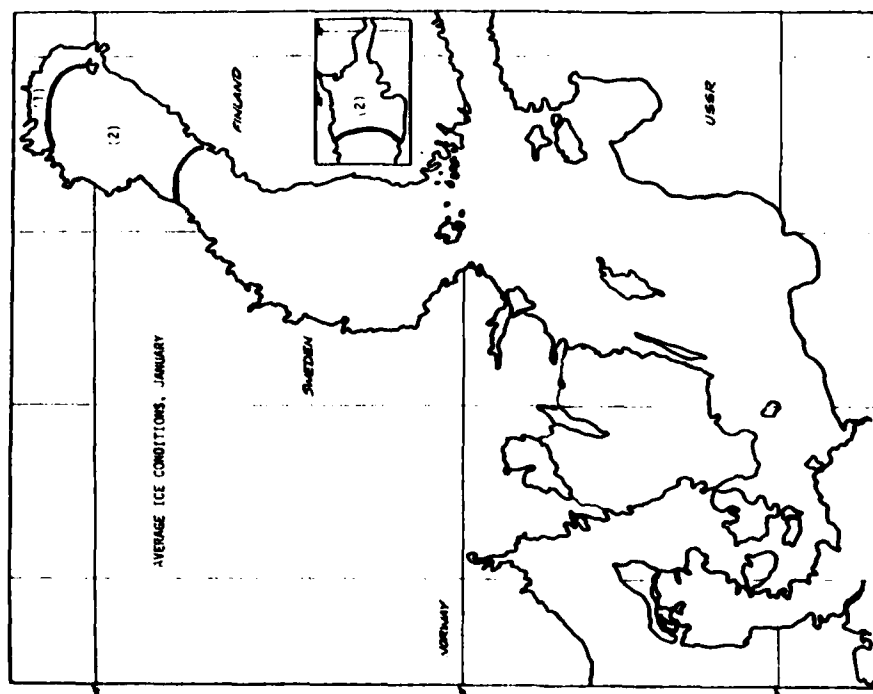


AVERAGE ICE CONDITIONS, JANUARY

ICE AREA	ICE CHARACTERISTICS
1	IV 2
2	IV 1

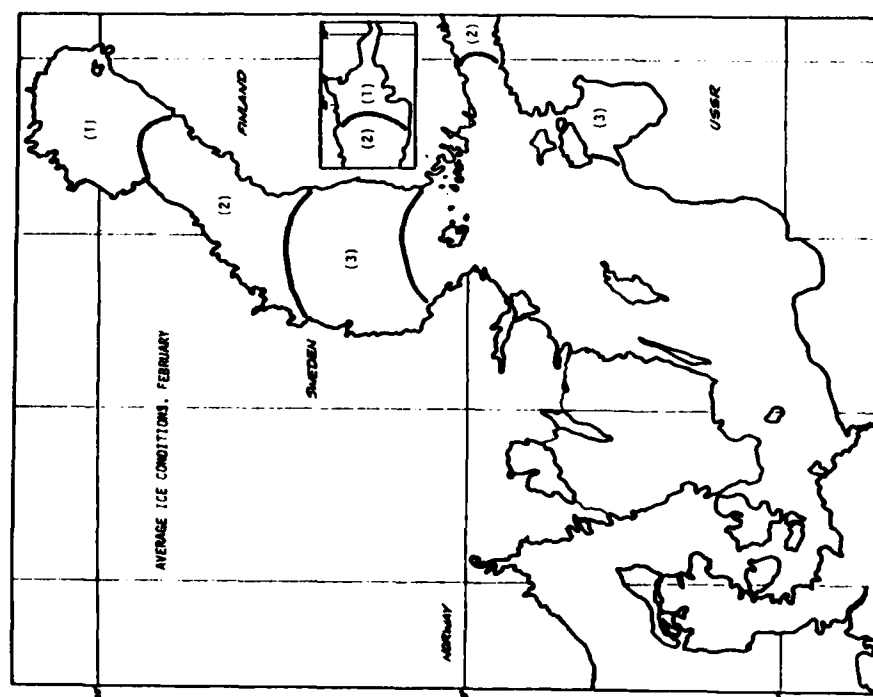


AVERAGE ICE CONDITIONS, FEBRUARY

ICE AREA	ICE CHARACTERISTICS
1	IV 3
2	IV 2
3	IV 1

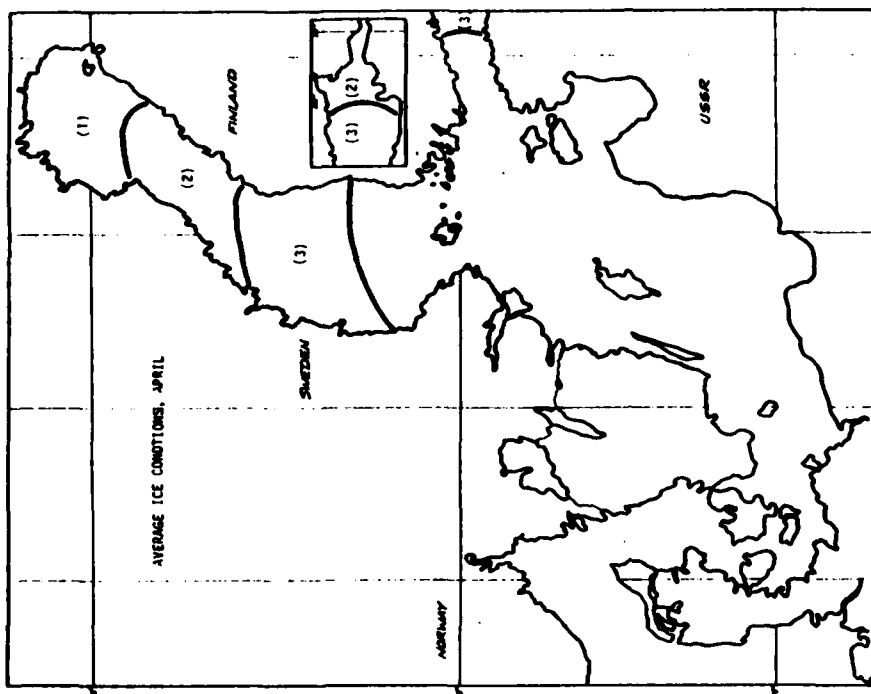

AVERAGE ICE CONDITIONS, APRIL

ICE AREA	ICE CHARACTERISTICS
1	FY 3
2	FY 2
3	FY 1

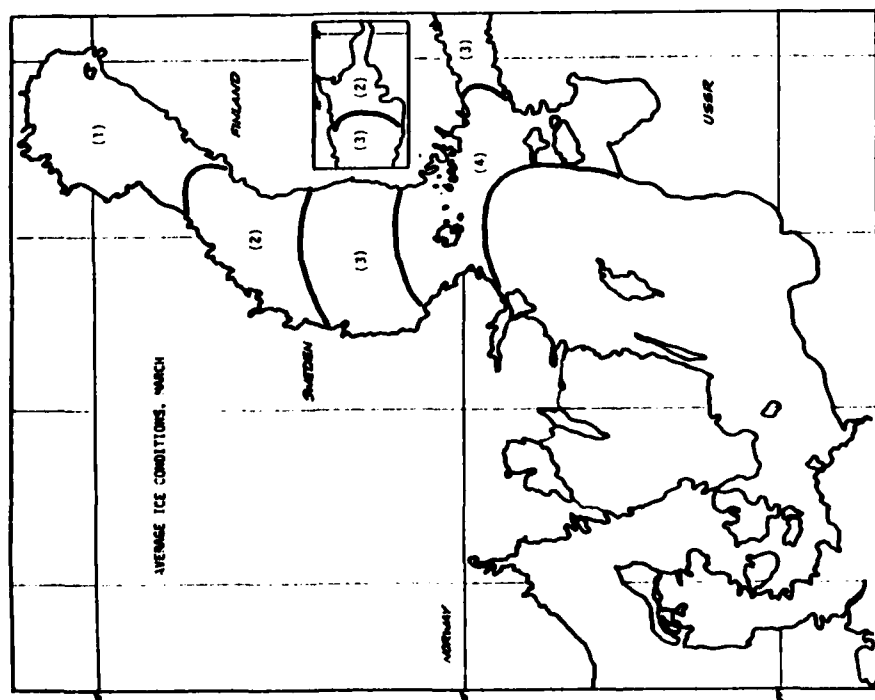

AVERAGE ICE CONDITIONS, MARCH

ICE AREA	ICE CHARACTERISTICS
1	FY 3
2	FY 2
3	FY 1.5
4	FY 1

APPENDIX A.7
WORLD METEOROLOGICAL ORGANIZATION SEA ICE NOMENCLATURE

ICE TERMS ARRANGED IN ALPHABETICAL ORDER

idge: *Ridge* which has undergone considerable weathering. These ridges best described as undulations.

ice: Submerged ice attached or anchored to the bottom, irrespective of nature of its formation.

ice: Ice without snow cover.

A large feature of *pack ice* arrangement; longer than it is wide; from to more than 100 km in width.

it: A large piece of floating *glacier ice*, generally showing less than above sea-level but more than 1 m and normally about 100-300 sq. m in area.

Situation of a vessel surrounded by ice and unable to move.

ie: (see *Floe*).

An extensive crescent-shaped indentation in the *ice edge*, formed by or wind or current.

ice: Accumulations of *floating ice* made up of fragments not more than across, the wreckage of other forms of ice.

is: From the point of view of the submariner, a downward projection from underside of the *ice canopy*; the counterpart of a *hummock*.

is: The breaking away of a mass of ice from an *ice wall*, *ice front*, or *ice*.

ack ice: *Pack ice* in which the *concentration* is 7/10 to 8/10 (6/8 to 7/8), composed of *floes* mostly in contact.

ed ice edge: Close, clear-cut *ice edge* compacted by wind or current; ly on the windward side of an area of *pack ice*.

ing: Pieces of *floating ice* are said to be compacting when they are cted to a converging motion, which increases ice *concentration* and/or ces stresses which may result in ice deformation.

pack ice: *Pack ice* in which the *concentration* is 10/10 (8/8) and no is visible.

ration: The ratio in tenths of the sea surface actually covered by ice e total area of sea surface, both ice-covered and *ice-free*, at a fic location or over a defined area.

ration boundary: A line approximating the transition between two areas *ack ice* with distinctly different *concentrations*.

Consolidated pack ice: *Pack ice* in which the *concentration* is 10/10 (8/8) and the *floes* are frozen together.

Consolidated ridge. A *ridge* in which the base has frozen together.

Crack: Any *fracture* which has not parted.

Dark nilas: *Nilas* which is under 5 cm in thickness and is very dark in color.

Deformed ice: A general term for ice which has been squeezed together and in places forced upwards (and downwards). Subdivisions are *rafted ice*, *ridged ice*, and *hummocked ice*.

Difficult area: A general qualitative expression to indicate, in a relative manner, that the severity of ice conditions prevailing in an area is such that navigation in it is difficult.

Diffuse ice edge: Poorly defined *ice edge* limiting an area of dispersed ice; usually on the leeward side of an area of *pack ice*.

Diverging: *Ice fields* or *floes* in an area are subjected to diverging or dispersive motion, thus reducing *ice concentration* and/or relieving stress in the ice.

Dried ice: *Sea ice* from the surface of which melt-water has disappeared after the formation of *cracks* and *thaw holes*. During the period of drying, the surface whitens.

Easy area: A general qualitative expression to indicate, in a relative manner, that ice conditions prevailing in an area are such that navigation in it is not difficult.

Fast ice: *Sea ice* which forms and remains fast along the coast, where it is attached to the shore, to an *ice wall*, to an *ice front*, between shoals or grounded *icebergs*. Vertical fluctuations may be observed during changes of sea-level. Fast ice may be formed *in situ* from sea water or by freezing of *pack ice* of any age to the shore, and it may extend a few metres or several hundred kilometres from the coast. Fast ice may be more than one year old and may then be prefixed with the appropriate age category (*old*, *second-year*, or *multi-year*). If it is thicker than about 2 m above sea-level it is called an *ice shelf*.

Fast-ice boundary: The *ice boundary* at any given time between *fast ice* and *pack ice*.

Fast-ice edge: The demarcation at any given time between *fast ice* and *open water*.

Finger rafted ice: Type of *rafted ice* in which *floes* thrust "fingers" alternately over and under the other.

Finger rafting: Type of rafting whereby interlocking thrusts are formed, each floe thrusting "fingers" alternately over and under the other. Common in *nilas* and *grey ice*.

Firn: Old snow which has recrystallized into a dense material. Unlike snow, the particles are to some extent joined together; but, unlike ice, the air spaces in it still connect with each other.

First-year ice: *Sea ice* of not more than one winter's growth, developing from *young ice*; thickness 30 cm - 2 m. May be subdivided into *thin first-year ice* / *white ice*, *medium first-year ice*, and *thick first-year ice*.

Flaw: A narrow separation zone between *pack ice* and *fast ice*, where the pieces of ice are in chaotic state; it forms when *pack ice* shears under the effect of a strong wind or current along the *fast ice* boundary.

Flaw lead: A passage-way between *pack ice* and *fast ice* which is navigable by surface vessels.

Flaw polynya: A *polynya* between *pack ice* and *fast ice*.

Floating ice: Any form of ice found floating in water. The principal kinds of floating ice are *lake ice*, *river ice*, and *sea ice*, which form by the freezing of water at the surface, and *glacier ice* (*ice of land origin*) formed on land or in an *ice shelf*. The concept includes ice that is stranded or grounded.

Floe: Any relatively flat piece of *sea ice* 20 m or more across. Floes are subdivided according to horizontal extent as follows:

GIANT: Over 10 km across.

VAST: 2-10 km across.

BIG: 500-2,000 m across.

MEDIUM: 100-500 m across.

SMALL: 20-100 m across.

Floeberg: A massive piece of *sea ice* composed of a *hummock*, or a group of *hummocks*, frozen together and separated from any ice surroundings. It may float up to 5 m above sea-level.

Flooded ice: *Sea ice* which has been flooded by melt-water or river water and is heavily loaded by water and wet snow.

Fracture: Any break or rupture through *very close pack ice*, *compact pack ice*, *consolidated pack ice*, *fast ice*, or a single *floe* resulting from deformation processes. Fractures may contain *brash ice* and/or be covered with *nilas* and/or *young ice*. Length may vary from a few meters to many kilometers.

Fracture zone: An area which has a great number of fractures.

Fracturing: Pressure process whereby ice is permanently deformed, and rupture occurs. Most commonly used to describe breaking across *very close pack ice*, *compact pack ice*, and *consolidated pack ice*.

Frazil ice: Fine spicules or plates of ice, suspended in water.

Friendly ice: From the point of view of the submariner, an *ice canopy* containing many large *skylights* or other features which permit a submarine to surface. There must be more than ten such features per 30 nautical miles (56 km) along the submarine's track.

Frost smoke: Fog-like clouds due to contact of cold air with relatively warm water, which can appear over openings in the ice, or leeward of the *ice edge*, and which may persist while ice is forming.

Giant floe: (see *Floe*).

Glacier: A mass of snow and ice continuously moving from higher to lower ground or, if afloat, continuously spreading. The principal forms of glacier are: inland ice sheets, *ice shelves*, *ice streams*, ice caps, ice piedmonts, cirque glaciers, and various types of mountain (valley) glaciers.

Glacier berg: An irregularly shaped *iceberg*.

Glacier ice: Ice in, or originating from, a *glacier*, whether on land or floating on the sea as *icebergs*, *berg bits*, or *growlers*.

Glacier tongue: Projecting seaward extension of a *glacier*, usually afloat. In the Antarctic glacier tongues may extend over many tens of kilometers.

Grease ice: A later stage of freezing than *frazil ice* when the crystals have coagulated to form a soupy layer on the surface. Grease ice reflects little light, giving the sea a matt appearance.

Grey ice: *Young ice* 10-15 cm thick. Less elastic than *nilas* and breaks on swell. Usually rafts under pressure.

Grey-white ice: *Young ice* 15-30 cm thick. Under pressure more likely to ridge than to raft.

Grounded hummock: Hummocked *grounded ice* formation. There are single grounded *hummocks* and lines (or chains) of grounded *hummocks*.

Grounded ice: *Floating ice* which is aground in shoal water.

Growler: Smaller piece of ice than a *berg bit* or *floeberg*, often transparent but appearing green or almost black in color, extending less than 1 m above the sea surface and normally occupying an area of about 20 sq. m.

Hostile ice: From the point of view of the submariner, an *ice canopy* containing no large *skylights*.

Hummock: A hillock of broken ice which has been forced upwards by pressure. May be fresh or weathered. The submerged volume of broken ice under the hummock, forced downwards by pressure, is termed a *hummock*.

Hummocked ice: *Sea ice* piled haphazardly one piece over another to form an uneven surface. When weathered, has the appearance of smooth hillocks.

Hummocking: The pressure process by which *sea ice* is forced into *hummocks*. When the floes rotate in the process it is termed screwing.

Iceberg: A massive piece of ice of greatly varying shape, more than 5 m above sea-level, which has broken away from a *glacier*, and which may be afloat or aground. Icebergs may be described as *tabular*, dome-shaped, sloping, pinnacled, weathered, or *glacier bergs*.

Iceberg tongue: A major accumulation of *icebergs* projecting from the coast, held in place by grounding and joined together by *fast ice*.

Ice blink: A whitish glare on low clouds above an accumulation of distant ice.

Ice-bound: A harbor, inlet, etc., is said to be ice-bound when navigation by ships is prevented on account of ice, except possibly with the assistance of an icebreaker.

Ice boundary: The demarcation at any given time between *fast ice* and *pack ice* or between areas of *pack ice* of different *concentrations*.

Ice breccia: Ice pieces of different age frozen together.

Ice cake: Any relatively flat piece of *sea ice* less than 20 m across.

Ice canopy: *Pack ice* from the point of view of the submariner.

Ice cover: The ratio of an area of ice of any concentration to the total area of sea surface within some large geographic local; this local may be global, hemispheric, or prescribed by a specific oceanographic entity such as Baffin Bay or the Barents Sea.

Ice edge: The demarcation at any given time between the open sea and *sea ice* of any kind, whether *fast* or *drifting*. It may be termed *compacted* or *diffuse*.

Ice field: Area of *pack ice* consisting of any size of *floes*, which is greater than 10 km across.

Icefoot: A narrow fringe of ice attached to the coast, unmoved by tides and remaining after the *fast ice* has moved away.

Ice-free: No *sea ice* present. There may be some *ice* of *land origin*.

Ice front: The vertical cliff forming the seaward face of an *ice shelf* or other floating *glacier* varying in height from 2-50 m or more above sea-level.

Ice island: A large piece of floating ice about 5 m above sea-level, which has broken away from an Arctic ice shelf, having a thickness of 30-50 m and an area of from a few thousand square meters to 500 sq. km or more, and usually characterized by a regularly undulating surface which gives it a ribbed appearance from the air.

Ice jam: An accumulation of broken *river ice* or *sea ice* caught in a narrow channel.

Ice keel: From the point of view of the submariner, a downward-projecting ridge on the underside of the *ice canopy*; the counterpart of a ridge. Ice keels may extend as much as 50 m below sea-level.

Ice limit: Climatological term referring to the extreme minimum or extreme maximum extent of the *ice edge* in any given month or period based on observations over a number of years. Term should be preceded by minimum or maximum.

Ice massif: A concentration of *sea ice* covering hundreds of square kilometers, which is found in the same region every summer.

Ice of land origin: Ice formed on land or in an *ice shelf*, found floating in water. The concept includes ice that is stranded or grounded.

Ice patch: An area of *pack ice* less than 10 km across.

Ice port: An embayment in an *ice front*, often of a temporary nature, where ships can moor alongside and unload directly onto the ice shelf.

Ice rind: A brittle shiny crust of ice formed on a quiet surface by direct freezing or from *grease ice*, usually in water of low salinity. Thickness to about 5 cm. Easily broken by wind or swell, commonly breaking in rectangular pieces.

Ice shelf: A floating ice sheet of considerable thickness showing 2-50 m or more above sea-level, attached to the coast. Usually of great horizontal extent and with a level or gently undulating surface. Nourished by annual snow accumulation and often also by the seaward extension of land *glaciers*. Limited areas may be aground. The seaward edge is termed an *ice front*.

Ice stream: Part of an inland ice sheet in which the ice flows more rapidly and not necessarily in the same direction as the surrounding ice. The margins are sometimes clearly marked by a change in direction of the surface slope but may be indistinct.

Ice under pressure: Ice in which deformation processes are actively occurring and hence a potential impediment or danger to shipping.

Ice wall: An ice cliff forming the seaward margin of a *glacier* which is not afloat. An ice wall is aground, the rock basement being at or below sea-level.

Lake ice: Ice formed on a lake, regardless of observed location.

Large fracture: More than 500 m wide.

Large ice field: An *ice field* over 20 km across.

Lead: Any *fracture* or passage-way through *sea ice* which is navigable by surface vessels.

Level ice: *Sea ice* which is unaffected by deformation.

Light nilas: *Nilas* which is more than 5 cm in thickness and rather lighter in color than *dark nilas*.

Mean ice edge: Average position of the *ice edge* in any given month or period based on observations over a number of years. Other terms which may be used are mean maximum ice edge and mean minimum ice edge.

Medium first-year ice: *First-year ice* 70-120 cm thick.

Medium floe: (see *Floe*).

Medium fracture: 200 to 500 m wide.

Medium ice field: An *ice field* 15-20 km across.

Multi-year ice: *Old ice* up to 3 m or more thick which has survived at least two summers' melt. *Hummocks* even smoother than in *second-year ice*, and the ice is almost salt-free. Color, where bare, is usually blue. Melt pattern consists of large interconnecting irregular *puddles* and a well-developed drainage system.

New ice: A general term for recently formed ice which includes *frazil ice*, *grease ice*, *slush*, and *shuga*. These types of ice are composed of ice crystals which are only weakly frozen together (if at all) and have a definite form only while they are afloat.

New ridge: *Ridge* newly formed with sharp peaks and slope of sides usually 40°. Fragments are visible from the air at low altitude.

Nilas: A thin elastic crust of ice, easily bending on waves and swell and under pressure, thrusting in a pattern of interlocking "fingers" (*finger rafting*). Has a matt surface and is up to 10 cm in thickness. May be subdivided into *dark nilas* and *light nilas*.

Nip: Ice is said to nip when it forcibly presses against a ship. A vessel so caught, though undamaged, is said to have been nipped.

Old ice: *Sea ice* which has survived at least one summer's melt. Most topographic features are smoother than on *first-year ice*. May be subdivided into *second-year ice* and *multi-year ice*.

Open pack ice: *Pack ice* in which the ice concentration is 4/10 to 6/10 (3/8 to less than 6/8) with many *leads* and *polynyas*, and the *floes* are generally not in contact with one another.

Open water: A large area of freely navigable water in which *sea ice* is present in concentrations less than 1/10 (1/8). When there is no sea ice present, the area should be termed *ice-free*, even though icebergs are present.

Pack ice: Term used in a wide sense to include any area of *sea ice*, other than *fast ice*, no matter what from it takes or how it is disposed.

Pancake ice: Predominantly circular pieces of ice from 30 cm - 3 m in diameter, and up to about 10 cm in thickness, with raised rims due to the pieces striking against one another. It may be formed on a slight swell from *grease ice*, *shuga* or *slush* or as a result of the breaking of *ice rind*, *nilas* or, under severe conditions of swell or waves, of *grey ice*. It also sometimes forms at some depth, at an interface between water bodies of different physical characteristics, from where it floats to the surface; its appearance may rapidly cover wide areas of water.

Polynya: Any non-linear shaped opening enclosed in ice. Polynyas may contain *brash ice* and/or be covered with *new ice*, *nilas* or *young ice*; submariners refer to these as *skylights*. Sometimes the polynya is limited on one side by the coast and is called a *shore polynya* or by *fast ice* and is called a *flaw polynya*. If it recurs in the same position every year, it is called a *recurring polynya*.

Puddle: An accumulation on ice of melt-water, mainly due to melting snow, but in the more advanced stages also to the melting of ice. Initial stage consists of patches of melted snow.

Rafted ice: Type of *deformed ice* formed by one piece of ice overriding another.

Rafting: Pressure processes whereby one piece of ice overrides another. Most common in *new* and *young ice*.

Ram: An underwater ice projection from an *ice wall*, *ice front*, *iceberg*, or *floe*. Its formation is usually due to a more intensive melting and erosion of the unsubmerged part.

Recurring polynya: A *polynya* which recurs in the same position every year.

Ridge: A line or wall of broken ice forced up by pressure. May be fresh or weathered. The submerged volume of broken ice under a ridge, forced downwards by pressure, is termed an *ice keel*.

Ridged ice: Ice piled haphazardly one piece over another in the form of ridges or walls. Usually found in first-year ice.

Ridged-ice zone: An area in which much *ridged ice* with similar characteristics has formed.

Ridging: The pressure process by which *sea ice* is forced into *ridges*.

River ice: Ice formed on a river, regardless of observed location.

Rotten ice: *Sea ice* which has become honeycombed and which is in an advanced state of disintegration.

Sastrugi: Sharp, irregular ridges formed on a snow surface by wind erosion and deposition. On mobile *floating ice* the ridges are parallel to the direction of the prevailing wind at the time they were formed.

Sea ice: Any form of ice found at sea which has originated from the freezing of sea water.

Second-year ice: *Old ice* which has survived only one summer's melt. Because it is thicker and less dense than *first-year ice*, it stands higher out of the water. In contrast to *multi-year ice*, summer melting produces a regular pattern of numerous small *puddles*. Bare patches and puddles are usually greenish-blue.

Shearing: An area of *pack ice* is subject to shear when the ice motion varies significantly in the direction normal to the motion, subjecting the ice to rotational forces. These forces may result in phenomena similar to a *flaw*.

Shore lead: A *lead* between *pack ice* and the shore or between *pack ice* and an *ice front*.

Shore polynya: A *polynya* between *pack ice* and the coast or between *pack ice* and an *ice front*.

Shuga: An accumulation of spongy white ice lumps, a few centimeters across; they are formed from *grease ice* or *slush* and sometimes from *anchor ice* rising to the surface.

Skylight: From the point of view of the submariner, thin places in the *ice canopy*, usually less than 1 m thick and appearing from below as relatively light, translucent patches in dark surroundings. The under-surface of a skylight is normally flat. Skylights are called large if big enough for a submarine to attempt to surface through them (120 m), or small if not.

Slush: Snow which is saturated and mixed with water on land or ice surfaces, or as a viscous floating mass in water after a heavy snowfall.

Small floe: (see *Floe*).

Small fracture: 50 to 200 m wide.

Small ice cake: An ice cake less than 2 m across.

Small ice field: An *ice field* 10-15 km across.

Snow-covered ice: Ice covered with snow.

Snowdrift: An accumulation of wind-blown snow deposited in the lee of obstructions or heaped by wind eddies. A crescent-shaped snowdrift, with ends pointing down-wind, is known as a snow barchan.

Standing floe: A separate *floe* standing vertically or inclined and enclosed by rather smooth ice.

Stranded ice: Ice which has been floating and has been deposited on the shore by retreating high water.

Strip: Long narrow area of *pack ice*, about 1 km or less in width, usually composed of small fragments detached from the main mass of ice, and run together under the influence of wind, swell, or current.

Tabular berg: A flat-topped *iceberg*. Most tabular bergs form by *calving* from an *ice shelf* and show horizontal banding.

Thaw holes: Vertical holes in *sea ice* formed when surface *puddles* melt through to the underlying water.

Thick first-year ice: *First-year ice* 30-70 cm thick.

Tide crack: Crack at the line of junction between an immovable *ice foot* or *ice wall* and *fast ice*, the latter subject to rise and fall of the tide.

Tongue: A projection of the ice edge up to several kilometers in length, caused by wind or current.

Vast floe: (see *Floe*).

Very close pack ice: *Pack ice* in which the *concentration* is 9/10 to less than 10/10 (7/8 to less than 8/8).

Very open pack ice: *Pack ice* in which the *concentration* is 1/10 to 3/10 (1/8 to less than 3/8) and water preponderates over ice.

Very small fracture: 0 to 50 m wide.

Very weathered ridge: *Ridge* with tops very rounded, slope of sides usually 20° - 30°.

Water sky: Dark streaks on the underside of low clouds, indicating the presence of water features in the vicinity of *sea ice*.

Weathered ridge: *Ridge* with peaks slightly rounded and slope of sides usually 30° to 40°. Individual fragments are not discernible.

Weathering: Processes of ablation and accumulation which gradually eliminate irregularities in an ice surface.

White ice: See *Thin first-year ice*.

Young coastal ice: The initial stage of *fast ice* formation consisting of *nilas* or *young ice*, its width varying from a few meters up to 100-200 m from the shoreline.

Young ice: Ice in the transition stage between *nilas* and *first-year ice*, 10-30 cm in thickness. May be subdivided into *grey ice* and *grey-white ice*.

APPENDIX B
CALCULATED ICE STRENGTHENED SCANTLINGS
FOR THREE REPRESENTATIVE SHIPS

Abbreviations used in this Appendix are as follows:

MS = Mild steel
HTS = Higher strength steel
ASTM = American Society for Testing and Materials
USCG = United States Coast Guard
ABS = American Bureau of Shipping
LR = Lloyd's Register of Shipping (British)
DNV = Det Norske Veritas (Norwegian)
BV = Bureau Veritas (French)
NKK = Nippon Kaiji Kyokoi (Japanese)
GL = Germanischer Lloyd (German)

TABLE B-1.1
ABS STRENGTHENING FOR
NAVIGATION IN ICE

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
A	NA	12.9	5.8	0.60	NA	12.9	5.8	0.50	NA	12.9	5.8	0.50
B	NA	12.9	5.8	0.60	NA	25.8	5.8	0.60-0.46	NA	25.8	5.8	0.46
C	NA	12.9	5.8 w/ 4.4 inter	0.50	NA	25.8	5.8	0.40	NA	25.8	5.8	0.40*
IAA	234.5	25.8	51.4	1.26	122.5	25.8	26.9	0.96	89.5	25.8	19.6	0.83
IA	213.5	25.8	46.8	1.24	98.0	25.8	21.5	0.86	65.5	25.8	14.4	0.72
IB	192.0	25.8	42.1	1.18	65.5	25.8	14.4	0.72	41.0	25.8	9.0	0.59
IC	171.0	25.8	37.5	1.11	34.1	25.8	7.5	0.54	17.1	25.8	3.8	0.41*

$$Y = 50,000 \text{ psi}$$

* Minimum should probably be equal to rule value of 0.42.

Note: Classes IAA, IA, IB, & IC are identical to the Finnish-Swedish Regulations for Navigation in Ice.

TABLE B-1.1 (Continued)

LLOYD'S STRENGTHENING FOR
NAVIGATION IN ICE
POLAR STAR

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
1*	NA	12.9	5.8	1.25	NA	12.9	5.8	0.55	NA	12.9	5.8	0.55
1	NA	12.9	5.8	0.52	NA	12.9	5.8	0.50	NA	12.9	5.8	0.50
2	NA	12.9	5.8	0.52	NA	25.8	5.8	0.56	NA	25.8	5.8	0.56
3	NA	12.9	5.8 w/ 2.9-4.6 inter	0.50	NA	25.8	5.8	0.40	NA	25.8	5.8	0.42
IA Super	←				←				←			
IA	←				←				←			
IB	←				←				←			
IC	←				←				←			

TABLE B-1.1 (Continued)

CANADIAN ASPPR STRENGTHENING
FOR NAVIGATION IN ICE
POLAR STAR¹

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
1	250	25.8 (16.0) ²	54.8 (34.0) ²	1.22 (0.75) ²	100	25.8 (16.0)	21.9 (13.6)	0.77 (0.48)	100	25.8 (16.0)	21.9 (13.6)	0.77 (0.48)
1A	400		87.7 (54.4)	1.54 (0.95)	260		57.0 (35.3)	1.24 (0.77)	325		71.2 (44.2)	1.39 (0.86)
2	600		131.5 (81.6)	1.88 (1.17)	400		87.7 (54.4)	1.54 (0.95)	500		109.6 (68.0)	1.72 (1.07)
3	800		175.4 (108.8)	2.18 (1.35)	530		116.2 (72.0)	1.77 (1.10)	660		144.7 (89.7)	1.98 (1.23)
4	1000		219.2 (135.9)	2.43 (1.51)	660		144.7 (89.7)	1.98 (1.23)	820		179.7 (111.5)	2.20 (1.37)
6	1200		263.0 (163.1)	2.66 (1.65)	750		164.4 (102.0)	2.11 (1.31)	940		206.0 (127.8)	2.36 (1.46)
7	1400		306.9 (190.3)	2.88 (1.78)	850		186.3 (115.5)	2.24 (1.39)	1050		230.2 (142.7)	2.49 (1.55)
8	1500		328.8 (203.9)	2.98 (1.85)	950		208.2 (129.1)	2.37 (1.47)	1200		263.0 (163.1)	2.66 (1.65)
10	1500		328.8 (203.9)	2.98 (1.85)	950		208.2 (129.1)	2.37 (1.47)	1200		263.0 (163.1)	2.66 (1.65)

¹ Assuming no waste stowed in contact with shell.² Scantlings for alternate frame spacing.

NOTE: Yield stress assumed to be 50,000 psi.

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
ICEC*	N/A	12.0	13.5- 1.3	0.69	N/A	25.8	5.8	0.40	N/A	25.8	5.8	0.42
IA*			Same as ABS IAA									
IA			Same as ABS IA									
IB			Same as ABS IB									
IC			Same as ABS IC									
Icebreaker	N/A	16.3	27.5	1.38	N/A	16.3	27.5	1.11	N/A	16.3	27.5	1.38
Arctic Icebreaker		16.3	34.4	1.79	N/A	16.3	34.4	1.44	N/A	16.3	34.4	1.79

... should not exceed ABS IC.


AD-A120 602

A RATIONAL BASIS FOR THE SELECTION OF ICE STRENGTHENING 2/2
CRITERIA FOR SHIP. (U) ARCTEC INC COLUMBIA MD

UNCLASSIFIED


J C COBURN ET AL. 11 JUL 80 SR-1267-VOL-2 SSC-310
DOT-CG-904937-A

F/G 13/10 NL

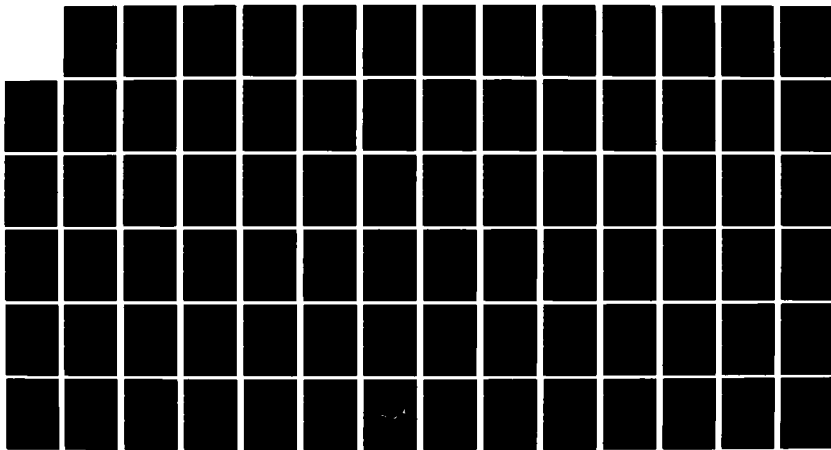

END

FILMED
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

TABLE B-1.1 (Continued)
BUREAU VERITAS STRENGTHENING FOR
NAVIGATION IN ICE
POLAR STAR*

Ice Class	FORWARD			MIDSHIP			AFT		
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)
Glance 1-Super	N/A	12.9	11.6-5.8	1.26	N/A	12.9	5.8	1.26	N/A
Glance I	N/A	12.9	11.6-5.8	0.60	N/A	12.9	5.8	0.48	N/A
Glance II	N/A	12.9	11.6-5.8	0.60	N/A	25.8	5.8	0.46	N/A
III	N/A	12.9	5.8-4.35	0.50	N/A	25.8	5.8	0.40	N/A
IA Super	Same as ABS IAA								
IA	Same as ABS IA								
IB	Same as ABS IB								
IC	Same as ABS IC								

* Rule scantlings are from ABS.

TABLE B-1.1 (Continued)
NIPPON KAIJI KYOKAI
STRENGTHENING FOR NAVIGATION IN ICE
POLAR STAR

Ice Class	FORWARD			MIDSHIP			AFT		
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)
AA	N/A	16.0	57.1	1.31-1.09	N/A	16.0	27.5	0.88	N/A
A	N/A	16.0	38.1	1.10-0.92	N/A	16.0	18.7	0.79	N/A
B	N/A	16.0	26.0	1.10-0.92	N/A	25.8	5.8	0.69	N/A
C	N/A	16.0	12.1	0.95-0.79	N/A	25.8	5.8	0.67	N/A
IA-Super	Same as ABS IAA								
IA	Same as ABS IA								
IB	Same as ABS IB								
IC	Same as ABS IC								

V = 18 knots

TABLE B-1.1 (Continued)

USSR REGISTER OF SHIPPING
STRENGTHENING FOR NAVIGATION IN ICE
POLAR STAR

Ice Class	FORWARD			MIDSHIP			AFT		
	P (psi)	Frame Spacing (in)	Frame S.M. (in)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in)	Plating Thick. (in)	P (psi)
Y/A									
YA	273	12.9	15.6	0.71	129	12.9	10.1	0.54	129
A1	162	12.9	7.2	0.60	99	12.9	6.3	0.50	99
A2	N/A	12.9	7.0-5.8	0.60	N/A	25.8	5.8	0.46	N/A
A3	N/A	12.9	5.8-4.4	0.50	N/A	25.8	5.8	0.40	N/A
A4	N/A	15.5	5.8	0.50	N/A	25.8	5.8	0.40	N/A

Each Vessel Considered Separately

 $\sigma_y = 50,000 \text{ psi}$

Note: Rule scantlings are from ABS.

TABLE B-1.1 (Continued)

REGISTER OF THE PEOPLES REPUBLIC
OF CHINA
POLAR STAR*

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
BI*	NA	12.9	11.6	0.72	NA	12.9	5.8	0.56	NA	12.9	11.6	0.50
BI	NA	12.9	11.6	0.60	NA	12.9	5.8	0.50	NA	12.9	11.6	0.48
BII	NA	12.9	11.6	0.56	NA	25.8	5.8	0.46	NA	25.8	5.8	0.44
BIII	NA	12.9	5.8	0.50	NA	25.8	5.8	0.40	NA	25.8	5.8	0.42
B (River Vessels)	NA	12.9	5.8-1.7	0.55	NA	25.8	5.8	0.40	NA	25.8	5.8	0.42

*Rule scantlings are from ABS.

TABLE B-1.2

ABS STRENGTHENING FOR
NAVIGATION IN ICEM.V. ARCTIC

M.V. ARCTIC												
Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
A	NA	16.5	116.9	1.00	NA	16.5	116.9	0.84	NA	16.5	116.9	0.84
B	NA	16.5	116.9	1.00	NA	32.9	116.9	1.00-0.77	NA	32.9	116.9	0.77
C	NA	16.5	116.9 w/ 87.7 inter.	0.84	NA	32.9	116.9	0.67	NA	32.9	116.9	0.67
IAA	234.5	32.9	234.2	1.57	122.5	32.9	122.3	1.16	89.5	32.9	89.4	1.00
IA	213.5	32.9	213.2	1.50	98.0	32.9	97.9*	1.04	65.5	32.9	65.4*	0.87
IB	192.0	32.9	141.8	1.43	65.5	32.9	65.9*	0.87	41.0	32.9	41.0*	0.70
IC	171.0	32.9	170.8	1.35	34.1	32.9	32.9*	0.65***	17.1	32.9	17.1*	0.48**

Y = 50,000 psi

*** Minimum should probably be equal to rule value of 0.67.

** Minimum should probably be equal to rule value of 0.60

* Minimum S.M. should probably be equal to rule value of 116.9.

TABLE B-1.2 (Continued)

LLOYD'S STRENGTHENING FOR

NAVIGATION IN ICE

M.V. ARCTIC

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
1*	NA	16.5	116.9	1.25	NA	16.5	116.9	0.75	NA	16.5	116.9	0.67
1	NA	16.5	116.9	0.80	NA	16.5	116.9	0.67	NA	16.5	116.9	0.67
2	NA	16.5	116.9	0.80	NA	32.9	116.9	0.87	NA	32.9	116.9	0.87
3	NA	16.5	116.9 w/ 58.5-93.5 inter	0.67	NA	32.9	116.9	0.67	NA	32.9	116.9	0.60
IA Super	←				←				←			
IA	←				←				←			
IB	←				←				←			
IC	←				←				←			

TABLE B-1.2 (Continued)
CANADIAN ASPPR STRENGTHENING
FOR NAVIGATION IN ICE
MV ARCTIC¹

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
1	250	32.9 (16.5) ³	249.7 (125.2) ³	1.55 (0.78) ³	100	32.9 (16.5)	99.9 ² (50.1)	0.98 (0.49)	100	32.9 (16.5)	99.9 ² (50.1)	0.98 (0.49)
1A	400		399.5 (200.4)	1.96 (0.98)	100		99.9 ² (50.1)	0.98 (0.49)	325		324.6 (162.8)	1.77 (0.88)
2	600		599.2 (300.5)	2.40 (1.20)	260		259.7 (130.2)	1.58 (0.79)	500		499.4 (250.4)	2.19 (1.10)
3	800		799.0 (400.7)	2.77 (1.39)	400		399.5 (200.4)	1.96 (0.98)	660		659.2 (330.2)	2.52 (1.26)
4	1000		998.7 (500.9)	3.10 (1.55)	530		529.3 (265.5)	2.26 (1.13)	820		819.0 (410.7)	2.81 (1.40)
6	1200		1198.5 (601.1)	3.40 (1.70)	660		659.2 (330.2)	2.52 (1.26)	940		938.8 (470.8)	3.01 (1.50)
7	1400		1398.2 (701.2)	3.67 (1.84)	750		749.1 (375.7)	2.69 (1.34)	1050		1048.7 (525.9)	3.18 (1.59)
8	1500		1498.1 (751.3)	3.80 (1.90)	850		848.9 (425.8)	2.86 (1.43)	1200		1198.5 (601.1)	3.40 (1.70)
10	1500		1498.1 (751.3)	3.80 (1.90)	950		948.8 (475.8)	3.02 (1.51)	1200		1198.5 (601.1)	3.40 (1.70)

1. With side tanks.
 2. Should be equal to rule value of 116.9.
 3. Scantlings for alternate frame spacing.
- NOTE: Yield stress assumed to be 50,000 psi.

TABLE B-1.2 (Continued)
DET NORSKE VERITAS STRENGTHENING
FOR NAVIGATION IN ICE
M.V. ARCTIC

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
ICEC*	N/A	12.0	325-242	1.00	N/A	32.9	116.9	0.67	N/A	32.9	116.9	0.60
IA*			Same as ABS IAA									
IA			Same as ABS IA									
IB			Same as ABS IB									
IC			Same as ABS IC									
Icebreaker	N/A	20.5	1161	0.85	N/A	20.5	1161	0.68	N/A	20.5	1161	0.85
Arctic Icebreaker	N/A	20.5	1451	1.11	N/A	20.5	1451	0.98	N/A	20.5	1451	1.11

* Scantlings should not exceed ABS IC.

TABLE B-1.2 (Continued)
BUREAU VERITAS STRENGTHENING FOR
NAVIGATION IN ICE
M.V. ARCTIC*

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
Glace I-Super	N/A	16.5	233.8-116.9	1.26	N/A	16.5	116.9	1.20	N/A	16.5	233.8-116.9	1.10
Glace I	N/A	16.5	233.8-116.9	1.01	N/A	16.5	116.9	0.80	N/A	16.5	233.8-116.9	0.80
Glace II	N/A	16.5	233.8-116.9	1.01	N/A	32.9	116.9	0.77	N/A	32.9	116.9	0.77
Glace III	N/A	16.5	116.9 87.7	0.84	N/A	32.9	116.9	0.67	N/A	32.9	116.9	0.60
IA Super	Same as ABS IAA											
IA	Same as ABS IA											
IB	Same as ABS IB											
IC	Same as ABS IC											

*Rule values are from ABS.

TABLE B-1.2 (Continued)

NIPPON KAIJI KYOKAI

STRENGTHENING FOR NAVIGATION IN ICE

M.V. ARCTIC

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
AA	N/A	16.5	10.91	1.57-1.31	N/A	16.5	134.6	1.04	N/A	16.5	10.91	1.12-0.94
A	N/A	16.5	7.27	1.31-1.09	N/A	16.5	90.2	0.94	N/A	16.5	7.27	1.12-0.94
B	N/A	16.5	4.96	1.31-1.09	N/A	32.9	116.9	0.89	N/A	16.5	4.96	0.80-0.67
C	N/A	16.5	2.31	1.12-0.94	N/A	32.9	116.9	0.67	N/A	16.5	2.31	0.60
IA-Super	Same as ABS IAA											
IA	Same as ABS IA											
IB	Same as ABS IB											
IC	Same as ABS IC											

V = 17 knots

TABLE B-1.2 (Continued)

USSR REGISTER OF SHIPPING
STRENGTHENING FOR NAVIGATION IN ICE

M.V. ARCTIC

Ice Class	FORWARD			MIDSHIP			AFT		
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)
YA	409	16.5	98.6	1.06	255	16.5	120.6	0.84	255
A1	245	16.5	45.1	1.00	224	16.5	79.5	0.83	224
A2	NA	16.5	140.3-116.9	1.00	NA	32.9	116.9	0.77	NA
A3	NA	16.5	116.9-87.7	0.84	NA	32.9	116.9	0.67	NA
A4	NA	19.7	116.9	0.84	NA	32.9	116.9	0.67	NA

Each Vessel Considered Separately

NOTE: Rule scantlings are from ABS.

TABLE B-1.2 (Continued)

REGISTER OF THE PEOPLES REPUBLIC

OF CHINA

M.V. ARCTIC*

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
BI*	NA	16.5	234	1.21	NA	16.5	116.9	0.94	NA	16.5	234	0.84
BI	NA	16.5	234	1.00	NA	16.5	116.9	0.80	NA	16.5	234	0.80
BII	NA	16.5	323	0.94	NA	32.9	116.9	0.74	NA	32.9	116.9	0.74
BIII	NA	16.5	116.9	0.84	NA	32.9	116.9	0.67	NA	32.9	116.9	0.60
B (River Vessels)	NA	16.5	116.9-35.1	0.76	NA	32.9	116.9	0.67	NA	32.9	116.9	0.60

*Rule scantlings are from ABS.

TABLE B-1.3
ABS STRENGTHENING FOR
NAVIGATION IN ICE
ARCTIC TANKER

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
A	NA	19.8	38.4	1.00	NA	19.8	38.4	1.00*	NA	19.8	38.4	1.00
B	NA	19.8	38.4	1.00	NA	39.5	38.4	1.00*	NA	39.5	38.4	1.00
C	NA	19.8	38.4 w/ 28.8 inter	1.00	NA	39.5	38.4	1.00*	NA	39.5	38.4	0.78
IAA	234.5	39.5	67.8	1.81	122.5	39.5	35.4**	1.33	89.5	39.5	25.9**	1.15
IA	213.5	39.5	61.7	1.73	98.0	39.5	28.3**	1.20	65.5	39.5	18.9**	0.99
IB	192.0	39.5	55.5	1.64	65.5	39.5	18.9**	0.99*	41.0	39.5	11.9**	0.80
IC	171.0	39.5	49.4	1.55	34.1	39.5	9.85**	0.74	17.1	39.5	4.9**	0.55***

$$Y = 50,000 \text{ psi}$$

***Should probably be equal to rule value of 0.78.

****Should probably be equal to rule value of 38.4.**

*Should probably be equal to rule value of 1.05.

TABLE B-1.3 (Continued)

LLOYD'S STRENGTHENING FOR

NAVIGATION IN ICE

ARCTIC TANKER

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
1*	NA	19.8	38.4	1.25	NA	19.8	38.4	1.25	NA	19.8	38.4	1.15
1	NA	19.8	38.4	1.00	NA	19.8	38.4	1.00*	NA	19.8	38.4	1.00
2	NA	19.8	38.4	1.00	NA	39.5	38.4	1.00*	NA	39.5	38.4	1.00
3	NA	19.8	38.4 w/ 19.2-30.7 inter	1.00	NA	39.5	38.4	1.05	NA	39.5	38.4	0.78
IA Super	←	←	←	←	←	←	←	←	←	←	←	←
IA	←	←	←	←	←	←	←	←	←	←	←	←
IB	←	←	←	←	←	←	←	←	←	←	←	←
IC	←	←	←	←	←	←	←	←	←	←	←	←

* Should probably be equal to rule value of 1.05.

CANADIAN ASPPR STRENGTHENING FOR NAVIGATION IN ICE ARCTIC TANKER¹

1. No side tanks; waste stowed next to shell.
2. Should be equal to rule value of 38.5.
3. Scantlings for alternate frame spacing.

TABLE B-1.3 (Continued)
DET NORSKE VERITAS STRENGTHENING FOR
NAVIGATION IN ICE
ARCTIC TANKER

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in)	Plating Thick. (in)
ICE C*	N/A	12.0	131-760	1.00	N/A	39.5	38.4	1.05	N/A	39.5	30.4	0.78
IA*		Same as ABS IAA										
IA		Same as ABS IA										
IB		Same as ABS IB										
IC		Same as ABS IC										
Icebreaker	N/A	27.4	61.2	3.17	N/A	27.4	61.2	2.53	N/A	27.9	61.2	3.17
Arctic Icebreaker	N/A	27.4	76.5	4.12	N/A	27.9	76.5	3.29	N/A	27.9	76.5	4.12

* Scantlings should not exceed ABS IC.

TABLE B-1.3 (Continued)
BUREAU VERITAS STRENGTHENING
FOR NAVIGATION IN ICE
ARCTIC TANKER*

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
Glacé I-Super	N/A	19.8	76.8-38.4	1.26	N/A	19.8	38.4	1.26	N/A	19.8	7.68-38.4	1.26
Glacé I	N/A	19.8	76.8-38.4	1.00	N/A	19.8	38.4	1.00**	N/A	19.8	7.68-38.4	1.00
Glacé II	N/A	19.8	76.8-38.4	1.00	N/A	39.5	38.4	1.00**	N/A	39.5	38.4	1.00
III	N/A	19.8	38.4-28.8	1.00	N/A	39.5	38.4	1.00**	N/A	39.5	38.4	1.00
IA Super	Same as ABS IAA											
IA	Same as ABS IA											
IB	Same as ABS IB											
IC	Same as ABS IC											

** Should be equal to rule value of 1.05.

* Rule values are from ABS.

TABLE B-1.3 (Continued)
NIPPON KAIJI KYOKAI
STRENGTHENING FOR NAVIGATION IN ICE
ARCTIC TANKER

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
AA	N/A	19.8	185.7	1.99-1.66	N/A	19.8	98.7	1.31	N/A	19.8	185.7	1.41-1.18
A	N/A	19.8	123.8	1.66-1.38	N/A	19.8	66.2	1.18	N/A	19.8	123.8	1.41-1.18
B	N/A	19.8	84.4	1.66-1.38	N/A	39.5	38.4	1.12	N/A	19.8	84.4	1.00-0.83
C	N/A	19.8	39.4	1.41-1.18	N/A	39.5	38.4	1.05	N/A	19.8	39.4	0.78
IA-super	Same as ABS IAA											
IA	Same as ABS IA											
IB	Same as ABS IB											
IC	Same as ABS IC											

V = 24 knots

TABLE B-1.3 (Continued)
USSR REGISTER OF SHIPPING
STRENGTHENING FOR NAVIGATION IN ICE
ARCTIC TANKER

Ice Class	FORWARD			MIDSHIP			AFT		
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)
Y A									
Y	1030	19.8	70.5	2.02	487	19.8	51.8	1.39	487
1	619	19.8	32.3	1.58	458	19.8	34.2	1.35	458
2	NA	19.8	46.1-38.4	1.00	NA	39.5	38.4	1.05	NA
3	NA	19.8	38.4-28.8	1.00	NA	39.5	38.4	1.05	NA
4	NA	23.7	38.4	1.00	NA	39.5	38.4	1.05	NA

Each Vessel Considered Separately

NOTE: Rule scantlings are from ABS.

TABLE B-1.3 (Continued)
REGISTER OF THE PEOPLES REPUBLIC
OF CHINA

Ice Class	FORWARD				MIDSHIP				AFT			
	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)	P (psi)	Frame Spacing (in)	Frame S.M. (in ³)	Plating Thick. (in)
BI*	NA	19.8	76.8	1.26	NA	19.8	38.4	1.26	NA	19.8	76.8	1.26
BI	NA	19.8	76.8	1.00	NA	19.8	38.4	1.00***	NA	19.8	76.8	1.00
BII	NA	19.8	76.8	1.00	NA	39.5	38.4	1.00***	NA	39.5	38.4	1.00
BIII	NA	19.8	38.4	1.00	NA	39.5	38.4	1.05	NA	39.5	38.4	0.78
B (River Vessels)	NA	19.8	38.4-11.5	0.55**	NA	39.5	38.4	1.05	NA	39.5	38.4	0.78

*** Should be equal to rule value of 1.05.

** Should be equal to rule value of 0.78.

* Rule Scantlings are from ABS.

APPENDIX B-2
CALCULATED LOAD-CARRYING CAPABILITIES OF RESULTING
SCANTLINGS FOR THREE REPRESENTATIVE SHIPS

METHOD USED TO CALCULATE THE LOAD CARRYING CAPABILITY OF SHELL PLATING AND TRANSVERSE FRAMES

The load carrying capability of each of the ice strengthened structures was calculated by the method used by Johansson [B-16] in the analysis of ice damage data. This method assumes that the plating and framing can no longer carry a load when 3 plastic hinges are formed.

Plating is assumed to be a fixed-fixed beam with a uniformly distributed load. Then the pressure to form 3 plastic hinges is

$$P \text{ [psi]} = \frac{4\sigma_y t^2}{s^2 f_d} \quad (\text{B-1})$$

where

σ_y = yield stress of the material [psi]

t = plating thickness [in]

s = frame spacing [in]

f_d = a factor which gives a reduction in plating stress due to limited vertical extension of the ice pressure

Transverse frames are assumed to be fixed-fixed beams with a uniformly distributed load 800 mm long acting at mid-span. Then the pressure which the frames will support prior to development of three plastic hinges is:

$$P = \frac{16\sigma_y \text{ [SM]}}{cs(2l-c)} \quad (\text{B-2})$$

where

σ_y and s are defined above

l = frame span [ft]

c = extent of the load [in]

SM = section modulus of the frame and associated plating [in³]

Substituting 800 mm [31.5 in] for c and applying unit conversion constants, equation (B-2) becomes:

$$P \text{ [psi]} = \frac{0.254 \sigma_y \text{ [S.M.]}}{s(12l-15.75)} \quad (\text{B-3})$$

Then the normal load carrying capability is the load the plating or framing will carry (P) over the pressure specified in the rules (P_{rule}).

TABLE B-2.1
COMPARISON OF ICE STRENGTHENED SCANTLINGS
IN TERMS OF NORMALIZED LOAD CARRYING CAPABILITY

POLAR STAR										
RULE	CLASS	AREA	FRAME SPAC. [in]	FRAME S.M. [in²]	PLATE THICK. [in]	P/P Rule	P _{Plate} [psi]	P _{Frame} [psi]	P/P Rule	
ABS	+A1	Mid	25.8	5.8	0.40	NA	55	33	NA	
		Bow & Stern	25.8	5.8	0.42	NA	60	33	NA	
	A	B	12.9	5.6	0.60	7.35	441	66	2.00	
		M	12.9	5.8	0.50	5.58	307	66	2.00	
		S	12.9	5.8	0.50	5.12	307	66	2.00	
	B	B	12.9	5.8	0.60	7.35	441	66	2.00	
		M	25.8	5.8	0.53	1.75	96	33	1.00	
		S	25.8	5.8	0.46	1.20	72	33	1.00	
	C	B	12.9	5.1	0.50	5.12	307	58	1.76	
		M	25.8	5.8	0.40	1.00	55	33	1.00	
		S	25.8	5.8	0.42	1.00	60	33	1.00	
	IAA	B	25.8	51.4	1.26	9.03	542	293	8.88	
		M	25.8	26.9	0.96	5.73	315	153	4.64	
		S	25.8	19.6	0.83	3.92	235	112	3.39	
	IA	B	25.8	46.8	1.24	8.75	525	267	8.09	
		M	25.8	21.5	0.86	4.60	253	123	3.73	
		S	25.8	14.4	0.72	2.95	177	82	2.48	
	IB	B	25.8	42.1	1.18	7.92	475	240	7.27	
		M	25.8	14.4	0.72	3.22	177	82	2.48	
		S	25.8	9.0	0.59	1.98	119	51	1.55	
	IC	B	25.8	37.5	1.11	7.02	421	214	6.48	
		M	25.8	7.5	0.54	1.82	100	43	1.30	
		S	25.8	5.8	0.42	1.00	60	33	1.00	
LLOYD'S	1*	B	12.9	5.8	1.25	31.93	1916	66	2.00	
		M	12.9	5.8	0.55	6.75	371	66	2.00	
		S	12.9	5.8	0.55	6.18	371	66	2.00	
	1	B	12.9	5.8	0.52	5.53		66	2.00	
		M	12.9	5.8	0.50	5.58	307	66	2.00	
		S	12.9	5.8	0.50	5.12	307	66	2.00	
	2	B	12.9	5.8	0.52	5.53	332	66	2.00	
		M	25.8	5.8	0.56	1.95	107	33	1.00	
		S	25.8	5.8	0.56	1.78	107	33	1.00	
	3	B	12.9	4.8	0.50	5.12	307	55	1.67	
		M	25.8	5.8	0.40	1.00	55	33	1.00	
		S	25.8	5.8	0.42	1.00	60	33	1.00	
	IA Super IA IB IC									
		Same as ABS								
ASPPR	1	B	25.8	54.8	1.22	8.47	508	313	9.48	
		M		21.9	0.77	3.67	202	125	3.79	
		S		21.9	0.77	3.37	202	125	3.79	
	1A	B		87.7	1.54	13.60	810	501	15.18	
		M		57.0	1.24	9.55	525	325	9.85	
		S		71.2	1.39	11.00	660	406	12.30	
	2	B		131.5	1.88	20.12	1207	750	22.73	
		M		87.7	1.54	14.70	809	501	15.18	
		S		109.6	1.72	16.83	1010	626	18.97	
	3	B		175.4	2.18	27.05	1623	1001	30.33	
		M		116.2	1.77	19.45	1070	663	20.88	
		S		144.7	1.98	22.31	1339	826	25.03	
	4	B		219.2	2.43	33.60	2016	1251	37.91	
		M		144.7	1.98	24.34	1339	826	25.03	
		S		179.7	2.20	27.53	1652	1026	31.88	
	6	B		283.0	2.66	40.27	2416	1501	45.48	
		M		164.4	2.11	27.63	1520	938	28.42	
		S		206.0	2.36	31.70	1902	1176	35.64	
	7	B		306.9	2.88	47.19	2831	1752	53.09	
		M		186.3	2.24	31.14	1713	1063	32.21	
		S		230.2	2.49	35.28	2117	1314	39.82	
	8	B		328.8	2.98	50.53	3032	1877	56.88	
		M		208.2	2.37	34.87	1918	1188	36.00	
		S		263.0	2.66	40.27	2416	1501	45.48	
	10	B		328.8	2.98	50.53	3032	1877	56.88	
		M		208.2	2.37	34.87	1918	1188	36.00	
		S		263.0	2.66	40.27	2416	1501	45.48	

TABLE B-2.1 (Continued)
COMPARISON OF ICE STRENGTHENED SCANTLINGS
IN TERMS OF NORMALIZED LOAD CARRYING CAPABILITY

POLAR STAR									
RULE	CLASS	AREA	FRAME SPAC. [in]	FRAME S.M. [in ²]	PLATE THICK. [in]	P/P Rule	P _{Plate} [psi]	P _{Frame} [psi]	P/P Rule
DNV	ICE C	B	12.0	7.4	0.69	11.02	661	91	2.77
		M	25.8	5.8	0.40	1.00	55	33	1.00
		S	25.8	5.8	0.42	1.00	60	33	1.00
	ICEBREAKER	B	16.3	27.5	1.38	9.77	586	248	7.52
		M	16.3	27.5	1.11	6.89	379	248	7.52
		S	16.3	27.5	1.38	9.77	586	248	7.52
	ARCTIC ICEBREAKER	B	16.3	34.4	1.79	16.42	985	311	9.42
		M	16.3	34.4	1.44	11.60	638	311	9.42
		S	16.3	34.4	1.79	16.42	985	311	9.42
	IA ^a IA IB IC		← Same as ABS →						
BUREAU VERITAS	Glacie 1-Super	B	12.9	8.7	1.26	32.43	1946	99	3.00
		M	12.9	5.8	1.26	35.38	1946	66	2.00
		S	12.9	8.7	1.26	32.43	1946	99	3.00
	Glacie 1	B	12.9	8.7	0.60	7.35	441	99	3.00
		M	12.9	5.8	0.48	5.15	283	66	2.00
		S	12.9	8.7	0.48	4.72	283	99	3.00
	Glacie 2	B	12.9	8.7	0.60	7.35	441	99	3.00
		M	25.8	5.8	0.46	1.31	72	33	1.00
		S	25.8	5.8	0.46	1.20	72	33	1.00
	Glacie 3	B	12.9	5.1	0.50	5.12	307	58	1.76
		M	25.8	5.8	0.40	1.00	55	33	1.00
		S	25.8	5.8	0.42	1.00	60	33	1.00
	IA Super IA IB IC		← Same as ABS →						
RUSSIAN	YA	B	12.9	15.6	0.71	10.30	618	178	5.39
		M	12.9	10.1	0.54	6.51	358	115	3.48
		S	12.9	10.1	0.54	5.97	358	115	3.48
	A1	B	12.9	7.2	0.60	7.35	441	82	2.48
		M	12.9	6.3	0.50	5.58	307	72	2.18
		S	12.9	6.3	0.50	5.12	307	72	2.18
	A2	B	12.9	6.4	0.60	7.35	441	73	2.21
		M	25.8	5.8	0.46	1.31	72	33	1.00
		S	25.8	6.4	0.46	1.20	72	37	1.12
	A3	B	12.9	5.1	0.50	5.12	307	58	1.76
		M	25.8	5.8	0.40	1.00	55	33	1.00
		S	25.8	5.8	0.42	1.00	60	33	1.00
	A4	B	15.5	5.8	0.50	3.58	215	55	1.67
		M	25.8	5.8	0.40	1.00	55	33	1.00
		S	25.8	5.8	0.42	1.00	60	33	1.00
DNV	AA	B	16.0	57.1	1.20	19.33	1160	525	15.91
		M	16.0	27.5	0.88	11.35	624	253	7.67
		S	16.0	57.1	0.87	10.17	610	525	15.91
	A	B	16.0	38.1	1.01	13.70	822	351	10.64
		M	16.0	18.7	0.79	9.15	503	172	5.21
		S	16.0	38.1	0.87	10.17	610	351	10.64
	B	B	16.0	26.0	1.01	13.70	822	239	7.24
		M	25.8	5.8	0.69	2.96	163	33	1.00
		S	16.0	26.0	0.63	5.33	320	239	7.24
	C	B	16.0	12.1	0.87	10.17	610	111	3.36
		M	25.8	5.8	0.67	2.78	153	33	1.00
		S	16.0	12.1	0.42	2.77	142	111	3.36
	IA Super IA IB IC		← Same as ABS →						
PEOPLES REPUB- LIC OF CHINA	B1 ^a	B	12.9	11.6	0.72	10.60	636	132	4.00
		M	12.9	5.8	0.56	7.00	385	66	2.00
		S	12.9	11.6	0.50	5.12	307	132	4.00
	B1	B	12.9	11.6	0.60	7.35	441	132	4.00
		M	12.9	5.8	0.50	5.58	307	66	2.00
		S	12.9	11.6	0.48	4.72	283	132	4.00
	B11	B	12.9	11.6	0.56	6.42	385	132	4.00
		M	25.8	5.8	0.46	1.31	72	33	1.00
		S	25.8	5.8	0.44	1.10	66	33	1.00
	B111	B	12.9	5.8	0.50	5.12	307	66	2.00
		M	25.8	5.8	0.40	1.00	55	33	1.00
		S	25.8	5.8	0.42	1.00	60	33	1.00
	B (River Vessels)	B	12.9	3.8	0.55	6.18	371	43	1.30
		M	25.8	5.8	0.40	1.00	55	33	1.00
		S	25.8	5.8	0.42	1.00	60	33	1.00

TABLE B-2.2
COMPARISON OF ICE STRENGTHENED SCANTLINGS
IN TERMS OF NORMALIZED LOAD CARRYING CAPABILITY

M.V. ARCTIC

RULE	CLASS	AREA	FRAME SPAC. [in]	FRAME S.M. [in ²]	PLATE THICK. [in]	P/P Rule	P _{Plate} [psi]	P _{Frame} [psi]	P/P Rule
ABS	+A1	M	32.9	116.9	0.67	NA	104	146	NA
		B&S	32.9	116.9	0.60	NA	83	146	NA
	A	B	16.5	116.9	1.00	9.12	757	292	2.00
		M	16.5	116.9	0.84	5.13	534	292	2.00
		S	16.5	116.9	0.84	6.43	534	292	2.00
	B	B	16.5	116.9	1.00	9.12	757	292	2.00
		M	32.9	116.9	0.89	1.76	183	146	1.00
		S	32.9	116.9	0.77	1.65	137	146	1.00
	C	B	16.5	102.3	0.84	6.43	534	255	1.75
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.67	1.25	104	146	1.00
	IAA	B	32.9	234.2	1.57	6.85	569	293	2.01
		M	32.9	122.3	1.16	2.99	311	153	1.05
		S	32.9	116.9	1.00	2.78	231	146	1.00
	IA	B	32.9	213.2	1.50	6.27	520	267	1.83
		M	32.9	116.9	1.04	2.40	250	146	1.00
		S	32.9	116.9	0.87	2.11	175	146	1.00
	IB	B	32.9	191.8	1.43	5.69	472	240	1.64
		M	32.9	116.9	0.87	1.68	175	146	1.00
		S	32.9	116.9	0.70	1.36	113	146	1.00
	IC	B	32.9	170.8	1.35	5.07	421	214	1.47
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	83	146	1.00
LLOYD'S	1*	B	16.5	116.9	1.25	14.25	1183	292	2.00
		M	16.5	116.9	0.75	4.10	426	292	2.00
		S	16.5	116.9	0.67	4.10	340	292	2.00
	1	B	16.5	116.9	0.80	5.84	485	292	2.00
		M	16.5	116.9	0.67	3.27	340	292	2.00
		S	16.5	116.9	0.67	4.09	340	292	2.00
	2	B	16.5	116.9	0.80	5.84	485	292	2.00
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.87	2.11	175	146	1.00
	3	B	16.5	96.5	0.67	4.09	340	240	1.64
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	83	146	1.00
	IA Super								
	IA								
	IB								
	IC								
	Same as ABS								
ASPPR	1	B	32.9	249.7	1.55	6.69	555	313	2.14
		M		116.9	0.98	2.13	222	146	1.00
		S		116.9	0.98	2.67	222	146	1.00
	1A	B		399.5	1.96	10.68	887	500	3.42
		M		116.9	0.98	2.13	222	146	1.00
		S		324.6	1.77	8.72	724	406	2.78
	2	B		599.2	2.40	10.02	1330	750	5.14
		M		259.7	1.58	5.54	576	325	2.23
		S		499.4	2.19	13.34	1108	625	4.28
	3	B		799.0	2.77	21.35	1772	1000	6.85
		M		399.5	1.96	8.53	887	500	3.42
		S		659.2	2.52	17.46	1467	826	5.66
	4	B		998.7	3.10	26.73	2219	1251	8.57
		M		529.3	2.26	11.35	1180	663	4.54
		S		819.0	2.81	21.98	1824	1026	7.03
	6	B		1198.5	3.40	32.17	2670	1501	10.28
		M		659.2	2.52	14.11	1467	826	5.66
		S		938.8	3.01	25.22	2093	1176	8.05
	7	B		1398.2	3.67	37.48	3111	1751	11.99
		M		749.1	2.69	16.07	1671	938	6.42
		S		1048.7	3.18	28.14	2336	1313	8.99
	8	B		1498.1	3.80	40.18	3335	1876	12.85
		M		848.9	2.86	18.16	1889	1063	7.28
		S		1198.5	3.40	32.17	2670	1501	10.28
	10	B		1498.1	3.80	40.15	3335	1876	12.85
		M		948.8	3.02	20.26	2107	1188	8.14
		S		1198.5	3.40	32.17	2670	1501	10.28
DNV	ICE C	B	12.0	284.0	1.00	--	1402	975	6.67
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	83	146	1.00
	ICEBREAKER	B	20.5	1161.0	0.85	4.46	370	2333	15.98
		M	20.5	1161.0	0.68	2.28	237	2333	15.98
		S	20.5	1161.0	0.85	4.46	370	2333	15.98
	ARCTIC ICEBREAKER	B	20.5	1451.0	1.11	7.60	631	2916	19.97
		M	20.5	1451.0	0.98	4.72	491	2916	19.97
		S	20.5	1451.0	1.11	7.60	631	2916	19.97
	IA*								
	IA								
	IB								
	IC								
	Same as ABS								

TABLE B-2.2 (Continued)
COMPARISON OF ICE STRENGTHENED SCANTLINGS
IN TERMS OF NORMALIZED LOAD CARRYING CAPABILITY

M.V. ARCTIC

RULE	CLASS	AREA	FRAME SPAC. [in]	FRAME S.M. [in ²]	PLATE THICK. [in]	P/P Rule	P _{Plate} [psi]	P _{Frame} [psi]	P/P Rule
BUREAU VERITAS	Glacé I Super	B	16.5	175.4	1.26	14.48	1202	438	3.00
		M	16.5	116.9	1.20	10.49	1091	292	2.00
		S	16.5	175.4	1.10	11.04	916	438	3.00
	Glacé I	B	16.5	175.4	1.01	9.31	773	438	3.00
		M	16.5	116.9	0.80	4.66	485	292	2.00
		S	16.5	175.4	0.80	5.84	485	438	3.00
	Glacé II	B	16.5	175.4	1.01	9.31	773	438	3.00
		M	32.9	116.9	0.77	1.32	137	146	1.00
		S	32.9	116.9	0.77	1.65	137	146	1.00
	Glacé III	B	16.5	102.3	0.84	6.43	534	255	1.75
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	83	146	1.00
RUSSIAN	IA Super		← Same as ABS →						
	IA								
	IB								
	IC								
	YA	B	16.5	120.6	1.06	10.25	851	301	2.06
		M	16.5	120.6	0.84	5.13	534	301	2.06
		S	16.5	120.6	0.84	6.43	534	301	2.06
	A1	B	16.5	128.6	1.00	9.12	757	321	2.20
		M	16.5	116.9	0.83	5.02	522	292	2.00
		S	16.5	116.9	0.83	6.29	522	292	2.00
	A2	B	16.5	128.6	1.00	9.12	757	321	2.20
		M	32.9	116.9	0.77	1.32	137	146	1.00
		S	32.9	116.9	0.77	1.65	137	146	1.00
	A3	B	16.5	102.3	0.84	6.43	534	255	1.75
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	83	146	1.00
	A4	B	16.5	116.9	0.84	6.43	534	292	2.00
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	83	146	1.00
	AA	B	16.5	1091.0	1.44	18.92	1570	2724	18.66
		M	16.5	134.6	1.04	7.88	819	336	2.30
		S	16.5	1091.0	1.03	9.67	803	2724	18.66
	A	B	16.5	727.0	1.20	13.13	1090	1815	12.43
		M	16.5	90.2	0.94	6.43	669	225	1.54
		S	16.5	727.0	1.03	9.67	803	1815	12.43
	B	B	16.5	496.0	1.20	13.13	1090	1238	8.48
		M	32.9	116.9	0.89	1.76	183	146	1.00
		S	16.5	496.0	0.74	5.00	415	1238	8.48
	C	B	16.5	231.0	1.03	9.67	803	577	3.95
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	16.5	231.0	0.60	3.29	273	577	3.95
PEOPLES REPUB- LIC OF CHINA	IA Super		← Same as ABS →						
	IA								
	IB								
	IC								
	B1*	B	16.5	234.0	1.21	13.36	1109	584	4.00
		M	16.5	116.9	0.94	6.43	669	292	2.00
		S	16.5	234.0	0.84	6.43	534	584	4.00
	B1	B	16.5	234.0	1.00	9.12	757	584	4.00
		M	16.5	116.9	0.80	4.66	485	292	2.00
		S	16.5	234.0	0.80	5.84	485	584	4.00
	B1I	B	16.5	234.0	0.94	8.06	669	584	4.00
		M	32.9	116.9	0.74	1.21	126	146	1.00
		S	32.9	116.9	0.74	8.06	126	146	1.00
	B1II	B	16.5	116.9	0.84	6.43	534	292	2.00
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	87	146	1.00
	B (River Vessels)	B	16.5	76.0	0.76	5.26	437	190	1.30
		M	32.9	116.9	0.67	1.00	104	146	1.00
		S	32.9	116.9	0.60	1.00	83	146	1.00

TABLE B-2.3
COMPARISON OF ICE STRENGTHENED SCANTLINGS
IN TERMS OF NORMALIZED LOAD CARRYING CAPABILITY

ARCTIC TANKER									
RULE	CLASS	AREA	FRAME SPAC. [in]	FRAME S.M. [in ²]	PLATE THICK. [in]	P/P _{Rule}	P _{Plate} [psi]	P _{Frame} [psi]	P/P _{Rule}
ABS	+A1	M	39.5	38.4	1.05	NA	196	166	NA
		BBS	39.5	38.4	0.78	NA	108	166	NA
	A	B	19.8	38.4	1.00	5.03	543	332	2.00
		M	19.8	38.4	1.05	3.05	598	332	2.00
		S	19.8	38.4	1.00	5.03	543	332	2.00
	B	B	19.8	38.4	1.00	5.03	543	332	2.00
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	1.00	1.05	178	166	1.00
	C	B	19.8	33.6	1.00	5.03	543	290	1.75
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	0.78	1.00	108	166	1.00
	IAA	B		67.8	1.81	5.40	583	294	1.77
		M		38.4	1.33	1.61	315	166	1.00
		S		38.4	1.15	2.18	235	166	1.00
	IA	B		61.7	1.73	4.94	533	267	1.61
		M		38.4	1.20	1.31	256	166	1.00
		S		38.4	0.99	1.61	174	166	1.00
	IB	B		55.7	1.64	4.44	479	241	1.45
		M		38.4	1.05	1.00	196	166	1.00
		S		38.4	0.80	1.06	114	166	1.00
	IC	B		49.4	1.55	3.96	428	214	1.29
		M		38.4	1.05	1.00	196	166	1.00
		S		38.4	0.78	1.00	108	166	1.00
LLOYD'S	1*	B	19.8	38.4	1.25	7.85	848	332	2.00
		M	19.8	38.4	1.25	4.33	848	332	2.00
		S	19.8	38.4	1.15	6.65	718	332	2.00
	1	B	19.8	38.4	1.00	5.03	543	332	2.00
		M	19.8	38.4	1.05	3.05	598	332	2.00
		S	19.8	38.4	1.00	5.03	543	332	2.00
	2	B	19.8	38.4	1.00	5.03	543	332	2.00
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	1.00	1.65	178	166	1.00
	3	B	19.8	31.7	1.00	5.03	543	274	1.65
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	0.78	1.00	108	166	1.00
	IA Super								
	IA								
	IB								
	IC								
	Same as ABS								
ASPPR	1	B	39.5	106.2	2.36	9.19	992	460	2.77
		M		38.4	1.18	1.29	248	166	1.00
		S		38.4	1.18	2.30	248	166	1.00
	1A	B		159.4	2.88	13.67	1477	690	4.16
		M		69.1	1.90	3.28	643	299	1.80
		S		86.3	2.12	7.41	800	374	2.25
	2	B		212.5	3.33	18.28	1974	920	5.54
		M		106.2	2.36	5.06	992	460	2.77
		S		132.8	2.63	11.40	1231	575	3.46
	3	B		265.6	3.72	22.81	2463	1150	6.93
		M		140.8	2.71	6.67	1308	610	3.67
		S		175.3	3.03	15.14	1635	759	4.57
	4	B		318.7	4.08	27.44	2964	1380	8.31
		M		175.3	3.03	8.34	1635	759	4.57
		S		217.8	3.37	18.72	2022	943	5.68
	6	B		371.8	4.41	32.06	3462	1610	9.70
		M		199.2	3.23	9.47	1857	863	5.20
		S		249.7	3.61	21.48	2320	1081	6.51
	7	B		398.4	4.56	34.28	3702	1725	10.39
		M		225.7	3.43	10.69	2095	977	5.89
		S		278.9	3.82	24.06	2598	1208	7.28
	8	B		398.4	4.56	34.28	3702	1725	10.39
		M		252.3	3.63	11.97	2346	1093	6.58
		S		318.7	4.08	27.44	2964	1380	8.31
	10	B		398.4	4.56	34.28	3702	1725	10.39
		M		252.3	3.63	11.97	2346	1093	6.58
		S		318.7	4.08	27.44	2964	1380	8.31

TABLE B-2.3 (Continued)
COMPARISON OF ICE STRENGTHENED SCANTLINGS
IN TERMS OF NORMALIZED LOAD CARRYING CAPABILITY

ARCTIC TANKER									
RULE	CLASS	AREA	FRAME SPAC. [in]	FRAME S.M. [in ²]	PLATE THICK. [in]	P/P _{Rule}	P _{Plate} [psi]	P _{Frame} [psi]	P/P _{Rule}
DNV	ICE C	B	12.0	103.5	1.00	12.86	1389	1475	8.89
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	0.78	1.00	108	166	1.00
	ICEBREAKER	B	27.9	61.2	3.17	28.13	3038	375	2.26
		M		61.2	2.53	9.87	1935	375	2.26
		S		61.2	3.17	28.13	3038	375	2.26
	ARCTIC ICEBREAKER	B		76.5	4.12	47.51	5131	469	2.83
		M		76.5	3.29	16.69	3272	469	2.83
		S		76.5	4.12	47.51	5131	469	2.83
	IA*		Same as ABS						
	IA								
	IB								
	IC								
BUREAU VERITAS	Glacé I-Super	B	19.8	57.6	1.26	7.98	862	498	3.00
		M	19.8	38.4	1.26	4.40	862	332	2.00
		S	19.8	57.6	1.26	7.96	862	498	3.00
	Glacé I	B	19.8	57.6	1.00	5.03	543	498	3.00
		M	19.8	38.4	1.05	3.05	598	332	2.00
		S	19.8	57.6	1.00	5.03	543	498	3.00
	Glacé II	B	19.8	57.6	1.00	5.03	543	498	3.00
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	1.00	1.65	178	166	1.00
	Glacé III	B	19.8	33.6	1.00	5.03	543	290	1.75
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	1.00	1.65	178	166	1.00
B-44 USSR	IA Super		Same as ABS						
	IA								
	IB								
	IC								
	YA	B	19.8	70.5	2.02	20.50	2214	609	3.67
		M	19.8	51.8	1.39	5.35	1049	447	2.69
		S	19.8	51.8	1.39	9.71	1049	447	2.69
	A1	B	19.8	42.3	1.58	12.55	1355	365	2.20
		M	19.8	38.4	1.35	5.05	989	332	2.00
		S	19.8	38.4	1.35	9.16	989	332	2.00
	A2	B	19.8	42.3	1.00	5.03	543	365	2.20
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	1.00	1.65	178	166	1.00
	A3	B	19.8	33.6	1.00	5.03	543	290	1.75
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	0.78	1.00	108	166	1.00
B-45 NKK	AA	B	19.8	185.7	1.83	16.82	1817	1604	9.66
		M		98.7	1.31	4.75	931	853	5.14
		S		185.7	1.30	8.49	917	1604	9.66
	A	B		123.8	1.52	11.61	1254	1069	6.44
		M		66.2	1.18	3.87	756	570	3.43
		S		123.8	1.30	8.49	917	1069	6.44
	B	B		84.4	1.52	11.61	1254	729	4.39
		M	39.5	38.4	1.12	1.14	223	166	1.00
		S	19.8	84.4	0.92	4.25	459	729	4.39
	C	B	19.8	39.4	1.30	8.49	917	340	2.05
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	19.8	39.4	0.78	3.06	330	340	2.05
PEOPLES REPUBLIC OF CHINA	IA Super		Same as ABS						
	IA								
	IB								
	IC								
	BI*	B	19.8	76.8	1.26	7.98	862	663	3.99
		M	19.8	38.4	1.26	4.40	862	332	2.00
		S	19.8	76.8	1.26	7.98	862	663	3.99
	BI	B	19.8	76.8	1.00	5.03	543	663	3.99
		M	19.8	38.4	1.05	3.05	598	332	2.00
		S	19.8	76.8	1.00	5.03	543	663	3.99
	BII	B	19.8	76.8	1.00	5.03	543	663	3.99
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	1.00	1.65	178	166	1.00
PEOPLES REPUBLIC OF CHINA	BIII	B	39.5	38.4	1.00	1.65	178	166	1.00
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	0.78	1.00	108	166	1.00
	B (River Vessels)	B	19.8	25.0	0.55	1.52	164	216	1.30
		M	39.5	38.4	1.05	1.00	196	166	1.00
		S	39.5	38.4	0.78	1.00	108	166	1.00

APPENDIX B-3
TABULAR LISTING OF LOW-TEMPERATURE
STEELS AND THEIR PROPERTIES

TABLE B-3.1

STEEL TYPES USED FOR SHIPS NAVIGATING IN ICE

MATERIAL SPECIFICATION SOURCE:	REGION OF APPLICATION:				
	ICE BELT, ICE FRAMES, SHELL, WEATHER DECKS	ICE STRINGERS & OTHER ICE MEMBERS	STRUCTURE ADJ. TO SHELL & WEATHER DECKS	SUPERSTRUCT., INTERIOR STRUCTURE	SPECIAL APPLICATIONS
American Bureau of Shipping (1980)	ABS MB Grades A, B, D, E, DB, CS ABS HTS Grades AH32, DH32, EH32, AH36, DH36, EH36	Ditto	Ditto	Ditto	
Lloyd's Register of Shipping (1979) - British Classification Rules for Ships	LR MB Grades A, B, D, E, LR HTS Grades AH27S, DH27S, EH27S, AH32, DH32, EH32, AH36S, DH36S, EH36S, AH36, DH36, EH36	Ditto	Ditto	Ditto	
Det Norske Veritas (1977) - Norwegian Classification Rules for Ships	DNV MB Grades NVA, NVB, NVD, NVE DNV HTS Grades NVA27S, NVD27S, NVE27S, NVA32, NVD32, NVE32, NVA36, NVD36, NVE36, NVA40S, NVD40S, NVE40S	Ditto	Ditto	Ditto	
Bureau Veritas (1977) - French Classification Rules for Ships	BV MB Grades A, B, D, E BV HTS Grades AH32, DH32, EH32, AH36, DH36, EH36	Ditto	Ditto	Ditto	
Nippon Kaiji Kyokai (1979) - Japanese Classification Rules for Ships	KKK MB Grades KA, KB, KD, KE KKK HTS Grades KA32, KD32, KE32, KA36, KD36, KE36	Ditto	Ditto	Ditto	
Germanischer Lloyd (1980) - German Classification Rules for Ships	GL MB Grades A, B, D, E GL HTS Grades A32, D32, E32, A36, D36, E36	Ditto	Ditto	Ditto	
Specifications for USCG 480-Foot Polar Class Icebreaker	CG-A537M for plates and shapes	CG-A537M for fabricated shapes; CG-A537M, ASTM- A537 Class 1, ASTM - A537 Class 2 for rolled shapes	CG-A537M for plates, ASTM - A537 Class 1 & ASTM-A537 Class 2 for rolled shapes	ABS Steel Grades	NY-88 for flight deck and around large deck openings
Specifications for USCG 140-Foot Harbor Tug	ASTM-A537 Class 1 or 2, and ABS Grade E	ASTM-A537 Class 1 or 2, and ABS Grade E	ABS Steel Grades B, C or CS	ABS steel Grades B, C or CS	
Specifications for Nuclear Icebreaking Tanker	CG-A537M (except for shell)	CG-A537M	ABS Steel Grades (including shell)	ABS Steel Grades	

TABLE B-3.2

STEEL TYPES PROPOSED FOR SHIPS NAVIGATING IN ICE

MATERIAL SPECIFICATION SOURCE:	REGION OF APPLICATION:				
	ICE BELT, ICE FRAMES, SHELL, WEATHER DECKS	ICE STRINGERS & OTHER ICE MEMBERS	STRUCTURE ADJ. TO SHELL & WEATHER DECKS	SUPERSTRUCT., INTERIOR STRUCTURE	SPECIAL APPLICATIONS
Additional materials proposed for ice- strengthened ships as recommended by steel manufacturers	ASTM-A 710 Gr. A, Class 3	Ditto	Ditto		
	ASTM-A 633 Gr. A & B	"	"		
	ASTM-A 633 Gr. C	"	"		
	ASTM-A 633 Gr. D	"	"		
	ASTM-A 633 Gr. E	"	"		
	ASTM-A 737 Gr. B	"	"		
	ASTM-A 678 Gr. A	"	"		
	ASTM-A 678 Gr. B	"	"		
	ASTM-A 678 Gr. C	"	"		
	ABS Gr. V-039	"	"		
	ABS Gr. V-051	"	"		

TABLE B-3.3

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ABS MS Gr. A	Lloyd's Register MS Gr. A	Norske Veritas MS Gr. NVA
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, vacuum-arc remelt, or electro-slag remelt process	Open-hearth, electric-furnace, or basic-oxygen process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Any method, except rimmed steel*	Any method, except rimmed steel*	Any method, except rimmed steel*
HEAT TREATMENT	Not required	Not required	Not required
CHEMICAL COMPOSITION (Ladle Analysis - %)	Except for Gr. A shapes & bars, the carbon content + 1/6 of the manganese content is not to exceed 0.40%. If this condition is satisfied, manganese may be up to 1.65%. Carbon (max.) 0.23 Manganese 2.5 x carbon ** Phosphorus (max.) 0.04 Sulphur (max.) 0.04 Silicon Chromium Nickel Molybdenum Copper Titanium Vanadium Aluminum Others	The sum of carbon content plus 1/6 of the manganese content shall not exceed 0.40%. 0.23 2.5 x carbon ** 0.05 0.05 0.50 max.	Carbon plus 1/6 of the manganese content is not to exceed 0.40%. 0.23** 2.5 x carbon 0.04 0.04 0.15 max.
Notes:	*Rimmed steel is accepted for plates up to 12.5 mm (1/2 in). **Min. for 12.5 mm (1/2 in).	*Rimmed steel is accepted for plates up to 12.5 mm (1/2 in). **Min. for 12.5 mm (1/2 in).	*For thickn. 12.5 mm (1/2 in) rimmed steel may be accepted. **For thickn. 12.5 mm (1/2 in) a higher carbon content may be accepted upon special approval.
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 $\sqrt{A}$ mm (IN) or as noted (A=area of spec.)	41 - 50 (58 - 71) 24 (34) incl. 25 mm (1 in) 23 (32) above 25 mm (1 in) 21 in 200 mm (8 in) or 24 in 50 mm (2 in)	41 - 50 (58 - 71) 24 (34) 22	41 - 50 (58 - 71) 24 (34) incl. 25 mm (1 in) 23 (32) above 25 mm (1 in) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	None required	None required	None required
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 mm (5/8 in) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.0	1.0	1.0

TABLE B-3.3(Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Bureau Veritas MS Gr. A	MSK MS Gr. KA	German Lloyd MS Gr. A
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, or electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society
DEOXIDATION	Not reqd., but rimmed steel not above 12.5 mm (1/2 in)	Semi-killed or killed*	Any method, except rimmed steel above 12.5 mm (1/2 in)
HEAT TREATMENT	Not required	Not required	Not required
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0	0.23	0.23
Manganese	0	2.5 x C min.	2.5 x C min.*
Phosphorus (max.)	0.05	0.04	0.04
Sulphur (max.)	0.05	0.04	0.04
Silicon		0.35 max.	0.35 max.
Chromium			
Nickel			
Molybdenum			
Copper			
Titanium			
Vanadium			
Aluminum			
Others			
Notes:	*Manganese content not to be less than 2-1/2 times the carbon content for more than 12.5 mm (1/2 in).	*Rimmed steel is accepted for plates up to 12.5 mm (1/2 in) inclusive.	*Manganese content may be less below 12.5 mm (1/2 in).
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.)KG/MM ² (KSI) Elongation (min.) % in 5.65 y _A MM (IN) or as noted (A=area of spe.)	41 - 50 (58 - 71) 24 (34) 22	41 - 50 (58 - 71) 24 (34) 22	41 - 50 (58 - 71) 24 (34) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	None required	None required	None required
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 20°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.0	1.0	1.0

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ABS NS Gr. B	Lloyd's Register NS Gr. B	Norske Veritas NS Gr. NNB
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, vacuum-arc remelt, or electro-slag remelt process	Open-hearth, electric-furnace, or basic-oxygen process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Any method, except rimmed steel	Any method, except rimmed steel	Any method, except rimmed steel
HEAT TREATMENT	Not required	Not required	Not required
CHEMICAL COMPOSITION (Ladle Analysis - %)	The carbon content + 1/6 of the manganese content is not to exceed 0.40%. If this condition is satisfied, manganese may be up to 1.65%.	The sum of carbon content plus 1/6 of the manganese content shall not exceed 0.40%.	Carbon plus 1/6 of the manganese content is not to exceed 0.40%.
Carbon (max.)	0.21	0.21	0.21
Manganese	0.00 - 1.10*	0.00 min.*	0.00*
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.35 max.	0.50 max.	0.35 max.
Chromium			
Nickel			
Molybdenum			
Copper			
Titanium			
Vanadium			
Aluminum			
Others			
Notes:	*0.60 min. for fully killed or cold flanging quality.	*If silicon content is 0.10 or more, min. manganese may be 0.60.	*If silicon content is 0.10, min. manganese may be reduced to 0.60%.
TENSILE REQUIREMENTS Ultimate kg/mm^2 (ksi) Yield (min.) kg/mm^2 (ksi) Elongation (min.) % in 5.65 $\sqrt{A}$ mm (IN) or as noted (A=area of spec.)	41 - 50 (50 - 71) 24 (34) 21 in 200 mm (8 IN) or 24 in 50 mm (2 IN)	41 - 50 (50 - 71) 24 (34) 22	41 - 50 (50 - 71) 24 (34) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, kg-m (ft-lb)	Required for thicknesses above 25 mm (1 IN) only 0 2.0 (20) Longitudinal 2.0 (14) Transverse	Required for thicknesses above 25 mm (1 IN) only 0 2.0 (20) Longitudinal	0 2.0 (20) Longitudinal 2.0 (14) Transverse
NOT TEMPERATURE °C	+10 to + 16		
DYNAMIC TEAR ENERGY IN kg-m (ft-lb) AT 24°C FOR 16 mm (5/8 IN) THICK SPECIMEN	46 (333)		
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.015	1.015	1.015

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Bureau Veritas MS Gr. B	NKK MS Gr. B3	German Lloyd MS Gr. B
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, or electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society
DEOXIDATION	Rimmed steel not to be used	Semi-killed or killed	Any method, except rimmed steel
HEAT TREATMENT	Not required	Not required	Not required
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.21	0.21	0.21
Manganese	0.08 - 1.00	0.08 min.	0.08 min.
Phosphorus (max.)	0.05	0.04	0.04
Sulphur (max.)	0.05	0.04	0.04
Silicon	0.35 max.	0.35 max.	0.35 max.
Chromium			
Nickel			
Molybdenum			
Copper			
Titanium			
Vanadium			
Aluminum			
Others			
Notes:			
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 x 1/2 in (14 in) or as noted (A=area of spec.)	41 - 50 (50 - 71) 24 (34) 22	41 - 50 (50 - 71) 24 (34) 22	41 - 50 (50 - 71) 24 (34) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	None required	0 2.0 (20) Longitudinal 2.1 (15) Transverse	0 2.0 (20) Longitudinal
WTT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE YIELD POINT (Based on MS Grade A)	1.015	1.015	1.015

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ABS MS Gr. DS	ABS NYS Gr. AN32	Lloyd's Register NYS Gr. AN27B
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, vacuum-arc remelt, or electro-slag remelt process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, electric-furnace, or basic-oxygen process
DEOXIDATION	Fully killed, fine grain practice	Semi-killed or killed	Semi-killed or silicon-killed
HEAT TREATMENT	Normalized	Normd.above 35 MM(1.38 IN) Normd.above 12.5MM(1/2IN)**	Normd.above 35 MM(1.38 IN)*
CHEMICAL COMPOSITION (Ladle Analysis - %)	The carbon content + 1/6 of the manganese content is not to exceed 0.40%. If this condition is satisfied, manganese may be up to 1.65%.		
Carbon (max.)	0.16	0.18	0.18
Manganese	1.0 - 1.35	0.90 - 1.60***	0.70 - 1.63
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.35	0.10 - 0.50	0.05 max.
Chromium		0.25 max.	0.20 max.
Nickel		0.40 max.	0.40 max.
Molybdenum		0.08 max.	0.08 max.
Copper		0.35 max.	0.35 max.
Titanium			
Vanadium		0.10 max.	0.03 - 0.10
Aluminum			0.015 min.
Others		0.05 max. Cb	0.015 - 0.05 Nb
Notes:		*If aluminum-treated. **If columbium or vanadium practice used. ***12.5 MM (1/2 IN) and under may have min. manganese of 0.70%.	*Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.)KG/MM ² (KSI) Elongation (min.) % in 5.65 X MM (IN) or as noted (A=area of gage.)	41 - 50 (58 - 71) 24 (34) 21 in 200 MM (8 IN) or 24 in 50 MM (2 IN)	48 - 60 (68 - 85) 32 (45.5) 19 in 200 MM (8 IN) or 22 in 50 MM (2 IN)	41 - 52 (58 - 74) 27 (38.5) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	None required	None required	Required for thicknesses above 12.5 MM (1/2 IN) only 0 2.8 (20) Longitudinal
NOT TEMPERATURE °C		-12 to -7	
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN		14 (101)	
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	135 - 170	110 - 147
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Moderate preheat for welding. Low hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.00	1.11	1.11

TABLE B-3.3 (Continued)
PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Lloyd's Register NTS Gr. A332	Norske Veritas NTS Gr. NVA 278	Norske Veritas NTS Gr. NVA32
PROCESS OF MANUFACTURE	Open-hearth, electric-furnace, or basic-oxygen process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Semi-killed or silicon-killed	Semi-killed or fully killed	Fully killed
HEAT TREATMENT	Normd. above 35 MM (1.38 IN)	Not required	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.20	0.18
Manganese	0.70 - 16.0	0.70 min.	0.9 - 1.6*
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.05 max.		0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.03 - 0.10	0.10 max.	0.10 max.
Aluminum	0.015 min.	0.08 max.	0.08 max.
Others	0.015 - 0.05 Nb	0.05 max. Nb	0.05 max. Nb
Notes:	*Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.		*0.70 min. may be used for 12.5 MM (1/2 IN) and less.
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spec.)	45 - 60 (64 - 85) 32 (45.5) 22	41 - 52 (58 - 74) 27 (38.5) 22	45 - 60 (64 - 85) 32 (45.5) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	Required for thicknesses above 12.5 MM (1/2 IN) only 0 3.16 (23) Longitudinal	None required	0 3.16 (23) Longitudinal 2.24 (16) Transverse
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	125 - 170	110 - 147	125 - 170
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.
COEFFICIENT OF THERMAL EXPANSION (Based on AISI Grade A)	1.11	1.11	1.11

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Bureau Veritas NTS Gr. A32	NKK NTS Gr. KA32	German Lloyd NTS Gr. A32
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace or any equivalent approved by the society	Open-hearth, basic-oxygen, or electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace or any equivalent approved by the society
DEOXIDATION	Unrimmed steel, killed above 12.5 MM (1/2 IN)	Killed	Killed
HEAT TREATMENT	Not required*	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.10	0.18
Manganese	0.70 - 1.60 **	0.90 - 1.60	0.90 - 1.60*
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.05 max. ***	0.10 - 0.50	0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.		
Aluminum	0.06 max.	0.015 min.	0.07 max.
(Others)	0.05 max. Nb		
Notes:	*Not required, if aluminum or vanadium treated. **0.90-1.60 above 12.5 MM (1/2 IN). ***0.10-0.50 above 12.5 MM (1/2 IN).		*Minimum is 0.70 below 12.5 MM (1/2 IN).
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spec.)	45 - 60 (64 - 85) .32 (45.5) 20	48 - 60 (68 - 85) 32 (45.5) 22	48 - 60 (68 - 85) 32 (45.5) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	None required	0 3.2 (23) Longitudinal 2.3 (17) Transverse	0 3.2 (23) Longitudinal 2.2 (16) Transverse
WIT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	125 - 170	135 - 170	125 - 170
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.11	1.11	1.11

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ABS NTS Gr. AN36	Lloyd's Register NTS Gr. AN345	Lloyd's Register NTS Gr. AN36
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, electric- furnace, or basic-oxygen process	Open-hearth, electric- furnace, or basic-oxygen process
DEOXIDATION	Semi-killed or killed	Semi-killed or silicon- killed	Semi-killed or silicon- killed
HEAT TREATMENT	Normd.above 35 MM(1.38 IN) Normd.above 12.5MM(1/2IN)**	Normd.above 35 MM(1.38 IN) Normd.above 12.5MM(1/2IN)**	Normd.above 35 MM(1.38 IN) Normd.above 12.5MM(1/2IN)**
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.90 - 1.60***	0.70 - 1.60	0.70 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.05 max.	0.05 max.
Chromium	0.25 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.	0.03 - 0.10	0.03 - 0.10
Aluminum		0.015 min.	0.015 min.
Others	0.05 max. Ch	0.015 - 0.05 Nb	0.015 - 0.05 Nb
Notes:	*If aluminum treated. **If columbium or vanadium practice used. ***12.5 MM (1/2 IN) and under may have min. manganese of 0.70%.	*Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.	*Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	50 - 63 (71 - 90)	62 (88)	50 - 63 (71 - 90)
Yield (min.)KG/MM ² (KSI)	36 (51)	34 (48)	36 (51)
Elongation (min.) % in 5.65 (A) MM (IN) or as noted (A=area of spe.)	19 in 200 MM (8 IN) or 22 in 50 MM (2 IN)	22	21
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	None required	Required for thicknesses above 12.5 MM (1/2 IN) only	Required for thicknesses above 12.5 MM (1/2 IN) only
Energy, KG-M (FT-LB)		0 3.47 (25) Longitudinal	0 3.47 (25) Longitudinal
NDT TEMPERATURE °C	-12 to -7		
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	140 - 181	177	140 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.17	1.17	1.17

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Norske Veritas HTS Gr. NVA 36	Norske Veritas HTS Gr. NVA40S	Bureau Veritas HTS Gr. AN36
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society
DEOXIDATION	Fully killed	Fully killed	Unrimmed steel, killed above 12.5 MM (1/2 IN)
HEAT TREATMENT	Not required	Normd. above 12.5 MM (1/2 IN)	Not required*
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.9 - 1.6*	0.9 - 1.6*	0.70 - 1.60**
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.10 - 0.50	0.50 max.***
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.	0.10 max.	0.10 max.
Aluminum	0.08 max.	0.08 max.	0.06 max.
Others	0.05 max. Nb	0.05 max. Nb	0.05 max. Nb
Notes:	*0.70 min. may be used for 12.5 MM (1/2 IN) and less.	*0.70 min. may be used for 12.5 MM (1/2 IN) and less.	*Not required if aluminum or vanadium treated. **0.90-1.60 above 12.5 MM (1/2 IN). ***0.10-0.50 above 12.5 MM (1/2 IN).
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	50 - 63 (71 - 90)	54 - 66 (77 - 94)	50 - 63 (71 - 90)
Yield (min.) KG/MM ² (KSI)	36 (51)	40 (57)	36 (51)
Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spe.)	21	20	20
CHARPY V-NOTCH IMPACT TEST			None required
Temperature °C	0	0	
Energy, KG-M (FT-LB)	3.47 (25) Longitudinal 2.45 (18) Transverse	4.0 (29) Longitudinal 2.65 (19) Transverse	
NDT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	140 - 181	153 - 190	140 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE TENSILE FACTOR (Based on ABS Grade A)	1.17	1.17	1.17

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	NKK NTS Gr. KA36	German. Lloyd NTS Gr. A36	ABS MS Gr. D
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, electric-furnace, vacuum-arc remelt, or electro-slag remelt process
DEOXIDATION	Killed	Killed	Fully killed, fine grain practice
HEAT TREATMENT	Normalized	Normalized	Normd.above 35 MM (1.38 IN)
CHEMICAL COMPOSITION (Ladle Analysis - %)			The carbon content + 1/6 of the manganese content is not to exceed 0.40%. If this condition is satisfied, manganese may be up to 1.65%.
Carbon (max.)	0.18	0.18	0.21
Manganese	0.90 - 1.60	0.90 - 1.60*	0.70 - 1.35*
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.10 - 0.50	0.10 - 0.35
Chromium	0.20 max.	0.20 max.	
Nickel	0.40 max.	0.40 max.	
Molybdenum	0.08 max.	0.08 max.	
Copper	0.35 max.	0.35 max.	
Titanium			
Vanadium	0.10 max.	0.10 max.	
Aluminum	0.015 min.	0.07 max.	
Others	0.05 max. Nb	0.05 max. Nb	
Notes:		*Minimum is 0.70 below 12.50 MM (1/2 IN).	*0.60 min. for 25 MM (1 IN) thickness and under.
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.)KG/MM ² (KSI) Elongation (min.) % in 5.65 yA ² MM (IN) or as noted (A=area of spe.)	50 - 63 (71 - 90) 36 (51) 21	50 - 63 (71 - 90) 36 (51) 21	41 - 50 (58 - 71) 24 (34) 21 in 200 MM (8 IN) or 24 in 50 MM (2 IN)
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	0 3.5 (25) Longitudinal 2.5 (18) Transverse	0 3.5 (25) Longitudinal 2.4 (17) Transverse	-10 2.8 (20) Longitudinal 2.0 (14) Transverse
NOT TEMPERATURE °C			-35 aver.
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	140 - 181	140 - 181	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.17	1.17	1.31

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ABS MS Gr. CS	Lloyd's Register MS Gr. D	Norake Veritas MS Gr. NVD
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, vacuum-arc remelt, or electro-slag remelt process	Open-hearth, electric-furnace, or basic-oxygen process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Fully killed, fine grain practice	Fully killed, fine grain practice	Any method except rimmed steel
HEAT TREATMENT	Normalized	Normalized	Normalized above 25 MM (1 IN)*
CHEMICAL COMPOSITION (Lab's Analysis - %)	The carbon content + 1/6 of the manganese content is not to exceed 0.40%. If this condition is satisfied, manganese may be up to 1.65%.	The sum of carbon content plus 1/6 of the manganese content shall not exceed 0.40%.	Carbon plus 1/6 of the manganese content is not to exceed 0.40%
Carbon (max.)	0.16	0.21	0.21
Manganese	1.0 - 1.35	0.70 - 1.40*	0.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.35	0.10 - 0.50 max.	0.35 max.
Chromium			
Nickel			
Molybdenum			
Copper			
Titanium			
Vanadium			
Aluminum			
Others			
Notes:		*For 25.5 MM (1 IN) or less, min. manganese may be 0.60.	*With fine grain practice, normalizing is only required for thicknesses above 35 MM (1.38 IN).
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	41 - 50 (58 - 71)	41 - 50 (58 - 71)	41 - 50 (58 - 71)
Yield (min.) KG/MM ² (KSI)	24 (34)	24 (34)	24 (34)
Elongation (min.) % in 5.65 A MM (IN) or as noted (A=area of spe.)	21 in 200 MM (8 IN) or 24 in 50 MM (2 IN)	22	22
CHARPY V-NOTCH IMPACT TEST	None required		
Temperature °C		0	-10
Energy, KG-M (FT-LB)		4.8 (35) Longitudinal	2.75 (20) Longitudinal 2.0 (14) Transverse
MINI TEMPERATURE °C	-57 to -51		
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN	98 (709)		
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.11	1.11	1.11

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Bureau Veritas MS Gr. D	NEK MS Gr. ED	German. Lloyd MS Gr. D
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society
DEOXIDATION	Rimmed steel not be used	Semi-killed or killed*	Any method, except rimmed steel*
HEAT TREATMENT	Not required	Normalized above 25 mm (1 IN)	Normalized above 25.5 mm (1 IN)
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.21	0.21	0.21
Manganese	0.60 - 1.40	0.60 min.	0.70 - 1.40
Phosphorus (max.)	0.05	0.04	0.04
Sulphur (max.)	0.05	0.04	0.04
Silicon	0.35 max.	0.35 max.	0.10 - 0.35
Chromium			
Nickel			
Molybdenum			
Copper			
Titanium			
Vanadium			
Aluminum			0.02 min.
Others			
Notes:		*Semi-killed is accepted for thickness up to 25 mm (1 IN) inclusive.	*Aluminum treated and fine grain practice above 25.5 mm (1 IN).
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 gR mm (IN) or as noted (A=area of spe.)	41 - 50 (50 - 71) 24 (34) 22	41 - 50 (50 - 71) 24 (34) 22	41 - 50 (50 - 71) 24 (34) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	0 4.8 (35) Longitudinal	-10 2.8 (20) Longitudinal 2.1 (15) Transverse	-20 2.8 (20) Longitudinal
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 mm (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE DUCT FACTOR (Based on ARS Grade A)	1.31	1.31	1.31

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ABS MS Gr. E	Lloyd's Register MS Gr. E	Norake Veritas MS Gr. NVE
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, vacuum-arc remelt, or electro-slag remelt process	Open-hearth, electric-furnace, or basic-oxygen process	Open-hearth, basic-oxygen, or electric-furnace process
DEORIDATION	Fully killed, fine grain practice	Fully killed, fine grain practice	Fully killed, fine grain practice
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)	The carbon content + 1/6 of the manganese content is not to exceed 0.40%. If this condition is satisfied, manganese may be up to 1.65%.	The sum of carbon content plus 1/6 of the manganese content shall not exceed 0.40%.	Carbon plus 1/6 of the manganese content is not to exceed 0.40%.
Carbon (max.)	0.18	0.18	0.18
Manganese	0.70 - 1.35	0.70 - 1.50	0.70
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.35	0.10 - 0.50	0.10 - 0.35
Chromium			
Nickel			
Molybdenum			
Copper			
Titanium			
Vanadium			
Aluminum		0.015 min.	0.015 min.
Others			
Notes:			
TENSILE REQUIREMENTS			
Ultimate KG/MM^2 (KSI)	41 - 50 (58 - 71)	41 - 50 (58 - 71)	41 - 50 (58 - 71)
Yield (min.) KG/MM^2 (KSI)	24 (34)	24 (34)	24 (34)
Elongation (min.) % in 5.65 $\sqrt{A}$ mm (IN) or as noted (A=area of spe.)	21 in 200 mm (8 IN) or 24 in 50 mm (2 IN)	22	22
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-40	-40	-40
Energy, KG-M (FT-LB)	2.8 (20) Longitudinal 2.0 (14) Transverse	2.75 (20) Longitudinal	2.75 (20) Longitudinal 2.0 (14) Transverse
NOT TEMPERATURE °C	-48 to -46		
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE TOST FACTOR (Based on ABS Grade A)	1.36	1.36	1.36

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Bureau Veritas MS Gr. E	NER MS Gr. KE	German Lloyd MS Gr. E
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society
DEOXIDATION	Fully killed, fine grain	Killed*	Aluminum treated, fine grain practice
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.70 - 1.50	0.70 min.	0.70 - 1.50
Phosphorus (max.)	0.05	0.04	0.04
Sulphur (max.)	0.05	0.04	0.04
Silicon	0.10 - 0.35	0.10 - 0.35	0.10 - 0.35
Chromium			
Nickel			
Molybdenum			
Copper			
Titanium			
Vanadium			
Aluminum	0.015 - 0.06	0.015 min.	0.02 min.
Others			
Notes:		*Aluminum treatment is to be used as a fine grain practice.	
TENSILE REQUIREMENTS			
Ultimate KG/MM^2 (KSI)	41 - 50 (58 - 71)	41 - 50 (58 - 71)	41 - 50 (58 - 71)
Yield (min.) KG/MM^2 (KSI)	24 (34)	24 (34)	24 (34)
Elongation (min.) % in 5.65 (A) MM (IN) or as noted (A=area of spec.)	22	22	22
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-40	-40	-40
Energy, KG-M (FT-LB)	2.8 (20) Longitudinal	2.8 (20) Longitudinal 2.1 (15) Transverse	2.8 (20) Longitudinal
HUT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 140	110 - 140	110 - 140
REQUIRED WELDING AND FABRICATION TECHNIQUES	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.	Conventional welding methods. No preheating. Normal forming and cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.36	1.36	1.36

TABLE 8-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ABS HTS Gr. DH22	ABS HTS Gr. DH36	Lloyd's Register HTS Gr. DH27S
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, electric- furnace, or basic-oxygen process
DEOXIDATION	Killed, fine grain practice	Killed, fine grain practice	Semi-killed or silicon- killed
HEAT TREATMENT	Normd.above 25.5 MM (1 IN)* Normd.above 12.5MM (1/2IN)**	Normd.above 25.5 MM (1 IN)* Normd.above 12.5MM (1/2IN)**	Normd.above 25.5 MM (1 IN)*
CHEMICAL COMPOSITION (Lable Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.90 - 1.60	0.90 - 1.60	0.70 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.10 - 0.50	0.05 max.
Chromium	0.25 max.	0.25 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.	0.10 max.	0.03 - 0.10
Aluminum			0.015 min.
Others	0.05 max. Cb	0.05 max. Cb	0.015 - 0.05 Nb
Notes:	*If aluminum treated. **If columbium or vanadium practice is used.	*If aluminum treated. **If columbium or vanadium practice is used.	*Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spe.)	48 - 60 (68 - 85) 32 (45.5) 19 in 200 MM (8 IN) or 22 in 50 MM (2 IN)	50 - 63 (71 - 90) 36 (51) 19 in 200 MM (8 IN) or 22 in 50 MM (2 IN)	41 - 52 (58 - 74) 27 (38.5) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	-20 3.5 (25) Longitudinal 2.4 (17) Transverse	-20 3.5 (25) Longitudinal 2.4 (17) Transverse	-20 2.75 (20) Longitudinal
WVT TEMPERATURE °C	-62 to -40	-62 to -40	
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	135 - 170	140 - 181	110 - 147
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.38	1.18	1.18

TABLE D-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Lloyd's Register NTS Gr. DH32	Lloyd's Register NTS Gr. DH34E	Lloyd's Register NTS Gr. DH36
PROCESS OF MANUFACTURE	Open-hearth, electric-furnace, or basic-oxygen process	Open-hearth, electric-furnace, or basic-oxygen process	Open-hearth, electric-furnace, or basic-oxygen process
DEOXIDATION	Semi-killed or silicon-killed	Semi-killed or silicon-killed	Semi-killed or silicon-killed
HEAT TREATMENT	Normd.above 25.5 MM (1 IN) ^a	Normd.above 25.5 MM (1 IN) ^a	Normd.above 25.5 MM (1 IN) ^a
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.90 - 1.60	0.90 - 1.60	0.90 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.05 max.	0.05 max.	0.05 max.
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.03 - 0.10	0.03 - 0.10	0.03 - 0.10
Aluminum	0.015 min.	0.015 min.	0.015 min.
Others	0.015 - 0.05 Nb	0.015 - 0.05 Nb	0.015 - 0.05 Nb
Notes:	^a Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.	^a Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.	^a Above 12.5 MM (1/2 IN), if niobium or aluminum + niobium practice is used.
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	45 - 60 (64 - 85)	62 (88)	50 - 63 (71 - 90)
Yield (min.)KG/MM ² (KSI)	32 (45.5)	34 (48)	36 (51)
Elongation (min.) % in 5.65 (A) MM (IN) or as noted (A=area of spe.)	22	22	21
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-20	-20	-20
Energy, KG-M (FT-LB)	3.16 (23) Longitudinal	3.47 (25) Longitudinal	3.47 (25) Longitudinal
MDT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	125 - 170	177	140 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.38	1.38	1.38

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Morske Veritas NTS Gr. MVD278	Morske Veritas NTS Gr. MVD32	Morske Veritas NTS Gr. MVD36
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEORIENTATION	Semi-killed or fully killed*	Fully killed	Fully killed
HEAT TREATMENT	Normd.above 25.5 MM (1 IN)**	Normd.above 19 MM (3/4 IN)*	Normd.above 19 MM (3/4 IN)*
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.70 min.	0.9 - 1.6	0.9 - 1.6
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon		0.10 - 0.50	0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.	0.10 max.	0.10 max.
Aluminum	0.08 max.	0.08 max.	0.08 max.
Others	0.05 max. Nb	0.05 max. Nb	0.05 max. Nb
Notes:	*For 25.5 MM (1 IN) and above to be killed and fine grain treated. **Above 12.5 MM (1/2 IN), if niobium practice is used.	*Above 12.5 MM (1/2 IN), if niobium practice is used.	*Above 12.5 MM (1/2 IN), if niobium practice is used.
TENSILE REQUIREMENTS			
Ultimate KG/MM^2 (KSI)	41 - 52 (58 - 74)	45 - 60 (64 - 85)	50 - 63 (71 - 90)
Yield (min.) KG/MM^2 (KSI)	27 (38.5)	32 (45.5)	36 (51)
Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spe.)	22	22	21
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-20	-20	-20
Energy, KG-M (FT-LB)	2.75 (20) Longitudinal 2.0 (14) Transverse	3.16 (23) Longitudinal 2.24 (16) Transverse	3.47 (25) Longitudinal 2.45 (18) Transverse
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 147	125 - 170	140 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.30	1.30	1.30

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Norsk Veritas NTS Gr. MVD40S	Bureau Veritas NTS Gr. DM32	Bureau Veritas NTS Gr. DM36
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society
DEOXIDATION	Fully killed	Killed, fine grain	Killed, fine grain
HEAT TREATMENT	Normalized	Normalized*	Normalized*
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.9 - 1.6	0.90 - 1.60	0.90 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.10 - 0.50	0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.	0.10 max.	0.05 - 0.10
Aluminum	0.08 max.	0.015 - 0.06	0.015 - 0.06
Others	0.05 max. Nb	0.05 max. Nb	0.02 - 0.05 Nb
Notes:		*Not required, if properties can be met as specified.	*Not required, if properties can be met as specified.
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 in (14.6 mm) or as noted (A=area of spe.)	54 - 64 (77 - 94) 40 (57) 20	45 - 60 (64 - 85) 32 (45.5) 20	50 - 63 (71 - 90) 36 (51) 20
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	-20 4.0 (29) Longitudinal 2.65 (19) Transverse	-20 3.16 (23) Longitudinal	-20 3.5 (25) Longitudinal
NDT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN W-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	153 - 190	125 - 170	140 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.38	1.38	1.38

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	NKK NTS Gr. KD32	NKK NTS Gr. KD36	German. Lloyd NTS Gr. D32
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society
DEOXIDATION	Killed	Killed	Killed
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.90 - 1.60	0.90 - 1.60	0.90 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.10 - 0.50	0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium		0.05 - 0.10	0.02 - 0.07
Aluminum	0.015 min.	0.015 min.	
Others		0.02 - 0.05 Mb	
Notes:			
TENSILE REQUIREMENTS Ultimate KG/MM ² (BSI) Yield (min.) KG/MM ² (BSI) Elongation (min.) % in 5.65 (A) MM (IN) or as noted (A=area of spec.)	48 - 60 (68 - 85) 32 (45.5) 22	50 - 63 (71 - 90) 36 (51) 21	48 - 60 (68 - 85) 32 (45.5) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	-20 3.2 (23) Longitudinal 2.3 (17) Transverse	-20 3.5 (25) Longitudinal 2.5 (18) Transverse	-20 3.2 (23) Longitudinal 2.2 (16) Transverse
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	135 - 170	140 - 181	135 - 170
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI grade A)	1.18	1.18	1.18

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	German. Lloyd NTS GR. D36	ASTM-A537 Class 1	ASTM-A633 Gr. D
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Killed	Fine grain practice	Fine grain practice
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.24	0.20
Manganese	0.90 - 1.60	0.70 - 1.35	0.70 - 1.35
Phosphorus (max.)	0.04	0.035	0.04
Sulphur (max.)	0.04	0.040	0.05
Silicon	0.10 - 0.50	0.15 - 0.50	0.15 - 0.50
Chromium	0.20 max.	0.25 max.	0.25 max.
Nickel	0.40 max.	0.25 max.	0.25 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.05 - 0.10		
Aluminum	0.02 - 0.07		
Others	0.02 - 0.05 Nb		
Notes:			
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 (A) MM (IN) or as noted (A=area of spe.)	50 - 63 (71 - 90) 36 (51) 21	49 - 63 (70 - 90) 35 (50) 22 in 51 MM (2 IN)	49 - 63 (70 - 90) 35 (50) 23 in 51 MM (2 IN)
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	-20 3.5 (25) Longitudinal 2.4 (17) Transverse	-60 2.1 (15) Longitudinal	-40 3.5 (25) Longitudinal 2.8 (20) Transverse
MIN. TEMPERATURE °C		-51 to -18	-51 aver.
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	140 - 181	138 - 181	138 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Controlled welding process. Moderate preheat. Low-hydrogen practice. Normal forming & cutting practice.	Controlled welding process. Moderate preheat. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI grade A)	1.38	1.38	1.38

TABLE B-2.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ASTM-A633 Gr. A & B	ABS NTE Gr. EH32	ABS NTE Gr. EH36
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Fine grain practice	Killed, fine grain practice	Killed, fine grain practice
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	1.00 - 1.35	0.90 - 1.50	0.90 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.05	0.04	0.04
Silicon	0.15 - 0.50	0.10 - 0.50	0.10 - 0.50
Chromium		0.25 max.	0.25 max.
Nickel		0.40 max.	0.40 max.
Molybdenum		0.08 max.	0.08 max.
Copper		0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.*	0.10 max.	0.10 max.
Aluminum			
Others	0.05 max. Ch**	0.05 max. Ch	0.05 max. Ch
Notes:	*Gr. B only. **Gr. A only.		
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	44 - 58 (63 - 83)	48 - 60 (68 - 85)	50 - 63 (71 - 90)
Yield (min.) KG/MM ² (KSI)	30 (43)	32 (45.5)	36 (51)
Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spe.)	23 in 51 MM (2 IN)	19 in 200 MM (8 IN) or 22 in 50 MM (2 IN)	19 in 200 MM (8 IN) or 22 in 50 MM (2 IN)
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-46	-40	-40
Energy, KG-M (FT-LB)	3.5 (25) Longitudinal 2.0 (20) Transverse	3.5 (25) Longitudinal 2.4 (17) Transverse	3.5 (25) Longitudinal 2.4 (17) Transverse
NDT TEMPERATURE °C	-57 aver.	-51 to -40	-51 to -40
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN		91 (658)	
ABRASION RESISTANCE AS BRINELL HARDNESS	121 - 165	135 - 170	140 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Preheat required, if ambient temp. below 16°C. Low-hydrogen practice. Normal forming & cutting practice	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE TEST FACTOR (Based on ABS Grade A)	1.40	1.43	1.41

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Lloyd's Register MTS Gr. EH276	Lloyd's Register MTS Gr. EH32	Lloyd's Register MTS Gr. EH34S
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Silicon-killed only	Silicon-killed only	Silicon-killed only
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.70 - 1.60	0.90 - 1.60	0.90 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 min.	0.10 min.	0.10 min.
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.03 - 0.10	0.03 - 0.10	0.03 - 0.10
Aluminum	0.015 min.	0.015 min.	0.015 min.
Others	0.015 - 0.05 Nb	0.015 - 0.05 Nb	0.015 - 0.05
Notes:			
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	41 - 52 (58 - 74)	45 - 60 (64 - 85)	62 (88)
Yield (min.) KG/MM ² (KSI)	27 (38.5)	32 (45.5)	34 (48)
Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spe.)	22	22	22
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-40	-40	-40
Energy, KG-M (FT-LB)	2.75 (20) Longitudinal	3.16 (23) Longitudinal	3.47 (25) Longitudinal
NDT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	110 - 147	125 - 170	177
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI grade A)	1.41	1.41	1.41

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Lloyd's Register NTS Gr. SH36	Norske Veritas NTS Gr. NVE27S	Norske Veritas NTS Gr. NVE32
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Silicon-killed only	Fully killed	Fully killed
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.70 - 1.60	0.70 min.	0.9 - 1.6
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 min.	0.10 - 0.50	0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.03 - 0.10	0.10 max.	0.10 max.
Aluminum	0.015 min.	0.38 max.	0.08 max.
Others	0.01 - 0.05 Nb	0.05 max. Nb	0.05 max. Nb
Notes:			
TENSILE REQUIREMENTS			
Ultimate KG/MM^2 (KSI)	50 - 63 (71 - 90)	41 - 54 (58 - 77)	45 - 60 (64 - 85)
Yield (min.) KG/MM^2 (KSI)	36 (51)	27 (38.5)	32 (45.5)
Elongation (min.) % in 5.65 mm (IN) or as noted (A=area of spe.)	21	22	22
CHARPY V-NOTCH IMPACT TEST			
Temperature $^{\circ}\text{C}$	-40	-40	-40
Energy, KG-M (FT-LB)	3.47 (25) Longitudinal	2.75 (20) Longitudinal 2.0 (14) Transverse	3.16 (23) Longitudinal 2.24 (16) Transverse
NOT TEMPERATURE $^{\circ}\text{C}$			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 mm (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	140 - 181	110 - 153	125 - 170
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on ABS Grade A)	1.43	1.43	1.43

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Norske Veritas NTS Gr. NVE36	Norske Veritas NTS Gr. NVE40S	Bureau Veritas NTS Gr. EM32
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society
DEOXIDATION	Fully killed	Fully killed	Killed, fine grain
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.9 - 1.6	0.09 - 1.6	0.09 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.10 - 0.50	0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.10 max.	0.10 max.	0.10 max.
Aluminum	0.08 max.	0.08 max.	0.015 - 0.06
Others	0.05 max. Nb	0.05 max. Nb	0.05 max. Nb
Notes:			
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 $\sqrt{A}$ MM (IN) or as noted (A=area of spe.)	50 - 63 (71 - 90) 36 (51) 21	54 - 66 (77 - 94) 40 (57) 20	45 - 60 (64 - 85) 32 (45.5) 20
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	-40 3.47 (25) Longitudinal 2.45 (18) Transverse	-40 4.0 (29) Longitudinal 2.65 (19) Transverse	-40 3.16 (23) Longitudinal
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	140 - 181	153 - 190	125 - 170
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.43	1.43	1.43

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	Bureau Veritas HTS Gr. SH36	NKK HTS Gr. KE32	NKK HTS Gr. KE36
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society	Open-hearth, basic-oxygen, electric-furnace process, or other approved by the society
DEoxidATION	Killed, fine grain	Killed	Killed
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.18
Manganese	0.90 - 1.60	0.90 - 1.60	0.90 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.04
Silicon	0.10 - 0.50	0.10 - 0.50	0.10 - 0.50
Chromium	0.20 max.	0.20 max.	0.20 max.
Nickel	0.40 max.	0.40 max.	0.40 max.
Molybdenum	0.08 max.	0.08 max.	0.08 max.
Copper	0.35 max.	0.35 max.	0.35 max.
Titanium			
Vanadium	0.05 - 0.10		0.05 - 0.10
Aluminum	0.015 - 0.06	0.015 min.	0.015 min.
Others	0.02 - 0.05 Nb		0.02 - 0.05 Nb
Notes:			
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 (1/8) IN or as noted (A=area of spe.)	50 - 63 (71 - 90) 36 (51) 20	48 - 60 (68 - 85) 32 (45.5) 22	50 - 63 (71 - 90) 36 (51) 21
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	-40 3.5 (25) Longitudinal	-40 3.2 (23) Longitudinal 2.3 (17) Transverse	-40 3.5 (25) Longitudinal 2.5 (18) Transverse
NOT TEMPERATURE °C			
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	140 - 181	135 - 170	140 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE TENSILE FACTOR (Based on AWS Grade A)	1.43	1.43	1.43

TABLE B-3.3(Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	German. Lloyd NTS Gr. E32	German. Lloyd NTS Gr. E36	ASTM-A633 Gr. C
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, electric-furnace, or any equivalent approved by the society	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Killed	Killed	Fine grain practice
HEAT TREATMENT	Normalized	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.18	0.18	0.20
Manganese	0.90 - 1.60	0.90 - 1.60	1.15 - 1.50
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.04	0.04	0.05
Silicon	0.10 - 0.50	0.10 - 0.50	0.15 - 0.50
Chromium	0.20 max.	0.20 max.	
Nickel	0.40 max.	0.40 max.	
Molybdenum	0.08 max.	0.08 max.	
Copper	0.35 max.	0.35 max.	
Titanium			
Vanadium			
Aluminum	0.02 - 0.07	0.05 - 0.10	
Others		0.02 - 0.07 0.02 - 0.05 Nb	0.01 - 0.05 Cb
Notes:			
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	48 - 60 (68 - 85)	50 - 63 (71 - 90)	49 - 63 (70 - 90)
Yield (min.)KG/MM ² (KSI)	32 (45.5)	36 (51)	35 (50)
Elongation (min.) % in 5.65 "A" MM (IN) or as noted (A=area of spe.)	22	21	23 in 51 MM (2 IN)
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-40	-40	-46
Energy, KG-M (FT-LB)	3.2 (23) Longitudinal 2.4 (17) Transverse	3.5 (25) Longitudinal 2.2 (16) Transverse	3.5 (25) Longitudinal 2.6 (20) Transverse
NIT TEMPERATURE °C			-57 aver.
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	135 - 170	140 - 181	137 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming and cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.43	1.43	1.43

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ASTM-A678 Gr. A	ABS Low - Temp. Gr. V-039	ABS Low - Temp. Gr. V-051
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Fine grain practice	Fine grain practice	Fine grain practice
HEAT TREATMENT	Quenched & tempered	Normalized	Normalized
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.16	0.20	0.16
Manganese	0.90 - 1.50	0.90 - 1.35	1.15 - 1.50
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.05	0.04	0.04
Silicon	0.15 - 0.50	0.10 - 0.35	0.10 - 0.35
Chromium		0.25 max.	0.25 max.
Nickel		0.80 max.	0.80 max.
Molybdenum		0.08 max.	0.08 max.
Copper	0.20 - 0.35*	0.35 max.	0.35 max.
Titanium			
Vanadium		0.10 max.	0.10 max.
Aluminum		0.065 max.	0.065 max.
Others		0.05 max. Cb	0.05 max. Cb
Notes:	*When specified		
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 A MM (IN) or as noted (A=area of spe.)	49 - 63 (70 - 90) 35 (50) 22 in 51 MM (2 IN)	41 - 63 (58 - 90) 25 (36) 22	41 - 63 (58 - 90) 25 (36) 22
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	Purchaser specs. -73 2.8 (20) Longitudinal 2.0 (14) Transverse	-39 3.5 (25) Longitudinal 2.3 (17) Transverse	-51 3.5 (25) Longitudinal 2.3 (17) Transverse
NOT TEMPERATURE °C	-62 aver.	-57 aver.	-57 aver.
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	130 - 181	110 - 181	110 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Controlled welding process. Moderate preheat. Low-hydrogen practice. Normal forming & cutting practice.	Preheat required, if ambient temp. below 0°C Low-hydrogen practice. Selected electrodes. Normal forming & cutting practice	Preheat required, if ambient temp. below 0°C Low-hydrogen practice. Selected electrodes. Normal forming & cutting practice
RELATIVE YIELD FACTOR (None) on ABS (Grade A)	1.46	1.46	1.46

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ASTM-A678 Gr. B	ASTM-A633 Gr. E	ASTM-A678 Gr. C
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Fine grain practice	Fine grain practice	Fine grain practice
HEAT TREATMENT	Quenched & tempered	Normalized*	Quenched & tempered
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.20	0.22	0.22
Manganese	0.70 - 1.35	1.15 - 1.50	1.00 - 1.60
Phosphorus (max.)	0.04	0.04	0.04
Sulphur (max.)	0.05	0.05	0.05
Silicon	0.15 - 0.50	0.15 - 0.50	0.20 - 0.50
Chromium	0.25 max.		0.25 max.
Nickel	0.25 max.		0.25 max.
Molybdenum	0.08 max.		0.08 max.
Copper	0.20 - 0.35*		0.20 - 0.35*
Titanium		0.04 - 0.11	
Vanadium		0.01 - 0.03 Nitrogen	
Aluminum			
Others			
Notes:	*When specified	*Double normalized above 76 MM (3 IN).	*When specified
TENSILE REQUIREMENTS Ultimate KG/MM ² (KSI) Yield (min.) KG/MM ² (KSI) Elongation (min.) % in 5.65 in (1 IN) or as noted (A=area of spec.)	56 - 70 (80 - 100) 42 (60) 22 in 51 MM (2 IN)	56 - 70 (80 - 100) 42 (60) 23 in 51 MM (2 IN)	For 38 MM (1.5 IN) incl. 63 - 77 (90 - 110) 49 (70) 19 in 51 MM (2 IN)
CHARPY V-NOTCH IMPACT TEST Temperature °C Energy, KG-M (FT-LB)	Purchaser Specs. -73 2.0 (14) Longitudinal 1.4 (10) Transverse	-40 3.5 (25) Longitudinal 2.8 (20) Transverse	Purchaser Specs. -73 2.8 (20) Longitudinal 2.0 (14) Transverse
NOT TEMPERATURE °C	-57 aver.	-46 aver.	-73 to -60
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN			
ABRASION RESISTANCE AS BRINELL HARDNESS	159 - 202	159 - 202	181 - 221
REQUIRED WELDING AND FABRICATION TECHNIQUES	Controlled welding process. Moderate preheat. Low-hydrogen practice. Normal forming & cutting practice.	Controlled welding process. Moderate preheat. Low-hydrogen practice. Normal forming and cutting practice.	Controlled welding process with preheating. Low-hydrogen practice. Selected electrodes. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.48	1.49	1.50

TABLE B-3.3 (Continued)
PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ASTM-A537 Class 2	ASTM-A737 Gr. B	CG-A537 Gr. B
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Fine grain practice	Killed, fine grain practice	
HEAT TREATMENT	Quenched & tempered	Normalized	Quenched & tempered
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.24	0.22	0.16
Manganese	0.70 - 1.35	1.10 - 1.55	0.90 - 1.50
Phosphorus (max.)	0.035	0.035	0.035
Sulphur (max.)	0.040	0.035	0.040
Silicon	0.15 - 0.50	0.10 - 0.55	0.15 - 0.35
Chromium	0.25 max.		0.25 max.
Nickel	0.25 max.		0.25 max.
Molybdenum	0.00 max.		0.00 max.
Copper	0.15 max.		0.15 max.
Titanium			
Vanadium			
Aluminum			
Others		0.05 max. (b)	
Notes:			
TENSILE REQUIREMENTS			
Ultimate KG/MM ² (KSI)	56 - 70 (80 - 100)	49 - 63 (70 - 90)	49 - 63 (70 - 90)
Yield (min.) KG/MM ² (KSI)	42 (60)	35 (50)	35 (50)
Elongation (min.) % in 5.65 A MM (IN) or as noted (A=area of spe.)	22 in 51 MM (2 IN)	23 in 51 MM (2 IN)	22 in 51 MM (2 IN)
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-60	-46	-51
Energy, KG-M (FT-LB)	2.1 (15) Longitudinal	3.5 (25) Longitudinal 2.0 (20) Transverse	2.0 (20) Transverse
NOT TEMPERATURE °C	-62 to -51		-62 aver.
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN	76 (550)		
ABRASION RESISTANCE AS BRINELL HARDNESS	159 - 202	137 - 181	138 - 181
REQUIRED WELDING AND FABRICATION TECHNIQUES	Controlled welding process. Moderate preheat. Low-hydrogen practice. Normal forming & cutting practice.	Moderate preheat for welding. Low-hydrogen practice. Normal forming & cutting practice.	Controlled welding process. Moderate preheat. Low-hydrogen practice. Normal forming & cutting practice.
RELATIVE COST FACTOR (Based on AISI Grade A)	1.51	1.51	1.52

TABLE B-3.3 (Continued)

PROPERTIES OF STEELS USED FOR ICE-STRENGTHENED SHIPS

STEEL TYPE & GRADE	ASTM-A710 Gr. A Class 3	NY-80 NIL-S-16216H	NY-100 NIL-S-16216H
PROCESS OF MANUFACTURE	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process	Open-hearth, basic-oxygen, or electric-furnace process
DEOXIDATION	Killed, fine grain practice		
HEAT TREATMENT	Quenched & tempered	Quenched & tempered	Quenched & tempered
CHEMICAL COMPOSITION (Ladle Analysis - %)			
Carbon (max.)	0.07	0.10	0.20
Manganese	0.40 - 0.70	0.10 - 0.40	0.10 - 0.40
Phosphorus (max.)	0.025	0.025	0.025
Sulphur (max.)	0.025	0.025	0.025
Silicon	0.40 max.	0.15 - 0.35	0.15 - 0.35
Chromium	0.60 - 0.90	1.00 - 1.00	1.00 - 1.00
Nickel	0.70 - 1.00	2.00 - 3.25	2.25 - 3.50
Molybdenum	0.15 - 0.25	0.20 - 0.60	0.20 - 0.60
Copper	1.00 - 1.30	0.25 max.	0.25 max.
Titanium		0.02 max.	0.02 max.
Vanadium		0.03 max.	0.03 max.
Aluminum			
Others	0.02 min. Cb		
Notes:			
TENSILE REQUIREMENTS	For 25.4 MM (1 IN) incl.		
Ultimate KG/MM ² (KSI)	60 (85)	70 (100) min.	81 (115) min.
Yield (min.) KG/MM ² (KSI)	53 (75)	56 (80)	70 (100)
Elongation (min.) % in	20	20	10
5.65 $\sqrt{A}$ MM (IN) or as	51 MM (2 IN)	In 51 MM (2 IN)	In 51 MM (2 IN)
noted (A=area of spe.)			
CHARPY V-NOTCH IMPACT TEST			
Temperature °C	-62	-84	-84
Energy, KG-M (FT-LB)	6.9 (50) Longitudinal 4.8 (35) Transverse	6.9 (50)	6.9 (50)
NOT TEMPERATURE °C	-73 aver.	-107 aver.	
DYNAMIC TEAR ENERGY IN KG-M (FT-LB) AT 24°C FOR 16 MM (5/8 IN) THICK SPECIMEN	140 (1012)		
ABRASION RESISTANCE AS BRINELL HARDNESS	170	201	233
REQUIRED WELDING AND FABRICATION TECHNIQUES	Little or no preheat requirements for welding. Special electrodes. Plates can be fabricated in the as-rolled condition.	Careful control of welding process. Chatty electrodes. Additional forming power. Plate temp. for flame cutting not below 10°C.	Careful control of welding process. Chatty electrodes. Additional forming power. Plate temp. for flame cutting not below 10°C.
RELATIVE CRIT FACTOR (Based on AISI Grade A)	2.51	3.11	3.21

APPENDIX B-4
TABULAR WEIGHT AND COST DATA

TABLE B-4.1
TYPICAL MIDBODY PANEL WEIGHTS & COSTS - POLAR STAR (Panel Height = 8.5 ft)

CLASS	STIFF. SPCG.	PLTG. THCK.	STIFF. S.M.	STIFFENER SIZE	% CHG. WGT.	% CHG. COST
ABS A1, C; Lloyds 3; DNV ICE C; BV III; USSR A3, A4; PRC BIII	26	0.40	6	5" x 3-1/2" x 1/4" L	00	00
USSR A2; PRC BII; BV II	26	0.45	6	5" x 3-1/2" x 1/4" L	10.4	10.4
ABS IC	26	0.50	6	5" x 3-1/2" x 1/4" L	20.9	20.9
ABS B; Lloyds 2	26	0.55	6	5" x 3-1/2" x 1/4" L	31.3	31.3
ABS IB; NKK B, C	26	0.70	6	5" x 3-1/2" x 1/4" L	62.6	62.6
ASPPR 1; ABS IA	26	0.75	22	8" x 4" x 1/2" L	102.7	102.7
ABS IAA	26	1.00	22	8" x 4" x 1/2" L	136.9	136.9
ASPPR 2	26	1.55	87	13-3/4" x 8" x 48# I-T	301.3	301.3
ASPPR 4	26	2.00	145	16-3/8" x 10-1/4" x 67# I-T	423.1	423.1
ASPPR 7	26	2.25	106	21-1/4" x 8-1/4" x 73# I-T	496.9	496.9
ASPPR 10	26	2.35	208	21-3/8" x 8-3/8" x 83# I-T	533.9	533.9
ASPPR 1	16	0.60	15	7" x 4" x 3/8" L	77.1	77.9
NKK A	16	0.80	15	7" x 4" x 3/8" L	118.8	120.0
ASPPR 2; NKK AA	16	0.90	30	8" x 6" x 1/2" L	175.8	177.6
DNV Icebreaker	16	1.10	30	9" x 4" x 1/2" L	211.0	213.1
DNV Arctic Icebreaker	16	1.45	30	9" x 4" x 1/2" L	284.0	286.8
ASPPR 2	16	0.95	54	12-1/2" x 6-1/2" x 35# I-T	190.0	191.9
ASPPR 4	16	1.25	90	13-7/8" x 8" x 53# I-T	300.5	303.5
ASPPR 7	16	1.40	116	14" x 10" x 68# I-T	365.6	369.3
ASPPR 10	16	1.45	129	18-1/4" x 7-1/2" x 60# I-T	370.3	374.0
ABS A; Lloyds 1; USSR A1; BV I; PRC BI	13	0.50	6	4" x 3-1/2" x 3/8" L	47.2	48.1
Lloyds 1*; PRC BI*	13	0.55	6	5" x 3-1/2" x 1/4" L	47.6	48.6
BV I-Super	13	1.25	6	5" x 3" x 1/4" L	192.0	195.8
USSR Y:	13	0.55	10	6" x 4" x 5/16" L	63.4	64.7

TABLE B-4.2
TYPICAL MIDBODY PANEL WEIGHTS & COSTS - MV ARCTIC (Panel Height = 27 ft)

CLASS	STIFF. SPCG.	PLTG. THCK.	STIFF. S.M.	STIFFENER SIZE	% CHG. WGT.	% CHG. COST
ABS A1, C, IC; Lloyds 2, 3; DNV ICE C; BV III; USSR A3, A4; NKK C; PRC BIII	33	0.67	117	18-1/8" x 7-1/2" x 55# I-T	00	00
BV II; USSR A2; PRC BII	33	0.75	117	18-1/8" x 7-1/2" x 55# I-T	7.8	7.8
ABS B, IB; NKK B	33	0.90	117	18-1/8" x 7-1/2" x 55# I-T	22.3	22.3
ASPPR 1	33	1.00	117	18-1/8" x 7-1/2" x 55# I-T	32.1	32.1
ABS IA	33	1.05	117	18-1/8" x 7-1/2" x 55# I-T	36.9	36.9
ABS IAA	33	1.15	122	18-1/8" x 7-1/2" x 55# I-T	46.6	46.6
ASPPR 2	33	1.60	260	24-1/4" x 9-1/8" x 94# I-T	115.8	115.8
ASPPR 4	33	2.25	530	33-1/4" x 11-1/2" x 141# I-T	211.0	211.0
ASPPR 7	33	2.70	750	36-3/8" x 12-1/8" x 182# I-T	282.3	282.3
ASPPR 10	33	3.00	950	35-7/8" x 16-1/2" x 230# I-T	334.6	334.6
DNV Icebreaker	20	0.70	1161	T-52" x 1" Web, 11-1/2" x 1-1/4" Flg.	290.6	299.4
DNV Arctic Icebreaker	20	1.00	1451	T-52" x 1" Web, 11-1/2" x 1-3/4" Flg.	347.7	358.2
ASPPR 1	17	0.50	50	12" x 9" x 15.3# Flg. Plt.	- 7.2	- 5.3
USSR A2	17	0.85	80	13-5/8" x 8" x 43# I-T	38.1	38.9
NKK A	17	0.95	90	16-1/4" x 7-1/8" x 50# I-T	48.4	49.4
Lloyds 1	17	0.67	117	15" x 8" x 30.6# Flg. Plt.	60.5	61.7
Lloyds 1*	17	0.75	117	15" x 8" x 30.6# Flg. Plt.	68.3	69.7
PRC BI, BV I	17	0.80	117	18-1/4" x 7-1/2" x 60# I-T	51.3	52.3
ABS A; USSR YA; PRC BI*	17	0.85	117	18-1/4" x 7-1/2" x 60# I-T	56.2	57.3
BV I-Super	17	1.20	117	18-1/8" x 7-1/2" x 55# I-T	84.3	86.0
ASPPR 2	17	0.80	130	18" x 8" x 25.5# Flg. Plt.	68.4	69.8
NKK AA	17	1.05	130	24" x 6" x 17.85# Flg. Plt.	76.1	77.6
ASPPR 4	17	1.15	266	T-15" x 1" Web, 8" x 2" Flg.	189.0	196.6
ASPPR 7	17	1.35	376	T-20" x 1" Web, 8" x 2" Flg.	237.0	246.6
ASPPR 10	17	1.50	476	T-22" x 1" Web, 8" x 2-1/4"	274.5	285.6

TABLE B-4.3
TYPICAL MIDBODY PANEL WEIGHTS & COSTS - ARCTIC TANKER (Panel Height = 7.5 ft)

CLASS	STIFF. SPCG.	PLTG. THCK.	STIFF. S.M.	STIFFENER SIZE	% CHG. WGT.	% CHG. COST
ABS #A1, B, C, ID, IC; Lloyds 2, 3; DNV ICE C; BV II, III; USSR A2, A3, A4; NKK C; PRC BIII	40	1.05	38	10-1/2" x 5-3/4" x 30# I-T	00	00
NKK B	40	1.10	38	10-1/2" x 5-3/4" x 30# I-T	4.2	4.2
PRC BII	40	1.15	38	10-1/2" x 5-3/4" x 30# I-T	8.3	8.3
ABS IA; ASPPR 1	40	1.20	38	10-1/2" x 5-3/4" x 30# I-T	12.5	12.5
ABS IAA	40	1.35	38	10-1/2" x 5-3/4" x 30# I-T	25.0	25.0
ASPPR 2	40	2.35	106	18" x 6" x 20.4# Flg. Plt.	119.9	119.9
ASPPR 4	40	3.05	175	21" x 8-1/4" x 62# I-T	181.9	181.9
ASPPR 7	40	3.45	226	23-7/8" x 9" x 76# I-T	221.7	221.7
ASPPR 10	40	3.65	252	24-1/8" x 9" x 84# I-T	246.2	246.2
DNV Icebreaker	28	2.55	61	12" x 8" x 40# I-T	135.5	136.9
DNV Arctic Icebreaker	28	3.60	77	15" x 3-3/8" x 40# C-L	228.7	231.0
ASPPR 1	20	1.05	13	8" x 4" x 13" I-T	- 0.7	1.3
ABS A; Lloyds I; BV I	20	1.05	38	12-1/4" x 6-1/2" x 26# I-T	11.2	11.4
Lloyds I*; BV I-Super; PRC B1, B1*	20	1.25	38	12-1/4" x 6-1/2" x 26# I-T	27.9	28.5
USSR A1	20	1.35	38	12-1/4" x 6-1/2" x 26# I-T	36.2	36.9
ASPPR 2	20	1.20	53	9-1/8" x 7-1/2" x 30# T	36.5	37.2
NKK A	20	1.20	66	14-1/8" x 6-3/4" x 38# I-T	32.9	33.6
ASPPR 4	20	1.50	88	12" x 9" x 38# T	71.3	72.7
NKK AA; USSR YA	20	1.30	99	18" x 6" x 20.4# Flg. Plt.	57.0	58.1
ASPPR 7	20	1.70	113	16-3/8" x 7-1/8" x 57# I-T	92.2	94.0
ASPPR 10	20	1.80	127	21" x 6" x 20.4# Flg. Plt.	104.8	106.9

APPENDIX C
REVIEW OF METHODS FOR DAMAGE ANALYSIS

1. INTRODUCTION

The objective of this part of the study is to identify and review currently available methods for analyzing ship damage; that is to determine the external ice loads which caused the hull failure. A complete identification of such loads acting normal to the shell plating requires knowledge of:

- the area of action
- the pressure distribution within this area.

These variables can be used to calculate the average pressure distribution and the total load.

There is no method, within the state-of-the-art, which can be used to determine the ice pressure distribution. Therefore, it is common to assume a uniform pressure within the contact area. Nonetheless, the influence of pressure distribution is thought to have significant effects on the unevenness of load distribution on the hull structure. The assumption of uniform pressure on a small plate panel is, on the other hand, quite acceptable.

In most damage incidents, if not all of them, an analyst is bound to make some assumptions as to how the damage occurred. Although simple damage analysis techniques do not require elaborate data and it is often sufficient to have the structural detail, knowledge of the damage circumstances is essential to the understanding of such occurrences. For instance, in order to justify the damage location, one should know the operating draft and trim of the ship, ice thickness, type of ice, and possible physical description.

The review of damage analysis methods is divided into two sections: the first is concerned with simple techniques which attempt to predict the uniform failure pressures without regard to how it occurred, while the second section is devoted to proposing a more detailed approach to study ice damage.

2. SIMPLE METHODS

The simplest approach considers the failure of basic components of the hull under uniform pressure. For instance, consider a long plate panel supported along its four sides by frames and stringers and subjected to uniform lateral pressure. The maximum pressure required to cause one of the following conditions can be estimated:

- reach the elastic limit,
- cause one plastic hinge at the center,
- cause two plastic hinges at the supports,
- cause three plastic hinges, one at the center and two at the supports,
- cause plate rupture due to membrane tension, etc.

Therefore, the criterion of failure is important to define and various methods will now be reviewed.

2.1 Elastic Method

Considering the standard plate panel fixed at all edges and subjected to uniform pressure over the entire plate, the maximum pressure for the stress at the center of the support, not to exceed the elasticity limit, is given in any standard elasticity handbook, e.g. [E-27], as follows:

$$p = \frac{1}{\beta} \sigma_y \cdot \left(\frac{t}{s}\right)^2$$

where σ_y = the yield strength of the material (2400 kp/cm² for structural steel $\approx$ 35000 psi)

t = the plate thickness

s = the spacing between long edges or frames

β = is a coefficient = 0.5 for an aspect ratio > 2

Therefore,

$$p = 2 \sigma_y \left(\frac{t}{s}\right)^2 \quad (C.1)$$


2.2 Elastic - Perfectly Plastic

The simplest method for damage analysis is the so-called plastic method proposed by Johansson in 1967 [E-13]. The method is based on the premise that a permanent set does not occur until three plastic hinges develop; one at each support and one at the center of the plate as shown in Figure D.1a. The minimum uniformly distributed pressure, p , required to satisfy this condition, is given by:


$$p = 4 \sigma_y \frac{t^2}{s^2} \cdot \frac{1}{f_d} \quad (C.2)$$

FIGURE D.1
PLASTICITY METHOD FOR DAMAGE ANALYSIS


(a) Definition of Plate Calculations

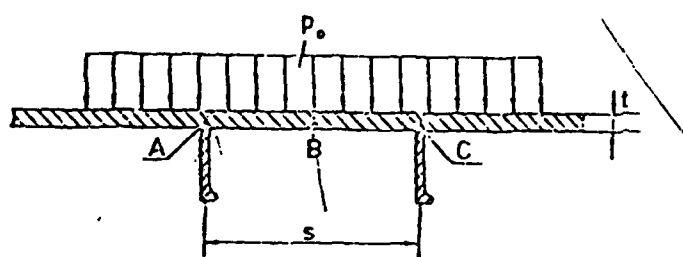

(c) Definitions of Frame Calculations

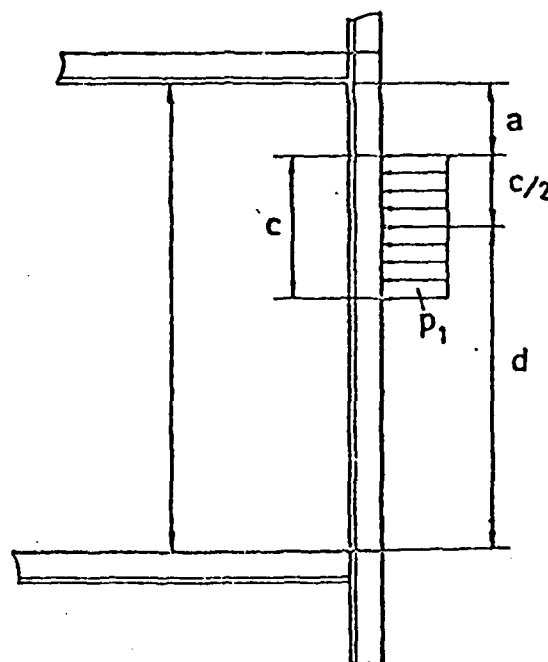

(b) The Coefficient f_d gives the reduction in the plating stress, because of the distributing effect due to the limited vertical extension of the ice-pressure

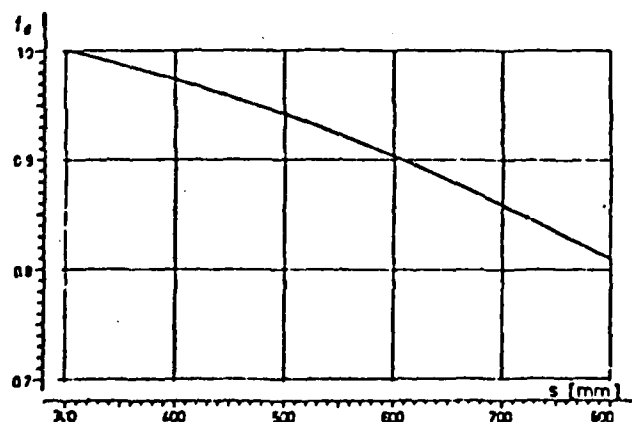

where p = the maximum pressure the plating can carry without onset of plastic deformation, kp/cm^2

σ_y = the yield strength of the plate material, kp/cm^2 ($\approx 2400 \text{ kp/cm}^2$ for mild steel)

t = the plate thickness, mm

s = the frame spacing, mm

f_d = a correction factor which accounts for frame spacing and is given in Figure C.1(b).

The maximum pressure the frames can accommodate without plastic hinge formation, p_1 , is expressed by:

$$p_1 = \frac{2000 \sigma_y W_p \ell}{c.s.d. (a + c.d/2\ell)} \quad (\text{C.3})$$

where W_p = the plastic section modulus, cm^3 (which includes plate portion)

ℓ = the span of the frame, m

c = the width of ice pressure, usually taken as maximum ice thickness, mm

a & d are illustrated in Figure C.1(c)

For $d = \ell/2$, the frame stresses will be maximum and the pressure reduces to:

$$p_1 = \frac{16000 \sigma_y \cdot W_p}{c.s (2\ell - c)} \quad (\text{C.4})$$

Johansson used this method to determine the maximum pressure which would have caused hull damage for 200 ship damage cases. The damage pressure estimated by this method is based on an assumed standard contact area extending over at least two frame spacings and the full depth of ice assumed to be 800 mm.

The major criticism for this method is the fact that it does not take into account in-plane tension or membrane effects of the plate.

2.3 Plastic Method with Membrane Effect

This method was proposed by Clarkson [E-6] in 1956. It is applicable to plate design and retains the influence of geometry changes and thus, takes into account membrane forces and their effect on increasing the load carrying capacity. Assuming uniformity, the pressure corresponding to one plastic hinge is given by:

$$p = 4.56 [\sigma_y^{4/3} / E^{1/3}] \cdot \left(\frac{t}{s}\right)^{4/3} \quad (\text{C.5})$$

where E = the elastic modulus of the hull plate material and other variables are previously defined.

Archtarides [E-1] used the data reported by Johansson [E-13] to calculate (t/s) and, then, used equation (C.5) to estimate ice pressures and propose different design curves.

In fact, a direct comparison between equations (C.5) and (C.2) is not possible because each one is based on different failure criterion. For the pressure to cause three plastic hinges with consideration of membrane effect, equation (C.5) should be corrected by approximately a factor of 2 to read:

$$p = 9.12 [\sigma_y^{4/3} / E^{1/3}] \cdot (t/s)^{4/3} \quad (C.6)a$$

Rearranging (C.6)a obtain:

$$p = \left\{ 4 \sigma_y \left(\frac{t}{s} \right)^2 \right\} \cdot \left\{ 2.28 \sqrt[3]{\left(\frac{\sigma_y}{E} \right) \cdot \left(\frac{s}{t} \right)^2} \right\} \quad (C.6)b$$

Comparing (C.6) with (C.2) for structural steel and $S/t \approx 10$ it appears that consideration of membrane effects increases the pressure load capacity by approximately 11-12%. This ratio would increase for high strength steels as well as higher spacing to thickness ratios. It is equally true that for thick steel with closely spaced framing, the membrane effects will be negligible.

2.4 Empirical Pressure Distribution Method

This method is based on empirical grounds proposed by Kheysin [B-18]. He suggests that due to the flexibility of the shell, ice pressure will be distributed as illustrated in Figure C.2. The maximum load on transverse frames is:

$$P = q_o \cdot a \quad (C.7)$$

where $q_o = \sigma_o \cdot h/2$; σ_o = ice crushing strength
 h = thickness

$$a = 3.3 \sqrt[3]{\frac{E_s}{E_i} \cdot \frac{I_s}{l}}; \quad E_s = \text{elasticity of the hull steel}$$

E_i = elasticity of ice

I_s = section moment of inertia of the stringer

l = spacing between bulkheads


This method can be used to assess the pressure distribution that caused damage if used in conjunction with a plastic failure criterion such as Johansson's. We should write:

$$P = p_1 \cdot h \cdot S \quad (C.8)$$


where p_1 can be obtained from equation (C.4). By working back a , obtain q_o and estimate σ_o under actual conditions of interaction. However, it should be noted that the method pertains to bulkheads and stringers in the middle body of a ship, and it is not clear to us how this method can be applied to analysis of main frames with

FIGURE C.2
ICE PRESSURES ON THE HULL

(a) Actual Pressure Distribution

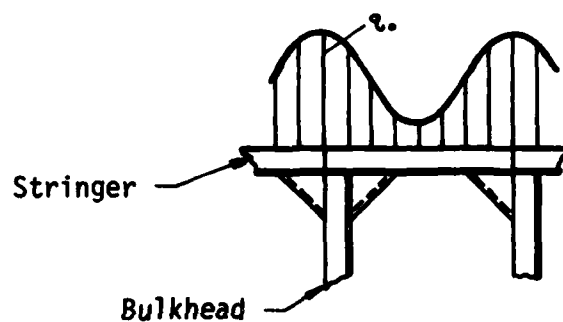

(b) Idealized Distribution

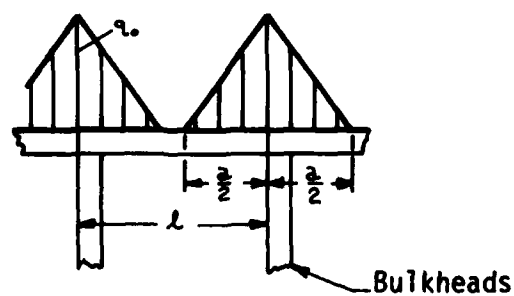

proper account of pressure distribution effects. One possible way is to set limits on the value of α in equation (C.7).

2.5 Plastic Energy Method

Plastic analysis procedure was developed by McDermott, et al [E 24] for the analysis of tanker collision. Although the procedure, which is based on model tests and inspection of collision damage, was never extended to ice damage, it is potentially useful in this regard. The approach is based on the calculation of plastic energy components up to the incidence of hull rupture. This primarily involves three phenomena producing plastic deformation: longitudinal plastic bending of the stiffened hull plating, plastic membrane tension in the stiffened hull plating, and yield or buckling of the web frames (and/or swash bulkheads). Figure C.3 shows the possible sequences of these three phenomena for a single hull ship while Figure C.4 is concerned with a double hull ship. The authors suggested that most of the energy absorbed in collision (67 to 90%) is due to membrane tension in the stiffened hull. Therefore, damage is expected to initiate where less energy is required, e.g. bend and buckle stiffeners. The latter would enhance plate deformation through a loss of support and ultimately lead to shell failure. This scenario can be supported by the nature of damage due to ice observed on the MV ARCTIC.

Unfortunately, the formulas provided by McDermott, et al are only applicable to concentrated line load (due to ship incursion into another) and it is not suitable for any damage analysis due to ice. Attempts to test his method in case of ice damage proved it to produce unrealistic estimates of ice pressures and tremendous loads which can only exist in ship collision situations.

Nonetheless, his approach is one step ahead as he incorporates the effects of in-plane membrane effects. This leads to a higher hull loading capacity and within the context of damage analysis should produce higher ice pressure estimates.

Further development of plastic damage analysis procedures along these lines is highly recommended.

2.6 Case Study

The foregoing discussion is limited to one approach to the problem which uses *the reverse* of design criteria. It is capable only of suggesting what uniform pressure applied in a prescribed fashion on the hull plating would have caused structural failure. However, it remains the simplest and it can lead to some explanation of failure incidents.

To illustrate this, let us examine the damage inflicted by ice on the MV ARCTIC and attempt to predict ice pressures in accordance with the methods described in this section.

The damage is described by Laskey [G-11] and reproduced in the sketch shown in Figure C.5. The following details may be used:

$$t = 1.063''$$

$$S = 12.0'' \text{ (for intermediate frames)}$$

$$W_p = 94.7 \text{ in}^3$$

FIGURE C.3

FLOW DIAGRAM FOR SIDE-COLLISION PLASTIC-ENERGY
ANALYSIS OF SINGLE-HULL SHIP

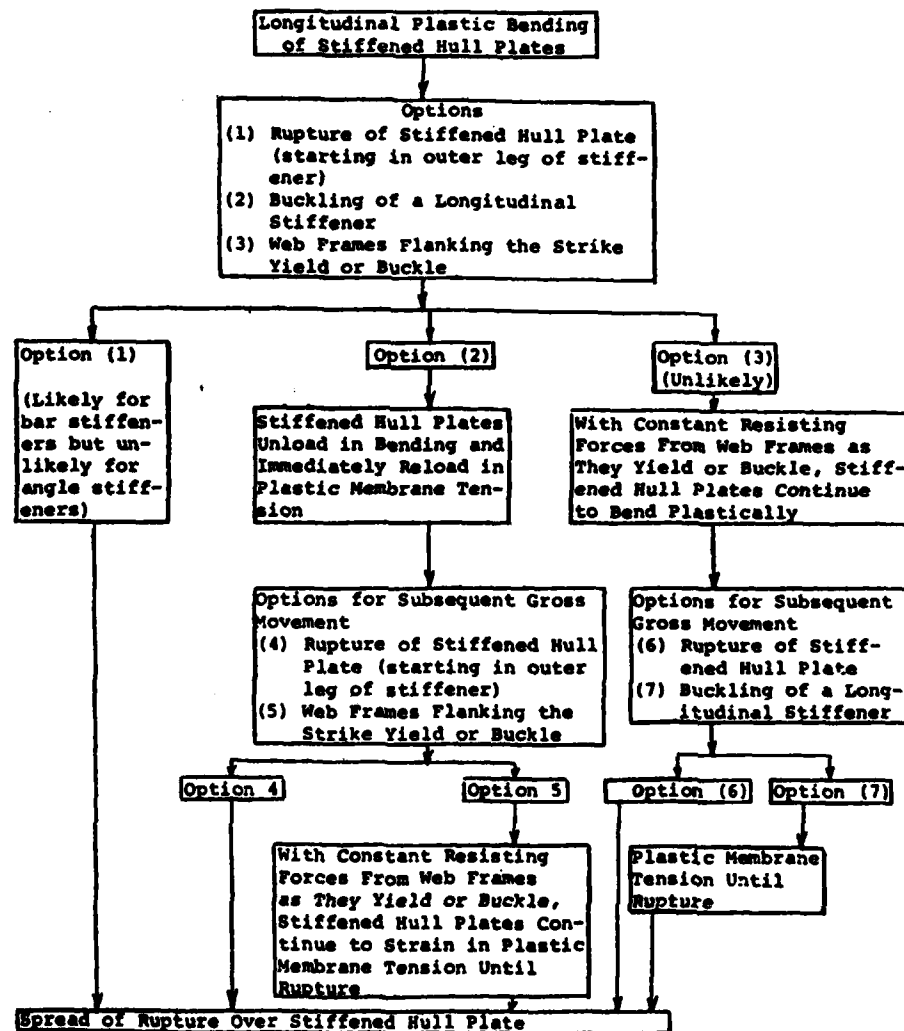


FIGURE C.4

FLOW DIAGRAM FOR SIDE-COLLISION PLASTIC-ENERGY
ANALYSIS OF A DOUBLE-HULL SHIP


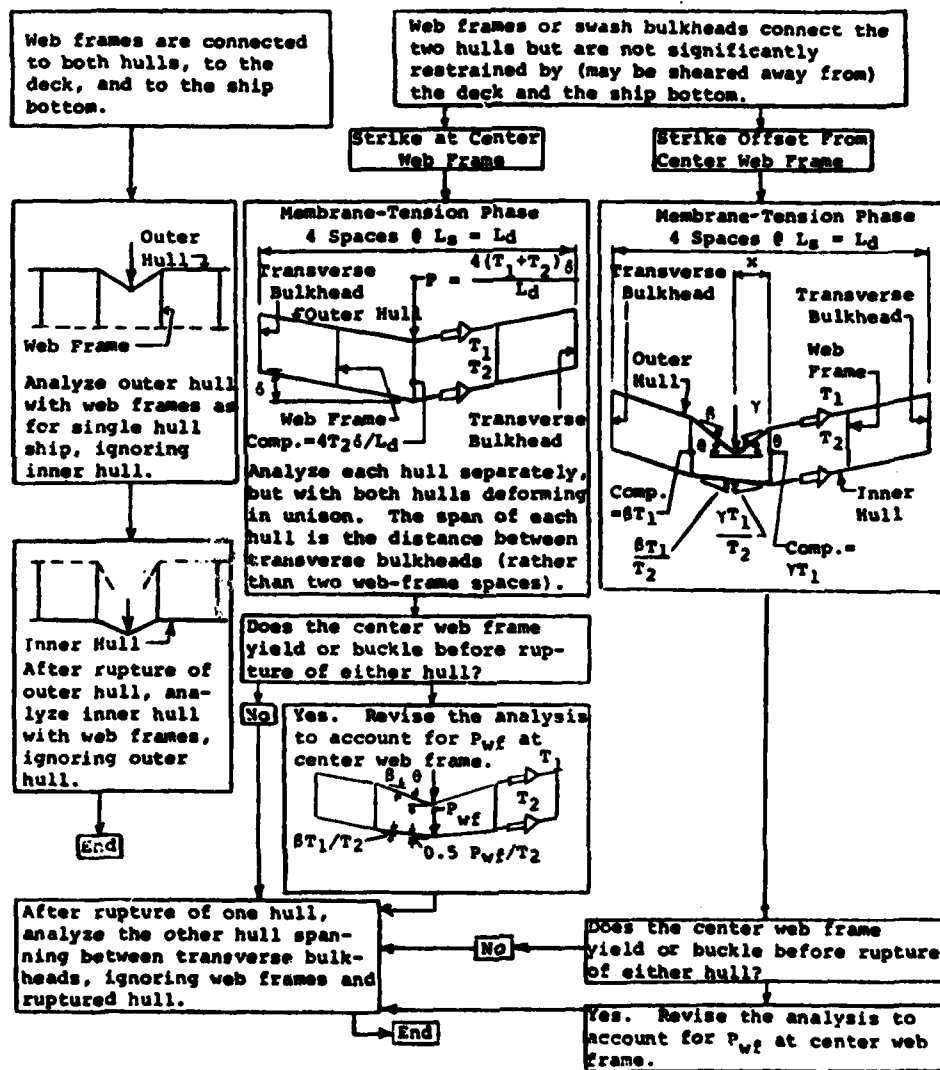


FIGURE C.5

SKETCH OF DAMAGE TO THE BOW OF MV ARCTIC

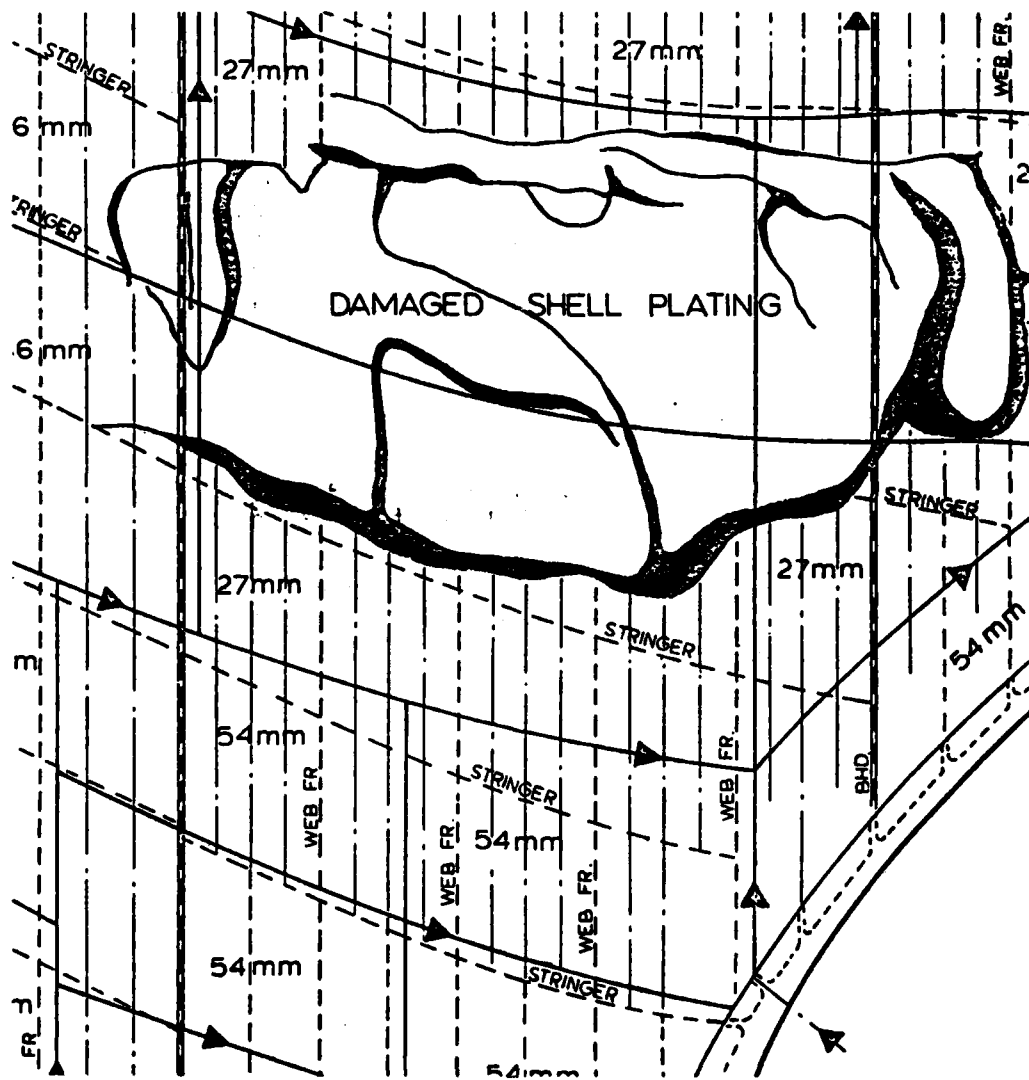

$$L = 48''$$

$$\sigma_y \approx 35,000 \text{ psi}$$

$$f_d = 1$$

$$h \approx 40''$$

Obtain from equation (C.1) elastic method	$p = 549 \text{ psi (3.79 MPa)}$
(C.2) Johansson's (plate)	1099 psi (7.75 MPa)
(C.4) Johansson's (frames)	2019 psi (13.9 MPa)
(C.5) Clarkson's method [21% higher than Eq.(C.2)]	1327 psi (9.15 MPa)

Therefore, the ice pressure which can cause failure to the plates is 1327 psi according to Clarkson while that required to cause frame damage, is 2019 psi. These figures are well in excess of the maximum rule design pressure of 600 psi set by ASPPR for Arctic Class 2 ships. While ice pressures of the order of 600 psi would not cause any structural damage or permanent deformation, it is obvious that the ship was subjected to an overload.

These results, obtained in comparison with the most conservative and most comprehensive design rules, i.e. the Canadian ASPPR, raise some questions relating to the adequacy of design pressures. However, it is essential to complete the entire scenario which gave rise to such high pressure. It may, indeed, have been a collision case with a fairly low probability of occurrence.

This leads us to the brief introduction of an alternative approach which is more detailed and it takes into consideration the scenario and circumstances of damage incident.

3. ALTERNATIVE APPROACH

This approach consists of several steps:

(1) Identify possible scenarios of interaction between ship and ice feature as well as data on ice type, strength, size, shape, etc.

(2) Run a computer simulation of the interaction scenario with proper input data and variations of angle of impact, most probable speeds at the time of impact, possible strengths of the ice, etc. The simulation should produce an estimate of the ice impact load as well as the average ice pressure on the hull. To the best of our knowledge there is one commercially available program at ARCTEC CANADA Limited; another version has been developed by Melville Shipping Ltd. of Montreal for internal use. The most useful data which can be obtained from this program are:

- the total impact load
- the average ice pressure
- the extent of contact of ice, i.e. shape and size of the area of contact
- where this area is located on the hull.

Several runs may be required to adjust the contact area with the damage location. The availability of more definitive data on the damage circumstances would help in providing a more realistic estimate of the load, pressure, and area of ice contact. It should be noted that the order of magnitude of ice crushing strength should be equivalent to estimates of ice pressure obtained by simple methods. For further information on such simulation methods, reference may be made to papers by Major, et al [B-26] and Noble, et al [B-36].

(3) Compare extent of ice load with the hull structural details and determine boundaries of a segment of the structure to be modeled. These boundaries should preferably be most rigid, e.g. bulkheads and floors. Establish necessary boundary conditions.

(4) Prepare a finite element model of the structure (3D model is preferred but a 2D model with lumped stiffeners may be accepted). A simplified ship structure segment as modeled by the finite element method is shown in Figure C.6. Apply external ice loads which have been determined earlier and estimate the "elastic" stresses and strains in various components. Output can be obtained with aid of standard graphics such as principal stress contours in both the shell and frames. Figure C.7 is an example of major principal stress contours in a typical structure. Such stresses can be examined to determine whether or not elastic limits were exceeded. This type of simple, inexpensive elastic finite element solution can produce a fairly good idea about where damage would start. Examination of stress levels would indicate locations on the shell and frames which will likely experience highest stresses. Some approximate correlations with the nature of observed damage can be made at this stage. There are a number of commercially available finite element programs which can be used for this purpose. To list a few:

FIGURE C.6
SIMPLIFIED FINITE-ELEMENT MODEL FOR TYPICAL STRUCTURE


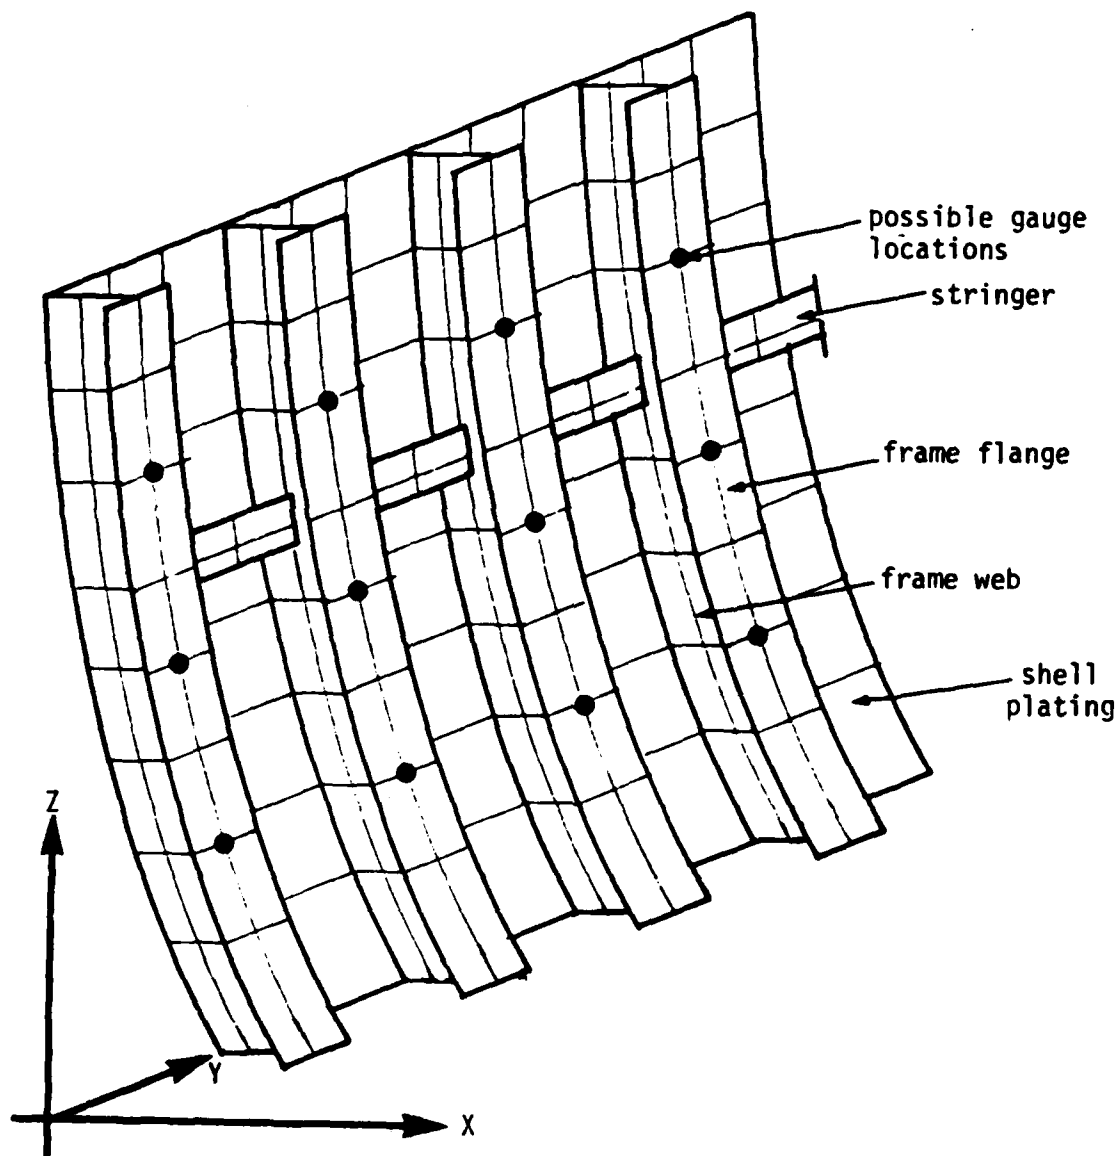


FIGURE C.7
STRESSES IN THE SHELL OF TYPICAL HULL STRUCTURE

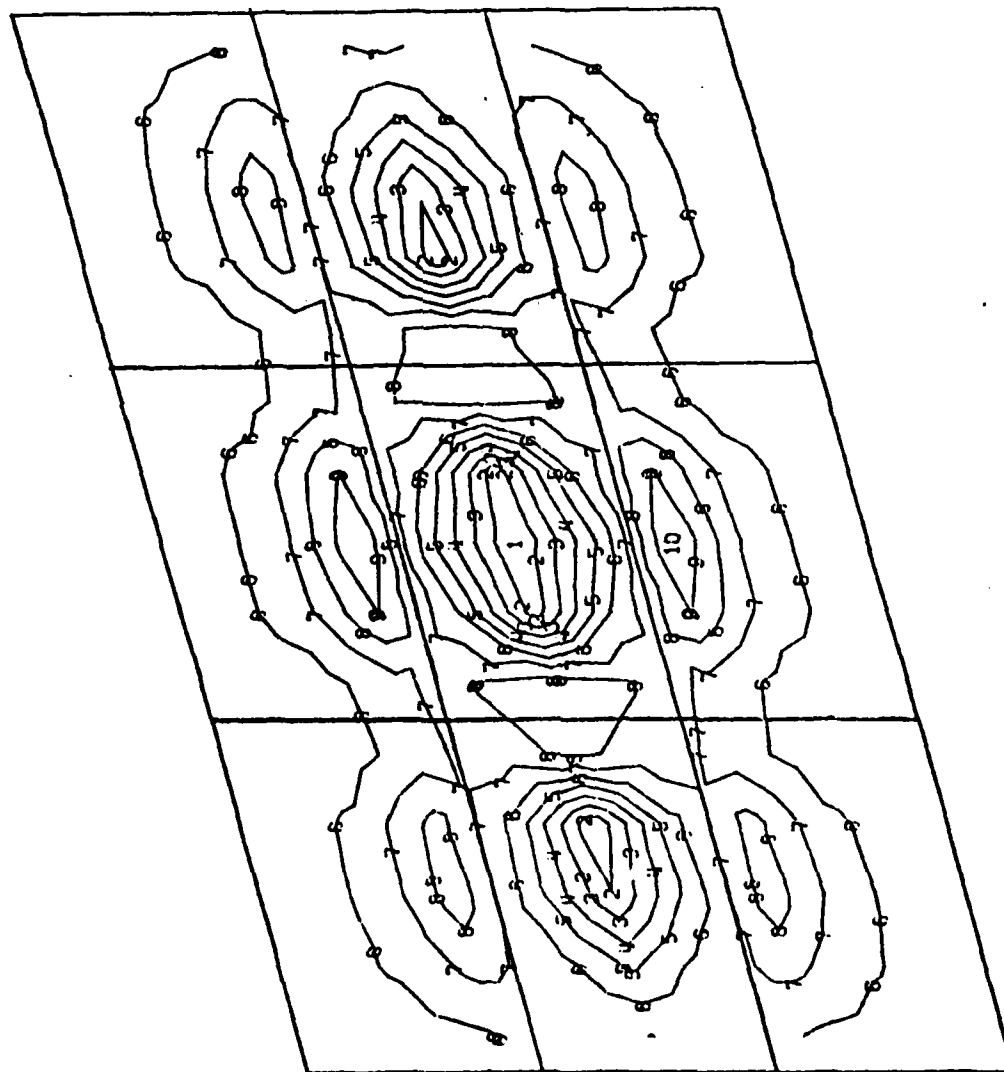

<u>SYMBOL</u>	<u>MAJOR STRESS</u>
1	-2.23E+2
2	-1.74E+2
3	-1.25E+2
4	-7.64E+1
5	-2.73E+1
6	2.17E+1
7	7.08E+1
8	1.19E+2
9	1.69E+2
10	2.18E+2

- NASTRAN
- ANSYS
- STARDYNE
- STRESS
- MARC

All of these are available world-wide, and further information may be obtained from major suppliers, such as Control Data, Multiple Access, or General Electric.

(5) A more advanced and much more expensive step is to allow the hull material to yield in accordance with a selected bilinear stress-strain relationship. In this case, continuous updating of the stiffness matrix will be maintained to account for the yielding of plate or frame elements of the structure. The cost of this updating is quite high, particularly if a complete solution is desired. For a moderate size model (say 500-1000 elements), consideration of plastic flow can easily increase the cost by ten-fold.


(6) A study of the influence of ice pressure distribution on the stress distribution and possibilities of failure of the structure can be done by arbitrarily structuring a stepped pressure distribution within the contact area without altering average value or the total ice load. This technique has been used successfully to analyze the structure of the CCGS LOUIS S. ST. LAURENT with some interesting results as to the effect of pressure distribution. These results are illustrated in Figure C.8.

The utilization of elastic solution may be satisfactory to the requirements of damage analysis where the available data on the damage is sketchy. However, more sophisticated evaluation using plastic yield of the material should be appropriate and is justified for situations where more accurate data is available on the damage incident. In fact, a combination of both would be necessary since the economic restraints could only allow one or two runs with plastic yielding in addition to several elastic runs to select the loading conditions for these two.

To date, there has been no complete and documented utilization of the procedure proposed herein. However, several studies have been conducted to investigate stresses and strains in different hull structural components by using FEM. The results appear to be quite informative and useful, suggesting that using the FEM to conduct damage analysis can produce better insight into the nature of stressing of the hull, under variable loading conditions. This can ultimately lead to the understanding of how damage initiates and propagates within the structure and hence, to some informed guidelines for better design of hull structures to withstand extreme ice load with minimal penalty on the weight and cost of the ship.

FIGURE C.8

EFFECT OF CHANGING PRESSURE DISTRIBUTION
ON STRESSES IN SHELL AND FRAMES

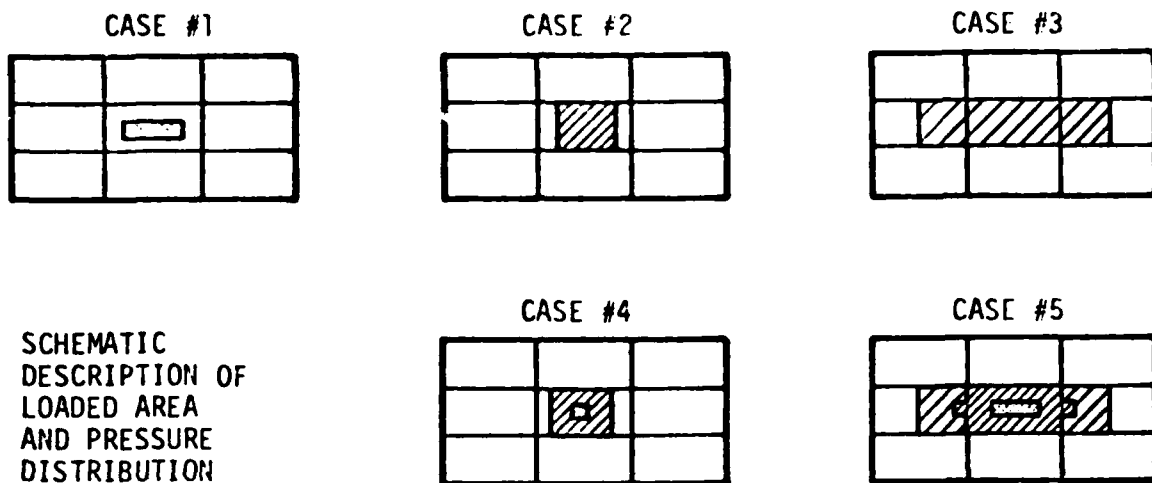

<u>CASES COMPARED</u>	<u>CONDITION</u>	<u>STRESS CHANGE</u>
1-2	Equal total loads, increased area, even distribution	-35% plate 0 frame
2-4	Equal total load, same area, changed distribution	+22% plate + 3% frame
3-5	Equal total load, same area, changed distribution	+77% plate +15% frame
4-5	Equal central pressure, changed area, increased total	+51% plate +224% frame

SHIP RESEARCH COMMITTEE
Maritime Transportation Research Board
National Academy of Sciences - National Research Council

The SHIP RESEARCH COMMITTEE has technical cognizance of the interagency Ship Structure Committee's research program.

Mr. A. D. Haff, Chairman, *Consultant, Annapolis, MD*
Prof. A. H.-S. Ang, *Civil Engrg. Dept., University of Illinois, Champaign, IL*
Dr. K. A. Blenkarn, *Research Director, Offshore Technology, Amoco Production Company, Tulsa, OK*
Mr. D. Price, Sr. *Systems Analyst, National Oceanic and Atmospheric Administration, Rockville, MD*
Mr. D. A. Sarno, *Manager-Mechanics, ARMCO Inc., Middletown, OH*
Prof. H. E. Sheets, *Dir. of Engineering, Analysis & Technology, Inc., Stonington, CT*
Mr. J. E. Steele, *Naval Architect, Quakertown, PA*
Mr. R. W. Rumke, *Executive Secretary, Ship Research Committee*

The SHIP DESIGN, RESPONSE, AND LOAD CRITERIA ADVISORY GROUP prepared the project prospectus and evaluated the proposals for this project.

Mr. J. E. Steele, Chairman, *Naval Architect, Quakertown, PA*
Mr. J. W. Boylston, *Consulting Naval Architect, Giannotti & Associates, Inc., Annapolis, MD*
Prof. R. G. Davis, *Assistant Professor of Naval Architecture, Dept. of Marine Engrg., Texas A&M University, Galveston, TX*
Mr. P. W. Marshall, *Civil Engineering Advisor, Shell Oil Company, Houston, TX*
Prof. R. Plunkett, *Dept. of Aerospace Engrg. and Mechanics, University of Minnesota, Minneapolis, MN*
Mr. C. B. Walburn, *Assistant Naval Architect, Bethlehem Steel, Corp., Marine Division, Sparrows Point, MD*

The SR-1267 *ad hoc* PROJECT ADVISORY COMMITTEE provided the liaison technical guidance, and reviewed the project reports with the investigator.

Mr. W. J. Lane, Chairman, *Consultant, Baltimore, MD*
Mr. L. R. Glosten, *L. R. Glosten Associates, Inc., Seattle, WA*
Mr. P. M. Kimon, *EXXON International Co., Florham Park, NJ*
Mr. P. W. Marshall, *Civil Engrg., Advisor, SHELL Oil Co., Houston, TX*
Mr. J. E. Steele, *Naval Architect, Quakertown, PA*