

AD-A121 883

USER'S GUIDE FOR COMPUTER PROGRAM HEAVE(U) ARMY
ENGINEER WATERWAYS EXPERIMENT STATION VICKSBURG MS
GEOTECHNICAL LAB L D JOHNSON SEP 82 WES/MP/GL-82-7

1/1

UNCLASSIFIED


F/G 13/13.

NL

END


FILED

SEP



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A 121883



2

MISCELLANEOUS PAPER GL-82-7

USER'S GUIDE FOR COMPUTER PROGRAM HEAVE

by

Lawrence D. Johnson

Geotechnical Laboratory

U. S. Army Engineer Waterways Experiment Station
P. O. Box 631, Vicksburg, Miss. 39180

September 1982

Final Report

Approved For Public Release; Distribution Unlimited

STIC
ELECTE
NOV 29 1982
D
E

Prepared for Office, Chief of Engineers, U. S. Army
Washington, D. C. 20314

Under RDT&E Work Unit AT40/E0/004

82 11 26 166

DATA FILE

**Destroy this report when no longer needed. Do not return
it to the originator.**

**The findings in this report are not to be construed as an official
Department of the Army position unless so designated
by other authorized documents.**

**The contents of this report are not to be used for
advertising, publication, or promotional purposes.
Citation of trade names does not constitute an
official endorsement or approval of the use of
such commercial products.**

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Miscellaneous Paper GL-82-7	2. GOVT ACCESSION NO. AD-A121883	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) USER'S GUIDE FOR COMPUTER PROGRAM HEAVE		5. TYPE OF REPORT & PERIOD COVERED Final report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Lawrence D. Johnson		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U. S. Army Engineer Waterways Experiment Station Geotechnical Laboratory P. O. Box 631, Vicksburg, Miss. 39180		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS RDT&E Work Unit AT40/E0/004
11. CONTROLLING OFFICE NAME AND ADDRESS Office, Chief of Engineers, U. S. Army Washington, D. C. 20314		12. REPORT DATE September 1982
		13. NUMBER OF PAGES 38
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Available from National Technical Information Service, 5285 Port Royal Road, Springfield, Va. 22151		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Computer programs Soil testing Foundations Soil swelling HEAVE (Computer program)		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The program HEAVE is a one-dimensional computer program for approximate analysis of vertical movements of swelling foundation soils beneath permanent structures caused by changes in vertical loads and/or the moisture profile. The program is applicable to slab, long continuous, and circular shaft founda- tions. Results of both one-dimensional consolidometer swell tests and soil suction tests may be used in HEAVE. (Continued)		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT (Continued).

→ The program considers effects of soil overburden pressures and structural loads, heterogeneous soils, and saturated or hydrostatic equilibrium moisture profiles on the computed heave. An arbitrary final soil suction profile may also be input if soil suction results are available. Differential heave may be estimated by comparing heaves computed for different soil strata and vertical loads.

HEAVE can estimate the movement of circular drilled shaft foundations, the maximum tension force in circular shafts from heave of surrounding swelling soil, and the restraining force provided by the underream (a bell or enlargement of the shaft base). Upward movement is assumed negligible if restraint exceeds the uplift thrust from surrounding swelling soil. Estimates of shaft movement can be made for moisture migrating down the shaft from the ground surface, moisture migrating from an intermediate zone such as from a relatively thin, pervious sandy stratum, and moisture migrating upward from below the base of the shaft such as from capillary rise of a rising water table.

11
Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Preface

This computer program and user's guide were prepared under RDT&E Work Unit AT40/EO/004, "Foundations on Swelling Soils," sponsored by the Office, Chief of Engineers, U. S. Army. The investigation on which this report is based was conducted during FY 81.

This user's guide was prepared by Dr. L. D. Johnson, Research Group (RG), Soil Mechanics Division (SMD), Geotechnical Laboratory (GL), U. S. Army Engineer Waterways Experiment Station (WES) under the general supervision of Mr. C. L. McAnear, Chief, SMD, and Dr. W. F. Marcuson III, Chief, GL. Dr. P. F. Hadala, Assistant Chief, GL, Dr. E. B. Perry, RG, SMD, and Mr. G. B. Mitchell, Chief, EG, SMD, reviewed the report.

The Commander and Director of WES during preparation of this report was COL Tilford C. Creel, CE. The Technical Director was Mr. Fred R. Brown.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	



Contents

	<u>Page</u>
Preface	1
Conversion Factors, U. S. Customary to Metric (SI) Units of Measurement	3
Purpose and Scope	4
Methodology of Computations	4
Foundation movement	4
Equilibrium pore water pressure	7
Depth of the active zone	8
Effect of uplift forces	9
Bearing capacity	12
Computer Program	12
Input data	12
Output data	12
Example Application	13
Slab in excavation	13
Long continuous footing	13
Circular shaft	13
References	17
Tables 1-9	
Appendix A: Program Listing	A1

Conversion Factors, U. S. Customary to Metric (SI)
Units of Measurement

U. S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

<u>Multiply</u>	<u>By</u>	<u>To Obtain</u>
feet	0.3048	metres
pounds (force) per square foot	47.88026	pascals
square feet	0.09290304	square metres
tons (force)	8896.444	newtons
tons (force) per square foot	95.76052	kilopascals
tons (mass) per cubic foot	320.3692	kilograms per cubic metre

USER'S GUIDE FOR COMPUTER PROGRAM HEAVE

Purpose and Scope


1. The purpose of this user's guide is to document the computer program HEAVE, which was developed to assist the design engineer in determining optimum foundations in expansive soils. This program may be used to estimate vertical foundation movements for the methodology described in TM 5-818-7 (Headquarters, Department of the Army 1982). The program HEAVE approximates potential vertical movements beneath the center or corner of rectangular slab foundations, beneath the central axis or edge of long (or strip) continuous footings, and beneath the center of circular deep shaft foundations. Vertical movement may also be computed for soils beneath these foundations constructed in excavations and for soils adjacent to the foundation not confined by structural loads. Foundation movement estimated by HEAVE has been checked by comparison with field test sections (Johnson 1981) and practical application to existing structures.

2. Structural loads are assumed to be transferred to the supporting soils, and the soil-bearing capacity is assumed not to be exceeded beneath the foundations. Computation of potential heave beneath the circular deep shaft foundation also considers the restraining force of underreams and the uplift force of swelling adjacent soil. Laboratory test data from consolidation swell or soil suction tests are used in the program HEAVE.

Methodology of Computations

Foundation movement

3. The potential total vertical heave at the bottom of the foundation as shown in Figure 1 is determined by

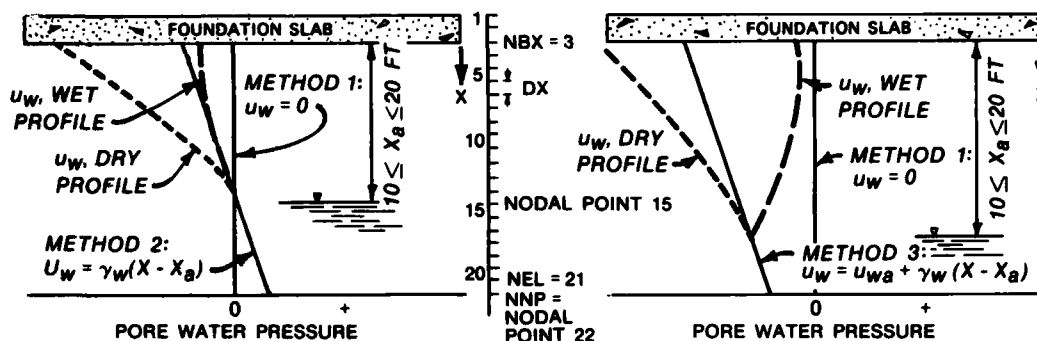

a. Shallow Groundwater Level

b. Deep Groundwater Level

Figure 1. Schematic for computation of vertical movement by program HEAVE

$$\Delta H = N \cdot DX \sum_{i=NBX}^{i=NEL} \text{DELTA}(i) = N \cdot DX \sum_{i=NBX}^{i=NEL} \frac{e_f(i) - e_o(i)}{1 + e_o(i)} \quad (1)$$

where

ΔH = potential vertical heave at the bottom of the foundation, ft*

N = fraction of volumetric swell that occurs as heave in the vertical direction

DX = increment of depth, ft

NEL = total number of elements

NBX = number of nodal point at bottom of the foundation

$\text{DELTA}(i)$ = potential volumetric swell of soil element i , fraction

$e_f(i)$ = final void ratio of element i

$e_o(i)$ = initial void ratio of element i

The ΔH is the potential vertical heave beneath a flexible, unrestrained foundation. The bottom nodal point $NNP = NEL + 1$ is often set at the depth of the active zone. The program HEAVE assumes that $N = 1$. The fraction N should be 1 for one-dimensional consolidometer swell test results. The soil suction test results tend to provide an upper bound

* A table of factors for converting U. S. customary units of measurements to metric (SI) units is presented on page 3.

estimate of the maximum in situ heave for intact soil ($N = 1$) in part because the soil suction tests are performed without the horizontal restraint on soil swell that exists in the field and during consolidometer tests. Dividing the heave by 3 ($N = 1/3$) will tend toward a lower bound estimate for fissured soil (Richards 1967). Differential heave may be estimated by comparing the computed heaves for different soil strata, vertical loads, and equilibrium moisture profiles.

4. The program HEAVE computes the difference in void ratio Δe (i.e., $e_f - e_o$) from consolidometer swell test results of each soil layer by

$$\Delta e = c_s \log \frac{\sigma_s}{\sigma'_v} \quad (2)$$

where

c_s = swell index

σ_s = swell pressure, tsf

σ'_v = vertical effective pressure, tsf

The compression index c_c is substituted for c_s if σ'_v exceeds σ_s .

5. The program HEAVE computes Δe from soil suction test results of each soil layer by

$$\Delta e = C_\tau \log \frac{\tau_{mo}^o}{\tau_{mf}^o} \quad (3)$$

where

$C_\tau = \alpha G_s / 100B$, suction index

α = compressibility factor

G_s = specific gravity

B = slope soil suction parameter

τ_{mo}^o = initial matrix suction without surcharge pressure, tsf

τ_{mf}^o = final matrix suction without surcharge pressure, tsf

The compressibility factor α is the ratio of the change in volume for a corresponding change in water content and can be found by the procedure in TM 5-818-7. The B parameter is the slope of the matrix soil

suction-water content relationship expressed as

$$\log \tau_m^o = A - Bw \quad (4)$$

where

A = ordinate intercept soil suction parameter, tsf

w = water content, percent dry weight

6. The matrix suction τ_m^o is assumed to be related to the pore water pressure by

$$\tau_m^o = -u_w + \alpha \sigma_m \quad (5)$$

where

u_w = pore water pressure, tsf

σ_m = total mean normal confining pressure, tsf

The total mean normal confining pressure σ_m is given by

$$\sigma_m = \frac{(1 + 2K_T)}{3} \sigma_v \quad (6)$$

where

K_T = ratio of total horizontal to vertical stress in situ

σ_v = total vertical pressure, tsf

Equilibrium pore water pressure

7. The accuracy of the estimates of the potential vertical heave in simulating the maximum in situ heave depends heavily on the ability to properly estimate the equilibrium pore water pressure profile. Figure 1 indicates examples of extremes that can occur in the seasonal moisture profile. Seasonal heave between extreme wet and dry moisture profiles can be estimated by taking the difference between heaves computed for both extreme wet and dry profiles (Figure 1a), or the sum of the settlement for the wet profile and heave of the dry profile (Figure 1b). The program HEAVE considers the three following profiles illustrated in Figure 1.

8. Saturated profile. The saturated profile, Method 1, assumes that the in situ pore water pressure is zero within the active zone X_a of moisture change and heave

$$u_w = 0 \quad (7)$$

9. Hydrostatic I. The hydrostatic I profile, Method 2, assumes that the pore water pressure at depth X becomes more negative with increasing vertical distance above the groundwater level in proportion to the unit weight of water

$$u_w = \gamma_w(X - X_a) \quad (8)$$

where γ_w is the unit weight of water (0.0312 tcf).

10. Hydrostatic II. The hydrostatic II profile, Method 3, is similar to the hydrostatic I profile except that a shallow water table does not exist. The negative pore water pressure of this profile also becomes more negative with increasing vertical distance above the bottom of the active zone X_a in proportion to the unit weight of water

$$u_w = u_{wa} + \gamma_w(X - X_a) \quad (9)$$

where u_{wa} is the negative pore water pressure in tons per square foot at depth X_a in feet.

Depth of the active zone

11. The depth of the active zone X_a is defined as the least soil depth above which changes in water content and heave occur because of climate and environmental changes after construction of the foundation. The depth X_a may be estimated by procedures described in TM 5-818-7. Predictions of shaft movement can be made for the three cases of active depths shown in Table 1. The three cases are differentiated in program HEAVE by denoting the depths X_a and X_f where X_f is the depth of inactive or nonswelling soil overlying the swelling soil.

Effect of uplift forces

12. The program HEAVE ignores uplift thrust of swelling soils adjacent to slab or long continuous footings. The uplift thrust of adjacent swelling soils on deep foundations (Figure 2) is determined for the assumption that interaction of stresses between skin friction and end bearing is negligible and is expressed as

$$Q_u = \pi D_s \int_0^{L_n} f_s dL \quad (10)$$

where

Q_u = maximum uplift thrust on perimeter of shaft, tons

D_s = diameter of shaft, ft

L_n = thickness of the swelling layer moving up relative to the shaft, ft

f_s = skin resistance, tsf

dL = differential increment of shaft length L , ft

The point n in Figure 2 is the neutral point. The value of L_n should be approximately equal to the depth X_a . The maximum tension force T in the shaft is estimated from

$$T = Q_w - Q_u \quad (11)$$

where Q_w is the loading force from the structure and includes the weight of the shaft.

13. The skin friction f_s is evaluated by

$$f_s = c_a + K\sigma'_v \tan \phi_a \quad (12)$$

where

c_a = adhesion, tsf

K = ratio of horizontal to vertical effective stress

σ'_v = vertical effective stress, tsf

ϕ_a = angle of friction between the soil and shaft, deg

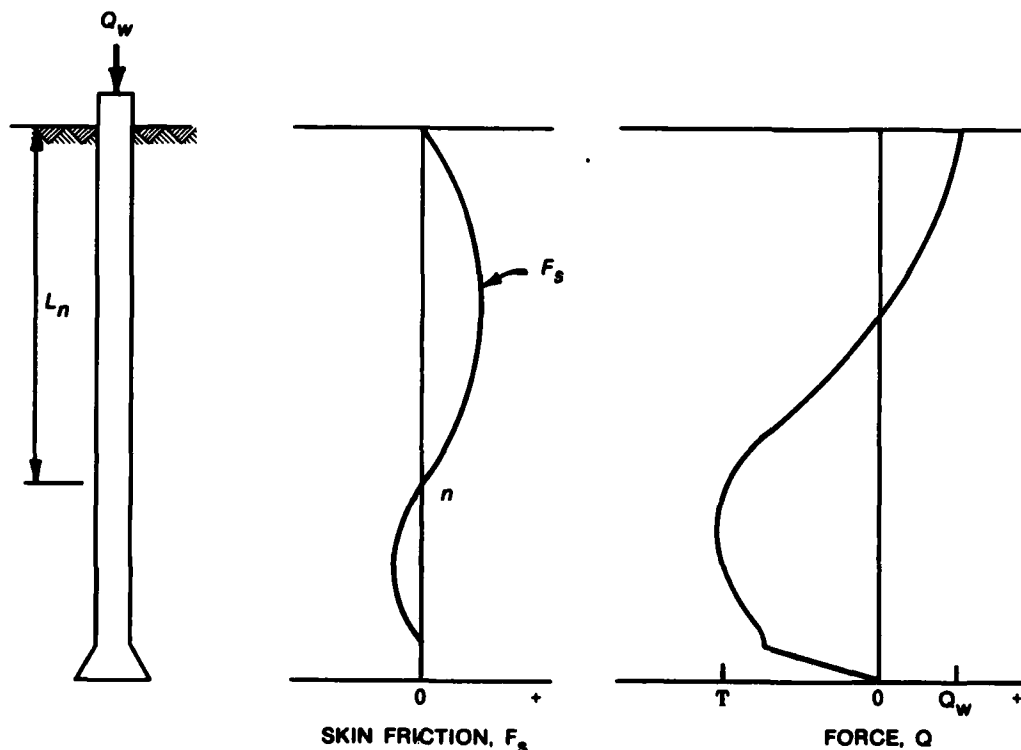


Figure 2. Distribution of load from uplift of swelling soil

If drained strength data are available, c_a is often set equal to zero and ϕ_a set equal to the effective angle of internal friction ϕ' of remolded soil or the strength at large strain. The skin friction based on undrained strength data is given by

$$f_s = \alpha_f c_u \quad (13)$$

where

α_f = reduction coefficient

c_u = undisturbed undrained shear strength, tsf

14. The program HEAVE computes the minimum percent steel A_s required if ASTM A 615 (1976) Grade 60 steel is used by the equation

$$\text{Percent } A_s = -0.03 \frac{T}{D_s^2} \quad (14)$$

where

T = negative tension force, tons

D_s = shaft diameter, ft

15. The bearing capacity of the soil above the underream is calculated in program HEAVE by the equation

$$q_b = cN_c + \sigma'_v N_q \quad (15)$$

where

q_b = bearing capacity above the underream, tsf

c = cohesion, tsf

σ'_v = effective vertical overburden pressure, tsf

N_c, N_q = bearing capacity factors

If undrained strength data are used, then $N_c = 7$ and $N_q = 0$. The cohesion c is the undrained shear strength c_u . If drained strength data are used, then the bearing capacity factors are calculated by program HEAVE by the following equations (Vesic 1977):

$$N_c = \cot \phi' (N_q - 1) \quad (16)$$

$$N_q = (1 + \tan \phi') e^{\tan \phi'} \tan^2 \left(45 + \frac{\phi'}{2} \right) \quad (17)$$

where ϕ' is the effective angle of shearing resistance. The cohesion c is the effective cohesion in Equation 15. Equation 17 is indicative of failure by the Terzaghi local shear mechanism and tends to represent a lower limit of the bearing capacity factor N_q .

16. The soil suction model described in TM 5-818-7 may also compute the effect of uplift as well as the consolidometer swell model if the swell pressure is input for each soil layer. If the swell pressure is not input, the program assumes that the swell pressure is given by the initial soil matrix suction, an assumption that can greatly exceed the swell pressure. Computed shaft uplift movements will be an upper limit because the shaft stiffness is assumed equal to the soil stiffness.

Bearing capacity

17. The program HEAVE computes the bearing capacity of the foundation soil assuming that Equations 15-17 are applicable. If undrained strength data are used, $N_c = 9$. The message

BEARING CAPACITY OF TSF EXCEEDED FOR ELEMENT

is printed if loading pressures exceed the computed bearing capacity of the given element.

Computer Program

18. The program consists of a main routine and five subroutines. The main routine feeds in the input data, calculates effective overburden pressure, determines the restraining force Q_r for a deep shaft foundation, and computes the foundation force beneath the shaft and tension force from uplift of adjacent swelling soils. The subroutine MECH applies the mechanical model for prediction of potential heave using the results of consolidometer swell tests. The subroutines SUCT and HSUCT apply the soil suction model. The subroutine PSAD sets up the proper depths in the soil profile for calculation of heave. The subroutine SLAB sets up the bearing pressure for slab and long continuous footings. The program is set to consider up to 10 different soils and a maximum of 80 soil elements. The capacity of the program may be increased by adjusting the PARAMETER statements.

Input data

19. The program was prepared for time-sharing on the Honeywell series G600 computer. The input data are entered in free field format as illustrated in Table 2. Descriptions of the input data are given in Table 3.

Output data

20. The output data are illustrated in Table 4. Descriptions of the output data are given in Table 5.

Example Applications

21. Three example problems are provided. All use the soil properties given in Table 6.

Slab in excavation

22. Table 7 illustrates the input data for a slab in an excavation 12 ft deep (Figure 3). The groundwater DGWT is 22 ft below ground surface or 10 ft below the slab. The mechanical model was used for a 100- by 100-ft slab. The output data are provided in Table 7 for a loading pressure of 0.072 tsf assuming a saturated final pore pressure profile at the center. Heave beneath the slab is 0.25 ft. Heave adjacent to the slab in soil above 12 ft of depth is 0.18 ft.

Long continuous footing

23. Table 8 illustrates the input data for an infinitely long continuous footing 100 ft wide on the ground surface (Figure 4) using the mechanical model. The groundwater level is 8 ft below the footing. The output data are provided in Table 8 for a loading pressure of 0.072 tsf assuming a saturated final pore pressure profile. The heave beneath this footing is 0.14 ft.

Circular shaft

24. Table 9 illustrates the input data for a circular shaft 30 ft deep and 2 ft in diameter with a 3-ft-diam underream (Figure 5) using the soil suction model with drained strength data. The active zone extends from the ground surface to 10 ft below the base of the shaft. A 10-ton loading force Q_w is placed on the shaft. The output data are provided in Table 9 assuming a saturated profile for the full 40 ft of active depth, X_a . The shaft heave of 1.16 ft is the maximum that a cracked shaft could rise excluding subsoil movement, while one-third of this heave or 0.4 ft is more likely in a fissured soil. The actual shaft heave will be less if no fracture results in the shaft. The maximum soil heave adjacent to the shaft is 1.3 ft. A gap could open beneath the bottom of the shaft. The maximum tension force of -166.5 tons will require 1.3 percent steel in the 2-ft-diam shaft.

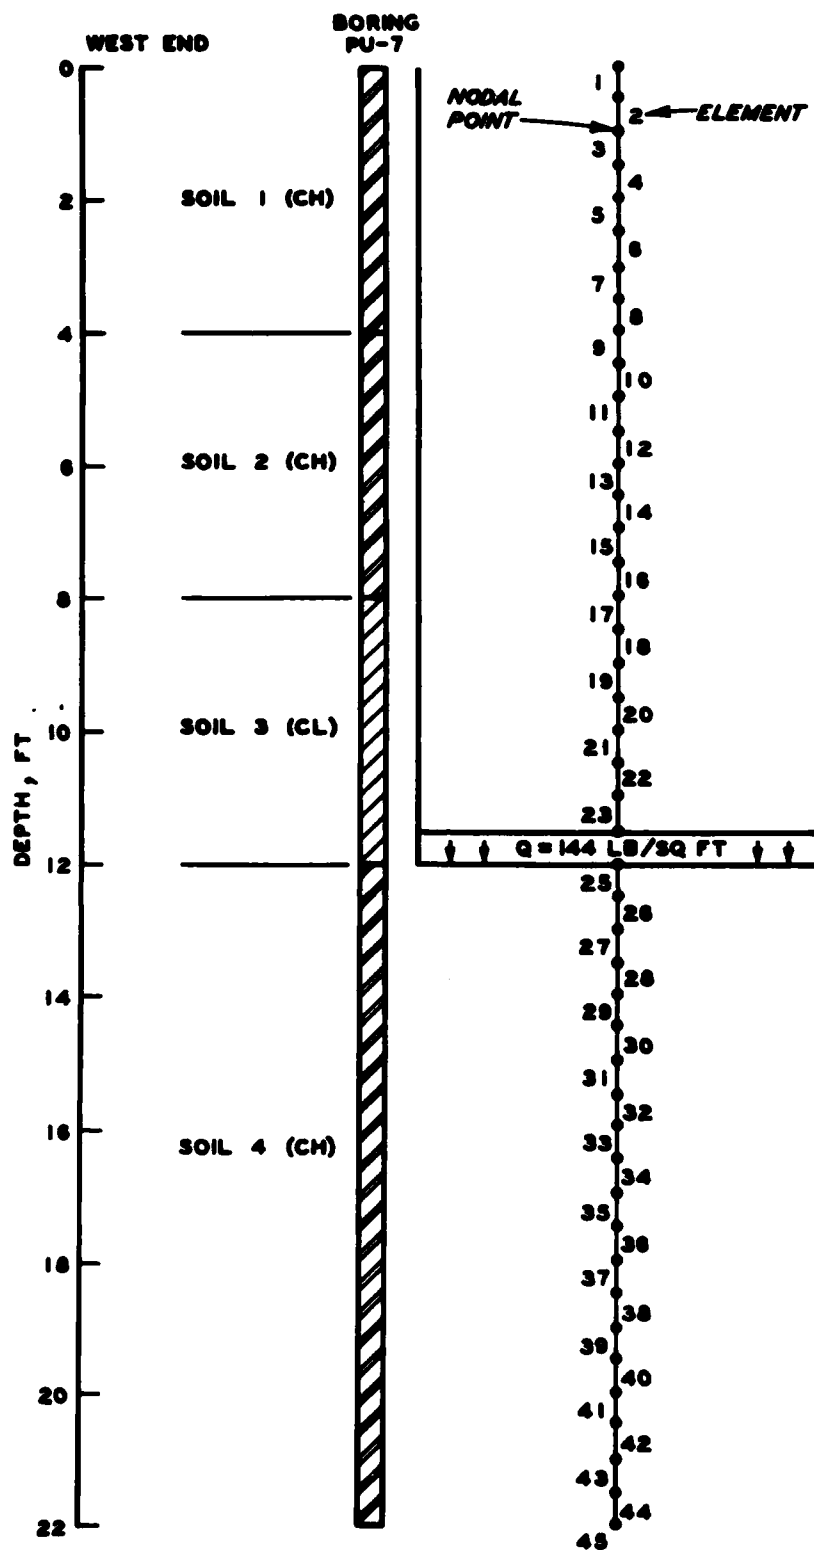


Figure 3. Slab foundation in excavation with deep water table ($X_g = 22$ ft)

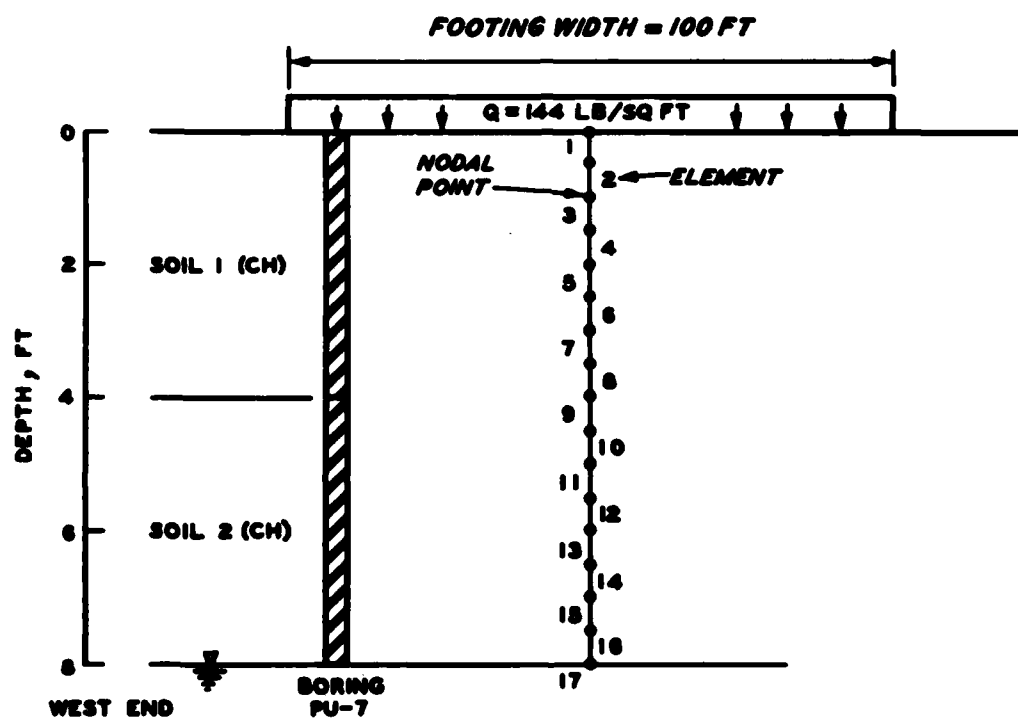


Figure 4. Long continuous footing at ground surface

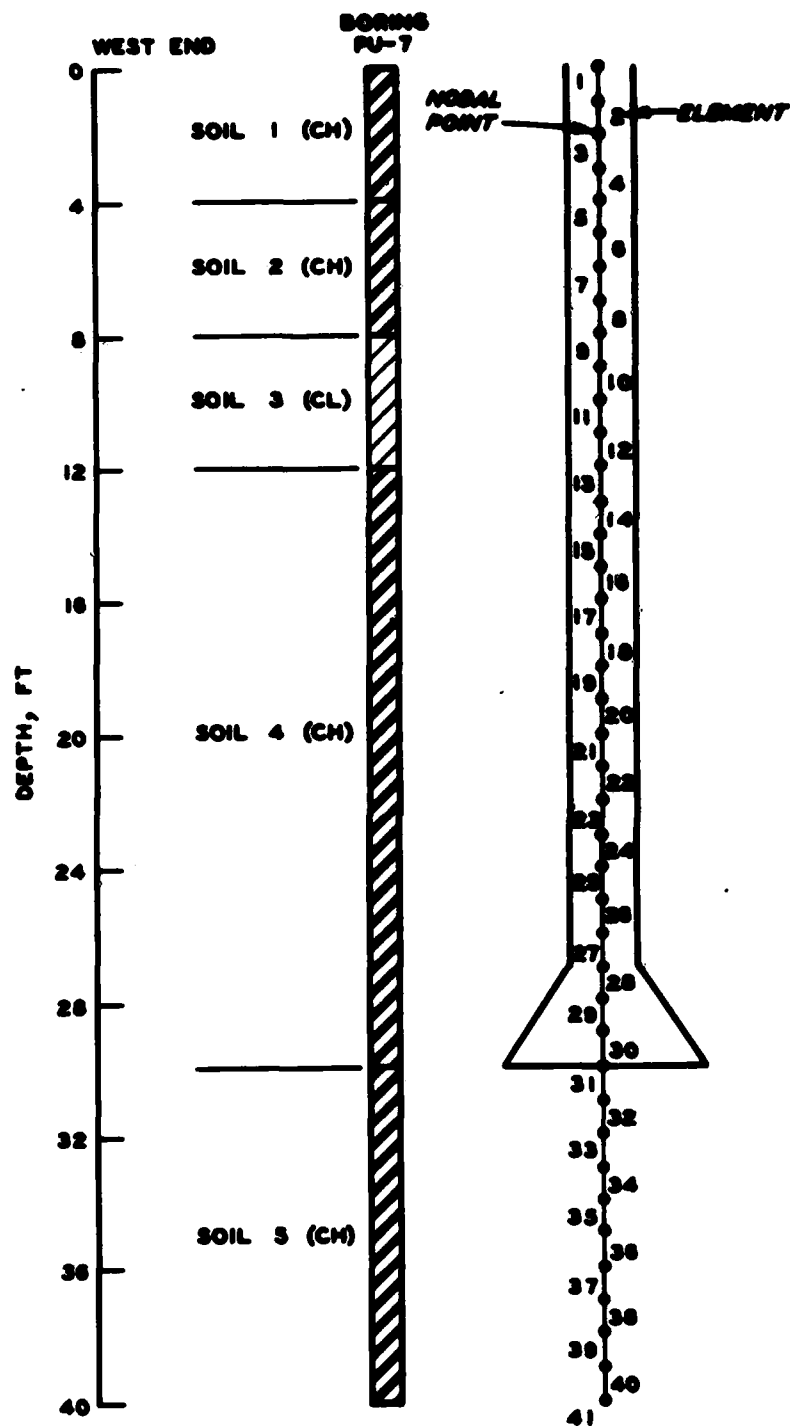


Figure 5. Shaft foundation 30 ft deep with active zone from ground surface to 40 ft deep

References

American Society for Testing and Materials (ASTM). 1976. "Deformed and Plain Billet Steel Bars for Concrete Reinforcement," Designation: A 615, Annual Book of ASTM Standards, Philadelphia, Pa.

Headquarters, Department of the Army. 1982. "Foundations in Expansive Soils," Technical Manual 5-818-7, Washington, D. C.

Johnson, L. D. 1981. "Field Test Sections on Expansive Soil," Technical Report GL-81-4, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.

Richards, B. G. 1967. "Moisture Flow and Equilibrii in Unsaturated Soils for Shallow Foundations," Permeability and Capillarity of Soils, Special Technical Publication 417, American Society for Testing and Materials, Philadelphia, Pa., pp 4-34.

Vesic, A. S. 1977. "Design of Pile Foundations," National Cooperative Highway Research Program, Synthesis of Highway Practice No. 42, Transportation Research Board, National Research Council, Washington, D. C.

Table 1
Prediction of Shaft Movement

Case	Mechanism of Uplift	Sketch	Equations*
1	The shaft is lifted when the uplift force Q_u given by $\sigma_s - \sigma'_v$ times the area A_{act} over which σ_s is active exceeds the restraining force Q_r . The shaft stops lifting when $Q_u < Q_r$ or the skin friction f_s times A_{act} is less than Q_r .		$\Delta_{shaft} \leq 0$ if $(\sigma_s - \sigma'_v)A_{act} \leq Q_r$ $\Delta_{shaft} \leq 0$ if $f_s A_{act} \leq Q_r$ $\Delta_{shaft} = X_a c_s \log \frac{\sigma_s}{Q_r/A_{act}}$ if $\sigma_s > \frac{Q_r}{A_{act}} > \sigma'_v$ $\Delta_{shaft} = X_a c_s \log \frac{\sigma_s}{\sigma'_v}$ if $\sigma_s > \sigma'_v > \frac{Q_r}{A_{act}}$ $\Delta_{soil} = X_a c_s \log \frac{\sigma_s}{\sigma'_v}$ $A_{act} = X_a \pi D_s$ $Q_r = Q_u + f_s (L - X_a) \pi D_s + q_b \frac{\pi}{4} (D_b^2 - D_s^2)$
2	Same as Case 1 except that soil from the ground surface to depth X_f does not swell and does not contribute to uplift. Case 2 converged to Case 1 when $X_f = 0$.		Same as Case 1
3	The shaft is lifted a distance equal to the vertical swelling of the soil beneath the shaft as wetting extends to the base of the shaft. The shaft is lifted further as soil wetting extends above the base when uplift force Q_u exceeds the restraining force Q_r . The shaft stops lifting when $Q_u < Q_r$ or $f_s A_{act} < Q_r$.		$\Delta_{shaft} \leq 0$ if $(\sigma_s - \sigma'_v)A_{act} < Q_r$ $\Delta_{shaft} \leq 0$ if $f_s A_{act} \leq Q_r$ $\Delta_{shaft} = (X_a - L)c_s \log \frac{\sigma_s}{\sigma'_v} + (L - X_f)c_s \log \frac{\sigma_s}{Q_r/A_{act}}$ if $\sigma_s > \frac{Q_r}{A_{act}} > \sigma'_v$ $\Delta_{shaft} = (X_a - X_f)c_s \log \frac{\sigma_s}{\sigma'_v}$ if $\sigma_s > \sigma'_v > \frac{Q_r}{A_{act}}$ $\Delta_{soil} = (X_a - X_f)c_s \log \frac{\sigma_s}{\sigma'_v}$ $A_{act} = (L - X_f)\pi D_s$ $Q_r = Q_u + q_b \frac{\pi}{4} (D_b^2 - D_s^2)$

* Notation:

- A_{act} = area over which swell pressure σ_s is active, ft^2
- c_s = swell index or suction index C_t , Equations 2 and 3
- D_b = diameter of underreamed base, ft
- D_s = diameter of shaft, ft
- f_s = skin friction found by Equations 12 and 13, tsf
- L = length of shaft, ft
- q_b = bearing capacity of soil above underream, tsf
- Q_r = force restraining uplift force of swelling soil, tons
- Q_u = uplift force $(\sigma_s - \sigma'_v)A_{act}$, tons
- Q_v = structural load on shaft including shaft weight, tons
- X_a = depth or thickness of active zone, ft
- X_f = depth of nonswelling soil from ground surface, ft
- Δ_{shaft} = movement of shaft, ft
- Δ_{soil} = movement of soil surrounding shaft, ft
- σ_s = soil swell pressure, tsf
- σ'_v = effective overburden pressure, tsf

Table 2
Input Data Format

Step	Data
1	The program will print: TITLE? = . Input description of the problem
2	The program will print after carriage return: NPROB, NSUCT, NBPRES, NNP, NBX, NMAT, DX = . Input the above variables (see Table 3 for definitions)
3	The program will print after carriage return: M, G, WC, EO, C, PHI, K = . Input the above variables
4A	If NSUCT = 0 , the program will print after carriage return: M, SP, CS, CC = . Input the above variables,
4B	If NSUCT = 1 , the program will print after carriage return: M, A, B, ALPHA, KT, PI, SP = . Input the above variables. If ALPHA left blank, then $\alpha = 0$ for $PI < 5$ $\alpha = 0.0275PI - 0.125$ for $5 < PI < 40$ $\alpha = 1$ for $PI > 40$ If SP left blank, the swell pressure will be assumed the initial matrix soil suction The program will repeat steps 3 and 4 until all soils from M = 1 to M = NMAT are input
5	The program will print after carriage return: ELEMENT, NO. OF SOIL = . Input 1,1 = . Input element, 2 for elements in increasing order for each increase in soil type M = . Input NEL, NMAT as the last and deepest element for soil type M = NMAT
6	The program will print after carriage return up to NPROB : XA, XF, DGWT, IOPTION, NOPT = . Input the above variables
7A	If NBPRES $\neq$ 1, the program will print after carriage return: Q, BLEN, BWID, LOCATION(CENTER=0, EDGE/CORNER=1) = . Input the above variables
7B	If NBPRES = 1, the program will print after carriage return: PLOAD, AF, DP, DB = . Input the above variables

Table 3
Description of Input Data

Symbol	Step	Description
<u>Type of Problem</u>		
NPROB	2	Number of cases with the same soil profile. Loads and foundation dimensions can be varied
NSUCT	2	Option for model: =0 for consolidation swell (MECH) model; =1 for soil suction model
NSPRES	2	Option for foundation: =1 for circular or shaft; =2 for rectangular slab; =3 for long continuous
NMP	2	Total number of nodal points, $NEL + 1$
NBX	2	Number of nodal point at the bottom of the foundation
NMAT	2	Total number of different soil layers
DK	2	Increment of depth, ft
<u>Physical Properties</u>		
N	3	Number of soil layer
G	3	Specific gravity G_s of soil layer N
WC	3	Initial water content w_o of soil layer N, percent
EO	3	Initial void ratio e_o of soil layer N
C	3	Soil effective cohesion c' or undrained shear strength c_u , tsf
PHI	3	Effective angle of internal friction ϕ' ; = 0 if $C = c_u$
K	3	Ratio of horizontal to vertical effective pressure $K/K = 1.0$ if left blank
<u>Swell Characterization by the Consolidation Swell (MECH) Model</u>		
N	4A	Number of soil layer
SP	4A	Swell pressure σ_s of soil layer N, tsf
CS	4A	Swell index c_s of soil layer N
CC	4A	Compression index c_c of soil layer N
<u>Swell Characterization by the Soil Suction (SUCT) Model</u>		
N	4B	Number of soil layer
A	4B	Intercept of log suction and water content relationship of soil layer N, tsf
S	4B	Slope of log suction and water content relationship of soil layer N
ALPHA	4B	Compressibility factor α of soil layer N
KT	4B	Ratio of total horizontal to vertical pressure K_v of soil layer N
PI	4B	Plasticity index PI of soil layer N, percent
SP	4B	Swell pressure σ_s of soil layer N, tsf. $\sigma_s = \tau_m^2$ if left blank
<u>Element Characterization</u>		
ELEMENT	5	Number of soil element
NO. of Soil	5	Number of soil layer N
NEL	5	Total number of soil elements
NMAT	5	Total number of soil layers
<u>Equilibrium Moisture Profile</u>		
XA	6	Depth of the active zone X_a , ft. Movement beneath the foundation assumes the equilibrium moisture profile extends down to the bottom nodal point NMP
XF	6	Depth from ground surface to the depth that the active zone begins X_f , ft
DGWT	6	Depth to the groundwater table, ft. DGWT is set internally to the depth of nodal point NMP if IOPTION > 1
IOPTION	6	Equilibrium moisture profile: =0 for saturation (Equation 7); =1 for hydrostatic I (Equation 8); to simulate Equation (9), set IOPTION = 1 and DGWT = $X_a - \alpha_a/v_u$ or IOPTION = 2 if NREACT = 1; if IOPTION = 3 and NSUCT = 1, the final total soil suction without surcharge pressure τ_m^2 is input for each soil layer
NOPT	6	Option for amount of output: =0 for forces (if NRPRES = 1) and total heave; =1 for forces, total heave, and the fraction and excess pore pressure at each depth interval
<u>Loading and Dimensions of Foundation</u>		
Q	7A	Foundation and superstructure pressure, tsf
BLEW	7A	Radius of circular foundation (NRPRES = 1); length of slab (NRPRES = 2); =0.0 for long continuous (NRPRES = 3), ft
BWID	7A	0.0 for circular foundation; width of slab; width of long continuous footing, ft
LOCATION	7A	=0 for center of rectangular slab or long continuous footing; =1 for corner of slab or edge of long continuous footing. Not used for circular foundation where only center results printed
FLOAD	7B	Loading force on circular shaft including weight of shaft Q_s , tons
AF	7B	Reduction factor of skin friction term α_f (Equation 13)
DS	7B	Diameter of shaft D_s , ft
DB	7B	Diameter of base or underream D_b , ft

Table 4
Output Data Format

Line	Data			
	<u>NBPRES $\neq$ 1</u>			
1	(If NOPT = 1)			
	ELEMENT	DEPTH,FT	DELTA HEAVE,FT	EXCESS PORE PRESSURE,TSF
2	SOIL HEAVE NEXT TO FOUNDATION EXCLUDING SUBSOIL=			FEET
3	SUBSOIL MOVEMENT=			FEET
4	TOTAL SOIL MOVEMENT=			FEET
	<u>NBPRES = 1</u>			
1	FORCE RESTRAINING UPLIFT=		EXCESS=	TONS
2	SHAFT HEAVE (EXCLUDING SUBSOIL MOVEMENT)=			FEET
3	FORCE AT BOTTOM OF SHAFT=		TENSION=	TONS
			AREA STEEL=	PERCENT
4	(If NOPT = 1)			
	ELEMENT	DEPTH,FT	DELTA HEAVE,FT	EXCESS PORE PRESSURE,TSF
5	SOIL HEAVE NEXT TO FOUNDATION EXCLUDING SUBSOIL=			FEET
6	SUBSOIL MOVEMENT=			FEET
7	TOTAL SOIL MOVEMENT=			FEET
8	TOTAL SHAFT MOVEMENT=			FEET

Table 5
Description of Output Data

Symbol	Description
ELEMENT	Number of element
DEPTH, FT	Depth of center of element, ft
DELTA HEAVE, FT	Heave of increment (element) ΔH , ft
EXCESS PORE PRESSURE, TSF	Initial negative pore pressure exceeding equilibrium pressure, tsf
SOIL HEAVE NEXT TO FOUNDATION EXCLUDING SUBSOIL	Movement of adjacent soil above bottom of foundation, ft
SUBSOIL MOVEMENT	Movement of soil beneath foundation, ft
TOTAL SOIL MOVEMENT	Total heave of soil adjacent to foundation, ft
FORCE RESTRAINING UPLIFT EXCESS	Force restraining uplift Q_r , tons $Q_r - Q_u$ where Q_u = uplift force, tons
SHAFT HEAVE (EXCLUDING SUBSOIL MOVEMENT)	Movement of shaft excluding soil movement beneath shaft, ft
FORCE AT BOTTOM OF SHAFT	Force exerted on soil beneath the shaft (positive quantity), tons
TENSION	Maximum tension in shaft (negative quantity), tons
AREA STEEL	Percent steel from Equation 14 assuming ASTM A615 Grade 60 steel is used. The minimum steel should be 1 percent although the computed steel may be less.
TOTAL SHAFT MOVEMENT	Total movement of shaft, ft

Note: Positive values represent upward movement or compression force while negative values represent downward movement or tension force.

Table 6
Soil Properties for Example Problems

Depth, ft	Strength Parameters										Suction Parameters				Atterberg Limits	
	G s	w _o , %	e _o	c _u	c, tsf	φ, deg	K	σ _s , tsf	c _s	c _c	Suction Parameters			LL	PI	
											A	B	α			K _T
0-4	2.70	23.0	0.800	0.5		20	1.0	2.20	0.045	0.27	6.75	0.25	1.00	1.0	57	39
4-8	2.70	25.0	0.745	0.5		20	1.0	0.66	0.045	0.27	6.75	0.25	1.00	1.0	60	40
8-12	2.75	30.0	0.825	1.0		30	1.0	0.70	0.030	0.27	5.04	0.17	0.26	1.0	49	14
12-30	2.76	29.0	0.828	2.0	1.0	10	2.0	2.40	0.052	0.20	5.86	0.18	1.00	2.0	75	55
30-	2.76	29.0	0.828	2.0	1.0	10	2.0	2.85	0.048	0.13	6.14	0.19	1.00	2.0	80	55

Table 7
Input and Output Data for Slab in Excavation

Input Data

```

SYSTEM TFORT
OLD OR NEW-OLD HEAVE
READY
*RUN
=SLAB IN EXCAVATION, DGWT = 22 FT      MECH
NPROB, NSUCT, NBPRES, NNP, NBX, NMAT, DX
=3, 0, 2, 45, 25, 4, .5
M, G, WC, EO, C, PHI, K
=1, 2, 7, 23, ., .8, ., .
X, ALL, SP, CS, CC
=1, 57, ., 2, 2, ., 045, ., 27
M, G, WC, EO, C, PHI, K
=2, 2, 7, 25, ., .745, ., .
M, ALL, SP, CS, CC
=2, 60, ., .66, ., 045, ., 27
M, G, WC, EO, C, PHI, K
=3, 2, 75, 30, ., .825, ., .
M, ALL, SP, CS, CC
=3, 49, ., .7, ., 03, ., 27
M, G, WC, EO, C, PHI, K
=4, 2, 76, 29, ., .828, ., .
M, ALL, SP, CS, CC
=4, 75, ., 2, 4, ., 052, ., 2
ELEMENT, NO. OF SOIL
=1, 1
=9, 2
=17, 3
=25, 4
=44, 4

XA, XF, DGWT, IOPTION, NOPT
=22, ., .0, 22, ., 0, 1

Q, BLEN, BWID, LOCATION (CENTER=0, EDGE/CORNER=1)
=.072, 100, ., 100, ., 0

```

(Continued)

Table 7 (Concluded)

Output Data

ELEMENT	DEPTH, FT	DELTA HEAVE, FT	EXCESS PORE PRESSURE, TSF
1	0.25	0.05459	2.18559
2	0.75	0.04266	2.15676
3	1.25	0.03712	2.12793
4	1.75	0.03346	2.09910
5	2.25	0.03073	2.07027
6	2.75	0.02856	2.04145
7	3.25	0.02674	2.01262
8	3.75	0.02519	1.98379
9	4.25	0.01107	0.41426
10	4.75	0.00977	0.38404
11	5.25	0.00860	0.35382
12	5.75	0.00755	0.32360
13	6.25	0.00658	0.29338
14	6.75	0.00570	0.26316
15	7.25	0.00488	0.23294
16	7.75	0.00411	0.20272
17	8.25	0.00258	0.21231
18	8.75	0.00215	0.18170
19	9.25	0.00174	0.15109
20	9.75	0.00135	0.12049
21	10.25	0.00098	0.08988
22	10.75	0.00063	0.05927
23	11.25	0.00030	0.02866
24	11.75	0.00437	0.32068
25	12.25	0.04095	2.31278
26	12.75	0.03725	2.28235
27	13.25	0.03441	2.25191
28	13.75	0.03210	2.22146
29	14.25	0.03016	2.19101
30	14.75	0.02847	2.16054
31	15.25	0.02699	2.13005
32	15.75	0.02567	2.09955
33	16.25	0.02448	2.06902
34	16.75	0.02338	2.03847
35	17.25	0.02238	2.00790
36	17.75	0.02145	1.97729
37	18.25	0.02059	1.94666
38	18.75	0.01978	1.91599
39	19.25	0.01902	1.88528
40	19.75	0.01830	1.85454
41	20.25	0.01763	1.82375
42	20.75	0.01698	1.79292
43	21.25	0.01637	1.76205
44	21.75	0.01578	1.73113

SOIL HEAVE, FT: ADJACENT TO FOUNDATION= 0.17570 SUBSOIL= 0.24608

Table 8
Input and Output Data for Long Continuous
Footing on Ground Surface

Input Data

```
=LONG CONTINUOUS ON GROUND SURFACE,  DGWT = 8 FT  MECH
NPROB,NSUCT,NBPRES,NNP,NBX,NMAT,DX
=2,0,3,17,1,2,.5
M,G,WC,EO,C,PHI,K
=1,2.7,23.,.8,,,
M,ALL,SP,CS,CC
=1,57.,2.2,.045,.27
M,G,WC,EO,C,PHI,K
=2,2.7,25.,.745,,,
M,ALL,SP,CS,CC
=2,60.,.66,.045,.27
ELEMENT,NO. OF SOIL
=1,1
=9,2
=16,2

XA,XF,DGWT,IOPTION,NOPT
=8.,.0,8.,0,1

Q,BLEN,BWID,LOCATION(CENTER=0,EDGE/CORNER=1)
=.072,.0,100.,1
```

Output Data

ELEMENT	DEPTH,FT	DELTA HEAVE,FT	EXCESS PORE PRESSURE,TSF
1	0.25	0.03832	2.13549
2	0.75	0.03432	2.10679
3	1.25	0.03141	2.07809
4	1.75	0.02911	2.04939
5	2.25	0.02722	2.02068
6	2.75	0.02561	1.99198
7	3.25	0.02420	1.96328
8	3.75	0.02296	1.93458
9	4.25	0.00903	0.36518
10	4.75	0.00794	0.33508
11	5.25	0.00694	0.30498
12	5.75	0.00603	0.27489
13	6.25	0.00519	0.24479
14	6.75	0.00441	0.21469
15	7.25	0.00367	0.18459
16	7.75	0.00299	0.15450

SOIL HEAVE,FT: ADJACENT TO FOUNDATION= 0. SUBSOIL= 0.13968

*BYE

**resources used \$ 2.83, used to date \$ 589.92= 29%

**time sharing off at 10.481 on 06/04/80

Table 9
Shaft Foundation 30 Feet Deep

Input Data

```

RUN
=SHAFT FOUNDATION, DGWT = 40 FT   SUCT   DRAINED DATA
NPROB, NSUCT, NBPRES, NNP, NBX, NMAT, DX
=11, 1, 1, 41, 31, 5, 1.
M, G, WC, EO, C, PHI, K
=1, 2.7, 23., .8, .0, 20., 1.
M, A, B, ALPHA, AKO, PI
=1, 6.75, .25, 1., 1., 39.
M, G, WC, EO, C, PHI, K
=2, 2.7, 25., .745, .0, 20., 1.
M, A, B, ALPHA, AKO, PI
=2, 6.75, .25, 1., 1., 40.
M, G, WC, EO, C, PHI, K
=3, 2.75, 30., .825, .0, 30., 1.
M, A, B, ALPHA, AKO, PI
=3, 5.04, .17, .26, 1., 14.
M, G, WC, EO, C, PHI, K
=4, 2.76, 29., .828, 1., 10., 2.
M, A, B, ALPHA, AKO, PI
=4, 5.86, .18, 1., 2., 55.
M, G, WC, EO, C, PHI, K
=5, 2.76, 29., .828, 1., 10., 2.
M, A, B, ALPHA, AKO, PI
=5, 6.14, .19, 1., 2., 55.
ELEMENT, NO. OF SOIL
=1, 1
=5, 2
=9, 3
=13, 4
=31, 5
=40, 5

XA, XF, DGWT, IOPTION, NOPT
=40., .0, 40., 0, 1

PLOAD, AF, DP, DB
=10., 1., 2., 3.

```

(Continued)

Table 9 (Concluded)

FORCE RESTRAINING UPLIFT= 55.758 EXCESS= -120.696 TONS

SHAFT HEAVE= 1.16250 FEET

FORCE AT BOTTOM OF SHAFT= -166.454 TENSION= -166.454 TONS

ELEMENT	DEPTH,FT	DELTA HEAVE,FT	EXCESS PORE PRESSURE,TSF
1	0.50	0.15241	9.97117
2	1.50	0.12378	9.91352
3	2.50	0.11047	9.85586
4	3.50	0.10171	9.79820
5	4.50	0.06707	2.90143
6	5.50	0.06146	2.84099
7	6.50	0.05683	2.78055
8	7.50	0.05288	2.72011
9	8.50	0.01048	0.56546
10	9.50	0.01783	0.72427
11	10.50	0.01680	0.70835
12	11.50	0.01586	0.69244
13	12.50	0.06457	3.62349
14	13.50	0.04282	3.01758
15	14.50	0.04017	2.91613
16	15.50	0.03771	2.81469
17	16.50	0.03540	2.71325
18	17.50	0.03323	2.61181
19	18.50	0.03118	2.51036
20	19.50	0.02924	2.40892
21	20.50	0.02740	2.30748
22	21.50	0.02564	2.20603
23	22.50	0.02397	2.10459
24	23.50	0.02237	2.00315
25	24.50	0.02084	1.90171
26	25.50	0.01937	1.80026
27	26.50	0.01796	1.69882
28	27.50	0.01660	1.59738
29	28.50	0.01529	1.49593
30	29.50	0.01402	1.39449
31	30.50	0.01133	1.19369
32	31.50	0.01021	1.09224
33	32.50	0.00912	0.99080
34	33.50	0.00807	0.88936
35	34.50	0.00705	0.78791
36	35.50	0.00606	0.68647
37	36.50	0.00509	0.58503
38	37.50	0.00415	0.48359
39	38.50	0.00324	0.38214
40	39.50	0.00235	0.28070

SOIL HEAVE,FT: ADJACENT TO FOUNDATION= 1.30535 SUBSOIL= 0.06666

APPENDIX A: PROGRAM LISTING

```

1000C PREDICTION OF HEAVE - HEAVE
1010C BASED ON CONSTANT VOLUME SWELL/SWELL OVERBURDEN/SUCTION
1020C DEVELOPED BY L. D. JOHNSON
1030  PARAMETER NL=10,NQ=81
1040  COMMON A(NL),B(NL),G(NL),WC(NL),EO(NL),SP(NL),AK(NL),CS(NL),
1050  CC(NL),ALPHA(NL),AKO(NL),P(NQ),IE(NQ,1),N1,N2,NBX,NEL,IOPTION,
1060  NOPT,DX,DXX,DGWT,PII,XA,XF,DELH,DELH1,DELH2
1080  DIMENSION PP(NQ),PI(NL),C(NL),PHI(NL)
1085  PRINT 1
1086  1 FORMAT(6HTITLE?)
1090  READ 3
1100  3  FORMAT(30H
1110  GAW=0.03125
1120  PII=3.14159265
1130  NP=1
1140  PRINT 5
1150  5  FORMAT(34HNPROB,NSUCT,NBPRES,NNP,NBX,NMAT,DX)
1160  READ,NPROB,NSUCT,NBPRES,NNP,NBX,NMAT,DX
1170  NEL=NNP-1
1180  14 PRINT 10
1190  10  FORMAT(17HM,G,WC,EO,C,PHI,K)
1200  READ,M,G(M),WC(M),EO(M),C(M),PHI(M),AK(M)
1210  PHI(M)=PHI(M)*PII/180.
1215  IF(AK(M).LT.0.01)AK(M)=1.0
1220  IF(NSUCT.EQ.1)GO TO 25
1230  PRINT 12
1240  12  FORMAT(10HM,SP,CS,CC)
1250  READ,M,SP(M),CS(M),CC(M)
1260  GO TO 20
1270  25  PRINT 8
1280  8  FORMAT(20HM,A,B,ALPHA,KT,PI,SP)
1290  READ,M,A(M),B(M),ALPHA(M),AKO(M),PI(M),SP(M)
1300  IF(ALPHA(M).LE.0.)GO TO 16
1310  GO TO 20
1320  16  ALPHA(M)=.0275*PI(M)-.125
1330  IF(PI(M).LE.5.)ALPHA(M)=0.0
1340  IF(PI(M).GE.40.)ALPHA(M)=1.
1350  20  IF(NMAT-M)26,27,14
1360  26  PRINT 17,M
1370  17  FORMAT(20H  ERROR IN MATERIAL ,I5)
1380  STOP
1390  27  L=0
1400  PRINT 30
1410  30  FORMAT(19HELEMENT,NO. OF SOIL)
1420  40  READ,N,IE(N,1)
1430  50  L=L+1
1440  IF(N-L)60,60,70
1450  70  IE(L,1)=IE(L-1,1)
1460  GO TO 50
1470  60  IF(NEL-L)80,80,40
1480  80  CONTINUE
1490  PRINT 81

```

```

1500 81 FORMAT(/,23HXA,XF,DGWT,IOPTION,NOPT)
1510 READ,XA,XF,DGWT,IOPTION,NOPT
1515 IF(NSUCT.EQ.0.AND.IOPTION.GT.1)PRINT 85
1517 85 FORMAT(30HIOPTION TOO LARGE; IOPTION = ?)
1518 IF(NSUCT.EQ.0.AND.IOPTION.GT.1)READ,IOPTION
1519 IF(IOPTION.GT.1)DGWT=FLOAT(NEL)*DX
1520 IF(NBPRES.EQ.1)GO TO 89
1530 PRINT 86
1540 86 FORMAT(/,44HQ,BLEN,BWID,LOCATION(CENTER=0,EDGE/CORNER=1))
1550 READ,Q,BLEN,BWID,MRECT
1560 GO TO 91
1570 89 PRINT 90
1580 90 FORMAT(/,14HPLOAD,AF,DP,DB)
1590 READ,PLOAD,AF,DP,DB
1592 IF(DP.GT.DB)PRINT 88
1593 88 FORMAT(51HDIAH SHAFT TOO LARGE; DIAM SHAFT = ?, DIAM BASE = ?)
1594 IF(DP.GT.DB)READ,DP,DB
1600 91 IF(IOPTION.LT.3)GO TO 92
1610 PRINT 101
1620 101 FORMAT(31H MATERIAL NO,FINAL TOTAL SUCTION)
1630 102 READ,M,CC(M)
1640 IF(NMAT-M)103,92,102
1650 103 PRINT 105,M
1660 105 FORMAT(20H ERROR IN MATERIAL ,I5)
1670 GO TO 102
1690C CALCULATION OF EFFECTIVE OVERBURDEN PRESSURE
1700 92 P(1)=0.0
1710 PP(1)=0.0
1720 DX=DX
1730 DO 100 I=2,NNP
1740 MTYP=IE(I-1,1)
1750 MCC=WC(MTYP)/100.
1760 GAMB=G(MTYP)*GAW*(1.+MCC)/(1.+EO(MTYP))
1770 IF(DXX.GT.DGWT)GAMB=GAMB-GAW
1780 P(I)=P(I-1)+DX*GAMB
1790 PP(I)=P(I)
1800 DXX=DXX+DX
1810 100 CONTINUE
1820 IF(NSUCT.GT.0.AND.IOPTION.EQ.2)GO TO 111
1830 GO TO 112
1840 111 MATNEL=IE(NEL,1)
1845 IF(AKO(MATNEL).LT.0.01)AKO(MATNEL)=AK(MATNEL)
1850 F=(1.+2.*AKO(MATNEL))/3.
1860 TFI=A(MATNEL)-B(MATNEL)*WC(MATNEL)
1870 TFI=10.*TFI
1872 ALP=ALPHA(MATNEL)
1874 IF(DGWT.LT.FLOAT(NEL)*DX)ALP=1.0
1880 TFI=TFI-P(NNP)*F*ALPHA(MATNEL)
1890 112 DXX=0.0
1900 DO 114 I=1,NNP
1910 AI=I-1
1920 BN=DGWT/DX-AI

```

```

1930      IF(NSUCT.EQ.0.AND.DXX.LT.DBWT.AND.IOPTION.EQ.1)P(I)=P(I)+
1940      BN*DX*GBW
-----
1950      IF(NSUCT.EQ.0)GO TO 113
1955      IF(I.EQ.1)HTYP=IE(1,1)
1957      IF(I.GT.1)HTYP=IE(I-1,1)
-----
1970      ALP=ALPHA(HTYP)
1975      IF(DXX.GT.DBWT)ALP=1.0
1980      TF=0.0
-----
1990      IF(IOPTION.EQ.1.AND.DXX.LT.DBWT)TF=BN*DX*GBW
2000      IF(IOPTION.EQ.2)TF=TFI+(FLOAT(NEL)*DX-DXX)*GBW
2005      IF(AKO(HTYP).LT.0.01)AKO(HTYP)=AK(HTYP)
-----
2010      F=(1.+2.*AKO(HTYP))/3.
2020      IF(IOPTION.EQ.3)TF=CC(HTYP)-P(I)*F*ALP
2040      P(I)=TF+P(I)*F*ALP
-----
2050      IF(P(I).LT.0.0)PRINT 116,P(I),I
2060 116  FORMAT(31HNEGATIVE FINAL EFFECTIVE STRESS,F10.5,
2070      12H  IN ELEMENT,I5)
2080 113  DXX=DXX+DX
-----
2090 114  CONTINUE
2100      IF(NBPRES.GT.1)CALL SLAB(Q,NSUCT,BLEN,BWID,MRECT,NBPRES,PP(NBX))
2110      IF(NBPRES.GT.1)GO TO 210
2120C    CALCULATION OF RESTRAINING FORCE
2130      CON=DX*PII*DP*AF
-----
2140      P1=0.0
2150      PR1=0.0
2160      PS1=0.0
-----
2170      AN1=XA/DX
2180      N1=IFIX(AN1)+1
2190      N2=NBX-1
-----
2200      IF(N1.GE.N2)GO TO 122
2210      DO 120 I=N1,N2
2220      HTYP=IE(I,1)
-----
2230      PH=PHI(HTYP)
2240      TA=SIN(PH)/COS(PH)
2250      IF(NSUCT.EQ.0.OR.SP(HTYP).GT.0.01)GO TO 115
-----
2260      TAU1=A(HTYP)-B(HTYP)*WC(HTYP)
2270      SP(HTYP)=10.*TAUI
2280 115  PS1=PS1+SP(HTYP)*CON
-----
2290      PR=(PP(I)+PP(I+1))/2.
2300      PR1=PR1+PR*CON
2310      P1=P1+(PR*TA*AK(HTYP)+C(HTYP))*CON
-----
2320 120  CONTINUE
2330 122  MAT=IE(NBX-1,1)
2340      QBU=7.*C(MAT)
-----
2350      IF(PHI(MAT).LT.0.001)GO TO 125
2360      PH=PHI(MAT)
2370      TA=SIN(PH)/COS(PH)
-----
2380      XNQ=(PH/2.)*45.*PI/180.
2390      XNQ=(1.+TA)*EXP(TA)*(SIN(XNQ)/COS(XNQ))*2.
2400      XNC=(XNQ-1.)/TA
-----
2410      QBU=C(MAT)*XNC+P(NBX)*XNQ
2420 125  PRE=LOAD+P1+QBU*PII*(DB**2.-DP**2.)/4.

```

```

2430      PRF=PRE/((FLOAT(N2)*DX-XF)*PII*DP)
2440C  CALCULATION OF EXCESS RESTRAINING FORCE AT BOTTOM OF PIER
2450      P2=0.0
2460      DELAV=0.0
2470      PR2=0.0
2480      PR3=0.0
2490      PS2=0.0
2500      CALL PSAD
2510      DO 150 I=N1,N2
2520          MYP=IE(I,1)
2530          PH=PHI(MYP)
2540          TA=SIN(PH)/COS(PH)
2550          IF(NSUCT.EQ.0)GO TO 145
2560          CS(MYP)=ALPHA(MYP)*SB(MYP)/(100.*SB(MYP))
2570          TAU1=A(MYP)-B(MYP)*WC(MYP)
2575          IF(SP(MYP).GT.0.01)GO TO 145
2580          SP(MYP)=10.*TAU1
2590      145  PS2=PS2+SP(MYP)*CON
2600          PR=(PP(I)+PP(I+1))/2.
2610          PRR=(P(I)+P(I+1))/2.
2620          PR2=PR2+PR*CON
2630          CT=CS(MYP)
2640          IF(PRR.GT.SP(MYP).AND.NSUCT.EQ.0)CT=CC(MYP)
2650          CT=CT/(1.+EQ(MYP))
2660          IF(PRR.LT.PRF)PRR=PRF
2670          CA=SP(MYP)/PRR
2680          DEL=CT*ALOG10(CA)*DX
2690          IF(DEL.LT.0.0.AND.DXX.GT.DGWT.AND.NSUCT.GT.0)DEL=DEL/ALPHA(MYP)
2700          IF(DEL.LT.0.0.AND.IOPTION.LT.2.AND.NSUCT.GT.0)DEL=DEL/ALPHA(MYP)
2710          P2=P2+(PR*TA*AK(MYP)+C(MYP))*CON
2720          DELAV=DELAV+DEL
2730      150  CONTINUE
2740          PST=PS1+PS2
2750          PRT=PR1+PR2
2760          CAT=P1+P2
2770          DPSR=PS2-PR2
2780          Q=PRE-DPSR
2790          IF(DPSR.GT.P2)Q=PRE-P2
2800          PRINT 160,PRE,Q
2810      160  FORMAT(/,25HFORCE RESTRAINING UPLIFT=,F10.3,4H EXCESS=,
2820      F10.3,6H TONS)
2830          IF(Q.GT.0.0)DELAV=0.0
2840          PRINT 162,DELAV
2850      162  FORMAT(41HSHAFT HEAVE (EXCLUDING SUBSOIL MOVEMENT)=,
2852      F13.5,6H FEET)
2860C  CALCULATION OF FOUNDATION PRESSURE BENEATH FOOTING
2870          PSTPRT=PST-PRT
2880          QQ=PLOAD-PSTPRT
2890          IF(PSTPRT.GT.CAT)QQ=PLOAD-CAT
2895          IF(QQ.LT.0.0)QQ=0.00000
2900          T=PLOAD-DPSR
2910          IF(DPSR.GT.P2)T=PLOAD-P2

```

```

2915 IF(T.BY.0.0)T=0.00000
2920 PRINT 170,QQ,T
2930 170 FORMAT(25HFORCE AT BOTTOM OF SHAFT=,F10.3,9H TENSION= ,
2940 F10.3,6H TONS)
2942 IF(T.LT.-0.0001)ASTEEL=-0.03*T/DP**2.
2944 IF(T.LT.-0.0001)PRINT 180,ASTEEL
2946 180 FORMAT(34X,11HAREA STEEL=,F10.3,9H PERCENT)
2950 IF(QQ.LE.0.01)GO TO 290
2960 BPRES=QQ+PP(NBX)*.7854*(DB**2.-DP**2.)
2970 BPRES=BPRES/((.7854*DB**2.)-PP(NBX))
2975 BPRES=BPRES
2980 DXX=0.0
2990 DO 200 I=NBX,NNP
3000 IF(I.EQ.NBX)GO TO 201
3005 MTP=IE(I-1,1)
3006 IF(NSUCT.EQ.1)ALP=ALPHA(MTP)
3007 IF(NSUCT.EQ.1.AND.DXX.GT.DGWT)ALP=1.0
3008 IF(NSUCT.EQ.1)BPRES=BPRES*ALP*(1.+2.*AKO(MTP))/3.
3010 TP=1.+(DB/(2.*DXX))**2.
3020 TP=TP**1.5
3030 P(I)=P(I)+BPRES*(1.-1./TP)
3040 GO TO 205
3050 201 P(I)=P(I)+BPRES
3060 205 DXX=DXX+DX
3061 200 CONTINUE
3062C CHECK FOR BEARING CAPACITY
3063 210 DO 250 I=NBX,NEL
3064 MTP=IE(I,1)
3065 QBU=9.*C(MTP)
3066 IF(PHI(MTP).LT.0.001)GO TO 270
3067 PH=PHI(MTP)
3068 TA=SIN(PH)/COS(PH)
3069 XNQ=(PH/2.)+45.*PII/180.
3070 XNQ=(1.+TA)*EXP(TA)*(SIN(XNQ)/COS(XNQ))**2.
3071 XNC=(XNQ-1.)/TA
3072 QBU=C(MTP)*XNC+((PP(I)+PP(I+1))/2.)*XNQ
3073 270 IF(P(I).GT.QBU)PRINT 280,QBU,I
3074 280 FORMAT(19HBEARING CAPACITY OF,F10.3,18H TSF EXCEEDED FOR,
3075 8H ELEMENT,I5)
3076 250 CONTINUE
3077C CALCULATION OF MOVEMENT FROM MODELS
3080 290 IF(NOPT.EQ.0)GO TO 300
3100 PRINT 305
3110 305 FORMAT(/,33HELEMENT DEPTH,FT DELTA HEAVE,FT,
3120 26H EXCESS PORE PRESSURE,TSF)
3130 300 IF(NSUCT.EQ.0)CALL MECH
3140 IF(NSUCT.GT.0)CALL SUCT
3141 DEL1=DELH1+DELH2
3143 PRINT 306,DELH1,DELH2,DEL1
3144 306 FORMAT(/,48H SOIL HEAVE NEXT TO FOUNDATION EXCLUDING SUBSOIL=,
3145 F8.5,6H FEET,/,17H SUBSOIL MOVEMENT=,31X,F8.5,6H FEET,
3146 /,20HTOTAL SOIL MOVEMENT=,28X,F8.5,6H FEET)

```

```

3147      IF(NBPRES.EQ.1)DEL2=DELAV+DELH2
3148      IF(NBPRES.EQ.1)PRINT 308,DEL2
3149 308  FORMAT(21HTOTAL SHAFT MOVEMENT=,27X,F8.5,6H FEET)
3150      NP=NP+1
3160      IF(NP.GT.NPROB)GO TO 310
3170      GO TO 80
3180 310  STOP
3190      END
3200C
3210C
3220      SUBROUTINE MECH
3230      PARAMETER NL=10,NQ=81
3240      COMMON A(NL),B(NL),G(NL),WC(NL),EO(NL),SP(NL),AK(NL),CS(NL),
3250      CC(NL),ALPHA(NL),AKO(NL),P(NQ),IE(NQ,1),N1,N2,NBX,NEL,IOPTION,
3260      NOPT,DX,DXX,DBWT,PTI,XA,XF,DELH,DELH1,DELH2
3280      DELH1=0.0
3290      CALL PSAD
3300      IF(N1.GE.N2)GO TO 50
3310      DO 10 I=N1,N2
3320          MTP=IE(I,1)
3330          PR=(P(I)+P(I+1))/2.
3340          CA=SP(MTP)/PR
3350          E=EO(MTP)+CC(MTP)*ALOG10(CA)
3360          IF(PR.LT.SP(MTP))E=EO(MTP)+CS(MTP)*ALOG10(CA)
3370          DEL=(E-EO(MTP))/(1.+EO(MTP))
3380          IF(NOPT.EQ.0)GO TO 40
3390          DELP=SP(MTP)-PR
3400          PRINT 200,I,DXX,DEL,DELP
3410 40   DELH1=DELH1+DX*DEL
3420          DXX=DXX+DX
3430 10   CONTINUE
3450 50   DELH2=0.0
3470      IF(NBX.GT.NEL)GO TO 175
3480      DXX=FLOAT(NBX)*DX-DX/2.
3490      DO 100 I=NBX,NEL
3500          MTP=IE(I,1)
3510          PR=(P(I)+P(I+1))/2.
3520          CA=SP(MTP)/PR
3530          E=EO(MTP)+CC(MTP)*ALOG10(CA)
3540          IF(PR.LE.SP(MTP))E=EO(MTP)+CS(MTP)*ALOG10(CA)
3550          DEL=(E-EO(MTP))/(1.+EO(MTP))
3560          IF(NOPT.EQ.0)GO TO 125
3570          DELP=SP(MTP)-PR
3580          PRINT 200,I,DXX,DEL,DELP
3590 125  DELH2=DELH2+DX*DEL
3600          DXX=DXX+DX
3610 100  CONTINUE
3630 200  FORMAT(I5,F10.2,F15.5,5X,F15.5)
3660 175  RETURN
3670      END
3680C
3690C

```

```

3700      SUBROUTINE SUCT
3710      PARAMETER NL=10,NQ=81
3720      COMMON A(NL),B(NL),G(NL),WC(NL),EO(NL),SP(NL),AK(NL),CS(NL),
3730      CC(NL),ALPHA(NL),AKO(NL),P(NQ),IE(NQ,1),N1,N2,NBX,NEL,IOPTION,
3740      NOPT,DX,DXX,DGWT,PII,XA,XF,DELH,DELH1,DELH2
3760      DELH1=0.0
3770      CALL PSAD
3780      IF(N1.GE.N2)GO TO 50
3790      CALL HSUCT
3800      DELH1=DELH
3810      50 DELH2=0.0
3820      IF(NBX.GT.NEL)GO TO 175
3830      DXX=FLOAT(NBX)*DX-DX/2.
3840      N1=NBX
3850      N2=NEL
3860      CALL HSUCT
3870      DELH2=DELH
3910      175 RETURN
3920      END
3930C
3940C
3950      SUBROUTINE HSUCT
3960      PARAMETER NL=10,NQ=81
3970      COMMON A(NL),B(NL),G(NL),WC(NL),EO(NL),SP(NL),AK(NL),CS(NL),
3980      CC(NL),ALPHA(NL),AKO(NL),P(NQ),IE(NQ,1),N1,N2,NBX,NEL,IOPTION,
3990      NOPT,DX,DXX,DGWT,PII,XA,XF,DELH,DELH1,DELH2
4010
4020      DELH=0.0
4030      DO 10 I=N1,N2
4040      MYP=IE(I,1)
4045      IF(AKO(MYP).LT.0.01)AKO(MYP)=AK(MYP)
4050      F=(1.+2.*AKO(MYP))/3.
4060      PR=(P(I)+P(I+1))/2.
4070      TAU=A(MYP)-B(MYP)*WC(MYP)
4080      TAU=10.**TAU
4090      UINIT=TAU-PR
4100      CT=ALPHA(MYP)*G(MYP)/(100.*B(MYP))
4110      CT=CT/(1.+EO(MYP))
4120      RTAU=TAU/PR
4130      DEL=CT*ALOG10(RTAU)*DX
4140      IF(DEL.LT.0.0.AND.DXX.GT.DGWT)DEL=DEL/ALPHA(MYP)
4150      IF(DEL.LT.0.0.AND.IOPTION.LT.2)DEL=DEL/ALPHA(MYP)
4160      IF(NOPT.EQ.0)GO TO 33
4170      PRINT 30,I,DXX,DEL,UINIT
4180      30 FORMAT(15,F10.2,F15.5,5X,F15.5)
4190      33 DELH=DELH+DEL
4200      DXX=DXX+DX
4210      10 CONTINUE
4220      RETURN
4230      END
4240C
4250C

```

```

4260      SUBROUTINE PSAD
4270      PARAMETER NL=10,NQ=81
4280      COMMON A(NL),B(NL),G(NL),WC(NL),EO(NL),SP(NL),AK(NL),CS(NL),
4290      CC(NL),ALPHA(NL),AKO(NL),P(NQ),IE(NQ,1),N1,N2,NBX,NEL,IOPTION,
4300      NOPT,DX,DXX,DGWT,PII,XA,XF,DELH,DELH1,DELH2
4320      AN1=XF/DX
4330      AN2=XA/DX
4340      N1=IFIX(AN1)+1
4350      N2=AN2
4360      DXX=XF+DX/2.
4380      N3=NBX-1
4390      IF(N2.GT.N3)N2=N3
4400      CONTINUE
4410      RETURN
4420      END
4430
4440
4450      SUBROUTINE SLAB(Q,NSUCT,BLEN,BWID,MRECT,NBPRES,WT)
4460      PARAMETER NL=10,NQ=81
4470      COMMON A(NL),B(NL),G(NL),WC(NL),EO(NL),SP(NL),AK(NL),CS(NL),
4480      CC(NL),ALPHA(NL),AKO(NL),P(NQ),IE(NQ,1),N1,N2,NBX,NEL,IOPTION,
4490      NOPT,DX,DXX,DGWT,PII,XA,XF,DELH,DELH1,DELH2
4510      CALCULATION OF SURCHARGE PRESSURE FROM STRUCTURE
4520      NNP=NEL+1
4530      ANBX=FLOAT(NBX)*DX
4540      DXX=0.0
4550      BPRE1=Q-WT
4552      BPRES=BPRE1
4560      DO 10 I=NBX,NNP
4565      IF(DXX.LT.0.01)GO TO 30
4567      MTP=IE(I-1,1)
4568      IF(NSUCT.EQ.1)ALP=ALPHA(MTP)
4569      IF(NSUCT.EQ.1.AND.DXX.GT.DGWT)ALP=1.0
4570      IF(NSUCT.EQ.1)BPRES=BPRE1*ALP*(1.+2.*AKO(MTP))/3.
4571      IF(NBPRES.EQ.3)GO TO 20
4580      IF(DXX.LT.0.01)GO TO 30
4590      BL=BLEN
4600      BW=BWID
4610      BPR=BPRES
4620      IF(MRECT.EQ.1)GO TO 40
4630      BL=BLEN/2.
4640      BW=BWID/2.
4650      40 VE2=(BL**2.+BW**2.+DXX**2.)/(DXX**2.)
4660      VE=VE2**0.5
4670      AN=BL*BW/(DXX**2.)
4680      AN2=AN**2.
4690      ENM=(2.*AN*VE/(VE2+AN2))*(VE2+1.)/VE2
4700      FNM=2.*AN*VE/(VE2-AN2)
4710      IF(MRECT.EQ.1)BPR=BPRES/4.
4720      AB=ATAN(FNM)
4730      IF(FNM.LT.0.)AB=PII+AB
4740      P(I)=P(I)+BPR*(ENM+AB)/PII

```

```

4750      GO TO 70
4760  20   DB=DXX/BWID
4770      PS=-.157-.22*DB
4780      IF(MRECT.EQ.0.AND.DB.LT.2.5)PS=-.28*DB
4790      PS=10.**PS
4800      P(I)=P(I)+BPRES*PS
4810      GO TO 70
4820  30   P(I)=P(I)+BPRES
4830  70   DXX=DXX+DX
4840  10   CONTINUE
4890      RETURN
4900      END

```

In accordance with letter from DAEN-RDC, DAEN-ASI dated 22 July 1977, Subject: Facsimile Catalog Cards for Laboratory Technical Publications, a facsimile catalog card in Library of Congress MARC format is reproduced below.

Johnson, Lawrence D.

User's guide for computer program HEAVE / by Lawrence D. Johnson (Geotechnical Laboratory, U.S. Army Engineer Waterways Experiment Station). -- Vicksburg, Miss. : The Station ; Springfield, Va. ; available from NTIS, 1982.

17, [20] p. : ill. ; 27 cm. -- (Miscellaneous paper ; GL-82-7)

Cover title.

"September 1982."

Final report.

"Prepared for Office, Chief of Engineers, U.S. Army under RDT&E Work Unit AT40/EO/004."

Bibliography: p. 17.

1. Computer programs. 2. Foundations. 3. HEAVE (Computer program). 4. Soil moisture. 5. Soils--Testing. I. United States. Army. Corps of Engineers. Office of the Chief of Engineers. II. U.S. Army Engineer

Johnson, Lawrence D.

User's guide for computer program HEAVE : ... 1982.
(Card 2)

Waterways Experiment Station. III. Title IV. Series: Miscellaneous paper (U.S. Army Engineer Waterways Experiment Station) ; GL-82-7.
TA7.W34m no.GL-82-7

END

FILMED

1-83

DTIC