

AD-A122 257 NUMERICAL SOLUTIONS USING ADJOINT VARIATIONAL 1/1

NUMERICAL SOLUTIONS USING ADJOINT VARIATIONAL
FORMULATION TO STRESS ANALYSIS (U) ARMY CONVENTIONAL RESEARCH

1/1

UNCLASSIFIED C N SHEN ET AL. SEP 82 ARLCB-TR-82028 F/G 12/1 NL

C N SHEN ET AL. SEP 82 ARLCB-TR-82028 F/G 12/1 NL

F/G 12/1 NL


NL

6

END

Fig. M10

215



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A122257

AD E490171


12

TECHNICAL REPORT ARLCB-TR-82028

NUMERICAL SOLUTIONS USING ADJOINT VARIATIONAL
FORMULATION TO STRESS WAVE PROBLEMS

C. N. Shen
J. J. Wu

September 1982



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
LARGE CALIBER WEAPON SYSTEMS LABORATORY
BENET WEAPONS LABORATORY
WATERVLIET, N. Y. 12189

AMCMS No. 611102H600011

DA Project No. 1L161102AH60

PRON No. 1A2250041A1A

DTIC
ELECTE
DEC 10 1982
S D E

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

82 11 10 008

DTIC FILE COPY

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The use of trade name(s) and/or manufacture(s) does not constitute an official indorsement or approval.

DISPOSITION

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARLCB-TR-82028	2. GOVT ACCESSION NO. AD-A122 257	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) NUMERICAL SOLUTIONS USING ADJOINT VARIATIONAL FORMULATION TO STRESS WAVE PROBLEMS		5. TYPE OF REPORT & PERIOD COVERED Final
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) C. N. Shen and J. J. Wu		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Armament Research & Development Command Benet Weapons Laboratory, DRDAR-LCB-TL Watervliet, NY 12189		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS No. 611102H600011 DA Project No. 1L161102AH60 PRON No. 1A2250041A1A
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Armament Research & Development Command Large Caliber Weapon Systems Laboratory Dover, NJ 07801		12. REPORT DATE September 1982
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 22
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Presented at 1982 Army Numerical Analysis and Computers Conference, US Army Engineers Waterways Experiment Station, Vicksburg, MS, 3-4 February 1982. Published in proceedings of the conference.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Adjoint Variational Principle Finite Elements Initial and Boundary Value Problems Assembly of Matrices Wave Equation Matrix Row Elimination Spline Function		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report deals with the numerical implementation of an involved analysis in conjunction with cubic Hermite polynomials as the approximate functions. The specific example used for numerical results is the longitudinal stress wave of a uniform bar. (CONT'D ON REVERSE)		

20. ABSTRACT (CONT'D)

First, the adjoint principle associated with this problem is stated. It is followed by the discretized counterparts in spatial and temporal dimensions. The procedures involving the assemblage of the "mass" and "stiffness" matrices in the two dimensions are described. Due to the null variations of some adjoint variables, certain rows of the matrices are eliminated. Because certain variables are known at the boundaries, the unknown variables for the next interval of time can be computed by inversion of a band matrix in terms of their present values.

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
INTEGRAL OF BILINEAR EXPRESSION	2
END CONDITIONS FOR THE ADJOINT SYSTEMS	3
FIRST VARIATION	4
DISCUSSION OF THE VARIATIONAL EQUATION	6
TRANSFORMATION OF COORDINATES	7
SPLINE FUNCTION	8
GRID SYSTEMS FOR FINITE ELEMENT	9
ASSEMBLY OF MATRICES	11
FURTHER DELETIONS AND KNOWN	13
CONCLUSIONS	13
REFERENCES	15

LIST OF ILLUSTRATIONS

1. Vectors in a Finite Element.	16
2. Grid System by Assembly of Finite Elements.	17
3. Matrix Assembly Global Form.	18
4. Row Deletion and Knowns.	19
5. Zero Variation of Adjoint Variables.	20
6. Variables, Known or Unknown.	21



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

INTRODUCTION

A well known advantage of variational solution formulation to boundary value problems is that the differentiability requirements of the approximate solutions can be relaxed. For initial value problems, however, this advantage is somewhat diminished by the complication due to the appearance of the farther end condition. This complication can be eliminated by the use of an adjoint variational principle as we have demonstrated for a simple initial value problem in a previous paper.¹ The more involved analysis for the mixed initial-boundary value problem has also been worked out.

The purpose of this report is to employ the adjoint variational principle in the form of finite element formulation for solving the stress wave problems. The hyperbolic partial differential equation governing the motion is second order both in spatial and time domains.

$$Ly(x,t) + Q(x,t) = 0 \quad (1)$$

where

$$Ly = (\alpha y_t)_t + (\beta y_x)_x \quad (2)$$

We seek explicitly the numerical transient solutions of y , y_t , y_x and y_{xt} for assigned boundary and initial conditions. The term y_x will give the stress wave in a longitudinal bar. The study is the extension of previous work on initial and boundary value problems.¹

¹Shen, C. N., "Method of Solution For Variational Principle Using Bicubic Hermite Polynomial," presented at the 27th Conference of Army Mathematicians, West Point, NY, June 1981.

INTEGRAL OF BILINEAR EXPRESSION

The integral of a bilinear expression for a two-dimensional problem having second order partial derivatives in both space and time can be written as

$$I = \int_{x_0}^{x_b} \int_{t_0}^{t_b} \Omega[y(x,t), \bar{y}(x,t)] dt dx \quad (3)$$

where $\Omega[y, \bar{y}]$ is a given bilinear expression in the form

$$\Omega[y, \bar{y}] = \alpha y_t \bar{y}_t + \lambda y_x \bar{y}_x \quad (4)$$

The quantity $\bar{y}$ is the adjoint of y and the subscripts t and x indicate the partial derivatives of the functions y and $\bar{y}$.

Two different forms of integrals and end conditions can be obtained from Eq. (4). The first form is obtained by integrating by parts on the adjoint variable.

$$I = - \int_{x_0}^{x_b} \int_{t_0}^{t_b} y \bar{L}_y dt dx + \int_{x_0}^{x_b} \alpha y_t \bar{y} \Big|_{t_0}^{t_b} dx + \int_{t_0}^{t_b} \lambda y_x \bar{y} \Big|_{x_0}^{x_b} dt \quad (5)$$

where $\bar{L}_y$ is given in Eq. (2).

In addition, we can perform integration on the original variable to give

$$I = - \int_{x_0}^{x_b} \int_{t_0}^{t_b} y \bar{L}_y dt dx + \int_{x_0}^{x_b} \alpha y_t \bar{y} \Big|_{t_0}^{t_b} dx + \int_{t_0}^{t_b} \lambda y_x \bar{y} \Big|_{x_0}^{x_b} dt \quad (6)$$

where

$$\bar{L}_y = (\alpha y_t)_t + (\lambda y_x)_x \quad (7)$$

In a previous paper¹ we show that the bilinear concomitant D has to be identically zero, i.e.,

¹Shen, C. N., "Method of Solution For Variational Principle Using Bicubic Hermite Polynomial," presented at the 27th Conference of Army Mathematicians, West Point, NY, June 1981.

$$D = \int_{x_0}^{x_b} \int_{t_0}^{t_b} \bar{y} Ly dt dx - \int_{x_0}^{x_b} \int_{t_0}^{t_b} y \bar{L} y dt dx \quad (8)$$

By equating Eqs. (5) and (6) and solving for D in Eq. (8), we are converting the double integral into two single integrals in terms of the initial and boundary conditions.

We can express the quantity D as the sum of two parts for end conditions as D_1 and D_2 . Thus one defines

$$D = D_1 + D_2 \quad (9)$$

The terms in D_1 involve the initial conditions of y and $\bar{y}$ as

$$\begin{aligned} D_1 &= \int_{x_0}^{x_b} \left\{ \bar{\alpha}_y t y \Big|_{t_0}^{t_b} - \alpha_y t y \Big|_{t_0}^{t_b} \right\} dx \\ &= \int_{x_0}^{x_b} \{ \alpha_b (y_{tb} \bar{y}_b - \bar{y}_{tb} y_b) - \alpha_0 (y_{t_0} \bar{y}_0 - \bar{y}_{t_0} y_0) \} dx \end{aligned} \quad (10)$$

The terms in D_2 involve the boundary conditions of y and $\bar{y}$ as

$$\begin{aligned} D_2 &= \int_{t_0}^{t_b} \left\{ \bar{l}_y x y \Big|_{x_0}^{x_b} - l_y x y \Big|_{x_0}^{x_b} \right\} dt \\ &= \int_{t_0}^{t_b} \{ l_b (y_{xb} \bar{y}_b - \bar{y}_{xb} y_b) - l_0 (y_{x_0} \bar{y}_0 - \bar{y}_{x_0} y_0) \} dt \end{aligned} \quad (11)$$

In order that $D \equiv 0$ in Eq. (9) it is sufficient that

$$D_1 \equiv 0 \quad (12a)$$

and

$$D_2 \equiv 0 \quad (12b)$$

END CONDITIONS FOR THE ADJOINT SYSTEMS

In order to satisfy the two requirements in Eq. (12), we separate them in two parts. Let us consider first the time domain and assume that the adjoint variables are assigned as

$$\begin{aligned}\bar{y}_b &= y_o, & \bar{y}_o &= y_b \\ \bar{y}_{tb} &= -\alpha_b^{-1} \alpha_o y_{to}, & \bar{y}_{to} &= -\alpha_o^{-1} \alpha_b y_{tb} \\ \alpha_b &\neq 0 & \alpha_o &\neq 0\end{aligned}$$

The above adjoint initial conditions satisfy the requirement that D_1 Eq. (10). Now we turn to the spatial domain and assume that the adjoint variables are

$$\begin{aligned}\bar{y}_b &= \beta y_b, & \bar{y}_o &= \beta y_o \\ \bar{y}_{xb} &= \beta y_{xb}, & \bar{y}_{xo} &= \beta y_{xo}\end{aligned}$$

The above adjoint boundary conditions satisfy the requirement that D_2 Eq. (11), with β as a constant.

By giving the appropriate values of these adjoint variables in terms of the original variables, one may find that the requirement $D \equiv 0$ can be satisfied. This leads to the result¹ previously found as

$$J[\bar{y}, y] = \int_{t_o}^{t_b} \int_{x_o}^{x_b} \bar{Q} y dt dx + \int_{t_o}^{t_b} \int_{x_o}^{x_b} \bar{y} (Q+1) dt dx = 0 \quad (12)$$

FIRST VARIATION

By taking variation on Eq. (18) we have

$$\begin{aligned}\delta J &= \delta J[\delta \bar{y}] + \delta J[\delta y] \\ &= \int_{t_o}^{t_b} \int_{x_o}^{x_b} \delta \bar{y} (L y) dt dx + \int_{t_o}^{t_b} \int_{x_o}^{x_b} \bar{y} (L \delta y) dt dx = 0\end{aligned} \quad (13)$$

¹Shen, C. N., "Method of Solution For Variational Principle Using Bicubic Hermite Polynomial," presented at the 27th Conference of Army Mathematicians, West Point, NY, June 1981.

where

$$\delta J[\delta \bar{y}] = \int_{t_0}^{t_b} \int_{x_0}^{x_b} \delta \bar{y} (Ly + Q) dt dx \quad (20)$$

and

$$\delta J[\delta y] = \int_{t_0}^{t_b} \int_{x_0}^{x_b} \delta y (\bar{L}y + \bar{Q}) dt dx \quad (21)$$

Since $D \equiv 0$ in Eq. (8) the variation δD should be zero

$$\delta D = \delta D[\delta \bar{y}] + \delta D[\delta y] = 0 \quad (22)$$

Since the variations $\delta \bar{y}$ and δy are independent, then

$$\delta D[\delta y] = \int_{t_0}^{t_b} \int_{x_0}^{x_b} y (L \delta y) dt dx - \int_{t_0}^{t_b} \int_{x_0}^{x_b} \delta y (\bar{L}y) dt dx = 0 \quad (23)$$

which is the same as the last two terms in Eq. (19) which vanish. Thus

$$\delta J = \delta J[\delta \bar{y}] + \delta J[\delta y] = 0 \quad (24)$$

Since the variations $\delta \bar{y}$ and δy are independent

$$\delta J[\delta \bar{y}] = \int_{t_0}^{t_b} \int_{x_0}^{x_b} \delta \bar{y} (Ly + Q) dt dx = 0 \quad (25)$$

where Ly is given in Eq. (2) and contains higher derivatives than the first partials in y . It is intended to include only lower order partial differentiation in y . This can be achieved by considering the variations of the bilinear expression I given by Eqs. (3) and (4) as

$$\delta I[\delta \bar{y}] = \int_{t_0}^{t_b} \int_{x_0}^{x_b} [\alpha_{yt} \delta \bar{y}_t + \lambda_{yx} \delta \bar{y}_x] dt dx \quad (26)$$

A different form of the above variation can be obtained from Eq. (5) as

$$\delta I[\delta \bar{y}] = - \int_{x_0}^{x_b} \int_{t_0}^{t_b} \delta \bar{y} Ly dt dx + \int_{x_0}^{x_b} \delta \bar{y} \alpha_{yt} \Big|_{t_0}^{t_b} dx + \int_{t_0}^{t_b} \delta \bar{y} \lambda_{yx} \Big|_{x_0}^{x_b} dt \quad (27)$$

Equating Eqs. (26) and (27), solving for the term containing integral for $\delta y_L y$ and substituting into Eq. (25) we have

$$\begin{aligned} \delta J[\delta y] = & \int_{x_0}^{x_b} \alpha y_t \delta y \Big|_{t_0}^{t_b} dx + \int_{t_0}^{t_b} \lambda y_x \delta y \Big|_{x_0}^{x_b} dt \\ & + \int_{x_0}^{x_b} \int_{t_0}^{t_b} \delta y Q dt dx - \int_{x_0}^{x_b} \int_{t_0}^{t_b} [\alpha y_t \delta y_t + \lambda y_x \delta y_x] dt dx = 0 \end{aligned} \quad (28)$$

This is the key equation which uses variational principle in solving a mixed initial and boundary value problem for a wave equation.

DISCUSSION OF THE VARIATIONAL EQUATION

Let us discuss the various terms in Eq. (28), the variational formulation of the wave equation, into three parts as follows.

(1) The initial conditions of the original variables are given and variations of the adjoints at the far end are zero. The first term in Eq. (28) contains the product of $y_t \delta y$ evaluated at the initial condition $y_{t_0} \delta y_0$ and at the final condition $y_{t_b} \delta y_b$. Since the value of y_b is known by Eqs. (13) and (16), $\delta y_b = 0$. That is, the variations of the adjoint variable at the far end are zero.

(2) The boundary conditions of the original variables and variation of the adjoints can be determined. The second term in Eq. (28) is the boundary term involving the variation δy and the variable y_x . For a longitudinal or a torsional bar the end conditions are

from Eq. (16) for the fixed end

$$y = 0 \quad \bar{y} = 0 \quad \delta y = 0 \quad (29)$$

from Eq. (17) for the free end

$$y_x = 0 \quad \bar{y}_x = 0 \quad \delta y_x = 0 \quad (30)$$

The variations in the adjoint variables shown in the last column coincide with the same end conditions in the original variables given in the first column, whether they are on the left or the right boundary.

(3) Interior Region - The last two terms in Eq. (28) give the interior region where the forcing function Q , the adjoint variations $\bar{\delta y}$, $\bar{\delta y}_t$, and $\bar{\delta y}_x$ and the variables y_t , and y_x are shown. No second order partial of y with respect to x is present. Thus the variables that are needed for the computation are y , y_t , and y_x . This requires a c' continuity in both spatial and time domain.

TRANSFORMATION OF COORDINATES

The integral signs in Eq. (28) can be converted into summation signs if discrete intervals for integration are used. We may take some scale factors to nondimensionalize the problem by giving

$$t_0 = 0 \quad , \quad t_b = 1 \quad 0 < t < 1 \quad (31)$$

$$x_0 = 0 \quad , \quad x_b = 1 \quad 0 < x < 1 \quad (32)$$

Moreover, Eq. (28) can be discretized by letting

$$\xi = Ht - i + 1 \quad 0 < \xi < 1 \quad i = 1, 2, \dots, H \quad (33)$$

$$\eta = Kx - j + 1 \quad 0 < \eta < 1 \quad j = 1, 2, \dots, K \quad (34)$$

where H and K are number of intervals for t and x respectively. Thus the partial derivatives are:

$$y_t = \frac{\partial y}{\partial t} = H \frac{\partial y}{\partial \xi} = Hy_\xi \quad (35)$$

$$y_x = \frac{\partial y}{\partial x} = \frac{\partial y}{\partial \eta} = Ky_\eta \quad (36)$$

Use of Eqs. (28), (31) through (36) then leads to

$$\begin{aligned} 0 &= \delta J[\bar{\delta y}] \\ &= \sum_{j=1}^K \frac{H}{K} \int_0^1 \alpha y_\xi(i,j) \delta y(i,j) d\eta \Big|_{t_0}^{t_b} \\ &\quad + \sum_{i=1}^H \frac{K}{H} \int_0^1 \lambda y_\eta(i,j) \delta y(i,j) d\xi \Big|_{x_0}^{x_b} \\ &\quad + \sum_{j=1}^K \sum_{i=1}^H \frac{1}{HK} \int_0^1 \int_0^1 Q \bar{\delta y}(i,j) d\xi d\eta \\ &\quad - \sum_{j=1}^K \sum_{i=1}^H \left\{ \frac{H}{K} \int_0^1 \int_0^1 \alpha y_\xi(i,j) \bar{\delta y}_\xi(i,j) d\xi d\eta + \frac{K}{H} \int_0^1 \int_0^1 \lambda y_\eta(i,j) \bar{\delta y}_\eta(i,j) d\xi d\eta \right\} \end{aligned} \quad (37)$$

SPLINE FUNCTION

We may express the variables $y(i,j)$ and $\bar{\delta y}(i,j)$ in Eq. (37) in terms of the (1x16) spline function $a^T(\xi, \eta)$ and the (16x1) node point function $Y(i,j)$ as follows.

$$y(i,j)(\xi, \eta) = a^T(\xi, \eta) Y(i,j) \quad (38)$$

where

$$a^T(\xi, \eta) = \{[a^1(\xi, \eta)]^T [a^2(\xi, \eta)]^T [a^3(\xi, \eta)]^T [a^4(\xi, \eta)]^T\} \quad (39)$$

and

$$\bar{\delta y}(i,j)(\xi, \eta) = a^T(\xi, \eta) \bar{\delta Y}(i,j) \quad (40)$$

A typical term for a product can be written as

$$\delta \bar{y}(i,j) y(i,j) = [\delta \bar{Y}(i,j)]^T a(\xi, \eta) a^T(\xi, \eta) Y(i,j) \quad (41)$$

Thus Eq. (37) becomes

$$\begin{aligned} \delta J(\delta y) = & \sum_{j=1}^K [\delta \bar{Y}(t_b, j)]^T P_{0\xi}(t_b) Y(t_b, j) \\ & - \sum_{j=1}^K [\delta \bar{Y}(t_o, j)]^T P_{0\xi}(t_o) Y(t_o, j) \\ & + \sum_{i=1}^H [\delta \bar{Y}(i, x_b)]^T P_{0\eta}(x_b) Y(i, x_b) \\ & - \sum_{i=1}^H [\delta \bar{Y}(i, x_o)]^T P_{0\eta}(x_o) Y(i, x_o) \\ & + \sum_{j=1}^K \sum_{i=1}^H [\delta \bar{Y}(i, j)]^T q(i, j) \\ & - \sum_{j=1}^K \sum_{i=1}^H [\delta \bar{Y}(i, j)]^T P(i, j) Y(i, j) = 0 \end{aligned} \quad (42)$$

where the coefficient P contains integrals involving the spline functions $a(\xi, \eta)$ and its partial derivatives as given in a previous paper.¹

GRID SYSTEMS FOR FINITE ELEMENT

We take a finite element represented by the (16×1) vector $Y(i, j)$ which has a grid of four (4×1) vectors $Y_1(i, j)$ through $Y_4(i, j)$, thus

$$Y(i, j) = \{[Y_1(i, j)]^T [Y_2(i, j)]^T [Y_3(i, j)]^T [Y_4(i, j)]^T\} \quad (43)$$

¹Shen, C. N., "Method of Solution For Variational Principle Using Bicubic Hermite Polynomial," presented at the 27th Conference of Army Mathematicians, West Point, NY, June 1981.

Each of the (4x1) vectors has four components, consisting of the function, its first partials in both directions, and its mixed partial, as shown in Figure 1.

These vectors are,

$$\begin{aligned}
 Y_1(i,j) &= \begin{bmatrix} y(\xi_1, \eta_j) \\ y_{\xi}(\xi_1, \eta_j) \\ y_{\eta}(\xi_1, \eta_j) \\ y_{\xi\eta}(\xi_1, \eta_j) \end{bmatrix} & Y_3(i,j) &= \begin{bmatrix} y(\xi_1, \eta_{j+1}) \\ y_{\xi}(\xi_1, \eta_{j+1}) \\ y_{\eta}(\xi_1, \eta_{j+1}) \\ y_{\xi\eta}(\xi_1, \eta_{j+1}) \end{bmatrix} \\
 Y_2(i,j) &= \begin{bmatrix} y(\xi_{i+1}, \eta_j) \\ y_{\xi}(\xi_{i+1}, \eta_j) \\ y_{\eta}(\xi_{i+1}, \eta_j) \\ y_{\xi\eta}(\xi_{i+1}, \eta_j) \end{bmatrix} & Y_4(i,j) &= \begin{bmatrix} y(\xi_{i+1}, \eta_{j+1}) \\ y_{\xi}(\xi_{i+1}, \eta_{j+1}) \\ y_{\eta}(\xi_{i+1}, \eta_{j+1}) \\ y_{\xi\eta}(\xi_{i+1}, \eta_{j+1}) \end{bmatrix} \quad (44)
 \end{aligned}$$

We use the vertical direction for the temporal domain. If we increase the row index from i to $i+1$, then the grid point shifts down by one step and the following holds

$$Y_1(i+1,j) = Y_2(i,j) \quad Y_3(i+1,j) = Y_4(i,j) \quad (45)$$

If we increase the column index from j to $j+1$, then the grid point shifts to the right by one step and one obtains

$$Y_1(i,j+1) = Y_3(i,j) \quad Y_2(i,j+1) = Y_4(i,j) \quad (46)$$

Figure 2 shows the relationship of the grid system by assembly of finite elements in the horizontal direction, which is in the spatial domain.

ASSEMBLY OF MATRICES

In order to solve Eq. (42) by finite element method, assembly of matrices from local form into global form is necessary. For instance, the last term of Eq. (42) is taken as $-\delta J_p(\delta y)$. Then

$$\delta J_p(\delta y) = \sum_{j=1}^K \sum_{i=1}^H [\delta \bar{y}(1,j)] T_p(1,j) y(1,j) \quad (47)$$

Since we know that the interval in time can be made as small as possible, with $H = 1$, we have

$$\begin{aligned} \delta J_p(\delta y) &= \sum_{j=1}^K [\delta \bar{y}(1,j)] T_p(1,j) y(1,j) \\ &= \sum_{j=1}^K \{ [\delta \bar{y}_1(1,j)] T [\delta \bar{y}_2(1,j)] T [\delta \bar{y}_3(1,j)] T [\delta \bar{y}_4(1,j)] T \} \begin{bmatrix} P_{11} & P_{12} & P_{13} & P_{14} \\ P_{21} & P_{22} & P_{23} & P_{24} \\ P_{31} & P_{32} & P_{33} & P_{34} \\ P_{41} & P_{42} & P_{43} & P_{44} \end{bmatrix} \begin{bmatrix} y_1(1,j) \\ y_2(1,j) \\ y_3(1,j) \\ y_4(1,j) \end{bmatrix} \end{aligned} \quad (48)$$

It is noted from Figure 2 that the variables can be indexed as

$$y_3(1,j) = y_1(1,j+1) = y_{2j+1} \quad (49)$$

$$y_4(1,j) = y_2(1,j+1) = y_{2j+2} \quad (50)$$

$$j=0,1,\dots,k$$

For $j = 0$,

$$y_1(1,1) = y_1, \quad y_2(1,1) = y_2 \quad (51)$$

For $j = k = 5$

$$y_3(1,5) = y_{11}, \quad y_4(1,5) = y_{12} \quad (52)$$

Also from Figure 2, the adjoint variations are

$$\delta \bar{Y}_3(1,j) = \delta \bar{Y}_1(1,j+1) = \delta \bar{Y}_{2j+1} \quad (53)$$

$$\delta \bar{Y}_4(1,j) = \delta \bar{Y}_2(1,j+1) = \delta \bar{Y}_{2j+1} \quad (54)$$

For $j = 0$,

$$\delta \bar{Y}_1(1,j) = \delta \bar{Y}_1, \quad \delta \bar{Y}_2(1,1) = \delta \bar{Y}_2 \quad (55)$$

For $j = k = 5$,

$$\delta \bar{Y}_3(1,5) = \delta \bar{Y}_{11}, \quad \delta \bar{Y}_4(1,5) = \delta \bar{Y}_{12} \quad (56)$$

Now the local matrices in Eq. (48) can be assembled into a global band matrix shown in Figure 3. Those elements not explicitly written are zeroes in Figure 3.

Since the adjoint variable $\bar{y}_b$ at the far end is assigned in terms of the known initial value y_0 , the variation is

$$\delta \bar{y}_b = 0 \quad (57)$$

From Figure 2 we have

$$\delta \bar{Y}_2 = \delta \bar{Y}_4 = \delta \bar{Y}_6 = \delta \bar{Y}_8 = \delta \bar{Y}_{10} = \delta \bar{Y}_{12} = \delta \bar{Y}_{\text{EVEN}} = 0 \quad (58)$$

This is equivalent to deleting the even rows of the matrix in Figure 3. The deletion is marked in Figure 4. The number of relationships is reduced to half of the original dimension.

The variables Y_{ODD} in Figure 2 are the initial values of the problem which are supposed to be given. Thus, $Y_1, Y_3, Y_5, Y_7, Y_9, Y_{11}$ are all knowns. The coefficients related to these knowns should eventually be shifted to the right side of the equation.

FURTHER DELETIONS AND KNOWN

Suppose we have a bar with the fixed end at the left. Then from Eq. (29) one obtains

$$y_0 = 0 \quad (59)$$

$$\text{and} \quad \delta \bar{y}_0 = 0 \quad (60)$$

The above equations translate to be

$$y(2,1) = 0 \quad (\text{known}) \quad (61)$$

$$\text{and} \quad \delta \bar{y}(1,1) = 0 \quad (\text{deletion}) \quad (62)$$

On the other hand we have a free end at the right. Then Eq. (30) gives

$$y_{xb} = 0 \quad (63)$$

$$\text{and} \quad \delta y_{xb} = 0 \quad (64)$$

The above equations yield

$$y_\eta(2,6) = 0 \quad (\text{known}) \quad (65)$$

$$\text{and} \quad \delta y_\eta(1,6) = 0 \quad (\text{deletion}) \quad (66)$$

Figure 5 gives the variation of adjoint variables. It shows two extra zero variations at the first row, $\delta \bar{y}(1,1)$ at the left and $\delta \bar{y}_\eta(1,6)$ at the right. We have also all zero variations on the second row. Figure 6 shows the known and unknown variables. There are two extra known variables in the second row due to boundary conditions, $y(2,1)$ at the left and $y_\eta(2,6)$ at the right. The first row gives all known initial conditions.

CONCLUSIONS

Direct computation of stress, i.e., numerical solution for first spatial derivatives of the displacement can be obtained directly. This is important if the problem has noisy components in the solution of the displacement.

Computation can be made successively, i.e., the final values of the solution at the first stage in time can be used as the initial values of the second period in time. The variations of the adjoint variables at the far end in time for an initial-boundary value problem are zeroes. Deletion of many rows in the assembled matrix is possible. The assembled matrix for computing is reduced to less than half size in linear dimension, from $(2n \times 2n)$ to $(n \times n)$. Hence, a bigger number of intervals in the spatial dimension can be handled. The reduced matrix is a band matrix which makes the storage requirement for computation much easier.

REFERENCES

1. Shen, C. N., "Method of Solution For Variational Principle Using Bicubic Hermite Polynomial," presented at the 27th Conference of Army Mathematicians, West Point, NY, June 1981.

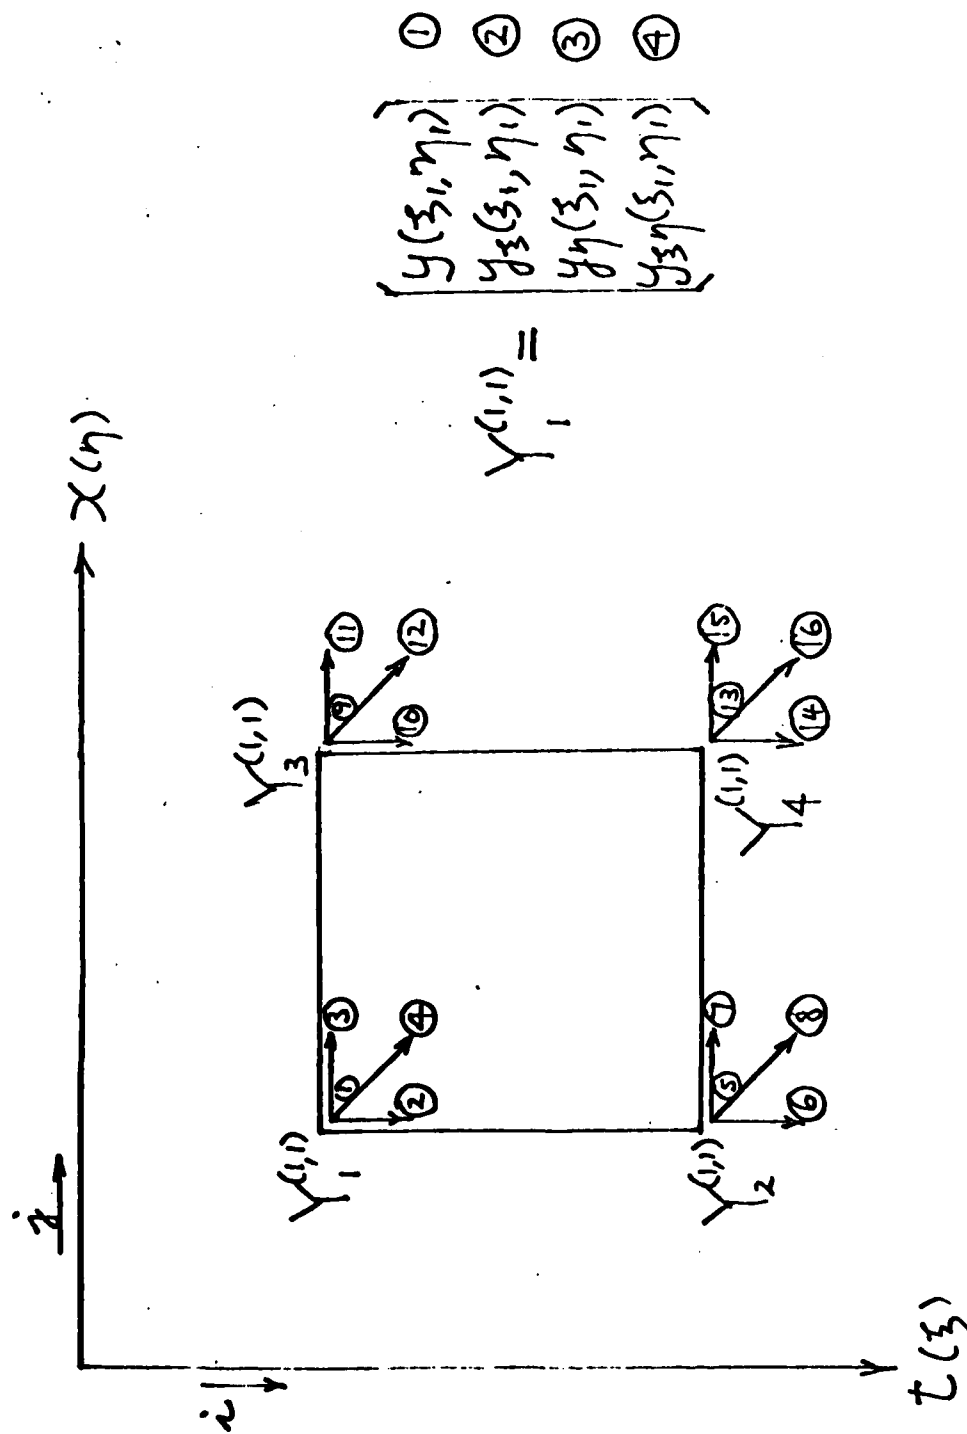


Figure 1. Vectors in a Finite Element.

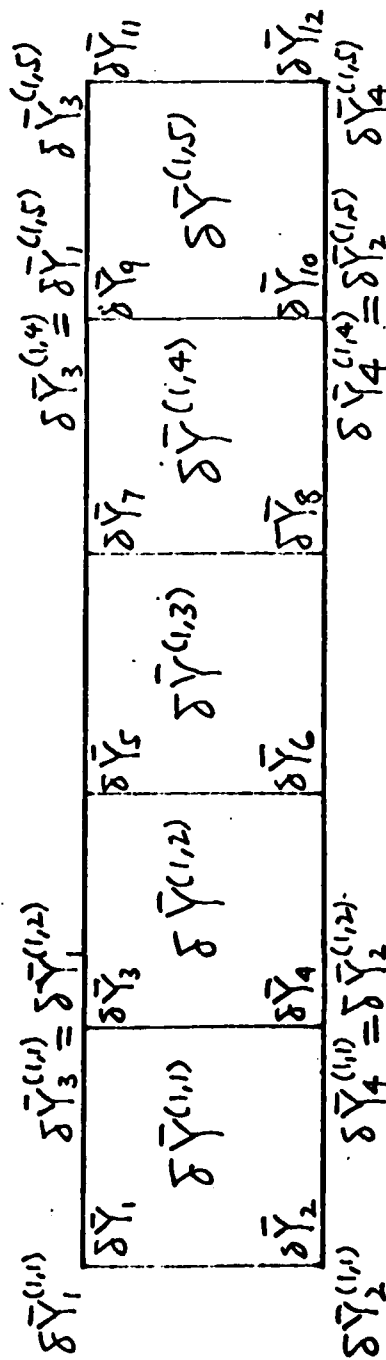
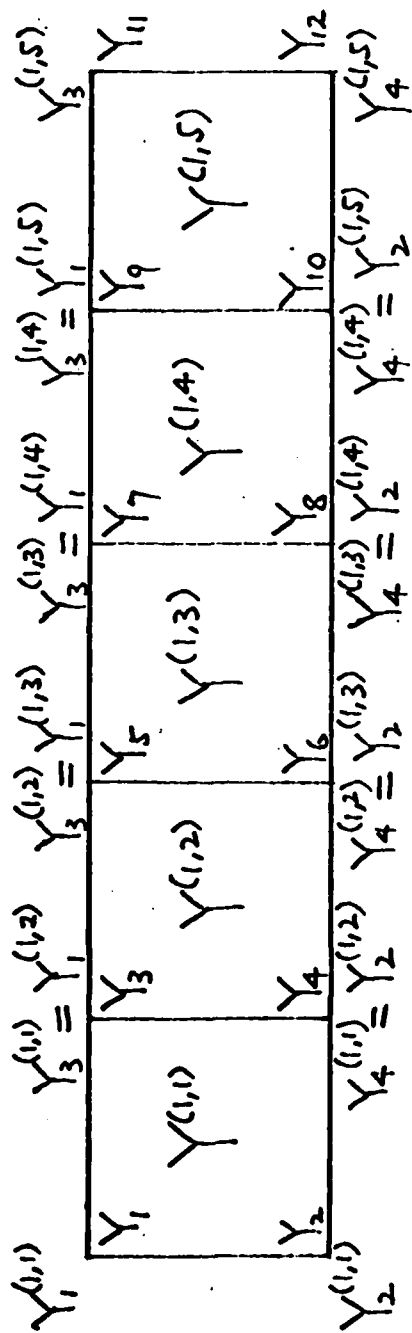


Figure 2. Grid System by Assembly of Finite Elements.

$$\begin{bmatrix} \delta \bar{Y}_1 \\ \delta \bar{Y}_2 \\ \delta \bar{Y}_3 \\ \delta \bar{Y}_4 \\ \delta \bar{Y}_5 \\ \delta \bar{Y}_6 \\ \delta \bar{Y}_7 \\ \delta \bar{Y}_8 \\ \delta \bar{Y}_9 \\ \delta \bar{Y}_{10} \\ \delta \bar{Y}_{11} \\ \delta \bar{Y}_{12} \end{bmatrix}^T \begin{bmatrix} P_{11} & P_{12} & P_{13} & P_{14} \\ P_{21} & P_{22} & P_{23} & P_{24} \\ P_{31} & P_{32} & P_{33} & P_{34} \\ P_{41} & P_{42} & P_{43} & P_{44} \\ P_{51} & P_{52} & P_{53} & P_{54} \\ P_{61} & P_{62} & P_{63} & P_{64} \\ P_{71} & P_{72} & P_{73} & P_{74} \\ P_{81} & P_{82} & P_{83} & P_{84} \\ P_{91} & P_{92} & P_{93} & P_{94} \\ P_{101} & P_{102} & P_{103} & P_{104} \\ P_{111} & P_{112} & P_{113} & P_{114} \\ P_{121} & P_{122} & P_{123} & P_{124} \end{bmatrix} \begin{bmatrix} Y_1 \\ Y_2 \\ Y_3 \\ Y_4 \\ Y_5 \\ Y_6 \\ Y_7 \\ Y_8 \\ Y_9 \\ Y_{10} \\ Y_{11} \\ Y_{12} \end{bmatrix}$$

$$\delta \bar{Y}_{\text{EVEN}} = 0$$

$$P_{ca} = P_{11} + P_{33}$$

$$P_{ba} = P_{21} + P_{43}$$

$$P_{ab} = P_{12} + P_{34}$$

$$P_{bb} = P_{22} + P_{44}$$

$$Y_{\text{ODD}} \rightarrow K_{\text{NOV}}$$

Figure 3. Matrix Assembly Global Form.











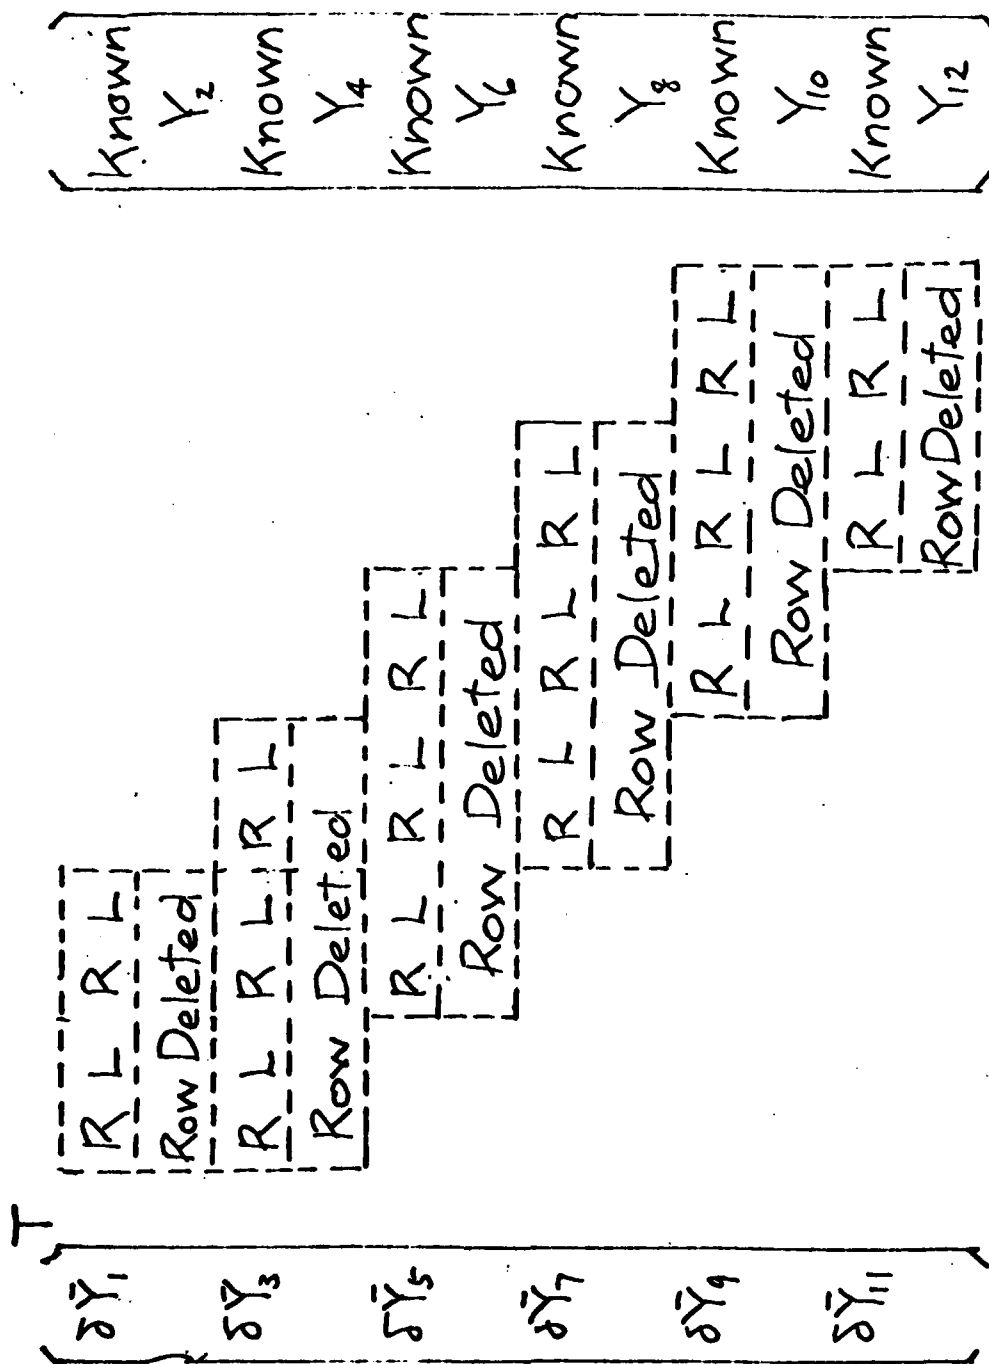


Figure 4. Row Deletion and Knowns.

FIXED END

FREE END

FIRST ROW: 2 NULL VARIATIONS $\rightarrow$ 2 DELETED EQUATIONS.
 22 ARBITRARY VARIATIONS $\rightarrow$ 22 EQUATIONS

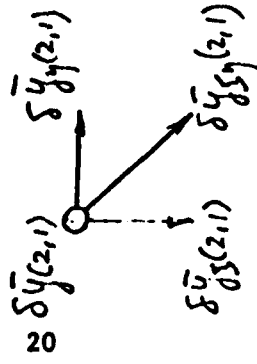

SECOND ROW: ALL FAR END VARIATIONS IN TIME ARE ZEROS.
 24 DELETED EQUATIONS.

O ZERO $\rightarrow$ ZERO

X NOT ZERO











$\rightarrow$ NOT ZERO

Figure 5. Zero Variation of Adjoint Variables.

FIXED
END

FREE
END

FIRST ROW: ALL I.C. ARE KNOWNS. 24 DELETED UNKNOWNNS



SECOND ROW: B.C. 2 DELETED UNKNOWNNS.

Total 22 UNKNOWNNS

O KNOWN

→ KNOWN

X UNKNOWN

---→ UNKNOWN

Figure 6. Variables, Known or Unknown.

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>
CHIEF, DEVELOPMENT ENGINEERING BRANCH	1
ATTN: DRDAR-LCB-DP	1
-DR	1
-DS (SYSTEMS)	1
-DS (ICAS GROUP)	1
-DC	1
CHIEF, ENGINEERING SUPPORT BRANCH	1
ATTN: DRDAR-LCB-SE	1
CHIEF, RESEARCH BRANCH	2
ATTN: DRDAR-LCB-R (ELLEN FOGARTY)	1
-RA	1
-RM	1
-RP	1
-RT	1
TECHNICAL LIBRARY	5
ATTN: DRDAR-LCB-TL	
TECHNICAL PUBLICATIONS & EDITING UNIT	2
ATTN: DRDAR-LCB-TL	
DIRECTOR, OPERATIONS DIRECTORATE	1
DIRECTOR, PROCUREMENT DIRECTORATE	1
DIRECTOR, PRODUCT ASSURANCE DIRECTORATE	1

NOTE: PLEASE NOTIFY DIRECTOR, BENET WEAPONS LABORATORY, ATTN: DRDAR-LCB-TL,
OF ANY REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	NO. OF COPIES		NO. OF COPIES
ASST SEC OF THE ARMY RESEARCH & DEVELOPMENT ATTN: DEP FOR SCI & TECH THE PENTAGON WASHINGTON, D.C. 20315	1	COMMANDER ROCK ISLAND ARSENAL ATTN: SARRI-ENM (MAT SCI DIV) ROCK ISLAND, IL 61299	1
COMMANDER DEFENSE TECHNICAL INFO CENTER ATTN: DTIC-DDA CAMERON STATION ALEXANDRIA, VA 22314	12	DIRECTOR US ARMY INDUSTRIAL BASE ENG ACT ATTN: DRXIB-M ROCK ISLAND, IL 61299	1
COMMANDER US ARMY MAT DEV & READ COMD ATTN: DRCDE-SG 5001 EISENHOWER AVE ALEXANDRIA, VA 22333	1	COMMANDER US ARMY TANK-AUTMV R&D COMD ATTN: TECH LIB - DRSTA-TSL WARREN, MICHIGAN 48090	1
COMMANDER US ARMY ARRADCOM ATTN: DRDAR-LC	1	COMMANDER US ARMY TANK-AUTMV COMD ATTN: DRSTA-RC WARREN, MICHIGAN 48090	1
DRDAR-LCA (PLASTICS TECH EVAL CEN)	1	COMMANDER US MILITARY ACADEMY ATTN: CHMN, MECH ENGR DEPT WEST POINT, NY 10996	1
DRDAR-LCE	1	US ARMY MISSILE COMD REDSTONE SCIENTIFIC INFO CEN ATTN: DOCUMENTS SECT, BLDG 4484	2
DRDAR-LCM (BLDG 321)	1	REDSTONE ARSENAL, AL 35898	
DRDAR-LCS	1		
DRDAR-LCU	1		
DRDAR-LCW	1		
DRDAR-TSS (STINFO)	2		
DOVER, NJ 07801		COMMANDER US ARMY FGN SCIENCE & TECH CEN ATTN: DRXST-SD 220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	1
DIRECTOR US ARMY BALLISTIC RESEARCH LABORATORY ATTN: DRDAR-TSB-S (STINFO) ABERDEEN PROVING GROUND, MD 21005	1	COMMANDER US ARMY MATERIALS & MECHANICS RESEARCH CENTER ATTN: TECH LIB - DRXMR-PL WATERTOWN, MASS 02172	2

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY, DRDAR-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY REQUIRED CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT.)

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
COMMANDER US ARMY RESEARCH OFFICE ATTN: CHIEF, IPO P.O. BOX 12211 RESEARCH TRIANGLE PARK, NC 27709	1	DIRECTOR US NAVAL RESEARCH LAB ATTN: DIR, MECH DIV CODE 26-27 (DOC LIB) WASHINGTON, D.C. 20375	1 1
COMMANDER US ARMY HARRY DIAMOND LAB ATTN: TECH LIB 2800 POWDER MILL ROAD ADELPHIA, MD 20783	1	METALS & CERAMICS INFO CEN BATTELLE COLUMBUS LAB 505 KING AVE COLUMBUS, OHIO 43201	1
COMMANDER NAVAL SURFACE WEAPONS CEN ATTN: TECHNICAL LIBRARY CODE X212 DAHLGREN, VA 22448	1	MATERIEL SYSTEMS ANALYSIS ACTV ATTN: DRSXY-MP ABERDEEN PROVING GROUND MARYLAND 21005	1

NOTE: PLEASE NOTIFY COMMANDER, ARRADCOM, ATTN: BENET WEAPONS LABORATORY,
DRDAR-LCB-TL, WATERVLIET ARSENAL, WATERVLIET, N.Y. 12189, OF ANY
REQUIRED CHANGES.

END

FILMED

2-83

DTIC