

AD-A124 597


SYNTHESIS OF A COLLISION TOLERANT FIXED NAVIGATION
MARKER SYSTEM(U) NAVAL POSTGRADUATE SCHOOL MONTEREY CA
M R MILLER OCT 82

1/2

UNCLASSIFIED

F/G 13/18 NL

NL



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

2

NAVAL POSTGRADUATE SCHOOL

Monterey, California



DTIC
ELECTE
S FEB 18 1983
A

THESIS

SYNTHESIS OF A COLLISION TOLERANT
FIXED NAVIGATION MARKER SYSTEM

by

Max R. Miller Jr.

October 1982

Thesis Advisor:

J. F. Sladky

Approved for public release; distribution unlimited.

DTIC FILE COPY

ADA 124597

03 02 11 032

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO. A124 597	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Synthesis of a Collision Tolerant Fixed Navigation Marker System		5. TYPE OF REPORT & PERIOD COVERED Master's Thesis; October 1982
7. AUTHOR(s) Max R. Miller Jr.		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE October 1982
		13. NUMBER OF PAGES 171
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Flexure Element Rubber Flexure Element Beam Element Nonisotropic Beam Bending		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The collision tolerant navigational marker system study was undertaken to determine the feasibility of using rubber as a flexure element when mounted in a fixed navigational structure for shallow water applications (20 ft. depth or less). Quantitative evaluations will be made of the system's technical feasibility, performance under environmental loadings, availability, associated installation systems, and cost.		

DD FORM 1473
1 JAN 73EDITION OF 1 NOV 68 IS OBSOLETE
S/N 0102-014-6601

UNCLASSIFIED


SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE/When Data Entered

#20 - ABSTRACT - (CONTINUED)

It is the intent of this work to develop a data base, investigate the use of mathematical/computer models, develop a configuration matrix of installation modes.

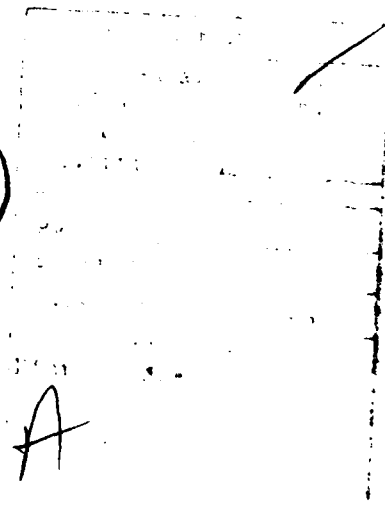

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE/When Data Entered

Approved for public release; distribution unlimited.

Synthesis of a Collision Tolerant
Fixed Navigation Marker System

by

Max R. Miller Jr.
Lieutenant Commander, United States Coast Guard
B.S., California Maritime Academy, 1971

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN MECHANICAL ENGINEERING

from the
NAVAL POSTGRADUATE SCHOOL
October 1982

Author:

Max R. Miller Jr.

Approved by:

J. Stachy Thesis Advisor

Gilles Cantor Second Reader

J. Marts
Chairman, Department of Mechanical Engineering

William M. Colles
Dean of Science and Engineering

ABSTRACT

The collision tolerant navigational marker system study was undertaken to determine the feasibility of using rubber as a flexure element when mounted in a fixed navigational structure for shallow water applications (20 ft. depth or less). Quantitative evaluations will be made of the system's technical feasibility, performance under environmental loadings, availability, associated installation systems, and cost. It is the intent of this work to develop a data base, investigate the use of mathematical/computer models, develop a configuration matrix of installation modes.



TABLE OF CONTENTS

I.	INTRODUCTION -----	10
II.	PROBLEM STATEMENT -----	14
III.	MARKER LOADING CONDITIONS -----	17
	A. ENVIRONMENTAL LOADS -----	17
	1. Current Loads -----	17
	2. Wind Loads -----	22
	3. Ice Conditions -----	23
	4. System Frequencies -----	23
	B. INSTALLATION LOADS -----	25
	1. Handling Loads -----	25
	2. Driving Loads -----	25
	C. COLLISION LOADS -----	25
IV.	CONCEPT FORMULATION -----	26
V.	MODEL DEVELOPMENT -----	34
	A. ANALYTICAL APPROACH -----	34
	1. GIFTS -----	40
	2. ADINA -----	40
	B. EXPERIMENTAL CORRELATIONS -----	40
VI.	DESIGN SYNTHESIS -----	58
	A. ENVIRONMENTAL LOADS -----	59
	1. Current Loads -----	59
	2. Wind Loads -----	59
	B. DESIGN IMPLEMENTATION -----	60
	C. COST DIFFERENTIAL -----	63

VII. CONCLUSIONS -----	65
A. AREAS FOR FURTHER STUDY -----	65
APPENDIX A: COMMERCIAL LITERATURE -----	67
APPENDIX B: CURRENT LOADS -----	122
APPENDIX C: WIND LOADS -----	123
APPENDIX D: BEAM EQUATIONS -----	124
APPENDIX E: GIFTS -----	126
APPENDIX F: ADINA -----	137
APPENDIX G: TABULATED DATA -----	150
APPENDIX H: SAMPLE CALCULATION -----	168
LIST OF REFERENCES -----	170
INITIAL DISTRIBUTION LIST -----	171

LIST OF FIGURES

1. Distribution of High Density Marker Locations ----	11
2. System Performance Parameters -----	16
3. Marker Loading Conditions -----	18
4. Driving Depths for Various Pile Types -----	19
5. Typical Loading Distribution -----	20
6. System Behavior Characteristics -----	27
7. Spring Flexure Element -----	29
8. Snap Through Flexure Element -----	30
9. Tethered Floating Platform -----	31
10. Rubber Flexure Element -----	32
11. Free Body Diagram -----	35
12. a) Axially Loaded Thin Shell -----	39
b) Model Loading -----	39
13. Schematic of Test Apparatus -----	41
14. Element Test Section -----	42
15. a thru f Test Section Bending Sequence -----	44
16. Test Section Dimensions -----	47
17. ADINA Output -----	51
18. Experimental Test Data -----	52
19. Lockup Characteristic -----	53
20. Comparison of Experimental Data and ADINA Output -	55
21. Collapsed Test Section -----	56
22. Buckling and Bending Mode -----	57
23. Installation Schematic -----	62
24. Cost Comparison -----	64

NOMENCLATURE

A_p	Piling Projected Area (immersed)
A_m	Area of Navigation marker
C	Distance from the Neutral Axis to Outermost fiber of beam
C_{Dp}	Drag Coefficient (Piling)
C_{Dm}	Drag Coefficient (marker)
D	Outside Diameter
d	Inside Diameter
D_p	Diameter of Piling
E	Young's Modulus
F_{Dc}	Force on Piling Due to Current
F_{Dm}	Wind Force on Navigation Marker
h	Thickness
I	Moment of Inertia
J	Mass Moment of Inertia
K	Stiffness
l	Length
L	Length of Test Section
L_p	Length of Piling (immersed)
M	Mass
M_c	Moment Due to Current
M_T	Total Moment Due to Environment
M_{wm}	Moment Due to Wind Loads on Marker
M_{wp}	Moment Due to Wind Loads on above Water Piling

R Mean Radius
 Re Reynold's Number
 S Distance from Applied Wind Load to Flexure Element
 U_w Wind Speed
 U_∞ Water Free Stream Velocity
 ν Kinematic Viscosity
 ρ_1 Water Density
 α Angular Deflection from Vertical Axis

I. INTRODUCTION

Since the early 1700's when the Little Brewster Island Lighthouse was erected to light the entrance of Boston Harbor, the United States Coast Guard has expanded the short range aid to navigation system to include Alaska, Hawaii, east and west coasts of the mainland United States and major inland rivers and lakes.

The U.S. Coast Guard is wholly responsible for 60% of the approximately 80,000 short range aids to navigation. This includes procurement of material, fabrication, installation, maintenance, repair, and replacement. This system of short range aids consists of buoy and fixed structures which offer a combination of sound, light, and/or electronic beacons.

The dependability of these markers is critical as they identify hazards to marine traffic. The markers define navigable channels in rivers and are extensively used by pilots in guiding barge traffic. Not only must these aids be there but their position must be known and correspond to the navigation charts. Figure 1 illustrates the approximate distribution and densities of the navigation aids throughout the United States.

In order to meet this mission requirement the U.S. Coast Guard maintains a fleet of highly specialized vessels varying in length from 33 feet to 180 feet. These specialized vessels

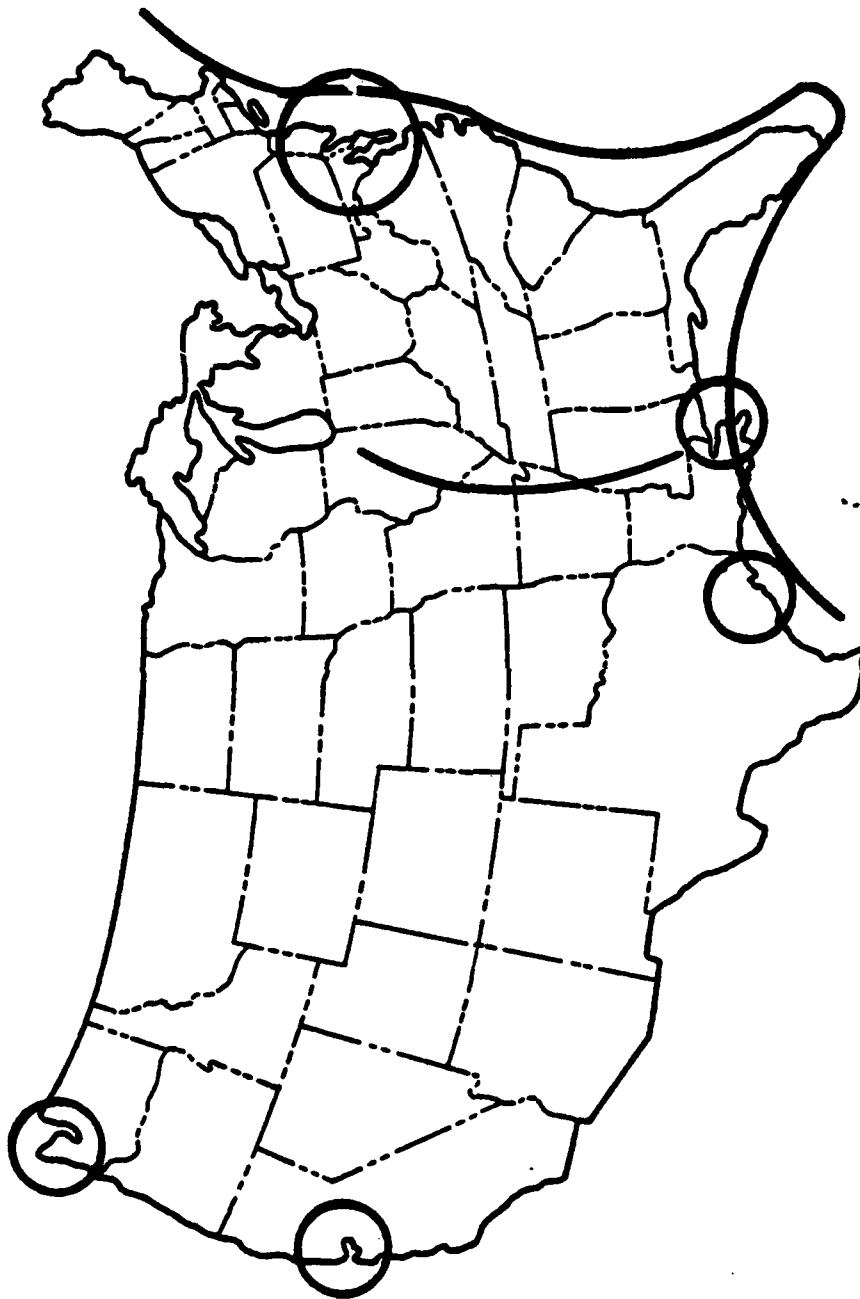


Figure 1. Distribution of High Density Marker Locations

carry crews whose technical background and capability must span many different disciplines including civil, mechanical, and electrical engineering. Equipment as diverse as 4500 lbf. diesel powered pile drivers and delicate alignment instruments are utilized.

The navigational aids are designed to withstand the environmental loading due to wind, current, waves, and ice where applicable. In addition to the above loads many markers, especially in narrow channels, are often exposed to direct collision impact loads by marine traffic such as ships, and barge strings. According to the 8th U.S. Coast Guard District, Civil Engineering Branch, located in New Orleans, Louisiana, approximately 300 fixed structure aids are "destroyed" each year. Another 400 fixed aids are damaged. In that district alone the direct replacement cost exceeds \$1,000,000.00 annually. This includes vessel time, man hours, materials, and navigation packages. The installation of a navigational marker is particularly labor intensive. In each operation the precise marker location must be identified, the damaged structure located and pulled, and a new fixed structure driven. In addition the possibility of law suits and litigation due to marker failure can represent significant additional cost to the government.

It is thus obvious that a navigational structure that will maintain its position and orientation under environmental loads yet absorb or deflect under vessel collision impact

would significantly alleviate the effort and cost required to maintain the system.

It is the purpose of this study to explore the feasibility of a "Collision Tolerant" (CoTo) fixed navigation marker that will significantly reduce costs and improve the system's reliability. In order to accomplish this the project is structured in four phases. The first will focus on the environmental conditions and the resultant environmental loads on a typical fixed structure. The second phase will address concept formulation. The third element will focus on analytical modeling and experimental validation of a flexure joint. The last phase will be devoted to the system integration.

II. PROBLEM STATEMENT

During its life cycle a fixed navigational aid sees a combination of two categories of loads; environmental loads and collision loads. Failures due to environmental conditions alone are very rare. Destruction as a result of collision impact loading is the primary cause of failure in fixed aids. Collision may completely destroy the marker including its supporting structure, or it may disable its signaling capability. In the former case not only is the marker destroyed but also its precise location is lost. It may be several days before a report is received by the U.S. Coast Guard identifying the damaged aid. Once it has been identified, a buoy tender is dispatched to first find the original position of the navigational aid, remove damaged aid if necessary, and drive the necessary piling to support a new navigational aid package.

Approximate costs of replacement vary depending on location and size of the navigational aid. Also factoring into the total cost is the size of vessel required to effect repairs. The exact replacement costs are difficult to estimate. For a simple driven pile structure the costs vary between \$500.00 and \$2,500.00 for wood pile and a light steel structure respectively. Vessel cost ranges over a wide spectrum but for convenience \$400.00/hour is assumed. A typical installation, where the location of the marker must be determined and

surveyed, may require 8 to 10 hours. Thus the cost of complete replacement may be as high as ten thousand dollars.

It is thus obvious that a navigation marker which has the capability to survive an encounter with a vessel will significantly affect the total cost of the system. Figure 2 represents the performance constraints and operating conditions of a fixed navigation marker.

A. Environment	East & Gulf Coast
Maximum Water Depth	20 Feet
Minimum Water Depth	5 Feet
Wave Action	4-5 Feet
Maximum Wind Speed	75 Miles/Hour
Ice Conditions	N/A
Bottom Conditions-Slope	10-15 Degrees
-Consistency	Soft-Clay
Current	1-3 Knots
B. Performance Tolerance	
Small Deflection (Environmental Load)	No Damage
Small Deflection (Impact Loading)	No Support Damage
Full Run-Over Capability	Nav. Aid Damage
Allowable Variation In Recovery	15 Degrees
C. Installation	
Driving Loads	4500 lbf
Special Handling Requirements	
-Maximum Weight	18000 lbs
-Maximum Length	60 Feet (wood)
Lifecycle 10-20 Years	40 Feet (Steel)
D. Materials	Wood
	Steel
	Concrete
E. Maximum Cost	\$10,000.00

Figure 2. System Performance Parameters

III. MARKER LOADING CONDITIONS

The type of loading conditions are depicted in Figure 3. There are 3 categories: environmental, installation, and collision. These loading conditions will be largely determined by the geographic location of the marker. In addition, bottom topography and soil conditions will be a factor in the type of marker system structure loads. Bottom terrain can vary between coral, gravel and/or dense sand, loose sand and/or clay, and fibrous silt. Slope conditions generally encountered range from flat to 15 degrees.

The relationship between current conditions, type of bottom, piling diameters, and driven depth has been developed through experience and empirical correlation. A typical driven piling performance chart is presented in Figure 4 taken from Reference 1.

A. ENVIRONMENTAL LOADS

Environmental loads can be grouped into four categories: current loads on the piling, wind loads on the superstructure, loads due to ice conditions, and loading due to vortex shedding by the immersed piling. Figure 5 presents a typical marker loading condition.

1. Current Loads

In determining the current loads on a vertical piling a number of assumptions are made. a) The current is assumed uniform and constant with depth. In reality there is a

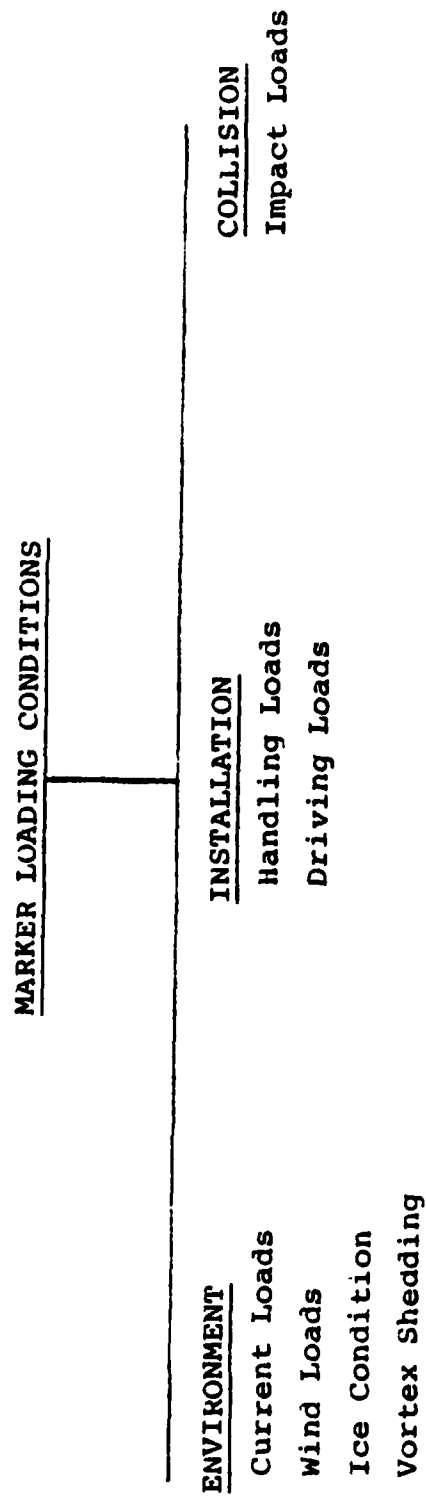


Figure 3. Marker Loading Conditions

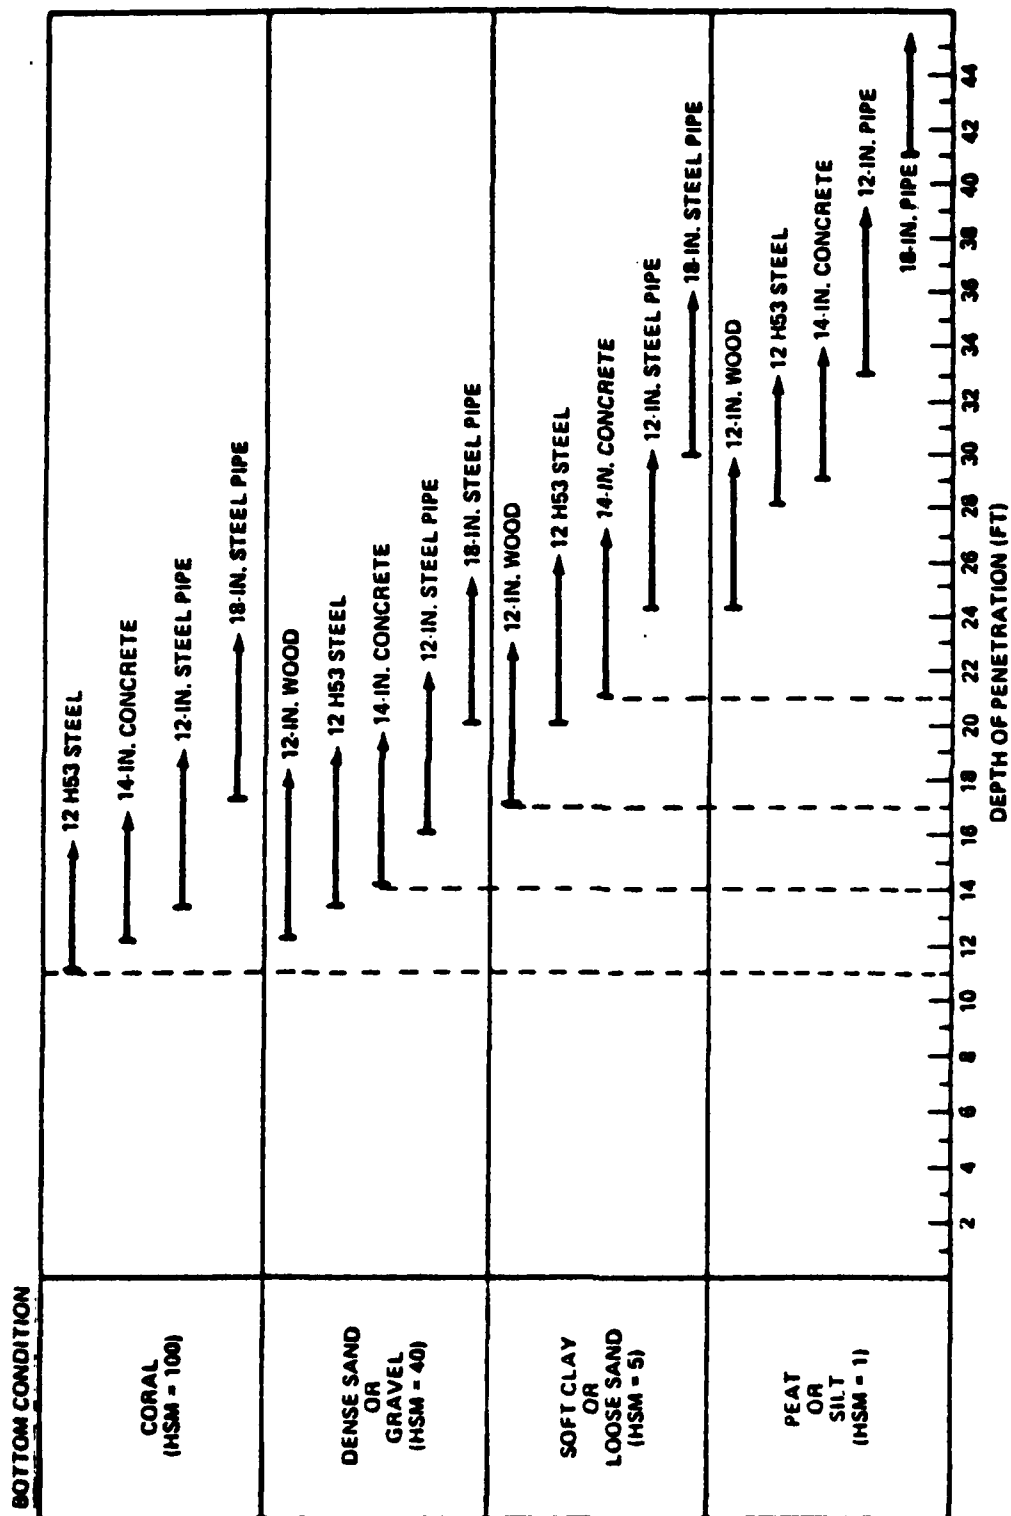


Figure 4. Driving Depths for Various Pile Types [Ref. 1 pp.4-8]

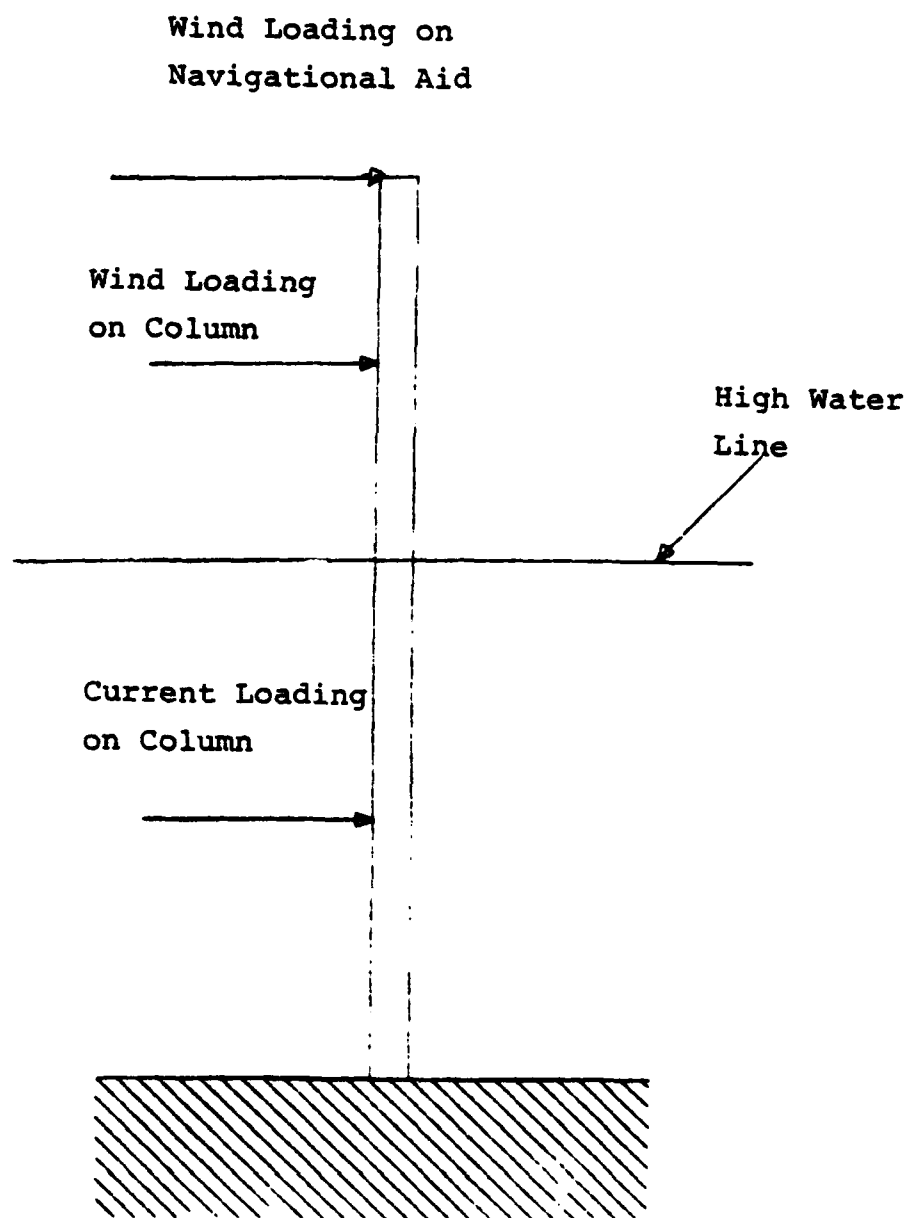


Figure 5. Typical Loading Distribution

certain velocity stratification, however, this variation is difficult to determine. The above assumption is considered reasonable as it is on the conservative side. b) In the case of an incline piling the current load will be determined on the basis of a vertically projected length of the piling. This is again a conservative approach often followed in ocean engineering practice.

The drag on a circular cylinder transverse to a fluid stream is given by Equation 1.

$$F_{DC} = \frac{1}{2} \rho U_{\infty}^2 A_p C_{Dp} \quad (1)$$

where C_D is the drag coefficient for the appropriate Reynolds number, A is the cylinder's projected area, U_{∞} is the current velocity, ρ is the density of the fluid. The moment generated at the bottom of the piling due to the current load is given by Equation 2.

$$M_C = \frac{L}{2} F_{DC} = \frac{1}{4} \rho D_p L_p^2 U_{\infty}^2 C_D \quad (2)$$

For the case where the piling is inclined α degrees from the vertical then the second assumption above is applied. In this case the piling length in Equation 2 becomes $L_{\alpha} = L_p \cos \alpha$. Examination of Equation 2 reveals that the piling moment due to current forces is linearly proportional to the pile diameter D_p and varies as the square of the immersed length L_p .

2. Wind Loads

The wind loads are primarily evident on the superstructure or the navigation marker proper. In addition, air loads are also developed on the above-water piling. In the majority of cases the navigational signal marker is a flat plate approximately 9 square feet in projected area. For this geometry the drag is given by Equation 3.

$$F_{DM} = \frac{1}{2} \rho U_w^2 A_M C_{DM} \quad (3)$$

The moment thus becomes

$$M_{WM} = S F_{DM} \quad (4)$$

The wind loads on the above-water portion of the piling itself are given in a similar fashion to Equation 1, as:

$$F_{Dw} = \frac{1}{2} \rho U_w^2 A_p D_{Cp} \quad (5)$$

The moment thus becomes

$$M_{wp} = \left(L_p + \frac{L_p - S}{2} \right) F_{Dw} \quad (6)$$

As the system departs from a vertical orientation both of these wind loads will tend to decrease.

3. Ice Conditions

Ice conditions will certainly impact the design of fixed navigation structures. The consideration is formulated in two parts; floating ice and accumulated top side ice. In the former case there can be two possible situations. The ice can exist as a frozen drifting sheet, or ice chunks, floating with the current. A drifting ice sheet moving on a frozen-over body of water will, if of sufficient thickness, destroy the fixed piling structure or push it over. Ice sheets floating with the speed of the current will introduce impact loads.

Top side ice accumulation on the navigation marker itself is difficult to quantify. Suffice it to say that weight correction factors can be applied. For the purpose of this study ice effects are not considered. First there is little marine traffic in frozen-over conditions and hence little use for the correctly displayed markers. Second ice impact loads are in effect analogous to collision loads from marine traffic. Thus a system that can handle traffic impacts can survive collisions with moving ice flows.

4. System Frequencies

In order to insure that the system's natural frequency f_n does not correspond to the frequency with which vortices are shed, the vortex shedding frequency n is related by the Strouhal number, Equation 7.

$$\frac{n D_p}{U_\infty} = S \quad (\text{Strouhal number}) \quad (7)$$

Ideally, the natural frequency should have the following relationship.

$$f_n \geq 1.5 n \quad (8)$$

If the structure is modeled as a rigid body attached to a torsion spring, the equation for the natural frequency is given by Equation 9.

$$f_n = \frac{W_n}{2\pi} \quad (9)$$

where

$$W_m = \left(\frac{K}{J}\right)^{1/2}$$

and

$$K = \frac{EI}{l}$$

$$J = Mr^2$$

For the purpose of this design a worst case loading situation will be assumed. Thus the particular structural configuration must maintain its vertical orientation within specified limits for the case where the moments due to current and wind loads are in the same direction. It is realized that

this concurrence of applied loads will exist only in a few instances.

B. INSTALLATION LOADS

Installation loads fall into two separate categories: handling loads and driving loads.

1. Handling Loads

Handling loads are the forces introduced during ship loading and unloading of the system and in positioning the marker for driving. While this aspect may not be of great significance in the case of a single piece piling it will need to be considered when the system includes possible flexure elements.

2. Driving Loads

In the conventional single piling system driving loads are not a problem. Any proposed system must have the capability to handle the driving hammer's force which can approach 4500 lbf.

C. COLLISION LOADS

Impact loads as a result of collision between marine vehicles and/or ice conditions and those encountered in pile driving can either heel over the structure or completely break it off. It is difficult to quantify the range of impact loads generated by these collisions.

IV. CONCEPT FORMULATION

In order that a fixed navigation marker "survive" under the loading conditions described it must have certain attributes. These are:

a) Under environmental loads of current and winds the marker must maintain a vertical orientation within a certain angular envelope. Under these loads the system must be "stiff".

b) On impact by a barge the piling must become very "soft" and deflect out of the path of the vehicle. The deflection may continue even to the point that the marker is "run over" by the traffic.

c) Once the impact loads are removed the marker must automatically redeploy into its vertical orientation envelope. The above requirements are described with the aid of Figure 6. Depicted are the desirable reaction moments of the system and the loading moments due to environmental forces and impact versus the deflection α . Up to a maximum worst case moment due to environmental loads the piling must maintain a vertical orientation within $\pm 15^\circ$. If a moment greater than the design moment is applied, such as that resulting from impact, the piling must deflect, i.e., the angular excursion becomes very large. This deflection allows the piling to clear the impacting object.

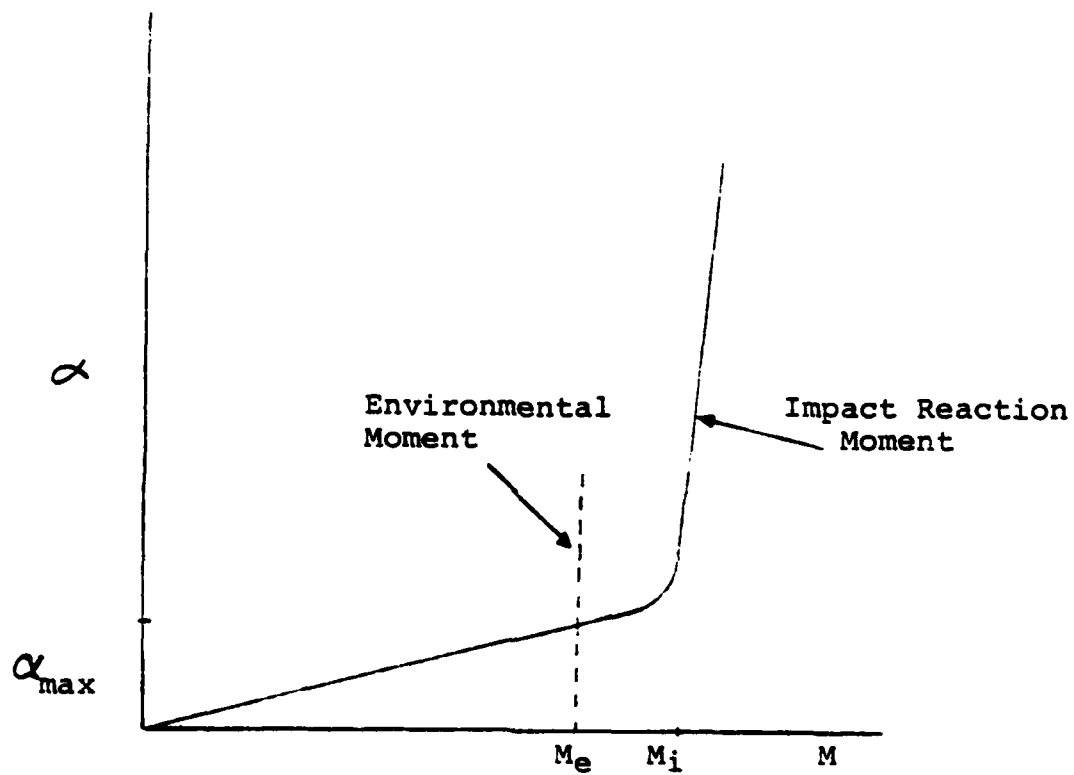


Figure 6. System Behavior Characteristics

Once the traffic has overrun and cleared the area the restoring moment must exceed the moment due to environmental forces present in the deflected configuration. Otherwise the system will not regain its original vertical deployment. It is thus apparent that a type of "snap through" behavior is required of this piling. This in turn leads into a search for a flexure mechanism that will have the desired characteristics.

A range of concepts was examined. A selected set of arrangements is illustrated in Figures 7 through 10. Each has its advantages and disadvantages. Different types of flexure elements include torsional springs, mechanical snap-through mechanism (similar to the common wall mounted light switch), tethered floating platforms, and rubber elements. The United States Coast Guard Office of Ocean Engineering, Washington, D.C., for reasons of low cost and high off-the-shelf availability decided that rubber in a particular configuration had significant promise. The most common configuration of these rubber elements is a hollow circular cross section of various outside to inside diameter ratio. The rubber is either extruded with no attached flanges or molded with integral metal flanges. Appendix A is a sample of commercial literature available on this material.

These units, generally referred to as cell marine fenders, are designed as annular columns which fail in the buckling mode. For the proposed application in the case of the fixed navigational system the cylindrical rubber element will

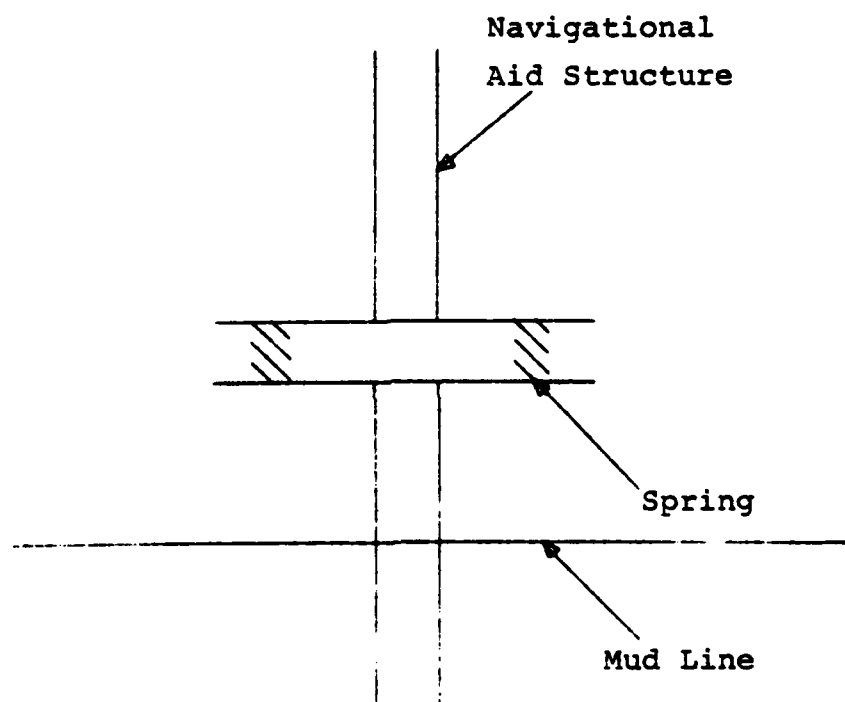


Figure 7. Spring Flexure Element

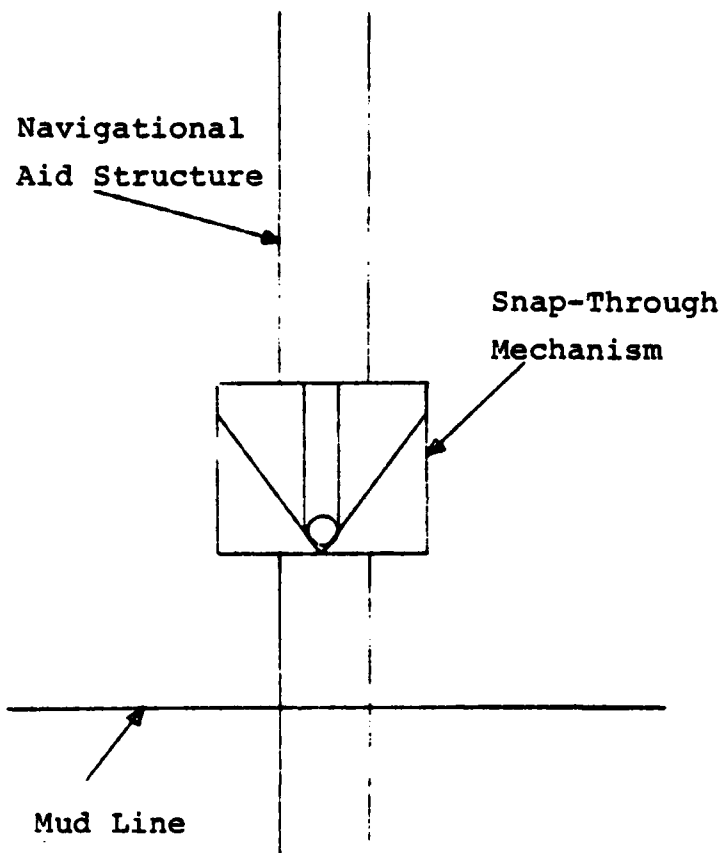


Figure 8. Snap Through Flexure Element

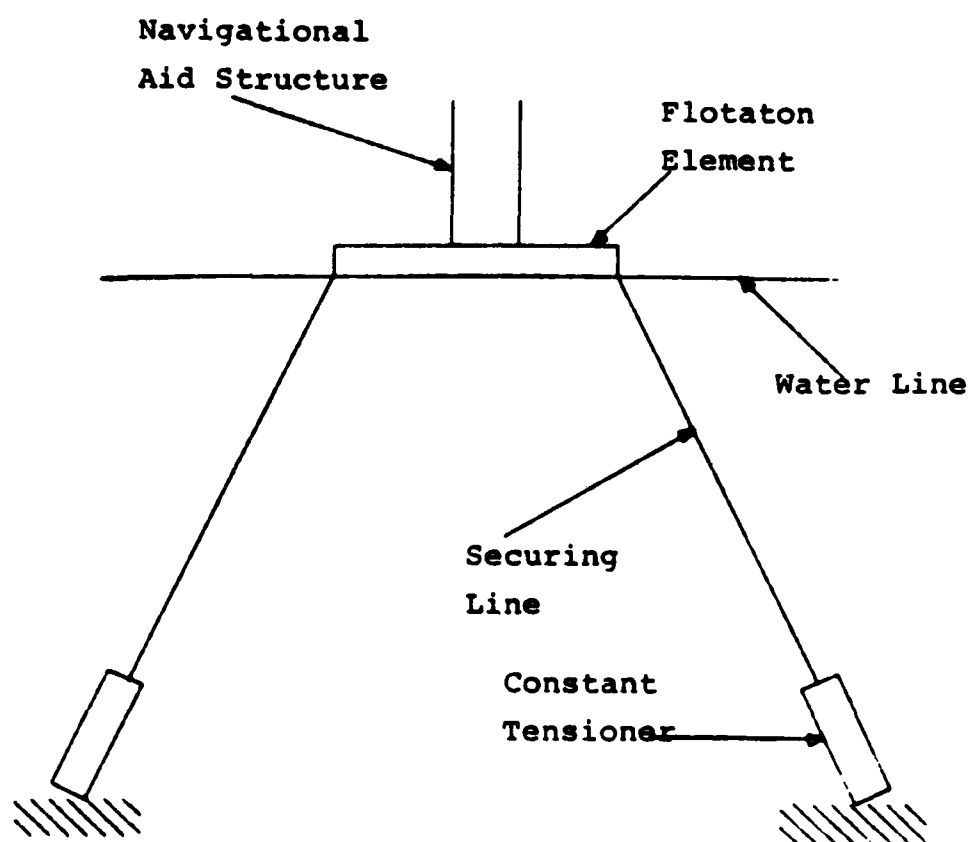


Figure 9. Tethered Floating Platform

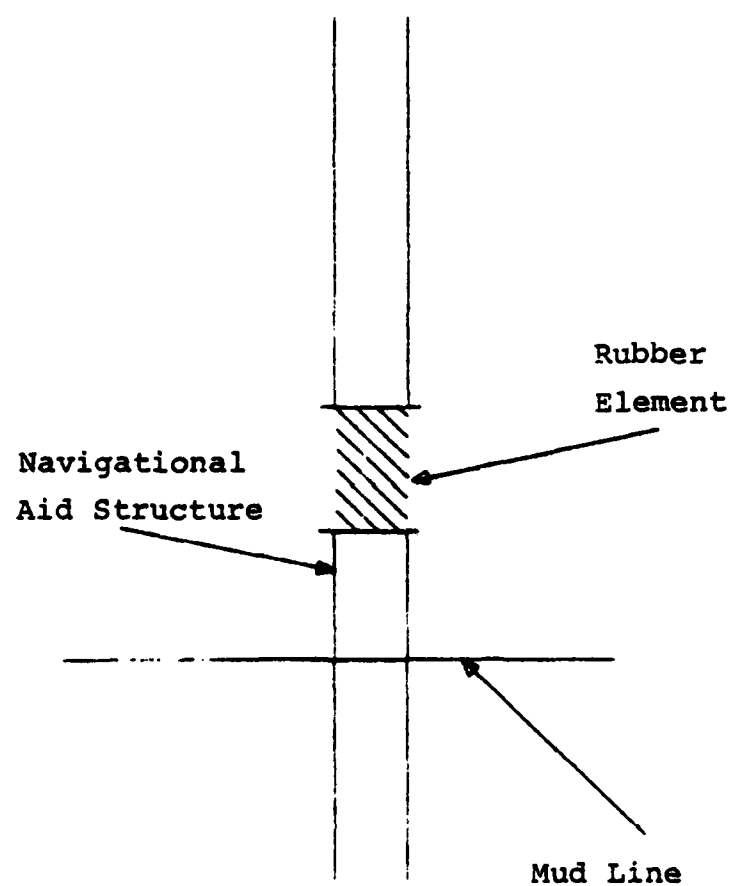


Figure 10. Rubber Flexure Element

serve as a flexure pivot. In the near vertical or on-design orientation the element will serve as a cylindrical beam.

V. MODEL DEVELOPMENT

The purpose of this section is to develop an insight and gain understanding into the behavior of a rubber cylindrical beam. The loading conditions assumed are similar to those that would be found if the beam were used as the flexure joint in the fixed marine piling.

A. ANALYTICAL APPROACH

The type of loading and expected reaction loads in the proposed system is illustrated in Figure 11. The primary steady loads are the moments due to environmental forces. These are: current loads on the piling, wind loads on the navigation marker, and wind loads on the above water piling. The dominant load is the current load. The transient or collision impact loads will of course be magnitudes larger than the steady loads.

The analysis of the CoTo system was modeled as a simple cantilever beam of circular cross section (pipe). As indicated in Appendices B and C, the various loads when acting in parallel with one another create the free body diagram noted. The linear differential equation relating the deflection v to the internal bending moment M in a beam is

$$\frac{d^2v}{dx^2} = \frac{-M}{EI} \quad (10)$$

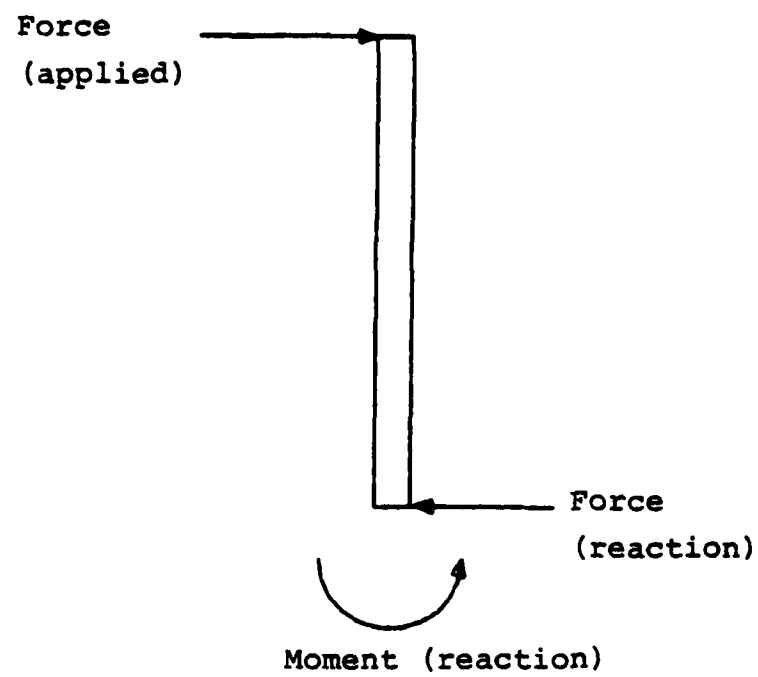


Figure 11. Free-Body Diagram

where X is the axial coordinate and EI is the flexural rigidity or bending modulus. For small angles, less than 5 degrees, θ will be approximately equal to the slope of the curve ($\tan \theta$). The deflection v and the slope of the deflection curve are related by

$$\frac{dv}{dx} = -\theta \quad (11)$$

Assuming loading intensity w can be related by

$$\frac{dV}{dx} = -w \quad (12)$$

and

$$\frac{dM}{dx} = V \quad (13)$$

The following set of useful differential equations is formed

$$\left. \begin{aligned} \frac{dv}{dx} &= -\theta \\ \frac{d\theta}{dx} &= \frac{-M}{EI} \\ \frac{dM}{dx} &= V \\ \frac{dV}{dx} &= -w \end{aligned} \right\} \quad (14)$$

[Ref. 2, p. 331]

These equations are called the equations of flexure for the bending of a beam. Appendix D shows the solutions of these differential equations for a fixed-free beam.

These relationships generally apply to isotropic materials which when loaded below critical values produce only small deflections (rotations $< 5^\circ$). Analysis of a beam with isotropic material properties relies on the linear relationship of stress to strain

$$\{\sigma\} = [E] \{\epsilon\} \quad (15)$$

Analysis of a beam with nonisotropic and nonlinear materials uses the nonlinear relationship

$$\{\sigma\} = [E(\epsilon)] \{\epsilon\} \quad (16)$$

However for very small deflections of rubber the classic methods of analysis can be used with reasonable results.

Because Hooke's Law of Proportionality between stress and strain does not hold for strains as large as are common with rubber, the modulus of elasticity is seldom used in the rubber industry.

As was indicated, bending of this beam is a very critical parameter in determining the failure mode of the model. Considered also is the snap-through action which occurs past certain deflection limits. This is similar to the onset of thin shell buckling. At this point, it must be noted that

there is no buckling "per se" in the large deflection of the beam that is loaded with transverse forces. However, as the cylindrical beam deforms, local buckling does occur when the original circular cross section collapses. Equation 17 relates the critical load for a geometry similar to the proposed configuration


$$P_{cr} = - \frac{Eh^2}{R[3(1-\nu^2)]^{1/2}} \quad (17)$$

[Ref. 3, pp. 151]


for the onset of thin shell buckling loaded axially as shown in Figure 12a. Loading of the model and identification of the "local buckling" zone is shown in Figure 12b.

The validity of Equation 17 relies on uniform axial loading and a D to d ratio approaching unity. Because the experimental model does not conform to either of these constraints Equation 17 will be of no value to predict the point of failure.

It was thus decided to approach the problem employing computer programs using finite element techniques. It was hoped that these codes would have the capability to address the configuration, and material in question. Two different computer codes were explored: GIFTS (Graphics-oriented Interactive Finite element Time-sharing System developed at the University of Arizona by Professor Hussein A. Kamel) and ADINA (A Finite Element Program for Automatic Dynamic

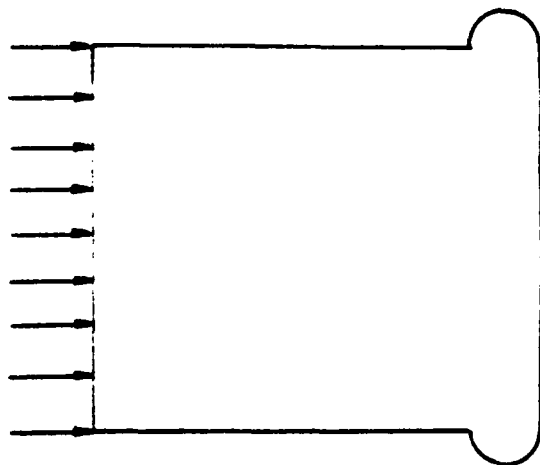

a) Axially Loaded Thin Shell

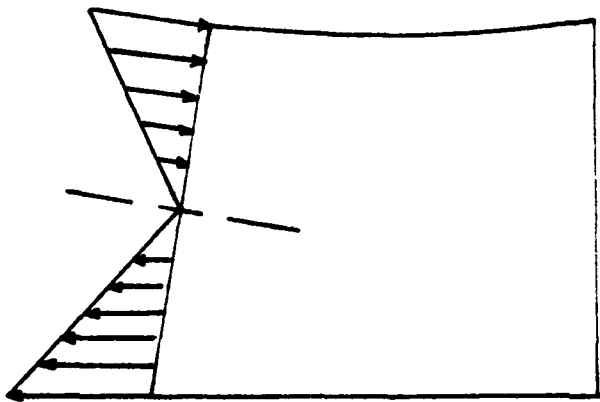

b) Model Loading

Figure 12.

Incremental Nonlinear Analysis developed by Klaus-Jurgen Bathe at the Massachusetts Institute of Technology.

1. GIFTS

The GIFTS program is a particularly useful code in addressing a wide variety of structural problems. Details of the GIFTS model used in this analysis are contained in Appendix E. Because GIFTS does not contain nonlinear analysis options, results achieved were not very encouraging and the program's use was not pursued further.

2. ADINA

ADINA was developed for the purpose of analyzing highly nonlinear systems due to either material nonlinearities and/or geometric nonlinearities. Details of the ADINA model are presented in Appendix F. The program output yields realistic results particularly in the small deflection range. It is the Adina code that was used to analytically predict deflections for the proposed flexure element.

B. EXPERIMENTAL CORRELATIONS

In order to validate the results of the ADINA model an experimental test program was designed and executed. A model rubber flexure joint was installed and tested throughout a wide deflection range. Loads and the resulting moments were related to the angular deflection of the system.

A schematic of the test apparatus is illustrated in Figure 13. A photograph of the flexure unit under test is presented in Figure 14. As shown, the testing apparatus fixes one end

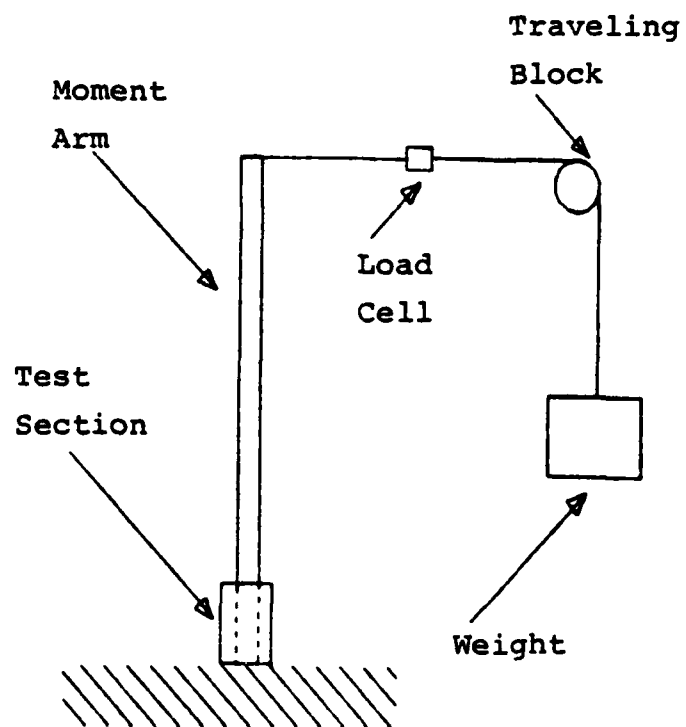


Figure 13. Schematic of Test Apparatus

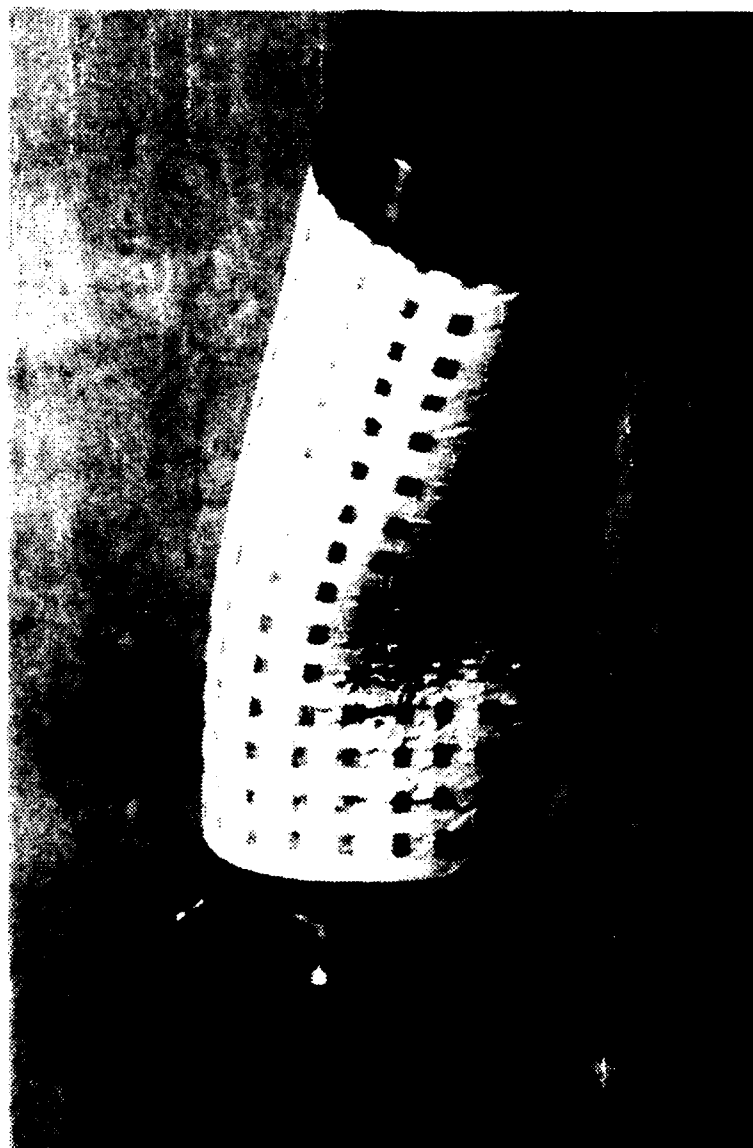


Figure 14. Element Test Section

of a beam and applies a known load transversely to the free end. The load remains perpendicular to the beam by means of a traveling block. As the load is applied and the beam deflects the slope of the beam is measured in degrees by an inclinometer fixed to the beam.

Two extruded rubber cylinders, 5 ft. x 5 in. (OD) x 2.5 in. (ID) of ASTM D-2000 grade rubber were purchased. The test cylinders were machined to outside diameters varying from 5 to 2.75 inches. Ratios of length to outside diameter were independently established at 2:1, 1:1, and $\frac{1}{2}$:1. This was accomplished by varying the insertion depth of the upper attachment fixture of the test apparatus. Appendix G is the tabular presentation of the results.

Figures 15a through 15f is a series of photographs depicting the progressive deformation of the flexure joint as increasing load is applied. It is evident that up to a certain angular deflection (Figure 15c) the geometry of the system remains circular. At a certain point the rubber cylindrical element begins to ovalize and the critical moment of inertia starts to decrease. This is shortly followed by complete geometric failure and extremely large angular deflections (Figure 15f).

The details of the experimental variables and pertinent physical dimensions are presented in Figure 16.

C. DISCUSSION

In evaluating the experimental results and comparing them to the results of the computer model it is first

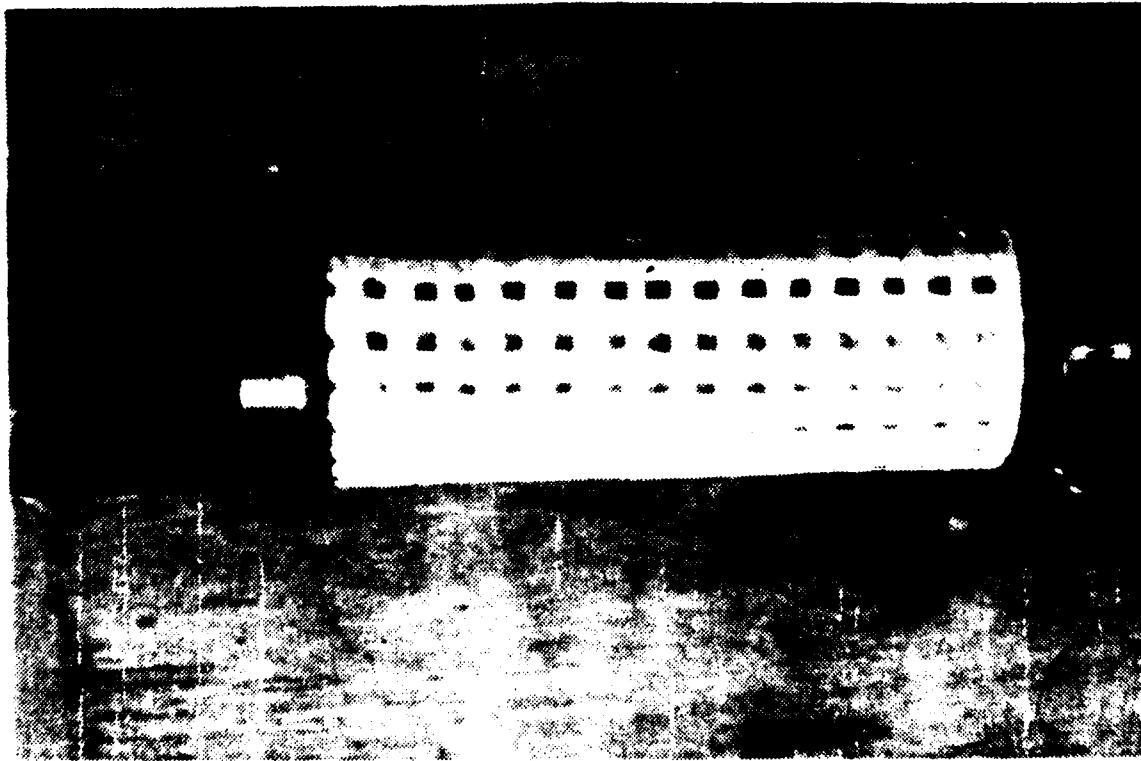


Figure 15(a)

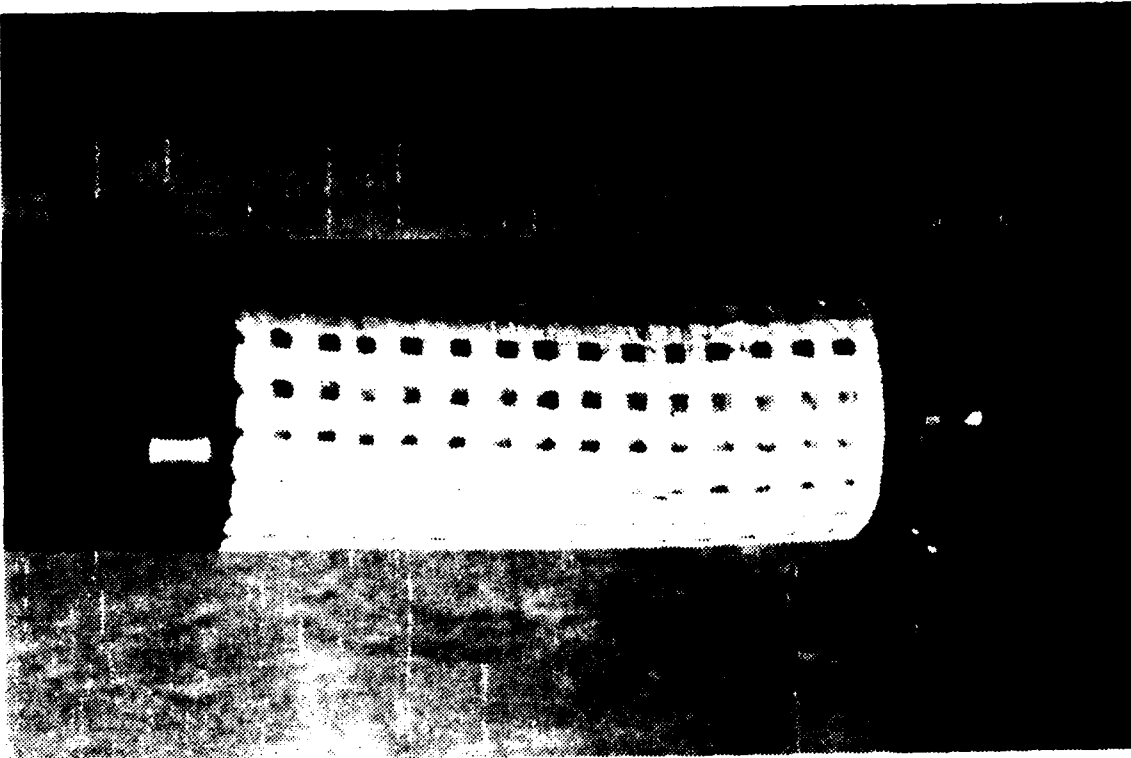


Figure 15(b)

Figure 15. Test Section Bending Sequence

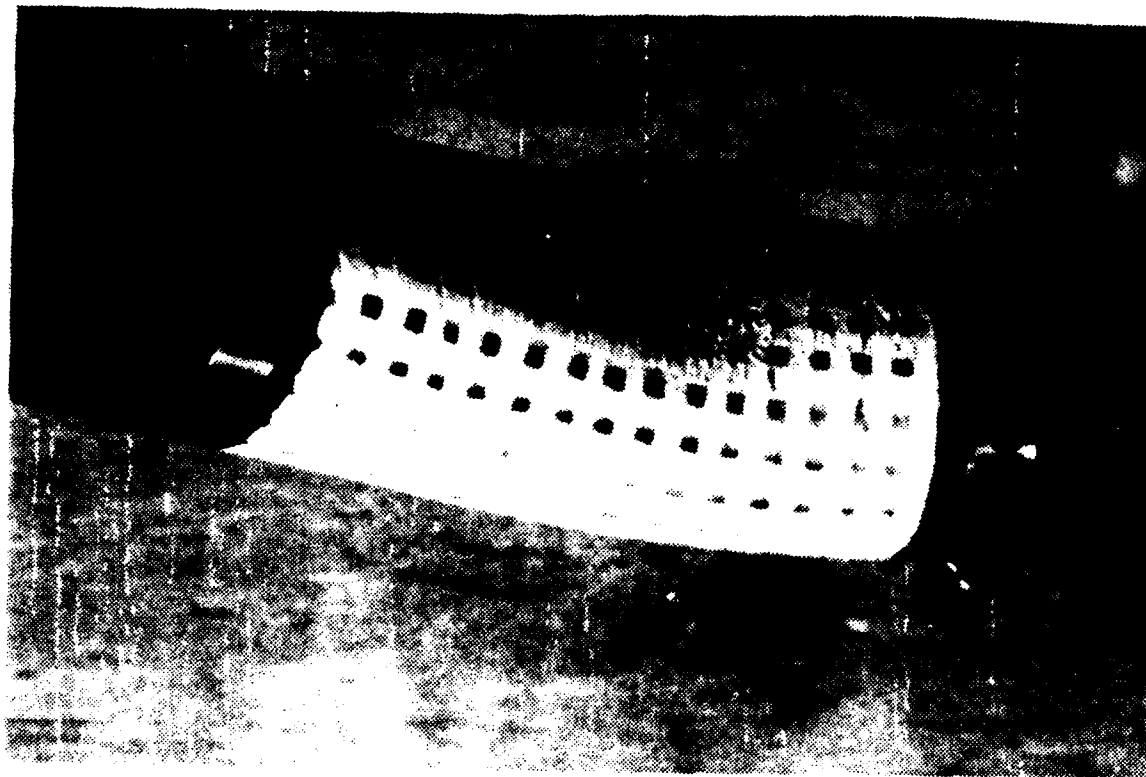


Figure 15(d)

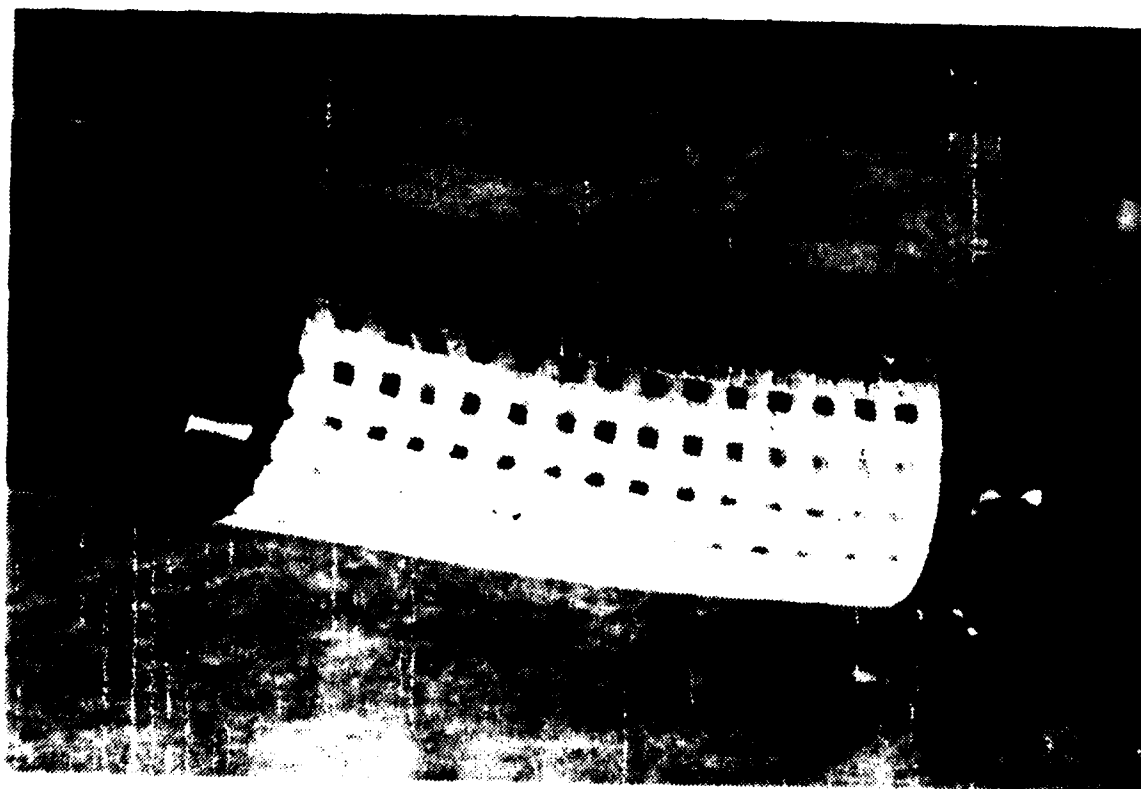


Figure 15(c)



Figure 15(f)

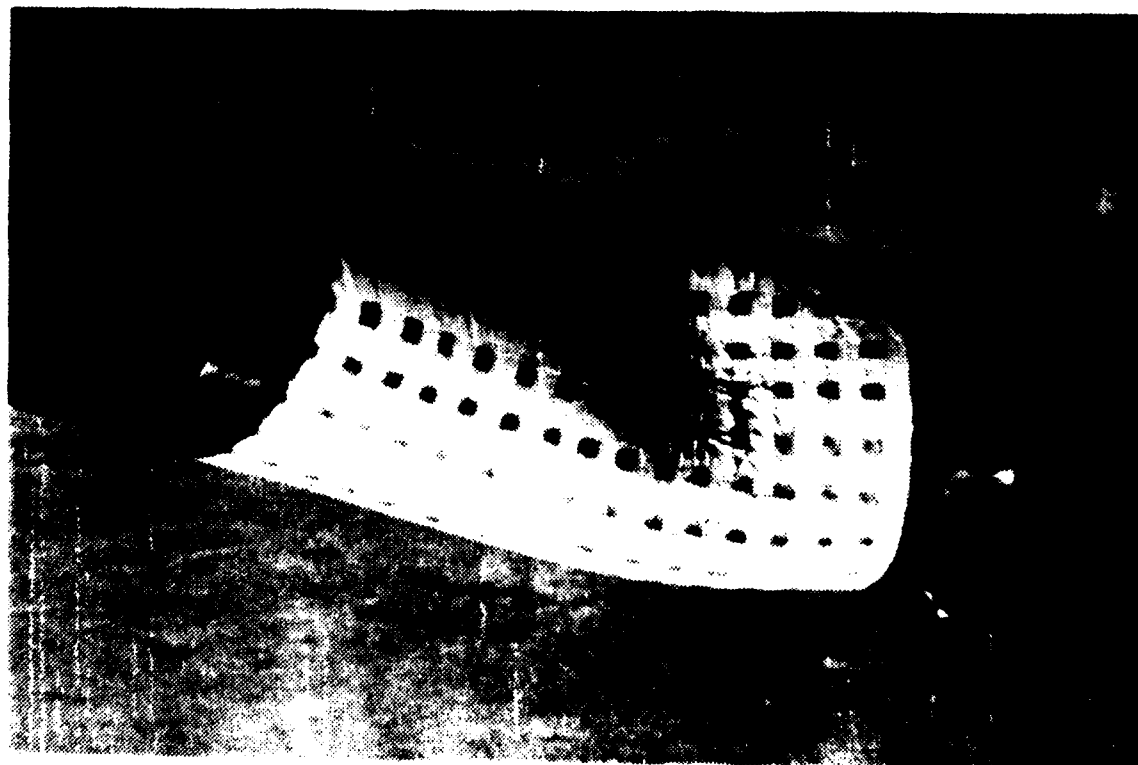


Figure 15(e)

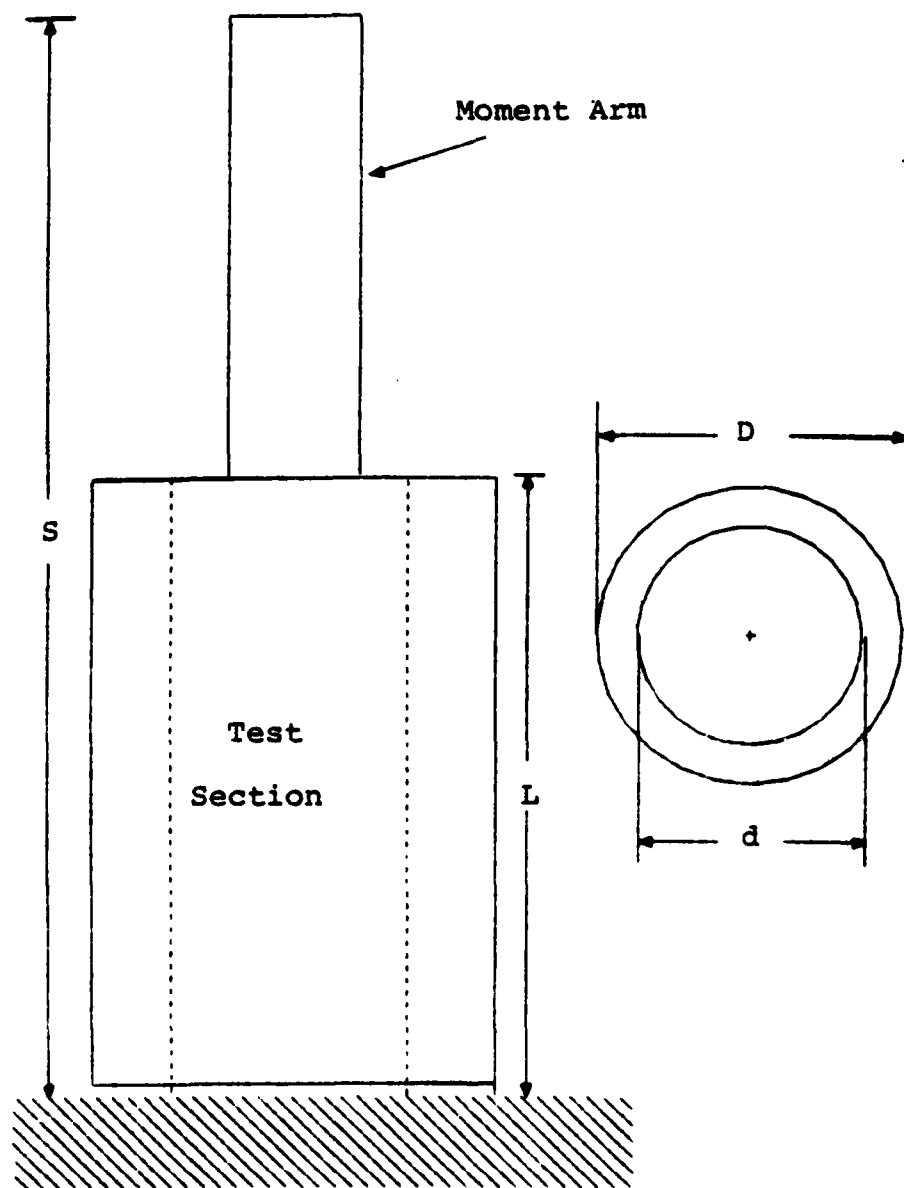


Figure 16. Test Section Dimensions

necessary to review possible avenues by which error may influence the outcome.

In the experimental model, two significant areas appear to introduce error. First, wall thickness variations of the test samples and second, creep of the material through the attachment or clamping mechanism.

The extruded rubber cylinders purchased for the experiment have a $\pm 10\%$ wall thickness tolerance. This corresponds to existing rubber industry standards for extruded geometries. The test samples were machined from these standard units. The machining operation and the available quality of the final surface cuts did not allow for precise control of the rubber sleeve wall thickness. For the thinner wall sections, i.e., 1/8 inch, the final cut roughness may have introduced variations on the wall thickness of up to 10%. In the thicker section samples this variation would have decreased.

The second probable source of error appears to have been the rubber test jig attachment point. The fastening system used to secure the loaded moment arm inside the test section and to fix the bottom end of the unit utilized 9/16 inch stainless steel hose clamps. As the test section was deflected by the applied load, up through 10° - 15° no appreciable creep through the clamps was noticed. This was confirmed by releasing the load and allowing the test material to regain its original position. Beyond 10° - 15° inclination, creep through the clamp introduced as much as 7° residual inclination with respect to the original unloaded case. This error

became more pronounced as the wall thickness was increased. Thus, on this basis, deflections at the very high angles are not likely to be very reliable. This may not pose a serious problem in the design phase as at this level of deflection the rubber cylinder has buckled and other, more drastic, phenomena are involved.

In the case of the ADINA modeling, two possible sources of error exist. In the first instance there are inherent limitations in the formulation of the ADINA program. While ADINA program is structured for "rubber" type materials, it is limited to 2-dimensional plane stress problems only. In order to model the test section, a 3-dimensional circular beam element was used in conjunction with an elastic-plastic material model. The choice of these two options was the closest available combination of models to the actual conditions.

As a result it is expected that ADINA will yield realistic results up to 10° or 15° of beam deflection. Beyond this point the material is part the range of validity of the computer's material properties.

The second source of error arises as a result of the aspect ratio (length/diameter) of the structural member. The computer model is a cantilever beam. As such the implied limiting length/diameter ratio is ideally in the range of 10:1. The actual geometry of the cylinder in question has a maximum length/diameter ratio of 2:1 and more closely resembles a short stubby beam than a long cantilever.

Figure 17 presents the results of a typical output from the ADINA program. It is observed that as the D/d increases, in the case of increasing wall thickness, the slope of the moment vs. deflection curves decreases. It is also seen that as the length/diameter ratio L/D increases the initial stiffness decreases. These trends are as one would expect. However, the key observation to be made is that the ADINA program does not predict the "snap-over" behavior expected in large deflection.

The experimental test program is summarized in Figure 18. In all cases progressive loading was maintained to deflections in excess of 40° . For the thin wall geometries, i.e., $D/d \approx 1:1$ to $1:1.26$ there was a definite "snap-over" phenomenon observed. This trend was not evident for relative thick walled cylinders, i.e., greater than $1:1.26$. The system continued to deflect without any evidence of discontinuity.

In the case of small L/D ratios, approximately .5, the flexure system developed a "lockup" characteristic. This is best described with the aid of Figure 19. As the system is loaded, inside edges of the sample holder pinch the sample material. The outside edges are furthest apart and place the sample material in tension. Beyond this point deflection of the system is "locked up".

It is thus apparent that the flexure geometry that will exhibit the desirable characteristics will involve relatively thin walls, (D/d) near unity, and have length/diameter ratios, (L/D) , in excess of 1:1.

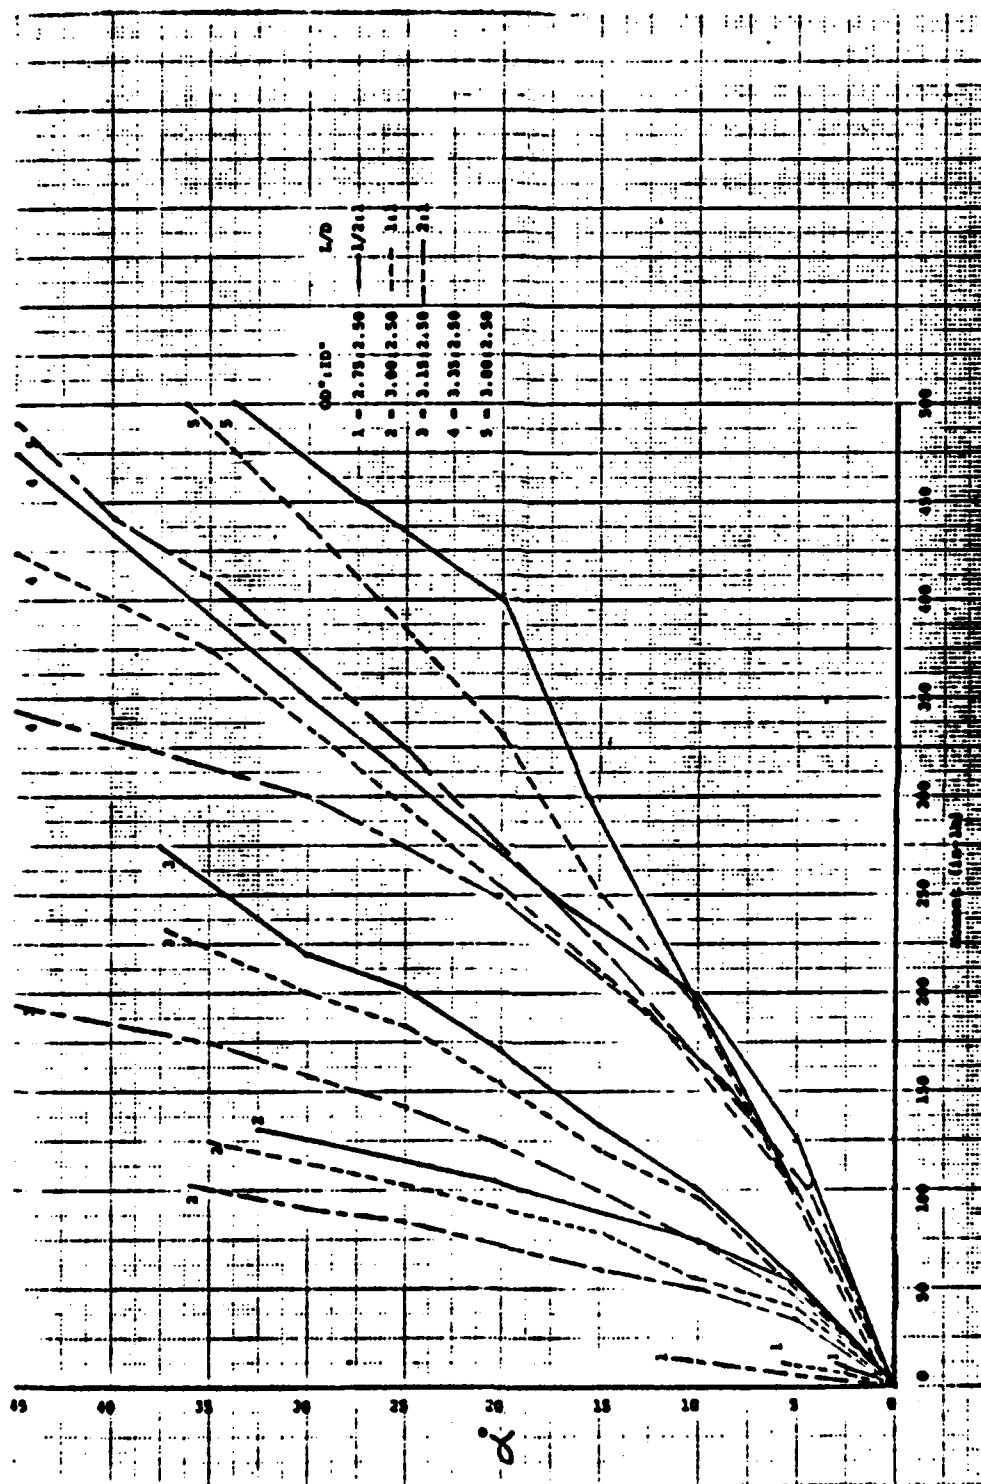


Figure 17. ADINA Output

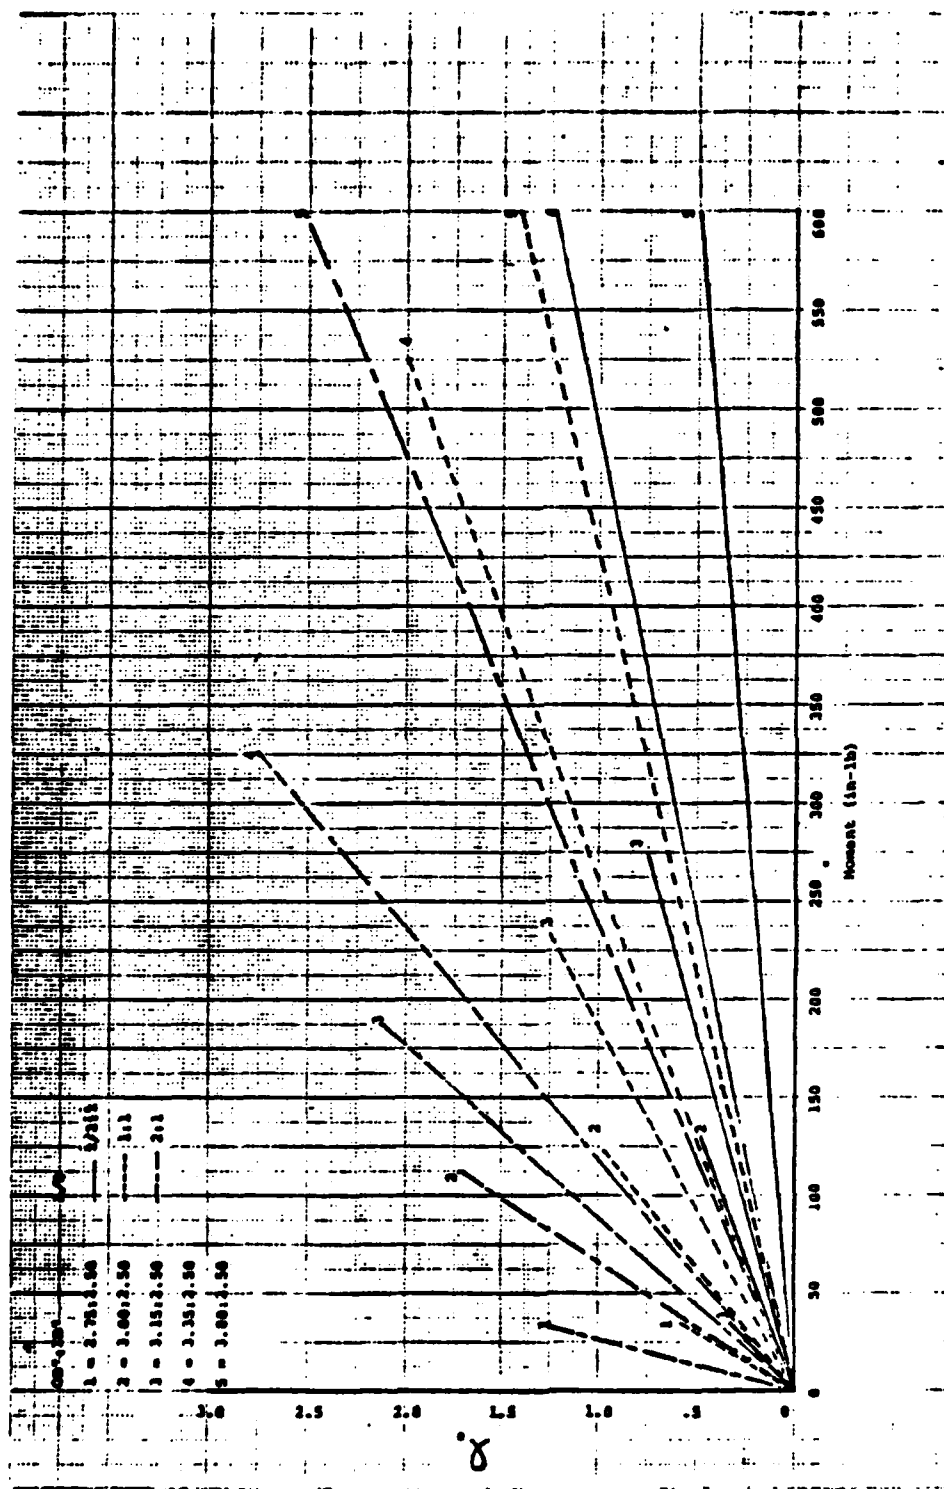


Figure 18. Experimental Test Data

Lockup
Area

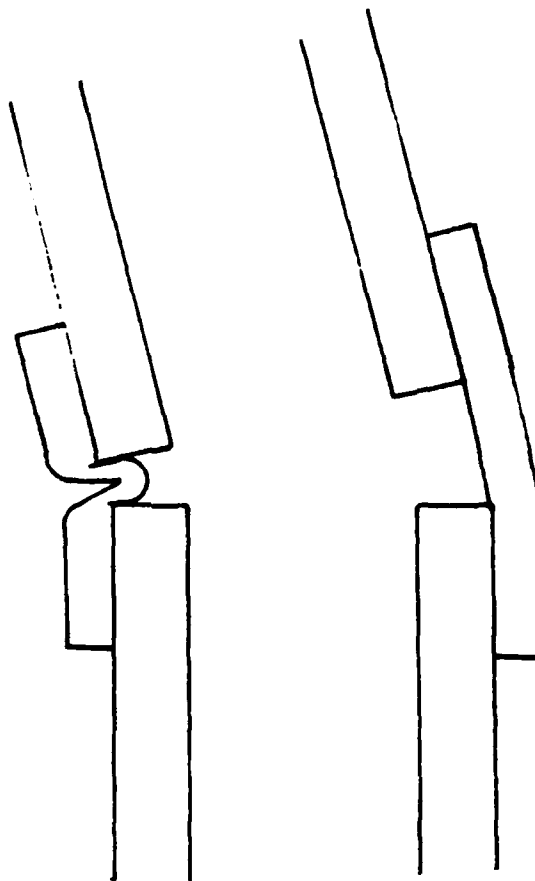


Figure 19. Lockup Characteristic

Figure 20 depicts a comparison between the ADINA theoretical results and the experimental test on a sample where $D/d = 1.26$, and $L/D = 2$. Excellent agreement is evident through a deflection of 10° . Past this point the trends diverge. Three distinct zones are evident in the experimental results. The first, the small deflection zone is consistent with the ADINA predictions for all geometries. The second zone involves a change in the moment/deflection curve slope but the geometry is still relatively axisymmetric. The third zone involves a rapid geometric adjustment which in turn results in large deflection.

It appears that the change of the characteristic slope in Zone II is the result of incipient buckling. It is difficult to precisely identify and explain the behavior in this phase as the geometry is continually adjusting and in fact different sections of the rubber material may be in either the elastic or plastic ranges.

In the completely collapsed mode, illustrated in Figure 21, the geometry has adjusted such that the circumferential walls fold over and form a nominal rectangular cross section. The width of this section is $\pi D/2$ and the thickness is $2t$, where t is the original tube wall thickness. In the fully deflected range, i.e., high α , the element will fail in the buckling mode. Figure 22 depicts both initial bending and buckled geometry.

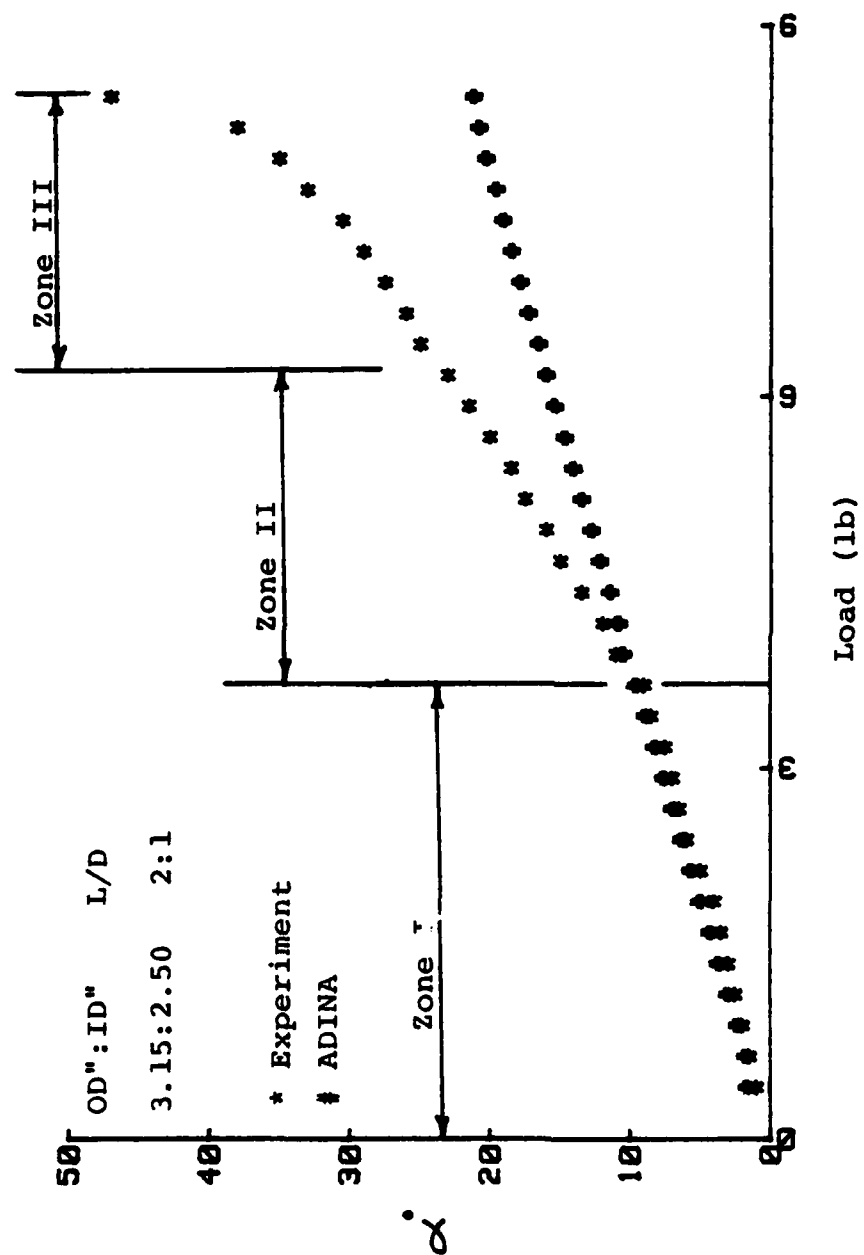


Figure 20, Comparison of Experimental Data and ADINA Output

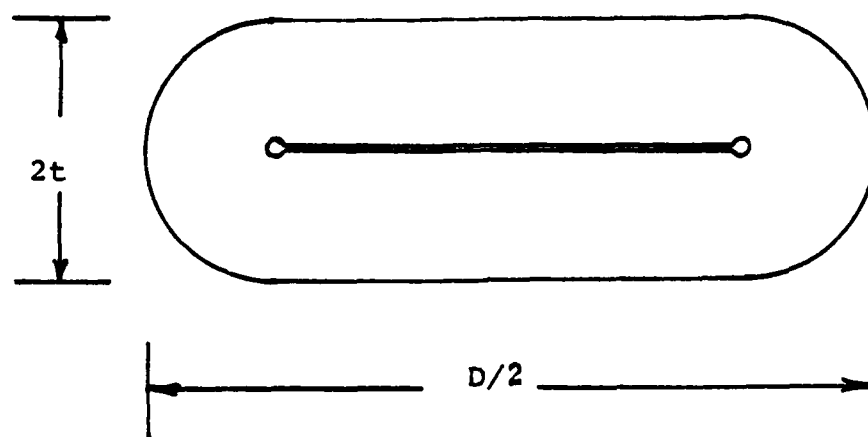


Figure 21. Collapsed Test Section

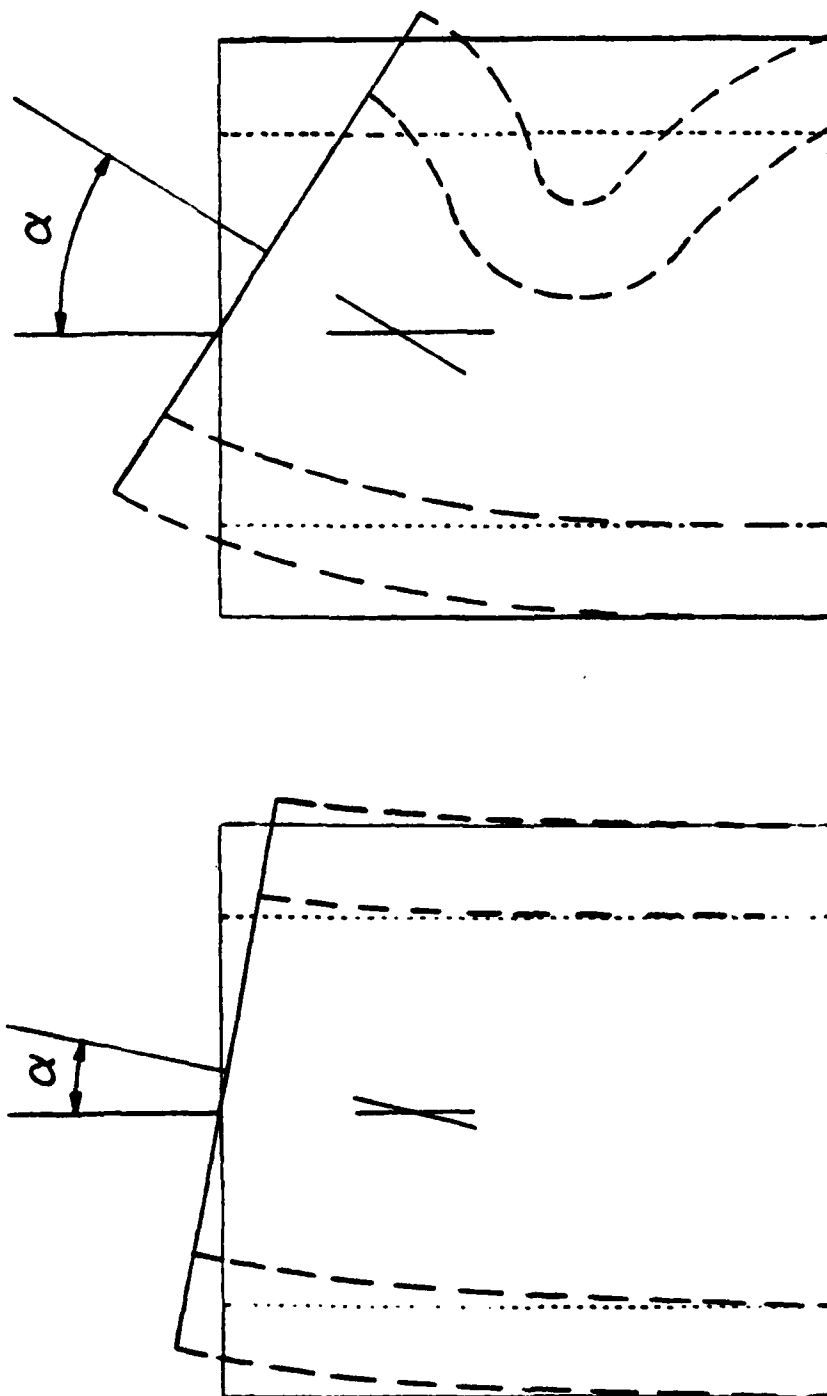


Figure 22. Buckling and Bending Mode

VI. DESIGN SYNTHESIS

The synthesis of the final configuration involved the trade offs of a large number of variables. Some of these were quite straightforward and quantifiable while others tended to be qualitative in nature and difficult to define.

Additional constraints were placed on the project by the U.S. Coast Guard that were more operational in nature. These include:

- a) Installation, maintenance, and removal of the CoTo marker system must be accomplished without the use of divers or sophisticated underwater instrumentation.

- b) The proposed CoTo system must not impose serious departures from present practices of pile fabrication and installation.

- c) The proposed CoTo system must fit within the capability of existing vessels and service platforms and must not require highly specialized handling and tooling equipment.

In review of the operational requirements of the CoTo marker system:

- a) Maintain vertical orientation with ± 15 degrees under specified environmental (wind and current) loading conditions.

- b) Fold or "snap-over" when greater loads (such as vessel collision) are applied.

- c) Regain vertical orientation within ± 15 degrees when collision loads are removed.

Thus there are two separate key loading conditions; the environmental loads which must be countered by the flexure joint reaction and the collision loads that result in the snap-over action of the system. In the case of the environmental loads a worst case design philosophy is followed. It is assumed that the current and wind loads will act in the same direction and have maximum values. For this situation to arise on site would require that all current, wind, and frontal orientation of the navigation marker be all in the same direction; a highly unlikely circumstance.

A. ENVIRONMENTAL LOADS

1. Current Loads

It was observed from Equation 2 that the piling loads due to the current are directly proportional to the piling diameter and increase as the square of the piling length (L^2). In order to minimize the loads on the rubber flexure system it would be desirable to have a minimum diameter and minimum length for the section of the piling above the flexure joint.

2. Wind Loads

The wind loads and the resulting moments generated on the flexure element are essentially constant. Variation in the worst case moment depends only on the physical distance between the nav marker proper and the flexure point.

From these considerations it is evident that the flexure point itself be located as near the surface as possible.

The piling diameter above the flexure should be as small as possible consistent with other loading conditions, i.e., top-side system weight. On the other hand, the flexure point must be deep enough to clear the draft of the marine traffic.

B. DESIGN IMPLEMENTATION

In order to incorporate the correlations between the experimental and analytical data into a full scale model many variables must be fixed. Appendix H contains detailed calculations concerning the sizing of a large flexure element. The process is summarized here.

a) Once a flexure type navigational marker has been chosen to be installed in a particular area, the geographic and environmental parameters must be set, i.e., current and wind speeds to be expected, maximum and minimum water levels, soil type and pile driving conditions, and local marine traffic patterns.

b) The type of navigational package to be supported by the structure will dictate piling size above the flexure element.

c) Based on loading conditions and size of piling to be used, the total moment is calculated using Appendices A and B.

d) Using Equation 17 [Ref. 2, P. 269]

$$\sigma = \frac{MC}{I}$$

apply the critical values of σ obtained from Appendix G, which correspond to certain critical levels of deflection, and knowing approximately what outside diameters are commercially available, solve Equation 17 for the critical inside diameter d . In order to maintain the desired snap-through action, the D to d ratio of the larger scale element should approach those of the experimental model.

Because of the addition of the flexure element in the piling system, the traditional driving sequence must be altered to accommodate the piling modification. Although many methods to accomplish the task exist, Figure 23 presents one method if utilized, after the initial driving sequence, if the marker needs to be changed, repaired, or removed no further use of a pile driver and its associated support equipment are required. First, an 18 inch steel pipe, acting as the male couple, is driven to the desired depth in the soil. A guide line can be attached to this fitting to help position the female coupling. The female coupling, with the flexure element and support piling attached, is lowered and mounted on its male counterpart using ship's handling equipment. Once the flexure element and support piling are in place, the navigational package is installed. As indicated, if the structure is damaged or needs replacement for any reason, the flexure element and support piling need only be pulled off the male coupling, repaired or replaced, then lowered back in its position.

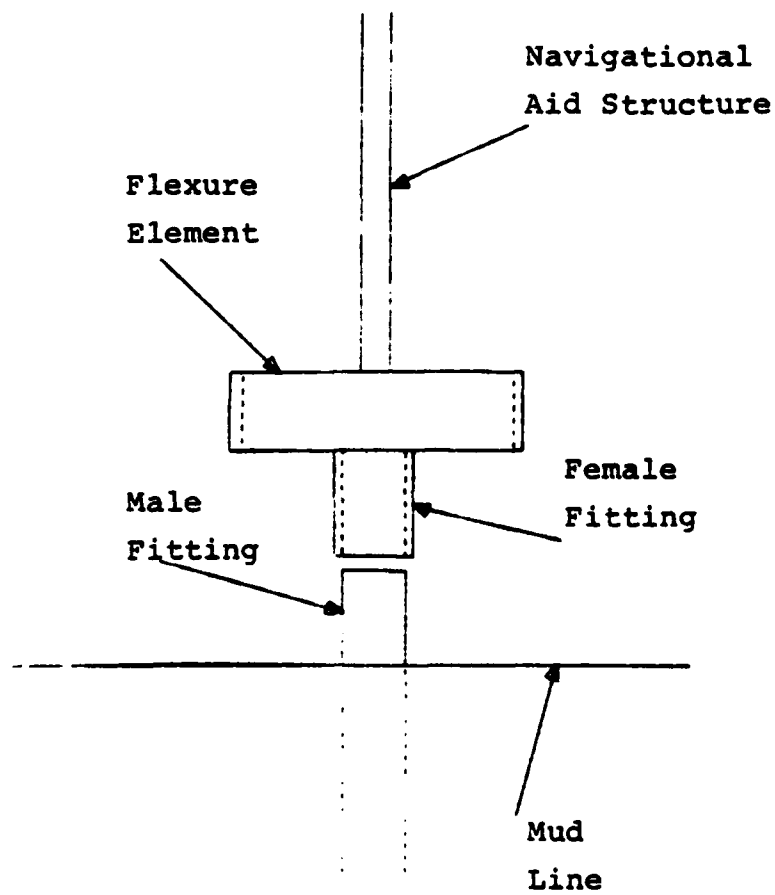


Figure 23. Installation Schematic

C. COST DIFFERENTIAL

Because of the addition of a large flexure element and associated attachment flanges, the material and in-house fabrication cost will be higher than the present system costs. It should be expected that initial installation will require more on-site time to position the male coupling and set the flexure element and navigational package in place. It is anticipated though, that the increased survivability will, when compared to the standard system, make the addition of the flexure element a cost effective modification. Figure 24 compares initial costs and life cycle costs through one collision of the standard system to the flexible system.

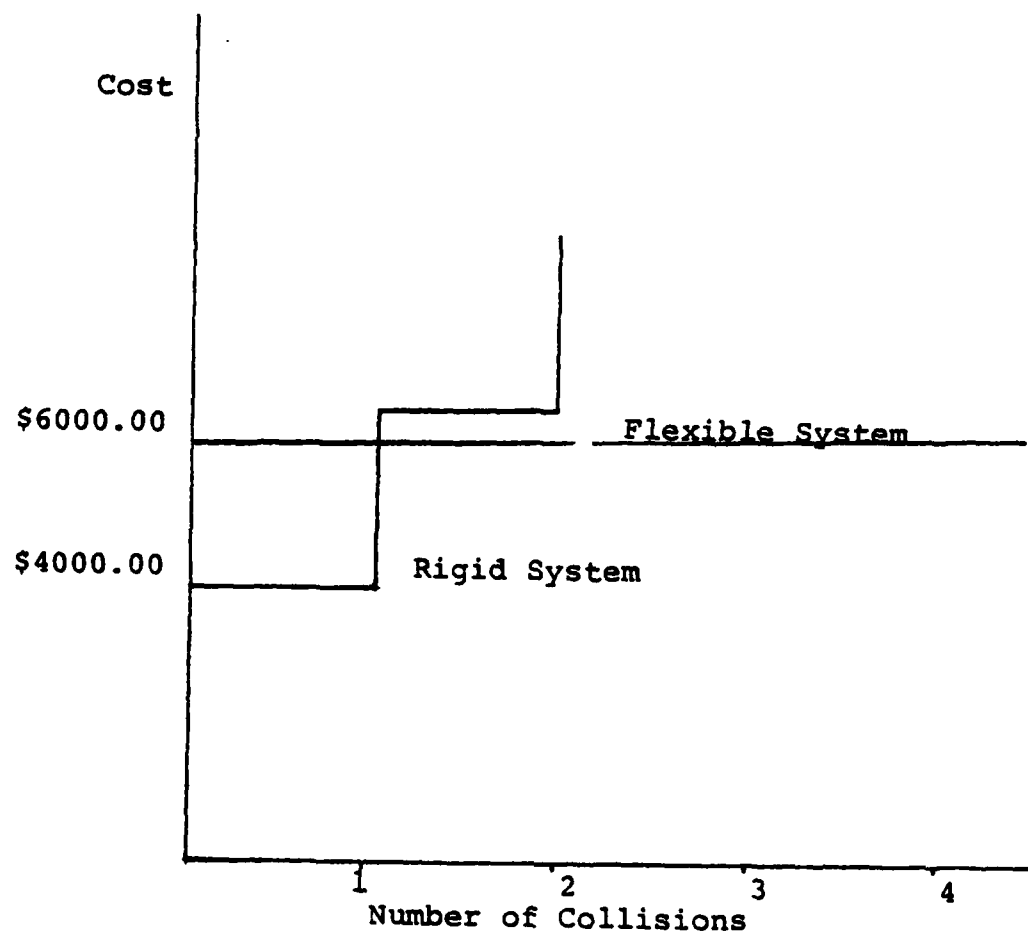


Figure 24. Cost Comparison

VII. CONCLUSIONS

In exploring the feasibility of the CoTo fixed navigational system an experimental model test program was used in an attempt to validate the results of a computer generated model under simulated environmental loadings. The results were very encouraging. It was found that good correlation between experimental model and computer model was achieved from 0 through 10-15 degrees of deflection. Beyond this range, for reasons enumerated within this paper, correlation was poor. It was determined that the results of the computer analysis could be used to predict deflections of the full scale model under the influence of the environmental loads.

Model testing has identified the D/d ratios coupled with the proper L/D ratio which allows for the desired "snap through" behavior. Angles of rotation at which the "snap through" occurs were also discovered through the experimental model tests. Computer analysis was of little value beyond the 15 degrees rotation because of the large divergence of the data and therefore will not be used to determine the "snap through" phenomenon when the element is scaled larger.

A. AREAS FOR FURTHER STUDY

As this work has dealt only with the "static" effect of the calculated environmental loads, no insight was gained

into the dynamic impact loading of this flexible structure. It is recommended that a full scale model be built and a series of impact tests be developed and implemented to determine the impact reaction of the flexure system.

As indicated in this study, as the "snap through" occurs and the local buckling, generated by the collapse of the section of rubber, begins, new dimensions are being created for the changing cross section. When this process is complete, the resulting stresses and strains in this section are very hard to accurately calculate. In turn, the calculation of the righting moment based on the newly formed cross section and resulting moment of inertia becomes very error prone. It is therefore recommended that full scale tests be conducted in conjunction with the impacting test to determine the systems reaction to the complete heel over of the marker's structure.

Any modification of the traditional pile driving sequence creates problems that cannot always be foreseen at the system analysis level. It would best serve the implementation of this system to allow the alternate pile driving scheme to be reviewed by the crews of the tenders with experience in handling such cumbersome tasks.

APPENDIX A

COMMERCIAL LITERATURE

MORSE Chain, Division of Borg-Warner Corporation *World-Wide Manufacturing Facilities*

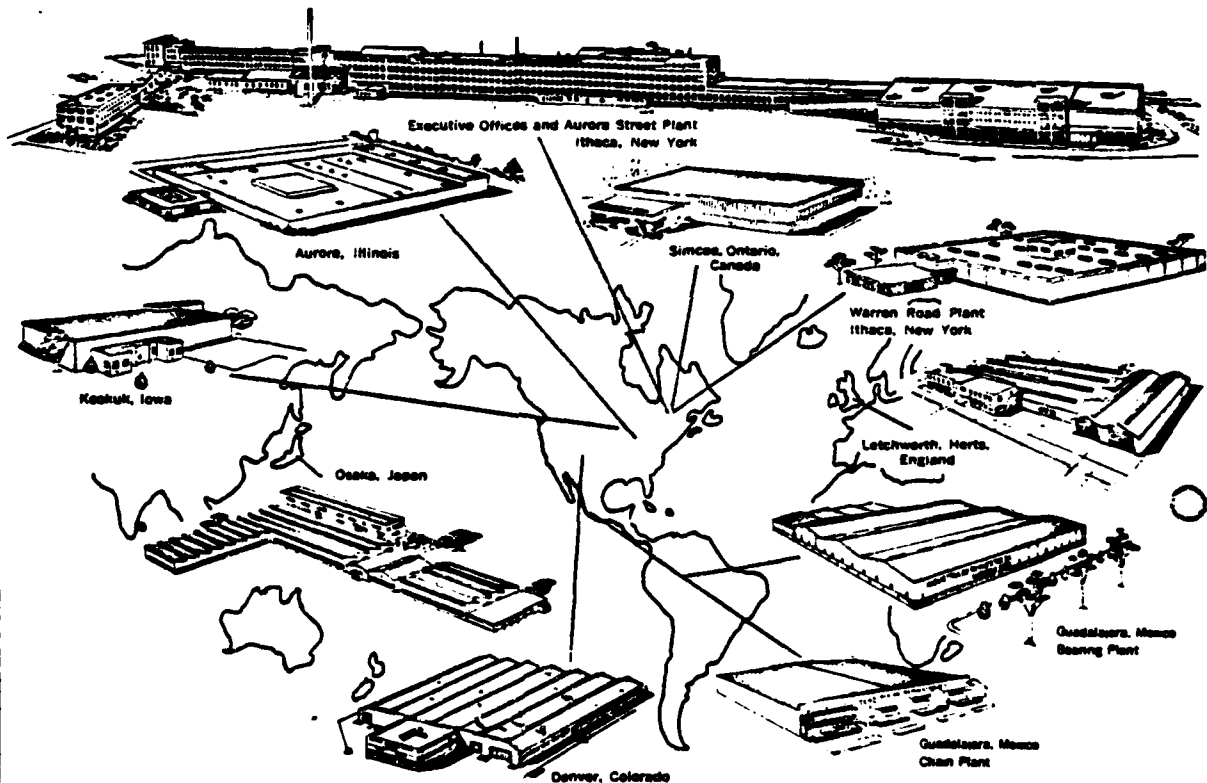



TABLE OF CONTENTS

Introduction to Marine Fendering	pages	1 and 2
Fendering Design	pages	3 thru 8
Fendering Selection	pages	9 thru 12
Shear Fenders	pages	13 thru 24
Buckling Column Fenders	pages	25 thru 34
Extruded Fenders	pages	35 thru 44
Bumpers	pages	45 thru 47

INTRODUCTION

Rubber has several properties which makes it an ideal material for use in dock fendering systems. It is an elastic material which will undergo a deformation under load, will absorb some of the energy of impact and will return to its original shape when the force is removed. Rubber fenders, for all practical purposes, are considered to be maintenance free. Their large bulk combined with modern compounding techniques make the fenders almost impervious to the effects of weather, sunlight, ozone, and salt water. The large variety in types of fenders available today and the many different ways they can be installed gives the designer a great deal of freedom in designing a fendering system.

Rubber is a member of a class of materials described as high molecular weight polymers; other members of this class being wood, cellulose, plastics, and resins. The distinguishing characteristic of rubber is that the molecular chains are more flexible and become elastic when cross-linked through the vulcanization process. The greater the number of crosslinks in the network, the greater will be the resistance to deformation when a force is applied. Reinforcing fillers such as carbon black when added to the rubber will further increase the resistance to deformation.



Hardness measurements are one of the basic methods used to characterize rubbers. It is essentially a measurement of the degree of elastic deformation produced by a specially shaped indenter under a specified load and is, therefore, related to the Young's modulus of the rubber. Tensile stress-strain properties are another method used to characterize rubbers and are used frequently for specifications and quality control during manufacture. The load-deflection curves for rubber in tension and compression are approximately linear for strains of the order of a few percent and values for Young's modulus E , can be obtained from these linear regions.

Although an elastic material, rubber is considered to be almost incompressible with a modulus of bulk compression similar to that of water. In order to act as a soft spring in compression, the rubber fenders must be given the opportunity to bulge laterally. Fender shape must accommodate the movement, resulting in different physical con-


figurations to satisfy the requirements of a variety of applications.



ENVIRONMENTAL EFFECTS

As a fender, rubber will be exposed to the effects of sunlight, oxygen, ozone, temperature variations and salt water and, in some cases, to the additional effects of industrial chemicals.

Black rubber fenders are effectively protected from deterioration by sunlight because the carbon black fillers block out the ultraviolet radiation. Light colored fenders are more susceptible to oxidation that is initiated by ultraviolet radiation. Elevated temperatures will accelerate the degradative attack by both oxygen and ozone. There are some factors which will minimize these effects.

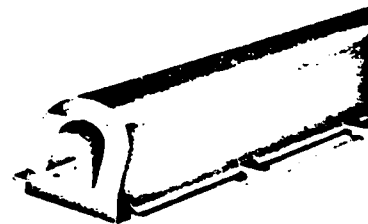

First, protective agents are incorporated in the rubber formulations. Second, the fenders are not subjected to an environment of elevated temperatures. Third, oxidative attack can take place only on the surface of the rubber and, because of the large cross-section of rubber in these fenders, the overall effect is negligible.

Ozone attack of rubber is becoming a matter of increasing concern as concentrations of ozone in the atmosphere appear to be increasing each year. It requires only a concentration of a few parts per hundred million of ozone to crack unprotected rubber in a matter of weeks. However, there are some characteristics of ozone attack which again make its effect on fenders negligible. A certain minimum tensile strain is required before ozone cracks will appear. This minimum strain is about 10 to 20%, the cracks forming perpendicular to the direction of strain. In compression, the rate of ozone attack is slower by the order of a hundred times than when in tension. Again, ozone attack is a surface problem and will have drastic effects on

thin cross-sections and almost no effect on large cross-sections.

Some types of rubber such as "EPDM" and "Butyl" are inherently resistant to attack by ozone. Other rubbers commonly used in fenders such as "Natural" rubber and "SBR" will require the use of protective materials in the formulation in addition to the careful design of the part to minimize areas that will be subjected to tensile strain.

Fresh or salt water will not have any detrimental effect on the rubber even if the fenders are to be immersed for long periods of time. Hydrocarbon

liquids such as oils, solvents, and fuels will seriously degrade rubber fenders. However, an occasional spill will not be harmful because the amount of liquid absorbed is proportional to the square root of the time the liquid is in contact with the rubber.

In terms of resistance to chemicals, rubber is considered to be inert in most instances. It is resistant to salts and alkalis and most acids, the exceptions being concentrated sulfuric, nitric and chromic acids.


ELASTOMER PROPERTIES CHART

PHYSICAL PROPERTIES		NR NATURAL RUBBER	SBR STYRENE BUTADIENE	CR NEOPRENE	EPDM ETHYLENE PROPYLENE DIMONOMER	IIR BUTYL	NBR NITRILE BUTADIENE
POLYMER SPEC. GR.		.93	.93	1.23	.96	.92	1.00
DUROMETER RANGE		30-100	30-100	40-95	30-90	30-100	30-100
TENSILE STRENGTH (PSI)		4000+	3000	3000	2500	2000+	3000
ELONGATION (%)		TO 700	500	TO 800	TO 500	600	TO 700
TEAR RESISTANCE		EXCELLENT	GOOD	GOOD	FAIR	GOOD	GOOD
WEATHER RESISTANCE		FAIR	FAIR	GOOD	EXCELLENT	EXCELLENT	FAIR
OZONE RESISTANCE		POOR	POOR	GOOD	EXCELLENT	EXCELLENT	POOR
WATER RESISTANCE		EXCELLENT	EXCELLENT	FAIR	EXCELLENT	EXCELLENT	GOOD
OIL & GASOLINE RESISTANCE		POOR	POOR	GOOD	POOR	POOR	EXCELLENT
SOLVENT RESISTANCE	ALIPHATIC HYDROCARBON	POOR	POOR	GOOD	POOR	POOR	EXCELLENT
	AROMATIC HYDROCARBON	POOR	POOR	POOR	FAIR	POOR	GOOD
BRITTLE POINT (°F)		-80	-80	-40	-90	-80	-85
STIFFENING POINT (°F AVG.)		-40	-35	-10	-35	-25	-10
COMPRESSION SET		GOOD	GOOD	FAIR	FAIR	FAIR	GOOD
TEMPERATURE RESISTANCE	212 °F	FAIR	GOOD	GOOD	EXCELLENT	EXCELLENT	EXCELLENT
	350 °F	POOR	POOR	POOR	FAIR	FAIR	FAIR
	450 °F	POOR	POOR	POOR	POOR	POOR	POOR
GAS IMPERMEABILITY		GOOD	FAIR	GOOD	GOOD	EXCELLENT	GOOD
ABRASION RESISTANCE		EXCELLENT	EXCELLENT	GOOD	GOOD	EXCELLENT	GOOD
FLEX RESISTANCE		EXCELLENT	GOOD	GOOD	GOOD	GOOD	FAIR

DESIGN


Morse manufactures three basic types of fenders; extrusions, buckling fenders and shear fenders.

Extruded fenders will normally have cross-sections that are either cylindrical, rectangular or triangular; each having a hollow bore to increase the deflection for a given load.

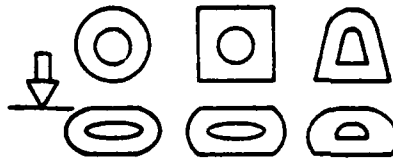


When a curved surface of a rubber fender is compressed against a rigid plane, the stiffness generally increases as the area of contact increases during deformation. The load-deflection characteristics then are non-linear. For a hollow section there is a sharp increase in stiffness as soon as the amount of deflection equals the diameter of the bore.


Extruded fenders work well in applications where the loads to be absorbed are not so large that the required deflection exceeds the fender's capability. They also are ideal for rub rails on line hulls, docks and concrete walls to prevent damage by scraping. A typical load-deflection curve for a cylindrical extrusion is shown below.



The "buckling" fender has several advantages over the extruded type of fendering. It is based on a buckling column principal and is basically a molded column of rubber bonded to steel end plates.



The characteristics of the buckling fender are that it requires a relatively large load to initiate any deflection and only a small additional load to collapse the fender to full deflection. After the fender is collapsed, any further deflection will require a sharp increase in the load. The fenders are designed to buckle in a predetermined direction. The buckling fender then can provide a so-called "soft" fendering system for large loads by absorbing large amounts of energy at a given deflection compared to fenders used in compression. Buckling fenders must be restrained from undergoing lateral movement in operation as it will reduce their effectiveness. Below is a typical curve for a buckling fender.




Shear fenders consist of rectangular blocks of rubber bonded to steel end plates and are designed to react to loads in shear.



In addition to providing a "soft" fendering system such as the buckling fender, shear fenders have some definite advantages over buckling fenders. The deflection of a shear fender is not limited to one direction; therefore, the designer need not be concerned with restricting those forces that are not normal to the dock. The shear fender will accommodate loads not normal to the dock and can even function when in torsion or compression. If a deflection greater than the design limits of the individual shear fender is required, it can be obtained by bolting two or more fenders together. The typical load-deflection curve for a shear fender is linear which illustrates that a shear fender does not

exhibit a sudden resistance to additional load as happens with extruded fenders and buckling columns (compare the representative deflection curves).



CALCULATIONS

When a fender system is to be designed, it will usually fall into one of three general categories:

1. It can be an existing dock that is to be improved and upgraded to more modern standards.

2. It could be a new or existing facility that is strong enough that horizontal docking forces on it are secondary to vessel hull reaction force limits.
3. It could be a new facility, open dock or dolphin, built on jacketed piles and requiring the most efficient and economical fendering system possible to provide docking for large vessels.

Although the formulas used are the same in each case, the values assigned and the unknowns calculated from these assignments will require careful evaluation to determine priorities in each individual case.

To insure that the key factors are taken into account, a table listing pertinent items is included. It should be filled out as completely and accurately as possible as the first step in design.

ITEM	UNITS	VALUE	OTHER UNITS	NOMOGRAPH
VESSEL DISPLACEMENT	LONG TN.		KIPS (LG. TNS. x 2.24)	4
VESSEL LENGTH	FEET		METERS (FT. x .305)	2
VESSEL BEAM	FEET		METERS (FT. x .305)	1
VESSEL DRAFT	FEET		METERS (FT. x .305)	1 & 2
ALLOWABLE HULL REACTION	KIPS		MET. TN. (KIPS x .453)	
ALLOWABLE DOCK REACTION	KIPS		MET. TN. (KIPS x .453)	
APPROACH VELOCITY-MAX. V_F	FT / SEC		MET/SEC (FT/SEC x .305)	3
APPROACH ANGLE α	DEGREES		NONE	3
COEFFICIENT OF ECCENTRICITY	NONE	USUALLY 0.5	BERTHING COEFF.	

FENDER SELECTION CHART					
ITEM					
1	MAX. REACTION (FROM TABLE 1) LOWEST REACTION-HULL OR DOCK			KIPS	
2	CALCULATED ENERGY "E" (FROM NOMOGRAPH NO. 4)			FT KIPS	
3	DESIGN MAX. $R = \frac{E}{L}$ $E = \text{ITEM 2}$			KIPS / FT KIP	
4	PRELIMINARY FENDER SELECTION				
5	R/E OF FENDER (FROM FENDER APP. CURVE AT DESIGN DEFLECTION)				
6	LOAD "R" OF FENDER AT DESIGN DEF. (FROM APP. CURVE) KIPS				
7	ENERGY "E" OF FENDER AT DESIGN DEF. (FROM APP. CURVE) FT-KIPS				
8	QUANTITY OF FENDERS REQD. TO MEET THE LOAD: $\text{ITEM 1} / \text{ITEM 6}$				
9	QUANTITY OF FENDERS REQD. TO MEET ENERGY ABSORPTION: $\text{ITEM 2} / \text{ITEM 7}$				

The basic energy formula as stated by Newton is:

$$E = \frac{1}{2} MV^2$$

E = Energy of a body (vessel) in motion
 M = Mass = Weight/Gravity Constant
 V = Velocity of the body in motion

This formula has been modified to include the following factors in dock design:

- Vessel displacement calculated and converted to units of mass (M)
- Hydrodynamic effect of water moving with the vessel and pushing it (Two methods outlined)
- Velocity component at 90° to the dock facility
- Coefficient of eccentricity or berthing coefficient
- Coefficient of facility construction

The working formula therefore becomes:

$$E = \frac{1}{2} \left(\frac{W_T}{g} \right) (V_n)^2 (C_E) (C_C)$$

$$W_T = W_V + W_C + W_H$$

Where E = Energy to be absorbed by the fendering

W_T = Total effective displacement (converted to Kips)

W_V = Weight of the light vessel (converted to Kips)

W_C = Vessels cargo weight DWT (converted to Kips)

W_H = Hydrodynamic effect

g = Gravitational constant

V_n = Velocity of vessel normal to the dock

C_E = Coefficient of eccentricity or berthing coefficient

C_C = Coefficient of facility construction

Note: 1 Kip = 1000 pounds

Determine the total mass M : the mass of the empty vessel plus the mass of the cargo plus the hydrodynamic mass.

$$M = \frac{W_T}{g}$$

W_T is the total effective displacement converted to Kips. It can be determined by either of two methods:


$$1. W_T = W_V + W_C + W_H$$

W_H , the hydrodynamic effect, describes the displacement of water moving with the vessel. A method for approximating the hydrodynamic effect is to assume a cylinder of water moving with the vessel that is equal in length to the vessel and of a diameter equal to the vessel's draft. Nomograph ≈ 1 will give a ready reference solution to the formula:

$$W_H = \frac{\pi}{4} D^2 L P$$

Where P is the density of water

WATER CYLINDER TECHNIQUE

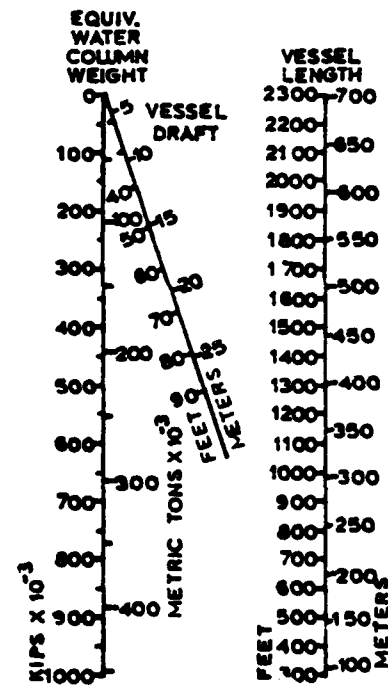

No. 1

W_V is the weight of the vessel light or empty. The maximum value for the class of vessel to be docked at the facility should be used. Usually expressed in long tons, or metric tons, this value should be added to W_C which is the DWT (Dead weight tons) of cargo the vessel is designed to carry. Since all units in this guide refer to Kips or metric tons, long tons must be converted to Kips by multiplying by 2.24

An alternate method for determining W_T , the total effective displacement, is:

$$2. W_T = (1 + \frac{2D}{B}) (W_V + W_C)$$

Where $(1 + \frac{2D}{B})$ is the hydrodynamic coefficient

and

D = Draft of the vessel

B = Beam of the vessel

Since D and B have the same units, the coefficient is dimensionless and can be used with any units of weight. Use of Nomograph No. 2 is convenient for determination of this coefficient and has D and B in both feet and meters.


A third school of thought states that W_H need not be considered with open dock construction. Alonzo De F. Quinn in his book *Design and Construction of Ports and Marine Structures* (2nd ed. Page 384) states "When the vessel is berthing against an open pier or dolphins on piles where there is little obstruction to the water moving with the ship — additional weight may be disregarded."

Mass is determined by dividing the total equivalent weight W_T by the gravitational constant


$g = 32.2$ ft. per sec.² for English units

$g = 9.814$ meters per sec.² for metric units

V_n : The velocity normal, or at a right angle to the dock face or breasting line in the case of dolphins, is the only velocity component used in calculating the berthing energy load. V_n is further defined and illustrated in the sketch below. Even though the vessel may dock under its own power or be tug assisted, V_n is always the vector 90° to the dock. Nomograph No. 3 gives values of V_n in both feet per second and meters per second for approach angles up to 30°.

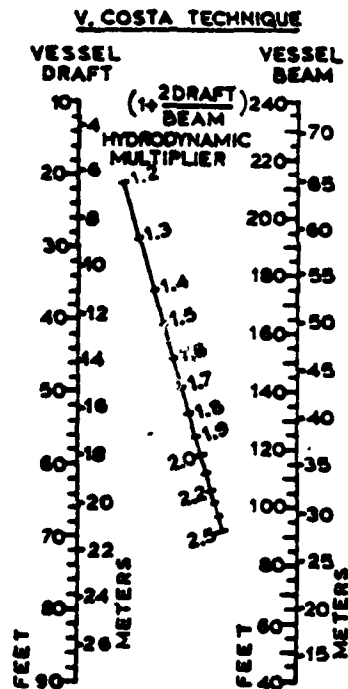

No. 2

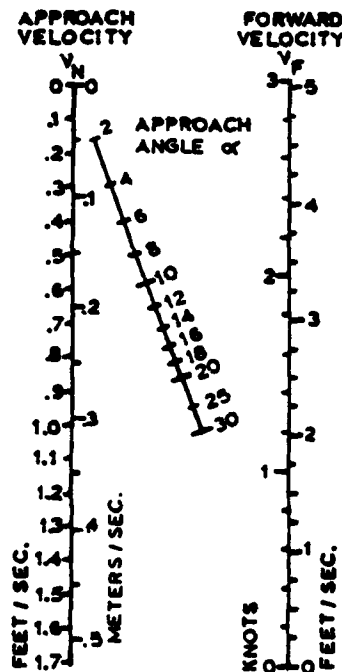


No. 3

$$V_n = V_r \sin \alpha$$

Where: V_r = Velocity of the vessel relative to the dock
 α = Angle between V_r and the dock face (90° or less)
 called the approach angle



When a vessel docks under its own power,
 V_r = Vessel Heading and α is approximately equal
 to the heading angle

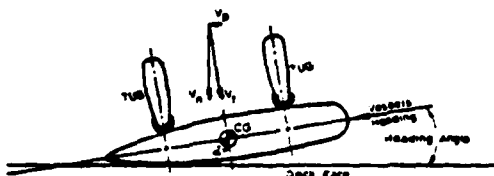

When a vessel is tug assisted in docking, $V_r = 90^\circ$
 to the Vessel Heading and α is approximately the
 complement of the heading angle

C_E : The coefficient of eccentricity, or berthing coefficient, as it is sometimes referred to, takes into account that the vessel does not always berth with its longitudinal axis parallel to the dock face. In moving to this position from some angle, the vessel rotates about its center of gravity (C.G.). This rotation uses up some of the Kinetic energy that would otherwise be taken by the dock fendering if the vessel contacted parallel to the dock and at the midpoint of the vessel. Therefore, if a vessel makes initial contact with a dock at something other than parallel closing, not all of the energy needs to be absorbed by the fenders. The amount of attenuation is relative to the geometry of the vessel and the point at which it makes initial contact with the dock. Mathematically expressed as:

$$C_E = \frac{K^2}{K^2} + A^2$$


Where K = Radius of gyration of the vessel
 A = Distance between the vessel's C.G. and the point of impact with the dock

If a vessel can be assumed to be an ellipse, then

$$K = \frac{L}{4} \text{ or } 0.25L$$

Ellipse ($K = L/4$)


Vessels approx. shape

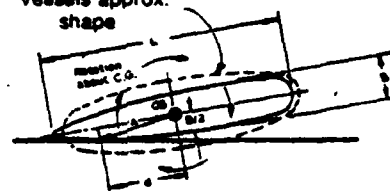

To calculate A , the point of contact with the dock must be determined and the beam of the vessel must be known. Then from the Pythagorean theorem:

$$A^2 = \left(\frac{B}{2}\right)^2 + d^2 \text{ (see sketch above)}$$

From many calculations on many vessels, it has been determined that C_E can be related to the point of contact with the dock and relates as follows:

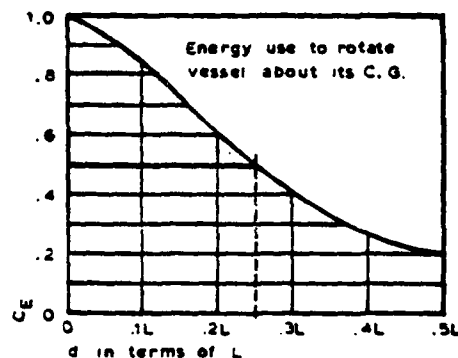


From observations of many dockings, C_E has been found to average 0.5 and unless specific information is known about docking conditions and vessel configuration, this value is generally accepted.

C_C : The coefficient of construction adjusts the value of energy to be absorbed based on dock construction. Some typical values for C_C are listed below:

Jacket pile (open construction) - 1.0

Continuous wall or sheet pile - 0.8

This coefficient has not been included in the design of Nomograph 4 (shown on page 8) for determination of berthing energy, therefore, the designer should choose a value using the above examples as guidelines and insert it into his final calculations.

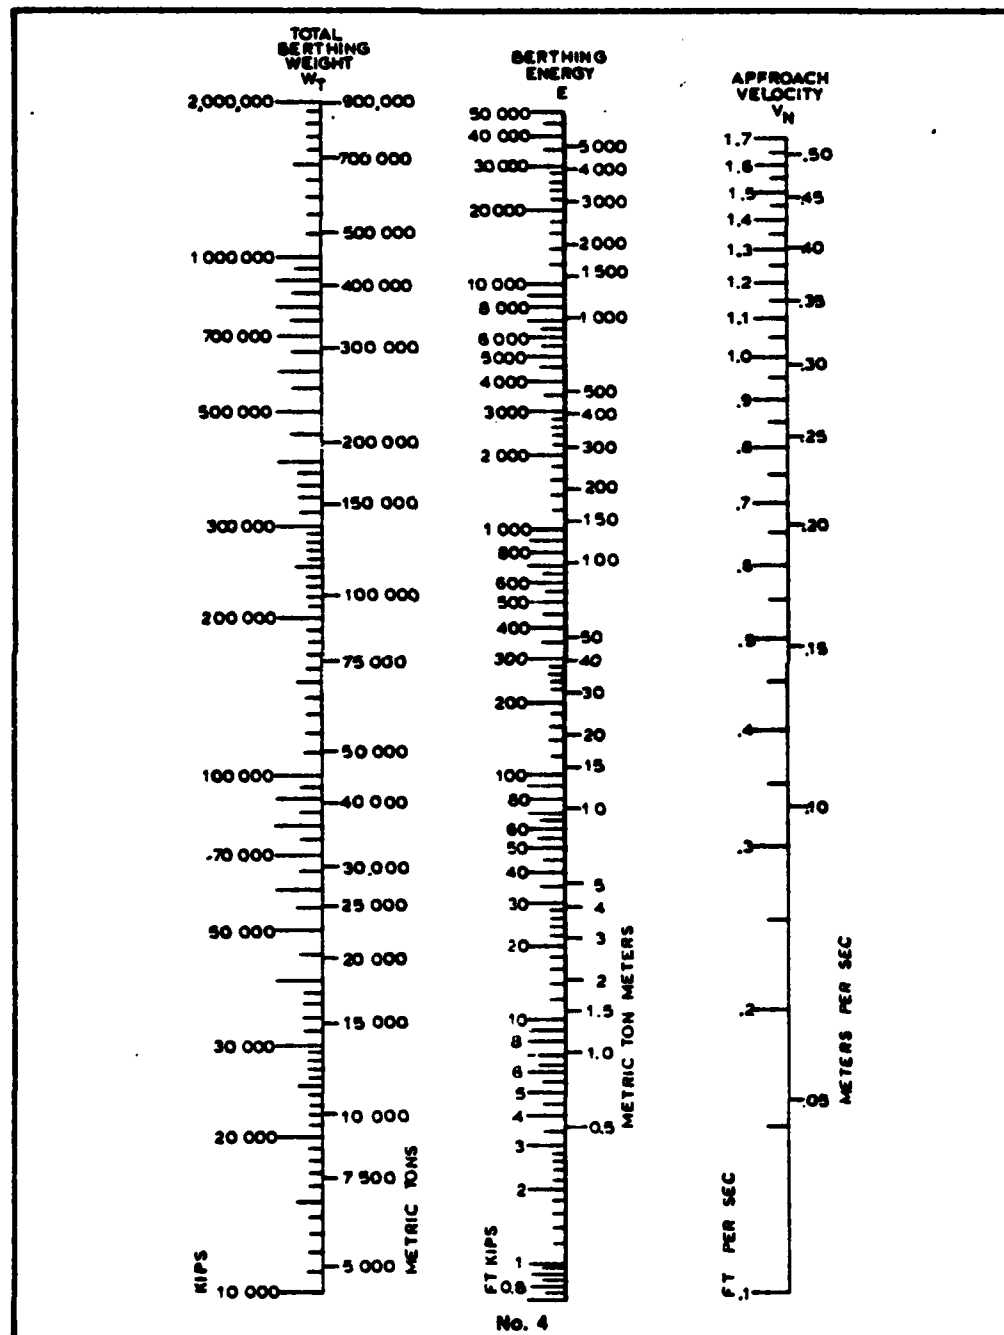

FENDER SELECTION

STEP 1

List all pertinent information per Table I (shown on page 4)

ITEM	UNITS	VALUE	OTHER UNITS	NOMOGRAPH
VESSEL DISPLACEMENT	LONG TN	150,000 L.T.	KIPS (LG. TNS. x 2.24)	4
VESSEL LENGTH	FEET	1000 FT.	METERS (FT. x .305)	2
VESSEL BEAM	FEET	150 FT.	METERS (FT. x .305)	1
VESSEL DRAFT	FEET	56 FT.	METERS (FT. x .305)	1 & 2
ALLOWABLE HULL REACTION	KIPS	1000 Kips	MET. TN (KIPS x .453)	
ALLOWABLE DOCK REACTION	KIPS	15,000 Kips	MET. TN (KIPS x .453)	
APPROACH VELOCITY-MAX. V_F	FT / SEC	2.5 FT./sec.	MET/SEC (FT/SEC x .305)	3
APPROACH ANGLE α	DEGREES	10°	NONE	3
COEFFICIENT OF ECCENTRICITY	NONE	USUALLY 0.5	BERTHING COEFF.	

STEP 2

Determine the total berthing weight. In this example, the water cylinder technique will be used to determine the additional berthing weight caused by the hydrodynamic effect. Thus:

$$W_T = W_V + W_C + \frac{\pi D^2 L \rho}{4}$$

or

W_T = Displacement plus water column

Substituting from Table I and converting to Kips gives:

$$W_T = 150,000 \text{ lg. tns} \times \frac{2.24 \text{ Kips}}{\text{lg. tn}} + 154,000 \text{ Kips}^* = 490,000 \text{ Kips}$$

*This value from Nomograph 2 (shown on page 6), using D and L from Table I above. Note: All three methods of obtaining W_T are compared at the end of this sample calculation.

STEP 3

Determine the normal berthing velocity (V_n)

From Table 1 $V_F = 2.5 \text{ ft./sec.}$

From Nomograph 3 (shown on page 6), or using the formula $V_n = V_F \sin$

$$V_n = .43 \text{ ft./sec.} \quad \text{pick}$$

STEP 4

Determine the berthing energy:


$$E = \frac{1}{2} \left(\frac{W_T}{g} \right) (V_n)^2 (C_E) (C_C)$$

To determine the total berthing energy, values must be established for C_E and C_C . For simplicity, the value of C_E will be assumed to be 0.5, a generally accepted average value unless specific design states otherwise. It is this value that was used in the design and layout of Nomograph 4 (shown on page 8). C_C will be taken as 1.0, assuming open jacketed pile construction. This value was also used to design and layout Nomograph 4. If other than these values are used, appropriate mathematical adjustments must be made in the values obtained using Nomograph 4, or the entire equation could be calculated. Therefore, using Nomograph 4, if $V_n = 0.43$ and $W_T = 490,000$ Kips then E can be determined from Nomograph 4 to equal:

$$E = 703 \text{ Ft. Kips}$$

MORSE

landing selection

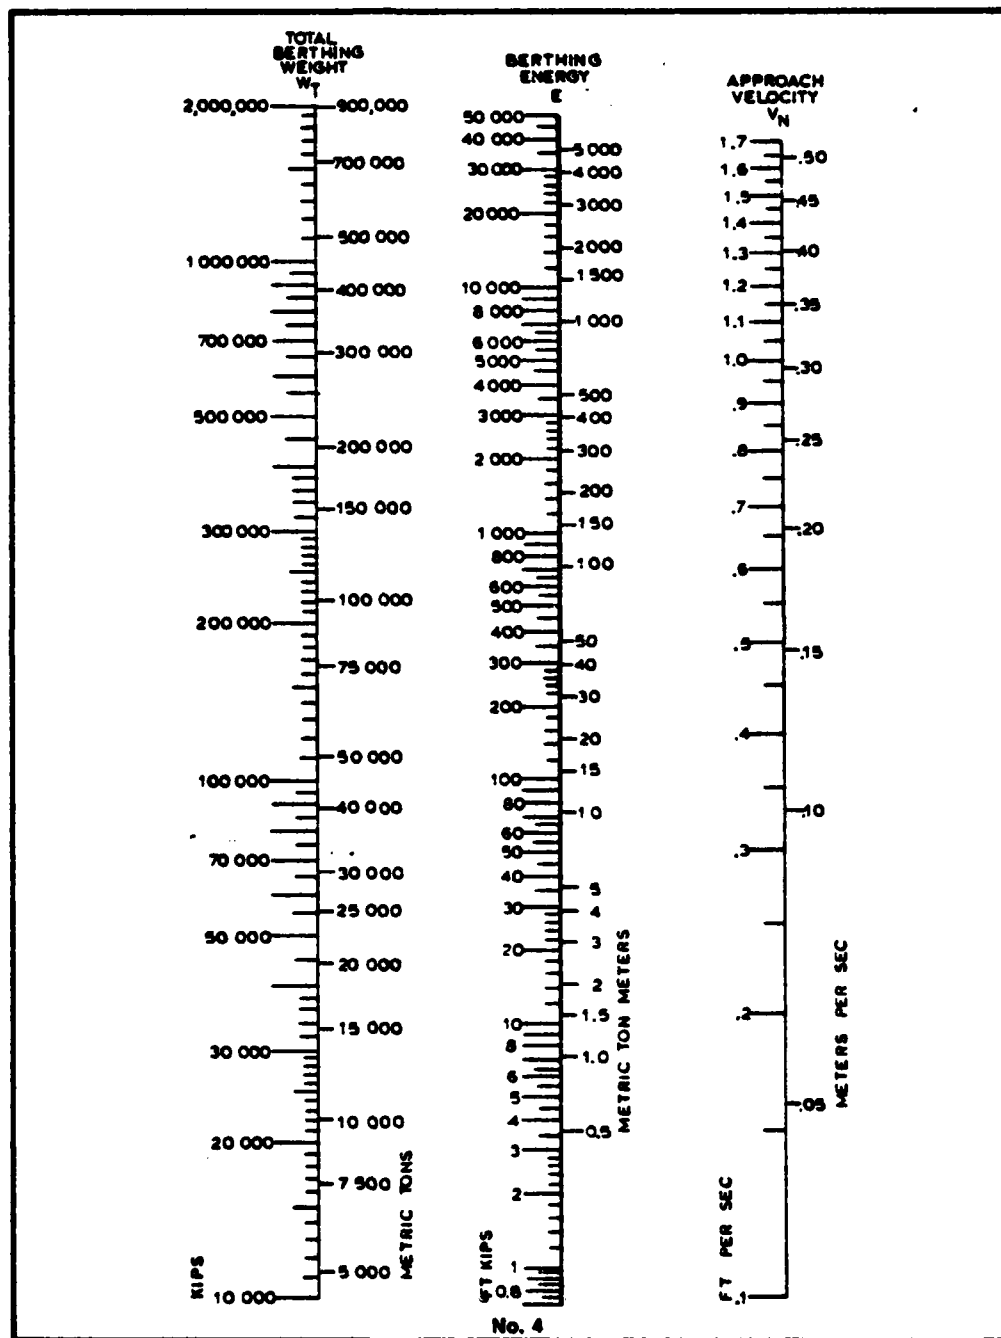

STEP 5

Referring to the example in Table I (shown on page 4), determine the maximum R/E acceptable. From Table I it is seen that the limiting factor is the allowable hull reaction. That value is 1000 Kips. Therefore,

$$R = 1000 \text{ Kips}$$

From the previous step using Nomograph 4: (shown on page 10)

$$E = 703 \text{ Kips}$$

The ratio then is:

$$\frac{R}{E} = \frac{1000 \text{ Kips}}{703 \text{ Kips}} = 1.42, \text{ maximum allowable value.}$$

STEP 6

After studying the R/E curves for Morse fenders, list all fender selections that meet the R/E specification of 1.42 or less at the desired deflection. For this example, the rated deflection will be assumed to be the design deflection; however, other systems may be designed to have specific deflections other than the rated deflection.

Looking at the application curves for R/E, the following fenders are found to have suitable values:

12" Shear Fender 33" Buckling Column
14" Shear Fender 48" Buckling Column
16" Shear Fender




STEP 7

Fill in the fender selection chart.

FENDER SELECTION CHART					
ITEM					
1	MAX. REACTION (FROM TABLE I) LOWEST REACTION-HULL OR DOCK	1000	KIPS		
2	CALCULATED ENERGY "E" (FROM NOMOGRAPH No 4)	703	FT KIPS		
3	DESIGN MAX. $\frac{R}{E} = \frac{\text{ITEM 1}}{\text{ITEM 2}}$	1.42	KIPS/FT KIP		
4	PRELIMINARY FENDER SELECTION	12" S.F.	14" S.F.	16" S.F.	33" B.C. 48" B.C.
5	R/E OF FENDER (FROM FENDER APP. CURVE AT DESIGN DEFLECTION)	1.25	1.1	.98	1.00 .63
6	LOAD "R" OF FENDER AT DESIGN DEF. (FROM APP. CURVE) KIPS	12.5 Kips	17 Kips	21.5 Kips	21 Kips 38 Kips
7	ENERGY "E" OF FENDER AT DESIGN DEF. (FROM APP. CURVE) FT KIPS	10 ft. Kp.	15 ft. Kp.	22 ft. Kp.	21 ft. Kp. 59 ft. Kp.
8	QUANTITY OF FENDERS REQD. TO MEET THE LOAD. = ITEM 1 / ITEM 6	80	58.8	46.5	47.6 26.3
9	QUANTITY OF FENDERS REQD. TO MEET ENERGY ABSORPTION = ITEM 2 / ITEM 7	70.3	46.9	32.0	33.5 11.9

This chart allows for up to five possible fender selections. By filling in the values from Table I, calculations, nomographs and application curves

as noted, a study can be made to determine the best fender for a specific need. (See sample data taken from the 14" shear fender application curves. Shown below.)



After the fender selection chart has been filled out, review and consider such questions as:

- What configuration of fenders suits the design?
- What safety factor should be used?
- How will fender selection affect maintenance?
- Does the design require omnidirectional capability?

Note: See longitudinal force section (shown on this page).

Although 27 units of 48" buckling column would meet the load and energy requirements, 47 units of 16" shear fender would divide the load on the structure into much smaller segments and would induce significantly lower shock as a reaction to high load levels. This illustration considers only part of the variables normally encountered in a design problem. Since a complete analysis of all variables is beyond the scope of this manual, the designer is left to choose the Morse fender best suited to his design requirements.

ALTERNATE METHODS OF DETERMINING TOTAL BERTHING WEIGHT (W_T)

- A. $W_T = W_V + W_C$ (No hydrodynamic effect considered)

$$W_T = \text{Displacement} = 150,000 \text{ lg. tn.}$$

$$= 150,000 \text{ lg. tn.} \left(\frac{2.24 \text{ Kips}}{\text{lg. tn.}} \right) = 336,000 \text{ Kips}$$

- B. $W_T = (W_V + W_C) \left(1 + \frac{2D}{B} \right)$ (Vasco Costa Technique)

$$W_T = \text{Displacement} \left(1 + \frac{2 \times 56}{150} \right)$$

$$= 150,000 \text{ lg. tn.} (1.75) \left(\frac{2.24 \text{ Kips}}{\text{lg. tn.}} \right)$$

$$= 588,000 \text{ Kips}$$

- C. $W_T = W_V + W_C + W_H$

$$= \text{Displacement} + W_H$$

$$= 150,000(2.24) + \frac{\pi}{4}(56)^2(1000)(62.4) \times \frac{1 \text{ Kip}}{1000 \text{ lb.}}$$

$$= 489,691 \text{ Kips}$$

Compare this value with 490,000 Kips obtained from Nomograph 2 (shown on page 6).

Morse does not recommend any one method of calculation of W_T over another.

LONGITUDINAL FORCES ON DOCK FACES

As a vessel slides along a dock face in berthing, it induces longitudinal forces due to friction between the vessel's hull and the dock face. This longitudinal force on the dock can be calculated using the formula:

$$F_L = \mu N$$

Where: F_L = Induced longitudinal force

μ = Coefficient of friction between dock face and vessel hull

N = R minimum

In the sample calculation, if the dock was oak and the vessel was steel,

$\mu = 0.33$ and substitution would yield

$$F_L = R_{\min}$$

$$F_L = .33 (1000 \text{ Kips})$$

$$F_L = 330 \text{ Kips}$$

Assuming this to act at a 45° angle, the load (plus a safety factor) must be taken by chains or other restraints if buckling columns are used or by shear fenders directly without restraints.

Assuming selection of 14" shear fenders, the oblique load deflection curve shows:

$$\frac{330 \text{ Kips}}{59 \text{ Fenders}} = 5.59 \text{ Kips Load/Fender}$$

This load would deflect the dock face 7.5 inches according to the oblique load deflection curve for 14" shear fenders.

Similar evaluation of all fender selections can be made using the appropriate curves.



THE MORSE SHEAR FENDER

Consider how these special features will solve difficult design problems or allow new freedom of design in dock structures.

OMNIDIRECTIONAL

A Shear Fender can stretch in all four shear directions, plus take large compression and limited tension loads. This feature allows for wale movement away from the dock, into the dock, or tangential to the dock as a berthing vessel slides along. In compression, the fender can be used alone or in tandem, bolted between a wall and wale. Tension and compression loading allow the Shear Fender to support the wale, assisting the pile or chain supports. This is truly a unique feature of Shear Fenders.

BUILDING BLOCK FENDER

No other dock system can be tailored to meet the specific requirements that Morse Shear Fenders provide. Shear Fenders can be mounted in varying density, allowing up stream or windward areas of the facility to be stronger than the other sections. Only one size Shear Fender needs to be used. This has a direct bearing on the economy of construction and also reduces future maintenance cost.

DURABILITY

Each Shear Fender is tested before shipment, see photos, to insure long service life. Most cases of failure are due to on-sight mechanical abuse of the rubber shear block, not end plate separation. The durability of the mechanical and chemical bonded end plates have been proven over years of service by hundreds of fenders.

EASE OF SERVICE

A Shear Fender can be replaced by removing eight bolts. No need to interrupt service, because Shear Fenders are building blocks. Removal of one Shear Fender for replacement does not incapacitate the facility. The remaining Shear Fenders carry the

load until the new fender is installed; again, with just eight bolts.

UNIFORM LOAD TRANSFER

Shear Fenders may be placed over the entire face of the dock, from top to bottom, allowing more uniform transfer of berthing loads to the dock structure. This eliminates high load concentrations caused by only a few points of load transfer between the wale and dock structure. An added feature of this type of dispersion of fenders, is the fact that berthing loads are always taken at or near a fender, eliminating overloads due to torque.

The following pages contain dimensional data, mounting recommendations, application data, plotted both in metric and English units, and some typical installation drawings. Should other data be required, contact your nearest Morse Service Center.

SPECIFICATION: SHEAR FENDERS

The Morse Shear Fender shall be an assembly consisting of:

1. A rubber shear block made of ASTM D-2000 NEOLASTIC rubber and meeting the following ASTM test values 5AA425 A₁₃ B₁₃ C₂₀ F₁₇ K₁₁ L₁₄
2. Metal insert plates embedded in and bonded to that block, such plates being completely encased in rubber for corrosion protection.

Design deflection shall be _____ in. or Cm. (See Product Data Curve)

Design Load (Reaction) shall be _____ Kips or Met. Tons (See Product Data Curve)


Design Energy Absorption shall be _____ Ft. Kips or Met. Tn. Mets. (See Product Data)

Maximum Overload Expected to be _____ Kips or Met. Tons


Specifications subject to change without notice. Certified prints provided with quotation on request.

10" SHEAR FENDER • Part No. E46496

U.S. PAT. 3,763,863

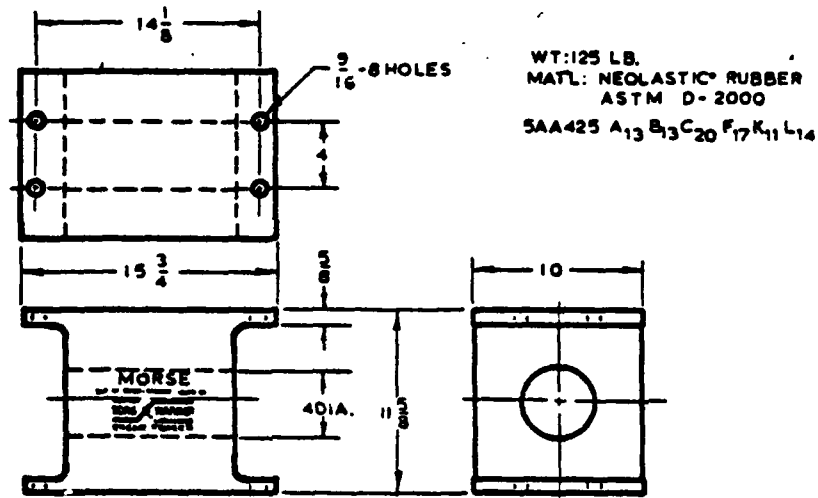


MOUNTING RECOMMENDATIONS

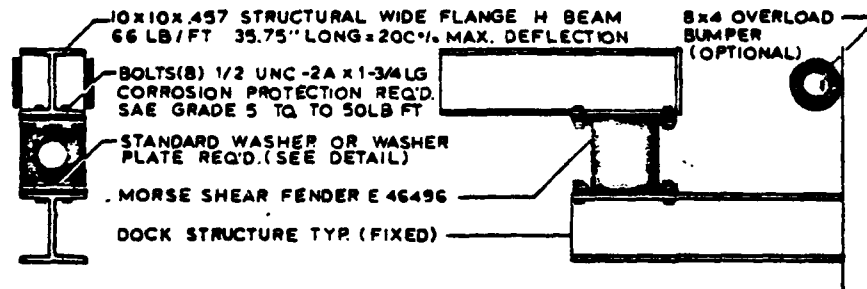


10" SHEAR FENDERS
WILL SUPPORT 2 KIPS
IN COMPRESSION WITH
NO NOTICABLE CHANGE
IN THE SHEAR REACTION

INCH	CM.
9/16	1.43
5/8	1.59
4	10.16
10	25.40
11-5/8	29.53
14-1/8	35.88
15-3/4	40.01




10" SHEAR FENDER

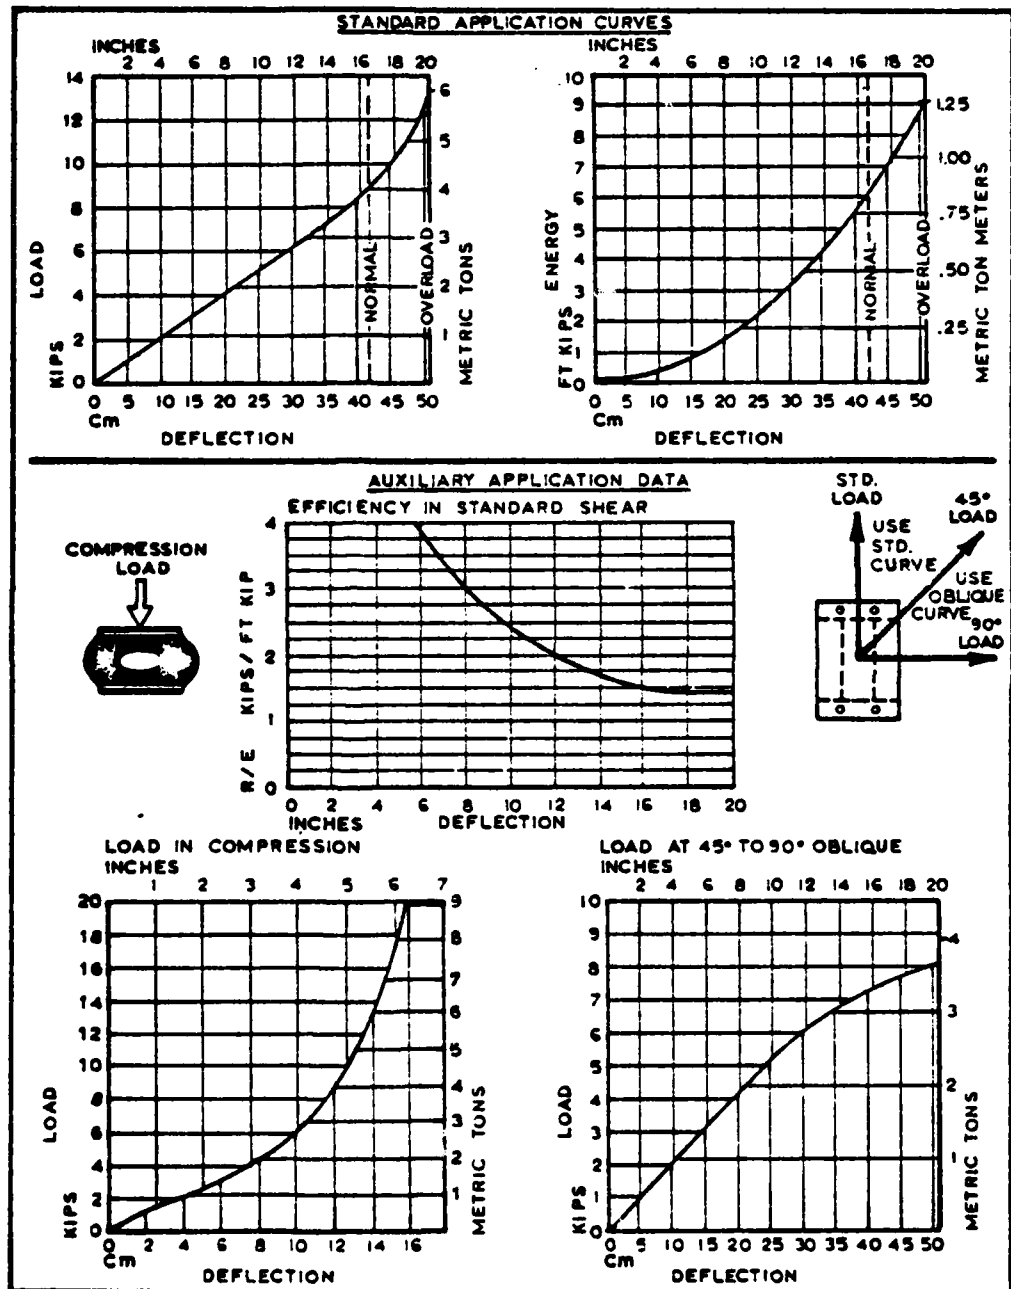


12" SHEAR FENDER • Part No. E46498


U.S. PAT. 3,763,633

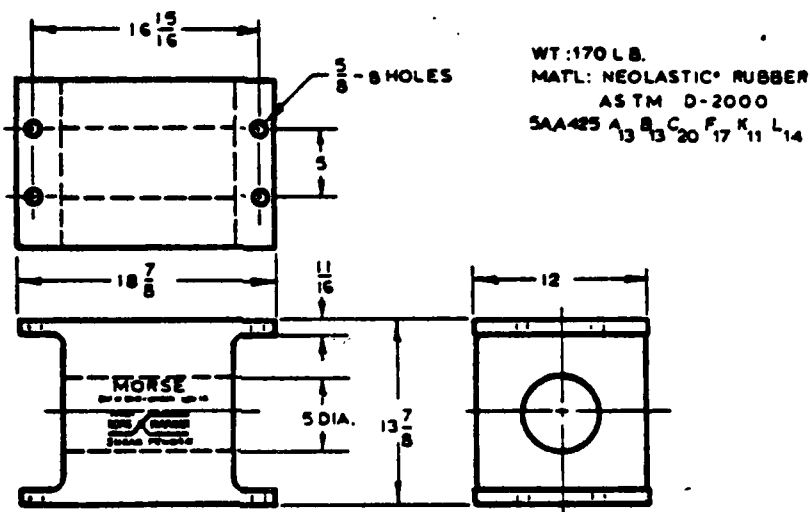

MOUNTING RECOMMENDATIONS

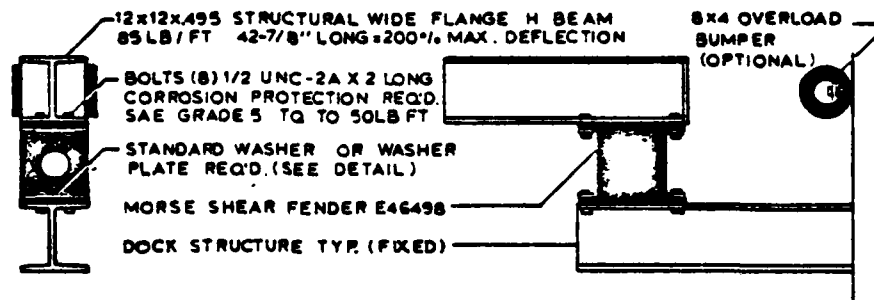


12" SHEAR FENDERS
WILL SUPPORT 3 KIPS
IN COMPRESSION WITH
NO NOTICABLE CHANGE
IN THE SHEAR REACTION




INCH	Cm.
5/8	1.59
11/16	1.75
5	12.70
12	30.48
13-7/8	35.24
16-15/16	43.02
18-7/8	47.94

12" SHEAR FENDER

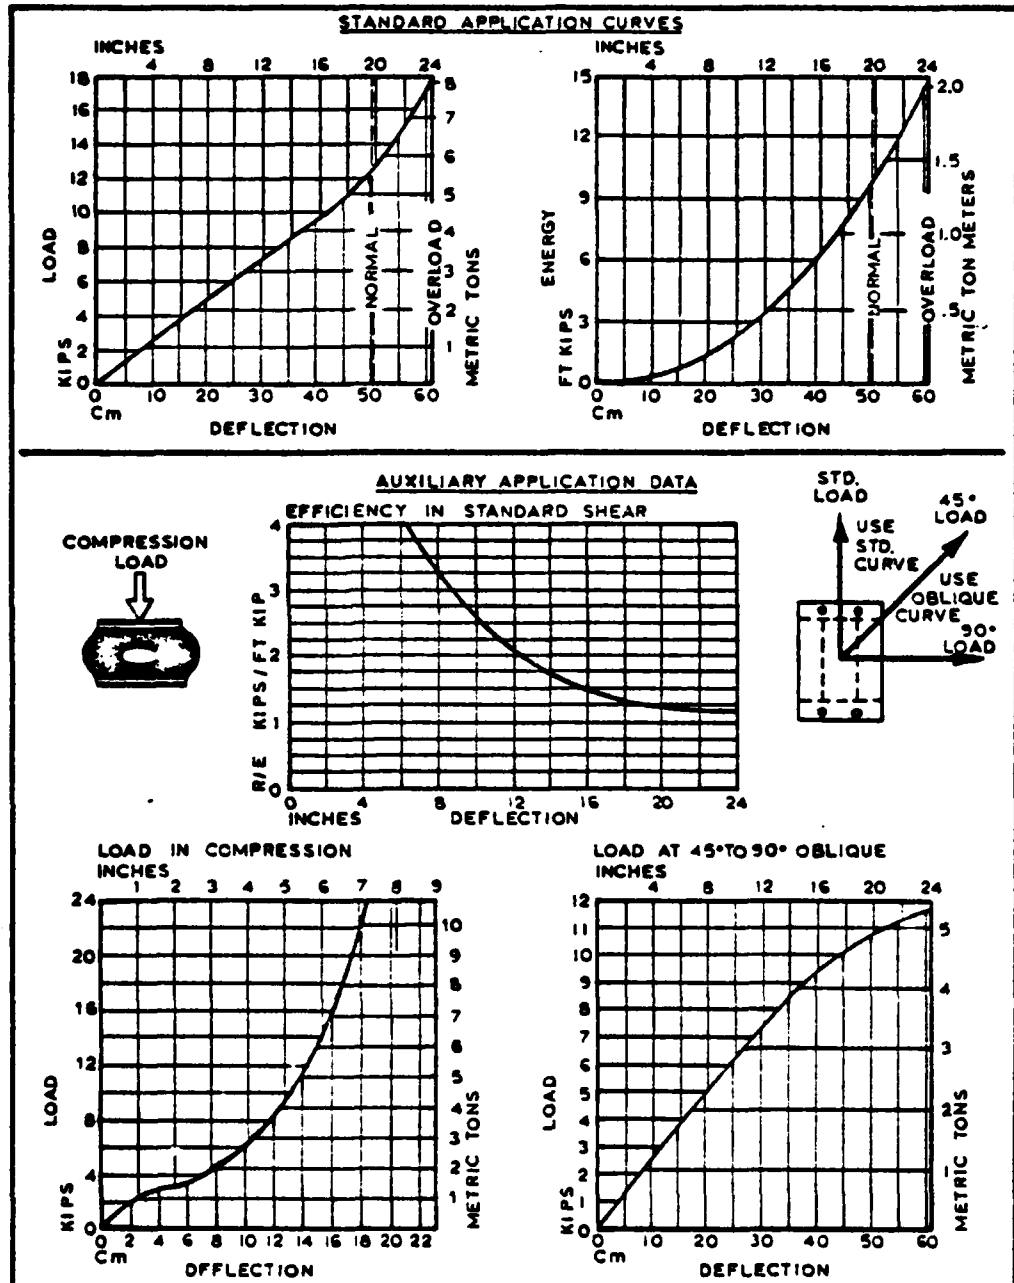


14" SHEAR FENDER • Part No. E46500

U.S. PAT. 3,763,653

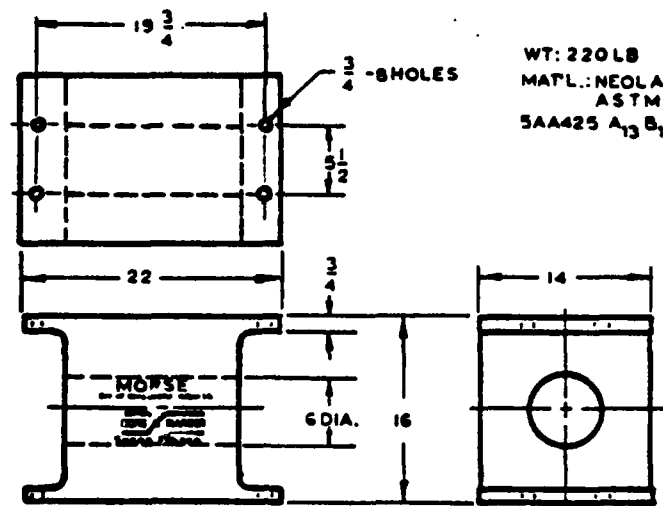


WT: 220 LB
MATL: NEOLASTIC® RUBBER
ASTM D-2000
5AA425 A₁₃ B₁₃ C₂₀ F₁₇ K₁₁ L₁₄

MOUNTING RECOMMENDATIONS

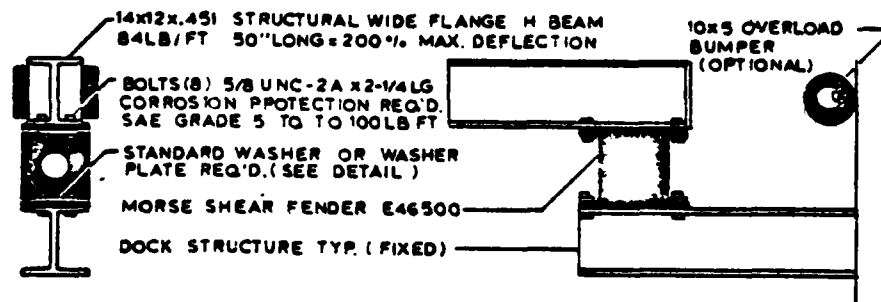


INCH	Cm.
3/4	1.91
5-1/2	13.97
6	15.24
14	35.56
16	40.64
19-3/4	50.17
22	55.88

14" SHEAR FENDERS
WILL SUPPORT 4 KIIPS
IN COMPRESSION WITH
NO NOTICABLE CHANGE
IN THE SHEAR REACTION




14" SHEAR FENDER

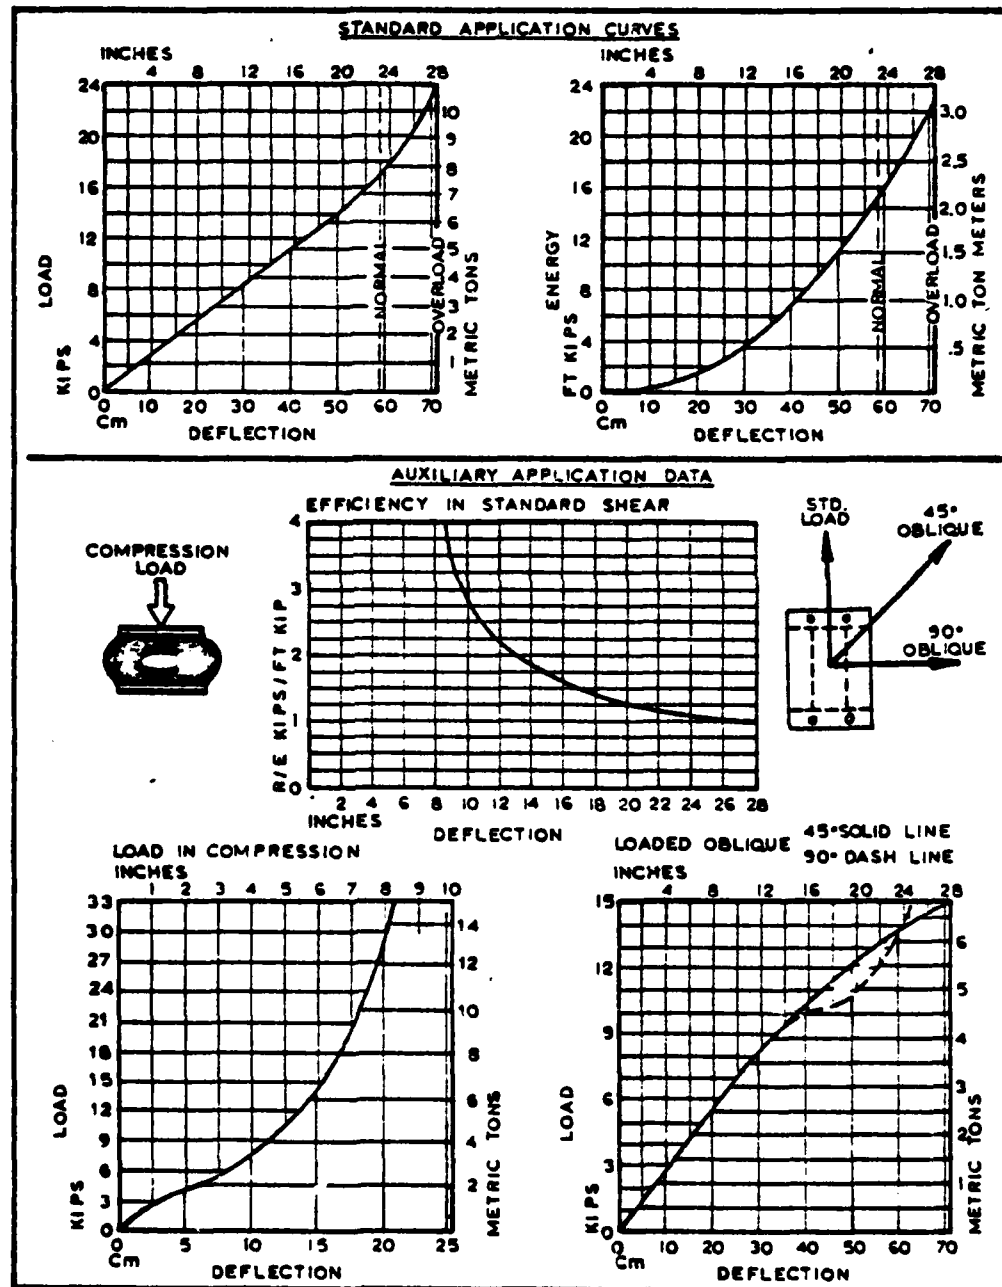


16" SHEAR FENDER • Part No. E46502

U.S. PAT. 3,763,653

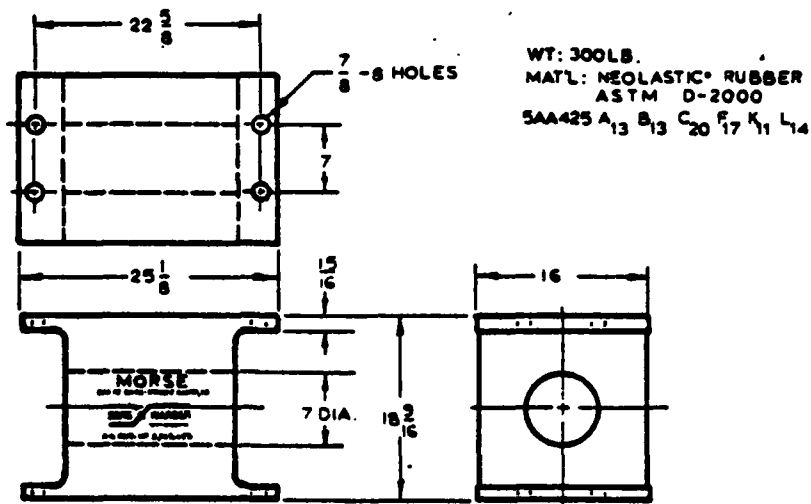


MOUNTING RECOMMENDATIONS

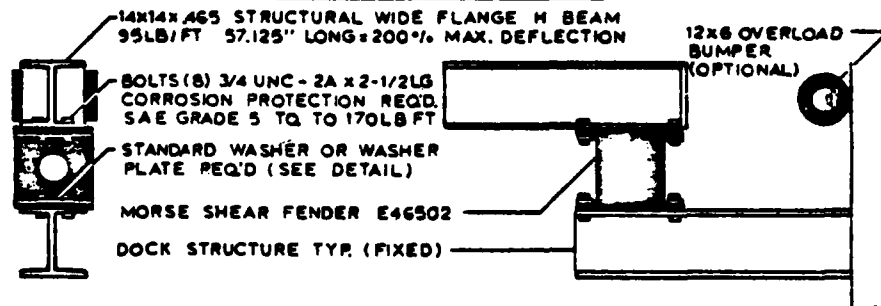



INCH	Cm.
7/8	2.22
15/16	2.38
7	17.78
16	40.64
18-9/16	47.15
22-5/8	57.47
25-1/8	63.82

16" SHEAR FENDERS
WILL SUPPORT SKIPS
IN COMPRESSION WITH
NO NOTICABLE CHANGE
IN THE SHEAR REACTION





16" SHEAR FENDER

STANDARD APPLICATION CURVES

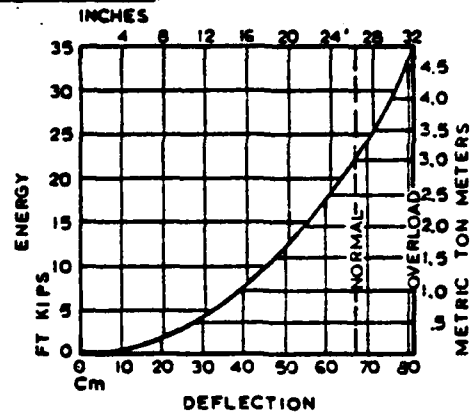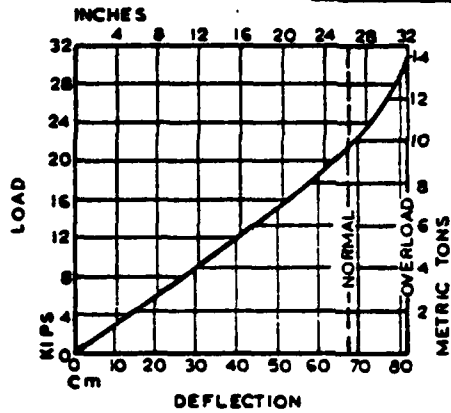


AUXILIARY APPLICATION DATA


EFFICIENCY IN STANDARD SHEAR

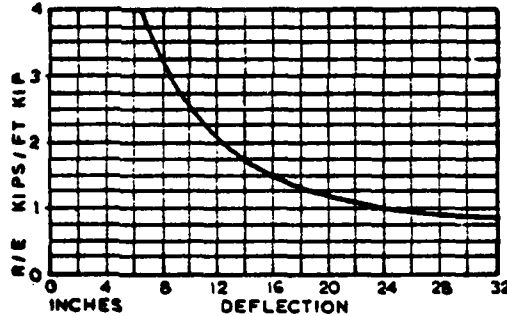

LOAD IN COMPRESSION

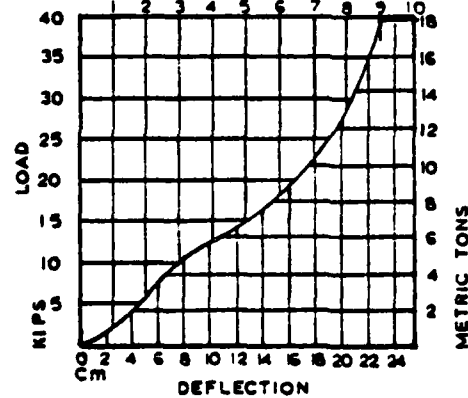


LOADED OBLIQUE

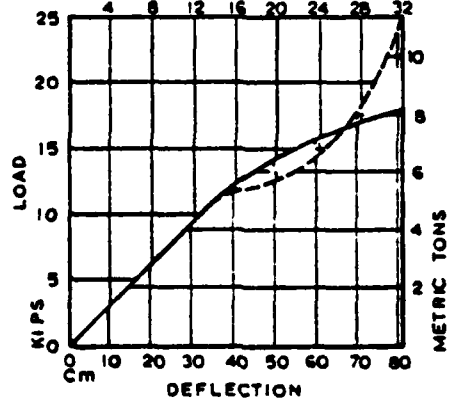


TYPICAL APPLICATIONS

SHEAR FENDERS IN COMPRESSION



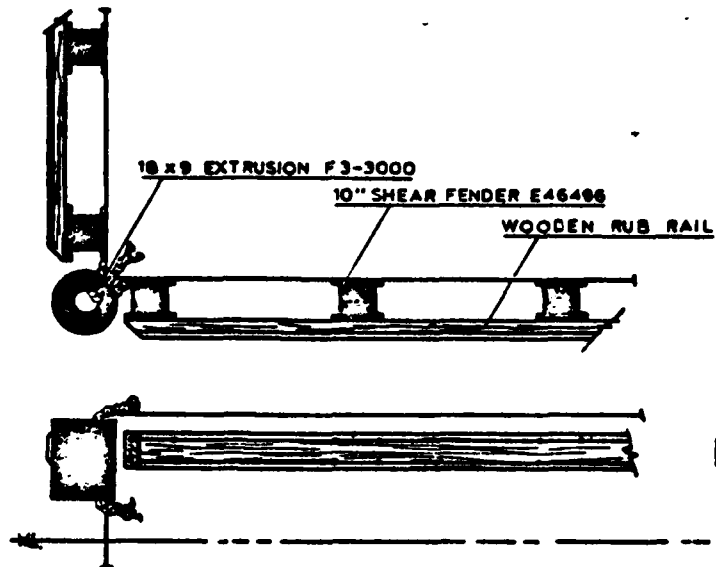


SHEAR FENDERS IN TANDEM IN COMPRESSION

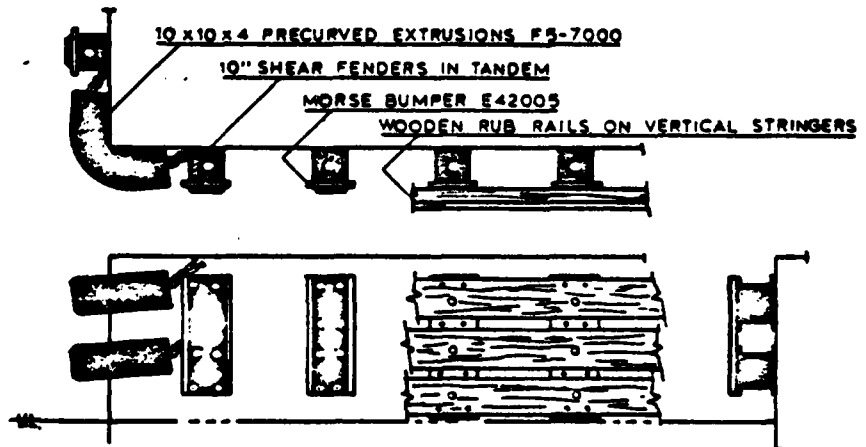


TYPICAL APPLICATIONS

SHEAR FENDERS MOUNTED HORIZONTAL OR VERTICAL

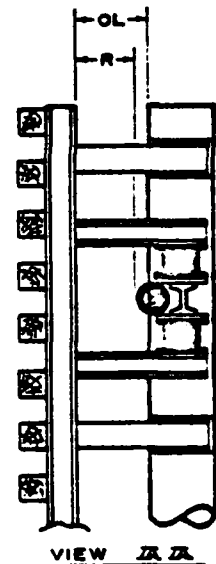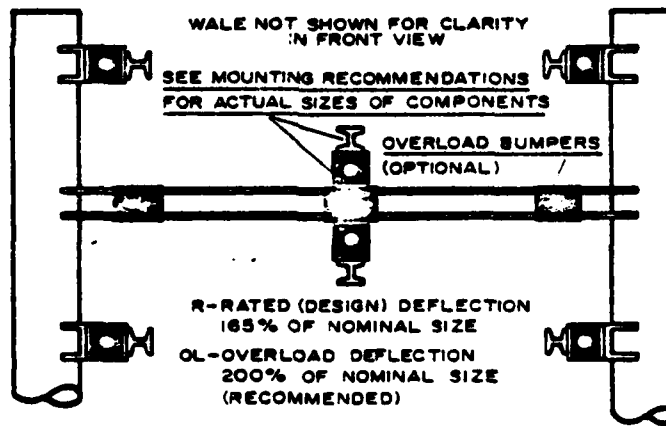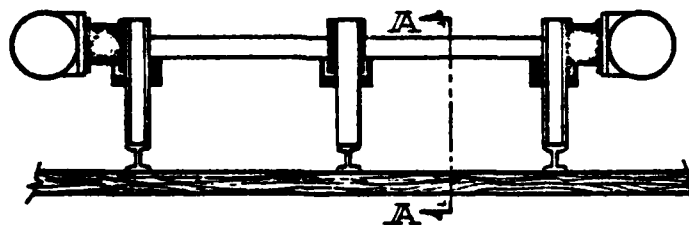


TYPICAL APPLICATIONS


SHEAR FENDERS MOUNTED IN TANDEM

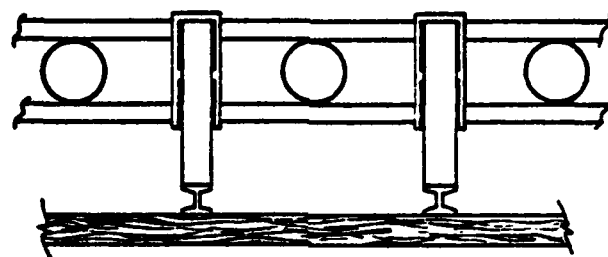


WALE NOT SHOWN IN FRONT VIEW FOR CLARITY

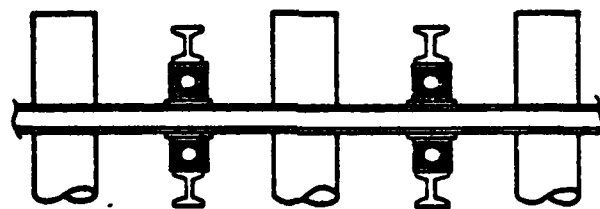

SEE MOUNTING
RECOMMENDATIONS
FOR ACTUAL SIZE OF
COMPONENTS.




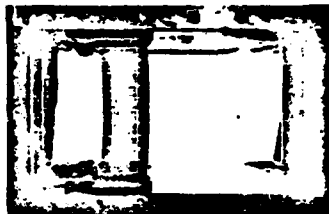


Zero deflection




25% deflection

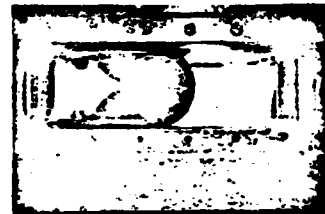

50% deflection



60% deflection

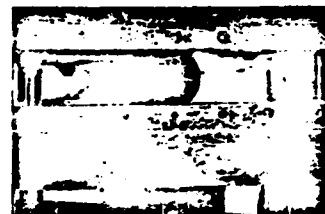

70% deflection

BUCKLING COLUMN FENDERS

GENERAL

The Buckling Column, like the Shear Fender, is an efficient device for absorbing berthing energy (loads) of large vessels while transmitting relatively low reaction loads to the dock structure. The Buckling Column type fender can be installed where the space behind the dock face is limited. Solid walls, where the Column is face mounted and supported by pile or chain is an excellent example of a dock where all the energy must be absorbed between the dock and the wale. For such cases, Buckling Columns are an ideal choice.

Buckling Columns can also be used in combination with other absorbers such as Shear Fenders or Extrusions to take advantage of the features of the various types of systems. When used to its designed maximum capacity, the Buckling Column is extremely efficient, but if overloads occur, transmitted loads increase rapidly after the rated deflection is reached. (See application curves). For this reason, care should be taken in designs where a gross overload could cause major damage to a berthing vessel or the docking facility.

Buckling Columns are designed to buckle in a known direction. This allows Columns to be mounted in pairs or quadrant groupings to meet design requirements. Sometimes it is more feasible to use a pair of smaller Columns in place of a single large Column. A pair of smaller Columns will transmit a lower load at two points of support yet in total will absorb the same energy as a single large Column. Thus, the load may be split while the energy absorbed remains constant.

THE MORSE BUCKLING COLUMN FENDER

- Each Morse Buckling Column Fender is a molded

rectangular rubber column of Neolastic[®] rubber with metal mounting plates embedded in and bonded to the ends, to create an integral unit that is resistant to ozone, sunlight, temperature extremes, marine growth, wear, and abrasion.

- Before shipment from the Morse Plant, each Buckling Column is cycled (see photos) to insure a product free from hidden manufacturing defects.
- Morse Buckling Columns are directly interchangeable with units of other manufacturers in the same size.
- Sizes range from 12" to 48" with efficiency rating (R/E) as low as 0.64.
- All metal is corrosion protected for long service life.

SPECIFICATION: BUCKLING COLUMN

The Morse Buckling Column Fender, Part No. (See Product Dimension Sheet), shall be an assembly consisting of:

1. A rubber rectangular column made of ASTM D-2000 NEOLASTIC rubber and meeting the following ASTM test values 3AA725, B3, C3, F17, K11, L14
2. Metal insert plates embedded in and bonded to that column, such plates being completely encased in rubber for corrosion protection.


Design Load (Reaction) shall be _____ Kips or Met. Tons (See Prod. Data Curve)

Designed Energy Absorption shall be _____ Ft. Kips or Met. In Mets. (See Product Data Curve)


Designed Deflection shall be _____ Inches or Cm. to a maximum of _____ Inches or Cm

Specifications subject to change without notice. Certified prints provided with quotations on request.

12" BUCKLING COLUMN • Part Nos. E46003 & E46005

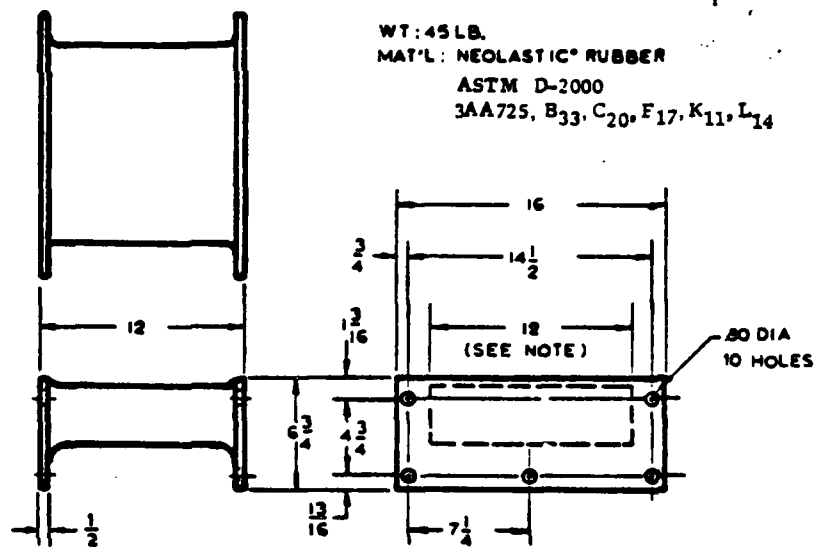


MOUNTING RECOMMENDATIONS

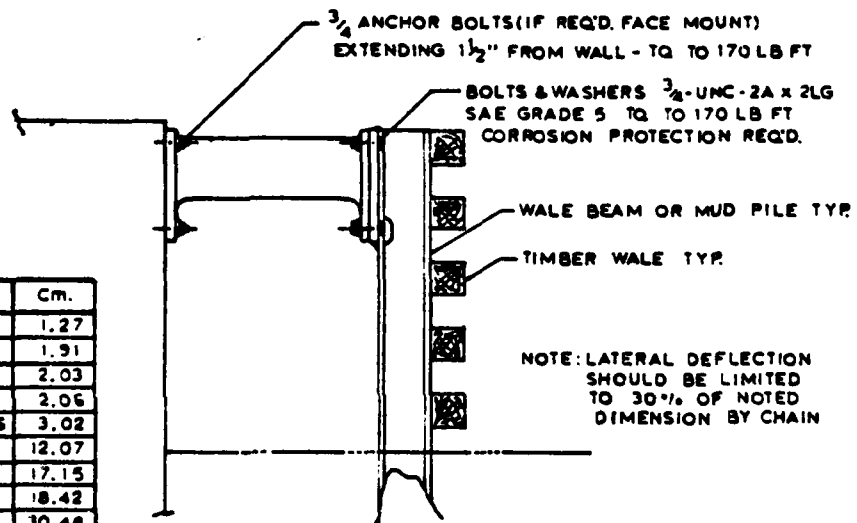


INCH	Cm.
1/2	1.27
3/4	1.91
.80	2.03
13/16	2.06
1-3/16	3.02
4-3/4	12.07
6-3/4	17.15
7-1/4	18.42
12	30.48
14-1/2	36.83
16	40.64

12" BUCKLING COLUMN APPLICATION CURVES

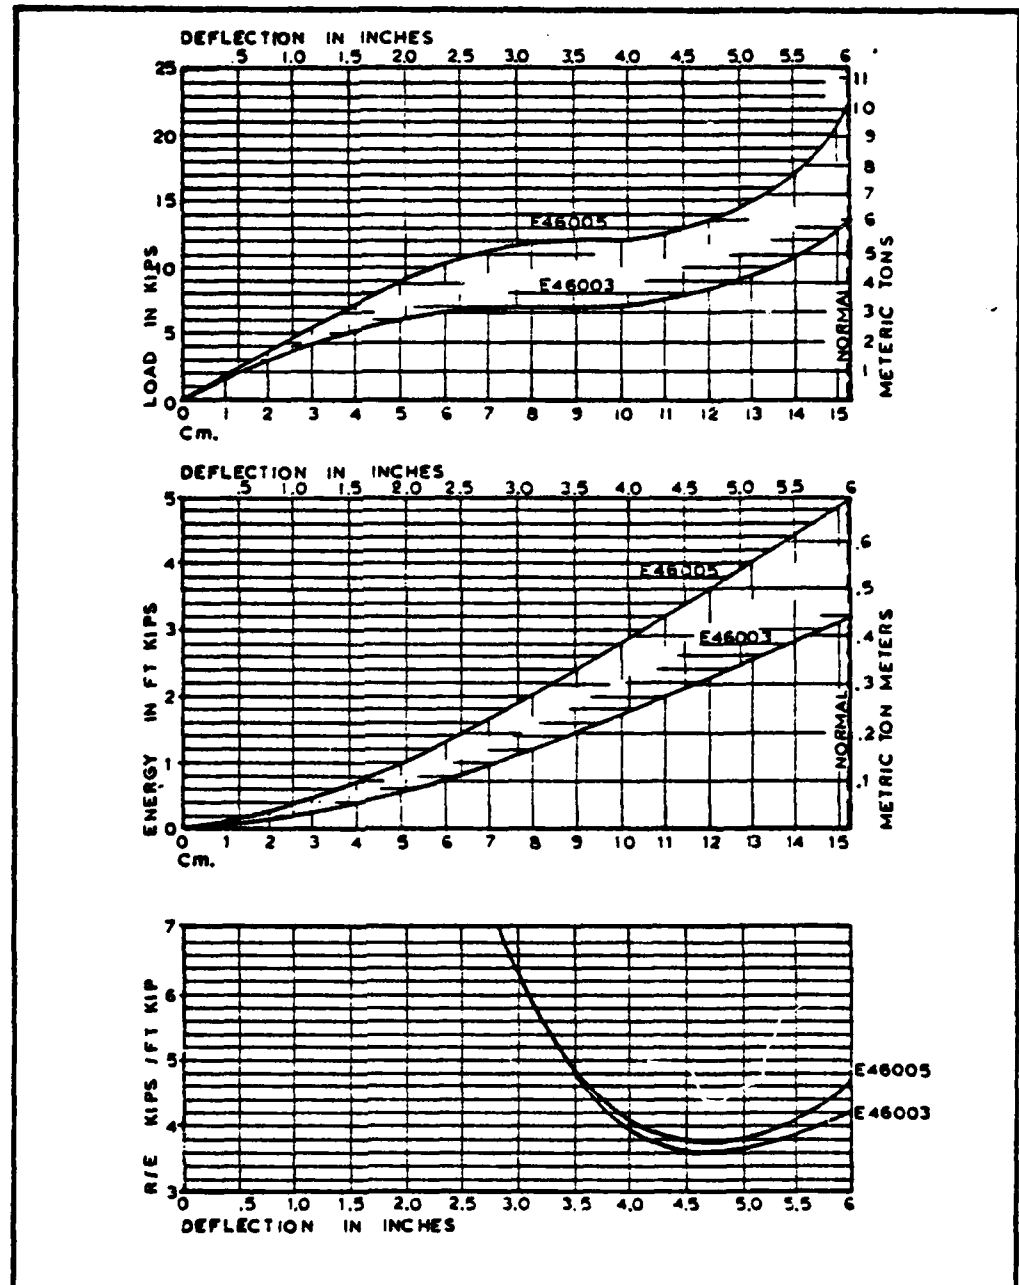


MAT'L: NEOLASTIC® RUBBER
ASTM D-2000
3AA725, B33, C20, F17, K11, L14

PART N°	WT.	A	B	C	D
E 46006	89LB	10	16 $\frac{5}{16}$	11 $\frac{9}{32}$	4 $\frac{3}{8}$
E 46010	212LB	28	32 $\frac{5}{16}$	15 $\frac{9}{16}$	9 $\frac{11}{16}$

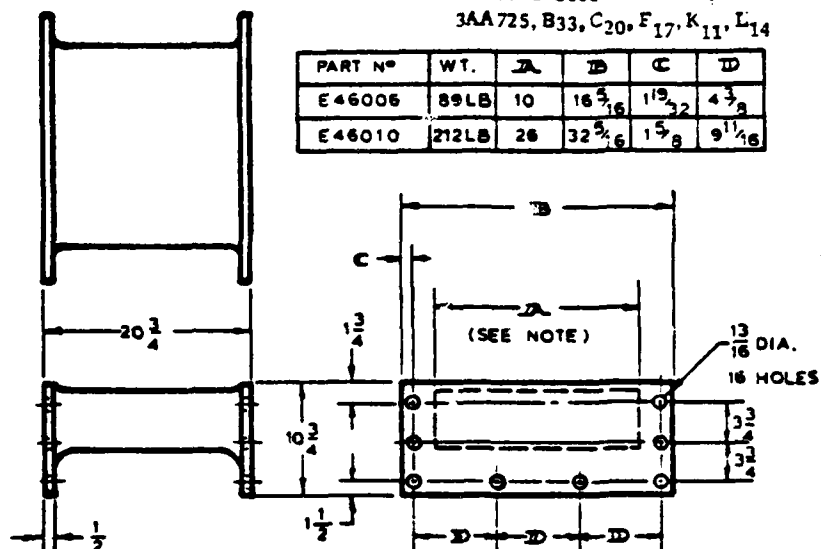

MOUNTING RECOMMENDATIONS

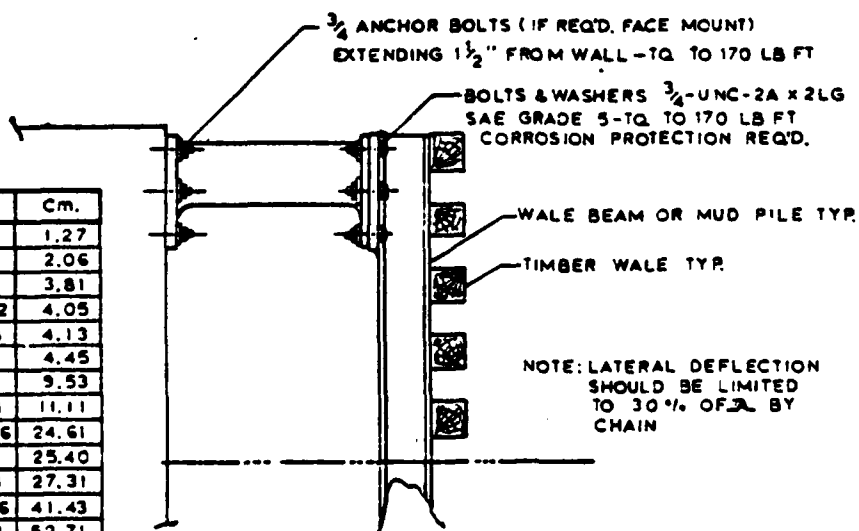

INCH	Cm.
1/2	1.27
3/16	2.06
1-1/2	3.81
1-9/32	4.05
1-5/8	4.13
1-3/4	4.45
3-3/4	9.53
4-3/8	11.11
9-11/16	24.61
10	25.40
10-3/4	27.31
16-5/16	41.43
20-3/4	52.71
26	66.04
32-5/16	82.07

NOTE: LATERAL DEFLECTION
SHOULD BE LIMITED
TO 30% OF Δ BY
CHAIN

AD-A124 597

SYNTHESIS OF A COLLISION TOLERANT FIXED NAVIGATION
MARKER SYSTEM(U) NAVAL POSTGRADUATE SCHOOL MONTEREY CA
M R MILLER OCT 82

2/2

UNCLASSIFIED


F/G 13/10 NL

NL

END


FILMED

BTIC




MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A


20" BUCKLING COLUMN APPLICATION CURVES

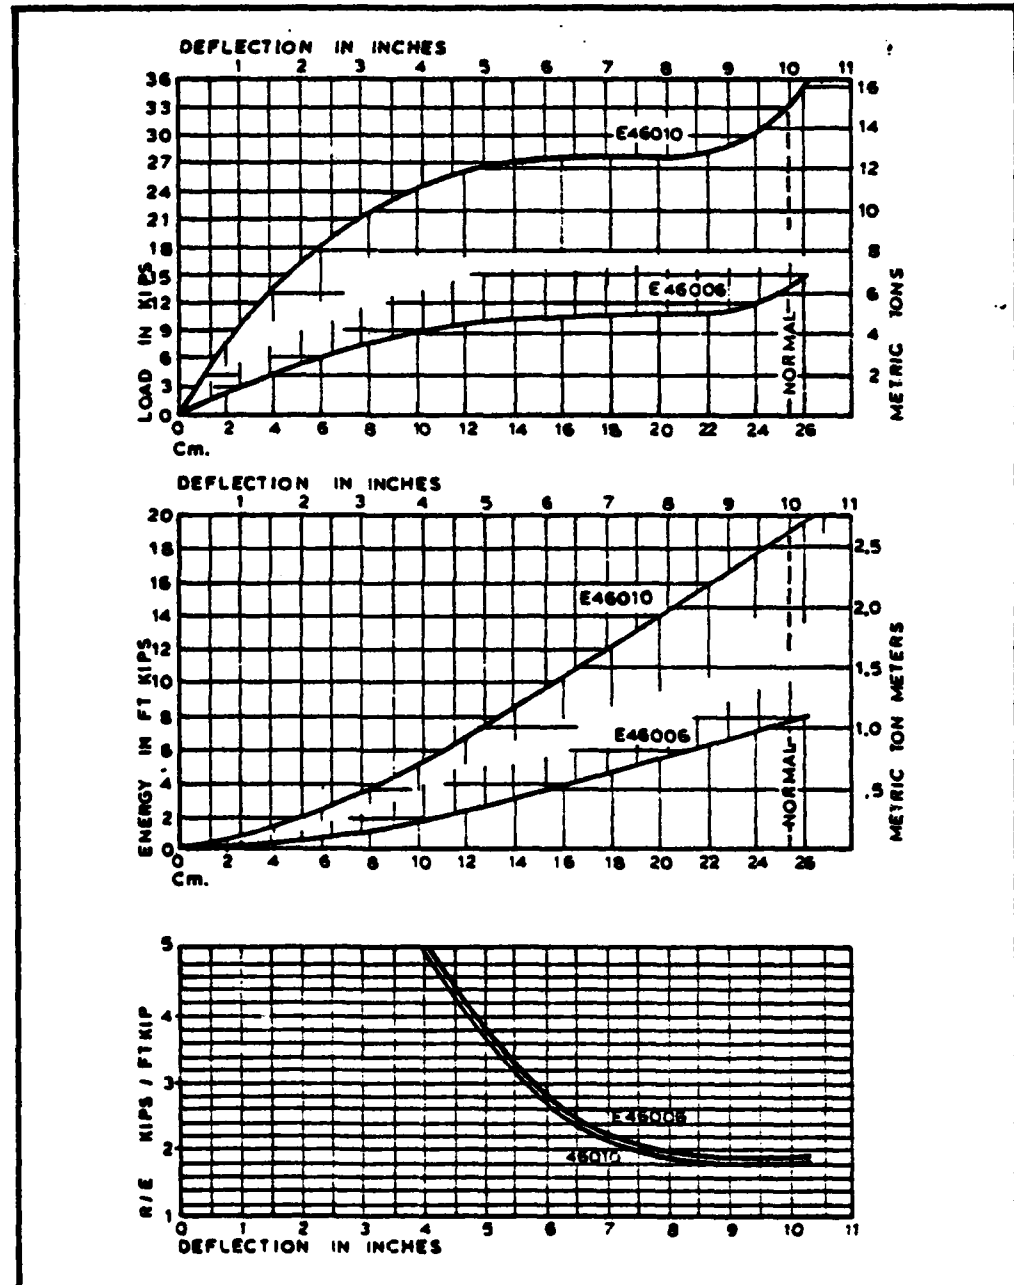


33" BUCKLING COLUMN • Part No. E46011

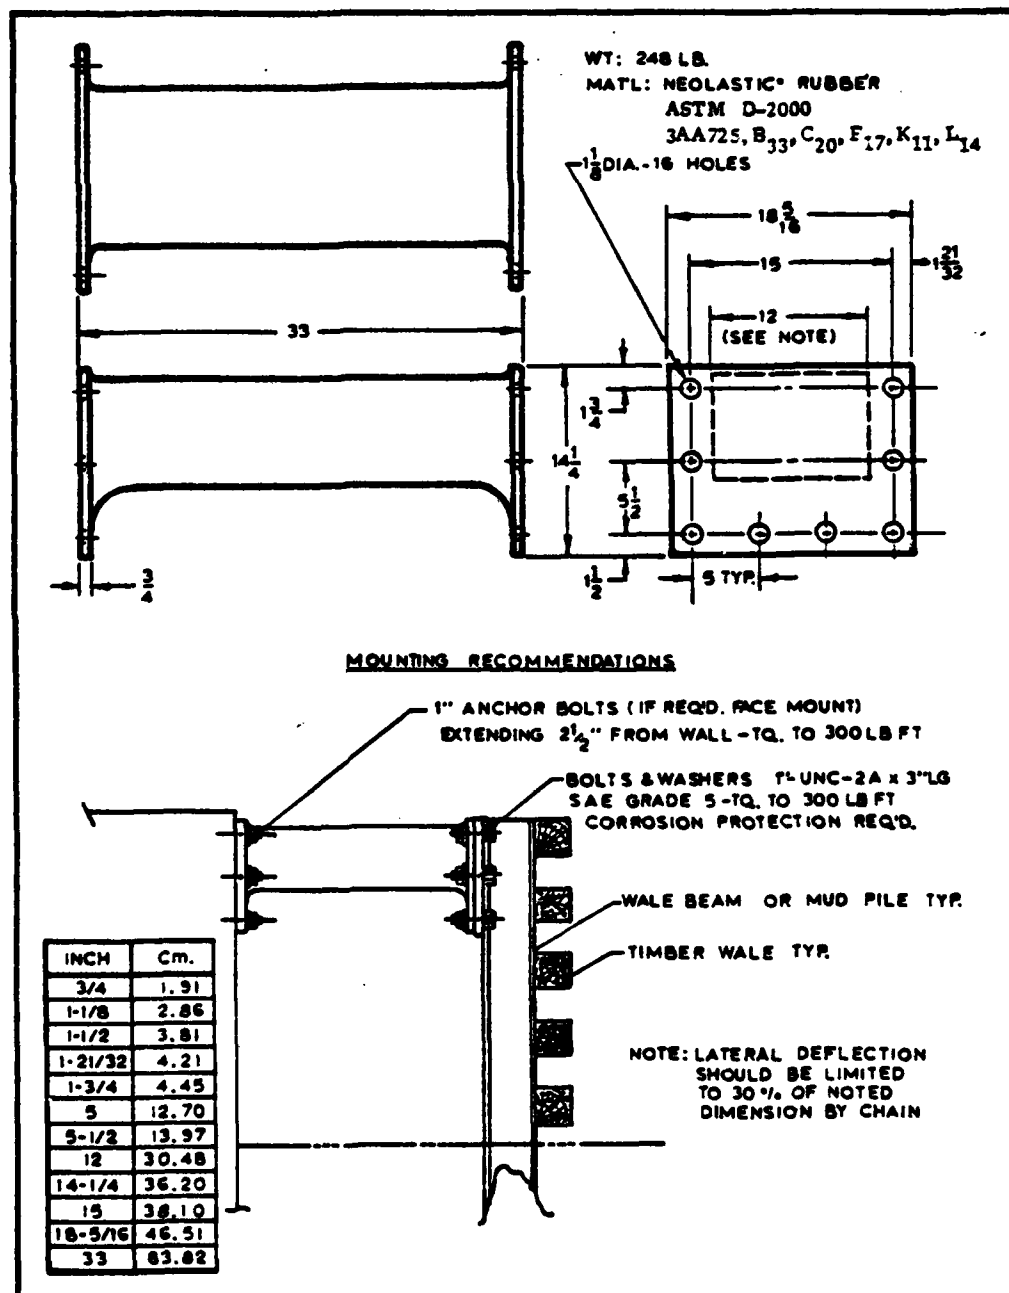




0

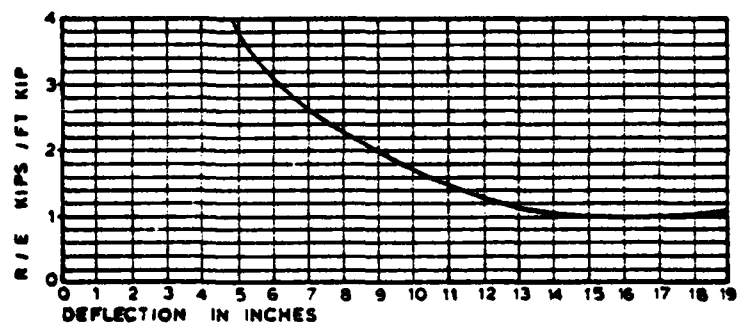


48" BUCKLING COLUMN • Part No. E46018

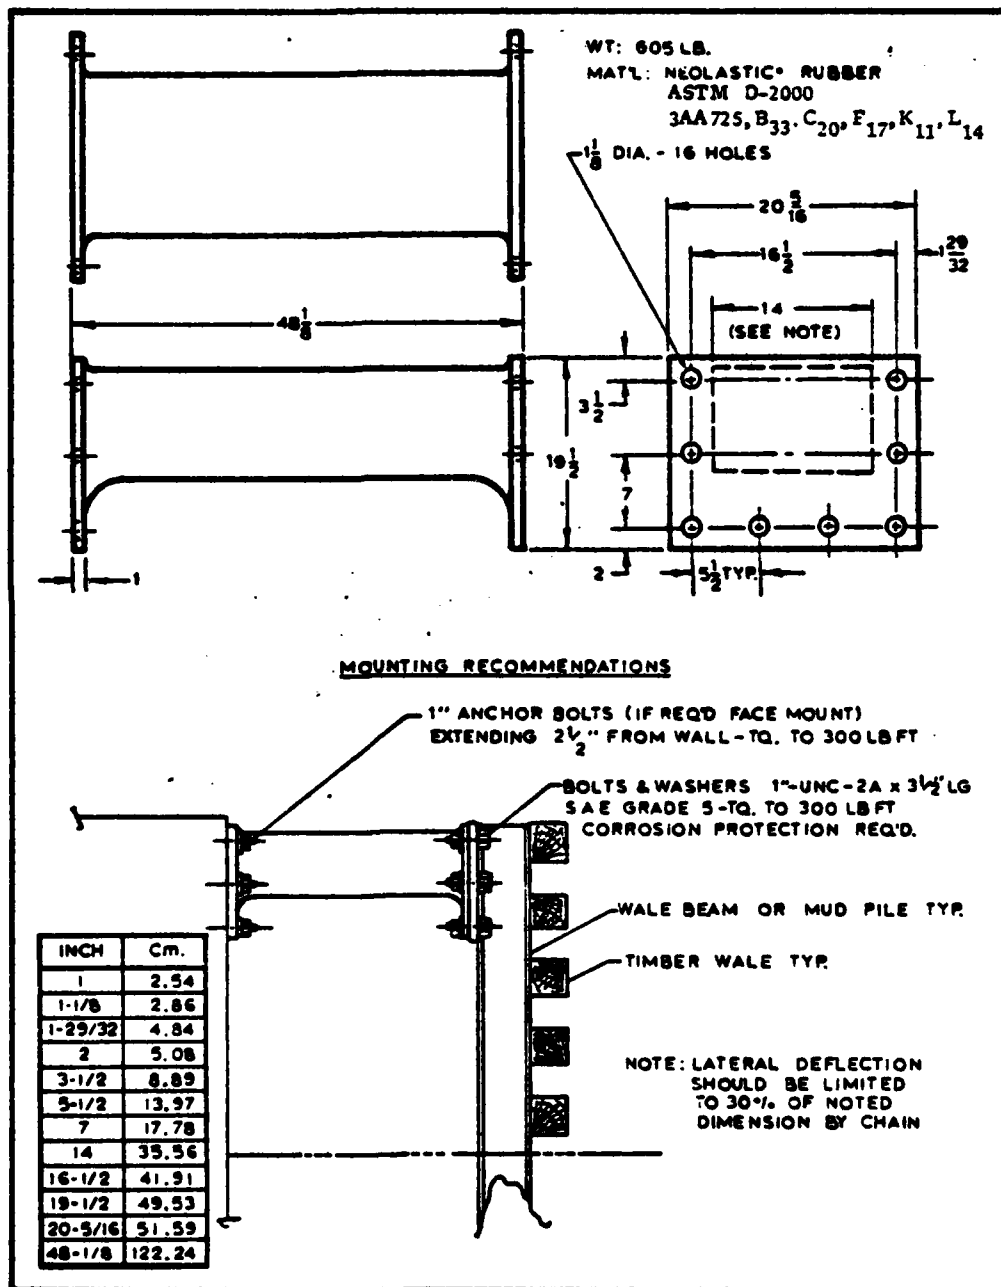


48" BUCKLING COLUMN APPLICATION CURVES

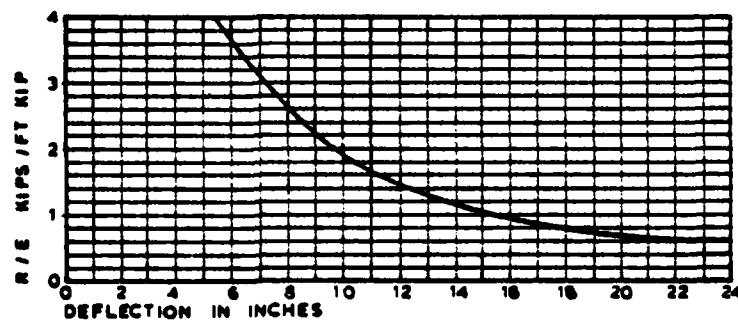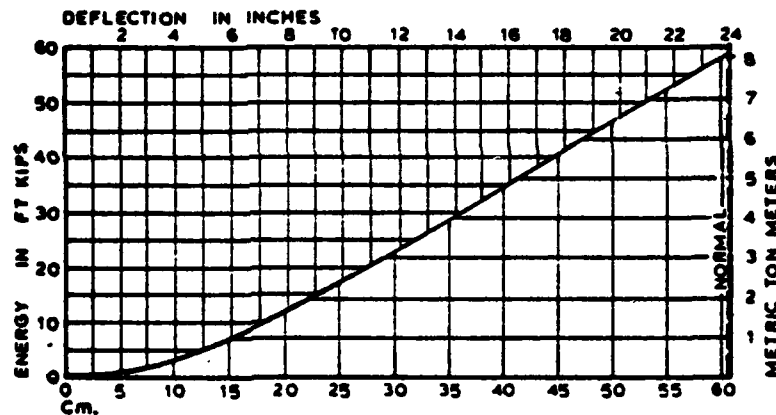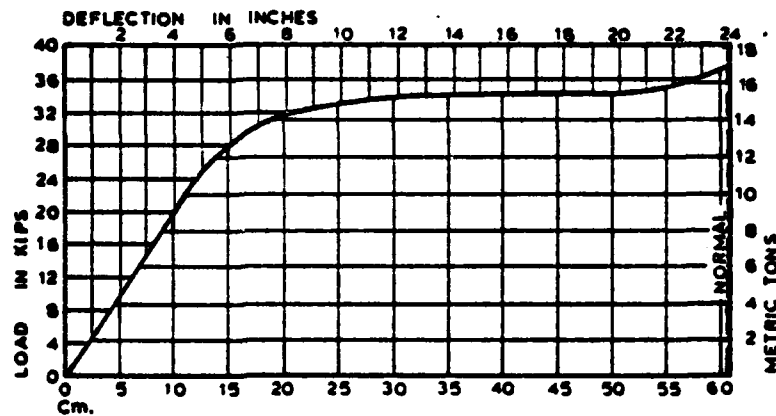

TYPICAL APPLICATIONS

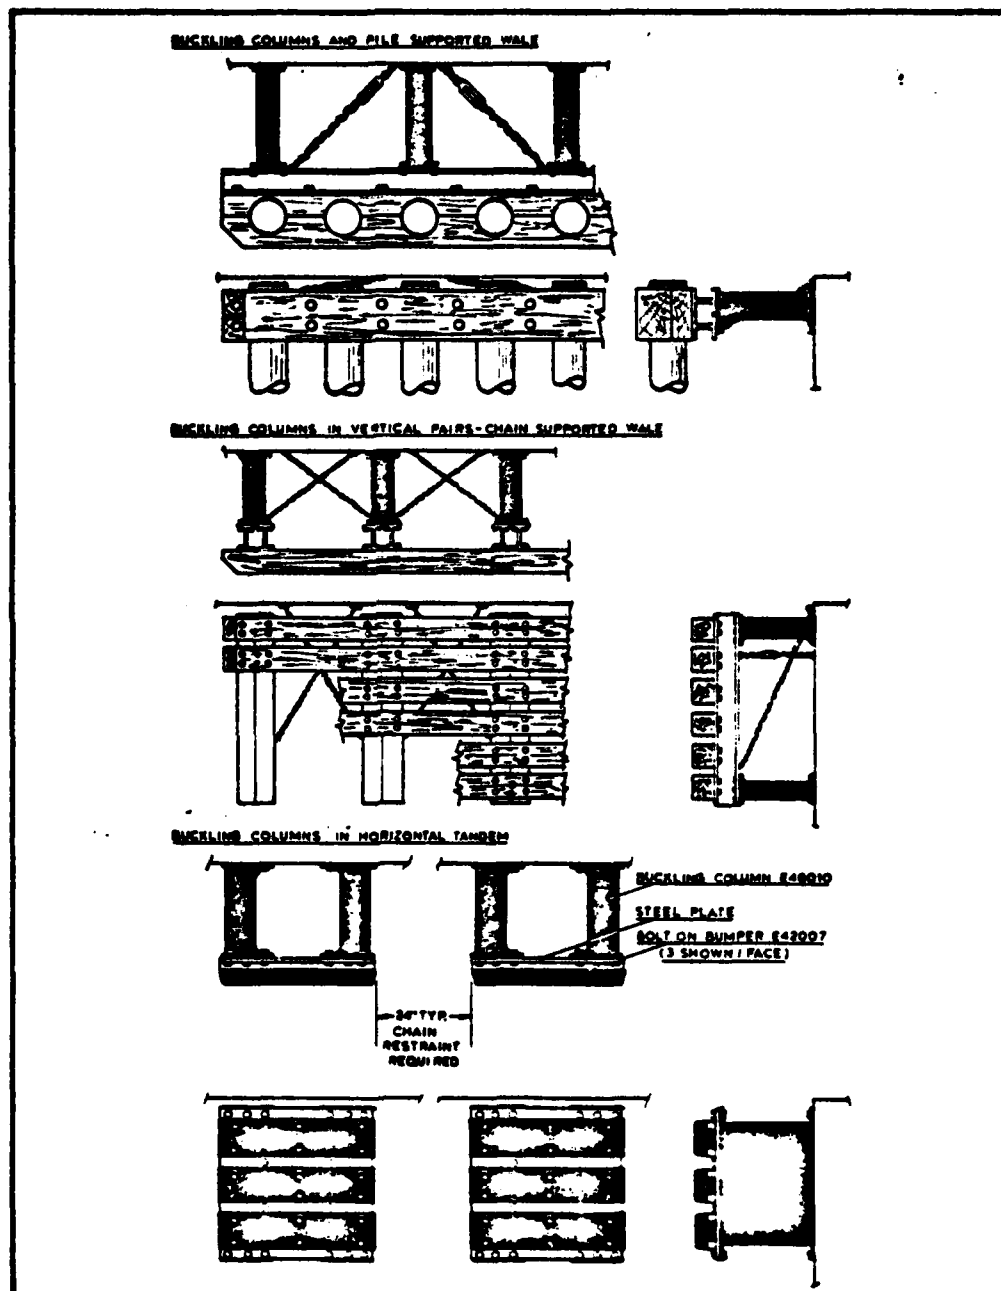

MORE FOR SHIP AND SHORE

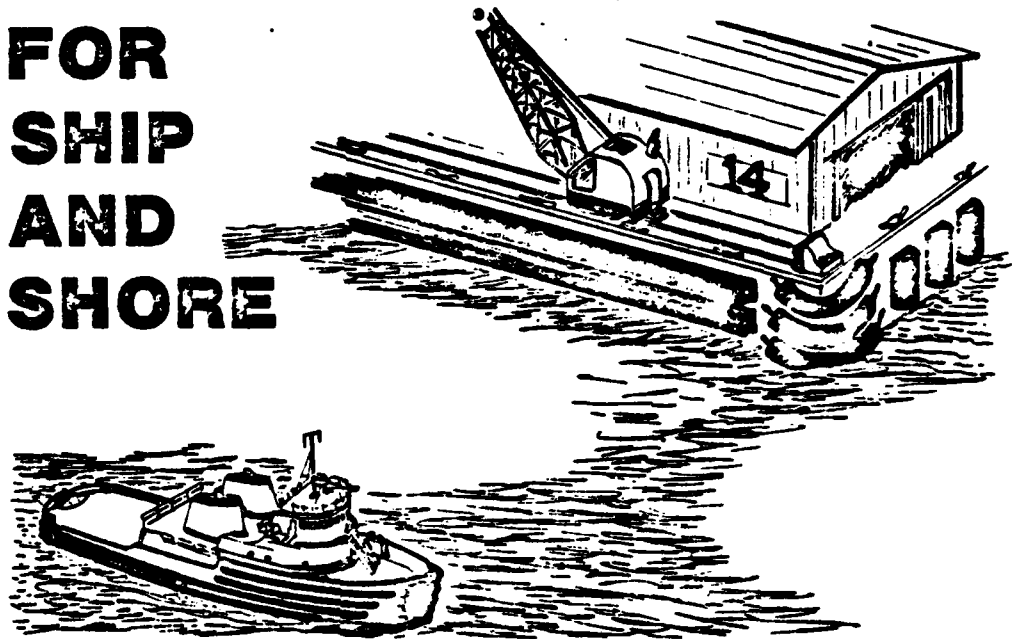

EXTRUDED FENDERS

Extruded fenders are one of the most widely used forms of fender protection and come in a wide range of sizes and shapes. Although relatively inefficient when compared to other fender types, Extruded Fenders are the logical choice where structures are rigid, where the relative motion between rubbing surface and fender is lateral, or where vessel size is small and the energy levels are low.

For this reason Extruded Fenders are found in both dock applications and as bumpers for tugs, barges, work boats and larger pleasure craft. Extruded fenders perform their protective function by acting as a soft interface between a vessel and dock or between two vessels.

Extruded fenders may be bolted, hung on chain, or clamped to flat dock walls or hulls.

Extruded fenders can be precurved during fabrication to fit special shape requirements or attachment methods.

Mounting holes can be drilled on factory order or can be drilled on site with a standard ($\frac{1}{8}$ " oversize) twist drill at 250 rpm. The drill should be sharp-

ened to 120° included angle and lubricated with water or green soap.

Standard extruded fender tolerances are +4% on outside dimensions, +8% on inside dimensions, + $\frac{1}{4}$ " on lengths up to 5 feet, and +1% on longer sections up to 20 feet maximum.

The standard material for extruded fenders is Neolastic-9 rubber with a durometer of 70 + 5, however, special stocks can be provided. Consult Morse Service Center for availability.

Neolastic-9 rubber compound for extruded fenders is resistant to oil, sunlight, ozone, temperature extremes, abrasion, and wear. It meets the following specifications MIL-R-3085-B, R.S. 720-ABD and F, ASTM D-2000-70B, and SAE designation J-2000.

Extruded shapes listed in this manual are considered standard shapes. Variations from the standard shapes can be provided. Contact Morse Service Center.

Extruded fenders, while primarily a marine product, have found many applications in industry such as truck dock bumpers, door bumpers, corner protection, rub strips, and seals.

STANDARD SHAPES

REF. PAGE	A	B	C	D	E	F	WT. IN LB./FT.	PART NUMBER	REMARKS SEE NOTE	1
1	3 3/4	2 1/4	4 1/2	1 1/2	1 3/4	3 3/4	4.2	F1-4000	c	
2	3	1 1/2					3.0	F3-0000	a	
2	5	2 1/2					7.0	F3-8000	a	
2	6	2					13.0	F3-9000	b	
2	8	4					18.5	F3-1000	a	
2	10	5					30.0	F3-2000	a	
2	12	6					42.5	F3-5000	a	
2	15	7 1/2					68.5	F3-6000	a	
2	18	9					97.5	F3-3000	a	
3	4 1/2	2					8.4	F6-0000	Square Bore b	
3	8	3					29.5	F5-0000	a	
3	10	4					45.0	F5-7000	a	
3	12	5					63.0	F5-1000	a	
3	14	6					81.0	F5-2000	a	
3	14	6 1/2					84.3	F5-3000	b	
3	6	2 1/2					15.9	F6-2000	b	
3	7	3					21.4	F5-6000	b	
4	2	-	4	-			4.6	F6-5000	* Solid c	
4	6	1 3/4	10	3			30.0	F5-4000	b	
4	8	3	10	5			36.0	F5-5000	a	
4	10	4	12	6			59.0	F5-8000	a	
4	2	-	12	-			10.9	F6-7000	* Solid c	
5	3	1	6	3/4	1 1/2	1 1/2	4.3	F7-0000	a	
5	6	3	9	1 1/2	3	3	15.5	F7-1000	a	
5	12	6	18	3	6	6	58.5	F7-3000	a	
5	12	6	16	3	6	6	54.0	F7-4000	b	
5	10	4	16	2 1/2	5	5	48.0	F7-5000	b	
6	12	6	18	3	7	12	64.0	F7-2000	a	
7	6	2 1/2	5		3	3	11.5	F9-2000	"O" Bore a	
7	8	3	8		4	4	22.0	F9-5000	"	
7	12	5	12		6	6	54.0	F9-3000	"	
7	8	4	8	4	4	4	22.0	F9-0000	"D" Bore a	
7	12	6	12	6	6	6	52.0	F9-7000	"	
8	3 1/4	2 1/4	4 1/2	1 1/4	2	1 1/2	4.5	F9-4000	a	
8	6	3	6 1/2	1 1/4	2 1/4	2 1/4	12.3	F9-1000	a	
9	8	6	4	1	1		11.5	G1-9000	c	

NOTE:


- STANDARD SECTION-CURVES FOR R, E, & R/E INCLUDED Pgs.
- NON-STANDARD SECTION-CURVES FOR R, E, & R/E UPON REQ.
- RUB STRIP-NO CURVES

CYLINDRICAL EXTRUSION



APPROXIMATE LOAD/ENERGY, DEFLECTION CURVES FOR MORSE STANDARD CYLINDRICALS

PART N°	O. D.	I. D.	WT/FT	R/E
F3-0000	3	1.5	3	14
F3-8000	5	2.5	7	10
F3-1000	8	4	18.5	10
F3-2000	10	5	30	6.2
F3-5000	12	6	42.5	5.3
F3-6000	15	7.5	68.5	3.5
F3-3000	18	9	97.5	2.9
UNITS	INCHES		lbs	KIP/FT R/P

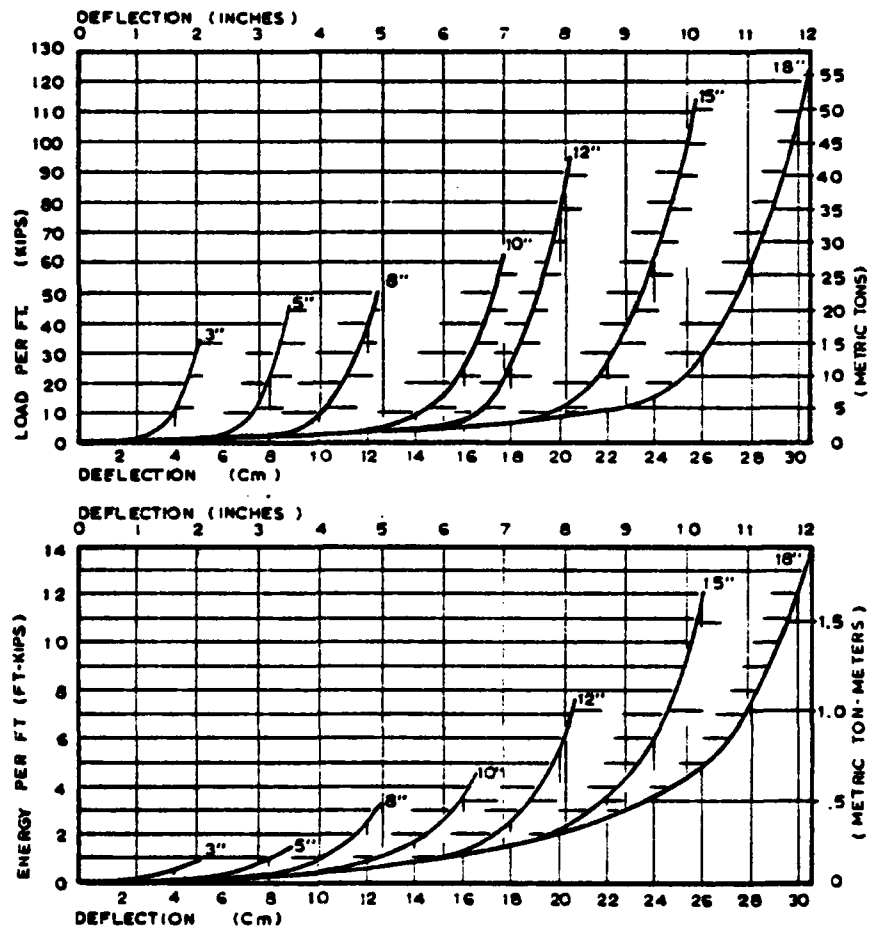



SQUARE EXTRUSION




SQUARE SECTION

PART N°	A	BORE	Wt/FL	R/E
P5 - 0000	8	3	29.5	10
P5 - 7000	10	4	45	8.5
P5 - 1000	12	5	63	7
P5 - 2000	14	6	81	3.7
UNITS	INCHES	lbs	KG/FTMP	

APPROXIMATE LOAD/ENERGY, DEFLECTION CURVES FOR MORSE STANDARD SQUARE SHAPE

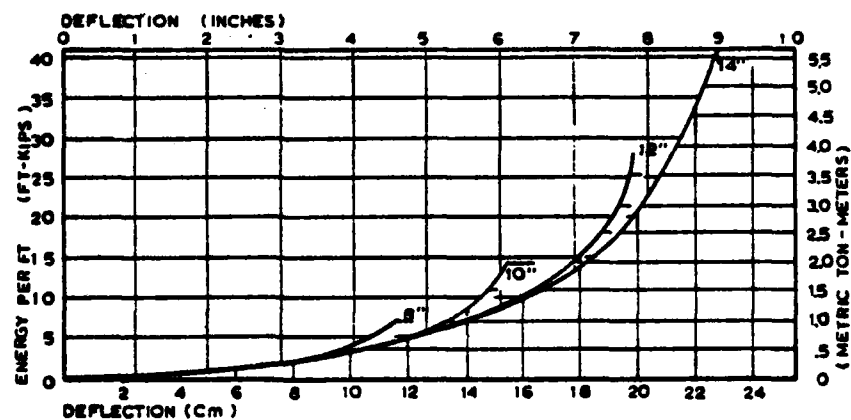
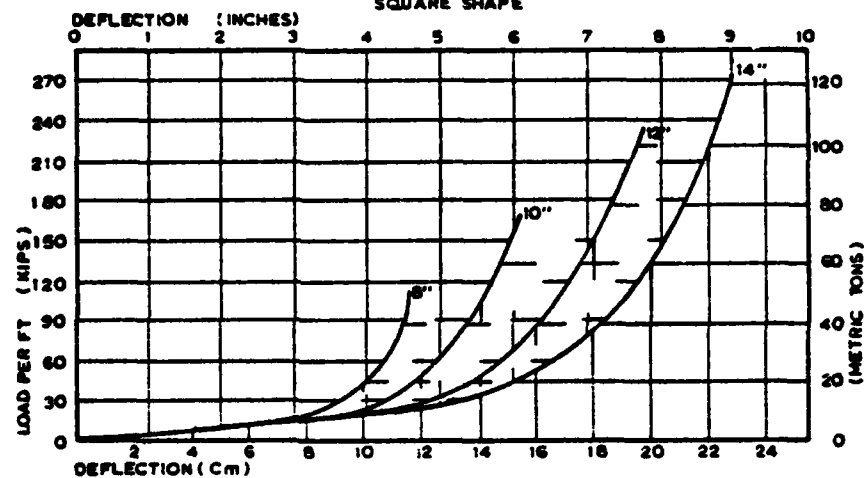


RECTANGULAR EXTRUSION



PART N°	A	BORE	C	D	Wt./Ft	R/E
F5-5000	8	3	10	5	36	8.3
F5-8000	10	4	12	6	59	7.4
UNITS	INCHES				lbs	KIP/FT KIP

APPROXIMATE LOAD/ENERGY, DEFLECTION CURVES FOR MORSE STANDARD RECTANGULAR SHAPE

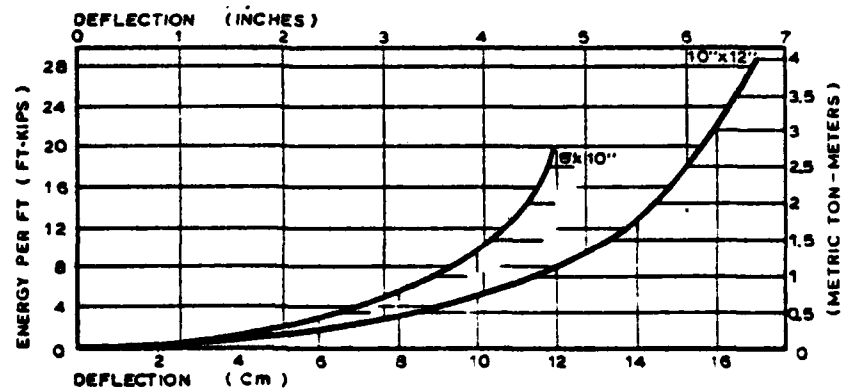
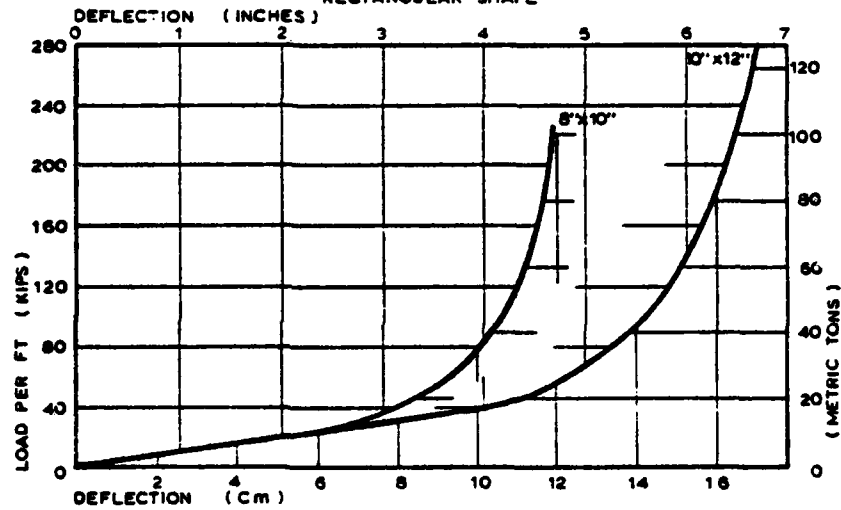


CYLINDRICAL WING EXTRUSION




PART N°	A	BORE	C	D	E	Wt / Ft	R/E
F7-0000	3	1	6	.75	1.5	4.3	25
F7-1000	6	3	9	1.5	3	15.5	13.5
F7-3000	12	6	18	3	6	58.5	6.3
UNITS	INCHES					lbs	MMPTW

APPROXIMATE LOAD/ ENERGY, DEFLECTION CURVES FOR MORSE STANDARD CYLINDRICAL WING

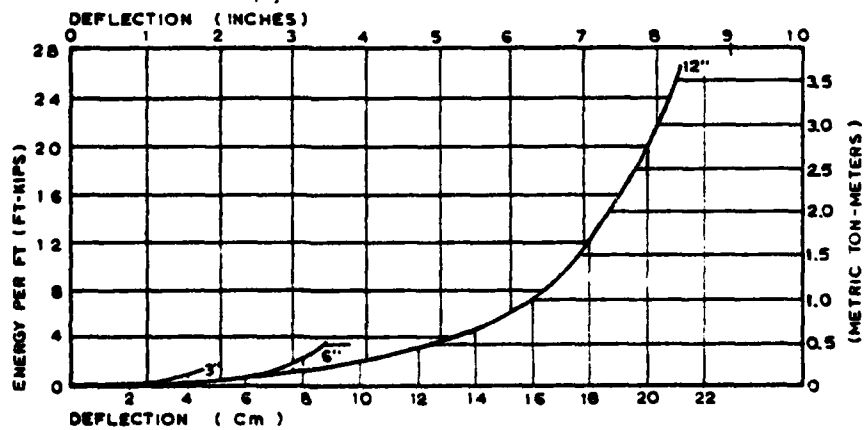
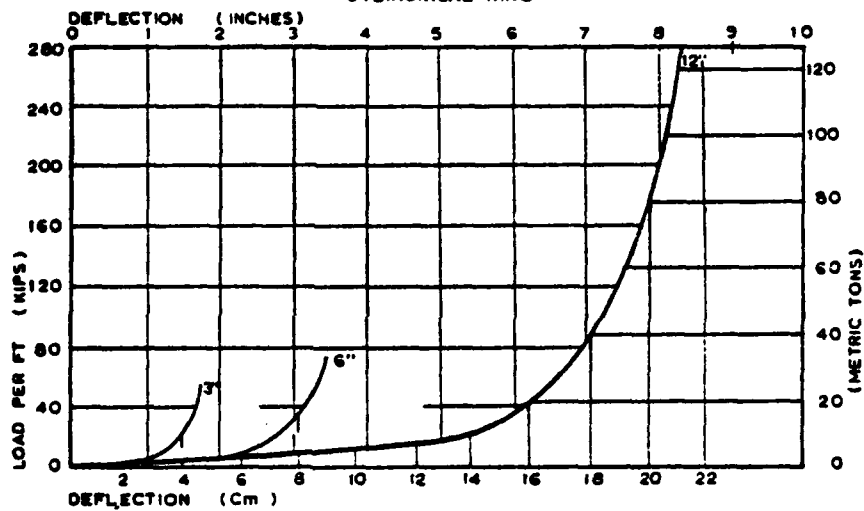


FLAT TOP WING EXTRUSION




PART NO	A	B	C	D	E	F	WT / FT	R / E
F7-2000	12	6	18	3	7	12	64	5.7
UNITS	INCHES						106	1000/1000

APPROXIMATE LOAD/ENERGY, DEFLECTION CURVES FOR MORSE STANDARD
FLAT TOP WING

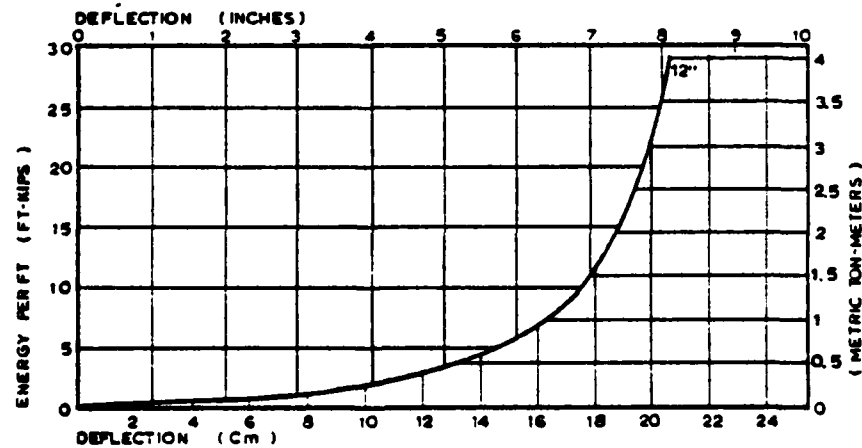
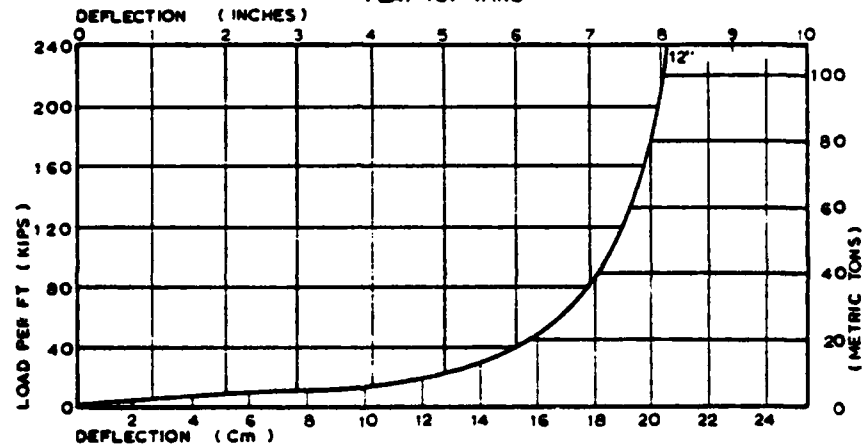


STANDARD "D" SHAPE EXTRUSION




PART NO	A	B	C	D	E	WT/FT	R/E
F9-2000	6	2.5	5		3	11.5	19.2
F9-5000	8	3	8		4	22	10
F9-3000	12	5	12		6	54	7.7
F9-0000	8	4	8		4	22	10
UNITS	INCHES					lbs	KG/FT

APPROXIMATE LOAD/ENERGY, DEFLECTION CURVES FOR MORSE STANDARD "D" SHAPE

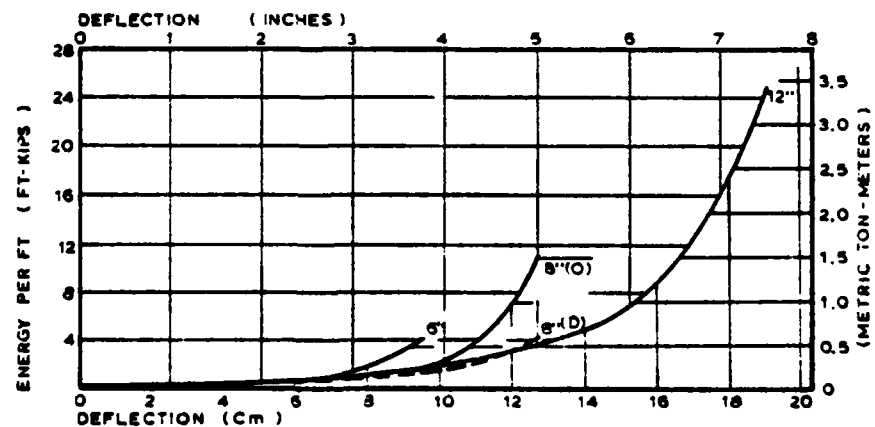
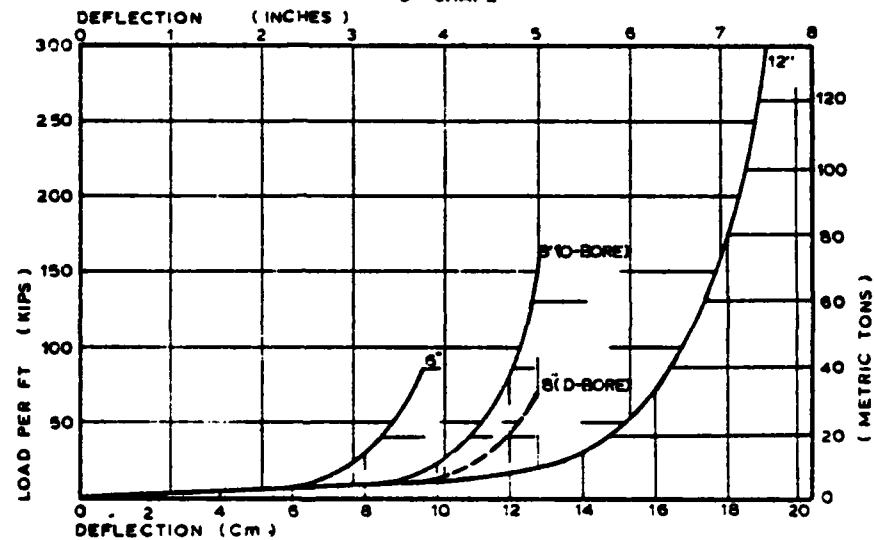


SLOPE SIDE "D" SHAPE EXTRUSION




PART N°	A	B	C	D	E	F	Wt/Ft	R/E
F9-4000	3.75	2.25	4.50	.75	2	1.50	4.5	16.7
F9-1000	6	3	6.75	1.25	2.87	2.37	12.3	13.3
UNITS	INCHES						lbs	KG/FT KIP

APPROXIMATE LOAD/ENERGY, DEFLECTION CURVES FOR MORSE STANDARD SLOPE SIDE "D" SHAPE

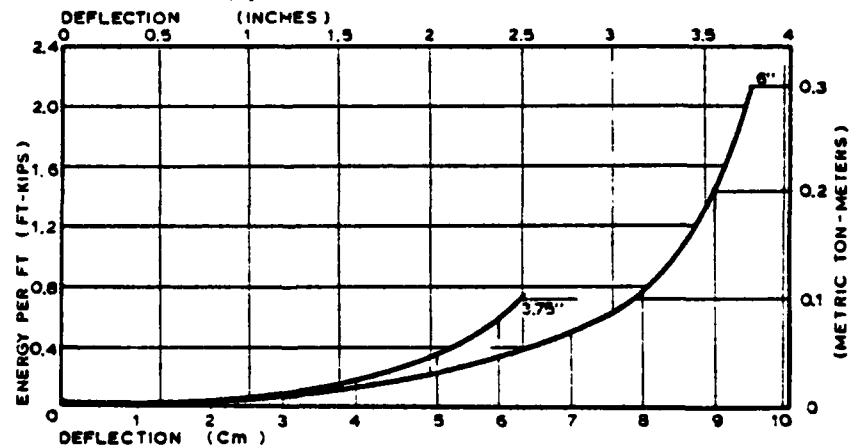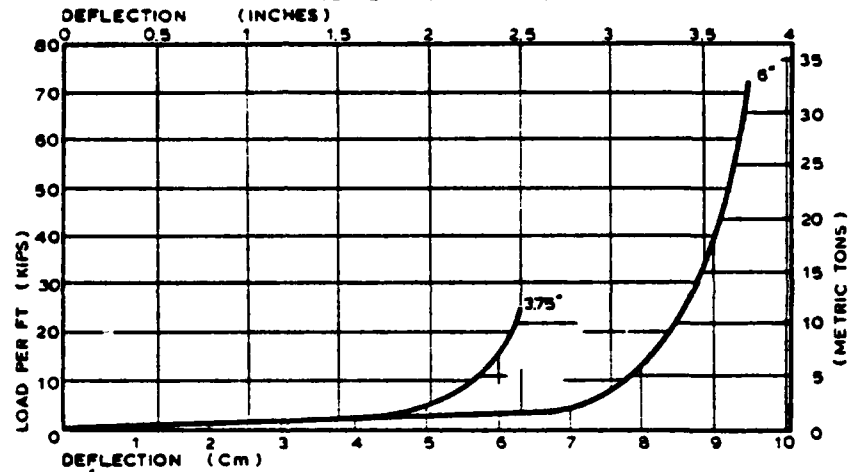

R/E CURVES

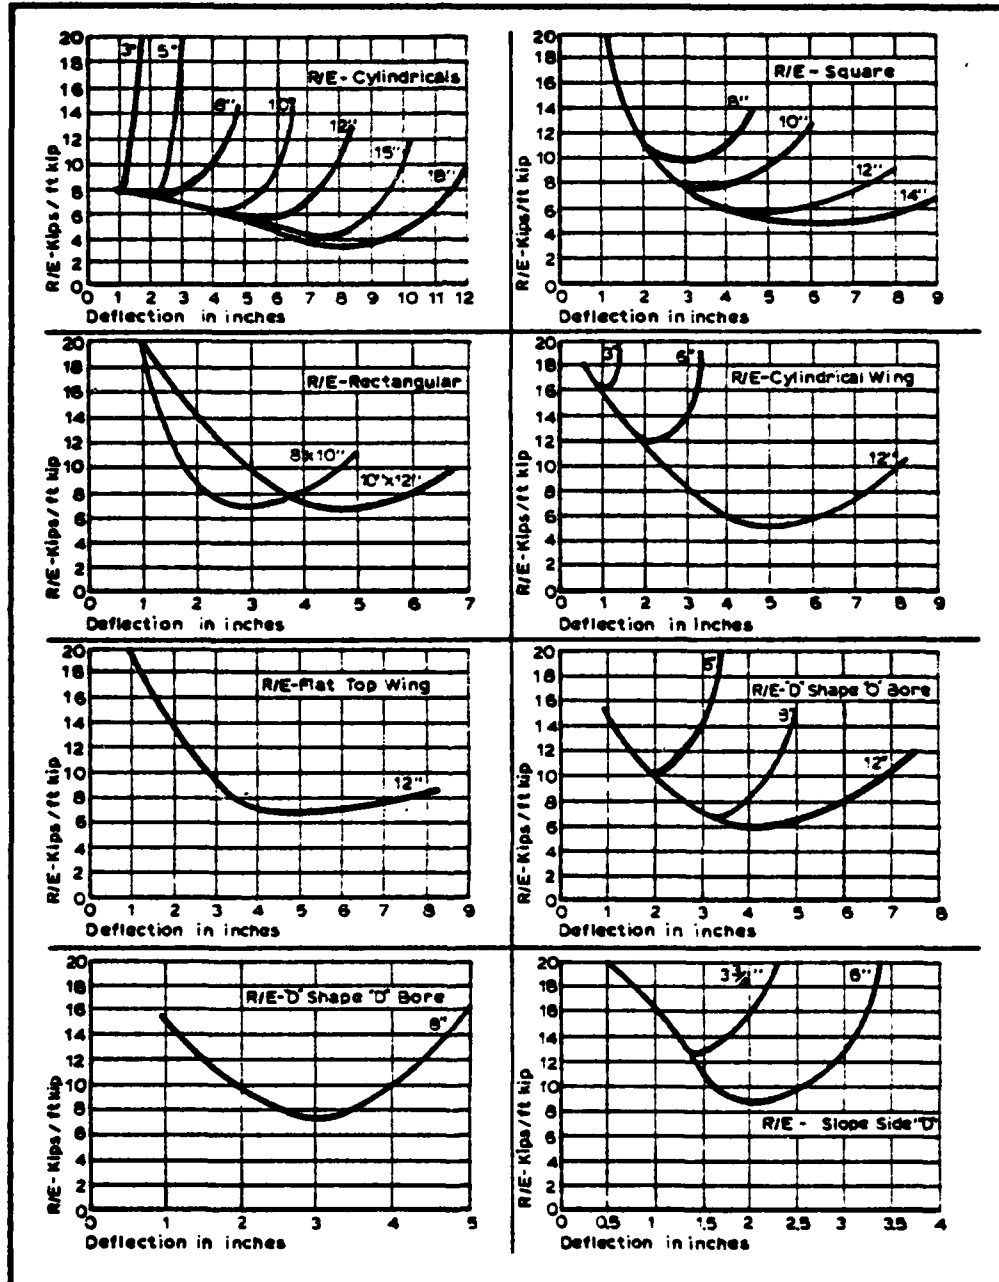

PUSHNEE® AND MODULAR BUMPERS

Morse offers a line of Pushnee® Bumpers that may be used individually or in combination with other fendering products. All Bumpers are made of Neolastic® rubber to be scuff and wear resistant. Morse Pushnee® Bumpers are also resistant to ozone, sunlight, marine growth, and temperature extremes. Bumper inserts are all carbon steel suitable for welding; however, special stocks and thicknesses are available for most Bumpers.

The patented Morse Pushnee® Bolt-On-Bumper comes complete with two carbon steel rails, drilled, tapped, and bolted on. Simply weld the rails in place. Then at replacement time unbolt, remove the worn Bumper, and bolt a new Bumper in place. The Bolt-On-Bumper comes in two convenient sizes. (See below).


Patented Modular Weld-On-Bumpers come in two styles, flat and D-shaped. Flat Modular Bumpers are ideal protective devices that can be welded to flat or curved surfaces. The D-Shaped Modular Bumpers with either a D-bore or O-bore will absorb the same amount of energy when deflected as an Extrusion of similar size absorbs. Like the Flat Modular Bumper, the D-Shaped Modular Bumper may be welded to the flat or curved surfaces of a pile, buoy, or vessel hull. See dimensional data and typical installations on page 47.

Standard Weld-On Bumpers are available in single and double width straight units, and also in 90° arcs on a nominal 18 inch radius. Dimensional details for these Bumpers can be found on page 46.

PUSHNEE® BOLT-ON BUMPERS



BOLT-ON BUMPER E42011

WT: 55 LB

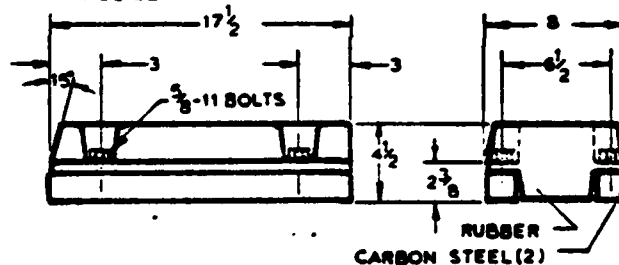

BOLT-ON BUMPER E42007


WT: 110 LB

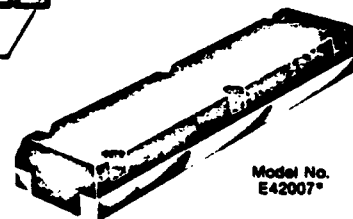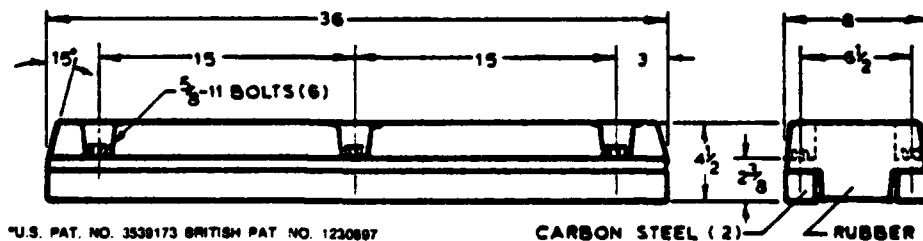

U.S. PAT. NO. 3538173 BRITISH PAT. NO. 1230867

CARBON STEEL (2) RUBBER

PUSHNEE* WELD-ON BUMPERS

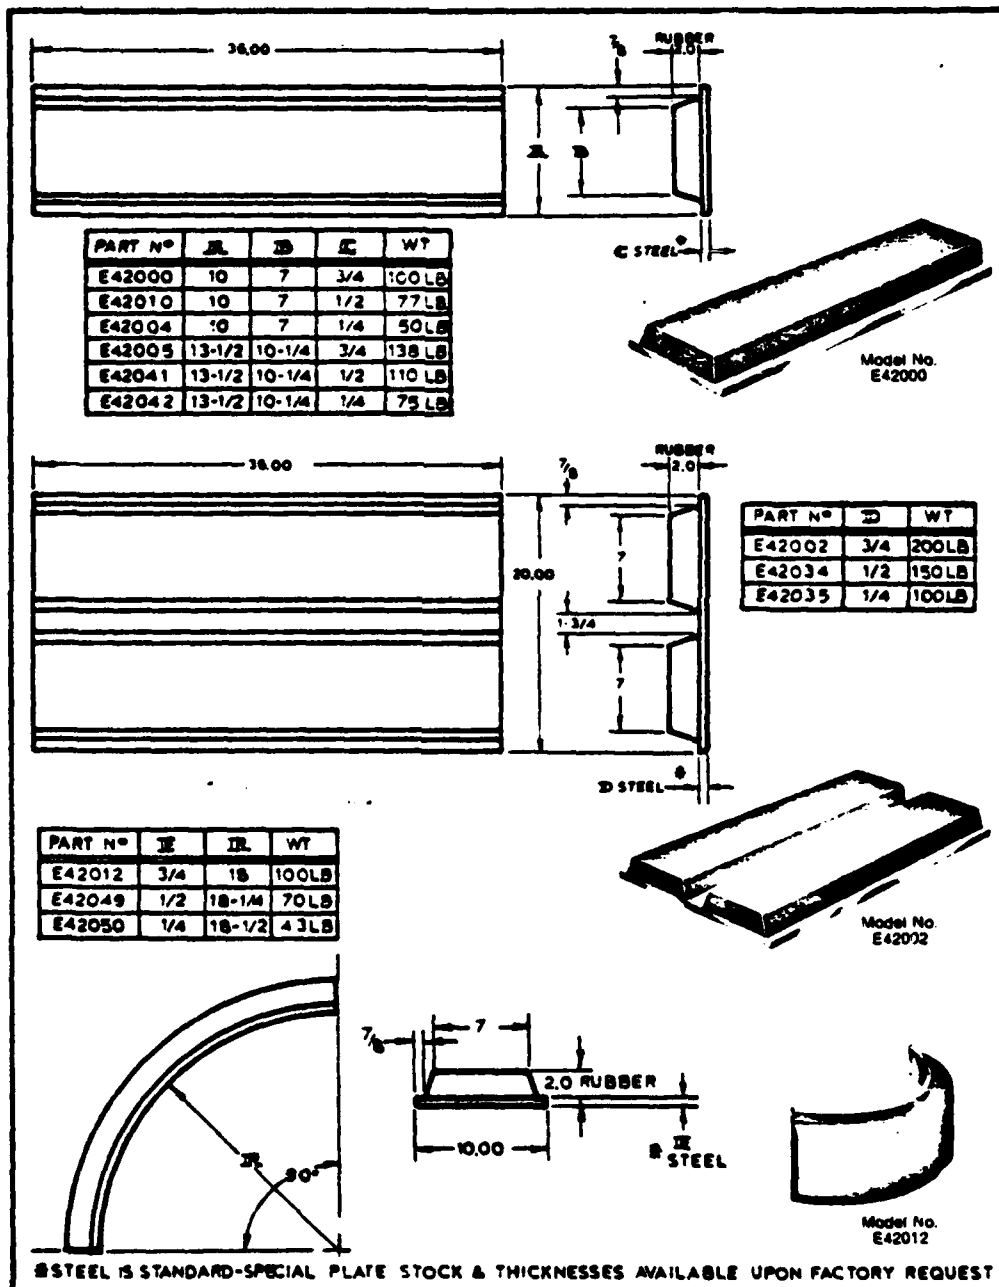

MORSE


bumpers

page


47

U.S. PAT. 3,084,272


MODULAR BUMPERS HEAVY-DUTY

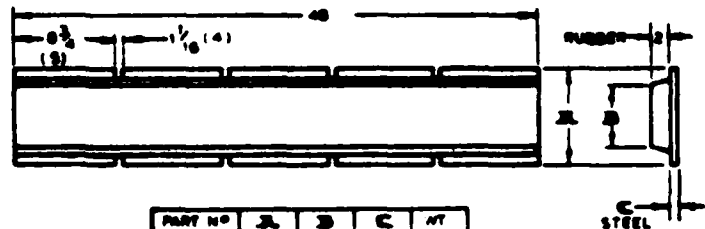


PART NO	A	B	C	WT
E47950	8	3	1/4	34LB
E47951	8	3	1/2	54LB
E47952	8	3	3/4	73LB
E47960	8	5	1/4	50LB
E47961	8	5	1/2	75LB
E47962	8	5	3/4	99LB
E47970	10	7	1/4	65LB
E47971	10	7	1/2	101LB
E47972	10	7	3/4	141LB





Model No.
E44300




Model No.
E44311

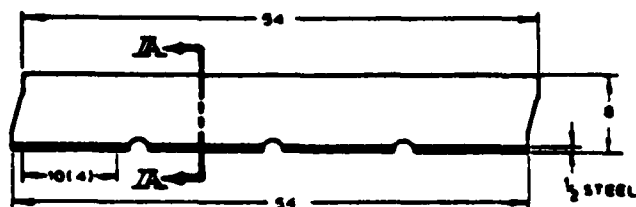


NOTE: USE LOAD & ENERGY CURVES FOR STANDARD EXTRUSIONS F9-0008 & F9-5000




- VALUES GIVEN ON THIS SKETCH ARE CALCULATED.
- PLATES HAVE FORM (SEE SECTIONS) WHICH MAKES THEM MORE RIGID THAN FLAT PLATES
- ONE SECTION WILL COVER APPROX. 75° ON 36" RADIUS

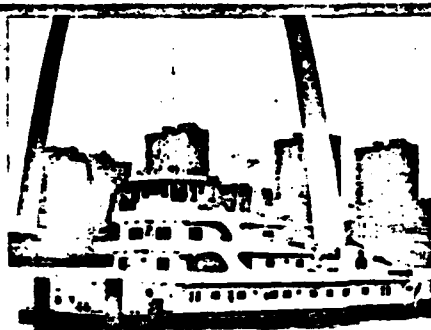


Morse Pushnee® Barge Bumpers for heavy duty usage on barges, tow boats, tugs, fishing boats — any vessel involved in heavy duty contact.

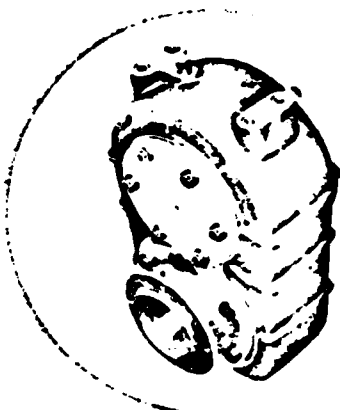


Morse Hy-Vo® Chain/case combinations are custom-designed for specific marine drive applications.

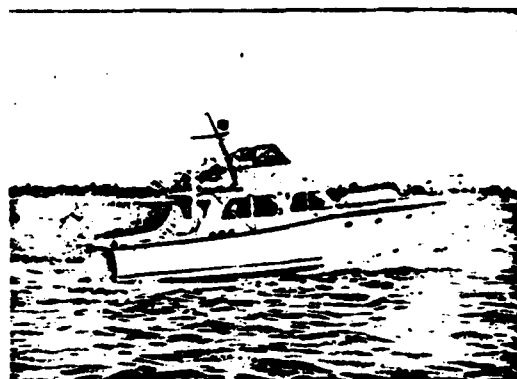

Morse Marine Bearings offer outstanding performance in pleasure crafts and seagoing vessels.

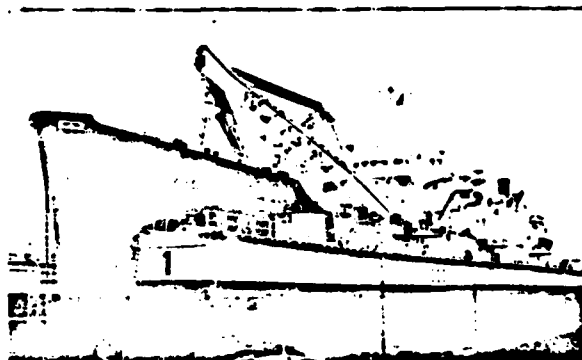


Morse Hy-Vo® powers the biggest seagoing dredge in the world.

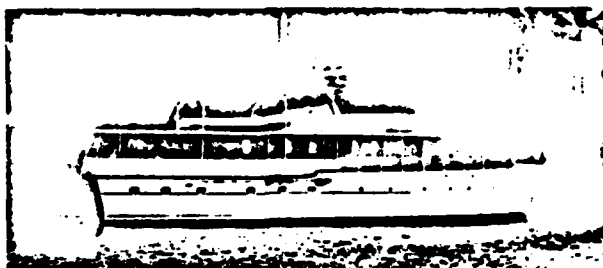

Morse Pollution-Free Marine Bearings... the clean bearing that cushions the shaft... installs in minutes... and lasts for years.

MORSE

Customer Service Centers

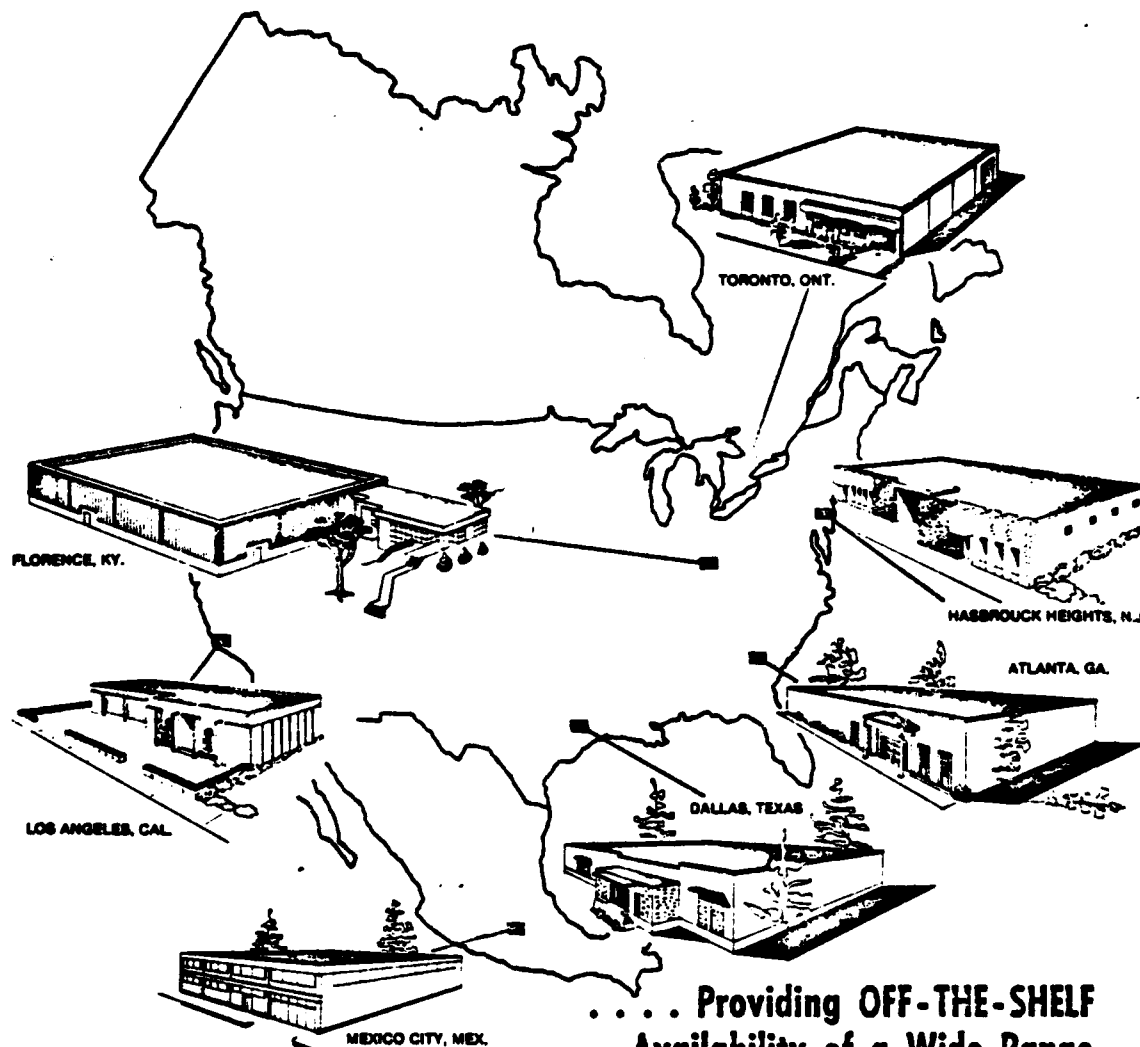

... Providing OFF-THE-SHELF
Availability of a Wide Range
of Industrial and Marine Products

UNITED STATES

Atlanta, Ga. 30336
730 Great Southwest Parkway
P.O. Box 43509
Phone 404-344-5001
WATS 800-241-4362

Florence, Ky. 41042
7120 Burlington Road
P.O. Box 728
Phone 606-342-7900
WATS 800-354-9807
OH (513-614), IN (217-618), MO, WV
800-354-9829
OH (216-419), IN (309, 312 & 815) MI, MN, PA
800-354-9892 (MN)
Telex 214154

Hasbrouck Heights, N.J. 07604
133 Industrial Ave.
Phone 201-288-4422
WATS 800-631-1900
(CN/DE/OC/MD/RH)
800-631-0771
(MAN/NY/PA/VT/WV)

Dallas, Texas 75220
2939 Blystone Lane
P.O. Box 20954
Phone 214-350-4135
WATS 800-442-3070 (TX)
800-527-5192 (Other)

Los Angeles, Cal. 90068
3386 Fruitland Ave.
P.O. Box 58047
Phone 213-583-4721
WATS 800-372-6435

CANADA

Toronto, Ont., Canada
6342 Viscount Road
Mississauga, Ontario
Phone 416-677-5961
WATS ONT (416) QUE (514-819) 800-268-0924
ONT (416) 800-268-0904
ONT (519, 613, & 705) 800-268-0990

MEXICO

Mexico 16, D.F.
Norte 81-A No. 535
Col Libertad en
Atzacapatzaco
Phone 905-561-1658
905-561-8033

EUROPE

BRITISH ISLES


Northampton NN5 5DL
Westgate Industrial Estate
Weedon Road
Phone (0904) 52414
Telex 31444

For information concerning sales facilities in other areas, contact International Department MORSE CHAIN DIVISION, Florence, Kentucky 41042 Telex 214154

FP-80

MORSE

FENDERING PRODUCTS

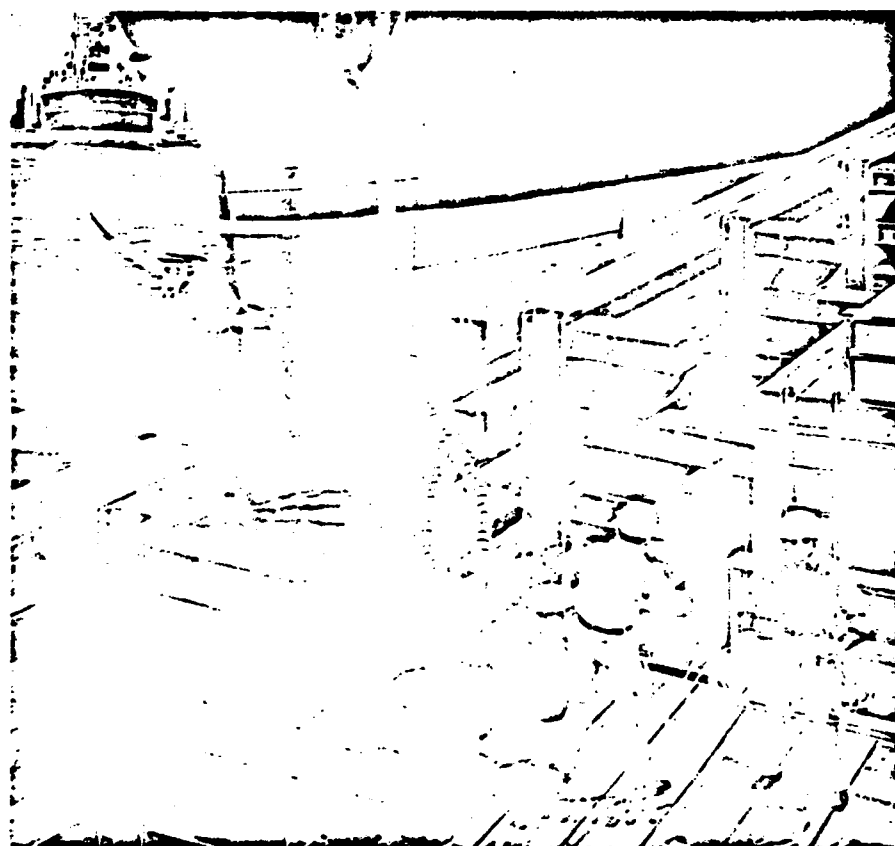


MORSE
BORG WARNER

Vibration/Shock/Noise Control Products


000101

Cell Marine Fenders


LORD Lord
Kinematics

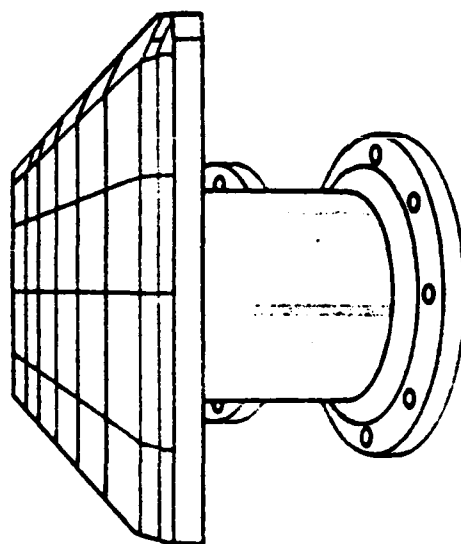

FT Series Fenders

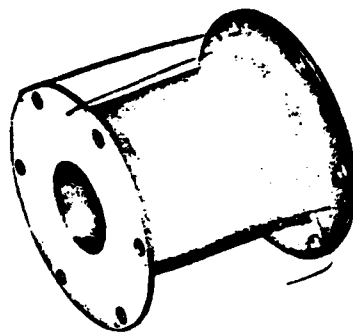

DIMENSIONS AND BOLT HOLE PATTERN OF FT SERIES FENDER

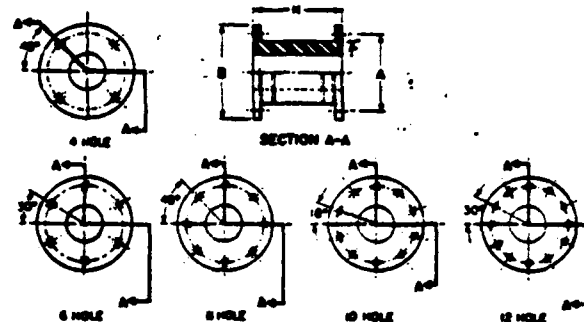

CHARACTERISTICS AND DIMENSIONS OF FT SERIES FENDERS

Fender Part Number	Energy Absorption $\pm 10\%$ ft-lbs metric ton meters			Reaction Load $\pm 10\%$ lbs metric tons			Rated Def. in.	Full Def. in.	Weight Approx. lb. kg	Fender Dimensions ¹			
	Fender Part Number -s			Fender Part Number -s						Fender Part No. -s	H in. mm	A in. mm	S in. mm
	-1	-2	-3	-1	-2	-3							
FT0400-X	9.4	7.2	5.8	18.7	14.3	11.5	7.4	7.9	165	15.75	21.65	25.59	
FT0600-X	1.3	1.0	0.8	8.5	6.5	5.2	9.3	9.9	75	400	550	650	
	18.5	15.2	11.6	31.5	24.2	19.4			210	19.68	21.65	25.58	
FT0800-X	2.7	2.1	1.6	14.3	11.0	8.8	11.8	12.4	95	500	590	680	
	38.0	30.4	23.9	50.3	38.6	30.9			485	24.80	27.56	33.07	
	5.4	4.2	3.3	22.8	17.5	14.0			220	630	700	840	
FT0900-X	78.5	61.5	48.2	79.8	61.7	47.4	15.0	15.7	680	31.50	35.44	41.34	
	11.0	8.5	6.6	36.2	28.0	21.5			400	800	900	1050	
FT1000-X	158.8	122.9	98.3	127.7	98.1	78.5	18.7	19.7	1740	39.37	43.31	51.18	
	22.1	17.0	13.6	57.9	44.5	35.6			790	1000	1100	1300	
FT1100-X	243.3	187.5	150.0	183.9	128.9	103.8	21.5	22.7	2645	45.27	51.18	59.05	
	34	26	21	77	59	47			1200	1150	1300	1500	
FT1200-X	318.6	245.8	198.7	203.5	158.5	125.2	23.4	24.5	3310	48.21	57.08	64.98	
	44	34	27	97	71	57			1500	1250	1450	1650	
FT1400-X	487.9	375.0	300.5	268.3	206.4	164.9	27.2	28.5	5070	57.08	64.98	72.83	
	67	52	42	122	94	75			2300	1450	1680	1850	
FT1600-X	838.1	481.8	383.3	319.7	245.9	198.7	28.9	31.5	8615	63.00	70.87	78.74	
	88	68	54	145	112	89			3000	1800	1900	2000	
FT1700-X	788.2	604.5	485.1	368.2	282.2	227.1	31.8	33.6	8180	66.93	74.88	82.67	
	108	84	67	167	126	103			3700	1700	1900	2100	
FT2000-X	1278.3	983.3	786.6	508.9	391.4	313.1	37.4	38.4	11025	78.74	78.74	86.62	
	177	136	109	231	178	142			5000	2000	2000	2200	
FT2250-X	2063.4	1556.6	1303.2	716.6	551.2	463.0	42.0	44.5	16320	88.58	90.55	100.39	
	285	215	180	325	250	210			7400	2250	2300	2550	
FT2500-X	2823.6	2135.8	1810.0	893.0	672.5	573.3	48.8	48.2	23800	98.42	106.30	118.14	
	390	295	250	405	305	280			10700	2500	2700	2950	
FT3000-X	4880.0	3682.0	3113.0	1279.0	970.0	827.0	56.1	56.0	40800	118.12	127.95	137.80	
	670	510	430	580	440	375			18800	3000	3250	3500	

SPECIFICATION

Material—Flexing Element—Natural Rubber Blend
Metal Plates—ASTM A283-70A, Grade C or equivalent.

For specific details and dimensions, please call or write the main plant listed on the back page.

PERFORMANCE CURVES

Curves shown are typical for the Cell Fenders. Specific curves for individual fenders will be provided upon request.

PERFORMANCE THEORY

The annular column design of the Cell Fender combines two engineering principles to produce exceptional energy absorbing capacity with low reaction force. First, the buckling column effect enables the fender to absorb initial impact in compression. Second, when buckling occurs the fender continues to absorb energy as it deflects, however, without an increase in reaction force. Third, added to the buckling column effect is the hoop effect, which gives added strength and energy capability.



SYSTEM PERFORMANCE

Frontal frames and hardware designed and manufactured by Lord Kinematics combine with Cell Fenders to complete the system. Low hull pressure is achieved through properly sized contact area. Low shear forces are the result of low coefficient of friction polymeric contact pads which are resistant to wear, gouging, and tearing.



SYSTEM ECONOMY

Complete Cell Fender Systems are economical to purchase and install. Their performance permits new installations to be designed to cost less and existing installations to handle large vessels. Generally, the frontal frame requires no pile support which also reduces cost.



FT0400 Fender

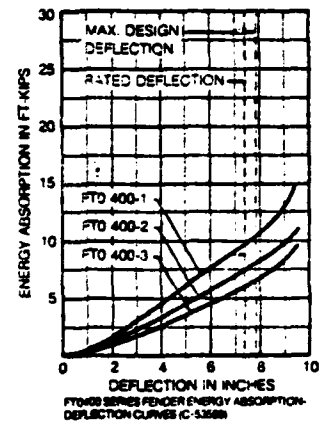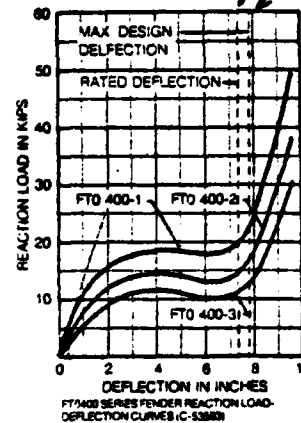

FT1250 Fender

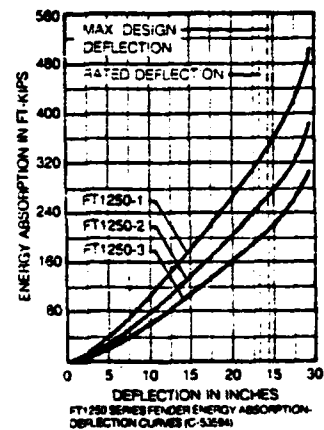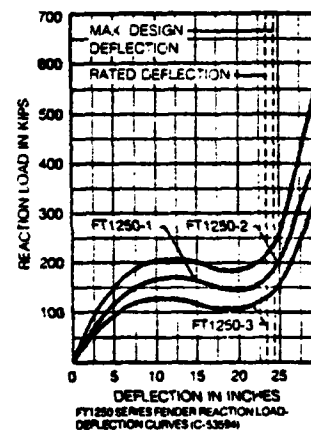

FT3000 Fender

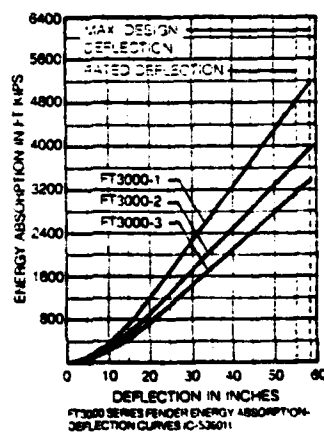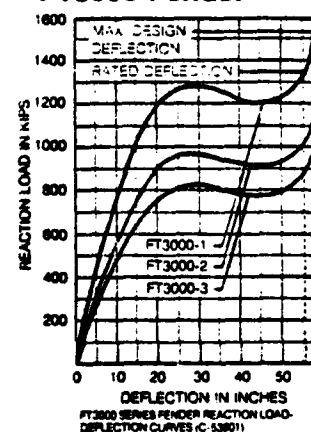

Cell Marine Fender Systems

Cell Fenders are available in the range of sizes listed on page 2. They can be designed into new or existing berthing facilities in a variety of patterns. Figure 1 shows some of the typical arrangements that are recommended.

FIGURE 1

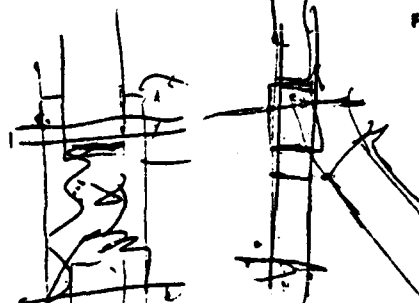
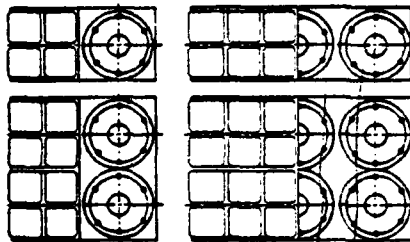


FIGURE 2

TOP VIEW

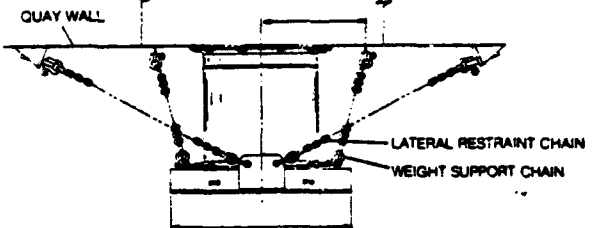



FIGURE 3

SIDE VIEW


Fender Anchors

Specialty designed anchor sleeves, bolts and washers for embedment during concrete casting are available for each fender. Each kit includes sleeve, bolt and washer.

J-13945 SERIES



J-14445 SERIES



Anchor Sleeve Part Number	Use with Fender Part Number	Number Required Each Fender	Imbedded Length (L) in inches	Bolt Thread 0 x T in inches
J-13945-1	FT0400	4	7-3/8	7/8 x 2-1/2
J-13945-2	FT0500	4	7-7/8	1 x 2-1/2
J-14445-1	FT0630	4	7-1/8	1-1/8 x 3-1/4
J-14445-2	FT0800	6	8-1/2	1-1/4 x 4
J-14445-3	FT1000	6	10-3/4	1-1/2 x 4-3/4
J-14445-15	FT1150	6	12-1/2	1-5/8 x 5-1/8
J-14445-4	FT1250	6	13-1/2	1-3/4 x 5-1/2
J-14445-16	FT1450	8	15-1/2	2 x 6-1/2
J-14445-5	FT1600	8	15-1/2	2 x 6-3/8
J-14445-17	FT1700	8	15-3/4	2-1/4 x 6-3/4
J-14445-6	FT2000	8	16	2-1/2 x 7-3/4
J-14445-18	FT2250	10	16-3/4	2-1/2 x 7-3/4
J-14445-19	FT2500	10	16-3/8	2-1/2 x 7-3/4
J-14445-14	FT3000	12	20	3 x 7-1/2

For More Information:

Lord Kinematics
Lord Corporation
1635 West 12th Street
P.O. Box 2051
Erie, PA 16512
(814) 456-8511

838 7691 Young

Printed in U.S.A. ©1978 Lord Corporation

4/78-1M

LORD Lord Kinematics

APPENDIX B
CURRENT LOADS

Current Variations Considered	1-3 knots
Current Maximum Considered	7 knots
Immersion Depth Maximum	20 feet
Piling Diameters Considered	6 inches
	12 inches
	18 inches

Reynold's Number Calculated for each Diameter and velocity

$$Re = \frac{U_{\infty} D_p}{\nu}$$

Drag Coefficient obtained from Reference 5, P. 17

Calculation of Drag Force F_D using

$$F_D = C_D A \frac{\rho U_{\infty}^2}{2} \quad [\text{Ref. 4, P. 223}]$$

	1 knot	2 knots	3 knots	7 knots
6"	32.65 lbf	54.41 lbf	127.32 lbf	799.84 lbf
12"	65.27 lbf	74.064 lbf	185.05 lbf	1756.32 lbf
18"	82.65 lbf	119.1 lbf	297.50 lbf	2793.1 lbf

APPENDIX C

WIND LOADS

Wind Variations Considered	0-75 miles/hour
Wind Maximum Considered	75 miles/hour
Piling Exposed to Wind	12 feet
Sail Area Exposed to Wind	9 sq. feet
Piling Diameters Considered	6 inches
	12 inches
	18 inches

Reynold's Number Calculated for each Diameter and Velocity

$$Re = \frac{U_{\infty} D_p}{\nu}$$

Drag Coefficient for piling taken from Reference 5, P. 17




Drag Coefficient for sail area taken from Reference 4, P. 388

Calculation of Drag Force F_d using

$$F_D = D_C A \frac{\rho U_{\infty}^2}{2} \quad [\text{Ref. 4, P. 223}]$$

	20	40	60	75
sail area	10.94 lbf	44.16 lbf	99.21 lbf	155.27 lbf
6" piling	3.65 lbf	14.7 lbf	33.05 lbf	51.64 lbf
12" piling	7.26 lbf	29.32 lbf	65.86 lbf	102.91 lbf
18" piling	10.94 lbf	44.16 lbf	99.21 lbf	155.02 lbf

APPENDIX D
BEAM EQUATIONS

Type of Beam	Reactions	Deflection at Any Point x
	$R_1 = W$ $M_1 = Wa$	For $x < a$, $\frac{W}{6EI}(-x^3 + 3x^2a)$ For $x \geq a$ $\frac{W}{6EI}(3a^2x - a^3)$
	$R_1 = wL$ $M_1 = \frac{wL^2}{2}$	$\frac{wx^3}{24EI}(x^2 + 6L^2 - 4Lx)$
	$R_1 = 0$ $M_1 = M$	$\frac{Mx^2}{2EI}$
	$R_1 = \frac{Wb}{L}$ $R_2 = \frac{Wa}{L}$	For $x < a$, $\frac{Wb}{6LEI}[-x^3 + (L^2 - b^2)x]$ For $x \geq a$, $\frac{Wb}{6LEI}\left[\frac{L}{b}(x-a)^3 - x^3 + (L^2 - b^2)x\right]$

Maximum Deflection	Important Slopes	Maximum Moment	Maximum Shear Force
$\frac{Wa'(3L-a)}{6EI}$	$\theta_{\max} = \frac{Wa^2}{2EI}$	Wa at $x = 0$	W at $x < a$
$\frac{w_1 L^4}{8EI}$	$\theta_{\max} = \frac{w_1 L^3}{6EI}$	$\frac{w_1 L^2}{2}$ at $x = 0$	$w_1 L$ at $x = 0$
$\frac{M^* L^2}{2EI}$	$\theta_{\max} = \frac{M^* L}{EI}$	M^* at all x	0
$\frac{Wb(L^2 - b^2)^{3/2}}{9\sqrt{3}EI}$ at $x = \sqrt{(L^2 - b^2)/3}$	$\theta_1 = \frac{Wab(2L-a)}{6LEI}$ $\theta_2 = \frac{Wab(2L-b)}{6LEI}$	$\frac{Wab}{L}$ at $x = a$	If $a > b$, $\frac{W a}{L}$ at $x > a$ If $a < b$, $\frac{W b}{L}$ at $x < a$

APPENDIX E

GIFTS

The GIFTS system is a finite element linear analysis program presently available for use at the Naval Postgraduate School, Monterey, California.

GIFTS may be used to construct finite element models, display created models, add loads and define boundary conditions, and perform static or dynamic analysis. These capabilities are fully explained through the use of GIFTS' documentation library available through Prof. G. Cantin, Mechanical Engineering Department, at the Naval Postgraduate School.

For the purpose of this thesis the EDITM module was used to create a 6 element, 3 dimensional, circular cross section beam element.

A typical program running sequence includes;

EDITM	model generation
EDITLB	load and boundary condition definitions
OPTIM	optimizes the internal numbering sequence in order to reduce disk requirements and increase the speed of solution
STIFF	creates the stiffness matrix
DECOM	decomposes stiffness matrix
DEFL	calculates deflections
STRESS	calculates stress

RESULT allows user to review solution

Included in this appendix is a typical collection of output data from the GIFTS program.

JOB MILLER	9- 8-82	LOADING CASE 1	9 58 44	PAGE 1
NP 6 0	VY 0	LOADS VZ -3 000E+02 0	MY 0	MZ 0
VX				

*

JOB MILLER		9- 8-82		9:55:12		PAGE 1	
NP	X	Y	Z	DEP	MFP	LPD	
1	0 0	0 0	0 0	0	111111	000000	
2	1 2000E+00	0 0	0 0	0	111111	000000	
3	2 4000E+00	0 0	0 0	0	111111	000000	
4	3 6000E+00	0 0	0 0	0	111111	000000	
5	4 8000E+00	0 0	0 0	0	111111	000000	
6	6 0000E+00	0 0	0 0	0	111111	000000	
7	5 0000E-01	0 0	0 0	0	111111	000000	
8	1 5000E+00	0 0	-1 0000E+01	0	111111	000000	
9	2 8333E+00	0 0	-1 0000E+01	0	111111	000000	
10	4 1667E+00	0 0	-1 0000E+01	0	111111	000000	
11	5 5000E+00	0 0	-1 0000E+01	0	111111	000000	

*

JOB MILLER		9- 8-82		9 53:28	PAGE 1	
NM TYP E		V	C	SY	P	A
1	1	200E+03	4 800E-01	4 054E+02	5 000E+02	7 339E-04 6 500E-06

*

PAGE 1

9 52 1

9- 8-82

JOB MILLER

THICKNESS GROUP # 1 --- HOLLOW CIRCULAR

R0 - 3 0000E+00

R1 - 2 5000E+00

ZA - 0 0

YA - 0 0

TH - 0 0


*

JOB MILLER		9- 8-82	LOADING CASE	10 17 10	PAGE 1
NP	U	V	W	THY	THZ
1	0 0	0 0	0 0	0 0	0 0
2	0 0	0 0	-1 181E-01	2 459E-02	0 0
3	0 0	0 0	-2 624E-01	4 372E-02	0 0
4	0 0	0 0	-4 264E-01	5 738E-02	0 0
5	0 0	0 0	-6 035E-01	6 558E-02	0 0
6	0 0	0 0	-7 872E-01	6 831E-02	0 0


*

APPLIED LOADS	RESULTANT FORCES	BEAM PROPERTIES
QX _____ 0 0	N _____ 0 0	A = 8 639E+00 AQ = 4 320E+00 AP = 4 320E+00 IP = 3 294E+01 IQ = 3 294E+01 J = 6 588E+01 ZG = 0 0 YG = 0 0 ZO = 0 0 YO = 0 0 AL = 0 0
QY _____ 0 0	UY _____ 0 0	
QZ _____ 0 0	UZ _____ 1 500E+02	YIELD STRESS S 000E+02
QMX _____ 0 0	MX _____ 0 0	BEAM FORCES N = 0 0 UY = 0 0 UZ = 1 500E+02 MX = 0 0 BY = -8 100E+02 BZ = 0 0
ELEMENT NO 1 LOADING CASE 1	BY _____ -9 000E+02	
LIST DESIRED X/L VALUES ? 1	BZ _____ 0 0	
		JOB MILLER 9-8-82 10 9 57

NORMAL STRESS
MAX - 8 197E+01

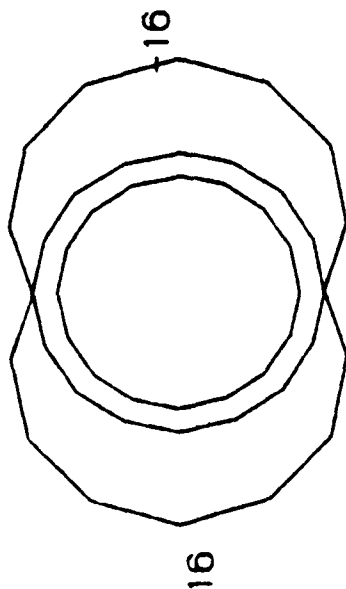

SHEAR STRESS
MAX - 3 444E+01

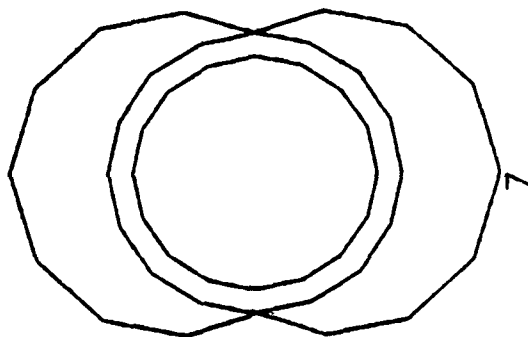

BEAM PROPERTIES

A - 8 639E+00
AQ - 4 320E+00
AP - 4 320E+00
IP - 3 294E+01
IQ - 3 294E+01
J - 6 588E+01
ZC - 0 0
YC - 0 0
ZO - 0 0
YO - 0 0
AL - 0 0

YIELD STRESS
5 000E+02

BEAM FORCES

N - 0 0
UY - 0 0
UZ - 1 500E+02
MX - 0 0
BY - -9 000E+02
BZ - 0 0

q
P-7

ELEMENT NO 1
LOADING CASE 1
STRESSES LABELLED
IN PERCENT OF YIELD



1 2

X/L - 0 0

JOB: MILLER
9- 8-82
10:14 4

NORMAL STRESS
MAX - 7 378E+01

SHEAR STRESS
MAX - 3 444E+01

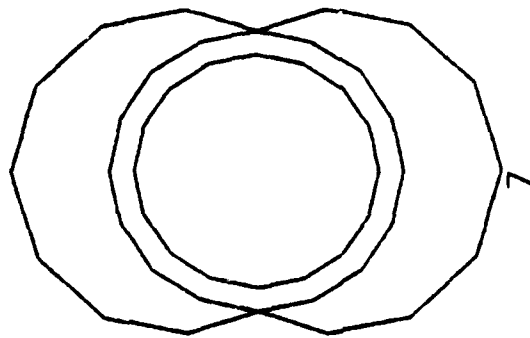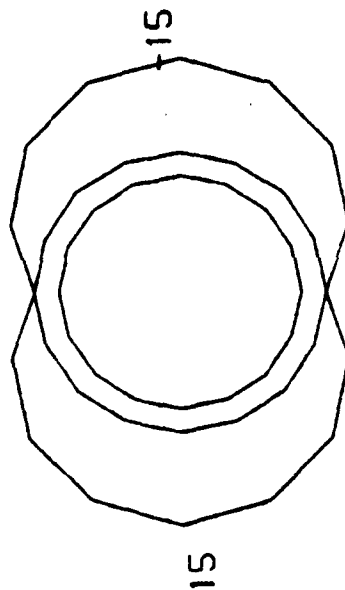

BEAM PROPERTIES
A - 8 639E+00
AQ - 4 320E+00
AP - 4 320E+00
IP - 3 294E+01
IQ - 3 294E+01
J - 6 588E+01
ZC - 0 0
YC - 0 0
ZO - 0 0
YO - 0 0
AL - 0 0

YIELD STRESS
5 000E+02


BEAM FORCES
N - 0 0
UY - 0 0
UZ - 1 500E+02
MX - 0 0
BY - -8 100E+02
BZ - 0 0

q
P-7

ELEMENT NO 1
LOADING CASE 1
STRESSES LABELLED
IN PERCENT OF YIELD

1 ——— 2
X/L - 5 000E-01

JOB: MILLER
9-8-82
10 12 15

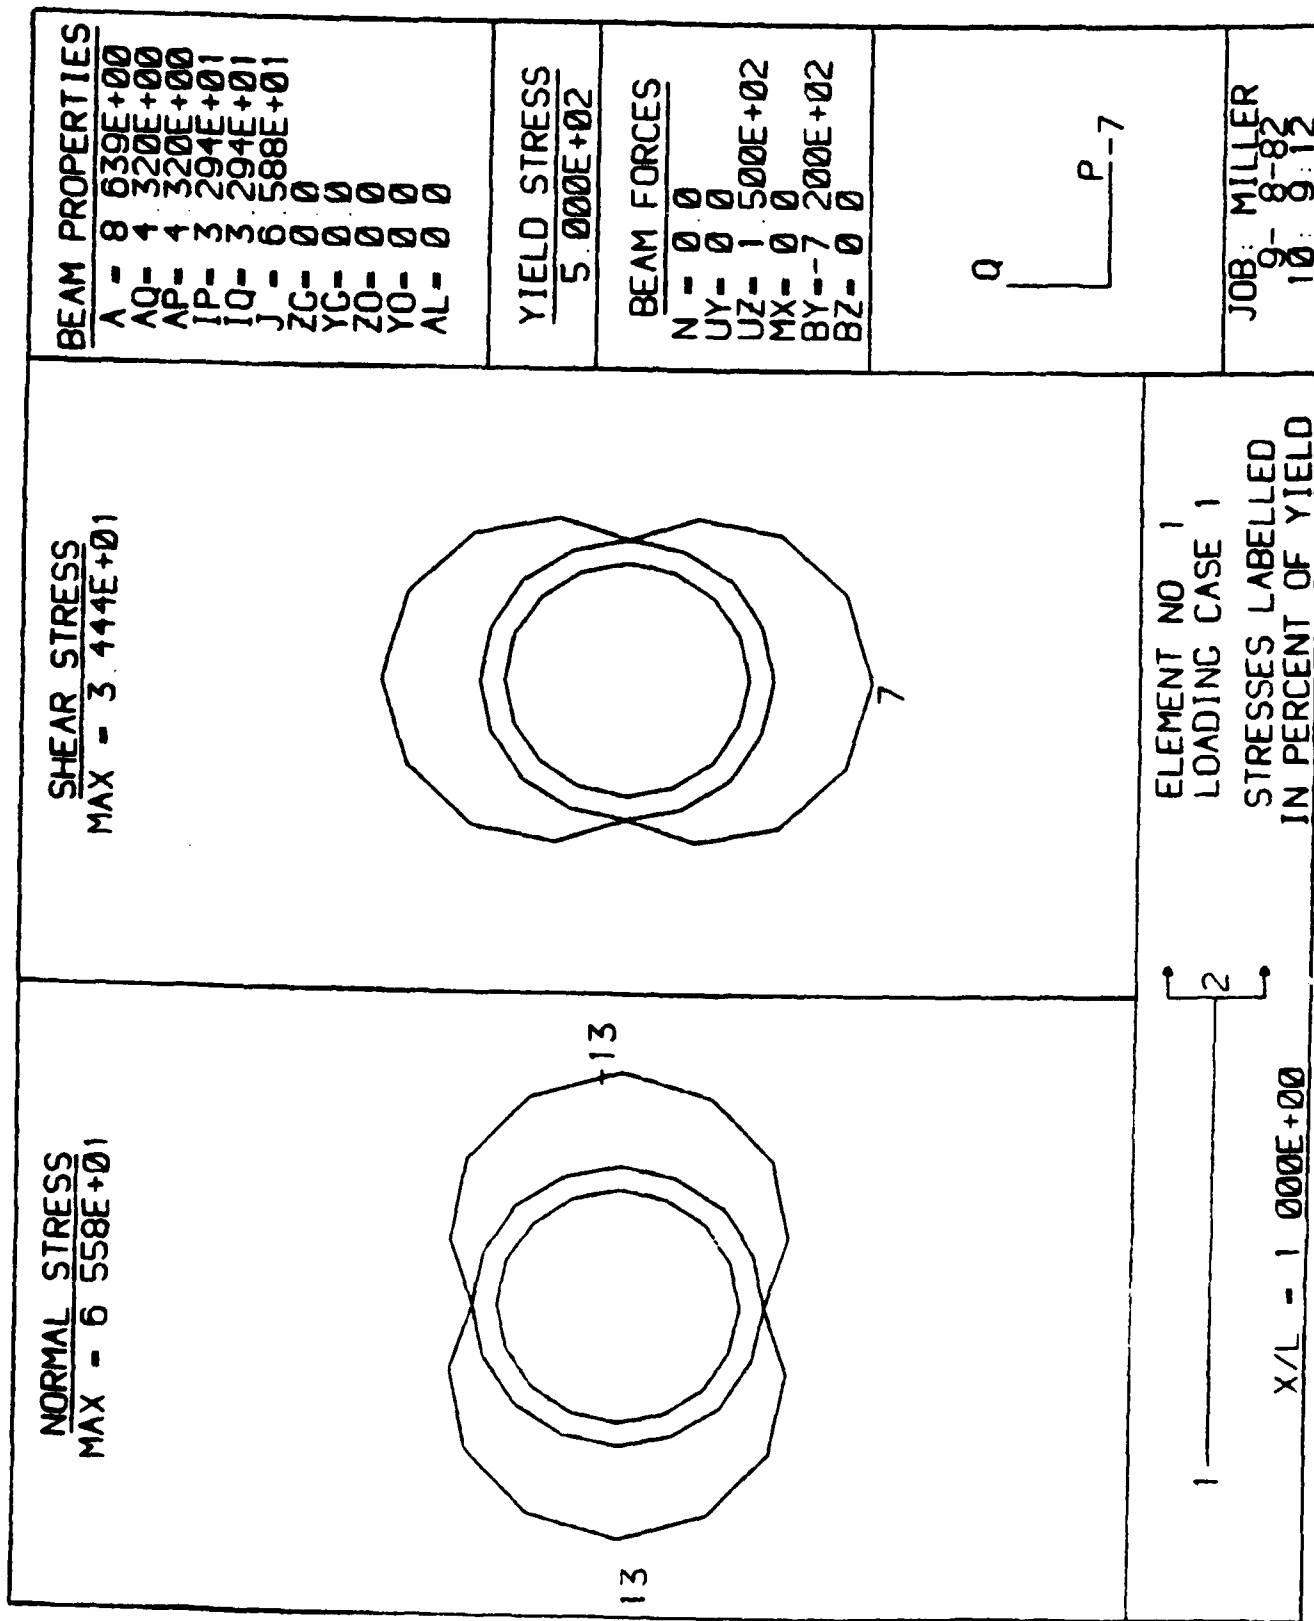

APPENDIX F

ADINA

ADINA is a flexible finite element program allowing linear and nonlinear, static and dynamic analysis. The program offers a choice of six element types and twenty material models that are used in conjunction with the different elements types. For the purpose of this thesis a 3-dimensional circular cross section beam element was employed. Ideally this element should have been coupled with Mooney-Rivlin material model. However in ADINA this material type is only available in 2-dimensional continuum elements for plane stress only. It was decided to use the elastic-plastic material model even though it did not match the response of the linear through nonlinear ranges. Using ADINA's nonlinear formulation to allow for large displacement, it was hoped that the elastic-plastic material model's response would map any slight linear response exhibited by the experimental model. Included in this appendix is a typical ADINA output and associated data file.

Although the version of ADINA installed at the Naval Postgraduate School is not the most current, it is an extremely powerful tool. Additional information on the many applications of ADINA may be received from Prof. G. Cantin, Mechanical Engineering Department, at the Naval Postgraduate School.

STATIC ANALYSIS OF A CIRCULAR CROSS-SECTION BEAM			
SECTION	Y	Z	NUMBER
1	0.0	0.0	0
2	0.0	0.0	0
3	0.0	0.0	0
4	0.0	0.0	0
5	0.0	0.0	0
6	0.0	0.0	0
7	0.0	0.0	0
8	0.0	0.0	0
9	0.0	0.0	0
10	0.0	0.0	0
11	0.0	0.0	0
12	0.0	0.0	0
13	0.0	0.0	0
14	0.0	0.0	0
15	0.0	0.0	0
16	0.0	0.0	0
17	0.0	0.0	0
18	0.0	0.0	0
19	0.0	0.0	0
20	0.0	0.0	0
21	0.0	0.0	0
22	0.0	0.0	0
23	0.0	0.0	0
24	0.0	0.0	0
25	0.0	0.0	0
26	0.0	0.0	0
27	0.0	0.0	0
28	0.0	0.0	0
29	0.0	0.0	0
30	0.0	0.0	0
31	0.0	0.0	0
32	0.0	0.0	0
33	0.0	0.0	0
34	0.0	0.0	0
35	0.0	0.0	0
36	0.0	0.0	0
37	0.0	0.0	0
38	0.0	0.0	0
39	0.0	0.0	0
40	0.0	0.0	0
41	0.0	0.0	0
42	0.0	0.0	0
43	0.0	0.0	0
44	0.0	0.0	0
45	0.0	0.0	0
46	0.0	0.0	0
47	0.0	0.0	0
48	0.0	0.0	0
49	0.0	0.0	0
50	0.0	0.0	0
51	0.0	0.0	0
52	0.0	0.0	0
53	0.0	0.0	0
54	0.0	0.0	0
55	0.0	0.0	0
56	0.0	0.0	0
57	0.0	0.0	0
58	0.0	0.0	0
59	0.0	0.0	0
60	0.0	0.0	0
61	0.0	0.0	0
62	0.0	0.0	0
63	0.0	0.0	0
64	0.0	0.0	0
65	0.0	0.0	0
66	0.0	0.0	0
67	0.0	0.0	0
68	0.0	0.0	0
69	0.0	0.0	0
70	0.0	0.0	0
71	0.0	0.0	0
72	0.0	0.0	0
73	0.0	0.0	0
74	0.0	0.0	0
75	0.0	0.0	0
76	0.0	0.0	0
77	0.0	0.0	0
78	0.0	0.0	0
79	0.0	0.0	0
80	0.0	0.0	0
81	0.0	0.0	0
82	0.0	0.0	0
83	0.0	0.0	0
84	0.0	0.0	0
85	0.0	0.0	0
86	0.0	0.0	0
87	0.0	0.0	0
88	0.0	0.0	0
89	0.0	0.0	0
90	0.0	0.0	0
91	0.0	0.0	0
92	0.0	0.0	0
93	0.0	0.0	0
94	0.0	0.0	0
95	0.0	0.0	0
96	0.0	0.0	0
97	0.0	0.0	0
98	0.0	0.0	0
99	0.0	0.0	0
100	0.0	0.0	0

1

A FINITE ELEMENT PROGRAM FOR AUTOMATIC DYNAMIC INCREMENTAL NONLINEAR ANALYSIS

REFERENCE- REPORT 0248-1, ACOUSTICS AND VIBRATION LABORATORY,
M. I. T., 1973, REV.-MAY 1976

STATIC ANALYSIS OF A CIRCULAR CROSS-SECTION RUBBER BEAM

MASTER CONTROL CARDS

CARD ALPBER 1

NUMBER OF ACIAL PCINTS (NUMNP) = 3
 MASTER X-TRANSLATION CODE (IDOF(1)) = 0
 MASTER Y-TRANSLATION CODE (IDOF(2)) = 0
 MASTER Z-TRANSLATION CODE (IDOF(3)) = 0
 MASTER X-FACTATION CODE (IDOF(4)) = 0
 MASTER Y-FACTATION CODE (IDOF(5)) = 0
 MASTER Z-FACTATION CODE (IDOF(6)) = 0
 NUMBER OF LINEAR ELEMENT GROUPS (NEGL) = 0
 ALPBER OF ACNLINAR ELEMENT GROUPS (NEGML) = 1
 SOLUTION CODE (MODEX) = 1
 EQ-0: DATA TECH
 EQ-1: ANALYSIS
 EQ-2: POSTAN
 NUMBER OF TIME STEPS (NSTE) = 2
 TIME STEP INCREPENT (DT) = 0.1000D+00
 TIME AT SOLUTION START (TSTART) = 0.0
 PRINTING INTERVAL (IPRI) = 1
 RESTART SAVE INTERVAL (IRINT) = 9999
 TEMPERATURE TAPE FLAG
 EQ-0: TEMPERATURE TAPE NOT USED
 EQ-1: TEMPERATURE TAPE USED

CARD ALPBER 2

MASS MATRIX CODE EFFECTS (IMASS) = 0
 EQ-0: AC MASS EFFECTS
 EQ-1: UPPER MASS
 EQ-2: CONSISTENT MASS
 DAMPING MATRIX CODE (IDAMP) = 0
 EQ-0: NO DAMPING
 EQ-1: DAMPING INCLUDED
 NUMBER OF MODAL MASSES (IMASSM) = 0
 NUMBER OF ACIAL DAMPERS (IDAMPN) = 0

CARD ALPBER 3

FREQUENCIES SOLUTION CODE (IEIG) = 0
 EQ-0: FREQUENCIES ARE SOLVED
 EQ-1: FREQUENCIES AND MODE SHAPES ARE DETERMINED

FILE: ACINA CUTPLT A NAVAL POSTGRADUATE SCHOOL

CARD ALPHER 4

NUMBER OF TIME STEPS BETWEEN REFORMING
EFFECTIVE STIFFNESS MATRIX (ISREF) = 1
NUMBER OF ALLCABLE STIFFNESS REFORMATIONS
IN EACH TIME STEP (NUMREF) = 0
NUMBER OF TIME STEPS BETWEEN
EQUILIBRIUM ITERATIONS (IEQUIT) = 1
NUMBER ALPHER OF EQUILIBRIUM
ITERATIONS PERMITTED (ITEMAX) = 50
CONVERGENCE TOLERANCE (RTOL) = 0.100-02

CARD ALPHER 5

TIME INTEGRATION CODE (IIOPE) = 1
EQU. 1. SLSKIN THE TA METHOD
EQU. 2. REMARKS METHOD
INTEGRATION PARAMETER (IMETA) = 0.0

CARD ALPHER 6

NUMBER OF BLOCKS OF NODAL PRINTOUT (NPS) = 1
DISPLACEMENT PRINTOUT CODE
EQU. 1. PRINT DISPLACEMENTS (IDCI) = 1
EQU. 2. PRINT DISPLACEMENTS
VELOCITY PRINTOUT CODE
EQU. 1. PRINT VELOCITIES (IWC) = 1
EQU. 2. PRINT VELOCITIES
ACCELERATION PRINTOUT CODE
EQU. 1. PRINT ACCELERATIONS (IAC) = 1
EQU. 2. PRINT ACCELERATIONS

CARD ALPHER 7

BLOCK 1
FIRST ACCE OF THIS BLOCK (IPMODE(1,1)) = 1
LAST ACCE OF THIS BLOCK (IPMODE(2,1)) = 3

ANALYSIS TYPE (ESTABLISHED USING INASS, MEGL, MEGL)
TYPE DEPENDENCY CODE (IISTAT) = 0
EQU. 0. STATIC ANALYSIS
EQU. 1. DYNAMIC ANALYSIS
NONLINEARITY CODE (IKLIN) = 1
EQU. 0. LINEAR ANALYSIS
EQU. 1. NONLINEAR ANALYSIS
CORE INFORMATION CODE (IDECIM) = 0

FILE: ACIMA CUPPUT A NAVAL POSTGRADUATE SCHOOL

CETAINAC . . .

1 A C C A L P C I A T D A T A

INPUT NCCAL DATA

NCCDE BOUNDARY CONDITION CODES

P	V	Z	XX	VY	ZZ
1	1	1	1	1	1

NODAL POINT COORDINATES

X	Y	Z
0.000	0.0	0.0
1.000	-10.000	0.0

MESH GENERATING CODES

KM	IT
0	0

GENERATE NCCAL DATA

NCCDE BOUNDARY CONDITION CODES

P	V	Z	XX	VY	ZZ
1	1	1	1	1	1

NODAL POINT COORDINATES

X	Y	Z
0.000	0.0	0.0
1.000	-10.000	0.0

EQUATION NUMBERS

A	X	Y	Z	XX	VY	ZZ
1	0	0	0	0	0	0

CCAL INFORMATION
REQUESTED CODE . . (DECIMAL) . .
OBTAINED . . .

1 L O A C C E N T R C L D A T A

NUMBER OF LOADS
NUMBER OF LOAD CURVES
MAX NUMBER OF POINTS IN LOAD CURVES =
GRAVITY LOADS (LOGICALLY) =
LOGICALLY LOADING
LOGICALLY GRAVITY LOADING

1 I N I T I A L C C N C I T I O N S

INITIAL CONDITIONS CODE
LOGICALLY INITIAL CONDITIONS
LOGICALLY INITIAL CONDITIONS ARE READ
LOGICALLY INITIAL CONDITIONS ARE READ
(BUT MESH OVER-RIDES LOGIC)

INITIAL CONDITIONS PRINT-OUT CODE
LOGICALLY INITIAL CONDITIONS
LOGICALLY INITIAL CONDITIONS

1 E L E M E N T G R O U P D A T A

E L E M E N T G R O U P 1 (NONLINEAR)

FILE: ACINA OUTPUT A NAVAL POSTGRADUATE SCHOOL

STORAGE CHECK FOR ELEMENT GROUP INFORMATION

CCOE INFORMATION . . . (DECIMAL) . .
 REQUESTED CODE . . . 1003
 CONTAINED . . .

ELEMENT DEFINITION

ELEMENT TYPE (APAR11) 1. . . 4
 EC-1: TRIAXIAL ELEMENTS
 EC-2: 2-DIP ELEMENTS
 EC-3: 3-DIP ELEMENTS
 EC-4: BEAM ELEMENTS

NUMBER OF ELEMENTS (APAR12) 1. . . 1
 TYPE OF ANALYSIS (APAR13) 1. . . 1
 EC-1: MATERIAL ELASTICITY
 EC-2: MATERIAL ELASTICITY ONLY
 EC-3: TOTAL LAGRANGIAN FORMULATION

ELEMENT BIRTH AND DEATH OPTIONS (NPAR14) 1. . . 0
 EC-1: OPTICAL ACTIVE
 EC-2: BIRTH OPTION ACTIVE
 EC-3: DEATH OPTION ACTIVE

ELEMENT TYPE CODE (NPAR15) 1. . . 1
 EC-1: IN PLANE BEAM
 EC-2: GENERAL 3-D BEAM

INTEGRATION CODE IN 'R' DIRECTION . . . (APAR19) 1. . . 5

INTEGRATION CODE IN 'S' DIRECTION . . . (NPAR10) 1. . . 5

INTEGRATION CODE IN 'T' DIRECTION . . . (APAR11) 1. . . 5

NUMBER OF STRESS OUTPUT TABLES . . . (APAR13) 1. . . 0
 EC-1: PRINT AT ALL INTEGRATION POINTS

MAXIMUM NUMBER OF STRESS OUTPUT LOCATIONS
 IN TABLE (NPAR14) 1. . . 16

MATERIAL DEFINITION

MATERIAL MODEL (NPAR15) 1. . . 2
 EC-1: ELASTIC-ELASTIC
 EC-2: ELASTIC-PLASTIC

NUMBER OF DIFFERENT SETS OF MATERIAL
 CONSTANTS (NPAR16) 1. . . 1

NUMBER OF MATERIAL CONSTANTS PER SET . . . (NPAR17) 1. . . 6

SECTION DEFINITION

TYPE ICS ISWEAR DEN

FILE: ACINA CUTFLT A NAVAL POSTGRADUATE SCHOOL

1 2 PIPE 0 0.10600+01

SECTION PROPERTY

TYPE	PROPI(1)=E	PROPI(2)=INU	PROPI(3)=DO	PROPI(4)=DI	PROPI(5)=SIGV	PROPI(6)=ET
1	0.12000+04	0.48000+00	0.38000+01	0.25000+01	0.12000+04	0.0

ELEMENT INFORMATION

N	II	JJ	NK	TYPE	IPS	KG	ETIME
1	1	2	3	1	1	1	0.

STORAGE CHECK FOR LEAD INPUT

CORE INFORMATION
REQUESTED COME... (DECIMAL)...
CONTAINED... 34

SYSTEM DATA

NUMBER OF EQUATIONS	...	...	...	...	...	(NEQ)	3
NUMBER OF MATRIX ELEMENTS	...	...	...	...	...	(NMK)	6
MAXIMUM HALF BANDWIDTH	...	...	...	...	...	(MA)	3
MEAN HALF BANDWIDTH	...	...	...	...	...	(MAM)	3
MAXIMUM BLOCK LENGTH	...	...	...	...	...	(LSTOM)	6
NUMBER OF BLOCKS	...	...	...	...	...	(NBLOCK)	1

NUMBER OF COLUMNS PER BLOCK AND 1ST COUPLING BLOCK
NUMBER OF COLUMNS PER BLOCK
NUMBER OF COLUMNS PER BLOCK
FIRST COUPLING BLOCK

POSTORAGE CHECK FOR ASSEMBLAGE OF LINEAR MATRICES

CORE INFORMATION
REQUESTED COME... (DECIMAL)...
CONTAINED... 1070

POSTORAGE CHECK FOR LOAD VECTORS INPUT PHASE

CORE INFORMATION
REQUESTED COME... (DECIMAL)...
CONTAINED... 34

LOCAL DATA

LOAD FUNCTION NUMBER - 1

FILE: ACINA OUTPUT A NAVAL POSTGRADUATE SCHOOL

NUMBER OF TIME POINTS = 2

TIME VALUE FLACTION

0.0 0.7350E+00
1.00000 0.7350E+00

LCAG FUNCTION NUMBER = 3
NUMBER OF TIME POINTS = 3

TIME VALUE FLACTION

0.0 0.1047E+03
1.00000 0.1047E+03

CONCENTRATED LOADS

NODE	DIRECTION	LOAD CURVE	LOAD CURVE MULTIPL
6	1	1	0.1000E+01

000STORAGE CHECK FOR TIME INTEGRATION PHASE

CCRE INFORMATION... (DEC1991)..
REQUIRED CCRE...
OBTAINED...

INITIAL CONDITIONS

DISPLACEMENTS

NODE	X-DISPLACEMENT	Y-DISPLACEMENT	Z-DISPLACEMENT	X-ROTATION	Y-ROTATION	Z-ROTATION
1	0.0	0.0	0.0	0.0	0.0	0.0
2	0.0	0.0	0.0	0.0	0.0	0.0
3	0.0	0.0	0.0	0.0	0.0	0.0

(AT TIME 0.1000E+00)

APPIAT CUT FOR TIME STEP 1

1 EQUILIBRIUM ITERATIONS PERFORMED IN THIS TIME STEP TO REESTABLISH EQUILIBRIUM
STIFFNESS PERFORMED FOR THIS TIME STEP

DISPLACEMENTS

NODE	X-DISPLACEMENT	Y-DISPLACEMENT	Z-DISPLACEMENT	X-ROTATION	Y-ROTATION	Z-ROTATION
1	0.0	0.0	0.0	0.0	0.0	0.0
2	0.0	0.0	0.0	0.0	0.0	0.0
3	0.0	0.0	0.0	0.0	0.0	0.0

(AT TIME 0.1000E+00)

STRESS CALCULATIONS FOR ELEMENT GROUP 1 (BEAMS)

ELEMENT	STRESS LOCATION	SIGMA-R	TAU-RS	TAU-RY
1	1	0.2000E+03	0.0	0.0
2	1	0.2000E+03	0.0	0.0
3	1	0.2000E+03	0.0	0.0

[illegible][illegible][illegible][illegible]

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 104

6. 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840.

A standard linear barcode consisting of vertical black bars of varying widths on a white background. The bars are arranged horizontally across the page.

.....

.....

[illegible][illegible]

=====

1 AT TIME 0-20000-00 ,

1. SCULPIN IRRADIATIONS PERFORMED IN THIS TIME STEP TO REESTABLISH EQUILIBRIUM STIFFNESS REQUIRED FOR THIS TIME STEP

DISPLACEMENTS

MODE

DISPLACEMENT
0-0
0-2967020-00
0-2

DIS PLACEMENT
J. 2 0000 7D-01
J. 2 0000 7D-01


DISPLACEMENT

X-ROTATION

Y-ROTATION

00-210079D-01
Z-ROTATION

| STRESS CALCULATIONS FOR ELEMENT GROUP 1 (BEAMS) | |
|---|-----------------|
| ELEMENT N | STRESS LOCATION |
| SIGNA-R | TAU-RS |
| SIGNA-T | TAU-TT |



[illegible]

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 104

အလုပ်ကိုင်ခွင့်ရရှိသူများ၏ အသက်အရွယ်

.....

.....

[illegible][illegible]

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 104

575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

[illegible]

██████████

FCR PROBLEM

| | | |
|---|-------|-----|
| INPUT PHASE | | 0.0 |
| ASSEMBLAGE OF LINEAR STIFFNESS, EFFECTIVE STIFFNESS, MASS MATRICES AND LOAD VECTORS | | 0.0 |
| FREQUENCY ANALYSIS | | 0.0 |
| TRIANGULARIZATION OF LINEAR (EFFECTIVE) STIFFNESS MATRIX | | 0.0 |

FILE: ACINA OUTPUT A NAVAL POSTGRADUATE SCHOOL

STEP-BY-STEP SOLUTION (2 TIME STEPS)

| | |
|---------------------------------------|-----|
| CALCULATION OF EFFECTIVE LOAD VECTORS | 0.0 |
| UPDATING EFFECTIVE STIFFNESS MATRICES | 0.0 |
| CALCULATION OF NONLINEARITIES | 0.0 |
| UPDATING STIFFNESS MATRICES | 0.0 |
| SOLUTION OF EQUATIONS | 0.0 |
| CALCULATION OF DISPLACEMENTS | 0.0 |
| CALCULATION OF STRESSES | 0.0 |
| CALCULATION AND PRINTING OF STRESSES | 0.0 |

STEP-BY-STEP TOTAL 0.0

TOTAL SOLUTION TIME (SEC) . . . 0.0

APPENDIX G

TABULATED DATA

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | <u>α_m</u> | <u>α_A</u> |
|------------|------------|----------------|----------------|----------------------------|------------------|----------------------|----------------------|
| 1.1 | .5 | 16.38 | .422 | .421 | 6.9 | 3.0 | .6 |
| | | | .671 | .669 | 10.99 | 3.5 | .8 |
| | | | .922 | .91 | 15.1 | 4.2 | 1.3 |
| | | | 1.171 | 1.17 | 19.18 | 5.0 | 1.6 |
| | | | 1.421 | 1.42 | 23.27 | 6.0 | 2.0 |
| | | | 1.64 | 1.63 | 26.86 | 7.0 | 2.1 |
| | | | 1.87 | 1.85 | 30.62 | 10.0 | 2.6 |
| | | | 2.12 | 2.07 | 34.715 | 13.0 | 2.8 |
| 1.1 | 1.0 | 17.75 | .422 | .421 | 7.49 | 2.5 | 1.5 |
| | | | .671 | .668 | 11.91 | 5.0 | 2.0 |
| | | | .922 | .917 | 16.366 | 6.0 | 3.0 |
| | | | 1.171 | 1.161 | 20.785 | 7.5 | 3.4 |
| | | | 1.421 | 1.41 | 25.22 | 8.5 | 4.1 |
| | | | 1.671 | 1.64 | 29.66 | 10.5 | 4.8 |
| | | | 1.921 | 1.87 | 34.1 | 13.0 | 5.7 |
| 1.1 | 2.0 | 20.5 | .422 | .421 | 8.651 | 3.0 | 2.89 |
| | | | .671 | .668 | 13.756 | 5.5 | 5.9 |
| | | | .913 | .91 | 18.88 | 7.5 | 4.9 |
| | | | 1.15 | 1.149 | 24.01 | 11.0 | 8.9 |
| | | | 1.382 | 1.38 | 29.13 | 13.5 | 10.1 |
| | | | 1.614 | 1.6 | 34.256 | 15.0 | 12.4 |

Experimental Test Results
(1 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S(in.)</u> | <u>F(lb.)</u> | <u>F_s(lb.)</u> | <u>M(in-lb)</u> | <u>α_n</u> | <u>α_A</u> |
|------------|------------|---------------|---------------|---------------------------|-----------------|------------------------------|------------------------------|
| 1.2 | .5 | 16.5 | .422 | .421 | 6.963 | .23 | .25 |
| | | | .672 | .672 | -1.088 | .5 | .405 |
| | | | .922 | .92 | 15.213 | .5 | .556 |
| | | | 1.172 | 1.17 | 19.338 | .75 | .707 |
| | | | 1.422 | 1.4 | 23.463 | 1.0 | .845 |
| | | | 1.672 | 1.67 | 27.571 | 1.5 | 1.01 |
| | | | 1.922 | 1.92 | 31.697 | 2.0 | 1.159 |
| | | | 2.172 | 2.17 | 35.805 | 2.3 | 1.31 |
| | | | 2.422 | 2.42 | 39.93 | 2.5 | 1.46 |
| | | | 2.672 | 2.667 | 44.006 | 3.5 | 1.61 |
| | | | 2.922 | 2.913 | 48.065 | 4.5 | 1.76 |
| | | | 3.172 | 3.16 | 52.14 | 5.0 | 1.91 |
| | | | 3.422 | 3.403 | 56.150 | 6.0 | 2.05 |
| | | | 3.672 | 3.645 | 60.143 | 7.0 | 2.2 |
| | | | 3.922 | 3.888 | 64.152 | 7.5 | 2.35 |
| | | | 4.172 | 4.126 | 68.079 | 8.5 | 2.49 |
| | | | 4.422 | 4.365 | 72.023 | 9.2 | 2.63 |
| | | | 4.672 | 4.601 | 75.917 | 10.0 | 2.78 |
| | | | 4.922 | 4.832 | 79.728 | 11.0 | 2.92 |
| | | | 5.172 | 5.059 | 83.474 | 12.0 | 3.05 |
| | | | 5.422 | 5.272 | 86.988 | 13.5 | 3.18 |
| | | | 5.672 | 5.504 | 90.816 | 14.0 | 3.32 |
| | | | 5.922 | 5.720 | 94.38 | 15.0 | 3.45 |
| | | | 6.172 | 5.917 | 97.631 | 16.5 | 3.57 |
| | | | 6.422 | 6.135 | 101.228 | 17.2 | 3.7 |
| | | | 6.672 | 6.345 | 104.693 | 18.0 | 3.83 |

Experimental Test Results
(2 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α'_M | α'_A |
|------------|------------|----------------|----------------|----------------------------|------------------|-------------|-------------|
| 1.2 | .5 | 16.5 | 6.922 | 6.545 | 107.993 | 19.0 | 3.95 |
| | | | 7.172 | 6.718 | 110.847 | 20.5 | 4.05 |
| | | | 7.422 | 6.857 | 113.141 | 22.5 | 4.14 |
| | | | 7.672 | 7.062 | 116.523 | 23.0 | 4.26 |
| | | | 7.922 | 7.253 | 119.675 | 23.7 | 4.38 |
| | | | 8.172 | 7.436 | 122.694 | 24.5 | 4.49 |
| | | | 8.422 | 7.602 | 125.433 | 25.5 | 4.59 |
| | | | 8.672 | 7.727 | 127.496 | 27.0 | 4.66 |
| | | | 8.922 | 7.687 | 126.836 | 30.5 | 4.64 |
| | | | 9.172 | 7.778 | 128.337 | 32.0 | 4.69 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α'_M | α'_A |
|------------|------------|----------------|----------------|----------------------------|------------------|-------------|-------------|
| 1.2 | 1.0 | 18.0 | .422 | .42 | 7.596 | 0.0 | .5 |
| | | | .672 | .67 | 12.096 | .5 | .9 |
| | | | .922 | .92 | 16.596 | 1.0 | 1.25 |
| | | | 1.172 | 1.17 | 21.096 | 1.5 | 1.59 |
| | | | 1.422 | 1.42 | 25.596 | 2.0 | 1.94 |
| | | | 1.672 | 1.67 | 30.096 | 2.5 | 2.3 |
| | | | 1.922 | 1.927 | 34.596 | 3.5 | 2.7 |
| | | | 2.172 | 2.1667 | 39.091 | 4.0 | 2.96 |

Experimental Test Results
(3 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_M° | α_M° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.2 | 1.0 | 18.0 | 2.422 | 2.412 | 43.596 | 5.0 | 3.31 |
| | | | 2.672 | 2.657 | 48.096 | 6.0 | 3.65 |
| | | | 2.922 | 2.9 | 52.596 | 7.0 | 3.99 |
| | | | 3.172 | 3.141 | 57.096 | 8.0 | 4.33 |
| | | | 3.422 | 3.379 | 61.596 | 9.0 | 4.67 |
| | | | 3.672 | 3.61 | 66.096 | 10.5 | 5.01 |
| | | | 3.922 | 3.829 | 70.596 | 12.5 | 5.35 |
| | | | 4.172 | 4.056 | 75.096 | 13.5 | 5.69 |
| | | | 4.422 | 4.281 | 79.596 | 14.5 | 6.03 |
| | | | 4.672 | 4.491 | 84.096 | 16.0 | 6.44 |
| | | | 4.922 | 4.681 | 88.596 | 18.0 | 6.72 |
| | | | 5.172 | 4.875 | 93.096 | 19.5 | 7.06 |
| | | | 5.422 | 4.991 | 97.596 | 23.0 | 7.39 |
| | | | 5.672 | 5.141 | 102.096 | 25.0 | 7.74 |
| | | | 5.922 | 5.323 | 106.596 | 26.0 | 8.08 |
| | | | 6.172 | 5.449 | 111.096 | 28.0 | 8.42 |
| | | | 6.422 | 5.589 | 115.596 | 29.5 | 8.76 |
| | | | 6.672 | 5.658 | 120.096 | 32.0 | 9.1 |
| | | | 6.922 | 5.671 | 124.596 | 35.0 | 9.44 |

Experimental Test Results
(4 of 16)

| <u>D/d</u> | <u>L/d</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb.) | α_N° | α_A° |
|------------|------------|----------------|----------------|----------------------------|-------------------|------------------|------------------|
| 1.2 | 2.0 | 21.0 | .422 | .42 | 8.862 | .5 | 1.3 |
| | | | .672 | .67 | 14.112 | 1.0 | 2.23 |
| | | | .922 | .92 | 19.36 | 2.5 | 3.09 |
| | | | 1.171 | 1.71 | 24.61 | 3.0 | 3.93 |
| | | | 1.422 | 1.419 | 29.86 | 3.5 | 4.77 |
| | | | 1.672 | 1.666 | 35.11 | 5.0 | 5.61 |
| | | | 1.922 | 1.91 | 40.36 | 6.5 | 6.45 |
| | | | 2.172 | 2.15 | 45.61 | 8.0 | 7.28 |
| | | | 2.422 | 2.37 | 50.86 | 10.0 | 8.11 |
| | | | 2.672 | 2.614 | 56.11 | 12.0 | 8.96 |
| | | | 2.922 | 2.801 | 61.36 | 14.5 | 9.76 |
| | | | 3.172 | 3.04 | 66.61 | 16.5 | 10.6 |
| | | | 3.422 | 3.226 | 71.86 | 19.5 | 11.4 |
| | | | 3.672 | 3.33 | 77.11 | 22.5 | 12.19 |
| | | | 3.922 | 3.55 | 82.36 | 25.0 | 13.02 |
| | | | 4.172 | 3.72 | 87.61 | 27.0 | 13.82 |
| | | | 4.422 | 3.83 | 92.86 | 30.0 | 14.6 |
| | | | 4.672 | 3.896 | 98.11 | 33.5 | 15.4 |
| | | | 4.922 | 3.98 | 103.36 | 36.0 | 16.62 |

Experimental Test Results
(5 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α'_w | α'_A |
|------------|------------|----------------|----------------|----------------------------|------------------|-------------|-------------|
| 1.26 | .5 | 17.28 | .422 | .42 | 7.292 | 0 | .2 |
| | | | .672 | .67 | 11.612 | 1.0 | .32 |
| | | | .922 | .92 | 15.932 | 1.0 | .44 |
| | | | 1.172 | 1.171 | 20.252 | 2.0 | .6 |
| | | | 1.422 | 1.42 | 24.572 | 2.0 | .67 |
| | | | 1.672 | 1.67 | 28.892 | 2.5 | .8 |
| | | | 1.922 | 1.92 | 33.212 | 2.5 | .9 |
| | | | 2.172 | 2.169 | 37.532 | 3.0 | 1.02 |
| | | | 2.422 | 2.419 | 41.852 | 3.0 | 1.14 |
| | | | 2.672 | 2.669 | 46.172 | 4.0 | 1.3 |
| | | | 2.922 | 2.913 | 50.492 | 4.5 | 1.4 |
| | | | 3.172 | 3.16 | 54.812 | 5.0 | 1.5 |
| | | | 3.422 | 3.409 | 59.132 | 5.0 | 1.6 |
| | | | 3.672 | 3.652 | 63.452 | 6.0 | 1.7 |
| | | | 3.922 | 3.901 | 67.772 | 6.0 | 1.8 |
| | | | 4.172 | 4.145 | 72.092 | 6.5 | 1.96 |
| | | | 4.422 | 4.389 | 76.412 | 7.0 | 2.08 |
| | | | 4.672 | 4.632 | 80.732 | 7.5 | 2.2 |
| | | | 4.922 | 4.874 | 85.052 | 8.0 | 2.3 |

Experimental Test Results
(6 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α_M° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | .5 | 17.28 | 5.172 | 5.115 | 89.372 | 8.5 | 2.4 |
| | | | 5.422 | 5.355 | 93.692 | 9.0 | 2.5 |
| | | | 5.672 | 5.594 | 98.012 | 9.5 | 2.6 |
| | | | 5.922 | 5.823 | 102.332 | 10.5 | 2.7 |
| | | | 6.172 | 6.048 | 106.652 | 11.5 | 2.8 |
| | | | 6.422 | 6.282 | 110.972 | 12.0 | 2.9 |
| | | | 6.672 | 6.514 | 115.292 | 12.5 | 3.0 |
| | | | 6.922 | 6.745 | 119.612 | 13.0 | 3.1 |
| | | | 7.172 | 6.959 | 123.923 | 14.0 | 3.3 |
| | | | 7.422 | 7.186 | 128.252 | 14.5 | 3.5 |
| | | | 7.672 | 7.411 | 132.572 | 15.0 | 3.6 |
| | | | 7.922 | 7.634 | 136.892 | 15.5 | 3.7 |
| | | | 8.172 | 7.855 | 141.212 | 16.0 | 3.8 |
| | | | 8.422 | 8.075 | 145.532 | 16.5 | 4.0 |
| | | | 8.672 | 8.293 | 149.852 | 17.0 | 4.1 |
| | | | 8.922 | 8.485 | 154.172 | 18.0 | 4.3 |
| | | | 9.172 | 8.698 | 158.492 | 18.5 | 4.4 |
| | | | 9.422 | 8.909 | 162.812 | 19.0 | 4.45 |
| | | | 9.672 | 9.117 | 167.132 | 19.5 | 4.5 |

Experimental Test Results
(7 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_H° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | .5 | 17.28 | 9.922 | 9.324 | 171.452 | 20.0 | 4.65 |
| | | | 10.172 | 9.528 | 175.772 | 20.5 | 4.7 |
| | | | 10.422 | 9.679 | 180.092 | 21.5 | 4.75 |
| | | | 10.672 | 9.985 | 184.412 | 22.0 | 4.8 |
| | | | 10.922 | 10.091 | 188.732 | 22.5 | 4.9 |
| | | | 11.172 | 10.284 | 193.052 | 23.0 | 5.1 |
| | | | 11.422 | 10.435 | 197.372 | 24.0 | 5.2 |
| | | | 11.672 | 10.671 | 201.692 | 24.5 | 5.3 |
| | | | 11.922 | 10.805 | 206.012 | 25 | 5.5 |
| | | | 12.172 | 10.94 | 210.332 | 26.0 | 5.8 |
| | | | 12.422 | 11.117 | 214.652 | 26.5 | 5.9 |
| | | | 12.672 | 11.291 | 218.972 | 27.0 | 6.0 |
| | | | 12.922 | 11.462 | 223.292 | 27.5 | 6.04 |
| | | | 13.172 | 11.63 | 227.612 | 28.0 | 6.16 |
| | | | 13.422 | 11.739 | 231.932 | 29.0 | 6.28 |
| | | | 13.672 | 11.9 | 236.251 | 29.5 | 6.39 |
| | | | 13.922 | 12.057 | 240.572 | 30.0 | 6.51 |
| | | | 14.172 | 12.148 | 244.892 | 31.0 | 6.62 |
| | | | 14.422 | 12.297 | 249.212 | 31.5 | 6.74 |
| | | | 14.672 | 12.442 | 253.532 | 32.0 | 6.85 |

Experimental Test Results
(8 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α_M° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | .5 | 17.28 | 14.922 | 12.585 | 257.852 | 32.5 | 6.97 |
| | | | 15.172 | 12.652 | 262.172 | 33.5 | 7.08 |
| | | | 15.422 | 12.785 | 266.492 | 34.0 | 7.2 |
| | | | 15.672 | 12.916 | 270.812 | 34.5 | 7.31 |
| | | | 15.922 | 12.632 | 275.132 | 37.5 | 7.42 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α_M° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | 1.0 | 18.85 | .422 | .42 | 7.957 | 1.0 | .5 |
| | | | .672 | .67 | 12.667 | 1.5 | .7 |
| | | | .922 | .92 | 17.38 | 2.0 | 1.0 |
| | | | 1.172 | 1.171 | 22.092 | 2.5 | 1.3 |
| | | | 1.422 | 1.42 | 26.805 | 2.5 | 1.5 |
| | | | 1.672 | 1.67 | 31.517 | 3.0 | 1.8 |
| | | | 1.922 | 1.919 | 36.23 | 3.0 | 2.04 |
| | | | 2.172 | 2.168 | 40.942 | 3.5 | 2.31 |
| | | | 2.422 | 2.416 | 45.655 | 4.0 | 2.6 |
| | | | 2.672 | 2.665 | 50.367 | 4.0 | 2.9 |
| | | | 2.922 | 2.913 | 55.080 | 4.5 | 3.11 |
| | | | 3.172 | 3.16 | 59.792 | 5.0 | 3.4 |

Experimental Test Results
(9 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_w° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | 1.0 | 18.85 | 3.422 | 3.403 | 64.505 | 6.0 | 3.7 |
| | | | 3.672 | 3.645 | 69.217 | 7.0 | 3.9 |
| | | | 3.922 | 3.893 | 73.930 | 7.0 | 4.2 |
| | | | 4.172 | 4.131 | 78.642 | 8.0 | 4.4 |
| | | | 4.422 | 4.379 | 83.355 | 8.0 | 4.7 |
| | | | 4.672 | 4.621 | 88.067 | 8.5 | 5.0 |
| | | | 4.922 | 4.861 | 92.78 | 9.0 | 5.3 |
| | | | 5.172 | 5.093 | 97.492 | 10.0 | 5.5 |
| | | | 5.422 | 5.331 | 102.205 | 10.5 | 5.8 |
| | | | 5.672 | 5.568 | 106.917 | 11.0 | 6.1 |
| | | | 5.922 | 5.793 | 111.63 | 12.0 | 6.6 |
| | | | 6.172 | 5.989 | 116.342 | 14.0 | 6.6 |
| | | | 6.422 | 6.203 | 121.055 | 15.0 | 7.0 |
| | | | 6.672 | 6.429 | 125.767 | 15.5 | 7.1 |
| | | | 6.922 | 6.62 | 130.48 | 17.0 | 7.4 |
| | | | 7.172 | 6.84 | 135.192 | 17.5 | 7.7 |
| | | | 7.422 | 7.059 | 139.905 | 18.0 | 7.9 |
| | | | 7.672 | 7.254 | 144.617 | 19.0 | 8.1 |
| | | | 7.922 | 7.468 | 149.33 | 19.5 | 8.4 |
| | | | 8.172 | 7.654 | 154.042 | 20.5 | 8.7 |

Experimental Test Results
(10 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_M° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | 1.0 | 18.85 | 8.422 | 7.781 | 158.755 | 22.5 | 8.9 |
| | | | 8.672 | 8.012 | 163.463 | 22.5 | 9.2 |
| | | | 9.172 | 8.411 | 172.892 | 23.5 | 9.7 |
| | | | 9.422 | 8.574 | 177.605 | 24.5 | 9.9 |
| | | | 9.672 | 8.73 | 182.317 | 25.5 | 10.2 |
| | | | 9.922 | 8.918 | 187.03 | 26.0 | 10.5 |
| | | | 10.172 | 9.023 | 191.742 | 27.5 | 10.7 |
| | | | 10.422 | 9.159 | 196.455 | 28.5 | 10.9 |
| | | | 10.672 | 9.195 | 201.167 | 30.5 | 11.2 |
| | | | 10.922 | 9.262 | 205.88 | 32.0 | 11.5 |
| | | | 11.172 | 9.474 | 210.592 | 32.0 | 11.7 |
| | | | 11.422 | 9.633 | 215.305 | 32.5 | 12.0 |
| | | | 11.672 | 9.789 | 220.017 | 33.0 | 12.3 |
| | | | 11.922 | 9.766 | 224.73 | 35.0 | 12.5 |
| | | | 12.172 | 9.785 | 229.442 | 36.5 | 12.8 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_M° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | 2.0 | 22.0 | .422 | .42 | 9.284 | 1.0 | 1.7 |
| | | | .672 | .67 | 14.784 | 1.5 | 1.8 |
| | | | .922 | .92 | 20.262 | 2.0 | 2.4 |

Experimental Test Results
(11 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | <u>α_M</u> [°] | <u>α_A</u> [°] |
|------------|------------|----------------|----------------|----------------------------|------------------|-----------------------------------|-----------------------------------|
| 1.26 | 2.0 | 22.0 | 1.172 | 1.71 | 25.762 | 2.5 | 3.06 |
| | | | 1.422 | 1.42 | 31.284 | 3.0 | 3.7 |
| | | | 1.672 | 1.67 | 36.784 | 3.5 | 4.3 |
| | | | 1.922 | 1.917 | 42.284 | 4.0 | 5.03 |
| | | | 2.172 | 2.163 | 47.784 | 5.0 | 5.7 |
| | | | 2.422 | 2.408 | 53.284 | 6.0 | 6.33 |
| | | | 2.672 | 2.655 | 58.784 | 6.5 | 6.98 |
| | | | 2.922 | 2.9 | 64.284 | 7.0 | 7.64 |
| | | | 3.172 | 3.145 | 69.784 | 7.5 | 8.29 |
| | | | 3.422 | 3.384 | 75.283 | 8.5 | 8.95 |
| | | | 3.672 | 3.627 | 80.784 | 9.0 | 9.59 |
| | | | 3.922 | 3.849 | 86.284 | 11.0 | 10.5 |
| | | | 4.172 | 4.081 | 91.784 | 12.0 | 10.9 |
| | | | 4.422 | 4.299 | 97.284 | 13.5 | 11.5 |
| | | | 4.672 | 4.513 | 102.784 | 15.0 | 12.2 |
| | | | 4.922 | 4.731 | 108.284 | 16.0 | 12.8 |
| | | | 5.172 | 4.933 | 113.784 | 17.5 | 13.5 |
| | | | 5.422 | 5.142 | 119.284 | 18.5 | 14.1 |
| | | | 5.672 | 5.329 | 124.784 | 20.0 | 14.7 |
| | | | 5.922 | 5.509 | 130.284 | 21.5 | 15.4 |

Experimental Test Results
(12 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α_M° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.26 | 2.0 | -2.0 | 6.172 | 5.681 | 135.784 | 23.0 | 16.0 |
| | | | 6.422 | 5.82 | 141.284 | 25.0 | 16.6 |
| | | | 6.672 | 5.997 | 146.784 | 26.0 | 17.3 |
| | | | 6.922 | 6.139 | 152.284 | 27.5 | 17.9 |
| | | | 7.172 | 6.273 | 157.784 | 29.0 | 18.5 |
| | | | 7.422 | 6.395 | 163.284 | 30.5 | 19.1 |
| | | | 7.672 | 6.434 | 168.784 | 33.0 | 19.6 |
| | | | 7.922 | 6.489 | 174.284 | 35.0 | 20.3 |
| | | | 8.172 | 6.439 | 179.784 | 38.0 | 20.8 |
| | | | 8.422 | 5.743 | 185.284 | 47.0 | 21.2 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (in.) | <u>F_S</u> (in.) | <u>M</u> (in-lb) | α_M° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.34 | .5 | 89.33 | .376 | .376 | 34.08 | 0.0 | .7 |
| | | | 1.12 | 1.116 | 139.92 | 5.0 | 2.7 |
| | | | 1.3 | 1.278 | 198.84 | 10.5 | 3.8 |
| | | | 1.3 | 1.25 | 240.24 | 16.0 | 4.6 |
| | | | 1.49 | 1.382 | 300.96 | 22.0 | 5.7 |
| | | | 1.68 | 1.483 | 359.88 | 28.0 | 6.86 |
| | | | 1.86 | 1.594 | 416.4 | 34.0 | 7.9 |
| | | | 1.86 | 1.425 | 453.480 | 40.0 | 8.6 |

Experimental Test Results
(13 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α_m° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.34 | .5 | 89.33 | 1.86 | 1.257 | 495.360 | 47.5 | 9.4 |
| | | | 2.1 | 1.159 | 555.120 | 56.5 | 10.6 |
| | | | 2.42 | .965 | 625.56 | 66.5 | 11.9 |
| | | | 2.42 | .626 | 647.28 | 75.0 | 12.4 |
| | | | 2.42 | .211 | 660.6 | 85.0 | 12.56 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α_m° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.34 | 1.0 | 91.0 | | .375 | 61.44 | 3.5 | 2.4 |
| | | | | .559 | 93.84 | 5.5 | 3.6 |
| | | | | .909 | 184.80 | 13.0 | 7.1 |
| | | | | 1.05 | 254.4 | 20.0 | 9.7 |
| | | | | 1.137 | 334.8 | 29.0 | 12.8 |
| | | | | .917 | 374.52 | 35.0 | 14.3 |
| | | | | .958 | 422.76 | 43.0 | 16.2 |
| | | | | .928 | 484.560 | 51.5 | 18.5 |
| | | | | .734 | 523.680 | 60.0 | 20.0 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_S</u> (lb.) | <u>M</u> (in-lb) | α_m° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.34 | .5 | 94.0 | | .368 | 112.30 | 4.0 | 9.5 |
| | | | | .924 | 151.8 | 8.0 | 11.7 |
| | | | | 1.082 | 226.440 | 15.0 | 17.5 |
| | | | | .868 | 256.44 | 21.5 | 19.8 |
| | | | | .647 | 300.600 | 30.0 | 23.04 |
| | | | | .134 | 343.56 | 45.0 | 26.17 |

Experimental Test Results
(14 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_H° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.52 | .5 | 91.0 | .747 | .74 | 106.66 | 5.0 | 1.3 |
| | | | 1.490 | 1.474 | 201.498 | 8.5 | 2.3 |
| | | | 2.047 | 1.968 | 309.184 | 16.0 | 3.5 |
| | | | 2.604 | 2.439 | 393.121 | 20.5 | 4.4 |
| | | | 2.790 | 2.475 | 459.784 | 27.5 | 5.2 |
| | | | 3.347 | 2.691 | 569.80 | 36.5 | 6.4 |
| | | | 3.533 | 2.584 | 625.7 | 43.0 | 7.1 |
| | | | 3.533 | 2.271 | 663.8 | 50.0 | 7.5 |
| | | | 4.647 | 2.393 | 805.0 | 59.0 | 9.1 |
| | | | 5.019 | 1.880 | 870.0 | 68.0 | 9.8 |
| | | | 6.690 | .408 | 1053.0 | 86.5 | 11.8 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_H° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.52 | 1.0 | 93.0 | .376 | .373 | 86.55 | 6.5 | 2.0 |
| | | | 1.119 | 1.098 | 191.01 | 11.0 | 4.4 |
| | | | 1.490 | 1.440 | 256.51 | 15.0 | 5.8 |
| | | | 1.862 | 1.749 | 329.07 | 20.0 | 7.5 |
| | | | 2.233 | 1.990 | 411.00 | 26.5 | 9.3 |
| | | | 2.233 | 2.11 | 432.01 | 29.5 | 9.8 |
| | | | 2.419 | 1.95 | 496.0 | 36.5 | 11.2 |
| | | | 2.976 | 2.176 | 587.55 | 43.0 | 13.3 |

Experimental Test Results
(15 of 16)

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_H° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.52 | 1.0 | 93.0 | 3.162 | 2.03 | 643.19 | 50.0 | 14.5 |
| | | | 3.719 | 2.02 | 728.0 | 57.0 | 16.4 |
| | | | 4.09 | 1.73 | 793.0 | 65.0 | 17.9 |
| | | | 4.647 | 1.28 | 870.0 | 74.0 | 20.0 |

| <u>D/d</u> | <u>L/D</u> | <u>S</u> (in.) | <u>F</u> (lb.) | <u>F_s</u> (lb.) | <u>M</u> (in-lb) | α_H° | α_A° |
|------------|------------|----------------|----------------|----------------------------|------------------|------------------|------------------|
| 1.52 | 2.0 | 97.0 | .433 | .40 | 62.0 | 7.5 | 3.0 |
| | | | 1.304 | 1.286 | 233.95 | 13.5 | 10.7 |
| | | | 1.304 | 1.233 | 274.34 | 19.0 | 12.5 |
| | | | 1.486 | 1.358 | 325.05 | 24.0 | 15.0 |
| | | | 1.675 | 1.466 | 372.63 | 29.0 | 17.0 |
| | | | 1.861 | 1.477 | 432.61 | 37.5 | 20.0 |
| | | | 1.865 | 1.316 | 463.74 | 45.0 | 21.0 |
| | | | 2.04 | 1.199 | 510.83 | 54.0 | 23.0 |
| | | | 2.418 | .945 | 550.18 | 67.0 | 25.0 |
| | | | 2.418 | .5496 | 695.49 | 76.0 | 32.0 |
| | | | 3.34 | .000 | 795.9 | 90.0 | 36.0 |

Experimental Test Results
(16 of 16)

Critical Values for σ

ADINA was used to evaluate the critical stresses in the model. Where the correlation between computer model and experimental model was good in the linear response range, critical stress was taken at 5, 10, and 15 degrees of rotation. Where correlation was poor only the critical stress at the first loading was taken.

| <u>D/d</u> | <u>L/D</u> | <u>σ_c (p.s.i.)</u> |
|------------|------------|---------------------------------------|
| 1.1 | .5 | 12.27 |
| | 1.0 | 21.27 |
| | 2.0 | 26.97 (5 degrees) |
| | | 46.93 (10 degrees) |
| | | 66.76 (15 degrees) |
| 1.2 | .5 | 5.565 |
| | 1.0 | 6.27 |
| | 2.0 | 33.047 (5 degrees) |
| | | 47.68 (10 degrees) |
| | | 59.57 (15 degrees) |
| 1.26 | .5 | 4.36 |
| | 1.0 | 4.798 |
| | 2.0 | 33.46 (5 degrees) |
| | | 56.63 (10 degrees) |
| | | 68.0 (15 degrees) |

| <u>D/d</u> | <u>L/D</u> | <u>c</u> (p.s.i.) |
|------------|------------|-------------------|
| 1.34 | .5 | 13.7 |
| | 1.0 | 24.96 |
| | 2.0 | 62.91 |
| 1.52 | .5 | 25.37 |
| | 1.0 | 20.65 |
| | 2.0 | 15.24 |

APPENDIX H
SAMPLE CALCULATION

I. Piling Size Selection

Assume 6" OD. Steel Pipe

II. Use Appendices B and C to extract environmental loads

Assume a 2 knot current

20 mile/hour wind

Assume 15 feet of water depth

12 feet of piling above water

9 sq. feet of Navigational Package Sail Area

From Appendices B and C

2 knot current acting on 6" pile = 54.41 lbf.

20 mile/hour wind acting on 6" pile = 3.65 lbf.

20 mile/hour wind acting on 9 sq. feet sail area
= 10.94 lbf.

III. Calculate Total Moment

a) 54.41 lbf x 7.5 ft. = 408.075 ft-lb

b) 3.65 lbf x 21 feet = 76.65 ft-lb

c) 10.94 lbf x 30 feet = 328.2 ft-lb

Total Moment 812.925 ft-lb = 9755.1 in-lb

IV. Using the critical value for σ

$\sigma_c = 68 \text{ p.s.i.}$ and $\sigma_c = \frac{MC}{I}$

Solving for D and d where $D = 1.26 d$ (the ratio for the desired snap-through action).

V. $D = 13.38$ inches

$d = 10.44$ inches

VI. Final Size

Using the 2-1 ratio L/D

$L = 26.76$ inches

$D = 13.38$ inches

$d = 10.44$

LIST OF REFERENCES

1. Department of Transportation, United States Coast Guard COMDTINST. M16500.3(OLD CG-222-2), Aids to Navigation Technical, September 1979.
2. Pilkey, Walter D. and Pilkey, Orrin H., Mechanics of Solids, QUATUM, 1974.
3. Vinson, Jack R., Structural Mechanics: The Behavior of Plates and Shells, John Wiley and Sons, 1974.
4. Streeter, Victor L. and Wylie, E. Benjamin, Fluid Mechanics, McGraw-Hill, 1979.
5. Schlichting, Dr. Hermann, Boundary-Layer Theory, McGraw-Hill, 1979.
6. Massachusetts Institute of Technology Report No. 82448-1, A Finite Element Program for Automatic Dynamic Incremental Nonlinear Analysis (ADINA), by K. Bathe, May 1976.
7. Kamel, Hussein A., and McCabe, Michael W., The GIFTS System, Graphics-oriented Interactive Finite Element Time-Sharing System, University of Arizona, 1981.

INITIAL DISTRIBUTION LIST

| | No. Copies |
|--|------------|
| 1. Defense Technical Information Center
Cameron Station
Alexandria, Virginia 22314 | 2 |
| 2. Library, Code 0142
Naval Postgraduate School
Monterey, California 93940 | 2 |
| 3. Department Chairman, Code 69Mx
Department of Mechanical Engineering
Naval Postgraduate School
Monterey, California 93940 | 1 |
| 4. Commandant (G-EOE)
United States Coast Guard
2100 2nd Street, S.W.
Washington, D.C. 20593 | 1 |
| 5. Commandant (G-PTE)
United States Coast Guard
2100 2nd Street, S.W.
Washington, D.C. 20593 | 1 |
| 6. LCDR Max R. Miller, Jr.
727 Parkwood Drive
Long Beach, Mississippi 39560 | 3 |