

AD-A127 759 STABLE VISCOSITY MATRICES FOR SYSTEMS OF CONSERVATION 1/1
LAWS(U) WISCONSIN UNIV-MADISON MATHEMATICS RESEARCH
CENTER A MAJDA ET AL. MAR 83 MRC-TSR-2491

1/1

1/1


1/1

1/1

1/1

1/1

END
DATE
FILMED
JUN 1964
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

ADA 127759

MRC Technical Summary Report #2491

STABLE VISCOSITY MATRICES FOR
SYSTEMS OF CONSERVATION LAWS

Andrew Majda and Robert Pego

Mathematics Research Center
University of Wisconsin-Madison
610 Walnut Street
Madison, Wisconsin 53706

March 1983

DTIC FILE COPY

(Received December 15, 1982)

Approved for public release
Distribution unlimited

DTIC
ELECTE
MAY 06 1983
S E D

Sponsored by

U. S. Army Research Office
P. O. Box 12211
Research Triangle Park
North Carolina 27709

National Science Foundation
Washington, DC 20550

88 05 06-128

UNIVERSITY OF WISCONSIN-MADISON
MATHEMATICS RESEARCH CENTER

STABLE VISCOSITY MATRICES FOR SYSTEMS OF CONSERVATION LAWS

Andrew Majda^{*,1,2}, and Robert Pego^{1,3}

Technical Summary Report #2491
March 1983

ABSTRACT

We study a natural class of appropriate viscosity matrices for strictly hyperbolic systems of conservation laws in one space dimension, $u_t + f(u)_x = 0$, $u \in \mathbb{R}^n$. These matrices are admissible in the sense that small amplitude shock wave solutions of the hyperbolic system are shown to be limits of smooth traveling wave solutions of the parabolic system $u_t + f(u)_x = v(Du_x)_x$ as $v \rightarrow 0$ if D is in this class. The class is determined by a linearized stability requirement: The Cauchy problem for the equation $u_t + f'(u_0)u_x = vDu_{xx}$ should be well posed in L^2 uniformly in v as $v \rightarrow 0$. Previous examples of inadmissible viscosity matrices are accounted for through violation of the stability criterion.

AMS (MOS) Subject Classifications: 35L65, 35L67, 35B99, 35K55

Key Words: Shock profiles, viscosity matrices, traveling waves, center manifold

Work Unit Number 1 (Applied Analysis)

*Department of Mathematics, University of California, Berkeley, CA 94720

¹Sponsored by the United States Army under Contract No. DAAG29-80-C-0041.

²Partially supported by the National Science Foundation Grant No. MCS-81-02360 and Army Research Office Grant No. 483964-25530.

³This material is based upon work supported by the National Science Foundation under Grant No. MCS-7927062, Mod. 2.

SIGNIFICANCE AND EXPLANATION

Many equations of mathematical physics take the form of nonlinear hyperbolic systems of conservation laws. With small dissipative effects neglected, typically smooth solutions must develop discontinuities (shocks in finite time. Reincorporating dissipation helps select those discontinuities which are physically meaningful. For this purpose, many different sorts of dissipation will do; in particular, the physical viscosity is typically degenerate and not convenient. In this paper we provide a thorough understanding of what sorts of second order viscosity terms smooth the physical discontinuities. A natural class of "admissible" viscosity terms is determined based on a simple linearized stability condition.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	



The responsibility for the wording and views expressed in this descriptive summary lies with MRC, and not with the authors of this report.

STABLE VISCOSITY MATRICES FOR SYSTEMS OF CONSERVATION LAWS

Andrew Majda^{*,1,2} and Robert Pego^{1,3}

§1. INTRODUCTION

The simplest discontinuous solutions of the $m \times m$ system of hyperbolic conservation laws

$$(1.1) \quad u_t + f(u)_x = 0, \quad u \in \mathbb{R}^m$$

are the shock wave solutions defined by

$$(1.2) \quad u(x,t) = \begin{cases} u_L & x < st \\ u_R & x > st \end{cases}$$

where u_L and u_R are constant vectors which together with the constant s satisfy the Rankine-Hugoniot conditions

$$(1.3) \quad -s(u_R - u_L) + f(u_R) - f(u_L) = 0$$

and a suitable strict entropy condition: Lax's shock inequalities in the genuinely nonlinear case (see (1.15) below), and Liu's strict condition (E) in the general case (see section 3).

We assume that the system (1.1) is strictly hyperbolic. Thus, if $A(u) = \partial f / \partial u$ is the $m \times m$ Jacobian matrix, $A(u)$ has m distinct real eigenvalues, ordered

$\lambda_1(u) < \lambda_2(u) < \dots < \lambda_m(u)$ with corresponding right and left eigenvectors $r_j(u)$ and $l_k(u)$ for $j, k = 1, \dots, m$, satisfying

$$(1.4) \quad \begin{aligned} A(u)r_j &= \lambda_j r_j & A^*(u)l_k &= \lambda_k l_k \\ l_k \cdot r_j &= \delta_{kj} \end{aligned}$$

An eigenvalue $\lambda_j(u)$ is called genuinely nonlinear if $\nabla \lambda_j \cdot r_j(u)$ never vanishes.

^{*}Department of Mathematics, University of California, Berkeley, CA 94720

¹Sponsored by the United States Army under Contract No. DAAG29-80-C-0041.

²Partially supported by National Science Foundation Grant No. MCS-81-02360 and Army Research Office Grant No. 483964-25530

³This material is based upon work supported by the National Science Foundation under Grant No. MCS-7927062, Mod 2.

In 1959 Gelfand introduced the following problem: Show that a discontinuous solution of the form (1.2) (so satisfying (1.3)) is the limit of special smooth solutions

$$u^v = u\left(\frac{x-st}{v}\right) \text{ of a reasonable parabolic system}$$

$$(1.5) \quad u_t^v + f(u^v)_x = v(D(u^v)u_x^v)_x \text{ as } v \rightarrow 0$$

if (and only if) the entropy condition is satisfied. In particular, one should determine the class of viscosity matrices $D(u)$ for which the above is true: such a matrix is called admissible. The smooth traveling wave solution $U\left(\frac{x-st}{v}\right)$ is called a viscous shock profile.

The existence of the traveling wave $U\left(\frac{x-st}{v}\right)$ having the desired limit (1.2) requires that, with $\xi = \frac{x-st}{v}$, $U(\xi)$ should satisfy the $m \times m$ system of nonlinear ODE's

$$(1.6) \quad D(U)U_\xi = -s(U - u_L) + f(U) - f(u_L)$$

for $-\infty < \xi < \infty$ together with the boundary conditions

$$(1.7) \quad \lim_{\xi \rightarrow -\infty} U(\xi) = u_L \quad \lim_{\xi \rightarrow \infty} U(\xi) = u_R$$

That is, the autonomous system of ODE's (1.6) should admit a trajectory connecting the critical point u_L on the left to the critical point u_R on the right.

Several authors have established sufficient conditions ensuring the existence of the connecting orbit for (1.6), (1.7) under various assumptions, typically including either $m = 2$ or $|u_L - u_R|$ small (weak shocks), and either genuine nonlinearity or $D(u) \equiv I$ (see [4], [1], [2], [3], [11]). A notable exception is Mock's more recent paper [12], which finds a broad class of matrices $D(u)$ admissible for general m and strong shocks, making global assumptions of genuine nonlinearity and the existence of a convex entropy function. On the other hand, Conley and Smoller [1] have discovered puzzling examples of constant positive definite matrices D which are inadmissible, so that for some family of shock waves the system of ODE's (1.6) fails to admit a trajectory satisfying (1.7). Moreover, these examples exist in a simple context, that arising when (1.1) represents the equations of isentropic gas dynamics

$$\begin{aligned}
 (1.8) \quad & \tau_t - v_x = 0 \\
 & v_t + p(\tau) = 0
 \end{aligned}$$

where one assumes that $p'(\tau) < 0$, $p''(\tau) > 0$. The system (1.8) is also called the p-system.

The natural requirement of parabolicity imposed by Gelfand on (1.5) means that the eigenvalues of $D(u_0)$ always have positive real parts. Equivalently, if $\kappa_j(\xi)$, $j = 1, \dots, m$, are the eigenvalues of the matrix symbol

$$(1.9) \quad P(\xi) = -i\xi A(u_0) - \xi^2 v D(u_0)$$

obtained from linearizing (1.5) at a constant state u_0 , then for some $\delta > 0$ depending on u_0 these eigenvalues satisfy

$$(1.10) \quad \operatorname{Re} \kappa_j(\xi) < -\delta |\xi|^2 \quad \text{for } |\xi| \text{ large, } j = 1, \dots, m.$$

Our central objective in this paper is to introduce a very natural algebraic requirement on the linearized system from (1.5) beyond the condition (1.10) - a condition on the viscosity matrix $D(u_0)$ we call strict stability. Given the concept of strict stability, the bulk of this paper (sections 2-4) is devoted to two goals: 1) To explain the examples of inadmissibility in [1], and link the mechanisms of inadmissibility with quantitative violation of the strict stability condition; 2) To elucidate the close relationship between strict stability and necessary and sufficient conditions for admissibility.

The requirement of strict stability is motivated by the following considerations. The main interest in the problem of finding viscous shock profiles as described in (1.5)-(1.7) is to investigate in a special case the limit as $v \rightarrow 0$ of solutions of (1.5). The constant states, u_0 , are special solutions of these diffusion equations. Linearization of (1.5) around the constant state u_0 yields the linear equation,

$$\begin{aligned}
 (1.11) \quad & v_t^v + A(u_0) v_x^v = v D(u_0) v_{xx}^v, \quad v > 0 \\
 & v^v(x, 0) = v_0(x)
 \end{aligned}$$

so that a natural minimum requirement for any viscosity matrix in (1.5) is that the

solution v^v of (1.11) converges to v^0 for any initial data v_0 . This is true for all $v_0(x) \in L^2(R)$ if and only if for any $T > 0$, there is a fixed constant $C(T)$ so that with $S^v(t)v_0 = v^v$,

$$(1.12) \quad \max_{\substack{0 < v < 1 \\ 0 < t < T}} \|S^v(t)v_0\|_{L^2} < C(T)\|v_0\|_{L^2}$$

That is, the initial value problem (1.11) is required to be uniformly well posed in L^2 as $v \rightarrow 0$. At any given value u_0 , there is a set of $m \times m$ matrices $D(u_0)$, the uniformly stable matrices, $S(u_0)$, guaranteeing (1.12). However, this set of matrices, $S(u_0)$, is a bit too large since the boundary of $S(u_0)$, $\partial S(u_0)$, includes $D \equiv 0$ as well as $m \times m$ matrices for which the solutions of (1.11) have a purely dispersive character (see section 4). The set of strictly stable viscosity matrices at the point u_0 is the interior of the set $S(u_0)$. The strictly stable viscosity matrices at u_0 admit the following algebraic characterization (see section 2 and [13] for further results):

$$(1.13) \quad \begin{aligned} &\text{A viscosity matrix is strictly stable if} \\ &\text{and only if there exists a } \delta > 0 \text{ so that} \\ &\text{the eigenvalues } \kappa_j(\xi), \quad 1 \leq j \leq m \text{ for} \\ &\text{the symbol } P(\xi) = -\lambda(u_0)i\xi - \xi^2 D(u_0) \text{ satisfy} \\ &\operatorname{Re} \kappa_j(\xi) < -\delta|\xi|^2 \text{ for all } \xi \in \mathbb{R}. \end{aligned}$$

Looking back at (1.10), we see that the condition of strict stability strengthens the requirement of parabolicity to an algebraic stability condition valid for all $\xi \in \mathbb{R}^1$ and not just for sufficiently high wave numbers. Thus, one objective here is to study the existence of viscous shock profiles for diffusion matrices satisfying (1.13) for every value of u_0 -- we call these the strictly stable viscosity matrices in the remainder of this paper. Our second objective is to explain the inadmissibility examples from [1] and to identify the concrete mechanisms of inadmissibility through violation of the strict stability conditions in (1.13).

In section 2, first we study some of the algebraic implications of strict stability regarding the linearized structure of the ODE's in (1.6) at the critical points, u_L, u_R for a general $m \times m$ system. For a k -shock solution of (1.1) satisfying Lax's entropy inequalities,

$$(1.14) \quad \lambda_k(u_L) > s > \lambda_k(u_R), \quad \lambda_{k+1}(u_R) > s > \lambda_{k-1}(u_L)$$

we verify there that for the ODE in (1.6),

$$(1.15) \quad \begin{array}{l} \text{the dimension of the unstable manifold at } u_L \text{ is } m - k + 1 \\ \text{the dimension of the stable manifold at } u_R \text{ is } k \end{array}$$

The following is an immediate consequence of this simple fact:

Corollary 1. All the explicit inadmissible viscosity matrices for the system in (1.10) constructed in [1] (via Theorems 3.2 or 5.2 in [1]) are not uniformly stable at either u_L or u_R .

Thus, the natural requirement of strict stability discussed in (1.11)-(1.13) is violated in these explicit examples of inadmissibility. In section 2 we also develop apparently weaker algebraic conditions which are equivalent to the strict stability condition in (1.13) for 2×2 systems -- these results are central in our discussion of the isentropic gas dynamics equations in section 4.

In section 3 we study weak shock profiles for general $m \times m$ systems. We prove a theorem which essentially characterizes matrices admissible for weak k -shocks. An immediate consequence is

Corollary 2. Assume that $D(u_0)$ is strictly stable at u_0 for the $m \times m$ system (1.1). Then there is a fixed neighborhood of u_0 such that for any weak solution (1.2) of (1.1) (satisfying (1.3)) with u_L and u_R in that neighborhood, u_L and u_R can be connected in (1.6) by a viscous shock profile satisfying (1.7) if and only if the weak solution (1.2) satisfies Liu's strict entropy condition (see section 3).

Our proof of this theorem, based on the center manifold theorem, is quite simple and was motivated by the work of Kopell and Howard [8], which might be applied in the genuinely nonlinear case. However, some new observations are needed to handle the general (non-genuinely nonlinear) case. So strictly stable viscosity matrices $D(u)$ are always admissible for sufficiently weak shocks. On the other hand, for 2×2 systems we have

Corollary 3. Suppose $n = 2$. If the 2×2 viscosity matrix $D(u)$ is not stable at u_0 , necessarily it is inadmissible for all weak k -shocks with either $k = 1$ or $k = 2$.

In section 4 we present new examples of inadmissible viscosity matrices in the large where no connection of u_L and u_R is possible, satisfying (1.7) or the reverse. In these examples, violation of strict stability is linked directly to Hopf bifurcation in a way which elucidates the mechanism behind the nonconstructive Theorem 5.3 in [1].

All the above results might lead us to guess:

Strictly stable viscosity matrices, for reasonable 2×2 genuinely nonlinear systems are always admissible for any shock solutions of (1.1) satisfying Lax's shock inequalities.

In section 4 we identify broad classes of strictly stable $D(u)$ which are admissible for all shocks of the p -system (1.8). We mention here some special results:

Corollary 4. Consider the p -system (1.8), and assume $p'(\tau) > 0$ as $\tau \rightarrow \infty$, $p'(\tau) \rightarrow -\infty$ as $\tau \rightarrow 0$.

1) Any constant strictly stable viscosity matrix D for (1.8) is globally admissible.

2) Given any viscosity matrix D_0 strictly stable at a fixed point $u_0 \in \mathbb{R}^2$, there is a smooth strictly stable $D(u)$ such that $D(u_0) = D_0$ and $D(u)$ is globally admissible.

Our proofs make use of Lyapunov functions obtained from convex entropies in a way suggested by Mock's work [12].

Despite these positive results, the conjecture above fails. We can construct a (rapidly varying) strictly stable $D(u)$ for the system (1.8) which is inadmissible for any given shock. However, the mechanism of inadmissibility is subtle and very different from those discussed earlier.

Also in section 4 we present an example with $D(u) \in \mathcal{S}(u)$ for all u (stable but not strictly stable) for the p -system (1.8) for which (1.5) is a dispersive system and (1.6) is a conservative system admitting a first integral, and no shock profiles.

Finally, we remark that the choice of the L^2 -norm for determining a class of linearly stable viscosity matrices is not the only natural choice. Other natural norms for shock wave theory such as the L^1 or BV norms might single out a smaller class of stable viscosity matrices which perhaps admit shock profiles with more special structure.

§2. THE ALGEBRAIC STRUCTURE IMPLIED BY STABLE VISCOSITY MATRICES

If we apply Fourier transforms and Plancherel's theorem to (1.13), we conclude that a viscosity matrix is uniformly stable if and only if the uniform bound

$$(2.1) \quad \max_{\substack{0 \leq t \leq T \\ 0 < \nu}} \left| \exp \frac{t}{\nu} P(\xi) \right| < C(T)$$

is satisfied $\xi \in \mathbb{R}$ where $P(\xi) = -\xi^2 D(u_0) - i\xi A(u_0)$. In appendix A, we prove the following algebraic characterization of the strictly stable viscosity matrices, using the Kreiss matrix theorem:

Theorem 2.1.

The following are equivalent for a viscosity matrix $D(u)$ for the $m \times m$ system in (1.5)

- 1) $D(u)$ is strictly stable at u_0
- 2) The eigenvalues, $\kappa_j(\xi)$, $j = 1, \dots, m$ of $P(\xi)$ satisfy

$$\operatorname{Re} \kappa_j(\xi) < -\delta_0 |\xi|^2 \text{ for some fixed } \delta_0 > 0 \text{ and all } \xi \in \mathbb{R}.$$
- 3) The following three conditions are satisfied:
 - (i) The system in (1.5) is parabolic, i.e. the eigenvalues of $D(u_0)$ have positive real part
 - (ii) $\int_k D x_k(u_0) > 0$, $k = 1, \dots, m$
 - (iii) The symbol $P(\xi)$ has no purely imaginary eigenvalues for $\xi \neq 0$

Remark. We note here that a simple sufficient condition guaranteeing strict stability is the following: There is a positive definite symmetric matrix, $E(u_0)$, so that $EA(u_0)$ is symmetric and $ED(u_0)$ is positive definite (perhaps not symmetric).

For the proof of this fact, we compute that

$$\operatorname{Re}(\kappa) e^* E e + \xi^2 \operatorname{Re} e^* E D e = 0$$

where $(P(\xi) - \kappa)e = 0$, so that criterion (2) of Theorem 2.1 is satisfied.

Next we use Theorem 2.1 to determine the linearized structure of (1.6) at the critical points u_L, u_R . If u_0 is any critical point of (1.6), the stable (unstable) manifold $M_-(M_+)$ of (1.6) at u_0 is tangent to the invariant subspace of the linearization of (1.6) at u_0 .

$$(2.2) \quad D^{-1}(A(u_0) - sI) = Q(u_0, s)$$

corresponding to eigenvalues with negative (positive) real parts, and

$$(2.3) \quad \begin{aligned} \dim M_-(u_0) &= \text{number of eigenvalues of } Q(u_0, s) \\ &\quad \text{with negative real parts} \\ \dim M_+(u_0) &= \text{number of eigenvalues of } Q(u_0, s) \\ &\quad \text{with positive real parts} \end{aligned}$$

We have the following general fact:

Theorem 2.2.

Suppose $D(u_0)$ is a strictly stable $m \times m$ viscosity matrix for (1.1). For any k -shock satisfying Lax's entropy inequalities,

$$\begin{aligned} \lambda_k(u_L) &> s > \lambda_k(u_R) \\ \lambda_{k+1}(u_R) &> s > \lambda_{k-1}(u_L) \end{aligned}$$

it follows that

$$(2.4) \quad \begin{aligned} \dim M_-(u_R) &= k \\ \dim M_+(u_L) &= m - k + 1 \end{aligned}$$

Before proving Theorem 2.2, we remark that Corollary 1 of the introduction follows immediately in the following fashion: For shocks moving with positive wave speed for the p -system (1.8), $k = 2$, so that applying Theorem 2.2 we have

$$\dim M_-(u_R) = 2, \quad \dim M_+(u_L) = 1$$

for strictly stable viscosity matrices. On the other hand, all of the inadmissibility criteria in Theorem 3.2 and Theorem 5.2 of [1] imply that necessarily

$$\dim M_-(u_R) = 1, \quad \dim M_+(u_L) = 2.$$

Thus the inadmissible viscosity matrices constructed through these criteria cannot be strictly stable. Similar remarks apply for shocks in the p -system with $s < 0$, and for applications of the results in [1] for general 2×2 systems.

Proof of 2.2.

We consider the $m + 1$ open intervals, $I_0 = (-\infty, \lambda_1(u_0))$,

$$I_j = (\lambda_j(u_0), \lambda_{j+1}(u_0)), \quad j = 1, \dots, m-1, \quad I_m = (\lambda_m(u_0), \infty).$$

We set

s^+ = number of eigenvalues of $Q(u_0, s)$ with
positive real parts

s^- = number of eigenvalues of $Q(u_0, s)$ with
negative real parts

and begin the proof of Theorem 2.2 with the claim,

$$(2.5) \quad \begin{aligned} &s^+, s^- \text{ are constant as } s \text{ varies over each } I_j \\ &\text{and } s^+ + s^- = m \end{aligned}$$

provided that $D(u_0)$ is strictly stable. First, from (1.14), zero is never an eigenvalue on any I_j ; furthermore,

$$(2.6) \quad \begin{aligned} &Q(u_0, s) \text{ never has any non-zero purely} \\ &\text{imaginary eigenvalues, } i\tau \neq 0, \text{ for any } s \end{aligned}$$

because

$$\det(Q - i\tau) = 0 \iff \det(P(\tau) - \kappa) = 0$$

with $\kappa = -i\tau$ so that κ is on the imaginary axis; this contradicts iii) of 3) in Theorem 2.1. Since the eigenvalues of Q are continuous functions of s and cannot cross the imaginary axis on I_j , we deduce the claim in (2.5). The proof of Theorem 2.2 is finished once we establish that

$$(2.7) \quad s^+(u_0)|_{I_j} = m - j, \quad j = 0, 1, \dots, m$$

for any u_0 (apply the information from Lax's shock inequalities and (2.6) with $u_0 = u_L, u_R$). As $s \rightarrow \infty$, $Q(u_0, s) \sim -sD^{-1}$ and 3) i) of Theorem 2.1 together with (2.5) guarantees

$$(2.8) \quad s^+(u_0)|_{I_m} = 0$$

From (2.6), we see that an eigenvalue of $Q(u_0, s)$ can cross the imaginary axis only through zero and at the special points, $s = \lambda_k(u_0)$, $k = 1, \dots, m$. We claim that

$$(2.9) \quad \begin{aligned} &\text{For } |s - \lambda_k| < \epsilon, Q(u_0, s) \text{ has a simple} \\ &\text{eigenvalue } \tau_k(s), \text{ with } \tau_k(\lambda_k) = 0, \text{ and} \end{aligned}$$

$$\frac{\partial \tau_k}{\partial s} \Big|_{s=\lambda_k} = -(L_k, D\tau_k)^{-1} \quad k = 1, \dots, m$$

From (2.8), (2.9), and 3) ii) of Theorem 2.1 we deduce (2.7) by induction on j . It remains for us to establish (2.9). Now, $-\lambda_k I + A$ has simple eigenvalues; therefore, $-\mathcal{D} + (-sI + A)$ has a unique smoothly varying simple eigenvalue, $\theta(\tau, s)$, with $\theta(0, \lambda_k) = 0$ for $|\tau| + |s - \lambda_k| < \varepsilon$. We let $\tilde{r}(\tau, s)$ denote the corresponding right eigenvector with $\tilde{r}(0, \lambda_k) = r_k(u_0)$ satisfying

$$(-\mathcal{D} + (-sI + A))\tilde{r} = \theta(\tau, s)\tilde{r}$$

By differentiating this formula with respect to τ, s , evaluating at $s = \lambda_k$, $\tau = 0$, and taking the inner product with $l_k(u_0)$ we obtain

$$(2.10) \quad \left. \frac{\partial \theta}{\partial s} \right|_{(0, \lambda_k)} = -1, \quad \left. \frac{\partial \theta}{\partial \tau} \right|_{(0, \lambda_k)} = -(l_k, Dr_k) \neq 0$$

where we have applied 3) ii) of Theorem 2.1 to $\frac{\partial \theta}{\partial \tau}$. From the implicit function theorem and (2.10), we deduce (2.9) directly.

The Special Structure of Stable 2×2 Systems

First, we prove that the sufficient condition mentioned below Theorem 2.1 is also necessary when $m = 2$. In fact, we have

Proposition 2.1. The following are necessary and sufficient conditions that $D(u)$ be strictly stable at u_0 when $m = 2$.

- 1) D^{-1} is strictly stable at u_0 .
- 2) There exists a smoothly varying positive definite symmetric matrix, $E(u)$, defined near u_0 with $EA(u)$ symmetric and $ED(u)$ positive definite.
- 3) (i) $(l_k, Dr_k)(u_0) > 0$ for $k = 1$ and 2 , and
(ii) $\det D(u_0) > 0$.

Given the matrix $A(u)$ with distinct eigenvalues, we let $R(u)$ denote a fixed smoothly varying right eigenvector matrix with $L(u)$ the corresponding left eigenvector matrix ($LR = I, LAR$ diagonal). The sufficient condition for strict stability in the remark below Theorem 2.1 is clearly satisfied provided

$$(2.11) \quad LDR \text{ is positive definite.}$$

But $R(u)$ is not uniquely determined by $A(u)$. Proposition 2.1 follows easily from the

following result, which says that (2.11) is necessary for strict stability in 2×2 systems:

Proposition 2.2. Assume $n = 2$. Let $D(u)$ be a smooth 2×2 matrix. Then $D(u)$ is strictly stable at each point if and only if there exists a smooth positive diagonal matrix $S(u)$, such that if $\tilde{R} = RS$, $\tilde{L} = \tilde{R}^{-1}$, then $\tilde{L}\tilde{D}\tilde{R}(u)$ is positive definite for all u .

We leave it as an exercise for the reader to check Proposition 2.2 implies Proposition 2.1. The only if part of Proposition 2.2 is the key fact and this follows from the lemma below.

Lemma. Suppose $A = \begin{pmatrix} a & b \\ c & d \end{pmatrix}$ satisfies $a, d > 0$, $ad - bc > 0$. For $-1 < \alpha < 1$, let $S_\alpha = \text{diag}(\sqrt{1-\alpha}, \sqrt{1+\alpha})$. Then there exist α_- and α_+ , $-1 < \alpha_- < \alpha_+ < 1$, depending smoothly on A , such that for any α with $\alpha_- < \alpha < \alpha_+$, the scaled matrix $S_\alpha^{-1}AS_\alpha$ is positive definite.

Proof. $\begin{pmatrix} a & b \\ c & d \end{pmatrix}$ is positive definite if and only if $a, d > 0$ and $(b+c)^2 - 4ad < 0$. Now $S_\alpha^{-1}AS_\alpha = \begin{pmatrix} a & b\lambda \\ c/\lambda & d \end{pmatrix}$, $\lambda = \left(\frac{1+\alpha}{1-\alpha}\right)^{1/2}$. For $-1 < \alpha < 1$, this is positive definite exactly when

$$Q(\alpha) \equiv [b(1+\alpha) + c(1-\alpha)]^2 - 4ad(1-\alpha^2) < 0$$

To prove the lemma, we shall show that $Q < 0$ between distinct roots α_- and α_+ of $Q(\alpha)$ with $-1 < \alpha_- < \alpha_+ < 1$. We compute

$$\begin{aligned} Q(-1) &= 4c^2 > 0 & Q(1) &= 4b^2 > 0 \\ Q(0) &= (b+c)^2 - 4ad & Q'(0) &= 2(b+c)(b-c) \\ \frac{1}{2} Q'' &= 4ad + (b-c)^2 = 4(ad-bc) + (b+c)^2 > 0 \end{aligned}$$

The minimum of $Q(\alpha)$ is thus attained at $\alpha_0 = -Q'(0)/Q''$. Either $|b-c| < |b+c|$ or vice versa, so $|\alpha_0| < 1$. The discriminant of Q is

$$\begin{aligned} \frac{1}{4} Q'(0)^2 - \frac{1}{2} Q''Q(0) &= (b+c)^2(b-c)^2 + (4ad - (b+c)^2)(4ad + (b-c)^2) \\ &= 4ad(4ad - 4bc) > 0. \end{aligned}$$

So $Q(u)$ has distinct real roots in the interval $[-1,1]$, which are then smooth functions of the coefficients.

The technical result below, which characterizes the variation possible when a vector field is multiplied by an arbitrary smooth 2×2 strictly stable matrix, will be useful in our investigation of inadmissibility for strong shocks in section 4. As usual, assume that $R(u) = (r_1, r_2)$ is a smooth matrix of right eigenvectors of $A(u)$.

Proposition 2.3. Suppose nonzero vectors w and $\tilde{w}$ in R^2 satisfy the condition

(Q) There exists a positive diagonal matrix S so that $\tilde{w}^T S w > 0$.

(Roughly, condition (Q) means that w and $\tilde{w}$ are not of opposite sign.) Let $v = w_1 r_1 + w_2 r_2 = R(u)w$, $\tilde{v} = R(u)\tilde{w}$. Then there exists a strictly stable matrix $\tilde{D}(u, w, \tilde{w})$, depending smoothly on u, w and $\tilde{w}$, such that $\tilde{D}v = \tilde{v}$. Conversely if D is strictly stable and w any nonzero vector in R^2 , then w and $LDRw$ satisfy condition (Q).

The proof is postponed until Appendix B.

Remark. Condition (Q) covers two cases:

Q1) If w lies on a coordinate axis (either w_1 or w_2 are zero so $v = r_1$), then $\tilde{w}$ must lie in an adjacent quadrant (so $\tilde{w}^T w > 0$).

Q2) If w lies strictly in some quadrant Q of R^2 (w_1, w_2 nonzero) then $\tilde{w}$ must not lie in the closed quadrant opposite ($\tilde{w} \notin -Q$).

Remark. If $w, \tilde{w}$ satisfy condition (Q), so do $w, t\tilde{w} + (1-t)w$, for any t , $0 < t < 1$, and so do $w, S\tilde{w}$ for any positive diagonal S .

§3. ADMISSIBILITY IN GENERAL FOR WEAK k-SHOCKS

We begin this section by defining Liu's strict condition (E). We consider the structure of the Hugoniot set of pairs of vectors (u_L, u_R) satisfying

$$(3.1) \quad f(u_L) - f(u_R) - s(u_L - u_R) = 0$$

for some wave speed s . Fixing u_L , the local structure of the set of states u_R satisfying (3.1) is well-known (see [3] and [10]). In some neighborhood of u_L this set consists of m curves, $\tilde{u}^k(\rho)$, $k = 1, \dots, m$ passing through u_L with corresponding shock speeds $s^k(\rho)$ for $k = 1, \dots, m$ satisfying

$$(3.2) \quad \begin{aligned} \tilde{u}^k(0) &= u_L & s^k(0) &= \lambda_k(u_L) \\ \frac{d\tilde{u}^k}{d\rho}(0) &= r_k(u_L) & \frac{ds^k}{d\rho}(0) &= \frac{1}{2} (\nabla \lambda_k \cdot r_k)(u_L) \\ \rho &= \ell_k(u_L) \cdot (\tilde{u}^k(\rho) - u_L) \end{aligned}$$

Liu's strict entropy condition for the k -shock wave in (1.2) with $u_R = \tilde{u}^k(\rho_R)$ is $s(E) \quad s^k(\rho) > s = s^k(\rho_R)$ for ρ between zero and ρ_R . If $\lambda_k(u)$ is genuinely nonlinear and $|u_L - u_R|$ is small, this condition is equivalent to Lax's shock inequalities.

Corollary 2 of the introduction is an immediate consequence of Theorem 2.1.3) and the main result of this section to be described below. Before stating this result, we remark that in the special case where u and $f(u)$ are scalars, Liu's (strict) entropy condition reduces to Oleinik's familiar (strict) condition E; furthermore, we invite the reader to check by explicit quadrature that for the scalar parabolic equation

$$u_t + f(u)_x = \nu u_{xx}$$

u_L, u_R can be connected by a viscous shock profile if and only if Oleinik's (strict) condition E is satisfied -- this fact indicates that the weak shock theorem stated below is sharp in general.

Our main result here is the following:

Theorem 3.1. Fix $u_0 \in \mathbb{R}^n$ and k , $1 < k < n$. Assume $\lambda_k(u)$ is not linearly degenerate in any neighborhood of u_0 . Assume that $D(u_0)$ satisfies the nondegeneracy conditions:

- (i) $D(u_0)$ is nonsingular
- (ii) $\lambda_k \text{Dr}_k(u_0) \neq 0$
- (iii) $[-\xi^2 D + i\xi(A - \lambda_k)](u_0)$ is nonsingular for all real $\xi \neq 0$.

Then the following are equivalent:

- 1) $\lambda_k \text{Dr}_k(u_0) > 0$ [$\lambda_k \text{Dr}_k(u_0) < 0$]
- 2) D is locally [in]admissible for k -shocks in a neighborhood of u_0 . That is, there exists $\delta > 0$ so that for any u_L and u_R in $B_\delta(u_0) = \{u \mid |u - u_0| < \delta\}$ satisfying the Rankine-Hugoniot relations for some speed $s = s^k(\rho_R)$, then a shock profile lying in $B_\delta(u_0)$ exists connecting u_L to u_R [u_R to u_L] if and only if Liu's strict entropy condition $s(E)$ is satisfied. In any case, at most one trajectory $u(\xi)$ of (1.6) connecting u_R and u_L exists which remains in $B_\delta(u_0)$ for all ξ real.

Remark: Before discussing the proof of Theorem 3.1, we indicate the fashion in which Corollary 3 of the introduction is an immediate consequence of Proposition 2.1 and this theorem. From 3) of Proposition 2.1, if a parabolic viscosity matrix $D(u)$ is not uniformly stable at u_0 , then necessarily,

$$\begin{aligned} &\text{either } \lambda_1 \text{Dr}_1(u_0) < 0 \\ &\text{or } \lambda_2 \text{Dr}_2(u_0) < 0 \end{aligned}$$

(or both occur). With the above inequalities, we apply the inadmissibility criterion from Theorem 3.1 to either the one waves or two waves to deduce Corollary 3.

Theorem 3.1 is proved in two steps. First, for all u_L near u_0 and s near $\lambda_k(u_0)$ we reduce the connection problem for the system (1.6) to that for a scalar ODE locally, by employing the center manifold theorem with the nondegeneracy conditions i-iii). That is, a curve is constructed, locally invariant for (1.6), which contains all the critical points of (1.6), for any u_L , in a fixed neighborhood of u_0 . In the second step, this one-dimensional flow is analyzed: Critical points on the invariant curve are points $\hat{u}_k(\rho)$ on the Hugoniot curve for u_L having $s^k(\rho) = s$. The stability of the rest point u_L in the flow is determined by the sign of $\lambda_k \text{Dr}_k(u_L)(\lambda_k(u_L) - s)$. For a shock

satisfying $s(E)$, $s^k(0) = \lambda_k(u_L) > s$. Degenerate cases are treated by continuity, using the center manifold.

Step 1. Extend the system (1.6) by introducing the parameters $v = u_L$ and s as additional variables; then (1.6) may be written

$$\begin{aligned} u_\xi &= D^{-1}(u)[f(u) - f(v) - s(u - v)] \\ v_\xi &= 0 \\ s_\xi &= 0 \end{aligned} \quad (3.3)$$

Our analysis will be based on the construction of a center manifold for (3.3) at the critical point $(u, v, s) = (u_0, u_0, \lambda_k(u_0))$. The center manifold theorem (Kelley, [6], Theorem 3) says:

Theorem. Suppose that a system of ordinary differential equations may be written as

$$\begin{aligned} x' &= Ax + \tilde{X}(x, y, z) \\ y' &= By + \tilde{Y}(x, y, z) \\ z' &= Cz + \tilde{Z}(x, y, z) \end{aligned}$$

where A, B , and C are constant square matrices whose eigenvalues have positive, zero, and negative real parts, respectively, and $\tilde{X}, \tilde{Y}$, and $\tilde{Z}$ are $C^r(r > 2)$ and vanish along with their first derivatives at $(x, y, z) = 0$.

Then there exists a locally invariant manifold for this system,

$$M^* = \{(x, y, z) \mid |y| < \delta, x = u^*(y), z = w^*(y)\}$$

where u^* and w^* are C^r functions defined for $|y| < \delta$ for some δ sufficiently small, and vanishing with their first derivatives at $y = 0$.

The center manifold need not be unique, but the following uniqueness property for trajectories does hold: The center manifold (parametrized by y) may be taken to be the intersection of a center-stable manifold (parametrized by y and z) and a center-unstable manifold (parametrized by y and x). Then any trajectory which lies in a small neighborhood $B_\delta(0)$ for all time must lie on this center manifold. This property follows from this fact, stated in Kelley [7]: If a trajectory starts in a small neighborhood $B_\delta(0)$ at a point not on the center-stable manifold, then it must leave $B_\delta(0)$ at some positive time.

Let us now apply the center manifold theorem. Without loss of generality, we may assume $u_0 = 0$, $\lambda_k(u_0) = 0$. For convenience, we introduce $w = u - v$ and the vector $W = (w, v, s)^T$ in $\mathbb{R}^{2m+1}$. We write (3.3) in the form

$$(3.4) \quad W_\xi = T(W)$$

To apply the center manifold theorem, it suffices to describe two invariant subspaces for the linearisation dT at the critical point 0: algebraic eigenspaces corresponding to groups of eigenvalues with zero and nonzero real parts, respectively. In block form on $\mathbb{R}^n \times \mathbb{R}^n \times \mathbb{R}$, we calculate

$$dT(0) = \begin{bmatrix} D^{-1}A(0) & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

The characteristic equation for $dT(0)$ may be written

$$\lambda^{m+1} \det(A - \lambda D)_{\lambda=0} = 0$$

We claim that the nondegeneracy conditions imply that the algebraic eigenspace for eigenvalues with zero real part is simply the kernel of $dT(0)$. Indeed, condition iii) means that $dT(0)$ has no nonzero imaginary eigenvalues.

Claim: The algebraic eigenspace for $dT(0)$ for the eigenvalue 0 is equal to $\ker dT(0)$ if and only if $I_k Dr_k(0) \neq 0$.

Proof. This eigenspace is larger than $\ker dT(0)$ if and only if $\text{range } dT(0) \cap \ker dT(0)$ is nontrivial. This occurs when there exists v in $\mathbb{R}^n$ such that $D^{-1}A \cdot v = r_k$, or $Dr_k = A \cdot v$, whence $I_k Dr_k = 0$. If $I_k Dr_k \neq 0$, no such v exists.

Thus, let $Y = \ker dT(0)$, $X = \text{range } dT(0)$. X and Y are complementary invariant subspaces for $dT(0)$ comprising the algebraic eigenspaces for eigenvalues with nonzero and zero real parts, respectively. Further explicit decomposition of $\mathbb{R}^{2m+1}$ is unnecessary.

Applying the center manifold theorem, we have:

Proposition 3.2. Assume that D satisfies the nondegeneracy conditions at $u_0 = 0$ with $\lambda_k(u_0) = 0$. Then there exists $\delta > 0$ and a C^r function $g : Y \rightarrow X$ defined on $B_\delta(0) \cap Y$ so that

- 1) $M^* = \{x + y \in \mathbb{R}^{2m+1} | x = g(y)\}$ is a locally invariant manifold for equation (3.4).
- 2) $g(0) = 0$ and $dg(0) = 0$. Thus M^* is tangent to Y at 0 .
- 3) Any trajectory of (3.4) which lies in $B_\delta(0)$ for all t lies in M^* . In particular, critical points in $B_\delta(0)$ lie in M^* .

We now describe how this center manifold reduces the connection problem for the system (1.6) to one dimension. Observe that $Y = \ker dT(0)$ is spanned by the $m+2$ vectors $(x_k, 0, 0)$, $(0, 0, 1)$, and $(0, x_j, 0)$, $j = 1, \dots, m$.

Proposition 3.3. Assume that $D(u_0)$ satisfies the nondegeneracy conditions i-iii). Then there exists $\delta > 0$ so that if $|u_L - u_0| + |s - \lambda_k(u_0)| < \delta$, there is a locally invariant curve $u(n, u_L, s)$ for the system (1.6) containing u_L and any point u_R in $B_\delta(u_0)$ satisfying the Rankine-Hugoniot relations $f(u_R) - f(u_L) - s(u_R - u_L) = 0$.

Proof. Define a line in Y parametrized by $y(n) = (nx_k, u_L, s)$. The curve $W(n) = y(n) + g(y(n))$ lies in M^* while $|y(n)| < \delta$. Since g maps into range $dT(0)$, we may write $g(y(n)) = (\tilde{g}(n, u_L, s), 0, 0)$. Under equation (3.4), the v and s components of $W = (w, v, s)$ remain invariant. Hence the curve $W(n)$ is the intersection of two locally invariant manifolds, so is locally invariant. Returning to the (u, v, s) coordinates of (3.3), we obtain an invariant curve for (1.6) parametrized by

$$u(n, u_L, s) = u_L + nx_k(u_0) + \tilde{g}(n, u_L, s)$$

so long as

$$|y(n)| = |nx_k| + |u_L - u_0| + |s - \lambda_k(u_0)| < \delta.$$

If u_R is in $B_\delta(u_0)$ and $f(u_R) - f(u_L) - s(u_R - u_L) = 0$, then the point $(u_R - u_L, u_L, s)$ is a critical point of $T(W)$, so lies in M^* , and therefore $u_R - u_L = \eta_R r_k + \tilde{g}(\eta_R, u_L, s)$ for some η_R .

The flow on the invariant curve $u(n, u_L, s)$ is now determined by a scalar ODE for $n(\xi)$,

$$(3.5) \quad \eta_\xi = F(\eta, u_L, s)$$

where F is C^r , determined by the equation

$$(3.6) \quad D(u)u_\eta F(\eta, u_L, s) = f(u) - f(u_L) - s(u - u_L)$$

where $u = u(n, u_L, s)$. From the uniqueness property (3) of Proposition 3.2, two critical

points u_L, u_R in $B_\delta(u_0)$ are connected, left to right, by a trajectory in $B_\delta(u_0)$ if and only if $\eta_L = 0$ and η_R are connected, left to right, by a trajectory of (3.5).

Step 2. We proceed to analyze the flow (3.5). Two critical points $\eta_L = 0$ and η_R are connected, left to right, by a trajectory of (3.5) if and only if $\text{sgn } F(\eta, u_L, s) = \text{sgn } \eta_R$ for η between 0 and η_R . From (3.6) we obtain

$$(3.7) \quad \begin{aligned} F(\eta, u_L, s) l_k(u_L) D(u) u_\eta &= l_k(u_L) [f(u) - f(u_L) - s(u - u_L)] \\ F(\eta, u_L, s) l_k(u_L) D(u_L) u_\eta &= (\lambda_k(u_L) - s) l_k(u_L) u_\eta(0, u_L, s) \end{aligned}$$

We assume δ is so small that for each u_L in $B_\delta(u_0)$ the Hugoniot curves $\tilde{u}^k(\rho, u_L)$ in $B_\delta(u_0)$ are as described at the beginning of this section. The invariant curve $u(\eta, u_L, s)$ intersects the Hugoniot curve $\tilde{u}^k(\rho, u_L)$ just when η is a critical point of (3.5). We define a correspondence between η and ρ (given u_L and s) by

$$\rho(\eta) = l_k(u_L)(u(\eta, u_L, s) - u_L), \text{ so } \rho_\eta = l_k(u_L) u_\eta$$

Lemma 3.4. If δ is sufficiently small, then if $|u_L - u_0| + |s - \lambda_k(u_0)| < \delta$, we have

1) $\text{sgn } l_k(u_L) D(u) u_\eta = \text{sgn } l_k \text{Dr}_k(u_0)$ and $\text{sgn } l_k(u_L) u_\eta = 1$ in $B_\delta(u_0)$. So ρ increases with η .

2) $F(\eta, u_L, s) = 0$ if and only if $s^k(\rho(\eta)) = s$ or $\eta = 0$.

3) For all η between 0 and η_0 ,

$$(3.8) \quad \text{sgn } F(\eta, u_L, s) \text{sgn } l_k \text{Dr}_k(u_0) = \text{sgn } \eta(s^k(\rho(\eta)) - s)$$

provided $s^k(\rho(\eta)) - s$ is of one sign between 0 and η_0 .

Using (3.8) we may complete the proof of Theorem (3.1). Assume u_L and $u_R = \tilde{u}^k(\rho_R, u_L)$ satisfy the Rankine-Hugoniot relations with $s = s^k(\rho_R)$, and assume Liu's strict entropy condition $s(E)$ holds. Then $u_R = u(\eta_R, u_L, s)$ for some η_R , and $\rho_R = l_k(u_L)(u_R - u_L) = \rho(\eta_R)$. By (3.8) and condition $s(E)$,

$$\text{sgn } F(\eta, u_L, s) \text{sgn } l_k \text{Dr}_k(u_0) = \text{sgn } \eta_R$$

for all η between 0 and η_R . So a trajectory of the flow (3.5) connects $\eta_L = 0$ and η_R , left to right, if and only if $l_k \text{Dr}_k(u_0) > 0$.

If $l_k \text{Dr}_k(u_0) > 0$ and u_R is as above, but the entropy condition is not satisfied, then either $s^k(\rho) = s$ for some ρ between 0 and ρ_R , whence a critical point

separates 0 and η_R in (3.8), or else $s^k(\rho) < s$ for all ρ between 0 and ρ_R . Then (3.8) implies that a trajectory of (3.5) connects η_R on the left to $\eta_L = 0$ on the right. In either case, no trajectory of (1.6) lying in $B_\delta(u_0)$ can connect u_L on the left to u_R on the right.

Proof of Proposition 3.4. Part 1) follows from continuity and the fact that

$u_\eta(0, u_0, \lambda_k(u_0)) = r_k(u_0)$, since $d\tilde{g}(0, u_0, \lambda_k(u_0)) = 0$. For part 2), if δ is sufficiently small and $\eta \neq 0$, then $F(\eta, u_L, s) = 0$ if and only if $u(\eta, u_L, s)$ lies on the k -th Hugoniot curve for u_L , so $u(\eta, u_L, s) = \tilde{u}^k(\rho, u_L)$ for some ρ , and $s^k(\rho, u_L) = s$. But then $\rho = \lambda_k(u_L)(\tilde{u}^k(\rho) - u_L) = \rho(\eta)$. We shall establish part 3) in the case that $s^k(\rho(\eta)) > s$ for η between 0 and $\eta_0 > 0$, and $\lambda_k Dr_k(u_0) > 0$ (remaining cases are similar). First, $\lambda_k(u_L) = s^k(0) > s$. Then $\lambda_k(u_L) > \tilde{s}$ for any $\tilde{s} < s$, so $F_\eta(0, u_L, \tilde{s}) > 0$ by (2.5). If $\tilde{s}$ is close to s , then $\rho(\frac{1}{2}\eta_0, u_L, \tilde{s}) < \rho(\eta_0, u_L, s)$, so $F(\eta, u_L, \tilde{s}) > 0$ for η between 0 and $\frac{1}{2}\eta_0$. (Since $s^k(\rho(\eta, u_L, \tilde{s})) > \tilde{s}$, it cannot vanish by part 2). Letting $\tilde{s}$ increase to s we get $F(\eta, u_L, s) > 0$ for η between 0 and $\frac{1}{2}\eta_0$. (Again, $F(\eta, u_L, s)$ cannot vanish for η between 0 and η_0 by part 2).)

§4. ADMISSIBLE VISCOSITIES FOR THE p-SYSTEM

Besides the basic conditions $p'(\tau) < 0$, $p''(\tau) > 0$, for the p-system in (1.8), in this section we assume additionally that

$$(4.1) \quad \begin{aligned} -p'(\tau) &\rightarrow \infty \text{ as } \tau \rightarrow 0 \\ -p'(\tau) &\rightarrow 0 \text{ as } \tau \rightarrow \infty \end{aligned}$$

These conditions simplify many of the statements below. Suitable modifications of these results when (4.1) is not satisfied we leave for the interested reader to verify. With

$u_L = (\tau_L, v_L)$, $u_R = (\tau_R, v_R)$, the Hugoniot relations from (1.2) imply that

$$(4.2) \quad \begin{aligned} -(v_L - v_R) &= s(\tau_L - \tau_R), \quad s = \pm \left(\frac{p(\tau_L) - p(\tau_R)}{-(\tau_L - \tau_R)} \right)^{1/2} \\ p(\tau_L) - p(\tau_R) &= s(v_L - v_R) \end{aligned}$$

The back shocks (1-shocks) are those waves moving with speed $s < 0$ and satisfying the entropy inequality

$$(4.3) \quad -c(\tau_L) > s > -c(\tau_R)$$

while the front shocks (2-shocks) are those waves moving with speed $s > 0$ and satisfying the entropy inequality

$$(4.4) \quad c(\tau_L) > s > c(\tau_R)$$

Here $c(\tau) = \left(\frac{-dp}{d\tau} \right)^{1/2}$ is the Lagrangian sound speed. As a consequence of Galilean invariance, the front and back shocks should describe the same physics under spatial reflection. Indeed, this is the case and in fact the reader can easily verify that

$$(4.5) \quad \begin{aligned} (\tau_L, v_L), (\tau_R, v_R) &\text{ define a front shock moving with speed } s > 0 \text{ satisfying (4.2) and (4.4) if and only if} \\ (\tilde{\tau}_L, \tilde{v}_L), (\tilde{\tau}_R, \tilde{v}_R) &\text{ define a back shock moving with speed } -s < 0 \text{ satisfying (4.2) and (4.3) where} \\ (\tilde{\tau}_L, \tilde{v}_L) &= (\tau_R, -v_R), (\tilde{\tau}_R, \tilde{v}_R) = (\tau_L, -v_L) \end{aligned}$$

For the p-system, one right eigenvector matrix is

$$(4.6) \quad R(\tau) = \begin{pmatrix} 1 & 1 \\ c(\tau) & -c(\tau) \end{pmatrix}$$

with corresponding left eigenvector matrix

$$(4.7) \quad L(\tau) = \frac{1}{2} \begin{pmatrix} 1 & c^{-1} \\ 1 & -c^{-1} \end{pmatrix}$$

Here we study the (non)existence of viscous profiles for parabolic perturbations of (1.8) where the diffusion matrix D is given by

$$(4.8) \quad D(\tau, v) = \begin{pmatrix} d_{11} & d_{12} \\ d_{21} & d_{22} \end{pmatrix}, \quad \begin{aligned} d_{11} + d_{22} &> 0 \\ d_{11}d_{22} - d_{12}d_{21} &> 0 \end{aligned}$$

and the matrix entries are smoothly varying functions of (τ, v) . From (4.6)-(4.8) we compute

$$(4.9) \quad \begin{aligned} 2(LDR)_{11} &= (cd_{12} + c^{-1}d_{21}) + d_{11} + d_{22} \\ 2(LDR)_{22} &= -(cd_{12} + c^{-1}d_{21}) + d_{11} + d_{22} \end{aligned}$$

therefore, from 3) of Proposition 2.1, we conclude that $D(\tau, v)$ is strictly stable at (τ, v) if and only if

$$(4.10) \quad |c(\tau)d_{12} + (c(\tau))^{-1}d_{21}| < d_{11} + d_{22}$$

Admissible and Inadmissible Viscosity Matrices for Weak Shocks

The following result is an immediate corollary of Theorem 3.1 and the remark below that theorem:

Theorem 4.1. Consider an arbitrary state (τ_0, v_0) and assume

$(d_{11} + d_{22}) \pm (c(\tau_0)d_{12} + c(\tau_0)^{-1}d_{21}) \neq 0$. Then

- (1) D is admissible for both front and back weak shocks in a neighborhood of (τ_0, v_0) if and only if D is strictly stable at (τ_0, v_0) .
- (2) Assume D is not strictly stable at (τ_0, v_0) .
 - A) If $cd_{12} + c^{-1}d_{21} < -(d_{11} + d_{22})$ at (τ_0, v_0) D is inadmissible for all weak back shocks but D is admissible for all weak front shocks in a neighborhood of (τ_0, v_0) .
 - B) If $cd_{12} + c^{-1}d_{21} > d_{11} + d_{22}$ at (τ_0, v_0) , D is admissible for all weak back shocks but D is inadmissible for all weak front shocks in a neighborhood of (τ_0, v_0) .

We make the following two remarks which are easy consequences of Theorem 4.1.

Remark 1. If D is a constant diffusion matrix, then D is admissible for all weak shocks in a small neighborhood of all points (τ_0, v_0) if and only if D is diagonal, i.e.,

$$D = \begin{pmatrix} d_{11} & 0 \\ 0 & d_{22} \end{pmatrix}, \quad d_{11} > 0, \quad d_{22} > 0.$$

This fact follows easily from Theorem 4.1 since admissibility occurs when

$$|c(\tau)d_{11} + (c(\tau))^{-1}d_{22}| < d_{11} + d_{22}$$

and we use (4.1) with $\tau \rightarrow 0$, $\tau \rightarrow \infty$ to justify the above remark.

Remark 2. There are never any examples of diffusion matrices D for the p -system which are inadmissible for all (front and back) weak shocks. The announced example in the introduction of [1] and described at the end of that paper is inadmissible for all front shocks but admissible for weak back shocks at least (this remark corrects a small error in [1]).

Hopf Bifurcation and Inadmissibility in the Large

The examples of inadmissibility described through Theorem 3.1 are not the only ones which occur in the large. One of the critical points can also be encircled by a periodic (or homoclinic) orbit leading to oscillatory behavior and preventing connection of the critical points. This possibility was pointed out in Theorem 5.3 of [1] through a nonconstructive argument. Here we link the appearance of such periodic orbits quantitatively with violation of the strict stability condition. A more subtle and quite different example of inadmissibility through oscillatory behavior for strictly stable diffusion matrices is discussed later in this section.

To be specific, we assume that there is a fixed point (τ_0, v_0) where $D(\tau_0, v_0)$ is not uniformly stable (see (4.10)) and in fact,

$$(4.11) \quad d_{11} + d_{22} < d_{12}c(\tau_0) + d_{21}(c(\tau_0))^{-1}$$

We consider front shocks with $(\tau_R, v_R) = (\tau_0, v_0)$ and the shock speed, s , as a bifurcation parameter with $s > c(\tau_0)$. From (4.2) and (4.4) it is easy to see that given

(τ_R, v_R) and $s > c(\tau_R)$ there is a unique (τ_L, v_L) defining a front shock. From (4.1) s varies over $(c(\tau_R), \infty)$ so that given (4.11), there is a critical shock wave speed $s_0 > c(\tau_0)$ with

$$(4.12) \quad \frac{s_0}{c(\tau_0)} (d_{11} + d_{22}) = c(\tau_0)d_{12} + c(\tau_0)^{-1}d_{21}$$

We compute that

$$(4.13) \quad \text{tr}(D^{-1} \begin{pmatrix} -s & -1 \\ -c & -s \end{pmatrix}) = \frac{c}{\det D} \left[-\frac{s}{c} (d_{11} + d_{22}) + cd_{12} + c^{-1}d_{21} \right]$$

Therefore, from (4.12), (4.13) at the critical point $(\tau_R, v_R) = (\tau_0, v_0)$ and for

$|s - s_0| < \delta$, $D^{-1}(\lambda - sI)$ has nonzero complex conjugate eigenvalues, $\lambda(s)$, $\bar{\lambda}(s)$ with

$$(4.14) \quad \begin{aligned} \text{Re } \lambda(s) &> 0, & s_0 - \delta < s < s_0 \\ \text{Re } \lambda(s) &< 0, & s_0 < s < s_0 + \delta \\ \text{Re } \lambda(s_0) &= 0 \end{aligned}$$

and also $\text{Re } \lambda'(s)|_{s=s_0} \neq 0$ so by Hopf's bifurcation theorem,

$$(4.15) \quad (\tau_R, v_R) \text{ is encircled by a small amplitude periodic orbit for either } s_0 - \delta' < s < s_0 \text{ or } s_0 < s < s_0 + \delta'$$

and the corresponding front shock is necessarily inadmissible for this viscosity matrix.

The same phenomenon at (τ_0, v_0) occurs for back shocks provided that the strict stability condition is violated through

$$d_{12}c(\tau_0) + d_{21}c(\tau_0)^{-1} < -(d_{11} + d_{22})$$

rather than (4.11).

By looking back at Theorems 2.1 and 2.2, the reader can see that the above argument for the p-system illustrates in a special case, a very general link between violation of strict stability and occurrence of small amplitude periodic orbits bifurcating from critical points for (1.6) for general $m \times m$ systems and guaranteeing inadmissibility when $m = 2$,

however, to keep our discussion brief, we do not develop this here in detail beyond the above example.

Admissibility in the Large

Here we exhibit a reasonably wide class of strictly stable viscosity matrices which are admissible for all shocks of the p-system. In particular, we prove Corollary 4 of the introduction.

Theorem 4.2. Suppose conditions (4.1) hold, and suppose $D(\tau, v)$ is a smooth strictly stable viscosity matrix for the p-system such that

a) $D(\tau, v)$ is constant exterior to a compact region Ω in the half plane $\tau > 0$.

b) For some fixed λ , $\begin{pmatrix} c(\tau)^2 & \lambda \\ \lambda & 1 \end{pmatrix} \cdot D(\tau, v)$ is positive definite in Ω .

Then $D(\tau, v)$ is admissible for all shocks of the p-system.

Remark. For any fixed (τ, v) , there does exist λ , $|\lambda| < c(\tau)$, such that

$\begin{pmatrix} c^2 & \lambda \\ \lambda & 1 \end{pmatrix} D(\tau, v)$ is positive definite. To see this, consider the matrix of left eigenvectors for the p-system defined by

$$L_\alpha = \begin{pmatrix} \sqrt{1+\alpha} & 0 \\ 0 & \sqrt{1-\alpha} \end{pmatrix} \cdot \begin{pmatrix} c & 1 \\ c & -1 \end{pmatrix}$$

It follows from Proposition 2.2 that for certain α in the interval $(-1, 1)$, the matrix $L_\alpha D L_\alpha^{-1}$, hence $L_\alpha^T L_\alpha D$, is positive definite. But

$$L_\alpha^T L_\alpha = 2 \begin{pmatrix} c^2 & c\alpha \\ c\alpha & 1 \end{pmatrix}.$$

Corollary 4 of the introduction follows immediately from the theorem and remark above. For if D_0 is strictly stable at a fixed (τ_0, v_0) , then for some λ , $\begin{pmatrix} c^2(\tau) & \lambda \\ \lambda & 1 \end{pmatrix} D_0$ is positive definite at $\tau = \tau_0$, so also for τ in a small neighborhood Ω of (τ_0, v_0) . Let $\psi(\tau, v)$ be a function such that $\psi = 1$ at (τ_0, v_0) , $\psi \equiv 0$ outside Ω , and let $D(\tau, v) = \psi D_0 + (1 - \psi)I$. Theorem 4.2 applies, yielding Corollary 4.

To put our proof of 4.2 in context, recall that an entropy for the system of conservation laws (1.1) is a function $E(u)$ such that for some $Q(u)$ (the entropy flux) we have

$$(4.16) \quad \nabla E \cdot \lambda(u) = \nabla Q(u)$$

Smooth solutions of (1.1) also satisfy $E(u)_t + Q(u)_x = 0$. The Hessian of $E(u)$ symmetrizes (1.1), i.e., $\nabla^2 E \cdot \lambda(u)$ is symmetric (differentiate above). (Compare Proposition 2.1(2).) A 2×2 system such as the p-system admits many entropies. In fact, for the p-system (4.16) reduces to the one equation $E_{\tau\tau} - c^2(\tau)E_{vv} = 0$. We consider two special solutions: $E_0(\tau, v) = v^2/2 + P(\tau)$, where $P'(\tau) = p(\tau)$, and $\tilde{E}(\tau, v) = \tau v$. We define $E_\lambda = E_0 + \lambda \tilde{E}$, and note $\nabla^2 E_\lambda = \begin{pmatrix} c^2 & \lambda \\ \lambda & 1 \end{pmatrix}$. Hypothesis b) of 4.2 simply says that $\nabla^2 E_\lambda D$ is positive definite in Ω , and implies that E_λ itself is convex in Ω .

Proof of 4.2. Fix a front shock with $u_L = (\tau_L, v_L)$, $u_R = (\tau_R, v_R)$ and s satisfying (4.4) so that $\tau_R > \tau_L$, $v_L > v_R$. For the system

$$(4.17) \quad D(u)u_x = \begin{pmatrix} -s(\tau - \tau_R) - (v - v_R) \\ p(\tau) - p(\tau_R) - s(v - v_R) \end{pmatrix} \equiv V(u)$$

we shall show a trajectory exists connecting u_L on the left to u_R on the right. From Theorem 2.2, u_R is a stable node for this system and u_L is a saddle point.

We now invoke some results of Conley-Smoller [1] and claim: If no periodic or homoclinic orbit exists encircling u_R , then one branch of the unstable manifold of u_L approaches u_R as $x \rightarrow \infty$. The results of [1] which are pertinent are a classification theorem for flows in the plane with two critical points, one a saddle, one a node (Lemma 4.1), and the existence of an "isolating disk" for the system (4.17) with a constant diffusion matrix (Lemma 5.1), which traps some branch of an invariant manifold of u_L inside it (Lemma 4.2). In the present situation, the isolating disk of Lemma 5.1 may be constructed to contain Ω in its interior, since $D(u)$ is constant exterior to Ω . We now introduce two functions

$$(4.18) \quad \Lambda_0 = p(\tau)(s(\tau - \tau_R) + v - v_R) - s(v^2/2 + P(\tau) - v(p(\tau_R) - sv_R))$$

$$\tilde{\Lambda} = P(\tau) - \tau p(\tau_R) - s(\tau - \tau_R)(v - v_R) - (v^2/2 - vv_R)$$

and define $\Lambda_\lambda = \Lambda_0 + \lambda \tilde{\Lambda}$. This Λ_λ coincides with the functional Λ which appears in Mock [12] if the entropy is taken to be E_λ . It has the property that

$$\nabla \Lambda_\lambda = \begin{pmatrix} c^2(\tau) & \lambda \\ \lambda & 1 \end{pmatrix} \nabla(u) = \nabla^2 E_\lambda \cdot \nabla(u)$$

Along any trajectory of (4.17), then,

$$\Lambda_\lambda(u)_x = \nabla(u) \cdot \nabla^2 E_\lambda D^{-1} \nabla(u)$$

So in any region where $\nabla^2 E_\lambda D$ is positive definite, Λ_λ is increasing along trajectories.

Note that from the first remark of section 4, $D(\tau, v)$ is diagonal exterior to Ω . It follows that Λ_0 increases along trajectories exterior to Ω , and that Λ_λ increases along trajectories in the strip $0 < \tau < \tau_1$ where $c(\tau_1) = |\lambda|$. (This strip contains Ω .) The phase portrait of (4.17) for D diagonal is shown in Fig. 1.

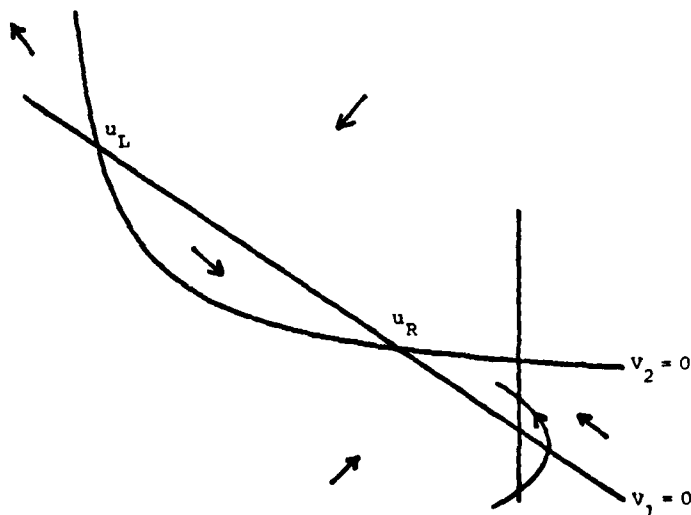


Figure 1. Phase portrait of (4.17) for diagonal D

We now consider two cases. First, suppose $\tau_R > \tau_1$. Then it is clear that no periodic or homoclinic orbit encircling u_R can exist, for it would have to intersect the vertical line $\tau = \tau_R$ in two places, but Fig. 1 shows that is impossible for a trajectory in the region $\tau > \tau_R$.

In the second case, $\tau_R < \tau_1$, no periodic or homoclinic orbit encircling u_R could lie entirely to the left of the line $\tau = \tau_1$, for Λ_λ increases on trajectories there. The remaining possibility is that part of the encircling orbit lag to the right of the line $\tau = \tau_1$. It can only do so if that part is one connected piece as indicated in Fig. 1. Let $u_- = (\tau_1, v_-)$ be the point of entry, $u_+ = (\tau_1, v_+)$ the point of exit. Then

$$\Lambda_0(u_+) - \Lambda_0(u_-) > 0 > \Lambda_\lambda(u_+) - \Lambda_\lambda(u_-)$$

if the encircling orbit exists. Since $\lambda = c(\tau_1)$, this implies

$$c(\tau_1)|\tilde{\Lambda}(u_+) - \tilde{\Lambda}(u_-)| > \Lambda_0(u_+) - \Lambda_0(u_-)$$

We will show this cannot hold, so the encircling orbit cannot exist. Now

$$\tilde{\Lambda}(u_+) - \tilde{\Lambda}(u_-) = (v_+ - v_-)(v_1 - (v_+ + v_-)/2)$$

where $v_1 - v_R = -s(\tau_1 - \tau_R)$. With $v_2 - v_R = (p(\tau_1) - p(\tau_R))/s$, observe that

$$v_- < v_1 < v_+ < v_2. \text{ Also}$$

$$\Lambda_0(u_+) - \Lambda_0(u_-) = s(v_+ - v_-)(v_2 - (v_+ + v_-)/2).$$

Then $v_2 - (v_+ + v_-)/2 > |v_1 - (v_+ + v_-)/2|$ and $s > c(\tau_R) > c(\tau_1)$, so the inequalities above cannot hold, concluding the proof of Theorem 4.2 for front shocks. For back shocks, replace v by $-v$, x by $-x$ in (4.17), reducing the connection problem to that for a front shock.

An Example: Strictly Stable, but Inadmissible in the Large

We give here a construction which shows that, despite the positive results above, the local condition of strict stability is not quite sufficient for global admissibility.

Proposition 4.3. Fix a front shock (τ_L, v_L) , (τ_R, v_R) with $c(\tau_L) > s > c(\tau_R) > 0$. There exists a smooth choice of $D(\tau, v)$, strictly stable at each point, such that the system of ODE's (4.17) for the p -system admits a closed periodic orbit encircling (τ_R, v_R) , excluding (τ_L, v_L) , so no trajectory can connect the two. We may choose $D \equiv I$ outside an annular region containing the periodic orbit.

Proof. We will make use of the strictly stable matrix function $\tilde{D}(u, w, \tilde{w})$ of Proposition 2.2. Observe that $D(u, w, w) = I$ (see appendix B). Of course, $u = (\tau, v)$. Our procedure is as follows:

a) We will exhibit a vector field $V_1(u)$ in an annular region encircling (τ_R, v_R) excluding (τ_L, v_L) which admits periodic orbits, and is also such that the pair $LV(u)$, $LV_1(u)$ satisfy condition (Q) of Proposition 2.2 at each point.

b) Then V and V_1 can be patched together by a partition of unity: Take a function $\psi(u)$ which is 1 on a periodic orbit and 0 outside the annular region, and let $\tilde{V} = \psi V_1 + (1 - \psi)V$.

c) By the remark concluding section 2, LV and $L\tilde{V}$ satisfy condition (Q) everywhere. Simply take $D^{-1}(u) = \tilde{D}(u, LV(u), L\tilde{V}(u))$.

It remains to perform step a). Because $u_R = (\tau_R, v_R)$ is a stable node for the vector field $V(u)$, the map $u \rightarrow w$ given by

$$w = -LV(u)$$

is locally invertible at $w = 0$ by the inverse function theorem. In the w -plane we consider the family of curves $w(\theta; r_0)$ in polar coordinates,

$$r(\theta, r_0) = (|\cos \theta - \theta_0|^p + |\sin \theta - \theta_0|^p)^{-1/p} r_0$$

for r_0 small, p and θ_0 fixed, $1 < p < 2$, $0 < \theta_0 < \pi/4$ (see Fig. 2)

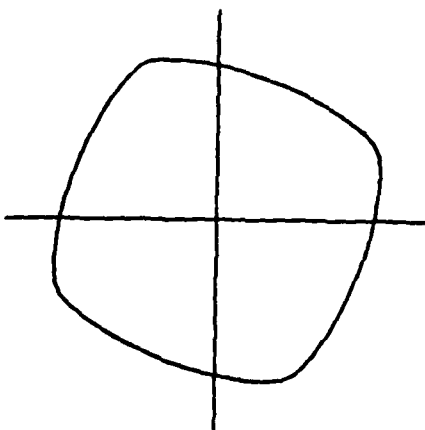


Figure 2

This curve is the boundary of a ball in the p -metric $|w|_p = (|w_1|^p + |w_2|^p)^{1/p}$ rotated through an angle θ_0 . It has the property that for each θ , the pair of vectors $-w(\theta)$, $\dot{w}(\theta)$ satisfy condition (Q). For r_0 sufficiently small, we may then obtain closed curves $u(\theta; r_0)$ encircling u_R via the isomorphism $u \leftrightarrow w$ defined above. Then

$$\dot{w}(\theta) = \frac{-\partial(LV)}{\partial u} \dot{u}(\theta) = \begin{bmatrix} s + c(\tau) & 0 \\ 0 & s - c(\tau) \end{bmatrix} + O(r_0) \dot{L}u(\theta; r_0)$$

There is a smooth choice of positive diagonal $S(\theta)$ (see appendix B) so that

$$-w^T S \dot{w}(\theta) > Cr_0^2 \text{ for all } \theta, C > 0 \text{ constant.}$$

With $\tilde{S} = S \cdot \text{diag}(s + c, s - c)$, $c = c(\tau(\theta; r_0))$ we have

$$LV(u(\theta)) \tilde{S} L \dot{u}(\theta) > cr_0^2 - O(r_0^3) > 0 \text{ if } r_0 \text{ is small.}$$

Therefore it suffices to take $v_1 = \dot{u}(\theta; r_0)$ in step a).

The Admissibility Criteria of Conley-Smoller and Strict Stability

Here we remark that under very general circumstances, application of the admissibility criteria of Conley-Smoller from [1] to one front shock and one back shock associated with a given value of τ automatically forces the diffusion matrix to satisfy a stronger requirement than strict stability. For simplicity in exposition we only state these results below for the paired front and back shocks described in (4.5), related through reflectional symmetry, and leave the obvious generalizations to the interested reader. We have

Proposition 4.4. Assume the admissibility criterion of Theorem 3.2 of [1] applies to both the front shock and back shock described in (4.5) for a fixed shock speed $s > 0$. Also assume the diffusion matrix D satisfies $D(\tau_R, v_R) = D(\tau_R, -v_R)$ - in particular any constant D always satisfies this requirement. Then D is strictly stable at (τ_R, v_R) and satisfies

$$|c(\tau_R) d_{12} + c(\tau_R)^{-1} d_{21}| < \frac{c(\tau_R)}{s} (d_{11} + d_{22}) < d_{11} + d_{22}$$

To apply Theorem 3.2 of [1] to a given front shock connecting (τ_L, v_L) to (τ_R, v_R) with speed $s > 0$ requires at (τ_R, v_R) ,

$$d_{12} s < d_{22}$$

$$\frac{s}{c^2} d_{21} < d_{11}$$

so that

$$d_{12}c + d_{21}c^{-1} < \frac{c}{s} (d_{11} + d_{22})$$

Similarly, connecting $(\tau_R, -v_R)$ to $(\tau_L, -v_L)$ with wave speed $-s$ requires by the same conditions that at $(\tau_R, -v_R)$

$$d_{12}c + d_{21}c^{-1} > -\frac{c}{s} (d_{11} + d_{22})$$

Since the entropy condition guarantees $c(\tau_R) < s$, the conclusion of Proposition 4.4 follows.

We also have

Proposition 4.5. Assume the admissibility criterion of Theorem 5.2 of [1] applies to both the front shock and back shock described in (4.5) for a fixed shock speed $s > 0$. Also assume the diffusion matrix D satisfies $D(\tau_L, v_L) = D(\tau_L, -v_L)$. Then D is strictly stable at (τ_L, v_L) and satisfies

$$|c(\tau_L)d_{12} + c(\tau_L)^{-1}d_{21}| < \frac{s}{c(\tau_L)} (d_{11} + d_{22})$$

First, we apply the admissibility criterion of Theorem 5.2 from [1] for the shock moving with speed $s > 0$; this requires that the trace of the matrix in (4.13) is negative at (τ_L, v_L) so that

$$cd_{12} + c^{-1}d_{21} < \frac{s}{c(\tau_L)} (d_{11} + d_{22})$$

Similarly, applying this criterion to the shock from (4.5) with speed $-s$ requires that the trace of the matrix in (4.13) is negative at $(\tau_L, -v_L)$ so that

$$cd_{12} + c^{-1}d_{21} > \frac{-s}{c(\tau_L)} (d_{11} + d_{22})$$

and these two inequalities together with the entropy condition $c(\tau_L) > s$ imply the conclusion of Proposition 4.5.

An Inadmissible Matrix on the Boundary of the Strictly Stable Viscosities

We consider the explicit choice of the matrix D given by

$$D(\tau) = \begin{pmatrix} 0 & 1 \\ -c^2(\tau) & 0 \end{pmatrix}$$

This matrix is associated with purely dispersive wave propagation for (1.5) since $LDR(\tau)$ is a skew symmetric matrix. Furthermore, D is on the boundary of the set of stable viscosity matrices since $D(\tau)$ is the limit as $\varepsilon \rightarrow 0$ of

$$D^\varepsilon(\tau) = \begin{pmatrix} \varepsilon & 1 \\ -c^2(\tau) & \varepsilon \end{pmatrix}$$

and $D^\varepsilon(\tau)$ is strictly stable because (4.10) is satisfied.

Fixing any shock $(\tau_L, v_L), (\tau_R, v_R), s$, it is easy to check that the function $\Lambda_0(\tau, v)$ of (4.18) is constant along trajectories of (4.17). Since $\Lambda_0(\tau_L, v_L) \neq \Lambda_0(\tau_R, v_R)$, no connection is possible.

Appendix A. Proof of Theorem 2.1.

We begin by developing some necessary criteria for a viscosity matrix D to be stable, i.e. for $D \in S(u_0)$. From (2.1) it follows that

$$(A.1) \quad \max_{\substack{0 < t < \infty \\ \xi \in \mathbb{R}}} |e^{tP(\xi)}| < C$$

for some fixed constant C , where $P(\xi) = -\xi^2 D - i\xi A$. This estimate can hold only if the eigenvalues of $P(\xi)$ have nonpositive real part for all real ξ . Using this principle, we can establish:

Proposition (A.1). Assume D is stable at u_0 ($D \in S(u_0)$). Then

- (1) The eigenvalues of D have nonnegative real part.
- (2) $\ell_k \text{Dr}_k(u_0) > 0$ for $k = 1, \dots, m$.
- (3) For any eigenvalue $\kappa_j(\xi)$ of $P(\xi)$,

$$\text{Re } \kappa_j(\xi) < 0, \quad j = 1, \dots, m.$$

Proof. From the discussion above, (3) is immediate. Define, for convenience,

$$B(\theta) = D \sin \theta + iA \cos \theta.$$

Eigenvalues $\mu_j(\theta)$ of $B(\theta)$ are related to eigenvalues $\kappa_j(\xi)$ of $P(\xi)$ by

$$\mu_j(\theta) \cdot (\tan \theta / \cos \theta) = -\kappa_j(\tan \theta) \quad \text{for } \theta \neq 0, \quad -\pi/2 < \theta < \pi/2.$$

From (3), and using continuity,

$$(A.2) \quad (\text{sgn } \theta) \text{Re } \mu_j(\theta) > 0, \quad -\pi/2 < \theta < \pi/2, \quad j = 1, \dots, m.$$

Setting $\theta = \pi/2$ we obtain (1). For (2), observe $B(0) = iA$ has distinct imaginary eigenvalues. Therefore, for small θ there exist smooth eigenvalues $\mu_k(\theta)$ and eigenvectors $R_k(\theta)$, with $\mu_k(0) = i\lambda_k(u_0)$, $R_k(0) = r_k(u_0)$, satisfying

$$(B(\theta) - \mu_k(\theta)R_k(\theta))R_k(\theta) = 0$$

Differentiate and set $\theta = 0$ ($B'(0) = D$). Then dot with $\ell_k(u_0)$. We obtain

$$(A.3) \quad \ell_k \text{Dr}_k(u_0) = \mu'_k(0)$$

Part (2) now follows using (A.2).

Proof of Theorem 2.1. We shall argue that (1) implies (2) implies (3) implies (1). Assume that D is in the interior of $S(u_0)$. Then for some $\delta_0 > 0$, $D - \delta_0 I$ is stable, i.e., in $S(u_0)$. The eigenvalues $\tilde{\kappa}_j(\xi)$ of $\tilde{P}(\xi) = -\xi^2(D - \delta_0 I) - i\xi A$ then satisfy

$$\operatorname{Re} \tilde{\kappa}_j(\xi) = \operatorname{Re} \kappa_j(\xi) + \delta_0 \xi^2 < 0$$

establishing (2).

It is not hard to show that if some part of condition (3) does not hold, then (2) cannot hold, by using scaling arguments as in the proof of Proposition A.1. Since the conditions in (3) are open conditions, to complete the proof it remains only to show that if conditions 3i) - 3iii) are satisfied, then D is stable, i.e. in $S(u_0)$. We will make use of one part of the Kreiss matrix theorem.

Theorem (Kreiss, 1959 [9]). Let a family of $m \times m$ square matrices be given. A necessary and sufficient condition that $C_1 > 0$ exist so that

$$\|e^{tA}\| < C_1$$

for all $t > 0$ and all A in the family, is

(K3) There exist constants C_{31} and C_{32} and a matrix $S(A)$ for each A in the family, with $\max(\|S\|, \|S^{-1}\|) < C_{31}$, so that

$$SAS^{-1} = \begin{bmatrix} \mu_1 & b_{12} & \dots & b_{1m} \\ 0 & \mu_2 & \dots & b_{2m} \\ \dots & \dots & \dots & \dots \\ 0 & \dots & 0 & \mu_m \end{bmatrix}$$

is upper triangular, with

$$(A.4) \quad \operatorname{Re} \mu_1 < \dots < \operatorname{Re} \mu_m < 0$$

and

$$(A.5) \quad |b_{ij}| < C_{32} |\operatorname{Re} \mu_j| \quad \text{for } i < j$$

Assume D satisfies conditions 3i) - 3iii). We shall verify the condition (K3) for the family of matrices $\{P(\xi) | \xi \in \mathbb{R}\}$, or what is the same, because of a positive scaling factor, for the bounded family $\{-\sin \theta B(\theta) | -\pi/2 < \theta < \pi/2\}$.

We begin by using condition ii), constructing a suitable S for θ near 0. From the proof of A.1, the matrix $B(\theta)$ may be diagonalized by a matrix $R(\theta)$ of right eigenvectors for $|\theta|$ small (so $S^{-1} = R(\theta)$, and $b_{ij} = 0$) and its distinct eigenvalues $\mu_k(\theta)$ satisfy $\mu_k'(\theta) = \frac{1}{k} \operatorname{Dr}_k(u_0) > 0$, so for $|\theta| < \theta_0$, we have $-\sin \theta \mu_k(\theta) < 0$.

For $\theta_0 < |\theta| < \pi/2$, we may choose a unitary matrix $S(\theta)$ which puts $-\sin \theta B(\theta)$ into upper triangular form satisfying (A.4), by Schur's theorem (or see Richtmyer and Morton [14], p. 77). The eigenvalues $\tilde{\mu}_j(\theta)$ of $-\sin \theta B(\theta)$ are continuous and never touch the imaginary axis for $\theta_0 < |\theta| < \pi/2$ by conditions i) and iii). Therefore $|\operatorname{Re} \tilde{\mu}_j(\theta)| \geq \mu_0 > 0$ for $\theta_0 < |\theta| < \pi/2$. But the off-diagonal elements of $S(-\sin \theta B)S^{-1}(\theta)$ are uniformly bounded, since S is unitary and $B(\theta)$ bounded. So (K3) holds, and Theorem 2.1 is established.

Appendix B: Proof of Proposition 2.3.

Consider the converse part first. If D is strictly stable, there exists a positive diagonal $\tilde{S}$ such that $\tilde{S}^{-1}LDR\tilde{S}$ is positive definite, by 2.2. Then if w is nonzero,

$$0 < (\tilde{S}^{-1}w)^T \tilde{S}^{-1}LDR\tilde{S}(\tilde{S}^{-1}w) = w^T \tilde{S}^{-2}LDRw,$$

so w and $LDRw$ satisfy condition (Q).

Now assume w and $\tilde{w}$, nonzero, satisfy (Q). Then there exists a rotation matrix

$$O(\theta) = \begin{pmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{pmatrix}, \text{ with } |\theta| < \pi/2, \text{ and a constant } c > 0, \text{ such that}$$

$\tilde{w} = cO(\theta)Sw$. With $L\tilde{D}R = cO(\theta)S$, $\tilde{D}$ is strictly stable, by 2.1(3), since $\cos \theta > 0$. In order to show that $\tilde{D}$ may be chosen smoothly, it suffices to show that S , depending on $w, \tilde{w}$, may be chosen smoothly.

Let $S(t) = \text{diag}(t, 2-t)$. We shall show that t may be chosen as a smooth function of the angles $\theta = \arg w$, $\tilde{\theta} = \arg \tilde{w}$ in the proper subdomain of the torus $S^1 \times S^1$. In Figure 3 below, the torus is divided into 16 square patches

$(k\frac{\pi}{2}, (k+1)\frac{\pi}{2}) \times (\tilde{k}\frac{\pi}{2}, (\tilde{k}+1)\frac{\pi}{2})$ indicating regions in which w and $\tilde{w}$ lie in given quadrants. The domain is the open, connected set indicated by shading.

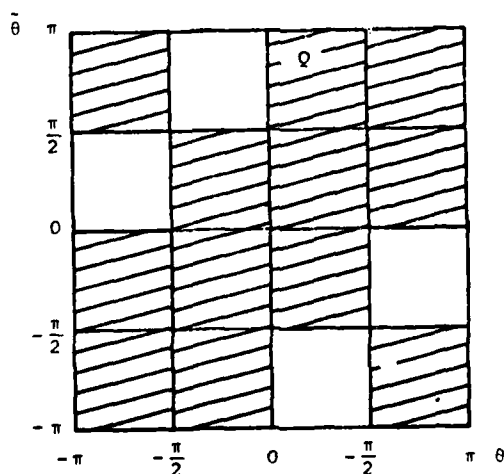


Figure 3. Domain of $t(\theta, \tilde{\theta})$ in $S^1 \times S^1$

Define $t(\theta, \tilde{\theta})$ as follows: If $(\theta, \tilde{\theta})$ lies in a square on the main diagonal (so $k = \tilde{k}$, i.e., w and $\tilde{w}$ lie in the same quadrant), define $t(\theta, \tilde{\theta}) = 1$, so $S(t) = I$. Consider a particular patch Q off the main diagonal, $Q = (0, \frac{\pi}{2}) \times (\frac{\pi}{2}, \pi)$. Let $w, \tilde{w}$ be given, with $(\theta, \tilde{\theta}) \in Q$. In order that condition (Q) above be satisfied with $S = S(t)$, we must have $t(\theta, \tilde{\theta}) < t_c$ where $\tilde{w}^T S(t_c) w = 0$, i.e., $\tilde{w}_1 w_1 t_c + (2 - t_c) \tilde{w}_2 w_2 = 0$ or

$$\frac{t_c}{2 - t_c} = -\tan \tilde{\theta} \tan \theta \equiv T(\theta, \tilde{\theta}). \text{ Thus } t_c = \frac{2T}{1 + T}$$

Simply take $t(\theta, \tilde{\theta}) = t(T)$ as any C^∞ function of T on the interval $(0, \infty)$ such that $t(T) < t_c$ and $t(T) = 1$ for T sufficiently large. Other patches off the main diagonal are treated similarly, so a smooth $t(\theta, \tilde{\theta})$ may be defined as required. This concludes the proof of Proposition 2.3.

REFERENCES

- [1] C. Conley and J. Smoller, Viscosity matrices for two-dimensional nonlinear hyperbolic systems, *Comm. Pure Appl. Math.*, 23 (1970) 876-884.
- [2] C. Conley and J. Smoller, Shock waves as limits of progressive wave solutions of higher order equations, II, *Comm. Pure Appl. Math.*, 25 (1972) 133-146.
- [3] J. Conlon, A theorem in ordinary differential equations with an application to hyperbolic conservation laws, *Advances in Math.*, 35 (1980) 1-18.
- [4] L. Foy, Steady state solutions of conservation laws with viscosity terms, *Comm. Pure Appl. Math.*, 17 (1964) 177-188.
- [5] I. M. Gelfand, Some problems in the theory of quasilinear equations, *Usp. Mat. Nauk.*, 14 (1959) 87-158. English translation in *Amer. Math. Soc. Trans.*, Ser. 2, No. 29 (1963).
- [6] A. Kelley, The stable, center-stable, center, center-unstable, and unstable manifolds in *Transversal Mappings and Flows* by R. Abraham and J. Robbin, Benjamin, New York 1967.
- [7] A. Kelley, Stability of the center-stable manifold, *J. Math. Anal. Appl.*, 18 (1967) 336-344.
- [8] N. Kopell and L. N. Howard, Bifurcations and trajectories joining critical points, *Advances in Math.*, 18 (1975) 306-358.
- [9] H. O. Kreiss, Über matrizen die beschränkte halbgruppen erzeugen, *Math. Scand.*, 7 (1959) 71-80.
- [10] P. D. Lax, Hyperbolic systems of conservation laws, II, *Comm. Pure Appl. Math.*, 10 (1957) 537-566.
- [11] T.-P. Liu, The entropy condition and the admissibility of shocks, *J. Math. Anal. Appl.*, 53 (1976) 78-88.
- [12] M. S. Mock, A topological degree for orbits connecting critical points of autonomous systems, *J. Diff. Eqns.*, 38 (1980) 176-191.
- [13] R. Pego, Stable viscosities and shock profiles for systems of conservation laws, (to appear)

- [14] R. D. Richtmyer and K. W. Morton, *Difference Methods for Initial-Value Problems*,
2nd ed., Wiley (Interscience), 1967.

AM/RP/ed

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 2491	2. GOVT ACCESSION NO. AD-A127 759	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) STABLE VISCOSITY MATRICES FOR SYSTEMS OF CONSERVATION LAWS		5. TYPE OF REPORT & PERIOD COVERED Summary Report - no specific reporting period
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Andrew Majda and Robert Pego		8. CONTRACT OR GRANT NUMBER(s) MCS-7927062, Mod. 2 DAAG29-80-C-0041 MCS-81-02360, 483964-25530
9. PERFORMING ORGANIZATION NAME AND ADDRESS Mathematics Research Center, University of 610 Walnut Street Wisconsin Madison, Wisconsin 53706		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Work Unit Number 1 - Applied Analysis
11. CONTROLLING OFFICE NAME AND ADDRESS (See Item 18)		12. REPORT DATE March 1983
		13. NUMBER OF PAGES 39
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES U. S. Army Research Office P. O. Box 12211 Research Triangle Park North Carolina 27709 National Science Foundation Washington, DC 20550		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Shock profiles, viscosity matrices, traveling waves, center manifold		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) We study a natural class of appropriate viscosity matrices for strictly hyperbolic systems of conservation laws in one space dimension, $u_t + f(u)_x = 0$, $u \in \mathbb{R}^m$. These matrices are <u>admissible</u> in the sense that small amplitude shock wave solutions of the hyperbolic system are shown to be		

ABSTRACT (cont.)

limits of smooth traveling wave solutions of the parabolic system

$u_t + f(u)_x = v(Du_x)_x$ as $v \rightarrow 0$ if D is in this class. The class is determined by a linearized stability requirement: The Cauchy problem for the equation $u_t + f'(u_0)u_x = vDu_{xx}$ should be well posed in L^2 uniformly in v as $v \rightarrow 0$. Previous examples of inadmissible viscosity matrices are accounted for through violation of the stability criterion.

END

DATE
FILMED

5 - 83

DTIC