

AD- A136824


ADF 300362

MEMORANDUM REPORT ARBRL-MR-03325
(Supersedes IMR No. 794)

PRESSURE MEASUREMENTS IN A RAPIDLY
ROTATING AND CONING, HIGHLY
VISCIOUS FLUID

Michael J. Nusca
William P. D'Amico
William G. Beims

November 1983



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER
BALLISTIC RESEARCH LABORATORY
ABERDEEN PROVING GROUND, MARYLAND

Approved for public release; distribution unlimited.

20030108212

83 12 23 017

DTIC FILE COPY

REPRODUCTION QUALITY NOTICE

This document is the best quality available. The copy furnished to DTIC contained pages that may have the following quality problems:

- **Pages smaller or larger than normal.**
- **Pages with background color or light colored printing.**
- **Pages with small type or poor printing; and or**
- **Pages with continuous tone material or color photographs.**

Due to various output media available these conditions may or may not cause poor legibility in the microfiche or hardcopy output you receive.

☐ **If this block is checked, the copy furnished to DTIC contained pages with color printing, that when reproduced in Black and White, may change detail of the original copy.**

(This document contains
blank pages that were
not filmed)

REPRODUCTION QUALITY NOTICE

This document is the best quality available. The copy furnished to DTIC contained pages that may have the following quality problems:

- **Pages smaller or larger than normal.**
- **Pages with background color or light colored printing.**
- **Pages with small type or poor printing; and or**
- **Pages with continuous tone material or color photographs.**

Due to various output media available these conditions may or may not cause poor legibility in the microfiche or hardcopy output you receive.

☐ **If this block is checked, the copy furnished to DTIC contained pages with color printing, that when reproduced in Black and White, may change detail of the original copy.**

Destroy this report when it is no longer needed.
Do not return it to the originator.

Additional copies of this report may be obtained
from the National Technical Information Service,
U. S. Department of Commerce, Springfield, Virginia
22161.

The findings in this report are not to be construed as
an official Department of the Army position, unless
so designated by other authorized documents.

*The use of trade names or manufacturers' names in this report
does not constitute endorsement of any commercial product.*

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER MEMORANDUM REPORT ARBRL-MP-03325	2. GOVT ACCESSION NO. AD-A136824	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PRESSURE MEASUREMENTS IN A RAPIDLY ROTATING AND CONING, HIGHLY VISCOUS FLUID		5. TYPE OF REPORT & PERIOD COVERED Final
7. AUTHOR(s) Michael J. Nusca William P. D'Amico William G. Beims		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Ballistic Research Laboratory, ARDC ATTN: DRSMC-BLL(A) Aberdeen Proving Ground, Maryland 21005		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS US Army AMCCOM, ARDC Ballistic Research Laboratory, ATTN:DRSMC-BLA-S(A) Aberdeen Proving Ground, Maryland 21005		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS RDT&E 1L162618AH80
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE November 1983
		13. NUMBER OF PAGES 16
		15. SECURITY CLASS. (of this report)
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This report supersedes IMR 794, dated September 1983.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Coning Motion Gyroscope Experiments Liquid-Filled Gyroscopes Low Reynolds Number Rotating Liquids		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) (bja) The pressure on the endwall of a rapidly rotating and coning liquid-filled cylinder was measured. A gyroscope was used to generate the spin and coning motion. The Reynolds number based upon the radius, gyroscope spin, and liquid kinematic viscosity was 8.8.		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION.....	5
II. DESCRIPTION OF EXPERIMENT.....	5
Table 1. Voltage Measurement Relationships (Ref. 8).....	7
III. EXPERIMENTAL RESULTS.....	7
Table 2. Test Conditions.....	8
Table 3. Experimental Results.....	8
IV. SUMMARY.....	9
REFERENCES.....	13
DISTRIBUTION LIST.....	15



Accession For	
DTIC GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/ _____	
Availability Codes	
Dist	Special
A-1	

I. INTRODUCTION

Most of the research conducted on the stability and motion of spinning liquid-filled containers is for cases where the rotational force is much larger than the viscous force, i.e., high Reynolds number flows. The Reynolds number is defined as $Re = a^2 \dot{\phi} / \nu$, where a is the radius of the cylinder, $\dot{\phi}$ is the spin, and ν is the liquid kinematic viscosity. Yawsonde-instrumented projectiles have exhibited large yaw and rapid despin for small Reynolds (Re) numbers: $10 < Re < 50$.^{1,2,3,4} D'Amico has used a gyroscope to determine the liquid-induced yaw moment for $5 < Re < 12,000$.⁵ Also, Miller has used a spin fixture to determine the liquid-induced roll moment for low Reynolds number.⁶ This study supplements previous low Reynolds number research efforts by reporting pressure measurements. Unlike previous efforts where integral effects such as yaw or despin moments were measured, the pressure measurements provide a basis for fundamental comparisons with analytical or numerical methods for low Reynolds number rotating flows.

II. DESCRIPTION OF EXPERIMENT

The coning device used by Whiting, shown in Figures 1a and 1b, was used in these experiments.⁷ A detailed description of the pressure measurement

1. W. P. D'Amico and M. C. Miller, "Flight Instability Produced by a Rapidly Spinning, Highly Viscous Liquid," Journal of Spacecraft and Rockets, Vol. 16, No. 1, January-February 1979, pp. 62-64.
2. W. P. D'Amico, W. H. Clay, and A. Mark, "Diagnostic Tests for Wick-Type Payloads and Highly Viscous Liquids," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-02913, April 1979 (AD A072812).
3. W. P. D'Amico and W. H. Clay, "High Viscosity Liquid Payload Yawsonde Data for Small Launch Yaws," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-03029, June 1980 (AD A088411).
4. W. P. D'Amico and R. J. Yalamanchili, "Yawsonde Tests of the 8-Inch XM877 Binary Projectile: Phase I," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL report in publication.
5. W. P. D'Amico, "Instabilities of a Gyroscope Produced by Rapidly Rotating Highly Viscous Liquids," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-03285, June 1983 (AD A130974).
6. Miles C. Miller, "Flight Instabilities of Spinning Projectiles Having Non-Rigid Payloads," Journal of Guidance, Control, and Dynamics, Vol. 5, March-April 1982, pp. 151-157.
7. Richard D. Whiting, "An Experimental Study of Forced Asymmetric Oscillations in a Rotating Liquid-Filled Cylinder," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Technical Report ARBRL-TR-02376, October 1981 (AD A107948).

system and the data reduction is located in Reference 7, but a review will be made here. The cylinder was filled to 100% with a silicon oil (kinematic viscosity (ν) of 60,000 cs and density (ρ) of 0.979 gm/cc), and all spinning parts were dynamically balanced. The rotor was inclined to the vertical at a known angle (ϵ) and held in place by a bushing that rested in a cam which was driven by a DC motor. The cylinder was spun by a DC motor (83.3 Hz), and the liquid was allowed to achieve a rigid body rotation. For a preselected precession frequency, sufficient time was allowed for a steady coning motion to occur. Hence, the cylinder is in constant angle, steady coning motion. The oscillatory, steady state pressures of the liquid were then measured. Two miniature pressure transducers were embedded into an insert that formed the bottom endwall of the cylinder which was located within the rotor. These transducers measured the absolute pressure of the liquid within the cylinder.

Figure 2 provides a schematic of the pressure measurement/telemetry system. The voltage outputs from the pressure transducers were amplified for telemetry. The gain of the amplifiers was typically 700 for frequencies between 50-100 Hz. The amplified outputs were in turn fed to voltage controlled oscillators (VCO's or subcarrier oscillators), mixed, and telemetered by a 250 MHz transmitter. The amplified pressure signals were recovered by using a receiver and two discriminators. It would then have been possible to digitize the data. However, since it was anticipated that the pressure response would be sinusoidal, a spectrum analyzer was used to determine frequency and amplitude components. A Hewlett-Packard 3582A spectrum analyzer was used. The output of the analyzer (which is volts rms) was read by a Hewlett-Packard 9845B computer via an IEEE-488 instrument bus and stored for further processing. The data were converted from volts rms to volts, rescaled by the amplifier gain, and translated into pressure by a previously determined calibration. Table 1 establishes terminology and conventions for pressure amplitudes.⁸ Previous comparisons between computed pressures by Murphy⁹ and Gerber et al¹⁰ for high Reynolds numbers and this measurement system have been consistent.

-
8. J. D. Lenk, *Handbook of Practical Electronic Tests and Measurements*, Prentice-Hall Inc., Englewood Cliffs, New Jersey, 1969.
 9. Charles H. Murphy, "Angular Motion of a Spinning Projectile With a Viscous Liquid Payload," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-03194, August 1982, AD A118676. (See also *Journal of Guidance, Control, and Dynamics*, Vol. 6, July-August 1983, pp. 280-296.)
 10. N. Gerber, R. Sedney, and J. M. Bartos, "Pressure Moment on a Liquid-Filled Projectile: Solid Body Rotation," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Technical Report ARBRL-TR-02422, October 1982 (AD A120567).

TABLE 1. VOLTAGE MEASUREMENT RELATIONSHIPS (REF. 8)

Given +	Average	Effective (RMS)	Peak	Peak-to-Peak
Average	-----	1.11	1.57	3.14
Effective (RMS)	0.900	----	1.411	2.831
Peak	0.637	0.707	-----	2.00
Peak-to-Peak	0.3181	0.3541	0.500	-----

For the present set of experiments, pressures were measured from a single transducer (radial location of 21.2 mm). The coning angle was fixed at 2.00 degrees. The direction of the precession is controllable. A positive sense is considered to be in the direction of spin, which is typical for spin-stabilized projectiles, but data were taken for both positive and negative senses. The spin rate was held constant, while the coning frequency (and direction) were varied. The ratio of the coning frequency to the spin frequency is defined as τ and had the following range: $-0.15 < \tau < 0.15$. A single cylinder with a height and diameter of 19.99 cm and 6.35 cm, respectively, was used (aspect ratio $(c/a) = 3.148$).

III. EXPERIMENTAL RESULTS

The experimental conditions and results are listed in Tables 2 and 3. Results are plotted in Figure 3 for pressure coefficient versus τ . Pressures and pressure coefficients were obtained as follows:

$$P(\text{dynes/cm}^2) = \frac{\text{Amplitude}(v \text{ rms}) \times (1.411 v/v \text{ rms}) \times \text{Pressure Calibration (dynes/cm}^2)}{\text{Amplifier Gain}}$$

and

$$C_p = \frac{P(\text{dynes/cm}^2)}{\epsilon \rho a^2 \dot{\phi}^2}$$

TABLE 2. TEST CONDITIONS

Spin	= 83.3 Hz
Coning angle	= 2.00 degrees
Fill ratio	= 100%
Cylinder height	= 19.99 cm
Cylinder diameter	= 6.35 cm
Nominal fluid viscosity	= 60,000 cs
Nominal fluid density	= 0.979 gm/cc
Pressure calibration	= 0.2232 psi/mv
	= 69.75 dynes/cm ² /mv
Amplifier gain	= 710.0

TABLE 3. EXPERIMENTAL RESULTS

Spin Period (ms)	Coning Period (ms)	τ	Amplitude (volts rms)	Pressure (dynes/cm ²)	C_p
12.0	84.00	.1429	.494	1.51×10^4	.160
12.0	90.00	.1333	.460	1.41×10^4	.149
12.0	100.00	.1200	.411	1.26×10^4	.133
12.0	120.00	.1000	.332	1.02×10^4	.107
12.0	150.00	.0800	.261	8.00×10^3	.084
12.0	175.00	.0686	.226	6.93×10^3	.073
12.0	-240.00	-.0500	.144	4.41×10^3	.047
12.0	-200.00	-.0600	.170	5.21×10^3	.055
12.0	-175.00	-.0686	.193	5.92×10^3	.062
12.0	-150.00	-.0800	.217	6.65×10^3	.070
12.0	-120.00	-.1000	.267	8.18×10^3	.086
12.0	-100.00	-.1200	.317	9.72×10^3	.103
12.0	-90.00	-.1333	.345	1.06×10^4	.112
12.0	-84.00	-.1429	.371	1.14×10^4	.120

The data in Figure 3 indicate that C_p varies linearly with τ . The data has been fit with the following results: prograde motion $C_p = 1.153 \tau + .008$, retrograde motion $C_p = 0.7823 \tau + .008$. This response curve is not typical for high Reynolds numbers rotating flows. Typically, rotating liquids support waves and an interaction between a wave frequency (an eigenfrequency) and the coning frequency produce a resonant type response where the pressure (and resulting destabilizing moments) become large over a very small range of τ . Response curves similar to Figure 3 were observed by D'Amico for $10 < Re < 100$ for yaw moments. Murphy⁹ has suggested that both low and high Reynolds number response stem from the same phenomena. For low Reynolds numbers, however, large viscous dissipation flattens the response curve over the experimental range of coning frequencies and yields a seemingly linear behavior for small τ . Such a conjecture may be difficult to investigate analytically, since rapid coning frequencies are difficult to achieve. However, this thesis could be tested using three dimensional, incompressible Navier-Stokes codes that are currently under development.¹¹

IV. SUMMARY

The pressure on the endwall of a rapidly rotating and coning cylinder was measured for a Reynolds number of 8.8. Prograde and retrograde coning motion yielded pressure coefficients that varied linearly with the dimensionless coning frequency. These are the only pressure data that are available for a direct comparison with analytical or numerical methods at low Reynolds number. Previously, only yaw or despin moments were measured.

11. S. R. Chakravarthy, "Upwind Schemes for the Navier-Stokes Equations Governing Fluid Motion in Spinning Shells," BRL Contractor report in publication.

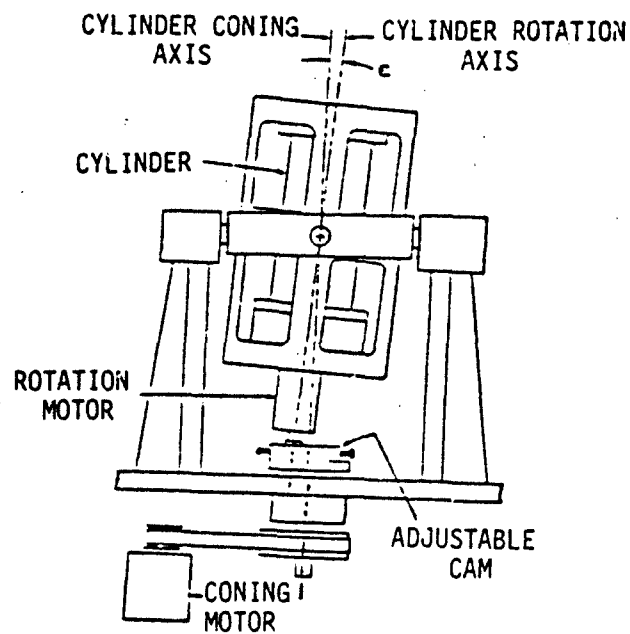


Figure 1a. Test Apparatus.

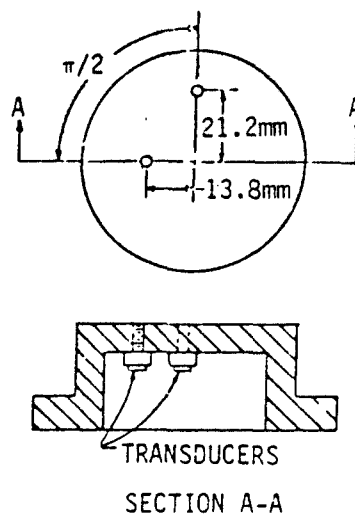


Figure 1b. Placement of Pressure Transducers.

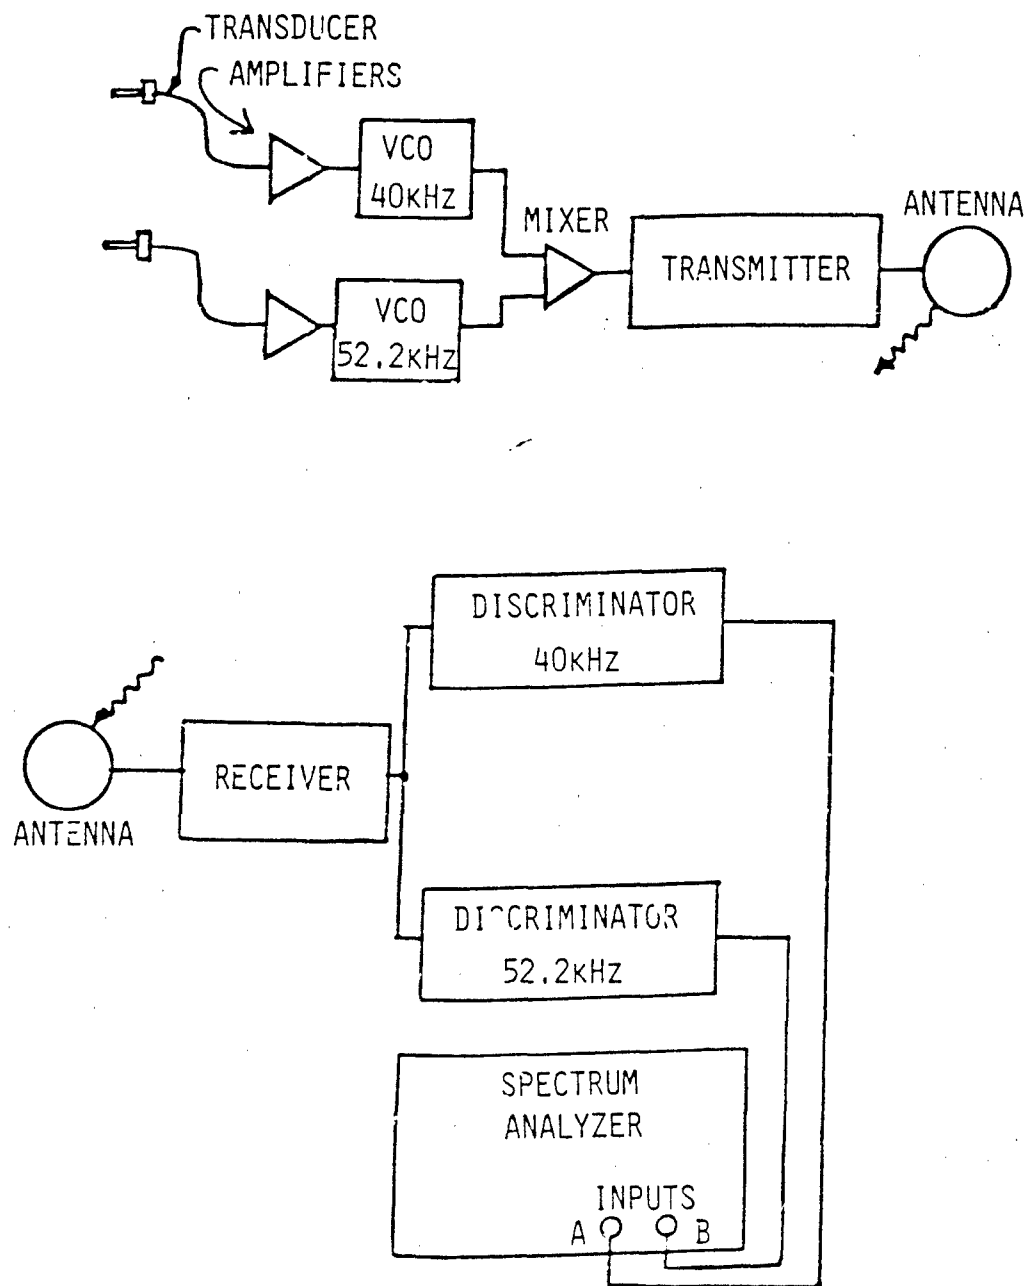


Figure 2. Schematic of Experimental Hardware for Pressure Measurement.

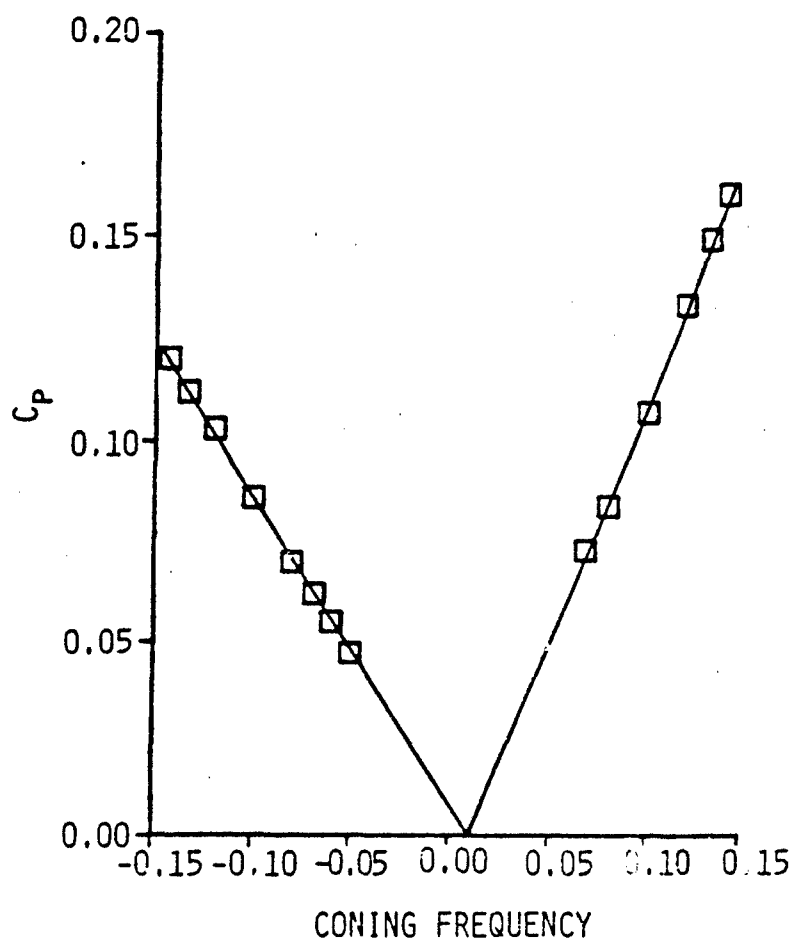


Figure 3. Pressure Coefficient Versus Coning Frequency for $Re = 8.8$.

REFERENCES

1. W. P. D'Amico and M. C. Miller, "Flight Instability Produced by a Rapidly Spinning, Highly Viscous Liquid," Journal of Spacecraft and Rockets, Vol. 16, No. 1, January-February 1979, pp. 62-64.
2. W. P. D'Amico, W. H. Clay, and A. Mark, "Diagnostic Tests for Wick-Type Payloads and Highly Viscous Liquids," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-02913, April 1979 (AD A072812).
3. W. P. D'Amico and W. H. Clay, "High Viscosity Liquid Payload Yawsonde Data for Small Launch Yaws," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-03029, June 1980 (AD A088411).
4. W. P. D'Amico and R. J. Yalamanchili, "Yawsonde Tests of the 8-Inch XM877 Binary Projectile: Phase I," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL report in publication.
5. W. P. D'Amico, "Instabilities of a Gyroscope Produced by Rapidly Rotating Highly Viscous Liquids," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-03285, June 1983 (AD A130874).
6. Miles C. Miller, "Flight Instabilities of Spinning Projectiles Having Non-Rigid Payloads," Journal of Guidance, Control, and Dynamics, Vol. 5, March-April 1982, pp. 151-157.
7. Richard D. Whiting, "An Experimental Study of Forced Asymmetric Oscillations in a Rotating Liquid-Filled Cylinder," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Technical Report ARBRL-TR-02376, October 1981 (AD A107948).
8. J. D. Lenk, Handbook of Practical Electronic Tests and Measurements, Prentice-Hall, Inc., Englewood Cliffs, New Jersey, 1969.
9. Charles H. Murphy, "Angular Motion of a Spinning Projectile With a Viscous Liquid Payload," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Memorandum Report ARBRL-MR-03194, August 1982, AD A118676. (See also Journal of Guidance, Control, and Dynamics, Vol. 6, July-August 1983, pp. 280-286.)
10. N. Gerber, R. Sedney, and J. M. Bartos, "Pressure Moment on a Liquid-Filled Projectile: Solid Body Rotation," US Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Technical Report ARBRL-TR-02422, October 1982 (AD A120567).
11. S. R. Chakravarthy, "Upwind Schemes for the Navier-Stokes Equations Governing Fluid Motion in Spinning Shells," BRL Contractor report in publication.

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
12	Administrator Defense Technical Information Center ATTN: DTIC-DDA Cameron Station Alexandria, VA 22314	1	Commander US Army Armament, Munitions and Chemical Command ATTN: DRSMC-LEP-L(R) Rock Island, IL 61299
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDMD-ST 5001 Eisenhower Avenue Alexandria, VA 22333	1	Director Benet Weapons Laboratory Armament R&D Center US Army AMCCOM ATTN: DRSMC-LCB-TL(D) Watervliet, NY 12189
1	Commander Armament R&D Center US Army AMCCOM ATTN: DRSMC-TDC(D) Dover, NJ 07801	1	Commander US Army Aviation Research and Development Command ATTN: DRDAV-E 4300 Goodfellow Blvd St. Louis, MO 63120
2	Commander Armament R&D Center US Army AMCCOM ATTN: DRSMC-TSS(D) Dover, NJ 07801	1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035
1	Commander Armament R&D Center US Army AMCCOM ATTN: DRSMC-LC(D) Dr. J. T. Frasier Dover, NJ 07801	1	Commander US Army Communications Research and Development Command ATTN: DRSEL-ATDD Fort Monmouth, NJ 07703
1	Commander Armament R&D Center US Army AMCCOM ATTN: DRSMC-CAWS-AM(D) Mr. DellaTerga Dover, NJ 07801	1	Commander US Army Electronics Research and Development Command Technical Support Activity ATTN: DELSD-L Fort Monmouth, NJ 07703
2	Commander Armament R&D Center US Army AMCCOM ATTN: DRSMC-LCA-F(D) Mr. D. Mertz Mr. A. Loeb Dover, NJ 07801	1	Commander US Army Missile Command ATTN: DRSMI-R Redstone Arsenal, AL 35898
		1	Commander US Army Missile Command ATTN: DRSMI-YDL Redstone Arsenal, AL 35898

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commander US Army Tank Automotive Command ATTN: DRSTA-TSL Warren, MI 48090	2	Director Sandia Laboratories ATTN: Mr. H. R. Vaughn Dr. W. Uberkamp Albuquerque, NM 87115
1	Director US Army TRADUC Systems Analysis Activity ATTN: ATAA-SL White Sands Missile Range NM 88002	<u>Aberdeen Proving Ground</u> Director, USAMSAA ATTN: DRXS-D DRXS-MP, Mr. H. Cohen	
2	Director US Army Dugway Proving Ground ATTN: STEDP-MT Dugway, UT 84022	Commander, USATECOM ATTN: URSTE-TU-F URSTE-CM-F Mr. Gibson (2 cys)	
1	Commander US Army Yuma Proving Ground ATTN: STEYP-MTW MAJ. S. Thorlin Yuma, AZ 85365	PM-SMOKE ATTN: DRCPM-SMK-M (MAJ Gober)	
1	Commandant US Army Field Artillery School ATTN: ATSF-CD-MW LT Bryan Ft. Sill, OK 73503	Commander, CRDC, AMCCOM ATTN: DRSMC-CLN Mr. W. Dee Mr. G. Jeffers	
1	Commandant US Army Field Artillery School ATTN: ATZR-BU-WT CPT Dawson Ft. Sill, OK 73503	Commander, CRDC, AMCCOM ATTN: DRSMC-CLK-PA Mr. M. C. Miller DRSMC-CLJ-L DRSMC-CLB-PA DRSMC-CLN	
2	Commandant US Army Infantry School ATTN: ATSH-CD-CSO-OR Fort Benning, GA 31905		
1	AFWL/SUL Kirtland AFB, NM 87117		

USER EVALUATION OF REPORT

Please take a few minutes to answer the questions below; tear out this sheet, fold as indicated, staple or tape closed, and place in the mail. Your comments will provide us with information for improving future reports.

1. BRL Report Number _____

2. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which report will be used.)

3. How, specifically, is the report being used? (Information source, design data or procedure, management procedure, source of ideas, etc.) _____

4. Has the information in this report led to any quantitative savings as far as man-hours/contract dollars saved, operating costs avoided, efficiencies achieved, etc.? If so, please elaborate.

5. General Comments (Indicate what you think should be changed to make this report and future reports of this type more responsive to your needs, more usable, improve readability, etc.) _____

6. If you would like to be contacted by the personnel who prepared this report to raise specific questions or discuss the topic, please fill in the following information.

Name: _____

Telephone Number: _____

Organization Address: _____

FOLD HERE

Director
US Army Ballistic Research Laboratory
ATTN: DRSMC-BLA-S (A)
Aberdeen Proving Ground, MD 21005



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON, DC
POSTAGE WILL BE PAID BY DEPARTMENT OF THE ARMY

Director
US Army Ballistic Research Laboratory
ATTN: DRSMC-BLA-S (A)
Aberdeen Proving Ground, MD 21005

FOLD HERE