

FD-3138 042


COMPARISON OF REAL-EAR ATTENUATION CHARACTERISTICS OF
THE STANDARD SPH-4. (U) ARMY AEROMEDICAL RESEARCH LAB
FORT RUCKER AL B T MOZO ET AL. DEC 83 USAARL-84-2


1/1

UNCLASSIFIED

F/G 6/17

NL





MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

12

ADA138042



USAARL REPORT NO. 84-2

**COMPARISON OF REAL-EAR ATTENUATION
CHARACTERISTICS OF THE STANDARD
SPN-4 EARCUP AND A PROTOTYPE
CRUSHABLE EARCUP**

By
Ben T. Mozo
William R. Nelson, MAJ, MSC

SENSORY RESEARCH DIVISION

DTIC
ELECTE
S FEB 17 1984
A

December 1983

**U.S. ARMY AEROMEDICAL RESEARCH LABORATORY
FORT RUCKER, ALABAMA 36362**

This document has been approved
for public release and sale; its
distribution is unlimited.

DTIC FILE COPY

USAARL

84 02 17 002

NOTICE

Qualified Requesters

Qualified requesters may obtain copies from the Defense Technical Information Center, Cameron Station, Alexandria, Virginia, 22314. Orders will be expedited if placed through the librarian or other person designated to request documents from the Defense Technical Information Center.

Change of Address

Organizations receiving reports from the US Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

Disclaimer

The views, opinions, and/or findings contained in this report are those of the authors and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

Human Use

Human subjects participated in these studies after giving free and informed voluntary consent. Investigators adhered to AR 70-25 and USAMRDC Reg 70-25 on Use of Volunteers in Research.

Reviewed:


BRUCE C. LEIBRECHT, Ph.D.
MAJ, MS
Director, Sensory Research Division

Released for Publication:


J.D. LaMOthe, Ph.D.
LTC, MS
Chairman, Scientific Review
Committee


DUDLEY R. PRICE
Colonel, MC, SFS
Commanding

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER USAARL Report No. 84-2	2. GOVT ACCESSION NO. AD-A138042	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Comparison of Real-Ear Attenuation Characteristics of the Standard SPH-4 Earcup and a Prototype Crushable Earcup		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) Ben T. Mozo and William R. Nelson, MAJ, MSC		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Sensory Research Division US Army Aeromedical Research Laboratory Fort Rucker, AL 36362		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Medical Research and Development Command Fort Detrick Frederick, MD 21701		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62777A, 3E162777A878, AC, 135
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE December 1983
		13. NUMBER OF PAGES 20
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Earcup, Helmet, Ear Protection, Hearing Protection, Impact Protection, Sound Attenuation, Real-Ear Attenuation, SPH-4 Helmet, Crushable Earcup, Noise Attenuation.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) See reverse.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

ABSTRACT:


The use of the SPH-4 aviator's helmet in the Army is to provide hearing protection, voice communications, and head protection against impact. Efforts have been made recently to improve impact protection in the region of the earcup. In 1977, USAARL contracted with Simula Incorporated to develop an earcup which would provide greater energy absorption on impact and still provide sound attenuation equivalent to the current standard earcup. A prototype has been submitted for evaluation of noise attenuation and comparison to the current standard earcup. The crushable earcup was found to provide greater hearing protection at most test frequencies.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	PAGE NO.
List of Tables	2
List of Illustrations.	2
Introduction	3
Methods and Instrumentation.	3
Results and Discussion	11
Conclusions and Recommendations.	11
References	13

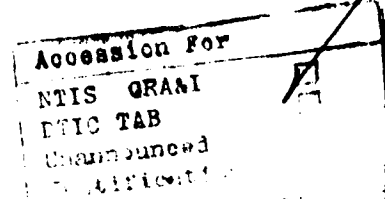

A-1

LIST OF TABLES

TABLE NO.		PAGE NO.
1	Ambient Sound Pressure Levels	5
2	Sound Pressure Levels Measured at Positions in Front of and Behind Normal Head Position at the Frequencies Indicated.	6
3	Sound Pressure Levels Measured at Positions Below and Above Normal Head Position at the Frequencies Indicated	7
4	Sound Pressure Levels Measured at Positions to the Left and Right of Normal Head Position at the Frequencies Indicated.	8
5	Mean and Standard Deviation Values of Sound Attenuation of the Earcups and the Results of the Analysis using Tukey's Honestly Significant Difference Procedure.	12

LIST OF ILLUSTRATIONS

FIGURE NO.		PAGE NO.
1	Views of Standard SPH-4 and Prototype Crushable Earcups	4
2	Real Ear Attenuation Test System.	9

INTRODUCTION

The SPH-4 aviator's helmet (MIL H-43925) currently in use in the Army provides hearing protection, voice communications, and head protection against impact. However, it has been recognized that impact protection is significantly compromised in the region of the earcup (Haley, et al., 1983). In 1977, the United States Army Aeromedical Research Laboratory (USAARL) contracted with Simula Incorporated to develop an earcup which would provide greater energy absorption for impact while providing sound attenuation equivalent to the earcups in the current SPH-4 helmet. Proposed production samples (Simula Assembly Number 100756-3) resulting from that contract were submitted for testing. This report will discuss the results of sound attenuation testing conducted at USAARL in accordance with the current ANSI standard to compare the prototype earcup with the current standard earcup.

METHODS AND INSTRUMENTATION

The method for determining the sound attenuation characteristics of the standard and crushable earcups was the ANSI Standard Z24.22(1957), "USA Method for the Measurement of the Real-Ear Attenuation of Ear Protectors at Threshold" (Revised 1971). Ten listeners were selected from a pool of paid volunteers. The subject population was made up of normal hearing junior college students. A pair of each earcup type (see Figure 1, page 4) was installed in the same regular size SPH-4 helmet. The same listeners were used to evaluate the real-ear attenuation characteristics of each earcup type on different occasions.

The real-ear attenuation measurement was conducted in a custom-built Tracoustics Corporation Audiometric Examination Room measuring 10'X9'4"X6'6" (LXWXH) located at the Acoustical Sciences Research Group Laboratory, Sensory Research Division, United States Aeromedical Research Laboratory, Fort Rucker, Alabama. There was no audible ambient noise in the test room during the test period. Mean sound pressure levels in decibels (re 20 μ Pa) of ambient noise per 1/3 octave band are listed in Table 1. The sound pressure level gradient characteristics of the test room are contained in Tables 2 through 4.

The test equipment and instrumentation are shown schematically in Figure 1. The tones were generated by a Fluke Model 1060A Synthesized Signal Generator. The output of this synthesizer was connected to the input of a Grason-Stadler 1278B electronic switch. The test tone was interrupted with a 50 percent duty cycle. The on duration and off duration were 370 milliseconds each. The rise and decay times of the signal were 40 milliseconds each. The output of the electronic switch was connected to the input of a Grason-Stadler model 1288 power amplifier. The amplifier output was connected

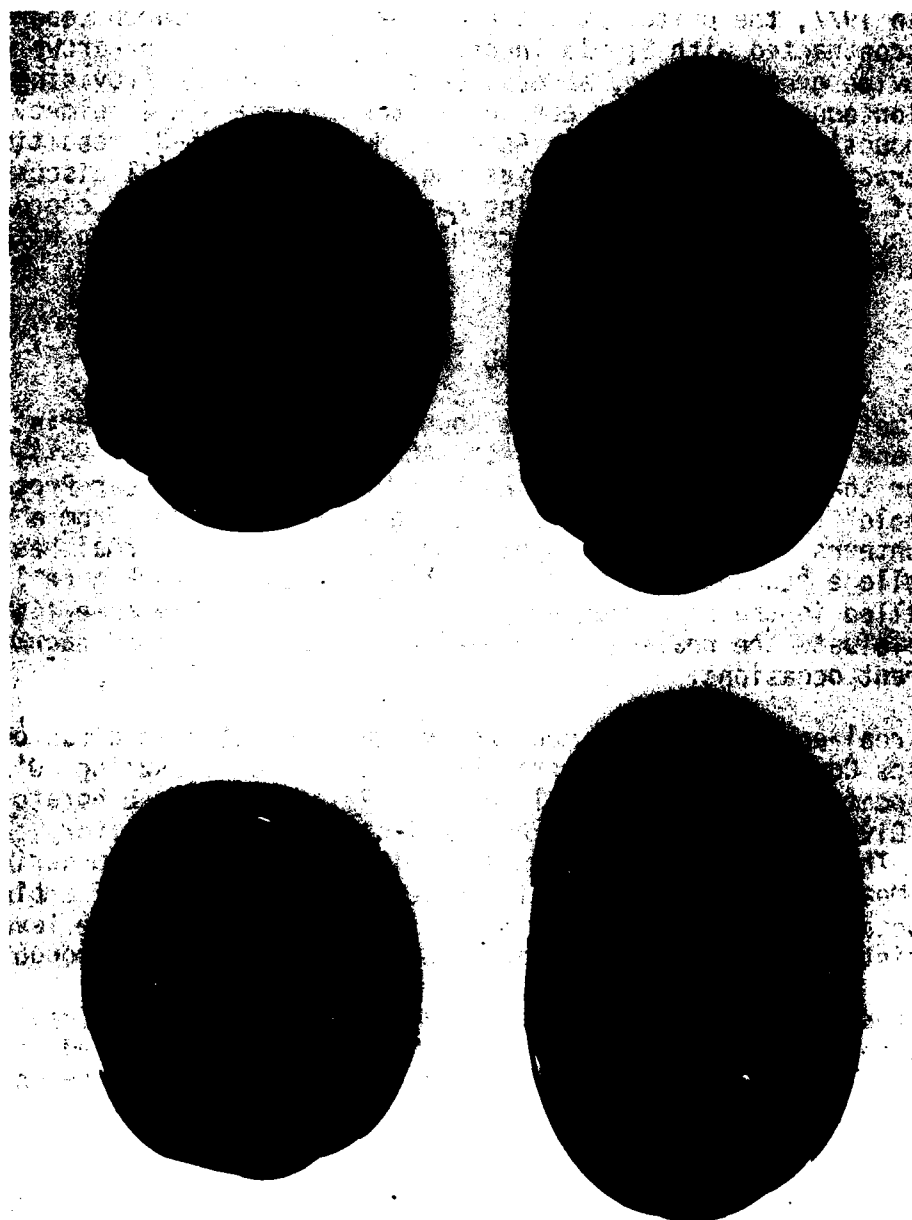


FIGURE 1. Left: End and side view of Standard SPH-4 Earcup.
Right: End and side view of Prototype Crushable Earcup.

TABLE 1

AMBIENT SOUND PRESSURE LEVELS

Mean sound pressure level values in decibels (re 20 μ Pa) for the USAARL Tracoustics Audiometric Room. Also shown are system noise data for the instrumentation used in measuring the acoustic noise

1/3rd Octave Band Center Frequencies in Hertz	System Noise	Ambient Noise
25.0	10.00	26.00
31.5	12.00	21.80
40.0	14.00	20.20
50.0	20.60	19.84
63.0	7.84	14.81
80.0	4.77	15.29
100.0	4.29	16.38
125.0	5.43	15.02
160.0	3.07	11.86
200.0	1.27	9.86
250.0	2.50	7.54
315.0	- 0.27	3.00
400.0	- 1.07	2.23
500.0	- 1.84	0.63
630.0	- 2.12	0.73
800.0	- 3.07	- 0.66
1000.0	- 1.57	0.02
1250.0	- 2.93	- 1.21
1600.0	- 2.75	- 1.23
2000.0	- 2.05	- 0.71
2500.0	- 1.32	- 0.16
3150.0	- 0.64	0.27
4000.0	0.50	1.5
5000.0	1.57	2.07
6300.0	2.43	3.11
8000.0	1.84	2.27
10000.0	0.07	1.09
12500.0	- 0.96	0.18
16000.0	- 1.77	- 0.71
20000.0	- 3.34	- 1.62
A	11.90	13.27
B	14.80	20.00
C	22.40	31.50
LIN	25.30	40.60

TABLE 2

SOUND PRESSURE LEVELS MEASURED AT POSITIONS IN
FRONT OF AND BEHIND NORMAL HEAD POSITION AT THE FREQUENCIES INDICATED

Test Freq in Hz	Distance in Inches in Front of the Normal Head Position			Normal Head Position	Distance in Inches Behind the Normal Head Position		
	3"	2"	1"		1"	2"	3"
125	75.2	75.0	74.8	74.6	74.4	74.3	74.1
250	78.8	78.6	78.6	78.6	78.6	78.5	78.5
500	83.4	83.2	83.0	83.2	83.4	83.6	84.0
1000	85.0	85.2	85.0	84.1	82.6	81.7	81.8
2000	85.7	86.6	86.0	84.2	85.5	87.0	86.1
3000	87.2	87.7	87.0	87.1	87.1	85.2	85.8
4000	81.0	82.0	80.8	81.0	79.4	78.0	77.2

TABLE 3
SOUND PRESSURE LEVELS MEASURED AT POSITIONS
BELOW AND ABOVE NORMAL HEAD POSITION AT THE FREQUENCIES INDICATED

Test Freq in Hz	Distance in Inches Above the Normal Head Position						Normal Head Position	Distance in Inches Below the Normal Head Position					
	6"	5"	4"	3"	2"	1"		1"	2"	3"	4"	5"	6"
125	75.6	75.5	75.4	75.2	75.2	75.0	74.8	74.8	74.7	74.6	74.3	74.2	74.0
250	77.9	78.1	78.2	78.3	78.4	78.6	78.7	78.7	79.1	79.3	79.4	79.5	79.7
500	83.2	83.4	83.4	83.3	83.2	83.2	83.2	83.2	83.1	83.2	83.4	83.6	83.5
1000	80.6	81.7	82.4	83.0	83.5	84.0	84.4	84.4	84.9	84.8	83.6	83.2	83.0
2000	83.3	83.6	83.6	83.1	83.2	83.6	84.6	85.5	86.0	85.1	83.4	83.2	83.0
3000	86.0	86.4	86.4	85.7	84.7	85.7	86.8	87.4	87.8	85.3	86.0	86.4	86.7
4000	80.6	76.0	80.5	81.6	80.0	79.4	81.7	81.6	79.8	77.6	79.7	79.2	80.5

TABLE 4
SOUND PRESSURE LEVELS MEASURED AT POSITIONS TO THE
LEFT AND RIGHT OF NORMAL HEAD POSITION AT THE FREQUENCIES INDICATED

Test Freq in Hz	Distance in Inches Left of the Normal Head Position					Normal Head Position	Distance in Inches Right of the Normal Head Position						
	6"	5"	4"	3"	2"		1"	0	1"	2"	3"	4"	5"
125	74.9	75.0	75.0	74.8	74.8	74.8	74.8	74.7	74.7	74.6	74.6	74.4	74.2
250	79.1	79.0	79.0	78.8	78.8	78.7	78.6	78.5	78.4	78.3	78.2	78.0	77.9
500	83.6	83.6	83.5	83.4	83.2	83.2	83.1	83.0	83.0	83.0	83.0	83.0	83.0
1000	84.4	84.4	84.4	84.2	84.2	84.1	84.1	84.0	84.0	84.0	83.9	83.8	83.8
2000	86.1	85.8	85.8	85.4	85.2	84.4	84.2	84.5	85.3	36.2	86.7	87.0	86.6
3000	86.6	87.7	87.6	84.8	84.6	85.4	87.6	88.4	88.5	88.2	87.2	85.4	84.4
4000	81.2	80.9	79.1	79.5	80.4	81.0	81.2	81.0	80.3	79.4	79.9	80.0	78.0

REAL EAR ATTENUATION TEST SYSTEM

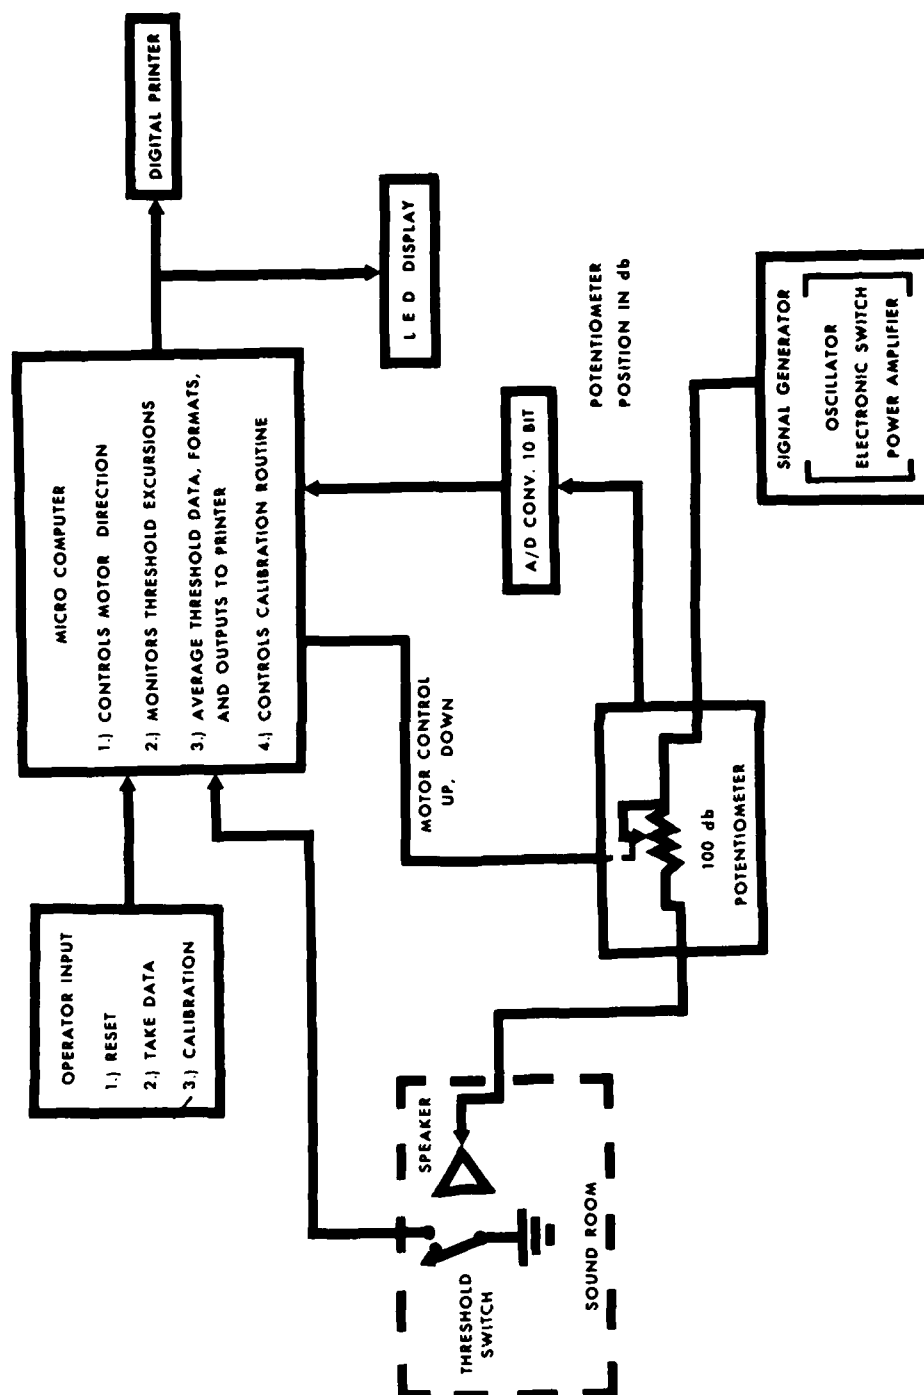


FIGURE 1. Arrangement of equipment and instrumentation used for real-ear sound attenuation testing performed at USAARL.

to a Grason-Stadler 1293 (10 ohm) step attenuator which provided the operator with a calibrated control of the test tone intensity. This allowed the operator to check listener reliability or provide additional sound intensity when testing very efficient hearing protective devices.

The step attenuator output was input to a Grason-Stadler E-3262A recording attenuator. The direction of the attenuator was controlled by the listener with a noiseless photo-electric switch. For each test sound, the listener controlled the signal level in the manner described by Von Békésy (1947). The signal was presented via an Altec 605B 15-inch loudspeaker. The Altec speaker could produce a sound field at the listener's position which could vary from a minimum of 10 dB below the listener's unoccluded threshold to a maximum intensity of at least 10 dB above the listener's occluded threshold at all test frequencies. The voltage input to the speaker was calibrated at the beginning of each test with a Hewlett-Packard 3400A RMS Voltmeter.

The experimenter was provided with an override control of the system which allowed him to place and hold the recording attenuator at any value for purpose of training and verifying listener's reliability.

The test stimuli used were pure tones of the following frequencies: 75, 125, 250, 500, 1000, 2000, 3000, 4000, 6000, and 8000 Hertz.

The test listeners were required to have hearing thresholds for both ears at all test frequencies not greater than 10 dB American Standards Association (ASA 1951) as measured by a standard diagnostic audiometer. The real-ear attenuation for each type earcup was determined by taking the differences between hearing threshold values measured under two conditions. A free-field reference threshold was obtained for all frequencies with the listener facing the loudspeaker and with his head position fixed by the use of a chin rest. An attenuated threshold measurement then was made under identical conditions except that the listener wore an SPH-4 helmet which was fitted with either the standard or crushable earcup. A full standard real-ear attenuation test (three attenuation values for each test frequency for each of the 10 listeners) was run for both earcups.

A microcomputer was used to monitor the listener's responses and to average the threshold data by frequency. The computer also was used to format and output a digital printer with threshold data and to control the calibration routine.

The resulting output from the digital printer became the raw data for the experiment. These data were reduced to attenuation values by calculating the difference between the free-field thresholds and attenuated thresholds by frequency. The attenuation data then were subjected to statistical analysis.

RESULTS AND DISCUSSION

The thrust of this study was a comparison of the two earcups by frequency. Mean sound attenuation data for each cup by frequency are presented in Table 5. To determine the significance of differences between these earcups, the data were analyzed under a $10 \times 2 \times 10$ factorial analysis of variance (ANOVA) model with a priori error rate (α) of .05. The results indicated that all main effects were significant as were all interactions. A significant main effect for frequency was expected since nearly all sound attenuating devices are more efficient at some frequencies. Similarly, the main effect for subjects was expected since hearing threshold patterns are known to vary from subject to subject. The main effect for cups suggests that the crushable earcup attenuates sound significantly better at most frequencies than the standard cup; ($F(1,400) = 30.13, p < .001$). The two-way interaction of cups with frequency was significant ($F(9,400) = 12.87, p < .001$) indicating a nonconstant difference in mean sound attenuation across frequency for the two cups.

The results of the ANOVA suggested the need for a multiple comparison. Tukey's Honestly Significant Difference (HSD) procedure was used for this purpose (Tukey, 1949). As shown in Table 5, the average attenuation is greater for the crushable earcup than the standard at all frequencies except 2000, 4000, and 6000 Hz. The results of the HSD analysis indicate that the crushable cup is as good as or significantly better than the standard SPH-4 earcup at all frequencies except 4000 and 6000 Hz, where results from the standard cup are better.

The results of this study are most important when considering the fact that obtaining adequate noise attenuation in the lower frequencies, 1000 Hz and below, is a perennial problem for two reasons: (1) attenuation is physically difficult to obtain, and (2) aircraft noise is predominantly in this range. The development of an earcup that significantly increases sound attenuation at all lower frequencies and affords greater safety from impact injury is an important achievement. It offers significant potential for reducing the incidence of job-related hearing loss among Army aviators.

CONCLUSIONS AND RECOMMENDATIONS

The crushable earcup was found to provide significantly greater real-ear attenuation at most frequencies than the standard SPH-4 earcup. For only two test frequencies--4000 and 6000 Hz-- did the crushable earcup provide significantly less attenuation than the standard earcup. Of particular importance is the increased hearing protection provided by the crushable earcup for sounds at 1000 Hz and below.

It is recommended that the new earcup be considered as a replacement for the current earcup used in the SPH-4 helmet.

TABLE 5
MEAN AND STANDARD DEVIATION VALUES OF SOUND ATTENUATION OF THE EARCUPS AND THE RESULTS
OF THE ANALYSIS USING TUKEY'S HONESTLY SIGNIFICANT DIFFERENCE PROCEDURE

Test Frequencies in Hertz											
		75	125	250	500	1K	2K	3K	4K	6K	8K
Crushable Earcup	Mean	19.5	16.6	16.5	35.0	29.9	33.1	46.2	42.9	37.6	33.0
	S.D.	5.7	5.3	3.3	3.8	5.6	6.1	5.6	8.1	8.0	9.6
Standard SPH-4 Earcup	Mean	15.0	13.1	13.6	28.7	25.5	34.0	43.3	46.4	42.0	31.4
	S.D.	6.9	5.8	3.7	4.2	4.6	4.4	4.1	5.1	6.7	8.1
Statistically Significant at .05		Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	No

REFERENCES

- American National Standards Institute. 1957. *USA Standard Method for the Measurement of the Real-Ear Attenuation of Ear Protectors at Threshold*. Z24.22-1957 (R1971).
- American Standards Association Bulletin. 1951. *Audiometers for General Diagnostic Purposes*. Z24.5-1951.
- Department of Defense. 1980. *Helmet, Flyer's, Protective, SPH-4*. Washington, DC: Dept. of Defense. MIL-H-43925.
- Haley, Joseph L., Jr., Shanahan, Dennis F., Reading, Thomas E., and Knapp, Stanley C. 1983. Head impact hazards in helicopter operations and their mitigation through improved helmet design. In: Channing, et. al., ed. *Impact injury of the head and spine*. Springfield, IL: Charles C. Thomas. 18:549-577.
- Tukey, J. W. 1949. Comparing individual means in the analysis of variance. *Biometrics*, 5:99-114.
- Von Békésy, Georg. 1947. A new Audiometer. *Acta Otolaryngologica*, 35:411-422.

LIST OF MANUFACTURERS

Altec Lansing Corporation
1515 S. Manchester Avenue
Anaheim, California 92803

Grason-Stadler
56 Winthrop Street
Concord, Massachusetts 01742

Hewlett-Packard
P.O. Box 28234
450 Interstate North
Atlanta, Georgia 30328

John Fluke Manufacturing Company, Inc.
P.O. Box 43210
Mountlake Terrace, Washington 98043

Simula Incorporated
2211 South 48th Street, Suite C
Tempe, Arizona 85282

Tracoustics Incorporated
P.O. Box 3610
Austin, Texas 78764

INITIAL DISTRIBUTION

Commander
US Army Natick R & D Command
ATTN: Tech Librarian
Natick, MA 01760

Commander
US Army Research Institute of
Environmental Medicine
Natick, MA 01760

US Navy
Naval Sub Med Rsch Lab
Med Library, Naval Submarine Base
Box 900
Groton, CT 06340

US Army Avionics R & D Activity
ATTN: DAVAA-O
Fort Monmouth, NJ 07703

Cdr/Dir
US Army Combat Surveillance &
Target Acquisition Lab
ATTN: DELCS-D
Fort Monmouth, NJ 07703

US Army R & D Technical
Support Activity
Fort Monmouth, NJ 07703

Commander
10th Medical Laboratory
ATTN: DEHE (Audiologist)
APO New York 09180

Chief
Benet Weapons Laboratory
LCWSL, USA ARRADCOM
ATTN: DRDAR-LCB-TL
Watervliet Arsenal
Watervliet, NY 12189

Commander
Naval Air Development Center
Biophysics Lab (ATTN: George Kydd)
Code 60B1
Warminster, PA 18974

Human Factors Engr Div
Acft & Crew Systems Tech Dir
Naval Air Development Center
Warminster, PA 18974

Naval Air Development Center
Tech Info Div
Technical Support Department
Warminster, PA 18974

Commander
Naval Air Development Center
ATTN: Code 6022 (Mr. Brindle)
Warminster, PA 18974

Dr. E. Hendler
Code 6003
Naval Air Development Center
Warminster, PA 18974

Director
Army Audiology & Speech Center
Walter Reed Army Medical Center
Forest Glen Section, Bldg 156
Washington, DC 20012

Director
Walter Reed Army Institute
of Research
Washington, DC 20012

Commander
US Army Institute of
Dental Research
Walter Reed Army Medical Center
Washington, DA 20012

Uniformed Services University
of the Health Sciences
4301 Jones Bridge Road
Bethesda, MD 20014

Commanding Officer
Naval Medical R & D Command
National Naval Medical Center
Bethesda, MD 20014

Under Secretary of Defense for
Research and Engineering
ATTN: Mil Asst for Medical
and Life Sciences
Washington, DC 20301

Director of Professional Services
Office of The Surgeon General
Department of the Air Force
Washington, DC 20314

Naval Air Systems Command
Tech Library Air 950D
Rm 278, Jefferson Plaza II
Department of the Navy
Washington, DC 20361

US Navy
Naval Research Lab Library
Code 1433
Washington, DC 20375

US Navy
Naval Research Lab Library
Shock & Vibration Info Ctr
Code 8404
Washington, DC 20375

Harry Diamond Laboratories
Scientific & Technical
Information Offices
2800 Powder Mill Road
Adelphi, MD 20783

Director
US Army Human Engineering
Laboratory
ATTN: Tech Library
Aberdeen Proving Ground, MD
21005

US Army Material Systems
Analysis Agency
ATTN: Reports Dist
Aberdeen Proving Ground, MD
21005

US Army Ordnance Center
and School
Library, Bldg 3071
ATTN: ATSL-DOSL
Aberdeen Proving Ground, MD
21005

Director
Ballistics Research Lab
ATTN: DRDAR-TSB-C (STINFO)
Aberdeen Proving Ground, MD
21005

US Army Environmental Hygiene
Agency Library, Bldg E2100
Aberdeen Proving Ground, MD
21010

Commander
US Army Med Rsch Institute
of Chemical Defense
Aberdeen Proving Ground, MD
21010

Technical Library
Chemical Systems Laboratory
Aberdeen Proving Ground, MD 21010

Commander
US Army Medical R & D Command
ATTN: SGRD-SI (Mrs. Madigan)
Fort Detrick
Frederick, MD 21701

Commander
US Army Med Rsch Institute
of Infectious Diseases
Fort Detrick
Frederick, MD 21701

Commander
US Army Med Bioengineering
R & D Laboratory
Fort Detrick
Frederick, MD 21701

Dir of Biol & Med Sciences Div
Office of Naval Research
800 N. Quincy Street
Arlington, VA 22217

Defense Technical
Information Center
Cameron Station, VA 22314

US Army Material Development &
Readiness Command
ATTN: DRCSCG
5001 Eisenhower Avenue
Alexandria, VA 22333

US Army Foreign Science &
Technology Center
ATTN: DRXST-IS1
220 7th Street, NE
Charlottesville, VA 22901

Commander
US Army Transportation School
ATTN: ATSP-TD-ST
Fort Eustis, VA 23604

Commander
US Army Air:mobility Laboratory
ATTN: Library
Fort Eustis, VA 23604

US Army Training and
Doctrine Command
ATTN: ATCD
Fort Monroe, VA 23651

Commander
US Army Training and
Doctrine Command
ATTN: Surgeon
Fort Monroe, VA 23651

US Army Research and
Technology Laboratory
Structures Laboratory Library
NASA Langley Research Center
Mail Stop 266
Hampton, VA 23665

US Navy
Naval Aerospace Medical
Institute Library
Bldg 1953, Code 102
Pensacola, FL 32508

US Air Force
Armament Development and
Test Center
Eglin Air Force Base, FL 32542

Colonel Stanley C. Knapp
US Central Command
CCSG MacDill AFB, FL 33608

Redstone Scientific Information
Center
DRDMI-TBD
US Army Missile R & D Command
Redstone Arsenal, AL 35809

Air University Library
(AUL/LSE)
Maxwell AFB, AL 36112

Commander
US Army Aeromedical Center
Ft Rucker, AL 36362

Commander
US Army Avn Center &
Fort Rucker
ATTN: ATZQ-CDR
Ft Rucker, AL 36362

Director
Directorate of Combat
Developments
Bldg 507
Ft Rucker, AL 36362

Director
Directorate of Training
Development
Bldg 502
Ft Rucker, AL 36362

Chief
Army Research Institute
Field Unit
Ft Rucker, AL 36362

Commander
US Army Safety Center
Ft Rucker, AL 36362

Commander
US Army Aviation Center
& Fort Rucker
ATTN: ATZQ-T-ATL
Ft Rucker, AL 36362

Commander
US Army Aircraft
Development Test Activity
ATTN: STEBG-MP-QA
Cairns AAF
Ft Rucker, AL 36362

President
US Army Aviation Board
Cairns AAF
Ft Rucker, AL 36362

Canadian Army Liaison Officer
Bldg 602
Ft Rucker, AL 36362

Netherlands Army Liaison Office
Bldg 602
Ft Rucker, AL 36362

German Army Liaison Office
Bldg 602
Ft Rucker, AL 36362

British Army Liaison Office
Bldg 602
Ft Rucker, AL 36362

French Army Liaison Office
Bldg 602
Ft Rucker, AL 36362

US Army Research and
Technology Labs
Propulsion Laboratory MS 77-5
NASA Lewis Research Center
Cleveland, OH 44135

Human Engineering Division
Air Force Aerospace Medical
Research Laboratory
ATTN: Technical Librarian
Wright Patterson AFB, OH
45433

US Air Force Institute of
Technology (AFIT/LDE)
Bldg 640, Area B
Wright-Patterson AFB, OH 45433

John A. Dellinger, MS, ATP
Univ of Ill - Willard Airport
Savoy, IL 61874

Henry L. Taylor
Director
Institute of Aviation
Univ of Ill - Willard Airport
Savoy, IL 61874

Commander
US Army Troop Support and
Aviation Material Readiness Cmd
ATTN: DRSTS-W
St Louis, MO 63102

Commander
AVRADCOM
ATTN: SGRD-UAX-AL (Maj Lacy)
Bldg 105
4300 Goodfellow Boulevard
St Louis, MO 63166

Commander
US Army Aviation R & D Command
ATTN: DRDAV-E
4300 Goodfellow Blvd
St Louis, MO 63166

Commander
US Army Aviation R & D Command
ATTN: Library
4300 Goodfellow Blvd
St Louis, MO 63166

Commanding Officer
Naval Biodynamics Laboratory
PO Box 24907
Michoud Station
New Orleans, LA 70129

Federal Aviation Administration
Civil Aeromedical Institute
ATTN: Library
Box 25082
Oklahoma City, OK 73125

US Army Field Artillery School
ATTN: Library
Snow Hall, Room 14
Fort Sill, OK 73503

Commander
US Army Academy of Health Sciences
ATTN: Library
Ft Sam Houston, TX 78234

Commander
US Army Health Services Command
ATTN: Library
Ft Sam Houston, TX 78234

Commander
US Army Institute of
Surgical Research
Ft Sam Houston, TX 78234

US Air Force
Aerospace Medical Division
School of Aerospace Medicine
Aeromedical Library/TSK-4
Brooks AFB, TX 78235

US Army
Dugway Proving Ground
Technical Library
Bldg 5330
Dugway, UT 84022

Dr. Diane Damos
Psychology Department
Arizona State University
Tempe, AZ 85287

US Army Yuma Proving Ground
Technical Library
Yuma, AZ 85364

US Army White Sands Missile Range
Technical Library Division
White Sands Missile Range
New Mexico, 88002

US Air Force
Flight Test Center
Technical Library, Stop 238
Edwards AFB, CA 93523

US Army Aviation Engineering
Flight Activity
ATTN: DAVTE-M (Tech Lib)
Edwards AFB, CA 93523

US Navy
Naval Weapons Center
Tech Library Division
Code 2333
China Lake, CA 93555

US Army Combat Developments
Experimental Command
Technical Library
Hq, USACDEC
Box 22
Ft Ord, CA 93941

Aeromechanics Laboratory
US Army Rsch & Tech Labs
Ames Research Center, M/S 215-1
Moffett Field, CA 94035

Commander
Letterman Army Institute of Rsch
ATTN: Med Rsch Library
Presidio of San Francisco
CA 94129

Sixth US Army
ATTN: SMA
Presidio of San Francisco
CA 94129

Director
Naval Biosciences Laboratory
Naval Supply Center, Bldg 844
Oakland, CA 94625

Col F. Cadigan
DAO-AMLOUS B
Box 36, US Embassy
FPO New York 09510

National Defence Headquarters
101 Colonel By Drive
Ottawa, Ontario, Canada
K1A 0K2
ATTN: DPM

Staff Officer, Aerospace Medicine
RAF Staff
British Embassy
3100 Massachusetts Ave, NW
Washington, DA 20008

Department of Defence
R.A.N. Rsch Laboratory
P.O. Box 706
Darlinghurst, N.S.W. 2010
Australia

Canadian Society of Avn Med
c/o Acad of Med, Toronto
ATTN: Ms Carmen King
288 Bloor Street West
Toronto, Ontario
M5S 1V8

Canadian Air Line Pilot's Assn
MAJ J. Soutendam (Ret)
1300 Steeles Ave East
Brampton, Ontario, Canada
L6T 1A2

Canadian Forces Med Ln Off
Canadian Defence Ln Staff
2450 Massachusetts Ave, NW
Washington, DC 20008

Commanding Officer
404 Maritime Training Squadron
Canadian Forces Base Greenwood
Greenwood, N.S. BOP 1N0 Canada
ATTN: Aeromed Tng Unit

Officer Commanding
School of Operational and
Aerospace Medicine
DCIEM
PO Box 2000
1133 Sheppard Avenue West
Downsview, Ontario, Canada
M3M 3B9

END

FILMED

384

DTIC