

(12)

guide to technical documents

volume II

january 1983 through
december 1983

naval civil engineering laboratory
port hueneme, california

DTIC
ELECTE
JUL 30 1984
S B

Please disassemble this document and remove old pages and insert
the new material supplied in NCEL's Guide to Technical Documents,
Vol II, dated Jan 1973 through Dec 1981.

Approved for public release; distribution unlimited.

84 07 23 009

REPRODUCED AT GOVERNMENT EXPENSE


guide to technical documents

volume II


january 1972 through
december 1983

naval civil engineering laboratory
port hueneme, california

Approved for public release; distribution unlimited.

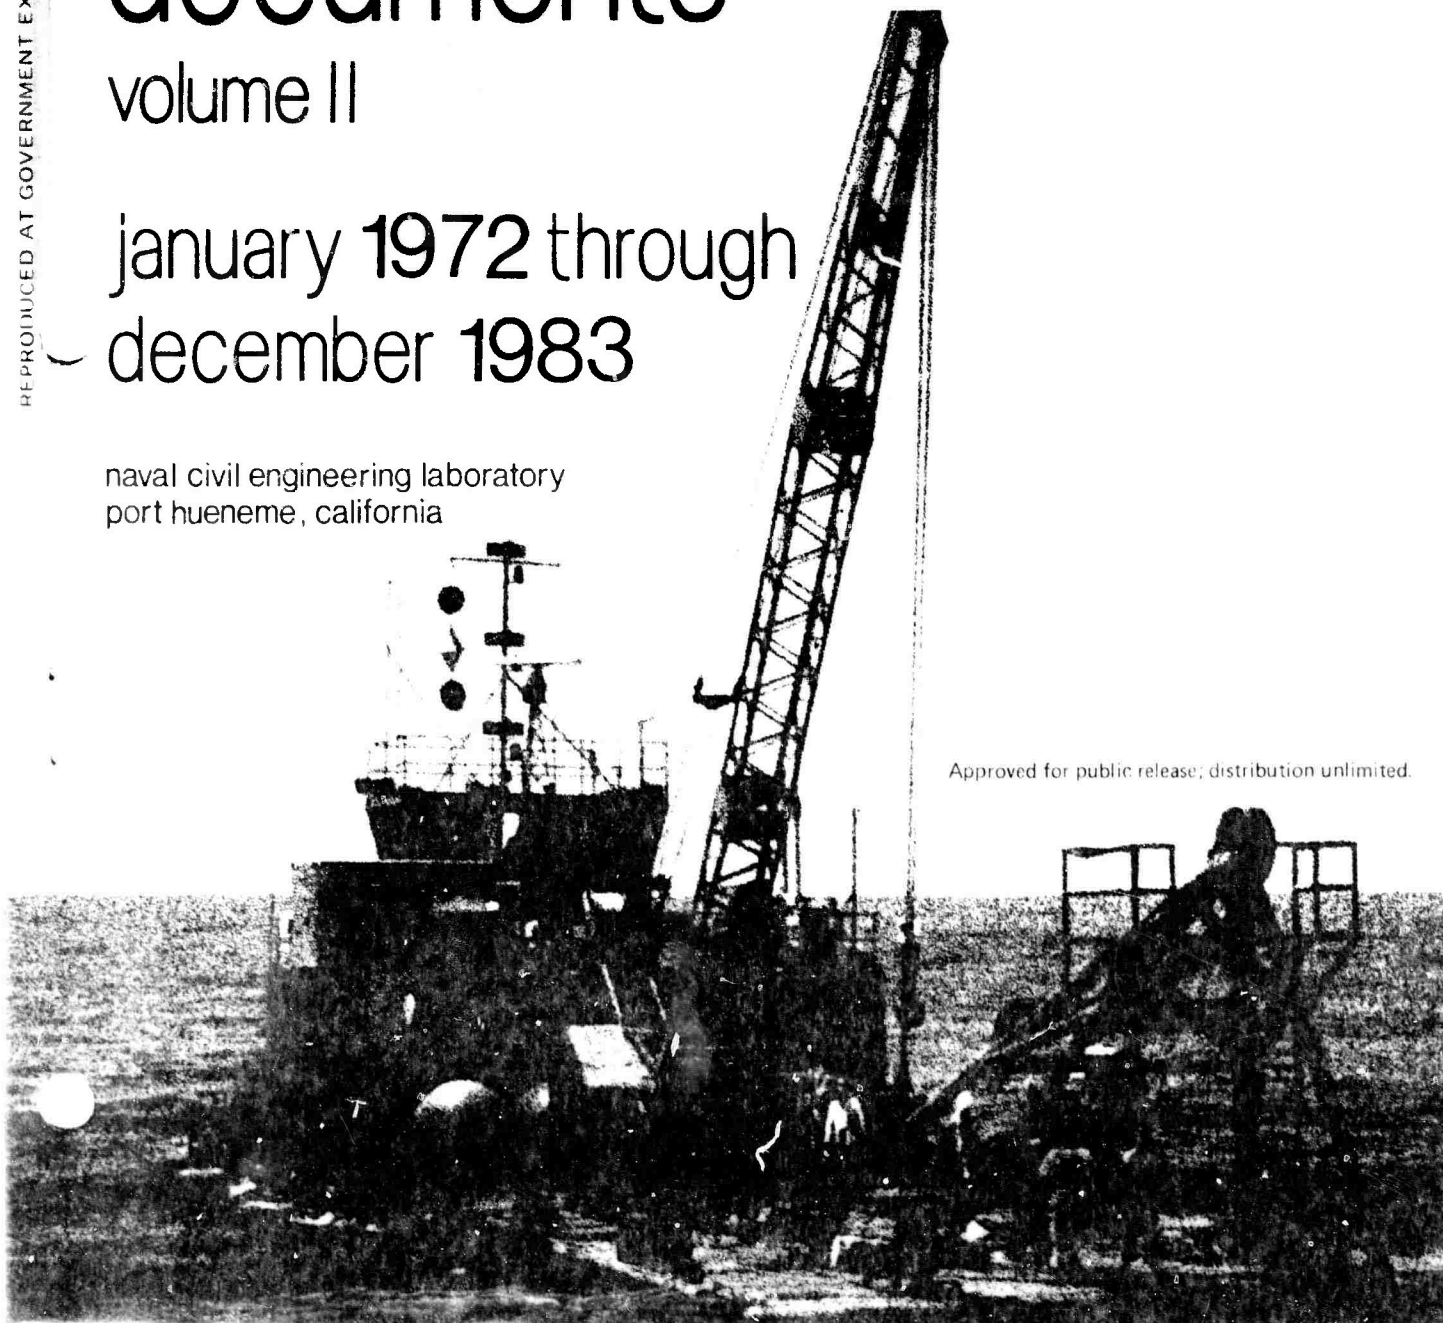

DISCLAIMER NOTICE

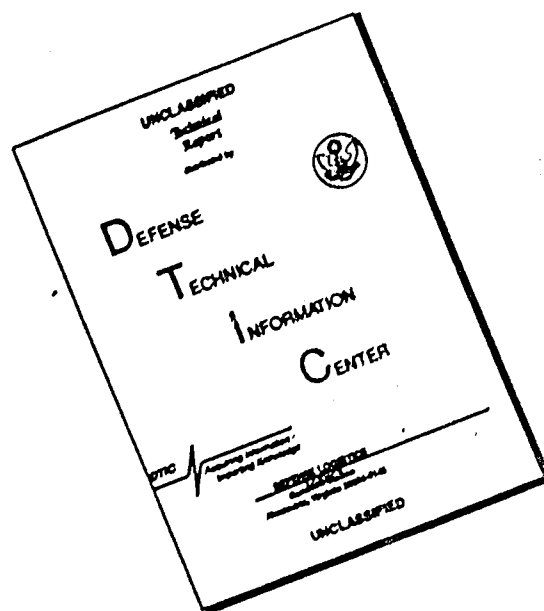

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

This "Guide to Technical Documents" lists all the formal reports that have been published by NCEL on research, test, and evaluation. These reports are available to addressees from the following sources:

Unclassified, unlimited documents — available to general public

National Technical Information Service (NTIS)
Operations Division
5285 Port Royal Road
Springfield, VA 22161 (703) 557-4650

Classified and limited distribution documents — available to Department of Defense agencies and their contractors only

Defense Technical Information Center (DTIC)
Cameron Station
Alexandria, VA 22314

When ordering documents from either NTIS or DTIC, order by AD, ATI, or PB number, if known. Otherwise, order by NCEL document number, title, author, and date. In order to obtain NCEL documents quickly, it is recommended that each Engineering Field Division and Public Works Office register with DTIC in advance. Request a DTIC Form 1540, Registration for Scientific and Technical Information Services, from DTIC, Attn: DTIC-TSR-1. Be very careful in circling the fields of interest identified on the back of the form because you can order later only those fields of interest that you have had certified and registered now. The form will be returned to you with a user code assigned.

It is also recommended that you set up an account with NTIS for billing purposes by forwarding a deposit of about \$50.00, the amount depending upon anticipated use of the service.

If documents are needed urgently, DTIC maintains a 24-hour answering service for your convenience. Call —

(202) 274-6811 or autovon 284-6811

and follow the instructions of the recorded voice. You should be aware that an 8-second pause in your conversation will automatically disconnect you.

If you have queries concerning NCEL documents, please contact NCEL:

Mr. Ivan Wanless
Presentations and Graphics Center, Code L07
Naval Civil Engineering Laboratory
Port Hueneme, California 93043

R-886

Cable Burial in the Deep Ocean Floor, Apr 1981, P. K. Rockwell, J. H. Engel, W. B. Piercy, ADB058924L

Bottom-fishing equipment frequently damages or breaks Navy bottom-laid telecommunication cables, causing substantial repair costs and interruption of critical communication systems. The Naval Civil Engineering Laboratory (NCEL) has developed and validated an engineering concept for a Deep Ocean Cable Burial (DOCB) system to provide the Navy with a means of burying cables 3 feet deep in ocean sediments, at speeds not less than 1 knot in water depths to 6,000 feet. The DOCB system concept includes a remotely controlled machine which buries previously laid cables; it is powered and controlled from a surface ship via an electromechanical umbilical cable. The machine is self-propelled by ducted thrusters and supported on water-lubricated skids. The excavation system comprises an orbital vibrating plowshare and a vertical water jet. Full-scale field testing at NCEL focused on: (a) quantifying orbital vibratory plow drawbar forces; (b) evaluating a vertically impinging water jet trenching subsystem; and (c) demonstrating the effect of water lubrication on the soil drag of a flat-bottomed skid. Field tests showed that drawbar force was reduced 70% by applying elliptical orbital vibration to a plow. The water jet tests demonstrated that a 2-1/2-inch nozzle can cut 36 inches deep in 1- to 2-psi clay at a nozzle pressure of 75 psi and flow rate of 1,200 gpm. The water-lubricated skid tests showed that forcing a layer of water between the skid and soil reduced the skid/soil drag by 50%. Finally, a full-scale experimental cable burial vehicle was tested in shallow water. This 360-hp vehicle buried cables in excess of 42 inches deep at 1.2 knots.

R-887

Laser-Based Noncontacting Displacement Measurement, May 1981, G. Warren, ADB058925L

A laser-based noncontact method of directly measuring time-displacement has been developed as an alternative to electrical transducers and hard-wire cables. A biaxial device employing a He-Ne laser and position sensor has been built to monitor structural motion at distances up to 350 meters with displacement accuracies better than 2 mm. The method proved valuable in measuring dynamic displacement of large structures where accessibility was limited or where fixed points of reference were nonexistent. Also, a means of measuring triaxial displacement has been outlined.

R-888

Design Procedures for Embedment Anchors Subjected to Dynamic Loading Conditions, Nov 1981, H. G. Herrmann, ADA110325

This report provides procedures for determining allowable design loads for embedment anchors under all types of dynamic loads, including impact (as from a ship driving into a mooring), cyclic (as from a buoy or ship riding in a mooring system during a storm), and earthquake loading. The design procedures are simplified in the form of guidelines applicable to most site conditions and are complete to the point of including the following: (1) site survey requirements; (2) detailed static design procedures; (3) description and definition of dynamic loads; (4) design procedures for impact, cyclic, and earthquake loading; (5) selection and use of appropriate factors of safety; and (6) description of available existing NCEL embedment anchor hardware. While the procedures are designed specifically for the NCEL-developed family of propellant (often termed explosive) embedded anchors, they are applicable to other types of embedment anchors and screw anchors. For hardware configurations or site conditions beyond the range of the guidelines presented here, references to appropriate other documents are provided.

R-889

ESKIMO V1 Results, Nov 1981, P. E. Tafoya, ADB064461L

ESKIMO V1, sixth in the series of Explosive Safety Knowledge Improvement Operation Tests, was conducted to test and evaluate the safety and performance under blast loading of flat-roofed, earth-covered, box-shapes, reinforced concrete (smokeless powder and projectile) storage magazines. The test magazines were located at the minimum intermagazine distances allowed for magazines of the box type. The two magazines tested, the Type IIB (old design) and Type A (new design), were half-scale models characterized by the box shape, similar geometric dimensions, interior three-bay design, and two entrance doors located in the headwall. The donor structure was a mock-up of a Type IIB magazine and simulated the geometry and mass of the roof, earth-cover, and headwall of the prototype. The donor charge consisted of 60 Mark 16 torpedo warheads containing the equivalent to 44,000 pounds of TNT, corresponding to 350,000 pounds of TNT at full scale.

Both structures survived the test with limited damage. The Type IIB doors failed during the blast and were blown into the structure; permanent roof deflections were limited (less than 1 inch); and minor cracking of the concrete roof and headwall was evident. The Type A magazine sustained primarily architectural damage to the roof parapet; roof deflections (less than 0.5 inch) were noted, with minor cracking of the concrete roof. Both magazines, if in the field, could be reusable after minor reworking.

R-890

Design Guidelines for the Development of a Trencher for Cutting Rock, Coral, and Frozen Sand in the Nearshore Environment, Dec 1981, W. R. Tausig, ADB063763L

Cables and pipelines that traverse the nearshore region often fail due to damage from hydronamic forces and dragging anchors unless they are protected. Trenching and burying cables below the seafloor has been shown to be a viable method for protecting cables and pipelines in nearshore and coral areas. This report summarizes nearshore trencher studies at the Naval Civil Engineering Laboratory, and surveys recent advances made in nearshore trenching technology. As a result of these studies, NCEL conducted a development program to demonstrate the feasibility of using cavitating waterjets for trenching in rock and coral. The results of this development program, along with a state-of-the-art review of mechanical trenchers combined with the data resulting from the cavitation waterjet development program, are presented at the conclusion of this report as guidelines for nearshore trencher design.

R-891

Underwater Splicing of Submarine Coaxial Cable, Feb 1982, A. T. Inouye, W. R. Tausig, ADB064462L

The Naval Civil Engineering Laboratory has developed a self-contained unit that can splice submarine coaxial cables in place in the seafloor. The unit restores electrical and mechanical characteristics of the cable by preparing the cable's end and inserting it into the splice. Experimental splice models were attached to cables in seawater at pressures up to 5,000 psig and were subjected to 6,000 VDC. Leakage currents were less than 1 μ A. The splice was also subjected to steady state DC voltages to 35,000 volts and 10-nsec transient at voltages to 70,000 volts peak with no electrical degradation. Attenuation of the splice was measured at 0.01 db/m at 13 MHz. Strength restoration consists of a modified commercial sliding cone device with a holding capacity of about 4,600 pounds on a copper-clad steel cable. The splice is filled with castor oil for pressure compensation and prevention of high-voltage breakdown or corona noise. The development of the splice shows that an underwater splicing technique on the seafloor is feasible.

R-892

Geotechnical Diver Tool Development, May 1982, J. A. Bailard, ADB065655L

Seven geotechnical site survey tools were developed for diver use; these include: an impact sediment corer, a vacuum-assisted sediment corer, a rock corer, a vane shear device, a miniature standard penetration test device, a water-jet probe, and a rock strength device. Laboratory tests and field tests and evaluation of the tools provided adequate geotechnical information to support the design of most nearshore Navy installations.

R-893

Design and Performance of Thermal Sensors for Measuring Ocean Currents, May 1982, A. P. Smith, T. R. Kretschmer, B. C. Streets, ADB065661L

The development of an ocean current sensor based on thermal anemometry principles is described. The sensor accurately measures current speed to $\pm 5\%$ of reading and current direction to ± 8 degrees. Significant problems associated with the use of thermal sensors in water have been solved. For example, a unique antifouling technique, based on electrolytic hypochlorination, was developed that controls biofouling indefinitely on the sensor surface; the overall strength of the sensor was greatly increased by substituting ceramic substrates for quartz substrates; and a waterproof coating, based on Parylene D, increased sensor life expectancy from several days to several weeks. This report describes the design and manufacture of the sensor. An evaluation of the results obtained from laboratory and ocean testing of the sensor is presented along with a description of the antifouling technique. The theoretical background associated with sensor operation is covered briefly.

R-894

Air Infiltration and Stratification Investigation of Air Force and Navy Aircraft Hangars, Jun 1982, J. L. Ashley, ADB066649L

An investigation was conducted to measure the air infiltration and stratification characteristics associated with Air Force and Navy aircraft hangars. Four hangars were evaluated at different locations throughout the United States during the 1980-1981 winter. Air infiltration measurements were accomplished by measuring the decay rates of a tracer gas (sulfur hexafluoride) with hangar doors opened and closed. Floor-to-ceiling temperature gradients were measured and correlated to outside air temperature. Concepts to reduce stratification and air infiltration were evaluated and recommendations made. Lower limits for air infiltration were established, and a method to predict the severity of stratification was developed. (Also published as AFESC/RDVA ESL-TR-81-40)

R-895

Seawater Hydraulics: Development of an Experimental Vane Motor for Powering Diver-Held Tools, Jul 1982, S. A. Black, ADB068205L

The Naval Civil Engineering Laboratory is developing a diver-operated hydraulic tool system that uses seawater as the working fluid. In the fall of 1978, work began on the development of an experimental vane motor capable of powering diver-held tools. Material requirements for the vane motor components were investigated in detail, and an engineering model of the motor was designed and fabricated using the most promising materials. The best results were obtained by using Torlon 4275, a high-strength thermoplastic, for the vanes, side plates, and bearings, and Inconel 625, a high-nickel-based alloy, for the housing and rotor. Based on the results of engineering development, an experimental vane motor was fabricated and tested in the laboratory. The motor, with a volume of about 25 in.³, weighs only 5 pounds, and produces 3.3 hp at 1,600 rpm with 80% overall efficiency when supplied with 7 gpm of seawater at 1,000 psi. More than 60 hours of full-power operation have been achieved. The results to date of the development and testing are presented in this report.

R-896

Safe Underwater Electrical Power Transmission, Aug 1982, L. W. Tucker, ADB067752L

To enable divers to safely use electrical equipment underwater, the power transmission system design must include techniques for protecting the diver from electrical shock hazards. The Naval Civil Engineering Laboratory (NCEL) has developed an improved ground fault protecting system that can protect the diver when used in conjunction with other methods of protection. The NCEL ground fault system will shut down power to the underwater equipment in less than 10 msec if a breakdown in the insulation resistance of the transmission lines allows more than 2.5 mA to flow to ground. This report reviews the methods that can reduce the possibility of electric shock to the diver. The development of the NCEL ground fault detection is also presented along with the results from ocean tests of an electric-powered vehicle equipped with the protection system.

R-897

Improved Split-Pipe Cable Protection Techniques, Dec 1982, R. L. Brackett, W. R. Tausig, ADB073775L

The U.S. Navy currently maintains and operates numerous underwater power and signal cables. Most of these cables utilize split pipe systems to protect the cable from damage in the surfzone and when crossing exposed rocky seafloors. Past experience has shown that the hardware used to install the split pipe system lacks the reliability and maintenance-free operation required for the life of the cables. Based on previous experience with cable failures, the areas determined to be in greatest need of investigation are fasteners for holding the split pipe halves together, immobilization of the pipe, and cathodic protection for the entire system. As a result, NCEL tested prototype and commercially available hardware components which appeared to be suitable replacements for the existing split pipe hardware. The candidate hardware was then used in a 300-foot-long test section of split pipe installed March 1976 at Anacapa Island, to be inspected during a five-year period.

This report summarizes the candidate hardware investigation, the installation and periodic inspections of the Anacapa Island test installation, and finally the removal and analysis of that test installation.

R-898

Potable Water Treatment for Diego Garcia, Jan 1983, D. B. Chan, J. S. Williams, ADA128756

This report documents an engineering investigation for the development of a cost-effective water treatment system to be used at Diego Garcia. The system must effectively remove or reduce TDS, color, taste and odor, turbidity, and the excessive amounts of organics and microorganisms so that all EPS's drinking water standards can be met. A three-stage water treatment system consisting of a multimedia filter, a carbon filter, and a RO system was tested at Diego Garcia and proved to be the most cost-effective treatment process.

R-899

A Design for a Test Bed Scour Jet Array for Mare Island Naval Shipyard, May 1983, J. A. Bailard, J. M. Camperman, ADA133240

In response to rising dredging costs, the Navy has developed a number of concepts for sedimentation control systems, which serve as alternatives to conventional dredging. One concept, the scour jet array, prevents sedimentation through the scouring action of submerged near-bottom water jets. This report presents the design of a scour jet array test bed which will be used to verify proposed scour equations and to evaluate new design technology. The 66-jet array covers a total of 366 m (1,200 ft) of quaywall and is capable of scouring to distances of 30 m

(98 ft) from the wall. The jet array is powered by a 0.379 m³/sec (6,000 gpm), 336 kW (450 hp) vertical turbine pump. An automatic control system is included that utilizes pneumatically actuated valves and a microprocessor controller. The microprocessor also serves as an instrumentation data logger, facilitating testing as well as routine operational checking.

R-900

Encapsulation of Friable Insulation Materials Containing Asbestos, May 1983, E. E. Lory, M. J. Hienzsich, ADA129872

This document presents information on the encapsulation of asbestos-containing friable insulation materials (FIM). Encapsulation, which is a procedure to seal in asbestos fibers that may be subject to ready release on minimal disturbance, is a new alternative approach to the abatement of hazards from asbestos insulating materials. Encapsulation may be used in specific sites and cases instead of removal of asbestos-containing FIM. This document introduces the facilities architect or engineer to encapsulant materials, established and planned testing criteria, application techniques, the advantages and drawbacks to using encapsulants, and a guide specification for encapsulation of asbestos-containing FIM.

R-901

Concepts for Secure Magazine Doors, May 1983, T. L. Pickett, ADB076816L

The U.S. military has vast stockpiles of weapons and explosives referred to in general as Arms, Ammunition, and Explosives (AA&E). Because AA&E have considerable value to criminals and terrorist groups, they have been classified, by order of sensitivity, into risk categories I through IV. All risk category I and bulk quantities of risk category II AA&E are stored in "standard" magazines (more than 80% are earth-covered). The earth-covered portion of the structure and the headwall have been tested and are considered the most secure components, leaving the door system as the most pressing magazine security problem. The need to solve this security problem has led to the current research and development on magazine door systems. This report discusses existing magazine door security, establishes rational security requirements, and explores the feasibility of achieving these requirements. Several concepts are presented that show promise for greatly improving magazine security at reasonable cost. The concept of laminar construction (layering the proper materials in the correct thickness and sequence) and the concept of using stand-off structures for less secure magazine doors are recommended for advanced development.

R-902

Crows Landing Bomb Damage Repair Test - FRP Membrane Repair Methods, May 1983, P. Springston, ADB077212L

This report documents results of F-4E aircraft test operations on two simulated bomb craters repaired with crushed stone and fiberglass-reinforced polyester (FRP) membranes. Craters of 20 and 40 feet in diameter were excavated in runway 12-30 of the Naval Auxiliary Landing Field, Crows Landing, Calif. Excavation closely approximated actual bomb craters. The smaller crater was repaired with 24 inches of crushed stone and a surface-mounted 3/8-inch FRP membrane. The larger crater was repaired with a section consisting of a 1/8-inch FRP membrane fabricated in place on the surface of backfilled debris, 12 inches of compacted crushed stone, and a surface-mounted 3/8-inch FRP membrane. Both craters were subjected to 49 F-4E operations including constant speed taxis (with and without braking), touch and go landings, and takeoffs. Aircraft operations were conducted in both a heavy (takeoff) and lightweight (landing) configuration. Both wet and dry runway conditions were included. Crater repairs were further tested by trafficking with 1,440 passes (150 coverage) of a load cart simulating a heavyweight F-4E.

Both repair methods were found to be structurally sound. The FRP covers were undamaged by all tests (including braking and wheel spin-up) and provided excellent protection from foreign object damage (FOD). Adequate skid resistance was provided by the dry FRP covers. The wet FRP provided poor skid resistance and recommendations are made for anti-skid coatings. The anchor system was found to be susceptible to damage from slide-in impact of the F-4E tailhook at velocities equal to or greater than 40 knots. (Also published as AFECG ESL-TR-82-36.)

R-903

Pulse Echo Ultrasonic Techniques for Underwater Inspection of Steel Waterfront Structures, Jun 1983, R. L. Brackett, L. W. Tucker, R. Erich, ADA133701

This report presents the results of laboratory and field tests to evaluate the capability of commercially available ultrasonic inspection systems to accurately measure the thickness of submerged steel waterfront structures. The objectives of the laboratory tests were to: (1) determine the measurement accuracy using three different methods of acquiring and interpreting the ultrasonic data, (2) identify operator training requirements and optimum information feedback techniques for the diver, and (3) analyze the electrical power transmission characteristics of the ultrasonic system and identify any potential safety hazards to the diver. Due to the problems associated with multiple front surface echoes, digital ultrasonic thickness gages should not be used as the only means of inspecting steel structures in areas found to have irregular front surface conditions or where the thickness readings are found to fluctuate rapidly over a small area. Field tests of the ultrasonic scanner and surface milling adapter have confirmed that results comparable to those obtained during laboratory tests are attainable during in-situ inspection of steel pilings; since the ultrasonic scanner and milling adapter technique is not truly nondestructive in nature, however, it should be considered an interim inspection procedure. Investigation of alternative inspection techniques that do not require material removal should be continued. A power system test circuit should be incorporated into any 100-VAC circuit used to power underwater ultrasonic test equipment. As an additional safety precaution, inspection divers should be required to wear neoprene wetsuit gloves and should be instructed not to reach through the air/water interface while holding any grounded electronic equipment in their hands. A series resistor-inductor network connected in parallel with the ultrasonic transducer should be incorporated into all cables greater than 100 feet in length to minimize near-surface noise due to electrical impedance mismatching.

R-904

System Definition for Containerizing the Assets of Naval Mobile Construction Battalions, Aug 1983, R. H. Seabold, AD

The objective of the Naval Mobile Construction Battalion (NMCB) Table of Allowance (TOA) container system is to containerize the assets of the NMCB as listed in the NMCB TOA to the maximum extent practical for International Organization for Standardization (ISO) intermodal handling and transportability in a manner compatible with the Department of Defense Container Oriented Distribution System. The NMCB TOA container system may include general purpose containers, special purpose containers, containerized tactical shelters, and self-contained equipment.

Expertise in a relatively specific technology, requiring a knowledge of newly developed products, was employed to define the problem and provide guidance for system acquisition, but nothing was invented and no hardware was developed. System requirements were determined and system criteria were quantified. Economic measures of effectiveness and figures of merit were determined to set economic goals, assess progress, compare alternatives, isolate the

cost of special military features, and also to monitor or prevent cost escalation. Policy is covered in terms of preferences, priorities, and broad procedures. Shortfalls were cited for planning research and development. Several components from the Marine Corps Field Logistics System, the Navy Quick Camp System, and the Department of Defense Tactical Shelter System are recommended.

R-906

Container Marshalling Within a Combat Service Support Area, Nov 1983, P. S. Springston, C. I. Skaalen, AD

The capability of the Navy and Marine Corps to cope with containerized materials in an amphibious environment is severely limited. Currently, there is no established doctrine concerning the marshalling of containers ashore in support of a Marine Amphibious Force (MAF) level amphibious operation in a hostile environment. The objective of this report was to aid in the establishment of such a doctrine and to provide information of use to Marine Corps planners regarding the selection and use of material handling equipment. Concepts for container marshalling were reviewed with the goal of maximizing material throughput within the constraints of earthwork and surfacing construction, support, vulnerability, and the current Table of Equipment. Two alternative concepts for container marshalling were developed - a densely configured, throughput-efficient, relatively vulnerable layout; and a dispersed, less efficient, though more survivable, layout. Both concepts were satisfactory for operation of either of two mixes of material handling equipment. From this study it was concluded that neither the Caterpillar 988B, the Drott 2500, nor a typical commercially available straddle lift is an optimum container handler for Marine Corps requirements. Instead, it was recommended that a marginal terrain capable straddle lift be selected as a container handler for use in a Combat Service Support Area (CSSA). Containers should be loaded with identical items to minimize container handling during unstuffing. An optimum method of container loading prior to mountout and inventory control within the CSSA requires development. Container marshalling areas established in a conventional, high-threat environment should provide for distributed storage of containers as in the Container Distribution Point/Ready Issue Point concept discussed in this report.

include: multi-materials, bottom interaction, nonlinear material properties, material damping, payout reel-in, strumming effects, spatially varying current fields, imposed motions, and random wave loading. Results can be saved and reused during the current execution or at a later date. A free-field input reader is used.

N-1621

Traffic Testing of a Fiberglass-Reinforced Polyester Surfaced and Reinforced Crushed Limestone Base Course for Rapid Runway Repair, May 1982, P. S. Springston, ADB065621L

This report documents traffic tests of a rapid runway repair (RRR) method utilizing dual membranes of fiberglass-reinforced polyester resin (FRP). The test was conducted at the Rapid Runway Repair Test Facility of the Air Force Engineering and Services Center at Tyndall Air Force Base, Fla., during September 1980. A lower membrane, which is field fabricated at the debris-base course interface, reinforces the base course and prevents aggregate from being worked into the crater debris during trafficking. An upper prefabricated membrane functions primarily as a trafficable crater cap, preventing foreign object damage (FOD) to aircraft. The upper membrane also reduces rutting from rolling aircraft wheels in a 12-in.-thick crushed limestone base course overlying backfilled debris. The repair method for medium to large craters consists of the removal of upheaved pavement, backfilling the crater with usable debris to within 12 in. of the runway surface, field fabrication of the lower membrane concurrently with placement of 12 in. of crushed limestone, compaction and grading of the limestone, and positioning and anchoring of the FRP cover. In the tests, applied traffic consisted of 150 and 70 coverages of load carts simulating fully loaded F-4 and C-141 aircraft main gears, respectively. The upper FOD cover anchoring system was successfully tested and found to be capable of withstanding repeated horizontal loadings of 54,000 lb. Recommendations are provided for further evaluation necessary for the certification of the concept for rapid runway repair.

N-1632

Evaluation of NDT Equipment for Specialized Inspection, Jun 1982, G. Warren, ADB068191L

Surveys and evaluations were made of commercially available portable systems for nondestructive test (NDT) applications to the specialized inspection areas of waterfront facilities, cables and wire rope, built-up roofs, and utility/POL distribution and storage facilities. Some success was achieved by adaptation of equipment and techniques used in other NDT applications (e.g., nuclear moisture meters for roofing inspection, ultrasonics for measuring metal thicknesses of underwater structures, and magnetic induction for wire rope and cable inspection). However, NDT equipment state-of-the-art is deficient for providing capability to assess condition of wooden underwater structures, trackage foundations, and POL/utility distribution and storage facilities.

N-1633

An Assessment of State-of-the-Art Methods for Calculating Current Loads on Moored Ships, Jun 1982, P. Palo, R. Owens, ADB068225L

This report presents an examination of techniques for computing current-induced forces and yaw moment on moored vessels based on experimental data or procedures from nine independent sources. No validated full-scale data were located, so only relative evaluations were possible. For the lateral and longitudinal current forces, the nine sources were applied directly (or scaled) to two representative hull types. This comparison shows extreme differences among the nine methods. It is concluded, based on these differences, that the present uncertainty in these state-of-the-art current force predictive methods is $\pm 80\%$ for head currents (longitudinal force) and $\pm 50\%$ for beam currents

(lateral force). Comparisons are also presented for the current-induced yaw moment and water depth (blockage) correction factor. The differences among these latter two are even greater than those for the lateral and longitudinal forces. The Navy's DM-26 approach was found to be inconsistent and can be in error by a factor of 5; the latest draft (90%) of the ongoing revision of that manual (DM 26.6) was considered acceptable except for the longitudinal forces. Because of uncertainties in the scaling criteria, full-scale measurements are recommended to allow proper evaluation of these various methods.

N-1634

STATMOOR - A Single-Point Mooring Static Analysis Program, Jun 1982, J. V. Cox, ADA119979

STATMOOR is a static mooring analysis program written in BASIC language and is one program in a hierarchy of programs developed at the Naval Civil Engineering Laboratory for mooring analysis. STATMOOR analyzes the static response of a single-point moored vessel and hawser. The MENU arrangement of the program lends itself to a user-oriented conversational mode. The user has the option to enter, review, edit input, and obtain calculated results in printed tabular, video tabular, or video graphics form. Steady current, wind, and wave loads are considered. Wind load estimates are considered to be as accurate as the user's knowledge of the wind environment; current and wave loads are in a preliminary form and merit further refinement. STATMOOR was written to demonstrate the utility and ease of use of conversational mode programs and the potential for computer programs to replace bound design manuals. It is unique in that it incorporates recently developed wind load information, can confidently be used with little or no training, and is easily adaptable to most desk top computers.

N-1635

Drag Embedment Anchor Tests in Sand and Mud, Jun 1982, R. J. Taylor, ADB068224L

This report provides the results of conventional temporary and permanent mooring anchor tests in dense fine sand at Port Hueneme and normally consolidated silty clay at Indian Island, includes a preliminary analysis of the data, and provides suggested modifications to improve anchor performance. The data provided can be used to quantify anchor capacity, to guide anchor selection, to improve the understanding of anchor behavior, and to guide the formulation of empirically and theoretically founded schemes to define anchoring capacity. Although the number of tests performed on each anchor during the recent anchor tests in sand and mud was limited, the repeatability of the data was excellent and correlations with previous NCEL tests provided added insight into the specific behavior of the tested anchors and into general anchor and chain behavior. Data for the Two-Fluke Balanced, STATO, MOORFAST, BRUCE Twin-Shank, STEVFIN, PRISMA, and WISHBONE anchors are presented principally as plots of anchor penetration, holding capacity, and shank pitch and roll as functions of anchor drag distance.

N-1636

Dewatering Cofferdam for the TRIDENT Submarine Drydock, Jun 1982, J. B. Forrest, ADA120023

The dewatering cofferdam for the TRIDENT nuclear submarine drydock at Bangor, Washington, presented many challenges. These included water depths up to 25 meters, artesian pressures 10 to 13 meters above mean sea level, difficult pile driving conditions, and the potential for seismically induced liquefaction of the fill in the cofferdam cells. Design ground motions of 0.15g dictated that fill densities exceed 75% density index. Deep compaction was achieved using a large vibratory probe. Inclinometer, strain gage, and optical survey measurements on the sheet piles and extensive piezometric data were obtained. Significant observations were that (1) deep cell compaction can

markedly increase fill density without increasing lateral cell pressures unduly, and (2) maximum interlock tension may be well below the one-quarter height of exposed sheeting as often assumed in design.

N-1637

Desert Water Supply, Jun 1982, J. Crane, ADB068233L
Water supply, treatment, storage, and distribution requirements were assessed in relation to national Marine Corps structures and hypothetical desert scenarios to determine required capabilities and potential shortfalls in current assets. Pieces of equipment currently in inventory or in the procurement cycle were found to be suitable considering the Marine Corps mission and deployment methods. Shortfalls were identified, and recommendations were provided concerning transfer hose, beach intake well points for reverse osmosis treatment, thermal protection for storage and distribution equipment, and ground water acquisition capabilities.

N-1638

100K Propellant Anchor Technology Transfer - Diego Garcia Fleet Mooring Installation, Jul 1982, J. C. Miller, ADB068192L

The Naval Civil Engineering Laboratory (NCEL) has been developing and operating propellant embedded anchors since 1968. Beginning in 1979 this technology was transferred to a field division of the Naval Facilities Engineering Command (NAVFAC) to support fleet operations. In 1980-81, this technology was used to install eleven fleet moorings in the coral bottom of the Lagoon at Diego Garcia B.I.O.T. Ninety-seven anchors were fired; eight failed to hold the required proof load, 100,000 or 150,000 pounds, and one failed prior to proof loading. Data on all shots are presented along with a discussion of operating procedures. The report also documents the technology transfer process.

N-1639

Test and Evaluation of the MagnographTM Unit - A Non-destructive Wire Rope Tester, Jul 1982, L. D. Underbakke, H. H. Haynes, ADA124267

The nondestructive wire rope test device, a unitized AC/DC Magnograph, was tested for operational characteristics prior to acquisition by Naval field activities and start of inspection programs. The Magnograph was tested for loss of metallic area (LMA) and local fault (LF) detection accuracy. Wire ropes 1/2, 3/4, 1-1/8, 1-1/2, 2, and 2-1/2 inches in diameter were tested on a wire rope test track to find the accuracy of the unit. Two mining wire ropes, guy wires of a 1,000-ft-tall tower, and wire rope for 400-, 250-, and 30-ton cranes were used to determine operational characteristics of the Magnograph.

N-1640

An Economic Analysis of Earthquake Design Levels, Jul 1982, J. M. Ferritto, ADA120024

This report presents data on the cost of increasing the seismic design strength of buildings for three strengthening concepts: moment frame, braced frame, and shear wall. Damage is related to drift and acceleration of key elements of the structure. A damage matrix was constructed relating damage to design level and applied loading. An economic analysis was performed evaluating cost of strengthening, the present worth of expected damage, and the probability of site acceleration levels.

N-1641

Operating and Maintenance Experience with a 6-kW Wind Energy Conversion System at Naval Station, Treasure Island, California, Jul 1982, D. Pal, ADA119389

This report describes in detail the experience gained and lessons learned from the 6-kW grid-integrated Wind Energy Conversion System (WECS) demonstration at Naval

Station, Treasure Island, San Francisco Bay. The objective of this demonstration was to develop operating experience and maintenance information on the 6-kW WECS using a combination of permanent magnet alternator with a line commutated synchronous inverter. The on-site measurements conducted during the demonstration indicate that the WECS site has annual average windspeeds of about 8 to 10 mph. The test results to date indicate a satisfactory performance of the WECS except for two failures involving arcing at the electrical terminals located on the yaw shaft. Due to wind characteristics encountered at the site, the performance data collected to date are at windspeeds of 20 mph or lower. For evaluating the WECS performance at all windspeeds, location at a windier site with annual average windspeeds of 14 mph or higher is recommended.

N-1642

An Economic Evaluation of Alternative Methods of Utilizing Available Landfill Gas to Cogenerate Power at NAS Miramar, Aug 1982, C. A. Kodres, AD

The Naval Air Station at Miramar contains the largest active sanitary landfill in San Diego County. It is estimated that the anaerobic decomposition of the organic refuse in this fill is producing sufficient methane to completely satisfy the energy requirements of the base if some means can be found to efficiently utilize this gas as a fuel. An economic evaluation of alternative methods of employing the landfill gas is presented. Among the alternatives examined is the use of the methane as a gas turbine fuel to cogenerate both electricity and steam.

N-1643

Thermal Conductivity of Weathered Polyurethane Foam Roofing, Sep 1982, D. A. Zarate, R. L. Alumbaugh, ADA128767

An investigation of the decay in the thermal conductivity of polyurethane foam (PUF) with time is presented. The polyurethane foams studied included samples removed from sprayed PUF roofing systems on structures at Guam, Marianas Island; Subic Bay, Republic of the Philippines; Denver, Colorado; Clifton, New Jersey; and Port Hueneme, California. Thermal conductivity results closely agree with those predicted for a foam aged at 25°C in a controlled atmosphere. Results also indicate that the foam can provide good insulation characteristics in spite of poor application.

N-1644

Improved Field Performance for Reverse Osmosis Systems, Sep 1982, T. A. Kuepper, ADA124244

The report describes two test programs: the first one involved the physical cleaning of reverse osmosis (RO) membranes by means of flow surging and ultrasonic cavitation. The objective was to clean RO membranes in situ without using chemical additives. It was shown that ultrasonic cleaning is an effective method for removing ferric oxide, calcium carbonate/sulfate scale, and bentonite clay deposits from individual pieces of RO membranes. However, ultrasonic cavitation was not effective when applied to RO membranes in a spiral-wound configuration. Flow surging proved to be an effective method for cleaning spiral-wound RO modules in the preliminary test program conducted. A second test program involved the evaluation of a tubular fabric filter which has the potential of replacing conventional mixed media filters with substantial weight and filter housing area savings. During the test program the filter removed over half of the turbidity of the feedwater used without any chemical additives and could be cleaned intermittently by backwashing.

N-1645

An Automatic Pump Control for MARCORPS AAFS/TAFFDS Pump Sets, Sep 1982, J. Moreland, ADB070800L

An automatic pump control has been developed for Marine Corps POL pump sets. The automatic pump control is designed to increase Amphibious Assault Fuel System fuel throughput while reducing manpower and equipment requirements at pump sets deployed for cross-country transfer of bulk fuel. The Tactical Airfield Fuel Dispensing System will benefit from the automatic pump control because of reduced operator skill level and improvements in personnel and equipment safety.

N-1646

Summary Report of Partial Validation of the Surfzone Transition Analytical Methodology Using the Surfzone Test Vehicle, Sep 1982, J. Miller, ADB070930L

Results from field tests of the full-size tracked surfzone test vehicle (STV) at two sandy beach/nearshore sites were used to investigate some key vehicle performance prediction relations in the trafficability submodel of the computerized surfzone transition analytical methodology (STAM). Analysis of the STV test results demonstrated that STAM equations for predicting the drawbar pull and total motion resistance of tracked vehicles are adequate and, in fact, slightly conservative for nearly all coarse-grained soil/tracked vehicle/ vehicle submergence conditions. Finally, suggestions were presented for needed model and prototype testing to validate prediction relations in STAM's other two submodels--the water force calculations and vehicle stability submodels--as well as prediction relations in yet unvalidated parts of STAM's trafficability submodel (primarily relations for obstacle override and for tracked vehicle operation in fine-grained soil nearshore areas).

N-1647

Microbiological Defacement of Navy Buildings, Oct 1982, R. W. Drisko, T. B. O'Neill, J. R. Moses, ADA124245

A survey was made of mildew problems at selected Naval activities in Hawaii and the Western Pacific. A list of factors affecting mildew growth was developed along with recommended practices to control the growth. A list of EPA-approved mildewcides is presented.

N-1648

Longevity of Propellant-Embedded Anchor Downhaul Cables: Initial Tests of Rope and Chain, Nov 1982, D. B. Jones, ADB073717L

The propellant-embedded anchor is a projectile that is driven vertically into the seafloor by a propellant charge in a gun. Anchors with nominal capacities of 10, 20, and 100 kips (45, 90, and 450 Newtons) have been developed. The downhaul cable is the length of line that connects the buried anchor to the rest of the mooring leg. The service life of this line is controlled by the varying degrees of corrosion, abrasion, and fatigue to which it is subject. Operational experience has provided little information on the service life of wire-rope downhauls, the only kind used thus far.

Laboratory tests were initiated to identify resistant downhaul cable materials. In these tests, the degrading processes in a seabed of quartz sand were simulated. For wire-rope specimens, loss of material through abrasion appeared to be important; however, failures occurred because of bending fatigue, compounded by corrosion. Nylon-rope specimens with and without surface coverings failed through external abrasion; a polyurethane sleeve provided the best abrasion protection.

Firing tests of 7/8-inch chain downhauls, proposed for the 10- and 20-kip anchors, showed that the chain can withstand the large acceleration experienced during firing of the projectile. However, the use of chain requires redesign of the projectile to balance the inertial load.

N-1649

A Model for On-Offshore Sediment Transport in the Surfzone, Dec 1982, J. A. Ballard, ADA124235

An energetics-based surfzone sediment transport model is evaluated for its ability to predict on-offshore sediment movements using nearshore sediment transport study current meter and beach volume measurements. The magnitude and distribution of pertinent wave velocity moments are also evaluated from the same data set. The latter were found to be linear functions of the significant wave height. Results of the study showed that the current meter data were of insufficient length to evaluate the sediment transport model's validity. A simplified version of the model coupled with estimated wave velocity moment regression equations was found to mimic observed beach volume variations as a function of wave height.

N-1650

Marine Corps Cold Weather Water Supply, Jan 1983, T. A. Kuepper, ADB073370

The Cold Weather Water Supply report defines cold weather regions and discusses water supply methods and equipment in terms of the following categories: detection, acquisition, treatment, storage, and distribution. Current and future water supply capabilities are examined and evaluated and specific recommendations are presented within the five water supply categories.

N-1651

Temperature Determination in Hush House Augmenter Tube With Multi-Colored Temperature-Indicating Paints, Dec 1982, E. L. Correa, ADB073716L

Temperature-indicating paints were used to determine if overheating temperatures occur in the liner plates in a hush house augmentor tube during in-frame engine testing of the F-14 aircraft. Several midheight stations along each side of the augmentor tube, prepared with a predetermined array of these paints, were subjected to the high temperature exhaust gas from an F-14 aircraft engine while in afterburner. During these tests the temperature peaks were found to be extremely sensitive to the longitudinal alignment of the F-14 aircraft to the centerline of the augmentor tube. Slight yaw misalignment of the aircraft resulted in peak temperatures as high as 1,350°F resulting in incandescence of portions of the liner plates. Straight alignment of the aircraft yielded peak temperatures of 1,000°F. This investigation also showed that use of temperature-indicating paints can be a practical and valuable technique for surface temperature measurement in a hot gas environment.

N-1652

Nonlinear Structural Analysis of a Large Aluminum Arch Rib, Jan 1983, T. A. Shugar, ADB073715L

A static, geometrically nonlinear structural analysis of a large aluminum alloy arch rib is described. The arch rib is the primary structural element in the design of a relocatable hangar for the Navy P-3 aircraft. Three load cases are included: an 80-knot wind load, a 40-psf symmetrical snow load, and a 40-psf partial snow load. The structural model consists of 47 straight beam elements and 48 nodes, and both a pinned end condition and a fixed end condition were analyzed. The nonlinear analysis was conducted with ADINA, a general purpose structural analysis computer program.

The symmetrical snow load was found to be the most severe load case. The nonlinear load/deflection behavior of the arch rib exhibited load softening behavior for snow loads and load-hardening behavior for wind load. Maximum deflections were on the order of the depth of the arch rib section, and maximum fiber stresses were less than 65% of the yield stress for the aluminum alloy material. The aluminum arch rib structural design is shown to be satisfactory as contrasted with a previous compound fiberglass arch rib design which did not sufficiently limit in-plane deflection.

N-1653

Water-in-Oil Emulsion as a Boiler Fuel, Jan 1983, T. T. Fu, ADA128773

Extensive tests have been conducted in an in-service boiler to determine the measurable benefits of firing water in no. 6 oil emulsions. Emulsions of 3, 5, 9, and 12% water concentrations have been fired during normal boiler operations. Although the emulsions could be fired satisfactorily without modifications to boiler equipment, the test results show that improvements, if any, in overall boiler efficiency or emissions were ambiguous.

N-1654

Sulfur Oxides Control Burner, Jan 1983, D. E. Williams, ADA128772

A new approach to burning coal in industrial-size boilers without being constrained by the sulfur content of the fuel was investigated. Coal combustion with the injection of a lime sulfur sorbent was evaluated using an equilibrium combustion computer program. Subsequent experimental work with a flame tube apparatus demonstrated that lime does react effectively with hydrogen sulfide in a low temperature, fuel-rich flame. Applications for this approach include both existing boilers designated for other fuels and new boilers designed for coal firing.

N-1655

A 20-kW Wind Energy Conversion System (WECS) at the Marine Corps Air Station, Kaneohe, Hawaii, Jan 1983, D. Pal, ADA128761

This report describes the field evaluation of a 20-kW wind energy conversion system (WECS) installed in September 1978 at the Marine Corps Air Station (MCAS), Kaneohe Bay, Hawaii. The wind turbine generator chosen for the evaluation was a horizontal-axis-propeller-downwind rotor driving a three-phase, self-excited alternator through a step-up gear box. The alternator is fed into the base power distribution through a three-phase, line-commutated-synchronous inverter using SCRs. The site has moderate wind conditions with an annual average windspeed of 12 to 14 mph, and the WECS turbine has a relatively high (29 mph) rated windspeed. The 20-kW WECS system was primarily designed to obtain operating experience with, and maintenance information on, a 20-kW-sized WECS. This report describes in detail the experience gained and lessons learned during the field evaluation.

N-1656

Experimental Polyurethane Foam Roof Systems - II, Jan 1983, R. L. Alumbaugh, J. R. Keeton, E. F. Humm, ADA126315

An experimental roofing installation is described in which polyurethane foam (PUF) was spray-applied directly to metal Butler-type metal decks, the roof divided into five approximately equal areas, and the PUF protected with five different elastomeric coating systems. Three of the coating systems were damaged by hailstones about a year after installation; these systems were recoated within 3 years of the initial installation. The current coatings include two of the original coating systems--a plural component silicone and a single component silicone--and those applied over the three systems damaged by hail--a single component silicone, an aluminum filled, hydrocarbon-extended catalyzed urethane, and a catalyzed urethane. The performance of these five PUF systems over a 7-year period is reported. The temperature distributions throughout the roof systems are described. The decay in the thermal conductivity of the PUF roof over a 5-year period is presented, and the energy savings realized by foaming the roof are presented.

N-1657

The Remote Data Recorder: An Onboard Recorder for the Magnograph™ Nondestructive Test Wire Rope Sensor Head, Feb 1983, L. Underbakke, AD

The remote data recorder allows the sensor head of the nondestructive test wire rope inspection device, the Magnograph™, to be used without being hardwired to the electronic recorder module. This allows the inspection of wire ropes in remote, hazardous, or inaccessible locations. This report describes the portable data recorder and presents the results of tests performed to evaluate its effectiveness in inspecting wire ropes that are inaccessible to close visual inspection.

N-1658

Control Strategies for Reducing Heating, Ventilating, and Air Conditioning (HVAC) Energy Consumption in Single Buildings, Mar 1983, R. E. Kirts, ADA128748

This report presents a discussion of the most common control strategies and equipment used to reduce the amount of energy consumed by heating, ventilating, and air conditioning (HVAC) systems. Two basic concepts are discussed: (1) bringing the existing control system up to design specification while retaining the original control strategy, and (2) employing a new control strategy. The new control strategies analyzed are scheduled start-stop, day-night setback, optimum start-stop, dead band control, duty cycling, demand limiting and load shedding, economizer and enthalpy cycles, scheduled temperature reset, chiller control and chilled water reset, boiler control and hot water temperature reset, and condenser water temperature reset. Recent developments in HVAC control system hardware, such as pneumatic systems, electropneumatic systems, digital-electronic systems, and microcomputer-based control systems, are also discussed. The strategies are described and compared to each other in terms of cost effectiveness. The BLAST computer program is used to evaluate the various control strategies. The results illustrate the energy-saving potential of simple strategies, such as night and weekend setback and scheduled start-stop, which are inexpensive to implement and should be installed in most buildings. The most complex strategy is not necessarily the most effective due to the interactions between the building, climate, and HVAC system.

N-1659

A Parametric Examination of the Heat Recovery Incinerators at NAS Jacksonville, Mar 1983, C. A. Kodres, ADA128764

A mathematical model is developed to simulate the operation of the heat recovery incinerators at NAS Jacksonville. The model is used to conduct a parametric examination of the facility. Airflows, including leakages, are the dominant parameters affecting operation of the HRI. Because of poor airflow control, and partly because of air leakage, the Jacksonville HRIs rarely operate in the starved air mode they were designed for.

N-1660

Development of High-Capacity Expedient Anchors for Shore-side Military Application, Mar 1983, K. Rocker, ADB073727L

This is an interim report on the development of equipment and procedures for installing plate embedment anchors of known capacity under field conditions. The report lists Navy needs, discusses historical solutions, and recommends a procedure for sizing and placing anchors using nonspecialized personnel and man-portable equipment. The report summarizes the equipment evaluation and the remaining work required on equipment and analytical procedure development.

N-1661

Test and Evaluation of the MT 75 Rope Tester - A Hand-Held NDT Wire-Rope Inspection Device, Mar 1983, L. D. Underbakke, ADA 28790

The nondestructive wire rope tester, MT 75, was investigated, tested, and evaluated in order to fill the gap between the hand-held log inspection and the large unitized AC/DC wire rope inspection device. The MT 75 can provide better information on the condition of the wire rope than can be obtained by using the "rag and visual" inspection method.

N-1662

Measurement of Full-Scale Current-Induced Forces and Yaw Moments on a Destroyer, Apr 1983, P. A. Palo, ADB0768081.

This report summarizes full-scale tests on the current-induced forces and yaw moments on two World War II destroyers. The vessels were moored in the open ocean with bow and stern lines, and measurements were taken of the mooring line tensions under various wind, wave, and current excitations at different angles of attack. The resulting current load data were analyzed using three independent methods and are considered reliable. Analysis of the data shows that the stern appendages had a large effect on the total loads, which would be increased if propellers had been present.

The data are the first known reliable data for the validation of state-of-the-art current load methodologies. An estimate was also made of asymptotic fouling resistance, which is the first known. Measured wind loads are also compared to expected values.

Because the resulting data apply only to a single, badly fouled destroyer without propellers excited by low (up to 0.4-knot) currents in deep water, it is necessary that further current load testing be performed to adequately validate state-of-the-art methods for calculating current-induced loads for arbitrary vessels and water depths.

N-1663

Utilizing the Optimum Start/Stop Control Strategy for Heating Naval Civil Engineering Laboratory, Apr 1983, I. Sanchez, ADA129257

NCEL has successfully implemented a single-building controller that measures indoor and outdoor temperatures to determine optimum times to start and stop steam heat. Significant energy and dollar savings have been demonstrated. Operating experience with the controller and details on its hardware and software are presented in this report.

N-1664

An Investigation of the Indirect Boundary Element Method in One- and Two-Dimensional Elastostatics, May 1983, T. A. Shugar, J. V. Cox, ADA133142

This report presents a study of the indirect boundary element method and its potential advantages for solving one- and two-dimensional linear structural/stress analysis problems. The theoretical formulation of the indirect boundary element method is illustrated first by developing the framework of one-dimensional beams resting on elastic foundations, and then extending the same concept to the framework of two-dimensional plane stress or plane strain elastostatics. Computer programs are written both in BASIC and FORTRAN that numerically implement the theoretical formulations for the one-dimensional application. The program for the two-dimensional application is written in FORTRAN. Accuracy of the indirect boundary element solution is assessed through comparison with theoretical solutions and with solutions from the alternative, direct boundary element method. With regard to edge effects, the

indirect boundary element method fared better than the particular direct boundary element implementation that was available for comparison. The results pertaining to the accuracy of the indirect boundary element method to correctly capture stress gradients were very encouraging, even for the constant stress elements employed. The results suggest that the method may be a very economical analysis tool for determining stress concentration factors in elastostatics. Because the necessary input data requirements are less and smaller matrices result, the boundary element methods are more suited to small computers, thus enhancing the use of the methods as effective stress analysis tools.

N-1665

Low Cost Material Testing for Hush House Dry Augmentors - Phase I Results, May 1983, E. Correa, ADB074245L

Less expensive (but comparable) substitute acoustic pillows and liner plates were evaluated for use in aircraft hush houses. Four trial acoustic pillows made of lower cost "Thermal Insulating Wool" (fiberglass) and four trial liner plates made from type 409 stainless steel were tested. Only limited operational time has accumulated on these trial materials. However, on the basis of preliminary findings, both materials have functioned satisfactorily in the lower temperature regions of the augmentor tube, but not well in the higher temperature regions. The fiberglass pillow filler material has a potential for only a 1% pillow cost savings with a markedly reduced safe operating temperature. The liner plate material has a cost saving potential of 12%, but also has less attractive mechanical properties that require additional evaluation prior to recommendation for design.

N-1666

Computer Simulation of Buildings Cooled by Natural Ventilation, May 1983, S. Ashley, ADA133107

This report presents general information covering the experimental and theoretical basis used to develop the computer simulation of natural ventilation cooling of buildings. Computer input and output and an application example are included. The computer program predicts ventilation rates, mean interior air speed and direction of air flow, interior temperatures, and interior and exterior effective temperatures for a given set of conditions. These conditions are: wind velocity, ambient air temperatures, air leakage characteristics of openings, the mechanically induced air flow rates, type of building construction, interior heat loads, and the number of people in the building.

The application of this computer model includes the study of the natural ventilation performance of a building, the influence of natural infiltration on mechanical ventilation systems, and the study of smoke in the event of a fire.

N-1667

Development & Testing of a Single Point Mooring (SPM) Fuel Buoy for Amphibious Logistic Support, May 1983, G. Bretz, ADB076858L

Increased Marine Corps fuel consumption rates, coupled with the retirement of the Navy's small tankers, demanded a change in the Navy's fuel supply capability. The SPM fuel buoy, utilized in conjunction with commercial fuel tankers, was developed to provide this capability. The SPM buoy is a lightweight (less than 70 tons), easily installable version of the commercial catenary anchor leg buoy system. It will be used to deliver in excess of 1 million gallons of fuel per day from up to 10,000 feet offshore. The major stages in the development of the SPM buoy system as reported herein include: conceptual design, model studies, final design, construction, acceptance testing, full scale development testing (DT-II), and

full scale developmental testing to support the first major production decision (TECHEVAL). The engineering results for each of these developmental stages are presented. The installation of the SPM fuel buoy in its present stage of development represents a complex, highly sophisticated construction project. Testing has shown that this project is within the capabilities of an Amphibious Construction Battalion utilizing existing unit assets.

N-1668

Summary of DT-II Tests for COTS Temporary Container Discharge Facility, May 1983, J. J. Traffalis, G. Bretz, ADB076834L

A series of controlled tests was conducted with a Manitowoc 4100 Series 3 ringer crane to obtain technical data in order to prepare specifications for future TCDF crane procurements. The purpose of this report is to abstract and reference all preliminary reports into one summary report covering the COTS-TCDF DT-II test program.

N- 669

Charts for Predicting Response of a Simple Spring-Mass System to Bilinear Blast Loads, Jun 1983, J. S. Hopkins, ADB077257L

Charts are presented for rapid prediction of the dynamic response of a simple spring-mass system subjected to a bilinear blast load. Such a loading represents the design blast loading on either the exterior or interior faces of a structure from an explosion located either inside or outside the structure. Predictions from the charts are within 10% of exact solutions for most applications. The charts are also useful in identifying the relative importance of design parameters on dynamic response and the range of parameters for which simple approximations are justified without introducing significant prediction errors.

N-1670

Axial Tension Testing of Horizontal Connectors for Use With Intermodal ISO Containers, Jul 1983, R. H. Scabold, B. Posadas, ADA133670

The results of a static test to determine whether a Line Fast Corporation Tandemloc Connector meets the tensile requirements for use with ISO containers in the Marine Corps Container System and the NMCB TOA Container System are presented. Sixteen connectors were tested. The maximum applied forces were measured, recorded, and then compared with the rated capacity. The connector met the tensile requirements and should be qualified for use with both container systems.

N-1671

An Economic Analysis of Earthquake Design Levels for New Concrete Construction, Jul 1983, J. M. Ferritto, ADA133144

This report presents data on the cost of seismic strengthening for a new concrete structure for two strengthening concepts: moment frame and shear wall. Damage is related to drift and acceleration of key elements of the structure. A damage matrix is constructed relating damage to design level and applied loading. An economic analysis is performed evaluating cost of strengthening, the present worth of expected damage, and the probability of site acceleration levels.

N-1672

1982 Inspection of Experimental Marine Piling at Pearl Harbor, Hawaii, Jul 1983, T. B. O'Neill, ADA133149

The Navy is considering alternative wood preservatives that are environmentally acceptable. In order to determine the effectiveness of wood preservatives in the marine environment, the Naval Civil Engineering Laboratory (NCEL), in

cooperation with industry, installed pilings with test preservatives in Pearl Harbor, Hawaii, in 1963 through 1966 and has observed and evaluated the preservatives. Certain chemicals, such as the chlorinated hydrocarbons, chlordane, and dieldrin, have demonstrated outstanding preservative qualities; the use of such preservatives, however, in the marine environment is subject to EPA restrictions. Basic zinc sulfate is an environmentally acceptable preservative that appears to show promise; its effects on the mechanical properties of wood should be more thoroughly investigated.

N-1673

Fluidized Bed Air-to-Air Heat Pump Evaporator Evaluation, Jul 1983, J. L. Ashley, ADA133072

Frost formation of air-to-air heat pump evaporator surfaces reduces unit efficiency and restricts geographic application. The use of a fluidized bed heat exchanger as an air-to-heat pump evaporator was investigated to determine if frost accumulation could be eliminated. Experimental investigations were conducted and the following results obtained: (1) frost accumulation was insignificant with fluidized bed temperatures below 32°F and (2) moisture accumulation from condensation resulted in unstable fluidized bed operation when the fluidized bed temperature was above 32°F. Several concepts--maintenance of bed temperature below 32°F, reverse refrigerant flow, air-dry bed, nonadhering bed material, and ultrasonics--to solve the moist bed problem were evaluated, with no practical solution being developed. The use of a fluidized bed heat exchanger with air-to-air heat pump evaporators was determined not feasible.

N-1674

Utilization of Navy-Generated Waste Oils as Boiler Fuel - Handbook of Guidelines and Field Survey Results, Jul 1983, T. T. Fu, C. Semien, ADA133717

This technical note provides information for a variety of users at different levels of management and operation. Part 1 contains background information on waste oil generation and a survey of waste oil disposition. Part 2 provides pertinent information to Public Works Officers and planners. Topics include: source of waste oil, a survey of disposition of waste oil, restrictions on use as fuel, boiler fuels, air quality considerations, and economics. Part 3 provides procedural information to operators using waste oil as boiler fuel. Waste oil handling, pre-burning treatment, burning methods, equipment modifications, and operational requirements are discussed. Part 4 consists of: a comprehensive survey of the potential for utilizing waste oil by Navy/Marine Corps activities and a compilation of the reported experience of waste oil users.

N-1675

Vulnerability of High-Efficiency Solid State Fluorescent Ballasts, Aug 1983, W. Weir, ADB077253L

High-efficiency, solid state fluorescent ballasts are more vulnerable to the transients and surge voltages present in low-voltage AC power circuits than their electrical ancestors of the 1960s; thus, an investigation was conducted to determine the vulnerability of these more efficient devices to electrical transients and, if appropriate, to determine what protection would be needed to prevent future failures. Three sample ballasts were procured and tested using the Institute of Electrical and Electronic Engineers (IEEE) Standard 587-1980 as a reference. Tests were made to determine vulnerability for normal mode injection and for three variations of common mode injection. Both the THOMAS and TRIAD ballasts passed the IEEE Standard 587-1980 Category A tests; therefore, no additional transient protection should be required. The EE TECH ballast failed, as it could only withstand surges up to 4 kV. Many facilities, however, do not experience transients this high, so if EE TECH ballasts have been

installed and are working properly, there is little cause for alarm. But until such time as the EE TECH ballasts have been certified to pass the IEEE tests, it is recommended that General Electric V130LA10A metal oxide varistors be installed for ballast protection.

N-1676

Plastic Composite Panel and Grid-Reinforced Soil Repair Method for Bomb-Damaged Airfield Pavements, Aug 1983, P. S. Springston, R. Claxton, ADB077668L

This report documents the development and traffic testing of a panelized matting system fabricated of fiberglass-reinforced polyester (FRP) resin. An FRP panel system was developed wherein individual panels could be rapidly linked together to form a foreign object damage (FOD) cover for use in rapid runway repair or expedient runway surfacing. Ten panels were fabricated and assembled to form a 27- by 30-foot crater cover, which was used in conjunction with an aluminum, honeycomb, grid-reinforced sand base for a simulated bomb crater repair. The simulated crater test section was traffic tested with 10, 72, and 100 coverages of C-130, F-4, and C-141 load cart traffic, respectively. The FRP panels sustained all applied traffic without damage. As a result, the FRP panel system is recommended as a crater repair cover for crushed stone and grid-reinforced sand repair methods. The FRP/sand grid system is recommended for repair of runways subjected to C-130 and F-4 operations. Research of a modified FRP/grid repair system using a thin, FRP reinforcing membrane at the sand/debris interface should be conducted.

N-1677

Diver-Operated Sediment Excavation Tool, Sep 1983, H. Thomson, ADA133640

Underwater construction tasks frequently require the removal of seafloor sand and sediment. An experimental sediment excavation tool was fabricated from commercially available and specially designed components. The diver-operated tool combined a jet-educator, a jet nozzle and a hydraulically powered sump pump into a jet-dredge tool to increase excavation rates, reduce reaction forces, and improve water visibility in jetting operations. A later version included multi-jet nozzles rather than a single jet nozzle. Engineering tests of the experimental tool and all candidate components were conducted. The test results are presented in this document and show that the tool is effective. The next step in development is suitable engineering design for use by Fleet units.

N-1678

Installation of a Single-Building Energy Controller at the Public Works Center, Naval Weapons Center, China Lake, Sep 1983, K. J. Canfield, AD

Single-building energy controllers can be installed in many buildings to conserve energy. These systems can provide significant energy savings with limited investment. This report details the installation of a single-building energy controller in the Public Works Center building at Naval Weapons Center, China Lake, Calif. The controller was installed by NCEL and Public Works personnel in about 3 days, and is working very well. The reasons for the success are a reliable controller, a dedicated user, and the patience and cooperation of the building occupants.

N-1679

Thermal Energy Recovery in Gas Turbine Engine Test Cells, Nov 1983, C. A. Kodres, AD

The economics of thermal energy recovery in jet engine test cells is examined. A numerical model to simulate the test cell augmentor tube is developed. This model is employed to determine the feasibility of installing heat

exchangers along with the augmentor or at the augmentor exit and using these heat exchangers to generate steam or electricity from the thermal energy in the jet exhaust.

In general, energy recovery is not practical. The exhaust is quickly diluted by the entrained augmentation air, decreasing temperature gradients necessary for heat transfer. Most test cells are used too infrequently to warrant the cost of the hardware.

N-1680

Navy-Lightered Pontoon Causeway Structural Analysis, Elevated Pier Facility, Nov 1983, F. R. Johnson, J. L. Sullivan, AD

This report documents the structural analysis of the elevated causeway system (ELCAS) for the Container Off-loading and Transfer System (COTS) for special application. These include lifting of 35-long-ton, 40-foot containers at a 40-foot operating radius from a lighter in the open sea and employing the elevated causeway in a harbor environment with a 40-foot water depth. The structural analysis confirms that the ELCAS can be used for the special application. However, additional interior piles are required on each pier head section.

N-1681

NCEL Ocean Platforms Seminar, Nov 1983, D. R. Shields, AD

The NCEL Ocean Platforms Seminar was held on 11-12 January 1983. Eleven experts, selected to represent the major disciplines relevant to ocean platforms, were invited to present papers and discuss R&D needs. The state-of-technology in ocean platforms was identified and R&D topics defined. This report provides the papers presented at the seminar and the conclusions from each participant concerning R&D needs.

N-1682

Diver-Installed Seafloor Fasteners, Nov 1983, H. Thomson, K. Rocker, AD

Underwater construction operations frequently require efficient and reliable seafloor fastening systems. New equipment and procedures for the installation of these systems by divers have been developed for use in soft coral and sand regions. Grouted fasteners proved to be stronger and more reliable than previous fastening systems in coral. In addition, the use of a newly developed grout dispensing tool proved to be an efficient and highly improved method for underwater grouting by divers. Seafloor fastening in sand was accomplished by plate embedment anchors driven into the seafloor by a hydraulic-powered jackhammer. Four sizes of anchors were driven at two underwater and one surfzone site. A pullout device was constructed to key the anchors, measure pullout load as a function of vertical travel, and to retrieve the anchors for reuse. The method for predicting plate anchor holding capacity and important parameters that affect capacity are discussed. Curves for predicting the short-term holding capacity of four small anchors driven to depths between 3 and 8 feet are presented for five types of sand seafloors. These data are recommended for estimating field anchor holding capacity. Test device pullout loads recorded for the installed anchors are reported and compared with pullout loads predicted for the unusual loading condition imposed by the test device.

N-1683

Underwriters Laboratories Fire Tests of Sprayed Polyurethane Foam Applied Directly to Metal Roof Decks, Dec 1983, R. L. Alumbaugh, S. R. Conklin, AD

The Naval Civil Engineering Laboratory has conducted extensive fire testing of sprayed polyurethane foam (PUF) roof systems applied directly to metal roof decks. Testing

was conducted at Underwriters Laboratories (UL) and the work was sponsored by the Naval Material Command and the Naval Facilities Engineering Command. The work was conducted in three phases with the first phase being directed toward PUF systems applied principally to standing seam metal decks, the second phase toward PUF on corrugated metal decks, and the third phase toward PUF applied to fluted metal decks.

The fire test program was most successful. Results showed that the PUF roof systems performed as well as, if not better than, the standard built-up roof system. This report provides details of the test program, the roof deck construction classifications that resulted from the tests, and a listing of over 100 PUF roof systems that are now classified under the three Roof Deck Constructions. These classified systems meet the fire safety criteria (specifically DOD and Navy criteria) and can be used on appropriate metal roof decks at Naval Shore Activities.

N-1684

Design Guidelines for Heating Aircraft Hangars With Radiant Heaters, Dec 1983, E. L. Correa, AD

An investigation was conducted on the use of radiant heaters to reduce the cost of heating aircraft hangars. Those best suited for space heating aircraft hangars were found to be the gas-fired, high-intensity, porous, refractory-infrared heaters. Radiant heaters provide increased thermal comfort for personnel while substantially reducing heating costs. Considerable fuel is saved by: (1) allowing a lower interior air temperature to be maintained while providing personnel comfort, (2) reducing heat stratification, (3) reducing fuel consumption with high efficiency burners, (4) reducing building heat loss, and (5) heating only occupied areas rather than the whole building. This report includes the principles of radiant heating in hangars, guidelines for optimum system design, and discussion of the physiological aspects of radiant heating. Cost analysis procedures are given for determining the cost-effectiveness of the radiant systems for comparison with other types of heating systems.

Four alternative means for utilizing WDF - adding incinerators, replacing boilers, modifying existing boilers, and making hybrid conversions - were considered for each class. Incineration and modification of existing boilers were emphasized. These alternatives appeared to be the most feasible ones for near-term implementation.

Problems encountered, system modifications required, and costs associated with the alternatives in the classes were defined as clearly as the accuracy of the available data would allow.

The major conclusions of this portion of the project are:

- Although it is technically feasible to adapt Navy energy conversion systems to fire WDF in one or more of its forms, the optimal form selected should be a site-specific total system.

- Near- to intermediate-term programs should probably continue to give first consideration to waterwall incinerators and to the cofiring of solid WDF in coal-capable plants because these options are the ones most completely developed and documented.

- Package incinerators and conversions of oil burning plants to fire a sluff form of solid waste fuel may be the options with the greatest potential for the intermediate term because waterwalls would be uneconomical in many small plants and because the majority of medium-sized oil-burning plants will not be converted to burn coal.

- Pyrolytic processes to produce gaseous and liquid fuels have not been sufficiently developed as yet to be specified for commercial operation. However, these forms of WDF have widespread potential applicability. If they (liquids in particular) become available, they could become the most cost-effective alternatives; using them would minimize the necessary modifications of existing energy conversion systems. Probably 5 years or more of development and testing will be needed before the future of pyrolysis is clear.

CR 80.003

Characterization of Navy Solid Waste and Collection and Disposal Practices, R. E. Freeman, A. G. Capps, Menlo Park, Calif., SRL International, Oct 1979, N00123-78-C-0868, ADA080322

The 1976 Resource Conservation and Recovery Act encourages the recovery of material and waste derived fuels to the maximum extent practicable at federal facilities, while complying with all state and local requirements as well. The Navy's Solid Waste research project is designed to identify and develop cost effective alternatives for meeting RCRA requirements. To meet this objective, an immediate need of the project was to quantify and characterize the recoverable material contained in the Navy waste stream and to compile information on how these materials are handled at typical Navy installations. The work was concentrated in two areas: compiling and analyzing available data about Navy solid waste composition and generation, and developing a set of realistic descriptions of typical Navy solid waste handling practices.

For waste composition and generator rate, data available from the NACWIS data base, including R⁴ surveys conducted under the direction of the Naval Environmental Support Office (NESO), were compiled and analyzed. Navy facilities were listed in classes according to the amount of waste.

A simplified technique was examined for estimating quantities of the various recoverable resources generated by a Navy installation. This technique was tested against data obtained from the R⁴ surveys mentioned above. The test was aimed at evaluating this relatively low-cost technique for possible use in augmenting Navy solid waste data to enable adequate field planning, selection, and preliminary sizing of Navy resource recovery systems. The technique requires a series of field observations of the volumes of waste generated and the waste's origin to estimate weight and composition. Once the bulk densities are thus derived, a few periodic volume observations will establish trends and cycles.

Existing information concerning current Navy practices for handling its solid waste was also derived from R⁴ survey results obtained by the Navy. The information includes an indication of the type of personnel involved in the collection, the type of disposal methods used, useful life of landfill sites, and whether the landfill is on Navy property. The format in which the data are compiled was intended to enable the establishment of classes for collection and disposal methods and the indication of the number of Naval installations in each class.

This report also includes a brief analysis of how Navy and all other landfills will be affected by RCRA and the Safe Drinking Water Act (SDWA).

CR 80.004

Survey of Naval Port Fender Systems, Oxnard, Calif., VSE Corporation, Dec 1979, N00123-78-C-0391, ADA080564

A survey of Navy pier fender systems was conducted to evaluate the need for an RDT&E program leading to improved fender systems. Eighteen major activities were surveyed by mail, and on-site visits were made to activities in San Diego and Norfolk. The survey revealed:

- An overall poor to fair condition for pier fender systems except where repair by replacement was being accomplished by large-scale projects.
- A trend towards increasing costs and a declining quality of timber materials.
- An overriding concern for the frequency and magnitude of damage by ships and craft.
- A uniformity in problems, damage, and level of maintenance costs but a lack of uniformity in approaches to improvements and solutions.
- Improvements in design and materials for timber pile fender systems in San Diego that may well be applicable to general purpose berthing at most other locations.
- A need for concentrated, centralized work to improve camel and fender designs for submarines, carriers, and certain special use berthing.

Recommendations resulting from the survey include:

- That no RDT&E effort is needed for general purpose berthing, but coordinated facilities acquisition and management efforts are needed to evaluate and implement certain specific improvements in timber pile systems.
- RDT&E work in the near timeframe for dedicated submarine, CV/LHA, and certain special use berthing.
- Initiation of a long-range study that looks to the time when wood products may not be available in the quantity and quality now depended upon for ship fendering.

CR 80.005

Waste Fuel Utilization in Existing Boilers on U.S. Naval Bases, H. I. Hollander, J. E. Broderick, J. G. Klett, Reading, Pa., Gilbert Associates Inc., Jan 1980, N00123-78-C-0868, ADA081261

The 1976 Resource Conservation and Recovery Act encourages the recovery of material and energy from waste to the maximum extent practicable at federal facilities while complying with state and local requirements. The Navy's solid waste research project is designed to identify and develop cost effective alternatives for meeting RCRA requirements. Additionally, to reduce Navy dependence on dwindling supplies of natural gas and fuel oil, the Navy has issued guidelines concerning the construction of intermediate and larger boiler plants requiring the capability to burn solid forms of fuel, including waste derived fuels as well as coal.

This report provides perspective on the ramifications of firing solid forms of waste derived fuel, separately or in combination with conventional fossil fuels for existing or new installations. The report is divided into two parts.

The first part presents a general discussion of typical characteristics of proposed waste fuels and the potential of utilizing these fuels in existing Navy boilers. The second part is a case study addressing a typical installation, and assesses the changes, capital costs, and potential problem areas that may be encountered in accommodating waste fuel firing.

Based on a site inspection at a three-boiler Navy plant, a conceptual retrofit layout was prepared of a practical system to cofire a waste fuel with the existing fossil fuel. The boiler plant selected routinely fired natural gas and fuel oil. The waste fuel selected was a solid form of shredded waste (nominally 2-in. particle size with most glass, metals, and other inerts removed). The case study revealed that if the wastes were suitably prepared, approximately 60 TPD could routinely be consumed with 120 TPD total system capability based on the waste fuel providing 20% of the Btu input requirements during full load operation.

Base loading two retrofitted boilers at their design capacity and accommodating all steam load swings with the conventional fuel fired third boiler could displace more than 200 barrels of oil per day. At 35 cents per gallon, the annual savings in 1978 fuel costs would amount to over \$1,000,000. Not only is there a potential fuel cost avoidance of more than \$1,000,000, but there should also be some disposal cost avoidance, although counterbalanced at least in part by the costs for producing RDF. With the significant volume reduction of wastes to be landfilled, the effective life of the land area for this purpose will be materially increased.

CR 80.006

Application Potential of Energy Systems at Navy Sites, vol 1: Methodology and Results; vol 2: Navy Energy Siting (NES) Computer Program User's Manual, S. J. Anderson, M. D. Jackson, S. J. Chaump, Mountain View, Calif., Acurex Corporation, Oct 1979, N68305-78-C-0009, ADA081381 (vol 1), ADA081384 (vol 2)

Application of renewable and nonrenewable energy conversion technologies are forecast for the Navy's ten largest industrial locations and four smaller locations. Data are obtained from an optimization model that determines the least, life-cycle cost energy supply system for an industrial location. Optimal solutions were composed of integrated combinations of energy conversion technologies. Besides being more cost effective than status quo systems fired exclusively on fuel oil, the optimal integrated systems displace a significant percentage of fuel oil.

Energy conversion technologies that participate in the optimal supply systems for large Naval industrial locations include fluidized-bed coal combustion, cogeneration, oil-fired systems, with smaller contributions from refuse derived fuel systems. Oil-fired systems participate only in a peaking capacity wherever coal combustion is permitted. Otherwise, the status quo systems are forecasted to prevail.

Renewable energy conversion systems were not competitive in plant-size configurations at nine of the ten large Naval industrial locations studied, Pearl Harbor being the exception.

CR 80.007

Study of Forced Entry Resistant Doors and Other Barriers for Openings into Secure Structures: Intermediate-Size Doors for Secure Structures, R. Munk, La Jolla, Calif., Science Applications, Inc., Feb 1980, N62474-79-C-5444, ADB048843L

Functions requiring the use of secure facilities are identified and categorized. Door designs constituting the minimum acceptable deterrents to forcible entry for the various categories of secure areas are identified. Recommendations are made regarding the selection of doors for secure facilities. Entry denial, containment of compromising signals, and design of compartmented security facilities are discussed.

CR 80.008

Study of Forced Entry Resistant Doors and Other Barriers for Openings into Secure Structures: Barriers for Secure Structure Penetrations, R. Munk, La Jolla, Calif., Science Applications, Inc., May 1980, N62474-79-C-5444, ADB048844L

The mandated requirements for barriers on windows and vents for the various secure facilities at Naval Shore Establishment installations are identified and compared. The penetration delays provided by the various barrier designs are documented. Recommendations are presented relating to windows and vents in secure structures.

CR 80.009

Study of Forced Entry Resistant Doors and Other Barriers for Openings into Secure Structures: Ordnance Structure Doors, R. Munk, D. Warne, La Jolla, Calif., Science Applications, Inc., May 1980, N62474-79-C-5444, ADB048845L

Doors used on earth covered magazines and other arms, ammunition, and explosives (AA&E) storage structures are described and categorized on the basis of the penetration delay provided when subjected to attacks using various classes of tools. Design features that produce susceptibilities to forcible entry are identified. Factors to be considered in the design of penetration resistant doors are identified.

CR 80.010

Architectural Planning for Crime and Loss Prevention as Applied to Major Hospital Complexes, G. P. Morse et al., Silver Spring, Md., George P. Morse and Associates, Apr 1980, N68305-78-C-0046, ADB047419

Concepts are presented for the reduction of crime related losses in Naval hospitals. Security design techniques which should be introduced prior to construction are discussed and recommendations made. Loss prevention management and security equipment are also discussed.

CR 80.011

Validation of a Freezer Concept for a Desalination Unit, Andover, Mass., Concentration Specialists, Inc., Apr 1980, N68305-78-C-0021, ADA085612

Validation of a smooth-tube, indirect-contact freezer concept was conducted toward inclusion in the design of a modular 20,000-gpd freezing desalinator for use at Naval Advanced Bases. A 500-gpd model freezing desalinator consisting of freezers, crystal growth tank, wash column, melter, and refrigeration system was used to test several flow schemes and freezer configurations having either three or five concentric tube freezer elements. Simplicity in operating mode coupled with low pressure drop (low pumping costs) and high ice production rates (high heat transfer coefficients) was sought.

To provide continuous operation, each of the freezer elements was periodically defrosted while the other elements were refrigerated. Brine was recirculated between the paralleled freezer elements and a crystal growth tank. Ice crystals accumulating at the top of the crystallizer were washed and scraped into an indirect contact melter prior to recombination with the brine stream from the wash column. The combined streams were then returned to the freezer/crystal growth tank recirculation loop.

Flow schemes were utilized with three and five freezer elements paralleled, with refrigerant forced circulation at two velocities, without refrigerant circulation, and with six different brine velocities from 6.0 fps to 18.9 fps. Reynolds' numbers varied from 11,600 to nearly 69,000. Tube side heat transfer coefficients were calculated to be from 784 Btu/hr-ft²°F to 2,360 Btu/hr-ft²°F with temperature differences between 6.8°C and 3.3°C, respectively.

Freezer element icing and plugging were encountered even at the highest Reynolds' numbers attained, i.e., >50,000. Defrosting was found to be required.

Positive results were obtained, in that ice in the form of a soft mass of small crystals similar to that produced in direct contact freezing processes was produced.

Inclusion of smooth-tube freezer design parameters developed in this effort into the preliminary design and sensitivity and economic analyses of a 20,000-gpd containerized freezing desalinator was not performed as originally planned, because it was judged that the fluidized bed freezer alternative would be less prone to freeze-up without significant increase in either pumping costs or system complexity.

CR 80.012

A Study of the Effects of Insulation Gaps on Building Heat Loss, Denver, Colo., Johns-Manville Sales Corp., Apr 1980, N68305-78-C-0056, ADA085222

The scope of the program included testing of a wall panel designated Type I and a second designated Type II. The Type I panel consisted of 2 x 4-inch studs spaced 16 inches on center and insulated with R-11 fiberglass insulation. Tests were conducted in a Guarded Hot Box operated in accordance with ASTM C236-66 (reapproved 1971). Thermal resistance values were determined at mean temperatures of approximately 45°F, 75°F, and 95°F. After these values were determined, insulation areas amounting to 5%, 10%, and 15% of that originally installed were cut out from the mid-height of the test metering area and the tests repeated at each condition. The cut outs were to simulate omissions or errors in installation of the insulation.

The second wall panel, designated Type II, was constructed to simulate 2 x 6-inch studs spaced 24 inches on center and insulated with R-19 fiberglass insulation. The test program duplicated that performed on the R-11 insulated wall in order to determine whether the greater thickness gave similar changes in measured heat flow with increasing insulation void areas.

The test results showed heat flows significantly greater than the percentage of gaps in the insulation. At 45°F mean temperature, the loss in thermal resistance was more than three times the gap percentage up to a 5% gap for 2 x 4-inch stud walls. For 2 x 6-inch stud walls, the loss was more than four times the gap percentage. For a 15% gap at 45°F, the loss increased to 38%.

CR 80.013

Development of a Physical Security Data Management System, 3 vols in 1, J. Caldwell, P. Benner, D. Solomonson, Santa Barbara, Calif., Mission Research Corporation, Nov 1979, DNA001-79-C-0182, ADA084840

Vol 1 presents a review of candidate manual information storage and retrieval systems and the identification of a manual system to suit the needs of CEL and its user community. Systems examined were (1) Edge-Notched Cards, (2) Peek-A-Boo Cards, and (3) Scan Match Cards. Each manual system is analyzed with respect to advantages and disadvantages for CEL needs.

Vol 2 is a user's manual describing the procedures for utilization of the Physical Security Data Management System developed for CEL. The Physical Security Data Management System is an information storage and retrieval system that was designed for in-house use by CEL staff. The manual presents (1) an overview of the Data Management System's hardware and software capabilities, including a description of the systems configuration, (2) user instructions for completion of the input sheet, (3) user instructions for entry of data into the on-line system, (4) description of batch outputs, and (5) user instructions for execution of data file searches in an interactive batch mode.

Vol 3 presents the system outputs of the Physical Security Data Management System. Three separate outputs are presented: the Master List, the Keyword Index, and the Keyword Count. Each individual record consists of a full bibliographical citation, a keyword list, technical annotations relating to physical security, and an abstract.

CR 80.014

Linings for Concrete Fuel Storage Tanks, T. A. Corboy, Temple City, Calif., Advanced Coatings and Chemicals, Jun 1980, N68305-78-C-0006, ADB053480L

A state-of-the-art survey of commercially available coating and lining materials was made. Thirty-five coating systems were applied to clean and/or oil-treated concrete specimens. These specimens, along with lining materials, were immersed in an aromatic-enriched aviation fuel plus a simulated microbial solution, or in a 50:50 mixture of diesel fuel marine and JP-5 plus a simulated microbial solution, for 90 days at 130°F. Four coating systems which had been applied to oil-soaked concrete had greater peel strengths than the present Navy system. Two lining materials directly exposed in the test fuels performed as well as the Pirelli Fix membrane which has a successful record of use by the Navy Fuel Systems Command.

CR 80.015

Development of a Seawater Hydraulic Vane Motor for Diver Tools, Annapolis, Md., Westinghouse Electric Corp., Oceanic Div., Apr 1980, N00123-78-C-1057, ADA084920

A compact efficient hydraulic vane motor capable of operating with pressurized seawater as the working fluid has been successfully developed for use with diver tools. The motor occupies a volume of 23 in.³ and weighs less than 5 pounds. With 1,000-psi seawater at 6-gpm flow rates, the motor delivered 3.3 hp at 1,585 rpm with 80% overall efficiency. The motor operated for 50 hours without component failure. Results of the design and development effort are presented.

CR 80.016

Cargo Fire Hazards and Hazard Control for the Offshore Bulk Fuel System (OBFS), Norman, Okla., Energy Analysts, Inc., Jun 1980, N68305-79-C-0021, ADA087282

This study evaluates potential cargo fuel spills, spill fires, and equipment available to mitigate fuel spill hazards at an offshore bulk fuel supply installation. Potential cargo spill sources, probabilities, and volumes are calculated. Consequences of these spills assuming spill ignition are quantified. Existing fire protection equipment aboard tankers is evaluated to determine the ability of this equipment to control identified spill fire conditions. Where existing firefighting systems are found to be inadequate, additional fire mitigation systems are recommended. Logistic support, manpower, and training needed to maintain the recommended spill control systems are detailed.

CR 80.017

Study of Forced Entry Resistant Doors and Other Barriers for Openings into Secure Structures: Venting Provisions in Earth Covered Magazines, R. Munk, D. Warne, La Jolla, Calif., Science Applications Inc., Jul 1980, N62474-79-C-5444, ADB049261L

Vents constitute the weakest link in the physical security of earth covered magazines for conventional arms, ammunition, and explosives. The question as to whether or not vents were necessary in earth covered magazines was addressed in this study, which entailed a literature review and solicitation of expert opinions on the subject. While not totally conclusive, the results indicate that vents are not necessary for a very large part of the conventional stockpile; the study also reveals that removal of vents actually improves the thermal stability of earth covered magazines.

CR 80.018

Evaluating the SEADYN Model: Mooring Dynamics Experiment Five, D. B. Dillion, Washington, D.C., EG&G Washington Analytical Services Center, Inc., Jul 1980, N00014-78-C-0273, ADA082165

The computer model of ocean cable structures, SEADYN, was used to calculate the anchor-last deployment of the sixth mooring (experiment five) of the Mooring Dynamics Experiment (MDE) conducted in Hawaiian waters in 1976. Comparisons were drawn with measurements of configuration and tension made during the deployment. The SEADYN configuration correlated well with the experimental data when an anchor drag coefficient of 0.78 was used. This value was precalculated to produce the terminal velocity experienced in the MDE.

The MDE provided exceptionally detailed tension data at four points along the mooring. SEADYN reproduces the general features of these measurements with remarkable accuracy.

The SEADYN tension traces include spurious oscillations that mask details of the tension history. These oscillations are believed to result from the omission of material damping in the SEADYN algorithm. Inclusion of hysteresis in the material stress-strain function is expected to remove the oscillations.

Modeling the MDE mooring occurs in two steps. SEADYN is a general cable dynamics computer model using the finite element method. The SEADYN user is also modeler as he reduces the physical mooring to equivalent elements and spherical or cylindrical nodes. This requires considerable technical skills and intuition when, for example, the physical object at the node is a pile of sandbags on a pallet.

CR 80.019

Mooring Dynamics: Computer Models and Experiments at a Sixty Foot Scale, D. B. Dillon, Washington, D.C., EG&G Washington Analytical Services Center, Sep 1980, N00014-78-C-0273, ADA086854

The U.S. Navy Civil Engineering Laboratory is conducting a series of dynamic cable experiments in order to evaluate computer models of cable systems used in the ocean. The results of an experiment using 60-foot cables are compared to two computer simulations in this report. Other experiments at scales of 6 feet and 2,500 feet have been performed.

Three cases from the experiment conducted in the hydroballistics tank of the Naval Surface Weapons Center in 1976 are compared to the SNAPLOAD and SEADYN computer models. Two of the runs simulate the anchor-last deployment of a mooring; the third shows the relaxation of a mooring displaced laterally, then released.

The quality of the experimental data is evaluated by comparing each case to the static, elastic catenary equations at the start and finish of each run. The measured positions of points along the static catenaries are found typically to agree with the catenary calculations within 1% to 2% of the cable length. Tension measured at the fixed end typically agrees with the calculated value within about 12%.

The SEADYN and SNAPLOAD computer models are found to reproduce all the significant motion and forces observed in the experiment. The "handbook" drag coefficients programmed in these models allow the cable motion sometimes to lead the data, sometimes to lag behind. More specific coefficients must be used when the rate of the dynamic motion is critical.

Neither model included elastic hysteresis. The SEADYN program gave somewhat erratic tension values in the mooring line because tension waves were not damped by hysteresis. The SNAPLOAD model eliminated the tension variation through artificial damping.

CR 80.020 - Cancelled

CR 80.021 - Cancelled

CR 80.022

Assessment of the Morison Equation, Houston, Tex., Woodward-Clyde Consultants, Jul 1980, N68305-80-C-0007, ADA088185

A critical assessment of the Morison equation is provided. The Morison equation is used to calculate the loading on offshore structures due to ocean waves. The assessment covers both the original equation and the modifications currently in use by industrial designers. A review of the literature is provided.

It is concluded that the Morison equation provides an adequate design tool provided careful consideration is given to the selection of the fluid kinematic representation and the empirical coefficients. Improvements in the accuracy of the operation can be achieved through research leading to (1) improved descriptions of the sea state, (2) better representations of the water particle velocities and accelerations in combined wave-current flows, (3) improved quantification of the drag and inertia coefficients, and (4) inclusion of the fluid-structural interaction.

CR 80.023

Flue Gas Desulfurization at Navy Bases, Navy Energy Guidance Study, Phase IV, A. I. McCone, San Francisco, Calif., Bechtel National, Inc., Aug 1980, N68305-77-C-0003, ADA089146

A study of the availability, costs, and operating performance of industrial-sized flue gas desulfurization (FGD) systems for coal-fired boilers was performed for the Civil Engineering Laboratory at the Naval Construction Battalion Center at Port Hueneme, CA. A generic overview analysis showed that conventional soda liquor scrubbing offered lowest costs and highest performance when environmental permits can be obtained for disposal of liquid wastes. When wastes must be in solid form, the lowest costs are offered by conventional limestone, lime, and double alkali calcium-based throwaway processes. Several processes still under development were identified as promising but not yet proven. A site specific study identified three industrial-sized FGD installations with inherent availabilities in excess of 98%.

CR 80.024

Cargo Fire Hazards and Hazard Control for the Supplement Fuel Supply Assembly (SFSA), Norman, Okla., Energy Analysts, Inc., Aug 1980, N68305-79-C-0021, ADA089335

This study evaluates potential fuel spills, spill fires, and fuel spill hazards at a supplemental fuel supply installation. Potential fuel spill sources, probabilities, and volumes are calculated. Consequences of these spills assuming spill ignition are quantified. Logistic support, manpower, and training needed to maintain the recommended spill control systems are detailed.

CR 80.025

Testing and Evaluation of Attack Resistance and Hardening Retrofits of Marine Barrack Construction Types to Small Arms Multiple Impact Threat, J. B. Patton, A. B. Wenzel, San Antonio, Tex., Southwest Research Institute, Aug 1980, F41608-79-D A011-0008, ADB051196L

The increased potential of coordinated attacks on various sensitive military areas has generated the requirement to provide an increased measure of protection for selected targets. The threat in this case has been defined as 25 rounds of 7.62 NATO ball ammunition fired from an M-60 machine gun at a range of 25 yards. This attack threat is termed Small Arms Multiple Impact Threat or SAMIT. In order to test the SAMIT against various types of standard construction materials, specimens were constructed of 6-, 8-, and 10-inch reinforced concrete, 8- and 12-inch grout filled concrete blocks and hollow concrete blocks protected by a specially designed steel and plywood layered barrier.

Performance is calculated on a monthly basis. The reports are presented for five (5) geographical regions with content and text format similar, differing only in the appropriate regional factors. This volume gives appropriate designs for Navy installations in East Coast regions with temperate climate.

CR 82.004

Design Calculation Procedure for Passive Solar Houses at Navy Installations in Regions with Warm, Humid Climate, Vol III, M. Lumsdaine, E. Lumsdaine, Las Cruces, NM, New Mexico State University, Oct 1981, N62583-79-MR-585, ADA108384

These reports present design calculation procedures for passive solar houses. A "worksheet" approach is used in that the user may work through an example passive solar design by following the text in the report. Included are tables for heating degree days, solar heat gains, building R factors, orientation factors, roof overhang designs, etc. Performance is calculated on a monthly basis. The reports are presented for five (5) geographical regions with content and text format similar, differing only in the appropriate regional factors. This volume gives appropriate designs for Navy installations in regions with warm, humid climate.

CR 82.005

Design Calculation Procedure for Passive Solar Houses at Navy Installations in the Pacific Northwest, Vol IV, M. Lumsdaine, E. Lumsdaine, Las Cruces, NM, New Mexico State University, Oct 1981, N62583-79-MR-585, ADA108385

These reports present design calculation procedures for passive solar houses. A "worksheet" approach is used in that the user may work through an example passive solar design by following the text in the report. Included are tables for heating degree days, solar heat gains, building R factors, orientation factors, roof overhang designs, etc. Performance is calculated on a monthly basis. The reports are presented for five (5) geographical regions with content and text format similar, differing only in the appropriate regional factors. This volume gives appropriate designs for Navy installations in the Pacific Northwest.

CR 82.006

Design Calculation Procedures for Passive Solar Houses at Navy Installations in Warm California Climates, Vol V, M. Lumsdaine, E. Lumsdaine, Las Cruces, NM, New Mexico State University, Oct 1981, N62583-79-MR-585, ADA108386

These reports present design calculation procedures for passive solar houses. A "worksheet" approach is used in that the user may work through an example passive solar design by following the text in the report. Included are tables for heating degree days, solar heat gains, building R factors, orientation factors, roof overhang designs, etc. Performance is calculated on a monthly basis. The reports are presented for five (5) geographical regions with content and text format similar, differing only in the appropriate regional factors. This volume gives appropriate designs for Navy installations in warm California climates.

CR 82.007

A Passive Solar Retrofit Study for Concrete Block Buildings, W. O. Wray, C. R. Miles, C. E. Kosiewicz, Albuquerque, N.M., Department of Energy, Albuquerque Operations Office, Los Alamos National Laboratory, Jan 1982, N68305-81-MP-10003, ADA110189

A passive solar retrofit study has been conducted for the Navy at the Los Alamos National Laboratory. The purpose of the study was to determine the energy savings obtainable in concrete block buildings from several passive solar heating and conservation strategies. A procedure involving the use of test cell data and computer simulation was employed to assess the merits of six retrofit options. The six strategies selected were chosen on the basis of providing a series of options that will deliver increasing energy savings at the cost of correspondingly increased levels of commitment.

CR 82.008

Morison's Equation and the Wave Forces on Offshore Structures, T. Sarpkaya, Carmel, CA, Dr. Turgut Sarpkaya, Dec 1981, N68305-80-C-0053, ADA137438

The origin and limitations of the Morison-O'Brien-Johnson-Schaff (MOJS) equation, the nature and decomposition of the time-dependent in-line force, the speculative generalizations of the MOJS equation to body shapes other than circular cylinders, to yawed cylinders, to wave-current combination, and to dynamic response of structures are discussed in detail. The background and the limitations of the existing data are reviewed and the data from sinusoidally-oscillating planar flow about smooth and rough circular cylinders are chosen to critically assess the MOJS equation. Six methods are examined to delineate the limitations of the MOJS equation and to devise a new force expression. The final method used (the Fourier analysis of the residues) led to the formulation of a three-term and a Four-term MOJS equation. It is shown through numerous examples that the new MOJS equation reduces the residue significantly for both smooth and rough circular cylinders, particularly in the drag-inertia dominated regime. Finally, the applicability of the new equation to the ocean conditions and the effect of spanwise coherence are discussed and numerous research projects are recommended for consideration. The suggesting is made that further improvement and understanding of the MOJS equation rest not only with carefully conducted laboratory investigations but also with additional ocean tests designed to shed light on several complicating influences such as the spanwise coherence of vortices and vortex interactions.

CR 82.009 - Cancelled

CR 82.010

A Review of Added Mass and Fluid Inertial Forces, C. E. Brennen, Sierra Madre, Calif., C. E. Brennen, Jan 1982, N62583-81-MR-554, ADA110190

This report reviews the existing state of knowledge concerning the evaluation of the forces imposed on a body in a fluid due to acceleration of either the body or the fluid. It concentrates on those fluid inertial forces due to acceleration rather than on the drag/lift forces due to steady motion. The first part of the report presents a survey of the analytical background including the definition of added mass, the structure of the added mass matrix and other effects such as the influence of viscosity, fluid compressibility and the proximity of solid and free surface boundaries. Then the existing data base from experiments and potential flow calculations is reviewed. Approximate empirical methods for bodies of complex geometry are explored in a preliminary way. The possible dramatic effects of the proximity of the ocean bottom are further highlighted. The confused state of affairs regarding the possibly major effects of viscosity in certain regimes of frequency and Reynolds number is discussed. Finally a number of recommendations stemming from ocean engineering problems are put forward.

CR 82.011

Economic Analysis of Airfield Pavement Rehabilitation Alternatives - An Engineering Manual, J. A. Epps, C. V. Wootan, Bryan, Tex., J. A. Epps, Consulting Engineer, Mar 1982, N62583-81-MR-328, ADA112550

The manual describes a method for evaluation of pavement rehabilitation alternatives based on a present worth or present value economic model. Methods for selecting pavement rehabilitation, recycling and maintenance alternatives are presented together with a method for determining thickness requirements for overlay on airfield pavement facilities.

Guidelines are presented to allow the engineer to select an appropriate discount rate, analysis period and salvage values for use in the life cycle cost calculations. Prices

and costs of pavement rehabilitation and recycling maintenance techniques are given and are suggested for use if costs of these operations are not available from historical records. Cost updating procedures are also defined.

Two example problems are included in the manual to illustrate the techniques of present worth life cycle costing. (Also published as DOT/FAA/RD-81/78.)

CR 82.012

A Newton-Lanczos Method for Solution of Nonlinear Finite Element Equations, B. Nour-Omid, Berkeley, Calif., Department of Civil Engineering, University of California, Feb 1982, N62583-82-MR-419, ADA112043

The finite element method reduces nonlinear continuum problems to nonlinear discrete problems which take the form of systems of nonlinear algebraic equations. Attention is devoted to procedures which may be employed to solve the resulting nonlinear algebraic systems. The general class of continuum problems of interest include both material and geometric nonlinearities.

Newton's method, modified Newton methods, and quasi-Newton methods are reviewed. However, the technique which has been given focus is the Newton-Lanczos method which is a member of the class of solution methods that employ an iterative, linear equation solver in an inner loop within Newton's method.

The Newton-Lanczos algorithm is shown to not only require fewer factorization steps than either the quasi-Newton or modified Newton methods but also possesses more robust convergence characteristics when dealing with nearly singular Jacobian matrices and indefinite systems.

CR 82.013

A Verification Study for the Bounding Surface Plasticity Model for Cohesive Soils, L. R. Herrmann et al., Davis, Calif., Department of Civil Engineering, University of California, Mar 1982, N62583-81-MR-320, ADA113673

Results of drained and undrained, triaxial compression and extension, and thick-walled cylinder laboratory tests are given for a laboratory prepared kaolin soil. For the soil in question, a portion of the data is used to calibrate a "bounding surface plasticity model" for cohesive soils. The model is used to analyze the remaining tests and the results are compared to the measured values with good agreement.

CR 82.014

Test Cases for SEADYN Verification, P. E. Nordstrom, H. Ottsen, Oxnard, Calif., Western Instruments Corp., Apr 1982, N68305-80-C-0004, ADA114978

This report includes actual input decks and associated outputs for demonstration of the SEADYN cable dynamics computer model. The input problems are intended to allow for the verification of the model if it is transferred for operation on non-CDC computers.

CR 82.015

Validation of Computer Models of Cable System Dynamics, D. B. Dillon, Rockville, Md., EG&G Washington Analytical Services Ctr., Apr 1982, N68305-80-C-0020, ADA114957

Comparisons are made between measurements taken during four series of dynamic cable experiments and simulations of the experimental events using two computer models, SEADYN and SNAPLOAD, under the sponsorship of the Naval Civil Engineering Laboratory. Three of the experiments were conducted in laboratory water tanks using an elastically stiff nylon cord and a soft silicon rubber cable.

The first experiment used cables 6 feet long. Five distinct geometries were measured, including simulation of the anchor-last deployment of a single mooring leg, the relaxation of a subsurface mooring from a displaced condition, and the response of a load suspended along a cable fixed at one end and moved around a circle at the other.

The deployment and relaxation simulations were repeated in the second experimental series, using cables 60 feet long. The tension was measured during the third series while a weight suspended from the nylon or rubber cable was payed out or reeled in from a small winch. The winch base could be oscillated vertically to simulate wave action.

The fourth experiment was the deployment of a full-size instrumented subsurface mooring in 2,500 feet of water off Kauai, Hawaii as part of the joint Mooring Dynamics Experiment (MDE) conducted in late 1976.

SEADYN is a general three-dimensional model of the dynamic response of cable networks to environmental changes using a nonlinear finite element technique in the time domain. SNAPLOAD uses the lumped parameter method to model the dynamics of serially connected cables suspended in a vertical plane. Both models are shown to reproduce all the significant motions and forces in the modeled events, but tensions are introduced in both models by the inaccurate hydrodynamic drag coefficients that they use.

Material damping caused by elastic hysteresis in the cable material is found to play a significant part in smoothing the computation of cable tension, even though it has little overt relation to the overall event. Small amounts of material damping are sufficient to prevent undesirable oscillations between model nodes; larger values enable SEADYN to accurately model the forced oscillation of the anchor as the length of the suspension cable was varied through resonance.

The laboratory experiments were restricted to serially connected cables and special buoys or anchors suspended in a vertical plane in still water in order to make the data useful for comparing simple computer models as well as stances by comparing equilibrium and steady-state conditions to results obtained from elementary theory. The data from all four experiments are available for evaluating other models.

CR 82.016

SEAPLOT: A Graphics Post-Processor for the SEADYN Program, R. L. Webster, Brigham City, Utah, Dr. R. L. Webster, Consulting Engineer, Apr 1982, N62474-81-C-9391, ADA114961

This report describes the computer program named SEAPLOT, which is a graphics post-processor to the general purpose cable dynamics computer model named SEADYN. The program is written with CALCOMP compatibility for use with the CDC-Cybernet program UNIPLOT.

CR 82.017

A Compendium of Tension Member Properties for Input to Cable Structure Analysis Programs, J. F. Wadsworth, Oxnard, Calif., Western Instruments Corp., Apr 1982, N68305-80-C-0004, ADA115019

This report is a collection and condensation of cable properties used in computer simulations of cable dynamics problems. Data were taken from a variety of sources, and include weight per foot (in air and immersed), elastic modulus, breaking strength, cross-sectional area, and drag and added mass coefficients. Cable types include chain, wire rope, synthetic and electromechanical.

CR 82.018

SEADYN: Programmer's Reference Manual, R. L. Webster, Brigham City, Utah, Dr. R. L. Webster, Consulting Engineer, Apr 1982, N62474-81-C-9391, ADA115011

The internal workings of the SEADYN cable, truss, and mooring program are detailed. Descriptions are given of the overall program structure and logic. Storage features, such as COMMON, data files, and variable dimensions are discussed. Descriptions are given for each of the subroutines and the major variables used. The information provided is intended to augment the general description of the program provided in the User's Manual and Mathematical

Models and provide a programmer with assistance in understanding the internal workings of the SEADYN programming. Instructions for converting the program to various machines and for modifying the program are also provided.

CR 82.019

SEADYN Mathematical Models, R. L. Webster, Brigham City, Utah, Dr. R. L. Webster, Consulting Engineer, Apr 1982, N62474-81-C-9391, ADA114994

This manual presents the theoretical background material for the SEADYN cable, truss, and mooring program. SEADYN uses the finite element method for modeling the cables, trusses, and mooring lines. Two elements are treated: the one-dimensional Simplex (truss) element and a bottom-limited catenary. Lumped parameter concepts are used in treating buoys, anchors, floats, etc. Rigid body models are used for ships, platforms, mooring buoys, etc. A cartesian 3-D geometric space is used throughout. Besides describing the element and body equations for submerged responses with large displacements, this manual discusses the various static and dynamic solution methods employed.

CR 82.020

A Viscoplastic Plane Frame Beam-Column Element for Program FEAP, J. H. Slater, R. L. Taylor, Berkeley, Calif., University of California, May 1982, N62583-81-MR-439, ADA114461

A two-dimensional viscoplastic beam element was developed for the computer program FEAP. The element is suitable for small displacements or moderate rotations with negligible shear. The element is formulated in moment-thrust space which will improve modeling of concrete beams. The viscoplastic formulation provides time dependent effects such as the influence of the strain rate upon the yield strength.

CR 82.021

A Viscoplastic Algorithm for CAP75, M. G. Katona, M. A. Mulert, Notre Dame, Ind., Department of Civil Engineering, University of Notre Dame, May 1982, N68305-80-C-0031, ADA114460

A viscoplastic formulation based on Perzyna's elastic/viscoplastic theory is developed for geological materials using the Sandler and Rubin CAP75 plasticity model. The numerical strategy employs a one parameter Crank-Nicolson time integration scheme which provides options for explicit and implicit algorithms. A computer program called VPDRVR exercises these algorithms for arbitrary states of stress or strain.

CR 82.022

A Systematic Procedure for Calculating the Average Illuminance on a Work Plane from Skylights Located in a Pitched Roof, J. B. Murdoch, J. E. Nettleton, Durham, N.H., Department of Electrical Engineering, University of New Hampshire, May 1982, N62583-81-MR-307, ADA115523

A systematic design procedure has been developed to calculate the average horizontal illuminance upon a work plane due to skylights in a pitched roof. The calculation procedure allows for pitched roofs with slopes up to 30 degrees from horizontal, and for both clear and overcast sky conditions. The procedure is divided into two basic steps: (1) the calculation of total external daylight illuminance upon the sloped skylight surface, and (2) the calculation of average horizontal illuminances upon an interior workplane due to the sloped skylights. Worksheets are used to systematically step through the procedure. All necessary tables and equations are included.

CR 82.023 - Cancelled

CR 82.024 - Cancelled

CR 82.025

Development of a Seawater Hydraulic Tool System, R. Graham, G. G. Hastings, Annapolis, Md., Westinghouse Electric Corp., Oceanic Division, May 1982, N00123-80-C-1271, ADA114960

The Naval Civil Engineering Laboratory is developing a diver-operated hydraulic tool system that uses seawater as the working fluid. The program was initiated in 1976 with the subsequent development of an experimental balanced vane by 1980. Late in 1980 a contract was awarded to improve the performance of the experimental vane motor and make it reversible, to couple the motor to a rotary impact mechanism with appropriate control to form a diver-operated impact wrench, and to develop a diesel-operated portable power supply for operating the tool. This report describes the successful development of this experimental seawater hydraulic tool system.

CR 82.026

Appendix to Development of a Seawater Hydraulic Tool System, R. Graham, G. G. Hastings, Annapolis, Md., Westinghouse Electric Corporation, Oceanic Division, May 1982, N00123-80-C-1272, ADB063681L

The Naval Civil Engineering Laboratory is developing a diver-operated tool system that uses seawater as the working fluid. In the fall of 1978, work began on the development of an experimental vane motor capable of powering diver-held tools. Material requirements for the vane motor components were investigated in detail, and an engineering model of the motor was designed and fabricated using the most promising materials. The best results were obtained by using Torlon 4275, a high-strength thermoplastic, for the vanes, side plates, and bearings, and Inconel 625, a high-nickel-based alloy, for the housing and rotor. Based on the results of engineering development, an experimental vane motor was fabricated and tested in the laboratory. The motor, with a volume of about 25 in.³, weighs 5 pounds, and produces 3.3 hp at 1,600 rpm with 80% overall efficiency when supplied with 7 gpm of seawater at 1,000 psi. More than 60 hours of full-power operation have been achieved. The results to date of the development and testing are presented in this report.

CR 82.027

Energy Monitoring and Control Systems Operator Training - Recommended Qualifications, Staffing, Job Description, and Training Requirements for EMCS Operators, C. Cornelius, B. Wise, Atlanta, Ga., Newcomb & Boyd, Consulting Engineers, Jun 1982, N62474-81-C-9405, ADA116835

This report includes a review of: (1) operator training provided by EMCS contractors, (2) the requirements for training by the Tri-Service Specifications, and (3) the present operation of several functioning EMCS installations.

From the information gathered, recommendations were made in regard to qualifications, staffing, job description, and training requirements for a competent EMCS operator.

It is recommended that training be given in four phases: (1) Shop Rotation, (2) EMCS Operator Training Course, (3) Vendor Training, and (4) On-the-Job Training.

Detailed objectives, course outline, and manual outline for the proposed EMCS Operator Training Course are provided in Section 3 of this report.

CR 82.028

Controlling Energy Consumption in Single Buildings, J. Rees, Atlanta, Ga., Newcomb & Boyd, Consulting Engineers, Jul 1982, N62583-81-MR-593, ADA118898

This report contains guidelines for using microprocessor-based equipment to control energy in buildings. Energy conservation control strategies are discussed and simplified energy savings calculations explained. The results of a survey of currently available equipment suitable for use as energy controllers are included as well as selection guidance for which class of equipment will provide the needed features.

CR 82.029

Reliability, Maintainability, Availability; Thermal Efficiency; and Cost Effectiveness Evaluation of Naval Station Mayport Heat Recovery Incinerator, Oxnard, Calif., VSE Corporation, Jul 1982, N00123-82-D-0149, ADA118523

This report addresses the long-term evaluation of the Mayport heat recovery incinerator program. Operational data were collected from 29 Sep 1980 to 28 Sep 1981 and then analyzed for reliability, availability, maintainability, thermal efficiency, and operating cost.

CR 82.030

Standardized EMCS Energy Savings Calculations, C. Cornelius, Atlanta, Ga., Newcomb & Boyd, Consulting Engineers, Sep 1982, N62474-81-C-9382, ADA123383

This report describes standardized methods for determining energy savings obtainable from EMCS applications programs using manual and computerized algorithms. The methods will provide reasonable approximations of savings but not detailed energy analyses of building operations.

CR 32.031

Conceptual Design of Navy Floating Pier, San Francisco, Calif., T. Y. Lin International, Sep 1982, N62474-81-C-9404, ADA121865

An innovative concept for a floating pier to serve Navy surface combatants has been developed. The prestressed concrete pier is 1,200 feet long and 75 feet wide and offers a number of advantages over conventional pile supported piers. These advantages include:

- (a) A constant deck elevation with respect to berthed ships which results in decreased need to tend utility and mooring lines.
- (b) A full interior deck which doubles the available length of ship-to-pier interface.
- (c) A clear top deck with all utility lines located under the deck and accessible from the lower interior deck.
- (d) A modern cell-type fender system.

In addition, the floating pier has significant merit when used to replace an existing deteriorated pier. The floating pier can be constructed in modules offsite while the old pier is demolished, the modules then floated into position, and the construction completed at the original pier site. Using the floating pier approach, the Navy would have an operational pier at least 12 months sooner than would be the case with a fixed pier. The initial cost for a floating pier has been estimated to be about 14% higher than that for a comparable pile supported pier.

CR 82.032

Reliability Engineering Analysis - Small-Scale Heat Recovery Incinerator Installations, Oxnard, Calif., VSE Corporation, Sep 1982, N00123-82-C-0149, ADA122408

This report addresses the reliability prediction conducted on the two Navy owned and operated heat recovery incinerator systems. The prediction was based on a part counts method and the original designs of the two HRI systems. Based on this prediction, long term data collected at Mayport and Jacksonville HRI systems and mission requirements, testing procedures for HRI systems have been identified. Included in this report is a failure modes and effects analysis conducted at these HRIs.

CR 82.033

Safety and Human Factors Engineering Analysis - Heat Recovery Incinerator Installation, Oxnard, Calif., VSE Corporation, Sep 1982, N00123-82-C-0149, ADA122408

This report contains a safety and human factors analysis of the Navy's heat recovery incinerator (HRI) systems. These requirements were based on current military standards and an evaluation of the HRI's at NAS, Jacksonville

and NS, Mayport, FL. The data collected were used to develop preliminary design criteria for future HRIs.

The safety analysis lists specific areas where problems can occur and what should be done to prevent injury to plant personnel. The human factors design criteria section lists steps that can be taken to improve personnel and plant operating efficiency. Finally, specific problems that are occurring at NAS, Jacksonville and NS, Mayport are given.

CR 82.034

Energy Storage Criteria Handbook, J. R. Hull, R. L. Cole, A. B. Hull, Argonne, Ill., Argonne National Laboratory, Oct 1982, N68305-81-MP-10027, ADA125180

The purpose of this handbook is to provide information and criteria necessary for the selection and sizing of energy storage technologies for use at U.S. Naval facilities. The handbook gives Naval base personnel procedures and information to select the most viable energy storage options to provide the space conditioning (heating and cooling) and domestic hot water needs of their facility. The handbook may also be used by contractors, installers, designers, engineers, architects, and manufacturers who intend to enter the energy storage business.

The handbook is organized into three major sections: a general section, a technical section, and an example section. While a technical background is assumed for the latter two sections, the general section is simply written and can serve as an introduction to the field of energy storage. The technical section examines the following energy storage technologies: sensible heat storage, latent heat storage, cold storage, thermochemical storage, mechanical storage, pumped hydro storage, and electrochemical storage. The example section is limited to thermal storage and includes examples for: water tank storage, rockbed storage, latent heat storage, and cold water storage.

CR 83.001

Energy Monitoring and Control Systems Inspection Guidelines, J. Cosiol, F. Bomar, R. Bamford, Philadelphia, Pa., Kling-Lindquist, Inc., Engineers, Dec 1982, N62474-81-C-9379, ADA129732

This report presents guidelines which can assist the inspector in conducting an inspection of energy monitoring and control system (EMCS) hardware and software during the construction and testing phases of the EMCS project. These guidelines present construction management considerations, describe the inspection sequence for a generic EMCS during the construction period, and provide an overview of the tests to be conducted in the factory and on-site.

CR 33.002

Energy Monitoring and Control Systems - Factory Test Procedures, J. Cosiol, F. Bomar, Philadelphia, Pa., Kling-Lindquist, Inc., Engineers, Dec 1982, N62474-81-C-9379, ADA124047

This report presents generic factory test procedures for EMCS. These test procedures are designed to demonstrate in the factory the technical, operational, and performance of an EMCS procured using the tri-service EMCS guide specifications.

CR 83.003

Energy Monitoring and Control Systems - Performance Verification and Endurance Test Procedures, J. Cosiol, F. Bomar, Philadelphia, Pa., Kling-Lindquist, Inc., Engineers, Dec 1982, N62474-81-C-9379, ADA123821

This report presents generic tests designed to assist in assuring that EMCS installed using the tri-service EMCS guide specifications meet the specified technical, operational, and performance requirements.

CR 83.004

Vortex Shedding from Cables and Structures in a Shear Flow: State-of-the-Art, O. M. Griffin, Washington, D.C., Marine Technology Division, Naval Research Laboratory, Nov 1982, N68305-82-WR-20092, ADA121864

This report examines the general problem of the flow about bluff bodies in a shear flow in light of the present state of knowledge for these flows, and relates existing studies to the vortex-excited oscillations of slender, flexible structures in air and in water. Experiments with circular cylinders are emphasized, although reference also is made to experiments conducted with cylinders of other cross-sections (D-section cylinders, rectangular cylinders, etc.). Some recent experiments with flexible cables in a shear flow are discussed to the extent possible.

Many of the studies conducted thus far have been limited to cylinders with small aspect ratios or length/diameter less than $L/D = 15$ to 20 . The cellular structure of the vortex shedding is influenced strongly by the end conditions for cylinders with these relatively small values of L/D and so it is important to conduct experiments with cylinders of sufficient length to minimize the effects of the end boundaries. The results obtained from experiments such as these are of particular importance in the design of long, flexible marine structures and cable arrays.

The effects of incident shear on the cross flow response of lightly damped structures in air and in water should be investigated further. The experiments conducted thus far have demonstrated that cylindrical structures undergo large-amplitude unsteady motions in shear flows when the critical incident flow velocity is exceeded and the damping is sufficiently small. However, more definitive bounds for and details of this fluid-structure interaction are required for applications in both wind engineering design of buildings and structures and ocean engineering design of structures and cable systems.

CR 83.005

Handbook of Thermal Insulation Applications, D. E. Croy, D. A. Dougherty, Denver, Colo., EMC Engineers, Inc., Jan 1983, N62474-81-C-9395, ADA125264

This document is intended to provide current design information on insulation materials and assemblies for building envelopes and mechanical systems.

Compiled data include thermophysical properties of commonly used generic thermal insulating materials and their application in wall, floor and roof assemblies, door and window assemblies, and in mechanical piping, tanks, vessels, equipment, and air duct installations.

Listings of insulation materials are sorted by both manufacturer's trade names and by product descriptions. Plates showing typical new and retrofit installation details for these materials in building assemblies and mechanical systems are provided.

An understanding of how insulation conserves energy and fundamentals of heat transfer are provided. Information on computer programs for heat transmission, mass and thermal capacity calculations is included. Examples are given that show how the document can be used to estimate energy savings attainable with thermal insulation in building wall and piping assemblies. Methods for optimizing insulation thicknesses are provided in a section on insulation economics.

CR 83.006

Problem Definition Study of Requirements for Vapor Retarders in the Building Envelope, P. R. Achenbach, H. R. Trechsel, Germantown, Md., H. R. Trechsel Associates, Nov 1982, N62583-81-MR-671, ADA122203

This document provides a state-of-the-art review and evaluation of current design criteria for vapor retarders. It also suggests general criteria for vapor and air leakage control in Navy building envelopes and recommends specific

RDT&E to resolve conflicting criteria, develop remedial measures for existing buildings and prepare guidelines for new construction to prevent the types of moisture and fungus problems currently being experienced, particularly in tropical and subtropical environments.

CR 83.007

Innovative Design Concepts - Piers for Surface Combatants (Destroyers, Frigates and Light Cruisers), Sidney M. Johnson and Assoc., Union, N.J., Sidney M. Johnson and Assoc., Jan 1983, N62474-81-C-9396, ADB070971L

Navy piers constructed to support the Fleet since World War II no longer are capable of responding adequately to today's modern Naval ships with their sophisticated systems and increased demands for service.

Deficiencies in current pier designs were identified and the following has been concluded about the design of future piers: (a) Piers should be operationally adaptive and designed to provide an excess (over immediate requirements) of space, deck load capacity, and utility service. (b) Contact footage between pier and ship is more important than total deck area. This could be achieved with a multiple deck pier or with a pier that features access to both sides of a berthed ship. (c) Pier deck elevation could be raised 4 to 5 feet without any attendant loss of service function. A raised deck would allow a full depth utility gallery beneath the deck. (d) Maintenance and damage prone timber fender systems should be replaced by more modern systems constructed of concrete, steel, and elastomer components.

A number of concepts for pile supported and filled type construction piers are presented which illustrate application of the investigation conclusions.

CR 83.008

EMCS Cost Estimating Data, C. Cornelius, Atlanta, Ga., Newcomb & Boyd, Consulting Engineers, Jan 1983, N62474-81-C-9382, ADA123673

This report provides current cost estimating data for large, medium, and small EMCS. The report includes unloaded material and labor costs obtained from equipment manufacturers of system components. It also suggests factors to be used in determining total costs and provides samples of point cost deviations.

CR 83.009

CEL-1 Lighting Computer Program - Programmer's Guide, W. E. Brackett, New York, N.Y., The F + K Group, Jan 1983, N68305-80-C-0012, ADA124215

The basic algorithms and program file structure of the CEL-1 (Conservation of Electric Lighting, Version 1.0) lighting computer program are documented. The CEL-1 computer program aids the illumination engineer in designing energy efficient interior lighting systems. Lighting metrics which may be calculated include illuminance, luminance, equivalent sphere illumination, and visual comfort probability. Energy profiles resulting from lighting controls which respond to daylight can be evaluated using CEL-1. This programmer's guide is divided into seven sections: (1) Programs Structure, (2) Basic Techniques, (3) Main Program Descriptions, (4) Subprogram Descriptions, (5) Logical Unit Assignments, (6) Compiling the Programs, and (7) Source and Auxiliary Files.

CR 83.010

Numerical Implementation of the Cohesive Soil Bounding Surface Plasticity Model, Vol. 1, L. R. Herrmann et al., Davis, Calif., University of California, Feb 1983, N62474-82-C-8276, ADA124866

The results of a study of various numerical means for implementing the bounding surface plasticity model for cohesive soils are presented. A comparison is made of the

computational efficiency, robustness, and ease of implementation of the completing methods. The comparisons are made on the basis of solutions to three representative geotechnical engineering problems.

A very brief description of a computer aided automated calibration procedure is given along with instructions for using the resulting computer code. An example calibration is reported for a particular cohesive soil.

CR 83.011

User's Manual for MODCAL - Bounding Surface Soil Plasticity Model Calibration and Prediction Code, Vol. 11, J. S. DeNatale, L. R. Herrmann, Y. F. Dafalias, Davis, Calif., Department of Civil Engineering, University of California, Feb 1983, N62474-82-C-8276, ADA124867

In recent years, much research has been directed towards the development of sophisticated constitutive models which can more realistically account for the diverse stress-strain phenomena exhibited by soils and other earth materials. Most of these models employ parameters whose optimal values can only be established through a trial-and-error curve fitting process, with the objective being to obtain the best overall fit to a given experimental relation or set of observed responses. As a result, the accuracy and efficiency of this model calibration process can be highly dependent on both the subjectivity of the user as well as his familiarity and expertise with the particular constitutive formulation. In order to minimize this user dependence, and thereby significantly reduce the complexity of the model calibration process, a computer aided automated procedure has been developed and tested. The computer code employs a Quasi-Newton optimization strategy to locate that set of parameter values which minimizes the discrepancy between the model predictions and the experimental observations included in the calibration data base. Through application to a number of real soils, the automated procedure has been found to be an efficient, reliable and economic means of accomplishing model calibration. Although the code was developed specifically for use with the Bounding Surface plasticity model, it can readily be adapted to other constitutive formulations. Since the code greatly reduces the dependence of calibration success on user expertise, it significantly increases the accessibility and usefulness of sophisticated material models to the general engineering community.

CR 83.012

Boiler Control Survey Report, Irvine, Calif., Ultrasystems, Inc., Feb 1983, N62474-81-C-9388, ADA124994

Report presents results of survey of types of boiler control systems in use in Naval shore facilities.

CR 83.013

Boiler Control Systems Theory of Operation Manual, Irvine, Calif., Ultrasystems, Inc., Feb 1983, N62474-81-C-9388, ADA124868

Report reviews the fundamentals of combustion, safety, and feedwater control systems commonly used on small industrial boilers. Report is educational material for boiler operation and maintenance personnel.

CR 83.014

Boiler Control Systems Oxygen Trim Systems Manual, Irvine, Calif., Ultrasystems, Inc., Feb 1983, N62474-81-C-9388, ADA125159

Report is educational material for boiler operating personnel describing the principles which govern excess-air trim systems and their application to industrial boiler combustion control for the purpose of increasing the boiler's efficiency.

CR 83.015

Direct Digital Boiler Control Systems for the Navy Small Boiler Requirement, Irvine, Calif., Ultrasystems, Inc., Feb 1983, N62474-81-C-9388, ADA125160

Fifteen manufacturers of direct digital boiler control systems were surveyed. The results are presented in a comparison chart supplemented by narrative discussion. Recommendations for incremental application of these systems to the Navy's small boiler control requirement are presented, as well as estimated cost projections for single and multiple boiler control application.

CR 83.016

Preliminary Operating Assessment Advanced Heat Recovery Incinerator Site Two: Basic Environmental Engr., Inc., R. L. Streeter, G. J. Matzuk, Pottstown, Pa., Sanders & Thomas, Inc., Consulting Engineers, Mar 1983, N68305-80-C-0060, ADA125157

This brief evaluation of a Basic Environmental Engineering, Inc. heat recovery incinerator (HRI) documents and describes several innovative features not found in most other modular HRIs this small. These features and subsystems include: waterwall primary combustion chamber, pulsed hearths for burning material transport, multiple zone control of secondary combustion, ash removal subsystem with no moving linkages under water, and partial integrated digital controls. The system start-up experience, also well documented, may be considered typical or better than average for many modular HRIs in the last few years.

For further information, contact P. L. Stone, A/V 360-5925 or FTS 799-5925/5974 or commercial (805) 982-5925/5974.

CR 83.017

Survey of Small Scale Heat Recovery Incinerators, J. K. Tuck, D. J. Lafrenz, Richmond, Calif., Cal Recovery Systems, Inc., Feb 1983, N62583-82-MR-460, ADA125543

Solid waste heat incinerator (HRI) facilities within the United States, which were capable of 24-hr/day operation, had operated for about a year, and had combustors of between 0.75-3.00 ton/hr capacity, were identified to permit selection of best facilities for field visits. Thirteen manufacturers of HRI were identified.

CR 83.018

Air Leakage Measurements in Navy Family Housing Units at Norfolk, Virginia, P. L. Lagus, La Jolla, Calif., S-CUBED, Apr 1983, N68305-79-C-00344, ADA128562

A series of tests was conducted in 24 Navy family housing units to determine the effectiveness of three retrofit techniques in reducing air leakage. Effectiveness was determined by fan pressurization/depressurization tests before and after the retrofits were installed. In two other housing units, other types of retrofits were simulated by using tape and plastic sheeting at suspected leakage points.

This report covers the measurement techniques used, air leakage data collected, and conclusions and recommendations based on the tests.

CR 83.019

Acoustical Benefits Resulting From Insulation and Air Leakage Control in Family Housing Units, J. D. Verschoor, J. D. Haines, Denver, Colo., Manville Service Corp., R&D Center, Jul 1983, N62583-82-MT-033, ADA131879

In an investigation sponsored by the Navy Family Housing Office, a series of tests was conducted to determine the improvement in acoustical sound transmission loss resulting from housing envelope energy conservation retrofits involving increasing the insulation level and/or controlling the air leakage. The data generated will be utilized in selecting energy conservation measures with maximum acoustical benefits, for retrofitting family housing units near aircraft operations, where excessive noise has been a problem.

Three wall and two roof/ceiling test structures were constructed to be representative of those in present Navy Family Housing Units. The sound transmission loss and air leakage rate (resulting from an induced pressure differential) were determined for each basic construction. Subsequently, various retrofit measures were performed, designed to improve sound transmission loss, thermal performance and/or air leakage control. Following the retrofit, the improvement in air leakage rate and sound transmission loss were again determined. The thermal conductances of the base constructions and that of the retrofits were calculated. For those constructions where present data were felt to be inadequate, guarded hot box tests were conducted to determine the thermal conductance of the construction.

Data are presented on the sound transmission loss, overall sound transmission class (STC), air leakage rate, and thermal conductance of the constructions tested. Typical (1982) retrofit costs are also estimated, so that benefit-to-cost performance can be analyzed.

CR 83.020

An Investigation of the Effects of Grain Crushing on the Engineering Analysis of Calcareous Sediments, Long Beach, Calif., Ertec Western, Inc., Mar 1983, N62474-82-C-8269, ADA126860

Sixteen specially prepared laboratory soil specimens were subjected to model pile driving to induce grain crushing about the pile perimeter and study the effects grain crushing has on the engineering analysis of calcareous sediments. Each specimen constituted a particular material, level of degree of cementation, and density. The parameters measured for each test were the pile driving resistance, pile pullout resistance, and grain size analysis curves determined before and after pile driving for areas next to and remote to the pile surface. The results of this experiment revealed that crushability depends on the inter-related effects of grain harness, pile penetration resistance to driving, cement content, and soil density. A significant finding showed that the pile driving resistance is not a rational parameter in assessing pullout capacity for piles in calcareous sands.

CR 83.021

EMCS Operator Training Manual, C. Cornelius, B. Wise, S. Bruning, Atlanta, Ga., Newcomb & Boyd, Consulting Engineers, Apr 1983, N62474-81-C-9405, ADA128087

This manual is a training aide to accompany the EMCS Operator Training Course. It is also intended as a working reference for the EMCS operator. The manual discusses the basics of HVAC system operation covering most systems which would be connected to an EMCS. It includes a generic description of the EMCS hardware, explanations of the energy savings strategies of the EMCS applications software and discussions of EMCS alarm analysis and system operation.

CR 83.022

Boiler Combustion Control Maintenance Manual, Irvine, Calif., Ultrasystems, Inc., Mar 1983, N62474-81-C-9388, ADA127249

Report provides guidance to boiler operating personnel on adjusting and maintaining combustion controls of small industrial boilers.

CR 83.023

Tension Cutoff and Parameter Identification for the Viscoplastic CAP Model, M. G. Katona, Notre Dame, Ind., Department of Civil Engineering, University of Notre Dame, Apr 1983, N62474-82-C-8270, ADA128304

A viscoplastic formulation based on Perzyna's elastic/viscoplastic theory and the Sandler and Rubin CAP75 plasticity model was extended to include a tension cutoff

mechanism. The mechanism employs separate fluidity parameters for the dilatational and deviatoric stress releases. A parameter identification study was performed to determine the sensitivity of the parameters and means of determining them from experimental data.

CR 83.024

Concepts for Combat Support, Combat Service Support, and POL Requirements and Distribution Concepts to a Mechanized Combined Arms Task Force in the Mid- and Long-Range Time Frames, McLean, Va., Potomac General Research Group, Apr 1983, N62474-81-C-9397, ADA128407

This report presents the results of an investigation of the expected operations and employment of a Marine Corps Mechanized Combined Arms Task Force (MCATF), both in the mid-range (1983-1992) and in the long-range (1993-2000), and formulates concepts for the conduct of combat support (CS) and combat service support (CSS) compatible with MCATF characteristics. The MCATF was selected for investigation because it was expected to severely exercise CS and CSS elements.

The conclusions and recommendations of the report indicate that there is a feasible set of tactical, CS, and CSS concepts suitable for operation of MCATFs on varied depth of penetration missions in the long-range time frame. The CS and CSS concepts described require doctrinal, organizational, and equipment changes and improvements that are justified by the tactical flexibility and capability that they allow MCATFs to display in executing their missions.

Part III of the main body of the report presents an overview of the POL (Class III and IIIA) requirements and distribution concepts, the details of which are contained in Annex B of the report. The most significant aspect of this analysis is the validity of using SIXCON fuel modules as a primary container system for helicopter lift of fuel and subsequent distribution within the MCATF. Also of interest is the finding that AAFS, TAFS, and HERS type systems remain essential to overall capabilities.

CR 83.025

Survey of Foreign Systems for Incineration and Energy Recovery, R. Frounfelker, B. A. Hausfeld, Xenia, Ohio, Systech Corporation, Apr 1983, N62583-82-MT-150, ADA127461

Solid waste heat recovery incinerator (HRI) facilities outside the United States, which were capable of 24-hour a day operation, had operated for about a year, and had combustors of between 0.75 and 3.0 ton/hr capacity, were identified to permit selection of best facilities for field visits. Of the 40 vendors identified, 21 responses were received. Eleven of the vendors had facilities that fit the above criteria. Facilities of six vendors were selected for field visits.

CR 83.026 - Cancelled

CR 83.027

Solution Techniques in Finite Element Analysis, B. Nour-Omid, C. Rodrigues, R. L. Taylor, Berkeley, Calif., University of California, Department of Civil Engineering, May 1983, N62474-82-C-8277, ADA128617

A desirable advantage of iterative methods is that they provide means of controlling the accuracy of the solution. In particular, when low levels of accuracy are required this can result in faster algorithms than the direct methods. The use of the conjugate gradient algorithm to solve the linearized system of equations is considered. A preconditioning matrix based on a splitting method is constructed. The outcome is an algorithm which results in substantial reduction in storage over direct methods. The above method is compared with its rivals on several quite different problems in structural mechanics and favorable results were obtained.

CR 83.028

Preliminary Operating Assessment Advanced Heat Recovery Incinerator (Hk1) Site One: O'Connor Combustor Corporation, H. I. Hollander, G. J. Matzuk, G. Romine, Pottstown, Pa., Sanders & Thomas, Inc., Consulting Engineers, Jul 1983, N68305-80-C-0060, ADA131254

This brief evaluation of the first O'Connor (rotary waterwell) Combustor plant built in the U.S.A. describes design features and considerations as well as initial operating advantages and difficulties. A brief general description of a co-located, proprietary fuel preparation system is included. The major conclusion presented alludes to a waste fuel availability requirement approaching 60 tons per day (tpd) for probable cost effectiveness of this technology.

For further information, contact P. L. Stone, A/V 360-5925 or FTS 799-5925 or commercial (805) 982-5925/5974.

CR 83.029

The Concept and Economics of RDF-3 Utilization in a Navy Size Pulverized Coal Boiler, Bedford, Mass., Waste Energy Technology Corporation, May 1983, N62583-82-MT-189, ADA128588

This report addresses the economics of co-firing refuse derived fuel (RDF) in a pulverized coal boiler. The report specifies the type of RDF required, the type and cost of processing equipment to produce the RDF, the cost and type of modifications to the coal boiler, and the expected O&M costs for the modified boiler. Life cycle economic analyses based on various RDF feed rates are used to determine the suitability of RDF use in a pulverized coal boiler.

CR 83.030

Navy Floating Pier: Investigation of Dynamic Motions, Ramp Supports and Flexible Utility Connections, San Francisco, Calif., T.Y. Lin, International, Jun 1983, N62474-81-C-9404, ADB074755L

The feasibility of a floating pier concept for Navy surface combatants has been investigated further by studying the dynamic motions of the pier and by producing preliminary designs of the ramp supports and flexible utility connections. The dynamic motions of the pier were analyzed for the loading cases of berthing impact of ships, waves generated by passing ships, waves created by storm conditions, long period seiche waves and ground motions from seismic events. For all realistic loading cases, the motions of the pier were reasonable and would not present problems to personnel or equipment operating on the pier. Practical designs have been produced for the ramp supports and flexible utility connections.

CR 83.031

Properties of Weathered Uncoated and "Resaturant"-Coated Bituminous Built-Up Roofing Membranes, R. G. Mathey, W. J. Rossiter, Washington, D.C., National Bureau of Standards, Jun 1983, N68305-82-WR-20172, ADA130563

A study to compare the performance properties of weathered built-up membranes which had and had not been subjected to an application of "resaturant"-type coatings has been conducted. The membrane samples (asphaltic and coal-tar pitch), which were taken from roofs of buildings, ranged in age from 14 to 26 years. Sections of these roofs had been treated with one of three proprietary "resaturant"-type coatings. The age of coatings ranged from 12 to 29 months. The membrane samples removed from the roofs were visually examined in the laboratory to determine their general condition, the extent of adhesion between plies of felts, the number of plies, and the thicknesses of the interply bitumen. The visual examination indicated that damage to some areas of the top ply of felt of most of the coated coal-tar pitch membrane samples had occurred. The damage was attributed, in part, to removal of the aggregate surfacing prior to "resaturant"-coating application. Membrane properties measured in the laboratory for undamaged

test specimens were tensile strength, load-strain modulus, flexural strength, maximum deflection (flexure), coefficient of linear thermal expansion, and thermal shock factor. The results are applicable only to the membranes tested since the number of membrane samples and coatings included in the study were limited. Comparisons of the average values of the properties for uncoated and comparable coated specimens in general showed no significant statistical differences. In addition, no consistent trends were found as to whether or not the average values of the measured properties of the coated specimens were higher or lower than those of comparable uncoated specimens.

CR 83.032

Conceptual Designs for Berthing Pier Galleries and Deck Lighting, Houston, Tex., Brown & Root Development, Inc., Jun 1983, N62474-82-C-8303, ADA131463

Preliminary designs are presented for utility galleries to be located below the top deck of new Navy surface combatant piers. The recommended concepts for both pile supported and floating piers are similar. Both concepts have openings for ship-to-shore utility line egress which are essentially continuous along the entire length of the structure. This continuous access is a distinct advantage since it allows utility stations to be developed for new ship classes in the future without regard to pier opening constraints.

The recommended concepts utilize air-powered, fixed reels on the lower deck to both store and/or payout the electrical cables. This unique feature requires positioning of ship alongside the pier to match the electrical station, which can be easily accomplished by properly locating the mooring fittings along the pier.

An evaluation of numerous types of pier deck lighting systems was made, and it was concluded that light standards of moderate height supporting multiple-fixture arrays could be located on a pier with minimal interference with other activities. The recommended system achieves a minimum lighting level of 0.5 footcandles and can concentrate as much as 5.0 footcandles on high-tempo areas.

CR 83.033

RDF Utilization in a Navy Oil-Fired Boiler, G. H. Gardiner, A. K. Chatterjee, Oxnard, Calif., VSE Corporation, Jun 1983, N00123-82-0149, ADA130444

This report addresses the economics of co-firing refuse derived fuel (RDF) in a fuel oil fired boiler. The report specifies the type of RDF required, the cost and type of modifications to the oil boiler, and the price which can be paid for RDF based on boiler size and RDF feedrate. Life cycle economic procedures are used to develop breakeven graphs of RDF price versus boiler size.

CR 83.034

Evaluation of Naval Station Mayport Heat Recovery Incinerator, October 1981 - June 1982, Oxnard, Calif., VSE Corporation, Jun 1983, N00123-83-0-0149, ADA130445

This report is the second report which addresses the long-term evaluation of the Mayport Heat Recovery Incinerator program. Operational data were collected from 29 Sep 1981 to 27 Jun 1982 and then analyzed for reliability, availability, maintainability, thermal efficiency, and operating cost.

CR 83.035

Evaluation of the Naval Air Station Jacksonville Heat Recovery Incinerator, June - November 1982, Oxnard, Calif., VSE Corporation, Aug 1983, N00123-82-0149, ADB076625L

This report is the first report which addresses the long term evaluation of the NAS Jacksonville Heat Recovery Incinerator. Operational data were collected from June to November 1982 and then analyzed for reliability, availability and maintainability.

CR 83.036

A Method for Predicting Drag Anchor Holding Capacity, Houston, Tex., Brian Watt Associates, Inc., Aug 1983, N62474-82-C-8267, ADB076596L

The development of a method for the prediction of drag anchor holding capacity in soft cohesive soils is described. This method is unique in that it: (1) separates treatment of the anchor and the embedded mooring chain, (2) accounts for the soil cutting resistance mobilized by the embedded chain, and (3) incorporates the undrained soil shear strength in determining anchor and chain contributions. The method is applicable for several anchor types with (in-air) weights up to 50 kips. The method incorporates several chart-type design aids. An example drag anchor system design is included, along with a brief discussion of factors of safety appropriate for use with this new method.

CR 83.037

Selection and Implementation of Single Building EMCS, R. Stan, Dayton, Ohio, Stan and Associates, Inc., Aug 1983, N68305-3018-7940, ADA134006

This report addresses the selection and implementation of single building EMCS systems. The process is examined in three phases. The initial phase examines the selection of candidate buildings based on metered utility data, examination of building operation, examination of building systems and controls, and measured data. The second phase examines the capability of time clocks, duty cyclers, demand limiters, programmable controllers, micro EMCS and small EMCS. The functions performed by each are examined. Alternatives to EMCS are presented. An example calculation compares time clock control, time clock control with control enhancement, and small EMCS control of a typical air handling unit. The third phase examines the installation of equipment emphasizing interface techniques for efficient installation and operation. A summary of the analysis steps follows.

CR 83.038

Daylighting Coefficient of Utilization Tables, W. E. Brackett, Boulder, Colo., Applied Software Analysis, Aug 1983, N62583-83-MR-513, ADA134028

Use of daylighting coefficient of utilization tables provides a simple methodology for predicting interior illumination from daylight through windows. Tables are provided for transparent windows, and for windows with vertical and horizontal venetian blinds. The method predicts illuminance at five predefined target points within the room. The source code for the computer program which created the tables is included.

CR 83.039 - Cancelled

CR 83.040

Passive Solar Design Procedures for Naval Installations, W. O. Wray, F. A. Biehl, C. E. Kosiewicz, Los Alamos, N.M., Los Alamos National Laboratory, Solar Energy Group, Sep 1983, N 3305-82-MP-20006, N68305-82-MP-20010, ADA136329

The energy efficiency of buildings at Naval installations can be greatly improved through the use of passive solar heating strategies. These strategies may be applied to many existing buildings that are suitable for retrofit and are universally applicable to new construction. The purpose of this design procedure is to provide the tools required by professionals involved in building design and/or evaluation who wish to improve the energy efficiency of buildings by use of passive solar heating. Three types of tools are provided. First, a general discussion of the basic concepts and principles of passive solar heating is presented to familiarize the reader with this relatively new technology. Second, a set of guidelines is presented for

use during schematic design that will enable the user to quickly define a building that will perform in a cost-effective manner at the intended building site. Finally, a quantitative design-analysis procedure is presented that provides the user with an accurate estimate of the auxiliary heating requirements of a given passive solar design. This procedure is presented that provides the user with an accurate estimate of the auxiliary heating requirements of a given passive solar design. This procedure may be used to refine or fine tune a preliminary design based on the schematic-design guidelines or may be used during proposal evaluation to compare the merits of various candidate designs.

SUBJECT INDEX

NCEL's Techdata Sheet series, which is not listed in the main body of the Guide, has been added to this index to facilitate activities in retrieving all formal documentation produced by the Laboratory. Interested activities can request any Techdata Sheet(s) by contacting NCEL, Code L08, directly.

- AA&E magazines, physical security CR 80.009
- AAFS/TAFDS pump sets, Marine Corps N-1645
- Accelerators, concrete TDS 74-02
- Acoustic pillows, hush houses N-1665
- Acoustic profiling, seafloors N-1513
- Acoustic siting, anchors N-1523
- Acoustic stereo scanner R-787
- Acrylic-hull submersible R-778
- Acrylic plastic windows, undersea N-1468
- Adhesives
 - Epoxy resin N-1429
 - Underwater N-1367, N-1367S, TDS 75-10
- AD1NA, computer program TDS 78-04
- Advance bases
 - Containerization R-904, R-906
 - Water supply N-1650
- Air bearing devices N-1385, N-1408, TDS 75-06
- Air casters TDS 75-06
- Air, compressed N-1363
- Air conditioning
 - Cbiller condensers CR 76.004
 - Control system N-1658
 - DEAD Band control CR 79.002
 - Heat exchangers N-1599
 - Seawater cooled CR 78.008, CR 78.009, CR 79.011, N-1577
- Aircraft engine testing N-1651, N-1665
- Aircraft bangars
 - Air infiltration/stratification R-894
 - Heating N-1684
 - Reflective floors N-1482, TDS 76-09
 - Tactical sbelter system N-1606
- Aircraft power check facility N-1615
- Air curtain destructor N-1398
- Air ducts, blast wave propagation N-1543
- Air entrainment systems, bardened facilities R-820
- Airfield pavement rehabilitation CR 82.001
- Airfields
 - Concrete N-1561
 - Crasb rescue N-1368
 - Defects N-1271
 - Deminerlized water supply N-1377
 - Expedient repair N-1563
 - Fire fighting N-1368
 - LOX supply N-1377
 - Marking paints N-1539, TDS 75-33, TDS 79-05
 - Pavements N-1578, N-1610
 - Porous friction surface runway N-1487
 - Recycling pavement R-871
 - Roughness R-846, TDS 76-07
 - Sea ice R-797
- Air infiltration, aircraft hangars R-894
- Air-inflated portable shelter N-1395
- Air leakage measurements CR 77.016
- Air leakage measurements, buildings CR 83.018, CR 83.019
- Airless spray guns TDS 79-01
- Air pollutant abatement systems CR 74.001
- Air pollution
 - Asbestos N-1576, N-1591, N-1593, R-883, R-884
 - Control N-1268, CR 79.012, CR 80.023
 - Episodes N-1457
 - Gas analyzers TDS 77-08
 - Heavy shale oil TDS 78-15
 - Incinerators TDS 74-04
- Air pollution control, coal combustion N-1654
- Airport pavements
 - Concrete N-1561, N-1561S
 - Lime-stabilized base course N-1609
- Air stratification, aircraft hangars R-894
- Alarm system, trains TDS 78-13, N-1512
- Algae, growth control TDS 73-20
- Alkyd coatings, antennas N-1516
- Alkyd resins N-1439
- Alloys, supercorroding N-1550
- Alternative energy CR 80.006
- Aluminum
 - Cable conductors N-1421
 - Motor frames N-1464
- Aluminum alloy arch rib, analysis N-1652
- Amino compounds N-1259
- Ammunitions storage facilities N-1559, R-878
- Amphibious Assault Fuel System N-1582, N-1582
- Amphibious objective area CR 79.001
- Amphibious operations, containerization R-906
- Amphibious, POL N-1605
- Amphibious solid waste R-881
- Anaerobic harbor sediments, plastic durability N-1402
- Anchors N-1660
- Anchors
 - Cobesive soils N-1545
 - Coral/rock seafloors R-882S
 - Deadweight N-1587
 - Deep water N-1282
 - Design procedures R-888
 - Direct embedment N-1522, N-1523, TDS 75-11
 - Drag embedment N-1635, CR 83.036
 - Glide-out CR 73.013
 - Hydrostatic CR 74.005
 - Moorings N-1581, N-1592
 - Moorings (Diego Garcia) N-1638
 - OTEC system N-1463
 - Plate R-882
 - Propellant-actuated N-1282, N-1413, N-1441, N-1446, R-837, TDS 75-16, N-1595
- Seafloor acoustic profiling N-1513
- Seafloor soils N-1489
- Sediment disturbance N-1491
- Snow/ice/permafrost N-1344
- Soil/anchor design N-1627
- Static holding capacity CR 76.003
- Vibratory R-791, TDS 75-11
- Wire rope abrasion N-1648
- Anchor systems R-853
- AN/GYK-3(V) digital data processing system N-1397
- Antennas
 - GRP guy rods N-1321
 - Insulators N-1430, N-1459, R-839
 - VLF insulators CR 75.001, CR 81.020
- Antenna towers
 - Coatings N-1516, N-1562, TDS 76-04
 - Corrosion N-1284
 - Guy lines R-777, TDS 78-19, TDS 72-G1, TDS 76-04
- Remote monitoring N-1524
- Antifouling agents, ropes N-1423
- Antifouling concrete N-1573
- Antifouling marine concrete N-1392
- Antifouling paints, underwater applicable N-1474
- APOLLO, computer program TDS 78-25
- Armor, balastic N-1509
- Artificial ice wharf N-1416
- Artillery emplacements N-1275
- Asbestos R-900
- Asbestos
 - Construction products N-1576
 - Exposure R-883, R-884
 - Handling and disposal N-1593
 - Personnel hygiene N-1591
- Asphalt
 - Concrete N-1271
 - Concrete airfields R-871
 - Emulsion slurry seals R-792, TDS 73-18
 - Marking paints TDS 75-33
 - Recycling R-871
 - Pavement roughness TDS 76-07
 - Runways, rubber removal N-1356, TDS 75-19
- Attack resistance, physical security N-1425
- Attack resistant walls N-1508, N-1510, CR 80.025, TDS 80-02
- Attenuated total reflectance, organic coatings N-1411
- Augmenter tubes, hush houses N-1651, N-1665
- Austenitic electrodes CR 77.020
- AUTEC acoustic array N-1424
- Automatic blade control, earthmovers CR 81.015

Automatic controllers, boilers CR 83.012, CR 83.013,
 CR 83.014, CR 83.015, CR 83.022

Automatic light sensors N-1486

Automatic lighting controls N-1558

Automobiles, refinishing N-1265

Aviation fuel
 Distribution R-830
 Substitution for DF-2 diesel fuel N-1333

Backpacking, buried cylinders R-789

Ballasts, solid state N-1675

Ballistic resistance, GRP laminates R-818

Ballistic rounds, protective armor N-1509

Bandsaw, underwater R-849

BARCS, computer program TDS 78-07

Large-carrying ships N-1348

Barium metaborate pigment TDS 77-14

Barracks, vandalism CR 79.014

Bathythermographic surveys CR 79.011

Batteries, undersea use N-1391, N-1526

Beaches, oil cleanup N-1337, TDS 74-13

Beach, sediment transport N-1626

Bearing piles, wood
 Dual-treatment TDS 74-07
 Inspection TDS 76-13
 Mortar-filled barriers TDS 75-02
 Pile cutter TDS 77-11
 Preservative system TDS 78-50, TDS 73-16
 PVC barrier TDS 74-12

Bearings, tower base N-1461

BEQ
 Hot water use N-1387
 Vandalism CR 78.013, CR 78.016, CR 78.017,
 CR 78.021, CR 79.014

Binders (chemical), beach sand N-1546

Biocides, paints R-802, TDS 73-20

Biodeterioration
 Concrete N-1308
 Hydrogen sulfide-containing soils N-1263
 Materials R-810
 Pilings N-1298, N-1466, N-1505
 Wooden panels R-850

Biofouling
 OTEC plants R-868
 Prevention R-893
 Tracking arrays N-1500

Bituminous coatings, roofs CR 83.031

BLAST, computer program TDS 78-11

Blast design, response charts N-1669

Blast loading
 Beams and slabs CR 81.010
 Concrete slabs N-1434, N-1494
 Steel cylinders R-809

Blast cells, munition facilities R-823

Blast doors, dynamic design N-1518

Blast environment for cubicles R-828

Blast leakage, ordnance cubicles R-780

Blast-on structures simulator CR 74.004

Blast pressures, explosives N-1390

Blast-resistant concrete slabs CR 80.026, CR 80.027,
 CR 80.028

Blast waves, air ducts N-1543

Blind bolts N-1571

Blind bolts, underwater cables R-897

Blind oversize mechanical fasteners CR 81.004

Block walls, concrete TDS 75-31

Bluff bodies, flow-induced vibrations N-1493

Boiler control systems CR 83.012, CR 83.013,
 CR 83.014, CR 83.015, CR 83.022

Boiler fuel
 Waste oils N-1618
 Water-in-oil emulsion N-1653

Boilers
 Coal-fired CR 79.005, CR 79.012, N-1654
 Heavy shale oil TDS 78-15
 Modular systems TDS 78-41
 Monitoring N-1454

Boilers (continued)
 Oil-fired N-1580
 Oil-RDF fired CR 83.033
 RDF-fired CR 83.029
 Steam separators N-1586
 Sulfur dioxide removal R-864
 Waste oil TDS 80-04, N-1570, N-1674

Bomb-damaged runways N-1563

Bomb damage repair, runways R-902, N-1631, N-1676

Booms, oil containment N-1330, N-1343, N-1440

Boundary element analysis N-1664

Bounding surface plasticity model CR 83.010, CR 83.011

Boxcard, heat-activated alarm N-1512, TDS 78-13

Breakwaters
 Flexible N-1351
 Floating N-1568, N-1601
 Transportable N-1529

Brick waterproofing TDS 77-16

Building construction, polar areas
 Caulking compounds TDS 75-03
 Portland cement concrete TDS 75-08
 Site preparation TDS 73-13

Building defacement, mildew N-1647

Buildings
 Air leakage CR 77.016, CR 83.018, CR 83.019
 Algal growth TDS 73-20
 Asbestos N-1576, N-1591, N-1593
 Attack-resistant N-1508, N-1510
 Cleaning compound TDS 74-08S
 Contract performance TDS 74-01
 Earthquake-resistant N-1579
 EMCS CR 83.037
 Energy conservation N-1598
 Exterior paints TDS 80-06
 Floors TDS 75-22
 Craftiti TDS 73-19
 Insulation CR 80.001, CR 80.012, CR 83.005
 Lead-based paint TDS 77-04
 Natural ventilation cooling N-1666
 Paint film gages TDS 74-11
 Paint quantities TDS 76-03
 Physical security N-1425
 Roof coatings TDS 77-12
 Rust removers TDS 77-06
 Seismic design N-1671
 Solar heating R-835
 Tropical environments TDS 77-18
 Vapor retarders CR 83.006

Bulk fuel transfer N-1645

Bulldozers
 Drawbar pull N-1444
 Fluidic control unit N-1419
 Snow tractor TDS 73-14

Buoyance transport vehicle R-779

Buoys TDS 73-09, N-1667

Buoys, seminar N-1681

Buried
 Aviation fuel lines R-830
 Fuel capsules R-798
 Steel cylinders R-809

Buried cylinders
 Analysis R-838
 Behavior R-789
 Design curves R-816

Bus supports, electrical N-1366, TDS 75-20

Butler roof, PUF coating N-1450

Cable dynamics
 Material properties CR 82.017
 Motion compensation N-1621
 SEADYN computer program N-1630
 SEADYN mathematical models CR 82.019
 SEADYN programmer's manual CR 82.018
 SEADYN program verification CR 82.014
 SEAPLT graphics post-processor CR 82.016
 SNAPLD computer program N-1619

Cable-following technology N-1611

Cables

Aluminum conductor N-1421
Connectors (underwater) R-875, TDS 75-15,
TDS 80-11
DECEL1 computer program N-1584
Deep ocean burial N-1453, R-886
Deep-sea deployment N-1365
Dynamics CR 80.018, CR 80.019, CR 81.023
Electrical N-1477
Electromechanical N-1303, N-1403, N-1437
Fatigue CR 77.010
Flow-induced vibrations N-1493
Immobilization N-1421
Mooring CR 82.015
Nondestructive testing N-1594, N-1639, N-1657,
N-1661
Shrinkable splice covers N-1503
Splicing N-1452, N-1537, TDS 75-29, TDS 78-20,
R-891
Split-pipe-protected N-1498, CR 78.007, R-897
Strumming N-1583
Submarine installation N-1323
Swivel/slipping N-1383
Systems CR 79.006, CR 79.007,
CR 79.008, CR 79.009
Trenching N-1335, N-1521
Underground N-1325, N-1506
Underwater N-1525, CR 78.001, N-1571
Cable structures, fixed, underwater R-848
Cable strumming N-1456, N-1499, N-1608, R-815,
CR 83.004
Cable strumming suppression CR 81.005
Cable systems, lifting and mooring N-1288
Cable trencher R-890
Calcareous sediment N-1334, N-1515, N-1542
Calcareous sediments, grain crushing CR 83.020
Camp facilities, containers N-1369
CAP75, viscoplastic algorithm CR 82.021
Cargo fire hazards CR 80.016, CR 024
Cargo handling
Air bearing devices N-1385, TDS 76-06
Amphibious operations N-1270
Analysis N-1386
Elevated causeway N-1680
Ships N-1257
Ship-to-shore N-1258
Transfer at sea N-1257
Carpets N-1384, TDS 75-22
Cathodic protection
Fleet mooring TDS 73-09
Steel pontoons TDS 75-05
Water tanks TDS 73-11
Caulking compounds R-812, TDS 75-03
CEL-1 lighting computer program CR 81.026, CR 83.009
CEL/NONSAP computer program CR 75.004, CR 75.005
CEL SAPS computer program TDS 78-12
Cement, ferro N-1341
Central air-handling/mixing system TDS 78-48
Central air-handling/reheat system TDS 78-43
CH42, computer program TDS 78-36
Chain-link gates TDS 78-40
Chemical binders, beach sand N-1546
Circuit breakers
Shore-to-ship electrical system N-1309
Solid state N-1375, TDS 75-27
Classified material, destruction N-1332, R-840
Cleaning compounds, enzyme-catalyzed N-1338, N-1338S,
TDS 74-08S
Cleaning
Navy buildings N-1379, N-1379S
Underwater surfaces N-1602
Coal combustion, boilers N-1654
Coal-fired boilers CR 79.005, CR 79.012,
CR 80.023, R-879
Coal gasification CR 77.013, CR 77.014, CR 78.019
Coal-RDF boilers CR 83.029
Coanda-effect, oil-water separation N-1331, N-1389

Coatings

Aircraft hangars TDS 76-09, N-1482
Aluminum N-1291
Antenna Towers N-1516, N-1562
Antifouling N-1573
Application TDS 75-31
Automobiles N-1265
Chain-link fences TDS 76-16
Conductive floorings R-872
Elastomeric roofing systems N-1496
Exterior, repair TDS 80-06
Fuel lines N-1311, R-832, TDS 75-26
Free-film test method R-827
Guy lines R-777, TDS 72-01
Heat exchangers N-1560
Holiday detection TDS 78-38
Incompatibility TDS 77-19
Inspection TDS 77-09
Lead-based N-1455, TDS 77-14
Mildew N-1647
Organic N-1411
Over-rust primers R-863, N-1382, TDS 78-39
Programmed TDS 79-10
Roof TDS 77-12
Rust arresting TDS 78-51
Rust removers N-1531
Salt ions N-1373
Stainless steel flake pigmented N-1278, R-836
Steel N-1260, N-1278, N-1290, R-786, R-836,
TDS 75-32, TDS 72-04
Steel pontoons TDS 75-05
Steel sheet pilings N-1277
Surface preparation TDS 79-04
Swimming pools TDS 77-10
Tropical environments TDS 77-18
Underwater-applied N-1426, TDS 75-32
Utility lines R-857
Water emulsion epoxy N-1374
Waterproof sealer N-1478, TDS 77-16
Water tanks TDS 77-09, TDS 73-11
Wooden piling N-1253, TDS 74-12, TDS 74-07
Zinc inorganic silicate R-776
Zinc-rich organic R-784
Coaxial cables N-1537
Coaxial cable, splicing R-891
Coaxial connectors R-875, TDS 80-11
Cofferdam, TRIDENT drydock N-1636
Cogeneration systems R-879, N-1596, N-1616, CR 81.001
Cogeneration, waste heat recovery N-1642
Cohesionless soils, earthquakes R-847
Cohesive soils
Drag anchors CR 83.036
Modeling CR 83.010, CR 83.011
Seafloor N-1545
Cold-weather application of caulking compounds R-812
Cold weather applications, fuel handling CR 81.024
Cold regions, water supply N-1650
Combat protective structures R-807
Combat service support CR 83.024
Composition 8 explosive N-1390
Compressed air testing N-1363
Compressive strength, undersea concrete N-1603
Computerization, physical security CR 80.013
Computer program
Airfield roughness R-846
Blast loading N-1518
Cogeneration optimization N-1596
Indirect boundary element method N-1664
Interior lighting design CR 83.009
Natural ventilation cooling N-1666
Computer programs
ADINA TDS 78-04
APOLLO TDS 78-25
BARCS TDS 78-07
BLAST TDS 78-11
CAP75 CR 82.021, CR 83.023
CEL-1 CR 81.026, CR 83.009

Computer programs (continued)

CELCAP	CR 81.001	Concrete beams, FEAP computer program	CR 82.020
CEL SAP5	TDS 78-12	Concrete buildings, passive solar retrofit	CR 82.007
CH42	TDS 78-36	Concrete piers	CR 83.007
CUMLIQ	TDS 78-24	Concrete structures, seismic design	N-1671
DAEM	TDS 78-29	Conductive flooring	N-1289, N-1470, R-872
DECEL1	N-1584	Conduits	
DRAIN-2D	TDS 78-22	Corrosive marine environments	R-821
DRAIN-TA8S	TDS 78-35	Fuel	N-1420
DYNFA	TDS 78-08	Galvanized steel	TDS 75-24, TDS 75-30S
ETA8S	TDS 78-23	Connectors	
FLUSH	TDS 78-21	Coaxial	TDS 80-11
FVSOLVR and FVPL0T	N-1549	ISO containers	N-1670
GEN3D	TDS 78-17	Construction	
INSIA8	TDS 78-09	Asbestos	N-1576
OPTIREC	TDS 78-30	8last-resistant	TDS 76-15
OVER	TDS 78-10	Earthquakes	N-1579
PLOT1DX	TDS 78-18	Earthwork	N-1514
PLOT3DX	TDS 78-16	Land	CR 79.001
RECUR	TDS 78-37	Site lighting	N-1274
RESPL0T	TDS 78-28	Polar areas	N-1406
SAKE	TDS 78-34	Construction management, EMCS systems	CR 83.001
SDOOR	TDS 78-06	Contact impact problems	CR 75.007, CR 75.008, CR 77.001, CR 77.002
SEADYN	N-1630, CR 80.018, CR 81.023, CR 82.014	Container habitats, electrical systems	N-1336
SHAKE	TDS 78-33	Container handler/transporter	N-1270
SIMQKE	TDS 78-27	Container handling crane	N-1668
SINGER	TDS 78-05	Container hopper	N-1313
SNAPLOAD	CR 80.019, CR 81.023	Containerization	
Solar Systems	TDS 79-06	Advance bases	R-904, R-906
SPECEQ	TDS 78-31	Air bearing device	N-1385, N-1408, TDS 76-06
SPECTR	TDS 78-32	Air casters	TDS 75-06
TIMH1S	TDS 78-26	Amphibious operations	N-1270
VISICE and VISFIT	CR 79.016	Barges	N-1348
Computer simulation		Desalination plant	N-1370, CR 78.005
Cable dynamics	CR 82.017	Fuel modules	N-1445
Moorings	N-1604	Habitats	N-1369, R-861
Concrete		Handling operations	R-852-V
Antifouling	N-1392, N-1573	Hangars	N-1606
Arch magazines	N-1394	Intermediate size	N-1614
Asphalt, recycling	R-871	ISO	N-1670
Blast-loaded slabs	N-1494	Laundry/shower modules	N-1547
Blast loading	CR 81.010	Living modules	R-796
Calcareous sands	N-1542	Load-handling	N-1381
Compressive strength	N-1308	Magromover	TDS 75-06, TDS 76-06
Conductive flooring	R-872	Off-loading	R-852-1, 11, 111, 1V, N-1529
Cylindrical structures	R-790, R-874	Ship to shore	N-1258
Expansive cement	N-1264, N-1504	SMLS requirements	N-1386
Floating piers	N-1447, CR 82.031	Container offloading/transfer	N-1625
Floor maintenance	TDS 75-22	Containment booms, oil spills	N-1330, N-1343, N-1440
Hydrospace simulators	CR 73.009	Contaminant tracking, electrical	TDS 75-20
Insulated walls/roofs	N-1574	Contaminants, heavy metals	N-1490
Latex-modified	TDS 78-01	Contamination, oil	N-1322, N-1337, N-1343
Light weight	N-1565	Continuum mechanics	CR 75.007, CR 75.008, CR 77.001, CR 77.002
Mixer	N-1357	Controllers, EMCS	N-1678
Ocean placement	CR 77.006, N-1544	Cooling systems	
OTEC structure	N-1448	Convection cells	R-870
Polar areas	TDS 75-08	Seawater	N-1528
Polymer-modified	N-1319, N-1479	Copper cables, fatigue	CR 77.010
Pontoons	TDS 77-03	Coral seafloors, anchors	R-882S
Portland cement	TDS 75-08	Core samples, seafloor	N-1295
Rapid hardening	N-1300, TDS 74-02	Corer, seafloor	N-1462
Reinforced slabs	N-1434, CR 80.026, CR 80.027, CR 80.028	Corona streamers	CR 75.001
Repairing	TDS 77-02, TDS 74-02	Corrosion	
Seawater absorption	N-1436	Aluminum	N-1291
Semi-submersible platform	N-1297	Circuit breakers	N-1309
Shrinkage-compensating	N-1561, N-1561S	Concrete pontoons	TDS 77-03
Spheres	N-1364, R-805, R-869	Deep ocean materials	N-1424
Spherical hulls	R-785	ECHO tower	N-1284
Storage tanks	CR 80.014	Electrical conduits	TDS 75-24
Submerged blocks	N-1308	Electrical motors	N-1464
Swimming pools	TDS 77-10	Fencing	TDS 76-16, TDS 72-02
Undersea compressive strength	N-1603	Fuel lines	N-1311, TDS 75-26
Underwater structures	R-817	Galvanized steel fence posts	N-1467
Waterfront facilities	N-1429	Guy lines	TDS 72-01
Waterproof sealer	N-1478, TDS 77-16	Hydrophone support structures	N-1267
Windor Probe Test	TDS 77-20	Inspection	TDS 76-13

Corrosion (continued)	
Metal and alloys	R-834
Moorings	TDS 73-09
Nut removal	TDS 77-05
OTEC plants	R-868
Pontoons	TDS 75-05, TDS 75-05
Rust remover	TDS 77-06
Steel	N-1259, TDS 78-51
Underwater tracking arrays	N-1500
Utility lines	R-857
Water tanks	TDS 73-11, TDS 77-09
COTS	R-852-1, 11, 111, IV, V
COTS, cargo handling	N-1680
COTS system, TCDF crane	N-1625
COTS-TCDF, container handling	N-1668
Couplings, electromechanical	N-1484
Coverings, conductive flooring	R-872
Crane	
Container handling	N-1668
TCDF	N-1625
Crank-Nicolson time integration	CR 80.021
Crash rescue, airfields	N-1329
Creosote-coal tar coatings	N-1253
Creosote, marine piling	TDS 78-50, TDS 79-07
Crime, Navy facilities	CR 78.002, CR 79.014, CR 80.010, CR 81.002
Crime prevention, facility design	N-1629
Critical electrical loads	TDS 75-18
Cryogenic insulations	N-1302
Cryogenic liquids	N-1269
CUMLIQ computer program	TDS 78-24
Cupro-nickel sheathing, piling	N-1298
Current forces, moorings	N-1633, N-1662
Currents	
Measurement	N-1564
Thermal anemometers	R-893
Cylinders, buried	R-789, R-838
DAEM computer program	TDS 78-29
Daylighting	CR 83.038
Dead band control	CR 79.002
Deadweight anchors	R-859, N-1587
Deadweight anchors, selection guide	N-1627
DECELL, computer program	N-1584
Deck lighting, piers	CR 83.032
Decoupler, electromechanical	TDS 75-28
Deep ocean	
Batteries	N-1526
Cable burial	R-886
Cable systems	N-1288, N-1608
Calcareous sediments	N-1334
Concrete spheres	R-805
Concrete structures	N-1565, N-1603
Deployments	N-1365
Drilling	N-1283
Electromechanical cable connectors	R-806
Pile emplacement	N-1286
Salvage operations	N-1269
Sediments	R-873
Work vehicle	N-1540
Deep ocean structures, concrete	N-1603
Deformation behavior, rocks	R-788
Demand controllers	TDS 77-15
Demineralized water	N-1377
Desalination plant	N-1285, N-1370
Desalination	
Freezing	CR 80.011
Reverse osmosis	N-1644
Desalination unit, containerized	CR 78.005
Desert water supply	N-1637
Destructor, classified material	N-1332
Deterioration	
Markings	TDS 75-33
Plastics	N-1402
DF-2 diesel fuel	N-1333
Diego Garcia, potable water	R-898
Direct embedment anchors	N-1522, N-1660
Direct-embedment anchors, selection guide	N-1627
Disposal sites, solid waste	CR 81.017, CR 81.018, CR 81.019
Disposal, solid wastes	CR 80.003
Distillate fuel, spills	N-1353
Distillation	N-1285, N-1370
Diver construction, transport vehicle	R-779
Diver electrical safety	R-896
Diver heater	
Electrochemical	N-1315
Self-contained	N-1501
Diver heating system	CR 73.016
Diver-installed fasteners	N-1262
Diver-operated nut splitter	N-1483
Diver-operated work systems	N-1358
Divers' compressed air, testing	N-1363
Divers, electrical shock	N-1607
Diver's lift assist devices	N-1345
Divers, underwater tools	R-892
Diver tools	
Hydraulic motor	CR 80.015
Seawater hydraulics	R-895, CR 82.025, CR 82.026
Diving Unit Complex 6	N-1355
Domestic hot water, solar heating	R-835
Doors	
Magazines	R-901
Physical security	CR 80.007
DG31ST-11	N-1438
Downhaul cables, anchors	N-1648
Downspouts	TDS 80-03S
Dracone, fuel bladder	N-1605
Drag embedment anchors	CR 83.036, N-1635
DRAIN-2D computer program	TDS 78-22
DRAIN-TABS computer program	TDS 78-35
Drawbar pull, bulldozers	N-1444
Dredging	R-899
Dredging, harbors	N-1597
Drills	
Diver-operated	TDS 75-07
Masonry	TDS 75-07
Rock	TDS 75-07
Underwater	N-1339
Drifting snow	TDS 73-08
Drydocks	
Certification	N-1548
Dewatering cofferdam	N-1636
Waste treatment	N-1490
Ducts (air), blast waves	N-1543
DYNFA, computer program	TDS 78-08
Earth heat sinks	N-1261, N-1306
Earthmovers, laser control	CR 81.015
Earthquake modeling, computer programs	
APOLLO	TDS 78-25
CH42	TDS 78-36
CUMLIQ	TDS 78-24
DAEM	TDS 78-29
DRAIN-2D	TDS 78-22
DRAIN-TABS	TDS 78-35
ETA8S	TDS 78-23
FLUSH	TDS 78-21
OPTIREC	TDS 78-30
RECUR	TDS 78-37
RESPLIT	TDS 78-28
SAKE	TDS 78-34
SHAKE	TDS 78-33
SIMQKE	TDS 78-27
SPECEQ	TDS 78-31
SPECTR	TDS 78-32
TIMHIS	TDS 78-26
Earthquakes	
Analysis	R-847
Concrete structures	N-1671
Design levels	N-1579
Economic analysis of structures	N-1640
Ground motion estimating	R-867

Earthquakes (continued)

Liquefaction N-1530, N-1555, N-1566
 Point Mugu damage N-1307
 Shock design N-1590, N-1622
 Site studies R-885
 Earth-sheltered structures N-1598
 Earthwork construction N-1514
 Elastic properties, sea ice N-1417
 Elastostatics N-1664
 ELCAS, cargo handling N-1680
 Electrical

Cables N-1452
 Circuit breakers N-1309, N-1375
 Distribution systems N-1336
 Electromechanical motor couplings N-1484
 Grid systems N-1502
 Hospital hazards N-1273, N-1401
 Lights control N-1486
 Monitoring power lines TDS 75-17, TDS 75-18,
 TDS 78-03
 Motor corrosion N-1464
 Nearshore cables N-1428
 Plastic-coated conduits R-821, TDS 75-24
 Power line anomalies N-1414
 Power transients N-1388, N-1519
 Shore-to-ship power cables N-1421, N-1477
 Switchgear N-1366, TDS 75-20
 Underground distribution N-1316
 Underwater power N-1569
 Usage TDS 80-01, TDS 80-05, TDS 80-07,
 TDS 80-08, TDS 80-09, TDS 80-10

Wind-generated power N-1460, N-1485
 Electrical power, underwater R-896
 Electrical properties, paint N-1412
 Electrical shock, divers N-1607
 Electrical transients, fluorescent ballasts N-1675
 Electric cables, underwater splicing R-891
 Electricity

Cogeneration CR 78.014, CR 79.012
 Wind-generated N-1655
 Windmills N-1613
 Electric power generation, solar CR 78.003
 Electrochemical heater, diver CR 73.016, N-1315
 Electrocutation, hospitals N-1273
 Electroencephalographs R-876
 Electrohydraulics N-1432
 Electrohydraulic stress wave source, tunneling N-1511
 Electromagnetic pulse (EMP) N-1617
 Electromagnetic shielding, hospitals N-1401, R-876
 Electromechanical cables

Connectors R-806, TDS 75-15
 Kinks N-1403
 Splicing TDS 75-29
 State of the art N-1303
 Swivel/slipping TDS 75-28
 Underwater repair N-1437
 Electromechanical couplings, motors N-1484
 Electromechanical swivel/slipping assembly N-1383
 Electromyographs R-876
 Electronic equipment, desensitization N-1256
 Elevated causeway R-826, R-852-1, 11, 111, IV, V
 Elevated causeway, cargo handling N-1680
 Elevated hose line R-814
 Elevated snow roads R-819

Embedment anchors N-1489, N-1491, N-1522, N-1523
 Embedment anchors, design procedures R-888
 Embedment anchor, vibratory R-791
 Embedment gages, strain N-1310
 EMCS

Cost estimating data CR 83.008
 Energy savings calculations CR 82.030
 Factory test procedures CR 83.002
 Inspection guidelines CR 83.001
 Modules N-1588
 Operator training CR 82.027, CR 83.021
 Performance test procedures CR 83.003

EMCS (continued)

Single building controllers CR 82.028, CR 83.037
 Single building energy controllers N-1678
 Steam heat control N-1663
 Emergency exiting, secure spaces N-1536
 Emulsions, water-in-oil N-1653
 Encapsulation, asbestos R-900
 End connectors, antenna guy rods N-1321
 Energetics total load sediment transport N-1626
 Energy calculations, night setback system TDS 78-42
 Energy conservation

Air conditioning N-1577
 Aircraft hangars R-894
 Air leakage measurements CR 83.018, CR 83.019
 Architectural design N-1598
 Bituminous-coated roofs CR 83.031
 Boiler controllers CR 83.012, CR 83.013,
 CR 83.014, CR 83.015, CR 83.022
 Boiler fuel N-1653
 Building insulation CR 78.006
 Coal combustion N-1654
 Coal-fired boilers CR 79.012
 Coal gasification CR 78.019
 Cogeneration CR 78.014, CR 81.001,
 N-1596, R-879

Conversion CR 79.005
 Deadband control TDS 79.002
 Dimming controls TDS 80-07
 Electrical consumption N-1623
 Electrical monitoring TDS 78-03
 EMCS cost data CR 83.008
 EMCS energy savings calculations CR 82.030
 EMCS operators CR 82.027
 EMCS operator training CR 83.021
 EMCS systems CR 83.001, CR 83.002, CR 83.003,
 N-1663

Field energy survey TDS 79-02
 Fluorescent lamps TDS 76-11, TDS 80-01,
 TDS 80-05, TDS 80-07

Gas analyzers TDS 77-08
 Heat recovery incineration CR 82.029, CR 82.032,
 CR 82.033, CR 83.016, CR 83.017,
 CR 83.025, CR 83.028, CR 83.034,
 CR 83.035, N-1659

HVAC control systems N-1658
 HVAC heat pump N-1673
 Hot water N-1387
 HP sodium lighting TDS 78-02, TDS 80-01
 Incinerators, heat recovery CR 79.003, CR 81.012
 Insulated concrete N-1574
 Insulation TDS 78-53, TDS 79-03,
 CR 80.001, CR 80.012, CR 83.005

Lighting N-1558, CR 79.015, TDS 80-01
 Management systems TDS 77-15
 Microprocessors N-1588
 Mobile laboratory N-1620
 Modular boiler systems TDS 78-41
 Monitors and control systems TDS 76-12, CR 81.013
 Natural ventilation cooling N-1666
 On-Off controls TDS 80-08
 Passive solar design CR 83.040
 Passive solar retrofit CR 82.007
 Polyurethane foam roofing system TDS 77-12,
 N-1643

Radiant heaters N-1684
 Refuse-derived fuel CR 83.033
 Roof insulation N-1600
 Seawater cooling N-1528, CR 78.008,
 CR 78.009, CR 79.011

Shower heads TDS 76-10
 Single building EMCS CR 82.028, CR 83.037, N-1678
 Skylights TDS 80-07, TDS 80-09, CR 82.022
 Solar systems TDS 79-06, N-1517, N-1599,
 R-877, CR 82.002, CR 82.003,
 CR 82.004, CR 82.005, CR 82.006

Solid waste processing CR 82.001
 Solid waste recovery CR 80.003

Energy conservation (continued)

- Sprayed polyurethane foam roofs N-1656
- Storage options CR 82.034
- Strategies CR 74.006, CR 74.007, CR 75.003
- Thermal energy recovery N-1679
- Thermostat setback systems TDS 78-43, TDS 78-44, TDS 78-45, TDS 78-46, TDS 78-47, TDS 78-48, TDS 78-49
- Transient suppressors N-1532
- Vapor retarders CR 83.006
- Waste heat recovery N-1616, N-1642
- Waste-oil-fired boilers N-1674
- Waste oils N-1570, N-1580, N-1618
- Wind-driven generators TDS 78-52, N-1613, N-1641
- Wind energy conversion system N-1655
- Energy conversion plants CR 80.002, CR 80.005
- Energy conversion systems CR 80.006
- Energy Data Mobile Laboratory TDS 78-14, N-1620
- Energy monitoring and control systems CR 81.013, CR 82.027, CR 82.028
- Energy profiles, electrical N-1623
- Energy storage facilities CR 82.034
- Energy storage, metal hydrides N-1393
- Energy utilization, solid waste N-1465
- Enlisted quarters TDS 80-03
- Environmental control, asbestos R-900
- Enzyme-catalyzed cleaning compounds N-1338, N-1338S
- Epoxy
 - Adhesives N-1367, N-1367S
 - Antenna coatings N-1516
 - Concrete repair N-1429, TDS 77-02
 - Modified concrete formulation N-1479
- Equipment hardening N-1622
- Equipment, mass analysis N-1254
- Erosion TDS 74-13
- ESKIMO VI tests R-889
- ETABS computer program TDS 78-23
- Excavation
 - Cable burial N-1453
 - Explosive N-1409, R-843
 - Ice N-1415, R-851
 - Track drill N-1339
 - Underwater N-1677
- Exhaust gas, jet engines CR 74.001
- Expansive cement concrete N-1264, N-1504, N-1574
- Expedient combat protective construction R-807
- Expedient pavements N-1572, N-1578, N-1676, R-902
- Expedient soil surfacing CR 73.007, CR 77.017, N-1280, N-1472, N-1553
- Expedient surfacing, runway repair N-1631
- Expeditionary airfields N-1329, N-1368, N-1553
- Expendable Doppler penetrometer N-1435, R-855
- Explosions, accidental N-1518
- Explosions, accidental (computer programs)
 - ADINA TDS 73-04
 - BARCS TDS 76-15, TDS 78-07
 - BLAST TDS 78-11
 - CEL SAP5 TDS 78-12
 - DYNFA TDS 78-08
 - INSLAR TDS 78-09
 - OVER TDS 78-10
 - SDOOR TDS 78-06
 - SINGER TDS 78-05
- Explosives
 - Blast cell tests R-823
 - Blast design N-1669
 - Boxcars TDS 78-13
 - Charge shape N-1390
 - Hole drilling R-862
 - Magazine doors R-901
 - Protective structures R-889
 - Storage R-878
 - Transportation CR 79.010
 - Underwater excavation N-1409
- Exterior paints TDS 80-06
- Facility design R-901
- Facility design, crime prevention N-1629
- Facility planning procedures CR 81.022
- Fasteners, seafloor N-1682
- Fastener systems
 - Underwater construction CR 81.004
 - Underwater salvage N-1262
- Fatigue testing, pressure vessels N-1612
- FEAP, computer program CR 82.020
- Fences, chain-link TDS 76-16, TDS 72-02
- Fencing posts, PVC-coated N-1467
- Fendering system
 - Elevated causeway R-852-IV
 - Hi-Dro Cusbion N-1380
- Fenders, piers CR 80.004
- Ferro-cement construction panels N-1341
- Fiberglass insulation CR 78.006
- Fiberglass plastics N-1578
- Fiberglass-reinforced plastic pipe R-830
- Fiberglass-reinforced plastic soil surfacing CR 73.007, CR 77.017, CR 78.018, CR 79.013, N-1280, N-1527, N-1563
- Fiberglass-reinforced polyester laminate R-818
- Fiberglass-reinforced polyester panels, pavements N-1676
- Finite element
 - Analysis CR 81.007, CR 81.008, CR 82.012, CR 83.027
 - Applications R-856, R-866, N-1552
 - Computer programs, sea ice CR 79.016
 - Head injury model R-854-I, II
 - Mindlin plates CR 81.006
 - Soil modeling CR 82.013
- Finite element analysis, cohesive soils CR 83.010, CR 83.011
- Fire fighting
 - Airfields N-1329
 - POL fires CR 81.011
- Fire protection system, hyperbaric chamber N-1272
- Fire-resistant roofing CR 79.004
- Fires, offshore POL CR 80.016, CR 80.024
- Fire testing, polyurethane foam roofing N-1683
- Fleet mooring, inspection R-1557
- Flexible breakwaters N-1351
- Floating
 - Advanced base components N-1371
 - Breakwaters N-1568, N-1601
 - Concrete piers N-1447
 - Fuel bladder N-1605
 - Landing stages TDS 77-03
 - Piers TDS 77-03, CR 82.031, CR 83.030
 - Sea-ice sheets R-860
- Floodlight trailer N-1274
- Floors
 - Conductive N-1289, R-872
 - Coverings N-1384
 - Ordnance facilities N-1470
 - Maintenance TDS 75-22
 - Relocatable R-841, TDS 76-02
 - Warehouses TDS 76-05
- Flue-gases
 - Analysis N-1454, TDS 77-08
 - Desulfurization CR 79.012, CR 80.023
- Fluid amplifier N-1314
- Fluidic concepts N-1349
- Fluidic control unit N-1419
- Fluidized-bed coal combustion CR 80.006
- Fluidized-bed heat exchangers N-1340
- Fluid mechanics CR 82.010
- Fluke-type anchors N-1522
- Fluorescent lights N-1532, TDS 80-01, TDS 80-05, TDS 80-07
- Fluorescent lights, solid state ballasts N-1675
- FLUSH computer program TDS 78-21
- Flux line distribution N-1502
- Foam generators, smoke scrubbers N-1268
- FOMAT soil surfacing N-1472
- Footings, seafloor N-1276
- Forceful entry resistance N-1425

Forcible entry	
Chain-link gates	TDS 78-40
Doors	CR 80.007
Vents	CR 80.017
Fouling	N-1263, R-810, CR 78.010
Foundation Monitor System (FMS)	R-775
Foundation piles, in-situ length	N-1475
Foundations	
Drydocks	N-1548
Permafrost	R-870
Seafloors	N-1281, R-799, TDS 75-09
Seafloor acoustic profiling	N-1513
Soil sampling	R-873
Fracture-fatigue analysis	N-1355
Fracture mechanisms, rock	R-788
Free paint films, tensile properties	R-827
Freezer desalination	CR 80.011
Freezing cells, sea ice	R-811, R-845
Friction, calcareous sands	N-1542
FRP housing system	N-1399
Fuel	
Buried capsule	R-798
Conservation	TDS 77-08, TDS 77-15, TDS 80-04
Handling, hydrocarbon	N-1378
POL	N-1645
Solid waste	CR 80.002, CR 80.005
Spills, fires	CR 80.016, CR 80.024
Storage tanks	CR 80.014
Transport/dispenser system	N-1445
Transport over deep snow	R-814
Waste oils	N-1570, N-1580
Fuel bladder, floating	N-1605
Fuel buoy	N-1667
Fuel fires	CR 81.011
Fuel gas	CR 77.013, CR 77.014
Fuel handling, all-weather operations	CR 81.024
Fuel lines	
Piers	N-1311, TDS 75-26, TDS 75-30S
Protection	R-832
Fuel oil	TDS 78-15
Fuel oil, reclaimed	N-1674
Fuel transfer	
Offshore	N-1585
Overland	N-1582
Fully vented explosions in cubicles	R-828
Fungal-resistant organotin paints	N-1480
Fungal-resistant organotin resins	N-1439
FVPLLOT, computer program	N-1549
FVSOLVR, computer program	N-1549
Gages, paint film	TDS 74-11
Galvanized steel fence posts, PVC-coated	N-1467
Gas analyzers, portable	N-1454
Gas, coal substitute	CR 79.005
Gasification	CR 77.013, CR 77.014, CR 78.019
Gas leak detection	TDS 75-23, TDS 79-02
Gates, chain-link	TDS 78-40
Generators	
Radioisotope (RTG)	N-1304
Solar powered	CR 78.003
Wind-driven	TDS 78-52
GEN3D computer program	TDS 74-17
Geotechnical engineering	CR 82.013
Geothermal energy conversion	N-1534
Glass-reinforced plastic antenna guy rods	N-1321
Glide-out anchor	CR 73.013
Gloss latex enamels	N-1326
Global-local finite elements	CR 75.002
Grabber load test system	N-1615
Graffiti removal	TDS 73-19
Graving docks	N-1548
Grease traps, cleaning	N-1338, N-1338S, TDS 74-08
Grids, electrical	N-1502
Ground fault detectors, underwater	R-896
Grounding systems, conductive floors	N-1458
Ground motion studies	R-808, R-808S
Groundwater, RDX contamination	N-1488
Grout-dispensing system, underwater	N-1347, TDS 75-13
Grout dispensing tool	N-1682
Guideline systems	N-1365
Guyed towers	N-1442, N-1461
Guy lines	R-777, TDS 72-01, TDS 76-04, TDS 78-19
Habitats, temporary	R-796
Hangars	
Arch rib structure	N-1652
Energy conservation	R-894
Reflective floors	N-1482
Transportable	N-1606
Harbors	
Dredging	N-1597, N-1589, R-899
Oil spills	N-1293, N-1372, N-1443
Hardened facilities	
Deep underground	R-833
Shock wave propagation	R-820
Water wells	N-1407
Hasps	TDS 76-08R
Head injury modeling	R-854-1, II
Heat-activated alarm, boxcars	N-1512, TDS 78-13
Heat control, tunnels	R-873
Heat dissipation, power plants	N-1261
Heater, diver's	CR 73.016, N-1315, N-1501
Heater recovery requirements, hot water	TDS 75-01
Heat exchanger	
Coatings	N-1560
Earth-coupled	N-1599
Fluidized-bed	N-1340
Heating and ventilating system	TDS 78-47, TDS 79-02
Heating	
Aircraft hangars	N-1684
Control systems	N-1658
Earth-coupled heat exchangers	N-1599
Solar	R-835
Heating (steam), EMCS	N-1663
Heating systems	CR 79.002
Heat loss, housing	TDS 78-53
Heat pump, metal hydride	N-1492
Heat pumps	N-1673
Heat recovery	
Cogeneration systems	R-879, CR 81.001
Incinerator	CR 77.008, CR 77.009, CR 79.003, CR 81.012, CR 82.029, CR 82.032, CR 82.033, CR 83.016, CR 83.107, CR 83.025, CR 83.028, CR 83.034, CR 83.035, N-1659
Heat-shrinkable tubing	N-1325, TDS 78-20
Heat sinks	
Earth	N-1261
Ice thickening	R-845
Heat transfer	
Air conditioning condensers	CR 76.004
Buildings	CR 77.015
Insulation	CR 78.006
RTG systems	N-1359
Heavy-duty hydraulic rock drill	R-862
Heavy metal contaminants	N-1490
Heavy shale oil	TDS 78-15
Helicopter landing pads	N-1275
Hi-Dro Cushion fendering system	N-1380
High flotation tires, polar areas	N-1405, N-1422
High pressure vessels	R-794
High voltage cables, underground	N-1506
High security padlocks	N-1567
Hinge joint base, towers	N-1461
Holiday detectors	TDS 78-38
Holographic interferometry	N-1350
Horizontal construction	CR 79.001
Horizontally buried cylinders	R-816
Hose line, fuel transport	R-814, N-1582, N-1585
Hose reel, portable	R-804
Hoses	
Ship to shore	N-1404, TDS 77-17
Steam	N-1495
Wastewater transfer	N-1354

Hospitals		
Conductive flooring	N-1289	
Electrical safety	N-1273	
Electromagnetic shielding	N-1401, R-876	
Grounding floors	N-1458	
Physical security	CR 80.010	
Hot water lines, piers and wharves	TDS 79-08	
Hot water radiation/convection system	TDS 78-46	
Hot water systems	TDS 75-01	
Hot water use, BEQ	N-1387	
Hot weather operation, fuel handling	CR 81.024	
Housing		
FRP sandwich panels	N-1399	
Insulation	TDS 78-53	
Solid waste collection/sorting	N-1497, N-1507	
Hulls, concrete	R-785, R-790	
Hush houses		
Aircraft testing	N-1651, N-1665	
Thermal energy recovery	N-1679	
HVAC control strategies	N-1658	
HVAC, EMCS-control	CR 83.021	
HVAC heat pump	N-1673	
HVAC systems	CR 79.002	
Hydraulic		
Chain jacks	R-826	
Control systems	N-1255, N-1349, N-1419	
Heavy-duty rock drill	R-862	
Pressure intensifiers	N-1342	
Quick disconnects for tools	N-1361	
Seawater motor	CR 80.015	
Underwater bandsaw	R-849	
Underwater tools	N-1358, R-801, TOS 77-01	
Underwater rock drill	R-824	
Hydraulic equipment, seawater	R-895, CR 82.026	
Hydraulic motor, seawater	CR 82.025	
Hydrazine gas-generation system	R-800	
Hydroacoustic pile driver	N-1362	
Hydrocarbon fuel handling	N-1378	
Hydrogen sulfide	N-1263	
Hydromechanics, moorings	N-1633	
Hydrophone, support structure	N-1267	
Hydrospace simulation	CR 73.009	
Hydrostatic anchor	CR 74.005	
Hydrostatic loading		
Concrete	R-874	
Hulls	R-785, R-790	
Hyperbaric chambers	N-1272, N-1294, N-1469	
Ice		
Aircraft loadings	N-1431	
Anchor	N-1344	
Elastic properties	N-1417	
Engineering (state of the art)	R-803	
Excavation	N-1415, R-851	
Heat sink	N-1306	
Runways	CR 79.016	
Subsurface thickening	R-811	
Wharf	N-1376	
Illuminance	CR 81.026	
Illumination		
Design handbook	CR 79.015	
Level control	N-1486, N-1558, TOS 76-09, TOS 76-11, TOS 80-10	
Offices	R-880	
Skylights	CR 82.022	
Windows	CR 83.038	
Implosion pressure, hulls	R-790	
Immobilized cables	TOS 75-07, TOS 75-12	
Impulse voltage suppressors	TDS 76-01	
Incinerators		
Air curtain	N-1398	
Classified material	N-1332, R-840, TOS 74-04	
Controlled air	CR 77.008	
Heat recovery	CR 77.009, CR 79.003, CR 82.029, CR 82.032, CR 82.033, CR 83.016, CR 83.017, CR 83.025, CR 83.028, CR 83.034, CR 83.035, N-1659	
Inertial properties, equipment	N-1254	
Inflatable bow ramp	CR 74.002	
Infrared beating	N-1684	
Infrared thermal imaging system	TDS 79-02	
Infrared temperature monitoring, antennas	N-1459	
Inorganic coatings, zinc-rich	TDS 72-04	
INSLAB computer program	TOS 78-09	
In-situ strength, seafloor soils	N-1295	
Inspection		
Corrosion	TDS 76-13	
Painting	TDS 79-09	
Deep ocean objects	N-1424	
Fleet moorings	N-1557	
Installations, seafloor	TDS 75-09	
Instrumentation		
Energy survey package	TDS 79-02	
Seafloor	TDS 75-09	
Insulating boards, electrical	TDS 75-20	
Insulation		
Asbestos	N-1591, R-883, R-884	
Built-up roofs	N-1600	
Concrete walls	N-1574	
Electrical cables	N-1477	
Energy loss	CR 80.012	
Housing	TOS 78-53, TOS 79-02, TDS 79-03	
Material characteristics	CR 80.001	
Polyurethane foam	N-1656	
Polyurethane foam roofs	N-1643	
Steam and hot water lines	TDS 79-08	
Thermal conductivity	N-1302	
Insulation materials, design guidelines	CR 83.005	
Insulators		
Antenna	N-1459, R-839	
Configurations	N-1502	
Guyed tower	N-1442	
Station post	N-1427, N-1430	
VLF antennas	CR 75.001, CR 81.020	
Intelligent time clocks	N-1588	
Intensifiers, hydraulic pressure	N-1342	
Interior lighting systems, design	CR 83.009	
Intermodal ISO containers	N-1670	
ISO containers, connectors	N-1670	
Jet engine test cells, energy recovery	N-1679	
Jet exhaust flow control	N-1410	
JP-5 aviation fuel	N-1333	
JP-5 fuel reclamation	N-1481	
Kinking, electromechanical cables	N-1403	
Ladder-type trencher	R-851	
Land anchors	N-1660	
Landfill, solid waste	N-1451, CR 81.017, CR 81.018, CR 81.019	
Landing mat, V/STOL aircraft	N-1410	
Land locomotion	N-1292	
Land management	CR 79.001	
Landspreading, solid waste	N-1471	
LaPlase's equations	N-1549	
Large Object Salvage System (LOSS)	R-800	
LASH anchor transport	N-1587	
Laser-based measurements, antennas	N-1524	
Laser control, earthmovers	CR 81.015	
Lasers, motion measurement	R-887	
Latent heat, energy storage	CR 82.034	
Latex enamels	N-1326, TDS 77-19	
Latex-modified concrete	TOS 78-01	
Laundry/Shower Module	N-1547	
Layered compaction snow roads	R-819	
Leachate production	TDS 74-09	
Lead-acid batteries	N-1526	
Lead-based paints	N-1455, N-1533, TDS 77-04	
Lead-free primer	TOS 77-14	
Leak detection, utility lines	TOS 75-23	
Life cycle costs, airfield pavements	CR 82.011	
Lift system, elevated causeway	R-826	
Lighterage motions, elevated causeway	R-852-1V	

Lighting		
Buildings	CR 83.038	
Energy analysis	CR 81.026	
Piers	CR 83.032	
Skylights	CR 82.022	
Lights		
Automatic control	N-1486	
Construction sites	N-1274	
Design handbook	CR 79.015	
Energy conservation	N-1486, N-1558, TDS 78-02, TDS 80-01, TDS 80-05, TDS 80-07, TDS 80-08, TDS 80-09, TDS 80-10, R-880	
Hyperbaric/hypobaric chambers	N-1469	
Lower wattage	TDS 77-11	
Offices	R-880	
Lightweight concrete	N-1565	
Time-stabilized soil	N-1609	
Lineal pipeline inspection system	N-1400	
Liners, fuel storage tanks	CR 80.014	
Liquefaction		
Earthquakes	N-1530	
Soil	R-847, N-1566	
Liquid film smoke scrubber	N-1268	
Liquid oxygen supply	N-1377	
Load cyclers/optimizers	TDS 77-15	
Load handling	N-1619	
Load-handling		
Motion compensation	N-1621	
Ocean operations	N-1313, R-829	
Load-matching system, wind generators	N-1485	
Load transfer systems, ships	N-1257	
LOSTER, scafford monitoring	R-775	
Locking devices	N-1559, TDS 76-14, TDS 77-07, N-1567	
Logistics, containerization	R-904, R-906	
Longshore transport rate	N-1626	
Low voltage switchgear	N-1309	
LST inflatable bow ramp	CR 74.002	
Lubricant reclamation	N-1481	
Magazine doors	R-901	
Magazines		
Concrete arch	N-1394	
Earth-covered box	R-889	
Nuclear weapons	N-1559	
Physical security	CR 80.017	
Magnesium alloys, supercorroding	N-1550	
Magromover	N-1408, TDS 76-06	
Maintenance		
Airfield pavements	CR 82.011	
Pier fenders	CR 80.004	
Waterfront structures	CR 81.009	
Maintenance shelter, portable	N-1395	
Management, solid waste	CR 73.012	
Management system, physical security	CR 80.013	
MARCORPS laundry/shower module	N-1547	
Marine borer inhibitors	R-850	
Marine borers, pilings	N-1672	
Marine cables	N-1608	
Marine concrete, antifouling	N-1392	
Marine construction	N-1514	
Marine Corps, water supply	N-1637	
Marine installation, pipelines	CR 81.016	
Marine organisms, borers	N-1253, TDS 73-16, TDS 74-07, TDS 74-12, TDS 75-02, TDS 78-50, TDS 79-07	
Marine piling	N-1418, N-1466, N-1505, N-1535, N-1538, TDS 79-07	
Marine sediments, in-place strength	N-1438	
Marines, solid waste disposal	CR 78.015	
Maritime van containers	N-1313	
Marking paints, airfields	TDS 79-05	
Masonry	N-1478, TDS 79-04, TDS 77-16	
Material damping	N-1612	
Materials		
Biodeterioration and fouling	N-1263, R-810	
Deep ocean inspection	N-1424	
Ship handling	N-1257	
Mathematical-theory, finite element	N-1552	
McMurdo ice wharf	N-1376	
Mechanical destructors	TDS 74-04	
Mechanized collection systems	CR 76.001	
MEPS-multipurpose expedient paving system	N-1553	
Mercury vapor lights	TDS 80-01	
Metal corrosion, ocean	R-834	
Metal hydride heat pump		
Energy storage	N-1393	
Heat pump	N-1492	
Metal oxide resistors	TDS 76-01	
Metal sheeting, conductive flooring	R-872	
Methane gas, waste heat recovery	N-1642	
Microcomputers	TDS 77-15	
Micro EMCS	CR 82.028	
Microprocessors	N-1558, N-1588	
Mildew, Naval facilities	N-1647	
Mindlin plate theory	CR 81.006	
Mixer, concrete	N-1357	
Mobile laboratory, data collection	N-1620	
Mobile monitoring facility	TDS 78-14	
Mobile ocean basing system	N-1297	
Modular boiler system	TDS 78-41	
Modular floor system	R-841, TDS 76-02	
Moisture migration, buildings	CR 83.006	
Monitor program, South Pole Station	N-1320	
Monitoring and control systems	TDS 76-12	
Mooring analysis, SEADYN computer program	N-1630	
Moorings	N-1667	
Moorings		
Anchors	N-1581, N-1587, N-1592	
Cables dynamics	CR 80.018, CR 80.019	
Cathodic protection	TDS 73-09	
Computer validation	CR 82.015	
Current forces	N-1633, N-1662	
Deployment	CR 81.023	
Diego Garcia	N-1638	
Drag embedment anchors	N-1635	
Embedment anchors	R-888	
Modular system	N-1520	
OTEC system	N-1463, R-853, R-859	
Plate anchors	R-882	
Propellant-actuated anchor	TDS 75-16, N-1595	
SEADYN mathematical models	CR 82.019	
SEADYN programmer's manual	CR 82.018	
Seafloor fasteners	TDS 75-12	
Seminar	N-1604, N-1681	
STATMOOR computer program	N-1634	
Submerged systems	R-815	
Tankers	N-1446	
Underwater inspection	N-1557	
Vibratory anchor	TDS 75-11	
Wind forces	N-1628	
Morison equation, ocean forces	CR 80.022	
Motion compensating lift system	R-829	
Motion compensation	N-1621	
Motion compensation, barges	N-1668	
Motors		
Aluminum frame	N-1464	
Seawater hydraulic	R-895, CR 80.015	
Multistage flash distillation unit	N-1285	
Multi-tap connectors, electrical	N-1316	
Multiterrain platforms	N-1275	
Munition facilities		
Blast cells	R-823, TDS 76-15	
Conductive flooring	R-872	
Munitions, transportation	CR 79.010	
Nansen Drift Station	R-865	
Natural convection heat exchangers	R-811	
Natural fiber ropes, antifouling agents	N-1423	
Naval BEQ's, vandalism	CR 78-13, CR 78.016, CR 78.017, CR 78.021	
Navy distillate fuel	N-1353, TDS 73-17	
Navy housing, lead-based paint	N-1533	
Navy special fuel oil	TDS 73-17	
Nearshore underwater explosive excavation	R-843	

Nearshore electrical cables	N-1428	Ordnance	
NEMO (acrylic-hulled submersible)	R-778	Inadvertent explosions	CR 79.010
Newton-Lanczos method	CR 82.012	Soil/groundwater contamination	N-1488
Night setback, energy calculations	TDS 78-42	Organic coatings	N-1411, TDS 72-04
Nitrogen oxide emissions	TDS 78-15	Organotin paints, fungal-resistant	N-1480
Nomograph, paints	TDS 76-03	Organotin resins, fungal-resistant	N-1439
Nondestructive measurement, lasers	R-887	Oscillating cables	CR 79.006, CR 79.007, CR 79.008, CR 79.009
Nondestructive testing		OSDOC II	N-1258
Underwater inspection	R-903	OTEC facility	
Waterfront facilities	N-1632	Anchors	R-859
Waterfront structures	N-1624	Antifouling concrete	N-1573
Wire rope	N-1639, N-1657, N-1661	Concrete housing	N-1448
Nonferrous heat exchangers	N-1560	Mooring system	N-1463, R-853
Nonlinear algebraic equations	CR 83.027	Plants	R-868
Nonlinear finite element analysis, arch rib	N-1652	Outfalls, sewage	N-1396
Nonlinear finite element equations	CR 81.007, CR 82.012	OVER computer program	TDS 78-10
Nontoxic coating	TDS 77-14	Over-rust primers	N-1382, TDS 78-39
Nuclear shock wave propagation	R-820		
Nuclear test data	R-808, R-808S	Pacific Cratering experiments	R-808, R-808S
Nuclear weapons storage	N-1559	Packaged heating and cooling system	TDS 78-44
Numerical solution methods	CR 82.012, CR 83.027	Padlocks	TDS 76-08, TDS 76-14, TDS 77-07, N-1567
Nut splitters, underwater	N-1483, TDS 77-05	Paint driers, adsorption	N-1551
		Paints	
Ocean-bottom trencher	R-890	Airfields	N-1539, TDS 79-05
Ocean bottom vehicle	N-1646	Airless spray guns	TDS 79-01
Ocean construction		Algal growth	R-802, TDS 73-20
Concrete placement	N-1544	Antifouling	N-1474
Connectors	R-875	Automobiles	N-1265
Moorings	N-1520	Contracts	TDS 74-01
Ocean currents, measurement	R-893, N-1564	Estimating quantities	TDS 76-03
Ocean engineering		Exterior, repair	TDS 80-06
Cables	CR 79.006, CR 79.007, CR 79.008, CR 79.009, N-1608	Field identification	TDS 72-03
Fluid mechanics	CR 82.010	Film thickness gages	TDS 74-11
Supercorrodng alloys	N-1550	Free-film test	R-827
Ocean forces, Morison equation	CR 80.022	Fuel lines	TDS 75-26
Oceanic cable systems, computer program	N-1619	Guy lines	TDS 72-01
Ocean platforms, seminar	N-1681	Holiday detection	TDS 78-38
Ocean, sewage bacteria	N-1396	Incompatibility	TDS 77-19
Ocean simulation vessels	R-794	Identification	TDS 72-03
Ocean structures		Inspection	TDS 79-09
Cables	CR 81.005	Latex enamels	N-1326
Concrete	N-1448, R-869	Lead-based	N-1455, N-1535, TDS 77-04
Ocean waves, offshore structures	CR 82.008	Magnetic pigmentation	N-1260
Ocean work vehicle	N-1540	Maintenance	N-1379, N-1379S
Offices, lighting	R-880	Masonry walls	TDS 75-31
Offshore discharge, containerahips	N-1381	Mildew	N-1647
Offshore platforms, seminar	N-1681	Organotin	N-1480
Offshore structures, wave forces	CR 82.008	Over-rust primers	N-1382
Oil-base paints	TDS 77-19	Performance prediction	N-1412
Oil-fired boilers	CR 77.013, CR 77.014, CR 79.005, CR 79.012	Programmed	TDS 79-10
Oil clesners	TDS 73-17	Salt ions	N-1373
Oil, coal substitution	CR 79.005	Slurry seal stripes	R-792
Oil-fired boilers	N-1580	Spray	TDS 73-19
Oil in water		Steel pontoons	TDS 75-05
Content analysis	N-1541	Steel sheet pilings	N-1277
Monitoring system	CR 73.014	Steel structures	TDS 72-04
Oil reclamation	N-1481	Swimming pools	TDS 77-10
Oil spills		Temperature-indicating	N-1651
Contaminated beaches	N-1337, TDS 74-13	Tropical environments	TDS 77-18
Containment booms	N-1343, N-1440	Water tanks	TDS 77-09, TDS 73-11
Ground pollution	N-1322	Wooden piles	TDS 74-07, TDS 74-12
Harbors	N-1443	PALCON containers	N-1614
Recovery systems	N-1293, N-1330, N-1372, N-1476	Palletization	N-1614
Oils, waste	TDS 80-04	Partially vented explosions, cubicles	R-828
Oil tankers, leakproofing	N-1252, N-1252S	Passive solar design	R-877, N-1598, CR 82.002, CR 82.003, CR 82.004, CR 82.005, CR 82.006, CR 83.040
Oil-water aspirators	CR 73.015, N-1331, N-1389	Passive solar energy	CR 82.007
Oily wastewater treatment system	CR 74.008	Pavement rehabilitation, airfields	CR 82.011
On-offshore sediment transport	N-1649	Pavements	
OPTIREC computer program	TDS 78-30	Airfields	N-1271, R-871, N-1553, N-1610
Ordnance facilities		Airport	N-1561S
Conductive flooring	N-1289, N-1470	Asphaltic	TDS 76-07, TDS 73-18
Concrete slab structures	N-1494	FRP panels	N-1676
Grounding floors	N-1458	Light aircraft	N-1609
Physical security	CR 80.009		
Protective structures	R-780		

Pavements (continued)

Roughness TDS 76-07
Runway repair N-1572, N-1631
Void detection N-1449
Pelagic clay, engineering properties N-1296
Penetrometer
Doppler principle N-1435
Seafloor soils R-855, TDS 77-13
Permafrost
Anchors N-1344
Foundation systems R-870
Permeation of salt ions, paints N-1373
Personnel/cargo carrier, polar areas TDS 73-03,
TDS 73-04
Personnel/cargo van, polar areas TDS 73-05
Personnel health, asbestos R-883, R-900
Phantom fluorescent lamps TDS 76-11
Photocells, lighting TDS 80-07, TDS 80-08
Photoelastic analysis R-842
Physical security CR 78.002, N-1425, N-1508,
N-1510, N-1536, N-1559, TDS 76-08,
TDS 76-14, TDS 77-04, TDS 78-40,
CR 80.007, CR 80.008, CR 80.010,
CR 80.013, CR 80.009, CR 81.002,
CR 80.017, CR 80.025, TDS 80-02,
N-1567
Physical security
Facility design N-1629
Magazine doors R-901
Planning procedures CR 81.022
Pier fenders CR 80.004
Piers
Design concepts CR 83.007
Elevated causeway R-852-11, 111
Floating CR 82.031, CR 83.030
Floating concrete N-1447
Fuel lines N-1311, N-1420, R-832
Piling preservative TDS 79-07
Repair TDS 77-11, TDS 80-12
Scour jets N-1589
Steam/hot water lines TDS 79-08
Utilities and lighting CR 83.032
Utility lines R-857
Pile driver, hydroacoustic N-1362
Piles, calcareous sediments CR 83.020
Pillings
Emplacement N-1286
Length measurement N-1475
Marine N-1535, N-1538, TDS 79-07,
TDS 80-12
Steel sheet N-1277
Underwater cutter TDS 77-11
Wooden N-1253, N-1298, N-1418
N-1466, N-1505
Wood preservatives N-1672
Pigments, paint driers N-1551
Pipelines
Fuel N-1420
Inspection (POL) N-1400
Marine installation CR 81.016
Split-pipe protection CR 78.007
Submerged R-844
Trenching N-1335, N-1521
Underground R-789
Pipes, asbestos insulation R-884
Pitched roofs, skylights CR 82.022
Plastic-coated rigid electrical conduits R-821
Plasticity, soil mechanics CR 82.013
Plastics
Adhesive TDS 75-10
Buried N-1402
Construction panels N-1352
Soil surfacing N-1527, CR 79.013
Submersible hulls R-778
Undersea windows N-1468
Plate anchors R-882, N-1595

Platforms

Multiterrain N-1275
Semi-submersible N-1297
Platforms (ocean), seminar N-1681
PLOT1DX, computer program TDS 78-18
PLGT3DX, computer program TDS 78-16
Plywood floors TDS 76-02, TDS 76-05
Plywood/steel walls TDS 80-02
Pneumatic fluidic elements N-1255
Pneumatic track drill N-1339, TDS 75-25
Point Mugu earthquake damage N-1307
POL
Fires CR 81.011
Logistics system N-1360
Pipelines CR 81.016
Transfer N-82, N-1585
Polar areas
Five-ton truck N-1405
Foundations on permafrost R-870
Maintenance shelter N-1395
Natural construction materials N-1406
Sea-ice runways R-865
Site preparation TDS 73-13
Sixteen-wheel LCP vehicle N-1422
Snowdrift control TDS 73-08
Snow road construction N-1305
Transient TDS 72-05
Undersnow TDS 73-10
POL distribution CR 83.024
Pollution abatement
Beaches TDS 74-13
Fuel tanks TDS 73-17
Grease traps TDS 74-08S
Incinerators TDS 74-04
Sanitary landfills TDS 74-09
Pollution control
Air N-1457
Oil N-1293
POL pipelines, inspection N-1400
POL storage, offshore CR 80.016, CR 80.024
Polymer-modified concrete N-1319, N-1479,
N-1565, TDS 78-01
Polytoroidal tunneling thruster N-1266, N-1318
Polyurethane foam roofing systems N-1450, N-1496,
CR 79.004, TDS 77-12,
N-1656, N-1683
Pontoon breakwater N-1601
Pontoon causeway N-1680
Pontoon causeways, cargo transfer N-1258
Pontoons, steel TDS 75-04, TDS 75-05
Porous friction surface runway N-1487
Portable bandsaw, underwater R-849
Portable monitor/recorder, electrical TDS 75-17
Portable powered hose reel R-804
Portland cement concrete TDS 77-20
Portland cement concrete pavements N-1610
Potable water R-898
Potable water
Desalination N-1285, N-1299, N-1370
South Pole Station N-1328
Powder-actuated tools N-1287
Powder insulations N-1302
Power
Cables, splicing TDS 78-20
Conditioning system TDS 78-52
Converter N-1575
Element, transfer impedance N-1472
Impulse voltage suppressors TDS 76-01
Line transients N-1256, N-1327, N-1388, N-1414,
TDS 75-18, TDS 75-17
Plants, underground N-1261
Sources, underwater N-1391, R-801
System simulator N-1519
Underwater transmission N-1569
Preservatives, marine piling N-1535, N-1538
Pressure-resistant structures R-874

Pressure vessel
 Fatigue testing N-1355, N-1612
 Pressure capability CR 73.009
 Prime movers TDS 73-02, TDS 76-06
 Primers
 Automobilea N-1265
 Over-rust N-1382, R-863, TDS 78-39
 Programmable controllers CR 82.028
 Programmed painting TDS 79-10
 Projectile penetration, seafloors R-822
 Propellant-actuated anchor N-1282, N-1413, N-1441,
 N-1446, R-837, N-1595,
 R-882
 Propellant-embedded anchors
 Cables N-1648
 Coral/rock seafloors R-882S
 Propellant embedment anchors N-1638
 Protective coatings
 Antenna towers N-1562
 Exterior, repair TDS 80-06
 Fences TDS 76-16
 Fuel linea TDS 75-26, R-832
 Guy lines TDS 72-01, TDS 76-04
 Heat exchangers N-1560
 Inspection TDS 79-09
 Roofs TDS 77-12
 Steel pontoons TDS 75-05
 Steel structures TDS 72-04
 Surface preparation TDS 79-04
 Swimming pool TDS 77-10
 Tropical environments TDS 77-18
 Water tanks TDS 77-09, TDS 73-11
 Wood piles TDS 74-12
 Protective coverings, polar areas TDS 73-12
 Protective films, amino compounds N-1259
 Protective shielding, combat N-1509, R-807
 Protective structures
 Buried R-793, R-833
 Cubicles R-780
 Explosives R-889
 GRP laminate R-818
 Protective wrapping, piers TDS 75-26
 Pulse voltage transient suppressors N-1312
 Pulverizer, classified material R-840
 Pump control, POL N-1645
 Pumps, fuel transfer N-1582, N-1585
 PVC barriers TDS 74-12
 QUADCON containers N-1614
 Quarry tile, maintenance TDS 75-22
 Quick Camp N-1369, R-796
 Quick disconnects, underwater tools N-1361
 Radiant heaters N-1684
 Radiosotope thermoelectric generator N-1304, N-1359
 Radiosotope tracer, paint driers N-1551
 Railroad boxcars, heat alarm N-1512
 Ramps
 Inflatable CR 74.002
 Transition areas (polar) N-1317
 Ramp supports, piers CR 83.030
 Ram tensioner, motion compensation N-1621
 Rapid-hardening concrete N-1300
 RDF-coal fired boilers CR 83.029
 RDX contamination N-1488
 RDX slurry charges N-1390
 RECUR computer program TDS 78-37
 Recycling
 Asphalt concrete R-871
 Pavement N-1610
 Solid waste CR 81.014
 Reflective floor finishes N-1482
 Refrigeration, desalination CR 80.011
 Refuse derived fuels CR 82.001, CR 83.029, CR 83.033
 Refuse handling CR 73.010-1, 11, CR 73.011
 CR 76.001, N-1497, N-1507, TDS 74-09

Reinforced concrete
 Blast loading of slabs N-1424
 Epoxy resin repair N-1429
 Floating structures TDS 77-03
 Lined tunnels N-1433
 Slabs TDS 76-15, CR 80.026, CR 80.027,
 CR 80.028
 Reinforced mortar barriers TDS 75-02
 Reinforced plastics N-1352, N-1572
 Reinforced plastics, runways R-902
 Relocatable floors R-841
 Relockers, propellant-driven N-1559
 Remotely controlled seafloor corer N-1462
 Remote site power generation N-1655
 Repair, concrete N-1300
 Resaturant-coated roofs CR 83.031
 RESPLOT computer program TDS 78-28
 Reverse osmosis R-898
 Reverse osmosis
 Desalination N-1299
 Water treatment N-1644
 Reverse osmosis systems, cleaning CR 78.010
 Roads
 Asphaltic TDS 73-18
 Ice-constructed TDS 75-02
 Snow-constructed N-1405, R-831, TDS 74-06,
 TDS 74-05, TDS 74-10, TDS 72-06,
 TDS 73-14, TDS 73-07, TDS 75-21
 Synthetic surfacing N-1346
 Rock bolts R-824, R-897, TDS 75-12, N-1571
 Rock drill, underwater R-862
 Rocks
 Deformation behavior R-788
 Spalling N-1432
 Tunneling N-1511
 Rock seafloors, anchors R-882S
 Roofing
 Bituminous coatings CR 83.031
 Polyurethane foam N-1450, N-1496, N-1600,
 CR 79.004
 Roofs
 Downspouts TDS 80-03
 Polyurethane foam N-1643, N-1683
 Skylights CR 82.022
 Sprayed polyurethane foam N-1656
 Ropes, antifouling agents N-1423
 Rototillers, landspreading N-1471
 Rubber removal, runways N-1356
 Running gear module N-1540
 Runways
 Asphalt TDS 75-19
 Concrete N-1561
 Defects N-1271
 Expeditionary N-1578
 FARP membranes R-902
 Marking paints N-1539
 Porous friction surface N-1487
 Rapid repair N-1676, R-902
 Repair N-1563, N-1572, N-1631, TDS 75-19
 Rubber removal N-1356, TDS 75-19
 Recycling pavement R-871
 Roughness R-846, TDS 76-07
 Sea ice N-1431, R-865
 Snow TDS 73-01
 Rust-arresting coatings TDS 78-51
 Rust converters TDS 78-51
 Rust removers N-1531, TDS 77-06
 R-values, buildings CR 77.015
 Safety
 Asbestos R-900
 Polyurethane foam roofing N-1683
 SAKE computer program TDS 78-34
 Saline ice behavior R-797
 Salvage
 Buoyancy devices N-1269, N-1345
 Large objects R-800
 Operations N-1262, TDS 75-14

Sand (beach), chemical binders	N-1546	Seawater (continued)	
San Diego Naval Hospital, earthquake analysis	R-795	Desalination plant	N-1299
Sand stabilization	N-1546	Hydraulic motor	CR 80.015
Sanitary landfills	N-1451, TDS 74-09	Hydraulic tool system	CR 82.025, CR 82.026
Sanitary landfill, waste heat recovery	N-1642	Oil content analysis	N-1541
Scale control, heat exchangers	N-1340	Supercorroding alloys	N-1550
Scour jet arrays	R-899	Tool motors	CR 78.012
Screw-piles	N-1286	Seawater hydraulics, diver equipment	R-895
Scuba divers, self-contained heater	N-1501	Secure spaces, emergency exiting	N-1536
SD coaxial cables	N-1537	Security engineering	CR 81.022
SDOOR computer program	TDS 78-06	Security, physical	N-1559, TDS 76-08R, TDS 76-14, CR 81.002, TDS 77-07, TDS 78-40, CR 80.008, CR 80.007, 80.010,
Seabees		Sedimentation control	N-1589
Construction sites	N-1274	Sediment excavation, underwater	N-1677
Quick Camp System	R-796	Sediment transport	N-1626, N-1649
Sea Cache	N-1360	Seismic	
SEACON I	R-817	Design	N-1579, N-1671
SEACON II	R-848	Liquefaction, soil	N-1530, N-1555, N-1566
SEADYN		Loading	R-867
Cable dynamics	CR 82.015	Risk analysis	R-885
Computer program	CR 80.018, CR 81.023, CR 82.014	Seismic design, economic analysis	N-1640
Programmer's reference manual	CR 82.018	Self-contained diver heater	N-1501
SEADYN computer model	CR 82.019	Sewage	
SEADYN post-processor	CR 82.016	Bacteria survival	N-1396
SEADYN user manual, computer program	N-1630	Hoses	N-1404
Seafloor Construction Experiment	R-817, R-848	Ship-to-shore transfer	N-1354
Seafloor fastener	N-1682	Sewell's Point Naval Complex	N-1623
Seafloor fasteners		Sewer outfalls	CR 81.016
Grouting	N-1347	Sewer system, vacuum activated	N-1554
Rock bolts	R-824	SF6 tracer gas, utility lines	TDS 75-23
Rock drill	R-862	SHAKE computer program	TDS 78-33
Seafloors		Sheet piles, in-situ length	N-1475
Acoustic profiling	N-1513	Shelters, containerizations	R-904
Anchor embedment	N-1491, N-1489, N-1581	Shielding	N-1617
Cable systems	N-1453	Ship cables, splicing	TDS 78-20
Cohesive soils	TDS 75-14	Ship motion modeling	N-1371
Contour mapping	R-813	Ships	
Coring	N-1462	Cargo transfer	N-1257
Engineering properties of soils	N-1283, N-1295	Current-induced forces	N-1662
Facilities	R-875	Current loads	N-1633
Fasteners	TDS 75-12, TDS 75-13	Wind forces	N-1628
Foundations	N-1281, R-775, R-799	Ship salvage, cryogenic liquids	N-1269
Hydrogen sulfide sediments	N-1263	Ship steam boilers	N-1586
In-situ construction	N-1544	Ship-to-Shore	
Instrumentation	TDS 75-28	Electrical cables	N-1421, N-1477
Long-term settlement	TDS 75-09	Hoses	N-1404
Nut splitter	TDS 77-05	LP steam hoses	N-1495
Partially embedded objects	TDS 75-14	Splicing of cables	N-1503
Pelagic clay	N-1296	Wastewater transfer	N-1354
Penetrometer analysis	N-1435, R-855	Shock data analysis	N-1590
Pile cutter	TDS 77-11	Shock (mechanics)	N-1622
Preconsolidated footings	N-1276	Shower heads	TDS 76-10
Projectiles	R-822	Shower/laundry module	N-1547
Soil sampling	N-1295, N-1438, R-873, TDS 77-13	Shrinkage-compensating concrete	N-1264, N-1504, N-1561, N-1561S, N-1574
Soil stresses	N-1515	Silicone caulking compounds	R-812
Seafloor soils, anchors	N-1635	SIMQKE computer program	TDS 78-27
Seafloor storage of POL	N-1360	Simulation, mooring	N-1604
Sea ice		Simulators, ocean environments	R-794
Analysis	R-803	SINGER computer program	TDS 78-05
Behavior	R-797	Single building energy controllers	N-1678, CR 83.037
Removal	N-1416	Single-point moorings, STATMOOR computer program	N-1634
Runways	N-1431, R-865	Site motion, earthquakes	R-867
Sheets	R-860	Site preparation, polar areas	TDS 73-13
Specimens	N-1417	Site selection	R-873
Strain transducers	N-1310	Site surveying, underwater	N-1323, R-799
Structural analysis	CR 79.016	Site surveys	
Thickening	R-811, R-845	Earthquake	R-885
Sea/lake water cooling	N-1528, N-1577	Underwater tools	R-892
Sealing compounds		SIXCON	CR 83.024
Concrete	TDS 77-02	SIXCON modules, fuel	N-1445
Polar areas	TDS 75-03	Skimmers, oil	N-1330
SEAPLT, graphics post-processor	CR 82.016	Skiways	TDS 73-01
Seawater		Skylights	TDS 80-07, TDS 80-09
Concrete absorption	N-1436	Skylights, pitched roofs	CR 82.022
Cooling system	CR 78.008, CR 78.009, CR 79.011	Slurry seals, asphaltic	R-792
Corrosion	N-1267		

Small arms, physical security	CR 80.025	Solid waste (continued)	
SMLS support requirements	N-1386	Management	CR 73.012, TDS 74-09, R-881
Smoke detection, hyperbaric chamber	N-1294	Processing	CR 82.001
Smoke scrubber	N-1268	Refuse-derived fuel	CR 83.029, CR 83.033
SNAPLOAD		Separation	N-1507
Cable dynamics	CR 82.015	Transfer/resource recovery station	CR 77.011
Computer program	CR 80.019, CR 81.023	Solvent recovery systems	CR 77.012
Snow anchors	N-1344	Sonar, positioning loads on seafloor	R-787
Snow-compaction equipment		Sorbent oil recovery system	N-1478
Drags	TDS 74-06	Source separation, solid waste	N-1507
Planes	TDS 74-05	South Pole Station	N-1320, N-1328
Rollers	TDS 72-06	SPECEQ computer program	TDS 78-31
Snowplows	TDS 74-10	SPECTR computer program	TDS 78-32
Tractors	TDS 73-14	Spherical structures, concrete	R-805, R-869
Snow drags	TDS 74-06	Spills, oil	N-1440, N-1443, N-1476
Snowdrift control	TDS 73-01, TDS 73-08	Splice covers	
Snow mechanics	N-1324	Cables	N-1503
Snow planes	TDS 74-05	Shrinkable	TDS 74-03
Snow plow	TDS 74-10	Splicing, distribution cables	N-1325
Snow road construction	N-1305, R-819, R-831	Split-pipe-protected cables	N-1498, N-1525,
Snow rollers	TDS 72-06		CR 78.007, N-1571
Snow tractor	TDS 73-14	Split pipe systems, underwater	R-897
Snow trails	TDS 73-07	SPM buoy	N-1667
Sodium lighting systems	TDS 78-02, TDS 80-01	Spray guns, airless	TDS 79-01
Sodium sulfide test	TDS 77-04	Spreader bar, container handling	N-1381
Soil constitutive models	CR 81.008, CR 82.013	Spreading rates, paints	TDS 76-03
Soil mechanics, anchors	N-1660	Spread moorings	N-1520
Soils		Spring-mass systems	N-1669
Arching	R-793	Spudwells, causeways	R-852-111
Cohesive	N-1545	Stabilization systems	
Covers, ammunition magazines	R-878	Cables	R-897
Deep ocean samples	N-1283	Soil	N-1279
Liquefaction	R-847, N-1555, N-1566	Underwater	N-1571
Pelagic clay	N-1296	Stack gas scrubbers	CR 80.023
Penetrometer analysis	N-1435	Stainless steel flake-pigmented coatings	N-1278, R-836
RDX contamination	N-1488	Statically loaded anchors	N-1545
Seafloor	N-1515, R-873	Static charge reducer	N-1378
Stabilization systems	N-1279	Station post insulators	N-1427, N-1430
Surfacing	CR 73.007, CR 77.017,	Station wagon/light-cargo vehicle	TDS 73-06
	CR 78.018, N-1280, N-1346,	STATMOOR, single-point mooring	N-1634
	N-1472, N-1527, CR 79-013	STATO anchor	N-1592
Soil/rock interface, analysis	R-838	Steam/electric generating plants	R-864
Soil/structure interaction	R-816, R-856	Steam generation, solid wastes	N-1465
Solar air conditioning	CR 77.018	Steam heat, energy controller	N-1663
Solar collectors	N-1517	Steam hoses, ship-to-shore	N-1495, TDS 77-17
Solar energy		Steam lines, piers and wharves	TDS 79-08
Conversion	N-1534	Steam plants, solid waste	CR 80.002, CR 80.005
Heat exchanger	N-1599	Steam radiation/convection system	TDS 78-45
Thermal stratification	CR 78.011	Steam separator	N-1586
Solar heating	R-835, R-877, CR 78.003,	Steel bar reinforced concrete spheres	N-1364
	CR 82.002, CR 82.003, CR 82.004,	Steel	
	CR 82.005, CR 82.006	Buried cylinders	R-809
Solar heating, passive	CR 82.007	Cables, nondestructive testing	N-1594, N-1639
Solar, passive	CR 83.040	Cathodic protection	TDS 73-09
Solar-powered sun tracker	N-1556	Coatings	N-1260, N-1290, N-1412,
Solar radiation	TDS 73-12		R-776, R-784, R-786
Solar systems, computer programs	TDS 79-06	Epoxy coatings	N-1374
Solid-state circuit breakers	N-1375	Fuel conduit	N-1420
Solid state fluorescent ballasts	N-1675	Holiday detection	TDS 78-38
Solid state transformer	N-1575	Over-rust primers	R-863, TDS 78-39
Solid waste		Protective coatings	N-1259, TDS 72-04
Burning	N-1465	Roofing	CR 79.004
Collection	N-1497	Rust-arresting coatings	TDS 78-51
Composition	CR 73.011	Rust converters	TDS 78-51
Disposal	N-1471, CR 78.015	Rust removers	N-1531, TDS 77-06
Disposal sites	CR 81.017, CR 81.018,	Sheet piling coatings	N-1277
	CR 81.019	Surface preparation	TDS 79-04
Energy conversion	CR 77.009, CR 80.002,	Ultrasonic inspection	TDS 80-12
	CR 80.005	Underwater-applied coatings	N-1426
Handling	CR 73.010-1, 11, N-1398,	Urethane foams	TDS 75-04
	R-858, CR 80.003	Water emulsion epoxies	N-1290
Heat recovery incinerator	CR 79.003, CR 81.012,	Water tanks	TDS 77-09, TDS 73-11
	CR 83.025, CR 83.028,	Steel cable testing	N-1657, N-1661
	CR 83.034, CR 83.035, N-1659	Steel-lined tunnels	N-1433
Incineration	CR 82.029	Steel/ply wall system	TDS 80-02
Landfill	N-1451	Stereo-imagery, sonar	R-787
Laws and policies	CR 81.014	Stereoscopic mapping of seafloor	R-813

Stockless anchor	N-1581, N-1592	Tile, floor covering	N-1384
Stone (natural) waterproofing	TDS 77-16	Timber piles, cutting	TDS 77-11
Storage		Time integration operators	R-856
Energy	CR 82.034	TLMHIS, computer program	TDS 78-26
Explosives	R-878	Tires, high-flotation	
Storage tanks		Cargo/passenger van	TDS 73-05
Fuel	TDS 73-17, CR 80.014	One-ton truck	TDS 73-15
Leaking	N-1322	Stationwagon	TDS 73-06
Thermal stratification	CR 78.011	Truck-tractor/trailer	TDS 73-02
Water	TDS 73-11	Tools	
Straddle-lift vehicle	N-1270	Geotechnical site survey	R-892
Strain gages, sea-ice	N-1310	Powder-actuated	N-1287
Stress factors, station post insulators	N-1427	Seawater hydraulic	CR 82.025, CR 82.026
Structural analysis		Seawater powered	CR 78.012
Arch rib	N-1652	Total refuse advanced systems handling	R-858
Earthquakes	N-1640	Towers	
Structural mechanics	CR 83.027	Antennas, coatings	N-1562
Structural mechanics		Elastomeric bearings	N-1461
Blast loading	CR 81.010	Failsafe guy insulator assemblies	N-1442
Finite element	CR 81.006, CR 81.007, CR 81.008, CR 82.012	Guy lines	R-777
Structural modeling, computer programs		Toxic materials	TDS 73-20
GEN3D	TDS 78-17	Toxic paint	TDS 77-04, TDS 77-14
PLPT1DX	TDS 78-18	Tracked vehicles, polar areas	TDS 73-03, TDS 73-04
PLOT3DX	TDS 78-16	Tracking arrays, underwater	N-1500
Structural/stress analyses	N-1664	Trafficability, beach sand	N-1546
Structures		Training, EMCS operators	CR 82.027
Blast design	N-1669	Transducers, sea-ice	N-1310
Buried	R-793	Transfer immittance measurement	N-1473
Dynamic motion	R-887	Transformer, solid-state	N-1575
Earthquakes	N-1307, R-795	Transient protection	N-1617
Settlement	N-1276	Transients	
Strumming, cable	N-1456, N-1583, CR 81.005	Electrical	N-1256, N-1327, N-1397
Subgrade cooling system	R-870	Simulation	N-1519
Submarine cables	N-1611	Suppressors	N-1532
Submarine coaxial cable, splicing	R-891	Transition ramps, roads	N-1317
Submerged mooring systems	R-815	Transportable breakwater	N-1351, N-1529, N-1568
Submerged pipelines, wave forces	R-844	Transportation, polar	N-1406, N-1422
Submersible, NEMO	R-778	Transporter, containers	TDS 76-06
Subsea cable structures	R-848	Transpo-its, polar areas	
Subsurface ice thickening	R-811, R-845	Cargo/passenger van	TDS 73-05
Sulfur dioxide removal systems	R-864	One-ton truck	TDS 73-15
Sun tracker, solar-powered	N-1556	Stationwagon	TDS 73-06
Supercorrodng alloys	N-1550	Tracked carrier	TDS 73-03
Supplement Fuel Supply Assembly	CR 80.024	TRASH	R-858
Surfacing, soil	N-1472	Trash	
Surfzone		Composition	CR 73.011
Sediment transport	N-1649	Handling	CR 73.010-1, 11
Transition analysis	N-1646	Management	CR 73.012
Surveys, waterfront facilities	N-1632	Trencher	
Swimming pool, coatings	TDS 77-10	Ice	N-1415, N-1416, R-851
Switchgear, electrical	N-1366	Ocean bottom	R-890
Switches, lighting	TDS 80-05	Trenching	
Swivel/slipping assembly, cables	N-1383, TDS 75-28	Cables and pipelines	N-1335
Synthetic fiber ropes, antifouling	N-1423	Nearshore	N-1521
Synthetic line, material properties	CR 82.017	Ocean cables	R-886
Synthetic surfacing system	N-1346	TRIDENT drydock	N-1636
TACOSS	R-861	Trifilar pendulum method	N-1254
Tactical Container-Shelter System	R-861	Tropical location paints	R-802
Tanker moorings	N-1446	Truck-tractors, polar areas	TDS 73-02
TCDF crane, COTS system	N-1625	Tunneling	
Temperature setback control systems	TDS 78-43, TDS 78-44, TDS 78-45, TDS 78-46, TDS 78-47, TDS 78-48, TDS 78-49	Controlled stress wave	N-1511
Temporary protective shelters	R-818	Polytoroidal thruster	N-1266, N-1318
Test cell emission control	CR 74.001	Tunnels	
Theft Navy facilities	CR 78.002	Deep underground	R-833
Thermal conductivity, polyurethane foam roofs	N-1643	Finite element analysis	N-1433
Thermal current sensor	R-893	Photoelastic analysis of intersections	R-842
Thermal energy, recovery	N-1679	Ventilation (polar areas)	R-783
Thermal insulation	CR 80.001, CR 83.005	Two-fish side-scan sonar system	R-813
Thermal insulation measurement system	TDS 79-03	Type X1A tiedown	N-1615
Thermal sensor, ocean currents	N-1564	Ultrafiltration membranes, cleaning	CR 78.010
Thermostats, night setback calculations	TDS 78-42	Ultrasonic inspection, pilings	TDS 76-13, TDS 80-12
Thermostat systems, night setback	TDS 78-43, TDS 78-44, TDS 78-45, TDS 78-46, TDS 78-47, TDS 78-48, TDS 78-49	Ultrasonic testing, underwater	R-903

Underground		
Cable testing	N-1506	
Distribution cables	TDS 74-03	
Electrical systems	N-1316, N-1325, N-1452	
Pipe behavior	R-789	
Power plants	N-1261, N-1306	
Voids under pavements	N-1449	
Undersea		
Acrylic plastic windows	N-1468	
Cable structures	CR 83.004	
Communication installations	TDS 75-15	
Heat exchangers	N-1560	
Power sources	N-1391	
Radioisotope thermoelectric generator	N-1304	
Structures	R-874	
Underwater		
Adhesives	N-1367, N-1367S, TDS 75-10	
Cable connectors	R-875, TDS 80-11	
Cable immobilization	N-1525	
Cable protection	N-1498	
Cable repair	N-1437	
Cables	N-1537, TDS 77-01, TDS 75-29	
Cable splicing	R-891	
Cable structures	CR 83.004	
Cable tracking	N-1611	
Concrete repair	N-1300	
Construction	TDS 77-01	
Drilling	TDS 75-07	
Electrical power	R-896, N-1569	
Excavation	R-843, TDS 75-25	
Explosive excavation	N-1409	
Grout-dispensing system	N-1347	
Hydraulic rock drill	R-824	
Hydraulic tools	N-1358, R-801	
Hydraulic quick disconnects	N-1361	
Inspection	R-903	
Mooring inspection	N-1557	
Nut splitter	N-1483, TDS 77-05	
Paint application	N-1260	
Pile cutter	TDS 77-11	
Power transmission	N-1607	
Seawater-powered tools	CR 78.012	
Site surveying	N-1323	
Soil sampling	TDS 77-13	
Split-pipe systems	CR 78.007	
Track drill	N-1339	
Tracking arrays	N-1500	
Transport vehicle	R-779	
Ultrasonic inspection	TDS 80-12	
Wet welding	CR 77.020	
Underwater-applied antifouling paints	N-1474	
Underwater-applied coatings	N-1426	
Underwater cleaning, waterfront structures	N-1602	
Underwater construction		
Seafloor fasteners	N-1682	
Sediment excavation	N-1677	
Underwater inspection, waterfront facilities	N-1624	
Underwater repair, structures	CR 81.009	
Underwater structures, fasteners	CR 81.004	
Underwater tools, geotechnical	R-892	
Unlined tunnels	N-1433	
Urethane foams	TDS 75-04	
Utility connections, piers	CR 83.030	
Utility galleries, piers	CR 83.032	
Utility lines		
Buried	TDS 74-03, TDS 75-25	
Corrosion	R-857	
Electrical	TDS 75-27	
Fuel	TDS 75-26	
Leaking	TDS 75-23	
Monitoring	TDS 76-12, TDS 78-14	
Power	N-1312	
Steam, shore-to-ship	TDS 77-17	
Vacuum wastewater transfer	N-1554	
Vandalism	CR 78.013, CR 78.016, CR 78.017, CR 78.021, CR 79.014, TDS 80-03	
Vapor retarders, buildings	CR 83.006	
Vehicles, deep ocean	N-1540	
Ventilation		
Control systems	N-1658	
Natural cooling	N-1666	
Ventilation ducts, air blasts	N-1543	
Ventilator caps, tunnels	R-783, TDS 73-10	
Vents, physical security	CR 80.008, CR 80.017	
Vermiculating motion, tunneling	N-1266	
Vibrating cable, drag	CR 78.001	
Vibration, cables	N-1583	
Vibratory		
Anchors	R-791	
Bulldozer locomotion	N-1444	
Locomotion	N-1292	
Vinyl-asbestos tile, maintenance	TDS 75-22	
Viscoelastic finite element, sea ice	R-803	
Viscoelastic-plastic constitutive modeling	R-866	
Viscoplastic algorithm, CAP75	CR 82.021	
Viscoplastic beam element analysis	CR 82.020	
Viscoplastic CAP model	CR 83.023	
VISFIT computer program	CR 79.016	
VISICE computer program	CR 79.016	
VLF antennas and insulators	CR 81.020	
VLF antenna insulators	R-839	
VLF antenna towers	N-1524, TDS 78-19	
VLF hollow-post insulator	R-842	
Voids, underneath pavements	N-1449	
Voltage		
Fluctuations	TDS 75-17	
Impulse suppressors	N-1414	
Transients	N-1312, N-1388, TDS 75-18	
Vortex-induced motion, cables	N-1456, N-1493, N-1499	
Vortex shedding, cables	CR 83.004	
V/STOL downwash effects	N-1410	
Walls, physical security	CR 80.025, TDS 80-07	
Wanigans	TDS 72-05	
Warehouse, on-grade floors	TDS 76-05	
Waste derived fuels	CR 82.001	
Waste disposal	R-881	
Waste heat recovery	N-1616	
Waste heat recovery, methane gas	N-1642	
Waste oil	TDS 80-04, N-1570, N-1580	
Waste oils, boiler fuel	N-1618, N-1674	
Wastewater		
Reverse osmosis treatment	N-1644	
Transfer	N-1554	
Water		
Demineralized	N-1377	
Hardened wells	N-1407	
Heat sink	N-1306	
Oil content analysis	N-1541	
Potable	N-1328, TDS 77-09	
Solar heated	R-877	
Water conservation	TDS 76-10	
Water-emulsion epoxies	N-1290, N-1374	
Waterfront structures		
Concrete	TDS 77-02, TDS 74-02	
Electrical conduits	TDS 75-24	
Fuel piers	TDS 75-30S	
Pile cutter	TDS 77-11	
Seismic loadings	N-1555	
Steel pontoons	TDS 75-04, TDS 75-05	
Steel structures	TDS 75-32	
Tropical environments	TDS 77-18	
Underwater cleaning	N-1602	
Underwater inspection	R-903	
Underwater repair	CR 81.009	
Wooden piles	TDS 73-16, TDS 74-07, TDS 78-50	
Water jets	R-899	
Water-oil emulsion, boiler fuel	N-1653	
Waterproof sealers, masonry	N-1478	
Water supply		
Cold regions	N-1650	
Desert	N-1637	

Water treatment, reverse osmosis N-1644
 Water treatment system R-898
 Water vapor permeability paints N-1412
 Wave forces, Morison equation CR 80.022, CR 82.008
 Waterfront facilities
 Nondestructive testing N-1632
 Underwater inspection N-1624
 Wave modeling N-1371
 Welding (wet), electrodes CR 77.020
 Wells, water N-1407
 Wharf
 Artificial ice N-1416
 Design concepts CR 83.007
 McMurdo Station N-1376
 Steam/hot water lines TDS 79-08
 Wood preservatives N-1672
 Wind-driven electric generators N-1460, N-1485,
 N-1613, TDS 78-52
 Wind energy conversion N-1534
 Wind forces, ships N-1628
 Wind-generated electricity, WECS N-1655
 Windor Probe Test TDS 77-20
 Windows
 Acrylic plastic N-1468
 Lighting CR 83.038
 Physical security CR 80.008
 Wind power, 6-kW WECS N-1641
 Wire rope TDS 72-01, N-1594
 Wire rope
 Material properties CR 82.017
 Nondestructive testing N-1639
 Wire rope abrasion, anchors N-1648
 Wire rope testing N-1657, N-1661
 Wooden piling
 Coatings N-1253
 Deterioration N-1298
 Preservatives TDS 74-07, TDS 78-50
 Treatments CR 74.009, N-1418
 Wood preservatives, pilings N-1672
 Wood, surface preparation TDS 79-04

 Zinc primers TDS 77-19
 Zinc-rich coatings N-1291, R-784, R-776

PERSONAL AUTHOR INDEX

- Achenbach, P. R.
CR 83.006
- Albertsen, N. D.
R-790, R-815, R-848, N-1360, N-1364
- Allen, V. S.
CR 78.010
- Alumbaugh, R. L.
R-B30, N-1319, N-1352, N-1412, N-1420, N-1450, N-1479,
N-1482, N-1496, N-1533, N-1560, N-1600, N-1643, N-1656,
N-1683
- Ambruso, A.
CR 73.014
- Anderson, C. W.
N-14B1
- Anderson, L. W.
CR 79.003
- Anderson, S. J.
CR 80.006
- Ashley, J. L.
R-894, N-1673
- Ashley, S.
N-1666
- Atturio, J. M.
R-853, R-859, N-1463, N-1520, N-1587, N-1601
- Austin, S.
CR 73.007
- Backes, W. E.
N-1536
- Bailard, J. A.
R-892, R-899, N-1589, N-1626, N-1649
- Bamford, R.
CR 83.001
- Barthelemy, J. L.
R-811, R-819, R-831, R-845, R-865, R-870, N-1376
- Bathe, K. J.
CR 75.004, CR 75.005
- Baum, D. W.
CR 74.004
- Bayles, J.
N-1345, N-1585
- Beard, R. M.
R-791, R-855, R-882, R-8B2S, N-1282, N-1435, N-1463,
N-1545, N-1595
- Beck, E. J.
R-835, N-1359
- Beck, G. B.
N-1506
- Beebe, C. H.
CR 73.014
- Behn, J. D.
CR 81.011
- Benner, P.
CR 80.013
- Bergman, R. E.
N-1457, N-1620, N-1623
- Bhushan, B.
CR 78.012
- Bibbens, R. N.
N-1287
- Biehl, F. A.
CR 83.040
- Billie, R.
N-1258
- Black, S. A.
R-801, R-895, N-1315, N-1483, N-1501, N-1550
- Bliss, R. A.
R-B52-V
- Boettcher, R. A.
N-1451
- Bomar, F.
CR 83.001, CR 83.002, CR 83.003
- Bourne, J. G.
CR 80.001
- Brackett, R. L.
R-824, R-829, R-B62, R-897, R-903, N-1342, N-1347,
N-1361, N-1428, N-1498, N-1525, N-1571, N-1624
- Brackett, W. E.
CR 81.026, CR 83.009, CR 83.038
- Bradford, P.
CR 81.001
- Brady, C.
CR 78.013, CR 78.016, CR 78.017, CR 78.021
- Biennen, C. E.
CR 82.010
- Bretz, G.
N-1667, N-1668
- Brier, F. W.
N-1317, N-1320, N-1395, N-1416
- Briggs, W. D.
N-1526, N-1621
- Brill, M.
CR 78.013, CR 78.016, CR 78.017, CR 78.021
- Brisbane, A.
CR 81.005
- Broderick, J. E.
CR 80.005
- Brooks, J. L.
R-876, N-1273, N-1401, N-1458, N-1506, N-1512, N-1575
- Brouillette, C. V.
R-776, R-784, R-786, N-1259, N-1260, N-1265, N-1277,
N-1278, N-1291, N-1382
- Brownie, R. B.
R-B71, N-1472, N-1487, N-1609, N-1610
- Bruning, S.
CR 83.021
- Brunner, D. C.
N-1440, N-1476
- Buch, W.
CR 81.022
- Caldwell, J.
CR 80.013
- Campbell, F. J.
N-1343, N-1354, N-1404
- Campbell, J. A.
CR 81.011
- Camperman, J. M.
R-899
- Canfield, K. J.
N-1678
- Cannon, D. C.
N-1497
- Capps, A. G.
CR 80.002, CR 80.003
- Chan, D. B.
R-898, N-1488, N-1547
- Chapler, R. S.
N-1299, N-1332, N-1407, N-1454, N-1543, N-1570, N-1580,
N-1618
- Chatterjee, A. K.
CR 83.033
- Chaump, S. J.
CR 80.006
- Chelapati, C. V.
CR 77.010
- Chen, W. P.
CR 83.010
- Childs, K.
CR 81.009
- Ciani, J. B.
R-844, N-1323, N-1528, N-1577
- Clark, D. B.
N-1617
- Clarke, N. P.
N-1451, N-1585
- Clausner, J. E.
R-873
- Claxton, R.
N-1676
- Clayton, P.
CR 79.014
- Collins, D.
CR 79.010

Cohn, S. M.
 N-1536, CR 81.011
 Coin, D. S.
 R-883
 Cole, R. L.
 CR 82.034
 Conklin, S. R.
 N-1683
 Consroe, T.
 CR 74.006, CR 74.007
 Cooper, E. E.
 R-879, N-1285, N-1340, N-1616
 Corboy, T. A.
 CR 80.014
 Cordy, R. N.
 N-1358
 Cornelius, C.
 CR 82.027, CR 82.030, CR 83.008, CR 83.021
 Correa, E. L.
 N-1651, N-1665, N-1684
 Corrente, D. T.
 N-1427
 Csiol, J.
 CR 83.001, CR 83.002, CR 83.003
 Cox, J. V.
 N-1634, N-1664
 Crane, J.
 N-1637
 Crawford, J. E.
 N-1369
 Crilly, J. S.
 R-802, N-1290, N-1326, N-1367, N-1374, N-1379, N-1478
 Cronin, J. E.
 N-1406
 Crow, R. H.
 CR 74.001
 Croy, D. E.
 CR 83.005
 Cunningham, K.
 CR 78.002
 Curry, A. F.
 R-776, R-786, N-1382

 Dafalias, Y. F.
 CR 81.008, CR 83.010, CR 83.011
 Dalton, W. R.
 CR 78.001
 Davies, G. F.
 CR 74.001
 Davis, D. A.
 R-844, R-852-IV, N-1257, N-1258, N-1297, N-1371
 Demars, K. R.
 CR 74.005
 DeNatale, J. S.
 CR 81.008, CR 83.010, CR 83.011
 Der, J. J.
 N-1337, N-1476
 Derecho, A. T.
 CR 80.026, CR 80.027, CR 80.028
 Dillion, D. S.
 CR 80.018
 Dillon, D. S.
 CR 80.019, CR 82.015
 Dobbs, N.
 CR 81.010
 Dong, S. S.
 CR 75.002
 Dougherty, D. A.
 CR 83.005
 Drake, S. S.
 CR 77.017
 Drelicharz, J. A.
 N-1380, N-1386, N-1413, N-1535
 Drisko, R. W.
 R-777, R-792, R-802, N-1277, N-1290, N-1311, N-1321,
 N-1367, N-1367S, N-1374, N-1379, N-1379S, N-1426,
 N-1439, N-1474, N-1480, N-1515, N-1539, N-1562, N-1647

Durlak, E. R.
 R-840, R-877, N-1255, N-1275, N-1349, N-1419, N-1471,
 N-1517
 Dyer, S.
 CR 81.022

 Eaton, M. L.
 N-1535
 Eckroth, W. V.
 N-1565
 Edgerton, G. A.
 R-848, N-1437
 Engel, J. H.
 R-886
 Epps, J. A.
 CR 82.011
 Erich, R.
 R-903
 Eubanks, R. A.
 N-1622
 Evans, G. W.
 CR 77.006

 Farber, S.
 N-1611
 Fashbaugh, R. H.
 R-820, N-1255, N-1349, N-1377, N-1419, N-1543
 Ferritto, J. M.
 R-780, R-807, R-808, R-808S, R-823, R-841, R-846,
 R-847, R-867, R-885, N-1394, N-1434, N-1494, N-1518,
 N-1530, N-1548, N-1555, N-1566, N-1579, N-1640, N-1671
 Field, R. L.
 R-835
 Filter, H. E.
 CR 77.017
 Fitzgerald, E.
 CR 81.005
 Forrest, J. S.
 R-808, R-808S, R-846, R-847, N-1280, N-1324, N-1449,
 N-1475, N-1530, N-1548, N-1555, N-1566, N-1636
 Fraser, J.
 CR 78.005
 Freeman, R. E.
 CR 80.003
 Frounfelker, R.
 CR 83.025
 Fu, T. T.
 N-1268, N-1272, N-1294, N-1329, N-1368, N-1570, N-1580,
 N-1618, N-1653, N-1674

 Gaberson, H. A.
 N-1254, N-1266, N-1292, N-1318, N-1444, N-1590, N-1622
 Gardiner, G. H.
 CR 83.033
 Garg, S. C.
 N-1261, N-1306, N-1393, N-1398, N-1443
 Ghormley, E.
 N-1337
 Gilbert, E. A.
 CR 81.024
 Gill, S. P.
 CR 74.004
 Gordon, D. T.
 N-1275
 Gouda, Z. M.
 N-1489
 Graham, D. J.
 N-1293, N-1330
 Graham, R.
 CR 82.025, CR 82.026
 Gray, K. O.
 N-1469, N-1536, N-1567
 Gray, S.
 CR 78.012
 Griffin, D. F.
 N-1346

Griffin, O. M.
 N-1608, CR 83.004
 Gurganus, D.
 N-1482
 Guthrie, G. S.
 N-1262, N-1341

 Haack, W. R.
 N-1316
 Haber, J.
 CR 79.010
 Hafen, B. E.
 N-1456, N-1493, N-1499
 Haines, J. D.
 CR 83.019
 Hallanger, L. W.
 R-779, R-829, R-843, N-1409
 Hamilton, G. W.
 N-1533
 Hansen, R.
 CR 81.015
 Hansen, R. M.
 CR 79.011
 Hastings, G. G.
 CR 82.025, CR 82.026
 Hausfeld, B. A.
 CR 77.011, CR 83.025
 Haynes, H. H.
 R-785, R-805, R-869, R-874, N-1308, N-1341, N-1360,
 N-1436, N-1448, N-1544, N-1565, N-1594, N-1603, N-1639
 Hearst, P. J.
 R-872, N-1289, N-1325, N-1353, N-1411, N-1412, N-1470,
 N-1503, N-1541
 Helms, N.
 CR 79.015
 Herndon, J.
 CR 77.006
 Herrmann, H. G.
 R-775, R-799, R-888, N-1276, N-1540
 Herrmann, L. R.
 CR 81.008, CR 82.013, CR 83.010, CR 83.011
 Hienzsch, M. J.
 R-900
 Highberg, K. S.
 R-869, N-1436, N-1605
 Hironaka, M. C.
 R-871, N-1301, N-1304, N-1323, N-1335, N-1344, N-1449,
 N-1462, N-1472, N-1527, N-1610
 Hirshmsn, J.
 CR 78.008, CR 78.009
 Hitchcock, R. D.
 R-787, R-813, N-1315, N-1449
 Hochman, H.
 N-1253, N-1298
 Hoffman, C. R.
 R-783, R-812, R-814, N-1585
 Hollsn, M. E.
 N-1269, N-1400, N-1445
 Hollander, H. I.
 CR 80.005, CR 83.028
 Hopkins, J. S.
 N-1669
 Howard, P. L.
 CR 73.016
 Hromadik, J. J.
 R-852-V
 Huang, K. T.
 N-1327, N-1388, N-1473, N-1484, N-1502, N-1519
 Hughes, T. J.
 CR 75.007, CR 75.008, CR 77.001, CR 77.002
 Hughes, T. J. R.
 CR 81.006
 Hull, A. B.
 CR 82.034
 Hull, J. R.
 CR 82.034
 Humm, E. F.
 N-1450, N-1656

 Inouye, A.
 R-891, N-1537
 Iqbal, M.
 CR 80.026, CR 80.027
 Iwan, W. D.
 N-1583

 Jackson, M. D.
 CR 80.006
 Jenkins, J. F.
 R-868, N-1267, N-1284, N-1424, N-1500
 Johnson, F. R.
 N-1369, N-1680
 Jones, D. B.
 N-1258, N-1351, N-1529, N-1568, N-1648

 Kahn, L. A.
 CR 81.023
 Karrh, B. R.
 R-852-111, N-1348
 Katona, M. G.
 R-797, R-803, R-856, R-866, CR 79.016, CR 82.021,
 CR 83.023
 Keenan, W. A.
 R-828, R-878, N-1399
 Keeney, C.
 N-1602
 Keeton, J. R.
 N-1264, N-1319, N-1450, N-1479, N-1496, N-1504, N-1561,
 N-1561S, N-1574, N-1600, N-1656
 Kennedy, D.
 CR 75.003
 King, J. C.
 N-1387, N-1370, N-1378, N-1459
 Kirts, R. E.
 N-1599, N-1658
 Kleinhenz, N.
 CR 77.008, CR 77.009
 Klett, J. G.
 CR 80.005
 Kline, J.
 CR 81.005
 Kodres, C. A.
 N-1642, N-1659, N-1679
 Kosiewicz, C. E.
 CR 82.007, CR 83.040
 Kretschmer, T. R.
 R-817, R-848, R-893, N-1304
 Kruchowy, R.
 N-1612
 Kuepper, T. A.
 N-1547, N-1644, N-1650

 Lafrenz, D. J.
 CR 83.017
 Lsgus, P. L.
 CR 77.016, CR 83.018
 Lambiotte, D. J.
 N-1279
 LeDoux, L.
 N-1611
 Lee, H. J.
 R-873, N-1283, N-1295, N-1296, N-1438, N-1513
 Lee, T. Y. R.
 N-1596
 Lew, T. K.
 R-788, R-816, R-833, N-1280, N-1433, N-1442, N-1615
 Liffick, G. L.
 R-801, N-1262
 Liu, F. C.
 N-1288, N-1365, N-1403, N-1456, N-1619, N-1621
 Loehrke, R. I.
 CR 78.011
 Lorenzans, R.
 N-1546
 Lorman, W. R.
 N-1300, N-1384, N-1429, N-1447, N-1509, N-1534

Lory, E. E.
 R-883, R-884, R-900, N-1576, N-1591, N-1593
 Lucci, K. W.
 N-1309, N-1336
 Lumsdaine, E.
 CR 82.002, CR 82.003, CR 82.004, CR 82.005, CR 82.006
 Lumsdaine, M.
 CR 82.002, CR 82.003, CR 82.004, CR 82.005, CR 82.006

 Maison, J. R.
 R-794, N-1355
 Malloy, R. J.
 N-1513, N-1523, N-1597
 Mathews, C. W.
 N-1252S, N-1356, N-1363, N-1396, N-1455, N-1533, N-1573
 Mathey, R. G.
 CR 83.031
 Matsui, E. S.
 R-821, R-827, R-830, R-832, R-836, R-857, R-863,
 N-1278, N-1311, N-1338, N-1338S, N-1373, N-1382,
 N-1467, N-1531, N-1551
 Matzuk, G. J.
 CR 83.016, CR 83.028
 McCartney, J. F.
 R-806, N-1304, N-1391
 McClaine, A. W.
 N-1393, N-1492, N-1502
 McCone, A. I.
 CR 78.014, CR 78.019, CR 79.005, CR 79.012, CR 80.023
 McGovern, J. M.
 CR 79.015
 Meggitt, D. J.
 N-1456, N-1493, N-1499, N-1608
 Merriam, R.
 CR 77.018
 Migliore, H. H.
 R-778
 Miles, C. R.
 CR 82.007
 Miller, J. C.
 N-1638, N-1646
 Miller, W. V.
 R-858, N-1451, N-1507
 Milner, S. R.
 N-1502, N-1549
 Moreland, J. R.
 N-1582, N-1645
 Morse, G. P.
 CR 80.010, CR 81.002
 Morse, R. F.
 CR 81.002
 Moses, J. R.
 N-1647
 Mulert, M. A.
 CR 82.021
 Munk, R.
 CR 80.007, CR 80.008, CR 80.009, CR 80.017
 Muraoka, J. S.
 R-810, N-1263, N-1392, N-1396, N-1402, N-1423
 Murdoch, J. S.
 CR 82.022
 Murphy, G. L.
 N-1586
 Murtha, R. N.
 R-793, R-809, R-838

 Nacci, V. A.
 CR 74.005
 Nelson, F. E.
 N-1569
 Nettleton, J. E.
 CR 82.022
 Nichols, L. C.
 R-878
 Norbutas, J. A.
 N-1407

 Nordby, S. A.
 N-1436
 Nordell, W. J.
 N-1624
 Nordstrom, P. E.
 CR 82.014
 Nour-Omid, S.
 CR 81.007, CR 82.012, CR 83.027

 Oak, J. Z.
 N-1614
 Odello, R. J.
 N-1432, N-1508, N-1510, N-1511, N-1598
 O'Neill, T. S.
 N-1322, N-1474, N-1480, N-1647, N-1672
 Ottosen, H.
 CR 82.014
 Owens, R.
 N-1628, N-1633

 Padilla, J. R.
 N-1303, N-1304
 Page, G. L.
 R-785, N-1339
 Pal, D.
 R-820, N-1254, N-1314, N-1318, N-1331, N-1389, N-1485,
 N-1641, N-1655
 Palo, P. A.
 N-1604, N-1628, N-1630, N-1633, N-1662
 Paoluccio, J. P.
 CR 79.002
 Parisi, A. M.
 R-824, N-1342, N-1347, N-1361
 Patton, J. S.
 CR 80.025
 Payne, C. E.
 N-1488
 Peterson, F. E.
 CR 75.004, CR 75.005
 Phillips, J. W.
 CR 74.002
 Pickett, T. L.
 R-901, N-1629
 Piercy, W. S.
 R-886
 Pierpoint, W.
 K-880, N-1477, N-1558
 Poppendick, H. F.
 CR 77.015
 Posadas, S.
 N-1670
 Punnett, M. S.
 CR 74.002

 Raeke, C.
 CR 79.014
 Raecke, D. A.
 N-1276, N-1286
 Rail, R. D.
 N-1448, N-1493, N-1544, N-1624
 Ramberg, S. E.
 N-1608
 Rausch, A. S.
 R-852-II
 Rees, J.
 CR 82.028
 Reinhart, F. M.
 R-834
 Reitmeier, G. F.
 CR 74.002
 Rhodes, K.
 CR 79.004
 Ricchio, S. G.
 CR 73.014
 Richards, C. N.
 CR 75.001

Rigo, H. G.
 CR 77.008, CR 77.009, CR 77.011
 Rocker, K. Jr.
 R-775, N-1491, N-1592, N-1660, N-1682
 Rockwell, P. K.
 R-778, R-849, R-886, N-1453
 Rodrigues, C.
 CR 83.027
 Roe, T.
 R-850, N-1352, N-1384, N-1418, N-1420, N-1423, N-1466,
 N-1478, N-1495, N-1505, N-1535, N-1538, N-1546, N-1560
 Romine, G.
 CR 83.028
 Ross, R. J.
 R-785
 Rossiter, W. J. Jr.
 CR 83.031

 Saam, R. D.
 N-1490
 Sackman, J. L.
 CR 75.007, CR 75.008, CR 77.001
 Sadowski, E. P.
 CR 77.020
 Sanchez, I.
 N-1663
 Sarpkaya, T.
 CR 82.008
 Schniete, W. E.
 N-1307
 Schreiber, A. L.
 CR 81.002
 Schwab, L. K.
 N-1474, N-1480, N-1516, N-1562
 Scott, A. L.
 R-804, N-1274, N-1357
 Seabold, R. H.
 R-796, R-861, R-904, N-1606, N-1614, N-1670
 Self, H.
 N-1536, N-1559, N-1567
 Semien, C.
 N-1674
 Sergev, S. S.
 N-1483, N-1501, N-1583, N-1584, N-1608
 Shaw, R.
 CR 75.003
 Shields, D. R.
 N-1681
 Shippey, F.
 CR 78.010
 Shiroma, D. M.
 N-1473, N-1484, N-1588
 Shugar, T. A.
 R-854-I, R-854-II, N-1552, N-1652, N-1664
 Sims, A. V.
 CR 73.015
 Skaalen, C. L.
 R-826, R-852-II, R-906
 Skillman, E. P.
 R-881, N-1554
 Skop, R. A.
 N-1608
 Slaminaki, J. M.
 R-864
 Slater, J. H.
 CR 82.020
 Sleeten, R.
 N-1468
 Smith, A. N.
 CR 81.020
 Smith, A. P.
 R-893, N-1564
 Smith, C. K.
 N-1299, N-1582
 Smith, J.
 R-856, N-1413

 Smith, M. N.
 N-1256, N-1312, N-1388, N-1397, N-1414, N-1486, N-1532
 Sock, F. E.
 CR 81.010
 Solomonson, D.
 CR 80.013
 Springston, P. S.
 R-841, R-902, R-906, N-1514, N-1553, N-1563, N-1572,
 N-1578, N-1631, N-1676
 Staab, R. I.
 N-1532
 Stachiw, J. D.
 N-1468
 Stan, R.
 CR 83.037
 Staples, R. M.
 N-1367
 Stea, W.
 CR 81.010
 Stevens, D. L.
 CR 77.017
 Stone, P. L.
 R-840, N-1292, N-1332, N-1444, N-1465
 Streeter, R. L.
 CR 83.016
 Streets, B. C.
 R-893, N-1458, N-1564
 Sullivan, J. L.
 N-1680
 Swaiden, E. E.
 N-1340

 Tafoya, P. E.
 R-889
 Takahashi, S. K.
 R-789, R-795, R-798, N-1307, N-1430, N-1442
 Takayanagi, T.
 CR 80.027, CR 80.028
 Tancreto, J. E.
 R-828, N-1390, N-1425
 Tate, K. W.
 R-800, N-1269, N-1302
 Tausig, W. R.
 R-862, R-890, R-891, R-897, N-1498, N-1521, N-1525,
 N-1571
 Taylor, R. J.
 R-837, R-853, N-1282, N-1441, N-1446, N-1463, N-1581,
 N-1592, N-1627, N-1635
 Teylor, R. L.
 CR 75.007, CR 75.008, CR 77.001, CR 81.007, CR 82.020,
 CR 83.027
 Thayer, J.
 N-1585
 Thomas, M. W.
 N-1305, N-1405, N-1422
 Thomas, R. N.
 N-1460
 Thompaon, R.
 R-856
 Thompson, S.
 CR 78.005
 Thomson, H.
 N-1677, N-1682
 Thorn, P.
 CR 81.004
 Tinsley, R. J.
 N-1620, N-1623
 Tomita, H.
 N-1271
 Towne, R. C.
 R-852-I, N-1258, N-1386
 Traffalis, J. J.
 R-852-V, N-1258, N-1381, N-1625, N-1668
 Trechsel, H. R.
 CR 83.006
 Tree, T. R.
 R-830

CORPORATE AUTHOR INDEX

Acurex Corp.	CR 80.006	Joseph Paolucci, Consulting Engineers	CR 79.002
Advanced Coatings and Chemicals	CR 80.014	JR8 Associates, Inc.	CR 81.017, CR 81.018
AMETEK/ORED	CR 81.004		CR 81.019
Amman & Whitney	CR 81.010	J. S. Williams	CR 76.004, CR 77.012
Applied Software Analysis	CR 83.038		
Argonne National Laboratory	CR 82.034	Kling-Lindquist, Inc.	CR 83.001, CR 83.002
Artec Associates, Inc.	CR 74.004		CR 83.003
Arthur D. Little Inc.	CR 77.018, CR 78.003		
	CR 81.024	Los Alamos National Laboratory	CR 82.007, CR 83.040
		Lum-I-Neering Associates	CR 79.015
Bechtel Corp.	CR 77.013, CR 77.014		
Bechtel National Inc.	CR 78.014, CR 78.019	Manville Service Corp.	CR 83.019
	CR 79.005, CR 79.012, 80.023	MAR, Inc.	CR 78.001, CR 81.005
Beckman Instruments, Inc.,		Marine Technology Division, Naval	
Advanced Technology Operations	CR 73.014	Research Laboratory	CR 83.004
Ben Holt Co.	CR 73.015, CR 74.008	Mechanical Technology, Inc.	CR 78.012
Birdair Structures, Inc.	CR 74.002	Membrane Systems	CR 78.010
Boeing Co., Aerospace Group	CR 73.007	Mission Research Corp.	CR 80.013
Booz-Allen and Hamilton, Inc.	CR 74.006, CR 74.007		
	CR 75.003	National Bureau of Standards	CR 83.031
Brian Watt Associates, Inc.	CR 83.036	Newcomb & Boyd, Consulting	
Brown & Root Development, Inc.	CR 83.032	Engineers	CR 82.027, CR 82.028, CR 82.030
Buffalo Organization for Social and Technological			CR 83.008, CR 83.021
Innovation (80STI)	CR 78.013, CR 78.016	New Mexico State Univ.	CR 82.002, CR 82.003
	CR 78.017, CR 78.021		CR 82.004, CR 82.005, CR 82.006
		Oregon State Univ., School of Engineering,	
California Institute of Technology,		Wave Research Facility T.R. 3	CR 78.007
Graduate Aeronautical Laboratories	CR 79.006		
	CR 79.007, CR 79.008, CR 79.009, CR 79.013	P. L. Howard Associates, Inc.	CR 73.016
California State Univ., Long Beach,		Portland Cement Association,	
Dept. of Civil Engineering	CR 76.003, CR 77.010	Construction Technology Laboratories	CR 80.026
Cal Recovery Systems, Inc.	CR 83.017		CR 80.027, CR 80.028
C. E. Brennen	CR 82.010	Potomac General Research Group	CR 83.024
C. F. Braun and Co.	CR 74.001		
Childs Engineering Corp.	CR 81.009	Sanders & Thomas, Inc.	CR 83.016, CR 83.028
Colorado State Univ.,		Science Applications, Inc.	CR 75.001
Mechanical Engineering Dept.	CR 78.011		CR 80.007, CR 80.008, CR 80.009, CR 80.017
Concentration Specialists, Inc.	CR 78.005, CR 80.011	SCS Engineers	CR 73.010, CR 73.011
			CR 73.012, CR 76.001, CR 78.015, CR 82.001
DMJM	CR 81.016	S-CUBED	CR 83.018
Dow Chemical Co.	CR 77.017, CR 79.013	Security Design Associates	CR 81.022
Dow Chemical U.S.A.	CR 78.018	Sidney M. Johnson and Assoc.	CR 83.007
Dr. R. L. Webster, Consulting		Southwest Research Institute	CR 80.025
Engineer	CR 82.016, CR 82.018, CR 82.019	Space for Social Sciences	CR 79.014
Dyantech R/D Co.	CR 80.001	SRI International	CR 80.002, CR 80.003
		Stan and Associates, Inc.	CR 83.037
EG&G Washington Analytical Services		SYSTECH CORPORATION	CR 81.012, CR 83.025
Center, Inc.	CR 80.018, CR 80.019	Systems, Science and Software	CR 77.016
	CR 81.023, CR 82.015	Systems Technology Corp.	CR 77.008, CR 77.009
Electrospace Systems, Inc.	CR 81.020		CR 77.011, CR 79.003
EMC Engineers, Inc.	CR 83.005	Tracor Marine Ocean Technology Div.	CR 78.008, CR 78.009
Energy Analysts, Inc.	CR 80.016, CR 80.024	Two D Engineering, Inc.	CR 81.001
Engineering/Analysis Corp.	CR 75.004, CR 75.005	T. Y. Lin International	CR 82.031, CR 83.030
Ertec Western, Inc.	CR 83.020		
		Ultrasystems, Inc.	CR 83.012, CR 83.013, CR 83.014
F&K Group (The)	CR 81.026, CR 83.009		CR 83.015, CR 83.022
Ford, Bacon & Davis	CR 79.001	Underwriters Laboratories, Inc.	CR 79.004
		Univ. of California, Berkeley	CR 82.020, CR 83.027
Gage-Babcock & Associates	CR 81.011	Univ. of California, Berkeley,	
George P. Morse and Associates	CR 80.010, CR 81.002	Dept. of Civil Engineering	CR 77.001, CR 77.002
Georgia Institute of Technology	CR 81.013		CR 81.007, CR 82.012
Geoscience Ltd.	CR 77.015	Univ. of California, Berkeley,	
Gilbert Associates Inc.	CR 80.005	Structural Engineering Lab	CR 75.007, CR 75.008
Gordian Associates, Inc.	CR 81.014	Univ. of California, Davis	CR 83.010, CR 83.011
		Univ. of California, Davis,	
Halliburton Services	CR 77.006	Dept. of Civil Engineering	CR 81.008, CR 82.013
H. Hochman	CR 74.009	Univ. of California, Los Angeles,	
Honeywell, Inc., Marine Systems Center	CR 73.013	School of Engineering & Applied Science	CR 75.002
		Univ. of New Hampshire,	
International Nickel Co., Inc.	CR 77.020	Dept. of Electrical Engineering	CR 82.022
Intersea Research Corp.	CR 79.011	University of Notre Dame	CR 83.023
		University of Notre Dame,	
J. A. Epps, Consulting Engineer	CR 82.011	Dept. of Civil Engineering	CR 79.016, CR 82.021
J. H. Wiggins	CR 79.010	University of Rhode Island,	
Johns-Manville Sales Corp.	CR 80.012	Coll. of Engineering	CR 74.005
Research & Development Center	CR 78.006		

VSE Corp.	CR 80.004, CR 81.015
	CR 82.029, CR 82.032, CR 82.033
	CR 83.033, CR 83.034, CR 83.035
Waste Energy Technology Corp.	CR 83.029
Western Instruments Corp.	CR 82.014, CR 82.017
Westinghouse Electric Corp.	CR 78.002
Oceanic Div.	CR 80.015, CR 82.025, CR 82.026
Woodward-Clyde Consultants	CR 80.022
W. Rockenhauser	CR 73.009

AD NUMBER INDEX

AD523803L	- R-781	AD772537	- R-798	AD910117L	- CR 73.010	ADA011810	- N-1364
AD524141L	- R-782	AD773064	- N-1317	AD910118L	- CR 73.011	ADA011811	- R-819
AD532004	- N-1301	AD773065	- N-1315	AD910119L	- CR 73.012	ADA011812	- R-820
AD750258	- R-775	AD773066	- N-1310	AD910697L	- CR 73.015	ADA014173	- N-1392
AD753190	- R-778	AD773072	- N-1320	AD911175L	- CR 73.014	ADA014174	- N-1393
AD753194	- N-1253	AD773073	- N-1319	AD911293L	- N-1273	ADA014199	- N-1395
AD753195	- R-779	AD773074	- N-1312	AD912142L	- N-1278	ADA014200	- N-1397
AD754747	- N-1257	AD773090	- R-799	AD912748L	- N-1287	ADA014201	- R-823
AD754756	- N-1252	AD773945	- N-1322	AD912750	- N-1294	ADA014202	- R-824
AD756687	- CR 73.007	AD774080	- N-1331	AD912765	- N-1293	ADA014906	- CR 76.001
AD757675	- R-783	AD774081	- R-804	AD912815L	- N-1279	ADA017653	- N-1409
AD757704	- N-1254	AD774467	- R-800	AD912816L	- N-1304	ADA017692	- N-1404
AD757706	- N-1259	AD774468	- N-1318	AD913727L	- N-1290	ADA017693	- N-1399
AD757707	- N-1260	AD774469	- N-1313	AD914078	- R-792	ADA017695	- N-1407
AD757708	- N-1261	AD774470	- N-1302	AD914375L	- CR 74.004	ADA017697	- N-1406
AD757709	- N-1265	AD774473	- N-1299	AD915753L	- N-1291	ADA017698	- N-1405
AD757710	- N-1266	AD774478	- R-801	AD916101L	- N-1311	ADA017699	- N-1403
AD757711	- N-1264	AD774481	- R-802	AD916102L	- N-1300	ADA017700	- N-1396
AD757722	- CR 73.013	AD774482	- R-803	AD916353L	- N-1316	ADA017701	- N-1402
AD759673	- N-1263	AD774485	- N-1326	AD916357	- N-1321	ADA018908	- N-1411
AD759674	- N-1267	AD774486	- N-1314	AD916968L	- N-1330	ADA018950	- N-1416
AD759675	- N-1269	AD775658	- CR 74.005	AD916969L	- N-1325	ADA018952	- R-826
AD759676	- N-1270	AD776575	- R-794	AD916982	- N-1323	ADA018954	- N-1412
AD759677	- R-784	AD777030	- N-1328	AD917010L	- N-1309	ADA018956	- N-1415
AD759678	- R-785	AD777046	- N-1335	AD918221L	- N-1329	ADA019026	- R-828
AD762403	- N-1256	AD777047	- N-1333	AD918222L	- N-1332	ADA019027	- R-829
AD762404	- N-1271	AD777050	- N-1327	AD918951L	- N-1336	ADA019028	- N-1417
AD762405	- N-1274	AD777015	- N-1337	AD918952L	- N-1338	ADA019049	- N-1419
AD762406	- N-1276	AD777052	- N-1334	AD920678L	- R-812	ADA021279	- R-834
AD762407	- N-1281	AD777079	- R-805	AD922769L	- N-1346	ADA021841	- N-1379S
AD762408	- R-786	AD777084	- R-806	ADA002199	- N-1355	ADA021842	- N-1413
AD762409	- R-787	AD777471	- CR 74.006	ADA002216	- R-816	ADA021843	- N-1418
AD762410	- R-788	AD7778329	- N-1337	ADA002217	- N-1358	ADA021844	- N-1421
AD763801	- CR 73.016	AD778333	- N-1339	ADA002218	- N-1359	ADA021845	- N-1422
AD764053	- N-1277	AD778334	- N-1340	ADA002219	- N-1361	ADA021867	- R-833
AD764054	- R-790	AD780343	- R-809	ADA002220	- N-1363	ADA021868	- R-831
AD764055	- N-1285	AD781638	- R-810	ADA002256	- N-1353	ADA021892	- N-1424
AD764056	- N-1284	AD781639	- R-813	ADA003590	- CR 75.003	ADA021965	- N-1410
AD764057	- N-1275	AD781640	- R-811	ADA003936	- CR 75.002	ADA022038	- CR 77.001
AD764058	- R-789	AD781644	- R-1341	ADA004928	- N-1370	ADA022142	- CR 76.003
AD765568	- N-1252S	AD781645	- N-1343	ADA004931	- N-1365	ADA022446	- R-837
AD765569	- N-1280	AD781677	- N-1342	ADA003932	- N-1369	ADA022450	- N-1426
AD765570	- N-1282	AD782503	- N-1345	ADA003933	- N-1375	ADA022458	- N-1427
AD765571	- N-1289	AD782508	- N-1349	ADA004934	- N-1373	ADA024038	- N-1432
AD766100	- R-793	AD782580	- N-1344	ADA004935	- N-1374	ADA024050	- N-1434
AD766101	- N-1297	AD782582	- R-814	ADA004936	- N-1360	ADA024051	- N-1431
AD766103	- R-791	AD782583	- N-1348	ADA004937	- N-1362	ADA024052	- R-838
AD767323	- N-1286	AD783100	- CR 74.009	ADA004939	- N-1366	ADA024053	- N-1425
AD767634	- N-1292	AD786336	- N-1354	ADA004954	- R-818	ADA024054	- R-839
AD767635	- N-1295	AD786346	- N-1350	ADA004988	- CR 75.004	ADA025400	- N-1429
AD767636	- N-1298	AD786349	- N-1352	ADA004989	- CR 75.005	ADA026106	- N-1433
AD767637	- N-1305	AD786350	- N-1347	ADA004990	- CR 74.008	ADA026107	- N-1435
AD768280	- N-1283	AD786357	- N-1357	ADA007488	- N-1380	ADA026139	- N-1440
AD768287	- CR 74.001	AD786369	- N-1351	ADA007489	- N-1371	ADA026188	- N-1430
AD768291	- N-1296	AD786487	- R-815	ADA007527	- N-1376	ADA026189	- N-1438
AD768292	- N-1306	AD786757	- CR 74.007	ADA009097	- R-817	ADA026190	- N-1439
AD768293	- N-1307	AD787067	- CR 75.001	ADA009247	- N-1384	ADA026191	- R-841
AD768278	- R-796	AD896813L	- R-795	ADA009248	- N-1385	ADA026192	- N-1436
AD768279	- R-797	AD905719L	- R-776	ADA011054	- CR 75.007	ADA026198	- R-842
AD768373	- CR 74.002	AD905720	- R-780	ADA011103	- CR 75.008	ADA026202	- N-1441
AD769672	- N-1262	AD905721L	- R-777	ADA011805	- N-1387	ADA026251	- N-1442
AD772514	- N-1272	AD906998	- N-1255	ADA011806	- N-1389	ADA026252	- N-1443
AD772515	- N-1288	AD907010L	- N-1258	ADA011807	- N-1390	ADA026253	- N-1444
AD772516	- N-1303	AD908619	- N-1268	ADA011808	- R-822	ADA026338	- N-1437
AD772527	- N-1308	AD910116L	- CR 73.010	ADA011809	- N-1388	ADA028607	- N-1446

ADA028616	- N-1447	ADA047995	- N-1501	ADA066128	- N-1537	ADA085449	- N-1571
ADA028617	- N-1445	ADA047996	- N-1499	ADA066145	- N-1539	ADA085510	- N-1562
ADA028618	- R-843	ADA048057	- N-1502	ADA066187	- N-1533	ADA085521	- R-876
ADA028619	- R-845	ADA048058	- N-1504	ADA066221	- N-1534	ADA085612	- CR 80.011
ADA028620	- R-844	ADA048263	- CR 78.001	ADA066225	- N-1538	ADA085815	- R-877
ADA029660	- N-1367	ADA048441	- CR 78.002	ADA066258	- N-1535	ADA086854	- CR 80.019
ADA029378	- CR 76.004	ADA049229	- N-1505	ADA066259	- N-1543	ADA087282	- CR 80.016
ADA030280	- CR 77.002	ADA049244	- N-1503	ADA066297	- N-1542	ADA087321	- N-1580
ADA030872	- N-1452	ADA049248	- R-852-III	ADA066302	- N-1541	ADA088185	- CR 80.022
ADA030941	- N-1453	ADA049254	- N-1506	ADA067463	- CR 79.005	ADA089146	- CR 80.023
ADA030997	- N-1449	ADA049276	- CR 77.016	ADA068332	- CR 79.006	ADA089262	- N-1577
ADA030998	- N-1451	ADA049552	- R-859	ADA068690	- CR 79.008	ADA089266	- N-1578
ADA031045	- N-1448	ADA050262	- R-852-II	ADA068691	- CR 79.009	ADA089269	- R-879
ADA031046	- N-1450	ADA050797	- N-1514	ADA068748	- CR 79.007	ADA089299	- N-1575
ADA033482	- N-1461	ADA050881	- N-1507	ADA070850	- N-1549	ADA089300	- R-878
ADA033493	- R-847	ADA050882	- R-858	ADA070855	- N-1544	ADA089335	- CR 80.024
ADA033494	- N-1453	ADA050883	- R-857	ADA070856	- N-1545	ADA090828	- N-1588
ADA033551	- N-1456	ADA050884	- N-1513	ADA070857	- N-1546	ADA091517	- CR 80.027
ADA033558	- R-846	ADA051101	- CR 78.003	ADA070858	- N-1547	ADA091616	- CR 80.028
ADA033665	- N-1458	ADA051184	- R-860	ADA070859	- N-1548	ADA091672	- N-1569
ADA035800	- N-1466	ADA051489	- N-1511	ADA070860	- N-1550	ADA091738	- CR 80.026
ADA035801	- N-1462	ADA051868	- N-1512	ADA070861	- N-1552	ADA092899	- N-1573
ADA035802	- N-1464	ADA053505	- R-861	ADA070862	- N-1551	ADA092945	- N-1561S
ADA035904	- R-849	ADA053506	- N-1515	ADA070864	- R-869	ADA092946	- N-1585
ADA036158	- R-850	ADA053507	- N-1516	ADA070865	- R-870	ADA092958	- N-1592
ADA036917	- N-1469	ADA053557	- R-863	ADA070953	- R-872	ADA092960	- N-1583
ADA036931	- N-1468	ADA054215	- N-1517	ADA071673	- CR 79.011	ADA093071	- N-1582
ADA037164	- CR 77.010	ADA054476	- N-1519	ADA073002	- CR 79.014	ADA093078	- N-1579
ADA037873	- N-1474	ADA054601	- R-835	ADA073026	- CR 79.012	ADA093088	- N-1581
ADA037951	- R-851	ADA054720	- R-865	ADA073301	- N-1554	ADA093093	- N-1576
ADA038417	- N-1472	ADA054767	- R-864	ADA074504	- CR 79.010	ADA093356	- N-1584
ADA039096	- CR 77.006	ADA055601	- N-1518	ADA074836	- CR 79.015	ADA096852	- N-1587
ADA039181	- N-1473	ADA055609	- CR 78.012	ADA074871	- CR 79.013	ADA096853	- N-1594
ADA039288	- N-1475	ADA055623	- CR 78.007	ADA075739	- N-1561	ADA096854	- N-1589
ADA039609	- N-1478	ADA055624	- CR 78.010	ADA077868	- CR 79.016	ADA097116	- R-882
ADA039801	- N-1479	ADA055918	- CR 78.011	ADA078618	- N-1555	ADA097118	- R-881
ADA039821	- R-852-I	ADA055926	- N-1520	ADA078619	- N-1558	ADA097119	- R-880
ADA040278	- R-848	ADA056603	- CR 78.008	ADA078641	- R-874	ADA097120	- N-1591
ADA041164	- N-1483	ADA056604	- CR 78.009	ADA078653	- N-1556	ADA097133	- N-1593
ADA041235	- CR 77.015	ADA057405	- CR 78.014	ADA078654	- N-1553	ADA097162	- N-1590
ADA041305	- N-1484	ADA057684	- R-866	ADA078655	- R-871	ADA097870	- CR 81.001
ADA041605	- CR 77.017	ADA057941	- N-1521	ADA078726	- R-873	ADA099559	- CR 81.012
ADA041653	- N-1482	ADA057942	- N-1522	ADA078740	- N-1557	ADA099884	- CR 81.013
ADA041860	- CR 77.013	ADA058028	- CR 78.016	ADA079740	- N-1557	ADA100765	- CR 81.014
ADA042164	- R-852-V	ADA058144	- CR 78.017	ADA080322	- CR 80.003	ADA101379	- CR 81.015
ADA042181	- N-1487	ADA058713	- N-1523	ADA080564	- CR 80.004	ADA102196	- N-1609
ADA042385	- CR 77.014	ADA058726	- N-1524	ADA081154	- N-1560	ADA102473	- CR 81.020
ADA042906	- N-1489	ADA058858	- CR 78.013	ADA081230	- CR 80.002	ADA102888	- CR 81.016
ADA043366	- N-1480	ADA059698	- CR 78.018	ADA081261	- CR 80.005	ADA103071	- N-1596
ADA043430	- R-852-IV	ADA060094	- N-1527	ADA081381	- CR 80.006	ADA103072	- N-1597
ADA043582	- R-854-11	ADA060204	- R-867	ADA081384	- CR 80.006	ADA103073	- N-1600
ADA043605	- R-854-I	ADA060323	- N-1525	ADA081944	- N-1566	ADA103105	- N-1595
ADA043912	- R-855	ADA060422	- N-1526	ADA082165	- CR 80.018	ADA103107	- N-1598
ADA043918	- N-1493	ADA060475	- CR 78.019	ADA082737	- CR 80.001	ADA103431	- CR 81.017
ADA043950	- N-1490	ADA062432	- N-1529	ADA084840	- CR 80.013	ADA103432	- CR 81.018
ADA043951	- CR 77.018	ADA062433	- N-1530	ADA084920	- CR 80.015	ADA103433	- CR 81.019
ADA043968	- R-856	ADA062434	- N-1528	ADA085222	- CR 80.012	ADA108384	- CR 82.004
ADA043995	- N-1496	ADA062435	- N-1531	ADA085257	- N-1570	ADA109385	- CR 82.005
ADA044337	- CR 77.008	ADA062988	- CR 78.021	ADA085286	- N-1564	ADA108386	- CR 82.006
ADA044588	- N-1495	ADA064771	- CR 79.002	ADA085287	- N-1565	ADA110189	- CR 82.007
ADA045465	- N-1494	ADA064858	- CR 79.001	ADA085288	- N-1572	ADA110190	- CR 82.010
ADA045468	- N-1497	ADA065403	- CR 79.004	ADA085291	- R-875	ADA110325	- R-888
ADA045583	- CR 77.020	ADA065415	- CR 79.003	ADA085357	- N-1563	ADA110337	- N-1613
ADA046016	- N-1491	ADA066024	- N-1540	ADA085446	- N-1574	ADA110440	- N-1610
ADA046022	- N-1498	ADA066115	- R-868	ADA085447	- N-1568	ADA112043	- CR 82.012

ADA112550	- CR 82.011	ADA128761	- N-1655	ADB056254L	- CR 81.010	ADB077668L	- N-1676
ADA113673	- CR 82.013	ADA128764	- N-1659	ADB056270L	- CR 81.005	ADC004138L	- R-825
ADA114320	- N-1617	ADA128767	- N-1643	ADB056552L	- CR 81.009	ADC005278	- N-1391S
ADA114323	- N-1618	ADA128772	- N-1654	ADB056784L	- CR 81.011	ADC009818L	- CR 77.005
ADA114331	- N-1622	ADA128773	- N-1653	ADB058916L	- N-1602	ADC013504L	- N-1509S
ADA114460	- CR 82.021	ADA128790	- N-1661	ADB058917L	- N-1601		
ADA114461	- CR 82.020	ADA129257	- N-1663	ADB058918L	- N-1603		
ADA114957	- CR 82.015	ADA129732	- CR 83.001	ADB058922L	- R-884		
ADA114960	- CR 82.025	ADA129872	- R-900	ADB058923L	- R-885		
ADA114961	- CR 82.016	ADA130444	- CR 83.033	ADB058924L	- R-886		
ADA114978	- CR 82.014	ADA130445	- CR 83.034	ADB058925L	- R-887		
ADA114994	- CR 82.019	ADA130563	- CR 83.031	ADB058926L	- N-1599		
ADA1150.1	- CR 82.018	ADA131254	- CR 83.028	ADB058927L	- N-1604		
ADA115019	- CR 82.017	ADA131463	- CR 83.032	ADB058928L	- N-1606		
ADA115523	- CR 82.022	ADA131879	- CR 83.019	ADB058929L	- N-1608		
ADA116588	- N-1626	ADA133072	- N-1673	ADB058944L	- N-1607		
ADA116589	- N-1630	ADA133107	- N-1666	ADB058946L	- CR 81.023		
ADA116594	- N-1620	ADA133142	- N-1664	ADB059012L	- N-1605		
ADA116597	- N-1627	ADA133144	- N-1671	ADB059013L	- R-883		
ADA116835	- CR 82.027	ADA133149	- N-1672	ADB059235L	- CR 81.022		
ADA118523	- CR 82.029	ADA133240	- R-859	ADB060633L	- CR 81.024		
ADA118898	- CR 82.028	ADA133640	- N-1677	ADB062342L	- N-1611		
ADA119389	- N-1641	ADA133670	- N-1670	ADB062343L	- N-1612		
ADA119979	- N-1634	ADA133701	- R-903	ADB062344L	- N-1614		
ADA119984	- N-1628	ADA133717	- N-1674	ADB052345L	- N-1616		
ADA120023	- N-1636	ADA134006	- CR 83.037	ADB063763L	- R-890		
ADA120024	- N-1640	ADA134028	- CR 83.038	ADB064443L	- N-1621		
ADA120025	- R-882S	ADA136329	- CR 83.040	ADB064462L	- R-891		
ADA120639	- CR 82.001	ADA137438	- CR 82.008	ADB064681L	- CR 82.026		
ADA121864	- CR 83.004	ADB000410L	- N-1356	ADB065574L	- N-1629		
ADA121865	- CR 82.031	ADB000417L	- R-807	ADB065575L	- N-1623		
ADA122203	- CR 83.006	ADB001631L	- N-1368	ADB065621L	- N-1631		
ADA122408	- CR 82.032	ADB002855L	- R-808	ADB065622L	- N-1624		
ADA122638	- CR 82.033	ADB002856L	- R-808S	ADB065623L	- N-1619		
ADA123383	- CR 82.030	ADB002852L	- N-1379	ADB065655L	- R-892		
ADA123673	- CR 83.008	ADB002853L	- N-1377	ADB065661L	- R-893		
ADA123821	- CR 83.003	ADB002854L	- N-1372	ADB065667L	- N-1625		
ADA124047	- CR 83.002	ADB002864L	- N-1378	ADB066649L	- R-894		
ADA124215	- CR 83.000	ADB002865L	- N-1382	ADB067752L	- R-896		
ADA124235	- N-1649	ADB002866L	- N-1383	ADB068191L	- N-1632		
ADA124244	- N-1644	ADB002871L	- N-1381	ADB068192L	- N-1638		
ADA124245	- N-1647	ADB004842L	- R-821	ADB068205L	- R-895		
ADA124267	- N-1639	ADB004843L	- N-1391	ADB068224L	- N-1635		
ADA124866	- CR 83.010	ADB004844L	- N-1386	ADB068225L	- N-1633		
ADA124867	- CR 83.011	ADB006046L	- N-1394	ADB068213L	- N-1637		
ADA124868	- CR 83.013	ADB006047L	- N-1398	ADB070100L	- N-1645		
ADA124994	- CR 83.012	ADB007688L	- N-1400	ADB070930L	- N-1646		
ADA125157	- CR 83.016	ADB007689L	- N-1401	ADB070971L	- CR 83.007		
ADA125159	- CR 83.014	ADB008311L	- N-1408	ADB073370	- N-1650		
ADA125160	- CR 83.015	ADB008312L	- R-827	ADB073715L	- N-1652		
ADA125180	- CR 82.034	ADB009553L	- R-830	ADB073716L	- N-1651		
ADA125264	- CR 83.005	ADB009723L	- R-832	ADB073717L	- N-1648		
ADA125543	- CR 83.017	ADB009724L	- N-1420	ADB073727L	- N-1660		
ADA126315	- N-1656	ADB009725L	- N-1423	ADB073775L	- R-897		
ADA126860	- CR 83.020	ADB009960L	- R-836	ADB074245L	- N-1665		
ADA127249	- CR 83.022	ADB009984L	- N-1338S	ADB074755L	- CR 83.030		
ADA127461	- CR 83.025	ADB010796L	- N-1428	ADB076596L	- CR 83.036		
ADA128087	- CR 83.021	ADB011919L	- R-840	ADB076625L	- CR 83.035		
ADA128304	- CR 83.023	ADB012697	- N-1414	ADB076808L	- N-1662		
ADA128407	- CR 83.024	ADB015607L	- N-1454	ADB076816L	- R-901		
ADA128562	- CR 83.018	ADB015608L	- N-1457	ADB076834L	- N-1668		
ADA128588	- CR 83.029	ADB016588L	- N-1465	ADB076858L	- N-1667		
ADA128617	- CR 83.027	ADB055330L	- CR 81.007	ADB077212L	- R-902		
ADA128748	- N-1658	ADB055332L	- CR 81.006	ADB077253L	- N-1675		
ADA128756	- R-898	ADB055335L	- CR 81.008	ADB077257L	- N-1669		

CONTRACT NUMBER INDEX

N00014-78-C-00273
CR 80.018, CR 80.019

N00123-78-C-0391
CR 80.004

N00123-78-C-0868
CR 80.002, CR 80.003, CR 80.005

N00123-78-C-1057
CR 80.015

N00123-78-D-0392
CR 81.001

N00123-80-C-1271
CR 82.025

N00123-80-C-1272
CR 82.026

N00123-82-0149
CR 83.033, CR 83.035

N00123-82-D-0149
CR 82.029, CR 82.032, CR 82.033

N00123-83-0-0149
CR 83.034

N62399-71-C-0016
CR 73.007

N62399-71-C-0028
CR 73.009

N62399-72-C-0003
CR 73.013

N62399-72-C-0005
CR 74.005

N62399-72-C-0017
CR 73.010, CR 73.011, CR 73.012

N62399-72-C-0019
CR 73.014

N62399-72-C-0020
CR 74.001

N62399-72-C-0021
CR 73.015

N62399-73-C-0003
CR 74.002

N62399-73-C-0007
CR 74.004

N62395-73-C-0010
CR 73.016

N62399-73-C-0019
CR 75.004, CR 75.005

N62399-73-C-0020
CR 75.007, CR 75.008

N62399-73-C-0029
CR 74.006, CR 74.007, CR 75.003

N62399-73-C-0033
CR 75.001

N62399-74-C-0004
CR 74.008

N62474-79-C-5444
CR 80.007, CR 80.008, CR 80.009, CR 80.017

N62474-81-C-9382
CR 82.030, CR 83.008

N62474-81-C-9379
CR 83.001, CR 83.002, CR 83.003

N62474-81-C-9388
CR 83.012, CR 83.013, CR 83.014, CR 83.015, CR 83.022

N62474-81-C-9391
CR 82.016, CR 82.018, CR 82.019

N62474-81-C-9395
CR 83.005

N62474-81-C-9396
CR 83.007

N62474-81-C-9397
CR 83.024

N62474-81-C-9404
CR 82.031, CR 83.030

N62474-81-C-9405
CR 82.027, CR 83.021

N62474-82-C-8267
CR 83.036

N62474-82-C-8269
CR 83.020

N62474-82-C-8270
CR 83.023

N62474-82-C-8276
CR 83.010, CR 83.011

N62474-82-C-8277
CR 83.027

N62474-82-C-8303
CR 83.032

N62583-76-M-W820
CR 77.012

N62583-76-M-W928
CR 77.015

N62583-76-M-X553
CR 77.008

N62583-77-M-R178
CR 77.016

N62583-77-M-R-443
CR 78.001

N62583-79-MR-585
CR 82.002, CR 82.003, CR 82.004, CR 82.005, CR 82.006

N62583-80-MR-468
CR 81.006

N62583-80-MR-478
CR 81.008

N62583-80-MR-479
CR 81.007

N62583-81-MR-302
CR 81.020

N62583-81-MR-307
CR 82.022

N62583-81-MR-320
CR 82.013

N62583-81-MR-328
CR 82.011

N62583-81-MR-439
CR 82.020

N62583-81-MR-554
CR 82.010

N62583-81-MR-593
CR 82.028

N62583-81-MR-671
CR 83.006

N62583-82-MR-419
CR 82.012

N62583-82-MR-460
CR 83.017

N62583-82-MT-033
CR 83.019

N62583-82-MT-150
CR 83.025

N62583-82-MT-189
CR 83.029

N62583-83-MR-513
CR 83.033

N68305-74-C-0002
 CR 76.003
 N68305-74-C-0010
 CR 74.009
 N68305-74-C-0014
 CR 76.001

 N68305-75-C-0004
 CR 77.001, CR 77.002

 N68305-76-C-0003
 CR 77.017
 N68305-76-C-0007
 CR 77.009
 N68305-76-C-0009
 CR 77.013, CR 77.014
 N68305-76-C-0014
 CR 78.003
 N68305-76-C-0015
 CR 77.010
 N68305-76-C-0017
 CR 79.015
 N68305-76-C-0018
 CR 76.004
 N68305-76-C-0025
 CR 77.011
 N68305-76-C-0029
 CR 77.018
 N68305-76-C-0033
 CR 79.006, CR 79.007, CR 79.008, CR 79.009
 N68305-76-C-0036
 CR 78.011
 N68305-76-C-0038
 CR 77.006

 N68305-77-C-0001
 CR 78.012
 N68305-77-C-0003
 CR 78.014, CR 79.012, CR 80.023
 N68305-77-C-0005
 CR 78.018, CR 79.013
 N68305-77-C-0009
 CR 78.006
 N68305-77-C-0012
 CR 78.008, CR 78.009
 N68305-77-C-0013
 CR 77.020
 N68305-77-C-0014
 CR 78.010
 N68305-77-C-0017
 CR 78.002
 N68305-77-C-0018
 CR 78.013, CR 78.016, CR 78.017, CR 78.021
 N68305-77-C-0019
 CR 78.005
 N68305-77-C-0021
 CR 78.019
 N68305-77-C-0032
 CR 79.001
 N68305-77-C-0035
 CR 81.010
 N68305-77-C-0037
 CR 79.003
 N68305-77-C-0039
 CR 78.015
 N68305-77-C-0041
 CR 78.007

 N68305-78-C-0006
 CR 80.014
 N68305-78-C-0009
 CR 80.006
 N68305-78-C-0010
 CR 79.004
 N68305-78-C-0011
 CR 79.002

N68305-78-C-0018
 CR 79.011
 N68305-78-C-0021
 CR 80.011
 N68305-78-C-0025
 CR 79.016
 N68305-78-C-0036
 CR 79.005
 N68305-78-C-0046
 CR 80.010, CR 81.002
 N68305-78-C-0048
 CR 79.014
 N68305-78-C-0049
 CR 81.005
 N68305-78-C-0051
 CR 79.010
 N68305-78-C-0056
 CR 80.012

 N68305-79-C-0008
 CR 80.001
 N68305-79-C-0009
 CR 80.026, CR 80.027, CR 80.028
 N68305-79-C-0021
 CR 80.016, CR 80.024
 N68305-79-C-0026
 CR 81.009
 N68305-79-C-00344
 CR 83.018
 N68305-79-C-0036
 CR 81.017, CR 81.018, CR 81.019

 N68305-80-C-0004
 CR 82.014, CR 82.017
 N68305-80-C-0006
 CR 81.012
 N68305-80-C-0007
 CR 80.022
 N68305-80-C-0012
 CR 81.026, CR 83.009
 N68305-80-C-0016
 CR 81.004
 N68305-80-C-0017
 CR 81.011
 N68305-80-C-0020
 CR 81.023, CR 82.015
 N68305-80-C-0031
 CR 82.021
 N68305-80-C-0037
 CR 81.022
 N68305-80-C-0053
 CR 82.008
 N68305-80-C-0055
 CR 82.001
 N68305-80-C-0056
 CR 81.016
 N68305-80-C-0060
 CR 83.016, CR 83.028
 N68305-80-C-0063
 CR 81.024
 N68305-80-C-0064
 CR 81.014

 N68305-81-MP-10003
 CR 82.007
 N68305-81-MP-10027
 CR 82.034

 N68305-82-MP-20006
 CR 83.040
 N68305-82-MP-20010
 CR 83.040

 N68305-82-WR-20092
 CR 83.004
 N68305-82-WR-20172
 CR 83.031

N68305-3018-7940
CR 83.037

DNA001-79-C-0182
CR 80.013

F33615-77-C-2004
CR 81.013

F41608-79-C-A011-0008
CR 80.025

P.O. 80-MR-755
CR 81.015