

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

12

USAARL REPORT NO. 84-8



**ENERGY ABSORBING EARCUP ENGINEERING
FEASIBILITY EVALUATION**

AD-A144 179

By
**Ted A. Hundley
J.L. Haley, Jr.**

DTIC
ELECTE
AUG 9 1984
B

BIODYNAMICS RESEARCH DIVISION

July 1984

**U.S. ARMY AEROMEDICAL RESEARCH LABORATORY
FORT RUCKER, ALABAMA 36362**

USAARL

84 08 09 062

NOTICE

Qualified Requesters

Qualified requesters may obtain copies from the Defense Technical Information Center (DTIC), Cameron Station, Alexandria, Virginia 22314. Orders will be expedited if placed through the librarian or other person designated to request documents from DTIC.

Change of Address

Organizations receiving reports from the US Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

Disclaimer


The views, opinions, and/or findings contained in this report are those of the authors and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

Reviewed:



AARON W. SCHOPPER, PH.D.
LTC, MSC
Director, Biodynamics Research
Division

Released for Publication:

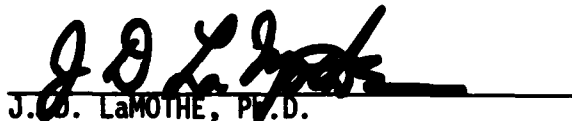

J. D. LAMOTHE, PH.D.
LTC, MS
Chairman, Scientific Review
Committee



DUDLEY R. PRICE
Colonel, MC, SFS
Commanding

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER USAARL REPORT NO. 84-8	2. GOVT ACCESSION NO. AD A 144 179	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Energy-Absorbing Earcup Engineering Feasibility Evaluation	5. TYPE OF REPORT & PERIOD COVERED	
	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) Ted A. Hundley and Joseph L. Haley, Jr.	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS SGRD-UAD-IV US Army Aeromedical Research Laboratory Fort Rucker, Alabama 36362	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62777A 3E162777A878 AG 137	
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Aeromedical Research Laboratory Fort Rucker, Alabama 36362	12. REPORT DATE July 1984	
	13. NUMBER OF PAGES	
14. MONITORING AGENCY NAME & ADDRESS (If different from Controlling Office)	15. SECURITY CLASS. (of this report) Unclassified	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Earcup, Energy Absorbing Earcup, Crushable Earcup, Sound-Attenuating Earcup, Metal Earcup		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) See Back of Form.		

DD FORM 1473
1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

20. ABSTRACT

The concept of using the integral structure of a noise-attenuating earcup as a "load-limiting" or energy-absorbing device is explored in this report. The standard earcup of the Army's SPH-4 flight helmet is a very rigid structure which requires a force of approximately 22,000 newtons to cause it to deform, a force level three times greater than the crushing strength of the skull. Fifteen different "crushable" earcups were constructed and evaluated for noise attenuation to determine their suitability for prototype construction. Three earcups were selected for the "crushability" evaluation. The corrugated aluminum earcup was selected as the best of the three evaluated. The aluminum earcup was modified to lower the cost and to increase the crushing depth to nearly 2 cm. The feasibility of producing a "crushable" earcup with similar noise attenuation characteristics to the existing Army SPH-4 earcup was demonstrated.

TABLE OF CONTENTS

	PAGE NO.
List of Illustrations	2
Introduction.	5
Methods and Materials	6
Results and Discussion.	12
Static Tests.	12
Dynamic Tests	13
Conclusions	21
Recommendations	21
References.	22
Appendix A. List of Trade Name Equipment	23

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



LIST OF ILLUSTRATIONS

FIGURE	PAGE NO.
1. Area of Cranium Coverage with the Standard Foam Liner of the SPH-4 Flight Helmet	5
2. Test Setup Used by Simula, Inc. to Screen the 15 Different Earcup Materials	7
3. Energy-Absorbing Earcups (Cross Section View).	8
4. Standard SPH-4 Earcup Cross-sectional View, as Tested.	9
5. Before and After View of Static Earcup Crush Test.	9
6. Test Setup for Earcup Impact Test.	10
7. Crushable Aluminum Earcup as Redesigned by Simula, Inc..	12
8. Earcup Load Versus Deflection in Static Crushing Test.	13
9. Dynamic Crushing Load and Pressure Rise of Honeycomb Energy-Absorbing Earcup.	14
10. Simula Honeycomb Energy-Absorbing Earcup Before and After Testing.	14
11. Dynamic Crushing Load and Pressure Rise of Foam Energy-Absorbing Earcup	15
12. Simula Foam Energy-Absorbing Earcup Before and After Testing	15
13. Dynamic Crushing Load and Pressure Rise of Convoluted Aluminum Energy-Absorbing Earcup.	16
14. Simula Convoluted Aluminum Energy-Absorbing Earcup Before and After Testing.	16
15. Dynamic Crushing Load and Pressure Rise of the Standard SPH-4 Earcup	17
16. Damage Done to the Standard Gentex SPH-4 Earcup During Static Testing	18
17. Comparison of the Dynamic Loading Performance of the Convoluted Aluminum Earcup and the Standard SPH-4 Earcup	18
18. Comparison of Static Crushing Performance of Redesigned Earcup to Convoluted Earcup.	19

LIST OF ILLUSTRATIONS (Cont.)

FIGURE		PAGE NO.
19.	Comparison of the Dynamic Crushing Performance of the Convolut- ed Aluminum Earcup and the Redesigned Aluminum Earcup	20
20:	Degree of Crushing Shown for Various Energy Impacts.	20

INTRODUCTION

The impact protection provided by the SPH-4 flight helmet has been effective in reducing the number of head injuries in aviation accidents. However, the protection against lateral impacts is very poor because no energy-absorbing material (foam) was used in the side of the SPH-4 (Haley, et al., 1983) (Figure 1). A study of helmets retrieved from Army aircraft accidents under the Aviation Life Support Equipment Retrieval Program (ALSERP) showed that lateral impacts resulted in a significantly higher rate of serious injury than did impacts to other regions (68% versus 40%) (Shanahan, 1983). By replacing the standard rigid plastic earcup with one designed to absorb impact energy, a significant reduction in head injuries can be obtained. Our goal was to establish the feasibility of an earcup design that would meet the acoustic attenuation, weight, and size requirements of the existing SPH-4 specification (MIL-H-43925A) while providing impact protection for the lateral area of the head. This report summarizes the initial efforts undertaken in pursuit of this goal.



FIGURE 1. Area of Cranium Coverage with the Standard Foam Liner of the SPH-4 Flight Helmet (Note the absence of foam at the sides)

METHODS AND MATERIALS

The first step taken was to select the design crush strength for the earcup. Available data on the fracture strength of the temporal area of the skull was very limited. Load levels for the temporoparietal region ranging from 2000 newtons (N) to 6000 N have been noted by several researchers (Gurdjian, Lissner, and Webster, 1974, Schneider and Naham, 1972, and Travis, Stalnaker, and Melvin, 1977). The wide range of values, based on cadaver skull laboratory impacts onto surfaces as small as 6.5 cm², provided some data from which to estimate a "crushing" load limit for the earcup. Since the existing SPH-4 earcup design covers an area of 79 cm², a relatively high value of 4500 N was selected. A lower level probably would insure no skull fracture, but the crush depth would increase beyond the 2.3 cm available in the SPH-4 helmet. Simply stated, this crushable level was required if the earcup area of the helmet was to absorb as much energy as other areas of the helmet without exceeding the impact (concussion) tolerance of the head.

A contract was let to Simula, Inc., to produce a number of prototype earcups. The task assigned to them was to design and build a prototype earcup which would meet the following requirements:

- a. Must fit in the available earcup space of the existing SPH-4 helmet.
- b. Must provide acoustic attenuation equal to the SPH-4 helmet specification.
- c. Must be compatible with existing SPH-4 communication system.
- d. Weight of each earcup must not exceed 99 g.
- e. Must crush at a load of 4500 N.
- f. Must be durable enough to withstand normal environmental exposure.
- g. Must not be prohibitive in cost.
- h. Pressure buildup during earcup crushing must be limited to prevent eardrum rupture.

Upon completion of the contract, Simula, Inc., delivered a report (Warrick and Svoboda, 1981) in which the earcup prototype development was described. The report said that a tradeoff study was done on 15 different materials. The three materials selected for prototype evaluation as earcup structure were: (a) closed-cell plastic foam, (b) aluminum honeycomb, and (c) convoluted aluminum sheet. These materials appeared to offer the best opportunity of achieving optimum energy absorption and acoustic attenuation with minimal weight and cost.

Acoustic attenuation was evaluated by placing an aluminum cylinder containing a calibrated microphone in a semireverberant room with a sound system capable of producing a continuous broadband noise field with a frequency range of 16 to 20,000 Hz. The output of the microphone without an earcup in place was compared to output with an earcup in place to determine the amount of acoustic attenuation present (Figure 2). To eliminate possible reproducibility problems, no earseals were used. The 15 earcup prototypes were bonded adhesively to an aluminum plate which in turn was bolted onto the aluminum cylinder containing the microphone. An O-ring provided an effective acoustic seal between the plate and the aluminum cylinder. The earcups were made in the form of a right circular cylinder of approximately the same internal volume as the standard SPH-4 earcup. This configuration provided a usable comparison of acoustic attenuation capability of the 15 design variations examined and was lower in cost than producing an oval shape similar to the standard earcup.



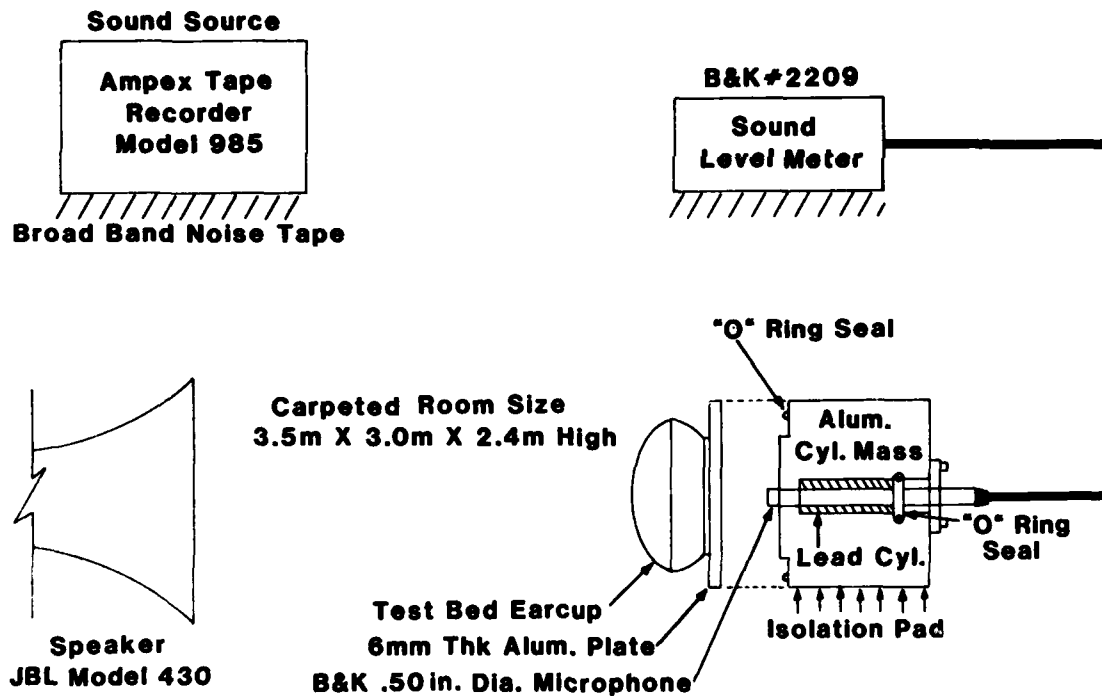


FIGURE 2. Test Setup used by Simula, Inc. to Screen the 15 different Earcup Materials

On the basis of these comparison tests, three candidate materials, with acoustic attenuation performance within the criteria of MIL-H-43925A, were selected. Prototype earcups of the three candidate materials were fabricated and sent to the US Army Aeromedical Research Laboratory (USAARL) for testing (Figure 3).

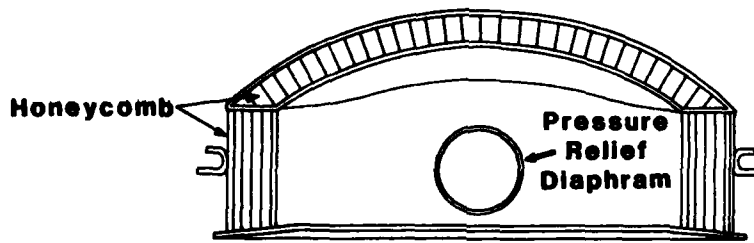

Honeycomb Earcup

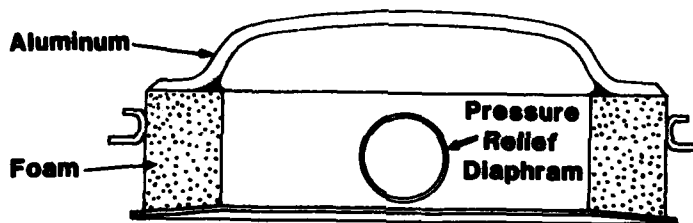

Foam Earcup



Convoluted Aluminum Earcup

FIGURE 3. Energy-Absorbing Earcups (Cross Section View)

Upon receipt of the earmuffs, static crush tests of the prototype and standard earmuffs were conducted using the Tinius-Olsen universal test machine.* Each earmuff, complete with earmuff seal, was placed on a flat steel plate on the test machine base. The standard SPH-4 cup configuration is shown in Figure 4. A segment of the earmuff bulge of the SPH-4 shell was cut off and placed on top of the earmuff to simulate the SPH-4 load distribution (Figures 4 and 5). The earmuff then was compressed at a rate of 2.5 cm/minute. The results of the static crush test provided a means of determining the ability of each earmuff to dissipate kinetic energy.


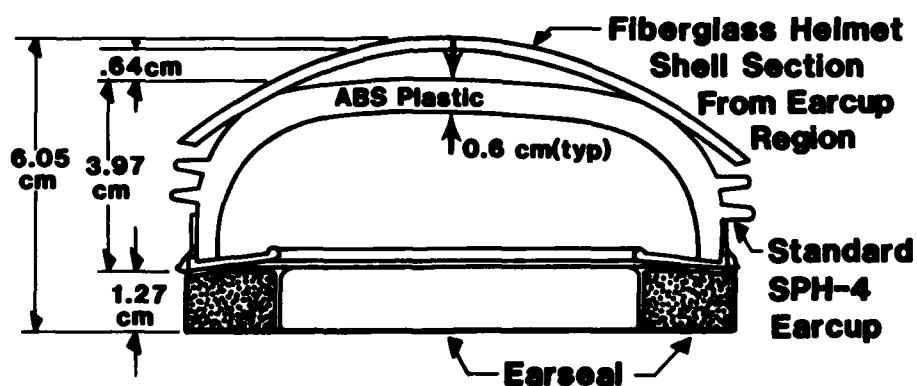


FIGURE 4. Standard SPH-4 Earmuff Cross Section, as Tested (Crushable earmuffs use identical helmet shell section and earmuff seal)



FIGURE 5. Before and After View of Static Earmuff Crush Test

Next, dynamic crush tests were conducted to evaluate the loading rate effect on internal pressure and transmitted load to the skull. Testing was done on the USAARL helmet drop tower as shown in Figure 6. The guide wires, headform carriage, headform, accelerometer, and drop tower mass conform to American Standard Association Z90.1 specifications. A piezoelectric accelerometer was used in the headform to measure acceleration for comparison with the force measurement. The transducers' outputs were displayed on a Nicolet model 2090 two-channel digital oscilloscope*, recorded on a Hewlett-Packard model 3960 FM tape recorder*, and transmitted to an Electronics Associates, Inc., analog computer model 681* for processing and digitized with a SYSTEMS 85 digital computer for data reduction and analysis.

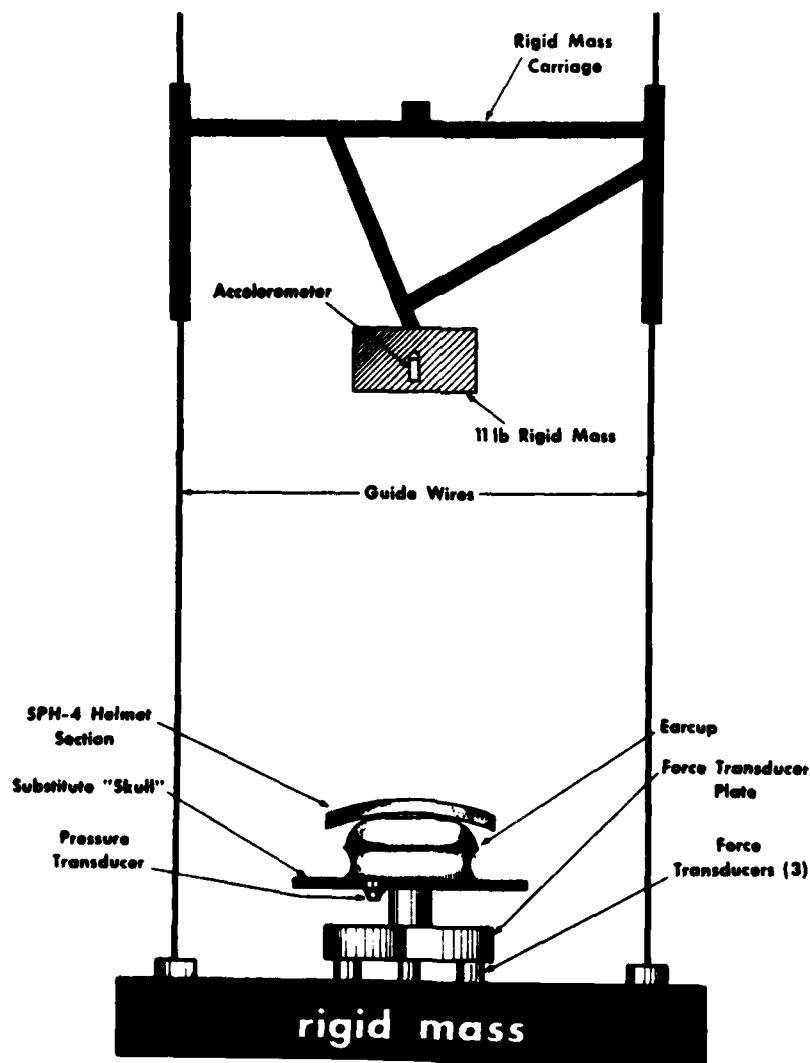

Earcup Test Set-up

FIGURE 6. Test Setup for Earcup Impact Test

Each earcup with earseal was placed on a flat metal plate supported by a load cell. A threaded hole in the plate contained a pressure transducer so that the dynamic pressure rise caused by the crushing of the earcup and the compression of the earseal could be measured. Each earcup was covered by a segment of the helmet shell to simulate the actual load distribution. The impacting surface was the relatively flat crown portion of the bare metal headform which weighed 4.99 kg, including the carriage.

The headform and carriage were raised to a height sufficient to generate 70 N·m of kinetic energy and then dropped onto the earcup as shown in Figure 6. Not enough earcup crushing was obtained at this energy level, so the drop height was increased enough to generate 90 N·m of kinetic energy for the remaining tests recorded in this report.

The review of the internal pressure change due to the volume change inside the earcup was informative. The pressure increased to 65 kilo Pascal (kPa) minimum. This pressure is more than twice the level required for rupture of the ear's diaphragm (James et al., 1982). Although the pressure venting devices in the earcups were opening, the time of opening occurred after the internal volume of the earcup and seal was reduced by 40 percent. This large volume change prior to pressure relief is caused primarily by the earseal's compression depth of one cm prior to collapse ("crushing") of the relatively rigid earcup.

Since all three prototype earcups were designed to relieve pressure as a result of structural deformation of the earcup proper, it was clear that the integral pressure venting would not occur until the earcup was crushed and that the earcup would not crush until the earseal was compressed; i.e., the integral pressure venting would not activate until after the pressure had exceeded 20-30 percent of atmospheric pressure--man's tolerable limit.

Notwithstanding the pressure increase problem, no change was made in the prototype development effort because a reliable, low-cost, light-weight, and small-volume pressure venting device was considered beyond the scope of this effort.

Review of the impact data for the three earcups revealed the best performance for the aluminum earcup. The second phase of this effort was begun by contracting with Simula, Inc., to produce a quantity of the crushable aluminum earcups for additional testing. The design was modified by Simula to make production easier as shown in Figure 7.

The earcup was formed from 1-mm thick 6061-0 aluminum. After forming, the earcup was heat-treated to a T6 hardness level. Slots of 0.25-mm width and 23-mm length were machined into the sides of the earcup shell to improve the crushing performance of the earcup shell and to provide a pressure venting mechanism. The slots were sealed with enamel paint to maintain an acoustically sealed enclosure. A metal cap with four tangs were bonded adhesively to the top of the earcup to provide a method of attaching the earcup to the helmet harness.

Upon receipt of the redesigned aluminum earmuffs, the static and dynamic crush tests were repeated to verify that the performance of the redesigned earmuff was acceptable. A cadaver test program then was begun to verify that the crushing load of the earmuff did not exceed human tolerance. The cadaver test program is described in USAARL Report 83-14, titled "Impact Response of an Energy Absorbing Earmuff" by Shanahan and King, 1983.

RESULTS AND DISCUSSION

STATIC TESTS

The results of the static crush tests are depicted in Figure 8. The standard SPH-4 earmuff was very rigid with the failure load reaching 20,000 N. The crushable earmuffs did not exceed 6000 N until after they had been crushed through a total distance of 2.0 cm. The convoluted aluminum earmuff performed best with the honeycomb earmuff a close second. The crushable foam earmuff was the least efficient as its loading curve approximated an exponential increase as a function of crushing distance; the load should increase rapidly to the design load and then maintain that load through the available crushing distance for maximum efficiency. The convoluted aluminum earmuff came closest to the "limit" load level with an average crushing load of 4000 N through a total distance of approximately 1 cm.

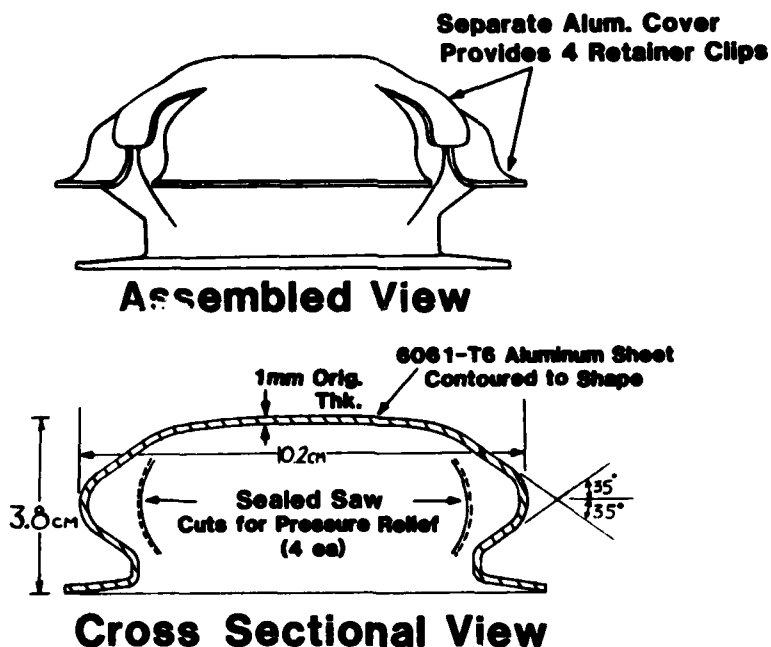


FIGURE 7. Crushable Aluminum Earmuff as Redesigned by Simula, Inc.

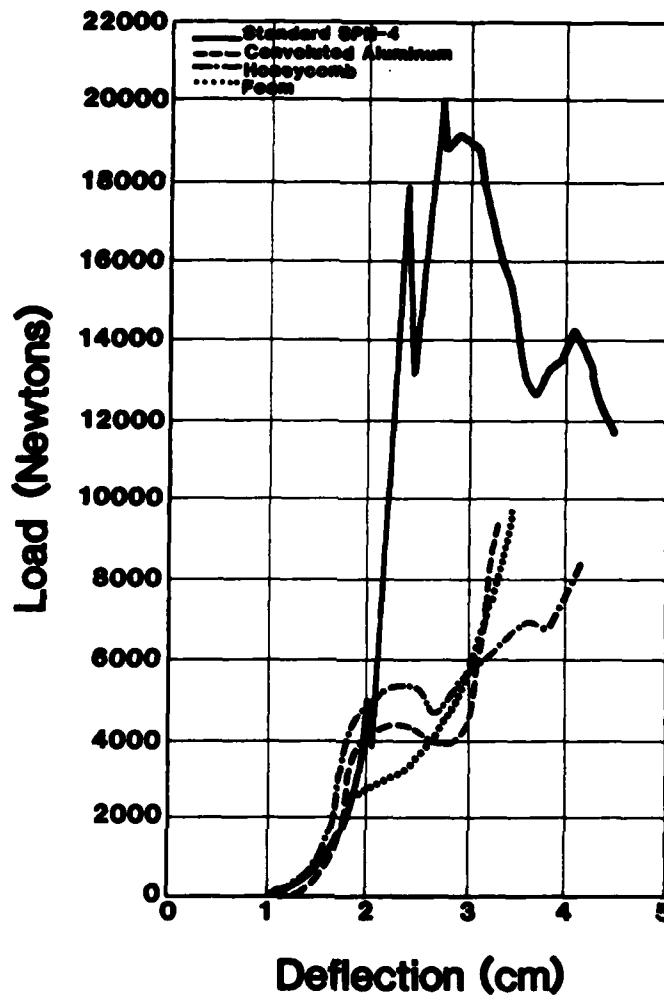


FIGURE 8. Earcup Load Versus Deflection in Static Crushing Test

DYNAMIC TESTS

The first dynamic tests were done from a drop height of 1.43 meters which resulted in a kinetic energy level of 70 N·m. The honeycomb earcup was tested first. The recorded peak force was 9620 N, but this peak was reached because of "ringing" in the load cell as shown in Figure 9. After filtering the data, the peak recorded was 6400 N and the peak pressure was 71.3 kPa. Examination of the earcup showed that the specimen was not totally crushed (Figure 10). Thus, the drop height was increased to 1.84 meters or to 90 N·m energy for the remaining tests. The honeycomb earcup was not tested at 90 N·m energy due to the limited number available.

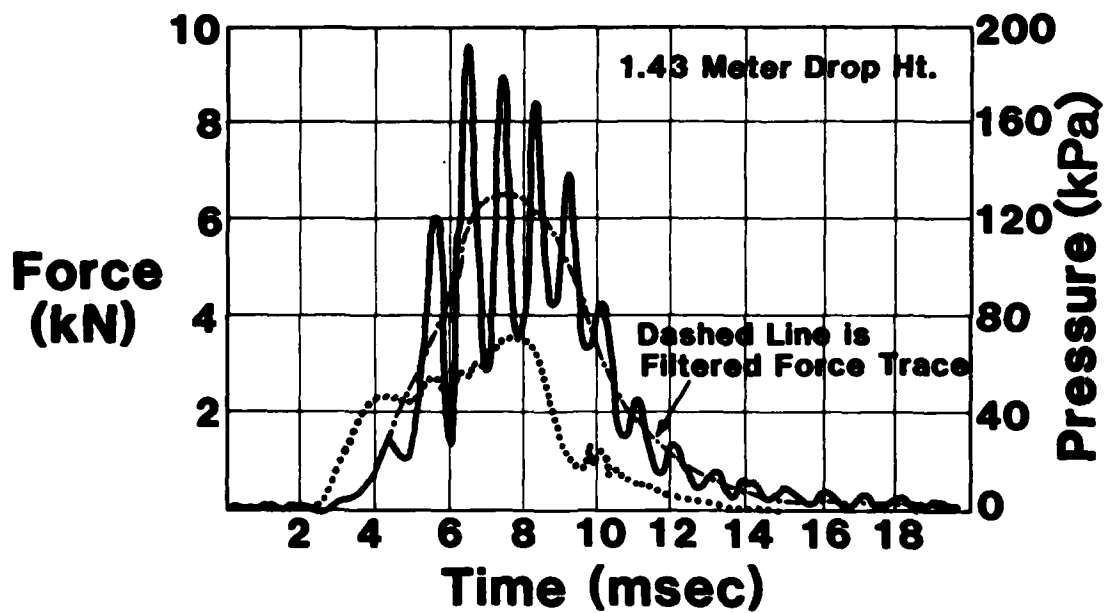


FIGURE 9. Dynamic Crushing Load and Pressure Rise of Honeycomb Energy-Absorbing Earcup

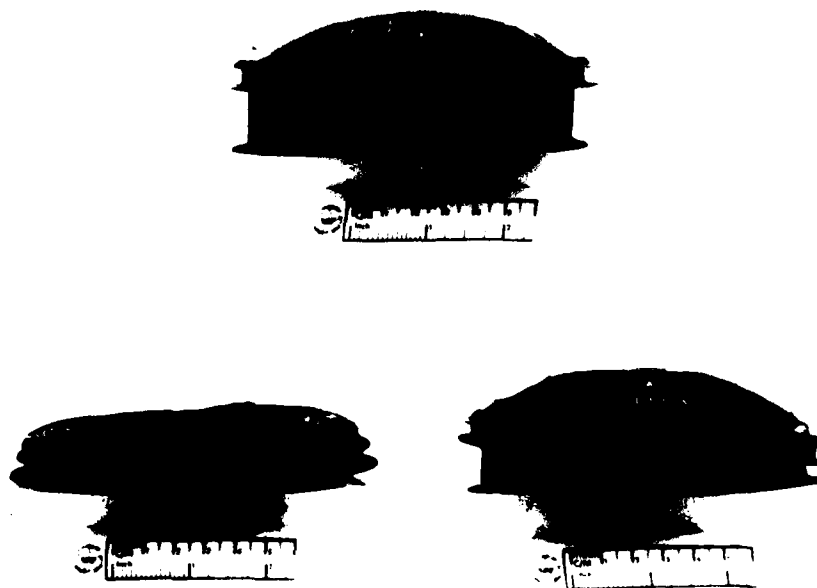


FIGURE 10. Simula Honeycomb Energy-Absorbing Earcup Before and After Testing

The measured peak force was 5790 N for the polyurethane foam earcup as shown in Figure 11. After filtering to eliminate the "ringing," the peak force was 5100 N. The peak pressure was 93.6 kPa. Examination of the earcup after the test showed an acceptable amount of symmetrical crushing (Figure 12).

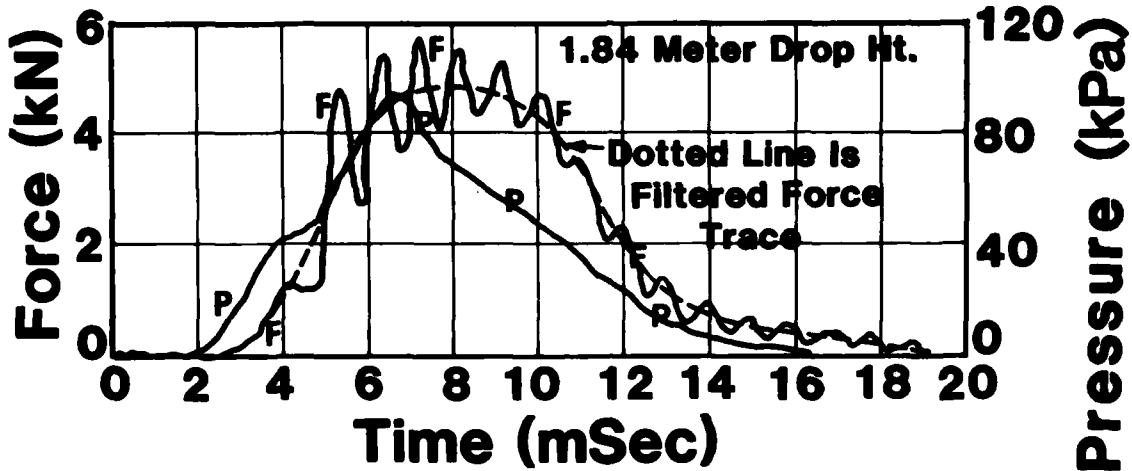


FIGURE 11. Dynamic Crushing Load and Pressure Rise of Foam Energy-Absorbing Earcup

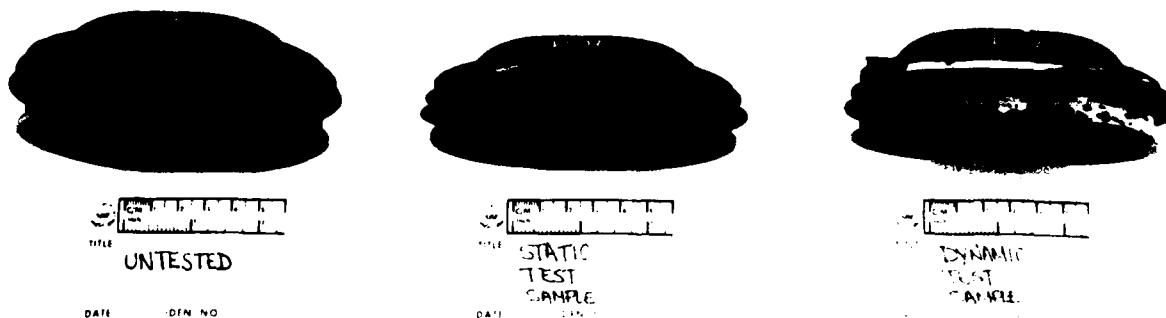


FIGURE 12. Simula Foam Energy-Absorbing Earcup Before and After Testing

To minimize the "ringing" in the force trace, the strain-gauge type transducer with a 1000 Hz resonant frequency was changed to a force transducer with 3000 Hz resonant frequency. The replacement transducer consisted of three Kistler 902A piezoelectric load washers* mounted under a 2.5-cm thick triangular aluminum plate. This new load transducer reduced the "ringing" problem to an acceptable level.

The convoluted aluminum was tested next; the measured peak force was 5840 N as shown in Figure 13. The peak pressure was 94.4 kPa. A reasonably consistent load was maintained throughout the crushing. The earcup crushed symmetrically as shown in Figure 14.

*See Appendix A

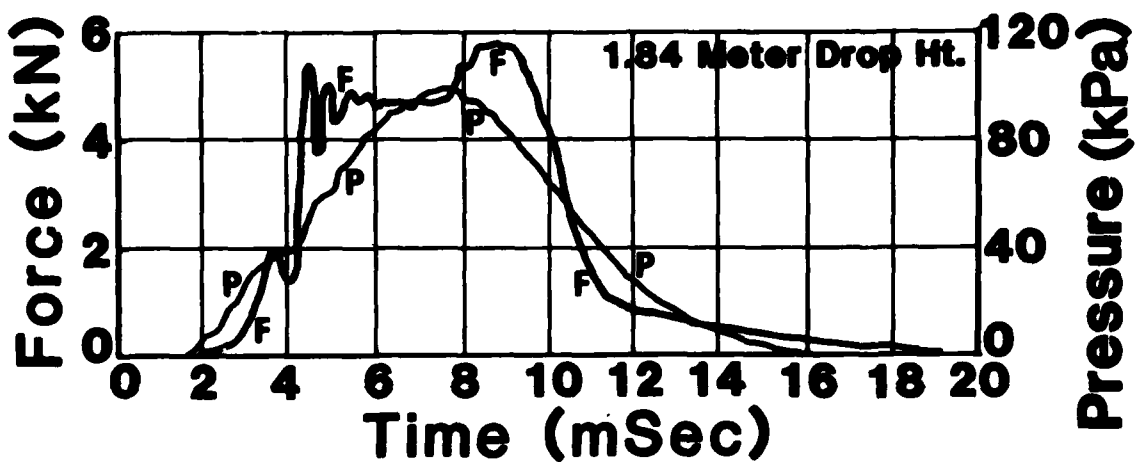


FIGURE 13. Dynamic Crushing Load and Pressure Rise of Convoluted Aluminum Energy-Absorbing Earcup

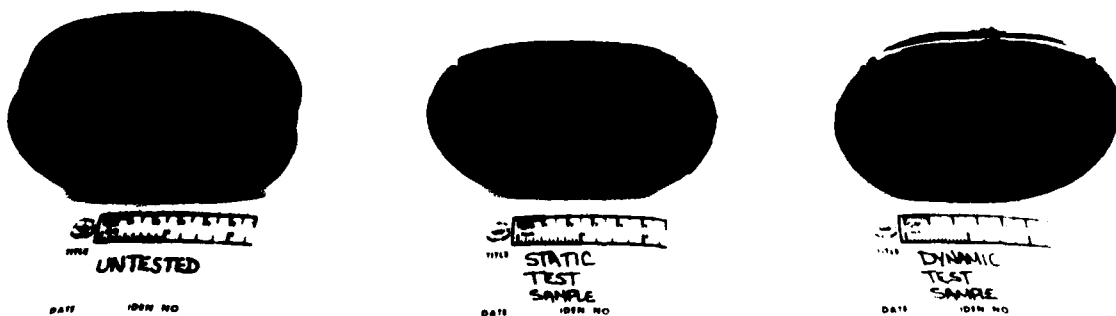


FIGURE 14. Simula Convoluted Aluminum Energy-Absorbing Earcup Before and After Testing

For comparison, a standard SPH-4 plastic earcup also was impacted. The measured peak force was 22,400 N as shown in Figure 15. The peak pressure was 65.0 kPa. No visible damage to the earcup could be detected after the test. The damage done to the earcup during static testing is shown in Figure 16. The cracking-type failure usually is a catastrophic event that occurs suddenly when the failure load is reached. If the load is removed prior to failure, no significant damage can be detected. The dynamic loading behavior of the convoluted aluminum earcut is compared to the standard SPH-4 earcup in Figure 17. The superior performance of the convoluted aluminum earcup in limiting the transmitted force and doing work to absorb the kinetic energy is clear.

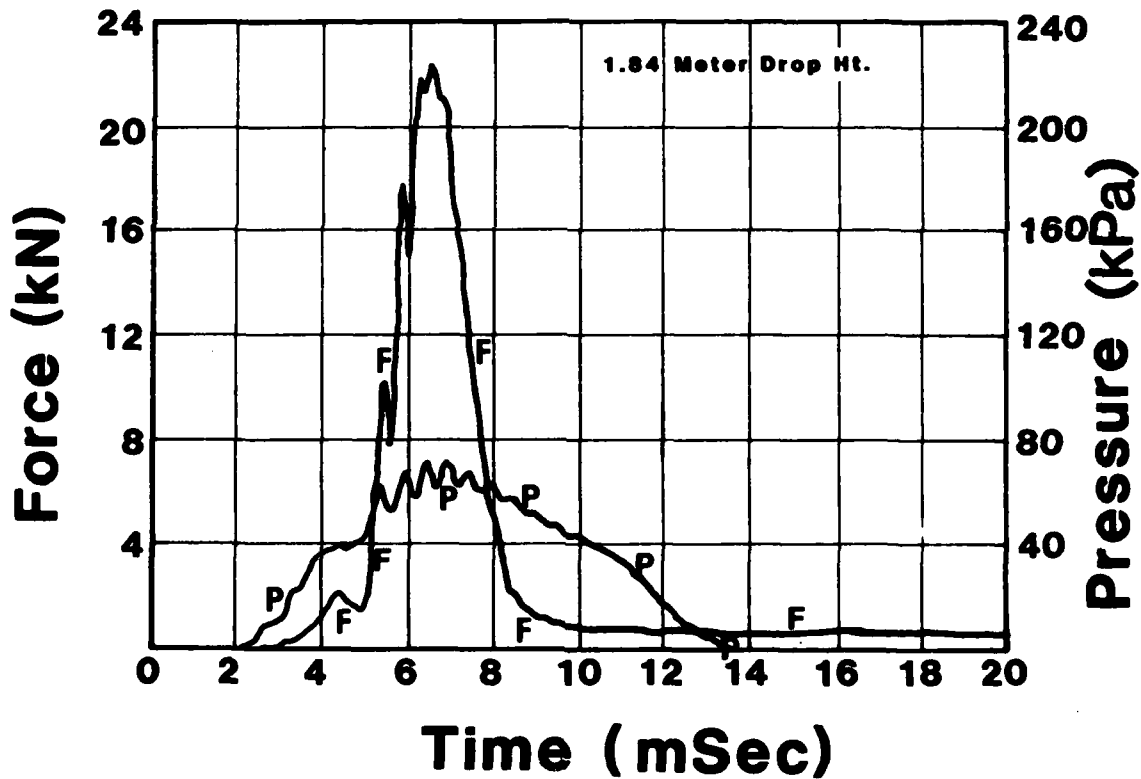


FIGURE 15. Dynamic Crushing Load and Pressure Rise of the Standard SPH-4 Earcup

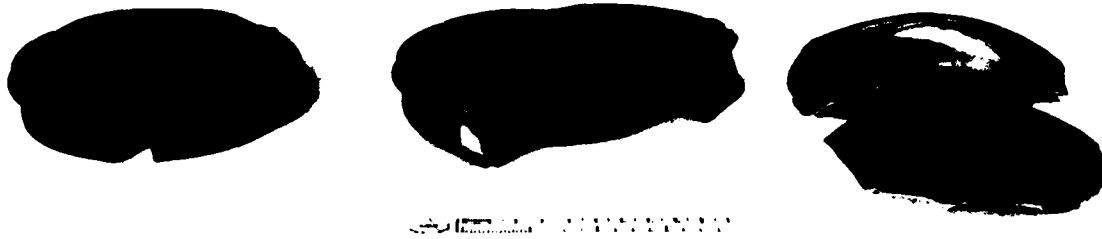


FIGURE 16. Damage Done to the Standard Gentex SPH-4 Earcup During Static Testing

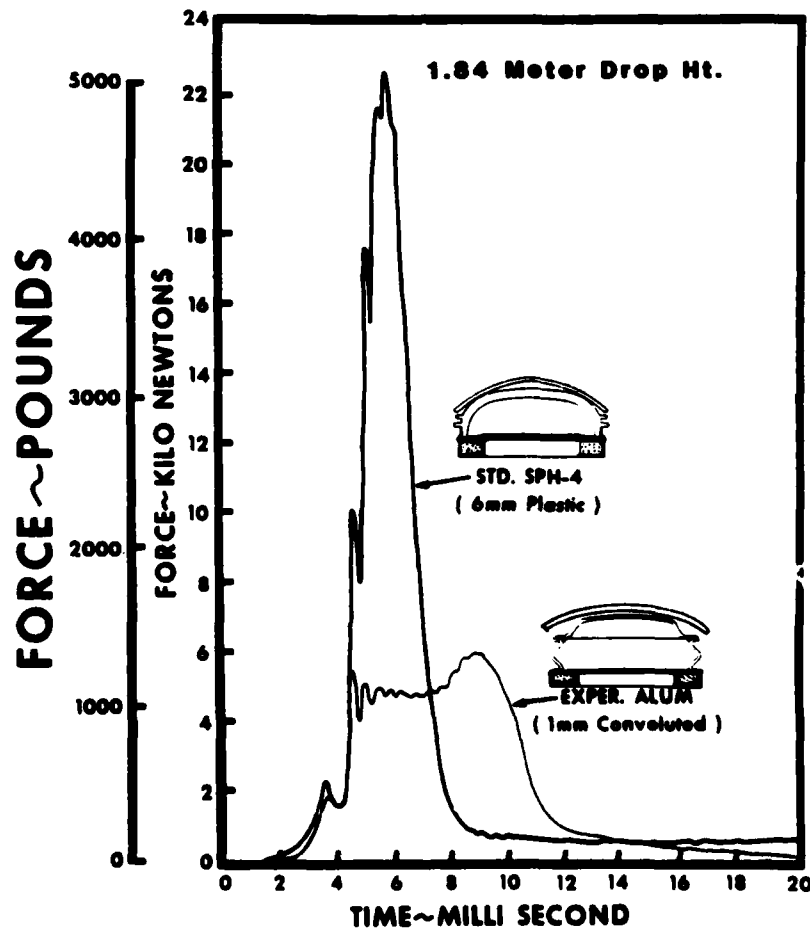


FIGURE 17. Comparison of the Dynamic Loading Performance of the Convoluted Aluminum Earcup and the Standard SPH-4 Earcup

Analysis of the high speed film showed that the pressure vents were opening at approximately 7 msec after the headform touched the earcup. This was too late to prevent the internal pressure from exceeding the desired 30 kPa limit which is the assumed pressure at which the normal human eardrum will rupture (James et al., 1982). Compression of the earseal alone is enough to raise the internal pressure above the rupture level. Nonetheless, the vent does shorten the time duration and the peak pressure (if crushing occurred without venting); thus, the vent is deemed desirable.

After completion of this testing, the convoluted aluminum earcup design was selected as the best performer on the basis of simplicity, load limit performance, and probable reliability in service. Simula, Inc., then modified the design to improve the producibility. The producibility changes included a change in contour to provide more stroke and a reduction in the aluminum thickness to 1.0 mm. The redesigned earcups were produced and sent to USAARL for evaluation.

Upon receipt of the redesigned earcups, the static and dynamic crushing tests were repeated. The static crushing performance of the redesigned earcup was improved with approximately 1 cm of extra crushing distance as shown in Figure 18. The dynamic crushing performance also showed some improvement as shown in Figure 19. The degree of dynamic crushing for five energy levels from 41 N·m to 95 N·m for the redesigned earcup is illustrated in Figure 20.

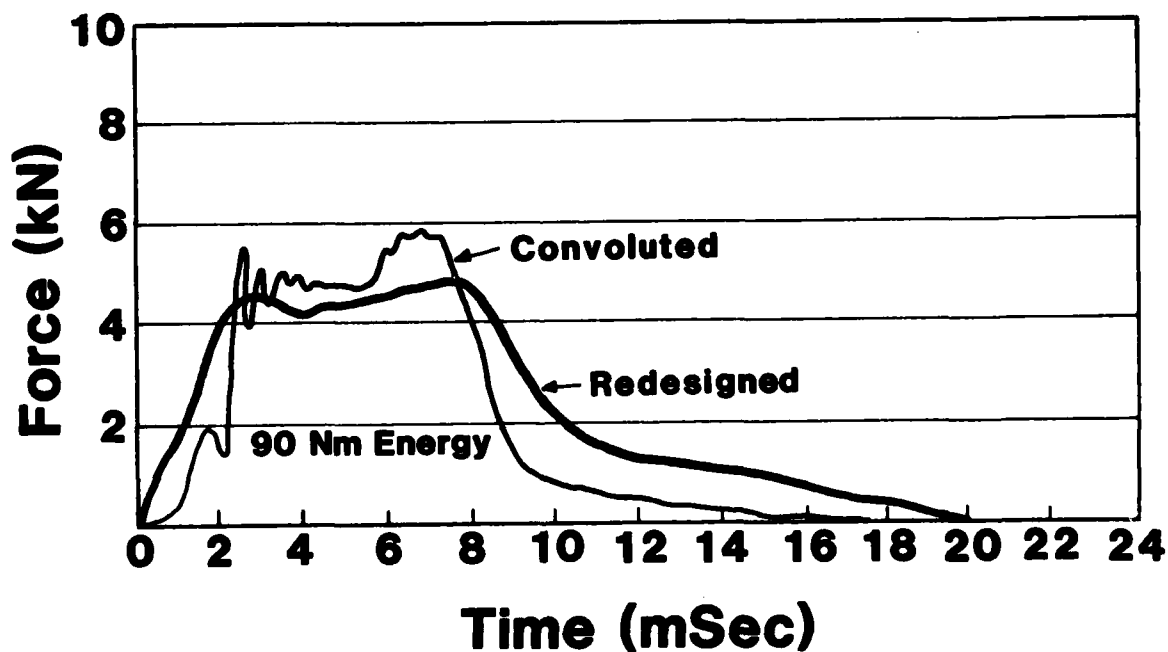


FIGURE 18. Comparison of Static Crushing Performance of Redesigned Earcup and Convoluted Earcup

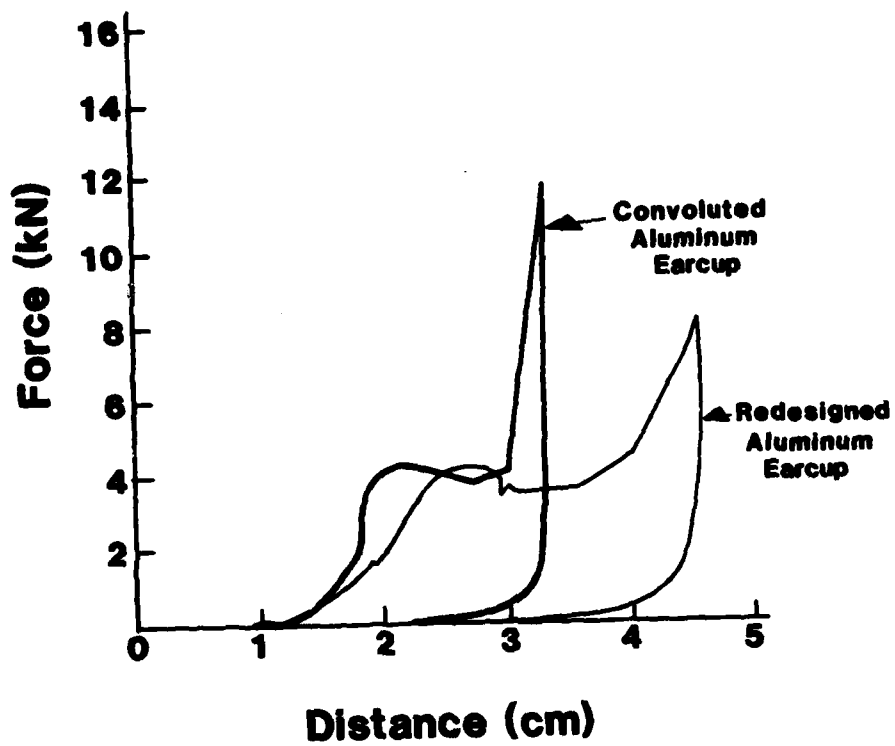


FIGURE 19. Comparison of the Dynamic Crushing Performance of the Convoluted Aluminum Earcup and the Redesigned Aluminum Earcup

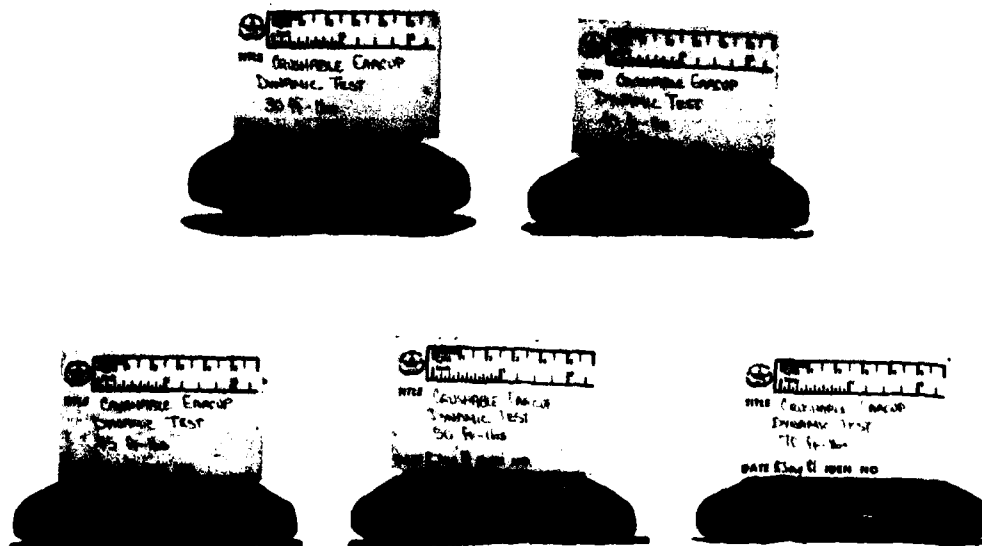


FIGURE 20. Degree of Crushing Shown for Various Energy Impacts

CONCLUSIONS

It is concluded that:

1. A need exists for an energy-absorbing earcup.
2. An energy-absorbing "crushable" earcup can be built with existing technology and within the limitations imposed by the existing helmet and acoustic protection requirements.

RECOMMENDATIONS

It is recommended that:

1. All impact-protective helmets containing large volume (circumaural type) earcups be provided with an integral energy-absorbing mechanism in the earcup structure.
2. Energy-absorbing earcups should be procured for retrofit to all inventory flight helmets and for inclusion in all future flight helmets.

REFERENCES CITED

- American Standards Association (ASA). 1971. *Specifications for protective headgear for vehicular users*. New York: American National Standards Institute, Inc. Z90.1.
- Department of the Army MIL-H-43925A. 1975. *Helmet, flyer's protection SPH-4*. Natick, MA: United States Army Natick Research and Development Command.
- Gurdjian, E. S., Lissner, H. R., and Webster, J. E. 1974. The mechanism of production of linear skull fracture. *Surgery, Gynecology, and Obstetrics*. 85:195-210.
- Haley, J. L., Shanahan, D. F., Reading, T. E., and Knapp, S. C. 1983. Head impact hazards in helicopter operations and their mitigation through improved helmet design. In: Ewing, C. L. (and others) (Eds.) *Impact Injury of the Head and Spine*. C. C. Thomas, Springfield, IL.
- James, D. J., Pickett, V. C., Burdett, K. J., and Chessemann, A. 1982. *The response of the human ear to blast, Part 1: The effect on the eardrum of a "short" duration, "fast" rising, pressure wave*. United Kingdom Ministry of Defense, Joint AWRE/CDE Report No. 04-82.
- Schneider, D. C. and Naham, A. M. 1972. Impact studies of facial bones and skull. In: *Proceedings of the Sixteenth Stapp Car Crash Conference*. Society of Automotive Engineers, Inc. New York, NY.
- Shanahan, D. F. 1983. Basilar skull fracture in US Army aircraft accidents. *Aviation, Space, and Environmental Medicine*. pp. 628-631. July 1983.
- Shanahan, D. F. and King, Albert I. 1983. *Impact response of an energy absorbing earcup*. Fort Rucker, AL: US Army Aeromedical Research Laboratory. USAARL Report 83-14.
- Travis, L. W., Stalnaker, R. L., and Melvin, J. W. 1977. Impact trauma of the human temporal bone. *The Journal of Trauma*. 17(10):761-766.
- Warrick, James C. and Svoboda, Craig M. 1981. *Development of crashworthy earcups for the SPH-4 Army air crewman helmet*. Tempe, AZ: Simula, Inc., TR1408. Contract No. DABT01-79-C-0250. Privately published report.

APPENDIX A

LIST OF TRADE NAME EQUIPMENT

Electronic Associates, Inc.
185 Monmouth Parkway
West Long Branch, NJ 07764

Model 581 analog computer

Hewlett-Packard
2000 South Park Place
Atlanta, GA 30339

Model 3960 FM tape recorder

Kistler Instrument Corp.
75 John Glenn Tr.
Amherst, NY 14120

902A piezoelectric load washers

Nicolet
3902 Casaba Loop
Valrico, FL 33594

Model 1090 two-channel digital oscilloscope

Simula, Inc.
2223 S. 48th Street
Tempe, AZ 85282

Prototype earcups

Systems Engineering Laboratories
6901 West Sunrise Blvd.
Ft Lauderdale, FL 32650

85 Digital Computer

Tinius-Olsen Testing Machine Co., Inc.
Easton Road
Willow Grove, PA 19090-0429

LoCap universal testing machine

INITIAL DISTRIBUTION

Commander
US Army Natick R&D Laboratories
ATTN: Technical Librarian
Natick, MA 01760

Commander
US Army Research Institute of
Environmental Medicine
Natick, MA 01760

US Navy
Naval Submarine Med Rsch Lab
Medical Library, Naval Submarine Base
Box 900
Groton, CT 06340

US Army Avionics R&D Laboratory
ATTN: DAVAA-O
Fort Monmouth, NJ 07703

Cdr/Dir
US Army Combat Surveillance &
Target Acquisition Laboratory
ATTN: DELCS-D
Fort Monmouth, NJ 07703-5304

US Army R&D Technical
Support Activity
Fort Monmouth, NJ 07703

Commander
10th Medical Laboratory
ATTN: DEHE (Audiologist)
APO New York 09180

Chief
Benet Weapons Laboratory
LCWSL, USA ARRADCOM
ATTN: DRDAR-LCB-TL
Watervliet Arsenal
Watervliet, NY 12189

Commander
Naval Air Development Center
Biophysics Lab (ATTN: George Kydd)
Code 60B1
Warminster, PA 18974

Human Factors Engineering Division
Acft & Crew Systems Tech Dir
Naval Air Development Center
Warminster, PA 18974

Naval Air Development Center
Technical Information Division
Technical Support Department
Warminster, PA 18974

Commander
Naval Air Development Center
ATTN: Code 6022 (Mr. Brindle)
Warminster, PA 18974

Dr. E. Hendler
Human Factors Applications, Inc.
295 West Street Road
Warminster, PA 18974

Director
Army Audiology & Speech Center
Walter Reed Army Medical Center
Washington, DC 20307-5001

Director
Walter Reed Army Institute
of Research
Washington, DC 20012

Commander
US Army Institute of
Dental Research
Walter Reed Army Medical Center
Washington, DC 20012

Uniformed Services University
of the Health Sciences
4301 Jones Bridge Road
Bethesda, MD 20014

Commanding Officer
Naval Medical R&D Center
National Naval Medical Center
Bethesda, MD 20014

Under Secretary of Defense for
Research and Engineering
ATTN: Military Assistant for
Med & Life Sciences
Washington, DC 20301

Director of Professional Services
Office of the Surgeon General
Department of the Air Force
Washington, DC 20314

Naval Air Systems Command
Technical Library Air 950D
Room 278, Jefferson Plaza II
Department of the Navy
Washington, DC 20361

US Navy
Naval Research Laboratory Library
Code 1433
Washington, DC 20375

US Navy
Naval Research Laboratory Library
Shock & Vibration Information Center
Code 8404
Washington, DC 20375

Harry Diamond Laboratories
ATTN: Technical Information Branch
2800 Powder Mill Road
Adelphi, MD 20783-1197

Director
US Army Human Engineering Laboratory
ATTN: Technical Library
Aberdeen Proving Ground, MD
21005-5001

US Army Materiel Systems
Analysis Agency
ATTN: Reports Processing
Aberdeen Proving Ground, MD
21005-5017

US Army Ordnance Center
and School Library
Aberdeen Proving Ground, MD
21005-5201

Director
US Army Ballistic Rsch Laboratory
ATTN: DRXBR-OD-ST (Tech Rpts)
Aberdeen Proving Ground, MD
21005-5066

US Army Environmental Hygiene
Agency Library, Bldg E2100
Aberdeen Proving Ground, MD
21010

Commander
US Army Medical Research
Institute of Chemical Defense
Aberdeen Proving Ground, MD
21010

Technical Library
Chemical Systems Laboratory
Aberdeen Proving Ground, MD
21010

Commander
US Army Medical R&D Command
ATTN: SGRD-RMS (Mrs. Madigan)
Fort Detrick
Frederick, MD 21701

Commander
US Army Medical Research Institute
of Infectious Diseases
Fort Detrick
Frederick, MD 21701

Commander
US Army Medical Bioengineering
R&D Laboratory
Fort Detrick
Frederick, MD 21701

Director of Biological and
Medical Sciences Division
800 North Quinch Street
Arlington, VA 22217

Defense Technical
Information Center
Cameron Station, VA 22314

US Army Materiel Development and
Readiness Command
ATTN: DRCSG
5001 Eisenhower Avenue
Alexandria, VA 22333

US Army Foreign Science and
Technology Center
ATTN: DRXST-IS1
220 7th Street, NE
Charlottesville, VA 22901

Commander
US Army Transportation School
ATTN: ATSP-TD-ST
Fort Eustis, VA 23604

Director
Applied Technology Lab, USARTL-AVSCOM
ATTN: Library, Bldg 401
Fort Eustis, VA 23604

US Army Training & Doctrine Command
ATTN: ATCD
Fort Monroe, VA 23651

Commander
US Army Training & Doctrine Command
ATTN: Surgeon
Fort Monroe, VA 23651

Structures Laboratory Library
USARTL-AVSCOM
NASA Langley Research Center
Mail Stop 266
Hampton, VA 23665

US Navy
Naval Aerospace Medical
Institute Library
Bldg 1953, Code 102
Pensacola, FL 32508

US Air Force
Armament Development and
Test Center
Eglin AFB, FL 32542

Colonel Stanley C. Knapp
US Centrol Command
CCSG MacDill AFB, FL 33608

Redstone Scientific Information
Center
DRDMI-TBD
US Army Missile R&D Command
Redstone Arsenal, AL 35809

Air University Library
(AUL/LSE)
Maxwell AFB, AL 36112

Commander
US Army Aeromedical Center
Fort Rucker, AL 36362

Commander
USAAVNC & Fort Rucker
ATTN: ATZQ-CDR
Fort Rucker, AL 36362

Director
Directorate of Combat Developments
Building 507
Fort Rucker, AL 36362

Director
Directorate of Training Development
Building 502
Fort Rucker, AL 36362

Chief
Army Research Institute
Field Unit
Fort Rucker, AL 36362

Commander
US Army Safety Center
Fort Rucker, AL 36362

Commander
USAAVNC & Fort Rucker
ATTN: ATZQ-T-ATL
Fort Rucker, AL 36362

Commander
US Army Aircraft Development
Test Activity
ATTN: STEBG-MP-QA
Cairns Army Air Field
Fort Rucker, AL 36362

President
US Army Aviation Board
Cairns Army Air Field
Fort Rucker, AL 36362

US Army Research and
Technology Laboratories
Propulsion Laboratory MS 77-5
NASA Lewis Research Center
Cleveland, OH 44135

Human Engineering Division
Air Force Aerospace Medical
Research Laboratory
ATTN: Technical Librarian
Wright-Patterson AFB, OH 45433

US Air Force Institute of
Technology (AFIT/LDE)
Building 640, Area B
Wright-Patterson AFB, OH 45433

John A. Dellinger, MS, ATP
Univ of Illinois - Willard Airport
Savoy, IL 61874

Henry L. Taylor
Director
Institute of Aviation
Univ of Illinois - Willard Airport
Savoy, IL 61874

Commander
US Army Troop Support and Aviation
Materiel Readiness Command
ATTN: DRSTS-W
St. Louis, MO 63102

Commander
US Army Aviation Systems Command
(Provisional)
ATTN: SGRD-UAX-AL (MAJ Lacy)
4300 Goodfellow Boulevard
St. Louis, MO 63166

Commander
US Army Aviation Systems Command
(Provisional)
ATTN: DDRAV-E
4300 Goodfellow Boulevard
St. Louis, MO 63166

Commander
US Army Aviation Systems Command
(Provisional)
ATTN: Library
4300 Goodfellow Boulevard
St. Louis, MO 63166

Commanding Officer
Naval Biodynamics Laboratory
PO Box 24907
Michoud Station
New Orleans, LA 70129

Federal Aviation Administration
Civil Aeromedical Institute
ATTN: Library
Box 25082
Oklahoma City, OK 73125

US Army Field Artillery School
ATTN: Library
Snow Hall, Room 14
Fort Sill, OK 73503

Commander
US Army Academy of Health Sciences
ATTN: Library
Fort Sam Houston, TX 78234

Commander
US Army Health Services Command
ATTN: Library
Fort Sam Houston, TX 78234

Commander
US Army Institute of
Surgical Research
ATTN: SGRD-USM (Jan Duke)
Fort Sam Houston, TX 78234-6200

US Air Force
Aerospace Medical Division
School of Aerospace Medicine
Aeromedical Library/TSK-4
Brooks AFB, TX 78235

US Army
Dugway Proving Ground
Technical Library
Building 5330
Dugway, UT 84022

Dr. Diane Damos
Psychology Department
Arizona State University
Tempe, AZ 85287

US Army Yuma Proving Ground
Technical Library
Yuma, AZ 85364

US Army White Sands Missile Range
Technical Library Division
White Sands Missile Range
New Mexico 88002

US Air Force
Flight Test Center
Technical Library, Stop 238
Edwards AFB, CA 93523

US Army Aviation Engineering
Flight Activity
ATTN: DAVTE-M (Technical Library)
Edwards AFB, CA 93523

US Navy
Naval Weapons Center
Technical Library Division
Code 2333
China Lake, CA 93555

US Army Combat Developments
Experimental Command
Technical Library
HQ, USACDEC
Box 22
Fort Ord, CA 93941

Aeromechanics Laboratory
US Army Research and
Technical Laboratories
Ames Research Center, M/S 215-1
Moffett Field, CA 94035

Commander
Letterman Army Institute of Research
ATTN: Medical Research Library
Presidio of San Francisco, CA
94129

Six United States Army
ATTN: SMA
Presidio of San Francisco, CA
94129

Director
Naval Biosciences Laboratory
Naval Supply Center, Bldg 844
Oakland, CA 94625

Canadian Army Liaison Officer
Building 602
Fort Rucker, AL 36362

Netherlands Army Liaison Officer
Building 602
Fort Rucker, AL 36362

German Army Liaison Officer
Building 602
Fort Rucker, AL 36362

British Army Liaison Officer
Building 602
Fort Rucker, AL 36362

French Army Liaison Officer
Building 602
Fort Rucker, AL 36362

COL G. Stebbing
DAO-AMLOUS B
Box 36, US Embassy
FPO New York 09510

National Defence Headquarters
101 Colonel By Drive
Ottawa, Ontario, Canada
K1A 0K2
ATTN: DPM

Staff Officer, Aerospace Medicine
RAF Staff
British Embassy
3100 Massachusetts Avenue, NW
Washington, DC 20008

Department of Defence
R.A.N. Research Laboratory
PO Box 706
Darlinghurst, N.S.W. 2010
Australia

Canadian Society of Aviation Medicine
c/o Academy of Medicine, Toronto
ATTN: Ms. Carmen King
288 Bloor Street West
Toronto, Ontario, Canada
M5S 1V8

Canadian Airline Pilot's Association
MAJ J. Soutendam (Ret)
1300 Steeles Avenue East
Brampton, Ontario, Canada
L6T 1A2

Canadian Forces Medical Liaison
Officer
Canadian Defence Liaison Staff
2450 Massachusetts Avenue, NW
Washington, DC 20008

Commanding Officer
404 Maritime Training Squadron
Canadian Forces Base Greenwood
Greenwood, Nova Scotia, Canada
B0P 1N0
ATTN: Aeromed Training Unit

Officer Commanding
School of Operational and
Aerospace Medicine
DCIEM
1133 Sheppard Avenue West
Downsview, Ontario, Canada
M3M 3B9

END

FILMED

9-84

DTIC