

AD A 144 761

TECHNICAL REPORT ARBRL-TR-02570

CONSTRUCTION OF APPROXIMATE CONFIDENCE  
INTERVALS FOR PROBABILITY-OF-KILL  
VIA THE BOOTSTRAP

Malcolm S. Taylor  
Barry A. Bodt

July 1984



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER  
**BALLISTIC RESEARCH LABORATORY**  
ABERDEEN PROVING GROUND, MARYLAND

Approved for public release; distribution unlimited.

Destroy this report when it is no longer needed.  
Do not return it to the originator.

Additional copies of this report may be obtained  
from the National Technical Information Service,  
U. S. Department of Commerce, Springfield, Virginia  
22161.

The findings in this report are not to be construed as an official  
Department of the Army position, unless so designated by other  
authorized documents.

The use of trade names or manufacturers' names in this report  
does not constitute indorsement of any commercial product.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE   |                       | READ INSTRUCTIONS<br>BEFORE COMPLETING FORM  |
|---|-----------------------|--|
| 1. REPORT NUMBER<br>TECHNICAL REPORT ARBRL-TR-02570   | 2. GOVT ACCESSION NO. | 3. RECIPIENT'S CATALOG NUMBER  |
| 4. TITLE (and Subtitle)<br>CONSTRUCTION OF APPROXIMATE CONFIDENCE INTERVALS<br>FOR PROBABILITY-OF-KILL VIA THE BOOTSTRAP  |                       | 5. TYPE OF REPORT & PERIOD COVERED   |
|   |                       | 6. PERFORMING ORG. REPORT NUMBER   |
| 7. AUTHOR(s)<br>Malcolm S. Taylor<br>Barry A. Bodt  |                       | 8. CONTRACT OR GRANT NUMBER(s)   |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br>US Army Ballistic Research Laboratory<br>ATTN: DRXBR-SECAD<br>Aberdeen Proving Ground, MD 21005-5066   |                       | 10. PROGRAM ELEMENT, PROJECT, TASK<br>AREA & WORK UNIT NUMBERS<br><br>RDT&E 1L161102AH43 |
| 11. CONTROLLING OFFICE NAME AND ADDRESS<br>US Army Ballistic Research Laboratory<br>ATTN: DRXBR-OD-ST<br>Aberdeen Proving Ground, MD 21005-5066   |                       | 12. REPORT DATE<br>July 1984   |
|   |                       | 13. NUMBER OF PAGES<br>30  |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)   |                       | 15. SECURITY CLASS. (of this report)<br><br>UNCLASSIFIED                                 |
|   |                       | 15a. DECLASSIFICATION/DOWNGRADING<br>SCHEDULE  |
| 16. DISTRIBUTION STATEMENT (of this Report)<br>Approved for public release; distribution unlimited.   |                       |  |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)  |                       |  |
| 18. SUPPLEMENTARY NOTES   |                       |  |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number)<br><br>Bootstrap<br>Confidence Interval<br>Nonparametric<br>Statistics   |                       |  |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number)<br>The bootstrap, a computer-intensive procedure for data analysis, was applied to an estimation problem to enable a statement to be made about the variability inherent in a probability-of-kill estimate $P_k$ . The bootstrap was applied to a stratified sample rather than a simple random sample and its performance evaluated in this framework, first in an abstract situation where the parameter $P_k$ was known and then in three situations where the parameter $P_k$ was unknown, but an estimate provided by current vulnerability analysis procedures was available.<br>(Cont'd) |                       |  |

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Item 20, Continued.

The investigation was carried out for several grid sizes, or alternatively, for several levels of detail, to study the effect of grid size on the estimation of  $P_k$  and the reliability of the confidence intervals constructed.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

|   | Page |
|---|------|
| LIST OF ILLUSTRATIONS. . . . .  | 5    |
| LIST OF TABLES . . . . .  | 7    |
| 1. INTRODUCTION . . . . .   | 9    |
| 2. ESTIMATION OF VULNERABLE AREA AND PROBABILITY OF KILL. . . . .       | 11   |
| 3. THE PERCENTILE METHOD FOR CONFIDENCE INTERVAL CONSTRUCTION . . . . . | 13   |
| 4. APPLICATIONS . . . . .   | 13   |
| 4.1. Surrogate Target . . . . .   | 13   |
| 4.2. Armored Personnel Carrier. . . . .                                 | 19   |
| 4.3. Tank . . . . .   | 21   |
| 4.3.1. Unweighted Procedure . . . . .                                   | 23   |
| 4.3.2. Weighted Procedure . . . . .                                     | 24   |
| 5. SUMMARY AND CONCLUSIONS. . . . .                                     | 28   |
| ACKNOWLEDGEMENT. . . . .  | 28   |
| DISTRIBUTION LIST. . . . .  | 29   |

## LIST OF ILLUSTRATIONS

| Figure  | Page |
|---|------|
| 1. Surrogate target description. . . . .                              | 12   |
| 2. Flow chart for the bootstrap computation. . . . .                  | 15   |
| 3. One hundred bootstrapped confidence intervals . . . . .            | 16   |
| 4. Data summary for the surrogate target . . . . .                    | 18   |
| 5. Armored personnel carrier target description. . . . .              | 20   |
| 6. Data summary for an armored personnel carrier . . . . .            | 21   |
| 7. Tank target description . . . . .                                  | 22   |
| 8. Data summary for the tank (uniform case). . . . .                  | 24   |
| 9. Data summary for the tank (Normal case, $\sigma = 1'$ ) . . . . .  | 25   |
| 10. Data summary for the tank (Normal case, $\sigma = 3'$ ) . . . . . | 26   |
| 11. Data summary for the tank (Normal case, $\sigma = 9'$ ) . . . . . | 27   |

## LIST OF TABLES

| Table   | Page |
|---|------|
| 1. Number of Confidence Intervals Covering the Parameter<br>Surrogate Target. . . . .                   | 16   |
| 2. Mean Width of Confidence Intervals. Surrogate Target . . . . .                                       | 17   |
| 3. Number of Confidence Intervals Covering the Parameter<br>Armored Personnel Carrier . . . . .         | 19   |
| 4. Mean Width of Confidence Intervals. Armored Personnel Carrier. .                                     | 19   |
| 5. Number of Confidence Intervals Covering the Parameter<br>Unweighted Procedure. . . . .               | 23   |
| 6. Mean Width of Confidence Intervals. Unweighted Procedure . . . .                                     | 23   |
| 7. Number of Confidence Intervals Covering the Parameter<br>Weighted Procedure, $\sigma = 1$ . . . . .  | 25   |
| 8. Mean Width of Confidence Intervals<br>Weighted Procedure, $\sigma = 1$ . . . . .                     | 25   |
| 9. Number of Confidence Intervals Covering the Parameter<br>Weighted Procedure, $\sigma = 3$ . . . . .  | 26   |
| 10. Mean Width of Confidence Intervals<br>Weighted Procedure, $\sigma = 3$ . . . . .                    | 26   |
| 11. Number of Confidence Intervals Covering the Parameter<br>Weighted Procedure, $\sigma = 9$ . . . . . | 27   |
| 12. Mean Width of Confidence Intervals<br>Weighted Procedure, $\sigma = 9$ . . . . .                    | 27   |

## 1. INTRODUCTION

The bootstrap, so named by Efron<sup>1</sup> to convey its self-help attributes, is a conceptually simple technique. It is one of a number of procedures known as resampling plans whose goal is to extract information from a set of data through repeated inspection. Although the theoretical foundation is incomplete and many of the available results are empirical, this is an area of active research that will grow in importance as computation becomes faster and cheaper.

The bootstrap attempts to address an important statistical problem: having computed an estimate of some parameter, say a mean or a probability or a correlation, what accuracy can be attached to the estimate? Accuracy refers to the "± something" that often accompanies statistical estimates and is commonly conveyed through such devices as variance, standard error, confidence interval, etc..

Before detailing the mechanics of the bootstrap procedure, it is instructive to study the following simple example.

Consider a data set consisting of a random sample of size  $n$  from an unknown probability distribution  $F$  on the real line,  $X_1, X_2, \dots, X_n \sim F$ . Having observed  $X_1 = x_1, X_2 = x_2, \dots, X_n = x_n$ , the sample mean  $\bar{x} = \frac{1}{n} \sum_{i=1}^n x_i$  is computed for use as an estimate of the distribution mean  $\mu$ .

A crucial fact is that the sample values  $x_1, x_2, \dots, x_n$  contain more information than the estimate  $\bar{x}$ . They also provide an estimate for the accuracy of  $\bar{x}$ , namely

$$\hat{\sigma} = \left[ \frac{1}{n(n-1)} \sum_{i=1}^n (x_i - \bar{x})^2 \right]^{\frac{1}{2}}, \quad (1)$$

the standard error of  $\bar{x}$ . Unfortunately, equation (1) has no obvious extension to estimators other than  $\bar{x}$ . The bootstrap is one method of making this extension.

Let  $\hat{F}$  be the empirical distribution of the data with probability mass  $\frac{1}{n}$  assigned to each  $x_i$  and let  $X_1^*, X_2^*, \dots, X_n^*$  be a random sample from  $\hat{F}$ . In other words, each  $x_i^*$  is drawn independently with replacement from the set  $\{x_1, x_2, \dots, x_n\}$ . The bootstrap estimate of standard error for an estimator  $\hat{\theta}(X_1, X_2, \dots, X_n)$  is

$$\hat{\sigma}_B = \{Var [\hat{\theta}(X_1^*, X_2^*, \dots, X_n^*)]\}^{\frac{1}{2}}. \quad (2)$$

---

<sup>1</sup> B. Efron, "Bootstrap methods: another look at the jackknife," *Ann. Statist.*, 7(1979), pp. 1-26.

Comparison of (2) with (1) shows that

$$\left[ \frac{n}{n-1} \right]^{\frac{1}{2}} \cdot \hat{\sigma}_B = \hat{\sigma} \quad \text{for } \hat{\theta} = \bar{x}; \quad (3)$$

i.e.,  $\hat{\sigma}_B$  is a biased estimator.

Consider the random sample  $X_1, X_2, \dots, X_n \sim F$  and an estimator  $\hat{\theta}(X_1, X_2, \dots, X_n)$ . The standard error of  $\hat{\theta}$  depends on the distribution  $F$ , i.e.,  $\sigma(F) = [Var_F \hat{\theta}(X_1, X_2, \dots, X_n)]^{\frac{1}{2}}$ . It also depends on the sample size  $n$  and the functional form of  $\hat{\theta}$ , both of which are known. What is not known is  $F$ , but it can be estimated by  $\hat{F}$ . The bootstrap estimate of  $\sigma(F)$  is then  $\hat{\sigma}_B = \sigma(\hat{F})$ , as expressed in equation (2).

In most cases of interest  $\sigma(F)$  is impossible to express in closed form. Fortunately,  $\hat{\sigma}_B$  may be approximated by Monte Carlo methods as follows:

- (i) Construct the empirical distribution  $\hat{F}$  from the sampled values  $\{x_1, x_2, \dots, x_n\}$ ;
- (ii) Draw a bootstrap sample  $X_1^*, X_2^*, \dots, X_n^*$  by sampling with replacement from  $\hat{F}$  and calculate  $\hat{\theta}(X_1^*, X_2^*, \dots, X_n^*)$ ;
- (iii) Repeat (ii)  $B$  times, obtaining independent bootstrap replications  $\hat{\theta}^{*1}, \hat{\theta}^{*2}, \dots, \hat{\theta}^{*B}$ , and finally,
- (iv) Compute

$$Est \hat{\sigma}_B = \left[ \frac{1}{B-1} \sum_{b=1}^B (\hat{\theta}^{*b} - \hat{\theta}^*)^2 \right]^{\frac{1}{2}} \quad (4)$$

where  $\hat{\theta}^* = \frac{1}{B} \sum_{b=1}^B \hat{\theta}^{*b}$ . As  $B \rightarrow \infty$ , (4) approaches (2).

The bootstrap procedure is far more general than has been indicated. As a matter of fact, the standard error, which has been the focus of attention, need not play a pivotal role. To illustrate this, consider a general one-sample problem in which  $Z(X, F)$  is a random variable and the vector  $X = (X_1, X_2, \dots, X_n)$  represents a random sample from the distribution  $F$ . Based on an observed  $X = x$ , some aspect of the distribution of  $Z$ , e.g.,  $E_F Z$ ,  $Pr_F\{Z < z\}$ ,  $Z_{.50}$ , is to be estimated. The bootstrap procedure (i)-(iv) remains essentially unchanged; at step (ii)  $Z^* = Z(X^*, \hat{F})$  is calculated as  $\hat{\theta}$  and at step (iv) the aspect of the distribution of  $Z$  which is of interest is calculated, rather than an estimate of standard

error. An application of the bootstrap procedure to confidence interval construction will be the subject of Section 3 of this report.

## 2. ESTIMATION OF VULNERABLE AREA AND PROBABILITY OF KILL

Consider the conceptual item of military hardware illustrated in Figure 1. Without loss of generality, the component edges are assumed to be aligned with the superimposed 30x30 rectangular grid. The color in the  $i$ th cell represents the probability  $P_{k|h_i}$  that the target will be killed should a prescribed round of ammunition fired from a fixed range and orientation impact within that cell.

The vulnerable area  $A_v$  for the target is calculated by

$$A_v = \sum_i P_{k|h_i} A_i = A \sum_i P_{k|h_i} \quad (5)$$

where  $i$  is indexed over the cells of the grid. In this example, the cell areas are identical, i.e.,  $A_1 = A_2 = \dots = A$ . The overall probability of kill  $P_k$  is

$$P_k = \frac{A_v}{A_p} \quad (6)$$

where  $A_p$  is the total presented area of the target. For the conceptual target shown in Figure 1, the exact values of vulnerable area and probability of kill are  $A_v = 188.1$  and  $P_k = 0.21$ .

In practice, the values  $P_{k|h_i}$  are unknown, and estimates  $\hat{P}_{k|h_i}$  are required to obtain the approximations

$$\hat{A}_v = A \sum_i \hat{P}_{k|h_i}, \quad (7)$$

$$\hat{P}_k = \frac{\hat{A}_v}{A_p}. \quad (8)$$

The method by which the values  $\hat{P}_{k|h_i}$  are produced will not be considered here. Determining valid  $P_{k|h_i}$  estimates is a persistent problem because of the difficulty in modeling the underlying damage mechanisms and constitutes an additional source of uncertainty. The procedure used here assumes the individual  $\hat{P}_{k|h_i}$ 's are accurately represented and does not attempt to assign a component of variation due to this factor.

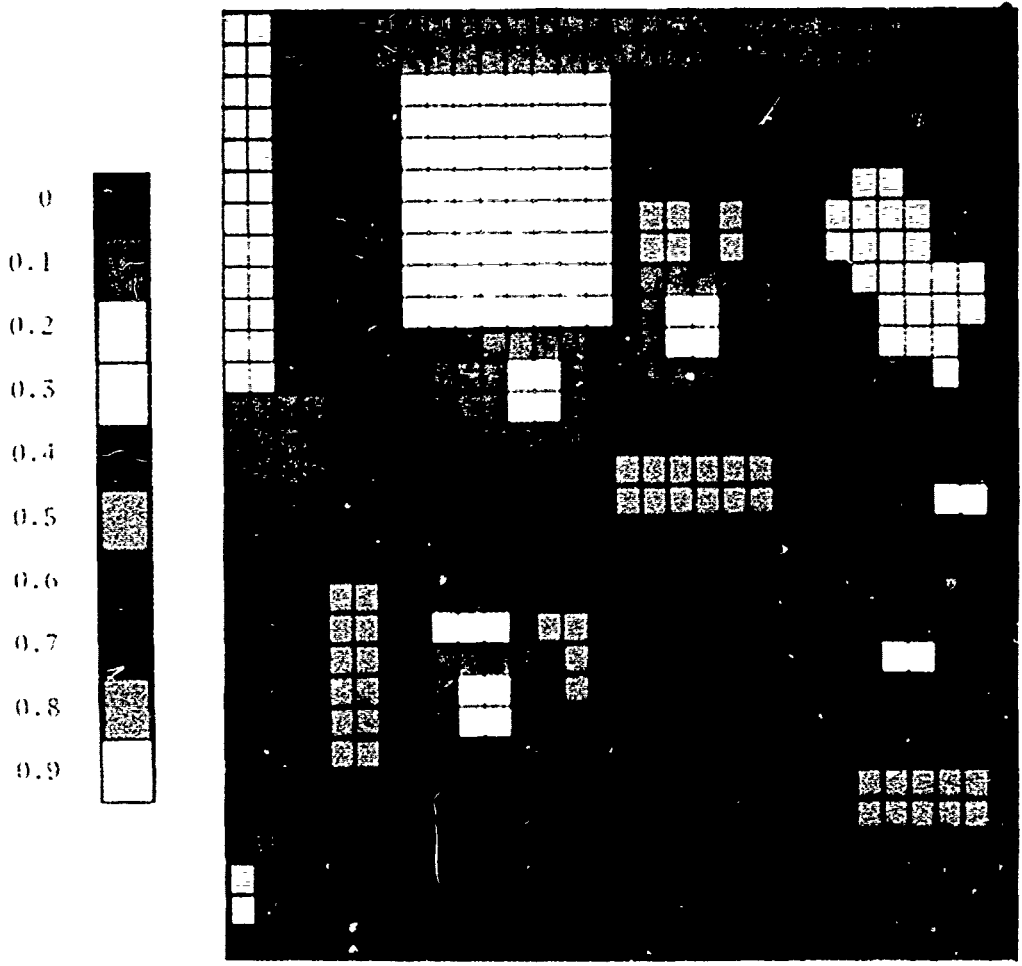


Figure 1. Surrogate target description.

### 3. THE PERCENTILE METHOD FOR CONFIDENCE INTERVAL CONSTRUCTION

The bootstrap procedure was applied to construct an approximate confidence interval for the parameter  $P_k$ . A *percentile method*<sup>2</sup> was used which allows an approximate confidence interval to be assigned to any real-valued parameter  $\theta = \theta(F)$  based on the bootstrap distribution of  $\hat{\theta} = \theta(\hat{F})$ .

Let

$$\hat{F}(t) = Pr \cdot \{ \hat{\theta}^* \leq t \} \quad (9)$$

be the probability distribution of  $\hat{\theta}^*$ . For  $0 \leq \alpha \leq 0.5$ , define

$$\hat{\theta}_{low}(\alpha) = \hat{F}^{-1}(\alpha), \quad \hat{\theta}_{up}(\alpha) = \hat{F}^{-1}(1-\alpha). \quad (10)$$

An approximate  $1 - 2\alpha$  central confidence interval for  $\theta$  may then be chosen as

$$[\hat{\theta}_{low}(\alpha), \hat{\theta}_{up}(\alpha)], \quad (11)$$

which is the central  $1 - 2\alpha$  portion of the distribution of bootstrapped  $\hat{\theta}^*$ . Under Monte Carlo sampling,

$$\hat{F}(t) \approx \frac{N\{\hat{\theta}^{*b} \leq t\}}{B} \quad (12)$$

where the operator  $N\{ \}$  denotes the cardinality of the set. This approximation was used to evaluate the confidence interval (11).

### 4. APPLICATIONS

#### (4.1) Surrogate Target

The percentile method was applied to construct a confidence interval for the parameter  $P_k$  corresponding to the target in Figure 1. A random location within each cell of the 30x30 grid was selected and the corresponding  $P_k|_{h_i}$  determined. This is consistent with vulnerability methodology but represents a departure from step (ii) of the usual bootstrap procedure in that sampling within each grid cell produces a stratified sample with one observation per strata and not a simple random sample. This example was contrived to provide an instance in which the true parameter value ( $P_k = 0.21$ ) was known, and so the adopted strategy was to proceed as if  $P_k$  was unknown and observe how robust the bootstrap procedure was to departure from the usual sampling scheme.

<sup>2</sup> B. Efron, "The Jackknife, the Bootstrap and Other Resampling Plans," SIAM Monograph 38(1982).

After determining a random point of impact and its corresponding  $P_k|_{h_i}$ , for each cell  $i$ , the nine hundred  $P_k|_{h_i}$  formed the population which was then sampled with replacement to determine a bootstrap estimate  $P_k^*$  of the target parameter  $P_k$ . Estimate  $P_k^*$  was based on a sample size equal to the number of cells in the overlaid grid. The procedure of sampling with replacement was repeated until one thousand bootstrap estimates  $P_k^{*i}$ , were obtained. From the one thousand ordered estimates  $P_k^{*(1)} \leq P_k^{*(2)} \leq \dots \leq P_k^{*(1000)}$  a single confidence interval for  $P_k$  was constructed by the percentile method.

Since the overlaid grid and the vulnerability grid coincided in this example, repetition of the procedure beginning with determination of random within-cell locations would merely generate an identical population and no additional information would be gained. Therefore, the mesh of the overlaid grid was coarsened to induce within-cell variation. The procedure detailed in the preceding paragraph was then repeated one hundred times to determine one hundred (not necessarily distinct) populations from which to sample with replacement.

In general, for an overlaid grid of size  $n \times n$ , one hundred populations were determined. From each of the one hundred populations, one thousand bootstrapped  $P_k^*$  were generated and a corresponding confidence interval computed. Each bootstrapped  $P_k^*$  was based on a sample of size  $n^2$ . A flow chart of the computation is drawn in Figure 2.

An example of one hundred 70% confidence intervals constructed for the  $P_k$  for the target in Figure 1 is shown in Figure 3. Theoretically, a  $100(1-\alpha)\%$  confidence interval covers the true parameter value  $100(1-\alpha)\%$  of the time. In this example, the percentile method of confidence interval construction performs more conservatively than theory would suggest; the true  $P_k$  was covered 91% of the time. We suspect this is a consequence of the stratified sampling plan, but this remains an unproven conjecture.

The results of a simulation study for selected coarser grids on the target in Figure 1 are summarized in Tables 1 and 2 and displayed graphically in Figure 4. The entries in the body of Table 1 are the number of confidence intervals constructed by the percentile method that actually covered the true parameter value; e.g., for a grid of size  $10 \times 10$  the confidence interval  $[\hat{P}_k(.10), \hat{P}_k(.90)]$  covered the true parameter  $P_k$  ninety-six of a possible one hundred times. The average width of the one hundred confidence intervals appears at the corresponding location within Table 2 and for this example is .080. Notice again the apparent conservativeness of this procedure for the finer grid sizes; in this instance, an estimated 80% confidence interval behaves like a 96% confidence interval.

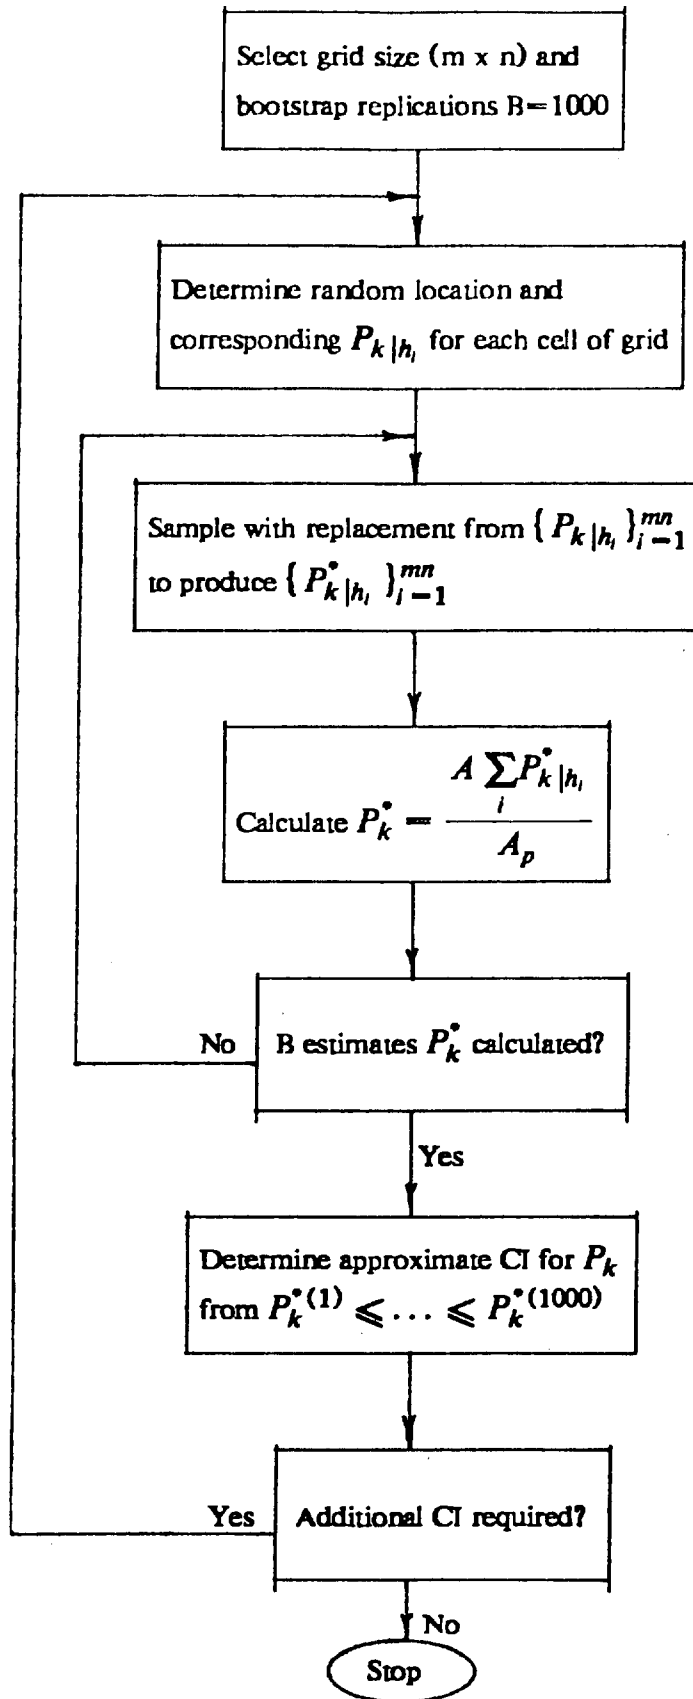


Figure 2. Flow chart for the bootstrap computation.

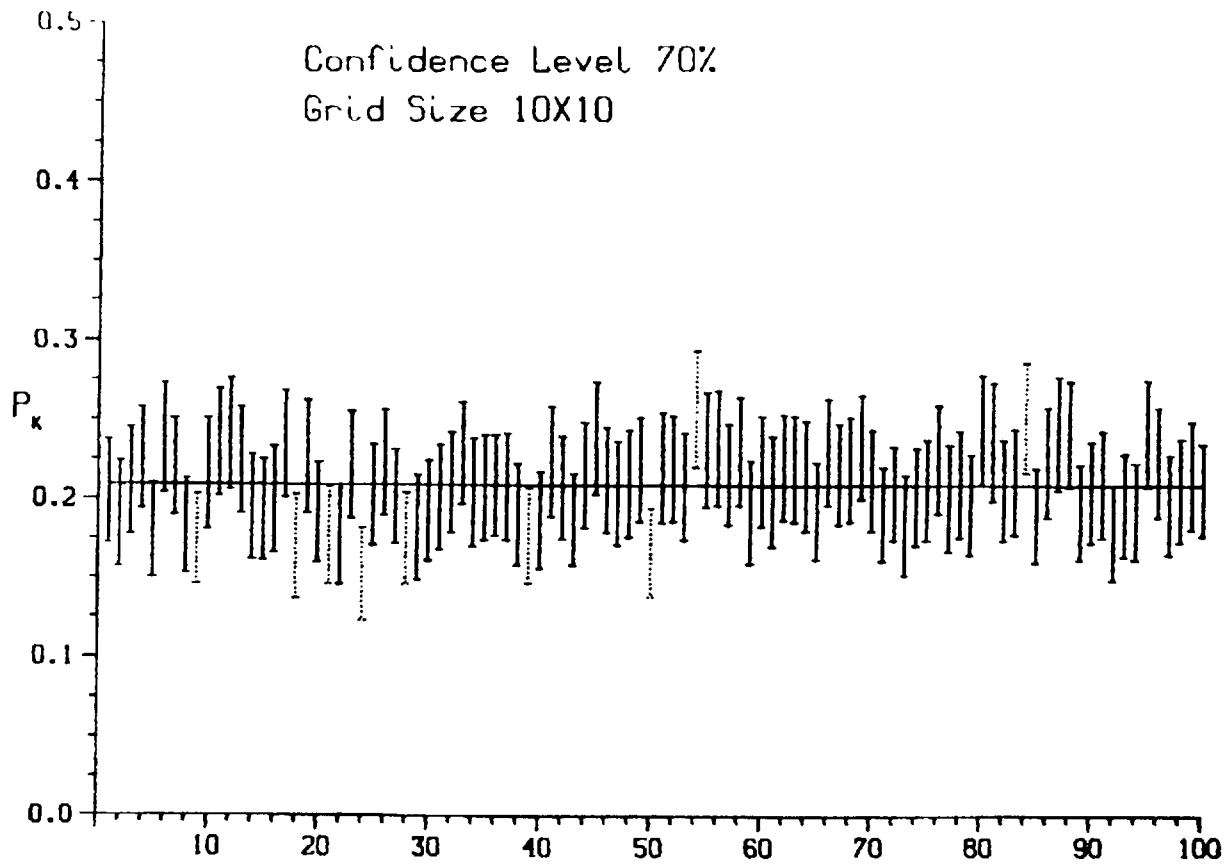


Figure 3. One hundred bootstrapped confidence intervals.

| <b>TABLE 1. NUMBER OF CONFIDENCE INTERVALS COVERING THE PARAMETER SURROGATE TARGET</b> |                                       |     |     |     |     |     |     |     |     |     |     |
|--|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Grid Size  | Inner Percentile Range (Central Area) |     |     |     |     |     |     |     |     |     |     |
|  | .99                                   | .95 | .90 | .80 | .70 | .60 | .50 | .40 | .30 | .20 | .10 |
| 15x15  | 100                                   | 100 | 100 | 100 | 93  | 88  | 80  | 68  | 53  | 38  | 15  |
| 10x10  | 100                                   | 100 | 99  | 96  | 91  | 80  | 72  | 57  | 46  | 31  | 18  |
| 6x6  | 100                                   | 100 | 99  | 91  | 84  | 72  | 59  | 46  | 34  | 26  | 8   |
| 5x5  | 99                                    | 95  | 93  | 86  | 79  | 71  | 58  | 46  | 32  | 24  | 15  |
| 3x3  | 93                                    | 91  | 88  | 75  | 66  | 61  | 49  | 38  | 29  | 19  | 6   |
| 2x2  | 76                                    | 76  | 69  | 60  | 58  | 48  | 43  | 28  | 9   | 5   | 1   |

| TABLE 2. MEAN WIDTH OF CONFIDENCE INTERVALS<br>SURROGATE TARGET |                                       |      |      |      |      |      |      |      |      |      |      |
|---|---------------------------------------|------|------|------|------|------|------|------|------|------|------|
| Grid<br>Size  | Inner Percentile Range (Central Area) |      |      |      |      |      |      |      |      |      |      |
|   | .99                                   | .95  | .90  | .80  | .70  | .60  | .50  | .40  | .30  | .20  | .10  |
| 15x15   | .109                                  | .082 | .069 | .054 | .044 | .036 | .028 | .022 | .016 | .011 | .005 |
| 10x10   | .162                                  | .122 | .103 | .080 | .065 | .053 | .042 | .033 | .024 | .016 | .008 |
| 6x6   | .265                                  | .202 | .169 | .132 | .107 | .087 | .070 | .054 | .040 | .026 | .013 |
| 5x5   | .315                                  | .241 | .204 | .159 | .128 | .104 | .084 | .065 | .048 | .031 | .016 |
| 3x3   | .467                                  | .367 | .315 | .250 | .197 | .166 | .139 | .106 | .073 | .042 | .020 |
| 2x2   | .514                                  | .453 | .405 | .289 | .278 | .246 | .226 | .134 | .049 | .027 | .007 |

Figure 4 requires some explanation; displayed there are the combined data listed in Tables 1 and 2. Plotted along the x-axis is the mean width of the confidence interval appearing in the body of Table 2; plotted along the y-axis are the corresponding empirical confidence levels obtained from the entries of Table 1. Each segmented line in Figure 4 corresponds to a different grid size. The lines are ordered, the bottommost corresponding to the coarsest grid (2x2) up through the topmost, which corresponds to the finest grid (15x15).

Finally, along each segmented line, the different symbols correspond to the inner percentile ranges that appear in both Tables 1 and 2. The key for the percentile range symbols (which will be used hereafter in the presentation of data) appear below.

Inner Percentile Range (Central Area)

|     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| .99 | .95 | .90 | .80 | .70 | .60 | .50 | .40 | .30 | .20 | .10 |
| ○   | △   | +   | ×   | ◇   | ▽   | ⊠   | ✖   | ⊕   | ⊗   | ⊘   |

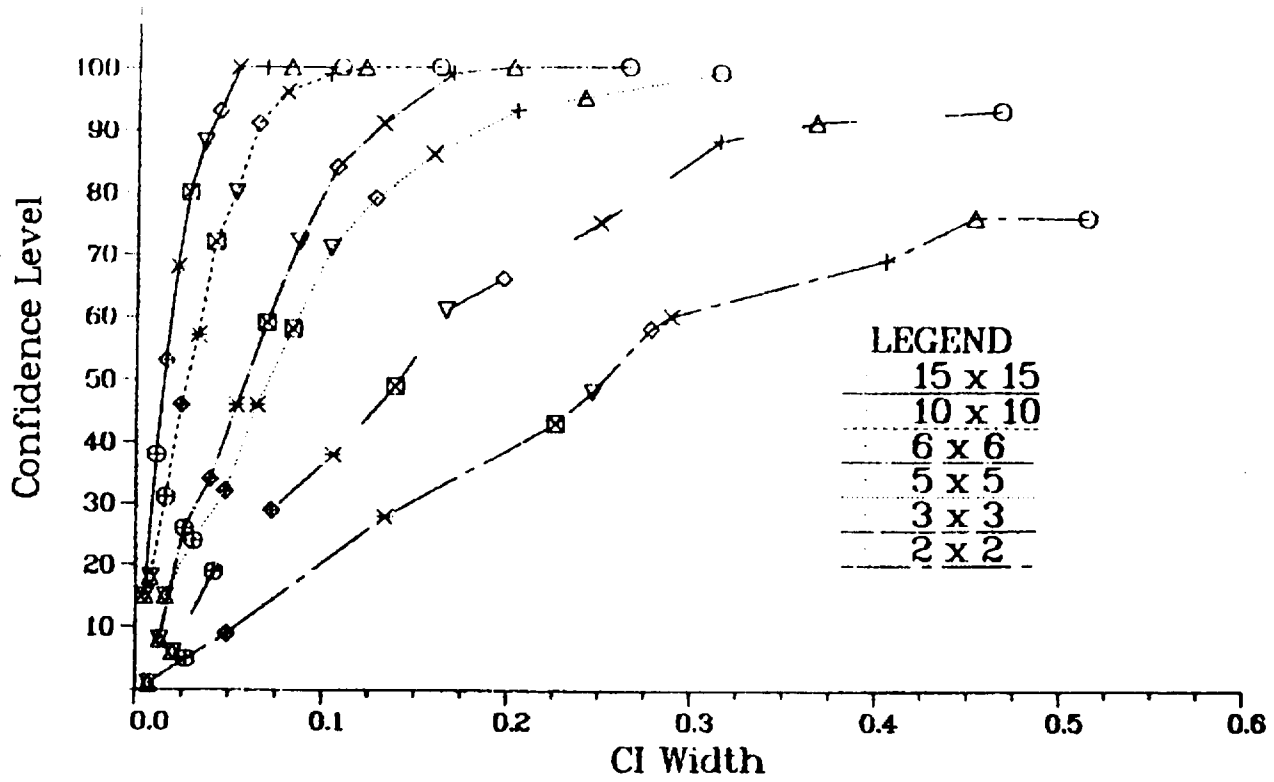


Figure 4. Data summary for the surrogate target.

(4.2) Armored Personnel Carrier

The target description shown in Figure 5 was used for a second application of the bootstrap procedure. This is a representation of an armored personnel carrier with a superimposed 48x120 vulnerability grid.<sup>3</sup> The finest mxn overlaid grid for the simulation study was 24x60; coarser grids of dimension 16x40, 12x30, 8x20, 6x15, 4x10, and 2x5 were studied. As in example 4.1, one thousand bootstrapped estimates of  $P_k$  were used to establish each of the one hundred CI's. Each of the one thousand estimates  $\hat{P}_k$  was based on a sample of size mn. Tables 3 - 4 and Figure 6 are analogous to Tables 1 - 2 and Figure 4 of example 4.1. The method of constructing approximate confidence intervals continues to appear conservative. Notice, in this example, the finest grid was not required to produce highly significant confidence intervals with small expected widths; e.g., for a 16x40 grid, the .90 inner percentile range covered the parameter every time with a mean width of .053.

| Grid Size | Inner Percentile Range (Central Area) |     |     |     |     |     |     |     |     |     |     |
|-----------|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|           | .99                                   | .95 | .90 | .80 | .70 | .60 | .50 | .40 | .30 | .20 | .10 |
| 24x60     | 100                                   | 100 | 100 | 100 | 100 | 98  | 87  | 74  | 61  | 49  | 28  |
| 16x40     | 100                                   | 100 | 100 | 99  | 98  | 94  | 87  | 80  | 65  | 55  | 35  |
| 12x30     | 100                                   | 100 | 100 | 100 | 95  | 88  | 79  | 68  | 51  | 37  | 22  |
| 8x20      | 100                                   | 99  | 99  | 95  | 88  | 80  | 68  | 56  | 40  | 30  | 15  |
| 6x15      | 100                                   | 100 | 97  | 90  | 83  | 75  | 66  | 52  | 45  | 30  | 20  |
| 4x10      | 100                                   | 96  | 94  | 85  | 78  | 70  | 62  | 50  | 39  | 24  | 17  |
| 2x5       | 98                                    | 94  | 91  | 80  | 66  | 59  | 50  | 37  | 31  | 19  | 10  |

| Grid Size | Inner Percentile Range (Central Area) |      |      |      |      |      |      |      |      |      |      |
|-----------|---------------------------------------|------|------|------|------|------|------|------|------|------|------|
|           | .99                                   | .95  | .90  | .80  | .70  | .60  | .50  | .40  | .30  | .20  | .10  |
| 24x60     | .056                                  | .042 | .035 | .027 | .022 | .018 | .014 | .011 | .008 | .005 | .003 |
| 16x40     | .084                                  | .063 | .053 | .041 | .033 | .027 | .022 | .017 | .012 | .008 | .004 |
| 12x30     | .112                                  | .084 | .071 | .055 | .044 | .036 | .029 | .023 | .016 | .011 | .005 |
| 8x20      | .167                                  | .127 | .106 | .083 | .067 | .054 | .043 | .034 | .025 | .016 | .008 |
| 6x15      | .221                                  | .168 | .141 | .109 | .089 | .072 | .058 | .045 | .033 | .022 | .011 |
| 4x10      | .330                                  | .250 | .210 | .163 | .132 | .108 | .086 | .067 | .049 | .033 | .016 |
| 2x5       | .615                                  | .477 | .403 | .316 | .258 | .208 | .167 | .131 | .097 | .062 | .029 |

<sup>3</sup> This schematic was provided by L.D. Losie, VLD, BRL.

0 1.0 .87 .5 .44 .4 .25 .2

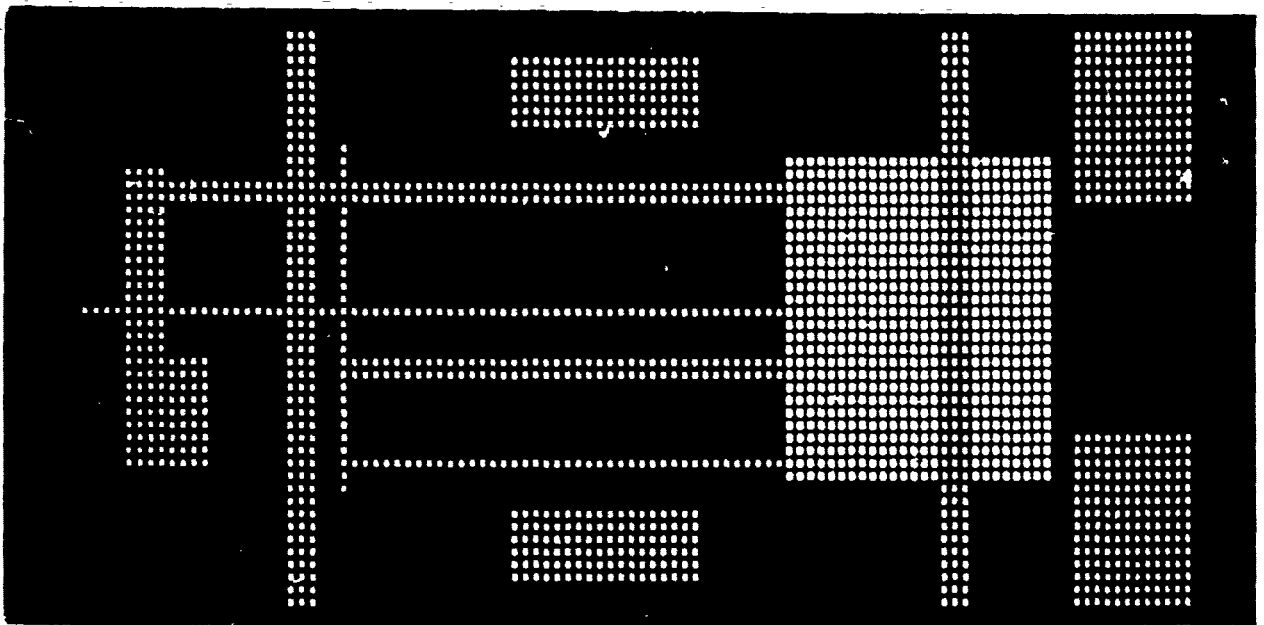


Figure 5. Armored personnel carrier target description.

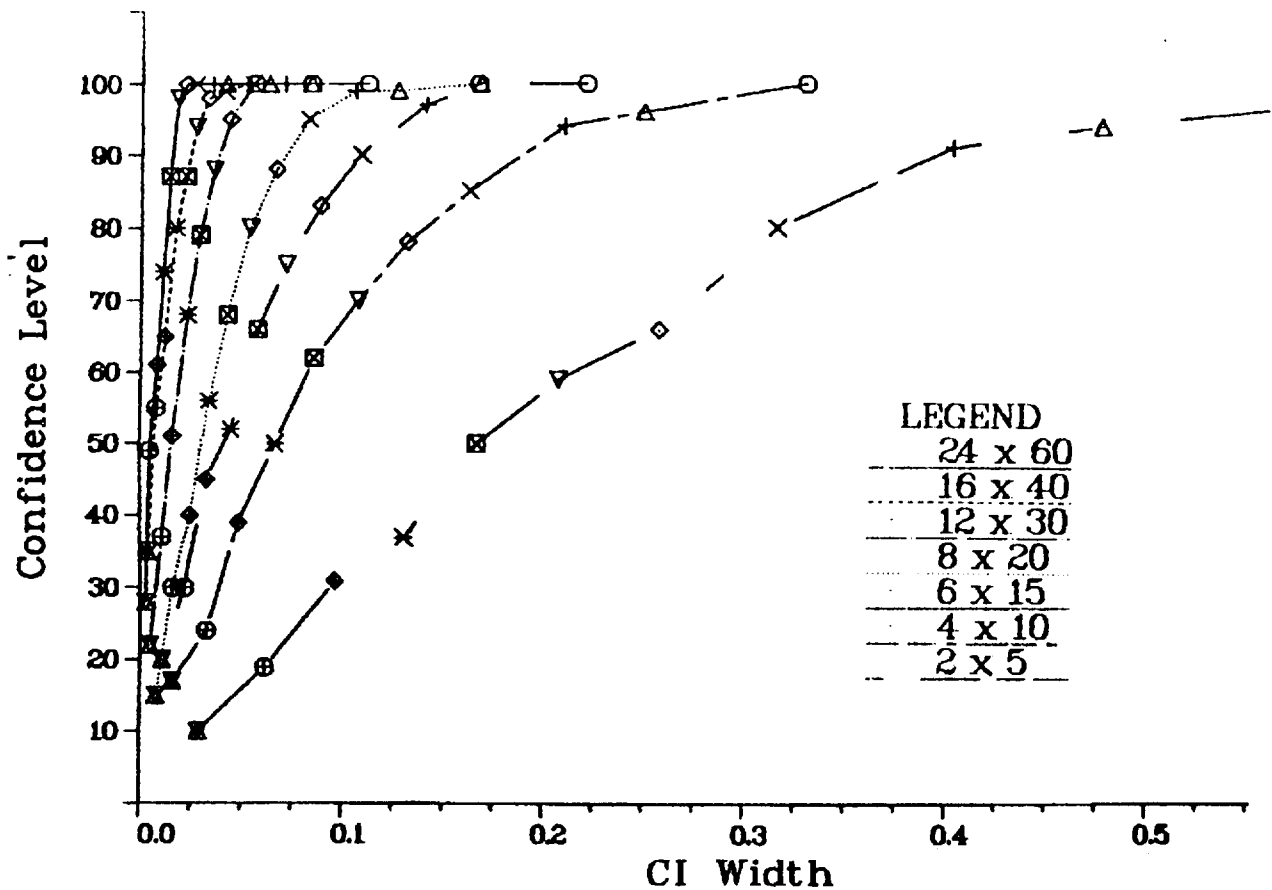


Figure 6. Data summary for an armored personnel carrier.

#### (4.3) Tank

The most detailed target description considered was selected for a third application. This target appears in Figure 7 with a superimposed 24x64 vulnerability grid.<sup>4</sup> The procedure for constructing approximate confidence intervals remains unchanged; however, the way in which the  $P_{k|h_i}$ 's enter into the computation (weighted and unweighted) of target  $P_k$  will be treated as two cases and discussed separately.

<sup>4</sup> This schematic was provided by H.W. Ege and L.D. Losie, VLD, BRL.



(4.3.1) Unweighted Procedure

The unweighted procedure was used in examples 4.1 and 4.2. A 24x64 vulnerability grid has been superimposed on the target and the  $P_{k|h_i}$  occupy the corresponding cell locations. One thousand bootstrapped estimates of  $P_k$  were used to determine each of one hundred CI's. Grid cells that were determined to be empty (the random within-cell location fell off the target) were ignored when calculating the individual  $\hat{P}_k$ , so the sample size corresponding to an estimate  $\hat{P}_k$  is no longer mn but mn less the number of empty cells. This value is of course dependent upon the grid size as well as the random within-cell locations.

The data summary for this part of the study is contained in Tables 5 - 6 and Figure 8.

| Grid Size | Inner Percentile Range (Central Area) |     |     |     |     |     |     |     |     |     |     |
|-----------|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|           | .99                                   | .95 | .90 | .80 | .70 | .60 | .50 | .40 | .30 | .20 | .10 |
| 12x32     | 100                                   | 100 | 100 | 100 | 99  | 94  | 90  | 79  | 64  | 55  | 34  |
| 6x16      | 100                                   | 99  | 98  | 91  | 84  | 76  | 68  | 57  | 43  | 33  | 14  |
| 3x8       | 98                                    | 98  | 98  | 93  | 86  | 76  | 65  | 60  | 47  | 29  | 16  |

| Grid Size | Inner Percentile Range (Central Area) |      |      |      |      |      |      |      |      |      |      |
|-----------|---------------------------------------|------|------|------|------|------|------|------|------|------|------|
|           | .99                                   | .95  | .90  | .80  | .70  | .60  | .50  | .40  | .30  | .20  | .10  |
| 12x32     | .111                                  | .083 | .070 | .054 | .044 | .036 | .029 | .022 | .016 | .011 | .005 |
| 6x16      | .218                                  | .165 | .138 | .108 | .088 | .071 | .057 | .044 | .032 | .021 | .011 |
| 3x8       | .431                                  | .332 | .278 | .217 | .177 | .144 | .115 | .091 | .066 | .044 | .022 |

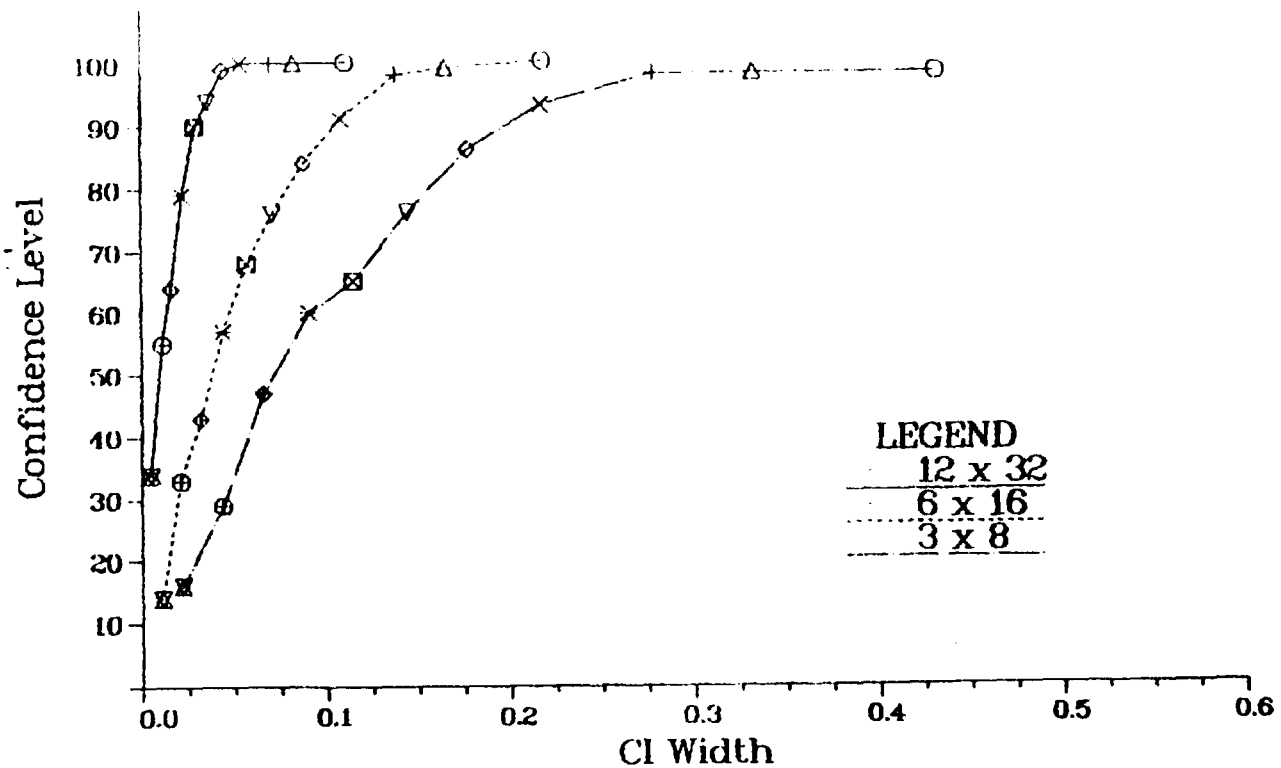


Figure 8. Data summary for the tank (uniform case).

#### (4.3.2) Weighted Procedure

Up to now, the tacit assumption has been that although  $P_{k|h_i}$  may change drastically from cell-to-cell, the probability of impact within all cells is the same. In other words, the rounds fall on the target according to a bivariate uniform distribution. The unweighted procedure for estimating  $P_k$  is modified for the target in Figure 7 when an aim point on the target is designated and the  $P_{k|h_i}$ 's are weighted by the probability of their occurrence.

The weight associated with an individual  $P_{k|h_i}$  is obtained by determining the probability  $P_{h_i}$  that a round will impact in the  $i$ th cell if the rounds fall according to a bivariate normal distribution centered at the aim point and having variance  $\sigma^2$ . The computational formula (5) becomes

$$A_v = A \sum_i P_{k|h_i} P_{h_i} \quad (13)$$

with

$$A_p = A \sum_i P_{h_i} \quad (14)$$

The data summary for the target in the weighted case is contained in Tables 7 - 8 and Figure 9 for  $\sigma=1$ , Tables 9 - 10 and Figure 10 for  $\sigma=3$ , and Tables 11 - 12 and Figure 11 for  $\sigma=9$ .

| Grid Size | Inner Percentile Range (Central Area) |     |     |     |     |     |     |     |     |     |     |
|-----------|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|           | .99                                   | .95 | .90 | .80 | .70 | .60 | .50 | .40 | .30 | .20 | .10 |
| 12x32     | 93                                    | 83  | 73  | 63  | 52  | 48  | 38  | 27  | 22  | 14  | 7   |
| 6x16      | 68                                    | 49  | 40  | 32  | 25  | 16  | 13  | 9   | 5   | 4   | 3   |
| 3x8       | 63                                    | 58  | 55  | 48  | 44  | 35  | 31  | 22  | 17  | 11  | 4   |

| Grid Size | Inner Percentile Range (Central Area) |      |      |      |      |      |      |      |      |      |      |
|-----------|---------------------------------------|------|------|------|------|------|------|------|------|------|------|
|           | .99                                   | .95  | .90  | .80  | .70  | .60  | .50  | .40  | .30  | .20  | .10  |
| 12x32     | .090                                  | .068 | .057 | .045 | .036 | .029 | .023 | .018 | .013 | .009 | .004 |
| 6x16      | .179                                  | .135 | .113 | .088 | .071 | .058 | .046 | .036 | .026 | .017 | .009 |
| 3x8       | .334                                  | .256 | .217 | .169 | .138 | .112 | .089 | .069 | .051 | .033 | .016 |

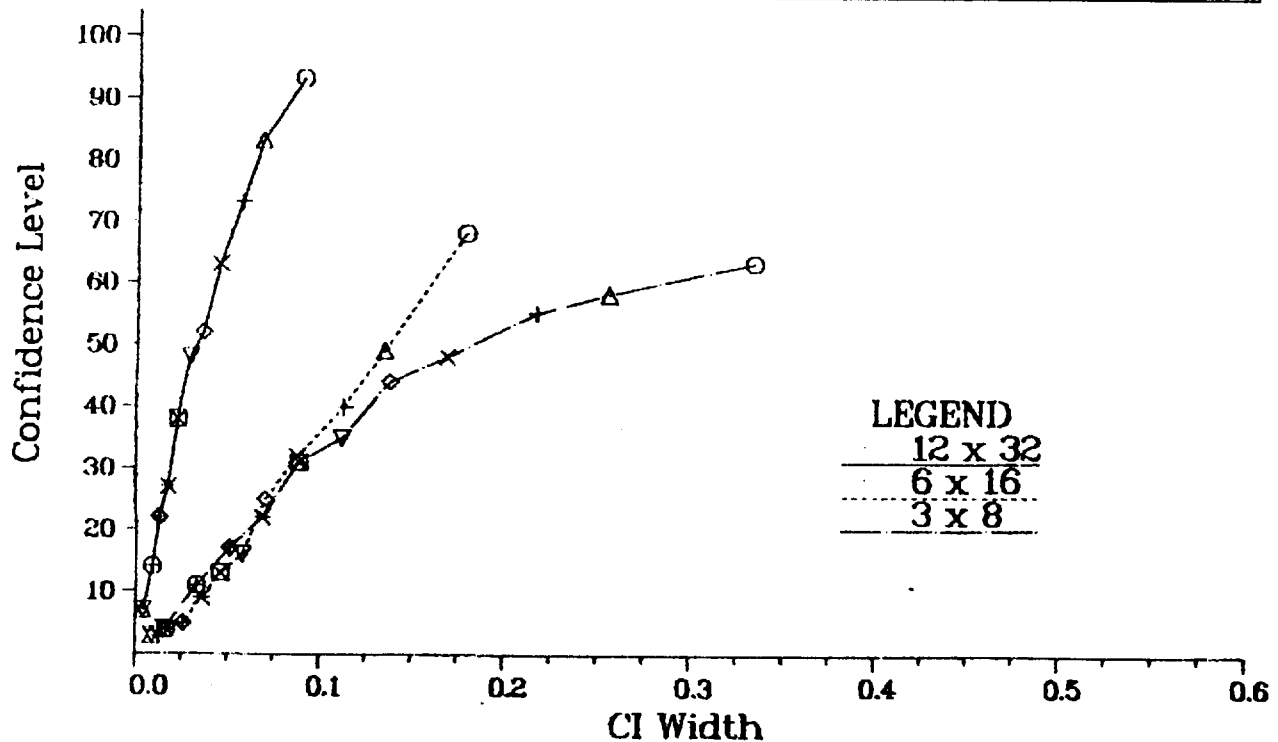


Figure 9. Data summary for the tank (Normal case,  $\sigma = 1'$ ).

**TABLE 9. NUMBER OF CONFIDENCE INTERVALS COVERING THE PARAMETER  
WEIGHTED PROCEDURE,  $\sigma=3$**

| Grid Size | Inner Percentile Range (Central Area) |     |     |     |     |     |     |     |     |     |     |
|-----------|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|           | .99                                   | .95 | .90 | .80 | .70 | .60 | .50 | .40 | .30 | .20 | .10 |
| 12x32     | 100                                   | 93  | 85  | 71  | 62  | 50  | 44  | 34  | 22  | 16  | 7   |
| 6x16      | 99                                    | 97  | 92  | 83  | 70  | 55  | 48  | 38  | 31  | 21  | 10  |
| 3x8       | 93                                    | 85  | 80  | 69  | 65  | 58  | 46  | 39  | 28  | 23  | 13  |

**TABLE 10. MEAN WIDTH OF CONFIDENCE INTERVALS  
WEIGHTED PROCEDURE,  $\sigma=3$**

| Grid Size | Inner Percentile Range (Central Area) |      |      |      |      |      |      |      |      |      |      |
|-----------|---------------------------------------|------|------|------|------|------|------|------|------|------|------|
|           | .99                                   | .95  | .90  | .80  | .70  | .60  | .50  | .40  | .30  | .20  | .10  |
| 12x32     | .115                                  | .086 | .072 | .056 | .045 | .037 | .030 | .023 | .017 | .011 | .005 |
| 6x16      | .230                                  | .173 | .145 | .113 | .092 | .074 | .060 | .047 | .034 | .023 | .011 |
| 3x8       | .418                                  | .319 | .269 | .210 | .170 | .138 | .111 | .086 | .063 | .042 | .021 |

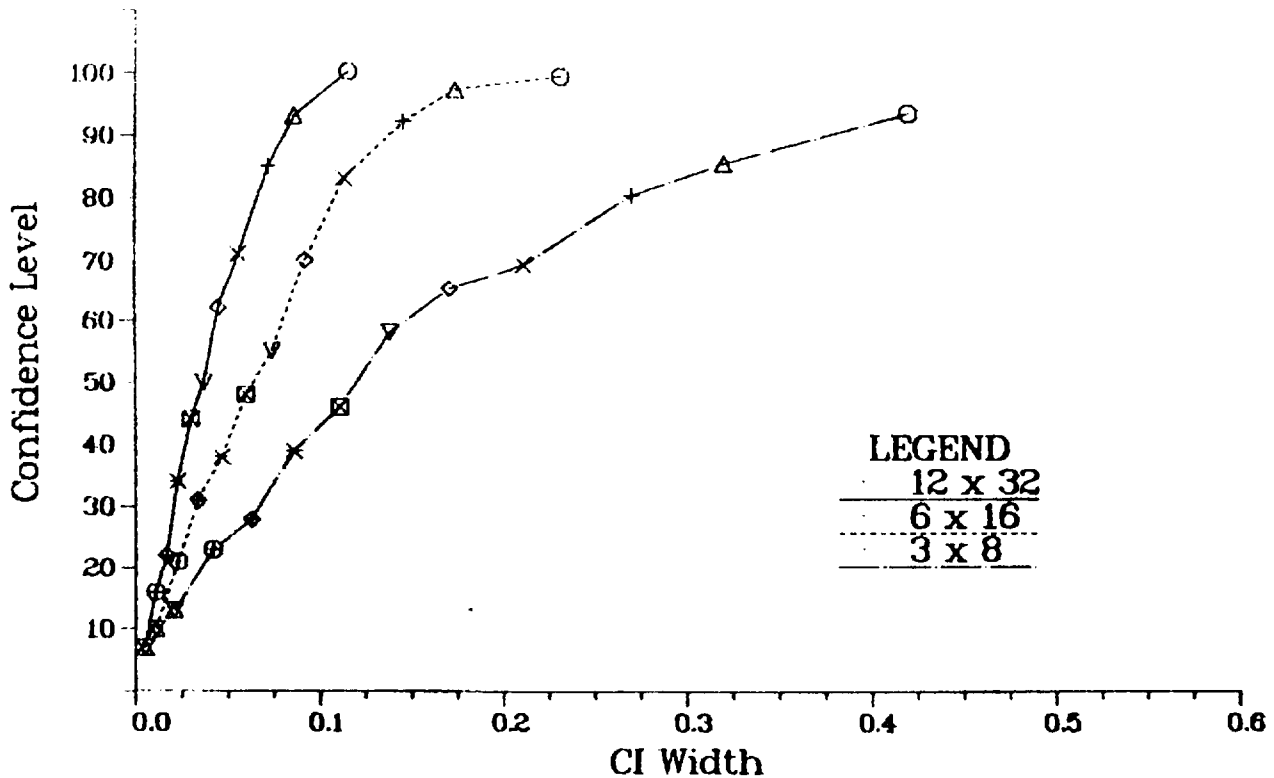


Figure 10. Data summary for the tank (Normal case,  $\sigma = 3'$ ).

**TABLE 11. NUMBER OF CONFIDENCE INTERVALS COVERING THE PARAMETER  
WEIGHTED PROCEDURE,  $\sigma=9$**

| Grid Size | Inner Percentile Range (Central Area) |     |     |     |     |     |     |     |     |     |     |
|-----------|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|           | .99                                   | .95 | .90 | .80 | .70 | .60 | .50 | .40 | .30 | .20 | .10 |
| 12x32     | 100                                   | 100 | 100 | 93  | 88  | 79  | 67  | 55  | 40  | 27  | 14  |
| 6x16      | 100                                   | 99  | 99  | 96  | 88  | 83  | 66  | 50  | 41  | 34  | 18  |
| 3x8       | 96                                    | 95  | 89  | 84  | 75  | 71  | 63  | 58  | 46  | 33  | 20  |

**TABLE 12. MEAN WIDTH OF CONFIDENCE INTERVALS  
WEIGHTED PROCEDURE,  $\sigma=9$**

| Grid Size | Inner Percentile Range (Central Area) |      |      |      |      |      |      |      |      |      |      |
|-----------|---------------------------------------|------|------|------|------|------|------|------|------|------|------|
|           | .99                                   | .95  | .90  | .80  | .70  | .60  | .50  | .40  | .30  | .20  | .10  |
| 12x32     | .110                                  | .083 | .070 | .054 | .044 | .036 | .029 | .022 | .016 | .011 | .005 |
| 6x16      | .217                                  | .164 | .137 | .107 | .087 | .070 | .057 | .044 | .032 | .021 | .011 |
| 3x8       | .400                                  | .306 | .258 | .202 | .163 | .133 | .107 | .083 | .061 | .040 | .020 |

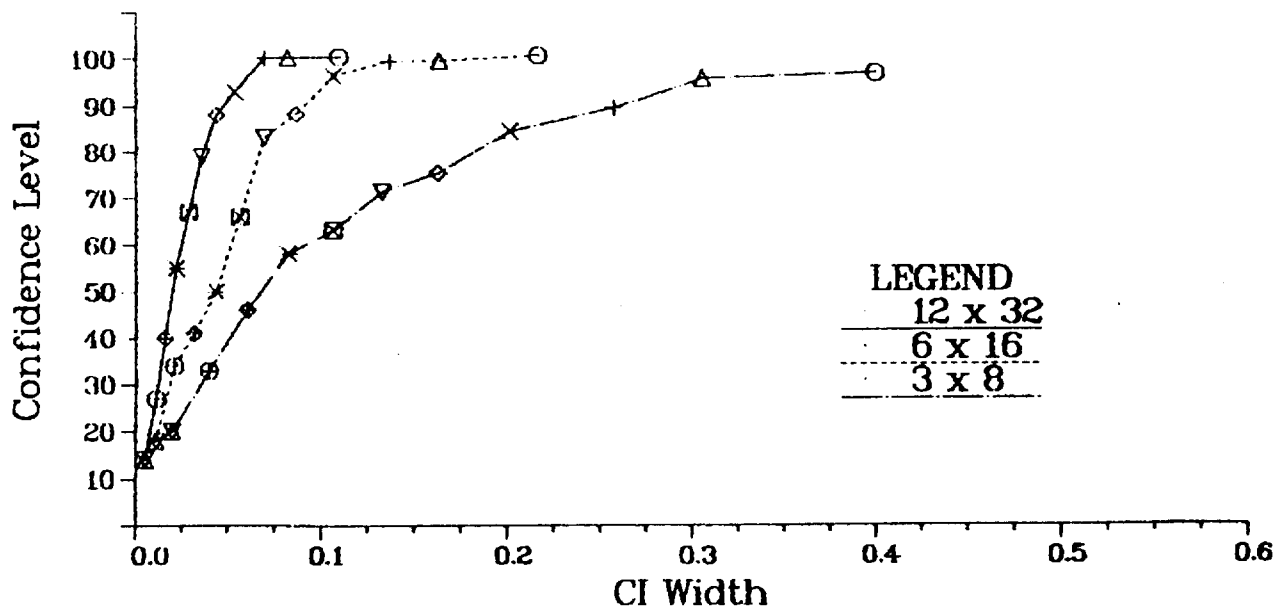


Figure 11. Data summary for the tank (Normal case,  $\sigma = 9'$ ).

When the rounds fall according to a bivariate uniform distribution the bootstrap procedure appears very conservative, generating intervals which cover the parameter  $P_k$  with a frequency in excess of the theoretical value. In the bivariate normal setup with values of  $\sigma=1, 3$  the bootstrap procedure continues to perform well but the confidence intervals are no longer conservative for the overlaid grids considered, as can be seen in Tables 7 and 9. However for  $\sigma = 9$ , where the normal distribution begins to behave more like a uniform distribution over the target, the conservativeness reappears for finer grid sizes.

## 5. SUMMARY AND CONCLUSIONS

The bootstrap, a computer-intensive procedure for data analysis, was applied to an estimation problem to enable a statement to be made about the variability inherent in a probability-of-kill estimate  $\hat{P}_k$ . The bootstrap was applied to a stratified sample rather than a simple random sample and its performance evaluated in this framework, first in an abstract situation where the parameter  $P_k$  was known and then in three situations where the parameter  $P_k$  was unknown, but an estimate provided by current vulnerability analysis procedures was available. The investigation was carried out for several grid sizes, or alternatively, for several levels of detail, to study the effect of grid size on the estimation of  $P_k$  and the reliability of the confidence intervals constructed. Uncertainty inherent in the individual  $\hat{P}_{k|h_i}$ 's was not addressed in this study.

It was pointed out that when the overlaid grid and vulnerability grid coincide, only a single bootstrap confidence interval will be produced. In practice, this is the situation that is likely to be of most interest, since it exploits the highest resolution of detail. In this situation a single confidence interval is sufficient.

This investigation was exploratory in nature, and conclusions are tentative, in the sense that they were drawn from empirical evidence. However, the available evidence strongly suggests the use of the bootstrap procedure to provide an interval estimate to accompany the corresponding point estimate  $\hat{P}_k$ .

## ACKNOWLEDGEMENT

We acknowledge with pleasure the contributions of Robert Kirby and Larry Losie, both of whom gave generously of their time, knowledge, and data; and of Mark Becker, who was involved in this effort at the time of its inception.

DISTRIBUTION LIST

| <u>No. of</u><br><u>Copies</u> | <u>Organization</u>   | <u>No. of</u><br><u>Copies</u> | <u>Organization</u>  |
|--------------------------------|---|--------------------------------|--|
| 12                             | Administrator<br>Defense Technical Info Center<br>ATTN: DTIC-DDA<br>Cameron Station<br>Alexandria, VA 22314                           | 1                              | Commander<br>US Army Communications Rsch<br>and Development Command<br>ATTN: DRSEL-ATDD<br>Fort Monmouth, NJ 07703                             |
| 1                              | Commander<br>US Army Materiel Development<br>and Readiness Command<br>ATTN: DRCDRA-ST<br>Alexandria, VA 22333                         | 1                              | Commander<br>US Army Electronics Research<br>and Development Command<br>Technical Support Activity<br>ATTN: DELSD-L<br>Fort Monmouth, NJ 07703 |
| 1                              | Commander<br>Armament R&D Center<br>US Army AMCCOM<br>ATTN: DRSMC-TDC(D)<br>Dover, NJ 07801   | 1                              | Commander<br>US Army Missile Command<br>ATTN: DRSMI-R<br>Redstone Arsenal, AL 35898  |
| 1                              | Commander<br>Armament R&D Center<br>US Army AMCCOM<br>ATTN: DRSMC-TSS(D)<br>Dover, NJ 07801   | 1                              | Commander<br>US Army Missile Command<br>ATTN: DRSMI-YDL<br>Redstone Arsenal, AL 35898  |
| 1                              | Commander<br>US Army Armament, Munitions<br>and Chemical Command<br>ATTN: DRSMC-LEP-L(R)<br>Rock Island, IL 61299                     | 1                              | Commander<br>US Army Tank Automotive<br>Command<br>ATTN: DRSTA-TSL<br>Warren, MI 48090   |
| 1                              | Director<br><b>Benet Weapons Laboratory</b><br>Armament R&D Center<br>US Army AMCCOM<br>ATTN: DRSMC-LCB-TL(D)<br>Watervliet, NY 12189 | 1                              | Director<br>US Army TRADOC Systems<br>Analysis Activity<br>ATTN: ATAA-SL<br>White Sands Missile Range<br>NM 88002                              |
| 1                              | Commander<br>US Army Aviation Research<br>and Development Command<br>ATTN: DRDAV-E<br>4300 Goodfellow Blvd<br>St. Louis, MO 63120     | 1                              | Commandant<br>US Army Infantry School<br>ATTN: ATSH-CD-CSO-OR<br>Fort Benning, GA 31905  |
| 1                              | Director<br>US Army Air Mobility Research<br>and Development Laboratory<br>Ames Research Center<br>Moffett Field, CA 94035            | 1                              | AFWL/SUL<br>Kirtland AFB, NM 87117   |
| 1                              | Director<br>US Army Air Mobility Research<br>and Development Laboratory<br>Ames Research Center<br>Moffett Field, CA 94035            | 1                              | Commander<br>US Army Research Office<br>ATTN: DRXRO-MA, Dr. Robert Launer<br>P.O. Box 12211<br>Research Triangle Park, NC 27709                |

DISTRIBUTION LIST

| <u>No. of<br/>Copies</u> | <u>Organization</u>   |
|--------------------------|---|
| 1                        | HQDA<br>DAMA-ART-M<br>Washington, DC 20310  |
| 1                        | Commander<br>US Army Development & Employment<br>Agency<br>ATTN: MODE-TED-SAB<br>Fort Lewis, WA 98433 |

Aberdeen Proving Ground

Dir, USAMSAA  
ATTN: DRXSY-D  
DRXSY-MP, H. Cohen  
DRXSY-J, J.A. Matts

Cdr, USATECOM  
ATTN: DRSTE-TO-F

Cdr, CRDC, AMCCOM  
ATTN: DRSMC-CLB-PA  
DRSMC-CLN  
DRSMC-CLJ-L

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. BRL Report Number \_\_\_\_\_ Date of Report \_\_\_\_\_

2. Date Report Received \_\_\_\_\_

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

4. How specifically, is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

CURRENT ADDRESS      \_\_\_\_\_  
Name  
\_\_\_\_\_ Organization  
\_\_\_\_\_ Address  
\_\_\_\_\_ City, State, Zip

7. If indicating a Change of Address or Address Correction, please provide the New or Correct Address in Block 6 above and the Old or Incorrect address below.

OLD ADDRESS      \_\_\_\_\_  
Name  
\_\_\_\_\_ Organization  
\_\_\_\_\_ Address  
\_\_\_\_\_ City, State, Zip

(Remove this sheet along the perforation, fold as indicated, staple or tape closed, and mail.)

----- FOLD HERE -----


Director  
JS Army Ballistic Research Laboratory  
ATTN: DRXBR-OD-ST  
Aberdeen Proving Ground, MD 21005-5066



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE, \$300

**BUSINESS REPLY MAIL**  
FIRST CLASS PERMIT NO 12062 WASHINGTON, DC  
POSTAGE WILL BE PAID BY DEPARTMENT OF THE ARMY

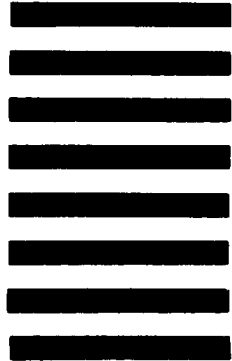

Director  
US Army Ballistic Research Laboratory  
ATTN: DRXBR-OD-ST  
Aberdeen Proving Ground, MD 21005-9989

----- FOLD HERE -----