

AD-A144 782


COMBUSTION MODELING OF A TWO CYLINDER CYCLE
RECIPROCATING ENGINE(U) MASSACHUSETTS INST OF TECH
CAMBRIDGE DEPT OF OCEAN ENGINEERING V CHRJAPIN JUN 84
N66314-70-A-0073


1/1

UNCLASSIFIED

F/G 21/7

NL

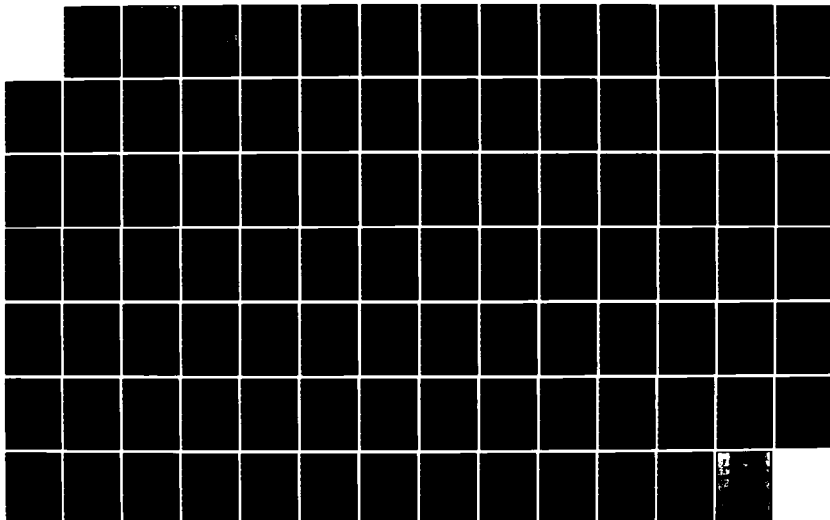



N66314-70-A-0073

①

COMBUSTION MODELING OF A TWO CYLINDER CYCLE
RECIPROCATING ENGINE

by

VICTOR CHRJAPIN

B.S. Mech. Eng., Purdue University
(1975)

SUBMITTED TO THE DEPARTMENT OF
OCEAN ENGINEERING
IN PARTIAL FULFILLMENT OF THE REQUIREMENTS
FOR THE DEGREES OF

MASTER OF SCIENCE IN NAVAL ARCHITECTURE AND MARINE
ENGINEERING

and

MASTER OF SCIENCE IN MECHANICAL ENGINEERING

at the

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
June, 1984

© VICTOR CHRJAPIN, 1984

The author hereby grants to M.I.T. permission to reproduce
and to distribute copies of this document in whole or in
part.

Signature of Author: Victor Chrjapin
Department of Ocean Engineering
May, 1984

Certified by: A. Douglas Carmichael
Professor A. Douglas Carmichael
Thesis Supervisor

Accepted by: A. Douglas Carmichael
Professor A. Douglas Carmichael, Chairman
Departmental Graduate Committee
Department of Ocean Engineering

Accepted by: Warren M. Rohsenow
Professor Warren M. Rohsenow, Chairman
Departmental Committee on Graduate Studies
Department of Mechanical Engineering

This document has been approved
for public release and sale; its
distribution is unlimited.

DTIC
ELECTE
AUG 24 1984
S
E
D

COMBUSTION MODELING OF A TWO CYLINDER CYCLE
RECIPROCATING ENGINE

by

VICTOR CHRJAPIN

Submitted to the Department of Ocean Engineering on May 11, 1984, in partial fulfillment of the requirements for the Degrees of Master of Science in Naval Architecture and Marine Engineering and Master of Science in Mechanical Engineering.

ABSTRACT

A simple mathematical model was developed to simulate the closed portion of the cycle for a quiescent chamber compression ignition engine utilizing the assumption of perfect gases and the first law of thermodynamics. Various input parameters were used in trend analysis to check the model. The output from the computer program was compared to test data from a four inch bore, open chamber semi-quiescent diesel engine run at the Sloan Test Laboratory. This computer model was then modified to simulate the expansion stroke of a newly developed, two cylinder cycle reciprocating engine. The model was then run to determine the optimum point of fuel injection for the new engine.

Thesis Supervisor: Professor A. Douglas Carmichael
Title: Professor of Power Engineering

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	<i>per form 50</i>
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
<i>A-1</i>	



ACKNOWLEDGEMENTS

I wish to express my sincere gratitude to Professor A. Douglas Carmichael for his understanding, assistance and guidance which made this project a most valuable experience. The discussions with Professors Warren M. Rohsenow and John B. Heywood were also most helpful in keeping me and this project on track.

I wish to thank Mr. Peter Birkholz for the use of his data processing facilities and technical advise during the preparation of the final draft of this thesis.

For their everlasting love and encouragement to do better than they, this project is dedicated to my parents, Wasil and Stella.

Last, but not least by any stretch of the imagination, I am most deeply indebted to my wife, Karen, and my daughters, Kelly and Valery, for their love, patience, understanding and encouragement during the course of this project and for the period of study at M.I.T.

Permission is hereby granted to the United States Government to reproduce any or all parts of this thesis.


Victor Chirjapin

TABLE OF CONTENTS

ABSTRACT	2
ACKNOWLEDGEMENTS	3
TABLE OF CONTENTS	4
LIST OF FIGURES	6
1. INTRODUCTION	8
2. DESCRIPTION OF THE TWO CYLINDER CYCLE RECIPROCATING ENGINE	12
3. COMBUSTION AND COMBUSTION MODELING (An overview)	17
3.1 Description of Diesel Engine Combustion	17
3.1.1 The Phases of Combustion	17
3.1.1.1 Ignition Delay	18
3.1.1.2 Premixed Burning	21
3.1.1.3 Diffusion Controlled Burning	21
3.1.1.4 Combustion Tail Stage	21
3.2 Combustion Modeling	22
3.2.1 Types of Models and Uses	23
3.2.1.1 Zero-dimensional Model	23
3.2.1.2 Quasi-dimensional Model	25
3.2.1.3 Multi-dimensional Model	26
4. THE TWO CYLINDER CYCLE COMBUSTION MODEL	27
4.1 Assumptions	27
4.2 Thermodynamics of Internal Combustion Engines	28
4.2.1 Ideal Gas	28

4.2.2 Properties of Gas Mixtures	31
4.2.3 The First Law of Thermodynamics	32
4.3 Heat Transfer from the Gas to the Cylinder	33
4.4 The Combustion Model	35
4.4.1 Preparation of Fuel	36
4.4.2 Reaction of Fuel	38
4.5 Verification of the Model	39
5. SELECTION OF FUEL INJECTION POINT	40
5.1 Selection of the Model Coefficients	40
5.2 Optimizing Fuel Injection	41
6. COMMENTS AND RECOMMENDATIONS	43
6.1 Recommendations	44
REFERENCES	46
FIGURES	50
Appendix A - Specifications of Remley Test Engine	75
Appendix B - Computer Model	77

LIST OF FIGURES

Figure 1: Pressure vs. Volume for New Cycle vs. Diesel Engine	51
Figure 2: Temperature vs. Volume for New Cycle vs. Diesel Engine	52
Figure 3: Potential Arrangement of Components for New Engine	53
Figure 4: Cutaway View of New Cycle Engine	54
Figure 5: Temperature vs. Volume for New Cycle	55
Figure 6: Pressure vs. Volume for New Cycle	56
Figure 7: The Four Phases of Combustion	57
Figure 8: Effects of Temperature and Pressure on Ignition Delay	58
Figure 9: Direct-Injection Compression Ignition Engine Combustion during the 'PREMIXED' Phase	59
Figure 10: Direct-Injection Compression Ignition Engine Combustion during MIXING CONTROLLED Phase	60
Figure 11: Typical Heat Release Diagram Showing Four Stages of Combustion	61
Figure 12: Heat Release Rates Calculated by Whitehouse-Way Model	62
Figure 13: Comparison of Model with results from Remley Test	63
Figure 14: Heat Release Rate Obtained from Computer Model	64
Figure 15: Computer Printout with A/F Ratio=30 Motoring (No Combustion)	65
Figure 16: Computer Printout with A/F Ratio=30, Fuel Injection at 180 degrees CA for 20 degrees	66

Figure 17: Computer Printout with A/F Ratio=30, Fuel Injection at 185 degrees CA for 20 degrees	67
Figure 18: Computer Printout with A/F Ratio=30, Fuel Injection at 190 degrees CA for 20 degrees	68
Figure 19: Computer Printout with A/F Ratio=30, Fuel Injection at 195 degrees CA for 20 degrees	69
Figure 20: Computer Printout with A/F Ratio=30, Fuel Injection at 200 degrees CA for 20 degrees	70
Figure 21: Computer Printout with A/F Ratio=30, Fuel Injection at 205 degrees CA for 20 degrees	71
Figure 22: Computer Printout with A/F Ratio=30, Fuel Injection at 200 degrees CA for 10 degrees	72
Figure 23: Computer Printout with A/F Ratio=30, Fuel Injection at 205 degrees CA for 10 degrees	73
Figure 24: Computer Printout with A/F Ratio=30, Fuel Injection at 210 degrees CA for 10 degrees	74

Chapter 1
INTRODUCTION

The compression ignition (CI) engine is thriving in new found popularity amongst automobiles, medium-duty and heavy-duty freight transport trucks, marine propulsion and auxiliary systems, and various other industrial applications. The United States Department of Energy (DOE) has recently predicted that diesel fuel consumption will exceed gasoline consumption in this country by the year 2000. This is primarily due to the shift to diesel power in the automotive and truck freight transport industries to take advantage of the high efficiency, high power-to-weight ratio engines. The present daily diesel fuel consumption of the order of 10^8 liters⁽¹⁾ is expected to increase by as much as 50 percent by the turn of the century. The increasing fuel consumption rate, coupled with the constant concern of diminishing oil reserves, has prompted renewed interest in improving the operating efficiency of the conventional compression ignition engine. Any small improvement in engine efficiency will obviously result in an enormous savings in petroleum.

The approaches currently pursued to improve compression ignition engine efficiency include increasing the compression ratio and the development of the "adiabatic" engine. The former involves turbocharging and the improvement to piston ring technology. The latter approach concentrates the most emphasis on insulating the engine. This requires the use of temperature-resistant ceramic cylinder liners for combustion cylinders whose gas wall temperatures can be of the order of 1200 degrees Kelvin. In addition to these two approaches, there are many other avenues of research in progress that involve improvements that will increase the compression ratio, decrease the heat loss from the engine, or increase the combustion efficiency through improved combustion chamber design.

Instead of improving upon the conventional compression ignition engine, a new cycle engine design is under development. This new design, proposed by Carmichael^{2}, consists of a two cylinder cycle which divides the functions of a conventional four-stroke diesel cycle into two parts. The new engine has one cylinder which compresses the incoming air charge and another cylinder which acts as the combustion chamber and expansion cylinder. These two cylinders are interconnected by a regenerative heat exchanger. The regenerator acts as the heart of the new design. Through the use of new ceramic materials, the regenerator will act as a heat transfer medium by

transferring a portion of the heat from the exhaust gases to the incoming air charge. The temperature of the incoming air will be elevated twice. The first temperature increase is due to the compression process in the first cylinder. This cylinder, in turn, will transfer its air charge through the ceramic matrix of the regenerative heat exchanger, thus boosting the temperature for the second time. After passing through the regenerator, the incoming air charge will be of sufficient temperature to accomodate spontaneous combustion. With this high temperature, the high compression ratio of the conventional compression ignition engine is not required to obtain work from the cycle. Figures 1 and 2 depict the pressure vs. volume and temperature vs. volume diagrams for the new cycle as compared to a conventional diesel cycle. The preliminary design of this new two cylinder cycle engine indicates that an improvement to thermal efficiency can be achieved over the conventional compression ignition engine.

An important element of the engine design process is the capability to predict, with an acceptable degree of accuracy, the energy release during combustion as a function of time. This process is extremely complex in that it involves the injection and atomization of fuel, the evaporation and mixing of the fuel with the air charge, followed by the various phases of combustion. The ability to accurately predict the heat release rate is vital to the engine designer when analyzing a new engine design.

This thesis is an attempt to assimilate various diesel engine combustion models to produce a simple, yet accurate, model to be used in the continuing evaluation of the new two cylinder cycle reciprocating engine. The proposed model can be utilized on a personal computer system to determine the optimum point of fuel injection for the new engine. The model has the capability to evaluate two different fuel types (i e. iso-octane and propane).

Chapter 2

DESCRIPTION OF THE TWO CYLINDER CYCLE RECIPROCATING ENGINE

The Two Cylinder Cycle Reciprocating Engine consists of one compression cylinder and a pair of combustion/expansion cylinders, see figures 3 and 4. The compression cylinder consists of an intake valve and two exhaust valves, one to each expansion cylinder. Each expansion cylinder has its own fuel injector. The regenerator cavity contains an exhaust valve in addition to the ceramic matrix regenerator. The pistons of both the compression cylinder and the expansion cylinders are considered to be of simple geometry with flat heads. The expansion cylinder piston incorporates no unique features to increase turbulence or swirl, thus it is similar to a direct injection, quiescent chamber diesel engine cylinder. The five valves and three pistons are actuated by a camshaft that allows the compression piston to operate at twice the speed of an expansion piston. The compression cylinder will alternately provide a compressed air charge to each expansion cylinder via the regenerator. A typical cycle can be illustrated by referring to figures 3 and 4.

Step 1: The compression cylinder is at top dead center (TDC) and has just completed transferring an air charge to cylinder A. Cylinder A is just starting an expansion stroke and cylinder B is just starting an exhaust stroke. Valve 1 is closed, valve 2A just closed, valve 3B just opened, valves 2B and 3A are already closed.

Step 2: The compression cylinder is approximately 90° ATDC and in the middle of an air charge induction. Cylinder A is still in the expansion process and cylinder B is still exhausting. Valve 1 is open, valves 2A, 3A, 2B are closed and valve 3B is open.

Step 3: The compression cylinder is at bottom dead center (BDC) and has completed induction of an air charge. Cylinder A is still expanding and cylinder B is exhausting through the regenerator. Valve 1 just closed, valves 2A, 3A, 2B are closed and valve 3B is still open.

Step 4: The compression cylinder is approximately 90° BTDC and in the middle of compressing the air charge. Cylinder A is ending its expansion stroke and cylinder B is completing its exhaust stroke. Valve 1 is closed, valves 2A, 3A and 2B are closed, valve 3B is still open.

Step 5: The compression cylinder has just reached TDC and has just completed an impulse air charge transfer to cylinder B through the regenerator. Cylinder A has just commenced its exhaust stroke. Valve 1 is closed, valve 2B

has just closed (it only opened for a very short time just before the compression cylinder reached TDC), valve 3A just opened, valves 2A and 3B are closed. (This is the same as step 1 except that cylinders A and B are reversed.)

Step 6: The compression cylinder is approximately 90° ATDC and is in the middle of an air charge induction. Cylinder A is still exhausting and cylinder B is in the expansion process. Valve 1 is open, valves 2B, 3B, 2A are closed and valve 3A is open. (This is the same as step 2 except that cylinders A and B are reversed.)

Step 7: The compression cylinder has just reached BDC and has completed induction of an air charge. Cylinder A is exhausting through the regenerator and cylinder B is still expanding. Valve 1 just closed, valves 2B, 3B, 2A are closed and valve 3A is open. (This is the same as step 3 except that cylinders A and B are reversed.)

Step 8: The compression stroke is approximately 90° BTDC and in the middle of compressing an air charge. Cylinder A is completing its exhaust stroke and cylinder B is ending its expansion stroke. Valve 1 is closed, valve 2B, 3B and 2A are closed, valve 3A is still open. (This is the same as step 4 except that cylinders A and B are reversed.)

Step 9: This is the same as step 1.

Figures 5 and 6 show the temperature and pressure as a function of cylinder volume for a cycle.

The table below summarizes the sequencing of the valves for a complete cycle of an expansion cylinder.

Table 1: Sequencing of Valves

	Valve				
	1	2A	3A	2B	3B
Step 1:	X	X	X	X	O
Step 2:	O	X	X	X	O
Step 3:	X	X	X	X	O
Step 4:	X	X	X	X	O
Step 5:	X	X	O	X	X
Step 6:	O	X	O	X	X
Step 7:	X	X	O	X	X
Step 8:	X	X	O	X	X
Step 9:	X	X	X	X	O

where X = Valve closed

and O = Valve open

As can be readily seen, the valve timing sequence is rather complex. The timing sequence must be such as to allow the impulse transfer of the air charge to occur

without possible blow-down to the atmosphere or charging the wrong cylinder. A shift of the crank angle must be considered to optimize the air charge transfer sequence to the on-line expansion cylinder. Thus, the valve timing sequence is a critical factor in the correct and efficient operation of this new engine design and must be dealt with appropriately.

Chapter 3
COMBUSTION AND COMBUSTION MODELING
(An overview)

3.1 Description of Diesel Engine Combustion

The diesel engine combustion process is exceedingly complex and not very well understood. Combustion in the diesel engine is characterized by compression ignition, a non-uniform fuel and air distribution in the combustion chamber, and a continuous mixing throughout the period in which combustion occurs. Due to the initial conditions in the chamber when fuel is first injected, the air charge in the cylinder is of sufficient temperature and pressure to support a chain-reaction. However, combustion in the compression ignition engine is governed by the local conditions in each part of the charge and not dependent on the spread of the flame from one point to another. Therefore, the rate of combustion is dependent on the state and distribution of the fuel and upon the pressure and temperature within the cylinder.^{3}

3.1.1 The Phases of Combustion

Ricardo described the diesel engine combustion process as taking place in three stages; namely the delay period, a period of rapid combustion, followed by burning at a controlled rate.^{3} Lyn^{4} described the burning process in three slightly different phases. The first phase is a period of rapid combustion which lasts for only three degrees crank angle. The second stage is characterized by a decreased rate of heat release lasting approximately 40 degrees crank angle. The third period consists of the fuel burning at a very slow rate which may persist through the remainder of the expansion stroke.

A combination of the descriptions of Ricardo and Lyn may be more appropriate. The stages of combustion could be divided into ignition delay, premixed burning, diffusion controlled combustion and the tail of combustion.^{5,6} Figure 7 depicts the four stages of combustion in a heat release diagram.

3.1.1.1 Ignition Delay

The term ignition delay, or ignition lag, describes the time required by the preliminary reactions that occur prior to the appearance of flame. The ignition delay is broken down into a physical delay and a chemical delay. The physical delay period occurs between the beginning of fuel injection and the onset of chemical reactions. During this period, the fuel is atomized, vaporized, mixed with air and

raised in temperature. This process is sometimes collectively referred to as preparation. The chemical delay period immediately follows the physical delay period and terminates at inflammation or ignition. This period is characterized by chemical reactions starting slowly with pre-flame oxidation of the fuel followed by local ignition.

The ignition delay will vary according to cylinder temperature, cylinder pressure, the type of fuel, the initial temperature of the fuel, the characteristics of the fuel injectors and the turbulence in the cylinder. The physical delay is small for light fuels but can become the controlling factor for heavy, viscous fuels. The physical delay can be significantly reduced by using high injection pressures and high turbulence to expedite the breakup of the fuel jet.

Semi-empirical relationships have been developed to describe the ignition delay. An estimate for ignition delay was developed by Wolfer in 1938:^{7}

$$t = 0.44P^{-1.19}\exp(4650/T)$$

where: t = ignition delay in milliseconds

P = cylinder pressure in atmospheres

and T = temperature in degrees K at
ignition.

An estimate by Clarke^{8} in 1970 is quite similar to that by Wolfer:

$$t = 0.22 \exp(5500/T) P^{-0.727}$$

where: t = ignition delay in seconds

T = cylinder temperature in degrees K

and P = cylinder pressure in N/m^2 .

Still another empirical expression for ignition delay was developed by Spadaccini and Tevelde^{9} from experiments for NASA in 1979 with diesel fuel in a steady flow facility:

$$t = 2.43 \times 10^{-9} P^{-2} \exp(41560/RT)$$

where t = ignition delay in seconds

P = pressure in atmospheres

T = mixture temperature in degrees K

and R = gas constant in $\text{atm cm}^3/\text{gmole}^\circ\text{K}$.

Figure 8 represents the effects of temperature and pressure on ignition delay as determined from the estimates by Wolfer. The Spadaccini and Tevelde and Clarke relationships yield somewhat similar results.

When using ignition delay expressions, it must be emphasized that differences in engines, fuel properties (especially cetane number), fuel injectors and actual engine temperatures and pressures make the calculation rather approximate. These formulas are also very limited by their use of bulk temperatures, with no consideration of local compositions or temperatures.^{10}

3.1.1.2 Premixed Burning

In the premixed burning stage, flame occurs at one or more locations and spreads turbulently. The rate and amount of combustion during this stage is directly related to the fuel preparation rate and the length of the ignition delay period. Since this stage of combustion is one of premixed combustion, little carbon (soot) is produced resulting in little radiation heat transfer. However, since the combustion rate is so intense, combustion generated noise is controlled by this stage of combustion.^{11} Figure 9 depicts premixed burning in a cylinder.

3.1.1.3 Diffusion Controlled Burning

Once the prepared, or premixed, fuel has burned, the combustion process slows down. The combustion rate in this stage will be dominated by the rate of local air entrainment. Since the temperature in the cylinder is favorable for ignition in this stage, the air/fuel mixing process will control the rate of combustion. This preparation of the fuel will be governed by the turbulence and swirl in the cylinder. Lyn^{4} estimated that approximately 40 percent of the heat release from the combustion of fuel comes from this stage. Figure 10 shows the diffusion burning process in a cylinder.

3.1.1.4 Combustion Tail Stage

This last stage of combustion is characterized by the cylinder pressure and temperature falling as the expansion process continues. The rate of combustion tails off due to the chemical kinetic effects as

the chemical reaction rate slows. In this stage, the reaction rate will become the controlling factor instead of the air/fuel mixing process. This stage is also characterized by diffusion combustion with a high production and combustion of soot particles with a resultant high rate of radiation heat transfer. This last stage of combustion can proceed through the completion of the expansion stroke and can contribute upto 20 percent of the total heat release.^{4} Figure 11 represents a typical heat release rate diagram showing the four stages of combustion.

3.2 Combustion Modeling

The combustion process is often considered the most important aspect of an internal combustion engine, but, at the same time, the least understood and most complex. A mathematical model depicting combustion would require good models of the fuel system to include the injection/fuel pump, the injector nozzles, and fuel lines. Additionally, models of fuel atomization, vaporization, fuel/air mixing, cylinder air motion, chemical kinetics and pre-mixed and diffusion mixing would be required. A model as comprehensive as this has yet to be deveoped. Spaulding^{12} states that this type of "combustion modeling is impossible." He justifies this by pointing out that the number of governing restraints and rules outnumber the degrees of freedom and, in addition, the requirements of low cost, speed and accuracy must also be met. Since the complexity of the real combustion process is so overwhelming, substantial simplifying assumptions must be made to obtain solutions.

3.2.1 Types of Models and Uses

Bracco^{13} categorized combustion models into three categories based on their uses in examining different engine problems. The categories are the zero-dimensional (or thermodynamic) model, the quasi-dimensional (or entrainment) model, and the multi-dimensional (or detailed) model.

3.2.1.1 Zero-dimensional Model^{11}

The zero-dimensional model is structured around a thermodynamic analysis of the engine cylinder contents during the cycle. The assumptions include one-dimensional flow, isentropic adiabatic flow through nozzles simulating flow past valves, and unburned mixtures as mixtures of air, fuel vapor and residual gases. Specific heats of the gas mixture are modeled using polynomial functions of temperature. Compression is assumed to be adiabatic. Combustion assumes thermochemical equilibrium and progressive burning via mass elements. The expansion process assumes thermochemical equilibrium.

Heat transfer is modeled using correlations between the Nusselt, Prandtl, and Reynolds numbers from heat transfer in steady turbulent flow over flat plates and pipes. These relationships are in the form of:

$$Nu = aRe^bPr^c$$

where a, b, and c are obtained from experimental data for a specific engine.

The combustion process is generally modeled from an apparent heat release or an experimentally obtained fuel burning rate. One of the most widely used correlations is based on the Wiebe Function. In this function, the fuel burned is expressed as a fraction of the total fuel injected. {5}

$$FB = 1 - \exp[-K_2(t)^{(K_1+1)}]$$

where FB = fraction of fuel burned/total
injected

t = time from ignition

K_1 = shape factor for combustion curve

K_2 = combustion efficiency coefficient.

Another typical function form is the cosine function: {11}

$$X(\theta) = (1/2)\{1 - \cos \pi[(\theta - \theta_0)/\Delta\theta_b]\}$$

where X(θ) = mass fraction burned at crank
angle θ

θ_0 = crank angle at the start of
combustion

and $\Delta\theta_b$ = burn duration.

There are numerous other combustion models that utilize various heat release patterns. Some replace the heat release curve with two straight lines. In this type of combustion model, one line simulates the rapid combustion of the bulk of the injected fuel and the other line represents the slower combustion phase further down the expansion stroke.

An empirical model developed by Whitehouse and Way^{14} is based on elementary combustion principles. Fuel is assumed to be prepared for combustion as a result of fuel-air mixing. The reaction rate calculates the burn rate in the premixed stage of combustion. The preparation rate becomes governing during the diffusion burning phase as the fuel is assumed to burn as rapidly as it is prepared. (The Whitehouse and Way model will be dealt with in detail in a later chapter.)

In general, thermodynamic combustion models are useful when performing a design trade off or comparison analysis to evaluate the effects of change in engine design and operation. Since, however, the details of the combustion process are an input to the model, the results can only indicate what will transpire if the engine burns in the specified manner. These models cannot address the feasibility of the engine operating in the prescribed manner because the details of the burning process are not linked to the engine design and operation.^{15}

3.2.1.2 Quasi-dimensional Model^{11}

Quasi-dimensional models are also structured around a thermodynamic analysis of the engine cylinder during the cycle. Many of the same assumptions are utilized to describe the various portions of the process as are used in the thermodynamic model. The combustion process, on the other hand, is based on more fundamental physical quantities such as turbulent intensity, turbulent mixing, jet characteristics in jet mixing and the kinetics of the fuel-oxidation process.

The quasi-dimensional models can be utilized for the same purposes as the zero-dimensional models except that they can now be used where changes in the combustion process can be a dominant factor. The major drawback of the quasi-dimensional model is its inability to examine, in detail, the interaction between fluid flow and engine geometry.^{14}

3.2.1.3 Multi-dimensional Model^{11}

In a multi-dimensional model, the governing partial-differential equations describing conservation of mass, momentum, energy and species, and the sub-models describing turbulence, chemical kinetics, and etc. are numerically solved subject to boundary conditions and other restraints. These models have the potential for examining the interaction between fluid flow and engine geometry that is lacking in the quasi-dimensional model. The detailed model will predict engine performance and emission characteristics from the first principles with virtually no empirical relationships. Unfortunately, solving the relevant conservation equations in three-dimensional, time dependent formulation, coupled with the state equations and sub-models leads to a computer program that will tax even the most capable computer system.

Chapter 4

THE TWO CYLINDER CYCLE COMBUSTION MODEL

Since the two cylinder cycle reciprocating engine is a totally new concept, combustion modeling can be even more difficult than for a compression ignition engine. However, the approach taken models the expansion cylinder of the new cycle after a diesel engine cylinder. The beginning of the expansion stroke will simulate a diesel engine with its piston at TDC with a charge of air. For this initial combustion model, the air will be assumed to be contained within the cylinder, at pressure, with no additional air added after expansion, as in the actual new engine cycle.

4.1 Assumptions

The assumptions for this single zone combustion model are essentially those previously mentioned for the thermodynamic type of models.

- a. The First Law of Thermodynamics is used to establish an energy balance to determine the temperature at the end of each step.
- b. The working fluid is treated as an ideal gas.
- c. The system contents are homogeneous and of uniform temperature and pressure.

d. The changes in gas properties due to the rate of change of the gas composition are considered to be negligible.

e. Combustion is treated as a reversible heat release process.

f. Combustion products are formed in the proportions according to the law of perfect combustion.

g. No dissociation of the products of combustion occurs.

h. Only four gases are considered to be present and are varied as required for perfect combustion.

i. The incoming air charge is assumed to be pure air plus a fraction of the residual gases remaining in the cylinder.

4.2 Thermodynamics of Internal Combustion Engines

4.2.1 Ideal Gas^{16}

The assumed thermally ideal gas obeys the state equation

$$pV = M\bar{R}T$$

where p = pressure

V = volume

M = number of moles

$\bar{R}$ = universal gas constant

and T = temperature.

The specific gas constant, R , can be written in terms of $\bar{R}$ and m_w , the molecular weight of the gas.

$$R = \bar{R}/m_w.$$

If the mass of the gas, $m = Mm_w$, then the state equation can be written as:

$$pV = mRT.$$

The specific internal energy for an ideal gas can be represented as a function of temperature:

$$u = f(T)$$

where u = specific internal energy

and $f(T)$ = function of temperature dependent on the gas.

If the function $f(T)$ is expressed in the form of a limited power series, then {17}

$$u = u_0 + \sum_{n=1}^{n=5} a_n T^n$$

where a_1 to a_5 are constants which vary depending on the gas

and u_0 = internal energy at absolute zero.

The specific heat at constant volume can be defined as:

$$C_v = (dq/dT)_v = (du/dT)_v.$$

Thus, following the same procedures as for the internal energy, above: {17,18}

$$C_v = \sum_{n=1}^{n=5} n a_n T^{n-1}$$

The specific enthalpy, h , for an ideal gas is given by:

$$h = u + RT.$$

It follows that: {17,18}

$$h = h(T) = u_0 + \sum_{n=1}^{n=5} a_n T^n + RT.$$

At absolute zero, $T=0$:

$$h = h_0 = u_0.$$

Therefore, for a perfect gas, the internal energy varies linearly with temperature as:

$$h = h_0 + C_V T + RT.$$

The specific heat at constant pressure, C_p , is defined by:

$$C_p = (dq/dT)_p = (dh/dT)_p.$$

For a perfect gas:

$$C_p = C_V + \bar{R}.$$

Now, enthalpy can be expressed by:

$$h = h_0 + C_p T.$$

For thermodynamic processes with gases of constant composition and specific heats undergoing state changes;

$$h_0 = u_0 = 0.$$

Then,

$$u = C_V T;$$

$$h = C_p T;$$

$$h - u = (C_p - C_V)T = \bar{R}T;$$

$$\text{and } C_p - C_V = \bar{R}.$$

Gas data are often given in terms of enthalpy vice internal energy.

The conventional form is:

$$\begin{aligned} h(T)/RT &= (h - h_0)/RT \\ &= a_1 + a_2 T + a_3 T^2 + a_4 T^3 + a_5 T^4. \end{aligned}$$

and the internal energy is expressed as:

$$u(T)/RT = (a_1 - 1) + a_2 T + a_3 T^2 + a_4 T^3 + a_5 T^4.$$

The values for the polynomial coefficients, a_0 to a_5 are provided in Table 2. Other formulations for the calculation of enthalpy and specific heat are available in the literature.^{5,26,27}

Table 2: Polynomial Coefficients

Range: 500 - 3000 Degrees Kelvin

	a_1	a_2	a_3	a_4	a_5
CO ₂	3.0959	2.73114E-03	-7.88542E-07	8.66002E-11	0.0
H ₂ O	3.74292	5.65590E-04	4.95240E-08	-1.81802E-11	0.0
O ₂	3.25304	6.52350E-04	-1.49524E-07	1.53897E-11	0.0
N ₂	3.34435	2.94260E-04	1.95300E-09	-6.57470E-12	0.0
C ₈ H ₁₈	-0.71993	4.6426E-02	-1.68385E-05	-2.67009E-09	0.0
C ₃ H ₈	1.13711	1.45532E-02	-2.95876E-06	0.0	0.0

4.2.2 Properties of Gas Mixtures^{18}

Mixtures of gases obey the following.

- a. The gas mixture as a whole obeys the equation of state, $pV = MRT$, where M is the total number of moles of all species.
- b. The total pressure of the mixture is equal to the sum of the pressures which the individual components/species exert.
- c. The internal energy, enthalpy and entropy of the mixture equals the sum of the internal energies, enthalpies and entropies which each individual component/species would have if it separately occupied the

entire volume of the mixture at the same temperature.

Thus, for mixtures of ideal gases the mole fraction is given by:

$$x_i = M_i/M$$

where M_i = moles of a specie

and M = total number of moles.

Then,

$$\sum x_i = 1.0.$$

Enthalpy is given by:

$$H = \sum M_i h_i = M \sum x_i h_i.$$

Internal energy is given by:

$$U = \sum M_i u_i = M \sum x_i u_i.$$

Specific Heats are given by:

$$C_p = \sum x_i C_{pi}$$

$$C_v = \sum x_i C_{vi}.$$

4.2.3 The First Law of Thermodynamics⁽¹⁷⁾

The emphasis of this model is the closed portion of the cycle.

Therefore, the First Law of Thermodynamic for closed systems is simply:

$$dQ - dW = dU'$$

where dQ = heat energy transfer

dW = work energy transfer

dU' = change in internal energy.

The internal energy is defined by:

$$U' = U + KE + PE$$

where U = the intrinsic internal energy

KE = kinetic energy

PE = potential energy.

For a closed system, we can assume that $PE = KE = 0$. Therefore,

$$dQ - dW = dU$$

$$\text{where } U = M \sum x_i u_i$$

M = total number of moles

x_i = mole fraction of gas i

u_i = specific internal energy of gas i .

For non-reacting closed systems, we can write:

$$dQ - dW = dU$$

$$\text{where } dW = p dV = (\sum x_i p) dV$$

$$\text{and } dU = M d(\sum x_i u_i).$$

For a reacting closed system, we can expand this to:

$$dQ - p dV = (U_{op} - U_{or}) + U_p(T) - U_r(T)$$

$$\text{where } (U_{op} - U_{or}) = \Delta U_0$$

ΔU_0 = heat of reaction

$U_p(T)$ = energy of products as a
function of time

$U_r(T)$ = energy of reactants as a
function of temperature.

4.3 Heat Transfer from the gas to the Cylinder

To be able to balance the energy in a real system, the heat transfer from the combustion gas to the walls of the cylinder must be considered. Two basic equations are generally accepted for use in cycle

calculations. These are the correlations developed by Annand and Woschni. The relationship by Woschni^{19} is based upon a forced convection model.

$$q/A = C_3 d^{-0.2} p^{0.8} T_g^{-0.053} (C_1 V_p + (C_2 (p - p_0) V T' / p' V')^{0.8} (T_g - T_w))$$

where C_1 , C_2 , and C_3 = constants

A = area

D = cylinder bore

p = pressure

T_g = mean gas temperature

T_w = wall temperature

V_p = piston velocity

p_0 = motoring pressure

p' = trapped pressure

V' = trapped volume

T' = trapped temperature.

Although Woschni's expression is readily accepted, it does not separately distinguish between convection and radiation.

The Annand equation is also largely based on turbulent convection. Unlike the Woschni correlation, Annand claims that the Reynolds number is the major parameter affecting convection. Convection is the first term in his equation. The second term in Annand's equation is a radiation term assuming grey body radiation. Thus:^{20}

$$q/A = a(k/D)(Re)^b (T_g - T_w) + c(T_g^4 - T_w^4)$$

where q = heat transfer rate

A = area

a, b, c = constants

k = thermal conductivity

D = bore

Re = Reynolds Number = $\rho V_p D / \mu$

ρ = density

V_p = piston velocity

μ = viscosity

T_g = temperature of gas (mean)

T_w = temperature of wall.

The range of values for Annand's constants are:

for a four stroke engine:

$$a = 0.26$$

$$b = 0.75 \pm 0.15$$

$$c = 3.88 \pm 1.39 \times 10^{-8} \quad \text{J/sm}^2\text{K}^4$$

for a two stroke engine:

$$a = 0.26$$

$$b = 0.64 \pm 0.10$$

$$c = 3.03 \pm 1.06 \times 10^{-8}$$

Since Annand's equation separates the convective term from the radiation term, it is believed that the Annand correlation is better suited to the new cycle calculations.

4.4 The Combustion Model

In the process of heat release from combustion, both physical and chemical effects are involved. Liquid fuel injected into an engine must be heated, vaporized, and mixed with oxygen in the preparation process prior to combustion. Once the fuel is prepared, it may then burn at a rate controlled by chemical kinetics. It has been demonstrated that the time required for combustion of the prepared fuel is negligible as compared to the preparation time.

At the beginning of the burning period, chemical kinetics are important due to the low temperatures. When fuel is first injected into a cylinder of a diesel engine, the temperature is generally such that rapid burning will not occur. Additionally, the heat transferred to the incoming fuel causes the temperature to drop in the cylinder. As the temperature rises in the cylinder, the combustion rate rises, thus increasing the temperature. The heat release rate continues to rise until the lack of prepared fuel becomes the controlling factor. When the excess prepared fuel is depleted, combustion will proceed at the rate of fuel preparation. Figure 12 represents the effects of preparation rate and reaction rate in premixed burning as a function of crank angle.

4.4.1 Preparation of Fuel

After injection, the fuel is physically prepared for combustion. As mentioned before, this process involves the atomization, vaporization and mixing of the fuel with air. The rate of preparation can be assumed to be proportional to the total surface area of the fuel spray droplets. If all the droplets are assumed to be of identical size, then it

follows: {7,14,21}

$$M_i = np\pi D_o^2/6$$

$$M_u = np\pi D^2$$

where M_i = Mass of fuel injected

M_u = Mass of fuel unburned

n = number of fuel droplets

p = fuel droplet density

D_o = Initial droplet diameter

D = Droplet diameter.

The total area

$$\text{Area} = n\pi D^2 = n\pi (6M_u/np\pi)^{2/3}$$

$$\text{Area} = (6M_i/npD_o^3)^{1/3} (6M_u/p\pi)^{2/3}$$

$$\text{Area} = 6M_i^{1/3} M_u^{2/3} / pD_o.$$

Assuming that the density, p , and initial diameter, D_o , are constant, then the

$$\text{Area} \propto M_i^{1/3} M_u^{2/3}.$$

Allowing for the effect of oxygen availability on the mixing of the fuel, the preparation rate, PR, can be written as:

$$PR = KM_i^{1-x} M_u^x P_{O_2}^m$$

where x = empirical constant

m = empirical constant

P_{O_2} = partial pressure of oxygen

K = constant.

The constant K is a function of the characteristics of fuel injection, air movement and combustion chamber shape. Typical values for four

stroke engine are:{14}

$$K = 0.008 - 0.020$$

$$x = 2/3$$

$$m = 0.4.$$

4.4.2 Reaction of Fuel

Since diesel fuel is not a pure substance, it is impossible to ascertain the exact chemical equations involved since the actual compounds in the fuel are unknown. The temperatures that are available from experiments are only average cylinder temperatures. With these approximations/estimations, the equations for reaction rate are highly empirical. The degree of approximation involved may be justified due to the short time period during which chemical kinetics is of importance. Also, the total fuel that is burned is equal to the amount of fuel that is prepared. The reaction rate equation that was proposed by Whitehouse and Way {7,14,21} is based on the Arrhenius equation.

$$R = (K' P_{O_2}) / (N \sqrt{T}) \int (PR - R) dx \exp(-act/T)$$

where R = reaction rate per degree crank angle

K' = empirical constant

act = empirical constant

P_{O_2} = partial pressure of oxygen

PR = preparation rate

N = engine speed in rpm

T = cylinder temperature.

The effect of the ignition delay period is incorporated in the Arrhenius type expression $\exp(-act/T)$. Typical values of K' and act are :

$$a_{ct} = 1.4 \times 10^4$$

$$K' = 1.2 \times 10^{10} \text{ for two stroke engines}$$

$$K' = 65 \times 10^{10} \text{ for four stroke engines}$$

4.5 Verification of the Model

The model was converted to computer code using TRS-80 Model III Disk Basic. The program listing is presented in Appendix B.

In an effort to set the empirical coefficients, the average value was used for all coefficients that had a range of values for four stroke engines. The program was run and compared to the data obtained by Remley^{22} in actual engine testing in the Sloan Automotive Laboratory. Figure 13 represents the pressure versus volume curve for the model and for the engine run by Remley. Appendix A provides specifications of the test engine.

Chapter 5

SELECTION OF FUEL INJECTION POINT

In order to obtain the maximum work and highest efficiency from the new two cylinder cycle, the time of fuel injection should be optimized. To obtain this optimum, a number of cycles were run on the computer.

5.1 Selection of the Model Coefficients

The model was run assuming the expansion cylinder at TDC with an air charge at a temperature and pressure of 1090°K and 10 atmospheres while the engine speed of 850 rpm and air/fuel ratio were held constant. The selected fuel was C_8H_{18} (iso-octane) with a lower heating value of 4.2×10^7 joules/kilogram and a residual air fraction of 0.05.

The model was run several times to obtain a value of K in the equation:

$$PR = KM_i^{(1-x)} M_u^x p_{O_2}.$$

The values of x and m were held constant at 2/3 and 0.04, respectively, as the values used for four-stroke diesel engines. When searching for a value of K, a diffusion combustion period of 70 - 120 degrees of crank angle was sought. This was found through several iterations to occur at a value of $K = 0.012$.

The values of constants for the reaction rate equation:

$$R = [K' P_{O_2} / NT^{0.5}] \exp(-act/T) \int (PR-R) dx,$$

were selected as the values for four-stroke diesel engines.

With this input data and selection of constants, the model yields a heat release rate curve which closely resembles that described by Ricardo, Lyn and Whitehouse et al, see figure 14. The premixed burning phase yields approximately 45 percent of the heat release, the diffusion controlled burning phase yields approximately 45 percent of the heat release with the tail of combustion providing the remaining 10 percent.

5.2 Optimizing Fuel Injection

Intuitively, the maximum work and highest efficiency would be expected with fuel injection and combustion occurring at TDC, or immediately thereafter. This, however, does not appear to be the case when the data is evaluated. See figures 15 through 21. While the fuel injection is varied from 180 (TDC) to 205 degrees crank angle, with an injection period of 20 degrees, the thermal efficiency rises. For fuel injection occurring from 180 to 195 degrees, the temperature at 360 degrees (BDC) is not sufficient to heat the regenerator matrix to a temperature which will pre-heat the incoming air charge to 1090 degrees Kelvin as specified by the input data. For fuel injection occurring at 205 degrees, and later, incomplete combustion will result.

From this approach, the optimum point of fuel injection occurs at 200 degrees crank angle for a fuel injection period of 20 degrees.

When the fuel injection period is reduced to 10 degrees, a similar pattern is observed. A fuel injection point on, or before, 200 degrees results in the cylinder gas temperature dropping too low to support sufficient air charge pre-heat. Fuel injection on, or after, 210 degrees results in incomplete combustion. See figures 22 through 24. In this case, the optimum point of fuel injection occurs at 205 degrees. The thermal efficiency for this case is higher than the case of a 20 degree injection period. Also, the specific fuel consumption is lower in the case of 10 degree injection as compared to 20 degree injection.

Through a similar analysis, the case of an air/fuel ratio of 25 yields an optimum fuel injection point of 195 degrees crank angle for a period of 20 degrees. For this air/fuel ratio, the value of K in the preparation rate equation was selected as 0.018 to achieve a similar heat release rate pattern.

Chapter 6

COMMENTS AND RECOMMENDATIONS

As can be readily seen, the output from this type of thermodynamic model is dependent on the value of the empirical coefficients. The characteristics of the heat release rate curve will shift as a function of air/fuel ratio, temperature, pressure and engine speed. Therefore, only a comparison of results from a defined heat release should be used for qualitative comparison analysis.

Since this computer model was written for a personal computer, the time required for one run is excessively long for a detailed comparison analysis. The run time for one run with five degree increments is approximately 1 hour and 20 minutes. A motoring analysis (no combustion) requires approximately 15 minutes. The amount of time required in the combustion iteration process is the difference between the two. These times were obtained when running the program with no remark statements and elimination of all unnecessary spaces in the program. Undoubtedly, the efficiency of the program can be somewhat increased by utilizing some clever programming techniques. However, the use of a small computer strictly dedicated to a comparison analysis with crank angle increments of one or two degrees can occupy the machine for an inordinate period of time.

6.1 Recommendations

This single zone model allows for cycle studies. However, a problem that must be explored is the formation of soot and gaseous pollutants. This can be accomplished by expanding the model to a two or four zone model.^{23,24} During this model expansion, the effect of chemical kinetics should be further examined to display a more realistic combustion process. The values of the coefficients for the polynomial expression of enthalpy for the other products of combustion are readily available.^{17,18}

The effects of heat transfer from the system may be more appropriately modeled by the use of the widely accepted Woschni correlations.^{19} The use of Annand's correlation, however, does allow for the separation of convection and radiation.

The effects of mixing of the air charge with the fuel must be further explored to determine the effects on combustion intensity and efficiency.^{25}

The use of a larger computer system would be most beneficial in a comparison analysis. Single runs can be easily done on a personal computer system, however, many runs using small crank angle increments are best, although more costly, performed on a main frame system capable of performing numerous simultaneous calculations.

Lastly, to obtain realistic coefficients for the empirical constants in the preparation and reaction rate equations, experiments using a rapid compression machine are considered appropriate. This

would provide for realistic data with minimum cost.

REFERENCES

1. Ferguson, C.R.: "Diesel Engines: Computers, Lasers and Ceramics", MEMO, Purdue University, Spring 1984.
2. Carmichael, A.D., Professor of Power Engineering, Massachusetts Institute of Technology, September 1983.
3. Taylor, C.F.: The Internal Combustion Engine in Theory and Practice, MIT Press, Cambridge, MA, 1968.
4. Lyn, W.T., "Study of Burning Rate and Nature of Combustion in Diesel Engines", Ninth Symposium (International) on Combustion, pp. 1069-1082, Academic, New York, 1963.
5. Watson, N. and M.S. Janota: Turbocharging the Internal Combustion Engine, John Wiley & Sons, New York, 1982.
6. Obert, E.F.: Internal Combustion Engines and Air Pollution, Harper & Row, New York, 1973.
7. Benson, R.S. and N.D. Whitehouse: Internal Combustion Engines, Pergamon Press, Oxford, 1979.
8. Clarke, A.E., F.W. Stringer and J.S. Clarke, "The Spontaneous Ignition of Hydrocarbon Fuels in a Flowing Stream", Symposium on Diesel Engine Combustion, The Institution of Mechanical Engineers, Vol. 184, Part 3J, London, 1970.

9. Spadaccini, L.J. and J.A. TeVelde, "Auto-ignition Characteristics of Aircraft-type Fuels", NASA CR-159886, Washington, June, 1980.
10. Borman, G.L., "Modeling Flame Propagation and Heat Release in Engines", Symposium on Combustion Modeling in Reciprocating Engines, ed. J.N. Mattavi and C.A. Amann, pp. 165-190, Plenum Press, New York, 1980.
11. Heywood, J.B., "Engine Combustion Modeling - An Overview", Symposium on Combustion Modeling in Reciprocating Engines, ed. J.N. Mattavi and C.A. Amann, pp. 1-34, Plenum Press, New York, 1980.
12. Spaulding, D.B., "The Art of Partial Modeling", Ninth Symposium (International) on Combustion, pp. 833-843, Academic, New York, 1963.
13. Bracco, F.V., "Introducing a New Generation of More Detailed and Informative Combustion Models", SAE Paper No. 741174, 1974.
14. Whitehouse, N.D. and R.J.B. Way, "A Simple Method for the Calculation of Heat Release Rates in Diesel Engines Based on the Fuel Injection Rate", SAE Paper No. 710134, 1971.
15. Heywood, J.B., "Modeling Combustion and Performance Characteristics of Internal Combustion Engines", Proceedings, Heat Transfer and Fluid Mechanics Institute, pp. 180-195, University of California, Davis, 1976.

16. Kunkle, J.S., S.D. Wilson and R.A. Cota (editors): Compressed Gas Handbook, NASA SP-3045, Washington, 1969.
17. Benson, R.S.: Advanced Engineering Thermodynamics, Pergamon Press, Oxford, 1977.
18. Benson, R.S.: The Thermodynamics and Gas Dynamics of Internal Combustion Engines, ed. J.H. Horlock and D.E. Winterborne, Clarendon Press, Oxford, 1982.
19. Woschni, G., "A Universally Acceptable Equation for Instantaneous Heat Transfer in the Internal Combustion Engine", SAE Paper No. 670931, 1967.
20. Annand, W.J.D., "Heat Transfer in the Cylinders of Reciprocating Internal Combustion Engines", Proceedings of The Institution of Mechanical Engineers, Vol. 177, 1963.
21. Whitehouse, N.D. and R. Way, "Rate of Heat Release in Diesel Engines and its Correlation with Fuel Injection Data", Symposium on Diesel Engine Combustion, The Institution of Mechanical Engineers, Vol. 184, Part 3J, 1970.
22. Remley, W.E., "Modeling the Fuel Burning Rate in Diesel Engines", S.M. Thesis, Department of Ocean Engineering, Massachusetts Institute of Technology, May 1972.
23. Whitehouse, N.D. and B.K. Sareen, "Prediction of Heat Release in a Quiescent Chamber Diesel Engine Allowing for Fuel/Air Mixing", SAE Paper No. 740084, 1974.

24. Whitehouse, N.D. and N. Baluswamy, "Calculations of Gaseous Products During Combustion in a Diesel Engine Using a Four Zone Model", SAE Paper No. 770410, 1977.
25. Shroff, N.D. and D. Hodgetts, "Simulation and Optimization of Thermodynamic Processes of Diesel Engines", SAE Transactions, Vol. 83, Paper No. 740194, 1974.
26. Campbell, A.S.: Thermodynamic Analysis of Combustion Engines, John Wiley and Sons, New York, 1979.
27. By, A., B. Kempinski and J.M. Rife, "Knock in Spark Ignition Engines", SAE Paper No. 810147, 1981.

Figures

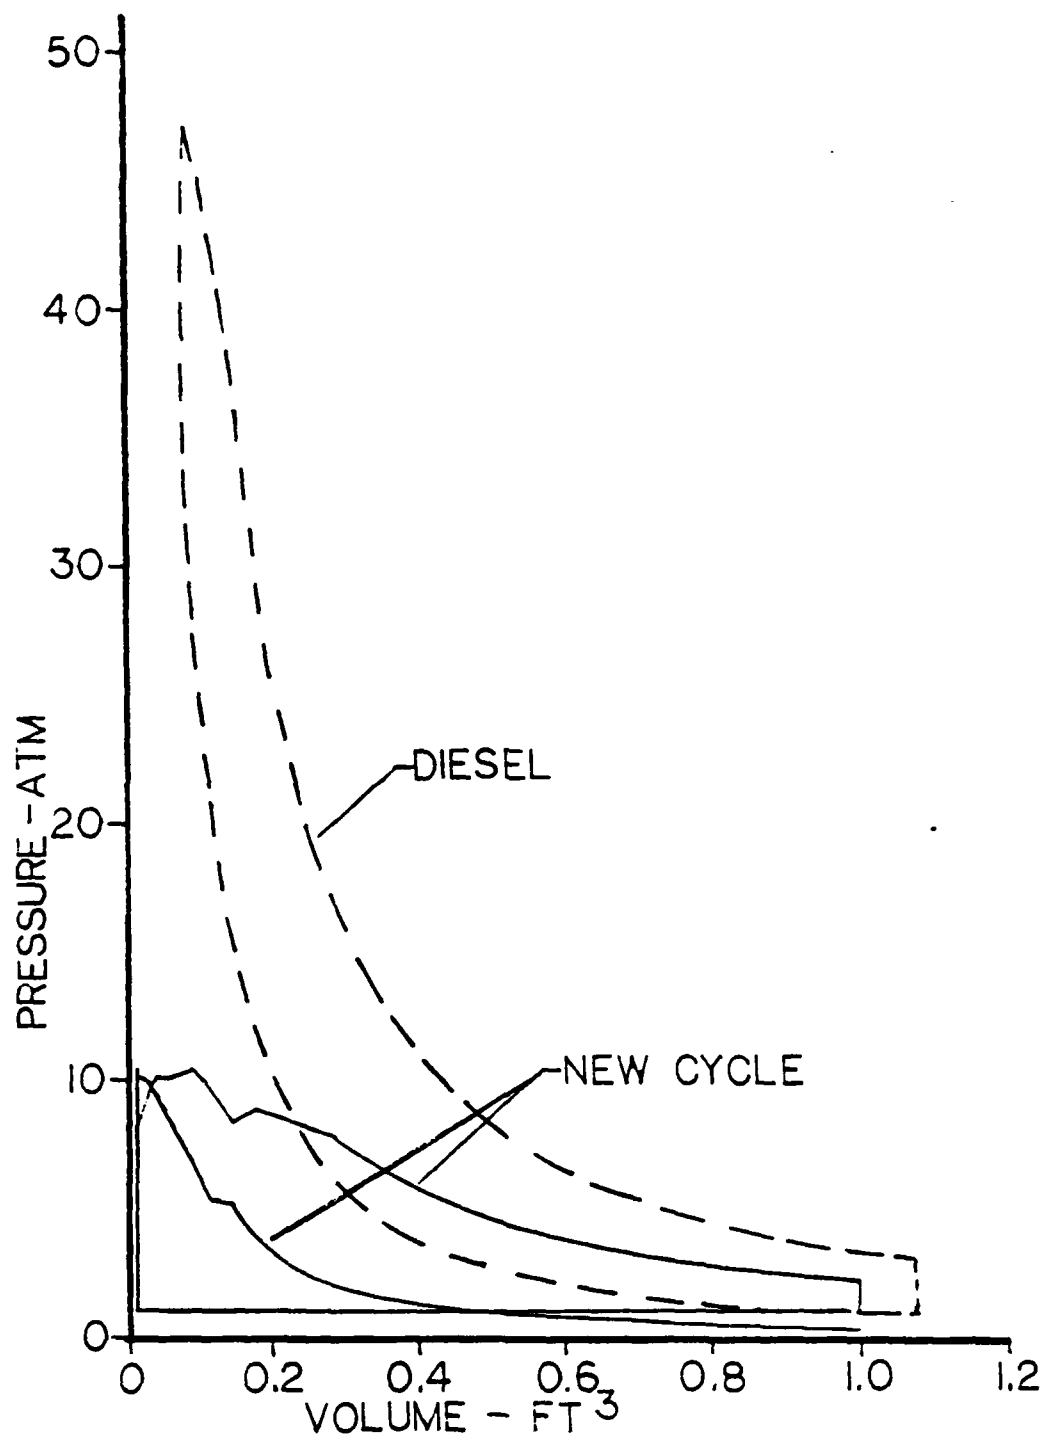


Figure 1: Pressure vs. Volume for New Cycle vs. Diesel Engine

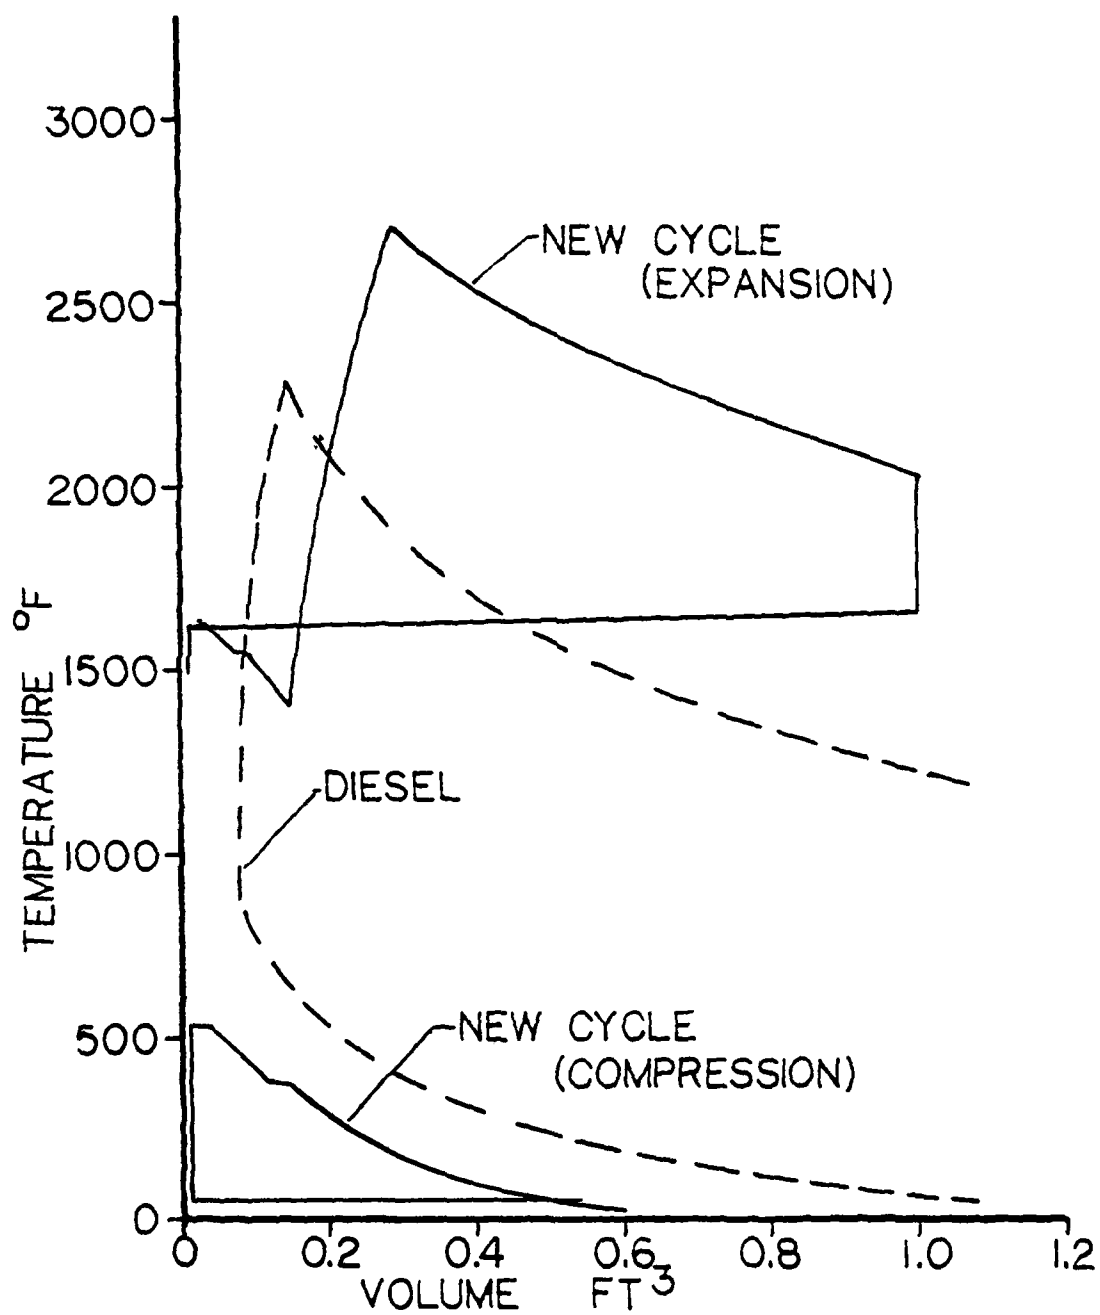


Figure 2: Temperature vs. Volume for New Cycle vs. Diesel

(NOT DRAWN TO SCALE)



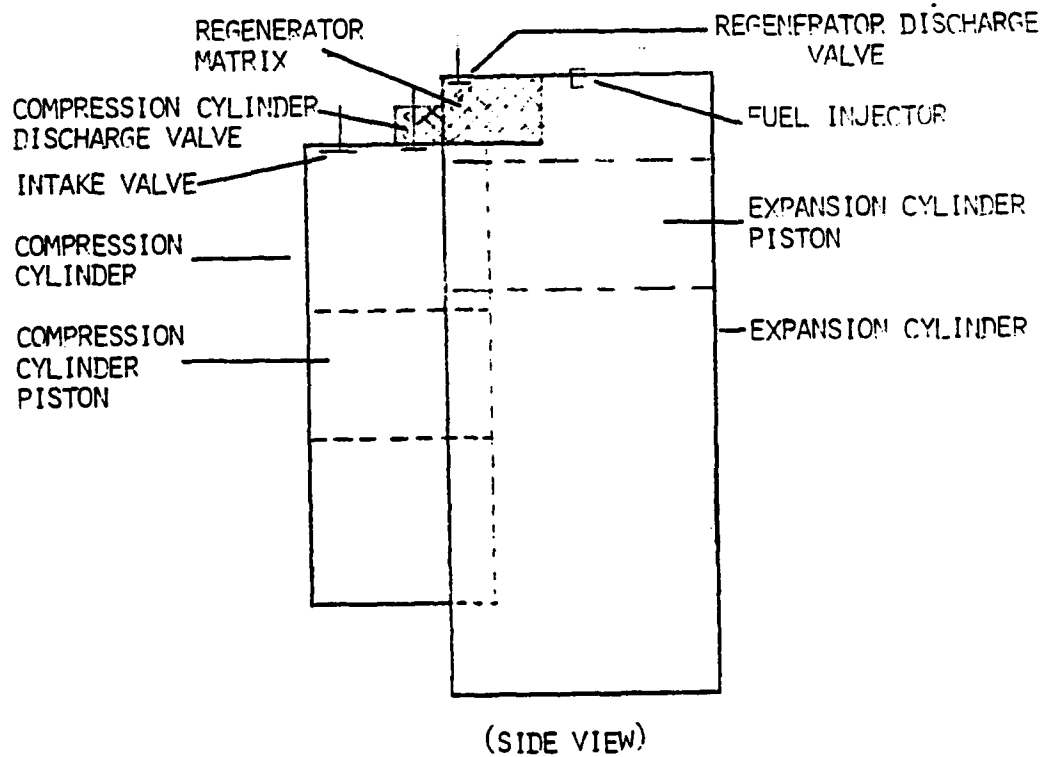


Figure 3: Potential Arrangement of Components for New Engine⁽²⁾

(NOT DRAWN TO SCALE)

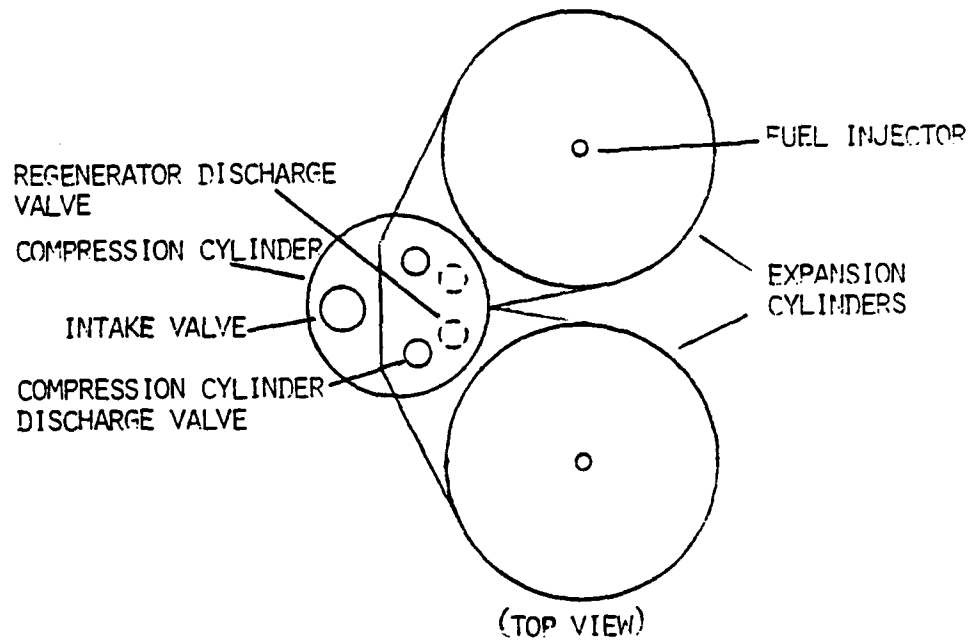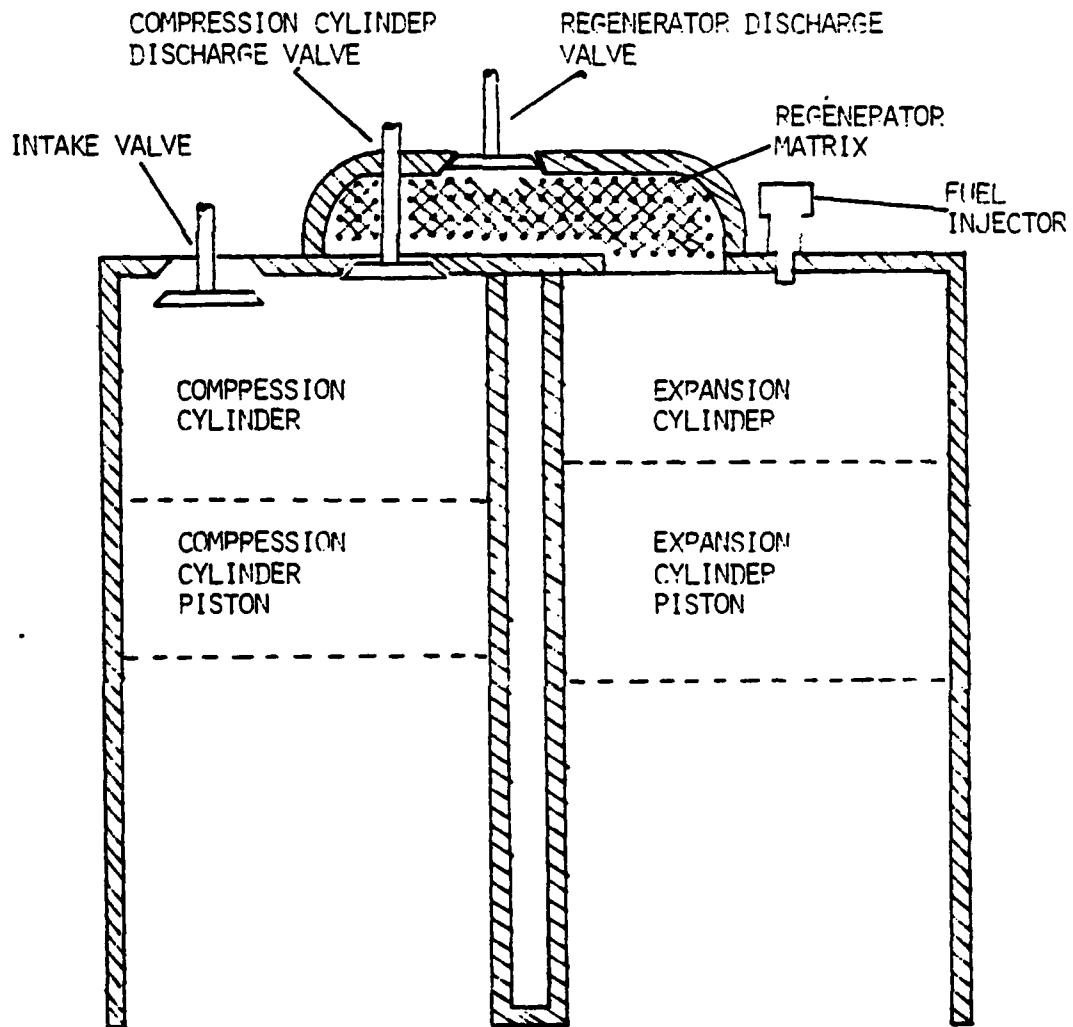

Expansion Cylinder

Bore: 0.3725 meters

Stroke: 0.3725 meters

Figure 4: Cutaway View of New Cycle Engine⁽²⁾

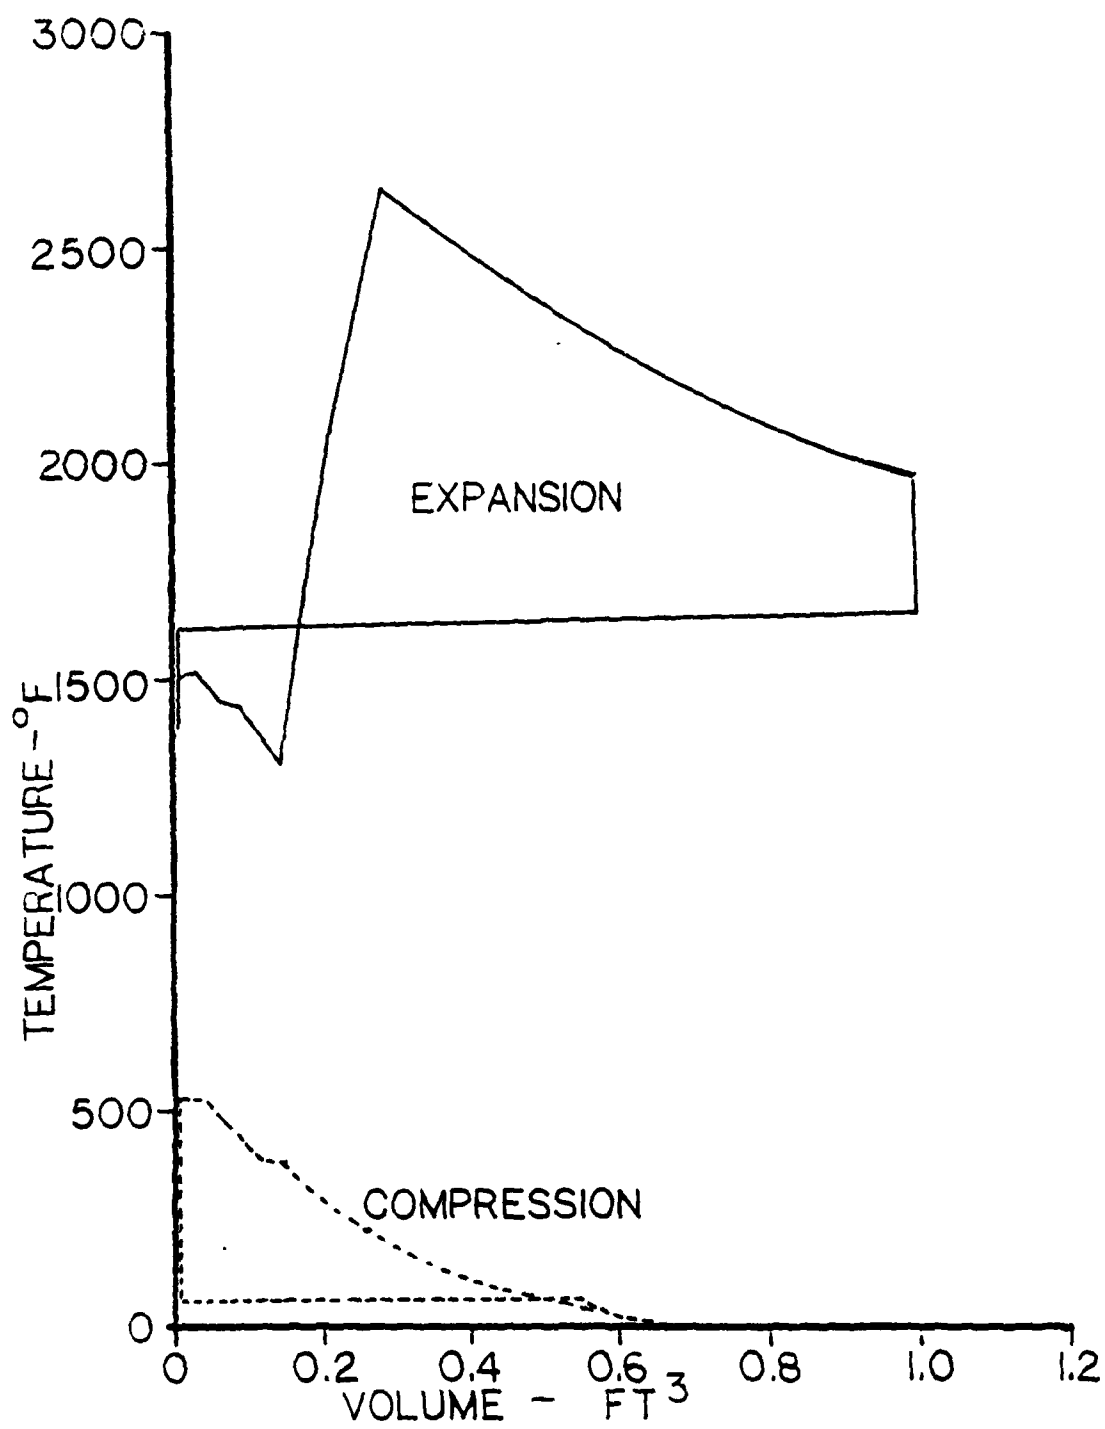


Figure 5: Temperature vs. Volume for New Cycle

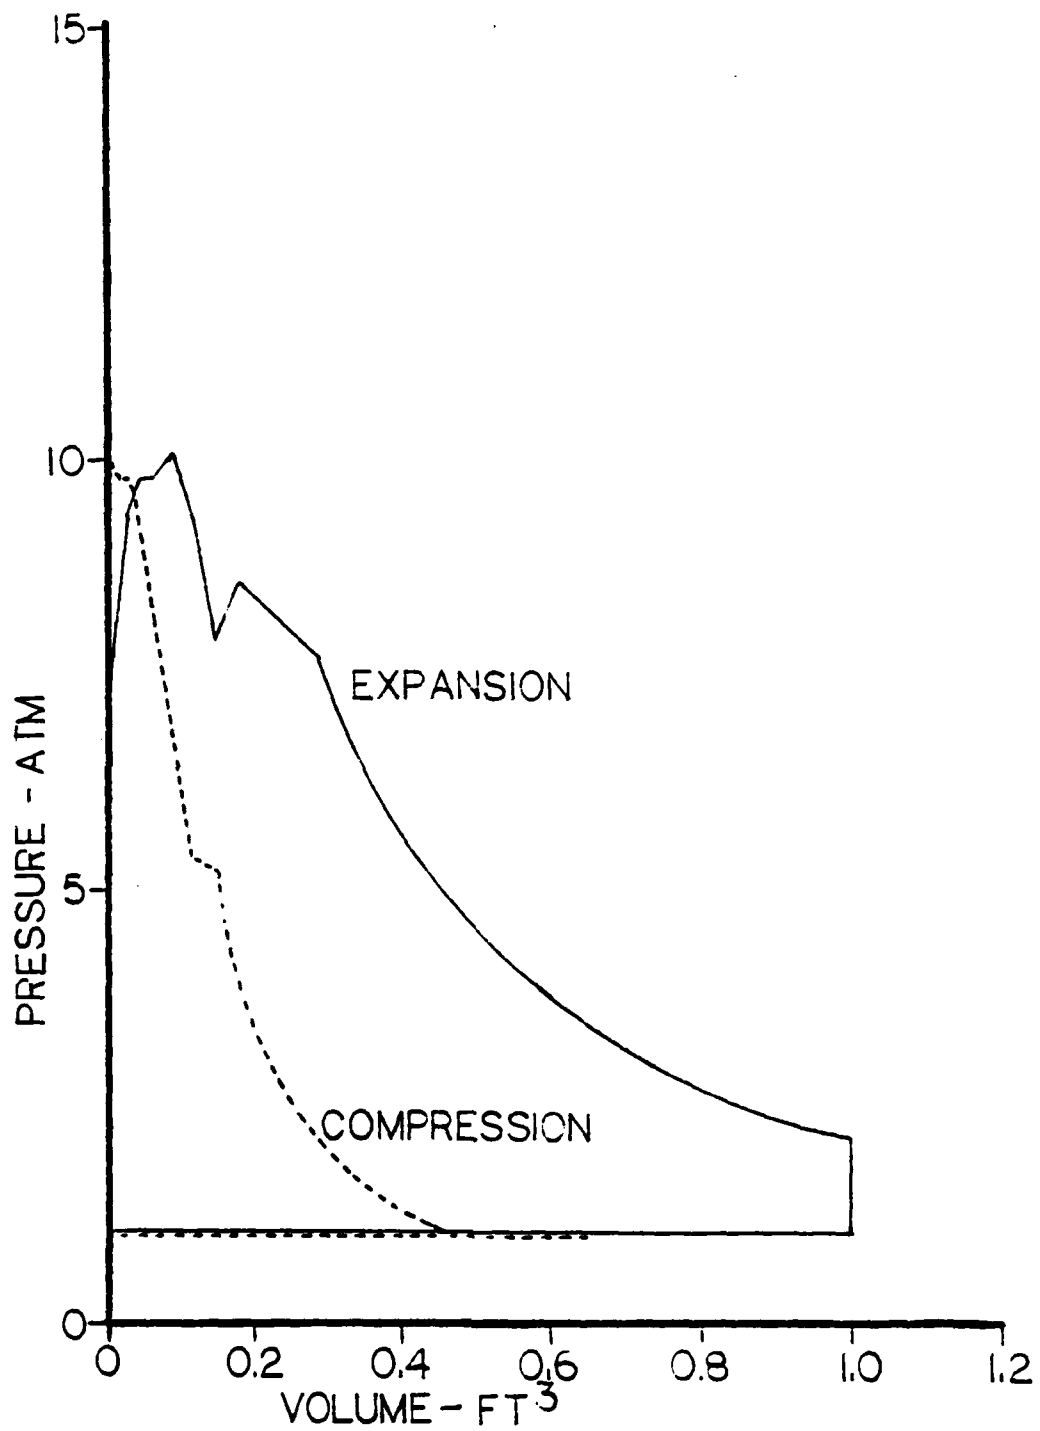


Figure 6: Pressure vs. Volume for New Cycle

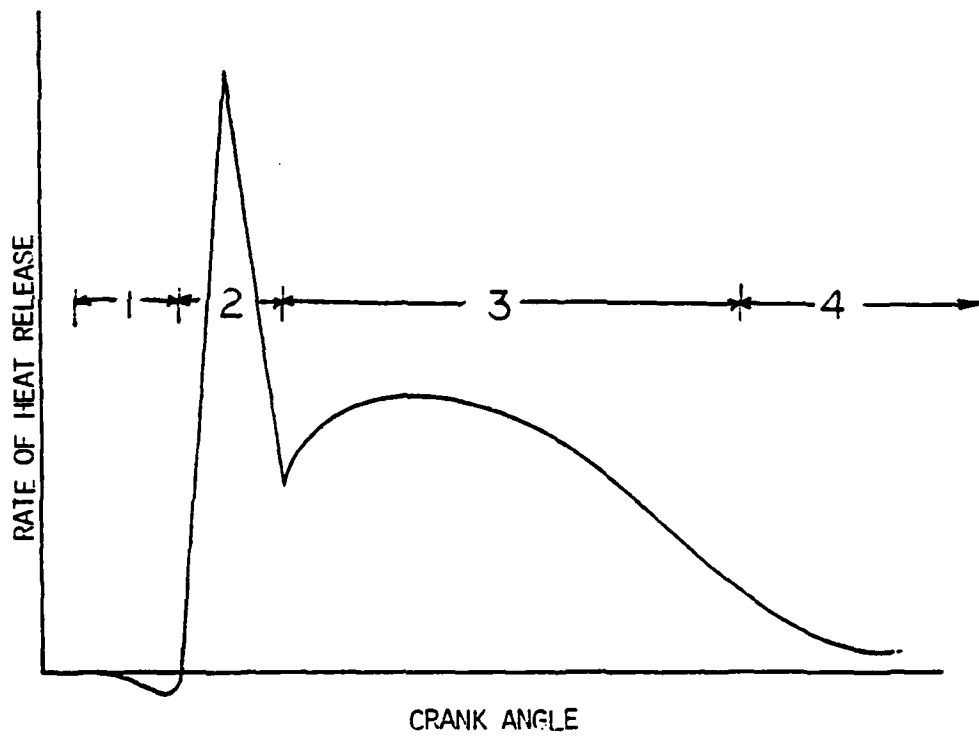


Figure 7: The Four Phases of Combustion

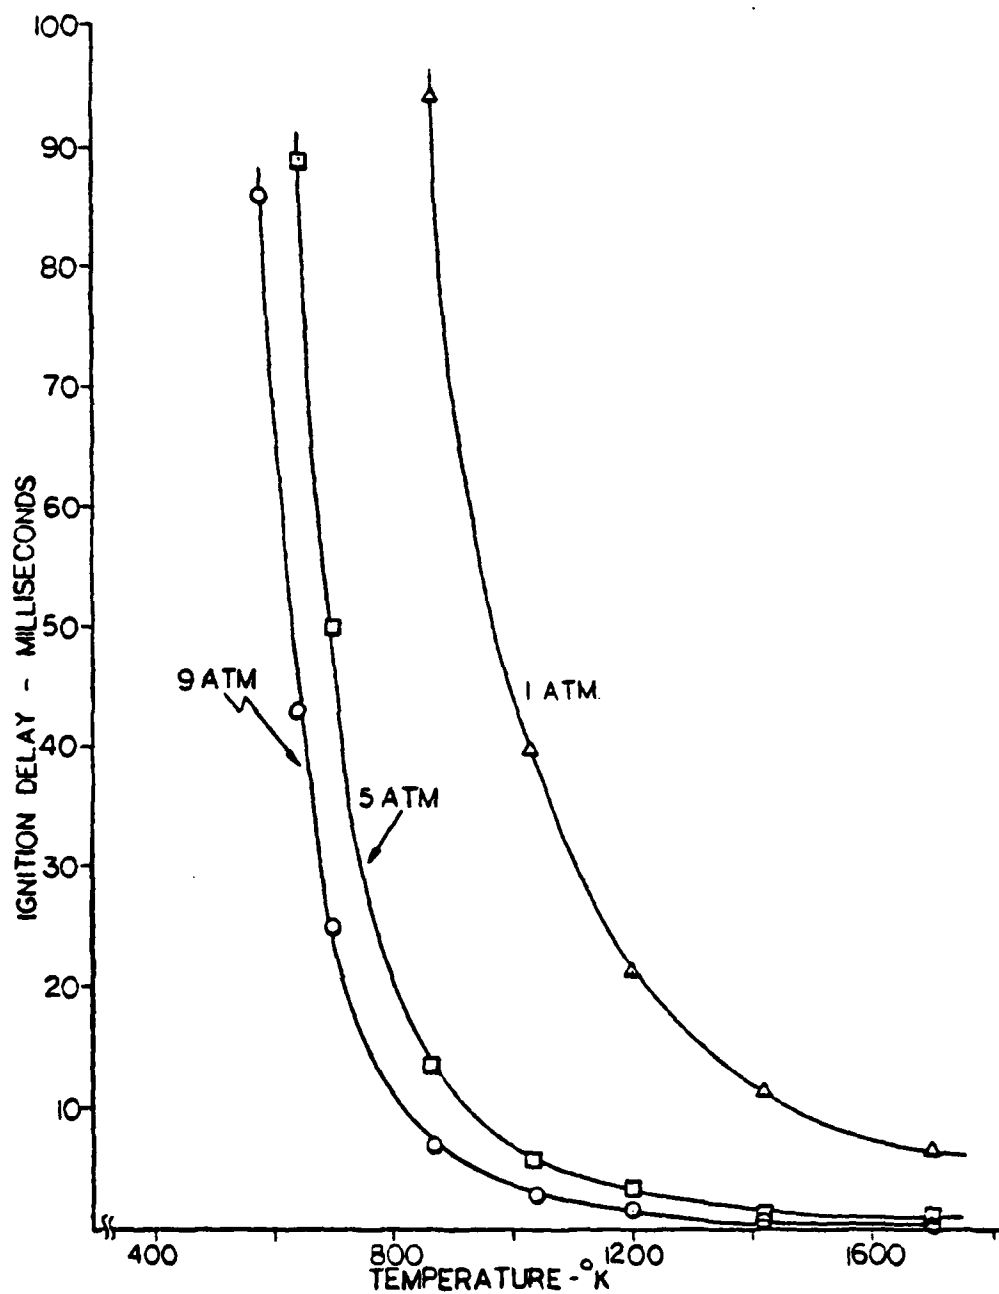


Figure 8: Effects of Temperature and Pressure on Ignition Delay

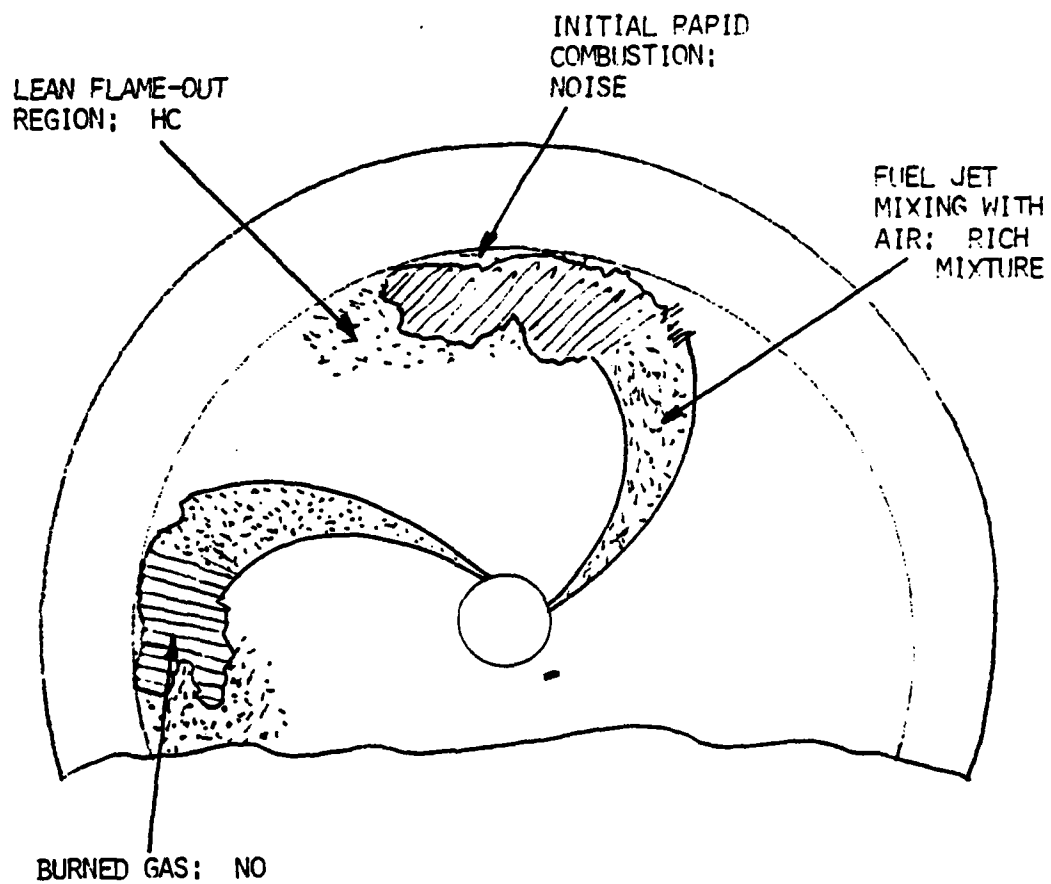


Figure 9: Direct-Injection Compression Ignition Engine (11)
Combustion during the PREMIXED Phase

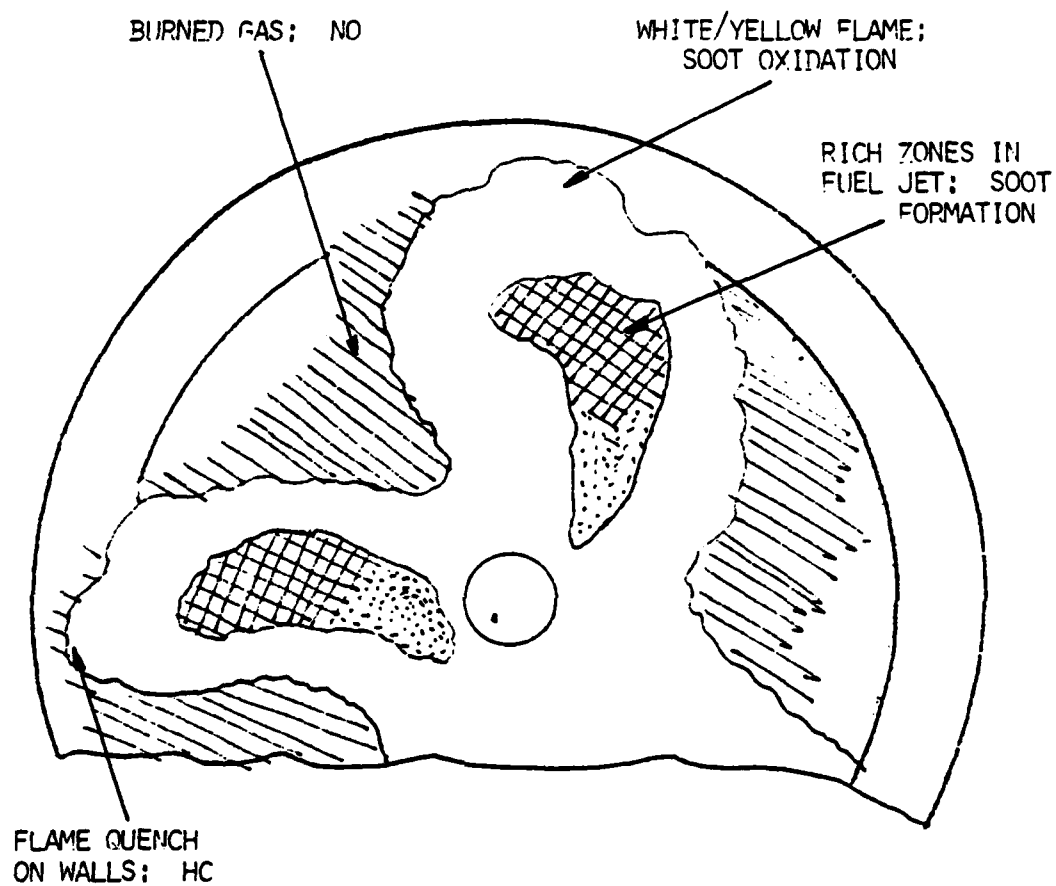


Figure 10: Direct-Injection Compression Ignition Engine (11)
Combustion during the MIXING CONTROLLED Phase

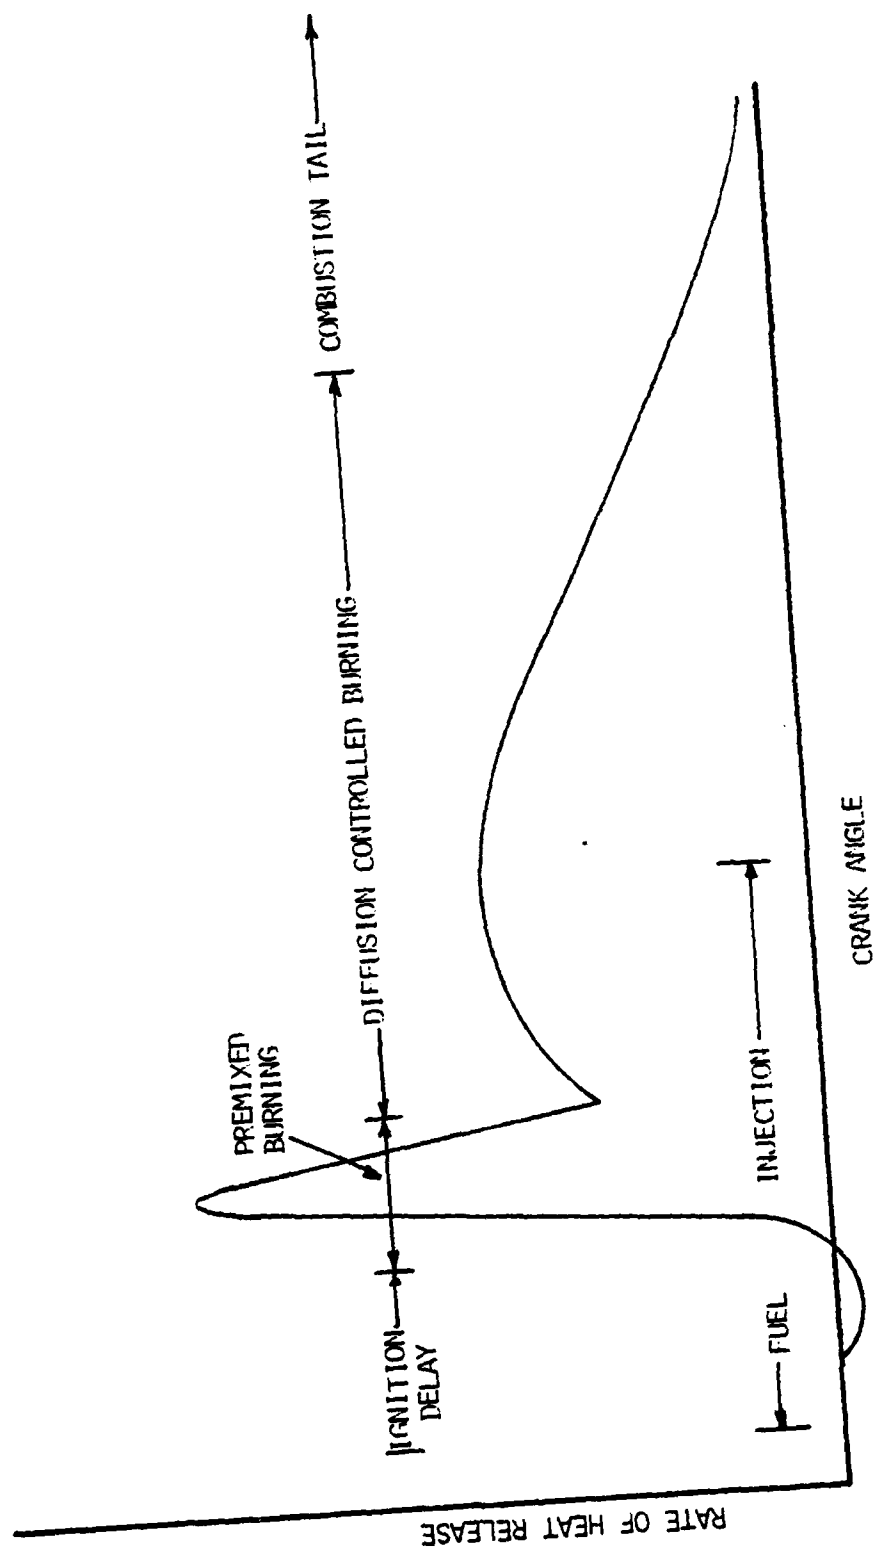


Figure 11: Typical Heat Release Diagram Showing Four Stages of Combustion

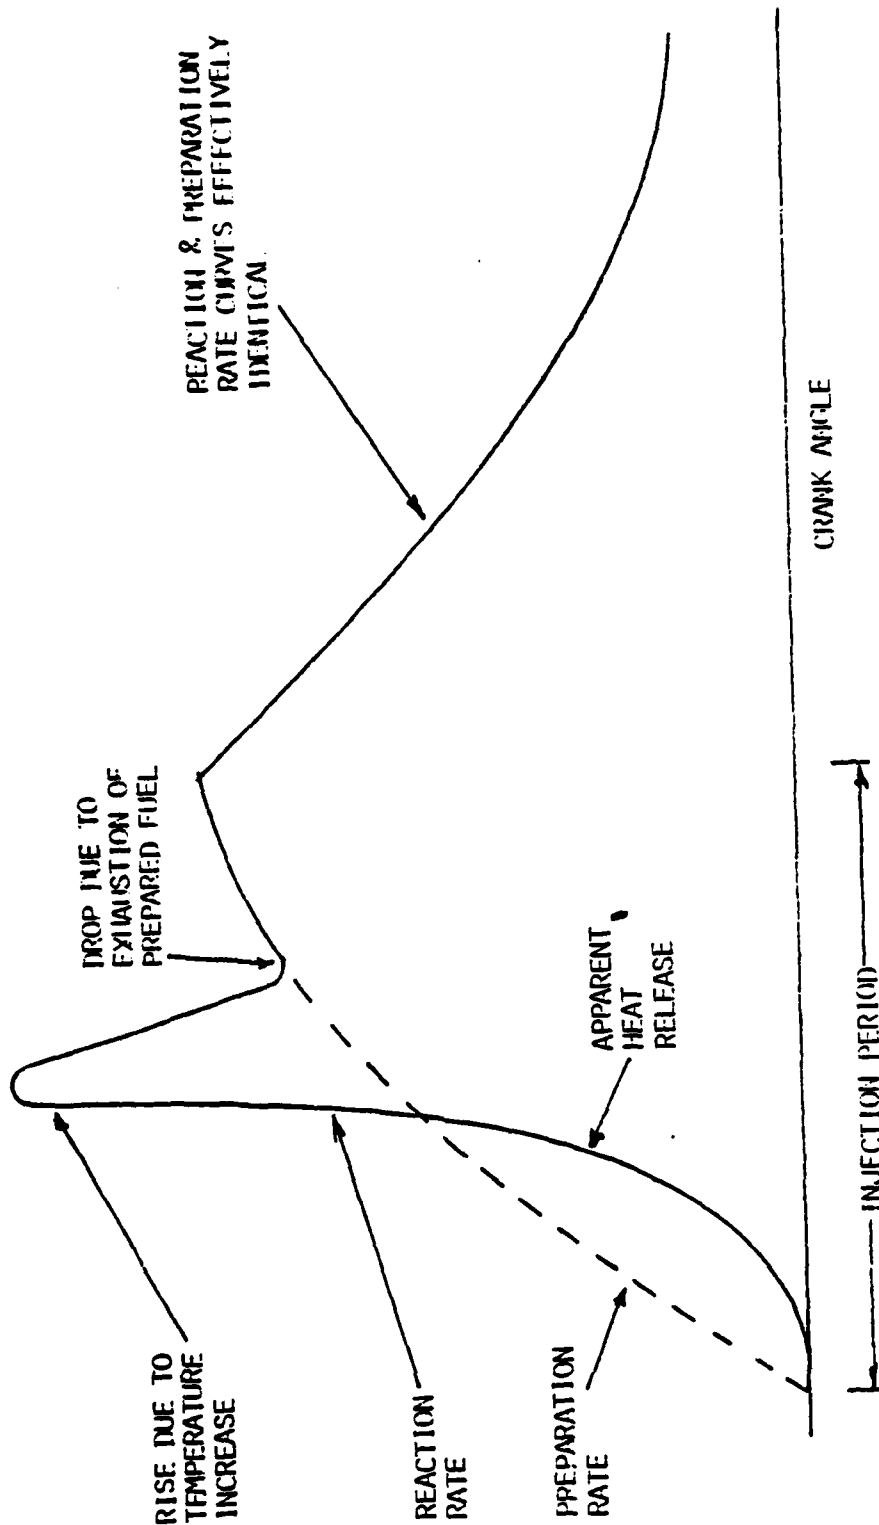


Figure 1.2: Heat Release Rates Calculated by Whitcomb-Ray Model

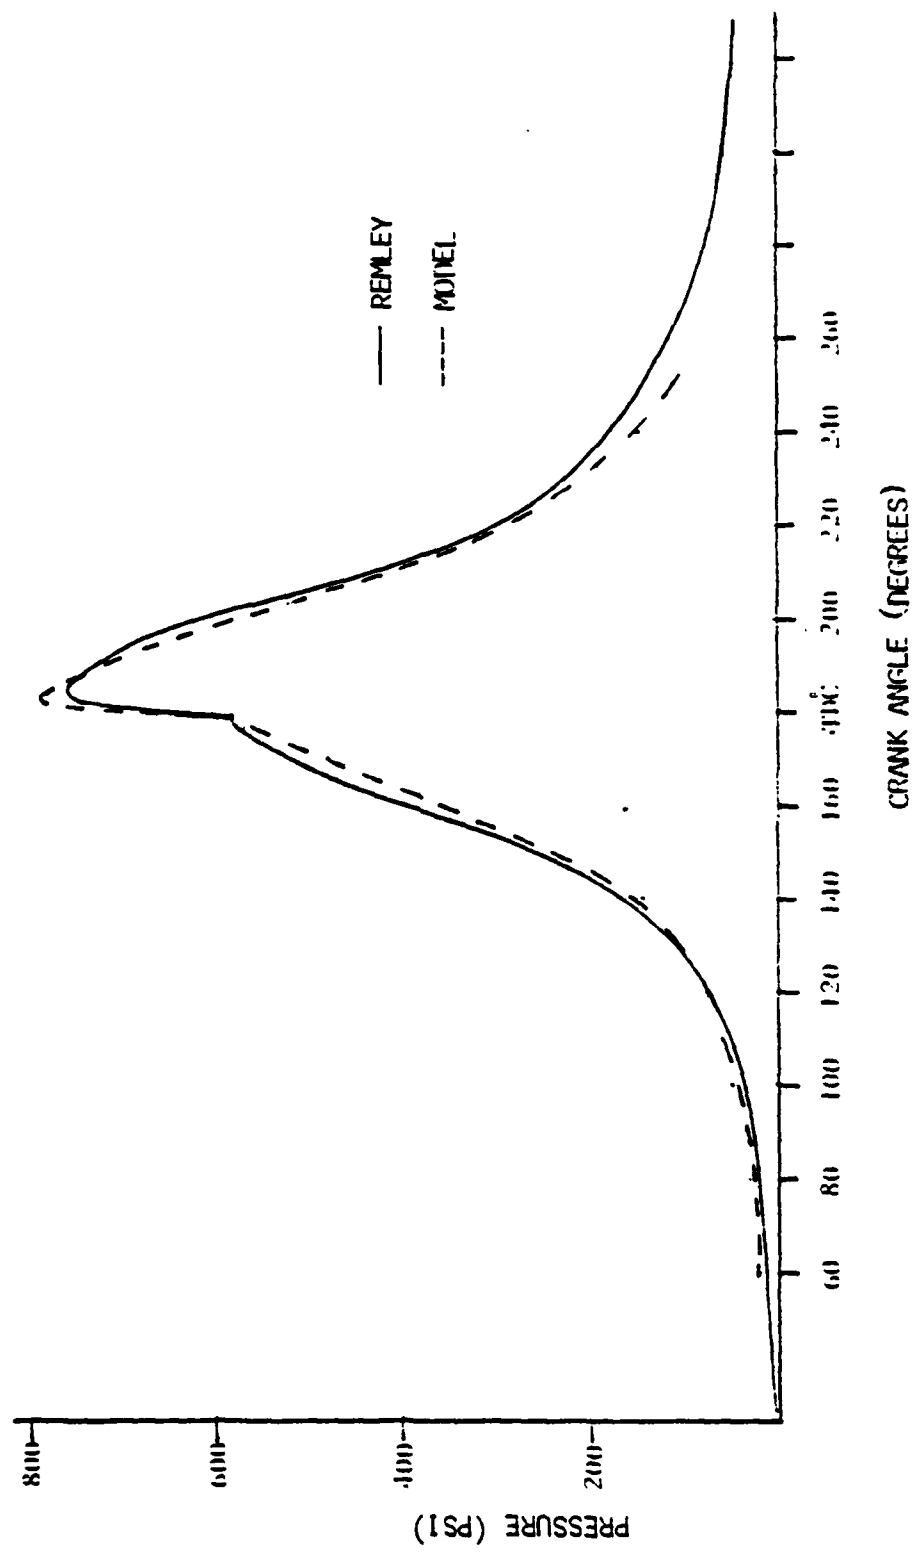


Figure 13: Comparison of Model with results from Remley Test (2")

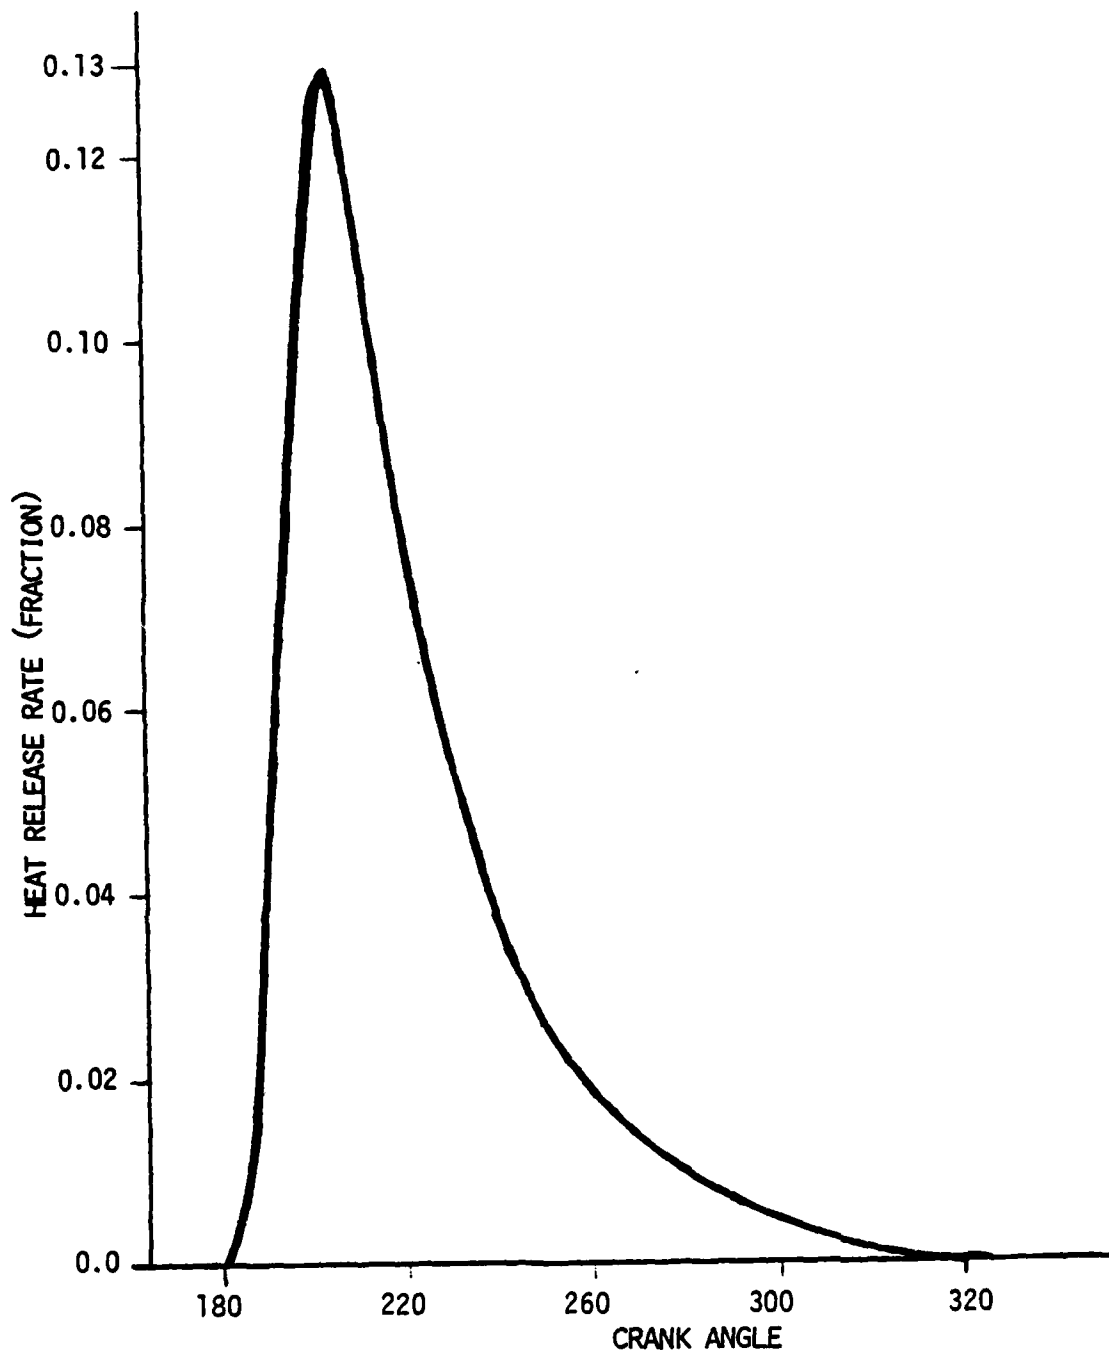


Figure 14: Heat Release Rate Obtained from Computer

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE - MOTORING

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION RATIO (P2/P1)	CYLINDER PRESSURE (P2)	CYLINDER TEMPERATURE (T2)	CYLINDER PRESSURE (P3)	CYLINDER TEMPERATURE (T3)	FUEL FRACTION (F)	EXHAUSTIVE FUEL FRACTION (F)
1.02	2.01457	10.1225	1.02	2	0	2
1.03	2.02836	10.2025	1.03	2	0	2
1.04	2.04215	10.2825	1.04	2	0	2
1.05	2.05594	10.3625	1.05	2	0	2
1.06	2.06973	10.4425	1.06	2	0	2
1.07	2.08352	10.5225	1.07	2	0	2
1.08	2.09731	10.6025	1.08	2	0	2
1.09	2.11110	10.6825	1.09	2	0	2
1.10	2.12489	10.7625	1.10	2	0	2
1.11	2.13868	10.8425	1.11	2	0	2
1.12	2.15247	10.9225	1.12	2	0	2
1.13	2.16626	11.0025	1.13	2	0	2
1.14	2.18005	11.0825	1.14	2	0	2
1.15	2.19384	11.1625	1.15	2	0	2
1.16	2.20763	11.2425	1.16	2	0	2
1.17	2.22142	11.3225	1.17	2	0	2
1.18	2.23521	11.4025	1.18	2	0	2
1.19	2.24900	11.4825	1.19	2	0	2
1.20	2.26279	11.5625	1.20	2	0	2
1.21	2.27658	11.6425	1.21	2	0	2
1.22	2.29037	11.7225	1.22	2	0	2
1.23	2.30416	11.8025	1.23	2	0	2
1.24	2.31795	11.8825	1.24	2	0	2
1.25	2.33174	11.9625	1.25	2	0	2
1.26	2.34553	12.0425	1.26	2	0	2
1.27	2.35932	12.1225	1.27	2	0	2
1.28	2.37311	12.2025	1.28	2	0	2
1.29	2.38690	12.2825	1.29	2	0	2
1.30	2.40069	12.3625	1.30	2	0	2
1.31	2.41448	12.4425	1.31	2	0	2
1.32	2.42827	12.5225	1.32	2	0	2
1.33	2.44206	12.6025	1.33	2	0	2
1.34	2.45585	12.6825	1.34	2	0	2
1.35	2.46964	12.7625	1.35	2	0	2
1.36	2.48343	12.8425	1.36	2	0	2
1.37	2.49722	12.9225	1.37	2	0	2
1.38	2.51101	13.0025	1.38	2	0	2
1.39	2.52480	13.0825	1.39	2	0	2
1.40	2.53859	13.1625	1.40	2	0	2
1.41	2.55238	13.2425	1.41	2	0	2
1.42	2.56617	13.3225	1.42	2	0	2
1.43	2.57996	13.4025	1.43	2	0	2
1.44	2.59375	13.4825	1.44	2	0	2
1.45	2.60754	13.5625	1.45	2	0	2
1.46	2.62133	13.6425	1.46	2	0	2
1.47	2.63512	13.7225	1.47	2	0	2
1.48	2.64891	13.8025	1.48	2	0	2
1.49	2.66270	13.8825	1.49	2	0	2
1.50	2.67649	13.9625	1.50	2	0	2
1.51	2.69028	14.0425	1.51	2	0	2
1.52	2.70407	14.1225	1.52	2	0	2
1.53	2.71786	14.2025	1.53	2	0	2
1.54	2.73165	14.2825	1.54	2	0	2
1.55	2.74544	14.3625	1.55	2	0	2
1.56	2.75923	14.4425	1.56	2	0	2
1.57	2.77302	14.5225	1.57	2	0	2
1.58	2.78681	14.6025	1.58	2	0	2
1.59	2.80060	14.6825	1.59	2	0	2
1.60	2.81439	14.7625	1.60	2	0	2
1.61	2.82818	14.8425	1.61	2	0	2
1.62	2.84197	14.9225	1.62	2	0	2
1.63	2.85576	15.0025	1.63	2	0	2
1.64	2.86955	15.0825	1.64	2	0	2
1.65	2.88334	15.1625	1.65	2	0	2
1.66	2.89713	15.2425	1.66	2	0	2
1.67	2.91092	15.3225	1.67	2	0	2
1.68	2.92471	15.4025	1.68	2	0	2
1.69	2.93850	15.4825	1.69	2	0	2
1.70	2.95229	15.5625	1.70	2	0	2
1.71	2.96608	15.6425	1.71	2	0	2
1.72	2.97987	15.7225	1.72	2	0	2
1.73	2.99366	15.8025	1.73	2	0	2
1.74	3.00745	15.8825	1.74	2	0	2
1.75	3.02124	15.9625	1.75	2	0	2
1.76	3.03503	16.0425	1.76	2	0	2
1.77	3.04882	16.1225	1.77	2	0	2
1.78	3.06261	16.2025	1.78	2	0	2
1.79	3.07640	16.2825	1.79	2	0	2
1.80	3.09019	16.3625	1.80	2	0	2
1.81	3.10398	16.4425	1.81	2	0	2
1.82	3.11777	16.5225	1.82	2	0	2
1.83	3.13156	16.6025	1.83	2	0	2
1.84	3.14535	16.6825	1.84	2	0	2
1.85	3.15914	16.7625	1.85	2	0	2
1.86	3.17293	16.8425	1.86	2	0	2
1.87	3.18672	16.9225	1.87	2	0	2
1.88	3.20051	17.0025	1.88	2	0	2
1.89	3.21430	17.0825	1.89	2	0	2
1.90	3.22809	17.1625	1.90	2	0	2
1.91	3.24188	17.2425	1.91	2	0	2
1.92	3.25567	17.3225	1.92	2	0	2
1.93	3.26946	17.4025	1.93	2	0	2
1.94	3.28325	17.4825	1.94	2	0	2
1.95	3.29704	17.5625	1.95	2	0	2
1.96	3.31083	17.6425	1.96	2	0	2
1.97	3.32462	17.7225	1.97	2	0	2
1.98	3.33841	17.8025	1.98	2	0	2
1.99	3.35220	17.8825	1.99	2	0	2
2.00	3.36599	17.9625	2.00	2	0	2

EXHAUST VALVE OPEN -- CYCLE COMPLETE

PHI = 3.07463 2000
 P2/P1 = 3.07463 2000
 P3/P1 = 3.07463 2000
 P4/P1 = 3.07463 2000
 P5/P1 = 3.07463 2000

Figure 15

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION PAUSE (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER WORK (JOULES)	FUEL IN STEP (FRACTION)	CUMULATIVE FUEL (FRACTION)
	FUEL INJECTION START AT 180		COMBUSTION COMMENCED			
180	.018487	10.1035	1090	0	0	0
185	.0182656	10.3717	1121.73	53.4259	.0374117	.0374117
190	.0180385	10.5152	1139.67	244.477	.071854	.109266
195	.0178072	11.5312	1227.42	570.197	.102352	.211618
200	.0175754	12.5037	1426.41	1052.25	.129334	.340953
	FUEL INJECTION STOP AT 320					
205	.0173435	12.8167	1455.63	1637.83	.153551	.494504
210	.0171112	11.8248	1333.14	1450.81	.203212	.697716
215	.0168784	11.1333	1253.84	1212.81	.2753379	.973054
220	.0166432	10.3312	1121.76	834.25	.285328	1.25838
225	.0164015	9.484	1073.73	519.74	.2844763	1.54286
230	.0161584	8.64555	1044.98	219.25	.2845459	1.82741
235	.0159133	7.83125	1011.5	71.93	.2845395	2.11195
240	.0156716	7.11436	1075.13	612.15	.284533	2.39648
245	.0154285	6.41373	1039.12	922.37	.284525	2.68101
250	.0151837	5.84582	1004.62	5367.82	.284517	2.96552
255	.0149359	5.38276	127.49	12355.8	.284504	3.25003
260	.0146823	4.8819	1240.22	11693	.284472	3.53454
265	.0144268	4.46737	1210.25	12443.5	.284439	3.81907
270	.0141699	4.03593	1181.56	13195.1	.284401	4.10358
275	.0139138	3.71223	1157.13	13576.2	.284351-23	4.38809
280	.0136475	3.41588	1135.55	14523.9	.284302-23	4.6726
285	.0133836	3.17655	1111.58	15123.5	.284253-23	4.95711
290	.0131153	2.95761	1091.24	15668.3	.284204-23	5.24162
295	.01284126	2.75736	1073.54	16222.6	.284155-23	5.52613
300	.0125659	2.6112	1057.86	16778.3	.284106-23	5.81064
305	.0122874	2.45552	1042.11	17121.3	.284057-23	6.09515
310	.0120081	2.33267	1025.87	17452.3	.284008-23	6.37966
315	.0117257	2.23446	1017.33	17833.8	.283959-23	6.66417
320	.0114355	2.13209	1008.65	18146.1	.28391-24	6.94868
325	.0111386	2.03425	998.274	18478.9	.283861-24	7.23319
330	.0108372	1.93973	986.653	18822.2	.283812-24	7.5177
335	.0105302	1.85619	984.924	19148.5	.283763-25	7.80221
			COMBUSTION COMPLETE			
340	.010219	1.8332	979.252	19283.3	0	8.08672
345	.0100016	1.85035	975.173	19321.1	0	8.37123
350	.0097784	1.86729	971.076	19352.3	0	8.65574
355	.0095488	1.88358	974.508	19377.1	0	8.94025
360	.0093133	1.89931	969.957	19397.7	0	9.22476
EXHAUST VALVE OPEN - - CYCLE COMPLETE						

LHV = 4.75122E+07
 LHV (C8H18) = 4.75122E+07
 LHV (C8H18) = 4.75122E+07
 LHV (C8H18) = 4.75122E+07
 LHV (C8H18) = 4.75122E+07

Figure 16

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION ANGLE (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER ACR (J/DEG)	FUEL IN STEP (FRACTION)	CUMULATIVE FUEL (FRACTION)
180	.0121487	12.1325	1298	0	0	0
	FUEL INJECTION START AT 185		COMBUSTION COMPLETED			
185	.0122285	12.3717	1121.73	53.4263	.0374117	.0374117
190	.0123083	12.3152	1195.87	244.477	.0718594	.109271
195	.0123881	11.5812	1207.43	572.837	.103853	.213124
200	.0124679	10.1837	1428.41	1232.25	.133364	.346488
205	.0125477	10.2167	1552.53	1837.63	.160392	.50688
	FUEL INJECTION STOP AT 205					
210	.0126275	11.6242	1583.14	2452.81	.185812	.692692
215	.0127073	11.1335	1522.54	3018.21	.209567	.902259
220	.0127871	10.3312	1325.79	3534.65	.231808	.934067
225	.0128669	9.464	1478.73	4051.74	.252493	.98656
230	.0129467	8.64553	1448.98	4568.25	.271659	.998219
235	.0130265	7.55106	1411.5	5084.75	.289363	.999782
240	.0131063	7.11435	1375.15	5591.15	.305659	.999999
245	.0131861	6.44373	1339.12	6087.97	.320595	.999999
250	.0132659	5.64252	1284.52	6575.22	.334211	.999999
255	.0133457	5.32576	1271.49	7052.8	.346554	.999999
260	.0134255	4.82919	1240.82	7530.8	.357672	.999999
265	.0135053	4.42737	1212.26	8009.5	.367619	.999999
270	.0135851	4.23683	1182.58	8488.1	.376431	.999999
275	.0136649	3.71229	1157.18	8966.2	.384155	.999999
280	.0137447	3.42582	1132.53	9444.9	.390831	.999999
285	.0138245	3.17625	1111.56	9923.5	.396499	.999999
290	.0139043	2.95751	1091.54	10402.5	.401199	.999999
295	.0139841	2.76735	1072.54	10881.8	.404952	.999999
300	.0140639	2.5812	1053.28	11361.3	.407799	.999999
305	.0141437	2.45552	1033.11	11840.8	.409795	.999999
310	.0142235	2.33207	1012.27	12320.3	.410982	.999999
315	.0143033	2.22445	991.73	12800.8	.411399	.999999
320	.0143831	2.13223	972.53	13281.3	.411055	.999999
325	.0144629	2.05438	953.874	13761.8	.409999	.999999
330	.0145427	1.98979	935.833	14242.3	.408299	.999999
335	.0146225	1.93819	918.524	14722.8	.405999	.999999
			COMBUSTION COMPLETED			
340	.0147023	1.8932	902.252	15203.3	.403199	.999999
345	.0147821	1.86339	887.179	15683.8	.400055	.999999
350	.0148619	1.83719	872.276	16164.3	.396599	.999999
355	.0149417	1.82356	858.536	16644.8	.392899	.999999
360	.0150215	1.81921	845.957	17125.3	.388999	.999999
	EXHAUST VALVE OPEN - - CYCLE COMPLETE					

IMEP = 4.75222 BAR
 LOWER / 4 STROKE = 195.735 KJ/KG
 SPECIFIC FUEL CONSUMPTION = 2.24422E-23 KG/KW-HR
 THERMAL EFFICIENCY = 41.9322 PERCENT

Figure 17
-67-

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION ANGLE (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER WORK (Joules)	FUEL IN BURN (FRACTION)	CUMULATIVE FUEL (FRACTION)
180	.2131467	12.1025	1090	0	0	0
185	.2132855	10.7238	1084.35	52.4157	0	0
	FUEL INJECTION STARTS AT 182 DEGREES, COMPRESSION					
190	.2133921	10.135	1071.71	121.583	.007070	.007070
195	.2134782	11.6116	1087.76	221.443	.0070683	.0141383
200	.2135475	11.0035	1091.44	321.603	.007068	.0212063
205	.213596	11.5022	1093.41	421.31	.007065	.0282713
210	.2136318	11.4391	1076.14	521.64	.007064	.0353353
	FUEL INJECTION STOP AT 212					
215	.2136584	11.3358	1024.83	621	.0022552	.0375905
220	.2136722	10.331	1027.73	721.69	.0070584	.0446489
225	.2136815	9.57282	1030.99	821.65	.0049439	.0495928
230	.2136854	9.78118	1077.81	921.63	.004234	.0538268
235	.2136832	8.2357	1047.78	1021.37	.002211	.0560378
240	.2136716	7.15451	1008.84	1121.63	.0017038	.0577416
245	.2136555	6.0533	1071.34	1221.21	.001721	.0594626
250	.2136317	5.02587	1042.82	1321.51	.00165528	.0611179
255	.2135999	5.45923	1010.63	1421.7	.0015453	.0626632
260	.2135423	4.365	1020.81	1521.9	.0016344	.0642976
265	.2134733	4.55337	1051.45	1621.3	.0015239	.0658215
270	.2133875	4.17885	1022.31	1721.6	.0016511	.0674726
275	.2132858	3.64355	1058.33	1821.5	.0015974	.06907
280	.2131471	3.55421	1175.61	1921.4	.0017682-23	.0708382
285	.2129656	3.8364	1154.38	2021.3	.0015133-23	.0723515
290	.2127169	3.07418	1130.64	2121.5	.0017682-23	.0741197
295	.2124135	2.87685	1119.35	2221.2	.0015344-23	.0756541
300	.2120553	2.71733	1120.53	2321.7	.001511-23	.0771651
305	.2116574	2.5531	1030.97	2421.1	.0015143-23	.0786794
310	.2112301	2.40131	1078.65	2521	.0016378-23	.0803172
315	.2107817	2.33112	1181.55	2621.5	.0015441-23	.0818613
320	.2103135	2.33558	1051.53	2721.3	.0015111-23	.0834124
325	.2098133	2.14727	1043.17	2821.3	.0015372-23	.0849596
330	.2092872	2.03415	1020.68	2921.1	.00153612-24	.0865027
335	.2087352	2.12557	1030.95	3021.4	.0015352-24	.088043
340	.2081621	1.96147	1024.9	3121.7	.00153562-24	.0895802
345	.2075816	1.94735	1012.75	3221.2	.0015352-25	.0911154
	COMBUSTION COMPLETED					
350	.2069854	1.91113	1017.74	3321.5	0	.0926469
355	.2063468	1.92389	1015.93	3421.6	0	.0941887
360	.2056743	1.90413	1015.33	3521.6	0	.09573
EXHAUST VALVE OPEN --- CYCLE COMPLETE						

1450 = 4.2153 8095
 1000 = 103.421 1000000
 1000000 = 1000000 1000000
 1000000 = 1000000 1000000
 1000000 = 1000000 1000000

Figure 18
 -68-

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION RATIO (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER PRESSURE (BAR)	FUEL RATIO (FRACTION)	CUMULATIVE FUEL (FRACTION)
180	.2101467	12.1235	1258	2	2	2
179	.2101856	12.1233	1254.35	23.4157	2	2
178	.2102245	9.75568	1274.67	233.45	2	2
177	FUEL INJECTION START AT 180		COMBUSTION COMMENCED			
176	.2102634	9.75483	1274.65	232.897	.023-34	.023-34
175	.2103023	9.35338	1274.64	232.438	.037-43	.060-77
174	.2103412	8.95193	1274.63	231.979	.051-52	.111-29
173	.2103801	8.55048	1274.62	231.520	.065-61	.176-90
172	FUEL INJECTION STOP AT 215			231.061	.079-70	.255-60
171	.2104190	8.14903	1274.61	230.602	.093-79	.348-39
170	.2104579	7.74758	1274.60	230.143	.107-88	.455-27
169	.2104968	7.34613	1274.59	229.684	.121-97	.576-24
168	.2105357	6.94468	1274.58	229.225	.135-106	.711-34
167	.2105746	6.54323	1274.57	228.766	.149-115	.860-49
166	.2106135	6.14178	1274.56	228.307	.163-124	1.023-63
165	.2106524	5.74033	1274.55	227.848	.177-133	1.200-77
164	.2106913	5.33888	1274.54	227.389	.191-142	1.391-91
163	.2107302	4.93743	1274.53	226.930	.205-151	1.596-06
162	.2107691	4.53598	1274.52	226.471	.219-160	1.815-16
161	.2108080	4.13453	1274.51	226.012	.233-169	2.048-30
160	.2108469	3.73308	1274.50	225.553	.247-178	2.295-48
159	.2108858	3.33163	1274.49	225.094	.261-187	2.556-66
158	.2109247	2.93018	1274.48	224.635	.275-196	2.831-84
157	.2109636	2.52873	1274.47	224.176	.289-205	3.119-99
156	.2110025	2.12728	1274.46	223.717	.303-214	3.420-13
155	.2110414	1.72583	1274.45	223.258	.317-223	3.734-36
154	.2110803	1.32438	1274.44	222.799	.331-232	4.061-58
153	.2111192	0.92293	1274.43	222.340	.345-241	4.400-79
152	.2111581	0.52148	1274.42	221.881	.359-250	4.751-00
151	.2111970	0.11993	1274.41	221.422	.373-259	5.113-19
150	.2112359	0.00000	1274.40	220.963	.387-268	5.486-38
149	.2112748		1274.39	220.504	.401-277	5.870-57
148	.2113137		1274.38	220.045	.415-286	6.265-76
147	.2113526		1274.37	219.586	.429-295	6.671-95
146	.2113915		1274.36	219.127	.443-304	7.088-14
145	.2114304		1274.35	218.668	.457-313	7.515-33
144	.2114693		1274.34	218.209	.471-322	7.952-52
143	.2115082		1274.33	217.750	.485-331	8.399-71
142	.2115471		1274.32	217.291	.499-340	8.856-90
141	.2115860		1274.31	216.832	.513-349	9.324-09
140	.2116249		1274.30	216.373	.527-358	9.801-28
139	.2116638		1274.29	215.914	.541-367	1.027-47
138	.2117027		1274.28	215.455	.555-376	1.073-66
137	.2117416		1274.27	214.996	.569-385	1.119-85
136	.2117805		1274.26	214.537	.583-394	1.165-104
135	.2118194		1274.25	214.078	.597-403	1.211-123
134	.2118583		1274.24	213.619	.611-412	1.257-142
133	.2118972		1274.23	213.160	.625-421	1.303-161
132	.2119361		1274.22	212.701	.639-430	1.349-180
131	.2119750		1274.21	212.242	.653-439	1.395-199
130	.2120139		1274.20	211.783	.667-448	1.441-218
129	.2120528		1274.19	211.324	.681-457	1.487-237
128	.2120917		1274.18	210.865	.695-466	1.533-256
127	.2121306		1274.17	210.406	.709-475	1.579-275
126	.2121695		1274.16	209.947	.723-484	1.625-294
125	.2122084		1274.15	209.488	.737-493	1.671-313
124	.2122473		1274.14	209.029	.751-502	1.717-332
123	.2122862		1274.13	208.570	.765-511	1.763-351
122	.2123251		1274.12	208.111	.779-520	1.809-370
121	.2123640		1274.11	207.652	.793-529	1.855-389
120	.2124029		1274.10	207.193	.807-538	1.901-408
119	.2124418		1274.09	206.734	.821-547	1.947-427
118	.2124807		1274.08	206.275	.835-556	1.993-446
117	.2125196		1274.07	205.816	.849-565	2.039-465
116	.2125585		1274.06	205.357	.863-574	2.085-484
115	.2125974		1274.05	204.898	.877-583	2.131-503
114	.2126363		1274.04	204.439	.891-592	2.177-522
113	.2126752		1274.03	203.980	.905-601	2.223-541
112	.2127141		1274.02	203.521	.919-610	2.269-560
111	.2127530		1274.01	203.062	.933-619	2.315-579
110	.2127919		1274.00	202.603	.947-628	2.361-598
109	.2128308		1273.99	202.144	.961-637	2.407-617
108	.2128697		1273.98	201.685	.975-646	2.453-636
107	.2129086		1273.97	201.226	.989-655	2.499-655
106	.2129475		1273.96	200.767	1.003-664	2.545-674
105	.2129864		1273.95	200.308	1.017-673	2.591-693
104	.2130253		1273.94	199.849	1.031-682	2.637-712
103	.2130642		1273.93	199.390	1.045-691	2.683-731
102	.2131031		1273.92	198.931	1.059-700	2.729-750
101	.2131420		1273.91	198.472	1.073-709	2.775-769
100	.2131809		1273.90	198.013	1.087-718	2.821-788
99	.2132198		1273.89	197.554	1.101-727	2.867-807
98	.2132587		1273.88	197.095	1.115-736	2.913-826
97	.2132976		1273.87	196.636	1.129-745	2.959-845
96	.2133365		1273.86	196.177	1.143-754	3.005-864
95	.2133754		1273.85	195.718	1.157-763	3.051-883
94	.2134143		1273.84	195.259	1.171-772	3.097-902
93	.2134532		1273.83	194.800	1.185-781	3.143-921
92	.2134921		1273.82	194.341	1.199-790	3.189-940
91	.2135310		1273.81	193.882	1.213-799	3.235-959
90	.2135699		1273.80	193.423	1.227-808	3.281-978
89	.2136088		1273.79	192.964	1.241-817	3.327-997
88	.2136477		1273.78	192.505	1.255-826	3.373-1016
87	.2136866		1273.77	192.046	1.269-835	3.419-1035
86	.2137255		1273.76	191.587	1.283-844	3.465-1054
85	.2137644		1273.75	191.128	1.297-853	3.511-1073
84	.2138033		1273.74	190.669	1.311-862	3.557-1092
83	.2138422		1273.73	190.210	1.325-871	3.603-1111
82	.2138811		1273.72	189.751	1.339-880	3.649-1130
81	.2139200		1273.71	189.292	1.353-889	3.695-1149
80	.2139589		1273.70	188.833	1.367-898	3.741-1168
79	.2139978		1273.69	188.374	1.381-907	3.787-1187
78	.2140367		1273.68	187.915	1.395-916	3.833-1206
77	.2140756		1273.67	187.456	1.409-925	3.879-1225
76	.2141145		1273.66	186.997	1.423-934	3.925-1244
75	.2141534		1273.65	186.538	1.437-943	3.971-1263
74	.2141923		1273.64	186.079	1.451-952	4.017-1282
73	.2142312		1273.63	185.620	1.465-961	4.063-1301
72	.2142701		1273.62	185.161	1.479-970	4.109-1320
71	.2143090		1273.61	184.702	1.493-979	4.155-1339
70	.2143479		1273.60	184.243	1.507-988	4.201-1358
69	.2143868		1273.59	183.784	1.521-997	4.247-1377
68	.2144257		1273.58	183.325	1.535-1006	4.293-1396
67	.2144646		1273.57	182.866	1.549-1015	4.339-1415
66	.2145035		1273.56	182.407	1.563-1024	4.385-1434
65	.2145424		1273.55	181.948	1.577-1033	4.431-1453
64	.2145813		1273.54	181.489	1.591-1042	4.477-1472
63	.2146202		1273.53	181.030	1.605-1051	4.523-1491
62	.2146591		1273.52	180.571	1.619-1060	4.569-1510
61	.2146980		1273.51	180.112	1.633-1069	4.615-1529
60	.2147369		1273.50	179.653	1.647-1078	4.661-1548
59	.2147758		1273.49	179.194	1.661-1087	4.707-1567
58	.2148147		1273.48	178.735	1.675-1096	4.753-1586
57	.2148536		1273.47	178.276	1.689-1105	4.799-1605
56	.2148925		1273.46	177.817	1.703-1114	4.845-1624
55	.2149314		1273.45	177.358	1.717-1123	4.891-1643
54	.2149703		1273.44	176.899	1.731-1132	4.937-1662
53	.2150092		1273.43	176.440	1.745-1141	4.983-1681
52	.2150481		1273.42	175.981	1.759-1150	5.029-1700
51	.2150870		1273.41	175.522	1.773-1159	5.075-1719
50	.2151259		1273.40	175.063	1.787-1168	5.121-1738
49	.2151648		1273.39	174.604	1.801-1177	5.167-1757
48	.2152037		1273.38	174.145	1.815-1186	5.213-1776
47	.2152426		1273.37	173.686	1.829-1195	5.259-1795
46	.2152815		1273.36	173.227	1.843-1204	5.305-1814
45	.2153204		1273.35	172.768	1.857-1213	5.351-1833
44	.2153593		1273.34	172.309	1.871-1222	5.397-1852
43	.2153982		1273.33	171.850	1.885-1231	5.443-1871
42	.2154371		1273.32	171.391	1.899-1240	5.489-1890
41	.2154760		1273.31	170.932	1.913-1249	5.535-1909
40	.2155149		1273.30	170.473	1.927-1258	5.

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION ANGLE (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER WORK (JOULES)	FUEL IN STEP (FRACTION)	CYL. LATIVE FUEL (FRACTION)
.00	.000000	10.1325	1090	0	0	0
.05	.000000	10.1325	1090.36	58.4157	0	0
.10	.000000	9.75566	1074.67	102.45	0	0
.15	.000000	9.38235	1051.24	157.681	0	0
FUEL INJECTION START AT 222 COMPLETION COMPLETED						
.20	.000000	9.04000	1024.43	225.15	.000000	.000000
.25	.000000	8.73221	1001.94	303.73	.000000	.000000
.30	.000000	8.43919	978.11	394.54	.000000	.000000
.35	.000000	8.16166	954.07	498.75	.000000	.000000
.40	.000000	7.90000	930.13	615.34	.000000	.000000
FUEL INJECTION STOP AT 222						
.45	.000000	7.65374	906.9	744.94	.000000	.000000
.50	.000000	7.42225	884.68	887.48	.000000	.000000
.55	.000000	7.20422	863.66	1043.53	.000000	.000000
.60	.000000	7.00000	843.81	1213.41	.000000	.000000
.65	.000000	6.80841	825.03	1397.19	.000000	.000000
.70	.000000	6.62861	807.25	1594.82	.000000	.000000
.75	.000000	6.46000	790.43	1806.4	.000000	.000000
.80	.000000	6.30278	774.56	2032.1	.000000	.000000
.85	.000000	6.15699	759.63	2272.2	.000000	.000000
.90	.000000	6.02172	745.64	2526.7	.000000	.000000
.95	.000000	5.89646	732.63	2795.5	.000000	.000000
1.00	.000000	5.78071	720.61	3078.6	.000000	.000000
1.05	.000000	5.67386	709.54	3376.4	.000000	.000000
1.10	.000000	5.57597	700.6	3689.5	.000000	.000000
1.15	.000000	5.48647	692.8	4017.8	.000000-23	.000000
1.20	.000000	5.40576	686.05	4361.6	.000000-23	.000000
1.25	.000000	5.33381	679.91	4720.7	.000000-23	.000000
1.30	.000000	5.27023	674.25	5095.7	.000000-23	.000000
1.35	.000000	5.21555	669.07	5487.1	.000000-23	.000000
1.40	.000000	5.16935	664.38	5895.7	.000000-23	.000000
1.45	.000000	5.13145	660.16	6322.4	.000000-23	.000000
1.50	.000000	5.09154	656.36	6767.3	.000000-23	.000000
1.55	.000000	5.05933	652.98	7230.7	.000000-23	.000000
1.60	.000000	5.03452	649.93	7713.2	.000000-23	.000000
1.65	.000000	5.01674	647.15	8215.1	.000000-23	.000000
1.70	.000000	5.00564	644.67	8736.1	.000000-23	.000000
1.75	.000000	5.00000	642.43	9276.2	.000000-23	.000000
1.80	.000000	5.00000	640.43	9836.2	.000000-23	.000000
1.85	.000000	5.00000	638.67	10416.2	.000000-23	.000000
1.90	.000000	5.00000	637.15	11016.2	.000000-23	.000000
1.95	.000000	5.00000	635.87	11636.2	.000000-23	.000000
2.00	.000000	5.00000	634.82	12276.2	.000000-23	.000000

EXHAUST VALVE OPEN - - CYCLE COMPLETE

LHV = 4.2E+07 5493
 LHV (C8H18) = 42000000
 LHV (C8H18) = 42000000
 LHV (C8H18) = 42000000

Figure 20

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION ANGLE (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER WORK (Joules)	FUEL IN STEP (FRACTION)	CUMULATIVE FUEL (FRACTION)
180	.000487	12.1325	1250	0	0	0
175	.0009255	12.2223	1254.35	35.457	0	0
170	.0013635	12.3123	1258.57	102.45	0	0
165	.0018012	12.4023	1262.84	187.601	0	0
160	.0022387	12.4923	1267.17	273.811	0	0
155	FUEL INJECTION STEP AT 155 225		2035.510, COMPRESS		0	0
150	.0026758	12.5823	1271.51	360.021	.000487	.000487
145	.0031125	12.6723	1275.84	446.231	.0009255	.0014125
140	.0035487	12.7623	1280.17	532.441	.0013635	.002776
135	.0039845	12.8523	1284.5	618.651	.0018012	.0045772
130	.0044197	12.9423	1288.84	704.861	.0022387	.0068159
125	.0048545	13.0323	1293.17	791.071	.0026758	.0094917
120	FUEL INJECTION STEP AT 120 236		2035.510, COMPRESS		0	0
115	.0052887	13.1223	1297.5	877.281	.0031125	.0126042
110	.0057225	13.2123	1301.84	963.491	.0035487	.0161529
105	.0061558	13.3023	1306.17	1049.7	.0039845	.0196974
100	.0065887	13.3923	1310.5	1135.91	.0044197	.0232419
95	.0070212	13.4823	1314.84	1222.12	.0048545	.0267864
90	.0074535	13.5723	1319.17	1308.33	.0052887	.0303309
85	.0078855	13.6623	1323.5	1394.54	.0057225	.0338754
80	.0083172	13.7523	1327.84	1480.75	.0061558	.0374199
75	.0087487	13.8423	1332.17	1566.96	.0065887	.0409644
70	.0091797	13.9323	1336.5	1653.17	.0070212	.0445089
65	.0096102	14.0223	1340.84	1739.38	.0074535	.0480534
60	.0100407	14.1123	1345.17	1825.59	.0078855	.0515979
55	.0104707	14.2023	1349.5	1911.8	.0083172	.0551424
50	.0108997	14.2923	1353.84	1998.01	.0087487	.0586869
45	.0113287	14.3823	1358.17	2084.22	.0091797	.0622314
40	.0117572	14.4723	1362.5	2170.43	.0096102	.0657759
35	.0121852	14.5623	1366.84	2256.64	.0100407	.0693204
30	.0126127	14.6523	1371.17	2342.85	.0104707	.0728649
25	.0130397	14.7423	1375.5	2429.06	.0108997	.0764094
20	.0134657	14.8323	1379.84	2515.27	.0113287	.0799539
15	.0138907	14.9223	1384.17	2601.48	.0117572	.0834984
10	.0143152	15.0123	1388.5	2687.69	.0121852	.0870429
5	.0147392	15.1023	1392.84	2773.9	.0126127	.0905874
0	.0151627	15.1923	1397.17	2860.11	.0130397	.0941319
360	.0155857	15.2823	1401.5	2946.32	.0134657	.0976764
355	.0160082	15.3723	1405.84	3032.53	.0138907	.1012209
350	.0164307	15.4623	1410.17	3118.74	.0143152	.1047654
345	.0168527	15.5523	1414.5	3204.95	.0147392	.1083099
340	.0172742	15.6423	1418.84	3291.16	.0151627	.1118544
335	.0176957	15.7323	1423.17	3377.37	.0155857	.1153989
330	.0181172	15.8223	1427.5	3463.58	.0160082	.1189434
325	.0185387	15.9123	1431.84	3549.79	.0164307	.1224879
320	.0189597	16.0023	1436.17	3636.0	.0168527	.1260324
315	.0193807	16.0923	1440.5	3722.21	.0172742	.1295769
310	.0198012	16.1823	1444.84	3808.42	.0176957	.1331214
305	.0202217	16.2723	1449.17	3894.63	.0181172	.1366659
300	.0206422	16.3623	1453.5	3980.84	.0185387	.1402104
295	.0210627	16.4523	1457.84	4067.05	.0189597	.1437549
290	.0214832	16.5423	1462.17	4153.26	.0193807	.1472994
285	.0219037	16.6323	1466.5	4239.47	.0198012	.1508439
280	.0223242	16.7223	1470.84	4325.68	.0202217	.1543884
275	.0227447	16.8123	1475.17	4411.89	.0206422	.1579329
270	.0231652	16.9023	1479.5	4498.1	.0210627	.1614774
265	.0235857	17.0000	1483.84	4584.31	.0214832	.1650219
260	.0240062	17.0923	1488.17	4670.52	.0219037	.1685664
255	.0244267	17.1823	1492.5	4756.73	.0223242	.1721109
250	.0248472	17.2723	1496.84	4842.94	.0227447	.1756554
245	.0252677	17.3623	1501.17	4929.15	.0231652	.1791999
240	.0256882	17.4523	1505.5	5015.36	.0235857	.1827444
235	.0261087	17.5423	1509.84	5101.57	.0240062	.1862889
230	.0265292	17.6323	1514.17	5187.78	.0244267	.1898334
225	.0269497	17.7223	1518.5	5273.99	.0248472	.1933779
220	.0273702	17.8123	1522.84	5360.2	.0252677	.1969224
215	.0277907	17.9023	1527.17	5446.41	.0256882	.2004669
210	.0282112	18.0000	1531.5	5532.62	.0261087	.2040114
205	.0286317	18.0923	1535.84	5618.83	.0265292	.2075559
200	.0290522	18.1823	1540.17	5705.04	.0269497	.2111004
195	.0294727	18.2723	1544.5	5791.25	.0273702	.2146449
190	.0298932	18.3623	1548.84	5877.46	.0277907	.2181894
185	.0303137	18.4523	1553.17	5963.67	.0282112	.2217339
180	.0307342	18.5423	1557.5	6049.88	.0286317	.2252784
175	.0311547	18.6323	1561.84	6136.09	.0290522	.2288229
170	.0315752	18.7223	1566.17	6222.3	.0294727	.2323674
165	.0319957	18.8123	1570.5	6308.51	.0298932	.2359119
160	.0324162	18.9023	1574.84	6394.72	.0303137	.2394564
155	.0328367	19.0000	1579.17	6480.93	.0307342	.2430009
150	.0332572	19.0923	1583.5	6567.14	.0311547	.2465454
145	.0336777	19.1823	1587.84	6653.35	.0315752	.2500899
140	.0340982	19.2723	1592.17	6739.56	.0319957	.2536344
135	.0345187	19.3623	1596.5	6825.77	.0324162	.2571789
130	.0349392	19.4523	1600.84	6911.98	.0328367	.2607234
125	.0353597	19.5423	1605.17	6998.19	.0332572	.2642679
120	.0357802	19.6323	1609.5	7084.4	.0336777	.2678124
115	.0362007	19.7223	1613.84	7170.61	.0340982	.2713569
110	.0366212	19.8123	1618.17	7256.82	.0345187	.2749014
105	.0370417	19.9023	1622.5	7343.03	.0349392	.2784459
100	.0374622	20.0000	1626.84	7429.24	.0353597	.2819904
95	.0378827	20.0923	1631.17	7515.45	.0357802	.2855349
90	.0383032	20.1823	1635.5	7601.66	.0362007	.2890794
85	.0387237	20.2723	1639.84	7687.87	.0366212	.2926239
80	.0391442	20.3623	1644.17	7774.08	.0370417	.2961684
75	.0395647	20.4523	1648.5	7860.29	.0374622	.2997129
70	.0400002	20.5423	1652.84	7946.5	.0378827	.3032574
65	.0404207	20.6323	1657.17	8032.71	.0383032	.3068019
60	.0408412	20.7223	1661.5	8118.92	.0387237	.3103464
55	.0412617	20.8123	1665.84	8205.13	.0391442	.3138909
50	.0416822	20.9023	1670.17	8291.34	.0395647	.3174354
45	.0421027	21.0000	1674.5	8377.55	.0400002	.3209799
40	.0425232	21.0923	1678.84	8463.76	.0404207	.3245244
35	.0429437	21.1823	1683.17	8549.97	.0408412	.3280689
30	.0433642	21.2723	1687.5	8636.18	.0412617	.3316134
25	.0437847	21.3623	1691.84	8722.39	.0416822	.3351579
20	.0442052	21.4523	1696.17	8808.6	.0421027	.3387024
15	.0446257	21.5423	1700.5	8894.81	.0425232	.3422469
10	.0450462	21.6323	1704.84	8981.02	.0429437	.3457914
5	.0454667	21.7223	1709.17	9067.23	.0433642	.3493359
0	.0458872	21.8123	1713.5	9153.44	.0437847	.3528804
360	.0463077	21.9023	1717.84	9239.65	.0442052	.3564249
355	.0467282	22.0000	1722.17	9325.86	.0446257	.3599694
350	.0471487	22.0923	1726.5	9412.07	.0450462	.3635139
345	.0475692	22.1823	1730.84	9498.28	.0454667	.3670584
340	.0479897	22.2723	1735.17	9584.49	.0458872	.3706029
335	.0484102	22.3623	1739.5	9670.7	.0463077	.3741474
330	.0488307	22.4523	1743.84	9756.91	.0467282	.3776919
325	.0492512	22.5423	1748.17	9843.12	.0471487	.3812364
320	.0496717	22.6323	1752.5	9929.33	.0475692	.3847809
315	.0500922	22.7223	1756.84	10015.54	.0479897	.3883254
310	.0505127	22.8123	1761.17	10101.75	.0484102	.3918699
305	.0509332	22.9023	1765.5	10187.96	.0488307	.3954144
300	.0513537	23.0000	1769.84	10274.17	.0492512	.3989589
295	.0517742	23.0923	1774.17	10360.38	.0496717	.4025034
290	.0521947	23.1823	1778.5	10446.59	.0500922	.4060479
285	.0526152	23.2723	1782.84	10532.8	.0505127	.4095924
280	.0530357	23.3623	1787.17	10619.01	.0509332	.4131369
275	.0534562	23.4523	1791.5	10705.22	.0513537	.4166814
270	.0538767	23.5423	1795.84	10791.43	.0517742	.4202259
265	.0542972	23.6323	1800.17	10877.64	.0521947	.4237704
260	.0547177	23.7223	1804.5	10963.85	.0526152	.4273149
255	.0551382	23.8123	1808.84	11050.06	.0530357	.4308594
250	.0555587	23.9023	1813.17	11136.27	.0534562	.4344039
245	.0559792	24.0000	1817.5	11222.48	.0538767	.4379484
240	.0563997	24.0923	1821.84	11308.69	.0542972	.4414929
235	.0568202	24.1823	1826.17	11394.9	.0547177	.4450374
230	.0572407					

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION STEP (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (N/M ²)	CYLINDER TEMPERATURE (DEG K)	CYLINDER WORK (Joules)	FUEL IN STEP (FRACTION)	CUMULATIVE FUEL (FRACTION)
150	.002487	12.1025	1232	0	0	0
155	.002487	12.1025	1232	0	0	0
160	.002487	12.1025	1232	0	0	0
165	.002487	12.1025	1232	0	0	0
170	.002487	12.1025	1232	0	0	0
175	.002487	12.1025	1232	0	0	0
180	.002487	12.1025	1232	0	0	0
185	.002487	12.1025	1232	0	0	0
190	.002487	12.1025	1232	0	0	0
195	.002487	12.1025	1232	0	0	0
200	.002487	12.1025	1232	0	0	0
205	.002487	12.1025	1232	0	0	0
210	.002487	12.1025	1232	0	0	0
215	.002487	12.1025	1232	0	0	0
220	.002487	12.1025	1232	0	0	0
225	.002487	12.1025	1232	0	0	0
230	.002487	12.1025	1232	0	0	0
235	.002487	12.1025	1232	0	0	0
240	.002487	12.1025	1232	0	0	0
245	.002487	12.1025	1232	0	0	0
250	.002487	12.1025	1232	0	0	0
255	.002487	12.1025	1232	0	0	0
260	.002487	12.1025	1232	0	0	0
265	.002487	12.1025	1232	0	0	0
270	.002487	12.1025	1232	0	0	0
275	.002487	12.1025	1232	0	0	0
280	.002487	12.1025	1232	0	0	0
285	.002487	12.1025	1232	0	0	0
290	.002487	12.1025	1232	0	0	0
295	.002487	12.1025	1232	0	0	0
300	.002487	12.1025	1232	0	0	0
305	.002487	12.1025	1232	0	0	0
310	.002487	12.1025	1232	0	0	0
315	.002487	12.1025	1232	0	0	0
320	.002487	12.1025	1232	0	0	0
325	.002487	12.1025	1232	0	0	0
330	.002487	12.1025	1232	0	0	0
335	.002487	12.1025	1232	0	0	0
340	.002487	12.1025	1232	0	0	0
345	.002487	12.1025	1232	0	0	0
350	.002487	12.1025	1232	0	0	0
355	.002487	12.1025	1232	0	0	0
360	.002487	12.1025	1232	0	0	0
365	.002487	12.1025	1232	0	0	0
370	.002487	12.1025	1232	0	0	0
375	.002487	12.1025	1232	0	0	0
380	.002487	12.1025	1232	0	0	0
385	.002487	12.1025	1232	0	0	0
390	.002487	12.1025	1232	0	0	0
395	.002487	12.1025	1232	0	0	0
400	.002487	12.1025	1232	0	0	0
405	.002487	12.1025	1232	0	0	0
410	.002487	12.1025	1232	0	0	0
415	.002487	12.1025	1232	0	0	0
420	.002487	12.1025	1232	0	0	0
425	.002487	12.1025	1232	0	0	0
430	.002487	12.1025	1232	0	0	0
435	.002487	12.1025	1232	0	0	0
440	.002487	12.1025	1232	0	0	0
445	.002487	12.1025	1232	0	0	0
450	.002487	12.1025	1232	0	0	0
455	.002487	12.1025	1232	0	0	0
460	.002487	12.1025	1232	0	0	0
465	.002487	12.1025	1232	0	0	0
470	.002487	12.1025	1232	0	0	0
475	.002487	12.1025	1232	0	0	0
480	.002487	12.1025	1232	0	0	0
485	.002487	12.1025	1232	0	0	0
490	.002487	12.1025	1232	0	0	0
495	.002487	12.1025	1232	0	0	0
500	.002487	12.1025	1232	0	0	0
505	.002487	12.1025	1232	0	0	0
510	.002487	12.1025	1232	0	0	0
515	.002487	12.1025	1232	0	0	0
520	.002487	12.1025	1232	0	0	0
525	.002487	12.1025	1232	0	0	0
530	.002487	12.1025	1232	0	0	0
535	.002487	12.1025	1232	0	0	0
540	.002487	12.1025	1232	0	0	0
545	.002487	12.1025	1232	0	0	0
550	.002487	12.1025	1232	0	0	0
555	.002487	12.1025	1232	0	0	0
560	.002487	12.1025	1232	0	0	0
565	.002487	12.1025	1232	0	0	0
570	.002487	12.1025	1232	0	0	0
575	.002487	12.1025	1232	0	0	0
580	.002487	12.1025	1232	0	0	0
585	.002487	12.1025	1232	0	0	0
590	.002487	12.1025	1232	0	0	0
595	.002487	12.1025	1232	0	0	0
600	.002487	12.1025	1232	0	0	0
605	.002487	12.1025	1232	0	0	0
610	.002487	12.1025	1232	0	0	0
615	.002487	12.1025	1232	0	0	0
620	.002487	12.1025	1232	0	0	0
625	.002487	12.1025	1232	0	0	0
630	.002487	12.1025	1232	0	0	0
635	.002487	12.1025	1232	0	0	0
640	.002487	12.1025	1232	0	0	0
645	.002487	12.1025	1232	0	0	0
650	.002487	12.1025	1232	0	0	0
655	.002487	12.1025	1232	0	0	0
660	.002487	12.1025	1232	0	0	0
665	.002487	12.1025	1232	0	0	0
670	.002487	12.1025	1232	0	0	0
675	.002487	12.1025	1232	0	0	0
680	.002487	12.1025	1232	0	0	0
685	.002487	12.1025	1232	0	0	0
690	.002487	12.1025	1232	0	0	0
695	.002487	12.1025	1232	0	0	0
700	.002487	12.1025	1232	0	0	0
705	.002487	12.1025	1232	0	0	0
710	.002487	12.1025	1232	0	0	0
715	.002487	12.1025	1232	0	0	0
720	.002487	12.1025	1232	0	0	0
725	.002487	12.1025	1232	0	0	0
730	.002487	12.1025	1232	0	0	0
735	.002487	12.1025	1232	0	0	0
740	.002487	12.1025	1232	0	0	0
745	.002487	12.1025	1232	0	0	0
750	.002487	12.1025	1232	0	0	0
755	.002487	12.1025	1232	0	0	0
760	.002487	12.1025	1232	0	0	0
765	.002487	12.1025	1232	0	0	0
770	.002487	12.1025	1232	0	0	0
775	.002487	12.1025	1232	0	0	0
780	.002487	12.1025	1232	0	0	0
785	.002487	12.1025	1232	0	0	0
790	.002487	12.1025	1232	0	0	0
795	.002487	12.1025	1232	0	0	0
800	.002487	12.1025	1232	0	0	0
805	.002487	12.1025	1232	0	0	0
810	.002487	12.1025	1232	0	0	0
815	.002487	12.1025	1232	0	0	0
820	.002487	12.1025	1232	0	0	0
825	.002487	12.1025	1232	0	0	0
830	.002487	12.1025	1232	0	0	0
835	.002487	12.1025	1232	0	0	0
840	.002487	12.1025	1232	0	0	0
845	.002487	12.1025	1232	0	0	0
850	.002487	12.1025	1232	0	0	0
855	.002487	12.1025	1232	0	0	0
860	.002487	12.1025	1232	0	0	0
865	.002487	12.1025	1232	0	0	0
870	.002487	12.1025	1232	0	0	0
875	.002487	12.1025	1232	0	0	0
880	.002487	12.1025	1232	0	0	0
885	.002487	12.1025	1232	0	0	0
890	.002487	12.1025	1232	0	0	0
895	.002487	12.1025	1232	0	0	0
900	.002487	12.1025	1232	0	0	0
905	.002487	12.1025	1232	0	0	0
910	.002487	12.1025	1232	0	0	0
915	.002487	12.1025	1232	0	0	0
920	.002487	12.1025	1232	0	0	0
925	.002487	12.1025	1232	0	0	0
930	.002487	12.1025	1232	0	0	0
935	.002487	12.1025	1232	0	0	0
940	.002487	12.1025	1232	0	0	0
945	.002487	12.1025	1232	0	0	0
950	.002487	12.1025	1232	0	0	0
955	.002487	12.1025	1232	0	0	0
960	.002487	12.1025	1232	0	0	0
965	.002487	12.1025	1232	0	0	0
970	.002487	12.1025	1232	0	0	0
975	.002487	12.1025	1232	0	0	0
980	.002487	12.1025	1232	0	0	0
985	.002487	12.1025	1232	0	0	0
990	.002487	12.1025	1232	0	0	0
995	.002487	12.1025	1232	0	0	0
1000	.002487	12.1025	1232	0	0	0
1005	.002487	12.1025	1232	0	0	0
1010	.002487	12.1025	1232	0	0	0
1015	.002487	12.1025	1232	0	0	0
1020	.002487	12.1025	1232	0	0	0
1025	.002487	12.1025	1232	0	0	0
1030	.002487	12.1025	1232	0	0	0
1035	.002487	12.1025	1232	0	0	0
1040	.002487	12.1025	1232	0	0	0
1045	.002487	12.1025	1232	0	0	0
1050	.002487	12.1025	123			

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION ANGLE (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER WORK (Joules)	FUEL IN CYLINDER (FRACTION)	CUMULATIVE FUEL (FRACTION)
180	.012487	10.1325	1090	0	0	0
175	.0125035	10.0229	1204.35	10.457	0	0
170	.0125325	9.78588	1274.87	100.45	0	0
165	.0125722	9.32221	1331.84	527.01	0	0
160	.0126224	8.67777	1374.51	872.21	0	0
FUEL INJECTION START AT 225 COMBUSTION COMMENCED						
155	.012683	8.12745	1401.43	1047.55	.071224	.071224
150	.0127543	7.61778	1416.87	1050.48	.127134	.127134
145	.0128362	7.1455	1424.2	1046.11	.182551	.258685
FUEL INJECTION STOP AT 215						
140	.0129292	6.7022	1424.25	1037.6	.23735	.496035
135	.0130333	6.27778	1418.15	1019.19	.290675	.78671
130	.0131484	5.87443	1408.53	991.11	.342373	1.12908
125	.0132742	5.4827	1395.64	953.6	.392555	1.52163
120	.0134115	5.10228	1379.8	907.44	.441238	1.96287
115	.0135602	4.73333	1361.14	853.44	.488435	2.4513
110	.0137203	4.37557	1339.8	791.53	.534168	2.98546
105	.0138919	4.02934	1316.47	721.86	.578452	3.56391
100	.0140753	3.69477	1291.19	645.33	.621306	4.18521
95	.0142705	3.37185	1264.1	562.7	.662752	4.84796
90	.0144775	3.06057	1235.89	474.6	.702899	5.55085
85	.0146963	2.76085	1206.44	381.4	.741754	6.2926
80	.0149269	2.47277	1175.32	283.4	.779326	7.07192
75	.0151693	2.19639	1142.82	180.8	.815626	7.88754
70	.0154235	1.93184	1109.4	72.6	.850663	8.7382
65	.0156895	1.67938	1075.4	-38.4	.884446	9.62264
60	.0159673	1.43812	1041.19	-109.3	.916983	10.5406
55	.0162569	1.20816	1006.8	-229.8	.948383	11.492
50	.0165583	0.98959	972.4	-350.3	.978646	12.4706
45	.0168715	0.78242	938.0	-470.8	1.00777	13.4783
40	.0171965	0.58665	903.6	-591.3	1.03577	14.514
35	.0175333	0.40228	869.2	-711.8	1.06264	15.5766
30	.0178819	0.22931	834.8	-832.3	1.08838	16.6649
25	.0182423	0.06774	800.4	-952.8	1.11299	17.7778
20	.0186145	0.01757	766.0	-1073.3	1.13647	18.9143
15	.0189985	0.00000	731.6	-1193.8	1.15882	20.0731
10	.0193943	0.00000	697.2	-1314.3	1.18004	21.2531
5	.0198019	0.00000	662.8	-1434.8	1.20014	22.4532
0	.0202213	0.00000	628.4	-1555.3	1.21912	23.6723

EXHAUST VALVE OPEN - - CYCLE COMPLETE

COMBUSTION COMPLETED

IVEI = 4.05856 1445
 IVEI (4 STAGES) = 4.05856 1445
 IVEI (4 STAGES) = 4.05856 1445
 IVEI (4 STAGES) = 4.05856 1445

Figure 23

DIESEL ENGINE COMBUSTION CYCLE

RUN: CARMICHAEL ENGINE

INPUT DATA:

CYLINDER BORE = .3725 METERS
 STROKE = .3725 METERS
 CONNECTING ROD LENGTH = .745 METERS
 ENGINE SPEED = 850 RPM
 ENGINE COMPRESSION RATIO = 5
 AIR / FUEL RATIO = 30
 TRAPPED PRESSURE = 1.01325E+06 N/M²
 TRAPPED TEMPERATURE = 1090 DEG KELVIN
 RESIDUAL AIR FRACTION = .05
 FUEL SELECTED FOR THIS ANALYSIS = C8H18 (ISO OCTANE)
 WITH A LOWER HEATING VALUE = -4.2E+07 JOULES/KG
 STOICHIOMETRIC AIR / FUEL RATIO = 15.1151
 FUEL / AIR EQUIVALENCE (PHI) = .503836

COMPRESSION ANGLE (DEGREES)	CYLINDER VOLUME (M ³)	CYLINDER PRESSURE (BAR)	CYLINDER TEMPERATURE (DEG K)	CYLINDER WORK (JOULES)	FUEL IN STEP (FRACTION)	CUMULATIVE FUEL (FRACTION)
180	.0121487	10.1325	1090	0	0	0
185	.0121355	12.0222	1244.35	53.4157	0	0
190	.0120985	9.76825	1074.67	232.45	0	0
195	.0120329	9.35355	1251.34	521.821	0	0
200	.0119754	9.35717	1244.51	875.211	0	0
205	.0119255	9.35938	1065.23	1081.81	0	0
FUEL INJECTION START AT 210 COMPRESSION COMPLETED						
210	.0118819	9.43914	1035.54	1381.34	.0000000	.0000000
215	.0118384	9.17124	1252.65	1552.65	.0000001	.0000001
220	.0117942	9.35874	1325.4	3120.45	.017424	.017424
FUEL INJECTION STOP AT 222						
225	.01175	9.14225	1432.36	4213.37	.011576	.0289999
230	.0117054	8.75831	1481.47	5455.25	.0055514	.0345514
235	.0116532	8.17235	1472.45	6137.41	.0074033	.0419547
240	.0115976	7.57357	1487.81	7048.2	.0088251	.0507798
245	.0115385	6.95356	1453.33	8126.76	.0095545	.0603343
250	.0114757	6.45532	1434.7	9333.23	.0095536	.0708879
255	.0114099	5.97222	1410.43	10677.6	.0089124	.0828003
260	.0113423	5.48358	1385.99	12175.4	.0078173	.0956176
265	.0112738	4.95358	1355.81	13839.3	.006391	.1120086
270	.0112037	4.38123	1314.25	15674.5	.0048383	.130847
275	.0111318	3.75545	1261.22	17693.1	.0032537	.153101
280	.0110575	3.08555	1200.6	19904	.0017785	.170879
285	.0109805	2.38377	1131.39	23186.5	.0005518	.186391
290	.0109009	1.65397	1054.2	26662.6	.0000000	.196391
295	.0108185	9.2729	1049.47	28577.5	.0118257	.208216
300	.0107333	8.8553	1234.24	3063.7	.007762-23	.215978
305	.0106454	8.37374	1227.54	17329	8.15536E-23	.22474
310	.0105551	7.74326	1218.73	17765.1	8.93322E-23	.234073
315	.0104617	6.95445	1201.39	18175.8	5.85555E-23	.243968
320	.0103655	6.05555	1183.54	18541.6	4.31577E-23	.254421
325	.0102666	5.0579	1166.93	18853.1	4.22172E-23	.265438
330	.0101652	4.0571	1150.14	19111	3.38134E-23	.276921
335	.0100613	3.05731	1133.23	19317.5	2.71223E-23	.288863
340	.0099549	2.057245	1115.39	19467	2.1754E-23	.301163
345	.00984616	1.05734	1097.15	19553.8	1.67522E-23	.313815
350	.00973594	0.05744	1078.2	19582	1.24525E-23	.326817
355	.00962458	0.05747	1058.6	19556.6	8.7575E-24	.340162
360	.00951222	0.0573	1038.3	19473.9	5.22665E-24	.353858

EX-AUST VALVE OPEN -- CYCLE COMPLETE

IMEP = 4.60012 BAR
 35.22 /L (STEP 2) = 272.35 KJ/KG
 Compression Ratio = 5.00000-23
 Fuel Conversion Factor = 1.00000E-23
 Overall Efficiency = 0.1715

KJ/KG--R

Figure 24

Appendix A

Specifications of Test Remley Engine^{22}

Type of Engine	Four Stroke
Bore	4.0 inches
Stroke	2.5 inches
Cylinder Displacement	31.41 cubic inches
Connecting Rod Length	6.25 inches
Compression Ratio	14.3 : 1
Number of Compression Rings	2
Number of Oil Rings	1
Number of Inlet Valves	2
Number of Exhaust Valves	2
Valve Diameter	1.286 inches
Valve Lift	0.280 inches
Inlet Valve Timing open/close	15°BTDC/50°ABDC
Exhaust Valve Timing open/close	50°BBDC/15°ATDC
Diameter of Intake Manifold Pipe	2.00 inches
Diameter of Exhaust Manifold Pipe	1.60 inches

Data Collected from Test Run {22}

Engine Speed in RPM	1450
Inlet Pressure	13.5 inches Hg gage
Exhaust Pressure	13.4 inches Hg gage
Inlet Air Temperature	186° F
Air to Fuel Ratio	25.38
IMEP	88.1 psi
Start of Injection	12.5° BTDC
Ignition Delay	5.5°
Period of Fuel Injection	17.5°

Appendix B
Computer Model

The computer program is written in TRS-80 Model III Disk Basic and consists of a main program and nine subroutines. The program listing has numerous remarks statements inserted to make the algorithm and computer code easier to understand. Since the program takes a considerable length of time to run, it is recommended that the remark statements be deleted before running. Samples of output are presented in figures 15 to 24.

```

5 '*****
6 '*****      MAIN PROGRAM      *****
7 '*****
8 'This program is written in TRS-80 Model III Disk Basic.
9 'Remove all remarks spaces before running to speed up run time.
10 'Dimension arrays.
11 'Array U contains the thermodynamic polynomial coefficients.
12 'Array F(5) and FD(5) are used in subroutines for calculating
13 'Thermodynamic data (i.e. enthalpy, internal energy, and moles).
14 'Arrays A(5) and B(5) contain number of moles of the
15 'Five species at the beginning of step, A, and at
16 'The end of the step, B.
20 DIM U(5,5), F(5), FD(5), A(5), B(5)
25 'Define all variables starting with I & J as integers.
30 DEFINT I,J
35 'Input data is requested from the operator -- WATCH UNITS
40 INPUT"ENTER TODAY'S DATE";DATE$
50 INPUT"ENTER RUN NUMBER";NUMB$
60 INPUT"ENTER CYLINDER BORE IN METERS";D
70 INPUT"ENTER STROKE IN METERS";S
80 INPUT"ENTER CONNECTING ROD LENGTH IN METERS";L
90 INPUT"ENTER ENGINE SPEED IN RPM";RPM
100 INPUT"ENTER ENGINE COMPRESSION RATIO";CR
110 INPUT"ENTER AIR / FUEL RATIO";AFR
120 INPUT"ENTER PRESSURE AT START OF COMPRESSION IN N/M^2";P1
130 INPUT"ENTER TEMPERATURE AT START OF COMPRESSION IN DEG K";T1
140 INPUT"ENTER RESIDUAL GAS FRACTION";F
150 INPUT"ENTER CRANK ANGLE FOR INTAKE VALVE SHUT";ALPHA
160 INPUT"ENTER CRANK ANGLE FOR EXHAUST VALVE OPEN";AEVO
170 INPUT"ENTER CRANK ANGLE FOR FUEL INJECTION ";AIJECT

```

```

180 INPUT"ENTER PERIOD OF FUEL INJECTION (DEGREES)";IJECT
185 INPUT"ENTER CRANK ANGLE INCREMENTS FOR THIS RUN";ADELT
190 INPUT"SELECT FUEL: (1) FOR C8H18 (OCTANE) (2) FOR C3H8 (PROPANE)";NN
195 'Load in fuel data for selected fuel.
200 IF NN=1 THEN GOSUB 4000 ELSE GOSUB 4100
205 'Load in constants with subroutine 4200
210 GOSUB 4200
215 'Subroutine 5000 calculates cylinder volume and surface area.
220 GOSUB 5000
225 V1=V
227 'Calculate phi and number of moles of fuel based on perfect combustion
230 GOSUB 5100
235 'Print out input data.
240 GOSUB 5200
250 PRES=P1*PBAR
255 IF AIJECT=ALPHA THEN LPRINT,, "FUEL INJECTION START AT ";AIJECT;"COMBUSTION COMMENCED"
260 LPRINT,ALPHA,V1,PRES,T1,WRKT,DMF,KO
265 'Convert heat of reaction from J/Kg to J/Kgmole.
270 QVS=QVS*WF
275 'Calculate moles of all species at beginning of run.
280 A(1)=MOLE*CA*F 'Moles of Carbon dioxide
290 A(2)=MOLE*F*HA/2 'Moles of Water Vapor
300 A(3)=MOLE*SOX*(1-F)/PHI 'Moles of Oxygen
310 A(4)=3.76*A(3) 'Moles of Nitrogen
320 A(5)=0.0 'Moles of Fuel
330 FORII=1TO5
340 B(II)=A(II):X(II)=A(II)
350 NEXTII
355 'Y, I1, & I2 are values that are fed into subroutines 5500 & 6000
356 'These subroutines are used to calculate internal energy, enthalpy and moles.

```

```

357 'The temperatures are raised to powers in the polynomial expressions.
358 'The values of I1 & I2 tell the subroutines for what species to solve.
360 Y=TS:I1=1:I2=4
370 FOR I=I1 TO I2
380 GOSUB 5500
390 NEXT I
400 GOSUB 6000
405 'Calculate internal energy, E, at reference temperature, TS.
410 E1=RMOL*TS*F1
420 Y=T1
430 FOR I=I1 TO I2
440 GOSUB 5500
450 NEXT I
460 GOSUB 6000
470 M1=F3
475 'Calculate internal energy and Specific heat at temperature T1
480 E1=RMOL*T1*F1
490 C1V=RMOL*F2/F3
495 'Add crank angle interval to go to end of step
500 ALPHA=ALPHA+ADELT
505 'Calculate cylinder volume and area.
510 GOSUB 5000
520 V2=V
525 IF KO >= 1.0 GOTO 540
530 IF ALPHA >= AIJECT THEN GOTO 560
540 DMF=0.0
550 GOTO 590
560 KK=1
565 'If injection has occurred, then go to Combustion Subroutine.

```

```

570 GOSUB 6500
580 IF KK = 2 GOTO 600
585 'First approximation at temperature.
590 T2=T1*((V1/V2)^(RMOL/C1V))-(DMF*QVS*MOLES)/(C1V*M1)
595 'Calculate the internal energy after combustion at T5.
600 Y=TS:I2=4
610 FOR II=1 TO 5
620 X(II)=B(II)
630 NEXT II
640 FOR I=I1 TO I2
650 GOSUB 5500
660 NEXT I
670 GOSUB 6000
680 EES2=RMOL*TS*F1
685 'Calculate the internal energy & specific heat at T2.
690 Y=T2
700 FOR I=I1 TO I2
710 GOSUB 5500
720 NEXT I
730 GOSUB 6000
740 E2=RMOL*T2*F1
750 M2=F3
760 C2V=RMOL*F2/F3
765 'Calculate pressure at end of step - Ideal gas.
770 P2=(M2/M1)*(T2/T1)*(V1/V2)*P1
775 'Calculate heat transfer in subroutine 7000
780 GOSUB 7000
785 'Calculate work
790 DW=0.5*(P1+P2)*(V2-V1)
795 'Calculate error for Newton-Raphson iteration.

```

```

800 FE=(E2-EES2)-(E1-ES1)*DW-DQ*(DMF*MOLE*QVS)
810 EARER=FE/(M2*C2V)
815 'NRACC is the allowable error for Newton-Raphson Iteration.
820 IFABS(EARER)<NRACCGOTO860
830 T2=T2-EARER/2
835 'Recalculate energies and specific heats at "new" temperature.
840 IF ALPHA < AIJECT GOTO 690
850 KK=2:GOSUB 6600
855 GOTO 600
856 'Convert pressure to bars.
860 PRES=P2*PBAR
865 'Cumulative work
870 WRKT=WRKT+DW
875 'Cumulative heat transfer.
880 Q=Q+DQ
882 'Cumulative heat release.
885 KO=KO+DMF
890 LPRINT,ALPHA,V2,PRES,T2,WRKT,DMF,KO
892 IF Y2=10. GOTO 900
895 IF Z2=1 THEN LPRINT,,,"COMBUSTION COMPLETED" ELSE GOTO 900
896 Y2=10.
900 IF ALPHA = AEVO GOTO 2000
905 'Shift end of step data to beginning of next step.
910 P1=P2
920 V1=V2
930 T1=T2
940 E1=E2
950 ES1=EES2

```

```

960 C1V=C2V
970 M1=M2
975 PEP=PPEP
976 RACT=RRCT
980 FOR II=1 TO 5
990 A(II)=B(II)
1000 NEXT II
1010 GOTO 500
2000 LPRINT,"EXHAUST VALVE OPEN - - CYCLE COMPLETE"
2010 'Calculate power, IMEP, efficiency, and sfc.
2020 PWR=WRKT*RPM*1.2E-05
2030 MEP=WRKT*PBAR/VS
2040 EFFTH=100.0*WRKT/(-QVS*MOLE)
2050 SFC=(3.6E06*WF)/(-QVS*KO*EFFTH)
2060 LPRINT:LPRINT
2070 LPRINT TAB(20)"IMEP =" ;MEP;" BARS"
2080 LPRINT TAB(20)"POWER (4 STROKE) =" ;PWR;" KILOWATTS"
2090 LPRINT TAB(20)"SPECIFIC FUEL CONSUMPTION =" ;SFC;" KG/KW-HR"
2100 LPRINT TAB(20)"THERMAL EFFICIENCY =" ;EFFTH;" PERCENT"
2110 END

```

```

4000 '*****
4001 '***** FUEL DATA *****
4002 '*****
4010 FUEL$="C8H18 (ISO OCTANE)"
4015 'Polynomial coefficients for iso-octane
4020 U(5,1)=-0.71993
4030 U(5,2)=4.6426E-02
4040 U(5,3)=-1.68385E-05
4050 U(5,4)=-2.67009E-09
4060 U(5,5)=0.0
4070 CA=8:HA=18
4080 QVS=-4.2E07
4090 RETURN
4100 'Polynomial coefficients for propane.
4110 FUEL$="C3H8 (PROPANE)"
4120 U(5,1)=1.13711
4130 U(5,2)=1.45532E-02
4140 U(5,3)=-2.95876E-06
4150 U(5,4)=0.0
4160 U(5,5)=0.0
4170 CA=3:HA=8
4180 QVS=-4.63E07
4190 RETURN

```

'Carbon atoms = 8, Hydrogen atoms = 18
'Lower heating value in J/Kg.

'Carbon atoms = 3, Hydrogen atoms = 8.
'Lower heating value in J/Kg.

```

4200 '*****
4201 '***** Constants and other input data *****
4202 '*****
4208 'This subroutine loads various constants and
4209 'polynomial coefficients for CO2, H2O, N2 and O2.
4210 P0=101325
4220 TS=298
4230 PI=3.1415927
4240 RD=180/PI
4250 RHOL=8314.3
4260 WRKT=0.0:Q=0.0
4270 PBAR=1E-05
4271 K1=0.014
4272 K2=2/3
4273 K3=6.5E11
4274 K4=1.5E4
4275 NRACC=1.0
4276 G1=0.26:G2=0.75:G3=3.88E-08 'Annand equation coefficients a,b,&c.
4277 TW=750:PR=0.7 'Wall temperature (assumed) and Prandtl Number.
4278 M(1)=24E-06:M(2)=20E-06:M(3)=32E-06:M(4)=29E-06 'viscosity of species.
4280 FOR II=1 TO 5
4290 A(II)=0.0:B(II)=0.0
4300 NEXT II
4310 'Thermodynamic data preparation U(I,J)
4320 'I=Species J=Coefficient
4330 'Species: 1=CO2; 2=H2O; 3=O2; 4=N2; 5=FUEL
4350 'Carbon Dioxide
4360 U(1,1)=3.0959
4370 U(1,2)=2.73114E-03
4380 U(1,3)=-7.88542E-07

```

```

4390 U(1,4)=8.66002E-11
4400 U(1,5)=0.0
4430 'Water Vapor
4440 U(2,1)=3.74292
4450 U(2,2)=5.65590E-04
4460 U(2,3)=4.95240E-08
4470 U(2,4)=-1.81802E-11
4480 U(2,5)=0.0
4510 'Oxygen
4520 U(3,1)=3.25304
4530 U(3,2)=6.52350E-04
4540 U(3,3)=-1.49524E-07
4550 U(3,4)=1.53897E-11
4560 U(3,5)=0.0
4590 'Nitrogen
4600 U(4,1)=3.34435
4610 U(4,2)=2.94260E-04
4620 U(4,3)=1.95300E-09
4630 U(4,4)=-6.57470E-12
4640 U(4,5)=0.0
4700 'Volume of cylinder at BDC
4710 VS=PI*S*(D/2.0)^2
4715 'Volume at TDC.
4720 VC=VS/(CR-1)
4730 N=L/(S/2)
4735 'Total cylinder volume.
4740 VT=VS+VC
4745 'Areas in cylinder.
4750 AC=4*VC/D
4760 AS=S*PI*D
4770 AT=AS+AC
4780 RETURN

```

```

5000 *****
5001 ***** VOLUME & AREA OF CYLINDER *****
5002 *****
5010 SWEEP=(1+N-(N+2.0-(SIN(ALPHA/RD)))+2.0)+0.5-COS(ALPHA/RD))
5020 V=VT-(VS/2)*SWEEP
5030 AREA=AT-(AS/2)*SWEEP
5040 RETURN

```

```

5100 '*****
5101 '***** FUEL CALCULATIONS *****
5102 '*****
5105 'Calculate Number moles of fuel.
5110 SOX=CA+HA/4
5120 WF=12.0*CA+HA
5125 'Calculate air fuel ratio - stoichiometric.
5130 ASTF=4.76*SOX*28.96/WF
5140 PHI=ASTF/AFR
5145 'Calculate mole of fuel for perfect combustion.
5150 MOLE=P1*V1*PHI/(4.76*SOX*RMOL*T1)
5160 RETURN

```

```

5200 '*****
5201 '***** PRINT SUBROUTINE *****
5202 '*****
5205 LPRINT CHR$(27);"6":LPRINT CHR$(27);CHR$(49);CHR$(30)
5210 LPRINT:LPRINTTAB(25)"DIESEL ENGINE COMBUSTION CYCLE":LPRINT
5220 LPRINT TAB(25);"RUN: ";NUMB$;" ";DATE$
5230 LPRINT TAB(10)"INPUT DATA:"
5240 LPRINT TAB(20)"CYLINDER BORE = ";D;"METERS"
5250 LPRINT TAB(20)"STROKE = ";S;"METERS"
5260 LPRINT TAB(20)"CONNECTING ROD LENGTH = ";L;"METERS"
5270 LPRINT TAB(20)"ENGINE SPEED = ";RPM;"RPM"
5280 LPRINT TAB(20)"ENGINE COMPRESSION RATIO = ";CR
5290 LPRINT TAB(20)"AIR / FUEL RATIO = ";AFR
5300 LPRINT TAB(20)"TRAPPED PRESSURE = ";P1;"N/M^2"
5310 LPRINT TAB(20)"TRAPPED TEMPERATURE = ";T1;"DEG KELVIN"
5320 LPRINT TAB(20)"RESIDUAL AIR FRACTION = ";F
5330 LPRINT TAB(20)"FUEL SELECTED FOR THIS ANALYSIS = ";FUELS
5340 LPRINT TAB(20)" WITH A LOWER HEATING VALUE = ";QVS;"JOULES/KG"
5350 LPRINT TAB(15)"STOICHIOMETRIC AIR / FUEL RATIO = ";ASTF
5360 LPRINT TAB(15)"FUEL / AIR EQUIVALENCE (PHI) = ";PHI
5400 LPRINT CHR$(27);CHR$(48);CHR$(29)
5405 LPRINT CHR$(27);"8"
5410 LPRINT,"COMPRESSION"," CYLINDER"," CYLINDER"," CYLINDER"," FUEL"," CUMULATIVE"
5420 LPRINT," ANGLE"," VOLUME"," PRESSURE","TEMPERATURE"," WORK"," IN STEP"," FUEL"
5430 LPRINT," (DEGREES)"," (M^3)"," (BAR)"," (DEG K)"," (JOULES)","(FRACTION)","(FRACTION)"
5440 LPRINT,"-----","-----","-----","-----","-----","-----"
5450 RETURN

```

```

5500 '***** THERMODYNAMIC PROPERTIES OF MIXTURES *****
5505 '***** THERMODYNAMIC PROPERTIES OF MIXTURES *****
5510 '***** THERMODYNAMIC PROPERTIES OF MIXTURES *****
5520 F=0.0
5530 FD=0.0
5550 FOR J=1 TO 5
5560 LET Z=J
5570 LET L=J-1
5580 F=F+U(I,J)*Y+(Z-1.0)
5600 FD=FD+Z*U(I,J)*Y+(Z-1.0)
5620 NEXT J
5625 F(I)=F
5626 FD(I)=FD
5630 RETURN

```

```

6000 '***** THERMODYNAMIC PROPERTIES OF MIXTURES *****
6005 '***** THERMODYNAMIC PROPERTIES OF MIXTURES *****
6006 '***** THERMODYNAMIC PROPERTIES OF MIXTURES *****
6010 F1=0.0
6020 F2=0.0
6030 F3=0.0
6040 FOR I=11 TO 12
6050 F1=F1+X(I)*(F(I)-1.0)
6070 F2=F2+X(I)*(FD(I)-1.0)
6090 F3=F3+X(I)
6100 NEXT I
6120 RETURN

```

```

6500 '***** COMBUSTION SUBROUTINE *****
6501 '***** SUBROUTINE *****
6502 '*****
6506 IF ALPHA = AIJECT LPRINT,, "FUEL INJECTION START AT ";AIJECT,"COMBUSTION COMMENCED"
6507 IF ALPHA = (AIJECT+IJECT+ADELT) LPRINT,, "FUEL INJECTION STOP AT ";ALPHA-ADELT
6508 IF KO >= 1.0 GOTO 540
6510 FOR II=1 TO 5
6515 X(II)=A(II)
6520 NEXT II
6540 'Variable MIJECT is the total fuel injected to this point.
6545 IF MIJECT = (MOLE*WF) THEN GOTO 6600
6550 MIJECT = MIJECT+MOLE*WF+ADELT/IJECT
6590 'Calculate Partial Pressure of Oxygen
6600 PO2=P2*PBAR/A(3)/M1
6605 'Calculate the fuel that has been prepared in this step.
6610 MASUNB=MIJECT-PEP
6615 Z1=MIJECT*(1-K2)
6616 Z2=MASUNB+K2
6617 Z3=PO2*0.4
6620 PN1=K1*Z1*Z2*Z3
6625 'Calculate the cumulative fuel Prepared kg.
6630 PPEP=PEP+(PN1*ADELT)
6635 'Check to see if reaction rate less than preparation
6640 IF PPEP <= RACT GOTO 6690
6650 COEF=K3*PO2/(RPM*SQR(TM))
6660 R1N=COEF*(PPEP-RACT)*EXP(-K4/TM)
6665 'Calculate cumulative fuel reacted kg.
6670 RRCT=RACT+(R1N*ADELT)
6680 IF RRCT < PPEP THEN DF=R1N*ADELT ELSE DF=PN1*ADELT:GOTO6691

```

```

6690 DF=PN1*ADELT
6691 DMF=DF/(WF*MOLE)
6692 IF (KO+DMF)>1.0 THEN DMF=(1.0-KO)
6693 IF (KO+DMF)=1.0 THEN Z2=1
6700 'Calculate the amount of fuel burned in this step.
6701 A(5)=DMF*MOLE:Y=TS:I2=5
6702 FOR I=1 TO I2:GOSUB 5500:NEXT I:GOSUB 6000
6703 ESI=RMOL*TS:F1=Y:T1
6704 FOR I=1 TO I2:GOSUB 5500:NEXT I:GOSUB 6000
6705 M1=F3-A(5)
6706 E1=RMOL*T1:F1
6707 C1V=RMOL*F2/F3
6709 'Calculate moles of products after combustion
6710 B(1)=A(1)+(DMF*MOLE*CA)
6720 B(2)=A(2)+(DMF*MOLE*HA/2)
6730 B(3)=A(3)-(DMF*MOLE*SOX)
6740 B(4)=A(4)
6750 B(5)=0.0
6760 RETURN

```

```

7000 '*****
7010 '***** HEAT TRANSFER-ANNAND EQUATION *****
7020 '*****
7055 'Calculate piston speed
7060 VP=2*S*RPM/60
7065 'Calculate mean temperature
7070 TM=(T1+T2)/2
7110 'Calculate the mixture viscosity from the individual specie's viscosity.
7120 MU=X(1)*M(1)+X(2)*M(2)+X(3)*M(3)+X(4)*M(4)
7125 'Calculate Specific Heat Cp
7130 CP=C2V+RNOL/M2
7135 'Calculate Conductivity
7140 K=CP*MU/PR
7145 'Calculate density
7150 RO=P2*M2/(RNOL*T2)
7155 'Calculate Reynold's Number
7160 RE=RO*D*VP/MU
7165 'Convective Term from Annand's Equation
7170 CVECT=G1*K*(RE+G2)*(TM-TW)/D
7175 'Radiation Term from Annand's Equation
7180 CRAD=G3*(TM+4.0-TW+4.0)
7190 IF ALPHA < AIJECT THEN QDT=CVECT ELSE QDT=CVECT+CRAD
7195 'Calculate heat loss this iteration
7200 DQ=AREA*QDT*ADELTA/(6*RPM)
7210 RETURN

```

END

FILMED

1-4-64