


AD-A147 306


SAFETY EVALUATION OF AN ELECTRONIC TOTALIZER CONTAINING 1/1
A LI/CFX CELL(U) NAVAL SURFACE WEAPONS CENTER SILVER
SPRING MD P B DAVIS ET AL. 01 NOV 83 NSWC/TR-83-508

UNCLASSIFIED

F/G 10/3

NL

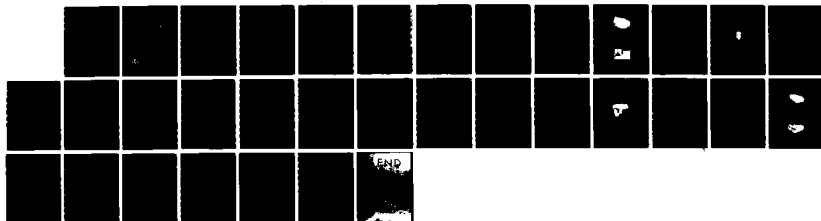



NSWC TR 83-508

(12)

SAFETY EVALUATION OF AN ELECTRONIC TOTALIZER CONTAINING A $\text{Li}/(\text{CF})_x$ CELL


BY P.B. DAVIS, R.F. BIS, J.A. BARNES,
S. E. BUCHHOLZ, F. C. DEBOLD, L. A. KOWALCHIK

RESEARCH AND TECHNOLOGY DEPARTMENT

1 NOVEMBER 1983

Approved for public release, distribution unlimited.

DTIC
SELECTED
NOV 9 1984
A



NAVAL SURFACE WEAPONS CENTER

Dahlgren, Virginia 22448 • Silver Spring, Maryland 20910

84 11 05 091

AD-A147 306

DTIC FILE COPY

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NSWC TR 83-508	2. GOVT ACCESSION NO. A147306	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SAFETY EVALUATION OF AN ELECTRONIC TOTALIZER CONTAINING A Li/(CF)x CELL		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) P. B. Davis, J. A. Barnes, R. F. Bis, S. E. Buchholz, F. C. DeBold, L. A. Kowalchik		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Surface Weapons Center (Code R33) White Oak Silver Spring, MD 20910		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE 1 November 1983
		13. NUMBER OF PAGES 33
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release, distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Lithium Battery Safety forced discharge Li/(CF)x Battery charging Electronic Totalizer Poly-carbonmonofluoride short circuit heating		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A safety review and test program has been conducted on the Electronic Totalizer Model 799806-212 manufactured by Veeder-Root containing the Panasonic Lithium Polycarbonmonofluoride battery (one cell) BR-2/3A. The cell is used for the LCD display of the totalizer. Tests were conducted on the cell both inside the totalizer and alone. Tests included short circuit, forced discharge into voltage reversal, charging,		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-5501

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

7 heat tape, and gas sample collection of combustion products. The tests were run on both fresh cells and partially discharged cells. The forced discharge and charging tests were conducted at both the 250mA and 1 amp level.

No fire or flame was noted during the tests with the exception of the heat tape runs. During heat tape tests fire was noted at 450°C.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

FOREWORD

Lithium Poly-Carbonmonofluoride (Li/(CF)_x) batteries are used to provide power for the Veeder-Root Electronic Totalizer. This report presents results of a test program to determine if the system is safe for land-base use and to characterize the overall safety of the Li/(CF)_x cell. The work presented in this report was sponsored by NAVELEX HQ Code PDE 110-142.

Approved by:

J. R. Dixon
 JACK R. DIXON, Head
 Materials Division



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

CONTENTS

<u>Chapter</u>		<u>Page</u>
1	INTRODUCTION.....	1
2	EXPERIMENTAL.....	5
3	RESULTS AND DISCUSSION.....	9

ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	PHOTOGRAPH OF ELECTRONIC TOTALIZER.....	2
2	PHOTOGRAPH OF INTERNAL LAYOUT OF ELECTRONIC TOTALIZER.....	2
3	CROSS SECTIONAL VIEW OF BR-2/3A BATTERY.....	3
4	PHOTOGRAPH OF PANASONIC BR-2/3A CELL.....	4
5	SCHEMATIC OF FORCED DISCHARGE CIRCUIT.....	6
6	SCHEMATIC OF CHARGING TEST CIRCUIT.....	6
7	SHORT CIRCUIT OF FRESH BR-2/3A CELL IN ELECTRONIC TOTALIZER	10
8	FORCED DISCHARGE INTO VOLTAGE REVERSAL ON BR-2/3A CELL (250 mA).....	12
9	FORCED DISCHARGE INTO VOLTAGE REVERSAL ON BR-2/3A CELL (1 AMP)	13
10	250 mA CHARGING TEST ON FRESH BR-2/3A CELL.....	15
11	1 AMP CHARGING TEST ON FRESH BR-2/3A CELL.....	16
12	PHOTOGRAPH OF TWO CELLS AFTER CHARGING.....	17
13	HEATING TEST ON BR-2/3A CELL TEST	19
14	TOTALIZER AFTER HEATING TEST FIRE.....	20
15	HEAT TEST OF TOTALIZER WITH NO CELL.....	20

TABLES

<u>Table</u>		<u>Page</u>
1	SUMMARY OF SHORT CIRCUIT TESTS	11
2	SUMMARY OF FORCED DISCHARGE/VOLTAGE REVERSAL TESTS	14
3	GAS ANALYSIS OF COMBUSTION PRODUCTS AFTER CELL HEATING....	21

CHAPTER 1

INTRODUCTION

A technical evaluation and safety review has been conducted on the Mini LX Totalizer containing a Panasonic BR-2/3A single cell. The purpose of this report is to describe the results of this test program requested by the Naval Electronics Systems Command (as required by Reference 1). The results of some additional tests designed to further characterize the safety of the BR-2/3A cell are also presented. All tests were conducted by the Naval Surface Weapons Center. The tests were conducted to determine if the unit (Electronic Totalizer) was safe to handle, ship, and deploy as configured and to gain general insight into the overall safety of the BR-2/3A single cell.

The Mini LX Electronic Totalizer is made by Veeder-Root of Hartford, Connecticut and is shown in Figure 1. It is to be used in land-based communications to count an impulse generated downline. It is a commercially-available product with a projected LCD life of five years and a projected battery life of ten years. An overhead view of the Totalizer's internal layout is presented in Figure 2. The Panasonic BR-2/3A Li/(CF)x cell is manufactured by Matsushita Electric of Japan. The Panasonic cell is a Lithium anode, poly-carbonmonofluoride cathode cell with a "jelly roll" cylindrical construction, and is depicted in Figure 3. A photograph of the cell is shown in Figure 4. It has an Open Circuit Voltage of approximately 3.2V, a capacity of 1.2Ah and is designed to be used at a $< 5\text{mA}$ level.² It has a non-aqueous, non-toxic organic electrolyte.²

Abuse conditions were generated by:

- 1) short circuiting of the cell;
- 2) forced discharge of the cell into voltage reversal with an external D.C. constant current power supply. The tests were conducted at two different discharge rates;
- 3) heating of the cell to 500°C at rates ranging from $20^{\circ}\text{C}/\text{MIN}$ to $50^{\circ}\text{C}/\text{MIN}$;
- 4) charging of fresh and partially-discharged cells with an external D.C. constant current power supply. The tests were conducted at two different charge rates;
- 5) analysis of gas samples taken from the products of cell incinerations. Incineration was conducted in oxygen, air, and helium atmospheres.

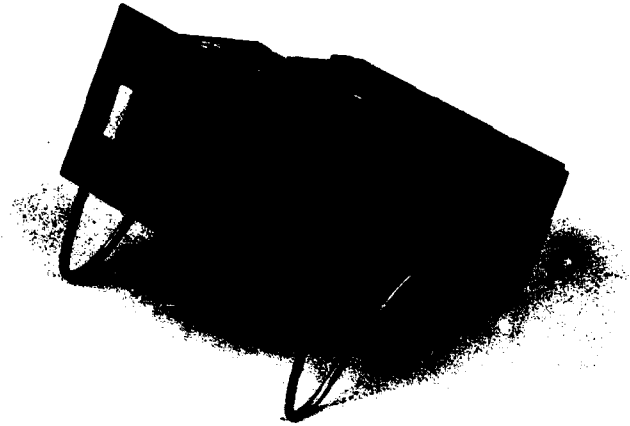


FIGURE 1. PHOTOGRAPH OF ELECTRONIC TOTALIZER

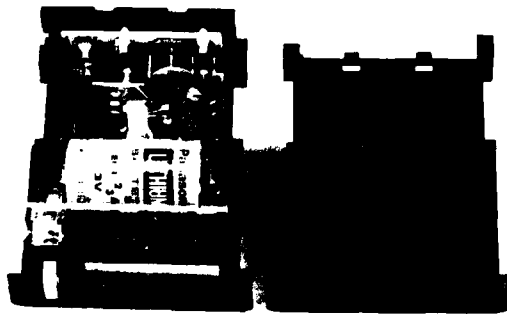


FIGURE 2. PHOTOGRAPH OF INTERNAL LAYOUT OF ELECTRONIC TOTALIZER

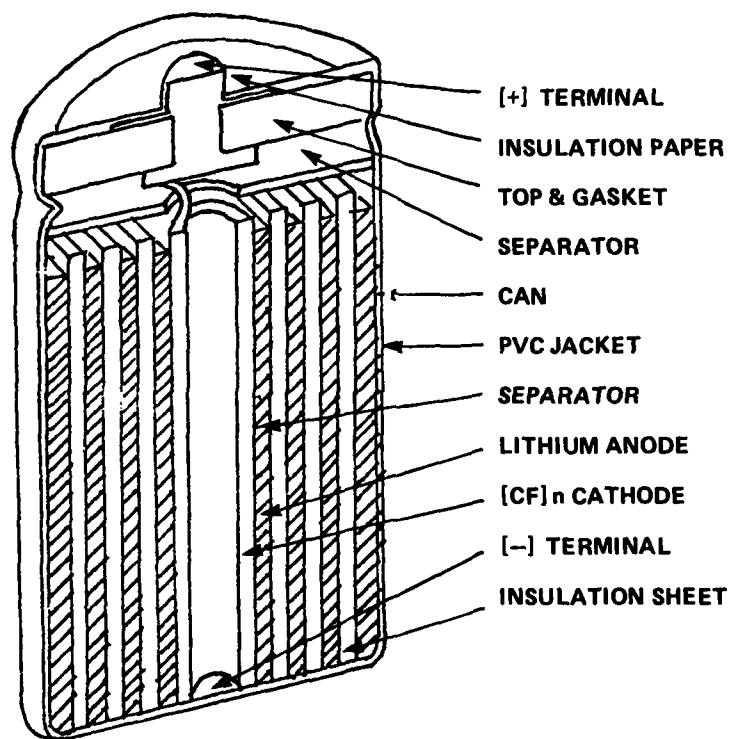


FIGURE 3. CROSS SECTIONAL VIEW OF BR-2/3A BATTERY



FIGURE 4. PHOTOGRAPH OF PANASONIC BR-2/3A CELL

CHAPTER 2

EXPERIMENTAL

The experimental program was conducted as follows:

1) The cell was short-circuited inside the Totalizer with voltage, current, and temperature monitored throughout the run. The test was repeated on the cell alone (total of two tests).

2) Forced discharges of the cell were conducted with a constant current D.C. power supply and were run at both the 250mA and 1 AMP current level (two tests at each rate). At each current rate, one test was run in the Totalizer and one on the cell alone. Current, voltage, and temperature were monitored during all runs. Figure 5 illustrates the circuit used for the tests.

3) Nine heating tests were conducted to 500°C with the heating rates varied from 20°C/MIN to 50°C/MIN. Six tests were run with fresh cells, three inside the Totalizer, and three on cells only. One of the cells was heated to only 300°C. Two tests were run with "dead" cells, one of which was a cell that had undergone forced discharge in a previous test and was only heated to about 300°C. The other was a cell that had been short circuited and was heated in the totalizer to 500°C. The final heating test was conducted only on the Totalizer with no cell.

All heating tests were conducted with Thermolyne heat tape and required the cutting away of about 1/8" circuit board within the Totalizer to accomodate enough room for the heat tape. Battery voltage, temperature, and Totalizer temperature were monitored during runs.

4) Six charging tests were conducted using a constant current D.C. power supply. Four tests were conducted on fresh BR-2/3A cells, with two of the four tests conducted at a 1 AMP charging rate, and the other two runs charged at a 250mA rate. The final two charging tests were conducted on partially discharged cells, with one charged at 250mA and the other at 1 AMP. The partially discharged cells were obtained by discharging at constant current until at least 50% of the capacity was removed. They were discharged and charged at the same current.

None of the charging tests were conducted with the cell in the Totalizer as charging could not take place in the Totalizer. Fresh cells were charged to at least 100% of the cell capacity. Partially discharged cells were charged to full capacity, and then continued to at least an additional 100% of cell capacity. Figure 6 depicts the circuit used for the charging tests.

5) Gas samples were taken and analyzed of all gas products generated by

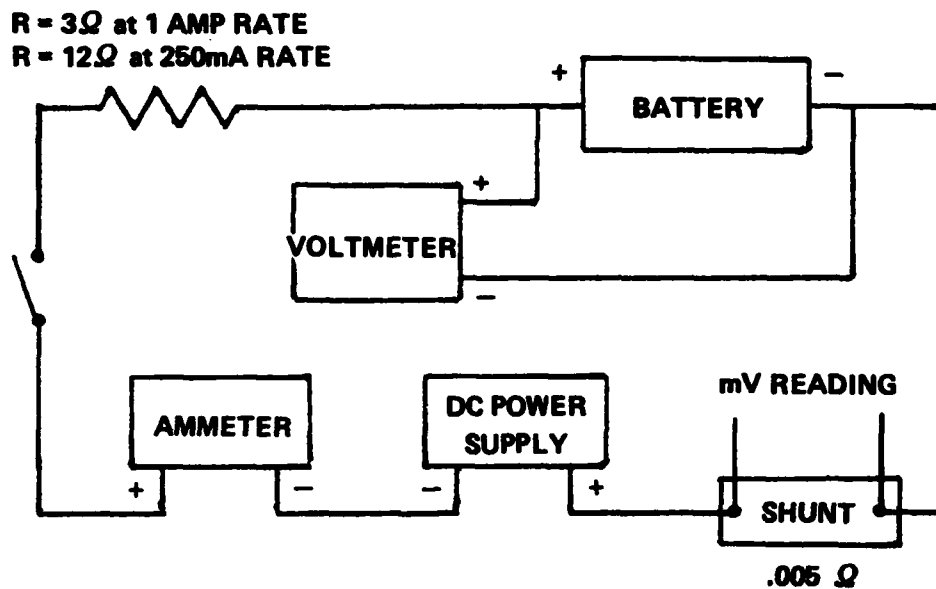


FIGURE 5. SCHEMATIC OF FORCED DISCHARGE CIRCUIT

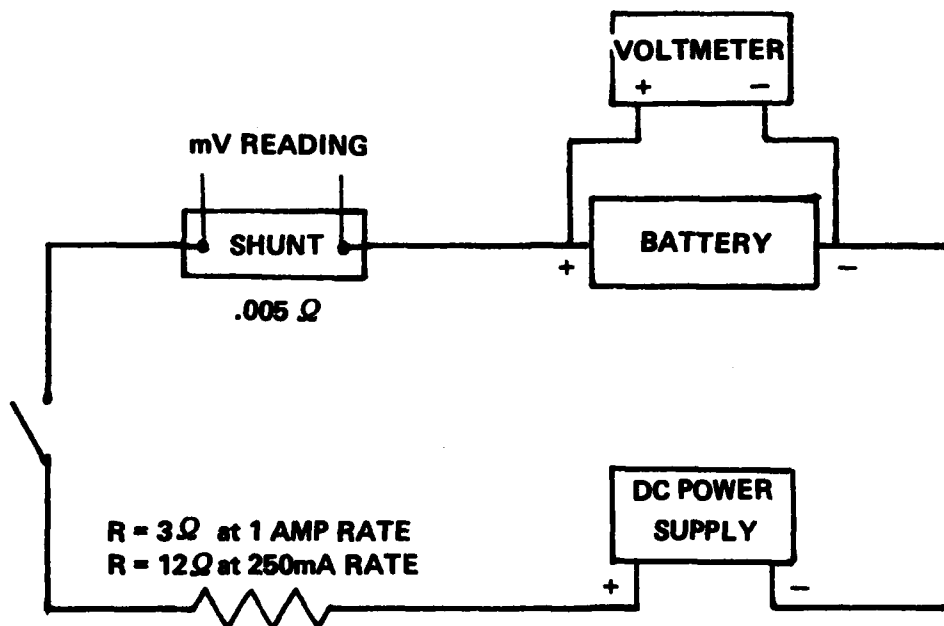


FIGURE 6. SCHEMATIC OF CHARGING TEST CIRCUIT

heating. The cells were placed in a pressure vessel in atmospheres of oxygen, helium, and air at a slight positive pressure (< 5 p.s.i.g). Samples were then heated with heat tape until combustion commenced (approximately 450°C). Then gas samples of the combustion products were taken from the pressure vessel. Voltage, temperature, and internal pressure of the vessel were monitored. The samples were sent to the National Bureau of Standards for analysis.³

Temperatures in all of the tests were monitored with type K thermocouples. All reported cell temperatures are cell skin temperatures. The D.C. Power supply used in the tests was a LH 121 made by Lambda Electronics Corporation. The pressure transducer used was a PSI-Tronix model PS1100-250-G1, and had been calibrated for values between 0-150 p.s.i.g.

All tests conducted within the Totalizer required two small modifications of the Totalizer unit to allow data acquisition, but in no way affected the outcome of the tests. The modifications consisted of 1) drilling a small hole on the top of the unit to allow thermocouples and heat tape leads into the Totalizer; 2) soldering of leads from the battery terminals to existing posts leaving the rear of the unit. This was done to facilitate the charging and forced discharge tests and the taking of voltage readings.

CHAPTER 3

RESULTS AND DISCUSSION

Both short circuit tests yielded similar results, and the results of a typical short circuit test is presented in Figure 7. A summary of significant data from both short circuit tests is listed in Table 1. The maximum temperature obtained in both cases was slightly over 130°C, and ventings did not occur. The cell shut itself down in both cases at about two minutes. Cell shutdown occurs when the internal temperature reaches near 130°C and the polypropylene mesh separator apparently fuses. Several weeks after the tests the cells were re-examined and minor leakage was noticed. This was probably due to warpage caused by softening of the plastic top and gasket (one piece) during the high temperatures of the tests. In addition, some minor cracking of the plastic PVC can jacket was noted.

Figures 8 and 9 present the voltage, current and temperature data from the forced discharge tests. Table 2 summarizes the data obtained from all four forced discharge tests. Cells were held in voltage reversal for 100% of cell capacity. Maximum temperature for the 250mA tests was 43°C, and for the 1 AMP tests it was 84°C. No damage to the cell was noticed in any case, and subsequent checks weeks after the tests revealed no cell leakage. As shown in Figure 9, the power supply voltage was turned up at 62 minutes. This was done because the voltage on the constant current power supply had originally been limited to slightly above the cell voltage. When it was apparent that the power supply voltage was limiting the current level during cell voltage reversal, the power supply voltage was increased.

Figures 10 and 11 present the results of the 250mA and 1 AMP charging tests. During both tests "pops" from the cell were heard, and significant smoking occurred. Ventings did occur; and in one test, the top insulation paper was partially pushed out the top during the venting. A photograph of two ventings is presented in Figure 12. Ventings consisted of the pushing of the plastic cap from its seating to allow the release of internal pressure, but in general did not involve fire or flame. However, in one instance at approximately 50 min. into a 1 AMP charging test, a minor and brief fire erupted from the end cap where the cell had vented earlier in the test. This incident occurred on a cell that had been discharged to one half capacity at 1 AMP before commencing charging. No other such incident was noted during any of the charging tests. As can be seen by comparing the data curves, the 1 AMP rate produced much more erratic behavior than did the 250mA rate. In both cases, when the amperage fell from the specified charging rate, the voltage rose to 20 volts. This is due to a power supply limiting voltage of 20. In all cases the PVC outer can jacket was cracked and discolored, but in no test was the steel can affected.

As previously described, a variety of heat tape tests were conducted.

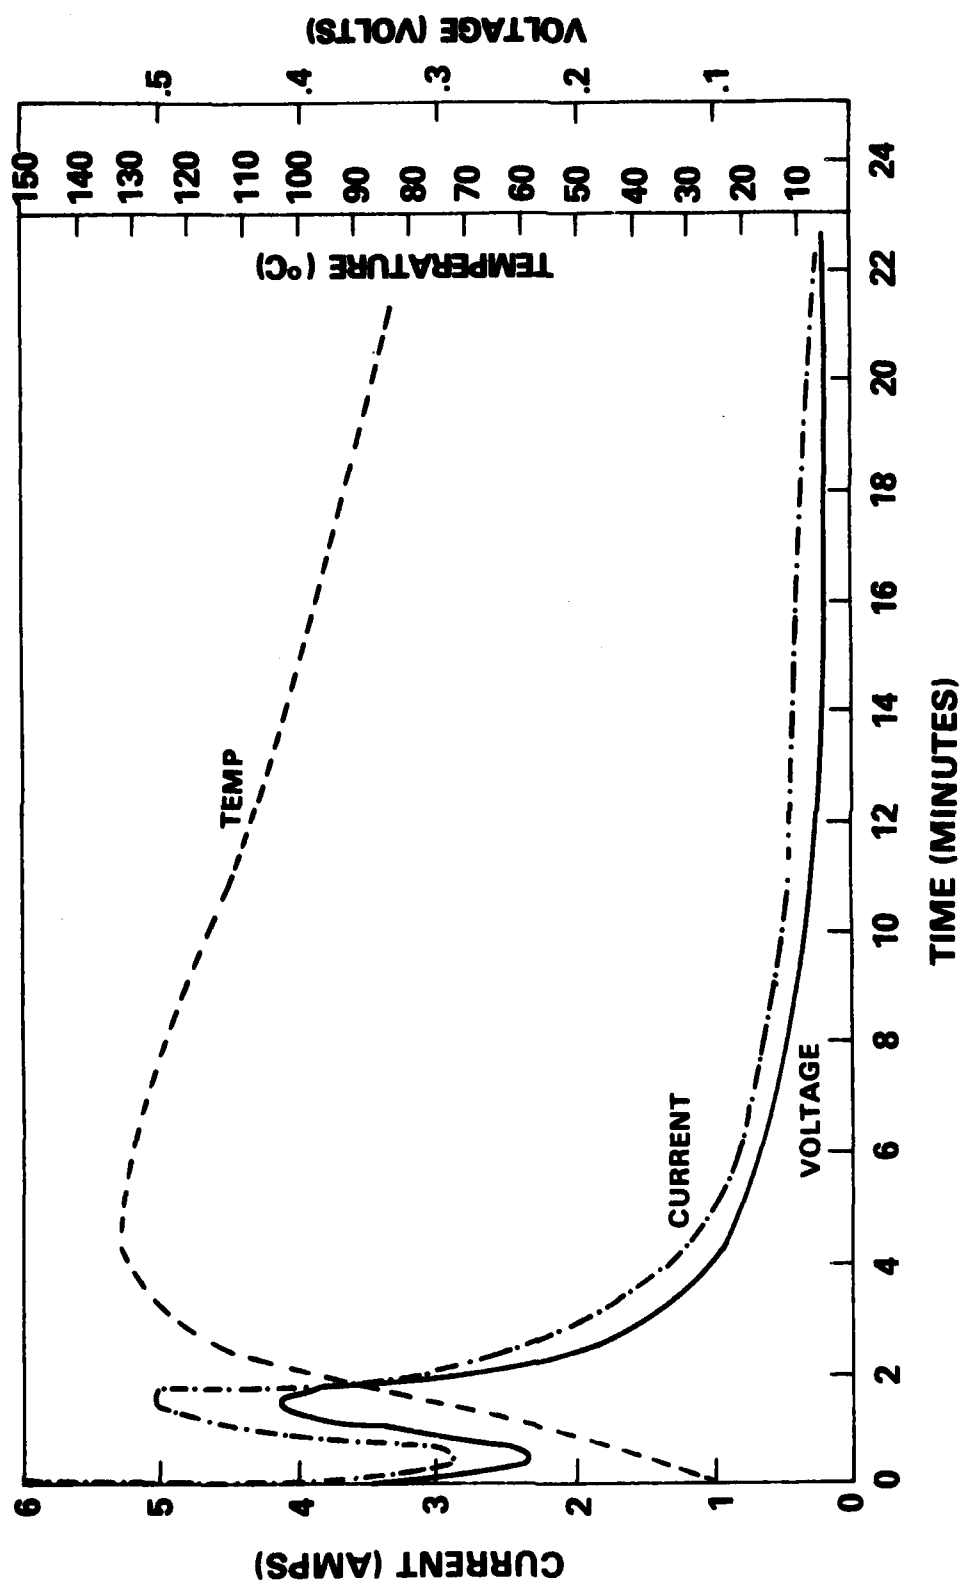


FIGURE 7. SHORT CIRCUIT OF FRESH BR-2/3A CELL IN ELECTRONIC TOTALIZER

TABLE 1. SUMMARY OF SHORT CIRCUIT TESTS

	TEST 1	TEST 2
MAXIMUM TEMPERATURE	134°C	132°C
TIME TO REACH MAXIMUM TEMPERATURE	4.8 MIN	4.7 MIN
PEAK AMPERAGE	5.8 A	5.9 A
BATTERY SHUTDOWN TIME	1.9 MIN	2.0 MIN
BATTERY APPEARANCE	NO CHANGE	
LONG RANGE APPEARANCE	MINOR TO MODERATE LEAKAGE	

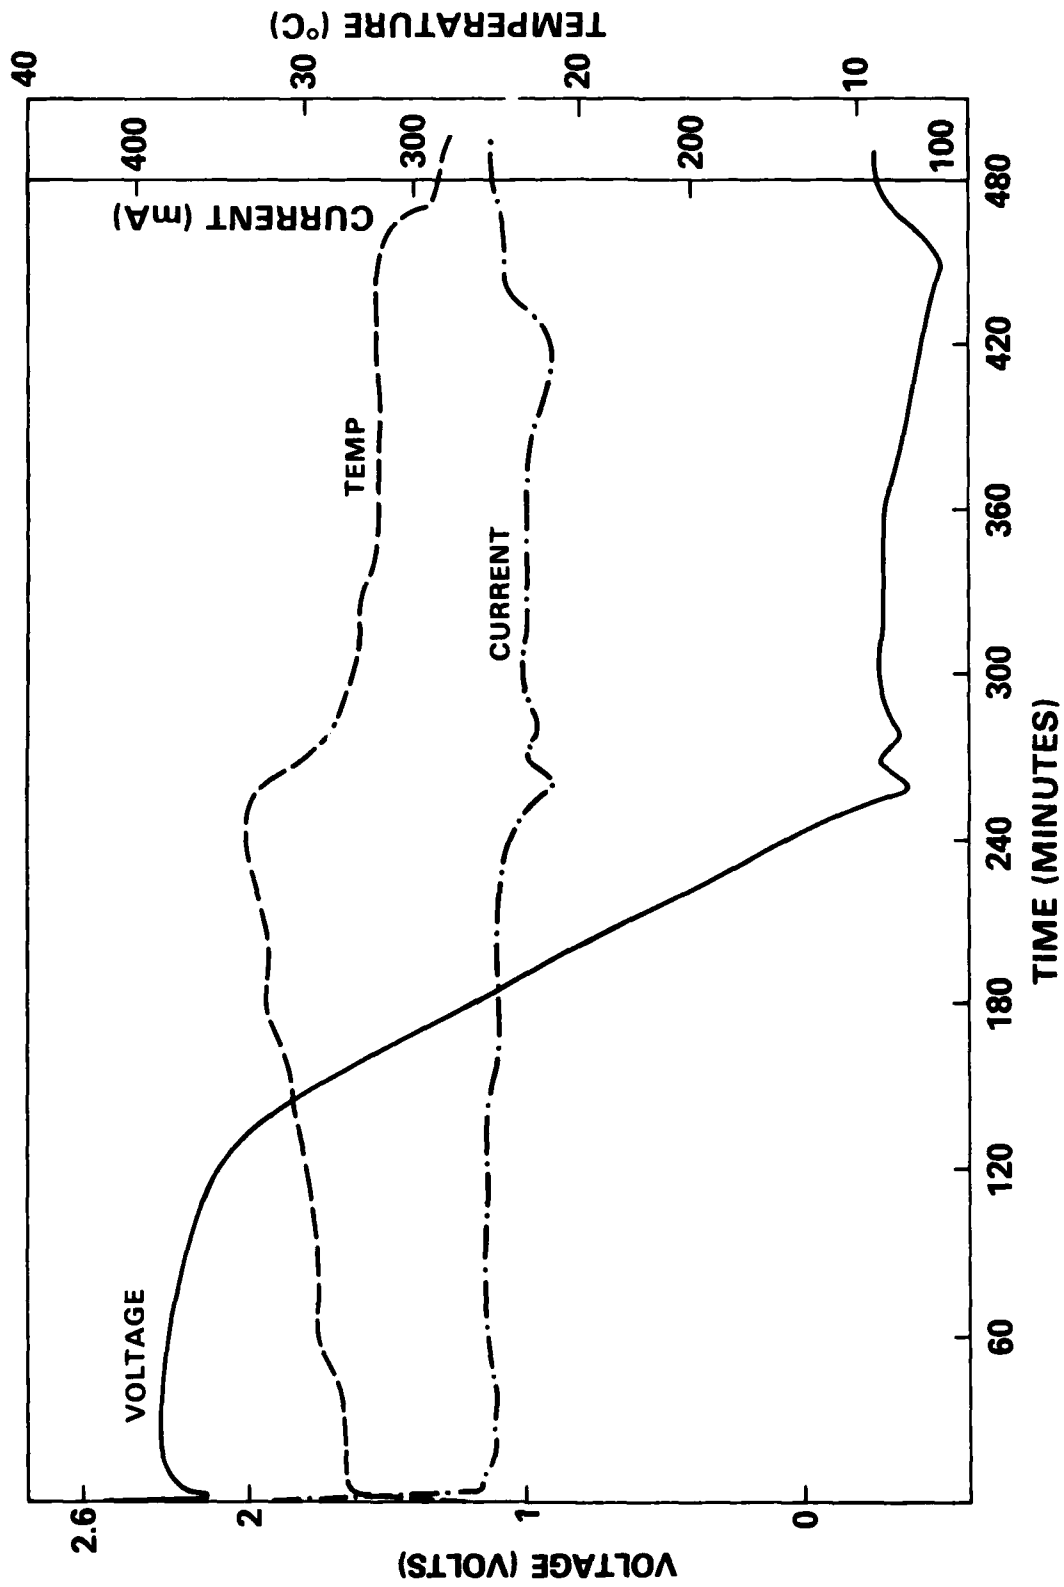


FIGURE 8. FORCED DISCHARGE INTO VOLTAGE REVERSAL ON BR-2/3A CELL (250 mA)

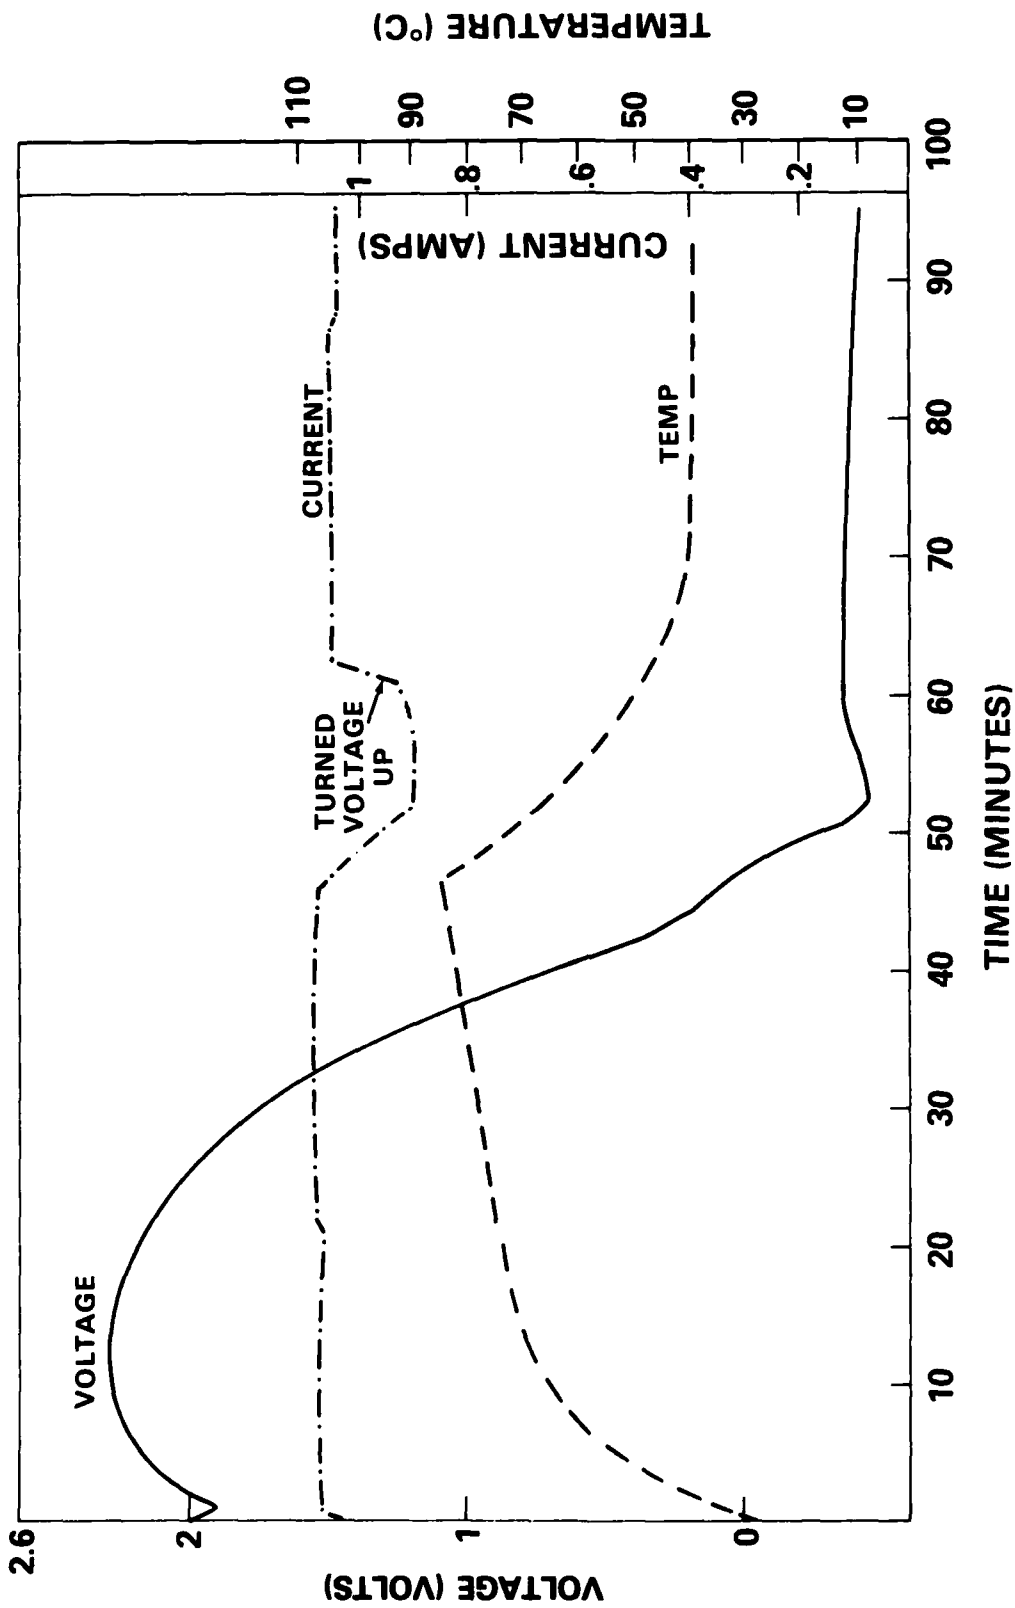


FIGURE 9. FORCED DISCHARGE INTO VOLTAGE REVERSAL ON BR-2/3A CELL (1 AMP)

TABLE 2. SUMMARY OF FORCED DISCHARGE/VOLTAGE REVERSAL TESTS

TEST 1 CELL ONLY	}	1 AMP DISCHARGES
TEST 2 CELL IN TOTALIZER		
TEST 3 CELL ONLY	}	250 mA DISCHARGES
TEST 4 CELL IN TOTALIZER		

	TEST 1	TEST 2	TEST 3	TEST 4
CURRENT (AMPS)	1.05 A	0.98 A	250-275 mA	270 mA
VOLTAGE FALLS BELOW 1 VOLT (TIME)	38 MIN	~41 MIN	190 MIN	240 MIN
TIME VOLTAGE REVERSAL REACHED	48 MIN	50 MIN	245 MIN	250 MIN
- VOLTAGE MAXIMUM	-1.0 V	-1.28 V	-0.51 V	-0.99 V
MAXIMUM TEMPERATURE	84°C	82°C	32.1°C	43.4°C
TIME OF MAXIMUM TEMPERATURE	46.5 MIN	~49 MIN	245 MIN	245 MIN
DISCHARGE RATE	1 AMP	1 AMP	250 mA	250 mA

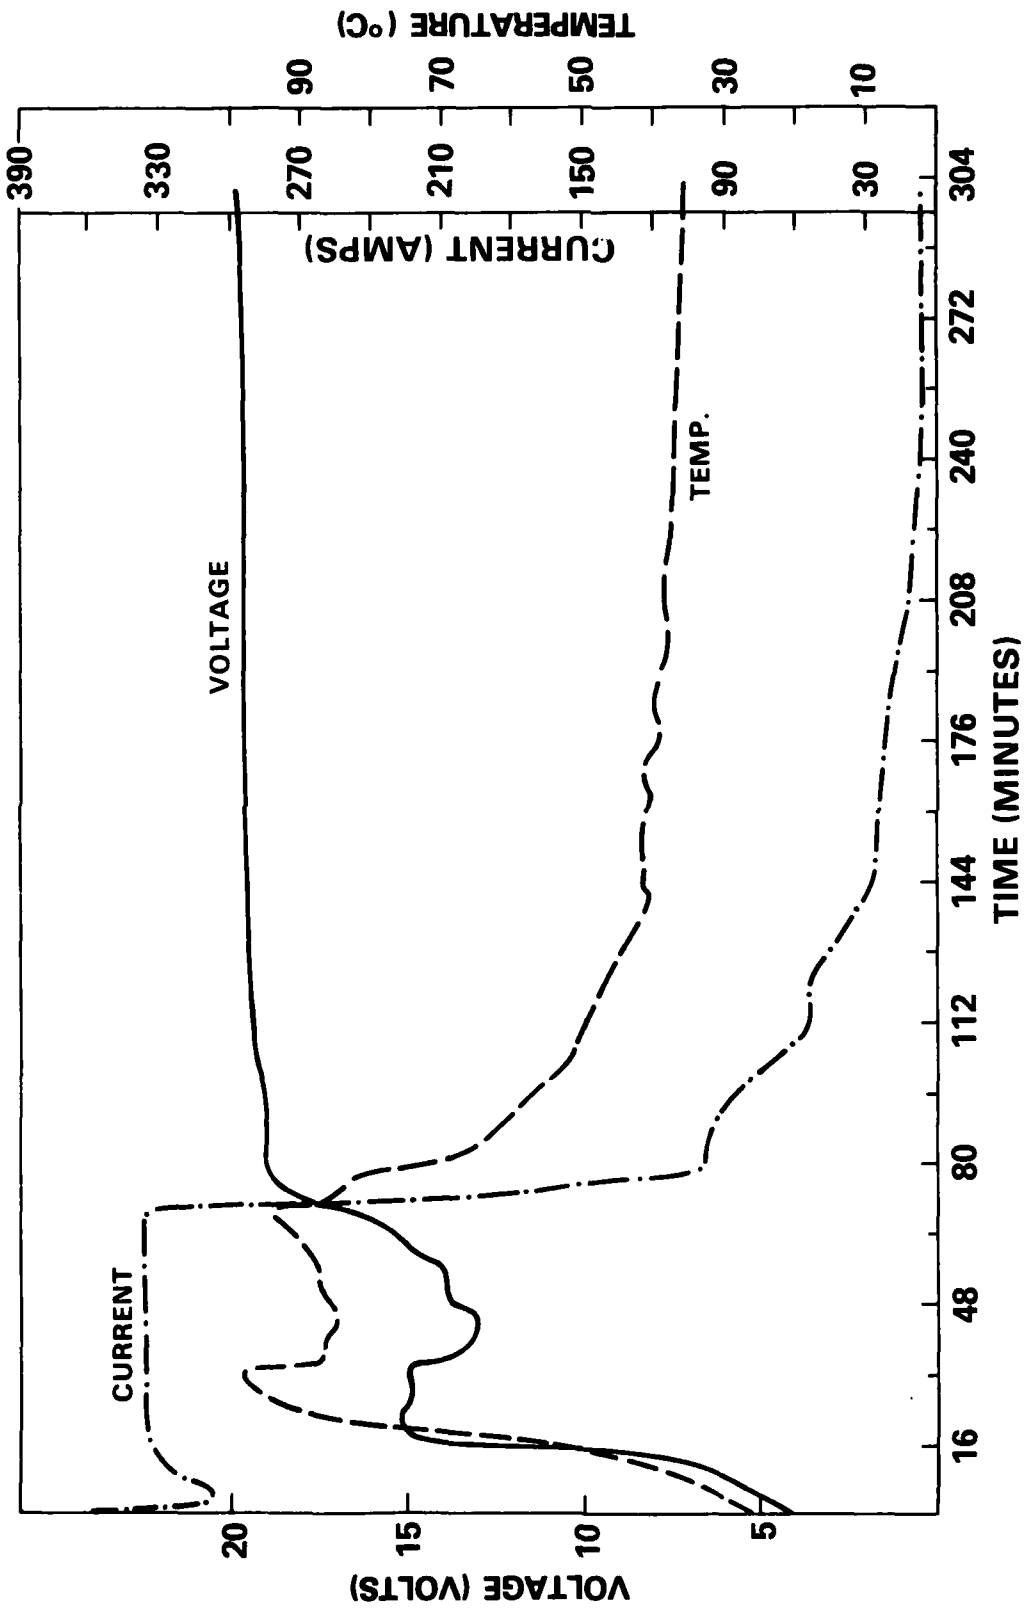


FIGURE 10. 250 mA CHARGING TEST ON FRESH BR-2/3A CELL

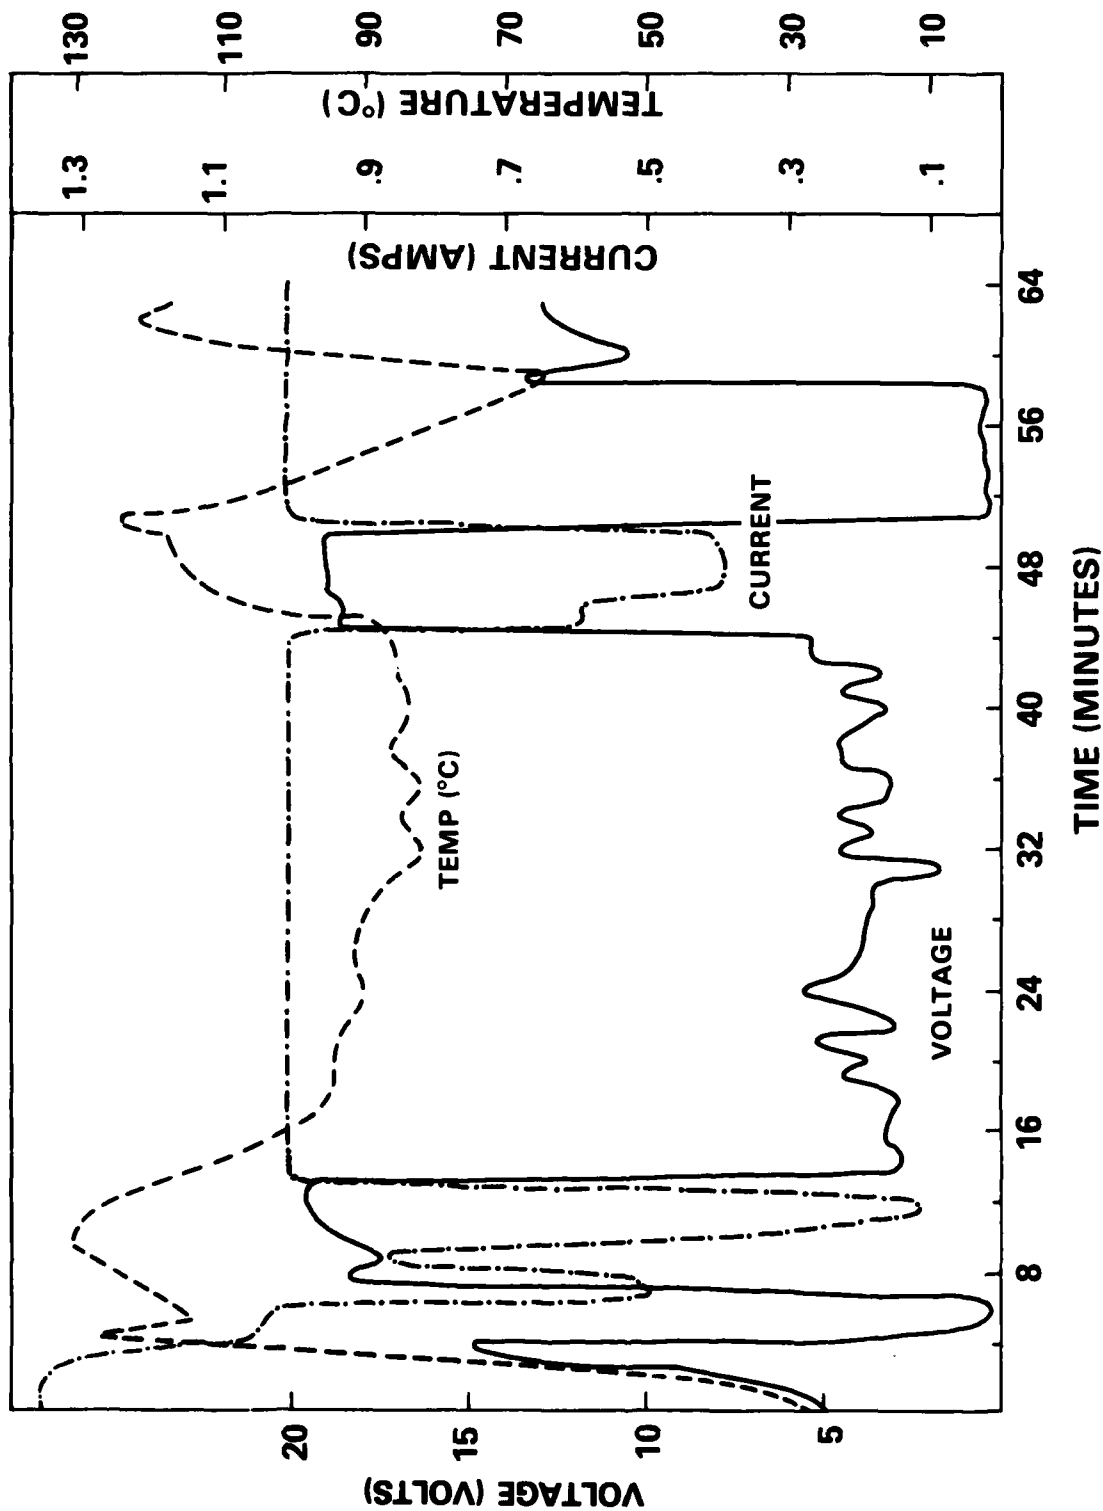


FIGURE 11. 1 AMP CHARGING TEST ON FRESH BR-2/3A CELL



FIGURE 12. PHOTOGRAPH OF TWO CELLS AFTER CHARGING

Those tests that were conducted to only 300°C vented between 200-275°C with loss of voltage, and some minor smoking occurred. Figure 13 presents the typical data obtained for a fresh cell heated to 500°C. On all runs involving fresh cells significant fire and flame erupted between 450-500°C. Initial voltage drop off and venting occurred between 200-275°C. In Figure 13 the temperature rises sharply near 500°C where ignition commenced and a maximum temperature of slightly over 800°C was reached. Those tests on fresh cells conducted in the Totalizer resulted in significant flames escaping from all seams of the Totalizer followed by the Totalizer catching on fire and being totally destroyed. Figure 14 shows the result of the fire on the Totalizer.

Those tests performed on dead cells produced large amounts of smoke at about 450°C, but did not erupt into flames. A test was run on a Totalizer with no cell, but containing a "dummy" cell consisting of a piece of copper tubing wrapped in heat tape and heated to 500°C. This test was designed to determine if the extreme nature of the fire was due only to the battery flames or other internal components and/or plastic erupting into flames. As shown in Figure 15, the tests resulted in some melting and warpage of the Totalizer, but no significant fire or flame was noted. Upon later inspection it appears that some minor charring did occur to the outside case, but at no time was the Totalizer visibly in flames.

As indicated by the manufacturer, the cathode (poly-carbonmonofluoride) is thermally stable up to 400°C. The fact that the majority of incidents (fire or significant smoking) commenced when the battery skin-heat tape interface temperature was approximately 450°C indicates the probable cause of the ignition to be cathode thermal breakdown.

The results of the gas analysis of combustion products is presented in Table 3.³ The tests were run in a pressure vessel with a volume of 169 in.³, and the maximum pressure developed during combustion was approximately 150 p.s.i.g. (Oxygen atmosphere). Listed in Table 3 for each test are two columns of percentages of the various gases. The first column, labeled battery gas, are the percentages that each individual gas comprises when compared to the total gas attributed to originating from the battery. The second column compares the same individual gases to the total gases in the sample (including gases in the pre-combustion atmosphere). The array of gases is largely comprised of low molecular weight hydrocarbons, some of which are unsaturated (Acetylene, Ethylene, and Propylene). Also present are Fluorocarbons, CO₂, CO, Hydrogen and a low level of Benzene (<1%).

Analysis was completed using Mass Spectroscopy. Species present were identified on the basis of their fragmentation patterns in combination with knowledge of the materials present in a fresh cell. Concentration values were determined from peak intensities which were compared with spectra obtained from standard samples.

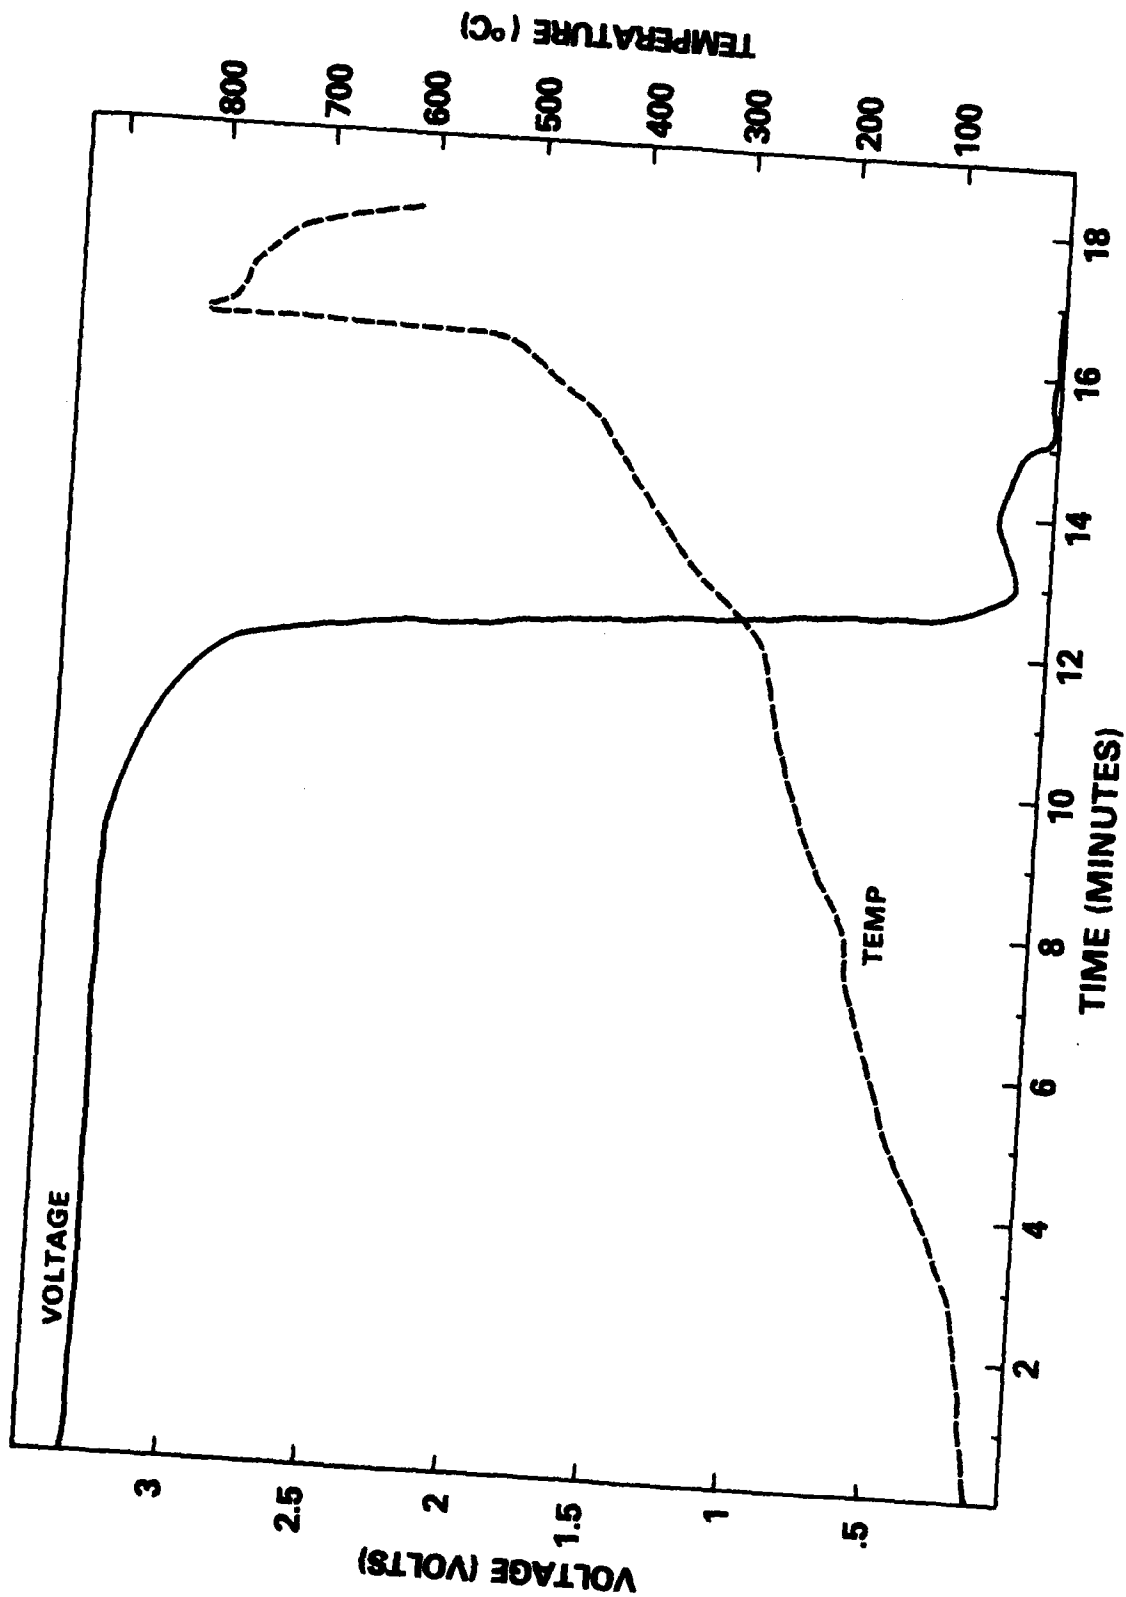


FIGURE 13. HEATING TEST ON BR-2/3A CELL



FIGURE 14. TOTALIZER AFTER HEATING TEST FIRE



FIGURE 15. HEAT TEST OF TOTALIZER WITH NO CELL

TABLE 3. GAS ANALYSIS OF COMBUSTION PRODUCTS
AFTER CELL HEATING

	HELIUM ATMOSPHERE		AIR ATMOSPHERE		OXYGEN ATMOSPHERE		OXYGEN ATMOSPHERE	
	Battery Gas	Total Gas	Battery Gas	Total Gas	Battery Gas	Total Gas	Battery Gas	Total Gas
H ₂	43.8	10.1	33.2	13.0	16.4	15.2	16.3	15.0
CH ₄	12.7	2.9	10.6	4.2	5.7	5.2	5.2	14.8
Acetylene	7.9	1.8	4.0	1.6	1.2	1.1	0.2	0.1
Ethylene	12.1	2.8	10.1	4.0	2.8	2.6	2.1	1.9
CO	6.0	1.4	12.7	5.0	21.0	19.4	30.8	28.2
Propylene	6.6	1.5	3.0	1.2	0.5	0.4	0.6	0.5
CO ₂	4.2	1.0	22.5	8.8	50.7	46.9	44.1	40.5
C _x F _x	5.7	1.3	3.1	1.2	1.1	1.0	0.3	0.2
Benzene	0.9	0.2	0.8	0.3	0.5	0.4	0.4	0.3
He	-	73.1	-	-	-	-	-	-
N ₂	-	3.5	-	59.6	-	5.0	-	5.7
O ₂	-	0.2	-	0.5	-	2.5	-	2.4
Ar	-	0.2	-	0.6	-	0.1	-	0.1

All Figures are Volume Percentages,
Volume of Pressure Vessel = 169 in.³

REFERENCES

1. NAVSEAINST 9310.1, March 1979.
2. Panasonic Lithium Batteries Technical Handbook, 1983.
3. Dorko, William D., "Mass Spectrometric Analysis of Gaseous Off-gas Products of Four Carbon Monofluoride Lithium Batteries," National Bureau of Standards Report of Analysis 553-11-84, Feb., 1984.

DISTRIBUTION

	<u>Copies</u>		<u>Copies</u>
Defense Technical Information Center		Commander	
Cameron Station		Naval Weapons Center	1
Alexandria, VA 22314	12	Attn: Code 38 (E. Royce)	1
		Code 3852 (A. Fletcher)	1
		Mr. L. Pracchia	1
Commander		China Lake, CA 93555	
Naval Sea Systems Command			
Attn: SEA 06R (D. J. Pastine)	1	Office of Naval Research	
SEA 63R3 (F. Romano)	1	Attn: ONR 472 (G. Neece)	1
SEA 9823	1	ONR 472 (J. Smith)	1
SEA 06H (E. Daugherty)	2	800 N. Quincy Street	
SEA 09G32	2	Arlington, VA 22217	
SEA 921AN			
(LCDR K. A. Tobin)	1	Commander	
NAVSEA 543	1	Naval Weapons Support Center	
Washington, DC 20362		Electrochemical Power Sources Division	
Commander		Attn: Code 305 (M. Robertson)	1
Naval Ocean Systems Center		Code 3061 (S. Shuler)	1
Attn: Code 922	1	Code 7056 (R. Haag)	1
Code 712 (J. McCartney)	1	Crane, IN 47522	
Code 6343 (S. Spazk)	1		
San Diego, CA 92152		Commander	
Commander		Naval Electronics Systems Command	
Naval Intelligence Support Center		Attn: Code PME 124-31	
Attn: Code 362 (H. Ruskie)	1	(A. H. Sobel)	1
Washington, DC 20390		NAVELEX 01K (A. Sliwa)	1
		40736 (W. J. Weingartner)	1
		PME 110-242W (W. J. Hunter)	1
		Washington, DC 20360	
Office of Navy Technology			
Associate Director		Commander	
Attn: Support Technology (072)	1	Naval Air Development Center	
800 N. Quincy Street		Attn: Library	1
Arlington, VA 22217		Warminster, PA 18974	

NSWC TR 83-508

DISTRIBUTION (Cont.)

	<u>Copies</u>		<u>Copies</u>
Chief of Naval Operations Operating Evaluation Group Washington, DC 20360	1	Commander Naval Underwater Systems Center Attn: Code 3642 (R. Lazar) (J. Moden) Newport, RI 02840	2 1
David W. Taylor Naval Ship Research and Development Center Annapolis Laboratory Attn: Code 2724 (H. R. Urbach) Annapolis, MD 21401	1	Navy Environmental Health Center Attn: J. R. Crawl, Head Hazardous Mat. Eval. Branch Naval Station Norfolk, VA 23511	1
US Army HQDA-DAEN-ASR-SL Washington, DC 20314	1	Altus Corporation 1610 Crane Court San Jose, CA 95112	1
US Army Electronics Command Attn: Code DELET-P (T. Reiss) Code DRSEL-TR-PR (Dr. S. Gilman) Fort Monmouth, NJ 07703	1 1	Yardney Electric Corporation Attn: Library 82 Mechanic Street Pawcatuck, CT 02891	1
Air Force Aero Propulsion Lab Attn: AFAPL/OPE-1 (W. S. Bishop) AFAPL/OPE-1 (D. Marsh) Wright-Patterson AFB, OH 45433	1 1	Duracell Inc. Attn: B. McDonald South Broadway Tarrytown, NY 10591	1
Central Intelligence Agency Attn: OTS (C. Scuille) Washington, DC 20505	1	Power Conversion, Inc. 495 Boulevard Elmwood Park, NJ 07407	1
Headquarters Department of Transportation U. S. Coast Guard Ocean Engineering Division Attn: GEOE-3/61 (R. Potter) Washington, DC 20590	1	Duracell Inc. Laboratory for Physical Science Attn: Library Burlington, MA 01803	1
NASA Goddard Space Flight Center Attn: Code 711 Greenbelt, MD 20771	1	Eagle-Picher Industries Couples Department Attn: Library Joplin, MO 64801	1
NASA Langley Attn: Code 488 (James Bene) Hampton, VA 23665	1	Spartan Electronics Attn: Carroll H. Bush 2400 East Ganson Street Jackson, MI 49202	1
NASA Johnson Space Center NASA Rd 1 Attn: Code EP5 (B. J. Bragg) Houston, TX 77058	1	Sonatech, Inc. Attn: R. Cyr 700 Francis Botello Road Goleta, CA 93017	1

DISTRIBUTION (cont.)

	<u>Copies</u>		<u>Copies</u>
Lockheed Palo Alto Research Laboratory Lockheed Missiles & Space Co., Inc. Attn: Library 3251 Hanover Street Palo Alto, CA 94304	1	Sanders Associates Attn: George Disco 95 Canal Street Nashua, NH 03061	1
McDonnell Douglas Corporation 1150 17th Street, NW Suite 500 Washington, DC 20036	1	Wilson Greatbatch Ltd. Attn: Dr. Arnold Keller 10,000 Wehrle Drive Clarence, NY 14031	1
Magnavox Department 529 Attn: Carl Keuneke 1313 Production Road Fort Wayne, IN 46808	1	EIC Corporation Attn: Dr. K. M. Abraham 55 Chapel Street Newton, MA 02158	1
RAY-O-VAC Attn: R. F. Udell B. C. Bergum 101 East Washington Avenue Madison, WI 53703	1 1	General Electric Co. Attn: Dr. R. W. Race, Manager Advance Programs Marketing Room 2544A - OP#2 100 Plastics Avenue Pittsfield, MA 01201	1
Gould, Inc. Gould Laboratories 40 Gould Center Rolling Meadows, IL 60000	1	Norton Air Force Base Attn: Code BMO/ENBE (Capt. A. S. Alanis) Code AFISC/SES Norton AFB, CA 92409	1 1
The Boeing Company Attn: Dr. A. C. Johnson PO Box 3707 Seattle, WA 98124	1	Battery Engineering Attn: Dr. N. Marincic 80 Oak Street Newton, MA 02164	1
GTE Laboratories, Inc. Attn: Library 40 Sylvan Road Waltham, MA 02154	1	NOAA Data Buoy Center Attn: Mr. D. Scully NSTL STATION, MS 39529	1
Martin Marietta Aerospace Attn: John W. Wear PO Box 179 Denver, CO 80201	1	Teledyne Electronics Attn: Mr. G. Lamb 649 Lawrence Drive Newbury Park, CA 91320	1
		Mare Island Naval Ship Yard Attn: Code 280.08 Stop 060 (R. Houlder) Vallejo, CA 94592	1

DISTRIBUTION (cont.)

	<u>Copies</u>		<u>Copies</u>
GTE Sylvania Attn: Dr. R. McDonald 189 B Street Needham Heights, MA 02194	1	Acoustic Systems, Inc. Attn: Dr. James Fish 600 Norman Firestone Road Goleta, CA 93117	1
The Aerospace Corporation Attn: Mr. Albert Heller 2350 East El Segundo Blvd. PO Box 92957 Los Angeles, CA 90009	1	Dr. Robert Murphy Advance Battery Group 269 Westwood Road Lancaster, NY 14086	1
Mr. David Yedwab AMCCOM Bldg. 61 South Dover, NJ 07801	1	Jet Propulsion Laboratory Code 198-220 (G. Halpert) 4800 Oak Grove Drive Pasadena, CA 91109	2
Mr. Les Hanson Code 3042 Naval Air Dev. Center Warminster, PA 18974	1	Mr. William Dorko B364 (CHEM) National Bureau of Standards Washington, DC 20234	1
Honeywell Incorporated Power Sources Center Attn: Library 104 Rock Road Horsham, PA 19044	1	Library of Congress Attn: Gift and Exchange Division Washington, DC 20540	4
 <u>Internal Distribution:</u>			
R30	1		
R33 (Mueller)	2		
R33 (Staff)	20		
R33 (Bis)	70		
E35	1		
E431	9		
E432	3		

END

FILMED

12-84

DTIC