

AD-A147 685


S-3A BALLAST BLOCK FINAL DESIGN AND ENGINEERING TESTS
(U) NAVAL AIR DEVELOPMENT CENTER WARMINSTER PA AIRCRAFT
AND CREW S... D LORCH ET AL. 22 FEB 84 NADC-84015-60


1/1

UNCLASSIFIED

F/G 1/3

NL

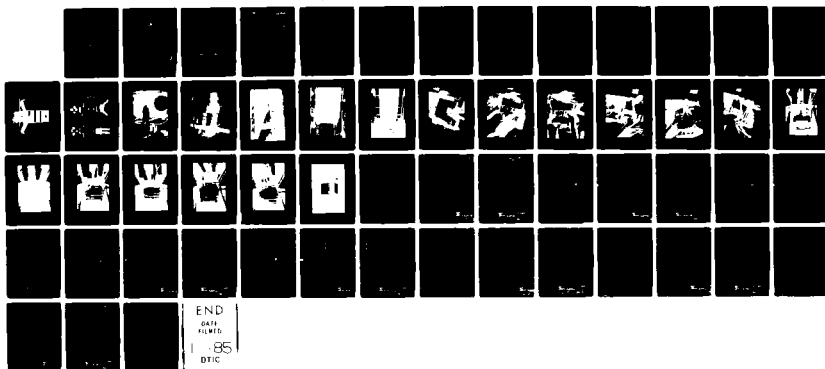



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A147 685



S-3A BALLAST BLOCK FINAL DESIGN AND ENGINEERING TESTS

Dan Lorch and John Quartuccio
Aircraft and Crew Systems Technology Directorate
NAVAL AIR DEVELOPMENT CENTER
Warminster, Pennsylvania 18974

22 FEBRUARY 1984

FINAL REPORT
AIRTASK NO. F41400

DTIC
NOV 23 1984
E

Approved for Public Release; Distribution is Unlimited

Prepared For
NAVAL AIR SYSTEMS COMMAND
Department of the Navy
Washington, DC 20361

DTIC FILE COPY

84 11 14 014

NOTICES

REPORT NUMBERING SYSTEM – The numbering of technical project reports issued by the Naval Air Development Center is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Command Office or the Functional Directorate responsible for the report. For example: Report No. NADC-78015-20 indicates the fifteenth Center report for the year 1978, and prepared by the Systems Directorate. The numerical codes are as follows:

CODE	OFFICE OR DIRECTORATE
00	Commander, Naval Air Development Center
01	Technical Director, Naval Air Development Center
02	Comptroller
10	Directorate Command Projects
20	Systems Directorate
30	Sensors & Avionics Technology Directorate
40	Communication & Navigation Technology Directorate
50	Software Computer Directorate
60	Aircraft & Crew Systems Technology Directorate
70	Planning Assessment Resources
80	Engineering Support Group

PRODUCT ENDORSEMENT – The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

APPROVED BY:



DATE:

15 August 1984

T. J. GALLAGHER, CAPT, MSC, USN

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NADC-84015-60	2. GOVT ACCESSION NO. AD-A147685	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) S-3A Ballast Block Final Design and Engineering Tests	5. TYPE OF REPORT & PERIOD COVERED FINAL REPORT	
7. AUTHOR(s) Dan Lorch and John Quartuccio	6. PERFORMING ORG. REPORT NUMBER	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Aircraft and Crew Systems Technology Directorate Naval Air Development Center Warminster, PA 18974	8. CONTRACT OR GRANT NUMBER(s)	
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command Code 5113K, Department of the Navy Washington, DC 20361	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NAVAIR Task No. A059-44/ 001-2/1244-000-615	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	12. REPORT DATE 22 February 1984	
	13. NUMBER OF PAGES	
	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) Approved for Public Release; Distribution Unlimited		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) S-3A Aircraft Ejection Seats Escapac Seat Ballast Block		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The S-3A Ballast Block is a 169 pound (77 Kg) assembly of four (4) interlocking aluminum blocks. It is used to control the trajectory of an unoccupied 1E-1 ejection seat. Tests indicate that it meets all functional and structural requirements for use in the S-3A aircraft. It provides a simple cost effective replacement for anthropomorphic dummies presently being used as ballast.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 68 IS OBSOLETE

S/N 0102- LP-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	Page
LIST OF FIGURES.....	2
SUMMARY.....	3
INTRODUCTION.....	4
BACKGROUND.....	4
DESCRIPTION OF FINAL DESIGN.....	4
DISCUSSION AND TEST RESULTS.....	5
CENTER OF GRAVITY TEST.....	5
ASSEMBLY AND DISASSEMBLY ON 1E-1 SEAT AND ON AISLE STEP.....	7
EJECTION SEAT STATIC LOADS.....	8
AISLE POSITION STATIC LOADS.....	8
CONCLUSIONS.....	8
ACKNOWLEDGEMENT.....	9
REFERENCES.....	9



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

LIST OF FIGURES

Figure	Title	Page
1	S-3A Ballast Block Assembled.	10
2	S-3A Ballast Block Disassembled.	11
3	Crewman Carrying Ballast Block Components.	12
4	Center of Gravity Measurement.	13
5	1000 Pound -G _x Load On Seat.	14
6	1000 Pound +G _x Load in Aisle.	15
7	500 Pound - G _z	16
8	-1 Bottom Block in Seat.	17
9	-2 Block Placed in Seat.	18
10	Routing of Shoulder Restraint Straps.	19
11	Connecting Parachute Riser Straps.	20
12	Connecting Lap Belt Fittings.	21
13	Tightening Straps on Seat.	22
14	-1 Block on Aisle Step.	23
15	-2 Block on Aisle Step.	24
16	-3 Block on Aisle Step.	25
17	-4 Block on Aisle Step.	26
18	Locking Plates in Place.	27
19	Wing Nuts on Locking Plates.	28
20	Top View of Assembly in Aisle.	29
21	Dwg, S-3A Ballast Block, Assembly.	30
22	Dwg, S-3A Ballast Block, -1 Block.	31
23	Dwg, S-3A Ballast Block, -2 Block.	32
24	Dwg, S-3A Ballast Block, -3 Block.	33
25	Dwg, S-3A Ballast Block, -4 Block.	34
26	Dwg, S-3A Ballast Block, Aisle Locking Plates.	35
27	Dwg, S-3A Ballast Block, Strap Assemblies.	36
28	Dwg, S-3A Ballast Block, Stamping Detail.	37
29	1E-1 Ballast Block C.G. Eccentricity with Rocket Thrustline.	38

SUMMARY

The third prototype S-3A Ballast Block weighs 169 pounds (77 Kg). It is an assembly of four interlocking aluminum blocks. One crewman can carry two blocks at a time into the aircraft where he can quickly assemble the unit either on the 1E-1 ejection seat or on the avionics aisleway step. Restraint on the ejection seat is obtained by connecting the four quick disconnect adjuster fittings on the ejection seat to fittings on the Ballast Block. When the Assembly is placed on the avionics aisle steps it is restrained with two aluminum locking plates which are bolted to the top block. These plates extend beyond the edges of the block and fit into keyways on either side of the main bulkhead forgings directly behind the aft ejection seats.

When the Block is secured on the 1E1-1 seat the overall center of gravity falls 0.72 inches below the centerline of rocket thrust. The Ballast Block meets all operational and structural requirements for safe function in the aircraft. It can be maintained at the Operational level; the only parts that may need replacement are straps which are readily available.

The S-3A Ballast Block provides a simple and cost effective replacement for anthropomorphic dummies presently being used to ballast unoccupied 1E1 ejection seats.

INTRODUCTION

BACKGROUND

The S-3A aircraft has (4) ejection seats. Both the pilot and copilot have Command Eject Selector levers which allow them the option to eject all crewmembers or "Self Eject." If one of the aft seats is unoccupied, and "Command Eject" is selected, the unoccupied seat will accelerate ahead of the occupied seat next to it. Two hazards exist; first, the crewmember next to the unoccupied seat could be burned by the rocket plume from the empty seat which has a higher acceleration; second, the empty seat could tumble into one of the other seats because the center of gravity and the center of rocket thrust are too far apart. To eliminate these hazards it is necessary to ballast the unoccupied seat. This is presently being done with anthropomorphic test dummies, if they can be obtained. Unfortunately these dummies have various weights and are usually damaged (i.e. arms, legs, or head missing). There is no guarantee that the center of gravity is in the proper location to prevent tumbling. To correct this potentially dangerous situation the Naval Air Systems Command tasked the Naval Air Development Center to design a ballast block. After the initial prototype was developed and tested, references (1) and (2) recommended changes to be incorporated into the final design. All of these recommendations have been incorporated into the final design.

DESCRIPTION OF FINAL DESIGN

The S-3A Ballast Block is an assembly of four (4) interlocking aluminum blocks that can be strapped into an ESCAPAC 1E-1 seat and can also be securely stored in the aisle on the avionics bay step of the S-3A aircraft (figures 1 & 2).

Two blocks at a time can be carried by one man (figure 3). Each block weighs about 42 pounds (19 Kg).

Straps on the top and bottom blocks have quick disconnect fittings that mate with the parachute/inertia reel straps and with the survival kit straps to mount the assembly on the 1E1 ejection seat (figure 11).

Each block has a handle and a finger ledge on two sides that enable the crewmember to assemble the blocks on the seat without danger of pinching fingers (figure 4).

The center of gravity of the block/seat assembly falls less than one inch (three centimeters) below the center of the rocket thrustline (figure 29).

Aluminum is used to make the assembly antimagnetic so as not to interfere with submarine detection systems.

Each block is stenciled with its number to simplify assembly (figure 1).

Two locking plates are bolted to the top block. They are used to lock the assembly in the aisle position for catapult, arrestment, and flight loads (figure 19).

DISCUSSION AND TEST RESULTS

After the second prototype S-3A Block Assembly (reference 1) was tested at the Naval Air Test Center several problems were uncovered (reference 2);

- a. The method for stowing the assembly in the aircraft aisle was not adequate.
- b. Steel blocks could possibly interfere with the aircraft Magnetic Anomaly Detector (MAD) system.

A third prototype Block was designed and fabricated using aluminum. It also was taken to the Naval Air Test Center for fit and function tests. In addition, static loads were placed on the assembly to determine if the seat restraint straps and the aisle restraint plates were adequate for 10 G crash, catapult, arrestment, and flight loads.

The final configuration of the Ballast Block is shown on the drawings (figures 21 through 28). It differs from the tested assembly as follows;

- a. The final design does not incorporate a rear finger ledge on each block because the crewmen did not use it during evaluation: this ledge was machined into the test blocks.
- b. The final — 1 block is 14.12 inches long in order to completely span the Avionics Bay step; the test — 1 block was 13.0 inches long.

These changes will improve the performance of the assembly by increasing its weight, and shifting the center of gravity a bit closer to the rocket thrustline.

CENTER OF GRAVITY TEST (figure 4)

Through a series of ESCAPAC seat suspension tests and mathematical calculations the eccentricity of the 1E1-1 seat/ballast block center of gravity was determined to lie 0.72 inches (1.8 cm) below the rocket thrustline (figure 29). Since the STAPAC rocket is capable of maintaining pitch stabilization of the seat up to an eccentricity of 2.0 inches (5.1 cm) the seat should be adequately stabilized.

The 1E1 ejection seat was designed so that the MK16 rocket thrustline lies about one inch below the seat/50 percentile-man center of gravity. During catapult acceleration the overall center of gravity will shift close to the rocket thrustline to minimize the torque rotating the seat. It is expected that the Ballast Block Assembly will not shift more than 1/8 inch (0.3 cm) downward during the catapult acceleration, and therefore the seat/block center of gravity will shift about half of this amount.

Pitch stabilization is further enhanced due to the lower moment of inertia of the seat/block compared to that of a seat/human, therefore the STAPAC rocket will have greater control on the seat at lower air speeds. At high airspeeds the aerodynamic forces control the seat trajectory more than the rocket force.

CENTER OF GRAVITY OF 1E-1 SEAT WITH S-3A BALLAST BLOCK

TEST CONDITIONS:

1. Ballast Block assembly tested without fore and aft extensions on bottom block.
2. IG-2 ESCAPAC seat used with parachute, empty RSSK, and empty catapult.
3. All measurements made from lower seat roller; Z along roller centerline.

DATA:

Weight of Ballast Block $W_B = 164.0$ pounds

Weight of IG-2 seat $W_{IG-2} = 108.3$

Weight of 1E-1 seat complete (empty) $W_{1E-1} = 146.9$

C.G. of IG-2 seat with Block $\left(\overset{X}{12.9}, \overset{Z}{14.7} \right)$ inches

C.G. of IG-2 seat empty $(7.9, 17.2)$

C.G. of 1E-1 seat complete (empty) $(7.9, 15.0)$

MK 16 Rocket thrustline intercepts roller centerline 6.8 inches above bottom roller; 57 degrees from roller centerline

CALCULATIONS:

I LOCATION OF BLOCK C.G. RELATIVE TO BOTTOM ROLLER OF IG-2 SEAT

$$W_{IG-2} \cdot x_{IG-2} + W_B \cdot X_B = W_{IG-2/B} \cdot x_{IG-2/B}$$

$$(108.3) 7.9 + 164.0 X_B = (108.3 + 164.0) 12.9$$

$$X_B = 16.2$$

$$W_{IG-2} \cdot Z_{IG-2} + W_B \cdot Z_B = W_{IG-2/B} \cdot Z_{IG-2/B}$$

$$(108.3) 17.2 + 164.0 Z_B = (108.3 + 164.0) 14.7$$

$$Z_B = 13.0$$

II LOCATION OF 1E-1 SEAT/BALLAST BLOCK CENTER OF GRAVITY

$$W_{1E-1} \cdot X_{1E-1} + W_B \cdot X_B = W_{1E-1/B} \cdot X_{1E-1/B}$$

$$(146.9) 7.9 + (164.0) 16.2 = (146.9 + 164.0) X_{1E-1/B}$$

$$X_{1E-1/B} = 12.3$$

$$W_{1E-1} \cdot Z_{1E-1} + W_B \cdot Z_B = W_{1E-1/B} \cdot Z_{1E-1/B}$$

$$(146.9) 15.0 + (164.0) 13.0 = (310.9) Z_{1E-1/B}$$

$$Z_{1E-1/B} = 13.9$$

III ROCKET THRUST ECCENTRICITY WITH 1E-1 SEAT/BLOCK CENTER OF GRAVITY

$$\begin{aligned}
 \text{slope of rocket thrustline} & \quad m = \tan (90^\circ - 57^\circ) = .649 \\
 \text{slope of perpendicular to thrustline} & \quad m_{\perp} = -\frac{1}{m} = -\frac{1}{.649} = -1.54 \\
 \text{rocket thrustline equation} & \quad Z = 0.649 x + 6.8 \\
 \text{line perpendicular to thrustline thru 1E-1/block C.G.} & \\
 & \quad Z = -1.54 x + b \\
 & \quad 13.9 = -1.54 (12.3) + b \\
 & \quad b = 32.8 \\
 & \quad Z = -1.54 x + 32.8
 \end{aligned}$$

INTERCEPT OF BOTH LINES (ROCKET THRUST AND PERPENDICULAR)

$$\begin{cases} Z = 0.649 x + 6.8 & Z = 0.649 (11.9) + 6.8 \\ Z = -1.54 x + 32.8 & Z = 14.5 \text{ inches} \end{cases}$$

$$2.19 x = 32.8 - 6.8$$

$$X = 11.9 \text{ inches}$$

C.G. ECCENTRICITY

$$e = [(Z_2 - Z_1)^2 + (X_2 - X_1)^2]^{1/2}$$

$$e = [(14.5 - 13.9)^2 + (11.9 - 12.3)^2]^{1/2}$$

$$e = 0.72 \text{ inches below thrustline}$$

ASSEMBLY AND DISASSEMBLY ON THE 1E-1 SEAT AND ON THE AISLE STEP

Two blocks at a time can be carried to the aircraft by one crewmember (figure 3).

The first block (-1 Block) should be placed on the RSSK-8A survival kit so that the aft tabs rest against the survival kit back fittings (figure 8). After the other three blocks are stacked onto the seat (figure 9) the shoulder restraint straps are routed up through the block handles and connected to the parachute risers (figures 10,11). Then the 'lap belt' on the top block is connected to the survival kit straps (figures 12, 13). All straps are then tightened, and the inertia reel lever is placed in the 'lock' position.

When the Assembly is to be stowed on the avionics aisle step the -1 Block is placed with the handle towards the aircraft's port side, and the block tangs slide under the lip of the step bulkhead (figure 14). The other three blocks are then stacked on top (figures 15, 16, 17), then the top locking plates are slid into the bulkhead forgings and secured by the two wing nuts (figures 18, 19, 20).

EJECTION SEAT STATIC LOADS

The existing seat lap belt/shoulder harness straps are used to restrain the Ballast Block Assembly. Since these straps are qualified for crash loads it was decided that one test would be sufficient to verify structural integrity of the assembly on the seat.

Forward — A forward load of 1000 pounds was applied to the block assembly simulating a -6 Gx arrested landing; no problems were encountered (figure 5).

Aft — When subjected to catapult loads the Block Assembly is prevented from moving aft by the lap belt strap and seat back. No test was conducted.

Vertical — For vertical loads the Assembly is restrained by the lap belt and seat bucket which are capable of handling all Gz flight or crash design loads on the aircrewman. No test was conducted.

Lateral — Lateral stability is assured by the bottom block side tabs (figure 8) which limit the block center of gravity movement to about 1/2 inch (1.3 cm); this translates to less than 1/4 inch (0.6 cm) of seat/block center of gravity movement. No test was conducted.

AISLE POSITION STATIC LOADS

Aft (Catapult) Loads (figure 6) — A ratchet winch was used to place a 1000 pound aft load on the block assembly to simulate a +6 Gx catapult launch. No problems were encountered.

Forward (Arrestment) Loads — No test was conducted because the Block Assembly contacts the lower section of the avionics bay bulkhead. The entire center aircraft structure would have to fail before the Block Assembly could break loose.

Upward (-Gz) Flight Loads (figure 7) — A ratchet winch was used to place a 500 pound upward load on the Assembly to simulate a -2Gz flight load. This exceeds the design flight loads of the aircraft. No problems were encountered.

Side ($\pm$ Gy) Loads (figure 20) — The aisle locking plates limit the lateral motion of the top block to $\pm 1/4$ inch (1 centimeter). The bottom block is limited to the same motion before contacting the sides of the aisle. No tests were necessary.

Downward (+Gz) Crash Loads — There is a requirement that all new equipment installed in the aircraft must be capable of withstanding a crash load of 10G without breaking loose from its support points. Since the bottom block of the assembly completely spans the avionics bay step the foam core aluminum step has no bending loads. All the load can easily be taken into the angles which support the step (figure 14). Even if the step should fail the Block Assembly would be limited in its vertical motion because of the electronic equipment directly beneath the step. No actual test was conducted.

CONCLUSIONS

1. The S-3A Ballast Block meets all operational and structural requirements for safe utilization in the aircraft.
2. The Ballast Block provides a simple and cost effective replacement for the anthropomorphic dummies presently being used to ballast unoccupied 1E-1 ejection seats.

NADC-84015-60

ACKNOWLEDGEMENTS

Special thanks are due to *CMDR Dick Asbell (Air 5113K)*, the sponsor of this project, for his guidance; to the personnel of the Naval Air Test Center responsible for test and evaluation, LT. *CMDR Dave Architzel*, *CMDR R. H. Johnston*, and *Bob Rogers*; to the NADC shop personnel for their design improvements and an excellent job of fabrication, *Bill Funkbeiner*, *R. Pete Butkus*, and *John Rudolph*.

REFERENCES

1. Lorch, Dan, 4 Nov 1981, Development of An Ejection Seat Ballast Block for the S-3A Aircraft, Report No. NADC-81272-60 Naval Air Development Center, Warminster, PA 18974.
2. Stark, G/Sparks, T., AME 1, July 1981 Feasibility Evaluation of Proposed S-3A Aircraft Ejection Seat Ballast Block Report No. SY-62R-82 Naval Air Test Center, Patuxent River, MD 20670.

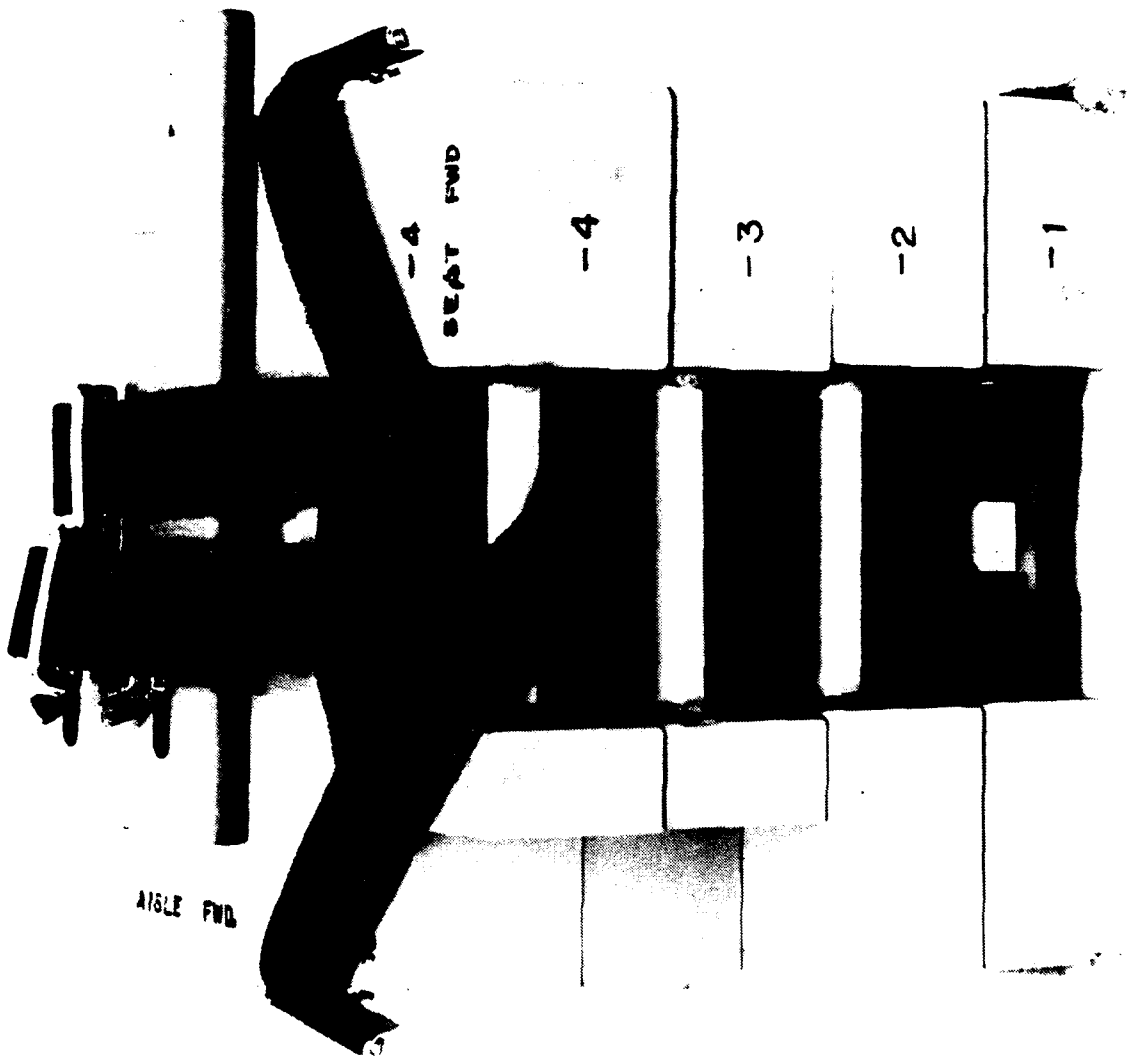


Figure 1. S-3A Ballast Block Assembled

NADC-84015-60

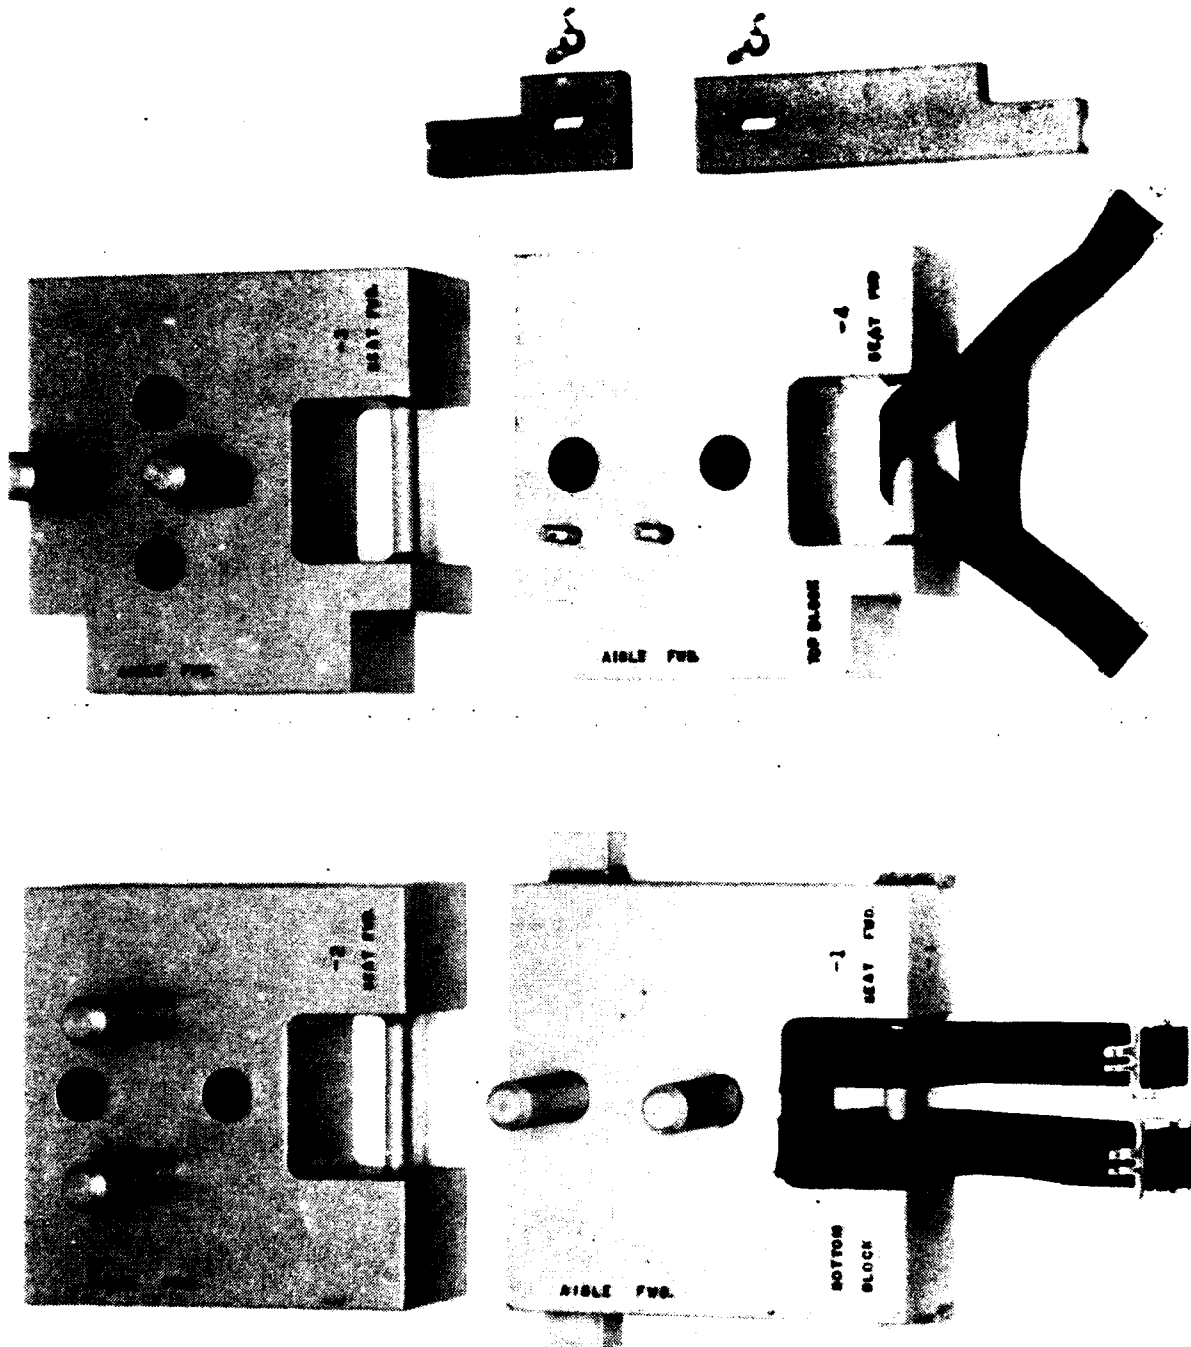


Figure 2. S-3A Ballast Block Disassembled

NADC-84015-60

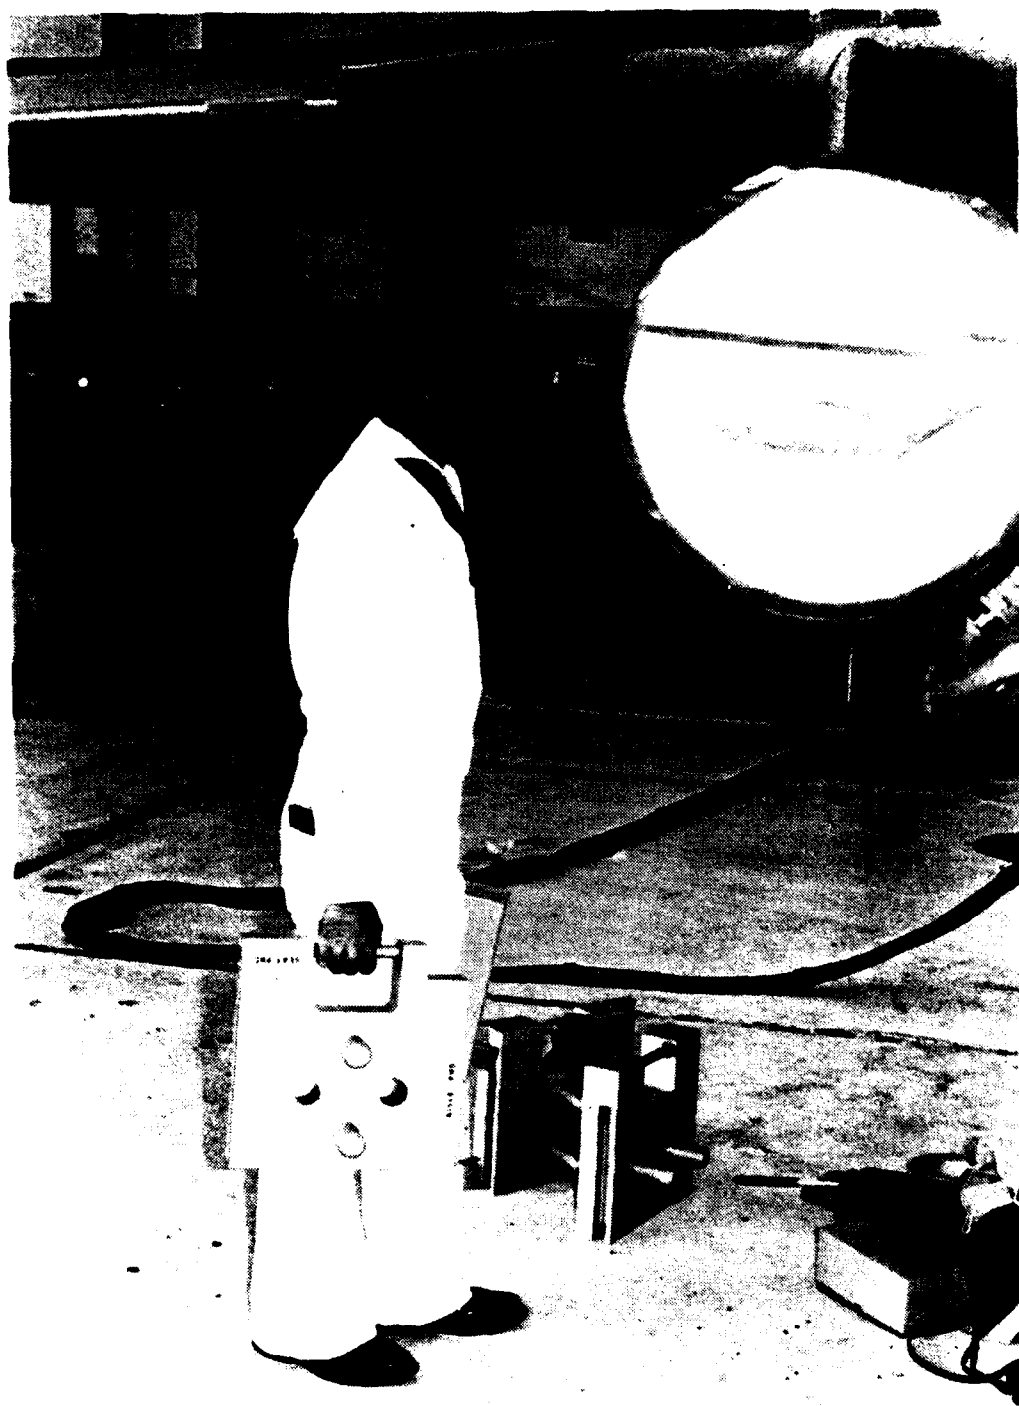


Figure 3. Crewman Carrying Ballast Block Components

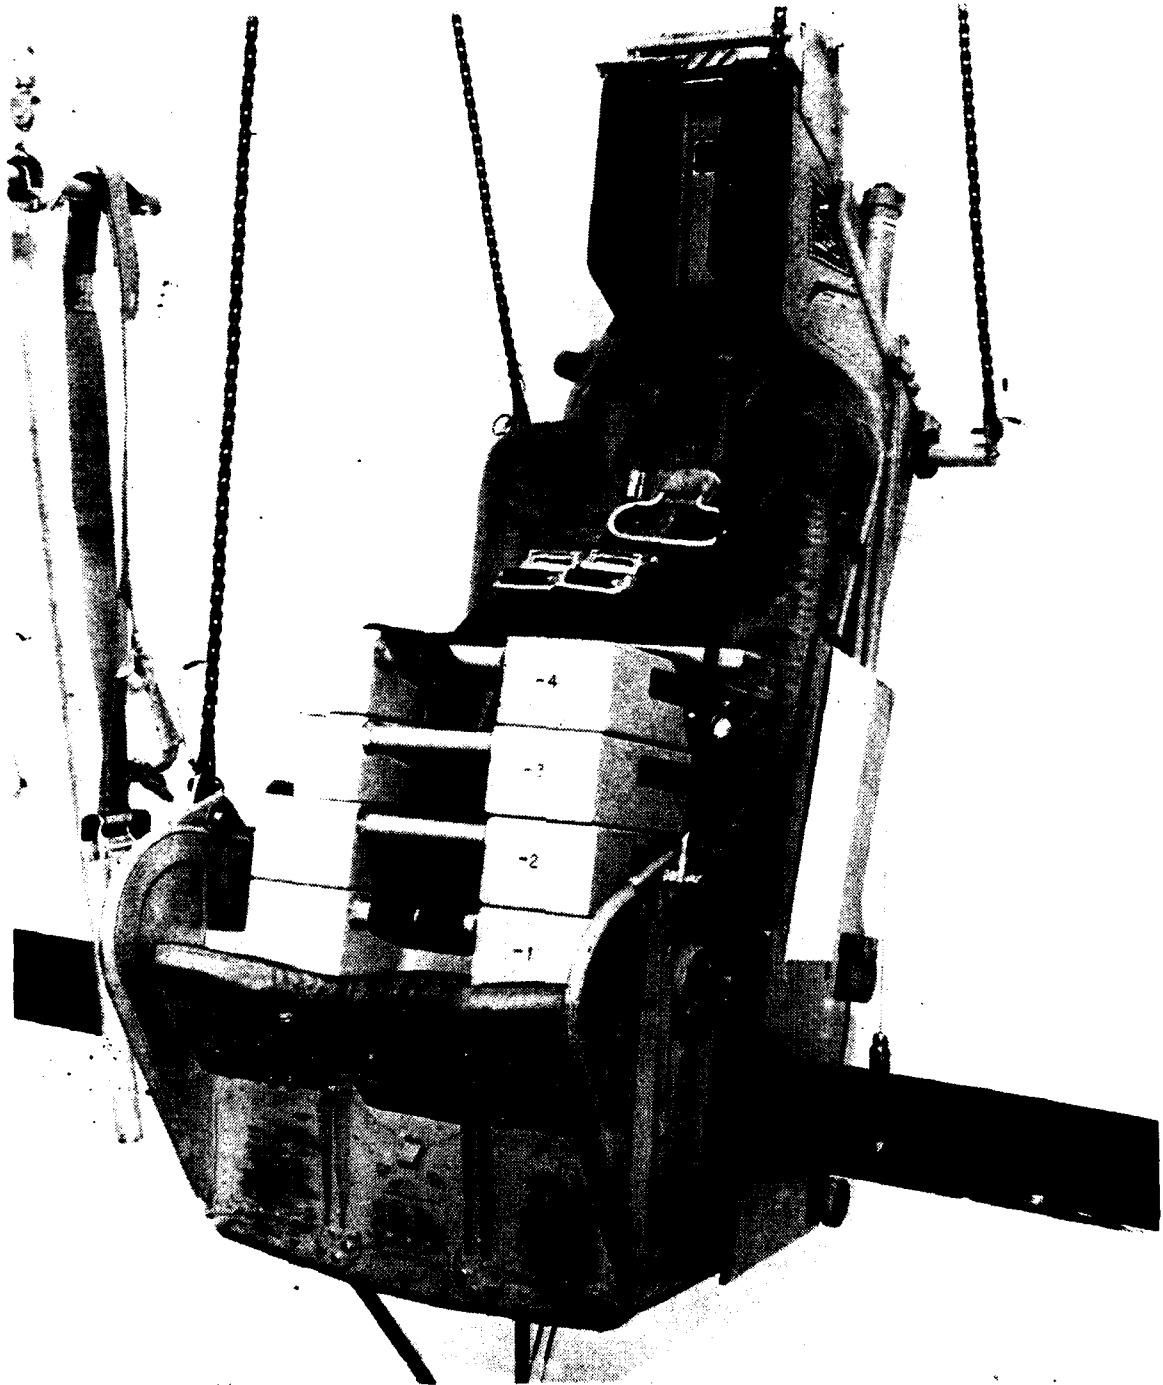


Figure 4. Center of Gravity Measurement



Figure 5. 1000 Pound - G_x Load On Seat

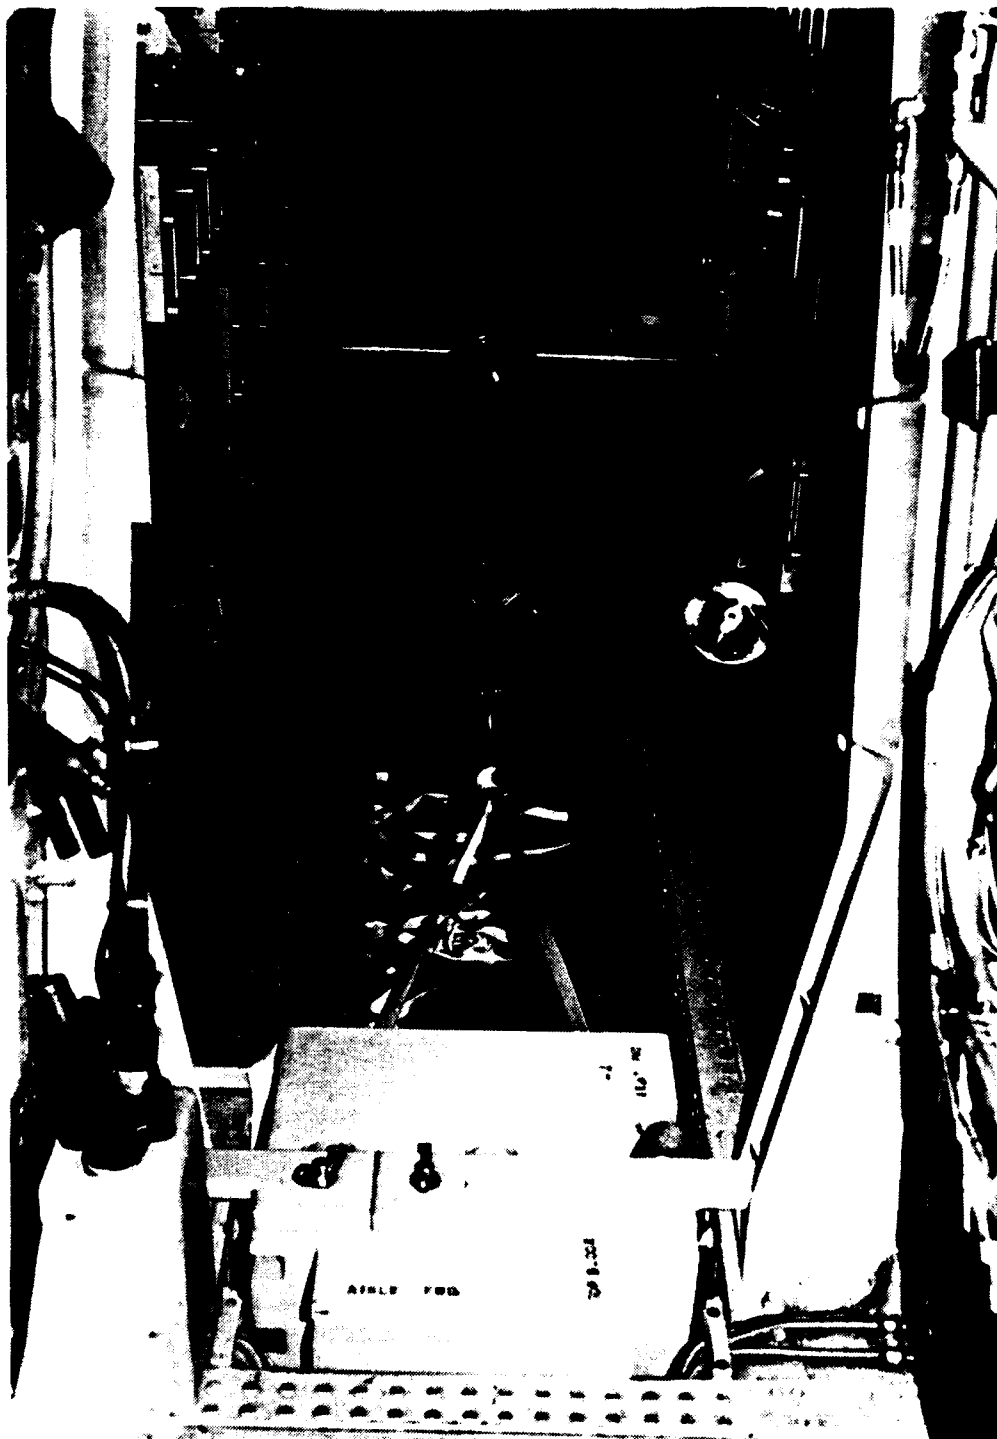


Figure 6. 1000 Pound $+G_x$ Load in Aisle



Figure 7. 500 Pound $-G_z$ Load in Aisle

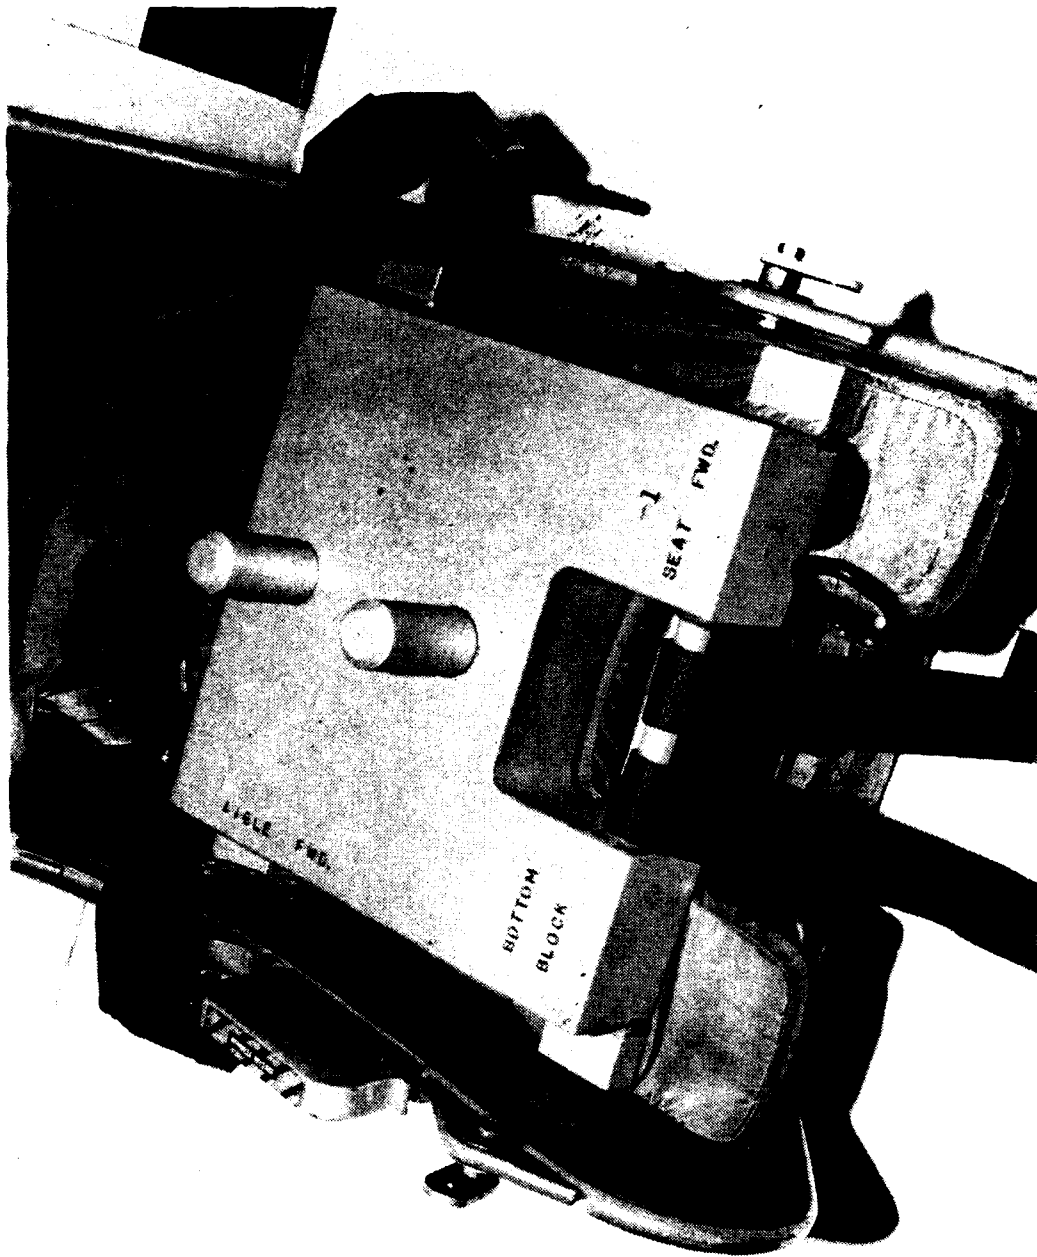


Figure 8. -1 Bottom Block in Seat



Figure 9. -2 Block Placed in Seat

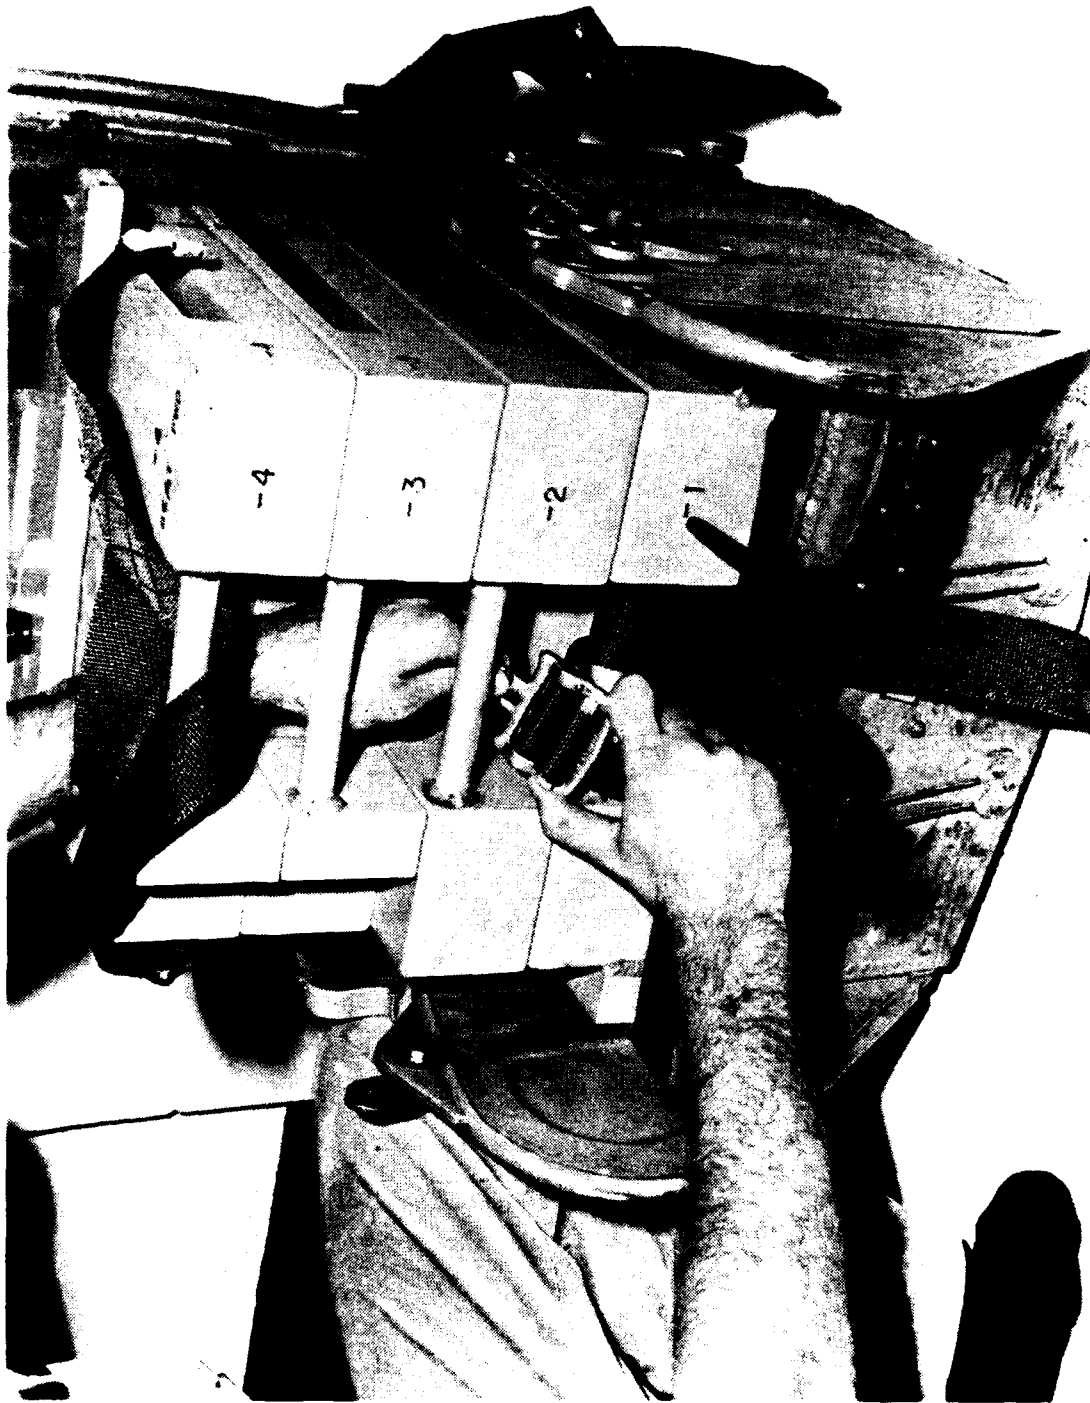


Figure 10. Routing of Shoulder Restraint Straps

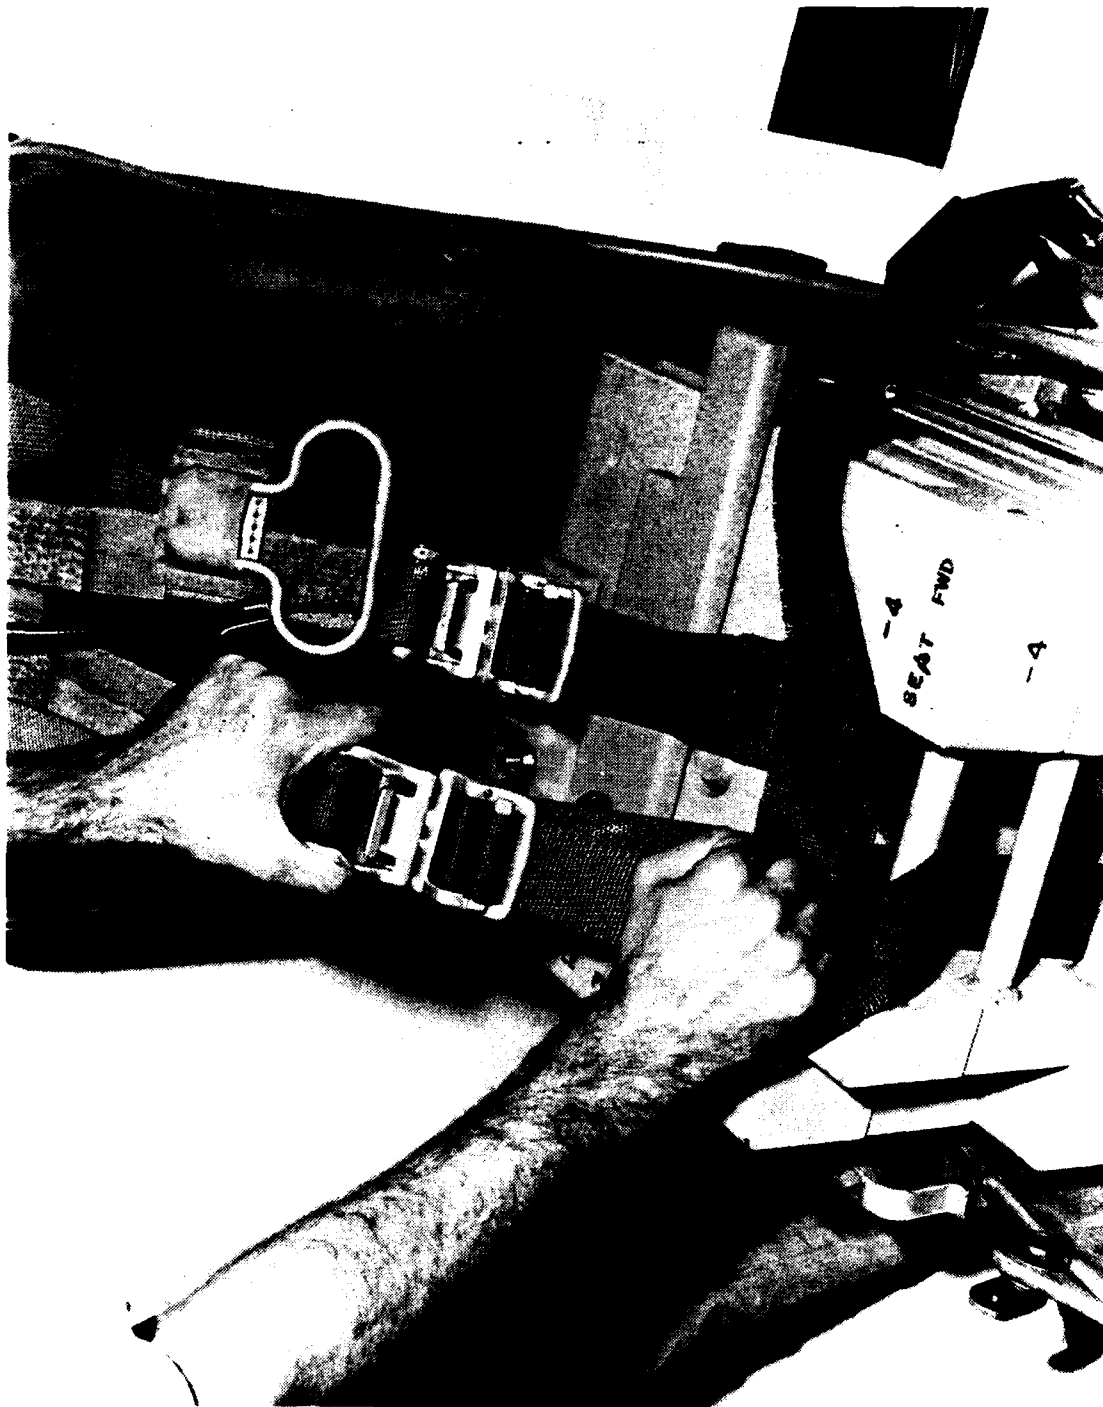


Figure 11. Connecting Parachute Riser Straps



Figure 12. Connecting Lap Belt Fittings

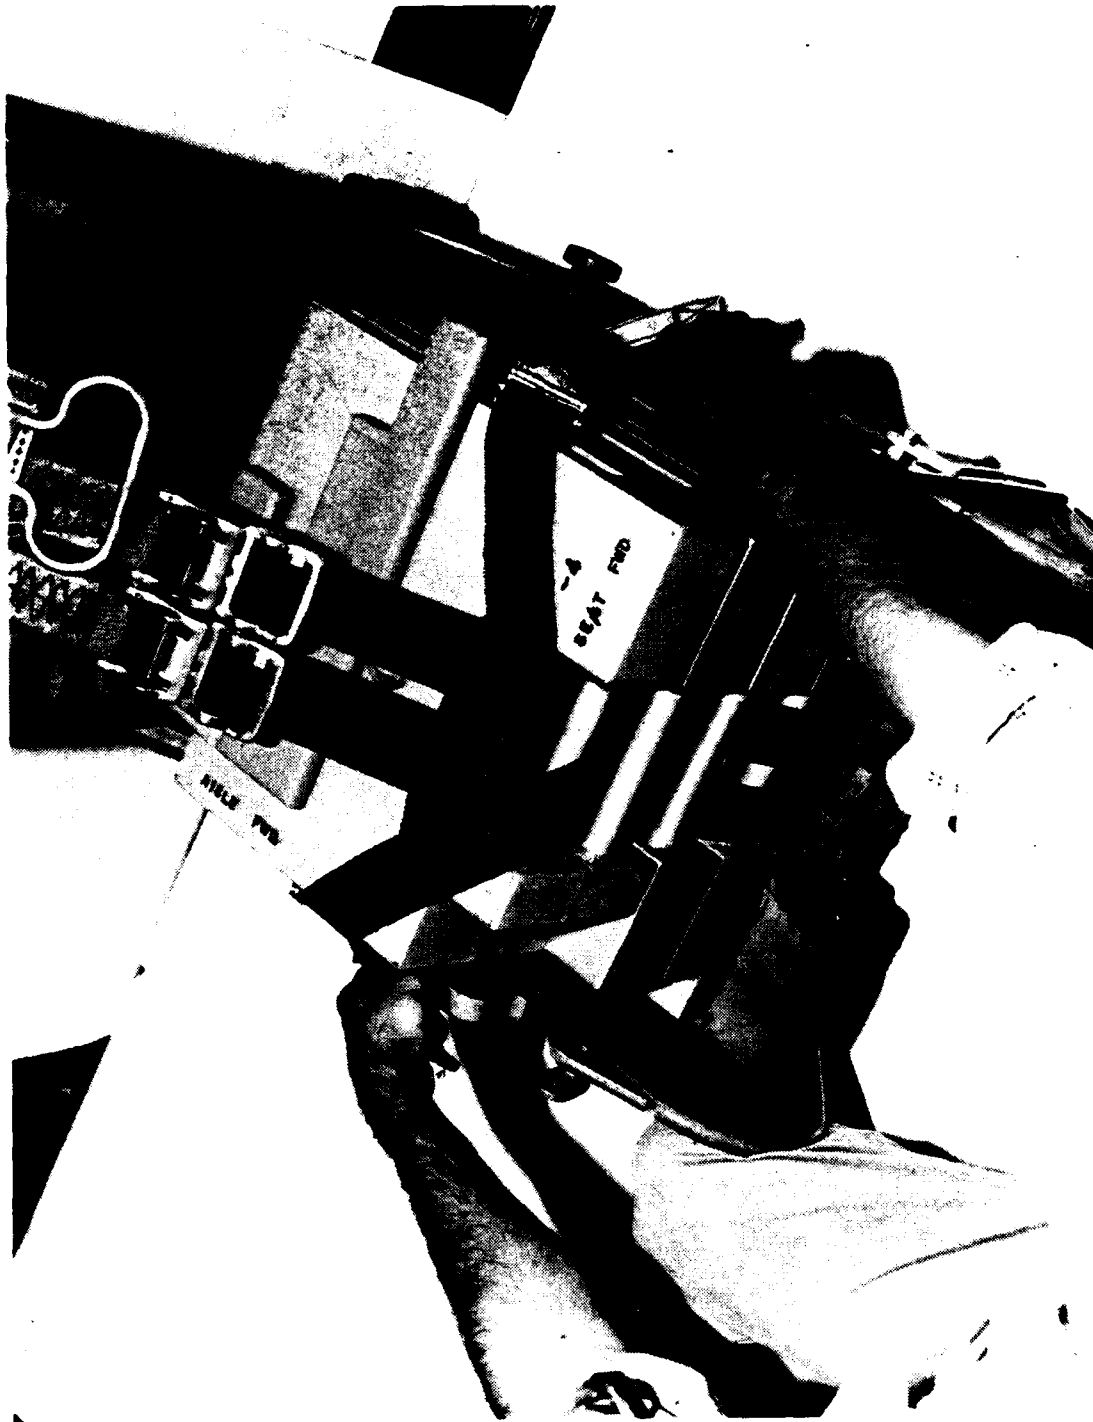


Figure 13. Tightening Straps on Seat

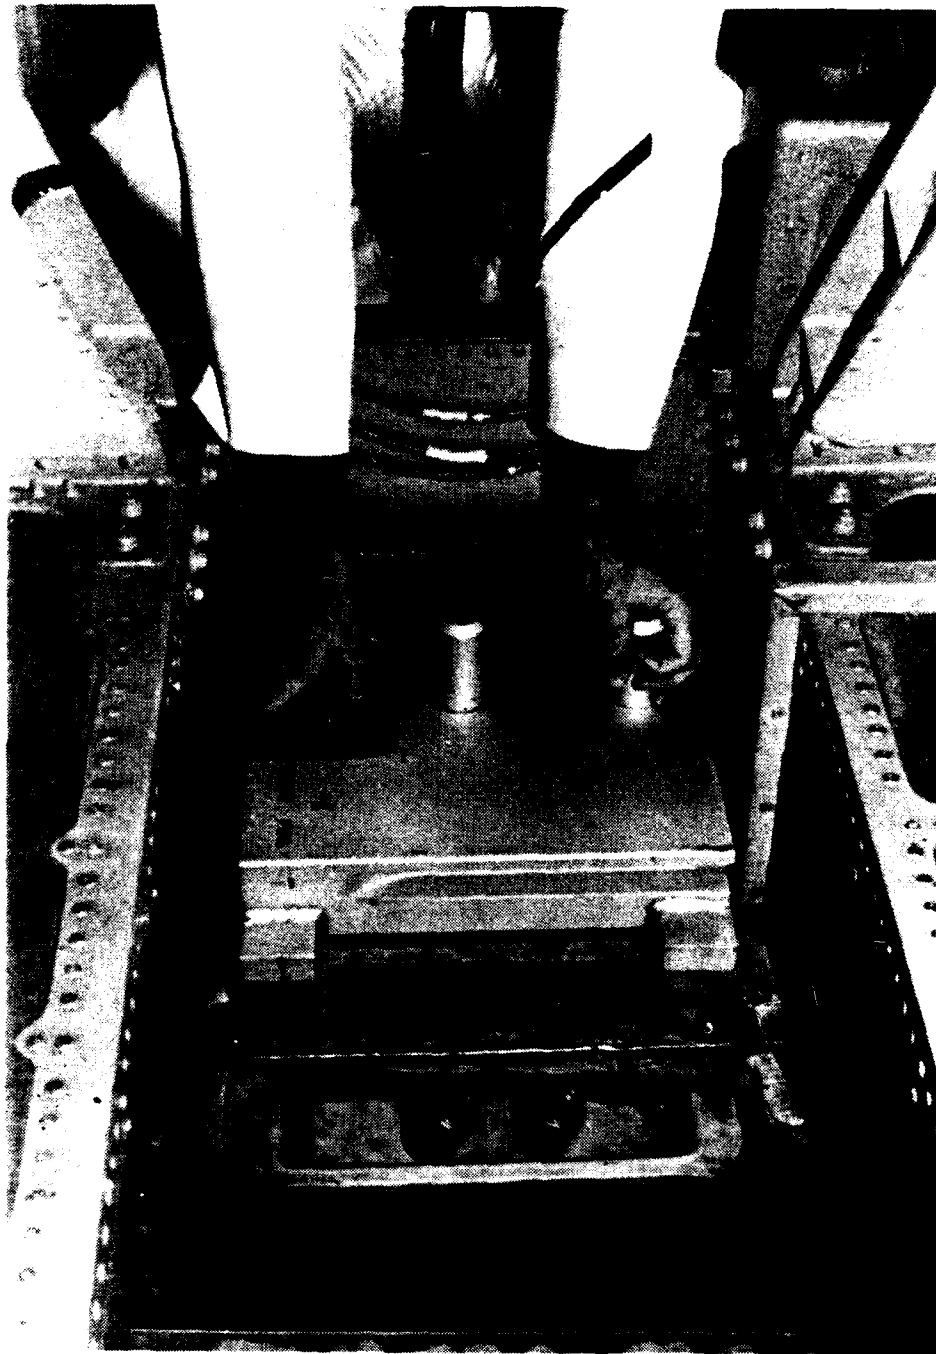


Figure 14. -1 Block on Aisle Step

NADC-84015-60



Figure 15. -2 Block on Aisle Step



Figure 16. -3 Block on Aisle Step



Figure 17. —4 Block on Aisle Step

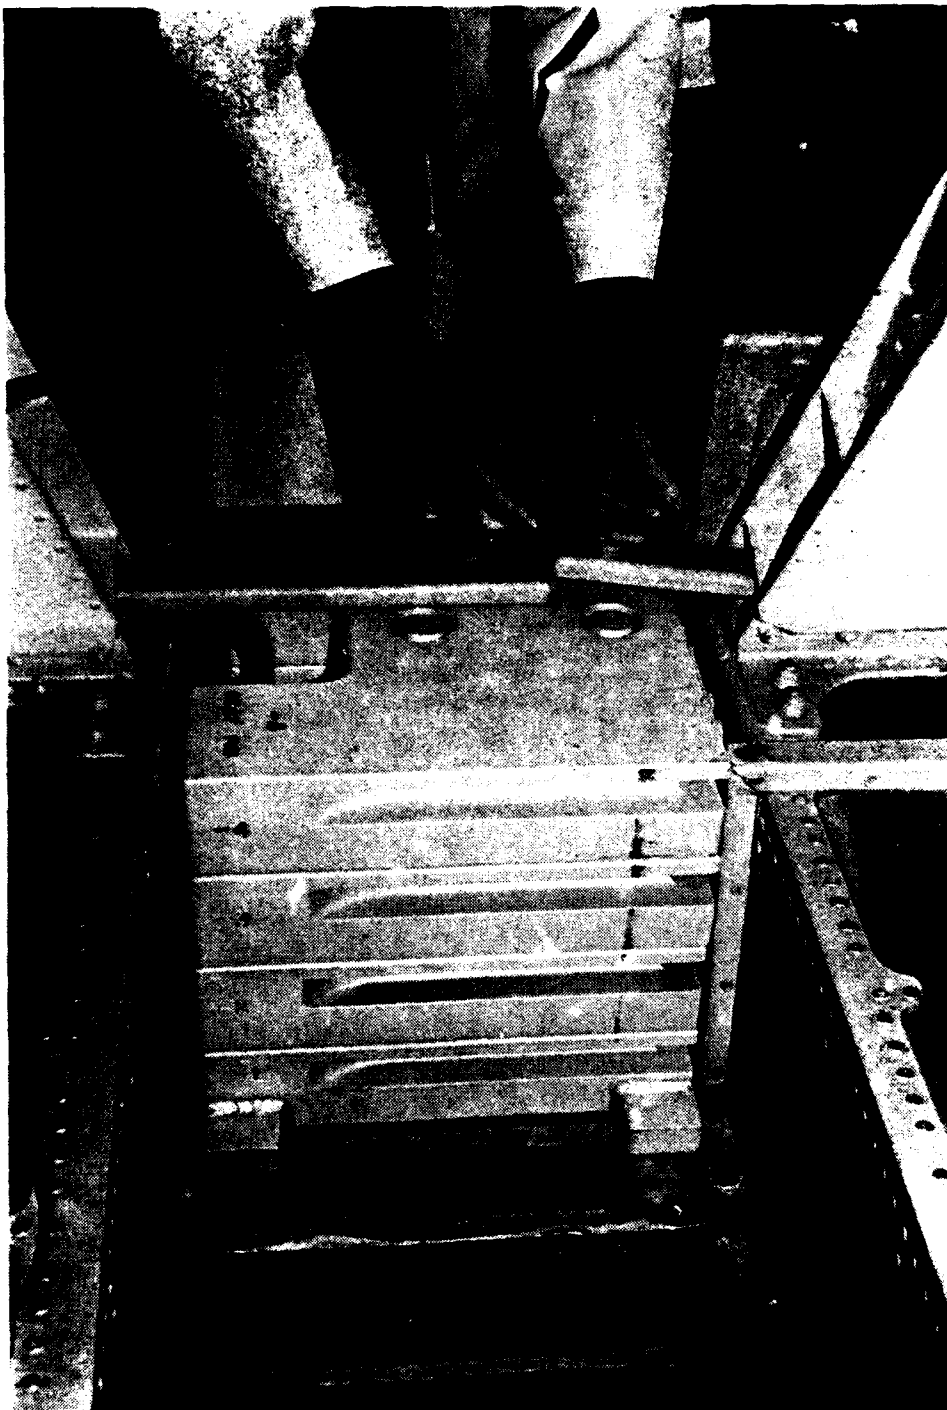


Figure 18. Lock Plates in Place



Figure 19. Wing Nuts on Locking Plates


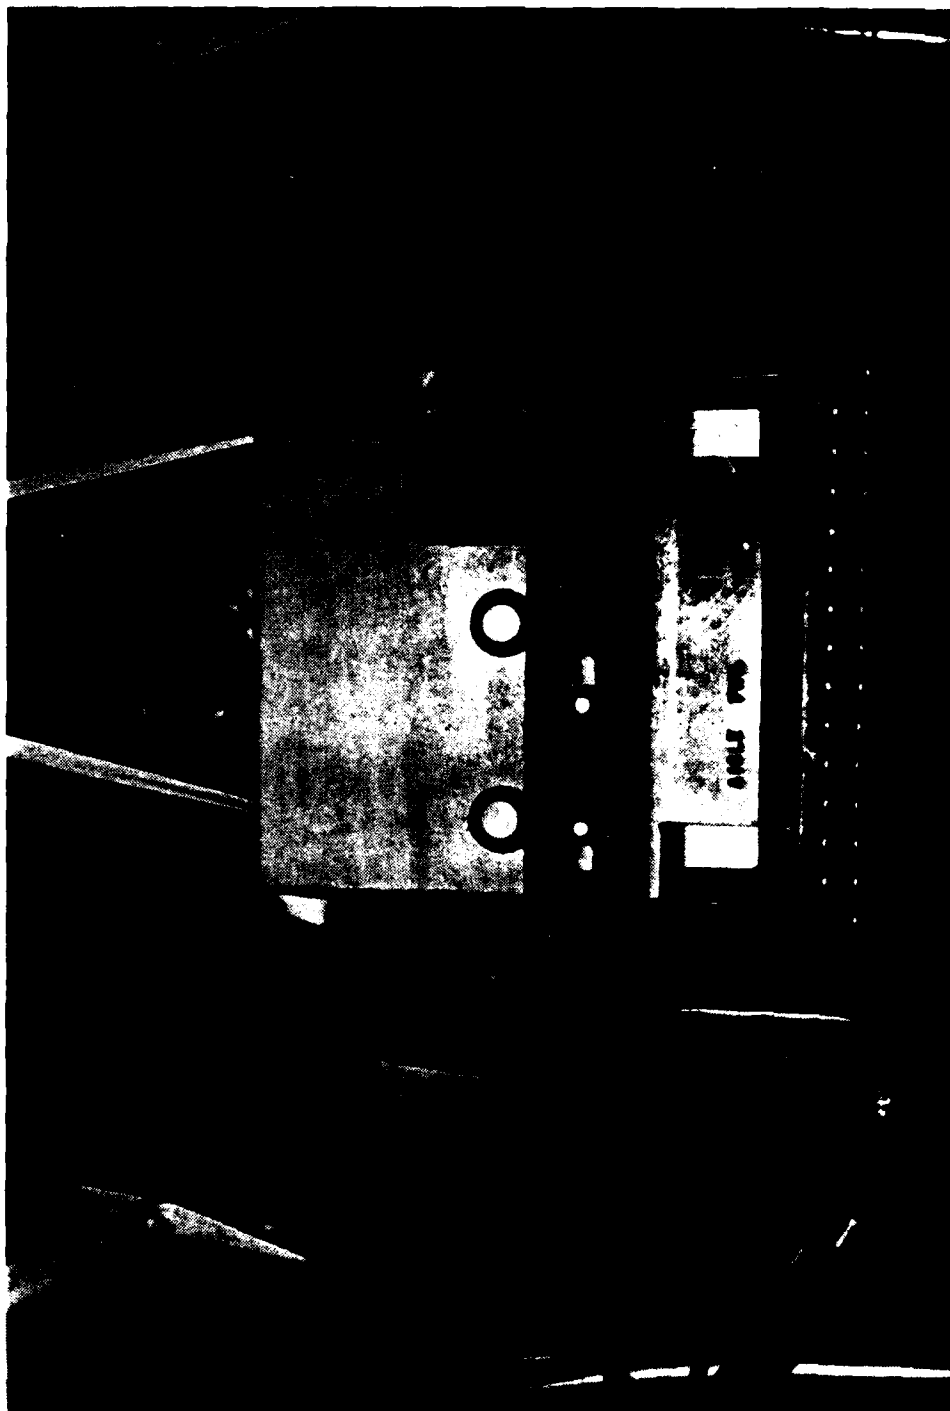



Figure 20. Top View of Assembly in Aisle

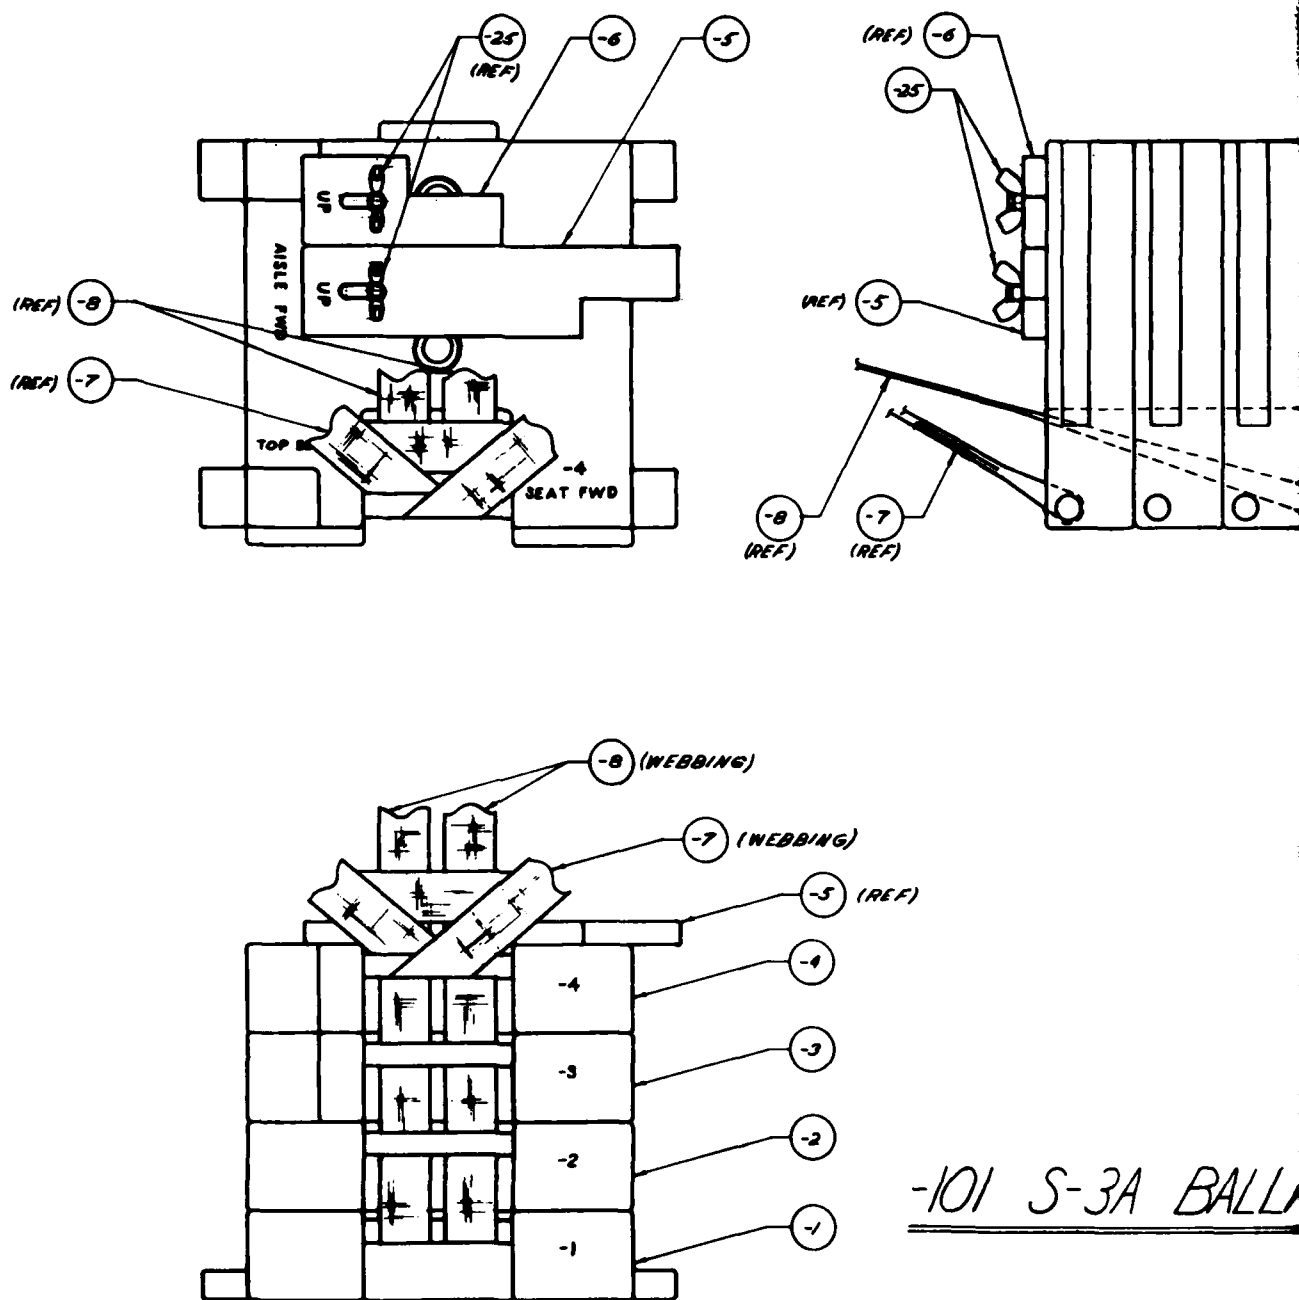

-101 S-3A BALL

Figure 21. Dwg, S-3A

NADC-84015-60

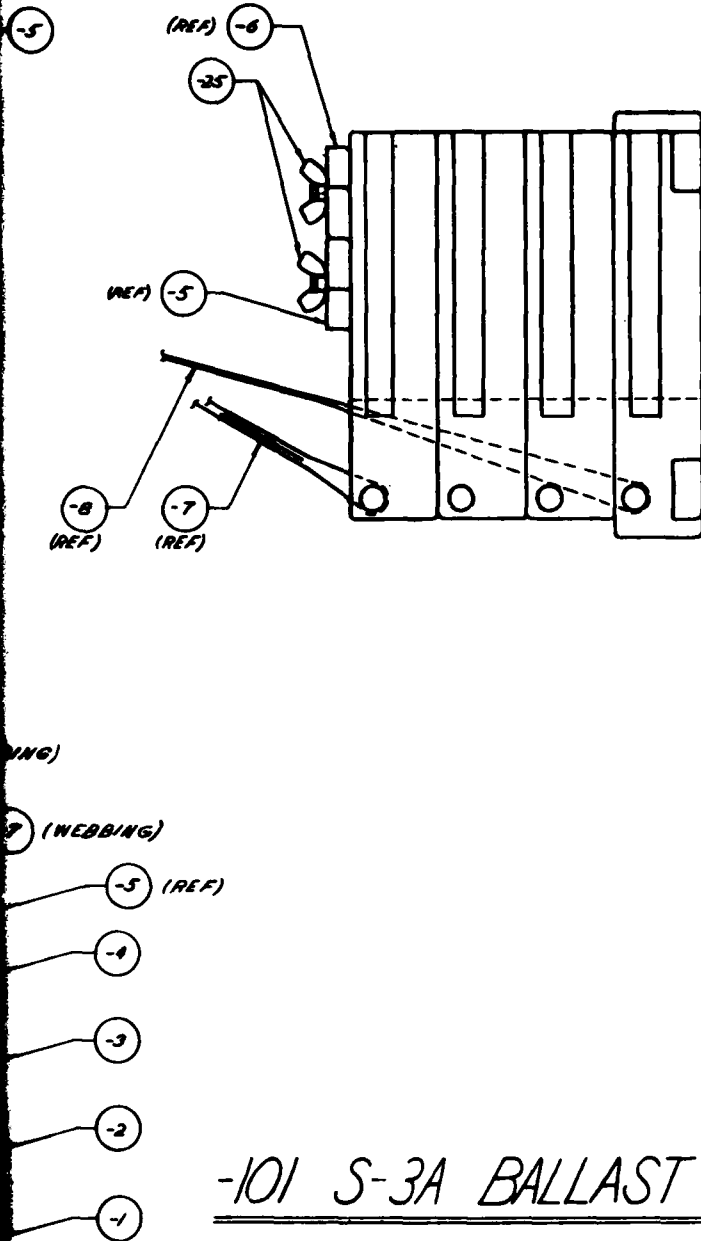


-101 S-3A BALLAST BLOCK ASSY.

2	-25	WING NUT	STEEL, CADMIUM PLAT.
2	-24	BOLT	STEEL, CADMIUM PLAT.
4	-22	TAB	6061-T651 ALUMINUM
4	-21	PLUG	
4	-20	HANDLE	
6	-19	POST	
1	-18	BLOCK	
1	-17	BLOCK	
1	-16	BLOCK	
1	-15	BLOCK	6061-T651 ALUMINUM
2	-14	SHOULDER HARNESS QUICK RELEASE FINE	
2	-13	LAP BELT QUICK RELEASE FITTING	
AR	-12	THREAD	NYLON, SAGE 6 6 CORD
2	-11	STRAP	NYLON, SAGE 6 WEBBING
1	-10	CROSS STRAP	
1	-9	STRAP	NYLON, SAGE 6 WEBBING
2	-8	SHOULDER HARNESS STRAP ASSY.	
1	-7	LAP BELT STRAP ASSY.	
1	-6	LOCKING PLATE	6061-T651 ALUMINUM
1	-5	LOCKING PLATE	6061-T651 ALUMINUM
1	-4	BLOCK ASSY.	
1	-3	BLOCK ASSY.	
1	-2	BLOCK ASSY.	
1	-1	BLOCK ASSY.	
		-101	S-3A BALLAST BLOCK ASSY.
NO. REQ'D	PART NO.	NAME OF PART	MATERIAL
LIST OF MATERIAL			
DATE: 10/1/84		DRAWN BY: J. J. JONES	
CHECKED BY: J. J. JONES		APPROVED BY: J. J. JONES	
NO. OF COPIES: 1		COPIES: 1	
REVISIONS:		REVISIONS:	

Figure 21. Dwg, S-3A Ballast Block, Assembly

NADC-84015-60

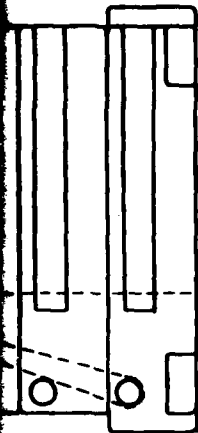


			REV 10/1983		
QTY	PART NO.	NAME OF PART	MATERIAL	SIZE	SPECIFICATION
2	-25	WING NUT	STEEL, CADMIUM PLATE	1/2 DIA	MS35426-18
2	-24	BOLT	STEEL, CADMIUM PLATE	1/2 DIA, 3 1/2 GRIP	AN-8-36
4	-22	TAB	6061-T651 ALUMINUM	1.00 x 1.50 x 2.00	
4	-21	PLUG		1/8 DIA x 1.00	
4	-20	HANDLE		3/4 DIA x 2.00	
6	-19	POST		1.500 DIA x 5.90	
1	-18	BLOCK		3.00 x 13.00 x 13.00	
1	-17	BLOCK			
1	-16	BLOCK		3.00 x 13.00 x 13.00	
1	-15	BLOCK	6061-T651 ALUMINUM	3.00 x 13.00 x 14.12	
2	-14	SHOULDER HARNESS QUICK RELEASE FITTING			MIL-D-71000-1 (NOCH)
2	-13	LAP BELT QUICK RELEASE FITTING			MIL-D-11766-1 (NOCH)
AR	-12	THREAD	NYLON, SAGE GRN 6 CORD		V-T-295 MIL-D-553-5211
2	-11	STRAP	NYLON, SAGE GRN WEBBING	1 1/2 x 54.0	MIL-W-4088 TY XIII
1	-10	CROSS STRAP		1 1/2 x 11.0	
1	-9	STRAP	NYLON, SAGE GRN WEBBING	1 1/2 x 44.0	MIL-W-4088 TY XIII
2	-8	SHOULDER HARNESS STRAP ASSY.			
1	-7	LAP BELT STRAP ASSY.			
1	-6	LOCKING PLATE	6061-T651 ALUMINUM	.75 x 3.00 x 6.75	
1	-5	LOCKING PLATE	6061-T651 ALUMINUM	.75 x 3.00 x 2.75	
1	-4	BLOCK ASSY.			
1	-3	BLOCK ASSY.			
1	-2	BLOCK ASSY.			
1	-1	BLOCK ASSY.			
	-101	S-3A BALLAST BLOCK ASSY.			

LIST OF MATERIALS

PREPARED BY: [Signature] CHECKED BY: [Signature] DATE: 10/1983		MILITARY AIR DEVELOPMENT CENTER WRIGHT-PATTERSON AFB, OH 45433	
PART NAME: S-3A BALLAST BLOCK ASSEMBLY		PART NO: 80206 S3ABB4/1	
QUANTITY: 1		UNIT: 1	

g, S-3A Ballast Block, Assembly

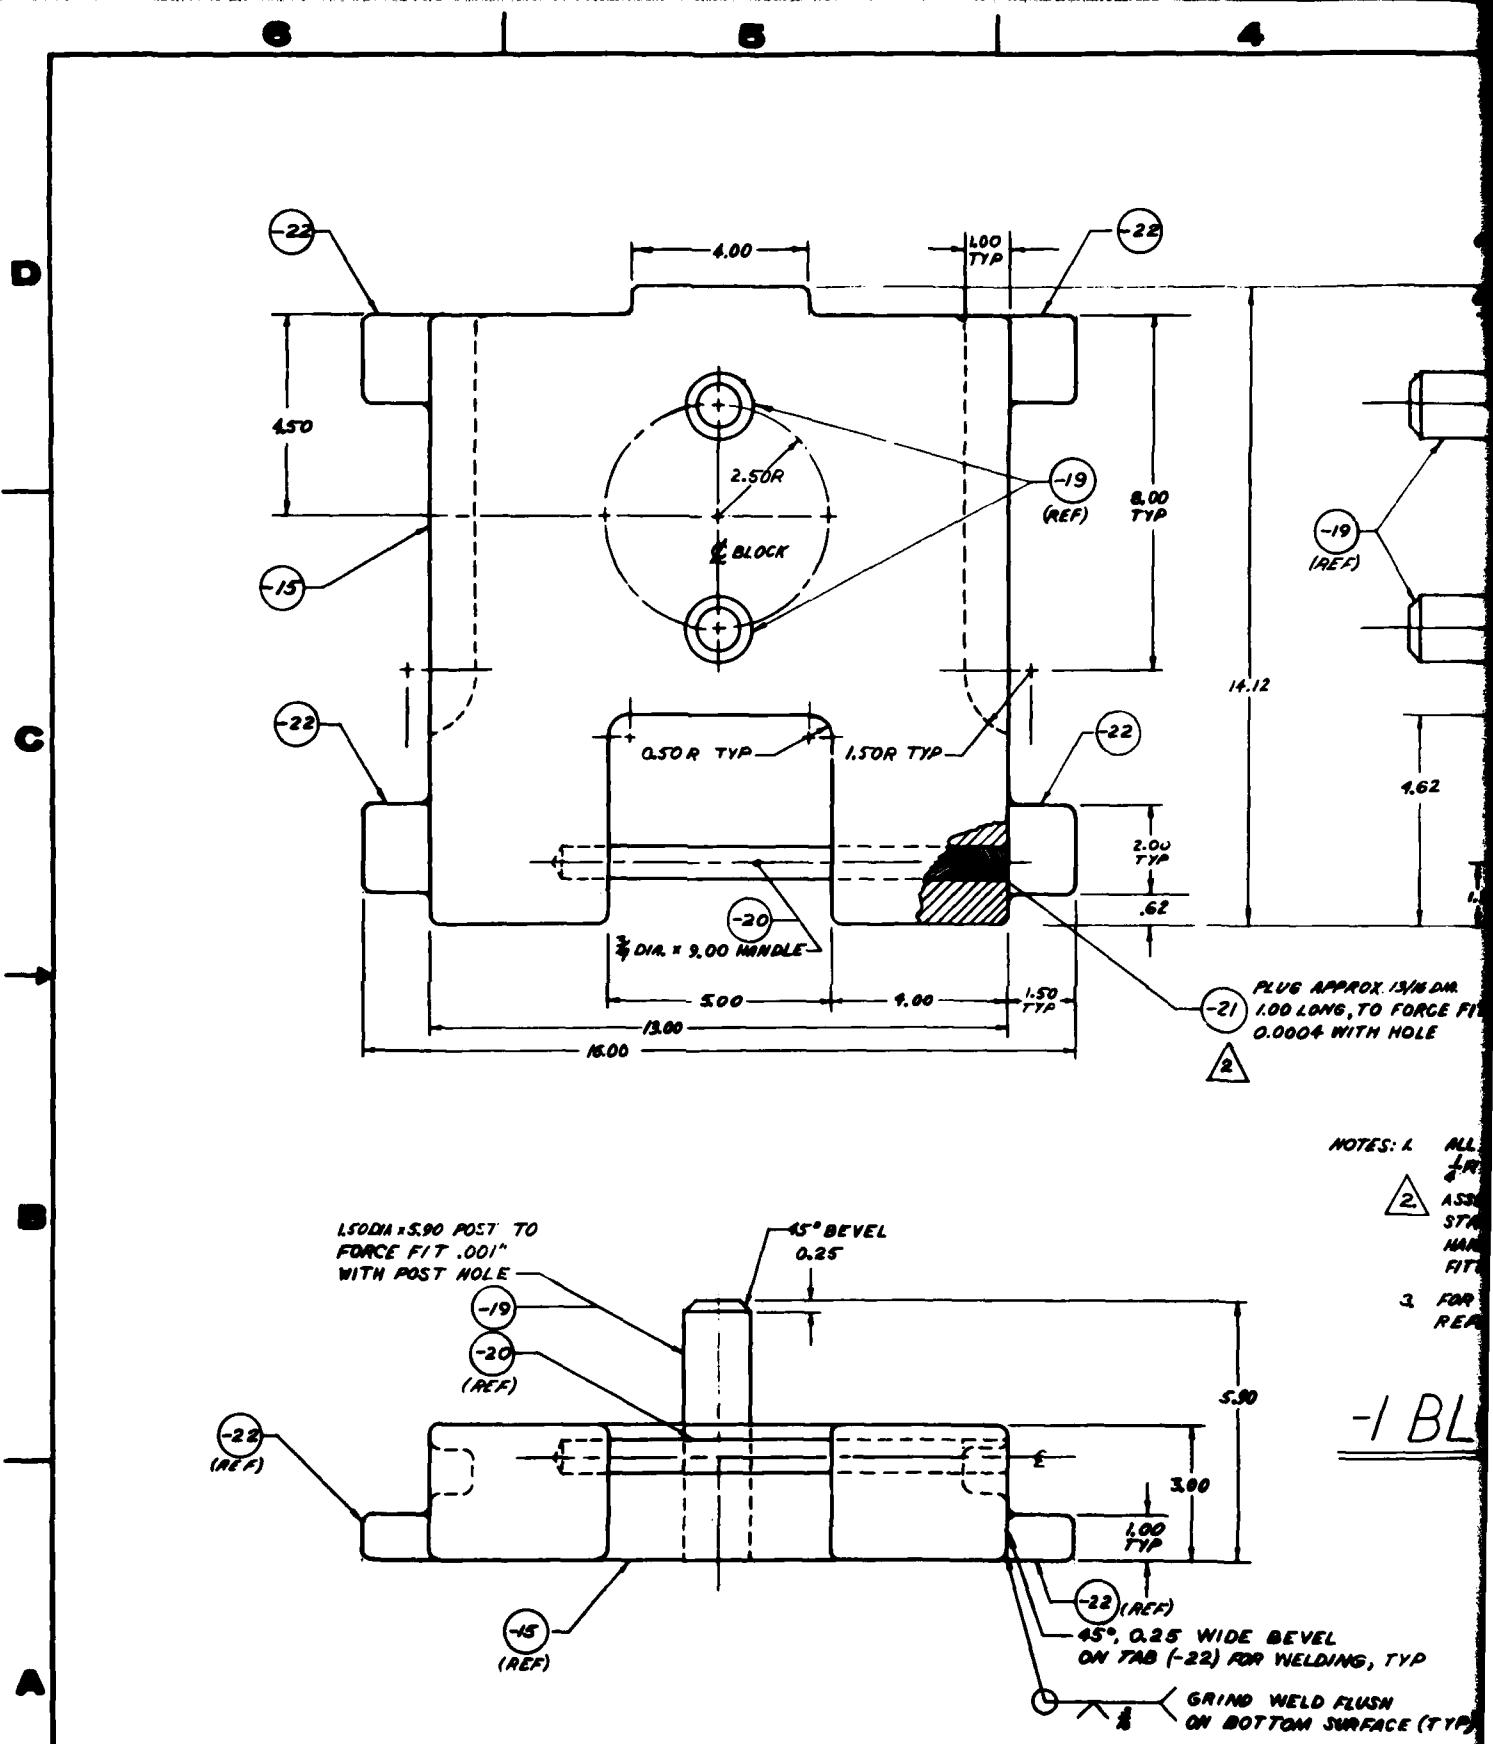


NOTES: 1 ALL
 2 ASSY
 STA
 MAN
 FIT
 3 FOR
 REA

-1 BL

Figure 22. Dwg. S-3

NADC-84015-60

ZONE	LWB

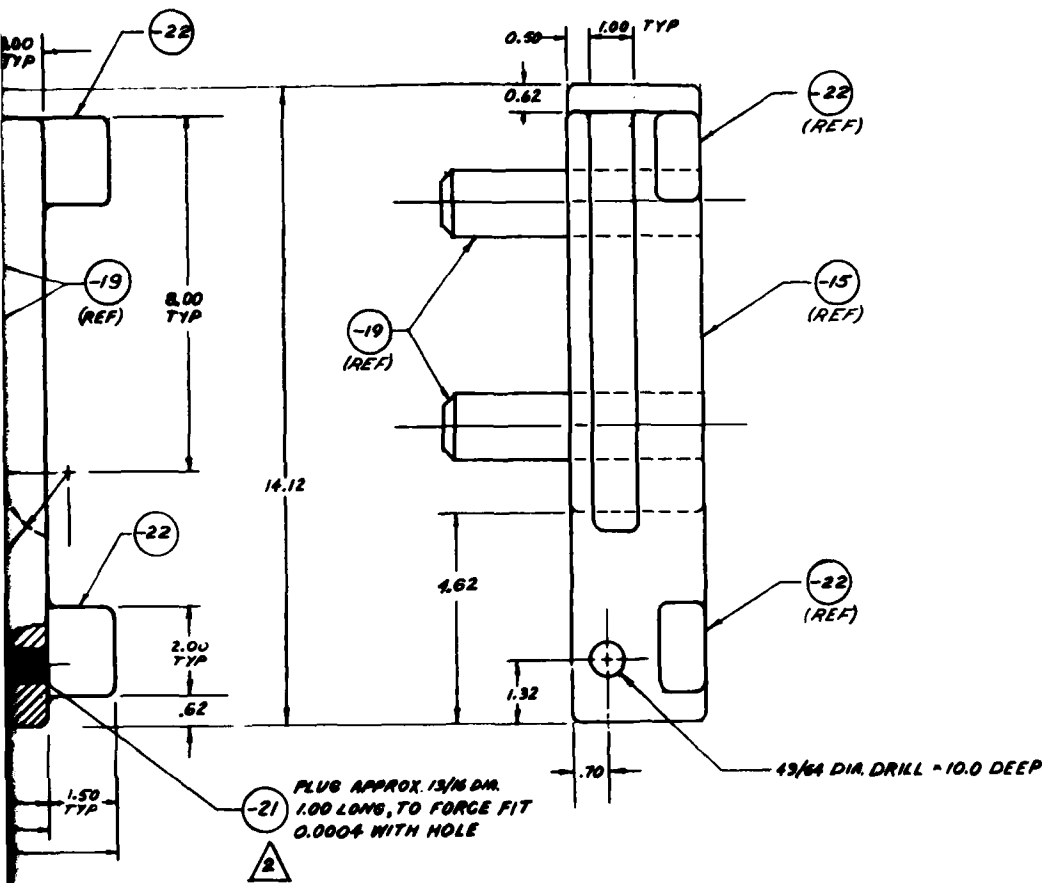

- NOTES: 1 ALL EDGES AND CORNERS HAVE $\frac{1}{8}$ R UNLESS OTHERWISE STATED.
- 2 ASSEMBLE TWO SHOULDER HARNESS STRAP ASSYS. (-8) AROUND HANDLE (-20) BEFORE FORCE FITTING PLUG (-21) INTO HOLE.
- 3 FOR CHARACTER STAMPING DETAIL, REFER TO SHEET 8.

-1 BLOCK ASSY.


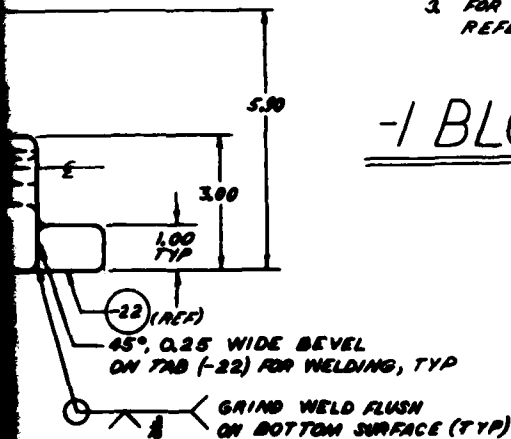


Figure 22. Dwg, S-3A Ballast Block, -1 Block

PART NAME: BALLAST BLOCK DRAWN BY: J. L. HARRIS CHECKED BY: J. L. HARRIS DATE: 10/1/60		QUANTITY: 100 ORDERED: 100 DATE: 10/1/60		S-3A -1
MATERIAL: 6061-T6 ALUMINUM FINISH: GRAY ANODIZE MIL-A-8888		PRICE: \$1.00 TOTAL: \$10.00		
BY: J. L. HARRIS DATE: 10/1/60		BY: J. L. HARRIS DATE: 10/1/60		
BY: J. L. HARRIS DATE: 10/1/60		BY: J. L. HARRIS DATE: 10/1/60		

NADC-84015-60

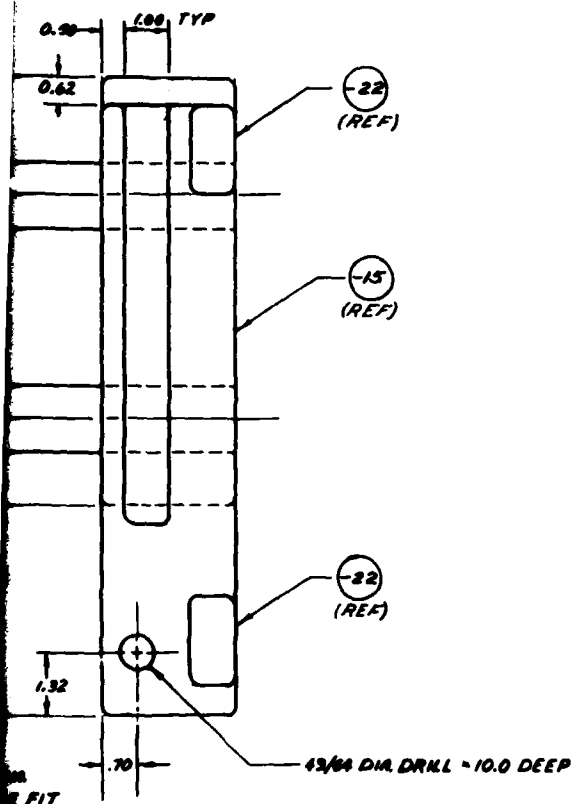

ALL EDGES AND CORNERS HAVE
 $\frac{1}{8}$ R UNLESS OTHERWISE STATED.
 ASSEMBLE TWO SHOULDER HARNESS
 STRAP ASSYS. (-8) AROUND
 HANDLE (-20) BEFORE FORCE
 FITTING PLUG (-21) INTO HOLE.
 FOR CHARACTER STAMPING DETAIL,
 REFER TO SHEET 0.

LOCK ASSY.



S-3A Ballast Block, -1 Block

31

DRAWN BY: J. H. HARRIS CHECKED BY: J. H. HARRIS DATE: 11/1/60		AIR FORCE AIR DEVELOPMENT CENTER WRIGHT-PATTERSON AFB, OHIO	
TITLE: S-3A BALLAST BLOCK PART NO.: 80206		S-3A BALLAST BLOCK -1 BLOCK	
MATERIAL: 6061-T6 ALUMINUM FINISH: GRAY ANODIZE MIL-A-8885		QTY: 1	QTY: 1
QTY: 1		QTY: 1	QTY: 1

3

D
C
B
A

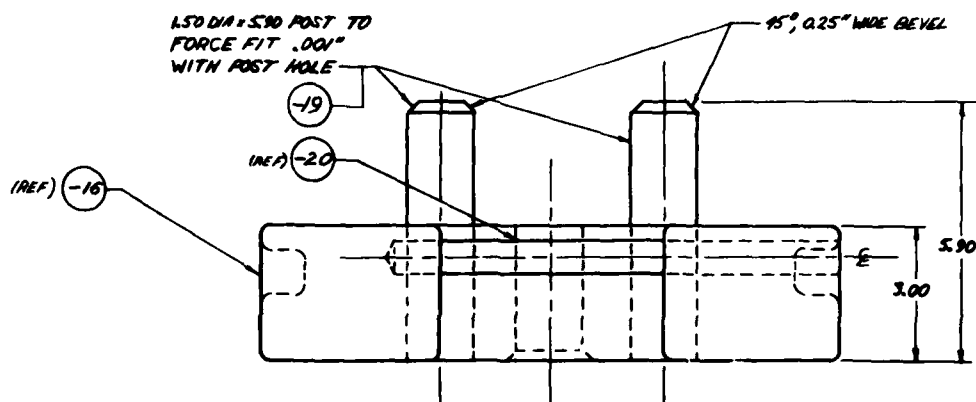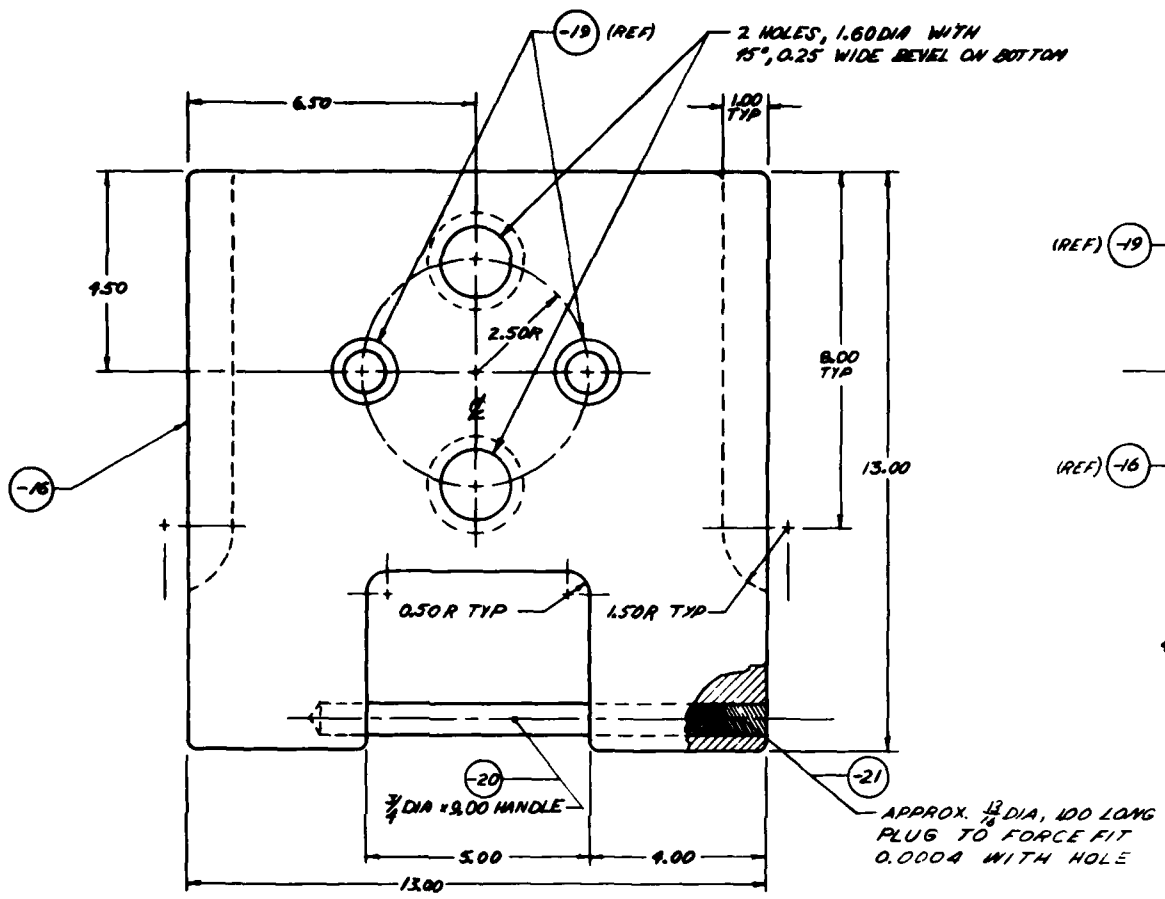

NOTES: 1. NO
2. 1/8
3. 5. F
4. RE


-2 B

Figure 2

NADC-84015-60


DATE LTR

2 HOLES, 1.60 DIA WITH
15°, 0.25 WIDE BEVEL ON BOTTOM

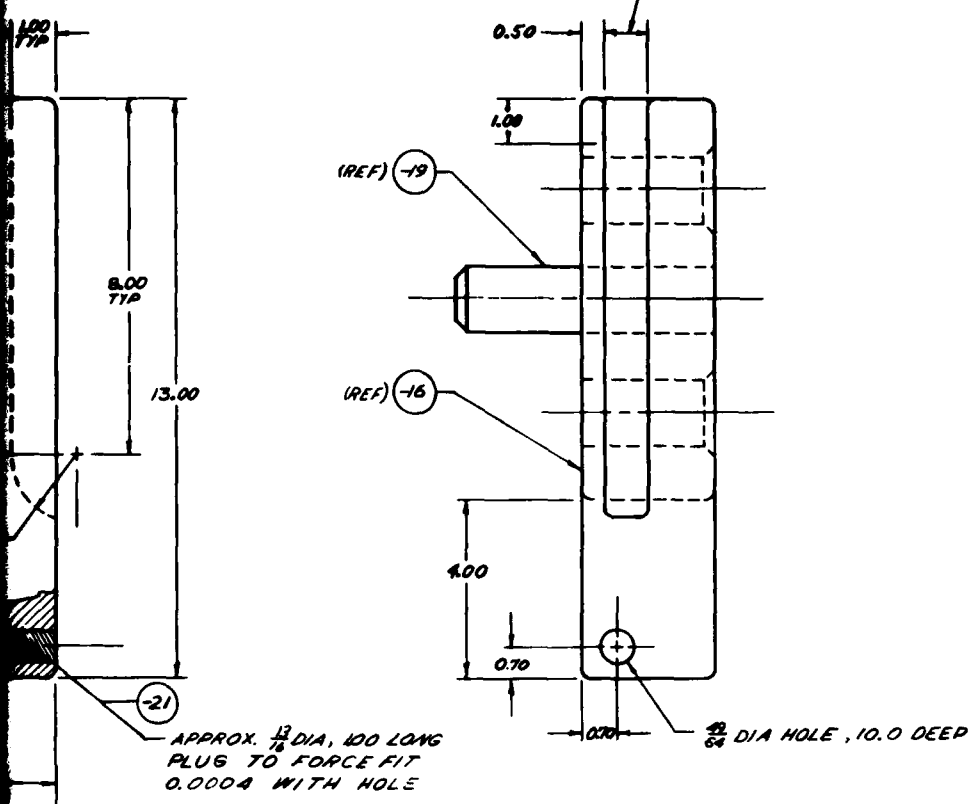

NOTES: 4 ALL EDGES AND CORNERS HAVE
1/4 R UNLESS OTHERWISE STATED.
5. FOR CHARACTER STAMPING DETAIL,
REFER TO SHEET B.

0.25" WIDE BEVEL




-2 BLOCK ASSY.

Figure 23. Dwg, S-3A Ballast Block, -2 Block

2

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES 1 PLACE 2 PLACE 3 PLACE 4 PLACE 5 PLACE 6 PLACE 7 PLACE 8 PLACE 9 PLACE 10 PLACE		CONTRACT NO.	
DO NOT SCALE THIS DRAWING		DATE	10/24/78
MATERIAL: 6061-T851 ALUMINUM		DESIGNED BY	G. J. ...
FINISH: GRAY ANODIZE MIL-A-8625		APPROVED	
		REVISION	

NADC-84015-60

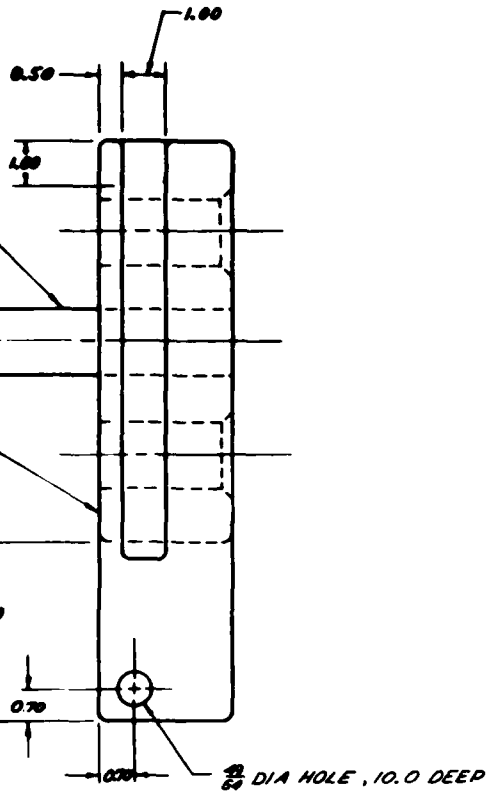

ALL EDGES AND CORNERS HAVE
FR UNLESS OTHERWISE STATED.
FOR CHARACTER STAMPING DETAIL,
REFER TO SHEET B.

BLOCK ASSY.

23. Dwg, S-3A Ballast Block, -2 Block

32

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS 1/16" ANGLES 2° 3 PLACE DECIMALS 0.001 4 PLACE DECIMALS 0.0001		CONTRACT NO.		NAVAL AIR DEVELOPMENT CENTER WARRINGTON, PA. 16974	
DO NOT SCALE THIS DRAWING		DESIGN	S-3A BALLAST BLOCK -2 BLOCK		
MATERIAL: 6061-T651 ALUMINUM		ENGINEER	G. J. [Signature]		
FINISH: GRAY ANODIZE MIL-A-8625		APPROVED	DATE: 80206		
		APPROVED	WEEK: S3ABB4/3		
		SCALE: 1/2"	SHEET 3 of 8		

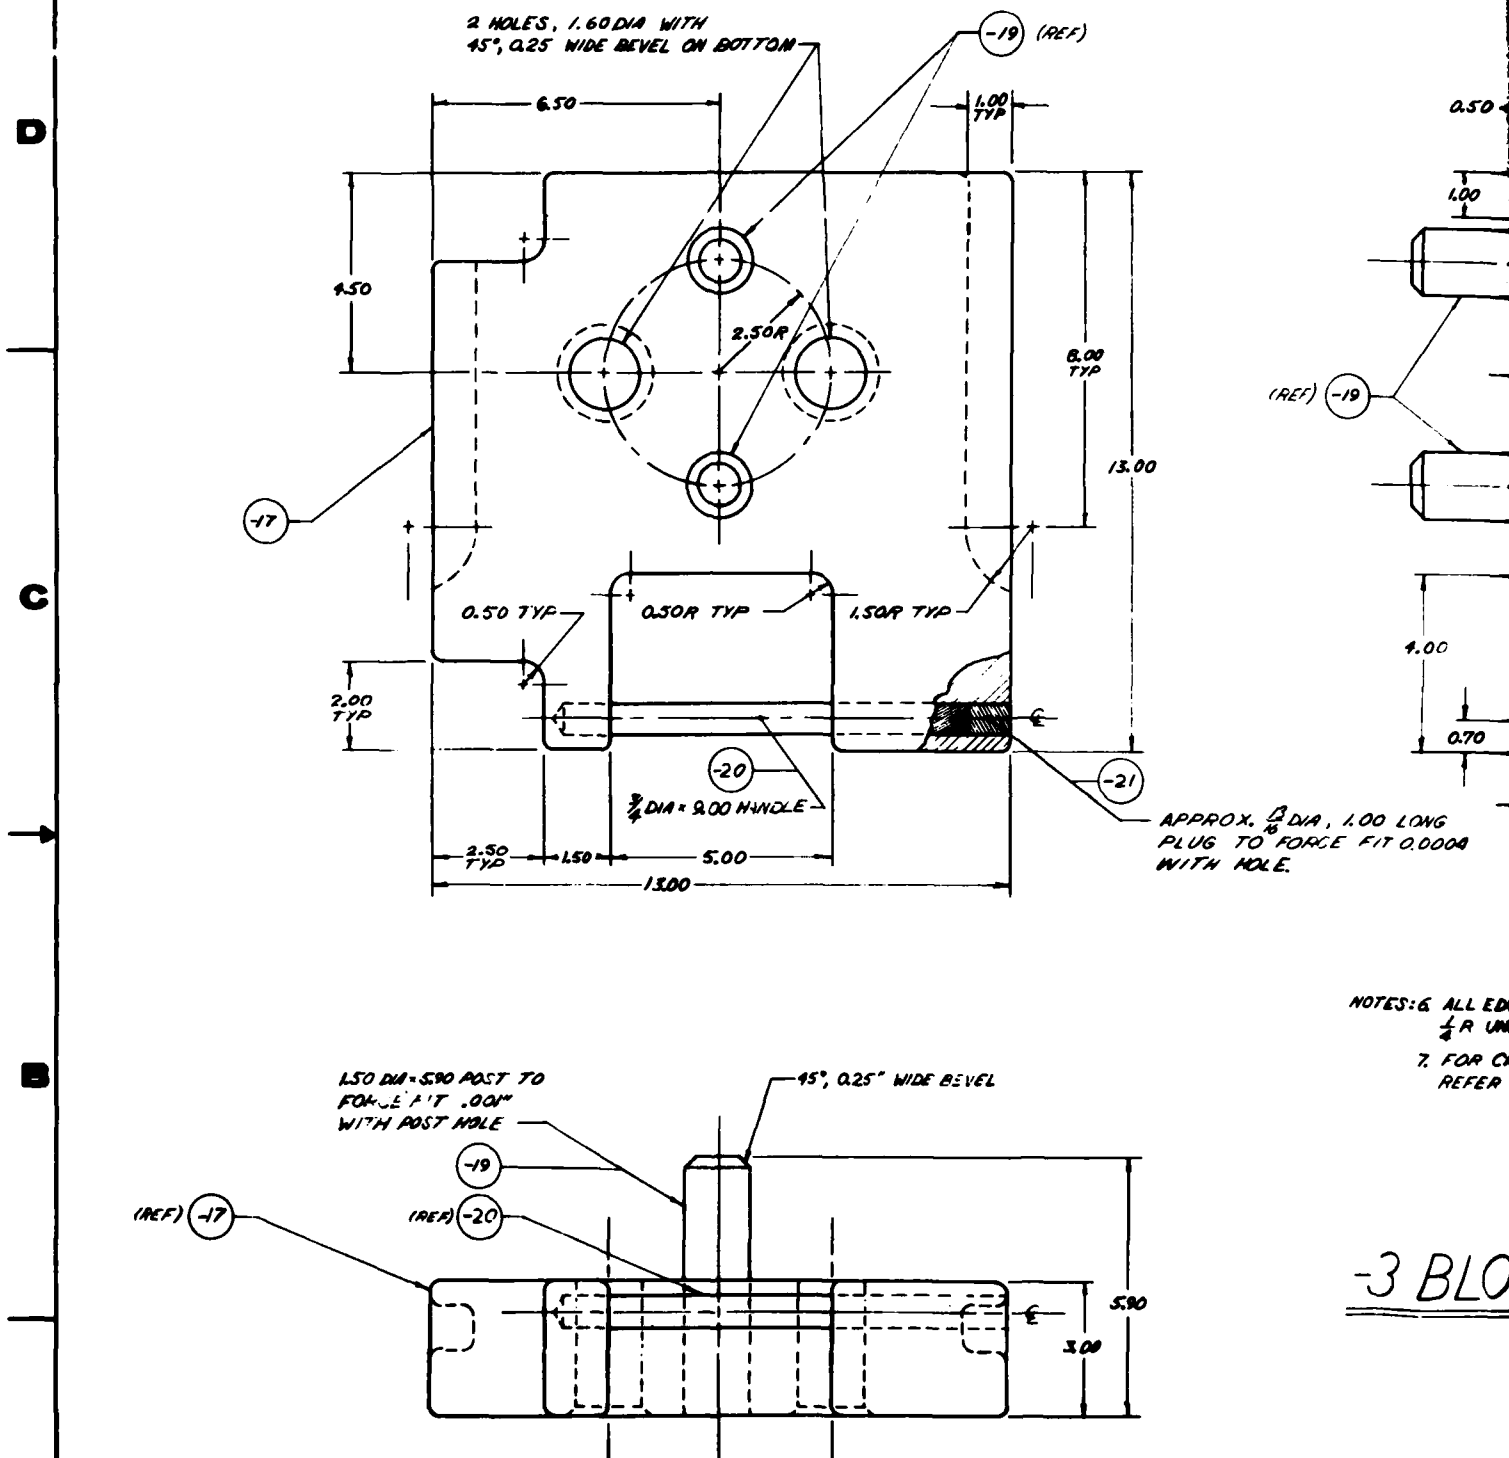



Figure 24. Dwg, S-3A B



Figure 24. Dwg, S-3A Ballast Block, -3 Block

100% CEMENT PORTLAND WEIGHTS IN POUNDS VOLUMES IN GALLONS FLYING 8 ANGLE 2 1 PLANT DISTANCE 2 1 PLANT DISTANCE 2 .01	CONTACT NO.
DO NOT SHAKE THIS MIXTURE IMPROPERLY! 6061-T651 ALUMINUM FINISH: GRAY ANODIZE MIL-A-8625	GRADE 7075-T6 QUANTITY 2.5000 PRICE TOTAL TAXES TOTAL

C-84015-60

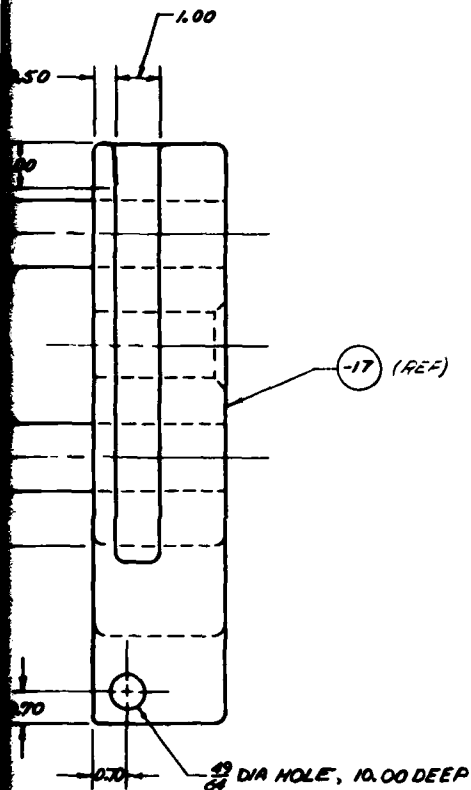

ALL EDGES AND CORNERS HAVE
A UNLESS OTHERWISE STATED.
FOR CHARACTER STAMPING DETAIL,
REFER TO SHEET B.

LOCK ASSY.

A Ballast Block, -3 Block

33

REVISIONS				
DATE	LYR	DESCRIPTION	DATE	APPROVED


PART NUMBER: C-84015-60 QUANTITY: 1 1 PLACE DIMENSIONS: .01		DRAWN: [Signature] CHECKED: [Signature] APPROVED: [Signature]		BAWL AIR DEVELOPMENT CENTER WASHINGTON, PA. 15064	
DO NOT SCALE THIS DRAWING MATERIAL: 6061-T651 ALUMINUM FINISH: GRAY ANODIZE MIL-A-8625		S-3A BALLAST BLOCK -3 BLOCK		PART NO. 80206 REV. 1/2 S3ABB4/4	

D


C

A

3

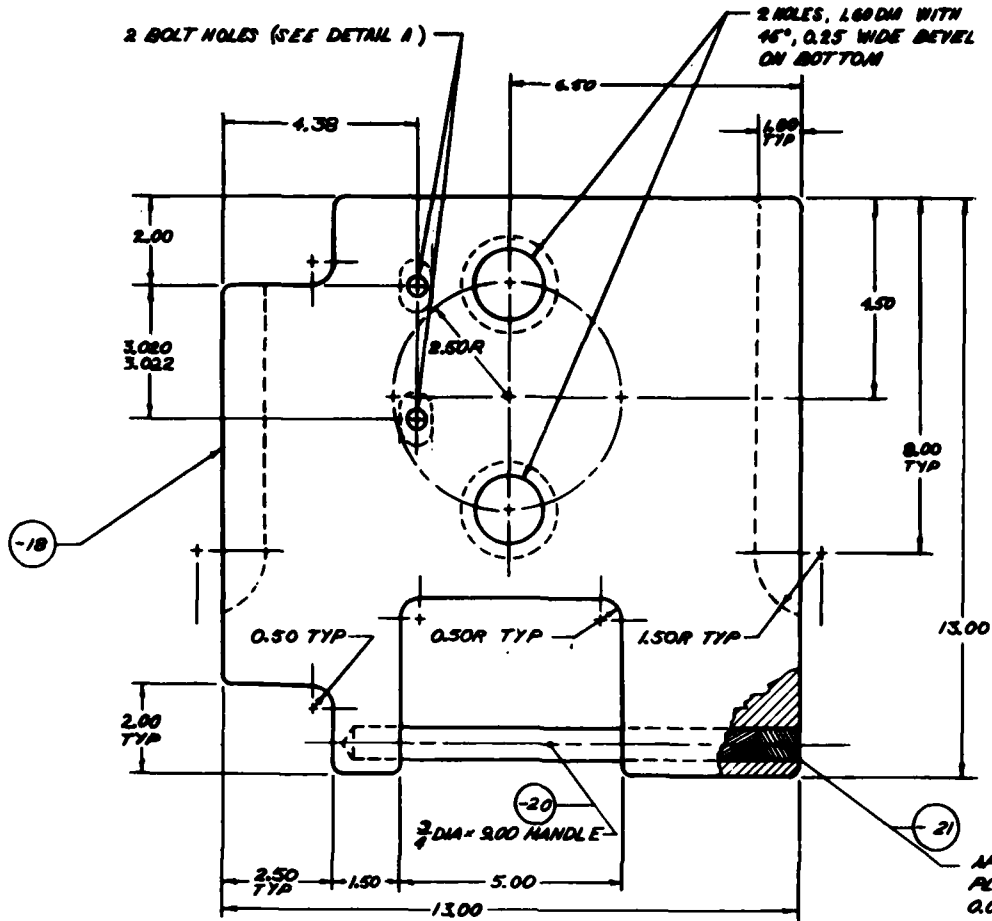

- NOTES: 8. ALL ED HAVE 1/16" CHAMFER STATED
9. ASSEMBLY AROUND FORCE INTO M
10. APPLY 1/2 BOLT M
11. FOR CH TO SHEET

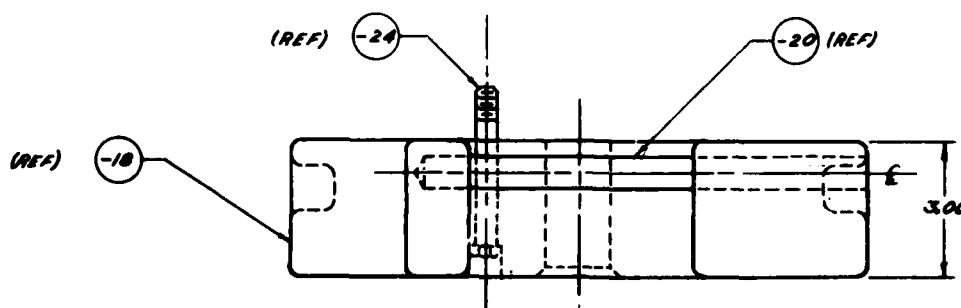

-4 BLOC

Figure 25. Dwg, S-3A Ball

[illegible]


3

2


1

DC-84015-60

REVISIONS				
ZONE	LTG	DESCRIPTION	DATE	APPROVED

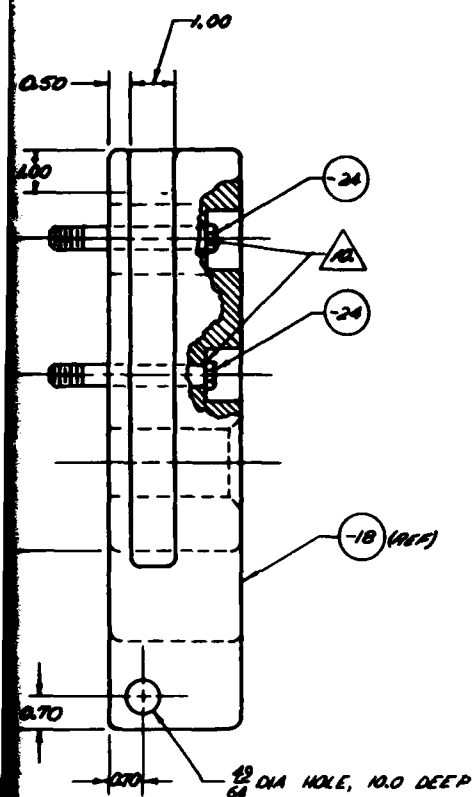

COUNTERSINK DETAILS

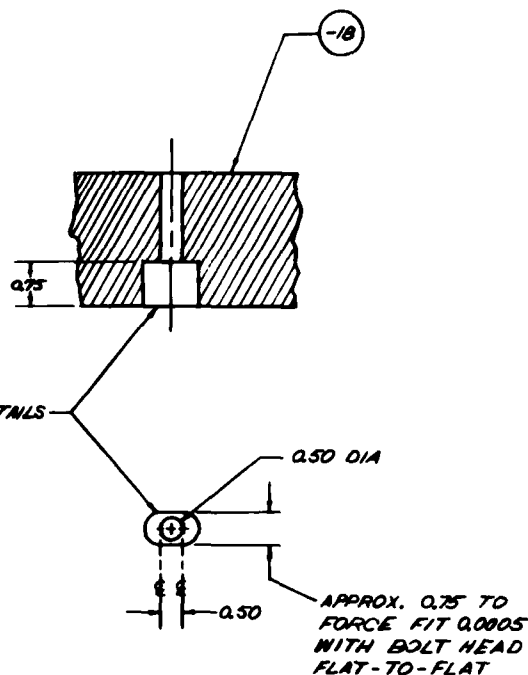DETAIL A: BOLT HOLE

ALL EDGES AND CORNERS HAVE $\frac{1}{8}$ R UNLESS OTHERWISE STATED.

ASSEMBLE LABELT ASSY (-7) AROUND HANDLE (-20) BEFORE FORCE FITTING PLUG (-21) INTO HOLE.

APPLY $\frac{1}{8}$ IN. OF "LOCTITE" CEMENT BELOW BOLT HEAD BEFORE INSERTING BOLT.

FOR CHARACTER STAMPING DETAIL, REFER TO SHEET 8.

BLOCK ASSY.

3A Ballast Block, -4 Block

34

QUALITY CONTROL SPECIFICATIONS CONTRACT NO. PART NO. 1 1 PLATE DETAIL A - 1.00 1 PLATE DETAIL B - 1.00		RAND AIR DEVELOPMENT CENTER WASHINGTON, PA. 15074	
DO NOT SCALE THIS DRAWING 6061-T661 ALUMINUM FINISH: GRAY ANODIZE MIL-A-8625		S-3A BALLAST BLOCK -4 BLOCK	
DESIGNED BY: J. QUARTUCCIO CHECKED BY: J. QUARTUCCIO APPROVED BY: J. QUARTUCCIO DATED: 10/1/60		QTR NO. 1 80206	QTR NO. 2 S3ABB4/5
SCALE: 1" = 1"		DATE: 10/1/60	BY: J. QUARTUCCIO

D

C

A

3

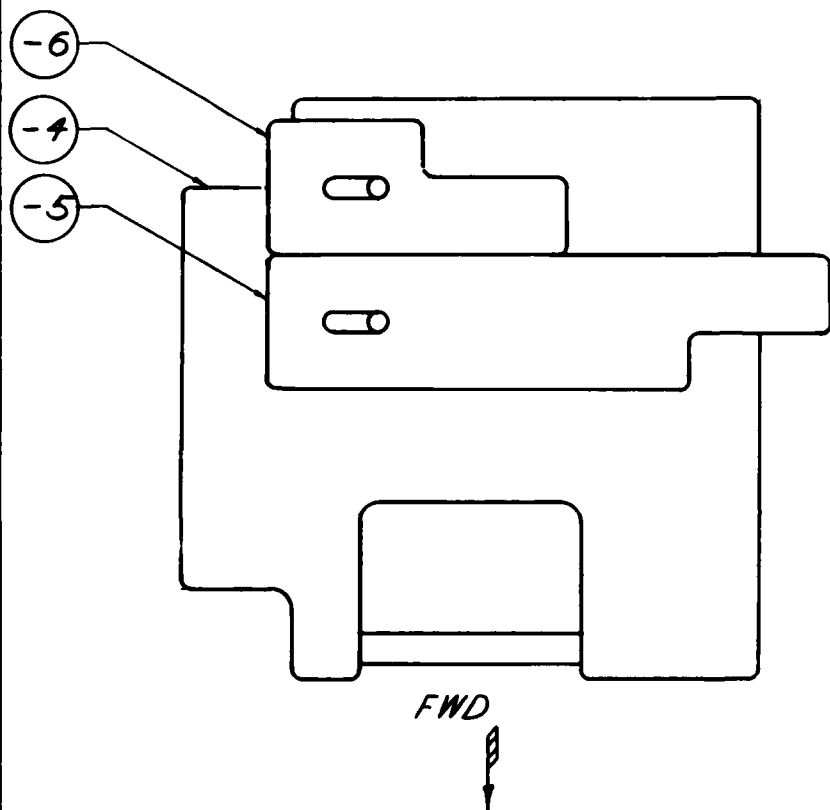


PLATE ORIENTATION IN SEAT

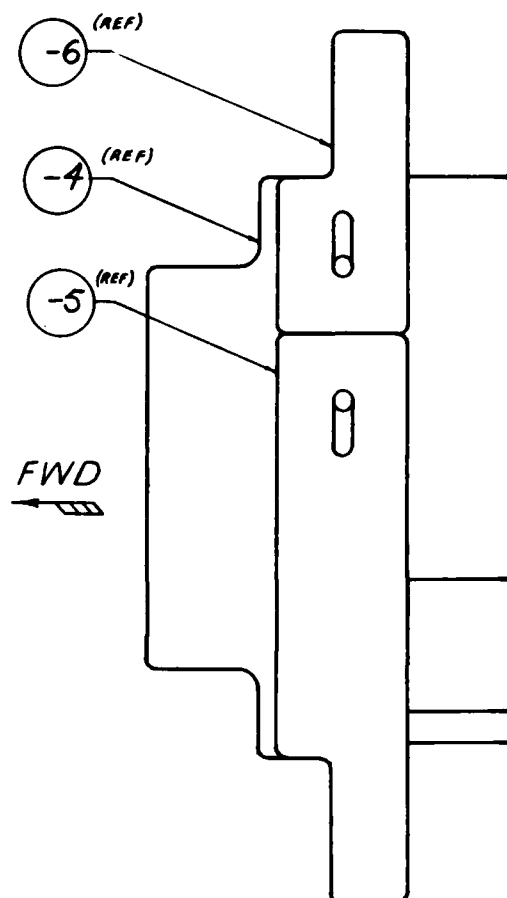


PLATE ORIENTATION

Figure 26. Dwg, S-3A Ballast Block

NADC-84015-60


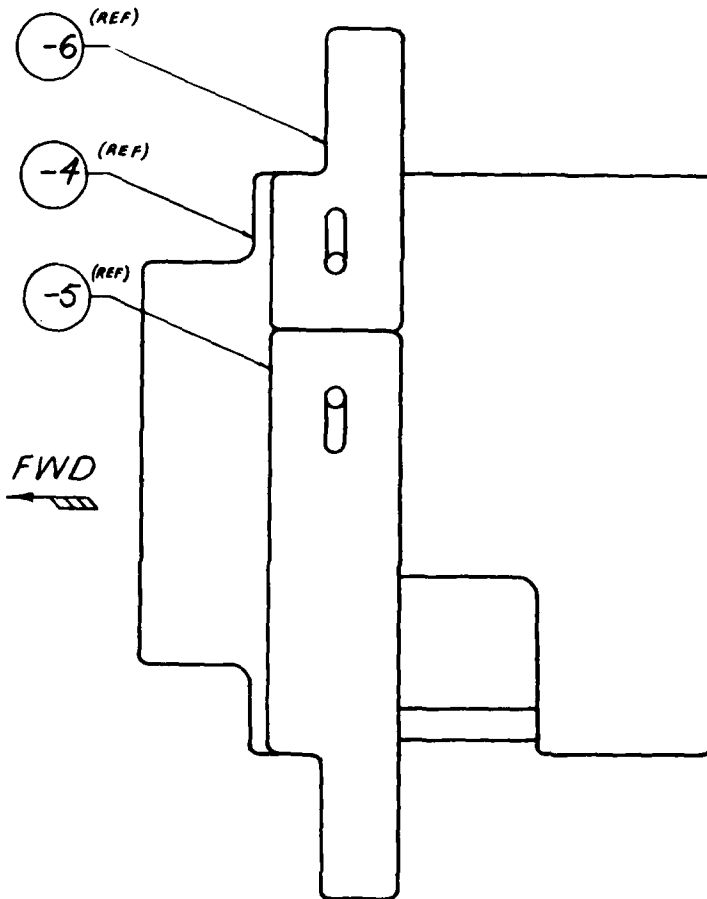


PLATE ORIENTATION IN AISLEWAY

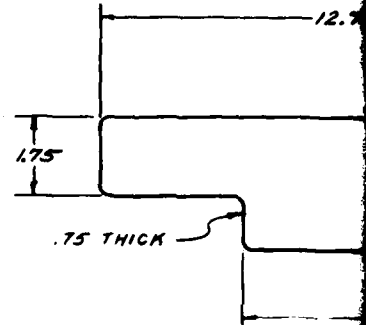

NOTES: 12. ALL OUTER CORNERS AND EDGES HAVE $\frac{1}{4}R$
13. SLOT EDGES HAVE $\frac{1}{16}$
14. FOR CHARACTER STAMPING REFER TO SHEET B.

-5 LOCKING PL


NOTES: 15. ALL OUTER CORNERS EDGES HAVE $\frac{1}{4}R$
16. SLOT EDGES HAVE $\frac{1}{16}$
17. FOR CHARACTER STAMPING REFER TO SHEET B.

-6 LOCKING PL

Figure 26. Dwg, S-3A Ballast Block, Aisle Locking Plate

DATE: 10/10/84 DRAWN BY: [Signature] CHECKED BY: [Signature] IN THE NAME OF THE ENGINEER: [Signature]	QUANTITY: 100
PART NAME: A 1. PART NUMBER: 1000000000 2. PART NUMBER: 1000000000	STATUS: []
DO NOT SCALE THIS DRAWING (ORIGINAL)	STATUS: []
6061-T6 ALUMINUM	STATUS: []
FINISH:	STATUS: []
GRAY ANODIZE MIL-A-8625	STATUS: []

DC-84015-60

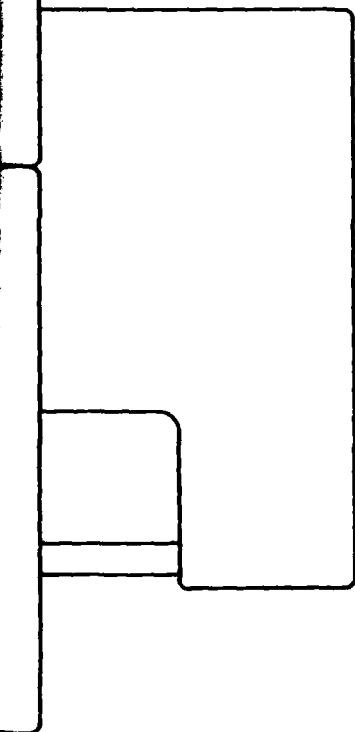

STATION IN AISLEWAY

Ballast Block, Aisle Locking Plate

3		2		1	
REVISIONS					
DATE	LTH	DESCRIPTION	DATE	APPROVED	
NOTES: 12. ALL OUTER CORNERS AND EDGES HAVE $\frac{1}{4}R$ 13. SLOT EDGES HAVE $\frac{1}{16}R$ 14. FOR CHARACTER STAMPING DETAIL, REFER TO SHEET B. <u>-5 LOCKING PLATE DETAIL</u>					
NOTES: 15. ALL OUTER CORNERS AND EDGES HAVE $\frac{1}{4}R$ 16. SLOT EDGES HAVE $\frac{1}{16}R$ 17. FOR CHARACTER STAMPING DETAIL, REFER TO SHEET B. <u>-6 LOCKING PLATE DETAIL</u>					
DESIGNED BY: [blank] CHECKED BY: [blank] DATE: [blank] 6061-T6 ALUMINUM FINISH: GRAY ANODIZE MIL-A-8625		REWORK BY: [blank] CHECKED BY: [blank] DATE: [blank] 6061-T6 ALUMINUM FINISH: GRAY ANODIZE MIL-A-8625		NAVAL AIR DEVELOPMENT CENTER WRIGHT-PATTERSON AFB, OHIO 45433 S-3A BALLAST BLOCK AISLE LOCKING PLATES DATE: 1 80206 DESIGNED BY: S3ABB4/6 CHECKED BY: [blank]	

D
C
A
3

NOTES:

12. MATERIALS (REPEATED FROM SHEET 1):

PART NO.	NO. REQD. PER ASSY.	DESCRIPTION	SIZE	MATERIAL	SPECIFICATION
-9	1	LAP BELT STRAP - ONE CONTINUOUS STRAP, LOOPED BACK ON ITSELF	1 3/4" x 44	NYLON, SAGE GRN WEBBING	MIL-W-4088 TY XIII
-10	1	CROSS STRAP	1 3/4" x 11	" "	" "
-11	2	SHOULDER HARNESS STRAP	1 3/4" x 54	" "	" "
-12	AS REQUIRED	THREAD		NYLON SAGE GRN, 6 CORD	V-T-295 MILN 00-559-5211
-13	2	LAP BELT QUICK RELEASE FITTING			P/N DIS-11366-1 (NOCH)
-14	2	SHOULDER HARNESS QUICK RELEASE FITTING			P/N DIS-710001-1 (NOCH)

20. SEAR ENDS OF NYLON WEBBING TO PREVENT FRAYING, AVOID FORMING SHARP EDGES.

21. ALL STITCHING SHALL BE 4 TO 6 THREADS PER INCH.

22. STITCHING ALONG EDGE SHALL BE 1/8 IN. AWAY FROM EDGE OF WEBBING.

23. ALL STITCHING SHALL BE BACKSTITCH 1/2 MIN.

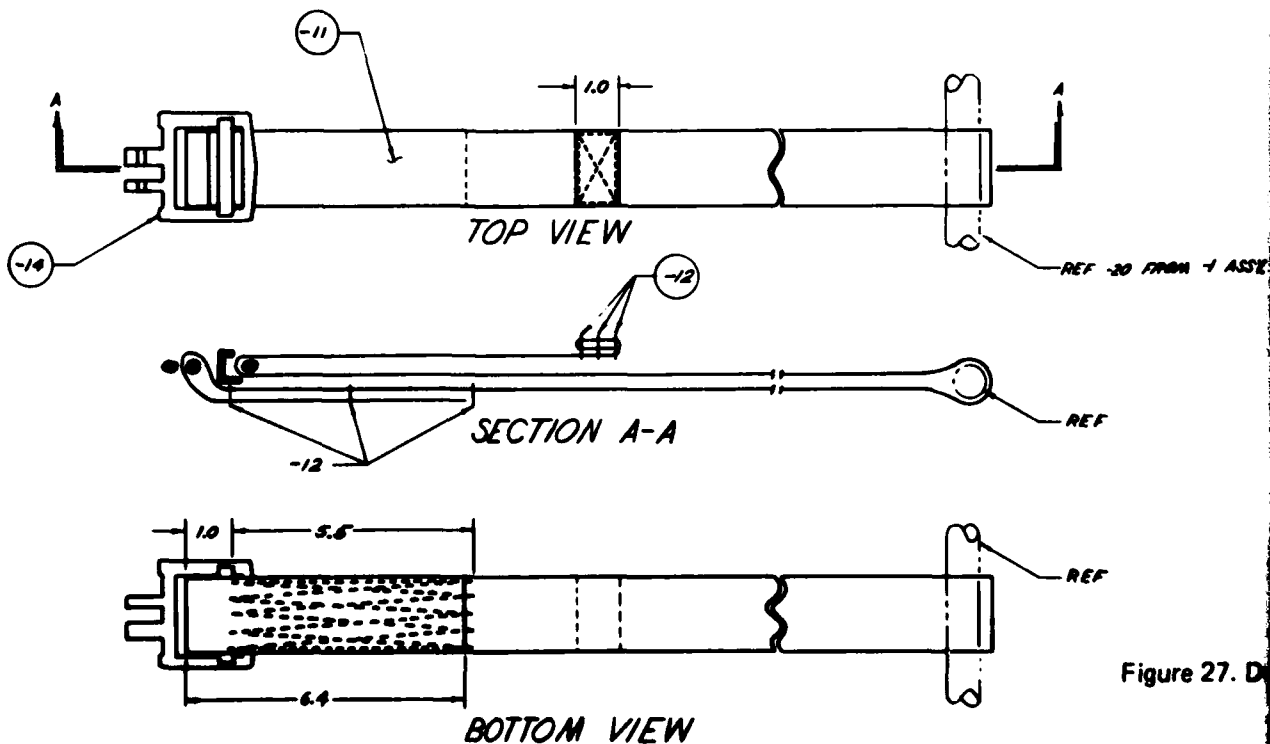



Figure 27. D

-8 SHOULDER HARNESS STRAP ASSY. (2 REQD)



MATERIAL	SPECIFICATION
WIRE, SAGE GRN, BR/NG	ML-W-4000 TY XIII
"	"
"	"
WIRE, SAGE GRN, BRD	V-T-295 MILN 00-559-5211
	P/N DIS-11366-1 (ROCK)
	P/N DIS-710001-1 (ROCK)

SHARP EDGES.

NADC-84015-60

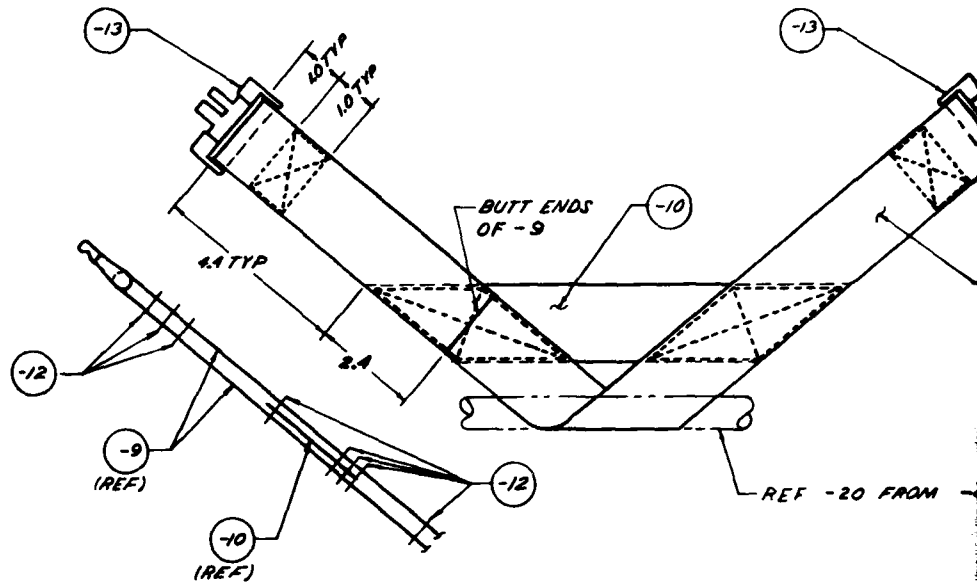

-7 LAP BELT STRAP ASS

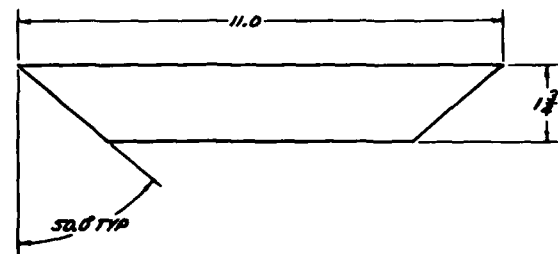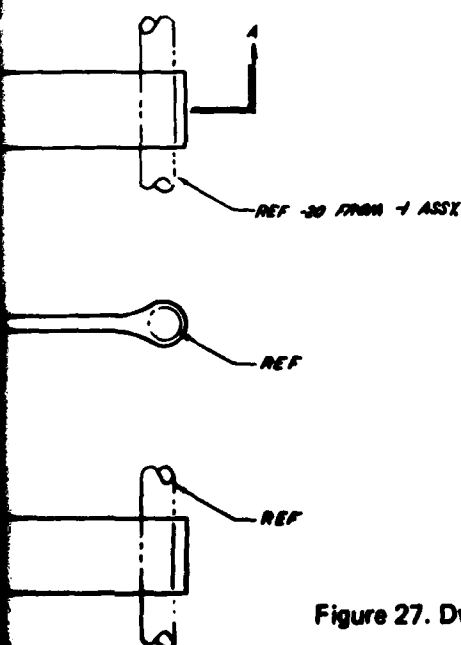

-10 CROSS STRAP


Figure 27. Dwg, S-3A Ballast Block, Strap Assemblies

AP ASSY. (2 REQD)


PREPARED BY CHECKED BY DATE DO NOT SIGN THIS DRAWING (UNLESS) SEE NOTE 19.	DESIGNED BY DRAWN BY CHECKED BY DATE	S-3A STRAP 002
---	---	----------------------

NADC-84015-60

REV 101000		DESCRIPTION		DATE	APPROVED
ZONE	LTN				

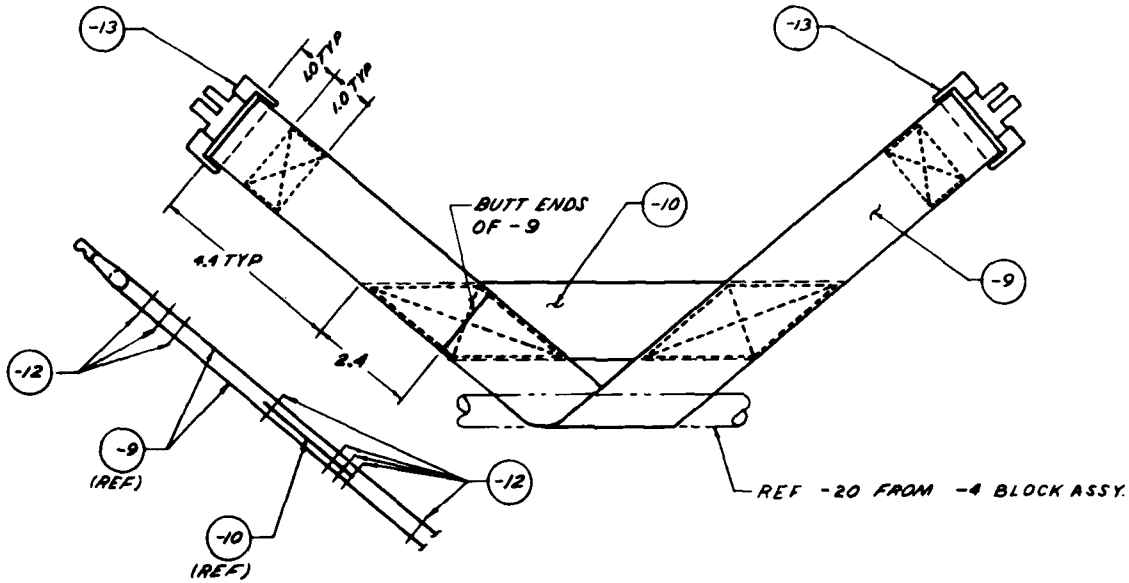

-7 LAP BELT STRAP ASSY. (1 REQD)

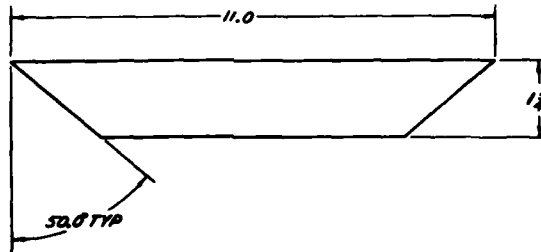

-10 CROSS STRAP

Dwg, S-3A Ballast Block, Strap Assemblies

38

DATE OF ISSUE: 10/10/00 DRAWN BY: J. L. B. / 10/10/00 CHECKED BY: J. L. B. / 10/10/00 SEE NOTE 19.		CONTRACT NO. 80206		ORNL AIR DEVELOPMENT CENTER WASHINGTON, D.C. 20545	
S-3A BALLAST BLOCK STRAP ASSEMBLIES		80206		S3ABB4/7	
1/2		1/2		1/2	

3





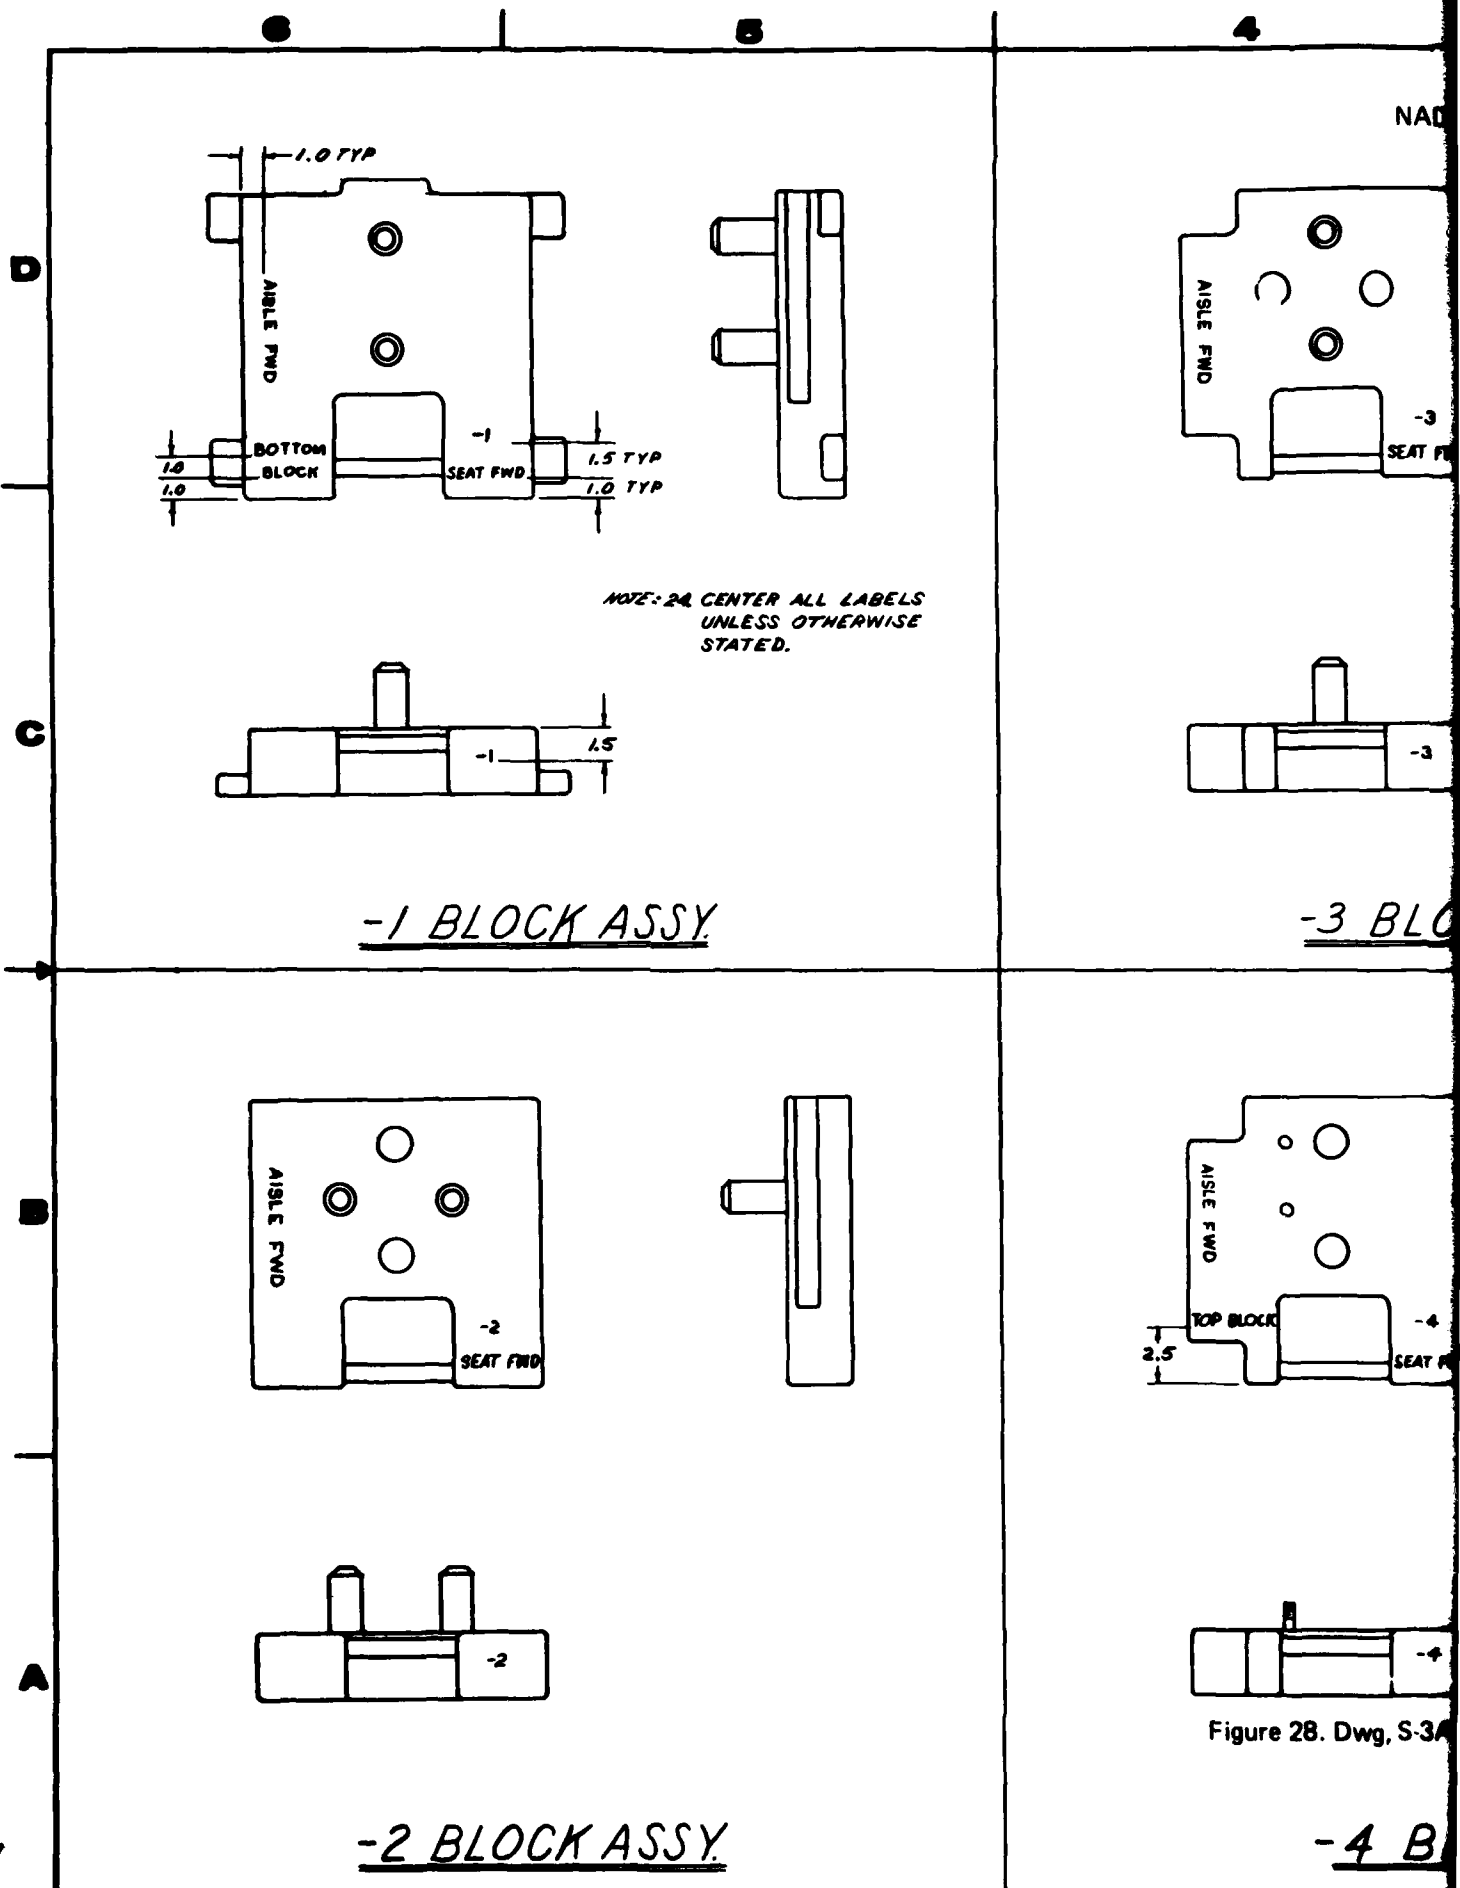


Figure 28. Dwg, S-3A



-3 BLOCK ASSY.

2.00 6.00



-5 LO






Figure 28. Dwg, S-3A Ballast Block, Stamping Detail

37

-4 BLOCK ASSY.




-6 LO

NOTES: 25. ALL STAMPING IS $\frac{3}{16}$ IN. HIGH
26. SEE -1 BLOCK FOR TYPICAL STAMPING
27. STAMPING IS NOT DRAWN TO SCALE



CHECKED BY: DESIGNED BY: DRAWN BY: DATE:		CHECKED BY: DESIGNED BY: DRAWN BY: DATE:	
DO NOT SCALE THIS DRAWING		N/A	
APPROVED:		APPROVED:	
APPROVED:		APPROVED:	

C-84015-60



LOCK ASSY.

-5 LOCKING PLATE



-6 LOCKING PLATE

NOTES: 25. ALL STAMPING IS $\frac{3}{16}$ IN. HIGH
26. SEE -1 BLOCK FOR TYPICAL STAMPING LOCATION
27. STAMPING IS NOT DRAWN TO SCALE

A Ballast Block, Stamping Detail

37

LOCK ASSY.

DRAWING NO. C-84015-60 CONTRACT NO.		BAWL AIR DEVELOPMENT CENTER WASHINGTON, PA. 15374	
DO NOT SCALE THIS DRAWING N/A		S-3A BALLAST BLOCK STAMPING DETAIL	
APPROVED:		DATE: 10/20/66	DRAWN BY: S3ABB4/B
APPROVED:		DATE: 1/4	DRAWN BY: B. B.

D

C

A

3

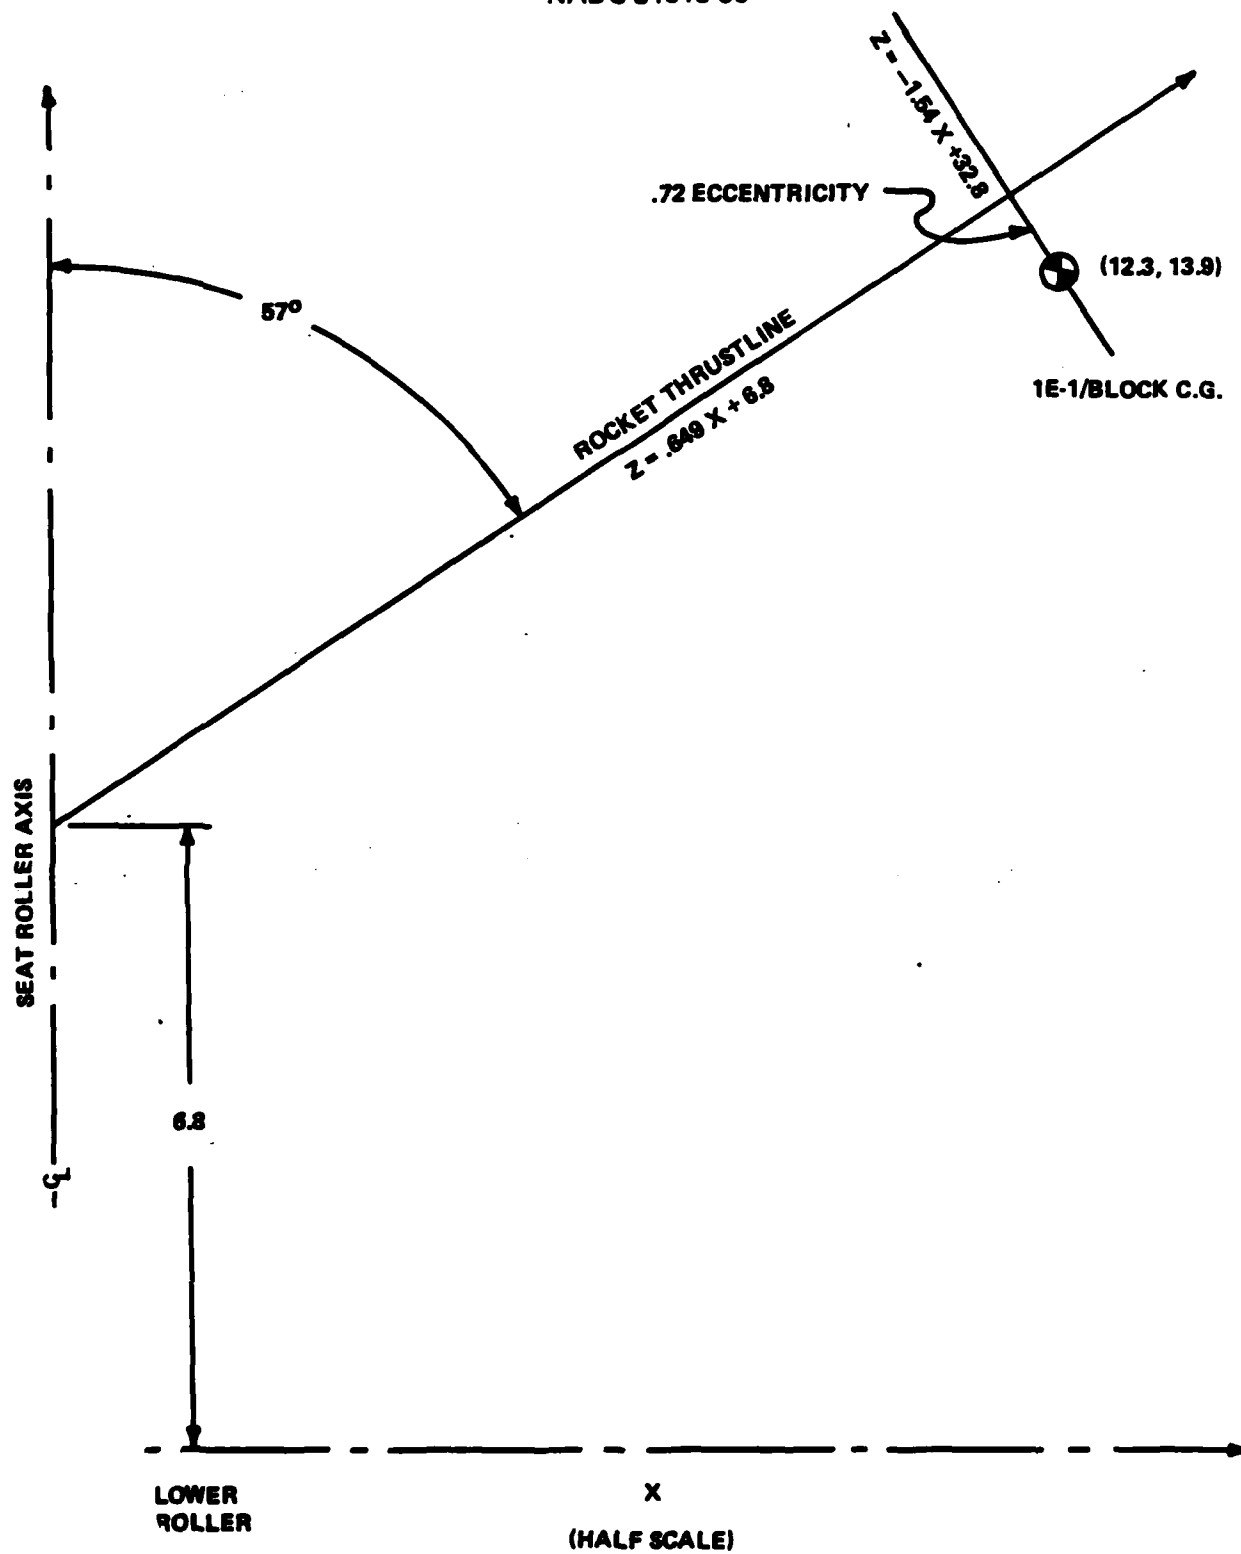


Figure 29. 1E-1 Ballast Block C.G. Eccentricity with Rocket Thrustline