

AD-A147 886

ESTIMATION OF WATER VAPOR PROFILES FROM TOTAL
PRECIPITABLE WATER(U) COLORADO STATE UNIV FORT COLLINS
DEPT OF ATMOSPHERIC SCIENCE. A E LIPTON ET AL. JUL 83

1/1

UNCLASSIFIED

AFGL-TR-83-0175 F19628-80-C-0140


F/G 4/2

NL

END

POWER

OTC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

12

AFGL-TR-83-0175

**ESTIMATION OF WATER VAPOR PROFILES FROM
TOTAL PRECIPITABLE WATER**

Alan E. Lipton
Donald W. Hillger
Thomas H. Vonder Haar

Department of Atmospheric Science
Colorado State University
Fort Collins, CO 80523

Scientific Report No. 3

July 1983

Approved for public release; distribution unlimited

AIR FORCE GEOPHYSICS LABORATORY
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
HANSCOM AFB, MASSACHUSETTS 01731

DTIC
ELECTE
NOV 15 1984
S B

84 11 05 105

AD-A147 886

DTIC FILE COPY

This report has been reviewed by the ESD Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS).

"This technical report has been reviewed and is approved for publication"


VINCENT J. FALCONE, JR.
Contract Manager


KENNETH R. HARDY
Chief, Satellite Meteorology Branch

FOR THE COMMANDER


ROBERT A. McCLATCHIEY
Director, Atmospheric Sciences Division

Qualified requestors may obtain additional copies from the Defense Technical Information Center. All others should apply to the National Technical Information Service.

If your address has changed, or if you wish to be removed from the mailing list, or if the addressee is no longer employed by your organization, please notify AFGL/DAA/LYC Hanscom AFB, MA 01731. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document requires that it be returned.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFGL-TR-83-0175	2. GOVT ACCESSION NO. <i>A147886</i>	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Estimation of Water Vapor Profiles from Total Precipitable Water.		5. TYPE OF REPORT & PERIOD COVERED Scientific Report No. 3 1 Dec 82 - 30 June 83
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Alan E. Lipton Donald W. Hillger Thomas H. Vonder Haar		8. CONTRACT OR GRANT NUMBER(s) F19628-80-C-0140
9. PERFORMING ORGANIZATION NAME AND ADDRESS Department of Atmospheric Science Colorado State University Fort Collins, CO 80523		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62101F 767013AB
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Geophysics Laboratory Hanscom AFB, MA 01731 Monitor - Vincent Falcone - LYS		12. REPORT DATE July 1983
		13. NUMBER OF PAGES 11 pages
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Precipitable Water Water Vapor Empirical Orthogonal Functions		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A method is described for converting a value of total precipitable water into an approximate mixing ratio profile. Mixing ratios are provided at the six radiosonde mandatory reporting levels. The method uses an approximation based on the empirical orthogonal functions (EOF's) of mixing ratio profiles. The approximate profile depends on the precipitable water, latitude, and time of year at the site of interest.		

DD FORM 1 JAN 73 1473

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

1.0 INTRODUCTION

Most atmospheric analysis routines and numerical models require water vapor information to be input at specific atmospheric levels. However, when water vapor data are minimal it may be necessary to rely on total precipitable water values as the only moisture information available. Such a condition is especially likely to occur over the oceans, where all upper-air data are scarce. The analyst then faces the problem of assigning values of mixing ratio (or some related quantity) to specific levels of the atmosphere based on an approximation to the integral of water vapor over all levels.

Several papers have discussed the relationship between precipitable water and surface dew point temperature. Smith (1966) suggested that the mixing ratio profile can be represented by the power law

$$w = w_0 \left(\frac{p}{p_0} \right)^\lambda, \quad (1)$$

where w is mixing ratio, p is pressure, λ is an empirically derived constant, and the subscript 0 refers to the surface. Equation 1 can be used to relate precipitable water to w at all levels. While λ is computed for a given latitude and season, the solution for w is constrained to a power law distribution.

DTIC
ELECTE
NOV 15 1984
S B D



For	
AI	
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

2.0 EIGENVECTOR APPROACH

An alternative method may be used to relate total water to mixing ratio at specific levels. This method is based on computing the empirical orthogonal functions (eigenvectors) of mixing ratio profiles. Given a data base of profiles for a particular latitude band and season, eigenvectors can be computed which represent the basic modes of vertical variation in water vapor. The first eigenvector represents the primary mode, which describes how variations in total water translate into mixing ratio profile variations. Kendall (1975) gives a complete discussion of eigenvectors and the associated principal components. Wachtmann (1975) gives an example of the use of eigenvectors to represent atmospheric profiles.

Any mixing ratio profile vector $\underline{y}$ can be represented as a linear combination of the eigenvectors and a vector $\underline{c}$ of coefficients.

$$\underline{y} = \underline{y}_m + \underline{E}\underline{c} \quad (2)$$

where $\underline{E}$ is a square matrix with each column composed of one eigenvector, and $\underline{y}_m$ is the mean mixing ratio profile. If we ignore all minor modes of mixing ratio variation, we can approximate $\underline{y}$ using only the first eigenvector $\underline{e}$ and its corresponding coefficient c

$$\underline{y} \approx \underline{y}_m + \underline{e}c \quad (3)$$

From Equation 3 it is clear that an approximation to the mixing ratio profile can be obtained by finding the appropriate coefficient c ,

given that the first eigenvector and the mean profile are specified in advance.

The remaining task is to show how c can be determined from precipitable water U . Precipitable water is defined as

$$U = \frac{1}{g_0} \int_{p_0}^{p_1} w \, dp. \quad (4)$$

If the trapezoidal approximation is used for the integral then this becomes

$$U = \frac{1}{g_0} \sum_{i=1}^L \bar{w}_i \Delta p_i \quad (5)$$

where $\bar{w}_i = (w_i + w_{i-1})/2$; $\Delta p_i = p_i - p_{i-1}$, and L is the number of levels at which measurements are made. Substituting from Equation 3 gives

$$U = \frac{1}{g_0} \sum_{i=1}^L (\bar{e}_i c + \bar{w}_{mi}) \Delta p_i, \quad (6)$$

where $\bar{e}_i$ and $\bar{w}_{mi}$ are defined similarly to $\bar{w}_i$. Solving for c gives

$$c = \frac{\sum_{i=1}^L \bar{w}_{mi} \Delta p_i}{\sum_{i=1}^L \bar{e}_i \Delta p_i} \quad (7)$$

which can be written as

$$c = \frac{aU - b}{b} \quad (8)$$

since $a = \sum_{i=1}^L \bar{w}_i \Delta p_i$ and $b = \sum_{i=1}^L \bar{e}_i \Delta p_i$ are constants for a given latitude band and season. The water vapor profile can thus be easily approximated from precipitable water by using Equation 8 and then Equation 3.

3.0 RESULTS

The mixing ratio means and the first eigenvectors were computed at the six mandatory levels for five domains of season and latitude using a data base of oceanic radiosonde measurements of mixing ratio. Table 1 defines the five domains and gives the computed values of a and b . The first eigenvectors are given in Table 2 and the mean mixing ratios are given in Table 3.

Table 1. The five domains for computation.

Domain**	Latitude	Season*	Number in Data Base	a ($\text{kg m}^{-1} \text{s}^{-2}$)	b (kPa)
1 - TR	30°S-30°N	All	173	680.2	42.50
2 - MLS	30°-60°N	Summer	184	508.1	41.90
3 - MLW	30°-60°N	Winter	55	325.9	36.08
4 - POS	60°-90°N	Summer	97	255.7	49.67
5 - POW	60°-90°N	Winter	116	137.8	38.34

*Summer = 1 May - 31 October. Winter = 1 November - 30 April
 **TR = Tropical, ML = Mid-latitude, PO = Polar

Table 2. First Eigenvectors.

Domain	Pressure Level (kPa)						Explained Variance (%)
	30	40	50	70	85	100	
1 - TR	.011	.038	.099	.302	.545	.775	79
2 - MLS	.009	.031	.083	.285	.573	.763	77
3 - MLW	.005	.036	.073	.127	.540	.828	70
4 - POS	.003	.059	.148	.433	.670	.582	75
5 - POW	.000	.013	.053	.244	.525	.813	88

Table 3. Mean Mixing Ratios (g/kg)

Domain	Pressure Level (kPa)					
	30	40	50	70	85	100
1 - TR	.22	.63	1.45	3.96	9.08	13.91
2 - MLS	.19	.59	1.17	3.18	6.30	10.47
3 - MLW	.15	.47	.87	1.77	4.03	6.97
4 - POS	.09	.36	.76	1.91	3.04	4.39
5 - POW	.02	.13	.33	.97	1.75	2.56

The mean mixing ratios and the eigenvectors can be compared using the graphs in Figures 1 and 2, respectively. As expected, there is more total water in summer than in winter, and more in lower latitudes. For each domain the first eigenvector shows the vertical distribution of mixing ratio variance within the first mode of water vapor variability.

The influences of the means and eigenvectors for the five domains are demonstrated by the curves in Figure 3. The profiles shown were derived by solving Equations 8 and 3 for an arbitrary value of $U = 2.22 \text{ g/cm}^2$, and using the appropriate values of g , γ_m , a , b for each domain. Note that the shapes of the polar summer and winter (POS and POW) profiles are unrealistic in this case because 2.22 cm is a very high value of precipitable water for the polar region. The profile shapes are actually a different function of precipitable water for each domain.

4.0 COMPUTER PROGRAM

A FORTRAN computer program has been written which performs the conversion of precipitable water values into approximate mixing ratio profiles. All of the necessary coefficients are stored in the program, so the only needed inputs are latitude, julian date, and precipitable water. The code is brief and includes ample documentation. The Appendix to this report provides a program listing and sample output.

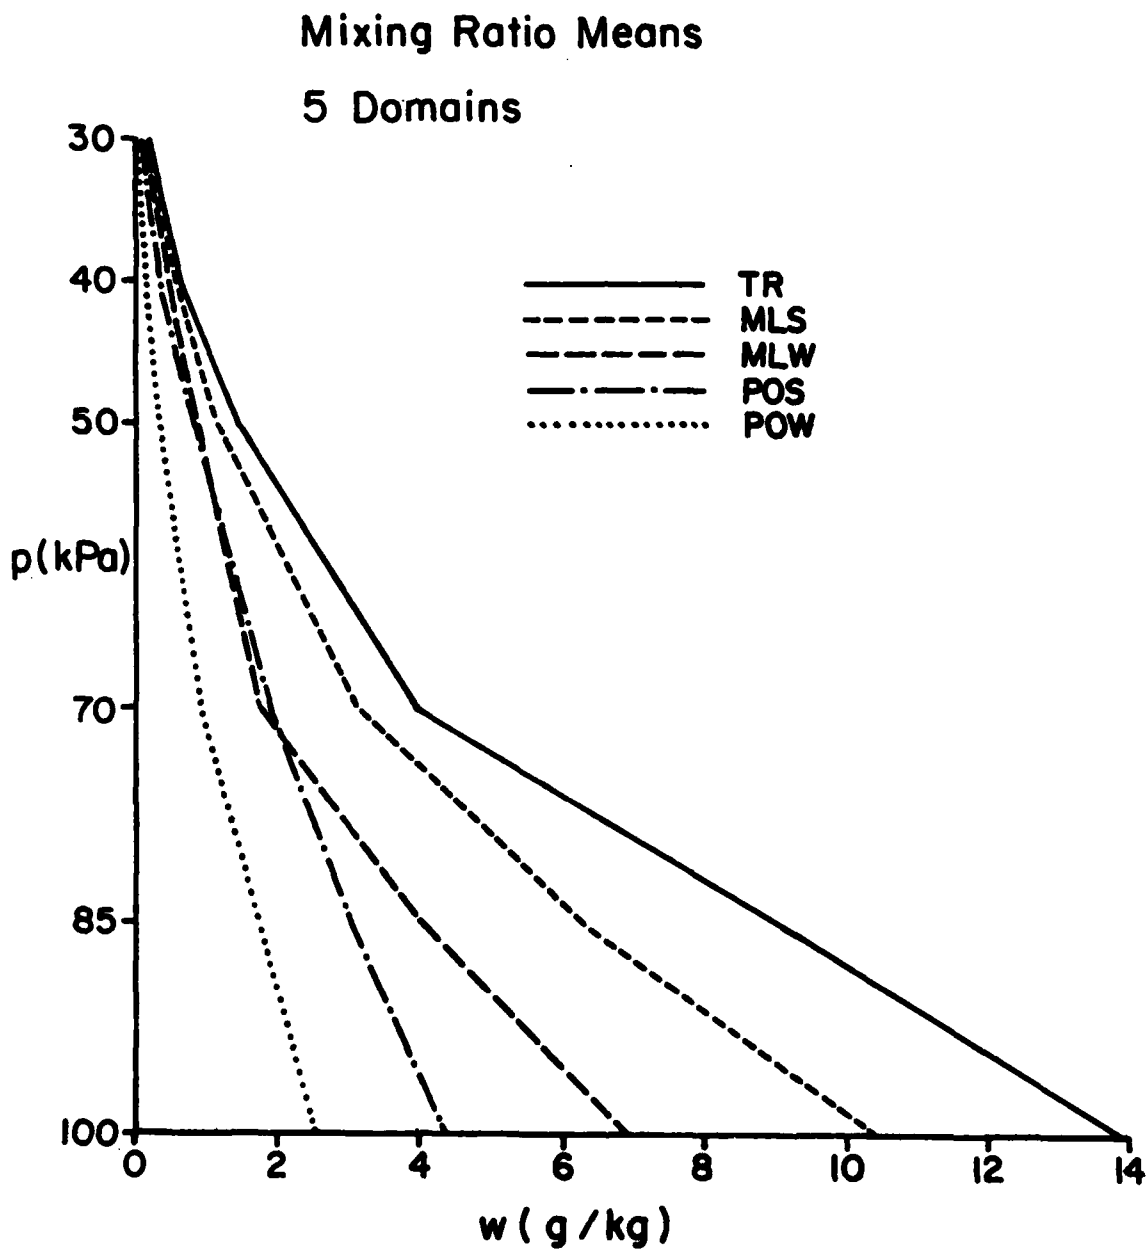


Figure 1. Mean mixing ratio profiles computed from the five data base sets indicated in Table 1.

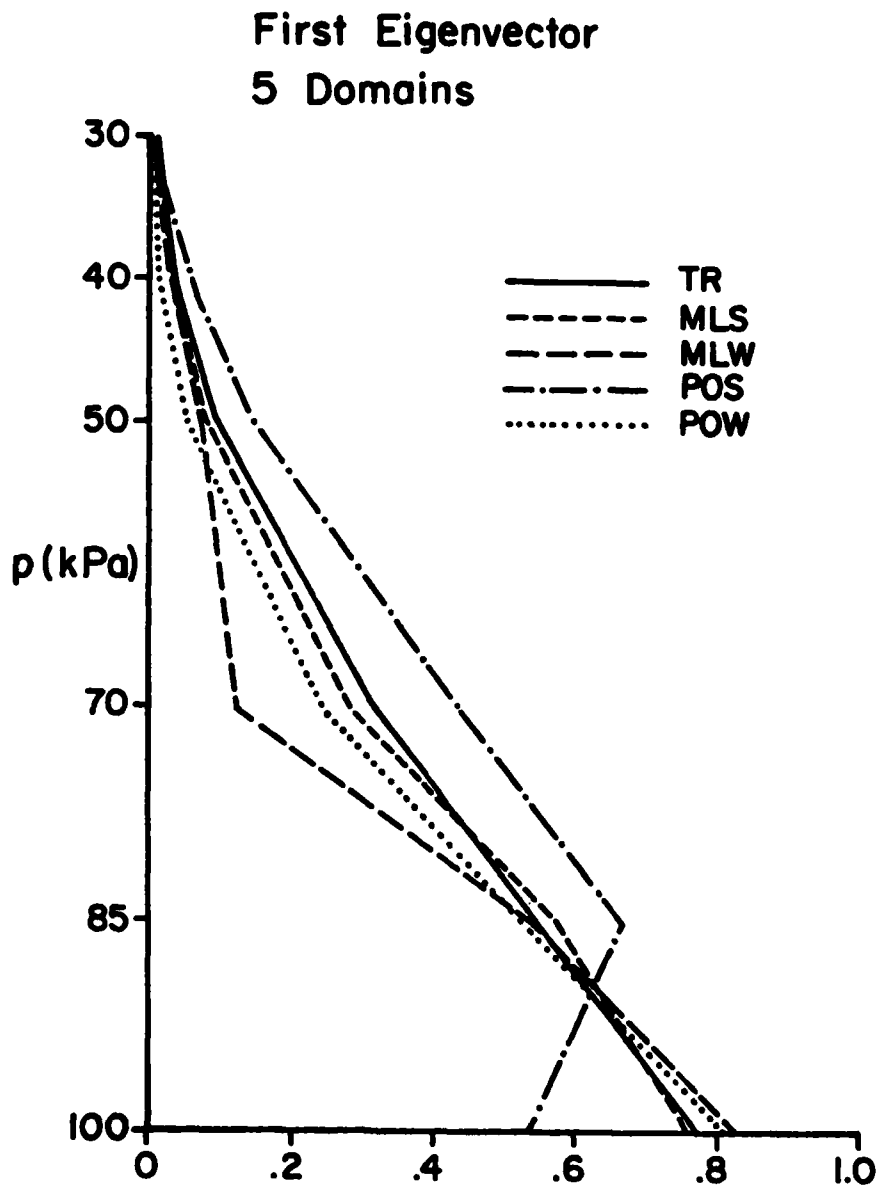


Figure 2. For each of the five domains listed in Table 1, the plot shows the first eigenvector of the mixing ratio covariance matrix.

Profile Domain Comparison 2.22cm Precipitable Water

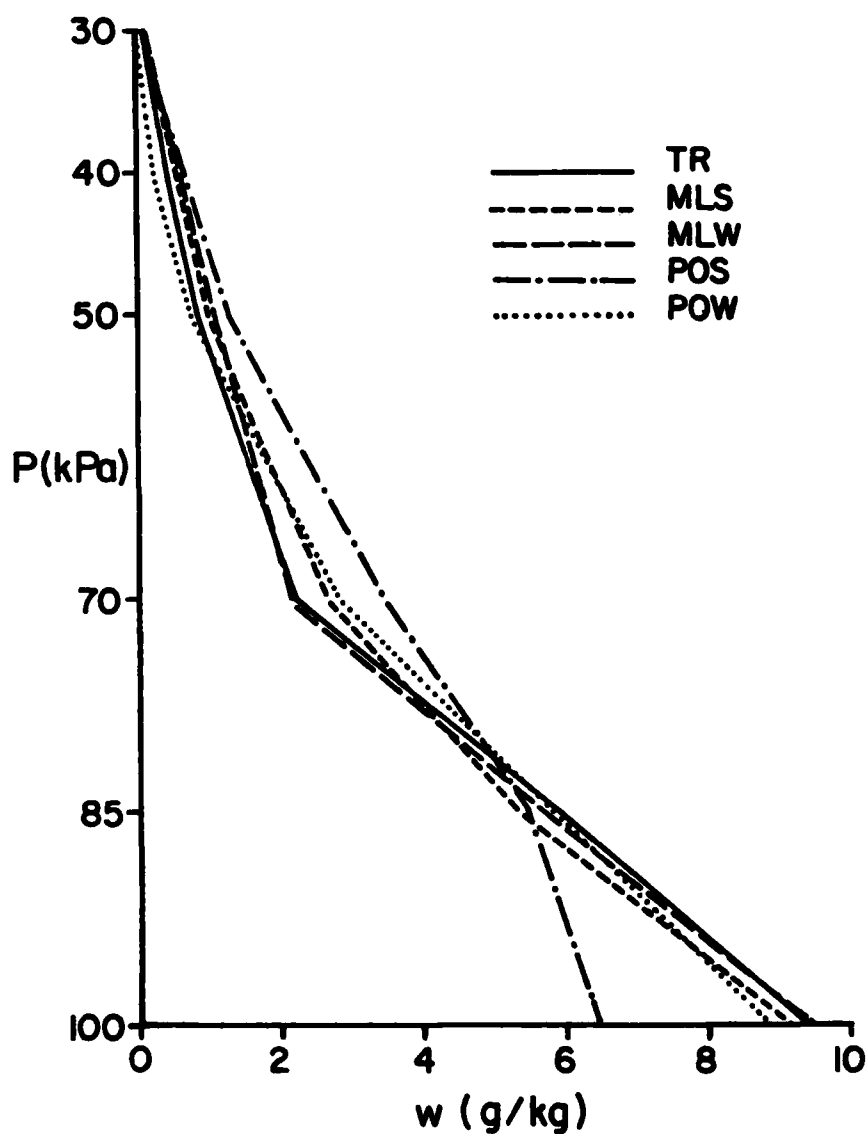


Figure 3. Example of a single value of total precipitable water (2.22 cm) translated into a mixing ratio profile for each of the five domains listed in Table 1.

REFERENCES

- Kendall, M., 1975: Multivariate Analysis. Hafner Press, New York.
- Smith, W. L., 1966: Note on the relationship between total precipitable water and surface dew point. J. Appl. Meteor., 5, 726-727.
- Wachtmann, R. F., 1975: Expansion of atmospheric temperature-moisture profiles in empirical orthogonal functions for remote sensing applications. Remote Sensing of the Atmosphere, Technical Digest, 19-21 March, WB5, 1-5.

```

PROGRAM PWPROFL(INPUT,OUTPUT,TAPE5=INPUT,TAPE6=OUTPUT)
***** THIS PROGRAM DERIVES A
***** "MOST PROBABLE" MIXING RATIO PROFILE FROM A PRECIPITABLE WATER
***** VALUE. THE COEFFICIENTS USED ARE SPECIFIC TO
***** LATITUDE BAND AND TIME OF YEAR.

***** VARIABLE IDENTIFICATION *****
***** E = COEFFICIENTS OF THE FIRST EIGENVECTOR
***** TOP = NUMERATOR COEFFICIENT
***** DEN = DENOMINATOR COEFFICIENT
***** WM = MEAN MIXING RATIO PROFILES
***** W = DERIVED MIXING RATIO PROFILE
***** PW = PRECIPITABLE WATER
***** ISESN = SEASON INDICATOR (WINTER=1, SUMMER=-1)
***** I = IDENTIFIES SEASON/LATITUDE-BAND DOMAIN
***** C = FIRST PRINCIPLE COMPONENT
*****

***** STORAGE ALLOCATION *****
*****
***** DIMENSION TOP(5),DEN(5),WM(6,5),W(6),E(6,5),P(6)
***** DATA TOP/680.2,508.1,325.9,255.7,137.8/,DEN/42.50,41.90,36.08,
***** + 49.67,38.34/,P/30.,40.,50.,70.,85.,100./
***** DATA WM/00.22,00.63,01.45,03.96,09.08,13.91,
***** + 00.19,00.59,01.17,03.18,06.30,10.47,
***** + 00.15,00.47,00.87,01.77,04.03,06.97,
***** + 00.09,00.36,00.76,01.91,03.04,04.39,
***** + 00.02,00.13,00.33,00.97,01.75,02.56/
***** DATA E/.011,.038,.099,.302,.545,.775,
***** + .009,.031,.083,.285,.573,.763,
***** + .005,.036,.073,.127,.540,.828,
***** + .003,.059,.148,.433,.670,.982,
***** + .000,.013,.053,.244,.525,.813/
*****

***** WRITE A HEADER *****
*****
***** WRITE(6,080)(P(L), L=1,6)
***** 080 FORMAT("1","LATITUDE JULIAN PW(CH)",10X,"MIXING RATIO (G/KG)"
***** + /13X,"DAY",13X,6(F6.0,2X),"<--PPESSURE (KPA)"
*****

***** READ A DATA SET AND IDENTIFY CLASS *****
*****
***** DO 420 J=1,500
***** READ(5,110)PLAT,JDAY,PW
***** 110 FORMAT(1X,F6.2,I10,F10.2)
***** IF(EOF(5).NE.0)GOTO 440
***** ISESN=-1
***** IF((JDAY.LT.121).OR.(JDAY.GT.304))ISESN=1
***** IF(PLAT.GE.0)GOTO 210
***** PLAT=-PLAT
***** ISESN=-ISESN
***** 210 IF(PLAT.GT.30.)GOTO 220
***** I=1
***** GOTO 290
***** 220 IF(PLAT.GT.60.)GOTO 240
***** IF(ISESN.GE.0) GOTO 230
***** I=2
***** GOTO 290
***** 230 I=3
***** GOTO 290
***** 240 IF(ISESN.GE.0) GOTO 250
***** I=4
***** GOTO 290
***** 250 I=5
***** 290 CONTINUE
*****

***** COMPUTE MIXING RATIOS AND PRINT *****
*****
***** C=(196.2*PW-TOP(I))/DEN(I)
***** DO 320 L=1,6
***** W(L)=WM(L,I)+C*E(L,I)
***** 320 CONTINUE
***** WRITE(6,410) PLAT,JDAY,PW,(W(L), L=1,6)
***** 410 FORMAT(1X,F6.2,I10,F10.2,6F8.2)
***** 420 CONTINUE
*****

*****
***** 440 STOP
***** ENO

```

LATITUDE	JULIAN DAY	PW(CH)	MIXING RATIO (G/KG)						<--PRESSURE (KPA)
			30.	40.	50.	70.	85.	100.	
10.44	10	3.53	.22	.64	1.48	4.05	9.24	14.14	
71.11	159	1.10	.09	.31	.64	1.56	2.50	3.92	
63.39	309	1.14	.02	.16	.45	1.52	2.93	4.38	
2.36	149	4.11	.25	.74	1.74	4.86	10.70	16.21	
32.28	197	3.39	.22	.71	1.48	4.25	8.45	13.33	
38.11	349	2.45	.17	.62	1.18	2.31	6.35	10.52	
28.88	280	2.22	.16	.41	.88	2.22	5.94	9.45	
42.88	280	2.22	.17	.54	1.03	2.69	5.31	9.15	
35.24	111	2.22	.17	.58	1.09	2.16	5.67	9.49	
62.88	280	2.22	.10	.57	1.30	3.48	5.47	6.50	
62.88	20	2.22	.02	.23	.74	2.87	5.83	8.87	

END

FILMED

1-85

DTIC