

AD-A154 458

2 ~~3~~

AD


TECHNICAL REPORT ARLCB-TR-85010

**SHEAR DEFLECTION IN A THREE-POINT BEND
BEAM OF A SOLID CIRCULAR CROSS-SECTION**

BOAZ AVITZUR

MARCH 1985

**DTIC
ELECTE
MAY 30 1985
B**



**US ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER
LARGE CALIBER WEAPON SYSTEMS LABORATORY
BENET WEAPONS LABORATORY
WATERVLIET N.Y. 12189**

DTIC FILE COPY

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

85 5 02 036

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The use of trade name(s) and/or manufacture(s) does not constitute an official indorsement or approval.

DISPOSITION

Destroy this report when it is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARLCB-TR-85010	2. GOVT ACCESSION NO. AD-A154458	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SHEAR DEFLECTION IN A THREE-POINT BEND BEAM OF A SOLID CIRCULAR CROSS-SECTION		5. TYPE OF REPORT & PERIOD COVERED Final
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Boaz Avitzur		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Armament Research & Development Center Benet Weapons Laboratory, SMCAR-LCB-TL Watervliet, NY 12189-5000		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS No. 3111.16.0003.600 PRON No. 1A227D111A1A
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Armament Research & Development Center Large Caliber Weapon Systems Laboratory Dover, NJ 07801-5001		12. REPORT DATE March 1985
		13. NUMBER OF PAGES 11
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Deflection Shear Stresses Circular Beams		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An equation, correlating the elastic deflection of a simply supported beam of a circular cross-section, with the applied load and beam's material properties and dimensions is being offered here. The contributions due to the bending moment and due to shear stresses are computed and compared.		

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
DISCUSSION AND DERIVATIONS	2
CONCLUSION	8
REFERENCES	9

LIST OF ILLUSTRATIONS

1. Shear stresses in a circular beam under bending forces.	10
--	----

DTIC
ELECTE
MAY 30 1985
S B

Accession	
NTIS	✓
DTIC	
Availability	
Distribution	
Availability Code	
Dist	Avail and Special
A-1	



INTRODUCTION

It is customary in calculating the deflection of a simply supported beam under load, to compute that part of the deflection resulting from the accumulated curvature caused by the bending moment. These calculations are based on the assumption that planes normal to the beam's neutral plane remain planar and normal to the (curved) neutral surface. In these calculations, one replaces the equation describing the radius of curvature,

$$\frac{1}{\rho} = \frac{\frac{d^2y}{dt^2}}{[1 + (\frac{dy}{dt})^2]^{3/2}} \quad (1)$$

where $\rho \equiv$ radius of curvature, by

$$\frac{1}{\rho} = \frac{d^2y}{dt^2} \quad (2)$$

In the treatment of the bending of beams within the elastic limit, the smallest radius of curvature is

$$\frac{1}{\rho} = \frac{\sigma_0}{c \cdot E} \quad (3)$$

where $\sigma_0 \equiv$ the material's yield strength, $E \equiv$ the material's modulus of elasticity, and $c \equiv$ the outermost fiber (the one farthest from the neutral plane). This suggests that the smallest radius of curvature is proportional to the ratio E/σ_0 , of the material's properties, which for most structural materials, is in the order of 10^2 . Therefore, the assumption that dy/dt is one of small values and thus $(dy/dt)^2 \approx 0$ is a valid one.

Analyzing the equation for the combined deflection (ref 1) due to bending moment and due to shear, one can see that for most structural members with large length over height ratio, the contribution of shear to the deflection can be neglected. Haggag and Underwood (ref 1) offer the following for the deflection at midpoint in a symmetrically loaded beam of a rectangular cross-section. They suggest that

$$\delta_{\text{shear}} = \frac{3}{5} (1+\nu) \frac{Pl}{bhE} \quad (4)$$

and

$$\delta_{\text{bend}} = \frac{pl^3}{4bh^3E} \quad (5)$$

where $\delta \equiv$ deflection of beam's midpoint

$P \equiv$ load at beam's midpoint

$\nu \equiv$ beam material's Poisson's ratio

$E \equiv$ beam material's Modulus of Elasticity

$b \equiv$ beam's cross-sectional width

$h \equiv$ beam's cross-sectional height

$l \equiv$ distance between beam's supports.

Thus the ratio between the two portions of the deflection is

$$\frac{\delta_{\text{shear}}}{\delta_{\text{bend}}} = 2.4(1+\nu) \left(\frac{h}{l}\right)^2 \quad (6)$$

¹F. M. Haggag and J. H. Underwood, "Compliance of a Three-Point Bend Specimen at Load Line," ARDC Memorandum Report No. ARLCB-MR-84035, Benet Weapons Laboratory, Watervliet, NY, October 1984.

For most structural members where $(l/h) > 30$, the deflection due to shear is less than one-third of a percent. This portion of the deflection becomes a significant part of the total deflection in short, laboratory size, three-point bending test specimens. Such three-point bending tests are performed in studying the material's fracture toughness and/or in calculating its modulus of elasticity. This report presents similar equations for the evaluation of deflection due to shear, as compared to that due to bending moment, for a symmetrically loaded beam having a uniform solid circular cross-section.

DISCUSSION AND DERIVATIONS

Castigliano's theorem (ref 2), equating the internal deformation energy with that of the outside work done on the structural member, is being invoked here. However, since there is no method for directly measuring either the stress distribution or the strain distribution in the interior of the member, one has to resort to some assumptions concerning these distributions. The assumptions made here (for the circular beam) are as follows:

1. We are considering here linear elastic response of the material only, and as such invoke Hooke's stress-strain relation.
2. It is being assumed that planes normal to the beam's neutral plane remain planar and normal to that neutral surface at all times.
3. As a consequence of the above two assumptions, it is being assumed that the only normal-stress component is in the axial direction and it varies

²A. C. Ugural and S. K. Fenster, Advanced Strength and Applied Elasticity, American Elsevier, NY, 1981, pp. 146-148.

linearly from zero at the neutral surface to its maximum at the outermost fiber (and from zero at the cross-sections over the supports to its maximum where the moment is maximum, which is under the concentrated load).

4. The only components of shear stress are $\tau_y = \tau_x$ which act on planes parallel to the neutral surface (with an equal component on planes normal to the neutral surface).

5. It is being assumed here that the σ_{yx} component of shear τ_y is uniform across any line on the cross-section parallel to the neutral surface and at any given distance, $y < R_0$ from it, where $R_0 \equiv$ the beam's cross-sectional radius.

The shear force in the x direction acting on any shear surface $b \cdot xx$ at distance y from the neutral surface is being balanced by the axial forces as assumed in assumption 3 above, acting on the volume above or below that surface. (The volume is $A \cdot \Delta x$ where A is being defined in Figure 1 (ref 3).

Thus

$$\begin{aligned} \sigma_{xy} &= \frac{2 \int_y^{R_0} \int_0^{\sqrt{R_0^2 - y^2}} \frac{\Delta \sigma_{xx}}{\Delta x} dz dy}{b} = \frac{\frac{2}{I} \int_y^{R_0} \int_0^{\sqrt{R_0^2 - y^2}} \frac{\Delta M}{\Delta x} y dz dy}{2 \sqrt{R_0^2 - y^2}} = \frac{\frac{P}{I} \int_y^{R_0} \int_0^{\sqrt{R_0^2 - y^2}} y dz dy}{2 \sqrt{R_0^2 - y^2}} \\ &= \frac{2(R_0^2 - y^2)}{3 \pi R_0^4} P \end{aligned} \quad (7)$$

From Figure 1,

$$\frac{\tau_x}{\sigma_{xy}} = \frac{l_z}{Y} \quad (8)$$

³F. Panlilio, Elementary Theory of Structural Strength, John Wiley & Sons, Inc., NY, 1963, p. 165.

where

$$l_z = \sqrt{y^2 + z^2} = \sqrt{\frac{(R_0^2 - y^2)^2}{y^2} + z^2} \quad (9)$$

Thus

$$\frac{\tau_x}{\sigma_{xy}} = \frac{\sqrt{\frac{(R_0^2 - y^2)^2}{y^2} + z^2}}{\frac{R_0^2 - y^2}{y}} = \frac{\sqrt{(R_0^2 - y^2)^2 + y^2 z^2}}{R_0^2 - y^2} = \sqrt{\frac{y^2 z^2}{(R_0^2 - y^2)^2} + 1} \quad (10)$$

or

$$\begin{aligned} \tau_x &= \sqrt{\frac{y^2 z^2}{(R_0^2 - y^2)^2} + 1} \cdot \sigma_{xy} = \frac{2(R_0^2 - y^2)}{3\pi R_0^4} \cdot \sqrt{\frac{y^2 z^2}{(R_0^2 - y^2)^2} + 1} \cdot P \\ &= \frac{2}{3\pi R_0^4} \sqrt{(R_0^2 - y^2)^2 + y^2 z^2} P \end{aligned} \quad (11)$$

The local strain energy, due to shear, is

$$u_{\text{shear}} = \tau_x \gamma_x = 2 \frac{1+\nu}{E} \cdot \tau_x^2 = \frac{8(1+\nu)}{9 \cdot \pi^2 \cdot E \cdot R_0^8} \cdot [(R_0^2 - y^2)^2 + y^2 z^2] \cdot P^2 \quad (12)$$

or the total shear energy over the whole volume becomes

$$U_{\text{shear}} = \frac{8(1+\nu)P^2}{9\pi^2 E R_0^8} \cdot 8 \cdot \int_0^{l/2} \int_0^{R_0} \int_0^{\sqrt{R_0^2 - y^2}} [(R_0^2 - y^2)^2 + y^2 z^2] \cdot dz \cdot dy \cdot dx \quad (13)$$

for which

$$\begin{aligned} \int_0^{\sqrt{R_0^2 - y^2}} [(R_0^2 - y^2)^2 + y^2 z^2] dz &= [(R_0^2 - y^2)^2 z + \frac{y^2 z^3}{3}]_0^{\sqrt{R_0^2 - y^2}} = \\ &= (R_0^2 - y^2)^{5/2} + \frac{y^2}{3} (R_0^2 - y^2)^{3/2} = (R_0^2 - y^2)^{3/2} [R_0^2 - \frac{2}{3} y^2] \end{aligned} \quad (14)$$

and

$$\int_0^{R_0} (R_0^2 - y^2)^{3/2} [R_0^2 - \frac{2}{3} y^2] dy = R_0^2 \int_0^{R_0} (R_0^2 - y^2)^{3/2} dy - \frac{2}{3} \int_0^{R_0} y^2 (R_0^2 - y^2) dy \quad (15)$$

for which

$$R_0^2 \int_0^{R_0} (R_0^2 - y^2)^{3/2} dy = \frac{1}{4} [y \sqrt{R_0^2 - y^2}]_0^{R_0} + \frac{3R_0^2 y}{2} \sqrt{R_0^2 - y^2} + \frac{3R_0^4}{2} \sin^{-1} \frac{y}{R_0} \Big|_0^{R_0} = \frac{3\pi}{16} R_0^6 \quad (16)$$

and

$$-\frac{2}{3} \int_0^{R_0} y^2 (R_0^2 - y^2)^{3/2} dy = \left[\frac{1}{9} y \sqrt{R_0^2 - y^2}^5 - \frac{R_0^2 y}{36} \sqrt{R_0^2 - y^2}^3 - \frac{R_0^4 y}{24} \sqrt{R_0^2 - y^2} - \frac{R_0^6}{24} \sin^{-1} \frac{y}{R_0} \right]_0^{R_0} = -\frac{\pi R_0^6}{48} \quad (17)$$

Thus

$$\int_0^{R_0} (R_0^2 - y^2)^{3/2} [R_0^2 - \frac{2}{3} y^2] dy = (\frac{3}{16} - \frac{1}{48}) \pi R_0^6 = \frac{\pi}{6} R_0^6 \quad (18)$$

and

$$\frac{\pi}{6} R_0^6 \int_0^{l/2} dx = \frac{\pi}{6} R_0^6 x \Big|_0^{l/2} = \frac{\pi}{12} R_0^6 l$$

or

$$U_{\text{shear}} = \frac{64(1+\nu)P^2}{9\pi^2 E R_0^8} \int_0^{l/2} \int_0^{R_0} \int_0^{\sqrt{R_0^2 - y^2}} [(R_0^2 - y^2)^2 + y^2 z^2] dz \cdot dy \cdot dx = \frac{16(1+\nu)P^2}{27\pi E R_0^2} l \quad (19)$$

The local strain energy due to normal stresses or due to the bending moment is

$$U_{\text{bend}} = \sigma_{xx} \epsilon_{xx} = \frac{\sigma_{xx}^2}{E} \quad (20)$$

where

$$\sigma_{xx} = \frac{M}{I} y = \frac{P}{2I} xy \quad (21)$$

and where

$$I = \frac{\pi}{4} R_0^4 \quad (22)$$

Thus

$$u_{\text{bend}} = \frac{4p^2}{\pi^2 R_0^8 E} x^2 y^2 \quad (23)$$

Thus, the total bending energy, U_{bend} , is derived as follows:

$$U_{\text{bend}} = \frac{4p^2}{\pi^2 R_0^8 E} 8 \int_0^{l/2} \int_0^{R_0} \int_0^{\sqrt{R_0^2 - y^2}} x^2 y^2 dz dy dx = \frac{32p^2}{\pi^2 R_0^8 E} \int_0^{l/2} \int_0^{R_0} x^2 y^2 \sqrt{R_0^2 - y^2} dy dx \quad (24)$$

where

$$\begin{aligned} \int_0^{R_0} x^2 y^2 \sqrt{R_0^2 - y^2} dy &= x^2 \left[\frac{y}{4} \sqrt{R_0^2 - y^2} + \frac{R_0^2}{8} (y \sqrt{R_0^2 - y^2} + R_0^2 \sin^{-1} \frac{y}{R_0}) \right]_0^{R_0} = \\ &= \frac{\pi}{2} x^2 \frac{R_0^4}{8} = \frac{\pi}{16} x^2 R_0^4 \end{aligned} \quad (25)$$

and

$$\frac{\pi R_0^4}{16} \int_0^{l/2} x^2 dx = \frac{\pi R_0^4}{48} x^3 \Big|_0^{l/2} = \frac{\pi}{384} R_0^4 l^3 \quad (26)$$

Thus

$$U_{\text{bend}} = \frac{p^2 l^3}{12 \pi E R_0^4} \quad (27)$$

and

$$U_{\text{total}} = \frac{p^2 l}{108 \pi E R_0^2} \left[9 \left(\frac{l}{R_0} \right)^2 + 64(1+\nu) \right] \quad (28)$$

Invoking Castigliano's theorem,

$$\frac{p^2 l}{108 \pi E R_0^2} \left[9 \left(\frac{l}{R_0} \right)^2 + 64(1+\nu) \right] = P \delta \quad (29)$$

from which

$$\delta = \frac{P l}{108 \pi E R_0^2} \left[9 \left(\frac{l}{R_0} \right)^2 + 64(1+\nu) \right] \quad (30)$$

or

$$\frac{\delta_{\text{shear}}}{\delta_{\text{bend}}} = \frac{64(1+\nu)}{9} \left(\frac{R_0}{l} \right)^2 = \frac{16(1+\nu)}{9} \left(\frac{D_0}{l} \right)^2 \quad (31)$$


where $D_0 \equiv$ beam's cross-sectional direction $= 2 \cdot R_0$.

CONCLUSION

As in the case of a rectangular beam, the ratio between δ_{shear} and δ_{bend} diminishes as the square of the ratio of height over the distance between the supports diminishes. However, this ratio is being multiplied by a different coefficient, $16/9(1+\nu)$ for a solid circular cross-section compared with $2.4(1+\nu)$ for a solid rectangular cross-section.

REFERENCES

1. F. M. Haggag and J. H. Underwood, "Compliance of a Three-Point Bend Specimen at Load Line," ARDC Memorandum Report No. ARLCB-MR-84035, Benet Weapons Laboratory, Watervliet, NY, October 1984.
2. A. C. Ugural and S. K. Fenster, Advanced Strength and Applied Elasticity, American Elsevier, NY, 1981, pp. 146-148.
3. F. Panlilio, Elementary Theory of Structural Strength, John Wiley & Sons, Inc., NY, 1963, p. 165.

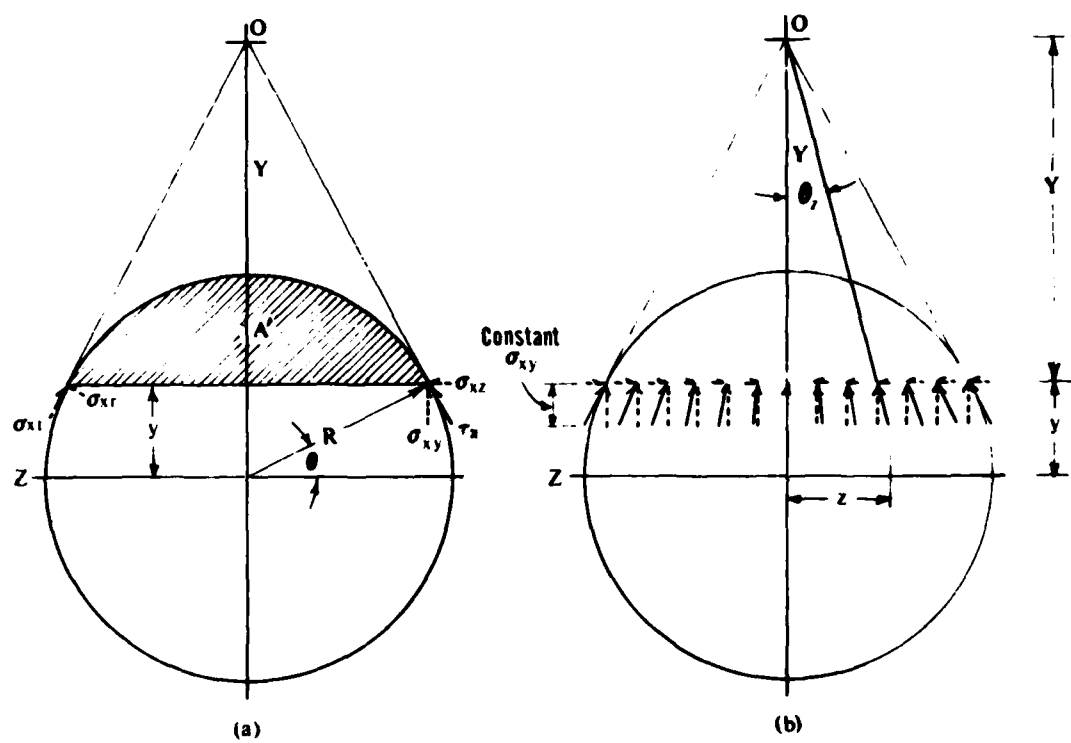

(Figure from Reference 3)

Figure 1. Shear stresses in a circular beam under bending forces.

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>
CHIEF, DEVELOPMENT ENGINEERING BRANCH	
ATTN: SMCAR-LCB-D	1
-DA	1
-DP	1
-DR	1
-DS (SYSTEMS)	1
-DS (ICAS GROUP)	1
-DC	1
CHIEF, ENGINEERING SUPPORT BRANCH	
ATTN: SMCAR-LCB-S	1
-SE	1
CHIEF, RESEARCH BRANCH	
ATTN: SMCAR-LCB-R	2
-R (ELLEN FOGARTY)	1
-RA	1
-RM	2
-RP	1
-RT	1
TECHNICAL LIBRARY	5
ATTN: SMCAR-LCB-TL	
TECHNICAL PUBLICATIONS & EDITING UNIT	2
ATTN: SMCAR-LCB-TL	
DIRECTOR, OPERATIONS DIRECTORATE	1
DIRECTOR, PROCUREMENT DIRECTORATE	1
DIRECTOR, PRODUCT ASSURANCE DIRECTORATE	1

NOTE: PLEASE NOTIFY DIRECTOR, BENET WEAPONS LABORATORY, ATTN: SMCAR-LCB-TL,
OF ANY ADDRESS CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
ASST SEC OF THE ARMY RESEARCH & DEVELOPMENT ATTN: DEP FOR SCI & TECH THE PENTAGON WASHINGTON, D.C. 20315	1	COMMANDER US ARMY AMCCOM ATTN: SMCAR-ESP-L ROCK ISLAND, IL 61299	1
COMMANDER DEFENSE TECHNICAL INFO CENTER ATTN: DTIC-DDA CAMERON STATION ALEXANDRIA, VA 22314	12	COMMANDER ROCK ISLAND ARSENAL ATTN: SMCRI-ENM (MAT SCI DIV) ROCK ISLAND, IL 61299	1
COMMANDER US ARMY MAT DEV & READ COMD ATTN: DRCDE-SG 5001 EISENHOWER AVE ALEXANDRIA, VA 22333	1	DIRECTOR US ARMY INDUSTRIAL BASE ENG ACTV ATTN: DRXIB-M ROCK ISLAND, IL 61299	1
COMMANDER ARMAMENT RES & DEV CTR US ARMY AMCCOM ATTN: SMCAR-LC SMCAR-LCE SMCAR-LCM (BLDG 321) SMCAR-LCS SMCAR-LCU SMCAR-LCW SMCAR-SCM-O (PLASTICS TECH EVAL CTR, BLDG. 351N) SMCAR-TSS (STINFO) DOVER, NJ 07801	1 1 1 1 1 1 1 2	COMMANDER US ARMY TANK-AUTMV R&D COMD ATTN: TECH LIB - DRSTA-TSL WARREN, MI 48090	1
DIRECTOR BALLISTICS RESEARCH LABORATORY ATTN: AMXBR-TSB-S (STINFO) ABERDEEN PROVING GROUND, MD 21005	1	COMMANDER US ARMY TANK-AUTMV COMD ATTN: DRSTA-RC WARREN, MI 48090	1
MATERIEL SYSTEMS ANALYSIS ACTV ATTN: DRXSY-MP ABERDEEN PROVING GROUND, MD 21005	1	COMMANDER US MILITARY ACADEMY ATTN: CHMN, MECH ENGR DEPT WEST POINT, NY 10996	1
		US ARMY MISSILE COMD REDSTONE SCIENTIFIC INFO CTR ATTN: DOCUMENTS SECT, BLDG. 4484 REDSTONE ARSENAL, AL 35898	2
		COMMANDER US ARMY FGN SCIENCE & TECH CTR ATTN: DRXST-SD 220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	1

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH AND DEVELOPMENT CENTER,
US ARMY AMCCOM, ATTN: BENET WEAPONS LABORATORY, SMCAR-LCB-TL,
WATERVLIET, NY 12189, OF ANY ADDRESS CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT'D)

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
COMMANDER US ARMY MATERIALS & MECHANICS RESEARCH CENTER ATTN: TECH LIB - DRXMR-PL WATERTOWN, MA 01272	2	DIRECTOR US NAVAL RESEARCH LAB ATTN: DIR, MECH DIV CODE 26-27, (DOC LIB) WASHINGTON, D.C. 20375	1 1
COMMANDER US ARMY RESEARCH OFFICE ATTN: CHIEF, IPO P.O. BOX 12211 RESEARCH TRIANGLE PARK, NC 27709	1	COMMANDER AIR FORCE ARMAMENT LABORATORY ATTN: AFATL/DLJ AFATL/DLJG EGLIN AFB, FL 32542	1 1
COMMANDER US ARMY HARRY DIAMOND LAB ATTN: TECH LIB 2800 POWDER MILL ROAD ADELPHIA, MD 20783	1	METALS & CERAMICS INFO CTR BATTELLE COLUMBUS LAB 505 KING AVENUE COLUMBUS, OH 43201	1
COMMANDER NAVAL SURFACE WEAPONS CTR ATTN: TECHNICAL LIBRARY CODE X212 DAHLGREN, VA 22448	1		

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH AND DEVELOPMENT CENTER,
US ARMY AMCCOM, ATTN: BENET WEAPONS LABORATORY, SMCAR-LCB-TL,
WATERVLIET, NY 12189, OF ANY ADDRESS CHANGES.