

AD-A158 718 STATIC STABILITY TEST OF THREE ELLIPTIC MISSILE BODY CONFIGURATIONS(U) ARNOLD ENGINEERING DEVELOPMENT CENTER ARNOLD AFS TN M E SELLERS MAY 85 AEDC-TSR-85-P8

AD-A158 718 STATIC STABILITY TEST OF THREE ELLIPTIC MISSILE BODY CONFIGURATIONS(U) ARNOLD ENGINEERING DEVELOPMENT CENTER ARNOLD AFS TN M E SELLERS MAY 85 AEDC-TSR-85-P8

1/1

UNCLASSIFIED

F/G 20/4


NL

7

END

FTH, M.F.D.

OTMC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

2



STATIC STABILITY TEST OF THREE ELLIPTIC MISSILE BODY CONFIGURATIONS

Marvin E. Sellers
Calspan Corporation/AEDC Division

AD-A158 718

DTIC
ELECTE
SEP 6 1985
S B D

May 1985

Final Report for Period April 18, 1985

Approved for public release; distribution unlimited.

DTIC FILE COPY

**ARNOLD ENGINEERING DEVELOPMENT CENTER
ARNOLD AIR FORCE STATION, TENNESSEE
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE**

85 9 05 058


NOTICES

When U. S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

APPROVAL STATEMENT

This report has been reviewed and approved.



NORMAN M. SCHMOEKER, 2LT, USAF
Aeronautical Systems Branch
Directorate of Aersp Flt Dyn Test
Deputy for Operations

Approved for publication:

FOR THE COMMANDER



ELTON R. THOMPSON
Actg Dir, Aersp Flt Dyn Test
Deputy for Operations

UNCLASSIFIED

AD-A158718

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			
4. PERFORMING ORGANIZATION REPORT NUMBER(S) AEDC-TSR-85-P8		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION Arnold Engineering Development Center	6b. OFFICE SYMBOL (If applicable) DO	7a. NAME OF MONITORING ORGANIZATION	
6c. ADDRESS (City, State and ZIP Code) Air Force Systems Command Arnold Air Force Station, TN 37389-5000		7b. ADDRESS (City, State and ZIP Code)	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION Air Force Wright Aeronautical Laboratories	8b. OFFICE SYMBOL (If applicable) FIMG	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (City, State and ZIP Code) Wright-Patterson AFB, OH 45433-6523		10. SOURCE OF FUNDING NOS.	
11. TITLE (Include Security Classification) SEE REVERSE OF THIS PAGE		PROGRAM ELEMENT NO. 62201F	TASK NO. CD48PB
12. PERSONAL AUTHOR(S) Sellers, Marvin E., Calspan Corporation/AEDC Division			
13a. TYPE OF REPORT Final	13b. TIME COVERED FROM 4/18/85 TO 4/18/85	14. DATE OF REPORT (Yr., Mo., Day) May 1985	15. PAGE COUNT 25
16. SUPPLEMENTARY NOTATION Available in Defense Technical Information Center (DTIC).			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD 20	GROUP 04	SUB. GR. elliptic bodies aerodynamic forces power law bodies wind tunnel test static stability transonic flow	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) A wind tunnel test was conducted to obtain data on the aerodynamic characteristics of three elliptic missile body configurations. The test was performed at nominal Mach numbers from 0.4 to 1.3 at a constant nominal free-stream unit Reynolds number of 2.4 million per ft. The angle-of-attack range was -4 to 20 deg at sideslip angles of 0 and 4 deg. Only sample tabulations of the test results are included in the report.			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT. ☒ DTIC USERS ☐		21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL W. O. Cole		22b. TELEPHONE NUMBER (Include Area Code) (615) 454-7813	22c. OFFICE SYMBOL DOS

DD FORM 1473, 83 APR

EDITION OF 1 JAN 73 IS OBSOLETE.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

11. TITLE

Static Stability Test of Three Elliptic Missile Body Configurations.

Accession For	
NTIS GFA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A-1	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

CONTENTS

	<u>Page</u>
NOMENCLATURE	2
1.0 INTRODUCTION	4
2.0 APPARATUS	
2.1 Test Facility	4
2.2 Test Articles	5
2.3 Test Instrumentation	5
3.0 TEST DESCRIPTION	
3.1 Test Conditions and Procedures	5
3.2 Data Acquisition and Reduction	6
3.3 Corrections	6
3.4 Uncertainty of Measurements	6
4.0 DATA PACKAGE PRESENTATION	7
5.0 REFERENCES	7

APPENDIXES

I. Illustrations

Figure

1. Model Installation	9
2. Model Details	11
3. Base Pressure Orifice Location	14
4. Typical Data Plot	15
5. Estimated Uncertainties in 4T Tunnel Parameters	16

II. Tables

Table

1. Model Configuration Designation	18
2. Nominal Test Conditions	19
3. Test Run Number Summary	20
4. Estimated Uncertainties	21

III. Sample Tabulated Data

Sample

1. Body- and Stability-Axes Data	24
2. Base Pressure Data	25

NOMENCLATURE

A	Reference area, 0.18896 ft ²
AB	Base area, 0.18896 ft ²
AFA	Flow correction angle in pitch, deg
ALPHA	Angle of attack, deg
a	Semimajor (horizontal) span at X, in.
a _{max}	Semimajor span at model base, in. (See Table 1)
BETA	Sideslip angle, deg
b	Semiminor (vertical) height at X, in.
b _{max}	Semiminor height at model base, in. (See Table 1)
CA	Forebody axial-force coefficient, body axes, CAT-CAB
CAB	Base axial-force coefficient, body axes, -(PBA-P)AB/Q·A
CAT	Total axial-force coefficient, body axes, total axial force/Q·A
CDS	Forebody drag coefficient, stability axes
CLL	Rolling-moment coefficient, body axes, rolling moment/Q·A·L
CLM	Pitching-moment coefficient, body axes, pitching moment/Q·A·L
CLM-A0	Slope of CLM versus ALPHA curve at ALPHA = 0, deg ⁻¹
CLN	Yawing-moment coefficient, body axes, yawing moment/Q·A·L
CLS	Forebody lift coefficient, stability axes
CN	Normal-force coefficient, body axes, normal force/Q·A
CN-A0	Slope of CN versus ALPHA curve at ALPHA = 0, deg ⁻¹
CONFIG	Model configuration designation
CY	Side-force coefficient, body axes, side force/Q·A
L	Reference length, in. (See Table 1)
(L/D)S	Lift-to-drag ratio, stability axes

LM Model length, 36.000 in.

M Free-stream Mach number

NCP Normal-force center-of-pressure location, body axes, inches from nose; $XMRP - (CLM \cdot L / CN)$ or $XMRP - (CLM - A0 \cdot L / CN - A0)$ for ALPHA = 0

P Free-stream static pressure, psfa

PBA Average base pressure, $(PBT + PBB + PBL + PBR) / 4$, psfa

PBi Base pressure, $i = T, B, L$, and R , where T, B, L , and R are top, bottom, left, and right looking upstream, respectively, psfa

PHI Roll angle, deg

PN Data point number

PT Tunnel-stilling chamber pressure, psfa

Q Free-stream dynamic pressure, psf

RE Free-stream unit Reynolds number, ft^{-1}

RUN Data set identification number

T Free-stream static temperature, $^{\circ}R$

TT Tunnel-stilling chamber temperature, $^{\circ}R$

X Axial location from nose of model, in.

XMRP Axial distance from model nose to model moment-reference location, 24.000 in.

YCP Side-force center-of-pressure location, body axes, inches from nose, $XMRP - (CLN \cdot L / CY)$

1.0 INTRODUCTION

The work reported herein was conducted by the Arnold Engineering Development Center (AEDC), Air Force Systems Command (AFSC), under Program Element 62201F, Control Number 2404, at the request of Air Force Wright Aeronautical Laboratories (AFWAL/FIMG), Wright-Patterson AFB, Ohio. The AFWAL/FIMG project manager was Mr. Don Shereda. The results were obtained by Calspan Corporation, AEDC Division, operating contractor for the aerospace flight dynamics testing facilities at the AEDC, AFSC, Arnold Air Force Station, Tennessee. The test was conducted in the Aerodynamic Wind Tunnel (4T) of the Propulsion Wind Tunnel (PWT) Facility on April 18, 1985, under AEDC Project Number CD48PB, PWT Test No. TC-793.

The purpose of the test was to obtain data on the aerodynamic characteristics of elliptic missile body configurations with ellipticity ratios of 2.0, 2.5, and 3.0 to 1.0. The test was performed at nominal Mach numbers from 0.4 to 1.3 at a constant nominal free-stream unit Reynolds number of 2.4 million per ft. The angle-of-attack range was -4 to 20 deg at sideslip angles of 0 and 4 deg.

The purpose of this report is to document the test and to describe the test parameters. The report provides information to permit use of the data but does not include any data analysis, which is beyond the scope of this report.

The final data package from the test has been transmitted to AFWAL/FIMG. Request for these data should be addressed to AFWAL/FIMG, Wright-Patterson AFB, OH 45433. A copy of the final tabulated data package is on file on microfilm at the AEDC.

2.0 APPARATUS

2.1 Test Facility

The AEDC Aerodynamic Wind Tunnel (4T) is a closed-loop continuous flow, variable-density tunnel in which the Mach number can be varied from 0.1 to 1.3 and can be set at discrete Mach numbers of 1.6 and 2.0 by placing nozzle inserts over the permanent sonic nozzle. At all Mach numbers, the stagnation pressure can be varied from 300 to 3,400 psfa. The test section is 4-ft square and 12.5 ft long with perforated, variable porosity (0.5- to 10- percent open) walls. It is completely enclosed in a plenum chamber from which air can be evacuated, allowing part of the tunnel airflow to be removed through the perforated walls of the test section. The model support system consists of a sector and sting attachment which has a pitch angle capability of -8 to 27 deg with respect to the tunnel centerline and a roll capability of ± 180 deg about the sting centerline. A more complete description of the tunnel may be found in Ref. 1.

2.2 Test Articles

The installation of the test articles in Tunnel 4T is shown in Figure 1. The test articles were elliptic missile body configurations with ellipticity ratios of 2.0, 2.5, and 3.0 to 1.0. The models were power-law bodies with an exponent of 0.5 and had the same longitudinal distribution of cross-sectional area. The semi-major and semiminor axis ordinates were derived from the following equations:

For horizontal projection (semimajor axis)

$$a = \frac{a_{\max}}{L^{0.5}} \cdot x^{0.5}$$

and for vertical projection (semiminor axis)

$$b = \frac{b_{\max}}{L^{0.5}} \cdot x^{0.5}$$

Details of the models are given in Figure 2 and the model configuration designation is presented in Table 1.

2.3 Test Instrumentation

The aerodynamic forces and moments were measured using an internally-mounted, six-component strain-gage balance. Pressures were measured at the base of the model. The radial location of the pressure orifices are shown in Figure 3. The pressures were measured using 15 PSID pressure transducers which are part of the 4T standard pressure system.

3.0 TEST DESCRIPTION

3.1 Test Conditions and Procedures

Measurements of the model steady-state forces and moments were obtained at Mach numbers from 0.4 to 1.3. The nominal test conditions established during the test are given in Table 2. Tunnel conditions were held constant while varying model attitude. Data were recorded at selected angles using the pitch/roll-pause technique. Data were obtained at angles-of-attack from -4 to 20 deg at sideslip angles of 0 and 4 deg. A test run number summary is presented in Table 3.

3.2 Data Acquisition and Reduction

All steady-state measurements were sequentially recorded by the facility on-line computer system and reduced to the desired final form. The data were then tabulated in the Tunnel 4T control room, recorded on magnetic tape, and transmitted to the AEDC central computer file. The data stored in the central computer file were generally available for plotting and analysis on the PWT Interactive Graphics System within 30 seconds after data acquisition. The immediate availability of the tabulated data permitted continual on-line monitoring of the test results. A typical data plot generated on the PWT Interactive Graphics System is shown in Figure 4.

The model force and moment data were reduced to coefficient form in the body- and stability-axes systems. The model reference area is given in the Nomenclature and the reference lengths are given in Table 1. The moment reference point is shown in Figure 2. The stability-axis system coefficients (CLS and CDS) were calculated using the forebody axial-force coefficient (CA) and the normal force coefficient (CN). The base pressure and its area (given in Nomenclature) were used to calculate the base axial-force.

3.3 Corrections

The aircraft angles of attack and sideslip were corrected for sting deflections caused by aerodynamic loads. The flow angularity (AFA) in the tunnel pitch plane was determined by testing the aircraft model upright and inverted, and the flow angularity corrections were then applied to the data. Corrections for the components of model weight, normally termed static tares, were also accounted for before the measured loads were reduced to coefficient form.

3.4 Uncertainty of Measurements

Uncertainties (combinations of system and random errors) of the basic tunnel parameters, shown in Figure 5, were estimated from repeat calibrations of the instrumentation and from the repeatability and uniformity of the test section flow during tunnel calibration. Uncertainties in the instrumentation systems were estimated from repeat calibration of the systems against secondary standards whose uncertainties are traceable to the National Bureau of Standards calibration equipment. The tunnel parameter and instrument uncertainties, for a 95-percent confidence level, were combined using the Taylor series method of error propagation described in Ref. 2 to determine the uncertainties of the parameters in Table 4.

4.0 DATA PACKAGE PRESENTATION


The final data package contained, 1) tabulated data summaries listing specific parameters, 2) digital magnetic computer tapes containing summary data, 3) test article installation photographs, 4) test run number summary, 5) model configuration identification, and 6) model sketches. Sample tabulated data are presented in Appendix III.

5.0 REFERENCES

1. Test Facilities Handbook (Twelfth Edition). "Propulsion Wind Tunnel Facility, Vol. 4." Arnold Engineering Development Center, March 1984.
2. Abernethy, R.B. and Thompson, J. W., Jr. "Handbook - Uncertainty in Gas Turbine Measurements." AEDC-TR-73-5 (AD755356), February 1973.

APPENDIX I

Illustrations

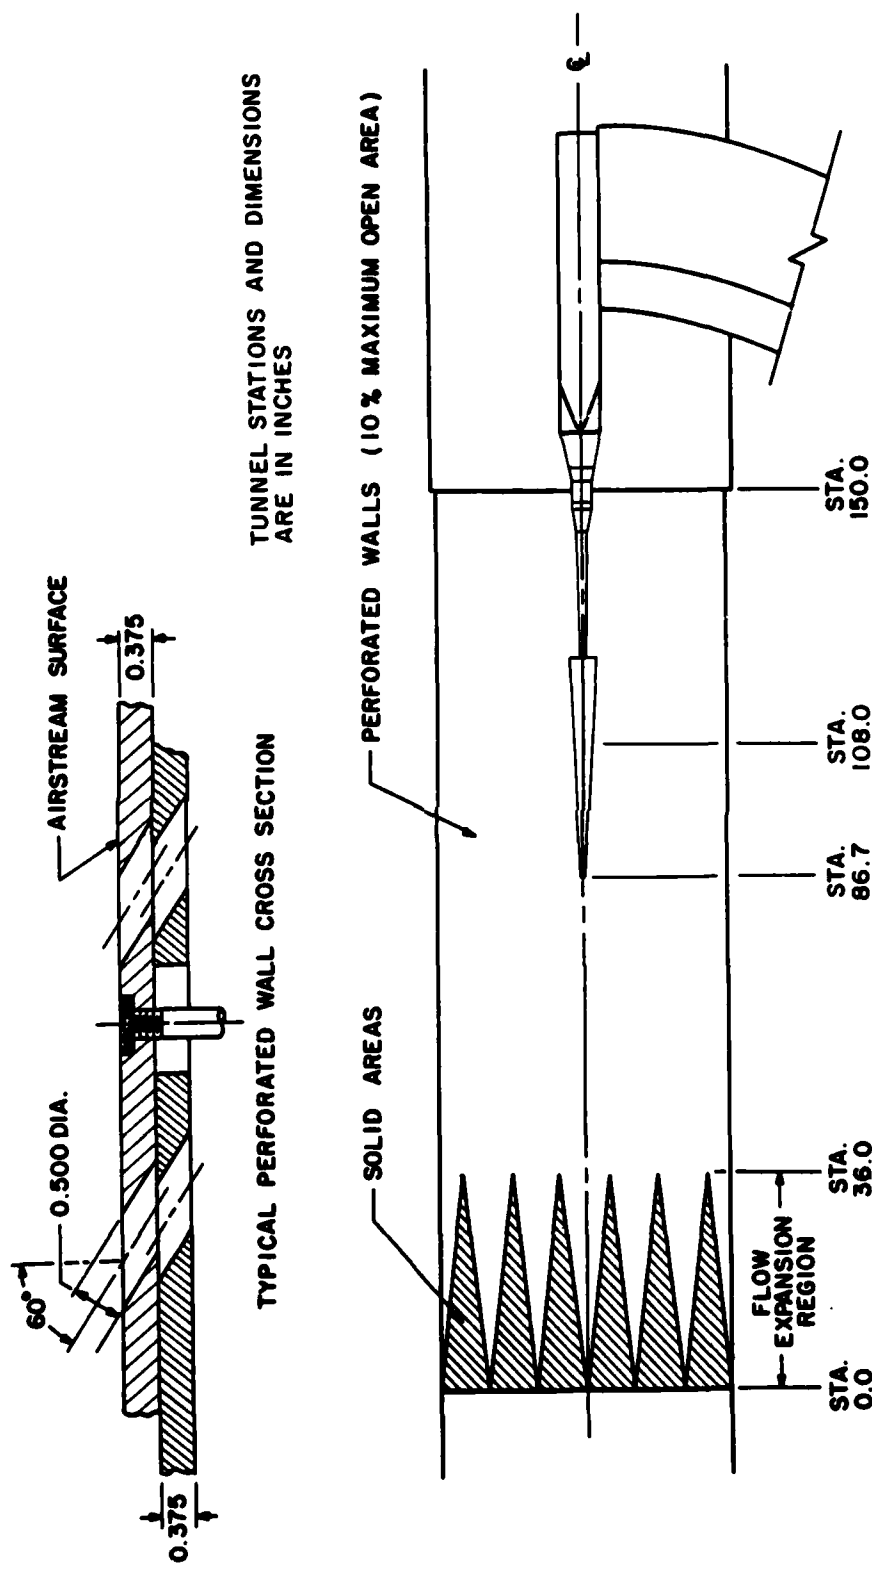

TUNNEL STATIONS AND DIMENSIONS
ARE IN INCHES

TYPICAL PERFORATED WALL CROSS SECTION

SOLID AREAS

PERFORATED WALLS (10% MAXIMUM OPEN AREA)

STA.
150.0

STA.
108.0

STA.
86.7

STA.
36.0

STA.
0.0

PITCH
CENTER


FLOW
EXPANSION
REGION

Figure 1. Model Installation


APC
Ames Research Center



b. Configuration B20
Figure 1. Concluded

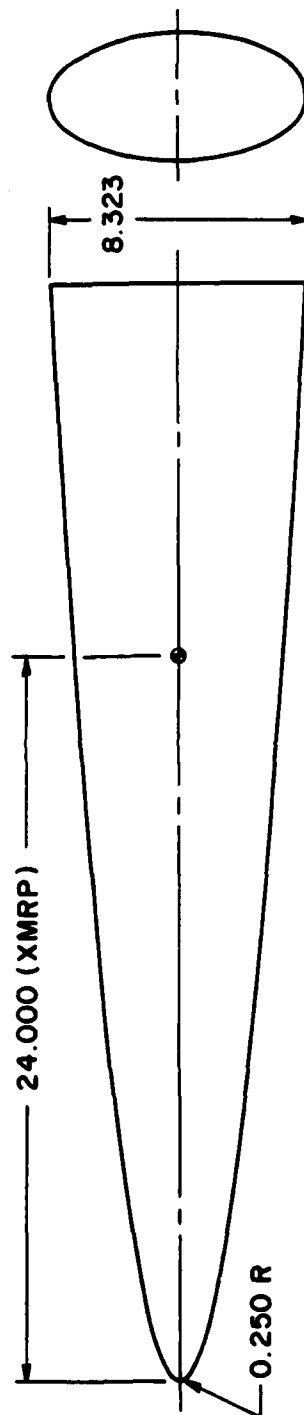


TOP VIEW

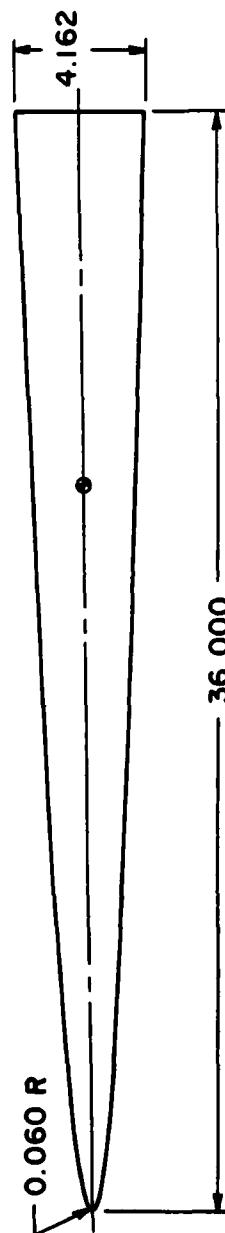


SIDE VIEW

DIMENSIONS IN INCHES

a. B20 Configuration
Figure 2. Model Details

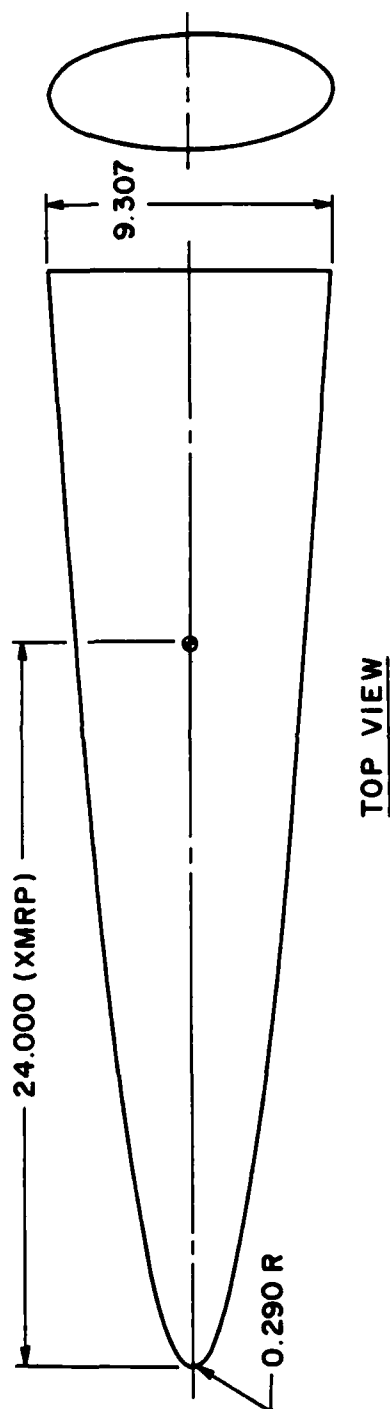


TOP VIEW

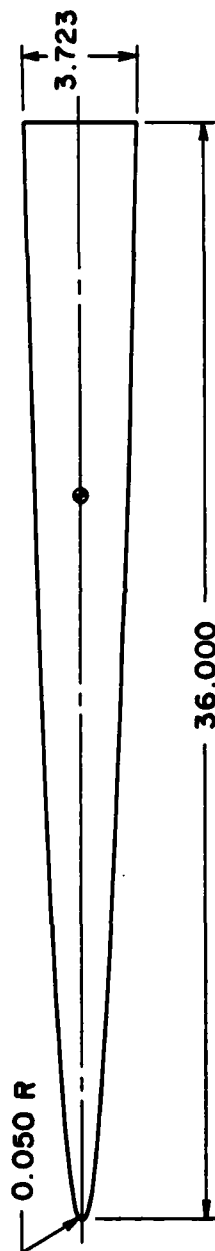


SIDE VIEW

DIMENSIONS IN INCHES

b. B25 Configuration
Figure 2. Continued

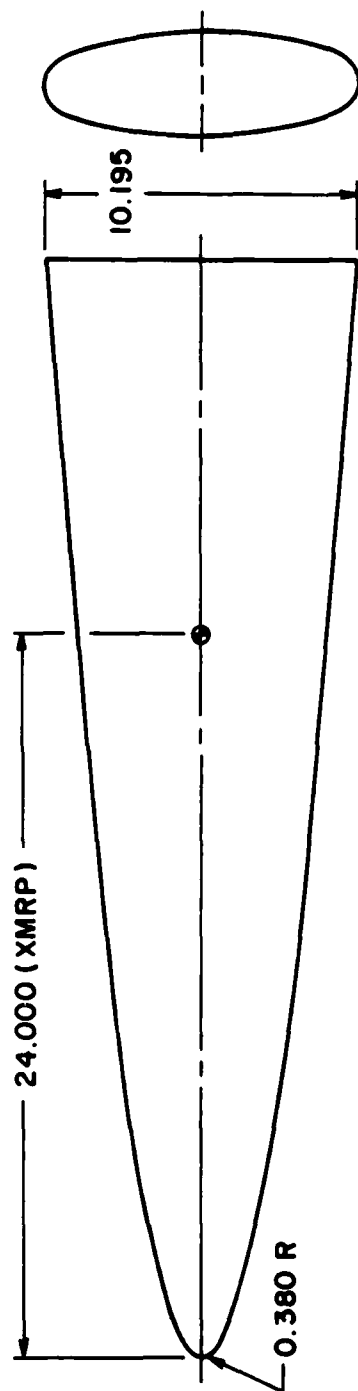


TOP VIEW

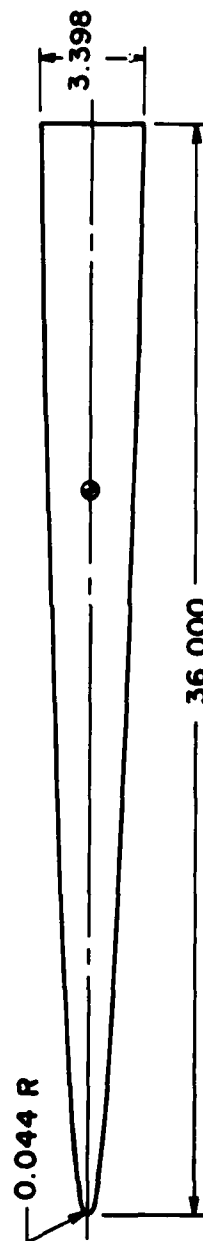

SIDE VIEW

DIMENSIONS IN INCHES

c. B30 Configuration
Figure 2. Concluded

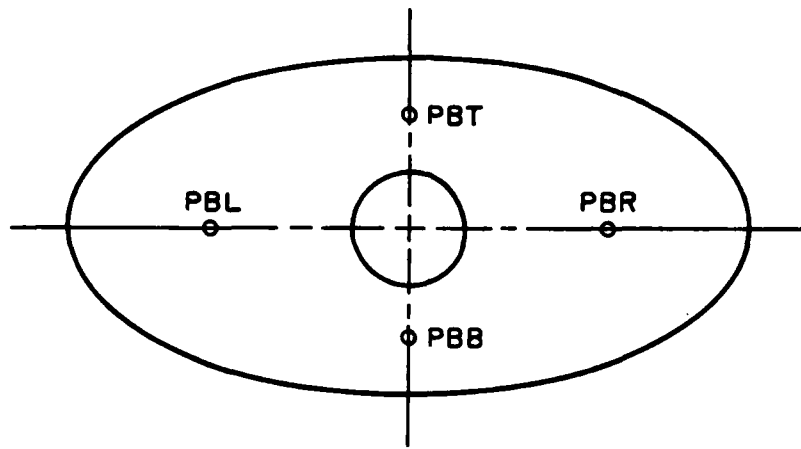

Looking Upstream ($\text{PHI} = 0$)

Figure 3. Base Pressure Orifice Location

DATE 04-23-85 CALSPAN FIELD SERVICES INC.
 PROJ- ARNOLD AFS, TN
 XXXX TC789 XXXX
 RUN - 47,82,106
 MACH=0.4
 1-B20 2-B25 3-B30

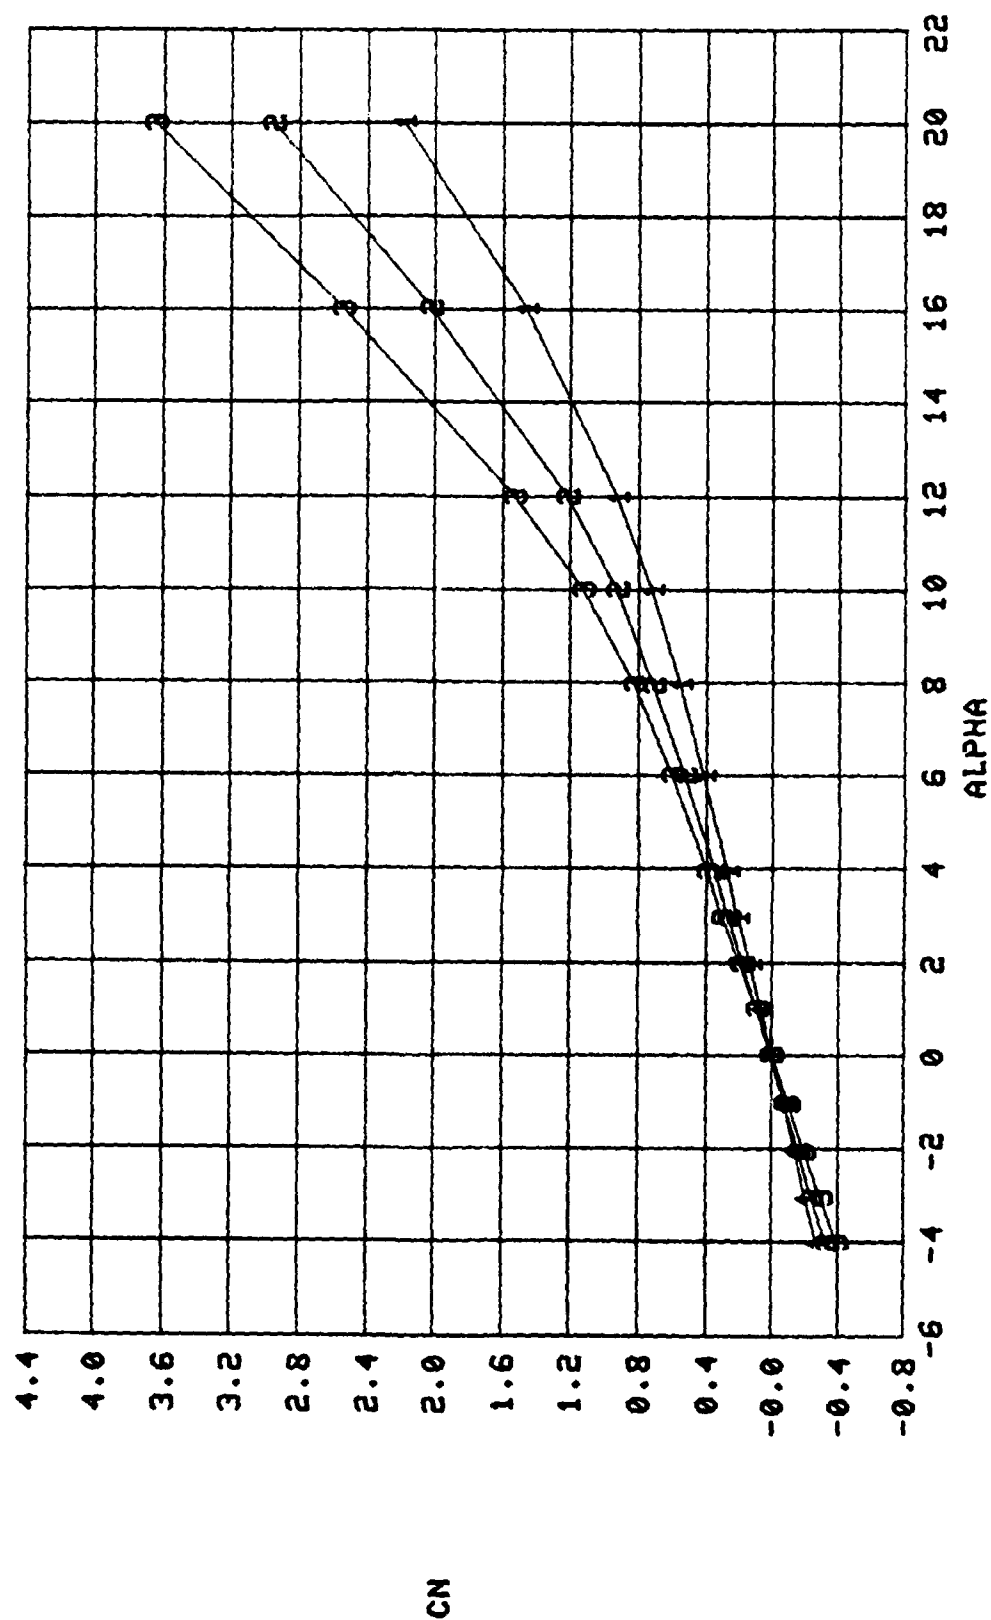


Figure 4. Typical Data Plot

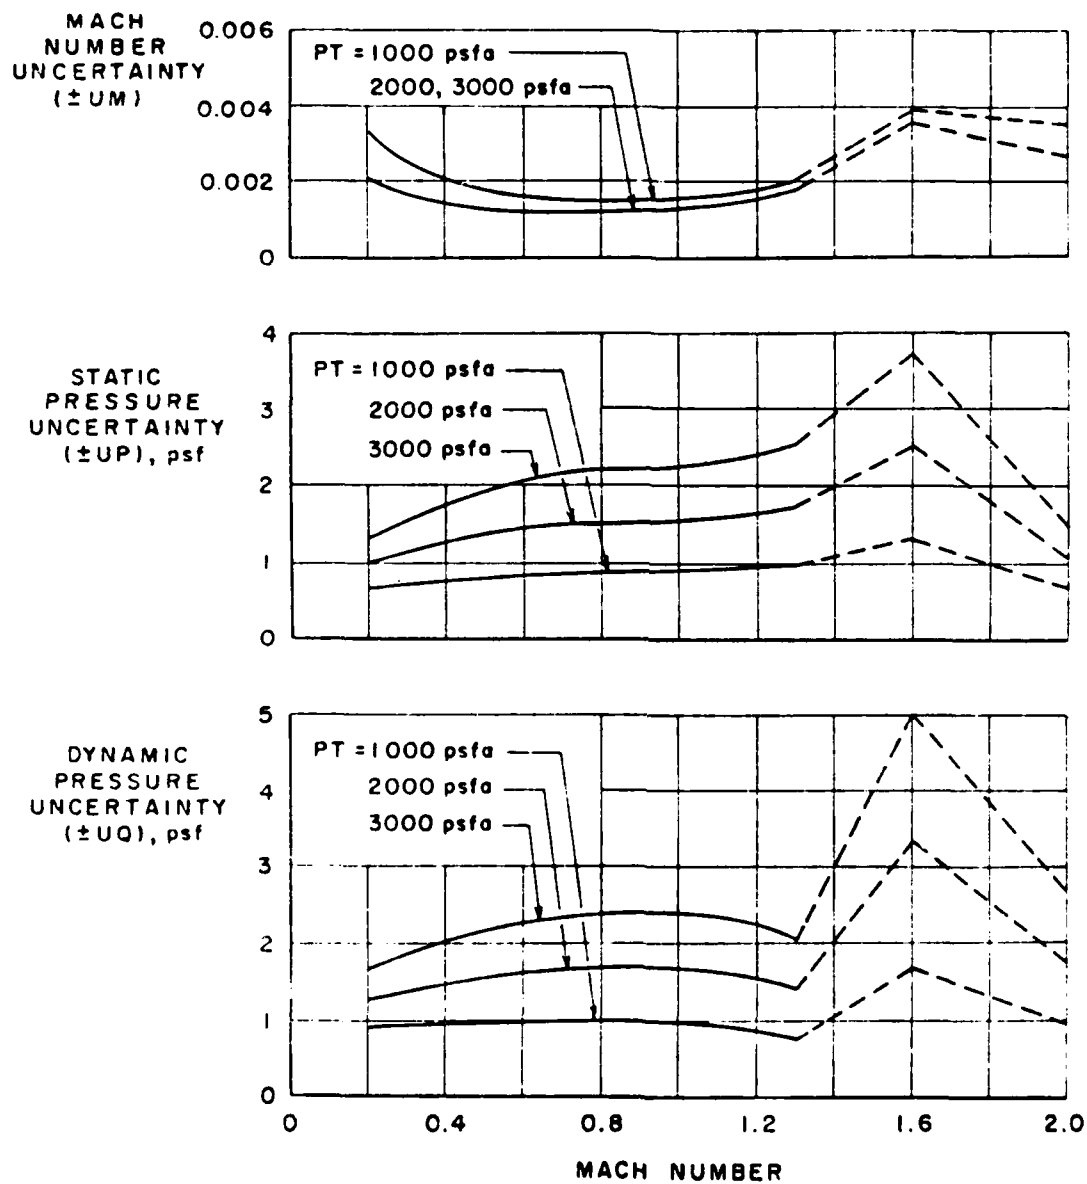


Figure 5. Estimated Uncertainties in 4T Tunnel Parameters

APPENDIX II

Tables

Table 1. Model Configuration Designation

<u>CONFIG</u>	<u>Description</u>
B20	2:1 elliptic body, $a_{\max} = 4.162$ in. $b_{\max} = 2.081$ in. $L = 8.323$ in.
B25	2.5:1 elliptic body, $a_{\max} = 4.654$ in. $b_{\max} = 1.862$ in. $L = 9.307$ in.
B30	3:1 elliptic body, $a_{\max} = 5.098$ in. $b_{\max} = 1.699$ in. $L = 10.195$ in.

Table 2. Nominal Test Conditions

M	PT	P	Q	RE x 10 ⁻⁶
0.4	2090	1872	210	2.37
0.55	1625	1324	281	2.40
0.8	1265	829	372	2.41
0.95	1174	659	414	2.39
1.05	1120	584	451	2.46
1.1	1120	524	444	2.36
1.2	1120	462	466	2.38
1.3	1120	405	479	2.37
1.3*	1170	424	500	2.47

* For CONFIG B30 only.

Table 3. Test Run Number Summary

CONFIG	ALPHA	BETA	M									
			0.4	0.55	0.8	0.95	1.05	1.1	1.2	1.3		
B20	A1	0	47	50	54	57	60	63	66	70		
			72									
B25	A1	0	48	51	55	58	61	64	67	71		
			82	84	86	88	90	92	94	96		
B30	A1	0	83	85	87	89	91	93	95	97		
			106	108	111	113	115	118	120	122	123	
		4	107	109	112	114	116	119	121	124		

Notes: ALPHA Schedule: A1= -4,-3,-2,-1,0,1,2,3,4,6,8,10,12,16,20 deg

Table 4. Estimated Uncertainties

a. CONFIG B20

PARAMETER	M							
	0.4	0.55	0.8	0.95	1.05	1.1	1.2	1.3
CN	0.070	0.060	0.038	0.034	0.032	0.031	0.030	0.029
CLM	0.029	0.025	0.015	0.014	0.013	0.013	0.012	0.012
CY	0.039	0.034	0.022	0.020	0.019	0.019	0.018	0.017
CLN	0.032	0.028	0.018	0.016	0.015	0.015	0.014	0.014
CLL	0.020	0.017	0.011	0.0099	0.0096	0.0093	0.0089	0.0086
CAT	0.014	0.012	0.0076	0.0068	0.0065	0.0063	0.0060	0.0059
CA	0.016	0.014	0.0086	0.0076	0.0073	0.0070	0.0067	0.0066
CAB	0.0088	0.0080	0.0041	0.0035	0.0032	0.0032	0.0030	0.0030

b. CONFIG B25

PARAMETER	M							
	0.4	0.55	0.8	0.95	1.05	1.1	1.2	1.3
CN	0.073	0.063	0.039	0.035	0.033	0.032	0.030	0.029
CLM	0.028	0.023	0.015	0.013	0.012	0.012	0.011	0.011
CY	0.039	0.034	0.022	0.020	0.019	0.018	0.018	0.017
CLN	0.032	0.028	0.018	0.016	0.015	0.015	0.014	0.014
CLL	0.020	0.017	0.011	0.0099	0.0096	0.0093	0.0088	0.0086
CAT	0.014	0.012	0.0076	0.0068	0.0065	0.0063	0.0060	0.0059
CA	0.016	0.014	0.0086	0.0076	0.0073	0.0070	0.0067	0.0066
CAB	0.0088	0.0080	0.0041	0.0035	0.0032	0.0032	0.0030	0.0030

Table 4. Concluded

C. CONFIG B30

PARAMETER	M									
	0.4	0.55	0.8	0.95	1.05	1.1	1.2	1.3		
CN	0.077	0.065	0.041	0.036	0.034	0.033	0.031	0.030		
CLM	0.027	0.023	0.014	0.012	0.012	0.011	0.011	0.010		
CY	0.039	0.034	0.022	0.020	0.019	0.018	0.018	0.017		
CIN	0.032	0.028	0.018	0.016	0.015	0.015	0.014	0.014		
CLL	0.020	0.017	0.011	0.0099	0.0096	0.0093	0.0088	0.0086		
CAT	0.014	0.012	0.0076	0.0068	0.0065	0.0063	0.0060	0.0059		
CA	0.016	0.014	0.0086	0.0076	0.0073	0.0070	0.0067	0.0066		
CAB	0.0088	0.0080	0.0041	0.0035	0.0032	0.0032	0.0030	0.0030		

APPENDIX III

Sample Tabulated Data

DATE: 2-85 PROJECT NO. P418-22
 ARVIN/ SPAN FIELD SERVICES, INC.
 AEDC DALLAS
 PROPULSION WIND TUNNEL
 ARNOLD AIR FORCE STATION, TENNESSEE

TEST TC-793 SUMMARY 1

RUN	M	PT	P	Q	REX10-6	TT	T	AFA	WIND/OFF	CONSET
50	0.550	1625.0	1322.8	280.4	2.399	557.7	525.8	-0.002	43/ 1	19

CONFIG A L LM AFVAL ELLIPTIC BODIES FORCE TEST

B20	0.18896	8.323	36.000
-----	---------	-------	--------

*** BODY AND STABILITY AXES DATA ***

PN	ALPHA	BETA	PHI	CN	CLM	CY	CLN	CLL	CAT	CAB	CA	NCP/LM	YCP/LM	CLS	CDS	(L/D)S
4	-4.00	0.01	-0.1	-0.271	-0.2028	0.004	-0.0016	-0.0003	0.2289	0.2199	0.0089	0.4939	0.7651	-0.270	0.028	-9.701
5	-3.03	0.01	-0.1	-0.202	-0.1537	0.004	-0.0013	-0.0003	0.2255	0.2151	0.0105	0.4909	0.7397	-0.201	0.021	-9.521
6	-2.04	0.00	-0.1	-0.133	-0.1039	0.003	-0.0017	-0.0003	0.2219	0.2117	0.0102	0.4860	0.8010	-0.133	0.015	-8.899
7	-1.02	0.00	-0.1	-0.063	-0.0526	0.002	-0.0018	-0.0003	0.2224	0.2090	0.0134	0.4742	0.8594	-0.063	0.015	-4.335
8	0.01	0.00	-0.1	0.004	-0.0022	0.003	-0.0009	-0.0001	0.2228	0.2050	0.0179	0.4953	0.7282	0.004	0.018	0.238
9	1.02	-0.00	-0.1	0.075	0.0492	0.004	-0.0002	0.0001	0.2235	0.2061	0.0164	0.5146	0.6767	0.074	0.018	4.198
10	1.99	-0.00	-0.1	0.142	0.0999	0.003	-0.0002	0.0001	0.2238	0.2076	0.0161	0.5046	0.6824	0.142	0.021	6.730
11	2.98	-0.01	-0.1	0.213	0.1494	0.003	0.0001	0.0002	0.2261	0.2079	0.0181	0.5045	0.6587	0.212	0.029	7.255
12	4.00	-0.01	-0.1	0.281	0.1981	0.004	0.0010	0.0002	0.2305	0.2212	0.0093	0.5035	0.6092	0.279	0.029	9.663
13	6.05	-0.01	-0.1	0.420	0.2991	0.004	0.0003	0.0005	0.2407	0.2400	0.0007	0.5022	0.6494	0.418	0.045	9.297
14	7.99	-0.01	-0.1	0.569	0.3979	0.003	0.0015	0.0004	0.2510	0.2652	-0.0142	0.5051	0.5621	0.566	0.065	8.699
15	10.03	-0.02	-0.1	0.746	0.5003	0.001	0.0011	0.0006	0.2523	0.2956	-0.0432	0.5116	0.3293	0.742	0.087	8.494
16	12.02	-0.02	-0.1	0.959	0.6003	0.001	0.0016	0.0011	0.2422	0.3081	-0.0669	0.5219	1.3169	0.952	0.134	7.097
17	16.07	-0.03	-0.1	1.529	0.8380	0.004	0.0037	0.0017	0.2097	0.3294	-0.1197	0.5399	0.8753	1.502	0.308	4.874
18	20.03	-0.03	-0.1	2.244	1.1789	-0.003	0.0037	0.0035	0.1707	0.3441	-0.1735	0.5452	0.9349	2.167	0.606	3.578

CN-A0	CLM-A0
0.0682	0.0504

Sample 1. Body- and Stability-Axes Data

DATE. 2-85 PROJECT NO. P41B-22
 ARVIN/ SPAN FIELD SERVICES, INC.
 AEDC DIVISION
 PROPULSION WIND TUNNEL
 ARNOLD AIR FORCE STATION, TENNESSEE

TEST TC-793 SUMMARY 2

RUN	M	PT	P	Q	REX10-6	TT	T	AFA	WIND/OFF	CONSET
50	0.550	1625.0	1322.8	280.4	2.399	557.7	525.8	-0.002	43/ 1	19

CONFIG	A	L	LM	AFWAL ELLIPTIC BODIES FORCE TEST
B20	0.18896	8.323	36.000	

PN	ALPHA	BETA	PHI	PBT/P	PBR/P	PBB/P	PBL/P	PBA/P
4	-4.00	0.01	-0.1	0.9597	0.9476	0.9588	0.9476	0.9534
5	-3.03	0.01	-0.1	0.9610	0.9485	0.9598	0.9480	0.9543
6	-2.04	0.00	-0.1	0.9623	0.9492	0.9605	0.9487	0.9552
7	-1.02	0.00	-0.1	0.9628	0.9496	0.9613	0.9489	0.9557
8	0.01	0.00	-0.1	0.9634	0.9509	0.9624	0.9500	0.9567
9	1.02	-0.00	-0.1	0.9628	0.9511	0.9627	0.9494	0.9565
10	1.99	-0.00	-0.1	0.9616	0.9509	0.9623	0.9491	0.9560
11	2.98	-0.01	-0.1	0.9613	0.9509	0.9621	0.9491	0.9559
12	4.00	-0.01	-0.1	0.9586	0.9486	0.9592	0.9466	0.9532
13	6.05	-0.01	-0.1	0.9538	0.9451	0.9546	0.9433	0.9492
14	7.99	-0.01	-0.1	0.9501	0.9380	0.9508	0.9354	0.9436
15	10.03	-0.02	-0.1	0.9465	0.9300	0.9474	0.9256	0.9374
16	12.02	-0.02	-0.1	0.9449	0.9264	0.9452	0.9218	0.9346
17	16.07	-0.03	-0.1	0.9422	0.9213	0.9376	0.9195	0.9301
18	20.03	-0.03	-0.1	0.9398	0.9182	0.9348	0.9159	0.9272

Sample 2. Base Pressure Data

END

FILMED

10-85

DTIC