

AD-A159 904

DYNAMIC CHARACTERISTICS OF THE 48-INCH WATER TUNNEL  
DRIVE PUMP(U) PENNSYLVANIA STATE UNIV UNIVERSITY PARK  
APPLIED RESEARCH LAB K RAVINDRA 26 AUG 85

1/1

UNCLASSIFIED


ARL/PSU/TM-85-149 N00024-79-C-6043

F/G 13/11

NL



END  
FORMED  
DTIC



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

6

DYNAMIC CHARACTERISTICS OF THE  
48-INCH WATER TUNNEL DRIVE PUMP

K. Ravindra

AD-A159 904

Technical Memorandum  
File No. TM 85-149  
26 August 1985  
Contract N00024-79-C-6043

Copy No. 4

The Pennsylvania State University  
Intercollege Research Programs and Facilities  
APPLIED RESEARCH LABORATORY  
Post Office Box 30  
State College, Pa. 16804

DTIC  
ELECTE  
OCT 7 1985  
S D  
A B

DTIC FILE COPY

NAVY DEPARTMENT  
NAVAL SEA SYSTEMS COMMAND

DISTRIBUTION STATEMENT A  
Approved for public release  
Distribution Unlimited

85 10 7 079

DYNAMIC CHARACTERISTICS OF THE  
48-INCH WATER TUNNEL DRIVE PUMP

K. Ravindra

Technical Memorandum  
File No. TM 85-149  
26 August 1985  
Contract N00024-79-C-6043

Copy No. 4

The Pennsylvania State University  
Intercollege Research Programs and Facilities  
APPLIED RESEARCH LABORATORY  
Post Office Box 30  
State College, PA 16804

Approved for Public Release  
Distribution Unlimited

NAVY DEPARTMENT

NAVAL SEA SYSTEMS COMMAND

DTIC  
ELECTE  
S OCT 7 1985 D  
B

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER TM 85-149	2. GOVT ACCESSION NO. <b>AD-A159 904</b>	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DYNAMIC CHARACTERISTICS OF THE 48-INCH WATER TUNNEL DRIVE PUMP		5. TYPE OF REPORT & PERIOD COVERED Technical Memorandum
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) K. Ravindra		8. CONTRACT OR GRANT NUMBER(s) N00024-85-C-6041
9. PERFORMING ORGANIZATION NAME AND ADDRESS Applied Research Laboratory Penn State University, P. O. Box 30 State College, PA 16804		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Sea Systems Command, Code NSEA 63R-14 Department of the Navy Washington, DC 20362		12. REPORT DATE 26 August 1985
		13. NUMBER OF PAGES 14
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release. Distribution unlimited. Per NAVSEA - 19 September 1985.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES  - 1/2 K		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) propeller surge response, cascades unsteady flow		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) In this report, the dynamic characteristics of the 48-inch water tunnel drive pump are determined using the theory of unsteady flow around a two-dimensional cascade of airfoils developed by Ohashi [1]. This analysis assumes that the axial surge velocity is uniform across the face of the impeller.		

DD FORM 1473  
1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

cont

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

It is found that the magnitude plot of the dynamic characteristics is similar to that of a simple control lag element whereas the phase plot looks quite different. The solidity of the rotor in the present analysis need not be large as assumed in previous investigations. Keywords:

FLD 19



Accession For	
NTIS GRSI	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

From: K. Ravindra

Subject: Dynamic Characteristics of the 48-Inch Water Tunnel Drive Pump

References: See p. 9

Abstract: In this report, the dynamic characteristics of the 48-inch water tunnel drive pump are determined using the theory of unsteady flow around a two-dimensional cascade of airfoils developed by Ohashi [1]. This analysis assumes that the axial surge velocity is uniform across the face of the impeller.

It is found that the magnitude plot of the dynamic characteristics is similar to that of a simple control lag element whereas the phase plot looks quite different. The solidity of the rotor in the present analysis need not be large as assumed in previous investigations.

Acknowledgment: This work was performed as part of the E/F Project 6171 entitled, "Experimental and Analytical Study of Nonsteady Forces on Super-cavitating Hydrofoils."

Nomenclature

C	Coupling function, Eq. (2)
F	Gauss's hypergeometric function, Eq. (3)
H	Dynamic transfer function
$\bar{H}$	Normalized dynamic transfer function
$N_R$	Number of blades on rotor
$v_{a_0}$	Steady axial velocity
$Q_0$	Steady volume flow rate through the pump
<hr/>	
i	- 1
f	Frequency of fluctuations, Hz
n	Rotational speed of turbopump
t	Time
u	Velocity of the rotor cascade
<hr/>	
$\Delta p_R$	Unsteady pressure rise through the rotor
$\Delta p_S$	Unsteady pressure rise through the stator
$\Delta v_a$	Amplitude of axial velocity fluctuations
<hr/>	
$\rho$	Density of the liquid
$\lambda_R$	Stagger angle of rotor
$\sigma_R$	Solidity of rotor = chord of blade/spacing of blades
$\omega_R$	Reduced frequency = $f \cos \lambda_R / N_R \phi n$
$\nu$	Frequency of fluctuations, radians/sec
$\phi$	Flow coefficient = $v_{a_0} / n$
$\Gamma$	Gamma function

### Introduction

Nonsteady cavity flow tests conducted in a closed circuit water tunnel are thought to induce pressure surges in the tunnel circuit thus invalidating the test results [2]. There has been sufficient interest generated [2,4,5] to warrant understanding and analyzing the water tunnel circuit as a dynamic system. Indeed, although many investigators have observed and mentioned the existence of pressure surges in closed circuit water tunnels [2,4,5], there appears to be no systematic study that has been performed to understand the possible existence of pressure surges and to quantify the surge phenomenon (if it exists) so a correction procedure can be adopted for nonsteady cavity flow test data obtained from closed circuit water tunnel tests.

The components of the water tunnel circuit that affect the dynamic behavior of the tunnel circuit have been identified [3] as:

- (i) Unsteady cavity motion in the test section.
- (ii) Phase shift in the unsteady disturbance due to the tunnel circuit.
- (iii) The dynamic characteristics of the tunnel drive pump.
- (iv) The pressure control loop involving the differential pressure transducer at the test section, the pressure regulating tank and the controllers.

In this memorandum, the dynamic characteristics of the 48-inch water tunnel drive pump are determined using the theory of unsteady flow around a two-dimensional, linear cascade of airfoils developed by Ohashi [1]. The results obtained show some interesting features that could be important in the dynamic analysis of the water tunnel circuit.

### Description of the Tunnel Drive Pump

The axial flow pump of the 48-inch water tunnel at the Garfield Thomas Water Tunnel consists of a four bladed impeller 95 inches in diameter with flow straightening vanes ahead of and behind the impeller. The impeller is driven by a variable speed motor. The speed can be varied continuously from 0 to 180 rpm. The blades of the impeller may be adjusted over approximately 28 degrees [6]. The solidity of the impeller is about 1.0.

### Analysis

The relationship between the pressure rise across the pump and the flow rate is indicated by the characteristic curve of the pump. This characteristic curve is valid only when the pump operates in the steady state condition, that is, with a constant flow rate. When the flow rate fluctuates, the pressure rise will not respond fast enough to follow along the steady state characteristic curve.

The dynamic characteristics describe a relation between the fluctuating volume flow rate at the inlet to the pump and the fluctuating pressure rise across the pump, as a function of the frequency of fluctuations. Both amplitude and phase relations have to be obtained for a meaningful use of the dynamic characteristics.

It is assumed that [1]

- (i) The flow is a two-dimensional cascade flow for each blade element and it is inviscid, incompressible and non-cavitating.
- (ii) The angular momentum of the inlet flow into the rotor is steady.
- (iii) The unsteadiness is periodic.

(iv) The increase of velocity head at the outlet edge of the rotor is converted into pressure rise in the following stator or diffuser without any time delay.

The unsteady pressure rise through the rotor and stator is given by

[1],

$$\frac{\Delta p_R + \Delta p_S}{\rho} = -u \Delta V_a \frac{\tan \lambda_R [1 - \exp(-\pi \sigma_R)]}{1 + i \omega_R C(\omega_R, \sigma_R)} e^{i \nu t}, \quad (1)$$

where

$\Delta p_R$  = Unsteady pressure rise through the rotor

$\Delta p_S$  = Unsteady pressure rise through the stator

$\rho$  = Density of the liquid

$u$  = Velocity of the rotor cascade

$\Delta V_a$  = Amplitude of axial velocity fluctuations

$\lambda_R$  = Stagger angle of rotor

$\sigma_R$  = Solidity of rotor = chord of blade/spacing of blades

$\omega_R$  = Reduced frequency =  $f \cos \lambda_R / N_R \phi n$

$f$  = Frequency of fluctuations, Hz

$\nu$  =  $2\pi f$  = Frequency of fluctuations, radians/sec

$t$  = time

$i$  = -1

$n$  = Rotational speed of turbopump

$N_R$  = Number of blades on rotor

$\phi$  = Flow coefficient =  $V_a / n$

$V_{a_0}$  = Steady axial velocity .

And  $C(\omega_R, \sigma_R)$  the coupling function given by [1] is

$$C(\omega_R, \sigma_R) = -\frac{i}{\omega_R} \left[ \pi \frac{\Gamma(1 + i\omega_R)}{\Gamma(\frac{1}{2} + i\omega_R)} - 1 \right] + \frac{\pi \Gamma(i\omega_R)}{\Gamma(\frac{1}{2} + i\omega_R)} \left[ F\left(-\frac{1}{2}, i\omega_R; \frac{1}{2} + i\omega_R; \exp(-2\pi\sigma_R)\right) - 1 \right] , \quad (2)$$

where  $\Gamma$  = Gamma function and  $F(a, b, c, z)$  is the Gauss's hypergeometric function given by

$$F(a, b, c, z) = \sum_{n=0}^{\infty} \frac{(a)_n (b)_n}{(c)_n n!} z^n , \quad c \neq 0, -1, -2, \dots \quad (3)$$

where

$$(a)_n = \frac{\Gamma(a+n)}{\Gamma(a)} \quad (4)$$

$$(b)_n = \frac{\Gamma(b+n)}{\Gamma(b)} \quad (5)$$

$$(c)_n = \frac{\Gamma(c+n)}{\Gamma(c)} . \quad (6)$$

The dimensionless form of unsteady pressure rise is given by

$$h_{R+S} = \frac{\Delta p_R + \Delta p_S}{1/2\rho u^2} = \frac{-2 \tan \lambda_R [1 - \exp(-\pi\sigma_R)]}{1 + i\omega_R C(\omega_R, \sigma_R)} \frac{\Delta Q}{Q_0} \phi e^{i\omega t} , \quad (7)$$

where

$\Delta Q_0$  = Amplitude of unsteady volume flow rate through the pump

$Q_0$  = Steady volume flow rate through the pump

The dynamic transfer function  $H(\omega)$  is therefore given by

$$H(\omega) = \frac{h_{R+S}(t)}{(\Delta Q(t)/Q_0)} = \frac{-2 \tan \lambda_R [1 - \exp(-\pi \sigma_R)]}{1 + i\omega_R C(\omega_R, \sigma_R)} \phi, \quad (8)$$

where  $\Delta Q(t) = \Delta Q_0 e^{i\omega t}$ . When there are no fluctuations in volume flow rate, the quasi steady limit is given by

$$(h_{R+S})_{qS} = -2 \tan \lambda_R (1 - \exp(-\pi \sigma_R)) \frac{\Delta Q_0}{Q_0} \phi \exp(i\omega t). \quad (9)$$

We may now form the ratio,

$$\bar{H}(\omega) = \frac{h_{R+S}}{(h_{R+S})_{qS}} = \frac{1}{1 + i\omega_R C(\omega_R, \sigma_R)}. \quad (10)$$

Evaluation of the coupling function  $C(\omega_R, \sigma_R)$  requires the use of Gamma function with complex argument. A series expansion [7] given by

$$\Gamma(z) = e^{-z} z^{z-1/2} (2\pi)^{1/2} \left[ 1 + \frac{1}{12z} + \frac{1}{288z^2} - \frac{139}{51840z^3} - \frac{571}{2488320z^4} + \frac{163879}{209018880z^5} + \frac{5246819}{75246796800z^6} - \frac{534703531}{902961561600z^7} \right], \quad (11)$$

is made use of in evaluating the hypergeometric function  $F$ .

### Results and Discussion

The ratio in Eq. (10) which does not contain the simplifications of Ref. [1] is evaluated using the series expansion for  $\Gamma(z)$ . The result is plotted as a function of frequency  $\omega_R$  in Fig. 1. The amplitude plot, viz.,  $20 \log(h/h_{qS})$  is flat up to the break frequency and then falls off at approximately 3 dB per octave. Up to about the break frequency, the relation between the flow rate and pressure rise can be expressed by the usual steady state characteristic curve. On the other hand, at frequencies above  $\omega_R = 70$ , the fluctuation of pressure rise is negligible even though the flow rate fluctuates periodically. An observation of the magnitude plot reveals that it is similar in shape to that of a first order control lag element (of the form  $K/(\tau s + 1)$ ) with a break frequency at  $\omega_R = 0.7$ . However, the phase plot of the dynamic characteristics (Fig. 1) is quite different from that of a first order system. The phase angle (between the flow fluctuation and pressure rise fluctuation) decreases as the frequency increases until the break frequency; then it increases and reaches an asymptotic value of zero for large frequencies.

In the proposed transient analysis of the water tunnel circuit, various components of the circuit that influence the flow dynamics are modeled as point elements. As noted in the present Introduction, the transfer function for each element is then utilized in writing the boundary conditions for that element. Since the dynamic characteristics of the tunnel drive pump are available from the present analysis, the pump can be fully represented in such a transient analysis.

References

1. Ohashi, H., "Analytical and Experimental Study of Dynamic Characteristics of Turbopumps," NASA TN D-4298 (April 1968).
2. Parkin, B. R., Private Communication (March 1976).
3. Parkin, B. R., Private Communication (1976).
4. Wu, Yao-Tsu, "Cavity and Wake Flows," Annual Review of Fluid Mechanics 4:276 (1972).
5. Acosta, A. J. and R. K. Delong, "Experimental Investigation of Nonsteady Forces on Hydrofoils Oscillating in Heave," Proceedings of the IUTAM Symposium held in Leningrad, p. 101 (1971).
6. Lehman, A. F., "The Garfield Thomas Water Tunnel," ORL Report No. NOrd 16597-56 (September 1959).
7. National Bureau of Standards, U.S. Department of Commerce, Table of Gamma Functions for Complex Arguments, NBS Applied Mathematics Series, Vol. 34, U.S. Dept. of Commerce, Washington, DC (1954).

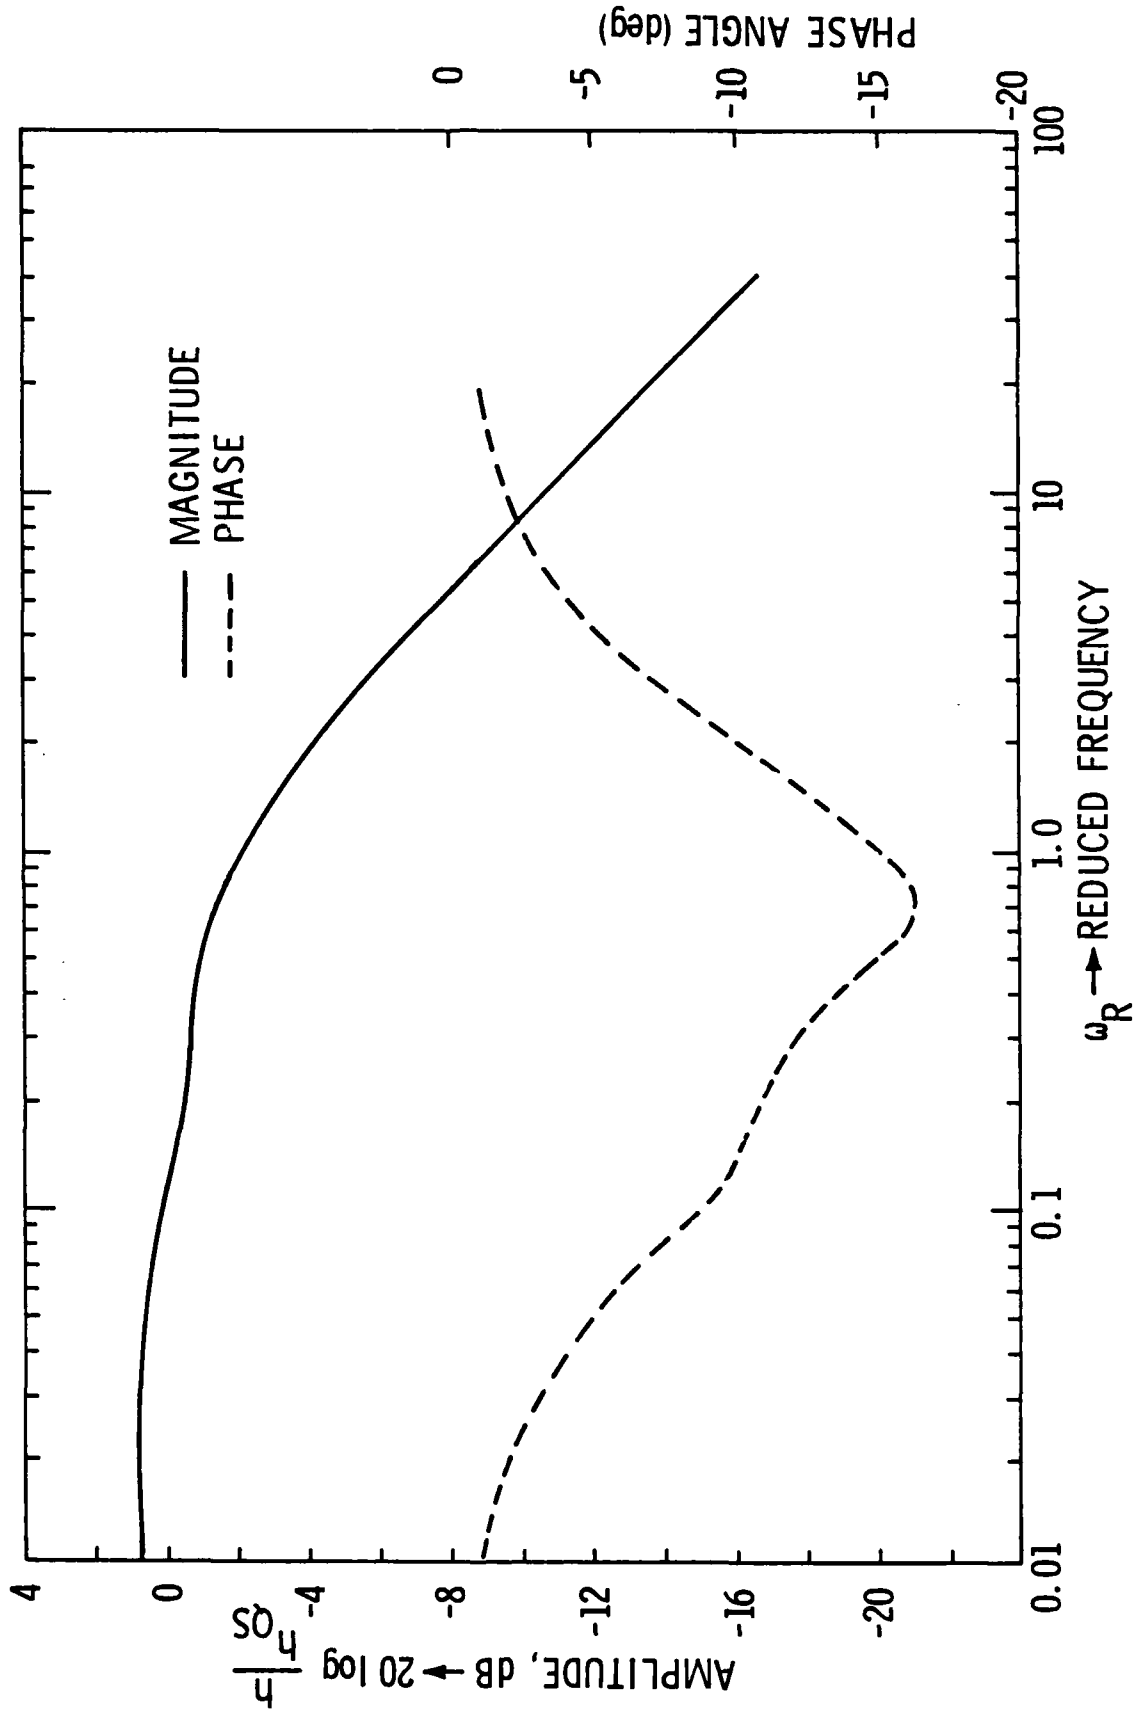


Figure 1. Dynamic Characteristics of 48-Inch Tunnel Drive Pump.

DISTRIBUTION LIST FOR UNCLASSIFIED TECHNICAL MEMORANDUM 85-149,  
by K. Ravindra, dated 26 August 1985

Defense Technical Information  
Center  
5010 Duke Street  
Cameron Station  
Alexandria, VA 22314  
(Copies 1 through 6)

Commander  
David W. Taylor Naval Ship  
Research & Development Ctr.  
Department of the Navy  
Bethesda, MD 20084  
Attn: J. H. McCarthy  
Code 1540  
(Copy No. 7)

Commander  
David W. Taylor Naval Ship  
Research & Development Ctr.  
Department of the Navy  
Bethesda, MD 20084  
Attn: R. S. Rothblum  
Code 1503  
(Copy No. 8)

Commander  
Naval Sea Systems Command  
Department of the Navy  
Washington, DC 20362  
Attn: T. E. Peirce  
Code NSEA 63R-31  
(Copy No. 9)

Commander  
Naval Sea Systems Command  
Department of the Navy  
Washington, DC 20362  
Attn: A. R. Paladino  
Code NSEA 55N  
(Copy No. 10)

Dr. J. Kerwin  
Department of Ocean Engineering  
Massachusetts Institute of Technology  
77 Massachusetts Avenue  
Cambridge, MA 02139  
(Copy No. 11)

Mr. K. Ravindra  
Dowling College  
Oakdale, Long Island  
New York 11769  
(Copies 12 & 13)

Director  
Applied Research Laboratory  
The Pennsylvania State University  
Post Office Box 30  
State College, PA 16804  
Attn: R. E. Henderson  
(Copy No. 14)

Director  
Applied Research Laboratory  
The Pennsylvania State University  
Post Office Box 30  
State College, PA 16804  
Attn: B. R. Parkin  
(Copy No. 15)

Director  
Applied Research Laboratory  
The Pennsylvania State University  
Post Office Box 30  
State College, PA 16804  
Attn: D. E. Thompson  
(Copy No. 16)

Director  
Applied Research Laboratory  
The Pennsylvania State University  
Post Office Box 30  
State College, PA 16804  
Attn: GTWT Files  
(Copy No. 17)

Director  
Applied Research Laboratory  
The Pennsylvania State University  
Post Office Box 30  
State College, PA 16804  
Attn: ARL/PSU Library  
(Copy No. 18)

**END**

**FILMED**

11-85

**DTIC**