

AD-A169 045


CONCEPT STUDY - VEHICLE WASTE DISPOSAL SYSTEM(U) OLIS
ENGINEERING SEDALIA CO C K LORD 28 JAN 86
TACOM-TR-13155 DRAE07-85-C-R089


1/1

UNCLASSIFIED

F/G 13/6

NL

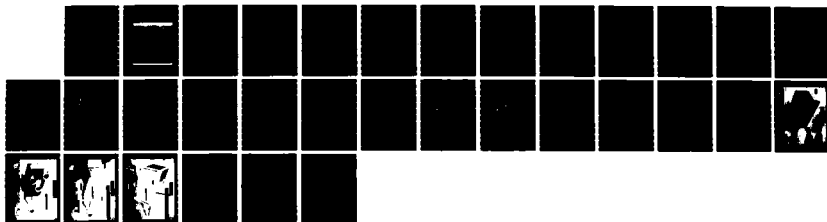



MIRRORE

1000

AD-A169 045

RD & E

C E N T E R

Technical Report

No. 13155

CONCEPT STUDY-
VEHICLE WASTE DISPOSAL SYSTEM
(PHASE I)

CONTRACT NUMBER DAAE07-85-C-R089

JANUARY 1986

Carter K. Lord

OLIS Engineering,
a division of OLIS Enterprises, Inc.
P.O. Drawer 408 D

By Sedalia, Colorado 80135

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED

U.S. ARMY TANK-AUTOMOTIVE COMMAND
RESEARCH, DEVELOPMENT & ENGINEERING CENTER
Warren, Michigan 48397-5000

DTIC FILE COPY

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

AD-A169045

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS None		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for Public Release: Distribution is Unlimited		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S)			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION OLIS Engineering, a division of OLIS Enterprises, Inc.		6b. OFFICE SYMBOL (if applicable) N/A	7a. NAME OF MONITORING ORGANIZATION DCASMA - DENVER		
6c. ADDRESS (City, State, and ZIP Code) P.O. Drawer 408 D 2433 N. Perry Park Rd. Sedalia, Colorado 80135			7b. ADDRESS (City, State, and ZIP Code) 701 W. Hampden Ave., Suite E3210 Englewood, Colorado 80154-1044		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION U.S. Army Tank- Automotive Command, R&D Center		8b. OFFICE SYMBOL (if applicable) AMSTA -NR	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c. ADDRESS (City, State, and ZIP Code) TACOM Warren, Michigan 48397-5000			10. SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.
11. TITLE (Include Security Classification) CONCEPT STUDY - VEHICLE WASTE DISPOSAL SYSTEM					
12. PERSONAL AUTHOR(S) Carter K. Lord					
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM 85/08/01 TO 86/01/28		14. DATE OF REPORT (Year, Month, Day) 86/01/28	
15. PAGE COUNT 46					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Waste Disposal System, Vehicle Mounted, NBC environment		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) This concept study was initiated to investigate the feasibility of developing a waste disposal system to process and dispose of human waste generated in combat vehicles operating in a nuclear, biological, and chemical (NBC) contaminated environment.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT. ☐ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Moshin Singapore			22b. TELEPHONE (Include Area Code) (313) 574-5373		22c. OFFICE SYMBOL AMSTA - NR




TABLE OF CONTENTS

Section	Page
1.0. INTRODUCTION	7
2.0. OBJECTIVE	7
3.0. CONCLUSIONS	7
4.0. RECOMMENDATIONS.	7
4.1. <u>Bench Model Testing.</u>	8
4.2. <u>Development Unit Design.</u>	8
4.2.1. WPU Development Unit.	8
4.2.2. Waste Disposal Port Design.	8
4.2.3. Marine WPU Development Unit	8
4.3. <u>Development Unit Fabrication</u>	8
4.4. <u>Development Unit Testing</u>	8
4.5. <u>Operation Manual</u>	8
4.6. <u>Refurbishment and Installation</u>	8
4.7. <u>Commercial Development</u>	10
5.0. DISCUSSION	10
5.1. <u>Description of Work.</u>	10
5.2. <u>Project Results.</u>	11
SELECTED BIBLIOGRAPHY	13
APPENDIX A. CONCEPT DEFINITION SHEETS	A-1
APPENDIX B. BENCH MODEL AND BENCH MODEL TEST RESULTS.	B-1
DISTRIBUTION LIST	Dist-1

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

A-1

3

LIST OF ILLUSTRATIONS

Figure	Title	Page
4-1.	Bench Model WPU - Recommended Modifications.	9



1.0. INTRODUCTION

This final technical report was prepared by OLIS Engineering, a division of OLIS Enterprises, Inc., for the U.S. Army Tank-Automotive Command (TACOM) under Contract DAAE07-85-C-R089. It describes the Phase I concept study which was performed for the specific purpose of defining a viable approach to providing an efficient means of disposing of human waste generated within combat vehicles while operating in a nuclear, biologically, or chemically (NBC) contaminated environment. The research performed resulted in the preliminary design of a waste processing unit which has been shown to be feasible both in concept and application. The unit, when fully developed, will be capable of meeting the requirements identified for a waste disposal system for combat vehicles.

2.0. OBJECTIVE

The primary objective of Phase I of this research was to define a waste disposal system for combat vehicles operating in an NBC contaminated environment. A system is needed which will safely and efficiently process and dispose of the human waste generated within the confines of a combat vehicle operating under conditions which prohibit opening the vehicle to dispose of the generated waste. As space, power, and water are extremely limited in the types of vehicles under consideration, concepts were defined which require a minimum of those commodities. While developing a viable waste disposal system for this specific application, it was also a goal of this research to identify and pursue any possible commercial applications of the systems defined.

3.0. CONCLUSIONS

The research performed under Phase I of this contract has identified a viable approach to the efficient disposal of human waste from within a combat vehicle operating in an NBC environment with minimum impact to the vehicle or to the personnel operating within that vehicle. The feasibility of the approach has been demonstrated both by analysis and preliminary testing. With further development, the concept defined should be capable of meeting the requirements identified for this application, as well as possible commercial applications identified by this study.

4.0. RECOMMENDATIONS

Based on the results of Phase I of this concept study, the following plan for development of a concept Waste Processing Unit (WPU) is recommended. The primary purpose of this work will be to develop a WPU capable of being installed and utilized in a concept combat vehicle, specifically the Concept Command Post Vehicle (CCPV) currently under development.

4.1. Bench Model Testing

Testing of the existing bench model (with recommended modifications, see Figure 4-1) should be performed under simulated operating conditions to determine performance, operational problems, etc., and to identify any required design modifications.

4.2. Development Unit Design

4.2.1. WPU Development Unit. A Development Unit of the WPU to fit within the confines of the CCPV, to be powered by a portion of the exhaust from the Auxiliary Power Unit (APU) of that vehicle needs to be designed. The results of the bench model testing should be used in the design.

4.2.2. Waste Disposal Port (WDP) Design. A WDP for the WPU to permit depositing bagged waste into the unit while operating also needs to be designed. It must provide interlocks to prevent opening the WDP when the APU is not functioning.

4.2.3. Marine WPU Development Unit. We also recommend designing a development model of the WPU for the specific application of processing waste from a marine head.

4.3. Development Unit Fabrication

Following completion of the recommended design effort specified above, the Development Unit WPU's and required support hardware for testing (an efficient test stand is strongly recommended) should be fabricated.

4.4. Development Unit Testing


Development testing of the WPU and WDP should be performed under simulated actual conditions to verify operational performance and characteristics.

4.5. Operational Manual

An operational manual should be prepared to clearly identify the proper procedures for the use of an installed WPU based on the testing of the WPU Development Units.

4.6. Refurbishment and Installation

Following the completion of all development testing, the WPU and WDP Development Units should be refurbished as required in preparation for field testing. The hardware required to install the WPU and WDP into the CCPV should be designed and fabricated, and the refurbished WPU and WDP Development Units should then be installed on the CCPV for field testing as specified by TACOM.

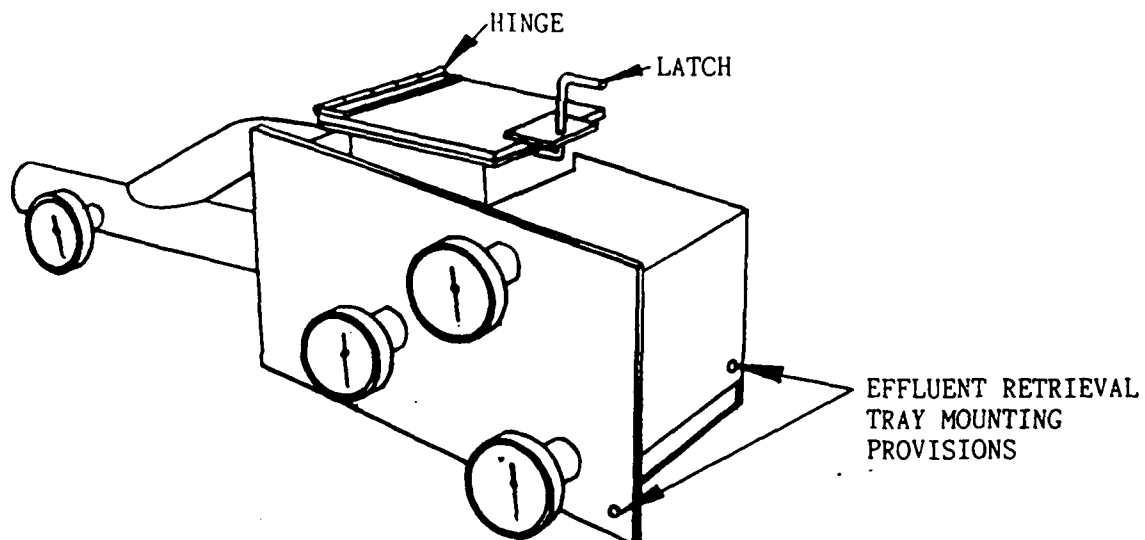

1. Add hinge and latch to waste dump chute to facilitate loading unit when hot.
2. Add provisions for attaching an effluent retrieval tray.
3. (Not Shown) Use bench model to evaluate candidate insulation materials.

Figure 4-1. Bench Model WPU - Recommended Modifications

4.7. Commercial Development

It is recommended that the Marine WPU be developed and tested to a level permitting presentation to the public market (advertising) for use in various pleasure boats and commercial fishing fleets. Many commercial applications of the standard WPU exist also, and those should be developed to their maximum potential.

5.0. DISCUSSION

5.1. Description of Work

To define a viable vehicle waste disposal system for combat vehicles operating in an NBC contaminated environment, the following work was performed.

5.1.1. Concept Definition. Several concepts of vehicle waste disposal systems were defined by the principal investigator, and developed to a level which permitted evaluation of the concepts with respect to feasibility, reliability, power requirements, adaptability to different vehicle systems, ability to process expected types and quantities of waste material, and cost. Waste collection and storage systems, waste collection and disposal systems, and waste processing and disposal systems were considered. Wherever possible, existing technology was used in the conceptual designs. Possible commercial applications of the concepts defined were identified during the course of the study, and are currently being pursued further. Concepts defined for evaluation are shown in APPENDIX A.

5.1.2. Concept Evaluation. The conceptual designs of the vehicle waste disposal systems developed were evaluated by the principal investigator and staff at OLIS Engineering to determine specific projected characteristics of each concept. Existing systems and modified existing systems were included in this evaluation.

5.1.3. Working Model Fabrication/Evaluation. A working model of the WPU, concept 9, was fabricated to demonstrate the feasibility of the approach. It is stressed that this unit is a working model, or bench model, for concept demonstration and evaluation purposes only, and is not intended to be installed into a vehicle for testing. The bench model WPU is shown in APPENDIX B, as are the results of the preliminary testing performed.

5.1.4. Research Plan. Based on the results of the research performed during Phase I of the study, recommendations for the further development of the most promising concepts defined were made, and are presented in Section 4.0. of this report. The recommendations identify specific areas which, in the estimation of the research staff, will require further detailed analysis or definition, and define a specific approach to the development of the concept to an operational level.

5.2 Project Results

A total of nine concept vehicle waste disposal systems were defined and evaluated by this study (see APPENDIX A). As a result of the trade study performed, and discussions with the TACOM staff cognizant of this research, the most attractive concept for this specific application is a unit which incinerates the human waste generated and disposes of the ash through the APU exhaust system. The concept WPU uses no vehicle power or ancillary equipment. Its sole power source is the waste heat and airflow supplied by the APU exhaust system.

A bench model of the concept WPU was fabricated at OLIS Engineering. Preliminary testing was started prior to the completion of Phase I of the study. Preliminary results of the testing indicate that not only will the WPU concept function efficiently when powered by the exhaust from the APU of the CCPV (a Garret turbine engine with an exhaust temperature of approximately 1200°F), but will also operate when powered by the exhaust from a standard (6 cylinder automotive type) gasoline internal combustion engine. These data permit further investigation of a promising possible commercial and military application of the concept-- waste processing aboard various marine craft. Current laws in many areas require pleasure craft and commercial fleets to chlorinate and macerate human waste before dumping into the local waters. Macerators currently available are inefficient, and are reported to be unreliable. A WPU, installed in the exhaust system of a boat, and receiving waste from a standard marine head, would effectively allow chlorinated liquid waste to pass through the system, while retaining solids for incineration by the engine exhaust.

Following completion of Phase I of the research, a research plan was prepared to identify the recommended approach to further development of the concept WPU into an operational unit, with both military and commercial applications. The research plan is summarized in this report in Section 4.0., and specifies further testing of the bench model WPU, as well as design, fabrication, and testing of a more advanced prototype unit with an efficient waste delivery system for the specific application of the CCPV. It is anticipated that further development of the WPU concept can also result in a simpler, more efficient approach to introducing the waste into the WPU than the baffled dump chute currently shown; this effort is also recommended.


SELECTED BIBLIOGRAPHY

Lord, C.K., "Background Data Report for Concept Study - Vehicle Waste Disposal System", OLIS Engineering, Sedalia, CO (1985)



APPENDIX A
CONCEPT DEFINITION SHEETS

CONCEPT #1 - BAFFLED DUMP SYSTEM

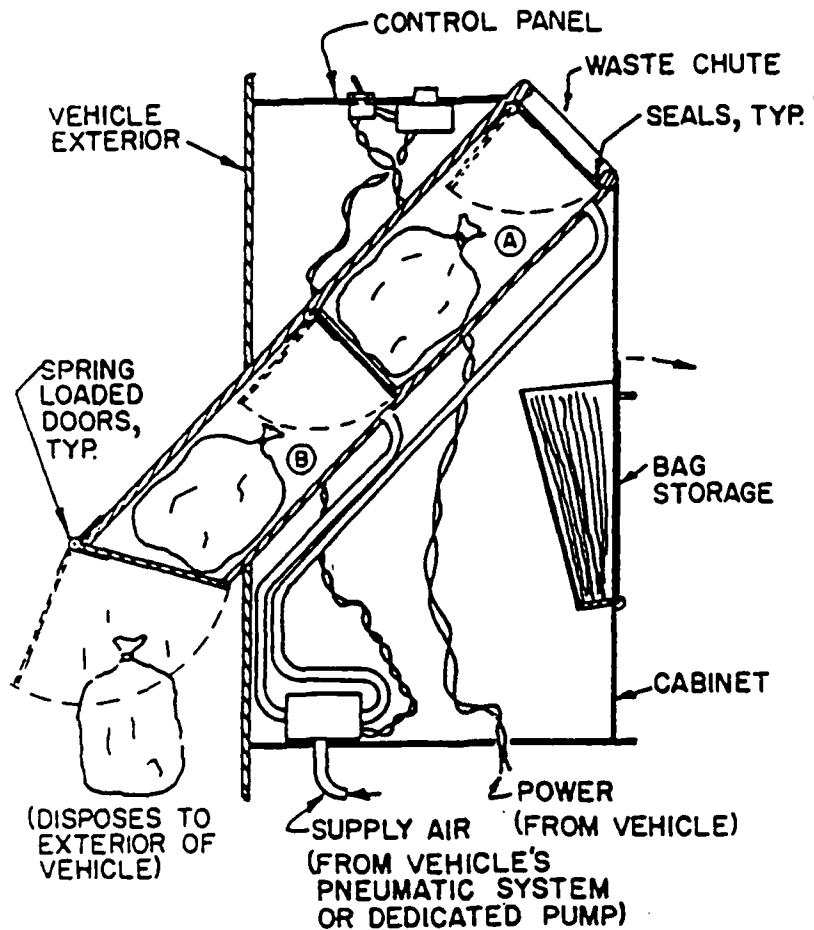

OPERATIONAL SEQUENCE

- 1) WASTE IS PLACED IN PLASTIC BAG AND BAG IS CLOSED WITH WIRE TIE.
- 2) FILLED BAG IS PLACED IN COMPARTMENT A
- 3) WHEN "OPERATE" BUTTON IS PRESSED, UNIT AUTOMATICALLY CYCLES AS FOLLOWS:
 - a) COMPARTMENT B PURGE
 - b) PRESSURIZE COMPARTMENT A, TRANSFERRING WASTE TO COMPARTMENT B.
 - c) PRESSURIZE COMPARTMENT B, DISPOSING OF WASTE.
 - d) PURGE COMPARTMENT A, WHICH AUTOMATICALLY PURGES COMPARTMENT B.
 - e) UNIT SHUT DOWN.

ADVANTAGES:


- ° LOW POWER REQUIREMENTS
- ° HIGH CAPACITY (LIMITED ONLY BY BAG SUPPLY)
- ° SIMPLE OPERATION
- ° HANDLES ALL TYPES OF WASTE TO BE ENCOUNTERED
- ° DOES NOT REQUIRE PERSONNEL TO LEAVE VEHICLE TO EMPTY SYSTEM
- ° LOW TECHNICAL RISK
- ° LOW MAINTENANCE REQUIREMENTS
- ° LOW COST

DISADVANTAGES


- ° WASTE IS DEPOSITED DIRECTLY ON GROUND (CAUSING PROBLEMS DURING NON-COMBAT OPERATION, AND POSSIBLY PERMITTING TRACKING OF VEHICLE MOVEMENTS DURING COMBAT)

CONCEPT #1 - BAFFLED DUMP SYSTEM

ALTERNATE CONFIGURATION

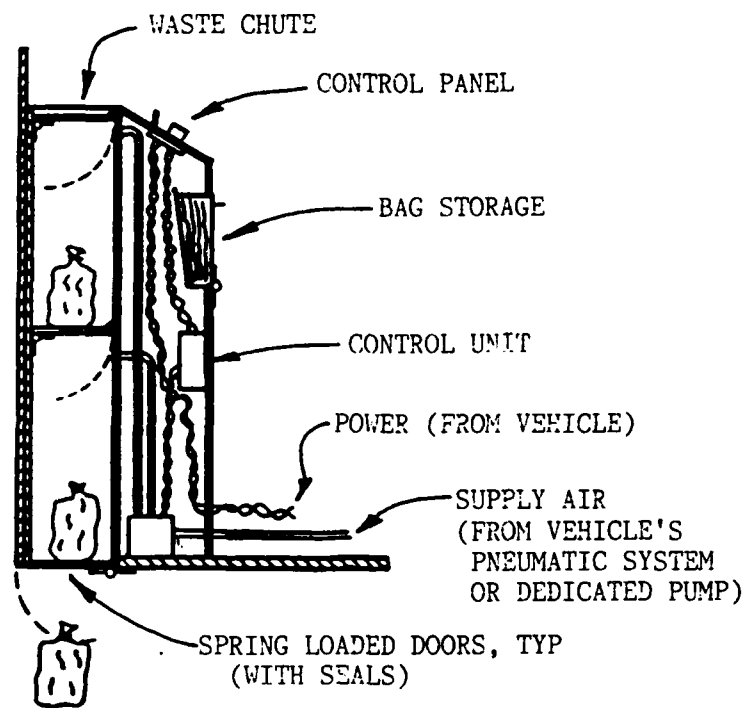

CONCEPT #2 - BAFFLED COLLECTION SYSTEM

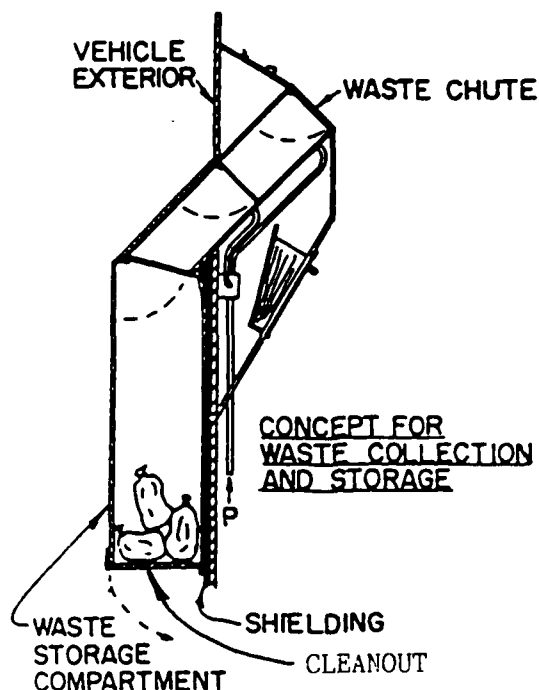

OPERATIONAL SEQUENCE

- 1) WASTE IS PLACED IN PLASTIC BAG AND BAG IS CLOSED WITH WIRE TIE.
- 2) FILLED BAG IS PLACED IN COMPARTMENT A.
- 3) WHEN "OPERATE" BUTTON IS PRESSED, UNIT AUTOMATICALLY CYCLES AS FOLLOWS:
 - a) COMPARTMENT B PURGE
 - b) PRESSURIZE COMPARTMENT A, TRANSFERRING WASTE TO COMPARTMENT B.
 - c) PRESSURIZE COMPARTMENT B, DISPOSING OF WASTE.
 - d) PURGE COMPARTMENT A, WHICH AUTOMATICALLY PURGES COMPARTMENT B.
 - e) UNIT SHUT DOWN.


ADVANTAGES:

- ° STORES WASTE FOR LATER DISPOSAL
- ° LOW POWER REQUIREMENTS
- ° MEDIUM CAPACITY (LIMITED BY STORAGE COMPARTMENT VOLUME)
- ° HANDLES ALL TYPES OF WASTE TO BE ENCOUNTERED
- ° LOW TECHNICAL RISK
- ° LOW COST
- ° LOW MAINTENANCE REQUIREMENTS

DISADVANTAGES:

- ° REQUIRES LARGE WASTE STORAGE COMPARTMENT
- ° OVERFILLING OF STORAGE COMPARTMENT MAY JAM LOWER BAFFLE
- ° REQUIRES PERSONNEL TO LEAVE VEHICLE TO EMPTY SYSTEM
- ° IF BAGS RUPTURE IN STORAGE COMPARTMENT, CLEANOUT WILL BE MOST UNPLEASANT.

CONCEPT #3 - BAFFLED COMPACTION SYSTEM

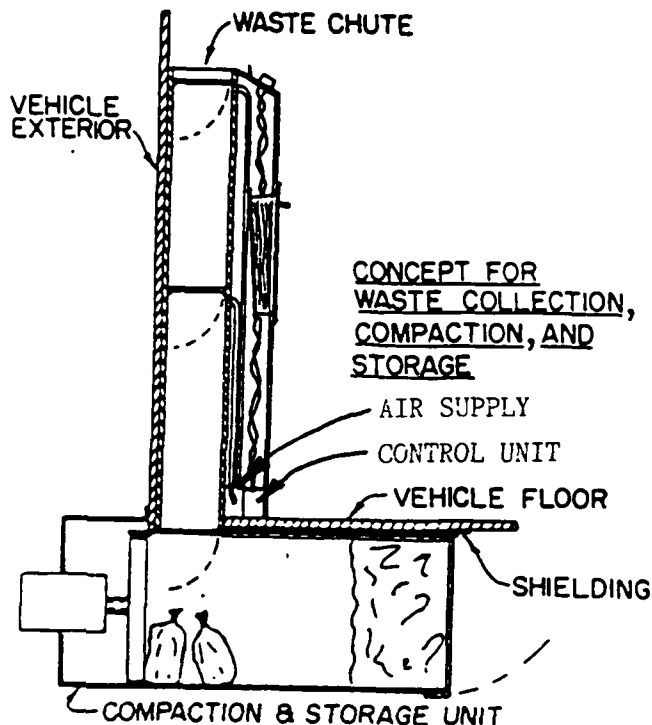

OPERATIONAL SEQUENCE

- 1) WASTE IS PLACED IN PLASTIC BAG AND BAG IS CLOSED WITH WIRE TIE.
- 2) FILLED BAG IS PLACED IN COMPARTMENT A
- 3) WHEN "OPERATE" BUTTON IS PRESSED, UNIT AUTOMATICALLY CYCLES AS FOLLOWS:
 - a) COMPARTMENT B PURGE
 - b) PRESSURIZE COMPARTMENT A, TRANSFERRING WASTE TO COMPARTMENT B.
 - c) PRESSURIZE COMPARTMENT B, DISPOSING OF WASTE.
 - d) PURGE COMPARTMENT A, WHICH AUTOMATICALLY PURGES COMPARTMENT B .
 - e) UNIT SHUT DOWN.


ADVANTAGES:

- ° LOW POWER REQUIREMENTS
- ° HIGH CAPACITY (LIMITED BY COMPACTED WASTE VOLUME)
- ° SIMPLE OPERATION
- ° STORES WASTE FOR LATER DISPOSAL
- ° HANDLES ALL TYPES OF WASTE TO BE ENCOUNTERED
- ° NORMAL OPERATION: MAINTENANCE CREW CLEANOUT
- ° COMBAT OPERATION- EXTENDED MISSIONS - CLEANOUT DOOR JETTISON - NO NEED TO LEAVE VEHICLE TO EMPTY SYSTEM
- ° LOW TO MEDIUM COST
- ° LOW TO MEDIUM TECHNICAL RISK
- ° LOW TO MEDIUM MAINTENANCE REQUIREMENTS

DISADVANTAGES:

- ° OVERFILLING OF COMPACTOR MAY REQUIRE JETTISONING OF COMPACTOR CLEANOUT DOOR DURING LONG MISSIONS
- ° MAINTENANCE OF COMPACTOR WILL BE UNPLEASANT DUE TO RUPTURED BAGS

CONCEPT #4 - ROTARY BAFFLE COMPACTION SYSTEM

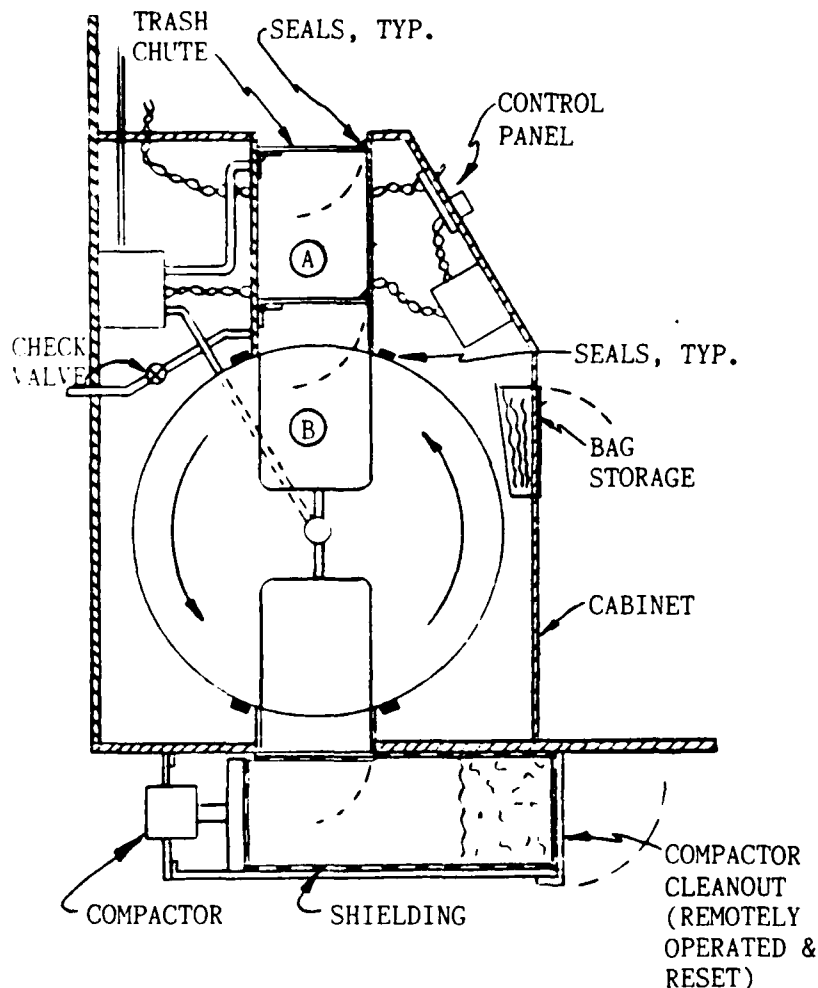

OPERATIONAL SEQUENCE

- 1) WASTE IS PLACED IN BAG & SEALED WITH WIRE TIE.
- 2) BAG IS PLACED IN COMPARTMENT (A).
- 3) WHEN "OPERATE" BUTTON IS PRESSED, UNIT AUTOMATICALLY CYCLES AS FOLLOWS:
 - a) PRESSURIZE COMPARTMENT (A), TRANSFERRING WASTE TO COMPARTMENT (B).
 - b) ROTATE COMPARTMENT B 180° CCW TO THE DUMP POSITION.
 - c) PRESSURIZE COMPARTMENT (B) TO DUMP WASTE INTO COMPACTOR.
 - d) ACTIVATE COMPACTOR & ROTATE COMPARTMENT (B) 180° CCW TO INITIAL POSITION.
 - e) PURGE COMPARTMENT (B) TO OUTSIDE THROUGH CHECK VALVE.
 - f) UNIT SHUT DOWN.


ADVANTAGES:

- °NO DIRECT PATH TO CONTAMINATED STORAGE/COMPACTION AREA

DISADVANTAGES:

- °HIGH TECHNICAL RISK
- °PROBABLE SEAL PROBLEMS
- °LARGE UNIT VOLUME
- °MEDIUM POWER REQUIREMENTS
- °HIGH COST
- °HIGH WEIGHT
- °CHECK VALVE REQUIRED TO PURGE COMPARTMENT (B)
- °HIGH MAINTENANCE REQUIREMENTS (MECHANICAL)

(EXISTING SYSTEM)

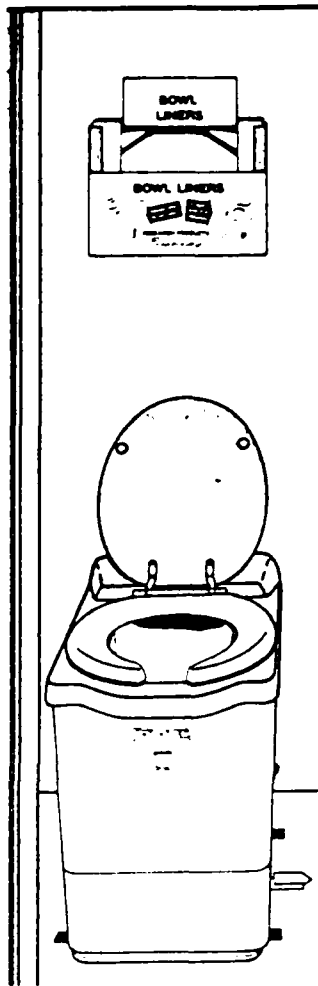

SPECIFICATIONS

```

HEIGHT -----21 in.
WIDTH-----15 in.
DEPTH -----26 in.
VENTING-----140 CFM (min.)
                200 CFM (max)
POWER -----3750 watts @120/208 VAC
                  or 120/240 VAC

```

- °USES WAX PAPER LINER FOR EACH USE
- °REQUIRES MAKEUP AIR FOR BLOWER (30 sq. in. min. for makeup air opening)
- °CYCLE TIME: 60 min.
- °CAPACITY: 6 PERSONS
- °COST: \$1860.00 per unit (with instl kit)

ADVANTAGES:


- °LOW COST
- °SIMPLE OPERATION
- °ADEQUATE CAPACITY (EXCEPT FOR APC)
- °PROVEN DESIGN (LOW TECHNICAL RISK)
- °MEDIUM TO LOW MAINTENANCE

DISADVANTAGES:

- °WILL NOT DISPOSE OF CANS, BOTTLES, OR HIGHLY COMBUSTIBLE MATERIALS, SUCH AS OILY RAGS, ETC.
- °SHOULD NOT BE INSTALLED IN ANY LOCATION WHICH MAY BECOME EXPLOSIVE OR REQUIRING EXPLOSION PROOF COMPONENTS OR WIRING
- °COMPLEX VENTING AND MAKEUP AIR REQUIREMENTS (HIGH INTERNAL CONTAMINATION RISK)
- °HIGH POWER REQUIREMENTS
- °NO MEANS OF DISPOSING OF WASTE ASH IN CLOSED HATCH CONDITIONS.
- °VIBRATION CAUSES RAPID DEGRADATION OF CATALYST PELLETS
- °HIGHLY DETECTABLE SIGNATURE DURING INCINERATION CYCLE (THERMAL)
- °LONG CYCLE TIME

CONCEPT #6 - CHEMICAL TOILET

(EXISTING SYSTEM - MARINE HEAD WITH PUMPOUT)

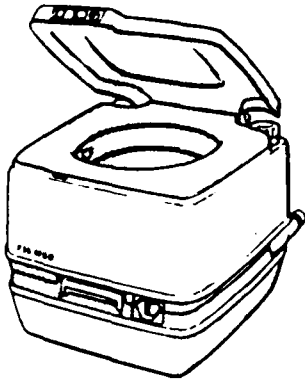

SPECIFICATIONS

- °SELF CONTAINED WATER SUPPLY
- °SELF CONTAINED WASTE HOLDING TANK CAN BE PUMPED OVERBOARD (TO EXTERIOR OF VEHICLE) WHEN FULL
- °CHEMICAL ADDITIVE IN WASTE HOLDING TANK ELIMINATES ODORS
- °NO POWER REQUIREMENTS


ADVANTAGES:

- °NO POWER REQUIRED
- °CAN HOLD WASTE FOR LATER DISPOSAL, OR DUMP OVERBOARD (TO VEHICLE EXTERIOR) WHEN FULL (CHECK VALVE PREVENTS CONTAMINATION FROM EXTERIOR)
- °SIMPLE OPERATION
- °FAMILIAR DESIGN (MINIMUM PERSONNEL TRAINING REQUIRED)
- °LOW TECHNICAL RISK
- °LOW MAINTENANCE REQUIREMENTS
- °CAN BE LOCATED UNDER AN EXISTING SEAT WITH MINOR MODIFICATIONS
- °LOW COST

DISADVANTAGES:

- °FOR HUMAN WASTE ONLY (CANNOT PROCESS BOTTLES, CANS, ETC.)
- °REQUIRES WATER FOR OPERATION
- °REQUIRES CHEMICALS FOR ODOR CONTROL AND MICROBIAL REDUCTION
- °CAPACITY LIMITED BY WASTE HOLDING TANK, CHEMICAL SUPPLY, AND WATER SUPPLY
- °DUMPING OF UNAUTHORIZED MATERIAL (i.e. CANS, BOTTLES, ETC.) MAY INCAPACITATE SYSTEM

CONCEPT #7 - COMBINATION SYSTEM: BAFFLED DUMP WITH CHEMICAL TOILET

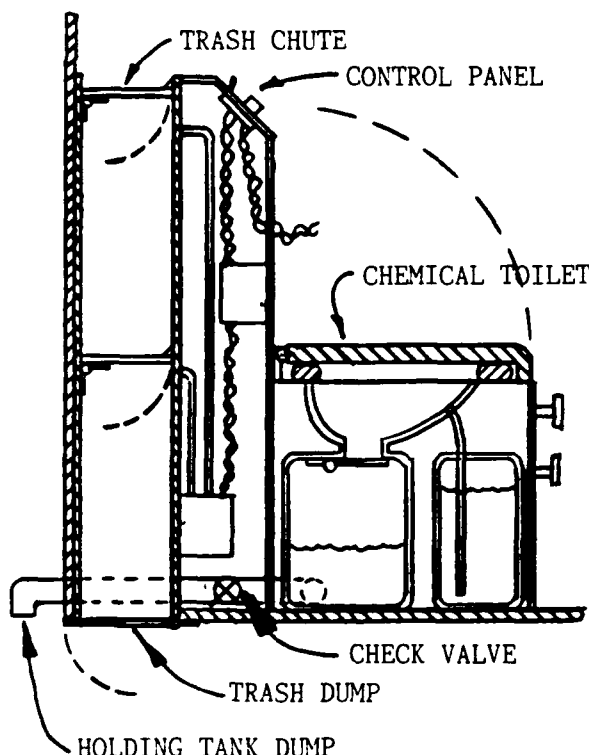

SPECIFICATIONS:

- °SEPARATE DISPOSAL OF HUMAN WASTE
- °SELF CONTAINED WATER SUPPLY
- °SELF CONTAINED WASTE HOLDING TANK CAN BE PUMPED OVERBOARD WHEN FULL
- °CHEMICAL ADDITIVE IN WASTE HOLDING TANK ELIMINATES ODORS
- °UTILIZES PNEUMATICS TO PURGE DUMP CHUTE COMPARTMENTS
- °WASTE OTHER THAN HUMAN WASTE DISPOSED OF THROUGH CHUTE TO EXTERIOR OF VEHICLE
- °SAME OPERATIONAL SEQUENCE AS CONCEPT #1

ADVANTAGES:

- °LOW POWER REQUIREMENTS
- °HIGH CAPACITY
- °SIMPLE OPERATION
- °HANDLES ALL TYPES OF WASTE TO BE ENCOUNTERED
- °DOES NOT REQUIRE PERSONNEL TO LEAVE VEHICLE TO EMPTY SYSTEM
- °LOW TECHNICAL RISK
- °LOW MAINTENANCE REQUIREMENTS
- °LOW TO MEDIUM COST
- °CAN HOLD HUMAN WASTE FOR LATER DISPOSAL, OR DUMP TO EXTERIOR
- °FAILURE OR OVERLOAD OF CHEMICAL TOILET - CAN USE BAFFLED DUMP AS BACKUP


DISADVANTAGES:

- °NON HUMAN WASTE (BOTTLES, CANS, ETC.) IS DEPOSITED DIRECTLY ON GROUND (causing problems during non-combat operation, and possibly permitting tracking of vehicle movements during combat)
- °REQUIRES WATER FOR OPERATION
- °REQUIRES CHEMICALS FOR ODOR CONTROL AND MICROBIAL REDUCTION
- °CAPACITY LIMITED BY WASTE HOLDING TANK, CHEMICAL SUPPLY, AND WATER SUPPLY
- °DUMPING OF UNAUTHORIZED MATERIAL (i.e. CANS, BOTTLES, ETC.) MAY INCAPACITATE CHEMICAL TOILET SYSTEM

CONCEPT #8 - COMBINATION SYSTEM: BAFFLED COMPACTOR WITH CHEMICAL TOILET

SPECIFICATIONS:

- °SEPARATE DISPOSAL OF HUMAN WASTE
- °SELF CONTAINED WATER SUPPLY
- °SELF CONTAINED WASTE HOLDING TANK CAN BE PUMPED OVERBOARD WHEN FULL
- °COMPACTOR CLEANOUT CAN BE JETTISONED WHEN COMPACTOR IS FULL AND MISSION CAN CONTINUE
- °CHEMICAL ADDITIVE IN WASTE HOLDING TANK ELIMINATES ODORS
- °UTILIZES PNEUMATICS TO PURGE DUMP CHUTE COMPARTMENTS
- °WASTE OTHER THAN HUMAN WASTE DISPOSED OF THROUGH CHUTE AND COMPACTED FOR LATER DISPOSAL
- °SAME OPERATIONAL SEQUENCE AS CONCEPT #3

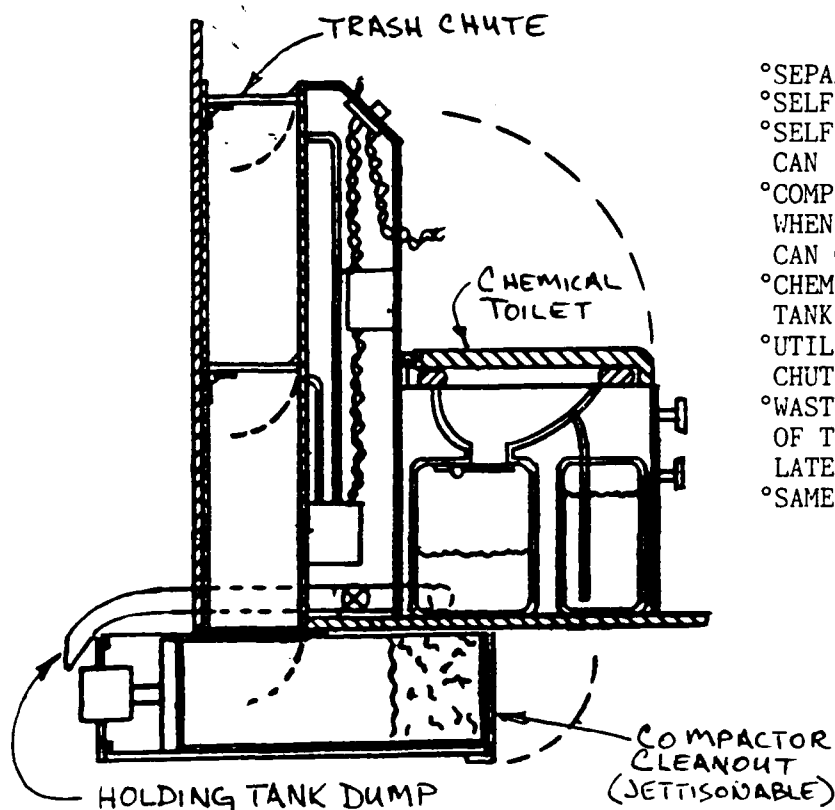


ADVANTAGES:

- °LOW POWER REQUIREMENTS
- °HIGH CAPACITY
- °SIMPLE OPERATION
- °HANDLES ALL TYPES OF WASTE TO BE ENCOUNTERED
- °DOES NOT REQUIRE PERSONNEL TO LEAVE VEHICLE TO EMPTY SYSTEM
- °DOES NOT DUMP WASTE DIRECTLY ON GROUND - STORES FOR LATER DISPOSAL
- °HAS THE CAPABILITY TO DUMP OR PURGE BOTH SYSTEMS IN THE FIELD, PERMITTING EXTENDED MISSIONS WITHOUT RETURN FOR MAINTENANCE
- °LOW TO MEDIUM TECHNICAL RISK
- °LOW TO MEDIUM COST
- °LOW TO MEDIUM MAINTENANCE REQUIREMENTS
- °HUMAN WASTE DISPOSAL SIMPLIFIED - PUMPOUT AT DEPOT

DISADVANTAGES:

- °REQUIRES WATER FOR OPERATION
- °REQUIRES CHEMICALS FOR ODOR CONTROL AND MICROBIAL REDUCTION
- °DUMPING OF UNAUTHORIZED MATERIAL INTO TOILET MAY INCAPACITATE THAT PORTION OF THE SYSTEM
- °SIZE OF SYSTEM MAY BE TOO LARGE FOR SOME APPLICATIONS

CONCEPT #9 - BAFFLED DUMP SYSTEM WITH EXHAUST POWERED WASTE PROCESSOR

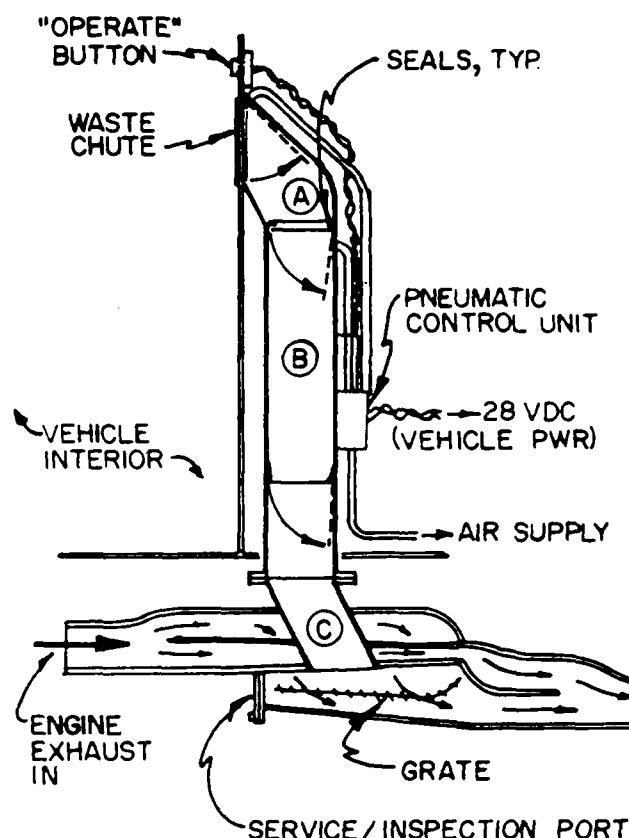

OPERATIONAL SEQUENCE

- 1) WASTE IS PLACED IN PLASTIC OR COATED PAPER BAG AND PLACED IN COMPARTMENT A .
- 2) WHEN "OPERATE" BUTTON IS PRESSED, UNIT AUTOMATICALLY CYCLES AS FOLLOWS:
 - a) COMPARTMENT B PURGE.
 - b) PRESSURIZE COMPARTMENT A , TRANSFERRING WASTE TO COMPARTMENT B .
 - c) PRESSURIZE COMPARTMENT B , TRANSFERRING WASTE TO PROCESSOR C .
 - d) PURGE COMPARTMENT A , WHICH AUTOMATICALLY PURGES COMPARTMENT B .
 - e) EXHAUST HEAT AND GASES BREAK DOWN WASTE TO A DRY POWDER, WHICH IS AUTOMATICALLY EJECTED FROM THE PROCESSOR THROUGH THE EXHAUST PIPE BY THE ACTION OF THE ENGINE EXHAUST.

ADVANTAGES:

- ° LOW POWER REQUIREMENTS
- ° HIGH CAPACITY
- ° SIMPLE OPERATION
- ° HANDLES ALL TYPES OF WASTE TO BE ENCOUNTERED
- ° DOES NOT REQUIRE PERSONNEL TO LEAVE VEHICLE TO EMPTY SYSTEM
- ° LOW TECHNICAL RISK
- ° LOW MAINTENANCE REQUIREMENTS
- ° LOW COST
- ° MINIMAL VEHICLE IMPACT
- ° GOOD RETROFIT POSSIBILITIES
- ° REQUIRES NO WASTE HANDLING/PROCESSING AFTER MISSION
- ° REQUIRES NO WATER OR CHEMICALS FOR OPERATION

DISADVANTAGES

- ° REQUIRES OPERATION OF VEHICLE ENGINE TO PROCESS WASTE
- ° REQUIRES THE DEVELOPMENT OF SPECIAL BAGS AND CLOSURES TO ASSURE PROPER BREAKDOWN DURING THE PROCESSING CYCLE.

APPENDIX B
BENCH MODEL AND
BENCH MODEL TEST RESULTS



BENCH MODEL WPU

A working model of the concept Waste Processing Unit (WPU) was fabricated for the specific purpose of demonstrating the feasibility of the approach selected. The Bench Model WPU differs from an operational unit in several areas. First, the entire side of the unit is removable to permit inspection of the remaining contents (if any) after a test. Second, the unit has provisions for mounting four (4) temperature probes in various areas of the internal flow. Third, no specialized waste delivery system has been supplied, but a flange has been provided for mounting such systems in the future. Finally, the unit has been fabricated from hot rolled steel plate instead of stainless steel to facilitate modifications for testing purposes. Figure C.1.1 shows the overall configuration of the WPU Bench Model and a diagram of it's internal configuration.

PRELIMINARY BENCH MODEL TESTING

The Bench Model WPU was attached to the exhaust pipe of a six cylinder automotive type engine (gasoline) approximately 3 feet from the exhaust manifold, and instrumented as shown on the WPU Initial Bench Test Data Sheet. The engine was run at approximately 2000 rpm , and the response of the WPU was recorded to determine the thermal pattern within the unit. Results of this preliminary testing indicate that the choke section does not provide additional heating within the incineration chamber as expected, but does provide a positive bypass route for exhaust gases in the unlikely event of a blockage in the incineration chamber without significantly reducing the normal operational efficiency of the unit. See the WPU Initial Bench Test Data Sheet for additional findings, recommendations, and comments.



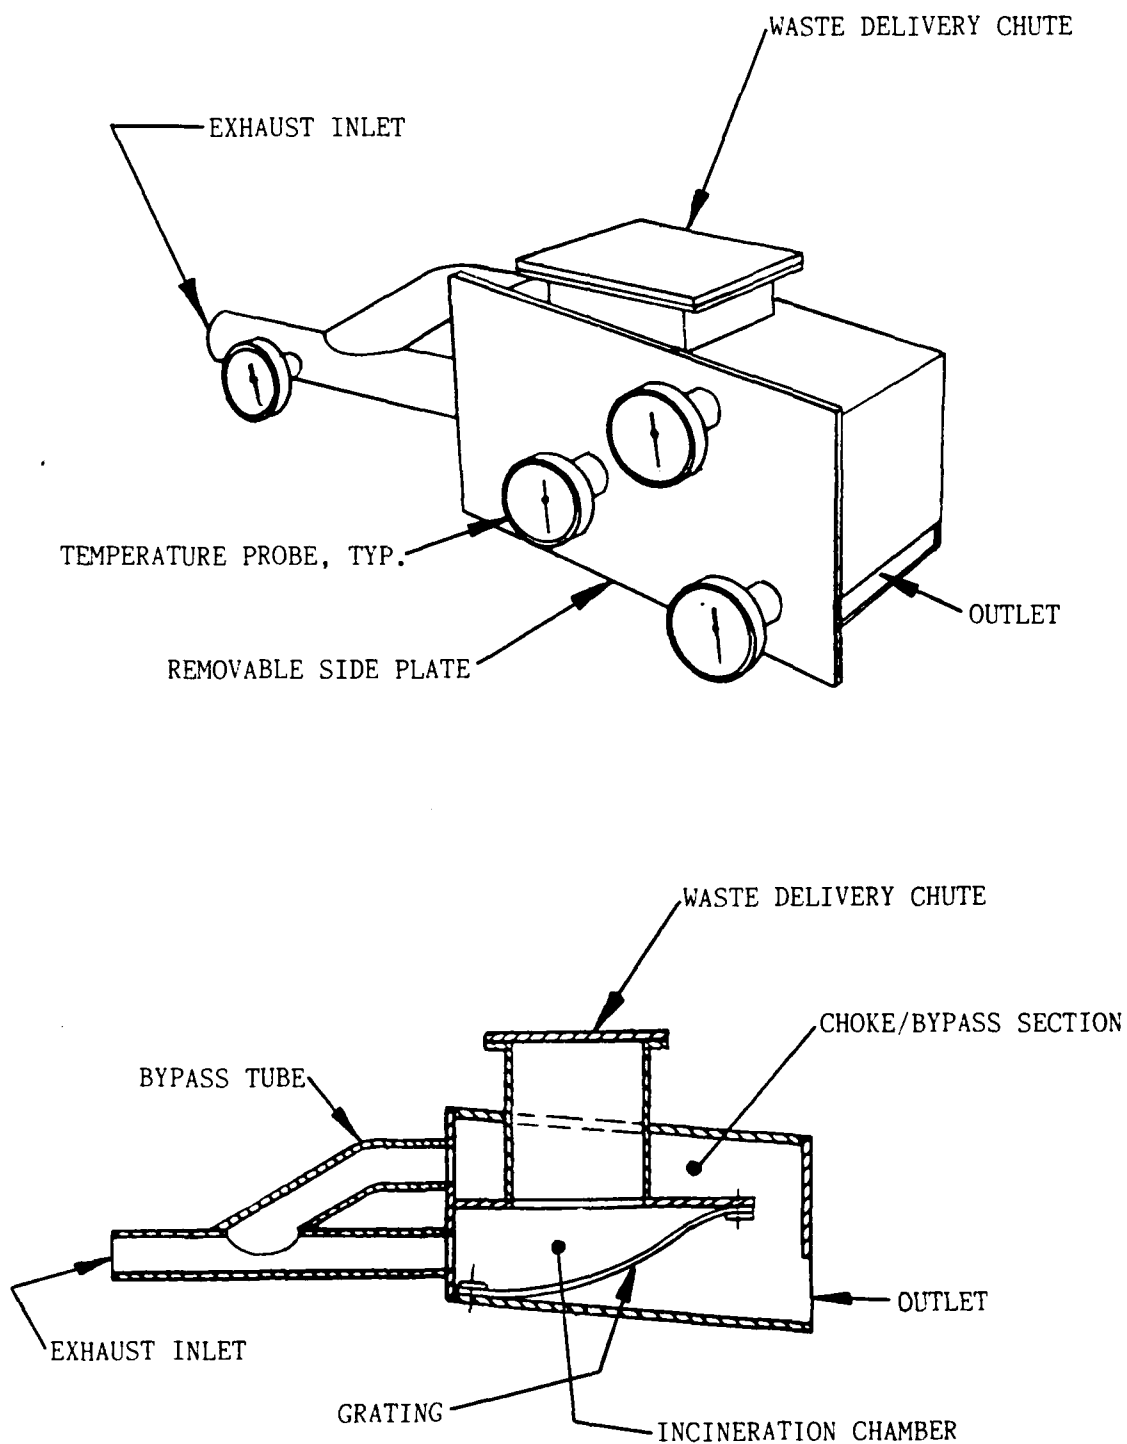


FIGURE C.1.1 - WPU BENCH MODEL

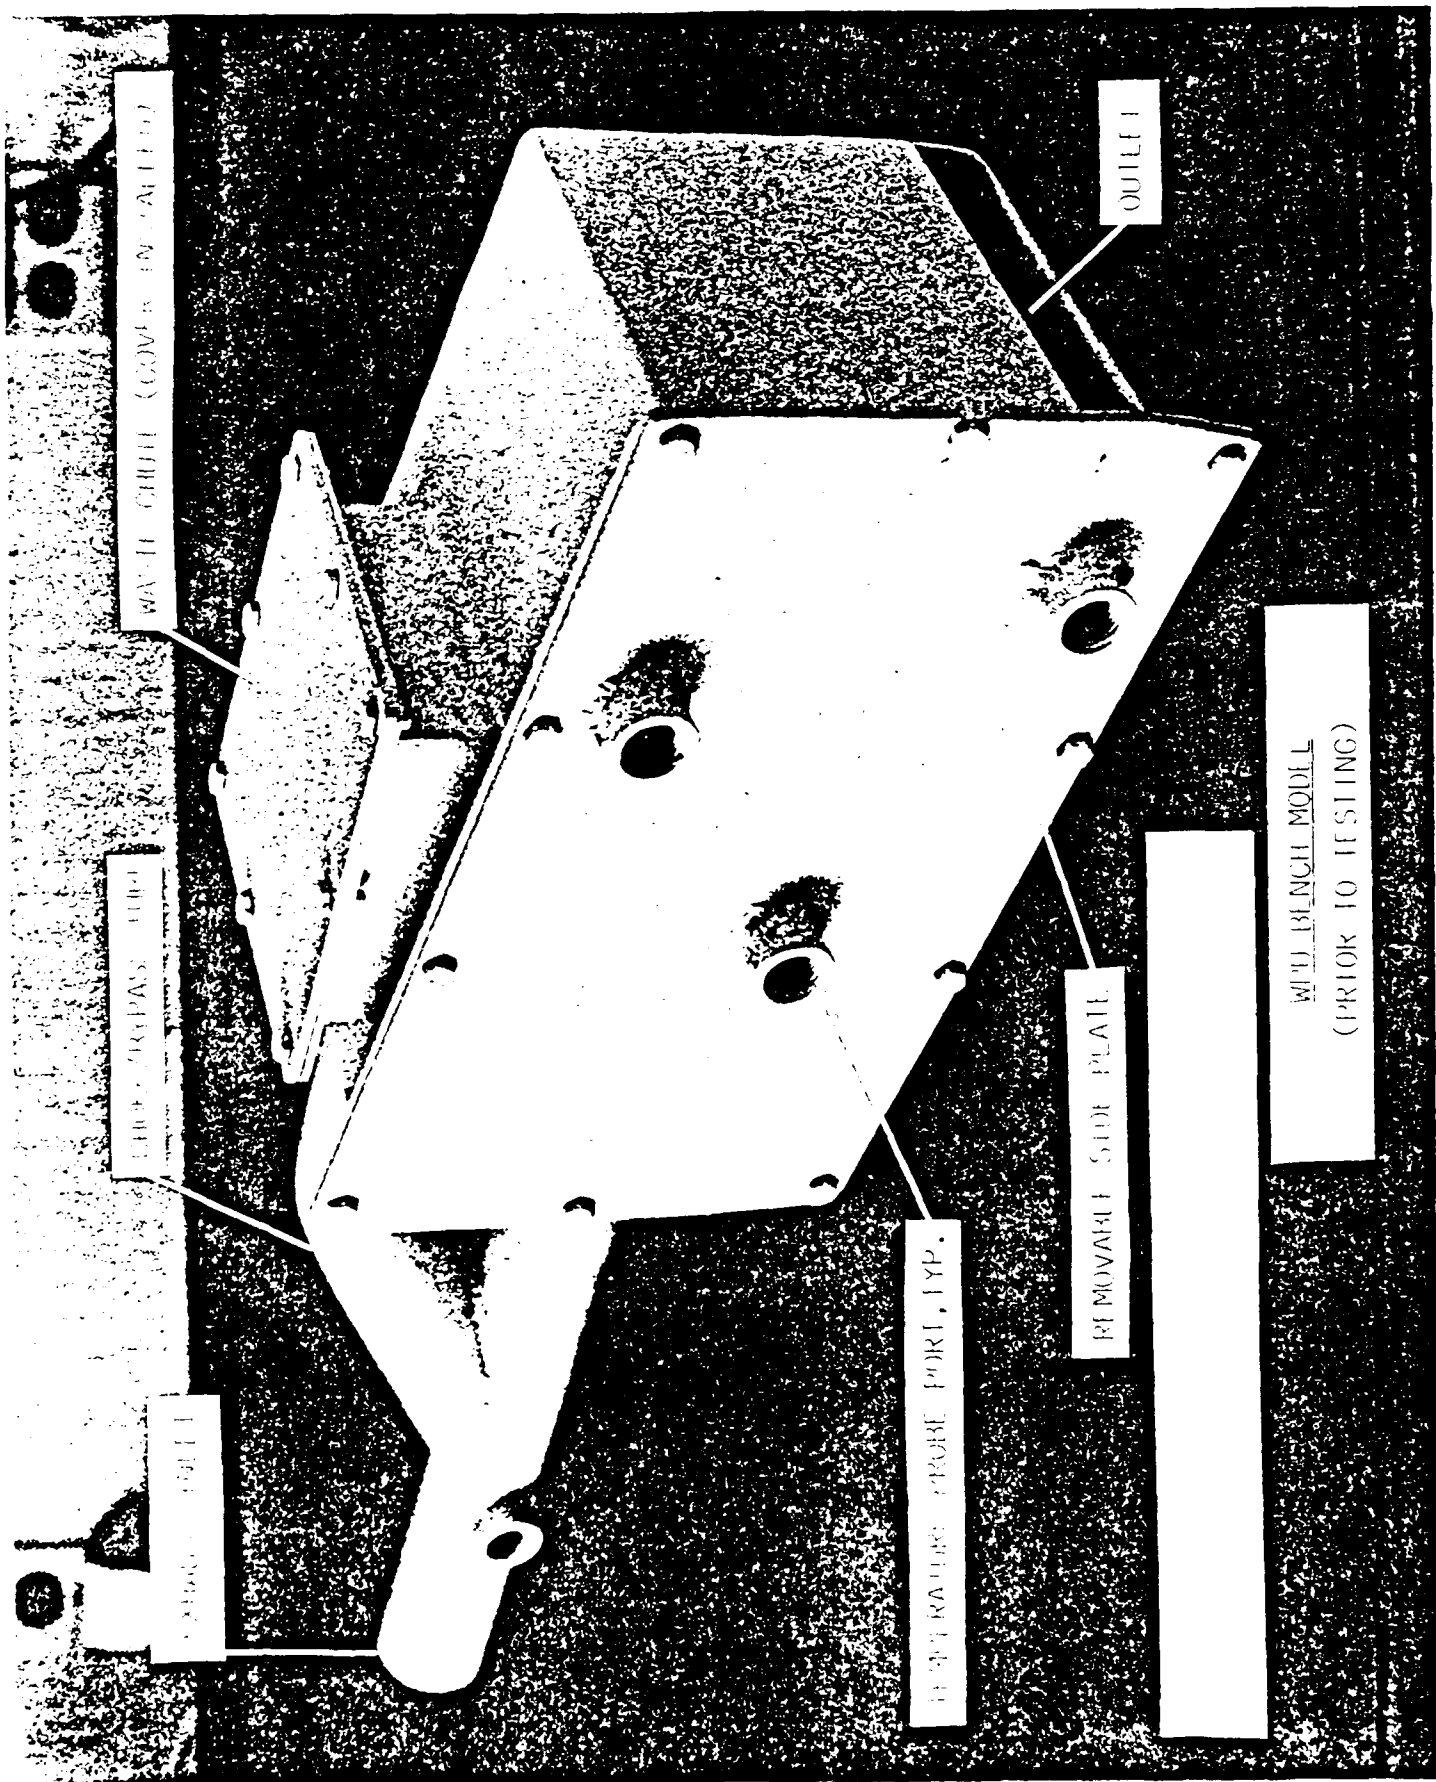



W/ H BENCH MODEL
(PRIOR TO TESTING)

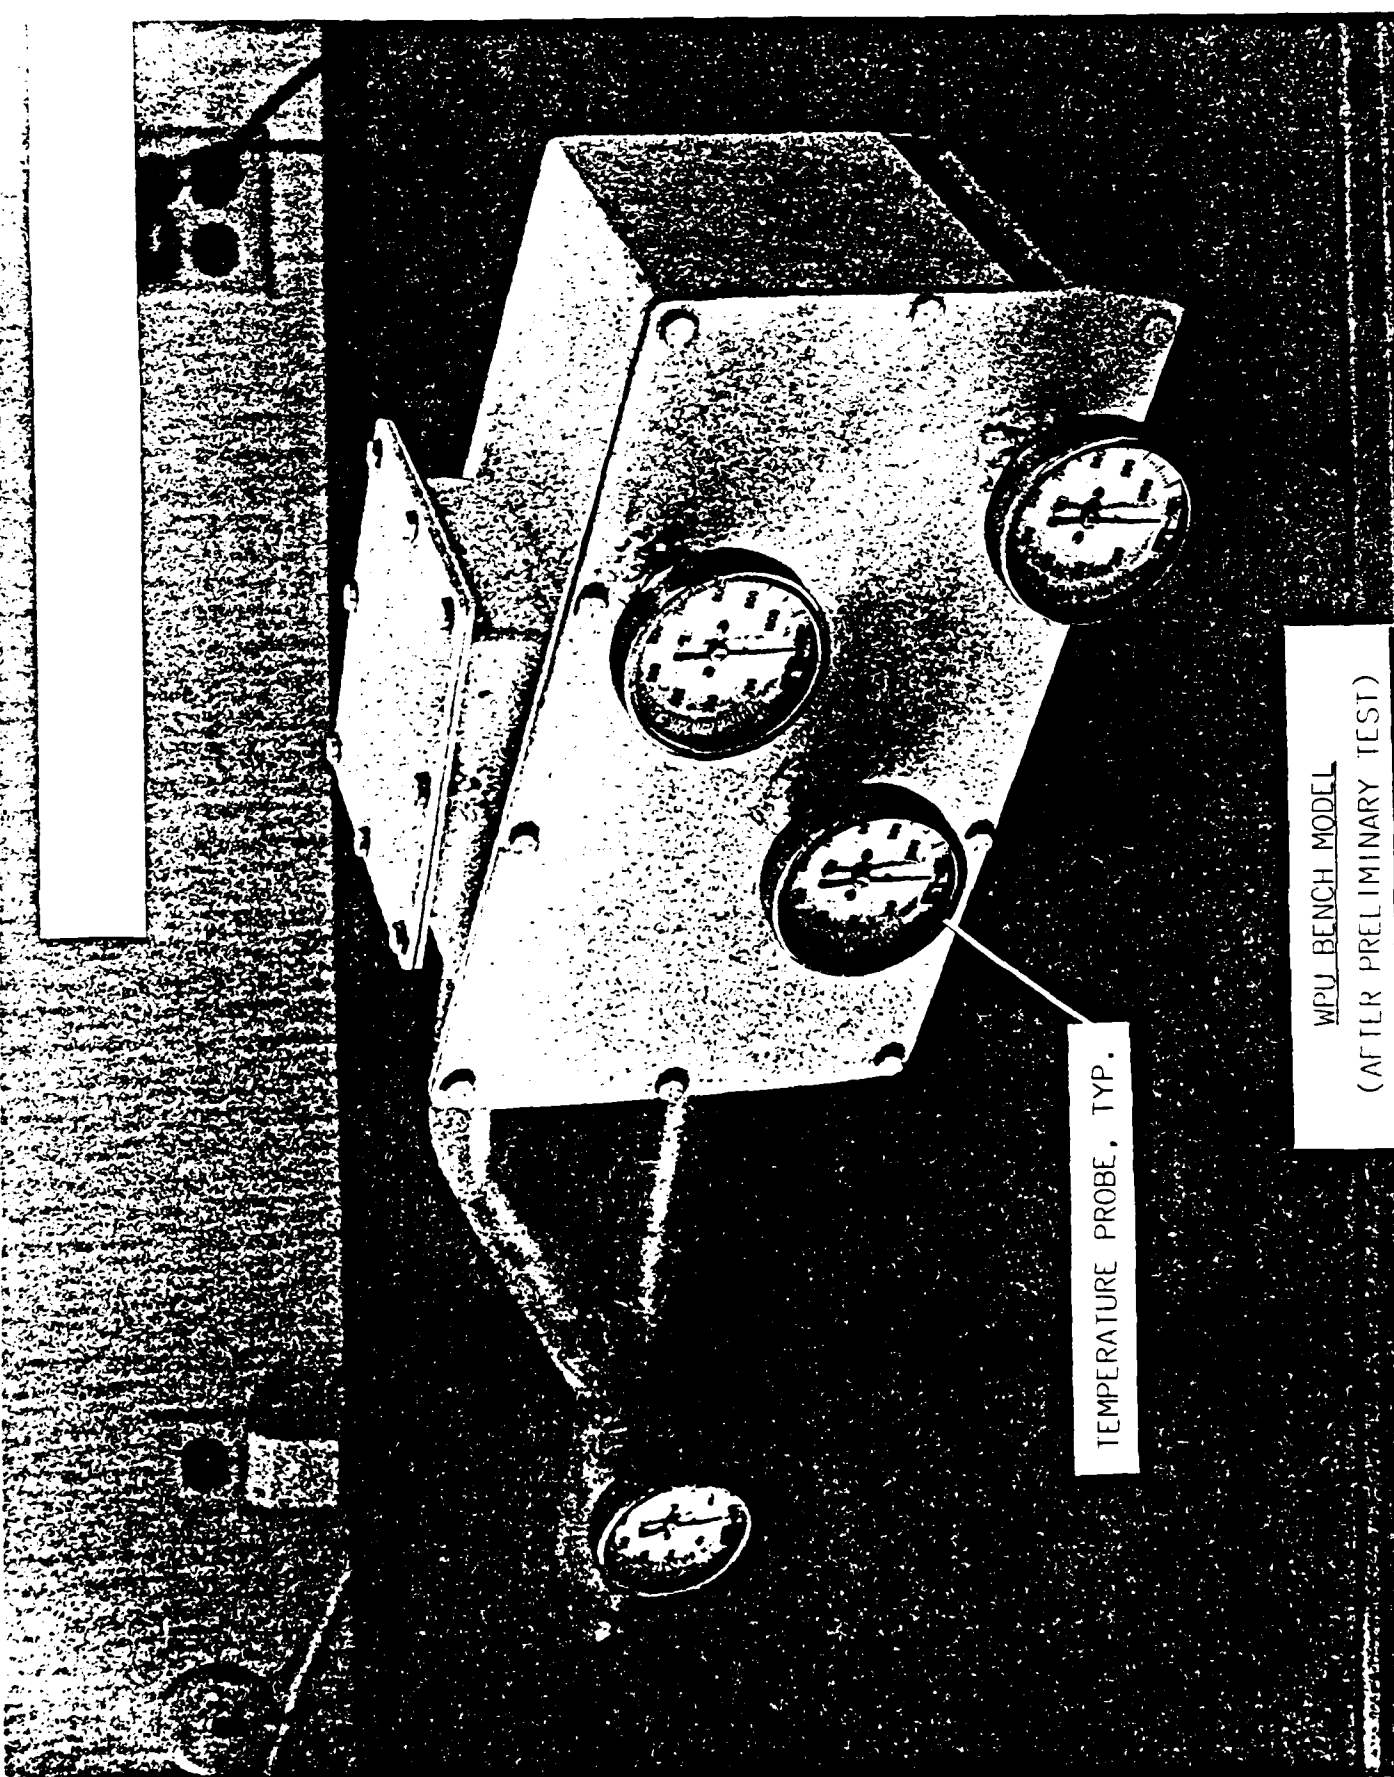

TEMPERATURE PROBE, TYP.

WPU BENCH MODEL
(AFTER PRELIMINARY TEST)

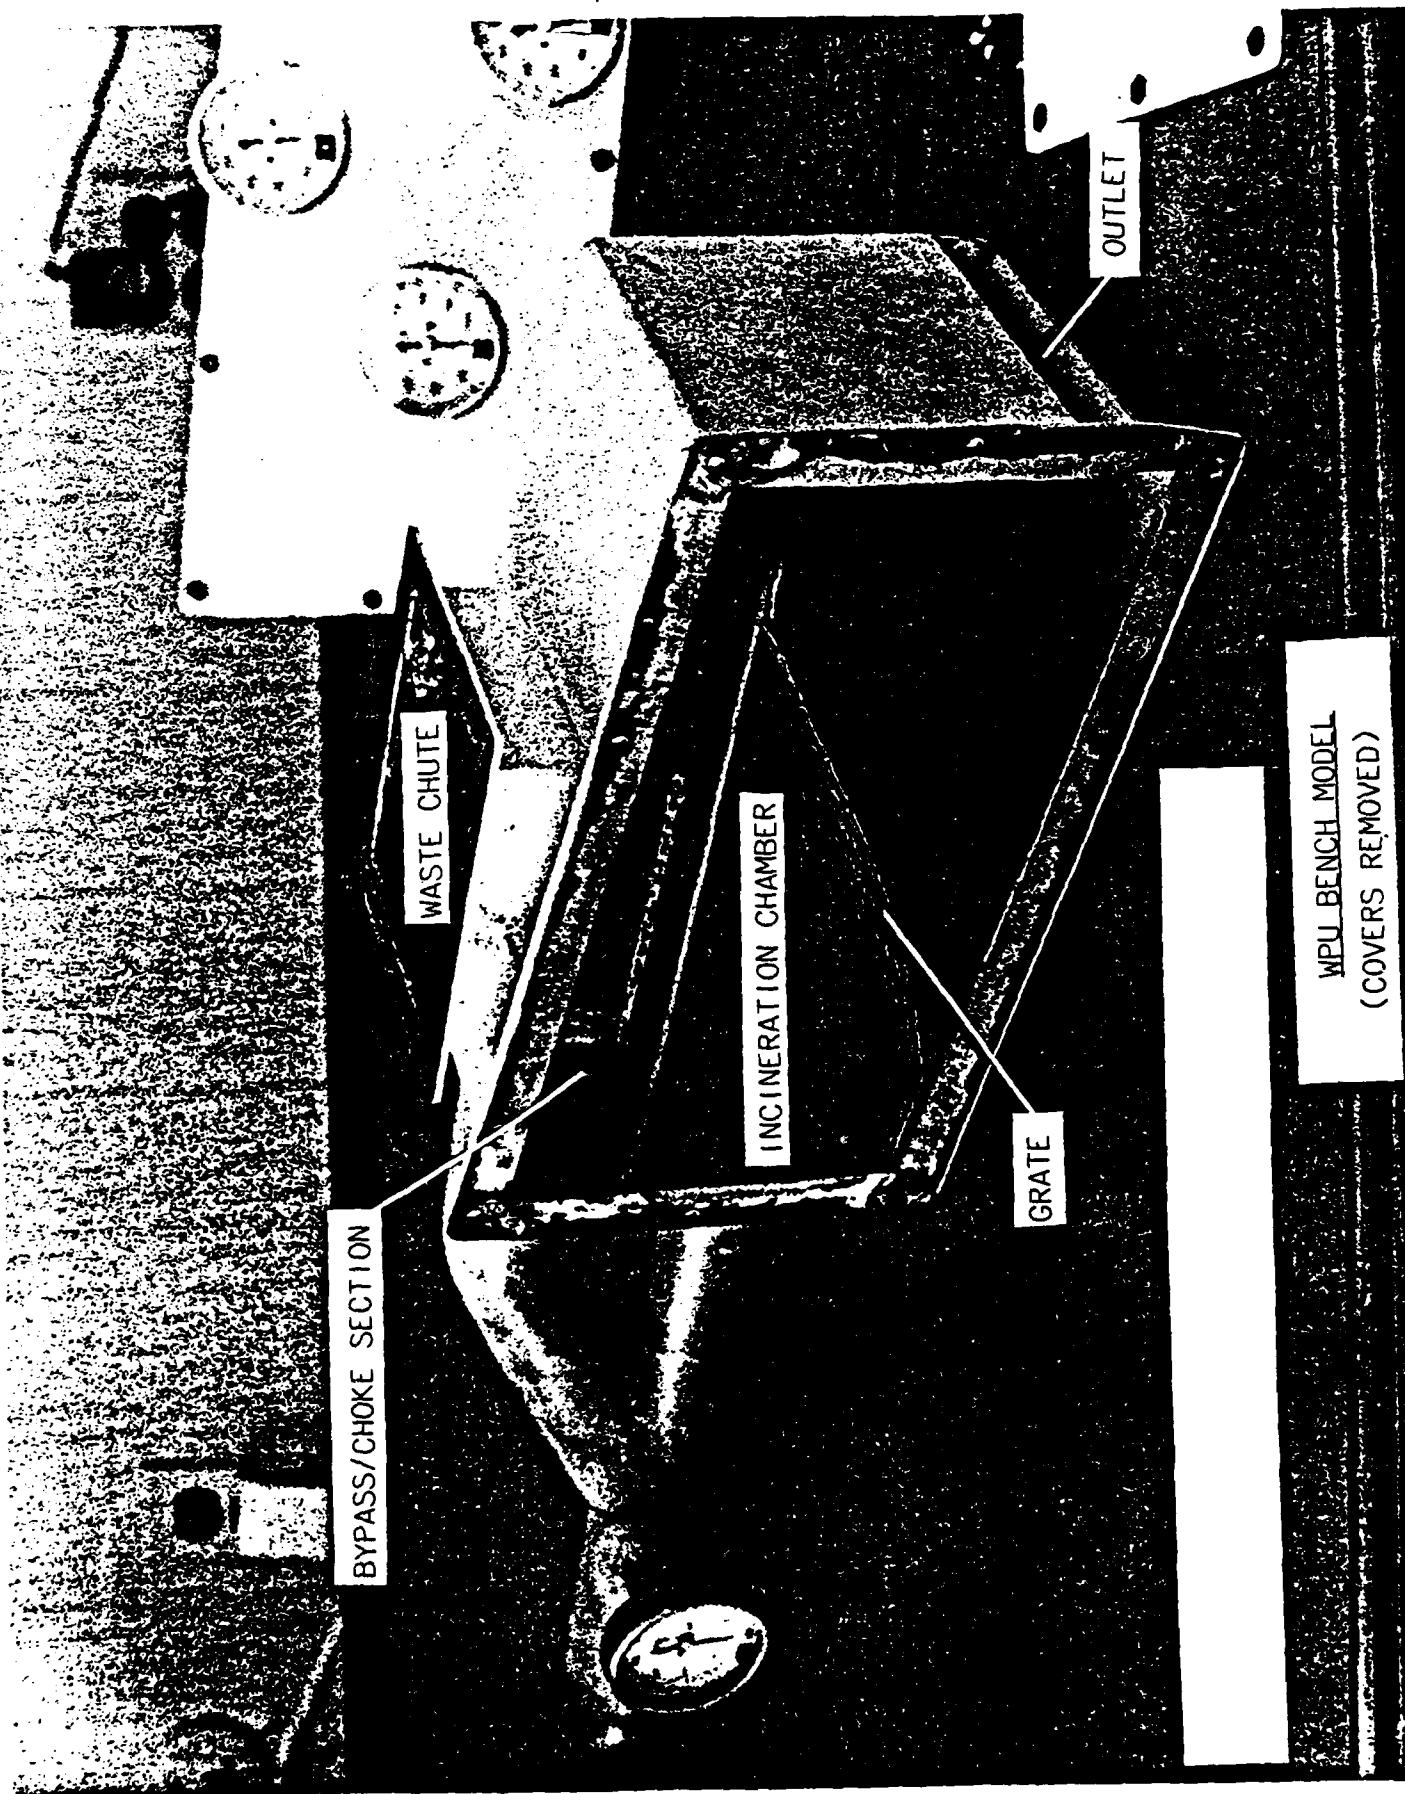


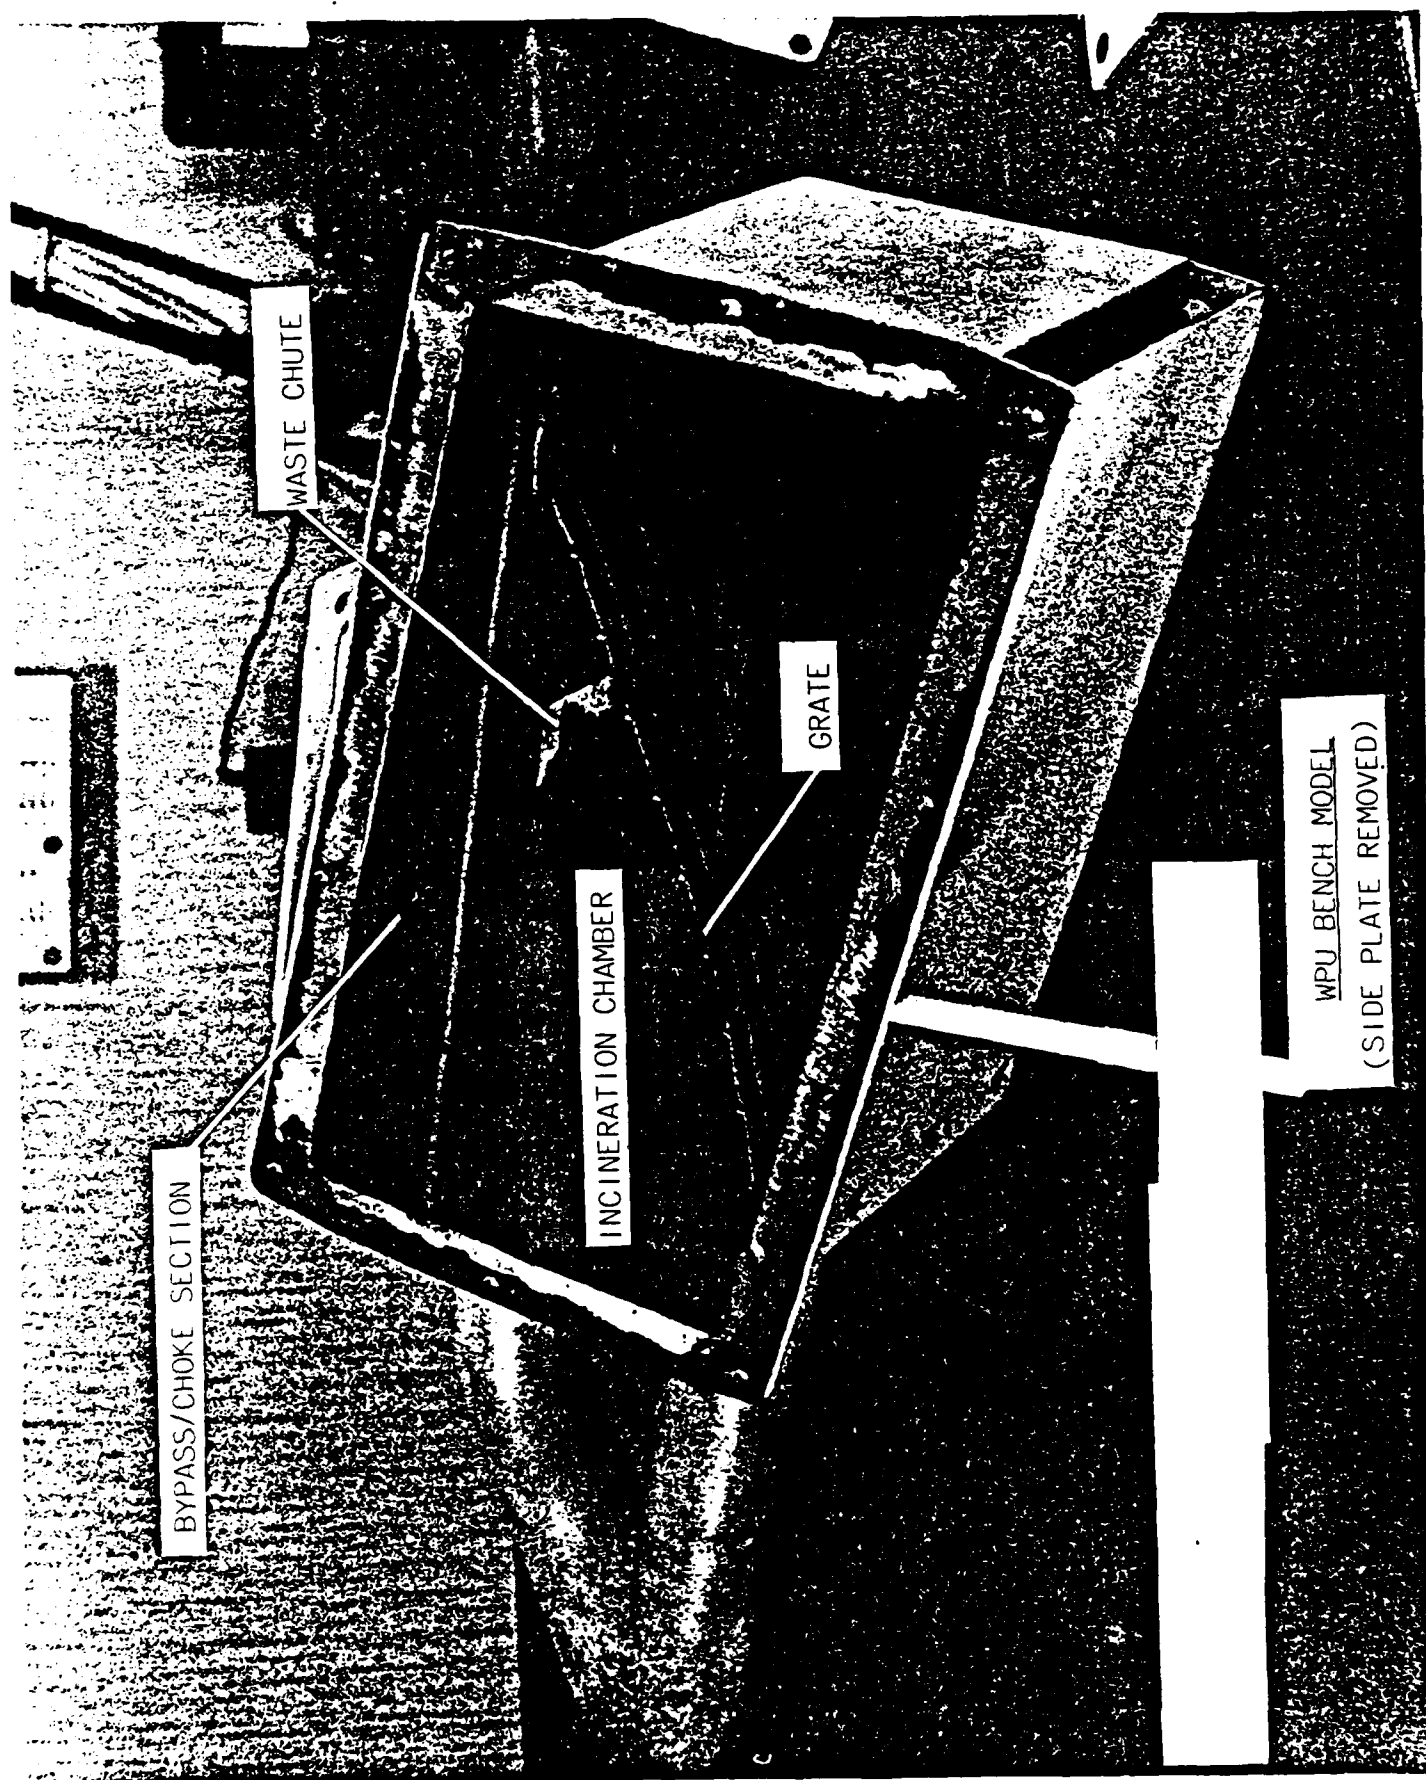

WPU BENCH MODEL
(SIDE PLATE REMOVED)

WPU INITIAL BENCH TEST DATA SHEET

TEST DATE: 86/01/13

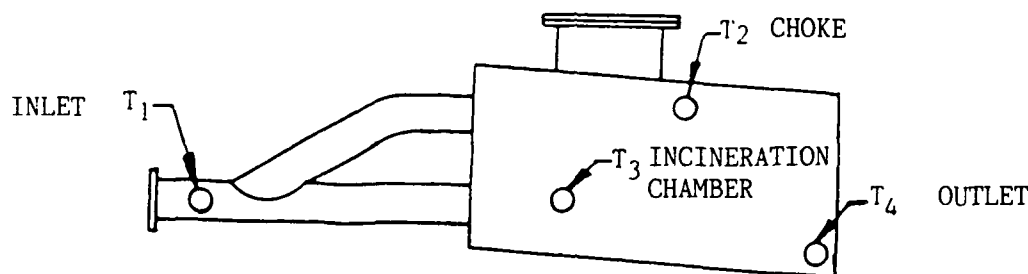

TIME:	17:50	17:54	17:57	18:01	18:06	S H U T D O W N
T ₁	730	780	795	805	815	
T ₂	260	320	360	385	405	
T ₃	450	500	520	540	550	
T ₄	470	520	540	560	575	
TEMPERATURE, °F						

OBSERVATIONS/COMMENTS

1. Bench Model mounted on exhaust of 6 cyl. gasoline engine operating at 2000 RPM for duration of this test
2. Cost in 6 cyl. engine (used) for test bed for Phase II testing.
(This set up is awkward and difficult to use.)
3. Insulation will increase T downstream of inlet.
4. Choke not operating as expected - Temperature lower @ T₂ than elsewhere. Leave flow path in, however, for bypass function.

DISTRIBUTION LIST

	Copies
U.S. Army Tank-Automotive Command ATTN: AMSTA-NR, Mr. Moshin Singapore Warren, Michigan 48397-5000	6
Commander Defense Technical Information Center Bldg. 5, Cameron Station ATTN: DDAC Alexandria, Virginia 22314	12
Manager Defense Logistics Studies Information Exchange Attn: AMXMC-D Fort Lee, Virginia 23801-6044	2
Commander U.S. Army Tank-Automotive Command ATTN: AMSTA-TSL (Technical Library) Warren, Michigan 48397-5000	2
Commander U.S. Army Tank-Automotive Command ATTN: AMSTA-CV (COL Burke) Warren, Michigan 48397-5000	1

END

DTIC

7-86