

NO-A177 258

CHEMICAL KINETICS OF NITRAMINE PROPELLANTS(U) COLORADO
UNIV AT BOULDER DEPT OF MECHANICAL ENGINEERING
N BRANCH NOV 86 AFOSR-TR-87-8120 AFOSR-84-8886


1/1

UNCLASSIFIED

F/G 21/8

NL





MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A177 258

REPORT DOCUMENTATION PAGE

DTIC SELECTED
FEB 25 1987
D

1a. REPORT SECURITY CLASSIFICATION
Unclassified

1b. RESTRICTIVE MARKINGS
None

2a. SECURITY CLASSIFICATION AUTHORITY

2b. DECLASSIFICATION/DOWNGRADING SCHEDULE

3. DISTRIBUTION/AVAILABILITY OF REPORT
Distribution unlimited; approved for public release

4. PERFORMING ORGANIZATION REPORT NUMBER(S)
D

5. MONITORING ORGANIZATION REPORT NUMBER(S)
AFOSR-TR- 87-0120

5a. NAME OF PERFORMING ORGANIZATION
University of Colorado

5b. OFFICE SYMBOL
(If applicable)

7a. NAME OF MONITORING ORGANIZATION
Air Force Office of Scientific Research

5c. ADDRESS (City, State and ZIP Code)
Mechanical Engineering Department
University of Colorado
Boulder, CO 80309-0427

7b. ADDRESS (City, State and ZIP Code)
Bolling Air Force Base
DC 20332-6448

8a. NAME OF FUNDING/SPONSORING ORGANIZATION
Air Force Office of Scientific Research

8b. OFFICE SYMBOL
(If applicable)
AFOSR/NA

9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER
AFOSR-84-0006

8c. ADDRESS (City, State and ZIP Code)
Bolling Air Force Base
DC 20332-6448

10. SOURCE OF FUNDING NOS.

PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT NO.
61102F	2308	A1	

11. TITLE (Include Security Classification)
Chemical Kinetics of Nitramine Propellants

12. PERSONAL AUTHOR(S)
Branch, Melvyn C.

13a. TYPE OF REPORT
Interim Technical

13b. TIME COVERED
FROM 85/10/1 TO 86/9/30

14. DATE OF REPORT (Yr., Mo., Day)
1986 November

15. PAGE COUNT
18

16. SUPPLEMENTARY NOTATION

17. COSATI CODES

FIELD	GROUP	SUB GR.
21	02	
21	09	

18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)
Nitramine Decomposition RDX HMX
Methane / Nitro / oxygen

19. ABSTRACT (Continue on reverse if necessary and identify by block number)
This paper describes experimental measurements of the structure of a lean, premixed, laminar, flat flame of CH₄/O₂. The composition of stable species in the flame was measured by a cooled quartz sampling microprobe and gas chromatographic analysis. The composition of the intermediates CN, CH, NH and NH₂ was measured by laser-induced fluorescence spectroscopy using an excimer laser pumped tunable dye laser system. The flame has two luminous zones, one yellow and the other violet, separated by distinct, dark nonluminous zones. The concentration of NO₂ has a maximum in the yellow zone while the concentrations of CN, NH, NH₂ and NO are maximum in the violet region. The CH concentration profile has two peaks with one occurring in the yellow and one in the violet luminous zone. The first peak is thought to be due to CH₄/O₂ reactions while the second peak is attributed to CH₄/NO₂ reactions. The oxidation of CH₄ is supported by the decomposition of NO₂ to NO, although O₂ is important in the initiation of the reaction process.

DTIC FILE COPY

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT
UNCLASSIFIED/UNLIMITED SAME AS RPT. DTIC USERS

21. ABSTRACT SECURITY CLASSIFICATION
Unclassified

22a. NAME OF RESPONSIBLE INDIVIDUAL
Julian M Tishkoff

22b. TELEPHONE NUMBER
(Include Area Code) (202) 767-4935

22c. OFFICE SYMBOL
AFOSR/NA

RESEARCH OBJECTIVES

The use of nitramine based solid rocket propellants has the advantages of high specific impulse due to low molecular weight products, reduced infrared radiation emissions in the exhaust plume due to relatively lower CO₂ and H₂O in the products, reduced smoke and less corrosive products (Kubota, 1982). There remains considerable uncertainty, however, about the basic chemical and physical processes which control the combustion of these propellants. This is particularly true of the gas phase reactions above the surface of the propellant during combustion.

The decomposition of the nitramines RDX (1,3,5, trinitro hexahydro 1,3,5 triazine) and HMX (1,3,5,7 tetranitro 1,3,5,7 tetracyclooctane) has been considered by several investigators (Schroeder, 1985). When heated the solid RDX or HMX first undergoes solid-solid then solid-liquid phase changes before gaseous products are formed. The major gaseous nitrogen species found are NO₂, N₂O, NO, N₂ and NH₃ and the gaseous carbon species formed are primarily CH₂O, HCN, CO and CO₂. The relative yield of the products has been found to be a function of the pressure and heating rate. Low pressure and high heating rates were found to favor the formation of CH₂O and NO₂. High pressure and low heating rates, on the other hand, were found to favor the formation of HCN and NO₂. Under actual combustion conditions of high pressure and high heating rate, it is likely that CH₂O, HCN and NO₂ are all important. Reactions of these decomposition products support the gas phase flame reactions near the propellant surface and thereby influence the burning rate.

Several distinct luminous flame zones are observed in the combustion of nitramine propellants which have also been seen in hydrocarbon flames with NO₂ as an oxidizer. A very rapid, luminous reaction zone is found adjacent to the surface of the propellant followed by a dark, nonluminous zone at greater distances from the surface. Finally, an additional visible flame zone appears after the dark zone. The detailed chemistry of this flame structure is not known at the present time.

In early studies of fuel/NO and fuel/NO₂ flames, Parker and Wolfhard (1953) qualitatively characterized flames supported by NO and NO₂. They observed multiple luminous zones in flames with a number of different hydrocarbons as fuels and they also were able to establish a pure NO decomposition flame. More quantitative data have been reported on methyl nitrite, methyl nitrate and ethyl nitrate decomposition flames (Hall and Wolfhard, 1957) which also show multiple luminous zones. Arden et al. (1957) and Hicks (1962) measured stable species composition profiles in a variety of these flames and provide some insight into the structure of the multiple luminous zones. The fuel evaporates from the liquid pool and rapidly decomposes into a variety of products which then react in the gas phase. In the case of the nitrites, the decomposition products are hydrocarbons and NO. In the case of the nitrates the products are hydrocarbons and NO₂. When NO₂ is formed as a decomposition product, rapid reaction between the hydrocarbon intermediates and NO₂ is observed leading to the formation of NO. In all of the flames where NO is formed, there

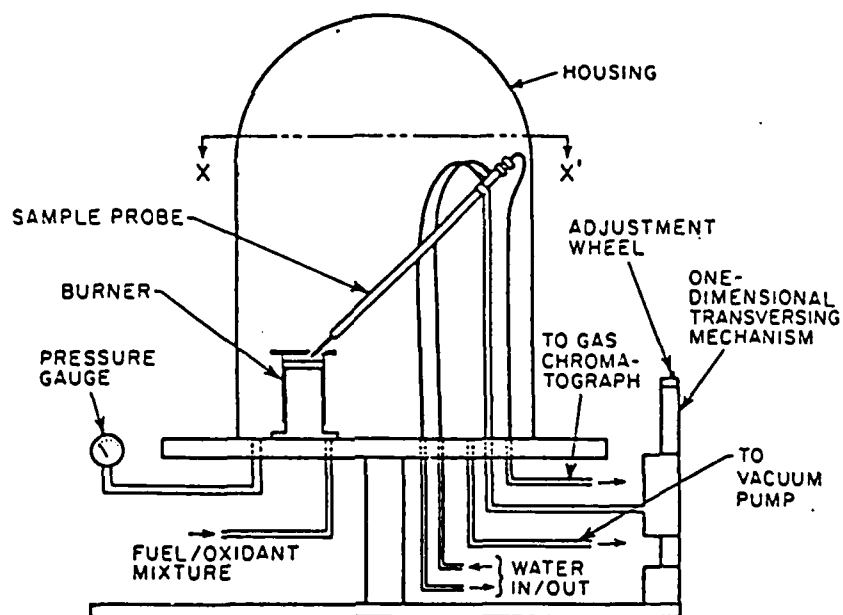
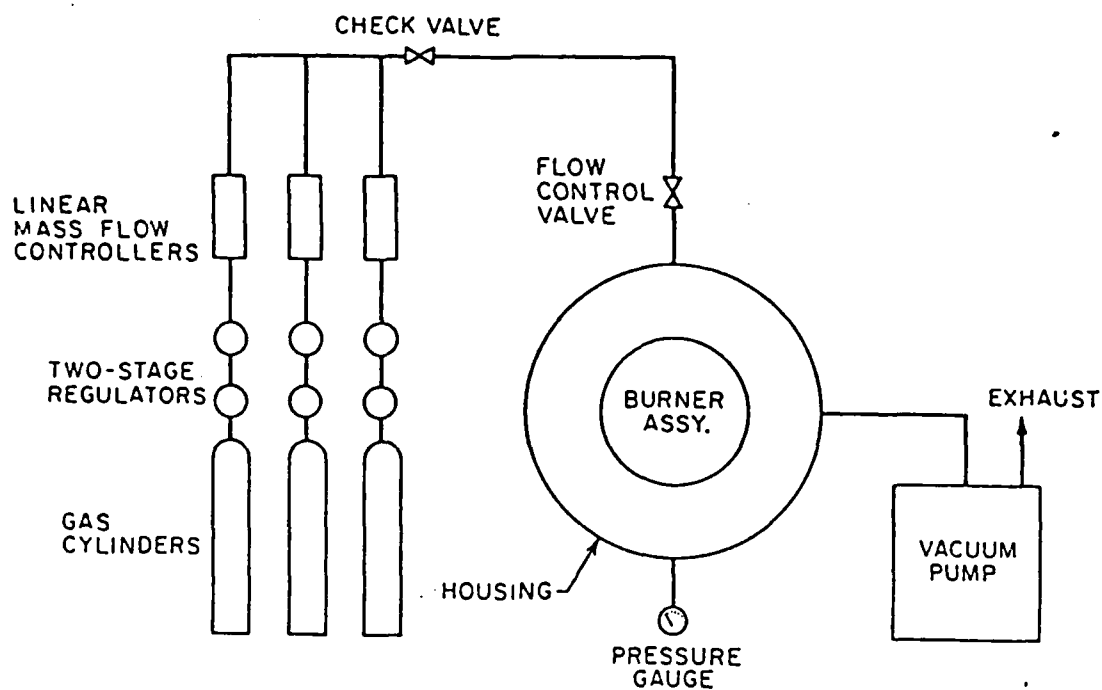


Figure 1. Schematic of the low pressure, laminar, flat flame burner assembly showing the gas supply system (above) and gas sampling system (below). Samples of stable gases are withdrawn to the gas chromatograph by a vacuum pump.

Several spectroscopic techniques have been used to probe concentrations and temperature of particular species in flames (Bonczyk, et al., 1979 and Crosley, 1979). Since lasers can be focused down to very small diameters, spatial accuracy can be obtained which is sufficient to resolve even the very steep concentration gradients characteristic of flame reaction zones. Interaction of laser radiation with specific energy modes of the reactant species also provides considerable selectivity in identification and measurement of species concentration and temperature. The technique of laser induced fluorescence (LIF) is particularly suited to the measurement of minor species and reaction intermediates. Although less sensitive than LIF, laser absorption can be used to measure species which may not be accessible by LIF. Both laser induced fluorescence and laser absorption measurements have been reported for OH, NH₂, NH, CN, CH, and NO.

The optical arrangement for the laser absorption and laser induced fluorescence measurements is given in Figure 2. A Lambda Physik EMG 53 MSG Excimer Gas Laser is used to pump a Lambda Physik FL2001 Dye Laser. The excimer laser pulses at 0.1 to 100 Hz and has a pulse energy of 50 mJ at 308 nm. The Lambda Physik FL2001 Dye Laser has a wavelength range of 320 to 970 nm and a bandwidth of 0.22 cm⁻¹ at 580 nm. Typical pulse energies are 10 to 15 mJ and pulsewidth is 5 to 20 nsec with background of less than 1%. The combination of the excimer laser and the dye laser with the dyes available, provide high pulse energy, narrow bandwidth and extremely low background.

Following the optical path in Figure 2, the laser light output from the dye laser is filtered and a beam splitter used to divert part of the beam to a power meter monitor. Light then passes through the burner pressure vessel and is focused through the flame. Separate focusing arrangements and mirrors are used for the laser absorption and laser fluorescence measurements to avoid window fluorescence. The collected light from fluorescence or the attenuated light from absorption is then focused onto the entrance slit of the SPEX 1401, 0.75m double monochrometer. The signal from the photomultiplier tube is processed by a Stanford Research Systems signal averager and recorded. The Hewlett-Packard 9816S computer is available for controlling the spectrometer scan and other experimental variables and analysis of data from the experiments.

The flame which is being studied is a premixed, laminar, flat flame. The flame is therefore nonsmoking to minimize soot extinction and limit background luminosity and laser induced particulate fluorescence. Since the path length through the flame is 8 cm, defocusing is minimal. Laminar flow and the use of electronic mass flow controllers accurate to 1% also eliminate temporal variations in the flowfield. Beam trapping helps avoid spurious scattering of laser light.

The species of interest in the flame studies we are conducting generally have known absorption and emission spectra and are all accessible by the turnable dye laser system. They also have previously determined lifetimes for radiative decay. Data from the previous observations of these species in other chemical systems aid in the interpretation of the fluorescence and absorption spectra. In addition, the measurement of stable species concentration and of temperature in the flames by gas sampling and gas analysis also aids

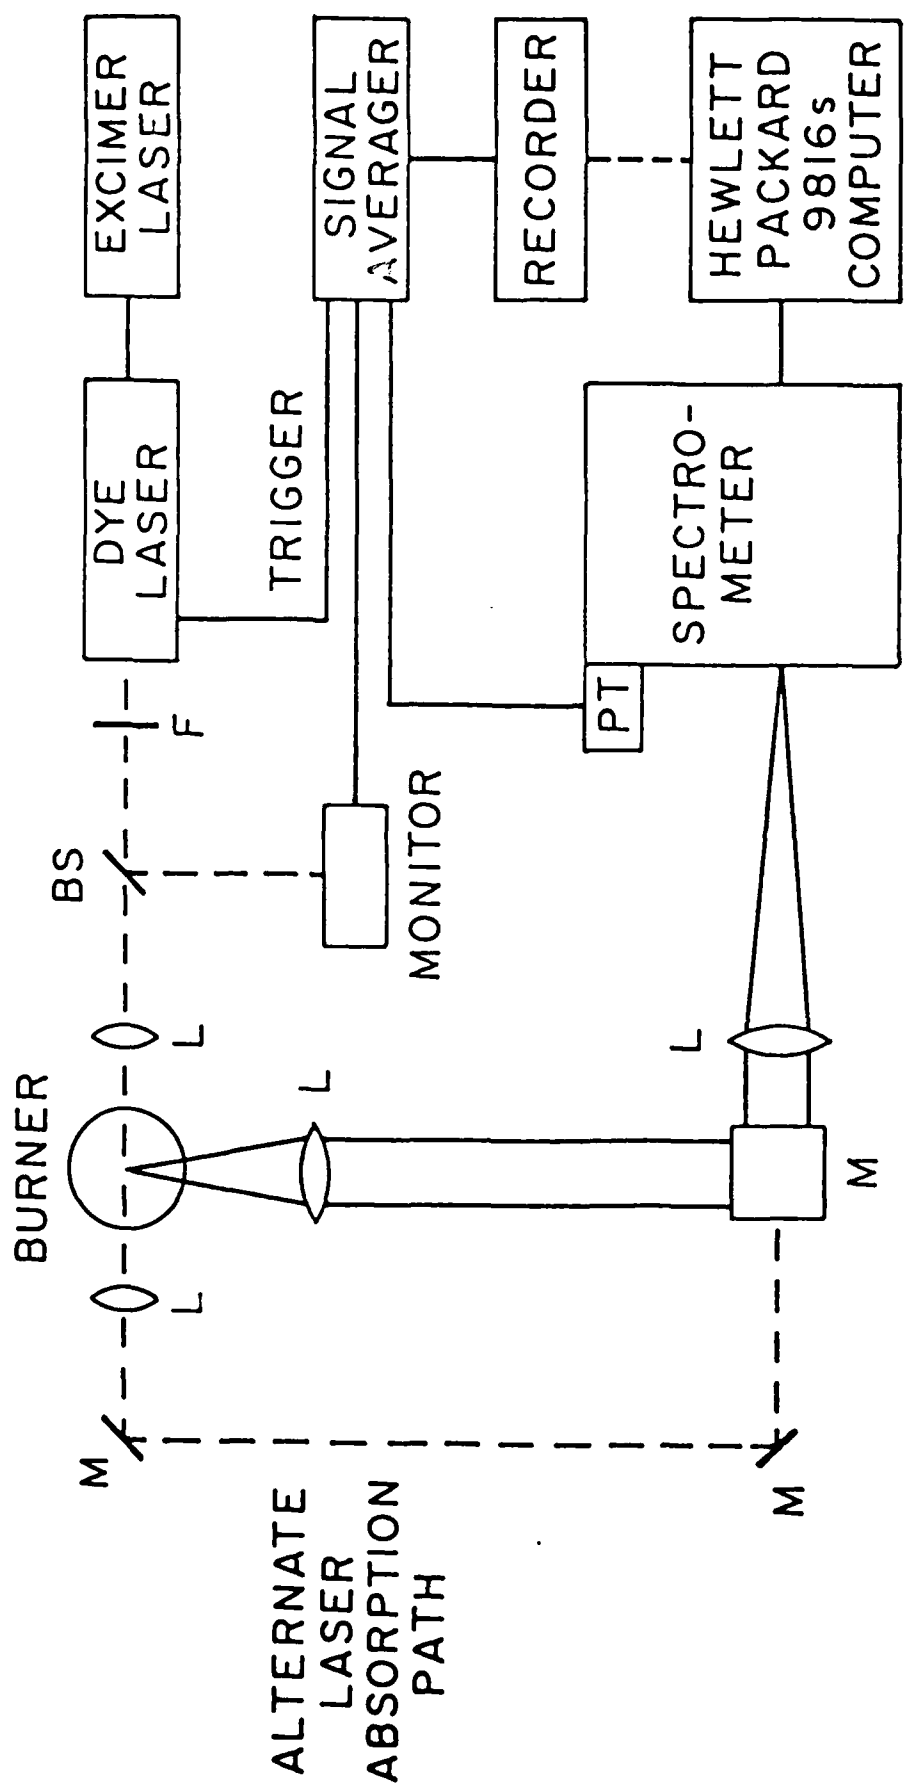


Figure 2. Schematic of the optical arrangement for the laser induced fluorescence system.

in interpretation of the fluorescence data. These and other requirements of signal interpretation are discussed in detail in Eckbreth (1981), Bonczyk et al. (1979) and Crosley (1979). Although all necessary corrections are not completely characterized, saturated fluorescence and fluorescence calibrated by absorption of some other technique have been successful in giving reliable species concentration data for laboratory flames. A typical laser induced fluorescence spectrum of CH is given in Figure 3.

Flame Modeling


The data generated by the experimental measurements consist of one-dimensional profiles of species composition and temperature throughout the flame. The data can then be compared to a numerical model of the multicomponent reacting flow including an elementary reaction mechanism for the detailed chemistry of major species and intermediates. The comparison between the experimental profiles and those generated by the numerical model provide insight into the appropriateness of the reaction mechanism and fluid mechanics of the process.


RESULTS AND DISCUSSION

Profiles of stable and unstable species and temperature have been measured in a lean, laminar premixed flat flame stabilized on a Cercor ceramic burner. The burner has a width of 2.0 cm and a length of 8.0 cm and is enclosed in a vacuum chamber with the pressure maintained at 30 torr. During sampling for stable species the quartz sampling microprobe and vacuum chamber are held in a fixed position and the burner is moved by means of a micrometer positioner accurate to .01 mm. The sampling probe is surrounded by a cooling water jacket which begins 2.54 cm above the tip of the probe. During the laser fluorescence measurements the optics are similarly held in a fixed position and the burner moved to provide a traverse of the flame gases.

The flames of CH₄/NO₂/O₂ were characterized by two distinct luminous zones separated by dark zones. At the face of the burner where the gas temperature was generally low, there was a dark or nonluminous zone usually a few mm in thickness. Next there was a yellow/orange region which was typically 3 or 4 mm thick followed by the second dark zone. Finally there was a violet luminous zone about 5 mm in thickness. The thickness of the zones could be changed by changing the relative proportion of the reactants. For example, if NO₂ is increased and O₂ decreased the yellow region becomes wider and brighter while the violet region becomes thinner and less bright.

It was found in these low pressure flames that oxygen was necessary in order to stabilize the flames with NO₂. Table I gives the minimum oxygen flow in order to stabilize the flame as a function of NO₂ flowrate in our burner. If the O₂ is decreased below these limits the flame first begins to oscillate rapidly and then is extinguished. Earlier qualitative observations of hydrocarbon/NO₂ flames (Parker and Wolfhard, 1953) were at significantly higher pressure where it was possible to stabilize pure hydrocarbon/NO₂ flames. The measured stable species concentrations suggest that the overall reaction has a stoichiometry given by



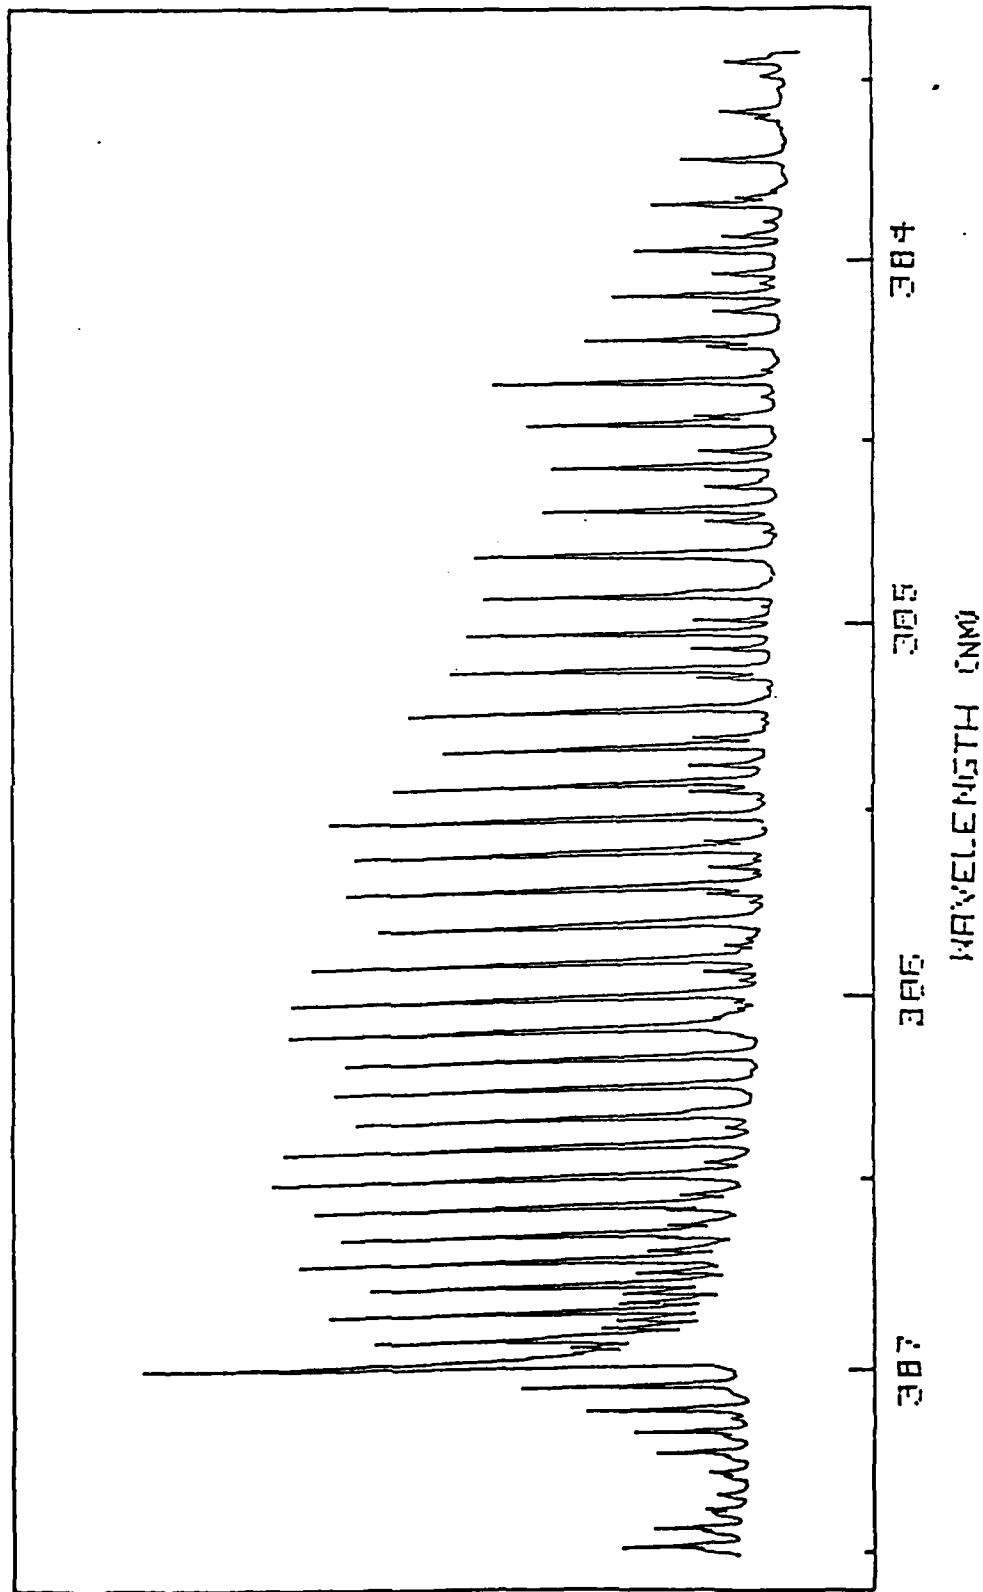

I N T E N S I T Y a . u .

FIG 3. EMISSION SPECTRA OF CN ($B^2 - X^2$) IN CH₄-NO₂-O₂ FLAME

TABLE I. Limiting Oxygen Flowrate for Stable $\text{CH}_4/\text{NO}_2/\text{O}_2$ Flames at 30 torr.

Flame	Flowrate (SL/M) *			
	CH_4	NO_2	O_2	Ar
1	0.4	0.4	0.43	0.24
2	0.4	0.8	0.33	0.0
3	0.4	1.2	0.28	0.0
4	0.4	1.6	0.22	0.0

* Flowrates are in standard liters per minute.


The added oxygen appears to be necessary to initiate the early reaction of CH₄ even though the mixture is quite fuel lean.

The measured species concentrations and temperature are given in Figures 4-6. The spectral transitions used for the laser induced fluorescence measurements are given in Table II. The spectral lines used were selected so that the correction for the effect of temperature on the line intensity was a minimum. Also shown on each of the figures is the location of the dark and luminous zones in the flame.


The concentration profiles show that NO₂ is converted largely to NO and that exothermic NO reduction occurs in the later stages of the flame. Oxygen needed for the oxidation of CH₄ is provided primarily by the early decomposition of NO₂ to NO. The carbon products CO and CO₂ are formed early in the reaction zone and CO continues to be oxidized to CO₂ throughout most of the flame. The concentration of the intermediates CN, CH, NH and NH₂ are plotted relative to the maximum concentration of each species in Figure 6. The concentrations of CN, CH and NH₂ were calibrated by a separate laser absorption system using a multi-pass optical cell arrangement. This makes possible the evaluation of absolute concentrations of these species. Since this calibration was not possible due to the lack of adequate spectroscopic data for NH, concentration relative to the maximum observed is plotted for that species.

Several species have concentration maxima in each of the luminous zones. In the yellow region NO₂ is at a maximum while in the violet region CN, NH, NH₂ and NO are all at their maximum concentrations. Nitrogen dioxide chemiluminescence in the yellow/orange is strong and CN, NH and NO have strong emission bands in the violet. The dark zones appear to result from the distinct separation of the concentration profiles of these species and from the cooled burner face. The concentration profile for CH shows a very unusual double peak with one peak occurring near the yellow luminous zone and the other in the violet zone. The first peak is thought to be due to CH₄/O₂ reactions while the second is due to CH₄/NO₂ reactions.



The interpretation of the mechanism for formation of CH and CN is possible with the aid of recent studies of carbon-nitrogen interactions in flames (Thorne, et al., 1986 and Le and Vanpee, 1985). The reaction is initiated by hydrogen abstractions from CH₄ leading to the formation of CH₂. An additional reaction such as



is usually the most important step in the formation of CH. Once CH is formed, several paths are reasonable to form CN, for example



or



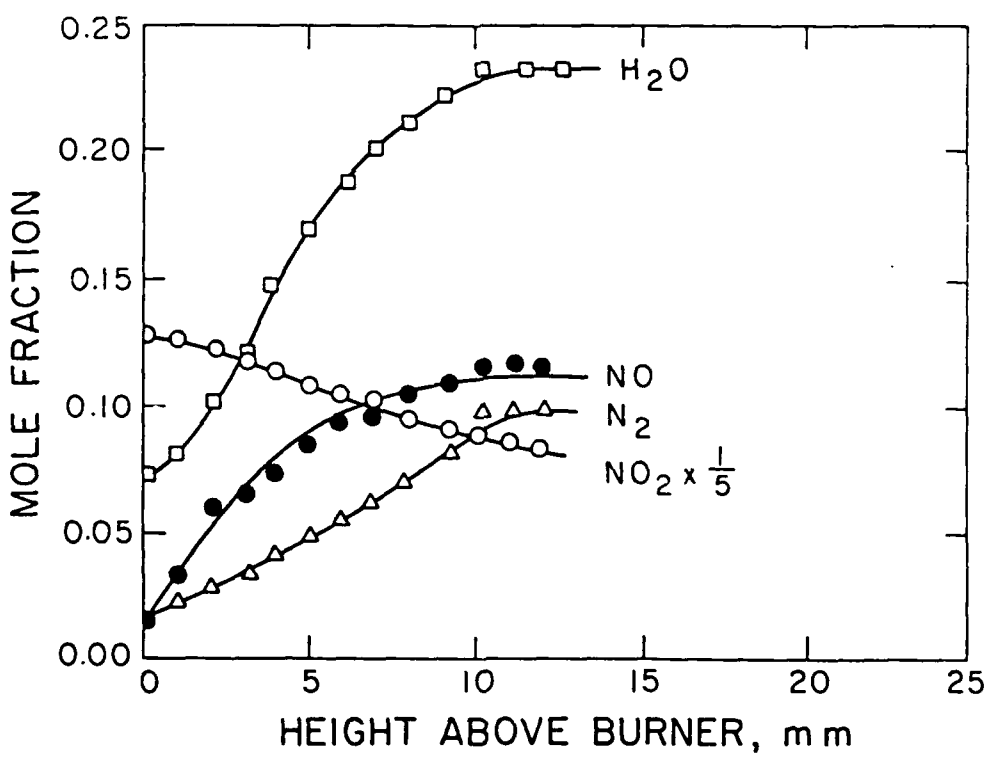
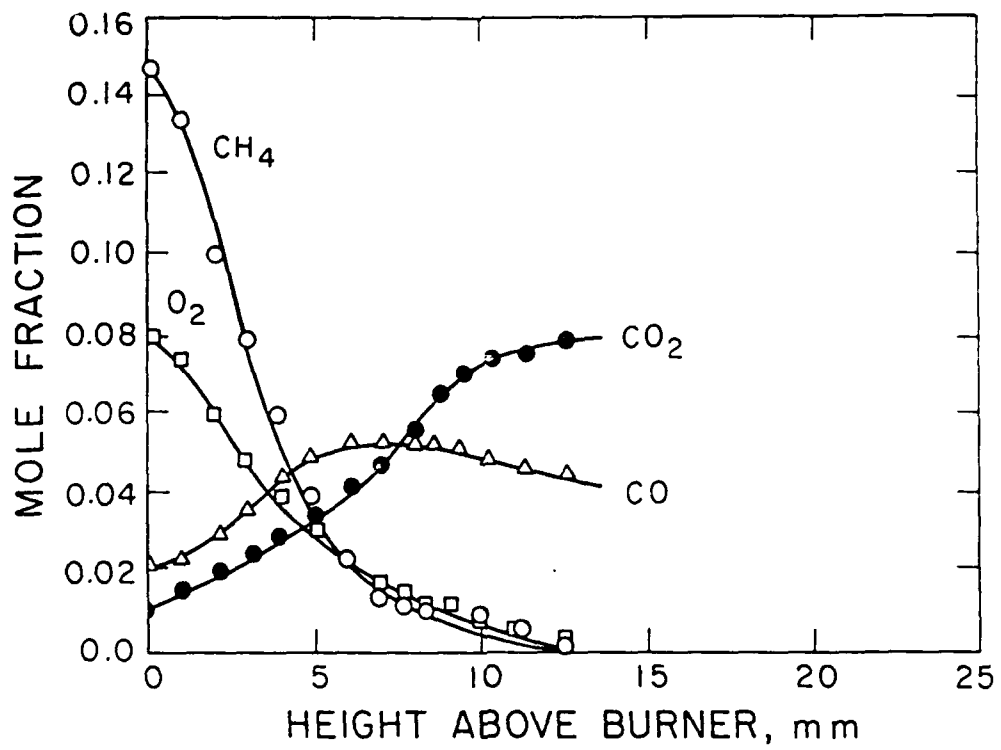


Figure 4. Profiles of nitrogen and carbon containing species measured in a CH₄/NO₂/O₂ flame at 50 torr. The reactant mole fractions are 0.16 CH₄, 0.73 NO₂ and 0.11 O₂.

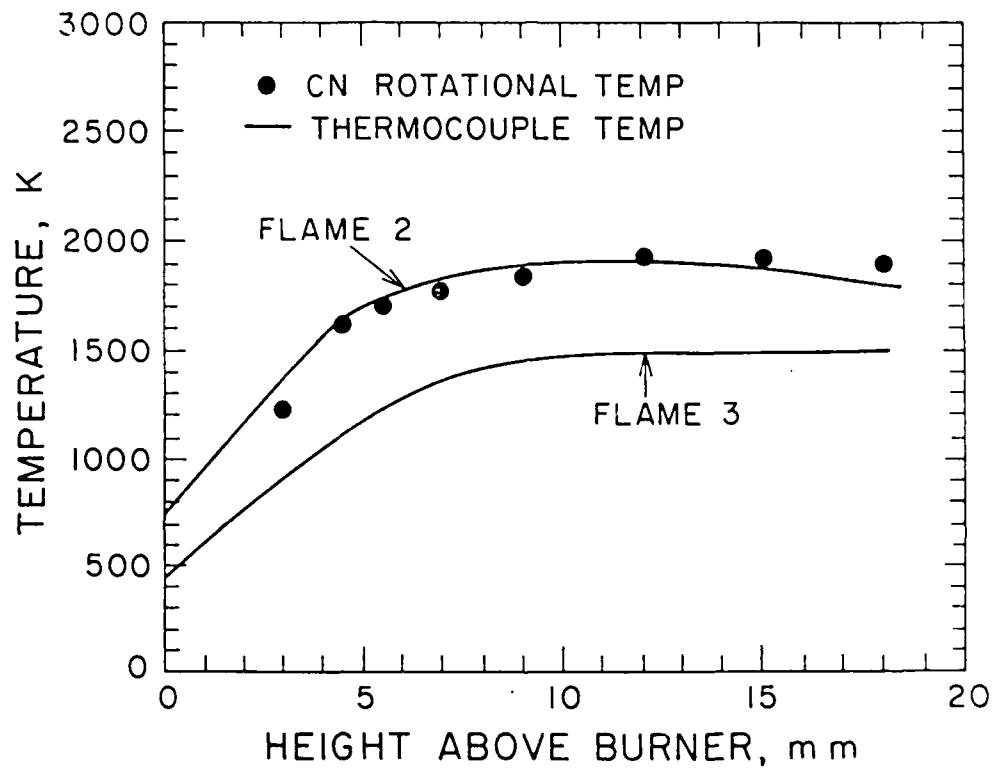


Figure 5. Temperature profiles measured with a thermocouple and by CN rotational temperature for the flame conditions in Figure 4 (Flame 3) and for a flame of 0.24 CH₄, 0.56 NO₂ and 0.20 O₂ at 50 torr (Flame 2).

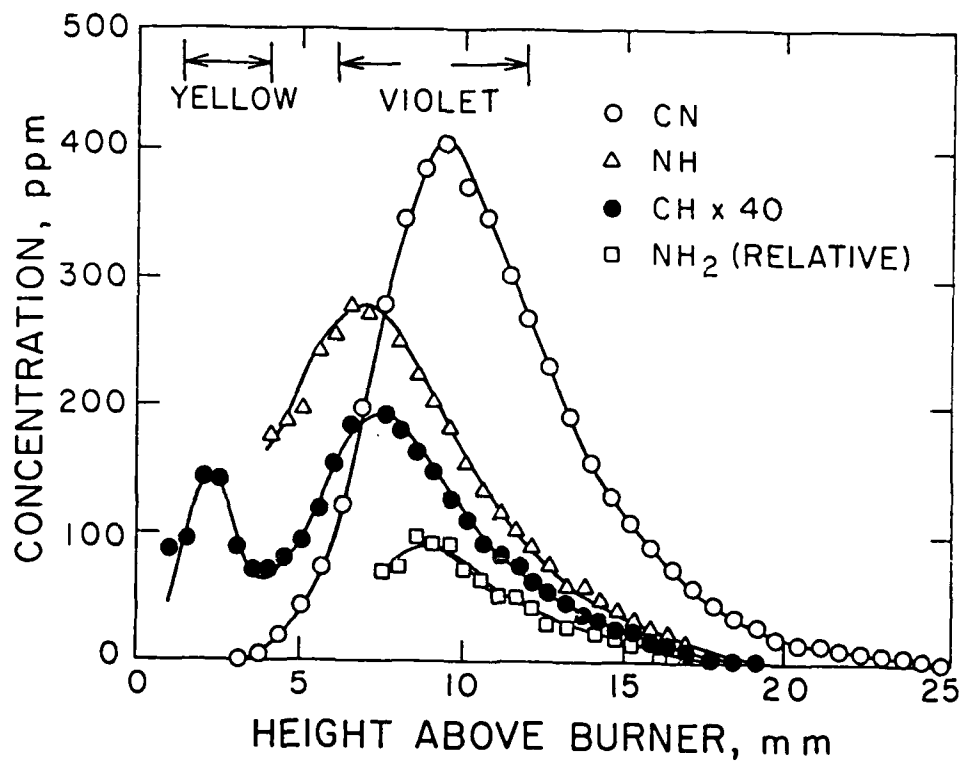


Figure 6. Profiles of intermediate species measured in a 50 torr CH₄/N₂/O₂ premixed flame. The reactant mole fractions are the same as those of Figure 4.



TABLE II. Spectral Transitions and Fluorescence Lines Used in Species Concentration Measurements

Species	Transition	Reference
CH	$B^2\Sigma^- \rightarrow X^2\Pi$ (0,0) band at 390 nm $P_1(6)$ line	Thorne, et al (1986)
CN	$B^2\Sigma^+ \rightarrow X^2\Sigma^+$ (0,0) band at 386 nm $R_1(14)$ line	Thorne, et al (1986)
NH ₂	$A^2A_1 \rightarrow X^2B_1$ (0,9,0) ← (0,0,0) band at 600 nm $P_{Q_1, N=7}$ line of Σ Sublevel	Green & Miller (1981)
NH	$A^3\Pi \rightarrow X^3\Sigma^-$ (0,0) band at 336 nm $R_1(6)$ line	Le & Vanpee (1985)
*OH	$A^2\Sigma^- \rightarrow X^2\Pi$ (0,0) band at 309 nm $Q_1(4)$ line	Le & Vanpee (1985)

* Species observed and identified but no quantitative data.

In view of the high concentration of NO formed from the decomposition of NO₂, the first path is probably most likely and may proceed through the formation of HCN. Both possibilities are consistent with the observation that the CH concentration peak precedes the CN peak.

An interpretation of the NH and NH₂ concentration profile is also possible. Most previous mechanisms would suggest that CH should precede NH or NH₂ when amine species are not added to the reactants, for example by



Experimental measurements of the concentration profiles of major and minor species have been made in laminar, premixed flat flames of CH₄/NO₂/O₂. These provide new data which may be used in the interpretation of the multiple reaction zones characteristic of some solid rocket propellant flames. With this understanding it may be possible to modify the composition of the propellant to influence the burning rate and the range of products formed.

REFERENCES

- E.A. Arden and J. Powling, "The Methyl Nitrite Decomposition Flame," *6th Symposium (International) on Combustion*, the Combustion Institute, New York, pp. 177-183, 1957.
- S.M. Banna and M.C. Branch, "Gas Chromatographic Determination of Nitrogenous Species in Combustion Products," *Combustion Science and Technology*, 24, 15-22, 1978.
- P.A. Bonczyk, A.C. Eckbreth, and J.F. Verdick, "Combustion Diagnostics by Laser Raman and Fluorescence Techniques," *Progress in Energy and Combustion Science*, 5, pp. 253-322, 1979.
- D.R. Crosley, Ed., "Laser Probes for Combustion Chemistry," *ACS Symposium Series 134*, American Chemical Society, Washington, DC, 1979.
- A.C. Eckbreth, "Recent Advances in Laser Diagnostics for Temperature and Species Concentration in Combustion," *18th Symposium (International) on Combustion*, The Combustion Institute, Pittsburgh, pp. 1471-1488, 1981.
- R.M. Fristrom and A.A. Westenberg (1965), *Flame Structure*, McGraw-Hill, New York, 1965.
- R.M. Green and J.A. Miller, "The Measurement of Relative Concentration Profiles of NH₂ Using Laser Absorption Spectroscopy," *J. Quant. Spectrosc. Radiat. Transfer*, 26, pp. 313-327, 1981.
- A.R. Hall and H.G. Wolfhand, "Multiple Reaction Zones in Low Pressure Flames with Ethyl and Methyl Nitrate, Methyl Nitrite and Nitromethane," *6th Symposium (International) on Combustion*, The Combustion Institute, New York, pp. 190-199, 1957.

J.A. Hicks, "The Low Pressure Decomposition Flame of Ethyl Nitrate," *8th Symposium (International) on Combustion*, The Williams and Wilkens Company, Baltimore, pp. 487-496, 1962.

N. Kubota, "Physiochemical Processes of HMX Propellant Combustion," *19th Symposium (International) on Combustion*, the Combustion Institute, Pittsburgh, pp. 775-785, 1982.

Q.N. Le and M. Vanpee, "Free Radical Concentration Measurements in Nitric Oxide-Acetylene Flames," *Combustion and Flame*, *62*, pp. 193-210, 1985.

J.A. Miller, M.C. Branch, W.J. McLean, D.W. Chandler, M.D. Smooke, and R.J. Kee, "On the Conversion of HCN to NO in H₂/O₂/HCN/Ar Flames at Low Pressure," *20th Symposium (International) on Combustion*, Combustion Institute, Pittsburgh, pp. 673-684, 1985.

W.G. Parker and H.G. Wolfhand, "Some Characteristics of Flames Supported by NO and NO₂," *4th Symposium (International) on Combustion*, The Williams and Wilkens Company, Baltimore, pp. 520-528, 1953.

L. Thorne, M.C. Branch, J.A. Miller and D. Chandler, "Interactions between Nitrogen and Carbon Species in H₂/O₂ Laminar Premixed Flames," *21st Symposium (International) on Combustion*, Combustion Institute, Pittsburgh, in press.

M.A. Schroeder, "Critical Analysis of Nitramine Decomposition Data: Product Distributions from HMX and RDX Decomposition," Technical Report BRL-TR-2659, U.S. Army Ballistics Research Laboratory, Aberdeen Proving Ground, Maryland, 107 pp., June 1985.

Recent Publications from This and Previous AFOSR Support

Ke Nguyen and M.C. Branch, "Ignition Characteristics of Bulk 302 Stainless Steel in a Pure Oxygen Environment," *Heat Transfer in Fire and Combustion Systems*, ASME HTD-Vol. 45, pp. 19-26, 1985.

J.A. Miller, M.C. Branch, W.J. McLan, D.W. Chandler, M.D. Smooke and R.J. Kee, "On the Conversion of H_2 to NO in $H_2/O_2/H_2N/Ar$ Flames at Low Pressure," *20th Symposium (International) on Combustion*, Combustion Institute, Pittsburgh, pp. 673-684, 1985.

Ke Nguyen and M.C. Branch, "Ignition of Bulk 302 Stainless Steel in Oxygen by Laser Heating," *Journal of Heat Transfer*, **108**, pp. 478-79, 1986.

Ke Nguyen and M.C. Branch, "Ignition of Bulk 302 Stainless Steel in Oxygen by Laser Heating," *Journal of Heat Transfer*, **108**, pp. 478-79, 1986.

Ke Nguyen and M.C. Branch, "Ignition Temperature of Bulk 1018 Carbon Steel in Oxygen," *Proceedings of the Eighth International Heat Transfer Conference*, **2**, pp. 857-62, 1986.

M.C. Branch, M. Sadeqi, K. Chawla, A. Alfarayedhi and K. Nguyen, "Flame Structure Studies by Computer-Controlled Experiments and Numerical Modeling," *Computational Methods and Experimental Measurements*, **2**, Springer-Verlag, Berlin, pp. 101-110, 1986.

L. Thorne, M.C. Branch, J.A. Miller and D. Chandler, "Interactions Between Nitrogen and Carbon Species in H_2/O_2 Laminar Premixed Flames," *21st Symposium (International) on Combustion*, August 3-7, 1986, Munich, Germany, in press.

Ke Nguyen and M.C. Branch, "Laser Ignition of Structural Metal Alloys in Bulk Form," submitted to *Combustion Science and Technology*.

Personnel

Abdulghani Al-Farayedhi, "Laser-Induced Fluorescence Studies of the Chemistry of CH_4/NO_2 and CH_2O/NO_2 Flames at Low Pressure," *PhD Thesis*, University of Colorado, Boulder, in progress.

Mohamed Sadeqi, "Flame Structure of Low Pressure Lamina Flat Flames of CH_4/NO_2 and CH_2O/NO_2 Mixtures," *PhD Thesis*, University of Colorado, Boulder, in progress.

Fuad Alasfour, "Flame Structure Modeling of the Gas Phase Decomposition Products of Nitramine Propellants," *PhD Thesis*, University of Colorado, Boulder, in progress.

Mohammed Habeebullah, "Laser-Induced Fluorescence Spectroscopy of $CH_2O/NO_2/NH_3$ Flames," *PhD Thesis*, University of Colorado, Boulder, in progress.

Interactions

The research has benefited from close interaction with related investigations on H-C-N flame reactions at Sandia Laboratories, Livermore. Professor Branch is a member of the advisory group for the Combustion of Energetic Materials Group at Sandia and participated in a workshop on "Combustion Probes for Solid Nitramines" there in June 1986.

Formal presentations of results obtained in this study have included an oral progress report and abstract entitled "Chemical Kinetics of Nitramine Propellants" presented at the AFOSR/AFRPL Rocket Propulsion Research Meeting, September 1986 in Lancaster, California. Other presentations and publications from this AFOSR support are summarized in Section IV.

Interaction with Edwards Air Force Base, California has been maintained. The studies at Edwards Air Force Base are providing data on the distribution of gas product species above the surface of solid rocket propellants, including nitramines. These are among the only studies of this type being conducted. Those studies and the studies we are conducting provide a unique combination of studies on the real propellant and on flames chemically representative of the propellant.

END

3-87

DTIC