

AD-A189 128 INVESTIGATION OF WAVEFORM DISTORTION IN MOBILE ELECTRIC POWER SYSTEMS(U) ARMY BELVOIR RESEARCH DEVELOPMENT AND ENGINEERING CENTER FORT BELVOIR VA P D HOWARD DEC 87 1/1

AD-A189 128 INVESTIGATION OF WAVEFORM DISTORTION IN MOBILE ELECTRIC POWER SYSTEMS(U) ARMY BELVOIR RESEARCH DEVELOPMENT AND ENGINEERING CENTER FORT BELVOIR VA P D HOWARD DEC 87 1/1

AD-A189 128 INVESTIGATION OF WAVEFORM DISTORTION IN MOBILE ELECTRIC POWER SYSTEMS(U) ARMY BELVOIR RESEARCH DEVELOPMENT AND ENGINEERING CENTER FORT BELVOIR VA P D HOWARD DEC 87 1/1


UNCLASSIFIED BRDEC-2459 F/G 10/2 NL

UNCLASSIFIED BRDEC-2459 F/G 10/2 NL

UNCLASSIFIED BRDEC-2459 F/G 10/2 NL

UNCLASSIFIED BRDEC-2459 F/G 10/2 NL

[illegible][illegible]

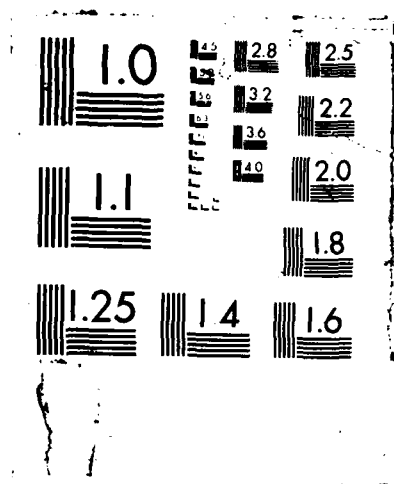

AD-A189 128

technical Report



United States Army
Belvoir Research, Development & Engineering Center
Fort Belvoir, Virginia 22060-5606

Report 2459

Investigation of Waveform Distortion in Mobile Electric Power Systems

Authored By: **Systems Assessment Team**

Report Date: **December 1987**

Approved for public release; distribution unlimited.

DTIC
ELECTE
DEC 31 1987
S E D

87 1 2 22 099

Destroy this report when it is no longer needed.
Do not return it to the originator.

The citation in this report of trade names of
commercially available products does not constitute
official endorsement or approval of the use of such
products.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188
Exp. Date: Jun 30, 1986

1a REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b RESTRICTIVE MARKINGS A189128	
2a SECURITY CLASSIFICATION AUTHORITY		3 DISTRIBUTION AVAILABILITY OF REPORT Approved for public release; distribution unlimited.	
2b DECLASSIFICATION/DOWNGRADING SCHEDULE		5 MONITORING ORGANIZATION REPORT NUMBER(S)	
4 PERFORMING ORGANIZATION REPORT NUMBER(S) 2459		7a NAME OF MONITORING ORGANIZATION	
6a NAME OF PERFORMING ORGANIZATION Belvoir RD&E Center	6b OFFICE SYMBOL (If applicable) STRBE-FEA	7b ADDRESS (City, State, and ZIP Code)	
6c ADDRESS (City, State, and ZIP Code) Logistics Support Directorate Environmental Control Division Fort Belvoir, VA 22060-5606		9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8a NAME OF FUNDING/SPONSORING ORGANIZATION	8b OFFICE SYMBOL (If applicable)	10 SOURCE OF FUNDING NUMBERS	
8c ADDRESS (City, State, and ZIP Code)		PROGRAM ELEMENT NO	PROJECT NO
		TASK NO	WORK UNIT ACCESSION NO
11 TITLE (Include Security Classification) INVESTIGATION OF WAVEFORM DISTORTION IN MOBILE ELECTRIC POWER SYSTEMS (U)			
12 PERSONAL AUTHOR(S) Peter D. Howard			
13a TYPE OF REPORT Final	13b TIME COVERED FROM Oct 86 TO Nov 87	14 DATE OF REPORT (Year, Month, Day) December 1987	15 PAGE COUNT 20
16 SUPPLEMENTARY NOTATION			
17 COSATI CODES		18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB GROUP	
		Waveform	
19 ABSTRACT (Continue on reverse if necessary and identify by block number)			
On 100 power generators, four were tested by Belvoir RD&E Center. The test results showed that the power distribution system was able to handle the electrical conditions that exist with the system under normal field conditions. The results are included in Inspector General's "Report on the Subject of Investigation of Mobile Electric Power Generation and Related Equipment," dated Feb 89. The test results and representative results are shown in the report. The test results showed that the power distribution system was able to handle the power generated and the test results are adequate to ensure that the system is able to handle the power.			
20 DISTRIBUTION STATEMENT OF ABSTRACT ☒ UNCLASSIFIED ☐ CONFIDENTIAL ☐ SECRET		ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
21 NAME OF PERSON OR ORGANIZATION Peter D. Howard		22 ADDRESS (Include Area Code) Belvoir, VA 22060	23 TITLE UNCLASSIFIED

PREFACE

In February 1986, the Office of the Inspector General released the *Report on the Survey of Acquisition of Mobile Electric Generators and Related Equipment*. That report resulted from allegations made by a commercial firm and other complainants regarding Department of Defense generators. The report's objectives were to:

- examine allegations regarding the cost and benefits associated with using "true-Root-Mean-Square" (true-RMS) meters and instruments instead of the absolute average responding devices currently used on Army generators;
- review the quality of power produced by mobile electric generators;
- determine if existing test specifications and practices ensure the desired quality of power is achieved; and
- evaluate specific allegations concerning procurement practices for watt converters, electrical test sets, and voltage regulators.

In the report's conclusions and recommendations, the Office of the Inspector General felt that the Army Materiel Command's Systems Assessment Office should make field tests of power distortion presence on weapon systems power lines. These tests were to demonstrate the electrical conditions that exist with systems under normal field conditions.

The Systems Assessment Team at the Belvoir Research, Development and Engineering Center was tasked by the Project Manager, Mobile Electric Power, to conduct a series of field tests. The purpose of these tests, which began in October 1986, was to determine representative levels of waveform distortion experienced under typical field operation conditions. Ten fielded systems were tested. The work was authorized under Department of the Army Project IS464714D194, Engine Driven Generators. The Product Assurance and Engineering Directorate's Test and Test Policy Division, in cooperation with the Systems Assessment Team, conducted the tests. This technical report describes the results of these tests.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification _____	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



TABLE OF CONTENTS

Section	Page
I Basic Procedure.....	1
II Systems and Results.....	1
III Discussion	4
IV Conclusions	5
V Future Plans.....	5
Appendix Detailed Test Procedure.....	A-1
Figures	
1 Test Data Summary (Voltage).....	6
2 Test Data Summary (Current).....	7
A-1 Voltage Waveform Deviation.....	A-3
A-2 Frequency Spectrum.....	A-4
A-3 Current Waveform Deviation.....	A-5
A-4 Frequency Spectrum.....	A-6
Tables	
1 Military Specifications for Generators.....	5
A-1 Instrumentation List.....	A-2

SECTION I. BASIC PROCEDURE

1. Select operating conditions and environments which are representative of actual field usage.
2. Connect waveform measuring equipment between generator set output and system.
3. Measure waveform, including total harmonic distortion and maximum single harmonic of phase voltages and currents imposed on the generator supplying power to the system.

(Refer to Appendix for detailed test procedure, instrumentation list, analysis procedures, and representative voltage and current waveforms.)

SECTION II. SYSTEMS AND RESULTS

The following data summarizes the results of the testing conducted on ten systems. There was no observed degradation of performance of the systems tested, even though the generator set specified voltage deviation factor was exceeded in five tests. Figures 1 and 2 present test data summaries.

1. One Topographic Support System (TSS) using two separate 60kW, 50/60 Hz generator sets (MEP-006A) as the power source.

The maximum power observed on the TSS during operation was 29.88 kW with a 0.98 power factor (pf). The maximum voltage deviation factor was 3.78%, with a total harmonic distortion (THD) of 1.66% on phase A during operation at 21.5 kW.

2. One AN/TPQ-36 FIREFINDER Radar System using a 10 kW, 400 Hz generator set (MEP-112A) as the power source.

The maximum power observed on the AN/TPQ-36 system during full operation with antenna radiating was 6.44 kW with a 0.98 pf. The maximum voltage deviation factor was 2.76%, with a THD of 1.16% on phase C during full operation. Operating under no load, the voltage deviation factor of 1.82% with THD of 0.60%.

3. Two PATRIOT EPP II's using 150 kW, 400 Hz gas turbine engine driven generator sets as the power source.

A review of prior data taken on the PATRIOT missile system showed a maximum THD of 8.03% on phase A in the high power radiate mode.

4. One AN/TAM-4 Bottle Cleaning/Charging Station using a 30 kW, 60 Hz generator set (MEP-005A) as the power source.

During the test of the AN/TAM-4A station, a maximum of 14.1 kW power demand (47% of rated power) was recorded. At this peak load, the voltage and current waveforms were the most distorted; the maximum voltage deviation factor was 4.93%, with a THD of 1.4%; and the maximum current deviation factor was 11%, with a THD of 4.7%.

5. One AN/TSC-118 High Frequency Central Communications Radio using a 60 kW, 400 Hz gas turbine engine driven generator set (MEP-404A) as the power source.

During the test of AN/TSC-118, a maximum of 41.4 kW power demand (69% of rated power) was recorded. The voltage and current waveforms at this peak load were the most distorted; the voltage deviation factor was 4.94%, with a maximum THD of 3.17%; and the current deviation factor was 7.22%, with a maximum THD of 8.58%. Operating under no load, the voltage deviation factor was 2.04% with a maximum THD of 1.68%.

6. Two Digital Tropospheric Scatter Radio Terminal Sets:

One AN/TRC-170 V(2) using a 30 kW, 60 Hz generator set (MEP-005A) as a power source.

During the test of AN/TRC-170 V(2), a maximum of 19.26 kW power demand (64% of rated power) was recorded. The voltage waveforms at this peak load and the current waveforms when the systems was operating at 5.14 kW (17% of rated power) were the most distorted. The voltage deviation factor was 22%, with a maximum THD of 8.5%; and the current deviation factor was 36.6%, with a maximum THD of 25%. Operating under no load, the voltage deviation factor was 1.63% with a maximum THD of 0.95%.

One AN/TRC-170 V(3) using a 10 kW, 60 Hz generator set (MEP-003A) as a power source.

During the test of the AN/TRC-170 V(3), a maximum of 10.8 kW power demand (108% of rated power) was recorded. The voltage waveforms at this peak load and the current waveforms when the system was operating at 3.63 kW (36% of rated power) were the most distorted. The voltage deviation factor was 17.3%, with a maximum THD of 8.6%; and the current deviation factor was 33%, with a THD of 30%. Operating under no load, the voltage deviation factor was 2.33% with a maximum THD of 1.55%.

7. Pershing II (PII) Missile System.

One Platoon Control Central; using its allocated trailer mounted 30 kW, 60 Hz generator set (MEP-005A) as a power source.

During the test, a maximum of 7.3 kW power demand (24% of rated power) was recorded. At this peak load, the voltage and current waveforms of phase C were the most distorted. The voltage deviation factor was 2.1%, with a THD of 0.90%; and the current deviation factor was 10.4%, with a THD of 5.6%. Operating under no load, the voltage deviation factor was 1.31% with a maximum THD of 0.78%.

One Guided Missile Erector Launcher using its own 30 kW, 60 Hz generator set (MEP-005A) as a power source.

During the test, a maximum of 7.88 kW power demand (26% of rated power) was recorded. The voltage and the current waveforms of phase A, when the system was operating at 3.6 kW (12% of rated power), were most distorted. The voltage deviation factor was 11.5%, with a maximum THD of 2.6%; and the current deviation factor was 20.3%, with a THD of 12.5%. Operating under no load, the voltage deviation factor was 1.39% with a maximum THD of 0.79%.

8. One Forward Sensor Interface and Control Module of the All Source Analysis System using a 10 kW, 60 Hz generator set (MEP-003A) as the power source.

During the test of the forward Sensor Interface and Control Module (FSIC) of the All Source Analysis System (ASAS), a maximum of 4.8 kW (49% of rated power) was recorded. The voltage waveforms were the most distorted when the generator was operating at a recorded demand of 3.97 kW (39.7% of rated power). The maximum THD at this level was 2.47%, and the deviation factor was 4.83%. The current waveforms were the most distorted when the generator was operating at a demand of 4.68 kW (46.8% of rated power). The current deviation factor was 34.6%, with a maximum THD of 22.7%. Operating under no load the voltage deviation factor was 4.32% with a maximum THD of 2.0%.

9. Hawk Missile System:

One Battery Command Post (BCP), one Continuous Wave Acquisition Radar (CWAR), and one Pulse Acquisition Radar (PAR) using a 60 kW, 400 Hz generator set (MEP-115A) as the power source.

During the test, a maximum of 19.9 kW power demand (33.2% rated power) was recorded. At this peak load, the voltage waveforms were most distorted. The voltage deviation factor was 6.12% with a THD of 5.10%. The current waveforms of the BCP under full load test (3.53 kW or 5.9% of rated power) were the most distorted. The current deviation factor was 91.7% with a THD of 55.0%. Operating under no load, the voltage deviation factor was 1.73% with a maximum THD of 0.72%.

One High Power Illuminator (HPI) and three launchers with nine dummy missiles, using a 60 kW, 400 Hz generator set (MEP-115A) as the power source.

During the test, a maximum of 25.6 kW power demand (42.6% of rated power) was recorded. With the HPI at full load test (22.1 kW or 33.9% of rated power), the voltage deviation factor was 8.62% with a THD of 6.17%. The current deviation factor was 40.7% with a THD of 30.9%. Operating under no load, the voltage deviation factor was 1.73% with a maximum THD of 0.72%.

10. Turbine Engine Power Plant (TEEP); the unit was a Utility Power Plant modified to supply 60 kW, 60 Hz electric power to a field hospital set-up.

During the test, a maximum of 8.93 kW power demand (14.8% of rated power) was recorded. At this peak load, the voltage and current waveforms were the most distorted. The voltage deviation factor was 1.27% with a THD of 0.69%, and the current deviation factor was 3.34% with a THD of 1.87%.

SECTION III. DISCUSSION

In all the tests performed, two waveform parameters were measured: individual harmonics, and total harmonic distortion. The voltage and current deviation factors were calculated from the recorded data. For the voltage waveform, the related Military Specifications (see Table 1) on generator sets specifies a maximum voltage deviation factor and a maximum single harmonic at no load, rated load at unity power factor, and rated load at 0.8 power factor lagging when connected to a linear load. There presently are no specifications for current waveform or for total harmonic distortion. Even though there are no specific limits for current deviation, this "harmonic current injection" was measured to show its affect on voltage waveform.

On five occasions, the voltage deviation factor was greater than the maximum specified for the generator set when powering a linear load. Two of these instances occurred with the Digital Tropo Radio System. Both times, the system was in the radiate mode: once with on high-power amplifier, and once with two high-power amplifiers operating. The third occasion was with the Pershing II Missile System Erector Launcher. The system was in the count-down mode, with the inertial measurement system and the target loading system operating. The fourth and fifth occasions occurred with the Hawk missile system; with the BCP under full load test, and with the HPI operating with three missile launchers. Although the voltage deviation factor was significant, at no time was performance degraded for any of the systems measured.

Table 1. Military Specifications on Generator Sets

MIL-G-52884	15 to 200 kW
Voltage Deviation Factor	5%
Single Frequency Harmonic	2%
MIL-G-52889	5 kW and 10 kW (Single phase/Three phase)
Voltage Deviation Factor	6% / 5%
Single Frequency Harmonic	3% / 2%

SECTION IV. CONCLUSIONS

1. No system performance degradation was observed during the testing even though the voltage deviation factor exceeded the generator set specification in several instances.
2. System designers apparently accommodate for waveform distortion in excess of that specified for the generator set.
3. Based on the test results, the present generator set specifications for waveform requirements are adequate to ensure satisfactory system operation.

SECTION V. FUTURE PLANS

Waveform distortion measurements normally will be recorded during all on-site surveys of field power systems. In addition, the Product Assurance and Engineering Directorate, Belvoir RD&E Center, will update and maintain the waveform database indefinitely. The database consists of file copies of all the individual test reports to date and all the magnetic media (raw data).

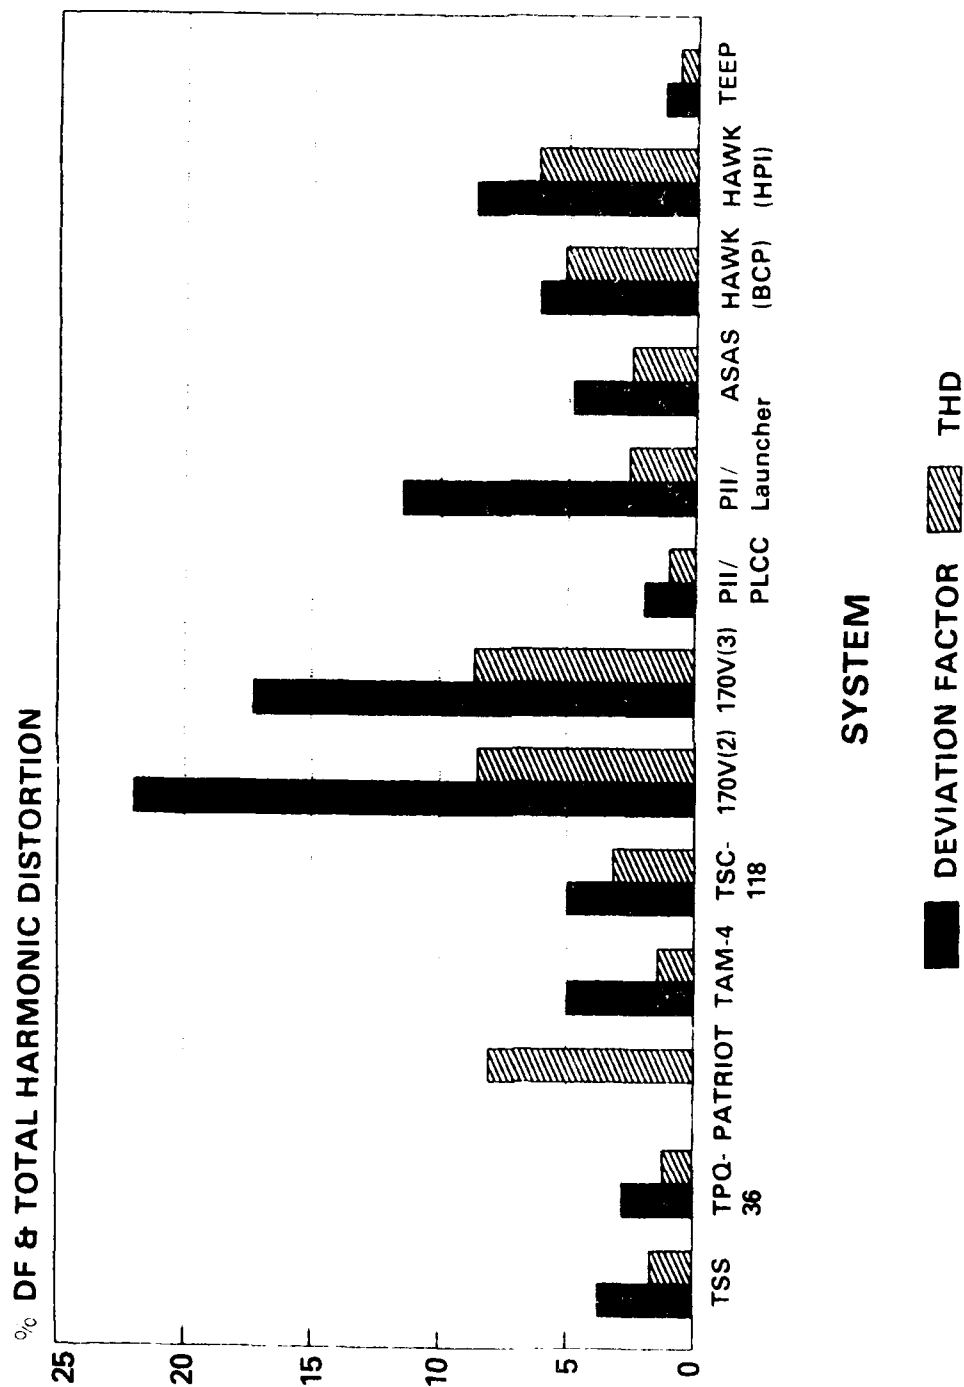


Figure 1. Test Data Summary (Voltage)

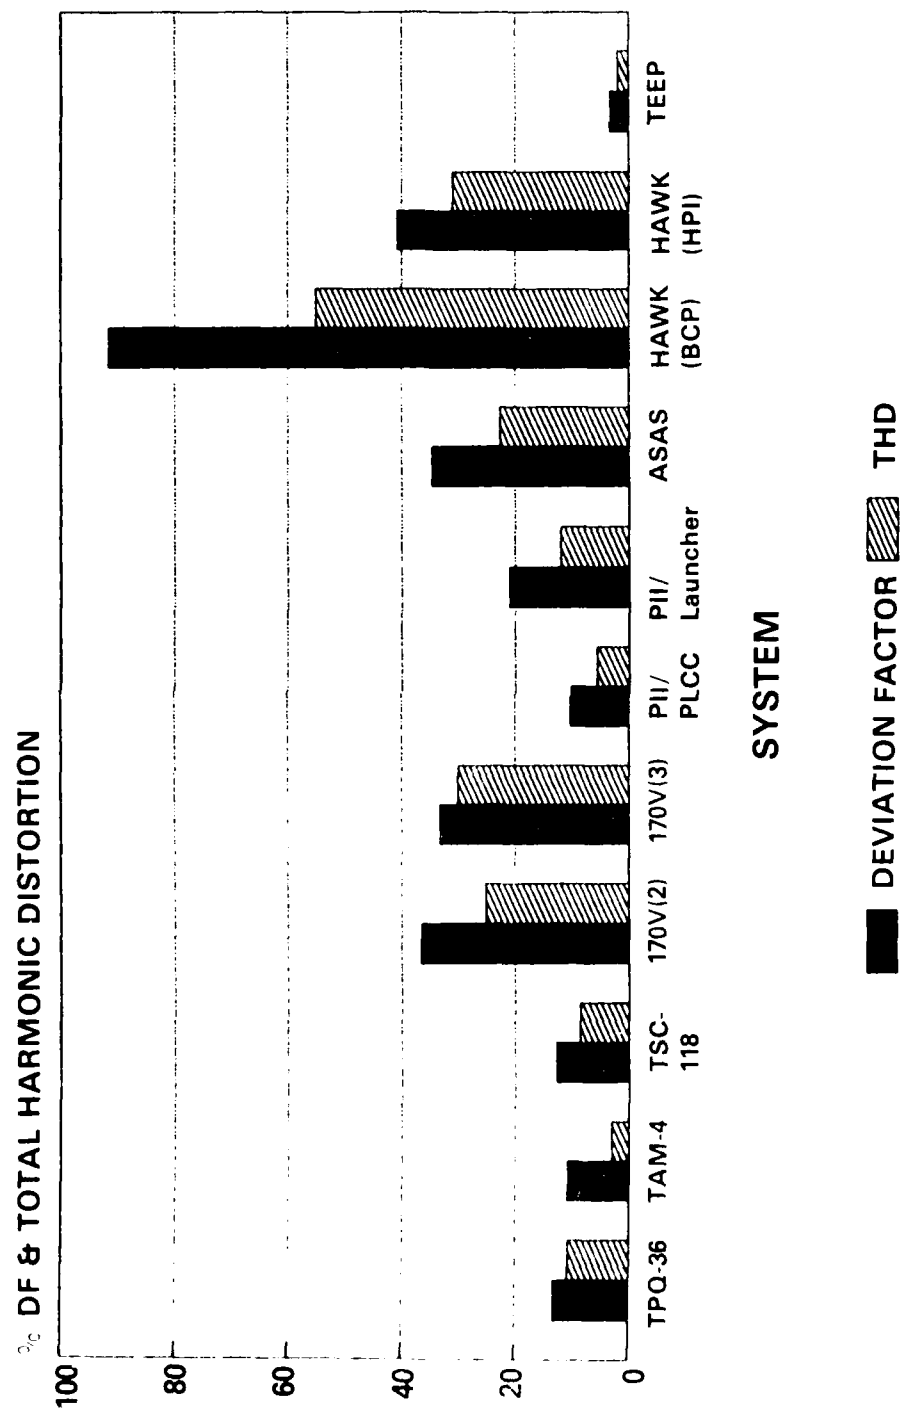


Figure 2. Test Data Summary (Current)

APPENDIX: DETAILED TEST PROCEDURE

INSTRUMENTATION

The Belvoir Power Systems Assessment Van was used to transport personnel and equipment to the individual test sites and served as a mobile instrumentation laboratory.

The Dranetz 808 Power Demand Analyzer was used to record power parameters. It was attached for three-phase monitoring via clamp-on transformers on each phase and clip lead voltage sensing to each phase, neutral, and earth ground. The unit was then programmed to measure volts, amps, kVA, kW, and power factor at 1- minute intervals. In addition, the analyzer was manually triggered after each mode of operation change.

The Dranetz 3105 Precision Power and Harmonic Analyzer was used to record voltage and current waveform data. The analyzer is a unique microprocessor-based dual channel precision instrument designed to perform complex power measurements and waveform analysis. Employing Fast Fourier Transform analysis techniques, the analyzer measures fundamental, total, and each harmonic to the 50th of all parameters within its frequency range (1 Hz to 500 kHz), with accuracies of up to $\pm 0.04\%$ (magnitude) and ± 0.03 degree.

- The two non-isolated channels were used. Since both inputs must be voltage, current transformers were used to monitor current. One channel was programmed for amps, and a scale of volt-ampere ratio was entered to provide the volt-ampere conversion. The other channel was programmed for volts.
- The first channel (voltage) was coupled to the output of a three-phase voltage switch, which was attached to the generator set via a four-conductor cable so that each line-to-neutral voltage could be monitored separately.
- The second channel (current) was coupled to the output of another three-phase switch, which was attached to the lines via a special, high precision, clamp-on type current transformer so that a voltage proportional to each phase current could be monitored separately.

The Harmonic Analyzer was then programmed for:

- Triggering manually;
- Taking 256 samples per measurement, and four measurements per reading;
- Measuring the total root mean square (RMS) value of the waveforms;
- measuring the RMS value of the fundamental and the percent of RMS with respect to the fundamental of the 2nd to the 50th harmonic;

- Measuring the phase angles with respect to the fundamental of the 2nd to the 50th harmonic;
- Measuring the fundamental frequency; and
- Performing complex voltage, current, and power measurements.

Table A-1. Instrumentation List

Description	Manufacturer	Model
Power Demand Analyzer	Dranetz	808
Precision Power and Harmonic Analyzer	Dranetz	3105
Desktop computer	Tektronix	4052 A
Storage Oscilloscope	Nicolet	2090

ANALYSIS

The procedure for calculating the waveform deviation factor and constructing the distorted wave utilities: (1) data obtained from the Precision Harmonic Analyzer, a Tektronix 4052A Desktop computer, and (2) the software to perform mathematical calculations and comparisons, and to provide graphic outputs of the results.

1. The distorted wave was mathematically formed by summing its fundamental wave and every harmonic wave up to the 50th harmonic. Each individual wave was mathematically formed using (in the sine wave equation) the fundamental frequency, its harmonic (wave) number, the percent RMS value of its magnitude, and its phase angle with respect to the fundamental.
2. The equivalent sine wave was mathematically formed using total RMS value of the distorted waveform and the fundamental frequency.
3. The deviation factor of a wave is defined as the ratio of the maximum difference between corresponding ordinates of the wave and of the equivalent sine wave to the maximum ordinate of the equivalent sine wave when the waves are superposed in such a way as to make the maximum difference as small as possible. Knowing the equation which describes the equivalent sine wave, and the set of equations which describes the distorted wave, 256 corresponding ordinates (for one complete cycle) were calculated, and the deviation factor was determined by shifting the waves until the maximum deviation factor was determined.
4. Finally, the computer drew the equivalent sine wave, the distorted wave, and the frequency spectrum of the distorted wave.

HI. FRE. CENTRAL COMMUNICATIONS RADIO (AN/TSC-118)

60 KW, 400 HZ	31-MAR-87
MOD/N: 2CM355719	120/208 VOLTS
SER/N: LA355719	L3-L0
% POWER = 31	
THD = 2.35%	

3.59% @ 254.1 Deg.


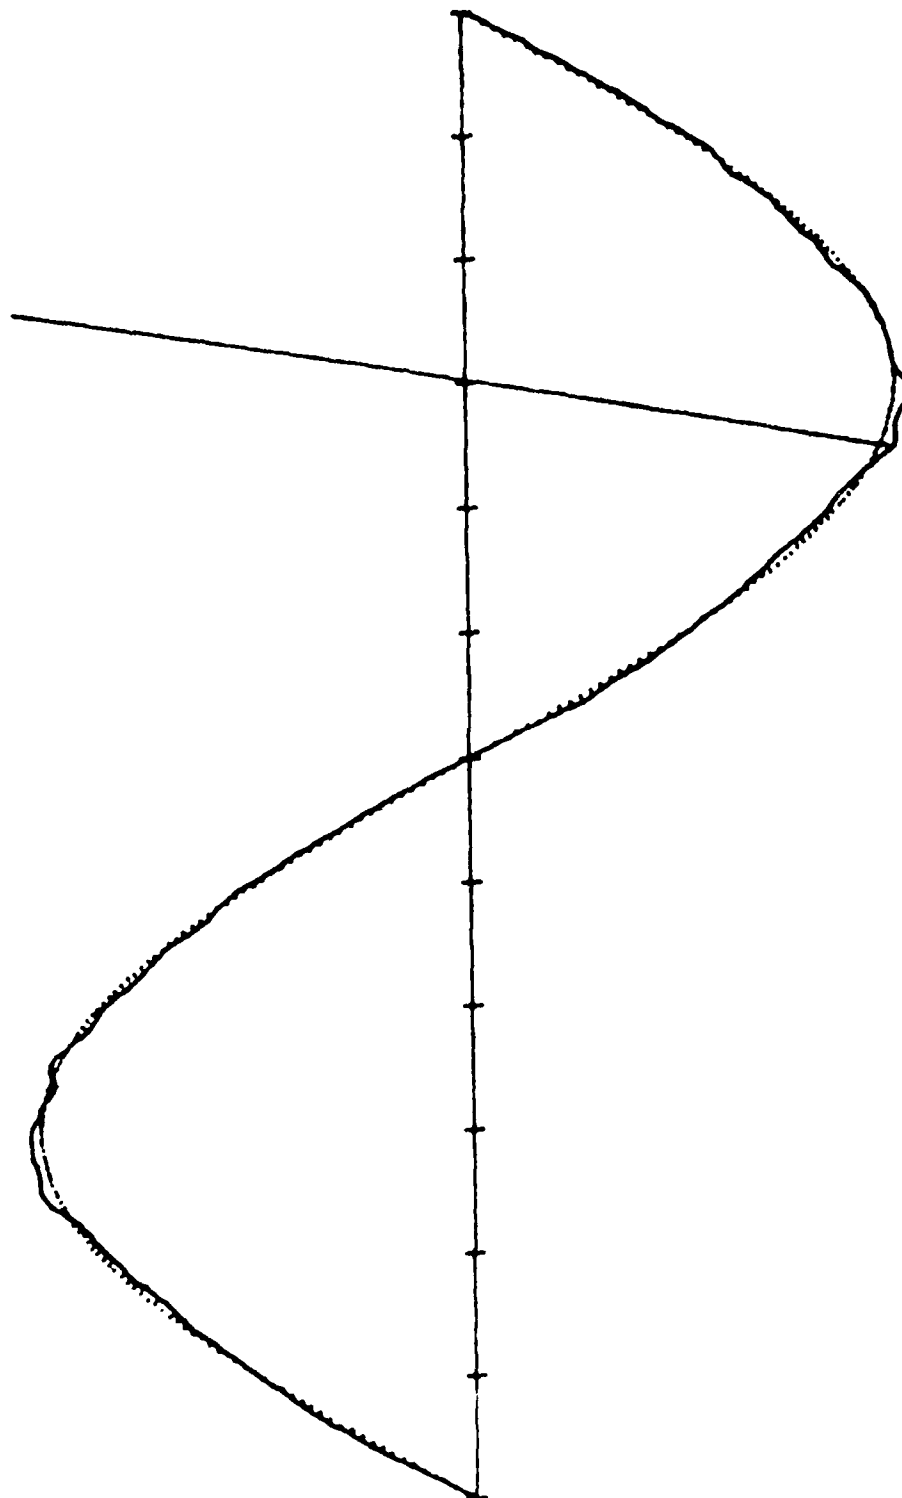


Figure A-1. Voltage Waveform Deviation

THE FREQUENCY SPECTRUM

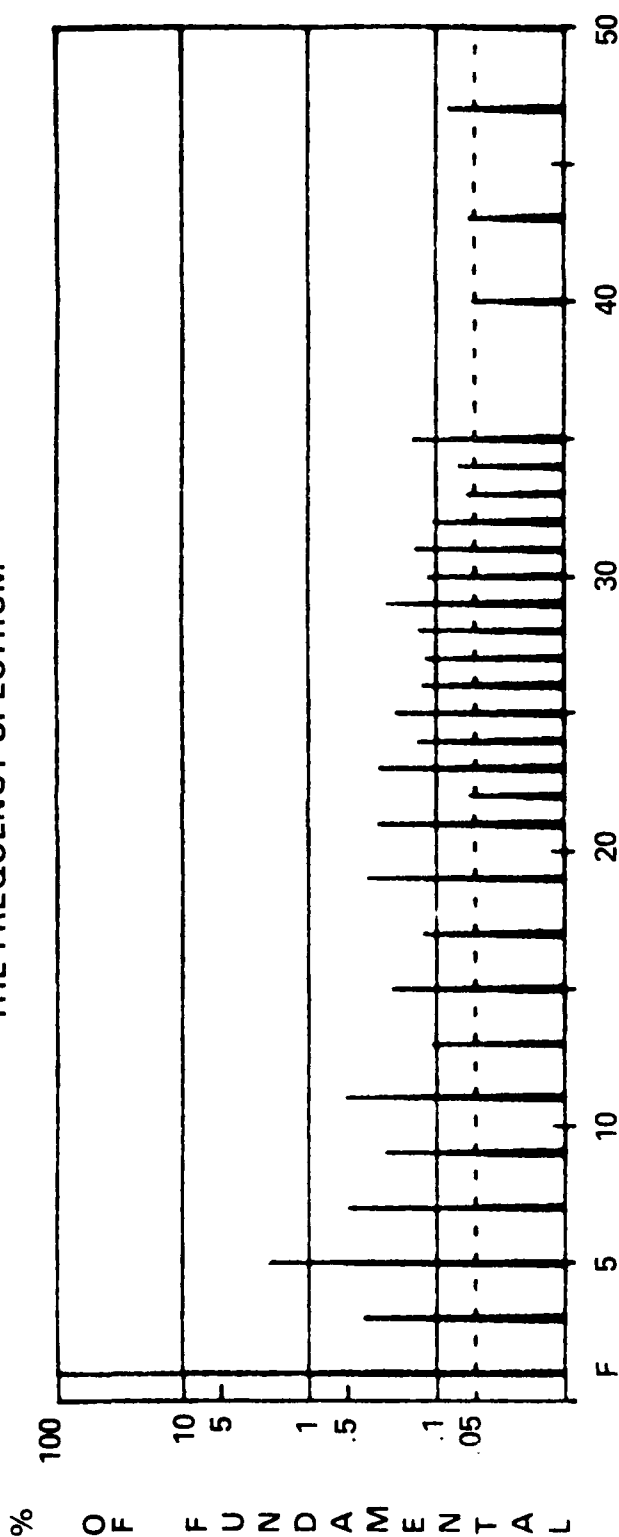

HARMONIC CONTENT > .05%

FUND	3	5	7	9	11	13	15	17	19	21
100	0.36	2.00	0.49	0.24	0.50	0.11	0.22	0.12	0.34	0.28
22	23	24	25	26	27	28	29	30	31	32
0.05	0.28	0.14	0.21	0.13	0.12	0.14	0.24	0.11	0.14	0.10
33	34	35	40	43	47	50				
0.06	0.07	0.15	0.05	0.06	0.08	0.11				

THD = 2.35%

Figure A-2. Frequency Spectrum

HI. FRE. CENTRAL COMMUNICATIONS RADIO (AN/TSC-118)

60 KW, 400 HZ	31-MAR-87
MOD/N: 2CM355719	120/208 VOLTS
SER/N: LA355719	L3-L0
% POWER = 31	
THD = 6.72%	

10.93% @ 210.4 Deg.


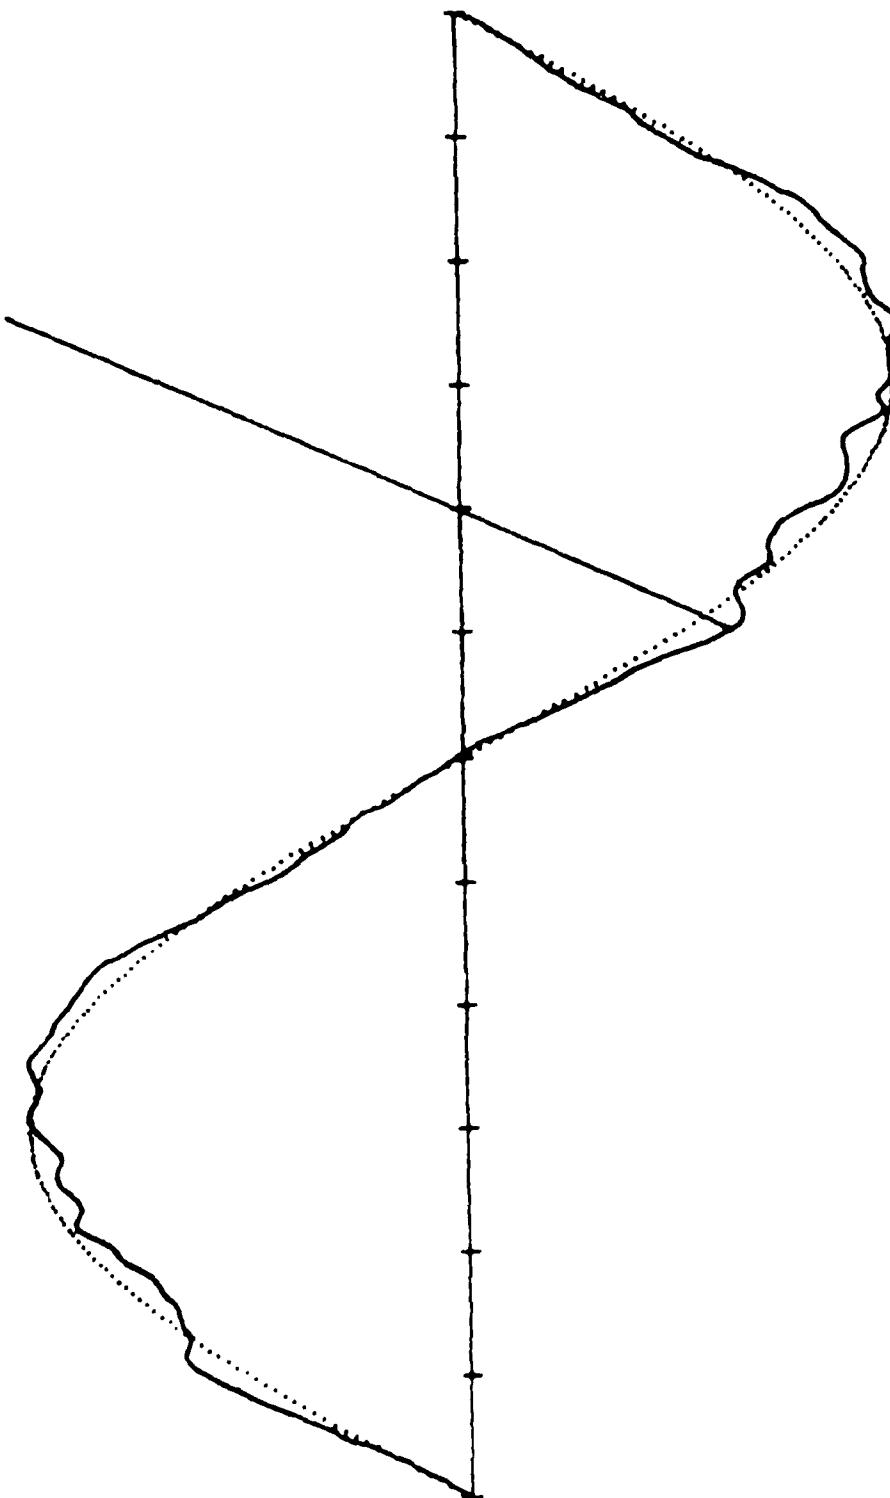


Figure A-3. Current Waveform Deviation

THE FREQUENCY SPECTRUM

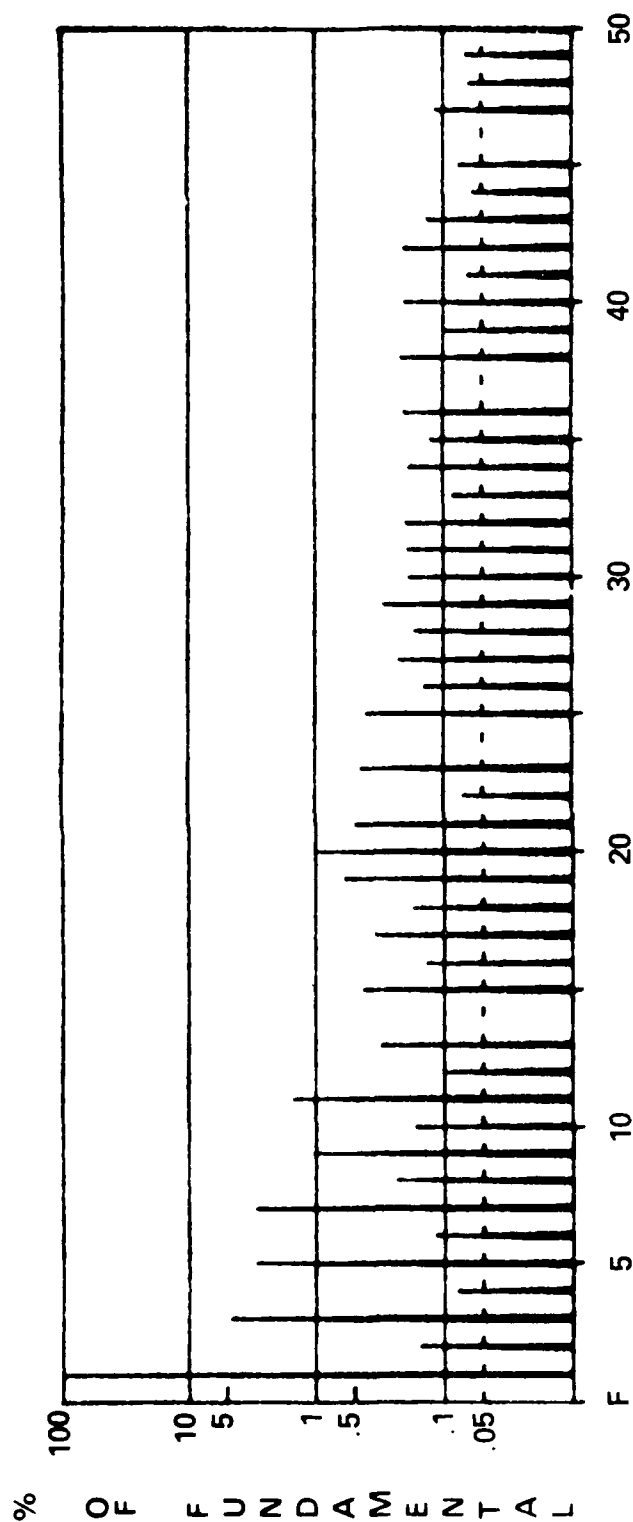

HARMONIC CONTENT > .05%

FUND	2	3	4	5	6	7	8	9	10	11
100	0.15	4.58	0.08	2.91	0.12	2.90	0.23	1.05	0.17	1.49
12	13	15	16	17	18	19	20	21	22	23
0.09	0.31	0.43	0.14	0.35	0.17	0.59	0.91	0.49	0.07	0.44
25	26	27	28	29	30	31	32	33	34	34
0.39	0.14	0.22	0.17	0.29	0.18	0.19	0.19	0.08	0.18	0.12
36	38	39	40	41	42	43	44	45	47	48
0.20	0.21	0.09	0.20	0.06	0.20	0.13	0.06	0.07	0.11	0.06

THD = 6.72%

Figure A-4. Frequency Spectrum

DISTRIBUTION FOR REPORT NO. 2459

DEPARTMENT OF DEFENSE

- | | | | |
|----|---|---|--|
| 1 | Director, Technical Information
Defense Advanced Research Projects
Agency
1400 Wilson Blvd.
Arlington, VA 22209 | 1 | Commander
US Army Aberdeen Proving Ground
ATTN: STEAP-MT-U (GE Branch)
Aberdeen Proving Ground, MD 21005 |
| 1 | Director
Defense Nuclear Agency
ATTN: TITL
Washington, DC 20305 | 1 | Director
US Army Materiel Systems
Analysis Agency
ATTN: AMXSY-MP
Aberdeen Proving Ground, MD 21010-5071 |
| 2 | Defense Technical Information Center
Cameron Station
ATTN: DTIC-FDAC
Alexandria, VA 22304-6145 | 1 | Director
US Army Ballistics Research Laboratory
ATTN: AMXBR-OD-ST (STINFO)
Aberdeen Proving Ground, MD 21010-5066 |
| 10 | DOD Project Manager
Mobile Electric Power
7500 Backlick Road
Springfield, VA 22150 | 1 | Director
US Army Engineer Waterways
Experiment Station
ATTN: Chief, Library Branch
Technical Information Center
Vicksburg, MS 39180 |

DEPARTMENT OF THE ARMY

- | | | | |
|---|---|---|--|
| 1 | HQDA (DAMA-AOA-M)
Washington, DC 20310 | 1 | Commander
US Army Armament Research &
Development Command
ATTN: SMCAR-TSS
Dover, NJ 07801-5001 |
| 1 | HQDA (DALO-TSM)
Washington, DC 20310 | 1 | Commander
US Army Troop Support & Aviation
Materiel Readiness Command
ATTN: DRSTS-MES (1)
4300 Goodfellow Blvd.
St. Louis, MO 63120 |
| 1 | HQDA (DAEN-RDL)
Washington, DC 20314 | 2 | Director
Petrol & Eld Svc Dept
US Army Quartermaster School
Fort Lee, VA 23801 |
| 1 | HQDA (DAEN-MPE-T)
Washington, DC 20314 | 1 | US Army Tank Automotive Command
ATTN: DRSTA-TSL
Warren, MI 48090 |
| 1 | Commander
US Army Missile Research & Development
Command
ATTN: AMSMI-PR
Redstone Arsenal, AL 35809 | 1 | Commander
US Army Electronics Research &
Development Command
ATTN: DEISD-L
Fort Monmouth, NJ 07703-5301 |
| 1 | Director
Army Materials and Mechanics
Research Center
ATTN: AMXMR-RL Technical Library
Watertown, MA 02172-0001 | | |
| 1 | Commander
Chemical Research R&D Center
ATTN: SMCCR-SPS (Tech Library)
Aberdeen Proving Ground, MD 21010-5423 | | |

- 1 President
US Army Aviation Test Board
ATTN: STEBG-PO
Fort Rucker, AL 36360
- 1 US Army Aviation School Library
PO Drawer O
Fort Rucker, AL 36360
- 1 HQ 193D Infantry Brigade (Pan)
ATTN: AFZU-FE
APO Miami 34004
- 2 Special Forces Detachment, Europe
ATTN: PBO
APO New York 09050
- 2 Engineer Representative
USA Research & Standardization
Group (Europe)
Box 65
FPO 09510
- 1 Commander
Rock Island Arsenal
ATTN: SARRI-LPL
Rock Island, IL 61299-7300
- 1 HQDA
ODCSLOG
DALO-TSE
Room 1E588, Pentagon
Washington, DC 20310-0561
- 1 Commandant
US Army Engineer School
ATZA-CDD
Fort Belvoir, VA 22060
- 2 Engineer Representative
USA Research & Standardization
Group (Europe)
Box 65
FPO 09510
- 1 President
US Army Airborne, Communications &
Electronics Board
ATTN: STEBF-ABTD
Fort Bragg, NC 28307
- 1 President
US Army Armor and Engineer Board
ATTN: ATZK-AE-PD-E
Fort Knox, KY 40121-5470

- 1 Commander and Director
USA FESA
ATTN: FESA-IS
Fort Belvoir, VA 22060
- 1 Director
US Army TRADOC
Systems Analysis Activity
ATTN: ATAA SE (Tech Lib)
White Sands Missile Range, NM 88002

1 BELVOIR RD&E CENTER

- Commander STRBE-Z
- Deputy Commander STRBE-ZD
- Technical Director STRBE-ZT
- Assoc Tech Dir (I&A) STRBE-ZTE
- Assoc Tech Dir (R&D) STRBE-ZTR
- Executive Officer STRBE-ZX
- Sergeant Major STRBE-ZM
- Advanced Systems Concept Dir STRBE-H
- Program Planning Div STRBE-HP
- Foreign Intelligence Div STRBE-HF
- Systems and Concepts Div STRBE-HC
- 4 STRBE-F
- 3 STRBE-FF
- 50 STRBE-FFA
- 3 STRBE-BPG
- 3 Security Ofc (for liaison
officers) STRBE-S
- 2 Tech Library STRBE-BI
- 1 Public Affairs Ofc STRBE-I
- 1 Ofc of Chief Counsel STRBE-I

DEPARTMENT OF THE NAVY

- 1 Director, Physics Program (421)
Office of Naval Research
Arlington, VA 22217
- 2 Commander
Naval Facilities Engineering Command
Department of the Navy
ATTN: Code 032 B
062
200 Stovall St.
Alexandria, VA 22332
- 1 US Naval Oceanographic Office
Navy Library NSTL Station
Bay St. Louis, MO 39522
- 1 Library (Code F08A)
Civil Engineering Laboratory
Naval Construction Battalion Center
Port Hueneme, CA 93043

DEPARTMENT OF THE AIR FORCE

- 1 HQ USAF/RDPT
ATTN: Commander
Washington, DC 20330
- 1 HQ USAF/PREEU
Chief, Utilities Branch
Washington, DC 20330
- 1 US Air Force
HQ Air Force Engineering & Service Ctr
Technical Library FL7050
Tyndall AFB, FL 32403

END
DATE
FILMED
MARCH
1988
DTIC