

AD-A192 973

AFWAL-TR-87-3055
Volume I

IMPROVEMENT OF HEAD-UP DISPLAY STANDARDS

Volume I: Head-Up Display Design Guide (Appendix)

Richard L. Newman
Crew Systems Consultants
PO Box 481
Yellow Springs, OH 45387

September 1987

DTIC
ELECTE
MAY 24 1988
S CD D

Final Report for Period Oct 84 - June 87

Approved for public release; distribution unlimited.

FLIGHT DYNAMICS LABORATORY
AIR FORCE WRIGHT AERONAUTICAL LABORATORIES
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433-6553




NOTICE


When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely Government-related procurement, the United States Government incurs no responsibility or any obligation whatsoever. The fact that the Government may have formulated or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication, or otherwise in any manner construed, as licensing the holder, or any other person or corporation; or as conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This report has been reviewed by the Office of Public Affairs (ASD/PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.



William L. Augustine
Electronics Engineer
Information Interface Group

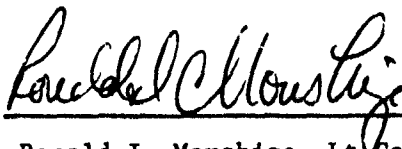

Ronald I. Morshige, Lt Col, USAF
Chief, Crew Systems Development Branch

FOR THE COMMANDER



EUGENE A. SMITH, Lt Col, USAF
Chief, Flight Control Division
Flight Dynamics Laboratory

If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization please notify AFWAL/FIGRB, Wright-Patterson AFB, OH 45433- 6553 to help us maintain a current mailing list.

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

A192973

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS NONE	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for Public Release; Distribution Unlimited	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			
4. PERFORMING ORGANIZATION REPORT NUMBER(S) TR-87-15		5. MONITORING ORGANIZATION REPORT NUMBER(S) AFWAL-TR-87-3055, Vol I	
6a. NAME OF PERFORMING ORGANIZATION Crew Systems Consultants	6b. OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION Flight Dynamics Laboratory (AFWAL/FIGRB) AF Wright Aeronautical Laboratories	
6c. ADDRESS (City, State and ZIP Code) Post Office Box 481 Yellow Springs, OH 45387		7b. ADDRESS (City, State and ZIP Code) Wright-Patterson AFB, OH 45433-6553	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION AFWAL/FIGRB	8b. OFFICE SYMBOL (If applicable) FIGRB	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER F33615-85-C-3602	
8c. ADDRESS (City, State and ZIP Code) Wright-Patterson AFB, OH 45433-6553		10. SOURCE OF FUNDING NOS.	
		PROGRAM ELEMENT NO. 65502F	PROJECT NO. 3005
		TASK NO. 30	WORK UNIT NO. 21
11. TITLE (Include Security Classification) Improvement of Head-Up Display Standards			
12. PERSONAL AUTHOR(S) Richard L. Newman			
13a. TYPE OF REPORT Final	13b. TIME COVERED FROM 841001 TO 870615	14. DATE OF REPORT (Yr., Mo., Day) Sept 1987	15. PAGE COUNT 134
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB. GR.	
01	04		
23	07		
		Head-Up Display, HUD, Symbology, Instruments, Flight Control, Display Standardization	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) A design guide for Head-Up Displays (HUDs) has been prepared to assist the HUD engineer by providing in one source a list of design criteria for HUDs. The criteria are based on a review of existing HUD specifications and HUD research.			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED ☒ SAME AS RPT ☐ DTIC USERS ☐		21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL William Augustine		22b. TELEPHONE NUMBER (Include Area Code) (513) 255-8272	22c. OFFICE SYMBOL AFWAL/FIGRB

Summary

A design guide for head-up displays (HUDs) has been prepared to assist the HUD engineer by providing in one source a list of design criteria for HUDs. The criteria are based on a review of existing HUD specifications and HUD research.

Acknowledgement

This design guide was prepared as part of a program to develop new criteria for HUDs. This program had five tasks. Task A was a flight test effort to develop dynamic response criteria for HUD control laws using a variable stability NT-33 aircraft. Task B was a flight test program to determine the accuracy requirements for HUD gyro platforms. Task B was carried out simultaneously with task A. Task C was a simulation study designed to improve symbology for unusual attitude recognition and recovery. Task D was the preparation of this design guide. Task E was a review of HUD safety.

This work was performed under contract F33615-85-C-3602 and sponsored by the Flight Dynamics Laboratory, Aeronautical Systems Division (AFSC), United States Air Force, Wright-Patterson AFB. Mr. William Augustine served as Government Project Engineer.



Accession For	
NTIS CRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Form 14-3

Contents :

Summary	ii
Acknowledgement	ii
Contents	iii
List of Figures	v
List of Tables	v
I. PURPOSE AND SCOPE	1
A. Purpose	
B. Scope	
C. General	
D. Sources of Recommendations	
II. DEFINITIONS	2
A. General Definitions	
B. Flight Information Definitions	
C. Navigation Information Definitions	
D. Weapons Information Definitions	
E. Head-Up Display Definitions	
F. Optical Definitions	
G. Systems Definitions	
III. SYSTEM CHARACTERISTICS	14
A. Parts and Materials	
B. Design and Construction	
C. Installation Criteria	
D. Reliability	
E. Documentation	
IV. OPERATIONAL SYSTEM CRITERIA	20
A. Field-of-View	
B. Optical Quality	
C. Sensor Requirements	

Contents (continued)

V. DISPLAY CRITERIA	26
A. General	
B. Compatibility with Head-Down Displays	
C. Amount of Symbology	
D. Basic HUD Information	
E. Fault Alerts	
F. Scaling	
G. Reference	
F. Symbol Priority	
VI. SYMBOLOGY CRITERIA	32
A. General	
B. Accuracy	
C. Dynamic Response	
D. Fly-to-Sense	
E. Pitch Scaling Considerations	
F. Coding	
G. Directed Decision Cues	
H. Size and Shape of Symbols	
I. Size and Shape of Characters	
J. Line Width	
K. Minimum Movement	
L. Video Display Criteria	
VII. PRIMARY FLIGHT REFERENCE CRITERIA	36
A. General	
B. Data Requirements	
C. Equivalence with Head-Down Displays	
D. HUD Symbology for a Primary Flight Reference	
E. Primary Flight Display Reliability	
F. HUD Mode Switching for a Primary Flight Reference	
G. Inertial vs. Air Mass Data	

APPENDICES

A. RECOMMENDED SYMBOLS	A1
B. RECOMMENDED DATA FOR DIFFERENT HUD MODES	B1
C. ABBREVIATIONS	C1
D. REFERENCES	D1
E. HUD BIBLIOGRAPHY	E1

List of Figures

Figure 1	ALPHA and BETA Using Air Mass	
	Velocity Vector	41
2	ALPHA and BETA Using Inertial	
	Velocity Vector	41
A-1	Alternate Airspeed Symbol	A-1
A-4	Interim Angle-of-Sideslip (BETA)	
	Symbol	A-2
A-5	Arrow on Velocity Vector	A-3
A-7	Flight Path Angle Symbol	A-3
A-8	Ghost Velocity Vector Symbol	A-4
A-12A	Pitch Ladder Below Horizon	A-6
A-12B	Pitch Ladder Indication at Zenith	A-6
A-12C	Pitch Ladder Indication at Nadir	A-6
A-13	Potential Flight Path Symbol	A-7
A-15	Velocity Vector (Air Mass) Symbol	A-7
A-18A	Runway Symbol (Inertial Velocity Vector)	A-8
A-18B	Runway Symbol (Air Mass Velocity Vector)	A-8
A-19	Steering Box (Deviation) Symbol	A-9
B-1	Basic Mode	B-5
B-2	Basic Mode -- Unusual Attitude Recovery	B-6
B-3	Basic Mode -- Unusual Attitude Recovery	B-7
B-4	Takeoff/Go-Around Mode	B-8
B-5	Cruise Mode	B-9
B-6	Approach/Landing Mode	B-10
B-7	Approach/Landing Mode With Runway Symbol ...	B-11
B-8	Approach/Landing Mode With Runway Symbol ...	B-12
B-9	Terrain Following Mode	B-13

List of Tables

Table 1	Typical Data Requirements for a	
	Primary Flight Reference HUD	37

-1-
DESIGN GUIDE FOR HEAD-UP DISPLAYS (HUDs)
FOR FIXED-WING AIRCRAFT

I. PURPOSE AND SCOPE

A. PURPOSE

This document presents recommendations for the general design and performance for fixed-wing aircraft head-up displays (HUDs).

B. SCOPE

These recommendations are applicable to HUD systems which display flight information in virtual images in the pilot's forward field of view. They do not address devices for peripheral vision or helmet mounted displays worn by the pilot.

HUD systems considered will include those displays used for routine flying maneuvers, for all-weather instrument landing, for weapons delivery, and for other specialized uses. This HUD design guide is intended for all fixed-wing aircraft, tactical, transport, and specialized mission aircraft. Where appropriate, recommended values will be shown for each type of aircraft.

C. GENERAL

HUD systems are intended to provide the pilot with a display to enable him to view real world cues in conjunction with on board flight information. This combination of real world cues and artificial cues requires displays which are collimated at infinity and have an adequate field-of-view (FOV) for the intended operation. These displays will be used for aircraft control, hence it is essential that the symbols shown on the HUD be appropriate for flying the aircraft and be compatible with the real world cues. While the discussions refer to pilots and imply the use of HUDs for flight guidance and control, most of the recommendations apply to HUDs used by other crew members.

D. SOURCES OF RECOMMENDATIONS

These recommendations are based on characteristics of HUDs found in the past to have desirable characteristics based on pilot opinion. They are also based on HUD research where germane to the issues.

II. DEFINITIONS

A. GENERAL DEFINITIONS

1. **HEAD-UP DISPLAY (HUD):** The HUD is a display which projects collimated symbol imagery into the pilot's forward field of view. The technique results in the combination of flight control information possibly combined with weapon delivery cues and external visual cues from the scene normally viewed through the windshield. Several modes may be available. Video formats may also be displayed, such as low level light television, forward looking infrared (FLIR), or radar signals along with the symbology.
2. **QUANTITATIVE INFORMATION:** Quantitative information is information presented by a display in a manner which permits the display user to observe or extract a numerical value associated with the information.
3. **QUALITATIVE INFORMATION:** Qualitative information is information presented by a display in a manner which permits the display user to assess the status of the information or to control some parameter without requiring attention to a numerical value.
4. **ANALOG INFORMATION:** Analog information is information presented by a display in a manner which shows the value as a continuous movement of a symbol.
5. **ALPHANUMERIC INFORMATION:** Alphanumeric information is information presented by a display as letters and numbers.
 - a. **DIGITAL INFORMATION:** Digital information is quantitative information presented by a display as numerical digits.
6. **COMMAND INFORMATION:** Command information is information presented by a display in a manner which directs a control action.
7. **ERROR INFORMATION:** Error information is information presented by a display in a manner which permits the display user to assess the deviation of some parameter from its desired value without requiring attention to a numerical value.
8. **DISCRETE INFORMATION:** Discrete information is information presented by a display which can only have a small number of possible values.
9. **PREDICTIVE INFORMATION:** Predictive information is information presented by a display which predicts future status, condition or position of the aircraft, an aircraft system, or a subsystem.

10. STATUS INFORMATION: Status information is information dealing with the current condition of the aircraft, an aircraft system, subsystem, or the aircraft surroundings.
11. WARNING INFORMATION: Warning information is information presented by a display which is intended to call the pilot's attention to abnormal or emergency conditions.
12. CONFORMAL DISPLAY: A conformal display is one in which the symbols, when viewed through the HUD, appear to overlies the objects they represent.
13. CONTACT ANALOG: A contact analog display is a conformal display which is a presentation of the real world.
14. SCALE COMPRESSION: Scale compression refers to a display where an angle within the display corresponds to a greater angle in the real world.
 - a. PITCH SCALE COMPRESSION: Pitch scale compression refers to a display in which the pitch and heading angles are compressed, but roll angles are not. Such a display can not be conformal.
15. DIRECTED DECISION CUE: A directed decision cue is a specific annunciation directing the pilot to a specific action, such as "SHOOT," "GO-AROUND," or "BREAKAWAY."
16. MODE: A mode is the operational state of the display: A selected group of display format, input selections, and processing algorithms.
17. SYMBOL: A symbol is a representation of information.
18. CODING CHARACTERISTICS: Coding characteristics are readily identifiable attributes associated with a symbol by means of which symbols can be differentiated; i. e. size, shape, color, etc.
19. PRIMARY VISUAL SIGNAL AREA (PVSA): The primary visual signal area (PVSA) is the area of the instrument panel enclosed by 12 inch arc centered on the intersection of the crewmember's vertical centerline plane and the top of the instrument panel (AFSC-DH-2-2).
20. MUST, SHOULD, ETC.: "Must" implies an absolute necessity for compliance. "Should" implies a necessity for compliance unless an operational need for non-compliance can be shown. "Recommended" and "Highly Recommended" imply differing degrees of desirability to comply with requirements which are not mandatory.

B. FLIGHT INFORMATION DEFINITIONS

1. **PITCH REFERENCE FRAME:** One or more symbols which represent fixed angles in space. These symbols are used as references for aircraft pitch and velocity vector symbols.
 - a. **HORIZON LINE:** A reference symbol shown on the HUD which represents zero pitch (the local horizontal) or the location of the real world horizon.
 - b. **PITCH LADDER:** A set of pitch reference symbols showing increments of angles to the horizon.
 - c. **PITCH INDEX:** A symbol on the HUD positioned at a predetermined pitch angle used to represent a desired velocity vector, flight path angle, or a desired pitch attitude.
2. **FIXED AIRCRAFT REFERENCE (THETA):** The fixed aircraft reference symbol which represents an extension of the fuselage reference line (FRL) or other longitudinal aircraft reference line (ACRL). The symbol indicates relative pitch and roll angles of the aircraft when compared to the horizon (either artificial or real world) or to a displayed pitch ladder. It is sometimes called the waterline.
3. **VELOCITY VECTOR (GAMMA):** The velocity vector is the linear projection of the aircraft velocity originating at the aircraft center-of-gravity or some other well-defined location on the aircraft. (The use of a location forward of the aircraft center-of-gravity is often used to provide pitch rate quickening to the velocity vector symbol.) Some HUD systems refer to the velocity vector as the flight path marker.
 - a. **AIR MASS VELOCITY VECTOR:** The air velocity vector is the linear projection of the aircraft velocity through the air mass. The inverse of this vector is the relative wind.
 - b. **INERTIAL VELOCITY VECTOR:** The inertial velocity vector is the linear projection of the aircraft velocity relative to the ground. It is sometimes called the ground-referenced velocity vector.
 - c. **FLIGHT PATH ANGLE:** The velocity vector component projected on the plane defined by the aircraft FRL (or ACRL) and the aircraft vertical axis. It is the velocity vector constrained laterally.
 - i **AIR MASS FLIGHT PATH ANGLE:** The flight path angle defined using the air mass velocity vector.
 - ii **INERTIAL FLIGHT PATH ANGLE:** The flight path angle defined using the inertial velocity vector.

- iii GHOST VELOCITY VECTOR: For those HUDs which allow the pilot to select either velocity vector or flight path angle (i. e. to "cage" the velocity vector), the ghost velocity vector shows the location of the velocity vector when flight path angle is selected.
- 4. POTENTIAL FLIGHT PATH (PFP): A cue, normally calculated from longitudinal aircraft acceleration which shows the velocity vector achievable for the aircraft by balancing existing thrust and drag.
- 5. ANGLE OF ATTACK (ALPHA): The angle of attack is the angle between an aircraft longitudinal reference (FRL or ACRL) and the air velocity vector projected on the plane defined by the aircraft longitudinal reference (FRL or ACRL) and the aircraft vertical axis.
- 6. AIRSPEED: The magnitude of the speed with which the aircraft moves through the air.
 - a. INDICATED AIRSPEED (IAS): Indicated airspeed is the speed calculated from the dynamic pressure of the impact air pressure from the pitot-static system. IAS is uncorrected for position error.
 - b. CALIBRATED AIRSPEED (CAS): Calibrated airspeed is IAS corrected for pitot-static system position error.
 - c. TRUE AIRSPEED (TAS): True airspeed is the actual aircraft speed through the air mass.
 - d. MACH NUMBER: The Mach number is the ratio of the TAS to the ambient speed of sound.
- 7. ALTITUDE: Altitude is the height of the aircraft above sea level or some other reference.
 - a. BAROMETRIC ALTITUDE: Barometric altitude is the altitude calculated from measuring the ambient static pressure through the pitot-static system.
 - b. RADAR ALTITUDE: Radar altitude is the altitude above the terrain measured from the time for a radar signal to return. It is sometimes called radio altitude.
- 8. VERTICAL VELOCITY: Vertical velocity is the rate of ascent or descent, usually calculated from the rate of change of barometric altitude. It is sometimes called vertical speed in civilian operations.
- 9. HEADING: The horizontal angle made by the longitudinal reference (FRL or ACRL) with a reference direction.

- a. **MAGNETIC HEADING:** The horizontal angle made with magnetic north.
 - b. **TRUE HEADING:** The horizontal angle made with true north.
 - c. **GRID HEADING:** The horizontal angle made with grid north.
10. **BANK:** The angle between local vertical and the plane defined by the aircraft's vertical and longitudinal axes.
11. **ANGLE OF SIDESLIP (BETA):** The angle of sideslip is the angle between the aircraft longitudinal reference (FRL or ACRL) and the air velocity vector projected on the plane defined by the aircraft longitudinal reference and the aircraft lateral axis. BETA is the left-right equivalent of ALPHA.
12. **NORMAL LOAD FACTOR:** Normal load factor is the ratio of the lift to the aircraft weight.

C. NAVIGATION INFORMATION DEFINITIONS

1. **DEVIATION:** An indication of aircraft displacement (left-right, up-down) from a desired track.
- a. **COURSE DEVIATION:** An indication of aircraft displacement (left-right) from a desired track (VOR or TACAN radial, ILS or MLS localizer, INS track, etc.).
 - i. **ROLLOUT GUIDANCE:** An indication of aircraft displacement (left-right) from the runway centerline used for instrument takeoffs and low visibility landings.
 - b. **VERTICAL DEVIATION:** An indication of aircraft displacement (up-down) from a desired track (ILS or MLS glide-slope, target altitude, etc.).
 - c. **STEERING BOX:** An indication of aircraft displacement (left-right, up-down, or both) from a desired track. Normally shown as a box or circle, the steering box shows the displacement compared to a maximum or nominal displacement (such as the ILS Category II limits).
2. **FLIGHT DIRECTOR:** Flight director information is single, dual, or multiple axis steering command information which, when followed, will place the aircraft on a trajectory to intercept and maintain a preselected computed path through space.
- a. **LATERAL STEERING COMMAND:** A single axis steering command which, when followed, will place the aircraft on a trajectory to intercept and maintain a preselected computed ground track.

- i. ROLLOUT STEERING COMMAND: A lateral steering command which, when followed during the take-off or landing ground roll, will place the aircraft on a trajectory to intercept and maintain the runway centerline.
 - b. VERTICAL STEERING COMMAND: A single axis steering command which, when followed, will place the aircraft on a trajectory to intercept and maintain a preselected vertical flight path (ILS or MLS glideslope, target altitude, etc.).
 - c. COMBINED STEERING COMMAND: A multiple axis steering command which, when followed, will place the aircraft on a trajectory to intercept and maintain a preselected computed path through space.
 - d. SPEED COMMAND: A steering command which, when followed, will cause the aircraft to maintain a desired airspeed.
3. WAYPOINT: A symbol depicting the location of a particular ground point.
- a. RUNWAY SYMBOL: A symbol depicting the location of the runway.
4. DIRECTION CUE: A symbol depicting the location of a particular line of position (LOP). LOPs include VOR or TACAN radials, runway centerline extensions, INS track, etc.
5. RANGE: A symbol showing the distance (usually in nautical miles) to a specified waypoint, ground location, or target.
- a. DME: A symbol showing the distance in nautical miles to a TACAN or DME navigation station.
 - b. RUNWAY DISTANCE REMAINING: A symbol showing the distance in feet (or meters) to the end of the runway.
6. TIME TO GO: A symbol showing the time to a preselected waypoint, ground location, or target.
7. FLARE CUE: A symbol indicating the desired vertical flight path during the landing flare. The flare cue is usually a vertical steering command.
- D. WEAPONS INFORMATION DEFINITIONS
1. AIMING RETICLE: A symbol used as a weapon aiming cue.
- a. STANDBY RETICLE: A symbol used as a manual weapon aiming cue. The standby reticle is a backup display intended for use in the event of HUD or other system failure.

2. BOMBFALL LINE: A symbol indicating the approximate trajectory of a weapon following release.
3. BREAKAWAY SYMBOL: A symbol displayed at minimum weapon release range and/or reaching the minimum safe pullout altitude during air-to-ground weapon delivery. It indicates the need for an immediate pullup of the aircraft.
4. CONTINUOUSLY COMPUTED IMPACT LINE (CCIL): A symbol used to display the locus of bullet impact points, usually with bullet time-of-flight points indicated.
5. CONTINUOUSLY COMPUTED IMPACT POINT (CCIP): A symbol indicating the predicted impact point of a weapon.
6. PULLUP CUE: A symbol used to indicate an approaching pullup requirement during air-to-ground weapon delivery.
7. SENSOR SEARCH AREA: A symbol showing the areas of weapon sensor (radar, FLIR, etc.) coverage.
8. SOLUTION CUE: A symbol indicating a release solution for a computed weapon delivery.
9. TARGET INFORMATION:
 - a. TARGET DESIGNATOR: A symbol showing the location of the target.
 - b. TARGET RANGE: A symbol showing the range to the target.
 - c. TARGET RANGE RATE: A symbol showing the rate of change of the target range.
 - d. TARGET ASPECT: A symbol indicating the orientation of the target vehicle (aircraft, ship, or ground vehicle).
10. WEAPON BORESIGHT: A symbol indicating the weapon boresight axis.

E: HEAD-UP DISPLAY DEFINITIONS

1. PILOT DISPLAY UNIT (PDU): The assembly which consists of the image source, the collimator, and the combiner.
 - a. IMAGE SOURCE: The component which provides the optical origin of the symbology, such as a cathode ray tube (CRT) screen, laser source, etc.
 - b. COMBINER: A component located in the pilot's forward field of view which provides superposition of the symbology on the external field of view.

- i FIXED COMBINER: A combiner fixed in the pilot's view.
 - ii STOWABLE COMBINER: A combiner that can be deployed for use or retracted out of view.
 - iii WINDSHIELD COMBINER: An area of the windshield which functions as the combiner.
 - iv MONOCULAR COMBINER: A combiner intended to be viewed with one eye.
- c. COLLIMATOR: The optical components used to collimate the display image. (Note: The combiner often contributes to the collimation.)
- i REFRACTIVE COLLIMATOR: A collimator using only lenses for collimation, i. e. using the principle of refraction. These are sometimes referred to as "conventional" collimators.
 - ii REFLECTIVE COLLIMATOR: A collimator using mirrors (perhaps in conjunction with lenses) for collimation (and often for superposition as well), i. e. using the principle of reflection. These are sometimes referred to as "conventional" collimators.
 - iii DIFFRACTION COLLIMATOR: A collimator using one or more diffraction gratings for collimation (and often for superposition as well). Since the diffraction gratings are usually produced using holograms, these are sometimes referred to as "holographic" collimators.
2. ELECTRONIC UNIT (EU): The assembly which consists of the signal processor, the symbol generator, and the display electronics. These may be combined into fewer physical units or they may be merged with other systems.
- a. SIGNAL PROCESSOR: The electronic unit which performs any calculations, filtering, etc. of the raw data to generate parameters to be displayed. An example, would be the calculation of inertial velocity vector from the raw data of three velocities from the inertial platform.
 - b. SYMBOL GENERATOR: The electronic unit which generates the actual symbols to be displayed on the HUD.
 - c. DISPLAY ELECTRONICS: The electronic unit which produces the visible image of the symbols and which monitors the symbols.

3. DISPLAY CONTROL PANEL (DCP): The assembly which houses the HUD controls, such as brightness, mode selection, etc.

F. OPTICAL DEFINITIONS

1. CONTRAST RATIO: The ratio of display symbology brightness to the external visual cue brightness. Contrast ratio must specify the ambient brightness level.
2. DISPLACEMENT ERROR: The difference in apparent position of a real world visual cue caused by optical effects (such as refraction) when viewed through the combiner.
3. DISTORTION: Variation in apparent geometry of real world objects when viewed through the combiner.
4. EXIT APERTURE: The area of the optical display at the exit of the collimator.
5. EYEBOX: A three dimensional envelope from which the HUD symbology may be viewed.
6. EYE REFERENCE POSITION (ERP): The location of the pilot's eye used to calculate fields of view and to make other comparisons between HUDs.
 - a. DESIGN EYE REFERENCE POSITION (DERP): The location of the pilot's eye used in the design of the HUD.
 - b. ALERT EYE POSITION (AERP): The location of the pilot's eye when he is looking for critical external visual cues. It is usually assumed to be somewhat forward of the DERP.
7. FIELD-OF-VIEW (FOV): The spatial angle in which the symbology can be displayed measured laterally and vertically.
 - a. INSTANTANEOUS FIELD-OF-VIEW (IFOV): The spatial angle in which the symbology is visible from a single eye position. It is the spatial angle of the collimator exit aperture as seen from the eye.
 - i MONOCULAR IFOV: The spatial angle in which the symbology is visible viewed from a single eye (left eye, right eye, or single ERP) position.
 - ii OVERLAPPING BINOCULAR (AMBINOCULAR) IFOV: The envelope of both left and right eye monocular IFOVs. This is the field-of-view visible to either eye. Called ambinocular IFOV by some authorities and binocular IFOV by others. The use of the adjective "overlapping" is recommended.

- iii SIMULTANEOUS BINOCULAR IFOV: The envelope within the overlapping binocular IFOV which is common to both left and right eye monocular IFOVs. The FOV in which the symbology is visible to both eyes simultaneously. Called binocular IFOV by some authorities. The use of the adjective "simultaneous" is recommended.
 - b. TOTAL FIELD-OF-VIEW (TFOV): The spatial angle in which the symbology can be viewed from within the total viewing cone or wedge. The area covered by the IFOV may not be the entire display. By moving his head, the pilot may be able to see more symbology. The TFOV represents the total symbology available by moving the ERP.
 - c. KNOTHOLE EFFECT: The apparent limitation of the TFOV by the exit aperture sometimes leads to the expression "knothole effect." This is an analogy of the TFOV which is the world beyond the "knothole" and the IFOV is the "knothole." By shifting one's eye, the view of the real world beyond the "knothole" can be viewed, even though not all at once.
- 8. LINE WIDTH: The width at 50 percent of peak luminance of the line luminance distribution
 - 9. TRANSMITTANCE OF COMBINER: The percent of ambient light from an external source passing through the combiner. The wavelength spectrum of the light from the external source must be specified. Normally, the spectrum of sunlight is assumed.
 - 10. VISUAL DISPARITY: The difference in apparent position of an image as presented to each eye. Sometimes referred to as "binocular" disparity. Disparity can be divided into vertical and horizontal components. The horizontal component can be described as convergent or divergent. These terms describe the view from the eye, i. e. convergent disparity means the optical rays appear to the pilot to emanate from a point nearer than optical infinity. Divergent disparity means that the rays appear to emanate from a point further than optical infinity.
- G. SYSTEMS DEFINITIONS
- 1. CERTIFICATION AUTHORITY (CA): The agency (or its delegate) with the authority to determine airworthiness of the system. In the case of civil aircraft, this agency is the Federal Aviation Administration (FAA) or its foreign equivalent. In the case of public or military aircraft, this agency is the appropriate government or military organization. The CA will be responsible for minimum or maximum acceptable values for many of the HUD system specifications.

2. **USER ORGANIZATION (UO):** The organization responsible for issuing the final HUD system specification and which will be the ultimate user of the equipment. For civil aircraft, this will normally be the operator of the aircraft. In the case of military or public aircraft, it is the appropriate organization which will fly the aircraft. The UO will have the final decision on specifications based on the recommendations contained in this document, subject to the airworthiness requirements set by the CA. Note: For military and public aircraft, the CA and the UO may be the same organization.
3. **PRIMARY FLIGHT REFERENCE (PFR):** A display which displays information sufficient to maneuver the aircraft about all three axes and accomplish a mission segment (such as takeoff or instrument approach). The amount of data displayed obviously depends on the mission segment to be performed. As a guide, the data displayed in the basic "T," i. e. airspeed, pitch attitude, altitude, heading, and lateral deviation (or their substitutes) should be displayed in a primary flight reference. Other data which is critical for immediate use, such as glideslope deviation during a precision instrument approach, should be included for those mission segments where it is required. A PFR must have at least the reliability specified by the CA.
4. **RELIABILITY TERMS:** The definitions of some reliability terms, such as "extremely improbable," etc., will be specified by the certification authority.
 - a. **EXTREMELY IMPROBABLE:** For civil aircraft, extremely improbable means less than once per billion hours (FAA-AC-25.1309-1). For military aircraft, extremely improbable means that the probability of occurrence cannot be distinguished from zero and that it is so unlikely that it can be assumed that this hazard will not be experienced in the entire fleet (MIL-STD-882C).
 - b. **FAIL-PASSIVE:** A flight control system is "fail-passive" if a single failure will cause a system disconnect leaving the airplane in trim with no control hardover (FAA-AC-120-28A).
 - c. **FAIL-OPERATIONAL:** A flight control system is "fail-operational" if a single failure will allow the system to continue operation with no loss in performance (FAA-AC-120-28A).
5. **TYPES OF AIRCRAFT**
 - a. **CIVIL AIRCRAFT:** An aircraft not operated by a governmental body.
 - b. **PUBLIC AIRCRAFT:** An aircraft operated by a governmental body including a military organization.

- c. **TACTICAL AIRCRAFT:** An aircraft defined as Class IV in MIL-F-8785C. Tactical aircraft will also include primary and basic training aircraft for the purposes of this document.
- d. **TRANSPORT AIRCRAFT:** An aircraft defined as Class III in MIL-F-8785C.

III. SYSTEM CHARACTERISTICS

A. PARTS AND MATERIALS

The materials and processes used in the construction of the HUD system should conform to accepted aeronautical practices. Limited life parts, except for CRTs, should be avoided.

B. DESIGN AND CONSTRUCTION

1. WEIGHT: The weight of HUD components should be kept to the minimum commensurate with design objectives. Handles or grasp surfaces should be provided on all line replaceable units (LRUs) that are heavy or that are difficult to grasp, remove, or carry.
2. CABLING AND CONNECTIONS: The wiring connections of the HUD system should conform to MIL-W-5088H or other appropriate civil cabling standards. Connectors should be provided with a positive index to prevent misconnection.

All HUD systems must be provided with a wiring interface diagram defining the system inputs, outputs, and power supply requirements.

3. INTERCHANGEABILITY: All HUD parts having the same part number should be interchangeable with each other with respect to installation and performance. Software interchangeability should conform to the requirements of DOD-STD-2167 or RTCA-DO-178.
4. ELECTROMAGNETIC INTERFERENCE (EMI): The HUD system is essentially no different with respect to EMI than any other electronic system. The HUD should not be susceptible to interference from other aircraft systems, considering both interference of signal sources to the HUD and disturbances to the aircraft power system. The HUD in turn must not be a source of EMI to other critical aircraft systems.

Since the HUD will interface with many other aircraft systems as signal sources, it should be demonstrated that these interfaces have no deleterious effects on those systems or their outputs.

5. **MAINTAINABILITY:** The HUD system should be designed for maintainability. The design of the equipment should provide for easy access to internal parts, terminals, and wiring. All modules, connectors, adjustment or alignment controls, and test points should be marked or identified. The design should be such that it is impossible to incorrectly install a module in the unit. All alignment or adjustment controls should be accessible with a minimum of need to remove the system or assembly from the aircraft. Scheduled maintenance should be limited to periodic cleaning of exposed optical surfaces, replacement of a CRT, or servicing of optical desiccant material.
6. **NOMENCLATURE, NAMEPLATES, AND IDENTIFICATION MARKINGS:** Nomenclature, serial number assignment, and identification marking should conform to MIL-N-7513, MIL-P-15024, FAA-AC-21.303-1A, or other appropriate military or civil standard.
7. **ENVIRONMENTAL CONDITIONS:** The HUD system should be designed to the environmental conditions specified in RTCA-DO-160A or MIL-E-5400. Relaxation of performance standards is often allowed during initial warm-up at very cold temperatures or during the firing of aircraft guns.
8. **INPUT ELECTRICAL POWER:** HUD systems must normally operate on 400 Hz, 115 V AC and 28 V DC power or as specified by the UO. The power supplied should conform to MIL-STD-704D. The power required should not exceed the amount specified by the UO. The standby reticle, if installed, should have a power supply independent from the other HUD power supply.
9. **HUMAN ENGINEERING:** The HUD system should be designed and developed with the objectives of enhancing the man-machine interface. MIL-STD-1472 provides criteria for the application of human engineering principles and procedures.
10. **SOFTWARE ENGINEERING:** The HUD system software should be developed in accordance with the criteria of DOD-STD-2167 or RTCA-DO-178.
11. **COOLING REQUIREMENTS:** The HUD cooling requirements must be specified for each aircraft installation. Cooling failure should not cause HUD loss. Overheating of the HUD system should be annunciated to the crew.
12. **WARM-UP TIME:** The HUD equipment should be functionally operational and conform to all accuracy and performance requirements within two minutes of being switched on at any condition within the environmental envelope specified. Power transients of up to ten seconds should not require re-warm-up for periods longer than the power loss.

C. INSTALLATION CRITERIA

1. **PDU MOUNTING:** Mounting of the PDU or PDU components must be such that the display accuracy and readability is not degraded by the environmental conditions normally expected in flight.

- a. **MOUNTING:** The mounting of the PDU or PDU components should be designed to withstand the vibration, turbulence, maneuvering, and pressurization loads expected in service. The PDU mounting should provide for both lateral optical and vertical optical adjustments.

The PDU should make the least practicable interference with mounting the primary head-down flight instrument in the PVSA. As a design goal, the PDU should not interfere with mounting the primary head-down flight instrument in the PVSA.

- b. **REPLACEMENT:** Replacement of the PDU should not require optical adjustment.
- c. **STOWABILITY:** If a stowable combiner is used, it should be easily stowed by the pilot with his restraint system fastened (shoulder harness locked). There must be a positive means to ensure that the combiner is fully deployed before symbols are displayed.
- d. **HAZARDS:** The PDU must not introduce hazards of high voltage, radiation, or blinding during use.
- e. **EGRESS:** The PDU must not interfere with crew escape, including bailout or ejection seat use, if appropriate. Minor infringement on the ejection plane (defined in MIL-STD-1333A) may be tolerated if this infringement is confined to the central portion of the panel and does not create an unacceptable risk to pilots during ejection.
- f. **CRASHWORTHINESS:** Protruding parts of the PDU should incorporate impact protection for the crew, such as the use of fold-away or break-away structures or padded structures.
- g. **EXTERNAL LIGHT:** HUDs designed for use in combat aircraft (including transports) should not be visible from outside the aircraft during night operations.
- h. **COMBINER WINDLOADS:** For aircraft in which the front part of the canopy is removed prior to ejection, the combining glass and its mounting structure must withstand without breakage the wind loading and temperature differential associated with the sudden removal of the canopy in flight. This requirement is imposed to avoid injuries to the pilot from combiner debris during an ejection.

- i. BIRD STRIKE: The design of the combiner should consider canopy or windshield deflection during a birdstrike. If the canopy or windshield could contact the combiner during a birdstrike, the combiner and its mounting should be designed to prevent large, sharp, or high velocity fragments from injuring the pilot when the combiner is struck along its upper edge.
- j. RECORDING CAPABILITY: The PDU should be designed with the ability to install a camera to record the visual scene through the combiner and the HUD symbology.

2. HUD CONTROLS

a. SPECIFIC CONTROLS

- i HUD ON/OFF SWITCH: The HUD must incorporate an on/off switch to completely remove power from the unit (except power to the standby reticle, if installed). This switch can be included with the brightness control provided a suitable detent is used. If a stowable combiner is used, the on/off switch may be incorporated with the stowing/unstowing of the combiner.
- ii BRIGHTNESS: The HUD must have a manual brightness control, an automatic brightness control (if specified by the user), and a manual standby reticle brightness control (if a standby reticle is installed).
 - (a) MANUAL BRIGHTNESS: The manual brightness control should continuously vary the intensity of all symbols from zero to full intensity.
 - (b) AUTOMATIC BRIGHTNESS: With automatic brightness on, the brightness control should track the ambient light level to maintain a constant contrast ratio. For an increase in ambient brightness as detected by the light sensor, there will be an associated increase in display intensity to maintain a constant contrast ratio.
 - (c) STANDBY RETICLE BRIGHTNESS: The standby reticle brightness control should continuously vary the standby reticle intensity from zero to full intensity. It should incorporate a detent to remove power from the standby reticle. A separate power supply should be used for the standby reticle.

- iii DECLUTTER SWITCH: A means of selectively removing symbols from the display should be provided.
 - iv MODE SELECTION: If automatic mode switching is incorporated, it is highly recommended that a manual mode selection switch be available to allow the pilot to over-ride the automatic selection.
 - v TEST SWITCH: A test switch should be provided to allow the crew to initiate self-testing of the HUD. This may be omitted if an automatic test function is applied with initial power-up.
- b. RELATION TO HEAD DOWN INSTRUMENTS: Controls related to display parameters should, whenever possible, be combined with those of the head-down instruments.

3. ELECTRICAL TRANSIENTS

- a. ELECTRICAL OVERLOAD: The HUD system must contain overload protection devices for all internal power supplies. These devices should automatically reset when the overload condition no longer exists.
- b. POWER INTERRUPTIONS: The HUD should be designed to provide for monitoring of and proper response to interruptions of the primary electrical power. For isolated short term power interrupts, the HUD should go blank for the duration of the interrupt and restore the display following reapplication of power.
- c. UNDERVOLTAGE PROTECTION: The HUD system should not be damaged by voltages below those specified in Section III B 8 and should automatically resume normal operation when the undervoltage condition no longer exists.

D. RELIABILITY

The HUD system should be designed to achieve the highest practical level of reliability. Design reliability should be determined using the methods and data of MIL-HDBK-217D.

- 1. PRIMARY FLIGHT REFERENCE: The system reliability for HUDs intended to be used as primary flight references during flight in instrument meteorological conditions (IMC) must be at least that of the head down instruments. The system must be designed such that the displaying of incorrect attitude information is extremely improbable.
- 2. INSTRUMENT LANDING: The system reliability for HUDs intended to be used as primary flight references during instrument approaches and landing will generally be much higher than for

other HUDs. The overall system reliability will be specified by the UO or CA. Considerations should be given to incorporating fail-passive or fail-operational designs. The system must be designed so that the displaying of incorrect attitude or guidance data is extremely improbable.

3. NON-PRIMARY FLIGHT REFERENCE: The system MTBFs for HUDs not intended to be used as primary flight references in IMC should be specified by the UO.

E. DOCUMENTATION

The HUD system design should be documented by:

1. Design drawings, schematics, wiring diagrams (including interfaces. see III. B. 2.), and parts lists;
2. Detail specifications;
3. Test procedures defining methods of verifying and evaluating characteristics and performance;
4. Environmental test reports documenting design performance over the full range of applicable environments;
5. Analyses verifying reliability, maintainability, and safety; and
6. Software documentation described in DOD-STD-2167 or in RTCA-DO-178.

IV. OPERATIONAL SYSTEM CRITERIA

A. FIELD-OF-VIEW

The HUD should be designed and installed to meet all operational requirements for the specific application. In particular, the system should be designed to permit the pilot to look in normally expected directions with minimal loss of symbology. The FOV should be centered on the centerline of the pilot.

The pilot should not have to move his head to view the symbology. In other words, the IFOV should include the major flight data symbols in the HUD under normal viewing conditions. Head motion has a tendency to cause or exacerbate spatial disorientation or vertigo and the HUD must be designed to minimize this.

If the displayed flight information includes conformal ground reference symbols, such as a runway or target symbol, the lateral FOV should be sufficient to permit conformal viewing of the symbols during all anticipated crosswinds. Runway symbols should be conformal during crosswind approaches at the maximum approved landing crosswind. The lack of adequate lateral FOV has been identified as a major limitation during crosswind landings.

The FOV should be specified for each installation. Suggested minimum values of overlapping binocular IFOV are

Tactical aircraft:	17 deg vertical 20 deg lateral
--------------------	-----------------------------------

Transport aircraft:	12 deg vertical 22 deg lateral
---------------------	-----------------------------------

Suggested minimum values for TFOV are

Tactical aircraft	25 deg vertical 25 deg lateral
-------------------	-----------------------------------

Transport aircraft	12 deg vertical 22 deg lateral
--------------------	-----------------------------------

B. OPTICAL QUALITY

1. **BRIGHTNESS:** The brightness control should provide a suitable contrast between symbols and external visual cues over the range of ambient lighting conditions expected in service. In the past, problems have been encountered during night operations where the HUD intensity could not be set low enough to provide a comfortable display against a dark background. At the same time, HUDs intended to be used to track aerial targets (such as air-to-air weapons targeting) should ensure that the symbols can be easily seen against bright clouds.

Unless specially enhanced, all symbols should be equally bright. This does not preclude allowing different symbols' brightness to be controlled independently. Aircraft master warning or other critical warning messages should appear fully bright when they first are shown in the HUD FOV, regardless of the brightness setting. Dimming or canceling these messages in the HUD FOV should require some pilot action.

When set for manual operation, the HUD brightness should be adjustable from zero to full intensity. In automatic, the HUD brightness should track the ambient light level to maintain a constant (pilot selectable) contrast ratio. When in automatic brightness, the HUD brightness should track the background brightness with sufficient speed to avoid large variations in contrast ratio. The pilot should have the capability to select manual brightness (i. e., A manual brightness control is required; an automatic brightness control is optional.)

- a. DAYTIME BRIGHTNESS: A recommended daytime background brightness is 10,000 FL (sunlit snow).
 - b. NIGHTTIME BRIGHTNESS: The minimum controllable brightness should provide smooth control of HUD intensity at very low ambient light levels (less than 15 FL). Some HUDs have used a two position manual brightness control with both a day and a night range of settings. This was identified as a problem area in early CRT HUDs.
 - c. BRIGHTNESS VARIATIONS: The brightness of a uniform display should not vary significantly over the FOV.
2. COLOR: Colors should only be used where an improvement over monochrome can be shown. Colors used should be consistent with head-down instruments. Each color used must be assessed for acceptable contrast against all likely background conditions. (These two requirements may conflict, such as the need to use blue to show pitch up which may not be visible against the sky.) Color must not be the only discriminant. In a degraded or monochromatic mode, a color display must remain legible and unambiguous. Color displays should have a means for the pilot to select a monochromatic display.

Colors used in monochromatic HUDs must be specified for each installation. Any color used should be assessed for acceptable contrast against all likely background conditions. The use of a P-43 phosphor has been found in the past to provide acceptable contrast.

A night filter may be used to provide adequate control or acceptable contrast during night operations. Such a filter should only be incorporated if an improvement over an unfiltered display can be demonstrated. Any night filter color specification should be matched with the color specification

for the HUD itself. If night vision goggles (NVGs) are likely to be worn in conjunction with HUD use, then the colors used should also be compatible with the NVGs. Normally, a P-43 phosphor and a narrow bandpass green filter will ensure compliance with this paragraph.

3. COMBINER TRANSMITTANCE: The average transmittance of the combiner to external light should be as high as practical. Minimum values of combiner transmittance should be specified for each installation. A suggested minimum value for combiner transmittance is

Combiner Transmittance: 70%
(based on ambient sunlight,
averaged over all wavelengths)

No credit for part-time use of the HUD should be allowed in specifying combiner transmittance.

The combiner must not color the ambient light to produce misleading color cues of real world objects.

4. COMBINER WORKMANSHIP AND CONSTRUCTION: The combiner shall be free from defects which will affect the appearance of the glass or which may affect its serviceability.

The entire periphery of the edges and the surface should be gray-ground to reduce objectionable highlights (MIL-R-6771B). The combiner edges and mounting can produce "accommodation traps" which may defeat the purpose of collimating the HUD image. For this reason, the combiner mounting should be as unobtrusive as practicable.

5. DISPLACEMENT ERROR: When objects are viewed through the combiner, the combining glass should not cause real world objects to appear to be displaced significantly. Recommended maximum displacement errors are

Within central 12 deg of FOV	0.6 mr
Within 12 to 24 annular FOV	1.2 mr
Beyond 24 deg annular FOV	2.0 mr

6. DISTORTION: The combiner should not discernibly distort real world objects when they are viewed through it.

If the windshield or canopy is a major source of distortion, the the symbol placement may be modified to allow conformal symbols to overlies their real world equivalents when viewed through the canopy.

7. EYEBOX: The eyebox must contain the HUD DERP. Within the eyebox, the optical specifications should be met. The minimum size of the eyebox should be such to allow for reasonable pilot head motion. Recommended minimum dimensions are

Tactical Aircraft:

Longitudinal:	4 in
Lateral:	4 in
Vertical:	from 1 in below DERP to highest practical seating height.

Transport Aircraft:

Longitudinal:	4 in
Lateral:	4 in
Vertical:	2 in

If an AERP is specified, the eyebox must contain the AERP.

There should be a means provided to indicate the proper DERP to the pilot while sitting in his seat. This may be accomplished on the ground prior to flight (i. e., it is not necessary to provide this indication in flight).

Specific consideration should be paid to the typical practice of sitting as high as possible in tactical aircraft to maximize the external view. In these aircraft, the HUD DERP may not be the aircraft DERP used to design the flight instruments (MIL-STD-1333A). The HUD DERP will be specified by the UO.

The HUD DERP for transport aircraft should be the DERP used in the design of the flight instruments (MIL-STD-1333A or SAE-ARP-268F).

8. FATIGUE: The HUD should be designed to minimize personnel fatigue caused by viewing. The pilot should be able to view the HUD while sitting comfortably in his normal sitting position.
9. GLARE: Glare and other unwanted visual signals should be minimized. Stray reflections from cockpit lights, from the sun, moon, or external lights should not interfere with the use of the HUD, with the view of real world objects, or interfere with other crewmembers not using the HUD. (For HUDs intended for use as PFRs, replace "should not" with "must not.")

Multiple reflection combiners should only be installed if necessary since they can be a source of stray reflections. There should be no secondary real world images visible over the entire FOV when viewed from within the eyebox. Solar im-

ages should be held to a maximum intensity of 2.5 percent with 0.5 percent as a design goal.

10. **MULTIPLE IMAGES:** There should be no secondary symbology images visible over the entire FOV when viewed from within the eyebox. (For HUDs intended for use as PFRs, replace "should" with "must.") Care must be taken to avoid unwanted images from the aircraft windshield if the windshield and combiner are in close proximity. An anti-reflective coating should be used on all optical surfaces.
11. **VISUAL DISPARITY:** Binocular disparity has been shown to be a limiting factor in the pilot's adaptation to a HUD. Any disparity should be minimized. If a choice must be made for slight horizontal disparity, a slight convergent disparity (i. e. the symbols appear closer than optical infinity) is preferred over a divergent disparity. The binocular disparity of the displayed symbols must be specified over the TFOV. Normally the binocular disparity is quoted on a 3 sigma basis.

Recommended maximum values are

Horizontal divergence:	0.0 mr
convergence:	2.5 mr
Vertical:	1.0 mr

If the real world cues appear to be closer than optical infinity, because of windshield distortion or because the HUD is intended to be used while viewing nearby cues (such as during refueling operations), the convergence and divergence limits should be adjusted so the virtual image does not appear to be further away than the external cues.

(Note: At this time, there is a minority opinion which disagrees with these maximum values. This opinion suggests that these limits should be increased in the direction of horizontal divergence, i. e. the HUD imagery should appear to be beyond optical infinity.)

C. SENSOR REQUIREMENTS

1. **ACCURACY:** The accuracy of the gyroscopic reference has been a problem with the retrofit of HUDs in the past. Generally, conventional aircraft gyros have not had the required accuracy and have presented problems with mismatch with the HUD symbols and the real world.

The following gyro platform accuracies are recommended:

All aircraft(non-contact analog):

Heading:	1.0 deg
Pitch:	1.0 deg
Roll:	1.0 deg
Pitch zero:	0.5 deg
Roll zero:	0.5 deg

All aircraft (contact analog):

Heading:	0.2 deg
Pitch:	0.5 deg
Roll:	0.5 deg
Pitch zero:	0.2 deg
Roll zero:	0.5 deg

The final judge of gyro platform accuracies is the lack of interference with non-contact analog symbols or the absence of a discernible mismatch with external visual cues for contact analog symbols. The preceding gyro accuracies are presented as a guide.

2. **SENSOR RESPONSE:** The response of sensors input to the HUD can have a significant impact on the HUD characteristics. In general, the two sensors that can cause the most difficulty are the response of the gyro platform and the response of the angle-of-attack (and sideslip) sensors.

- a. **GYRO PLATFORM:** In general, the gyro platform should provide accurate data at a rate approximately four times the response rate of the aircraft. Recommended minimum platform response rates (providing acceptable accuracies) are

Tactical Aircraft:

Pitch:	180 deg/sec
Roll:	400 deg/sec
Heading:	90 deg/sec

Transport Aircraft:

Pitch:	90 deg/sec
Roll:	120 deg/sec
Heading:	30 deg/sec

- b. **ANGLE-OF-ATTACK:** The angle-of-attack sensor should provide a signal without excessive oscillations or noise, but with sufficient response for the HUD symbols on which it is based. No specific recommendations can be made at this time. It is quite likely that angle-of-attack data requirements will differ for a HUD displaying only ALPHA or ALPHA error and for a HUD using angle-of-attack to generate an air mass velocity vector.

V. DISPLAY CRITERIA

A. GENERAL

The HUD may repeat, augment, or replace head-down displays and information for any and all phases of flight. HUD systems that are designed to replace head-down displays should contain the information required by the pilot for manual control during the selected flight phase. It is understood that this information need not be identical in content or format to the head-down information.

B. COMPATIBILITY WITH HEAD-DOWN DISPLAYS

The HUD must display data which is compatible with the head-down instruments. It is important that the control strategies used head-up by the pilot be compatible with those used head-down. This does not mean that the HUD must be constrained to show only that data that is shown head-down. It might not be feasible to display all HUD parameters on a head-down electromechanical instrument. It would not be wise to limit an electronic HUD to only those parameters available head-down.

It does mean that the same pilot will fly the airplane both head-up and head-down. If only pitch information is available head-down, then pitch information must be displayed on the HUD so that in critical flight situations the pilot can use the same information and control strategies. There is a large interaction with pilot training implied by these arguments.

The HUD must be an integrated display -- that is integrated into the cockpit. This means that the same procedures used to fly by reference to the head-up display and those used to fly by reference to the head-down panel must not lead to problems when the pilot switches from one display to the other. For example, the use of longitudinal controls by reference to GAMMA on the HUD should not lead to problems if the pilot mistakenly uses the techniques for flying by reference to THETA on the head-down panel.

C. AMOUNT OF SYMBOLOGY

A cluttered display is one which has an excessive amount of information contained in the number or variety of symbols and spatial relationships. A large fraction of this information may be pertinent to the task at hand, but if the secondary information detracts from the interpretation of the information necessary for the primary task or increases the primary display interpretation error rate, then irrelevant or low priority information must be removed. The designer must guard against the urge to add more and more data to the display.

The pilot must also have a means to reduce the amount of extra, low priority information if it is not desired. There are two primary means to accomplish this: using few HUD modes with declutter options or using many HUD modes with fewer declutter options.

1. DECLUTTER LOGIC: One method is to allow the pilot to manually select from one or more declutter options. In the extreme, this approach would have the pilot select whatever symbols are wanted from a menu.

The simplest form of declutter is a "scales" switch. This removes secondary information so the pilot can concentrate on the symbols of greater importance. Typical installations use this approach to delete airspeed, altitude, vertical velocity,, and heading from the HUD. Because this "all or nothing" approach leaves something to be desired, some modern HUDs have two or more declutter options, removing part of the secondary displays at one position and the rest at another.

It is highly recommended that future HUDs have a minimum of two levels of declutter.

It is also recommended that, while a basic selection of symbols to be displayed be programmed into the HUD controls, the pilot be given the option to modify the programming and select which symbols be included with each level of declutter. This option could be accomplished on the ground prior to flight.

2. MODE LOGIC: The second approach to declutter is to use a large number of modes with symbols chosen for each mode. When this option is used, there is less need for multiple declutter choices. Nevertheless, some declutter choice is desirable.

It is recommended that future HUDs have a minimum of two levels of declutter even if there are large numbers of modes available.

It is also recommended that, while a basic selection of symbols to be displayed for each mode be programmed into the HUD controls, the pilot be given the option to modify the programming and select which symbols be included with each level of declutter.

3. **AUTOMATIC DECLUTTER:** Under some limited circumstances, it may be desirable to automatically declutter the HUD without pilot intervention. This option must be used sparingly and with a great deal of caution. Instances where this might be desirable include large pitch or roll excursions typical of unusual attitudes, windshear encounters in transport aircraft, or excessively low altitude during air-to-aground weapons delivery (A/G) where a mandatory breakaway is commanded. During such cases, all non-essential data must be eliminated.

Extreme care should be used when incorporating these automatic declutter modes. For example, during air combat maneuvers (ACM) in tactical aircraft, pitch or roll attitudes might trigger such declutter. Such automatic action should not detract from the use of the HUD or from the mission.

D. BASIC HUD INFORMATION

The HUD should provide a clear, self-explanatory, and unmistakable display of aircraft attitude, flight path, and altitude. One symbol, normally aircraft pitch (THETA) or velocity vector (GAMMA) should be chosen as the aircraft symbol. The choice of primary aircraft symbol may vary from mode to mode. (Note, the symbols chosen for GAMMA and THETA should not change to reflect this. That is, it is not necessary to have a specific symbol for the aircraft symbol.)

The following parameters are recommended for a basic instrument HUD mode:

1. **AIRSPEED OR ANGLE-OF-ATTACK:** The airspeed, airspeed error, angle-of-attack, or angle-of-attack error should be shown on the left side of the display or on the left side of the aircraft symbol. The choice of airspeed or angle-of-attack may be at the pilot's option or it may be automatic. Airspeed or angle-of-attack may be de-selected by means of a declutter switch.
2. **ALTITUDE:** Altitude, radio or barometric, should be displayed to the right of the FOV or on the right side of the aircraft symbol. The choice of radio or barometric altitude may be at the pilot's option or it may be selected automatically. Altitude may be de-selected by means of a declutter switch.
3. **ATTITUDE:** As a minimum, the horizon line should be displayed. If velocity vector is not displayed, a pitch symbol must be displayed. It is highly recommended that a pitch symbol be displayed in addition to the velocity vector. The pitch symbol must be displayed in an Unusual Attitude Mode.
4. **HEADING:** The aircraft heading should be displayed as a scale on the horizon line, at the top of the FOV, or at the bottom

of the FOV. The heading may be de-selected by means of a declutter switch.

5. VELOCITY VECTOR: The velocity vector or flight path angle should be shown, if available. The velocity vector may be de-selected, if desirable, in an Unusual Attitude Mode or during ACM.
6. OTHER SYMBOLS: Other symbols should be shown depending on the operational needs of the pilot.

E. FAULT ALERTS

1. HUD DATA: The HUD should not display false or misleading information. If invalid data is received from HUD input sources, then the HUD should indicate the loss in validity by deleting the symbol(s) in question.

Symbols that are calculated using backup or reversionary sources (such as calculating velocity vector based on air data vice inertial data) should be clearly indicated to the pilot.

Symbols that are incorrectly positioned because of FOV limitations should clearly indicate this to the pilot. In the past, this has been successfully accomplished by placing an "X" over the symbol, by truncating the symbol at the FOV limit, or by adding a "LIM" near the symbol.

Particular care should be taken so that two symbols which are positioned relative to each other do not change this relationship when placed at or near the limit of the FOV. An example would be the flight director and the velocity vector (if the flight director is shown relative to the velocity vector as is common practice). When the velocity vector is limited by the FOV limit, this should not affect the relative location of the director steering symbol relative to the velocity vector. This might be accomplished by limiting the velocity vector slightly inside the FOV limit so the director steering symbol can still move around it.

The use of flashing symbols to indicate degraded or FOV limited data is not acceptable by itself.

Symbols that can be deleted by declutter should have a secondary warning when they are deleted because of faulty data. An example might be the annunciation "DELETED" in place of airspeed digits if airspeed is deleted because of invalid data. In this case, if airspeed data was invalid, but the airspeed deleted by a declutter option, the "DELETED" message would not be shown.

2. AIRCRAFT MASTER WARNING/MASTER CAUTION: The HUD should repeat the aircraft master warning and master caution annunciation. Specific annunciations should be included only if necessary for safe flight. If specific indications are used, they should conform to MIL-STD-411D or SAE-AS-425C.

F. SCALING

Generally one-to-one pitch scaling of HUD data has been preferred,, although other scalings have been shown to be advantageous under some circumstances. A slight compression (of the order of 1.5:1 or 2:1) may help tracking performance and may be useful if a conformal display is not needed (such as during high altitude cruise).

This pitch compression or more can be of assistance to the pilot during large amplitude maneuvers (such as ACM, acrobatics, or unusual attitude (UA) recoveries). An Unusual Attitude Mode has been suggested with pitch compression and limited data to assist the pilot during spatial disorientation. Such a mode is recommended for all aircraft, transport as well as tactical.

One-to-one scaling is indicated during ground reference maneuvers (such as landing).

G. REFERENCE

Traditionally, the location of the reference for error displays (course deviation information, airspeed error, angle-of-attack error, etc.) has been the primary aircraft symbol. Normally this location would be recommended, however some recent successful HUDs have used the intersection of the horizon line and the selected course as the reference for ILS deviation error. Further, recent studies indicate that increased use of the pitch symbol as a reference may enhance resistance to spatial disorientation. It is premature to insist that deviations and error symbols be referenced to the primary flight symbol.

Flight director information should have zero reference located at the primary airplane symbol unless enhanced performance can be demonstrated.

The special relationship between ALPHA, GAMMA, and THETA must be considered when selecting a reference for angle-of-attack error. (See Section VI. D. below.)

H. SYMBOL PRIORITY

A table of symbol priority must be established for those symbols that can move within the FOV. If any symbols can over-write one another, the symbol generator must use this symbol priority table

to blank the symbol of lower priority to prevent interference with the legibility of the higher priority symbol.

The lower priority symbols should be partially or completely blanked as it approaches the lesser priority symbol. This symbol priority table is not the same as the order of decluttering. For example, in most display formats, the pitch ladder is never decluttered, yet it has the lowest rank on the symbol priority table for most formats. (That is, when the a portion of the pitch ladder approaches another symbol, a mask around the other symbol blanks the pitch ladder in the neighborhood of the other symbol.)

Recommended symbol priorities are shown in Appendix B.

VI. SYMBOLOGY CRITERIA

A. GENERAL

Symbols should appear clean-shaped, clear, and explicit. Lines should be narrow, sharp-edged, and without halo.

The meaning and behavior of symbols must be consistent for all modes of a given display.

B. ACCURACY

The accuracies of symbol placement should be commensurate with the intended use of the parameter and the operational requirements. All accuracies, except boresight accuracy, should be considered system accuracies, not just HUD accuracies.

1. BORESIGHT: The recommended boresighting accuracy specifications are

Tactical aircraft:	1.0 mr
Transport aircraft:	3.0 mr

2. CONTACT ANALOG SYMBOLS: Positioning of contact analog symbols should produce no discernible mismatch with the real world cues. If a mismatch is unavoidable, symbolic rather than realistic symbols should be used (see runway symbols in Appendix A for example.)

3. OTHER SYMBOLS: Recommended positioning tolerances of other symbols are

Conformal symbols:	1 mr
Non-conformal symbols:	3 mr

4. STANDBY RETICLE: Positioning of the standby reticle should be commensurate with the intended use of the HUD.
5. PLATFORM ACCURACIES: Recommended platform accuracies are shown in Paragraph IV. C. 1.

C. DYNAMIC RESPONSE

The motion of all analog symbols on the HUD should be smooth, with no objectionable overshoot, and should generally track the short period of the airplane. Symbols should be stable with no discernible flicker or jitter.

1. FLICKER: Symbols should show no discernible flicker. A minimum symbol refresh rate of 50 Hz is recommended. Note: The use of 60 Hz may enhance recordability with video recording equipment.

The HUD should be synchronized with other CRT displays visible to the pilot. This is particularly important when basic refresh rates less than 60 Hz are used.

2. JITTER: Symbols should be stable with no discernible jitter, i. e. less than the minimum linewidth (3 sigma). Motion at frequencies above 0.25 Hz is considered jitter.
3. NOISE: Display noise should not cause symbol forms or accuracies to exceed recommended or specified limits. Display noise should not interfere with the intended use of the HUD.
4. FRAME TIMES: Recommended minimum sampling rates for aircraft attitude, inertial velocities, and accelerations are

Tactical aircraft:	25	Hz (up-and-away)
	12.5	Hz (landing config.)

Transport aircraft:	10	Hz
---------------------	----	----

These rates correspond to frame times of 40 msec for tactical aircraft (up-and-away), 80 msec for tactical aircraft in the landing configuration, and 100 msec for transports. Slower sampling rates (3-4 Hz) may be used for other quantities, such as airspeed and altitude. Airspeed data for air mass velocity vector calculations should be sampled at the rates shown unless no degradation in performance can be shown.

5. QUICKENING: Symbol quickening may be required to yield a "flyable" symbol. Symbol quickening should not change automatically (within a given mode) in a non-failure state. Symbol quickening should be kept to the minimum necessary to provide a flyable symbol.
6. DAMPING: Symbol damping may be required to yield a "flyable" symbol. Symbol damping should not change automatically (within a given mode) in a non-failure state.
7. PLATFORM RESPONSES: Recommended platform response requirements are shown in Paragraph IV. C. 2.
8. DIGITAL DISPLAYS: Digital displays, such as airspeed, altitude, etc., should not be refreshed on the display faster than 3-4 Hz. The data can be updated at a faster rate and used in the other flight control computations at faster rates, but the data displayed on the HUD should change at this rate.

D. FLY-TO-SENSE

All error symbols should be "fly-to" symbols. The only exception has historically been the angle-of-attack error which, in some airplanes, has had a "fly-from" sense.

The choice for the angle-of-attack sense is based on two conflicting criteria. The conventional criteria of always "flying-to" an error and the geometrical criteria of attempting to show the relationship between ALPHA, GAMMA, and THETA which leads to a "fly-from" sense. Selection on one choice would be premature at this time.

Both criteria could yield a "fly-to" sense if the angle-of-attack error used the aircraft pitch symbol as its reference. Requiring this option would be premature at this time.

E. PITCH SCALING CONSIDERATIONS

If compressed pitch scaling is used to assist in unusual attitude recognition or for use in acrobatic flight, it will not be possible for the various HUD symbols to all be conformal. The common choices in compressed pitch scale use are to have the aircraft pitch symbol (waterline) remain fixed in the HUD FOV, to have the horizon symbol remain conformal with the real world horizon (zero pitch angle), or have the velocity vector symbol remain conformal with the true velocity vector. For most applications, it is recommended that the HUD horizon remain conformal with the real world horizon.

For ground referenced maneuvers (A/G weapons delivery, landing approach, or terrain following) with inertial velocity vectors, then the HUD velocity vector should remain conformal with the true velocity vector.

In either case, the angular relationships between ALPHA, GAMMA, and THETA should be retained (although compressed).

Target symbols should overlies the actual target and not be shown at the correct angles on the pitch scale.

F. CODING

Each symbol should be unique by virtue of at least two coding characteristics. Color coding is acceptable, however colors should be consistent with head-down displays. Flashing of symbols should be minimized. Flashing may be used to attract attention to a symbol, but should not be used by itself to denote data error, FOV limits, decision height, etc.

G. DIRECTED DECISION CUES

The use of a directed decision cue must be held to an absolute minimum and confined to those situations where loss of the aircraft is imminent if the trajectory is continued (i. e. a break-away commanded because of impending ground impact). Landing minimums, if annunciated, should use "MINIMUMS" not "GO-AROUND."

The use of directed decision cues during combat, such as "SHOOT" should be avoided since this requires the pilot to follow specific tactics which may not be desired in all situations. An "IN RANGE" annunciation is preferred to "SHOOT."

H. SIZE AND SHAPE OF SYMBOLS

Generally, the symbols in MIL-STD-1797 are recommended. Where other symbols are recommended, these are shown in Appendix A.

I. SIZE AND SHAPE OF CHARACTERS

1. SIZE OF CHARACTERS: The size of alphanumeric characters will depend on the degree of importance attached to the particular character. Recommended size guidelines are

Basic size:	4 X 8 mr
Maximum size:	8 X12 mr

2. SHAPE OF CHARACTERS: The shape of alphanumeric characters has not been specified in the past. Two recommended fonts are the MIL-M-18012 and the Leroy fonts.

J. LINE WIDTH

The recommended line width is:

Unenhanced:	1.0 mr
Enhanced:	3.0 mr

K. MINIMUM MOVEMENT

The minimum movement of symbols should be

Minimum movement:	0.135 mr
-------------------	----------

L. VIDEO DISPLAY CRITERIA

Video display criteria should be developed. In the interim, the criteria of MIL-D-87213 should be followed.

VII. PRIMARY FLIGHT REFERENCE CRITERIA

A. GENERAL

HUDs intended for use as primary flight references are clearly critical to flight safety. Many of the specific requirements have been discussed in the appropriate sections of the Head-Up Display Design Guide. Because of the interest in HUDs as primary flight references and because of the critical nature of such displays, this section discusses some issues of primary flight references (PFRs).

PFRs are defined in Section II as providing sufficient information for the pilot to fly the airplane in IMC during a particular mission segment. As guidance to the designer, "sufficient information" can be defined as the information contained in the traditional basic T, i. e. airspeed, altitude, attitude (pitch and roll), heading, and (usually) course guidance information. Obviously, the specific data may vary, ALPHA (angle of attack) may be substituted for airspeed, radar altitude for barometric altitude, etc.

The PFR provides data for the pilot to control the airplane, i. e. climb/descend, bank left/right, etc. It will not include navigation data nor will it include systems data unless critical to the mission segment.

Normally, a HUD should be treated as a PFR since the pilot will likely use it as such as if it were the primary flight reference regardless of the words in the flight manual.

B. DATA REQUIREMENTS

The need for course deviation, navigation, or systems data during a specific mission segment will depend on how critical constant reference to a specific parameter is. As an example, consider course deviation. During normal cruise at high altitude, it could be considered that course deviation data would not be required for a PFR, while during an ILS final approach, both course and glideslope deviation data would be. Both the UO and CA will have to determine if a specific data parameter (i. e. course deviation) is required depending on the complexity of the tracking task. Overwater, high-altitude cruise will not normally require course deviation; terminal tracking certainly will.

Table I lists typical data requirements for a PFR in terms of traditional data likely to be on a HUD. The table shows these requirements for various mission segments.

Table I
Typical Data Requirements
for a Primary Flight Reference HUD

PARAMETER	MISSION SEGMENT					
	TOGA	CRUISE	TERM- INAL	FINAL (N/P)	FINAL (PRE)	AIR-TO- AIR
PITCH	X	X	X	X	X	X
ROLL	X	X	X	X	X	X
VEL VECTOR	X		?	?	X	?
HEADING	X	X	X	X	X	X
LAT DEV	X	?	X	X	X	?
VERT DEV			?		X	?
ALTITUDE	X	X	X	X	X	X
AIRSPEED	X	X	X	X	X	X
ALPHA	?			?	?	X
BETA	?			?	?	

Note: Instrument meteorological conditions are assumed.

These data may be replaced by other data which will allow the pilot to accomplish the mission segment. For example, ALPHA would be an acceptable substitute for airspeed on final approach, but not during an air-to-ground delivery.

Declutter of data required to be on a HUD primary flight reference should be permitted provided the pilot can regain the decluttered data without removing his/her hands from the aircraft controls (stick and throttle).

C. EQUIVALENCE WITH HEAD-DOWN DISPLAYS

If the HUD is to be the primary flight reference, it must be possible to view substantially the same data on the head-down panel. This is required for several reasons: as a backup to the HUD symbol generator, to allow the pilot to view the display without the view of the external real world cues, and to allow the pilot to have a close focus when cross-checking instrument panel data.

Substantially the same data means the data must be in the same format as the HUD, although the scale may be compressed and declutter options may be omitted. Additional data, not present on the HUD may be present if there is no interference with the use of the the display to fly the airplane. The display may be a color display even if a monochromatic HUD is used. The two displays, HUD and head-down should use the same mode switch to ensure that they are operating in the same mode.

The head-down display should be visible in the PVSA at all times, unless mission requirements require all usable panel space. In this event, the display must be available when called for by the pilot (without the need to remove his or her hands from the aircraft controls). This requirement applies to the pilot flying in two pilot airplanes.

In two pilot airplanes, the pilot not flying must have this head-down display visible in the PVSA at all times (assuming no failures). The pilot flying (on two pilot airplanes) must be able to regain the head-down display at any time (again keeping his/her hands on the controls). This means that the pilot flying may be flying by reference to the HUD and must have substantially the same display shown on his primary panel unless mission requirements dictate the use of this panel space. The pilot not flying must have the equivalent display shown head-down on his primary panel at all times whether or not he uses the HUD.

D. HUD SYMBOLOGY FOR A PRIMARY FLIGHT REFERENCE

A primary concern for HUDs intended for use as PFRs is the need to prevent occurrence of and to aid in the recovery from unusual attitudes (UAs). To this end, any such HUD must be designed with UA recovery and spatial disorientation in mind.

Aircraft pitch attitude, not velocity vector, is of primary importance during UA recovery. At large angle-of-attack, the velocity vector will not be responsive to control inputs. In particular, a large ALPHA indicated by a large negative GAMMA and a nose high THETA must not cause the pilot to attempt recovery by raising the velocity vector by pulling on the control column. With present HUD formats and existing pilot backgrounds, two symbologies are essential: (1) the pitch reference frame (pitch ladder) must clearly indicate aircraft pitch during extreme pitch excursions, and (2) the velocity vector must not attract the pilot's attention from the pitch attitude.

The pitch ladder format must clearly indicate nose high angles from nose low. A format which accomplishes this is the modified F-18 format in which negative angles (i. e. below the horizon) are slanted to indicate the direction to the horizon. As additional discriminants, the negative "rungs" of the pitch ladder are dashed, have the vertical ticks in the center and have the numerical angles on the left side only. The dashing of the "rungs" should be at three to five dashes per degree. Positive angles should use solid horizontal lines with tick marks at the outside edge and numerical indices on both sides. Five degree spacing is recommended for 1:1 scaling.

The pitch reference for a HUD intended for a PFR should use a complete pitch ladder, not just a horizon line or a horizon line and a pitch mark. While the use of a horizon lines alone has been suggested in the past for transports, the possibility of an

UA in a transport can not be ignored. A horizon line only (or a horizon line plus a pitch mark) would be acceptable only if a clear improvement in performance can be shown and if reversion to a conventional pitch ladder is automatic during UAs before the horizon leaves the instantaneous field of view from any point within the eyebox.

De-emphasizing the velocity vector at large ALPHAs has been accomplished by deleting the velocity vector when ALPHA becomes excessive. It is also possible to use the pitch reference symbol (waterline) as the basis for angle-of-attack error or for the ALPHA scale. The velocity vector can also incorporate a fly-from ALPHA error symbol (as on the A-7C/D/E HUD). Preliminary simulator experiments indicate that deletion of the velocity vector symbol at high ALPHA is preferred.

Other data shown on the HUD will depend on the specific requirements of the mission segment. The aircraft master warning and master caution annunciation must be repeated on the HUD.

E. PRIMARY FLIGHT DISPLAY RELIABILITY

The reliability of a HUD primary flight display, in general, should match or exceed that of the head-down instruments it is replacing. The system must be designed such that the displaying of incorrect attitude information is extremely improbable. HUDs intended for precision instrument approach primary flight references should be designed such that the displaying of incorrect attitude or course guidance information is extremely improbable.

When incoming data or processing that affects primary symbology is identified as invalid, the affected symbology should automatically be deleted or should revert to a backup mode. The processor should check the incoming data needed to generate the primary symbology for reasonableness with respect to physical aircraft parameters. It should also cross-check related data for predetermined differences if more than one source of data is available.

At a minimum, there should be two symbol generators available to provide symbology to the HUD (one of which can drive the symbology for the head-down display discussed previously).

There is no particular reason why an electronic display can not serve as a stand-by attitude indicator provided it has sufficient reliability. A general rule is that the standby indicator must be more reliable than the primary indicator. The standby attitude indicator in a single pilot airplane must be clearly visible at all times without pilot selection.

F. HUD MODE SWITCHING FOR A PRIMARY FLIGHT REFERENCE

Automatic HUD mode switching is not desirable for a display intended as a primary flight reference. While some modes of flight do use automatic switching (such as the breakaway X in ground attack), these HUDs have implicitly assumed VMC. While automatic switching may be acceptable in IMC (The use of a PFR assumes IMC.), care must be taken not to delete the pitch reference needed by the pilot to recover from UAs and to fly the airplane.

It is highly recommended that any HUD intended as a PFR incorporate a basic instrument mode which can always be selected by the pilot regardless of the other modes being used. The pilot should be able to select this mode without removing his or her hands from the flight controls. This could be accomplished by a dedicated switch on the stick or throttle. This will always provide basic attitude reference as well as airspeed, altitude, and heading.

G. INERTIAL VS. AIR MASS DATA

There are valid reasons to choose either air mass or inertial velocity vector data. The use of air mass data allows direct integration of ALPHA and BETA (sideslip). Where ALPHA information is critical (such as high ALPHA near stall), or BETA information is critical (such as or engine-out situations), the use of air mass data is recommended to show ALPHA and BETA directly (Figure 1). If inertial data is used, non-conformal ALPHA and BETA cues must be introduced (Figure 2).

Historically, the choice of whether to use inertial or air mass velocity vector data has depended on whether or not an inertial navigation system (INS) was installed in the airplane. This is not a valid reason for this decision. Just because we can display something doesn't mean we should. While an INS is required to show inertial velocity vector, the needs of the pilot may dictate a need for air mass data. Further, it is not necessary to use ALPHA and THETA data to calculate GAMMA. GAMMA can be found using the relationship of vertical velocity and horizontal velocity. The same computation which produces an inertial $\text{GAMMA} = \arcsin(\text{vertical velocity} / \text{inertial velocity})$ can substitute true airspeed for inertial velocity and calculate air mass GAMMA. If an air mass velocity vector is needed, it would be desirable to use a filtered GAMMA derived from both ALPHA and THETA data and from inertial vertical velocity and air data computer true airspeed.

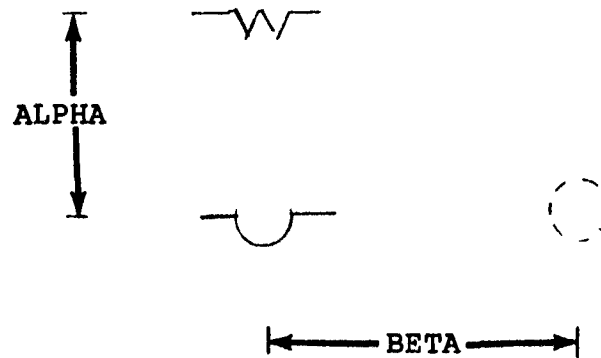


Figure 1

ALPHA and BETA Using Air Mass Velocity Vector




Figure 2

ALPHA and BETA Using Inertial Velocity Vector
(Reference to waterline shown, reference to velocity vector is optional)

EVALUATION OF HEAD-UP DISPLAYS
TO ENHANCE UNUSUAL ATTITUDE RECOVERY

APPENDIX I

Subject Pilot Comments

APPENDIX A: RECOMMENDED SYMBOLS

The following symbols are recommended for use in HUDs and other electronic attitude indicators. Where no symbols are listed in this appendix, the symbols in MIL-STD-1787 are recommended.

A. FLIGHT SYMBOLS

1. AIRSPEED:

The recommended format is a digital display. The digits should be fixed in the FOV near the left side of the Fixed Aircraft Symbol (waterline). The top of the box should be level with the wings on the waterline symbol. The airspeed digits should be 150% of the dimensions of the basic HUD digits. The preferred format is plain digits surrounded by a box. Alternative formats delete the box around the digits or surround the digits with a circle with a "minute hand" display in which the index makes one revolution for every 100 knots.

The use of analog tapes has been thought to detract from spatial orientation by providing a false horizon ninety degrees to the real one. For this reason, vertical tapes should be avoided in future HUDs unless enhanced mission effectiveness can be demonstrated.

The normal airspeed (indicated or calibrated airspeed) should not be denoted. Failure states or alternative speeds should be denoted with a letter or a word:

- a. INDICATED AIRSPEED: I or IAS
- b. TRUE AIRSPEED: T or TAS
- c. MACH NUMBER: M or MACH



Figure A-1

Alternate Airspeed Symbol
(Showing "minute hand")

2. ALTITUDE:

The recommended format is a digital display. The digits should be fixed in the FOV near the right side of the Fixed Aircraft Symbol (waterline). The top of the box should be level with the wings on the waterline symbol. The preferred format is plain digits surrounded by a box. The ten thousand, thousand, and hundred feet digits should be 150% the dimensions of the basic HUD digits. The tens and units digits should be the size of the basic HUD digits. Alternative formats delete the box around the digits or surround the digits with a circle with a "minute hand" display in which the index makes one revolution for every 1000 feet. The format is similar to the airspeed display shown in Figure A-1.

The barometric altitude should not be denoted. Radio or radar altitude should be denoted with an R or with the word RADIO, RADAR, or RAD.

3. ANGLE OF ATTACK (ALPHA):

The symbol shown in MIL-STD-1787 has been successful. The fly-to or fly-from sense is not specified. At this writing, alternative presentations should be developed to exploit the unique relationship between ALPHA, GAMMA, and THETA.

4. ANGLE OF SIDESLIP (BETA):

The choice of display has not been resolved at this writing. As is the case with angle of attack, the relationship between the velocity vector and the fixed aircraft reference could be used. As an interim recommendation, the symbol shown should be used when BETA is critical.

Alternatively, the angular difference between the air mass velocity vector and the ghost velocity vector can be used. (See Figure 1 in the main text.)

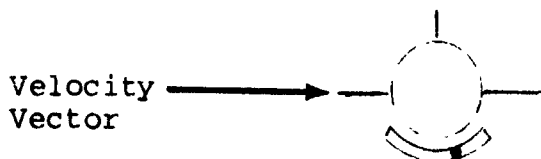


Figure A-4

Interim Angle-of-Sideslip (BETA) Symbol
(Symbol proposed for Inertial Velocity Vector)

5. BANK:

The bank index should only be used for precision instrument flight if procedures require. The index is shown in MIL-STD-1787. The choice of top or bottom (sky pointer or earth pointer) should agree with the head-down instruments.

For orientation, the arrow symbol on the velocity vector has been shown to be effective during simulations.




Figure A-5

Arrow on Velocity
Vector (Augie Arrow)

6. FIXED AIRCRAFT REFERENCE (THETA):

This symbol is shown in MIL-STD-1787 and is referenced to the ACRL and represents an extension of (or the direction of) the ACRL. For HUDs with 1:1 pitch scaling, it is in a fixed location on the display. For HUDs with other scalings, it should be placed at the appropriate location to show aircraft pitch.

7. FLIGHT PATH ANGLE: (see velocity vector or ghost velocity vector)

The use of the velocity vector and a ghost velocity vector is recommended rather than the horizontal line.



Figure A-3

Flight Path Angle Symbol

8. GHOST VELOCITY VECTOR: (see flight path angle or velocity vector)

The ghost velocity vector should be displayed at the true location of the velocity vector position if the velocity vector differs by more than a specified angle from the caged position (recommended as two degrees).

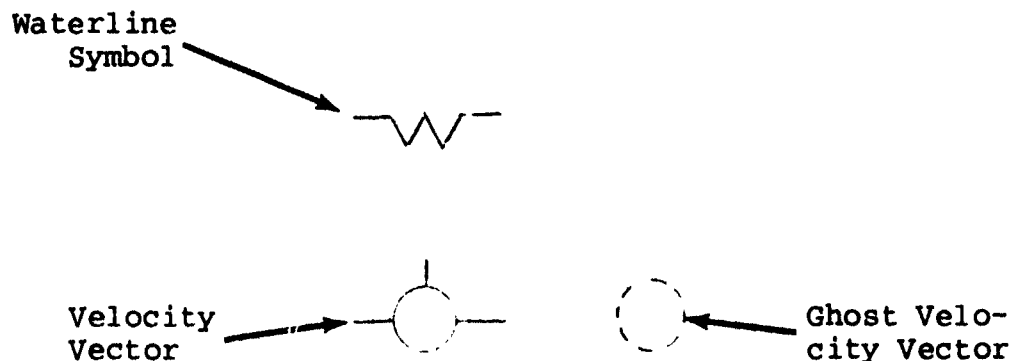


Figure A-8

Ghost Velocity Vector Symbol
(Shown to right of velocity vector)

9. HEADING:

The format is given in MIL-STD-1787. The preferred location is to place the heading marks on the horizon line. This has the advantage of maintaining spatial awareness of heading during steep turns, but the disadvantage of losing heading information during extreme pitch attitudes. If this method is used, the heading information must remain in view -- usually with a digital heading directly above the waterline symbol. Alternatively, the heading could be placed on a pitch ladder rung near the waterline. Similar approaches have been found to be successful on three-axis attitude indicators.

An alternative location is to place the scale should be fixed at the top or bottom of the FOV. Using a boxed digital heading in the center of the symbol has also been used successfully (F-18). If digital heading is used, the heading digits should be 150% of the dimensions of the basic HUD digits. (Heading digits on the horizon or heading scale should be the size of the basic HUD digits.)

Magnetic heading should be the default indication and should not be denoted. Other heading references should be denoted with a letter or a word:

- a. TRUE HEADING: T or TRUE
- b. GRID HEADING: G or GRID

10. HORIZON LINE:

The horizon line is shown in MIL-STD-1787. The 30 mr gap in the center is optional. The use of a horizon line alone is not recommended since during unusual attitudes it may not be visible within the IFOV. If a horizon line alone is to be used, provision to replace it with a pitch ladder before the horizon line leaves the IFOV must be incorporated.

11. NORMAL LOAD FACTOR:

A digital readout is recommended. The location is unspecified.

12. PITCH LADDER:

The pitch ladder above the horizon is shown in MIL-STD-1787. The pitch ladder below the horizon should be slanted up in the middle when the depression angle exceeds minus ten degrees or when the horizon is no longer visible in the IFOV (similar to the F-18). The vertical ticks for negative angles should be in the center of the FOV. The negative angles should be shown on the left side only with no minus sign. Negative angles should use dashed lines (dashed at 3 dashes per degree).

As an alternative, the F-18 pitch ladder can be used. That is, the above-horizon rungs should also be slanted. A second alternative is the conventional pitch ladder from MIL-STD-1787. That is the below-horizon rungs need not be slanted

Regardless of the pitch ladder style, at the zenith or nadir, the 90 degree mark should be indicated by a "DIVE" or "CLIMB" legend. The pitch ladder should not rotate as the airplane passes through the 90 degree pitch up or down point.

The pitch ladder should be centered on and rotate around the fixed aircraft reference.

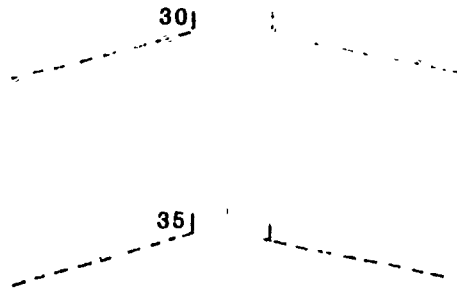


Figure A-12A

Pitch Ladder Below Horizon
(Slanted at twice angle below horizon)

98 | _____ | 98

CLIMB

85 | _____ | 85

Figure A-12B

Pitch Ladder Indication at Zenith




Figure A-12C

Pitch Ladder Indication at Nadir

13. POTENTIAL FLIGHT PATH (PFP):

Reference is the velocity vector. The right symbol is optional.

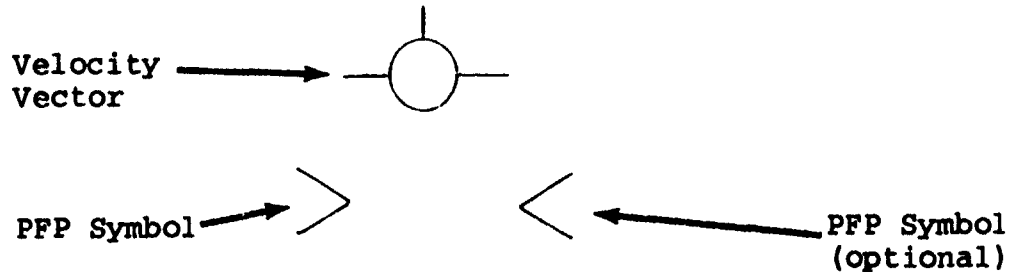


Figure A-13

Potential Flight Path (PFP) Symbol
(Shown with velocity vector)

14. VELOCITY VECTOR (INERTIAL):

The symbol is shown in MIL-STD-1787. It may be caged at the center of the pitch ladder at pilot option.

15. VELOCITY VECTOR (AIR MASS):

This symbol differs from the inertial velocity vector and is always caged. (See flight path angle or ghost velocity vector.)



Figure A-15

Velocity Vector (Air Mass) Symbol

16. VERTICAL VELOCITY:

The recommended symbol is digital. It should be located below the altitude presentation. Vertical velocity is not normally necessary if velocity vector is available.

B. NAVIGATION SYMBOLS

17. DME:

This symbol should be a digital indication. The location is not specified.

18. RUNWAY SYMBOL:



Figure A-18A

Runway Symbol
(Inertial Navigation System)



Figure A-18B

Runway Symbol
(No Inertial Navigation System)

19. STEERING BOX: (see deviation)

Reference is the velocity vector. Other references have been successful, such as desired heading and desired glideslope. The dimensions of the steering box change with the allowable error. (See deviation cue.)

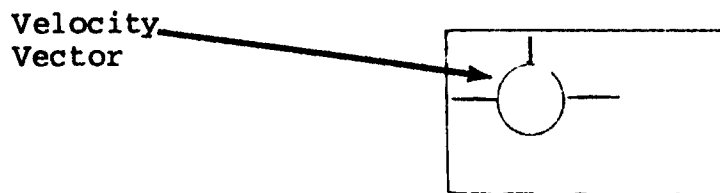


Figure A-19

Steering Box (Deviation) Symbol
(Fly down and right)

20. TIME TO GO:

This symbol should be a digital indication. The location is not specified.

APPENDIX B: RECOMMENDED DATA FOR DIFFERENT HUD MODES

Within each mission segment, a set of recommended data symbols are listed. A letter "D" denotes symbols that can be allowed to be decluttered by the pilot. Underlining indicates symbols recommended which should be present if the display is to be considered a PFR. Note: the use of a PFR assumes flight in IMC.

Symbols are ordered showing priority of display. If two symbols would interfere, the symbol shown first should cause subsequent symbols to be blanked.

The priorities and choice of required symbols for PFRs are recommendations.

A. BASIC MODE -- UNUSUAL ATTITUDE RECOVERY

WATERLINE AIRCRAFT REFERENCE

AIR MASS VELOCITY VECTOR (delete at high ALPHA)

AIRSPEED

ALTITUDE

HEADING

BANK (Augie arrow recommended for UA)

PITCH LADDER (compressed scaling optional.

2:1 scaling recommended for UA.

If compressed scaling used, horizon should remain conformal.)

B. TAKEOFF/GO-AROUND

WATERLINE AIRCRAFT REFERENCE

D ANGLE-OF-ATTACK (desired)

VELOCITY VECTOR (air mass recommended)

D AIRSPEED

D ALTITUDE

D ANGLE-OF-SIDESLIP (multi-engine or VTOL)

D HEADING

D POTENTIAL FLIGHT PATH (desired)

D COURSE DEVIATION (optional)

D FLIGHT DIRECTOR (optional)

D SPEED COMMAND (optional)

D RUNWAY REMAINING (on runway, optional)

PITCH LADDER

C. CRUISE

WATERLINE AIRCRAFT REFERENCE
D VELOCITY VECTOR
D COURSE DEVIATION
D VERTICAL DEVIATION (optional)
D FLIGHT DIRECTOR (optional)
D WAYPOINT (optional)
D DIRECTION CUE (optional)
D AIRSPEED
D ALTITUDE
D HEADING
D RANGE (optional)
D DME (optional)
D TIME-TO-GO (optional)
PITCH LADDER

D. APPROACH/LANDING

WATERLINE AIRCRAFT REFERENCE
VELOCITY VECTOR
D FLARE CUE (optional)
D COURSE DEVIATION (optional for VMC)
D GLIDESLOPE DEVIATION (for ILS approach)
D FLIGHT DIRECTOR (optional)
D POTENTIAL FLIGHT PATH (desired)
ANGLE-OF-ATTACK (desired)
D ANGLE-OF-SIDESLIP (multi-engine or VTOL)
D RUNWAY REMAINING (on runway, optional)
D AIRSPEED (may be replaced by ANGLE-OF-ATTACK)
D ALTITUDE
D HEADING
D SPEED COMMAND (optional)
PITCH LADDER

E. TERRAIN FOLLOWING

BREAKAWAY
WATERLINE AIRCRAFT REFERENCE
VELOCITY VECTOR (inertial recommended)
D VERTICAL DEVIATION
D POTENTIAL FLIGHT PATH (optional)
D COURSE DEVIATION
D FLIGHT DIRECTOR (optional)
D DIRECTION CUE (optional)
D AIRSPEED
D ALTITUDE
D HEADING
D RANGE (optional)
D TIME-TO-GO (optional)
D WAYPOINT (optional)
PITCH LADDER

F. AIR TO GROUND

BREAKAWAY
WATERLINE AIRCRAFT REFERENCE
VELOCITY VECTOR (inertial recommended)
D ANGLE-OF-SIDESLIP (if needed)
D BANK INDEX (if needed)
BOMBFALL LINE (if needed)
CCIP (if needed)
TARGET SYMBOLS (if needed)
SOLUTION CUE (if needed)
D AIRSPEED
D ALTITUDE
D VERTICAL VELOCITY (if needed)
D NORMAL LOAD FACTOR (if needed)
AIMING RETICLE (if needed)
WEAPON BORESIGHT (if needed)
PITCH LADDER

G. AIR TO AIR

WATERLINE AIRCRAFT REFERENCE
D VELOCITY VECTOR
D AIMING RETICLE (if needed)
CCIL (if needed)
TARGET SYMBOLS (if needed)
SOLUTION CUE (if needed)
SENSOR SEARCH AREA (if needed)
D AIRSPEED
D ALTITUDE
D HEADING
D VERTICAL VELOCITY (if needed)
D ANGLE-OF-ATTACK (if needed)
D NORMAL LOAD FACTOR (if needed)
D WEAPON BORESIGHT (if needed)
D PITCH LADDER

H. TRAINING (BASIC HUD FLYING)

D WATERLINE AIRCRAFT REFERENCE
D VELOCITY VECTOR
D ANGLE-OF-SIDESLIP (multi-engine or VTOL)
D COURSE DEVIATION (optional)
D AIRSPEED
D ALTITUDE
D HEADING
D ANGLE-OF-ATTACK (if not clear from GAMMA and
THETA relationship)
D PITCH LADDER

I. SYMBOL REPLACEMENT OPTIONS

PITCH LADDER ----- Replace by Horizon with automatic replacement by pitch ladder when horizon leaves IFOV. (Note: This substitution is not recommended for the Basic Mode)

AIRSPPEED ----- Replace CAS/IAS by TAS or MACH (label as TAS or MACH.) Note: Primary airspeed (either IAS or CAS) should have no label.

ALTITUDE ----- Replace Barometric Altitude by Radar (label as Radar) Note: Barometric altitude will have no label.

ILS DEVIATION ----- Replace Course and Glideslope Deviation by Runway Symbol.

DECLUTTER ----- Declutter recommendations are shown by a D.

VELOCITY VECTOR --- Delete at large angle of attack.

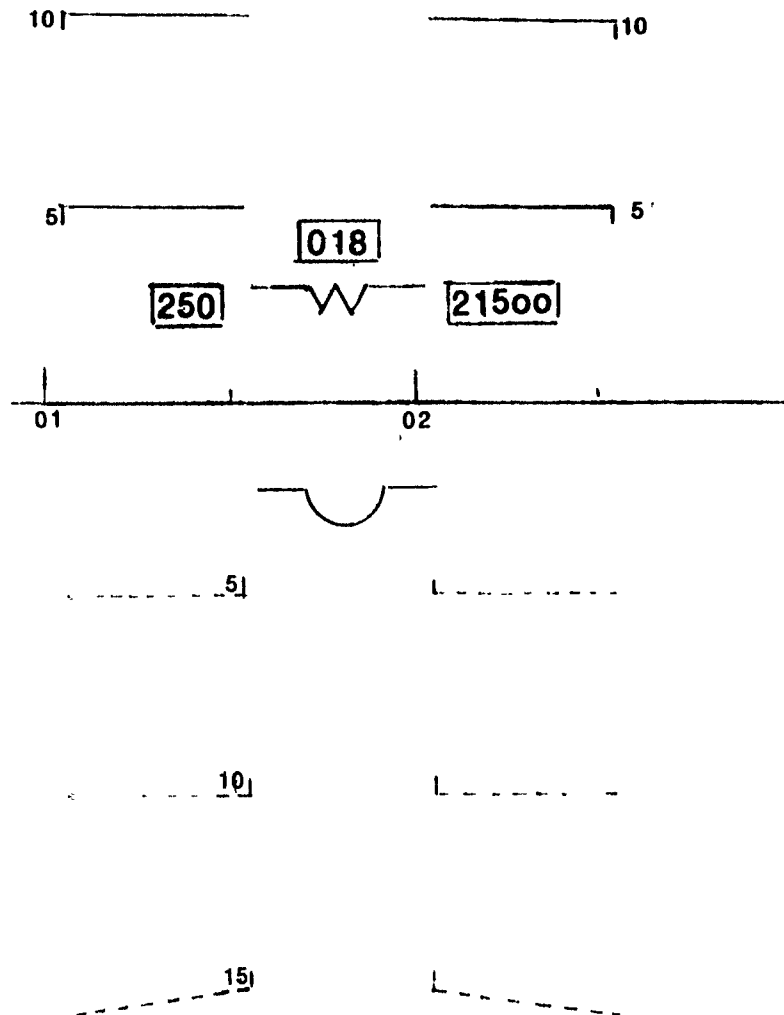


Figure B-1

BASIC MODE

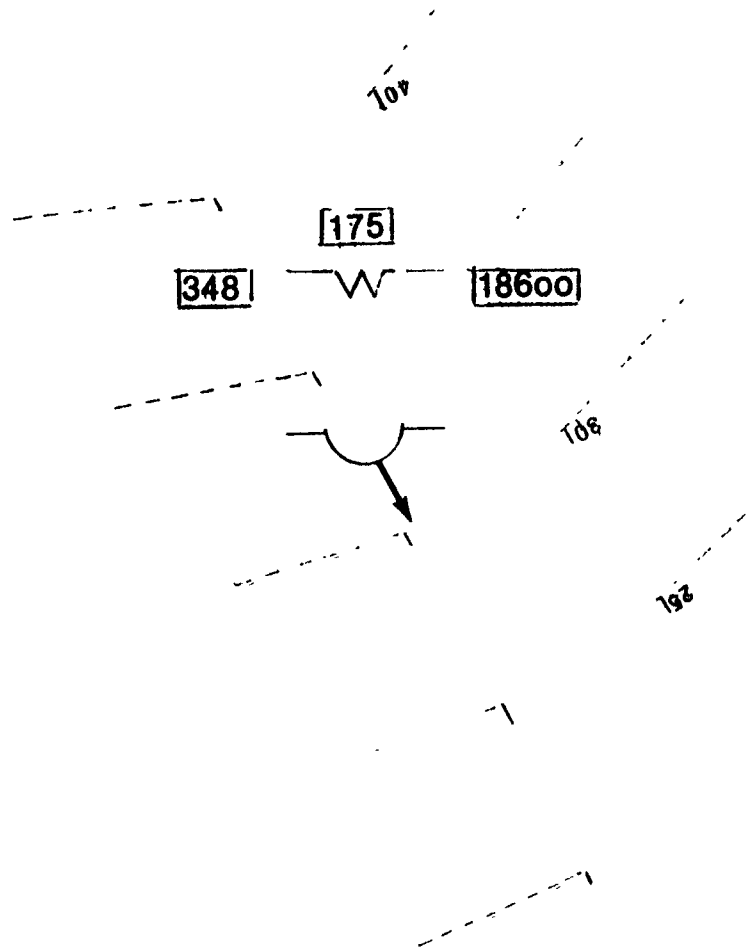


Figure B-2

BASIC MODE -- UNUSUAL ATTITUDE RECOVERY

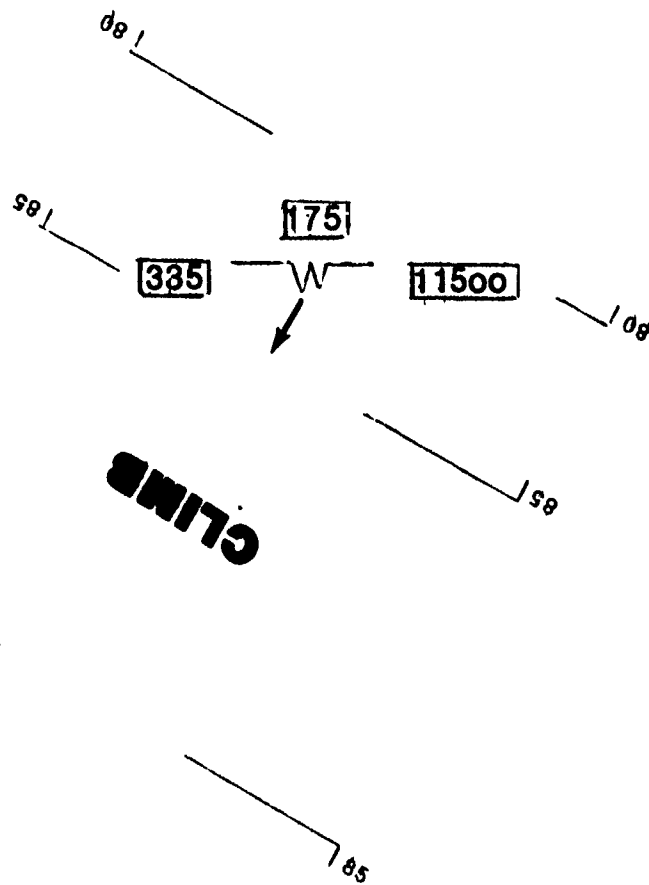


Figure B-3

BASIC MODE -- UNUSUAL ATTITUDE RECOVERY
(Velocity vector deleted at large ALPHA)

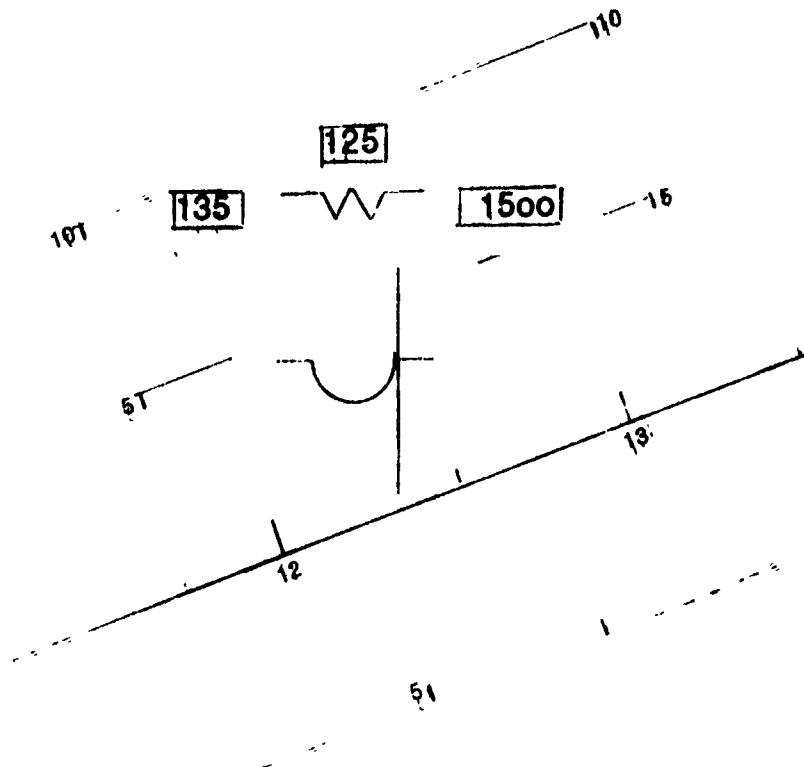


Figure B-4

TAKEOFF/GO-AROUND MODE

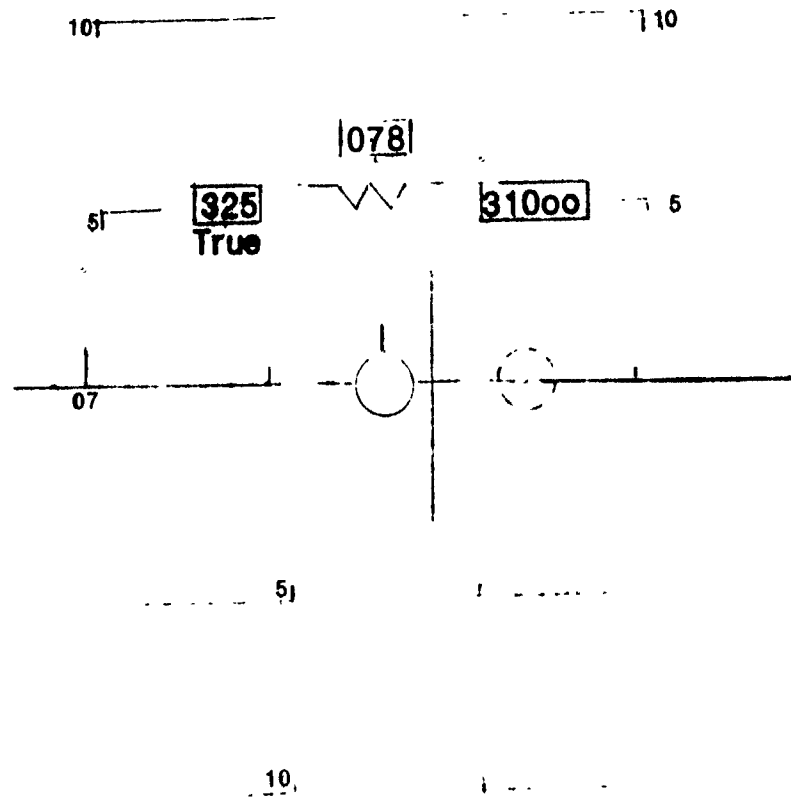


Figure B-5
CRUISE MODE

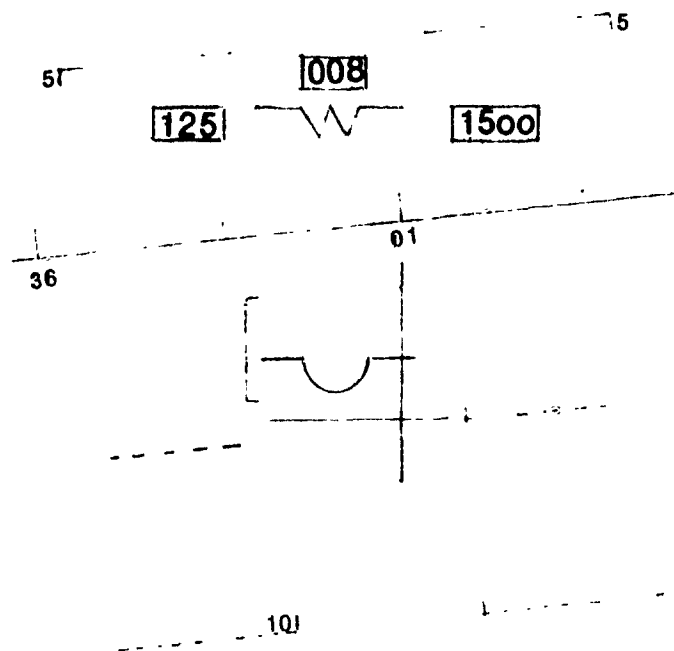


Figure B-6

APPROACH/LANDING MODE
(ILS deviation and air mass velocity vector)

101

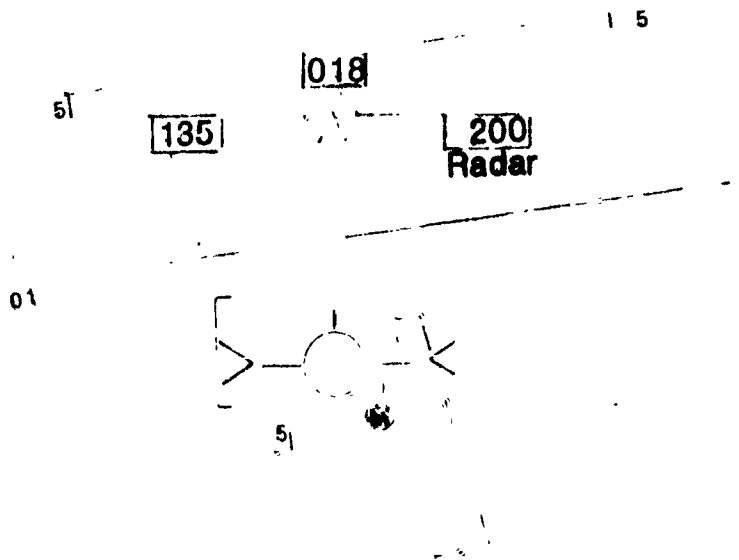


Figure B-7

APPROACH/LANDING MODE WITH RUNWAY SYMBOL
(INS data and inertial velocity vector)


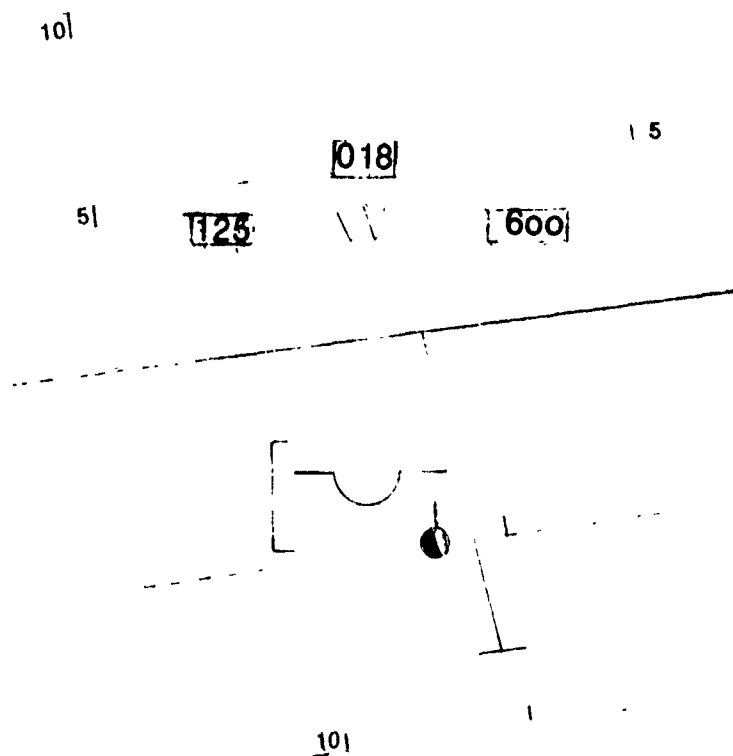


Figure B-8

APPROACH/LANDING MODE WITH RUNWAY SYMBOL
(No INS data available)

101

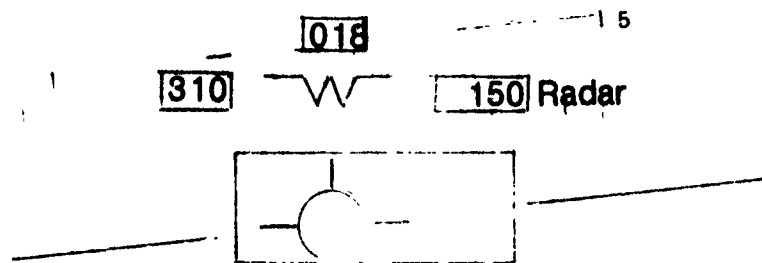

51

Figure B-9

TERRAIN FOLLOWING MODE

APPENDIX C: ABBREVIATIONS

A/A	Air-to-air
A/G	Air-to-ground
AC	(1) Advisory circular (2) Alternating current
ACM	Air combat maneuver
ACRL	Aircraft reference line
AERP	Alert eye reference position
AFSC	Air Force Systems Command
ALPHA	Angle-of-attack
ARP	Aerospace recommended practice
AS	Aerospace standard
ASL	Azimuth steering line
BETA	Angle-of-sideslip
BFL	Bombfall line
CA	Certification authority
CAS	Calibrated airspeed
CCIL	Continuously computed impact line
CCIP	Continuously computed impact point
CRT	Cathode ray tube
DC	Direct current
DCP	Display control panel
DERP	Design eye reference position
DH	Design handbook
DME	Distance measuring equipment
DOD	Department of Defence
EMI	Electromagnetic interference
ERP	Eye reference position
EU	Electronic unit
FAA	Federal Aviation Administration
FLIR	Forward looking infrared
FOV	Field-of-view
FRL	Fuselage reference line
GAMMA	Flight path angle
HDBK	Handbook
HUD	Head-up display
IAS	Indicated airspeed
IFOV	Instantaneous field of view
ILS	Instrument landing system
IMC	Instrument meteorological conditions
INS	Inertial navigation system
LOP	Line of position
LRU	Line replaceable unit
MACH	Mach number
MIL	Military specification/standard
MLS	Microwave landing system
MTBF	Mean time between failures
N/P	Non-precision
NVG	Night vision goggles
PDU	Pilot display unit
PFP	Potential flight path

PFR	Primary flight reference
PRE	Precision approach
PVSA	Primary visual signal area
RTCA	Radio Technical Committee for Aeronautics
SAE	Society of Automotive Engineers
STD	Standard
TACAN	Tactical air navigation (system)
TAS	True airspeed
TFOV	Total field of view
THETA	Aircraft pitch attitude
TOF	Time of flight
TOGA	Takeoff/go around
UA	Unusual attitude
UO	User organization
VFOV	Vertical field of view
VHF	Very high frequency
VMC	Visual meteorological conditions
VOR	VHF omnirange (navigation system)
VTOL	Vertical takeoff and landing

APPENDIX D: REFERENCES

A. Specifications/standards cited as references:

AFSC-DH-2-2	<u>CREW STATIONS AND PASSENGER ACCOMMODATIONS</u>
DOD-STD-2167	<u>DEFENSE SYSTEM SOFTWARE DEVELOPMENT</u>
FAA-AC- 21.303-1A	<u>CERTIFICATION PROCEDURES FOR PRODUCTS AND PARTS</u>
FAA-AC- 25.1309-1	<u>SYSTEM DESIGN ANALYSIS</u>
FAA-AC- 21.303-1A	<u>CRITERIA FOR APPROVAL OF CATEGORY III LANDING WEATHER MINIMA</u>
MIL-E-5400	<u>MILITARY SPECIFICATION: ELECTRONIC EQUIPMENT, GENERAL SPECIFICATION FOR</u>
MIL-W-5088H	<u>MILITARY SPECIFICATION: WIRING, AEROSPACE</u>
MIL-R-6771	<u>MILITARY SPECIFICATION: REFLECTOR, GUNSIGHT GLASS</u>
MIL-F-7513	<u>MILITARY SPECIFICATION: NOMENCLATURE ASSIGN- MENT, CONTRACTORS METHOD FOR OBTAINING</u>
MIL-F-8785C	<u>MILITARY SPECIFICATION: FLYING QUALITIES OF PI- LOTED AIRPLANES</u>
MIL-P-15024	<u>MILITARY SPECIFICATION: PLATE, IDENTIFICATION</u>
MIL-M-18012	<u>MILITARY SPECIFICATION: MARKING FOR AIRCREW STATION DISPLAYS, DESIGN CONFIGURATION OF</u>
MIL-D-87213	<u>MILITARY SPECIFICATION: DISPLAYS, AIRBORNE, ELECTRONICALLY/OPTICALLY GENERATED</u>
MIL-HDBK-217D	<u>MILITARY HANDBOOK: RELIABILITY STRESS AND FAIL- URE RATE DATA FOR ELECTRONIC EQUIPMENT</u>
MIL-STD-411D	<u>MILITARY STANDARD: AIRCREW STATION SIGNALS</u>
MIL-STD-704	<u>MILITARY STANDARD: AIRCRAFT ELECTRICAL POWER CHARACTERISTICS</u>
MIL-STD-882C	<u>MILITARY STANDARD: SYSTEM SAFETY PROGRAM RE- QUIREMENTS</u>

MIL-STD-1333A MILITARY STANDARD: AIRCREW STATION GEOMETRY FOR MILITARY AIRCRAFT

MIL-STD-1472 MILITARY STANDARD: HUMAN ENGINEERING DESIGN CRITERIA FOR MILITARY SYSTEMS, EQUIPMENT, AND FACILITIES

MIL-STD-1787 MILITARY STANDARD: AIRCRAFT DISPLAY SYMBOLOGY

RTCA/DO-160A ENVIRONMENTAL AND TEST PROCEDURES FOR AIRBORNE EQUIPMENT

RTCA/DO-178 SOFTWARE CONSIDERATIONS IN AIRBORNE SYSTEMS AND EQUIPMENT CERTIFICATION

SAE-ARP-268F AEROSPACE RECOMMENDED PRACTICE: LOCATION AND ACTUATION OF FLIGHT DECK CONTROLS FOR COMMERCIAL TRANSPORT TYPE AIRCRAFT

SAE-AS-425C AEROSPACE STANDARD: NOMENCLATURE AND ABBREVIATIONS FOR USE ON THE FLIGHT DECK

B. HUD/Electronic Display Specifications/Standards:

MIL-D-81641AS MILITARY SPECIFICATION: DISPLAY, HEAD-UP, GENERAL SPECIFICATION FOR

MIL-D-87213 MILITARY SPECIFICATION: DISPLAYS, AIRBORNE, ELECTRONICALLY/OPTICALLY GENERATED

MIL-STD-203F MILITARY STANDARD: AIRCREW STATION CONTROLS AND DISPLAYS FOR FIXED WING AIRCRAFT

MIL-STD-884C MILITARY STANDARD: ELECTRONICALLY OR OPTICALLY GENERATED DISPLAYS FOR AIRCRAFT CONTROL OR COMBAT CUE INFORMATION

MIL-STD-1787 MILITARY STANDARD: AIRCRAFT DISPLAY SYMBOLOGY

SAE-ARP-4053 AEROSPACE RECOMMENDED PRACTICE: FLIGHT DECK, HEAD-UP DISPLAYS, Vol. 2, Annex 8

SAE-AS-8034 AEROSPACE STANDARD: MINIMUM PERFORMANCE STANDARDS FOR AIRBORNE MULTIPURPOSE ELECTRONIC DISPLAYS

FAA-Draft-AC (7 Feb 84) PILOT EVALUATION FACTORS FOR ELECTRONIC FLIGHT INSTRUMENT SYSTEMS

FAA-Draft-AC (7 Jun 85) DISPLAY FACTORS FOR ELECTRONIC FLIGHT INSTRUMENT SYSTEMS USING COLOR CRT DISPLAYS

FAA-Draft-AC CRITERIA FOR OPERATIONS AND AIRWORTHINESS AP-
(no date) PROVAL OF HEAD-UP DISPLAYS (HUD) FOR AIR CAR-
 RIER AIRCRAFT

C. Reviews of HUD specifications:

J. F. Barnette, ROLE OF HEAD-UP DISPLAY IN INSTRUMENT FLIGHT,
USIFC-LR-76-2, August 1976

D. E. Egan and J. E. Goodson, HUMAN FACTORS ENGINEERING FOR
HEAD-UP DISPLAYS: A REVIEW OF MILITARY SPECIFICATIONS AND
RECOMMENDATIONS FOR RESEARCH, NAMRL Monograph-23, April 1978

L. H. Frank, COMPARISON OF SPECIFICATIONS FOR HEAD-UP DIS-
PLAYS IN THE NAVY A-4M, A-7E, AV-8A, AND F-14A AIRCRAFT,
NAMRL-SR-79-6, November 1979; AD-A080047

R. S. Kane, STUDY AND ANALYSIS OF REQUIREMENTS FOR HEAD-UP
DISPLAY (HUD), NASA CR-66912, March 1970

J. M. Ketchel and L. L. Jenney, ELECTRONIC AND OPTICALLY GEN-
ERATED AIRCRAFT DISPLAYS, JANAIR Report 680505, May 1968

W. L. Martin (ed.), OPTICAL AND HUMAN PERFORMANCE EVALUATION
OF HUD SYSTEMS DESIGN, AFAMRL-TR-83-95, December 1983

R. L. Newman, OPERATIONAL PROBLEMS ASSOCIATED WITH HEAD-UP
DISPLAYS DURING INSTRUMENT FLIGHT, AFAMRL-TR-80-116, October
1980

R. L. Newman and T. G. Foxworth, A REVIEW OF HEAD-UP DISPLAY
SPECIFICATIONS, Crew Systems TR-84-04, Final Report on Con-
tract F33615-83-C-5124, April 1984

E. W. Opittek, HEAD-UP DISPLAY STUDY, AFAL-TR-73-215, July
1973

W. P. Orrick and P. E. York, HEAD-UP DISPLAY SYMBOLOGY, NADC-
75267-40, December 1975

R. Warren, L. V. Genco, and T. R. Connon, HORIZONTAL DIPLOPIA
THRESHOLDS FOR HEAD-UP DISPLAYS, AFAMRL-TR-84-18, April 1984

HEAD-UP DISPLAY SYMBOLOGY AND MECHANIZATION STUDY, Midwest
Systems Research Report, Final Report on Contract F33615-83-
C-5125, March 1984

APPENDIX E: HUD BIBLIOGRAPHY

The bibliography is intended to assist the HUD engineer in reviewing the state-of-the-art as well as in obtaining some historical perspective of HUDs. The references are listed on a year-by-year basis and are ordered alphabetically by author within each each year. References with no personal author follow on a year-by-year basis. References for which no publication date are available are grouped at the end.

References

- 1 W. F. Grether, DISCUSSION OF PICTORIAL VERSUS SYMBOLIC AIRCRAFT INSTRUMENT DISPLAYS, Air Material Command TSEAA-694-88, 1947
- 2 G. W. Hover, "Pictorial versus Symbolic Indication," SKYWAYS, January 1954, pp. 17, 39-40
- 3 E. S. Calvert, VISUAL AIDS AND THEIR EFFECT ON LANDING SUCCESS AND SAFETY, RAE EL1486, October 1955
- 4 J. C. Lane and R. W. Cumming, THE ROLE OF VISUAL CUES IN FINAL APPROACH TO LANDING, Aeronautical research Laboratories (Australia) HEN-1, May 1955
- 5 L. C. Bentley and J. M. Naish, MEANS FOR DISPLAYING NAVIGATIONAL INFORMATION TO THE PILOT OF AN AIRPLANE, British Patent 891,255, July 1959
- 6 M. C. Burrett, TECHNICAL DESCRIPTION OF THE PILOT'S DISPLAY PROJECTOR TO BE USED IN THE BELL H-40 HELICOPTER, North American Autonetics EM-5773, May 1959
- 7 R. E. Johnson, PILOT'S OPTICAL DISPLAY DEVICE, Link TR-59-22, December 1959
- 8 J. C. Lane and R. W. Cumming, PILOT OPINIONS AND PRACTICES ON THE APPROACH TO LANDING: A QUESTIONNAIRE SURVEY AMONG AUSTRALIAN CIVIL AND MILITARY PILOTS, Aeronautical Research Laboratories (Australia) HER-1, April 1959
- 9 P. R. Ramage, "Simplifying the Pilot's Task," AIRPLANE AND ASTRONAUTICS, 416, October 1959
- 10 "Optical Display Adds Visual Cues to Instrument Data," BUSINESS AND COMMERCIAL AVIATION, June 1959
- 11 A. M. A. Majenda, "The Para-Visual Director," JOURNAL OF THE INSTITUTE OF NAVIGATION, 18, 1960, 447-454

- 12 J. M. Naish, SIMULATION OF VISUAL FLIGHT WITH PARTICULAR REFERENCE TO STUDY OF FLIGHT INSTRUMENTS, RAE CP-21663, 1960
- 13 J. M. Naish, SYSTEM FOR PRESENTING STEERING INFORMATION DURING VISUAL FLIGHT. PART I, THE POSITION OF THE PRESENTED INFORMATION, RAE TN-IAP-1132, October 1961
- 14 "Head-Up Flight Information Display and Visual Flight Simulator," AIRCRAFT ENGINEERING, January 1961, p. 22
- 15 J. R. Baxter and J. D. Workman, REVIEW OF PROJECTED DISPLAYS OF FLIGHT INFORMATION, Aeronautical Research Laboratories (Australia) HER-2, August 1962
- 16 D. M. Havron, INFORMATION AVAILABLE FROM NATURAL CUES DURING FINAL APPROACH AND LANDING, Human Sciences Research Report 421-5R, March 1962
- 17 P. J. Klass, "New Blind Landing Aid is Demonstrated," AVIATION WEEK, September 10, 1962, p. 144
- 18 T. McLane and E. F. Potter, DEVELOPMENT OF AN ADVANCED APPROACH AND LANDING DISPLAY, Sperry Gyroscope CA-1245-0206, August 1962
- 19 J. M. Naish, SYSTEM FOR PRESENTING STEERING INFORMATION DURING VISUAL FLIGHT. PART II, THE FORM OF THE PRESENTATION, RAE TN-IAP-1138, February 1962
- 20 J. M. Naish, "Cockpit Displays and the Possible Application of a Collimated Head-Up Display," SYMPOSIUM ON AIRCRAFT TAKEOFF AND LANDING PROBLEMS, December 1962
- 21 J. R. Baxter, PROJECTED SYMBOLIC DISPLAYS FOR GENERAL AIRCRAFT, Aeronautical Research Laboratories (Australia) HER-14, March 1963
- 22 J. R. Baxter, "Projected Symbolic Display -- Its Application to All Weather Landing," 15th IATA TECHNICAL CONFERENCE, LUCERNE, April 1963; WP-18
- 23 E. H. Fritze, "Flight Director, Comparator Monitor, And Automatic Flight Control Guidance Development for All-Weather Operations," 15th IATA TECHNICAL CONFERENCE, LUCERNE, April 1963; WP-17
- 24 V. E. Hamilton and J. A. Benson, "A Commentary on the Problems of Optical Presentation in Aircraft Cockpits," 15th IATA TECHNICAL CONFERENCE, LUCERNE, April 1963; WP-108
- 25 J. Long, E. Martino, and C. Fragola, "Sperry Windshield Display System -- A Major Advance in Aircraft Cockpits," 15th IATA TECHNICAL CONFERENCE, LUCERNE, April 1963

- 26 P. F. Mooney, "Optically Projected Cockpit Display for All-Weather Commercial Operations," 15th IATA TECHNICAL CONFERENCE, LUCERNE, April 1963; WP-88
- 27 J. M. Naish, "Properties of a Head-Up Display Relevant to Approach and Landing," 15th IATA TECHNICAL CONFERENCE, LUCERNE, April 1963; WP-106
- 28 M. G. Pfeiffer, W. C. Clark, and J. W. Danaher, THE PILOT'S VISUAL DISPLAY REQUIREMENTS, NATRADEVCON TR-783-1, March 1963
- 29 W. E. Ramsey and T. S. Momiyama, FLIGHT TEST AND EVALUATION OF THE SPERRY HEAD-UP DISPLAY INSTALLED IN AN F-11A (F11F-1) AIRPLANE, NATC FT-2211-15R-63, August 1963
- 30 R. A. Behan, et al., PILOT ACCEPTANCE FACTORS RELATED TO INFORMATION REQUIREMENTS AND DISPLAY CONCEPTS FOR ALL-WEATHER LANDING, NASA CR-189, 1964
- 31 L. Collins, "Bendix Microvision," AIR FACTS, September 1964
- 32 T. Gold, FLIGHT CONTROL SYSTEM, US Patent 3,128,623, April 1964
- 33 T. Gold, "Quickened Manual Flight Control with External Visual Guidance," IEEE TRANSACTIONS ON AEROSPACE AND NAVIGATIONAL ELECTRONICS, September 1964, pp. 151-156
- 34 K. J. Holden, "Instrument Displays for Blind Flying," JOURNAL OF THE ROYAL AERONAUTICAL SOCIETY, 68, 1964, 834-836
- 35 R. K. Johnson and T. S. Momiyama, FLIGHT TEST AND EVALUATION OF THE SPECTOCOM HEAD-UP DISPLAY INSTALLED IN AN A-5A AIRPLANE, NATC FT-2222-65R-64, December 1964
- 36 M. Lambert, "Head-Up Over the Hills," FLIGHT INTERNATIONAL, 22 October 1964, pp. 709-713
- 37 C. H. Mattinson, "Formation Flying with Microvision," US ARMY AVIATION DIGEST, December 1964, pp. 8-9
- 38 J. M. Naish, SYSTEM FOR PRESENTING STEERING INFORMATION DURING VISUAL FLIGHT. PART III, THE INFLUENCE OF ERRORS AND LIMITATIONS, RAE TR-64026, October 1964
- 39 J. M. Naish, "Combination of Information in Superimposed Visual Fields," NATURE, 202, 1964, 641-646
- 40 J. M. Naish, "The Flight Simulator in Display Research," JOURNAL OF THE ROYAL AERONAUTICAL SOCIETY, 68, 1964, 653-659

- 41 P. A. Noxon, STATUS REPORT ON THE DEVELOPMENT OF MICROVISION, SAE Paper 847B, April 1964
- 42 O. Sviden, FLIGHT DYNAMICS MODEL FOR SIMULATOR EXPERIMENTS WITH HEAD-UP DISPLAYS, SAAB YK-37-64.B7, 1964
- 43 O. Sviden, SYMBOLS AND CONTROL LAWS FOR THE POLE TRACK HEAD-UP DISPLAY, SAAB YK-37-64.B8, 1964
- 44 A. J. Benson, "Spatial Disorientation in Flight," in A TEXTBOOK OF AVIATION PHYSIOLOGY, J. A. Gillies (ed.), London: Pergamon Press. 1965. pp. 1086-1129
- 45 B. Bergstrom, MULTI-TASK PERFORMANCE IN SIMULATED FLIGHTS WITH A HEAD-UP DISPLAY, SAAB YK-37-65.R1, 1965
- 46 W. L. Carel, PICTORIAL DISPLAYS FOR FLIGHT, Hughes TR-2732-01/40, December 1965
- 47 R. F. Gabriel, L. R. Uyeda, and A. A. Burroughs, AN INVESTIGATION OF LIGHTING IN DISPLAYS WITH SUPERIMPOSED FIELDS AT LOW LEVELS OF ILLUMINATION, Douglas Aircraft AD-613344, February 1965
- 48 T. Gold and J. D. Workman, "Research in the Application of Windshield Projection Displays to the All-Weather Landing Task," JOURNAL OF AIRCRAFT, 2, 1965, 328-336
- 49 C. R. Kelley, J. M. Ketchell, and P. H. Strudwick, EXPERIMENTAL EVALUATION OF HEAD-UP DISPLAY HIGH BRIGHTNESS REQUIREMENTS, Kaiser TR-HFR-9765-1, November 1965
- 50 J. M. Naish, "Display Research and its Application to Civil Aircraft," JOURNAL OF THE ROYAL AERONAUTICAL SOCIETY, 69, 1965, 662-669
- 51 J. M. Naish and R. Shiel, FLIGHT TRIALS OF HEADS-UP DISPLAY (HUD) IN METEOR AND HUNTER AIRCRAFT, RAE TR-65254, November 1965
- 52 L. Nordstrom, EYE LEVEL FLIGHT INFORMATION BY A PERSPECTIVE POLE-TRACK, SAAB TN-58, 1965
- 53 P. A. Noxon, "Microvision: A Universal All-Weather Landing, Station Keeping and Navigational System," JOURNAL OF THE AMERICAN HELICOPTER SOCIETY, January 1965
- 54 C. R. Reede, "KLM - Studies Betreffende de Landing van Vliegtuigen bij Lage Weerslimieten," DE INEGNIEUR, 77, November 1965, 1-13
- 55 T. C. D. Whiteside, "Accommodation and Eye Movements," in A TEXTBOOK OF AVIATION PHYSIOLOGY, J. A. Gillies (ed.), London: Pergamon Press. 1965. pp. 1014-1020

- 56 "Pilot Reaction to Sperry Display Assessed," AVIATION WEEK, August 9, 1965, pp. 115-117
- 57 "Symposium on Displays," JOURNAL OF THE ROYAL AERONAUTICAL SOCIETY, 69, 1965, 651-669
- 58 B. Bergstrom, "Interpretability of Symbols in a Head-Up Display," 6TH CONFERENCE, WESTERN EUROPEAN ASSOCIATION FOR AVIATION PSYCHOLOGY, THE HAGUE, 1966
- 59 J. G. Curtin and J. H. Emery, A HELICOPTER FLIGHT EVALUATION OF A HEAD-UP DISPLAY, JANAIR TR-D228-420-010, February 1966
- 60 J. G. Fox, I. Ferguson, and I. D. C. Andrew, AN ANNOTATED BIBLIOGRAPHY ON PRESENTATION OF INFORMATION IN AIRCRAFT COCKPITS, UK Ministry of Aviation Report, March 1966
- 61 D. E. Fry, K. Burdin, and M. R. Green, THE DESIGN AND FLIGHT TESTING OF A TAKE-OFF AND OVERSHOOT DIRECTOR, RAE TR-66083, March 1966
- 62 G. Klopffstein, "Rational Study of Aircraft Piloting," INTRADOS, ca. 1966; reprint supplied by Thomson-CSF
- 63 J. C. Morrall, PILOT'S SAFETY PROBLEM IN CATEGORY 2 OPERATIONS AND POTENTIAL CONTRIBUTION OF HEAD-UP DISPLAYS, RAE TR-66195, 1966
- 64 J. C. Morrall, THE ROLE OF THE PILOT IN ALL-WEATHER OPERATIONS, RAE TM-BLEU-123, 1966
- 65 S. N. Roscoe, S. G. Hasler, and D. J. Dougherty, "Flight by Telescope: Making Takeoffs and Landings; The Influence of Image Magnification; Practice: and Various Conditions of Flight," HUMAN FACTORS, 8, 1966, 13-40
- 66 R. P. Snodgrass, "On-the-Windshield Displays Improve Flight Control" CONTROL ENGINEERING, 13, January 1966, 61-66
- 67 R. M. Tamura, "A Consideration of Visual Cues Used in Landing," AEROSPACE MEDICAL ASSOCIATION CONFERENCE, LAS VEGAS, 1966
- 68 HEAD-UP DISPLAY SYSTEM, Bendix Brochure, 1966
- 69 R. H. Beck, "The Revival of the 'One Man Band'," AIR LINE PILOT, June 1967, pp. 7-21
- 70 R. A. Behan and F. A. Siciliani, "Landing Task and Pilot Acceptance of Displays," JOURNAL OF AIRCRAFT, 4, 1967, 141-145
- 71 B. Bergstrom, INTERPRETABILITY STUDIES OF ELECTRONIC FLIGHT INSTRUMENTS, SAAB TN-61, 1967

- 72 K. L. Burroughs, L-193 HEAD-UP DISPLAY AND CONCORDE SST, ALPA Report, November 1967
- 73 T. J. Harris, et al., HOLOGRAPHIC HEAD-UP DISPLAY, IBM AD-825633, December 1967
- 74 S. Kne Meyer and G. L. Yingling, "Results of the USAF Pilot Factors Program as They Apply to Flight Safety," 12TH ANNUAL FLIGHT SAFETY FOUNDATION BUSINESS AIRCRAFT SAFETY SEMINAR, WASHINGTON, May 1967
- 75 J. M. Naish, "Factors Affecting Head-Up Display Design," 8th ANNUAL SYMPOSIUM ON HUMAN FACTORS IN ELECTRONICS, PALO ALTO, May 1967
- 76 S. M. Soliday and J. R. Milligan, SIMULATION OF LOW ALTITUDE HIGH SPEED MISSION PERFORMANCE, North American SEG-TR-66-67, 1967
- 77 C. L. Stout and J. M. Naish, "Total System Concept for Category III Operations," PROCEEDINGS SOCIETY OF EXPERIMENTAL TEST PILOTS SYMPOSIUM, BEVERLY HILLS, September 1967
- 78 C. L. Tipton, APPLICATION OF MAN-MACHINE EQUALIZATION TECHNIQUES, NRL AD-648301, January 1967
- 79 R. M. Walchli, HEAD-UP DISPLAY REVIEW, Bunker-Ramo FO44-7U1, July 1967
- 80 L. Wallis, BALPA VISIT TO BLEU ON 25th SEPTEMBER 1967 -- HEAD-UP DISPLAY, BALPA 8-TEC-2/2/5, October 1967
- 81 F. M. Wilson, JET TRANSPORT DESIGN CONSIDERATIONS FOR CATEGORY III ALL-WEATHER LANDING SYSTEMS, SAE Paper, October 1967
- 82 "Head-Up Unit Tried in Category 3 System," AVIATION WEEK, June 26, 1967, pp. 60-70
- 83 PROCUREMENT SPECIFICATIONS FOR DISPLAY SET, PILOT HEAD-UP FOR A A-7D/E AIRPLANE, Vought Specification 204-16-19C, March 1967
- 84 R. H. Beck, "A Condensed Summary of the Case for a Head-Up Display," 15TH ALPA AIR SAFETY FORUM, July 1968
- 85 R. H. Beck, "The Hostile Environment of Low Visibility," AIR LINE PILOT, November 1968, pp. 4-19
- 86 P. Cane, "Head-Up Display for the Airlines," SHELL AVIATION NEWS, 363, 1968. 16-19

- 87 J. H. Crenshaw, "A-7D/E Avionics System," 20th NATIONAL AEROSPACE ELECTRONICS CONFERENCE, May 1968
- 88 J. DeBotton, "Human Factors Evaluation of Head-Up Display and Flight Performance by Photography and Data Reduction Methods," HUMAN FACTORS, 10, 1968. 11-52
- 89 K. H. De Jong, CURRENT STATE OF DEVELOPMENT OF ALL-WEATHER LANDING, Luftfahrttechnik Raumfahrttechnik Report, 1968
- 90 F. E. D. Dekker, "Head-Up Display Symbology," PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 91 P. J. Deliac, "A Collimator for Head-Up Display Piloting (CSF-193)," PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 92 J. H. Glover, VISUAL FLIGHT LANDING APPROACH AID, Boeing D6-23712TN, October 1968
- 93 T. Gold and C. A. Deutschle, FLIGHT SIMULATION STUDY OF HEAD-UP DISPLAYS FOR HIGH-SPEED FLIGHT AT LOW ALTITUDE, Sperry SGD-4277-0190, December 1968
- 94 A. Hyman and T. Gold, "Dynamic Visual Cues in Flying," CURRENT DEVELOPMENTS IN OPTICS AND VISION, Washington: NAS-NRC, 1968, pp. 3-21
- 95 D. Johnson and R. W. Jones, "The Head-Up Display of Approach Information," PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 96 M. J. Jullien, "Elaboration et Presentation d'Information d'Aide a l'Atterrissage," PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 97 J. M. Ketchell and L. L. Jenney, ELECTRONIC AND OPTICALLY GENERATED AIRCRAFT DISPLAYS: A STUDY OF STANDARDIZATION REQUIREMENTS, JANAIR TR-680505, May 1968
- 98 R. Lami, PILOT DEMAND NEW FLIGHT CONTROL INSTRUMENTS, IFALPA L68C20, 1968
- 99 G. B. Litchford, "The Low Visibility Landing. Part I: 1200 RVR," ASTRONAUTICS AND AERONAUTICS, November 1968, pp. 26-38
- 100 G. B. Litchford, "The Low Visibility Landing. Part II: The Systems Challenge," ASTRONAUTICS AND AERONAUTICS, December 1968, pp. 44-56
- 101 P. Lowry, "The Impact of Electronic Displays on Aircraft Control," ADVANCED CONTROL SYSTEM CONCEPTS, AGARD CP-58, September 1968

- 102 R. Monroe, D. Vreuls, and C. A. Semple, SUMMARY OF ALL WEATHER LANDING SIMULATION STUDIES, FAA RD-68-13, 1968
- 103 J. M. Naish, PROPERTIES AND DESIGN OF THE HEAD-UP DISPLAY, Douglas DP-4951, April 1968; McDonnell Douglas J1409, February 1970
- 104 N. Penney, "Safety Aspects of HUD," FLIGHT SAFETY, December 1968
- 105 O. B. St. John, "All-Weather Landing," SHELL AVIATION NEWS, 364, 1968, 2-11
- 106 W. C. Schultz, "Problems of Information Transfer in the Modern Jet Cockpit," PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 107 W. C. Schultz, PROBLEMS OF INFORMATION TRANSFER IN THE MODERN JET COCKPIT, Cornell Aeronautical Laboratory CAL-IH-2235-B-1, December 1968
- 108 G. Schweizer and W. Bollinger, "Some Aspects of the Display Configuration of Modern Aircraft," PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 109 C. L. Stout, "Recent Developments in Head-Up Display Systems," 15th ALPA AIR SAFETY FORUM, July 1968
- 110 F. L. Wallace, "Head-Up Displays ... Some Unanswered Questions," 15th ALPA AIR SAFETY FORUM, July 1968
- 111 D. J. Walters, "The Electronic Display of Primary Flight Data," PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 112 B. S. Wolfe and G. R. Sleight, "When Will Head-Up Go Civil?", FLIGHT INTERNATIONAL, 26 December 1968, pp. 1064-1065
- 113 PROBLEMS OF THE COCKPIT ENVIRONMENT, AGARD CP-55, November 1968
- 114 15th ALPA AIR SAFETY FORUM, ALPA, July 1968
- 115 A COMPARISON OF "ELECTRONIC WORLD" AND "FLIGHT DIRECTOR WORLD" HEAD-UP DISPLAY: THEIR INSTALLATION AND PHILOSOPHY, Elliott Brothers ADD-229, April 1968
- 116 OPERATIONAL AND TECHNICAL DESCRIPTION OF LIBRASCOPE MODEL L-193 HEAD-UP DISPLAY (HUD) SYSTEM, General Precision, July 1968
- 117 FLIGHT SIMULATION INVESTIGATION OF HEAD-UP DISPLAY FOR LOW ALTITUDE HIGH-SPEED MISSION, USAF: ASD TR-68-5, March 1968

- 118 HEAD-UP DISPLAY, USAF: AFFDL Fact Sheet FS-68-28, 1968
- 119 D. B. Armstrong, THE VALUE OF A HEAD-UP DISPLAY WHEN LANDING A LARGE AIRCRAFT, RAE TR-69236, October 1969
- 120 H. Becker, A NEW GENERATION OF VISUAL FLIGHT CONTROL DISPLAYS, Luftfahrttechnik Raumfahrttechnik Report, December 1969
- 121 J. Bentley, B. F. McLead, and J. Wilson, "Automatic Landing," FLIGHT INTERNATIONAL, 31 October 1969, pp. 670-676
- 122 N. C. Ellis and A. M. Ray, "A Simulator Study of the A-7 Head-Up Display in Aircraft Weapons Delivery," HUMAN FACTORS SOCIETY ANNUAL MEETING, October 1969
- 123 H. G. Gaidrich, W. H. Dana, and R. C. McCracken, EVALUATION OF AN INDIRECT VIEWING SYSTEM FOR LIFTING-BODY TERMINAL AREA NAVIGATION AND LANDING TASKS, NASA TN-D-5299, July 1969
- 124 T. Gold and E. F. Potter, "Visual Suitability -- A Primary Factor in Head-Up Displays," SPERRY RAND ENGINEERING REVIEW, January 1969, pp. 37-43
- 125 B. J. Greenland, "A Simple Head-Up Display for Civil Aircraft," ELECTRONIC ENGINEERING ASSOCIATION AND MINISTRY OF TECHNOLOGY SYMPOSIUM (UK), September 1969
- 126 C. L. Kraft and C. L. Elworth, "Night Visual Approaches," AIR LINE PILOT, June 1969, pp. 20-22
- 127 F. P. Martin, V/STOL HEAD-UP DISPLAY WORK AT ROYAL AIRCRAFT ESTABLISHMENT, Farnborough, RAE ONRL-M-4-69, March 1969
- 128 B. Miller, "Head-Up Display Aids All-Weather Landings," AVIATION WEEK, January 13, 1969, pp. 92-94
- 129 J. M. Naish and M. F. Von Wieser, "Human Factors in the All-Weather Approach," SHELL AVIATION NEWS, 374, 1969, 2-11
- 130 E. F. Potter, et al., HEAD-UP DISPLAY SET AN/AVQ-15(V), ASD TR-69-110, 1969
- 131 J. M. Rolfe, "Human Factors and the Display of Height Information," APPLIED ERGONOMICS, 1, 1969, 16-24
- 132 J. G. Ryan, RESULTS OF THE F-14A HUD SYMBOLOGY SIMULATION, NADC SD-6940, June 1969
- 133 O. B. St. John, "All Weather Landing," AIRCRAFT LANDING SYSTEMS, AGARD CP-59, May 1969
- 134 W. T. Singleton, "Display Design: Principles and Procedures," ERGONOMICS, 12, 1969, 519-531

- 135 G. R. Sleight and C. J. G. Lewis, PRACTICAL EXPERIENCE WITH ELECTRONIC HEAD-UP DISPLAYS IN TRANSPORT AIRCRAFT, Elliott 29/11/2/BO5, September 1969
- 136 M. E. Stormo, "Recent Developments in Low-Cost Head-Up Displays," 14th ANNUAL FLIGHT SAFETY FOUNDATION BUSINESS AIRCRAFT SAFETY SEMINAR, WASHINGTON, May 1969
- 137 16th ALPA AIR SAFETY FORUM, ALPA, July 1969
- 138 "The Growing Need for Head-Up Displays," INTERAVIA, May 1969
- 139 80 SERIES HEAD-UP DISPLAY FITTED TO MCDONNELL-DOUGLAS DC-9-20, Marconi-Elliott, January 1969
- 140 HEAD-UP DISPLAY, AFFDL Fact Sheet FS-69-58, 1969
- 141 HEAD-UP DISPLAY, AFFDL Fact Sheet FS-69-59, 1969
- 142 HEAD-UP DISPLAY, AFFDL Fact Sheet FS-69-60, 1969
- 143 HEAD-UP DISPLAY, AFFDL Fact Sheet FS-69-62, 1969
- 144 R. H. Beck, THE MEN, THE MACHINE, AND THE APPROACH, ALPA Report, 1970
- 145 M. E. Benjamin, "F-14 Uses Digital Display Method," AVIATION WEEK, July 1, 1970, pp. 45-46
- 146 M. J. Cassano and W. F. Swartz, A PROGRAM FOR STUDY AND IN-FLIGHT INVESTIGATION OF THE ROLE OF HEAD-UP DISPLAYS IN THE SEE-TO-LAND CONCEPT, Bunker-Ramo Report, June 1970
- 147 J. L. DeCelles, E. J. Burke, and K. L. Burroughs, "The Fail-Safe Landing," 17th ALPA AIR SAFETY FORUM, July 1970
- 148 W. B. Gartner and K. M. Baldwin, IMPROVED DISPLAY SUPPORT FOR MANAGEMENT DURING A SIMULATOR EVALUATION OF AN ILS-INDEPENDENT RUNWAY PERSPECTIVE DISPLAY, NASA CR-73495, November 1970
- 149 T. Gold and A. Hyman, VISUAL REQUIREMENTS STUDY FOR HEAD-UP DISPLAYS, JANAIR 680712, March 1970
- 150 T. J. Harris, et al., HOLOGRAPHIC HEAD-UP DISPLAY, IBM AD-703683, March 1970
- 151 H. H. Hasselgring, A SURVEY OF SIGHTING AND AIMING DEVICES, NAFI TR-1557, July 1970
- 152 C. L. Hussey, EVALUATION OF A WIDE ANGLE HEAD-UP DISPLAY OPTICAL SYSTEM, NADC AM-7042, December 1970

- 153 R. S. Kane, STUDY AND ANALYSIS OF REQUIREMENTS FOR HEAD-UP DISPLAY (HUD), NASA CR-66912, March 1970
- 154 D. D. Korell and D. L. Schmidt, CRT DISPLAYS FOR BUSINESS AIRCRAFT, SAE Paper 700210, March 1970
- 155 R. Lami and R. H. Beck, SOLUTIONS TO PILOTING PROBLEMS BY MEANS OF HEAD-UP DISPLAYS FROM COLLIMATED INSTRUMENTS, ICAO AWOP-B10/16, August 1970
- 156 J. R. Lowe, FLIGHT PATH ANGLE DISPLAY STUDY, McDonnell-Douglas MDC-J0812, July 1970
- 157 G. F. Mussman, TECHNICAL REPORT FOR A-7 HEAD-UP DISPLAY AND AUDIO-VIDEO RECORDING SYSTEM, McDonnell-Douglas Report, November 1970
- 158 J. M. Naish, "Control Gains in Head-Up Presentation," PROCEEDINGS OF 6th ANNUAL CONFERENCE ON MANUAL CONTROL, WRIGHT-PATTERSON AFB, April 1970
- 159 J. M. Naish, FLIGHT TESTS OF THE HEAD-UP DISPLAY (HUD) IN DC-9-20, SHIP 382, McDonnell-Douglas MDC-J0878, 1970
- 160 "The Advantages of HUD," JOURNAL OF AIR TRAFFIC CONTROL, 12, 1970
- 161 TECHNICAL DESCRIPTION OF THE VISUAL LANDING SYSTEM, United Data Control 060-0483-001A, July 1970
- 162 VISUAL LANDING AID SYSTEM, USAF: AFFDL Fact Sheet FS-70-61, 1970
- 163 C. Arnoldy, "Cockpit Displays: Users versus Makers," INFORMATION DISPLAY, July/August 1971, pp. 27-36
- 164 A. J. Benson (ed.), THE DISORIENTATION INCIDENT, AGARD CP-95, 1971; AD-742496
- 165 K. T. Burnette, "The Status of Human Perceptual Characteristic Data for Electronic Flight Display Research," GUIDANCE AND CONTROL DISPLAYS, AGARD CP-96, October 1971
- 166 B. Caiger, "Review of Several Factors Relevant to Jet Upsets," LESSONS WITH EMPHASIS ON FLIGHT MECHANICS FROM OPERATING EXPERIENCE, INCIDENTS AND ACCIDENTS, AGARD CP-76, 1971
- 167 J. J. Carroll, "What the Pilot Sees During Instrument Approaches in Low-Visibility Conditions," 24th INTERNATIONAL AIR SAFETY SEMINAR, MEXICO CITY, Flight Safety Foundation, October 1971

- 168 J. W. Chappelow and J. M. Rolfe, DISPLAY OF INFORMATION IN THE AIRCRAFT COCKPIT, IEE Conference Publication 80, September 1971
- 169 T. G. Dobie, "The Disorientation Accidents -- Philosophy of Instrument Flying Training," THE DISORIENTATION INCIDENT, AGARD CP-95, 1971, Paper A15; AD-742496
- 170 N. Driscoll, "Avionics Integration -- The Pilot's Part," PROCEEDINGS 15TH SOCIETY OF EXPERIMENTAL TEST PILOTS SYMPOSIUM, Beverly Hills, September 1971
- 171 J. A. Fitzgerald, EVALUATION OF AN AIRBORNE AUDIO-VIDEO RECORDING SYSTEM FOR AIRCRAFT EQUIPPED WITH HUD, AFHRL TR-71-20, May 1971
- 172 J. A. Fitzgerald and D. L. Moulton, EVALUATION OF AIRBORNE AUDIO-VIDEO RECORDINGS AS A TOOL FOR TRAINING IN THE A-7D TACTICAL FIGHTER, AFHRL(FT) TR-72-55, October 1971
- 173 T. G. Foxworth and R. L. Newman, A PILOT'S LOOK AT AIRCRAFT INSTRUMENTATION, AlAA Paper 71-787, August 1971
- 174 U. Frieberg, "Basic About Scale One-to-One Head-Up Display," PROCEEDINGS 15th SOCIETY OF EXPERIMENTAL TEST PILOTS SYMPOSIUM, Beverly Hills, September 1971, pp. 77-85
- 175 R. A. Harlow, FLIGHT ASSESSMENT OF HEAD-UP DISPLAY AS A CLEAR WEATHER APPROACH AID, RAE TR-71141, July 1971
- 176 D. A. Hodgson, "Pilot Vision During Final Approach-and-Landing in Turbojet Transport Operations," AEROSPACE MEDICINE, 42, 1971, 205-208
- 177 D. O. Horning, et al., HEAD-UP DISPLAY STUDY, FAA RD-71-60, May 1971
- 178 P. Jainski, EINFLUSS DER BLENDUNG AUF DAS ERKENNEN ELEKTRONISCHER ANZEIGEN IN KANZELN MODERNER HOCHLEISTUNGSFLUGZEUGE KURZFASSUNG (The Effect of Dazzle on Electronic Display Visibility in Modern High Performance Aircraft Cockpits, A Summary), RAE Translation 1545, March 1971; original report from German Federal Ministry of Defense
- 179 L. L. Jenney, et al., HEAD-UP DISPLAYS: A STUDY OF THEIR APPLICABILITY IN CIVIL AVIATION, NASA CR-117135, January 1971
- 180 Larribiere and Lacombe, "Exploitation des Minima Catégorie IIIA a Air Inter" (Exploitation of Category IIIA Minima at Air Inter), COLLOQUIUM ON AERONAUTICAL METEOROLOGY, PARIS, May 1971, Paper 9

- 181 J. A. La Russia, "Multi-Purpose, Wide-Field, Three-Dimensional Head-Up Display for Aircraft," GUIDANCE AND CONTROL DISPLAYS, AGARD CP-96, October 1971
- 182 A. C. McTee, D. L. Carmack, and R. K. Taylor, HUD INVESTIGATION IN LOW VISIBILITY, IPIS 71-3, June 1971
- 183 J. M. Naish, "Information Transfer in All-Weather Operations," SHELL AVIATION NEWS, 396, 1971, 8-10
- 184 M. J. Ripley and T. E. Dobry, FLIGHT EVALUATION OF A WIDE FIELD-OF-VIEW HEAD-UP DISPLAY INSTALLED IN AN A-6A AIRPLANE, NATC WST-134R-71, August 1971
- 185 W. Russel, FROM AUTOMATIC LANDING TO CATEGORY III, SAE Paper 710441, May 1971
- 186 G. E. Skelton and R. L. Sulzer, PREVENTION OF AIRCRAFT LOSS-OF-CONTROL USING A SIMPLE HEAD-UP DISPLAY, FAA AD-726280, June 1971
- 187 J. H. Smith, "The Impact of Advancing Technology on the Evolution of Electronic Head-Up Display Systems," GUIDANCE AND CONTROL DISPLAYS, AGARD CP-96, October 1971
- 188 J. P. Sones, HEAD-UP DISPLAY SYSTEM IN MODERN AIRCRAFT, IEE Conference Publication 80, September 1971
- 189 L. E. Swartzendruber, et al., AN EXPERIMENTAL INVESTIGATION OF TWO LINEAR RATE-FIELD DISPLAYS, University of Illinois AD-726643, May 1971
- 190 R. K. Taylor and A. C. McTee, EVALUATION OF EXTERNALLY MOUNTED HEAD-UP DISPLAY (PCI), IPIS TR-72-2, August 1971
- 191 P. E. Tyler and P. A. Furr, "Disorientation, 'Fact and Fancy'," THE DISORIENTATION INCIDENT, AGARD CP-95, 1971, Paper A4; AD-742496
- 192 P. Yiotis, T. Gold, and W. Clark, STUDY OF HEAD-UP DISPLAYS FOR HELICOPTER/STOL AIRCRAFT, Sperry Rand AD-744334, March 1971
- 193 M. Zebrowski, "Studies of Perception of Information on the Spatial Position of an Aircraft," TECH. LOTNICZA I ASTRO-NAUTYCZNA (POLAND), 26, 1971, 35-37; NASA TM-75153
- 194 GUIDANCE AND CONTROL DISPLAYS, AGARD CP-96, October 1971
- 195 ENGINEERING REPORT, DELTA GAMMA VISUAL LANDING SYSTEM, Sundstrand Data Control 070-0676-001, June 1971
- 196 A-7D AIRBORNE VIDEO RECORDING SYSTEM (AVRS), USAF: TAC 1R-70A-113F, February 1971

- 197 W. L. Augustine, HEAD-UP DISPLAY AREA SURVEY, AFFDL TM-72-11-FGR, December 1972
- 198 M. Berjal, EXPERIMENTAL TESTING OF FLIGHT CONTROL HEAD-UP DISPLAYS, Air France Report, June 1972; NASA Translation TM-75205, January 1978
- 199 D. L. Carmack, LANDING WEATHER MINIMUMS INVESTIGATION, IPIS AD-747654, January 1972
- 200 B. M. Elson, "Visual Approach Monitor Being Certified," AVIATION WEEK, April 3, 1972
- 201 T. Gold and R. F. Perry, VISUAL REQUIREMENTS STUDY FOR HEAD-UP DISPLAYS, JANAIR 700407, March 1972
- 202 J. M. Naish, "Head-Up Display for the Visual Approach," PROCEEDINGS OF THE 8th ANNUAL CONFERENCE ON MANUAL CONTROL, ANN ARBOR, May 1972
- 203 J. M. Naish, "Application of the Head-Up Display (HUD) to a Commercial Jet Transport," JOURNAL OF AIRCRAFT, 9, 1972, 530-536
- 204 E. A. Palmer and F. W. Cronn, "Head-Up Displays for STOL Visual Approaches," NASA STOL TECHNOLOGY CONFERENCE, NASA SP-320, October 1972
- 205 E. A. Palmer, NIGHT VISUAL APPROACHES -- PILOT PERFORMANCE WITH AND WITHOUT A HEAD-UP DISPLAY, NASA TM-X-62188, October 1972
- 206 J. M. Reising and W. L. Augustine, EVALUATION OF THE THOMSON-CSF CV-91 AND OBSERVATION OF THE TC-121 DISPLAYS, AFFDL TM-72-9-FGR, October 1972
- 207 P. A. Roitsch, "Visual Approach Monitor," SHELL AVIATION NEWS, 411, 1972, 7-10
- 208 D. J. Sheehan, HEAD-UP DISPLAY WARNING REQUIREMENTS, Norden 1232-R-0006, August 1972
- 209 J. H. Smith, "The Evolution of Head-Up Displays," INTERAVIA, 27, 1972, 858-860
- 210 R. L. Therrien, "Head-Up Display -- A Pilot's Evaluation," 17th ANNUAL FLIGHT SAFETY FOUNDATION CORPORATE AIRCRAFT SAFETY SEMINAR, WASHINGTON, April 1972
- 211 R. L. Therrien, "NABTSCO and HUD," PROFESSIONAL PILOT, May 1972, pp. 27-29

- 212 M. F. Von Wieser, "Operating a Head-Up Display," SHELL AVIA-TION NEWS, 411, 1972, 14-19
- 213 J. W. Wilson, "Human Factors in Low Weather Operation of Transport Aircraft," AUTOMATION IN MANNED AEROSPACE SYSTEMS, AGARD CP-114, 1972
- 214 DISPLAYS FOR APPROACH AND LANDING OF V/STOL AIRCRAFT, AGARD AR-51, November 1972
- 215 "FAA Approves Heads-Up Landing Aid," AIRLINE MANAGEMENT, June 1972, p. 40
- 216 THE LOSS OF VISUAL CUES DURING LOW VISIBILITY LANDING, FAA AC-91-25A, June 1972
- 217 MILITARY SPECIFICATION: DISPLAY, HEAD-UP, GENERAL SPECIFICA-TION FOR, MIL-D-81641(AS), June 1972
- 218 THEORY OF OPERATION, VISUAL APPROACH MONITOR UTILIZING A VERTICAL GYRO AND PITOT-STATIC INPUTS, Sundstrand Data Con-trol 020-0026-001, July 1972
- 219 PROCEEDINGS OF A SYMPOSIUM ON VISUALLY COUPLED SYSTEMS, BROOKS AFB, AMD AD-916572, November 1972
- 220 MCDONNELL-DOUGLAS F-15 HEAD-UP DISPLAY, AFFDL Fact Sheet FS-72-67, 1972
- 221 FARRAND ULTRA-WIDE FIELD OF VIEW HEAD-UP DISPLAY, AFFDL Fact Sheet FS-72-68, 1972
- 222 A-7E NAV/WEAPON DELIVERY SYSTEM, Vought Report, June 1972
- 223 B. L. Alexander, ALL APPLICATIONS DIGITAL COMPUTER (AADC) FOR ADVANCED LIGHT ATTACK AIRCRAFT, AD-909841L, March 1973
- 224 J. T. Bear, TESTING THE A-7D, AFFTC TR-73-48, October 1973
- 225 K. Bourquin, et al., INITIAL FLIGHT AND SIMULATOR EVALUATION OF A HEAD-UP DISPLAY FOR STANDARD AND NOISE ABATEMENT VISUAL APPROACHES, NASA TM-X-82187, February 1973
- 226 A. D. Brown and S. B. Ginn, MANUAL APPROACH PERFORMANCE US-ING A SIMPLE AIRBORNE VASI HEAD-UP DISPLAY, RAE TR-73080, September 1973
- 227 A. R. Colgan, INTEGRATED COCKPIT DISPLAY SYSTEM, AFAL TR-73-50, January 1973
- 228 D. Cosley and R. Peal, SST TECHNOLOGY FOLLOW-ON PROGRAM: ASEDS-SST DESIGN DATA SUMMARY, FAA SS-73-25, October 1973; Boeing Number D6-60302

- 229 K. D. Cross and J. J. McGrath (eds.), CREW SYSTEM DESIGN, Santa Barbara: Anacapa Sciences, July 1973
- 230 W. B. DeBellis, FLIGHT INFORMATION SCALE TEST FOR HEADS-UP AND PANEL MOUNTED DISPLAYS, Aberdeen Proving Ground HEL-TM-22-73, October 1973
- 231 J. L. DeCelles, E. J. Burke, and K. Burroughs, "A Real World Situation Display for All-Weather Landing," CREW SYSTEM DESIGN, Santa Barbara: Anacapa Sciences, July 1973, pp. 255-263
- 232 T. G. Foxworth, "A NEW CONCEPT OF FLYING," FLYING THE TC-121 ALL-WEATHER HEAD-UP DISPLAY, IFALPA Report, November 1973
- 233 W. B. Gartner and K. M. Baldwin, SIMULATOR EVALUATION OF DISPLAY CONCEPTS FOR PILOT MONITORING AND CONTROL OF SPACE SHUTTLE APPROACH AND LANDING. PHASE II: MANUAL FLIGHT CONTROL, NASA CR-2359, December 1973
- 234 R. L. Harris and D. E. Hewes, AN EXPLORATORY SIMULATION STUDY OF A HEAD-UP DISPLAY FOR GENERAL AVIATION LIGHTPLANES, NASA TN-D-7456, 1973
- 235 F. C. Hoerner, "V/STOL Terminal Guidance Head-Up Displays: A Real World Evaluation," CREW SYSTEM DESIGN, Santa Barbara: Anacapa Sciences, July 1973, pp. 273-274
- 236 F. C. Hoerner, VSTOL TERMINAL GUIDANCE HEAD-UP DISPLAYS, SAE Paper 730951, October 1973
- 237 St. J. McCloskey, FLYING THE TC-121, A VISIT TO BRETIGNY TO FLY THE THOMSON-CSF HEAD-UP DISPLAY, IFALPA 74C95, October 1973
- 238 I. L. McGrath, TRIDENT ALL WEATHER OPERATIONS, British European Airlines Report, June 1973
- 239 R. Mackie, "The Jet Turbine Aircraft in the Canadian Arctic," SYMPOSIUM ON AIRCRAFT OPERATIONS IN THE CANADIAN ARCTIC, EDMONTON, May 1973
- 240 J. M. Naish, "A Conformal Head-Up Display for the Visual Approach," PROCEEDINGS OF THE 9th ANNUAL CONFERENCE ON MANUAL CONTROL, CAMBRIDGE, May 1973
- 241 M. L. Odle, T-38 VISUAL LANDING STUDY, AFIFC TR-73-7, August 1973
- 242 E. W. Opittek, HEAD-UP DISPLAY STUDY, AFAL TR-73-215, February 1973

- 243 D. P. Parks, et al., DEVELOPMENT OF AN INDEPENDENT ALTITUDE MONITOR CONCEPT, FAA RD-73-168, September 1973; Boeing D6-41293
- 244 J. E. Tucker, PRELIMINARY INVESTIGATION OF A HEADS-UP DISPLAY FOR THE APPROACH AND LANDING PHASE FOR A V/STOL AIRCRAFT USING A FIXED BASE SIMULATOR, AD-913524L, June 1973
- 245 J.-C. L. Wanner, "Piloting Techniques and Flying Qualities of the Next Generation of Aircraft," AERONAUTICAL JOURNAL, 77, 1973, 593-605
- 246 V. Wilckens, "Improvements in Pilot/Aircraft Integration by Advanced Contact Analog Displays," PROCEEDINGS OF THE 9th ANNUAL CONFERENCE ON MANUAL CONTROL, CAMBRIDGE, May 1973
- 247 SPECIAL STUDY REPORT ON APPROACH AND LANDING ACCIDENT PREVENTION, NTSB AAS-73-2, September 1973
- 248 CAHIER DES CHARGES DU COLLIMATEUR TH-CSF TYPE 193M, Thomson-CSF AVG/OP-73/169C, 1973
- 249 R. N. Barrett and R. G. White, "The Flight Development of Electronic Displays for V/STOL Approach Guidance," AGARD CP-148, May 1974
- 250 D. Behm, "HUD: Radar and Air-to-Air Modes," MCDONNELL-DOUGLAS PRODUCT SUPPORT DIGEST, 21, 1974, 11-12
- 251 I. Chancellor, VELOCITY VECTOR AND ENERGY MANAGEMENT -- A SENSIBLE WAY TO FLY AIRPLANES, Thomson-CSF L75C124, September 1974
- 252 D. H. Close, A. Au, and A. Graube, HOLOGRAPHIC LENS FOR PILOT'S HEAD-UP DISPLAY, Hughes Aircraft AD-787605, August 1974
- 253 P. B. Field and R. R. Smullen, NAVY TECHNICAL EVALUATION OF THE ELLIOTT TYPE 546 HEAD-UP DISPLAY IN THE TA-4H AIRPLANE, NATC WST-69R-74, July 1974; AD-921800L
- 254 J. P. Geddes, "Avionics and the Corsair," INTERAVIA, 19, October 1974, 1015-1018
- 255 T. Gold and R. M. Walchli, HEAD-UP DISPLAY FOR ALL-WEATHER APPROACH AND LANDING OF TILT-WING V/STOL AIRCRAFT, AIAA Paper 74-952, 1974
- 256 R. L. Harris, SIMULATION AND FLIGHT EVALUATION OF A HEADS-UP DISPLAY FOR GENERAL AVIATION, SAE Paper 740347, April 1974
- 257 J. E. Hutchinson, "The Approach Hazard," SHELL AVIATION NEWS, 426, 1974, 10-15

- 258 D. B. Middleton, ANALYSIS OF A FLARE-DIRECTOR CONCEPT FOR AN EXTERNAL BLOWN FLAP STOL AIRCRAFT, NASA TN-D-7760, November 1974
- 259 R. L. Newman, HEAD-UP DISPLAY BIBLIOGRAPHY, Bunker-Ramo WP-34-307-8, December 1974
- 260 C. Plummer, "HUD ... Basic Symbology, Hardware, and Navigation Modes," Mcdonnell-Douglas Product Support Digest, 21, 1974, 8-10
- 261 R. H. Pursel, AN EVALUATION OF A MICROWAVE RUNWAY PERSPECTIVE INDEPENDENT LANDING MONITOR, FAA RD-73-210, February 1974
- 262 R. H. Riordan, "Monocular Visual Cues and Space Perception During the Approach to Landing," AEROSPACE MEDICINE, 45, 1974, 766-771
- 263 R. R. Ropelewski, "Viggen Designed to Ease Pilot Workload," AVIATION WEEK, May 1, 1974, pp. 42-49
- 264 A. S. Santanelli and R. V. Kurowsky, EVALUATION OF A HEAD-UP DISPLAY AS AN AID IN PERFORMING STEEP-ANGLE APPROACHES, US Army ECOM-4185, January 1974
- 265 J. Schwelbe, PROGRAMMABLE HEAD-UP DISPLAY, Astronautics TR-75081, June 1974; AD-B007975L
- 266 J. J. Shrager, ADVANCED FLIGHT CONTROL AND ELECTRONIC DISPLAY SYSTEMS FOR ALL-WEATHER FLIGHT OPERATIONS: A LITERATURE REVIEW AND BIBLIOGRAPHY, FAA EM-74-12, June 1974
- 267 D. R. Sorum and B. L. Fister, C-5 VISUAL APPROACH MONITOR, US Air Force MAC-OTO-15-2-73, June 1974
- 268 STANDBY SIGHT FOR HEAD-UP TUBES, Rank BR-40536, April 1974; AD-920142L
- 269 ALTERNATE TECHNICAL PROPOSAL FOR A CH-3 HEAD-UP DISPLAY SYSTEM, Sundstrand Data Control 7101-2499-802, 1974
- 270 THE REQUIREMENT FOR VAM, Sundstrand Data Control Brochure, 1974
- 271 A-7D NAVIGATION/WEAPON DELIVERY SYSTEM, Vought 2-14000/4R-10, March 1974
- 272 C. L. Boyd and F. B. MacIntosh, "Business Aircraft All-Weather Operations," AIRCRAFT OPERATIONS MEETING, LOS ANGELES, August 1975
- 273 L. L. Crews and C. H. Hall, A7D/E AIRCRAFT NAVIGATION EVALUATIONS, NWC TN-404-176, March 1975

- 274 F. W. Cronn and E. A. Palmer, COMPARISON OF TWO HEAD-UP DISPLAYS IN SIMULATED STANDARD AND NOISE ABATEMENT NIGHT VISUAL APPROACHES, NASA TM-X-3264, July 1975
- 275 J. L. DeCelles, E. J. Burke, and J. E. O'Brien, "Warning ... Approach Lights in Sight," AIR LINE PILOT, February 1975, pp. 27-38
- 276 A. R. Doucette, "F-14 Aircraft Head Up Display," PROCEEDINGS NATIONAL AEROSPACE ELECTRONICS CONFERENCE (NAECON '75), DAYTON, June 10-12, 1975, pp. 594-600
- 277 J. H. Dwyer and E. A. Palmer, THREE METHODS OF PRESENTING FLIGHT VECTOR INFORMATION IN A HEAD-UP DISPLAY DURING SIMULATED STOL APPROACHES, NASA TM-X-3273, July 1975
- 278 J. E. Hutchinson, "Velocity Vector -- The Logical Solution -- Aircraft Guidance HUD," SHELL AVIATION NEWS, 427, 1975, 6-10
- 279 R. K. Kirschner, THE LIGHT-LINE HEAD-UP DISPLAY: A UNIQUE THREE DIMENSIONAL DISPLAY CUE, Sundstrand Data Control Report, May 1975
- 280 G. L. Lamers, "Flight Tests with a Simple Head-Up Display Used as a Visual Approach Aid," TAKEOFF AND LANDING, AGARD CP-160, January 1975, Paper 16
- 281 J. Lavernhe, "A New Pilot Head-Up Display -- Medical and Physiological Considerations," REVUE DE MEDICINE AERONAUTIQUE ET SPATIALE, 14, 1975, 3-ff.
- 282 J. R. Machin, "The Type 664 HUD Weapon Aiming System," ELECTRONIC AIRBORNE DISPLAYS, AGARD CP-167, April 1975
- 283 M. Martin, "Caracteristiques de Collimateur de Tir de Pilotage (HUD)" (Characteristics of Head-Up Display Systems), ELECTRONIC AIRBORNE DISPLAYS, AGARD CP-167, April 1975
- 284 D. B. Middleton, et al., MOTION-BASE SIMULATOR STUDY OF CONTROL OF AN EXTERNALLY BLOWN FLAP STOL TRANSPORT AIRCRAFT AFTER FAILURE OF AN OUTBOARD ENGINE DURING LANDING APPROACH, NASA TN-D-8026, October 1975
- 285 W. P. Orrick and P. E. York, HEAD-UP DISPLAY SYMBOLOGY, NADC 75267-40, December 1975
- 286 J. H. Smith and R. A. Chorley, "Head-Up and Other Displays," AIRCRAFT ENGINEERING, 47, February 1975, 18-22
- 287 R. M. Walchli, et al., FLIGHT EVALUATION OF A HEAD-UP DISPLAY WITH REAL WORLD OVERLAY FOR INSTRUMENT APPROACH AND LANDING OF V/STOL AIRCRAFT, NATC TR-SY-23R-75, October 1975

- 288 J.-C. L. Wanner, "Presentation des Informations Necessaires Pour le Decollage et l'Atterrissage (Presentation of Information Required for Takeoff and Landing)," TAKEOFF AND LANDING, AGARD CP-160, January 1975
- 289 TAKEOFF AND LANDING, AGARD CP-160, January 1975
- 290 ELECTRONIC AIRBORNE DISPLAYS, AGARD CP-167, April 1975
- 291 APPROCHE AUTOMATIQUE MODE LAND, PERIODE TRANSITORE DE 1 AVRIL 75 AU 12 OCTOBRE 75, Air Inter Report, October 1975
- 292 AV-8A HEAD UP DISPLAY MODIFICATION SPECIFICATION, McDonnell-Douglas MDC-A3589, September 1975
- 293 THE PERI-HUD, Marconi-Elliott, 1975
- 294 MILITARY STANDARD: ELECTRONICALLY OR OPTICALLY GENERATED DISPLAYS FOR AIRCRAFT CONTROL OR COMBAT CUE INFORMATION, MIL-STD-884C, April 1975
- 295 EVALUATION OF THE SONY HUD TV MONITOR SYSTEM IN THE YA-7H AIRPLANE, US Navy: NATC SY-24R-75, July 1975
- 296 J. F. Barnette, ROLE OF HEAD-UP DISPLAY IN INSTRUMENT FLIGHT, AFIFC LR-76-2, August 1976
- 297 J. F. Barnette and G. P. Intano, DETERMINING THE UTILITY OF EXPANDED PITCH SCALE AND FLIGHTPATH ANGLE AS DISPLAY PARAMETERS, AFIFC TR-76-4, October 1976
- 298 D. Chopping, "A Revolutionary All-Weather HUD," INTERAVIA, 31, 1976, 548-549
- 299 D. L. Dohm, R. J. McCammack, and T. E. Utz, RELIABILITY ANALYSIS OF MICROCIRCUIT FAILURES IN AVIONIC SYSTEMS (RAM-FAS), RADC TR-76-3, January 1976
- 300 A. R. Doucette, "Design Decisions for a Head-Up Display," IEEE SPECTRUM, 13, August 1976, 28-32
- 301 P. J. Edmunds, "Digital Computers for Head-Up Displays," AVIATION REVIEW, August 1976, pp. 14-16
- 302 D. E. Egan, "Research Toward Improving the Performance of Pilots Using Head-Up Displays," CARRIER LANDING PERFORMANCE CONFERENCE, NORFOLK, April 1976
- 303 J. E. Eisele, R. C. Williges, and S. N. Roscoe, THE ISOLATION OF MINIMUM SETS OF VISUAL IMAGE CUES SUFFICIENT FOR SPATIAL ORIENTATION DURING AIRCRAFT LANDING APPROACHES, University of Illinois ARC-76-16/ONR-76-3, November 1976

- 304 J. H. Ertzgaard, IFALPA FLIGHT TEST REPORT: THOMSON-CSF TC-121, IFALPA L76C228, January 1976
- 305 H. V. Fuller and B. K. E. Outlaw, DESCRIPTION OF A LANDING SITE INDICATOR (LASI) FOR LIGHT AIRCRAFT OPERATION, NASA TM-X-72811, January 1976
- 306 P. D. Gallaher, R. A. Hunt, and R. C. Williges, A REGRESSION ANALYSIS TO GENERATE AIRCRAFT PREDICTOR INFORMATION, NASA TM-X-73170, May 1976
- 307 R. L. Harris, M. W. Goode, and K. R. Yenni, SIMULATION AND FLIGHT EVALUATION OF A HEAD-UP DISPLAY LANDING AID FOR GENERAL AVIATION, NASA TP-1276, September 1976
- 308 R. E. Hillman and J. W. Wilson, "Investigation into the Optimum Use of Advanced Displays in Future Transport Aircraft," AERONAUTICAL JOURNAL, 80, 1976, 377-384
- 309 G. G. Hupp, A-10 INITIAL OPERATIONAL TEST AND EVALUATION, AFTEC TR-76-104, May 1976
- 310 J. E. Hutchinson, VELOCITY VECTOR -- THE LOGICAL SOLUTION, IFALPA Report, 1976
- 311 W. N. Kama, W. L. Martin, and G. G. Kuperman, "The Effect of HUD Symbology Size on Operator Performance Under Various Luminance Conditions," 5th SYMPOSIUM ON PSYCHOLOGY IN THE AIR FORCE, April 1976
- 312 J. S. Karmarker and J. A. Sorenson, INFORMATION AND DISPLAY REQUIREMENTS FOR INDEPENDENT LANDING MONITORS, NASA CR-2687, August 1976
- 313 F. A. Kirder, ROTABLE HEAD-UP DISPLAY WITH COORDINATE REVERSAL CORRECTIVES, US Patent No. 3,945,716, March 1976; AD-D002697
- 314 C. Owens, "Operations," AERONAUTICAL JOURNAL, 80, 1976, 350-353
- 315 E. A. Palmer and F. W. Cronn, "Touchdown Performance with a Computer Graphics Night Visual Attachment," JOURNAL OF AIRCRAFT, 13, 1976, 89-92
- 316 D. C. Short, "The Head-Up Display in Operation: One Airline's Experience," 29th ANNUAL AIR SAFETY SEMINAR, Anaheim, October 1976
- 317 W. F. Swartz, D. M. Condra, and R. P. Madero, PILOT FACTORS CONSIDERATIONS IN SEE-TO-LAND, AFFDL TR-76-52, May 1976

- 318 M. H. Tapia and G. P. Intano, LIGHT-LINE VISUAL LANDING HEAD-UP DISPLAY (HUD) EVALUATION, PHASE I, AFIFC TR-76-1, January 1976
- 319 G. J. Terhune, TC-121 AND OTHER HUD MISMATCH WITH RUNWAY, ALPA Report, May 1976
- 320 CRITICAL ITEM DEVELOPMENT SPECIFICATION FOR HEAD-UP DISPLAY, Fairchild A-10 Specification 160S417001B, March 1976
- 321 HEAD-UP DISPLAYS, Sundstrand Data Control Brochure, 1976
- 322 SYSTEM SPECIFICATION: HEAD-UP DISPLAY (HUD) AIR RETRIEVAL SYSTEM, Sundstrand Data Control 070-0936-001B, December 1976
- 323 BENDIX MICRO HUD, AFFDL Fact Sheet FS-76-01, 1976
- 324 HEAD-UP DISPLAY EVALUATION, 6594th Test Group LTR-76-8, August 1976
- 325 PROCEEDINGS OF THE CARRIER LANDING PERFORMANCE CONFERENCE, NORFOLK, US Navy Safety Center, April 1976
- 326 D. Bateman, "A Review of Some Recent Undershoot Accidents and Incidents: Five Year Period July 1972 to 1977," PROCEEDINGS INTERNATIONAL HEAD-UP DISPLAY SYMPOSIUM, VANCOUVER, September 1977
- 327 W. L. Carel, ADVANCED CONTACT ANALOG SYMBOLOGY, Hughes D-7123, July 1977
- 328 J. F. Coonrod and M. N. Ernstoff, "Advanced Head-Up Display Technology -- The Integrated HUD," PROCEEDINGS NATIONAL AEROSPACE ELECTRONICS CONFERENCE (NAECON '77), DAYTON, May 17-19, 1977, pp. 981-990
- 329 H. L. Ernst, "YC-14 VAM/HUD Program Experience," PROCEEDINGS INTERNATIONAL HEAD-UP DISPLAY SYMPOSIUM, VANCOUVER, September 1977
- 330 T. G. Foxworth, REPORT ON VISIT TO THE PARIS AIR SHOW, IF-ALPA Report, June 1977
- 331 W. B. Gartner and A. C. McTee, PILOTED FLIGHT SIMULATOR STUDY OF LOW-LEVEL WIND SHEAR, FAA RD-77-166, May 1977
- 332 G. N. Green, HEAD-UP DISPLAY SYMBOLOGY, RAE TN-77050, April 1977
- 333 R. F. Haines, "FAA/NASA Head-Up Display Program," PROCEEDINGS INTERNATIONAL HEAD-UP DISPLAY SYMPOSIUM, VANCOUVER, September 1977

- 334 S. G. Jackson, F-15 AFDT AND E AIR TO AIR GUNNERY EVALUA-
TION, AFFTC TR-76-51, February 1977
- 335 A. E. Kelvin, "V/STOL All Weather Landing Simulation," AD-
VANCED AIRCREW DISPLAY SYMPOSIUM, PATUXENT RIVER, 1977
- 336 R. M. Kiltz, "Fundamentals of HUD Technology," PROCEEDINGS
INTERNATIONAL HEAD-UP DISPLAY SYMPOSIUM, VANCOUVER, Septem-
ber 1977
- 337 W. N. Lewis, et al., TRADEOFF STUDY FOR A HEAD-UP DISPLAY IN
NEW TECHNOLOGIES, AD-A044484, August 1977
- 338 M. G. Long, "Considerations in the Simulation of Head-Up
Displays," PROCEEDINGS INTERNATIONAL HEAD-UP DISPLAY SYMPOS-
IUM, VANCOUVER, September 1977
- 339 R. L. Newman, CH-3E (MARS) HEAD-UP DISPLAY EVALUATION, Crew
Systems TR-77-02, April 1977
- 340 R. L. Newman, "Head-Up Displays: Crew Procedures and Train-
ing Implications," PROCEEDINGS OF THE INTERNATIONAL HEAD-UP
DISPLAY SYMPOSIUM, VANCOUVER, September 1977
- 341 R. J. Phaneuf and J. E. O'Brien, HEAD-UP DISPLAY IN COMMER-
CIAL AVIATION, AIAA Paper 77-1241, August 1977
- 342 R. Ribiere, ANALYSIS OF CIVILIAN AIRCRAFT FLIGHT SAFETY IN
THE APPROACH AND LANDING, Thomson-CSF Report, 1977
- 343 R. R. Ropelewski, "Head-Up Display System Evaluated," AVIA-
TION WEEK, January 10, 1977, pp. 70-79
- 344 D. C. Short, "Operational Briefing," PROCEEDINGS INTERNA-
TIONAL HEAD-UP DISPLAY SYMPOSIUM, VANCOUVER, September 1977
- 345 G. J. Terhune, "How an Airline Pilot Would Use HUD," PRO-
CEEDINGS INTERNATIONAL HEAD-UP DISPLAY SYMPOSIUM, VANCOUVER,
September 1977
- 346 R. N. Winner, M. N. Ernstoff, and W. R. Byles, LIQUID CRYSTAL
AIRBORNE DISPLAY. Hughes HAC-P76-527R, August 1977
- 347 LES APPROCHES DE PRECISION DE CATEGORIE III A LA COMPAGNIE
AIR INTER, Air Inter, September 1977
- 348 PROCEEDINGS INTERNATIONAL HEAD-UP DISPLAY SYMPOSIUM, VAN-
COUVER, September 1977
- 349 F-16 HUD HANDBOOK, Marconi-Elliott EA-08-0007-DC1, February
1977

- 350 SYSTEM SPECIFICATION: VISUAL APPROACH MONITOR FOR THE B-737 AIRCRAFT SYSTEM NO. 960-2008, Sundstrand Data Control 060-1624, January 1977
- 351 A-7D PROGRAMMED TEXT. HUD PART 1 AND PART 2, 162nd TFTG, January 1977
- 352 J. J. Adams and F. J. Lallman, DESCRIPTION AND PRELIMINARY STUDIES OF A COMPUTER DRAWN INSTRUMENT LANDING APPROACH DISPLAY, NASA TM-78771, November 1978
- 353 W. L. Augustine, et al., "A Head-Up Display for Drone Recovery," PROCEEDINGS OF THE 14th ANNUAL CONFERENCE ON MANUAL CONTROL, LOS ANGELES, NASA CP-2060, April 1978
- 354 J. R. Baxter, COMMENTS ON THE SECOND MEETING OF THE WORKING GROUP TO REVIEW FAA/NASA HEAD-UP DISPLAY RESEARCH, NASA AMES RESEARCH CENTER, OCTOBER 5-6, 1978, ALPA Report, October 1978
- 355 J. L. DeCelles and G. J. Terhune, A HUD SYMBOLOGY FOR CIVIL TRANSPORT AIRCRAFT, ALPA Report, April 1978
- 356 D. E. Egan and J. E. Goodson, HUMAN FACTORS ENGINEERING FOR HEAD-UP DISPLAYS: A REVIEW OF MILITARY SPECIFICATIONS AND RECOMMENDATIONS FOR RESEARCH, NAMRL Monograph 23, April 1978
- 357 C. D. Eliason, FLIGHT TEST REPORT ON DIFFRACTION OPTICS HEAD-UP DISPLAY, Trip Report on visit to Swedish Defence Material Administration Flight Test Center, Linkoping, August 1978
- 358 M. N. Ernstoff, "Head-Up Display for the Future," PROCEEDINGS OF THE SOCIETY FOR INFORMATION DISPLAY, 19, Fourth Quarter 1978, 169-179
- 359 T. G. Foxworth, "Head-Up Displays," JOURNAL OF BALPA, 39, July 1978, 5-7
- 360 C. P. Gibson, COLLIMATION AND THE HUMAN VISUAL SYSTEM -- A REVIEW AND LITERATURE SEARCH, RAE TM-FS-173, April 1978
- 361 J. G. Guercio and R. F. Haines, A PRELIMINARY STUDY OF HEAD-UP DISPLAY ASSESSMENT TECHNIQUES. II. HUD SYMBOLOGY AND PANEL INFORMATION SEARCH TIME, NASA TM-78536, October 1978; NASA HUD Report 3
- 362 R. F. Haines, PROJECT PLAN FOR JOINT FAA/NASA HEAD-UP DISPLAY CONCEPT EVALUATION, NASA TM-78512, August 1978; NASA HUD Report 1

- 363 R. F. Haines, PRELIMINARY STUDY OF HEAD-UP DISPLAY ASSESSMENT TECHNIQUES. I. VIEWING DURATION OF INSTRUMENT PANEL AND HUD SYMBOLOGY USING A RECALL METHODOLOGY, NASA TM-78517, August 1978; NASA HUD Report 2
- 364 J. H. Iavecchia, H. P. Iavecchia, and S. N. Roscoe, THE MOON ILLUSION: APPARENT SIZE AND ACCOMMODATION DISTANCE, University of Illinois Eng Psy-78-4/AFOSR 78-3, November 1978
- 365 J. V. Lebacqz, R. C. Radford, and J. L. Beilman, AN EXPERIMENTAL INVESTIGATION OF CONTROL-DISPLAY REQUIREMENTS FOR A JET-LIFT VTOL AIRCRAFT IN THE TERMINAL AREA, CALSPAN AK-58985-F-1, July 1978
- 366 J. R. Lowe, IMPROVING THE ACCURACY OF HUD APPROACHES WITH A NEW CONTROL LAW, AIAA Paper 78-1494, August 1978
- 367 J. H. Mills and R. L. Newman, HEAD-UP DISPLAY (HUD) QUESTIONNAIRE, AFIFC Report, February 1978
- 368 R. L. Newman, "KC-135 Boom Operator's Head-Up Display," JOURNAL OF AIRCRAFT, 15, 1978, 124-126
- 369 R. L. Newman, BENEFITS OF A KC-135 BOOM OPERATOR HEAD-UP DISPLAY, Crew Systems TR-78-08, May 1978
- 370 J. P. Petit and J. C. Raynal, "Investigation of the Landing Approaches for a STOL Aircraft Using a Flight Simulator," in FLIGHT SIMULATION/GUIDANCE SYSTEMS SIMULATION, AGARD, August 1978; in French
- 371 S. N. Roscoe, "When Day is Done and Shadows Fall, We Miss the Airport Most of All," ISASI FORUM, 11, Winter 1978, 27-31
- 372 B. Schiff, "Poor Man's Autothrottle," AOPA PILOT, January 1978, pp. 55-57
- 373 D. C. Short, "Head-Up Display in Operation," FLIGHT OPERATIONS, March 1978, pp. 25-29
- 374 J. J. Shrager, HEAD-UP DISPLAYS: A LITERATURE REVIEW AND ANALYSIS WITH AN ANNOTATED BIBLIOGRAPHY, FAA RD-78-31, April 1978
- 375 G. J. Terhune, "HUD -- Pilot's Aid for Precision in Approach and Landing," FLIGHT OPERATIONS, October 1978, pp. 20-25
- 376 G. J. Terhune, "HUD Display Info," FLIGHT OPERATIONS, December 1978, pp. 25-28
- 377 A-10 NIGHT/ADVERSE WEATHER EVALUATION, Fairchild Briefing Material, November 1978

- 378 PRIME ITEM DEVELOPMENT SPECIFICATION FOR THE F-16 HEAD-UP DISPLAY SET, CDRL-ELIN-A008, General Dynamics Specification 16ZE017C, August 1978
- 379 A. Berg, "Diffraction HUD Concept," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 380 A. D. Brown and D. J. Gurney, "Manual Landings in Category 3 Conditions," AERONAUTICAL JOURNAL, 83, 1979, 296-305
- 381 G. T. Chisum and P. E. Morway, VISUAL ACCOMMODATION RESPONSES IN A VIRTUAL IMAGE ENVIRONMENT, NADC 79216-60, 1979; AD-A074415
- 382 R. A. Chorley and S. M. St. Leger Searle, "Use of Diffractive Optical Elements in Head-Up Displays in Aircraft," CONFERENCE ON ELECTRONIC DISPLAYS 1979, London, September 4-6, 1979, pp. 11-ff.
- 383 J. L. DeCelles and G. J. Terhune, "Flight Instrumentation Requirements for All-Weather Approach and Landing," PROCEEDINGS 1979 AIR TRANSPORTATION CONFERENCE, NEW ORLEANS, April 30-May 3, 1979, pp. 153-164
- 384 D. N. Fadden and E. F. Weener, "Computer Generated Displays as Primary Flight Instruments," NEW TECHNOLOGY AND AVIATION SAFETY, Proceedings 32nd International Air Safety Seminar, Flight Safety Foundation, London, October 1979, pp. 127-133
- 385 E. Fischer, THE ROLE OF COGNITIVE SWITCHING IN HEAD-UP DISPLAYS, NASA CR-3137, May 1979; NASA HUD Report 5
- 386 L. H. Frank, COMPARISON OF SPECIFICATIONS FOR HEAD-UP DISPLAYS IN THE NAVY A-4M, A-7E, AV-8A, AND F-14A AIRCRAFT, NAMRL SR-79-6, November 1979; AD-A-080047
- 387 J. P. Galves and J. Brun, "Reliability of High-Brightness CRT's for Airborne Displays," in AVIONICS RELIABILITY, ITS TECHNOLOGY AND RELATED DISCIPLINES, AGARD CP-261, 1979
- 388 K. Hahn, et al., "Head-Up Display Simulator Using Computer Generated Analogue Images," PROCEEDINGS INTERNATIONAL CONFERENCE CYBERNETICS SOCIETY, DENVER, October 8-10, 1979, pp. 772-776
- 389 R. F. Haines, "FAA/NASA HUD Study," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 390 R. F. Haines and J. G. Guercio, "A Comparison of Information Transfer from an Instrument Panel and Symbolic Display Containing an Equivalent Amount of Information," PROCEEDINGS OF THE 1979 MEETING OF THE AEROSPACE MEDICAL ASSOCIATION, WASHINGTON, May 1979, pp. 37-38

- 391 R. K. Heffley and W. F. Jewel, DEVELOPMENT OF A CTOL PILOT TECHNIQUE MEASUREMENT SCHEME FOR A REAL-TIME SIMULATOR ENVIRONMENT, NASA CR-152294, July 1979; NASA HUD Report 9
- 392 E. L. Heft and R. L. Newman, "Using a Head-Up Display for Mid-Air Retrieval Systems," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 393 F. C. Hoerner, "HUD Military Aspects," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 394 M. Ivins, "Space Shuttle Applications," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 395 R. A. Juergens, "F/A-18 Hornet Display System," PROCEEDINGS NATIONAL AEROSPACE ELECTRONICS CONFERENCE (NAECON'79), DAYTON, May 15-17, 1979, pp. 434-442
- 396 R. M. Kiltz, "HUDs: An Overview of Progress," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 397 J. V. Lebacqz, SURVEY OF HELICOPTER CONTROL/DISPLAY INVESTIGATIONS FOR INSTRUMENT DECELERATING APPROACHES, NASA TM-78-565, March 1979; NASA HUD Report 15
- 398 J. L. Lightstone, et al., OPERATION OF THE F/A-18A AVIONIC SUBSYSTEM, McDonnell-Douglas MDC-A5769, January 1979; Revision A, November 1980
- 399 J. M. Naish, REVIEW OF SOME HEAD-UP DISPLAY FORMATS, NASA TP-1499, October 1979
- 400 J. G. Oliver, A REPORT ON THE TC-125 HEAD-UP DISPLAY, ALPA Report, 1979
- 401 H. Pekich, "Boom Operator HUD," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 402 A. Roland-Billecart, "Operational Experience with HUD in CAT III," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 403 R. R. Ropelewski, "Night/Adverse Weather Version of A-10 Provides Confident Low-Level Operations," AVIATION WEEK, August 6, 1979, pp. 54-57
- 404 S. N. Roscoe, GROUND REFERENCED VISUAL ORIENTATION WITH IMAGING DISPLAYS, University of Illinois TR-Eng Psy-79-4/AF-OSR-79-4, November 1979
- 405 S. N. Roscoe, "When Day is Done and Shadows Fall, We Miss the Airport Most of All," HUMAN FACTORS, 21, 1979, 721-731

- 406 R. Schilling, "Operational Requirements for CAT III and HUDs on DC-9-80," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 407 B. A. Smith, "Super 80 Head-Up Display Development Completed," AVIATION WEEK, August 6, 1979, pp. 54-57
- 408 R. H. Smith, N. D. Geddes, and J. Honaker, A PHASE ANGLE DESIGN CRITERIA FOR DYNAMIC FIDELITY OF MANNED AIRCRAFT SIMULATORS, System Research Laboratories Report, 1979
- 409 R. H. Smith and N. D. Geddes, HANDLING QUALITY REQUIREMENT FOR ADVANCED AIRCRAFT DESIGN: LONGITUDINAL MODE, AFFDL TR-78-154, August 1979
- 410 W. D. Smith, "Boeing HUD Development," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 411 H. Suisse, HEAD-UP DISPLAY SYSTEM -- PERSEPOLIS SYMBOLOGY, Dassault-Breguet DGT-16433, September 1979
- 412 G. J. Terhune, "Flight Guidance Data Required in CAT III HUD," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 413 G. J. Terhune, REPORT TO ALPA ON PERSEPOLIS SIMULATIONS, ALPA Report, November 1979
- 414 G. J. Terhune, REPORT TO ALPA ON TC-125 SIMULATIONS, ALPA Report, 1979
- 415 W. L. Welde, TRIP REPORT: TO NAVAL AIR TEST CENTER, PATUXENT RIVER NAS, MARYLAND, 26-27 SEPTEMBER 1979, AFAMRL Report, October 1979
- 416 J. W. Wilson and L. F. Bateman, "Human Factors and the Advanced Flight Deck," NEW TECHNOLOGY AND AVIATION SAFETY, Proceedings 32nd International Air Safety Seminar, Flight Safety Foundation, London, October 1979, pp. 113-126
- 417 P. Woodburn, "Are We Being HUDwinked," PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 418 "Head-Up Displays, The Tide has Turned," AIR LINE PILOT, October 1979, pp. 30-31
- 419 "A Word from the Navy," ALPA HEAD-UP DISPLAY NEWSLETTER, January 1979, pp. 4-5
- 420 PROGRAMME SIMULATEUR - APPROCHE AUTOMATIQUE MODE LAND, Air Inter Training Syllabus, April 1979
- 421 PRESENTATION DU TC-125 SUR SIMULATEUR MERCURE, Centre d'Essais en Vol, February 1979

- 422 FUNKTIONAL U. OPERATIONELLE BEWERTUNG EINES BORDGESTUETZTEN GLEITPHADFUEHRUNGSSYSTEMS FUER SICHTANFLUEGE (VISUAL APPROACH MONITOR, VAM), DFVIR F8-78-38, October 1979
- 423 HEAD-UP DISPLAY FOR THE DC-9 SUPER 80, Douglas Brochure, September 1979
- 424 PROCEEDINGS OF THE FLIGHT OPERATIONS SYMPOSIUM, VANCOUVER, February 1979
- 425 NEW TECHNOLOGY AND AVIATION SAFETY, Proceedings 32nd International Air Safety Seminar, Flight Safety Foundation, London, October 1979
- 426 AH-1S COBRA ATTACK HELICOPTER HEAD-UP DISPLAY SYSTEM DESCRIPTION, Kaiser Electronics, Brochure 78-3945, October 1979
- 427 F/A-18 AND TF/A-18 HUMAN ENGINEERING CREW STATION DESIGN DOCUMENT, McDonnell-Douglas A4277-4, February 1979
- 428 MILITARY SPECIFICATION: FLYING QUALITIES OF PILOTED AIRPLANES, MIL-F-8785C, November 1979
- 429 HEAD-UP DISPLAY FOR THE DC-9 SUPER 80, Sundstrand Data Control Brochure, 1979
- 430 D. T. Berry, et al., A SUMMARY OF AN IN-FLIGHT EVALUATION OF CONTROL SYSTEM PURE TIME DELAYS DURING LANDING USING THE F-8 DFBW AIRPLANE, AIAA Paper 80-1626, August 1980
- 431 R. S. Bray, A HEAD-UP DISPLAY FORMAT FOR APPLICATION TO TRANSPORT AIRCRAFT APPROACH AND LANDING, NASA TM-81199, July 1980; NASA HUD Report 11
- 432 J. L. DeCelles, et al., THE CAT III CRISIS, ALPA Report, March 1980
- 433 E. Fischer, R. F. Haines, and T. A. Price, COGNITIVE ISSUES IN HEAD-UP DISPLAYS, NASA TP-1711, December 1980; NASA HUD Report 7
- 434 M. L. Frazier and D. W. Milam, A SYNOPSIS OF PILOT COMMENTS ON ONE-TIME F-16 FSD QUALIFICATION/FAMILIARIZATION FLIGHTS, AFFTC Letter Report, October 1980
- 435 C. P. Gibson, "Binocular Disparity and Head-Up Displays, " HUMAN FACTORS, 22, 1980, 435-444
- 436 A. P. Ginsburg, "Proposed New Vision Standards for the 1980s and Beyond: Contrast Sensitivity," presented at the AGARD NATO Specialist Aerospace Medical Panel Meeting, Toronto, September 1980

- 437 R. F. Haines, A SUMMARY OF SELECTED QUESTIONNAIRE RESPONSES FOR SUBJECT PILOTS TESTED IN THE JOINT FAA/NASA HEAD-UP DISPLAY CONCEPT EVALUATION PROJECT, NASA (Ames Research Center) Report, October 1980
- 438 R. F. Haines, E. Fischer, and T. A. Price, HEAD-UP TRANSITION BEHAVIOR OF PILOTS WITH AND WITHOUT HEAD-UP DISPLAY IN SIMULATED LOW-VISIBILITY APPROACHES, NASA TP-1720, December 1980; NASA HUD Report 10
- 439 J. R. Lowe and F. W. Hamilton, "The DC-9 Super 80 Compensated-Control HUD," DC FLIGHT APPROACH, 34, January 1980, 7-11
- 440 R. W. Lowrie, RELIABILITY AND MAINTAINABILITY IMPROVEMENT PROGRAM FOR THE AV-8A/TAV-8A HARRIER HEAD-UP DISPLAY SET, Smiths Industries SI-1002, 1980; AD-A085310
- 441 E. Malinski, "Elektroniczno-optyczne systemy wskazan proekcyjnych/HUD III," TECHNIKA LOTNICZA I ASTRONAUTYCCZENA, 35, August/September 1980, 17-20; IAA A81-11320; in Polish
- 442 S. J. Monagan and R. E. Smith, "Head-Up Display Flight Tests," PROCEEDINGS 24th SOCIETY OF EXPERIMENTAL TEST PILOTS SYMPOSIUM, BEVERLY HILLS, September 1980, pp. 75-87
- 443 J. M. Naish and D. L. Miller, EXPERIMENTAL EVALUATION OF HEAD-UP DISPLAYS, NASA-TP-1550, July 1980
- 444 J. M. Naish, HEAD-UP DISPLAY IN THE NON-PRECISION APPROACH, NASA TM-81167, May 1980; NASA HUD Report 12
- 445 R. L. Newman, TRIP REPORT: VISIT TO BRITISH AIRWAYS, LONDON; BRITISH CAA, REDHIL; AIR INTER, PARIS; FRENCH DGAC, PARIS; AND AVICNCS MARCEL DASSAULT, PARIS: 19-27 FEBRUARY 1980, Crew Systems LR-80-03, February 1980
- 446 R. L. Newman, OPERATIONAL PROBLEMS ASSOCIATED WITH HEAD-UP DISPLAYS DURING INSTRUMENT FLIGHT, AFAMRL TR-80-116, October 1980; Crew Systems Consultants TR-79-20
- 447 R. J. Randle, S. N. Roscoe, and J. C. Petit, EFFECTS OF MAGNIFICATION AND VISUAL ACCOMMODATION ON AIMPOINT ESTIMATION IN A SIMULATED LANDING TASK, NASA TP-1635, October 1980
- 448 R. R. Ropelewski, "FAA to Begin Testing Advanced Head-Up Display," AVIATION WEEK, May 5, 1980, pp. 80-88
- 449 S. Schifflett, EVALUATION OF A PILOT WORKLOAD ASSESSMENT DEVICE TO TEST ALTERNATE DISPLAY FORMATS AND CONTROL HANDLING QUALITIES, NATC SY-33R-80, July 1980
- 450 J. W. Steenblik, "The Future of HUD is Looking Up," AIR LINE PILOT, February 1980, pp. 6-10

- 451 R. F. Stengel and G. E. Miller, "Flight Tests of a Microprocessor Control System," JOURNAL OF GUIDANCE AND CONTROL, 3, 1980, 494-500; AIAA Paper 79-1962
- 452 G. J. Terhune, REPORT ON DOUGLAS DC-9-10 HUD, ALPA Report, March 1980
- 453 G. J. Terhune and J. L. DeCelles, PERSEPOLIS HUD, ALPA Report, January 1980
- 454 F-16 AVIONICS: BLOCK 10 CHANGES, General Dynamics 16PR1467B, November 1980
- 455 R. S. Bray and B. C. Scott, A HEAD-UP DISPLAY FORMAT FOR LOW VISIBILITY APPROACH AND LANDING, AIAA PAPER 81-0130, January 1981
- 456 L. L. Dopping-Hepenstal, "Head-Up Displays. The Integrity of Flight Information," IEE PROCEEDINGS, PART F: COMMUNICATIONS, RADAR AND SIGNAL PROCESSING, 128, 1981, 440-442
- 457 M. N. Ernstoff, STUDY AND DEVELOPMENT OF AN INTEGRATED HEAD-UP DISPLAY, AFWAL TR-81-1042, June 1981
- 458 G. A. Hobe, et al., GOVERNMENT FURNISHED COCKPIT INSTRUMENTS AND DISPLAYS STUDY, USAF Aeronautical Systems Division Report Project 81-015-DAY, 1981
- 459 D. Jarvi, INVESTIGATION OF SPATIAL DISORIENTATION OF F-15 "EAGLE" PILOTS, ASD TR-81-5016, 1981
- 460 E. F. Leitner and R. F. Haines, MAGNITUDE OF VISUAL ACCOMMODATION TO A HEAD-UP DISPLAY, NASA TP-1796, February 1981
- 461 R. B. Lumsden, et al., THE ECONOMIC CATEGORY 3 PROGRAMME, RAE TR-81025, February 1981
- 462 C. Maureau, "Head-Up Displays," THE IMPACT OF NEW GUIDANCE AND CONTROL SYSTEMS ON MILITARY AIRCRAFT COCKPIT DESIGNS, AGARD CP-312, May 1981
- 463 R. L. Newman and W. L. Welde, "Head-Up Displays in Operation -- Some Unanswered Questions," PROCEEDINGS: 1st SYMPOSIUM ON AVIATION PSYCHOLOGY, Ohio State University APL-1-81, April 1981
- 464 R. L. Newman, "Head-Up Displays Operational Problems," PROCEEDINGS 5th ADVANCED AIRCREW DISPLAY SEMINAR, PATUXENT RIVER, September 1981, pp. 241-250
- 465 R. R. Ropelewski, "DC-9-80 Nears Category 3 Certification," AVIATION WEEK, February 23, 1981, pp. 43-46

- 466 M. J. Tkach, "F/A-18 Weapon System Development," CANADIAN AERONAUTICS AND SPACE JOURNAL, 27, 1981, 242-252
- 467 PROCEEDINGS 5th ADVANCED AIRCREW DISPLAY SEMINAR, PATUXENT RIVER, September 1981
- 468 F-16 AVIONICS SYSTEM MANUAL, BLOCK 15B, General Dynamics 16-PR1624A, November 1981
- 469 F-16 AVIONICS SYSTEM MANUAL, BLOCK 25B, General Dynamics 16-PR3927A, December 1981
- 470 TECHNICAL DESCRIPTION: AN/AVQ-24B A-4M HUDWAC SYSTEM, Marconi-Elliott, May 1981
- 471 J. T. Bakker, "Effect of Control System Delays on Fighter Flying Qualities," SYMPOSIUM ON CRITERIA FOR HANDLING QUALITIES OF MILITARY AIRCRAFT, FORT WORTH, AGARD Symposium, April 1982, Paper 19
- 472 J. W. Clark and K. W. Goldstein, "Status of VTOL and VSTOL Flying Qualities Criteria Development: Where Are We and Where Are We Going?", SYMPOSIUM ON CRITERIA FOR HANDLING QUALITIES OF MILITARY AIRCRAFT, FORT WORTH, AGARD Symposium, April 1982, Paper 2
- 473 B. M. Elson, "Holographic HUD Aimed at Package Express Carriers," AVIATION WEEK, December 13, 1982
- 474 J. H. Gard, "Holographics HUDs De-Mystified," PROCEEDINGS NATIONAL AEROSPACE ELECTRONICS CONFERENCE (NAECON '82), DAYTON, May 1982, pp. 752-759
- 475 F. W. Hamilton, "Development and Certification of a Commercial Head-Up Display", PROCEEDINGS 26th SOCIETY OF EXPERIMENTAL TEST PILOTS SYMPOSIUM, BEVERLY HILLS, September 1982, pp. 123-130
- 476 J. C. Hull, R. T. Gill, and S. N. Roscoe, "Locus of the Stimulus to Visual Accommodation: Where in the World or Where in the Eye?", HUMAN FACTORS, 24, 1982, 311-319
- 477 J. K. Lauber, et al., AN OPERATIONAL EVALUATION OF HEAD-UP DISPLAYS FOR CIVIL TRANSPORT OPERATIONS. NASA/FAA PHASE III FINAL REPORT, NASA TP-1815, August 1982
- 478 W. L. Martin, et al., NIGHT ATTACK WORKLOAD STEERING GROUP, ASD TR-82-5002, June 1982
- 479 R. E. Smith and R. E. Bailey, "Effect of Control System Delays on Fighter Flying Qualities," SYMPOSIUM ON CRITERIA FOR HANDLING QUALITIES OF MILITARY AIRCRAFT, FORT WORTH, AGARD Symposium, April 1982, Paper 18

- 480 D. P. Wagner, R. L. Newman, et al., "Risk Assessment of Approach and Landing," IEEE INTERNATIONAL CONFERENCE ON CYBERNETICS AND SOCIETY, SEATTLE, October 1982
- 481 HOLOGRAPHIC HEAD-UP DISPLAY FOR TRANSPORT AIRCRAFT, Flight Dynamics Brochure, May 1982
- 482 F-16 AVIONICS: BLOCK 15B IMPROVEMENTS, General Dynamics 16-PR1628E, July 1982
- 483 MINIMUM PERFORMANCE STANDARDS FOR AIRBORNE MULTIPURPOSE ELECTRONIC DISPLAYS, SAE Aerospace Standard AS-8034, December 1982
- 484 VE-110 ELECTRONIC HEAD-UP DISPLAY AND WEAPON AIMING SYSTEM, Thomson-CSF Brochure, 1982
- 485 J. E. Blaha, HEADS UP DISPLAY SYMBOLOGY DESCRIPTION, NASA Description of Orbiter Display as flown on STS-8 and subsequent Space Shuttle flight, January 1983
- 486 R. D. Blomberg and R. D. Pepler, "Performance Evaluation of Electronic Flight Instruments," PROCEEDINGS OF THE 2nd SYMPOSIUM ON AVIATION PSYCHOLOGY, OHIO STATE UNIVERSITY, April 1983, pp. 17-25
- 487 G. P. Boucek, T. A. Pfaff, and W. D. Smith, THE USE OF HOLOGRAPHIC HEAD-UP DISPLAY OF FLIGHT PATH SYMBOLOGY IN VARYING WEATHER CONDITIONS, SAE Paper 831445, 1983
- 488 J. P. Desmond, A HOLOGRAPHIC HEAD-UP DISPLAY FOR LOW VISIBILITY LANDING OPERATIONS, SAE Paper 831451, October 1983
- 489 A. P. Ginsburg, W. L. Martin, and H. Self, "Contrast Sensitivity Performance Assessment of HUD Display Systems," PROCEEDINGS OF THE 2ND SYMPOSIUM ON AVIATION PSYCHOLOGY, OHIO STATE UNIVERSITY, April 1983, pp. 473-480
- 490 D. W. Hussey, "Wide Angle Raster Head-Up Display Design and Application to Future Single Seat Fighters," 42ND SYMPOSIUM ON IMPACT OF ADVANCED AVIONICS TECHNOLOGY ON GROUND ATTACK WEAPON SYSTEMS, AGHIOS-ANDREAS, GREECE, October 1983
- 491 J. M. Kraus, FLIGHT DYNAMICS MODEL 1000 HEAD-UP DISPLAY BASIC PILOT TRAINING MANUAL, Flight Dynamics 404-0071, June 1983
- 492 J. R. Lowe and J. R. Ornelas, "Applications of Head-Up Displays in Commercial Transport Aircraft," JOURNAL OF GUIDANCE, CONTROL, AND DYNAMICS, 6, 1983, 77-83
- 493 W. L. Martin (ed.), OPTICAL AND HUMAN PERFORMANCE EVALUATION OF HUD SYSTEMS DESIGN, AFAMRL TR-83-95, December 1983; ASD-TR-83-5019

- 494 J. G. Oliver, "Flight Dynamics Head-Up Display," ALPA Letter to Flight Dynamics, December 14, 1983
- 495 M. Parrag, "Training Pilots for Testing Airplanes with Modern Flight Control Systems," SETP COCKPIT, 18, 2nd Quarter 1983, 5-20
- 496 J. Payne, COMPARISON OF THE LONGITUDINAL FLYING QUALITIES OF AN OPTIMAL PILOT MODEL, A GROUND-BASED SIMULATOR, AND AN AIRBORNE SIMULATOR, AFIT GAE/AA/83S-5, September 1983; AD-A135853
- 497 B. G. Powley, "The Cosmic HUD and Instrument Flying," TAC ATTACK, December 1983, pp. 4-6
- 498 L. F. Ruhl, et al., EVALUATION OF FLIGHT DYNAMICS, INC. HUD -- TRIP REPORT, McDonnell-Douglas C1-E87-FS-251
- 499 A. Schwab, "Move over EFIS, Here Comes HUD," PROFESSIONAL PILOT, September 1983, pp. 156-160
- 500 B. C. Scott, et al., INSTALLATION, VALIDATION, AND FLIGHT EVALUATION OF THE FEDERAL AVIATION ADMINISTRATION'S HEAD-UP DISPLAY SYSTEM, FAA CT-82-92, April 1983
- 501 L. G. Summers and J. I. Miller, PRIMARY FLIGHT DISPLAY, A STEP BEYOND EADIs, SAE Paper 831533, 1983
- 502 SYSTEM DESCRIPTION FOR FDI MODEL 1000 HEAD-UP DISPLAY, Flight Dynamics 404-0097, November 1983
- 503 F-18 HEAD-UP DISPLAY/MULTIPURPOSE DISPLAY GROUP SYSTEM DESCRIPTION, Kaiser Electronics Brochure C78-3514, August 1983
- 504 WINDSHIELD GUIDANCE DISPLAY-2 USER'S GUIDE, SFENA Brochure A70-BY-981, November 1983
- 505 PROCEEDINGS OF THE HUD/INSTRUMENTS CONFERENCE, LANGLEY AFB, TAC Headquarters, June 1983
- 506 TMV-980A ELECTRONIC MULTIDISPLAY SYSTEM, Thomson-CSF Brochure, 1983
- 507 T. S. Abbott, SIMULATION OF A COCKPIT-DISPLAY CONCEPT FOR EXECUTING A WAKE-VORTEX AVOIDANCE PROCEDURE, NASA TP-2300, April 1984
- 508 T. G. Foxworth, "Advent of the Glass Cockpit," PROFESSIONAL PILOT, November 1984, pp. 120-125
- 509 S. M. Herlt, et al., COMPARISON OF THE EFFECTS OF PURE AND EQUIVALENT TIME DELAYS ON APPROACH AND LANDING HANDLING QUALITIES, USAFTPS TR-83B-1-2, May 1984

- 510 L. Knotts, J. Ball, and M. Parrag, TEST PILOT SCHOOL: FLIGHT SYLLABUS AND BACKGROUND MATERIAL FOR THE NT-33A RESEARCH AIRCRAFT, CALSPAN Report, June 1984
- 511 R. L. Newman, EVALUATION OF MD-80 HUD, Crew Systems Consultants TM-84-01, February 1984
- 512 R. L. Newman, EVALUATION OF FDI HUD, Crew Systems Consultants TM-84-03, March 1984
- 513 R. L. Newman and T. G. Foxworth, A REVIEW OF HEAD-UP DISPLAY SPECIFICATIONS, Crew Systems Consultants TR-84-04, April 1984
- 514 B. G. Powers, SPACE SHUTTLE PILOT-INDUCED-OSCILLATION RESEARCH TESTING, NASA TM-86034, February 1984; N84-20566
- 515 J. W. Steenblik, "The Caret, the Worm, and the Flat-footed Duck," AIR LINE PILOT, March 1984, pp. 6-11, 38-39
- 516 R. M. Taylor, "Some Effects of Display Format Variables on the Perception of Aircraft Spatial Orientation," AGARD SYMPOSIUM ON HUMAN FACTORS CONSIDERATIONS IN HIGH PERFORMANCE AIRCRAFT, WILLIAMSBURG, AGARD-CP-371; April/May 1984
- 517 R. Warren, L. V. Genco, and T. R. Cannon, HORIZONTAL DIPLOPIA THRESHOLDS FOR HEAD-UP DISPLAYS, AFAMRL TR-84-18, April 1984
- 518 PROCEEDINGS, 6th ADVANCED AIRCREW DISPLAY SYMPOSIUM, PATUXENT RIVER, May 1984
- 519 HEAD-UP DISPLAY SYMBOLOGY AND MECHANIZATION STUDY FINAL TECHNICAL REPORT, Midwest System Research Report, March 1984
- 520 MILITARY SPECIFICATION: DISPLAYS, AIRBORNE, ELECTRONICALLY-OPTICALLY GENERATED, MIL-D-87213, September 1984
- 521 MILITARY STANDARD: AIRCRAFT DISPLAY SYMBOLOGY, MIL-STD-1787, December 1984
- 522 INSTRUMENT FLIGHT IN SINGLE SEAT FIGHTER AIRCRAFT USING THE HEADS UP DISPLAY (HUD), PACAF-Pamphlet-51-11, April 1984; see also USAFE-Pamphlet-51-9
- 523 W. L. Augustine and C. D. Simmons, CRITERIA TO BE CONSIDERED FOR APPROVING THE HEAD-UP DISPLAY AS THE PRIMARY FLIGHT INSTRUMENT, ASD/XOR Report, March 1985
- 524 J. H. Iavecchia, RESPONSE BIASES WITH VIRTUAL IMAGING DISPLAYS, NADC-85165-60, June 1985

- 525 W. D. Kyle, HEAD-UP DISPLAYS FOR GENERAL AVIATION, SAE Paper 850902, April 1985
- 526 G. B. McNaughton, "Vision in Spatial Disorientation (SDO) and Loss of Aircraft Attitude or Control Awareness," PROCEEDINGS 3rd SYMPOSIUM ON AVIATION PSYCHOLOGY, OHIO STATE UNIVERSITY, April 1985, pp. 25-38
- 527 R. L. Newman, HUD EVALUATION FLIGHT IN NT-33, Crew Systems TM-85-13, April 1985
- 528 S. N. Roscoe, "Bigness is in the Eye of the Beholder", HUMAN FACTORS, 27, 1985, 615-636
- 529 B. L. Schmidt and R. Schilling, SWISSAIR MD-81: THREE WINTERS OF CAT 3, Swissair Briefing Notes, 1985
- 530 "Jaguar Hit Trees," FLIGHT INTERNATIONAL, 19 July 1985, p. 16
- 531 INDICATOR GROUP, HEAD-UP DISPLAY OD-(*)/AVQ, DESIGN CONTROL SPECIFICATION FOR F-14D AND A-6E UPGRADE WEAPON SYSTEMS, Grumman Specification A55DCVAD051, April 1985
- 532 HEAD-UP DISPLAY SYSTEM, MODEL 9000, Jet Electronics and Technology Specification, March 1985
- 533 FLIGHT INSTRUMENTATION CONFERENCE, PENTAGON, USAF, June 1985
- 534 AIRCRAFT ATTITUDE AWARENESS WORKSHOP, WRIGHT-PATTERSON AFB, USAF, October 1985
- 535 R. E. Bailey, EFFECT OF HEAD-UP DISPLAY DYNAMICS ON FIGHTER FLYING QUALITIES, AIAA Paper 86-2206, July 1986
- 536 R. E. Bailey, INVESTIGATION OF HEAD-UP DISPLAY DYNAMIC RESPONSE AND SYMBOL ACCURACY REQUIREMENTS, CALSPAN 7205-14, August 1986
- 537 H. Brantburg, A COCKPIT DISPLAY ENVIRONMENT, Ericsson Radio Systems Report, May 1986
- 538 J. Desmond, IMPROVEMENTS IN AIRCRAFT SAFETY AND OPERATIONAL DEPENDABILITY FROM A PROJECTED FLIGHT PATH GUIDANCE DISPLAY, SAE Paper 861732, October 1986
- 539 U. Frieberg and S. Holmström, "An Ordinary 3-Axis Horizon Instrument Which Every Pilot Likes -- Can It Be Misleading and Dangerous? The Answer is 'Yes'," PROCEEDINGS 30th SOCIETY OF EXPERIMENTAL TEST PILOTS SYMPOSIUM, BEVERLY HILLS, September 1986, pp. 187-199
- 540 J.-F. Georges, FLYING HEAD-UP, Dassault-Breguet Report, October 1986

- 541 J. Guttman, EVALUATION OF THE F/A-18 HEAD-UP DISPLAY FOR RECOVERY FROM UNUSUAL ATTITUDES, NADC Report, October 1986
- 542 J. E. Hutchinson, THE ADVANTAGES OF A PRIMARY FLIGHT DISPLAY, SAE Paper 861730, October 1986
- 543 J. R. Kelly and L. H. Person, FLIGHT TESTING TECS -- THE TOTAL ENERGY CONTROL SYSTEM, SAE Paper 861803, October 1986
- 544 L. B. McCormack and F. L. George, "Impact of Display Dynamics on Flying Qualities," PROCEEDINGS NATIONAL AEROSPACE ELECTRONICS CONFERENCE (NAECON '82), DAYTON, May 1986
- 545 R. L. Newman, FLIGHT EVALUATION OF JET HUD IN PILATUS PC-9, Crew Systems TM-86-15A, November 1986
- 546 R. L. Newman, THE HEAD-UP DISPLAY AS A PRIMARY FLIGHT REFERENCE, Crew Systems TM-86-22, December 1986
- 547 J. Norman and S. Ehrlich, "Visual Accommodation and Virtual Image Displays: Target Detection and Recognition," HUMAN FACTORS, 28, 1986, 135-151
- 548 J. G. Oliver, THE ADVANTAGE OF FLIGHTPATH-ORIENTED SITUATION DISPLAYS DURING MICROBURST ENCOUNTERS, SAE Paper 861733, October 1986
- 549 L. Ravich, "Head-Up Displays in Avionics," LASER FOCUS, 22, April 1986, 78-84
- 550 S. N. Roscoe, "Designed for Disaster," HUMAN FACTORS SOCIETY BULLETIN, 29, June 1986, 1-2
- 551 S. N. Roscoe, "Spatial Misorientation Exacerbated by Collimated Virtual Flight Display," INFORMATION DISPLAY, September 1986, pp. 27-28
- 552 D. M. Trousdale, FLYING THE FLIGHT DYNAMICS HUD: WINDSHEAR SYMBOLOGY, ALPA Report, August 1986
- 553 "Displays Displayed," FLIGHT INTERNATIONAL, 13 September 1986, p. 25
- 554 FLIGHT DECK, HEAD-UP DISPLAYS, SAE ARP-4053/8, 1986
- 555 INSTRUMENT FLYING, AFM-51-37, July 1986
- 556 D. Hameluck and P. Stager, "The Peripheral Visual Horizon Display: A Review," PROCEEDINGS 4th INTERNATIONAL SYMPOSIUM ON AVIATION PSYCHOLOGY, COLUMBUS, April 1987
- 557 H. Hopkins, "New Horizons in Flight Displays," FLIGHT INTERNATIONAL, 31 January 1987, pp. 28-30

- 558 J. H. Iavecchia, THE POTENTIAL FOR DEPTH PERCEPTION ERRORS IN PILOTING THE F-18 AND A-6 NIGHT ATTACK AIRCRAFT, NADC Report in preparation, 1987
- 559 R. L. Newman, EVALUATION OF THE FDI HEAD-UP DISPLAY, Crew Systems TM-87-04, January 1987
- 560 R. L. Newman and R. E. Bailey, HEAD-UP DISPLAY DYNAMICS FLIGHT TESTS, Crew Systems TR-87-12, June 1987
- 561 R. L. Newman and R. E. Bailey, HEAD-UP DISPLAY ACCURACY FLIGHT TESTS, Crew Systems TR-87-13, June 1987
- 562 R. L. Newman, EVALUATION OF HEAD-UP DISPLAYS TO ENHANCE UNUSUAL ATTITUDE RECOVERY, Crew Systems TR-87-14, June 1987
- 563 J. Reiman, "Peripheral Vision Display," AEROSPACE CANADA INTERNATIONAL, January/February 1987, pp. 25-27
- 564 J. W. Steenblik, "Getting the Big Picture into the Cockpit," AIR LINE PILOT, January 1987, pp. 10-14
- 565 R. M. Taylor, "Attitude Awareness from Aircraft Head-Up Displays," PROCEEDINGS 4th INTERNATIONAL SYMPOSIUM ON AVIATION PSYCHOLOGY, COLUMBUS, April 1987
- 566 PROCEEDINGS 4th INTERNATIONAL SYMPOSIUM ON AVIATION PSYCHOLOGY, COLUMBUS, April 1987
- 567 HEAD-UP GUIDANCE SYSTEM, Flight Dynamics Pilot Guide, n. d.
- 568 JET SERIES 1000 HUD, Jet Electronics and Technology Brochure DL585K2, n. d.
- 569 JET 1000 HUD SERIES HEAD-UP DISPLAY SYSTEM, Jet Electronics and Technology Brochure 784/2M/DL, n. d.
- 570 F-15 HEAD-UP DISPLAY, McDonnell-Douglas Brochure, n. d.
- 571 HEAD-UP DISPLAY WEAPON AIMING SYSTEM, TYPE 664, Marconi-Elliott Brochure, n. d.
- 572 HEAD-UP DISPLAY WEAPON AIMING SYSTEM, TYPE 666, Marconi-Elliott Brochure, n. d.
- 573 MILITARY HEAD-UP DISPLAY SYSTEM, Marconi-Elliott Brochure, n. d.
- 574 80 SERIES HEAD-UP DISPLAY SYSTEM FOR TRANSPORT AIRCRAFT, Marconi-Elliott Brochure, n. d.
- 575 FLEXIHUDD ELECTRONIC DISPLAY SYSTEM, Smiths Industries Brochure, n. d.

- 576 WEAPON AIMING AND HEAD-UP DISPLAY SYSTEM, Smiths Industries Brochure, n. d.
- 577 LIGHT LINE HEAD-UP DISPLAY SYSTEM, Sundstrand Data Control Pilot Handbook, n. d.
- 578 VISUAL APPROACH MONITOR, Sundstrand Data Control Brochure, n. d.
- 579 COLLIMATEUR A TUBE CATHODIQUE TC-121, Thomson-CSF Brochure, n. d.
- 580 TECHNICAL AND OPERATIONAL DESCRIPTION OF CV-91AB, Thomson-CSF Brochure, n. d.
- 581 A-7D FLIGHT MANUAL, USAF TO-1A-7D-1, n. d.
- 582 A-10A FLIGHT MANUAL, USAF TO-1A-10A-1, n. d.
- 583 F-15A FLIGHT MANUAL, USAF TO-1A-15A-1, n. d.
- 584 F-16A FLIGHT MANUAL, USAF TO-1A-16A-1, n. d.
- 585 AV-8A FLIGHT MANUAL, US Navy NAVAIR-01-AV8A-1, n. d.
- 586 F-14A FLIGHT MANUAL, US Navy NAVAIR-01-F14AAA-1, n. d.

Author Index

T. S.	Abbott	507				
J. J.	Adams	352				
B. L.	Alexander	223				
I. D. C.	Andrew	60				
D. B.	Armstrong	119				
C.	Arnoldy	163				
M.	Astolfi	509				
A.	Au	252				
W. L.	Augustine	12	206	353	523	
R. E.	Bailey	479	535	536	560	561
J. T.	Bakker	471				
K. M.	Baldwin	148	234			
J.	Ball	510				
J. F.	Barnette	296	297			
R. N.	Barrett	249				
D.	Bateman	326				
L. F.	Bateman	416				
J. R.	Baxter	15	21	22	354	
J. T.	Bear	224				
R. H.	Beck	69	84	85	144	147
H.	Becker	120				
R. A.	Behan	30	70			
D.	Behm	250				
J. L.	Beilman	365				
M. E.	Benjamin	145				
A. J.	Benson	44	164			
J. A.	Benson	24				
J.	Bentley	121				
L. C.	Bentley	5				
A.	Berg	379				
B.	Bergstrom	45	58	71		
M.	Berjal	198				
D. T.	Berry	430				
J. E.	Blaha	485				
R. D.	Blomberg	486				
W.	Bollinger	108				
G. P.	Boucek	487				
K.	Bourquin	225				
T. G.	Bowen	353				
C. L.	Boyd	272				
H.	Brantburg	537				
R. S.	Bray	431	455	477	500	
A. T.	Brazer	500				
A. D.	Brown	226	380			
J.	Brun	387				
K.	Burdin	61				
E. J.	Burke	147	275	432		
K. T.	Burnette	165				
M. C.	Buriett	6				

A. A.	Burroughs	47					
K. L.	Burroughs	72	147				
W. R.	Byles	346					
B.	Caiger	166					
E. S.	Calvert	3					
P.	Care	86					
W. L.	Carel	46	327				
D. L.	Carmack	182	199				
J. J.	Carroll	167					
M. J.	Cassano	146					
I.	Chancellor	251					
J. W.	Chappelow	168					
G. T.	Chisum	381					
D.	Chopping	298					
R. A.	Chorley	286	382				
J. W.	Clark	472					
W. C.	Clark	28	192				
D. H.	Close	252					
A. R.	Colgan	227					
L.	Collins	31					
D. M.	Condra	317					
T. R.	Connon	517					
J. F.	Coonrod	328	493				
D.	Cosley	228					
J. H.	Crenshaw	87					
L. L.	Crews	273					
F. W.	Cronn	204	274	315			
K. D.	Cross	229					
R. W.	Cumming	4	8				
J. G.	Curtin	59					
W. H.	Dana	123					
J. W.	Danaher	28					
J.	Davison	480					
K. H.	De Jong	89					
W. B.	DeBellis	230					
I.	DeBotton	88					
J. L.	DeCelles	147	210	275	355	383	432 453
F. E. D.	Dekker	90					
P. J.	Deliac	91					
J. P.	Desmond	488	538				
C. A.	Deutschle	93					
T. G.	Dobie	169					
T. E.	Dobry	184					
D. L.	Dohm	299					
L. L.	Dopping-Hepen	456					
A. R.	Doucette	276	300				
D. J.	Dougherty	65					
N.	Driscoll	170					
J. H.	Dwyer	277					
P. J.	Edmunds	301					
D. E.	Egan	302	356				
S.	Ehrlich	547					

J. E.	Eisele	303						
C. D.	Eliason	357						
N. C.	Ellis	122						
B. M.	Elson	200	473					
C. L.	Elworth	126						
J. H.	Emery	59						
H. L.	Ernst	329						
M. N.	Ernstoff	328	358	457				
J. H.	Ertzgaard	304						
D. N.	Fadden	384						
I.	Ferguson	60						
P. B.	Field	253						
C. S.	Finnerty	509						
E.	Fischer	385	433	438				
B. L.	Fister	268						
J. A.	Fitzgerald	171	172					
J. G.	Fox	60						
T. G.	Foxworth	173	232	330	359	508	513	
C.	Fragola	25						
L. H.	Frank	386						
M. L.	Frazier	434						
E. V.	Fretwell	432						
U.	Frieberg	174	539					
E. H.	Fritze	23						
D. E.	Fry	61						
H. V.	Fuller	305						
P. A.	Furr	191						
R. F.	Gabriel	47						
H. G.	Gaidsich	123						
P. D.	Gallaher	306						
J. P.	Galves	387						
J. H.	Gard	474						
W. B.	Gartner	148	233	331				
J. P.	Geddes	254						
N. D.	Geddes	409						
L. V.	Genco	493	517					
F. L.	George	544						
J.-F.	Georges	540						
C. P.	Gibson	360	435					
R. T.	Gill	476						
S. B.	Ginn	226						
A. P.	Ginsburg	436	489	493				
J. H.	Glover	92						
T.	Gold	32	33	48	93	94	124	149
		192	201	255	287			
K. W.	Goldstein	472						
M. W.	Goode	307						
J. E.	Goodson	356						
A.	Graube	252						
G. N.	Green	332						
M. R.	Green	61						
B. J.	Greenland	125						
W. F.	Grether	1						

J. G.	Guercio	361	390				
A.	Guimares	509					
D. J.	Gurney	380					
J.	Guttman	541					
K.	Hahn	388					
R. F.	Haines	333	361	362	363	389	390 433
		437	438	460			
C. H.	Hall	273					
W.	Halliday	287					
D.	Hameluck	554					
F. W.	Hamilton	439	475				
V. E.	Hamilton	24					
R. A.	Harlow	175					
R. L.	Harris	233	254	307			
T. J.	Harris	73	150				
R. L.	Harrison	477					
S. G.	Hasler	65					
H. H.	Hasselgring	151					
D. M.	Havron	16					
R. K.	Heffley	391					
E. L.	Heft	353	391				
J. C.	Hemmingway	477					
S. M.	Herlt	509					
D. E.	Hewes	234					
R. E.	Hillman	308					
G. A.	Hobe	458					
D. A.	Hodgson	176					
F. C.	Hoerner	235	236	393			
K. J.	Holden	34					
S.	Holmström	539					
H.	Hopkins	557					
D. O.	Horning	177					
G. W.	Hover	2					
J. C.	Hull	476					
R. A.	Hunt	306					
G. G.	Hupp	309					
C. L.	Hussey	152					
D. W.	Hussey	490					
J. E.	Hutchinson	257	278	310	542		
A.	Hyman	94	149				
H. P.	Iavecchia	364					
J. H.	Iavecchia	364	523	558			
G. P.	Intano	297	318				
M.	Ivins	394					
S. G.	Jackson	334					
P.	Jainski	178					
D.	Jarvi	459					
L. L.	Jenney	97	179				
W. F.	Jewel	391					
D.	Johnson	95					
R. E.	Johnson	7					
R. K.	Johnson	35					

R. W.	Jones	95			
R. A.	Juergens	395			
M. J.	Jullien	96			
W. N.	Kama	311			
R. S.	Kane	153			
J. S.	Karmarker	312			
C. R.	Kelley	49			
J. R.	Kelly	543			
A. E.	Kelvin	335			
J. M.	Ketchell	49	97		
R. M.	Kiltz	336	396		
F. A.	Kinder	313			
R. K.	Kirschner	279			
P. J.	Klass	17			
G.	Klopfstein	62			
S.	Knemeyer	74			
L.	Knotts	510			
D. D.	Korell	154			
C. L.	Kraft	126			
J. M.	Kraus	491			
G. G.	Kuperman	311			
R. V.	Kurowsky	265			
W. D.	Kyle	525			
	Lacombe	180			
F. J.	Lallman	352			
M.	Lambert	36			
G. L.	Lamers	280			
R.	Lami	98	155		
P. L.	Lamy	509			
J. C.	Lane	4	8		
	Larribiere	180			
J. K.	Lauber	477			
J.	Lavernhe	281			
J. A.	La Russia	181			
J. V.	Lebacqz	365	397		
R. D.	Lee	493			
E. F.	Leitner	460			
C. J. G.	Lewis	135			
H. J.	Lewis	509			
W. N.	Lewis	337			
J. L.	Lightstone	398			
G. B.	Litchford	99	100		
J.	Long	25			
M. G.	Long	338			
J. R.	Lowe	156	366	439	492
R. W.	Lowrie	440			
P.	Lowry	101			
R. B.	Lumsden	461			
R. J.	McCammack	299			
St. J.	McCloskey	237			
L. B.	McCormack	544			
R. C.	McCracken	123			

I. L.	McGrath	238					
J. J.	McGrath	229					
J. R.	Machin	282					
F. B.	MacIntosh	272					
R.	Mackie	239					
T.	McLane	18					
G. B.	McNaughton	526					
A. C.	McTee	182	190	331			
R. P.	Madero	317					
A. M. A.	Majenda	11					
E.	Malinski	441					
M.	Martin	283					
W. L.	Martin	311	478	488	493		
F. P.	Martin	127					
E.	Martino	25					
C. O.	Masters	500					
C. H.	Mattinson	37					
C.	Maureau	462					
D. B.	Middleton	258	284				
D. W.	Milam	434					
B.	Miller	128					
D. L.	Miller	443					
G. E.	Miller	451					
J. I.	Miller	501					
J. R.	Milligan	76					
J. H.	Mills	367					
T. S.	Momiyama	29	35				
S. J.	Monagan	442					
R.	Monroe	102					
P. F.	Mooney	26					
J. C.	Morrall	63	64				
P. E.	Morway	381					
D. L.	Moulton	172					
G. F.	Mussman	157					
J. M.	Naish	5	12	13	19	20	27
		39	40	50	51	75	77
		129	158	159	183	202	203
		399	443	444			
R.	Neeland	480					
R. L.	Newman	173	259	339	340	367	368
		392	445	446	463	464	480
		512	513	527	545	546	559
		561	562				
L.	Nordstrom	52					
J.	Norman	547					
P. A.	Noxon	41	53				
J. E.	O'Brien	275	341	432			
M. L.	Odle	241					
J. G.	Oliver	400	432	494	548		
E. W.	Opittek	242					
J. R.	Ornelas	492					
W. P.	Orrick	285					
B. K. E.	Outlaw	305					

C.	Owens	314							
E. A.	Palmer	204	205	274	277	315			
D. P.	Parks	243							
M.	Parrag	495	510						
J.	Payne	496							
R.	Peal	228							
H.	Pekich	401							
N.	Penney	104							
R. D.	Pepler	486							
R. F.	Perry	201							
L. H.	Person	543							
J. C.	Petit	447							
J. P.	Petit	370							
T. A.	Pfaff	487							
M. G.	Pfeiffer	28							
R. J.	Phaneuf	341							
C.	Plummer	260							
E. F.	Potter	18	124	130					
B. G.	Powers	514							
B. G.	Powley	497							
T. A.	Price	433	438						
R. H.	Pursel	261							
R. C.	Radford	365							
P. R.	Ramage	9							
W. E.	Ramsey	29							
R. J.	Randle	447							
K. N.	Rauch	287							
L.	Ravich	549							
A. M.	Ray	122							
J. C.	Raynal	370							
C. R.	Reede	54							
J.	Reiman	563							
J. M.	Reising	206							
R.	Ribiere	342							
G.	Rigobello	509							
R. H.	Riordan	262							
M. J.	Ripley	184							
P. A.	Roitsch	207							
A.	Roland-Bille	402							
J. M.	Rolfe	131	168						
R. R.	Ropelewski	263	343	403	448	465			
S. N.	Roscoe	65	303	364	371	404	405	447	
		476	528	550	551				
L. F.	Ruhl	498							
W.	Russel	185							
J. G.	Ryan	132							
J. J.	Ryan	500							
O. B.	St. John	105	133						
S. M.	St. Leger Sea	382							
A. S.	Santanelli	264							
B.	Schiff	372							
S.	Schifflett	449							

R.	Schilling	406	529					
B. L.	Schmidt	529						
D. L.	Schmidt	154						
W. C.	Schultz	106	107					
A.	Schwab	499						
R. W.	Schwartz	493						
G.	Schweizer	108						
J.	Schwelbe	265						
B. C.	Scott	455	477	500				
H. C.	Self	489	493					
C. A.	Semple	102						
D. J.	Sheehan	208						
R.	Shiel	51						
D. C.	Short	316	344	373				
J. J.	Shrager	266	374					
F. A.	Siciliani	70						
C. D.	Simmons	523						
W. T.	Singleton	134						
G. E.	Skelton	186						
G. R.	Sleight	112	135					
B. A.	Smith	407						
J. H.	Smith	187	209	286				
R. E.	Smith	442	479					
R. H.	Smith	408	409					
W. D.	Smith	410	487					
R. R.	Smullen	253						
R. P.	Snodgrass	66						
S. M.	Soliday	76						
J. P.	Sones	188						
J. A.	Sorenson	312						
D. R.	Sorum	267						
P.	Stager	554						
J. W.	Steenblik	450	514	564				
R. F.	Stengel	451						
M. E.	Stormo	136						
C. L.	Stout	77	109					
P. H.	Strudwick	49						
H.	Suisse	411						
R. L.	Sulzer	186						
L. G.	Summers	501						
O.	Sviden	42	43					
W. F.	Swartz	146	317					
L. E.	Swartzendruber	189						
R. M.	Tamura	67						
M. H.	Tapia	318						
H. L.	Task	493						
R. K.	Taylor	182	191					
R. M.	Taylor	516	565					
G. J.	Terhune	319	345	355	375	376	331	412
		413	414	432	452	453		
R. L.	Therrien	210	211					
C. L.	Tipton	78						
M. J.	Tkach	466						

D. M.	Trousdale	552		
J. E.	Tucker	244		
P. E.	Tyler	191		
T. E.	Utz	299		
L. R.	Uyeda	47		
M. F.	Von Wieser	129	212	
D.	Vreuls	102		
D. P.	Wagner	480		
R. M.	Walchli	79	255	287
F. L.	Wallace	110		
L.	Wallis	80		
D. J.	Walters	111		
J.-C. L.	Wanner	245	288	
R.	Warren	517		
E. F.	Weener	384		
W. L.	Welde	415	463	
R. G.	White	249		
T. C. D.	Whiteside	55		
V.	Wilckens	246		
R. C.	Williges	303	306	
F. M.	Wilson	81		
J. W.	Wilson	213	308	416
W.	Wilson	493		
R. N.	Winner	346		
B. S.	Wolfe	112		
P.	Woodburn	417		
J. D.	Workman	15	48	
K. R.	Yenni	307		
G. L.	Yingling	74		
P.	Yiotis	192		
P. E.	York	285		
M.	Zebrowski	193		

Report Numbers

AD-613344	47		
AD-648301	78		
AD-703683	150		
AD-726280	186		
AD-726643	189		
AD-742496	164	169	191
AD-744334	192		
AD-747654	199		
AD-787605	252		
AD-825633.....	73		
AD-909841L	223		
AD-913524L	244		
AD-916572	219		
AD-920142L	268		
AD-921800L	253		
AD-A044484	337		
AD-A074415	381		
AD-A080047	386		
AD-A085310	440		
AD-A135853.....	496		
AD-B007975L	265		
AD-D002697	313		
AFAL TR-73-50	227		
AFAL TR-73-215	242		
AFAMRL TR-80-116	445		
AFAMRL TR-83-95	493		
AFAMRL TR-84-18	517		
AFFDL FS-68-28	118		
AFFDL FS-69-58	140		
AFFDL FS-69-59.....	141		
AFFDL FS-69-60	142		
AFFDL FS-69-62	143		
AFFDL FS-70-61	162		
AFFDL FS-72-67	220		
AFFDL FS-72-68	221		
AFFDL FS-76-1	323		
AFFDL TM-72-9-FGR	206		
AFFDL TM-72-11-FGR	197		
AFFDL TR-76-52	317		
AFFDL TR-78-154.....	409		
AFFTC TR-73-48	224		
AFFTC TR-76-51	334		
AFHRL TR-71-20	171		
AFHRL (FT) TR-72-55	172		
AFIFC LR-76-2	296		
AFIFC TR-73-7	241		
AFIFC TR-76-1	318		
AFIFC TR-76-4	296		
AFIT GAE/AA/83S-5	496		
AFM-51-37.....	555		

[illegible]

Crew Systems TM-85-13	527	
Crew Systems TM-86-15A	545	
Crew Systems TM-86-22	546	
Crew Systems TM-87-04	559	
Crew Systems TR-77-02	339	
Crew Systems TR-78-08	369	
Crew Systems TR-79-20	446	
Crew Systems TR-84-04	513	
Crew Systems TR-87-12	560	
Crew Systems TR-87-13.....	561	
Crew Systems TR-87-14	562	
Dassault DGT-16433	411	
DFVIR F8-78-38	422	
Douglas DP-4951	103	
Elliott 29/11/2/BO5	135	
Elliott ADD-229	115	
FAA AC-91-25A	216	
FAA CT-82-92	500	
FAA EM-74-12	266	
FAA RD-68-13.....	102	
FAA RD-71-60	177	
FAA RD-73-168	243	
FAA RD-73-210	261	
FAA RD-77-166	332	
FAA RD-78-31	374	
FAA SS-73-25	228	
Fairchild 160S417001B	320	
Flight Dyn. 404-0071	491	
Flight Dyn. 404-0097	502	
Gen. Dyn. 16PR1467B.....	454	
Gen. Dyn. 16PR1624A	468	
Gen. Dyn. 16PR1628E	482	
Gen. Dyn. 16PR3927A	469	
Gen. Dyn. 16ZE017C	378	
Grumman A55DCVAD051	530	
Hughes D-7123	327	
Hughes HAC-P76-527R	346	
Hughes TR-2732-01/40	46	
Human Sci. Res. 421-5R	16	
ICAO AWOP-B10/16.....	155	
IEE CP-80	168	188
IFALPA 74C95	237	
IFALPA L68C20.	98	
IFALPA L76C228	304	
IPIS 71-3	182	
IPIS 72-2	190	
JANAIR 680505	97	
JANAIR 680712	149	
JANAIR 700407	201	
JANAIR D228-420-010.....	59	

JET 784/2M/DL	569
JET DL585K2	568
Kaiser TR-HFR-9765-1	49
Kaiser 78-3945	426
Kaiser C78-3514	503
Link TR-59-22	7
MAC OTO-15-2-73	267
Marconi EA-08-0007-D01	349
McDonn.-Doug. A3589	292
McDonn.-Doug. A4277-4.....	427
McDonn.-Doug. A5769	398
McDonn.-Doug. C1-E87-FS-251	498
McDonn.-Doug. J0812	156
McDonn.-Doug. J0878	159
McDonn.-Doug. J1409	103
MIL-F-08785C	428
MIL-D-81641(AS)	217
MIL-D-817213	520
MIL-STD-884C	294
MIL-STD-1787.....	522
N84-20566	514
NADC-75267-40	285
NADC-79216-60	381
NADC-85165-60	559
NADC-AM-7042	152
NADC SD-6940	132
NAFI TR-1557	151
NAMRL Monograph 23	356
NAMRL SR-79-6	386
NASA CP-2060.....	353
NASA CR-189	30
NASA CR-2359	233
NASA CR-2687	312
NASA CR-3137	384
NASA CR-66912	153
NASA CR-73495	148
NASA CR-117135	179
NASA CR-152294	391
NASA HUD Report 1	362
NASA HUD Report 2.....	363
NASA HUD Report 3	361
NASA HUD Report 5	385
NASA HUD Report 7	433
NASA HUD Report 9	391
NASA HUD Report 10	438
NASA HUD Report 11	431
NASA HUD Report 12	444
NASA HUD Report 15	397
NASA SP-320	204
NASA TM-75205.....	198

NASA TM-78565	397
NASA TM-78512	362
NASA TM-78517	363
NASA TM-78536	361
NASA TM-78771	352
NASA TM-81167	444
NASA TM-81199	431
NASA TM-86034	514
NASA TM-X-3264	275
NASA TM-X-3273.....	278
NASA TM-X-62188	205
NASA TM-X-72811	305
NASA TM-X-73170	306
NASA TM-X-82187	225
NASA TN-D-5299	123
NASA TN-D-7456	235
NASA TN-D-7760	259
NASA TN-D-8026	284
NASA TP-1276	308
NASA TP-1499.....	399
NASA-TP-1550	443
NASA TP-1635	446
NASA TP-1711	433
NASA TP-1720	438
NASA TP-1796	460
NASA TP-1815	476
NASA TP-2300	507
NATC FT-2211-15R-63	29
NATC FT-2222-65R-64	35
NATC SY-23R-75.....	287
NATC SY-24R-75	295
NATC SY-33R-80	449
NATC WST-069R-74	253
NATC WST-134R-71	184
NATRADEV CEN TR-783-1	28
NAVAIR 01-AV8A-1	585
NAVAIR 01-F14AAA-1	586
Norden 1232-R-0006	208
North Am. EM-5773	6
North Am. SEG-TR-66-67.....	76
NTSB AAS-73-2	247
NWC TN-404-176	273
OSU APL-1-81	463
PACAF Pamphlet-51-11	522
RADC TR-76-3	299
RAE CP-21663	12
RAE EL1486	3
RAE ONRL-M-4-69	127
RAE TM-BLEU-123	64
RAE TM-FS-173.....	360

RAE TN-77050	332
RAE TN-IAP-1132	13
RAE TN-IAP-1138	19
RAE TR-64026	38
RAE TR-65254	51
RAE TR-66083	61
RAE TR-66195	63
RAE TR-69236	119
RAE TR-71141	175
RAE TR-73080.....	225
RAE TR-81025	461
RAE Translation 1545	178
Rank BK-40536	268
SAAB TN-58	52
SAAB TN-61	71
SAAB YK-37-64.B7	42
SAAB YK-37-64.B8	43
SAAB YK-37-65.R1	45
SAE ARP-4053/8	553
SAE AS-8034.....	483
SAE Paper 847B	41
SAE Paper 700210	154
SAE Paper 710441	185
SAE Paper 730951	236
SAE Paper 740347	256
SAE Paper 831445	485
SAE Paper 831451	488
SAE Paper 831533	518
SAE Paper 850902	525
SAE Paper 861730.....	542
SAE Paper 861732	538
SAE Paper 861733	548
SAE Paper 861803	543
SFENA A70-BY-981	504
Smiths Industries SI-1002	440
Sperry CA-1245-0206	18
Sperry SGD-4277-0190	93
Sundstrand 020-0026-001	218
Sundstrand 060-1624	348
Sundstrand 070-0676-001.....	195
Sundstrand 070-0936-001B	322
Sundstrand 7101-2499-802	269
TAC TR-70A-113F	196
Thomson-CSF AVG/OP-73/169C	248
Thomson-CSF L75C124	251
TO-1A-7D-1	581
TO-1A-10A-1	582
TO-1A-15A-1	583
TO-1A-16A-1	584
TSEAA-694-88.....	1

United Data 060-0483-001A	161
U. of Illinois ARC-76-16	303
U. of Illinois Eng Psy-78-4	364
U. of Illinois Eng Psy-79-4	404
US Patent 3,128,623	32
US Patent 3,945,716	313
USAFE Pamphlet-51-9	522
Vought 2-14000/4R-10	271
Vought 204-16-19C	83
6594th Test Group LTR-76-8....	324

Subject Index

HUD Flight Test	29	35	51	61	65	88	170	171
	172	175	184	190	224	225	249	255
	256	267	280	295	304	307	309	318
	322	324	334	339	353	357	380	391
	394	415	434	442	448	461	495	496
	500	510	514	527	535	536	560	561
Simulator Studies	12	39	40	42	45	93	102	109
	117	122	126	132	174	204	205	225
	233	234	244	256	274	277	284	307
	315	331	333	335	338	354	362	370
	388	389	390	391	408	410	413	414
	435	437	443	444	453	477	496	507
	514	516	539	562				
Contact Analog	1	2	17	43	46	52	62	148
	231	232	246	251	261	278	287	319
	327	413	414	421	445			
Symbolic Displays	1	2	13	19	20	27	38	83
	95	103	115	129	183	202	203	224
	274	349	386	427				
EADIs	46	76	97	101	111	154	266	294
	327	346	352	384	416	458	486	501
	507	521	531	537	542	544	553	564
Control Laws	32	33	111	115	156	158	174	273
	366	408	409	430	431	439	442	443
	444	446	451	462	471	472	479	492
	495	500	509	511	513	535	536	544
	560							
Flying Qualities	245	408	409	428	430	451	471	472
	479	495	496	509	510	513	514	527
	535	536	560					
Visual Guidance	32	33	43	175	195	200	202	207
	218	364	439	443	444			
Superimposed Fields	12	39	40	47	431	443		
Accuracy/Disparity Studies	55	94	124	149	201	333	360	433
	435	493	517	561				
Brightness	47	49	110	177	178	311		
Visual Accommodation	55	94	360	364	371	381	404	405
	447	460	476	493	524	528	547	549
	550	559						

Peripheral Vision Displays	11	23	182	189	190	556	557	563
Target Detection	371 528	405 547	433 550	436 551	438	489	493	517
Pilot Landing Problems	3 86 148 211 270 317 380 548	4 106 155 212 275 325 383 550	8 107 167 216 288 326 412 551	67 114 176 231 289 342 432 561	69 126 183 237 290 345 445	74 138 199 239 307 373 446	84 144 205 247 312 375 512	85 147 210 262 315 376 540
ILS Approaches (All Weather Landing)	22 81 128 179 212 272 345 399 423 461 529	54 82 129 180 213 275 347 402 431 477 538	63 84 133 183 231 291 354 406 432 491 540	64 85 137 185 237 304 355 407 439 492 559	69 86 148 199 245 310 359 412 445 498 561	70 106 155 203 247 312 362 413 446 500 564	74 107 167 210 257 317 375 414 453 525 567	77 114 173 211 261 342 376 417 455 527
Visual Cues Used in Landing	4	16	65	176	177	216	262	303
HUD Failure Detection	40 440 546	38 445 555	56 446	208 475	275 480	387 513	402 522	432 523
Training Issues	46 419 497	171 420 505	172 445 510	196 446 522	295 463 555	324 464	340 491	351 495
Pilot Surveys	8	30	242	296	367	446	513	
Holographic HUDs	73 494	150 502	357 538	473	474	481	490	491
Tactical Applications	83 294 484 586	222 309 490	223 334 560	224 349 581	250 395 582	276 426 583	282 470 584	292 478 585
Low-Level Flight	36	117	478	530				
Spatial Disorientation	44 446 522 545 562	164 459 524 546 563	166 463 526 550 565	169 464 530 551	186 497 533 555	191 505 534 556	193 513 539 558	296 516 541 559

Accident Reviews	326	342	505	533	534			
Wind Shear	331	362	438	512	539	543	548	552
Reviews of HUD	15	34	57	60	79	97	151	188
State-of-the-Art	197	259	266	285	296	332	356	359
	374	386	396	399	446	462	463	464
	499	508	513	519	549	553	555	564
Production HUDs	72	83	91	116	118	122	132	136
	140	145	170	195	197	207	218	220
	222	239	248	254	260	270	271	273
	276	292	322	349	350	378	386	398
	421	427	429	434	439	470	475	482
	485	488	491	502	503	511	531	532
	567	568	569	570	571	572	573	574
	575	576	577	578	579	580	581	582
	583	584	585	586				
A-4	386	470						
A-6	184	531	558					
A-7	83	122	170	222	224	242	254	271
	273	295	386	581				
A-10	309	320	377	403	582			
AV-8	140	292	386	440	585			
F-14	132	145	276	300	386	531	586	
F-15	220	250	260	334	459	570	583	
F-16	349	378	434	454	468	469	482	584
F-18	398	421	427	466	503	541	558	
NT-33/DEFT	415	442	495	496	509	510	527	535
	536	560	561					
T-38/Light Line	279	318	577					
Jaguar	530							
VAM	161	162	195	200	207	218	239	267
	270	316	321	329	344	350	373	422
	578							
MARS	269	322	324	339	353			
Space Shuttle	233	394	485	515				
Microvision	31	37	41	53	68	261	323	

MD-80	423	429	439	465	475	510	529	
PC-9/JET 9000	545							
FDI-1000	473 515	481 525	488 538	491 552	494 559	498 567	502	512
TC-193/CV-91	72 347	91 402	116 445	118 580	136	180	248	343
TC-121/TC-125	206 400	232 413	237 414	251 421	278 579	298	304	343
JET 1000/9000	532	545	568	569				
Boom Operator HUD	368	369	401					
Military HUD Specifications	83 519	97 520	217 521	292 531	294	386	470	513
Civil Standards	97	383	513	554				
V/STOL Applications (non helicopter)	108 244 329	127 249 335	140 255 370	192 258 386	204 277 397	214 284 440	235 287 585	236 292
Helicopter Applications	6 392	53 397	59 426	192	264	269	339	353
General Aviation Applications	21	186	234	256	305	307	525	