

*ite technical note techn*

AD-A197 179

2

DTIC FILE COPY

# LORAN C Offshore Flight Following (LOFF) in the Gulf of Mexico

Frank Lorge

February 1988

DOT/FAA/CT-TN88/8

This document is available to the U.S. public  
through the National Technical Information  
Service, Springfield, Virginia 22161.



US Department of Transportation  
**Federal Aviation Administration**

Technical Center  
Atlantic City International Airport, N.J. 08405

DTIC  
ELECTE  
JUL 05 1988  
S D  
E

**NOTICE**

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for the contents or use thereof.

The United States Government does not endorse products or manufacturers. Trade or manufacturer's names appear herein solely because they are considered essential to the object of this report.

Technical Report Documentation Page

|  |  |   |  |
|--|--|---|--|
| 1. Report No.<br>DOT/FAA/CT-TN88/8   | 2. Government Accession No.                          | 3. Recipient's Catalog No.  |  |
| 4. Title and Subtitle<br>LORAN C OFFSHORE FLIGHT FOLLOWING (LOFF) IN THE GULF OF MEXICO  |  | 5. Report Date<br>February 1988   | 6. Performing Organization Code<br>ACT-140 |
| 7. Author(s)<br>Frank Lorge  |  | 8. Performing Organization Report No.<br>DOT/FAA/CT-TN88/8  |  |
| 9. Performing Organization Name and Address<br>Federal Aviation Administration<br>Technical Center<br>Atlantic City International Airport, NJ 08405  |  | 10. Work Unit No. (TRAIS)   | 11. Contract or Grant No.<br>T0702K        |
| 12. Sponsoring Agency Name and Address<br>Department of Transportation<br>Federal Aviation Administration<br>Program Engineering and Maintenance Service<br>Washington, DC 20590   |  | 13. Type of Report and Period Covered<br>Technical Note<br>February 1988  |  |
| 15. Supplementary Notes  |  |   |  |
| 16. Abstract<br><br>The Federal Aviation Administration conducted simulation and flight tests on the Loran C Offshore Flight Following (LOFF) equipment installed in the Houston Air Route Traffic Control Center (ARTCC). Overall results of the LOFF test program were favorable. The system performs in a predictable and reasonable manner. Performance of the system is comparable to that of radar, although there is a slight difference in accuracy between the two. |  |   |  |
| 17. Key Words<br>Loran C Flight Following (LOFF)<br>Gulf of Mexico<br>Loran<br>Automatic Dependent Surveillance (ADS)  |  | 18. Distribution Statement<br>This document is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22161 |  |
| 19. Security Classif. (of this report)<br>Unclassified   | 20. Security Classif. (of this page)<br>Unclassified | 21. No. of Pages<br>68  | 22. Price                                  |

TABLE OF CONTENTS

|  | Page |
|--|------|
| EXECUTIVE SUMMARY                        | vii  |
| INTRODUCTION                             | 1    |
| BACKGROUND                               | 2    |
| EDARC                                    | 5    |
| LOFF Sector                              | 5    |
| DATA COLLECTION                          | 5    |
| Simulation                               | 7    |
| Flight Test                              | 9    |
| DATA REDUCTION AND ANALYSIS              | 9    |
| Infotec Converter Accuracy               | 9    |
| EDARC Conversion Accuracy                | 16   |
| EDARC Dynamic Accuracy                   | 16   |
| Comparative Performance in Overlap Areas | 17   |
| Loran Accuracy                           | 17   |
| VHF Data Link Coverage                   | 17   |
| Time Delays                              | 17   |
| RESULTS                                  | 18   |
| Infotec Converter Accuracy               | 18   |
| EDARC Conversion Accuracy                | 18   |
| EDARC Dynamic Accuracy                   | 41   |
| Comparative Performance in Overlap Areas | 42   |
| Loran Accuracy                           | 44   |
| VHF Data Link Coverage                   | 44   |
| High Altitude Probe                      | 57   |
| Time Delays                              | 57   |
| Operational Evaluation -                 | 58   |
| CONCLUSIONS                              | 59   |
| RECOMMENDATIONS                          | 61   |



|                    |                                     |
|--------------------|-------------------------------------|
| Accession For      |                                     |
| NTIS GRA&I         | <input checked="" type="checkbox"/> |
| DTIC TAB           | <input type="checkbox"/>            |
| Unannounced        | <input type="checkbox"/>            |
| Justification      |                                     |
| By _____           |                                     |
| Distribution/      |                                     |
| Availability Codes |                                     |
| Dist               | Avail and/or<br>Special             |
| A-1                |                                     |

## LIST OF ILLUSTRATIONS

| Figure |  | Page |
|--------|--|------|
| 1      | LOFF Block Diagram                                   | 3    |
| 2      | LOFF Sector  | 6    |
| 3      | Test Configuration for Simulation                    | 8    |
| 4      | Flight Test Route - QHI Orbit and VHF Coverage       | 10   |
| 5      | Flight Test Route - QVM VHF Coverage                 | 11   |
| 6      | Flight Test Route - QVM Orbit and AEX Overlap Probe  | 12   |
| 7      | Flight Test Route - GLS Orbit and Radar Overlap Area | 13   |
| 8      | Flight Test Route - QIC VHF Coverage                 | 14   |
| 9      | Flight Test Route - Entire LOFF Sector               | 15   |
| 10     | EDARC Simulation Area - 100 Feet Altitude            | 20   |
| 11     | EDARC Simulation Area - 1000 Feet Altitude           | 21   |
| 12     | EDARC Simulation Area - 4900 Feet Altitude           | 22   |
| 13     | Radar-LOFF Overlap Area at 5000 Feet Altitude        | 43   |
| 14     | TDL-711 Radial Error - 9/10/87                       | 45   |
| 15     | TDL-711 Radial Error - 9/13/87                       | 46   |
| 16     | TDL-711 Radial Error - 9/14/87                       | 47   |
| 17     | TDL-711 Radial Error - 9/15/87                       | 48   |
| 18     | TDL-711 Radial Error - 9/20/87                       | 49   |
| 19     | TDL-711 Radial Error - 9/21/87                       | 50   |
| 20     | TDL-711 Radial Error - 9/22/87                       | 51   |
| 21     | TDL-711 Radial Error - 9/23/87                       | 52   |
| 22     | TDL-711 Radial Error - 9/24/87                       | 53   |
| 23     | LOFF VHF Coverage - 1000 Feet Altitude               | 54   |
| 24     | LOFF VHF Coverage - 3000 Feet Altitude               | 55   |
| 25     | LOFF VHF Coverage - 5000 Feet Altitude               | 56   |

LIST OF TABLES

| Table |  | Page |
|-------|--|------|
| 1     | LOFF Data Message  | 4    |
| 2     | Infotec Conversion Accuracy  | 19   |
| 3     | EDARC x-y Position in Miles at --<br>100 Feet Altitude (6 sheets)  | 23   |
| 4     | EDARC x-y Position in Miles at --<br>1000 Feet Altitude (6 sheets) | 29   |
| 5     | EDARC x-y Position in Miles at --<br>4900 Feet Altitude (6 sheets) | 35   |
| 6     | EDARC Variation in Nautical Miles                                  | 41   |
| 7     | EDARC Dynamic Accuracy in Nautical Miles                           | 42   |
| 8     | Radar-LOFF Comparison in Nautical Miles                            | 42   |
| 9     | ONI-7000 Accuracy in Nautical Miles                                | 44   |
| 10    | TDL-711 Accuracy in Nautical Miles                                 | 44   |
| 11    | LOFF Radial Coverage in Nautical Miles                             | 57   |
| 12    | Infotec Time Delays  | 57   |

## EXECUTIVE SUMMARY

This report describes results of tests conducted by the Federal Aviation Administration (FAA) Technical Center to evaluate the Loran Offshore Flight Following (LOFF) system. Simulation and flight test were used to measure system performance under operational conditions.

The LOFF system is the first implementation of Automatic Dependent Surveillance (ADS) by the FAA to track aircraft. The system uses aircraft derived position as determined by Loran, transmitted by very high frequency (VHF) data link for use by air traffic controllers. A converter unit has been installed in the Houston Air Route Traffic Control Center (ARTCC) to process incoming LOFF messages and convert them into a radar data format. The results of this conversion are input to the Enhanced Direct Access Radar Channel (EDARC), which presents the aircraft as a conventional radar target. The system provides coverage in areas not currently served by radar, offshore in the Gulf of Mexico.

Simulated inputs were used during testing to determine accuracy of the LOFF converter, to measure timing delays, and to relate aircraft position in latitude longitude to a displayed position as seen by the controller. Flight tests were conducted to determine VHF coverage using the system, to measure Loran accuracy in the area, to compare dynamic performance with nondynamic performance of the EDARC system, and to provide an overall evaluation of the operational system.

Data reduction and analysis are described in the report, as well as an operational evaluation and identification of issues which must be addressed before full implementation of the system can take place.

Results showed that performance of the system differed from radar. However, these differences were fairly small and will not impact service in the offshore area where radar is not available. The LOFF system provides a benefit by tracking aircraft in an area where this service would otherwise be unavailable.

## INTRODUCTION

This report describes a test conducted by the Federal Aviation Administration (FAA) Technical Center to evaluate the Loran Offshore Flight Following (LOFF) system and LOFF equipment currently installed in the Houston Air Route Traffic Control Center (ARTCC). The testing involved simulation of LOFF inputs and flight testing to quantify system performance under operational conditions.

The LOFF system is the first implementation of Automatic Dependent Surveillance (ADS) used by the FAA to track aircraft. Systems of this type use aircraft-derived position, transmitted over a data link, for display to an air traffic controller. Further development of systems of this type will provide air traffic control (ATC) automation and potentially reduce separation requirements in areas not currently served by radar.

The implementation of LOFF was undertaken by the FAA in order to serve the needs of offshore helicopter operators in the Gulf of Mexico. A large number of aircraft operate at low altitudes over the gulf, outside of radar coverage. Current Instrument Flight Rules (IFR) require manual (procedural) separation of aircraft based on very large separation criteria. Procedures require that blocks of airspace be reserved in which only one aircraft at a time is permitted. Traffic density in IFR conditions is, therefore, very low due to these large separation requirements.

LOFF uses a Loran navigational receiver to provide a position output which is transmitted over a very high frequency (VHF) data link using aircraft radios and existing remote communications facilities. A converter unit has been installed in the Houston ARTCC which converts the incoming LOFF message to radar message format. This message is then input to the Enhanced Direct Access Radar Channel (EDARC) where targets are tracked and prepared for display to controllers.

The primary purpose of the testing described in this report was to quantify the conversion accuracy of the LOFF equipment in the Houston ARTCC. Secondary objectives included gathering of operational data for use by Air Traffic organizations in developing separation standards and procedures for use of LOFF for ATC purposes.

Specific objectives were:

1. To measure conversion accuracy of the installed equipment relative to existing specifications for radar accuracy performance.
2. To determine the registration of latitude/longitude (lat/long) coordinates to system x-y coordinates as computed by EDARC.
3. To determine coverage limits of the system using existing FAA communications facilities offshore over the Gulf of Mexico.
4. To determine the relative performance of the LOFF system as compared to existing radar serving the areas in which coverage of the two systems overlap.
5. To measure accuracy of the Loran receivers currently approved for en route IFR use as required for the LOFF system.

6. To conduct an operational evaluation of the system in order to determine its suitability for use as an ATC tool.

#### BACKGROUND

LOFF is a concept developed primarily for use by offshore helicopter operators in the Gulf of Mexico. It is used for aircraft scheduling and position reporting. The FAA became interested in the system because of its potential to provide a cost-effective means of aircraft surveillance in areas not currently served by radar. The Houston ARTCC, which handles a large amount of helicopter traffic offshore, has a strong requirement for a system of this type.

Loran-C is a navigation system which uses low frequency transmission of timed, coded pulses to provide highly accurate position determination. Because Loran is not a line-of-site system, but is available over a large geographical area at all altitudes, it has become a very popular navigation system among helicopter operators. Helicopters are often required to operate in remote areas not served by conventional NAVAIDS. Loran is used in both the Visual Flight Rules (VFR) and IFR environments to provide en route navigation effectively and affordably.

The LOFF system as currently implemented utilizes existing offshore VHF communications facilities operated by the FAA for the transmission of LOFF data. Users must be equipped with an approved Loran receiver and an interface unit which converts position information into a LOFF message for transmission. The message is input to a standard aircraft VHF radio using voice frequencies assigned to the Houston ARTCC. A converter unit has been installed in the Houston Center which converts the LOFF data message into the same format as a conventional radar message. This message is sent to the EDARC, which processes it for display. A block diagram of the system is shown in figure 1.

Two types of Loran receivers are approved for en route use in the Gulf of Mexico. The TDL-711 receiver was first manufactured by Teledyne, Incorporated, in the mid-1970's. It is a single chain receiver which includes three Loran stations in its navigational solution. The ONI-7000, available from Offshore Navigation, Incorporated (also sold as the ANI-7000, from Advanced Navigation, Incorporated) can track as many as eight stations from up to four Loran chains simultaneously. This allows it to overcome some of the deficiencies of single-chain receivers. This receiver is not as susceptible to baseline extension errors and is usable throughout a larger service area because of its use of multiple chains.

The LOFF message consists of aircraft position data in lat/long aircraft altitude as input by the pilot or encoding altimeter, LOFF code (similar to radar beacon code), and update rate code. The format of the message is shown in table 1. Message data are encoded using the American Standard Code for Information Interchange (ASCII), transmitted at 1200 baud.

The LOFF concept has been developed and is in use by several operators to satisfy their own requirements. Commercially available hardware is available for both the aircraft installation and ground based display. Also, a large number of operators exist in the gulf who are currently equipped with Loran-C receivers.

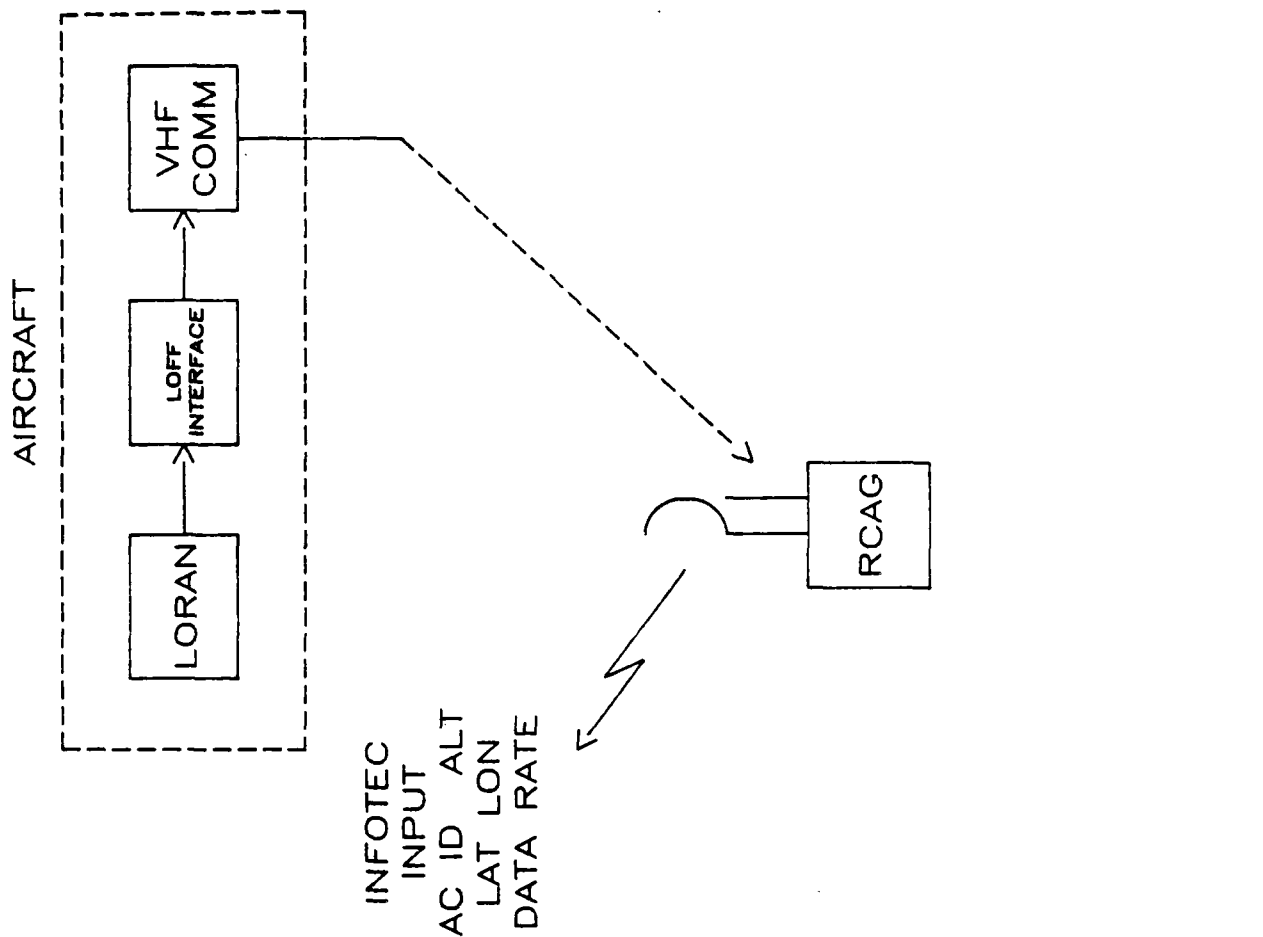


FIGURE 1. LOFF BLOCK DIAGRAM

TABLE 1. LOFF DATA MESSAGE

| <u>Character Number</u> | <u>Data Description</u>         |
|-------------------------|---------------------------------|
| 1                       | Begin Message Character (>)     |
| 2-4                     | Helicopter Identifier (ID) Code |
| 5                       | Repetition Rate                 |
| 6                       | Status Word*                    |
| 7-12                    | Loran C Derived Latitude        |
| 13-18                   | Loran C Derived Longitude       |
| 19-21                   | Reported Altitude               |
| 22                      | End Message Character (})       |

\*Status Word

| <u>Bit Number</u> | <u>Bit Value Description</u>   |
|-------------------|--|
| 0                 | Both bits are (0) for normal transmission.<br>or (1) for manual/emergency mode |
| 2                 | (0) for TD mode, (1) for lat/long mode   |
| 3                 | Master   |
| 4                 | Secondary A (0) for Float  |
| 5                 | Secondary B (1) for Track  |
| 6                 | Reported Altitude (0) for Manual Entry<br>(1) for Encoding Altimeter           |
| 7                 | (ODD) Parity bit   |

Many of these also have LOFF equipment in their aircraft. The only new equipment required to complete the system was a converter unit in the ARTCC which would be compatible with existing ATC display equipment. The FAA contracted Infotec Development Corporation to design and build a converter unit which would accept the LOFF message from existing communications channels, convert the Loran position data to a radar format, and provide the converted data for input to existing radar channels.

#### EDARC.

The EDARC is a system developed as a backup to the National Airspace System (NAS) primary ATC computer system. It consists of processors and software which provide aircraft tracking, flight plan storage, and target display information for use in the event of a failure of the primary system.

The EDARC display appears very similar to that of the primary system, although its capabilities are much more limited. The radar input conversion and target tracking capabilities are also very similar to the primary system. EDARC was selected for use with the LOFF system because of its availability for testing and operations which coincided with the implementation of the NAS computer replacement program.

The system accepts inputs from NAS radar equipment and converts them into x-y coordinates in the geometric system plane. This plane is arbitrarily defined to be tangent to the earth at a fixed point. Distances from the tangent point are calculated from stereographic projections of aircraft position and displayed to controllers. The x coordinate corresponds to local east at the tangent point, and the y-coordinate corresponds to local north.

EDARC tracks each aircraft using a pair of alpha-beta trackers. Independent trackers run in the x and y coordinates of the system plane.

#### LOFF SECTOR.

The LOFF sector is shown in figure 2. The area extends roughly from 27°30' to 29° of latitude and 90° to 96° of longitude. The sector extends vertically from the surface to 5000 feet mean sea level (m.s.l). The shaded portion near Houston is an exclusion area in which the TDL-711 Loran receiver is not certified. Coverage is provided throughout the sector from the Southeast U.S. Loran chain.

There are four sites which receive LOFF transmissions and send them to the Houston Center. These are at Galveston, Texas (GLSA), Intracoastal City, Louisiana (QIC), and on offshore oil rigs in the High Island (QHI) and Vermillion (QVM) areas of the gulf.

#### DATA COLLECTION

Data collection was conducted in two parts: simulation and flight test. Simulation was used, where possible, in order to fully test the system in the most economical manner. The LOFF system, in particular, lends itself to this type of testing because there are a finite number of possible inputs to the

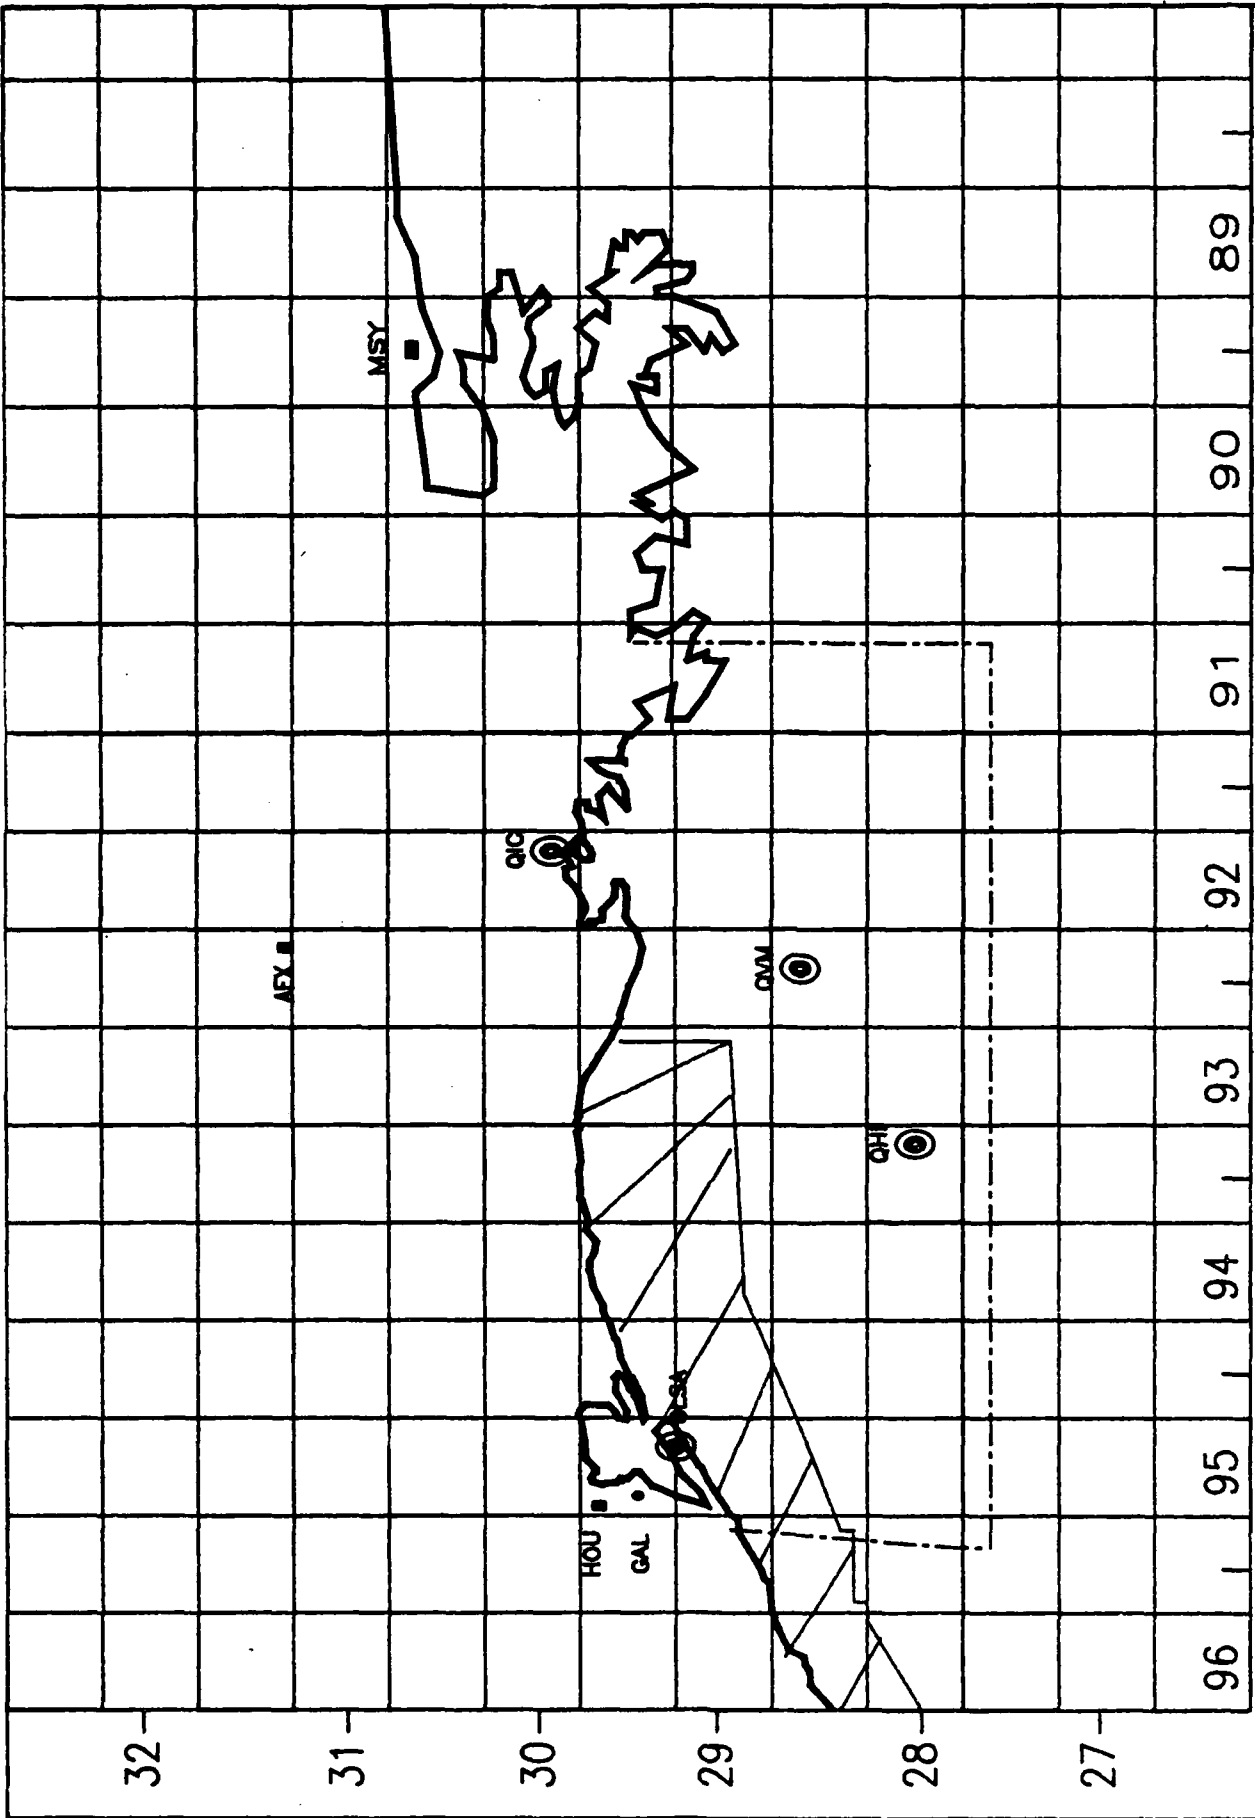


FIGURE 2. LOFF SECTOR

system. Flights were conducted to determine the limits of coverage of the existing communications facilities using LOFF equipment, to verify simulation results, to measure Loran accuracy, and to determine relative performance in radar-LOFF overlap areas.

#### SIMULATION.

The LOFF message is fairly easy to simulate with a low rate serial data line driven by computer. This procedure allows extensive testing in a reasonable time, as well as providing a means of isolating the converter from all other components of the system.

The test procedure was described in Technical Note DOT/FAA/CT-TN86/17 published in June 1986. The test was modified slightly during EDARC testing due to the difficulties associated with equipment scheduling in the operational environment of the Houston Center. The original test procedure was intended to collect data to determine the statistically significant variations in performance throughout the LOFF sector. However, the lack of data reduction software for EDARC recordings did not permit this analysis to be carried out during data collection. Data were collected at much closer spacing than the anticipated requirement in order to compensate for this problem.

The simulation test configuration is shown in figure 3. A Flite-Trak 600 processor was used to simulate the LOFF input data stream. This is a commercially available unit designed to accept and process LOFF messages which has been specially modified to generate LOFF messages. The Flite-Trak 600 also has the capability to record input data on magnetic disk. The unit is manufactured by Offshore Navigation, Inc. (ONI). In addition, a dynamic simulator designed for in-house use by ONI was also leased for the simulation tests. This unit has the capability to generate up to 30 simultaneous LOFF messages at an update interval of 15 seconds, and move targets at user selected rates, headings, and altitudes.

The Flite-Trak 600 was used to generate a grid of 50 targets spaced at a regular interval. A group of 50 messages corresponding to these targets was repeated every 15 seconds. This allowed repetitive inputs for use in examining the conversion accuracy of EDARC without dynamic tracker effects, and to verify that the Infotec converter maintained a deterministic output. This configuration was used primarily to determine EDARC grid spacing in system coordinates for a particular lat/long spacing of inputs.

Infotec conversion accuracy data were collected throughout the LOFF sector, extending from 26° to 29° north latitude and from 90° to 96° west longitude. EDARC data were collected throughout a part of the sector extending from 27°30' to 29° in latitude and 90° to 96° in longitude. Site adaptation of the entire LOFF sector had not yet been accomplished at the time of simulation testing, precluding the collection of data throughout the sector. However, because EDARC is a certified system which has already undergone its own testing, it was determined that the amount of data collected was sufficient for purposes of the LOFF tests.

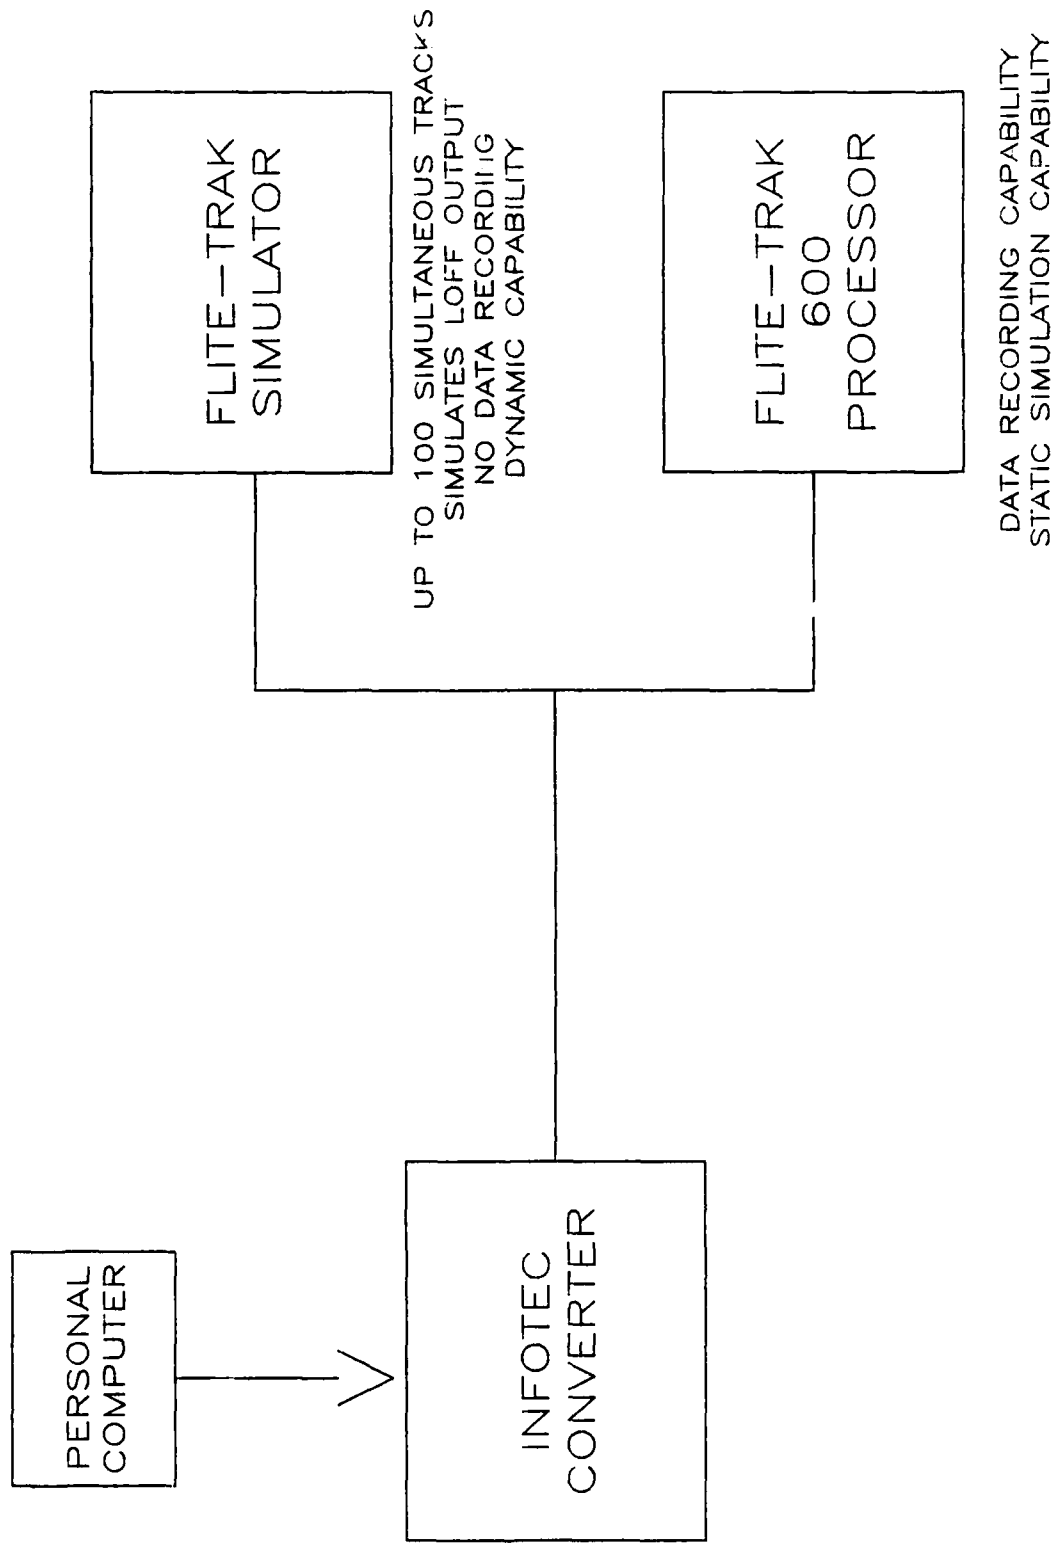


FIGURE 3. TEST CONFIGURATION FOR SIMULATION

## FLIGHT TEST.

Flight tests were conducted over the Gulf of Mexico using a Convair 580 aircraft equipped with several navigational receivers, a LOFF interface, and data collection equipment. The aircraft was flown in the area approved for LOFF operations in a normal LOFF operational environment. The flight test routes are shown in figures 4 through 9.

The flight pattern selected to determine VHF data link coverage was to fly from one of the LOFF receiver sites directly to another. The procedure was simply to mark the points at which data were received at the ARTCC, based upon a controller's observation of the target on his Plan View Display (PVD). Flights were conducted at several altitudes to determine coverage at each. Because VHF radio is a line-of-site system, the available range depends primarily on altitude rather than signal output power, especially at the lower altitudes used in the offshore environment. Each VHF facility was overflown at each altitude in order to determine its performance. Flight profiles were constructed in a manner which covered the entire sector and also verified omnidirectional coverage of each facility. Orbits around stations were flown as required.

Several flights were conducted in areas of LOFF and radar coverage overlap. Probes were flown to radar sites at Alexandria and New Orleans, Louisiana, to determine whether their coverage extended into the LOFF sector. No significant overlap (greater than 2 miles) was detected. Where overlaps did exist partial orbits and radial routes were flown from each of the radar transmitters to determine relative performance between LOFF and radar.

A single high altitude probe was flown at flight level 200 to determine high altitude coverage of the system. The route selected was directly south of the QHI site. This is a route which would be used by internationally arriving flights which are currently handled manually due to the lack of radar coverage in the area.

Loran accuracy data were collected during the entire flight test. Loran accuracy was measured using the highly accurate Global Positioning System (GPS) as a position reference. Data were collected once per second from both types of Loran receivers, and at a nominal 1.2 second rate for GPS. Comparison of Loran to GPS provides an accuracy measure on the order of 30 meters in the horizontal plane.

## DATA REDUCTION AND ANALYSIS

Data reduction was performed on a VAX 11/750 computer. All recorded data were transferred to the VAX, including tape recordings generated by EDARC and the airborne data collection equipment. Data processing is described below.

### INFOTEC CONVERTER ACCURACY.

The Infotec converter has the capability to record a log data message which contains all the input and output information used in the conversion process. The input LOFF message is recorded, along with the results of the conversion in range and azimuth, and time of message input and message output. The log files

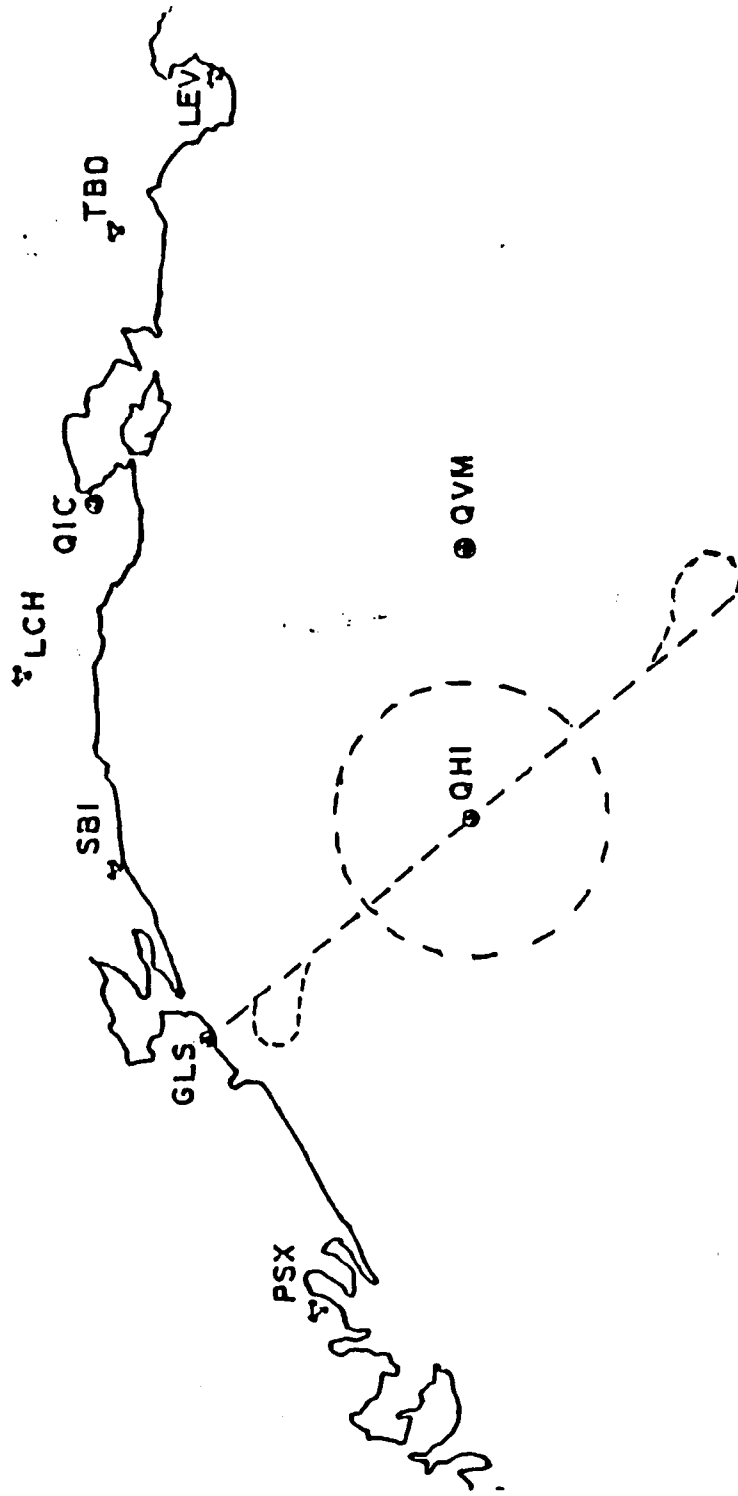


FIGURE 4. FLIGHT TEST ROUTE - QHI ORBIT AND VHF COVERAGE

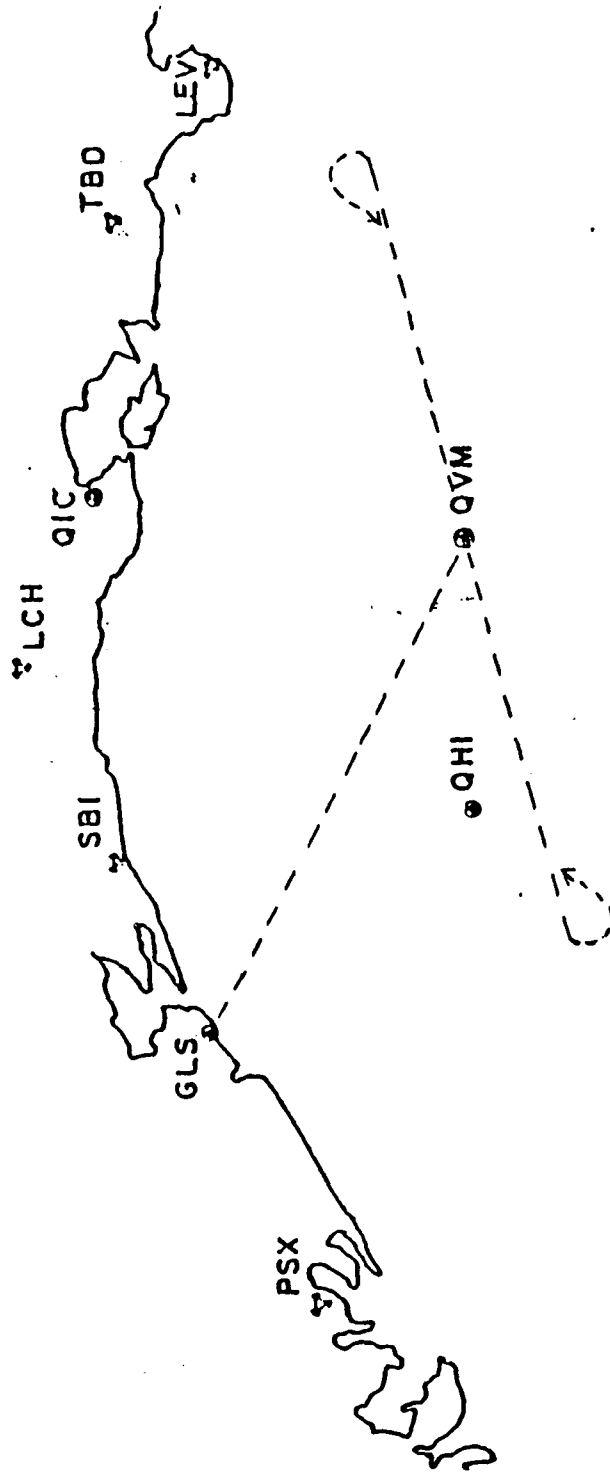


FIGURE 5. FLIGHT TEST ROUTE - QVM VHF COVERAGE

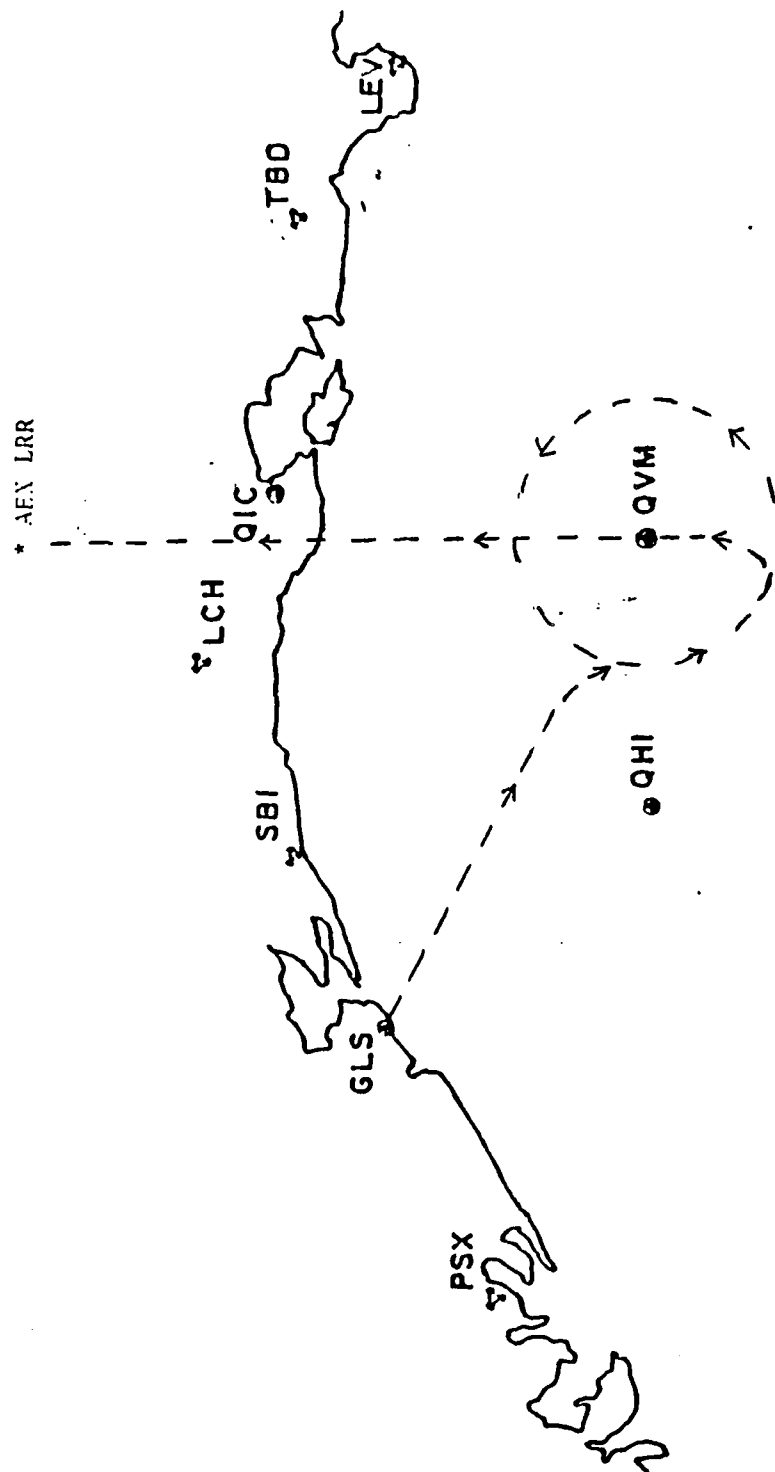


FIGURE 6. FLIGHT TEST ROUTE - QVM ORBIT AND AEX OVERLAP PROBE

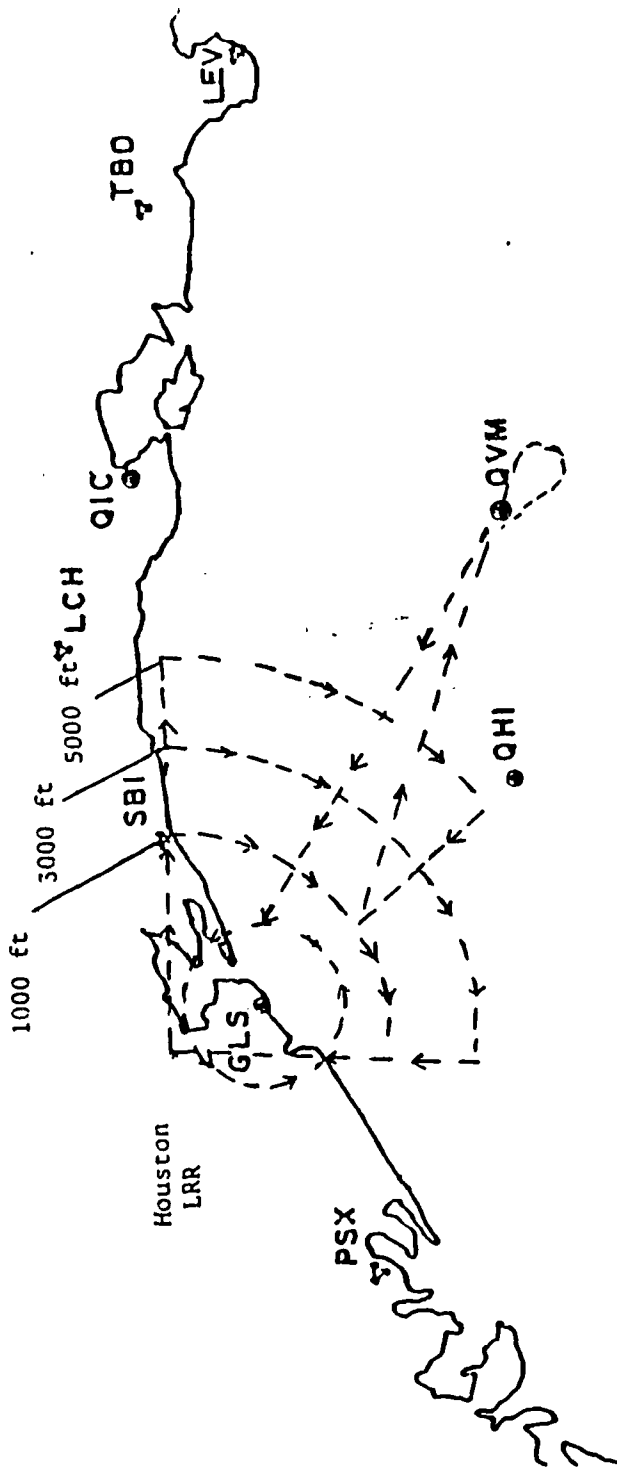


FIGURE 7. FLIGHT TEST ROUTE - GLS ORBIT AND RADAR OVERLAP AREA

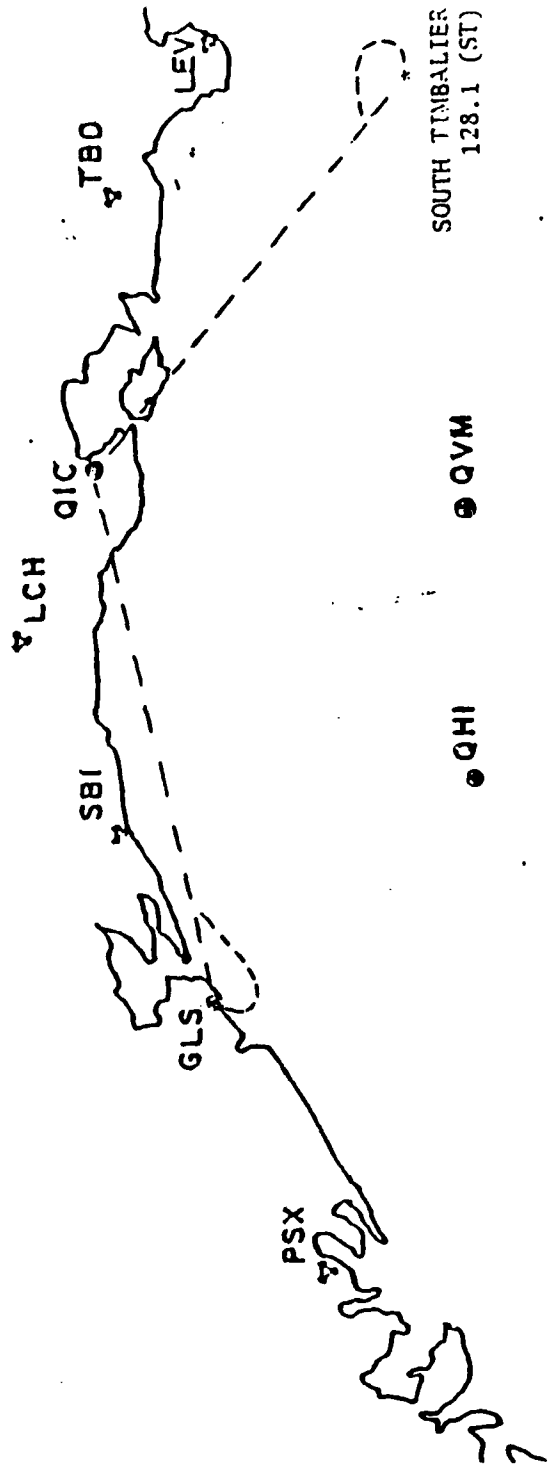


FIGURE 8. FLIGHT TEST ROUTE - QIC VHF COVERAGE

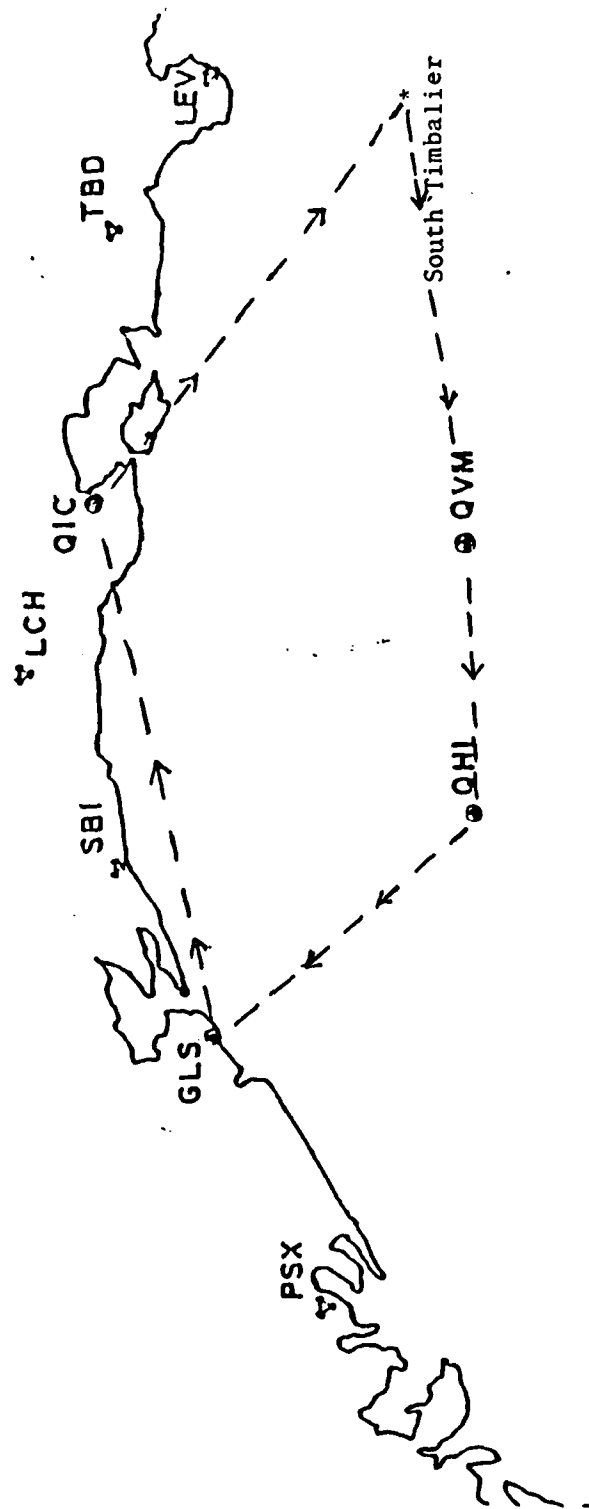


FIGURE 9. FLIGHT TEST ROUTE - ENTIRE LOFF SECTOR

were used to determine accuracy of the algorithm implementation. No attempt was made to verify the algorithm itself as this had been accomplished previously.

The conversion algorithm as described in the Converter Unit Technical Description was implemented on the VAX, and LOFF messages from the log files were processed through it. These results were compared to the actual output message as recorded in the log file. A mean and standard deviation were computed for comparison to the radar accuracy standard of 1/8 nmi in range and 2 azimuth change pulses (ACP's). An ACP is equal to  $0.088^\circ$ .

#### EDARC CONVERSION ACCURACY.

EDARC records data as they are posted to the controller's display. The data fields of interest are time, beacon code, and system x-y coordinates of the tracked target. Static targets were used to eliminate the effects of the tracking function. Samples were placed in bins according to beacon codes which correspond to particular lat/long positions. These bins were used to determine the mean and standard deviations of system x-y outputs for given lat/long inputs. Analysis of the data, however, showed that they were highly repeatable, indicating that the mean plus standard deviation analysis did not provide a clear indication of system performance.

The method employed to identify the system coordinates corresponding to input lat long was to determine the system output which occurred with most frequency for a given input. Statistically, this is known as the mode of a variable. It has more meaning, in this case, than the statistically expected value (mean) because of the discrete nature of the conversion output. System coordinates are not continuous but have discrete values at 1/16 nmi resolution. The statistical mode of the output was determined for each lat/long input.

It should be pointed out that the accuracy of a given coordinate conversion can only be determined with respect to a given transformation. That is, the conversion process maps points from one coordinate system into corresponding points in another system. Since system x-y coordinates have no physical basis, it is difficult to place an accuracy figure on the conversion process. What has been done here is to show the relationship between the coordinate systems (lat/long and system x-y), and to show how a given distance in one system is transformed into a distance in the other.

#### EDARC DYNAMIC ACCURACY.

EDARC dynamic accuracy was measured by comparing results from static simulation to results from the flight test. The array of system x-y coordinates corresponding to lat/long inputs were used to estimate static conversion coordinates for each reported aircraft position.

The first step was to merge airborne data and EDARC data together. This was done by matching the time of each EDARC record to the closest airborne time, which was within 1 second. The Loran position, as recorded in the airplane, was used as an index to the tables of static simulation data described above. This provides a measure of the actual aircraft position compared to the position displayed to the controller. It is a true end-to-end check of system performance.

The coordinates were estimated by interpolating between the four closest points in both x and y. For each coordinate the actual values were estimated independently. To estimate the system y coordinate, for example, the two columns were interpolated over y (which corresponds to lat) to produce an intermediate value for each. These values were then interpolated over x to produce the final value. The final interpolated position was compared to the position of the aircraft as determined by the EDARC tracker. The results indicate the influence of aircraft dynamics, primarily as a result of tracker effects.

#### COMPARATIVE PERFORMANCE IN OVERLAP AREAS.

Comparison of radar and LOFF targets was accomplished in the areas of common coverage of the two. Tracked position, as determined by EDARC, of both types of targets were compared on a point-by-point basis for all available data points. Results were expressed as a mean and standard deviation.

The results of this analysis contain some effects of the tracker function, and represent the actual differences in performance of the two systems as displayed to the controller.

#### LORAN ACCURACY.

Loran accuracies were determined with respect to a GPS position reference. For each point, the error term is the difference between Loran and GPS reported position. A position solution was obtained at 1-second rates from both Loran and GPS. For GPS, this required interpolation over the 1.2 second GPS update interval to estimate GPS position at the time of each Loran sample. Differences were summed for each flight to allow a mean and standard deviation to be computed.

#### VHF DATA LINK COVERAGE.

Coverage of the data link was determined by observing the loss or start of message reception as the aircraft flew into and out of coverage. The point at which this occurred was determined by controller observation of the point at which the first missed transmission occurred on an outbound leg, or the point at which the controller would determine radar contact (in a radar environment) on an inbound leg. This is a subjective measure but is estimated to be within 1 mile of the actual coverage due to the fact that the controller was handling a single aircraft and could provide special handling, particularly with respect to determination of the limits of LOFF coverage. During flight testing a failure of the EDARC data recording system occurred. The failure could not be recovered during the flight test but did not affect EDARC conversion, tracking, or display processes. Because of this failure, only the subjective appraisal by the controller was available to determine data link coverage.

#### TIME DELAYS.

Delays in the converter were determined from the log files. The converter time stamps input data and output data, posting both times to the log file. The differences were computed for each sample and reduced to a mean and standard deviation for all samples.

## RESULTS

### INFOTEC CONVERTER ACCURACY.

Results of the analysis of the Infotec converter performance during simulation, as compared to the specified algorithms, are presented in table 2. The sector was divided into smaller areas for testing purposes. The mean and standard deviation are presented for these various areas throughout the LOFF sector (and for the entire sector) at three altitudes.

Overall accuracy of the conversion as compared to the algorithm varies with altitude. At 1000 feet, where most of the data were collected, the accuracy is 0.29 nmi in range and 0.46 ACP's in azimuth throughout the entire sector. This does not meet the radar accuracy specification of 1/8 (0.125) nmi in range, but does meet the requirement of 2 ACP's (0.176°) in azimuth.

Differences between ranges and azimuths as computed by the VAX and the Infotec converter show a spatial variation as observed in the table. It can be seen that data computed for points further from the pseudo radar site tend to agree less than those closer to the site, with the exception of points within 30 miles of the site. The result is that conversion accuracy has the unintended characteristic of being dependent upon range from the site, just as an actual radar does.

The reason for the discrepancy has not yet been determined. As mentioned previously, every attempt was made in processing the data to adhere to the algorithm as published in the converter specification. Double precision arithmetic was used initially, but after the discrepancies were noticed the algorithm was recoded using single precision arithmetic with no difference in results.

### EDARC CONVERSION ACCURACY.

The areas covered by simulated test points are shown for three altitudes in figures 10 through 12. The plots show the data points as recorded by the EDARC system when simulated targets were input at regular 6-minute spacings. Results showing the correspondence of lat/long inputs to EDARC-determined system x-y are presented in tables 3 through 5. Each table shows the system x-y outputs for a grid of lat/long, spaced at a 6-minute interval, for an area of the LOFF sector at a particular altitude. System x-y coordinates correspond to nautical miles in the table. The actual distance on the surface of the Earth for a 6-minute increment in lat is 6 nmi. For long, the actual distance follows the relation:

$$\text{Distance (nmi)} = \text{Distance (degrees)} \times \cos(\text{lat}) \times 60.$$

For a 6-minute increment in long in this area the actual distance is approximately 5.3 nmi.

Data were placed into groups, called data bins, at three altitudes: 100, 1000, and 4900 feet. Aggregate results are shown in table 6. The mean values represent the spacing in system coordinates for a 6-minute spacing each in lat and long. The first two columns show variation in system x and y with lat held constant. These numbers reflect changes in x and y moving horizontally through the data of tables 3 through 5. In a similar manner the last two columns (constant long) reflect changes moving vertically through the tables.

TABLE 2. INFOTEC CONVERTER ACCURACY

| Area<br>Longitude<br>Deg Min - Deg Min | Range (nmi) |         | Azimuth (ACP's) |         | Samples |
|--|-------------|---------|-----------------|---------|---------|
|  | Mean        | Std Dev | Mean            | Std Dev |         |
| Altitude = 100 feet, 2 minute spacing  |             |         |                 |         |         |
| 96° 0' - 95° 0'                        | 0.35        | 0.09    | 0.80            | 0.61    | 2670    |
| 95° 0' - 94° 0'                        | 0.37        | 0.09    | 0.97            | 0.90    | 2701    |
| 94° 0' - 93° 0'                        | 0.36        | 0.11    | 1.28            | 2.08    | 2670    |
| 93° 0' - 92° 0'                        | 0.20        | 0.26    | -0.82           | 15.01   | 2671    |
| 92° 0' - 91° 0'                        | -0.06       | 0.23    | -3.21           | 1.98    | 2670    |
| 91° 0' - 90° 0'                        | -0.16       | 0.16    | -2.04           | 0.62    | 2670    |
| Entire Sector                          | 0.18        | 0.27    | -0.50           | 6.47    | 16052   |

Altitude = 1000 feet, 0.5 minute spacing

|                 |       |      |       |       |        |
|-----------------|-------|------|-------|-------|--------|
| 95°30' - 95°15' | 0.35  | 0.11 | 0.68  | 0.77  | 11947  |
| 95°15' - 95° 0' | 0.37  | 0.19 | 0.87  | 1.07  | 10742  |
| 95° 0' - 94°45' | 0.37  | 0.09 | 0.92  | 0.76  | 10741  |
| 94°45' - 94°30' | 0.37  | 0.09 | 0.97  | 0.83  | 10719  |
| 94°30' - 94°15' | 0.37  | 0.10 | 0.99  | 0.99  | 10893  |
| 94°15' - 94° 0' | 0.37  | 0.14 | 1.07  | 1.18  | 10740  |
| 94° 0' - 93°45' | 0.39  | 0.16 | 0.92  | 1.35  | 9554   |
| 93°45' - 93°30' | 0.36  | 0.17 | 1.19  | 1.99  | 10723  |
| 93°30' - 93°15' | 0.35  | 0.12 | 1.71  | 2.14  | 8970   |
| 93°15' - 93° 0' | 0.33  | 0.14 | 1.93  | 2.89  | 8977   |
| 93° 0' - 92°45' | 0.31  | 0.17 | 2.17  | 4.20  | 9048   |
| 92°45' - 92°30' | 0.26  | 0.22 | 2.55  | 7.24  | 8970   |
| 92°30' - 92°15' | 0.13  | 0.28 | -0.87 | 25.48 | 8932   |
| 92°15' - 92° 0' | 0.00  | 0.29 | -4.85 | 6.31  | 8970   |
| 92° 0' - 91°45' | -0.06 | 0.26 | -4.19 | 3.01  | 8970   |
| 91°45' - 91°30' | -0.04 | 0.19 | -2.97 | 2.13  | 8970   |
| 91°30' - 91°15' | -0.13 | 0.20 | -3.17 | 1.22  | 8970   |
| 91°15' - 91° 0' | -0.16 | 0.18 | -2.76 | 0.90  | 8973   |
| Entire Sector   | 0.29  | 0.22 | 0.46  | 7.18  | 148896 |

Altitude = 4900 feet, 2 minute spacing

|                 |       |      |       |       |       |
|-----------------|-------|------|-------|-------|-------|
| 96° 0' - 95° 0' | 0.35  | 0.10 | 0.79  | 0.61  | 2680  |
| 95° 0' - 94° 0' | 0.37  | 0.08 | 0.99  | 0.91  | 2670  |
| 94° 0' - 93° 0' | 0.36  | 0.11 | 1.26  | 2.06  | 2670  |
| 93° 0' - 92° 0' | 0.20  | 0.25 | -0.61 | 14.74 | 2670  |
| 92° 0' - 91° 0' | -0.06 | 0.23 | -3.23 | 1.98  | 2670  |
| 91° 0' - 90° 0' | -0.16 | 0.16 | -2.03 | 0.62  | 2670  |
| Entire Sector   | 0.18  | 0.27 | -0.47 | 6.37  | 16030 |

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT, N J 08405

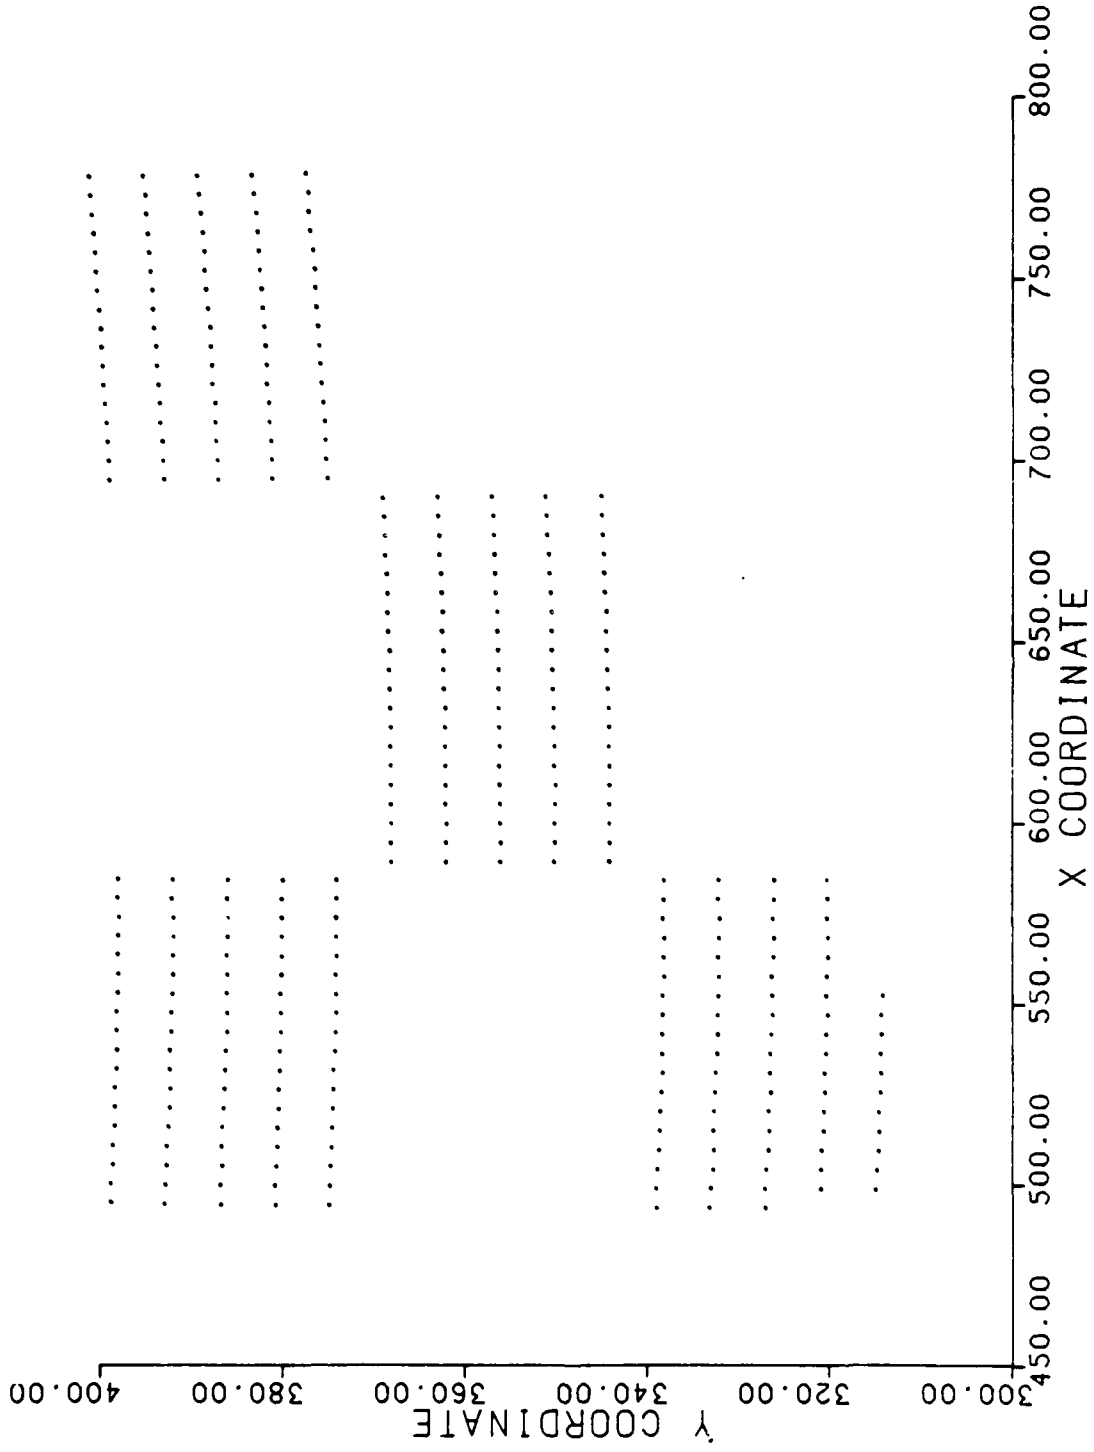


FIGURE 10. EDARC SIMULATION AREA - 100 FEET ALTITUDE

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. N J 08403

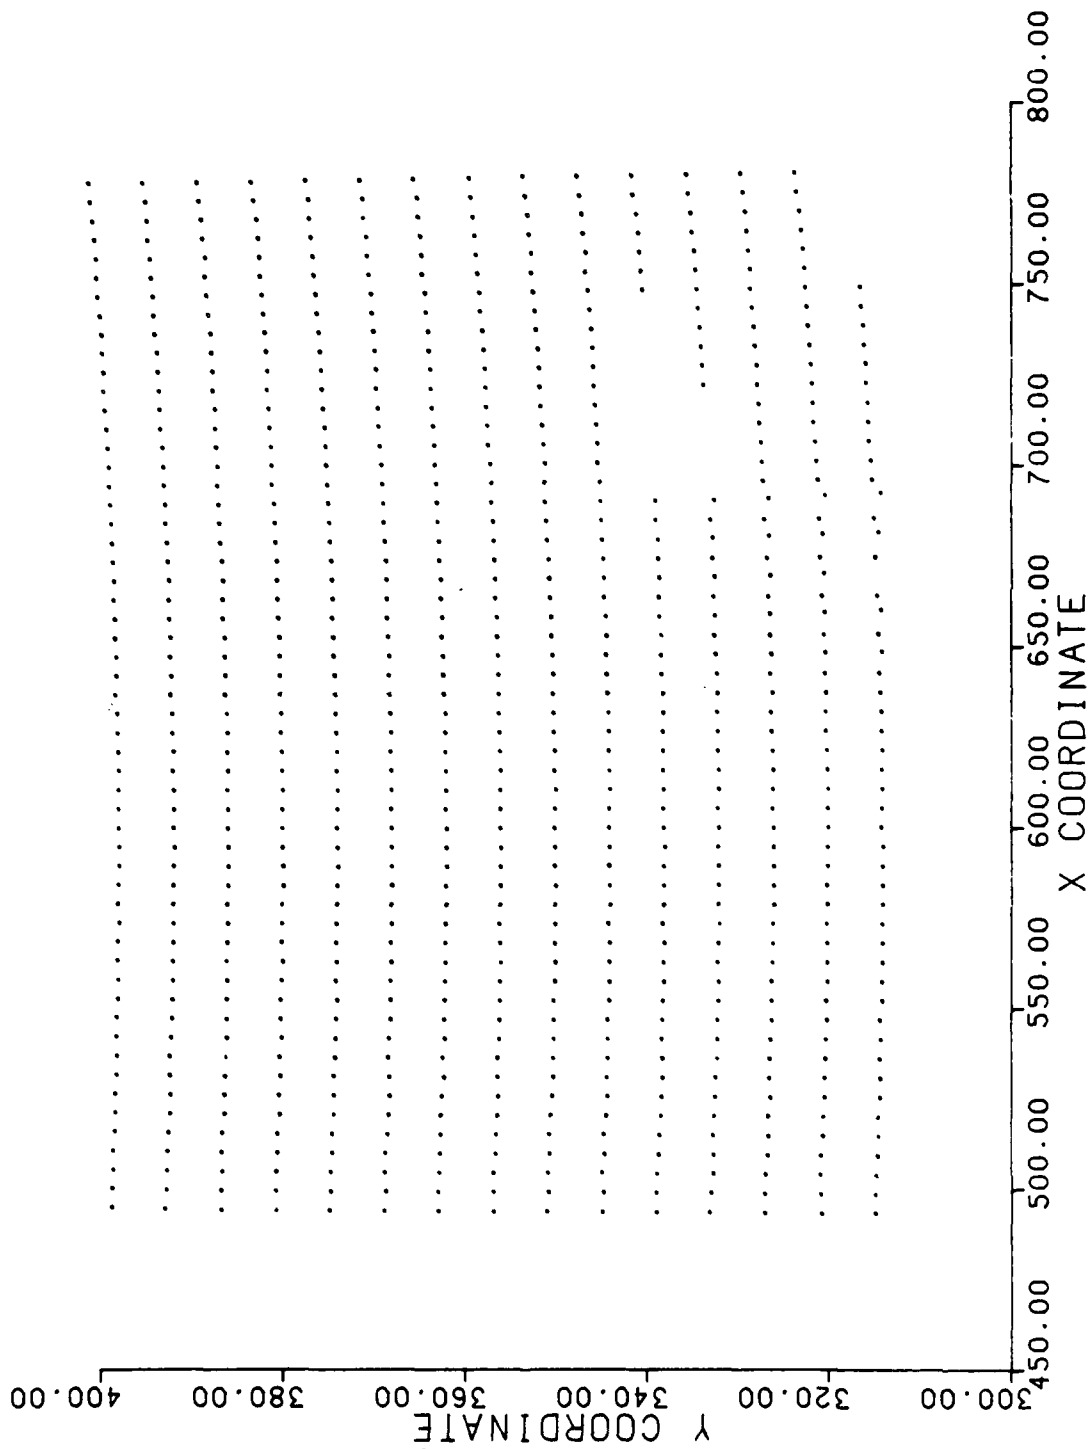


FIGURE 11. EDARC SIMULATION AREA - 1000 FEET ALTITUDE

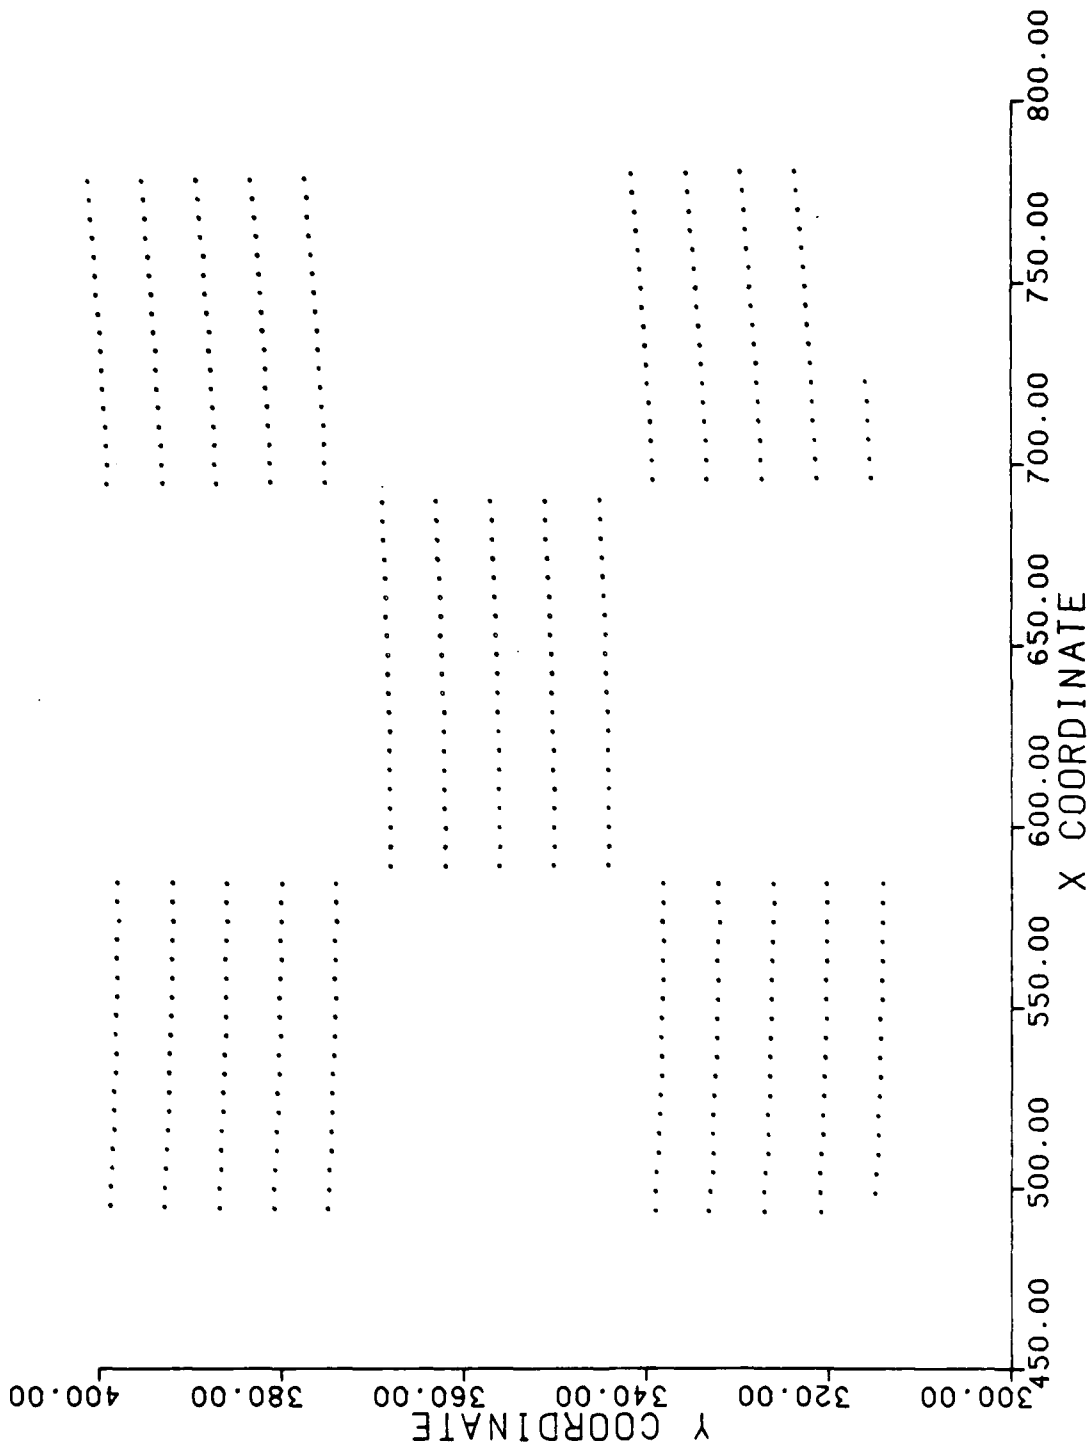


FIGURE 12. EDARC SIMULATION AREA - 4900 FEET ALTITUDE

TABLE 3. EDARC X-Y POSITION IN MILES  
AT 100 FEET ALTITUDE

| Lat<br>Deg Min | Long →            |                |                    |                    |                    |                    |                    |                    |                    |                    |  |
|----------------|-------------------|----------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--|
|                | Deg Min<br>96 00' | 95 54'         | 95 48'             | 95 42'             | 95 36'             | 95 30'             | 95 24'             | 95 18'             | 95 12'             | 95 6'              |  |
| 29 0'          | 0.000<br>0.000    | 0.000<br>0.000 | 398.375<br>493.563 | 398.313<br>498.813 | 398.125<br>503.938 | 398.125<br>509.188 | 397.938<br>514.563 | 397.938<br>519.813 | 397.938<br>525.063 | 397.750<br>530.250 |  |
| 28 54'         | 0.000<br>0.000    | 0.000<br>0.000 | 392.438<br>493.563 | 392.375<br>498.688 | 392.250<br>503.938 | 392.188<br>509.313 | 392.063<br>514.500 | 391.938<br>519.750 | 391.875<br>524.938 | 391.938<br>530.313 |  |
| 28 48'         | 0.000<br>0.000    | 0.000<br>0.000 | 386.375<br>493.188 | 386.375<br>498.563 | 386.188<br>503.813 | 386.250<br>509.125 | 386.188<br>514.438 | 385.938<br>519.688 | 385.938<br>524.938 | 385.875<br>530.063 |  |
| 28 42'         | 0.000<br>0.000    | 0.000<br>0.000 | 380.375<br>493.125 | 380.375<br>498.438 | 380.250<br>503.688 | 380.125<br>508.938 | 380.125<br>514.188 | 379.875<br>519.500 | 380.000<br>524.813 | 379.813<br>530.063 |  |
| 28 36'         | 0.000<br>0.000    | 0.000<br>0.000 | 374.500<br>493.063 | 374.375<br>498.250 | 374.313<br>503.625 | 374.125<br>508.875 | 374.125<br>514.188 | 374.000<br>519.500 | 374.000<br>524.813 | 374.000<br>530.125 |  |
| 28 30'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 28 24'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 28 18'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 28 12'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 28 6'          | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 28 0'          | 0.000<br>0.000    | 0.000<br>0.000 | 338.563<br>492.375 | 338.563<br>497.688 | 338.438<br>502.938 | 338.250<br>508.250 | 338.188<br>513.625 | 338.063<br>519.000 | 338.000<br>524.250 | 337.875<br>529.563 |  |
| 27 54'         | 0.000<br>0.000    | 0.000<br>0.000 | 332.750<br>492.313 | 332.563<br>497.625 | 332.250<br>502.938 | 332.250<br>508.188 | 332.313<br>513.563 | 332.250<br>518.875 | 332.125<br>524.188 | 332.063<br>529.563 |  |
| 27 48'         | 0.000<br>0.000    | 0.000<br>0.000 | 326.625<br>492.188 | 326.625<br>497.500 | 326.500<br>502.813 | 326.250<br>508.063 | 326.188<br>513.438 | 326.250<br>518.875 | 326.000<br>524.063 | 326.063<br>529.563 |  |
| 27 42'         | 0.000<br>0.000    | 0.000<br>0.000 | 320.438<br>492.063 | 320.500<br>497.375 | 320.500<br>502.750 | 320.438<br>508.063 | 320.188<br>513.438 | 320.188<br>518.750 | 320.063<br>524.063 | 320.063<br>529.438 |  |
| 27 36'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 314.500<br>497.313 | 314.375<br>502.625 | 314.188<br>507.938 | 314.125<br>513.313 | 314.188<br>518.625 | 314.000<br>524.000 | 313.938<br>529.313 |  |
| 27 30'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 27 24'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 27 18'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 27 12'         | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |
| 27 6'          | 0.000<br>0.000    | 0.000<br>0.000 | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |  |

Entry format: X.XXX - system y coordinate  
X.XXX - system x coordinate

TABLE 3. EDARC X-Y POSITION IN MILES  
AT 100 FEET ALTITUDE (CONTINUED)

|        | 95 0'              | 94 54'             | 94 48'             | 94 42'             | 94 36'             | 94 30'             | 94 24'             | 94 18'             | 94 12'             | 94 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 00' | 397.688<br>535.500 | 397.750<br>540.875 | 397.688<br>546.188 | 397.625<br>551.313 | 397.563<br>556.563 | 397.625<br>561.938 | 397.563<br>567.188 | 397.375<br>572.250 | 397.563<br>577.625 | 397.500<br>582.813 |
| 28 54' | 391.875<br>535.688 | 391.750<br>540.750 | 391.625<br>546.063 | 391.625<br>551.188 | 391.563<br>556.500 | 391.563<br>561.750 | 391.500<br>567.000 | 391.438<br>572.250 | 391.500<br>577.625 | 391.438<br>582.875 |
| 28 48' | 385.813<br>535.375 | 385.625<br>540.625 | 385.625<br>545.875 | 385.688<br>551.313 | 385.625<br>556.500 | 385.688<br>561.875 | 385.563<br>567.000 | 385.500<br>572.313 | 385.563<br>577.563 | 385.500<br>582.750 |
| 28 42' | 379.875<br>535.313 | 379.625<br>540.625 | 379.750<br>545.875 | 379.813<br>551.188 | 379.688<br>556.563 | 379.500<br>561.688 | 379.625<br>567.063 | 379.563<br>572.250 | 379.563<br>577.500 | 379.438<br>582.688 |
| 28 36' | 373.813<br>535.188 | 373.750<br>540.438 | 373.688<br>545.875 | 373.625<br>551.063 | 373.750<br>556.438 | 373.625<br>561.625 | 373.688<br>566.938 | 373.500<br>572.313 | 373.563<br>577.563 | 373.563<br>582.750 |
| 28 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 0'  | 337.875<br>534.938 | 337.938<br>540.250 | 337.875<br>545.563 | 337.813<br>550.938 | 337.688<br>556.125 | 337.750<br>561.438 | 337.625<br>566.813 | 337.813<br>572.125 | 337.688<br>577.313 | 337.688<br>582.688 |
| 27 54' | 331.875<br>534.813 | 331.813<br>540.125 | 331.813<br>545.438 | 331.750<br>550.688 | 331.688<br>556.000 | 331.813<br>561.438 | 331.688<br>566.688 | 331.563<br>572.063 | 331.750<br>577.500 | 331.688<br>582.750 |
| 27 48' | 326.000<br>534.875 | 325.938<br>540.063 | 325.813<br>545.438 | 325.875<br>550.813 | 325.875<br>556.188 | 325.750<br>561.438 | 325.688<br>566.625 | 325.688<br>572.125 | 325.563<br>577.375 | 325.625<br>582.688 |
| 27 42' | 319.938<br>534.688 | 319.875<br>540.063 | 319.750<br>545.375 | 319.875<br>550.750 | 319.875<br>556.063 | 319.750<br>561.313 | 319.750<br>566.688 | 319.813<br>572.063 | 319.750<br>577.438 | 319.813<br>582.688 |
| 27 36' | 314.000<br>534.625 | 313.875<br>540.000 | 313.938<br>545.375 | 313.750<br>550.688 | 313.750<br>556.000 | 313.688<br>561.313 | 313.688<br>566.688 | 313.688<br>571.938 | 313.688<br>577.375 | 313.625<br>582.750 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 3. EDARC X-Y POSITION IN MILES  
AT 100 FEET ALTITUDE (CONTINUED)

|        | 94 0'              | 93 54'             | 93 48'             | 93 42'             | 93 36'             | 93 30'             | 93 24'             | 93 18'             | 93 12'             | 93 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 30' | 367.563<br>588.000 | 367.563<br>593.375 | 367.563<br>598.625 | 367.625<br>603.875 | 367.625<br>609.188 | 367.625<br>614.500 | 367.688<br>619.750 | 367.625<br>625.000 | 367.688<br>630.250 | 367.750<br>635.500 |
| 28 24' | 361.500<br>588.063 | 361.563<br>593.250 | 361.500<br>598.438 | 361.625<br>603.875 | 361.625<br>609.063 | 361.625<br>614.375 | 361.688<br>619.688 | 361.688<br>625.000 | 361.625<br>630.250 | 361.813<br>635.625 |
| 28 18' | 355.625<br>588.000 | 355.563<br>593.188 | 355.625<br>598.625 | 355.625<br>603.938 | 355.688<br>609.188 | 355.625<br>614.500 | 355.688<br>619.813 | 355.750<br>625.063 | 355.813<br>630.250 | 355.813<br>635.625 |
| 28 12' | 349.688<br>588.125 | 349.625<br>593.313 | 349.688<br>598.563 | 349.625<br>603.938 | 349.563<br>609.188 | 349.750<br>614.438 | 349.688<br>619.813 | 349.813<br>625.063 | 349.813<br>630.313 | 349.875<br>635.625 |
| 28 6'  | 343.688<br>588.125 | 343.625<br>593.250 | 343.688<br>598.625 | 343.688<br>603.875 | 343.625<br>609.250 | 343.688<br>614.375 | 343.750<br>619.813 | 343.750<br>625.188 | 343.750<br>630.375 | 343.875<br>635.750 |
| 28 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 3. EDARC X-Y POSITION IN MILES  
AT 100 FEET ALTITUDE (CONTINUED)

|        | 93 0'              | 92 54'             | 92 48'             | 92 42'             | 92 36'             | 92 30'             | 92 24'             | 92 18'             | 92 12'             | 92 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 30' | 367.813<br>640.750 | 367.750<br>646.063 | 367.875<br>651.438 | 368.000<br>656.563 | 368.000<br>661.875 | 368.063<br>667.188 | 368.125<br>672.313 | 368.250<br>677.688 | 368.375<br>682.938 | 368.375<br>688.125 |
| 28 24' | 361.875<br>640.875 | 361.875<br>646.063 | 362.000<br>651.438 | 361.938<br>656.750 | 362.063<br>662.000 | 362.125<br>667.250 | 362.313<br>672.500 | 362.313<br>677.688 | 362.438<br>683.063 | 362.500<br>688.375 |
| 28 18' | 355.813<br>640.938 | 355.875<br>646.250 | 355.938<br>651.500 | 355.938<br>656.813 | 356.125<br>662.063 | 356.188<br>667.313 | 356.250<br>672.563 | 356.313<br>677.875 | 356.375<br>683.188 | 356.563<br>688.500 |
| 28 12' | 349.813<br>641.000 | 349.875<br>646.313 | 350.000<br>651.563 | 350.000<br>656.813 | 350.125<br>662.125 | 350.250<br>667.438 | 350.313<br>672.688 | 350.500<br>677.938 | 350.563<br>683.250 | 350.563<br>688.500 |
| 28 6'  | 343.938<br>640.938 | 344.000<br>646.313 | 343.938<br>651.563 | 344.000<br>656.938 | 344.188<br>662.250 | 344.250<br>667.500 | 344.313<br>672.750 | 344.438<br>678.000 | 344.500<br>683.375 | 344.563<br>688.625 |
| 28 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 3. EDARC X-Y POSITION IN MILES  
AT 100 FEET ALTITUDE (CONTINUED)

|        | 92 0'              | 91 54'             | 91 48'             | 91 42'             | 91 36'             | 91 30'             | 91 24'             | 91 18'             | 91 12'             | 91 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 398.500<br>692.813 | 398.438<br>698.125 | 398.563<br>703.375 | 398.688<br>708.625 | 398.875<br>713.875 | 399.000<br>719.125 | 399.063<br>724.313 | 399.188<br>729.563 | 399.250<br>734.750 | 399.438<br>739.875 |
| 28 54' | 392.375<br>693.063 | 392.500<br>698.188 | 392.563<br>703.563 | 392.813<br>708.688 | 392.875<br>714.125 | 393.063<br>719.188 | 393.125<br>724.438 | 393.188<br>729.813 | 393.438<br>734.938 | 393.563<br>740.125 |
| 28 48' | 386.500<br>693.000 | 386.688<br>698.375 | 386.688<br>703.688 | 386.813<br>708.813 | 386.938<br>714.188 | 387.063<br>719.375 | 387.125<br>724.625 | 387.375<br>729.875 | 387.313<br>735.125 | 387.563<br>740.313 |
| 28 42' | 380.563<br>693.313 | 380.625<br>698.563 | 380.688<br>703.688 | 380.875<br>709.000 | 380.938<br>714.313 | 381.125<br>719.500 | 381.125<br>724.750 | 381.250<br>730.063 | 381.500<br>735.375 | 381.563<br>740.500 |
| 28 36' | 374.625<br>693.313 | 374.688<br>698.688 | 374.750<br>703.875 | 374.813<br>709.125 | 375.000<br>714.313 | 375.125<br>719.688 | 375.250<br>725.000 | 375.438<br>730.125 | 375.500<br>735.375 | 375.688<br>740.688 |
| 28 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 0'  | 338.750<br>694.063 | 338.813<br>699.375 | 339.000<br>704.750 | 339.063<br>710.063 | 339.188<br>715.250 | 339.375<br>720.625 | 339.500<br>725.750 | 339.625<br>731.125 | 339.750<br>736.375 | 339.938<br>741.750 |
| 27 54' | 332.875<br>694.188 | 332.875<br>699.438 | 333.000<br>704.875 | 333.125<br>710.125 | 333.250<br>715.438 | 333.313<br>720.688 | 333.500<br>726.063 | 333.625<br>731.250 | 333.750<br>736.625 | 333.938<br>741.938 |
| 27 48' | 326.813<br>694.313 | 326.938<br>699.563 | 327.000<br>704.938 | 327.188<br>710.250 | 327.250<br>715.563 | 327.375<br>720.813 | 327.500<br>726.188 | 327.688<br>731.500 | 327.813<br>736.813 | 328.000<br>742.125 |
| 27 42' | 320.813<br>694.500 | 320.938<br>699.750 | 321.063<br>705.000 | 321.250<br>710.438 | 321.313<br>715.688 | 321.375<br>721.000 | 321.563<br>726.313 | 321.688<br>731.625 | 321.875<br>737.000 | 322.000<br>742.313 |
| 27 36' | 314.875<br>694.563 | 315.000<br>699.875 | 315.188<br>705.250 | 315.250<br>710.500 | 315.313<br>715.813 | 315.500<br>721.250 | 315.563<br>726.563 | 315.750<br>731.750 | 315.813<br>737.125 | 316.063<br>742.438 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 3. EDARC X-Y POSITION IN MILES  
AT 100 FEET ALTITUDE (CONTINUED)

|        | 91 0'              | 90 54'             | 90 48'             | 90 42'             | 90 36'             | 90 30'             | 90 24'             | 90 18'         | 90 12'         | 90 6'          |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------|----------------|----------------|
| 29 0'  | 399.688<br>745.250 | 399.813<br>750.438 | 399.875<br>755.688 | 400.063<br>761.000 | 400.250<br>766.125 | 400.438<br>771.438 | 400.563<br>776.688 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 54' | 393.625<br>745.438 | 393.875<br>750.625 | 394.000<br>755.813 | 394.250<br>761.000 | 394.313<br>766.375 | 394.500<br>771.688 | 394.688<br>776.813 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 48' | 387.750<br>745.625 | 387.938<br>750.813 | 387.938<br>756.125 | 388.250<br>761.375 | 388.375<br>766.625 | 388.563<br>771.813 | 388.750<br>776.938 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 42' | 381.688<br>745.813 | 381.875<br>751.000 | 382.000<br>756.313 | 382.125<br>761.563 | 382.313<br>766.750 | 382.563<br>772.000 | 382.813<br>777.125 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 36' | 375.813<br>746.000 | 376.000<br>751.250 | 376.188<br>756.438 | 376.375<br>761.688 | 376.563<br>766.938 | 376.625<br>772.313 | 376.875<br>777.438 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 0'  | 340.000<br>747.063 | 340.188<br>752.313 | 340.375<br>757.563 | 340.563<br>762.938 | 340.688<br>768.125 | 341.000<br>773.500 | 341.125<br>778.750 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 54' | 334.063<br>747.188 | 334.250<br>752.500 | 334.375<br>757.813 | 334.625<br>763.063 | 334.750<br>768.375 | 334.938<br>773.750 | 335.125<br>779.000 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 48' | 328.188<br>747.375 | 328.250<br>752.750 | 328.500<br>758.000 | 328.625<br>763.313 | 328.750<br>768.688 | 328.938<br>774.000 | 329.188<br>779.250 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 42' | 322.125<br>747.625 | 322.313<br>752.938 | 322.438<br>758.313 | 322.625<br>763.500 | 322.813<br>768.813 | 323.063<br>774.125 | 323.250<br>779.375 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 36' | 316.125<br>747.813 | 316.375<br>753.125 | 316.500<br>758.438 | 316.750<br>763.688 | 317.000<br>769.063 | 317.063<br>774.313 | 317.313<br>779.563 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |

TABLE 4. EDARC X-Y POSITION IN MILES  
AT 1000 FEET ALTITUDE

| Lat<br>Deg Min | Lon --> |       | 95 54'  | 95 48'  | 95 42'  | 95 36'  | 95 30'  | 95 24'  | 95 18'  | 95 12'  | 95 6'   |
|----------------|---------|-------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|                | Deg     | Min   |         |         |         |         |         |         |         |         |         |
| 29 0'          | 0.000   | 0.000 | 398.375 | 398.313 | 398.125 | 398.125 | 397.938 | 397.938 | 397.938 | 397.750 | 397.750 |
|                | 0.000   | 0.000 | 493.563 | 498.813 | 503.938 | 509.188 | 514.563 | 519.813 | 525.063 | 530.250 | 530.250 |
| 28 54'         | 0.000   | 0.000 | 392.563 | 392.375 | 392.250 | 392.188 | 392.063 | 391.938 | 391.875 | 391.938 | 391.938 |
|                | 0.000   | 0.000 | 493.438 | 498.688 | 503.938 | 509.313 | 514.500 | 519.750 | 524.938 | 530.313 | 530.313 |
| 28 48'         | 0.000   | 0.000 | 386.375 | 386.375 | 386.188 | 386.250 | 386.188 | 385.938 | 385.938 | 385.875 | 385.875 |
|                | 0.000   | 0.000 | 493.188 | 498.563 | 503.813 | 509.125 | 514.438 | 519.688 | 524.938 | 530.063 | 530.063 |
| 28 42'         | 0.000   | 0.000 | 380.375 | 380.375 | 380.250 | 380.125 | 380.125 | 379.875 | 380.000 | 379.813 | 379.813 |
|                | 0.000   | 0.000 | 493.125 | 498.438 | 503.688 | 508.938 | 514.188 | 519.500 | 524.813 | 530.063 | 530.063 |
| 28 36'         | 0.000   | 0.000 | 374.500 | 374.375 | 374.313 | 374.125 | 374.125 | 374.000 | 374.000 | 374.000 | 374.000 |
|                | 0.000   | 0.000 | 493.063 | 498.250 | 503.625 | 508.875 | 514.188 | 519.500 | 524.813 | 530.125 | 530.125 |
| 28 30'         | 0.000   | 0.000 | 368.500 | 368.313 | 368.375 | 368.313 | 368.063 | 368.000 | 367.875 | 367.875 | 367.875 |
|                | 0.000   | 0.000 | 492.938 | 498.250 | 503.500 | 508.813 | 514.000 | 519.375 | 524.625 | 529.875 | 529.875 |
| 28 24'         | 0.000   | 0.000 | 362.563 | 362.563 | 362.375 | 362.313 | 362.250 | 362.250 | 362.125 | 361.875 | 361.875 |
|                | 0.000   | 0.000 | 492.875 | 498.125 | 503.375 | 508.688 | 514.000 | 519.313 | 524.563 | 529.750 | 529.750 |
| 28 18'         | 0.000   | 0.000 | 356.500 | 356.500 | 356.438 | 356.188 | 356.125 | 356.063 | 355.938 | 356.000 | 356.000 |
|                | 0.000   | 0.000 | 492.688 | 498.063 | 503.313 | 508.625 | 513.938 | 519.125 | 524.438 | 529.875 | 529.875 |
| 28 12'         | 0.000   | 0.000 | 350.625 | 350.438 | 350.438 | 350.250 | 350.313 | 350.188 | 350.000 | 349.875 | 349.875 |
|                | 0.000   | 0.000 | 492.625 | 497.875 | 503.188 | 508.500 | 513.938 | 519.188 | 524.438 | 529.750 | 529.750 |
| 28 6'          | 0.000   | 0.000 | 344.500 | 344.375 | 344.500 | 344.188 | 344.313 | 344.063 | 343.938 | 344.000 | 344.000 |
|                | 0.000   | 0.000 | 492.375 | 497.750 | 503.188 | 508.313 | 513.813 | 518.938 | 524.313 | 529.563 | 529.563 |
| 28 0'          | 0.000   | 0.000 | 338.563 | 338.563 | 338.438 | 338.250 | 338.188 | 338.063 | 338.000 | 337.875 | 337.875 |
|                | 0.000   | 0.000 | 492.375 | 497.688 | 502.938 | 508.250 | 513.625 | 519.000 | 524.250 | 529.563 | 529.563 |
| 27 54'         | 0.000   | 0.000 | 332.750 | 332.563 | 332.250 | 332.250 | 332.313 | 332.250 | 332.125 | 332.063 | 332.063 |
|                | 0.000   | 0.000 | 492.313 | 497.625 | 502.938 | 508.188 | 513.563 | 518.875 | 524.188 | 529.563 | 529.563 |
| 27 48'         | 0.000   | 0.000 | 326.625 | 326.625 | 326.500 | 326.250 | 326.188 | 326.250 | 326.000 | 326.125 | 326.125 |
|                | 0.000   | 0.000 | 492.188 | 497.500 | 502.813 | 508.063 | 513.438 | 518.875 | 524.063 | 529.438 | 529.438 |
| 27 42'         | 0.000   | 0.000 | 320.438 | 320.500 | 320.500 | 320.438 | 320.188 | 320.188 | 320.063 | 320.063 | 320.063 |
|                | 0.000   | 0.000 | 492.063 | 497.375 | 502.750 | 508.063 | 513.438 | 518.750 | 524.063 | 529.438 | 529.438 |
| 27 36'         | 0.000   | 0.000 | 314.500 | 314.500 | 314.375 | 314.188 | 314.125 | 314.188 | 314.000 | 313.938 | 313.938 |
|                | 0.000   | 0.000 | 492.188 | 497.313 | 502.625 | 507.938 | 513.313 | 518.625 | 524.000 | 529.313 | 529.313 |
| 27 30'         | 0.000   | 0.000 | 0.000   | 308.375 | 308.375 | 308.313 | 308.188 | 308.188 | 308.125 | 307.938 | 307.938 |
|                | 0.000   | 0.000 | 0.000   | 497.125 | 502.500 | 507.938 | 513.250 | 518.563 | 523.938 | 529.250 | 529.250 |
| 27 24'         | 0.000   | 0.000 | 0.000   | 302.563 | 302.438 | 302.250 | 302.313 | 302.250 | 302.063 | 302.125 | 302.125 |
|                | 0.000   | 0.000 | 0.000   | 497.125 | 502.375 | 507.750 | 513.188 | 518.438 | 523.875 | 529.188 | 529.188 |
| 27 18'         | 0.000   | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |
|                | 0.000   | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |
| 27 12'         | 0.000   | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |
|                | 0.000   | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |
| 27 6'          | 0.000   | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |
|                | 0.000   | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |

Entry format: X.XXX - system y coordinate  
X.XXX - system x coordinate

TABLE 4. EDARC X-Y POSITION IN MILES  
AT 1000 FEET ALTITUDE (CONTINUED)

|        | 95 0'              | 94 54'             | 94 48'             | 94 42'             | 94 36'             | 94 30'             | 94 24'             | 94 18'             | 94 12'             | 94 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 397.688<br>535.500 | 397.750<br>540.875 | 397.688<br>546.188 | 397.625<br>551.313 | 397.563<br>556.563 | 397.625<br>561.938 | 397.563<br>567.188 | 397.375<br>572.250 | 397.563<br>577.625 | 397.500<br>582.813 |
| 28 54' | 391.938<br>535.563 | 391.750<br>540.750 | 391.625<br>546.063 | 391.625<br>551.188 | 391.563<br>556.500 | 391.563<br>561.750 | 391.500<br>567.000 | 391.438<br>572.250 | 391.500<br>577.625 | 391.500<br>582.813 |
| 28 48' | 385.813<br>535.375 | 385.625<br>540.625 | 385.625<br>545.875 | 385.688<br>551.313 | 385.625<br>556.500 | 385.688<br>561.875 | 385.563<br>567.000 | 385.500<br>572.313 | 385.563<br>577.563 | 385.500<br>582.750 |
| 28 42' | 379.875<br>535.313 | 379.625<br>540.625 | 379.750<br>545.875 | 379.813<br>551.188 | 379.688<br>556.563 | 379.500<br>561.688 | 379.625<br>567.063 | 379.563<br>572.250 | 379.563<br>577.500 | 379.438<br>582.688 |
| 28 36' | 373.813<br>535.188 | 373.750<br>540.438 | 373.688<br>545.875 | 373.625<br>551.063 | 373.750<br>556.438 | 373.625<br>561.625 | 373.688<br>566.938 | 373.625<br>572.188 | 373.563<br>577.563 | 373.563<br>582.750 |
| 28 30' | 368.000<br>535.250 | 367.875<br>540.500 | 367.688<br>545.750 | 367.750<br>551.125 | 367.750<br>556.438 | 367.625<br>561.563 | 367.688<br>567.000 | 367.563<br>572.188 | 367.625<br>577.438 | 367.563<br>582.813 |
| 28 24' | 362.000<br>535.188 | 361.750<br>540.438 | 361.813<br>545.750 | 361.813<br>551.063 | 361.750<br>556.313 | 361.688<br>561.500 | 361.688<br>566.938 | 361.625<br>572.250 | 361.563<br>577.500 | 361.625<br>582.688 |
| 28 18' | 356.000<br>535.125 | 355.813<br>540.313 | 355.750<br>545.625 | 355.750<br>550.938 | 355.750<br>556.313 | 355.625<br>561.500 | 355.688<br>566.938 | 355.750<br>572.188 | 355.688<br>577.438 | 355.625<br>582.750 |
| 28 12' | 349.875<br>535.000 | 349.813<br>540.313 | 349.813<br>545.563 | 349.875<br>550.938 | 349.688<br>556.250 | 349.625<br>561.500 | 349.688<br>566.750 | 349.625<br>572.063 | 349.625<br>577.438 | 349.563<br>582.625 |
| 28 6'  | 343.875<br>534.875 | 343.875<br>540.250 | 343.875<br>545.563 | 343.750<br>550.875 | 343.688<br>556.063 | 343.688<br>561.500 | 343.625<br>566.813 | 343.750<br>572.125 | 343.563<br>577.313 | 343.625<br>582.625 |
| 28 0'  | 337.875<br>534.938 | 337.938<br>540.250 | 337.875<br>545.563 | 337.875<br>550.813 | 337.688<br>556.125 | 337.750<br>561.438 | 337.625<br>566.813 | 337.813<br>572.125 | 337.688<br>577.313 | 337.688<br>582.688 |
| 27 54' | 331.875<br>534.813 | 331.813<br>540.125 | 331.813<br>545.438 | 331.750<br>550.688 | 331.688<br>556.000 | 331.813<br>561.438 | 331.688<br>566.688 | 331.563<br>572.063 | 331.750<br>577.500 | 331.688<br>582.750 |
| 27 48' | 326.063<br>534.750 | 325.938<br>540.063 | 325.813<br>545.438 | 325.875<br>550.813 | 325.875<br>556.188 | 325.750<br>561.438 | 325.688<br>566.625 | 325.688<br>572.125 | 325.563<br>577.375 | 325.625<br>582.688 |
| 27 42' | 319.938<br>534.688 | 319.875<br>540.063 | 319.750<br>545.375 | 319.875<br>550.750 | 319.750<br>556.000 | 319.750<br>561.313 | 319.750<br>566.688 | 319.813<br>572.063 | 319.750<br>577.438 | 319.813<br>582.688 |
| 27 36' | 314.000<br>534.625 | 313.875<br>540.000 | 313.938<br>545.375 | 313.750<br>550.688 | 313.750<br>556.000 | 313.688<br>561.313 | 313.688<br>566.688 | 313.688<br>571.938 | 313.688<br>577.375 | 313.688<br>582.625 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 4. EDARC X-Y POSITION IN MILES  
AT 1000 FEET ALTITUDE (CONTINUED)

|        | 94 0'              | 93 54'             | 93 48'             | 93 42'             | 93 36'             | 93 30'             | 93 24'             | 93 18'             | 93 12'             | 93 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 397.375<br>588.063 | 397.375<br>593.250 | 397.438<br>598.438 | 397.438<br>603.813 | 397.500<br>609.063 | 397.438<br>614.375 | 397.500<br>619.500 | 397.563<br>624.750 | 397.563<br>630.125 | 397.688<br>635.313 |
| 28 54' | 391.438<br>588.125 | 391.313<br>593.250 | 391.438<br>598.688 | 391.375<br>603.688 | 391.438<br>609.000 | 391.563<br>614.375 | 391.438<br>619.688 | 391.563<br>624.750 | 391.563<br>630.125 | 391.688<br>635.375 |
| 28 48' | 385.438<br>588.000 | 385.438<br>593.313 | 385.500<br>598.500 | 385.438<br>603.750 | 385.563<br>609.125 | 385.500<br>614.375 | 385.563<br>619.500 | 385.500<br>624.875 | 385.563<br>630.125 | 385.688<br>635.375 |
| 28 42' | 379.438<br>588.063 | 379.500<br>593.250 | 379.500<br>598.500 | 379.500<br>603.750 | 379.500<br>609.063 | 379.563<br>614.375 | 379.563<br>619.563 | 379.688<br>625.000 | 379.625<br>630.188 | 379.688<br>635.500 |
| 28 36' | 373.438<br>587.938 | 373.500<br>593.188 | 373.563<br>598.625 | 373.500<br>603.813 | 373.500<br>609.063 | 373.625<br>614.375 | 373.563<br>619.625 | 373.625<br>624.875 | 373.688<br>630.125 | 373.688<br>635.438 |
| 28 30' | 367.563<br>588.000 | 367.563<br>593.375 | 367.563<br>598.625 | 367.625<br>603.875 | 367.625<br>609.188 | 367.625<br>614.500 | 367.688<br>619.750 | 367.625<br>625.000 | 367.688<br>630.250 | 367.750<br>635.500 |
| 28 24' | 361.500<br>588.063 | 361.563<br>593.250 | 361.500<br>598.438 | 361.625<br>603.875 | 361.625<br>609.063 | 361.625<br>614.375 | 361.688<br>619.688 | 361.688<br>625.000 | 361.625<br>630.250 | 361.813<br>635.625 |
| 28 18' | 355.625<br>588.000 | 355.563<br>593.188 | 355.625<br>598.625 | 355.625<br>603.938 | 355.688<br>609.188 | 355.625<br>614.500 | 355.688<br>619.813 | 355.750<br>625.063 | 355.813<br>630.250 | 355.813<br>635.625 |
| 28 12' | 349.688<br>588.125 | 349.625<br>593.313 | 349.688<br>598.563 | 349.625<br>603.938 | 349.563<br>609.188 | 349.750<br>614.438 | 349.688<br>619.813 | 349.813<br>625.063 | 349.813<br>630.313 | 349.875<br>635.625 |
| 28 6'  | 343.688<br>588.125 | 343.625<br>593.250 | 343.688<br>598.625 | 343.688<br>603.875 | 343.625<br>609.250 | 343.688<br>614.375 | 343.750<br>619.813 | 343.750<br>625.188 | 343.750<br>630.375 | 343.875<br>635.750 |
| 28 0'  | 337.688<br>588.000 | 337.563<br>593.313 | 337.688<br>598.625 | 337.750<br>603.938 | 337.750<br>609.250 | 337.813<br>614.500 | 337.813<br>619.875 | 337.813<br>625.125 | 337.750<br>630.375 | 337.813<br>635.688 |
| 27 54' | 331.688<br>588.125 | 331.750<br>593.375 | 331.625<br>598.563 | 331.750<br>603.938 | 331.688<br>609.250 | 331.688<br>614.500 | 331.813<br>619.813 | 331.813<br>625.188 | 331.875<br>630.500 | 331.875<br>635.750 |
| 27 48' | 325.625<br>588.000 | 325.625<br>593.375 | 325.625<br>598.625 | 325.750<br>604.000 | 325.750<br>609.313 | 325.688<br>614.563 | 325.750<br>619.813 | 325.875<br>625.188 | 325.938<br>630.500 | 325.813<br>635.875 |
| 27 42' | 319.688<br>588.000 | 319.688<br>593.313 | 319.625<br>598.688 | 319.688<br>604.000 | 319.688<br>609.313 | 319.750<br>614.688 | 319.813<br>620.000 | 319.938<br>625.313 | 319.938<br>630.563 | 319.938<br>635.875 |
| 27 36' | 313.688<br>587.938 | 313.625<br>593.313 | 313.813<br>598.688 | 313.750<br>604.000 | 313.750<br>609.313 | 313.813<br>614.625 | 313.750<br>620.000 | 313.813<br>625.250 | 313.813<br>630.625 | 314.000<br>635.938 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 4. EDARC X-Y POSITION IN MILES  
AT 1000 FEET ALTITUDE (CONTINUED)

|        | 93 0'              | 92 54'             | 92 48'             | 92 42'             | 92 36'             | 92 30'             | 92 24'             | 92 18'             | 92 12'             | 92 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 397.625<br>640.500 | 397.625<br>645.813 | 397.750<br>650.875 | 397.750<br>656.188 | 397.875<br>661.500 | 397.875<br>666.750 | 398.000<br>671.875 | 398.063<br>677.063 | 398.125<br>682.500 | 398.250<br>687.750 |
| 28 54' | 391.625<br>640.500 | 391.750<br>645.750 | 391.688<br>651.188 | 391.813<br>656.250 | 391.875<br>661.500 | 391.875<br>666.938 | 392.000<br>672.063 | 392.063<br>677.250 | 392.250<br>682.563 | 392.250<br>687.813 |
| 28 48' | 385.688<br>640.688 | 385.750<br>645.875 | 385.750<br>651.063 | 385.938<br>656.375 | 385.938<br>661.688 | 385.938<br>666.875 | 386.063<br>672.250 | 386.250<br>677.250 | 386.313<br>682.625 | 386.375<br>687.813 |
| 28 42' | 379.750<br>640.625 | 379.750<br>646.000 | 379.750<br>651.125 | 379.875<br>656.563 | 379.938<br>661.688 | 380.063<br>666.938 | 380.063<br>672.188 | 380.188<br>677.375 | 380.250<br>682.688 | 380.313<br>688.000 |
| 28 36' | 373.750<br>640.688 | 373.875<br>646.063 | 373.875<br>651.250 | 374.000<br>656.563 | 373.938<br>661.813 | 374.063<br>667.063 | 374.125<br>672.313 | 374.250<br>677.625 | 374.313<br>682.813 | 374.438<br>688.188 |
| 28 30' | 367.813<br>640.750 | 367.750<br>646.063 | 367.875<br>651.438 | 368.000<br>656.563 | 368.000<br>661.875 | 368.063<br>667.188 | 368.125<br>672.313 | 368.250<br>677.688 | 368.375<br>682.938 | 368.375<br>688.125 |
| 28 24' | 361.875<br>640.875 | 361.875<br>646.063 | 362.000<br>651.438 | 361.938<br>656.750 | 362.063<br>662.000 | 362.125<br>667.250 | 362.313<br>672.500 | 362.313<br>677.688 | 362.438<br>683.063 | 362.500<br>688.375 |
| 28 18' | 355.813<br>640.938 | 355.875<br>646.250 | 355.938<br>651.500 | 355.938<br>656.813 | 356.125<br>662.063 | 356.188<br>667.313 | 356.250<br>672.563 | 356.313<br>677.875 | 356.375<br>683.188 | 356.563<br>688.500 |
| 28 12' | 349.813<br>641.000 | 349.875<br>646.313 | 350.000<br>651.563 | 350.000<br>656.813 | 350.125<br>662.125 | 350.250<br>667.438 | 350.313<br>672.688 | 350.500<br>677.938 | 350.563<br>683.250 | 350.688<br>688.500 |
| 28 6'  | 343.938<br>640.938 | 344.000<br>646.313 | 343.938<br>651.563 | 344.000<br>656.938 | 344.188<br>662.250 | 344.250<br>667.500 | 344.313<br>672.750 | 344.438<br>678.000 | 344.500<br>683.375 | 344.563<br>688.625 |
| 28 0'  | 337.938<br>641.000 | 338.000<br>646.313 | 337.938<br>651.688 | 338.125<br>657.000 | 338.188<br>662.250 | 338.188<br>667.625 | 338.313<br>672.813 | 338.313<br>678.063 | 338.563<br>683.500 | 338.563<br>688.813 |
| 27 54' | 331.875<br>641.125 | 332.000<br>646.500 | 332.125<br>651.688 | 332.063<br>657.125 | 332.188<br>662.375 | 332.125<br>667.875 | 332.375<br>672.938 | 332.313<br>678.563 | 332.563<br>683.563 | 332.125<br>688.938 |
| 27 48' | 326.000<br>641.125 | 325.875<br>646.563 | 326.000<br>651.750 | 326.000<br>657.688 | 326.188<br>662.438 | 326.000<br>668.250 | 326.375<br>673.063 | 326.125<br>679.188 | 326.625<br>683.688 | 326.125<br>689.563 |
| 27 42' | 320.000<br>641.188 | 319.938<br>646.938 | 320.125<br>651.875 | 320.000<br>658.063 | 320.313<br>662.563 | 320.125<br>668.750 | 320.563<br>673.188 | 320.250<br>679.625 | 320.625<br>683.813 | 319.938<br>690.250 |
| 27 36' | 314.063<br>641.313 | 313.750<br>647.188 | 314.125<br>652.000 | 313.813<br>658.688 | 314.250<br>662.625 | 314.500<br>673.250 | 314.500<br>673.250 | 314.125<br>680.125 | 314.625<br>683.938 | 313.875<br>690.938 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 4. EDARC X-Y POSITION IN MILES  
AT 1000 FEET ALTITUDE (CONTINUED)

|        | 92 0'              | 91 54'             | 91 48'             | 91 42'             | 91 36'             | 91 30'             | 91 24'             | 91 18'             | 91 12'             | 91 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 398.375<br>692.750 | 398.438<br>698.125 | 398.563<br>703.375 | 398.688<br>708.625 | 398.875<br>713.875 | 399.000<br>719.125 | 399.063<br>724.313 | 399.188<br>729.563 | 399.250<br>734.750 | 399.438<br>739.875 |
| 28 54' | 392.375<br>693.063 | 392.500<br>698.188 | 392.563<br>703.563 | 392.813<br>708.688 | 392.875<br>714.125 | 392.938<br>719.188 | 393.125<br>724.438 | 393.188<br>729.813 | 393.438<br>734.938 | 393.563<br>740.125 |
| 28 48' | 386.500<br>693.000 | 386.563<br>698.313 | 386.688<br>703.688 | 386.813<br>708.813 | 386.813<br>714.188 | 387.063<br>719.375 | 387.125<br>724.625 | 387.250<br>729.813 | 387.313<br>735.125 | 387.563<br>740.313 |
| 28 42' | 380.563<br>693.313 | 380.625<br>698.563 | 380.688<br>703.688 | 380.875<br>709.000 | 380.938<br>714.313 | 381.125<br>719.500 | 381.125<br>724.750 | 381.250<br>730.063 | 381.375<br>735.313 | 381.563<br>740.500 |
| 28 36' | 374.500<br>693.250 | 374.688<br>698.688 | 374.750<br>703.875 | 374.813<br>709.125 | 375.000<br>714.313 | 375.125<br>719.688 | 375.250<br>725.000 | 375.375<br>730.063 | 375.500<br>735.375 | 375.688<br>740.688 |
| 28 30' | 368.500<br>693.500 | 368.625<br>698.750 | 368.813<br>703.938 | 368.938<br>709.375 | 369.000<br>714.438 | 369.188<br>719.813 | 369.250<br>725.125 | 369.375<br>730.313 | 369.500<br>735.688 | 369.688<br>740.813 |
| 28 24' | 362.563<br>693.625 | 362.750<br>698.875 | 362.813<br>704.188 | 362.938<br>709.500 | 363.063<br>714.563 | 363.188<br>719.875 | 363.313<br>725.250 | 363.438<br>730.375 | 363.500<br>735.750 | 363.750<br>741.063 |
| 28 18' | 356.563<br>693.750 | 356.688<br>699.000 | 356.938<br>704.250 | 357.000<br>709.625 | 357.125<br>714.813 | 357.188<br>720.063 | 357.313<br>725.375 | 357.438<br>730.625 | 357.563<br>735.938 | 357.813<br>741.313 |
| 28 12' | 350.750<br>693.875 | 350.688<br>699.125 | 350.875<br>704.375 | 351.000<br>709.625 | 351.188<br>714.938 | 351.250<br>720.313 | 351.375<br>725.500 | 351.500<br>730.750 | 351.688<br>736.125 | 351.813<br>741.313 |
| 28 6'  | 344.688<br>693.875 | 344.938<br>699.188 | 344.938<br>704.563 | 345.063<br>709.813 | 345.188<br>715.063 | 345.313<br>720.438 | 345.438<br>725.750 | 345.500<br>730.938 | 345.625<br>736.188 | 345.813<br>741.563 |
| 28 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 333.313<br>720.688 | 333.500<br>726.063 | 333.625<br>731.250 | 333.750<br>736.625 | 333.938<br>741.938 |
| 27 48' | 326.813<br>694.313 | 326.938<br>699.563 | 327.000<br>704.938 | 327.188<br>710.250 | 327.250<br>715.563 | 327.375<br>720.813 | 327.500<br>726.188 | 327.688<br>731.500 | 327.813<br>736.813 | 328.000<br>742.125 |
| 27 42' | 320.813<br>694.500 | 320.938<br>699.750 | 321.063<br>705.000 | 321.250<br>710.438 | 321.313<br>715.688 | 321.375<br>721.000 | 321.563<br>726.313 | 321.688<br>731.625 | 321.875<br>737.000 | 322.000<br>742.313 |
| 27 36' | 314.875<br>694.563 | 315.000<br>699.875 | 315.188<br>705.250 | 315.250<br>710.500 | 315.313<br>715.813 | 315.500<br>721.250 | 315.563<br>726.563 | 315.750<br>731.750 | 315.813<br>737.125 | 316.063<br>742.438 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 4. EDARC X-Y POSITION IN MILES  
AT 1000 FEET ALTITUDE (CONTINUED)

|        | 91 0'              | 90 54'             | 90 48'             | 90 42'             | 90 36'             | 90 30'             | 90 24'             | 90 18'         | 90 12'         | 90 6'          |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------|----------------|----------------|
| 29 0'  | 399.688<br>745.250 | 399.813<br>750.438 | 399.875<br>755.688 | 400.063<br>761.000 | 400.250<br>766.125 | 400.438<br>771.438 | 400.563<br>776.688 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 54' | 393.625<br>745.438 | 393.813<br>750.563 | 394.000<br>755.813 | 394.250<br>761.000 | 394.313<br>766.375 | 394.375<br>771.625 | 394.688<br>776.813 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 48' | 387.750<br>745.625 | 387.938<br>750.813 | 387.938<br>756.125 | 388.250<br>761.375 | 388.375<br>766.625 | 388.563<br>771.813 | 388.750<br>776.938 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 42' | 381.688<br>745.313 | 381.875<br>751.000 | 382.000<br>756.313 | 382.125<br>761.563 | 382.313<br>766.750 | 382.563<br>772.000 | 382.813<br>777.125 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 36' | 375.813<br>746.000 | 376.000<br>751.250 | 376.188<br>756.438 | 376.375<br>761.688 | 376.563<br>766.938 | 376.563<br>772.188 | 376.875<br>777.438 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 30' | 369.750<br>746.125 | 370.000<br>751.375 | 370.250<br>756.625 | 370.313<br>761.938 | 370.625<br>767.188 | 370.625<br>772.438 | 370.938<br>777.563 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 24' | 363.813<br>746.375 | 364.125<br>751.563 | 364.250<br>756.875 | 364.375<br>762.125 | 364.625<br>767.375 | 364.625<br>772.625 | 365.063<br>777.875 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 18' | 357.375<br>746.438 | 358.063<br>751.750 | 358.313<br>757.000 | 358.438<br>762.313 | 358.625<br>767.438 | 358.750<br>772.875 | 358.938<br>778.188 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 12' | 352.000<br>746.625 | 352.188<br>751.875 | 352.250<br>757.313 | 352.500<br>762.500 | 352.625<br>767.813 | 352.813<br>773.000 | 353.063<br>778.438 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 6'  | 346.000<br>746.875 | 346.250<br>752.063 | 346.250<br>757.438 | 346.563<br>762.688 | 346.688<br>768.063 | 346.875<br>773.188 | 347.125<br>778.563 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 0'  | 340.000<br>747.063 | 340.188<br>752.313 | 340.375<br>757.563 | 340.500<br>762.875 | 340.688<br>768.125 | 341.000<br>773.500 | 341.125<br>778.750 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 54' | 334.063<br>747.188 | 334.250<br>752.500 | 334.375<br>757.813 | 334.625<br>763.063 | 334.750<br>768.375 | 334.938<br>773.750 | 335.125<br>779.000 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 48' | 328.188<br>747.375 | 328.250<br>752.750 | 328.438<br>757.938 | 328.625<br>763.313 | 328.750<br>768.688 | 328.938<br>774.000 | 329.188<br>779.250 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 42' | 322.125<br>747.625 | 322.313<br>752.938 | 322.438<br>758.313 | 322.625<br>763.500 | 322.813<br>768.813 | 323.063<br>774.125 | 323.250<br>779.375 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 36' | 316.125<br>747.813 | 316.375<br>753.125 | 316.500<br>758.438 | 316.750<br>763.688 | 316.938<br>768.938 | 317.063<br>774.313 | 317.313<br>779.563 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |

TABLE 5. EDARC X-Y POSITION IN MILES  
AT 4900 FEET ALTITUDE

| Lat<br>Deg Min | Lon --><br>Deg Min |       | 95 54'  | 95 48'  | 95 42'  | 95 36'  | 95 30'  | 95 24'  | 95 18'  | 95 12'  | 95 6' |
|----------------|--------------------|-------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
|                | 96                 | 00'   |         |         |         |         |         |         |         |         |       |
| 29 0'          | 0.000              | 0.000 | 398.375 | 398.375 | 398.125 | 398.125 | 397.938 | 397.938 | 397.938 | 397.750 |       |
|                | 0.000              | 0.000 | 493.563 | 498.688 | 503.938 | 509.188 | 514.563 | 519.813 | 525.063 | 530.250 |       |
| 28 54'         | 0.000              | 0.000 | 392.563 | 392.375 | 392.250 | 392.250 | 392.063 | 391.938 | 391.875 | 391.938 |       |
|                | 0.000              | 0.000 | 493.438 | 498.688 | 503.938 | 509.188 | 514.500 | 519.750 | 524.938 | 530.313 |       |
| 28 48'         | 0.000              | 0.000 | 386.375 | 386.375 | 386.188 | 386.250 | 386.188 | 386.063 | 385.938 | 385.875 |       |
|                | 0.000              | 0.000 | 493.188 | 498.563 | 503.813 | 509.125 | 514.438 | 519.563 | 524.938 | 530.063 |       |
| 28 42'         | 0.000              | 0.000 | 380.375 | 380.375 | 380.250 | 380.125 | 380.125 | 380.000 | 380.000 | 379.875 |       |
|                | 0.000              | 0.000 | 493.125 | 498.438 | 503.688 | 508.938 | 514.188 | 519.375 | 524.813 | 529.938 |       |
| 28 36'         | 0.000              | 0.000 | 374.500 | 374.375 | 374.313 | 374.188 | 374.125 | 374.063 | 374.000 | 374.000 |       |
|                | 0.000              | 0.000 | 493.063 | 498.250 | 503.625 | 508.750 | 514.188 | 519.438 | 524.813 | 530.125 |       |
| 28 30'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 28 24'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 28 18'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 28 12'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 28 6'          | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 28 0'          | 0.000              | 0.000 | 338.563 | 338.563 | 338.438 | 338.250 | 338.188 | 338.125 | 338.000 | 337.875 |       |
|                | 0.000              | 0.000 | 492.375 | 497.688 | 502.938 | 508.250 | 513.625 | 518.875 | 524.250 | 529.563 |       |
| 27 54'         | 0.000              | 0.000 | 332.750 | 332.563 | 332.313 | 332.250 | 332.313 | 332.250 | 332.125 | 332.063 |       |
|                | 0.000              | 0.000 | 492.313 | 497.625 | 502.813 | 508.188 | 513.563 | 518.875 | 524.188 | 529.563 |       |
| 27 48'         | 0.000              | 0.000 | 326.625 | 326.625 | 326.500 | 326.250 | 326.188 | 326.250 | 326.000 | 326.125 |       |
|                | 0.000              | 0.000 | 492.188 | 497.500 | 502.813 | 508.063 | 513.438 | 518.875 | 524.063 | 529.438 |       |
| 27 42'         | 0.000              | 0.000 | 0.000   | 320.500 | 320.500 | 320.438 | 320.188 | 320.188 | 320.063 | 320.125 |       |
|                | 0.000              | 0.000 | 0.000   | 497.375 | 502.750 | 508.063 | 513.313 | 518.750 | 524.063 | 529.313 |       |
| 27 36'         | 0.000              | 0.000 | 0.000   | 314.500 | 314.375 | 314.188 | 314.125 | 314.188 | 314.000 | 313.938 |       |
|                | 0.000              | 0.000 | 0.000   | 497.313 | 502.625 | 507.938 | 513.188 | 518.625 | 524.000 | 529.313 |       |
| 27 30'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 27 24'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 27 18'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 27 12'         | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
| 27 6'          | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |
|                | 0.000              | 0.000 | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   | 0.000   |       |

Entry Format: x.xxx - system y coordinate  
x.xxx - system x coordinate

TABLE 5. EDARC X-Y POSITION IN MILES  
AT 4900 FEET ALTITUDE (CONTINUED)

|        | 95 0'              | 94 54'             | 94 48'             | 94 42'             | 94 36'             | 94 30'             | 94 24'             | 94 18'             | 94 12'             | 94 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 397.688<br>535.500 | 397.750<br>540.875 | 397.750<br>546.125 | 397.625<br>551.313 | 397.563<br>556.563 | 397.625<br>561.938 | 397.563<br>567.188 | 397.375<br>572.250 | 397.563<br>577.625 | 397.500<br>582.813 |
| 28 54' | 391.938<br>535.563 | 391.750<br>540.750 | 391.750<br>546.000 | 391.625<br>551.188 | 391.563<br>556.500 | 391.563<br>561.750 | 391.500<br>567.000 | 391.438<br>572.250 | 391.625<br>577.563 | 391.500<br>582.813 |
| 28 48' | 385.813<br>535.375 | 385.625<br>540.625 | 385.625<br>545.875 | 385.688<br>551.313 | 385.625<br>556.500 | 385.688<br>561.875 | 385.563<br>567.000 | 385.500<br>572.313 | 385.563<br>577.563 | 385.500<br>582.750 |
| 28 42' | 379.875<br>535.313 | 379.750<br>540.563 | 379.750<br>545.875 | 379.813<br>551.188 | 379.688<br>556.563 | 379.625<br>561.625 | 379.625<br>567.063 | 379.563<br>572.250 | 379.563<br>577.500 | 379.438<br>582.688 |
| 28 36' | 373.813<br>535.188 | 373.750<br>540.438 | 373.688<br>545.875 | 373.688<br>551.000 | 373.750<br>556.438 | 373.625<br>561.625 | 373.688<br>566.938 | 373.625<br>572.188 | 373.563<br>577.563 | 373.563<br>582.750 |
| 28 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 0'  | 337.938<br>534.813 | 337.938<br>540.250 | 337.875<br>545.563 | 337.875<br>550.813 | 337.688<br>556.125 | 337.750<br>561.438 | 337.688<br>566.688 | 337.813<br>572.125 | 337.688<br>577.313 | 337.688<br>582.688 |
| 27 54' | 331.875<br>534.813 | 331.813<br>540.125 | 331.813<br>545.438 | 331.750<br>550.688 | 331.688<br>556.000 | 331.813<br>561.438 | 331.688<br>566.688 | 331.563<br>572.063 | 331.750<br>577.500 | 331.688<br>582.750 |
| 27 48' | 326.063<br>534.750 | 325.938<br>540.063 | 325.813<br>545.438 | 325.875<br>550.813 | 325.938<br>556.063 | 325.750<br>561.438 | 325.688<br>566.625 | 325.750<br>572.063 | 325.625<br>577.250 | 325.625<br>582.688 |
| 27 42' | 319.938<br>534.688 | 319.938<br>540.000 | 319.750<br>545.375 | 319.938<br>550.688 | 319.875<br>556.063 | 319.750<br>561.313 | 319.750<br>566.688 | 319.813<br>572.063 | 319.750<br>577.438 | 319.813<br>582.688 |
| 27 36' | 314.000<br>534.625 | 313.875<br>540.000 | 313.938<br>545.375 | 313.750<br>550.688 | 313.750<br>556.000 | 313.688<br>561.313 | 313.688<br>566.688 | 313.688<br>571.938 | 313.688<br>577.375 | 313.688<br>582.625 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 5. EDARC X-Y POSITION IN MILES  
AT 4900 FEET ALTITUDE (CONTINUED)

|        | 94 0'              | 93 54'             | 93 48'             | 93 42'             | 93 36'             | 93 30'             | 93 24'             | 93 18'             | 93 12'             | 93 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 30' | 367.563<br>588.000 | 367.625<br>593.250 | 367.563<br>598.625 | 367.625<br>603.875 | 367.625<br>609.188 | 367.625<br>614.500 | 367.688<br>619.750 | 367.625<br>625.000 | 367.688<br>630.250 | 367.750<br>635.500 |
| 28 24' | 361.563<br>587.938 | 361.563<br>593.250 | 361.500<br>598.438 | 361.625<br>603.875 | 361.625<br>609.063 | 361.625<br>614.375 | 361.688<br>619.688 | 361.688<br>625.000 | 361.625<br>630.250 | 361.813<br>635.625 |
| 28 18' | 355.625<br>588.000 | 355.563<br>593.188 | 355.625<br>598.625 | 355.625<br>603.938 | 355.688<br>609.188 | 355.750<br>614.375 | 355.688<br>619.813 | 355.750<br>625.063 | 355.813<br>630.250 | 355.813<br>635.625 |
| 28 12' | 349.750<br>588.000 | 349.625<br>593.313 | 349.688<br>598.563 | 349.625<br>603.938 | 349.563<br>609.188 | 349.750<br>614.438 | 349.688<br>619.813 | 349.813<br>625.063 | 349.813<br>630.313 | 349.875<br>635.625 |
| 28 6'  | 343.688<br>588.125 | 343.625<br>593.250 | 343.688<br>598.625 | 343.688<br>603.875 | 343.688<br>609.188 | 343.688<br>614.375 | 343.750<br>619.813 | 343.750<br>625.188 | 343.750<br>630.375 | 343.875<br>635.750 |
| 28 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 5. EDARC X-Y POSITION IN MILES  
AT 4900 FEET ALTITUDE (CONTINUED)

|        | 93 0'              | 92 54'             | 92 48'             | 92 42'             | 92 36'             | 92 30'             | 92 24'             | 92 18'             | 92 12'             | 92 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 30' | 367.813<br>640.750 | 367.750<br>646.063 | 367.938<br>651.375 | 368.000<br>656.563 | 368.000<br>661.875 | 368.063<br>667.188 | 368.250<br>672.313 | 368.250<br>677.688 | 368.375<br>682.938 | 368.500<br>688.125 |
| 28 24' | 361.875<br>640.875 | 361.875<br>646.063 | 362.000<br>651.438 | 361.938<br>656.750 | 362.063<br>662.000 | 362.125<br>667.250 | 362.313<br>672.500 | 362.313<br>677.688 | 362.438<br>683.063 | 362.500<br>688.375 |
| 28 18' | 355.813<br>640.938 | 355.875<br>646.250 | 355.938<br>651.500 | 355.938<br>656.813 | 356.125<br>662.063 | 356.188<br>667.313 | 356.250<br>672.563 | 356.313<br>677.875 | 356.375<br>683.188 | 356.563<br>688.500 |
| 28 12' | 349.938<br>640.938 | 350.000<br>646.313 | 350.000<br>651.563 | 350.000<br>656.813 | 350.125<br>662.125 | 350.250<br>667.438 | 350.313<br>672.688 | 350.500<br>677.938 | 350.563<br>683.250 | 350.688<br>688.500 |
| 28 6'  | 343.938<br>640.938 | 344.000<br>646.313 | 344.063<br>651.500 | 344.000<br>656.938 | 344.188<br>662.250 | 344.250<br>667.500 | 344.313<br>672.750 | 344.438<br>678.000 | 344.500<br>683.375 | 344.563<br>688.625 |
| 28 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 5. EDARC X-Y POSITION IN MILES  
AT 4900 FEET ALTITUDE (CONTINUED)

|        | 92 0'              | 91 54'             | 91 48'             | 91 42'             | 91 36'             | 91 30'             | 91 24'             | 91 18'             | 91 12'             | 91 6'              |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 29 0'  | 398.375<br>692.750 | 398.438<br>698.125 | 398.563<br>703.375 | 398.688<br>708.625 | 398.875<br>713.875 | 399.000<br>719.125 | 399.063<br>724.313 | 399.188<br>729.563 | 399.250<br>734.750 | 399.438<br>739.875 |
| 28 54' | 392.375<br>693.063 | 392.500<br>698.188 | 392.563<br>703.563 | 392.813<br>708.688 | 392.875<br>714.125 | 392.938<br>719.188 | 393.125<br>724.438 | 393.188<br>729.813 | 393.438<br>734.938 | 393.563<br>740.125 |
| 28 48' | 386.500<br>693.000 | 386.563<br>698.313 | 386.688<br>703.688 | 386.813<br>708.813 | 386.813<br>714.188 | 387.063<br>719.375 | 387.125<br>724.625 | 387.250<br>729.813 | 387.313<br>735.125 | 387.563<br>740.313 |
| 28 42' | 380.563<br>693.313 | 380.625<br>698.563 | 380.688<br>703.688 | 380.875<br>709.000 | 380.938<br>714.313 | 381.125<br>719.500 | 381.125<br>724.750 | 381.250<br>730.063 | 381.375<br>735.313 | 381.563<br>740.500 |
| 28 36' | 374.500<br>693.250 | 374.688<br>698.688 | 374.750<br>703.875 | 374.813<br>709.125 | 375.000<br>714.313 | 375.125<br>719.688 | 375.250<br>725.000 | 375.375<br>730.063 | 375.500<br>735.375 | 375.688<br>740.688 |
| 28 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 28 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     |

TABLE 5. EDARC X-Y POSITION IN MILES  
AT 4900 FEET ALTITUDE (CONTINUED)

|        | 91 0'              | 90 54'             | 90 48'             | 90 42'             | 90 36'             | 90 30'             | 90 24'             | 90 18'         | 90 12'         | 90 6'          |
|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------|----------------|----------------|
| 29 0'  | 399.688<br>745.250 | 399.813<br>750.438 | 399.875<br>755.688 | 400.063<br>761.000 | 400.250<br>766.125 | 400.438<br>771.438 | 400.563<br>776.688 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 54' | 393.625<br>745.438 | 393.813<br>750.563 | 394.000<br>755.813 | 394.125<br>760.938 | 394.313<br>766.375 | 394.375<br>771.625 | 394.688<br>776.813 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 48' | 387.750<br>745.625 | 387.938<br>750.813 | 387.938<br>756.125 | 388.125<br>761.250 | 388.375<br>766.625 | 388.563<br>771.813 | 388.750<br>776.938 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 42' | 381.688<br>745.813 | 381.875<br>751.000 | 382.000<br>756.313 | 382.125<br>761.563 | 382.313<br>766.750 | 382.563<br>772.000 | 382.813<br>777.125 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 36' | 375.813<br>746.000 | 375.875<br>751.188 | 376.063<br>756.375 | 376.375<br>761.688 | 376.563<br>766.938 | 376.563<br>772.188 | 376.875<br>777.438 | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 28 0'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 54' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 48' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 42' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 36' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 30' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 24' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 18' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 12' | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |
| 27 6'  | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000     | 0.000<br>0.000 | 0.000<br>0.000 | 0.000<br>0.000 |

Table 6 shows that a worst case occurs in the difference between system x mean error, with long held constant, for altitudes of 1000 and 4900 feet. The difference of 0.03 nmi corresponds approximately to a difference of 150 feet as displayed to the controller. This difference is below the display resolution of 1/32 nmi of the PVD. A variation of this magnitude, which results from altitude differences for targets at the same lat/long will, therefore, be indiscernible on the display.

TABLE 6. EDARC VARIATION IN NAUTICAL MILES

|                     | Constant<br>Mean | Latitude<br>SD | Constant<br>Mean | Longitude<br>SD |
|---------------------|------------------|----------------|------------------|-----------------|
| Altitude: 1000 feet |                  |                |                  |                 |
| System-x            | 0.03850          | 0.13680        | 5.97546          | 0.08900         |
| System-y            | 5.29000          | 0.33776        | -0.06193         | 0.22505         |
| Altitude: 4900 feet |                  |                |                  |                 |
| System-x            | 0.02498          | 0.11552        | 5.97505          | 0.09206         |
| System-y            | 5.25056          | 0.08919        | -0.02719         | 0.12599         |
| Altitude: 100 feet  |                  |                |                  |                 |
| System-x            | 0.04418          | 0.11975        | 5.97285          | 0.08603         |
| System-y            | 5.28336          | 0.07983        | -0.05031         | 0.13249         |

Statistics on EDARC conversion accuracy are influenced by several effects. One results from the fact that the local orientation of the system plane is not coincident with the local orientation of true north, used in lat long. This has the effect of an angular displacement of the data, whereby latitude does not correspond exactly with system y coordinates and longitude does not correspond exactly with x coordinates. The result will be a slight increase in the variation (both mean and standard deviation) of the data. This effect has not been accounted for in the data reduction because it is small in magnitude and does not affect the relative performance of the conversion process in a local area (i.e., local effects are the same for any two or more targets in the same area and have no influence on determining the separation between them).

A second effect which occurs in the transformation from lat/long to system x-y is that of converting the angular distance of lat/long in degrees into linear distance, in miles, on the surface of the Earth. This also results in a slight skewing of the statistics when comparing the two. As before, the effect occurs over a large area and will only be noticeable in statistics for the entire LOFF area. Local separation will not be affected.

#### EDARC DYNAMIC ACCURACY.

Static accuracy tests, as described above, were used to determine EDARC conversion accuracy and provide a basis for measurement of dynamic accuracy. It is this dynamic measure which provides a truer indication of performance while the system tracks actual aircraft. The difference between static and dynamic accuracy results from the influence of the tracker function in the EDARC system.

The output of the tracker-predicted position is displayed to the controller and used for separation purposes. It may be noted once again that the primary purpose of these tests was not to measure EDARC performance because it is a commissioned system. The purpose was to show the contribution of EDARC conversion and tracker accuracy to the overall performance of the LOFF system.

Dynamic accuracy was measured by comparing dynamic targets from flight testing with data collected during static simulation tests. The difference between static and dynamic results is attributed to the effects of the tracker function in EDARC. Results are presented in table 7. They show that the tracker influence causes a position shift of 1.1 nmi (mean root sum of squares value) in the displayed track position as compared to the static case. The EDARC data recording system failure noted above caused loss of all this data except for one flight.

TABLE 7. EDARC DYNAMIC ACCURACY IN NAUTICAL MILES

|           | <u>Mean</u> | <u>Standard<br/>Deviation</u> | <u>Samples</u> |
|-----------|-------------|-------------------------------|----------------|
| Latitude  | 0.60        | 0.53                          | 88             |
| Longitude | 0.89        | 0.61                          | 88             |

The position shift does not appear to be direction dependent. Results are consistent for the eastbound and westbound portions of the flight. It should also be noted that data have not been grouped according to whether they are in the steady-state or accelerated condition. EDARC does not record the types of data required for this kind of analysis. An alpha-beta tracker, such as the one implemented in EDARC, is susceptible to large errors for short periods of time when accelerations due to a turn are encountered.

COMPARATIVE PERFORMANCE IN OVERLAP AREAS.

Table 8 shows the relative differences based upon the EDARC tracked position as displayed to the controller; figure 13 shows the radar and LOFF overlap areas. The amount of this type of data was also reduced due to the failure of EDARC data recording components during the flight test. The table shows that LOFF and radar displayed position differ by 0.4 nmi in lat and 0.7 nmi in long. The root sum of squares (rss) value is 0.8 nmi.

TABLE 8. RADAR-LOFF COMPARISON IN NAUTICAL MILES

|           | <u>Mean</u> | <u>Standard<br/>Deviation</u> | <u>Samples</u> |
|-----------|-------------|-------------------------------|----------------|
| Latitude  | 0.40        | 0.72                          | 13             |
| Longitude | 0.68        | 0.58                          | 13             |

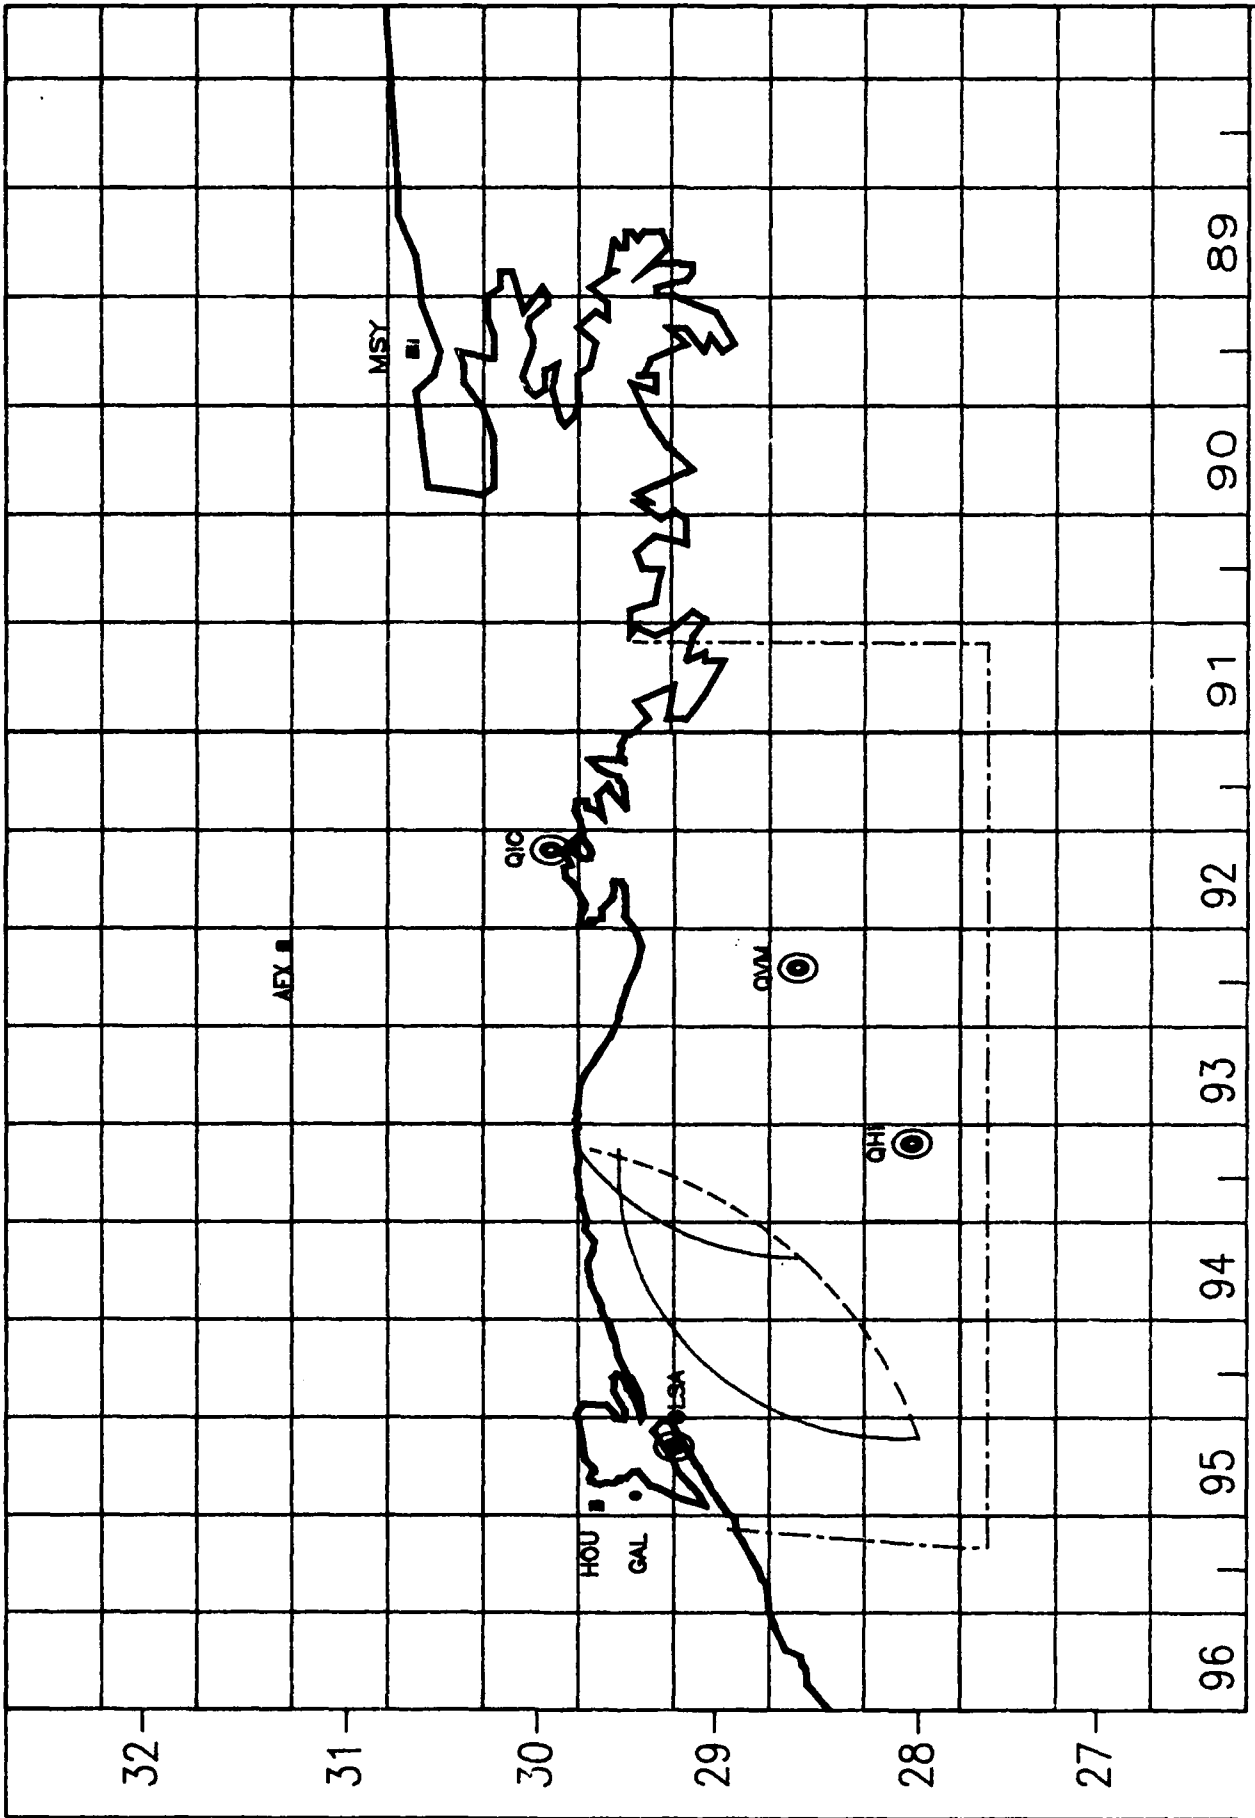


FIGURE 13. RADAR-LOFF OVERLAP AREA AT 5000 FEET ALTITUDE

## LORAN ACCURACY.

Tables 9 and 10 show the measured accuracy of both Loran receivers. A difference in performance between the two types of Loran receivers can be seen in the tables. This is due to the difference in technologies employed in their manufacture. The ONI-7000 tracks up to eight stations in four Loran chains. It is, therefore, less dependent upon station geometry than the TDL-711, which includes only three stations in its navigational solution. ONI-7000 data are fairly constant throughout the flight test area. Plots of TDL-711 accuracy are provided in figures 14 through 22. Although most of the data show very small errors, the error increases in the vicinity of Houston, as marked on the plots. This is due to station geometry and is very repeatable. The error does not exceed the limits for en route navigational accuracy as defined in Advisory Circular 90-45A. The statistics in table 10 correspond to these plots, except that outliers have been deleted from the statistics.

TABLE 9. ONI-7000 ACCURACY IN NAUTICAL MILES

| <u>Date</u> | <u>Latitude</u> |           | <u>Longitude</u> |           | <u>Samples</u> |
|-------------|-----------------|-----------|------------------|-----------|----------------|
|             | <u>Mean</u>     | <u>SD</u> | <u>Mean</u>      | <u>SD</u> |                |
| 9/10/87     | 0.05            | 0.05      | -0.01            | 0.04      | 2307           |
| 9/13/87     | 0.05            | 0.14      | 0.01             | 0.05      | 3450           |
| 9/14/87     | 0.03            | 0.08      | 0.02             | 0.05      | 6364           |
| 9/15/87     | 0.03            | 0.11      | 0.03             | 0.04      | 5128           |
| 9/20/87     | 0.01            | 0.10      | 0.03             | 0.05      | 3378           |
| 9/21/87     | 0.05            | 0.18      | 0.01             | 0.10      | 7516           |
| 9/22/87     | 0.04            | 0.43      | 0.00             | 0.18      | 6002           |
| 9/23/87     | 0.02            | 0.06      | 0.04             | 0.05      | 4672           |
| 9/24/87     | 0.02            | 0.06      | 0.04             | 0.05      | 4672           |

TABLE 10. TDL-711 ACCURACY IN NAUTICAL MILES

| <u>Date</u> | <u>Latitude</u> |           | <u>Longitude</u> |           | <u>Samples</u> |
|-------------|-----------------|-----------|------------------|-----------|----------------|
|             | <u>Mean</u>     | <u>SD</u> | <u>Mean</u>      | <u>SD</u> |                |
| 9/10/87     | -0.22           | 0.15      | -0.16            | 0.07      | 4196           |
| 9/13/87     | -0.24           | 0.10      | -0.16            | 0.05      | 7227           |
| 9/14/87     | -0.17           | 0.14      | -0.15            | 0.07      | 12592          |
| 9/15/87     | -0.15           | 0.21      | -0.12            | 0.08      | 10359          |
| 9/20/87     | -0.18           | 0.18      | -0.08            | 0.04      | 7151           |
| 9/21/87     | -0.36           | 0.18      | -0.09            | 0.07      | 15075          |
| 9/22/87     | -0.12           | 0.17      | -0.14            | 0.06      | 12626          |
| 9/23/87     | -0.13           | 0.22      | -0.09            | 0.05      | 5773           |
| 9/24/87     | -0.15           | 0.26      | -0.07            | 0.06      | 5906           |

## VHF DATA LINK COVERAGE.

Results of the data link coverage tests are presented in figures 23 through 25 and table 11. The figure shows a map of the LOFF sector with the areas of data link coverage superimposed. The coverage pattern as shown on the plot reflects the directional nature of the QVM site.

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/10/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. N J 08405

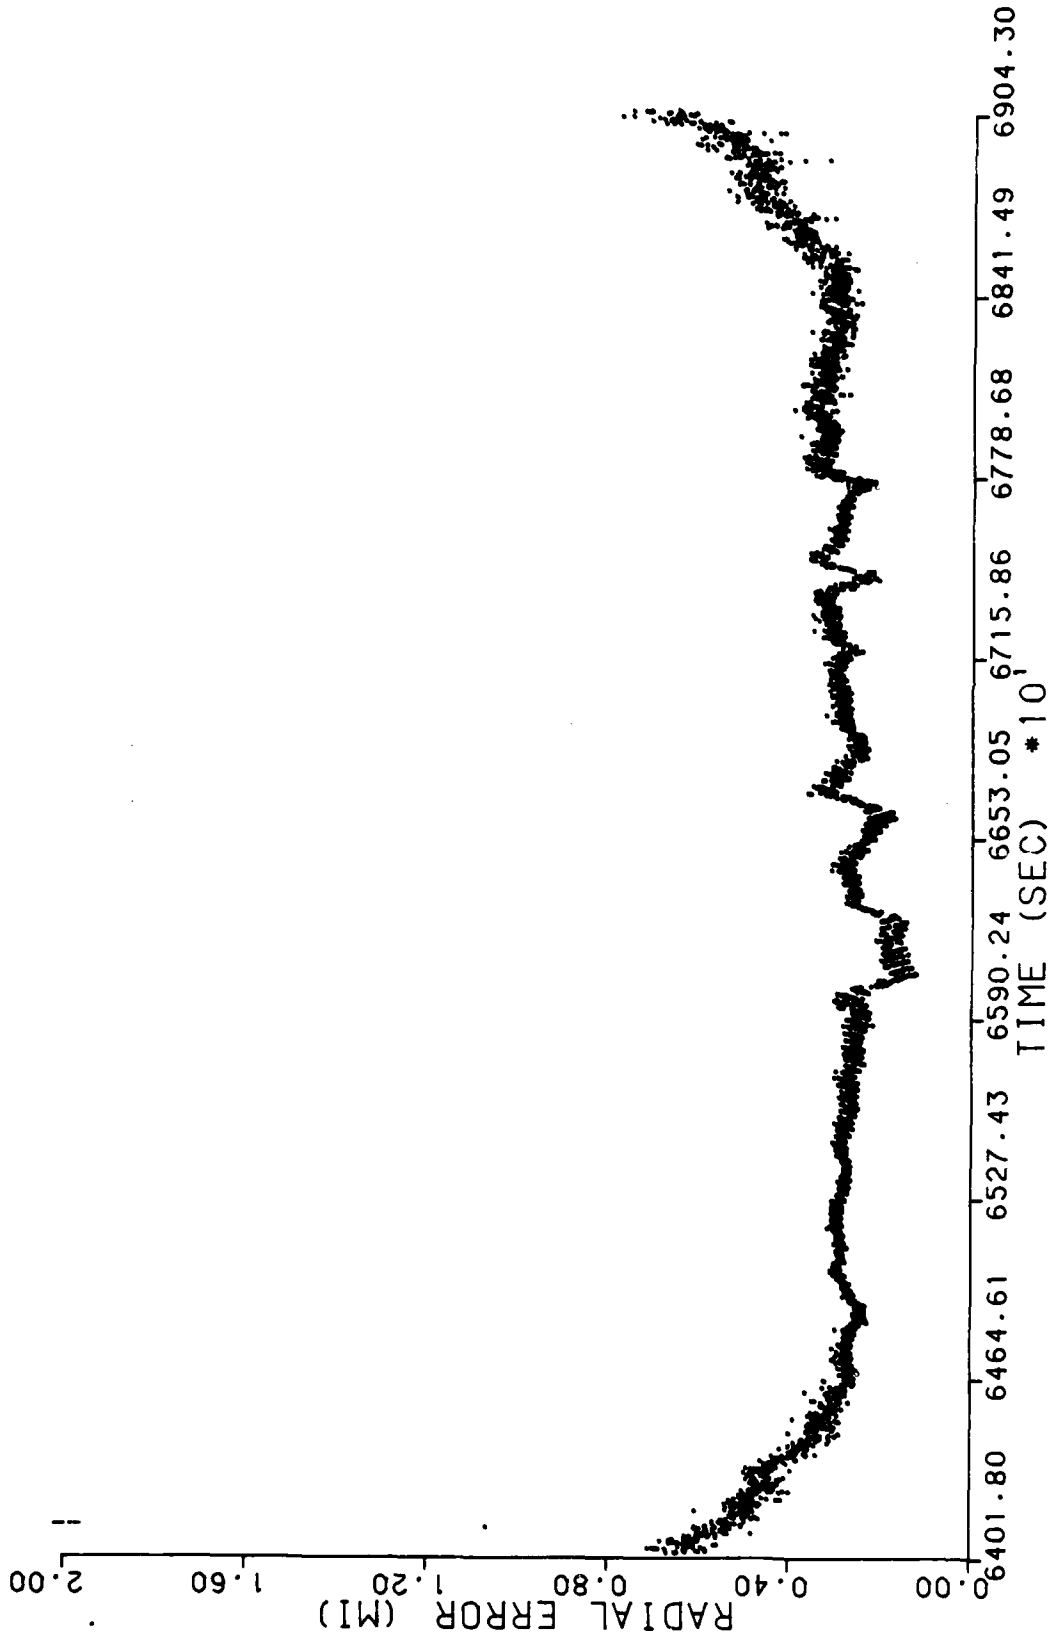


FIGURE 14. TDL-711 RADIAL ERROR - 9/10/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/13/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. N J 08403

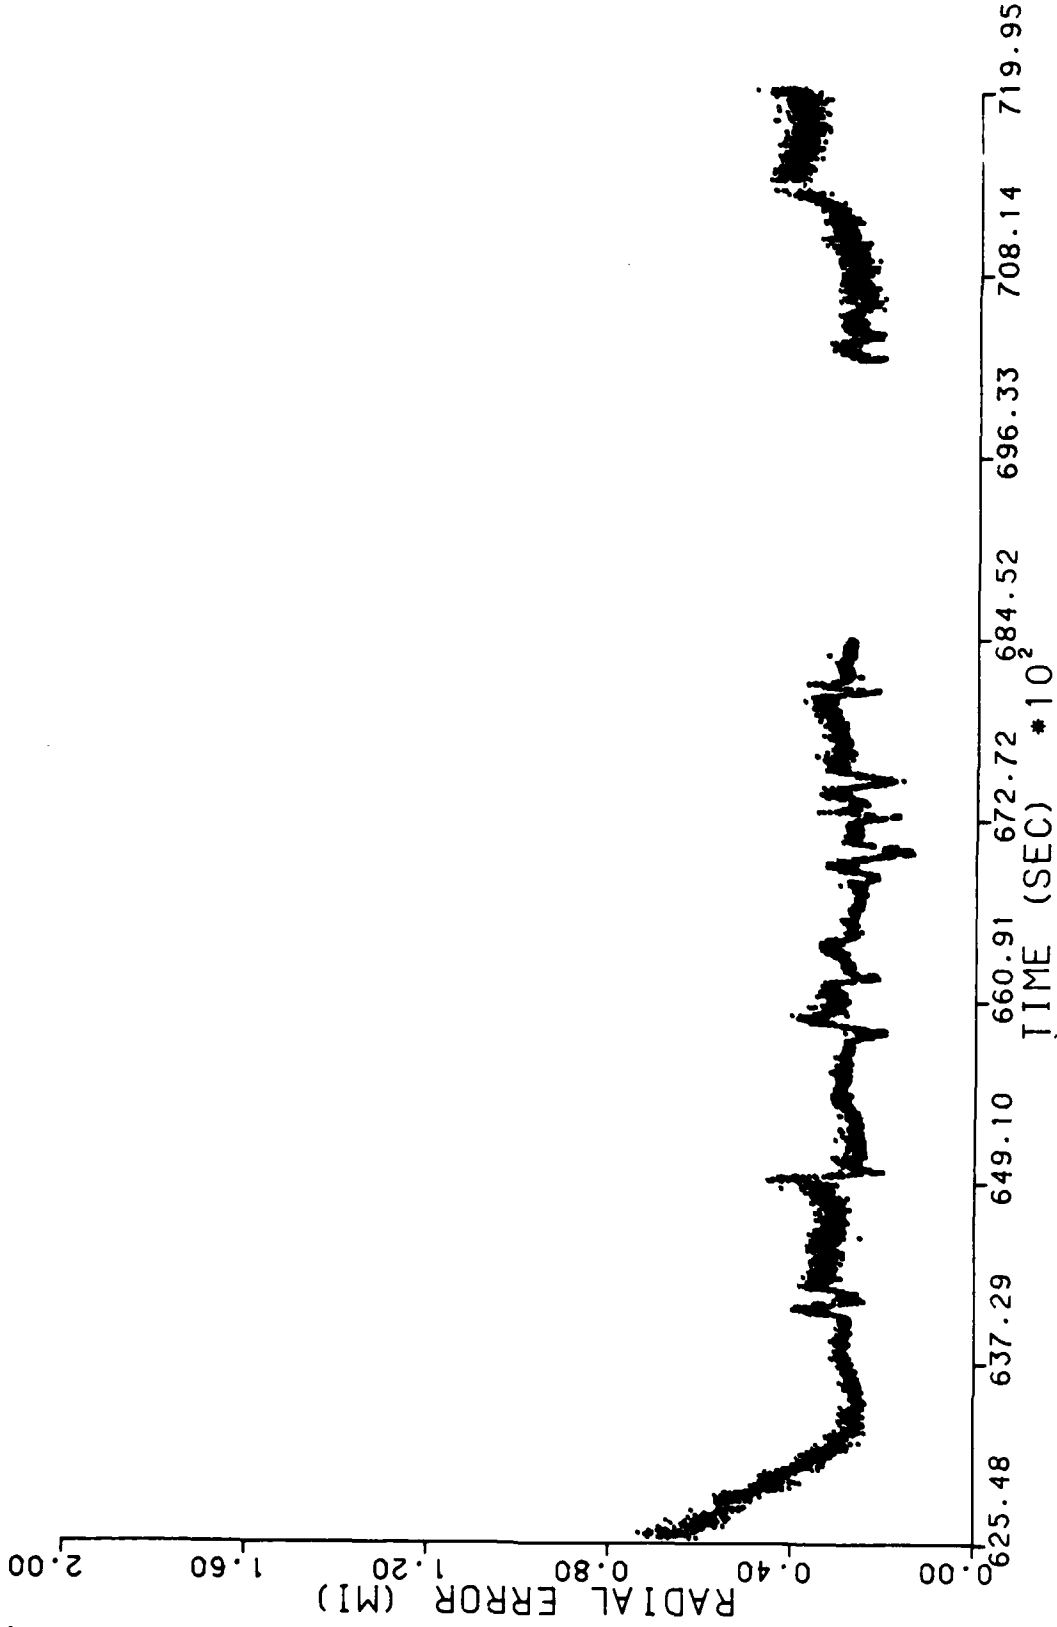


FIGURE 15. TDL-711 RADIAL ERROR - 9/13/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/14/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. N J 08403

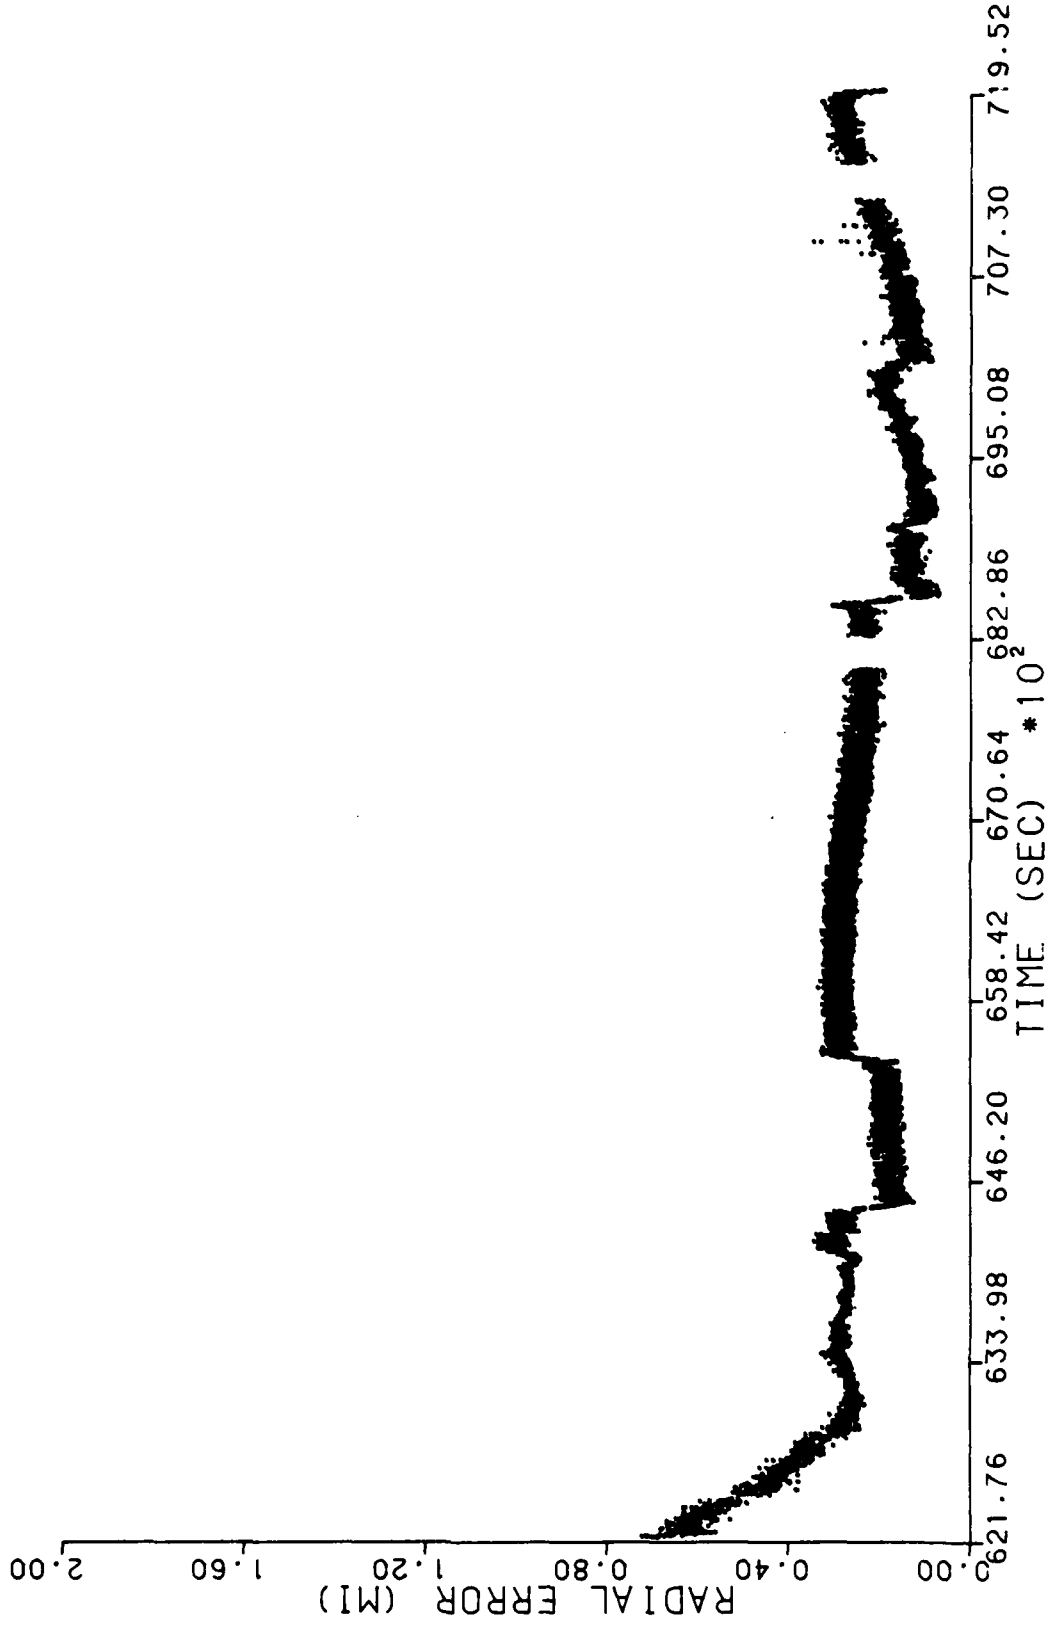


FIGURE 16. TDL-711 RADIAL ERROR - 9/14/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/15/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. H J 08403

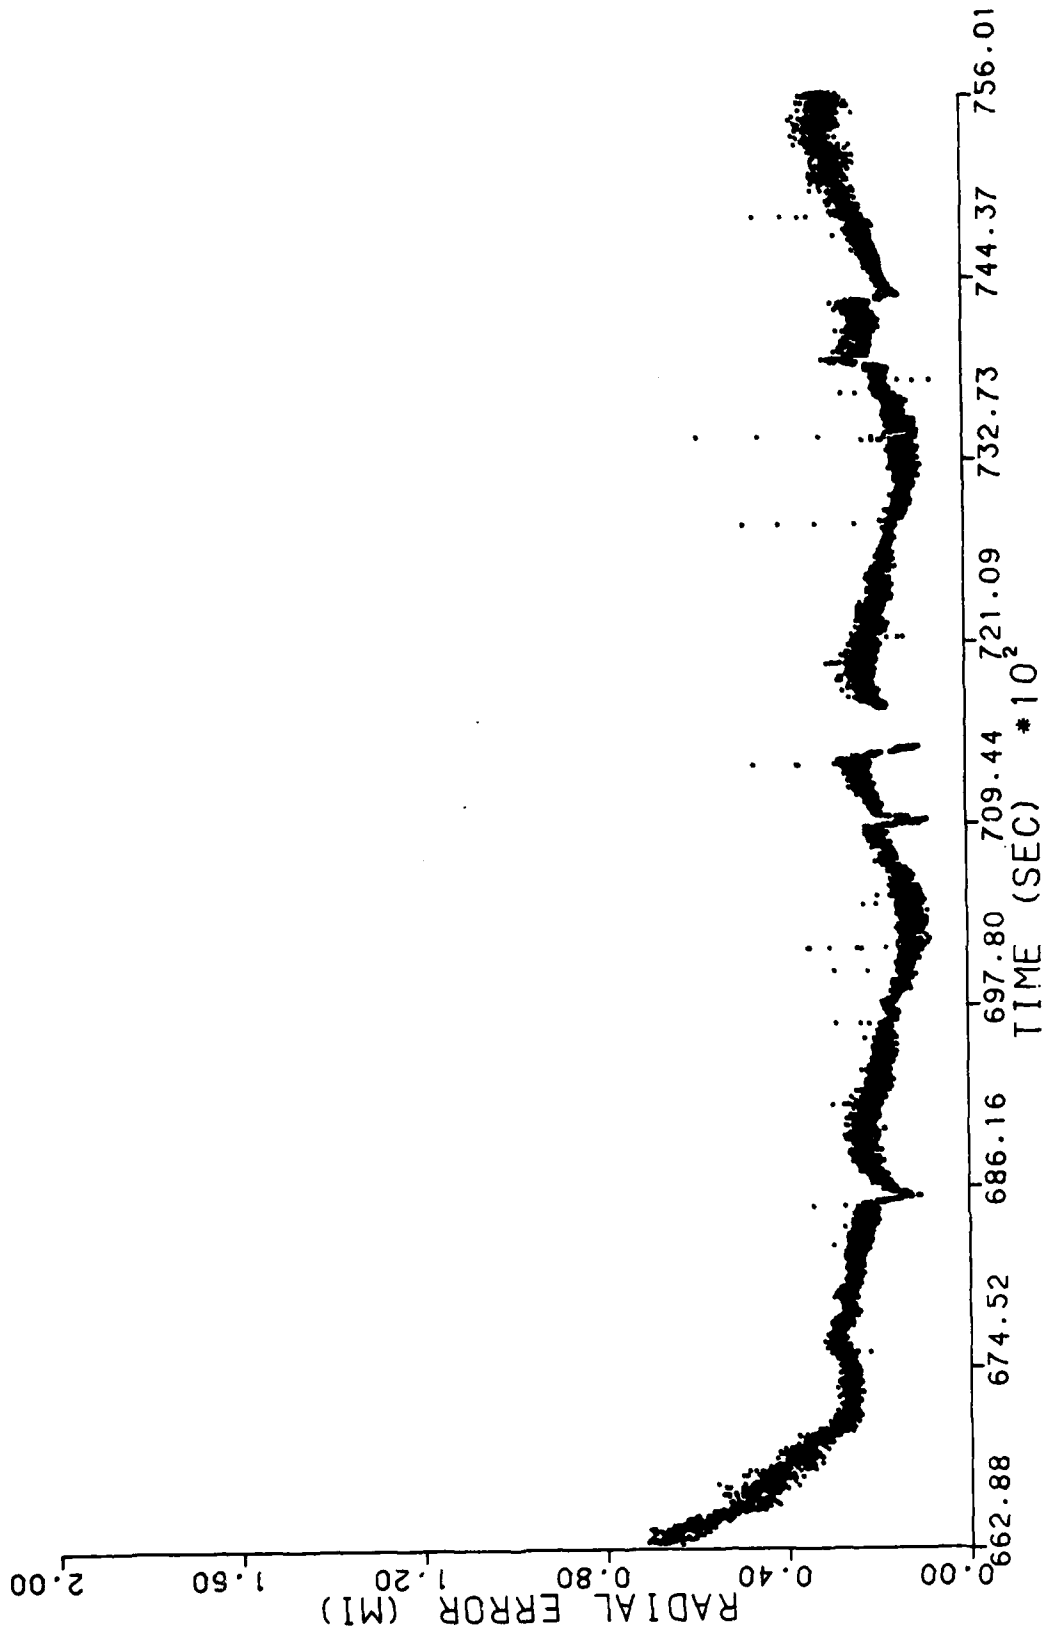


FIGURE 17. TDL-711 RADIAL ERROR - 9/15/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/20/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT, N J 08403

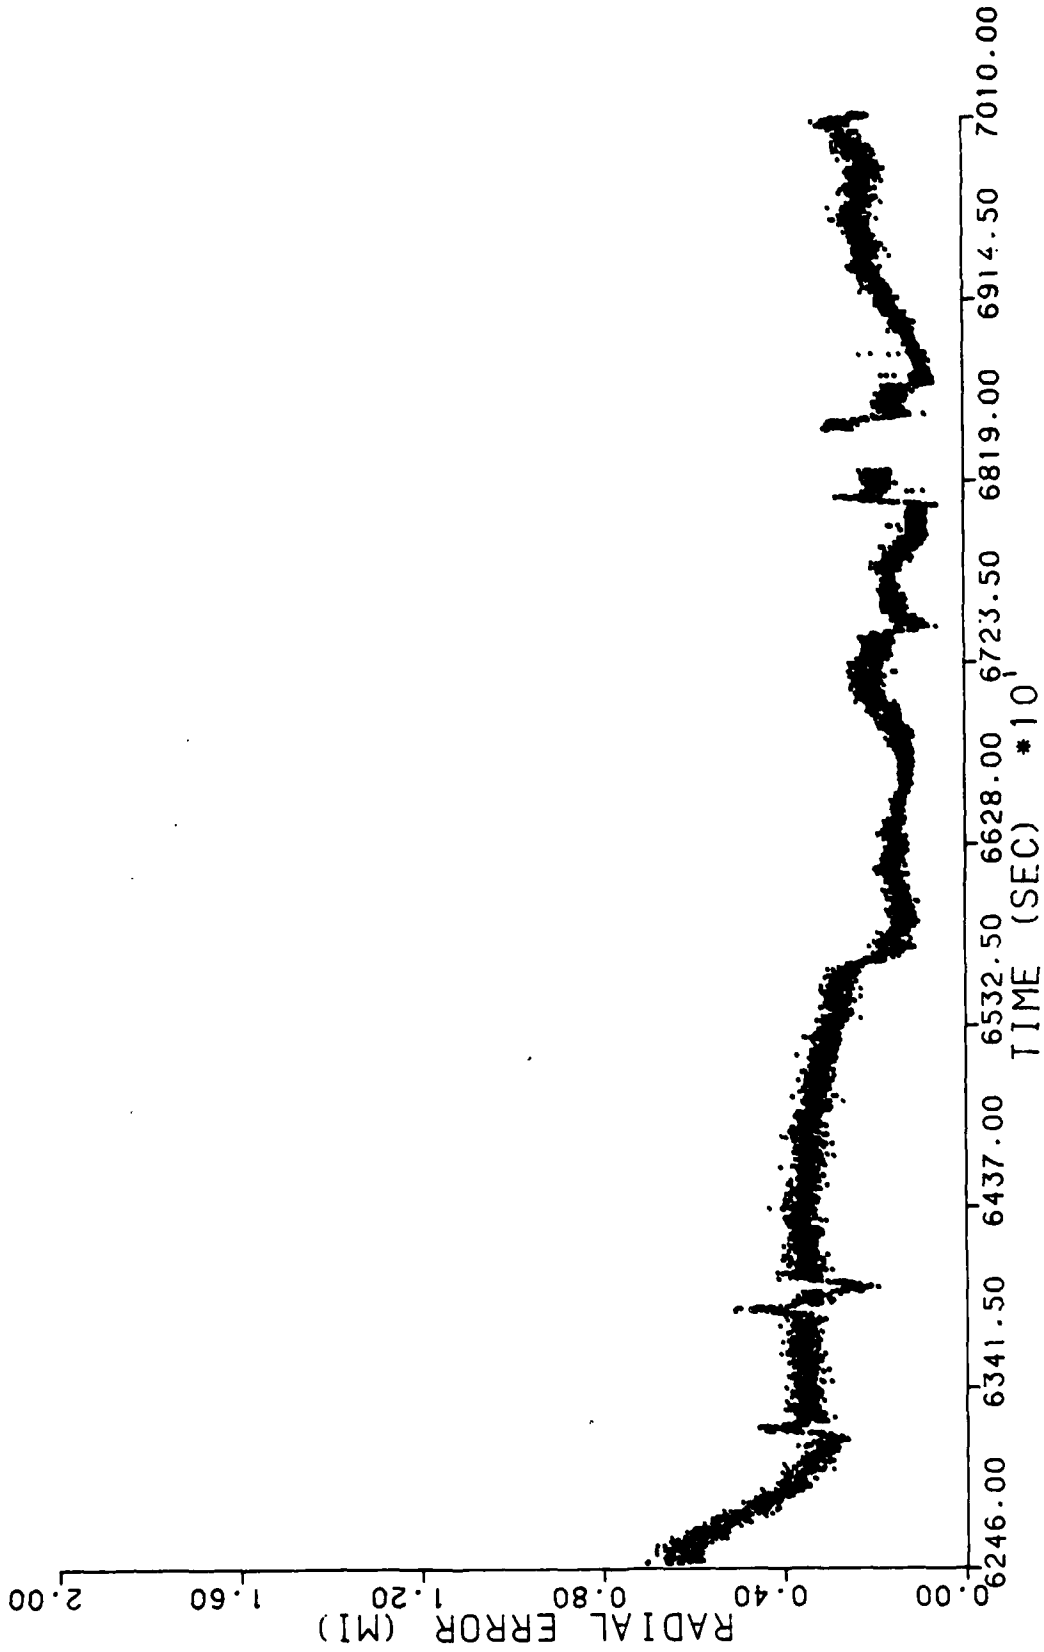


FIGURE 18. TDL-711 RADIAL ERROR - 9/20/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/21/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT, NJ 08403

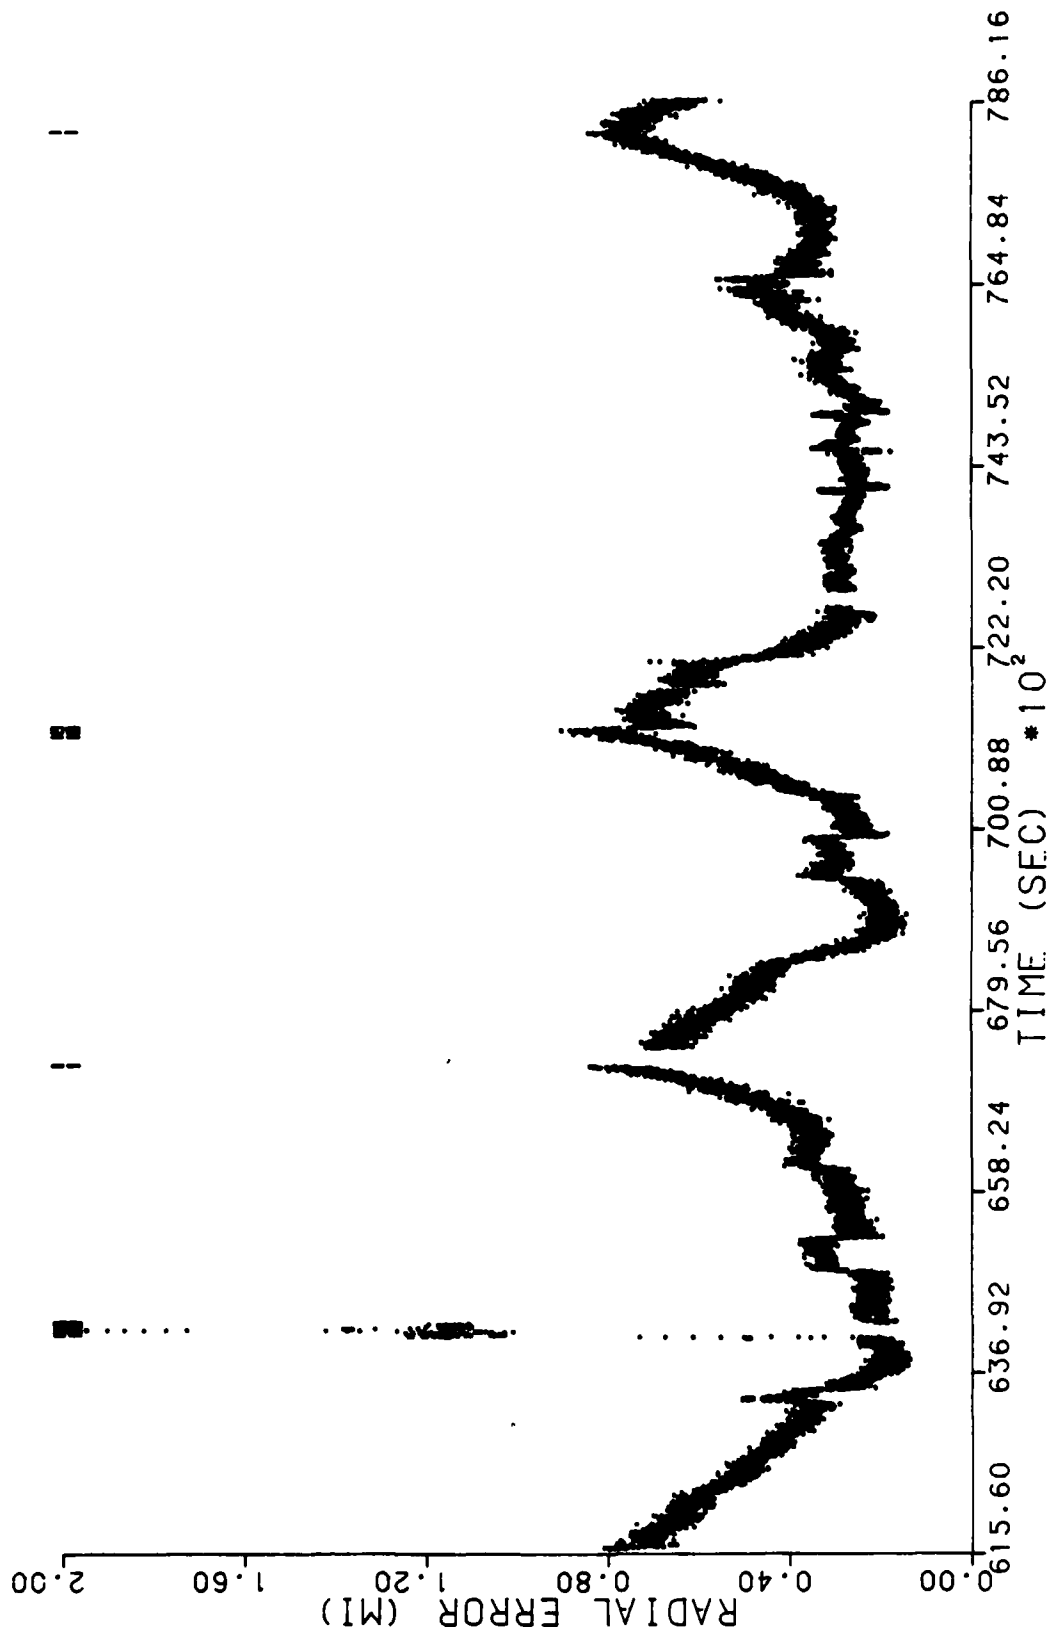


FIGURE 19. TDL-711 RADIAL ERROR - 9/21/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/22/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. N J 08405

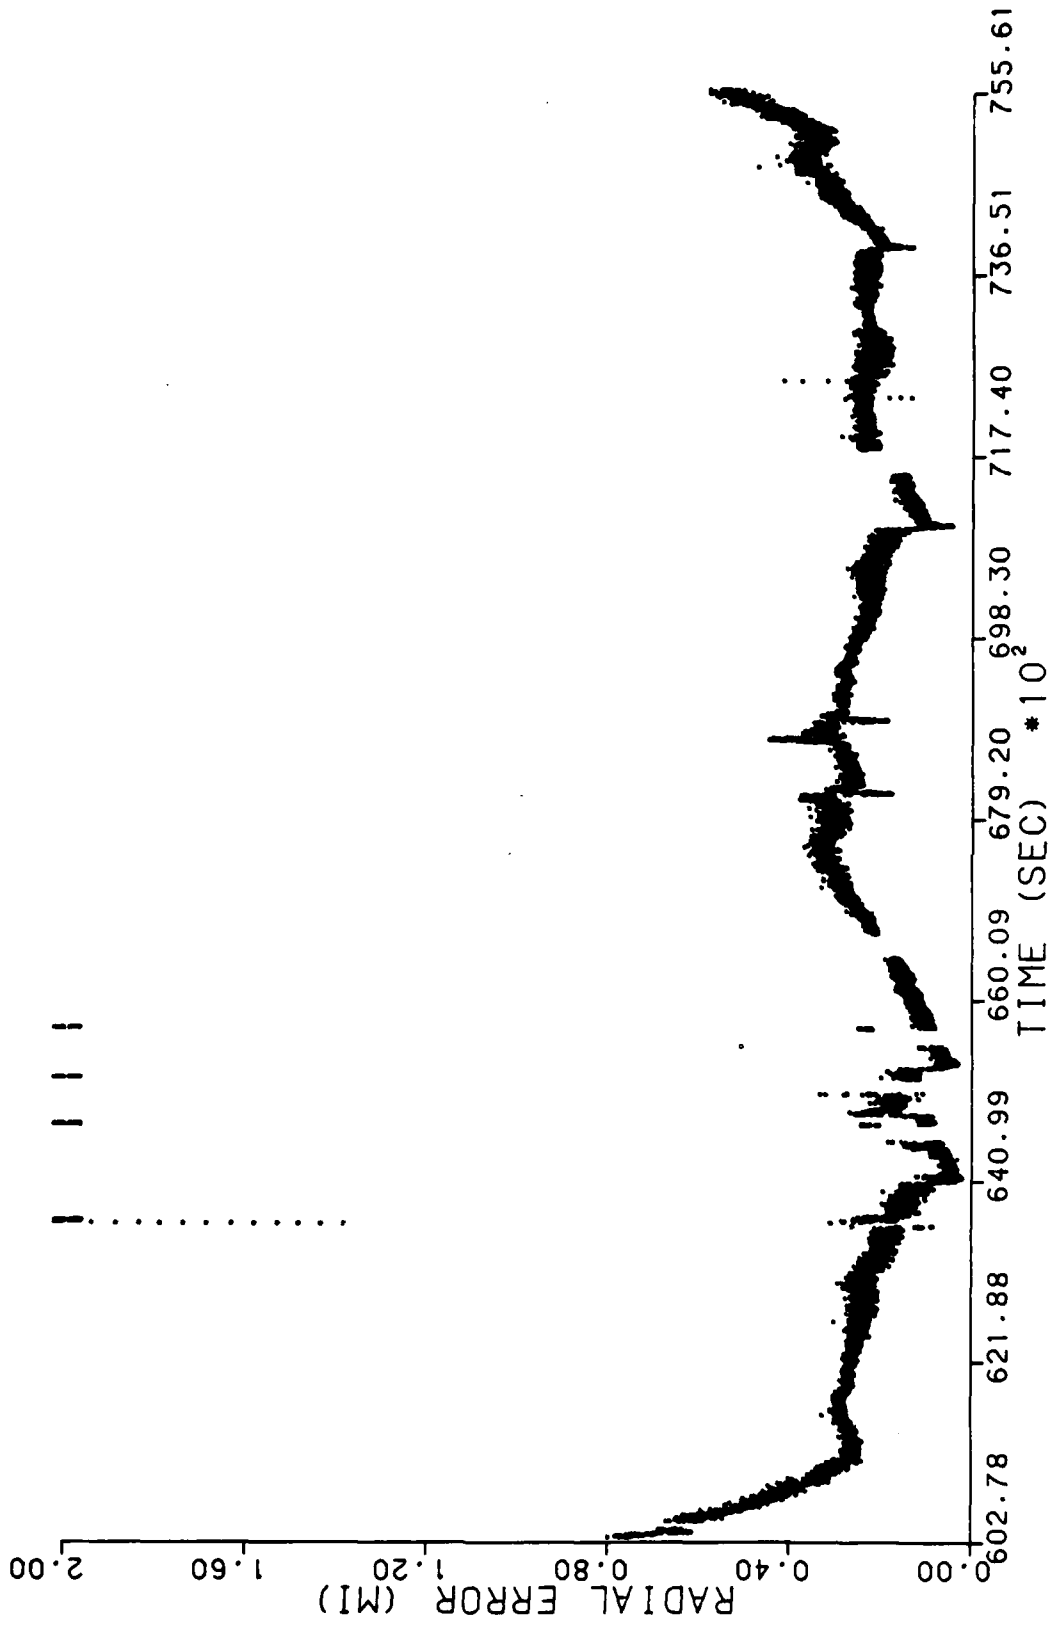


FIGURE 20. TDL-711 RADIAL ERROR - 9/22/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/23/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. N J 08405

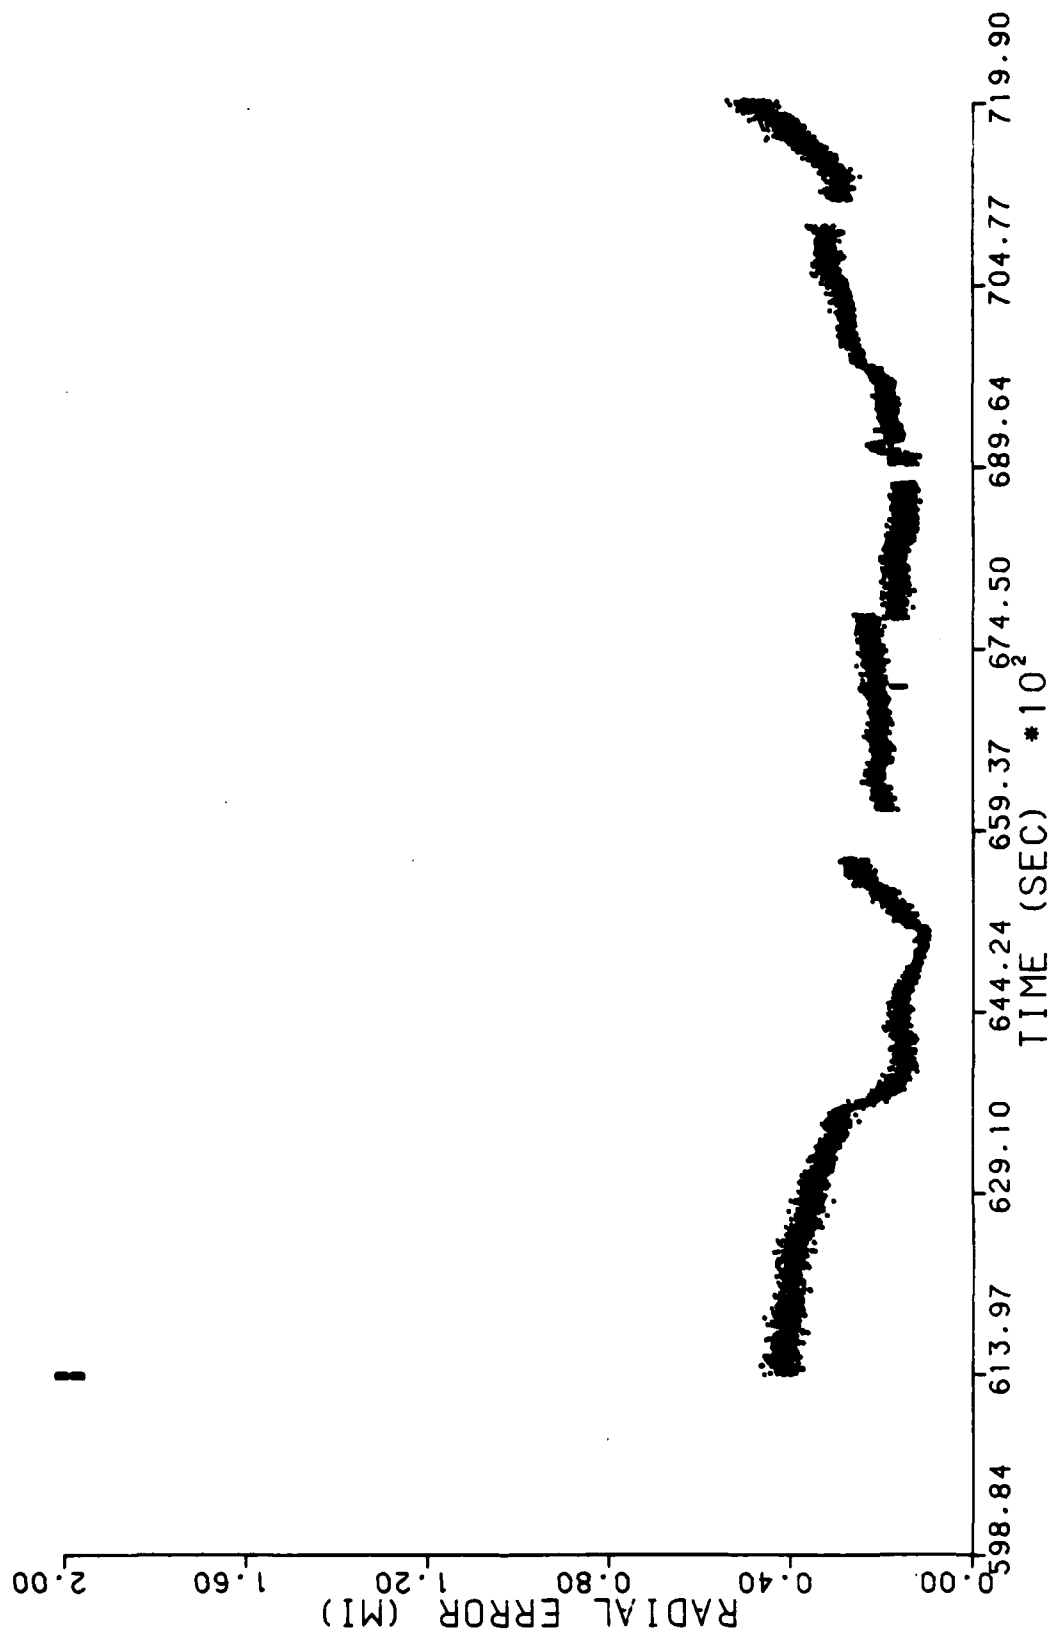


FIGURE 21. TDL-711 RADIAL ERROR - 9/23/87

TDL-711 RADIAL POSITION ERROR VS. TIME  
FLIGHT DATE: 09/24/87

DATA PROCESSED BY THE FAA TECHNICAL CENTER  
ATLANTIC CITY AIRPORT. H J 08405

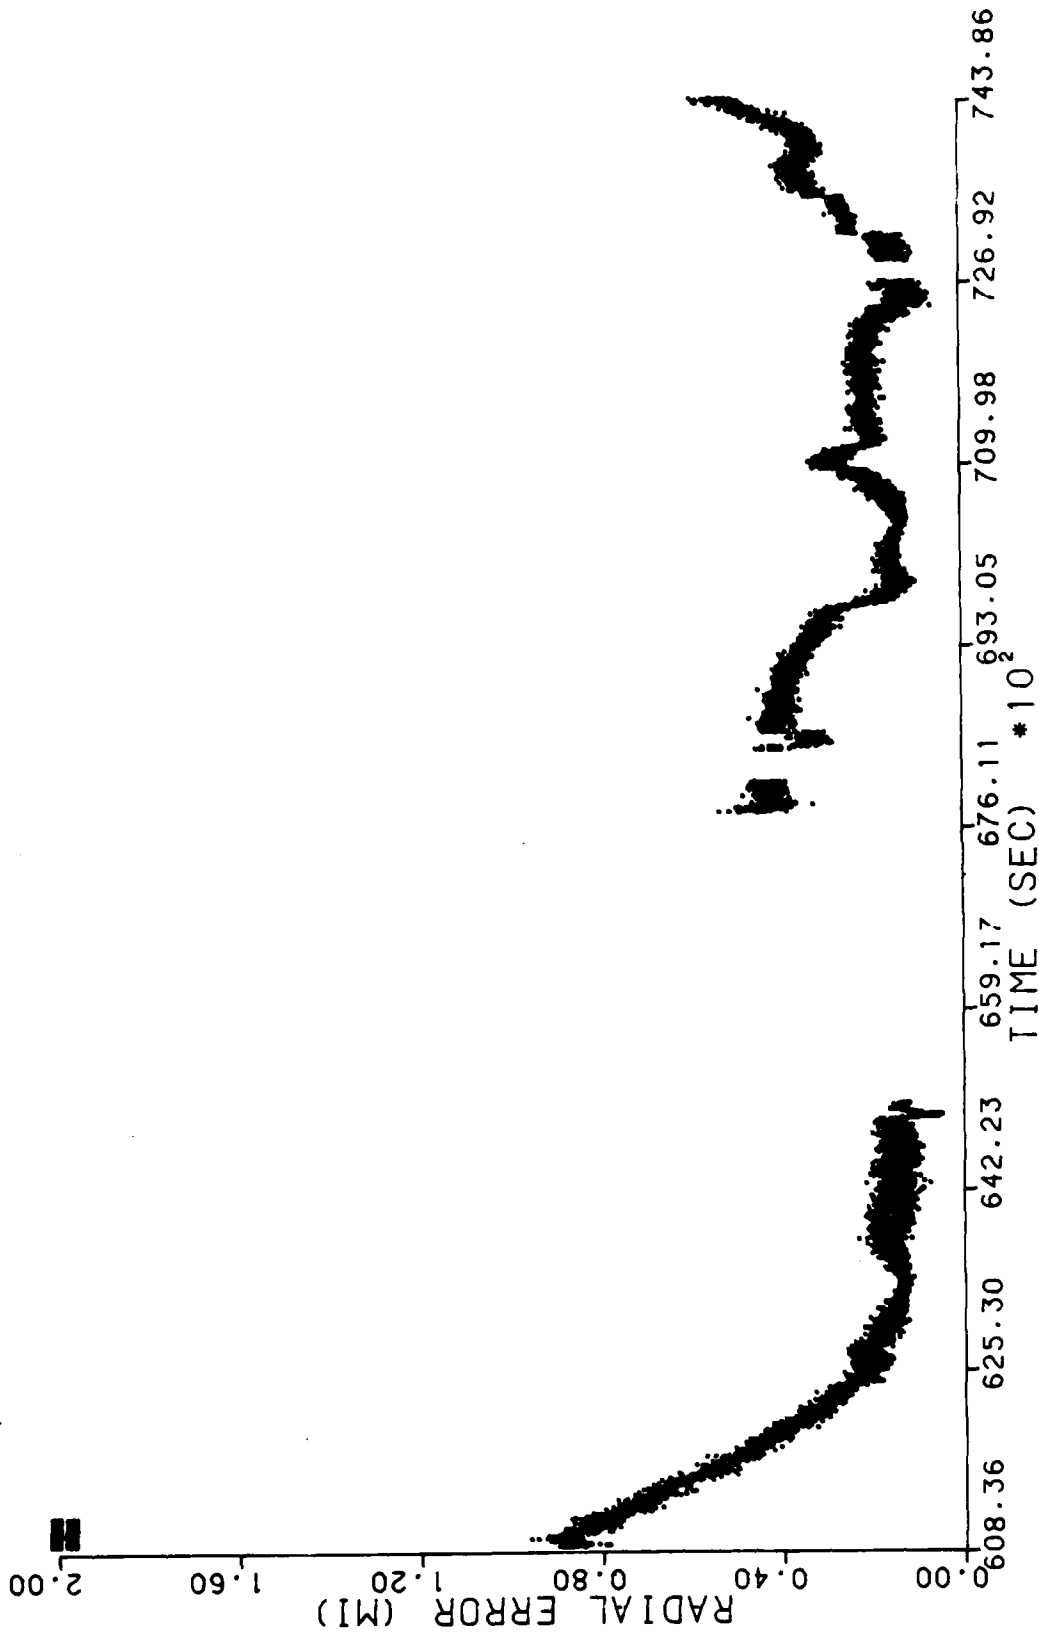


FIGURE 22. TDL-711 RADIAL ERROR - 9/24/87

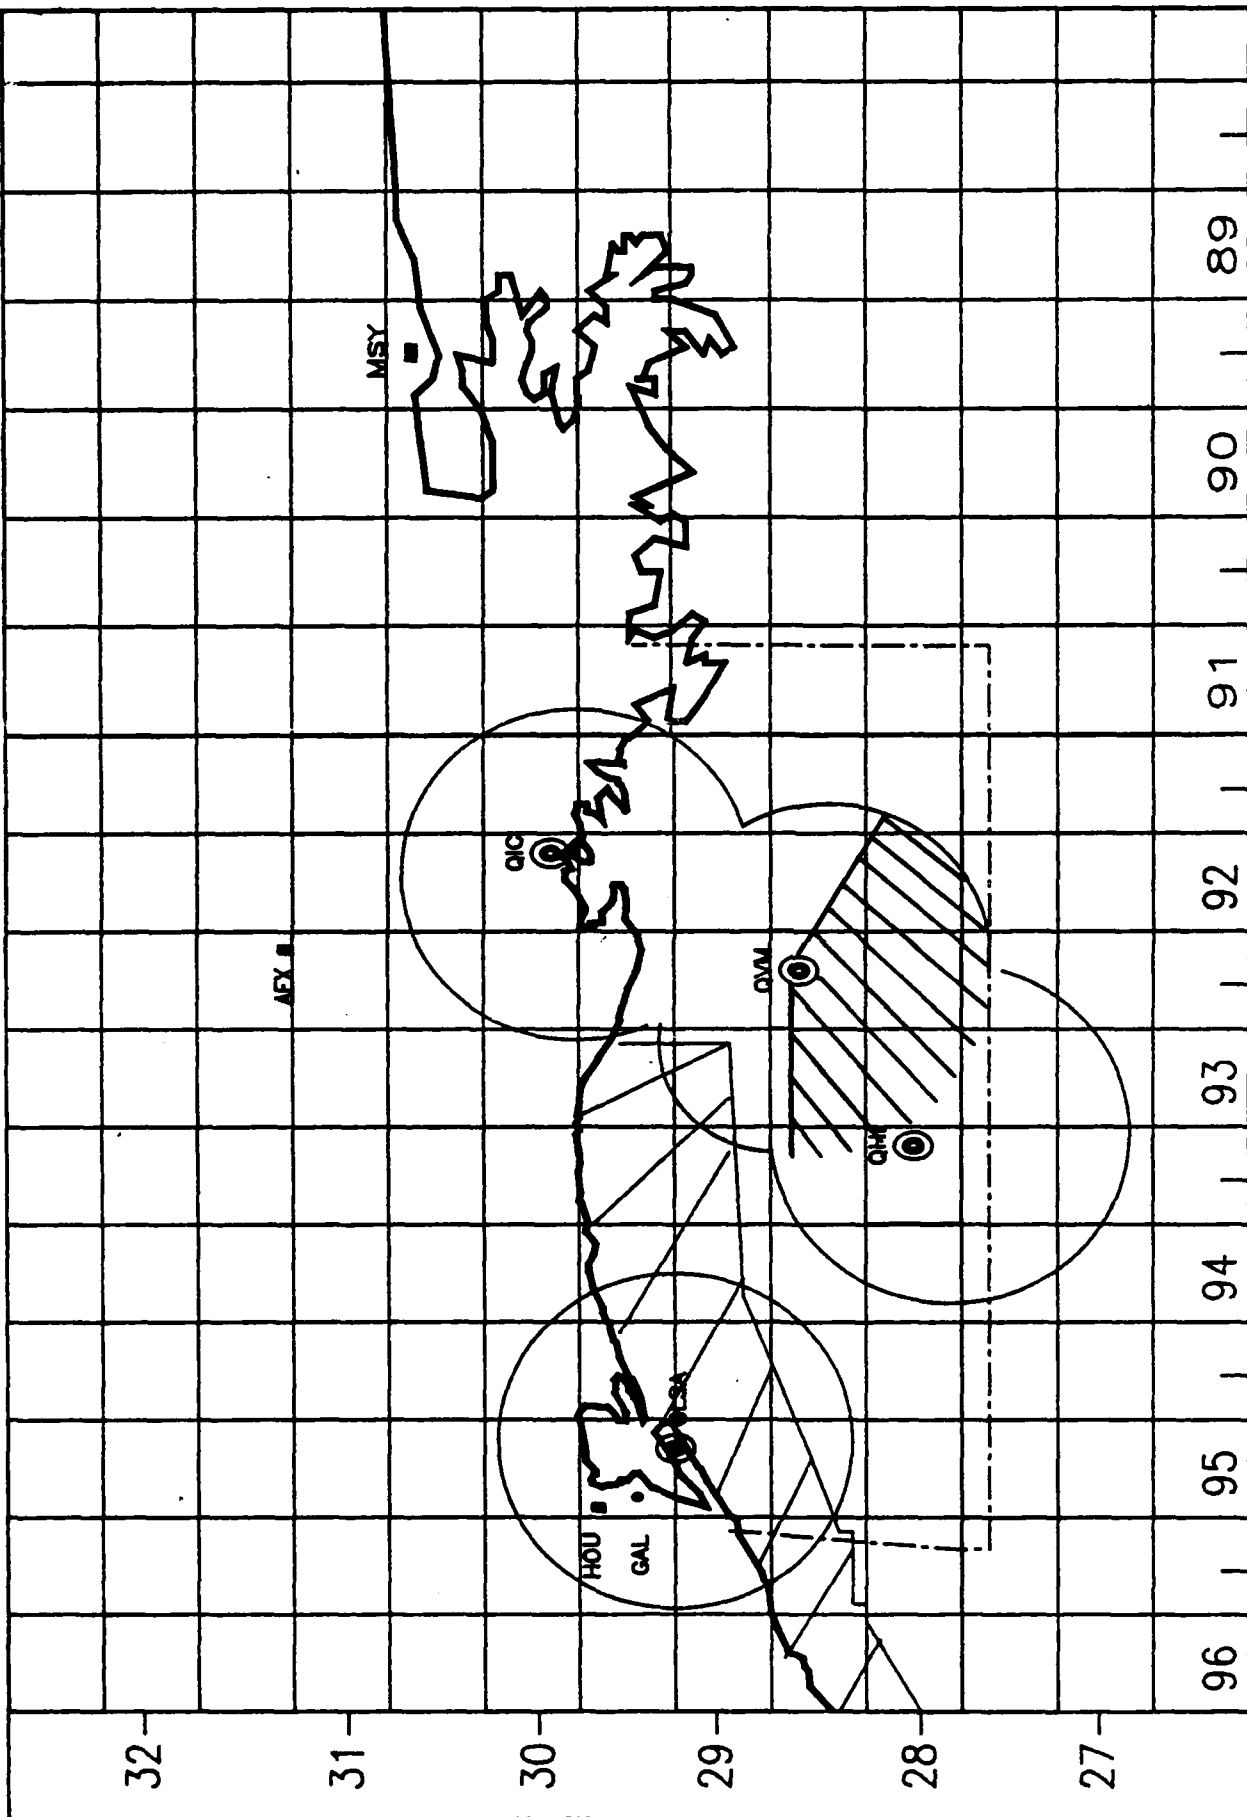


FIGURE 23. LOFF VHF COVERAGE - 1000 FEET ALTITUDE

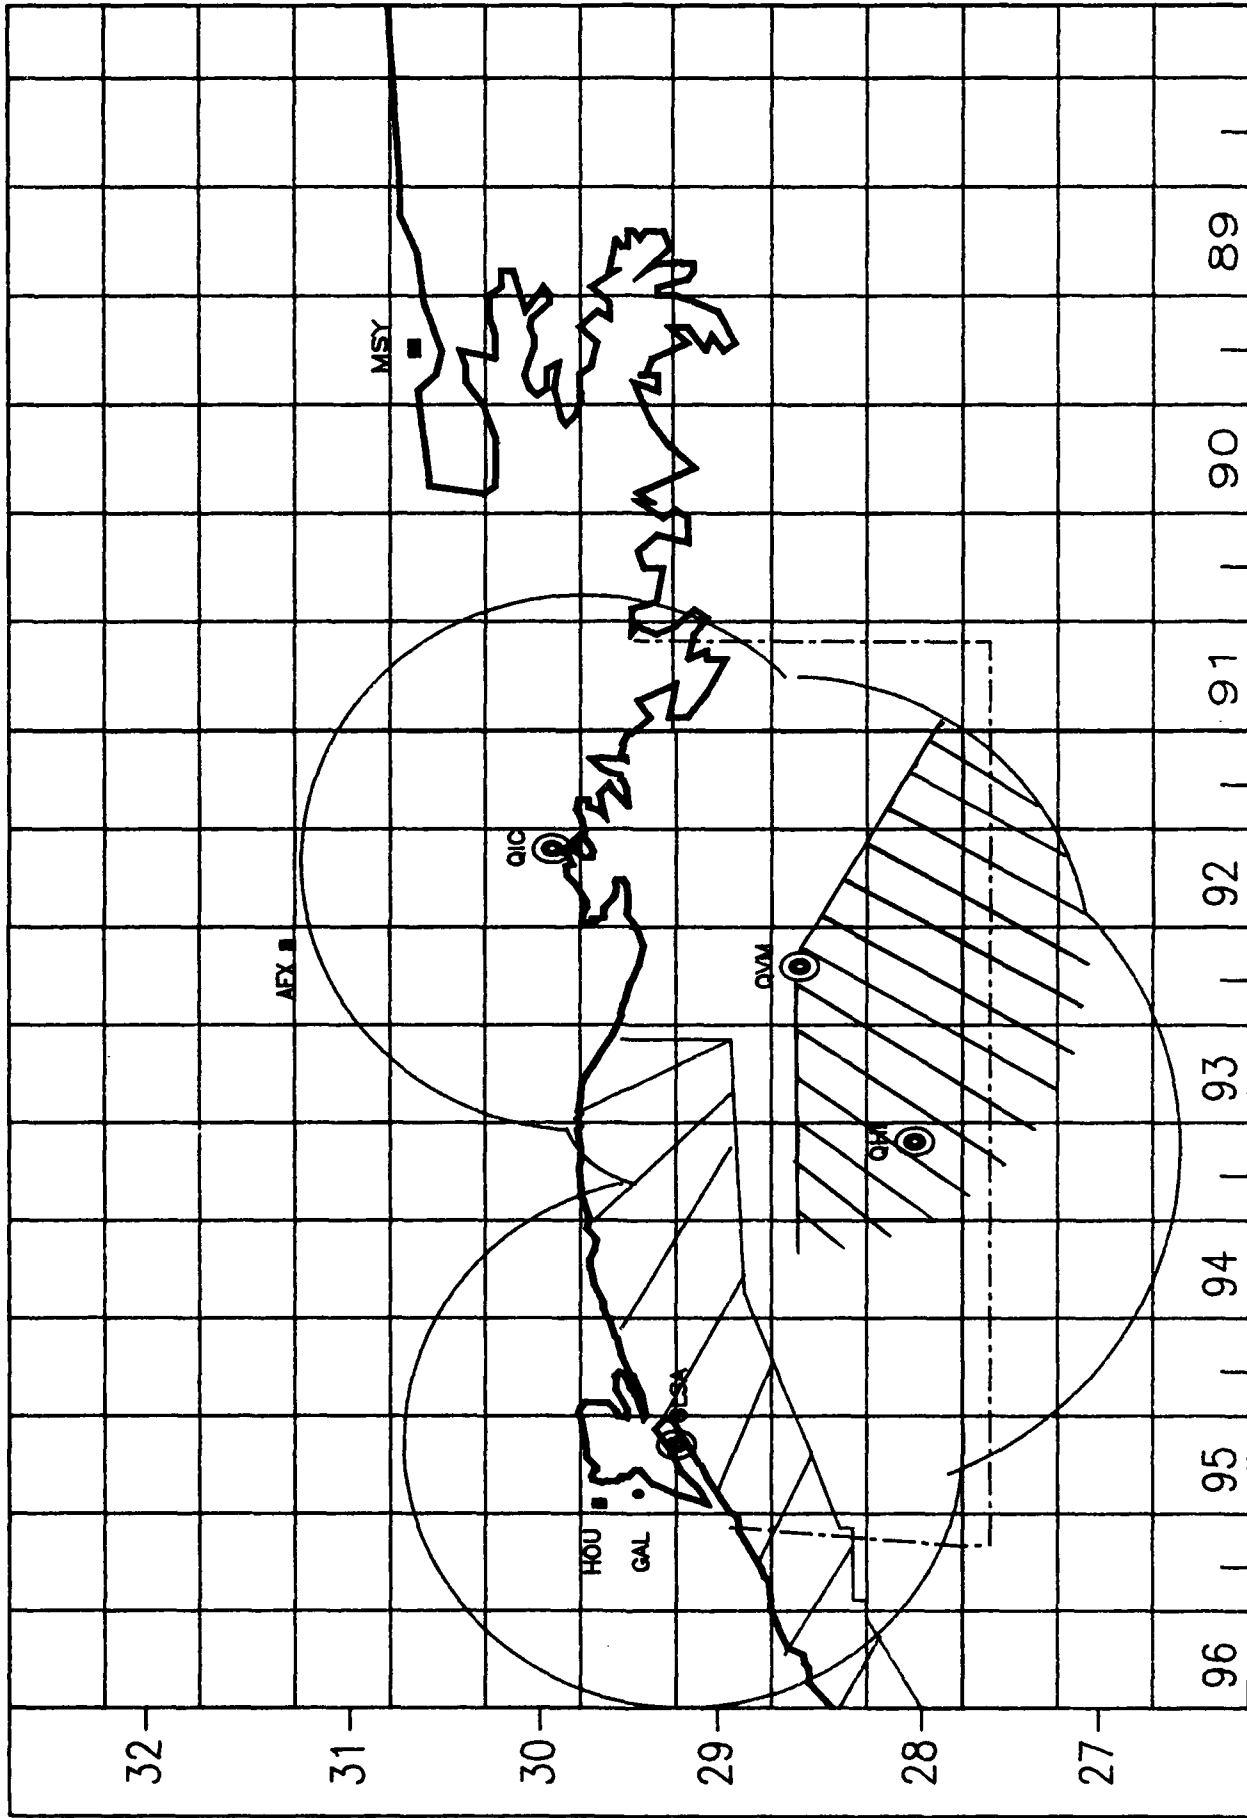


FIGURE 24. LOFF VHF COVERAGE - 3000 FEET ALTITUDE

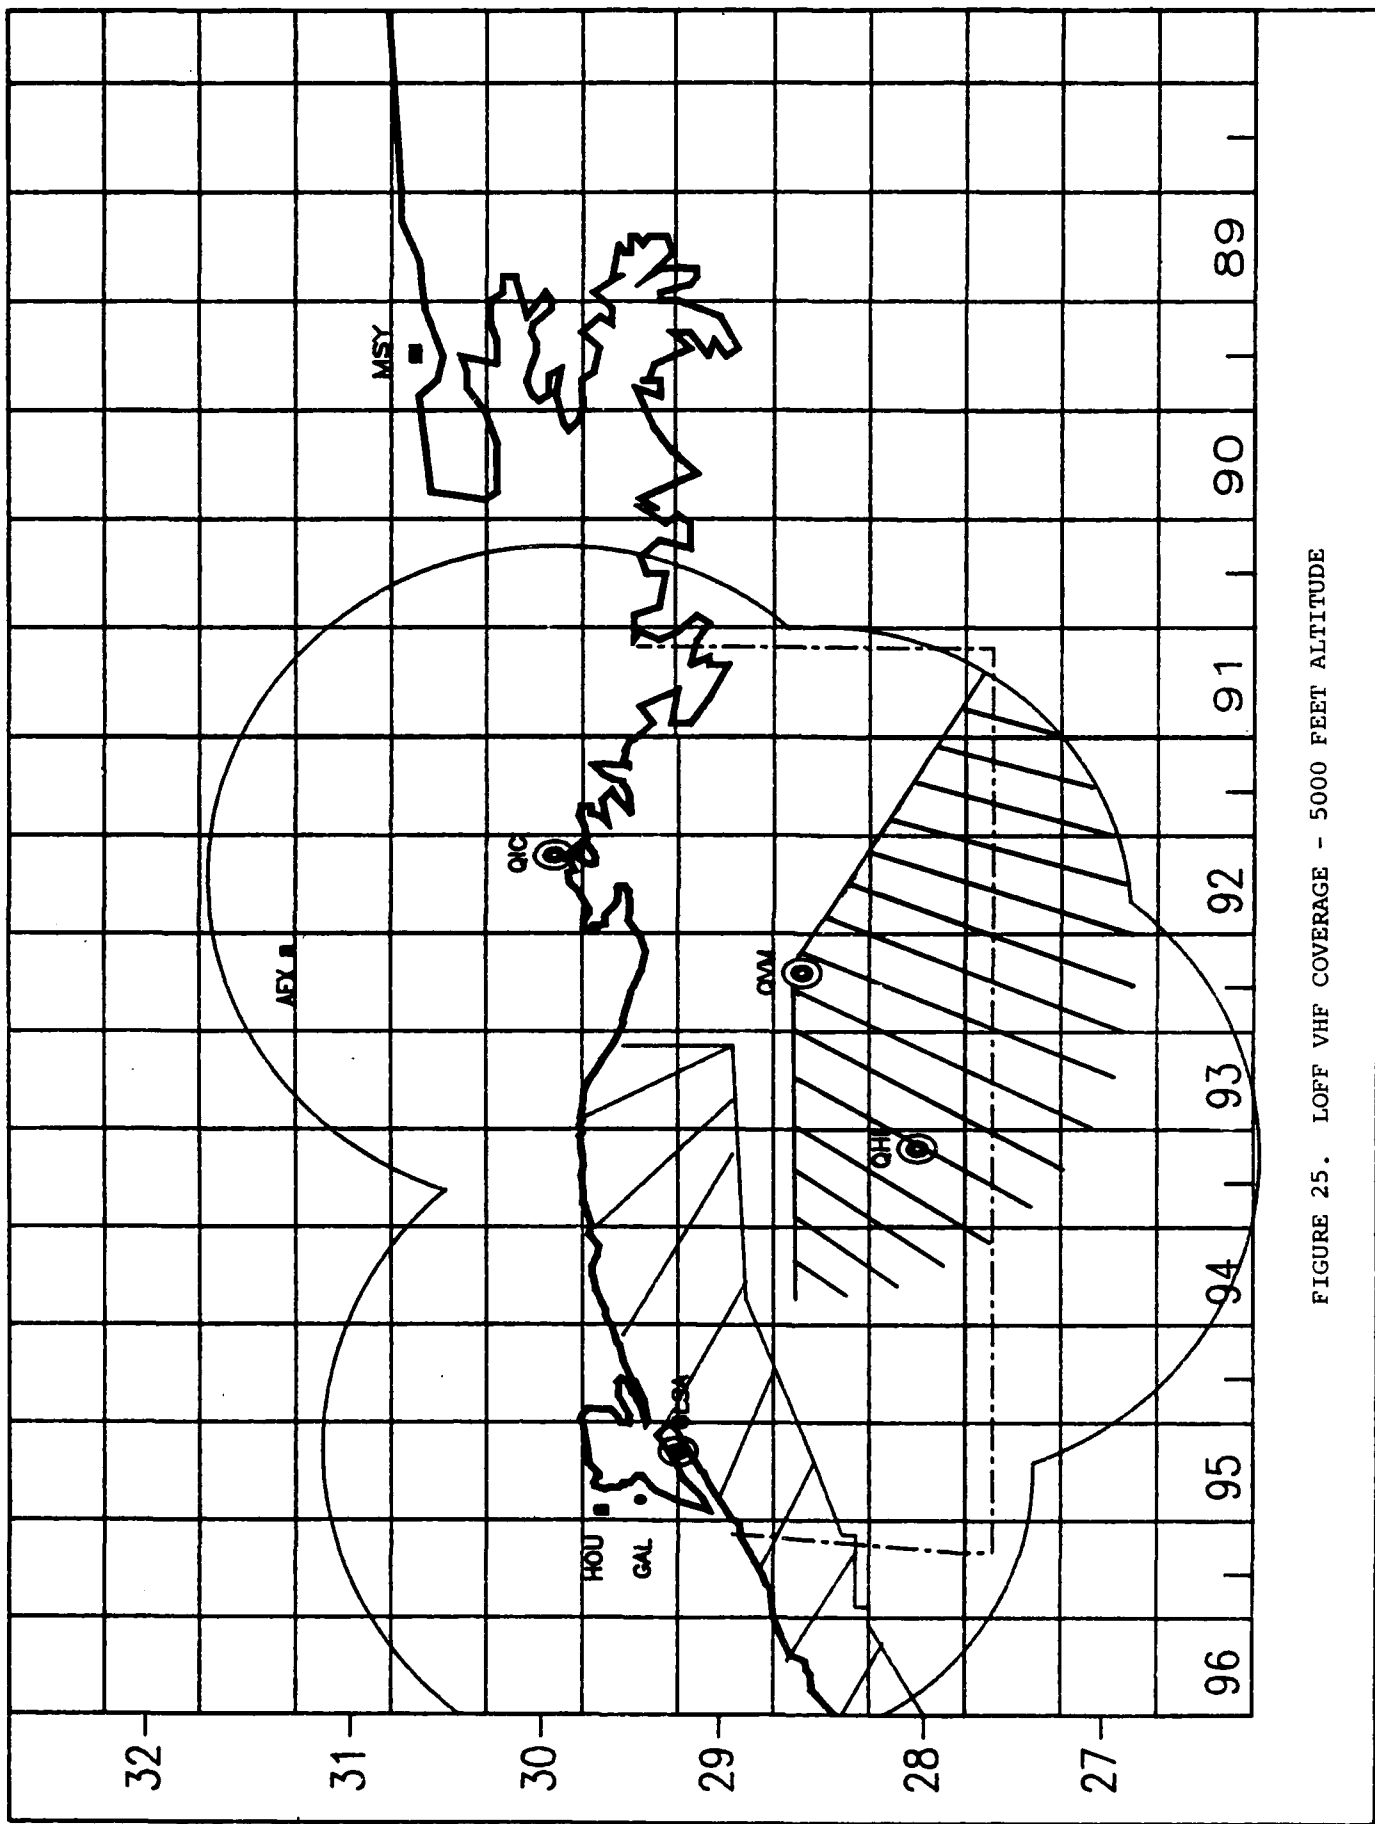


FIGURE 25. LOFF VHF COVERAGE - 5000 FEET ALTITUDE

TABLE 11. LOFF RADIAL COVERAGE IN NAUTICAL MILES

| <u>Site</u> | <u>Minimum Coverage</u> | <u>Maximum Coverage</u> | <u>Average</u> |
|-------------|-------------------------|-------------------------|----------------|
| GLSA        |                         |                         |                |
| 5000 feet   | 105                     | 112                     | 109            |
| 3000 feet   | 85                      | 98                      | 93             |
| 1000 feet   | 58                      | 62                      | 60             |
| QVM         |                         |                         |                |
| 5000 feet   | 110                     | 118                     | 112            |
| 3000 feet   | 85                      | 87                      | 86             |
| 1000 feet   | 52                      | 62                      | 58             |
| QIC         |                         |                         |                |
| 5000 feet   | 99                      | 117                     | 105            |
| 3000 feet   | 76                      | 85                      | 81             |
| 1000 feet   | 50                      | 53                      | 52             |
| QHI         |                         |                         |                |
| 5000 feet   | 99                      | 100                     | 99             |
| 3000 feet   | 62                      | 98                      | 82             |
| 1000 feet   | 48                      | 60                      | 53             |

HIGH ALTITUDE PROBE.

The high altitude probe was flown to approximately 26° of lat at flight level 200. The aircraft remained in coverage of the QHI site for the entire time, well beyond the coverage limits of long range radars.

TIME DELAYS.

Time delays as measured by the Infotec converter are shown statistically in table 12. Delays averaged 0.11 seconds. No delays greater than 1 second were observed.

TABLE 12. INFOTEC CONVERTER TIMING DELAYS

| <u>Delay Mean</u> | <u>Delay Standard Deviation</u> | <u>Total Samples</u> |
|-------------------|---------------------------------|----------------------|
| 0.11 seconds      | 0.15 seconds                    | 91204                |

Data link delays are on the order of 0.002 seconds. Delays resulting from the avionics were not measured for this test, but have been estimated by the manufacturer to be less than 0.33 seconds. Total delays through the system is, therefore, expected to be less than 0.5 seconds. A 1-second error corresponds to roughly a 400-foot (1/16 nmi) shift in position at 250 knots, ignoring tracker effects. A position shift of this magnitude is virtually undetectable on a PVD. However, the effect of the tracker may be significantly greater. A radar message contains timing information used by the system to determine time of applicability of the radar return. Since this information is not sent from the converter, performance of the tracker and display position projection algorithms will suffer.

#### OPERATIONAL EVALUATION.

Several issues not related to technical performance of the LOFF system became apparent during testing. These must be addressed in order to make LOFF a system which can be used to provide separation assurance.

The area of greatest concern is the data link. The VHF communications network currently in place will meet the initial requirements of the system. However, there are shortcomings to the use of a single frequency for both communications and data. Any use of the frequency while a LOFF databurst is in progress will corrupt the data being transmitted. Since there is no way for the AIC automation system to request a repeated data burst, no position data will be available from that aircraft until the next report. During the flight test this aspect of system performance was explored by keying an aircraft transmitter while the data burst was in progress. The result was that the data were completely lost for that transmission. Repeating this action for three consecutive position reports caused EDARC to lose the track and place the target on the PVD in coast mode. It is expected that this effect can also be caused by simultaneous transmission of LOFF data bursts by different aircraft. The likelihood of this occurring increases as the number of aircraft in the system increases. The problem is compounded by the fact that the VHF sites share frequencies. This is convenient for communications but increases the probability of data collisions.

Another result of the use of a single channel for voice and data is that each data burst is heard by all pilots and controllers tuned to that frequency. The result is annoying and distracting to those trying to use the frequency. It also leads to garbled voice transmission and the need to repeat voice reports and instructions.

The issues associated with certification of the airborne equipment have not yet been addressed. This must be done before LOFF may be used in an IFR environment. It was noticed during the flight test that turning the airborne LOFF interface on without valid Loran position available will cause the unit to transmit invalid position reports. The ground equipment has no means of determining that these messages are invalid.

Another certification issue involves placement of the antenna on an aircraft. During testing it was noted that data bursts would occasionally be received beyond the point of lost LOFF contact when the aircraft was in a turn. The antenna location used for this test was on top of the aircraft, behind the wing. It is expected that this location is the worst case, and performance may improve for aircraft with a bottom mounted antenna for LOFF use.

The airborne equipment as currently designed allows selection of LOFF codes which correspond to invalid beacon codes. The unit is capable of transmitting decimal digits, if desired by the pilot. These are used by private operators who have their own ground equipment. However, codes containing digits with values of 8 or 9 will not be recognized by NAS equipment, which uses only octal codes. Invalid codes will not be processed or displayed by the system. Also, the LOFF equipment in the airplane has only three digits available for a LOFF code while the ground equipment (EDARC) requires four digits in order to start a track. The solution implemented was for the converter to add a digit to the LOFF code and make it look like a conventional radar code to EDARC. This results in a discrepancy between the code input by the pilot and that displayed to the controller, which could lead to confusion.

Another issue to be addressed is the difference in the update interval code between newer and older LOFF interface units. The older units used a code of "1" to indicate that they were transmitting at a 15-second update rate. Newer units use this code to indicate a 7.5 second update rate. Since this code is transmitted as part of the LOFF message, the ground equipment checks the code and accepts only a "1." In order to operate within the system, a user with the latest model LOFF interface must set his update rate to 7.5 seconds. This results in alternate messages being discarded by the ground equipment and needless frequency congestion.

Although the system resembles radar in its appearance on the display, there are several important differences. The system as implemented does not include an identification (IDENT) function, which is available in the radar environment. This function is used to uniquely identify aircraft in the ATC system, especially as they enter the system. The nature of offshore operations involves a large amount of traffic which will climb into LOFF airspace from an oil rig or remote location. The system must have a means of identifying these aircraft.

Because of the differences between performance of LOFF and radar, the type of system in use should be somehow identified to the controller. The usual method in this type situation is to change the symbology of the target on the controllers display.

During simulation testing it was noticed that the tracker may cause the system to correlate the target's next position report over another stationary target. After both targets have been entered into the system as tracks, however, the system will correctly identify the targets and attach each to the appropriate track. Once the entire grid of simulated targets was entered into the system as tracked targets, it was very rare for the system to misidentify a track.

#### CONCLUSIONS

1. Conversion accuracy of the installed equipment does not meet the specified radar accuracy of 2 ACP's and 1/8 nautical miles (nmi) in all areas. However, the system performs consistently in a given local area. That is, aircraft near each other will be displayed at the proper separation. Local conversion effects are similar and should have little effect on aircraft separation. Stated differently, relative accuracy of the conversion is very good, although absolute

accuracy, as compared to existing radars, is much poorer. The effect of these errors is small relative to current radar separation standards.

2. End to end static and conversion accuracy data have been presented. They show that process results are very repeatable and regularly spaced for static targets. Tracker effects cause the displayed position to differ from the static position by 1.1 miles mean root sum of squares (rss).

LOFF target positions as computed by the Enhanced Direct Access Radar Channel (EDARC) show little or no variation in displayed position with altitude. Two targets at the same latitude/longitude (lat/long) but different altitudes will be displayed at the same position.

3. Coverage of the system using existing very high frequency (VHF) facilities varies from approximately 55 nmi at an altitude of 1000 feet to about 110 nmi at 5000 feet. Coverage of the area currently identified for Loran Offshore Flight Following (LOFF) use is, therefore, nearly total at altitudes as low as 1000 feet. This provides sufficient coverage for en route use. Procedures must be developed for granting Instrument Flight Rules (IFR) approach and departure clearances for operations to and from oil rigs which will involve operations below the LOFF coverage floor.

4. In areas of common coverage of LOFF and radar, radar should be used for separation purposes. Performance of LOFF in these areas was within 0.5 nmi mean rss of the radar position. The system should, therefore, enable controllers to perform ATC target handoffs for aircraft entering or leaving the LOFF sector. Radar track targets and LOFF track targets for the same aircraft will be very close to each other on the controller's display. Subjective assessment by the controller participating in the tests was that the display of these two targets in close proximity will not create a problem.

5. Performance of both Loran receivers in the area meets the requirements for en route accuracy established by existing standards. Accuracy of the ONI-7000 was excellent throughout the LOFF area. The TDL-711 was less accurate, but still within acceptable limits.

Based on Loran accuracy data collected during the flight test the exclusion area, as defined in the certification for the TDL-711 receiver, should be eliminated or reduced in size. Data to support this effort are being made available to the holder of the Supplemental Type Certificate.

6. The subjective evaluation by controllers was that system operational performance was nearly indistinguishable from that of radar. Differences in radar vs LOFF position were judged to be small enough that the presence of two targets for a single aircraft would not pose a problem. Also, the system was judged to be sufficiently reliable and accurate to enable handoffs to be made to or accepted from adjacent radar sectors.

Pilot response was also favorable. The system provides a service benefit and workload increase is negligible. The only detrimental aspect was the existence of the data burst in the cockpit headsets.

The system adds a requirement for maintenance and increased operational responsibility for facilities personnel. It is believed that the procedures for

initialization and operation of the system, which have been developed as a result of the tests, will prove suitable.

Overall results of the LOFF test program are favorable. The system performs in a predictable and reasonable manner. Performance of the system is comparable to that of radar, although there is a slight difference in accuracy between the two. The system performs well in the oceanic sector of the Houston Air Route Traffic Control Center and is compatible with the operational environment of the center. Once suitable separation and certification criteria have been established the system should be certified and used to provide separation assurance in the offshore area of the Gulf of Mexico. There is no technical reason to delay the further development of Loran Offshore Flight Following for use as an air traffic control tool.

### RECOMMENDATIONS

In order to fully implement the Loran Offshore Flight Following (LOFF) system for control purposes several issues must be resolved. These are described briefly below.

1. Separation standards must be developed which take into consideration the special needs of offshore operators and the capabilities of the installed equipment.
2. Procedures must be developed for use by controllers and pilots to provide clearance and conduct approaches and departures from oil rigs below the LOFF coverage floor under Instrument Flight Rules (IFR) conditions.
3. Standards must be developed in order to provide for airborne equipment certification.
4. Further study should be made into improving the integrity of the data link. Improvements may include increasing the number of offshore very high frequency (VHF) frequencies available, or modifying the operation of the data link to reduce the amount of interference (i.e., voice or other aircraft data) on the channel. Possible solutions of this type include adding ground equipment to interrogate the avionics, or to synchronize the transmission of LOFF data messages. System modifications of this type should attempt to minimize the changes required for existing avionics.

