

Best Available Copy

AD-A201 115

TECHNICAL REPORT
NATICK/TR 88/204

AD

COOLING EFFECTIVENESS OF HYBRID MICROCLIMATE GARMENT

BY

BARRY S. DE CRISTOFANO

JOSEPH S. COHEN

BRUCE S. CADARETTE*

AND

KAREN L. SPECKMAN*

UNITED STATES ARMY RESEARCH INSTITUTE OF ENVIRONMENTAL
MEDICINE

NATICK, MASSACHUSETTS 01760-5007

FINAL REPORT APRIL 1988
FOR THE PERIOD JULY 1987 TO AUGUST 1987

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

UNITED STATES ARMY NATICK
RESEARCH, DEVELOPMENT AND ENGINEERING CENTER
NATICK, MASSACHUSETTS 01760-5000

INDIVIDUAL PROTECTION DIRECTORATE

Best Available Copy

DTIC
ELECTE
NOV 5 6 1988

AD-7001 115

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) NATICK/TR-88/003			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION U.S. Army Natick RD&E Center		6b. OFFICE SYMBOL (If applicable) STRNC-ICAS	7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State, and ZIP Code) Natick, MA 01760-5019			7b. ADDRESS (City, State, and ZIP Code)		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS		
PROGRAM ELEMENT NO. 63747		PROJECT NO. D669	TASK NO. 35	WORK UNIT ACCESSION NO.	
11. TITLE (Include Security Classification) Cooling Effectiveness of a Hybrid Microclimate Garment (U)					
12. PERSONAL AUTHOR(S) Barry S. DeCristofano, Joseph S. Cohen, Bruce S. Cadarette*, Karen L. Speckman*					
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM Jul 87 TO Aug 87	14. DATE OF REPORT (Year, Month, Day) 1988 April		15. PAGE COUNT 23
16. SUPPLEMENTARY NOTATION *U.S. Army Research Institute of Environmental Medicine					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	LIFE SUPPORT SYSTEMS, PORTABLE EQUIPMENT, HYBRID SYSTEM, PROTECTIVE CLOTHING, ARMY PERSONNEL, LIQUID COOLING, MICROCLIMATE COOLING, PROTOTYPES, CIRCULATION, (Cont)		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) A prototype microclimate cooling garment that would allow the wearer to connect to either an air or a liquid cooling unit was tested and compared with existing air and liquid vests. Five male soldiers wore the three garments (hybrid, air, and liquid) on different days while walking on a treadmill at $1.0 \text{ m} \cdot \text{sec}^{-1}$ ($2.2 \text{ mi} \cdot \text{hr}^{-1}$), 0% grade in a climatically controlled environment. The chamber conditions were: dry bulb temperature, 38°C (100°F); relative humidity, 20%. The exercise generated a 332-W ($1133 \text{ Btu} \cdot \text{hr}^{-1}$) metabolic rate. The average metabolic rate (including rest periods) was 287 W. ($980 \text{ Btu} \cdot \text{hr}^{-1}$). The hybrid garment, in either mode, performed as well as the individual air and liquid garments. Though the hybrid vest succeeded physiologically, comfort and fit problems were revealed that will require major changes in the next iteration.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT ☐ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Barry S. DeCristofano			22b. TELEPHONE (Include Area Code) (508) 651-5439		22c. OFFICE SYMBOL STRNC-ICAS

2
Box 18 (Cont)

AIR COOLED,

~~DISTRIBUTION~~

VESTS, (SOW)

PREFACE

This study was conducted to evaluate the performance of a prototype cooling garment that operated with either air or liquid as the cooling medium. The data gathered — cooling levels, physiological responses and human factors observations — have been analyzed and presented herein to provide guidance in the design of the next generation garment.

The research was conducted jointly by the U.S. Army Research Institute of Environmental Medicine (USARIEM) and the U.S. Army Natick RD&E Center (NRDEC), Program Element No. 63747.

The authors wish to acknowledge the high level of effort and cooperation displayed by the test subjects throughout the study.

Our thanks is also extended to Mr. Il Young Kim for his artistic contribution.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



TABLE OF CONTENTS

	page
PREFACE	iii
LIST OF FIGURES	vii
INTRODUCTION	1
TEST DESCRIPTION	2
RESULTS	8
DISCUSSION	9
REFERENCES	11

LIST OF FIGURES

	page
1. Hybrid microclimate cooling garment.	3
2. Air microclimate cooling garment.	4
3. Liquid microclimate cooling garment.	5
4. Liquid cooling garment flow pattern.	5

COOLING EFFECTIVENESS OF A HYBRID MICROCLIMATE GARMENT

INTRODUCTION

Microclimate cooling has been introduced to the field as standard equipment on the M1A1 Abrams tank. Other combat vehicle Program Managers are studying the use of microclimate systems, and the trend appears to favor the selection of air as the cooling medium. Certain scenarios require a mounted soldier to leave the vehicle for an extended period of time. It is desired to provide cooling to the soldier during this period. Existing technology indicates that the use of liquid cooling for dismounted operations is more viable than air cooling because, in general, the components are smaller, lighter, and require less power to deliver a comparable cooling rate. All of these factors affect portability of the proposed system. In an effort to ease the logistical burdens of fielding two different cooling garments, an attempt has been made to combine an air distribution system and a liquid circulation loop into one garment. The result is the hybrid microclimate cooling garment.

A study was conducted to determine the effectiveness of the new garment while operating as either an air distribution garment or a liquid circulation garment, with comparison to the existing air and liquid cooling vests. Data gathered will form the framework for generating the next design iteration.

The investigation was conducted by the U.S. Army Research Institute of Environmental Medicine (USARIEM) and Natick.

TEST DESCRIPTION

Subjects.

Five male soldiers served as test subjects. All volunteered and were allowed to terminate their participation at any time if they desired. Physical characteristics of the subjects were (mean +/- standard deviation): age, 24.4 +/- 5.3 years; height, 174.6 +/- 3.8 cm; mass, 65.9 +/- 12.1 kg; body surface area, 1.79 +/- 0.16 m². Testing was conducted in midsummer. The subjects were heat acclimated for five days prior to beginning the study.

Climatic Conditions.

The environment for each session was maintained at 38°C (100°F) dry bulb temperature and 11.5°C (53°F) dew point (20% relative humidity). The wind speed was 1.12 m·s⁻¹ (2.5 mi·hr⁻¹).

Metabolic Heat Load.

Each test consisted of three rest/work cycles (40 minutes and ten minutes, respectively). The subjects walked on a treadmill at 1.0 m·s⁻¹ (2.2 mi·hr⁻¹), 0% grade during their work periods. The average, measured metabolic rate during exercise was 332 W (1133 Btu·hr⁻¹). The overall metabolic rate (including rest) was 287 W (980 Btu·hr⁻¹).

Clothing and Equipment.

The test subjects wore (in order, from the skin outward) a T-shirt, cooling vest, combat vehicle crewman (CVC) fragmentation protective vest, CVC Nomex coveralls, chemical/biological (CB) overgarment (pants and jacket), M-17 gas mask, butyl rubber hood, CB butyl rubber gloves with

cotton liners, and CB butyl rubber overboots. The filter elements were removed from the masks to facilitate breathing.

Cooling Garments.

The hybrid microclimate cooling garment (Fig. 1) consisted of two parallel circuits, one for air and the other for liquid. Two layers of polyurethane-coated nylon, heat-sealed into panels, formed a continuous channel through which a chilled liquid was circulated. The coolant flowed in series from the front-right torso region, to the back, to the front-left torso, and then doubled back along the opposite route. The concept behind this layout was to eliminate a "cold" region at the vest inlet and a "hot" region at the vest outlet. Turning the flow channel back along a parallel route was to provide an averaged coolant temperature to the skin. Air cooling was introduced by the incorporation of perforated tubes between the straight portions of the liquid channel. Two tubes were located over the wearer's chest and three over the back.



Figure 1. Hybrid microclimate cooling garment.

The air garment used was the Vest, Microclimate Cooling: Air, MSN 8415-01-217-5634 (Fig. 2). The vest consisted of a manifold assembly which split the air entering the vest and distributed it over the chest, neck, and back. The manifolds and hoses were kept in place by attachment to an open-weave, Nomex carrier. Effectiveness of the vest had been documented in earlier studies (1,2). Air was supplied to both the air vest and hybrid-air vest at $4.8 \pm 0.4 \text{ L}\cdot\text{s}^{-1}$ ($10.1 \pm 0.8 \text{ ft}^3\cdot\text{min}^{-1}$). The air was at a dry bulb temperature of $28.3 \pm 1.4 \text{ }^\circ\text{C}$ ($82.9 \pm 2.5 \text{ }^\circ\text{F}$) and had a dew point of $15.6 \text{ }^\circ\text{C}$ ($60.1 \text{ }^\circ\text{F}$) (45% relative humidity).

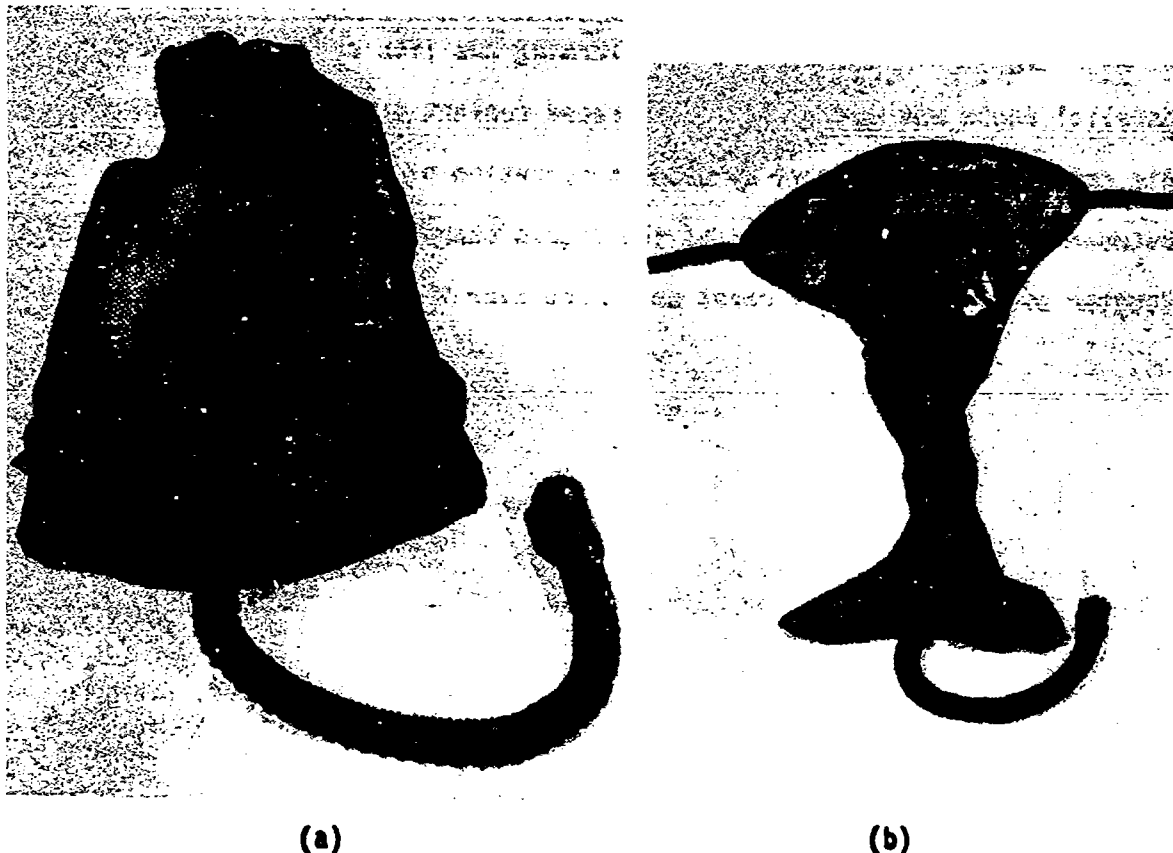


Figure 2. Air microclimate cooling vest.

(a) folded view; (b) unfolded view.

The liquid cooling garment (Fig. 3) was constructed of polyurethane-coated nylon, but used a diffused, less well-defined flow pattern than the hybrid garment (Fig. 4). Chilled liquid entered at the back of the collar and flowed in parallel to each side of the chest, over the shoulders to the lower back and then up the back to an exit port located just below the collar.

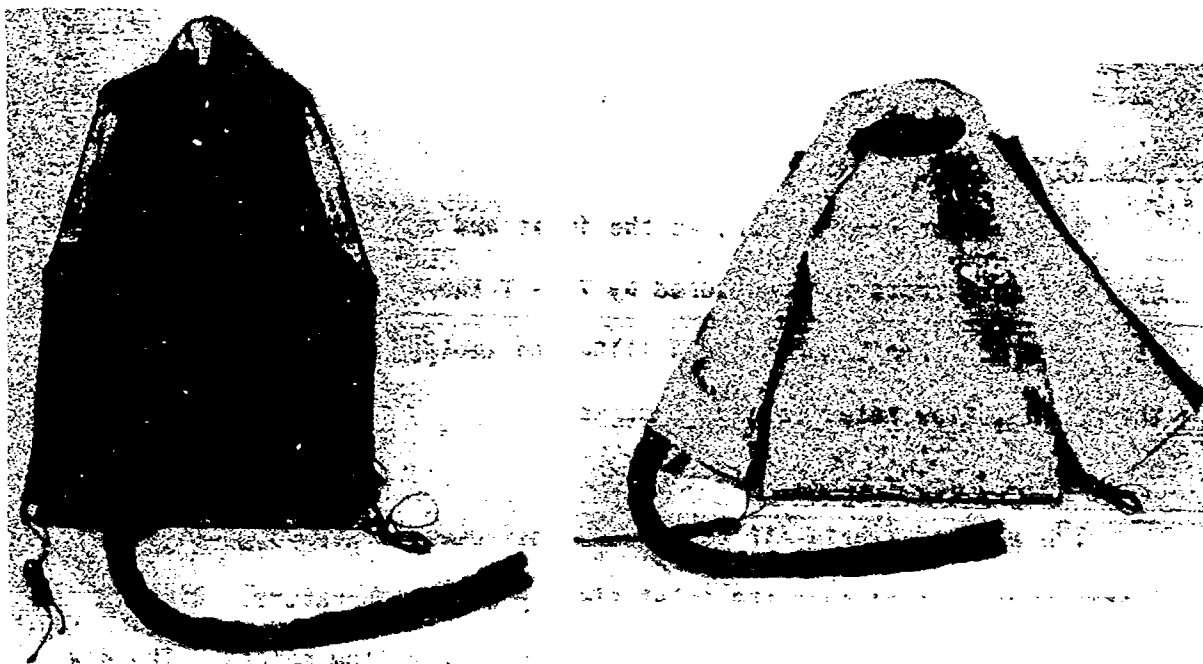


Figure 3. Liquid microclimate cooling garment.

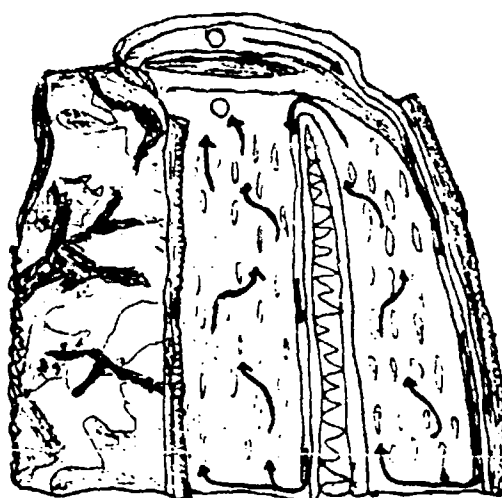


Figure 4. Liquid cooling garment flow pattern.

Cooling studies using this vest had also been conducted prior to its selection for the test (3). A 10% percent propylene glycol and water solution was circulated at a rate of $6.3 \times 10^{-3} \text{ L}\cdot\text{s}^{-1}$ ($50 \text{ lb}\cdot\text{hr}^{-1}$). The temperature of the coolant entering the vests was $25.0 \pm 0.8 \text{ }^{\circ}\text{C}$ ($77.0 \pm 1.4 \text{ }^{\circ}\text{F}$). The coolant flow rate and inlet temperature were the same for both the liquid and hybrid-liquid garments.

Data Collection.

The coolant temperatures at the inlet and outlet of the liquid and hybrid-liquid vests were measured by Type T thermocouples placed in the flow streams. Two Brooks Type 6-1110-6 rotameters were used to monitor the coolant flow rates to the garments.

The air and hybrid-air vests were instrumented with Type T thermocouples to measure the inlet air dry bulb temperature. Airflow rates were determined using Datametrics Type 1202 flow meters. The dew point temperature of the air was set by controlling the temperature of the saturated air leaving the air supply/conditioning unit.

All thermocouples and air flow meters were connected to a Hewlett-Packard Model 3497A scanner. The voltages were fed to a Hewlett-Packard Model 9836 CPU for conversion to temperature and flow rate values and storage onto a floppy disk. Output from the CPU was to a plotter and printer (Hewlett-Packard Models 7470A and 2631A, respectively) to provide real-time monitoring of the systems.

The rate of heat absorbed ($\dot{Q}$) by either of the liquid cooled garments was calculated by multiplying the coolant flow rate ($\dot{m}$) by the heat capacity of the coolant (C_p) and the temperature difference between the inlet and outlet of the vest (ΔT) (Eq. 1).

$$\dot{Q} = \dot{m} \times C_p \times \Delta T \quad (1)$$

$$C_p = 0.96 \text{ cal} \cdot \text{g}^{-1} \cdot ^\circ\text{C}^{-1} \text{ (0.96 Btu} \cdot \text{lb}^{-1} \cdot ^\circ\text{F}^{-1}\text{)}$$

A method of assessing the dry bulb temperature and saturation level of the exit air which was both reliable and unobtrusive could not be arranged. Therefore, no direct measurement of the cooling rate achieved by the air garments was obtained. After calculation of the liquid cooling rates, the data was subjected to an analysis of variance (ANOVA) and Duncan's multiple range test to determine any significant differences between the systems.

Physiological measurements were made by USARIEM. The test was terminated after 150 minutes or if a subject's core temperature reached 39.5°C (103.1°F) or if his heart rate exceeded 180 beats per minute for more than five minutes during or immediately following exercise.

RESULTS

Cooling Performance.

There was no significant difference between the levels of heat removed by the liquid and hybrid-liquid garments. The measured values were 92.7 ± 10.2 W (316.5 ± 34.8 Btu·hr⁻¹) and 84.9 ± 12.3 W (289.8 ± 42.0 Btu·hr⁻¹), respectively.

As explained in the previous section, no direct measurement of the heat removed by the air garments was possible.

Physiology.

Comparing the liquid and hybrid-liquid garments, no significant differences were found between final core temperatures, T_{re} , 37.7 °C (99.9 °F); change in core temperature, T_{re} , 0.77 °C (1.4 °F); final heart rate, HR, 140 b·min⁻¹; or whole body sweat rate, SR, 14.3 g·min⁻¹ (the reported means are for the combined data sets).

Likewise, no significant differences were found for these parameters when the air and hybrid-air garments were compared: T_{re} , 37.6 °C (99.7°F); T_{re} , 0.48 °C (0.86 °F); HR, 130 b·min⁻¹; and SR, 12.6 g·min⁻¹ (again, the reported means are for the combined data sets). Further analysis of the measured physiological parameters may be found in ref. 4.

Subjective evaluations by the subjects yielded a mean value of 12.2 (light) for their perceived level of exertion during the exercise sessions (7 = very, very easy; 19 = very, very hard) and a thermal sensation of 5.2 (warm; 0.0 = unbearably cold; 8.0 = unbearably hot). All subjects in all tests were able to complete the 150 minute work/rest regime.

Human Factors.

The following shortcomings in the hybrid vest were noted during the study:

- (1) the liquid umbilical was too short -- it was barely able to protrude through the outer layers of clothing,
- (2) the air umbilical got in the way when not being used,
- (3) the garment did not fit well at the lower back due to its stiffness -- proper contact in the liquid mode is important,
- (4) the garment was too long -- it chafed the front of the thighs on the smaller subjects,
- (5) the collar was too high in the back of the neck.

DISCUSSION

The study showed the general feasibility of combining the two functions of air distribution and liquid circulation into one garment. In both modes, the physiological data (and in the case of liquid cooling, the heat removal values) indicated the ability of the hybrid garment to function as effectively as the existing air and liquid vests at the work rate and environmental conditions chosen.

The next iteration of the hybrid vest must maintain the level of performance demonstrated in the study while eliminating the comfort and fit problems highlighted in the previous section. The present design of the hybrid garment should allow for the necessary alterations to be made without deleterious impact on performance. Shortening the vest and streamlining the collar can be done with no reduction of liquid-cooling surface area. The liquid umbilical, once lengthened, should run parallel to and be attached to the existing air umbilical hose. The connectors for each should readily permit them to be coupled next to each other. By incorporating these engineering changes with information gathered by a sizing study, a fieldable hybrid garment design can confidently proceed.

REFERENCES

1. T.H Tassinari and V.D. Iacono, "Microclimate controlled tank crewmen clothing for extended mission time in chemical-biological environments" NATICK/TR-85/002L, December 1984 (AD B089337L).
2. N.A. Pimental, H.M. Cosimini, M.N. Sawka, and C.B. Wenger, "Effectiveness of an air-cooled vest using selected air temperature and humidity combinations" Aviation, Space, and Environmental Medicine, February 1987, pp. 119-124.
3. A.J. Young, M.N. Sawka, Y. Epstein, B.S. DeCristofano, and K.B. Pandolf, "Cooling different body surfaces during upper and lower body exercise" Journal of Applied Physiology, September 1987, pp. 1218-1223.
4. B.S. Cadarette, A.J. Young, B.S. DeCristofano, K.L. Speckman, M.N. Sawka, "Physiological responses to a prototype hybrid air-liquid microclimate cooling system during exercise in the heat" USARIEM report in preparation.

DISTRIBUTION LIST

- 1 copy to:
COMMANDANT
US ARMY CHEMICAL SCHOOL
ATTN: ATZN-CH-CS
FT. McCLELLAN, AL 36205-5020
- 1 copy to:
NAVAL SEA SYSTEMS COMMAND
PROGRAM OFFICE PMS 310
WASHINGTON, D.C. 20362-5101
- 1 copy to:
DIRECTOR
MARINE CORPS DEVELOPMENT CENTER
FIRE POWER DIVISION
CODE D091
QUANTICO, VA 22134-5080
- 1 copy to:
US NAVY CLOTHING & TEXTILE
RESEARCH FACILITY
ATTN: CODE 40.1
21 STRATHMORE ROAD
NATICK, MA 01760-2490
- 1 copy to:
COMMANDER
US ARMY TANK-AUTOMOTIVE COMMAND
ATTN: AMSTA-NR
WARREN, MI 48397-5000
- 1 copy to:
COMMANDER
US ARMY FOREIGN SCIENCE &
TECHNOLOGY CENTER
ATTN: AIAST-RA-ST4
CHARLOTTESVILLE, VA 22901
- 1 copy to:
ADMINISTRATOR
DEFENSE DOCUMENTATION CENTER
CAMERON STATION
ALEXANDRIA, VA 22314
- 1 copy to:
COMMANDER
US ARMY BELVOIR RD&E CENTER
ATTN: STRBE-FE
FT. BELVOIR, VA 22060

- 1 copy to:
COMMANDER
US ARMY TRAINING AND DOCTRINE
COMMAND
ATTN: ATCD-SE
FT. MONROE, VA 23651
- 1 copy to:
DIRECTOR
HUMAN ENGINEERING LABORATORY
ATTN: AMCHE-FT
ABERDEEN PROVING GROUND, MD
21010
- 1 copy to:
DEPARTMENT OF THE ARMY
PROJECT MANAGER - CLOTHING AND
INDIVIDUAL EQUIPMENT
P.O. BOX 4206
WOODBIDGE, VA 22194-4206
- 1 copy to:
HEADQUARTERS
DEPARTMENT OF THE ARMY
OFFICE FOR THE DEPUTY CHIEF OF
STAFF FOR RD&A
WASHINGTON, D.C. 20310
- 1 copy to:
COMMANDER
US AIR FORCE AERONAUTICAL
SYSTEMS DIVISION
WRIGHT-PATTERSON AFB, OH
45433-6503
- 1 copy to:
AIR FORCE SCHOOL OF AEROSPACE
MEDICINE
ATTN: VNC
BROOKS AFB, TX 78235
- 1 copy to:
NAVAL AIR DEVELOPMENT CENTER
ATTN: Mr. George Hkydd
CODE 6023
WARMINSTER, PA 18974-5000
- 1 copy to:
COMMANDER
US ARMY AEROSPACE RESEARCH
LABORATORY
ATTN: SGRD-VAB-CB, BOX 577
FT. RUCKER, AL 36362-5000

- 1 copy to:
COMMANDER
US ARMY AVSCOM
ATTN: AMCPM-ALSE
4300 GOODFELLOW BLVD
ST. LOUIS, MO 63120-1798
- 1 copy to:
COMMANDER
US ARMY ARMOR CENTER
ATTN: ATSB-CD-ML
FT. KNOX, KY 40160
- 1 copy to:
COMMANDER
US ARMY CHEMICAL RD&E CENTER
ATTN: AMCCR-PPC
ABERDEEN PROVING GROUNDS, MD
21010-5423
- 1 copy to:
OFFICE OF THE UNDERSECRETARY OF
DEFENSE FOR RESEARCH AND
ENGINEERING (E&LS)
ROOM 3D129, THE PENTAGON
WASHINGTON, D.C. 20301-3080
- 1 copy to:
COMMANDER
NAVAL AIR SYSTEMS COMMAND
ATTN: A-5311
WASHINGTON, D.C. 20361-5310
- 1 copy to:
PRAM Program Office
ATTN: AFALC/RA (LT COL Fleig)
Wright-Patterson AFB, OH
45433-5000
- 1 copy to:
U.S. Coast Guard (GDNT-3)
2100 2nd Street S.W.
Washington, D.C. 20543-5000