

MEMORANDUM REPORT BRL-MR-3733

**BRL**


1938 - Serving the Army for Fifty Years - 1988

AD-A205 633

THE AERODYNAMIC CHARACTERISTICS  
OF 7.62MM MATCH BULLETS

ROBERT L. McCOY

DECEMBER 1988

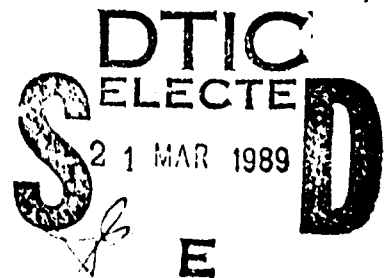

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

U.S. ARMY LABORATORY COMMAND

**BALLISTIC RESEARCH LABORATORY  
ABERDEEN PROVING GROUND, MARYLAND**

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

| REPORT DOCUMENTATION PAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |                                                    |                                                                                                  | Form Approved<br>CMB No. 0704-0188    |                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------|----------------------------------|
| 1a. REPORT SECURITY CLASSIFICATION<br>UNCLASSIFIED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |                                                    | 1b. RESTRICTIVE MARKINGS                                                                         |                                       |                                  |
| 2a. SECURITY CLASSIFICATION AUTHORITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |                                                    | 3. DISTRIBUTION/AVAILABILITY OF REPORT<br>Approved for public release; distribution is unlimited |                                       |                                  |
| 2b. DECLASSIFICATION/DOWNGRADING SCHEDULE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |                                                    |                                                                                                  |                                       |                                  |
| 4. PERFORMING ORGANIZATION REPORT NUMBER(S)<br>BRL-MR-3733                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |                                                    | 5. MONITORING ORGANIZATION REPORT NUMBER(S)                                                      |                                       |                                  |
| 6a. NAME OF PERFORMING ORGANIZATION<br>US Army<br>Ballistic Research Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       | 6b. OFFICE SYMBOL<br>(If applicable)<br>SLCBR-LF   | 7a. NAME OF MONITORING ORGANIZATION                                                              |                                       |                                  |
| 6c. ADDRESS (City, State, and ZIP Code)<br>Aberdeen Proving Ground, MD 21005-5066                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |       |                                                    | 7b. ADDRESS (City, State, and ZIP Code)                                                          |                                       |                                  |
| 8a. NAME OF FUNDING/SPONSORING ORGANIZATION<br>US Army<br>Ballistic Research Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       | 8b. OFFICE SYMBOL<br>(If applicable)<br>SLCBR-DD-T | 9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER                                                  |                                       |                                  |
| 8c. ADDRESS (City, State, and ZIP Code)<br>Aberdeen Proving Ground, MD 21005-5066                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |       |                                                    | 10. SOURCE OF FUNDING NUMBERS                                                                    |                                       |                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |                                                    | PROGRAM<br>ELEMENT NO.<br>62618A                                                                 | PROJECT<br>NO.<br>1L1<br>62618AH80    | TASK<br>NO.                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |                                                    |                                                                                                  |                                       | WORK UNIT<br>ACCESSION NO.       |
| 11. TITLE (Include Security Classification)<br>The Aerodynamic Characteristics of 7.62mm Match Bullets                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |                                                    |                                                                                                  |                                       |                                  |
| 12. PERSONAL AUTHOR(S)<br>McCOY, ROBERT L.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |                                                    |                                                                                                  |                                       |                                  |
| 13a. TYPE OF REPORT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       | 13b. TIME COVERED<br>FROM _____ TO _____           |                                                                                                  | 14. DATE OF REPORT (Year, Month, Day) |                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |                                                    |                                                                                                  | 15. PAGE COUNT                        |                                  |
| 16. SUPPLEMENTARY NOTATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |       |                                                    |                                                                                                  |                                       |                                  |
| 17. COSATI CODES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |       |                                                    | 18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)                |                                       |                                  |
| FIELD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | GROUP | SUB-GROUP                                          |                                                                                                  |                                       |                                  |
| 01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 01    |                                                    | 7.62mm Match Bullets Gyroscopic Stability                                                        |                                       |                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |                                                    | Aerodynamic Characteristics Dynamic Stability                                                    |                                       |                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       |                                                    | Aerodynamic Drag Yaw Limit-Cycle                                                                 |                                       |                                  |
| 19. ABSTRACT (Continue on reverse if necessary and identify by block number)<br>Spark photography range tests of three 7.62mm match bullets were conducted to determine the aerodynamic and flight dynamic characteristics at supersonic and subsonic speeds. The drag coefficients of the match bullets were determined, and recommendations for rifling twist rates to insure gyroscopic stability were made. The observed nonlinear Magnus moment properties of the 7.62mm match bullets predict a small slow arm limit cycle yaw at supersonic speeds, and a larger limit cycle yaw at subsonic speeds. |       |                                                    |                                                                                                  |                                       |                                  |
| 20. DISTRIBUTION/AVAILABILITY OF ABSTRACT<br><input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS                                                                                                                                                                                                                                                                                                                                                                                                                            |       |                                                    | 21. ABSTRACT SECURITY CLASSIFICATION<br>UNCLASSIFIED                                             |                                       |                                  |
| 22a. NAME OF RESPONSIBLE INDIVIDUAL<br>ROBERT L. McCOY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |                                                    | 22b. TELEPHONE (Include Area Code)<br>301-278-3880                                               |                                       | 22c. OFFICE SYMBOL<br>SLCBR-LF-T |

# Table of Contents

|                                                                       | <u>Page</u> |
|-----------------------------------------------------------------------|-------------|
| List of Figures . . . . .                                             | v           |
| List of Tables . . . . .                                              | vii         |
| I. Introduction . . . . .                                             | 1           |
| II. Test Facilities and Material . . . . .                            | 1           |
| III. Results . . . . .                                                | 2           |
| 1. Drag Coefficient . . . . .                                         | 2           |
| 2. Overturning Moment Coefficient . . . . .                           | 3           |
| 3. Gyroscopic Stability . . . . .                                     | 4           |
| 4. Lift Force Coefficient . . . . .                                   | 4           |
| 5. Magnus Moment Coefficient and Pitch Damping Moment Coefficient . . | 4           |
| 6. Damping Rates . . . . .                                            | 6           |
| IV. Conclusions . . . . .                                             | 7           |
| V. Recommendations . . . . .                                          | 8           |
| References . . . . .                                                  | 59          |
| List of Symbols . . . . .                                             | 61          |
| Distribution List . . . . .                                           | 65          |

|                    |                                     |
|--------------------|-------------------------------------|
| Accession For      |                                     |
| NAME               | <input checked="" type="checkbox"/> |
| DATE               | <input type="checkbox"/>            |
| Unprocessed        | <input type="checkbox"/>            |
| Justification      |                                     |
| By                 |                                     |
| Distribution/      |                                     |
| Availability Codes |                                     |
| Avail and/or       |                                     |
| Dist               | Special                             |
| A-1                |                                     |

## List of Figures

| <u>Figure</u> |                                                                                         | <u>Page</u> |
|---------------|-----------------------------------------------------------------------------------------|-------------|
| 1             | Photograph of the BRL Free Flight Aerodynamics Range. . . . .                           | 9           |
| 2             | Coordinate System for the BRL Aerodynamics Range. . . . .                               | 10          |
| 3             | Sketch of the M118 Match (Special Ball) Bullet. . . . .                                 | 11          |
| 4             | Sketch of the 190 Grain Sierra Matchking Bullet. . . . .                                | 12          |
| 5             | Sketch of the 168 Grain Sierra International (M852) Bullet. . . . .                     | 13          |
| 6             | Shadowgraph of M118 Bullet at Mach 2.2. . . . .                                         | 14          |
| 7             | Shadowgraph of 190 Grain Sierra Bullet at Mach 2.2. . . . .                             | 15          |
| 8             | Shadowgraph of 168 Grain Sierra Bullet at Mach 2.2. . . . .                             | 16          |
| 9             | Shadowgraph of M118 Bullet at Mach 1.8. . . . .                                         | 17          |
| 10            | Shadowgraph of 190 Grain Sierra Bullet at Mach 1.8. . . . .                             | 18          |
| 11            | Shadowgraph of 168 Grain Sierra Bullet at Mach 1.8. . . . .                             | 19          |
| 12            | Shadowgraph of M118 Bullet at Mach 1.4. . . . .                                         | 20          |
| 13            | Shadowgraph of 190 Grain Sierra Bullet at Mach 1.4. . . . .                             | 21          |
| 14            | Shadowgraph of 168 Grain Sierra Bullet at Mach 1.4. . . . .                             | 22          |
| 15            | Shadowgraph of M118 Bullet at Mach 1.1. . . . .                                         | 23          |
| 16            | Shadowgraph of 190 Grain Sierra Bullet at Mach 1.1. . . . .                             | 24          |
| 17            | Shadowgraph of 168 Grain Sierra Bullet at Mach 1.1. . . . .                             | 25          |
| 18            | Zero-Yaw Drag Force Coefficient versus Mach Number, M118 Bullet. . . . .                | 26          |
| 19            | Zero-Yaw Drag Force Coefficient versus Mach Number, 190 Grain Sierra<br>Bullet. . . . . | 27          |
| 20            | Zero-Yaw Drag Force Coefficient versus Mach Number, 168 Grain Sierra<br>Bullet. . . . . | 28          |
| 21            | Yaw Drag Force Coefficient versus Mach Number, M118 Bullet. . . . .                     | 29          |
| 22            | Yaw Drag Force Coefficient versus Mach Number, 190 Grain Sierra Bullet. .               | 30          |
| 23            | Yaw Drag Force Coefficient versus Mach Number, 168 Grain Sierra Bullet. .               | 31          |
| 24            | Zero-Yaw Overturning Moment Coefficient versus Mach Number, M118 Bullet.                | 32          |

## List of Figures (Continued)

| <u>Figure</u> |                                                                                              | <u>Page</u> |
|---------------|----------------------------------------------------------------------------------------------|-------------|
| 25            | Zero-Yaw Overturning Moment Coefficient versus Mach Number, 190 Grain Sierra Bullet. . . . . | 33          |
| 26            | Zero-Yaw Overturning Moment Coefficient versus Mach Number, 168 Grain Sierra Bullet. . . . . | 34          |
| 27            | Gyroscopic Stability Factor versus Mach Number, M118 Bullet. . . . .                         | 35          |
| 28            | Gyroscopic Stability Factor versus Mach Number, 190 Grain Sierra Bullet. .                   | 36          |
| 29            | Gyroscopic Stability Factor versus Mach Number, 168 Grain Sierra Bullet. .                   | 37          |
| 30            | Lift Force Coefficient versus Mach Number. . . . .                                           | 38          |
| 31            | Magnus Moment Coefficient versus Effective Squared Yaw. . . . .                              | 39          |
| 32            | Magnus Moment Coefficient versus Effective Squared Yaw. . . . .                              | 40          |
| 33            | Magnus Moment Coefficient versus Effective Squared Yaw. . . . .                              | 41          |
| 34            | Magnus Moment Coefficient versus Effective Squared Yaw. . . . .                              | 42          |
| 35            | Zero-Yaw Magnus Moment Coefficient versus Mach Number. . . . .                               | 43          |
| 36            | Zero-Yaw Magnus Moment Coefficient versus Mach Number. . . . .                               | 44          |
| 37            | Zero-Yaw Pitch Damping Moment Coefficient versus Mach Number. . . . .                        | 45          |
| 38            | Zero-Yaw Pitch Damping Moment Coefficient versus Mach Number. . . . .                        | 46          |
| 39            | Fast Arm Damping Rate versus Effective Squared Yaw. . . . .                                  | 47          |
| 40            | Slow Arm Damping Rate versus Effective Squared Yaw. . . . .                                  | 48          |
| 41            | Fast Arm Damping Rate versus Effective Squared Yaw. . . . .                                  | 49          |
| 42            | Slow Arm Damping Rate versus Effective Squared Yaw. . . . .                                  | 50          |

## List of Tables

| <u>Table</u> |                                                                             | <u>Page</u> |
|--------------|-----------------------------------------------------------------------------|-------------|
| 1            | Average Physical Characteristics of 7.62mm Match Bullets. . . . .           | 51          |
| 2            | Aerodynamic Characteristics of the M118 Match Bullet. . . . .               | 52          |
| 3            | Aerodynamic Characteristics of the 190 Grain Sierra Matchking Bullet. . .   | 53          |
| 4            | Aerodynamic Characteristics of the 168 Grain Sierra International Bullet. . | 54          |
| 5            | Flight Motion Parameters of the M118 Match Bullet. . . . .                  | 55          |
| 6            | Flight Motion Parameters of the 190 Grain Sierra Matchking Bullet. . . . .  | 56          |
| 7            | Flight Motion Parameters of the 168 Grain Sierra International Bullet. . .  | 57          |

## I. Introduction

The marksmanship training units of the various U.S. Armed Services have traditionally been interested in the ballistics of national match rifles and ammunition. The Ballistic Research Laboratory (BRL) has received many questions over the years concerning match ammunition performance, from captains of service rifle teams, marksmanship training instructors, and U.S. Olympic match shooters. The answers provided in the past by the BRL were best estimates, since no aeroballistic data had ever been collected for match ammunition.

The first BRL spark photography range firings of a match bullet were conducted in 1975, using the 7.62mm, 168 grain Sierra International bullet, fired from a Remington 40-XB match rifle chambered for 7.62mm NATO (.308 Winchester). The 168 grain Sierra International is a commercial match bullet, which is currently loaded in the M852 Match ammunition. Additional spark range tests were conducted in 1980, to extend the data base for the 168 grain Sierra International bullet, and to determine the aeroballistic properties of the 7.62mm M118 Match (Special Ball) ammunition, and the 190 grain Sierra Matchking Hollow Point bullet.

This report is a consolidation of all the BRL aeroballistic data collected for 7.62mm match bullets from 1975 to the present.

## II. Test Facilities and Material

The spark range firings were conducted in the BRL Free Flight Aerodynamics Range.<sup>1</sup> The Aerodynamics Range is an enclosed, instrumented firing range designed to accurately record the flight of a projectile over approximately 90 metres of its trajectory. The free flight range technique for obtaining aerodynamic data demands unusually high accuracy in the measurement of position, time of flight, and projectile pitch and yaw angles. Figure 1 is a photograph (circa 1958) of the BRL Free Flight Aerodynamics Range. Figure 2 is a schematic illustration of the coordinate reference system for the range.

The 1975 firings of the 168 grain Sierra International bullet were conducted using a Remington Model 40-XB "Rangemaster" Center Fire Rifle, chambered in .308 Winchester, with a 27.25 inch barrel, and a rifling twist rate of 1 turn in 12 inches. Launch Mach numbers varied from 2.2 down to 1.4, and yaw levels from 1 degree to 7 degrees were induced using a half-muzzle yaw inducer with a variable lip extension. For the 1980 firings of the M118 Match and the 190 grain Sierra Matchking bullets, a Remington Model 700 ADL rifle chambered in .308 Winchester was used. The Model 700 barrel length was 22 inches, and rifling twist rate was 1 turn in 10 inches. The faster twist rifling was used for the 1980 tests because preliminary calculations had indicated that the gyroscopic stability of the heavier bullets might be too low at subsonic launch velocities, from the 12 inch twist barrel used in 1975.

Launch Mach numbers for the 1980 tests varied from 2.2 down to 0.6, so the entire useful velocity range of the match bullets would be covered. For completeness, the 168 grain Sierra International bullets were also tested at low supersonic and subsonic speeds. Yaw levels induced in the 1980 tests were essentially the same as those obtained in 1975.

All firings used Lake City Match cartridge cases, and appropriate charges of IMR 4895 propellant were used for the higher supersonic speeds. Reduced charges of IMR 4198 propellant were used for the lower supersonic velocities. Further reduced charges of Hercules 2400 and Hercules UNIQUE were used to achieve the desired subsonic speeds. Figures 3 through 5 are sketches of the three match bullets tested. A sample of five each of the three projectile types were measured for complete physical characteristics. The average physical properties of the match bullets are presented in Table 1.

### III. Results

The free flight spark range data were fitted to solutions of the linearized equations of motion and the resulting flight motion parameters were used to infer linearized aerodynamic coefficients, using the methods of Reference 2. Preliminary analysis of the aerodynamic data showed distinct variation of several coefficients with yaw level. In BRL Report 974, Murphy<sup>3</sup> has shown that aerodynamic coefficients derived from the linearized data reduction can be used to infer the coefficients in a nonlinear force and moment expansion, if sufficient data are available. For the 7.62mm match bullets, sufficient data were obtained to permit determination of several nonlinear aerodynamic coefficients. A more detailed analysis of nonlinear effects is presented in the subtopics of this section, which discuss individual aerodynamic coefficients.

An interesting and useful by-product of spark photography range testing is the high quality shadowgraph information obtained. Figures 6 through 17 show the flowfields around the three 7.62mm match bullets at four supersonic Mach numbers. The shadowgraph figures were selected from range stations where the angle of attack was less than one degree.

The round-by-round aerodynamic data obtained for the 7.62mm match bullets are listed in Tables 2, 3 and 4. Free flight motion parameters for the three bullets are listed in Tables 5, 6 and 7.

#### 1. Drag Coefficient

The drag coefficient,  $C_D$ , is determined by fitting the time-distance measurements from the range flight.  $C_D$  is distinctly nonlinear with yaw level, and the value determined from an individual flight reflects both the zero-yaw drag coefficient,  $C_{D_0}$ , and the induced

drag due to the average yaw level of the flight. The drag coefficient variation is expressed as an even power series in yaw amplitude:

$$C_D = C_{D_0} + C_{D_{\delta^2}} \delta^2 + \dots \quad (1)$$

where  $C_{D_0}$  is the zero-yaw drag coefficient  $C_{D_{\delta^2}}$  is the quadratic yaw drag coefficient, and  $\delta^2$  is the total angle of attack squared.

Analysis of the zero-yaw drag coefficient data for the 7.62mm match bullets showed that the M118 bullet had the lowest drag of the three designs tested, at supersonic speeds. The 190 grain Sierra Matchking averaged four percent higher drag than the M118, and the 168 grain Sierra International bullet averaged eight percent higher drag than the military M118 design, over the Mach number range 2.2 to 1.1. At subsonic speeds, the zero-yaw drag coefficients of the three bullets are nearly identical. Figures 18, 19 and 20 show the variation of zero-yaw drag coefficient with Mach number for the three match bullets tested. The variation of the quadratic yaw drag coefficients,  $C_{D_{\delta^2}}$ , with Mach number are shown in Figures 21, 22 and 23, for the respective bullet designs. The yaw drag coefficients presented were used to correct the range measured total drag coefficients to zero-yaw values. Dashed portions of curves are used throughout this report to indicate trends, in regions where no data were collected.

The round-to-round standard deviation in zero-yaw drag coefficient at supersonic speeds was determined for each match bullet design, from the least-squares fit of the drag data. All the 7.62mm match bullets showed standard deviations in  $C_{D_0}$  between 0.7 percent and 0.8 percent, which represents significant improvement over the one to three percent drag standard deviations typical of military ball projectiles. The standard deviation in drag coefficient for an individual flight in the BRL Aerodynamics Range is of order of 0.2 percent, hence the measurement error does not contribute significantly to the observed round-to-round standard deviation in drag.

## 2. Overturning Moment Coefficient

The range values of the overturning moment coefficient,  $C_{M_\alpha}$ , were fitted using the appropriate squared-yaw parameters from Reference 3. A weak dependence of  $C_{M_\alpha}$  on yaw level was observed for all the 7.62mm match bullets. The overturning moment is assumed to be cubic in yaw level, and the coefficient variation is given by:

$$C_{M_\alpha} = C_{M_{\alpha_0}} + C_2 \delta^2 + \dots \quad (2)$$

where  $C_{M_{\alpha_0}}$  is the zero-yaw overturning moment coefficient, and  $C_2$  is the cubic coefficient.

The variation of  $C_{M_{\alpha_0}}$  with Mach number for the three 7.62mm match bullets is shown in Figures 24 through 26. The cubic overturning moment coefficients,  $C_2$ , used to correct the range values of  $C_{M_\alpha}$  to zero-yaw conditions, are included on the figures.

### 3. Gyroscopic Stability

The variation of launch gyroscopic stability factor,  $S_g$ , with launch Mach number, at standard atmospheric conditions, is shown for the three 7.62mm match bullets in Figures 27 through 29. The stability factors for 10 inch twist and 12 inch twist of rifling are illustrated. For a launch Mach number of 2.3 (muzzle velocity approximately 2570 feet/second), the M118 bullet from a 12 inch twist barrel has a gyroscopic stability factor of 1.4; the stability factor of the 190 grain Sierra Matchking at the same muzzle velocity and twist rate is 1.3. The corresponding value of  $S_g$  for the 168 grain Sierra International bullet at the same conditions is 1.65. Thus all the above 7.62mm match bullets are gyroscopically stable when fired from a 12 inch twist barrel at muzzle velocities greater than 2500 feet/second. However, for the M118 bullet, and especially for the 190 grain Sierra Matchking, there is no margin of safety for cold weather (high air density) atmospheric conditions, if a 12 inch twist is selected.

A launch gyroscopic stability factor between 1.5 and 2.0 is usually specified, to insure ample safety margin under worst case conditions. Thus for the 7.62mm NATO cartridge, the 12 inch twist rate is an excellent choice for the 168 grain Sierra International (M852) bullet, and a 10 inch twist barrel should be selected for the M118 or 190 grain Sierra Matchking bullets.

### 4. Lift Force Coefficient

The range values of the lift force coefficient,  $C_{L_a}$ , were also analyzed using the methods of Reference 3. No significant value of the cubic lift force coefficient could be found, for any of the three 7.62mm match bullets. The range values of the lift force coefficient are plotted against Mach number in Figure 30.

No significant difference in lift force coefficient with bullet type is observed in Figure 30. The curve in the plot was obtained from a least squares fit of the  $C_{L_a}$  data, and should be used for all three 7.62mm match bullets. The lift force coefficient is not as well determined from spark range tests as is the overturning moment coefficient. This fact is reflected in the larger round-to-round data scatter observed in Figure 30, compared with the overturning moment coefficient data plotted in Figures 24 through 26.

### 5. Magnus Moment Coefficient and Pitch Damping Moment Coefficient

The Magnus moment coefficient,  $C_{M_{pa}}$ , and the pitch damping moment coefficient,  $(C_{M_q} + C_{M_a})$ , are discussed together, since if either coefficient is nonlinear with yaw level, both coefficients exhibit nonlinear coupling in the data reduction process.<sup>3</sup> Due to mutual reaction, the analysis of  $C_{M_{pa}}$  and  $(C_{M_q} + C_{M_a})$  must be performed simultaneously, although the aerodynamic moments are not, in themselves, directly physically related.

If the dependence of the Magnus moment and the pitch damping moment are cubic in yaw level, the nonlinear variation of the two moment coefficients is of the general form:

$$C_{M_{p\alpha}} = C_{M_{p\alpha 0}} + \hat{C}_2 \delta^2 \quad (3)$$

$$(C_{M_q} + C_{M_{\dot{\alpha}}}) = (C_{M_q} + C_{M_{\dot{\alpha}}})_0 + d_2 \delta^2 \quad (4)$$

where  $C_{M_{p\alpha 0}}$  and  $(C_{M_q} + C_{M_{\dot{\alpha}}})_0$  are the zero-yaw values of Magnus and pitch damping moment coefficients, respectively, and  $\hat{C}_2$  and  $d_2$  are the associated cubic coefficients.

In Reference 3, it is shown that the non-linear coupling introduced through the data reduction yields the following expressions for range values [ $R$ -subscript] of  $C_{M_{p\alpha}}$  and  $(C_{M_q} + C_{M_{\dot{\alpha}}})$ :

$$[C_{M_{p\alpha}}]_R = C_{M_{p\alpha 0}} + \hat{C}_2 \delta_e^2 + d_2 \delta_{eTH}^2 \quad (5)$$

$$[(C_{M_q} + C_{M_{\dot{\alpha}}})]_R = (C_{M_q} + C_{M_{\dot{\alpha}}})_0 + \hat{C}_2 \delta_{eHT}^2 + d_2 \delta_{eHH}^2 \quad (6)$$

where the above effective squared yaws are defined as:

$$\delta_e^2 = K_F^2 + K_S^2 + \frac{(\phi'_F K_F^2 - \phi'_S K_S^2)}{(\phi'_F - \phi'_S)} \quad (7)$$

$$\delta_{eTH}^2 = \left( \frac{I_x}{I_y} \right) \left[ \frac{(K_F^2 \phi'^2_F - K_S^2 \phi'^2_S)}{(\phi'^2_F - \phi'^2_S)} \right] \quad (8)$$

$$\delta_{eHT}^2 = \left( \frac{I_y}{I_x} \right) \left[ \frac{(\phi'_F + \phi'_S) (K_S^2 - K_F^2)}{(\phi'_F - \phi'_S)} \right] \quad (9)$$

$$\delta_{eHH}^2 = \frac{(\phi'_F K_S^2 - \phi'_S K_F^2)}{(\phi'_F - \phi'_S)} \quad (10)$$

The remaining symbols are defined in the List of Symbols in this report.

Preliminary analysis of the 7.62mm match bullet data showed strong nonlinearity in the range values of  $C_{M_{p\alpha}}$  and  $(C_{M_q} + C_{M_{\dot{\alpha}}})$  at angles of attack less than 2 degrees, for both supersonic and subsonic speeds. The data rounds were separated into Mach number groups, by bullet type, and an analysis was performed to determine the cubic coefficients at both small and large yaw levels. No significant values of the cubic pitch damping moment coefficient,  $d_2$ , could be found.

The data were then analyzed assuming a cubic Magnus moment and linear pitch damping moment. Further analysis revealed no significant variation of either coefficient with bullet type at supersonic speeds, and all bullet types were then combined for final analysis.

The combined data rounds were again separated into Mach number groups, and final values of the cubic Magnus moment coefficient were obtained. Plots of the range Magnus moment coefficient versus  $\delta_c^2$  are shown in Figures 31 through 34, for the four Mach number intervals selected.

The Magnus moments of the 7.62mm match bullets show a bi-cubic behavior; i.e., a strong cubic dependence on angle of attack at small yaw level, followed by a very weak dependence on angle of attack at larger yaw levels. The small yaw cubic Magnus moment coefficient,  $\hat{C}_2$ , appears to be constant for all bullet types at all supersonic speeds, and has the value  $\hat{C}_2 = 250$ . The angle of attack at which bi-cubic behavior begins increases slowly with decreasing Mach number; at  $M = 2$  the critical angle of attack is around 2 degrees, and at  $M = 1.1$  the critical angle has increased to about 4 degrees. At subsonic speeds the value of  $\hat{C}_2 = 300$  was obtained, and bi-cubic behavior appears at angles of attack of approximately 5 degrees. A significant variation of the Magnus moment with bullet type is also observed at subsonic speeds, as is illustrated in Figure 34.

The cubic Magnus moment coefficients were then used to correct the range values of  $C_{M_{p\alpha}}$  and  $(C_{M_q} + C_{M_{\dot{\alpha}}})$  to zero-yaw conditions, and the results are illustrated in Figures 35 through 38. A comparison of Figures 35 and 36 shows that the three 7.62mm match bullets have essentially identical zero-yaw Magnus moment coefficients at supersonic speeds, but the 168 grain Sierra International bullet shows 50 percent larger (negative) coefficients than the other bullets, at subsonic speeds. The pitch damping moment coefficients, corrected to zero-yaw conditions, are shown in Figures 37 and 38. The effect of bullet type on the pitch damping moment at subsonic speeds is even more startling than that observed for the Magnus moment. The average value of  $(C_{M_q} + C_{M_{\dot{\alpha}}})_0$  for the M118 and the 190 grain Sierra Matchking bullets at subsonic speeds is approximately  $-4$ ; the 168 grain Sierra bullet shows three out of four values positive, with an average zero-yaw pitch damping moment coefficient of  $+1$ .

It should be noted that the analysis of nonlinear Magnus and pitch damping data from free flight spark ranges is a delicate process at best, and the results are highly sensitive to small errors in determination of the damping exponents on the two modal arms. The uncertainties in damping rate determinations are reflected in the larger round-to-round data scatter in Magnus and pitch damping moment coefficients, compared with the smaller scatter observed in the overturning moment coefficients.

## 6. Damping Rates

The damping rates,  $\lambda_F$  and  $\lambda_S$ , of the fast and slow yaw modes indicate the dynamic stability of a projectile. Negative  $\lambda$ 's indicate damping; a positive  $\lambda$  means that its associated modal arm will grow with increasing distance along the trajectory.

For a projectile whose Magnus or pitch damping moments are nonlinear with yaw level, the damping rates also show a nonlinear dependence on yaw. <sup>4</sup> Figures 39 through 42 illustrate the variations in damping rates with yaw level for the 7.62mm match bullets at supersonic and subsonic speeds.

At supersonic speeds, the fast arm is always damped, for all the bullet types, at all yaw levels tested. The slow arm is undamped at small yaw levels, but damped at larger yaw. Thus a slow arm limit cycle yaw is predicted at supersonic speeds; the expected magnitude is about 2 degrees.

At subsonic speeds, the fast arm is damped at all yaw levels for the M118 and 190 grain Sierra Matchking bullets. The fast arm for the 168 grain Sierra International bullet is essentially neutrally damped at small yaw, and is probably damped at larger yaw levels, although no data were taken to substantiate this estimate. The slow arm at subsonic speeds shows the same characteristic behavior observed at supersonic speeds; dynamically unstable at small yaw, but stable at larger yaw levels. The predicted magnitude of the slow arm limit cycle yaw at subsonic speeds is approximately 4.5 degrees for the M118 and 190 grain Sierra Matchking bullets, and about five degrees for the 168 grain Sierra International (M852) bullet.

No direct measurement of limit cycle yaw at long range has been made for any of the 7.62mm match bullets. However, a two degree limit cycle yaw at supersonic speeds and a four to five degree limit cycle yaw at subsonic speeds are consistent with unpublished results obtained by Piddington for the similarly shaped 7.62mm, Ball M80 bullet, and with results obtained by the author for 5.56mm M855 and SS-109 bullets. <sup>5</sup>

#### IV. Conclusions

The M118 Match (Special Ball) bullet has the lowest drag coefficient of the three 7.62mm match bullets tested, at supersonic speeds. The 190 grain Sierra Matchking bullet shows four percent higher average drag coefficient than the M118, and the 168 grain Sierra International (M852) bullet shows eight percent higher average drag coefficient than the M118 design.

The round-to-round variation in drag coefficient for the 7.62mm match bullets is significantly smaller than that observed for typical military ball bullets. The standard deviation in  $C_D$ , for the match bullets, at supersonic speeds, was found to be between 0.7 percent and 0.8 percent.

The three 7.62mm match bullets, launched at standard atmospheric conditions and at muzzle velocities above 2500 feet per second, are gyroscopically stable from a 12 inch twist of rifling. To insure an adequate margin of safety for cold weather (high air density) conditions, a 10 inch twist rate should be selected for the M118 and 190 grain Sierra Matchking bullets.

The nonlinear Magnus moment properties of the 7.62mm match bullets predict a slow arm limit cycle yaw of approximately two degrees at supersonic speeds, growing to four

to five degrees at subsonic speeds. Although the predicted limit cycle yaws are consistent with observations made for similarly shaped bullets, the long range flight dynamic results need to be verified by an independent experiment.


## **V. Recommendations**

It is recommended that a 12 inch twist of rifling be selected for firing the 168 grain Sierra International (M852) bullet from the 7.62mm NATO cartridge case. A 10 inch twist of rifling should be selected for the M118 or 190 grain Sierra Matchking bullets, to allow a cold weather safety margin.

A long range limit cycle yaw test should be conducted with 7.62mm match bullets, to verify the flight dynamic predictions made in this report.



Figure 1. Photograph of the BRL Free Flight Aerodynamics Range.

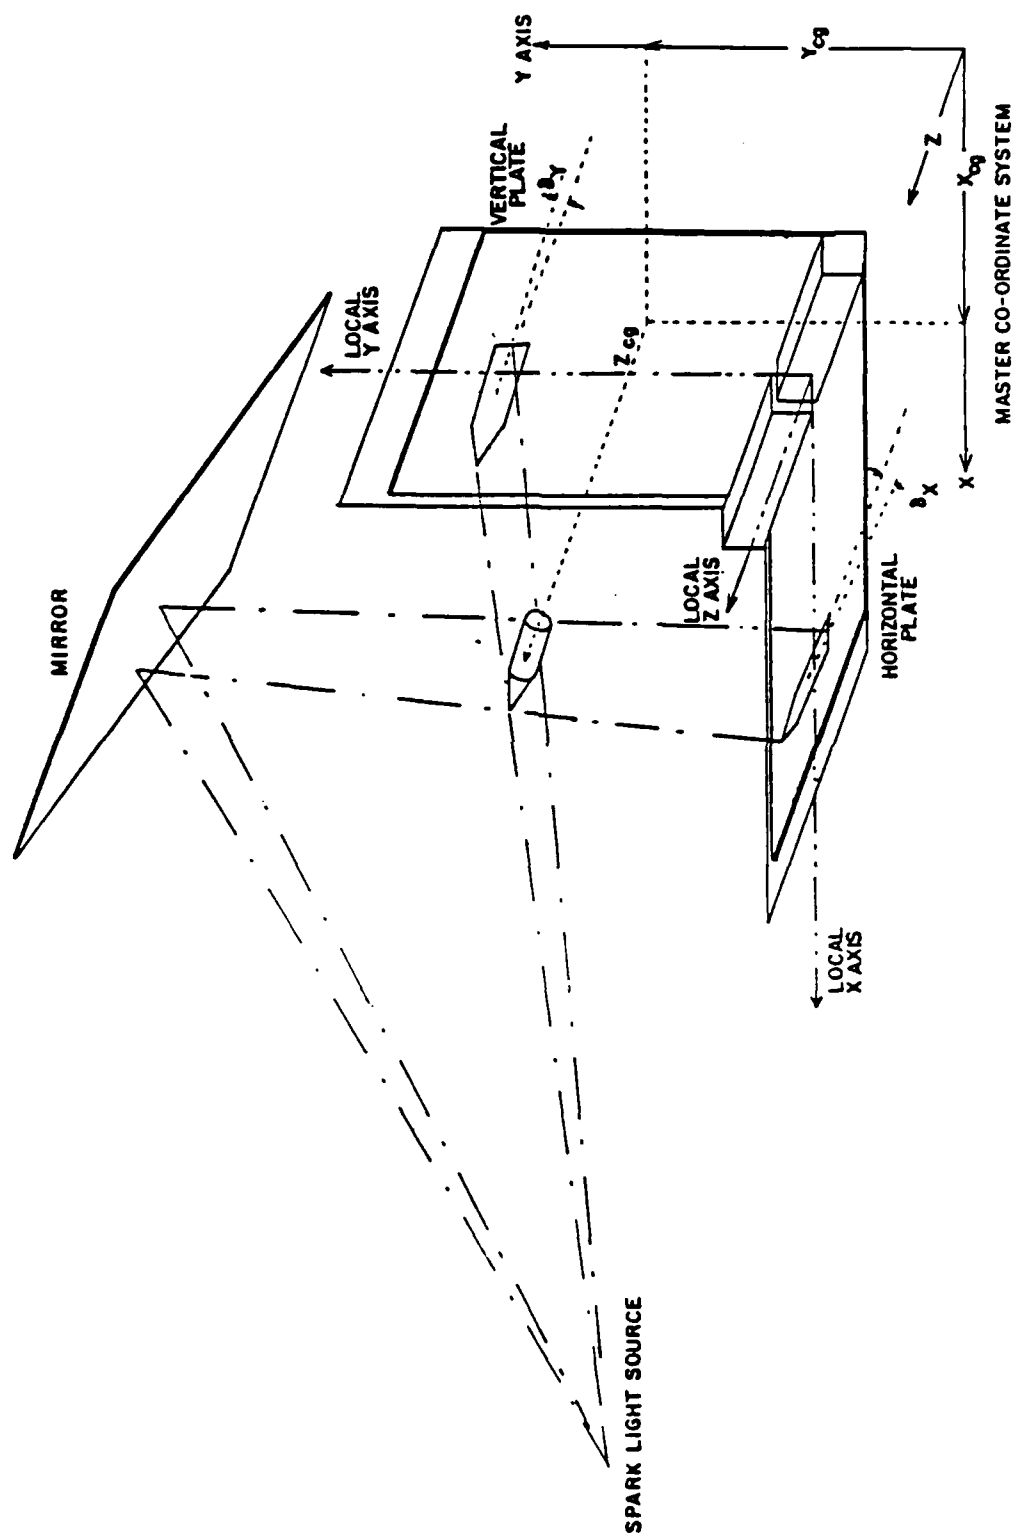

**Figure 2.** Coordinate System for the BRL Aerodynamics Range.

ALL DIMENSIONS IN CALIBERS  
(1 CALIBER = 7.82 mm )

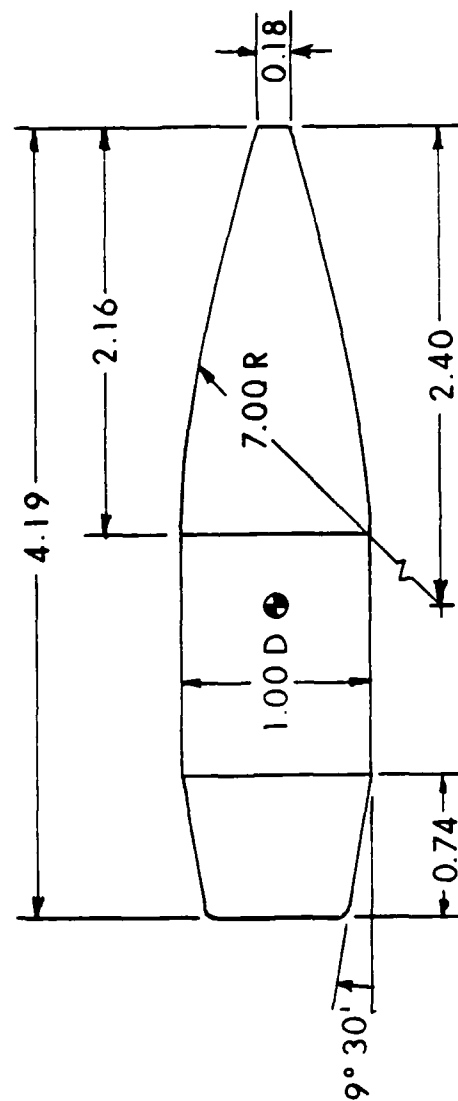


Figure 3. Sketch of the M118 Match (Special Ball) Bullet.

ALL DIMENSIONS IN CALIBERS  
(1 CALIBER = 7.82 mm)

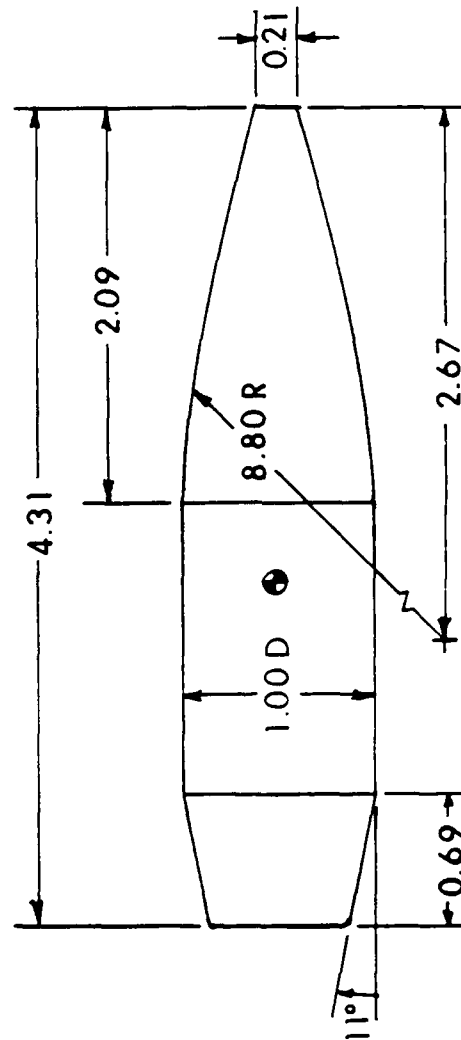


Figure 4. Sketch of the 190 Grain Sierra Matching Bullet.

ALL DIMENSIONS IN CALIBERS  
( 1 CALIBER = 7.82 mm )



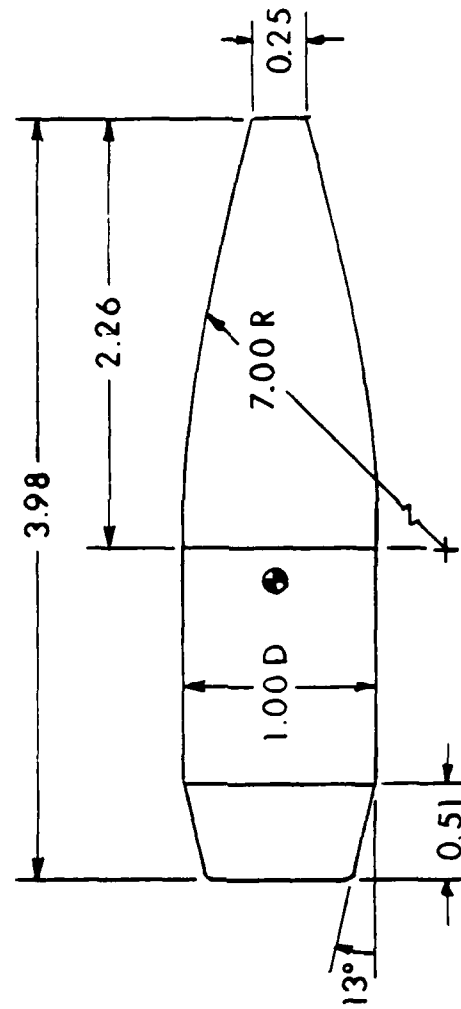



Figure 5. Sketch of the 168 Grain Sierra International (M852) Bullet.

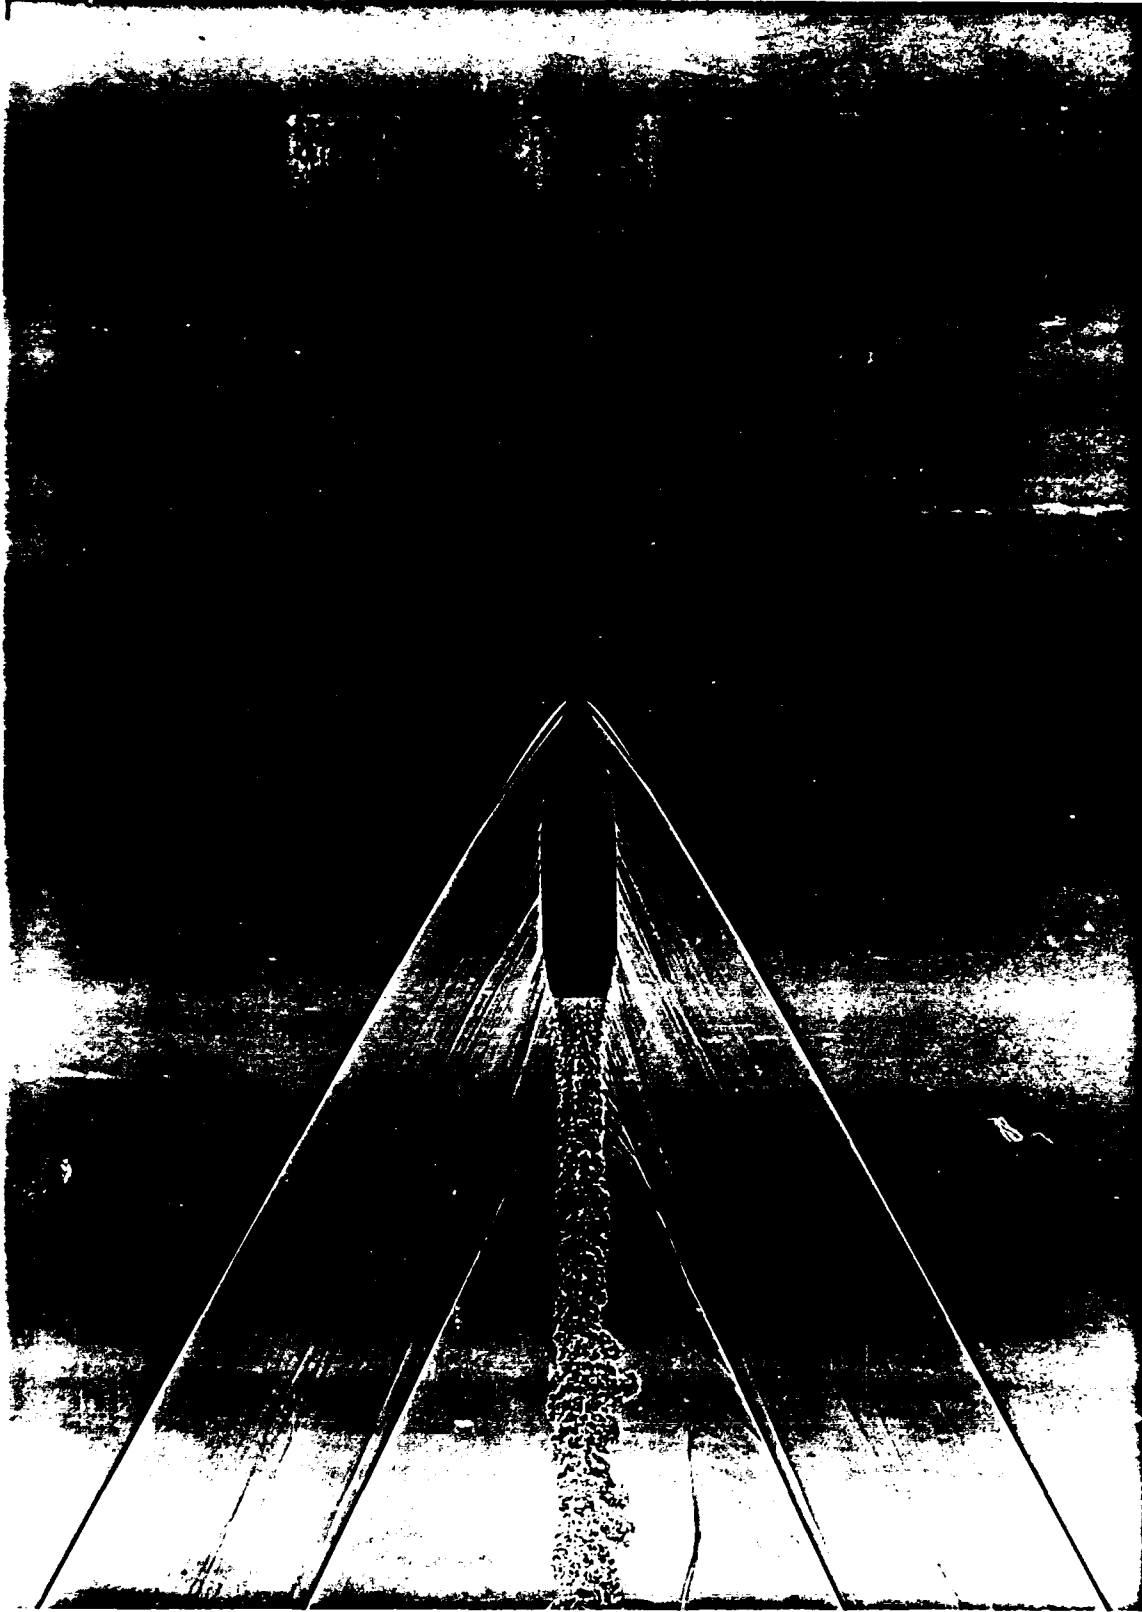


**Figure 6.** Shadowgraph of M118 Bullet at Mach 2.2.

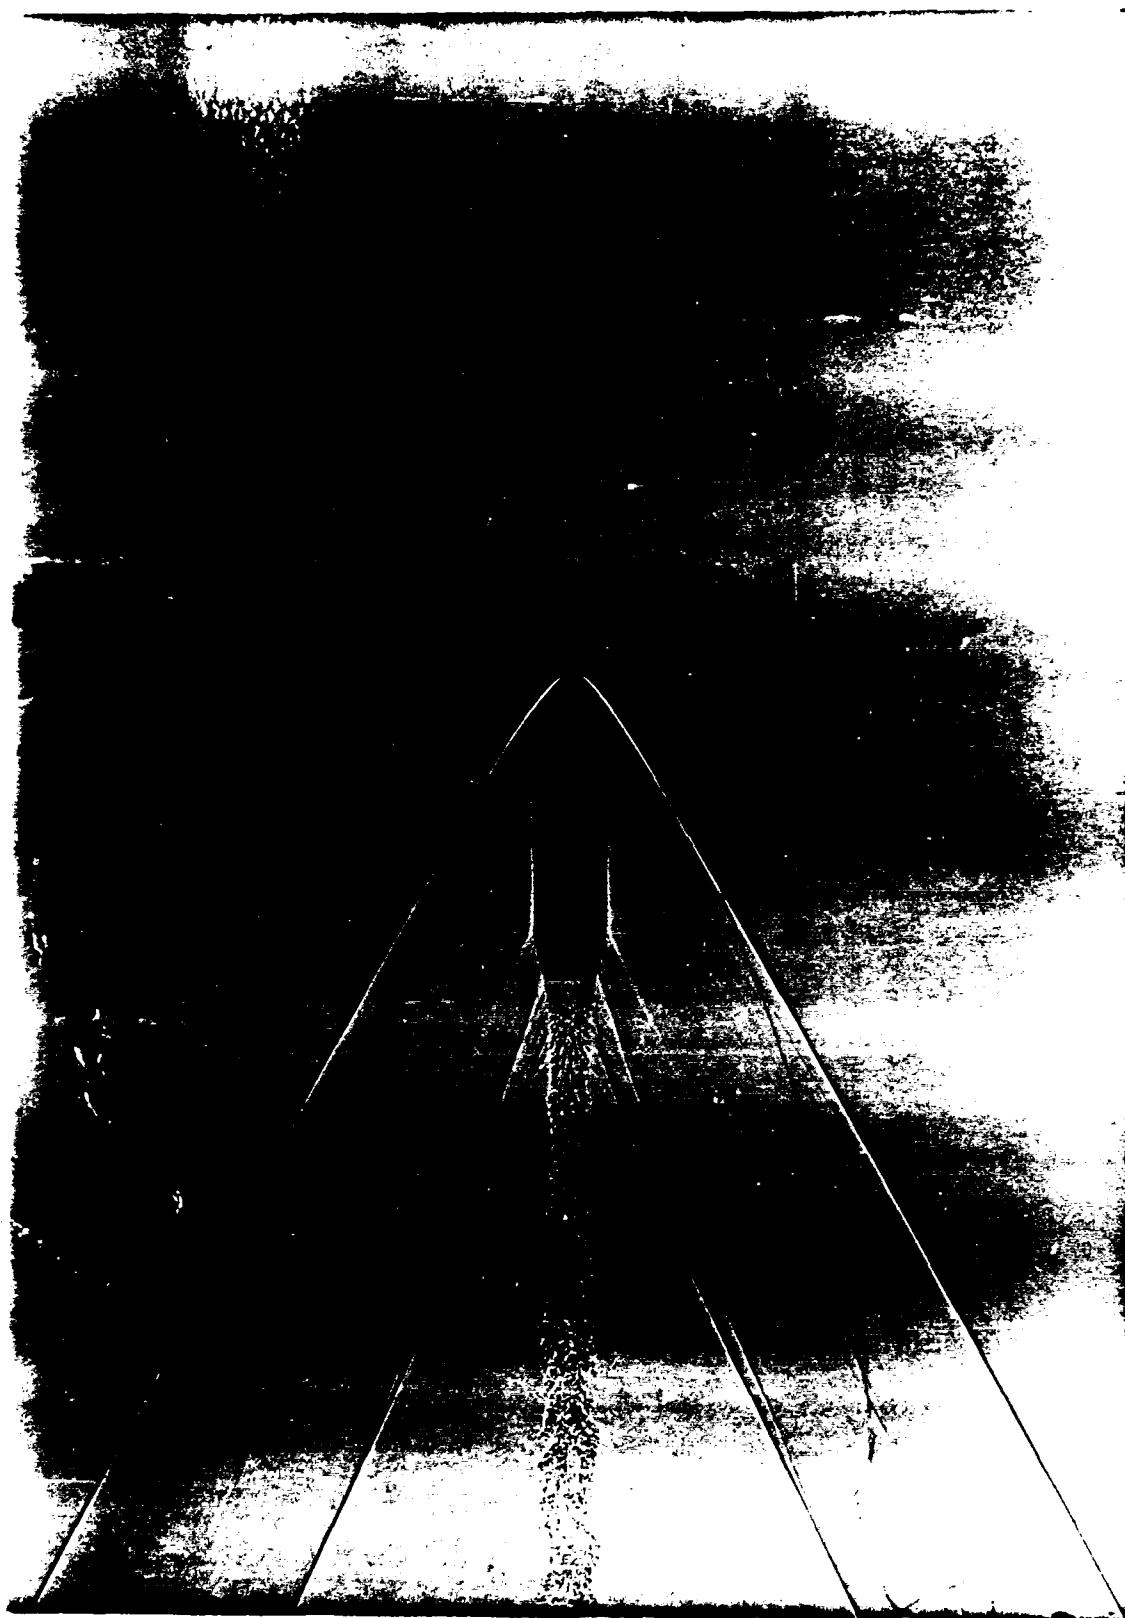


**Figure 7.** Shadowgraph of 190 Grain Sierra Bullet at Mach 2.2.

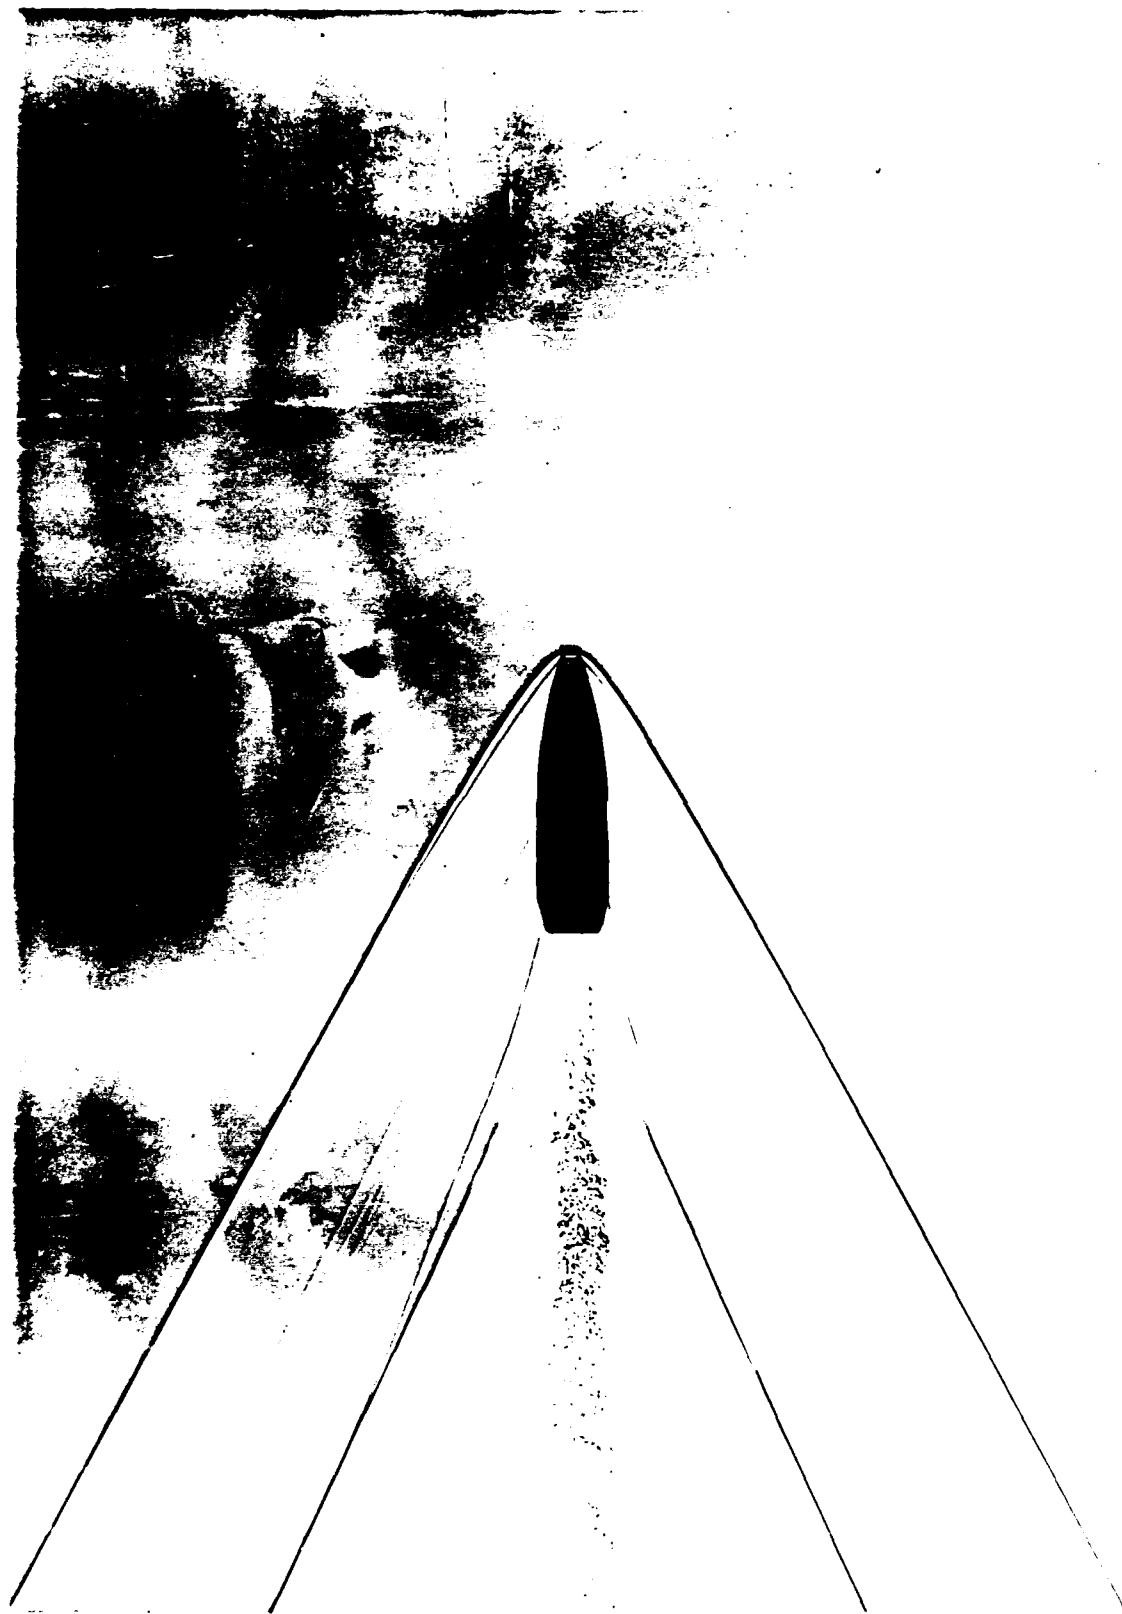


**Figure 8.** Shadowgraph of 168 Grain Sierra Bullet at Mach 2.2.

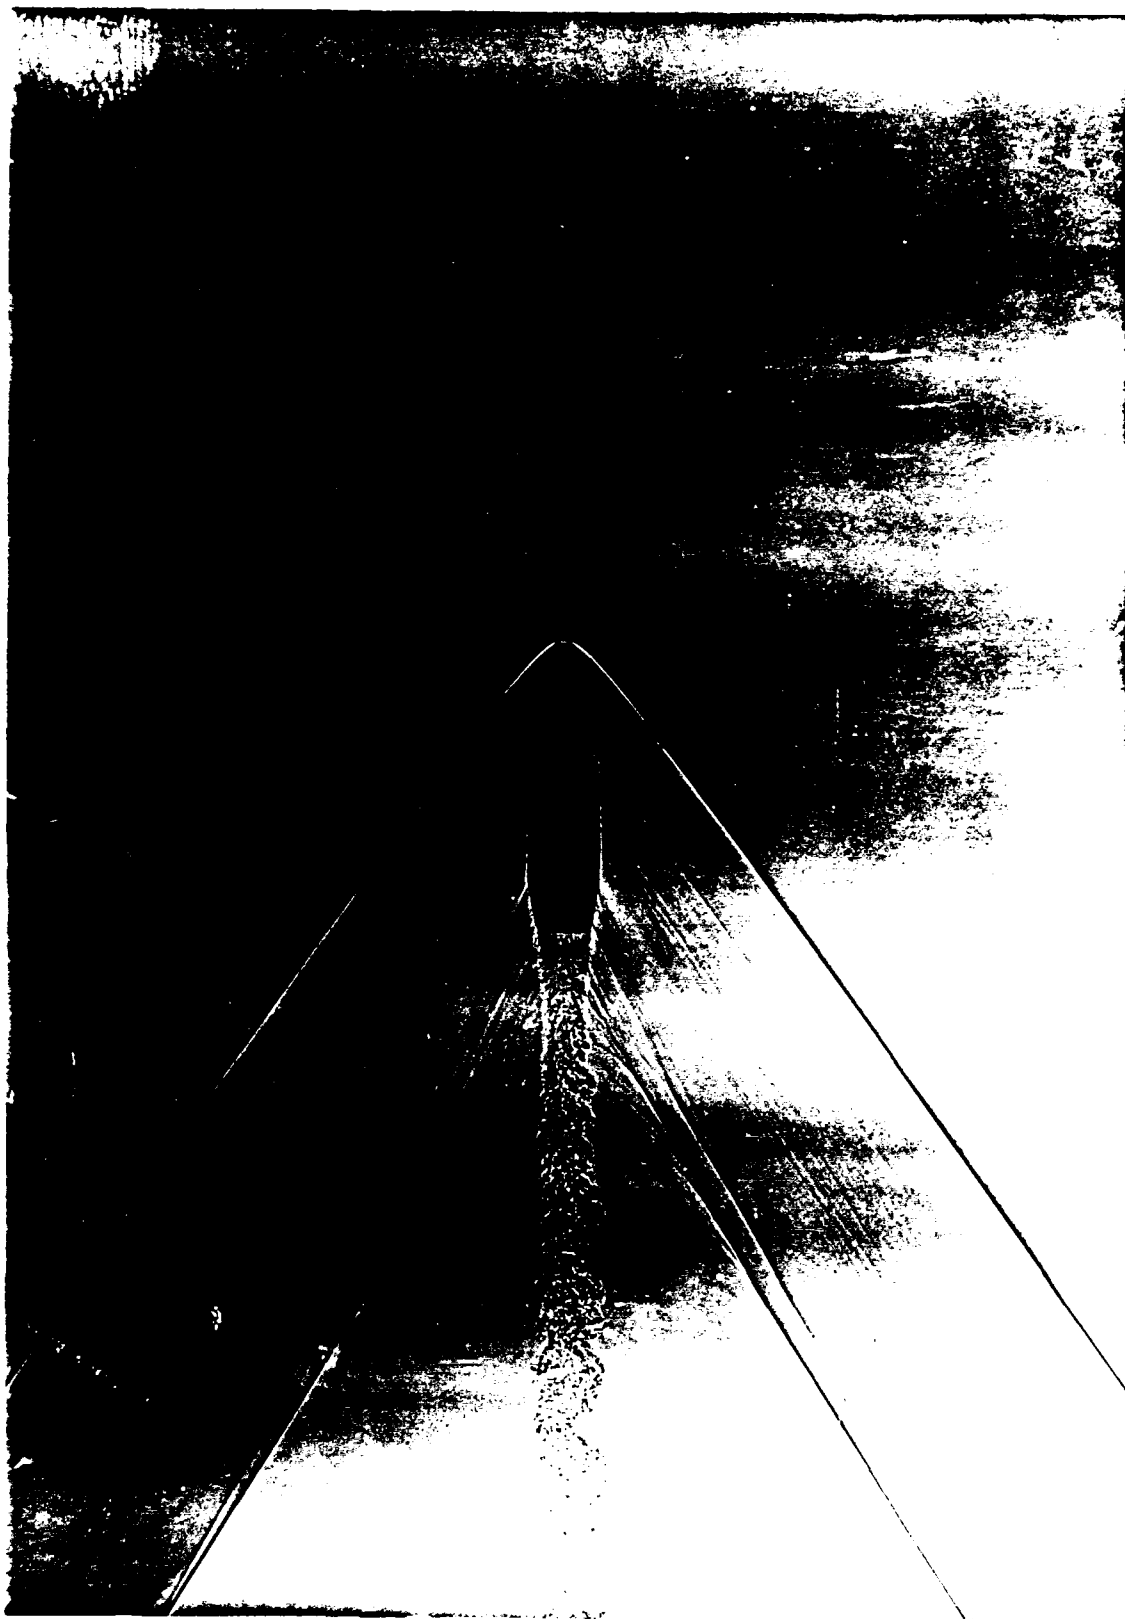

**Figure 9.** Shadowgraph of M118 Bullet at Mach 1.8.

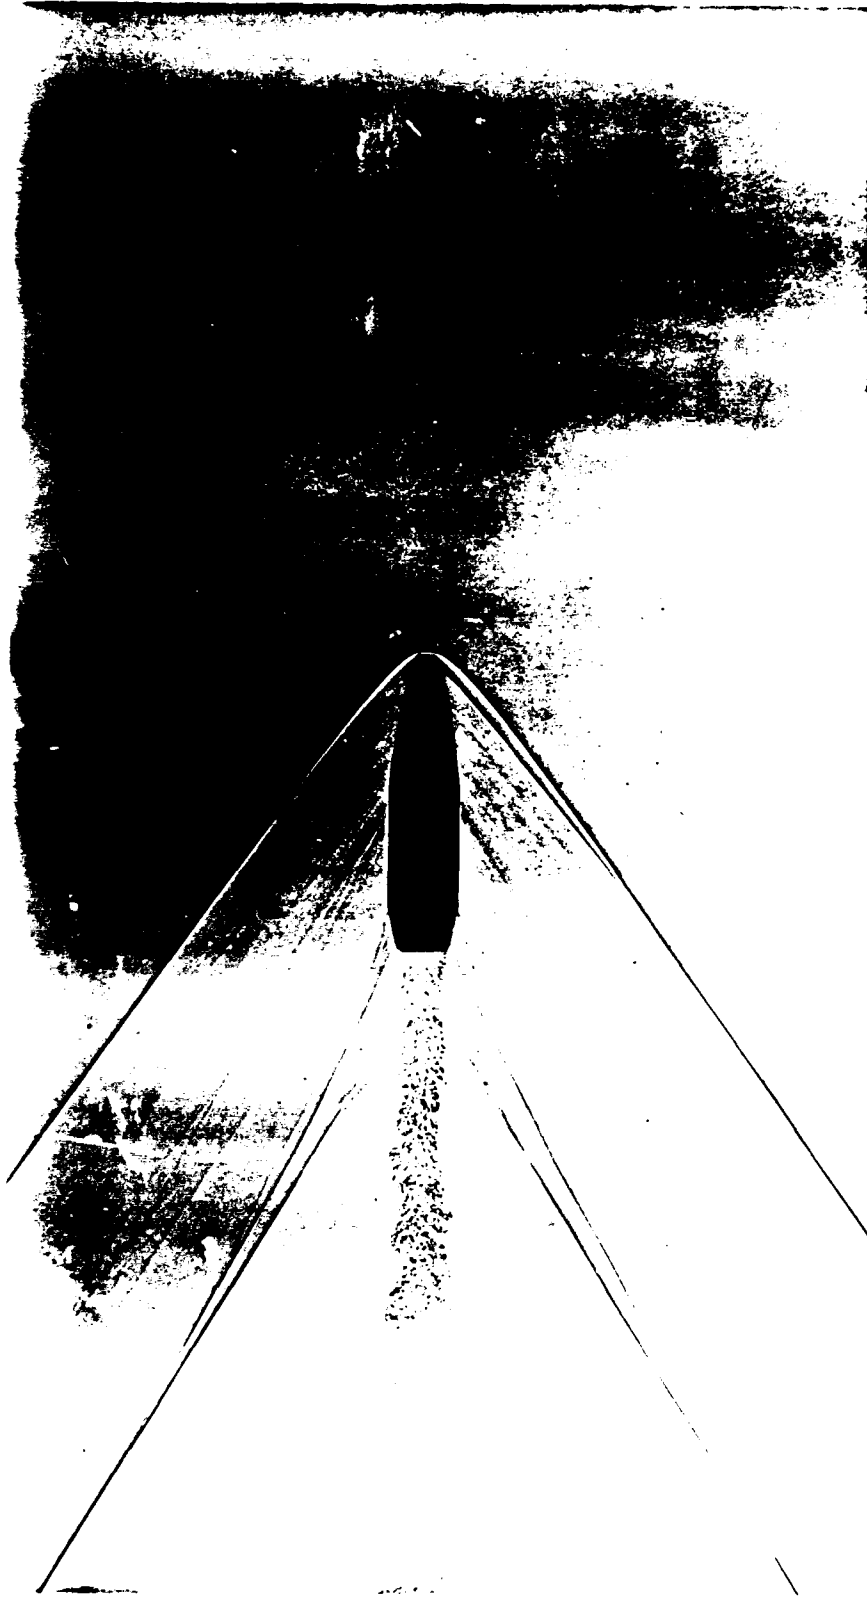

**Figure 10.** Shadowgraph of 190 Grain Sierra Bullet at Mach 1.8.

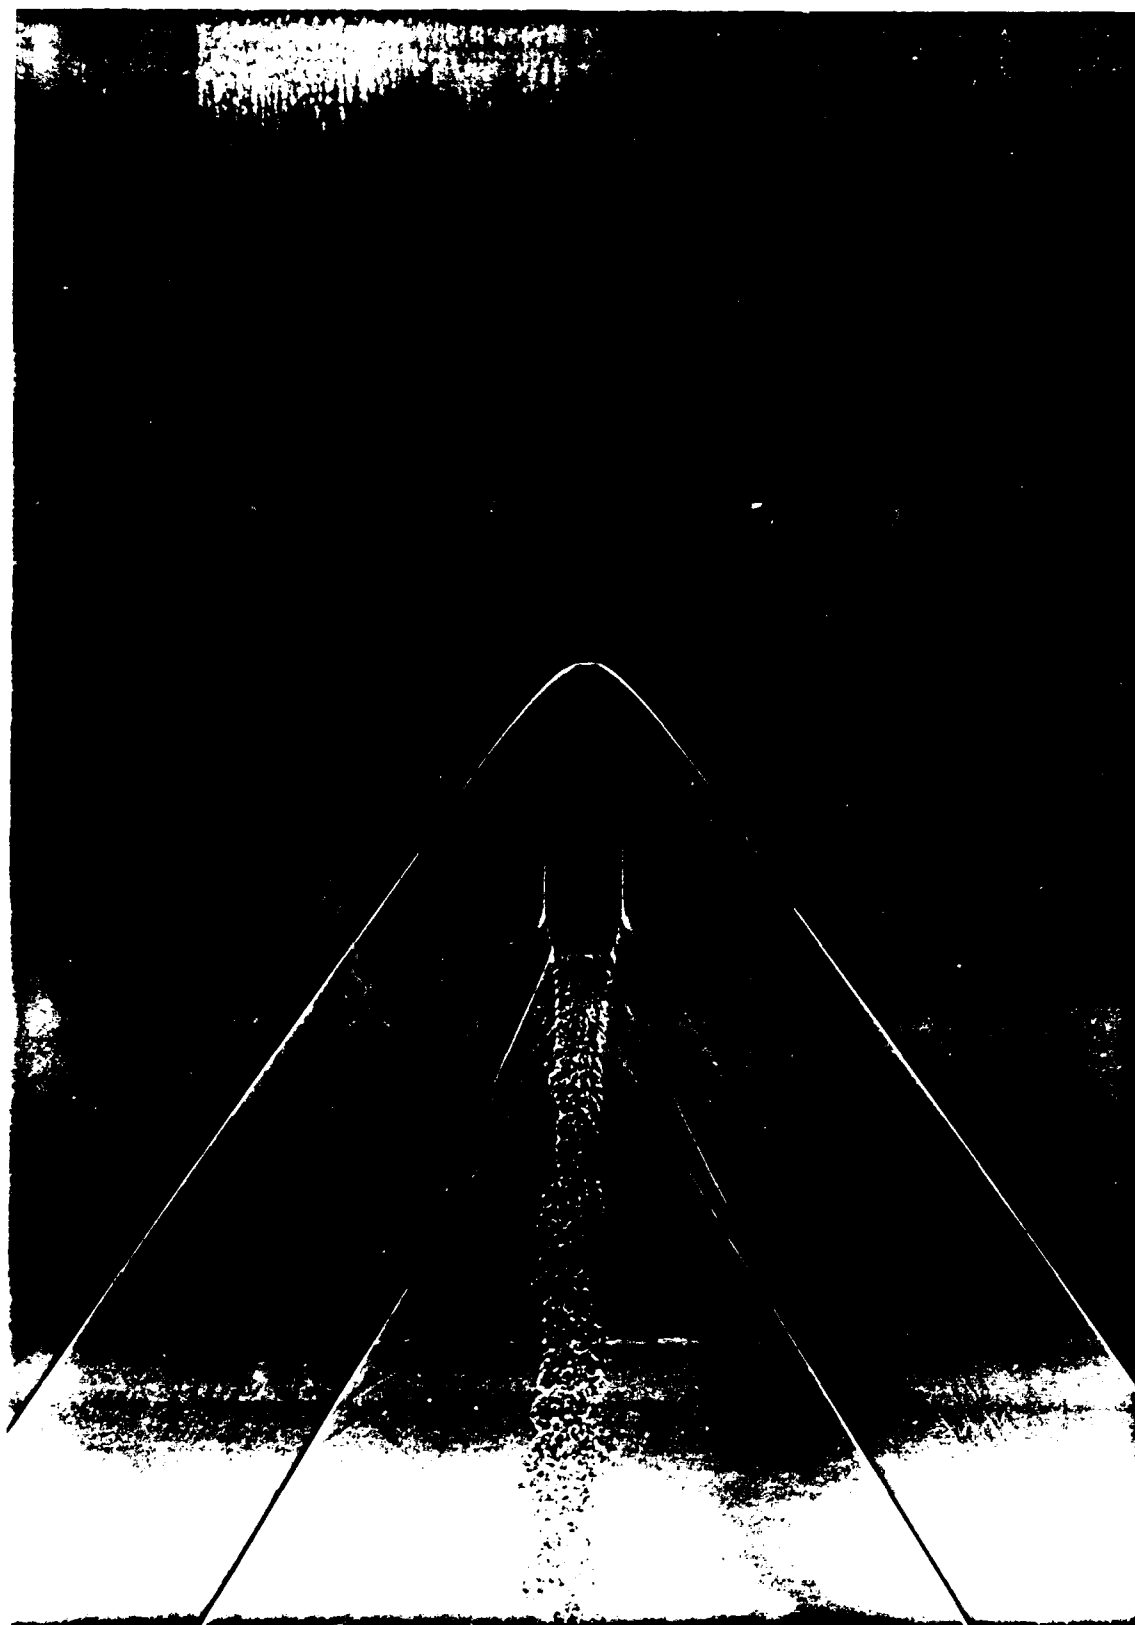

**Figure 11.** Shadowgraph of 168 Grain Sierra Bullet at Mach 1.8.

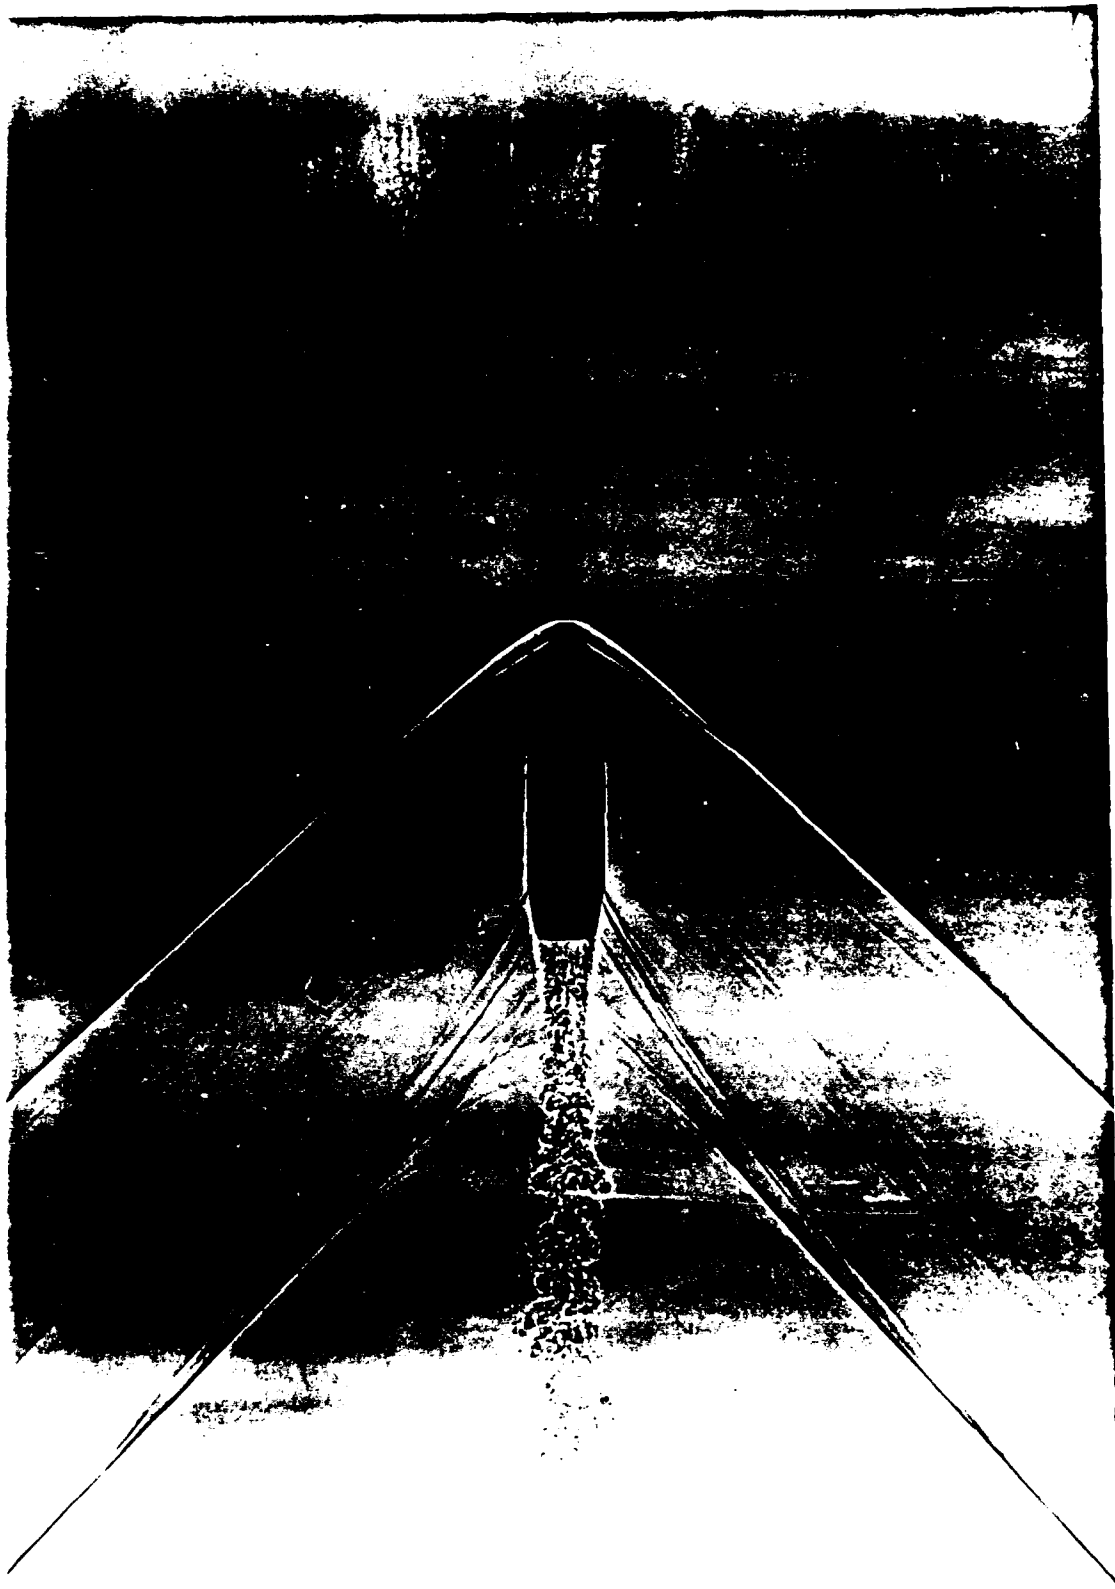


Figure 12. Shadowgraph of M118 Bullet at Mach 1.4.

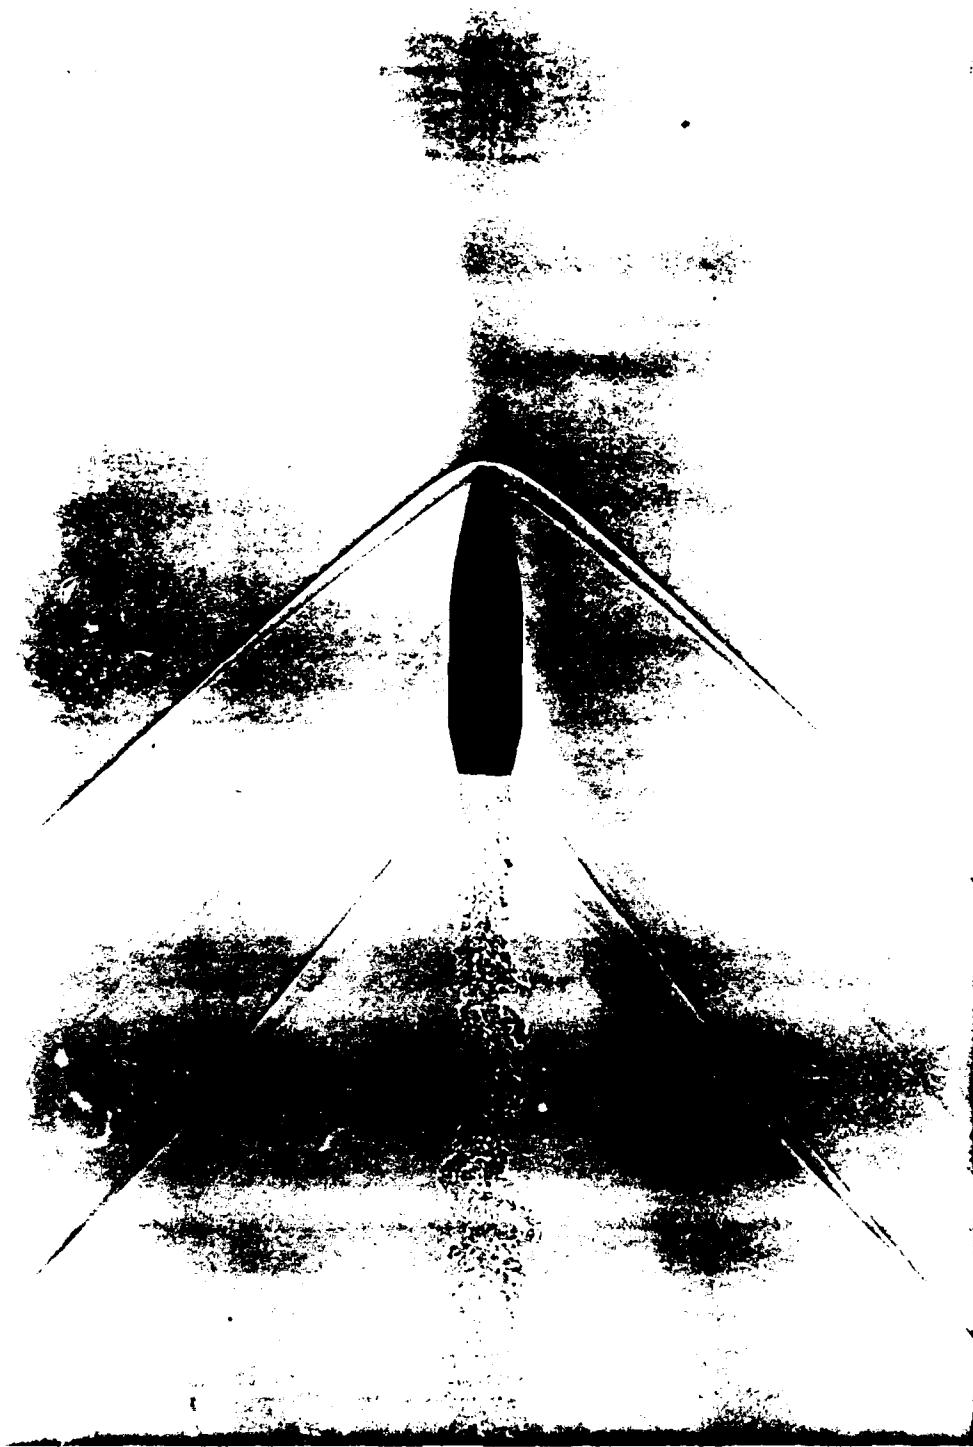


Figure 13. Shadowgraph of 190 Grain Sierra Bullet at Mach 1.4.



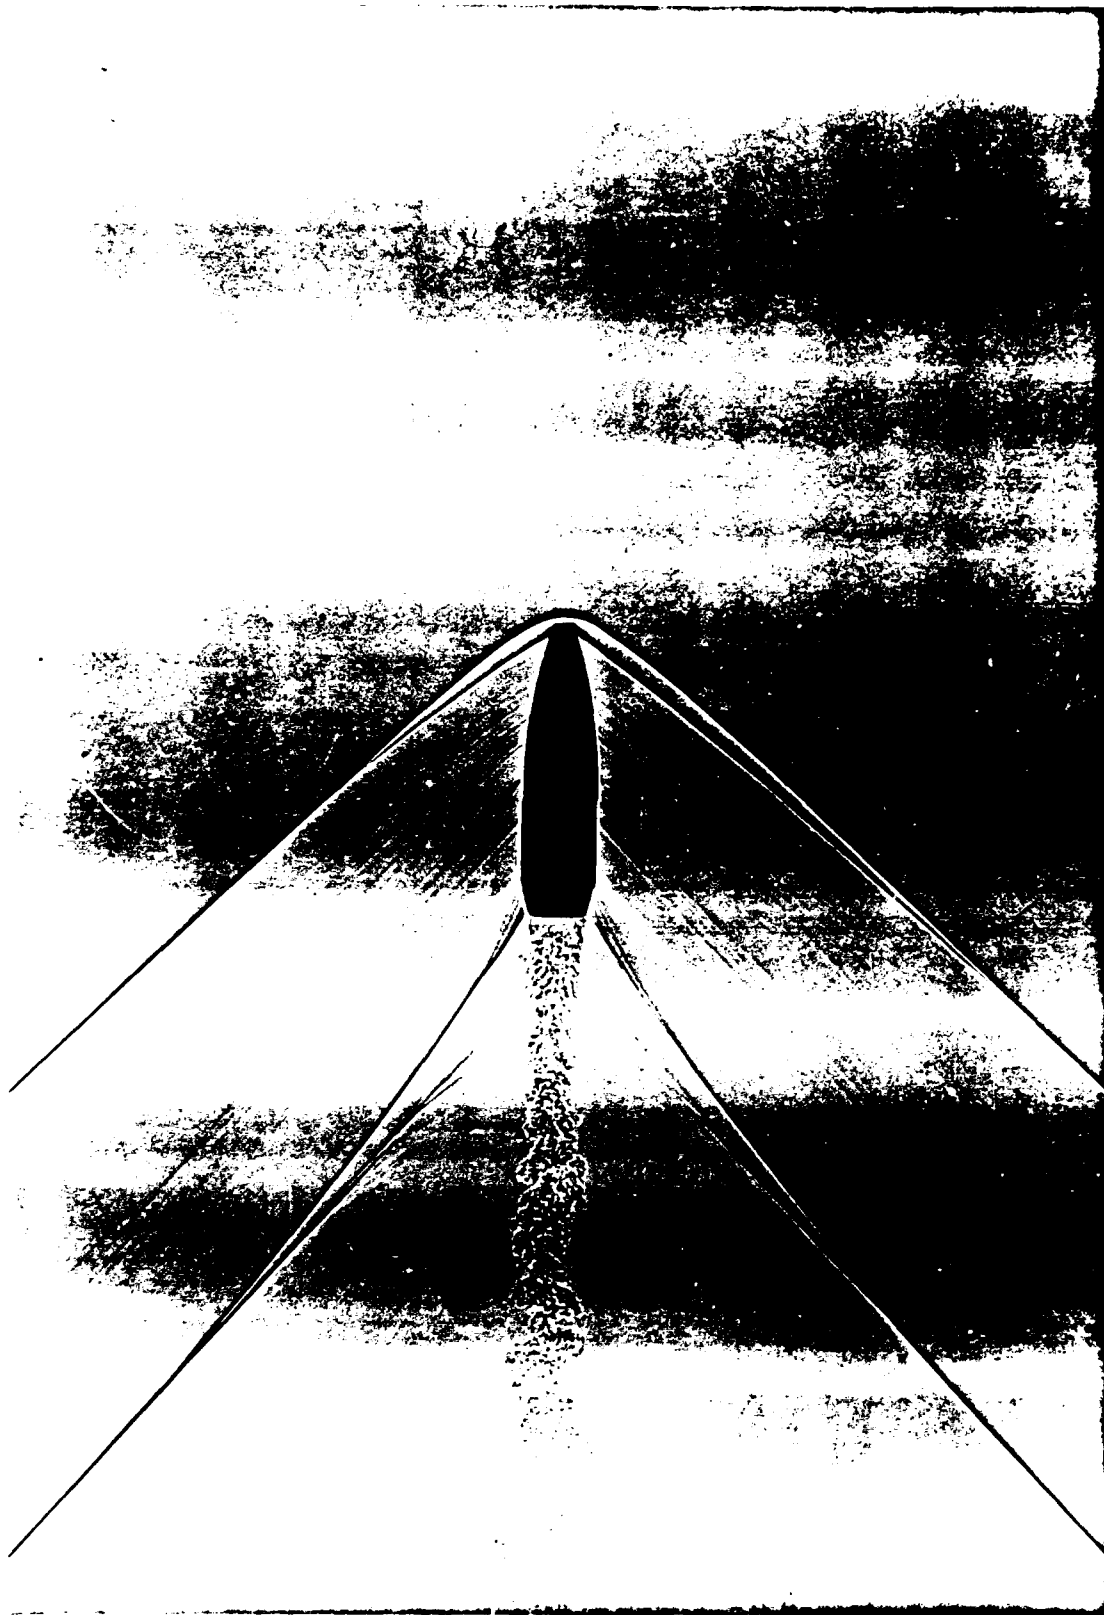



Figure 14. Shadowgraph of 168 Grain Sierra Bullet at Mach 1.4.

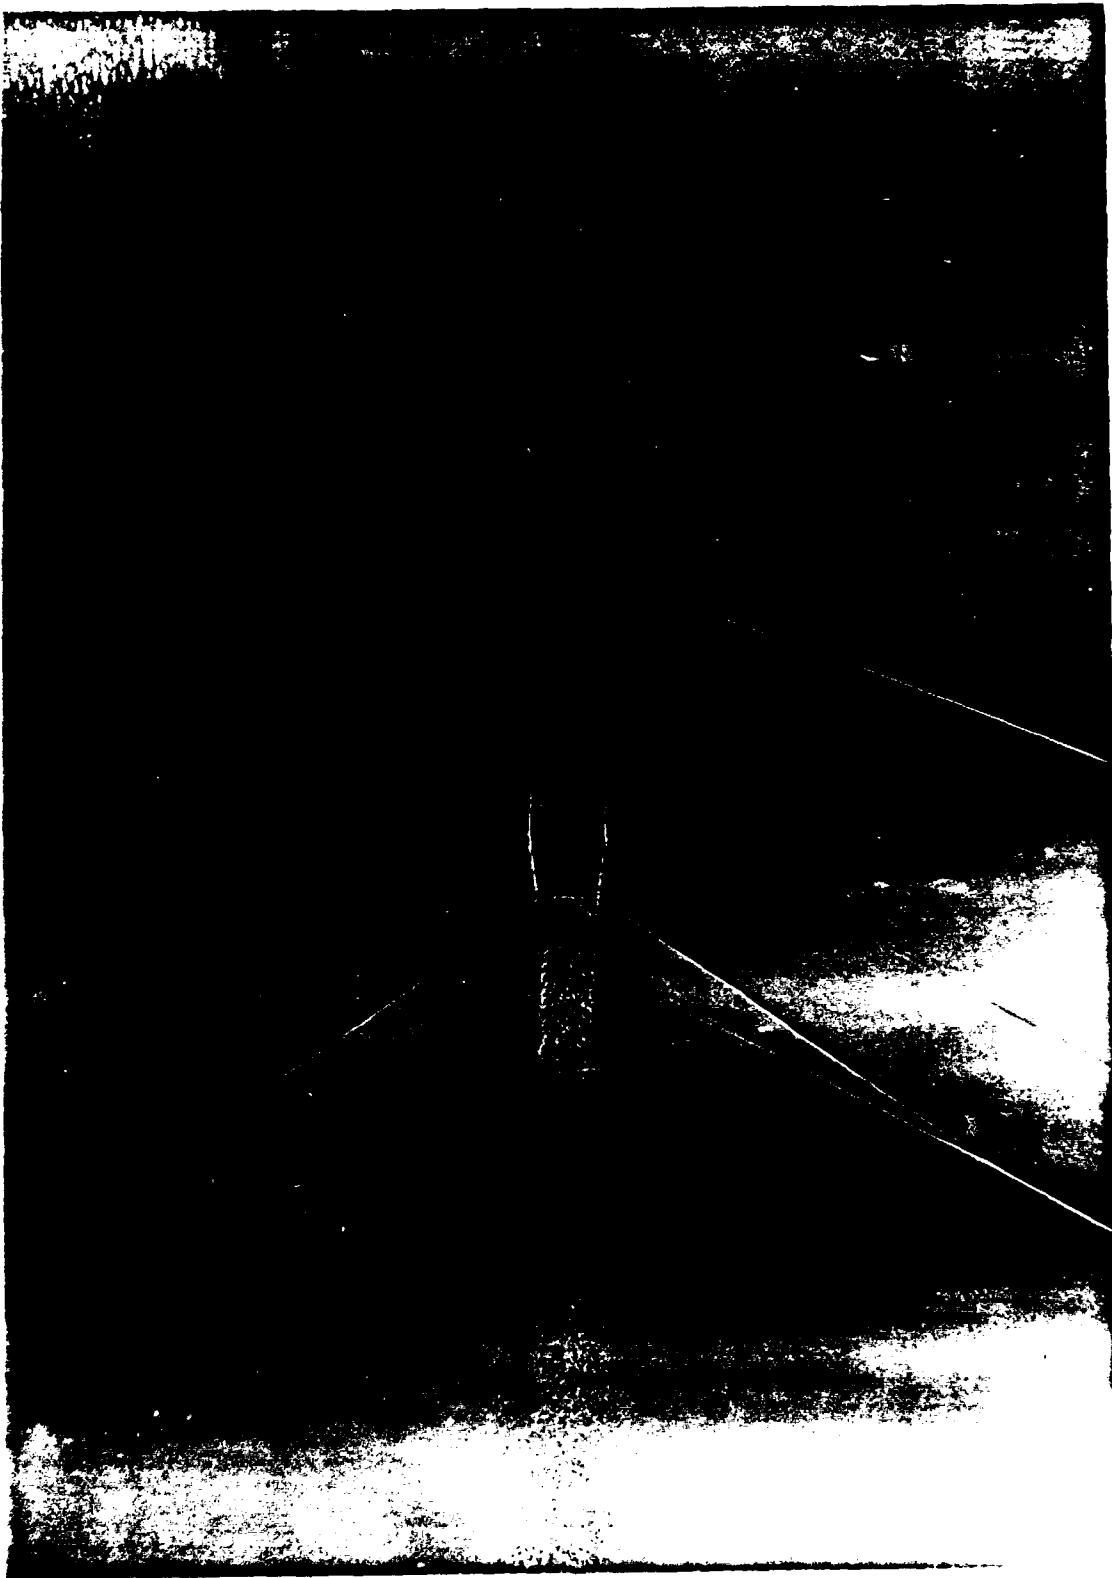

**Figure 15.** Shadowgraph of M118 Bullet at Mach 1.1.

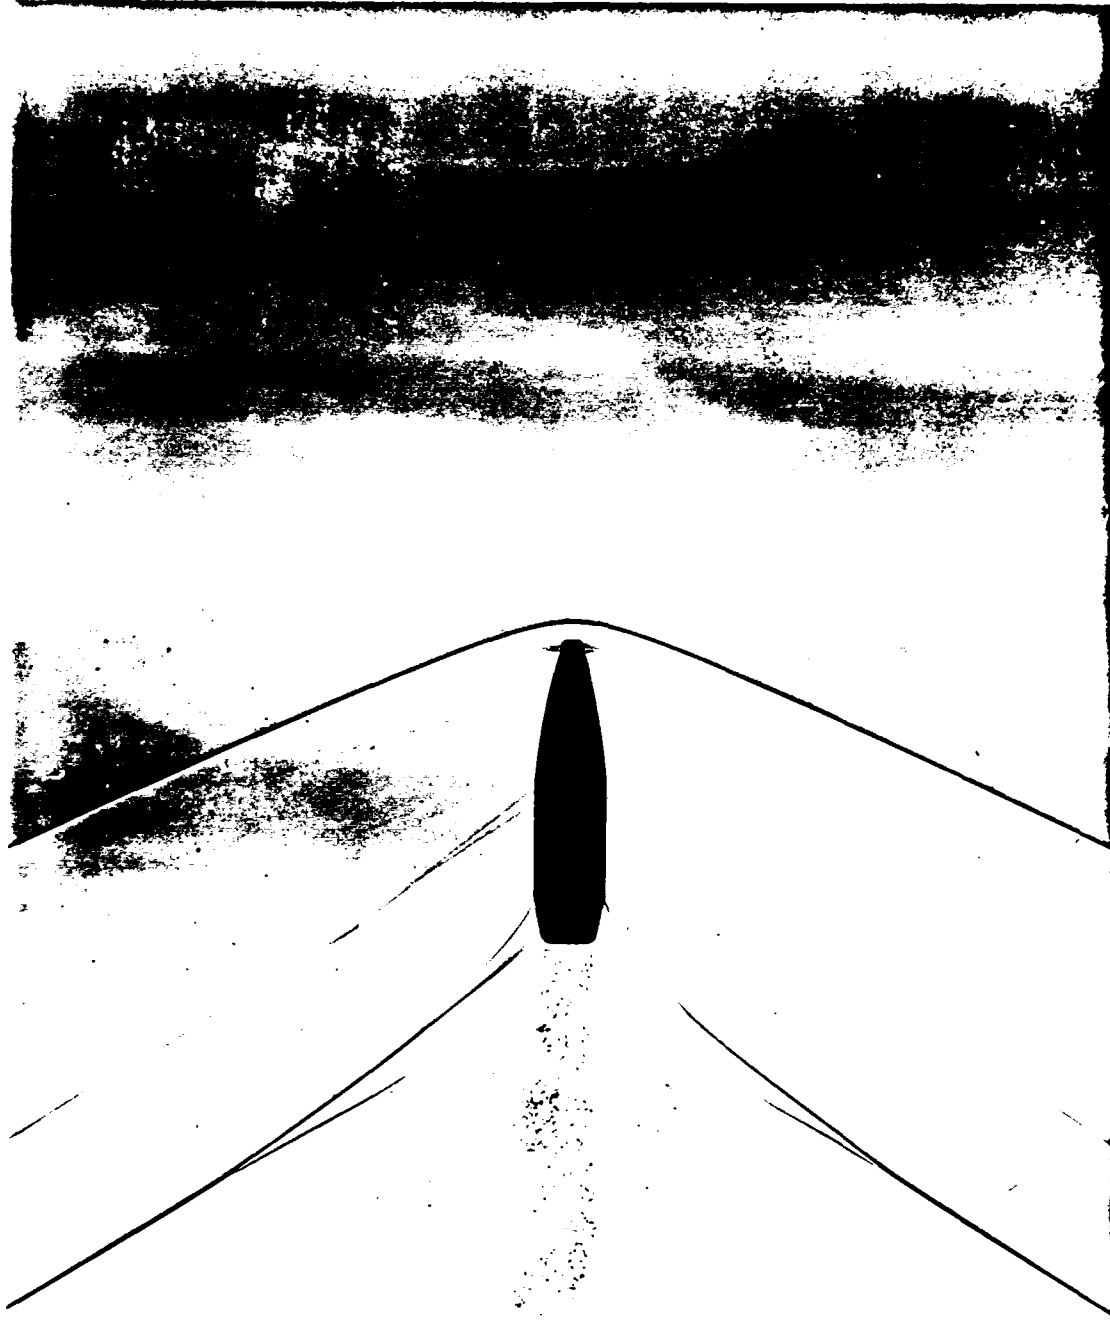

**Figure 16.** Shadowgraph of 190 Grain Sierra Bullet at Mach 1.1.

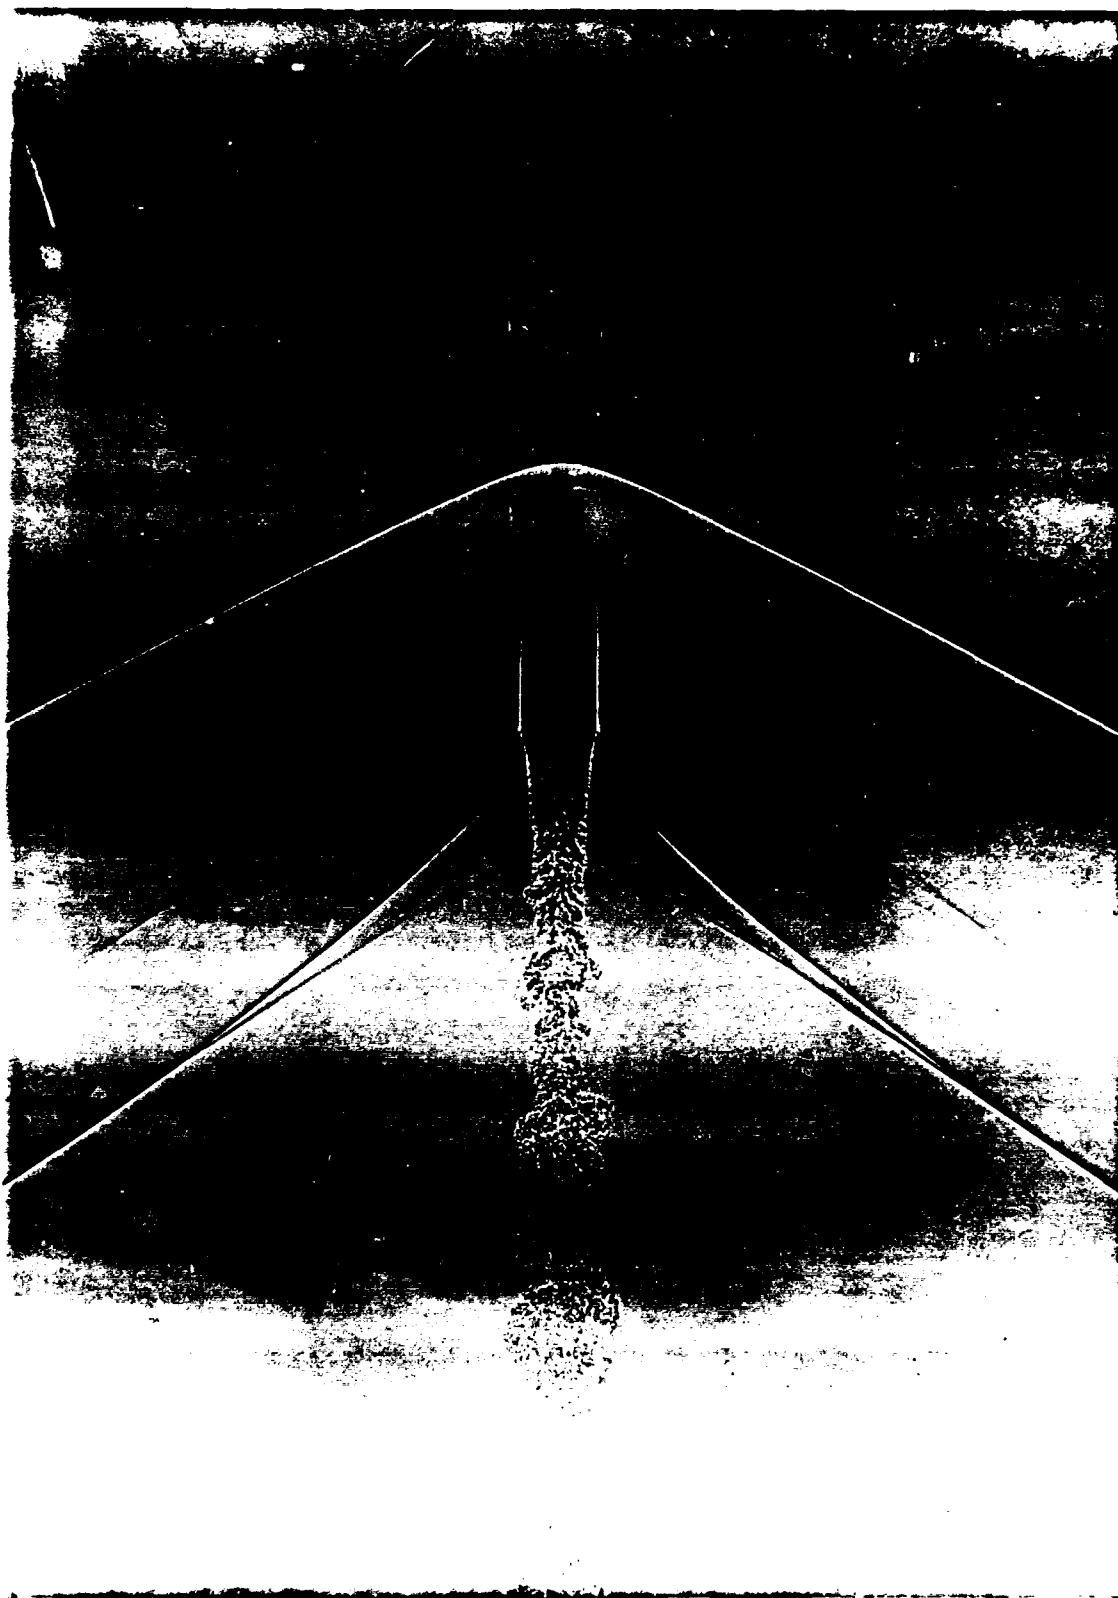

**Figure 17.** Shadowgraph of 168 Grain Sierra Bullet at Mach 1.1.

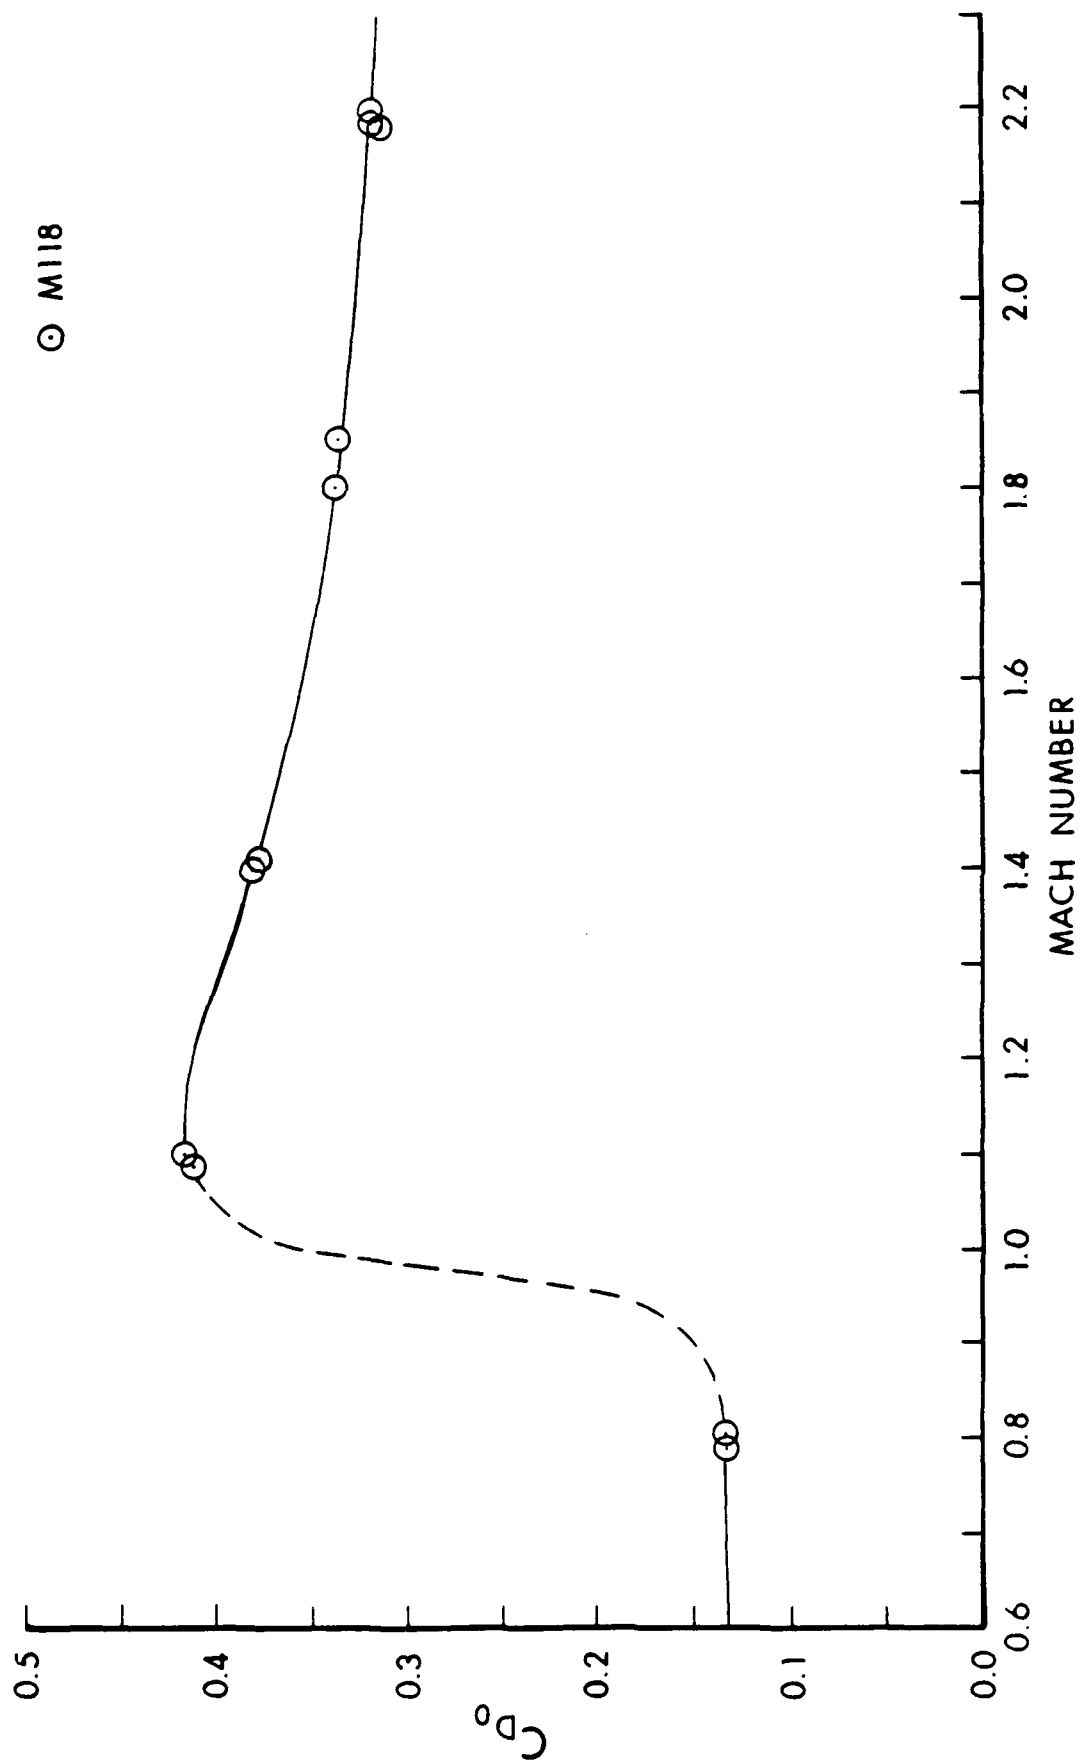


Figure 18. Zero-Yaw Drag Force Coefficient versus Mach Number, M118 Bullet.



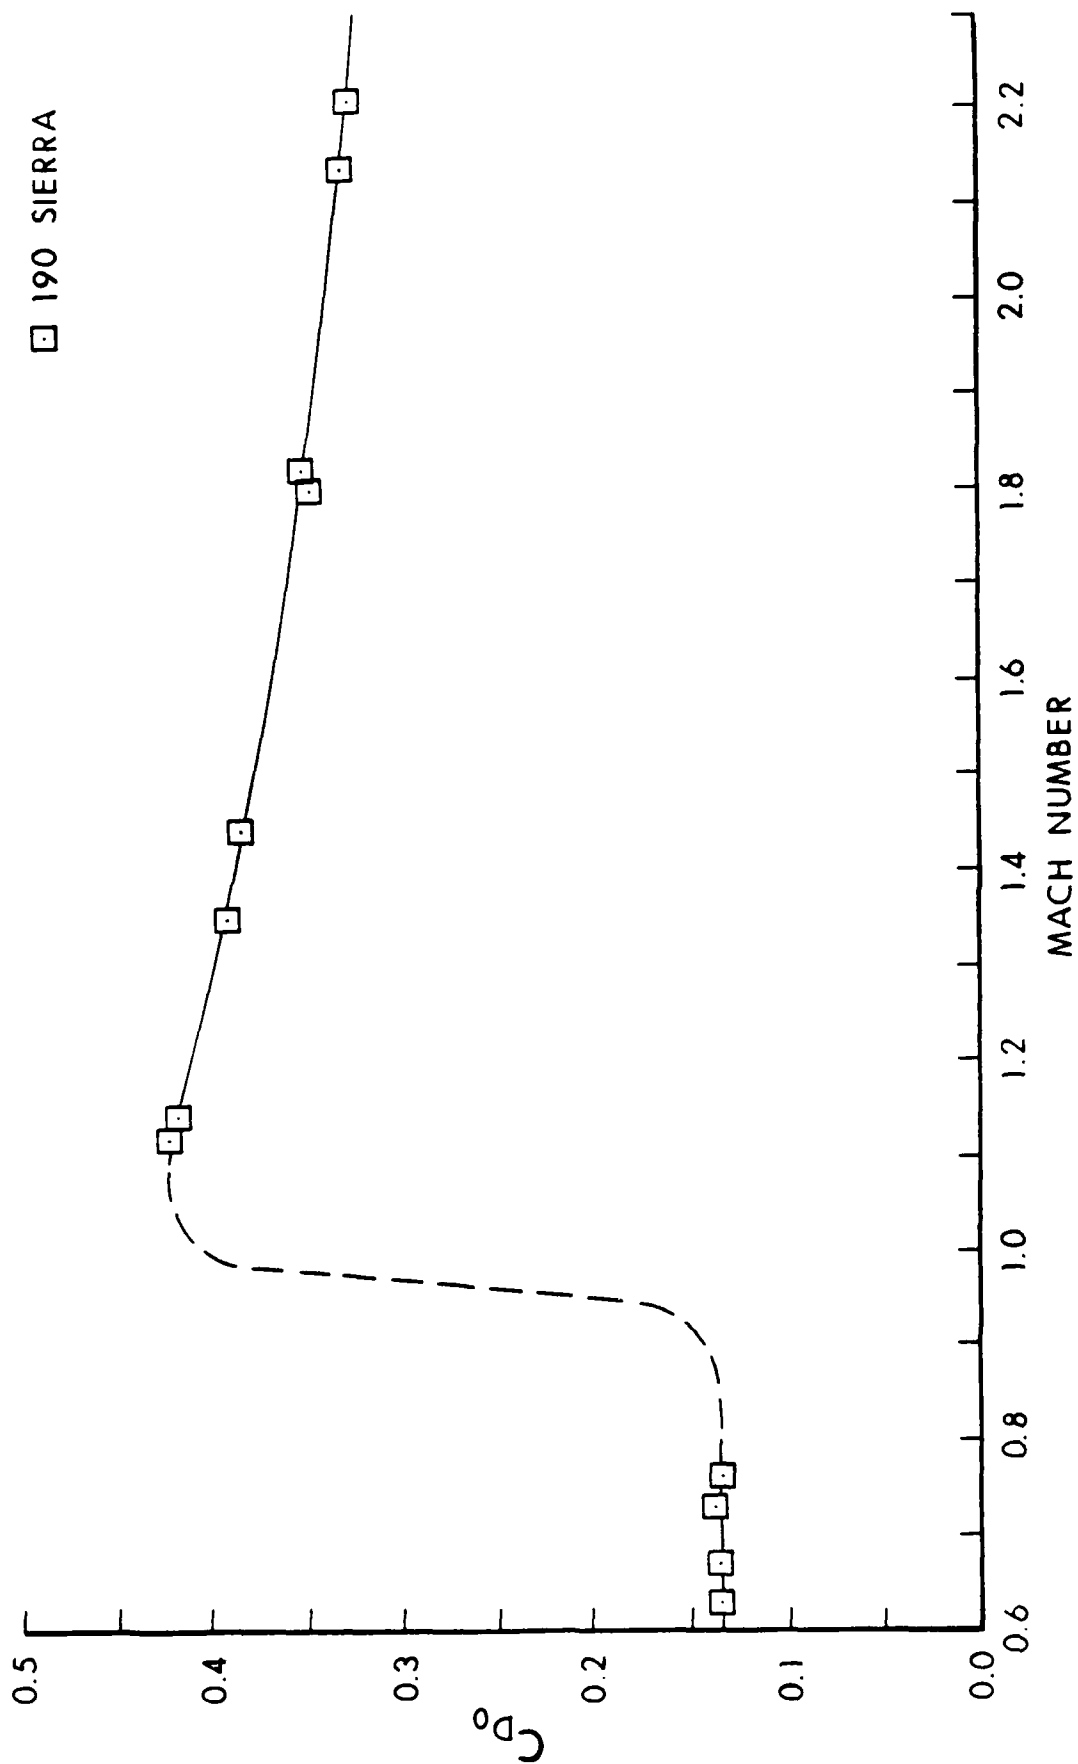


Figure 19. Zero-Yaw Drag Force Coefficient versus Mach Number, 190 Grain Sierra Bullet.

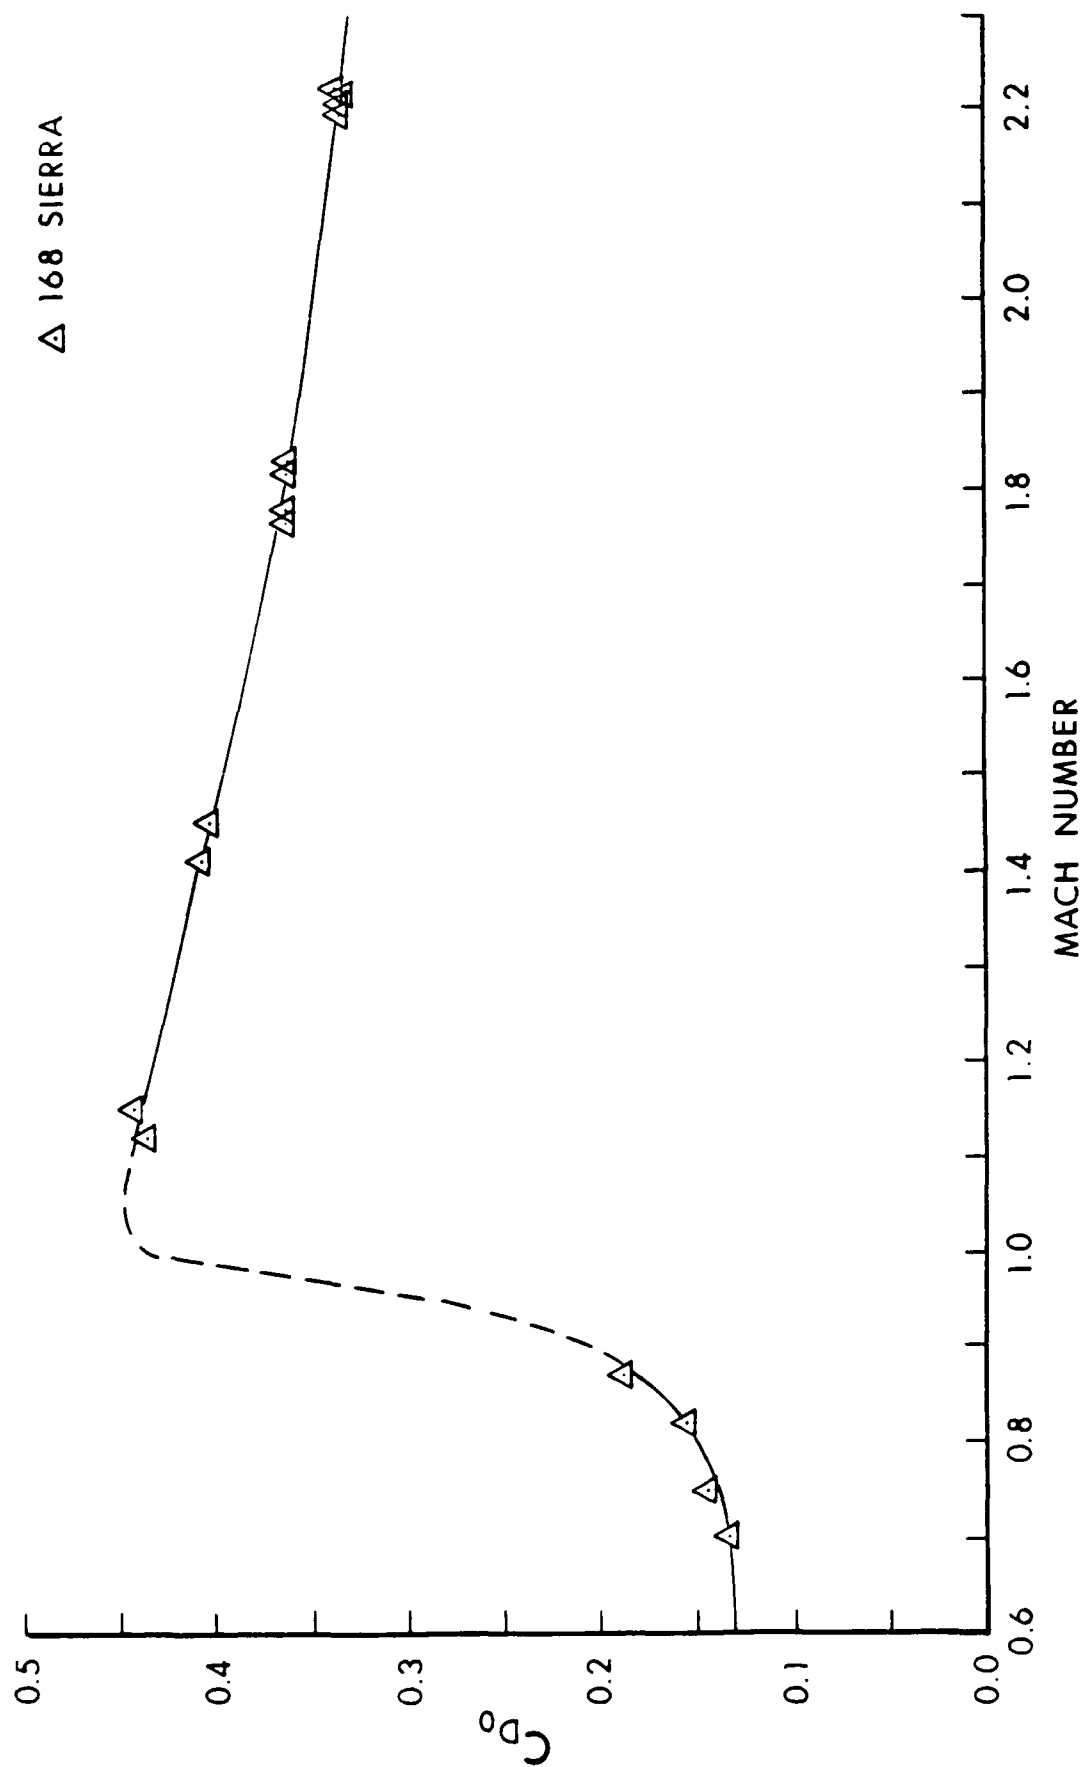

**Figure 20.** Zero-Yaw Drag Force Coefficient versus Mach Number, 168 Grain Sierra Bullet.

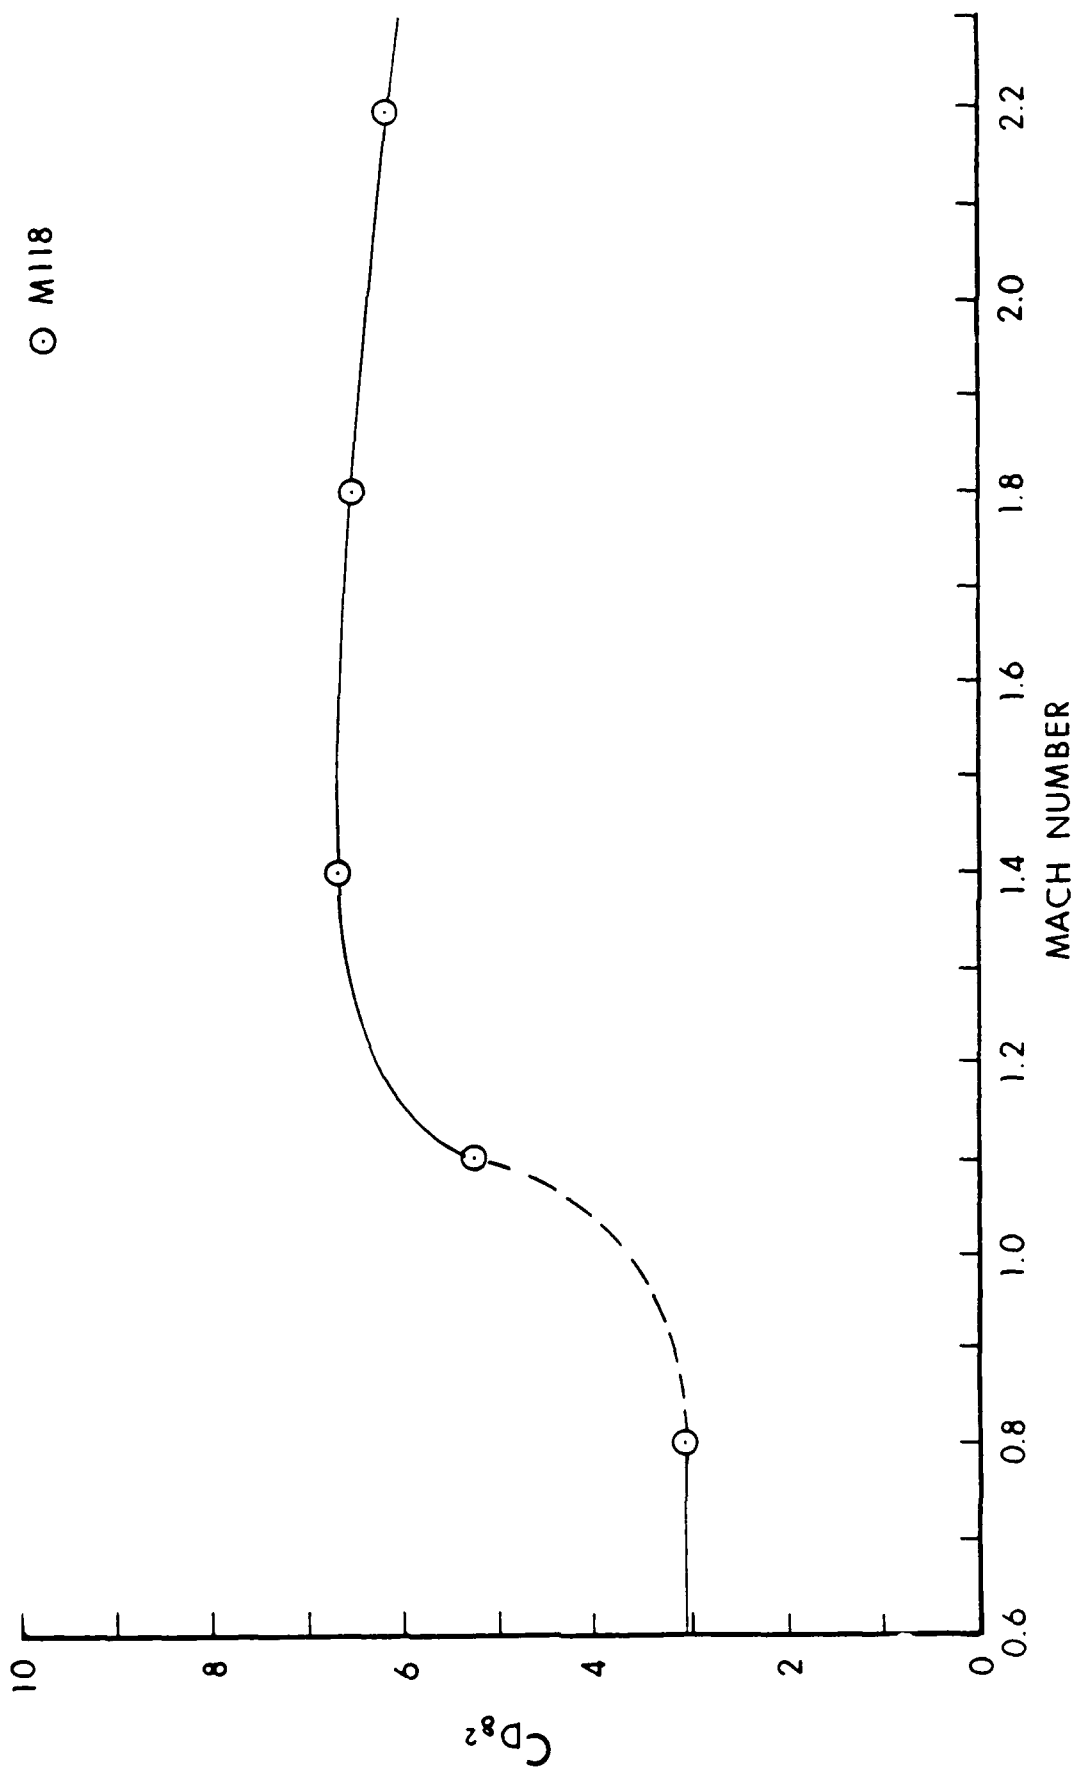

**Figure 21.** Yaw Drag Force Coefficient versus Mach Number, M118 Bullet.

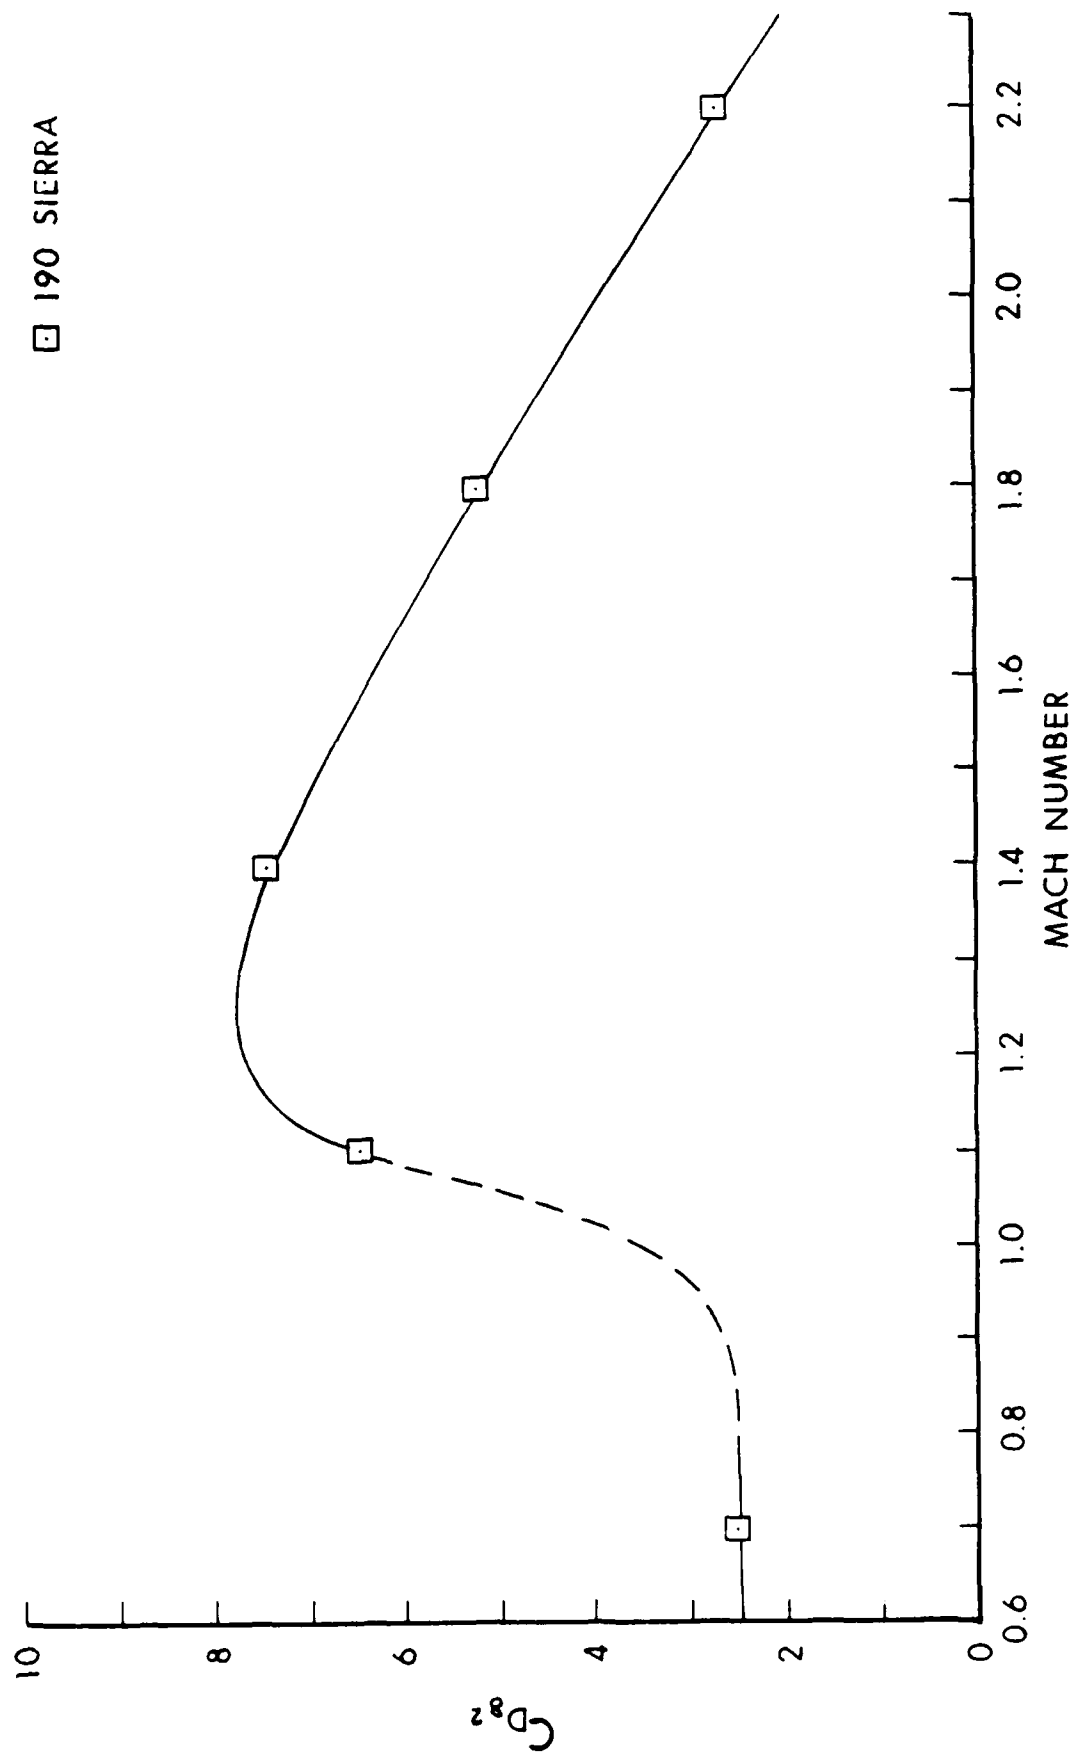


Figure 22. Yaw Drag Force Coefficient versus Mach Number, 190 Grain Sierra Bullet

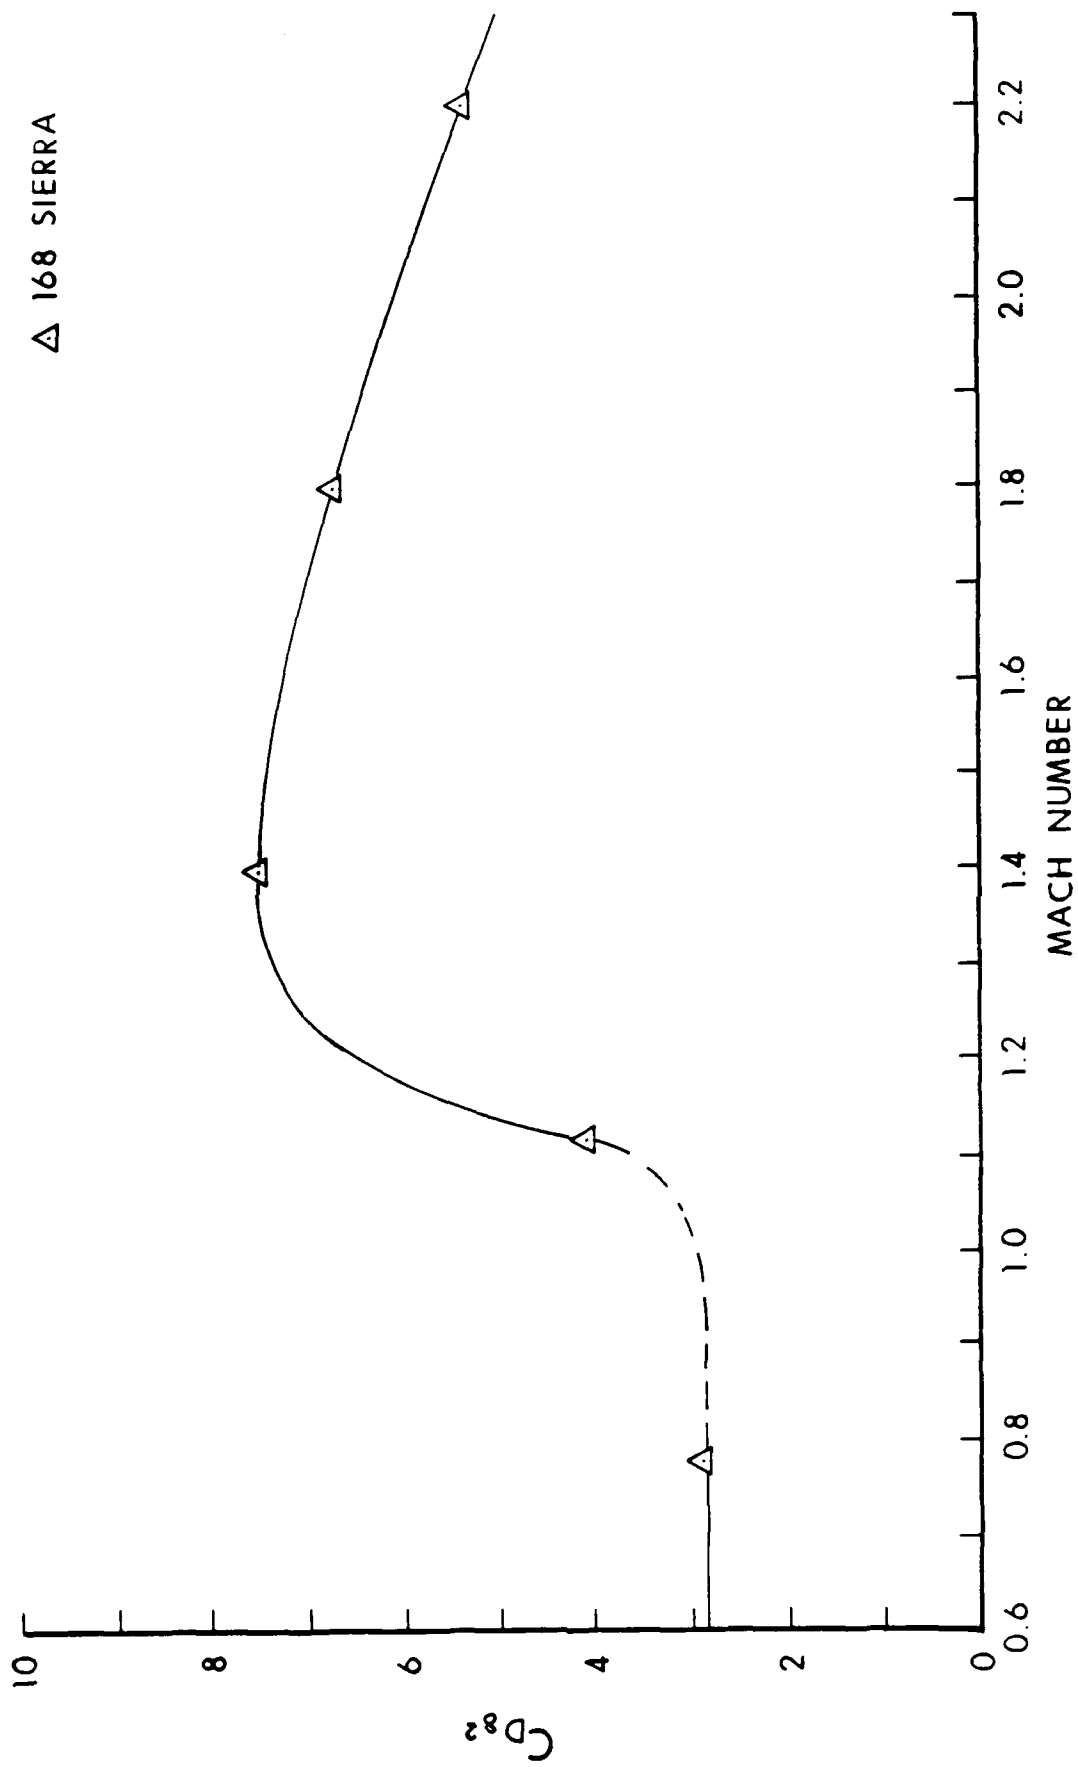


Figure 23. Yaw Drag Force Coefficient versus Mach Number, 168 Grain Sierra Bullet

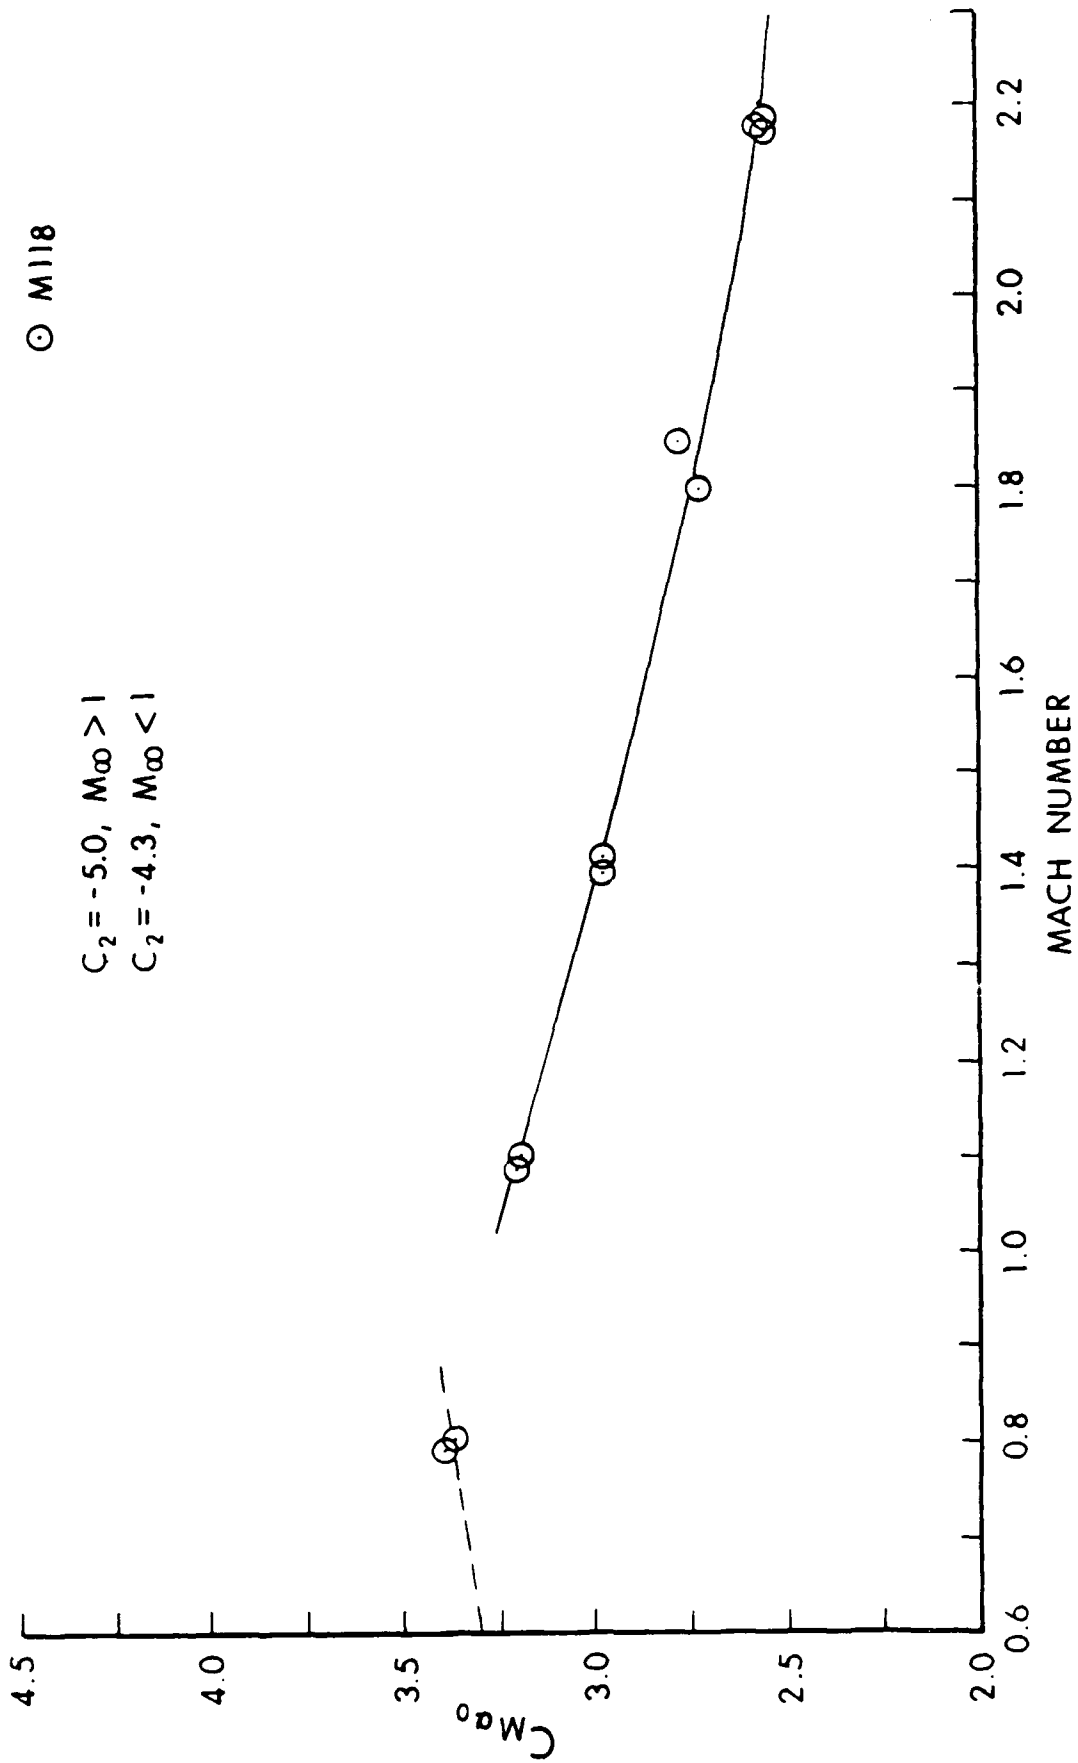


Figure 24. Zero-Yaw Overturning Moment Coefficient versus Mach Number, M118 Bullet.

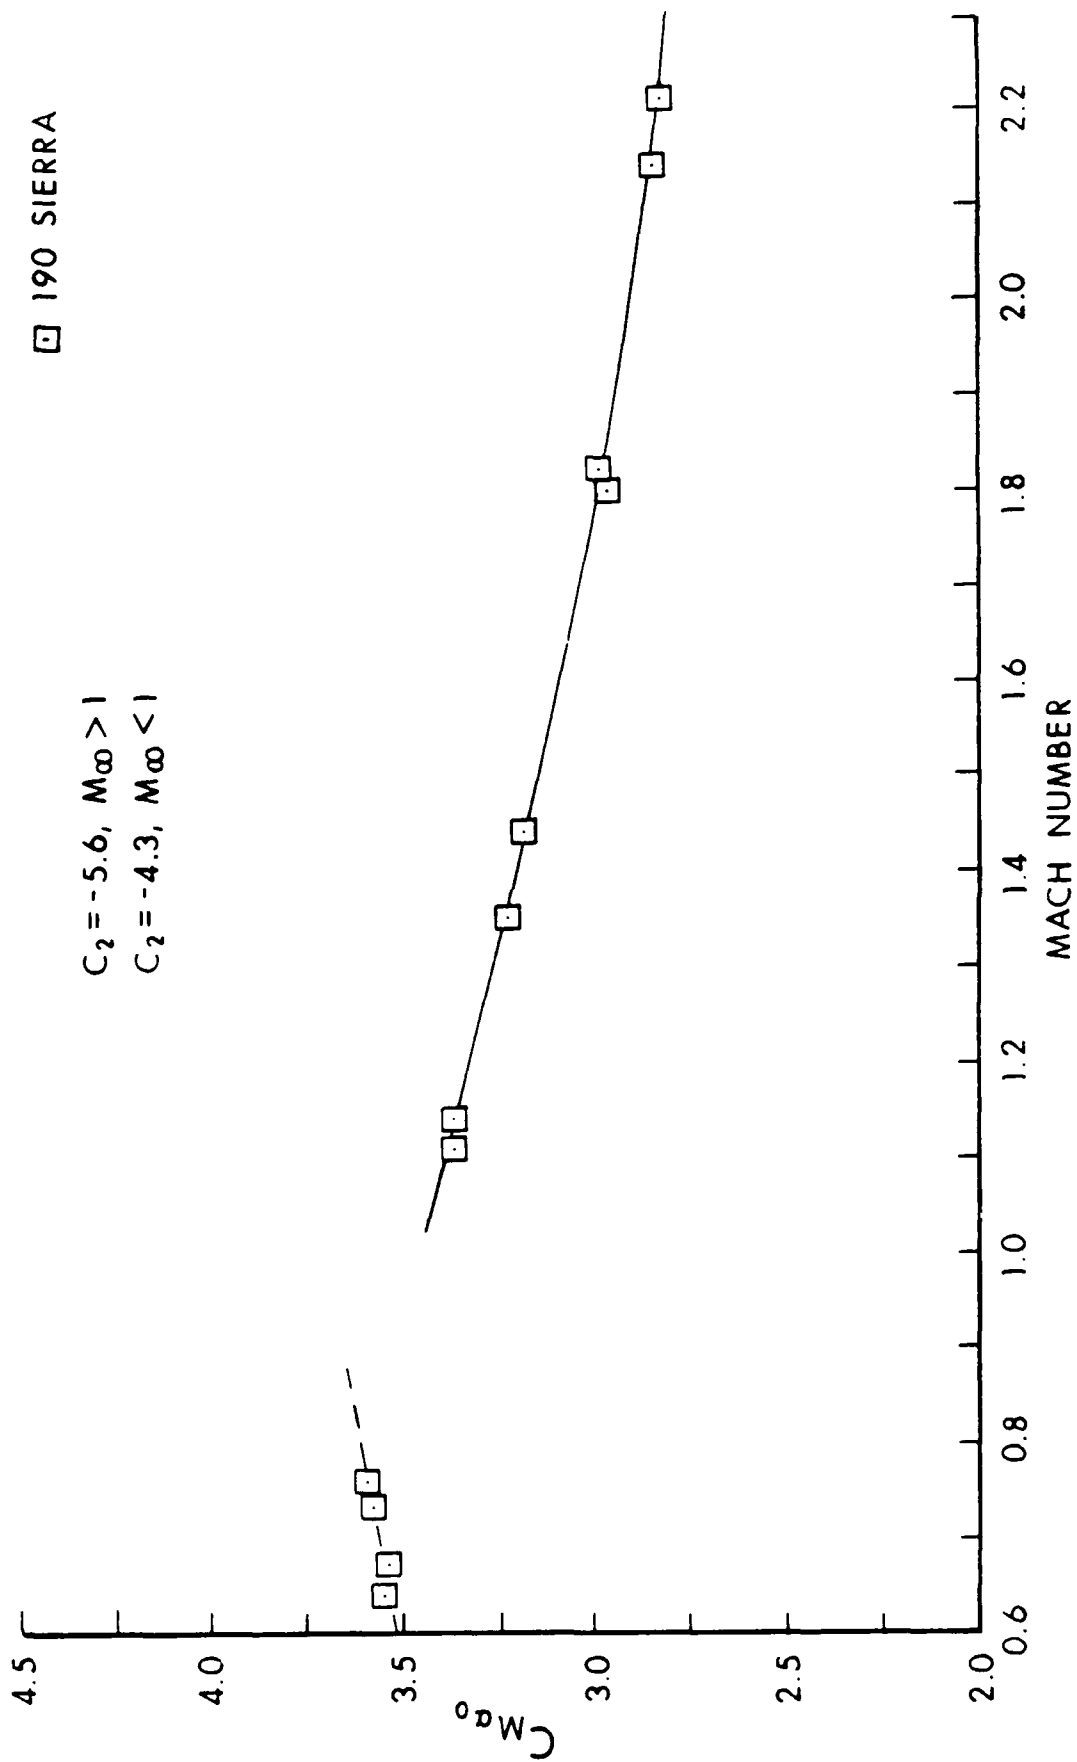


Figure 25. Zero-Yaw Overturning Moment Coefficient versus Mach Number, 190 Grain Sierra Bullet.

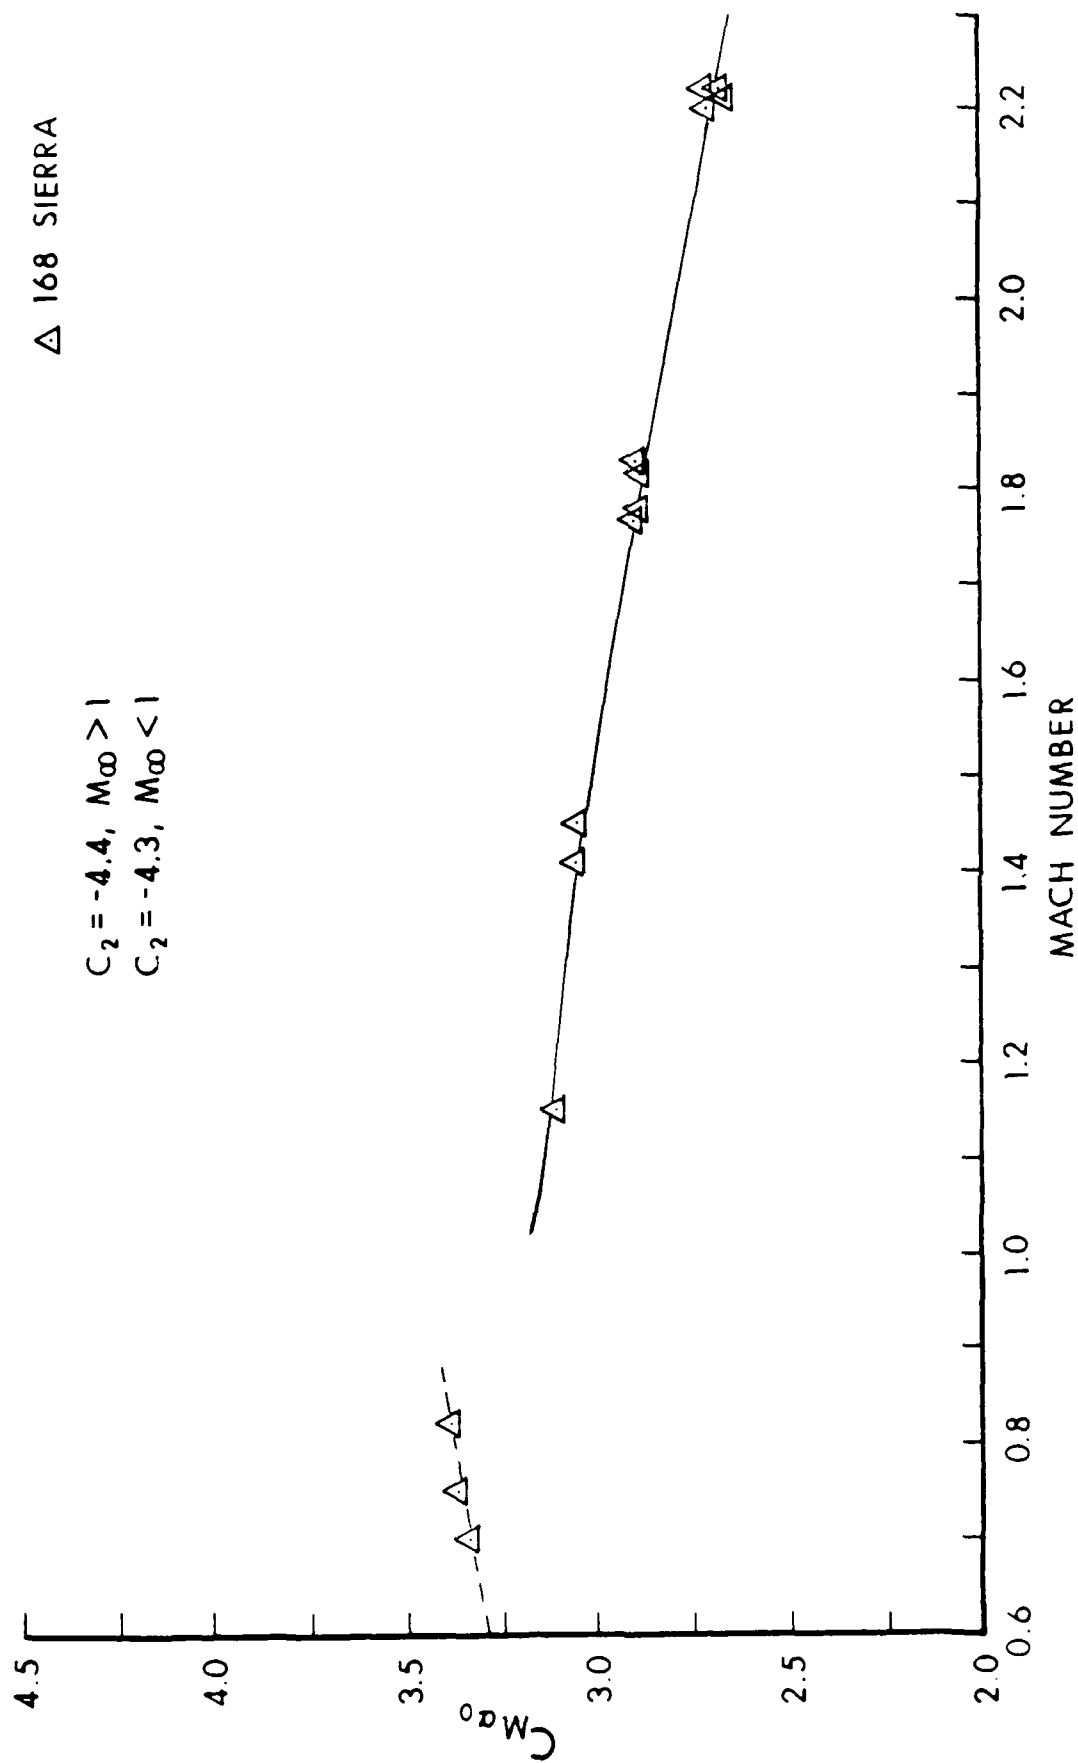


Figure 26. Zero-Yaw Overturning Moment Coefficient versus Mach Number, 168 Grain Sierra Bullet.

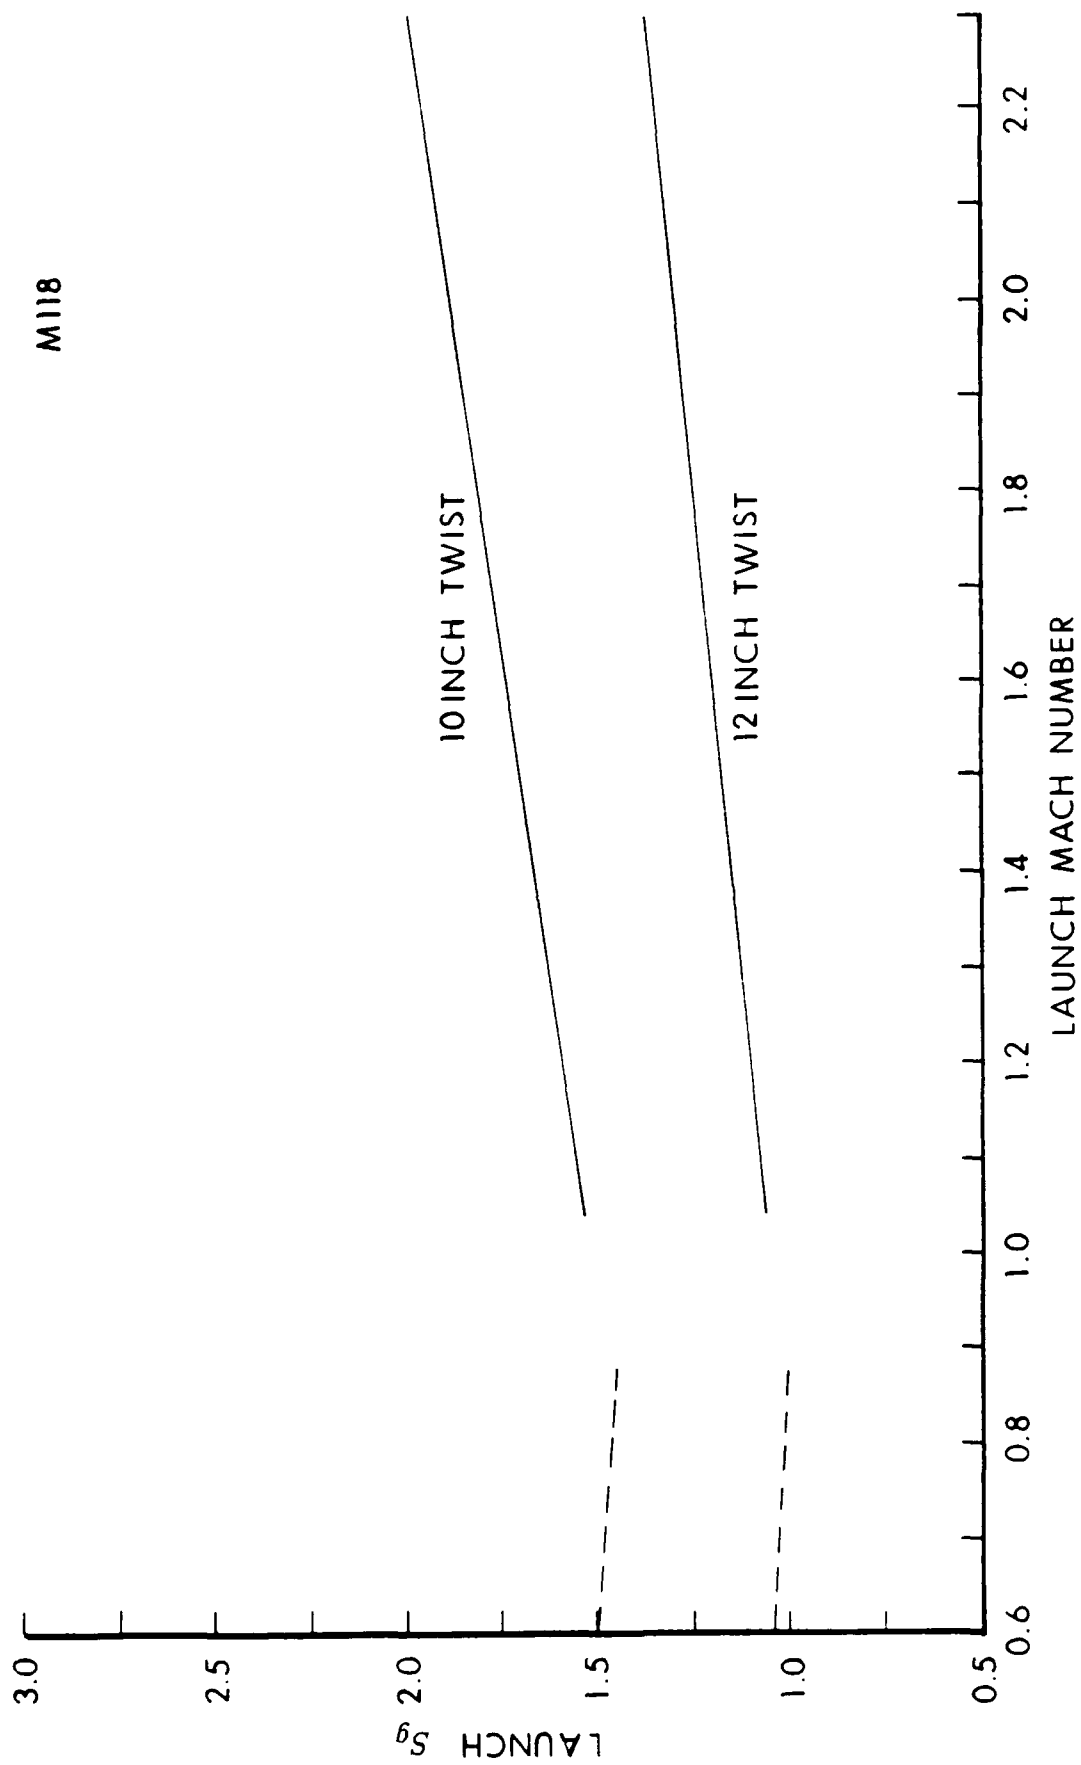


Figure 27. Gyroscopic Stability Factor versus Mach Number, M118 Bullet.

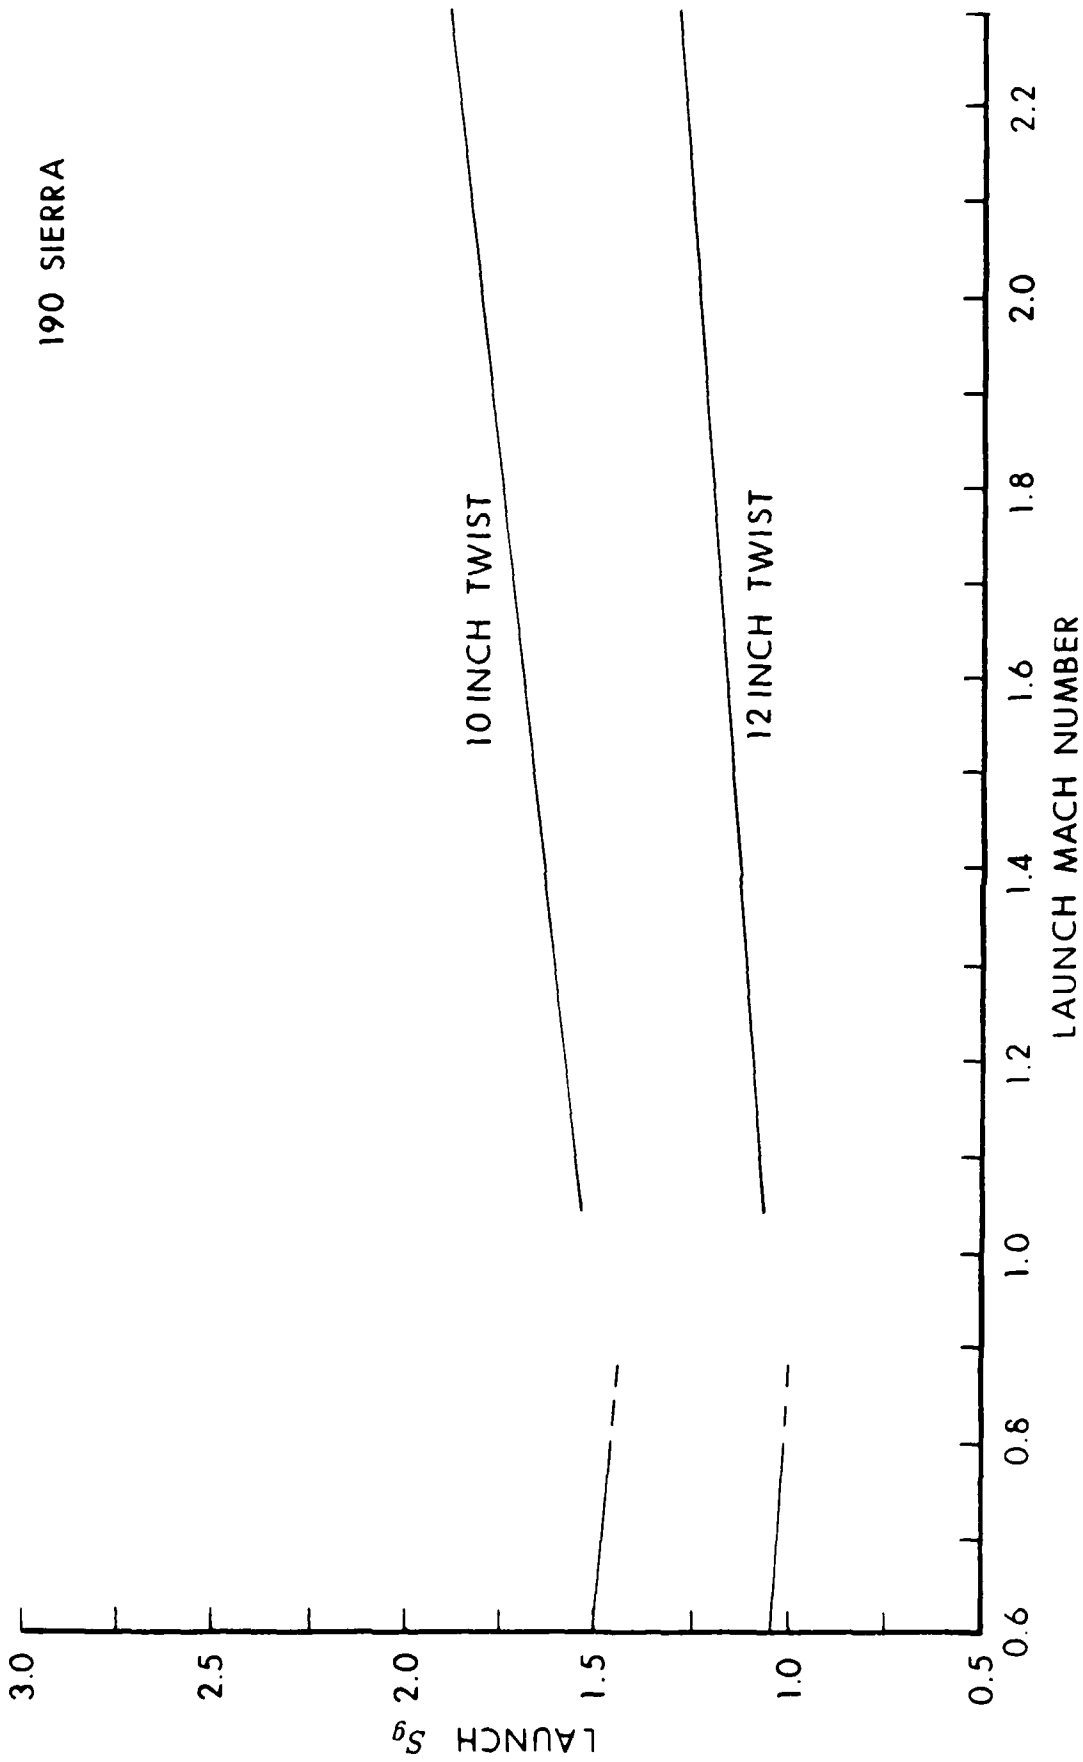


Figure 28. Gyroscopic Stability Factor versus Mach Number, 190 Grain Sierra Bullet

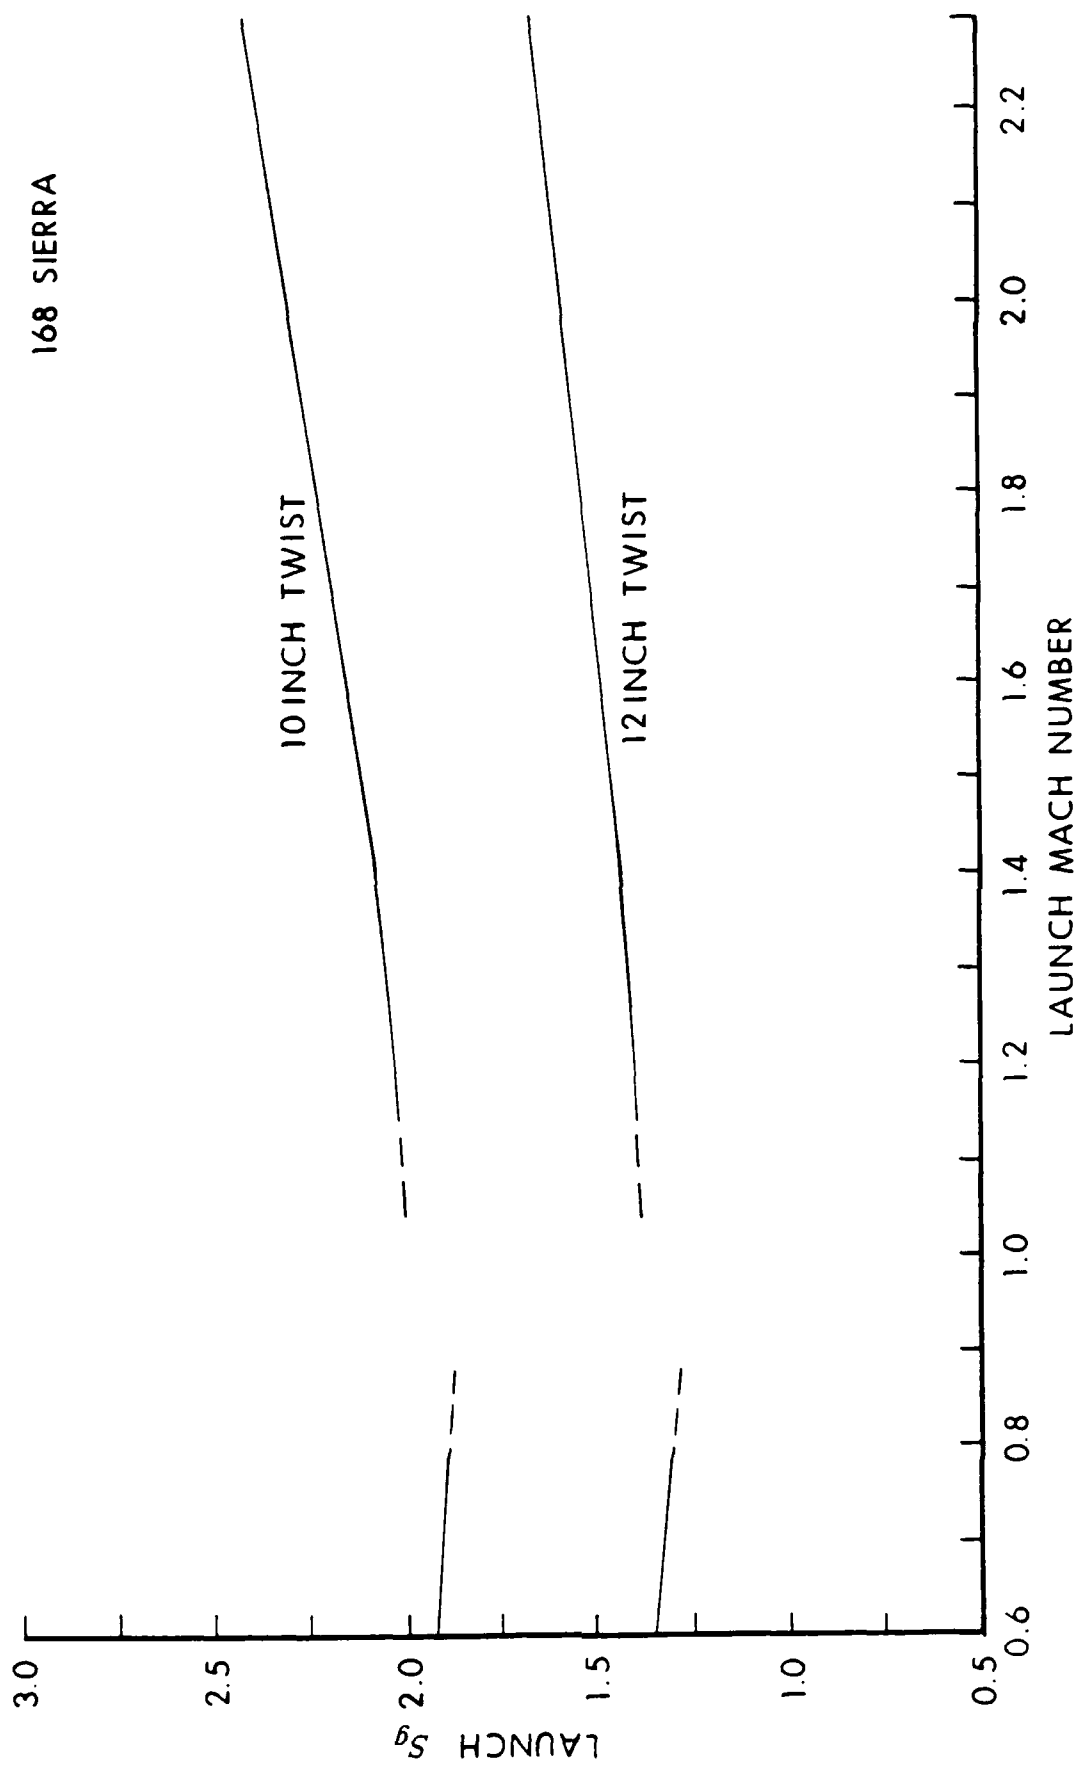


Figure 29. Gyroscopic Stability Factor versus Mach Number, 168 Grain Sierra Bullet


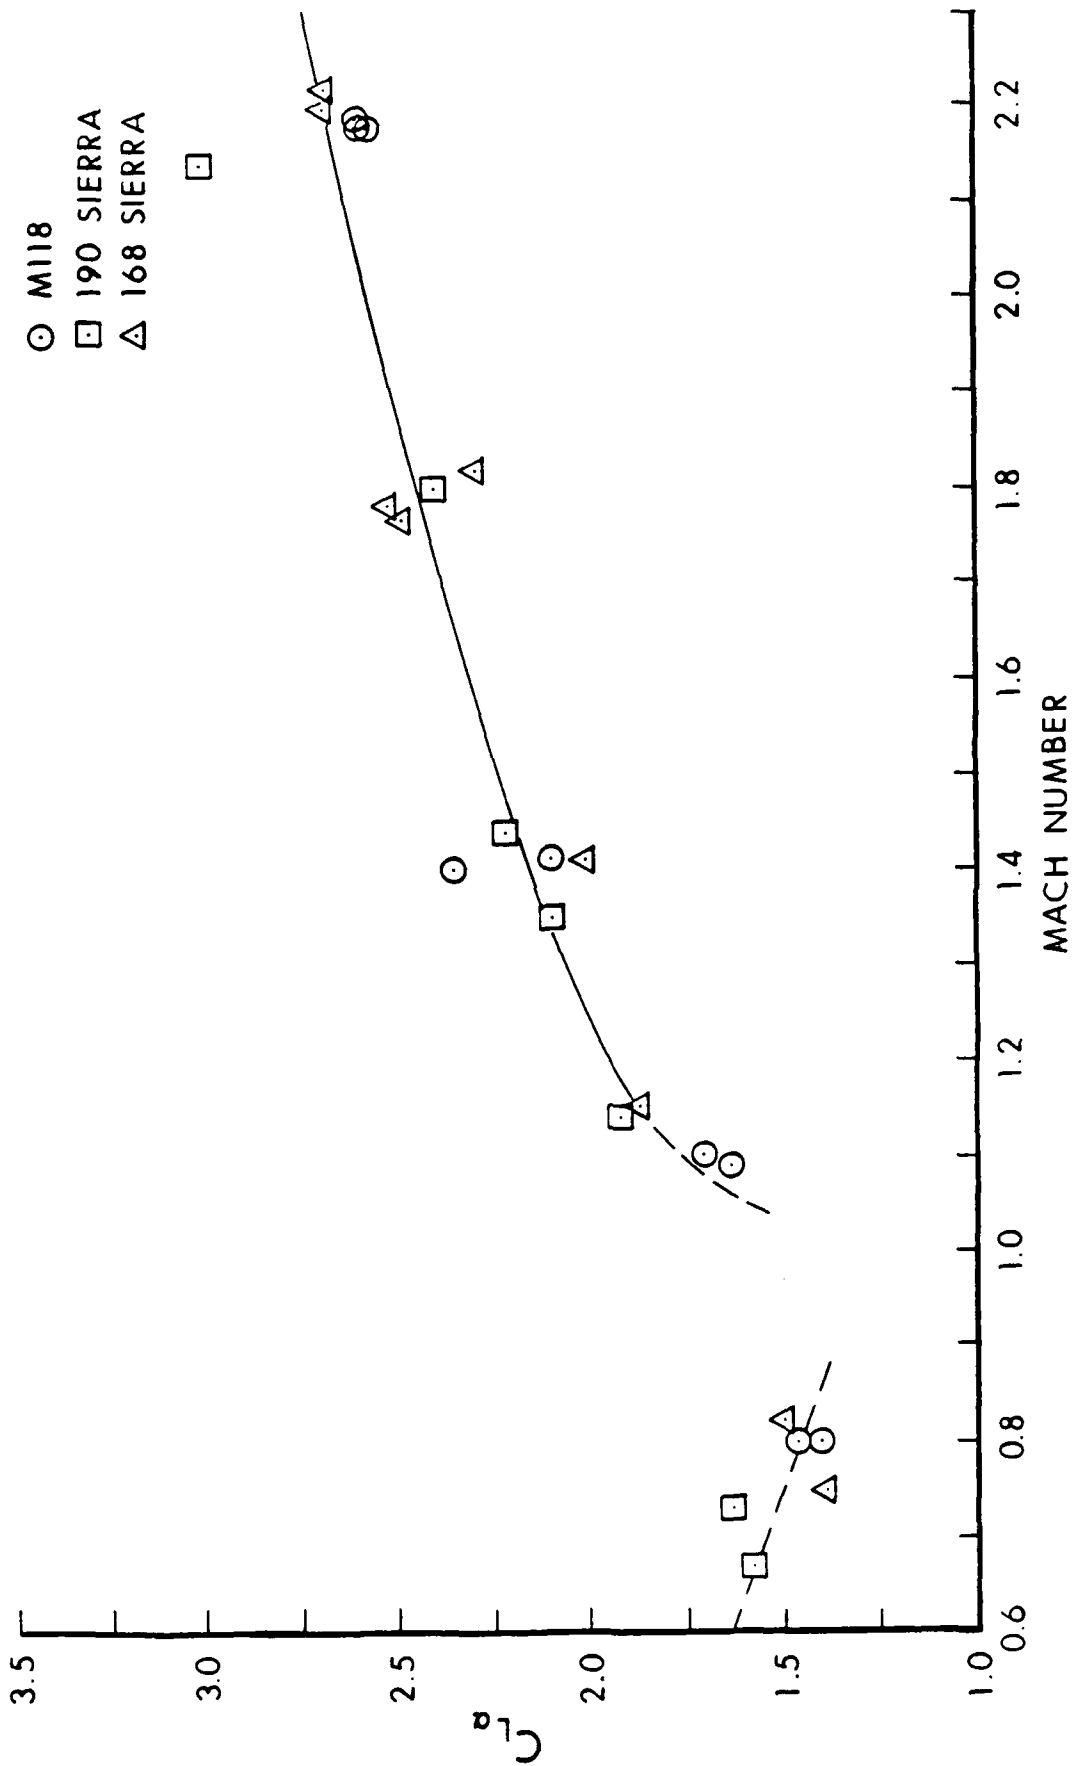


Figure 30. Lift Force Coefficient versus Mach Number.

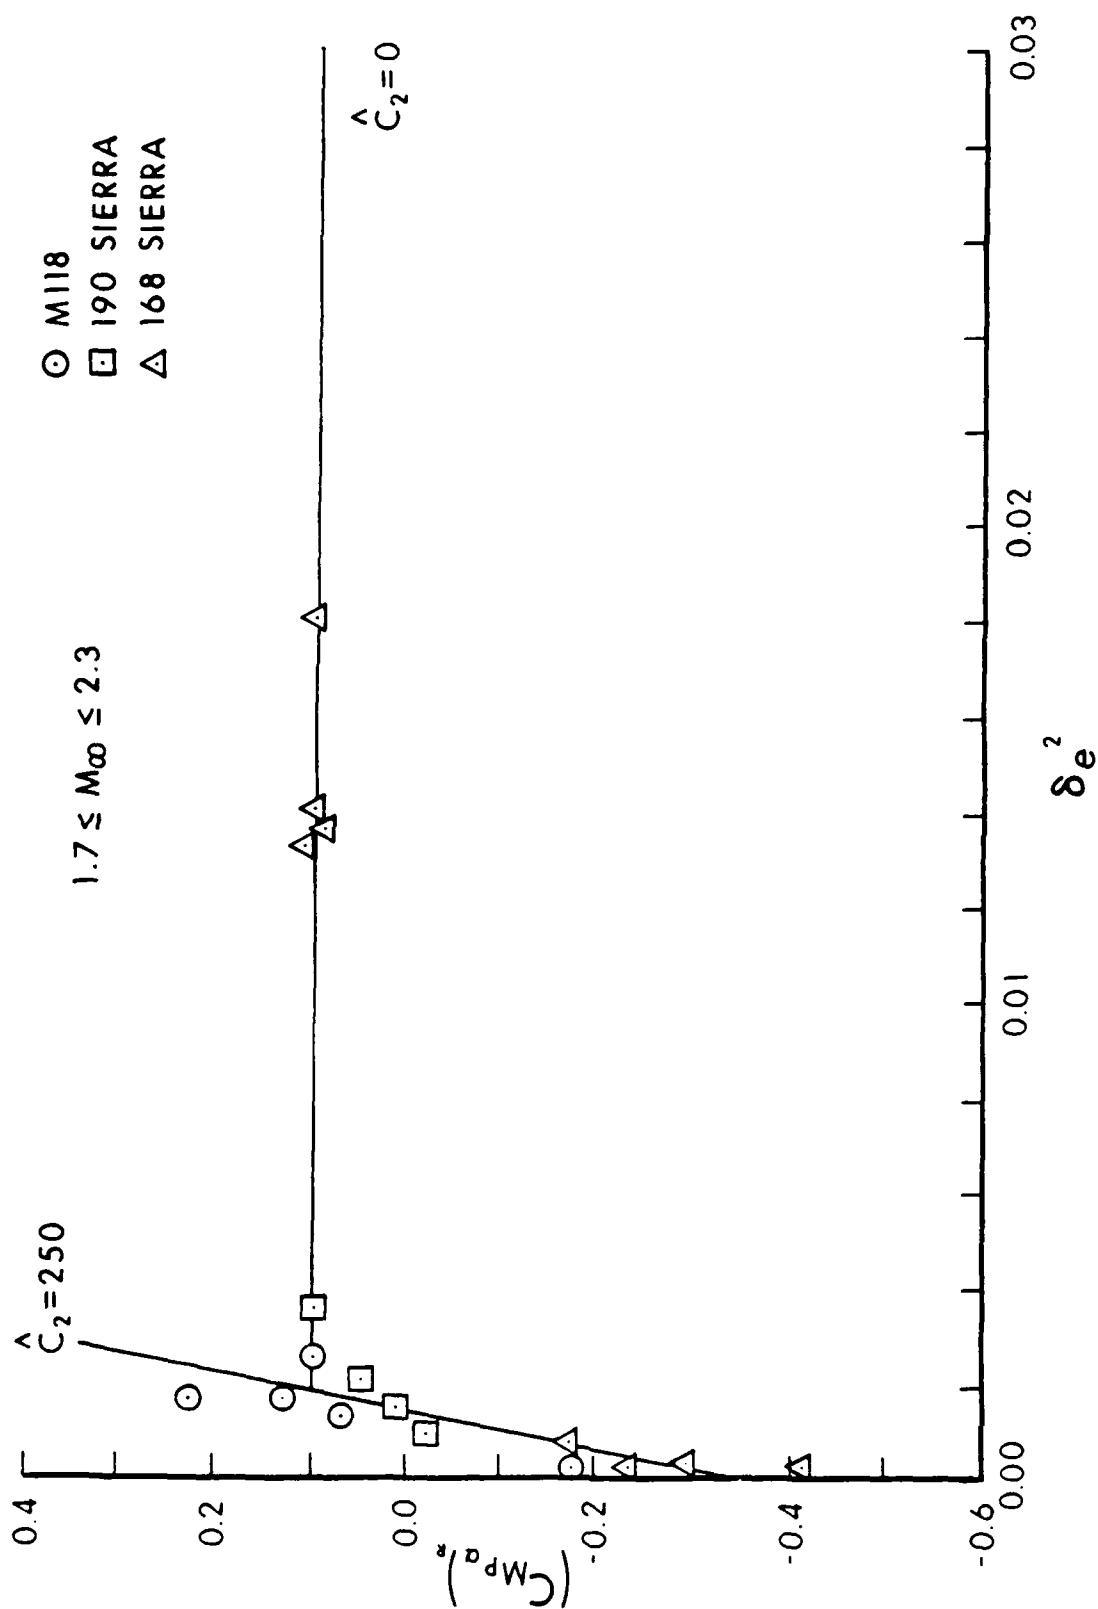

**Figure 31.** Magnus Moment Coefficient versus Effective Squared Yaw.

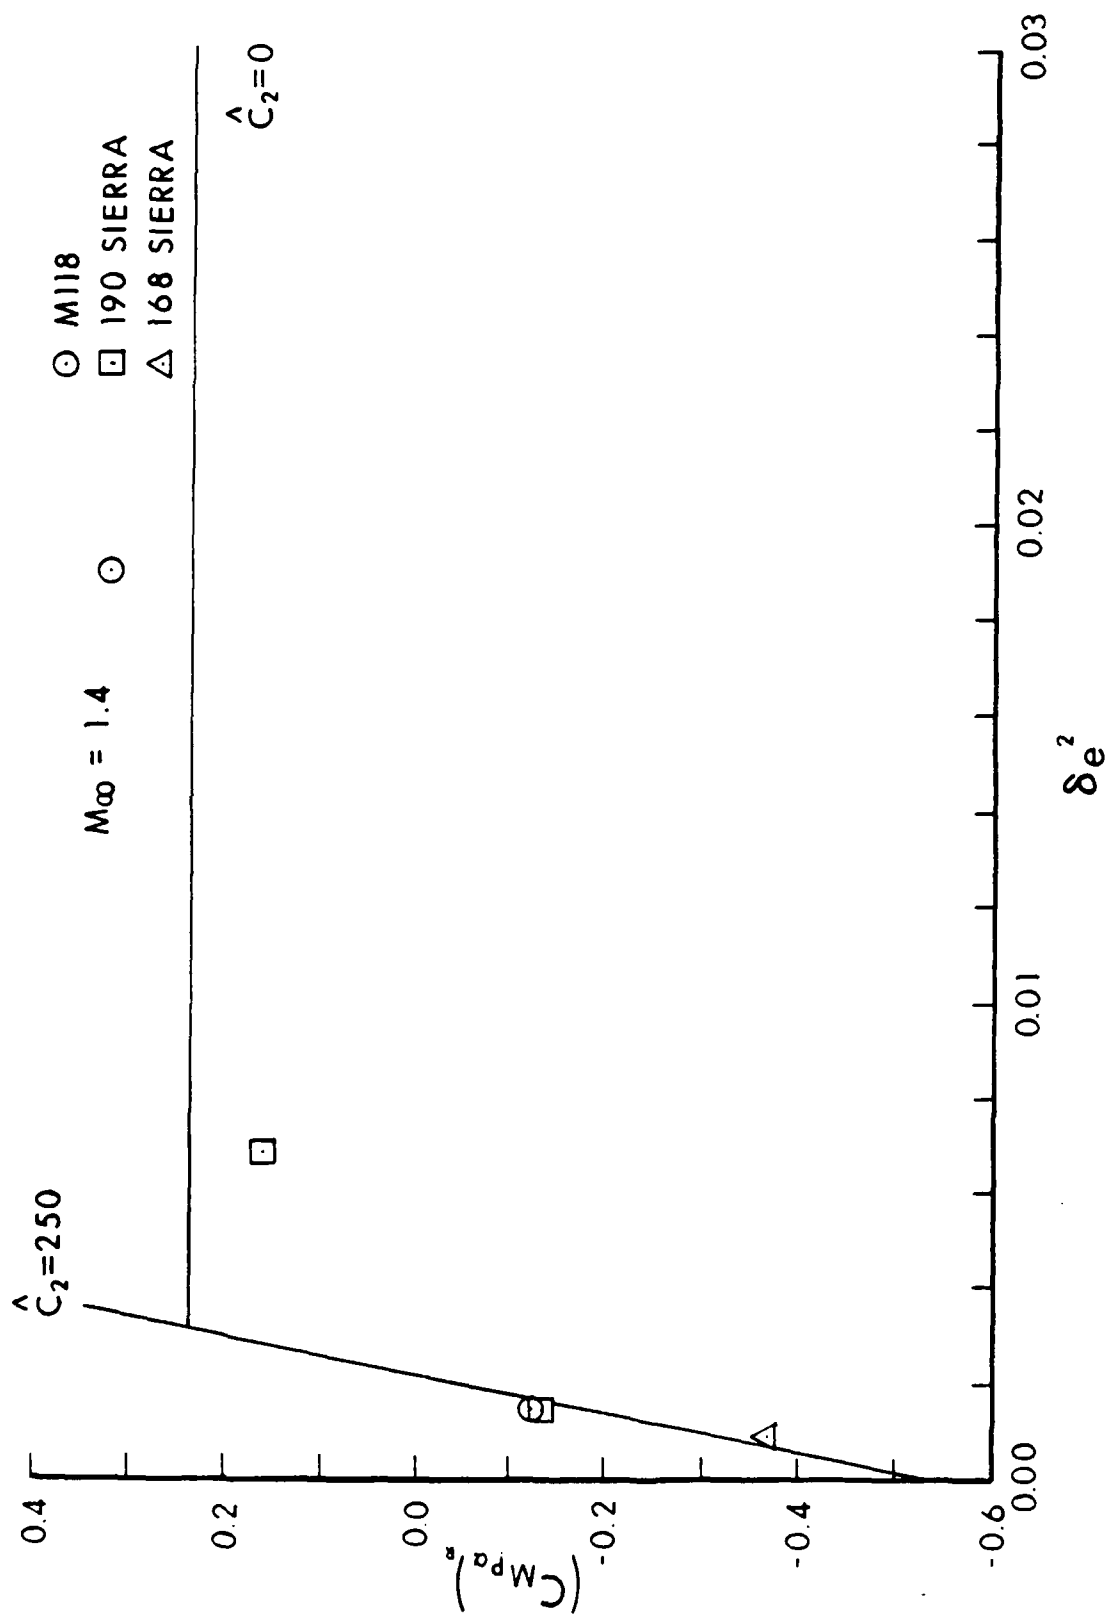


Figure 32. Magnus Moment Coefficient versus Effective Squared Yaw.


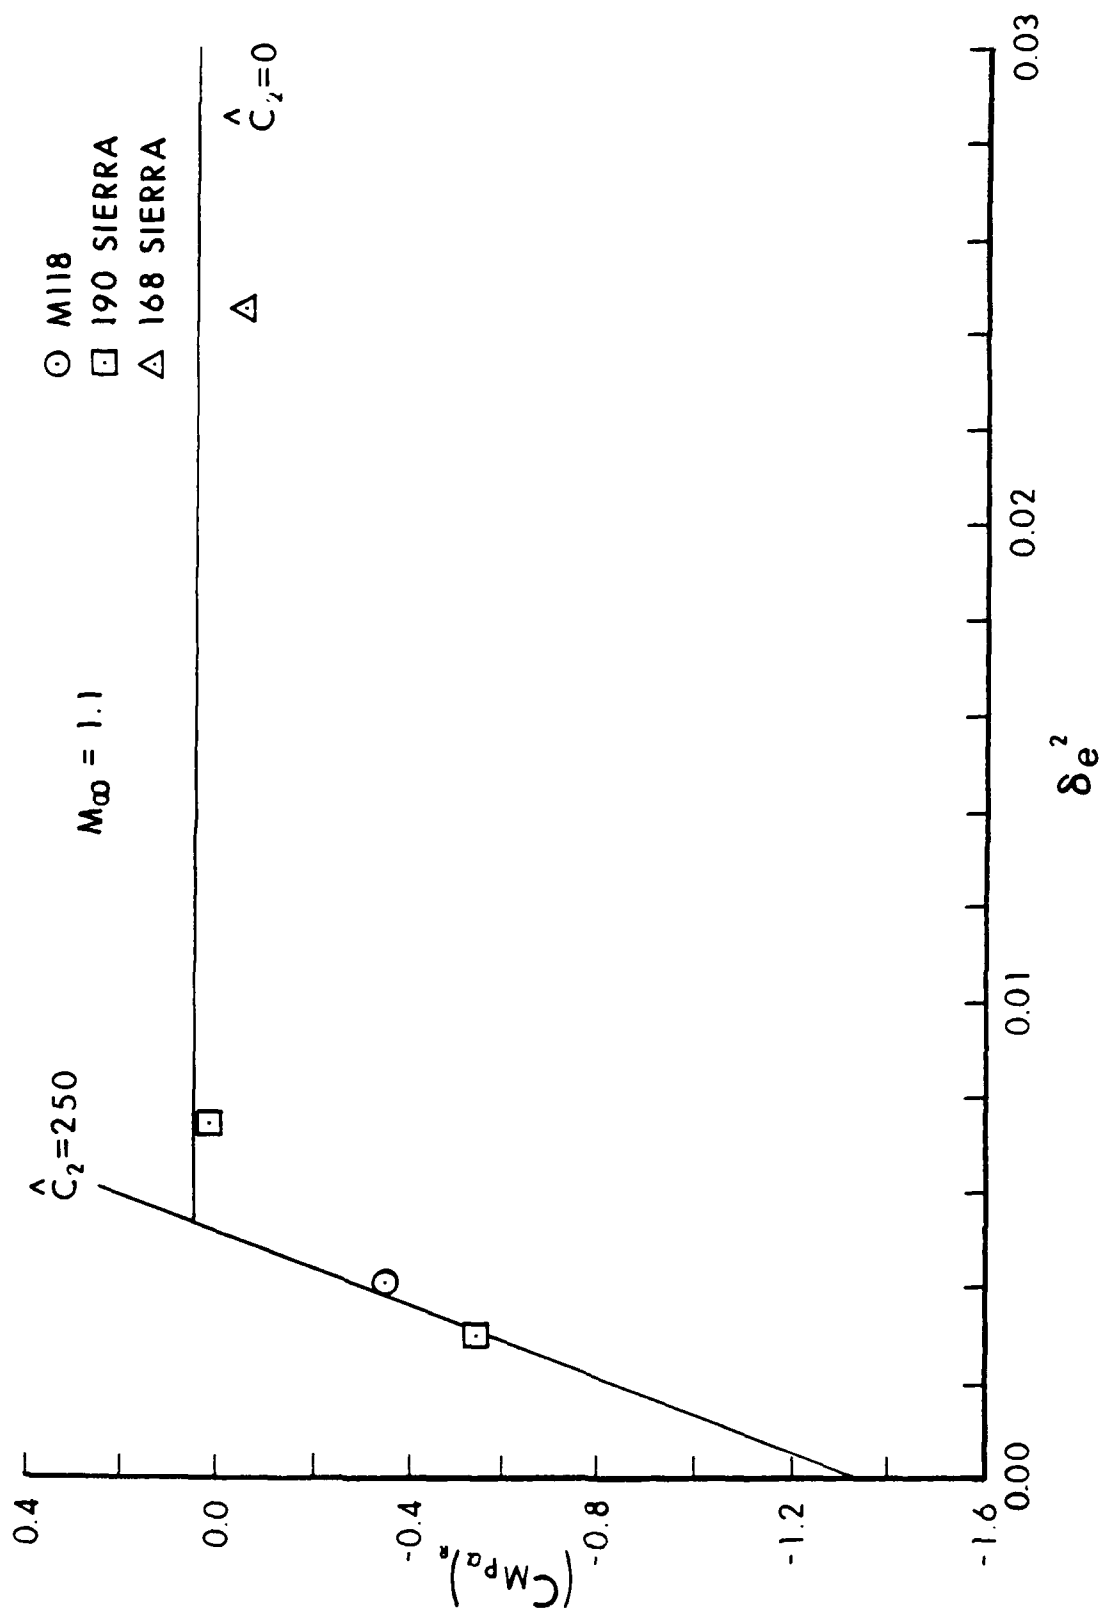


Figure 33. Magnus Moment Coefficient versus Effective Squared Yaw.

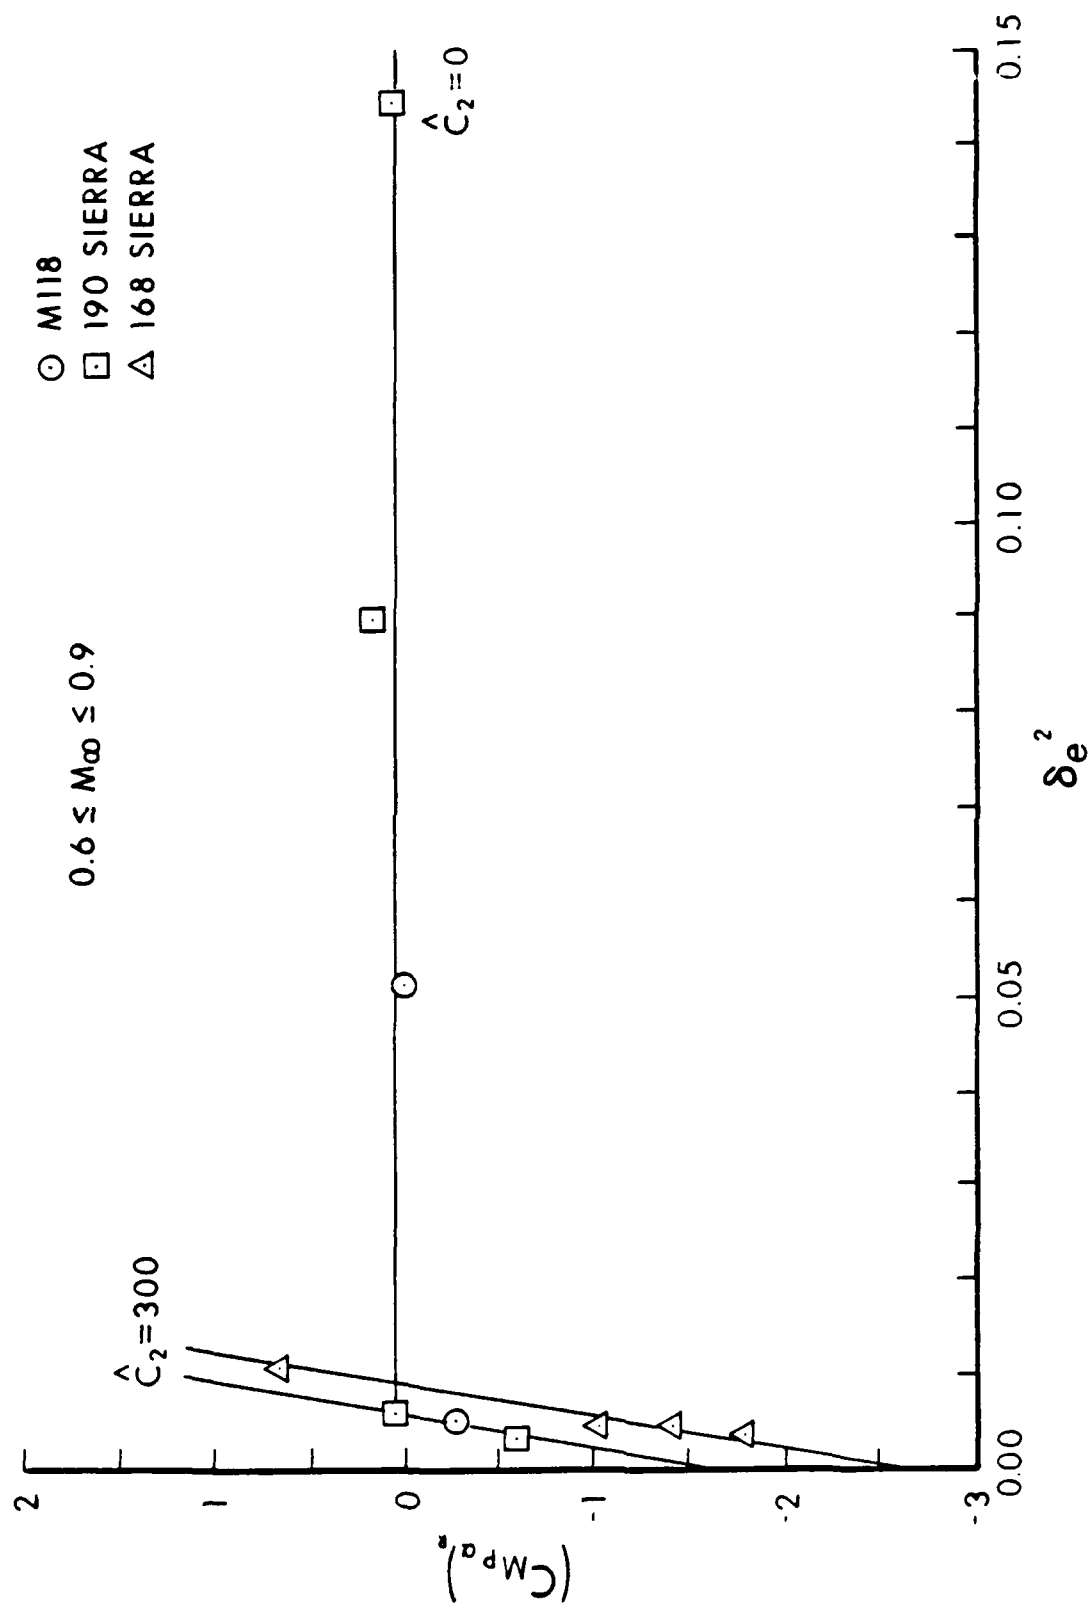

**Figure 34.** Magnus Moment Coefficient versus Effective Squared Yaw.



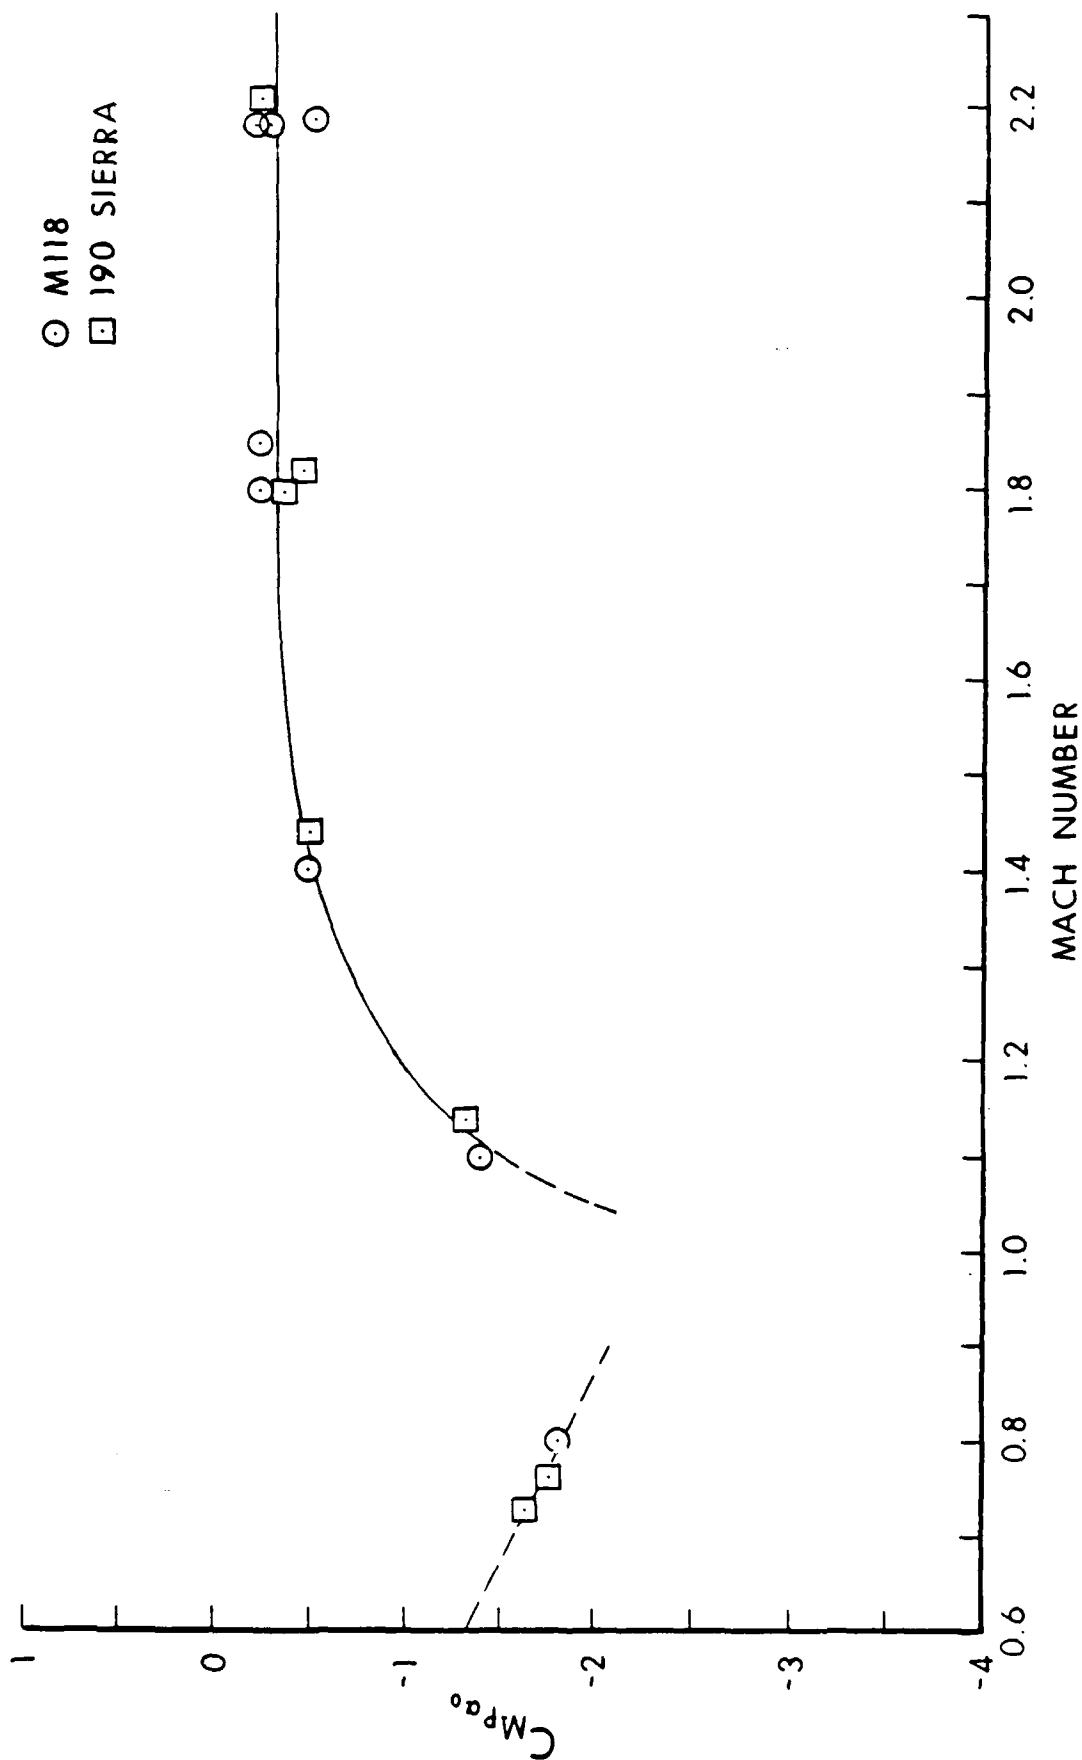


Figure 35. Zero Yaw Magnus Moment Coefficient versus Mach Number.

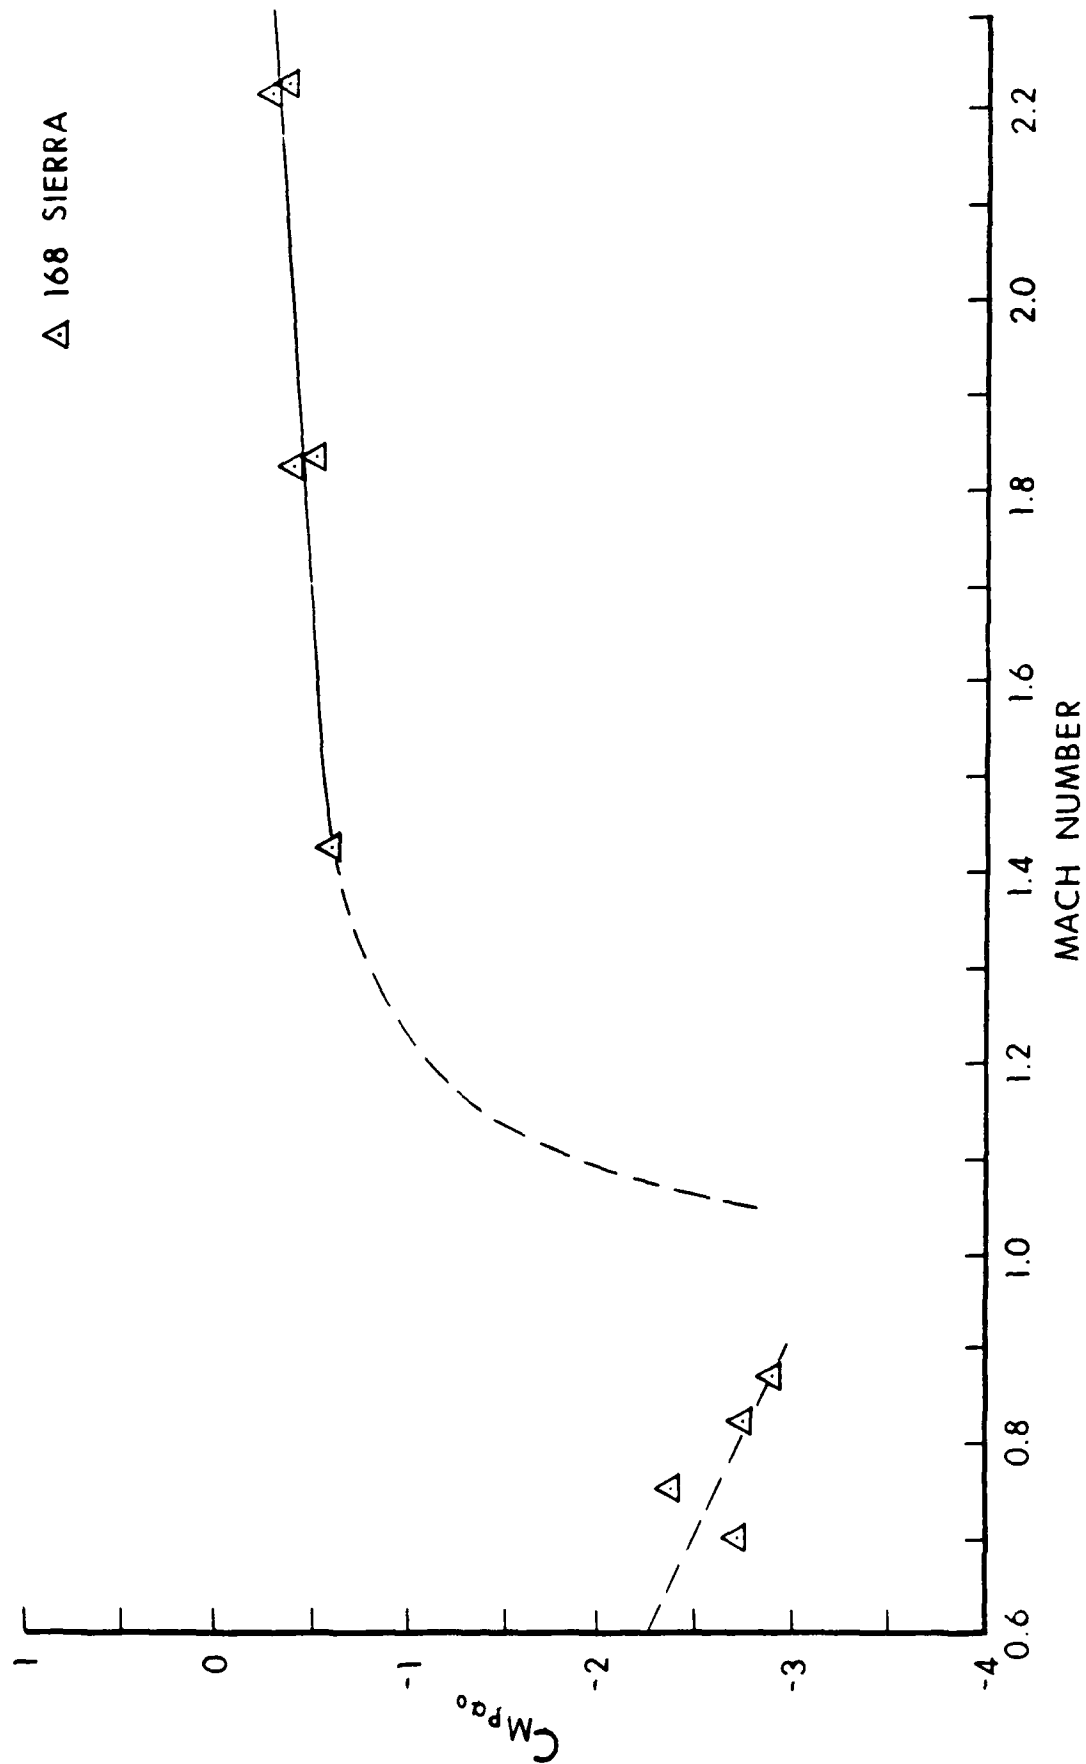

**Figure 36.** Zero-Yaw Magnus Moment Coefficient versus Mach Number.

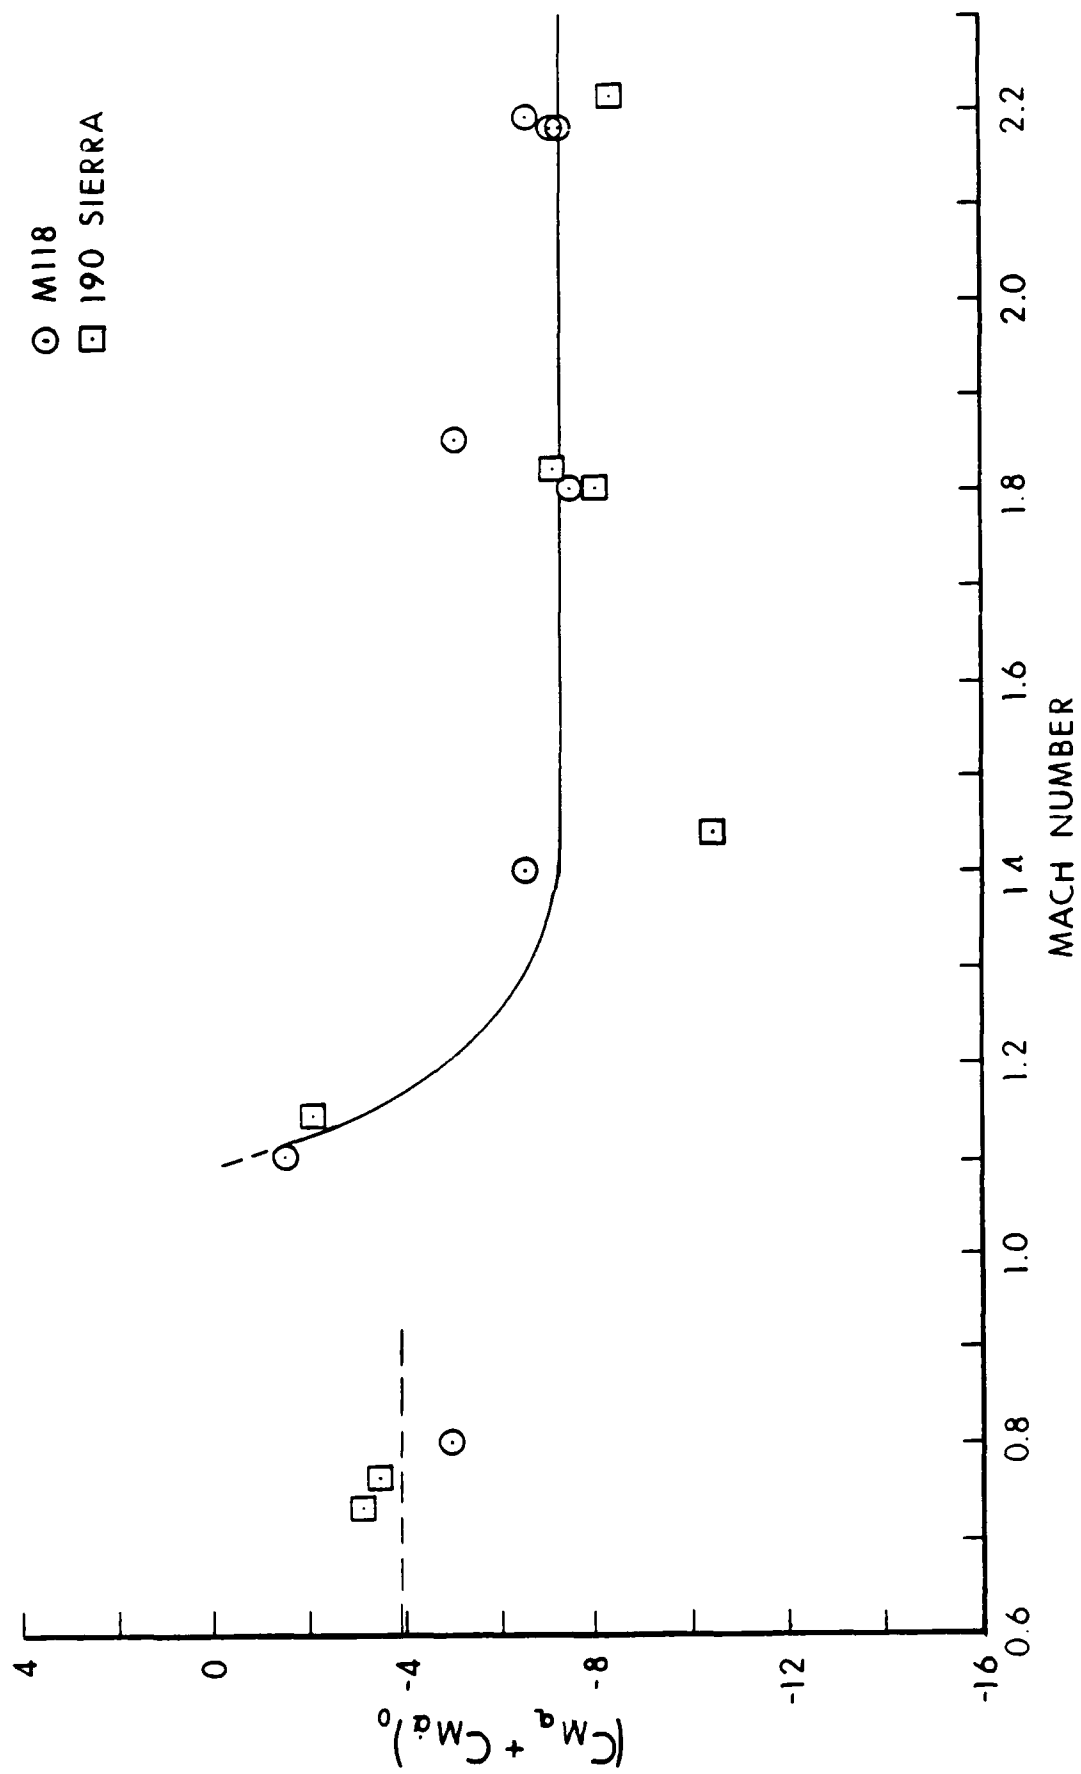

**Figure 37.** Zero-Yaw Pitch Damping Moment Coefficient versus Mach Number.

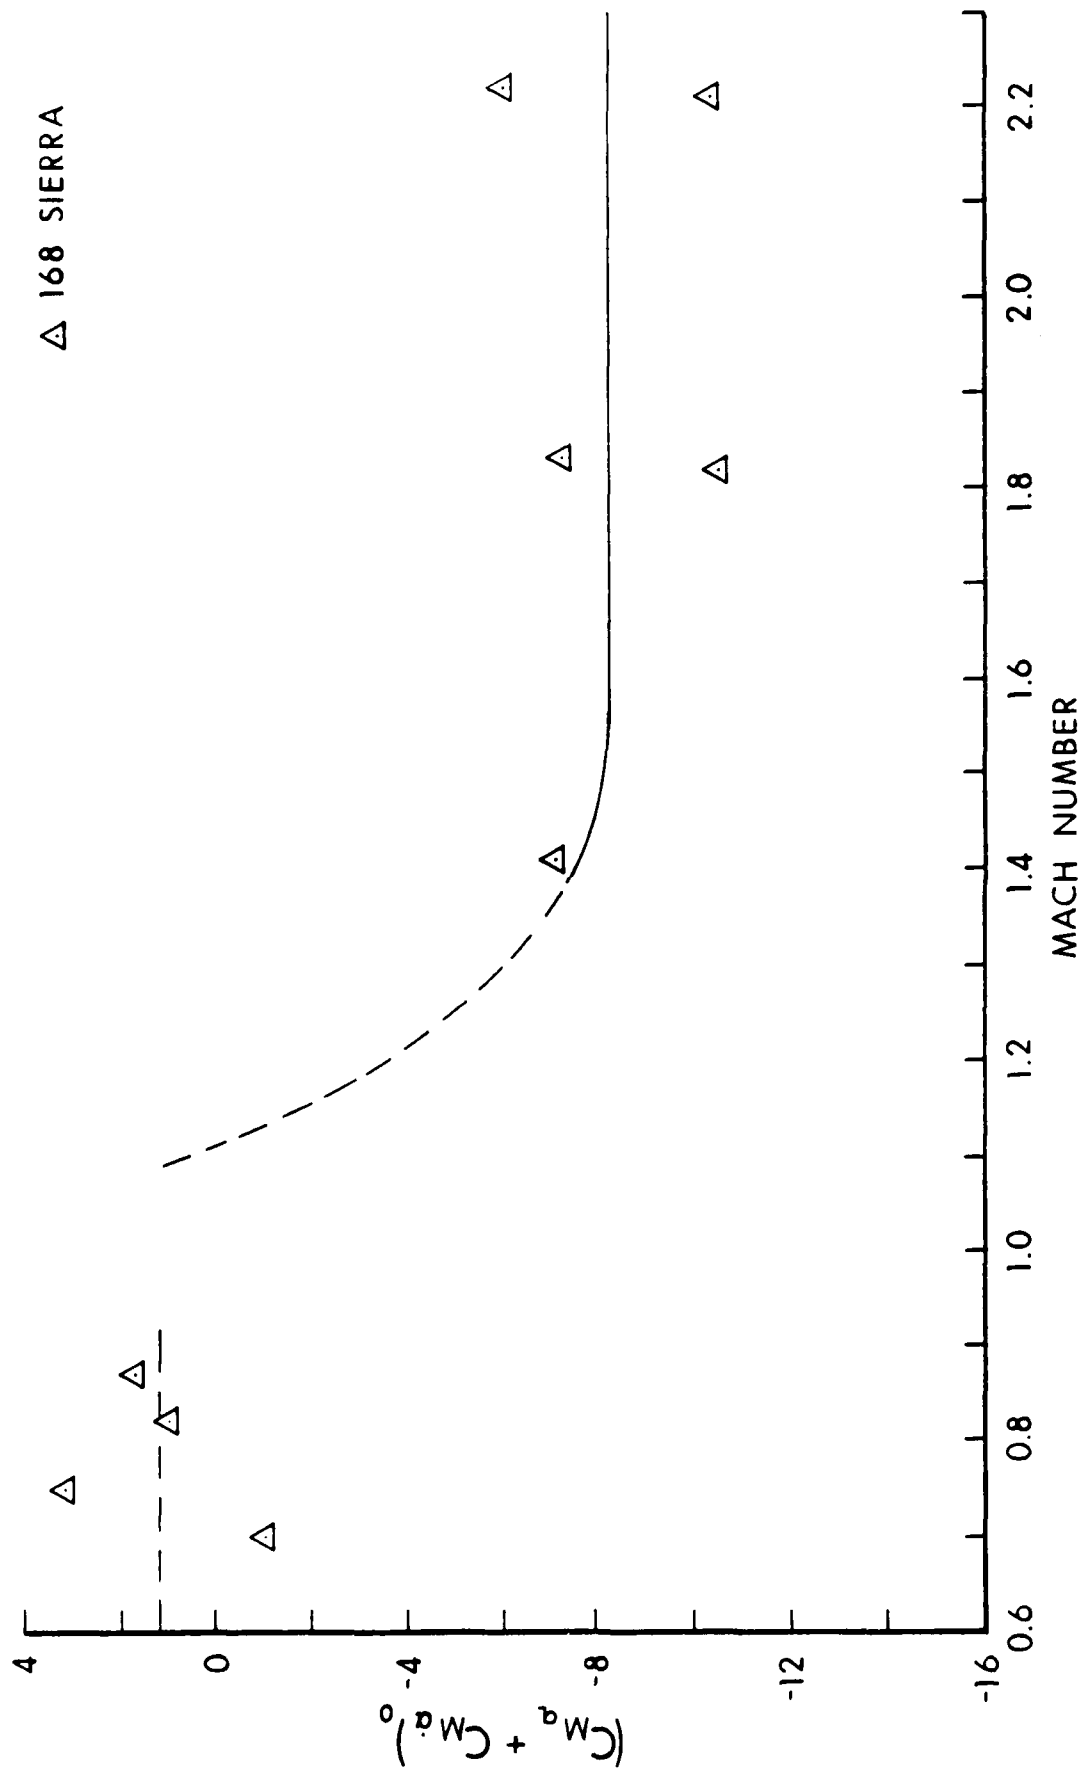


Figure 38. Zero Yaw Pitch Damping Moment Coefficient versus Mach Number.

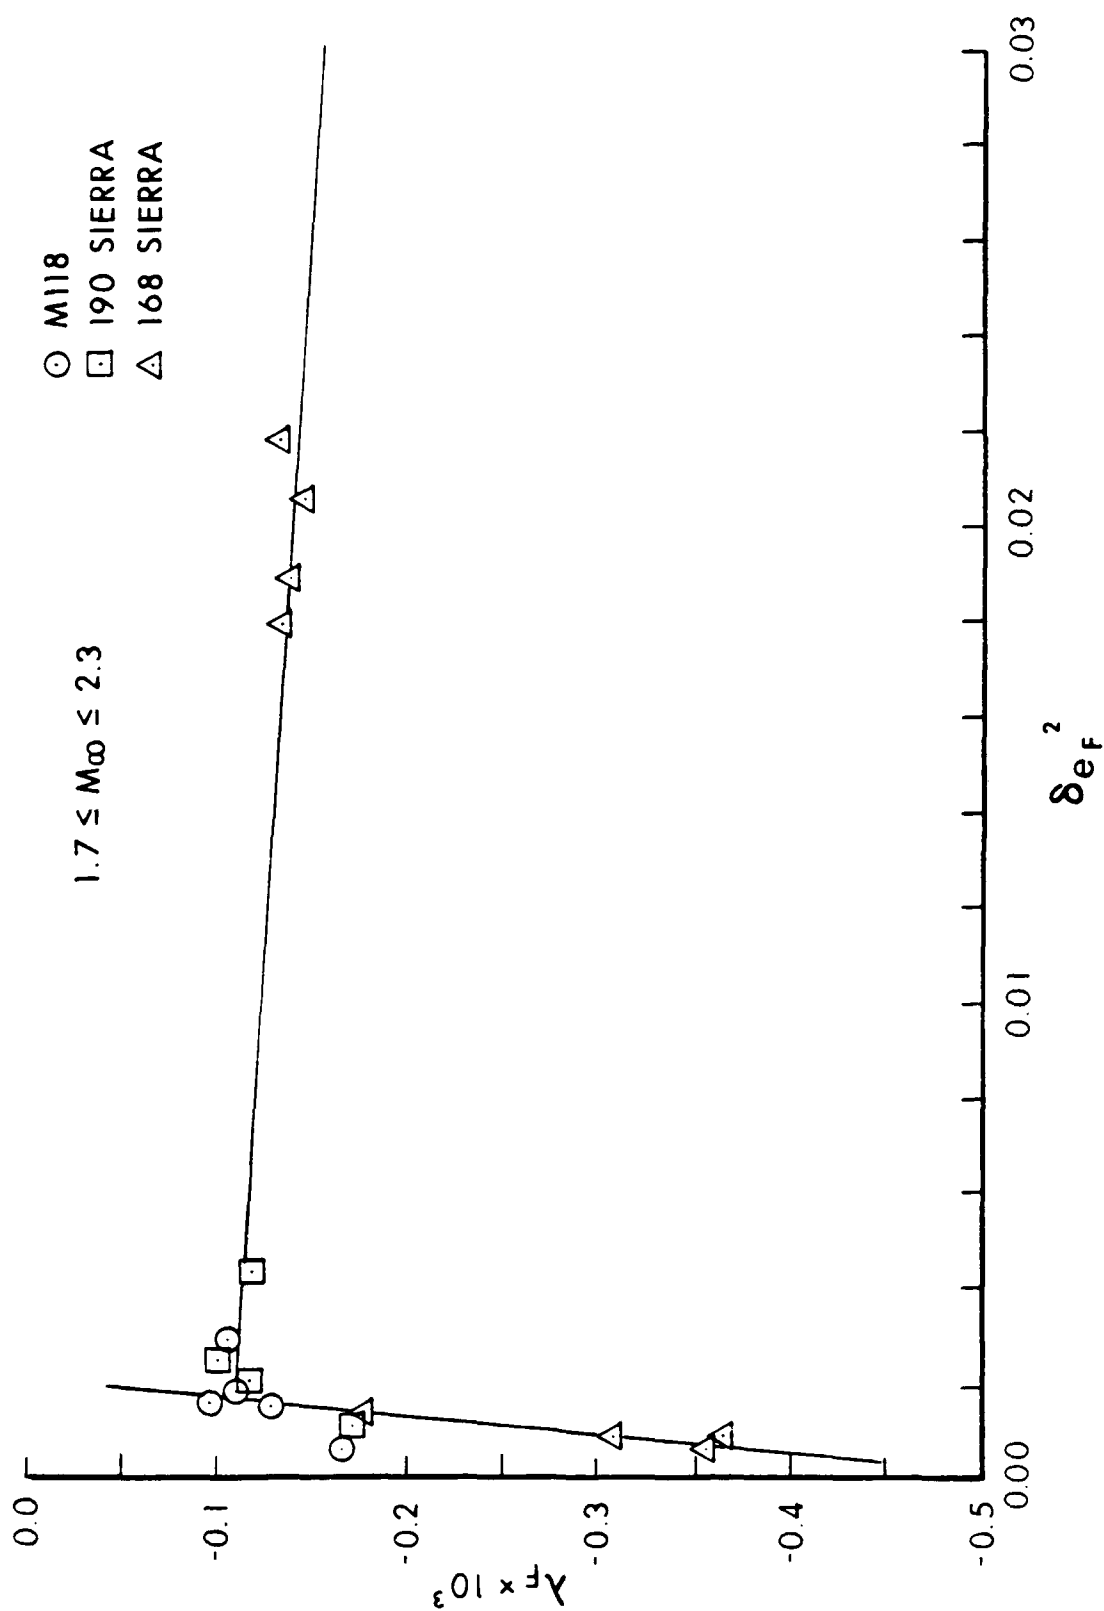


Figure 39. Fast Arm Damping Rate versus Effective Squared Yaw.

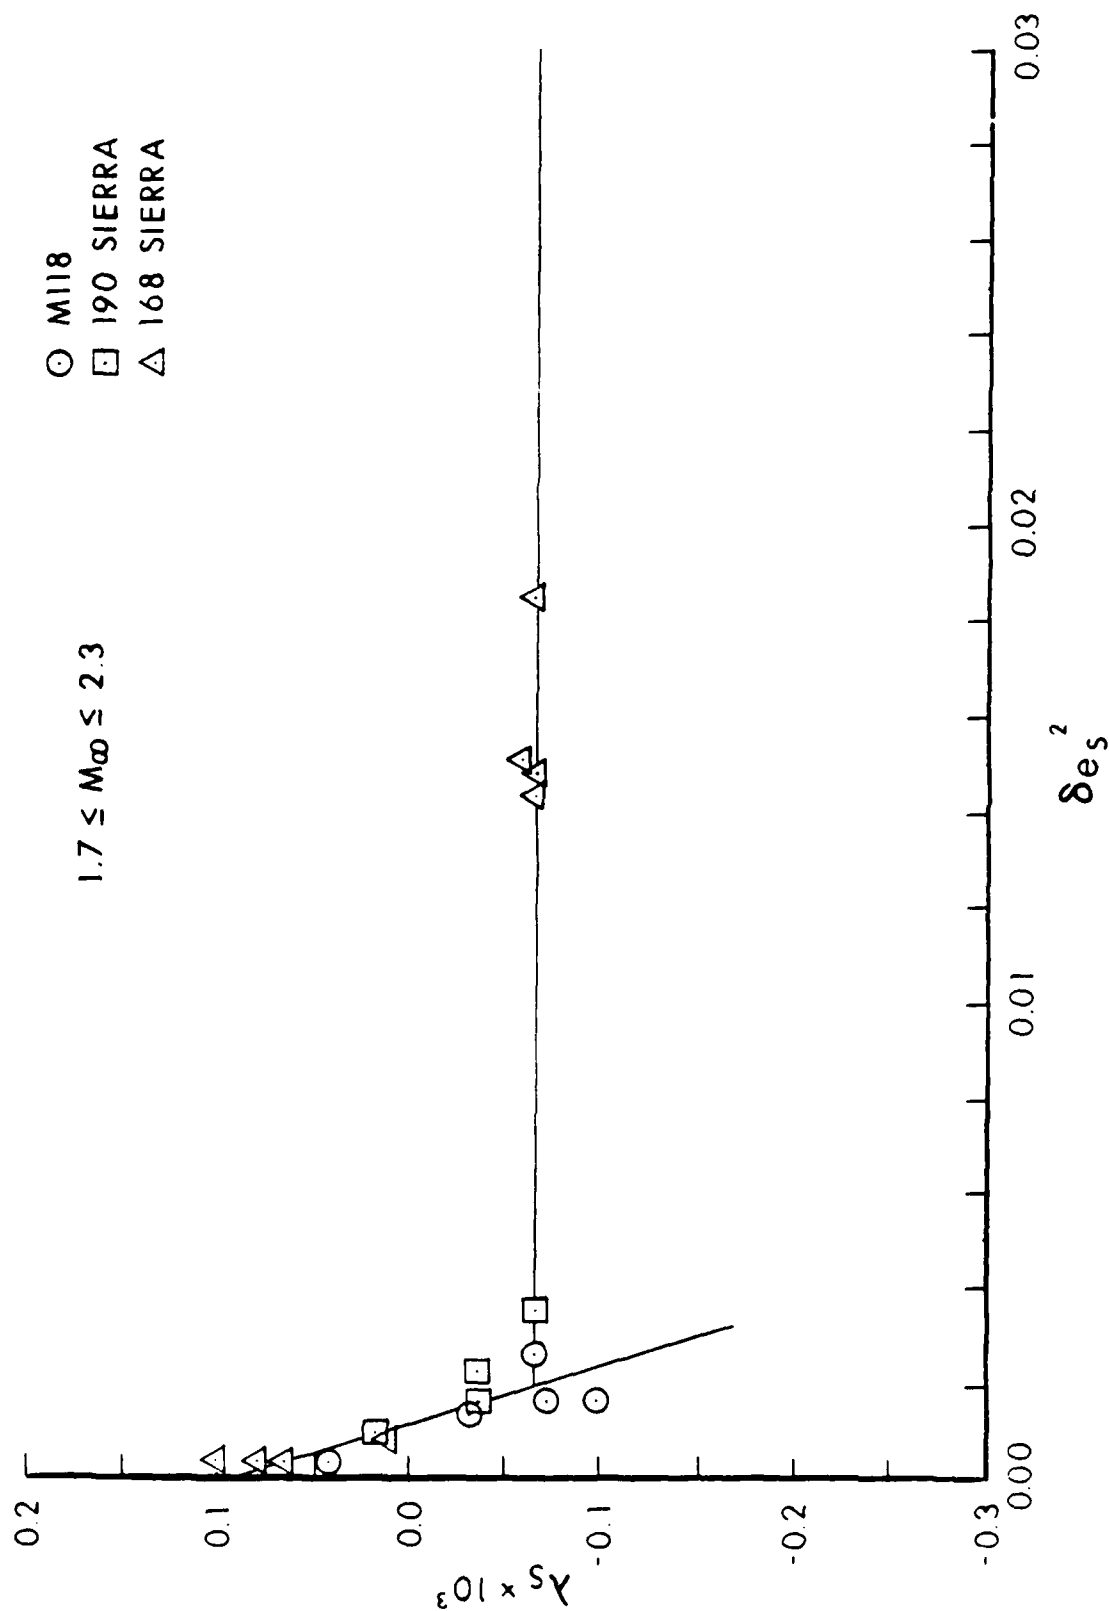


Figure 40. Slow Arm Damping Rate versus Effective Squared Yaw.


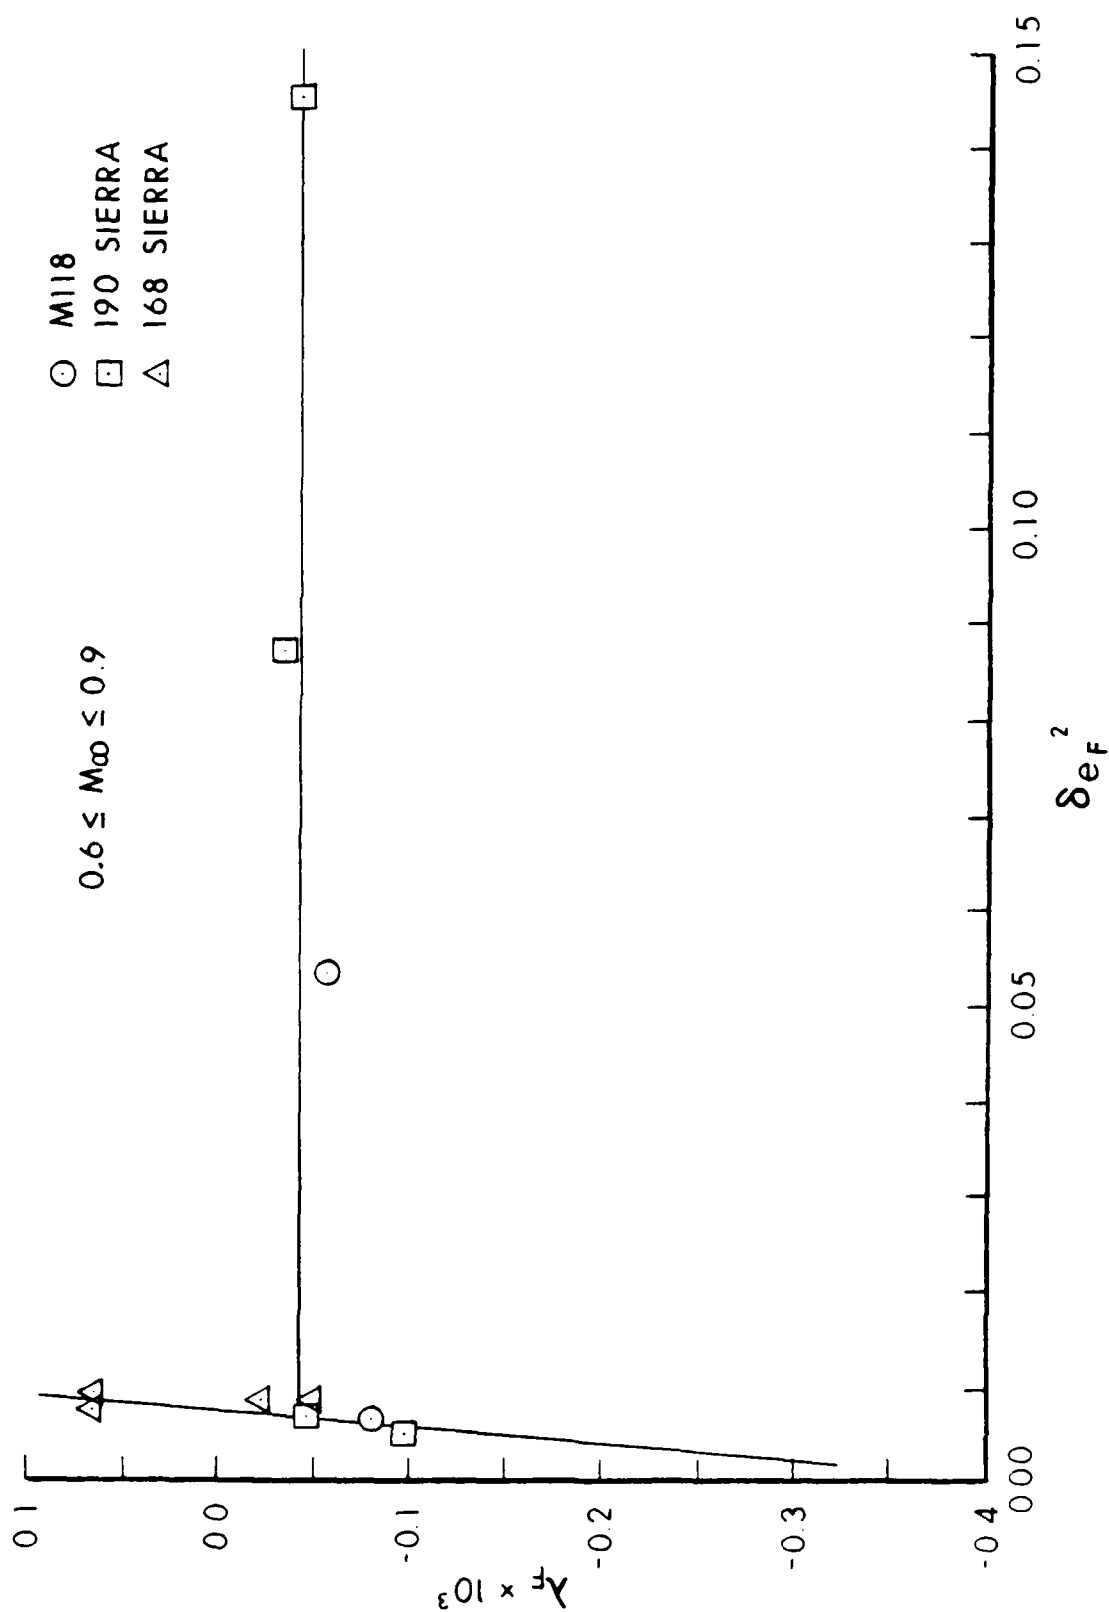


Figure 41. Fast Arm Damping Rate versus Effective Squared Yaw.

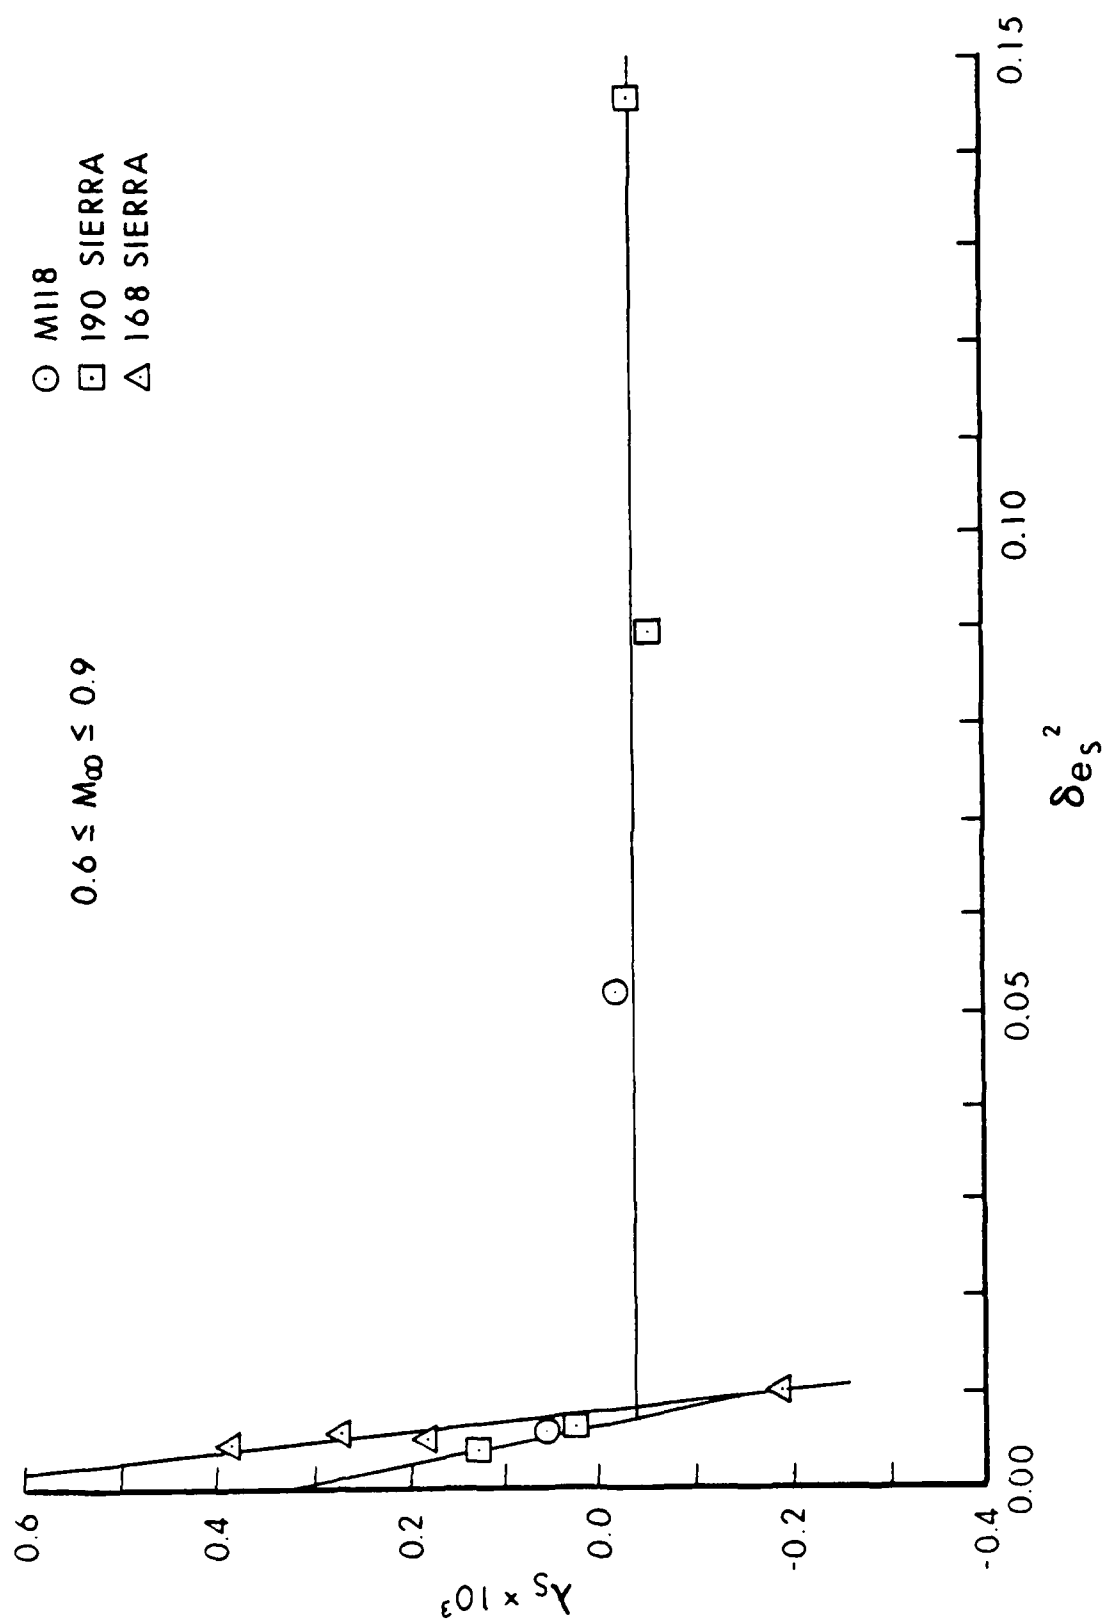

**Figure 42.** Slow Arm Damping Rate versus Effective Squared Yaw.

**Table 1.** Average Physical Characteristics of 7.62mm Match Bullets.

| Projectile | Reference<br>Diameter<br>(mm) | Weight<br>(grams) | Center<br>of<br>Gravity<br>(cal - base) | Axial<br>Moment<br>of Inertia<br>(gm-cm <sup>2</sup> ) | Transverse<br>Moment<br>of Inertia<br>(gm-cm <sup>2</sup> ) |
|------------|-------------------------------|-------------------|-----------------------------------------|--------------------------------------------------------|-------------------------------------------------------------|
| M118       | 7.82                          | 11.27             | 1.80                                    | .716                                                   | 6.78                                                        |
| 190 Sierra | 7.82                          | 12.27             | 1.81                                    | .787                                                   | 7.68                                                        |
| 168 Sierra | 7.82                          | 10.89             | 1.54                                    | .722                                                   | 5.38                                                        |

Table 2. Aerodynamic Characteristics of the M118 Match Bullet.

| Round<br>Number | Mach<br>Number | $\alpha_t$<br>(degrees) | $C_D$ | $C_{M_\alpha}$ | $C_{L_\alpha}$ | $C_{M_{p\alpha}}$ | $(C_{M_q}$<br>+ $C_{M_\alpha}$ ) | $CP_N$<br>(cal -<br>base) |
|-----------------|----------------|-------------------------|-------|----------------|----------------|-------------------|----------------------------------|---------------------------|
| 13903           | 2.191          | 2.60                    | .3290 | 2.54           | 2.61           | .10               | -5.81                            | 2.66                      |
| 13901           | 2.184          | 2.03                    | .3263 | 2.57           | 2.60           | .23               | -6.87                            | 2.68                      |
| 13902           | 2.181          | 2.10                    | .3219 | 2.55           | 2.59           | .13               | -6.35                            | 2.68                      |
| 13906           | 1.848          | 1.01                    | .3361 | 2.78           | --             | -.17              | -4.04                            | --                        |
| 13907           | 1.801          | 1.93                    | .3436 | 2.72           | --             | .07               | -5.99                            | --                        |
| 13912           | 1.407          | 6.64                    | .4629 | 2.89           | 2.12           | .32               | -8.10                            | 2.92                      |
| 13911           | 1.395          | 2.20                    | .3907 | 2.98           | 2.37           | -.12              | -3.16                            | 2.88                      |
| 13918           | 1.098          | 3.22                    | .4326 | 3.18           | 1.72           | -.35              | 1.47                             | 3.27                      |
| 13920           | 1.086          | 7.60                    | .4968 | 3.09           | 1.64           | .16               | -5.80                            | 3.24                      |
| 13929           | .803           | 3.61                    | .1459 | 3.35           | 1.41           | -.27              | .14                              | 3.95                      |
| 13930           | .798           | 10.80                   | .2425 | 3.16           | 1.47           | -.01              | -2.30                            | 3.65                      |

Table 3. Aerodynamic Characteristics of the 190 Grain Sierra Matchking Bullet.

| Round<br>Number | Mach<br>Number | $\alpha_t$<br>(degrees) | $C_D$ | $C_{M_a}$ | $C_{L_a}$ | $C_{M_{p_a}}$ | $(C_{M_q}$<br>+ $C_{M_a}$ ) | $C_{P_N}$<br>(cal -<br>base) |
|-----------------|----------------|-------------------------|-------|-----------|-----------|---------------|-----------------------------|------------------------------|
| 13904           | 2.208          | 1.43                    | .3306 | 2.82      | --        | -.02          | -7.85                       | --                           |
| 13905           | 2.138          | 3.25                    | .3411 | 2.83      | 3.02      | .10           | -6.95                       | 2.65                         |
| 13909           | 1.821          | 2.41                    | .3615 | 2.98      | --        | .05           | -5.18                       | --                           |
| 13908           | 1.800          | 2.11                    | .3560 | 2.96      | 2.41      | .01           | -5.62                       | 2.88                         |
| 13914           | 1.440          | 2.37                    | .3971 | 3.18      | 2.23      | -.13          | -5.53                       | 3.02                         |
| 13915           | 1.347          | 4.52                    | .4590 | 3.19      | 2.11      | .16           | -7.51                       | 3.06                         |
| 13922           | 1.140          | 4.23                    | .4588 | 3.33      | 1.93      | .02           | -5.12                       | 3.20                         |
| 13921           | 1.114          | 2.93                    | .4394 | 3.35      | --        | -.54          | 1.80                        | --                           |
| 13935           | .763           | 3.73                    | .1441 | 3.58      | --        | .05           | -1.11                       | --                           |
| 13933           | .732           | 3.16                    | .1452 | 3.57      | 1.64      | -.58          | 2.82                        | 3.81                         |
| 13934           | .673           | 11.06                   | .2844 | 3.15      | 1.58      | .15           | -4.06                       | 3.50                         |
| 13931           | .639           | 18.29                   | .3848 | 2.94      | 1.97      | .03           | -2.56                       | 3.06                         |

Table 4. Aerodynamic Characteristics of the 168 Grain Sierra International Bullet.

| Round Number | Mach Number | $\alpha_t$ (degrees) | $C_D$ | $C_{M_\alpha}$ | $C_{L_\alpha}$ | $C_{M_{p_\alpha}}$ | $(C_{M_q} + C_{M_\alpha})$ | $CP_N$ (cal - base) |
|--------------|-------------|----------------------|-------|----------------|----------------|--------------------|----------------------------|---------------------|
| 12135        | 2.219       | 6.24                 | .3995 | 2.61           | 2.69           | .10                | -5.56                      | 2.39                |
| 12130        | 2.217       | 1.63                 | .3404 | 2.69           | --             | -.17               | -4.40                      | --                  |
| 12129        | 2.210       | 1.04                 | .3371 | 2.66           | --             | -.23               | -9.48                      | --                  |
| 12136        | 2.202       | 6.95                 | .4099 | 2.62           | 2.69           | .10                | -5.55                      | 2.39                |
| 12138        | 1.826       | 1.29                 | .3664 | 2.89           | --             | -.41               | -6.09                      | --                  |
| 12137        | 1.817       | 1.30                 | .3678 | 2.88           | 2.30           | -.29               | -9.22                      | 2.62                |
| 12144        | 1.775       | 6.60                 | .4496 | 2.84           | 2.53           | .11                | -5.78                      | 2.49                |
| 12145        | 1.773       | 6.81                 | .4503 | 2.84           | 2.49           | .09                | -5.83                      | 2.51                |
| 12151        | 1.450       | 1.75                 | .4111 | 3.06           | --             | --                 | --                         | --                  |
| 12152        | 1.412       | 2.08                 | .4182 | 3.06           | 2.02           | -.37               | -3.72                      | 2.79                |
| 13924        | 1.150       | 7.79                 | .5451 | 3.00           | 1.88           | -.06               | -4.65                      | 2.78                |
| 13923        | 1.119       | 1.79                 | .4433 | 2.99           | --             | --                 | --                         | --                  |
| 13959        | .866        | 4.12                 | .2033 | 3.17           | --             | -1.79              | 13.84                      | --                  |
| 13939        | .817        | 4.18                 | .1713 | 3.36           | 1.50           | -1.41              | 13.60                      | 3.55                |
| 13936        | .753        | 3.73                 | .1592 | 3.35           | 1.39           | -1.02              | 10.74                      | 3.71                |
| 13941        | .703        | 4.65                 | .1538 | 3.29           | --             | .66                | -8.02                      | --                  |

Table 5. Flight Motion Parameters of the M118 Match Bullet.

| Round<br>Number | Mach<br>Number | $S_g$ | $S_d$ | $\lambda_F \times 10^3$<br>(1/cal) | $\lambda_S \times 10^3$<br>(1/cal) | $K_F$ | $K_S$ | $\phi'_F$<br>(r/cal) | $\phi'_S$<br>(r/cal) | Spin<br>(r/cal) |
|-----------------|----------------|-------|-------|------------------------------------|------------------------------------|-------|-------|----------------------|----------------------|-----------------|
| 13903           | 2.191          | 1.81  | .84   | -.106                              | -.065                              | .0276 | .0316 | .0161                | .0032                | .183            |
| 13901           | 2.184          | 1.79  | 1.02  | -.095                              | -.098                              | .0229 | .0232 | .0161                | .0032                | .184            |
| 13902           | 2.181          | 1.77  | .86   | -.110                              | -.071                              | .0217 | .0256 | .0159                | .0033                | .181            |
| 13906           | 1.848          | 1.66  | -.16  | -.164                              | .042                               | .0041 | .0166 | .0160                | .0036                | .186            |
| 13907           | 1.801          | 1.61  | .62   | -.130                              | -.032                              | .0176 | .0262 | .0154                | .0037                | .181            |
| 13912           | 1.407          | 1.58  | 1.01  | -.101                              | -.106                              | .0808 | .0738 | .0155                | .0038                | .183            |
| 13911           | 1.395          | 1.52  | .46   | -.108                              | -.007                              | .0172 | .0332 | .0152                | .0040                | .182            |
| 13918           | 1.098          | 1.39  | --    | -.060                              | .046                               | .0353 | .0435 | .0145                | .0045                | .180            |
| 13920           | 1.086          | 1.43  | .85   | -.092                              | -.062                              | .0920 | .0955 | .0147                | .0043                | .180            |
| 13929           | .803           | 1.30  | -2.01 | -.078                              | .062                               | .0393 | .0490 | .0140                | .0049                | .179            |
| 13930           | .798           | 1.38  | .73   | -.055                              | -.017                              | .1287 | .1358 | .0144                | .0045                | .179            |

Table 6. Flight Motion Parameters of the 190 Grain Sierra Matchking Bullet.

| Round<br>Number | Mach<br>Number | $S_j$ | $S_d$ | $\lambda_F \times 10^3$<br>(1/cal) | $\lambda_S \times 10^3$<br>(1/cal) | $K_F$ | $K_S$ | $\phi'_F$<br>(r/cal) | $\phi'_S$<br>(r/cal) | Spin<br>(r/cal) |
|-----------------|----------------|-------|-------|------------------------------------|------------------------------------|-------|-------|----------------------|----------------------|-----------------|
| 13904           | 2.208          | 1.69  | .30   | -.171                              | .017                               | .0157 | .0192 | .0152                | .0033                | .181            |
| 13905           | 2.138          | 1.72  | .82   | -.118                              | -.067                              | .0313 | .0412 | .0156                | .0033                | .185            |
| 13909           | 1.821          | 1.61  | .70   | -.101                              | -.036                              | .0240 | .0320 | .0152                | .0036                | .184            |
| 13908           | 1.800          | 1.61  | .65   | -.119                              | -.034                              | .0180 | .0300 | .0152                | .0036                | .183            |
| 13914           | 1.440          | 1.54  | .26   | -.157                              | .014                               | .0143 | .0372 | .0150                | .0038                | .184            |
| 13915           | 1.347          | 1.54  | .78   | -.121                              | -.058                              | .0440 | .0580 | .0150                | .0038                | .184            |
| 13922           | 1.140          | 1.43  | .61   | -.113                              | -.022                              | .0475 | .0560 | .0143                | .0042                | .180            |
| 13921           | 1.114          | 1.42  | -10.2 | -.108                              | .092                               | .0294 | .0414 | .0143                | .0042                | .181            |
| 13935           | .763           | 1.29  | --    | -.043                              | .029                               | .0440 | .0478 | .0134                | .0048                | .178            |
| 13933           | .732           | 1.30  | --    | -.098                              | .134                               | .0316 | .0444 | .0136                | .0047                | .179            |
| 13934           | .673           | 1.52  | 1.12  | -.031                              | -.054                              | .1753 | .1676 | .0147                | .0039                | .181            |
| 13931           | .639           | 1.68  | 1.05  | -.040                              | -.033                              | .2179 | .2253 | .0154                | .0034                | .184            |

Table 7. Flight Motion Parameters of the 168 Grain Sierra International Bullet.

| Round<br>Number | Mach<br>Number | $S_g$ | $S_d$ | $\lambda_F \times 10^3$<br>(1/cal) | $\lambda_S \times 10^3$<br>(1/cal) | $K_F$ | $K_S$ | $\phi'_F$<br>(r/cal) | $\phi'_S$<br>(r/cal) | Spin<br>(r/cal) |
|-----------------|----------------|-------|-------|------------------------------------|------------------------------------|-------|-------|----------------------|----------------------|-----------------|
| 12135           | 2.219          | 1.95  | .76   | -.134                              | -.066                              | .0522 | .0836 | .0194                | .0035                | .171            |
| 12130           | 2.217          | 1.92  | .15   | -.176                              | .016                               | .0091 | .0258 | .0195                | .0036                | .172            |
| 12129           | 2.210          | 1.88  | .00   | -.355                              | .064                               | .0017 | .0172 | .0191                | .0036                | .169            |
| 12136           | 2.202          | 1.94  | .77   | -.132                              | -.066                              | .0719 | .0908 | .0194                | .0035                | .171            |
| 12138           | 1.826          | 1.78  | -.38  | -.305                              | .102                               | .0014 | .0206 | .0191                | .0039                | .171            |
| 12137           | 1.817          | 1.78  | -.05  | -.365                              | .079                               | .0016 | .0213 | .0190                | .0039                | .171            |
| 12144           | 1.775          | 1.84  | .75   | -.138                              | -.065                              | .0571 | .0882 | .0194                | .0038                | .173            |
| 12145           | 1.773          | 1.84  | .70   | -.145                              | -.058                              | .0561 | .0934 | .0194                | .0038                | .173            |
| 12151           | 1.450          | 1.68  | -.07  | --                                 | --                                 | .0003 | .0273 | .0188                | .0042                | .171            |
| 12152           | 1.412          | 1.68  | -.43  | -.220                              | .079                               | .0044 | .0339 | .0187                | .0042                | .171            |
| 13924           | 1.150          | 1.89  | .34   | -.152                              | -.010                              | .0848 | .1045 | .0203                | .0038                | .180            |
| 13923           | 1.119          | 1.88  | --    | --                                 | --                                 | .0111 | .0263 | .0202                | .0038                | .179            |
| 13959           | .866           | 1.68  | --    | -.021                              | .387                               | .0199 | .0621 | .0192                | .0043                | .175            |
| 13939           | .817           | 1.61  | --    | .064                               | .271                               | .0260 | .0644 | .0189                | .0045                | .175            |
| 13936           | .753           | 1.63  | --    | .066                               | .181                               | .0316 | .0555 | .0192                | .0045                | .176            |
| 13941           | .703           | 1.64  | 1.33  | -.047                              | -.187                              | .0648 | .0473 | .0191                | .0044                | .175            |

## References

1. Braun, W.F., "The Free Flight Aerodynamics Range." US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Report No. 1048, August 1958. (AD 202249)
2. Murphy C.H., "Data Reduction for the Free Flight Spark Ranges," US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Report No. 900, February 1954. (AD 35833)
3. Murphy, C.H., "The Measurement of Non-Linear Forces and Moments by Means of Free Flight Tests," US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Report No. 974, February 1956. (AD 93521)
4. Murphy, C.H., "Free Flight Motion of Symmetric Missiles," US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, BRL Report No. 1216, July 1963. (AD 442757)
5. McCoy, R.L., "Aerodynamic and Flight Dynamic Characteristics of the New Family of 5.56mm NATO Ammunition," US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, MR Report No. 3476, October 1985. (AD A162133)



## List of Symbols

|                 |   |                                                                  |                                                                                                                                                                                                                   |
|-----------------|---|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $C_2$           | = | cubic static moment coefficient                                  |                                                                                                                                                                                                                   |
| $\hat{C}_2$     | = | cubic Magnus moment coefficient                                  |                                                                                                                                                                                                                   |
| $C_D$           | = | $\frac{\text{Drag Force}}{[(1/2)\rho V^2 S]}$                    |                                                                                                                                                                                                                   |
| $C_{D0}$        | = | zero-yaw drag coefficient                                        |                                                                                                                                                                                                                   |
| $C_{D\delta^2}$ | = | quadratic yaw drag coefficient                                   |                                                                                                                                                                                                                   |
| $C_{L\alpha}$   | = | $\frac{\text{Lift Force}}{[(1/2)\rho V^2 S \delta]}$             | Positive coefficient: Force in plane of total angle of attack. $\alpha_t$ , $\perp$ to trajectory in direction of $\alpha_t$ . ( $\alpha_t$ directed from trajectory to missile axis.) $\delta = \sin \alpha_t$ . |
| $C_{N\alpha}$   | = | $\frac{\text{Normal Force}}{[(1/2)\rho V^2 S \delta]}$           | Positive coefficient: Force in plane of total angle of attack. $\alpha_t$ , $\perp$ to missile axis in direction of $\alpha_t$ . $C_{N\alpha} \cong C_{L\alpha} + C_D$                                            |
| $C_{M\alpha}$   | = | $\frac{\text{Static Moment}}{[(1/2)\rho V^2 S d \delta]}$        | Positive coefficient: Moment increases angle of attack $\alpha_t$ .                                                                                                                                               |
| $C_{Mp\alpha}$  | = | $\frac{\text{Magnus Moment}}{[(1/2)\rho V^2 S d (pd/V) \delta]}$ | Positive coefficient: Moment rotates nose $\perp$ to plane of $\alpha_t$ in direction of spin.                                                                                                                    |
| $C_{Np\alpha}$  | = | $\frac{\text{Magnus Force}}{[(1/2)\rho V^2 S (pd/V) \delta]}$    | Negative coefficient: Force acts in direction of $90^\circ$ rotation of the positive lift force against spin.                                                                                                     |

## List of Symbols (Continued)

For most exterior ballistic uses, where  $\dot{\alpha} \approx q$ ,  $\dot{\beta} \approx -r$ , the definition of the damping moment sum is equivalent to:

|                                    |                                                                              |                                                             |
|------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------|
| $(C_{M_q} + C_{M_{\dot{\alpha}}})$ | $= \frac{\text{Damping Moment}}{[(1/2) \rho V^2 S d (q_t d/V)]}$             | Positive coefficient: Moment increases angular velocity.    |
| $C_{l_p}$                          | $= \frac{\text{Roll Damping Moment}}{[(1/2) \rho V^2 S d (p d/V)]}$          | Negative coefficient: Moment decreases rotational velocity. |
| $C_{P_N}$                          | $=$ center of pressure of the normal force, positive from base to nose       |                                                             |
| $\alpha, \beta$                    | $=$ angle of attack, side slip                                               |                                                             |
| $\alpha_t$                         | $= (\alpha^2 + \beta^2)^{1/2} = \sin^{-1} \delta$ ,<br>total angle of attack |                                                             |
| $\lambda_F$                        | $=$ fast mode damping rate                                                   | negative $\lambda$ indicates damping                        |
| $\lambda_S$                        | $=$ slow mode damping rate                                                   | negative $\lambda$ indicates damping                        |
| $\rho$                             | $=$ air density                                                              |                                                             |
| $\phi'_F$                          | $=$ fast mode frequency                                                      |                                                             |
| $\phi'_S$                          | $=$ slow mode frequency                                                      |                                                             |
| $c.m.$                             | $=$ center of mass                                                           |                                                             |
| $d$                                | $=$ body diameter of projectile, reference length                            |                                                             |
| $d_2$                              | $=$ cubic pitch damping moment coefficient                                   |                                                             |
| $I_x$                              | $=$ axial moment of inertia                                                  |                                                             |

## List of Symbols (Continued)

|        |   |                                               |
|--------|---|-----------------------------------------------|
| $I_y$  | = | transverse moment of inertia                  |
| $K_F$  | = | magnitude of the fast yaw mode                |
| $K_S$  | = | magnitude of the slow yaw mode                |
| $l$    | = | length of projectile                          |
| $m$    | = | mass of projectile                            |
| $M$    | = | Mach number                                   |
| $p$    | = | roll rate                                     |
| $q, r$ | = | transverse angular velocities                 |
| $q_t$  | = | $(q^2 + r^2)^{\frac{1}{2}}$                   |
| $R$    | = | subscript denotes range value                 |
| $s$    | = | dimensionless arc length along the trajectory |
| $S$    | = | $(\pi d^2/4)$ , reference area                |
| $S_d$  | = | dynamic stability factor                      |
| $S_g$  | = | gyroscopic stability factor                   |
| $V$    | = | velocity of projectile                        |

## List of Symbols (Continued)

### Effective Squared Yaw Parameters

$$\begin{aligned}
 \tilde{\delta} &\cong K_F^2 + K_S^2 \\
 \delta_e^2 &= K_F^2 + K_S^2 + \frac{(\phi'_F K_F^2 - \phi'_S K_S^2)}{(\phi'_F - \phi'_S)} \\
 \delta_{e_F}^2 &= K_F^2 + 2 K_S^2 \\
 \delta_{e_S}^2 &= 2 K_F^2 + K_S^2 \\
 \delta_{e_{HT}}^2 &= \left( \frac{I_y}{I_x} \right) \left[ \frac{(\phi'_F + \phi'_S) (K_S^2 - K_F^2)}{(\phi'_F - \phi'_S)} \right] \\
 \delta_{e_{TH}}^2 &= \left( \frac{I_x}{I_y} \right) \left[ \frac{(K_F^2 \phi'^2_F - K_S^2 \phi'^2_S)}{(\phi'^2_F - \phi'^2_S)} \right] \\
 \delta_{e_{HH}}^2 &= \frac{(\phi'_F K_S^2 - \phi'_S K_F^2)}{(\phi'_F - \phi'_S)}
 \end{aligned}$$

## Distribution List

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                        | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                              |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 12                       | Administrator<br>Defense Technical<br>Information Center<br>ATTN: DTIC-DDA<br>Cameron Station<br>Alexandria, VA 22304-6145 | 1                        | Commander<br>US Army Missile Command<br>ATTN: AMSMI-RD<br>Redstone Arsenal, AL 35898-5000                                                                        |
| 1                        | HQDA (SARD-TR)<br>Washington, DC 20310                                                                                     | 1                        | Commander<br>US Army Missile Command<br>ATTN: AMSMI-AS<br>Redstone Arsenal, AL 35898-5500                                                                        |
| 1                        | Commander<br>US Army Materiel Command<br>ATTN: AMCDRA-ST<br>5001 Eisenhower Avenue<br>Alexandria, VA 22333-0001            | 1                        | Commander<br>Armament Research, Development<br>and Engineering Center<br>US Army AMCCOM<br>ATTN: SMCAR-MSI<br>Picatinny Arsenal, NJ 07806-5000                   |
| 1                        | Commander<br>US Army Laboratory Command<br>ATTN: AMSLC-DL<br>Adelphi, MD 20783-1145                                        | 1                        | Commander<br>Armament Research, Development<br>and Engineering Center<br>US Army AMCCOM<br>ATTN: SMCAR-TDC<br>Picatinny Arsenal, NJ 07806-5000                   |
| 1                        | Commander<br>US Army Armament, Munitions<br>and Chemical Command<br>ATTN: AMCAR-ESP-L<br>Rock Island, IL 61299-7300        | 1                        | Director<br>Benet Weapons Laboratory<br>Armament Research, Development<br>and Engineering Center<br>US Army AMCCOM<br>ATTN: SMCAR-LCB-TL<br>Watervliet, NY 12189 |
| 1                        | Commander<br>US Army Tank Automotive<br>Command<br>ATTN: AMSTA-TSL<br>Warren, MI 48090                                     | 1                        | Director<br>US Army TRADOC<br>Analysis Command<br>ATTN: ATAA-SL<br>White Sands Missile Range,<br>NM 88002                                                        |
| 1                        | Commander<br>US Army Communications -<br>Electronics Command<br>ATTN: AMSEL-ED<br>Fort Monmouth, NJ 07703                  |                          |                                                                                                                                                                  |

## Distribution List (Continued)

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                            | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                                                               |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                        | Commandant<br>US Army Infantry School<br>ATTN: ATSH-CD-CSO-OR<br>Fort Benning, GA 31905-5400                                   | 1                        | President<br>US Army Infantry Board<br>ATTN: ATZB-IB-SA<br>Mr. L. Tomlinson<br>Fort Benning, GA 31905-5800                                                                                        |
| 1                        | Commander<br>US Army Aviation<br>Systems Command<br>ATTN: AMSAV-DACL<br>4300 Goodfellow Blvd.<br>St. Louis, MO 63120-1798      | 1                        | Commander<br>Naval Sea Systems Command<br>ATTN: Code 62CE<br>Mr. R. Brown<br>Washington, DC 20362-5101                                                                                            |
| 1                        | Director<br>US Army Aviation Research<br>and Technology Activity<br>Ames Research Center<br>Moffett Field, CA 94035-1099       | 4                        | Commanding Officer<br>Naval Weapons Support Center<br>ATTN: Code 2021, Bldg. 2521<br>Mr. C. Zeller<br>ATTN: Code 2022<br>Mr. R. Henry<br>Mr. G. Dormick<br>Mr. J. Maassen<br>Crane, IN 47522-5020 |
| 1                        | Air Force Armament Laboratory<br>ATTN: AFATL/DLODL<br>Eglin AFB, FL 32542-5000                                                 |                          |                                                                                                                                                                                                   |
| 1                        | AFWL/SUL<br>Kirtland AFB, NM 87117-6008                                                                                        | 1                        | Commanding General<br>MCDEC<br>ATTN: Code D091<br>Fire Power Division<br>Quantico, VA 22134-5080                                                                                                  |
| 1                        | US Army JFK Center<br>ATTN: ATSU-CD-ML<br>Mr. S. Putnam<br>Fort Bragg, NC 28307-5007                                           |                          |                                                                                                                                                                                                   |
| 1                        | Commander<br>US Army Materiel Command<br>ATTN: AMXSO<br>Mr. J. McKernan<br>5001 Eisenhower Avenue<br>Alexandria, VA 22333-0001 | 1                        | US Secret Service<br>J. J. Rowley Training Center<br>ATTN: Mr. R. Lutz<br>9200 Powder Mill Road, RD 2<br>Laurel, MD 20707                                                                         |
| 1                        | Commandant<br>US Army Infantry School<br>ATTN: ATSH-CD<br>Fort Benning, GA 31905-5400                                          |                          |                                                                                                                                                                                                   |

## Distribution List (Continued)

No. of  
Copies

Organization

14

Commander  
Armament Research, Development  
and Engineering Center  
US Army AMCCOM  
ATTN: SMCAR-SCJ  
    Mr. J. Ackley  
    Mr. V. Shisler  
    Mr. H. Wreden  
    Mr. J. Hill  
ATTN: SMCAR-CCL-AD  
    Mr. F. Puzycki  
    Mr. W. Schupp  
    Mr. R. Mazeski  
    Mr. D. Conway  
ATTN: SMCAR-CCL-FA  
    Mr. R. Schlenner  
    Mr. J. Fedewitz  
    Mr. P. Wyluda  
ATTN: SMCAR-SCA-AP  
    Mr. W. Bunting  
    Mr. P. Errante  
ATTN: SMCAR-ATE-AP  
    Mr. R. Kline  
Picatinny Arsenal, NJ 07806-5000

### Aberdeen Proving Ground

Director, USAMSAA  
ATTN: AMXSY-D  
    AMXSY-MP  
        Mr. H. Cohen  
    AMXSY-J  
        Mr. K. Jones  
        Mr. M. Carroll  
        Mr. J. Weaver  
        Mr. E. Heiss  
    AMXSY-GI  
        Mr. L. DeLattre

Commander, USATECOM  
ATTN: AMSTE-TO-F

Cdr, CRDEC, AMCCOM  
ATTN: SMCCR-MU  
    SMCCR-RSP-A  
        Mr. M. Miller  
        Mr. J. Huerta  
    SMCCR-SPS-IL

Director, USAHEL  
ATTN: SLCHE-IS  
    Mr. B. Corona  
    Mr. P. Ellis

Director, USACSTA  
ATTN: STECS-AS-LA  
    Mr. G. Niewenhous

USER EVALUATION SHEET/CHANGE OF ADDRESS

This laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers below will aid us in our efforts.

1. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_  
\_\_\_\_\_
2. How, specifically, is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_
3. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_  
\_\_\_\_\_
4. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_  
\_\_\_\_\_

BRL Report Number \_\_\_\_\_ Division Symbol \_\_\_\_\_

Check here if desire to be removed from distribution list. \_\_\_\_\_

Check here for address change. \_\_\_\_\_

Current address: Organization \_\_\_\_\_  
Address \_\_\_\_\_  
\_\_\_\_\_

-----FOLD AND TAPE CLOSED-----


Director  
U.S. Army Ballistic Research Laboratory  
ATTN: SLCBR-DD-T(NEI)  
Aberdeen Proving Ground, MD 21005-5066

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300



POSTAGE WILL BE PAID BY DEPARTMENT OF THE ARMY

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES



Director  
U.S. Army Ballistic Research Laboratory  
ATTN: SLCBR-DD-T(NEI)  
Aberdeen Proving Ground, MD 21005-9989